



HERMON LABORATORIES



ELECTRICAL TESTING
0839.01

Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 (a) and subpart B

FOR:

**Essence Security International Ltd.
Tag Reader
Model:ES700TR5
FCC ID:YXG-ES700TR5**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in the EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Periodic operation requirements	7
7.2	Field strength of emissions.....	11
7.3	Occupied bandwidth test.....	32
7.4	Antenna requirements	35
8	Unintentional emissions	36
8.1	Radiated emission measurements	36
9	APPENDIX A Test equipment and ancillaries used for tests.....	42
10	APPENDIX B Measurement uncertainties.....	43
11	APPENDIX C Test laboratory description	44
12	APPENDIX D Specification references	44
13	APPENDIX E Test equipment correction factors.....	45
14	APPENDIX F Abbreviations and acronyms.....	53
15	APPENDIX G Manufacturer's declaration	54



1 Applicant information

Client name: Essence Security International Ltd.
Address: 12 Abba Eban Avenue, Ackerstein Towers Bldg. D, P.O.B. 2073, Herzliya 4612001, Israel
Telephone: +972 73 244 7735
Fax: +972 9772 9962
E-mail: israelgo@essence-grp.com
Contact name: Mr. Israel Gottesman

2 Equipment under test attributes

Product name: Tag Reader
Product type: Transceiver
Model(s): ES700TR5
Serial number: 4013092e0032193b
Hardware version: 1
Software release: 3.0.2
Receipt date 24-Nov-13

3 Manufacturer information

Manufacturer name: Essence Security International Ltd.
Address: 12 Abba Eban Avenue, Ackerstein Towers Bldg. D, P.O.B. 2073, Herzliya 4612001, Israel
Telephone: +972 73 244 7735
Fax: +972 9772 9962
E-Mail: israelgo@essence-grp.com
Contact name: Mr. Israel Gottesman

4 Test details

Project ID: 25193
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 24-Nov-13
Test completed: 16-Dec-13
Test specification(s): FCC CFR 47 part 15 subpart C, §15.231(a), subpart B



5 Tests summary

Test	Status
Transmitter characteristics	
FCC Part 15, Section 231(a), Periodic operation requirements	Pass
FCC Part 15, Section 231(b), Field strength of emissions	Pass
FCC Part 15, Section 231(c), Occupied bandwidth	Pass
FCC Part 15, Section 207, Conducted emission	Not required
FCC Part 15, Section 203, Antenna requirements	Pass
Unintentional emissions	
FCC Part 15, Section 107, Conducted emission at AC power port	Not required
FCC Part 15, Section 109, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Chaplik, test engineer Mr. V. Einem, test engineer	December 16, 2013	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	December 29, 2013	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	January 8, 2014	




6 EUT description

6.1 General information

The EUT is a wireless access control tag reader operating at 916.5 MHz with 2FSK modulation. The EUT is equipped with an integral antenna and is powered by internal 4.5 V battery. The reader contains the RFID technology transmitter operating at 13.56 MHz.

6.2 Test configuration

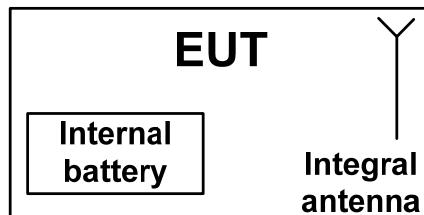

6.3 Changes made in the EUT

No changes were implemented in the EUT during testing.



6.4 Transmitter characteristics

Type of equipment											
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)										
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)										
	Plug-in card (Equipment intended for a variety of host systems)										
Operating frequency											
	916.5 MHz										
Maximum rated output power											
	At transmitter 50 Ω RF output connector										
	Field strength at 3 m distance										
	94.26 dB(µV/m) – peak 72.16 dB(µV/m) -average										
Is transmitter output power variable?											
	X	No									
	Yes		continuous variable								
			stepped variable with stepsize								
			minimum RF power								
			maximum RF power								
Antenna connection											
	unique coupling		standard connector	X	integral	X with temporary RF connector without temporary RF connector					
Antenna/s technical characteristics											
Type	Manufacturer	Model number									
Integral	Essence Security	Built-in wire antenna									
Type of modulation	2FSK										
Transmitter power source											
X	Battery	Nominal rated voltage	4.5 VDC								
	DC	Nominal rated voltage	VDC								
	AC mains	Nominal rated voltage	Frequency								
Common power source for transmitter and receiver			X	yes		no					



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance		Verdict: PASS
Date(s):			
Temperature: °C	Air Pressure: hPa	Relative Humidity: %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1.

7.1.3 Test procedure for measurements of polling / supervision transmission duration

7.1.3.1 The EUT was set up as shown in Figure 7.1.1.

7.1.3.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.3.3 The transmission time was captured and shown in Plot 7.1.2, Plot 7.1.3. The test results recorded in Table 7.1.2.

Figure 7.1.1 Setup for transmitter shut down test






HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict: PASS	
Date(s):			
Temperature: °C	Air Pressure: hPa	Relative Humidity: %	Power Supply: Battery
Remarks:			

Table 7.1.1 Periodic operation requirements



Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	NA
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	Plot 7.1.3	Comply
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	NA	NAA

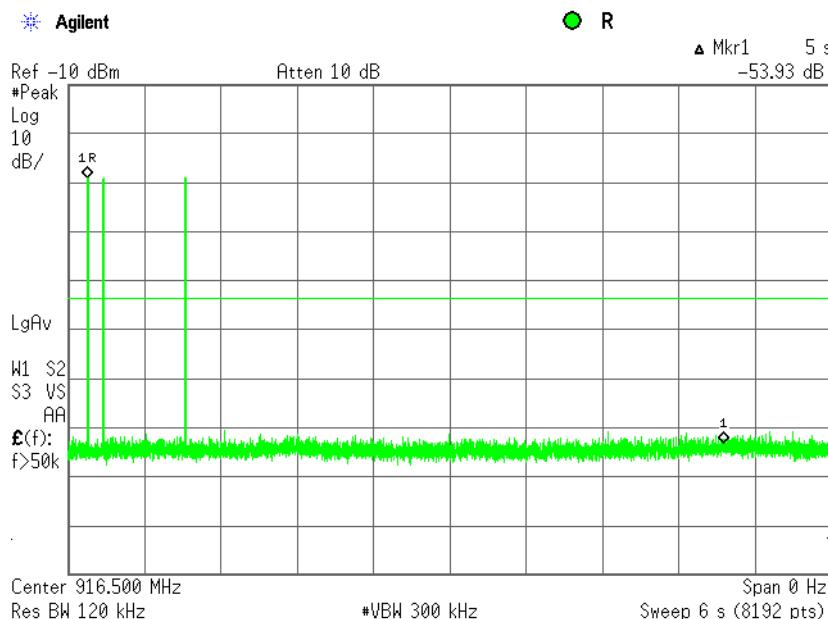Plot 7.1.1 Transmitter shut down test result



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict: PASS	
Date(s):		Temperature: °C	Air Pressure: hPa
Remarks:		Relative Humidity: %	Power Supply: Battery

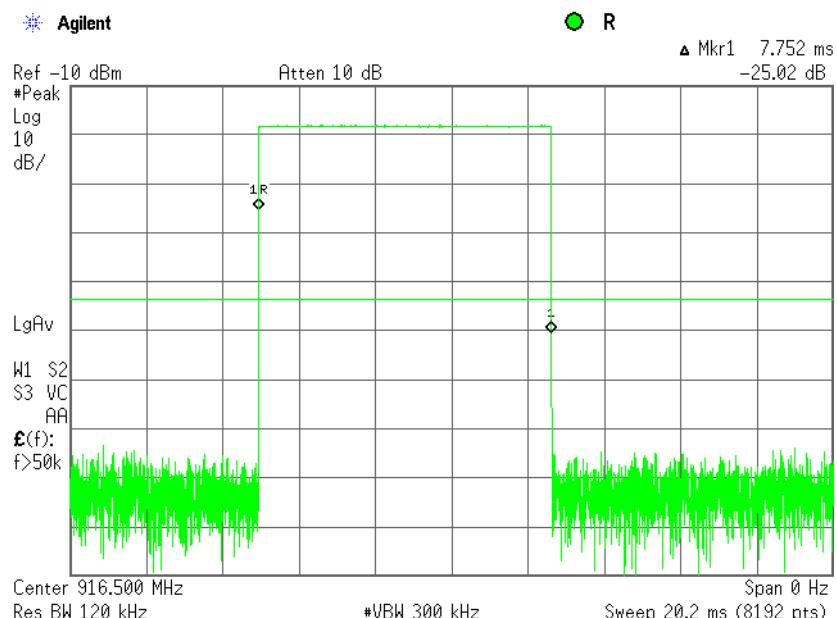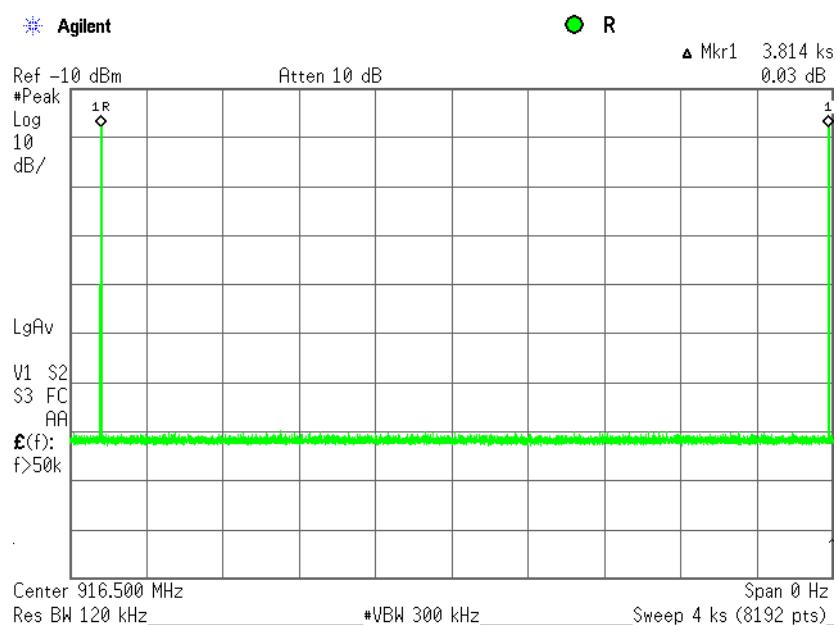Plot 7.1.2 Polling / supervision pulse duration**Plot 7.1.3 Polling / supervision transmission duration**



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict: PASS	
Date(s):		Temperature: °C	Air Pressure: hPa
		Relative Humidity: %	Power Supply: Battery
Remarks:			

Table 7.1.2 Total duration of polling / supervision transmissions

Duration, ms	Repetition period, ms	Maximum number of transmissions within 1 hour	Total duration within 1 hour, ms
7.752	3814	1	7.752

Reference numbers of test equipment used

HL 0337	HL 2909	HL 4274				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
916.5	102	82

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**		
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705		73.8 – 63.0**			
1.705 – 30.0*		69.5			
30 – 88	NA	40.0	NA		
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log(S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$\text{Lim}_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$\text{Lim}_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.


7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

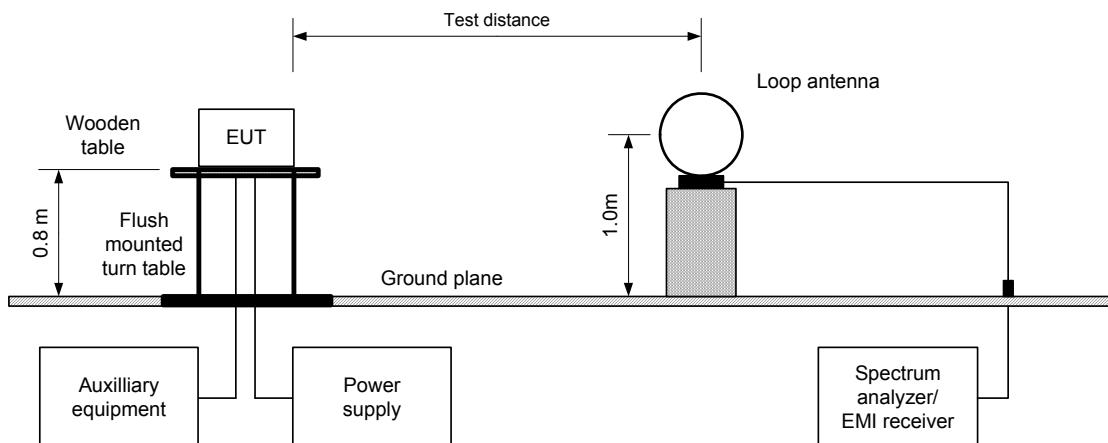




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz

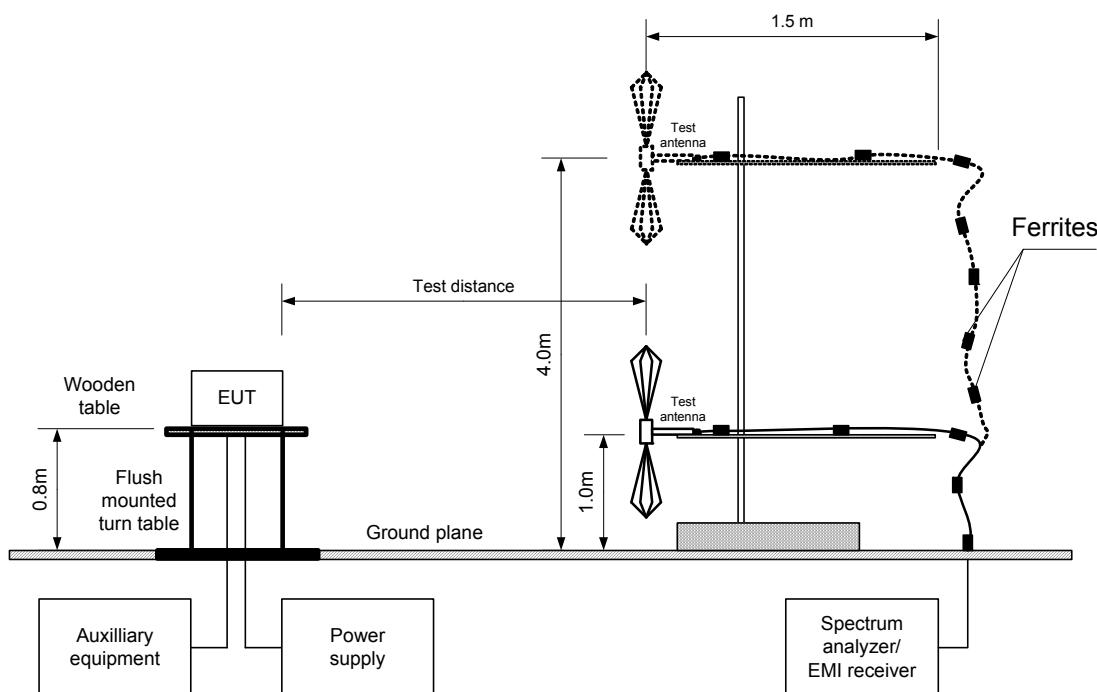



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: 2FSK
 BIT RATE: 38.4 kbps
 INVESTIGATED FREQUENCY RANGE: 0.009 - 9200 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 1.0 MHz (above 1000 MHz)
 ≥ Resolution bandwidth
 VIDEO BANDWIDTH:
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict	
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)		
Fundamental emission***											
916.5	V	1.2	171	94.26	102.0	-7.74	94.26	72.16	82.0	-9.84	Pass
Spurious emissions											
1832.994	H	1.0	350	60.09	82.0	-21.91	59.68	37.58	62.0	-24.42	Pass
2749.511	V	1.0	360	61.72	74.0	-12.28	61.57	39.47	54.0	-14.53	
3665.978	V	1.0	360	62.38	74.0	-11.62	61.74	39.64	54.0	-14.36	
4582.517	V	1.0	270	55.18	74.0	-18.82	53.77	31.67	54.0	-22.33	
5498.950	V	1.2	50	59.22	82.0	-22.78	58.06	35.96	62.0	-26.04	
6415.533	V	1.2	50	59.52	82.0	-22.48	57.77	35.67	62.0	-26.33	
7332.066	V	1.5	325	57.15	74.0	-16.85	52.81	30.71	54.0	-23.29	
8248.616	H	1.5	330	57.28	74.0	-16.72	53.10	31.00	54.0	-23.00	
9165.149	V	1.8	20	60.84	74.0	-13.16	57.73	35.63	54.0	-18.37	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
760.5	37.9	36.1	46.0	-9.9	Horizontal	1.0	150	Pass



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Maximum pulse during 100 ms	Duration, ms	Period, ms		
7.833	1	NA	NA	NA	-22.1

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0583	HL 0604	HL 1984	HL 2780	HL 2871	HL 4150
HL 4278	HL 4353						

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE: 3 m
 EUT POSITION: Typical (Vertical)
 MODULATION: 2FSK
 BIT RATE: 38.4 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353				
---------	---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.2.7 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

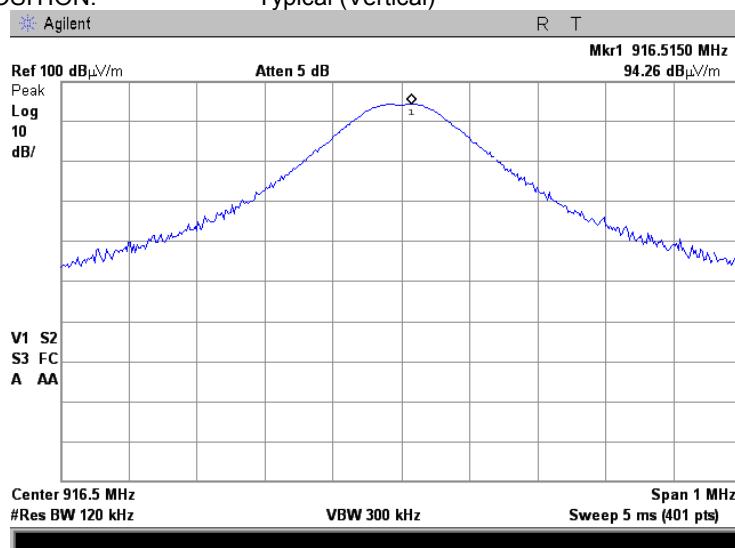**Plot 7.2.2 Radiated emission measurements at the fundamental frequency**

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

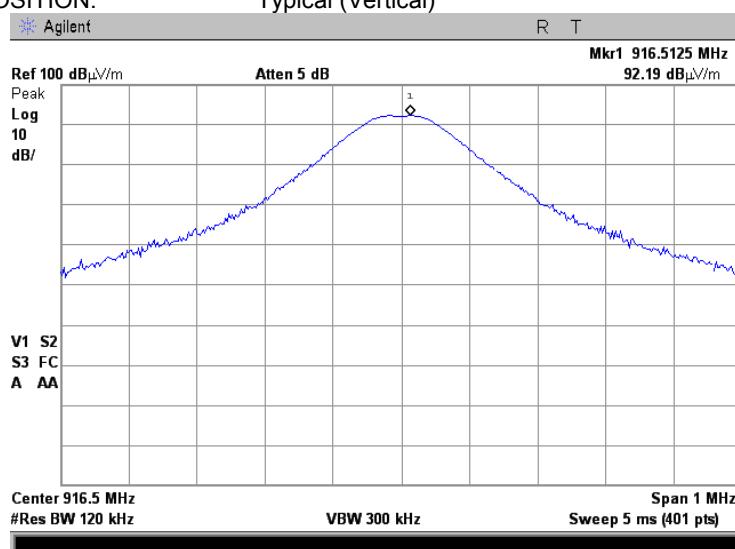




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Plot 7.2.3 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

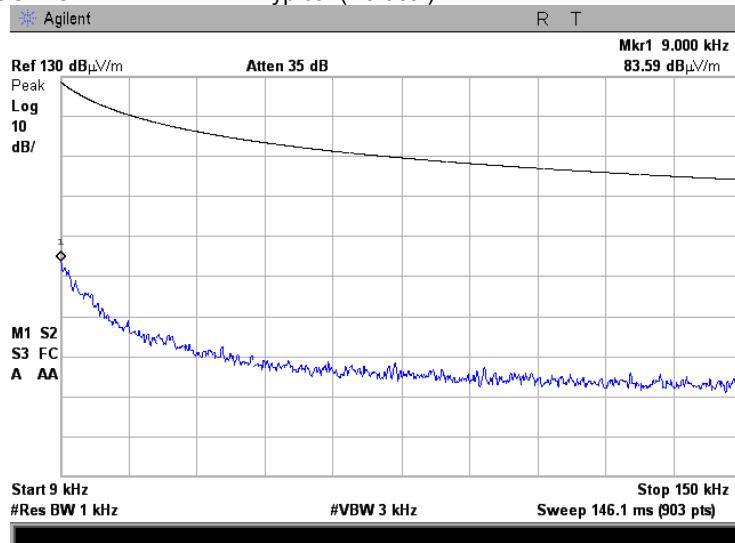**Plot 7.2.4 Radiated emission measurements from 0.15 to 30 MHz**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

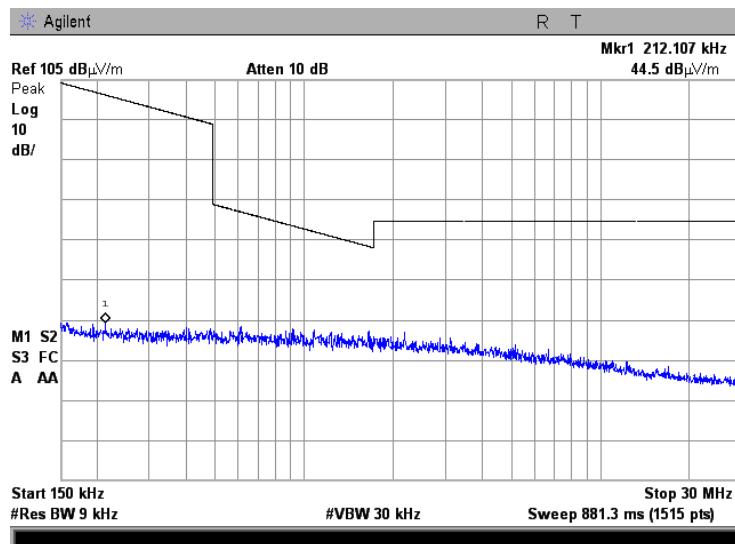




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Plot 7.2.5 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

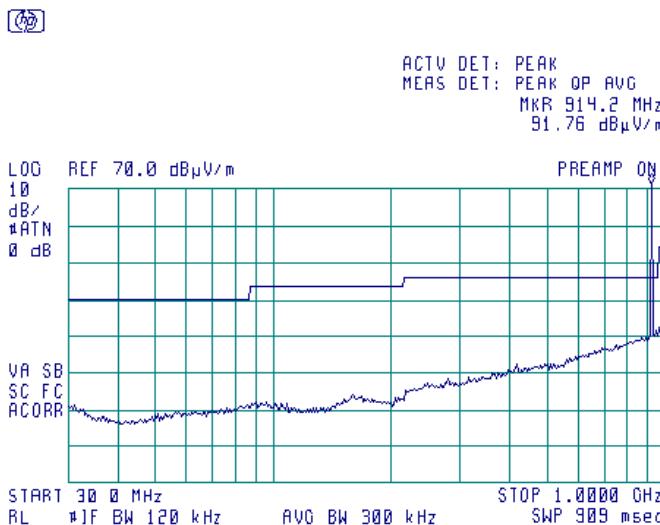**Plot 7.2.6 Radiated emission measurements from 30 to 1000 MHz**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

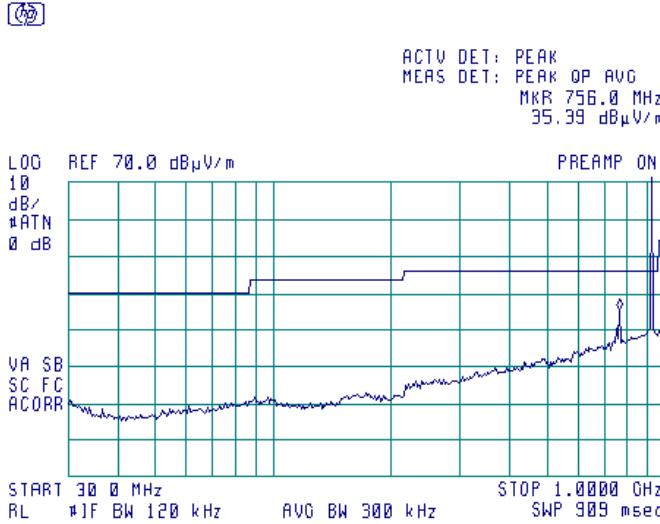




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			


Plot 7.2.7 Radiated emission measurements from 1000 to 9200 MHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Typical (Vertical)

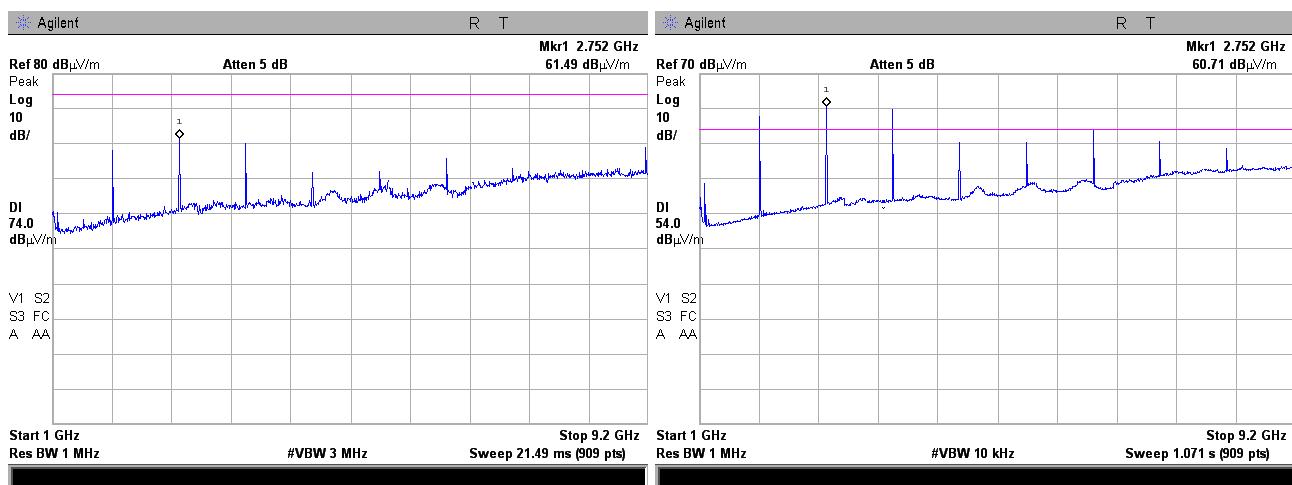

Plot 7.2.8 Radiated emission measurements from 1000 to 9200 MHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Typical (Vertical)

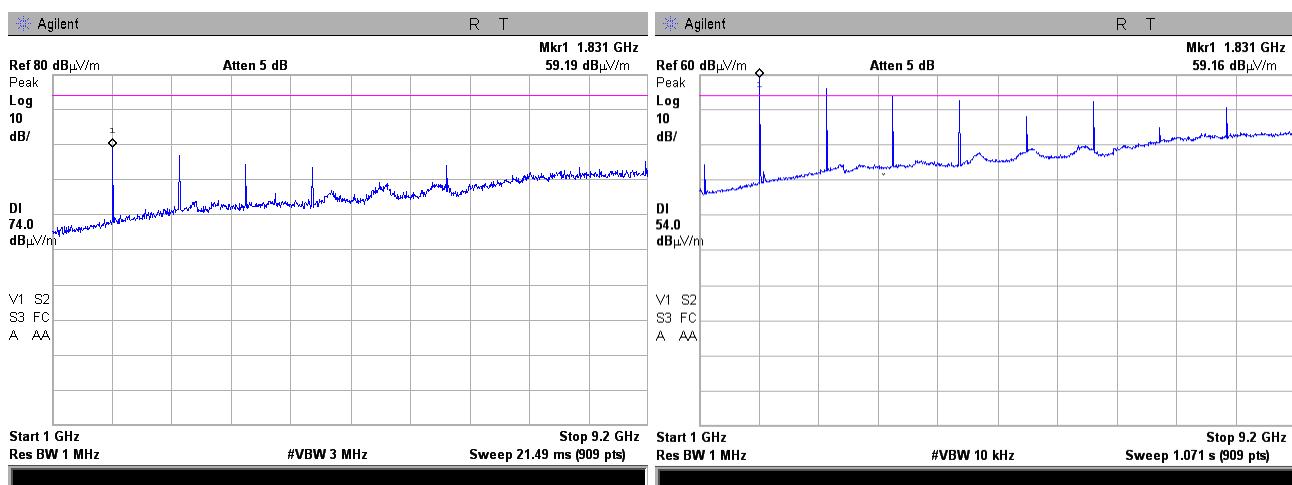




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			


Plot 7.2.9 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

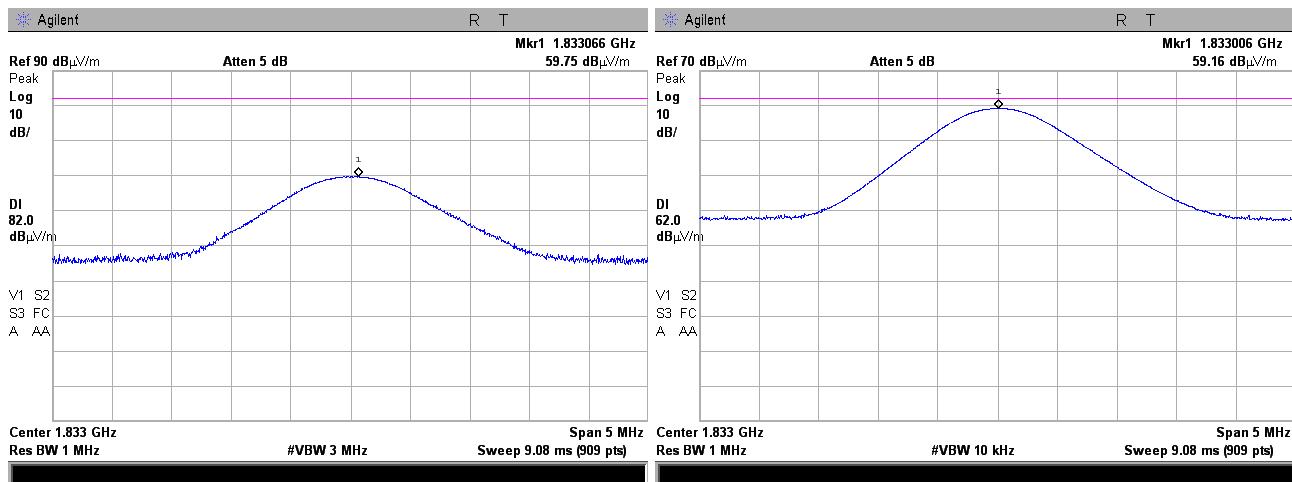

Plot 7.2.10 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

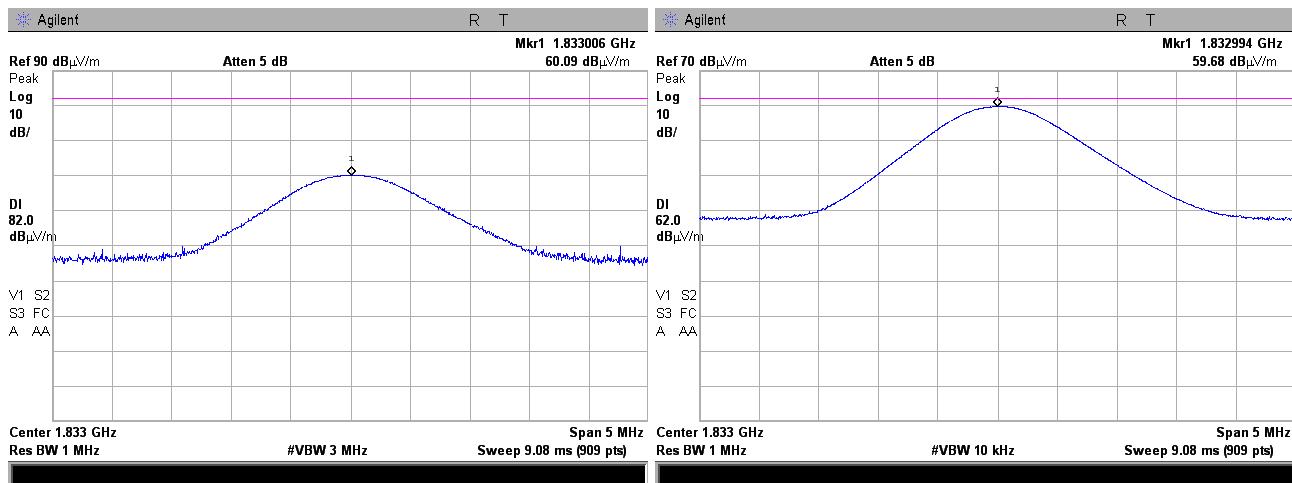




HERMON LABORATORIES


Test specification: FCC Part 15, Section 231(b), Field strength of emissions	
Test procedure:	ANSI C63.4, Section 13.1.4
Test mode:	Compliance
Date(s):	25-Nov-13 - 09-Dec-13
Temperature: 24 °C	Air Pressure: 1014 hPa
Remarks:	Relative Humidity: 43 % Power Supply: Battery

Plot 7.2.11 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

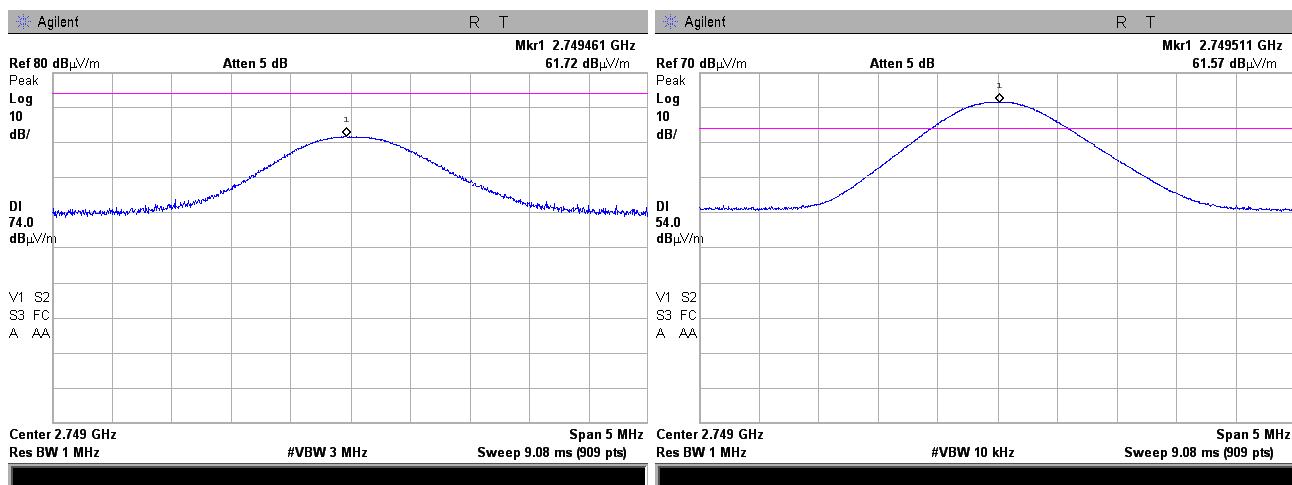**Plot 7.2.12 Radiated emission measurements at the third harmonic frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

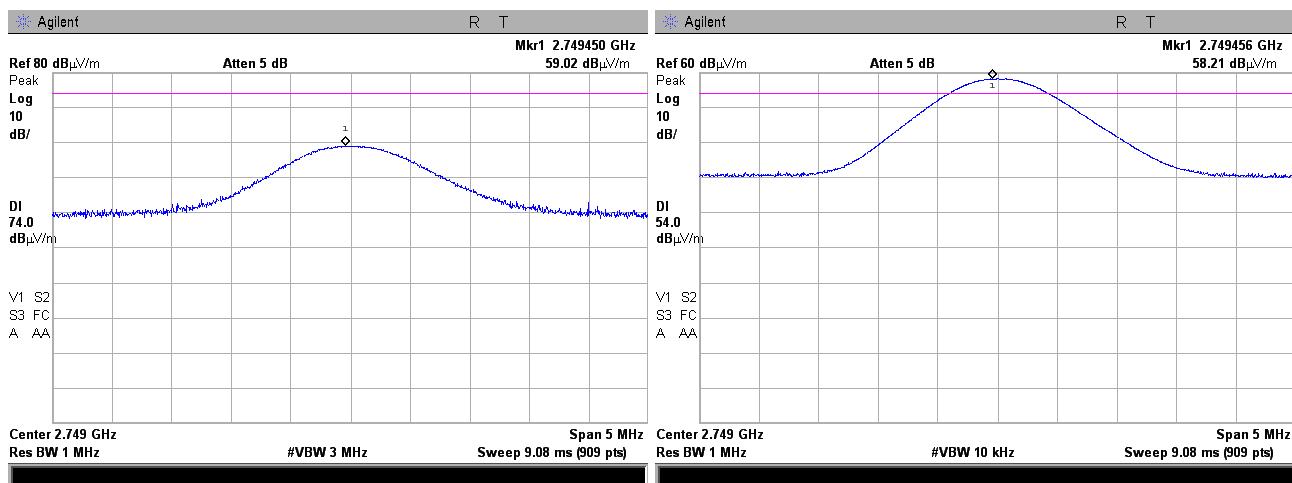




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			


Plot 7.2.13 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

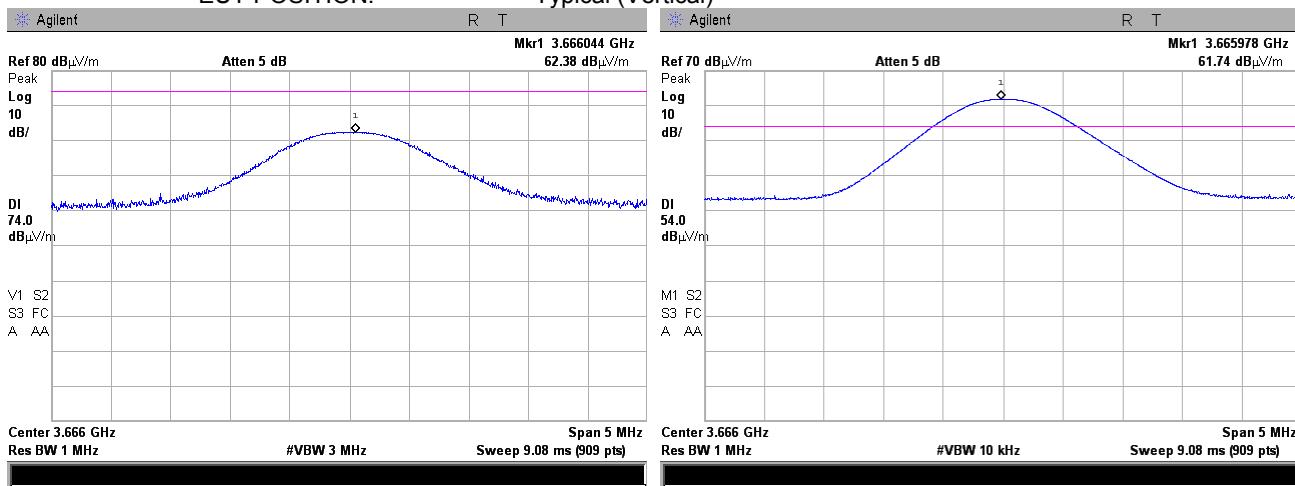

Plot 7.2.14 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

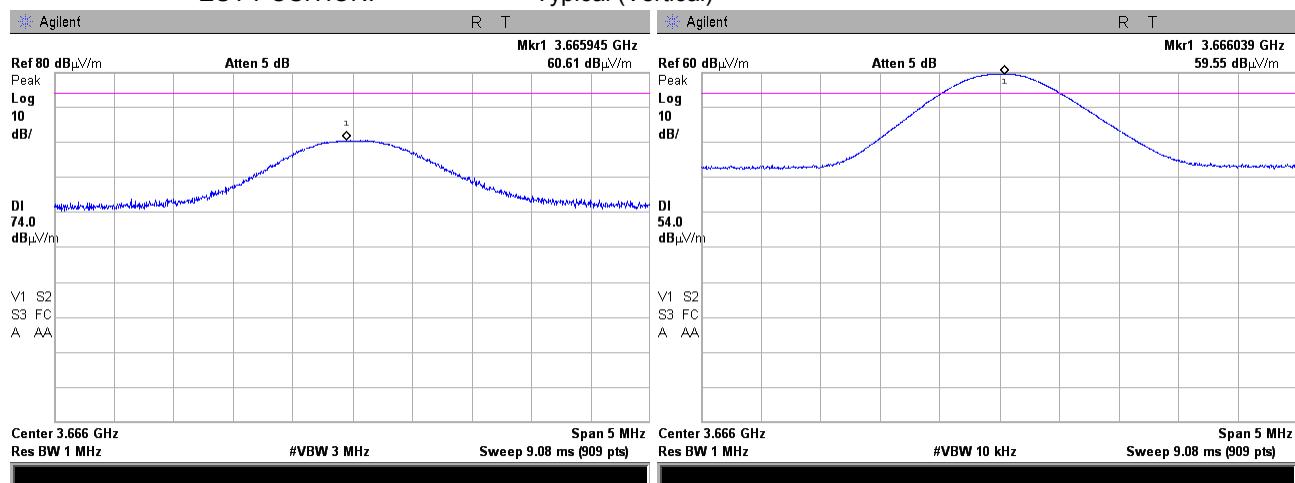




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			


Plot 7.2.15 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

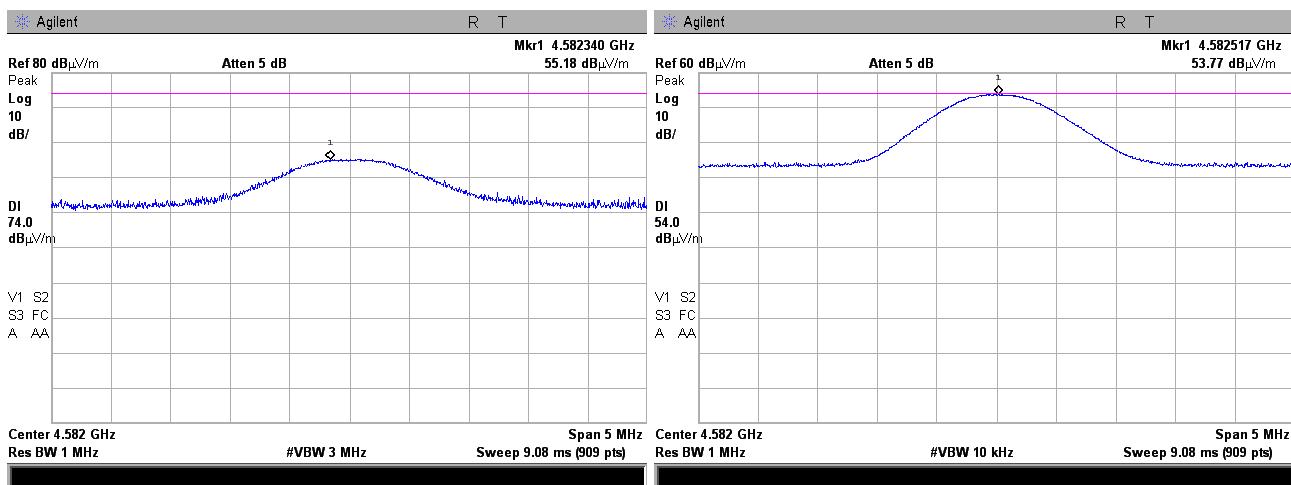

Plot 7.2.16 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

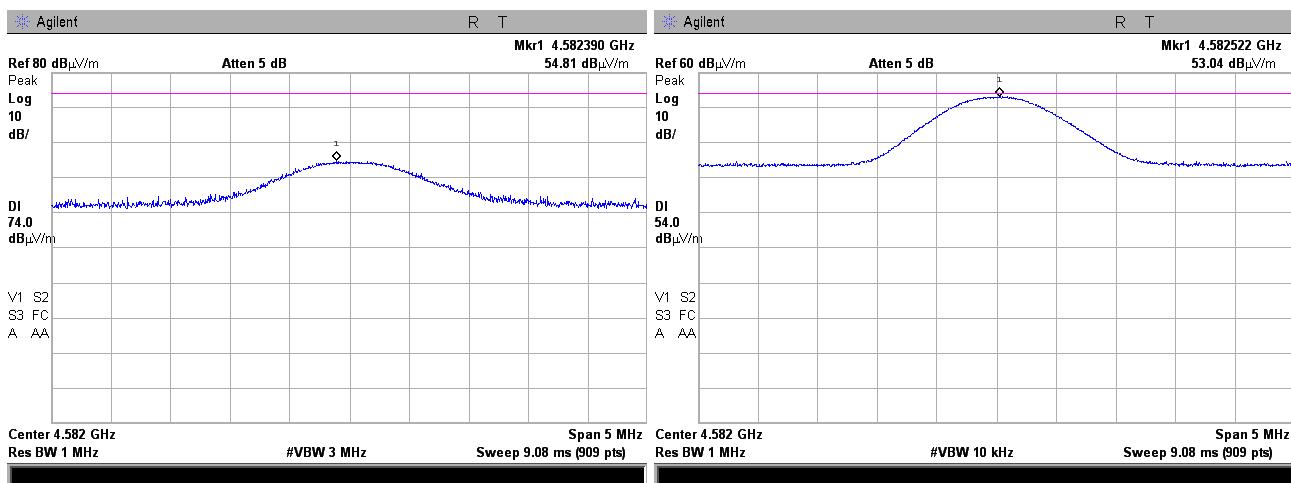




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			


Plot 7.2.17 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

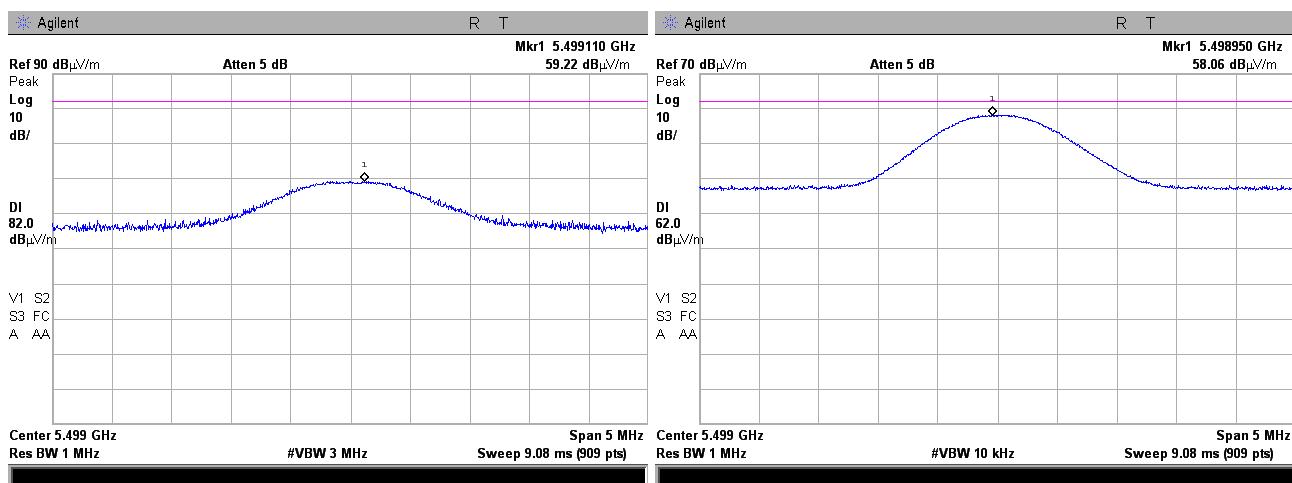

Plot 7.2.18 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

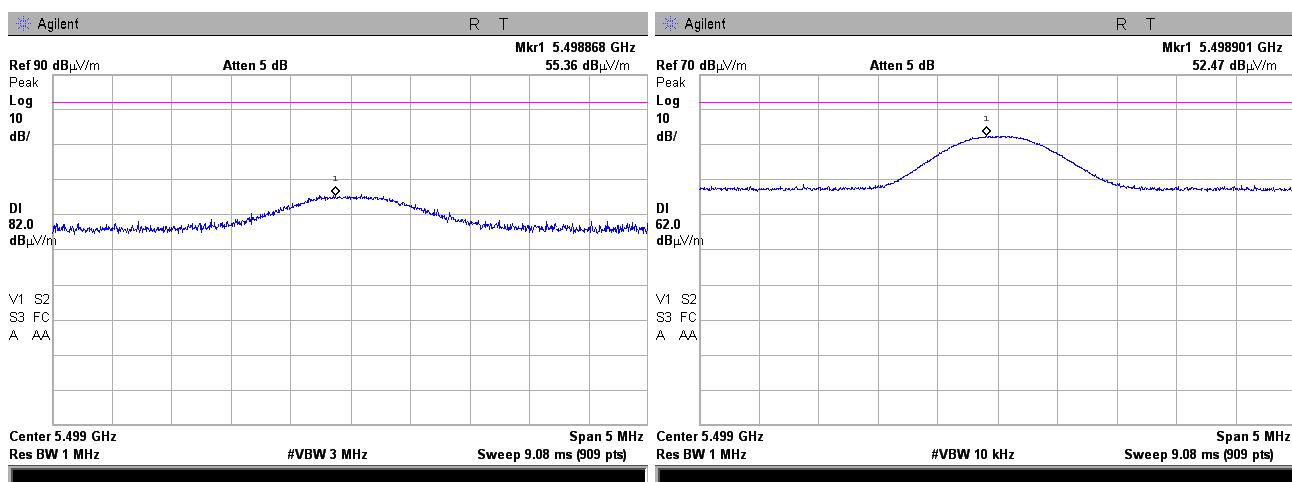




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			


Plot 7.2.19 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Typical (Vertical)

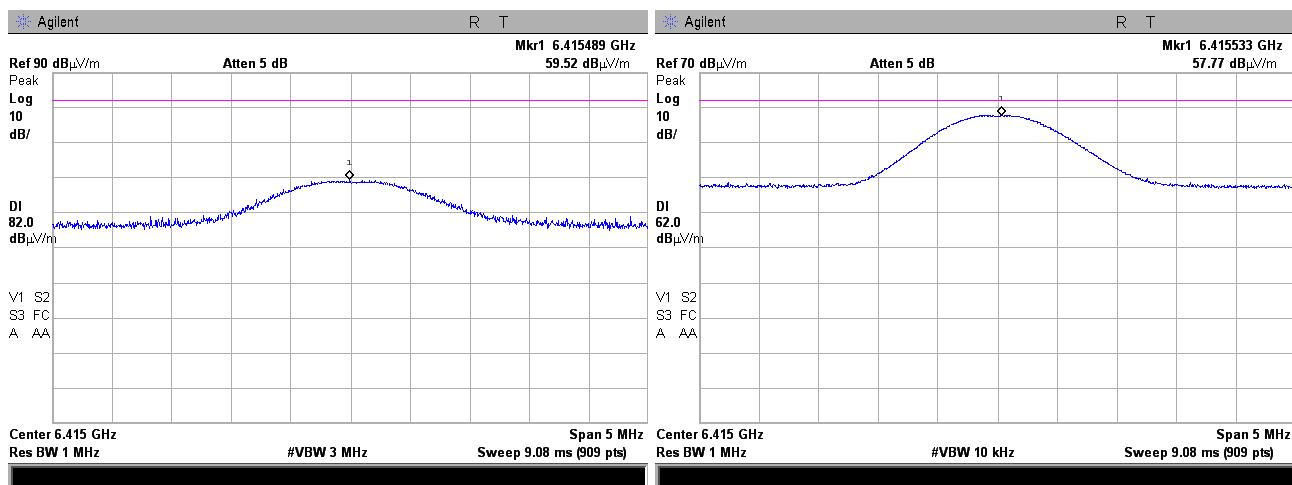

Plot 7.2.20 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Typical (Vertical)

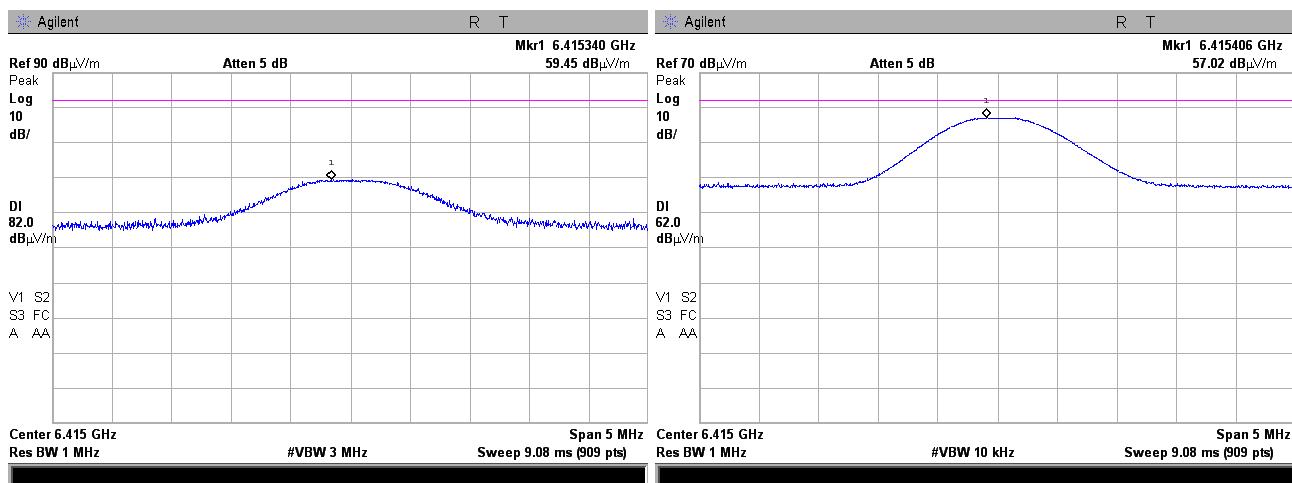




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			


Plot 7.2.21 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

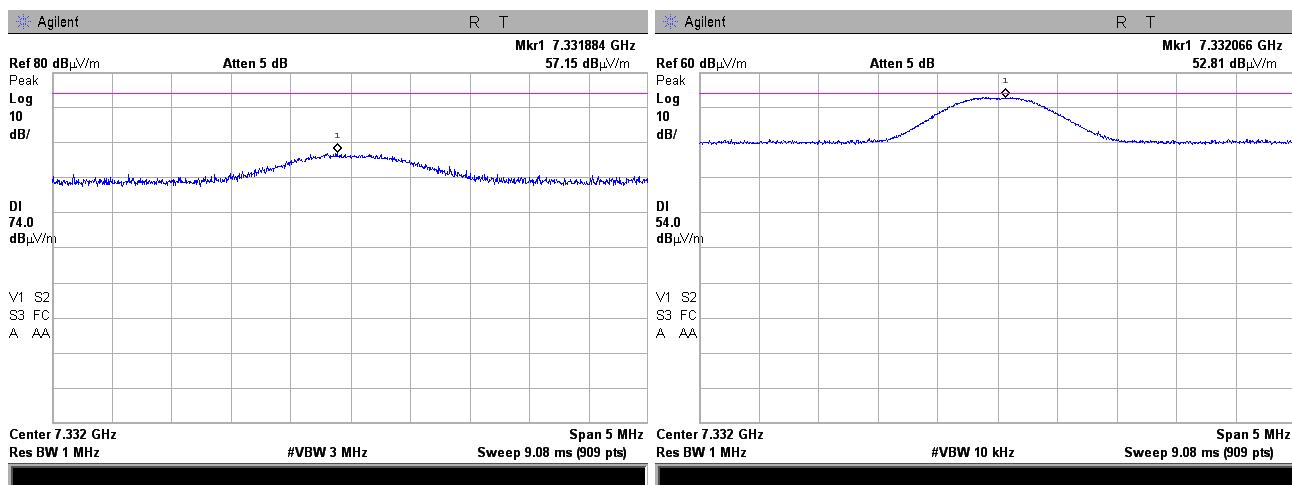

Plot 7.2.22 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

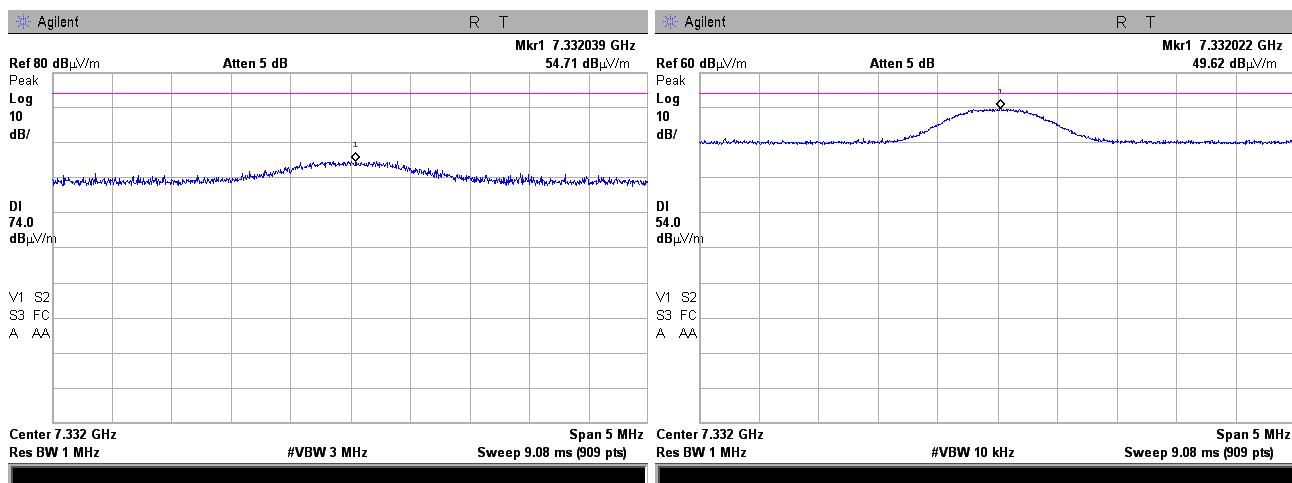




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			


Plot 7.2.23 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Typical (Vertical)

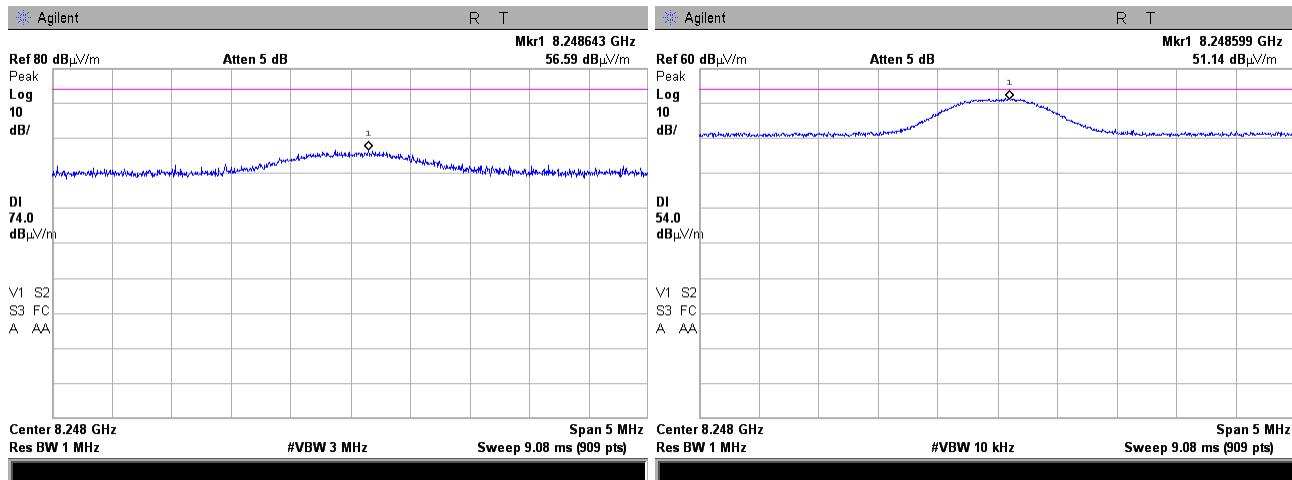

Plot 7.2.24 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Typical (Vertical)

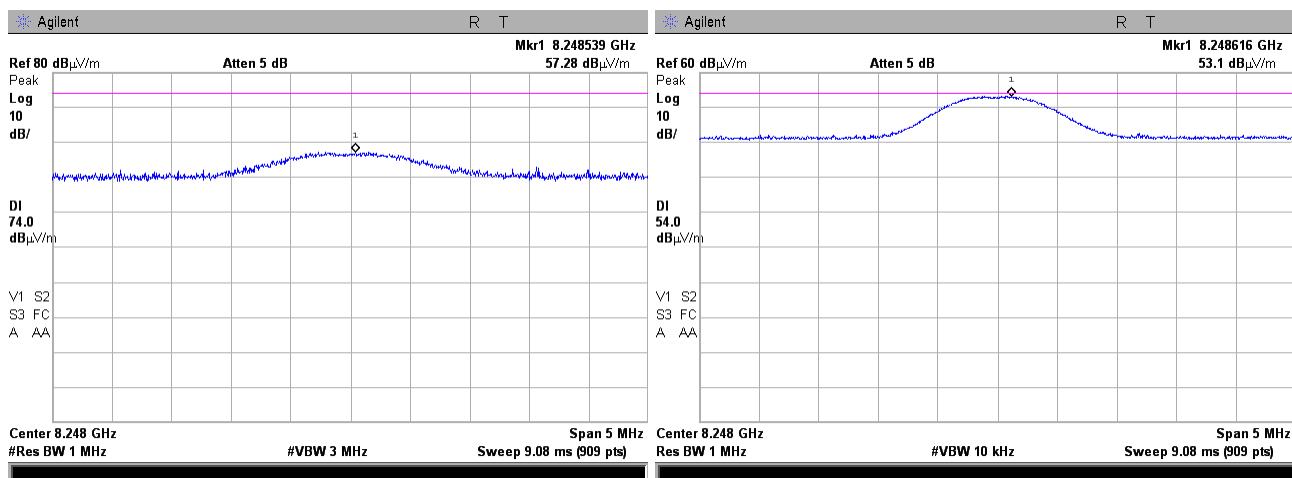




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			


Plot 7.2.25 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Typical (Vertical)

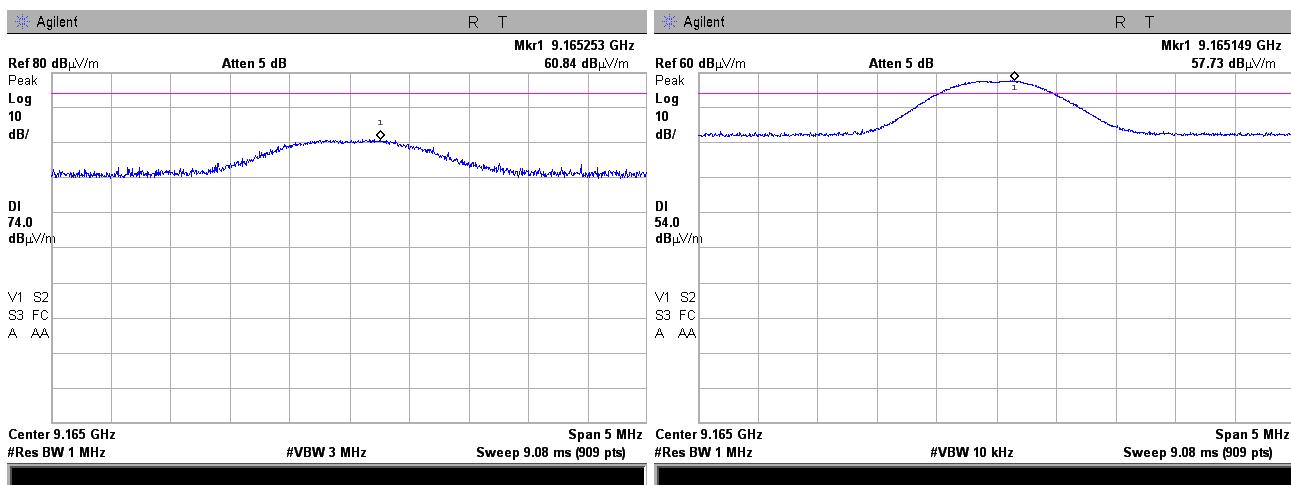

Plot 7.2.26 Radiated emission measurements at the tenth harmonic frequency



TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal

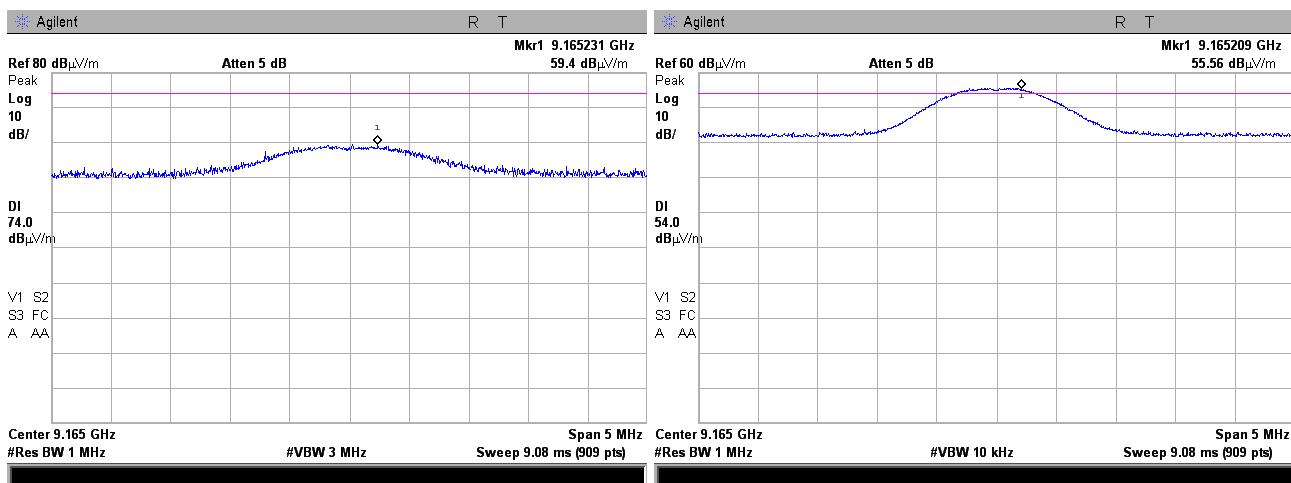



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Nov-13 - 09-Dec-13		
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

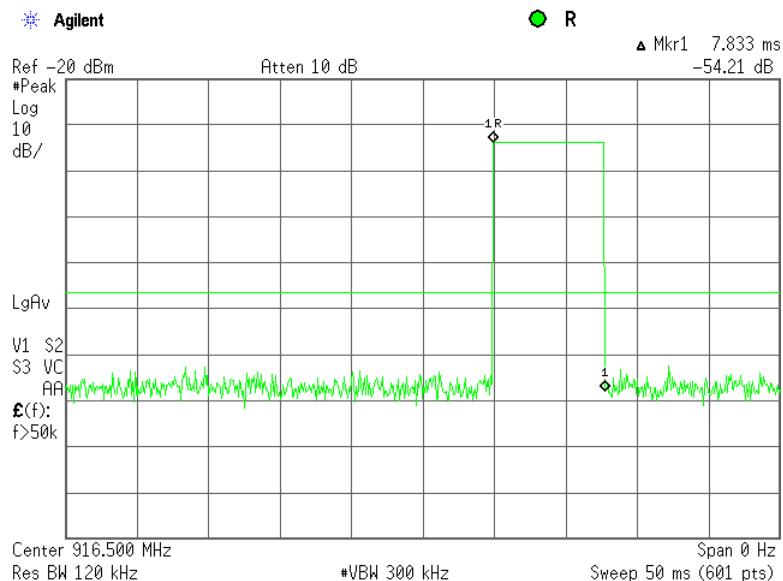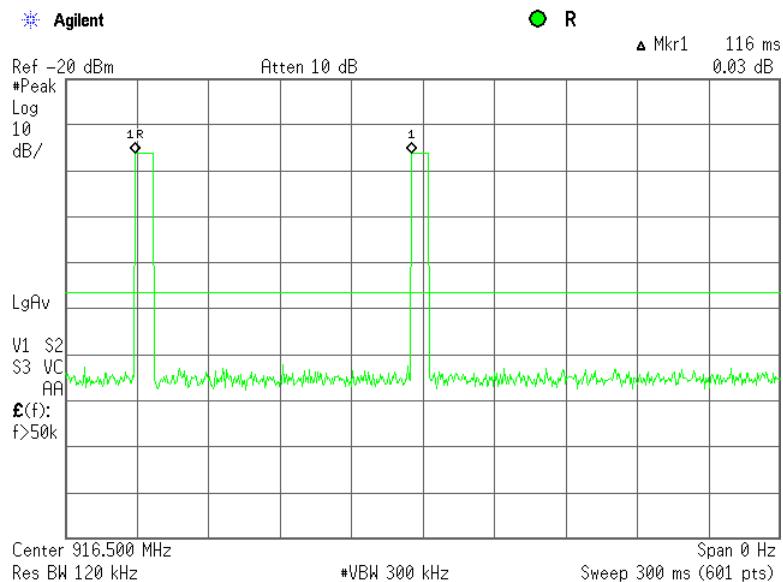Plot 7.2.27 Transmission pulse duration**Plot 7.2.28 Transmission pulse period**



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(c), Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	09-Dec-13		
Temperature: 23 °C	Air Pressure: 1020 hPa	Relative Humidity: 41 %	Power Supply: Battery
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900		0.25
Above 900	20.0	0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT was set to transmit modulated carrier.
- 7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.

Figure 7.3.1 Occupied bandwidth test setup





HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(c), Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict: PASS	
Date(s):	09-Dec-13		
Temperature: 23 °C	Air Pressure: 1020 hPa	Relative Humidity: 41 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
RESOLUTION BANDWIDTH: 10 kHz
VIDEO BANDWIDTH: 30 kHz
MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
MODULATION: 2FSK
MODULATING SIGNAL: PRBS
BIT RATE: 38.4 kbps

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
916.5	89.5	0.5	4582.5	-4493	Pass

Reference numbers of test equipment used


HL 3818	HL 4135	HL 4274					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(c), Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	09-Dec-13		
Temperature: 23 °C	Air Pressure: 1020 hPa	Relative Humidity: 41 %	Power Supply: Battery
Remarks:			

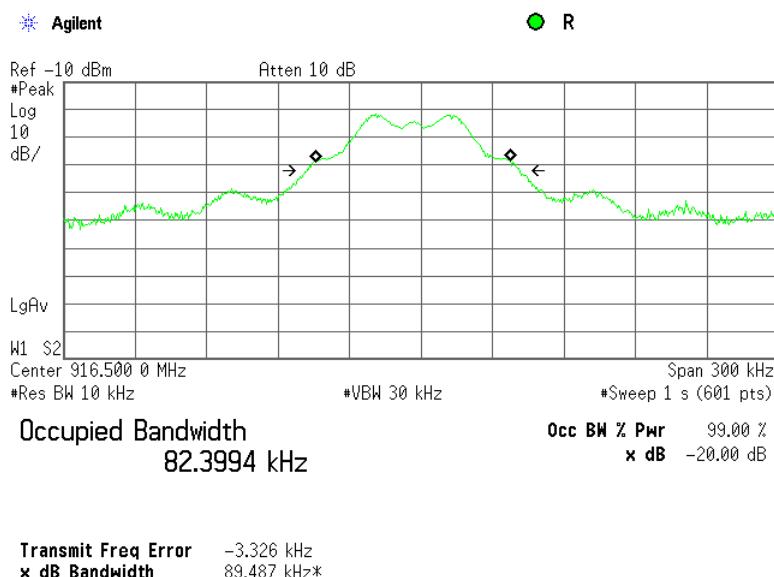Plot 7.3.1 Occupied bandwidth test result



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 203, Antenna requirements		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Dec-13		
Temperature: 25 °C	Air Pressure: 1027 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

7.4 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly

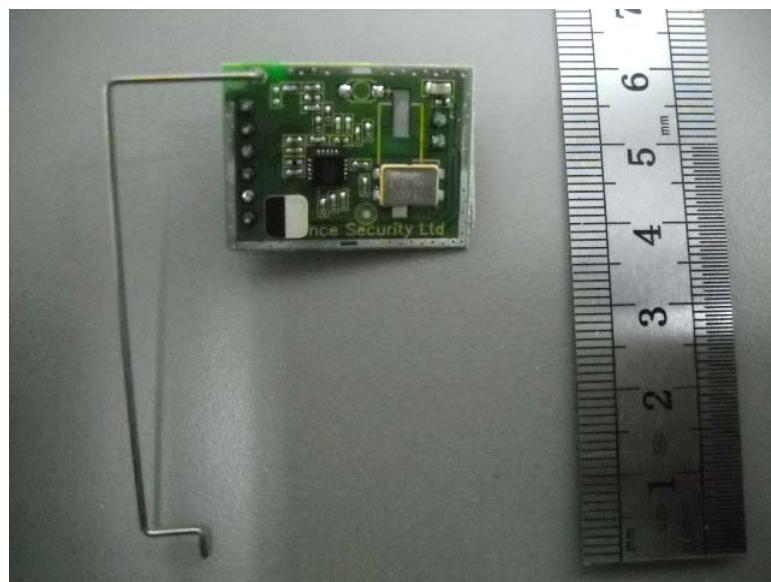



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Nov-13 - 03-Dec-13		
Temperature: 23.1 °C	Air Pressure: 1018 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission limits

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 th harmonic**	43.5*	54.0	49.5	60.0*

* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.1.2 Test procedure for measurements in semi-anechoic chamber


- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.
- 8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.1.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Nov-13 - 03-Dec-13		
Temperature: 23.1 °C	Air Pressure: 1018 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

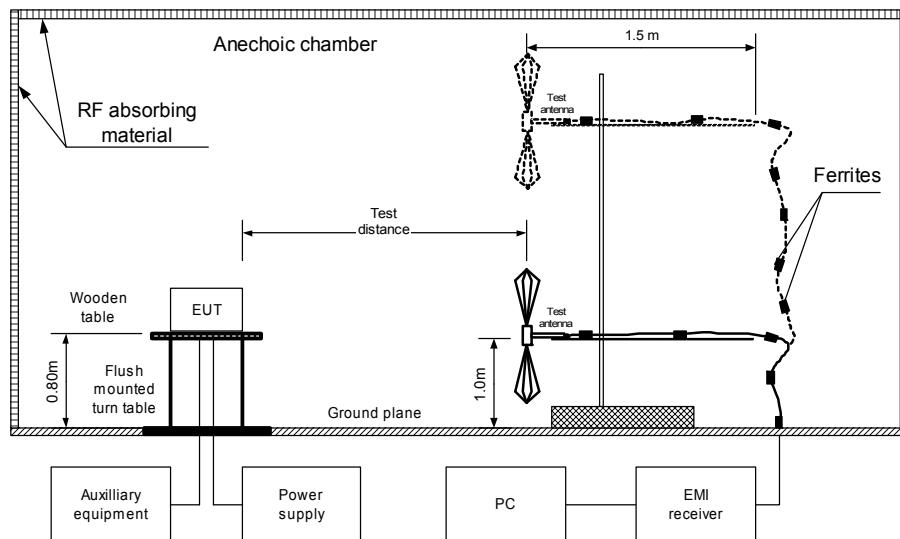

Photograph 8.1.1 Setup for radiated emission measurements






HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Nov-13 - 03-Dec-13		
Temperature: 23.1 °C	Air Pressure: 1018 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Photograph 8.1.2 Setup for radiated emission measurements, general view

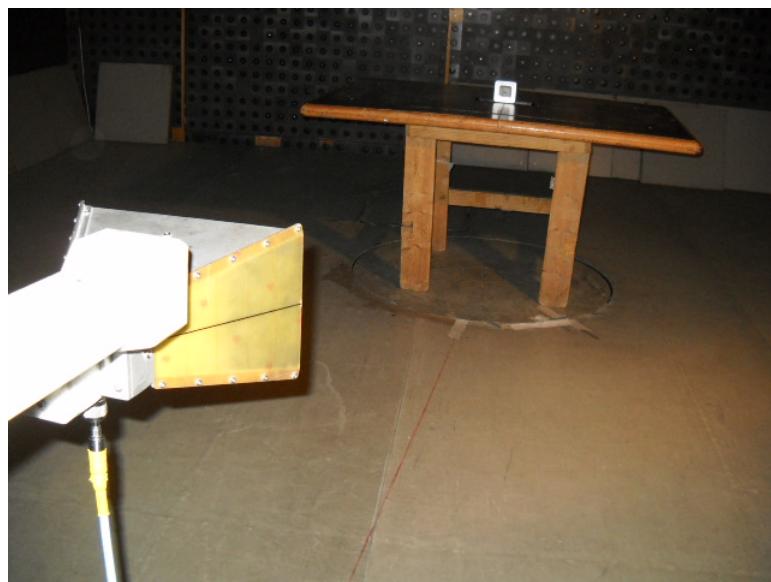



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Nov-13 - 03-Dec-13		
Temperature: 23.1 °C	Air Pressure: 1018 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
 LIMIT: Class B
 EUT OPERATING MODE: Stand-by / Receive
 TEST SITE: SEMI ANECHOIC CHAMBER

DETECTORS USED: PEAK / QUASI-PEAK
 TEST DISTANCE: 3 m
 FREQUENCY RANGE: 30 MHz – 1000 MHz
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								

DETECTORS USED: PEAK / AVERAGE
 FREQUENCY RANGE: 1000 MHz - 5000 MHz
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found										

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 2780	HL 2871	HL 4160	HL 4353	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Nov-13 - 03-Dec-13		
Temperature: 23.1 °C	Air Pressure: 1018 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by / Receive

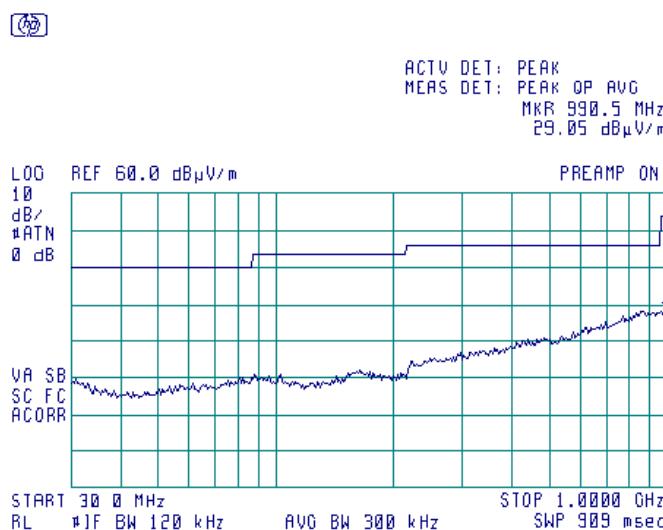**Plot 8.1.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by / Receive

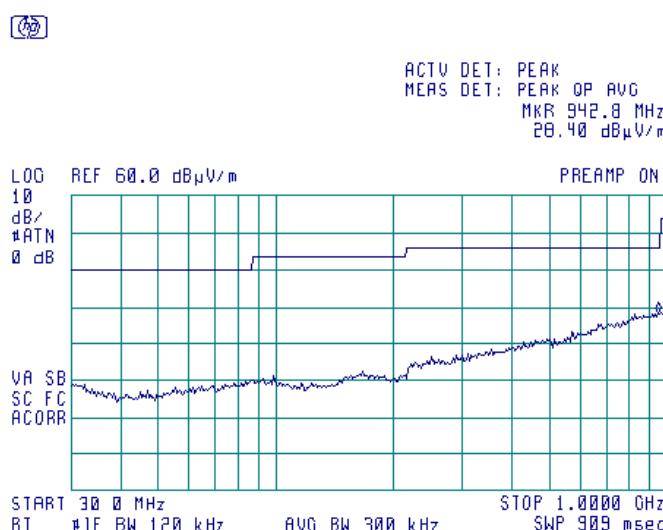




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Nov-13 - 03-Dec-13		
Temperature: 23.1 °C	Air Pressure: 1018 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 8.1.3 Radiated emission measurements above 1000 MHz, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by / Receive

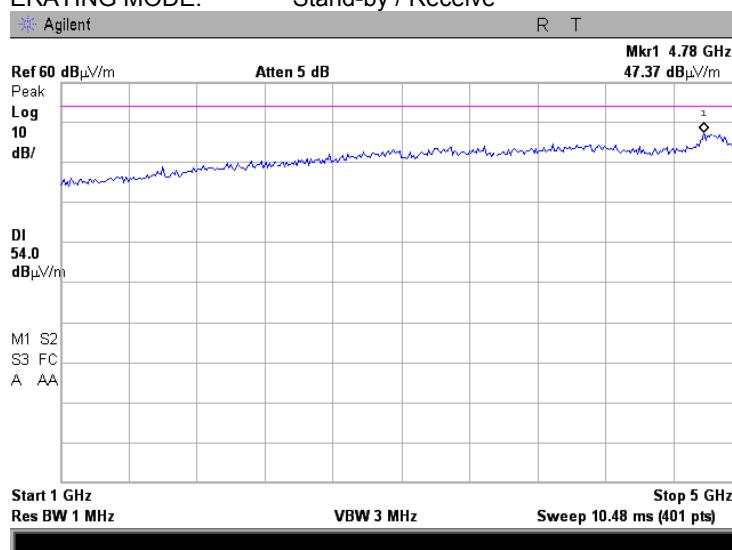**Plot 8.1.4 Radiated emission measurements above 1000 MHz, horizontal antenna polarization**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by / Receive

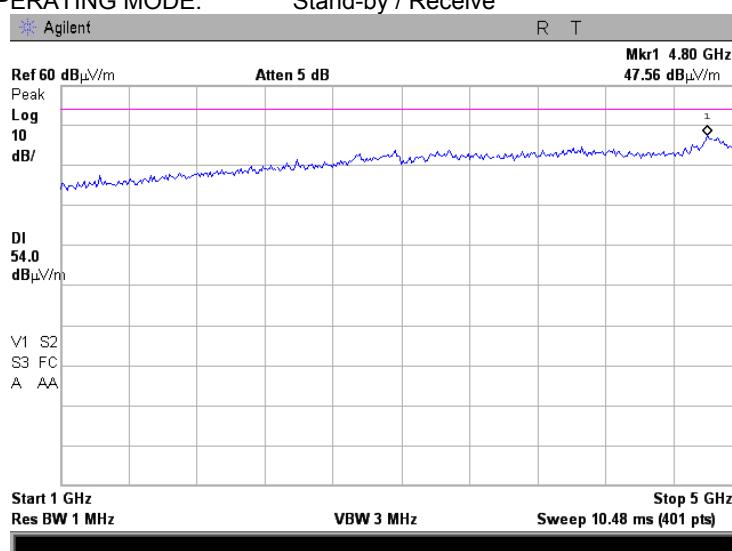



HERMON LABORATORIES

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	09-Jun-13	09-Jun-14
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-12	03-Jul-14
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	28-Oct-13	28-Oct-14
0583	Antenna, Log Periodic, 200 - 1000 MHz	Hermon Laboratories	LP 200/1000	035	11-Jul-13	11-Jul-14
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	04-Jun-13	04-Jun-14
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	07-Dec-12	07-Jan-14
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	10-Jul-13	10-Jul-14
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	04-Dec-13	04-Dec-14
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	23-Dec-13	23-Dec-14
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	24-Apr-13	24-Apr-14
4135	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000 136	09-Apr-13	09-Apr-14
4150	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 91	01-Jul-13	01-Jul-14
4160	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 94	11-Aug-13	11-Aug-14
4274	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT-SMNM+	70047	27-Nov-13	27-Nov-14
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	27-Nov-13	27-Nov-14
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	06-Mar-13	06-Mar-14



HERMON LABORATORIES

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 10 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2012	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



HERMON LABORATORIES

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Log periodic antenna
Hermon Laboratories, model LP 200/1000
Ser.No.035, HL 0583

Frequency, MHz	Antenna factor, dB(1/m)
200	12.0
250	12.5
300	14.5
350	15.7
400	16.0
450	16.7
500	18.1
550	18.2
600	18.8
650	20.1
700	21.8
750	21.4
800	21.4
850	22.4
900	22.8
950	23.4
1000	24.6

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



HERMON LABORATORIES

Cable loss**Test cable, Mini-Circuits, S/N 70047, 18 GHz, 1.8 m, SMA/M - N/M
CBL-6FT-SMNM+, HL 4274**

Frequency, MHz	Cable loss, dB						
10	0.07	4800	1.69	9800	2.62	14800	3.42
30	0.11	4900	1.70	9900	2.63	14900	3.39
50	0.14	5000	1.72	10000	2.64	15000	3.38
100	0.21	5100	1.75	10100	2.64	15100	3.40
200	0.26	5200	1.76	10200	2.66	15200	3.41
300	0.30	5300	1.77	10300	2.67	15300	3.40
400	0.37	5400	1.79	10400	2.68	15400	3.39
500	0.44	5500	1.82	10500	2.68	15500	3.41
600	0.49	5600	1.85	10600	2.70	15600	3.44
700	0.54	5700	1.86	10700	2.71	15700	3.46
800	0.58	5800	1.87	10800	2.73	15800	3.45
900	0.63	5900	1.91	10900	2.74	15900	3.47
1000	0.67	6000	1.94	11000	2.76	16000	3.51
1100	0.71	6100	1.97	11100	2.77	16100	3.56
1200	0.75	6200	1.98	11200	2.78	16200	3.55
1300	0.78	6300	1.99	11300	2.79	16300	3.54
1400	0.81	6400	2.02	11400	2.80	16400	3.57
1500	0.85	6500	2.05	11500	2.82	16500	3.62
1600	0.88	6600	2.06	11600	2.83	16600	3.61
1700	0.91	6700	2.06	11700	2.84	16700	3.60
1800	0.94	6800	2.08	11800	2.85	16800	3.62
1900	0.97	6900	2.10	11900	2.87	16900	3.68
2000	1.00	7000	2.12	12000	2.88	17000	3.70
2100	1.03	7100	2.12	12100	2.89	17100	3.68
2200	1.06	7200	2.13	12200	2.90	17200	3.70
2300	1.08	7300	2.16	12300	2.92	17300	3.80
2400	1.11	7400	2.19	12400	2.94	17400	3.84
2500	1.14	7500	2.22	12500	2.95	17500	3.83
2600	1.16	7600	2.23	12600	2.96	17600	3.83
2700	1.19	7700	2.26	12700	2.98	17700	3.86
2800	1.21	7800	2.30	12800	3.00	17800	3.86
2900	1.27	7900	2.33	12900	3.02	17900	3.80
3000	1.29	8000	2.35	13000	3.03	18000	3.79
3100	1.32	8100	2.37	13100	3.06		
3200	1.35	8200	2.41	13200	3.08		
3300	1.37	8300	2.44	13300	3.09		
3400	1.38	8400	2.47	13400	3.10		
3500	1.41	8500	2.48	13500	3.13		
3600	1.43	8600	2.51	13600	3.17		
3700	1.46	8700	2.53	13700	3.17		
3800	1.47	8800	2.55	13800	3.18		
3900	1.49	8900	2.56	13900	3.22		
4000	1.52	9000	2.57	14000	3.26		
4100	1.55	9100	2.58	14100	3.28		
4200	1.56	9200	2.59	14200	3.30		
4300	1.58	9300	2.59	14300	3.35		
4400	1.60	9400	2.60	14400	3.39		
4500	1.63	9500	2.60	14500	3.39		
4600	1.65	9600	2.61	14600	3.39		
4700	1.67	9700	2.61	14700	3.41		



HERMON LABORATORIES

Cable loss**Test cable, Mini-Circuits, S/N 0755A, 18 GHz, 4.6 m, N/M - N/M
APC-15FT-NMNM+, HL 4278**

Frequency, MHz	Cable loss, dB						
10	0.24	4900	4.19	10000	6.47	15100	8.33
30	0.26	5000	4.25	10100	6.50	15200	8.35
50	0.34	5100	4.29	10200	6.52	15300	8.37
100	0.50	5200	4.32	10300	6.57	15400	8.40
200	0.72	5300	4.38	10400	6.59	15500	8.42
300	0.90	5400	4.41	10500	6.61	15600	8.46
400	1.06	5500	4.46	10600	6.64	15700	8.50
500	1.20	5600	4.51	10700	6.64	15800	8.52
600	1.32	5700	4.56	10800	6.65	15900	8.56
700	1.44	5800	4.59	10900	6.68	16000	8.61
800	1.54	5900	4.64	11000	6.68	16100	8.64
900	1.64	6000	4.69	11100	6.69	16200	8.66
1000	1.74	6100	4.72	11200	6.70	16300	8.70
1100	1.83	6200	4.77	11300	6.74	16400	8.73
1200	1.92	6300	4.80	11400	6.78	16500	8.74
1300	2.01	6400	4.83	11500	6.81	16600	8.75
1400	2.09	6500	4.89	11600	6.84	16700	8.78
1500	2.18	6600	4.90	11700	6.87	16800	8.79
1600	2.25	6700	4.95	11800	6.92	16900	8.81
1700	2.33	6800	5.01	11900	6.98	17000	8.85
1800	2.39	6900	4.99	12000	7.02	17100	8.90
1900	2.47	7000	5.04	12100	7.08	17200	8.95
2000	2.53	7100	5.11	12200	7.15	17300	8.99
2100	2.60	7200	5.14	12300	7.20	17400	9.03
2200	2.67	7300	5.21	12400	7.26	17500	9.07
2300	2.73	7400	5.29	12500	7.31	17600	9.11
2400	2.80	7500	5.33	12600	7.36	17700	9.15
2500	2.87	7600	5.38	12700	7.41	17800	9.19
2600	2.93	7700	5.46	12800	7.46	17900	9.24
2700	3.00	7800	5.52	12900	7.51	18000	9.28
2800	3.06	7900	5.58	13000	7.55		
2900	3.12	8000	5.64	13100	7.59		
3000	3.18	8100	5.69	13200	7.65		
3100	3.24	8200	5.75	13300	7.69		
3200	3.30	8300	5.80	13400	7.72		
3300	3.35	8400	5.84	13500	7.78		
3400	3.42	8500	5.90	13600	7.82		
3500	3.46	8600	5.97	13700	7.86		
3600	3.52	8700	5.99	13800	7.91		
3700	3.57	8800	6.04	13900	7.96		
3800	3.61	8900	6.10	14000	8.01		
3900	3.67	9000	6.13	14100	8.06		
4000	3.71	9100	6.17	14200	8.10		
4100	3.77	9200	6.23	14300	8.13		
4200	3.83	9300	6.27	14400	8.16		
4300	3.89	9400	6.30	14500	8.19		
4400	3.94	9500	6.35	14600	8.21		
4500	4.00	9600	6.37	14700	8.23		
4600	4.05	9700	6.40	14800	8.26		
4700	4.10	9800	6.44	14900	8.28		
4800	4.16	9900	6.45	15000	8.30		



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF TEST REPORT



HERMON LABORATORIES

Report ID: ESSRAD_FCC.25193_15.231.docx

Date of Issue: 29-Dec-13

15 APPENDIX G Manufacturer's declaration



Essence Security International

Declaration about periodic operation

We	Essence Security International Ltd
Name:	Igal Zertser
Address:	12 Abba Eban Avenue, Ackerstein Towers Bldg. D, P.O. Box 2073
City:	Herzliya 46120
Country:	Israel.....

The ES700TR5 is compliant with periodic operation requirements, listed below:

1. The TR5 device does not allow continuous transmitting (such as voice, video and RC).
2. The TR5 is not manually operated. Its transmission pattern include up to six re-tries (in case of no response). The patterns of these re-tries are built as follows:
 - a. Up to 8 mSec transmission period
 - b. Minimum of 100 mSec reception period (break/polling)
3. These transmissions occur upon intrusion only – none periodical in concept.
Therefore no manual activation/deactivation mechanism necessary.
4. Since there is no periodical behavior except supervision transmissions (the TR5 is an intrusion alarm system sensor device), there are no predetermined intervals of any kind included in its algorithms.

Name: Igal Zertser
Function: RF Engineering TL

Signature:

END OF DOCUMENT