



# MEASUREMENT REPORT

## C2PC

### FCC PART 22,24,27

---

**FCC ID:** YY3-14249-RF2

**APPLICANT:** HANDHELD GROUP AB

**Application Type:** Certification

**Product:** Nautiz X9

**Model No.:** 14249-RF2-N

**Trade Mark:** **handheld**

**FCC Classification:** (PCE) PCS Licensed Transmitter held to ear

**FCC Rule Part(s):** Part 22H,Part 24E,Part 27

**Test Procedure(s):** TIA 603-E 2016, KDB 971168 D01v02r02

**Test Date:** January 24 ~ 30, 2018

Tested By : *Fran Chen*  
( Fran Chen )

Reviewed By : *Paddy Chen*  
( Paddy Chen )

Approved By : *Chenz Ker*  
( Chenz Ker )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
1801TW1903-U8	1.0	Original Report	2018-02-06	

Note:

(1) This report is C2PC. The reason for variation is to remove the barcode scanner, other hardware is unchanged.

(2) The verification of this report is according to the worse case for Radiated spurious emission from the original report (Report No.: 1801TW1902-U8, Grant date: 2018/03/28).

# CONTENTS

Description	Page
<b>§2.1033 General Information .....</b>	<b>5</b>
<b>1. INTRODUCTION .....</b>	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION .....</b>	<b>7</b>
2.1. Feature of Equipment under Test.....	7
2.2. Antenna Description .....	7
2.3. Test Configuration.....	8
2.4. EMI Suppression Device(s)/Modifications.....	8
<b>3. DESCRIPTION OF TEST .....</b>	<b>9</b>
3.1. Evaluation Procedure .....	9
3.2. Occupied Bandwidth.....	9
3.3. Spurious and Harmonic Emissions at Antenna Terminal .....	9
3.4. Power and Radiated Spurious Emissions .....	10
3.5. Peak-Average Ratio .....	11
3.6. Frequency Stability / Temperature Variation .....	11
<b>4. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>12</b>
<b>5. SAMPLE CALCULATIONS.....</b>	<b>13</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>14</b>
<b>7. TEST RESULT .....</b>	<b>15</b>
7.1. Summary.....	15
7.2. Occupied Bandwidth.....	17
7.2.1. Test Limit .....	17
7.2.2. Test Procedure used.....	17
7.2.3. Test Setting.....	17
7.2.4. Test Setup .....	17
7.2.5. Test Result.....	18
7.3. Conducted Spurious Emissions .....	19
7.3.1. Test Limit .....	19
7.3.2. Test Procedure Used .....	19
7.3.3. Test Setting.....	19
7.3.4. Test Setup .....	19
7.3.5. Test Result.....	20

---

7.4.	Band Edge at Antenna Terminal.....	21
7.4.1.	Test Limit .....	21
7.4.2.	Test Procedure Used .....	21
7.4.3.	Test Setting.....	21
7.4.4.	Test Setup .....	22
7.4.5.	Test Result.....	23
7.5.	Power and Radiated Spurious Emissions .....	24
7.5.1	Test Limit .....	24
7.5.2	Test Procedure Used .....	24
7.5.3	Test Setting.....	25
7.5.4	Test Setup .....	26
7.5.5	Test Result.....	28
7.6.	Peak-Average Ratio .....	44
7.6.1	Test Limit .....	44
7.6.2	Test Procedure .....	44
7.6.3	Test Setup .....	44
7.6.4	Test Result.....	45
7.7.	Frequency Stability Under Temperature & Voltage Variations .....	46
7.7.1	Test Limit .....	46
7.7.2	Test Procedure .....	46
7.7.3	Test Setup .....	46
7.7.4	Test Result.....	47

## §2.1033 General Information

<b>Applicant</b>	HANDHELD GROUP AB
<b>Applicant Address</b>	Kinnegatan 17 A ,531 33 Lidköping, Sweden
<b>Manufacturer</b>	HANDHELD GROUP AB
<b>Manufacturer Address</b>	Kinnegatan 17 A ,531 33 Lidköping, Sweden
<b>Test Site</b>	MRT Technology (Taiwan) Co., Ltd
<b>Test Site Address</b>	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
<b>MRT FCC Registration No.</b>	291082
<b>FCC Rule Part(s)</b>	Part 22H,Part 24E,Part 27
<b>Test Device Serial No.</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

### Test Facility / Accreditations

1. MRT facility is a FCC registered ( Reg. No. 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
2. MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

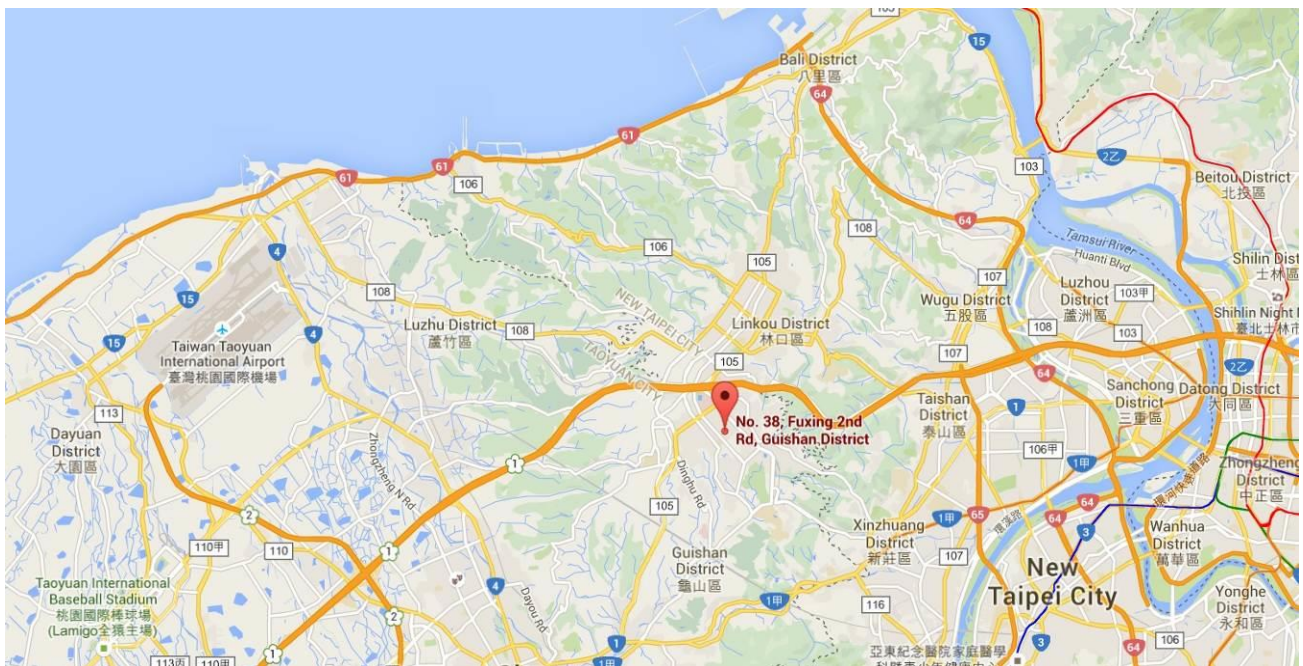

## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

Product Name	Nautiz X9
Model No.	14249-RF2-N
Trade Mark	<b>handheld</b>
Supports Radios Spec.	WWAN : GSM/GPRS/EGPRS/WCDMA/HSPA/CDMA/EVDO/LTE WLAN : 2.4G : 802.11b/g/n-20/n-40; 5G : 802.11a/n-20/n-40 WPAN : Bluetooth/NFC
WWAN Specification	2G(GSM/GPRS/EDGE): 850/1900 3G(WCDMA): Band 2/5 3G(CDMA2000):BC0/BC1 4G(FDD/TDD): Band 2/4/5/7/12/13/17
Frequency Range	LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz LTE Band 5: 824~849MHz LTE Band 7: 2500~2570MHz LTE Band 12: 699~716MHz LTE Band 13: 777~787MHz LTE Band 17: 704~716MHz

Note: The test mode of worst case is LTE Band 2

### 2.2. Antenna Description

Antenna Type	FPC
Antenna M/N	AP316-LTE-MAIN_V1
Antenna Gain	LTE Band 2: 1850~1910MHz : 3.31dBi LTE Band 4: 1710~1755MHz : -7.78dBi LTE Band 5: 824~849MHz : -3.94dBi LTE Band 7: 2500~2570MHz : 0.93dBi LTE Band 12: 699~716MHz : -3.26dBi LTE Band 13: 777~787MHz : -3.94dBi LTE Band 17: 704~716MHz : -3.26dBi
Type of Modulation	QPSK/16QAM

Note: The test report has showed the worst test mode.

### **2.3. Test Configuration**

The **Nautiz X9** was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01v02r02. See section 7.0 of this report for a description of the radiated and antenna port conducted emissions tests.

### **2.4. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and no modifications were made during testing.



### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **Nautiz X9**

**Deviation from measurement procedure.....None**

#### 3.2. Occupied Bandwidth

##### §2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The spectrum analyzers’ “occupied bandwidth” measurement function was used to record the occupied bandwidth in accordance with KDB 971168.

#### 3.3. Spurious and Harmonic Emissions at Antenna Terminal

##### §2.1051 §22.917(a) §24.238(a) §27.53(c)(h)(m)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### 3.4. Power and Radiated Spurious Emissions

#### §2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(b)(d)(h) §27.53(c)(h)(m)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurement and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 80cm high PVC support structure is placed on top of the turntable.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13/-25dBm which is equivalent to the required minimum attenuation of  $43 + 10 \cdot \log_{10}(\text{Power [Watts]}) / 55 + 10 \cdot \log_{10}(\text{Power [Watts]})$  specified in 22.917(a)/27.53(m).

### 3.5. Peak-Average Ratio

#### §24.232(d) §27.50(B)

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

For pulsed signals, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power. For continuous signals, the trigger is set to “free run” in the CCDF measurement mode.

### 3.6. Frequency Stability / Temperature Variation

#### §2.1055 §22.355 §22.863 §22.905 §24.235 §27.54

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from End point to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### 4. TEST EQUIPMENT CALIBRATION DATE

##### Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2018.03.15
Cable	Rosnol	N1C50-RG400- B1C50-500CM	MRTTWE00013	1 year	2018.05.19
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2018.03.16

##### Radiated Emissions – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2018.05.14
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2018.03.16
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2018.04.13
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2018.04.17
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2018.04.24
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2018.04.24
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2018.04.19
Wideband Radio Communication Taster	R&S	CMW 500	MRTTWA00041	1 year	2018/12/13
Cable	HUBERSUHNER	SF106	MRTTWA00010	1 year	2018.05.19
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWA00012	1 year	2018.05.19

##### Conducted Test Equipment – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2018.07.24
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2018.03.19
Wideband Radio Communication Taster	R&S	CMW 500	MRTTWA00041	1 year	2018/12/13

##### Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V3	EMI Test Software

## 5. SAMPLE CALCULATIONS

### **GSM Emission Designator**

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### **EGPRS Emission Designator**

Emission Designator = 250KG7W

GSM BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

### **WCDMA / CDMA Emission Designator**

Emission Designator = 1M25F9W

WCDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

### **LTE Emission Designator**

Emission Designator = QPSK 5M00G7D / 16QAM 5M00W7D

LTE BW = 1.4/3/5/10/15/20 MHz

QPSK G = Phase Modulation /

16QAM W= in a combination of two or more of the following modes: amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### **Spurious Radiated Emission**

Example: Spurious emission at 1688.10 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-65.0\text{dBm}$ . The gain of the substituted antenna is  $6.5\text{dBi}$ . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-65.0\text{dBm}$  on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $4.5\text{ dB}$  at  $1688.1\text{MHz}$ . So  $2\text{ dB}$  is added to the signal generator reading of  $-25\text{dBm}$  yielding  $-23\text{dBm}$ . The fundamental EIRP was  $24.0\text{dBm}$  so this harmonic was  $24.0\text{dBm} - (-23) = 47\text{dBc}$ .

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

AC Conducted Emission Measurement – SR2
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: 2.42dB
Conducted Measurement– SR1
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.3dB
Radiated Emission Measurement – AC1
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 4.22dB

## 7. TEST RESULT

### 7.1. Summary

**Company Name:** Nautiz X9  
**FCC Classification:** (PCE) PCS Licensed Transmitter held to ear

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b><u>Transmitter Mode(TX)</u></b>					
2.1049	Occupied bandwidth	N/A	Conducted	N/A	Original Report No.:1801TW1902-U8
2.1051 22.917(a) 24.238(a) 27.53(c) 27.52(h)	Conducted Spurious Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) at for all out-of-band emissions (Band 2,4,5,12,13,17)		N/A	Original Report No.:1801TW1902-U8
2.1051 27.53(m)		> 55 + 10log <sub>10</sub> (P[Watts]) at for all out-of-band emissions (Band 7)			
2.1051 22.917(a) 24.238(a) 27.53(c) 27.52(h)	Band Edge	> 43 + 10log <sub>10</sub> (P[Watts]) at for all out-of-band emissions		N/A	Original Report No.:1801TW1902-U8
27.53(m)		27.53(m)(4)			
2.1046	Conducted Output Power	N/A			Pass
22.913(a)	Radiated Output Power	< 7 Watts max. ERP (Band 5)	Radiated	Pass	Section 7.5
24.232(c) 27.50(h)		< 2 Watts max. EIRP (Band 2, 7)		Pass	
27.50(b)		< 3 Watts max. ERP (Band 12,13)		Pass	
27.50(d)		< 1 Watts max. EIRP (Band 4)		Pass	

2.1053 22.917(a) 24.238(a) 27.53(c) 27.53(h)	Radiated Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions (Band 2,4,5,12,13,17)	Radiated	Pass	Section 7.5
2.1053 27.53(m)		> 55 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions (Band 7)			
24.232(d) 27.50(B)	Peak-Average Ratio	<13dB	Conducted	N/A	Original Report No.:1801TW1902-U8
2.1055 22.355	Frequency Stability	< 2.5 ppm		N/A	Original Report No.:1801TW1902-U8
2.1055 24.235 27.54		Within Authorized Band			

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.



## 7.2. Occupied Bandwidth

### 7.2.1. Test Limit

N/A


### 7.2.2. Test Procedure used

KDB 971168 D01v02r02 – Section 4.2 & ANSI/TIA-603-D-2010

### 7.2.3. Test Setting

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
2. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW. (RBW = approximately 1% of the emission bandwidth).
3. Set the detection mode to peak, and the trace mode to max hold.
4. Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.

### 7.2.4. Test Setup

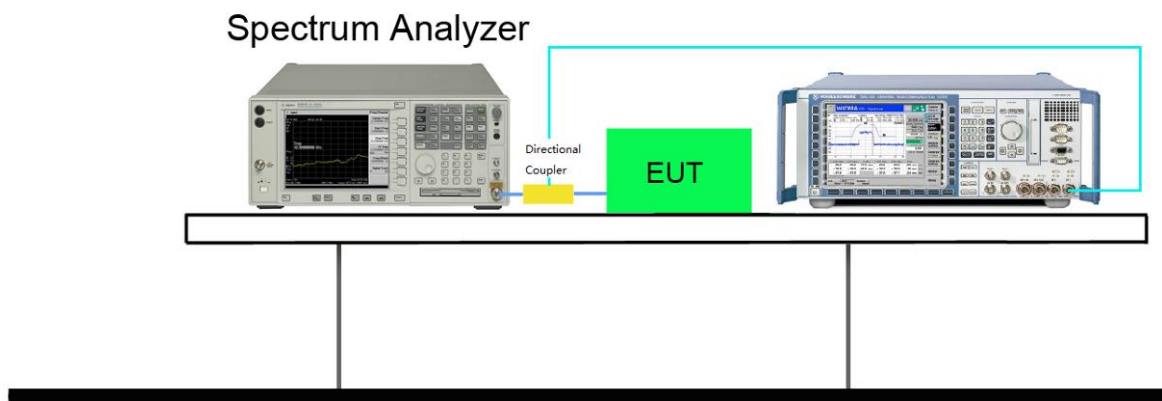

### 7.2.5. Test Result

Refer to the original report No.: 1801TW1902-U8.

### 7.3. Conducted Spurious Emissions

#### 7.3.1. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log_{10}(P)$  dB for Band 2,4,5,12,13,17/  $55 + 10\log_{10}(P)$  dB for Band7.


#### 7.3.2. Test Procedure Used

KDB 971168 D01v02r02 – Section 6.0 & ANSI/TIA-603-D-2010

#### 7.3.3. Test Setting

Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz is at or below 1GHz and 1MHz is above 1GHz, If any, up to 10<sup>th</sup> harmonic.

#### 7.3.4. Test Setup

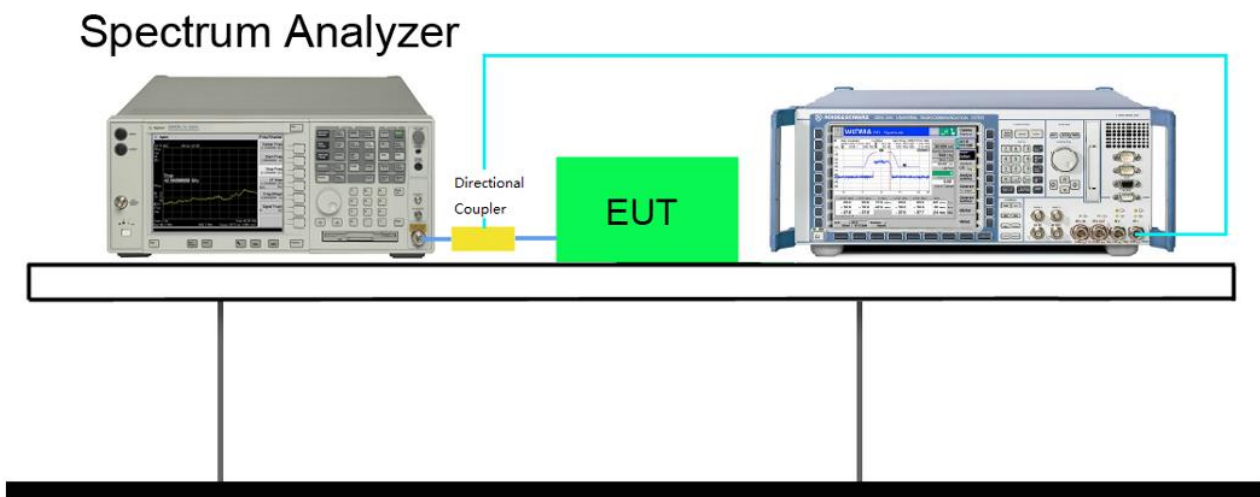

### 7.3.5. Test Result

Refer to the original report No.: 1801TW1902-U8.

## **7.4. Band Edge at Antenna Terminal**

### **7.4.1. Test Limit**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB for Band 2,4,5,12,13,17/ the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz for Band7.


### **7.4.2. Test Procedure Used**

KDB 971168 D01v02r02 – Section 6.0 & ANSI/TIA-603-D-2010

### **7.4.3. Test Setting**

In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 7.4.4. Test Setup

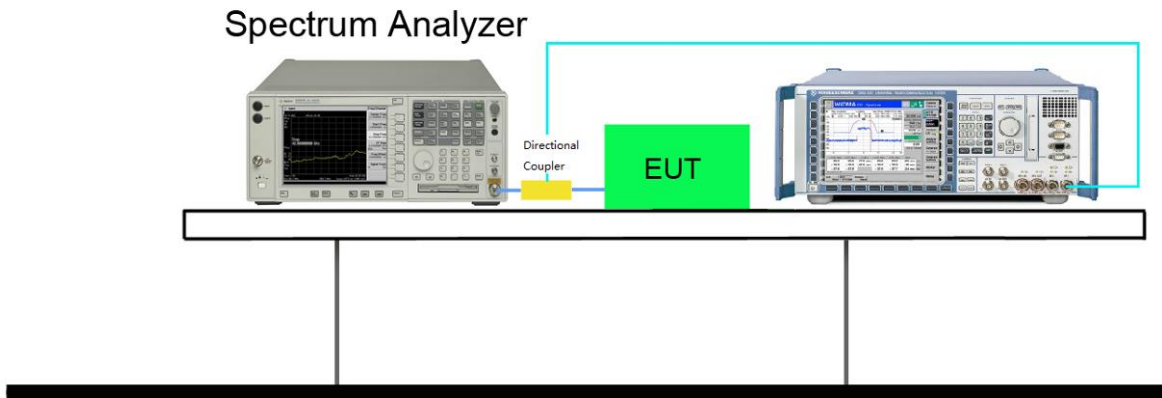

#### **7.4.5. Test Result**

Refer to the original report No.: 1801TW1902-U8.

## 7.5. Power and Radiated Spurious Emissions

### 7.5.1 Test Limit

#### **Radiated Power**

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(c)/27.50(h):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

For FCC Part 27.50(b):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 3 Watts.

For FCC Part 27.50(d):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 1 Watts.

#### **Radiated Spurious Emissions**

For FCC Part 22.917(a)/24.238(a)/27.53(c)/27.53(f)/27.53(h):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log_{10}(P)$  dB.

For FCC Part 27.53(m):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $55 + 10\log_{10}(P)$  dB.

### 7.5.2 Test Procedure Used

KDB 971168 D01v02r02 - Section 7.0 & ANSI/TIA-603-D-2010



### 7.5.3 Test Setting


1. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
3. The output of the test antenna shall be connected to the measuring receiver.
4. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a substitution antenna.
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator

setting of the measuring receiver.

15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
16. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
17. Test site anechoic chamber refer to ANSI C63.4: 2014.


#### 7.5.4 Test Setup

##### Conducted Power

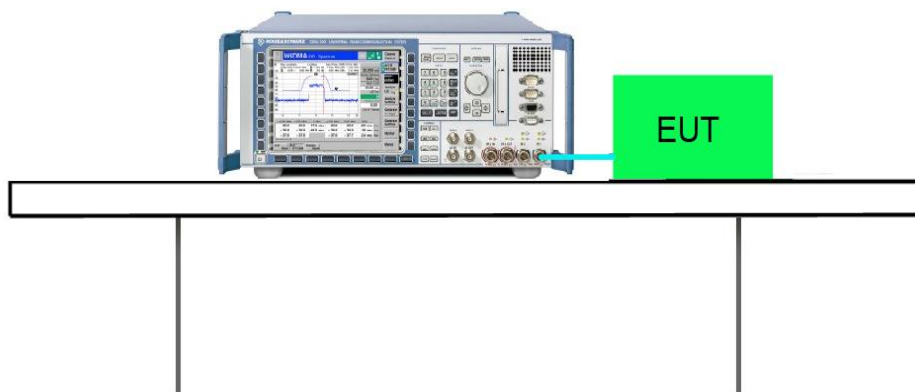


## Radiated Power & Radiated Spurious Emissions

### 30MHz ~ 1GHz Test Setup:

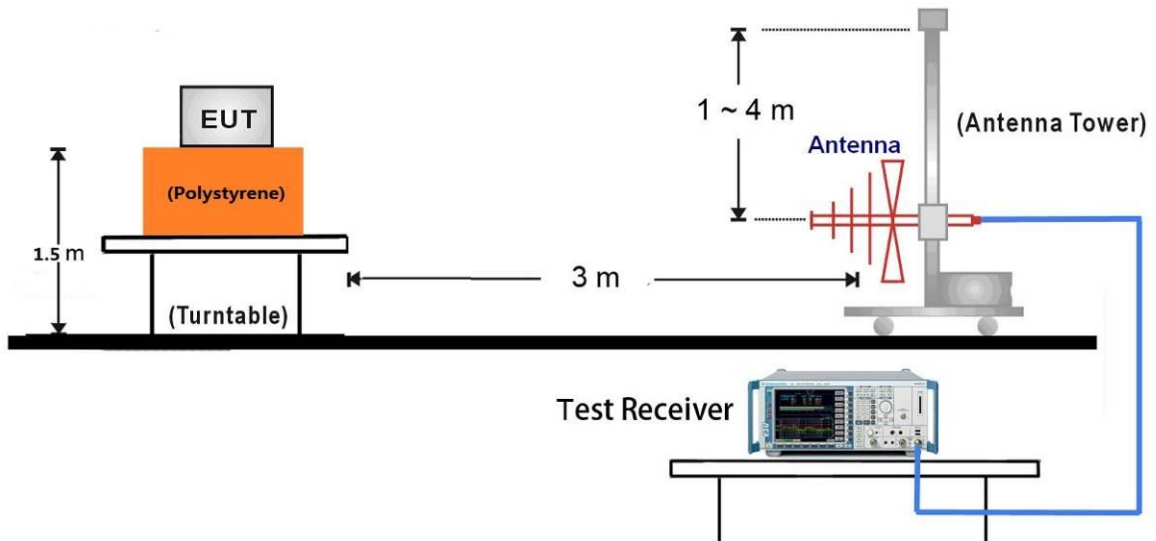

### 1GHz ~ 10GHz Test Setup:

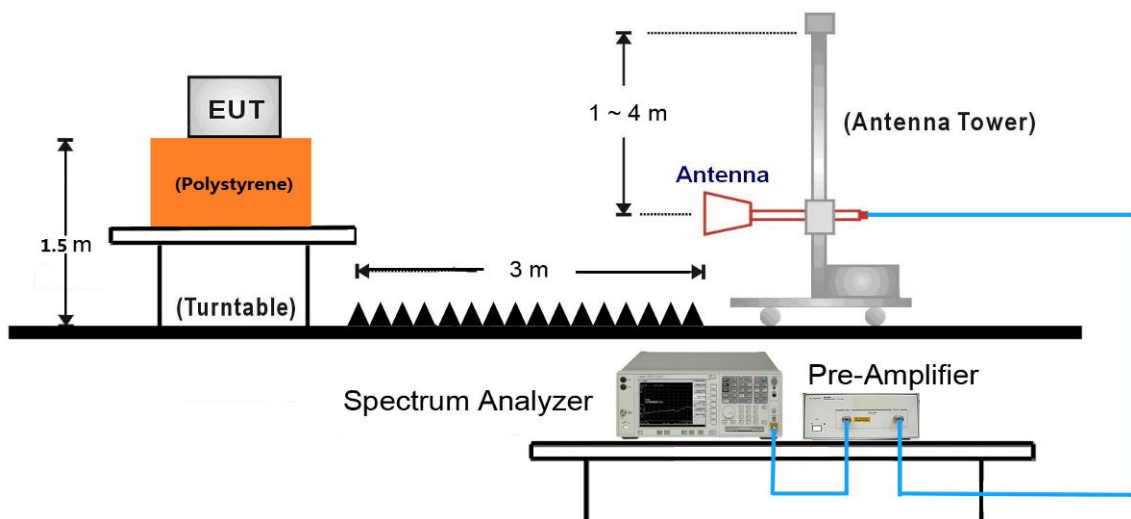

**7.5.5 Test Result**
**Conducted Power**

Band 2		1.4M			3M			5M			10M			15M			20M			MPR
Channel	Modulation	RB	RB	Max	RB	RB	Max	RB	RB	Max	RB	RB	Max	RB	RB	Max	RB	RB	Max	
		No.	Offset	Power	No.	Offset	Power	No.	Offset	Power	No.	Offset	Power	No.	Offset	Power	No.	Offset	Power	
		18607 (1850.7MHz)			18615 (1851.5MHz)			18625 (1852.5MHz)			18650 (1855MHz)			18675 (1857.5MHz)			18700 (1860MHz)			
Low	QPSK	1	#0	22.78	1	#0	22.57	1	#0	22.69	1	#0	22.64	1	#0	23.05	1	#0	23.16	0
		1	#2	22.66	1	#7	22.62	1	#12	22.55	1	#25	22.59	1	#36	22.72	1	#49	22.64	0
		1	#5	22.74	1	#14	22.56	1	#24	22.72	1	#49	22.28	1	#74	22.63	1	#99	23.05	0
		3	#0	22.81	8	#0	21.68	12	#0	21.78	25	#0	21.95	36	#0	22.06	50	#0	22.07	0-1
		3	#2	22.69	8	#4	21.73	12	#6	21.66	25	#12	21.84	36	#18	21.89	50	#24	21.95	0-1
		3	#3	22.66	8	#7	21.79	12	#13	21.74	25	#25	21.88	36	#37	21.85	50	#49	21.91	0-1
		6	#0	22.01	15	#0	21.69	25	#0	21.68	50	#0	21.81	75	#0	21.88	100	#0	22.08	0-1
	16QAM	1	#0	21.95	1	#0	21.58	1	#0	21.88	1	#0	21.93	1	#0	22.07	1	#0	22.03	0-1
		1	#2	22.02	1	#7	21.87	1	#12	21.75	1	#25	22.05	1	#36	21.96	1	#49	21.77	0-1
		1	#5	22.98	1	#14	21.79	1	#24	22.16	1	#49	21.45	1	#74	21.77	1	#99	22.27	0-1
		3	#0	22.00	8	#0	20.77	12	#0	20.94	25	#0	20.78	36	#0	20.85	50	#0	21.05	0-2
		3	#2	21.92	8	#4	20.72	12	#6	20.67	25	#12	20.81	36	#18	20.79	50	#24	20.76	0-2
		3	#3	21.95	8	#7	20.66	12	#13	20.83	25	#25	20.75	36	#37	20.71	50	#49	20.84	0-2
		6	#0	21.05	15	#0	20.58	25	#0	20.84	50	#0	20.79	75	#0	20.65	100	#0	20.98	0-2
Mid	QPSK	18900 (1880MHz)			18900 (1880MHz)			18900 (1880MHz)			18900 (1880MHz)			18900 (1880MHz)			18900 (1880MHz)			MPR
		1	#0	23.04	1	#0	22.79	1	#0	23.11	1	#0	22.74	1	#0	23.15	1	#0	23.08	0
		1	#2	23.16	1	#7	22.95	1	#12	22.95	1	#25	23.07	1	#36	23.22	1	#49	23.41	0
		1	#5	23.09	1	#14	22.89	1	#24	23.09	1	#49	22.68	1	#74	23.01	1	#99	22.86	0
		3	#0	23.18	8	#0	22.03	12	#0	22.16	25	#0	22.16	36	#0	22.19	50	#0	22.31	0-1
		3	#2	23.14	8	#4	22.01	12	#6	22.19	25	#12	22.28	36	#18	22.22	50	#24	22.29	0-1
		3	#3	23.20	8	#7	22.08	12	#13	22.15	25	#25	22.21	36	#37	22.34	50	#49	22.35	0-1
	6	#0	22.21	15	#0	22.00	25	#0	22.08	50	#0	22.19	75	#0	22.19	100	#0	22.31	0-1	
	16QAM	1	#0	22.08	1	#0	21.78	1	#0	22.15	1	#0	21.58	1	#0	22.26	1	#0	22.27	0-1
		1	#2	22.26	1	#7	21.68	1	#12	22.07	1	#25	21.88	1	#36	22.19	1	#49	22.34	0-1
		1	#5	22.08	1	#14	22.11	1	#24	22.18	1	#49	21.47	1	#74	22.06	1	#99	21.98	0-1
		3	#0	22.12	8	#0	20.97	12	#0	21.24	25	#0	21.15	36	#0	21.15	50	#0	21.18	0-2
		3	#2	21.99	8	#4	21.11	12	#6	21.20	25	#12	21.19	36	#18	21.28	50	#24	21.26	0-2
		3	#3	22.05	8	#7	21.09	12	#13	21.22	25	#25	21.21	36	#37	21.21	50	#49	21.19	0-2
6		#0	21.28	15	#0	21.12	25	#0	21.18	50	#0	21.27	75	#0	21.11	100	#0	21.22	0-2	

		19193 (1909.3MHz)			19185 (1908.5MHz)			19175 (1907.5MHz)			19150 (1905MHz)			19125 (1902.5MHz)			19100 (1900MHz)			MPR
		1	#		1	#		1	#		1	#		1	#		1	#		
High	QPSK	1	#0	23.18	1	#0	22.92	1	#0	23.29	1	#0	22.88	1	#0	22.89	1	#0	23.01	0
		1	#2	23.11	1	#7	23.01	1	#12	22.87	1	#25	23.11	1	#36	23.18	1	#49	23.18	0
		1	#5	23.27	1	#14	22.94	1	#24	23.27	1	#49	22.95	1	#74	23.26	1	#99	23.32	0
		3	#0	23.28	8	#0	22.17	12	#0	22.17	25	#0	22.18	36	#0	22.17	50	#0	22.06	0-1
		3	#2	23.19	8	#4	22.21	12	#6	22.15	25	#12	22.32	36	#18	22.32	50	#24	22.28	0-1
		3	#3	23.06	8	#7	22.29	12	#13	22.28	25	#25	22.28	36	#37	22.41	50	#49	22.31	0-1
		6	#0	22.38	15	#0	22.18	25	#0	22.20	50	#0	22.19	75	#0	22.25	100	#0	22.22	0-1
	16QAM	1	#0	22.31	1	#0	22.28	1	#0	22.38	1	#0	21.95	1	#0	22.0	1	#0	22.05	0-1
		1	#2	22.29	1	#7	22.25	1	#12	22.26	1	#25	22.32	1	#36	22.19	1	#49	22.44	0-1
		1	#5	22.17	1	#14	22.33	1	#24	22.31	1	#49	21.68	1	#74	22.42	1	#99	22.26	0-1
		3	#0	22.36	8	#0	21.29	12	#0	21.29	25	#0	21.33	36	#0	21.11	50	#0	21.05	0-2
		3	#2	22.18	8	#4	21.36	12	#6	21.17	25	#12	21.42	36	#18	21.29	50	#24	21.19	0-2
		3	#3	22.25	8	#7	21.35	12	#13	21.05	25	#25	21.24	36	#37	21.43	50	#49	21.35	0-2
6	#0	21.29	15	#0	21.22	25	#0	21.14	50	#0	21.27	75	#0	21.19	100	#0	21.23	0-2		



Band 4		1.4M			3M			5M			10M			15M			20M			MPR
Channel	Modulation	RB	RB	Max	RB	RB	Max	RB	RB	Max	RB	RB	Max	RB	RB	Max	RB	RB	Max	
		No.	Offset	Power	No.	Offset	Power	No.	Offset	Power	No.	Offset	Power	No.	Offset	Power	No.	Offset	Power	
Low	QPSK	19957 (1710.7MHz)			19965 (1711.5MHz)			19975 (1712.5MHz)			20000 (1715MHz)			20025 (1717.5MHz)			20050 (1720MHz)			
		1	#0	23.45	1	#0	23.35	1	#0	23.55	1	#0	23.55	1	#0	23.64	1	#0	23.66	0
		1	#2	23.57	1	#7	23.59	1	#12	23.63	1	#25	23.73	1	#36	23.75	1	#49	23.73	0
		1	#5	23.44	1	#14	23.44	1	#24	23.58	1	#49	23.62	1	#74	23.66	1	#99	23.67	0
		3	#0	23.62	8	#0	22.56	12	#0	22.52	25	#0	22.72	36	#0	22.77	50	#0	22.78	0-1
		3	#2	23.51	8	#4	22.42	12	#6	22.44	25	#12	22.66	36	#18	22.72	50	#24	22.75	0-1
		3	#3	23.58	8	#7	22.63	12	#13	22.62	25	#25	22.71	36	#37	22.83	50	#49	22.84	0-1
	6	#0	22.61	15	#0	22.59	25	#0	22.38	50	#0	22.59	75	#0	22.69	100	#0	22.75	0-1	
	16QAM	1	#0	22.59	1	#0	23.04	1	#0	23.01	1	#0	22.63	1	#0	23.17	1	#0	23.17	0-1
		1	#2	22.87	1	#7	22.67	1	#12	22.61	1	#25	22.96	1	#36	22.83	1	#49	22.66	0-1
		1	#5	22.64	1	#14	22.88	1	#24	22.72	1	#49	22.84	1	#74	23.18	1	#99	23.01	0-1
		3	#0	22.61	8	#0	21.77	12	#0	21.69	25	#0	21.67	36	#0	21.73	50	#0	21.78	0-2
		3	#2	22.59	8	#4	21.69	12	#6	21.72	25	#12	21.77	36	#18	21.82	50	#24	21.66	0-2
		3	#3	22.63	8	#7	21.72	12	#13	21.67	25	#25	21.69	36	#37	21.95	50	#49	21.58	0-2
6		#0	21.59	15	#0	21.64	25	#0	21.58	50	#0	21.74	75	#0	21.74	100	#0	21.77	0-2	
Mid	QPSK	20175 (1732.5MHz)			20175 (1732.5MHz)			20175 (1732.5MHz)			20175 (1732.5MHz)			20175 (1732.5MHz)			20175 (1732.5MHz)			MPR
		1	#0	23.57	1	#0	23.58	1	#0	23.68	1	#0	23.74	1	#0	23.74	1	#0	23.68	0
		1	#2	23.74	1	#7	23.77	1	#12	23.87	1	#25	23.81	1	#36	23.68	1	#49	23.77	0
		1	#5	23.68	1	#14	23.64	1	#24	23.56	1	#49	23.44	1	#74	23.81	1	#99	23.68	0
		3	#0	23.79	8	#0	22.88	12	#0	22.84	25	#0	22.85	36	#0	22.76	50	#0	22.88	0-1
		3	#2	23.88	8	#4	22.77	12	#6	22.78	25	#12	22.77	36	#18	22.71	50	#24	22.79	0-1
		3	#3	23.74	8	#7	22.89	12	#13	22.85	25	#25	22.85	36	#37	22.83	50	#49	22.85	0-1
	6	#0	22.77	15	#0	22.76	25	#0	22.73	50	#0	22.68	75	#0	22.79	100	#0	22.78	0-1	
	16QAM	1	#0	23.18	1	#0	22.57	1	#0	22.67	1	#0	22.71	1	#0	22.77	1	#0	23.03	0-1
		1	#2	23.01	1	#7	23.13	1	#12	23.21	1	#25	22.58	1	#36	22.97	1	#49	22.95	0-1
		1	#5	23.15	1	#14	22.74	1	#24	22.58	1	#49	23.21	1	#74	23.01	1	#99	22.89	0-1
		3	#0	22.76	8	#0	21.79	12	#0	21.95	25	#0	21.77	36	#0	21.79	50	#0	21.95	0-2
		3	#2	22.57	8	#4	21.89	12	#6	21.88	25	#12	21.65	36	#18	21.88	50	#24	21.89	0-2
		3	#3	22.69	8	#7	21.77	12	#13	21.76	25	#25	21.83	36	#37	21.95	50	#49	21.88	0-2
6		#0	21.84	15	#0	21.89	25	#0	21.86	50	#0	21.93	75	#0	21.87	100	#0	21.92	0-2	

		20393 (1754.3MHz)			20385 (1753.5MHz)			20375 (1752.5MHz)			20350 (1750MHz)			20325 (1747.5MHz)			20300 (1745MHz)			MPR
		1	#		1	#		1	#		1	#		1	#		1	#		
High	QPSK	1	#0	23.58	1	#0	23.53	1	#0	23.55	1	#0	23.67	1	#0	23.72	1	#0	23.72	0
		1	#2	23.64	1	#7	23.62	1	#12	23.64	1	#25	23.79	1	#36	23.77	1	#49	23.75	0
		1	#5	23.58	1	#14	23.57	1	#24	23.52	1	#49	23.55	1	#74	23.56	1	#99	23.67	0
		3	#0	23.68	8	#0	22.77	12	#0	22.79	25	#0	22.79	36	#0	22.79	50	#0	22.88	0-1
		3	#2	23.72	8	#4	22.68	12	#6	22.67	25	#12	22.68	36	#18	22.88	50	#24	22.79	0-1
		3	#3	23.65	8	#7	22.72	12	#13	22.71	25	#25	22.71	36	#37	22.73	50	#49	22.71	0-1
		6	#0	22.74	15	#0	22.66	25	#0	22.67	50	#0	22.69	75	#0	22.69	100	#0	22.83	0-1
	16QAM	1	#0	23.02	1	#0	22.71	1	#0	22.96	1	#0	22.95	1	#0	22.94	1	#0	23.29	0-1
		1	#2	22.99	1	#7	22.79	1	#12	22.57	1	#25	22.56	1	#36	23.00	1	#49	22.85	0-1
		1	#5	23.16	1	#14	22.64	1	#24	22.77	1	#49	22.54	1	#74	23.05	1	#99	22.64	0-1
		3	#0	22.58	8	#0	21.88	12	#0	21.75	25	#0	21.88	36	#0	21.84	50	#0	21.85	0-2
		3	#2	22.55	8	#4	21.63	12	#6	21.79	25	#12	21.79	36	#18	21.88	50	#24	21.82	0-2
		3	#3	22.49	8	#7	21.78	12	#13	21.83	25	#25	21.66	36	#37	21.79	50	#49	21.74	0-2
		6	#0	21.77	15	#0	21.65	25	#0	21.74	50	#0	21.82	75	#0	21.72	100	#0	21.63	0-2

Band 5		1.4M			3M			5M			10M			MPR
Channel	Modulation	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	
		20407 (824.7MHz)			20415 (825.5MHz)			20425 (826.5MHz)			20450 (829MHz)			
Low	QPSK	1	#0	22.10	1	#0	21.96	1	#0	22.06	1	#0	22.07	
		1	#2	22.12	1	#7	22.08	1	#12	22.05	1	#25	22.15	0
		1	#5	21.01	1	#14	21.92	1	#24	21.96	1	#49	22.12	0
		3	#0	22.05	8	#0	21.06	12	#0	21.17	25	#0	21.13	0-1
		3	#2	22.04	8	#4	21.11	12	#6	21.09	25	#12	21.01	0-1
		3	#3	22.11	8	#7	21.15	12	#13	21.11	25	#25	21.13	0-1
		6	#0	21.15	15	#0	21.04	25	#0	21.09	50	#0	21.14	0-1
	16QAM	1	#0	21.21	1	#0	21.15	1	#0	21.14	1	#0	21.11	0-1
		1	#2	21.05	1	#7	21.26	1	#12	20.89	1	#25	21.25	0-1
		1	#5	21.04	1	#14	21.19	1	#24	21.34	1	#49	21.09	0-1
		3	#0	21.13	8	#0	20.04	12	#0	20.15	25	#0	20.21	0-2
		3	#2	21.08	8	#4	20.23	12	#6	20.18	25	#12	20.10	0-2
		3	#3	21.17	8	#7	20.02	12	#13	20.10	25	#25	20.12	0-2
		6	#0	20.22	15	#0	20.20	25	#0	20.07	50	#0	20.05	0-2
Mid	QPSK	20525 (836.5MHz)			20525 (836.5MHz)			20525 (836.5MHz)			20525 (836.5MHz)			MPR
		1	#0	22.07	1	#0	22.09	1	#0	22.15	1	#0	22.13	0
		1	#2	22.06	1	#7	22.06	1	#12	22.34	1	#25	22.16	0
		1	#5	22.04	1	#14	21.95	1	#24	22.13	1	#49	22.04	0
		3	#0	22.35	8	#0	21.06	12	#0	21.23	25	#0	21.11	0-1
		3	#2	22.02	8	#4	21.15	12	#6	21.20	25	#12	21.17	0-1
		3	#3	22.17	8	#7	21.17	12	#13	21.01	25	#25	21.20	0-1
	6	#0	21.09	15	#0	21.15	25	#0	21.18	50	#0	21.22	0-1	
	16QAM	1	#0	21.32	1	#0	21.27	1	#0	21.22	1	#0	21.30	0-1
		1	#2	21.13	1	#7	21.06	1	#12	21.19	1	#25	21.24	0-1
		1	#5	21.08	1	#14	21.14	1	#24	21.24	1	#49	21.20	0-1
		3	#0	21.10	8	#0	20.24	12	#0	20.10	25	#0	20.27	0-2
		3	#2	21.29	8	#4	20.10	12	#6	20.24	25	#12	20.10	0-2
		3	#3	21.08	8	#7	20.16	12	#13	20.23	25	#25	20.15	0-2
6		#0	20.32	15	#0	20.12	25	#0	20.17	50	#0	20.16	0-2	



		20643 (848.3MHz)			20635 (847.5MHz)			20625 (846.5MHz)			20600 (844MHz)			MPR
High	QPSK	1	#0	21.95	1	#0	21.91	1	#0	22.06	1	#0	22.23	0
		1	#2	22.38	1	#7	21.89	1	#12	22.07	1	#25	22.16	0
		1	#5	21.90	1	#14	21.99	1	#24	22.03	1	#49	22.04	0
		3	#0	22.08	8	#0	21.13	12	#0	21.17	25	#0	21.06	0-1
		3	#2	22.01	8	#4	21.12	12	#6	21.16	25	#12	21.07	0-1
		3	#3	22.03	8	#7	21.01	12	#13	21.04	25	#25	21.14	0-1
		6	#0	21.06	15	#0	21.08	25	#0	21.01	50	#0	21.18	0-1
	16QAM	1	#0	20.93	1	#0	20.87	1	#0	21.07	1	#0	21.20	0-1
		1	#2	21.23	1	#7	21.23	1	#12	20.89	1	#25	21.19	0-1
		1	#5	21.10	1	#14	21.32	1	#24	21.08	1	#49	21.37	0-1
		3	#0	21.19	8	#0	20.13	12	#0	20.20	25	#0	20.06	0-2
		3	#2	20.67	8	#4	20.14	12	#6	20.12	25	#12	20.11	0-2
		3	#3	21.08	8	#7	20.18	12	#13	20.16	25	#25	20.10	0-2
		6	#0	19.55	15	#0	20.02	25	#0	20.01	50	#0	20.13	0-2

Band 7		5M			10M			15M			20M			MPR
Channel	Modulation	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	
		20775 (2502.5MHz)			20800 (2505MHz)			20825 (2507.5MHz)			20850 (2510MHz)			
Low	QPSK	1	#0	21.36	1	#0	21.48	1	#0	21.47	1	#0	21.40	0
		1	#12	21.40	1	#25	21.36	1	#36	21.38	1	#49	21.38	0
		1	#24	21.33	1	#49	21.40	1	#74	21.38	1	#99	21.47	0
		12	#0	20.50	25	#0	20.53	36	#0	20.55	50	#0	20.57	0-1
		12	#6	20.58	25	#12	20.51	36	#18	20.54	50	#24	20.40	0-1
		12	#13	20.56	25	#25	20.53	36	#37	20.53	50	#49	20.49	0-1
		25	#0	20.45	50	#0	20.44	75	#0	20.56	100	#0	20.51	0-1
	16QAM	1	#0	20.90	1	#0	20.39	1	#0	20.43	1	#0	20.88	0-1
		1	#12	20.03	1	#25	20.50	1	#36	20.52	1	#49	20.58	0-1
		1	#24	19.97	1	#49	20.51	1	#74	20.44	1	#99	20.55	0-1
		12	#0	19.52	25	#0	19.53	36	#0	19.60	50	#0	19.57	0-2
		12	#6	19.47	25	#12	19.45	36	#18	19.57	50	#24	19.45	0-2
		12	#13	19.54	25	#25	19.54	36	#37	19.55	50	#49	19.38	0-2
		25	#0	19.55	50	#0	19.46	75	#0	19.47	100	#0	19.54	0-2
Mid	QPSK	21100 (2535MHz)			21100 (2535MHz)			21100 (2535MHz)			21100 (2535MHz)			MPR
		1	#0	21.19	1	#0	21.29	1	#0	21.41	1	#0	21.51	0
		1	#12	21.25	1	#25	21.23	1	#36	21.29	1	#49	21.34	0
		1	#24	21.35	1	#49	21.20	1	#74	21.43	1	#99	21.33	0
		12	#0	20.44	25	#0	20.40	36	#0	20.44	50	#0	20.35	0-1
		12	#6	20.43	25	#12	20.34	36	#18	20.50	50	#24	20.41	0-1
		12	#13	20.37	25	#25	20.38	36	#37	20.31	50	#49	20.33	0-1
	25	#0	20.33	50	#0	20.31	75	#0	20.32	100	#0	20.42	0-1	
	16QAM	1	#0	20.71	1	#0	20.29	1	#0	20.30	1	#0	20.85	0-1
		1	#12	20.68	1	#25	20.70	1	#36	20.49	1	#49	20.45	0-1
		1	#24	20.18	1	#49	20.82	1	#74	20.73	1	#99	20.73	0-1
		12	#0	19.48	25	#0	19.31	36	#0	19.47	50	#0	19.44	0-2
		12	#6	19.38	25	#12	19.37	36	#18	19.50	50	#24	19.35	0-2
		12	#13	19.44	25	#25	19.40	36	#37	19.43	50	#49	19.50	0-2
25		#0	19.33	50	#0	19.33	75	#0	19.43	100	#0	19.41	0-2	

		21425 (2567.5MHz)			21400 (2565MHz)			21375 (2562.5MHz)			21350 (2560MHz)			MPR
High	QPSK	1	#0	21.18	1	#0	21.10	1	#0	21.19	1	#0	21.33	0
		1	#12	21.05	1	#25	21.07	1	#36	21.10	1	#49	21.10	0
		1	#24	21.00	1	#49	21.16	1	#74	21.15	1	#99	21.21	0
		12	#0	20.12	25	#0	20.20	36	#0	20.27	50	#0	20.29	0-1
		12	#6	20.21	25	#12	20.19	36	#18	20.13	50	#24	20.10	0-1
		12	#13	20.22	25	#25	20.18	36	#37	20.23	50	#49	20.25	0-1
		25	#0	20.18	50	#0	20.23	75	#0	20.27	100	#0	20.22	0-1
	16QAM	1	#0	20.65	1	#0	20.25	1	#0	20.65	1	#0	20.50	0-1
		1	#12	20.27	1	#25	20.47	1	#36	20.30	1	#49	20.30	0-1
		1	#24	20.09	1	#49	20.46	1	#74	20.51	1	#99	20.23	0-1
		12	#0	19.17	25	#0	19.17	36	#0	19.21	50	#0	19.22	0-2
		12	#6	19.20	25	#12	19.06	36	#18	19.20	50	#24	19.13	0-2
		12	#13	19.17	25	#25	19.10	36	#37	19.17	50	#49	19.07	0-2
		25	#0	19.18	50	#0	19.03	75	#0	19.15	100	#0	19.12	0-2

Band 12		1.4M			3M			5M			10M			MPR
Channel	Modulation	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	
		23017 (699.7MHz)			23025 (700.5MHz)			23035 (701.5MHz)			23060 (704MHz)			
Low	QPSK	1	#0	22.27	1	#0	22.21	1	#0	22.14	1	#0	22.20	0
		1	#2	22.25	1	#7	22.27	1	#12	22.23	1	#25	22.23	0
		1	#5	22.14	1	#14	22.11	1	#24	22.12	1	#49	22.17	0
		3	#0	22.21	8	#0	21.42	12	#0	21.21	25	#0	21.28	0-1
		3	#2	22.18	8	#4	21.32	12	#6	21.25	25	#12	21.31	0-1
		3	#3	22.24	8	#7	21.47	12	#13	21.24	25	#25	21.37	0-1
		6	#0	21.16	15	#0	21.25	25	#0	21.28	50	#0	21.29	0-1
	16QAM	1	#0	21.47	1	#0	21.72	1	#0	21.28	1	#0	21.43	0-1
		1	#2	21.69	1	#7	21.38	1	#12	21.49	1	#25	21.53	0-1
		1	#5	21.46	1	#14	21.75	1	#24	21.70	1	#49	21.89	0-1
		3	#0	21.31	8	#0	20.37	12	#0	20.23	25	#0	20.27	0-2
		3	#2	21.28	8	#4	20.28	12	#6	20.17	25	#12	20.22	0-2
		3	#3	21.24	8	#7	20.35	12	#13	20.40	25	#25	20.40	0-2
		6	#0	20.51	15	#0	20.23	25	#0	20.29	50	#0	20.21	0-2
Mid	QPSK	23095 (707.5MHz)			23095 (707.5MHz)			23095 (707.5MHz)			23095 (707.5MHz)			MPR
		1	#0	22.20	1	#0	22.17	1	#0	22.20	1	#0	22.12	0
		1	#2	22.42	1	#7	22.23	1	#12	22.22	1	#25	22.36	0
		1	#5	22.23	1	#14	22.25	1	#24	22.29	1	#49	22.37	0
		3	#0	22.25	8	#0	21.33	12	#0	21.34	25	#0	21.32	0-1
		3	#2	22.28	8	#4	21.35	12	#6	21.39	25	#12	21.35	0-1
		3	#3	22.35	8	#7	21.38	12	#13	21.33	25	#25	21.36	0-1
	6	#0	21.30	15	#0	21.22	25	#0	21.23	50	#0	21.27	0-1	
	16QAM	1	#0	21.44	1	#0	21.21	1	#0	21.38	1	#0	21.55	0-1
		1	#2	21.72	1	#7	21.78	1	#12	21.42	1	#25	21.51	0-1
		1	#5	21.28	1	#14	21.64	1	#24	21.50	1	#49	21.65	0-1
		3	#0	21.45	8	#0	20.52	12	#0	20.37	25	#0	20.39	0-2
		3	#2	21.19	8	#4	20.47	12	#6	20.48	25	#12	20.43	0-2
		3	#3	21.43	8	#7	20.39	12	#13	20.52	25	#25	20.45	0-2
6		#0	20.37	15	#0	20.35	25	#0	20.38	50	#0	20.34	0-2	

		23173 (715.3MHz)			23165 (714.5MHz)			23155 (713.5MHz)			23130 (711MHz)			MPR
High	QPSK	1	#0	22.35	1	#0	22.18	1	#0	22.27	1	#0	22.15	0
		1	#2	22.44	1	#7	22.23	1	#12	22.33	1	#25	22.20	0
		1	#5	22.34	1	#14	22.29	1	#24	22.35	1	#49	22.32	0
		3	#0	22.48	8	#0	21.29	12	#0	21.37	25	#0	21.33	0-1
		3	#2	22.36	8	#4	21.45	12	#6	21.43	25	#12	21.35	0-1
		3	#3	22.40	8	#7	21.40	12	#13	21.51	25	#25	21.42	0-1
		6	#0	21.36	15	#0	21.43	25	#0	21.36	50	#0	21.31	0-1
	16QAM	1	#0	21.53	1	#0	21.67	1	#0	21.32	1	#0	21.79	0-1
		1	#2	21.56	1	#7	21.32	1	#12	21.71	1	#25	21.88	0-1
		1	#5	21.50	1	#14	21.85	1	#24	21.77	1	#49	21.86	0-1
		3	#0	21.54	8	#0	20.38	12	#0	20.33	25	#0	20.31	0-2
		3	#2	21.43	8	#4	20.35	12	#6	20.48	25	#12	20.39	0-2
		3	#3	21.50	8	#7	20.50	12	#13	20.53	25	#25	20.41	0-2
		6	#0	20.48	15	#0	20.29	25	#0	20.27	50	#0	20.36	0-2

Band 13		5M			10M			MPR
Channel	Modulation	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	
		23205 (779.5MHz)			23230 (782MHz)			
Low	QPSK	1	#0	22.70	N/A	N/A	N/A	0
		1	#12	22.81	N/A	N/A	N/A	0
		1	#24	22.71	N/A	N/A	N/A	0
		12	#0	21.93	N/A	N/A	N/A	0-1
		12	#6	21.67	N/A	N/A	N/A	0-1
		12	#13	21.86	N/A	N/A	N/A	0-1
		25	#0	21.73	N/A	N/A	N/A	0-1
	16QAM	1	#0	22.00	N/A	N/A	N/A	0-1
		1	#12	22.16	N/A	N/A	N/A	0-1
		1	#24	21.70	N/A	N/A	N/A	0-1
		12	#0	20.89	N/A	N/A	N/A	0-2
		12	#6	20.95	N/A	N/A	N/A	0-2
		12	#13	20.92	N/A	N/A	N/A	0-2
		25	#0	20.82	N/A	N/A	N/A	0-2
Mid	QPSK	23230 (782MHz)			23230 (782MHz)			MPR
		1	#0	22.79	1	#0	23.3	0
		1	#12	22.82	1	#25	23.3	0
		1	#24	22.74	1	#49	23.4	0
		12	#0	21.91	25	#0	22.4	0-1
		12	#6	21.81	25	#12	22.3	0-1
		12	#13	21.80	25	#25	22.4	0-1
	25	#0	21.85	50	#0	22.4	0-1	
	16QAM	1	#0	22.37	1	#0	22.4	0-1
		1	#12	22.05	1	#25	22.3	0-1
		1	#24	21.82	1	#49	22.2	0-1
		12	#0	20.89	25	#0	21.3	0-2
		12	#6	20.92	25	#12	21.2	0-2
		12	#13	20.87	25	#25	21.3	0-2
25		#0	20.91	50	#0	21.4	0-2	

		23255 (784.5MHz)			23230 (782MHz)			MPR
High	QPSK	1	#0	22.80	N/A	N/A	N/A	0
		1	#12	22.65	N/A	N/A	N/A	0
		1	#24	22.69	N/A	N/A	N/A	0
		12	#0	21.86	N/A	N/A	N/A	0-1
		12	#6	21.85	N/A	N/A	N/A	0-1
		12	#13	21.77	N/A	N/A	N/A	0-1
		25	#0	21.67	N/A	N/A	N/A	0-1
	16QAM	1	#0	21.81	N/A	N/A	N/A	0-1
		1	#12	22.22	N/A	N/A	N/A	0-1
		1	#24	21.78	N/A	N/A	N/A	0-1
		12	#0	20.77	N/A	N/A	N/A	0-2
		12	#6	20.81	N/A	N/A	N/A	0-2
		12	#13	20.84	N/A	N/A	N/A	0-2
		25	#0	20.79	N/A	N/A	N/A	0-2

Band 17		5M			10M			MPR
Channel	Modulation	RB No.	RB Offset	Max Power	RB No.	RB Offset	Max Power	
		23755 (706.5MHz)			23780 (709MHz)			
Low	QPSK	1	#0	22.22	1	#0	22.03	0
		1	#12	22.09	1	#25	22.12	0
		1	#24	22.01	1	#49	22.31	0
		12	#0	21.15	25	#0	21.02	0-1
		12	#6	21.16	25	#12	21.21	0-1
		12	#13	21.25	25	#25	21.34	0-1
		25	#0	21.20	50	#0	21.32	0-1
	16QAM	1	#0	21.36	1	#0	21.77	0-1
		1	#12	21.29	1	#25	21.82	0-1
		1	#24	21.21	1	#49	21.76	0-1
		12	#0	20.24	25	#0	20.17	0-2
		12	#6	20.12	25	#12	20.26	0-2
		12	#13	20.15	25	#25	20.33	0-2
		25	#0	20.29	50	#0	20.21	0-2
Mid	QPSK	23790 (710MHz)			23790 (710MHz)			MPR
		1	#0	22.22	1	#0	22.02	0
		1	#12	22.12	1	#25	22.24	0
		1	#24	22.15	1	#49	22.21	0
		12	#0	21.24	25	#0	21.23	0-1
		12	#6	21.29	25	#12	21.26	0-1
		12	#13	21.25	25	#25	21.24	0-1
	25	#0	21.15	50	#0	21.31	0-1	
	16QAM	1	#0	21.37	1	#0	21.11	0-1
		1	#12	21.66	1	#25	21.82	0-1
		1	#24	21.47	1	#49	21.84	0-1
		12	#0	20.19	25	#0	20.17	0-2
		12	#6	20.31	25	#12	20.31	0-2
		12	#13	20.40	25	#25	20.35	0-2
25		#0	20.22	50	#0	20.29	0-2	



		23825 (713.5MHz)			23800 (711MHz)			MPR
High	QPSK	1	#0	22.17	1	#0	22.01	0
		1	#12	22.21	1	#25	22.34	0
		1	#24	22.24	1	#49	22.15	0
		12	#0	21.29	25	#0	21.21	0-1
		12	#6	21.36	25	#12	21.13	0-1
		12	#13	21.32	25	#25	21.20	0-1
		25	#0	21.26	50	#0	21.29	0-1
	16QAM	1	#0	21.32	1	#0	21.63	0-1
		1	#12	21.15	1	#25	21.75	0-1
		1	#24	21.83	1	#49	21.56	0-1
		12	#0	20.36	25	#0	20.27	0-2
		12	#6	20.41	25	#12	20.12	0-2
		12	#13	20.39	25	#25	20.28	0-2
		25	#0	20.34	50	#0	20.22	0-2

### Radiated Power

#### Band 2-15M(QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	SA Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
CH 18675							
1857.5	H	10.4	1.71	10.04	18.73	33	-19.77
1857.5	V	6.16	1.71	10.04	14.49	33	-24.01
CH 18900							
1880	H	11.39	1.71	10.04	19.72	33	-18.78
1880	V	7.16	1.71	10.04	15.49	33	-23.01
CH 19125							
1902.5	H	11.23	1.71	10.04	19.56	33	-18.94
1902.5	V	7.57	1.71	10.04	15.9	33	-22.6

#### Band 2-15M(16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	SA Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
CH 18675							
1857.5	H	8.59	1.71	10.04	16.92	33	-21.58
1857.5	V	5.55	1.71	10.04	13.88	33	-24.62
CH 18900							
1880	H	9.88	1.71	10.04	18.21	33	-20.29
1880	V	6.69	1.71	10.04	15.02	33	-23.48
CH 19125							
1902.5	H	10.81	1.71	10.04	19.14	33	-19.36
1902.5	V	6.66	1.71	10.04	14.99	33	-23.51

Note:

- ERP (dBm) / EIRP (dBm)=  
SG (dBm) - Cable Loss (dB) + Substitute Antenna Gain (dBd/dBi)
- This unit was tested with its standard adapter.
- The EUT was tested in three orthogonal planes and in all possible test configurations and positioning.
- After the observation, the results of other supportive bands are better than the original report. So, only the worse cases will be demonstrated in the report.

## Radiated Spurious Emission

Band 2-20M

Frequency (MHz)	Ant. Pol. (H/V)	SA Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
CH 18700							
3720	H	-52.68	3.05	12.32	-43.41	-13	-30.41
5580	H	-62.35	4.02	13.02	-53.35	-13	-40.35
3720	H	-57.2	3.05	12.32	-47.93	-13	-34.93
5580	V	-61.38	4.02	13.02	-52.38	-13	-39.38
CH 18900							
3760	H	-51.15	3.05	12.32	-41.88	-13	-28.88
5640	H	-62.52	4.02	13.02	-53.52	-13	-40.52
3760	H	-58.08	3.05	12.32	-48.81	-13	-35.81
5640	V	-61.75	4.02	13.02	-52.75	-13	-39.75
CH 19100							
3800	H	-53.13	3.05	12.32	-43.86	-13	-30.86
5700	H	-61.78	4.02	13.02	-52.78	-13	-39.78
3800	H	-57.76	3.05	12.32	-48.49	-13	-35.49
5700	V	-61.15	4.02	13.02	-52.15	-13	-39.15

Note:

- Spurious emissions within 30-1000MHz & Other harmonic were found more than 20dB below limit line.
- $EIRP (dBm) = SG (dBm) - Cable Loss (dB) + Substitute Antenna Gain (dBi)$
- After the observation, the results of other supportive bands are better than the original report. So, only the worse cases will be demonstrated in the report.

## 7.6. Peak-Average Ratio


### 7.6.1 Test Limit

The transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

### 7.6.2 Test Procedure

KDB 971168 D01v02r02 - Section 5.7 & ANSI/TIA-603-D-2010

### 7.6.3 Test Setup

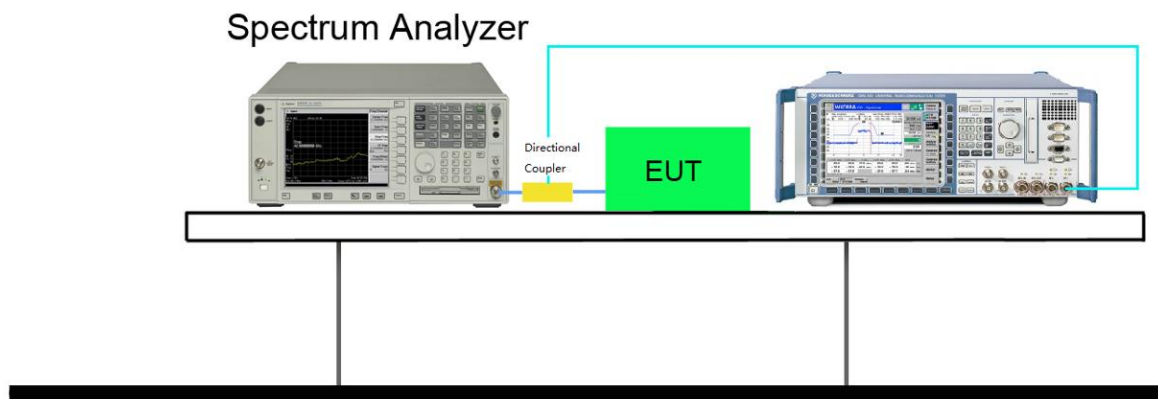

#### 7.6.4 Test Result

Refer to the original report No.: 1801TW1902-U8.

## 7.7. Frequency Stability Under Temperature & Voltage Variations

### 7.7.1 Test Limit


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit	$< \pm 2.5$ ppm
-------	-----------------

### 7.7.2 Test Procedure

KDB 971168 D01v02r02 - Section 9.0 & ANSI/TIA-603-D-2010

### 7.7.3 Test Setup

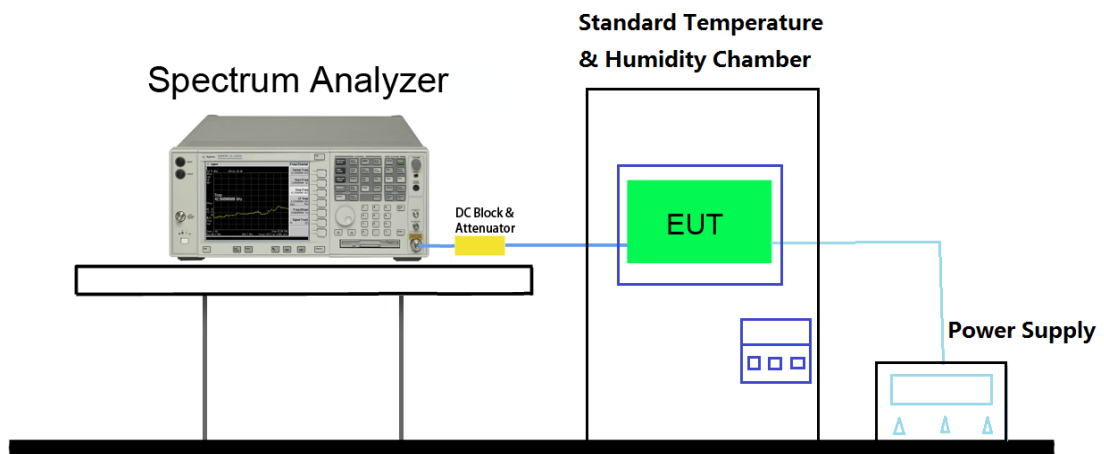

#### 7.7.4 Test Result

Refer to the original report No.: 1801TW1902-U8.

————— The End —————