



## RF MEASUREMENT REPORT

---

**FCC ID:** YY3-14249P  
**Application:** Handheld Group AB  
**Product:** Nautiz X9  
**Model No.:** NX9V2-RF1-AS0, NX9V2-RF1-A00  
**Brand Name:** Handheld  
**FCC Rule Part(s):** Part 2, 22 (H), 24 (E), 27  
**Test Date:** October 20 ~ November 29, 2021

**Reviewed By:**



Kevin Guo

**Approved By:**



Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

### Revision History

Report No.	Version	Description	Issue Date	Note
2109RSU034-U6	Rev. 01	Initial Report	11-29-2021	

## CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>5</b>
1.1. Applicant .....	5
1.2. Manufacturer .....	5
1.3. Testing Facility .....	5
1.4. Equipment Description .....	6
1.5. Radio Specification .....	7
1.6. Maximum Power, Frequency Tolerance, and Emission Designator .....	7
1.7. Antenna Details .....	7
<b>2. Test Configuration .....</b>	<b>8</b>
2.1. Test System Connection Diagram .....	8
2.2. Applied Standards .....	8
2.3. Test Environment Condition .....	8
<b>3. Measuring Instrument .....</b>	<b>9</b>
<b>4. Measurement Uncertainty .....</b>	<b>11</b>
<b>5. Test Result .....</b>	<b>12</b>
5.1. Summary .....	12
5.2. Occupied Bandwidth .....	13
5.2.1. Test Limit .....	13
5.2.2. Test Procedure .....	13
5.2.3. Test Setting .....	13
5.2.4. Test Setup .....	13
5.2.5. Test Result .....	14
5.3. Frequency Stability Measurement .....	17
5.3.1. Test Limit .....	17
5.3.2. Test Procedures Used .....	17
5.3.3. Test Setting .....	17
5.3.4. Test Setup .....	18
5.3.5. Test Result .....	19
5.4. Equivalent Isotropically Radiated Power Measurement .....	22
5.4.1. Test Limit .....	22
5.4.2. Test Procedures Used .....	22
5.4.3. Test Setting .....	22
5.4.4. Test Setup .....	23
5.4.5. Test Result .....	24
5.5. Band Edge Measurement .....	27
5.5.1. Test Limit .....	27

---

5.5.2.	Test Procedure Used .....	27
5.5.3.	Test Setting .....	27
5.5.4.	Test Setup .....	28
5.5.5.	Test Result .....	29
5.6.	Peak to Average Ratio .....	30
5.6.1.	Test Limit .....	30
5.6.2.	Test Procedure Used .....	30
5.6.3.	Test Setting .....	30
5.6.4.	Test Setup .....	30
5.6.5.	Test Result .....	31
5.7.	Conducted Spurious Emissions .....	34
5.7.1.	Test Limit .....	34
5.7.2.	Test Procedure Used .....	34
5.7.3.	Test Setting .....	34
5.7.4.	Test Setup .....	35
5.7.5.	Test Result .....	36
5.8.	Radiated Spurious Emissions Measurements .....	39
5.8.1.	Test Limit .....	39
5.8.2.	Test Procedure Used .....	39
5.8.3.	Test Setting .....	39
5.8.4.	Test Setup .....	39
5.8.5.	Test Result .....	41
<b>6.</b>	<b>Conclusion .....</b>	<b>44</b>

## 1. General Information

### 1.1. Applicant

Handheld Group AB

Strandgatan 40 531 30 LIDKÖPING Sweden

### 1.2. Manufacturer

Handheld Group AB

Strandgatan 40 531 30 LIDKÖPING Sweden

### 1.3. Testing Facility

<input checked="" type="checkbox"/>	<b>Test Site - MRT Suzhou Laboratory</b>
	<b>Laboratory Location (Suzhou - Wuzhong)</b> D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	<b>Laboratory Location (Suzhou - SIP)</b> 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.01 CNAS: L10551
	FCC: CN1166 ISED: CN0001
	VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020 <input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104
<input type="checkbox"/>	<b>Test Site - MRT Shenzhen Laboratory</b>
	<b>Laboratory Location (Shenzhen)</b> 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.02 CNAS: L10551
	FCC: CN1284 ISED: CN0105
<input type="checkbox"/>	<b>Test Site - MRT Taiwan Laboratory</b>
	<b>Laboratory Location (Taiwan)</b> No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	<b>Laboratory Accreditations</b>
	TAF: L3261-190725
	FCC: 291082, TW3261 ISED: TW3261

#### 1.4. Equipment Description

Product Name	Nautiz X9
Model No.	NX9V2-RF1-AS0, NX9V2-RF1-A00
Brand Name	Handheld
Wi-Fi Specification	802.11a/b/g/n/ac
Bluetooth Version	Bluetooth v5.0 Dual Mode
Wi-Fi Specification	802.11a/b/g/n/ac
GSM Bands	GSM850 / 1900
WCDMA Bands	Band II / IV / V
LTE Bands	FDD Band: 2, 4, 5,12, 17 TDD Band: 41
NFC Specification	13.56MHz
GNSS Specification	GPS / GLONASS / Beidou / Galileo
Software version	V000.06.00
Hardware version	DVT
Antenna Information	Refer to section 1.7
IMEI No.	Conducted Measurement: 358591250000136 Radiated Measurement: 35859125000698
Accessories	
Battery	Brand Name: Handheld Model: NX9V2-1004 Capacity: Typical 3.8V, 4800mAh, 18.24Wh
Power Adapter	MFR: Pihong Technology Co. Ltd. Model: PSAF10R-050Q Input: AC 100-240V~0.3A, 50-60Hz Output: DC 5V-2.0A
Micro USB Cable	Length: Shielded, 1.0m
Remark:	
1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

Note:

1. Model Difference Description (declared by the manufacturer)

Model Number	Model Difference	Note
NX9V2-RF1-AS0	Support Barcode	--
NX9V2-RF1-A00	Not Barcode	Remove barcode hardware

2. The difference does not affect the RF test result, so we selected NX9V2-RF1-AS0 for all RF testing.

### 1.5. Radio Specification

Tx Frequency Range	Band II: 1850 ~ 1910MHz Band IV: 1710 ~ 1755MHz Band V: 824 ~ 849MHz
Rx Frequency Range	Band II: 1930 ~ 1990MHz Band IV: 2110 ~ 2155MHz Band V: 869 ~ 894MHz

### 1.6. Maximum Power, Frequency Tolerance, and Emission Designator


FCC Rule	System	Modulation	Maximum Power (W)	Frequency Tolerance (ppm)	Emission Designator
Part 24	WCDMA Band II RMC 12.2Kbps	BPSK	0.2612	-0.0080	4M22F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	BPSK	0.2600	-0.0090	4M33F9W
Part 22	WCDMA Band V RMC 12.2Kbps	BPSK	0.0289	-0.0170	5M52F9W

### 1.7. Antenna Details

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
WCDMA Band V	824 ~ 849 MHz	FPC Antenna	-6.34
WCDMA Band II	1710 ~ 1755MHz		1.07
WCDMA Band IV	1850 ~ 1910 MHz		

## 2. Test Configuration

### 2.1. Test System Connection Diagram

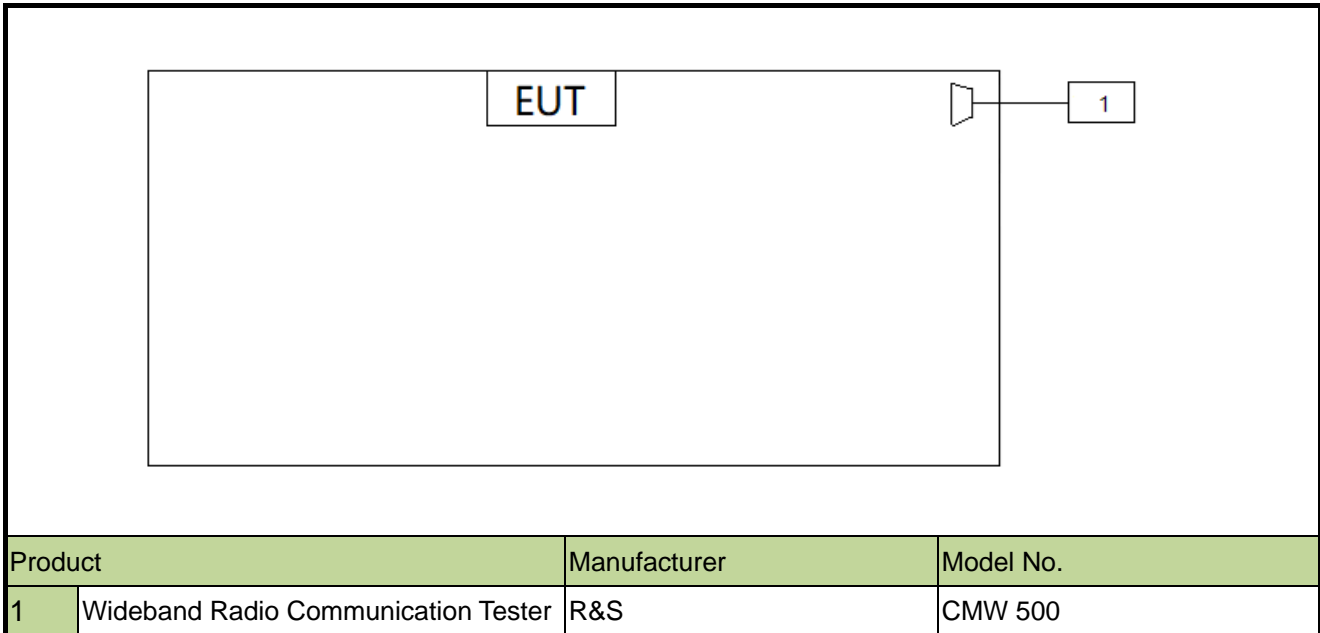

### 2.2. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 22, Part 24, Part 27
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

### 2.3. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH



### 3. Measuring Instrument

No.	Instrument	Manufacturer	Model No.	Asset No.	Last Cali. Date	Cali. Due Date	Test Site
1	Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2022/10/10	WZ-TR3
2	EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022/1/12	SIP-AC1/SIP-AC2/SIP-AC3
3	Vibration Test System	DongLing	ES-1-150	MRTSUE06206	1 year	2022/8/8	WZ-TR3
4	Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2022/2/25	WZ-SR6
5	Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2022/6/28	WZ-TR3
6	Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	/	/	WZ-SR6
7	Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/6/24	SIP-AC1/SIP-AC2/SIP-AC3/SIP-SR1
8	Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2022/10/10	WZ-SR6
9	Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2022/10/20	SIP-AC2
10	Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2022/10/11	SIP-AC2
11	Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2022/10/31	SIP-AC1/SIP-AC2/SIP-AC3/SIP-SR1
12	Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2022/9/7	SIP-AC1/SIP-AC2/SIP-AC3/SIP-SR1
13	Signal Generator	Keysight	N5173B	MRTSUE06606	1 year	2021/12/3	WZ-SR6
14	EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/6/24	SIP-AC1/SIP-AC2/SIP-AC3
15	Thermohygrometer	testo	608-H1	MRTSUE06623	1 year	2021/12/3	SIP-AC2
16	Thermohygrometer	testo	608-H1	MRTSUE06624	1 year	2021/12/3	SIP-AC2
17	Preamplifier	EMCI	EMC001330	MRTSUE06643	1 year	2022/1/14	SIP-AC1/SIP-AC2/SIP-AC3
18	Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2022/11/8	SIP-AC2
19	TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06647	1 year	2022/8/5	SIP-AC2
20	Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2022/11/9	SIP-AC2/SIP-AC4
21	Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021/12/24	SIP-AC2
22	Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022/3/9	SIP-AC1/SIP-AC2/SIP-AC3
23	5G Wireless Test Platform	Keysight	E7515B	MRTSUE06942	1 year	2022/3/29	WZ-SR6

No.	Instrument	Manufacturer	Model No.	Asset No.	Last Cali. Date	Cali. Due Date	Test Site
24	Radio Communication Analyzer	Anritsu	MT8821C	MRTSUE06960	1 year	2022/7/1	WZ-SR6
25	Radio Communication Test Station	Anritsu	MT8000A	MRTSUE06961	1 year	2022/7/1	WZ-SR6

Software	Version	Function
EMI Software	V3	EMI Test Software

#### 4. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>Radiated Spurious Emissions</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
<b>Conducted Spurious Emissions</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%
<b>Frequency Stability</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 76.2Hz

## 5. Test Result

### 5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
2.1049	Occupied Bandwidth	Conducted	Pass
2.1055, 22.355, 24.235, 27.54	Frequency Stability		Pass
22.913(a)(5)	Equivalent Radiated Power		Pass
27.50(d)(4), 24.232(c)	Equivalent Isotropic Radiated Power		Pass
2.1051, 22.917(a), 24.238(a), 27.53(h)	Band Edge		Pass
24.232(d), 27.50(d)(5)	Peak to Average Ratio		Pass
2.1051, 22.917(a), 24.238(a), 27.53(h)	Spurious Emission		Pass
2.1053, 22.917(a), 24.238(a), 27.53(h)	Spurious Emissions	Radiated	Pass

#### Notes:

1. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2. All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

## 5.2. Occupied Bandwidth

### 5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


### 5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

### 5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.


### 5.2.4. Test Setup

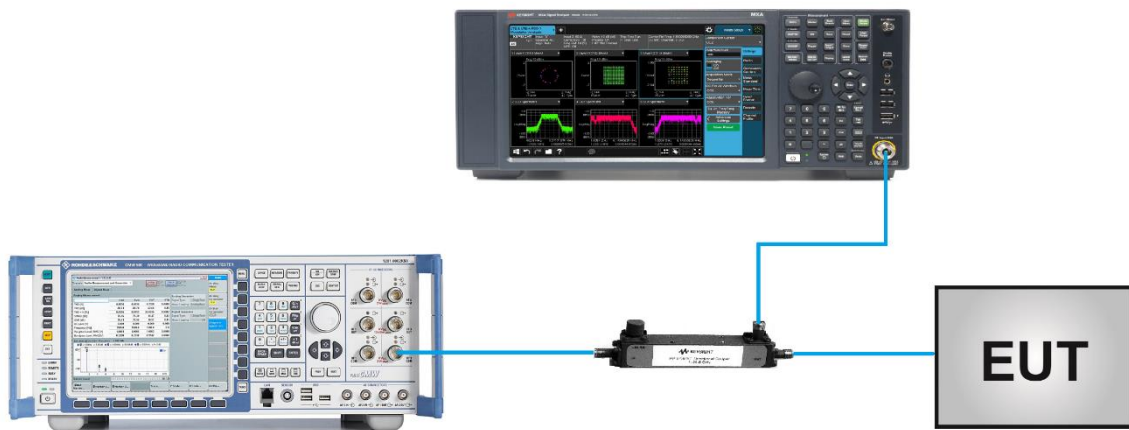

**5.2.5. Test Result**


Test Site	WZ-SR6	Test Engineer	Candy Luo
Test Date	2021/11/08	Test Band	WCDMA Band II

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	1852.4	4.17
Middle	1880.0	4.18
High	1907.6	4.22

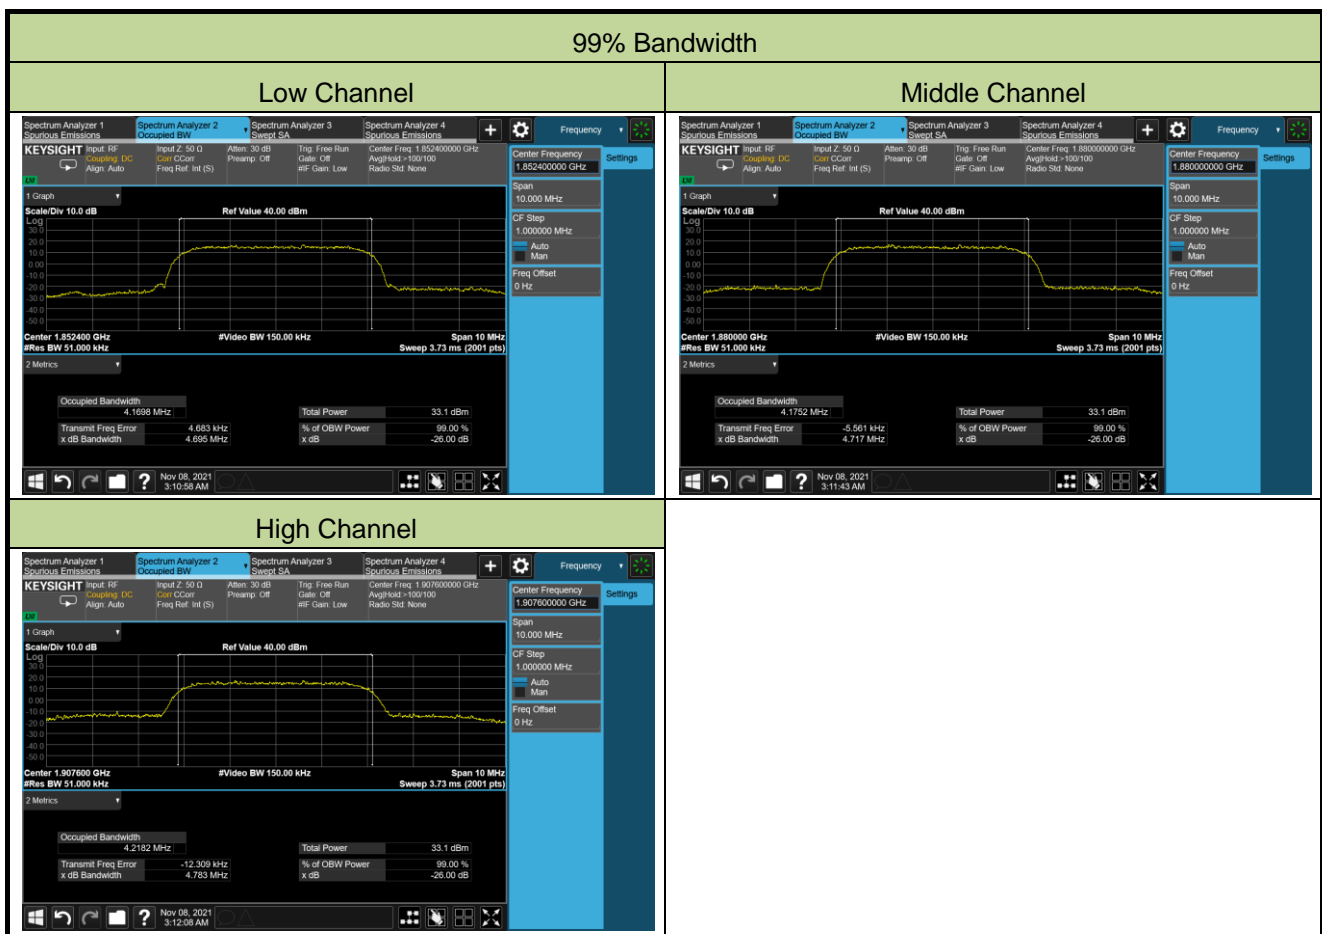


Test Site	WZ-SR6	Test Engineer	Candy Luo
Test Date	2021/11/08	Test Band	WCDMA Band IV

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	1712.4	4.30
Middle	1732.4	4.33
High	1752.6	4.16

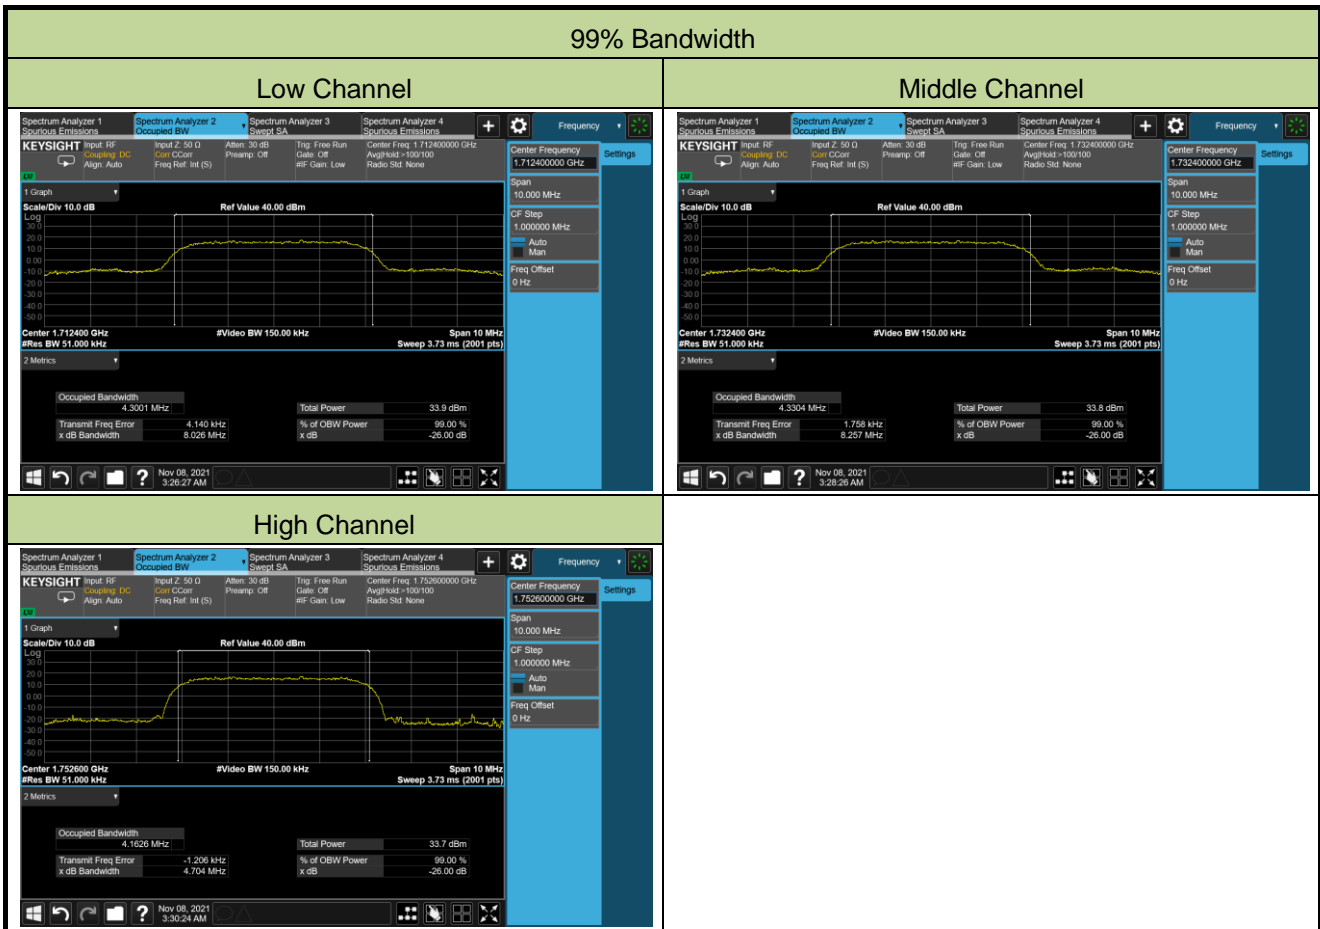

Test Site	WZ-SR6	Test Engineer	Candy Luo
Test Date	2021/11/08	Test Band	WCDMA Band V

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	826.4	5.52
Middle	836.4	4.18
High	846.6	4.29

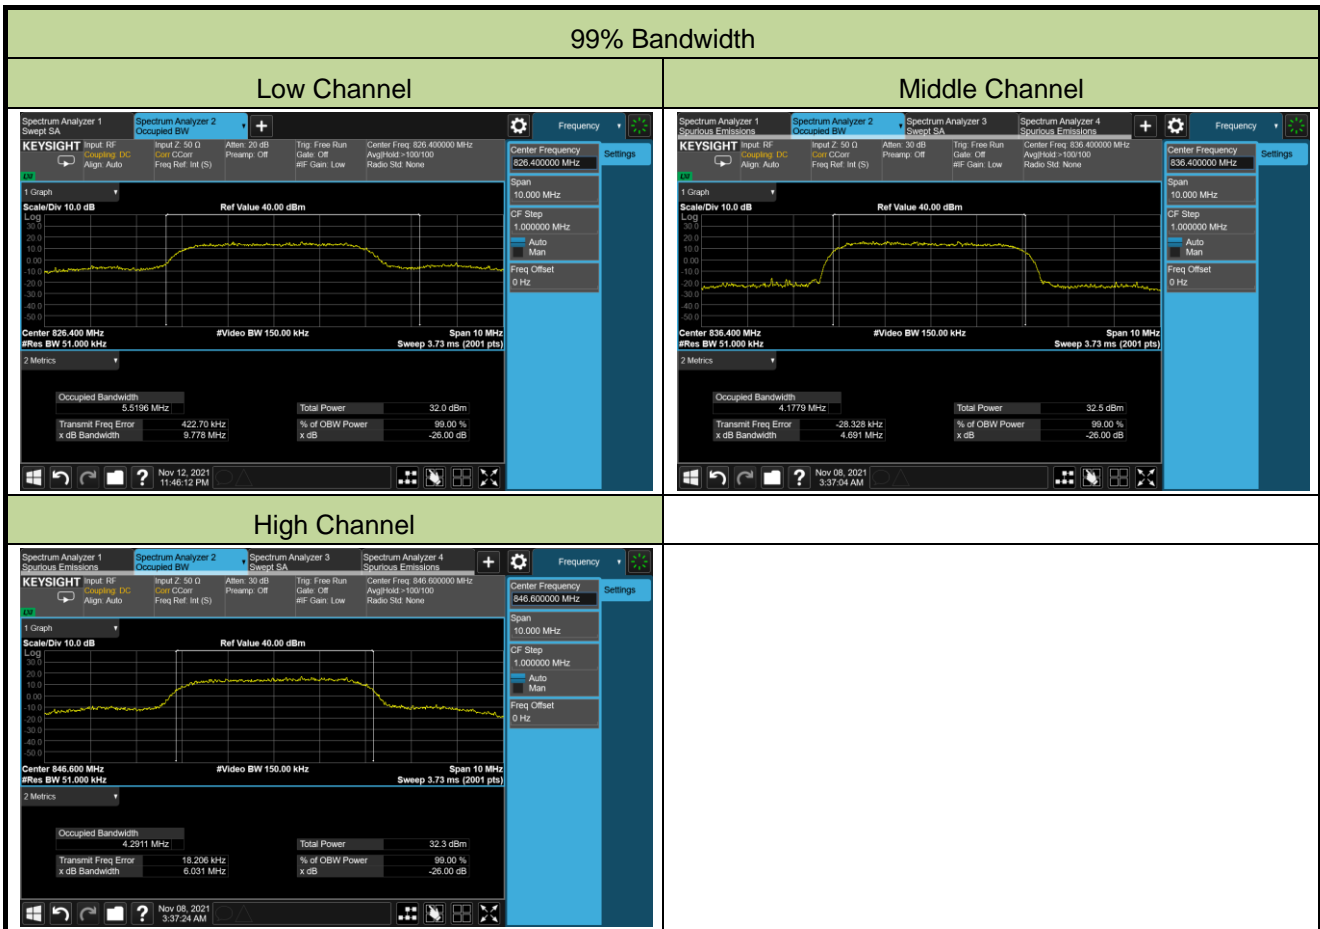



### **5.3. Frequency Stability Measurement**

#### **5.3.1. Test Limit**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **5.3.2. Test Procedures Used**

ANSI C63.26-2015 - Section 5.6

#### **5.3.3. Test Setting**

##### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to High. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the Low temperature reached.

##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 5.3.4. Test Setup

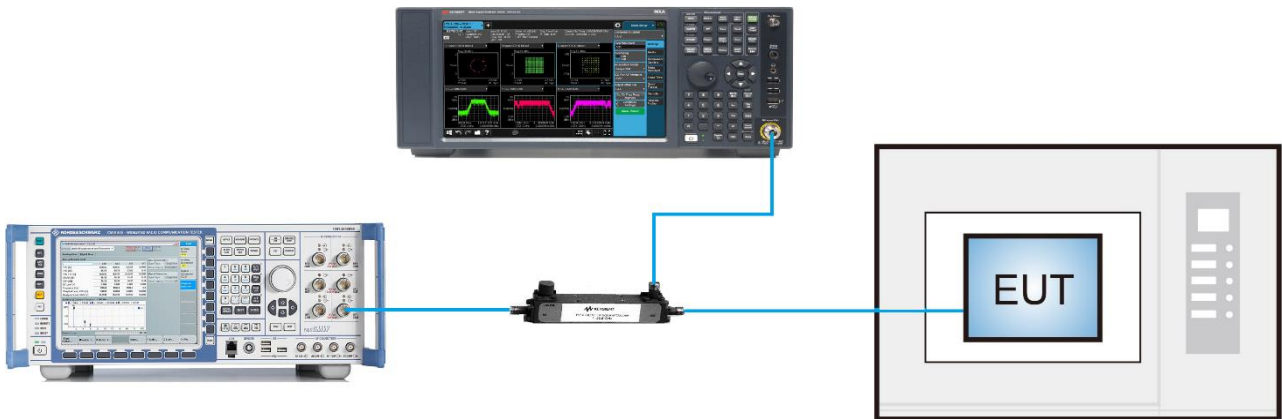

**5.3.5. Test Result**

Test Site	WZ-TR3	Test Engineer	Candy Luo
Test Date	2021/11/20	Test Band	WCDMA Band II

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0051
	- 20	-0.0093
	- 10	-0.0052
	0	-0.0066
	+ 10	-0.0039
	+ 20 (Ref)	-0.0036
	+ 30	-0.0080
	+ 40	-0.0054
	+ 50	-0.0076
4.4	+ 20	-0.0025
3.6	+ 20	-0.0035

Note: Normal Voltage =3.8V; Battery End point (BEP) =3.6V.

Test Site	WZ-TR3	Test Engineer	Candy Luo
Test Date	2021/11/20	Test Band	WCDMA Band IV

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0038
	- 20	-0.0058
	- 10	-0.0059
	0	-0.0066
	+ 10	-0.0066
	+ 20 (Ref)	-0.0080
	+ 30	-0.0048
	+ 40	-0.0038
	+ 50	-0.0090
4.4	+ 20	-0.0067
3.6	+ 20	-0.0061

Note: Normal Voltage =3.8V; Battery End point (BEP) =3.6V.

Test Site	WZ-TR3	Test Engineer	Candy Luo
Test Date	2021/11/20	Test Band	WCDMA Band V

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0114
	- 20	-0.0103
	- 10	-0.0170
	0	-0.0081
	+ 10	-0.0134
	+ 20 (Ref)	-0.0118
	+ 30	-0.0057
	+ 40	-0.0129
	+ 50	-0.0068
4.4	+ 20	-0.0061
3.6	+ 20	-0.0053

Note: Normal Voltage =3.8V; Battery End point (BEP) =3.6V.

## 5.4. Equivalent Isotropically Radiated Power Measurement

### 5.4.1. Test Limit

#### Band 2:

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

#### Band 4:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

#### Band 5:

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

### 5.4.2. Test Procedures Used

ANSI C63.26-2015 - Section 5.2

### 5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_T$  gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

### 5.4.4. Test Setup



**5.4.5. Test Result**

Test Site	WZ-SR6	Test Engineer	Candy Luo
Test Date	2021/10/27	Test Band	WCDMA Band II

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Band II Channel				Band II Channel		
		9262	9400	9538		9262	9400	9538
WCDMA R99	1	22.72	22.87	23.10	1.07	23.79	23.94	24.17
HSDPA	1	21.79	21.91	22.13	1.07	22.86	22.98	23.20
	2	21.70	21.90	22.11	1.07	22.77	22.97	23.18
	3	21.19	21.43	21.63	1.07	22.26	22.50	22.70
	4	21.21	21.41	21.62	1.07	22.28	22.48	22.69
HSUPA	1	20.26	20.38	21.62	1.07	21.33	21.45	22.69
	2	19.76	19.89	20.64	1.07	20.83	20.96	21.71
	3	20.77	20.90	20.14	1.07	21.84	21.97	21.21
	4	19.28	20.90	19.64	1.07	20.35	21.97	20.71
	5	20.73	20.90	21.08	1.07	21.80	21.97	22.15
Limit	33.01dBm							

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)



Test Site	WZ-SR6	Test Engineer	Candy Luo
Test Date	2021/10/27	Test Band	WCDMA Band IV

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Band IV Channel				Band IV Channel		
		1312	1412	1513		1312	1412	1513
WCDMA R99	1	23.07	23.03	23.08	1.07	24.14	24.10	24.15
HSDPA	1	22.16	22.13	22.14	1.07	23.23	23.20	23.21
	2	22.15	22.10	22.08	1.07	23.22	23.17	23.15
	3	21.69	21.57	21.60	1.07	22.76	22.64	22.67
	4	21.67	21.58	21.58	1.07	22.74	22.65	22.65
HSUPA	1	20.14	20.09	20.09	1.07	21.21	21.16	21.16
	2	20.15	20.09	20.12	1.07	21.22	21.16	21.19
	3	21.14	21.10	21.09	1.07	22.21	22.17	22.16
	4	19.65	21.10	19.59	1.07	20.72	22.17	20.66
	5	21.10	21.06	21.09	1.07	22.17	22.13	22.16
Limit	30.00dBm							

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Test Site	WZ-SR6	Test Engineer	Candy Luo
Test Date	2021/10/27	Test Band	WCDMA Band V

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	ERP (dBm)		
		Band V Channel				Band V Channel		
		4132	4182	4233		4132	4182	4233
WCDMA R99	1	22.95	23.10	22.95	-6.34	14.46	14.61	14.46
HSDPA	1	22.08	22.16	22.03	-6.34	13.59	13.67	13.54
	2	22.02	22.12	22.00	-6.34	13.53	13.63	13.51
	3	21.54	21.62	21.51	-6.34	13.05	13.13	13.02
	4	21.51	21.61	21.49	-6.34	13.02	13.12	13.00
HSUPA	1	20.59	20.64	20.52	-6.34	12.10	12.15	12.03
	2	20.08	20.15	20.01	-6.34	11.59	11.66	11.52
	3	21.06	21.11	21.00	-6.34	12.57	12.62	12.51
	4	19.63	21.11	19.55	-6.34	11.14	12.62	11.06
	5	21.04	21.14	21.02	-6.34	12.55	12.65	12.53
Limit	38.45dBm							

Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) – 2.15

## **5.5. Band Edge Measurement**

### **5.5.1. Test Limit**

For operations in the 824 ~ 849 MHz, 1850 ~ 1910 MHz, 1930 ~ 1990 MHz, 698 ~ 746 MHz and 1710 ~ 1755 MHz, the FCC limit is  $43 + 10\log_{10}(P_{\text{Watts}})$  dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


### **5.5.2. Test Procedure Used**

ANSI C63.26-2015 - Section 5.7

### **5.5.3. Test Setting**


1. Set the analyzer frequency to low or high channel
2.  $RBW \geq$  The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3.  $VBW \geq 3*RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.5.4. Test Setup

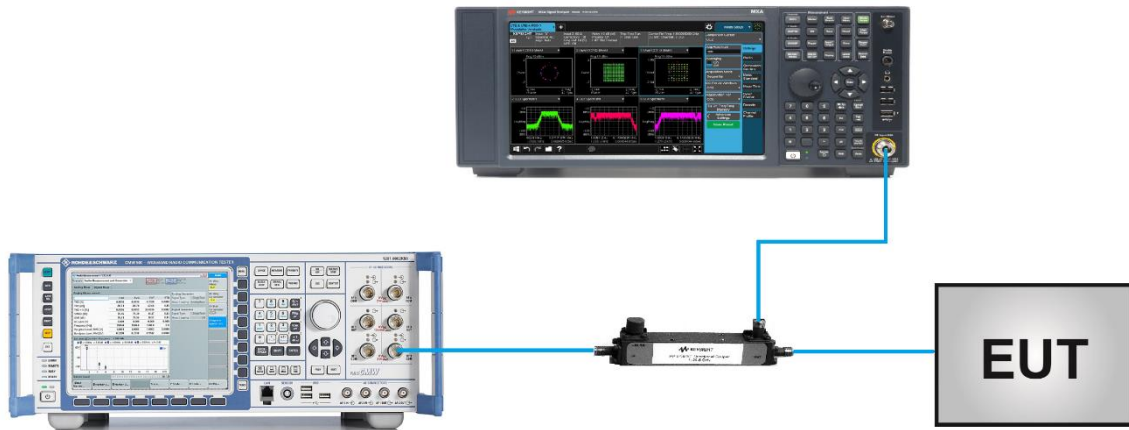

**5.5.5. Test Result**

Test Site	WZ-SR6	Test Engineer	Candy Luo
Test Date	2021/11/08 ~ 2021/11/28	Test Band	WCDMA Band II, IV, V

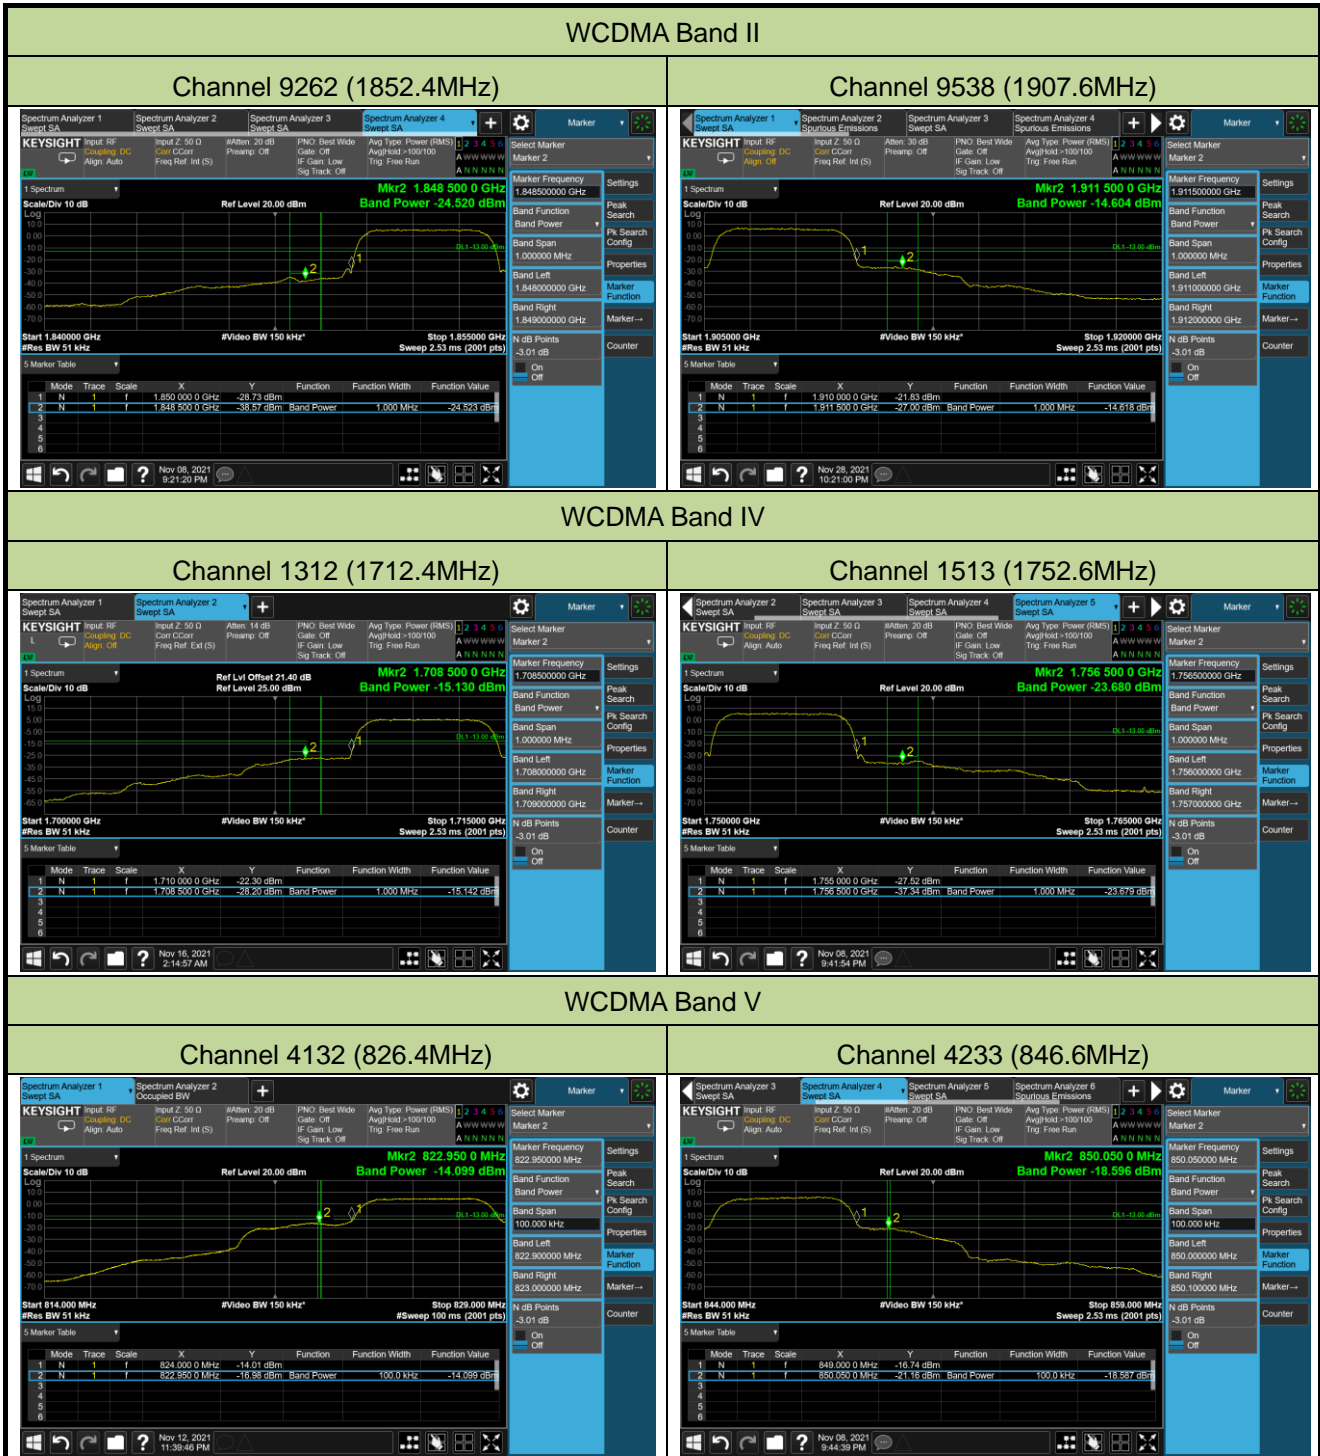

## 5.6. Peak to Average Ratio

### 5.6.1. Test Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.


### 5.6.2. Test Procedure Used

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF).

### 5.6.3. Test Setting

1. Set the resolution / measurement bandwidth  $\geq$  signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%

### 5.6.4. Test Setup

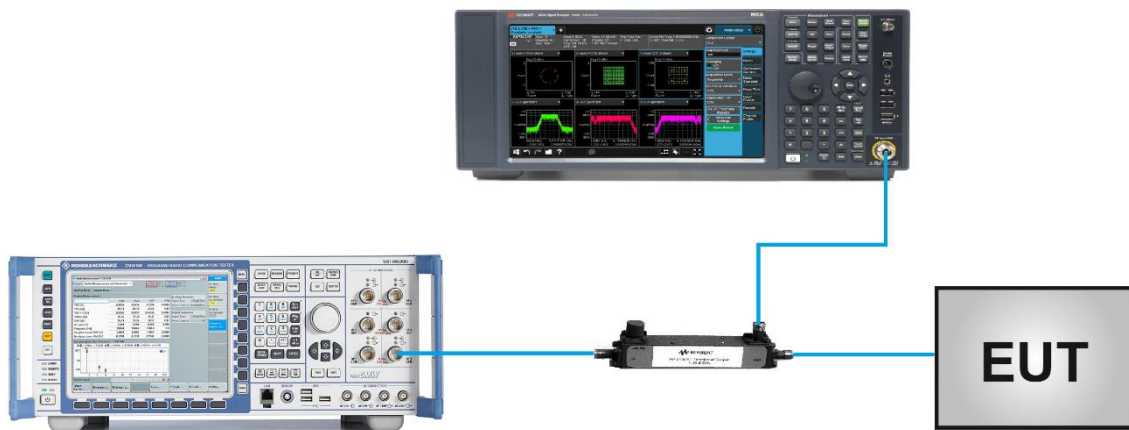


**5.6.5. Test Result**

Test Site	WZ-SR6	Test Engineer	Candy Luo
Test Date	2021/11/08	Test Band	WCDMA Band II, IV, V


Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)
<b>Band II</b>				
9262	1852.5	5	2.75	≤ 13.00
9400	1880.0	5	2.56	≤ 13.00
9538	1907.6	5	2.13	≤ 13.00
<b>Band IV</b>				
1312	1712.4	5	1.92	≤ 13.00
1412	1732.4	5	1.87	≤ 13.00
1513	1752.6	5	2.90	≤ 13.00
<b>Band V (Report Only)</b>				
4132	826.4	5	4.35	≤ 13.00
4183	836.4	5	2.99	≤ 13.00
4233	846.6	5	2.41	≤ 13.00

## WCDMA Band II


## Channel 9262 (1852.4MHz)

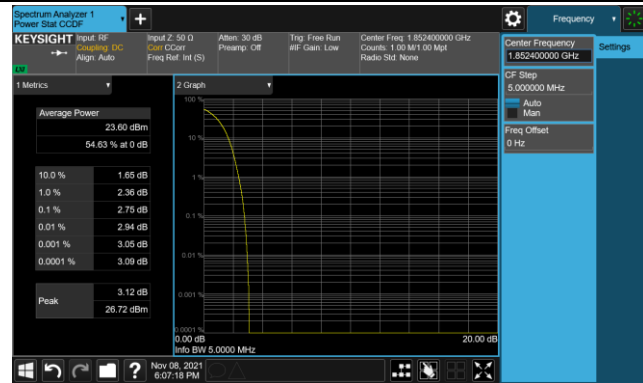

## Channel 9400 (1880.0MHz)

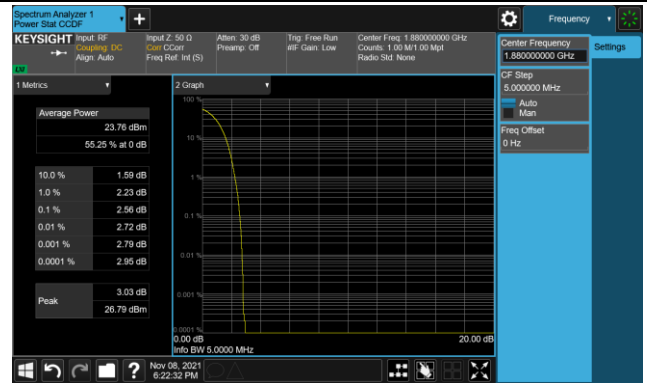


## Channel 9538 (1907.6MHz)

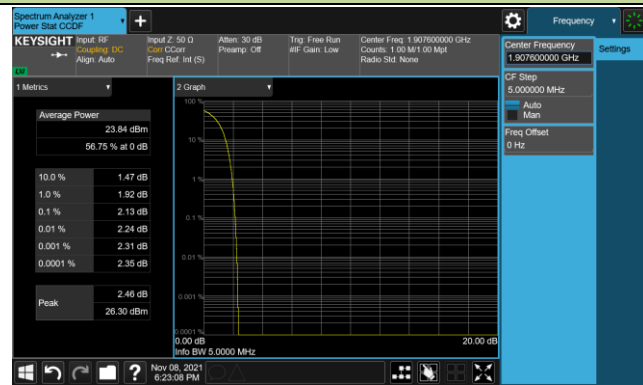


## WCDMA Band IV


## Channel 1312 (1712.4MHz)

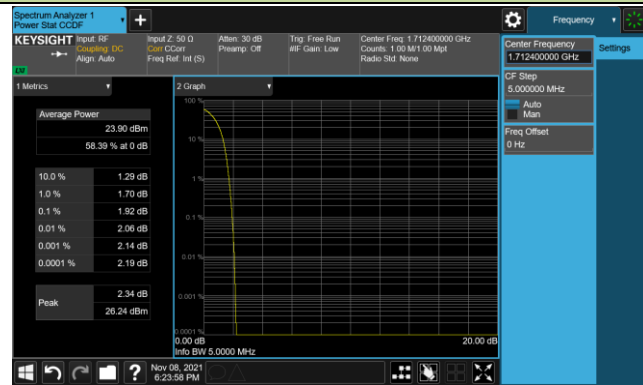

## Channel 1412 (1732.4MHz)

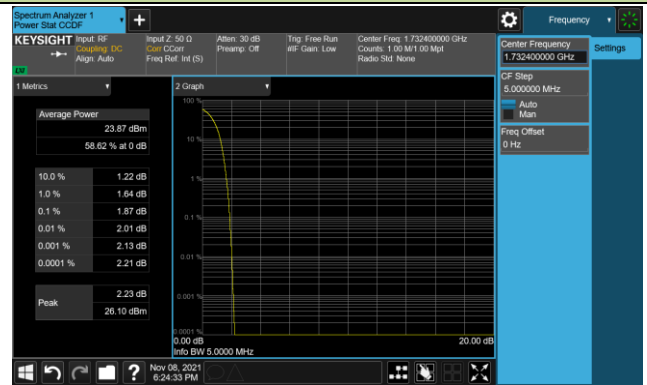


## Channel 1513 (1752.6MHz)

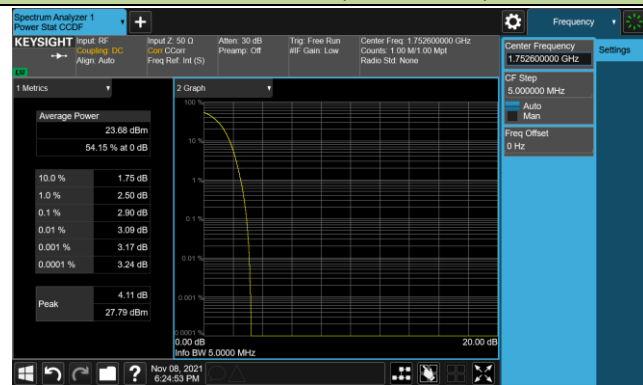




WCDMA Band V


Channel 4132 (826.4MHz)

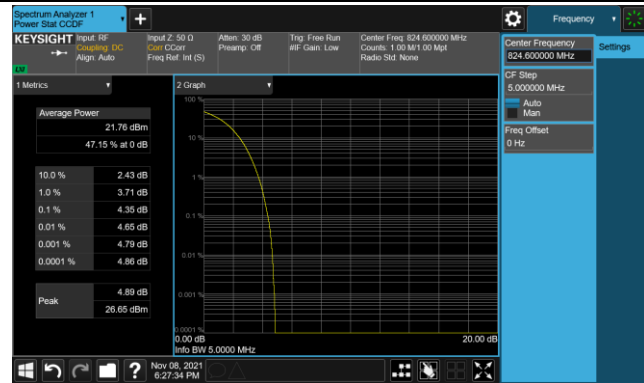

Channel 4183 (836.4MHz)

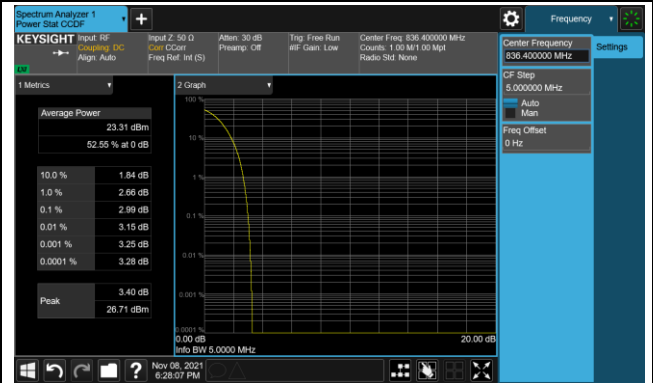

Channel 4233 (846.6MHz)

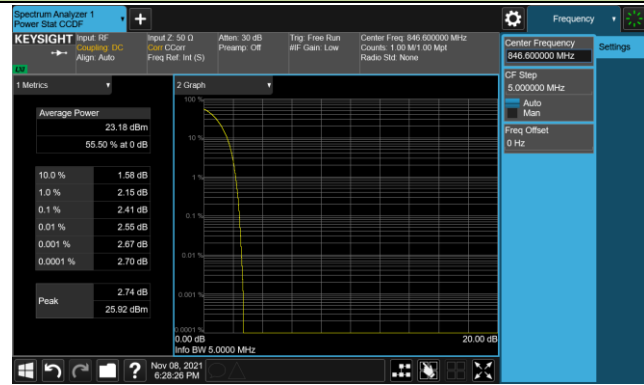

## **5.7. Conducted Spurious Emissions**

### **5.7.1. Test Limit**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the Low frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### **5.7.2. Test Procedure Used**

ANSI C63.26-2015 - Section 5.7

### **5.7.3. Test Setting**

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW  $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.7.4. Test Setup




**5.7.5. Test Result**

Test Site	WZ-SR6	Test Engineer	Candy Luo
Test Date	2021/11/08	Test Band	WCDMA Band II, IV, V

Mode	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)
WCDMA Band II	1852.4	30 ~ 20000	-29.79	≤ -13.00
	1880.0	30 ~ 20000	-30.28	≤ -13.00
	1907.6	30 ~ 20000	-30.82	≤ -13.00
WCDMA Band IV	1712.4	30 ~ 20000	-30.31	≤ -13.00
	1732.4	30 ~ 20000	-30.30	≤ -13.00
	1752.6	30 ~ 20000	-29.73	≤ -13.00
WCDMA Band V	826.4	30 ~ 10000	-30.15	≤ -13.00
	836.4	30 ~ 10000	-29.76	≤ -13.00
	846.6	30 ~ 10000	-30.50	≤ -13.00

## WCDMA Band II


## Low Channel

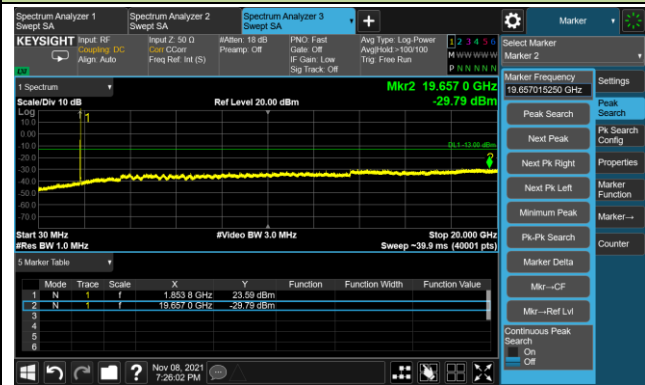

## Middle Channel




## High Channel

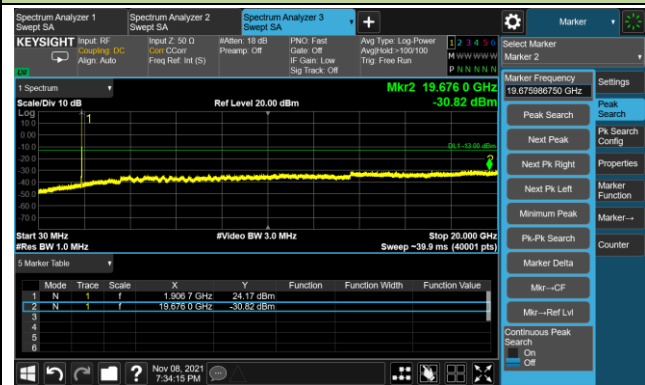


## WCDMA Band IV


## Low Channel

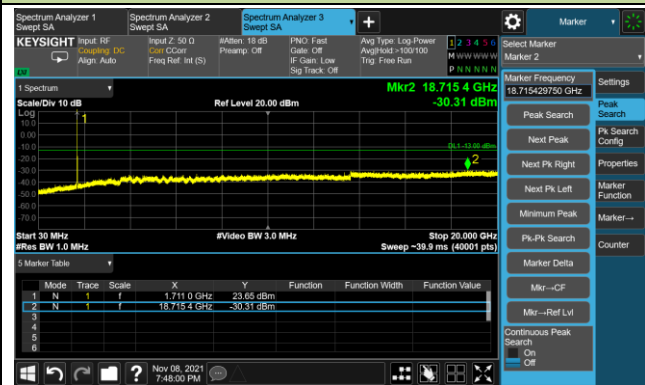

## Middle Channel

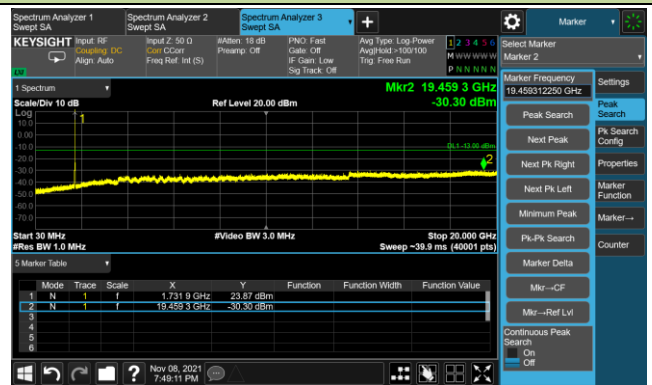


## High Channel

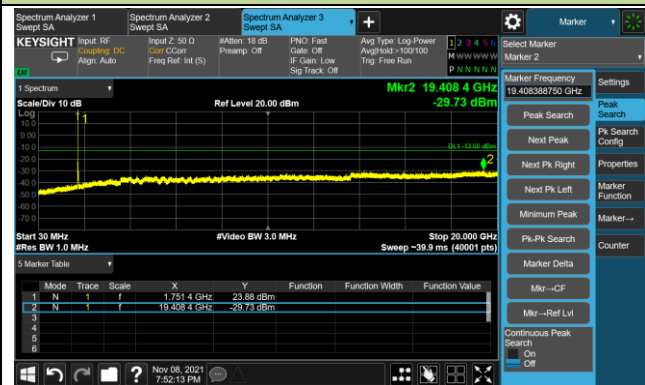

### WCDMA Band V


#### Low Channel

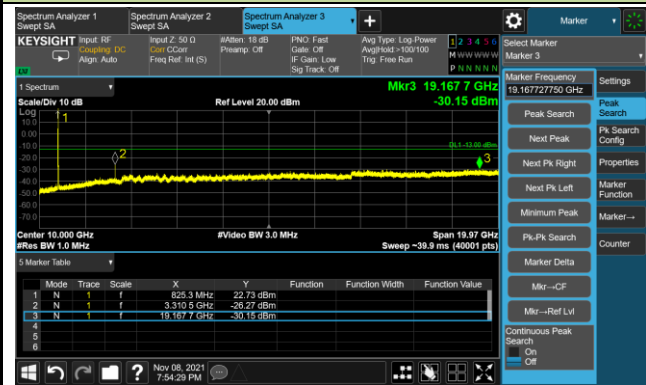

#### Middle Channel



#### High Channel

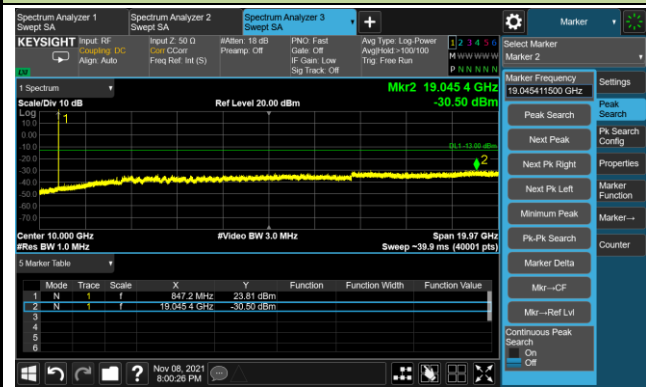

## 5.8. Radiated Spurious Emissions Measurements

### 5.8.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log D + 104.8$ ; where D is the measurement distance in meters. The emission limit equal to 82.3dB $\mu\text{V/m}$ .

### 5.8.2. Test Procedure Used


ANSI C63.26-2015 - Section 5.2.7 & 5.5

### 5.8.3. Test Setting


1. RBW = 1MHz
2. VBW  $\geq 3 \times$  RBW
3. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

### 5.8.4. Test Setup

Below 1GHz Test Setup:

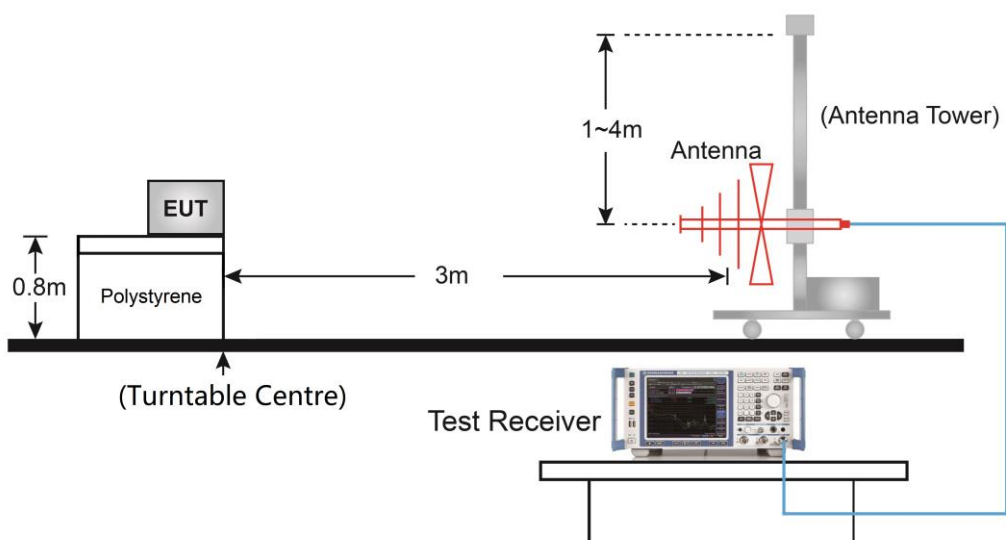

Above 1GHz Test Setup:

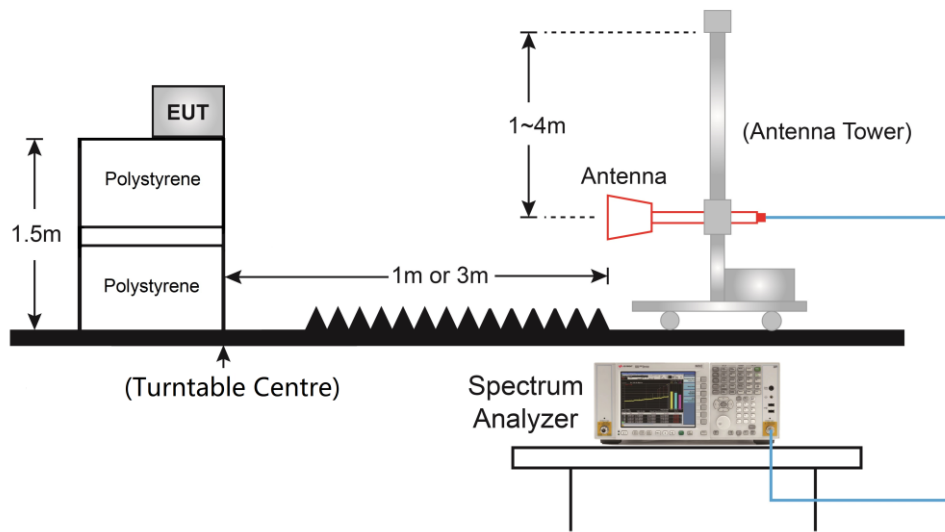



**5.8.5. Test Result**

Test Site	WZ-AC2	Test Engineer	Jason Gao
Test Date	2021/11/07 ~ 2021/11/10	Test Band	WCDMA Band II

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
59.59	3.46	17.75	21.21	82.30	-61.09	Peak	Horizontal
164.35	2.35	17.92	20.27	82.30	-62.03	Peak	Horizontal
47.46	1.56	18.78	20.34	82.30	-61.96	Peak	Vertical
152.22	2.19	18.13	20.32	82.30	-61.98	Peak	Vertical
3703.00	54.80	-9.30	45.50	82.30	-36.80	Peak	Horizontal
17456.00	39.51	12.83	52.34	82.30	-29.96	Peak	Horizontal
3703.00	54.95	-9.30	45.65	82.30	-36.65	Peak	Vertical
17456.00	39.29	12.83	52.12	82.30	-30.18	Peak	Vertical
<b>Middle Channel</b>							
47.46	2.78	18.78	21.56	82.30	-60.74	Peak	Horizontal
152.22	1.40	18.13	19.53	82.30	-62.77	Peak	Horizontal
57.65	2.97	17.97	20.94	82.30	-61.36	Peak	Vertical
157.07	1.73	18.11	19.84	82.30	-62.46	Peak	Vertical
3762.50	51.63	-9.13	42.50	82.30	-39.80	Peak	Horizontal
5938.50	48.08	-4.70	43.38	82.30	-38.92	Peak	Horizontal
3762.50	53.70	-9.13	44.57	82.30	-37.73	Peak	Vertical
17371.00	39.76	12.43	52.19	82.30	-30.11	Peak	Vertical
<b>High Channel</b>							
42.61	2.40	18.27	20.67	82.30	-61.63	Peak	Horizontal
165.32	2.03	17.87	19.90	82.30	-62.40	Peak	Horizontal
46.98	2.43	18.79	21.22	82.30	-61.08	Peak	Vertical
163.38	1.48	17.96	19.44	82.30	-62.86	Peak	Vertical
3813.50	53.53	-9.31	44.22	82.30	-38.08	Peak	Horizontal
17456.00	39.30	12.83	52.13	82.30	-30.17	Peak	Horizontal
3813.50	55.01	-9.31	45.70	82.30	-36.60	Peak	Vertical
17184.00	41.15	11.96	53.11	82.30	-29.19	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Test Site	WZ-AC2	Test Engineer	Jason Gao
Test Date	2021/11/07 ~ 2021/11/10	Test Band	WCDMA Band IV

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
59.10	1.94	17.81	19.75	82.30	-62.55	Peak	Horizontal
149.80	2.51	18.07	20.58	82.30	-61.72	Peak	Horizontal
56.68	2.84	18.06	20.90	82.30	-61.40	Peak	Vertical
158.53	3.10	18.09	21.19	82.30	-61.11	Peak	Vertical
3422.50	70.06	-11.22	58.84	82.30	-23.46	Peak	Horizontal
16861.00	41.20	11.25	52.45	82.30	-29.85	Peak	Horizontal
3431.00	62.47	-11.34	51.13	82.30	-31.17	Peak	Vertical
17379.50	40.75	12.02	52.77	82.30	-29.53	Peak	Vertical
<b>Middle Channel</b>							
45.52	1.17	18.75	19.92	82.30	-62.38	Peak	Horizontal
151.74	2.42	18.12	20.54	82.30	-61.76	Peak	Horizontal
51.83	1.74	18.37	20.11	82.30	-62.19	Peak	Vertical
151.74	2.53	18.12	20.65	82.30	-61.65	Peak	Vertical
3482.00	70.20	-11.01	59.19	82.30	-23.11	Peak	Horizontal
17456.00	39.48	12.83	52.31	82.30	-29.99	Peak	Horizontal
3482.00	66.64	-11.01	55.63	82.30	-26.67	Peak	Vertical
17345.50	40.57	11.31	51.88	82.30	-30.42	Peak	Vertical
<b>High Channel</b>							
43.10	2.05	18.39	20.44	82.30	-61.86	Peak	Horizontal
146.89	2.41	17.96	20.37	82.30	-61.93	Peak	Horizontal
48.43	2.55	18.74	21.29	82.30	-61.01	Peak	Vertical
152.22	1.95	18.13	20.08	82.30	-62.22	Peak	Vertical
3507.50	71.27	-10.79	60.48	82.30	-21.82	Peak	Horizontal
17439.00	40.67	11.41	52.08	82.30	-30.22	Peak	Horizontal
3499.00	66.37	-10.91	55.46	82.30	-26.84	Peak	Vertical
17456.00	39.80	12.83	52.63	82.30	-29.67	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Test Site	WZ-AC2	Test Engineer	Jason Gao
Test Date	2021/11/07 ~ 2021/11/10	Test Band	WCDMA Band V

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
Low Channel							
30.97	4.65	17.07	21.72	82.30	-60.58	Peak	Horizontal
938.41	1.66	30.37	32.03	82.30	-50.27	Peak	Horizontal
47.95	13.04	17.96	31.00	82.30	-51.30	Peak	Vertical
943.74	2.60	30.48	33.08	82.30	-49.22	Peak	Vertical
3303.50	71.77	-11.47	60.30	82.30	-22.00	Peak	Horizontal
16920.50	40.88	10.91	51.79	82.30	-30.51	Peak	Horizontal
3312.00	73.69	-11.47	62.22	82.30	-20.08	Peak	Vertical
17473.00	40.74	11.45	52.19	82.30	-30.11	Peak	Vertical
Middle Channel							
765.26	1.68	28.79	30.47	82.30	-51.83	Peak	Horizontal
990.79	1.36	31.13	32.49	82.30	-49.81	Peak	Horizontal
47.95	12.73	17.96	30.69	82.30	-51.61	Peak	Vertical
967.99	2.45	30.74	33.19	82.30	-49.11	Peak	Vertical
3337.50	63.61	-11.62	51.99	82.30	-30.31	Peak	Horizontal
18000.00	40.44	11.74	52.18	82.30	-30.12	Peak	Horizontal
3337.50	64.22	-11.62	52.60	82.30	-29.70	Peak	Vertical
17090.50	40.15	11.33	51.48	82.30	-30.82	Peak	Vertical
High Channel							
726.46	1.56	28.12	29.68	82.30	-52.62	Peak	Horizontal
994.67	1.25	31.16	32.41	82.30	-49.89	Peak	Horizontal
47.95	13.33	17.96	31.29	82.30	-51.01	Peak	Vertical
54.25	11.08	18.37	29.45	82.30	-52.85	Peak	Vertical
3388.50	57.41	-11.25	46.16	82.30	-36.14	Peak	Horizontal
17456.00	39.00	12.83	51.83	82.30	-30.47	Peak	Horizontal
3388.50	56.06	-11.25	44.81	82.30	-37.49	Peak	Vertical
17464.50	40.36	12.14	52.50	82.30	-29.80	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

## 6. Conclusion

The data collected relate only the item(s) tested and show that unit is compliance with FCC Rules.

\_\_\_\_\_ The End \_\_\_\_\_