



Shenzhen DEWEIMA Communication Equipment Co.,Ltd

SPECIFICATION SHEET FOR APPROVAL

CUSTOMER NAME	idata
CUSTOMER P/N	M113
PART NAME	WIFI/BT Antenna
Type	FPC antenna
APPROVAL REV.	DWM-V1.0

CONTRACTOR			DATE : 2023-10-27
QA CHECKED	ME CHECKED	RF CHECKED	MANAGER CHECKED

CUSTOMER		DATE :
Approved By	Checked By	Prepared By



Product Specification

P/N:

WIFI/BT Antenna

Rev.:

A

Page:

2/12

Content

Content.....	2
1. Product Application.....	3
2. The test environment, equipment.....	3
3. Technology Parameters.....	6
4. Engineering Drawings.....	9
5. Environmental Performance.....	10
6. Usage Precaution.....	11



Product Specification

P/N:

WIFI/BT Antenna

Rev.:

A


Page:

3/12

1. Product Application

Terminal of the antenna products can only be used for WIFI antenna.

2. The test environment, equipment

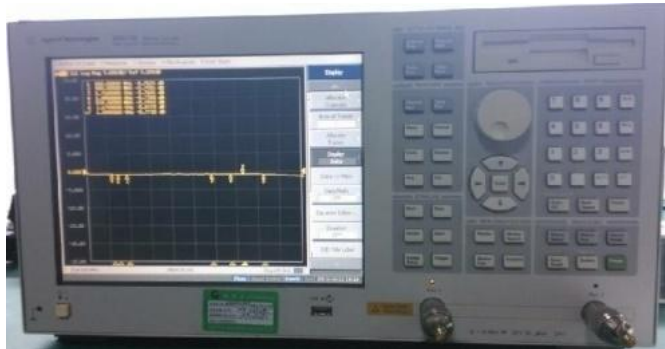Item	Description	Test Condition	Requirement
2.1	Passive testing	<p>The VSWR measurement devices are connected in sequence: Agilent5071B Network Analyzer → measurement Cable → Customer-providing Devices.</p>	<p>VSWR: 2400-2500MHz ≤ 3.0 5150-5850MHz ≤ 3.5</p>
		Test equipment	
			
Item	Description	Test Condition	
2.2	Active test	<p>The antenna is tested within the cell mainboard provided by clients. Follow picture shows the measurement condition of the antenna been put on the measurement device, which is used for all measurement of electric performances.</p>	



Product Specification

P/N:

WIFI/BT Antenna

Rev.:

A



Page:

4/12

Test equipment

2.3

Microwave
Anechoic
chamber
(Satimo&ETS
)

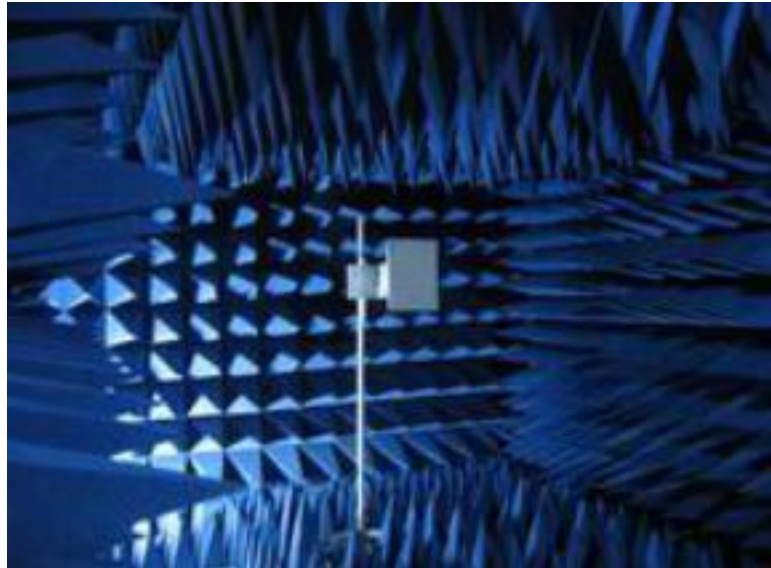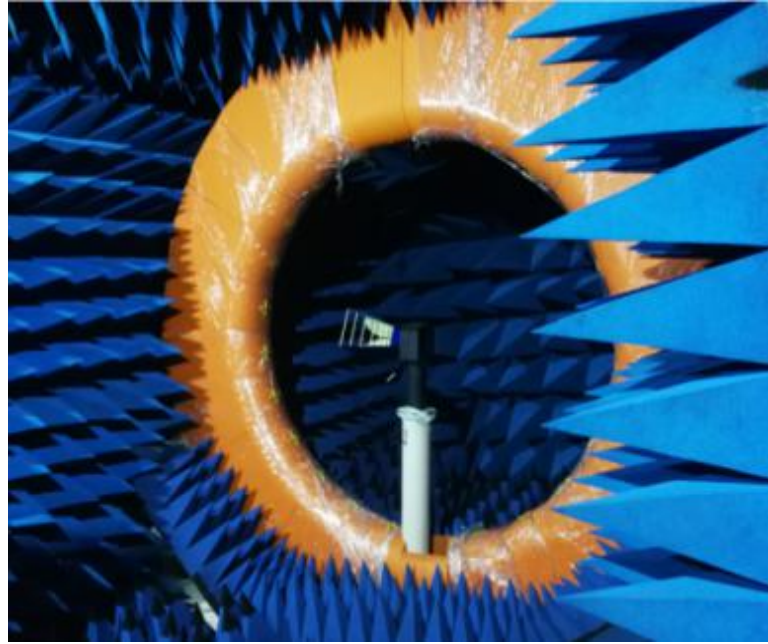



Product Specification

P/N:

WIFI/BT Antenna



Rev.:

A

Page:

5/12

2.4
CMW500
Agilent5071B
AgilentE4405B
Agilent8960

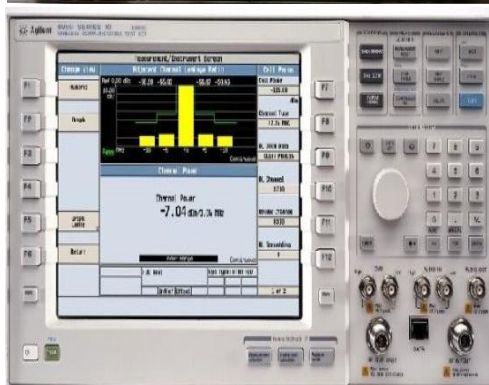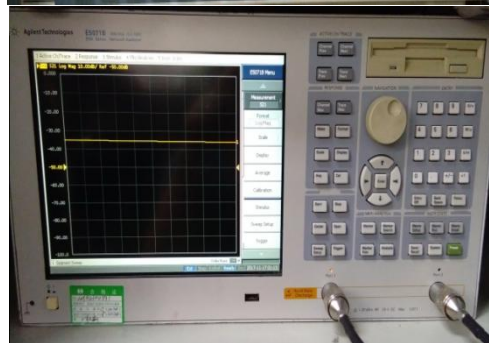



Product Specification

P/N:

WIFI/BT Antenna

Rev.:

A

Page:


6/12

3. Technology Parameters

Frequency Range: 2400MHz~2500MHz&5150MHz~5850MHz
 Operating Humidity: 85% R.H.MAX
 Temperature Rating: -40°C ~ +85°C

3.1 The matching test value

Element	Value
E1(0402)	
E2(0402)	
E3(0402)	
E4(0402)	

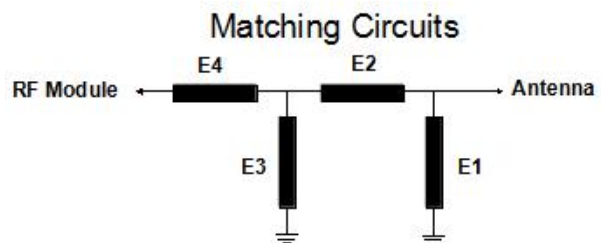

3.2 WIFI OTA Test Report

2.4G WIFI	802.11b		
	Channel	1	6
TRP	15.36	15.87	16.15
TIS	-80.89	-81.05	-81.26

5G WIFI	802.11a					
	Channel	36	44	64	149	157
TRP	14.33	14.14	12.69	10.02	11.07	11.26
TIS	-70.8	-71.23	-70.31	-70.16	-70.5	-70.97



Product Specification

P/N:

WIFI/BT Antenna

Rev.:

A

Page:

7/12

3.3 Efficiency And Gain:

Frequency/Mhz	Efficiency / dB	Efficiency / %	MaxGain/dBi	AvgGain/dBi
2400	-3.7	42.66	1.65	-4.7
2410	-3.76	42.07	1.83	-4.76
2420	-3.59	43.75	1.81	-4.59
2430	-3.54	44.26	1.53	-4.54
2440	-3.65	43.15	1.19	-4.65
2450	-3.62	43.45	1.14	-4.62
2460	-3.69	42.76	1.02	-4.69
2470	-3.92	40.55	1.08	-4.92
2480	-3.99	39.9	1.09	-4.99
2490	-4.08	39.08	1.21	-4.88
2500	-4.5	35.48	0.92	-5.2

Frequency/Mhz	Efficiency / dB	Efficiency / %	MaxGain/dBi	AvgGain/dBi
5150	-3.38	45.92	2.95	-4.38
5200	-3.44	45.29	2.18	-4.44
5250	-3.51	44.57	2.42	-4.51
5300	-3.62	43.45	2.27	-4.62
5350	-3.6	43.65	2.01	-4.6
5400	-3.72	42.46	1.85	-4.72
5450	-3.69	42.76	2.24	-4.69
5500	-3.46	45.08	2.34	-4.46
5550	-3.5	44.67	1.52	-4.5
5600	-3.55	44.16	1.98	-4.55
5650	-3.33	46.45	2.14	-4.33
5700	-3.13	48.64	2.61	-4.13
5750	-3.17	48.19	2.29	-4.17
5800	-3.12	48.75	2.8	-4.12
5850	-3.14	48.53	2.26	-4.14



Product Specification

P/N:

WIFI/BT Antenna

Rev.:


A

Page:


8/12

3.4. 3D Pattern

2.4GHz:

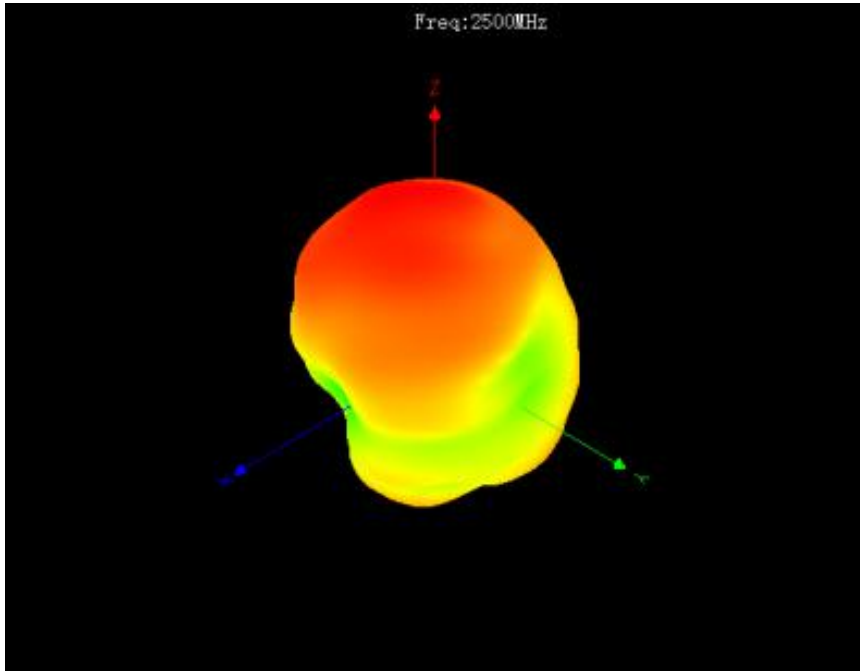

5GHz

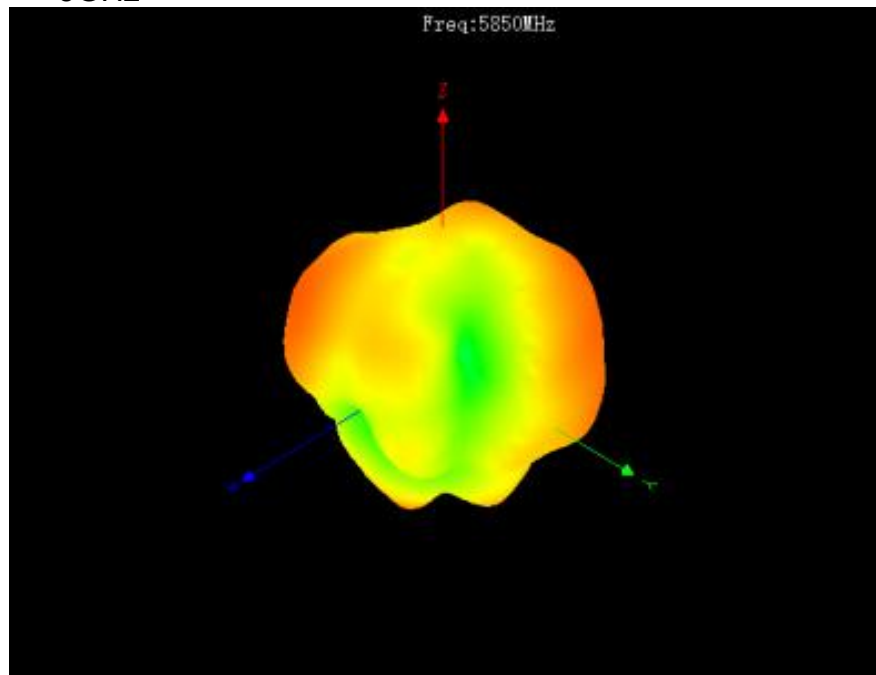



Product Specification

P/N:

WIFI/BT Antenna

Rev.:

A

Page:

10/12

5.Environmental Performance

Item	Description	Test Condition	Requirement
5.1	High and low temperature test	Temp.: -40 °C Time: 48 hours Temp.: 85°C Time: 48 hours	1. No visible damage. 2. The electric performances reach the standard.
Item	Description	Test Condition	Requirement
5.2	Salt Spray	5±0.1% Nad salt fog PH Value: 6.5-7.2 Temp: 35±1°C Time:24 hours	1. No color change. 2. the appearance of the antenna does not flake off.



Product Specification

P/N:

WIFI/BT Antenna

Rev.:

A


Page:

11/12

6.Usage Precaution

No	Items	Matter
6.1	Precautions	a)Please avoid the cleaning of this product
No	Items	Matter
6.2	Stockpile condition	Use this product within 6 months after receipt Condition : Temp: 5~30℃ Humidity:≤70%

专业的**RF**研发机构

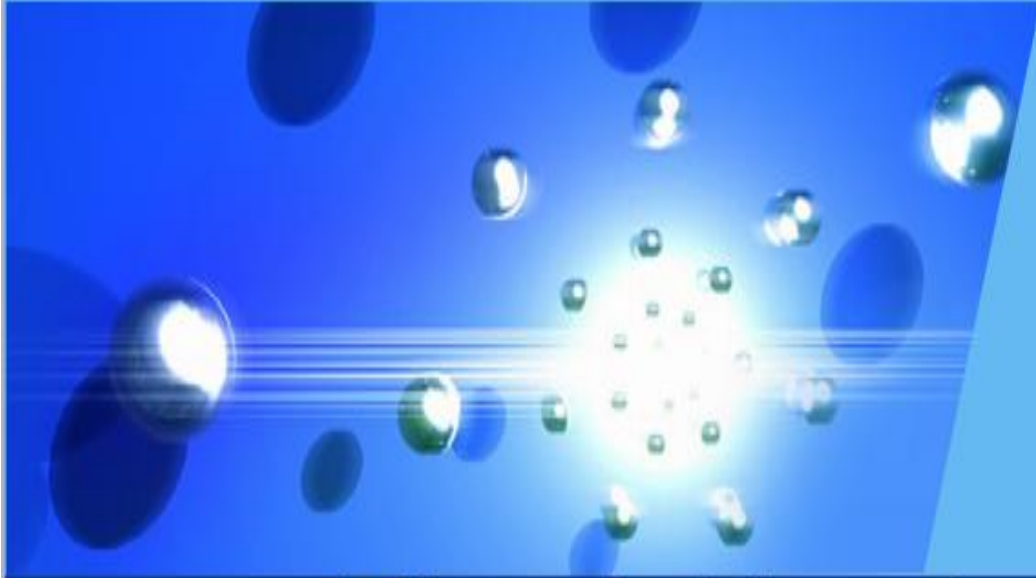

Thank You !

公司地址：深圳市宝安23区创业二路友谊大厦1栋3楼 邮编：518101
3rd Floor,first unit,Friendships Building,Chuangye 2rd Road,Baoan
23 district,Shenzhen,China Post NO:518101
TEL: 0755-27885759 FAX: 0755-27885739
E-mail: 2880181958@qq.com