

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 1 of 131

**Applicant** : Handheld Group AB  
**Address of Applicant** : Strandgatan 40, 531 60, Lidkoping, Sweden

**Product Name** : Rugged Android Tablet ALGIZ RT10  
**Model No.** : ALGIZ RT10  
**Sample acquisition Method** : Sent by Client

**Sample No.** : E22030040-01#04  
E22030040-01#05  
E22030040-01#10

**FCC ID** : YY3-ART1  
**ISED Number** : 11695A-ART10

**Standards** : FCC CFR47 Part 2  
RSS-Gen  
(Others refer to chapter 1.4)

**Date of Receipt** : 2022-06-10( E22030040-01#04, E22030040-01#05)  
2022-08-02( E22030040-01#10)  
**Date of Test** : 2022-06-10 ~ 2022-10-20  
**Date of Issue** : 2022-12-28

**Remark:**

*This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.*

Prepared by:

*Shuai Li*

(Shuai Li)

Reviewed by:

*Jennifer Zhou*

(Jennifer Zhou)

Approved by:

*Guoyou Chi*

(Authorized signatory: Guoyou Chi)

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 2 of 131

## Contents

<b>1 GENERAL INFORMATION .....</b>	<b>4</b>
1.1 TESTING LABORATORY.....	4
1.2 DETAILS OF APPLICATION .....	4
1.3 DETAILS OF EUT .....	4
1.4 TEST METHODOLOGY.....	6
1.5 TEST VERDICT .....	6
<b>2 TEST CONDITION .....</b>	<b>8</b>
2.1 ENVIRONMENTAL CONDITIONS .....	8
2.2 TEST ENVIRONMENTS .....	8
2.3 EQUIPMENT LIST .....	8
2.4 MEASUREMENT UNCERTAINTY.....	9
<b>3 TEST SET-UP AND OPERATION MODES.....</b>	<b>11</b>
3.1 DETAILS OF TEST MODE .....	11
3.2 TEST SETUP DIAGRAM .....	16
<b>4 TEST ITEMS.....</b>	<b>19</b>
4.1 TRANSMITTER RADIATED POWER (EIRP/ERP).....	19
4.1.1 <i>Limit</i> .....	19
4.1.2 <i>Test Procedures</i> .....	19
4.1.3 <i>Test Result</i> .....	20
4.2 PEAK-TO-AVERAGE RATIO .....	21
4.2.1 <i>Limit</i> .....	21
4.2.2 <i>Test Procedures</i> .....	21
4.2.3 <i>Test Result</i> .....	21
4.3 OCCUPIED BANDWIDTH.....	22
4.3.1 <i>Limit</i> .....	22
4.3.2 <i>Test Procedures</i> .....	22
4.3.3 <i>Test Result</i> .....	22
4.4 FREQUENCY STABILITY .....	23
4.4.1 <i>Limit</i> .....	23
4.4.2 <i>Test Procedures</i> .....	24
4.4.3 <i>Test Result</i> .....	24
4.5 SPURIOUS EMISSION AT ANTENNA TERMINALS.....	25
4.5.1 <i>Limit</i> .....	25
4.5.2 <i>Test Procedures</i> .....	26
4.5.3 <i>Test Result</i> .....	27
4.6 BAND EDGE .....	28
4.6.1 <i>Limit</i> .....	28

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 3 of 131

4.6.2 <i>Test Procedures</i> .....	29
4.6.3 <i>Test Result</i> .....	30
4.7 FIELD STRENGTH OF SPURIOUS RADIATION.....	31
4.7.1 <i>Limit</i> .....	31
4.7.2 <i>Test Procedures</i> .....	32
4.7.3 <i>Test Result</i> .....	33
4.8 AC POWER-LINE CONDUCTED EMISSIONS.....	34
4.8.1 <i>Limit</i> .....	34
4.8.2 <i>Test Procedures</i> .....	34
4.8.3 <i>Test Result</i> .....	34
4.9 RECEIVER SPURIOUS EMISSIONS .....	35
4.9.1 <i>Limit</i> .....	35
4.9.2 <i>Test Procedures</i> .....	36
4.9.3 <i>Test Result</i> .....	36
<b>5 TEST RESULTS.....</b>	<b>37</b>
5.1.1 <i>Transmitter Radiated Power (EIRP/ERP)</i> .....	37
5.1.2 <i>Peak to Average Ratio</i> .....	81
5.1.3 <i>Occupied Bandwidth</i> .....	86
5.1.4 <i>Frequency Stability</i> .....	94
5.1.5 <i>Spurious Emission at Antenna Terminals</i> .....	103
5.1.6 <i>Band Edge</i> .....	111
5.1.7 <i>Field Strength of Spurious Radiation</i> .....	120
5.1.8 <i>AC Power-line Conducted Emissions</i> .....	123
5.1.9 <i>Receiver Spurious Emissions</i> .....	125
<b>6 PHOTOS .....</b>	<b>129</b>
6.1 <i>PHOTOGRAPHS OF THE SAMPLE</i> .....	129
6.2 <i>SET-UP FOR CONDUCTED EMISSIONS</i> .....	130
6.3 <i>SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT</i> .....	130
6.4 <i>SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHz</i> .....	131
6.5 <i>SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHz</i> .....	131

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 4 of 131

## 1 General Information

### 1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298 Pingan Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

### 1.2 Details of Application

Company Name	Handheld Group AB
Address	Strandgatan 40, 531 60, Lidkoping, Sweden
Contact Person	Johan Hed
Telephone	+46510547170
Email	regulatory@handheldgroup.com
Manufacturer Company Name	Handheld Group AB
Address	Strandgatan 40, 531 60, Lidkoping, Sweden
Factory Company Name	Hangzhou Ymir Enterprise Co., Ltd
Address	356 Hongda Road, Xiaoshan Economic and Technological Development Zone, Hangzhou

### 1.3 Details of EUT

Product Name	Rugged Android Tablet ALGIZ RT10	
Brand Name	Handheld	
Test Model No.	ALGIZ RT10	
FCC ID	YY3-ART10	
ISED Number	11695A-ART10	
Mode of Operation	GPRS/EDGE 850/1900 CDMA/EVDO BC0 WCDMA/HSDPA/HSUPA Band II/IV/V LTE FDD Band 2/4/5/7/12 LTE TDD Band 38/41 LTE CA Uplink (UL): CA_38C NR:n41	
Modulation Type	GPRS	GMSK
	EGPRS	8PSK
	WCDMA	QPSK
	HSDPA/HSUPA	QPSK 16QAM

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 5 of 131

	LTE	QPSK
		16QAM
	NR	DFT-S-OFDM: PI/2 BPSK/QPSK/16QAM/64QAM/256QAM
		CP-OFDM: QPSK/16QAM/64QAM/256QAM
<b>SCS and Channel Bandwidths for NR</b>	n41_SCS 30kHz: 20MHz 30MHz 40MHz 50MHz 60MHz 80MHz 90MHz 100MHz	
<b>Power Class</b>	GPRS 850: 4 GPRS 1900: 1 EDGE 850/1900: E2 CDMA/EVDO :3 WCDMA/HSDPA/HSUPA Band II: 3 WCDMA/HSDPA/HSUPA Band IV: 3 WCDMA/HSDPA/HSUPA Band V: 3 LTE FDD Band 2: 3 LTE FDD Band 4: 3 LTE FDD Band 5: 3 LTE FDD Band 7: 3 LTE FDD Band 12: 3 LTE TDD Band 38: 3 LTE TDD Band 41: 3 NR TDD Band n41: 3	
<b>Multislot Class</b>	GPRS/EDGE: 12	
<b>Antenna Type</b>	Internal Antenna	
<b>Antenna Gain</b>	GPRS/EDGE 850: 0.98 dBi(ANT 0) GPRS/EDGE 1900: 1.59 dBi(ANT 0) CDMA/EVDO BC0: 0.98 dBi(ANT 0) WCDMA/HSDPA/HSUPA Band II: 1.59 dBi(ANT 0) WCDMA/HSDPA/HSUPA Band IV: -1.96 dBi(ANT 0) WCDMA/HSDPA/HSUPA Band V: 0.98 dBi(ANT 0) LTE FDD Band 2: 1.59 dBi(ANT 0) LTE FDD Band 4: -1.96 dBi(ANT 0) LTE FDD Band 5: 0.98 dBi(ANT 0) LTE FDD Band 7: 3.26 dBi(ANT 0) LTE FDD Band 12: 1.78 dBi(ANT 0) LTE TDD Band 38: 2.94 dBi(ANT 0) LTE TDD Band 41: 3.26 dBi(ANT 0) NR TDD Band n41: 3.93 dBi(ANT 5)	
<b>Extreme Temperature Range</b>	-10°C ~ +55°C	
<b>Hardware version</b>	V1.4	
<b>Software version</b>	ALGIZ_RT10_V1.0	

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 6 of 131

Test SW Version	BL410_R;BL410_E
-----------------	-----------------

## 1.4 Test Methodology

47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
47 CFR Part 22 Subpart H	Public Mobile Services
47 CFR Part 24 Subpart E	Personal Communications Services
47 CFR Part 27	Miscellaneous Wireless Communications Services
RSS-Gen	General Requirements and Information for the Certification of Radio Apparatus
RSS-130	Equipment Operating in the Frequency Bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz
RSS-132	Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz
RSS-133	2 GHz Personal Communications Services
RSS-139	Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz
RSS-199	Broadband Radio Service (BRS) Equipment Operating in the Band 2500-2690 MHz
ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI C63.26:2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
KDB 971168 D01 v03	Measurement Guidance for Certification of Licensed Digital Transmitters

### Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

## 1.5 Test Verdict

No.	FCC Part No.	ISED Part No.	Description	Test Result	Verdict
1	2.1046	RSS-Gen 6.12 RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Conducted RF Output Power	Reporting Only Clause 5.1.1	PASS
2	2.1046 22.913 24.232 27.50	RSS-Gen 6.12 RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5	Effective (Isotropic) Radiated Power	Clause 5.1.1	PASS

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 7 of 131

		RSS-199 4.4			
3	2.1046 24.232(d) 27.50(d)	RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Peak to Average Radio	Clause 5.1.2	PASS
4	2.1049 22.917 24.238 27.53	RSS-Gen 6.6	Occupied Bandwidth	Clause 5.1.3	PASS
5	2.1055 22.355 24.235 27.54	RSS-Gen 6.11 RSS-130 4.3 RSS-132 5.3 RSS-133 6.3 RSS-139 6.4 RSS-199 4.3	Frequency Stability	Clause 5.1.4	PASS
6	2.1051 22.917 24.238 27.53	RSS-Gen 6.13 RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Spurious Emission at Antenna Terminals	Clause 5.1.5	PASS
7	2.1051 22.917 24.238 27.53	RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Band Edge	Clause 5.1.6	PASS
8	2.1051 22.917 24.238 27.53	RSS-Gen 6.13 RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Field Strength of Spurious Radiation	Clause 5.1.7	PASS
9	N/A	RSS-Gen 8.8	AC Power-Line Conducted Emissions	Clause 5.1.8	PASS
10	N/A	RSS-Gen 7 RSS-132 5.6 RSS-133 6.6	Receiver Spurious Emissions	Clause 5.1.9	PASS

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 8 of 131

## 2 Test Condition

### 2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

### 2.2 Test Environments

During the measurement, the environmental conditions were within the listed ranges:

Test Voltage	NV (Normal Voltage)	3.80 V
	LV (Low Voltage)	3.40 V
	HV (High Voltage)	4.35 V
Test Temperature	NT (Normal Temperature)	+25 °C
	LT (Low Temperature)	-10 °C
	HT (High Temperature)	+55 °C

### 2.3 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY54101709	2022-08-02	2023-08-01
Spectrum Analyzer	Keysight	N9020B	MY59260184	2022-08-02	2023-08-01
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2022-06-10	2023-06-09
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2022-06-10	2023-06-09
EMI Test Receiver	Rohde & Schwarz	ESR7	101911	2022-06-10	2023-06-09
V-network	SCHWARZBECK	NSLK8127	8127-902	2022-06-10	2023-06-09
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	100687	2022-08-02	2023-08-01
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	150835	2022-08-02	2023-08-01
5G Comprehensive Tester	StartPoint	SP9500	19168	2021-08-13	2023-08-12
DC Power Supply	ITECH	IT6952A	N/A	2022-06-07	2024-06-06
Temperature Chamber	ESPEC	ECT-2	055239A	2022-12-29	2023-12-28
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2021-06-08	2023-06-07
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2021-06-08	2023-06-07

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 9 of 131

Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2022-06-10	2023-06-09
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2021-06-12	2024-06-11
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2022-06-10	2023-06-09
Shielded Room 8*5*4 (L*W*H)	CHANGNING	854	N/A	2022-06-10	2023-06-09
Test Software	BL	BL410_E	N/A	N/A	N/A
Test Software	BL	BL410_R	N/A	N/A	N/A

## 2.4 Measurement Uncertainty

FCC Part No.	ISED Part No.	Description	Uncertainty
2.1046	RSS-Gen 6.12 RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Conducted RF Output Power	±0.69dB
2.1046 24.232(d) 27.50(d)	RSS-130 4.4 RSS-132 5.4 RSS-133 6.4 RSS-139 6.5 RSS-199 4.4	Peak to Average Radio	±0.015%
2.1049 22.917 24.238 27.53	RSS-Gen 6.6	Occupied Bandwidth	±30kHz
2.1055 22.355 24.235 27.54	RSS-Gen 6.11 RSS-130 4.3 RSS-132 5.3 RSS-133 6.3 RSS-139 6.4 RSS-199 4.3	Frequency Stability	±12Hz
2.1051 22.917 24.238 27.53	RSS-Gen 6.13 RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Spurious Emission at Antenna Terminals	±2.84dB
2.1051 22.917 24.238 27.53	RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6	Band Edge	±2.84dB

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 10 of 131

	RSS-199 4.5		
2.1051 22.917 24.238 27.53	RSS-Gen 6.13 RSS-130 4.6 RSS-132 5.5 RSS-133 6.5 RSS-139 6.6 RSS-199 4.5	Field Strength of Spurious Radiation	±5.00dB
N/A	RSS-Gen 8.8	AC Power-Line Conducted Emissions	±2.68 dB
N/A	RSS-Gen 7 RSS-132 5.6 RSS-133 6.6	Receiver Spurious Emissions	±5.00dB

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 11 of 131

## 3 Test Set-up and Operation Modes

### 3.1 Details of Test Mode

Test Item	Test Mode	Test Channel		
		LCH	MCH	HCH
Effective (Isotropic) Radiated Power	GPRS 850	v	v	v
	GPRS 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
	HSDPA Band II	v	v	v
	HSDPA Band IV	v	v	v
	HSDPA Band V	v	v	v
	HSUPA Band II	v	v	v
Peak to Average Radio	HSUPA Band IV	v	v	v
	HSUPA Band V	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
	WCDMA Band II	v	v	v
Occupied Bandwidth	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
	GPRS 850	v	v	v
	GPRS 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
	WCDMA Band II	v	v	v
Frequency Stability	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
	GPRS 850	v	v	v
	GPRS 1900	v	v	v

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 12 of 131

Spurious Emission at Antenna Terminals	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
Band Edge	GPRS 850	v	v	v
	GPRS 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
Field Strength of Spurious Radiation	GPRS 850	v	-	v
	GPRS 1900	v	-	v
	EDGE 850	v	-	v
	EDGE 1900	v	-	v
	CDMA BC0	v	-	v
	EVDO BC0	v	-	v
	WCDMA Band II	v	-	v
	WCDMA Band IV	v	-	v
	WCDMA Band V	v	-	v
AC Power-Line Conducted Emissions	GPRS 850	v	v	v
	GPRS 1900	v	v	v
	EDGE 850	v	v	v

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 13 of 131

Receiver Spurious Emissions	EDGE 1900	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v
	WCDMA Band II	v	v	v
	WCDMA Band IV	v	v	v
	WCDMA Band V	v	v	v
	GPRS 850	v	v	v
	GPRS 1900	v	v	v
	EDGE 850	v	v	v
	EDGE 1900	v	v	v
	CDMA BC0	v	v	v
	EVDO BC0	v	v	v

**Note(s):**

The mark 'v' means that this configuration is chosen for testing.

Test Item	LTE Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	LCH	MCH	HCH
Effective (Isotropic) Radiated Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	n	n	v	v	v	v	v	v	v	v
	7	n	n	v	v	v	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	n	n	v	v	v	v	v	v	v	v
	38	n	n	v	v	v	v	v	v	v	v	v	v	v	v
	41	n	n	v	v	v	v	v	v	v	v	v	v	v	v
Peak to Average Radio	2	--	--	--	--	--	v	v	v	v	--	v	v	v	v
	4	--	--	--	--	--	v	v	v	v	--	v	v	v	v
	5	--	--	--	v	n	n	v	v	v	--	v	v	v	v
	7	n	n	--	--	--	v	v	v	v	--	v	v	v	v
	12	--	--	--	v	n	n	v	v	v	--	v	v	v	v
	38	n	n	--	--	--	v	v	v	v	--	v	v	v	v
	41	n	n	--	--	--	v	v	v	v	--	v	v	v	v
Occupied Bandwidth	2	v	v	v	v	v	v	v	v	--	--	v	v	v	v
	4	v	v	v	v	v	v	v	v	--	--	v	v	v	v
	5	v	v	v	v	n	n	v	v	--	--	v	v	v	v
	7	n	n	v	v	v	v	v	v	--	--	v	v	v	v
	12	v	v	v	v	n	n	v	v	--	--	v	v	v	v

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 14 of 131

	38	n	n	v	v	v	v	v	v	--	--	v	v	v	v
	41	n	n	v	v	v	v	v	v	--	--	v	v	v	v
Frequency Stability	2	--	--	--	v	--	--	v	v	--	--	v	--	v	--
	4	--	--	--	v	--	--	v	v	--	--	v	--	v	--
	5	--	--	--	v	n	n	v	v	--	--	v	--	v	--
	7	n	n	--	v	--	--	v	v	--	--	v	--	v	--
	12	n	n	--	v	n	n	v	v	--	--	v	--	v	--
	38	n	n	--	v	--	--	v	v	--	--	v	--	v	--
	41	n	n	--	v	--	--	v	v	--	--	v	--	v	--
	2	v	v	v	v	v	v	v	v	v	--	--	v	v	v
Spurious Emission at Antenna Terminals	4	v	v	v	v	v	v	v	v	v	--	--	v	v	v
	5	v	v	v	v	n	n	v	v	v	--	--	v	v	v
	7	n	n	v	v	v	v	v	v	v	--	--	v	v	v
	12	v	v	v	v	n	n	v	v	v	--	--	v	v	v
	38	n	n	v	v	v	v	v	v	v	--	--	v	v	v
	41	n	n	v	v	v	v	v	v	v	--	--	v	v	v
	2	v	v	v	v	v	v	v	v	v	v	v	v	--	v
Band Edge	4	v	v	v	v	v	v	v	v	v	v	v	v	--	v
	5	v	v	v	v	n	n	v	v	v	v	v	v	--	v
	7	n	n	v	v	v	v	v	v	v	v	v	v	--	v
	12	v	v	v	v	n	n	v	v	v	v	v	v	--	v
	38	n	n	v	v	v	v	v	v	v	v	v	v	--	v
	41	n	n	v	v	v	v	v	v	v	v	v	v	--	v
	2	v	v	v	v	v	v	v	v	--	v	--	--	v	--
Field Strength of Spurious Radiation	4	v	v	v	v	v	v	v	v	--	v	--	--	v	--
	5	v	v	v	v	n	n	v	v	--	v	--	--	v	--
	7	n	n	v	v	v	v	v	v	--	v	--	--	v	--
	12	v	v	v	v	n	n	v	v	--	v	--	--	v	--
	38	n	n	v	v	v	v	v	v	--	v	--	--	v	--
	41	n	n	v	v	v	v	v	v	--	v	--	--	v	--

**Note(s):**

The mark 'v' means that this configuration is chosen for testing.

The mark 'n' means that this bandwidth is not supported.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 15 of 131

Test Item	5G NR	SCS (kHz)	Bandwidth (MHz)										Modulation Type		Test Channel		
			DFT-S-OFDM										PI/2 BPSK	QP SK			
			10	15	20	30	40	50	60	80	90	100	L	M	H		
Effective (Isotropic)Radiated Power	41	30	n	n	v	-	-	-	v	-	-	v	v	v	v	v	v
Peak to Average Radio	41	30	n	n	-	-	-	-	-	-	-	v	v	v	v	v	v
Occupied Bandwidth	41	30	n	n	v	-	-	-	v	-	-	v	v	v	v	v	v
Frequency Stability	41	30	n	n	-	-	-	-	-	-	-	v	v	v	-	v	-
Spurious Emission at Antenna Terminals	41	30	n	n	v	-	-	-	v	-	-	v	v	v	v	v	v
Band Edge	41	30	n	n	v	-	-	-	v	-	-	v	v	v	v	-	v
Field Strength of Spurious Radiation	41	30	n	n	v	-	-	-	v	-	-	v	v	v	v	v	v

**Note(s):**

1. The mark 'v' means that this configuration is chosen for testing.
2. The mark 'n' means that this bandwidth is not supported.

# TEST REPORT


Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 16 of 131

## 3.2 Test Setup Diagram

Diagram of Measurement Equipment Configuration for Antenna Port Test

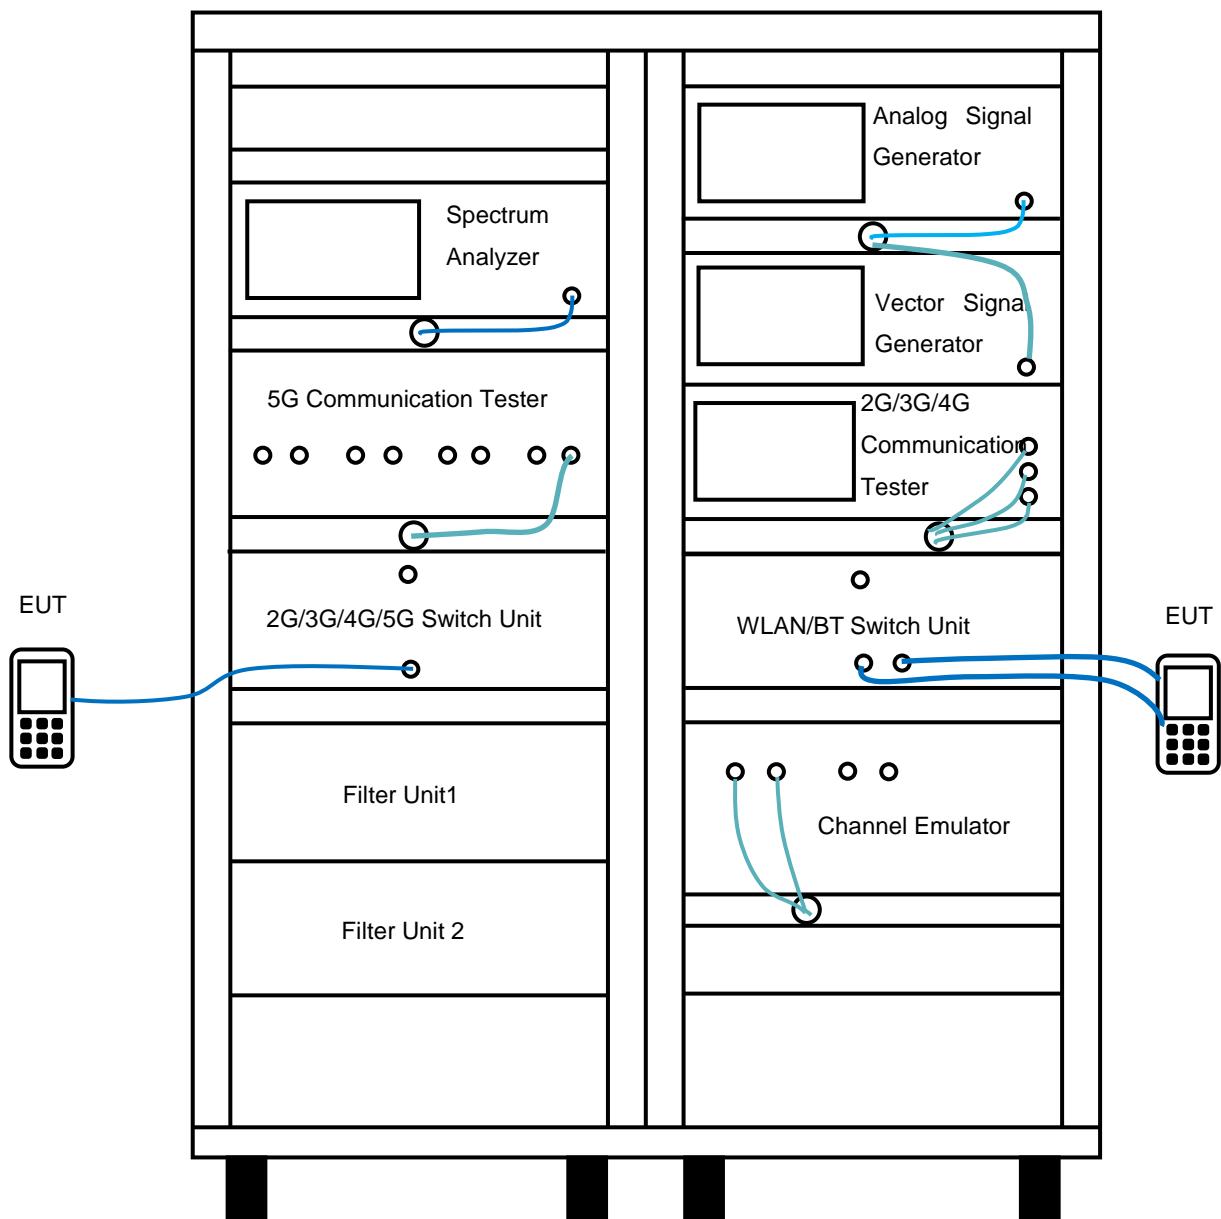



# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 17 of 131

## Diagram of Measurement Configuration for Radiation Test

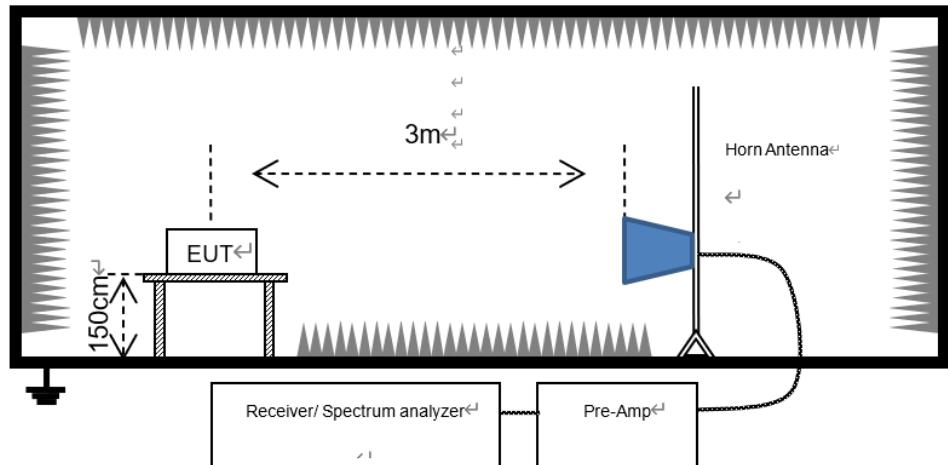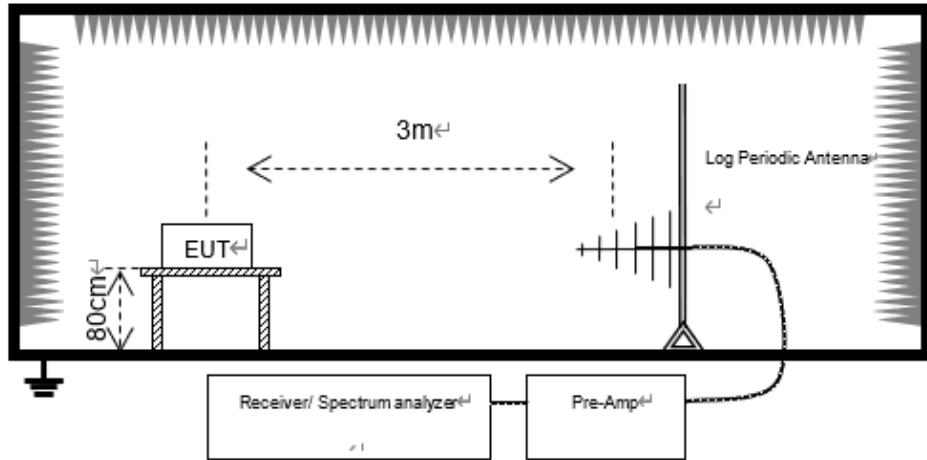

Note: Measurements below 1GHz are done with a table height of 0.8m and above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.


# TEST REPORT

Report No.: SHE22030040-02CE


Date: 2022-12-28

Page 18 of 131

**Diagram of Measurement Configuration for Frequency Stability**

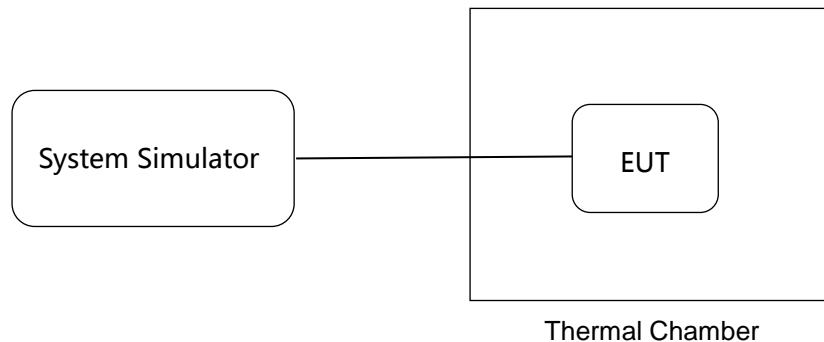

**Diagram of Measurement Equipment Configuration for Conduction Measurement**

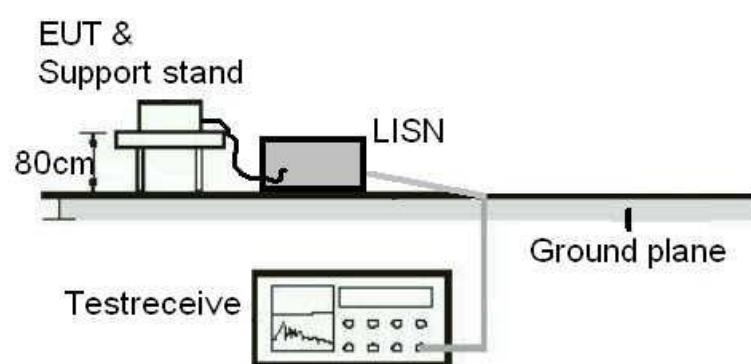

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 19 of 131

## 4 Test Items

### 4.1 Transmitter Radiated Power (EIRP/ERP)

#### 4.1.1 Limit

**FCC § 2.1046(a) & 22.913(a) & 24.232(c) & 27.50(b) & 27.50(c) & 27.50(d) & 27.50(h)**

According to FCC section 22.913(a) (2), the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC section 24.232(c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to FCC section 27.50(b) (10), portable stations (hand-held devices) transmitting in the 746-757MHz, 776-788MHz, and 805-806MHz bands are limited to 3 watts ERP.

FCC section 27.50(c) (10), portable stations (hand-held devices) in the 698-746MHz band are limited to 3 watts ERP.

FCC section 27.50(d) (4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP.

And FCC section 27.50(h) (2), for mobile and other user stations, mobile stations are limited to 2 watts EIRP. All user stations are limited to 2 watts transmitter output power.

#### RSS-132 § 5.4 & RSS-133 § 6.4 & RSS-139 § 6.5 & RSS-199 § 4.4

According to RSS-132 § 5.4, the Effective Radiated Power (ERP) for mobile equipment shall not exceed 11.5 watts.

According to RSS-133 § 6.4 (SRSP 510), mobile stations and hand-held portables are limited to 2 watts maximum EIRP.

According to RSS-139 § 6.5, the EIRP for mobile and portable transmitters shall not exceed 1 watt.

According to RSS-199 § 4.4, for mobile subscriber equipment, the EIRP shall not exceed 2 watts.

#### 4.1.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 20 of 131

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{EIRP} = P_T + G_T - L_C$$

$$\text{ERP} = \text{EIRP} - 2.15$$

Where:

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP} = \text{SA Read Value} + \text{Correction Factor}$$

where:

ERP/EIRP = effective or equivalent radiated power in dBm

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer in dBm

Correction Factor = total correction factor including cable loss in dB

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

## 4.1.3 Test Result

Please refer to 5.1.1.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 21 of 131

## 4.2 Peak-to-Average Ratio

### 4.2.1 Limit

**FCC § 2.1046 & 24.232(d) & 27.50(d)**

**RSS-132 § 5.4 & RSS-133 § 6.4 & RSS-139 § 6.5 & RSS-199 § 4.4**

In addition, when the transmitter power is measured in terms of average value, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with 24.232 (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

For FCC section 24.232(e), peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an RMS equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to FCC section 27.50(d), in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

### 4.2.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

### 4.2.3 Test Result

Please refer to 5.1.2.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 22 of 131

## 4.3 Occupied Bandwidth

### 4.3.1 Limit

FCC § 2.1049

RSS-Gen § 6.6

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and on above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

### 4.3.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

### 4.3.3 Test Result

Please refer to 5.1.3.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 23 of 131

## 4.4 Frequency Stability

### 4.4.1 Limit

FCC § 2.1055 & 22.355 & 24.235 &27.54

RSS-Gen § 6.11 & RSS-132 § 5.3 & RSS-133 § 6.3 & RSS-139 § 6.4 & RSS-199 § 4.3

FCC § 2.1055

The frequency stability shall be measured with variation of ambient temperature as follows:

(1) The temperature is varied from -30°C to +50°C.

(2) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10°C through the range. The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

FCC § 22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in table as below.

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

FCC § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC § 27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 24 of 131

## 4.4.2 Test Procedures

### For Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -10°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in -10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### For Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

## 4.4.3 Test Result

Please refer to 5.1.4.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 25 of 131

## 4.5 Spurious Emission at Antenna Terminals

### 4.5.1 Limit

**FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)**

**RSS-Gen § 6.13 & RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6**

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43+10\log(P)$  dB.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 26 of 131

power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

## FCC § 27.53(m) (4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40 + 10 \log P$  dB ( $-10 \text{ dBm}$ ,  $100 \text{ nW}$ ) on all frequencies between the channel edge and 5 MHz from the channel edge.  
 $43 + 10 \log P$  dB ( $-13 \text{ dBm}$ ,  $50 \text{ nW}$ ) on all frequencies between 5 MHz and X MHz from the channel edge,  
 $55 + 10 \log P$  dB ( $-25 \text{ dBm}$ ,  $3 \text{ nW}$ ) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## 4.5.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. CMW500 is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10 \log (P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10 \log (P)]$  (dB)  
 $= [30 + 10 \log (P)]$  (dBm) -  $[43 + 10 \log (P)]$  (dB)  
 $= -13 \text{ dBm}$ .

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 27 of 131

11. For Band 7/41

The limit line is derived from  $55 + 10\log(P)$  dB below the transmitter power  $P$  (Watts)  
=  $P(W) - [55 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[55 + 10\log(P)]$  (dB)  
= -25 dBm.

## 4.5.3 Test Result

Please refer to 5.1.5.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 28 of 131

## 4.6 Band Edge

### 4.6.1 Limit

**FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)**

**RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6**

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

**FCC § 22.917(a) & 24.238(a)**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB. This is calculated to be -13 dBm.

**FCC § 27.53(c)**

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

**FCC § 27.53(g)**

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43+10\log(P)$  dB.

**FCC § 27.53(h) (1)**

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 29 of 131

power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

## FCC § 27.53(m) (4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40 + 10 \log P$  dB ( $-10 \text{ dBm}$ ,  $100 \text{ nW}$ ) on all frequencies between the channel edge and 5 MHz from the channel edge.  
 $43 + 10 \log P$  dB ( $-13 \text{ dBm}$ ,  $50 \text{ nW}$ ) on all frequencies between 5 MHz and X MHz from the channel edge,  
 $55 + 10 \log P$  dB ( $-25 \text{ dBm}$ ,  $3 \text{ nW}$ ) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## 4.6.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10 \log (P)$  dB below the transmitter power P(Watts)

$$\begin{aligned} &= P(W) - [43 + 10 \log(P)] \text{ (dB)} \\ &= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)} = -13 \text{ dBm.} \end{aligned}$$

9. For LTE Band 7/41, the other 40 dB, and 55 dB have additionally applied same calculation above.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 30 of 131

## 4.6.3 Test Result

Please refer to 5.1.6.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 31 of 131

## 4.7 Field Strength of Spurious Radiation

### 4.7.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m)

RSS-Gen § 6.13 & RSS-132 § 5.5 & RSS-133 § 6.5 & RSS-139 § 6.6

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43+10\log(P)$  dB.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

FCC § 27.53(m) (4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 32 of 131

and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## RSS-199 § 4.5

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40 + 10 \log P$  dB ( $-10$  dBm,  $100$  nW) on all frequencies between the channel edge and  $5$  MHz from the channel edge.

$43 + 10 \log P$  dB ( $-13$  dBm,  $50$  nW) on all frequencies between  $5$  MHz and X MHz from the channel edge,

$55 + 10 \log P$  dB ( $-25$  dBm,  $3$  nW) on all frequencies more than X MHz from the channel edge, where X is the greater of  $6$  MHz or the actual emission bandwidth ( $26$  dB).

In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## 4.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with  $0.8$  meter height for frequency below  $1\text{GHz}$  and  $1.5$  meter height for frequency above  $1\text{GHz}$  respectively above ground.
3. The EUT was set  $3$  meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated  $360$  degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between  $1\text{m}$  to  $4\text{m}$  to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's  $\text{RBW} = 1\text{MHz}$ ,  $\text{VBW} = 3\text{MHz}$ , taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11.  $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. The limit line is derived from  $43 + 10 \log(P)$  dB below the transmitter power P(Watts)  
$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$
$$= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$$
$$= -13 \text{ dBm.}$$
13. For Band 7/41: The limit line is derived from  $55 + 10 \log(P)$  dB below the transmitter power P(Watts)  
$$= P(W) - [55 + 10 \log(P)] \text{ (dB)}$$

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 33 of 131

$$= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)}$$

$$= -25 \text{ dBm.}$$

## 4.7.3 Test Result

Please refer to 5.1.7.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 34 of 131

## 4.8 AC Power-line Conducted Emissions

### 4.8.1 Limit

#### Limit

#### RSS-Gen § 8.8

For AC power-line conducted emissions, both quasi-peak and average detectors having the characteristics specified in CAN/CSA-CISPR 16-1-1:15 for the 150 kHz to 30 MHz frequency range shall be employed.

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 3, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 3 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

### 4.8.2 Test Procedures

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4).
2. The EUT is connected to the power mains through a LISN which provides 50  $\Omega$ /50  $\mu$ H of coupling impedance for the measuring instrument.
3. The test frequency range is from 150 kHz to 30 MHz.
4. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors.
5. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.
6. Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation.
7. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 4.8.3 Test Result

Please refer to 5.1.8

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 35 of 131

## 4.9 Receiver Spurious Emissions

### 4.9.1 Limit

#### Limit

#### RSS-Gen § 7.3/4 & RSS-132 § 5.6 & RSS-133 § 6.6

For emissions at frequencies below 1 GHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. At frequencies above 1 GHz, measurements shall be performed using a linear average detector with a minimum resolution bandwidth of 1 MHz.

As an alternative to CISPR quasi-peak or average measurements, compliance with the emission limit can be demonstrated using measuring equipment employing a peak detector function properly adjusted for factors such as pulse desensitization, as required, with a measurement bandwidth equal to, or greater than, the applicable CISPR quasi-peak bandwidth or 1 MHz bandwidth, respectively.

#### Receiver Radiated Limits

Radiated emission measurements shall be performed with the receiver antenna connected to the receiver antenna ports. The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is higher, to at least five times the highest tunable or local oscillator frequency, whichever is higher, without exceeding 40 GHz.

Spurious emissions from receivers shall not exceed the radiated emissions limits shown in Table 2 below.

**Table 2 –Receiver radiated emissions limits**

Frequency (MHz)	Field Strength ( $\mu$ V/m at 3 metres)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

#### Receiver Conducted Limits

If the receiver has a detachable antenna of known impedance, an antenna-conducted spurious emissions measurement is permitted as an alternative to radiated measurement. However, the radiated method is preferred.

The antenna-conducted test shall be performed with the antenna disconnected and with the receiver antenna port connected to a measuring instrument having equal input impedance to that specified for the antenna. The RF cable connecting the receiver under test to the measuring instrument shall also have the same impedance

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 36 of 131

to that specified for the receiver's antenna.

The spurious emissions from the receiver at any discrete frequency, measured at the antenna port by the antenna-conducted method, shall not exceed 2 nW in the frequency range 30-1000 MHz and 5 nW above 1 GHz.

## 4.9.2 Test Procedures

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4).
2. All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.
3. An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph.
4. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

## 4.9.3 Test Result

Please refer to 5.1.9

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 37 of 131

## 5 Test Results

### 5.1.1 Transmitter Radiated Power (EIRP/ERP)

#### Conducted Power Measurement Results for GPRS/EDGE

Conducted Power (dBm)						
Band		GSM 850			GSM 1900	
Channel		Low	Mid	High	Low	Mid
GPRS	1 TX slot	29.07	28.96	29.74	27.00	27.63
	2 TX slot	28.98	28.87	29.66	26.90	27.51
	3 TX slot	28.93	28.82	29.61	26.85	27.46
	4 TX slot	28.90	28.79	29.58	26.82	27.43
EDGE	1 TX slot	24.07	24.55	24.72	24.85	25.43
	2 TX slot	24.12	24.49	24.73	24.79	25.36
	3 TX slot	24.02	24.58	24.57	24.74	25.41
	4 TX slot	24.14	24.44	24.52	24.81	25.29

#### Effective (Isotropic) Radiated Power Measurement Results for GPRS/EDGE

Band	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
GPRS 850	LCH	29.07	0.98	27.90	0.617	7	PASS
	MCH	28.96	0.98	27.79	0.601	7	PASS
	HCH	29.74	0.98	28.57	0.719	7	PASS
EGPRS 850	LCH	24.14	0.98	22.97	0.198	7	PASS
	MCH	24.58	0.98	23.41	0.219	7	PASS
	HCH	24.73	0.98	23.56	0.227	7	PASS

Band	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
GPRS 1900	LCH	27.00	1.59	28.59	0.723	2	PASS
	MCH	27.63	1.59	29.22	0.836	2	PASS
	HCH	27.20	1.59	28.79	0.757	2	PASS
EGPRS 1900	LCH	24.85	1.59	26.44	0.441	2	PASS
	MCH	25.43	1.59	27.02	0.504	2	PASS
	HCH	25.11	1.59	26.70	0.468	2	PASS

Note: For the GPRS and EGPRS mode, all slots were tested and just the worst data were recorded in this table.

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 38 of 131

## Effective (Isotropic) Radiated Power Measurement Results for CDMA/EVDO

Band	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
CDMA	LCH	23.12	0.98	21.95	0.157	7	PASS
	MCH	23.44	0.98	22.27	0.169	7	PASS
	HCH	23.39	0.98	22.22	0.167	7	PASS
CDMA	LCH	23.01	0.98	21.84	0.153	7	PASS
	MCH	23.42	0.98	22.25	0.168	7	PASS
	HCH	23.51	0.98	22.34	0.171	7	PASS
EVDO	LCH	23.13	0.98	21.96	0.157	7	PASS
	MCH	23.62	0.98	22.45	0.176	7	PASS
	HCH	23.55	0.98	22.38	0.173	7	PASS
EVDO	LCH	23.24	0.98	22.07	0.161	7	PASS
	MCH	23.62	0.98	22.45	0.176	7	PASS
	Rev.A	23.71	0.98	22.54	0.179	7	PASS

## Conducted Power Measurement Results for WCDMA/HSDPA/HSPA

WCDMA Band II	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
RMC	12.2 kbps	21.08	21.54	21.04
HSDPA	Sub - Test 1	20.09	20.59	20.04
	Sub - Test 2	20.12	20.58	20.03
	Sub - Test 3	19.58	20.08	19.58
	Sub - Test 4	19.58	20.08	19.56
HSUPA	Sub - Test 1	20.05	20.60	20.05
	Sub - Test 2	18.08	18.50	18.11
	Sub - Test 3	19.12	19.56	19.13
	Sub - Test 4	18.04	18.58	18.03
	Sub - Test 5	20.11	20.64	20.06

WCDMA Band IV	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
RMC	12.2 kbps	21.22	21.31	21.24
HSDPA	Sub - Test 1	20.22	20.34	20.24
	Sub - Test 2	20.26	20.36	20.23

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 39 of 131

	Sub - Test 3	19.72	19.86	19.72
	Sub - Test 4	19.76	19.82	19.74
HSUPA	Sub - Test 1	20.17	20.32	20.26
	Sub - Test 2	18.19	18.34	18.20
	Sub - Test 3	19.26	19.39	19.17
	Sub - Test 4	18.23	18.35	18.27
	Sub - Test 5	20.28	20.35	20.23

WCDMA Band V	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
RMC	12.2 kbps	21.53	21.95	22.11
HSDPA	Sub - Test 1	20.58	20.95	21.12
	Sub - Test 2	20.59	20.97	21.10
	Sub - Test 3	20.06	20.46	20.63
	Sub - Test 4	20.07	20.46	20.61
HSUPA	Sub - Test 1	20.58	20.96	21.15
	Sub - Test 2	18.59	18.95	19.14
	Sub - Test 3	19.56	19.96	20.15
	Sub - Test 4	18.62	18.95	19.04
	Sub - Test 5	20.57	20.97	21.04

## Effective (Isotropic) Radiated Power Measurement Results for WCDMA/HSDPA/HSUPA

Band	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
WCDMA Band II	LCH	21.08	1.59	22.67	0.185	2	PASS
	MCH	21.54	1.59	23.13	0.206	2	PASS
	HCH	21.04	1.59	22.63	0.183	2	PASS
HSDPA Band II	LCH	20.12	1.59	21.71	0.148	2	PASS
	MCH	20.59	1.59	22.18	0.165	2	PASS
	HCH	20.04	1.59	21.63	0.146	2	PASS
HSUPA Band II	LCH	20.05	1.59	21.64	0.146	2	PASS
	MCH	20.64	1.59	22.23	0.167	2	PASS
	HCH	20.06	1.59	21.65	0.146	2	PASS

Band	Channel	Conducted Power (dBm)	Antenna Gain	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
------	---------	-----------------------	--------------	------------	----------	-----------	---------

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 40 of 131

			(dBi)				
WCDMA Band IV	LCH	21.22	-1.96	19.26	0.084	1	PASS
	MCH	21.34	-1.96	19.38	0.087	1	PASS
	HCH	21.24	-1.96	19.28	0.085	1	PASS
HSDPA Band IV	LCH	20.26	-1.96	18.30	0.068	1	PASS
	MCH	20.36	-1.96	18.40	0.069	1	PASS
	HCH	20.24	-1.96	18.28	0.067	1	PASS
HSUPA Band IV	LCH	20.28	-1.96	18.32	0.068	1	PASS
	MCH	20.35	-1.96	18.39	0.069	1	PASS
	HCH	20.26	-1.96	18.30	0.068	1	PASS

Band	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
WCDMA Band V	LCH	21.53	0.98	20.36	0.109	7	PASS
	MCH	21.95	0.98	20.78	0.120	7	PASS
	HCH	22.11	0.98	20.94	0.124	7	PASS
HSDPA Band V	LCH	20.59	0.98	19.42	0.087	7	PASS
	MCH	20.97	0.98	19.80	0.095	7	PASS
	HCH	21.12	0.98	19.95	0.099	7	PASS
HSUPA Band V	LCH	20.58	0.98	19.41	0.087	7	PASS
	MCH	20.97	0.98	19.80	0.095	7	PASS
	HCH	21.15	0.98	19.98	0.100	7	PASS

Note: For the HSDPA and HSUPA mode, all subtests were tested and just the worst data were recorded in this table.

## Effective (Isotropic) Radiated Power Measurement Results for LTE

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE Band 2									
1.4 MHz	LCH	QPSK	RB1#0	20.96	1.59	22.55	0.180	2	PASS
			RB1#3	21.00	1.59	22.59	0.182	2	PASS
			RB1#5	20.90	1.59	22.49	0.177	2	PASS
			RB3#0	20.87	1.59	22.46	0.176	2	PASS
			RB3#2	20.95	1.59	22.54	0.179	2	PASS
			RB3#3	20.84	1.59	22.43	0.175	2	PASS
			RB6#0	19.92	1.59	21.51	0.142	2	PASS
	16-QAM	RB1#0	20.06	1.59	21.65	0.146	2	PASS	
		RB1#3	20.17	1.59	21.76	0.150	2	PASS	

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 41 of 131

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict	
<b>LTE Band 2</b>										
MCH		QPSK	RB1#5	20.07	1.59	21.66	0.147	2	PASS	
			RB3#0	19.94	1.59	21.53	0.142	2	PASS	
			RB3#2	20.14	1.59	21.73	0.149	2	PASS	
			RB3#3	20.13	1.59	21.72	0.149	2	PASS	
			RB6#0	19.07	1.59	20.66	0.116	2	PASS	
	16-QAM		RB1#0	21.20	1.59	22.79	0.190	2	PASS	
			RB1#3	21.27	1.59	22.86	0.193	2	PASS	
			RB1#5	21.10	1.59	22.69	0.186	2	PASS	
			RB3#0	21.18	1.59	22.77	0.189	2	PASS	
			RB3#2	21.26	1.59	22.85	0.193	2	PASS	
			RB3#3	21.16	1.59	22.75	0.188	2	PASS	
			RB6#0	20.18	1.59	21.77	0.150	2	PASS	
HCH		QPSK	RB1#0	20.68	1.59	22.27	0.169	2	PASS	
			RB1#3	20.70	1.59	22.29	0.169	2	PASS	
			RB1#5	20.66	1.59	22.25	0.168	2	PASS	
			RB3#0	20.55	1.59	22.14	0.164	2	PASS	
			RB3#2	20.48	1.59	22.07	0.161	2	PASS	
			RB3#3	20.46	1.59	22.05	0.160	2	PASS	
			RB6#0	18.99	1.59	20.58	0.114	2	PASS	
	16-QAM		RB1#0	20.71	1.59	22.30	0.170	2	PASS	
			RB1#3	20.72	1.59	22.31	0.170	2	PASS	
			RB1#5	20.66	1.59	22.25	0.168	2	PASS	
			RB3#0	20.71	1.59	22.30	0.170	2	PASS	
			RB3#2	20.73	1.59	22.32	0.171	2	PASS	
			RB3#3	20.66	1.59	22.25	0.168	2	PASS	
			RB6#0	19.72	1.59	21.31	0.135	2	PASS	
3 MHz	LCH	QPSK	RB1#0	19.78	1.59	21.37	0.137	2	PASS	
			RB1#3	19.88	1.59	21.47	0.140	2	PASS	
			RB1#5	19.74	1.59	21.33	0.136	2	PASS	
			RB3#0	19.98	1.59	21.57	0.144	2	PASS	
			RB3#2	19.97	1.59	21.56	0.143	2	PASS	
			RB3#3	19.95	1.59	21.54	0.143	2	PASS	
			RB6#0	18.95	1.59	20.54	0.113	2	PASS	
			RB1#0	21.02	1.59	22.61	0.182	2	PASS	
			RB1#7	20.93	1.59	22.52	0.179	2	PASS	
			RB1#14	20.82	1.59	22.41	0.174	2	PASS	

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 42 of 131

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE Band 2</b>									
MCH	16-QAM		RB8#0	20.00	1.59	21.59	0.144	2	PASS
			RB8#4	20.04	1.59	21.63	0.146	2	PASS
			RB8#7	19.96	1.59	21.55	0.143	2	PASS
			RB15#0	20.01	1.59	21.60	0.145	2	PASS
			RB1#0	20.03	1.59	21.62	0.145	2	PASS
			RB1#7	20.06	1.59	21.65	0.146	2	PASS
			RB1#14	19.85	1.59	21.44	0.139	2	PASS
			RB8#0	19.19	1.59	20.78	0.120	2	PASS
			RB8#4	19.15	1.59	20.74	0.119	2	PASS
			RB8#7	19.04	1.59	20.63	0.116	2	PASS
			RB15#0	19.05	1.59	20.64	0.116	2	PASS
			RB1#0	21.33	1.59	22.92	0.196	2	PASS
			RB1#7	21.31	1.59	22.90	0.195	2	PASS
			RB1#14	21.20	1.59	22.79	0.190	2	PASS
			RB8#0	20.34	1.59	21.93	0.156	2	PASS
			RB8#4	20.27	1.59	21.86	0.153	2	PASS
			RB8#7	20.25	1.59	21.84	0.153	2	PASS
			RB15#0	20.27	1.59	21.86	0.153	2	PASS
			RB1#0	20.85	1.59	22.44	0.175	2	PASS
			RB1#7	20.99	1.59	22.58	0.181	2	PASS
			RB1#14	20.65	1.59	22.24	0.167	2	PASS
			RB8#0	19.31	1.59	20.90	0.123	2	PASS
			RB8#4	19.35	1.59	20.94	0.124	2	PASS
			RB8#7	19.22	1.59	20.81	0.121	2	PASS
			RB15#0	19.35	1.59	20.94	0.124	2	PASS
			RB1#0	20.83	1.59	22.42	0.175	2	PASS
			RB1#7	20.84	1.59	22.43	0.175	2	PASS
			RB1#14	20.69	1.59	22.28	0.169	2	PASS
			RB8#0	19.87	1.59	21.46	0.140	2	PASS
			RB8#4	19.87	1.59	21.46	0.140	2	PASS
			RB8#7	19.72	1.59	21.31	0.135	2	PASS
			RB15#0	19.84	1.59	21.43	0.139	2	PASS
			RB1#0	19.97	1.59	21.56	0.143	2	PASS
			RB1#7	19.91	1.59	21.50	0.141	2	PASS
			RB1#14	19.77	1.59	21.36	0.137	2	PASS
			RB8#0	18.84	1.59	20.43	0.110	2	PASS

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 43 of 131

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE Band 2</b>									
			RB8#4	18.87	1.59	20.46	0.111	2	PASS
			RB8#7	18.73	1.59	20.32	0.108	2	PASS
			RB15#0	18.78	1.59	20.37	0.109	2	PASS
5 MHz	LCH	QPSK	RB1#0	21.00	1.59	22.59	0.182	2	PASS
			RB1#13	20.99	1.59	22.58	0.181	2	PASS
			RB1#24	20.88	1.59	22.47	0.177	2	PASS
			RB12#0	20.05	1.59	21.64	0.146	2	PASS
			RB12#6	20.04	1.59	21.63	0.146	2	PASS
			RB12#13	19.94	1.59	21.53	0.142	2	PASS
			RB25#0	20.00	1.59	21.59	0.144	2	PASS
		16-QAM	RB1#0	20.20	1.59	21.79	0.151	2	PASS
			RB1#13	20.25	1.59	21.84	0.153	2	PASS
			RB1#24	20.17	1.59	21.76	0.150	2	PASS
			RB12#0	19.15	1.59	20.74	0.119	2	PASS
			RB12#6	19.14	1.59	20.73	0.118	2	PASS
			RB12#13	19.00	1.59	20.59	0.115	2	PASS
			RB25#0	19.05	1.59	20.64	0.116	2	PASS
MCH	QPSK	QPSK	RB1#0	21.28	1.59	22.87	0.194	2	PASS
			RB1#13	21.34	1.59	22.93	0.196	2	PASS
			RB1#24	21.24	1.59	22.83	0.192	2	PASS
			RB12#0	20.33	1.59	21.92	0.156	2	PASS
			RB12#6	20.28	1.59	21.87	0.154	2	PASS
			RB12#13	20.19	1.59	21.78	0.151	2	PASS
			RB25#0	20.22	1.59	21.81	0.152	2	PASS
	16-QAM	16-QAM	RB1#0	20.84	1.59	22.43	0.175	2	PASS
			RB1#13	20.97	1.59	22.56	0.180	2	PASS
			RB1#24	20.78	1.59	22.37	0.173	2	PASS
			RB12#0	19.46	1.59	21.05	0.127	2	PASS
			RB12#6	19.41	1.59	21.00	0.126	2	PASS
			RB12#13	19.37	1.59	20.96	0.125	2	PASS
			RB25#0	19.32	1.59	20.91	0.123	2	PASS
HCH	QPSK	QPSK	RB1#0	20.83	1.59	22.42	0.175	2	PASS
			RB1#13	20.83	1.59	22.42	0.175	2	PASS
			RB1#24	20.74	1.59	22.33	0.171	2	PASS
			RB12#0	19.89	1.59	21.48	0.141	2	PASS
			RB12#6	19.81	1.59	21.40	0.138	2	PASS

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 44 of 131

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE Band 2</b>									
10 MHz	LCH	16-QAM	RB12#13	19.78	1.59	21.37	0.137	2	PASS
			RB25#0	19.81	1.59	21.40	0.138	2	PASS
			RB1#0	20.15	1.59	21.74	0.149	2	PASS
			RB1#13	20.14	1.59	21.73	0.149	2	PASS
			RB1#24	19.95	1.59	21.54	0.143	2	PASS
			RB12#0	18.96	1.59	20.55	0.114	2	PASS
			RB12#6	18.90	1.59	20.49	0.112	2	PASS
			RB12#13	18.83	1.59	20.42	0.110	2	PASS
			RB25#0	18.78	1.59	20.37	0.109	2	PASS
MCH	LCH	QPSK	RB1#0	20.99	1.59	22.58	0.181	2	PASS
			RB1#25	20.87	1.59	22.46	0.176	2	PASS
			RB1#49	20.87	1.59	22.46	0.176	2	PASS
			RB25#0	20.04	1.59	21.63	0.146	2	PASS
			RB25#13	20.06	1.59	21.65	0.146	2	PASS
			RB25#25	20.01	1.59	21.60	0.145	2	PASS
			RB50#0	20.02	1.59	21.61	0.145	2	PASS
	16-QAM	16-QAM	RB1#0	19.90	1.59	21.49	0.141	2	PASS
			RB1#25	19.83	1.59	21.42	0.139	2	PASS
			RB1#49	19.83	1.59	21.42	0.139	2	PASS
			RB25#0	19.04	1.59	20.63	0.116	2	PASS
			RB25#13	19.04	1.59	20.63	0.116	2	PASS
			RB25#25	18.98	1.59	20.57	0.114	2	PASS
			RB50#0	19.01	1.59	20.60	0.115	2	PASS
	MCH	QPSK	RB1#0	21.22	1.59	22.81	0.191	2	PASS
			RB1#25	21.29	1.59	22.88	0.194	2	PASS
			RB1#49	21.12	1.59	22.71	0.187	2	PASS
			RB25#0	20.25	1.59	21.84	0.153	2	PASS
			RB25#13	20.27	1.59	21.86	0.153	2	PASS
			RB25#25	20.21	1.59	21.80	0.151	2	PASS
			RB50#0	20.26	1.59	21.85	0.153	2	PASS
	16-QAM	16-QAM	RB1#0	20.70	1.59	22.29	0.169	2	PASS
			RB1#25	20.80	1.59	22.39	0.173	2	PASS
			RB1#49	20.67	1.59	22.26	0.168	2	PASS
			RB25#0	19.39	1.59	20.98	0.125	2	PASS
			RB25#13	19.35	1.59	20.94	0.124	2	PASS
			RB25#25	19.32	1.59	20.91	0.123	2	PASS

# TEST REPORT

Report No.: SHE22030040-02CE

Date: 2022-12-28

Page 45 of 131

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE Band 2									
HCH	QPSK	RB50#0	RB50#0	19.27	1.59	20.86	0.122	2	PASS
			RB1#0	20.88	1.59	22.47	0.177	2	PASS
			RB1#25	20.75	1.59	22.34	0.171	2	PASS
			RB1#49	20.73	1.59	22.32	0.171	2	PASS
			RB25#0	19.87	1.59	21.46	0.140	2	PASS
			RB25#13	19.88	1.59	21.47	0.140	2	PASS
			RB25#25	19.74	1.59	21.33	0.136	2	PASS
	16-QAM	RB50#0	RB50#0	19.90	1.59	21.49	0.141	2	PASS
			RB1#0	19.99	1.59	21.58	0.144	2	PASS
			RB1#25	19.97	1.59	21.56	0.143	2	PASS
			RB1#49	19.73	1.59	21.32	0.136	2	PASS
			RB25#0	19.05	1.59	20.64	0.116	2	PASS
			RB25#13	19.00	1.59	20.59	0.115	2	PASS
			RB25#25	18.80	1.59	20.39	0.109	2	PASS
15 MHz	QPSK	RB1#0	RB50#0	18.91	1.59	20.50	0.112	2	PASS
			RB1#0	20.93	1.59	22.52	0.179	2	PASS
			RB1#38	20.72	1.59	22.31	0.170	2	PASS
			RB1#74	20.84	1.59	22.43	0.175	2	PASS
			RB36#0	19.89	1.59	21.48	0.141	2	PASS
			RB36#19	19.93	1.59	21.52	0.142	2	PASS
			RB36#39	19.95	1.59	21.54	0.143	2	PASS
	16-QAM	RB75#0	RB75#0	19.91	1.59	21.50	0.141	2	PASS
			RB1#0	19.79	1.59	21.38	0.137	2	PASS
			RB1#38	19.71	1.59	21.30	0.135	2	PASS
			RB1#74	19.80	1.59	21.39	0.138	2	PASS
			RB36#0	18.89	1.59	20.48	0.112	2	PASS
			RB36#19	18.89	1.59	20.48	0.112	2	PASS
			RB36#39	18.92	1.59	20.51	0.112	2	PASS
MCH	QPSK	RB75#0	RB75#0	18.91	1.59	20.50	0.112	2	PASS
			RB1#0	21.03	1.59	22.62	0.183	2	PASS
			RB1#38	21.17	1.59	22.76	0.189	2	PASS
			RB1#74	21.05	1.59	22.64	0.184	2	PASS
			RB36#0	20.16	1.59	21.75	0.150	2	PASS
			RB36#19	20.19	1.59	21.78	0.151	2	PASS
			RB36#39	20.17	1.59	21.76	0.150	2	PASS