



Product Service

---

**Choose certainty.  
Add value.**

# Report On

FCC and Industry Canada Testing of the  
SRT Marine Technology Ltd  
Cobalt: Class B AIS Unit in accordance with FCC CFR 47 Part 80 and  
Industry Canada RSS-182

**COMMERCIAL-IN-CONFIDENCE**

**Document 75912008 Report 07 Issue 2**

**May 2011**



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuvps.co.uk](http://www.tuvps.co.uk)

**REPORT ON**

FCC and Industry Canada Testing of the  
SRT Marine Technology Ltd  
Cobalt: Class B AIS Unit in accordance with FCC CFR 47 Part 80  
and Industry Canada RSS-182

Document 75912008 Report 07 Issue 2

May 2011

**PREPARED FOR**

SRT Marine Technology Ltd  
Wireless House  
Westfield Industrial Estate  
Midsomer Norton  
Bath  
BA3 4BS

**PREPARED BY**

**N Bennett**  
Senior Administrator

**APPROVED BY**

**M Jenkins**  
Authorised Signatory

**DATED**

23 May 2011

**This report has been up-issued to Issue 2 to correct typographical errors.**

---

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 80 and Industry Canada RSS-182. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

B Airs

S Bennett





## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Declaration of Build Status ..... 6
1.4	Product Information ..... 7
1.5	Test Conditions ..... 7
1.6	Deviations from the Standard ..... 7
1.7	Modification Record ..... 7
<b>2</b>	<b>TEST DETAILS ..... 8</b>
2.1	Frequency Stability Under Voltage Variations ..... 9
2.2	Transmitter Frequency Tolerance ..... 11
2.3	Occupied Bandwidth ..... 14
2.4	Emission Limitations (Emission Mask) ..... 23
2.5	Emission Limitations (Conducted Transmitter Spurious) ..... 31
2.6	Modulation Characteristics ..... 36
2.7	Transmitter Power ..... 41
2.8	Suppression of Interference Aboard Ships ..... 43
2.9	Transmitter Carrier Power Reduction ..... 53
2.10	Transmitter Frequency Deviation ..... 55
<b>3</b>	<b>TEST EQUIPMENT USED ..... 62</b>
3.1	Test Equipment Used ..... 63
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 66</b>
4.1	Accreditation, Disclaimers and Copyright ..... 67



## **SECTION 1**

### **REPORT SUMMARY**

FCC and Industry Canada Testing of the  
SRT Marine Technology Ltd  
Cobalt: Class B AIS Unit



## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC and Industry Canada Testing of the SRT Marine Technology Ltd Cobalt: Class B AIS Unit to the requirements of FCC Part 80 and Industry Canada RSS-182.

Objective	To perform FCC and Industry Canada Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	SRT Marine Technology Ltd
Model Number(s)	011-0014
Serial Number(s)	10
Number of Samples Tested	One
Test Specification/Issue/Date	FCC CFR 47 Part 80: 2009 Industry Canada RSS-182: 2003
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	R001715
Date	02 December 2010
Start of Test	14 January 2011
Finish of Test	24 February 2011
Name of Engineer(s)	B Airs S Bennett



Product Service

**1.2 BRIEF SUMMARY OF RESULTS**

A brief summary of results in accordance with FCC CFR 47 Part 80 and Industry Canada RSS-182 is shown below.

Configuration 1 - As supplied							
Section	Clause		Test Description	Mode	Mod State	Result	Base Standard
	FCC	IC					
2.1	80.209 (a)	3.9, 4.2 and 6.1	Frequency Stability Under Voltage Variations	Tx	1	Pass	
2.2	80.209 (a)	3.9, 6.1 and 6.2	Transmitter Frequency Tolerances	Tx	1	Pass	
2.3	80.205 (a)	3.4 (d)(e) and 3.9	Occupied Bandwidth	Tx	1	Pass	
2.4	80.211 (f)(1)(2)	6.3.1 and 6.6	Emission Limitations (Emission Mask)	Tx	1	Pass	
2.5	80.211 (f)(3)	4.4 and 6.3	Emission Limitations (Conducted Transmitter Mask)	Tx	1	Pass	
2.6	80.213	-	Modulation Characteristics	Tx	1	Pass	
2.7	80.215	3.7, 3.9, 4.3 and 6.2	Transmitter Power	Tx	1	Pass	
2.8	80.217 (b)	-	Suppression of Interference Aboard Ships	Rx	1	Pass	
2.9	80.215 (e)(g)(1)(2)(3)	3.7	Transmitter Carrier Power Reduction	Tx	1	Pass	
2.10	80.213 (a)(2)	3.4 (b)	Transmitter Frequency Deviation	Tx	1	Pass	



Product Service

### 1.3 DECLARATION OF BUILD STATUS

<b>MAIN EUT</b>	
<b>MANUFACTURING DESCRIPTION</b>	COBALT; Class B AIS Transceiver OEM Module to IEC62287-1
<b>MANUFACTURER</b>	SRT Marine Technology Ltd
<b>TYPE</b>	Marine Radio Equipment
<b>PART NUMBER</b>	011-0014
<b>SERIAL NUMBER</b>	10, 11, 12
<b>HARDWARE VERSION</b>	Revision 2
<b>SOFTWARE VERSION</b>	1271, 1285
<b>TRANSMITTER OPERATING RANGE</b>	VHF = 156.025-162.025MHz
<b>RECEIVER OPERATING RANGE</b>	VHF = 156.025-162.025MHz, GPS = 1575.42MHz
<b>COUNTRY OF ORIGIN</b>	United Kingdom
<b>INTERMEDIATE FREQUENCIES</b>	19.655MHz, 455KHz, 29.255MHz,
<b>ITU DESIGNATION OF EMISSION</b>	6K00G7E
<b>HIGHEST INTERNALLY GENERATED FREQUENCY</b>	213.68MHz
<b>OUTPUT POWER (W or dBm)</b>	2 W, 33dBm
<b>FCC ID</b>	N/A
<b>INDUSTRY CANADA ID</b>	N/A
<b>TECHNICAL DESCRIPTION (a brief description of the intended use and operation)</b>	Marine AIS CSTDMA Class B Transceiver OEM Module to IEC62287-1
<b>BATTERY/POWER SUPPLY</b>	
<b>MANUFACTURING DESCRIPTION</b>	Switch mode power supply
<b>MANUFACTURER</b>	SRT Marine Technology Ltd
<b>TYPE</b>	Switch mode power supply
<b>PART NUMBER</b>	N/A as internal
<b>VOLTAGE</b>	12 to 24V DC, -10% to +30% (10.8 to 31.2V DC)
<b>COUNTRY OF ORIGIN</b>	United Kingdom

Signature

Nathan Emery

Date

15<sup>th</sup> February 2011



## 1.4 PRODUCT INFORMATION

### 1.4.1 Technical Description

The Equipment Under Test (EUT) was a SRT Marine Technology Ltd Cobalt: Class B AIS Unit. A full technical description can be found in the manufacturer's documentation.

### 1.4.2 Test Configuration

Configuration 1: As supplied

The EUT was configured in accordance with FCC CFR 47 Part 80 and Industry Canada RSS-182.

## 1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure, test laboratories or an open test area as appropriate.

The EUT was powered from a 12V DC supply.

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

Industry Canada Accreditation  
IC2932B-1 Octagon House, Fareham Test Laboratory

## 1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

## 1.7 MODIFICATION RECORD

The table below details modifications made to the EUT during the test programme. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable
1	Rx1 Tuning Range Extended (C261 Fitted)	Nathan Emery	06 January 2011





Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC and Industry Canada Testing of the  
SRT Marine Technology Ltd  
Cobalt: Class B AIS Unit



Product Service

## **2.1 FREQUENCY STABILITY UNDER VOLTAGE VARIATIONS**

### **2.1.1 Specification Reference**

FCC Part 80, Clause 80.209 (a)  
Industry Canada RSS-182, Clause 3.9, 6.1 and 6.2

### **2.1.2 Equipment Under Test**

Cobalt: Class B AIS Unit, S/N: 10

### **2.1.3 Date of Test and Modification State**

17 January 2011 - Modification State 1

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.5 Environmental Conditions**

Ambient Temperature	23.0°C
Relative Humidity	32.0%

### **2.1.6 Test Procedure**

The EUT was connected to a spectrum analyser via a 30 dB attenuator with an external high stability frequency reference connected.

The EUT was transmitted unmodulated and the trace set to max hold with a 100 Hz resolution bandwidth.

The marker was then used to measure the peak response and the result recorded in the table on the following page.



Product Service

## 2.1.7 Test Results

12 V DC Supply

Test Conditions		Frequency Error (Hz)			
		156.025 MHz		162.025 MHz	
		TX1	TX2	TX1	TX2
T <sub>nom</sub> (+23.0°C)	V <sub>min</sub> (10.80V)	-71	-48	-81	-83
	V <sub>min</sub> (10.20V)	-81	-48	-81	-90
	V <sub>nom</sub> (12.00V)	-81	-55	-81	-83
	V <sub>max</sub> (13.20V)	-93	-55	-74	-58
	V <sub>max</sub> (13.80V)	-81	-81	-77	-71
Maximum Frequency Error (Hz)		-93	-81	-81	-90
Measurement uncertainty (Hz)		±11			

1 – V<sub>min</sub> and V<sub>max</sub> is V<sub>nom</sub> ± 10% for RSS-182

2 – V<sub>min</sub> and V<sub>max</sub> is V<sub>nom</sub> ± 15% for FCC Part 80

### Limit Clause

The frequency error shall not exceed 10ppm. (±1.56025 kHz / ±1.62025 kHz)



Product Service

## **2.2 TRANSMITTER FREQUENCY TOLERANCE**

### **2.2.1 Specification Reference**

FCC Part 80, Clause 80.209 (a)  
Industry Canada RSS-182, Clause 3.9, 6.1 and 6.2

### **2.2.2 Equipment Under Test**

Cobalt: Class B AIS Unit, S/N: 10

### **2.2.3 Date of Test and Modification State**

18 January 2011 - Modification State 1

### **2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.5 Environmental Conditions**

Ambient Temperature	23.0°C
Relative Humidity	32.0%

### **2.2.6 Test Procedure**

The EUT was connected to a spectrum analyser via a 30 dB attenuator with an external high stability frequency reference connected. The EUT was transmitted unmodulated and the trace set to max hold with a 100 Hz resolution bandwidth. The marker was then used to measure the peak response and the result recorded in the table on the following page.



Product Service

## 2.2.7 Test Results

12V DC Supply

Temperature Interval (°C)	Frequency Error (kHz)					
	156.025 MHz					
	10.8 V		12.0 V		13.2 V	
	TX1	TX2	TX1	TX2	TX1	TX2
-20	-0.036	-0.034	-0.045	-0.034	-0.031	-0.036
-15	+0.038	-0.071	+0.041	-0.072	+0.014	-0.071
-10	+0.086	-0.118	+0.082	-0.115	+0.087	-0.105
0	+0.096	-0.143	+0.097	-0.143	+0.096	-0.145
+10	+0.077	-0.108	+0.069	-0.105	+0.062	-0.108
+20	-0.071	-0.048	-0.081	-0.055	-0.083	-0.055
+30	-0.016	-0.031	-0.038	-0.029	-0.046	-0.032
+40	-0.066	-0.043	-0.066	-0.035	-0.063	-0.043
+50	-0.069	-0.079	-0.063	-0.069	-0.049	-0.061
+55	-0.034	-0.164	-0.024	-0.163	+0.005	-0.149
Maximum freq. error (kHz)	+0.096	+0.143	+0.097	+0.163	+0.096	+0.149
Measurement uncertainty (Hz)	±11					



Product Service

Temperature Interval (°C)	Frequency Error (kHz)					
	162.025 MHz					
	10.8 V		12.0 V		13.2 V	
	TX1	TX2	TX1	TX2	TX1	TX2
-20	+0.016	-0.042	+0.021	-0.042	+0.016	-0.045
-15	+0.067	-0.074	+0.069	-0.073	+0.072	-0.068
-10	+0.095	-0.118	+0.096	-0.121	+0.095	-0.119
0	+0.095	-0.140	+0.095	-0.142	+0.092	-0.142
+10	+0.047	-0.097	+0.047	-0.097	+0.045	-0.101
+20	-0.081	-0.083	-0.081	-0.083	+0.074	-0.058
+30	-0.061	-0.029	-0.062	-0.032	-0.065	-0.031
+40	-0.064	-0.034	-0.066	-0.032	-0.064	-0.034
+50	-0.024	-0.101	-0.016	-0.098	-0.011	-0.091
+55	+0.031	-0.179	+0.038	-0.169	+0.048	-0.149
Maximum freq. error (Hz)	+0.095	+0.179	+0.096	+0.169	+0.095	+0.149
Measurement uncertainty (Hz)	±11					

Limit Clause

The frequency error shall not exceed 10ppm. ( $\pm 1.56025$  kHz /  $\pm 1.62025$  kHz)



Product Service

## **2.3 OCCUPIED BANDWIDTH**

### **2.3.1 Specification Reference**

FCC Part 80, Clause 80.205 (a)  
Industry Canada RSS-182, Clause 3.4 (d)(e) and 3.9

### **2.3.2 Equipment Under Test**

Cobalt: Class B AIS Unit, S/N: 10

### **2.3.3 Date of Test and Modification State**

18 January 2011 - Modification State 1

### **2.3.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.5 Environmental Conditions**

Ambient Temperature	23.2°C
Relative Humidity	29.6%

### **2.3.6 Test Procedure**

The EUT was connected to a spectrum analyser via a cable and attenuators. The EUT was configured to transmit three different packet data loads at maximum power.

The trace was set to max hold until a sufficient number of sweeps was observed. The 99% occupied bandwidth function was selected on the spectrum analyser and the result and the trace were recorded.



Product Service

### 2.3.7 Test Results

Frequency	Modulation	TX No	Result (kHz)	Authorised Bandwidth (kHz)
156.025 MHz	101010	TX1	9.7756	20
		TX2	9.7756	20
	00001111	TX1	9.5353	20
		TX2	9.4551	20
	PRBS	TX1	9.5353	20
		TX2	9.4551	20
162.025 MHz	101010	TX1	9.7756	20
		TX2	9.8558	20
	00001111	TX1	9.5353	20
		TX2	9.5353	20
	PRBS	TX1	9.6153	20
		TX2	9.4551	20






Product Service

156.025 MHz


101010

Tx1

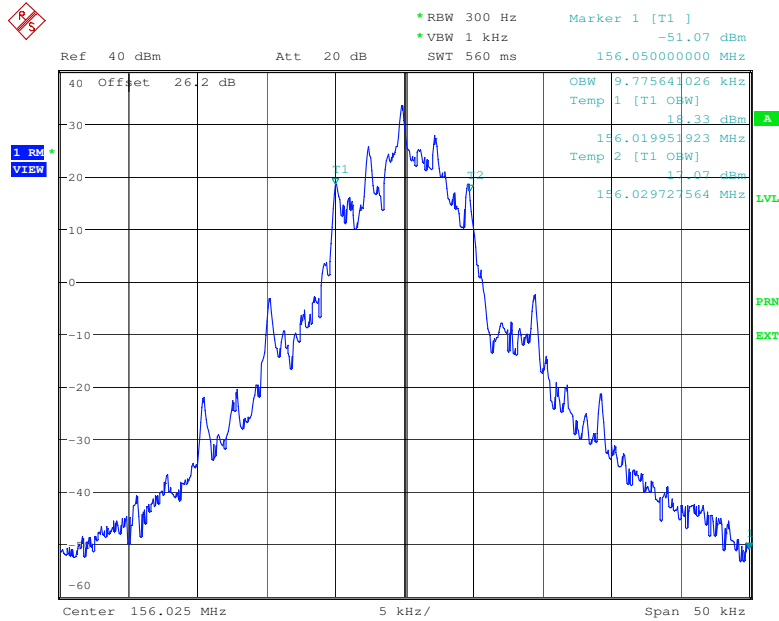

Date: 18.FEB.2011 10:55:22

Tx2

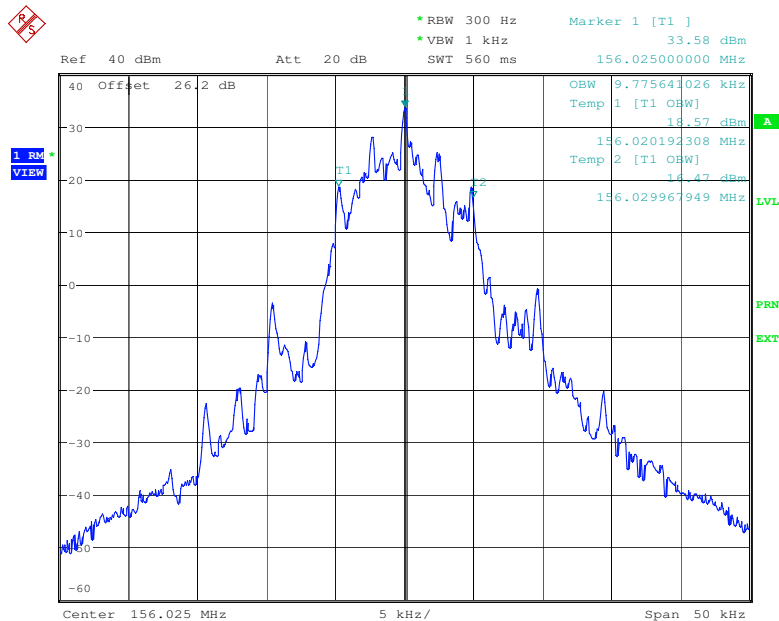


Date: 18.FEB.2011 13:14:25



Product Service


00001111

### Tx1

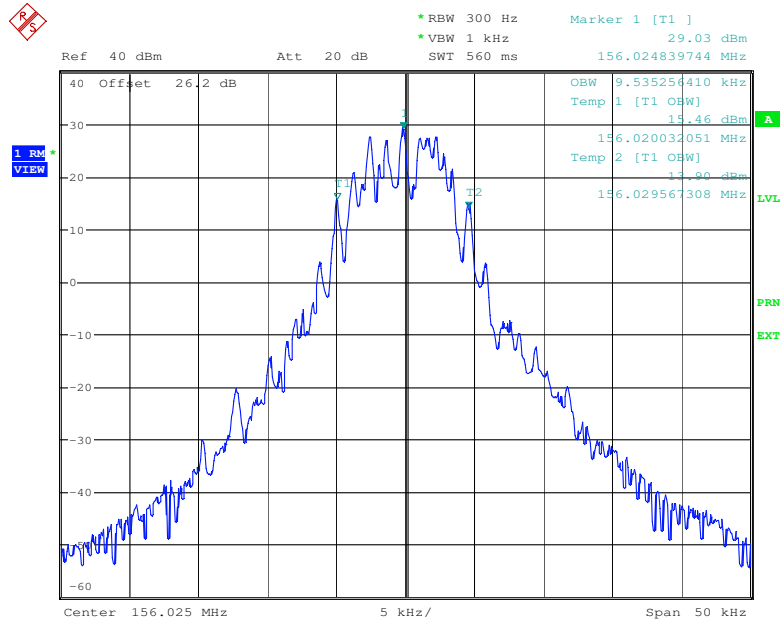

Date: 18.FEB.2011 11:03:07

### Tx2

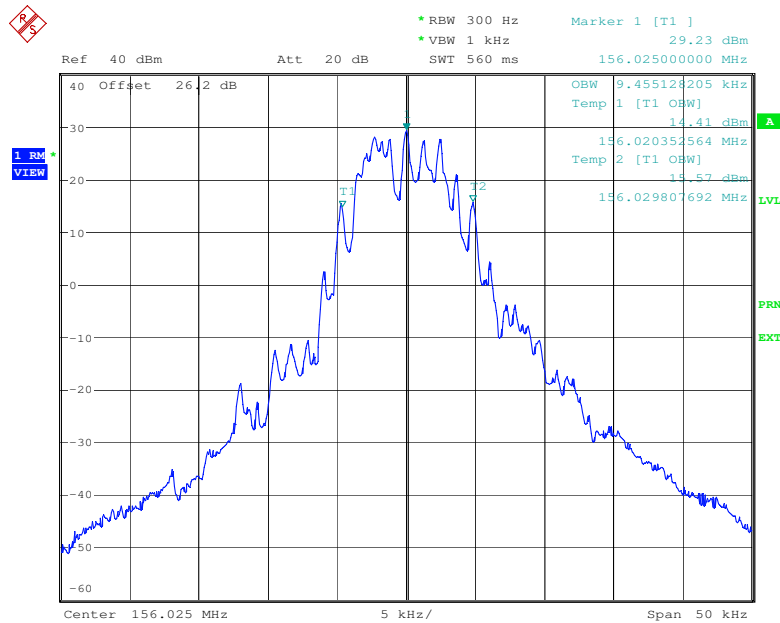


Date: 18.FEB.2011 13:24:42



Product Service


## PRBS

### Tx1

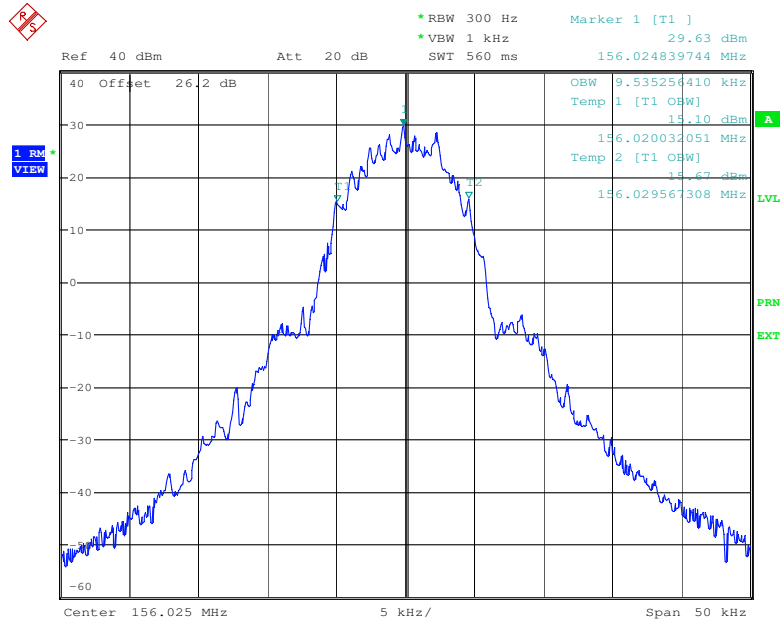

Date: 18.FEB.2011 11:12:24

### Tx2

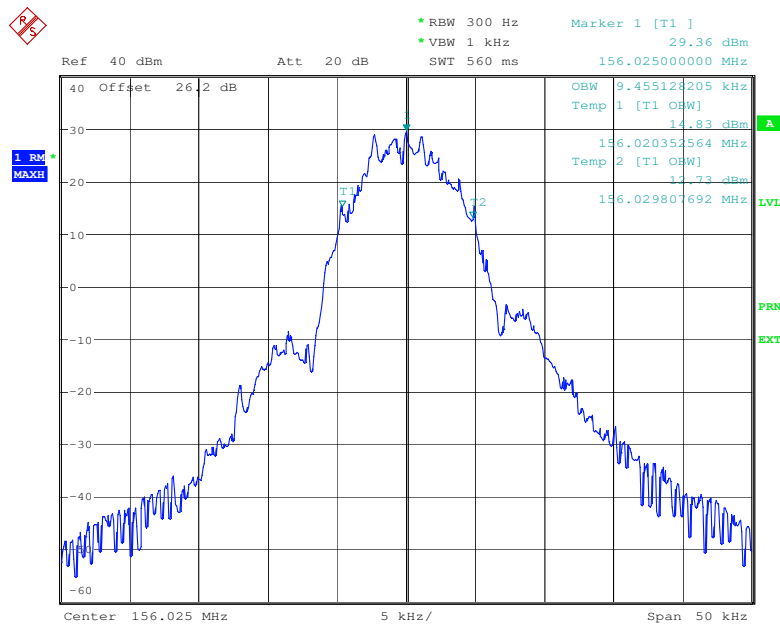

Date: 18.FEB.2011 13:37:02




Product Service

162.025 MHz

101010

Tx1

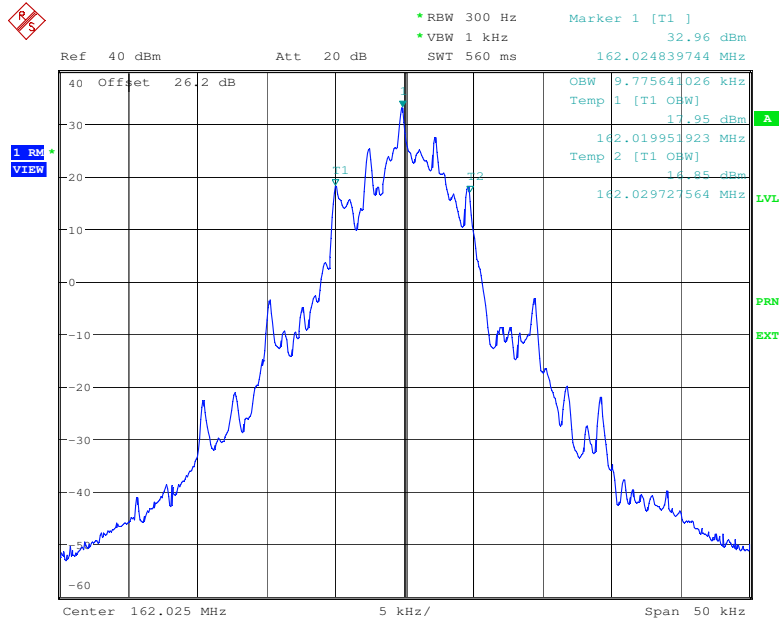

Date: 18.FEB.2011 12:47:39

Tx2




Date: 18.FEB.2011 13:45:54



Product Service


00001111

### Tx1

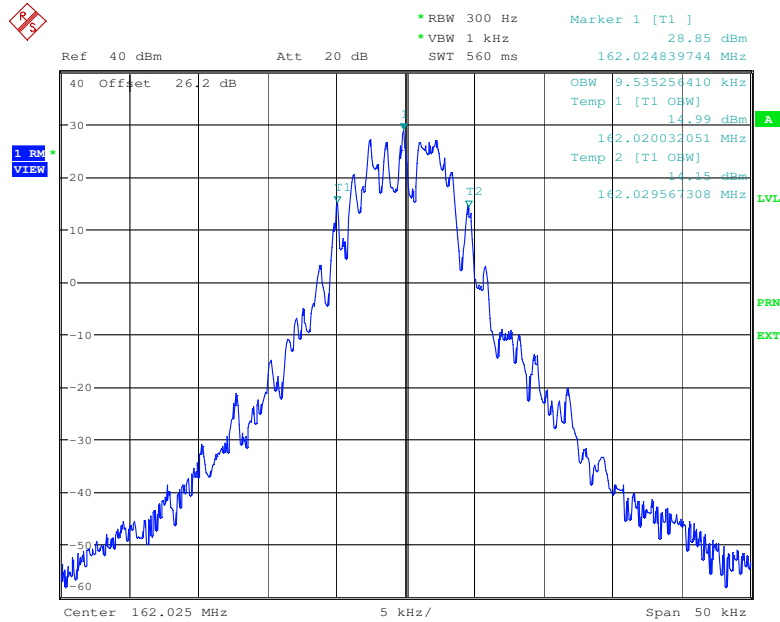

Date: 18.FEB.2011 12:55:15

### Tx2

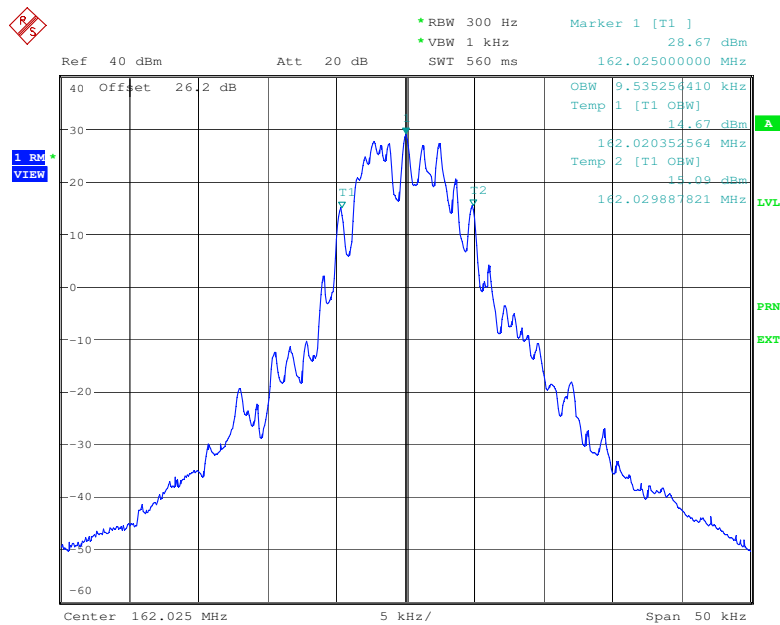


Date: 18.FEB.2011 14:51:17



Product Service


## PRBS

### Tx1

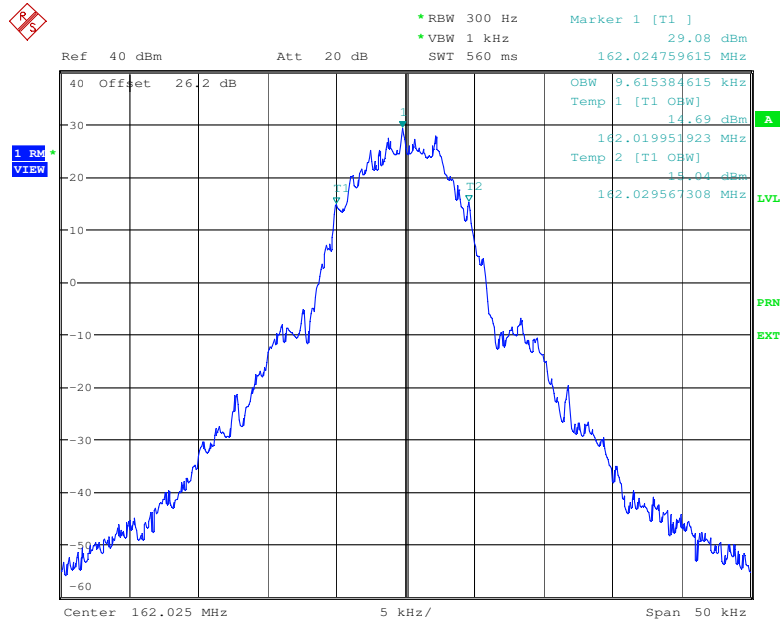

Date: 18.FEB.2011 13:02:16

### Tx2

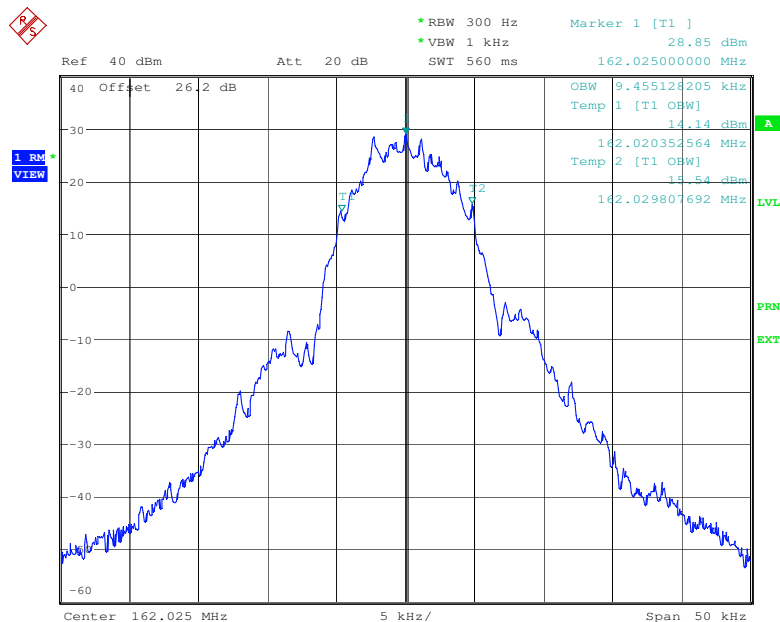

Date: 18.FEB.2011 15:03:23

## Limit Clause

(d) The nominal authorised channel bandwidth for voice is 20 kHz



Product Service

(e) For data modulation, an authorised bandwidth of 16 kHz is permitted.



Product Service

## **2.4 EMISSION LIMITATIONS (EMISSION MASK)**

### **2.4.1 Specification Reference**

FCC Part 80, Clause 80.211 (f)(1)(2)  
Industry Canada RSS-182, Clause 6.3.1 and 6.6

### **2.4.2 Equipment Under Test**

Cobalt: Class B AIS Unit, S/N: 10

### **2.4.3 Date of Test and Modification State**

18 and 21 February 2011 - Modification State 1

### **2.4.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.5 Environmental Conditions**

Ambient Temperature	23.4°C
Relative Humidity	28.5%

### **2.4.6 Test Procedure**

The EUT was connected to a spectrum analyser via a 30 dB attenuator. The resolution bandwidth and video bandwidth were set to 300 Hz and 1 kHz respectively. The EUT was configured to transmit three different packet data loads. These were 11110000, 10101010 and PRBS. The reference level was set to the power measured in 80.215 (FCC) and 6.2 (RSS-182). The traces were recorded and are shown below.

### **2.4.7 Test Results**

12V DC Supply






Product Service

156.025 MHz


101010

TX1

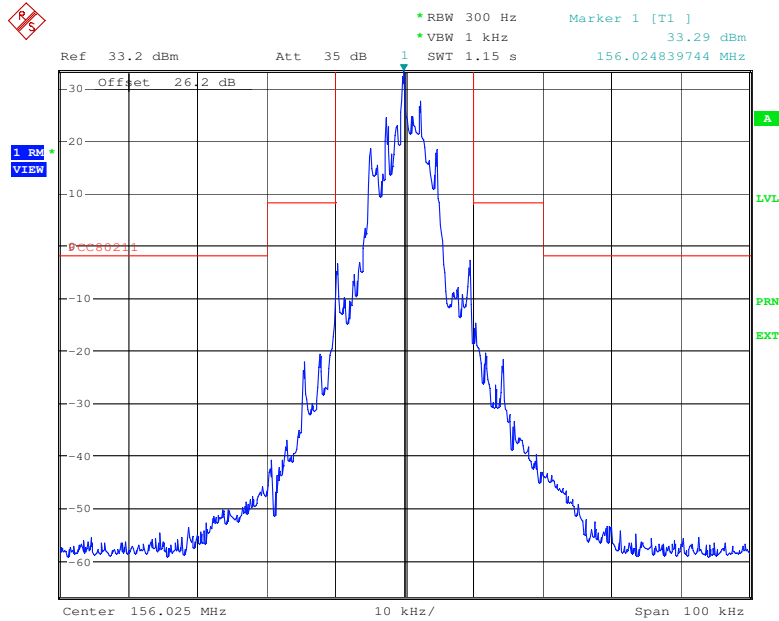

Date: 18.FEB.2011 15:35:44

TX2

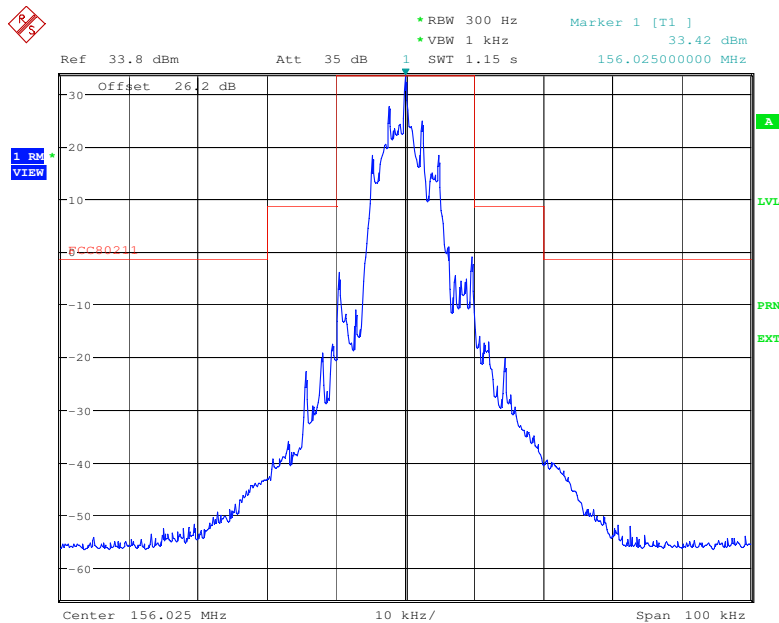


Date: 21.FEB.2011 09:40:08



Product Service


00001111

### TX1

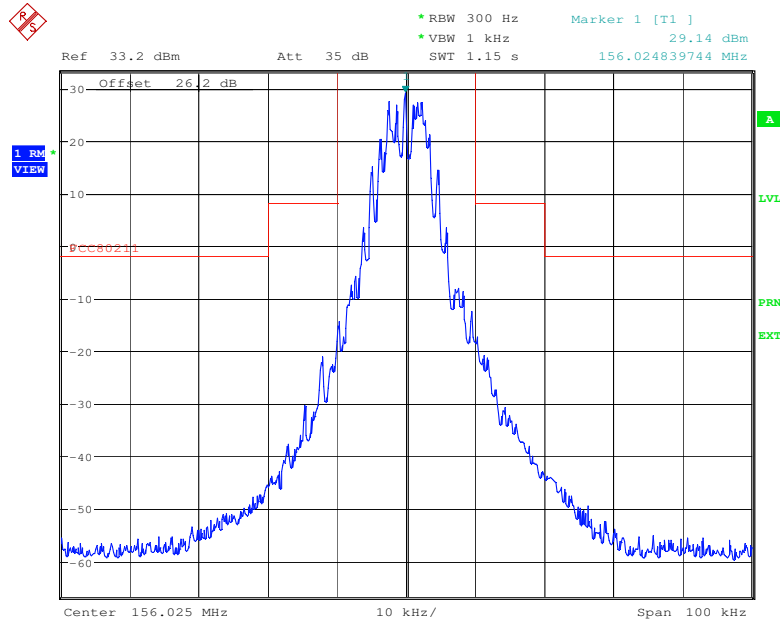

Date: 18.FEB.2011 15:54:58

### TX2

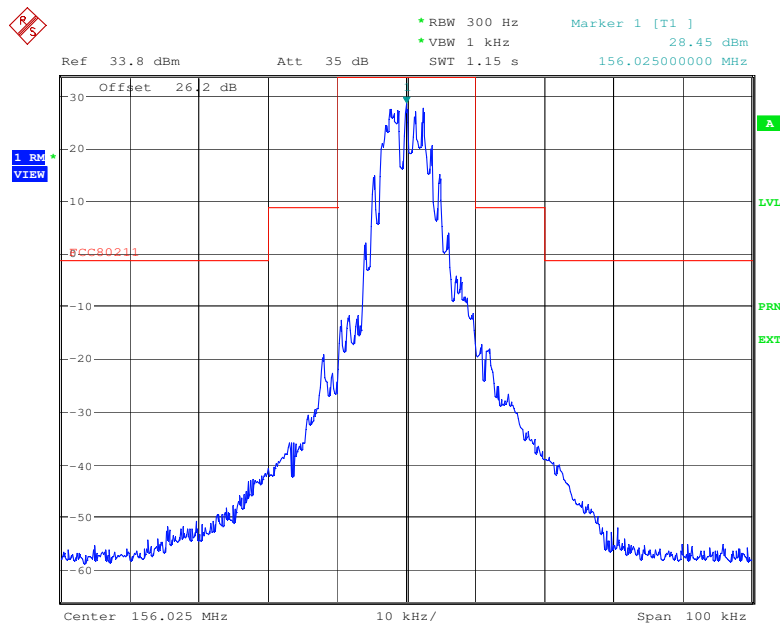


Date: 21.FEB.2011 10:12:10



Product Service


## PRBS

### TX1

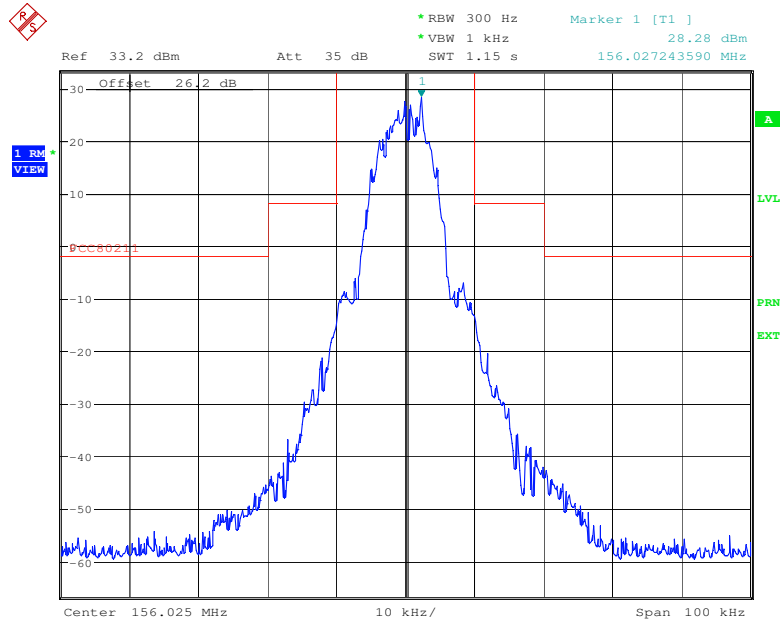

Date: 18.FEB.2011 16:07:00

### TX2

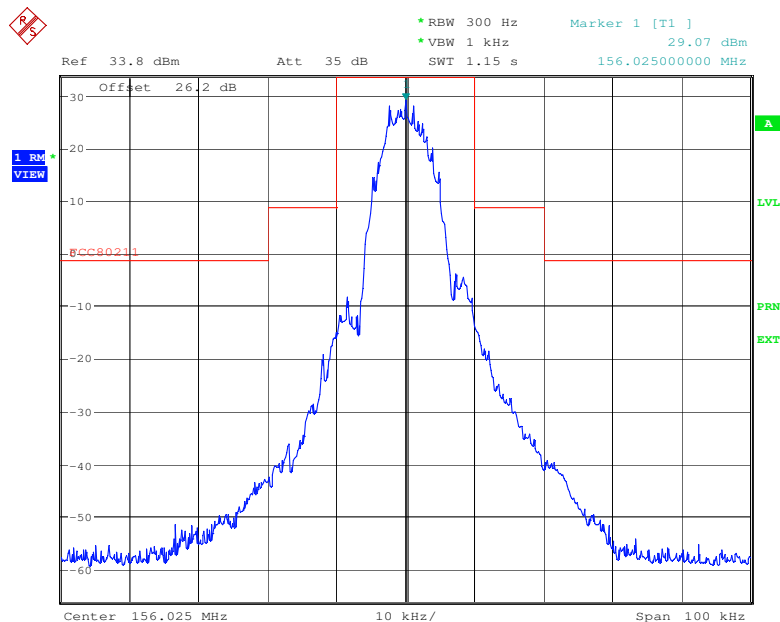

Date: 21.FEB.2011 10:27:48




Product Service

162.025 MHz


101010

TX1

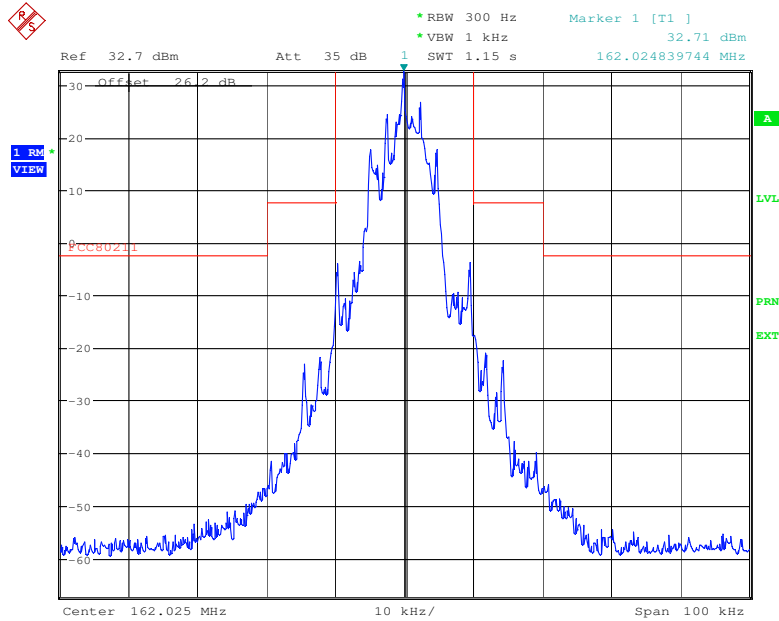

Date: 18.FEB.2011 16:23:09

TX2

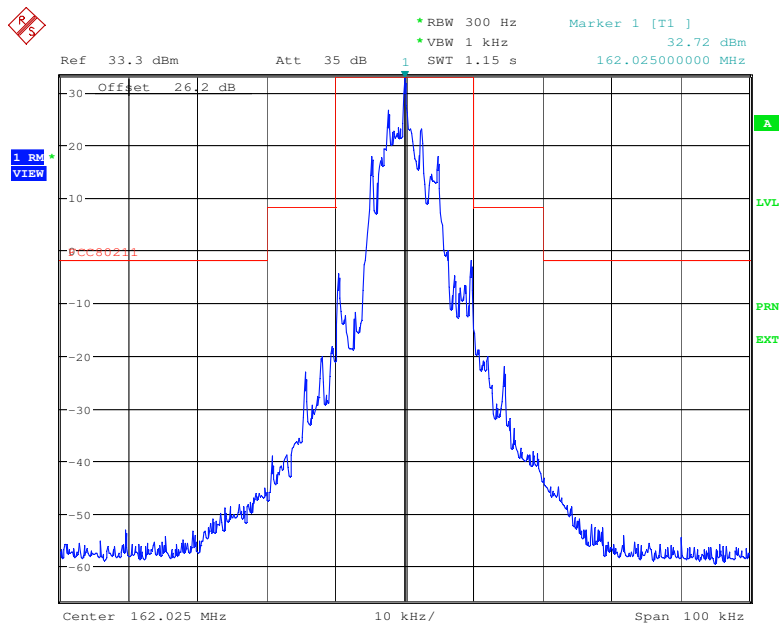


Date: 21.FEB.2011 10:44:35



Product Service


00001111

### TX1

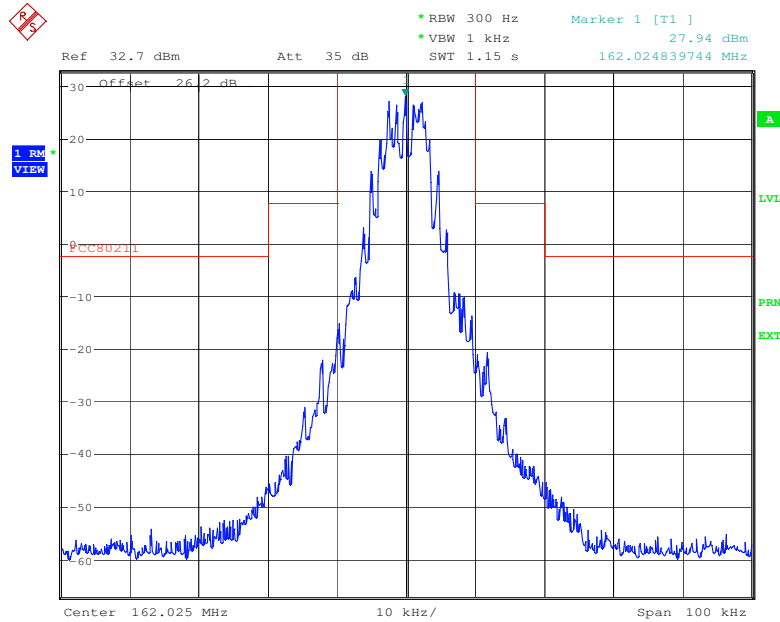

Date: 18.FEB.2011 16:33:48

### TX2

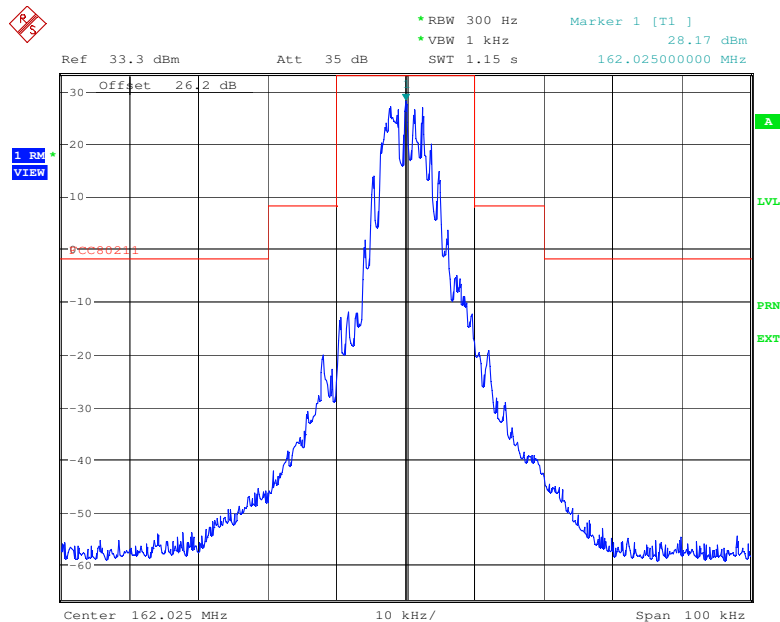


Date: 21.FEB.2011 11:01:00



Product Service


## PRBS

### TX1

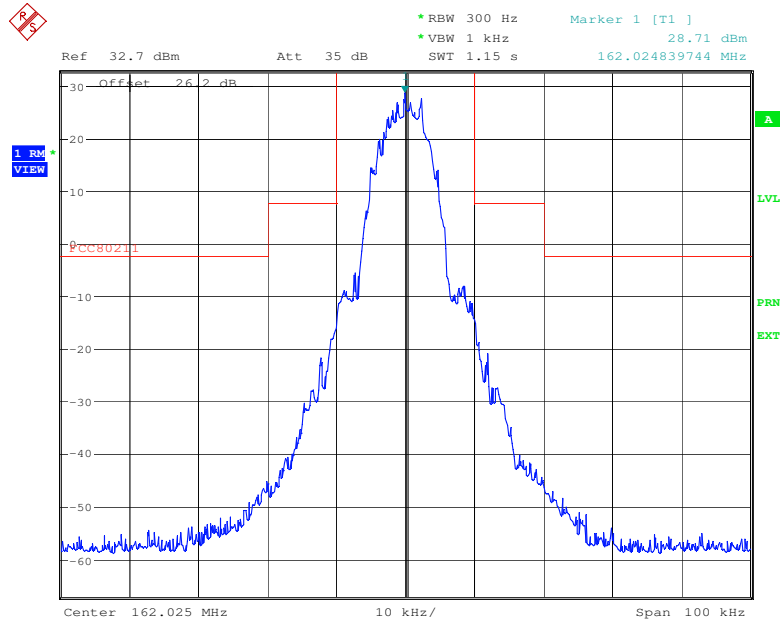

Date: 18.FEB.2011 16:53:54

### TX2

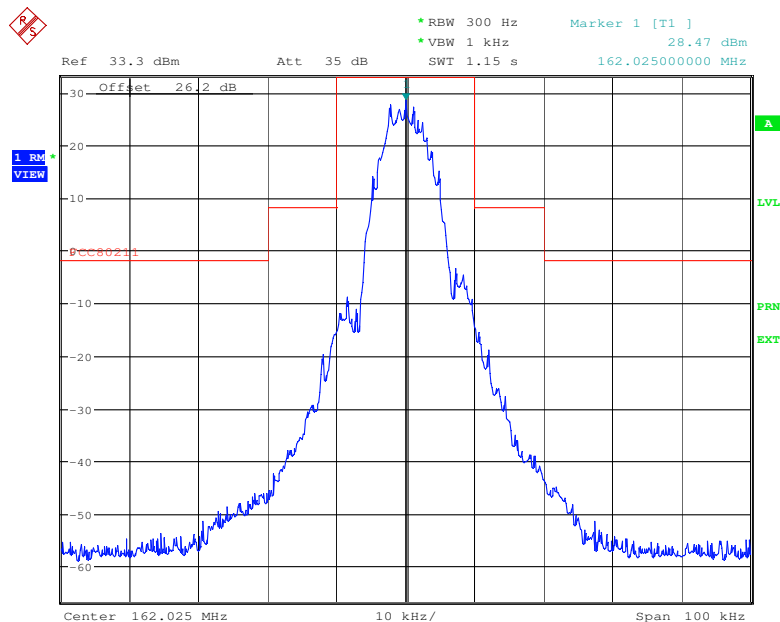

Date: 21.FEB.2011 11:26:35



Product Service

Limit Clause

On any frequency removed from the assigned frequency by more than 50 % up to and including 100 % of the authorized bandwidth: At least 25 dB

On any frequency removed from the assigned frequency by more than 100 % up to and including 250 % of the authorized bandwidth: At least 35 dB



Product Service

## **2.5 EMISSION LIMITATIONS (CONDUCTED TRANSMITTER SPURIOUS)**

### **2.5.1 Specification Reference**

FCC Part 80, Clause 80.211 (f)(3)  
Industry Canada RSS-182, Clause 4.4 and 6.3

### **2.5.2 Equipment Under Test**

Cobalt: Class B AIS Unit, S/N: 10

### **2.5.3 Date of Test and Modification State**

21 February 2011 - Modification State 1

### **2.5.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.5 Environmental Conditions**

Ambient Temperature	22.8°C
Relative Humidity	31.7%

### **2.5.6 Test Procedure**

Using a spectrum analyser, the emissions were measured between the range 9 kHz to 2 GHz. The path loss between the EUT and the spectrum analyser was measured and the highest value of attenuation across the range was entered as a reference level offset. The resolution bandwidth and video bandwidth were set to 30 kHz and 100 kHz respectively. Due to the burst nature of the signal, the spectrum analyser was set to measure only during the burst (gated trigger).

The trace was set to max hold and a peak detector was used to give the worst case result. The traces were recorded as shown on the following page.

### **2.5.7 Test Results**

12 V DC Supply

Maximum Power 2W






Product Service

### 156.025 MHz


Tx1

### 9 kHz to 300 MHz

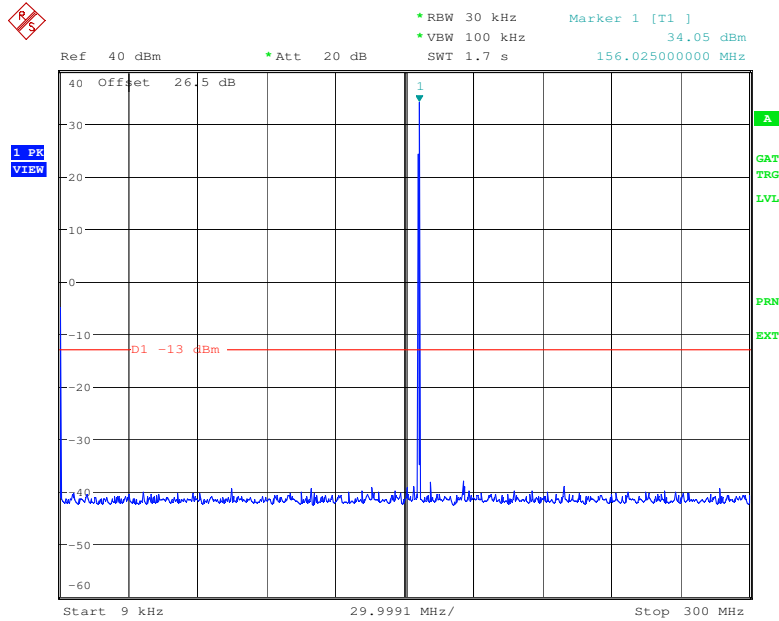

Date: 21.FEB.2011 12:06:33

### 300 MHz to 2 GHz

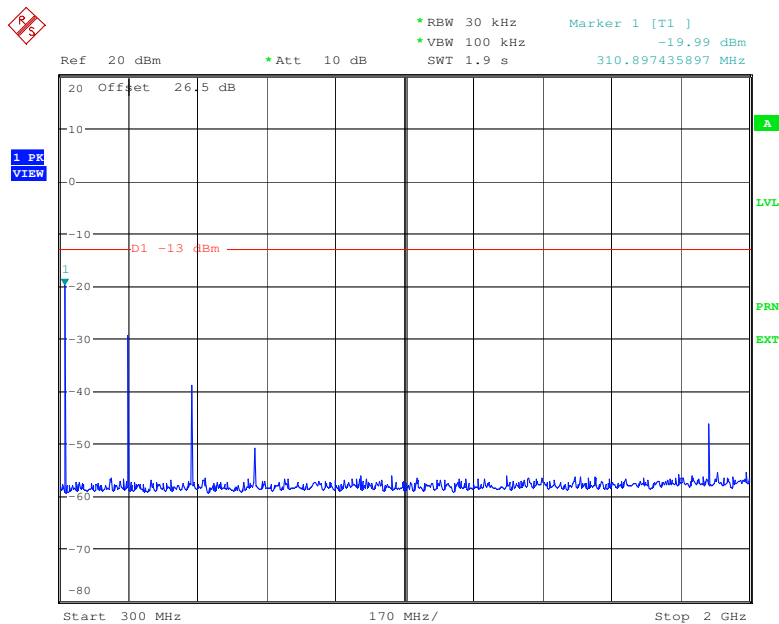


Date: 21.FEB.2011 13:01:52



Product Service


## Tx2

### 9 kHz to 300 MHz

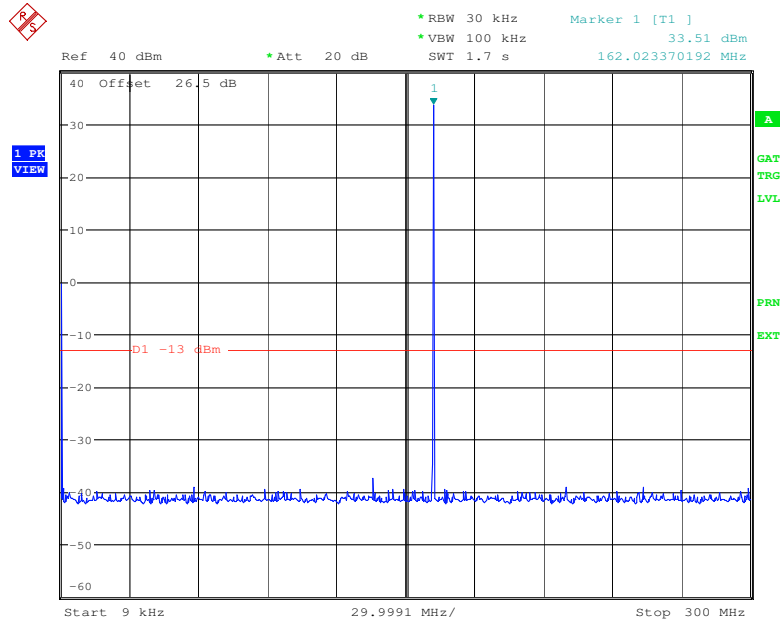

Date: 21.FEB.2011 12:25:31

### 300 MHz to 2 GHz

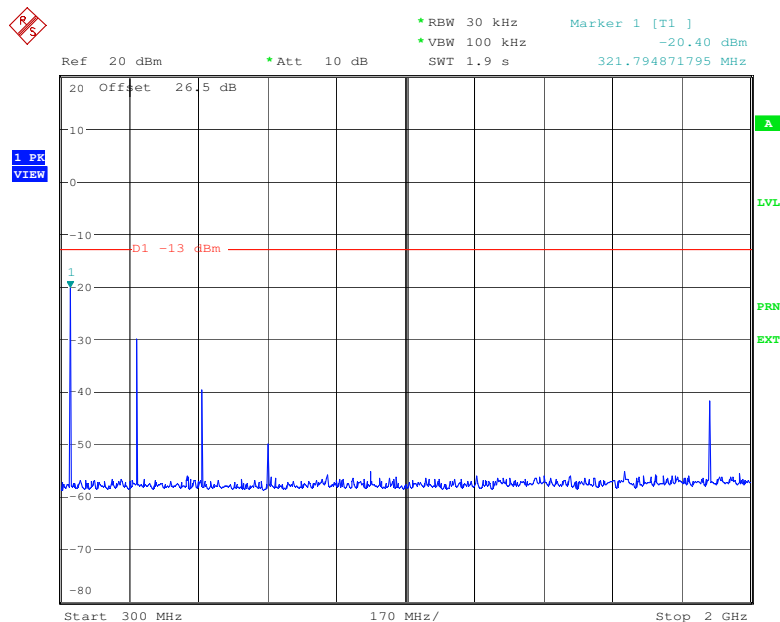

Date: 21.FEB.2011 13:04:18




Product Service

### 160.025 MHz


Tx1

### 9 kHz to 300 MHz

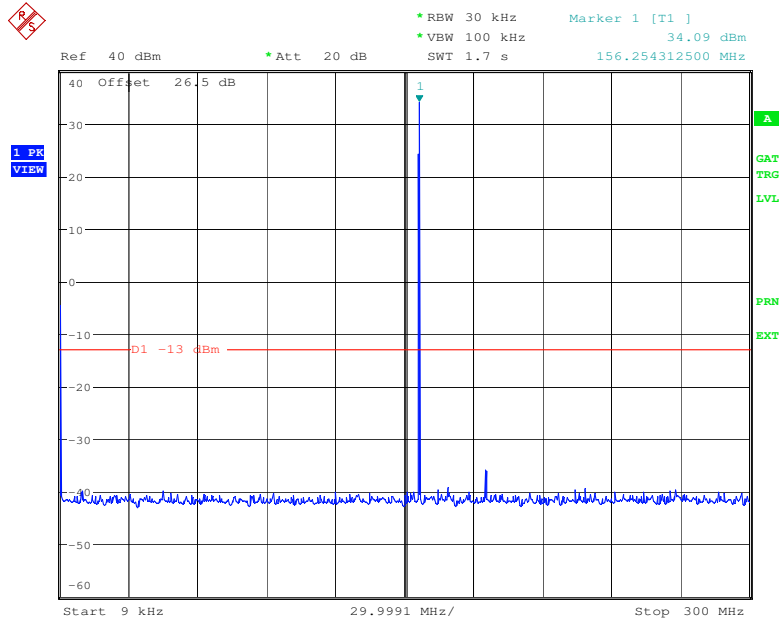

Date: 21.FEB.2011 12:35:47

### 300 MHz to 2 GHz

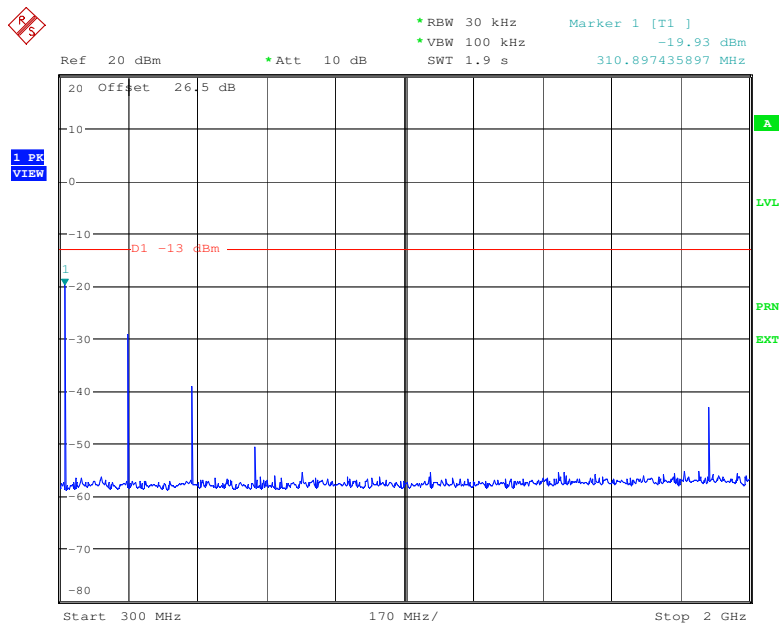


Date: 21.FEB.2011 13:07:16



Product Service


## Tx2

### 9 kHz to 300 MHz

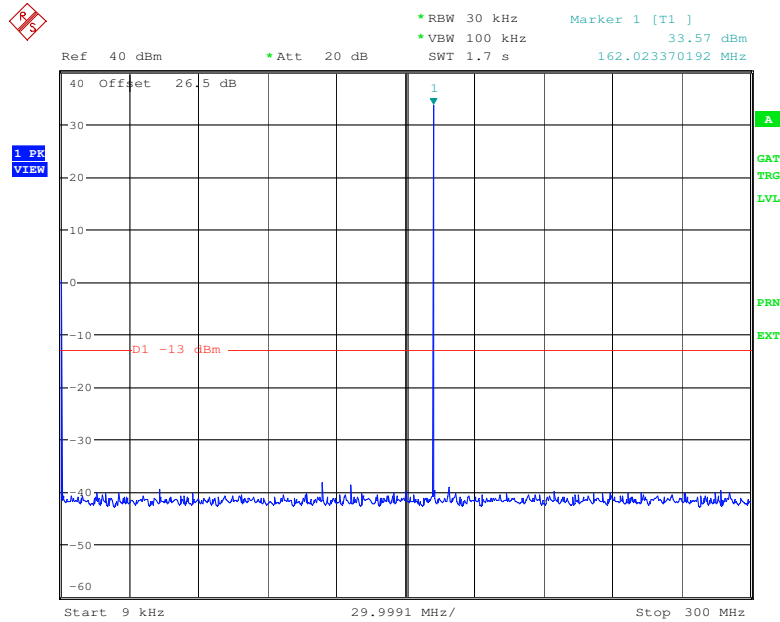

Date: 21.FEB.2011 12:44:39

### 300 MHz to 2 GHz

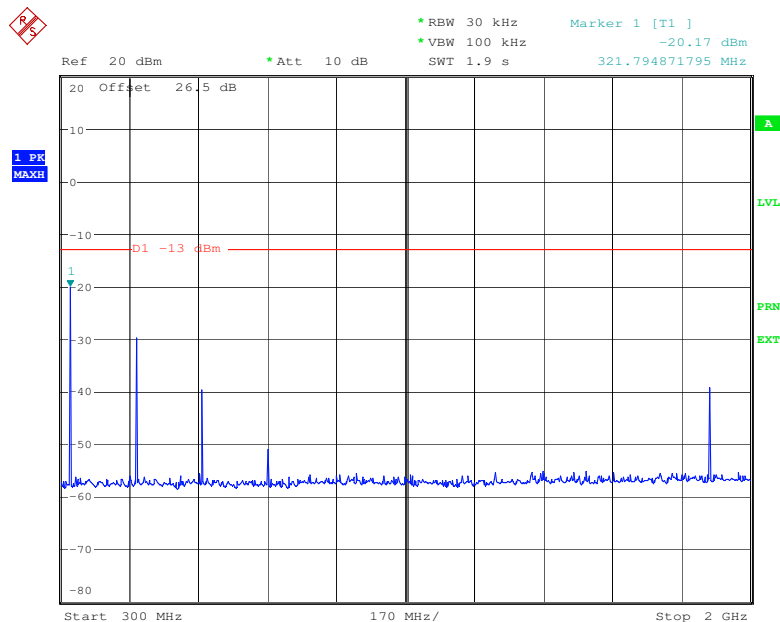

Date: 21.FEB.2011 13:12:49

### Limit Clause

>250 % of authorised bandwidth  $43+10 \log P$  **OR** -13 dBm



Product Service

## **2.6 MODULATION CHARACTERISTICS**

### **2.6.1 Specification Reference**

FCC Part 80, Clause 80.213

### **2.6.2 Equipment Under Test**

Cobalt: Class B AIS Unit, S/N: 10

### **2.6.3 Date of Test and Modification State**

24 February 2011 - Modification State 1

### **2.6.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.6.5 Environmental Conditions**

Ambient Temperature	23.5°C
Relative Humidity	37.3%

### **2.6.6 Test Procedure**

The EUT was configured to transmit three different packet data loads. These were 11110000, 10101010 and PRBS. The traces were recorded as shown below.

### **2.6.7 Test Results**

12 V DC Supply




Product Service

156.025 MHz


101010

TX1

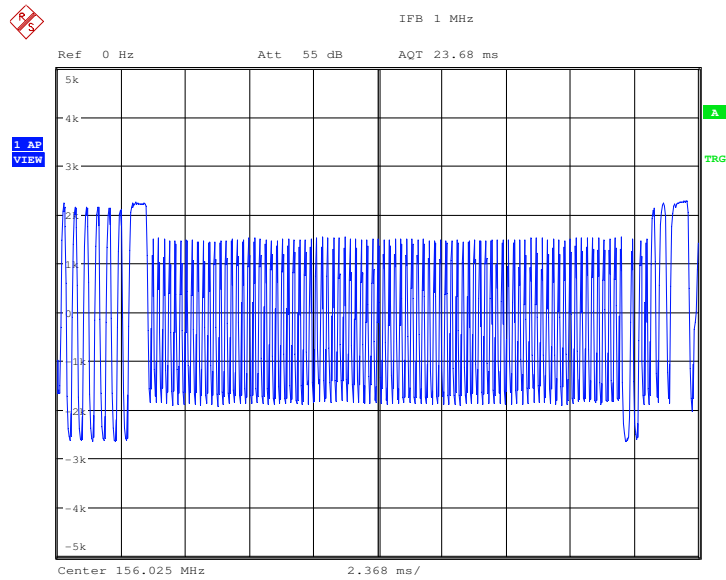

Date: 24.FEB.2011 11:29:34

TX2

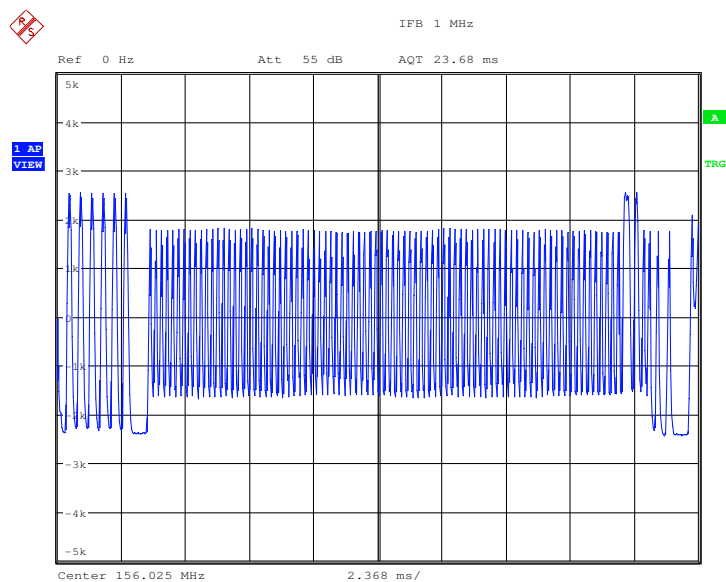


Date: 24.FEB.2011 11:35:33



Product Service


00001111

### TX1

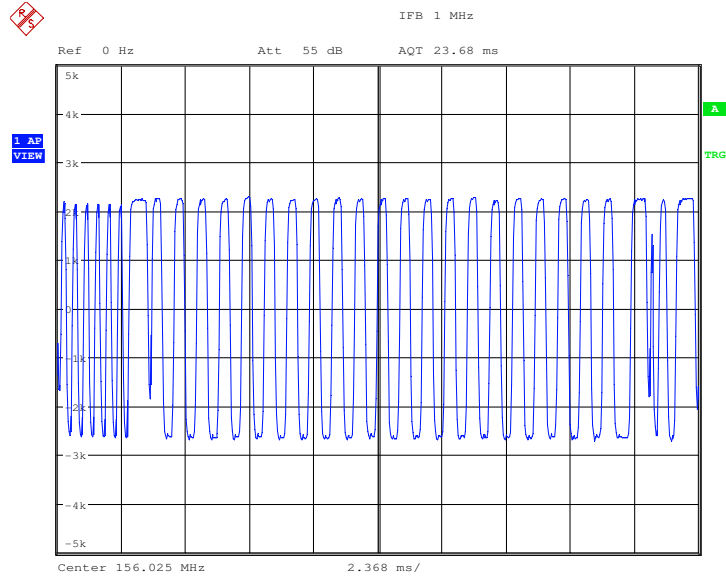

Date: 24.FEB.2011 11:32:22

### TX2

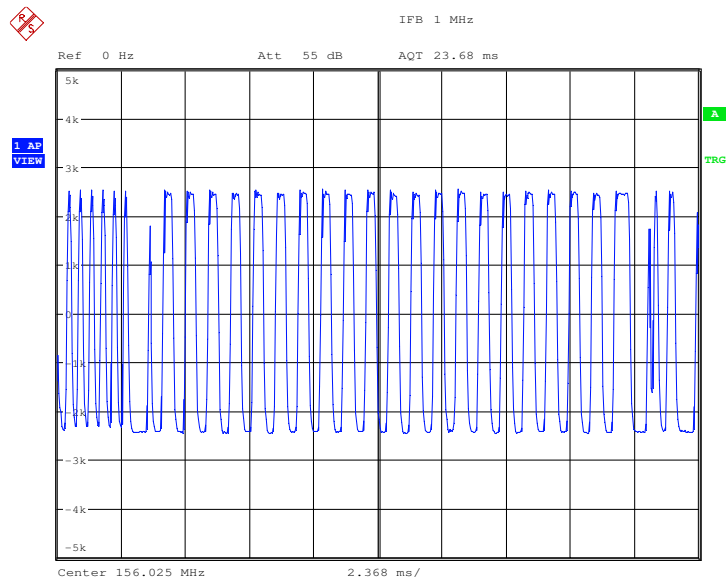


Date: 24.FEB.2011 11:42:29



Product Service


## PRBS

### TX1

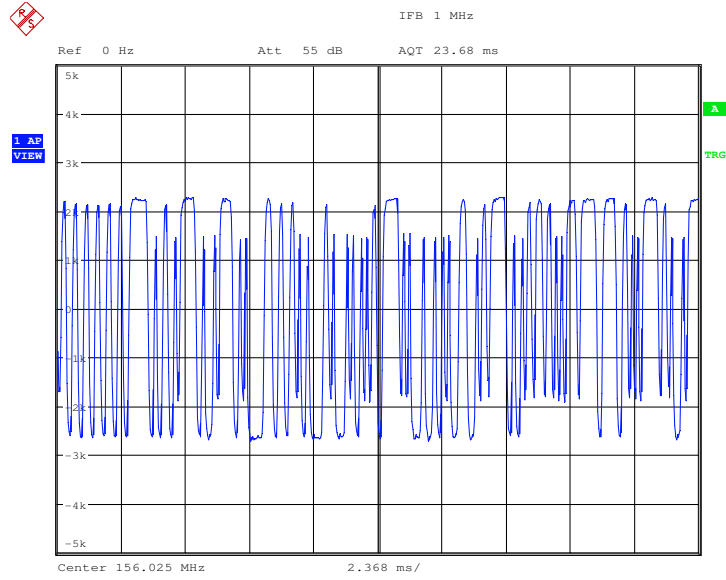

Date: 24.FEB.2011 11:33:47

### TX2

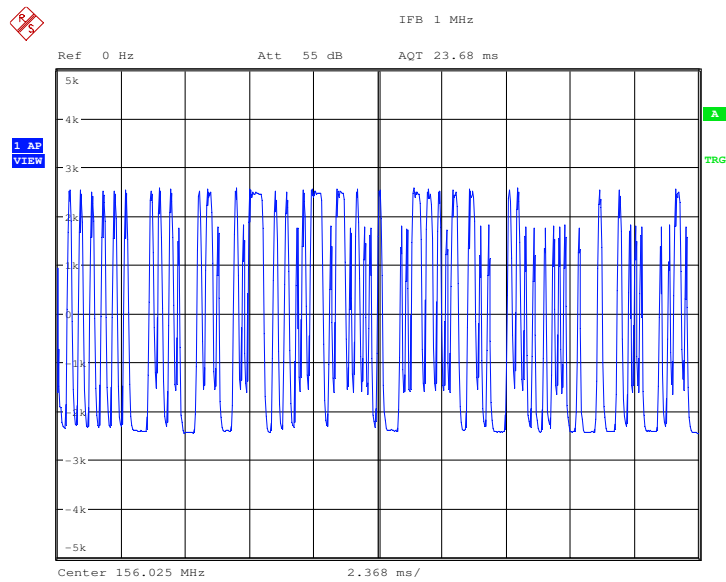

Date: 24.FEB.2011 11:44:04





Product Service

### Limit Clause

When phase or frequency modulation is used in the 156-162 MHz bands the peak modulation must be maintained between 75 and 100 percent. A frequency deviation of  $\pm 5$  kHz is defined as 100 percent peak modulation.

Ship and coast station transmitters operating in the 156-162 MHz and 216-220 MHz bands must be capable of proper operation with a frequency deviation that does not exceed  $\pm 5$  kHz.



Product Service

## **2.7 TRANSMITTER POWER**

### **2.7.1 Specification Reference**

FCC Part 80, Clause 80.215  
Industry Canada RSS-182, Clause 3.7, 3.9, 4.3 and 6.2

### **2.7.2 Equipment Under Test**

Cobalt: Class B AIS Unit, S/N: 10

### **2.7.3 Date of Test and Modification State**

14 January 2011 - Modification State 1

### **2.7.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.7.5 Environmental Conditions**

Ambient Temperature	23.0°C
Relative Humidity	39.0%

### **2.7.6 Test Procedure**

The EUT was connected to a spectrum analyser via a cable and a 30 dB attenuator. The EUT was set to transmit at maximum power with a modulated and un-modulated carrier. A resolution bandwidth of 1 MHz and a video bandwidth of 10 MHz were used using an RMS detector and average trace. The results are shown in the table on the following page.

### **2.7.7 Test Results**

12.2 V DC Supply



Product Service

Test Voltage	Frequency	TX No	Result (dBm)		Result (W)	
			Unmodulated	Modulated	Unmodulated	Modulated
V <sub>nom</sub> (12.2V)	156.025 MHz	TX1	33.23	33.20	2.104	2.089
		TX2	33.86	33.83	2.432	2.415
V <sub>FCC</sub> (13.7V)		TX1	33.23	33.20	2.104	2.089
		TX2	33.85	33.84	2.427	2.421
V <sub>nom</sub> (12.2V)	162.025 MHz	TX1	32.68	32.66	1.854	1.845
		TX2	33.33	33.33	2.153	2.153
V <sub>FCC</sub> (13.7V)		TX1	32.68	32.66	1.854	1.845
		TX2	33.34	33.32	2.158	2.147

For FCC the supply voltage must be between 12.2V and 13.7V.

Limit Clause

FCC:  $\geq 8$  and 25 W

RSS-182: The output power shall be within  $\pm 1.0$  dB of the manufacturer's rated power.



## 2.8 SUPPRESSION OF INTERFERENCE ABOARD SHIPS

### 2.8.1 Specification Reference

FCC Part 80, Clause 80.217 (b)

### 2.8.2 Equipment Under Test

Cobalt: Class B AIS Unit, S/N: 10

### 2.8.3 Date of Test and Modification State

21 February 2011 - Modification State 1

### 2.8.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.8.5 Environmental Conditions

Ambient Temperature 22.9°C  
Relative Humidity 30.6%

### 2.8.6 Test Procedure

The EUT was connected to a spectrum analyser via a 10 dB attenuator. The spectrum was measured between 9 kHz to 2 GHz. A resolution bandwidth of 100 kHz was used below 1 GHz and 1 MHz was used above 1 GHz. The traces were recorded as shown on the following pages.

### 2.8.7 Test Results

12 V DC Supply

AIS: RX1 and RX2: 156.025 MHz

Frequency of Interfering Emissions (MHz)	Power to Artificial Antenna ( $\mu$ W)	Power to Artificial Antenna (dBm)
9 kHz to 30 MHz	0.081	-40.93
30 MHz to 100 MHz	0.057	-42.47
100 MHz to 300 MHz	0.053	-42.73
300 MHz to 1000 MHz	0.056	-42.51
300 MHz to 2000 MHz	0.183	-37.37



Product Service

AIS: RX1 and RX2: 162.025 MHz

Frequency of Interfering Emissions (MHz)	Power to Artificial Antenna ( $\mu$ W)	Power to Artificial Antenna (dBm)
9 kHz to 30 MHz	0.082	-40.85
30 MHz to 100 MHz	0.049	-43.08
100 MHz to 300 MHz	0.055	-42.56
300 MHz to 1000 MHz	0.061	-42.16
300 MHz to 2000 MHz	0.184	-37.35

DSC: RX1 and RX2: 156.525 MHz

Frequency of Interfering Emissions (MHz)	Power to Artificial Antenna ( $\mu$ W)	Power to Artificial Antenna (dBm)
9 kHz to 30 MHz	0.066	-41.79
30 MHz to 100 MHz	0.053	-42.75
100 MHz to 300 MHz	0.064	-41.93
300 MHz to 1000 MHz	0.059	-42.28
300 MHz to 2000 MHz	0.211	-36.75




Product Service

## RX1 and RX2


### 156.025 MHz

### 9 KHz to 30 MHz

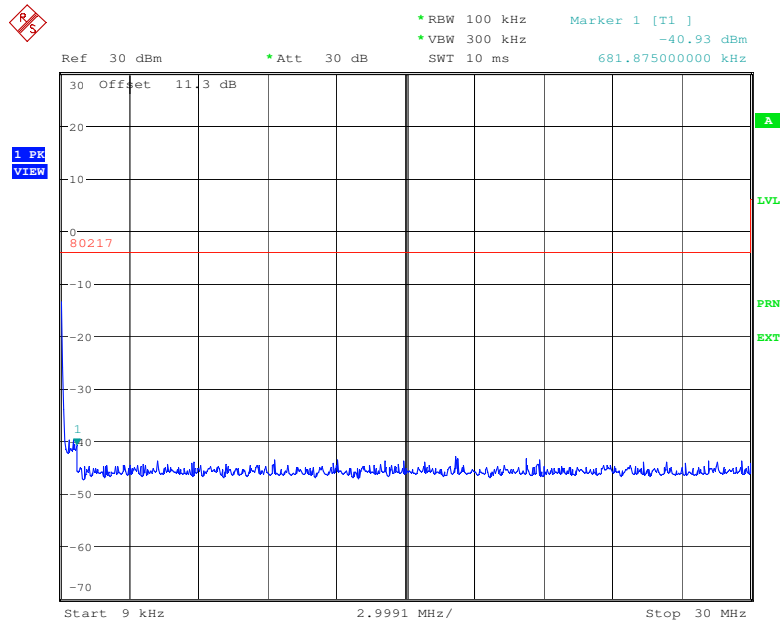

Date: 21.FEB.2011 15:00:00

### 30 MHz to 100 MHz

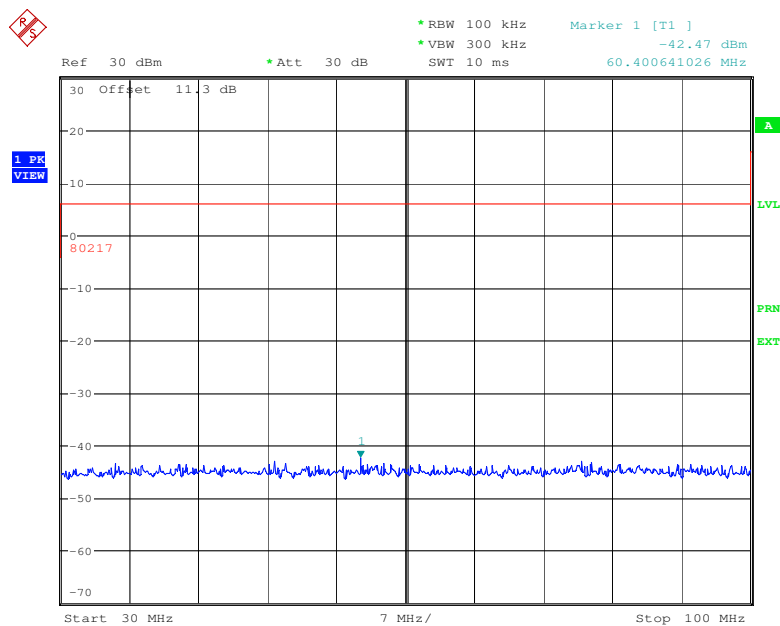


Date: 21.FEB.2011 15:06:56




Product Service

### 100 MHz to 300 MHz

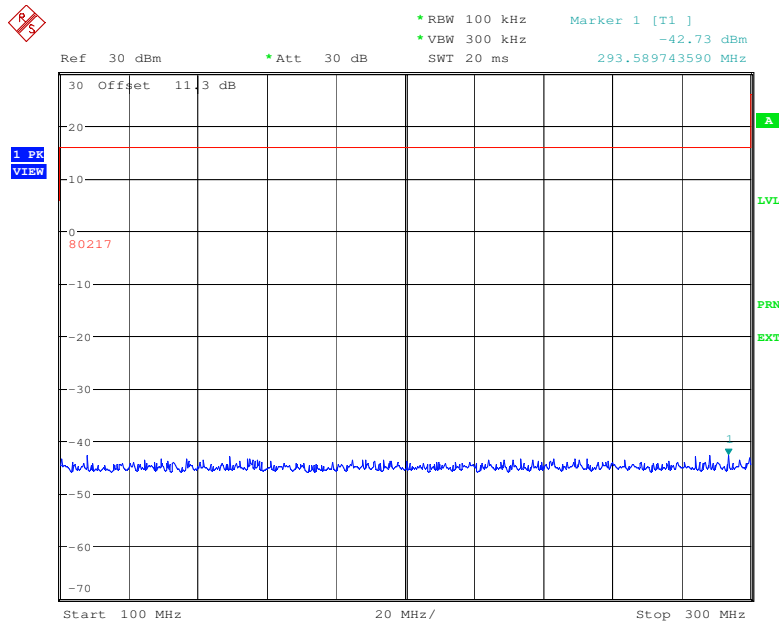

Date: 21.FEB.2011 15:09:14

### 300 MHz to 1000 MHz

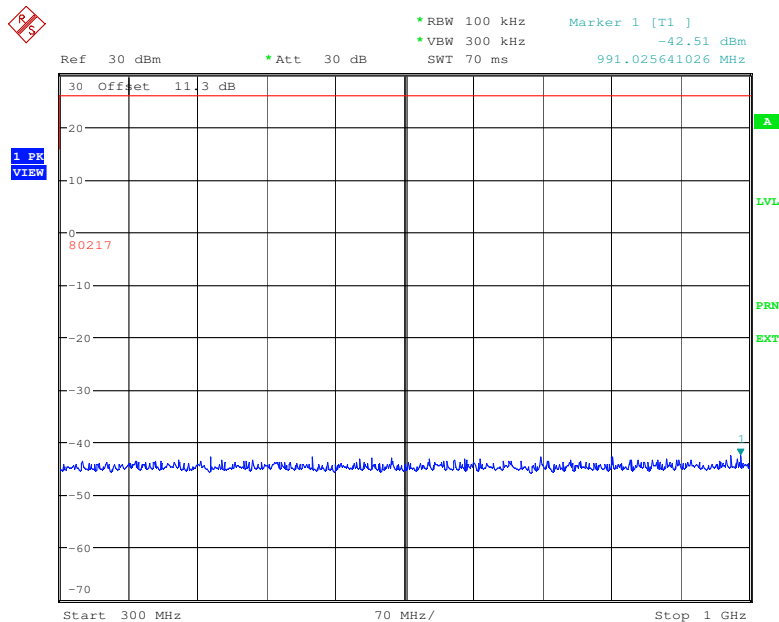


Date: 22.FEB.2011 10:16:50



Product Service


### 300 MHz to 2000 MHz

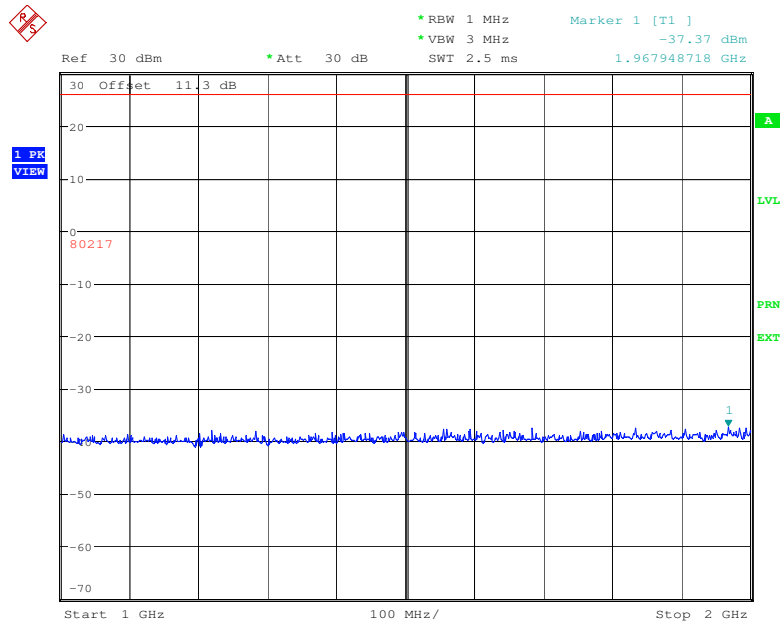

Date: 21.FEB.2011 15:15:55

### 162.025 MHz

### 9 KHz to 30 MHz

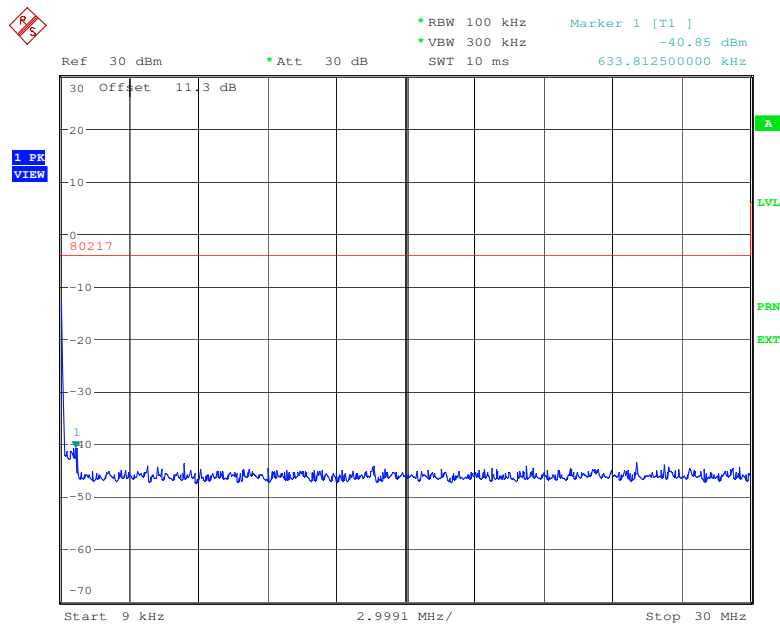


Date: 21.FEB.2011 15:02:24






Product Service

### 30 MHz to 100 MHz

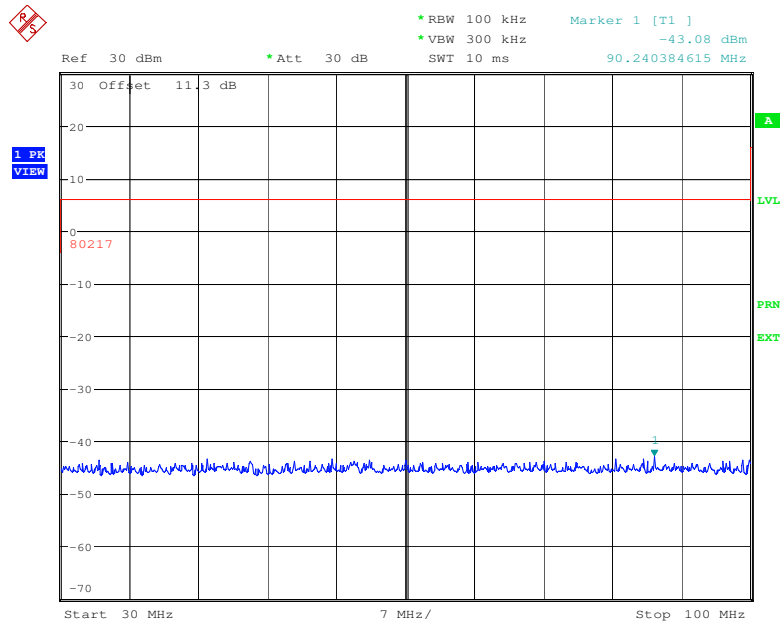

Date: 21.FEB.2011 15:04:05

### 100 MHz to 300 MHz

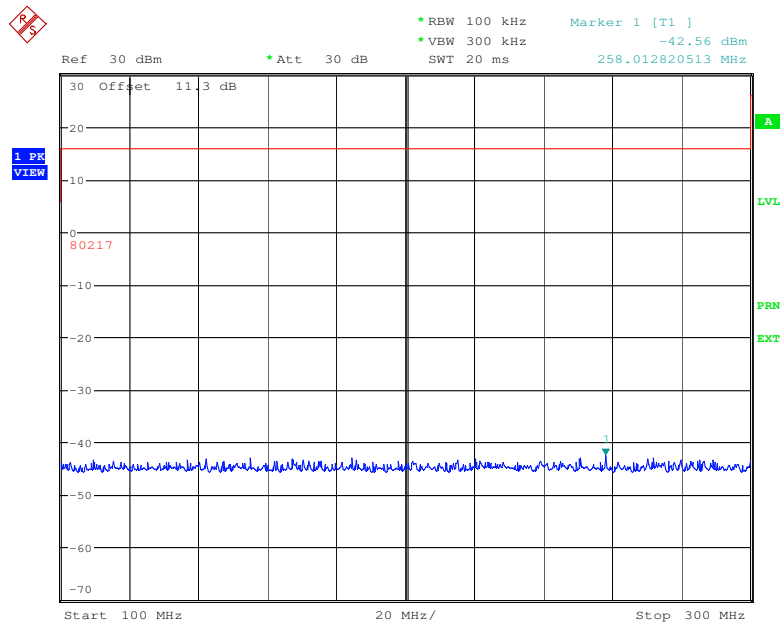


Date: 21.FEB.2011 15:11:15




Product Service

### 300 MHz to 1000 MHz

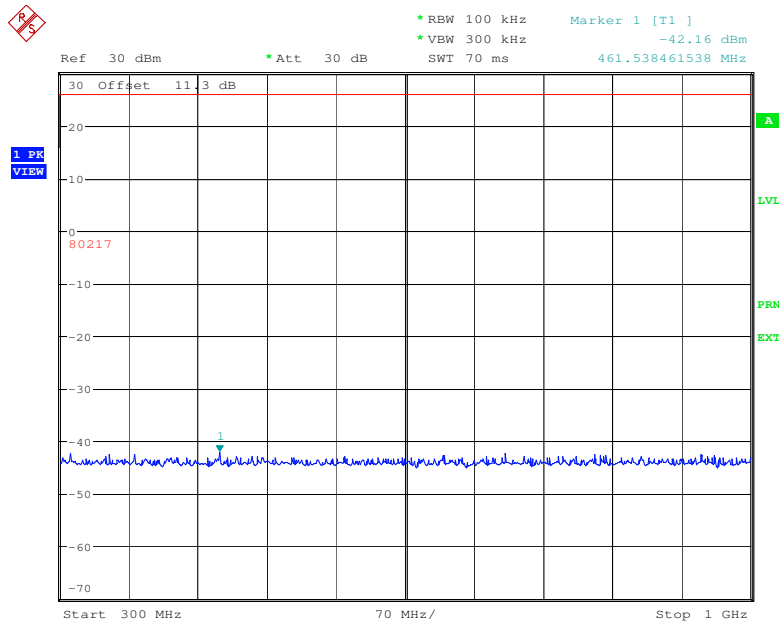

Date: 22.FEB.2011 10:20:57

### 300 MHz to 2000 MHz

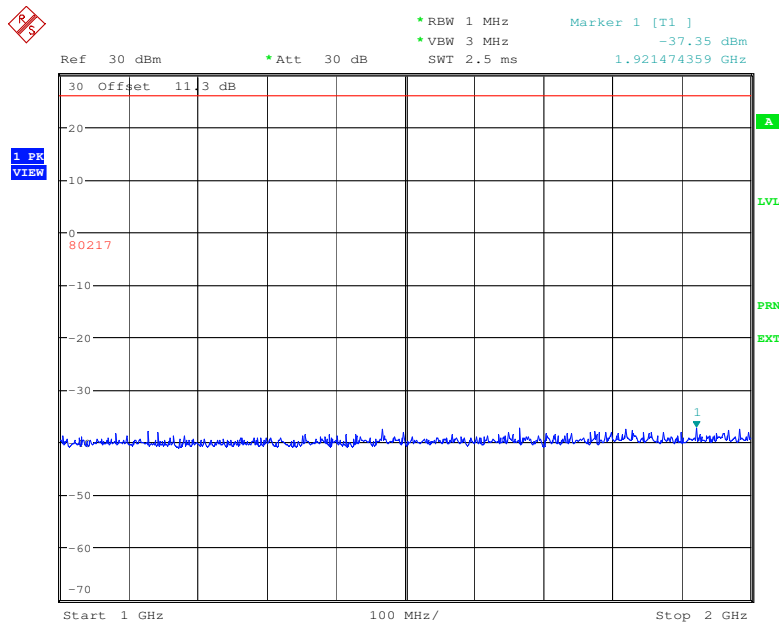


Date: 21.FEB.2011 15:12:45



Product Service


### 156.525 MHz

### 9 KHz to 30 MHz

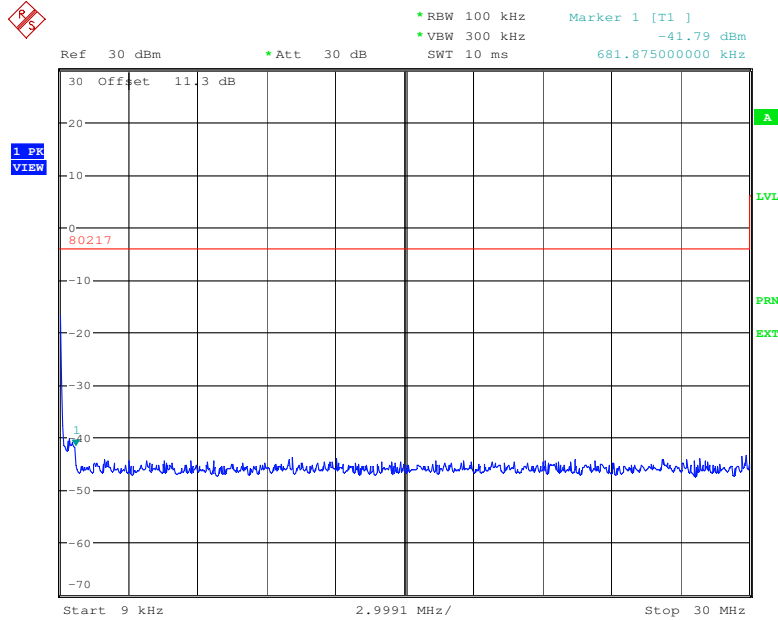

Date: 22.FEB.2011 10:00:39

### 30 MHz to 100 MHz

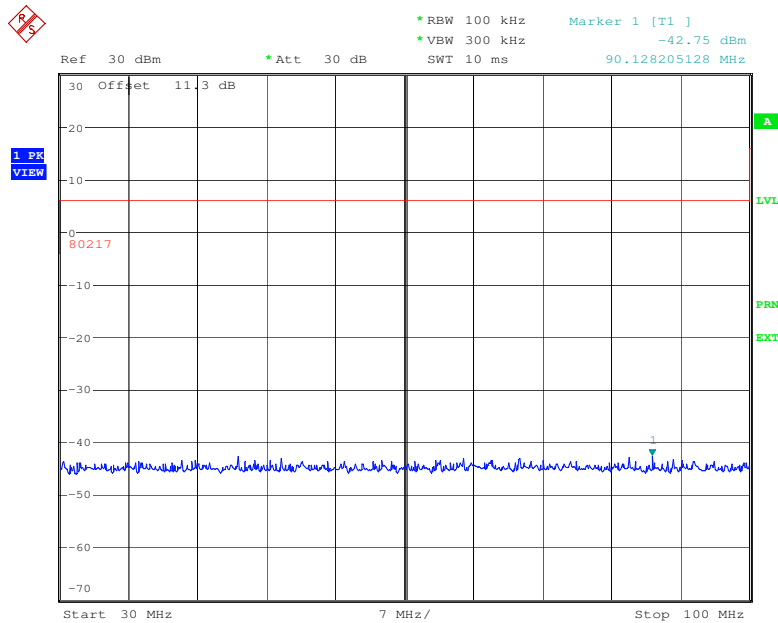


Date: 22.FEB.2011 10:03:37




Product Service

### 100 MHz to 300 MHz

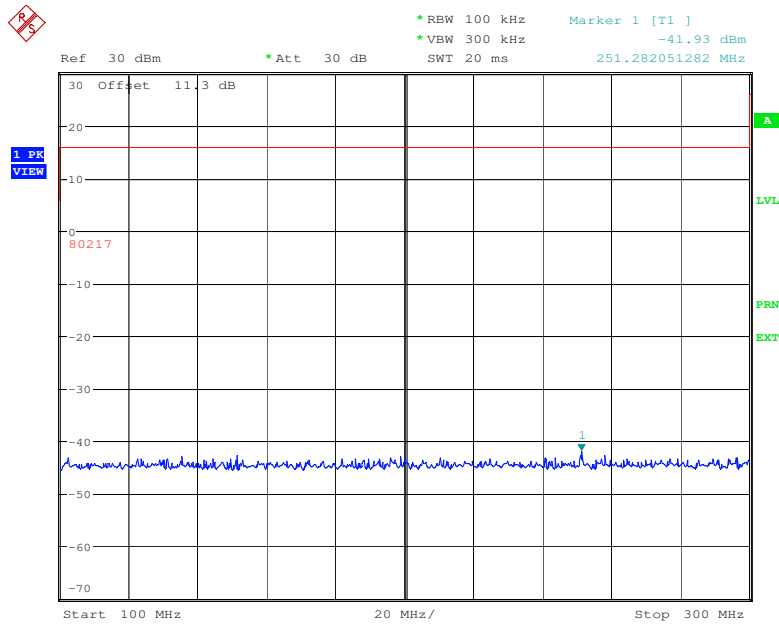

Date: 22.FEB.2011 10:06:33

### 300 MHz to 1000 MHz

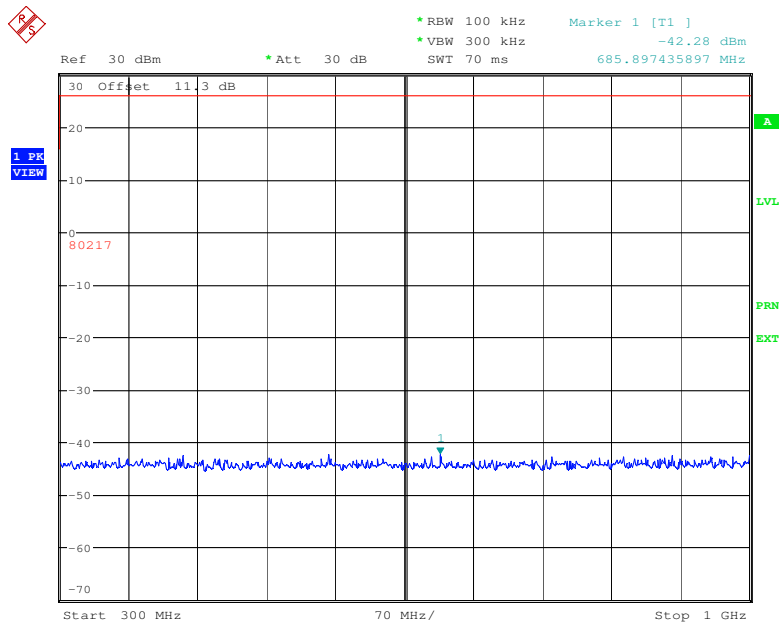


Date: 22.FEB.2011 10:10:31



Product Service

300 MHz to 2000 MHz

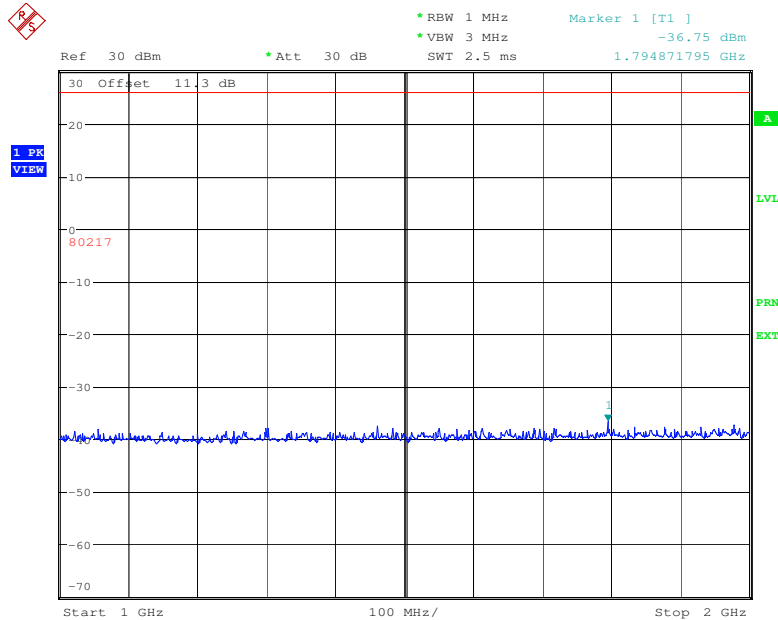

Date: 22.FEB.2011 09:57:41

Remarks

No antenna gain was included in the measurement result due to the significant margin from the limit line.

Limit Clause

The EUT shall deliver not more than the following amounts of power, to an artificial antenna having electrical characteristics equivalent to those of the average receiving antenna(s) use on shipboard:

Frequency of interfering emissions	Power to artificial antenna in $\mu\text{W}$
Below 30 MHz	400
30 to 100 MHz	4,000
100 to 300 MHz	40,000
Over 300 MHz	400,000



## 2.9 TRANSMITTER CARRIER POWER REDUCTION

### 2.9.1 Specification Reference

FCC Part 80, Clause 80.215 (e)(g)(1)(2)(3)  
Industry Canada RSS-182, Clause 3.7

### 2.9.2 Equipment Under Test

Cobalt: Class B AIS Unit, S/N: 10

### 2.9.3 Date of Test and Modification State

14 January 2011 - Modification State 1

### 2.9.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.9.5 Environmental Conditions

Ambient Temperature 24.0°C  
Relative Humidity 39.0%

### 2.9.6 Test Procedure

The EUT will never be used on channels 156.375 MHz, 156.650 MHz, 156.775 MHz or 156.825 MHz, as declared by the manufacturer.

### 2.9.7 Test Results

12V DC Supply

Frequency	TX No	Default Power (W)	Manual Override to 25 W Possible (Yes / No)
156.025 MHz	TX1	33.50	No
	TX2	32.98	No
162.025 MHz	TX1	33.54	No
	TX2	33.03	No

#### Limit Clause

All transmit and remote control units must be capable of reducing the carrier power to 1 W or less.

All transmitters must automatically reduce the carrier power to 1W or less when transmitting on to 156.375 MHz or 156.650 MHz, and must be provided with a manual override switch which when held by an operator will permit full carrier power operation on 156.375 MHz and 156.650 MHz.



Product Service

All transmitters must be capable of tuning to 156.775 MHz and 156.825 MHz and must automatically reduce the carrier power to 1W or less, with no manual override capability, when the transmitter is tuned to either 156.775 MHz or 156.825 MHz.



Product Service

## **2.10 TRANSMITTER FREQUENCY DEVIATION**

### **2.10.1 Specification Reference**

FCC Part 80, Clause 80.213 (a)(2)  
Industry Canada RSS-182, Clause 3.4 (b)

### **2.10.2 Equipment Under Test**

Cobalt: Class B AIS Unit, S/N: 10

### **2.10.3 Date of Test and Modification State**

27 January 2011 - Modification State 1

### **2.10.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.10.5 Environmental Conditions**

Ambient Temperature	23.0°C
Relative Humidity	17.0%

### **2.10.6 Test Procedure**

The EUT was configured to transmit three different packet data loads at maximum power. These were 11110000, 10101010 and PRBS. The maximum deviation was recorded using the modulation analysis function on the spectrum analyser.

### **2.10.7 Test Results**

12 V DC Supply






Product Service

156.025 MHz


101010

TX1

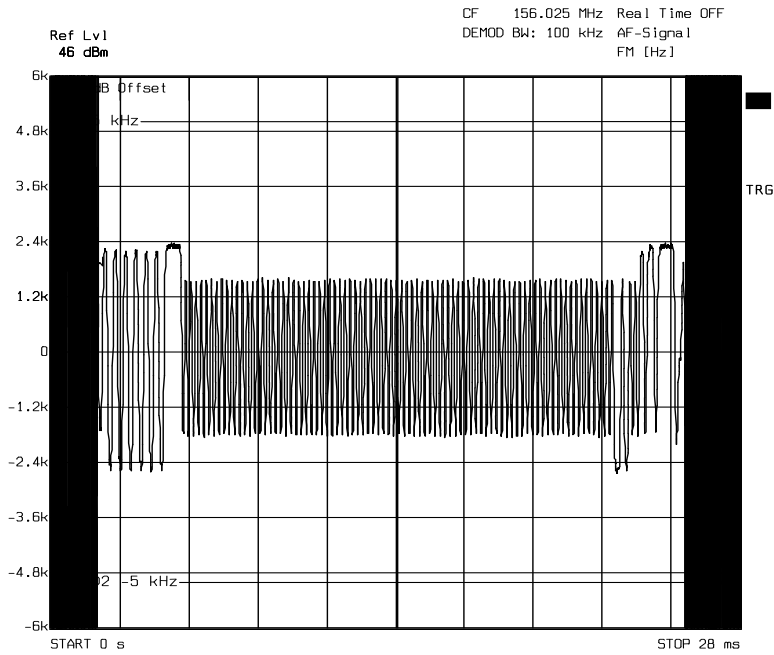

Date: 27.JAN.2011 16:10:18

TX2

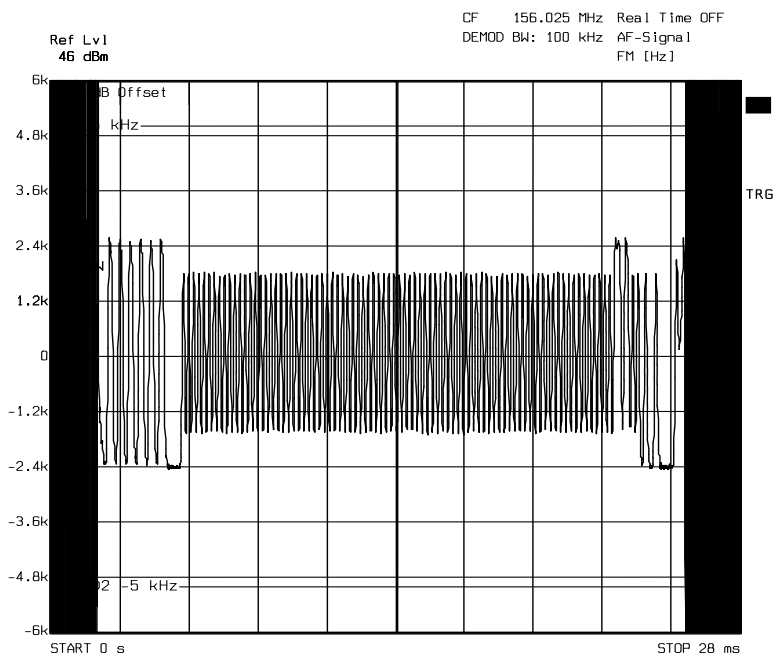


Date: 27.JAN.2011 16:13:10




Product Service

00001111

TX1

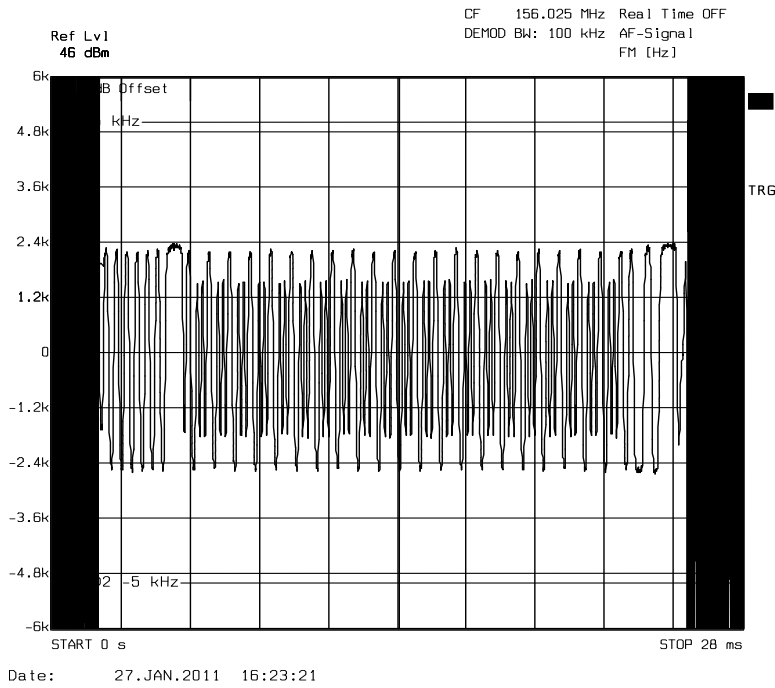

TX2

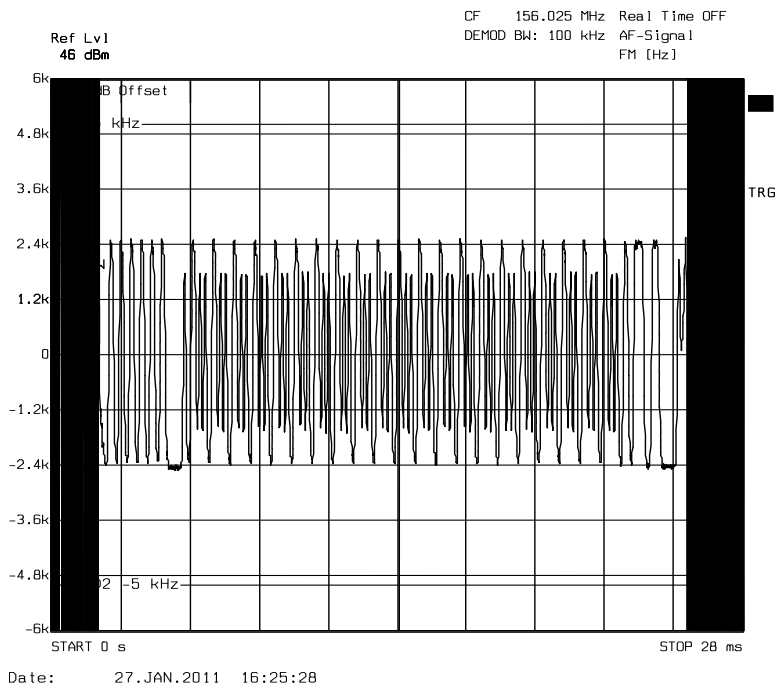





Product Service

## PRBS

### TX1

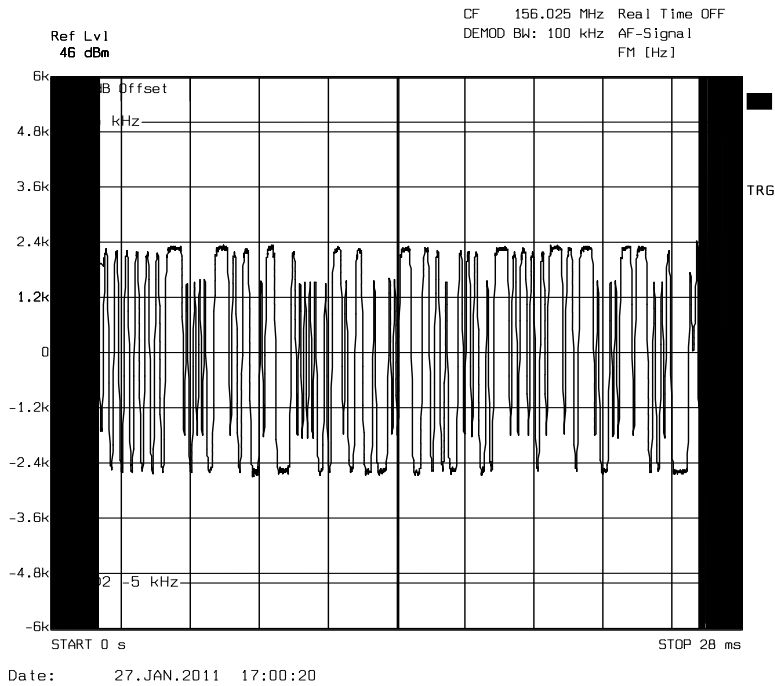

### TX2

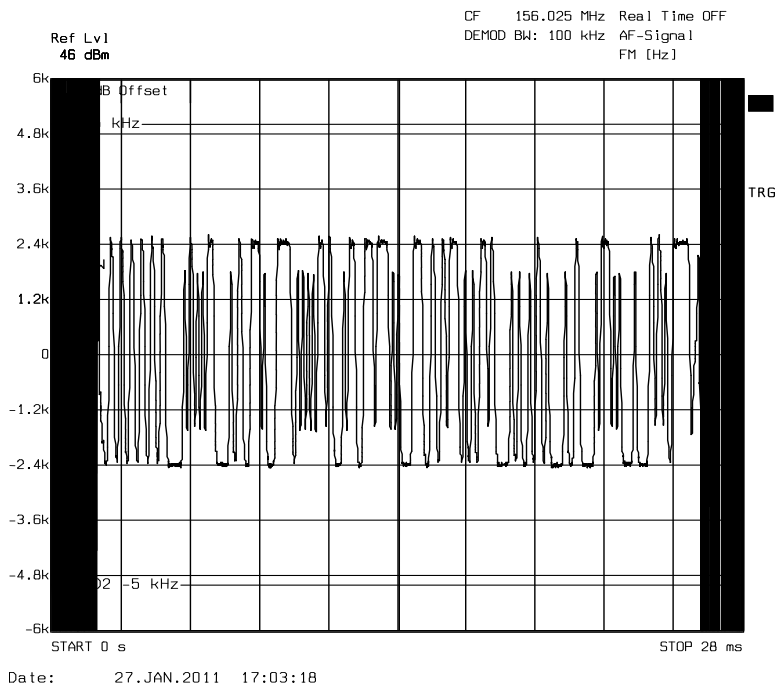




Product Service

162.025 MHz


101010

TX1

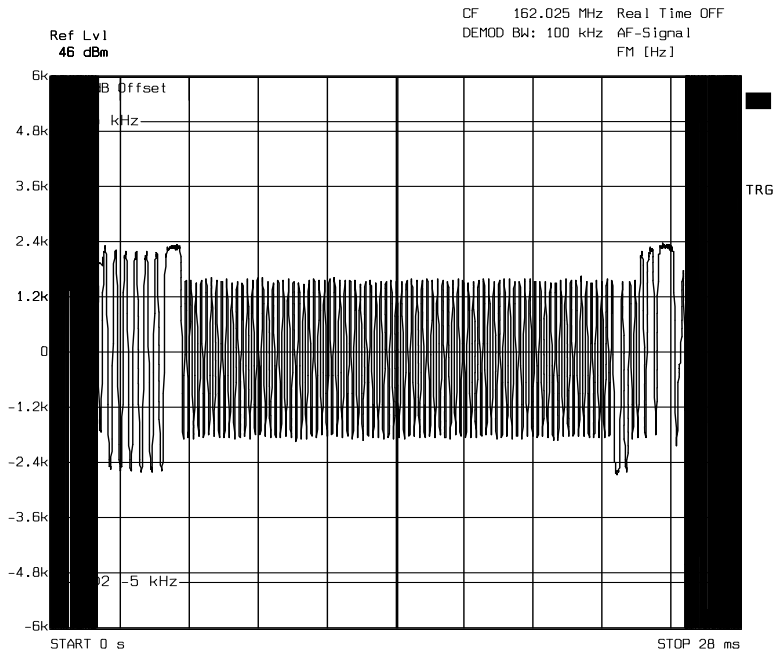

Date: 27.JAN.2011 16:15:16

TX2

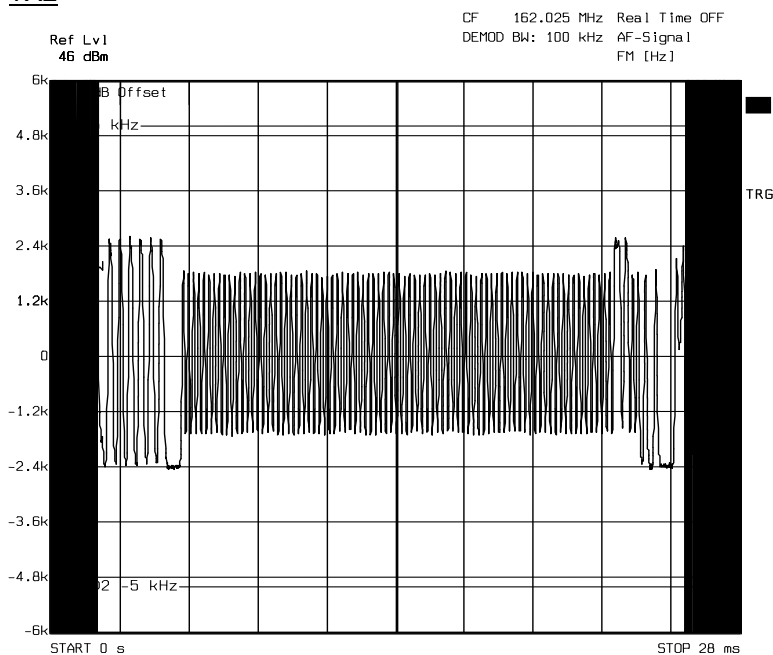


Date: 27.JAN.2011 16:17:13




Product Service

00001111

TX1

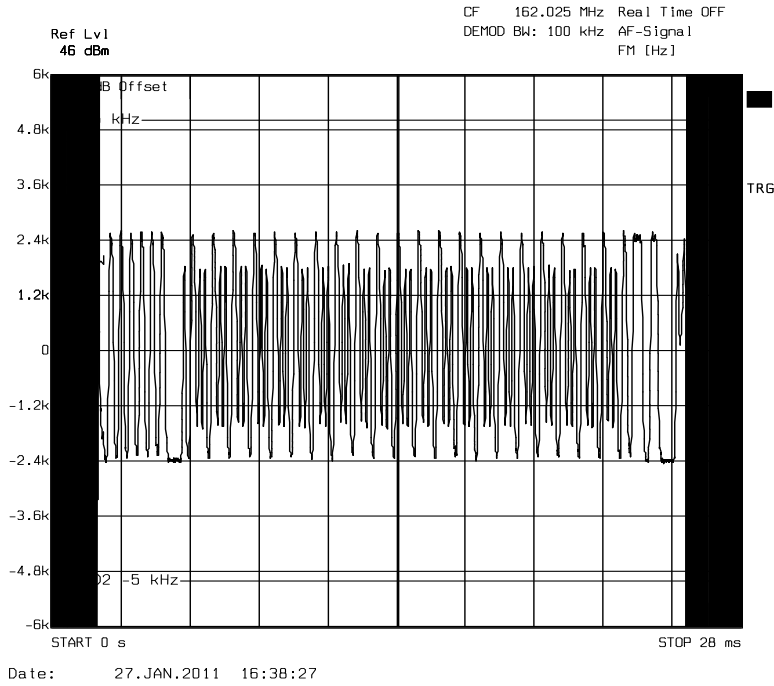

TX2

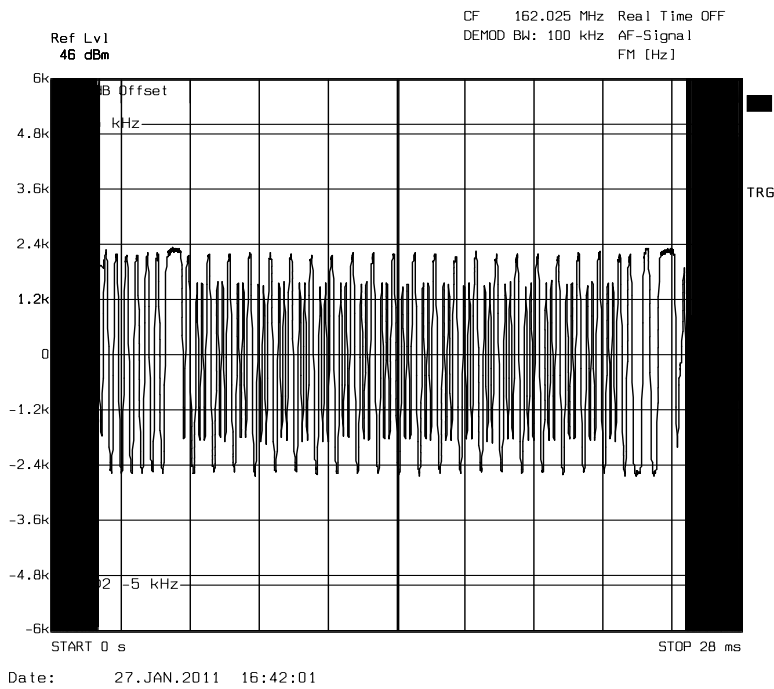





Product Service

## PRBS

### TX1

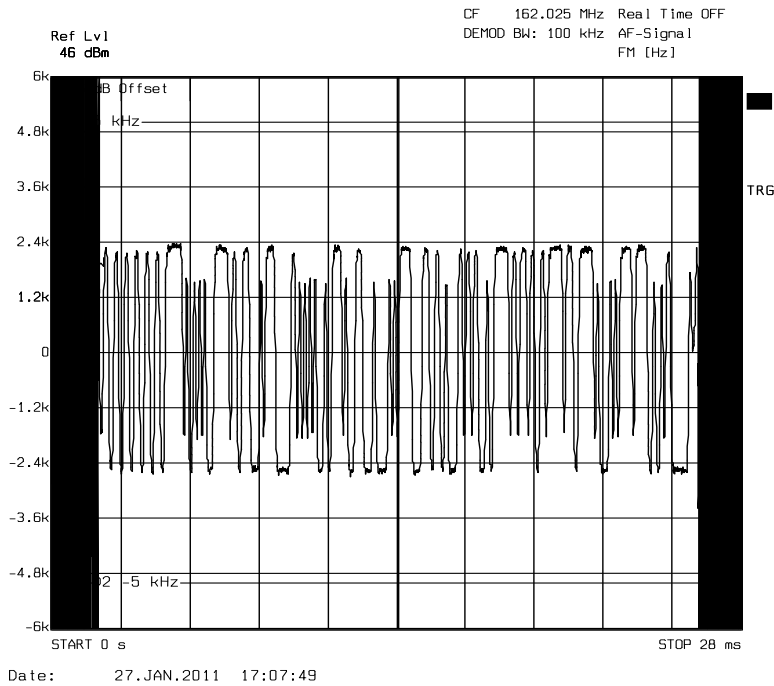

### TX2

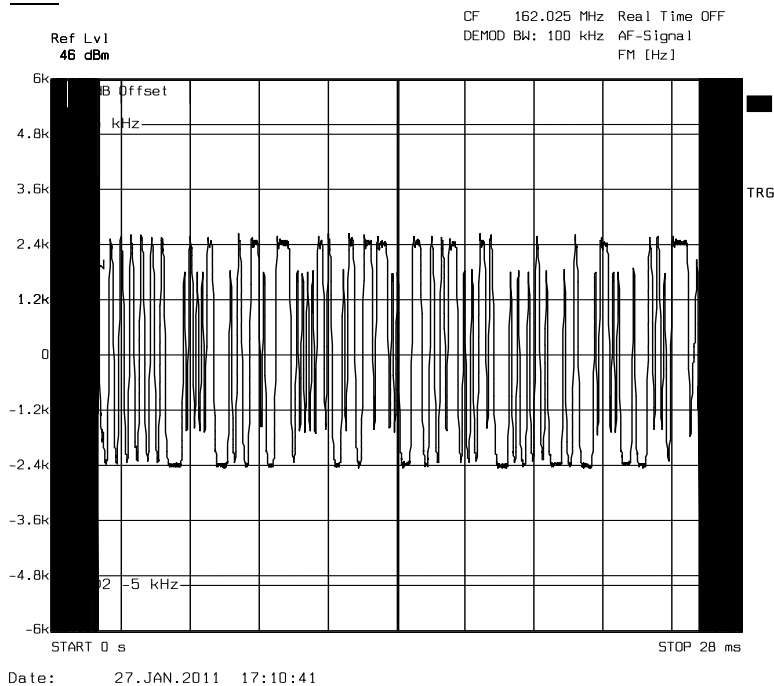

### Limit Clause

The frequency deviation corresponding to 100% modulation shall approach  $\pm 5$  kHz as nearly as practicable. In no event shall the frequency deviation exceed  $\pm 5$  KHz.



Product Service

## **SECTION 3**

### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 and 2.2 - Frequency Tolerance under Voltage Variations and Transmitter Frequency Tolerance</b>					
Dual programmable power supply	Thurlby	T-1000	418	-	TU
Multimeter	Fluke	79 Series III	611	12	22-Jun-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	9-Mar-2011
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	12-Nov-2011
Hygrometer	Rotronic	I-1000	2891	12	27-Apr-2011
Attenuator (30dB/50W)	Aeroflex / Weinschel	47-30-34	3164	12	1-Dec-2011
<b>Section 2.3 - Occupied Bandwidth</b>					
Dual Power Supply Unit	Hewlett Packard	6253A	292	-	O/P Mon
Dual programmable power supply	Thurlby	T-1000	418	-	TU
Multimeter	Fluke	75 Mk3	455	12	5-Jan-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	26-Mar-2011
1GHz Digital Oscilloscope	Lecroy	9370M	612	12	19-Oct-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	9-Mar-2011
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	12-Nov-2011
Hygrometer	Rotronic	I-1000	2891	12	27-Apr-2011
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	12-Aug-2011
Attenuator (10dB, 20W)	Lucas Weinschel	1	3225	12	13-Oct-2011
Power Divider	Weinschel	1506A	3345	12	29-Apr-2011
Attenuator (10dB, 150W)	Narda	769-10	3368	12	24-May-2011
Logic Level Shifter	Andy Blagg	0V to 10V to TTL Interface	3584	-	O/P Mon
<b>Section 2.4 – Emission Limitations (Emission Mask)</b>					
Dual Power Supply Unit	Hewlett Packard	6253A	292	-	O/P Mon
Dual programmable power supply	Thurlby	T-1000	418	-	TU
Multimeter	Fluke	75 Mk3	455	12	5-Jan-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	26-Mar-2011
1GHz Digital Oscilloscope	Lecroy	9370M	612	12	19-Oct-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	9-Mar-2011
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	12-Nov-2011
Hygrometer	Rotronic	I-1000	2891	12	27-Apr-2011
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	12-Aug-2011
Attenuator (10dB, 20W)	Lucas Weinschel	1	3225	12	13-Oct-2011
Power Divider	Weinschel	1506A	3345	12	29-Apr-2011
Attenuator (10dB, 150W)	Narda	769-10	3368	12	24-May-2011
Logic Level Shifter	Andy Blagg	0V to 10V to TTL Interface	3584	-	O/P Mon





Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.5 - Emission Limitations (Conducted Transmitter Spurious)</b>					
Dual Power Supply Unit	Hewlett Packard	6253A	292	-	O/P Mon
Dual programable power supply	Thurlby	T-1000	418	-	TU
Multimeter	Fluke	75 Mk3	455	12	5-Jan-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	26-Mar-2011
1GHz Digital Oscilloscope	Lecroy	9370M	612	12	19-Oct-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	9-Mar-2011
High Pass Filter	Mini-Circuits	NHP-300	1640	12	12-Aug-2011
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	12-Nov-2011
Hygrometer	Rotronic	I-1000	2891	12	27-Apr-2011
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	12-Aug-2011
Attenuator (10dB, 20W)	Lucas Weinschel	1	3225	12	13-Oct-2011
Power Divider	Weinschel	1506A	3345	12	29-Apr-2011
Attenuator (10dB, 150W)	Narda	769-10	3368	12	24-May-2011
Logic Level Shifter	Andy Blagg	0V to 10V to TTL Interface	3584	-	O/P Mon
<b>Section 2.6 - Modulation Characteristics</b>					
Dual programmable power supply	Thurlby	T-1000	418	-	TU
Multimeter	Fluke	75 Mk3	455	12	5-Jan-2012
Crystal Detector (Pos O/P )	ASL (TUV)	RAB1	479	-	TU
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	9-Mar-2011
Hygrometer	Rotronic	I-1000	2891	12	27-Apr-2011
Attenuator (10dB, 20W)	Lucas Weinschel	1	3225	12	13-Oct-2011
Power Divider	Weinschel	1506A	3345	12	29-Apr-2011
Attenuator (10dB, 150W)	Narda	769-10	3368	12	24-May-2011
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	23-Feb-2012
Logic Level Shifter	Andy Blagg	0V to 10V to TTL Interface	3584	-	O/P Mon
<b>Section 2.7 – Transmitter Power</b>					
Signal Generator	Rohde & Schwarz	SMY 01	118	12	28-Jun-2011
Dual programmable power supply	Thurlby	T-1000	418	-	TU
Multimeter	Fluke	79 Series III	611	12	22-Jun-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	9-Mar-2011
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	12-Nov-2011
Hygrometer	Rotronic	I-1000	2891	12	27-Apr-2011
Attenuator (30dB/50W)	Aeroflex / Weinschel	47-30-34	3164	12	1-Dec-2011
<b>Section 2.8 - Suppression of Interference Aboard Ships</b>					
Dual programmable power supply	Thurlby	T-1000	418	-	TU
Multimeter	Fluke	75 Mk3	455	12	5-Jan-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	26-Mar-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	9-Mar-2011
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	12-Nov-2011
Hygrometer	Rotronic	I-1000	2891	12	27-Apr-2011
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	12-Aug-2011
<b>Section 2.9 - Transmitter Carrier Power Reduction</b>					
Signal Generator	Rohde & Schwarz	SMY 01	118	12	28-Jun-2011
Dual programmable power supply	Thurlby	T-1000	418	-	TU
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	9-Mar-2011
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	12-Nov-2011
Hygrometer	Rotronic	I-1000	2891	12	27-Apr-2011
Attenuator (30dB/50W)	Aeroflex / Weinschel	47-30-34	3164	12	1-Dec-2011



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.10 - Transmitter Frequency Deviation</b>					
Dual programmable power supply	Thurlby	T-1000	418	-	TU
Multimeter	Fluke	75 Mk3	455	12	5-Jan-2012
Multimeter	Fluke	79 Series III	611	12	22-Jun-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	9-Mar-2011
Hygrometer	Rotronic	I-1000	2891	12	27-Apr-2011
Attenuator (30dB/50W)	Aeroflex / Weinschel	47-30-34	3164	12	1-Dec-2011
Spectrum Analyser	Rohde & Schwarz	FSEA30	S/N: 841557/009	12	19-Aug-2011

TU – Traceability Unscheduled

OP MON – Output Monitored with Calibrated Equipment



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of  
TÜV SÜD Product Service Limited

© 2011 TÜV SÜD Product Service Limited