



Product Service

---

Choose certainty.  
Add value.

# Report On

FCC and Industry Canada DFS Testing of the  
Frontier Silicon Ltd Minuet/FS5332  
In accordance with FCC 47 CFR Part 15E and  
Industry Canada RSS-247

COMMERCIAL-IN-CONFIDENCE

FCC ID: YYX-FS5332  
IC: 11458A-FS5332

Document 75934517 Report 06 Issue 1

August 2016



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

FCC and Industry Canada DFS Testing of the  
Frontier Silicon Ltd Minuet/FS5332  
In accordance with FCC 47 CFR Part 15E and  
Industry Canada RSS-247

Document 75934517 Report 06 Issue 1

August 2016


**PREPARED FOR**

Frontier Silicon Ltd  
137 Euston Road  
London  
NW1 2AA

**PREPARED BY**

  
**Natalie Bennett**  
Senior Administrator, Project Support

**APPROVED BY**

  
**Nic Forsyth**  
Authorised Signatory

**DATED**

03 August 2016

---

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15E and Industry Canada RSS-247. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

  
M Russell





## CONTENTS

<b>Section</b>	<b>Page No</b>
<b>1 REPORT SUMMARY .....</b>	<b>3</b>
1.1 Introduction .....	4
1.2 Test Requirements .....	5
1.3 Brief Summary of Results .....	6
1.4 Application Form .....	7
1.5 Product Information .....	10
1.6 Test Conditions .....	10
1.7 Deviations from the Standard .....	10
1.8 Modification Record .....	10
1.9 DFS Test System .....	11
<b>2 TEST DETAILS .....</b>	<b>13</b>
2.1 Calibration of Test Setup .....	14
2.2 In-Service Monitoring .....	24
<b>3 TEST EQUIPMENT USED .....</b>	<b>35</b>
3.1 Test Equipment Used .....	36
3.2 Support Test Equipment .....	37
3.3 Measurement Uncertainty .....	38
<b>4 PHOTOGRAPHS .....</b>	<b>39</b>
4.1 Test Set-Up Photographs .....	40
4.2 DFS Test Equipment .....	40
<b>5 ACCREDITATION, DISCLAIMERS AND COPYRIGHT .....</b>	<b>41</b>
5.1 Accreditation, Disclaimers and Copyright .....	42



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

FCC and Industry Canada DFS Testing of the  
Frontier Silicon Ltd Minuet/FS5332

In accordance with FCC 47 CFR Part 15E and Industry Canada RSS-247



## 1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC and Industry Canada DFS Testing of the Frontier Silicon Ltd Minuet/FS5332 to the requirements of FCC 47 CFR Part 15E and Industry Canada RSS-247.

Objective	To perform FCC DFS Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Frontier Silicon Ltd
Model Number(s)	Minuet/FS5332
Serial Number(s)	RAD108618 (Module) & RAD108363 (Platform)
Hardware Version	Rev6
Software Version	NS1.0.13
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15E (2015) Industry Canada RSS-247 (Issue 1, 2015)
Incoming Release Date	Application Form 27 June 2016
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	FS160438
Date	8 April 2016
Start of Test	9 June 2016
Finish of Test	9 June 2016
Name of Engineer(s)	M Russell
Related Document(s)	KDB 905462 D02 v01r01



## 1.2 TEST REQUIREMENTS

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidths modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
<b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		



### 1.3 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15E and Industry Canada RSS-247 is shown below.

Section	Specification Clause		Test Description	Result	Comments/Base Standard
	Part 15E	RSS-247			
802.11a					
2.1	NA	-	Calibration of Test Setup	Pass	
2.2	15.407 (h)(2)(iii)(iv)	6.3	In-Service Monitoring	Pass	
802.11n 40 MHz Bandwidth					
2.1	NA	-	Calibration of Test Setup	Pass	
2.2	15.407 (h)(2)(iii)(iv)	6.3	In-Service Monitoring	Pass	
802.11ac 80 MHz Bandwidth					
2.1	NA	-	Calibration of Test Setup	Pass	
2.2	15.407 (h)(2)(iii)(iv)	6.3	In-Service Monitoring	Pass	



## 1.4 APPLICATION FORM

EQUIPMENT DESCRIPTION	
Model Name/Number	Minuet/FS5332
Part Number	HA-FS5332-xxxxxx (where xxxxxx denotes the customer variant eg HA-FS5332-000001)
Hardware Version	Rev6
Software Version	NS1.0.13
FCC ID	YYX-FS5332
Industry Canada ID	11458A-FS5332
Technical Description (Please provide a brief description of the intended use of the equipment)	Minuet is a module, which when installed in a consumer audio product enables high-quality audio streaming over Wi-Fi, Bluetooth and Ethernet.

TYPE OF EQUIPMENT	
<input type="checkbox"/> Master	
<input type="checkbox"/> Client with Radar Detection	
<input checked="" type="checkbox"/> Client without Radar Detection	
<input type="checkbox"/> Wi-Fi Direct Support	

TRANSMITTER TECHNICAL CHARACTERISTICS	
FREQUENCY CHARACTERISTICS	
<input checked="" type="checkbox"/> 5.150 GHz to 5.250 GHz	
<input checked="" type="checkbox"/> 5.250 GHz to 5.350 GHz	
<input checked="" type="checkbox"/> 5.470 GHz to 5.725 GHz	
<input checked="" type="checkbox"/> 5.725 GHz to 5.825 GHz	
<input type="checkbox"/> Please confirm the EUT does not operate in the frequency band 5600 – 5650 MHz	
<input type="checkbox"/> Off Channel CAC Implemented	
Off Channel CAC within 5600 – 5650 MHz band	hours, (1 – 24)
Off Channel CAC outside 5600 – 5650 MHz band	minutes, (6 – 240)
Note: DFS is not required in the ranges 5.15 – 5.25 GHz and 5.725 – 5.825 GHz	



Product Service

TRANSMITTER RF POWER CHARACTERISTICS		
Maximum rated transmitter output power as stated by manufacturer		
Conducted Power	13 dBm	
Maximum Antenna Gain	4.6 dBi	
EIRP	17.6 dBm	
Minimum rated transmitter output power as stated by manufacturer (if applicable)		
Conducted Power	5 dBm	
Maximum Antenna Gain	4.6 dBi	
EIRP	9.6 dBm	
Is TPC supported?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
If Yes, provide a description of operation.		
Maximum EIRP = 17.6 dBm, Minimum EIRP = 9.6 dBm		

POWER SOURCE		
<input type="checkbox"/> AC mains supply	State voltage	
AC supply frequency	(Hz)	VAC
<input checked="" type="checkbox"/> DC supply		
Nominal voltage	5V	

SYSTEM ARCHITECTURE		
<input checked="" type="checkbox"/> Frame Based		
<input type="checkbox"/> IP Based		
<input type="checkbox"/> Other	If other please state	
<input checked="" type="checkbox"/> 802.11(a)	Receiver Bandwidth:	20 MHz
<input checked="" type="checkbox"/> 802.11(n) – 20 MHz	Receiver Bandwidth:	20 MHz
<input checked="" type="checkbox"/> 802.11(n) – 40 MHz	Receiver Bandwidth:	40 MHz
<input checked="" type="checkbox"/> 802.11(ac) – 20 MHz	Receiver Bandwidth:	20 MHz
<input checked="" type="checkbox"/> 802.11(ac) – 40 MHz	Receiver Bandwidth:	40 MHz
<input checked="" type="checkbox"/> 802.11(ac) – 80 MHz	Receiver Bandwidth:	80 MHz

DECLARATION		
No parameter or information relating to the detected radar waveforms is available or accessible to the end user.		
<input checked="" type="checkbox"/> True	<input type="checkbox"/>	False

MISCELLANEOUS (Master Device Only)		
Power-on cycle time*		
* Time from switching on the UUT to the point at which Channel Availability Check (CAC) commences		

UNIFORM SPREADING (Master Device Only)		
Describe how the meter provides, on aggregate, uniform channel loading of the spectrum across all channels.		



Product Service

ANTENNA OPTIONS	
<b>Antenna 1</b>	
Antenna Description:	PCB Antenna
Antenna Model:	SW700M (SW750M)
Antenna Maximum Gain:	2.39GHz-2.5GHz=2.3dBi (Max.) and 5.15GHz-5.85GHz=4.6dBi(Max.)
Antenna Frequency Range:	2.39GHz-2.5GHz and 5.15GHz-5.85GHz
<b>Antenna 2</b>	
Antenna Description:	PCB Antenna
Antenna Model:	RFPICA431223IMLB301
Antenna Maximum Gain:	2.39GHz-2.5GHz=1.9dBi (Max.) and 5.15GHz-5.85GHz=4.3dBi(Max.)
Antenna Frequency Range:	2.4GHz-2.5GHz and 5.15GHz-5.85GHz
<b>Antenna 3</b>	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	
<b>Antenna 4</b>	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	
<b>Antenna 5</b>	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	

I hereby declare that the information supplied is correct and complete.

Name: Abdul Wahed Dewan Position held: RF Principal Engineer  
 Date: 27/06/2016



## 1.5 PRODUCT INFORMATION

### 1.5.1 Technical Description

The Equipment Under Test (EUT) was a Frontier Silicon Ltd Minuet/FS5332. A full technical description can be found in the manufacturer's documentation.

The EUT is a Client without Radar Detection device.

The following is provided by the applicant as part of the FCC filing:

- A complete User's Manual and/or Professional Installers Manual.
- A Statement of Conformity for the Client in Non-Associated mode is required. The Form 731 application must include a Cover Letter Attachment stating that the client software and associated drivers will not initiate any transmission on DFS frequencies without initiation by a master. This includes restriction on transmissions for beacons and support for ad-hoc peer-to-peer modes.
- A channel/frequency plan for the device showing the channels that have active scanning or passive scanning. Active scanning is where the device can transmit a probe (beacon) and passive scanning is where the device can listen only without probes.
- Software security description.

## 1.6 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. See individual test clauses.

The EUT was powered from a 5.00 V DC supply.

FCC Measurement Facility Registration Number  
90987 Octagon House, Fareham Test Laboratory

Industry Canada Company Address Code  
IC2932B-1 Octagon House, Fareham Test Laboratory

## 1.7 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard were made during testing.

## 1.8 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



## 1.9 DFS TEST SYSTEM

The DFS system consists of hardware and software. The Hardware uses a PXI chassis with PXI instruments populating the chassis. The instruments used are a Vector Signal Generator, a Digitiser, Frequency References and a Dual Core PC. The measurement and analysis software runs on the PC and controls the instruments within the mainframe via commands on the PXI bus. Various markers are contained within the generated waveforms. The markers are used to trigger the measurement system at the appropriate points. An external trigger is also provided at the SMB output on the Vector Signal Generator which is employed where a Spectrum Analyser is used in place of the Aeroflex Digitiser. These are described within the test procedure for the applicable test.

The Aeroflex DFS software generates the pulses in accordance with KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r01.

### Short Pulse Radar Test Waveform

The short pulse radar simulation is a conventional amplitude pulse with varying pulse widths, pulse rate intervals (PRI) and number of pulses. General characteristics for these types and number of repetitions required by the standard are as follows:

Radar Type	Pulse Width (usec)	PRI (usec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\lceil \frac{1}{(360)(19 - 10^6)} \right\rceil_{\text{PRI}_{\mu\text{sec}}}$	60%	30
		Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	-		
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

### Long Pulse Radar Test Waveform

Radar Type	Pulse Width (usec)	Chirp Width (MHz)	PRI (usec)	Number of Pulses per burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30



Product Service

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC and Industry Canada DFS Testing of the  
Frontier Silicon Ltd Minuet/FS5332

In accordance with FCC 47 CFR Part 15E and Industry Canada RSS-247



Product Service

## 2.1 CALIBRATION OF TEST SETUP

### 2.1.1 Specification Reference

FCC 47 CFR Part 15E  
Industry Canada RSS-247

### 2.1.2 Equipment Under Test and Modification State

Minuet/FS5332 S/N: RAD108618 (Module) & RAD108363 (Platform) - Modification State 0

### 2.1.3 Date of Test

9 June 2016

### 2.1.4 Environmental Conditions

Ambient Temperature	21.7°C
Relative Humidity	32.7%



### 2.1.5 Test Results

#### 802.11a

In this test equipment configuration, Radar signals are injected at the Master. The configuration ensures that the Radar pulses are received only by the Master device and not the Client. To calibrate the Radar pulses, the master was replaced by a Spectrum Analyser. The required Radar Waveform, (Type 0), was loaded into the Arbitrary Waveform Generator. The Spectrum Analyser was set to zero Span and the RBW and VBW set to 3MHz. The sweep time was set to display the entire burst and triggered on the Radar Burst. The output level of the Radar Signal Generator was adjusted to give the correct level as defined in the table below with the 1dB correction accounted for. Trace data showing the used Radar Pulses was recorded.


#### DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (Notes 1 and 2)
$\geq 200$ milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

#### Test Equipment Setup

##### Setup for Client with injection at the Master

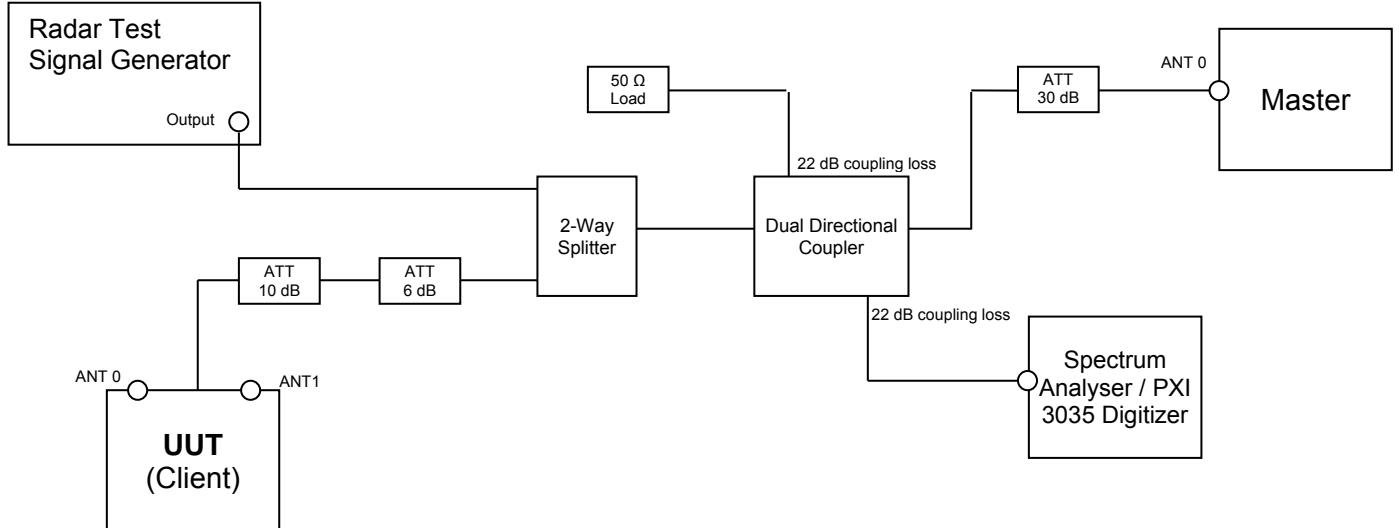



Product Service


### Radar Pulse Type 0

#### Short Radar Pulse Characteristics

Radar Type	Pulse Width (μs)	PRI (μs)	Number of Pulses
0	1	1428	18

#### Client without Radar Detection


#### Radar Type 0 Plot

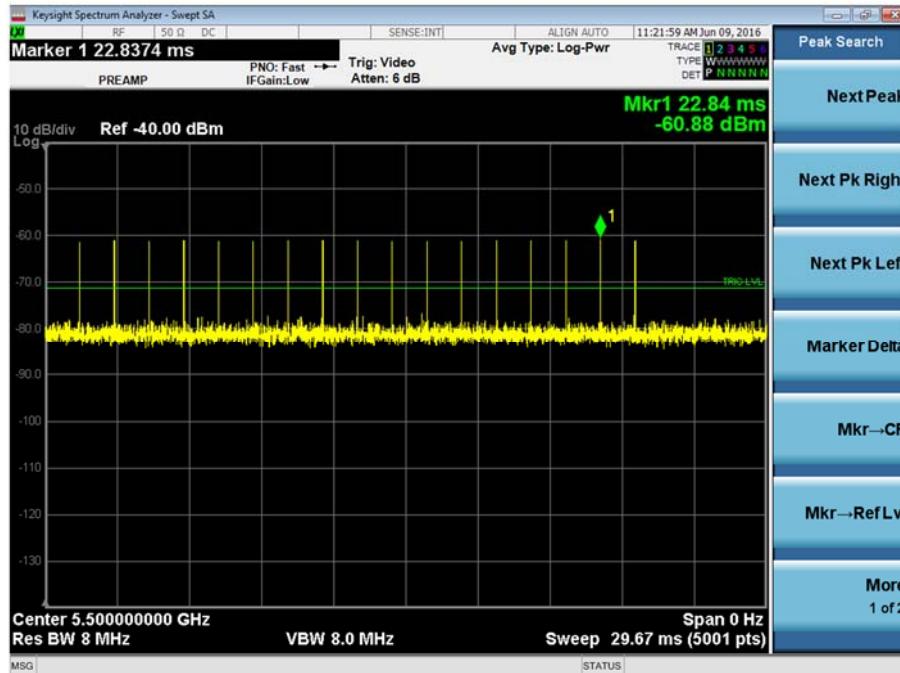



Product Service

### Channel Loading Plot

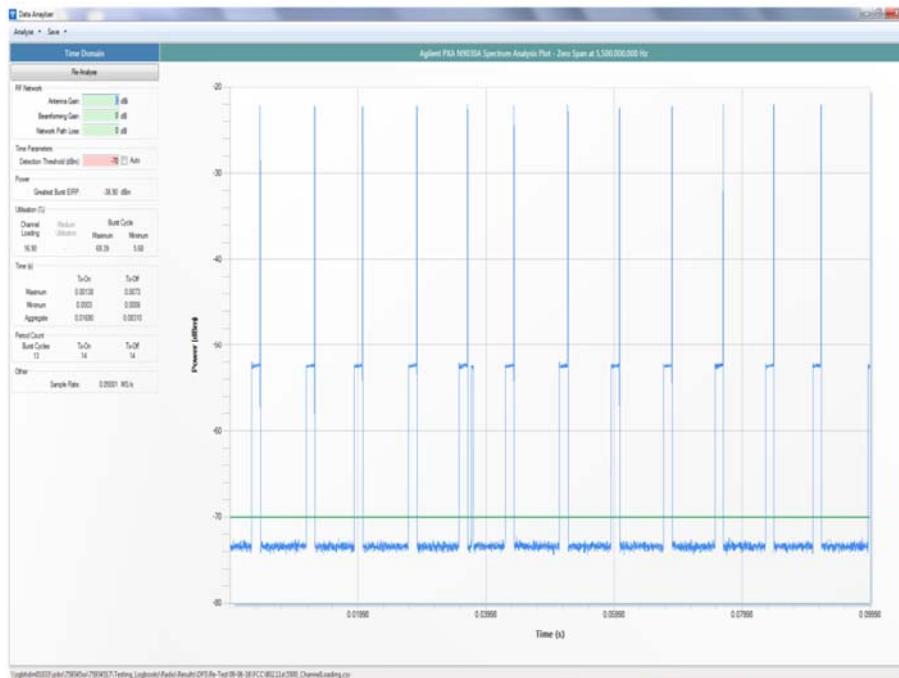

FCC KDB 905462 D02 New Rules v02 specifies that the system is to be loaded using means that is typical for the device. In this case this was audio streaming using the FCC designated test file 5\_GHz\_Audio\_Test\_file.WAV. However, due to the bandwidth available and the low demand of an audio stream, the channel loading of 17% could not be achieved. Lower data rates were used to increase the channel loading as much as possible.



### 802.11ac 80 MHz Bandwidth

In this test equipment configuration, Radar signals are injected at the Master. The configuration ensures that the Radar pulses are received only by the Master device and not the Client. To calibrate the Radar pulses, the master was replaced by a Spectrum Analyser. The required Radar Waveform, (Type 0), was loaded into the Arbitrary Waveform Generator. The Spectrum Analyser was set to zero Span and the RBW and VBW set to 3MHz. The sweep time was set to display the entire burst and triggered on the Radar Burst. The output level of the Radar Signal Generator was adjusted to give the correct level as defined in the table below with the 1dB correction accounted for. Trace data showing the used Radar Pulses was recorded.


### DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (Notes 1 and 2)
$\geq 200$ milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

### Test Equipment Setup

#### Setup for Client with injection at the Master

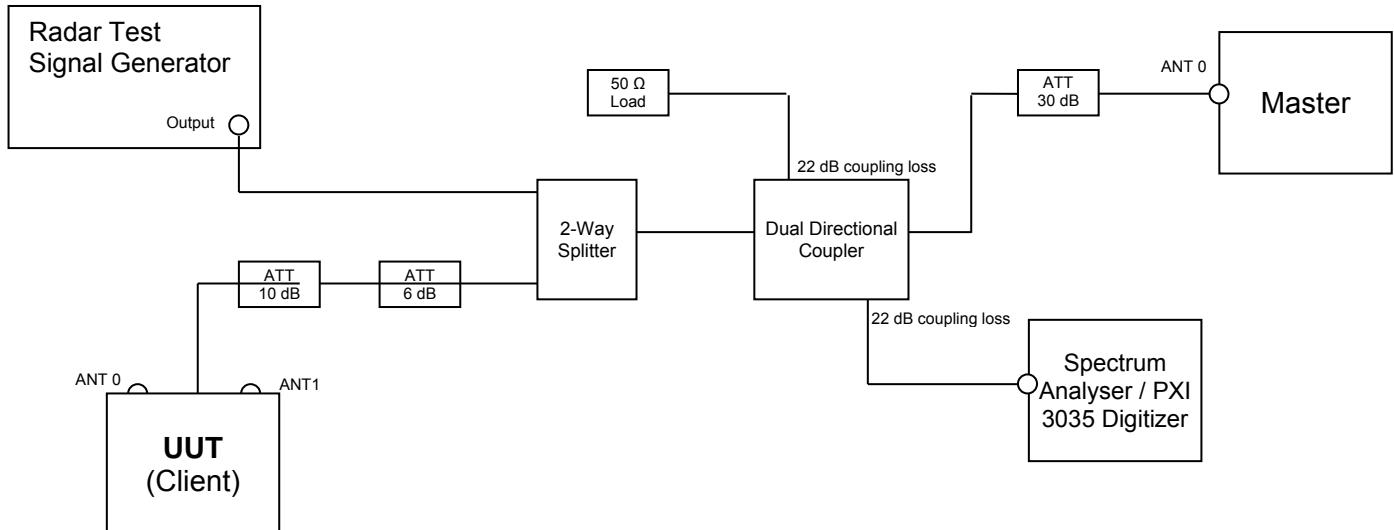




## Radar Pulse Type 0

### Short Radar Pulse Characteristics

Radar Type	Pulse Width (μs)	PRI (μs)	Number of Pulses
0	1	1428	18

### Client without Radar Detection


#### Radar Type 0 Plot

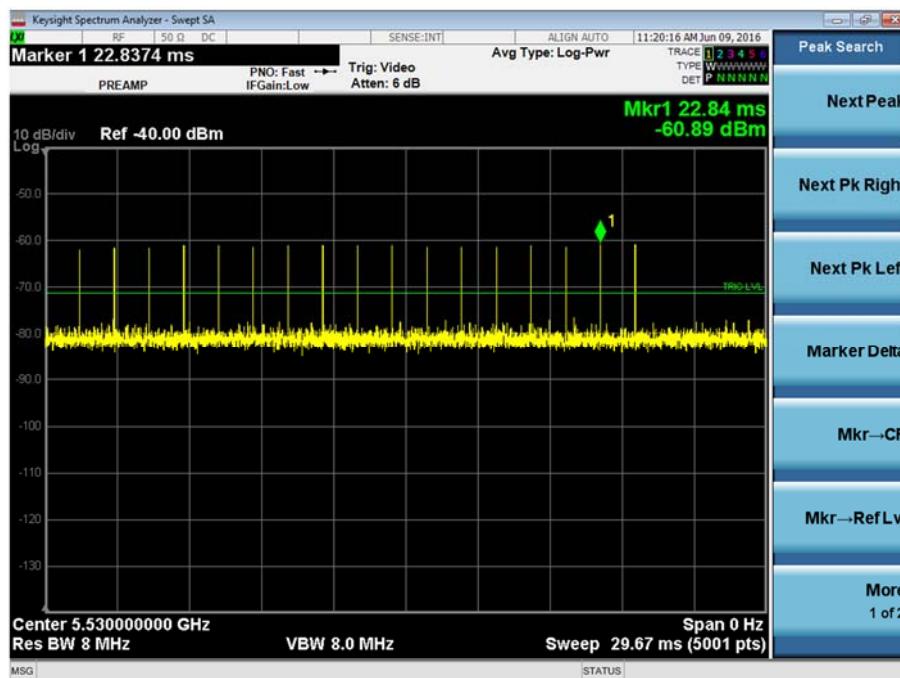



Product Service

### Channel Loading Plot

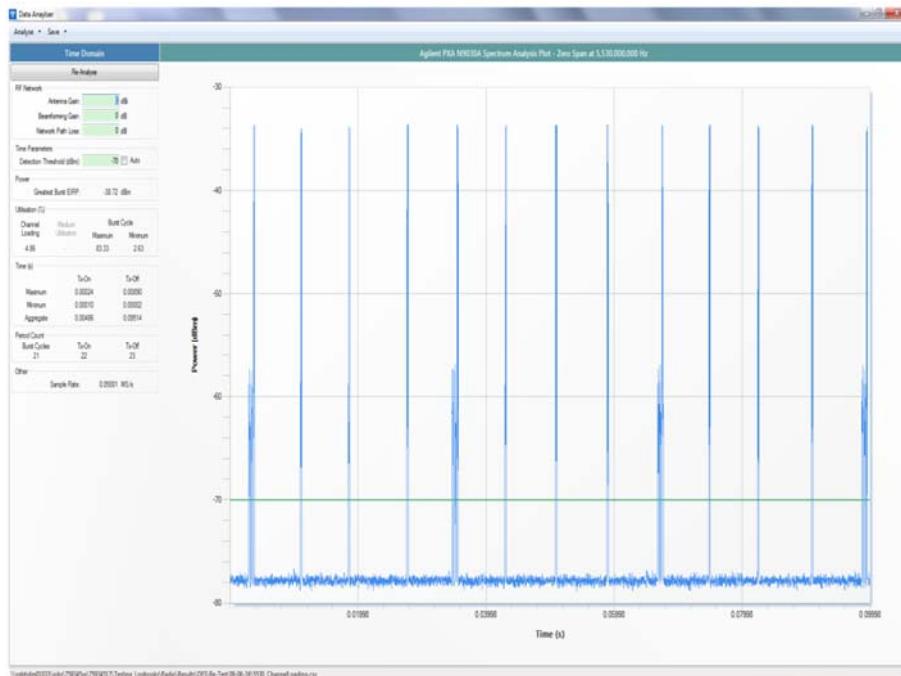

FCC KDB 905462 D02 New Rules v02 specifies that the system is to be loaded using means that is typical for the device. In this case this was audio streaming using the FCC designated test file 5\_GHz\_Audio\_Test\_file.WAV. However, due to the bandwidth available and the low demand of an audio stream, the channel loading of 17% percent could not be achieved. Lower data rates were used to increase the channel loading as much as possible.



### 802.11n 40 MHz Bandwidth

In this test equipment configuration, Radar signals are injected at the Master. The configuration ensures that the Radar pulses are received only by the Master device and not the Client. To calibrate the Radar pulses, the master was replaced by a Spectrum Analyser. The required Radar Waveform, (Type 0), was loaded into the Arbitrary Waveform Generator. The Spectrum Analyser was set to zero Span and the RBW and VBW set to 3MHz. The sweep time was set to display the entire burst and triggered on the Radar Burst. The output level of the Radar Signal Generator was adjusted to give the correct level as defined in the table below with the 1dB correction accounted for. Trace data showing the used Radar Pulses was recorded.


### DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (Notes 1 and 2)
$\geq 200$ milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

### Test Equipment Setup

#### Setup for Client with injection at the Master

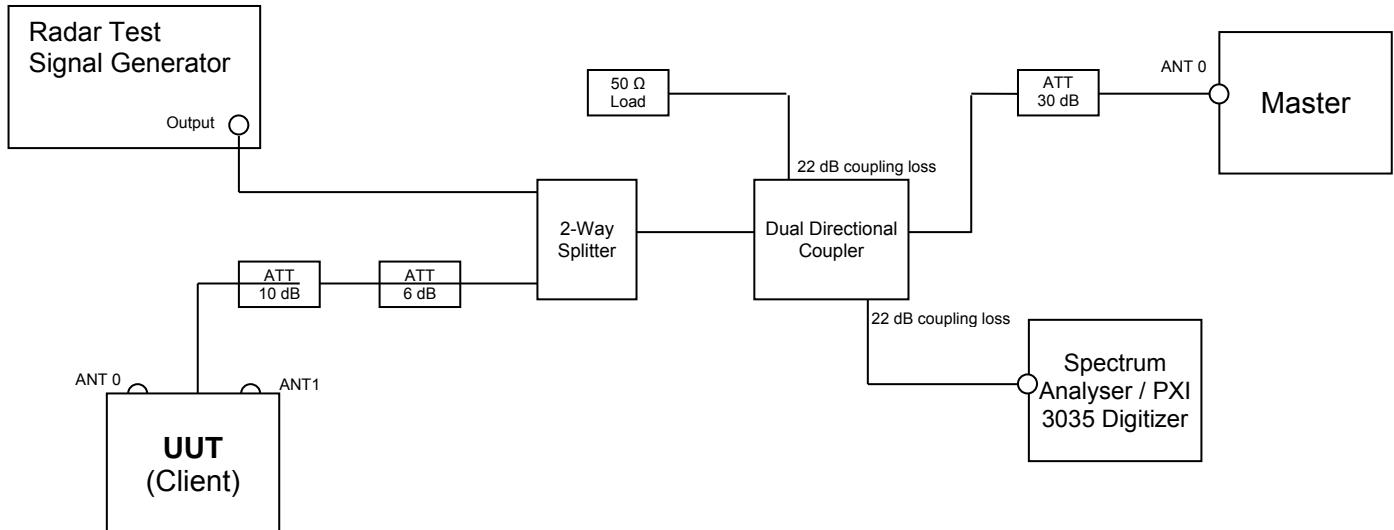




### Radar Pulse Type 0

#### Short Radar Pulse Characteristics

Radar Type	Pulse Width (μs)	PRI (μs)	Number of Pulses
0	1	1428	18

#### Client without Radar Detection


#### Radar Type 0 Plot

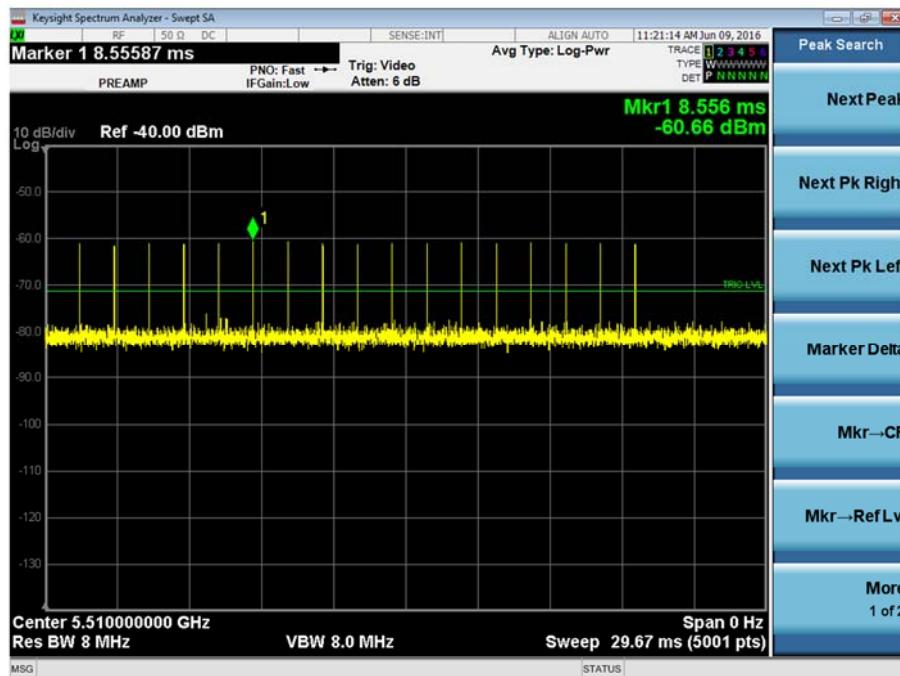



Product Service

### Channel Loading Plot

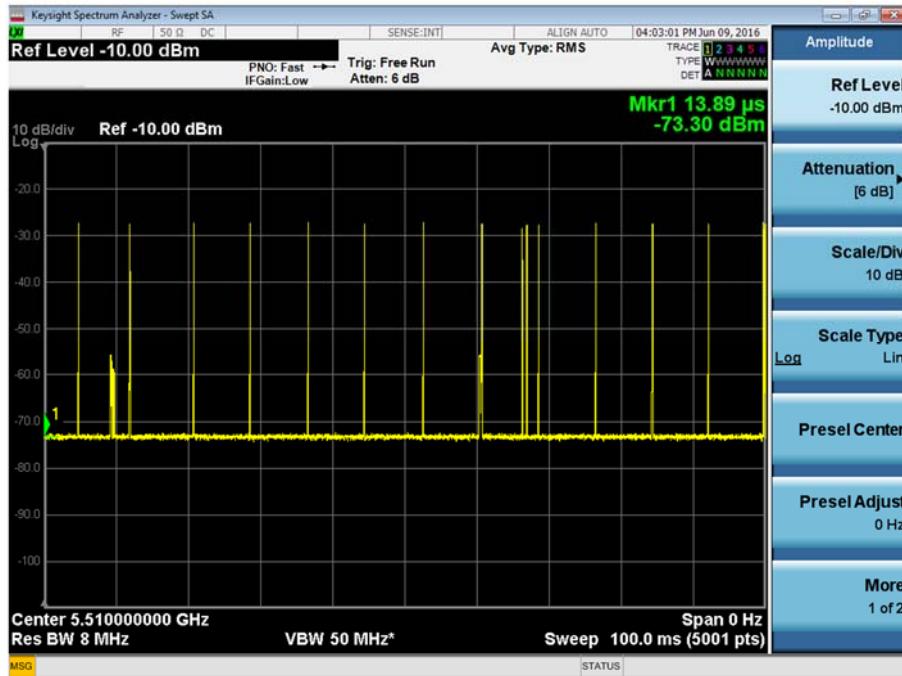

FCC KDB 905462 D02 New Rules v02 specifies that the system is to be loaded using means that is typical for the device. In this case this was audio streaming using the FCC designated test file 5\_GHz\_Audio\_Test\_file.WAV. However, due to the bandwidth available and the low demand of an audio stream, the channel loading of 17% could not be achieved. Lower data rates were used to increase the channel loading as much as possible.



## 2.2 IN-SERVICE MONITORING

### 2.2.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (h)(2)(iii)(iv)  
Industry Canada RSS-247, Clause 6.3

### 2.2.2 Equipment Under Test and Modification State

Minuet/FS5332 S/N: RAD108618 (Module) & RAD108363 (Platform) - Modification State 0

### 2.2.3 Date of Test

9 June 2016

### 2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.2.5 Test Procedure

The test was performed in accordance with KDB 905462 D02 New Rules v02, clause 7.8.3.

#### Client without Radar Detection

The EUT was associated with the FCC Approved Master device FCC ID: UZ7MB82 and FCC ID: Q9DAPIN0224225. A computer was connected via an Ethernet cable to the Master device and the FCC defined audio file was streamed to the Client device.

Radar Pulse Type 0 was then transmitted and the Spectrum monitored. The transmissions from the UUT were observed for a period of 12 seconds after the final injected Radar Pulse. The Channel Move Time and the Channel Closing Time were measured and recorded.

Initially, the UUT was removed from the test setup and replaced with a Spectrum Analyser. A Type 0 Radar burst was sent from the signal generator and its level adjusted until the required level of -62 dBm was achieved. The Spectrum Analyser was then replaced with the master device.

The UUT was configured to stream the FCC designated Audio file. Using the Aeroflex DFS Software, the Radar burst was injected to the Master. The test software triggered the capture mechanism of the PXI Digitiser and data was collected of the Radar burst, the Master and Client devices. The data was analysed with the Channel Move time being measured at the final point where transmissions ceased. It was checked that all transmissions stopped within the 10 second period defined from the point of the end of the final Radar pulse + 10 seconds. In addition, the aggregate on time during the first 200ms and the following 9.8 seconds of the Channel Move Time was computed by the Aeroflex DFS Software.

The markers on the trace data correspond to the following time periods:

Red - End Of Radar Burst, (T0)

Purple - End Of 200ms Period, (T0 + 200 ms)



Product Service

Orange - End Of Channel Move Time, (T0 + 10 seconds)

Additionally, the PXI digitiser was replaced with a Spectrum Analyser. The external trigger from the Aeroflex DFS test system was used to trigger a 30 minute sweep from the moment the radar burst sequence was injected. It was verified that no transmissions occurred on the test channel during this time period.

#### 2.2.6 Environmental Conditions

Ambient Temperature 21.7°C  
Relative Humidity 32.7%




## 2.2.7 Test Results

### 802.11a, In-Service Monitoring Results

Channel Move Time	4.69 seconds
Channel Closing Time (Aggregate Time During 200ms)	0.23 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	0.96 ms
Channel Closing Time (Aggregate Time During 10s)	1.19 ms


Overall Power vs Time Display, showing channel closing and move time

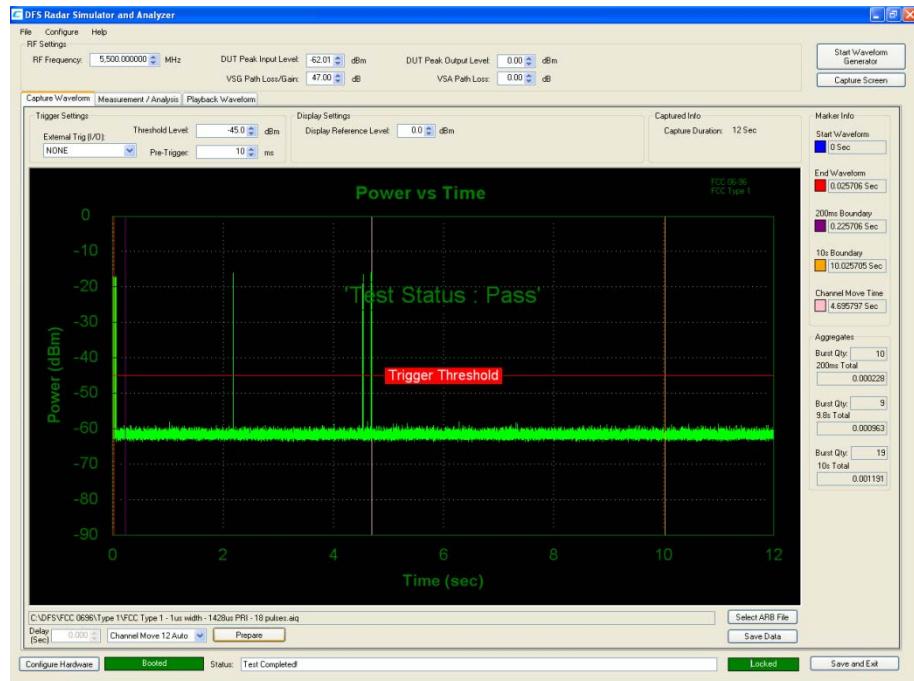




Product Service

### Zoom of Radar Burst, Access Point and Client Signalling

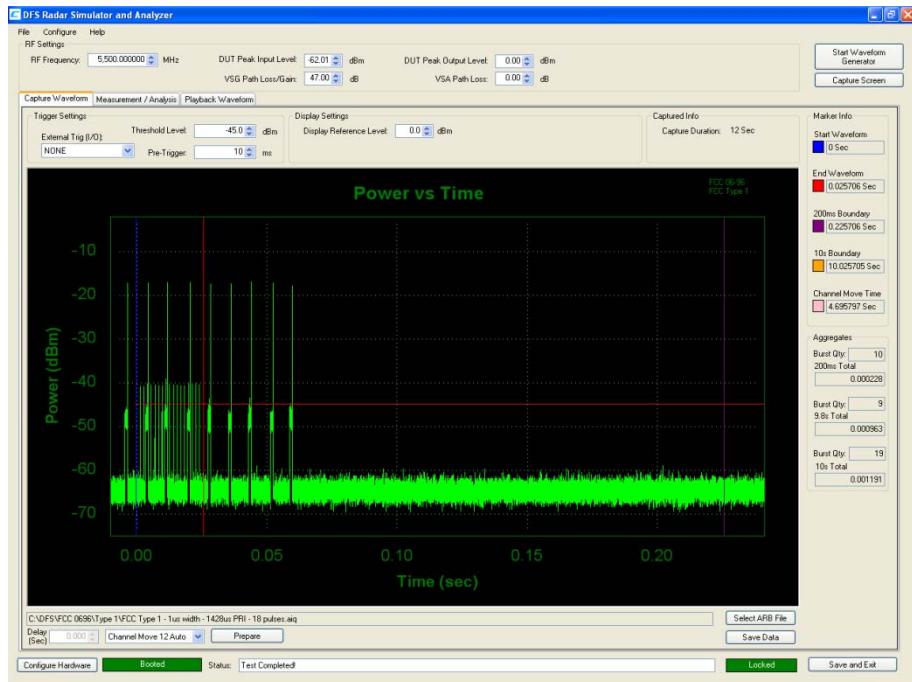

### Non-occupancy Period

The EUT did not resume transmissions during the non-occupancy period.

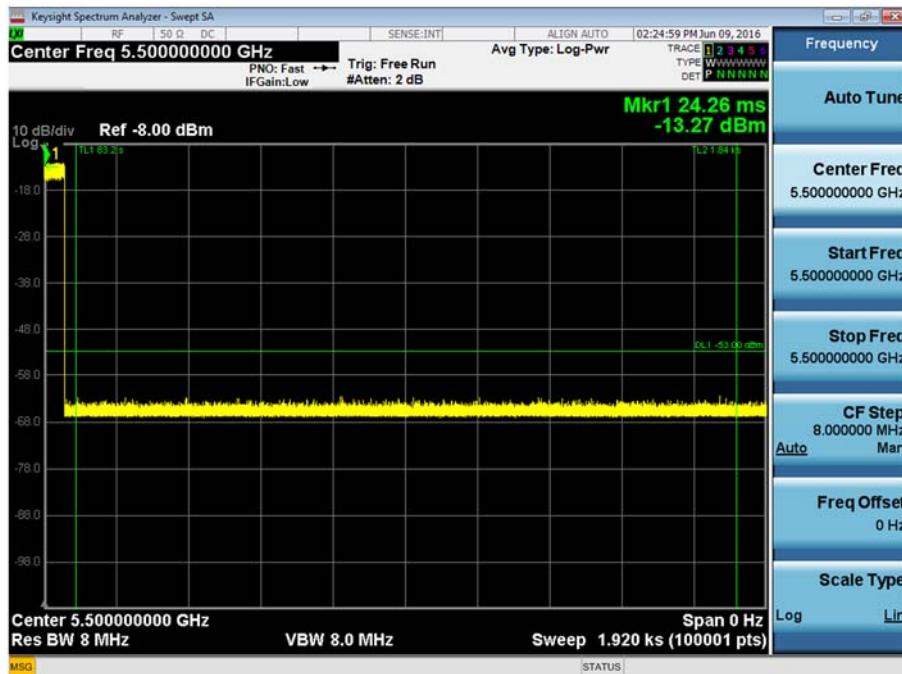



Product Service

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

Industry Canada RSS-247, Limit Clause 6.3 (2)(iii)(iv)(v)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms
Non-occupancy Period	> 30 minutes




Product Service

### 802.11ac 80 MHz Bandwidth, In-Service Monitoring Results

Channel Move Time	5.90 seconds
Channel Closing Time (Aggregate Time During 200ms)	0.84 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	12.22 ms
Channel Closing Time (Aggregate Time During 10s)	13.06 ms


### Overall Power vs Time Display, showing channel closing and move time

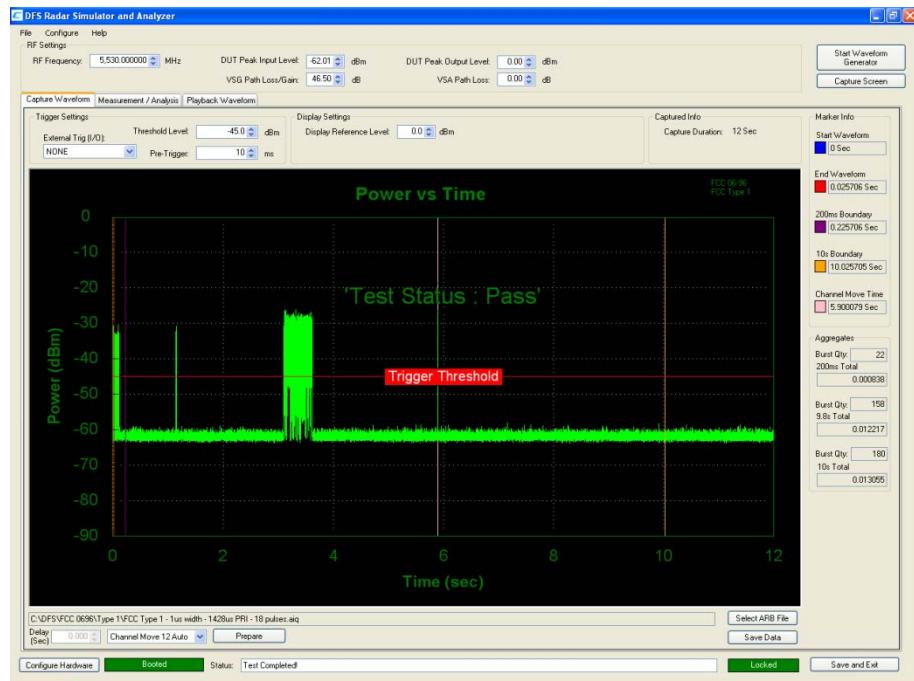




Product Service

### Zoom of Radar Burst, Access Point and Client Signalling

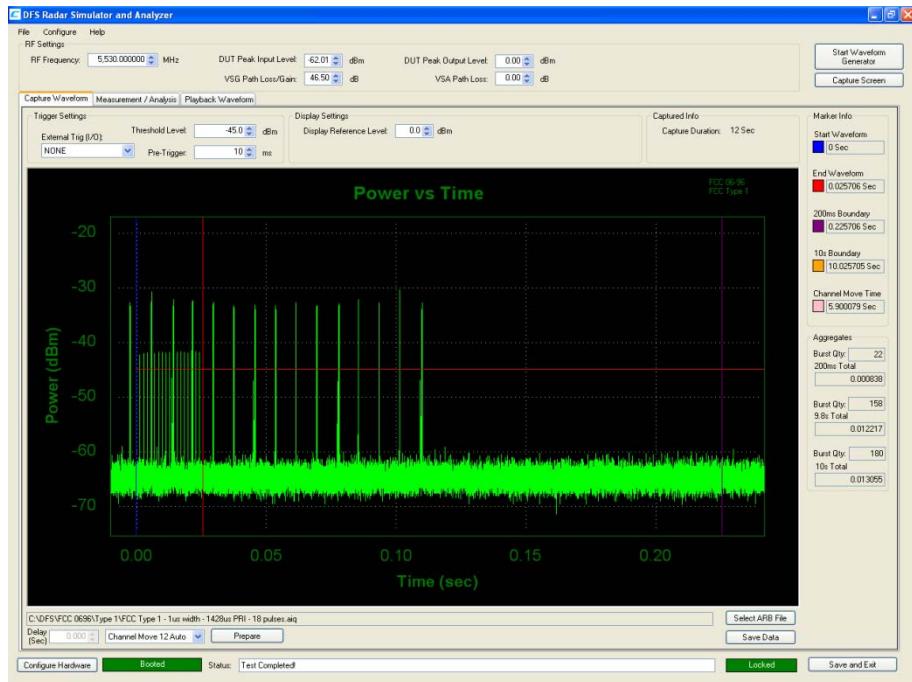

### Non-occupancy Period

The EUT did not resume transmissions during the non-occupancy period.

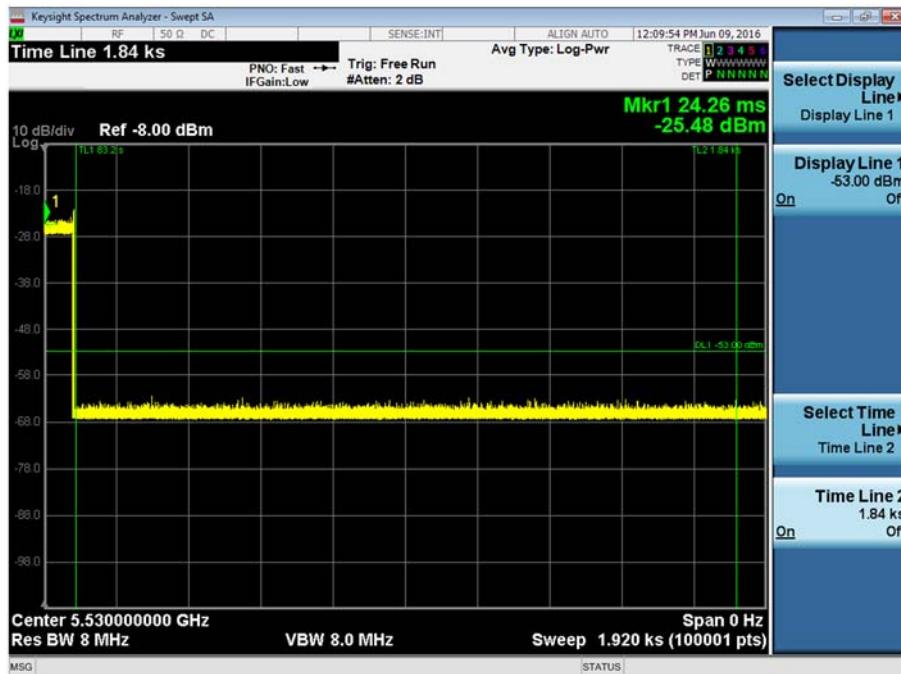



Product Service

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

Industry Canada RSS-247, Limit Clause 6.3 (2)(iii)(iv)(v)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms
Non-occupancy Period	> 30 minutes




Product Service

### 802.11n 40 MHz Bandwidth, In-Service Monitoring Results


Channel Move Time	0.026 seconds
Channel Closing Time (Aggregate Time During 200ms)	0 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	0 ms
Channel Closing Time (Aggregate Time During 10s)	0 ms

### Overall Power vs Time Display, showing channel closing and move time

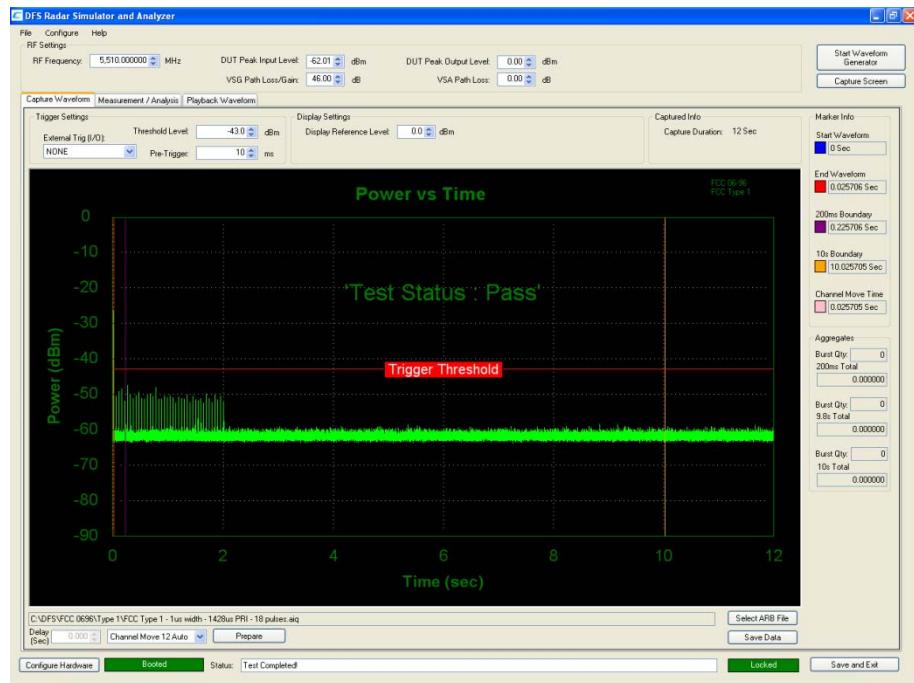




### Zoom of Radar Burst, Access Point and Client Signalling

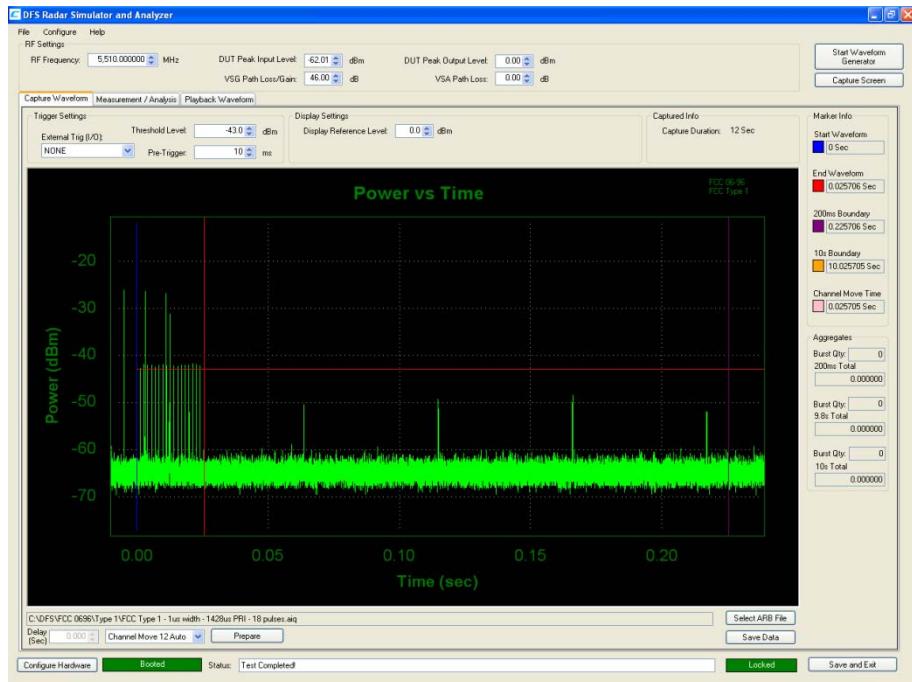

### Non-occupancy Period

The EUT did not resume transmissions during the non-occupancy period.

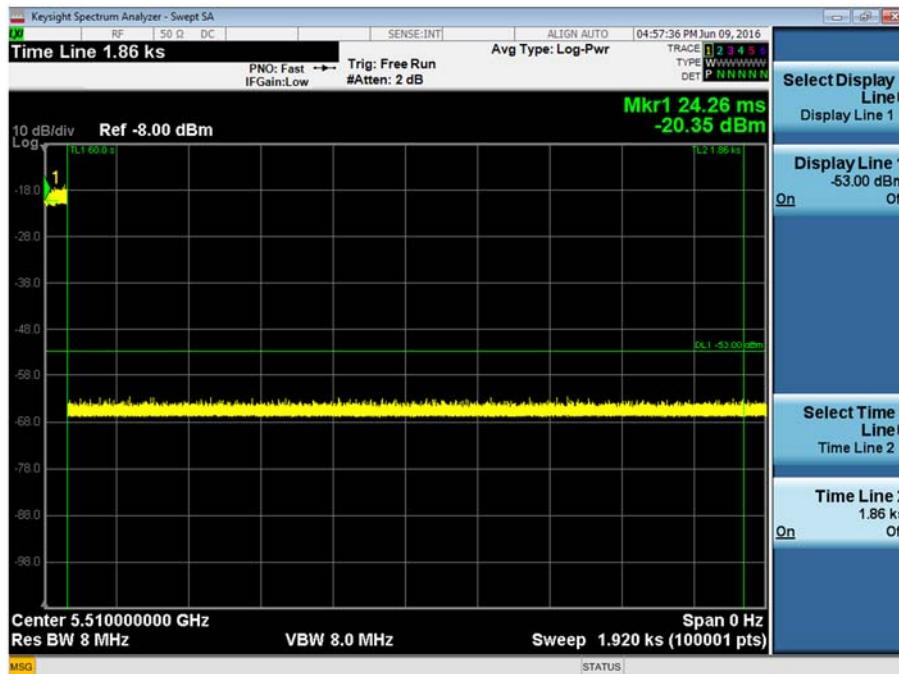



Product Service

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

Industry Canada RSS-247, Limit Clause 6.3 (2)(iii)(iv)(v)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms
Non-occupancy Period	> 30 minutes



Product Service

## **SECTION 3**

### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 - In-Service Monitoring</b>					
Directional Coupler	Hewlett Packard	11692D	451	12	13-Oct-2016
Hygrometer	Rotronic	I-1000	3220	12	19-Aug-2016
PXI RF Digitizer	Aeroflex	3035	4012	24	29-Jan-2018
PXI RF Synthesizer	Aeroflex	3010	4013	24	29-Jan-2018
PXI RF Synthesizer	Aeroflex	3011	4014	24	29-Jan-2018
PXI Digital RF Signal Generator	Aeroflex	3025	4015	24	29-Jan-2018
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
PXA Signal Analyser	Agilent Technologies	N9030A PXA	4409	12	8-Mar-2017
Access Point	NETGEAR	DGN1000	4452	-	TU
AccessPoint	ARUBA	APIN0224	4448	-	TU

O/P MON – Output Monitored with Calibrated Equipment



Product Service

### 3.2 SUPPORT TEST EQUIPMENT

Instrument	Manufacturer	Type No.	Serial Number
Computer	Dell Inc.	E6510	10388944297



Product Service

### 3.3 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
In-Service Monitoring	Time: $\pm 0.47\%$ Power: $\pm 1.29\text{ dB}$



Product Service

## **SECTION 4**

### **PHOTOGRAPHS**




Product Service

#### 4.1 TEST SET-UP PHOTOGRAPHS

See test set-up photographs exhibit "75934517 FCC and IC Set Up Photos.pdf".

#### 4.2 DFS TEST EQUIPMENT

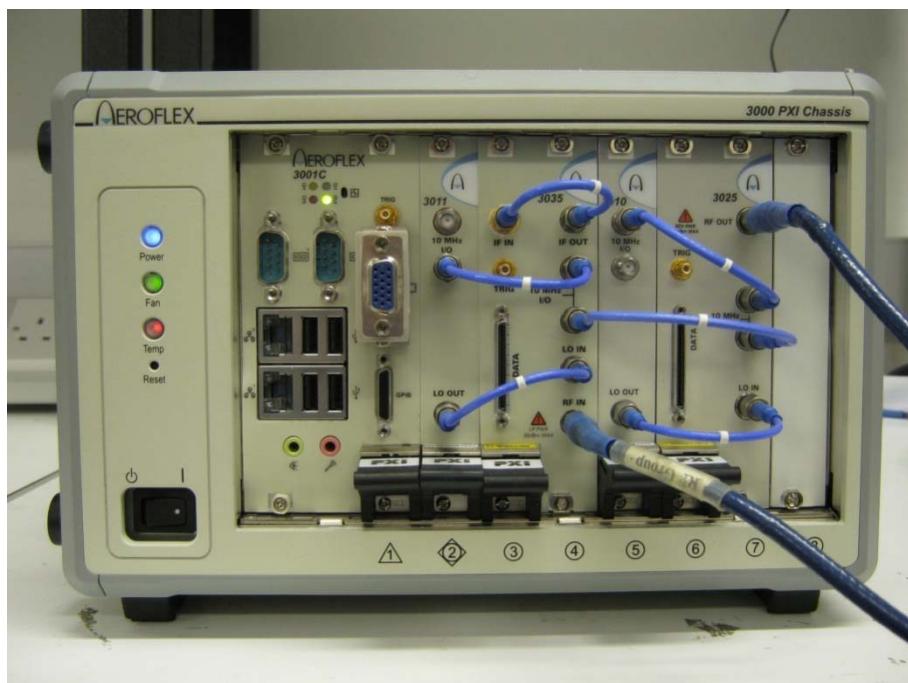

Test Set Up



Product Service

## **SECTION 5**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

## 5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of  
TÜV SÜD Product Service

© 2016 TÜV SÜD Product Service