



Product Service

**Choose certainty.
Add value.**

Report On

FCC and Industry Canada Testing of the
Frontier Silicon Ltd Venice 6.5

In accordance with FCC CFR 47 Part 15E, Industry Canada RSS-210
and Industry Canada RSS-GEN

COMMERCIAL-IN-CONFIDENCE

FCC ID: YYX-HA-FS2026-F5

IC ID: UNKNOWN

Document 75917143 Report 06 Issue 1

June 2012



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuvps.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC and Industry Canada Testing of the
Frontier Silicon Ltd Venice 6.5
In accordance with FCC CFR 47 Part 15E, Industry Canada RSS-210
and Industry Canada RSS-GEN

Document 75917143 Report 06 Issue 1

June 2012

PREPARED FOR

Frontier Silicon Ltd
Dales Manor Business Park
Babraham Road
Sawston
Cambridge
CB22 3LJ
United Kingdom

PREPARED BY

Natalie Bennett
Senior Administrator (Technical)

APPROVED BY

Mark Jenkins
Authorised Signatory

DATED

22 June 2012

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15E, Industry Canada RSS-210 and Industry Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

G Lawler

B Airs





CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Application Form 8
1.4	Product Information 11
1.5	Test Conditions 11
1.6	Deviations from the Standard 11
1.7	Modification Record 11
2	TEST DETAILS 12
2.1	AC Line Conducted Emissions 13
2.2	Power Limits 16
2.3	Undesirable Emission Limits 92
2.4	Frequency Stability 236
2.5	26 dB Bandwidth 243
2.6	99 % Emission Bandwidth 271
2.7	Peak Power Spectral Density 299
2.8	Ratio of the Peak Excursion of the Modulation Envelope 327
3	TEST EQUIPMENT USED 333
3.1	Test Equipment Used 334
3.2	Measurement Uncertainty 338
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 339
4.1	Accreditation, Disclaimers and Copyright 340



Product Service

SECTION 1

REPORT SUMMARY

FCC and Industry Canada Testing of the
Frontier Silicon Ltd Venice 6.5
In accordance with FCC CFR 47 Part 15E, Industry Canada RSS-210 and Industry Canada
RSS-GEN



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC and Industry Canada Testing of the Frontier Silicon Ltd Venice 6.5 to the requirements of FCC CFR 47 Part 15E, Industry Canada RSS-210 and Industry Canada RSS-GEN.

Objective	To perform FCC and Industry Canada Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Frontier Silicon Ltd
Model Number(s)	Venice 6.5
Serial Number(s)	1) Conducted PIFA Sample, S/N: RAD103037 on Test Jig S/N: RAD103234 2) External Antenna Radiated Sample, S/N: RAD103021 on Test Jig S/N: RAD1030235 3) Radiated PIFA Sample, S/N: RAD103045 on Test Jig, S/N: RAD1030235
Number of Samples Tested	3
Test Specification/Issue/Date	FCC CFR 47 Part 15E (2011) Industry Canada RSS-210 (2010) Industry Canada RSS-GEN (2010)
Incoming Release Date	Application Form 07 June 2012
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	FS021247 17 February 2012
Start of Test	7 March 2012
Finish of Test	30 April 2012
Name of Engineer(s)	G Lawler B Airs
Related Document(s)	FCC 06-96: 2006; FCC Public Notice DA 02-2138: 2002; UKAS M3003: Edition 2: 2007; ETSI TR 100 028: 2001



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15E, Industry Canada RSS-210 and Industry Canada RSS-GEN is shown below.

Section	Spec Clause			Test Description	Result	Comments/Base Standard
	FCC	RSS-210	RSS-GEN			
802.11(a) – Onboard PIFA Antenna						
2.1	15.207	-	7.2.4	AC Line Conducted Emissions	Pass	
2.2	15.407 (a)(1)(2)(3)	A9.2 (1)(2)(3)(4)	-	Power Limits	Pass	
2.3	15.407 (b)(1)(2)(3)(4)(6)(7)	A9.2 (1)(2)(3)(4)	-	Undesirable Emission Limits	Pass	
2.4	2.1055 and 15.407 (g)	-	-	Frequency Stability	Pass	
2.5	15.407 (a)	-	-	26 dB Bandwidth	Pass	
2.6	-	A9.2	-	99 % Emission Bandwidth	Pass	
2.7	15.407 (a)(5)	A9.2	-	Peak Power Spectral Density	Pass	
2.8	15.407 (a)(6)	-	-	Ratio of the Peak Excursion of the Modulation Envelope	Pass	



Product Service

Section	Spec Clause			Test Description	Result	Comments/Base Standard
	FCC	RSS-210	RSS-GEN			
802.11(n) - 5 GHz 40 MHz BW – Onboard PIFA Antenna						
2.2	15.407 (a)(1)(2)(3)	A9.2 (1)(2)(3)(4)	-	Power Limits	Pass	
2.3	15.407 (b)(1)(2)(3)(4)(6)(7) and	A9.2 (1)(2)(3)(4)	-	Undesirable Emission Limits	Pass	
2.4	2.1055 and 15.407 (g)	-	-	Frequency Stability	Pass	
2.5	15.407 (a)	-	-	26 dB Bandwidth	Pass	
2.6	-	A9.2	-	99 % Emission Bandwidth	Pass	
2.7	15.407 (a)(5)	A9.2	-	Peak Power Spectral Density	Pass	
2.8	15.407 (a)(6)	-	-	Ratio of the Peak Excursion of the Modulation Envelope	Pass	
802.11(n) - 5 GHz, 20 MHz BW – Onboard PIFA Antenna						
2.2	15.407 (a)(1)(2)(3)	A9.2 (1)(2)(3)(4)	-	Power Limits	Pass	
2.3	15.407 (b)(1)(2)(3)(4)(6)(7)	A9.2 (1)(2)(3)(4)	-	Undesirable Emission Limits	Pass	
2.4	2.1055 and 15.407 (g)	-	-	Frequency Stability	Pass	
2.5	15.407 (a)	-	-	26 dB Bandwidth	Pass	
2.6	-	A9.2	-	99 % Emission Bandwidth	Pass	
2.7	15.407 (a)(5)	A9.2	-	Peak Power Spectral Density	Pass	
2.8	15.407 (a)(6)	-	-	Ratio of the Peak Excursion of the Modulation Envelope	Pass	



Product Service

Section	Spec Clause			Test Description	Result	Comments/Base Standard
	FCC	RSS-210	RSS-GEN			
802.11(n) - 5 GHz – Onboard PIFA Antenna						
2.3	15.407 (a)(1)(2)(3)	A9.2 (1)(2)(3)(4)	-	Undesirable Emission Limits	Pass	
802.11(a) – External Antenna						
2.2	15.407 (a)(1)(2)(3)	A9.2 (1)(2)(3)(4)	-	Power Limits	Pass	
802.11(n) - 5 GHz – External Antenna						
2.2	15.407 (a)(1)(2)(3)	A9.2 (1)(2)(3)(4)	-	Power Limits	Pass	
802.11(n) - 5 GHz – External Antenna						
2.2	15.407 (a)(1)(2)(3)	A9.2 (1)(2)(3)(4)	-	Power Limits	Pass	



Product Service

1.3 APPLICATION FORM

EQUIPMENT DESCRIPTION	
Model Name/Number	Venice 6.5
Part Number	HA-FS2026-F5xxxx ('FCC variant , 'x' depends on customer variant e.g.HA-FS2026-F50008) and HA-FS2026-05xxxx ('ETSI variant , 'x' depends on customer variant e.g.HA-FS2026-050008)
FCC ID (if applicable)	YYX-HA-FS2026-F5
Industry Canada ID (if applicable)	
Technical Description (Please provide a brief description of the intended use of the equipment)	The Venice 6.5 is a radio module supporting Internet Radio (WiFi or Ethernet), Networked Audio Streaming (WiFi or Ethernet), iPod/iPhone/iPad control and DAB/DAB+/FM-RDS reception when installed in a consumer audio product.

INFORMATION REQUIRED	
Modes:	
☒ 802.11(a) ☒ 802.11(n)	
a) The occupied channel bandwidth(s): ☒ Channel Bandwidth 1: 20MHz ☒ Channel Bandwidth 2: 40MHz NOTE: Add more lines if the equipment has more channel Bandwidths.	
b) The DFS related operating mode(s) of the equipment: ☐ Master ☐ Slave with radar detection ☒ Slave without radar detection NOTE: If the equipment has more than 1 operating mode, tick all that apply.	
c) The equipment can operate in ad-hoc mode: ☒ no ad-hoc operation ☐ ad-hoc operation in the frequency range 5150MHz to 5250MHz without DFS ☐ ad-hoc operation with DFS NOTE: If more than 1 is applicable, tick all that apply	
d) Operating Frequency Range(s):	
☒	Range 1: 5150MHz to 5250MHz
☒	Range 2: 5250MHz to 5350MHz
☒	Range 3: 5470MHz to 5725MHz
☒	Range 4: 5725MHz to 5825MHz
NOTE: If the equipment has more than 1 Operating Frequency Range, tick all that apply.	
e) TPC feature available: ☒ Yes ☐ No	



Product Service

INFORMATION REQUIRED			
f) If the equipment has a TPC range, the lowest and highest power level (or lowest and highest EIRP level in case of integrated antenna equipment), intended antenna assemblies and corresponding operating frequency range for the TPC range (or for each of the TPC ranges if more than one is implemented).			
TPC range:			
Applicable Frequency Range:			
☐	5250MHz to 5350MHz		
☐	5470 MHz to 5725 MHz		
☒	A TPC mechanism is not required for systems with an e.i.r.p of less than 500 mW		
DFS Threshold level:		-62 dBm	
☒	at the antenna connector		☐ in front of the antenna
NOTE: For equipment with a maximum EIRP below 200 mW, the DFS threshold level shall be -62 dBm or less, for equipment with an EIRP of 200 mW or above, the DFS threshold level shall be -64 dBm or less. These levels assume a 0 dBi antenna gain. To define the applicable threshold level at the (temporary) antenna connector, the gain of the antenna (in dBi) shall be added to the threshold level. If more than one antenna is intended for this TPC range or power setting, the antenna gain of the antenna with the lowest gain shall be used.			
Power Setting 1:			
Applicable Frequency Range: 5150 MHz to 5250 MHz			
Conducted Average Power	11dBm	Average EIRP	16.5dBm
Power Setting 2:			
Applicable Frequency Range: 5250 MHz to 5350 MHz			
Conducted Average Power	11dBm	Average EIRP	16.5dBm
Power Setting 3:			
Applicable Frequency Range: 5470 MHz to 5725MHz			
Conducted Average Power	11dBm	Average EIRP	16.5dBm
Power Setting 4:			
Applicable Frequency Range: 5725 MHz to 5825MHz			
Conducted Average Power	11dBm	Average EIRP	16.5dBm
Table 3: Intended Antenna Assemblies			
Antenna Assembly name		Antenna Gain (dBi)	
PIFA		5.5	



Product Service

INFORMATION REQUIRED	
h) The extreme operating temperature range that apply to the equipment:	
Please state conditions of normal operation as specified in the users manual: 0 to 70 deg C	
Supply Voltage:	
☐	AC mains. State AC voltage
☒	DC. State DC voltage 4V, 3.3V, 1.2V +/-5%
☐	State DC current
In case of DC, indicate the type of power source:	
☐	Internal Power Supply
☐	External Power Supply or AC/DC adapter
☐	Battery Nickel Cadmium
☐	Alkaline
☐	Nickel-Metal Hydride
☐	Lithium-Ion
☐	Lead acid (Vehicle regulated)
☐	Other (please specify):

ADDITIONAL INFORMATION PROVIDED BY THE SUBMITTER			
a) Modulation:			
Continuous duty	☐	Yes	☒ No
Can the transmitter operate un-modulated?	☐	Yes	☒ No
b) Duty Cycle			
Is transmitter intended for :			
Continuous duty	☐	Yes	☒ No
Intermittent duty only	☒	Yes	☐ No
If intermittent duty state DUTY CYCLE			
Transmitter ON	Seconds	Transmitter OFF	Seconds
☒ Continuous operation possible for testing purposes			
Details: Test mode software supports continuous transmission on specific frequency and data rates			

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete

Signature:

Name: Abdul Wahed dewan

Position held: Principal RF Engineer

Date: 07/06/2012



1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Frontier Silicon Ltd Venice 6.5. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4V, 3.3V and 1.2V DC supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

Industry Canada Accreditation
IC2932B-1 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC and Industry Canada Testing of the
Frontier Silicon Ltd Venice 6.5
In accordance with FCC CFR 47 Part 15E, Industry Canada RSS-210 and Industry Canada
RSS-GEN



2.1 AC LINE CONDUCTED EMISSIONS

2.1.1 Specification Reference

FCC CFR 47 Part 15E, Clause 15.207
Industry Canada RSS-GEN, Clause 7.2.4

2.1.2 Equipment Under Test and Modification State

Venice 6.5 S/N: RAD103045 on Test Jig S/N: RAD1030235 - Modification State 0

2.1.3 Date of Test

9 April 2012

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The EUT is set up on a test table 800mm above a horizontal ground plane. A vertical ground plane is also required and is placed 400mm from the EUT. Where a EUT is floor standing it will be stood on but insulated from the ground plane by up to 12mm.

The EUT is powered through a Line Impedance Stabilisation Network (LISN) which is bonded to the ground plane. The EUT is located so that the distance between the EUT and the LISN is no less than 800mm. Where possible the cable between the mains input of the EUT and the LISN is 1m. Where this is not possible the cable is non inductively bundled with the bundle not exceeding 400mm in length.

A preliminary profile of the Conducted Emissions is obtained over the frequency range 150kHz to 30MHz. Any points of interest are noted for formal measurements.

During formal measurements, the measuring receiver is tuned to the emission of interest where Quasi – Peak and Average measurements are performed in a 9kHz Video and Resolution Bandwidth.

2.1.6 Environmental Conditions

Ambient Temperature	23.3°C
Relative Humidity	31.0%




Product Service

2.1.7 Test Results

802.11(a) – Onboard PIFA Antenna

Live Line

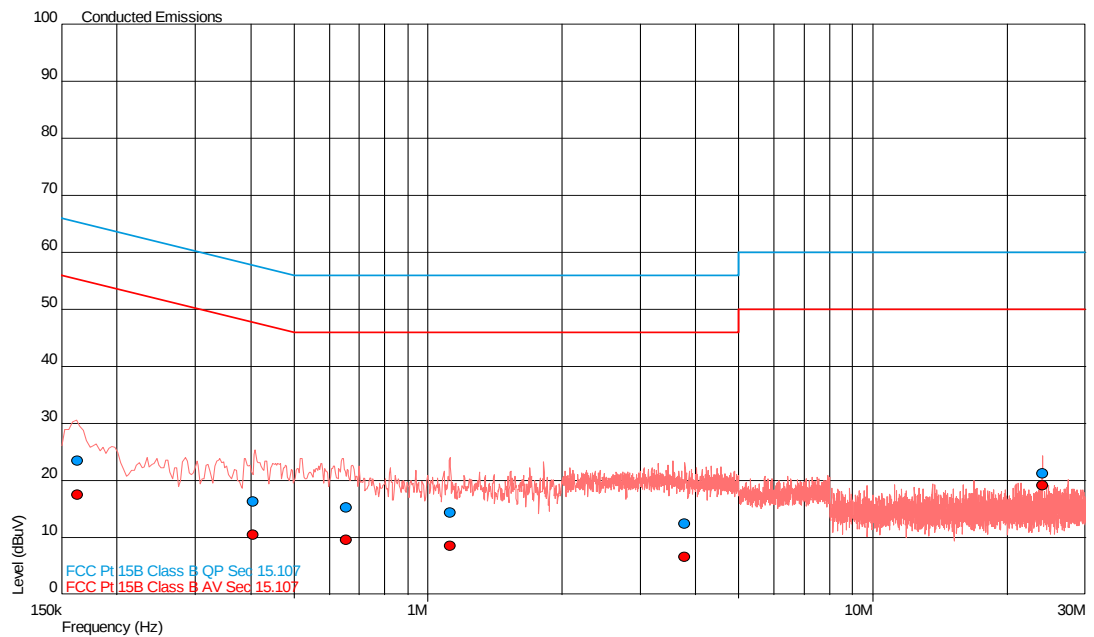


Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.163	23.5	65.3	-41.8	17.5	55.3	-37.8
0.405	16.4	57.8	-41.4	10.5	47.8	-37.3
0.654	15.3	56.0	-40.7	9.6	46.0	-36.4
1.122	14.4	56.0	-41.6	8.5	46.0	-37.5
3.766	12.4	56.0	-43.6	6.6	46.0	-39.4
24.002	21.3	60.0	-38.7	19.2	50.0	-30.8



Product Service

Neutral Line

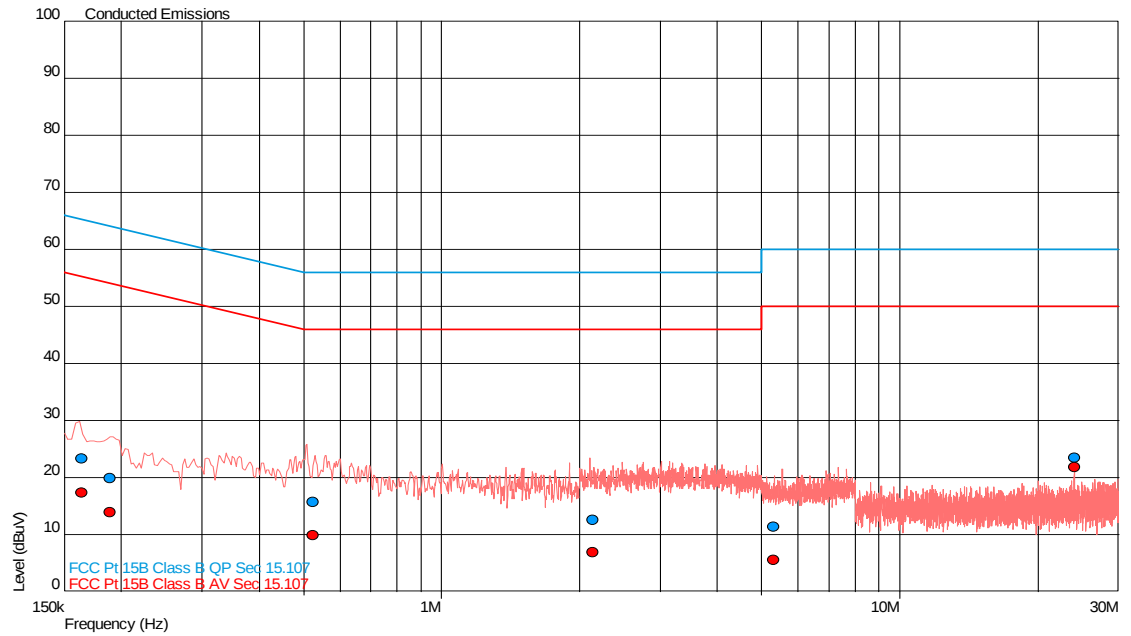

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.164	23.4	65.3	-41.8	17.4	55.3	-37.8
0.189	19.9	64.1	-44.2	13.9	54.1	-40.1
0.524	15.8	56.0	-40.2	10.0	46.0	-36.0
2.139	12.6	56.0	-43.4	6.9	46.0	-39.1
5.298	11.4	60.0	-48.6	5.6	50.0	-44.4
24.003	23.5	60.0	-36.5	21.9	50.0	-28.1



2.2 POWER LIMITS

2.2.1 Specification Reference

FCC CFR 47 Part 15E, Clause 15.407 (a)(1)(2)(3)
Industry Canada RSS-210, Clause A9.2 (1)(2)(3)(4)

2.2.2 Equipment Under Test and Modification State

Venice 6.5 S/N: RAD103045 on Test Jig S/N: RAD1030235 - Modification State 0
Venice 6.5 S/N: RAD103037 on Test Jig S/N: RAD103234 - Modification State 0
Venice 6.5 S/N: RAD103021 on Test Jig S/N: RAD1030235 - Modification State 0

2.2.3 Date of Test

18 March 2012, 31 March 2012, 9 April 2012, 10 April 2012, 20 April 2012 & 23 April 2012

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

For conducted power, the EUT was transmitted at maximum power via a cable and attenuator to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a resolution bandwidth and video bandwidth of 1 MHz were used to perform the measurement.

For radiated power, the EUT was transmitted at maximum power level. The signal was observed on the Spectrum Analyser using a Double Ridge Guide antenna at 3 metres from the EUT. The signal was maximised by rotating the EUT 360° and a height search of the measuring antenna. A substitution was then performed using a substitution antenna and signal generator.

This level was maximised by adjusting the height of the measuring antenna once more. The level from the signal generator was then adjusted to achieve the same raw result as with the EUT. This level was then corrected to account for cable loss and antenna factor. A calculation was then performed to obtain the final figure.

In both cases a Peak Power Analyser was then used to obtain a correction factor for the wideband signal and in terms of an rms-equivalent voltage.

2.2.6 Environmental Conditions

Ambient Temperature	17.9 - 24.3°C
Relative Humidity	28.0 - 34.0%



Product Service

2.2.7 Test Results


802.11(a) – Onboard PIFA Antenna

Radiated

Frequency Band 1

5180 MHz

EIRP (dBm)	EIRP (mW)
16.83	48.19

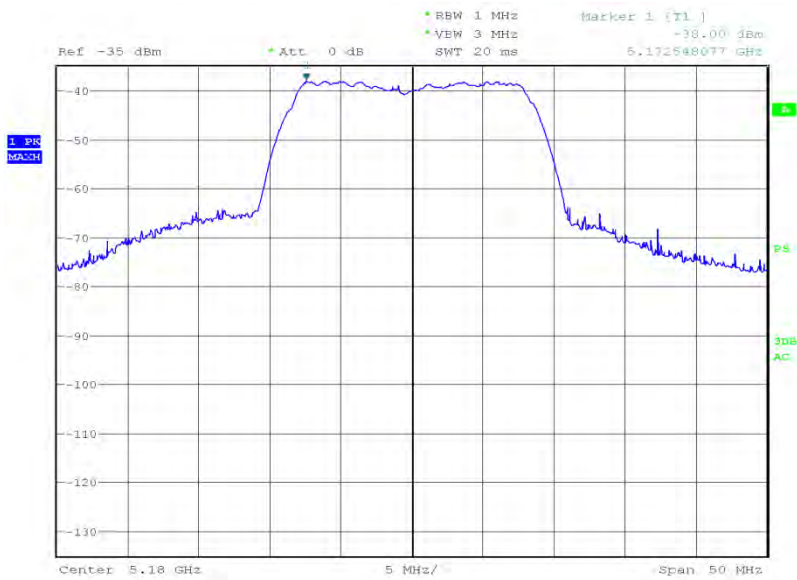


Date: 7.MAR.2012 16:01:01



Product Service

5220 MHz

EIRP (dBm)	EIRP (mW)
17.72	59.16

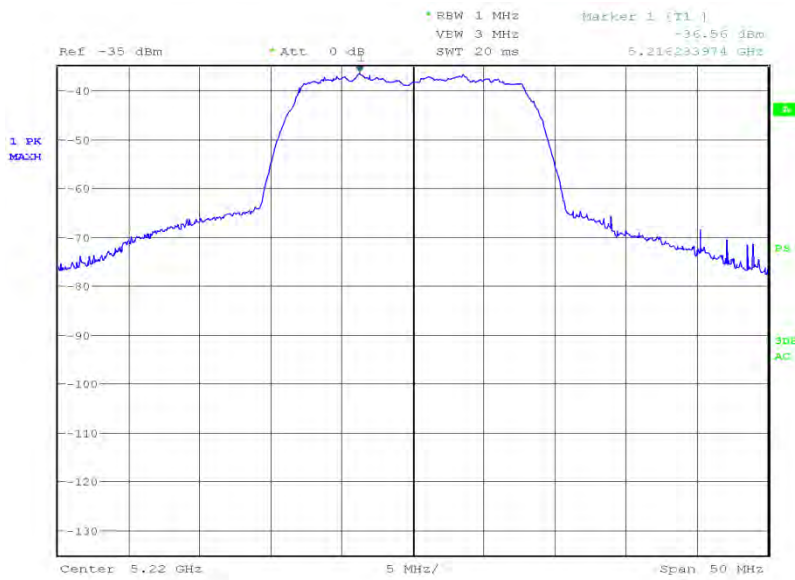


Date: 10.MAR.2012 08:20:31



Product Service

5240 MHz

EIRP (dBm)	EIRP (mW)
16.93	49.32

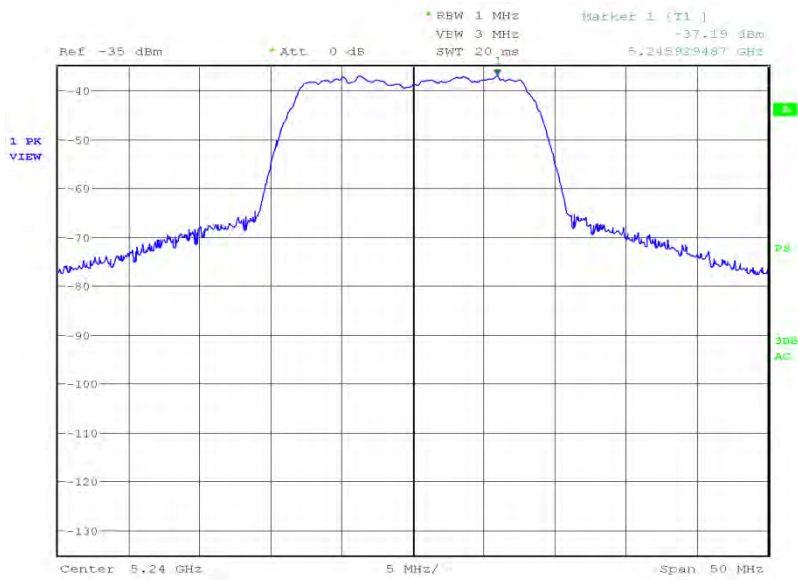

Date: 10.MAR.2012 08:37:42




Product Service

Radiated

Frequency Band 2

5260 MHz

EIRP (dBm)	EIRP (mW)
15.78	37.84

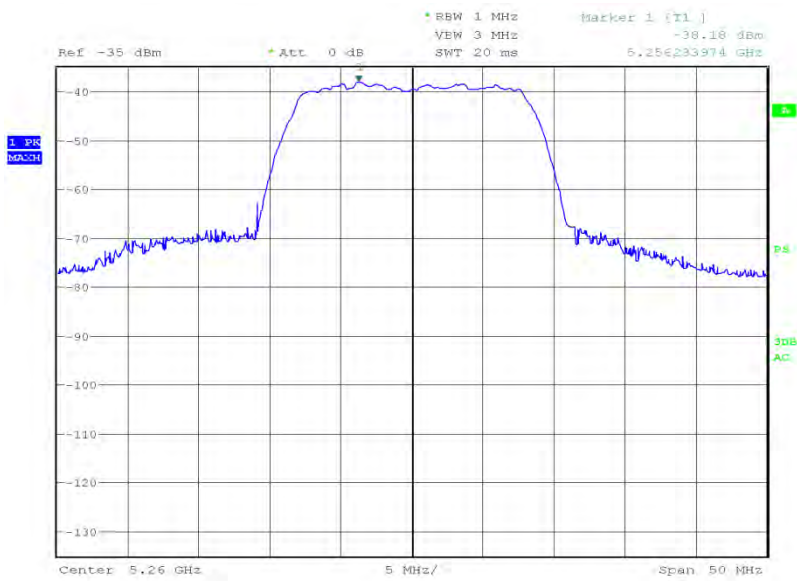


Date: 10.MAR.2012 08:47:13



Product Service

5300 MHz

EIRP (dBm)	EIRP (mW)
15.56	35.97

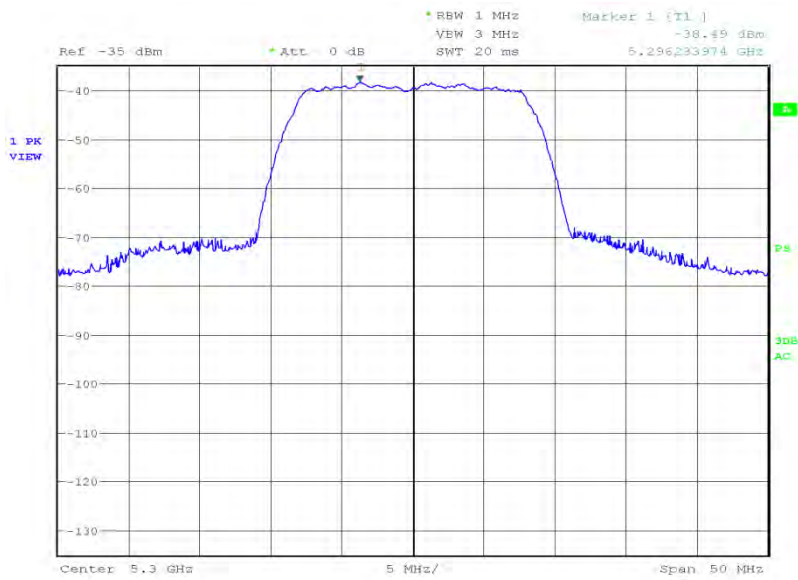


Date: 10.MAR.2012 08:54:10



Product Service

5320 MHz

EIRP (dBm)	EIRP (mW)
+15.74	37.50

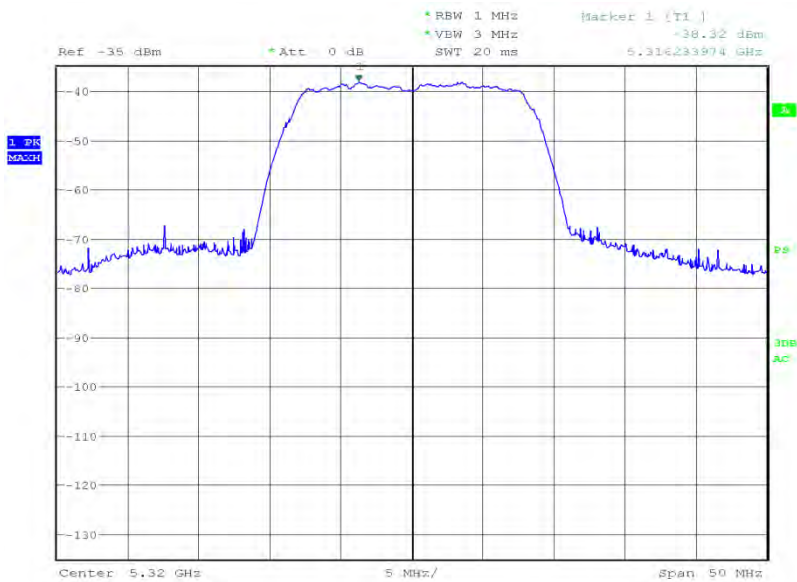

Date: 7.MAR.2012 18:11:37




Product Service

Radiated

Frequency Band 3

5500 MHz

EIRP (dBm)	EIRP (mW)
15.11	32.43

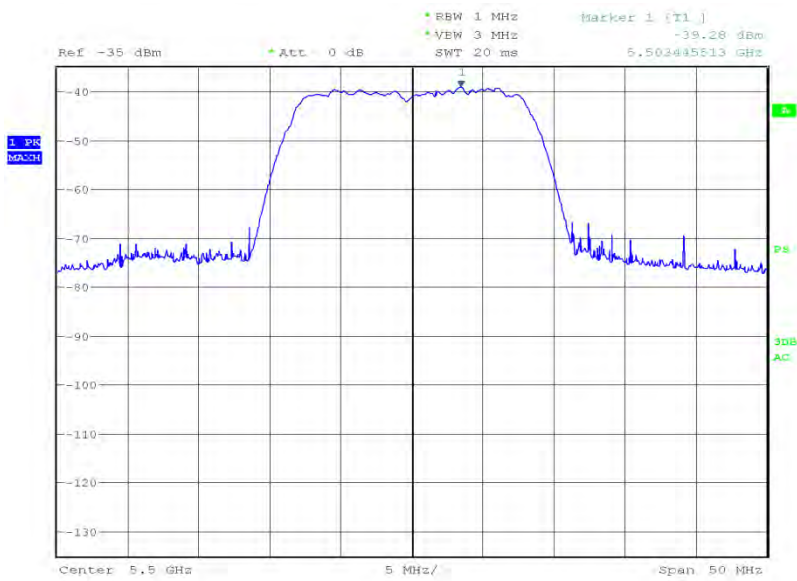


Date: 7.MAR.2012 18:49:55



Product Service

5600 MHz

EIRP (dBm)	EIRP (mW)
14.74	29.79

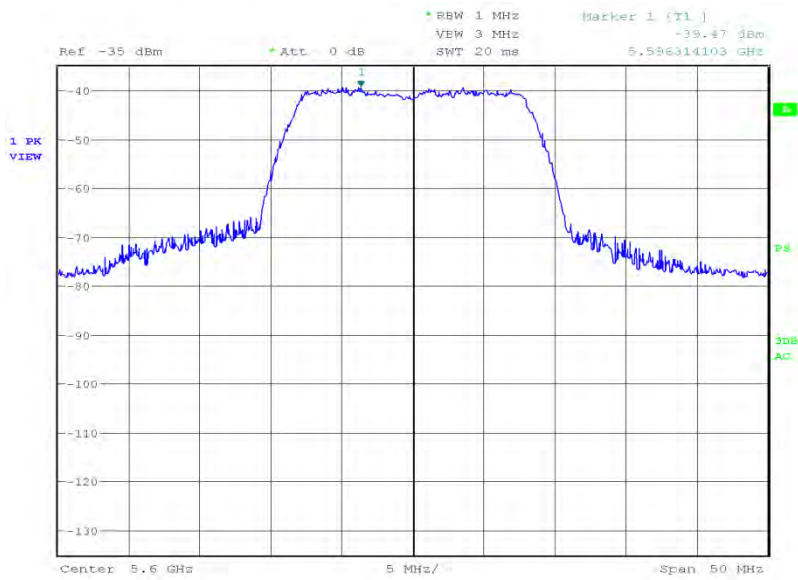


Date: 10.MAR.2012 09:30:27



Product Service

5700 MHz

EIRP (dBm)	EIRP (mW)
15.52	35.65

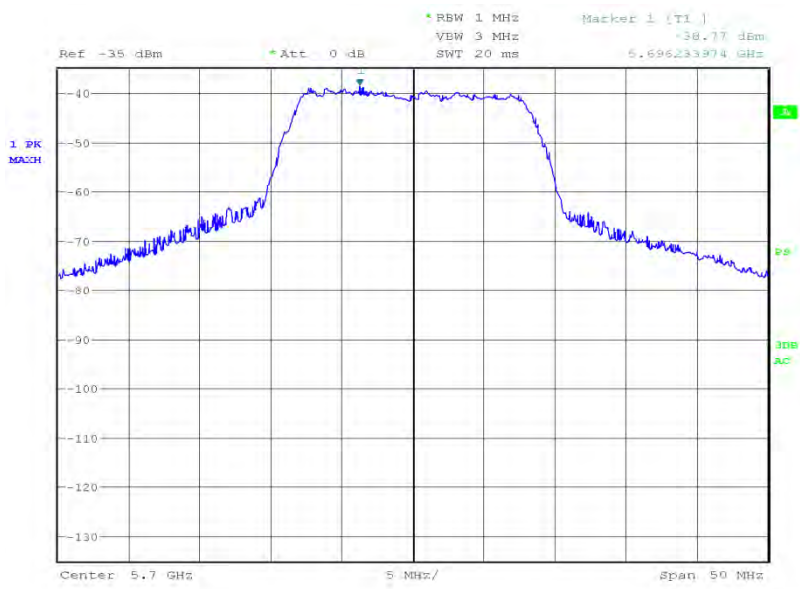


Date: 10.MAR.2012 09:35:20



Product Service

Radiated
Frequency Band 4
5745 MHz

EIRP (dBm)	EIRP (mW)
14.87	30.69

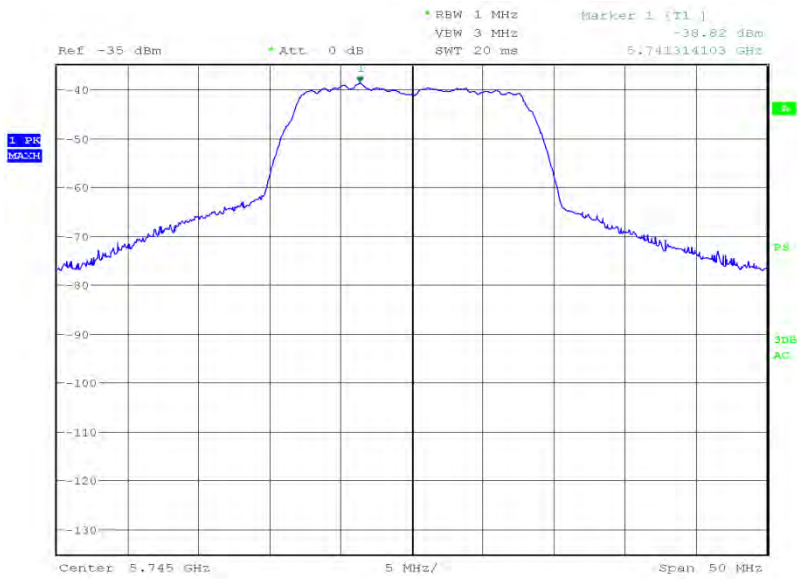


Date: 10,MAR,2012 10:01:41



Product Service

5785 MHz

EIRP (dBm)	EIRP (mW)
13.89	24.49

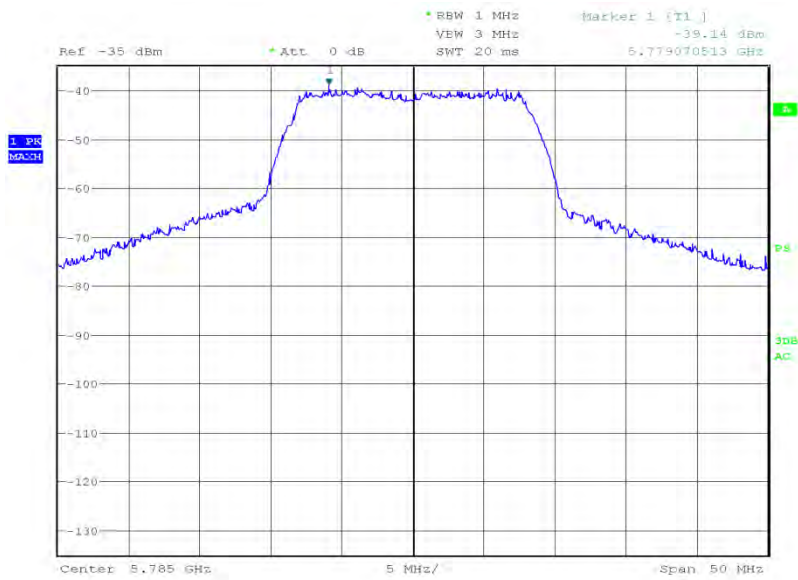


Date: 10.MAR.2012 10:20:15



Product Service

5805 MHz

EIRP (dBm)	EIRP (mW)
13.10	20.42

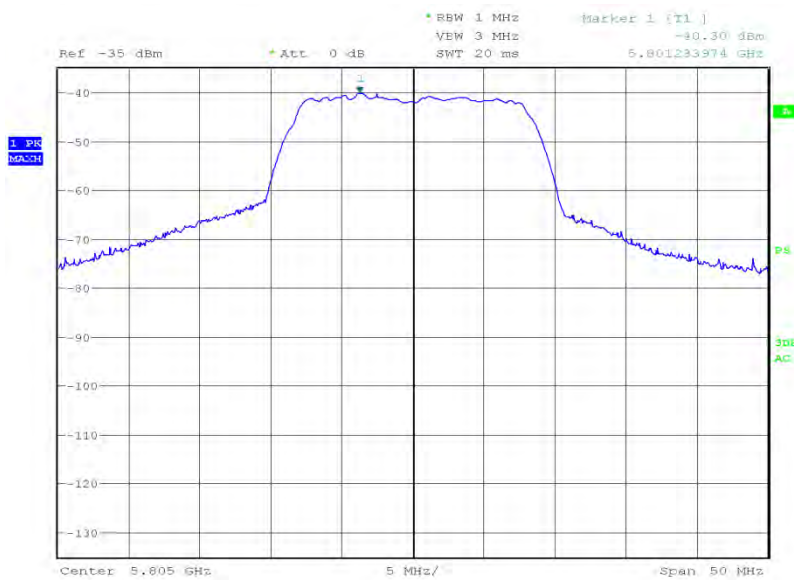

Date: 10.MAR.2012 10:48:03

Limit for Radiated

Frequency Band (MHz)	FCC Limit	IC Limit
5150 to 5250	Lesser of 200 mW or 10 dBm + 10 log B	Lesser of 200 mW or 10 dBm + 10 log B
5250 to 5350	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5470 to 5725	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5725 to 5825	Lesser of 4 W or 23 dBm + 10 log B	Lesser of 4 W or 23 dBm + 10 log B

Note: For FCC limit, “B” = 26 dB Bandwidth. For IC limit “B” = 99% Occupied Bandwidth.
For FCC only – It is acceptable to have an antenna with up to 6 dBi gain, without reducing the conducted output power.



Product Service

ConductedFrequency Band 15180 MHz

EIRP (dBm)	EIRP (mW)
10.48	11.169

5220 MHz

EIRP (dBm)	EIRP (mW)
10.87	10.218

5240 MHz

EIRP (dBm)	EIRP (mW)
11.03	12.677

The test was performed on the worst case data rate for 802.11(a) modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 54Mbps.

ConductedFrequency Band 25260 MHz

EIRP (dBm)	EIRP (mW)
10.15	10.351

5300 MHz

EIRP (dBm)	EIRP (mW)
9.34	8.590

5320 MHz

EIRP (dBm)	EIRP (mW)
9.78	9.506

The test was performed on the worst case data rate for 802.11(a) modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 54Mbps.



Product Service

ConductedFrequency Band 35500 MHz

EIRP (dBm)	EIRP (mW)
9.23	8.375

5600 MHz

EIRP (dBm)	EIRP (mW)
9.15	8.222

5700 MHz

EIRP (dBm)	EIRP (mW)
9.95	9.886

The test was performed on the worst case data rate for 802.11(a) modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 54Mbps.

ConductedFrequency Band 45745 MHz

EIRP (dBm)	EIRP (mW)
10.11	10.257

5785 MHz

EIRP (dBm)	EIRP (mW)
9.82	9.594

5805 MHz

EIRP (dBm)	EIRP (mW)
10.14	10.328

The test was performed on the worst case data rate for 802.11(a) modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 54Mbps.



Product Service

Limit for Conducted

Frequency Band (MHz)	FCC Limit	IC Limit
5150 to 5250	Lesser of 50 mW or 4 dBm + 10 log B	-
5250 to 5350	Lesser of 250 mW or 11 dBm + 10 log B	Lesser of 250 mW or 11 dBm + 10 log B
5470 to 5725	Lesser of 250 mW or 11 dBm + 10 log B	Lesser of 250 mW or 11 dBm + 10 log B
5725 to 5825	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B

Note: For FCC limit, "B" = 26 dB Bandwidth. For IC limit "B" = 99% Occupied Bandwidth.



Product Service


802.11(a) – External Antenna

Radiated

Frequency Band 1

5180 MHz

EIRP (dBm)	EIRP (mW)
16.62	45.92

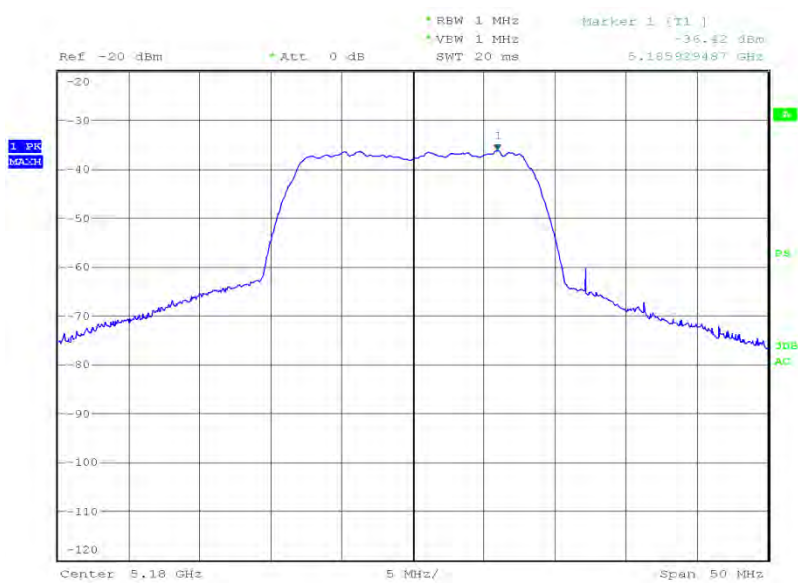


Date: 9.APR.2012 13:50:22



Product Service

5220 MHz

EIRP (dBm)	EIRP (mW)
15.98	39.63

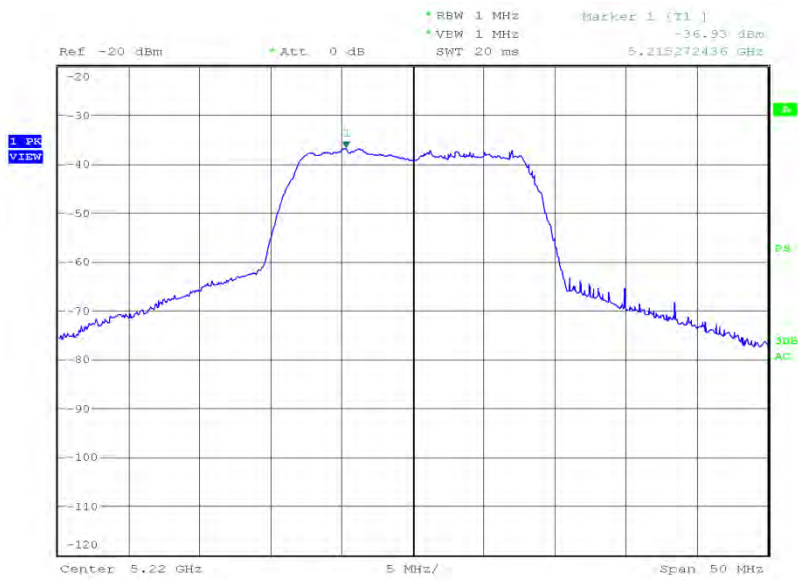


Date: 9.APR.2012 13:59:19



Product Service

5240 MHz

EIRP (dBm)	EIRP (mW)
16.26	42.27

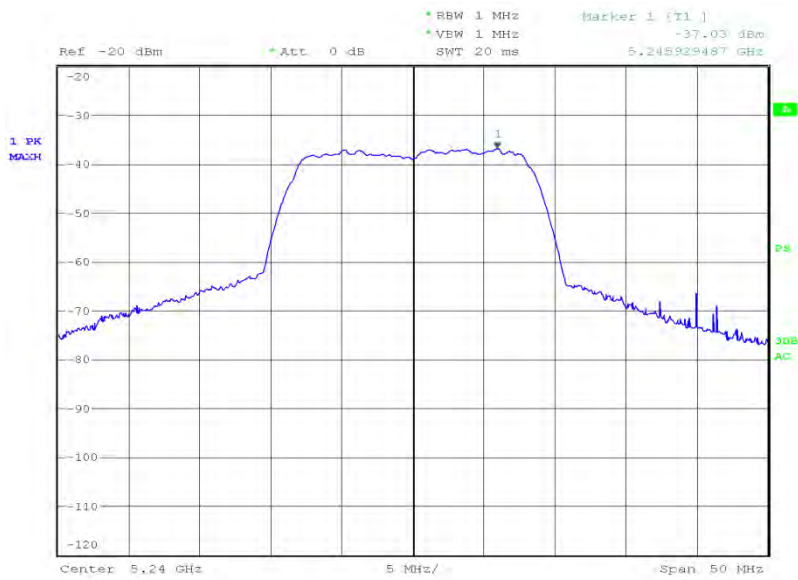

Date: 9.APR.2012 14:04:22




Product Service

Radiated

Frequency Band 2

5260 MHz

EIRP (dBm)	EIRP (mW)
15.14	32.66

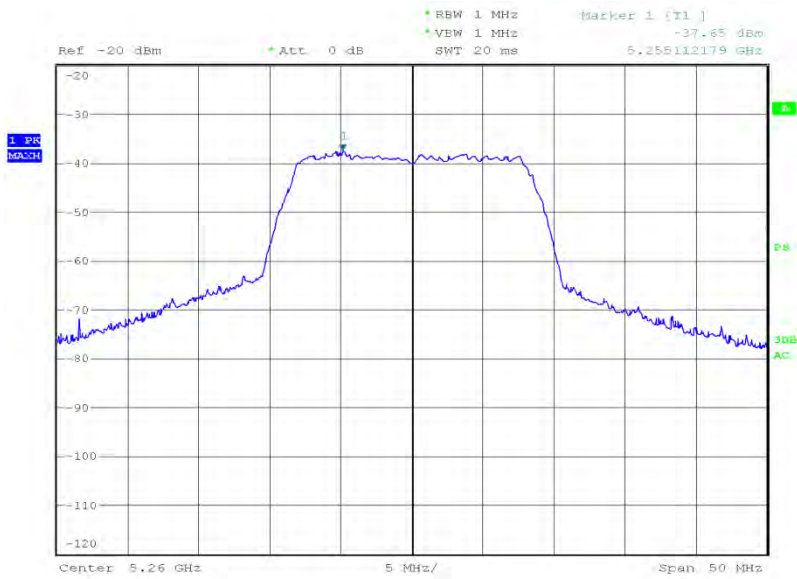


Date: 9.APR.2012 14:17:46



Product Service

5300 MHz

EIRP (dBm)	EIRP (mW)
15.53	35.73

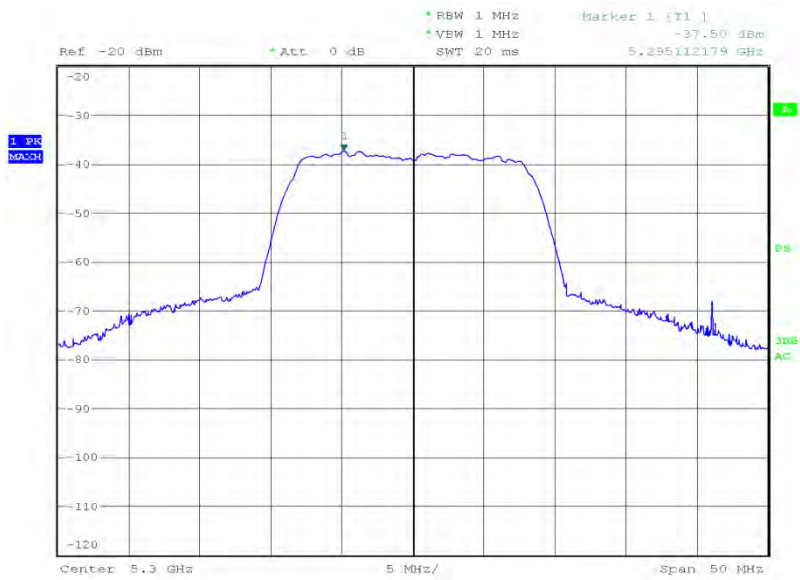


Date: 9.APR.2012 14:27:25



Product Service

5320 MHz

EIRP (dBm)	EIRP (mW)
16.31	42.76

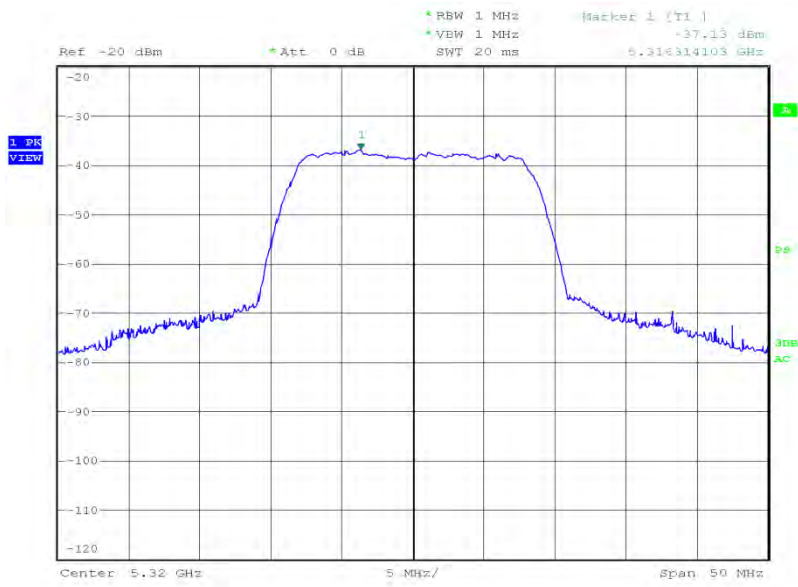

Date: 9.APR.2012 14:33:03




Product Service

Radiated

Frequency Band 3

5500 MHz

EIRP (dBm)	EIRP (mW)
15.08	32.21

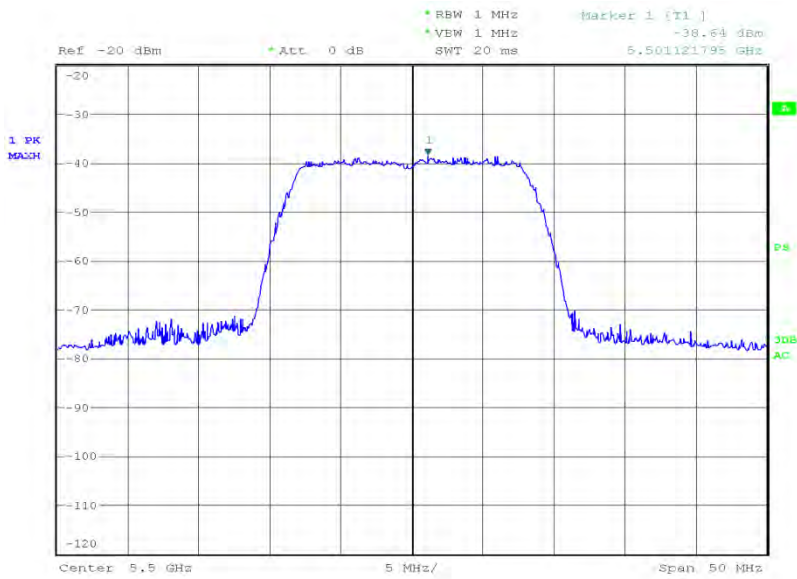


Date: 9.APR.2012 14:38:58



Product Service

5600 MHz

EIRP (dBm)	EIRP (mW)
15.69	37.07

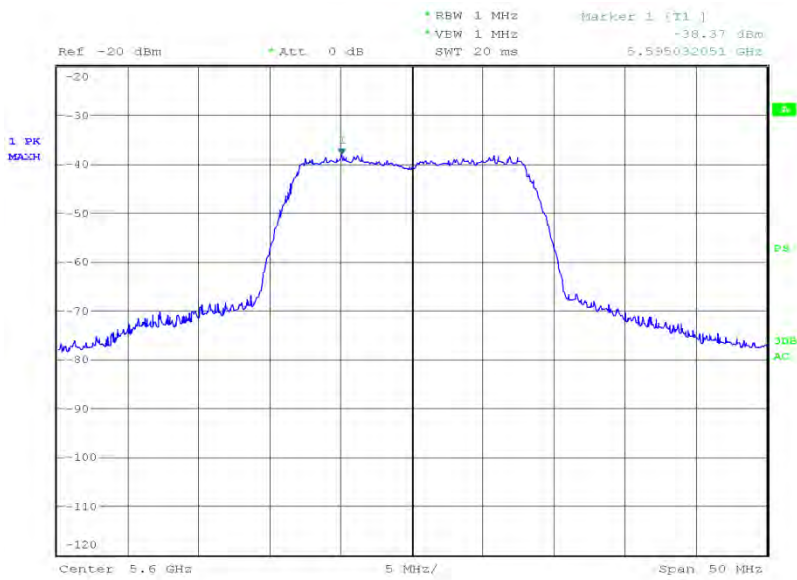


Date: 9.APR.2012 14:50:23



Product Service

5700 MHz

EIRP (dBm)	EIRP (mW)
16.72	46.99

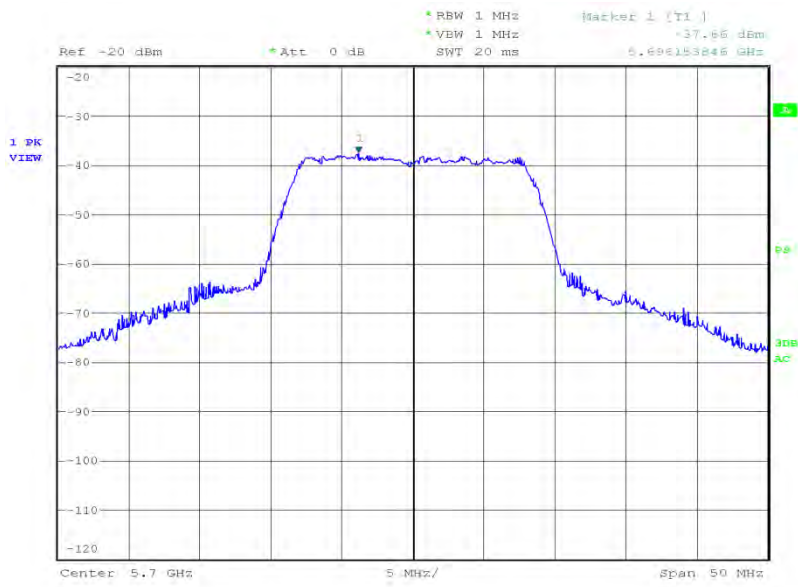

Date: 9.APR.2012 14:53:51




Product Service

Radiated

Frequency Band 4

5745 MHz

EIRP (dBm)	EIRP (mW)
17.29	53.58

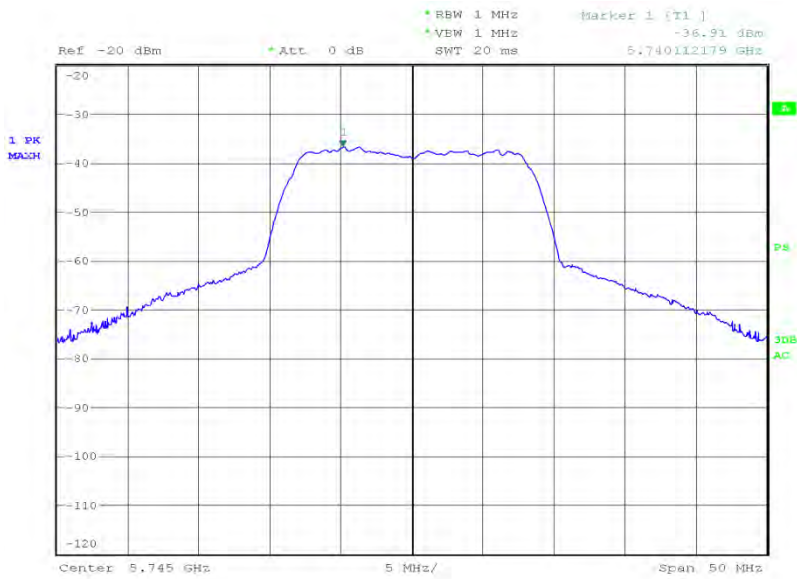


Date: 9.APR.2012 14:57:32



Product Service

5785 MHz

EIRP (dBm)	EIRP (mW)
17.26	53.21

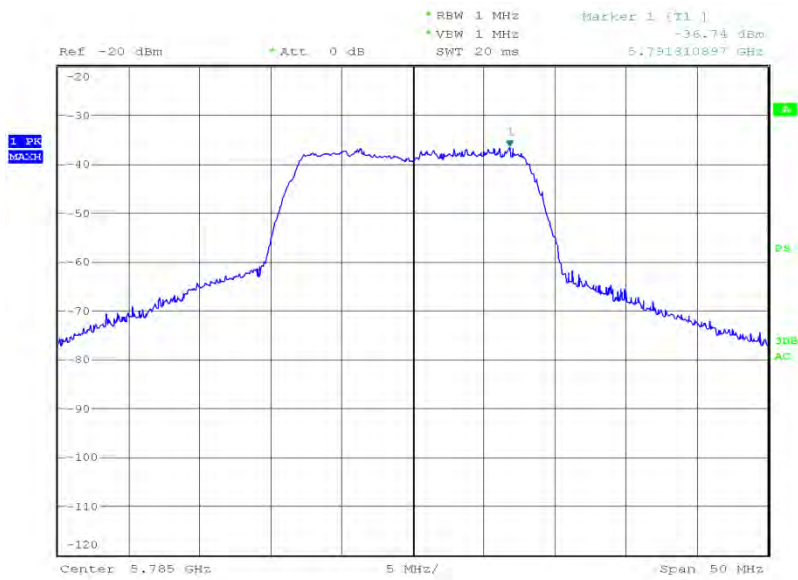


Date: 9.APR.2012 15:00:51



Product Service

5805 MHz

EIRP (dBm)	EIRP (mW)
17.19	52.36

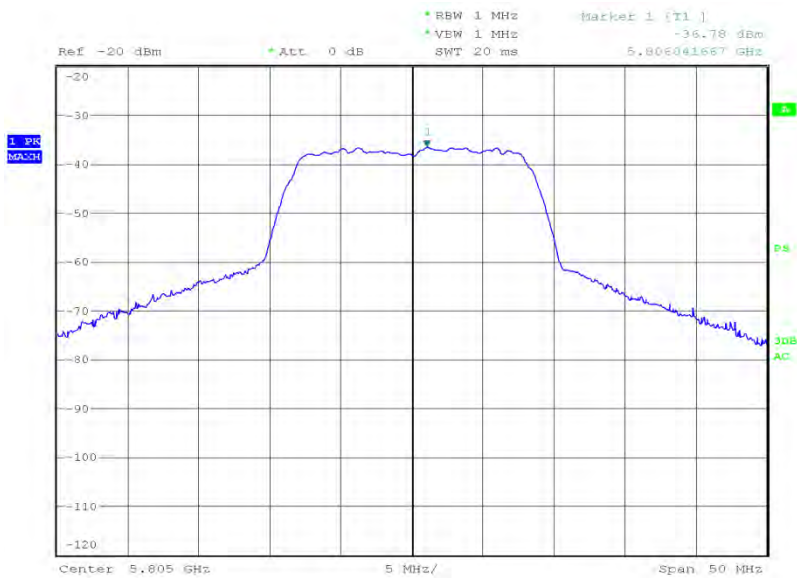

Date: 9.APR.2012 15:05:09

Limit for Radiated

Frequency Band (MHz)	FCC Limit	IC Limit
5150 to 5250	Lesser of 200 mW or 10 dBm + 10 log B	Lesser of 200 mW or 10 dBm + 10 log B
5250 to 5350	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5470 to 5725	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5725 to 5825	Lesser of 4 W or 23 dBm + 10 log B	Lesser of 4 W or 23 dBm + 10 log B

Note: For FCC limit, "B" = 26 dB Bandwidth. For IC limit "B" = 99% Occupied Bandwidth.
For FCC only – It is acceptable to have an antenna with up to 6 dBi gain, without reducing the conducted output power.



Product Service


802.11(n) - 5 GHz, 20 MHz BW – Onboard PIFA Antenna

Radiated

Frequency Band 1

5180 MHz

EIRP (dBm)	EIRP (mW)
17.10	51.29

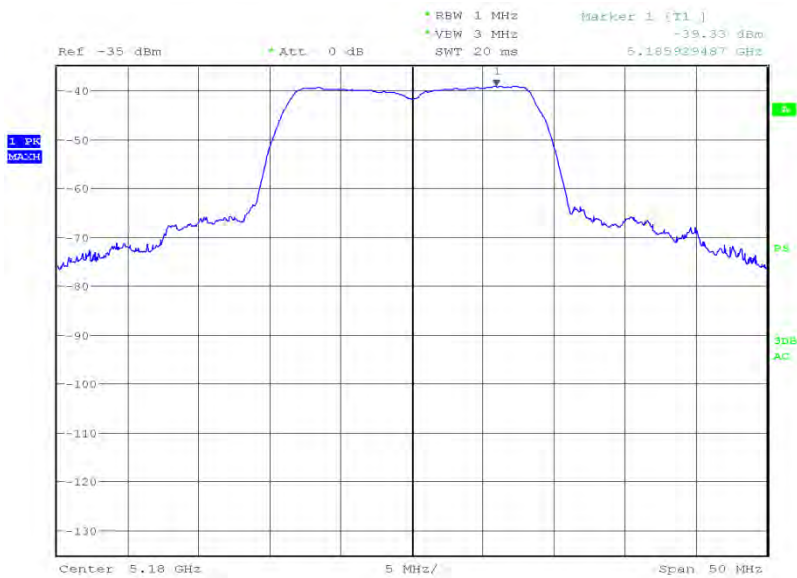


Date: 7,MAR,2012 19:04:55



Product Service

5220 MHz

EIRP (dBm)	EIRP (mW)
16.58	45.50

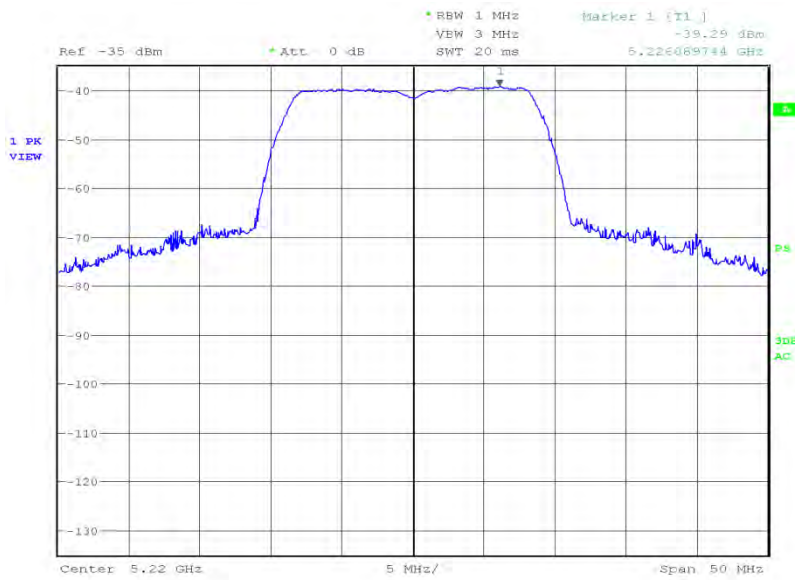


Date: 10.MAR.2012 11:10:24



Product Service

5240 MHz

EIRP (dBm)	EIRP (mW)
17.31	53.83

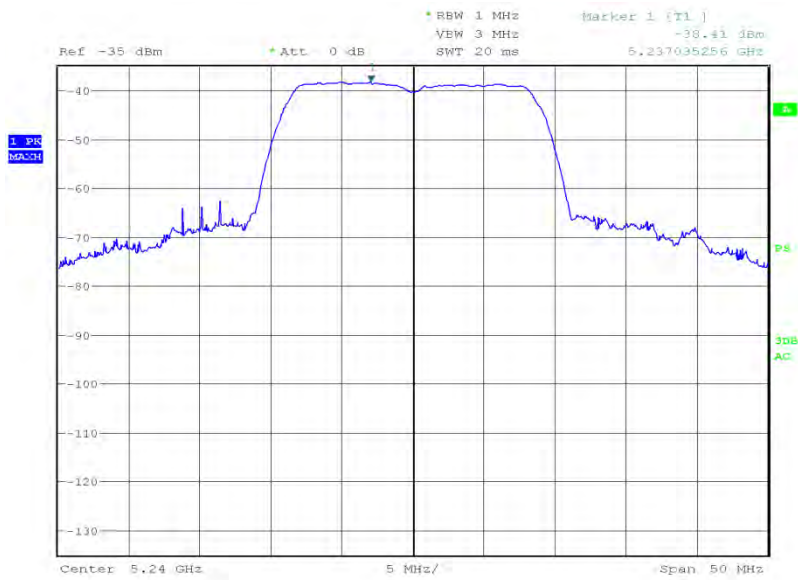

Date: 10.MAR.2012 11:20:20




Product Service

Radiated

Frequency Band 2

5260 MHz

EIRP (dBm)	EIRP (mW)
16.89	48.87

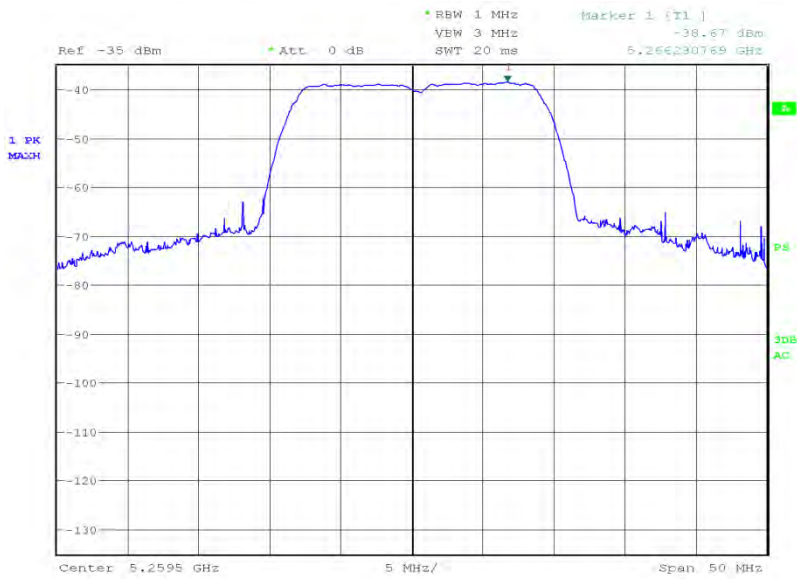


Date: 10.MAR.2012 11:40:03



Product Service

5300 MHz

EIRP (dBm)	EIRP (mW)
16.36	43.25

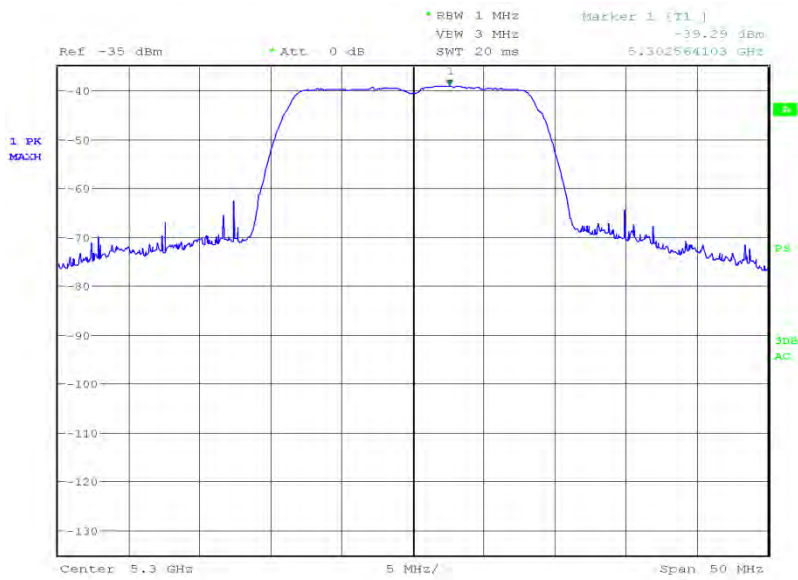


Date: 10.MAR.2012 11:51:17



Product Service

5320 MHz

EIRP (dBm)	EIRP (mW)
18.70	74.13

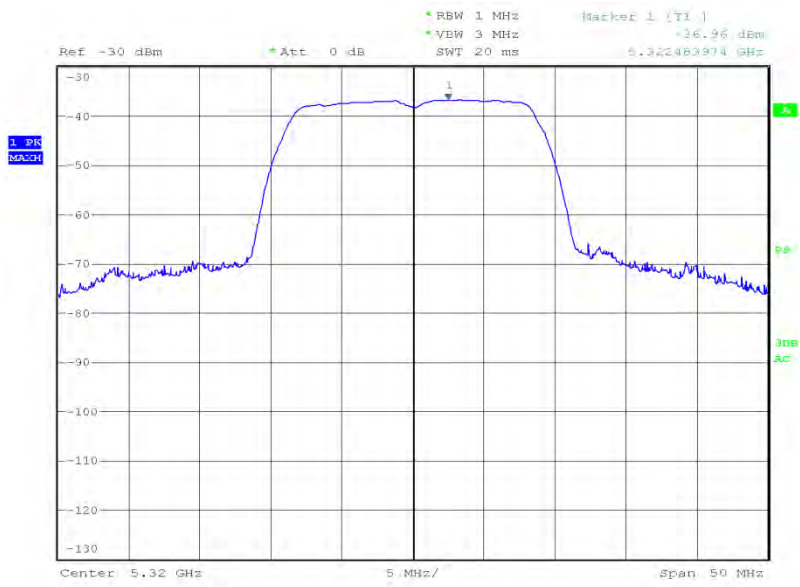


Date: 7.MAR.2012 19:25:39



Product Service

Radiated
Frequency Band 3
5500 MHz

EIRP (dBm)	EIRP (mW)
16.34	46.13

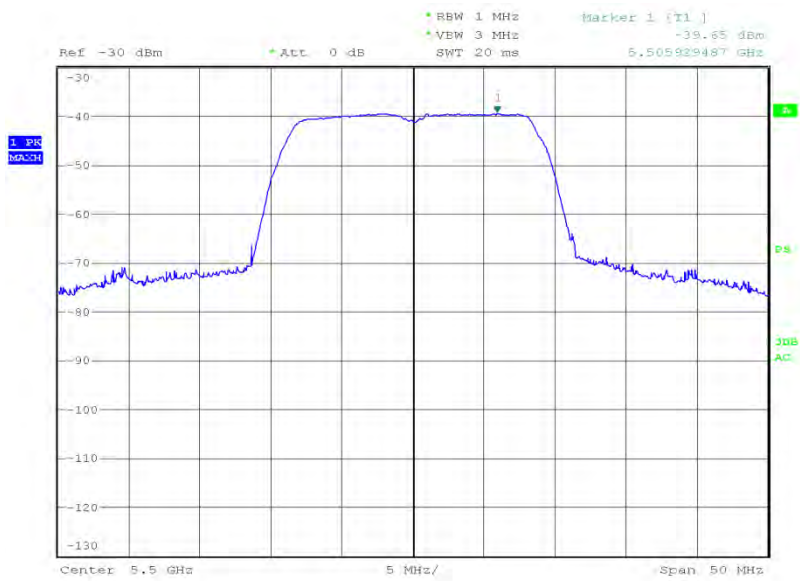


Date: 7.MAR.2012 19:38:21



Product Service

5600 MHz

EIRP (dBm)	EIRP (mW)
15.35	34.28

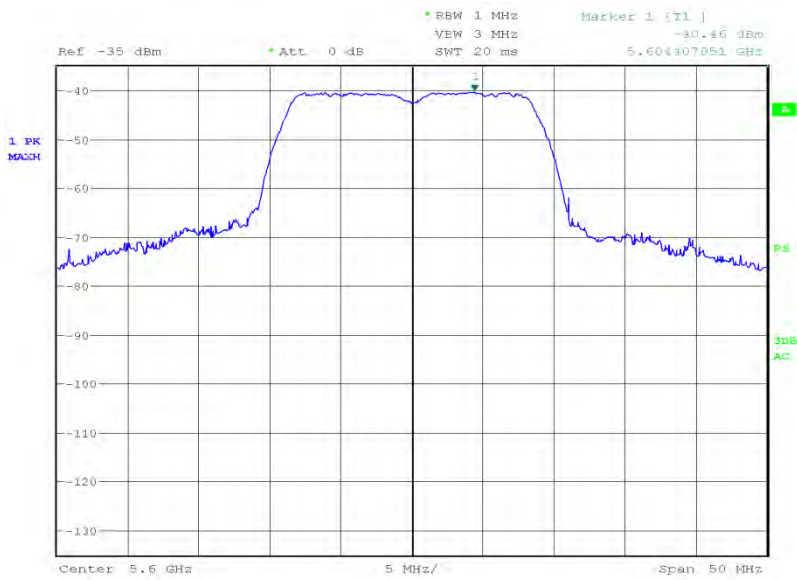


Date: 10.MAR.2012 12:22:19



Product Service

5700 MHz

EIRP (dBm)	EIRP (mW)
15.68	36.98

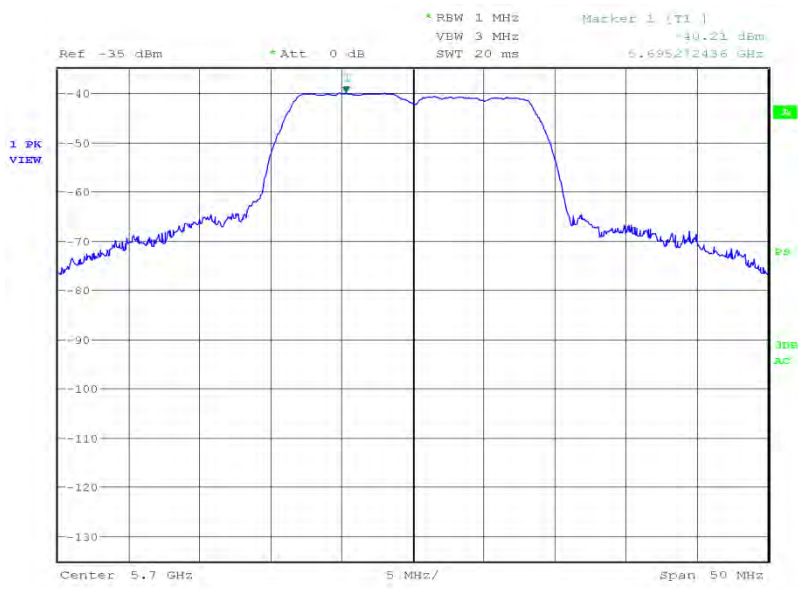

Date: 10.MAR.2012 12:19:12




Product Service

Radiated

Frequency Band 4

5745 MHz

EIRP (dBm)	EIRP (mW)
14.80	30.20

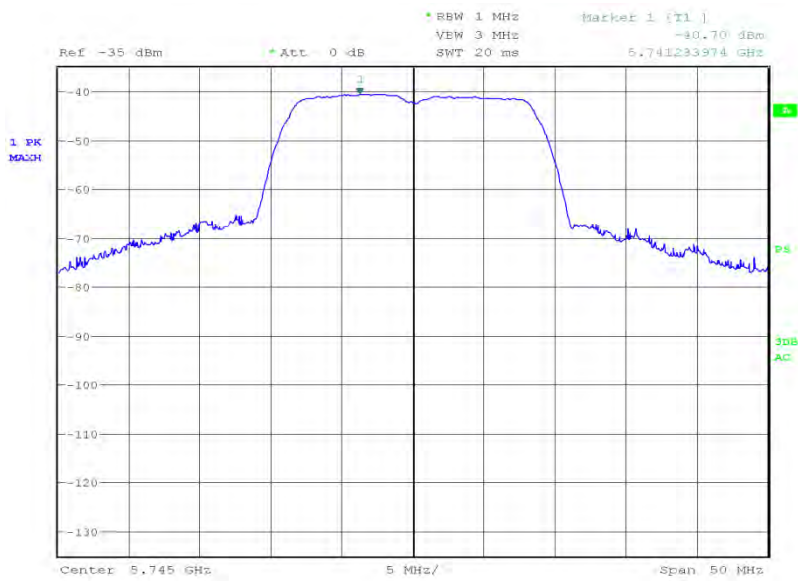


Date: 10,MAR,2012 12:53:22



Product Service

5785 MHz

EIRP (dBm)	EIRP (mW)
13.55	22.65

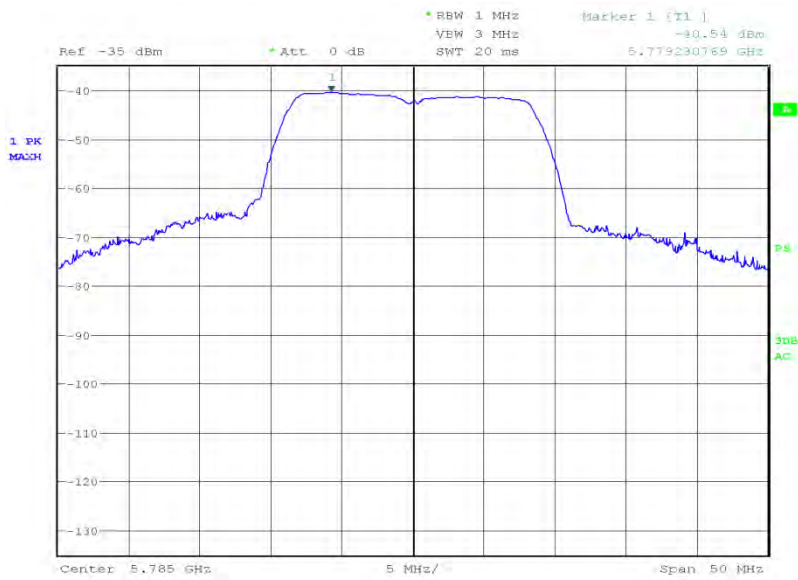


Date: 10.MAR.2012 13:07:04



Product Service

5805 MHz

EIRP (dBm)	EIRP (mW)
14.19	26.24

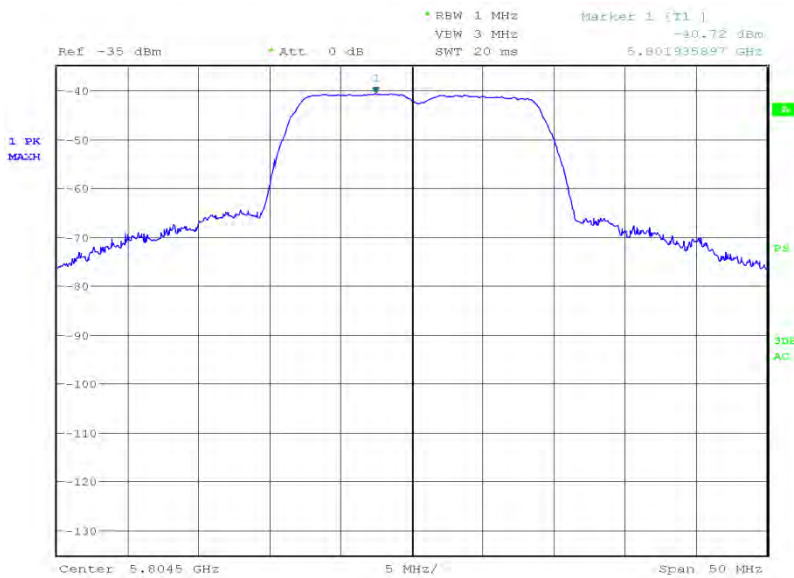

Date: 10.MAR.2012 13:18:35

Limit for Radiated

Frequency Band (MHz)	FCC Limit	IC Limit
5150 to 5250	Lesser of 50 mW or 4 dBm + 10 log B	-
5250 to 5350	Lesser of 250 mW or 11 dBm + 10 log B	Lesser of 250 mW or 11 dBm + 10 log B
5470 to 5725	Lesser of 250 mW or 11 dBm + 10 log B	Lesser of 250 mW or 11 dBm + 10 log B
5725 to 5825	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B

Note: For FCC limit, “B” = 26 dB Bandwidth. For IC limit “B” = 99% Occupied Bandwidth.
For FCC only – It is acceptable to have an antenna with up to 6 dBi gain, without reducing the conducted output power.

ConductedFrequency Band 15180 MHz

EIRP (dBm)	EIRP (mW)
9.93	9.840

5220 MHz

EIRP (dBm)	EIRP (mW)
10.61	11.508

5240 MHz

EIRP (dBm)	EIRP (mW)
10.72	11.803

The test was performed on the worst case data rate for 802.11(n) - 20 MHz BW modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 21.70 Mbps.

ConductedFrequency Band 25260 MHz

EIRP (dBm)	EIRP (mW)
10.03	10.069

5300 MHz

EIRP (dBm)	EIRP (mW)
9.17	8.260

5320 MHz

EIRP (dBm)	EIRP (mW)
9.98	9.954

The test was performed on the worst case data rate for 802.11(n) - 20 MHz BW modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 21.70 Mbps.



Product Service

ConductedFrequency Band 35500 MHz

EIRP (dBm)	EIRP (mW)
9.18	8.28

5600 MHz

EIRP (dBm)	EIRP (mW)
9.09	8.110

5700 MHz

EIRP (dBm)	EIRP (mW)
9.89	9.750

The test was performed on the worst case data rate for 802.11(n) - 20 MHz BW modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 21.70 Mbps.

ConductedFrequency Band 45745 MHz

EIRP (dBm)	EIRP (mW)
10.06	10.139

5785 MHz

EIRP (dBm)	EIRP (mW)
9.80	9.550

5805 MHz

EIRP (dBm)	EIRP (mW)
10.05	10.116

The test was performed on the worst case data rate for 802.11(n) - 20 MHz BW modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 21.70 Mbps.



Product Service

Limit for Conducted

Frequency Band (MHz)	FCC Limit	IC Limit
5150 to 5250	Lesser of 50 mW or 4 dBm + 10 log B	-
5250 to 5350	Lesser of 250 mW or 11 dBm + 10 log B	Lesser of 250 mW or 11 dBm + 10 log B
5470 to 5725	Lesser of 250 mW or 11 dBm + 10 log B	Lesser of 250 mW or 11 dBm + 10 log B
5725 to 5825	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B

Note: For FCC limit, "B" = 26 dB Bandwidth. For IC limit "B" = 99% Occupied Bandwidth.



Product Service


802.11(n) - 5 GHz 20MHz Bandwidth – External Antenna

Radiated

Frequency Band 1

5180 MHz

EIRP (dBm)	EIRP (mW)
18.12	64.86

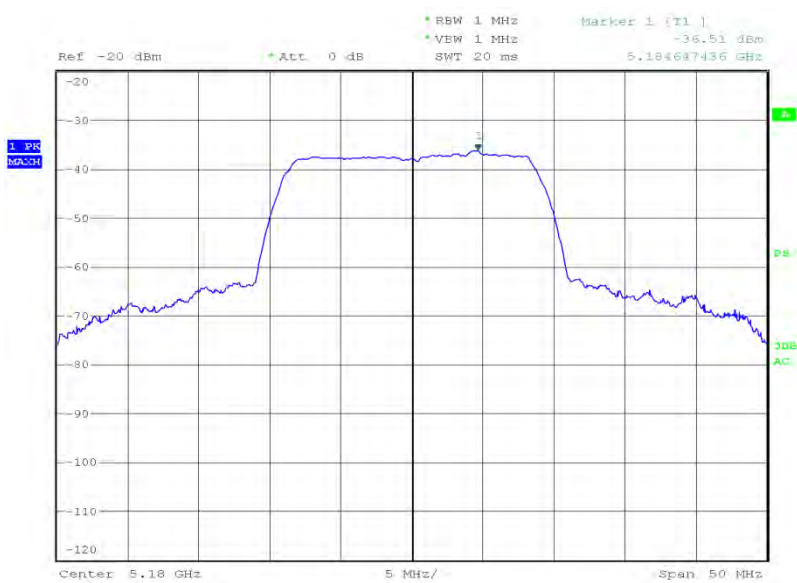


Date: 10.APR.2012 16:34:44



Product Service

5220 MHz

EIRP (dBm)	EIRP (mW)
17.62	57.81

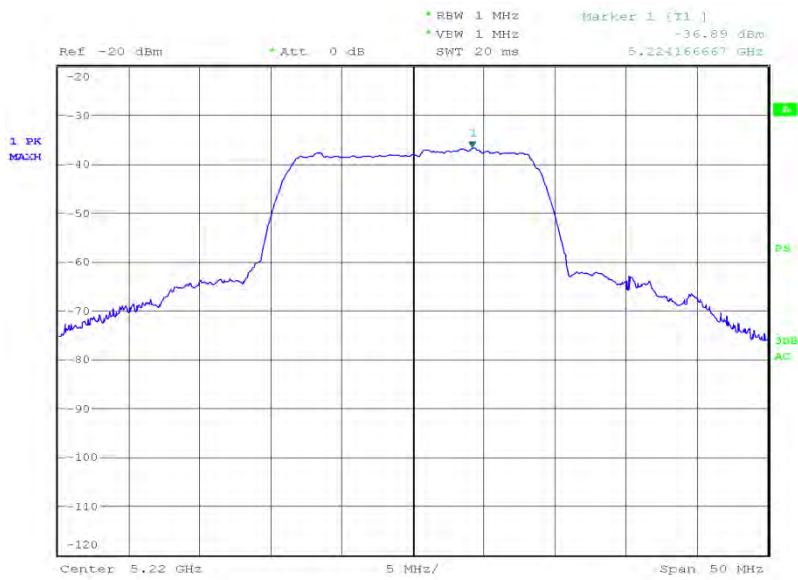


Date: 10.APR.2012 16:44:59



Product Service

5240 MHz

EIRP (dBm)	EIRP (mW)
16.70	46.77

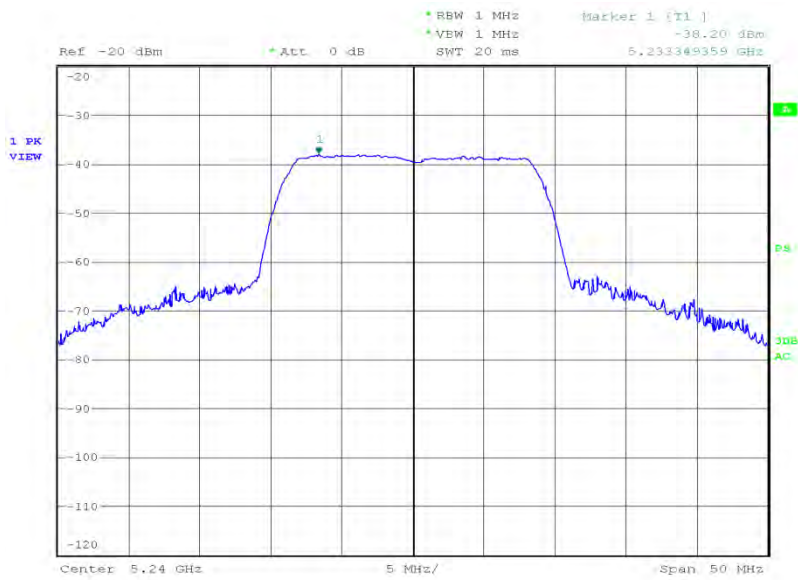

Date: 10.APR.2012 16:51:38




Product Service

Radiated

Frequency Band 2

5260 MHz

EIRP (dBm)	EIRP (mW)
16.55	45.19

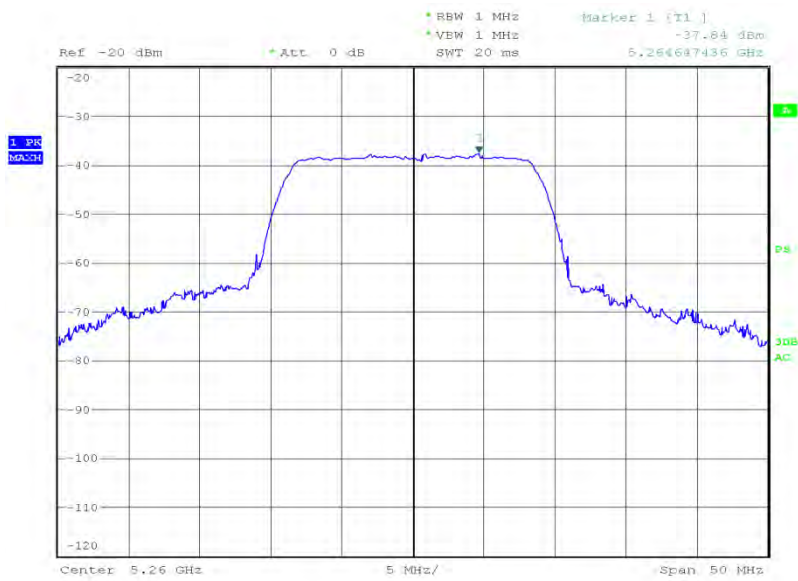


Date: 10.APR.2012 16:58:05



Product Service

5300 MHz

EIRP (dBm)	EIRP (mW)
16.23	41.98

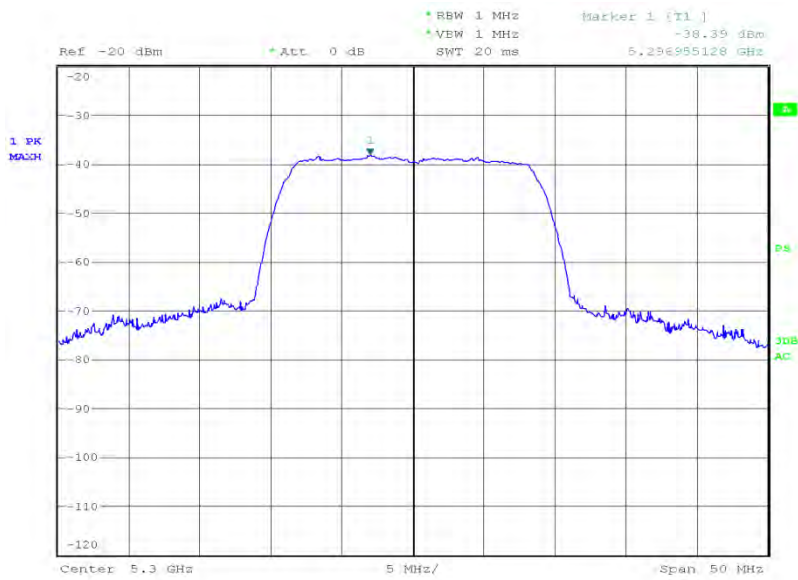


Date: 10.APR.2012 17:12:06



Product Service

5320 MHz

EIRP (dBm)	EIRP (mW)
14.98	31.48

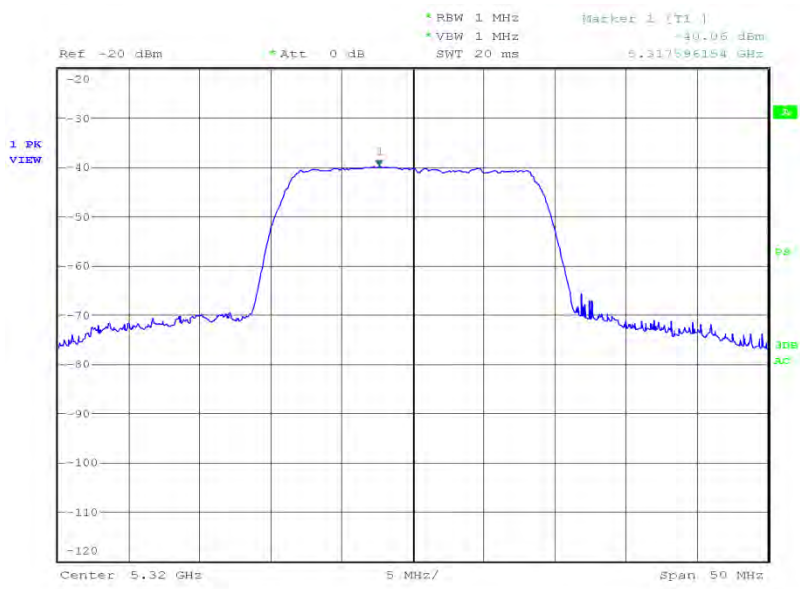

Date: 10.APR.2012 17:30:14




Product Service

Radiated

Frequency Band 3

5500 MHz

EIRP (dBm)	EIRP (mW)
15.59	36.22

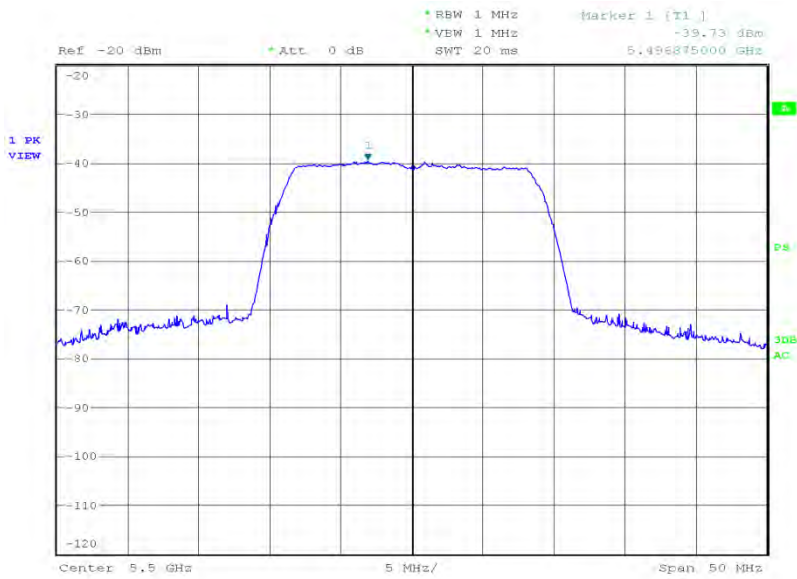


Date: 10.APR.2012 17:43:37



Product Service

5600 MHz

EIRP (dBm)	EIRP (mW)
15.57	36.06

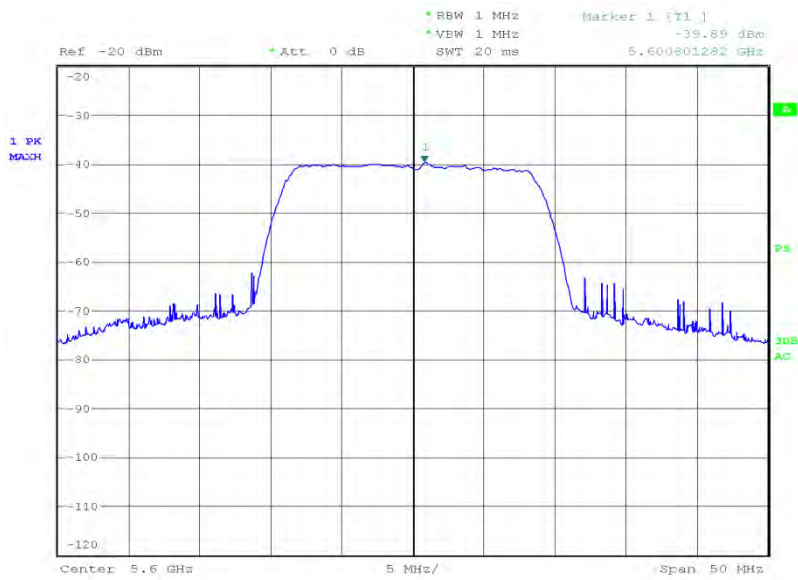


Date: 10.APR.2012 17:58:44



Product Service

5700 MHz

EIRP (dBm)	EIRP (mW)
17.03	50.47

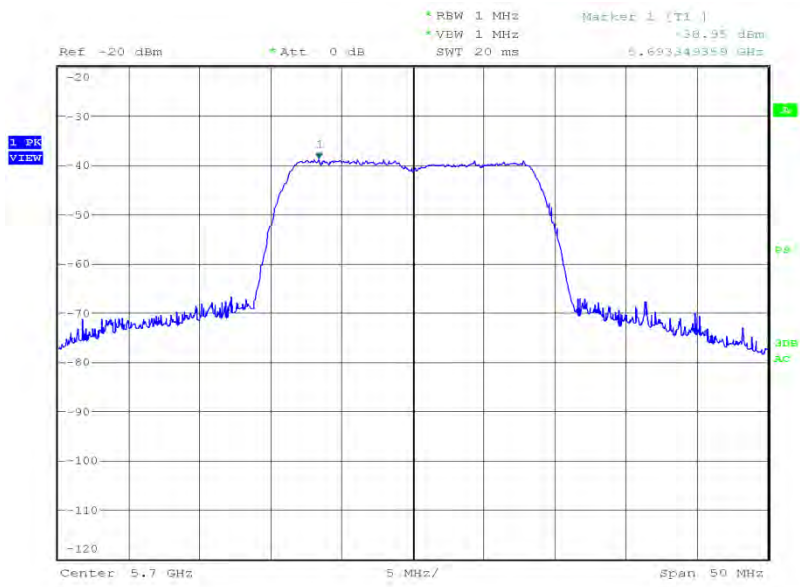

Date: 10.APR.2012 18:09:00




Product Service

Radiated

Frequency Band 4

5745 MHz

EIRP (dBm)	EIRP (mW)
16.51	44.77

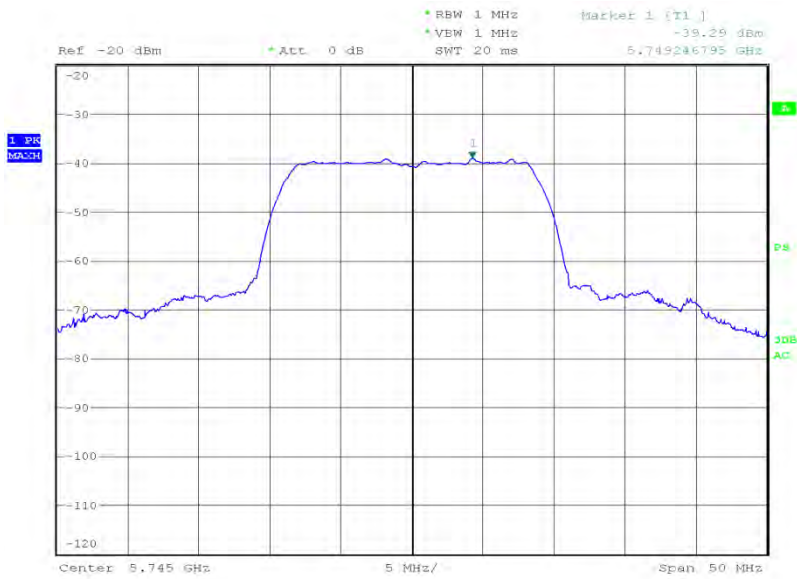


Date: 10.APR.2012 18:22:14



Product Service

5785 MHz

EIRP (dBm)	EIRP (mW)
16.87	48.64

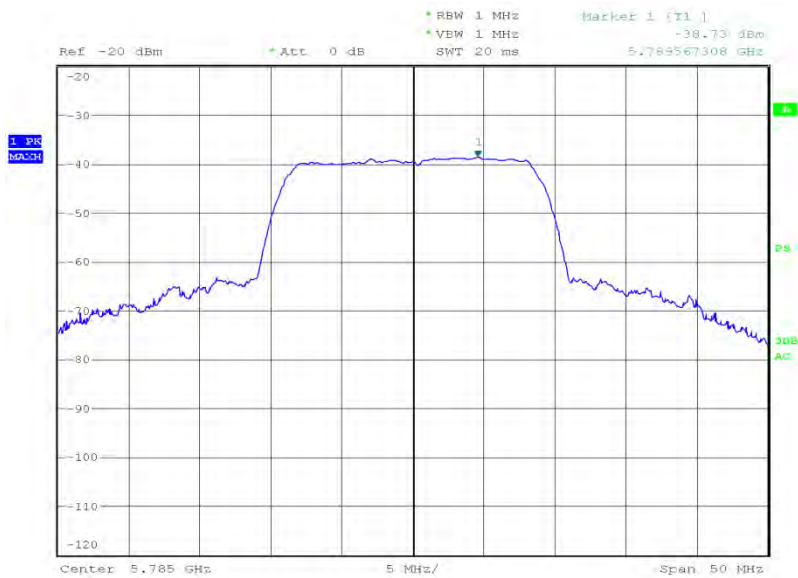


Date: 10.APR.2012 18:27:19



Product Service

5805 MHz

EIRP (dBm)	EIRP (mW)
17.41	55.08

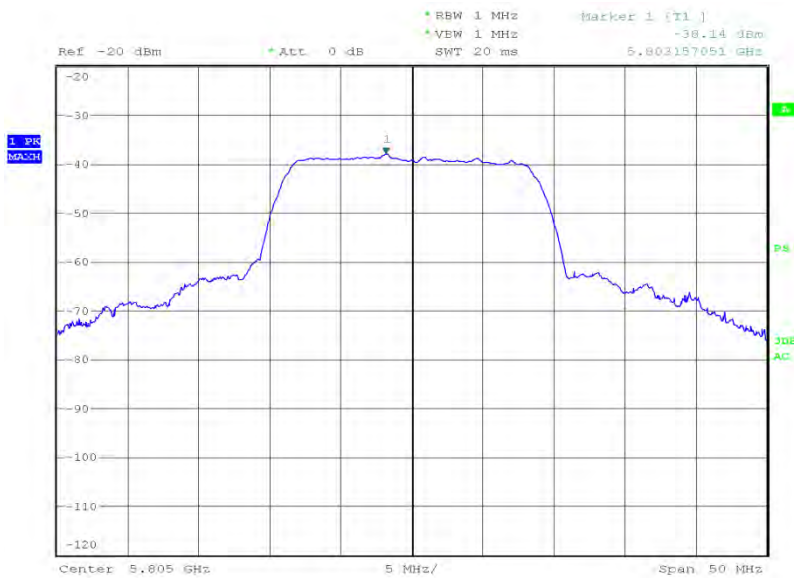

Date: 10.APR.2012 18:48:34

Limit for Radiated

Frequency Band (MHz)	FCC Limit	IC Limit
5150 to 5250	Lesser of 200 mW or 10 dBm + 10 log B	Lesser of 200 mW or 10 dBm + 10 log B
5250 to 5350	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5470 to 5725	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5725 to 5825	Lesser of 4 W or 23 dBm + 10 log B	Lesser of 4 W or 23 dBm + 10 log B

Note: For FCC limit, "B" = 26 dB Bandwidth. For IC limit "B" = 99% Occupied Bandwidth.
For FCC only – It is acceptable to have an antenna with up to 6 dBi gain, without reducing the conducted output power.



Product Service


802.11(n) - 5 GHz 40 MHz BW – Onboard PIFA Antenna

Radiated

Frequency Band 1

5190 MHz

EIRP (dBm)	EIRP (mW)
+11.65	14.62

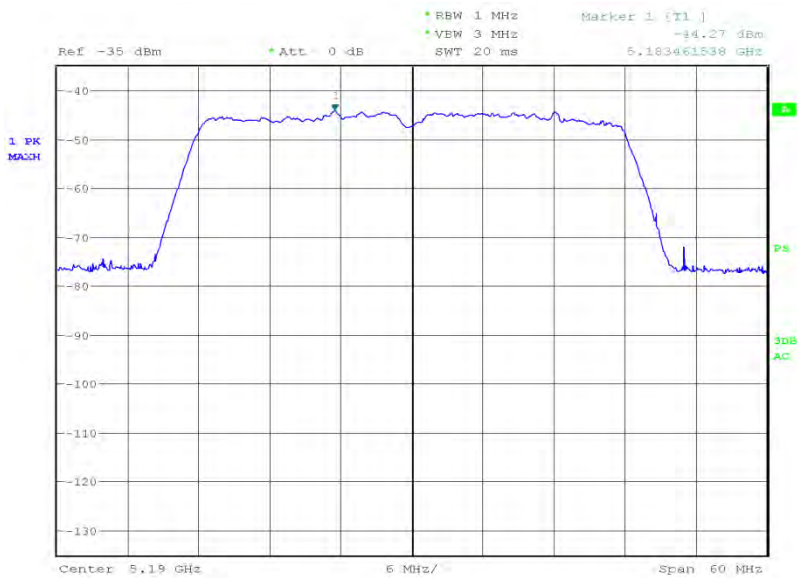


Date: 18.MAR.2012 08:50:52



Product Service

5230 MHz

EIRP (dBm)	EIRP (mW)
11.99	15.81

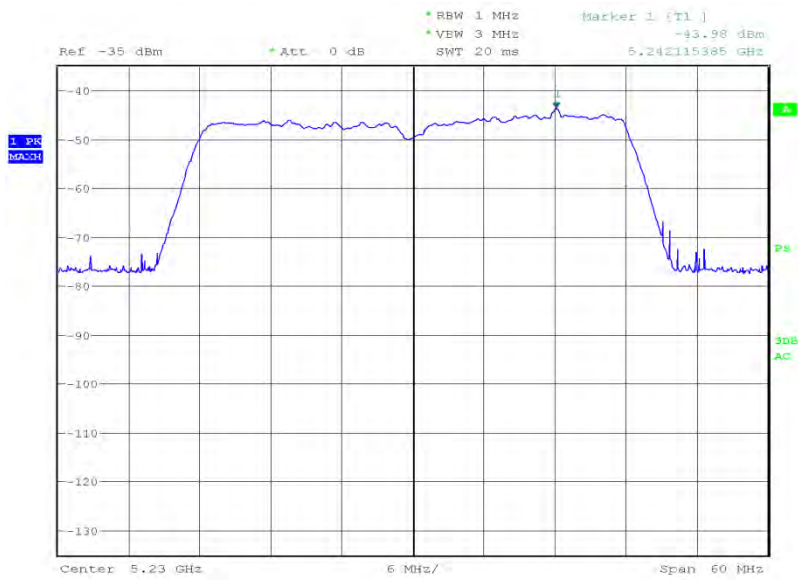

Date: 18.MAR.2012 09:04:20




Product Service

Radiated

Frequency Band 2

5270 MHz

EIRP (dBm)	EIRP (mW)
13.37	21.73

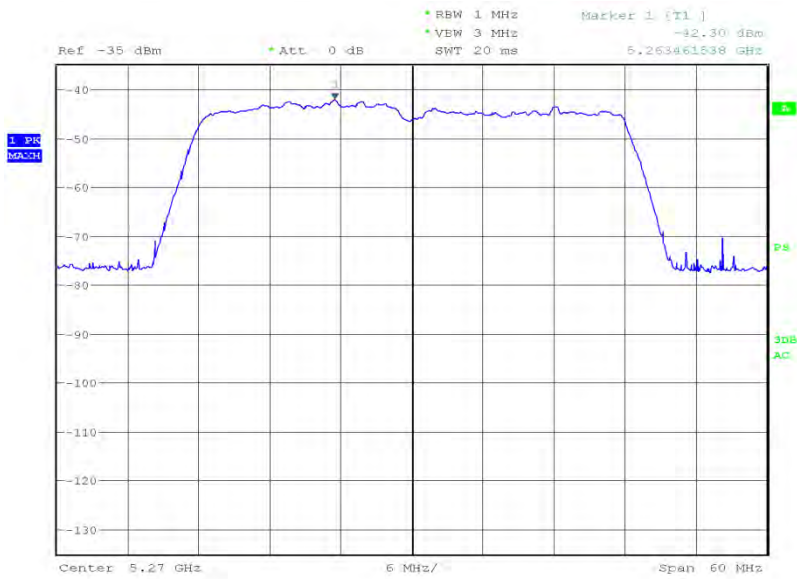


Date: 18.MAR.2012 09:20:00



Product Service

5310 MHz

EIRP (dBm)	EIRP (mW)
12.28	16.90

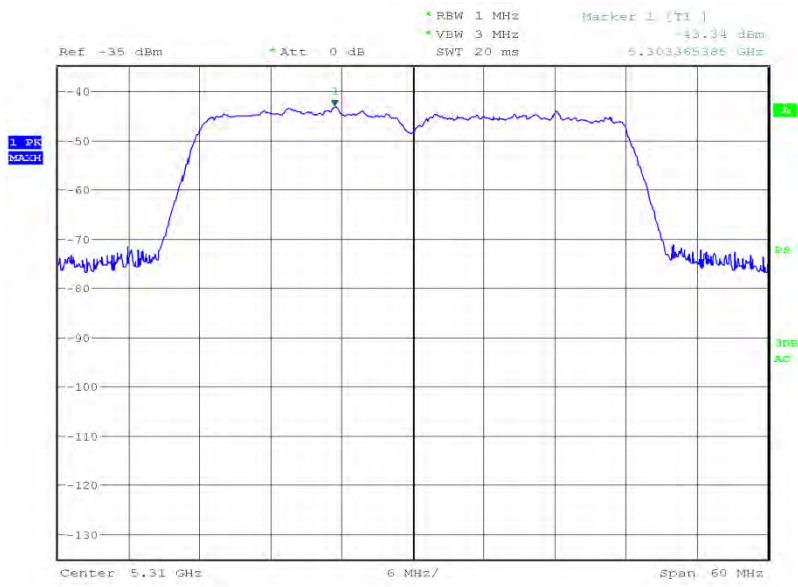

Date: 18.MAR.2012 09:30:43




Product Service

Radiated

Frequency Band 3

5510 MHz

EIRP (dBm)	EIRP (mW)
10.42	11.02

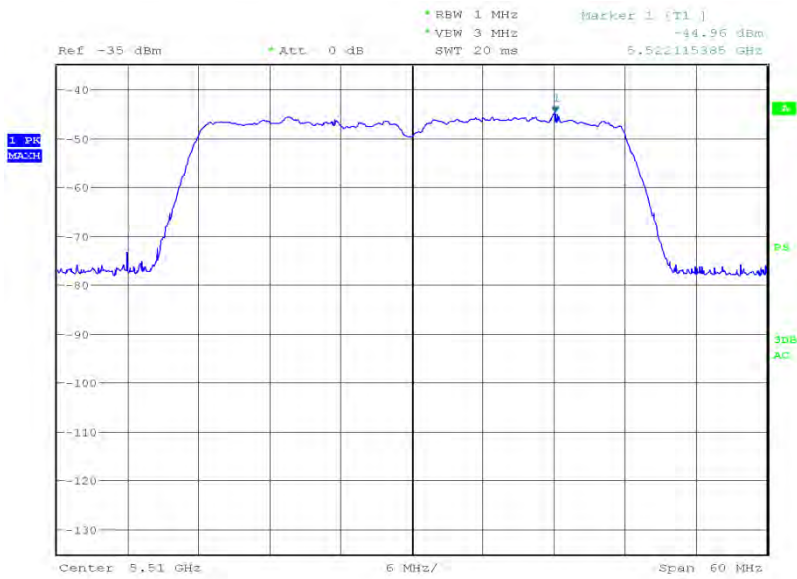


Date: 18.MAR.2012 10:28:02



Product Service

5590 MHz

EIRP (dBm)	EIRP (mW)
11.13	12.97

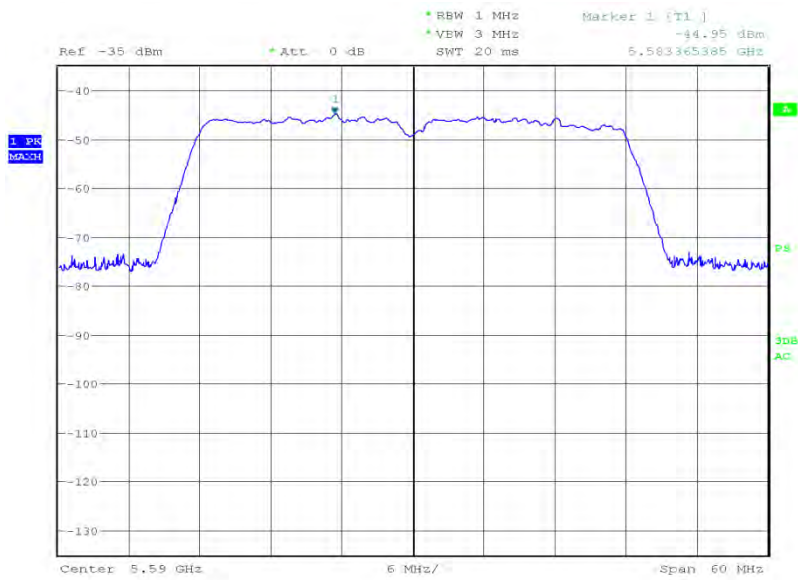


Date: 18.MAR.2012 10:37:15



Product Service

5670 MHz

EIRP (dBm)	EIRP (mW)
11.08	12.82

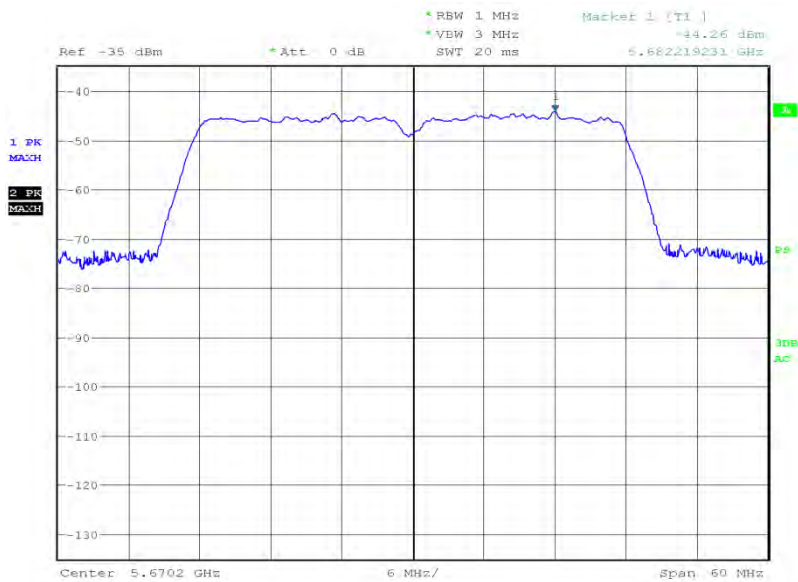

Date: 18.MAR.2012 10:48:14




Product Service

Radiated

Frequency Band 4

5755 MHz


EIRP (dBm)	EIRP (mW)
8.83	7.64

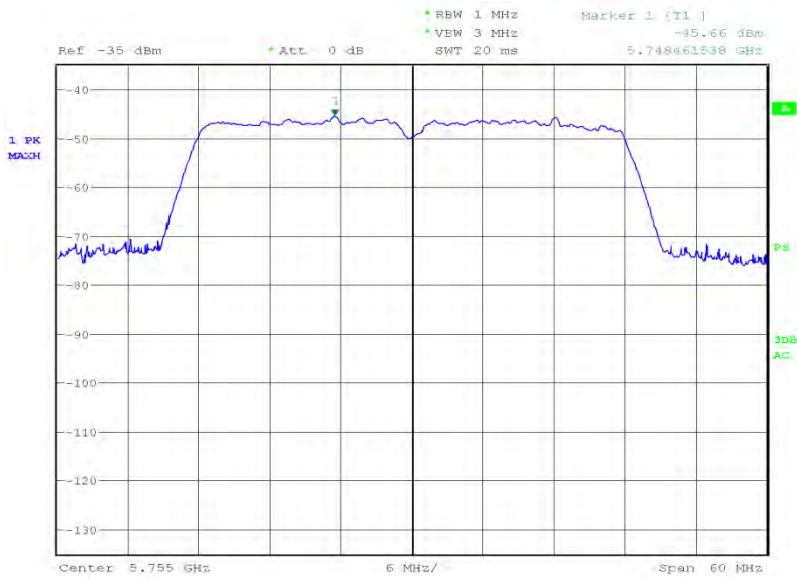

Date: 18.MAR.2012 10:55:33

5795 MHz

EIRP (dBm)	EIRP (mW)
8.94	7.83

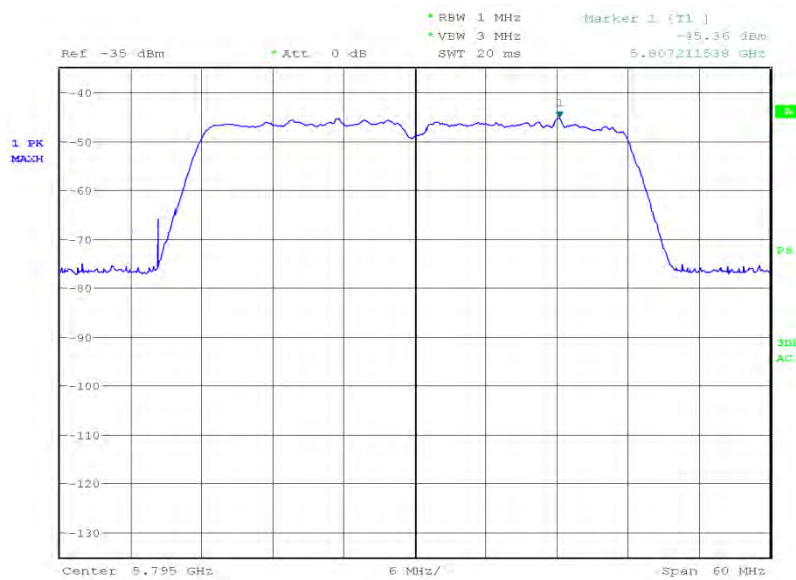

Date: 18.MAR.2012 11:07:52

Limit for Radiated

Frequency Band (MHz)	FCC Limit	IC Limit
5150 to 5250	Lesser of 200 mW or 10 dBm + 10 log B	Lesser of 200 mW or 10 dBm + 10 log B
5250 to 5350	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5470 to 5725	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5725 to 5825	Lesser of 4 W or 23 dBm + 10 log B	Lesser of 4 W or 23 dBm + 10 log B

Note: For FCC limit, "B" = 26 dB Bandwidth. For IC limit "B" = 99% Occupied Bandwidth.
 For FCC only – It is acceptable to have an antenna with up to 6 dBi gain, without reducing the conducted output power.

For 802.11(n) – 40 MHz Bandwidth, the middle channel was not tested in Frequency Bands 1, 2 and 4. A signal width of 40 MHz means a measurement on the bottom and top channels will satisfy the requirements in these frequency bands.



Product Service

802.11(n) - 5 GHz 40 MHz BW – Onboard PIFA AntennaConductedFrequency Band 15190 MHz

EIRP (dBm)	EIRP (mW)
10.49	11.194

5230 MHz

EIRP (dBm)	EIRP (mW)
10.78	11.967

The test was performed on the worst case data rate for 802.11(n) - 40 MHz BW modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 135Mbps.

ConductedFrequency Band 25270 MHz

EIRP (dBm)	EIRP (mW)
9.79	9.528

5310 MHz

EIRP (dBm)	EIRP (mW)
9.61	9.141

The test was performed on the worst case data rate for 802.11(n) - 40 MHz BW modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 135Mbps.



Product Service

ConductedFrequency Band 35510 MHz

EIRP (dBm)	EIRP (mW)
9.26	8.433

5590 MHz

EIRP (dBm)	EIRP (mW)
9.40	8.710

5670 MHz

EIRP (dBm)	EIRP (mW)
9.84	9.638

The test was performed on the worst case data rate for 802.11(n) - 40 MHz BW modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 135Mbps.

ConductedFrequency Band 45755 MHz

EIRP (dBm)	EIRP (mW)
9.76	9.462

5795 MHz

EIRP (dBm)	EIRP (mW)
9.83	9.616

The test was performed on the worst case data rate for 802.11(n) - 40 MHz BW modulation. The worst case was deemed as the data rate which produced the highest level of conducted average power. This data rate was 135Mbps.



Product Service

Limit for Conducted

Frequency Band (MHz)	FCC Limit	IC Limit
5150 to 5250	Lesser of 50 mW or 4 dBm + 10 log B	-
5250 to 5350	Lesser of 250 mW or 11 dBm + 10 log B	Lesser of 250 mW or 11 dBm + 10 log B
5470 to 5725	Lesser of 250 mW or 11 dBm + 10 log B	Lesser of 250 mW or 11 dBm + 10 log B
5725 to 5825	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B

Note: For FCC limit, "B" = 26 dB Bandwidth. For IC limit "B" = 99% Occupied Bandwidth.

For 802.11(n) – 40 MHz Bandwidth, the middle channel was not tested in Frequency Bands 1, 2 and 4. A signal width of 40 MHz means a measurement on the bottom and top channels will satisfy the requirements in these frequency bands.



Product Service


802.11(n) - 5 GHz 40MHz BW – External Antenna

Radiated

Frequency Band 1

5190 MHz

EIRP (dBm)	EIRP (mW)
13.22	20.99

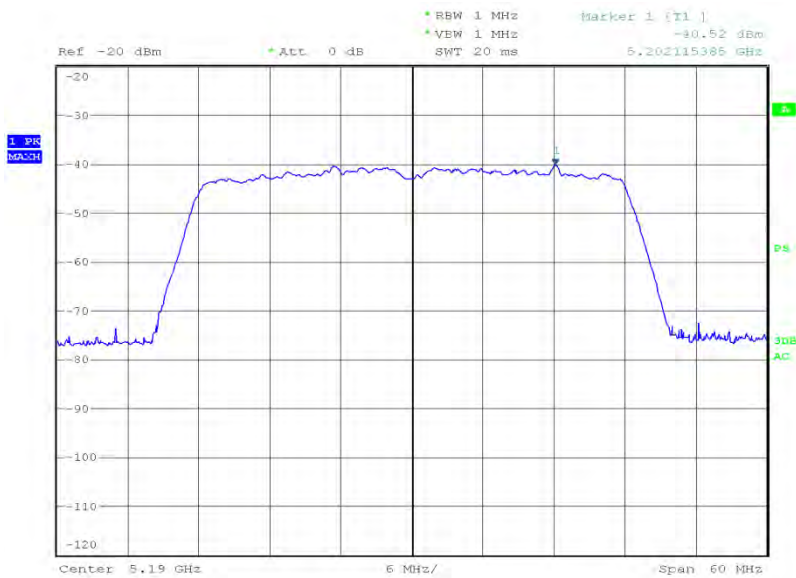


Date: 10,APR,2012 19:31:07



Product Service

5230 MHz

EIRP (dBm)	EIRP (mW)
12.73	18.75

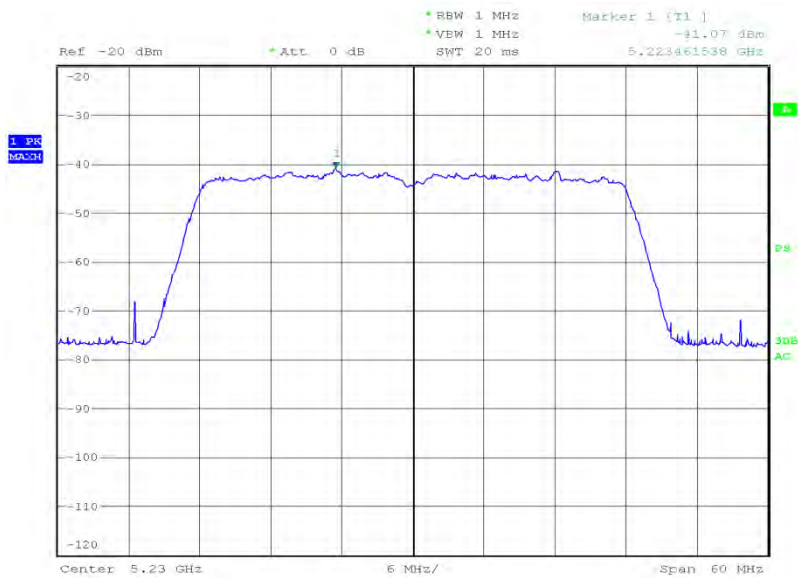

Date: 10.APR.2012 19:45:37




Product Service

Radiated

Frequency Band 2

5270 MHz

EIRP (dBm)	EIRP (mW)
11.44	13.93

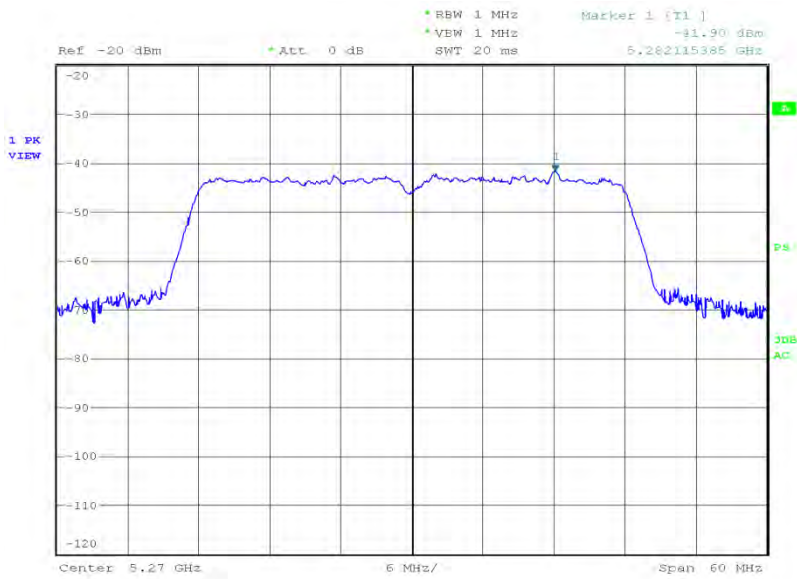


Date: 10.APR.2012 19:57:09



Product Service

5310 MHz

EIRP (dBm)	EIRP (mW)
10.61	11.51

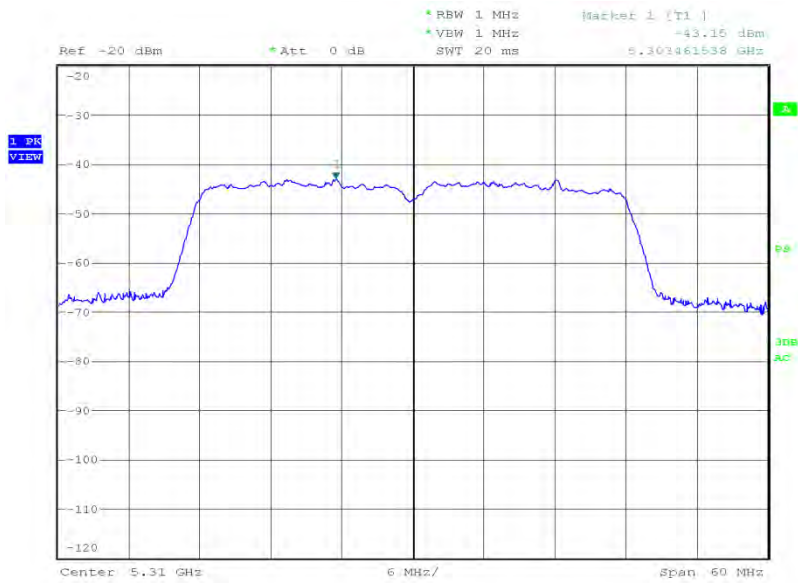

Date: 10.APR.2012 20:06:35




Product Service

Radiated

Frequency Band 3

5510 MHz

EIRP (dBm)	EIRP (mW)
8.76	7.52

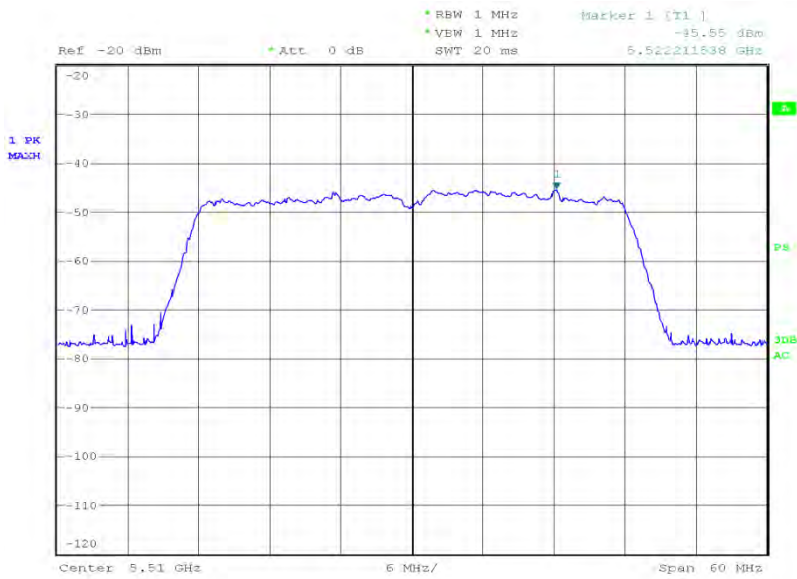


Date: 10.APR.2012 20:25:41



Product Service

5590 MHz

EIRP (dBm)	EIRP (mW)
11.01	12.62

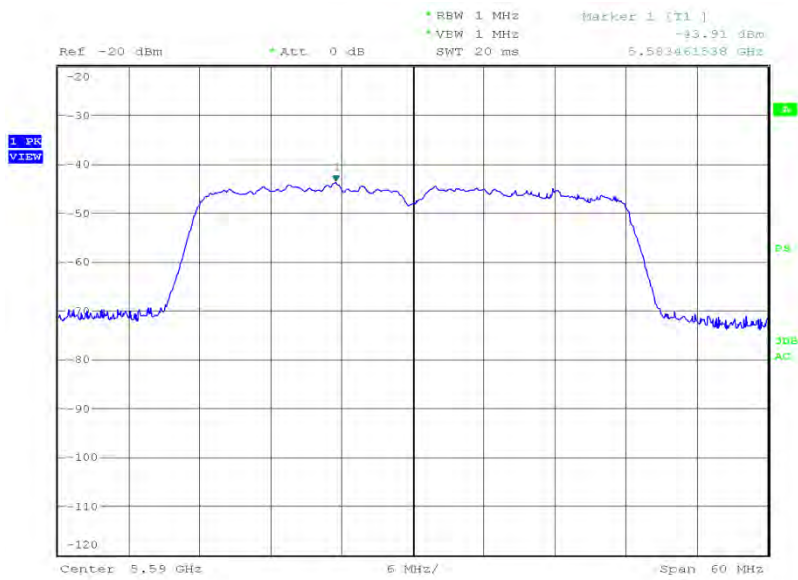

Date: 10.APR.2012 20:36:47



Product Service

5670 MHz

EIRP (dBm)	EIRP (mW)
10.65	11.61



Date: 10.APR.2012 20:41:57




Product Service

Radiated

Frequency Band 4

5755 MHz

EIRP (dBm)	EIRP (mW)
12.03	15.96

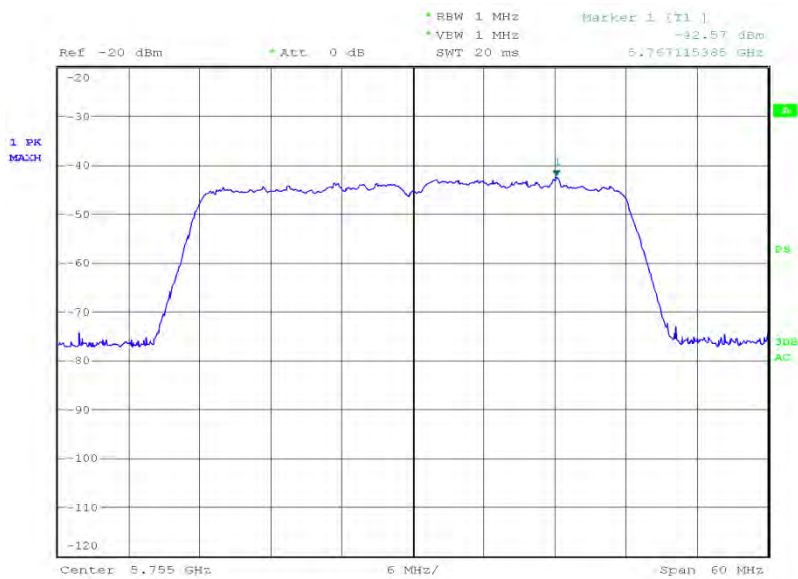


Date: 10.APR.2012 20:46:43



Product Service

5795 MHz

EIRP (dBm)	EIRP (mW)
10.39	10.94

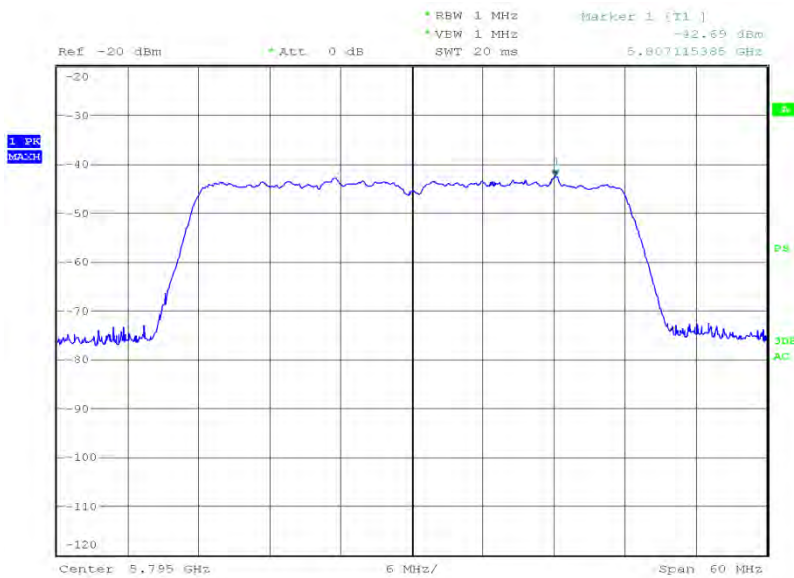

Date: 10.APR.2012 21:02:43

Limit for Radiated

Frequency Band (MHz)	FCC Limit	IC Limit
5150 to 5250	Lesser of 200 mW or 10 dBm + 10 log B	Lesser of 200 mW or 10 dBm + 10 log B
5250 to 5350	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5470 to 5725	Lesser of 1 W or 17 dBm + 10 log B	Lesser of 1 W or 17 dBm + 10 log B
5725 to 5825	Lesser of 4 W or 23 dBm + 10 log B	Lesser of 4 W or 23 dBm + 10 log B

Note: For FCC limit, “B” = 26 dB Bandwidth. For IC limit “B” = 99% Occupied Bandwidth.
For FCC only – It is acceptable to have an antenna with up to 6 dBi gain, without reducing the conducted output power.

For 802.11(n) – 40 MHz Bandwidth, the middle channel was not tested in Frequency Bands 1, 2 and 4. A signal width of 40 MHz means a measurement on the bottom and top channels will satisfy the requirements in these frequency bands.



2.3 UNDESIRABLE EMISSION LIMITS

2.3.1 Specification Reference

FCC CFR 47 Part 15, Clause 15.407 (b)(1)(2)(3)(4)(6)(7)
Industry Canada RSS-210, Clause A9.2 (1)(2)(3)(4)

2.3.2 Equipment Under Test and Modification State

Venice 6.5 S/N: RAD103037 on Test Jig S/N: RAD103234 - Modification State 0
Venice 6.5 S/N: RAD 103021 on Test Jig, S/N RAD103235 - Modification State 0

2.3.3 Date of Test

7 March 2012, 12 March 2012, 13 March 2012, 14 March 2012, 18 March 2012, 26 March 2012, 27 March 2012, 2 April 2012, 3 April 2012, 4 April 2012 & 30 April 2012

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

For conducted emissions, the EUT was set to operate at maximum power on the worst case data rate. The test was performed on the bottom, middle and top channels. The test was performed from 9 kHz to 40 GHz.

The measurement path loss in each relevant frequency band was measured and entered as a reference level offset.

For radiated emissions, the test method described above was also used. However, the measurement was performed from 30 MHz to 40 GHz and the path loss is incorporated as a transducer factor and entered into the spectrum analyser. In each frequency span the level was maximised by rotating the EUT 360° and a height search of the measuring antenna.

The band edge measurements were performed in accordance with ANSI C63.10, Clause 6.9.3. The results were analysed to ensure compliance with restricted bands. The EUT was set to the lowest and highest operating frequencies.

2.3.6 Environmental Conditions

Ambient Temperature	16.7 - 24.2°C
Relative Humidity	29.0 - 43.0%



2.3.7 Test Results

802.11(a) – Onboard PIFA Antenna

4V, 3.3V, 1.2V DC Supply


Spurious Conducted Emissions

54Mbps

Frequency Band 1

5180 MHz


9 kHz to 7 GHz

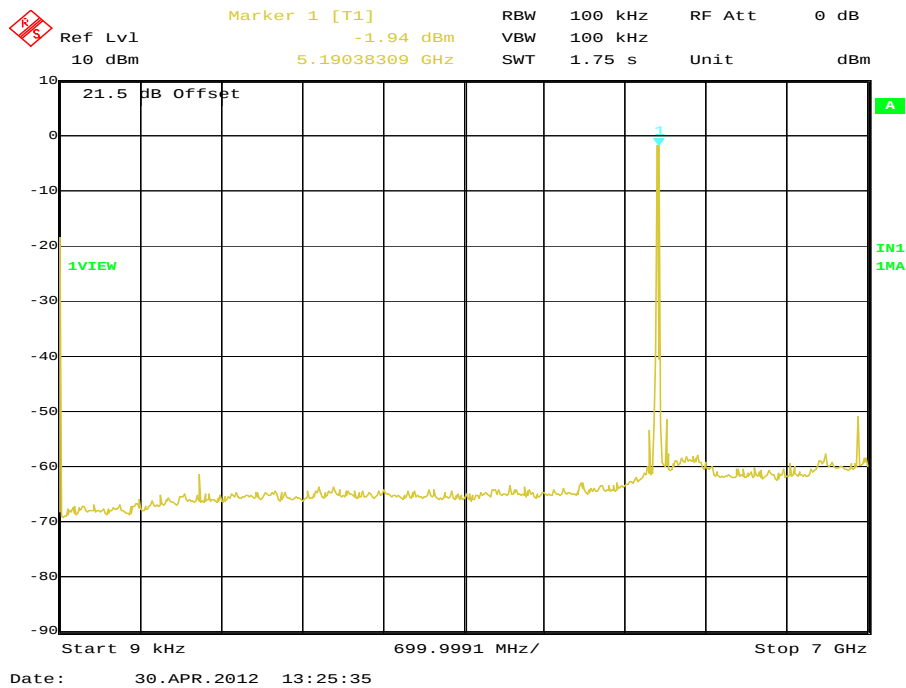




Product Service

7 GHz to 12 GHz

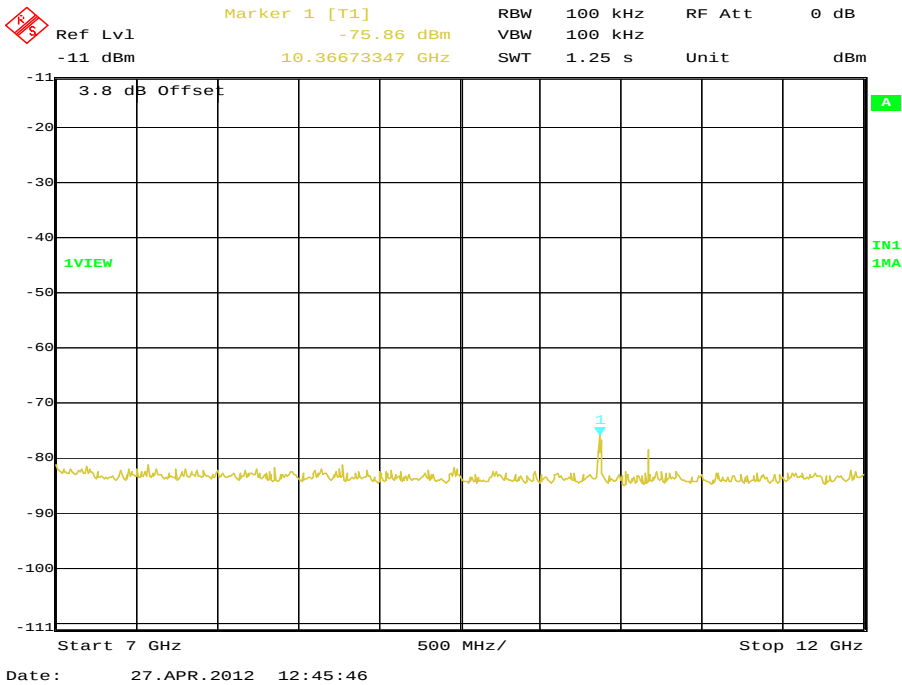


12 GHz to 18 GHz

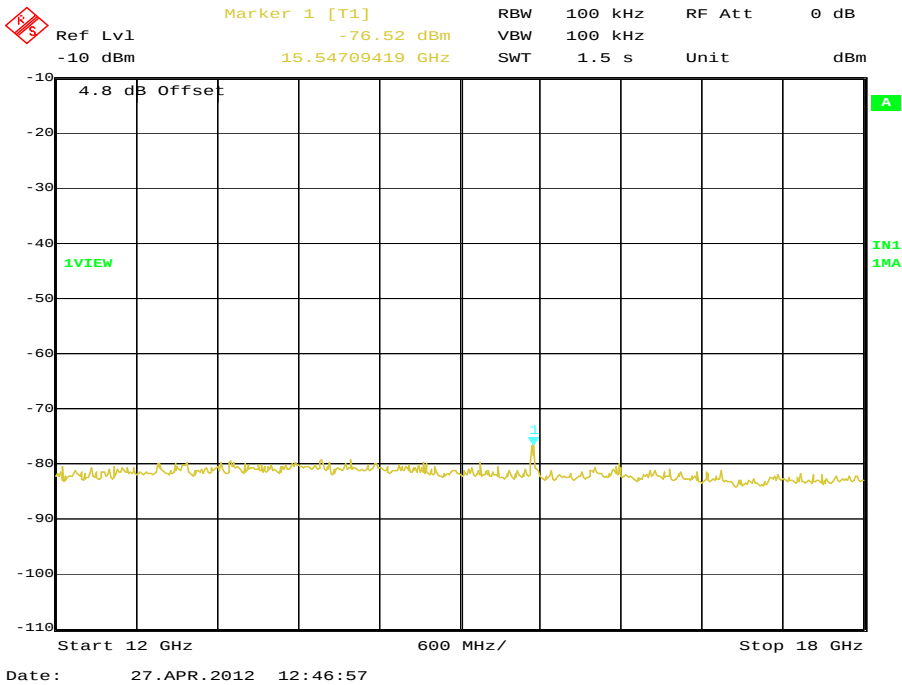




18 GHz to 25 GHz

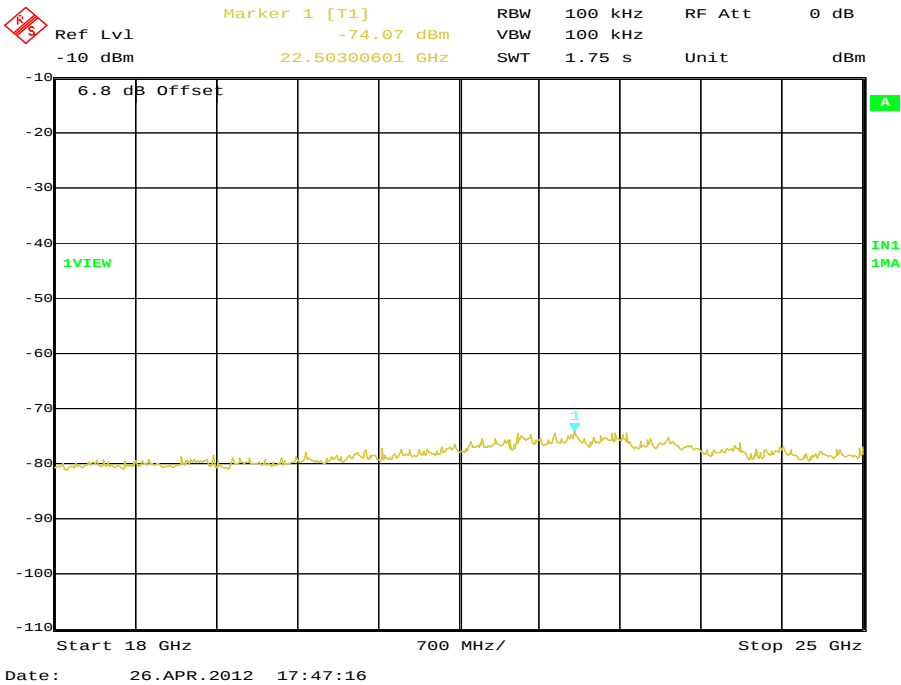

25 GHz to 40 GHz

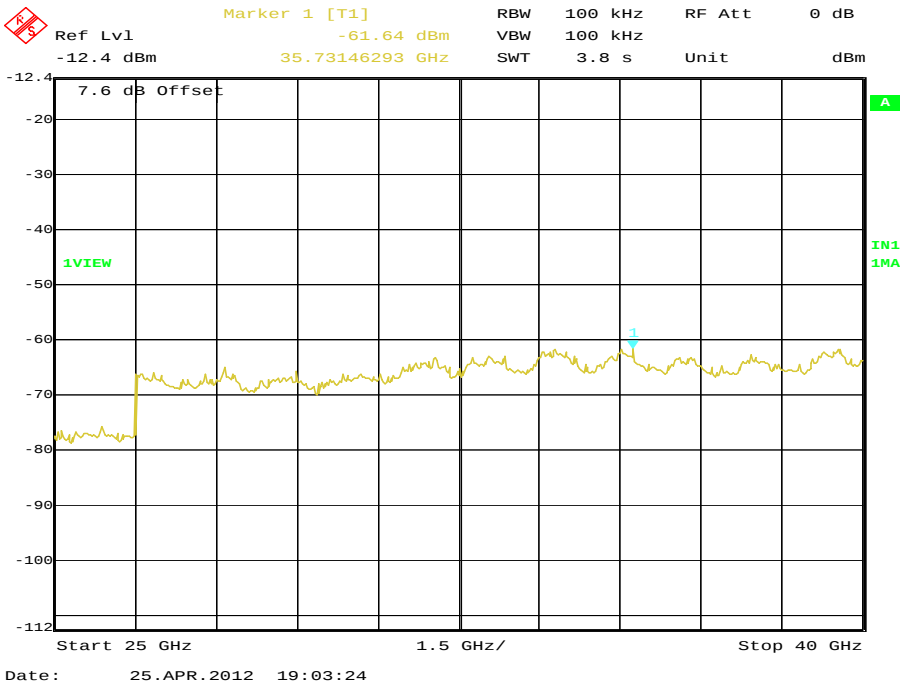





Product Service

5220 MHz

9 kHz to 7 GHz

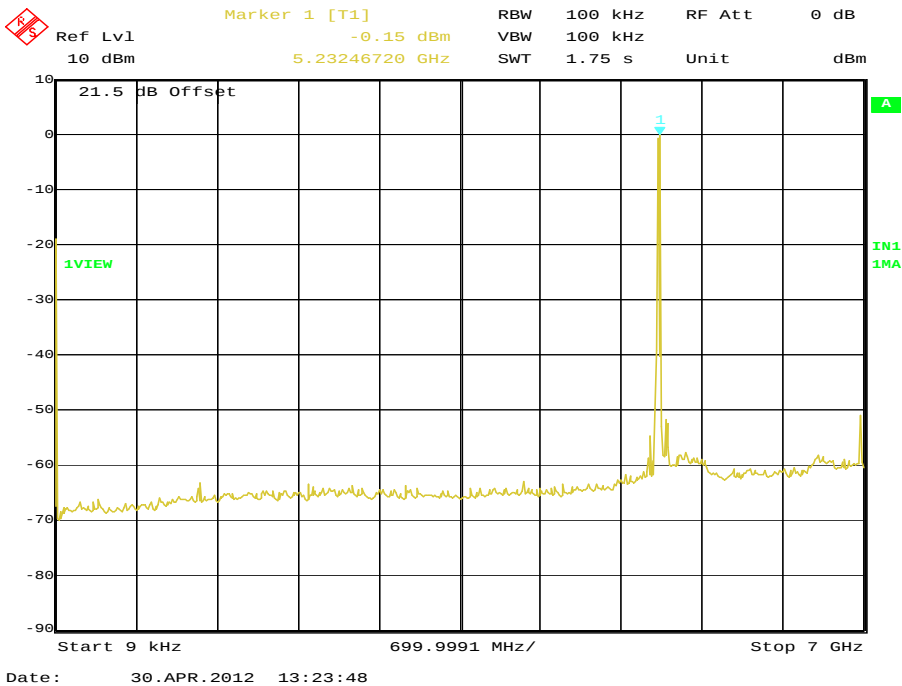


7 GHz to 12 GHz

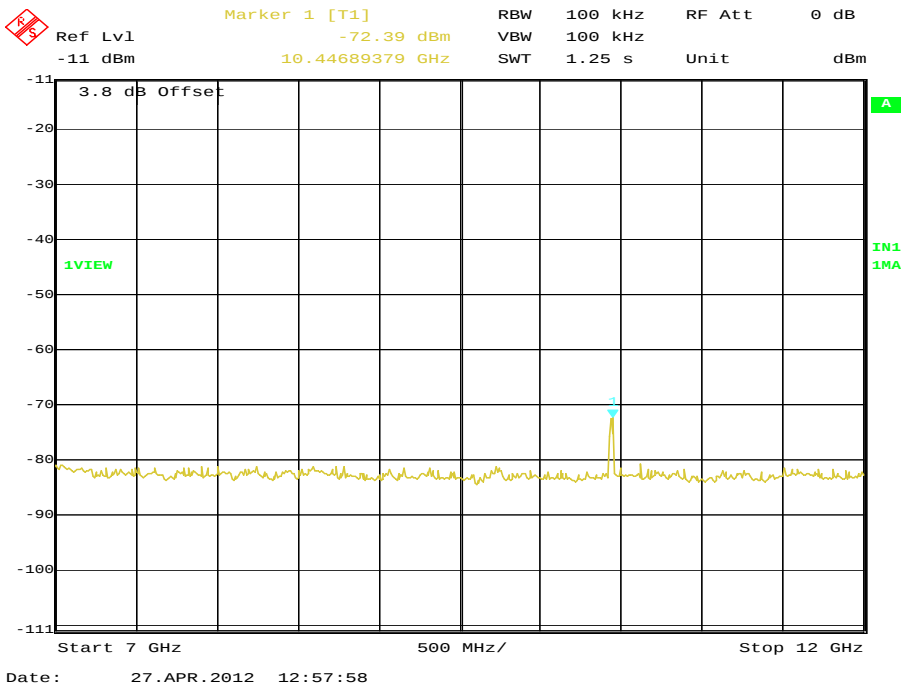




Product Service

12 GHz to 18 GHz

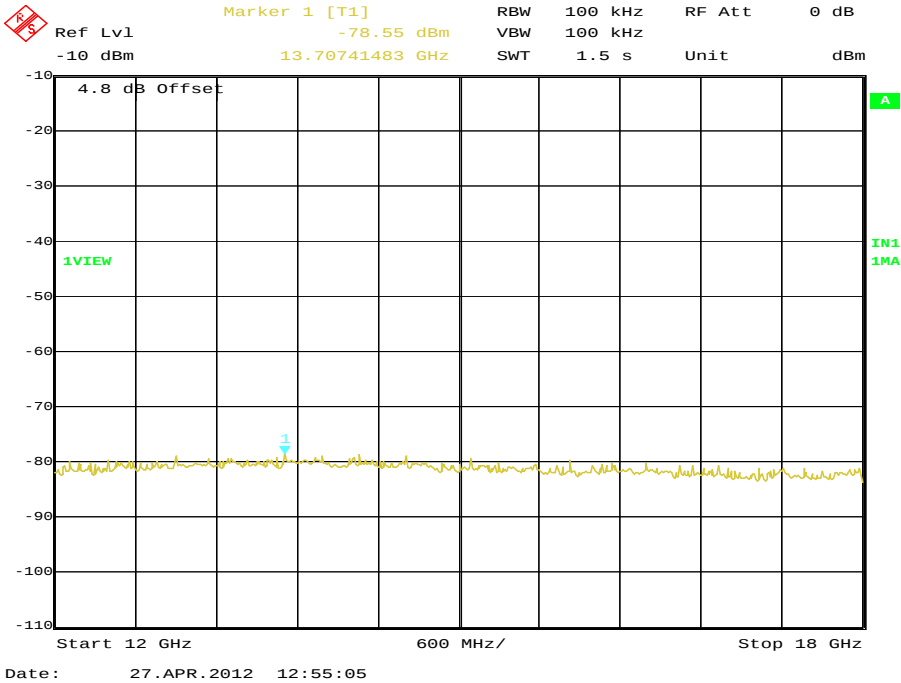


18 GHz to 25 GHz

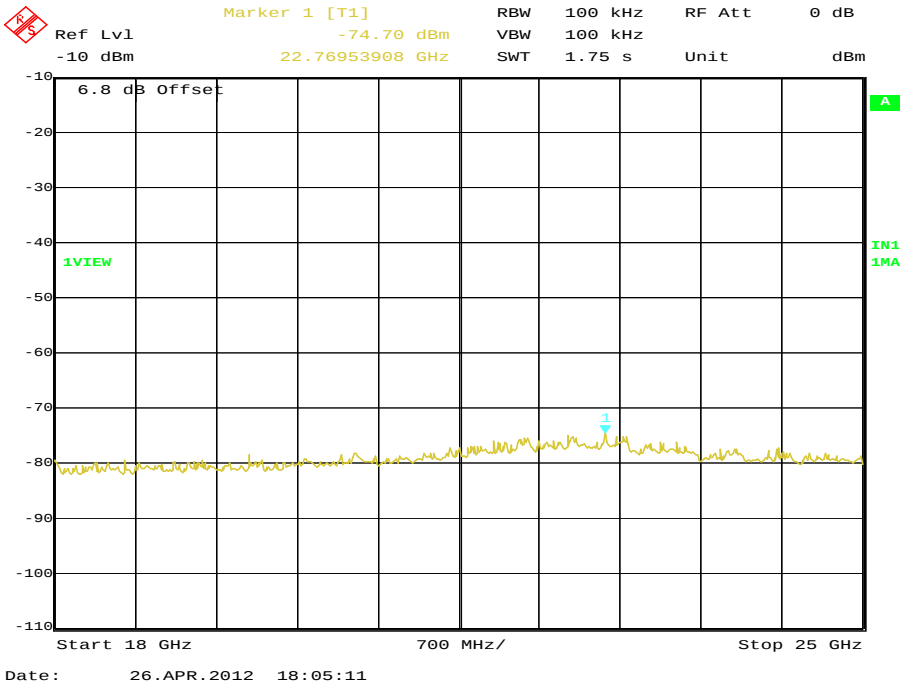




Product Service

25 GHz to 40 GHz

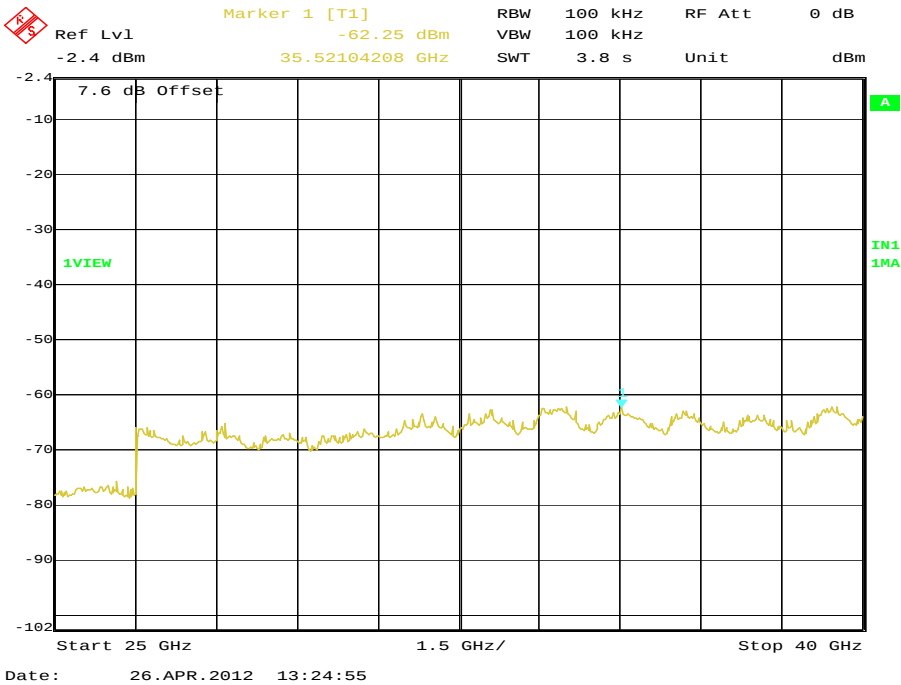

5240 MHz


9 kHz to 7 GHz

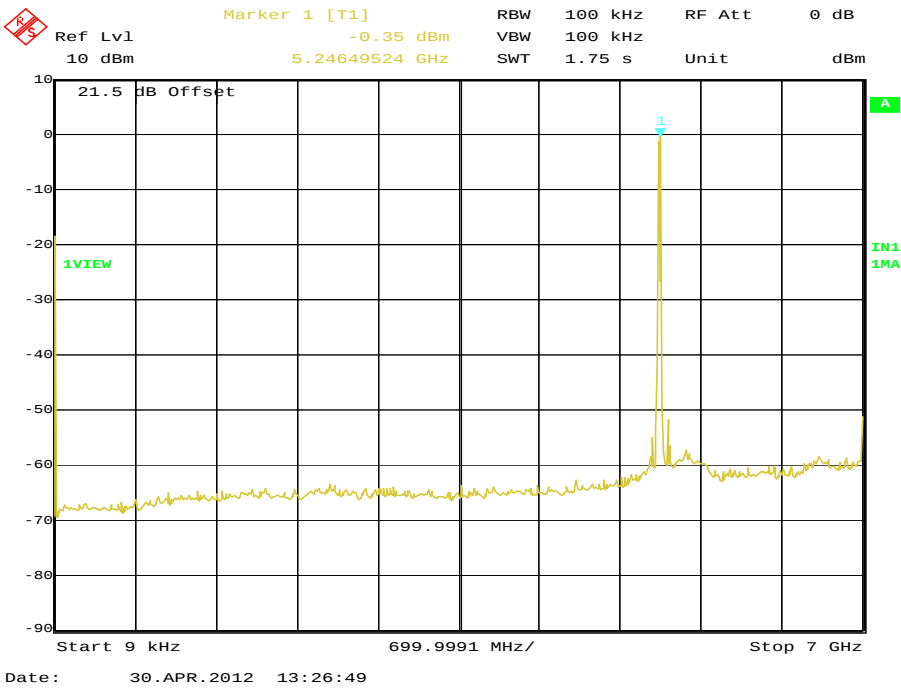




Product Service

7 GHz to 12 GHz

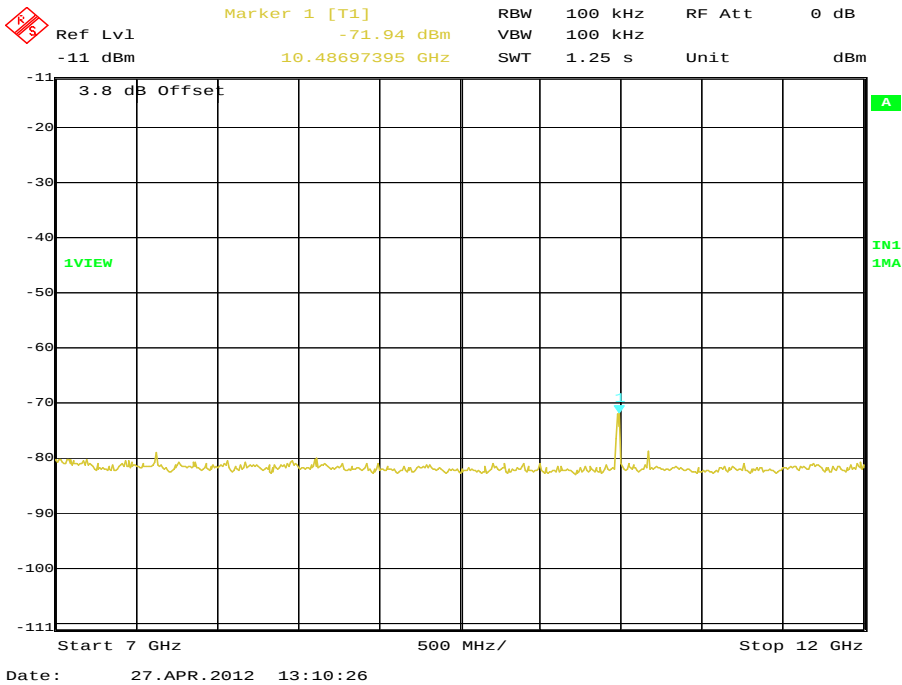


12 GHz to 18 GHz

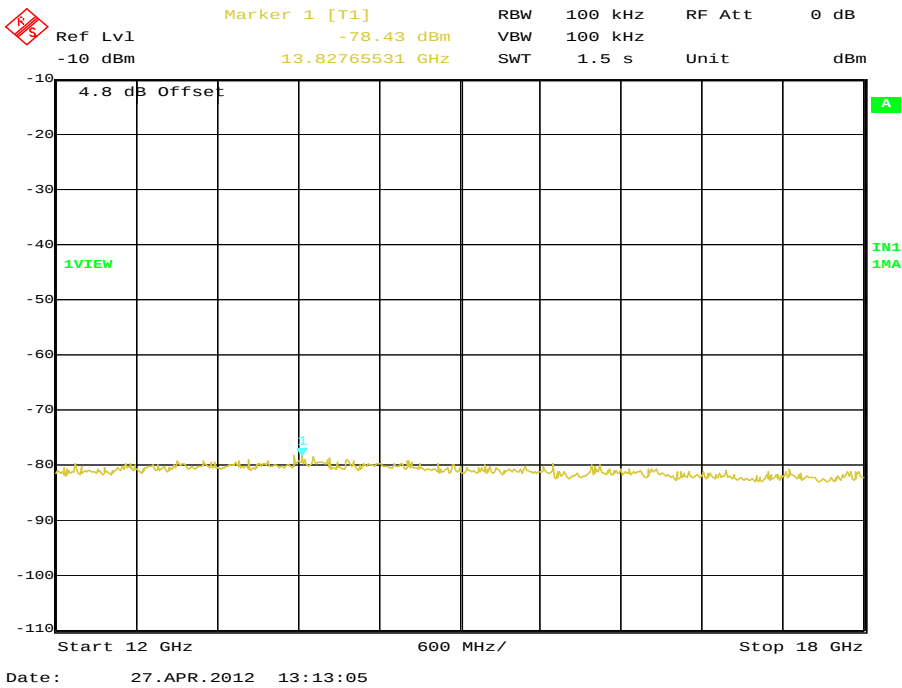




Product Service

18 GHz to 25 GHz

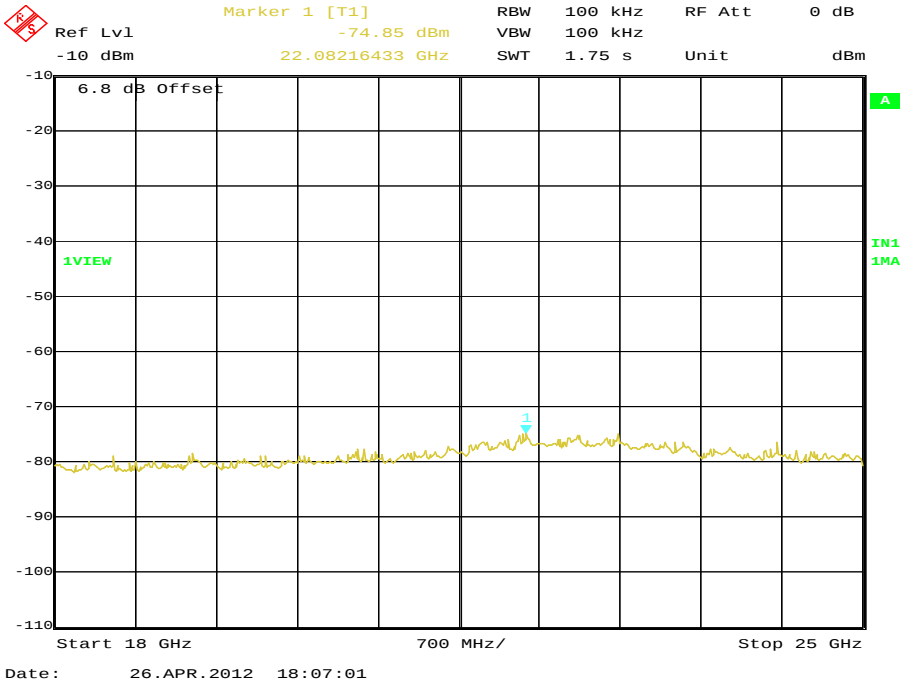

25 GHz to 40 GHz

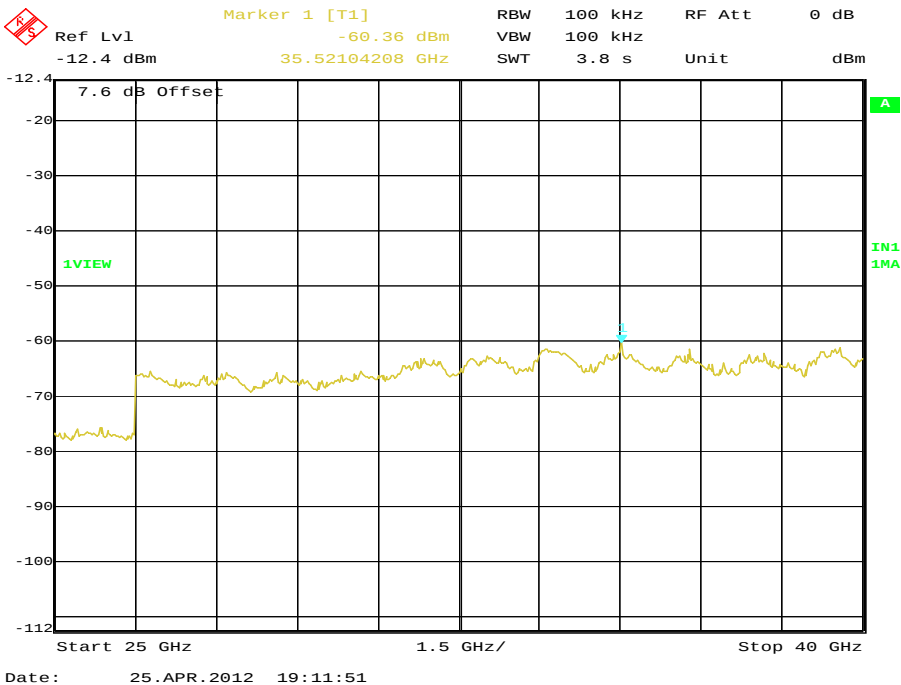




Product Service


Frequency Band 2

5260 MHz

9 kHz to 7 GHz

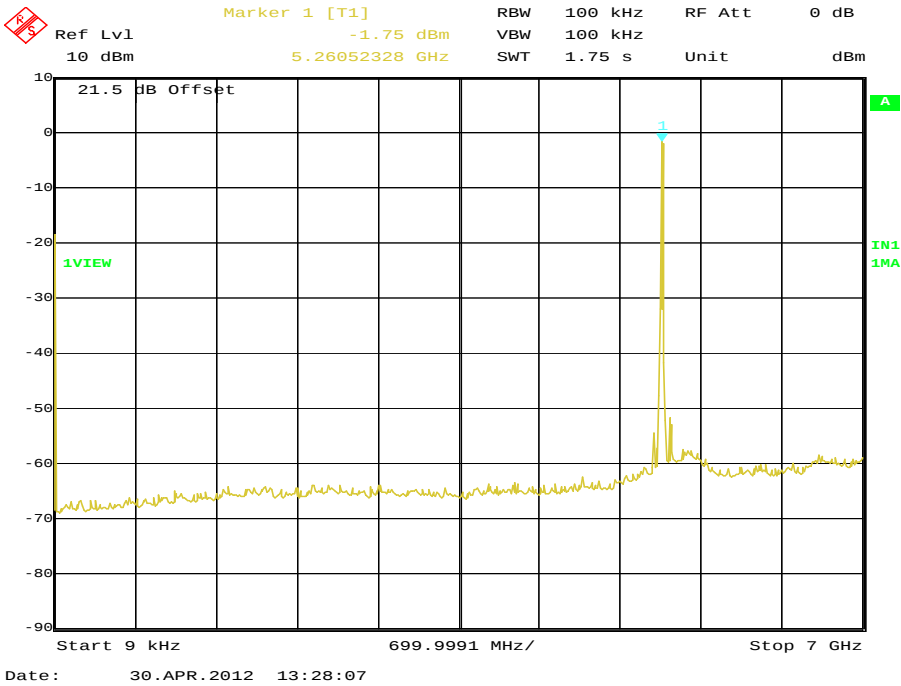


7 GHz to 12 GHz

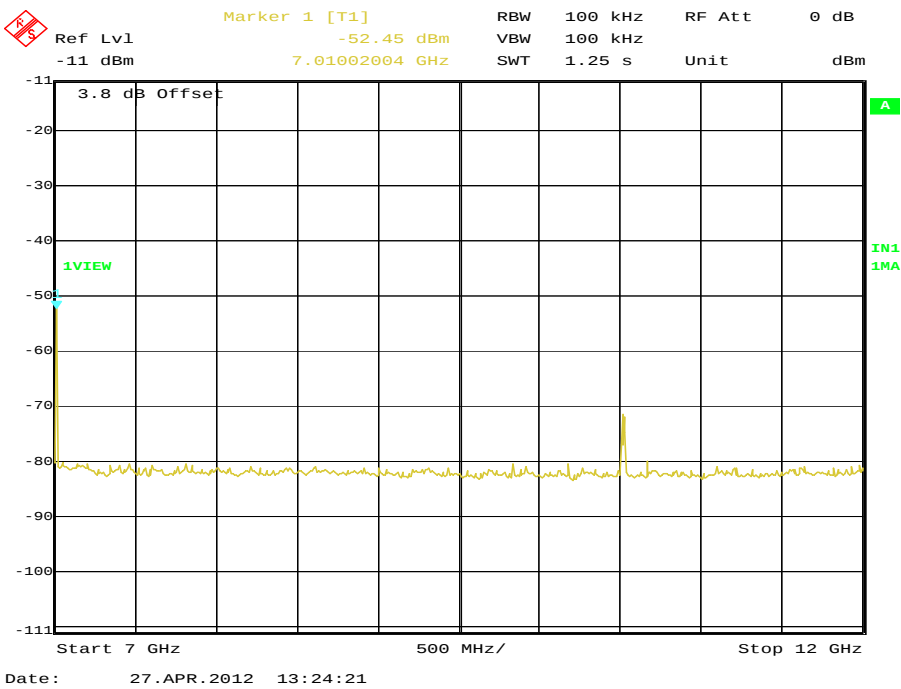




Product Service

12 GHz to 18 GHz

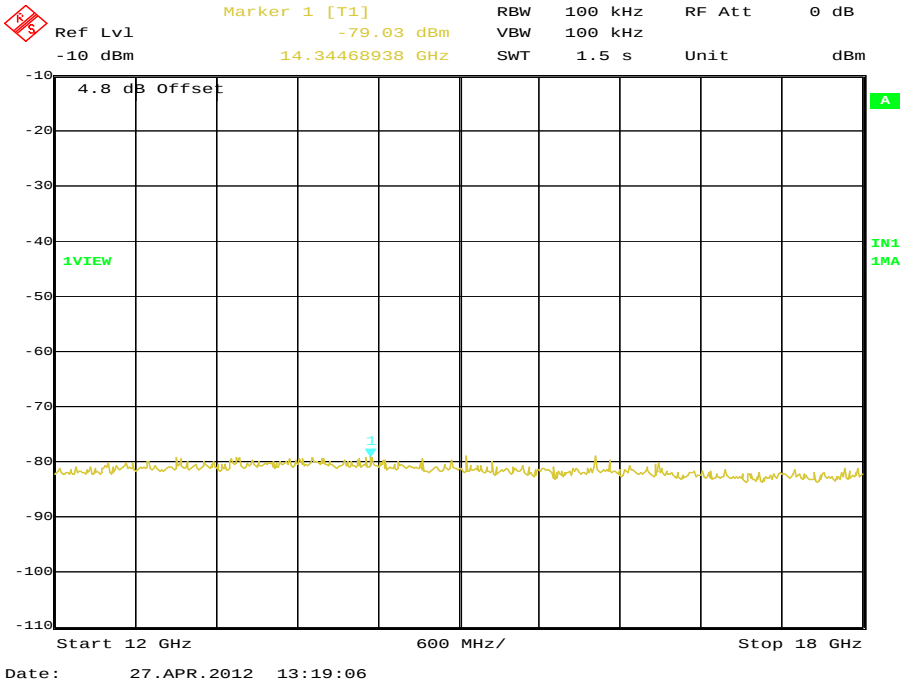


18 GHz to 25 GHz

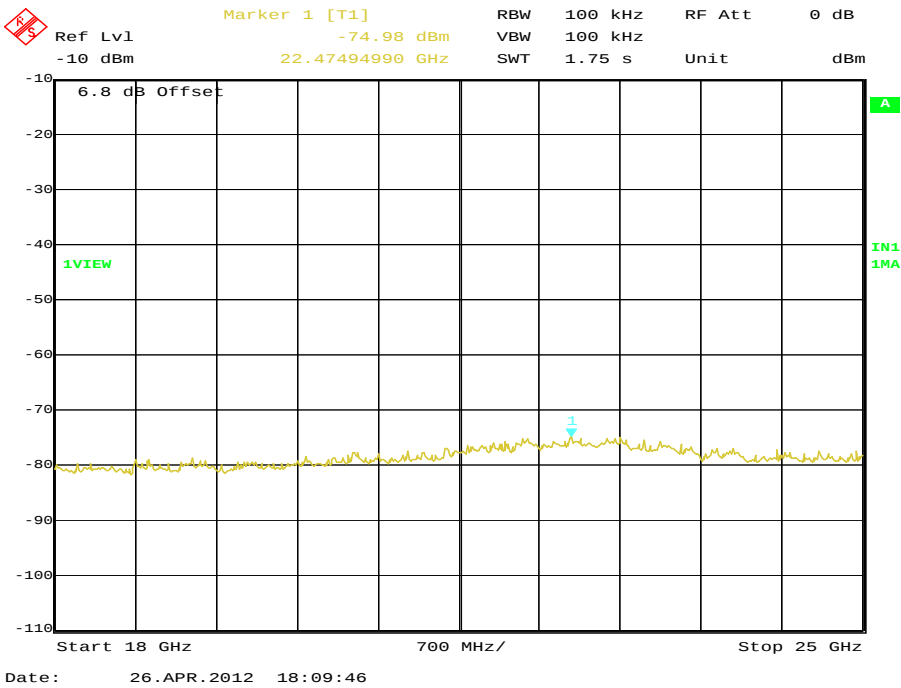




25 GHz to 40 GHz

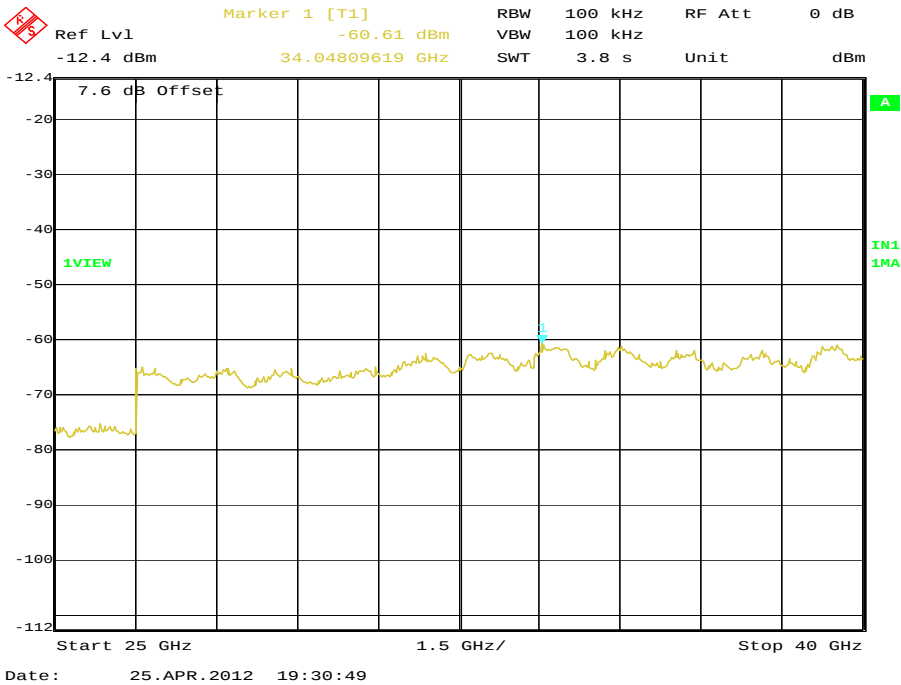

5300 MHz


9 kHz to 7 GHz

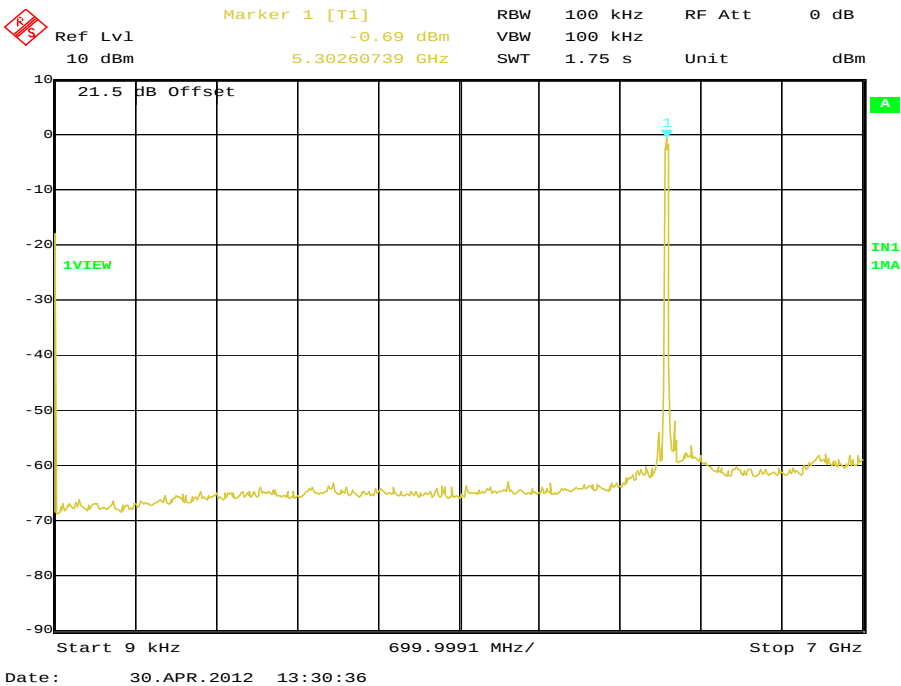




Product Service

7 GHz to 12 GHz

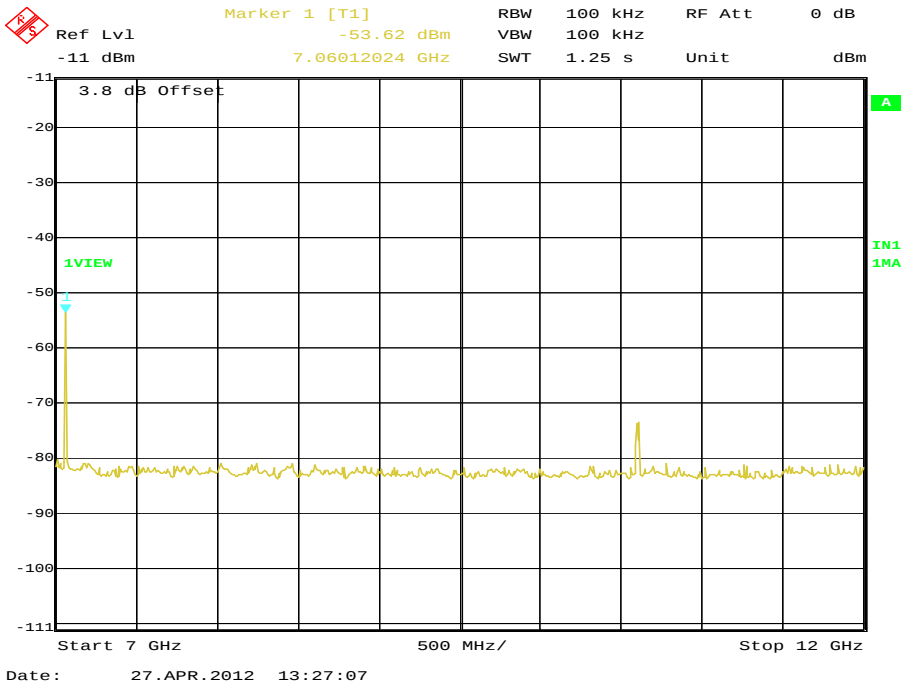


12 GHz to 18 GHz

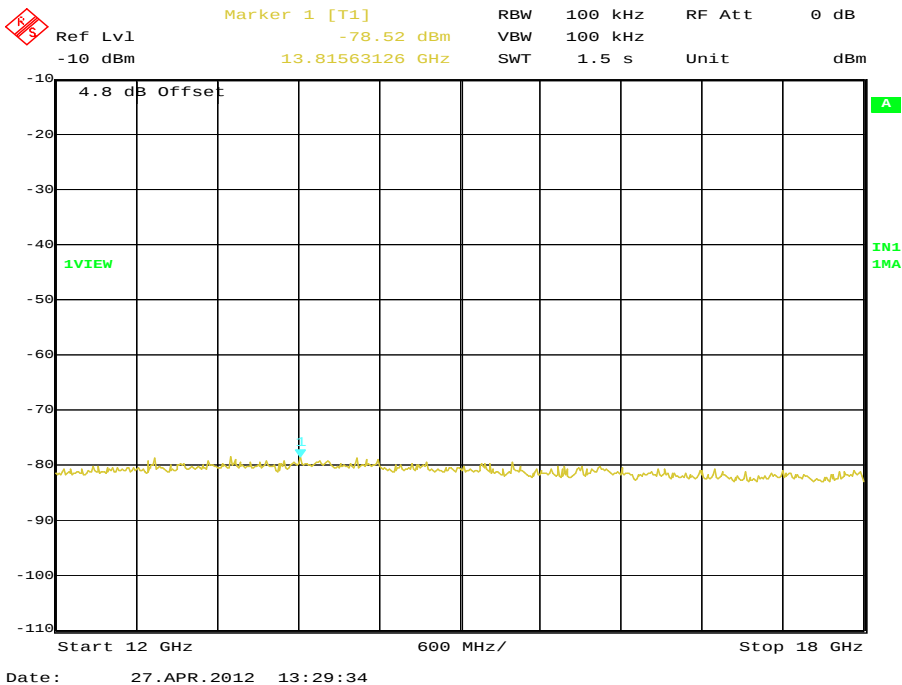




Product Service

18 GHz to 25 GHz

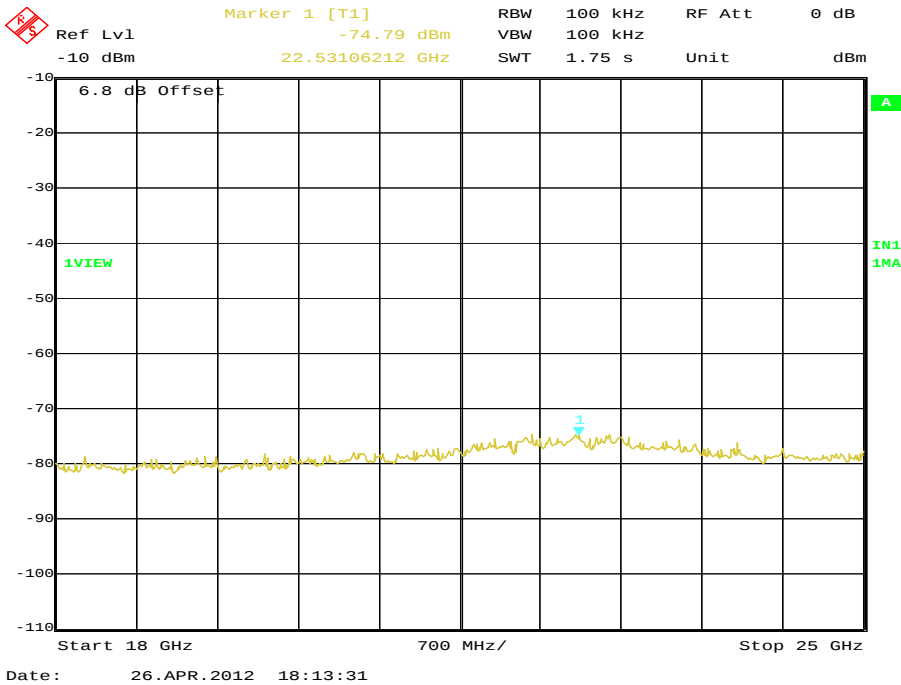

25 GHz to 40 GHz

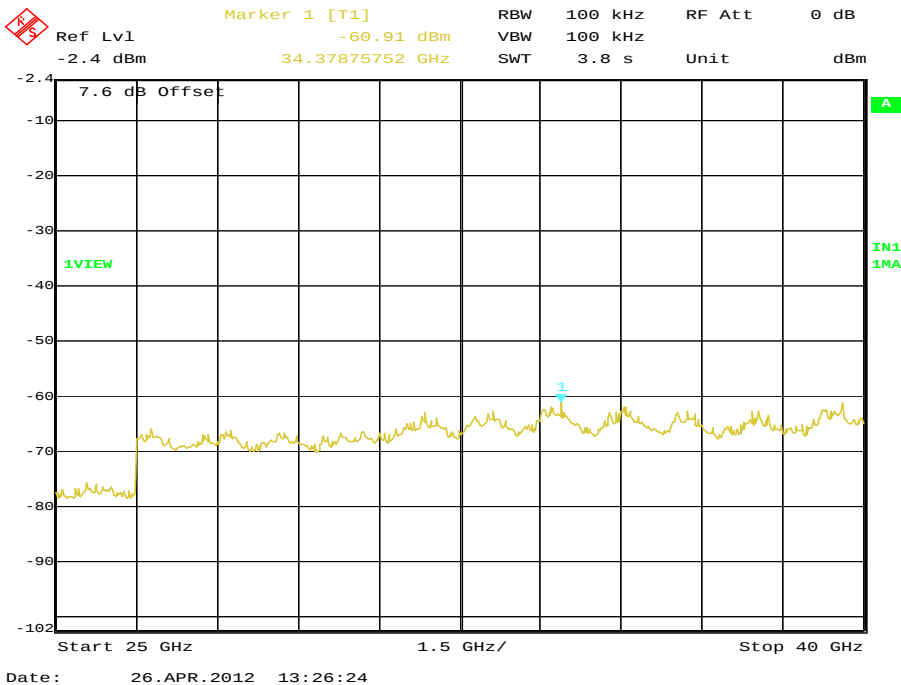





Product Service

5320 MHz

9 kHz to 7 GHz

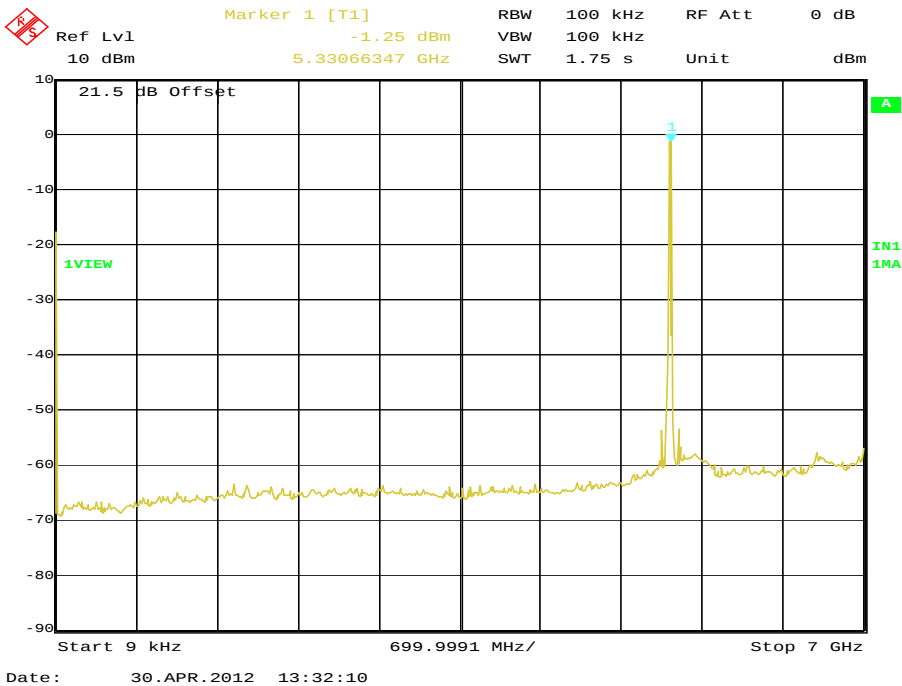


7 GHz to 12 GHz

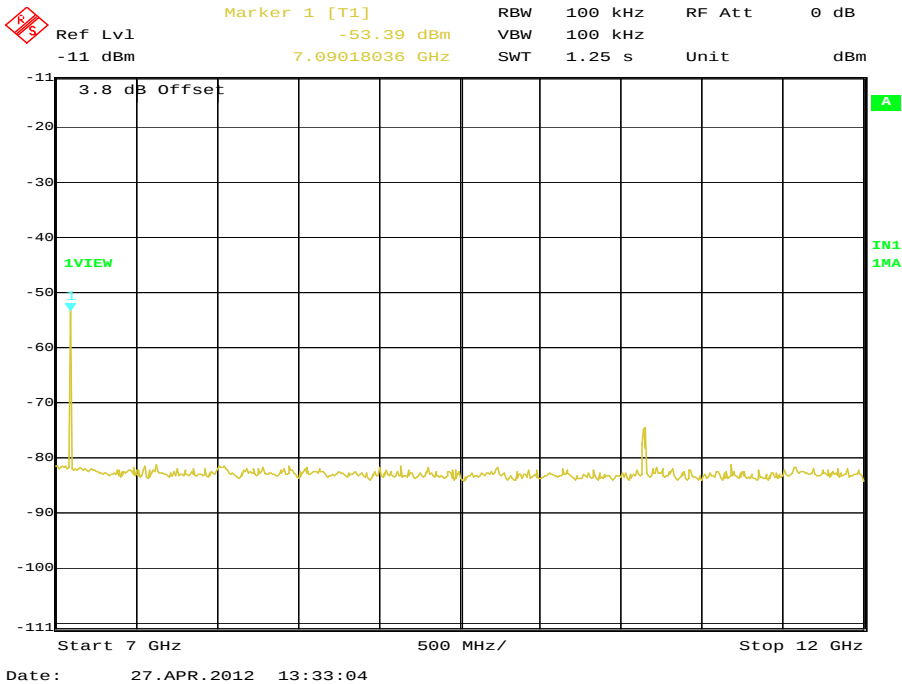




Product Service

12 GHz to 18 GHz

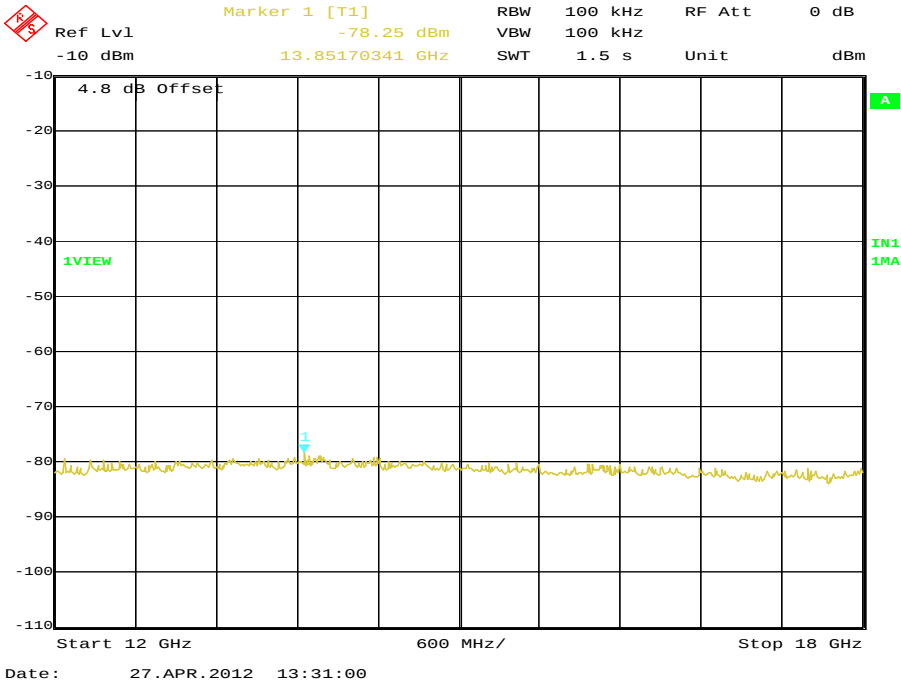


18 GHz to 25 GHz

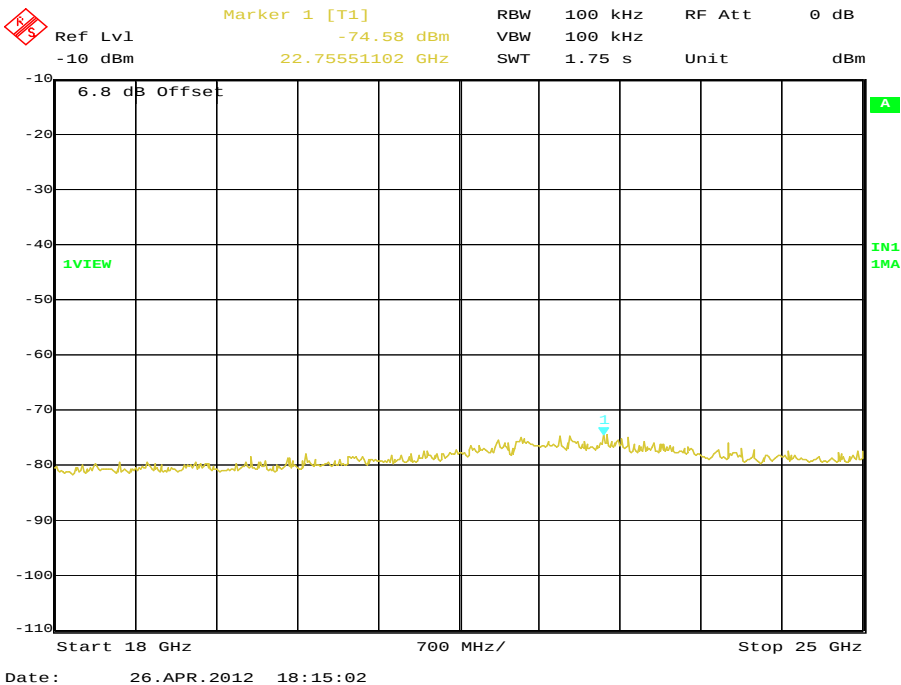



Product Service


25 GHz to 40 GHz

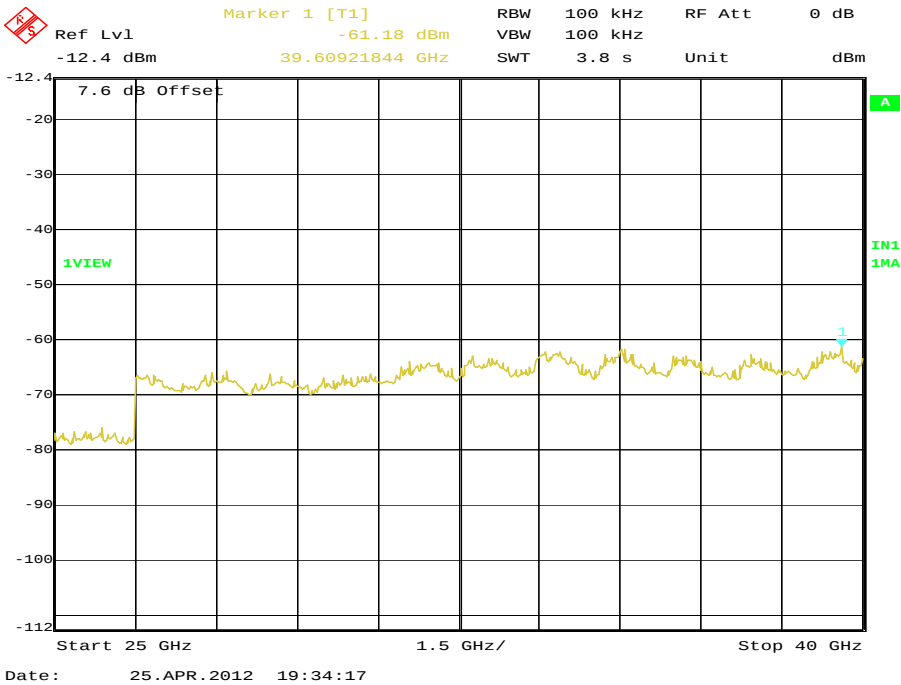

Frequency Band 3

5500 MHz


9 kHz to 7 GHz

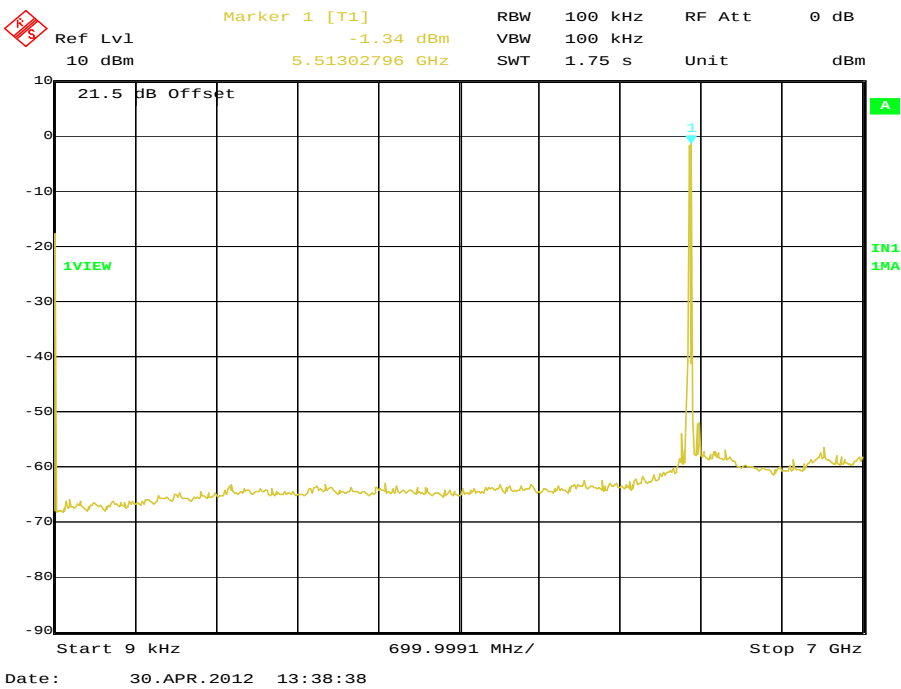




Product Service

7 GHz to 12 GHz

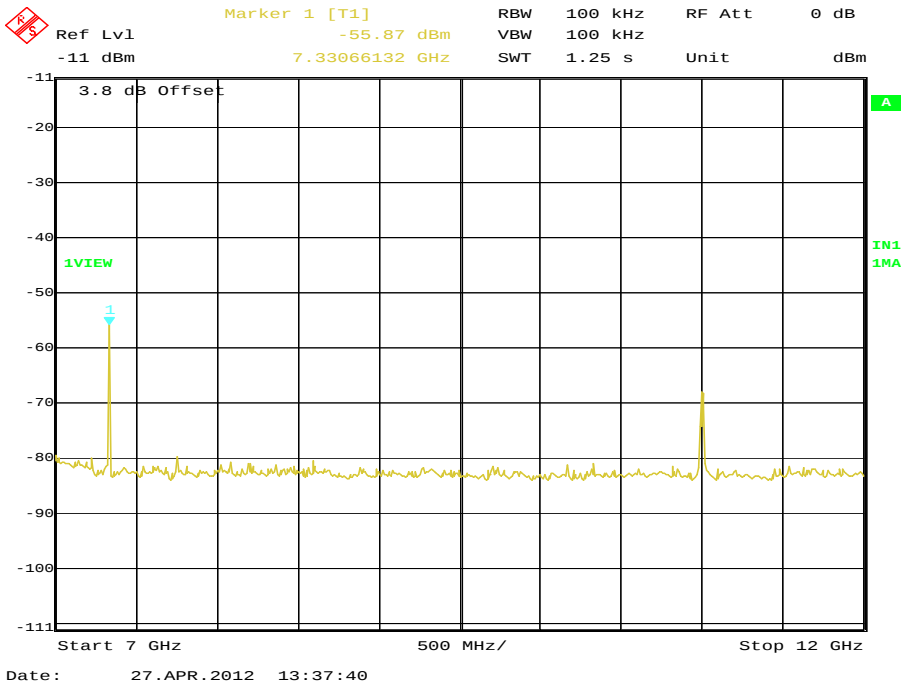


12 GHz to 18 GHz

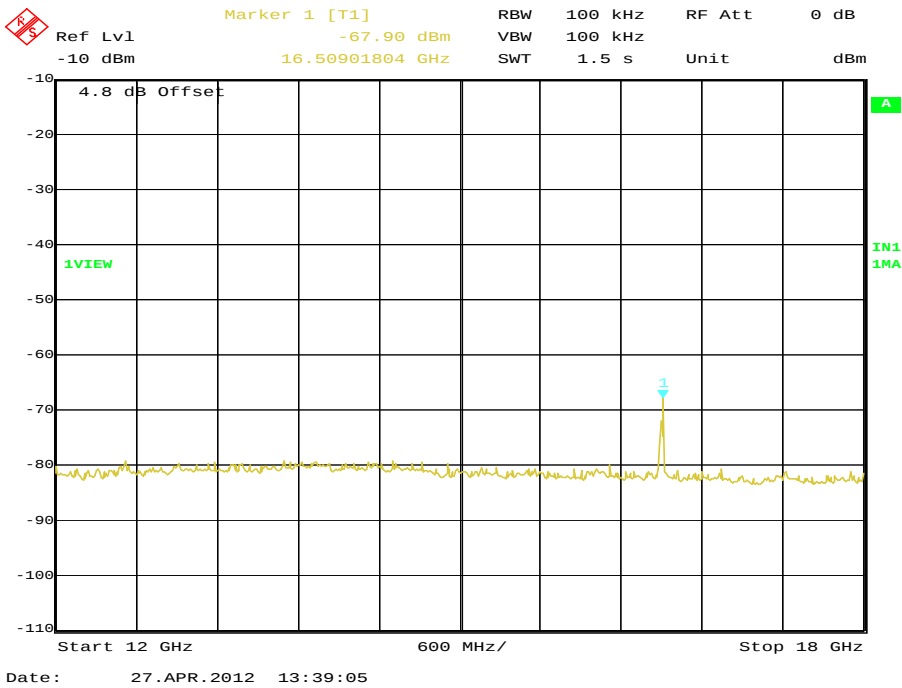




18 GHz to 25 GHz

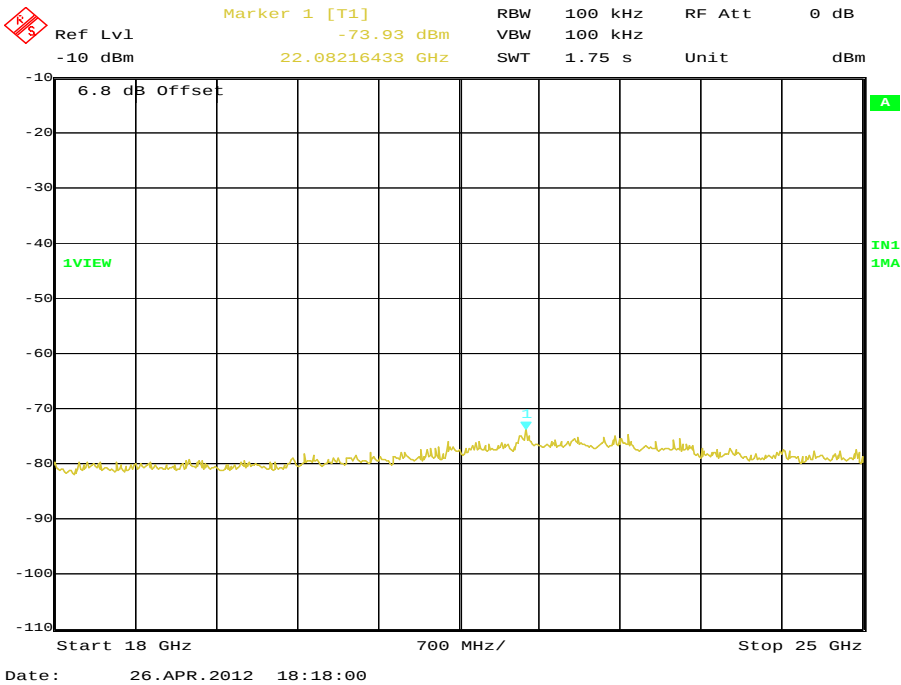

25 GHz to 40 GHz

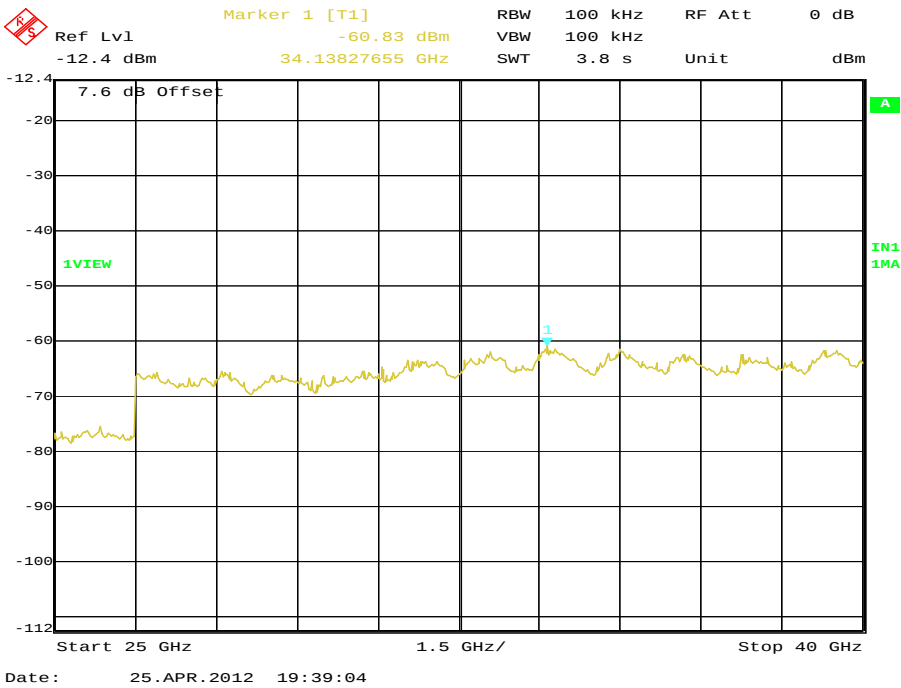





Product Service

5600 MHz

9 kHz to 7 GHz

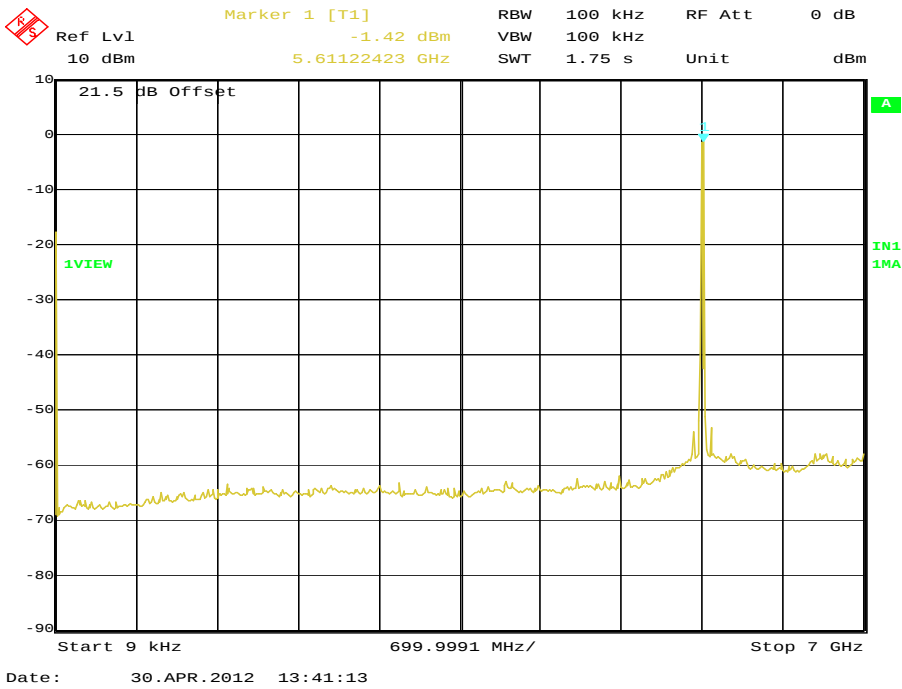


7 GHz to 12 GHz

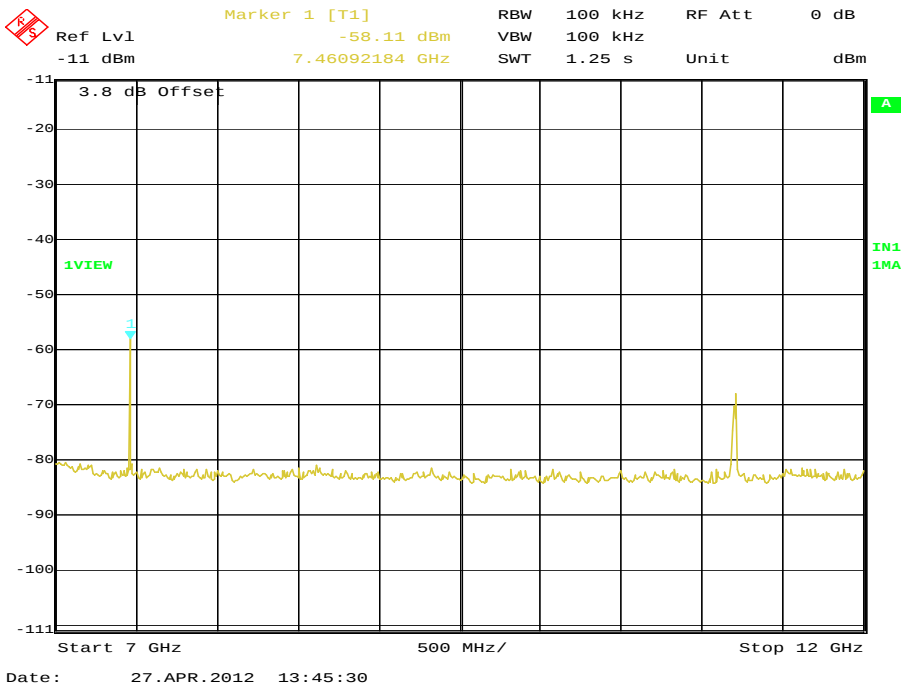




Product Service

12 GHz to 18 GHz

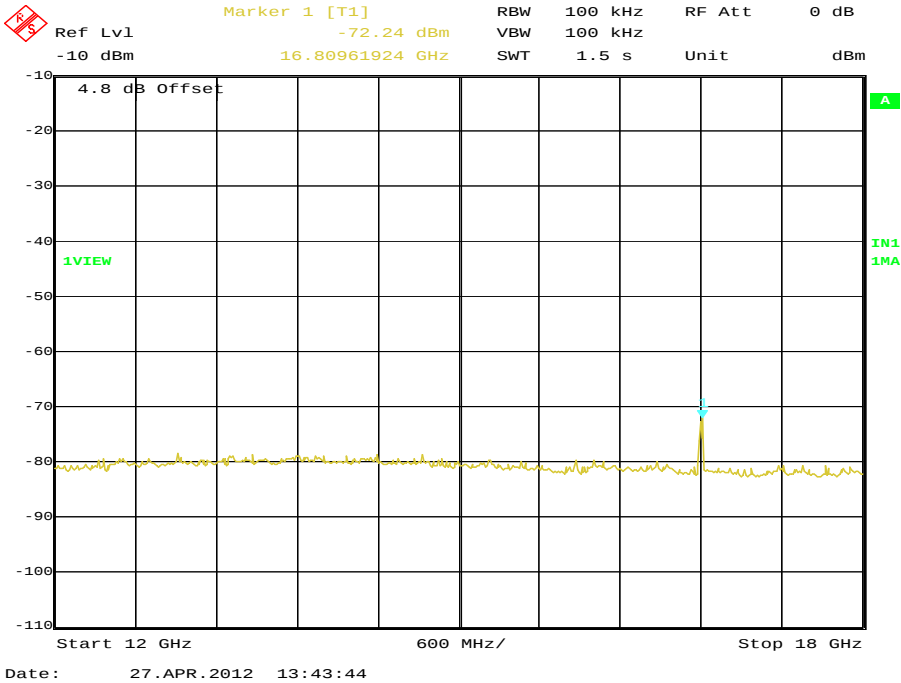


18 GHz to 25 GHz

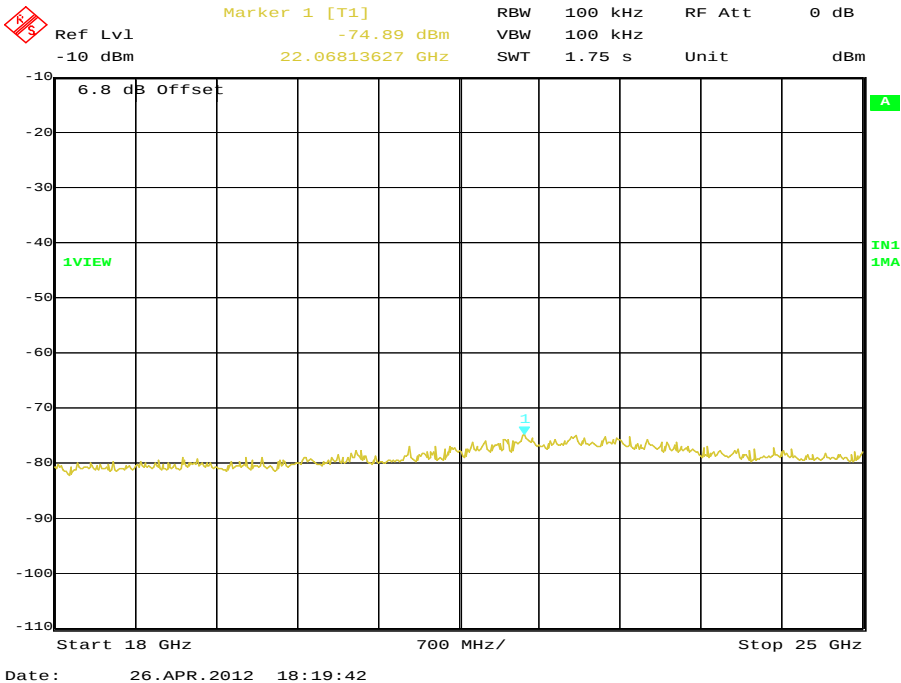




Product Service

25 GHz to 40 GHz

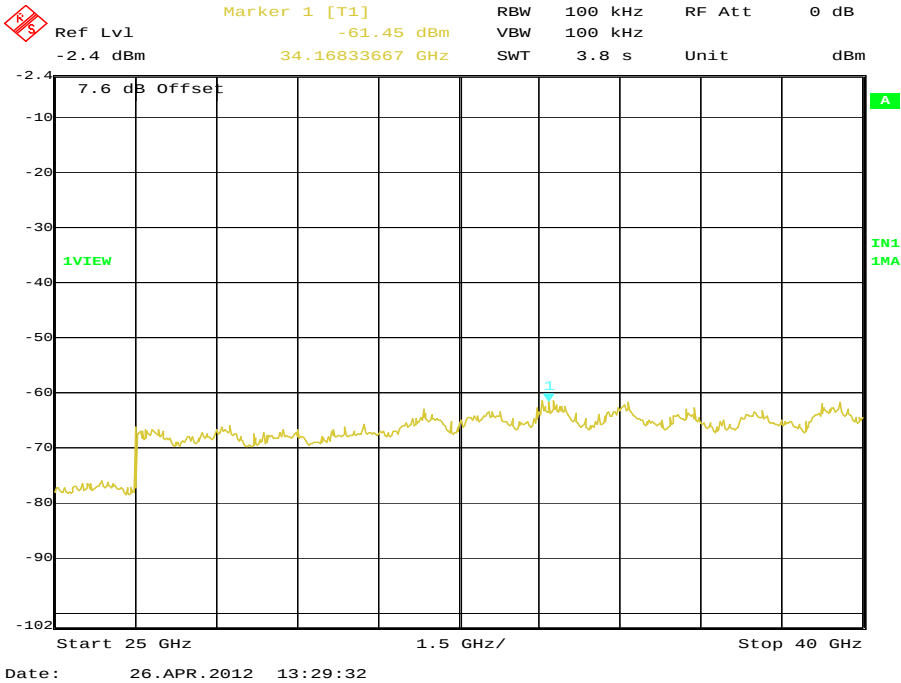

5700 MHz


9 kHz to 7 GHz

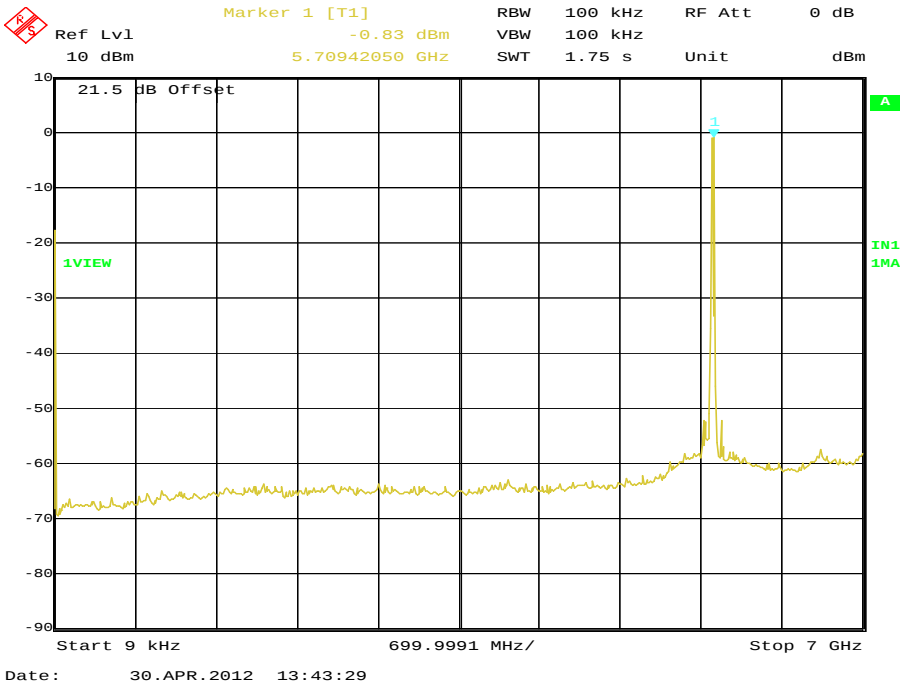




Product Service

7 GHz to 12 GHz

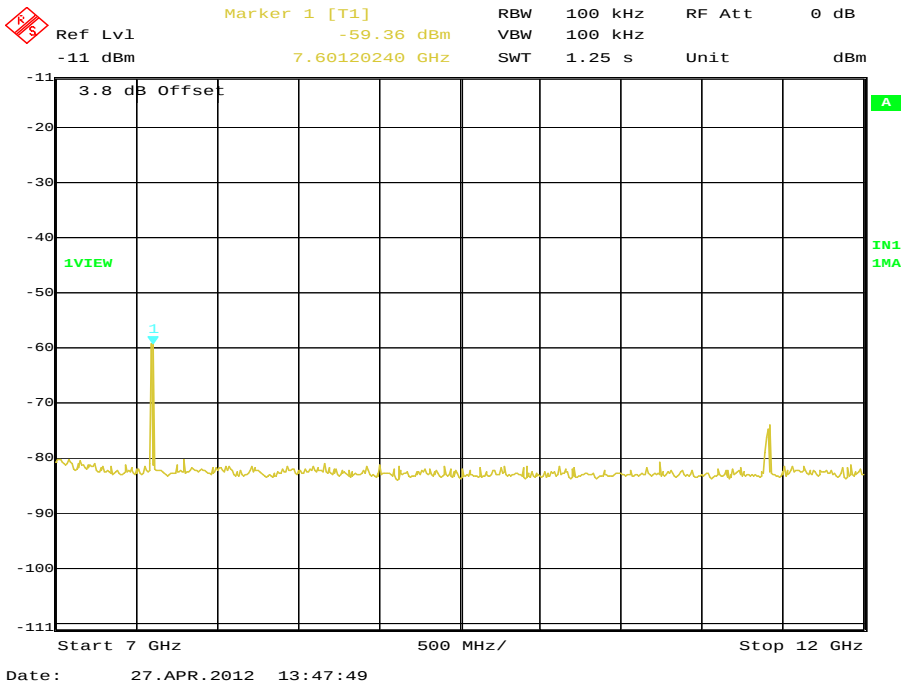



12 GHz to 18 GHz

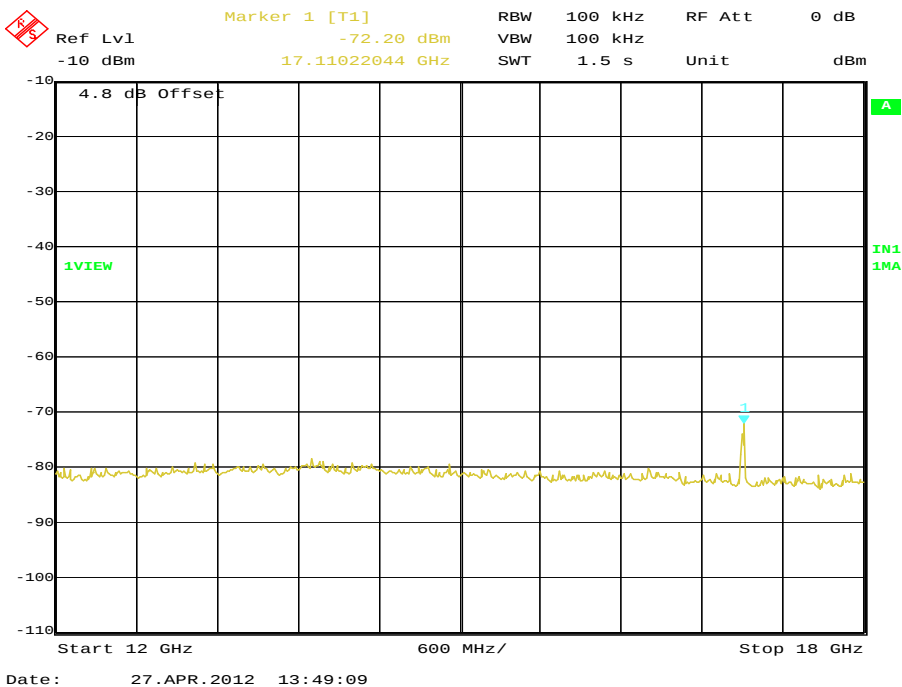



Product Service

18 GHz to 25 GHz

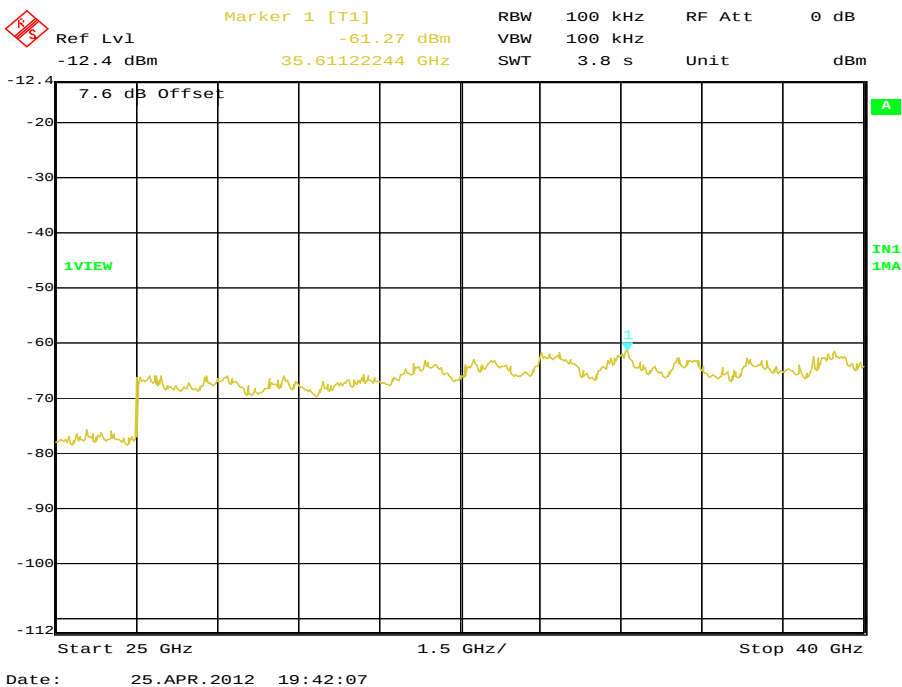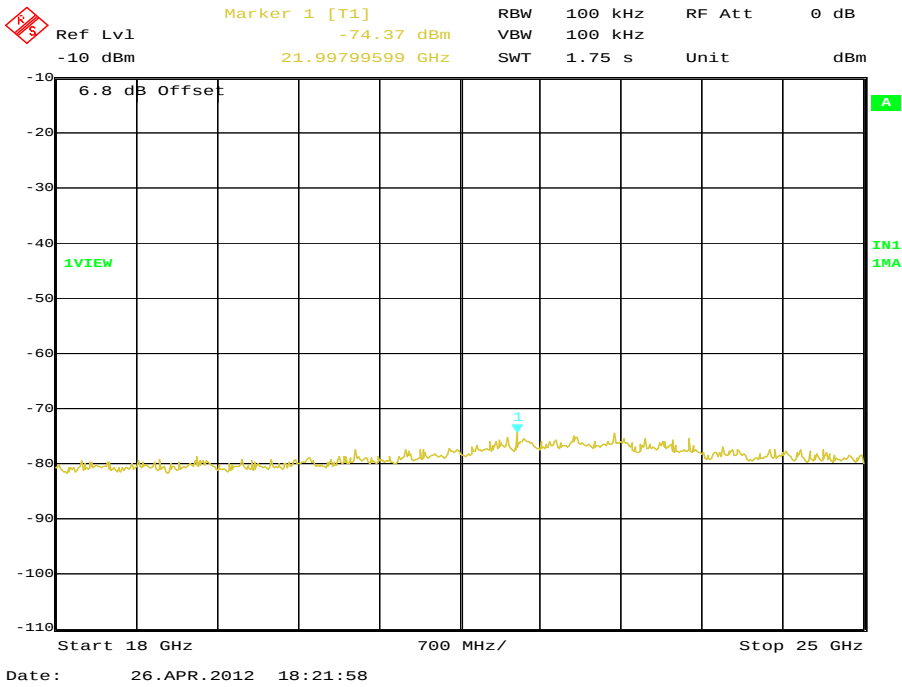




Product Service


Frequency Band 4

5745 MHz

9 kHz to 7 GHz

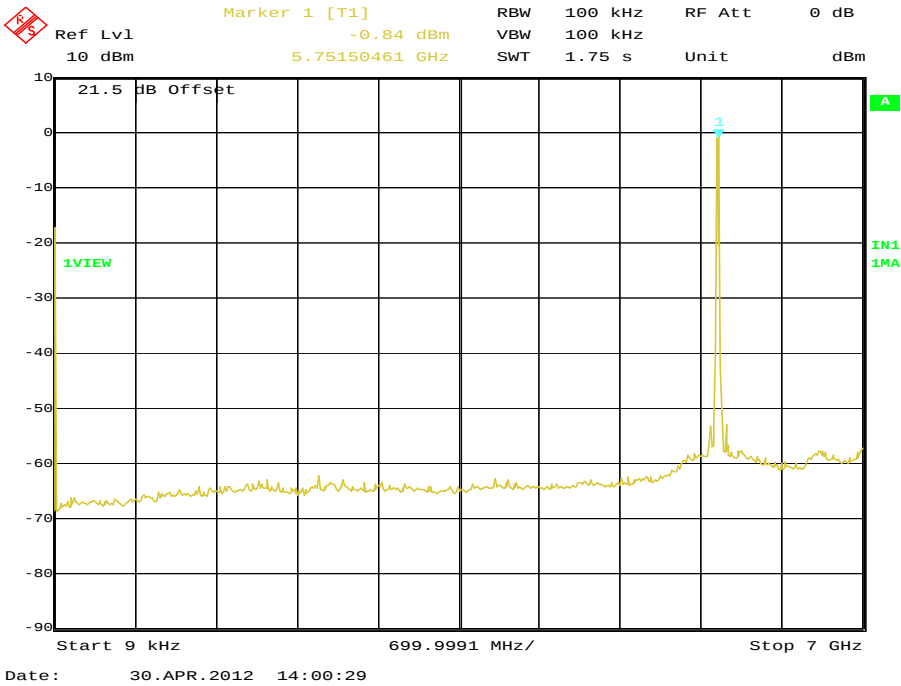


7 GHz to 12 GHz

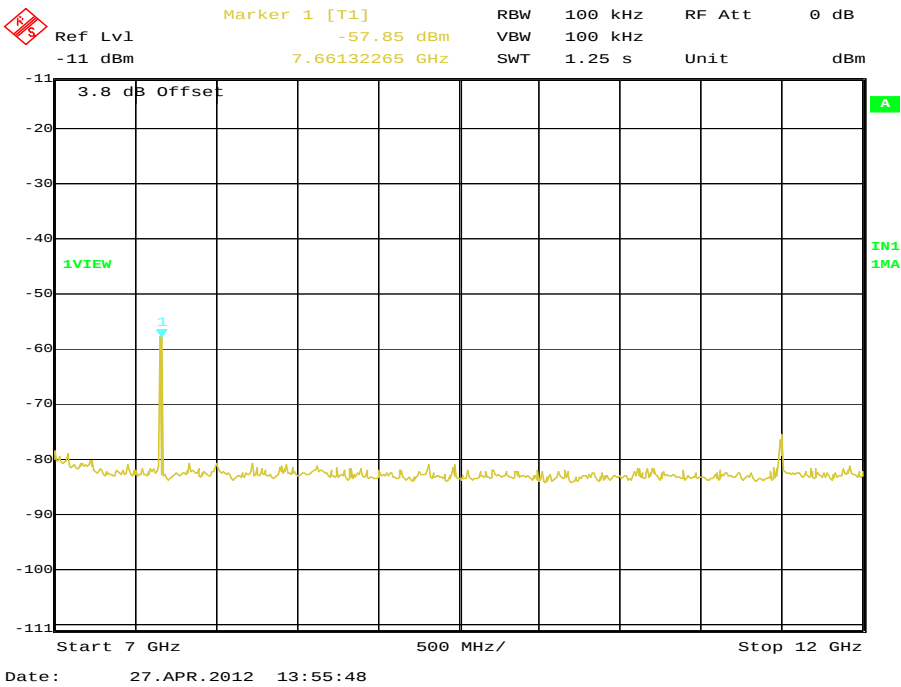




Product Service

12 GHz to 18 GHz

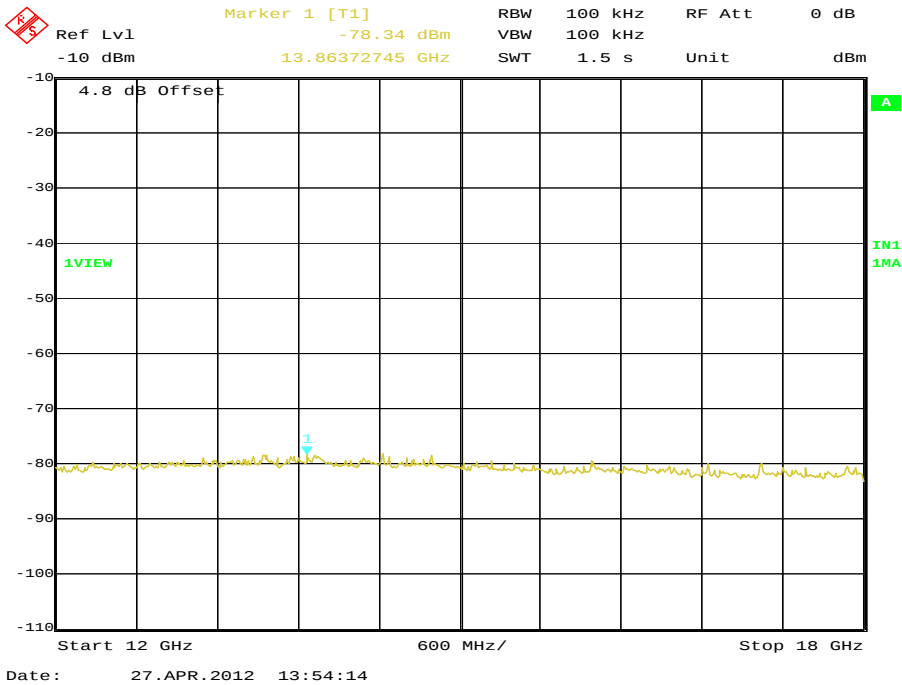


18 GHz to 25 GHz

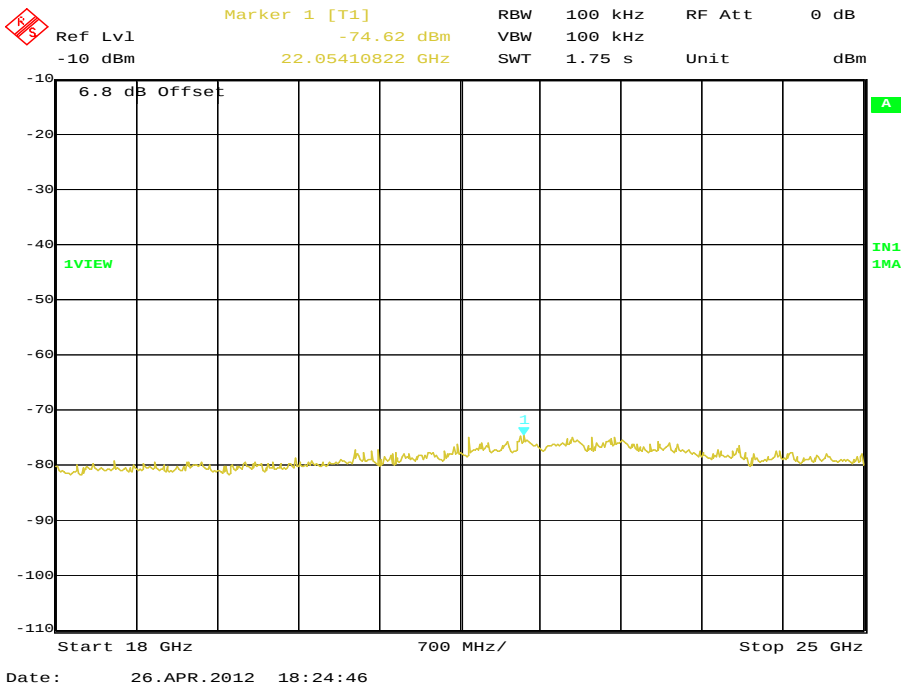




Product Service

25 GHz to 40 GHz

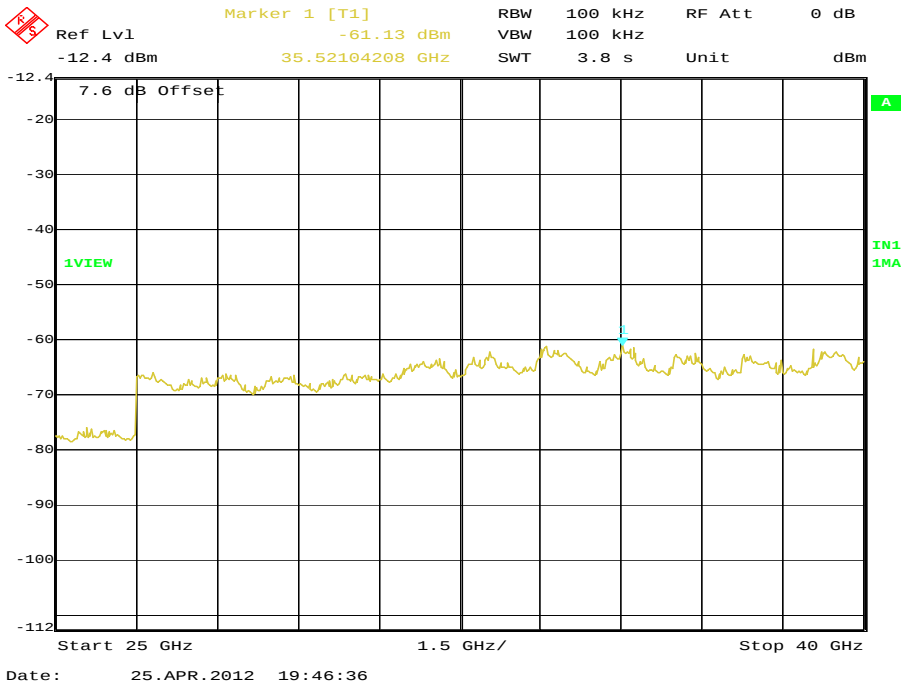

5785 MHz


9 kHz to 7 GHz

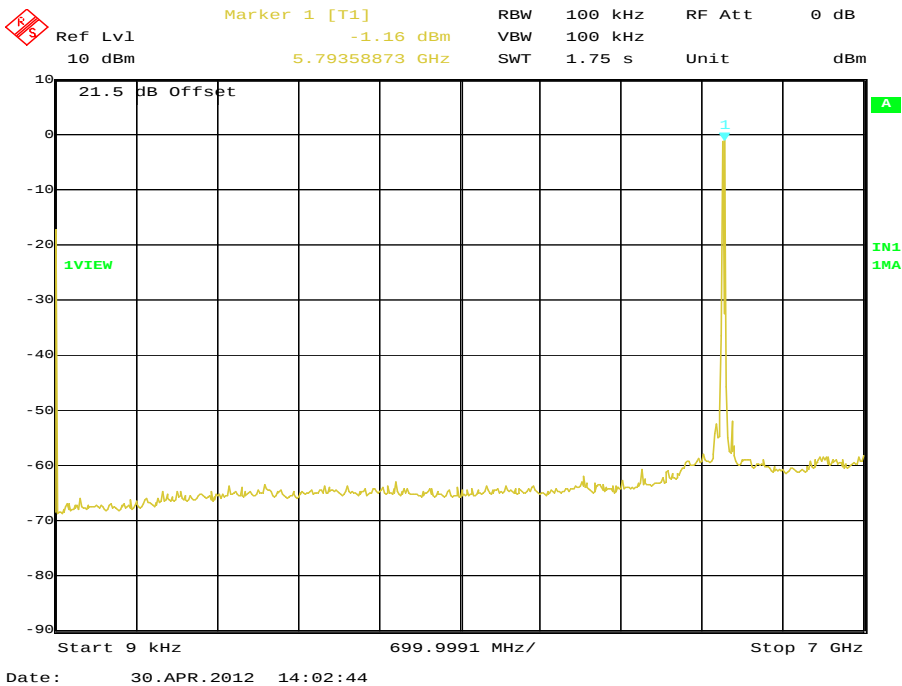




Product Service

7 GHz to 12 GHz

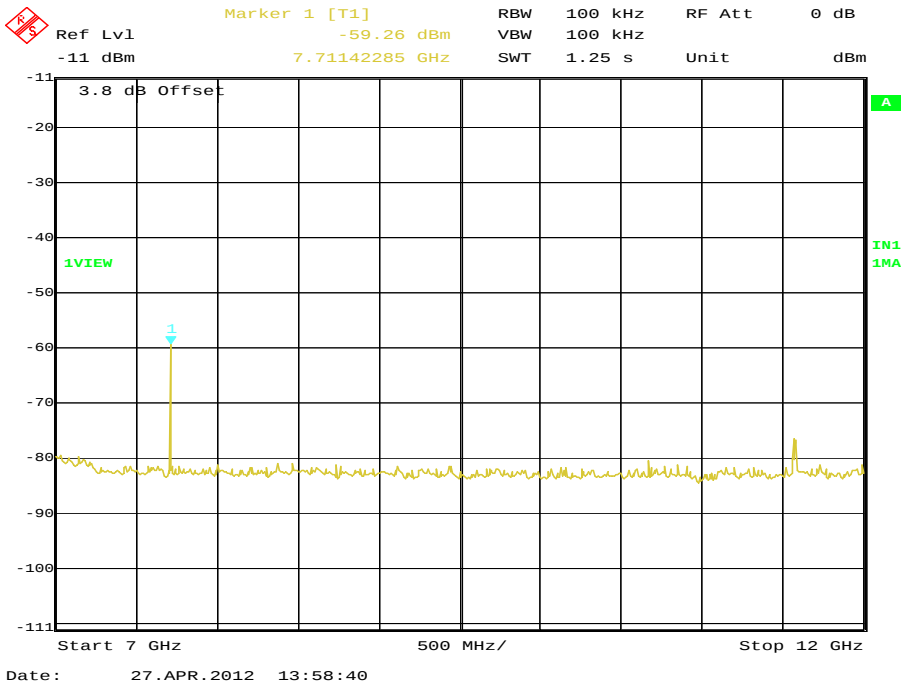


12 GHz to 18 GHz

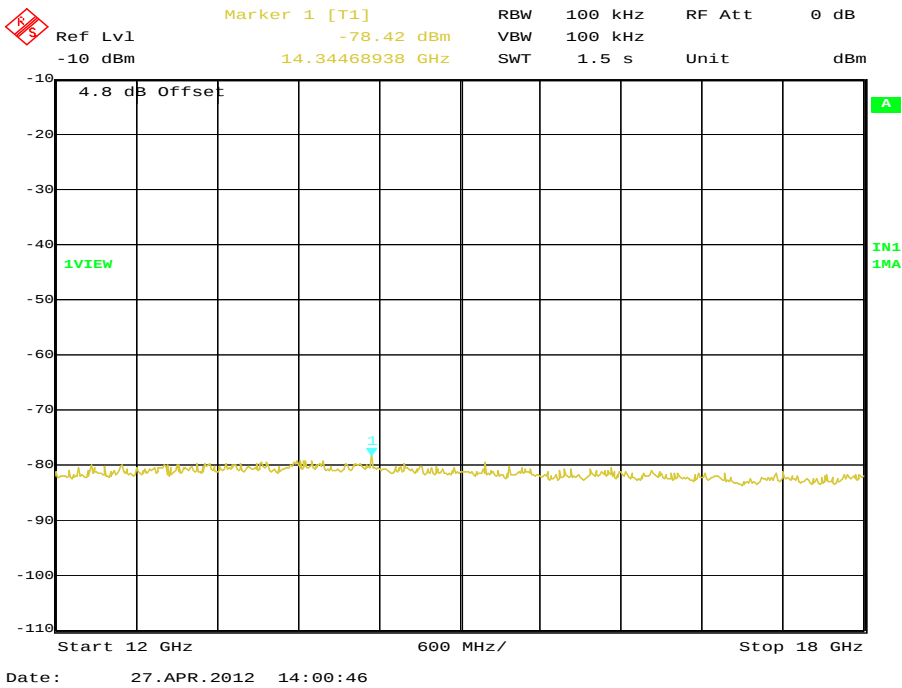




Product Service

18 GHz to 25 GHz

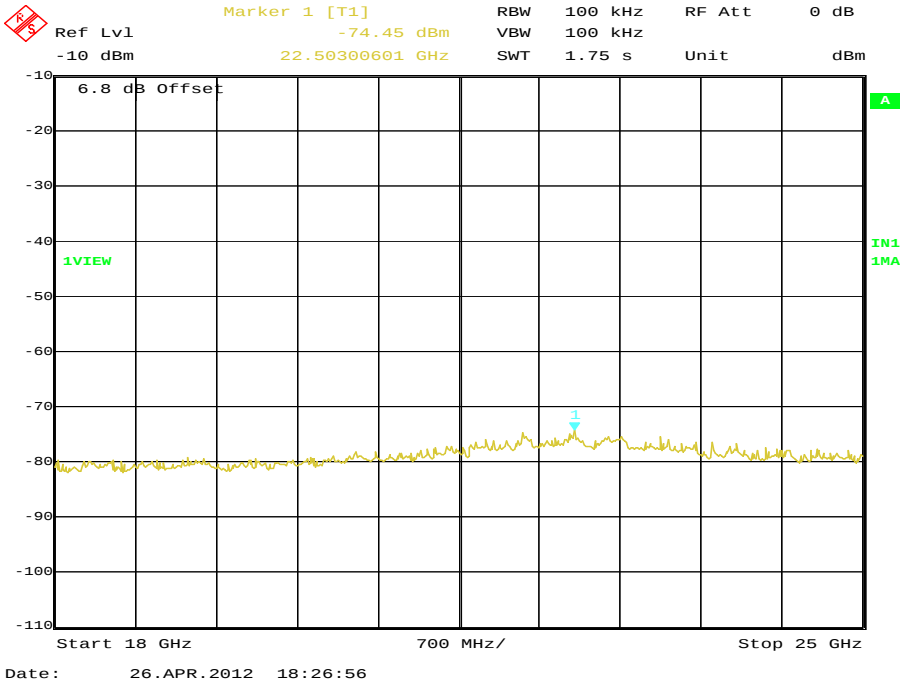

25 GHz to 40 GHz

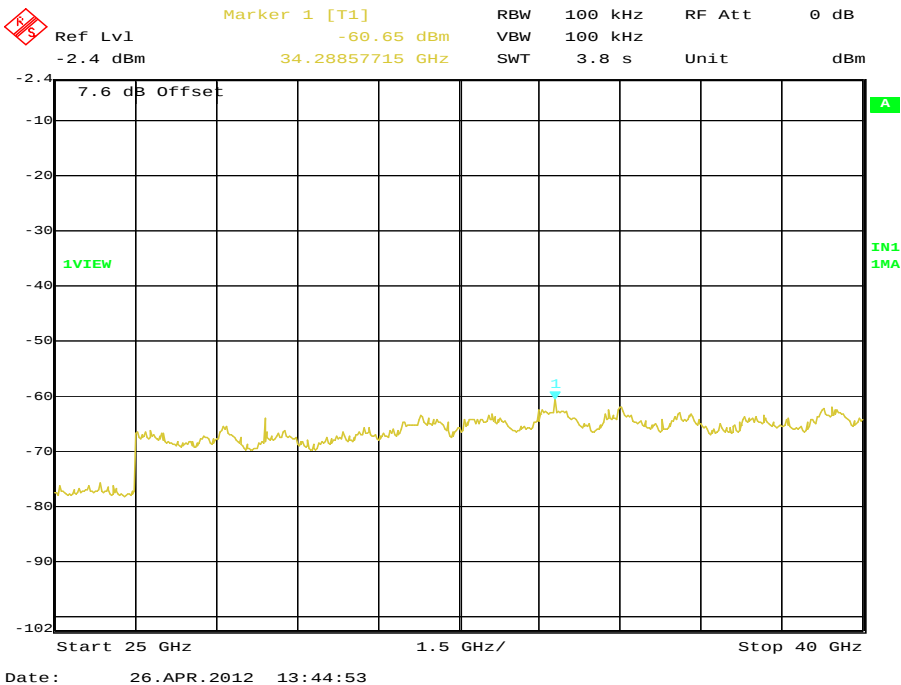





Product Service

5805 MHz

9 kHz to 7 GHz

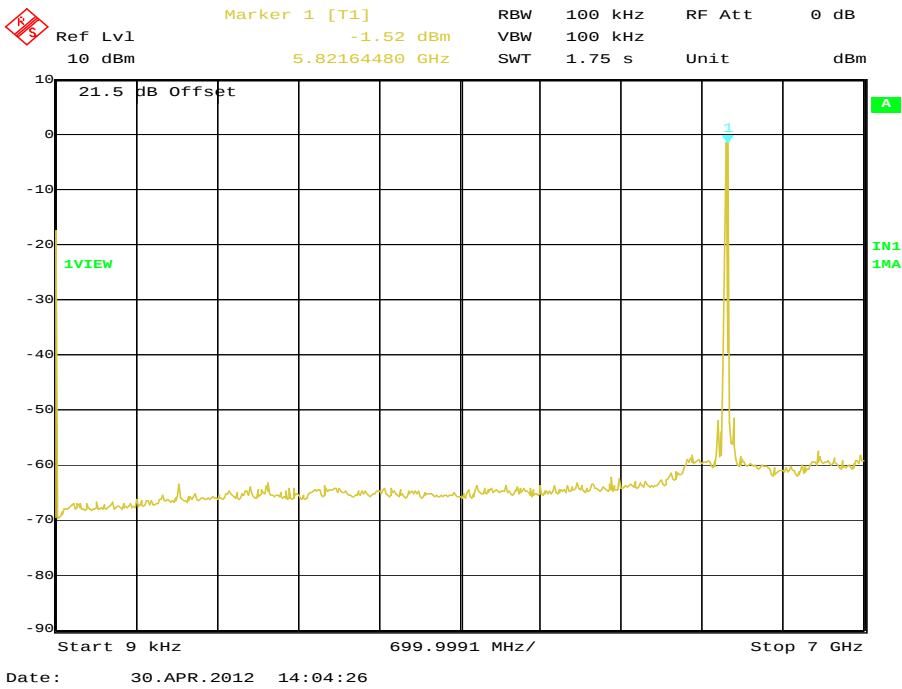


7 GHz to 12 GHz

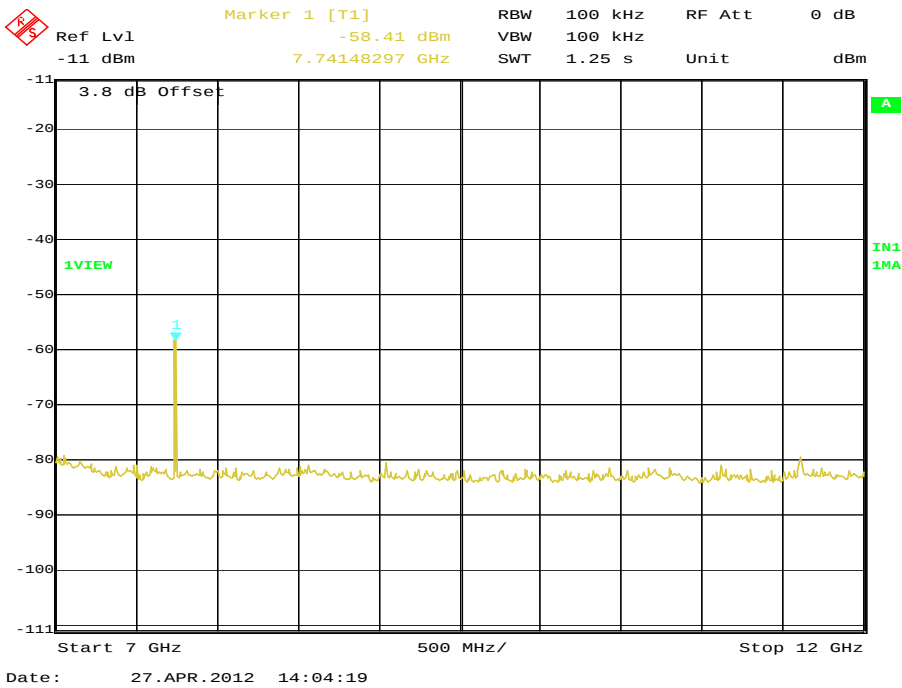




12 GHz to 18 GHz

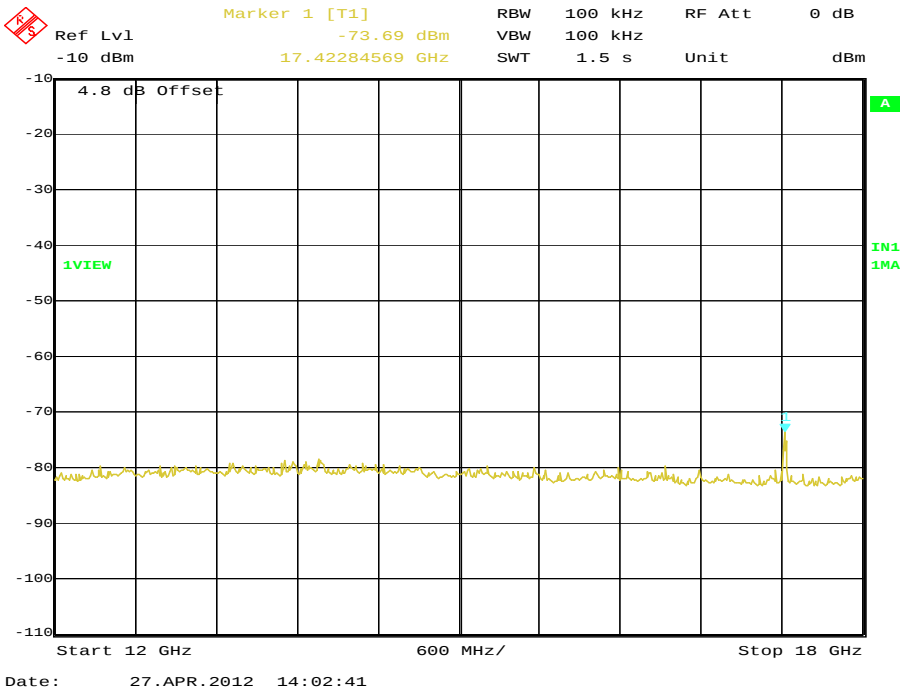


18 GHz to 25 GHz

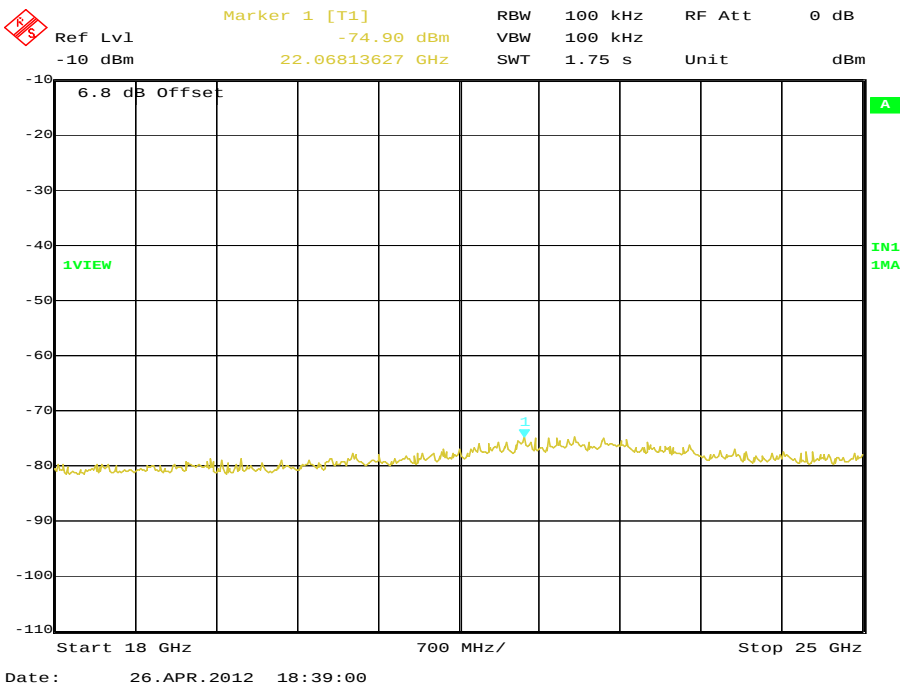



25 GHz to 40 GHz

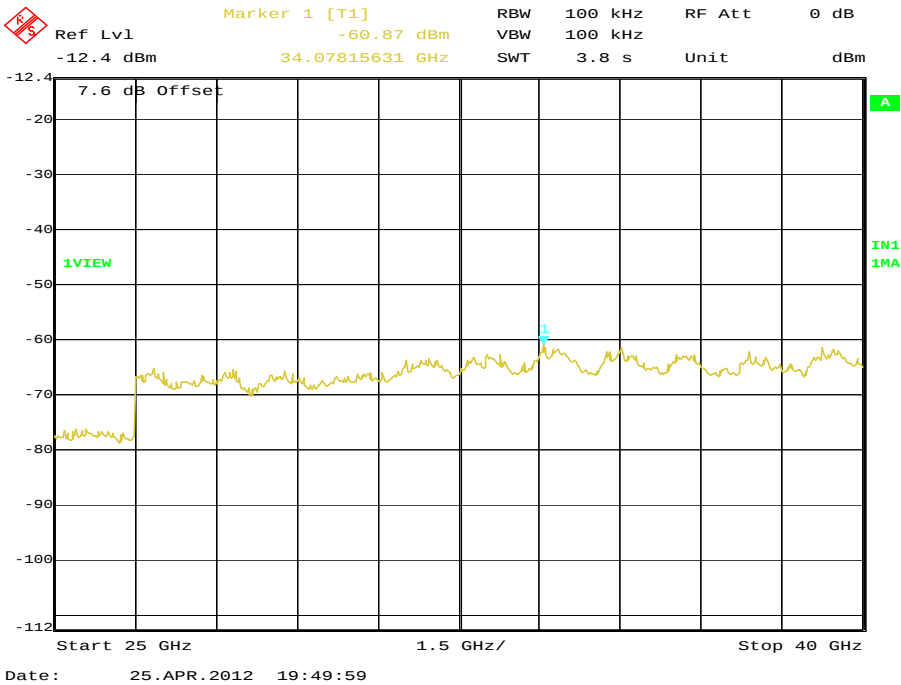

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.




Product Service

Spurious Radiated Emissions

Frequency Band 1

5180 MHz

30 MHz to 1 GHz

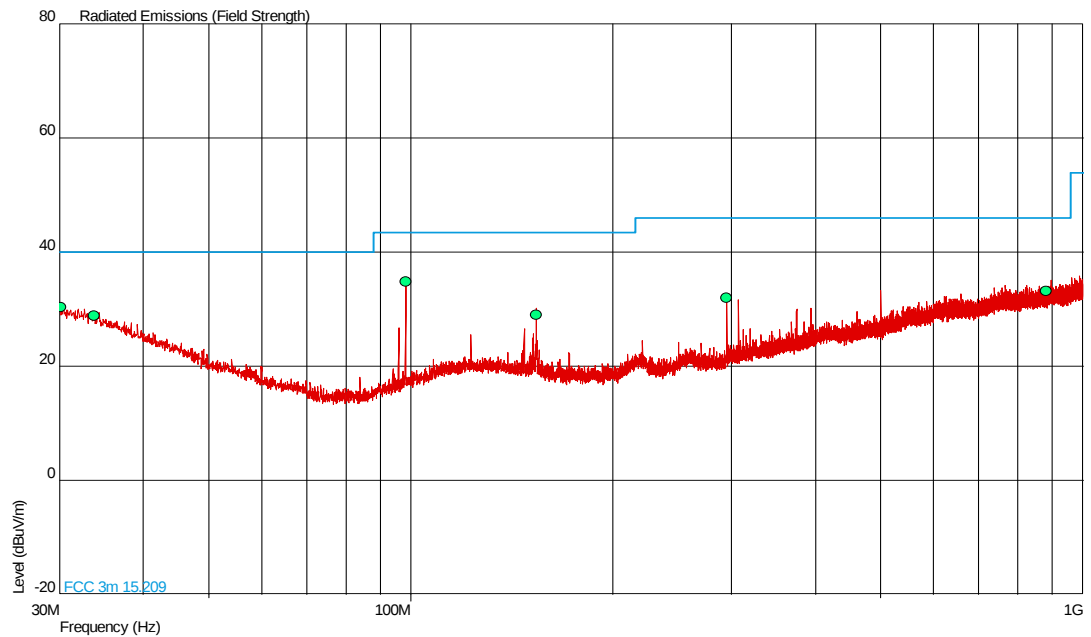


Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.200	30.4	33.1	40.0	100	-9.6	66.9	260	1.00	Vertical
33.838	28.9	27.9	40.0	100	-11.1	72.1	233	1.00	Horizontal
98.294	34.9	55.6	43.5	150	-8.6	94.4	267	1.00	Vertical
153.574	29.0	28.2	43.5	150	-14.5	121.8	75	1.00	Vertical
294.901	32.0	39.8	46.0	200	-14.0	160.2	186	1.00	Horizontal
880.860	33.2	45.7	46.0	200	-12.8	154.3	198	2.10	Vertical




Product Service

1 GHz to 7 GHz

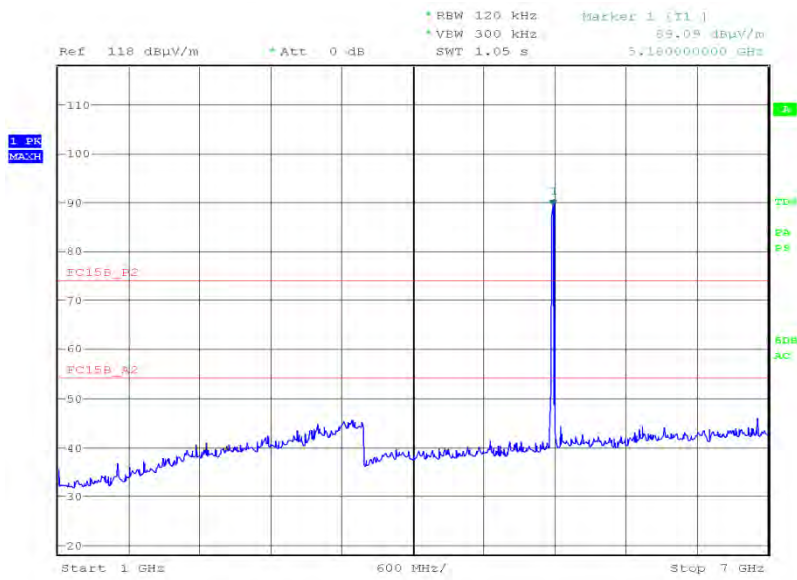

Date: 13.MAR.2012 19:05:48

7 GHz to 8 GHz

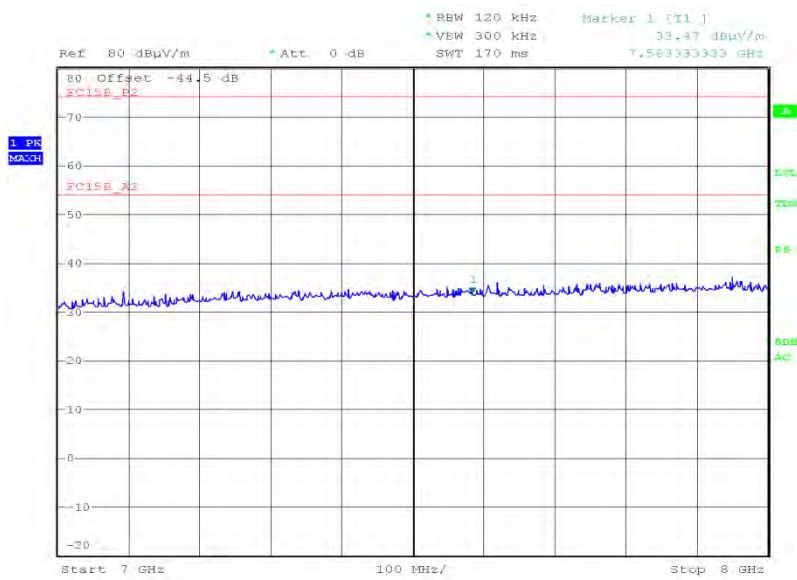


Date: 14.MAR.2012 19:01:54




Product Service

8 GHz to 18 GHz

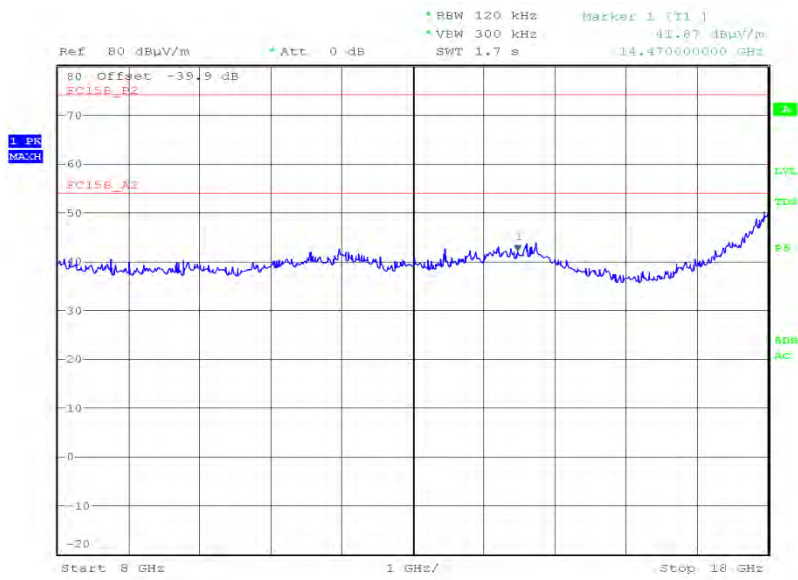

Date: 15.MAR.2012 00:11:09


18 GHz to 40 GHz

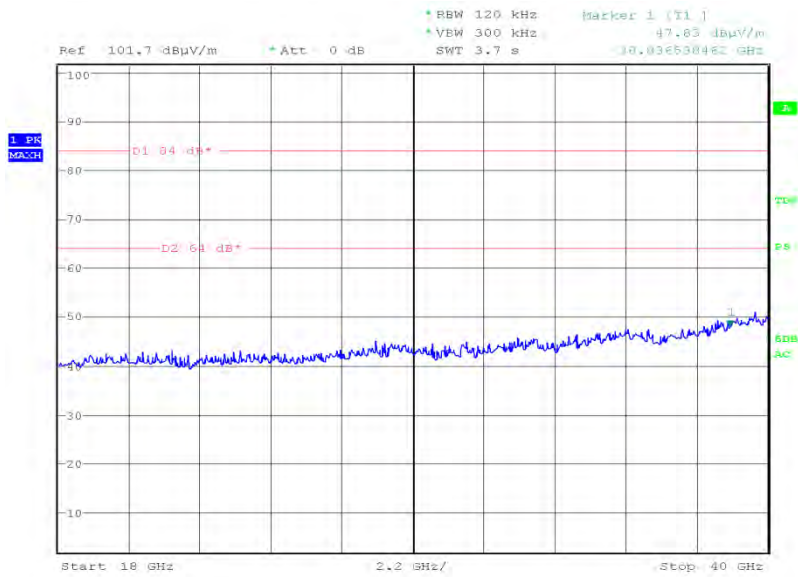

Date: 3.APR.2012 21:33:26



Product Service

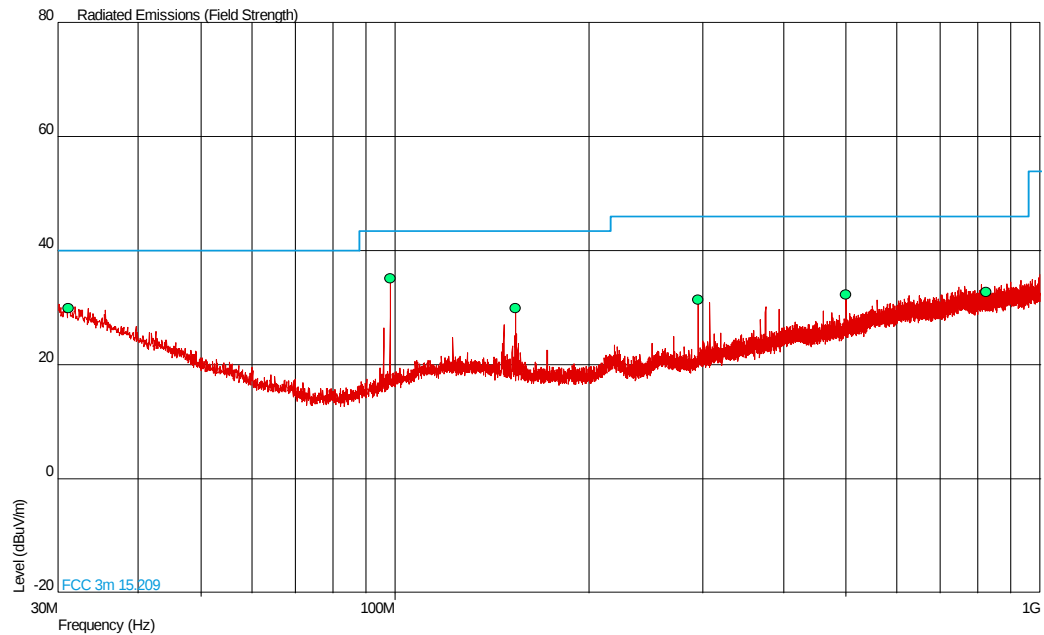
5220 MHz30 MHz to 1 GHz

Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
31.131	30.0	31.6	40.0	100	-10.0	68.4	130	1.00	Vertical
98.309	35.1	56.9	43.5	150	-8.4	93.1	255	1.37	Vertical
153.593	29.9	31.3	43.5	150	-13.6	118.7	73	1.00	Vertical
294.932	31.4	37.2	46.0	200	-14.6	162.8	200	1.00	Horizontal
500.006	32.3	41.2	46.0	200	-13.7	158.8	353	1.37	Vertical
824.367	32.7	43.2	46.0	200	-13.3	156.8	52	1.00	Horizontal




Product Service

1 GHz to 7 GHz

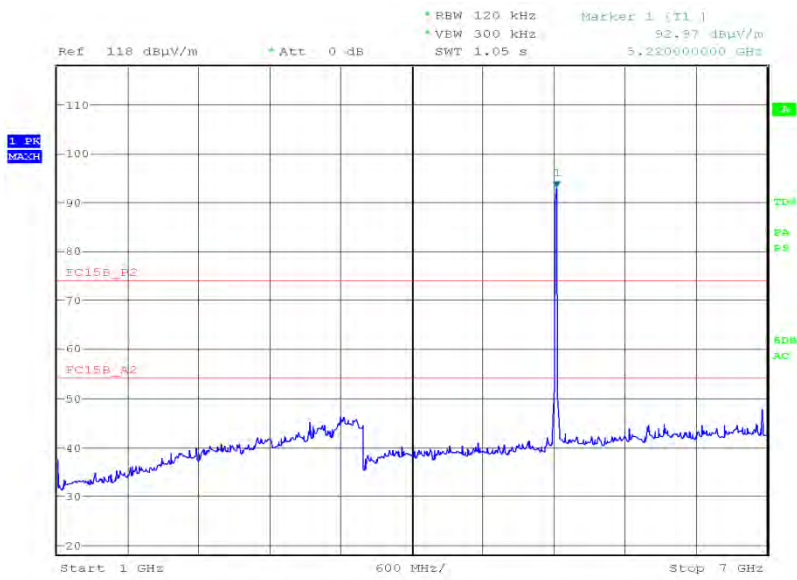

Date: 13.MAR.2012 19:10:02

7 GHz to 8 GHz

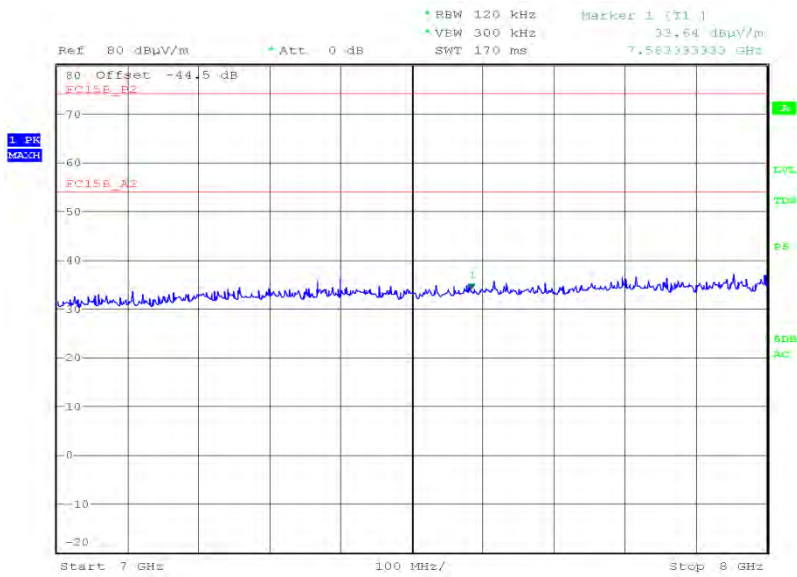


Date: 14.MAR.2012 19:06:05




Product Service

8 GHz to 18 GHz

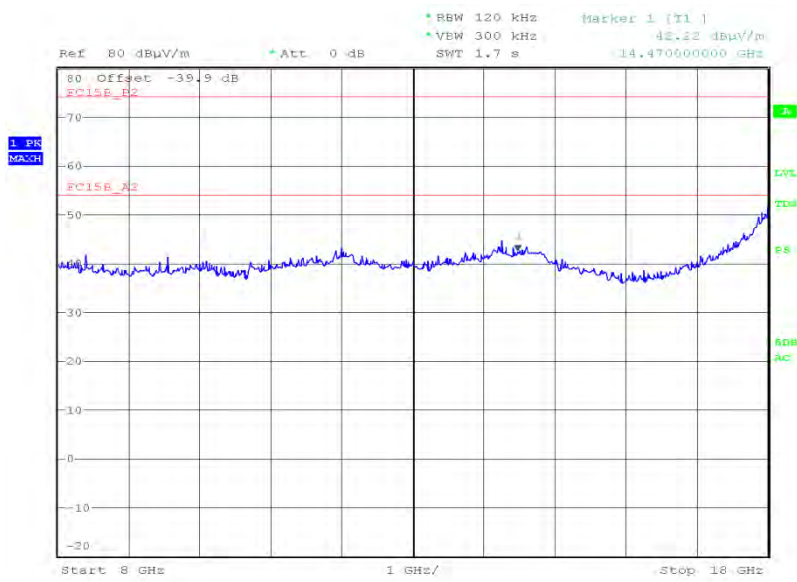

Date: 14.MAR.2012 23:59:44

18 GHz to 40 GHz

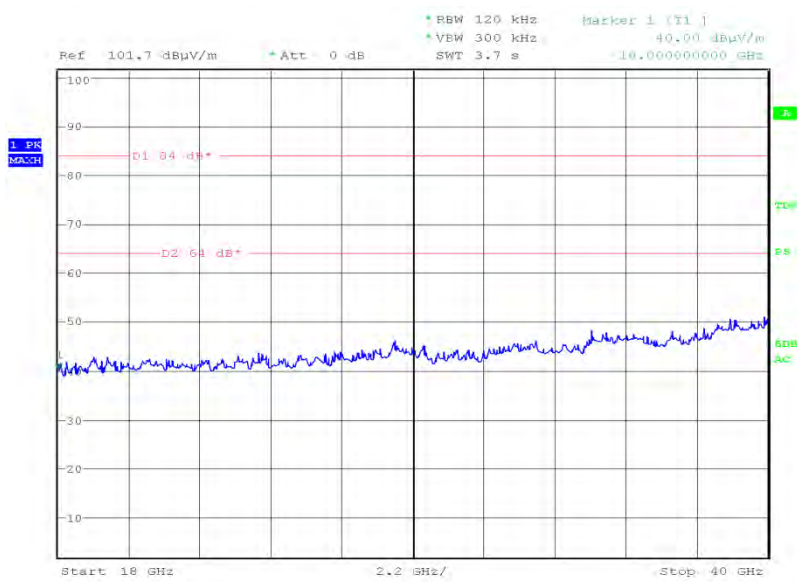


Date: 3.APR.2012 21:46:33



Product Service

5240 MHz

30 MHz to 1 GHz

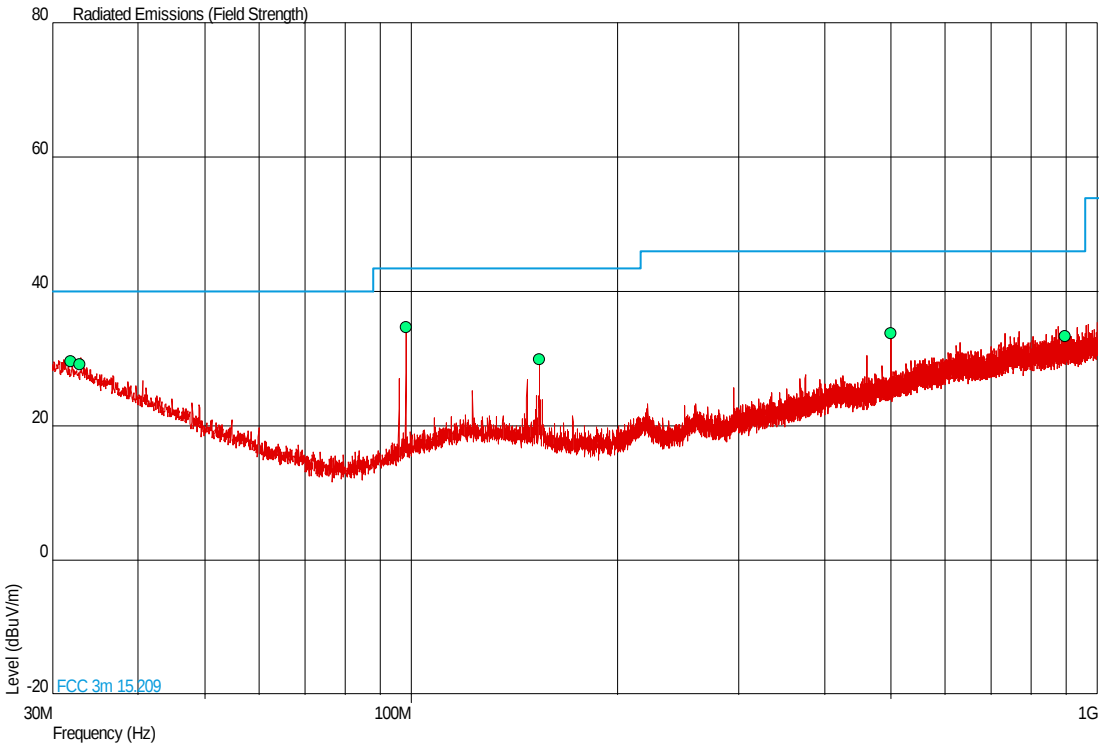


Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
31.934	29.6	30.2	40.0	100	-10.4	69.8	349	2.09	Vertical
32.908	29.3	29.2	40.0	100	-10.7	70.8	299	1.00	Vertical
98.307	34.7	54.3	43.5	150	-8.8	95.7	287	1.00	Vertical
153.608	29.9	31.3	43.5	150	-13.6	118.7	79	1.00	Vertical
500.058	33.8	49.0	46.0	200	-12.2	151.0	352	1.00	Vertical
895.410	33.4	46.8	46.0	200	-12.6	153.2	0	1.00	Vertical




Product Service

1 GHz to 7 GHz

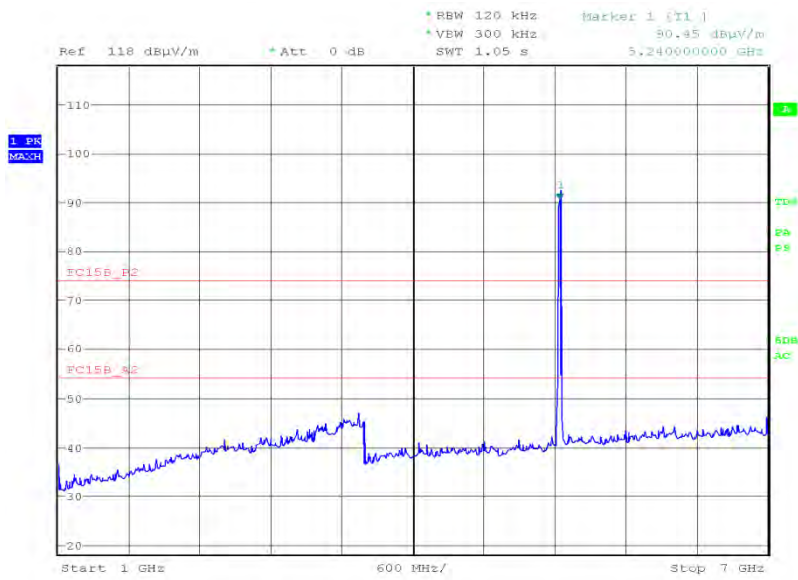

Date: 13.MAR.2012 23:09:51

7 GHz to 8 GHz

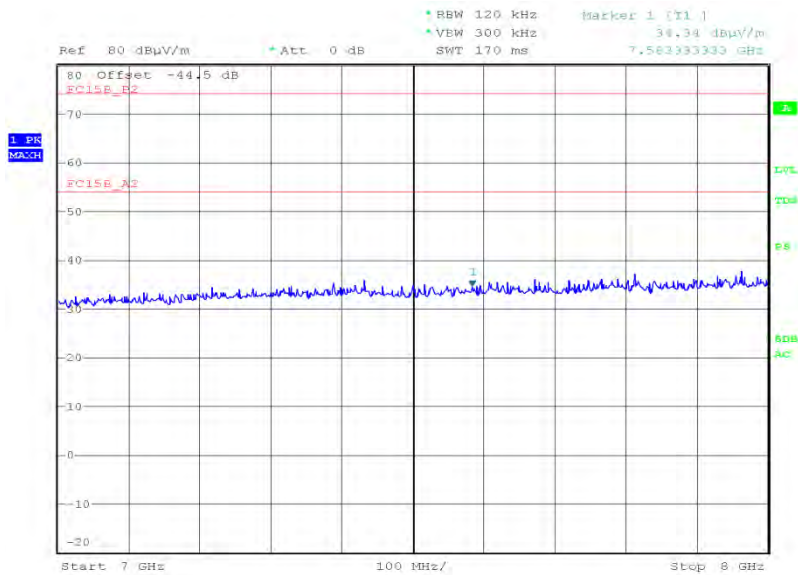


Date: 14.MAR.2012 19:18:55




Product Service

8 GHz to 18 GHz

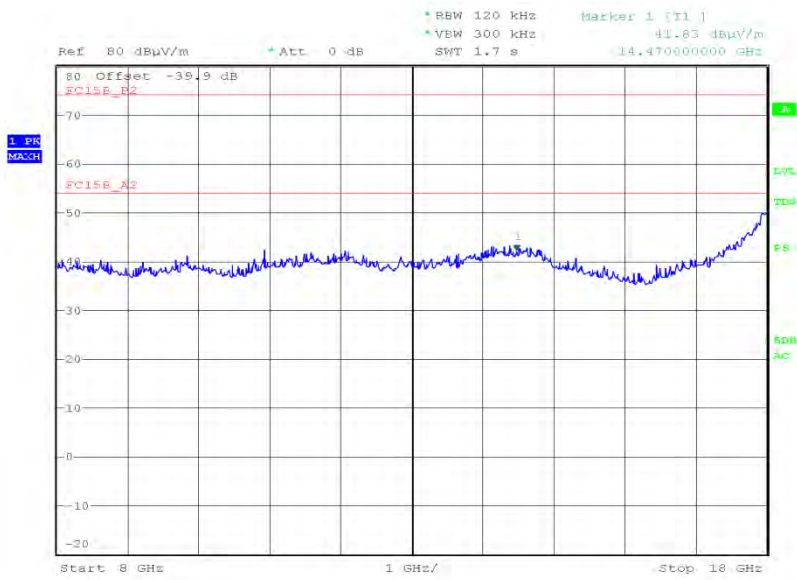

Date: 14.MAR.2012 23:50:00

18 GHz to 40 GHz

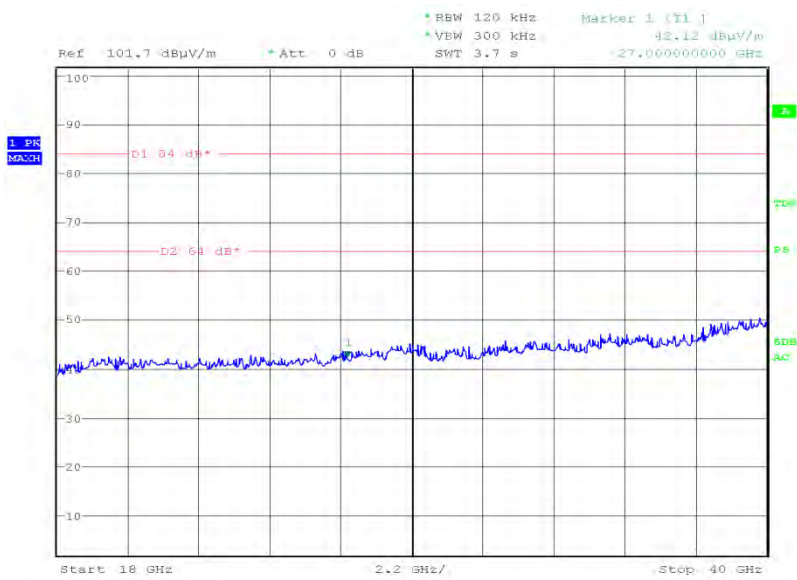

Date: 3.APR.2012 21:54:23




Product Service

Frequency Band 2

5260 MHz

30 MHz to 1 GHz

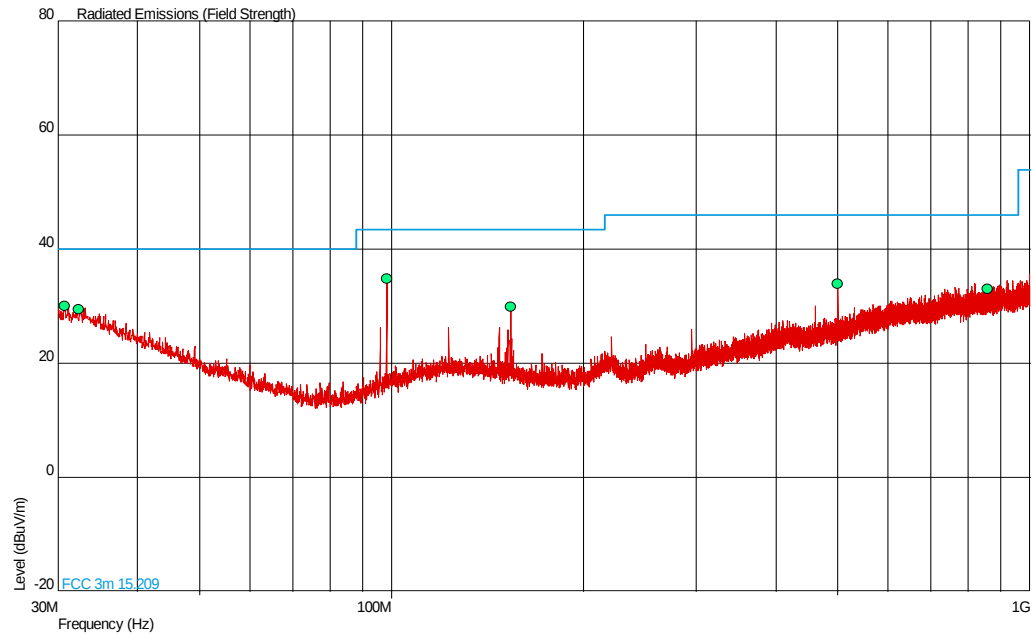


Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.771	30.1	32.0	40.0	100	-9.9	68.0	20	1.00	Vertical
32.393	29.4	29.5	40.0	100	-10.6	70.5	246	1.00	Vertical
98.304	34.9	55.6	43.5	150	-8.6	94.4	279	1.25	Vertical
153.611	29.9	31.3	43.5	150	-13.6	118.7	83	1.00	Vertical
500.037	34.0	50.1	46.0	200	-12.0	149.9	169	1.00	Vertical
859.154	33.1	45.2	46.0	200	-12.9	154.8	234	1.00	Vertical




Product Service

1 GHz to 7 GHz

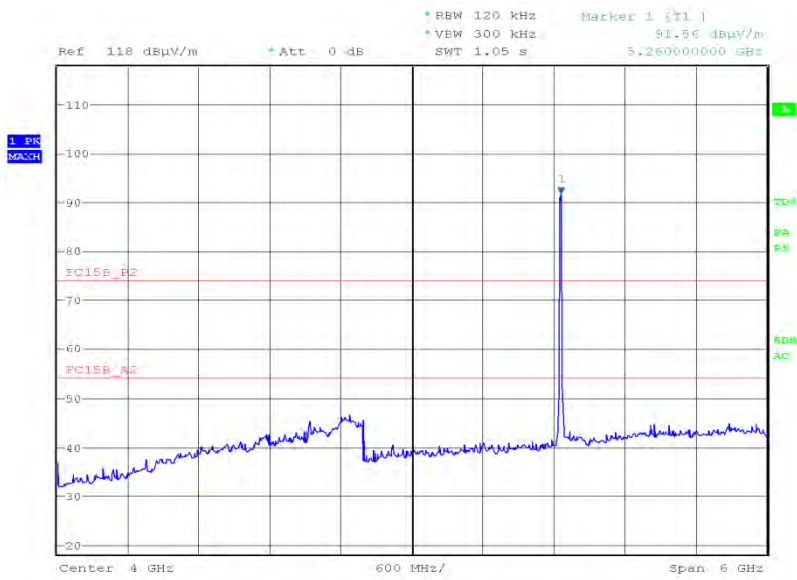

Date: 13.MAR.2012 19:53:50

7 GHz to 8 GHz

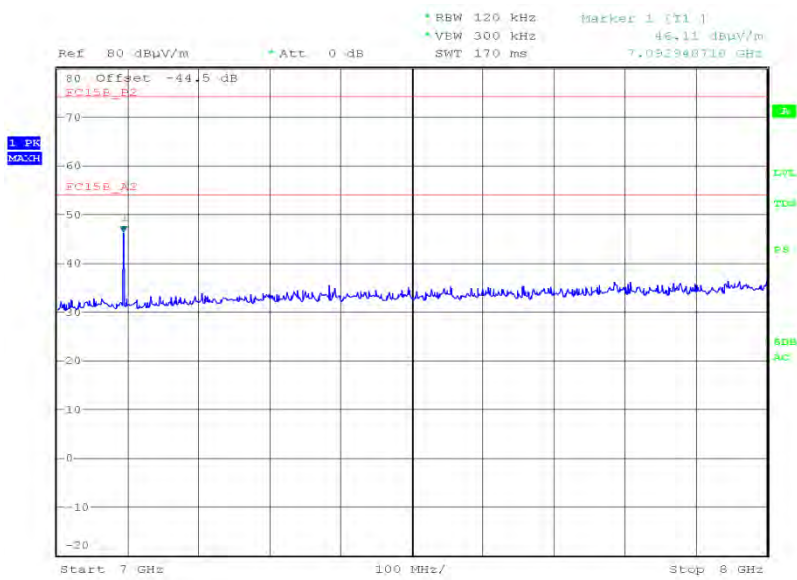


Date: 14.MAR.2012 19:24:43




Product Service

8 GHz to 18 GHz

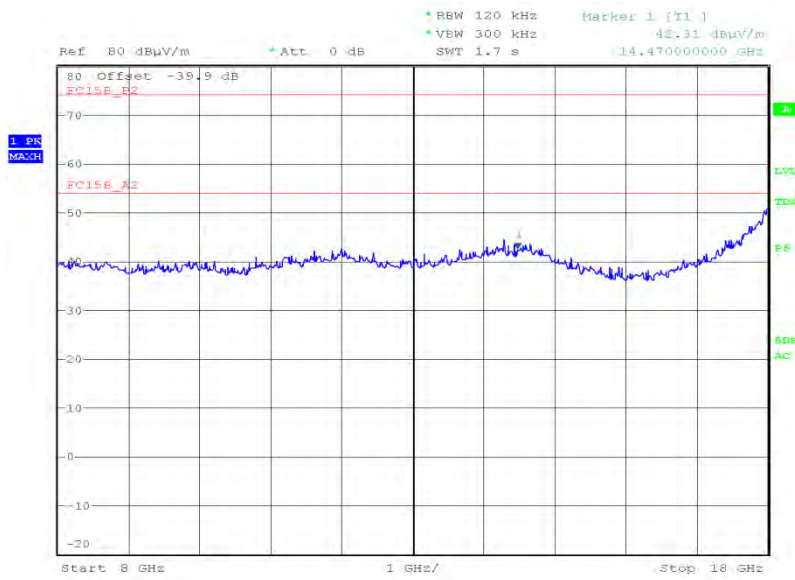

Date: 14.MAR.2012 23:40:22

18 GHz to 40 GHz

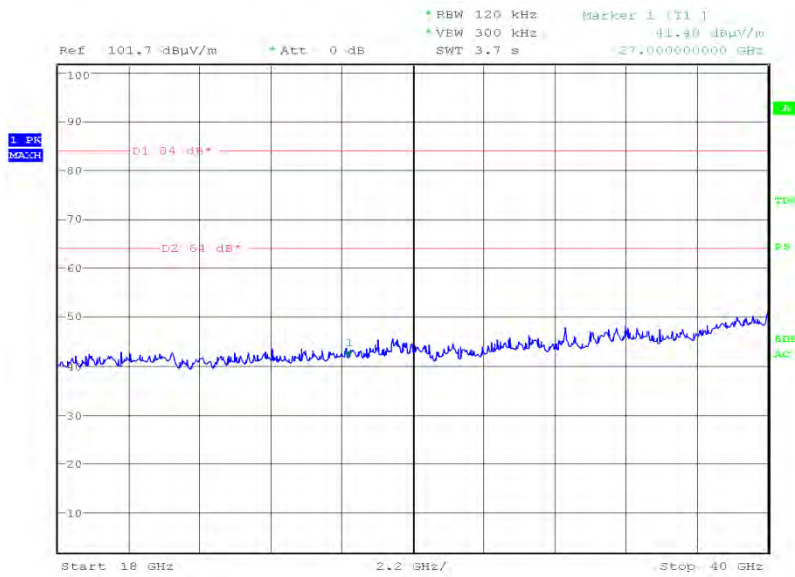


Date: 3.APR.2012 22:03:51



Product Service

5300 MHz

30 MHz to 1 GHz

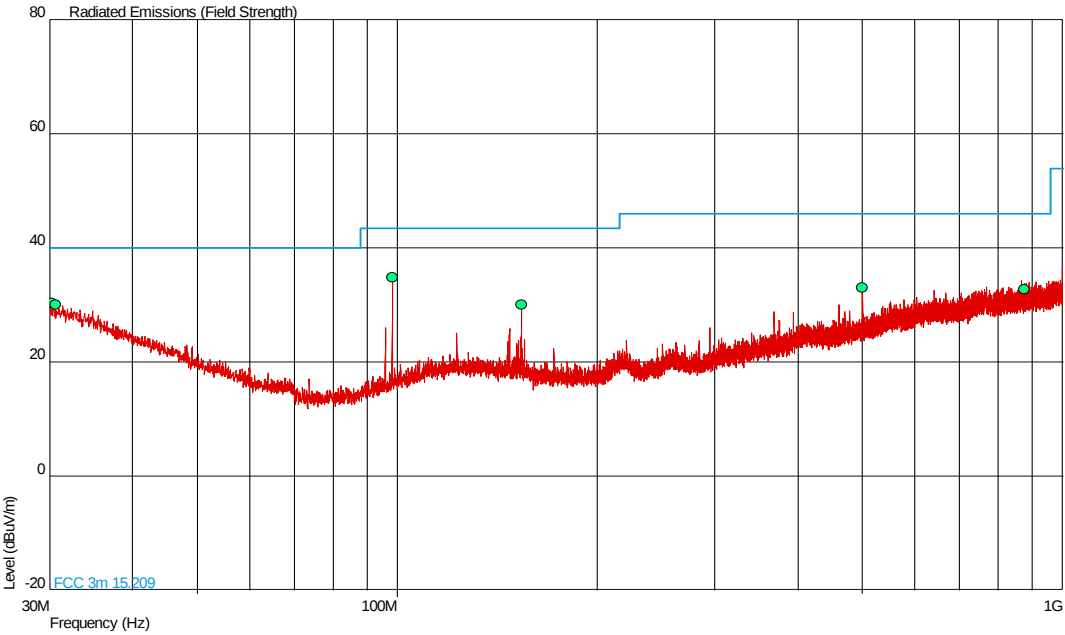

Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.236	30.4	33.1	40.0	100	-9.6	66.9	194	1.00	Vertical
30.654	30.1	32.0	40.0	100	-9.9	68.0	230	2.08	Vertical
98.315	34.9	55.6	43.5	150	-8.6	94.4	251	1.40	Vertical
153.598	30.0	31.6	43.5	150	-13.5	118.4	76	1.00	Vertical
500.014	33.1	45.2	46.0	200	-12.9	154.8	351	1.00	Vertical
874.841	32.8	43.7	46.0	200	-13.2	156.3	352	1.00	Vertical




Product Service

1GHz to 40GHz


Frequency (GHz)	Antenna Polarisation	Antenna Height (cm)	EUT Arc (degrees)	Final Peak (dBµV/m)	Final Average (dBµV/m)
5.372	Vertical	100	345	54.52	45.82

1 GHz to 7 GHz

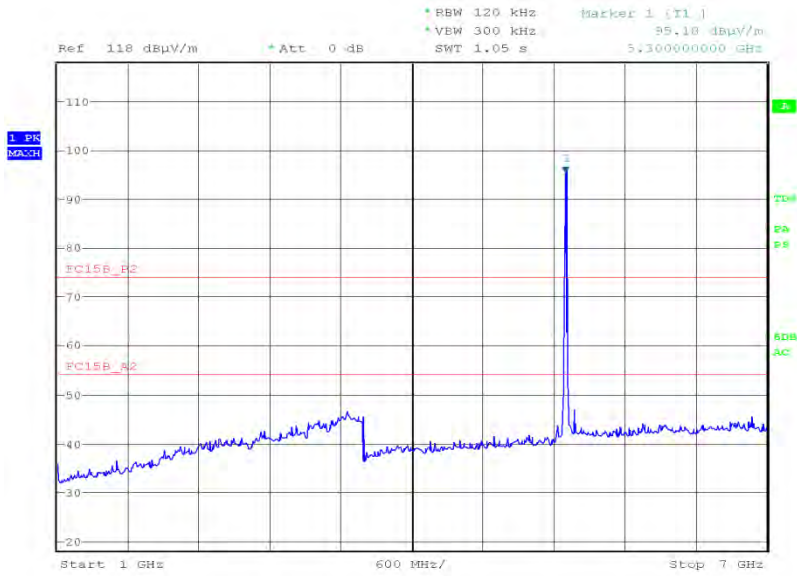

Date: 13.MAR.2012 20:50:00

7 GHz to 8 GHz

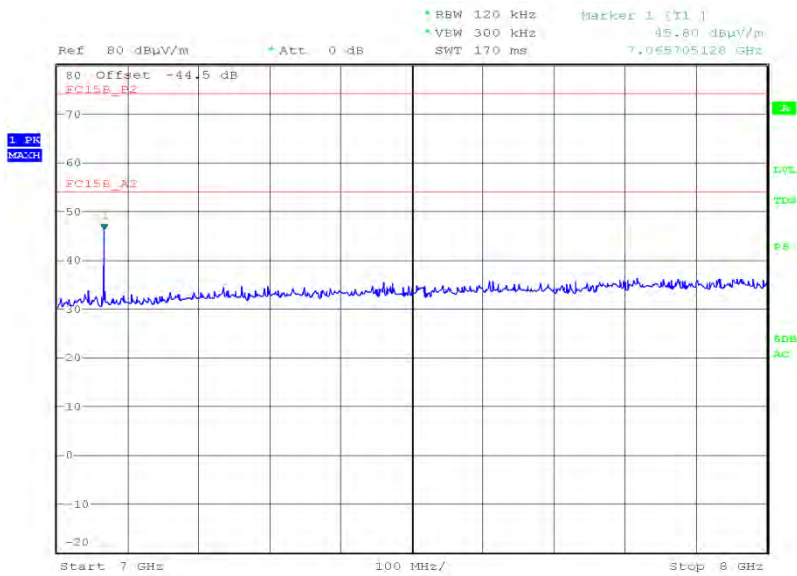


Date: 14.MAR.2012 19:32:18




Product Service

8 GHz to 18 GHz

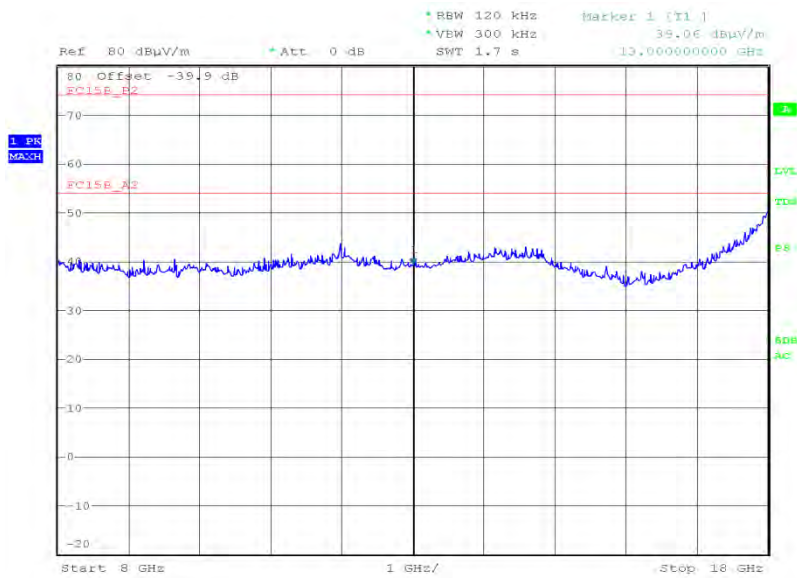

Date: 14.MAR.2012 23:42:53

18 GHz to 40 GHz

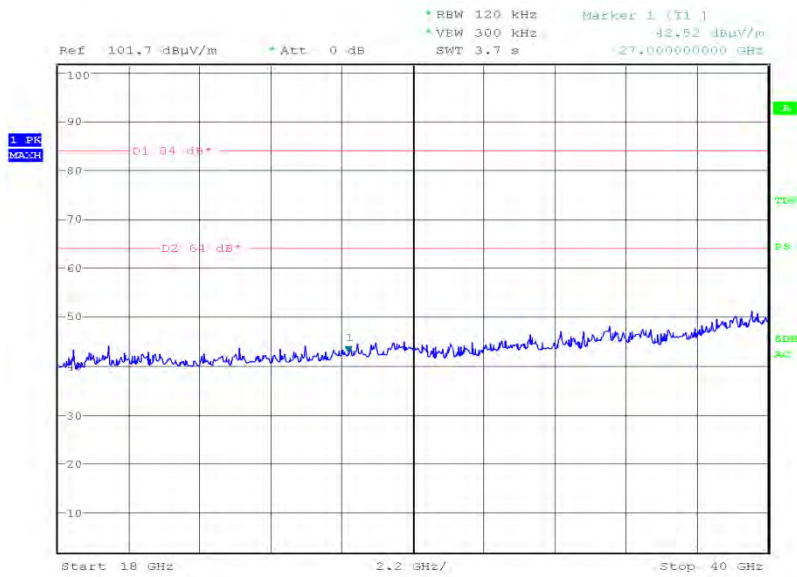


Date: 3.APR.2012 22:11:46



Product Service

5320 MHz

30 MHz to 1 GHz

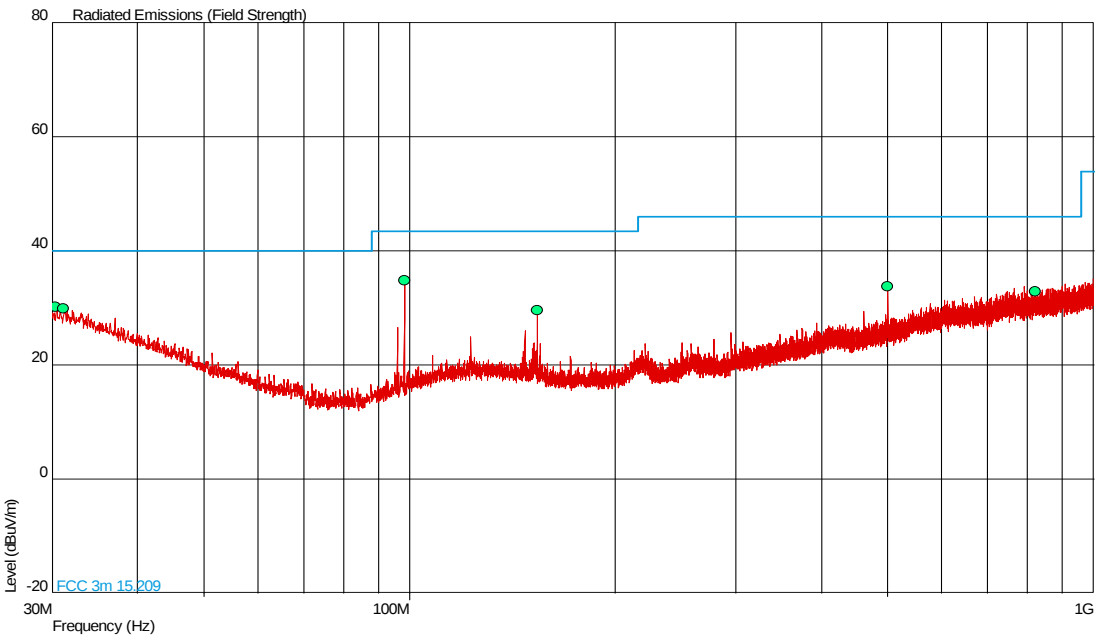

Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.387	30.2	32.4	40.0	100	-9.8	67.6	207	1.00	Vertical
31.140	30.0	31.6	40.0	100	-10.0	68.4	154	1.00	Vertical
98.304	34.9	55.6	43.5	150	-8.6	94.4	272	1.00	Vertical
153.586	29.6	30.2	43.5	150	-13.9	119.8	66	1.00	Vertical
500.030	33.7	48.4	46.0	200	-12.3	151.6	349	1.37	Vertical
820.497	32.9	44.2	46.0	200	-13.1	155.8	106	1.00	Vertical




Product Service

1GHz to 40GHz


Frequency (GHz)	Antenna Polarisation	Antenna Height (cm)	EUT Arc (degrees)	Final Peak (dBµV/m)	Final Average (dBµV/m)
5.392	Vertical	100	006	52.69	45.96

1 GHz to 7 GHz

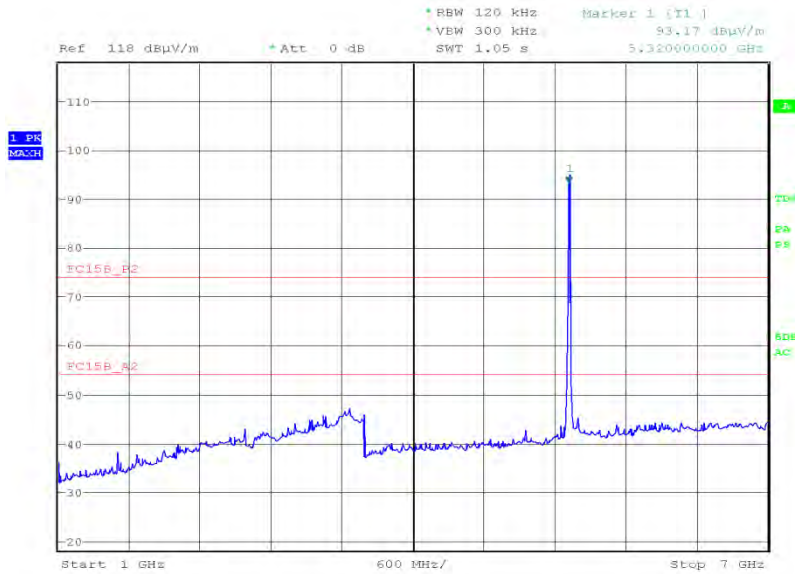

Date: 13.MAR.2012 20:52:49


7 GHz to 8 GHz

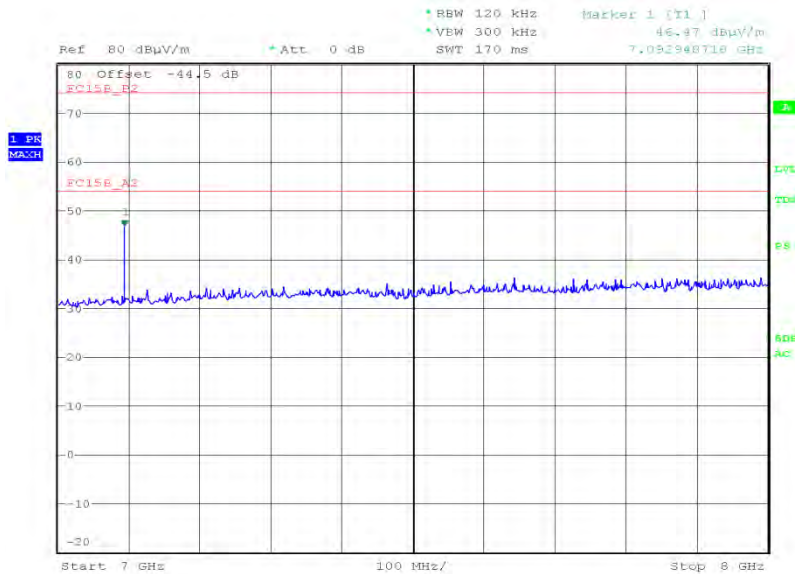


Date: 14.MAR.2012 19:42:38



Product Service

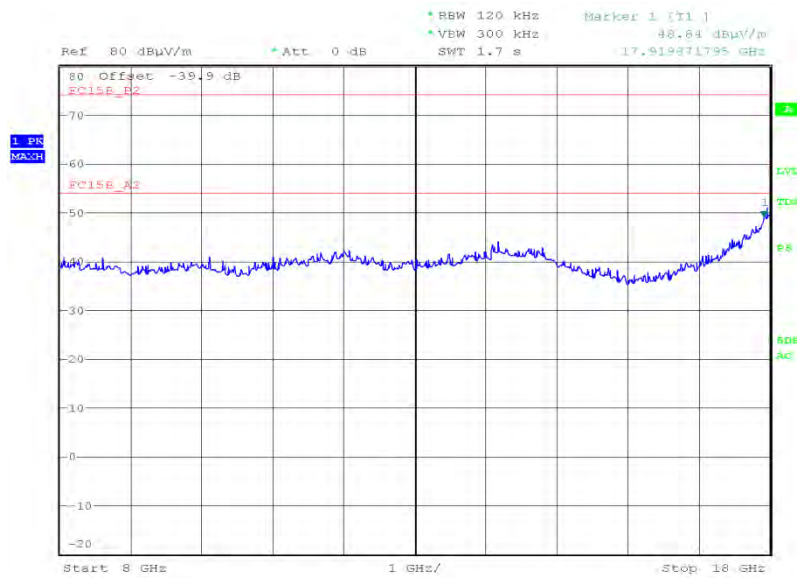8 GHz to 18 GHz

Date: 14.MAR.2012 23:43:29

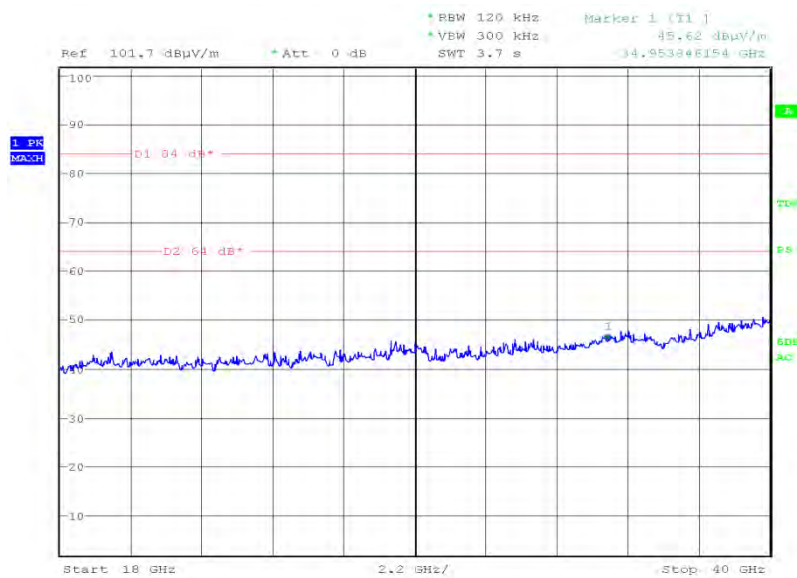18 GHz to 40 GHz

Date: 3.APR.2012 22:19:42




Product Service

Frequency Band 3

5500 MHz

30 MHz to 1 GHz

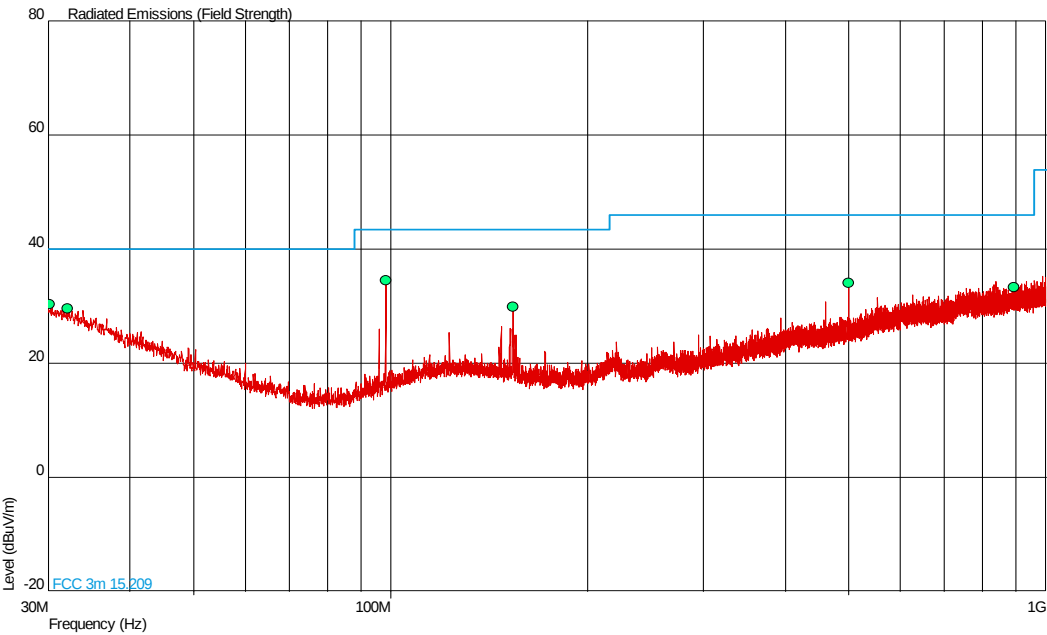

Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.145	30.4	33.1	40.0	100	-9.6	66.9	174	1.00	Vertical
32.144	29.6	30.2	40.0	100	-10.4	69.8	150	1.00	Vertical
98.307	34.6	53.7	43.5	150	-8.9	96.3	259	1.69	Vertical
153.613	29.9	31.3	43.5	150	-13.6	118.7	74	1.03	Vertical
500.047	34.0	50.1	46.0	200	-12.0	149.9	354	1.00	Vertical
894.587	33.4	46.8	46.0	200	-12.6	153.2	161	1.00	Vertical




Product Service

1GHz to 40GHz


Frequency (GHz)	Antenna Polarisation	Antenna Height (cm)	EUT Arc (degrees)	Final Peak (dBµV/m)	Final Average (dBµV/m)
5.427	Vertical	100	006	54.67	43.03
7.333	Vertical	100	086	51.06	45.94

1 GHz to 7 GHz

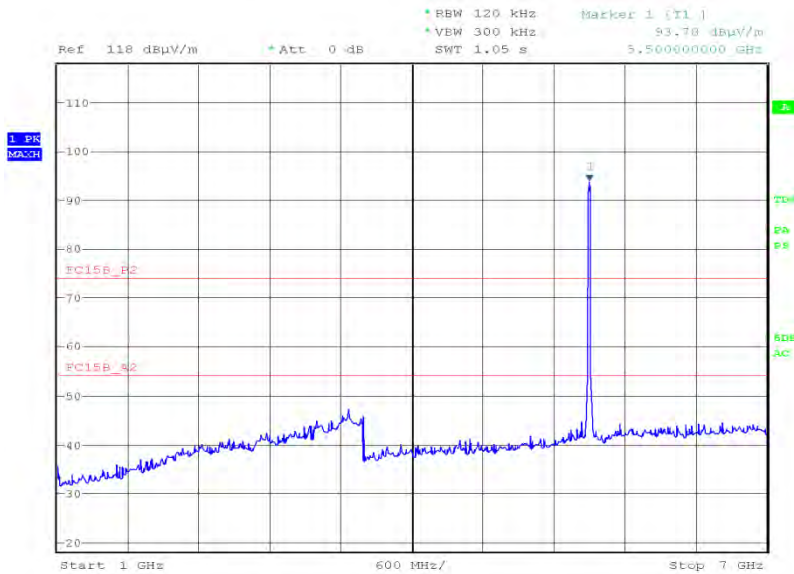

Date: 13.MAR.2012 21:31:04


7 GHz to 8 GHz

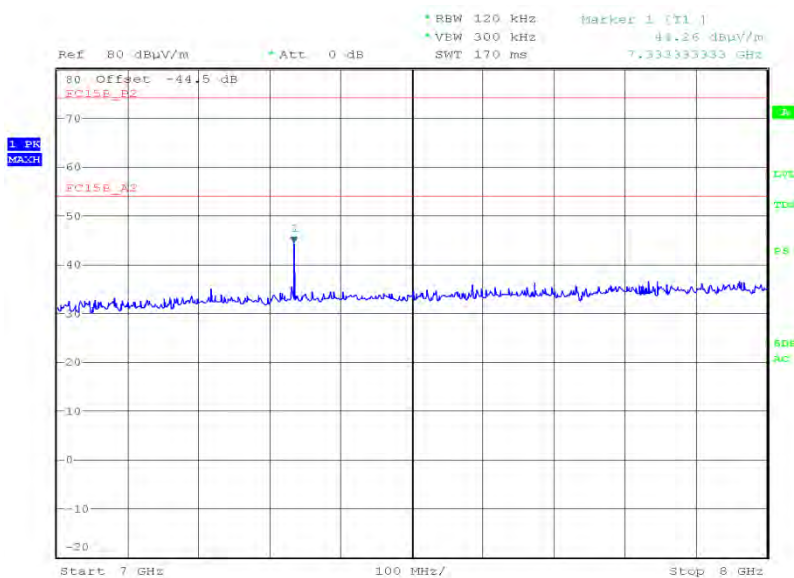


Date: 14.MAR.2012 19:54:46



Product Service

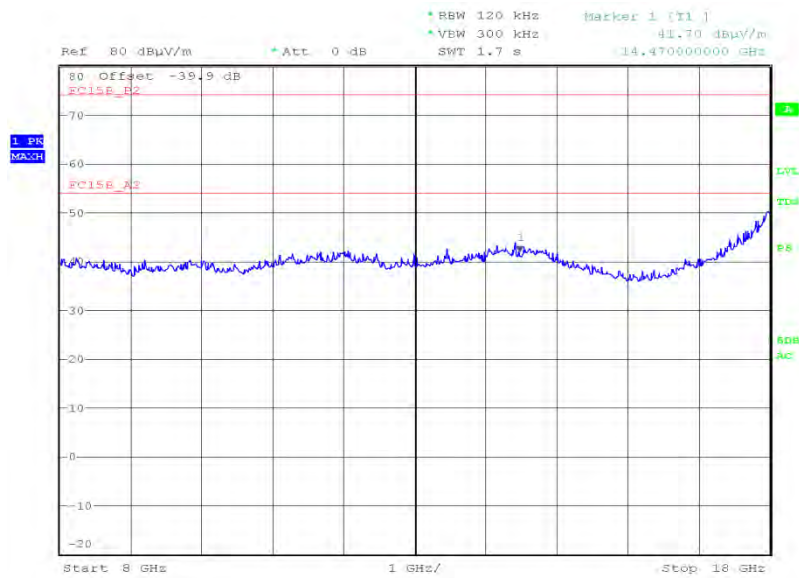8 GHz to 18 GHz

Date: 14.MAR.2012 23:10:35

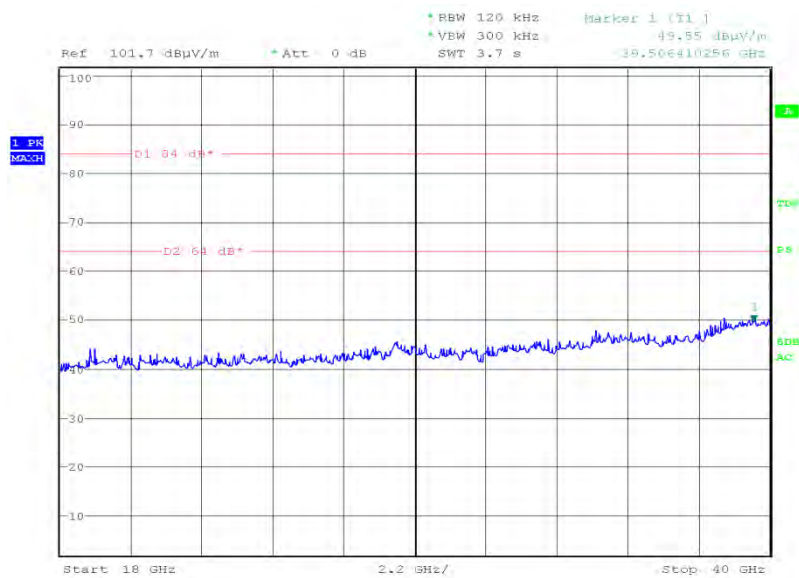18 GHz to 40 GHz


Date: 3.APR.2012 22:31:43



Product Service

5600 MHz

30 MHz to 1 GHz

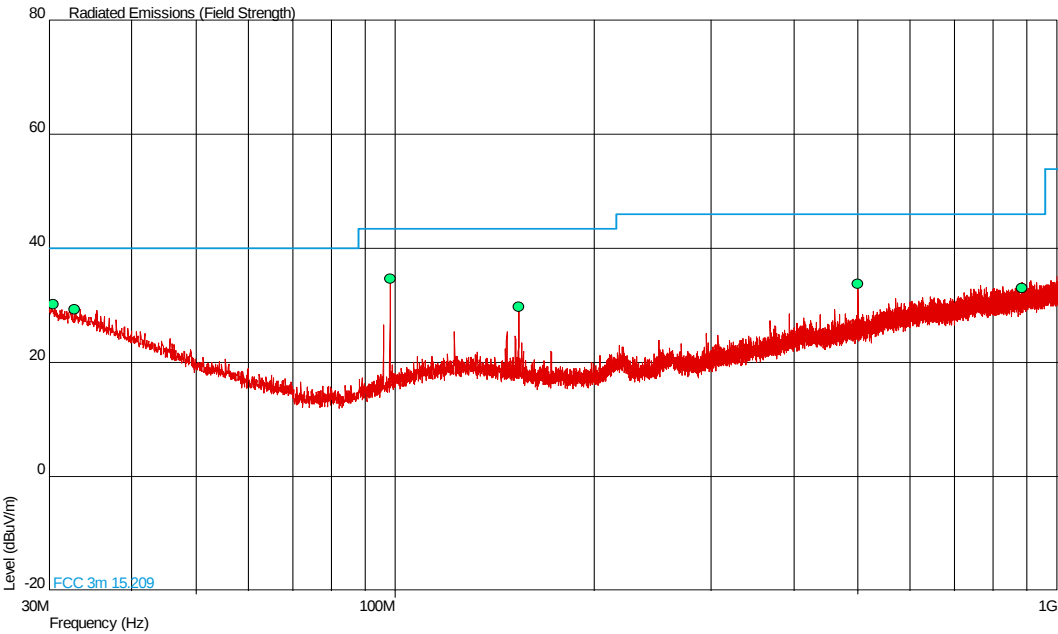

Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.414	30.2	32.4	40.0	100	-9.8	67.6	292	2.28	Vertical
32.762	29.4	29.5	40.0	100	-10.6	70.5	304	1.00	Vertical
98.304	34.7	54.3	43.5	150	-8.8	95.7	244	1.00	Vertical
153.611	29.7	30.5	43.5	150	-13.8	119.5	86	1.00	Vertical
500.029	33.8	49.0	46.0	200	-12.2	151.0	174	1.00	Vertical
883.622	33.0	44.7	46.0	200	-13.0	155.3	43	1.00	Vertical




Product Service

1GHz to 40GHz


Frequency (GHz)	Antenna Polarisation	Antenna Height (cm)	EUT Arc (degrees)	Final Peak (dBµV/m)	Final Average (dBµV/m)
7.466	Vertical	101	048	50.33	44.08

1 GHz to 7 GHz

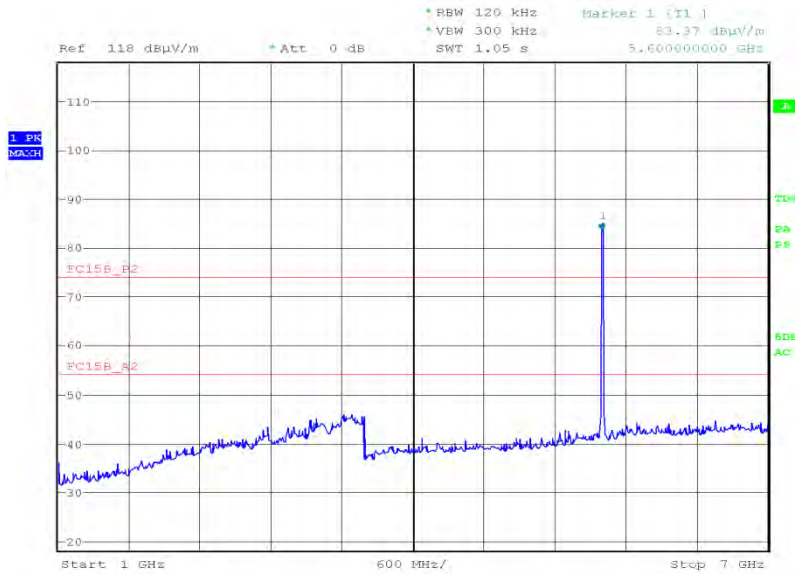

Date: 13.MAR.2012 21:48:56

7 GHz to 8 GHz

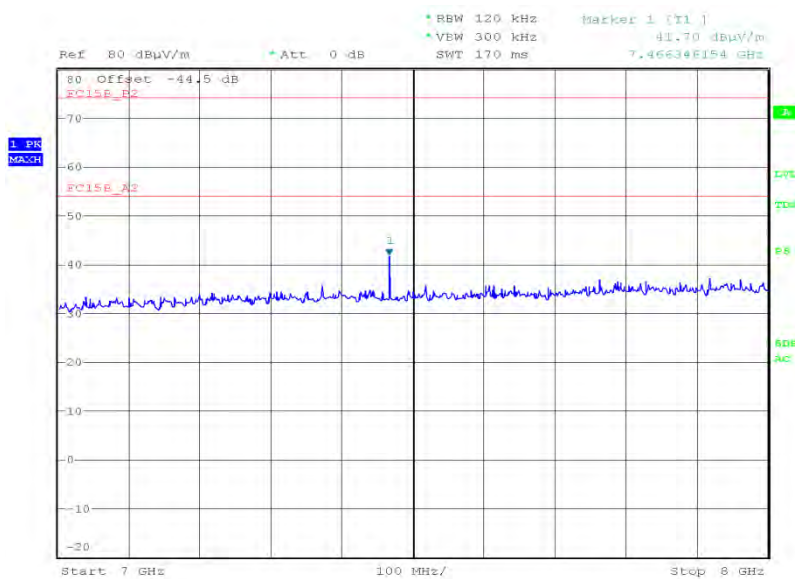


Date: 14.MAR.2012 20:08:08




Product Service

8 GHz to 18 GHz

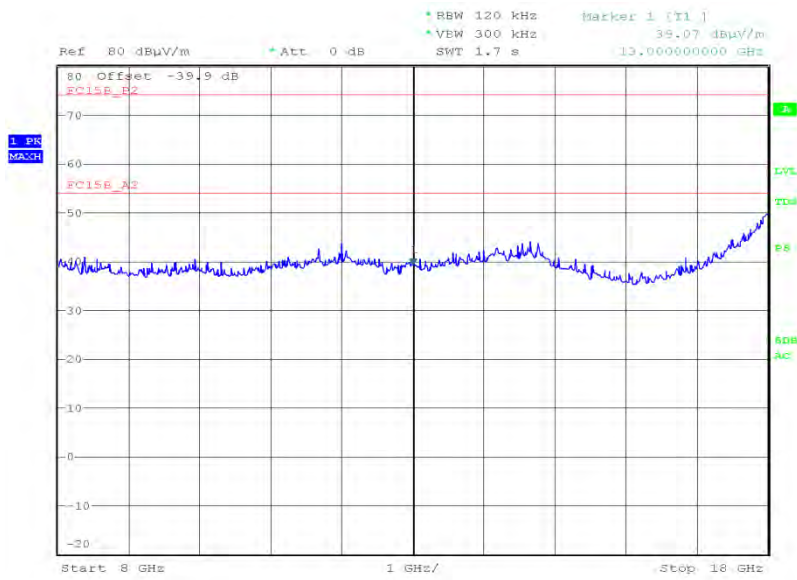

Date: 14.MAR.2012 23:15:37

18 GHz to 40 GHz

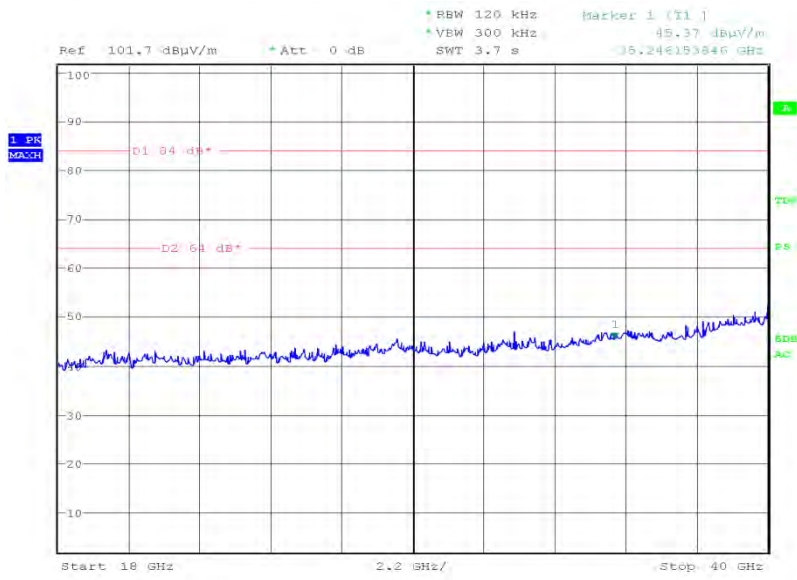


Date: 3.APR.2012 22:39:17



Product Service

5700 MHz

30 MHz to 1 GHz

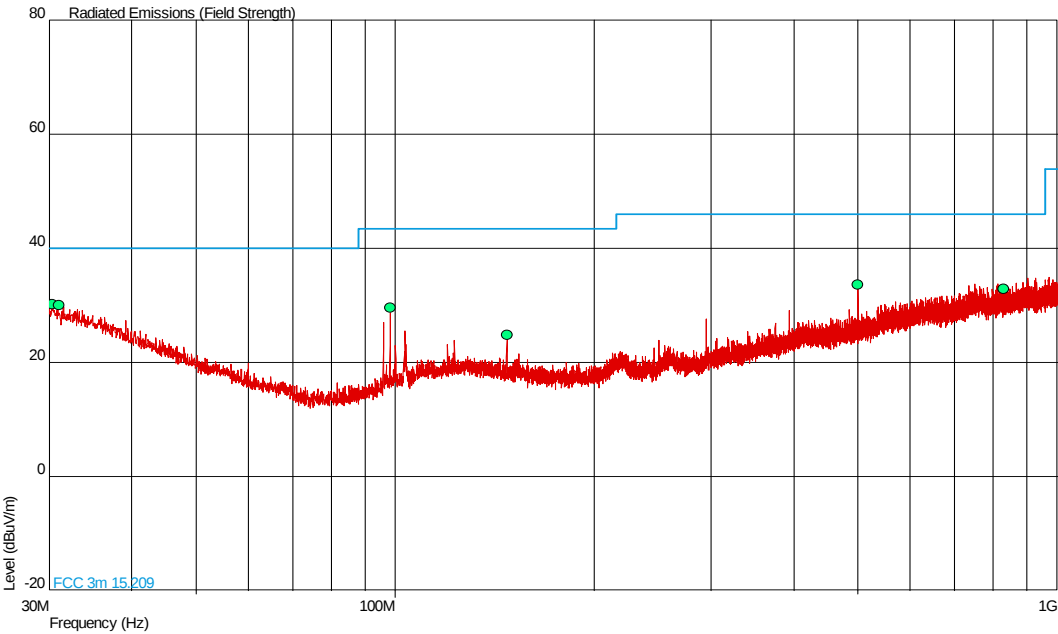

Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.369	30.2	32.4	40.0	100	-9.8	67.6	360	1.00	Vertical
31.064	30.0	31.6	40.0	100	-10.0	68.4	44	2.03	Vertical
98.298	29.6	30.2	43.5	150	-13.9	119.8	270	1.00	Vertical
147.454	24.8	17.4	43.5	150	-18.7	132.6	52	1.00	Vertical
500.054	33.7	48.4	46.0	200	-12.3	151.6	187	1.18	Vertical
828.963	32.9	44.2	46.0	200	-13.1	155.8	0	1.00	Vertical




Product Service

1GHz to 40GHz


Frequency (GHz)	Antenna Polarisation	Antenna Height (cm)	EUT Arc (degrees)	Final Peak (dBµV/m)	Final Average (dBµV/m)
7.600	Vertical	100	066	48.13	38.25

1 GHz to 7 GHz

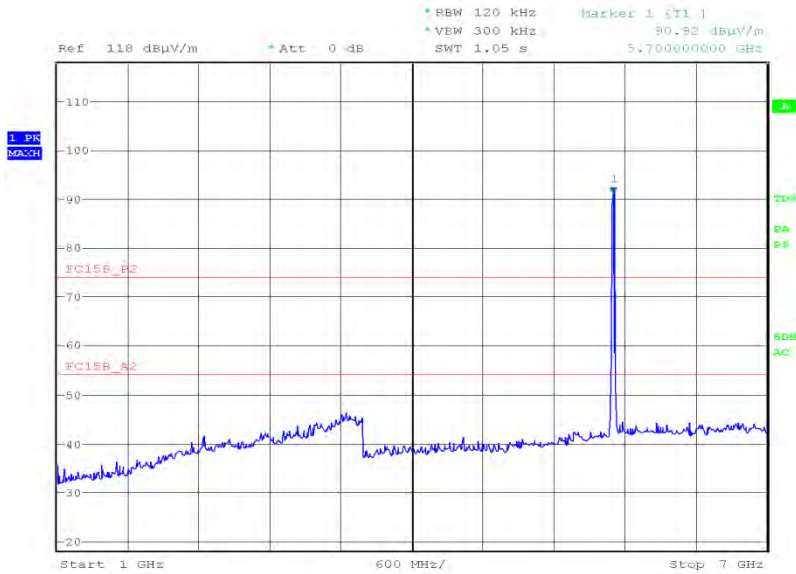

Date: 13.MAR.2012 21:50:43

7 GHz to 8 GHz

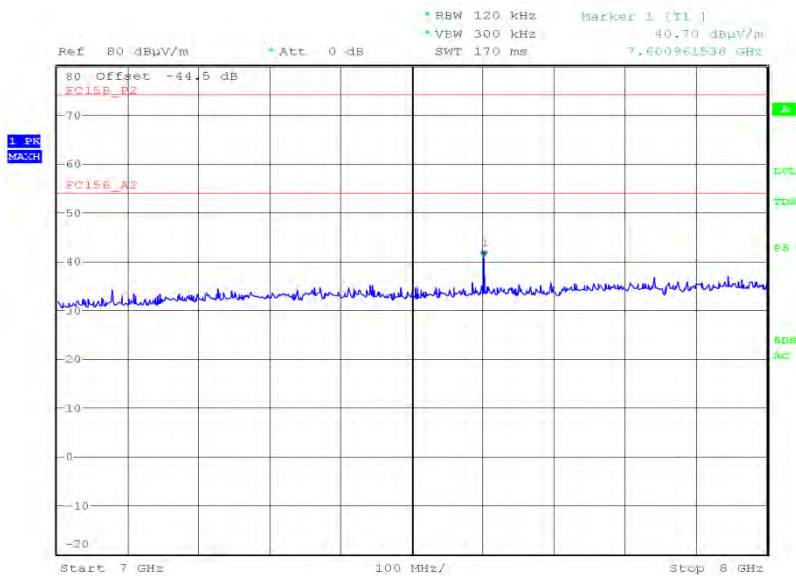


Date: 14.MAR.2012 20:25:05




Product Service

8 GHz to 18 GHz

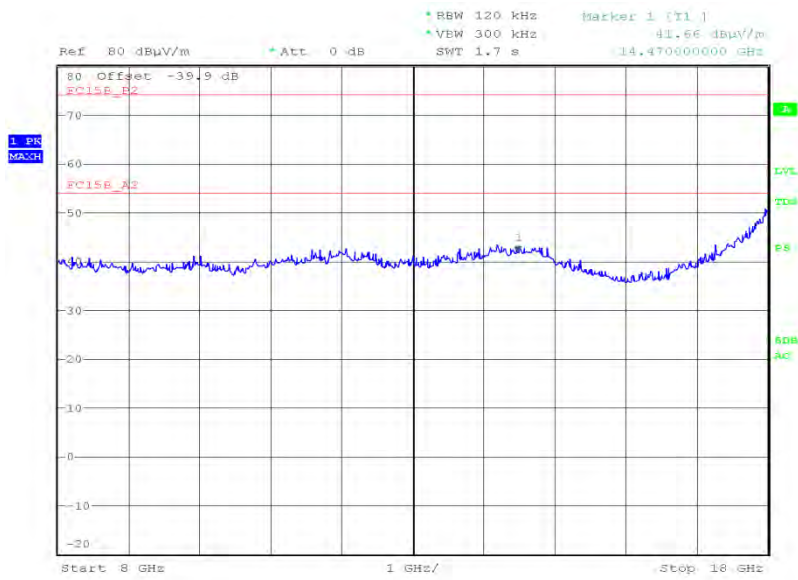

Date: 14.MAR.2012 22:44:56


18 GHz to 40 GHz

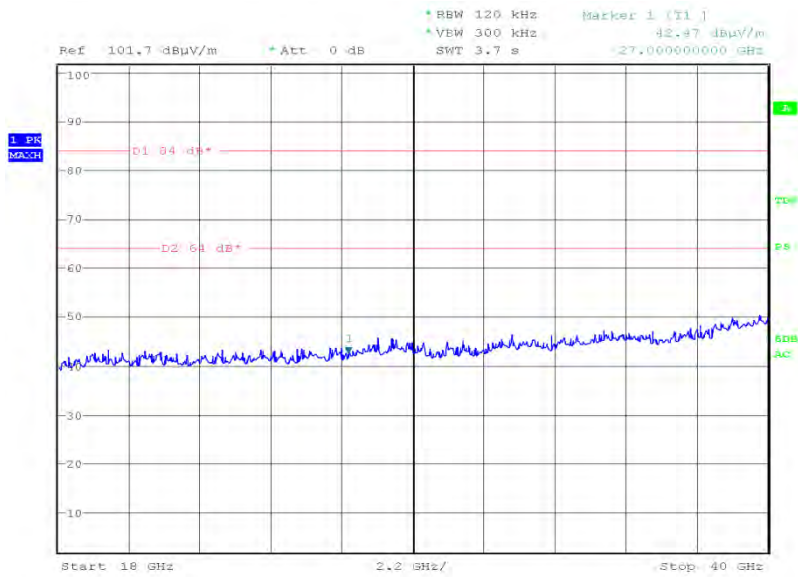

Date: 3.APR.2012 22:49:31



Product Service

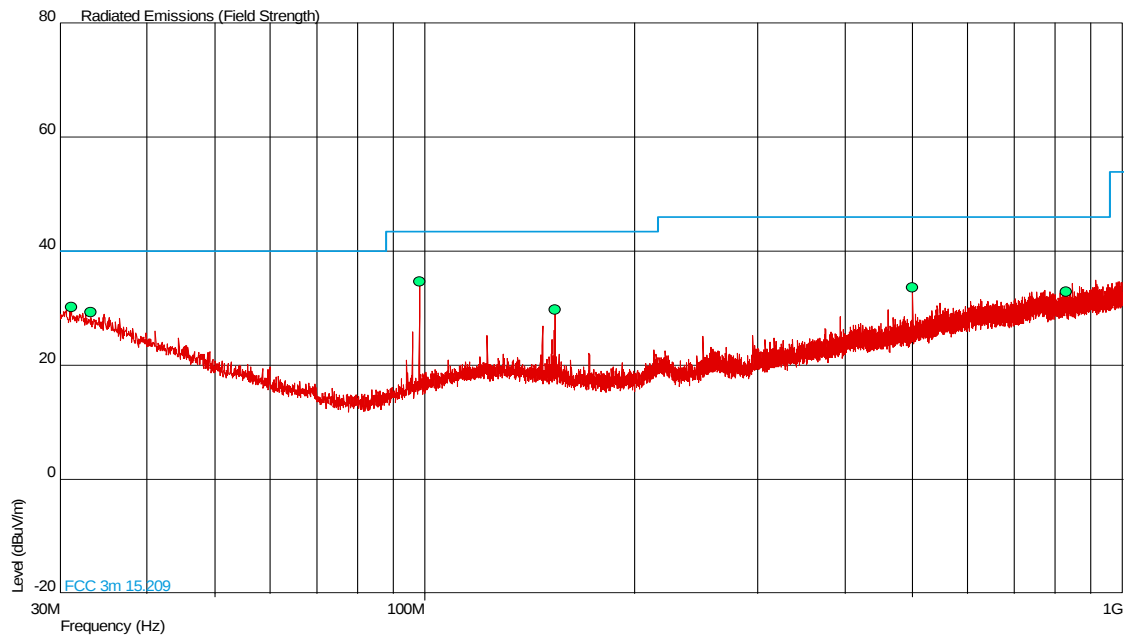
Frequency Band 45745 MHz30 MHz to 1 GHz

Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
31.213	30.2	32.4	40.0	100	-9.8	67.6	7	1.00	Vertical
33.202	29.3	29.2	40.0	100	-10.7	70.8	258	1.00	Vertical
98.297	34.7	54.3	43.5	150	-8.8	95.7	262	1.08	Vertical
153.603	29.8	30.9	43.5	150	-13.7	119.1	88	1.00	Vertical
500.030	33.7	48.4	46.0	200	-12.3	151.6	356	1.03	Vertical
829.399	32.9	44.2	46.0	200	-13.1	155.8	282	1.00	Vertical




Product Service

1 GHz to 7 GHz

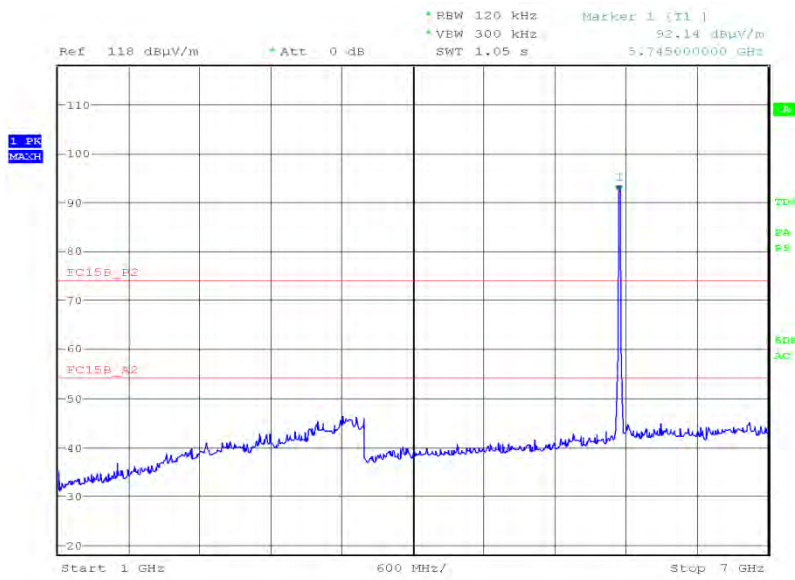

Date: 13.MAR.2012 23:11:50

7 GHz to 8 GHz

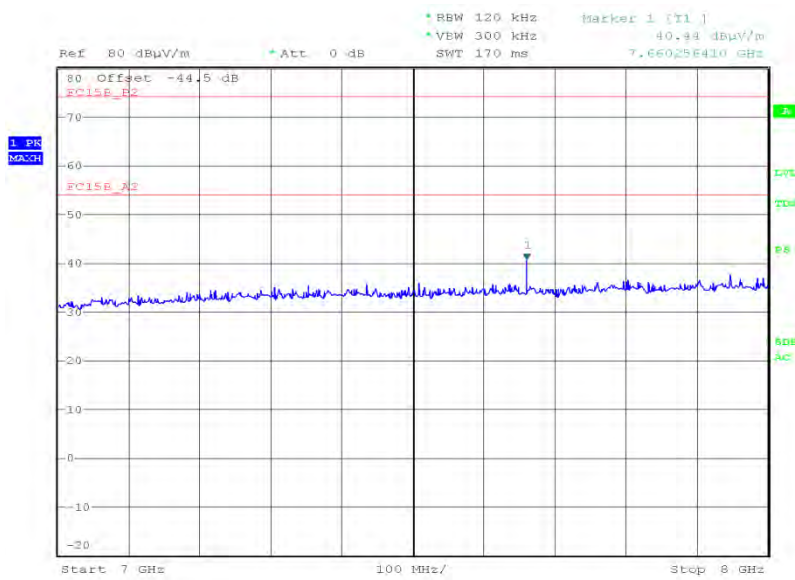


Date: 14.MAR.2012 20:34:30




Product Service

8 GHz to 18 GHz

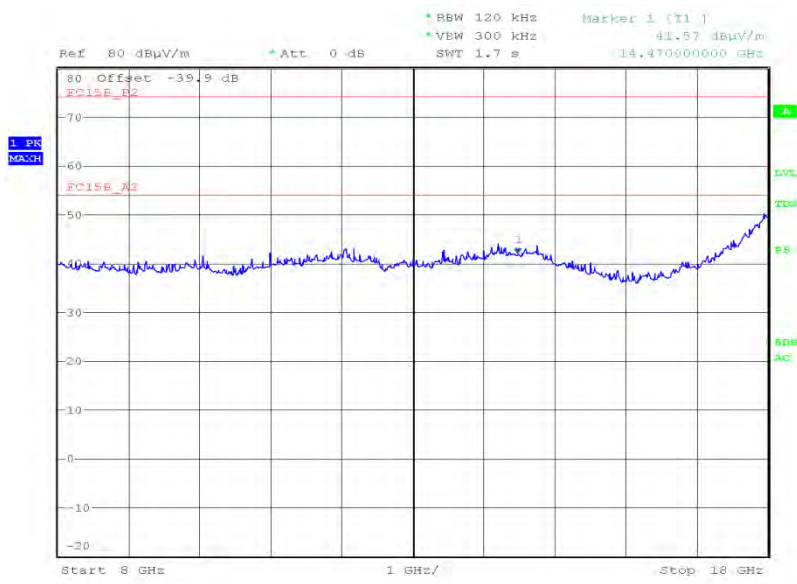

Date: 14.MAR.2012 22:24:45

18 GHz to 40 GHz

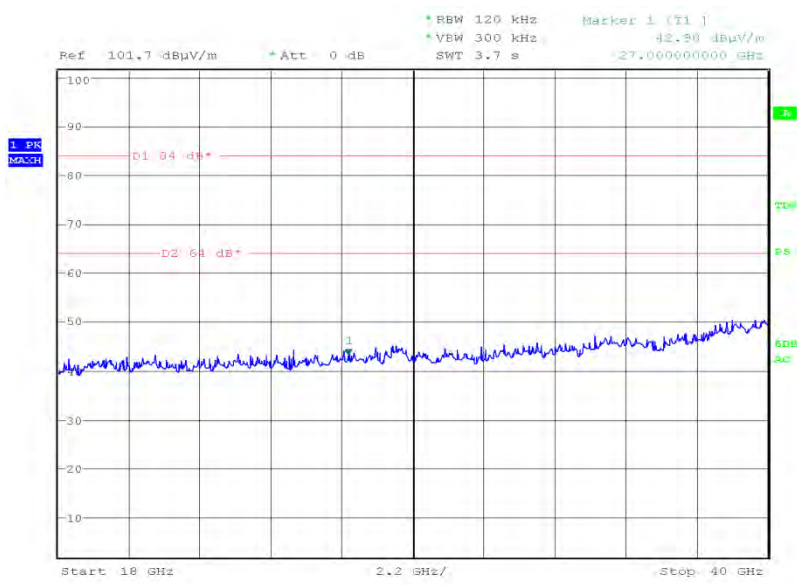


Date: 3.APR.2012 22:56:34



Product Service

5785 MHz


30 MHz to 1 GHz

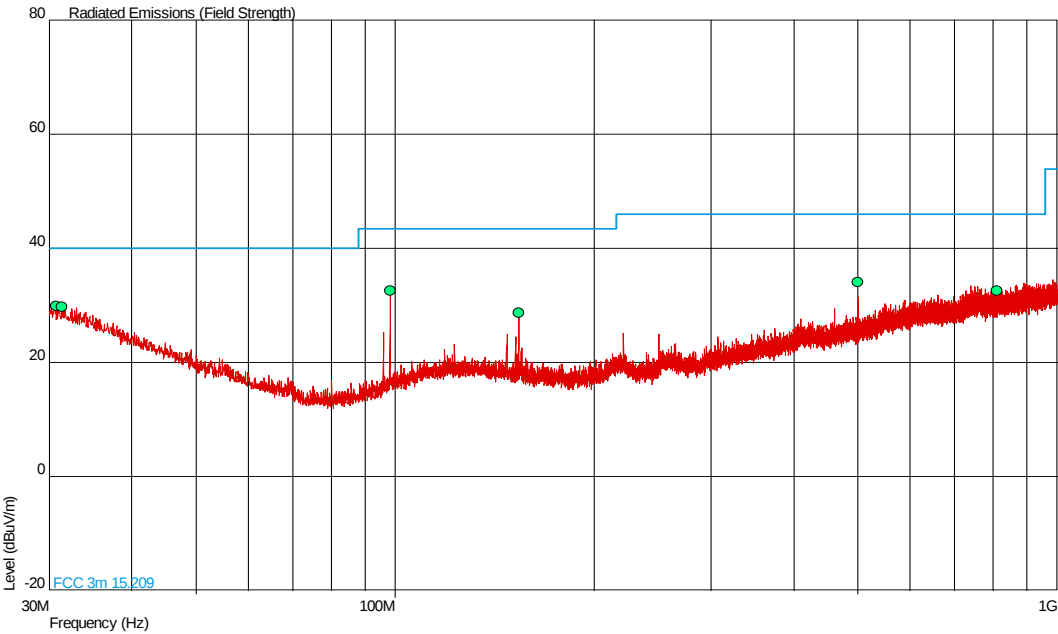


Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.743	30.0	31.6	40.0	100	-10.0	68.4	357	1.00	Vertical
31.365	29.8	30.9	40.0	100	-10.2	69.1	79	1.00	Vertical
98.296	32.6	42.7	43.5	150	-10.9	107.0	8	1.00	Vertical
153.598	28.7	27.2	43.5	150	-14.8	122.4	88	1.97	Vertical
500.038	34.1	50.7	46.0	200	-11.9	148.8	153	1.68	Vertical
811.724	32.6	42.7	46.0	200	-13.4	156.9	170	1.25	Vertical



Product Service

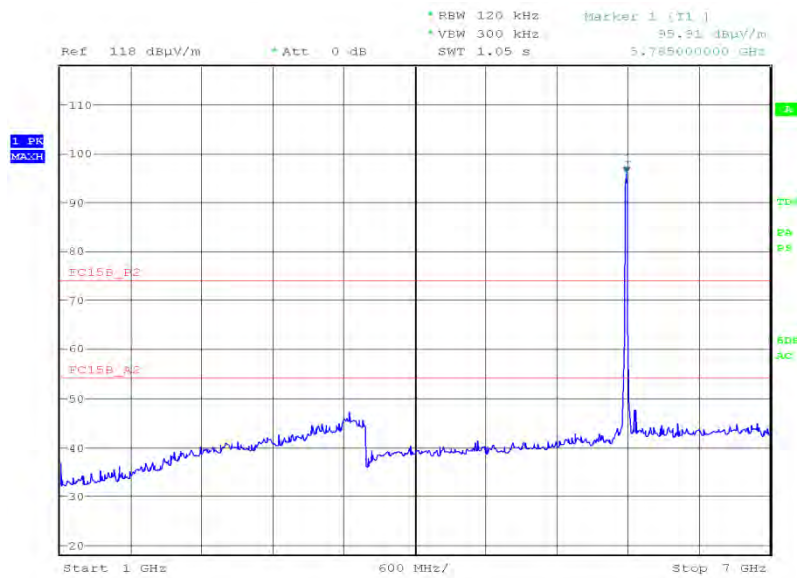1 GHz to 7 GHz


Date: 13.MAR.2012 22:19:46

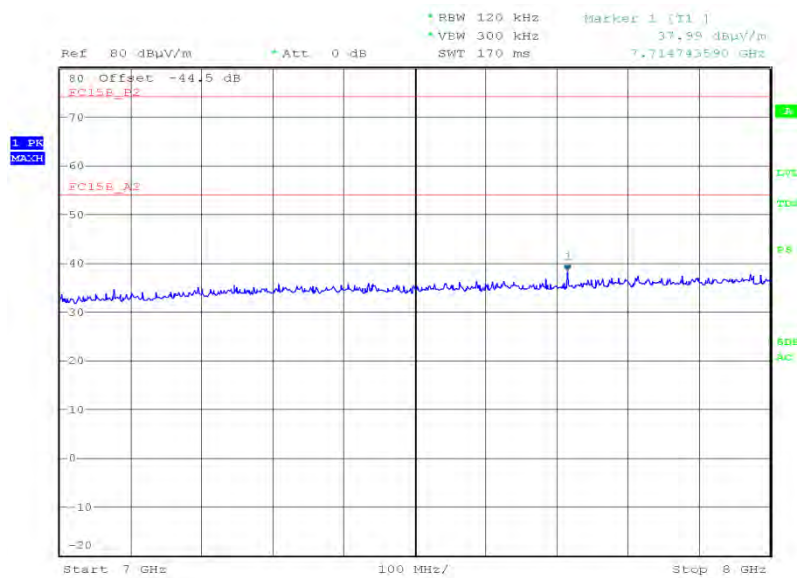7 GHz to 8 GHz


Date: 14.MAR.2012 21:02:32



Product Service

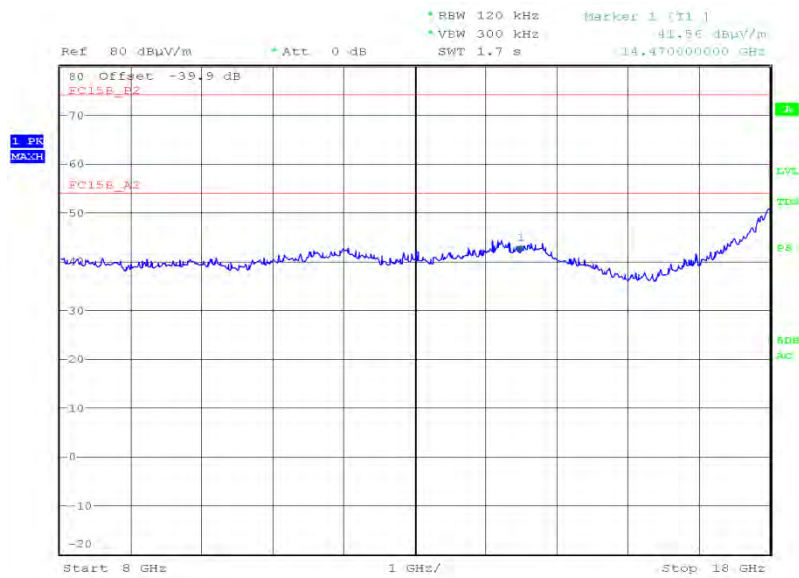8 GHz to 18 GHz

Date: 14.MAR.2012 22:11:49

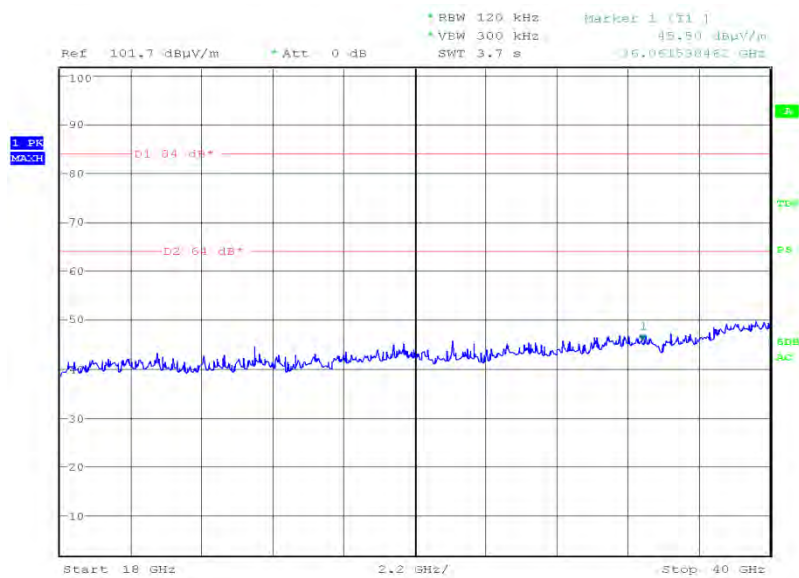18 GHz to 40 GHz


Date: 3.APR.2012 23:05:09



Product Service

5805 MHz

30 MHz to 1 GHz

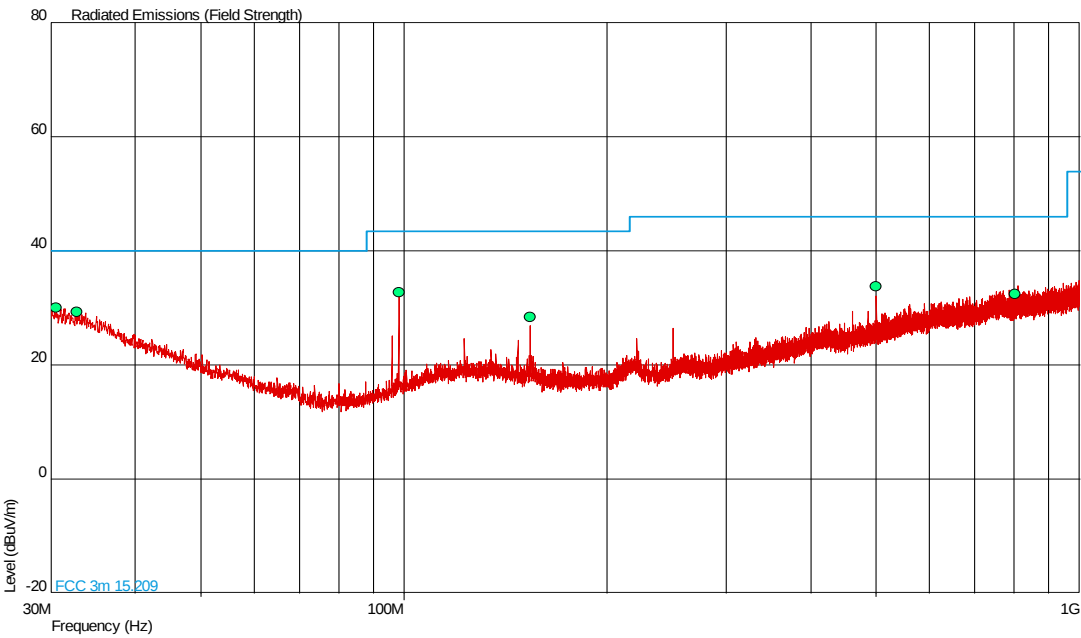


Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.526	30.1	32.0	40.0	100	-9.9	68.0	95	1.00	Vertical
32.759	29.3	29.2	40.0	100	-10.7	70.8	165	1.00	Vertical
98.304	32.8	43.7	43.5	150	-10.7	106.3	360	1.00	Vertical
153.615	28.4	26.3	43.5	150	-15.1	123.7	107	1.70	Vertical
500.062	33.8	49.0	46.0	200	-12.2	151.0	167	1.69	Vertical
803.485	32.5	42.2	46.0	200	-13.5	157.8	359	1.00	Vertical




Product Service

1 GHz to 7 GHz

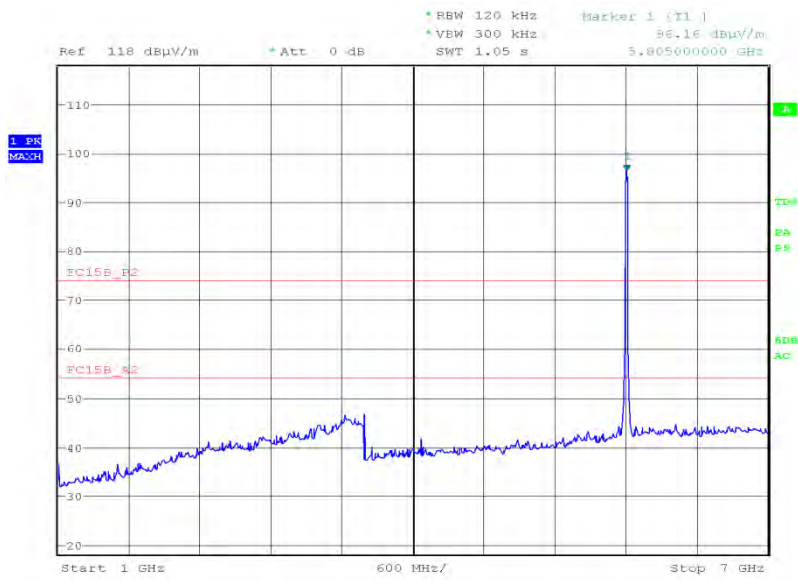

Date: 13.MAR.2012 22:40:20

7 GHz to 8 GHz

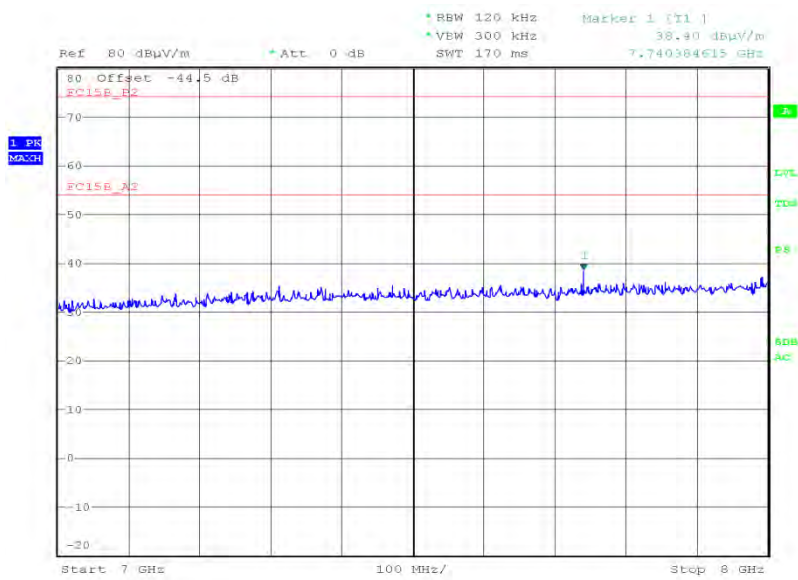


Date: 14.MAR.2012 21:08:22




Product Service

8 GHz to 18 GHz

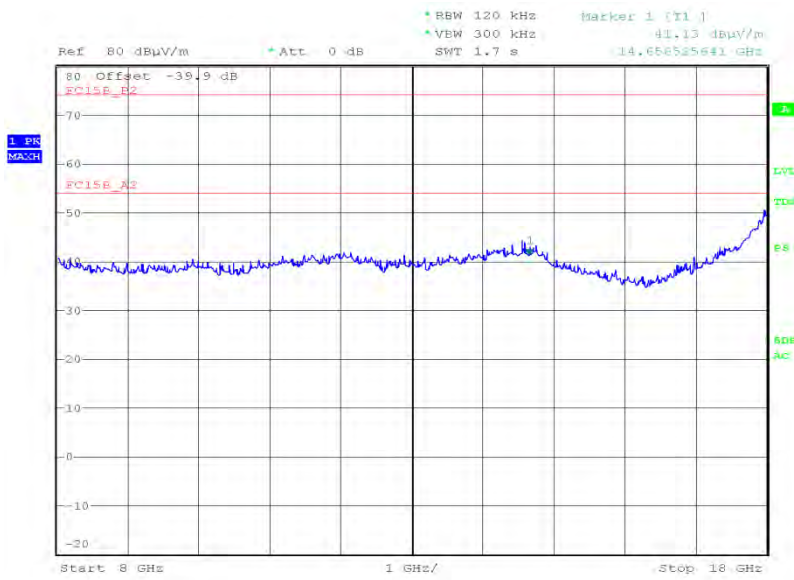

Date: 14.MAR.2012 21:53:52

18 GHz to 40 GHz

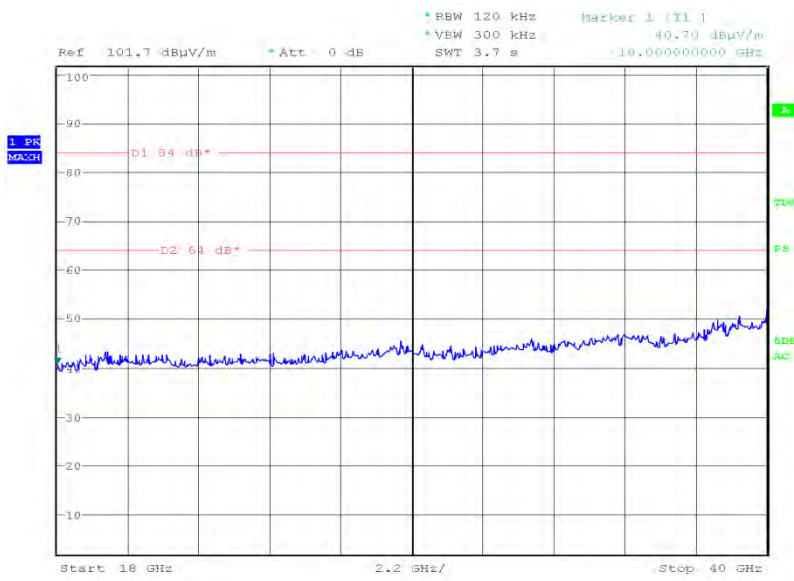

Date: 3.APR.2012 23:11:03

Limit

Peak (dBμV/m)	Average (dBμV/m)
74.0	54.0




Product Service

Band Edge Emissions

5180 MHz

Polarisation	Final Peak (dBμV/m)	Final Average (dBμV/m)
Horizontal	65.93	44.51

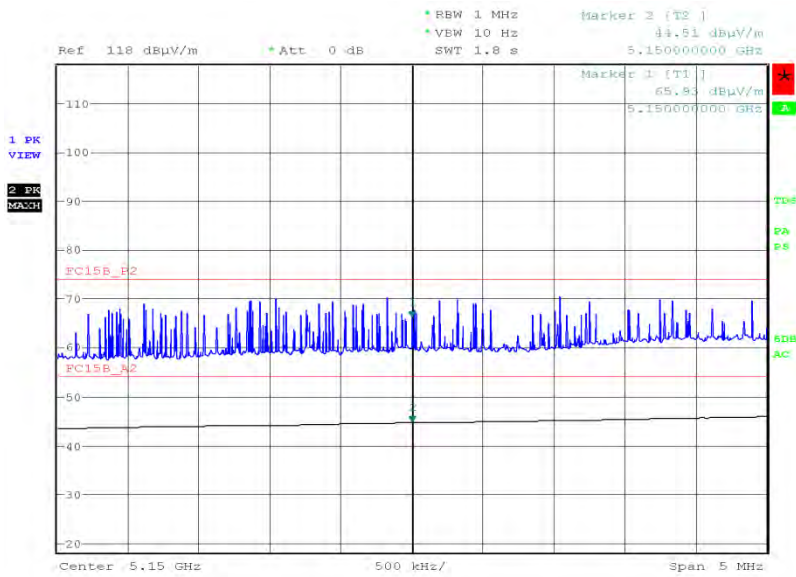


Date: 7.MAR.2012 17:58:11



Product Service

5320 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	59.97	44.91

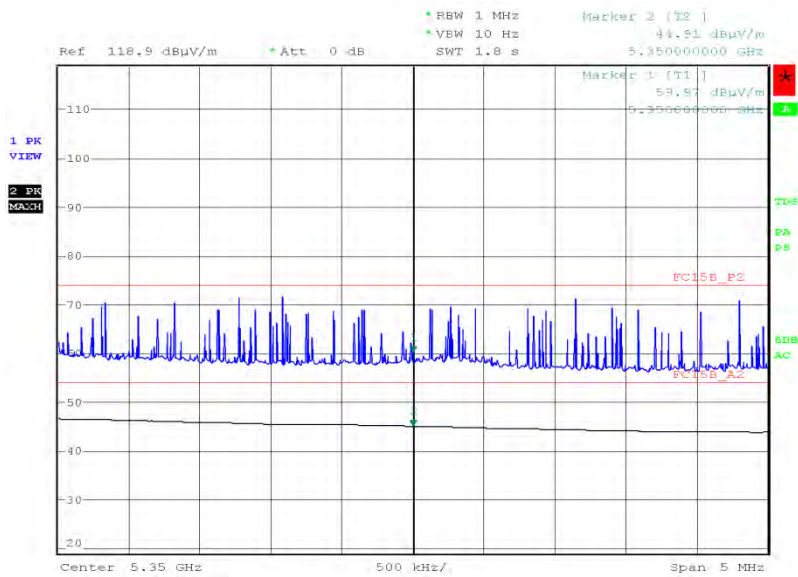


Date: 7.MAR.2012 18:26:39



Product Service

5500 MHz

Polarisation	Final Peak (dBμV/m)	Final Average (dBμV/m)
Horizontal	59.26	40.27

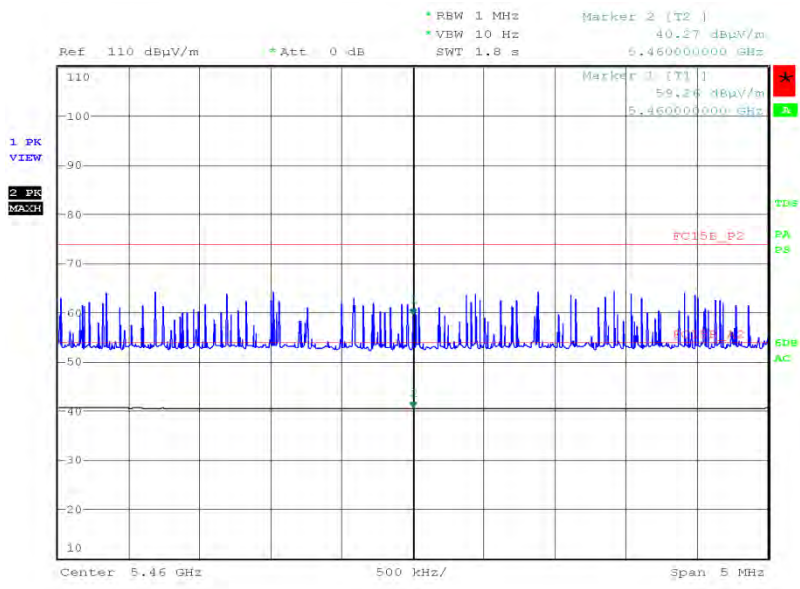

Date: 7.MAR.2012 18:40:34

Limit


Peak (dBμV/m)	Average (dBμV/m)
74.0	54.0



Product Service

802.11(n) - 5 GHz – Conducted


4V, 3.3V, 1.2V DC Supply

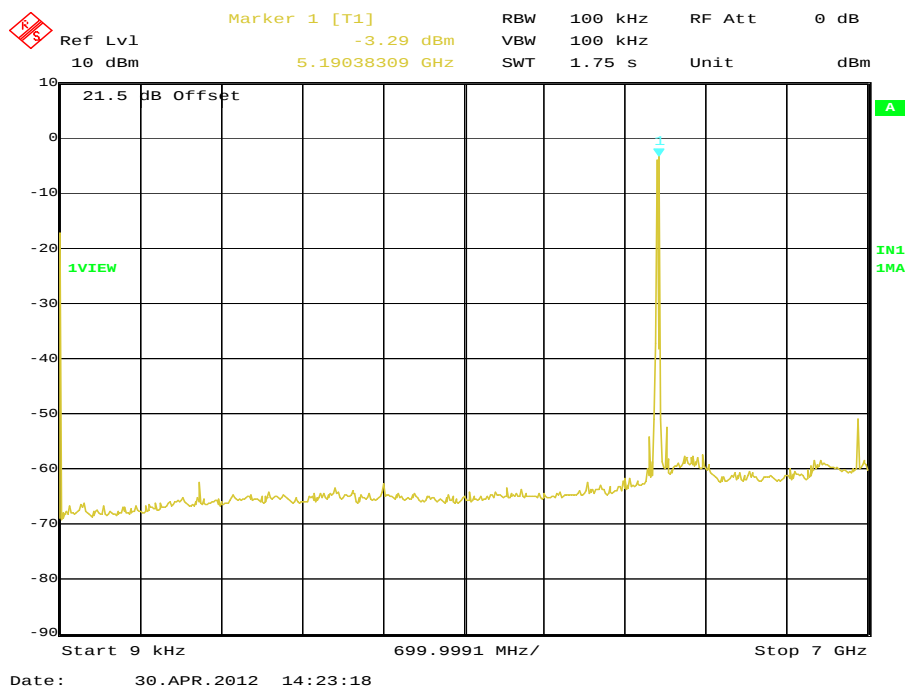Spurious Conducted EmissionsFrequency Band 121.70 Mbps5180 MHz9 kHz to 7 GHz




Product Service

7 GHz to 12 GHz

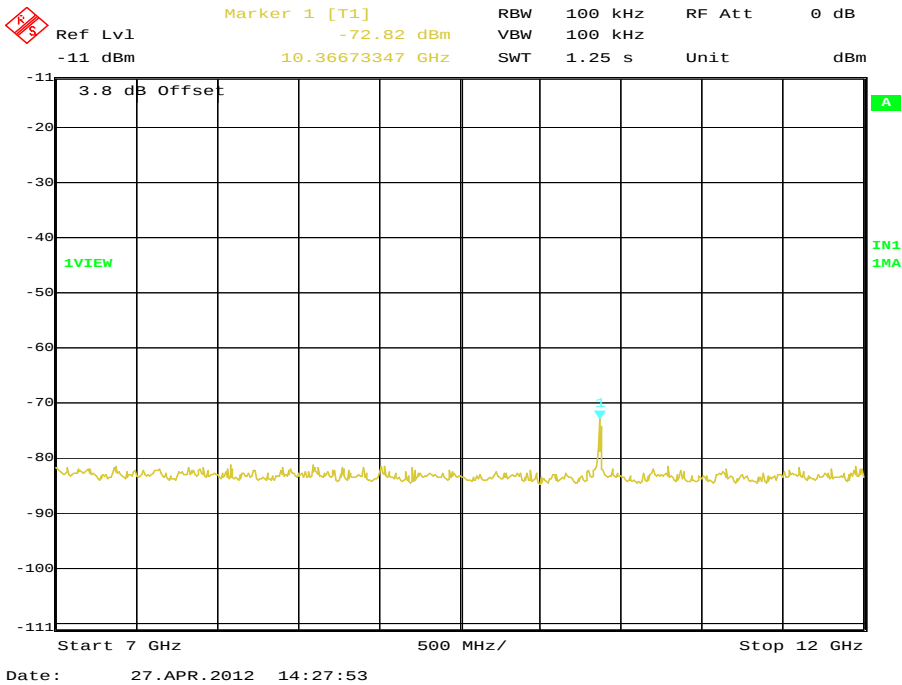


12 GHz to 18 GHz

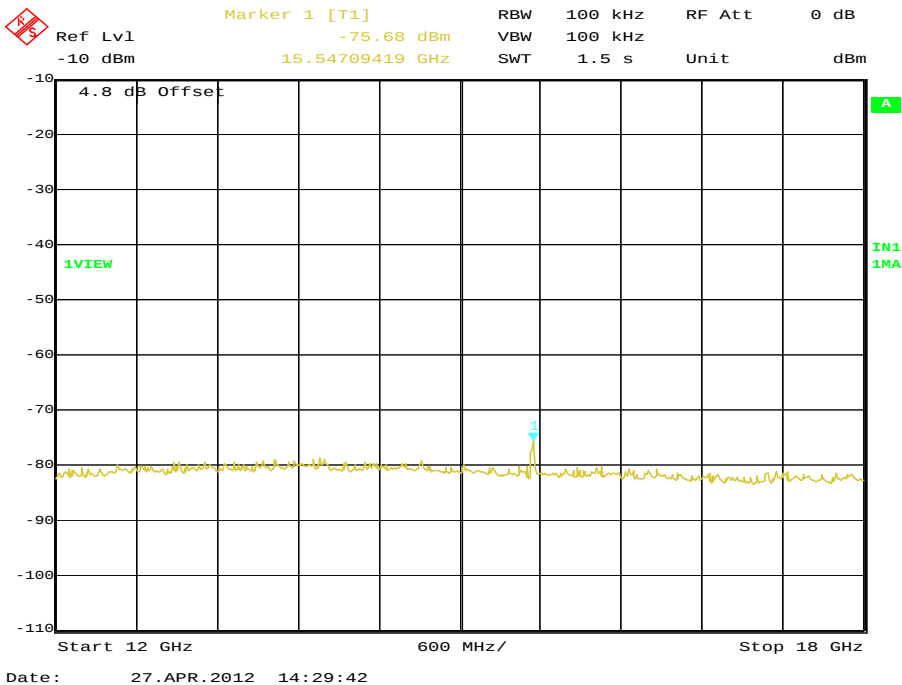




Product Service

18 GHz to 25 GHz

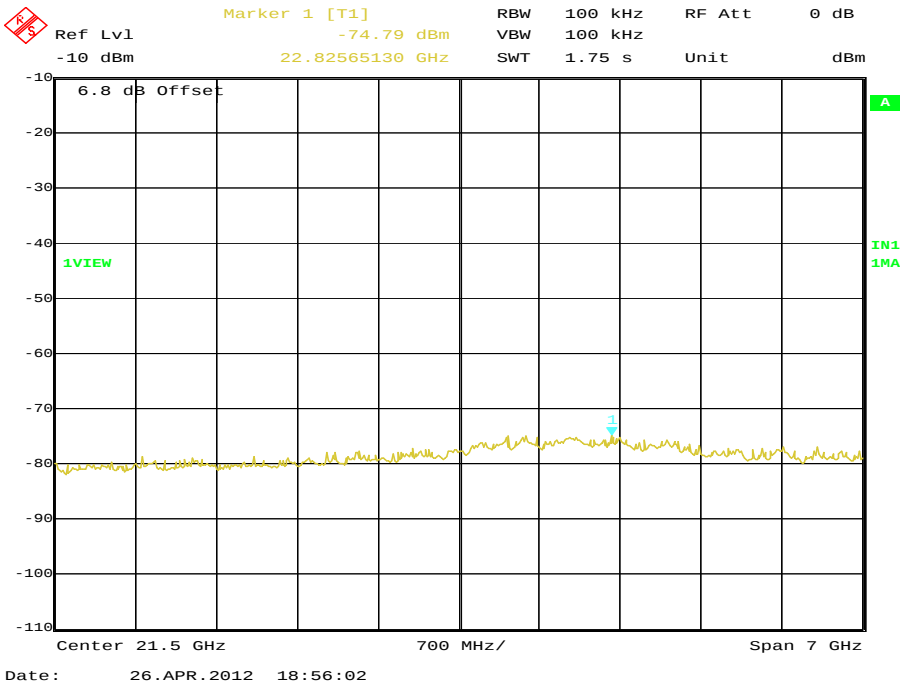


25 GHz to 40 GHz

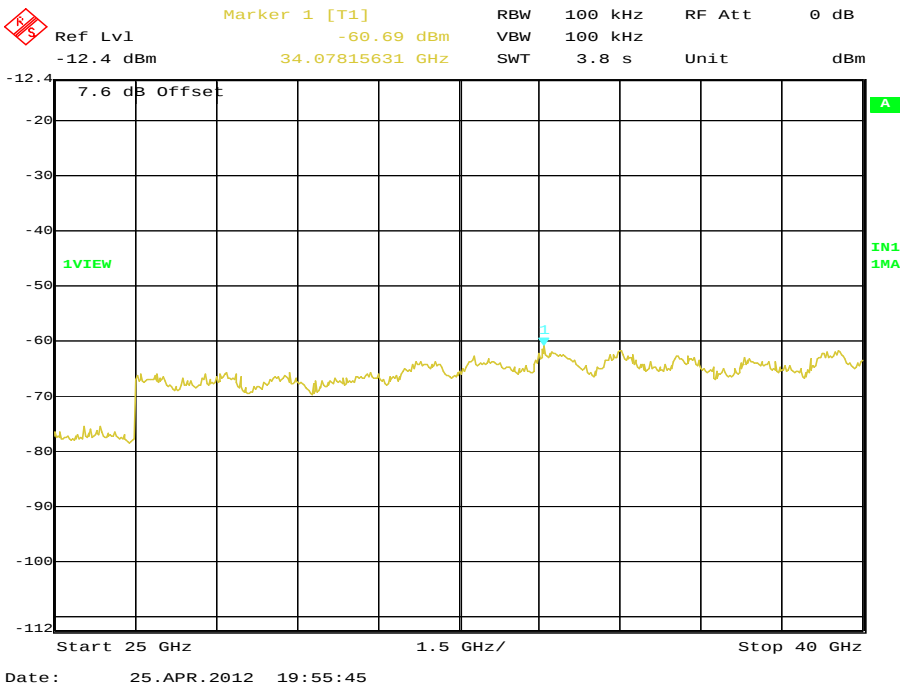




5220 MHz

9 kHz to 7 GHz

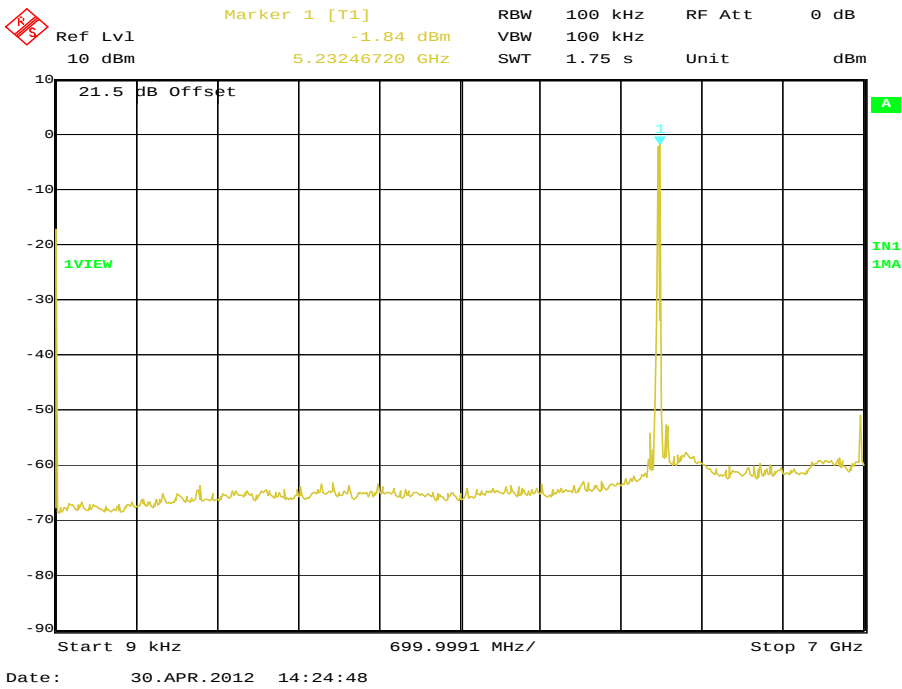


7 GHz to 12 GHz

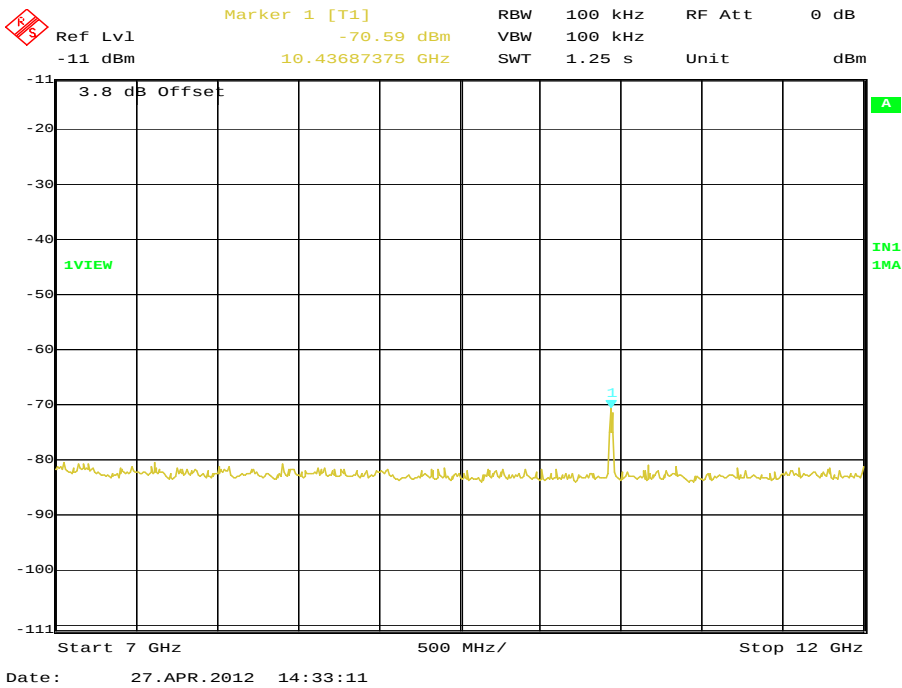




Product Service

12 GHz to 18 GHz

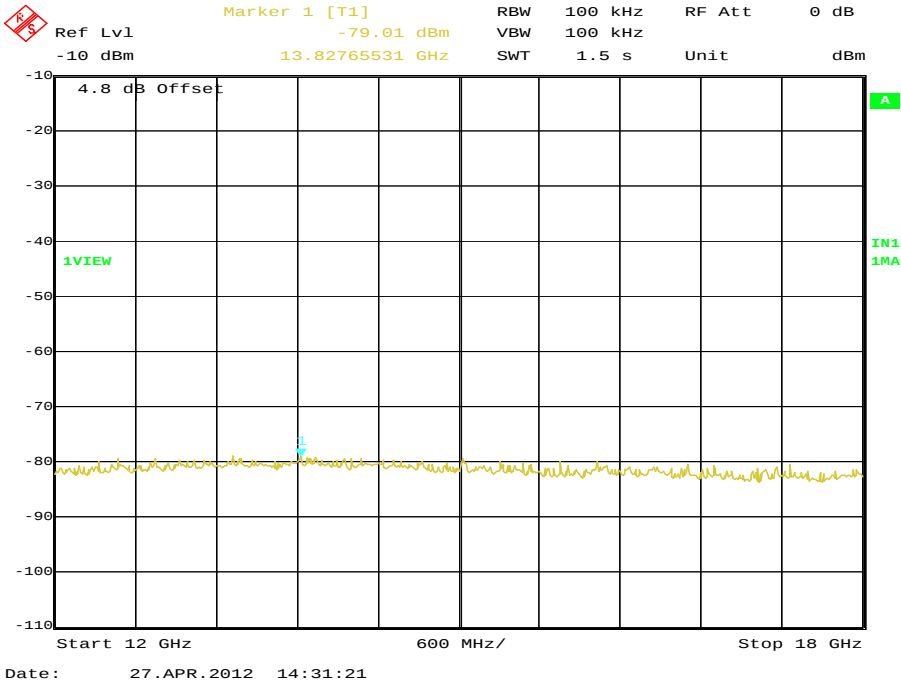


18 GHz to 25 GHz

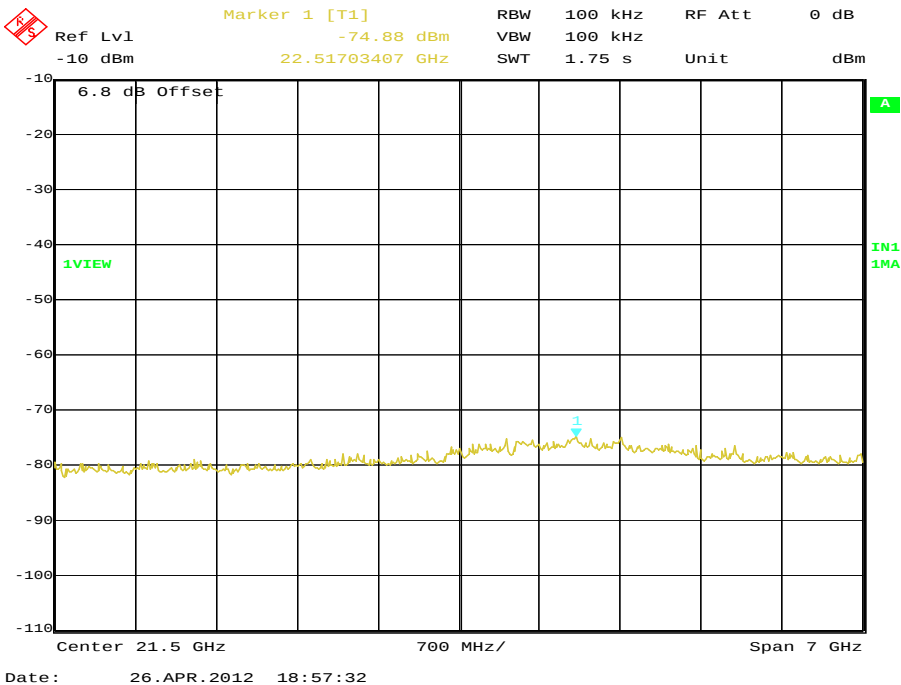




Product Service

25 GHz to 40 GHz

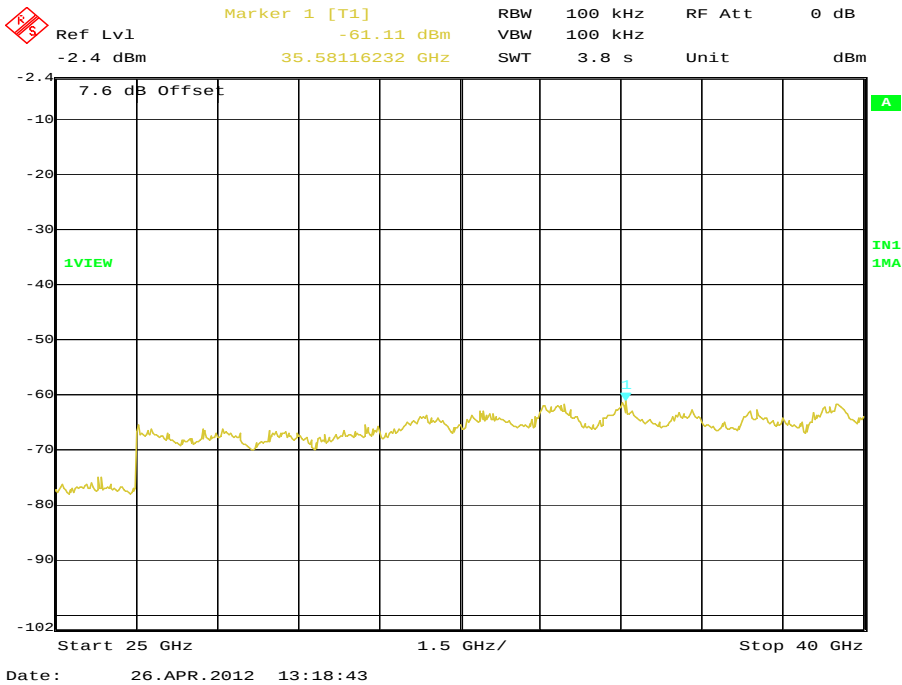

5240 MHz


9 kHz to 7 GHz

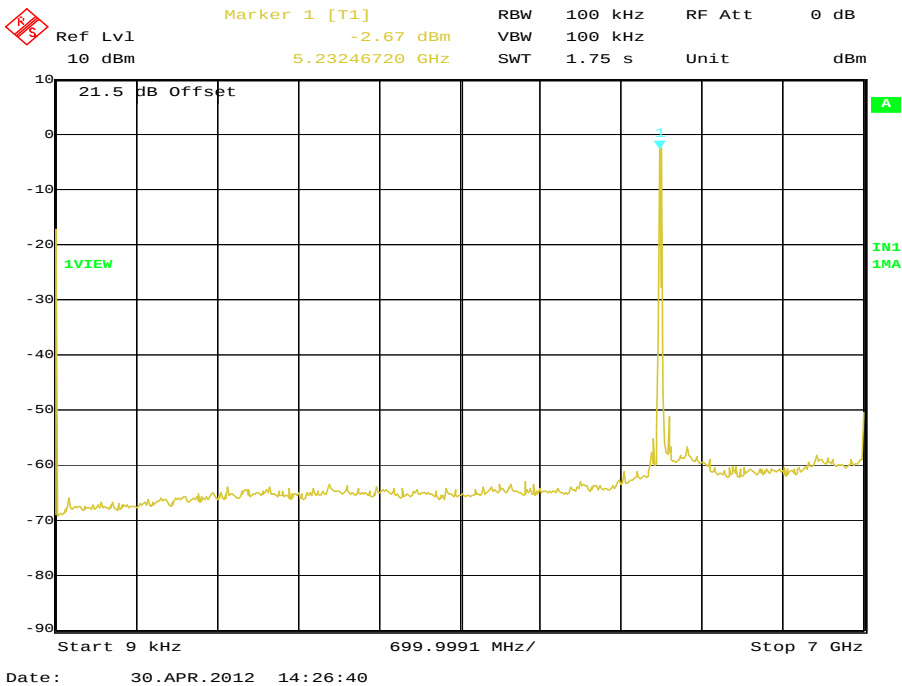




Product Service

7 GHz to 12 GHz

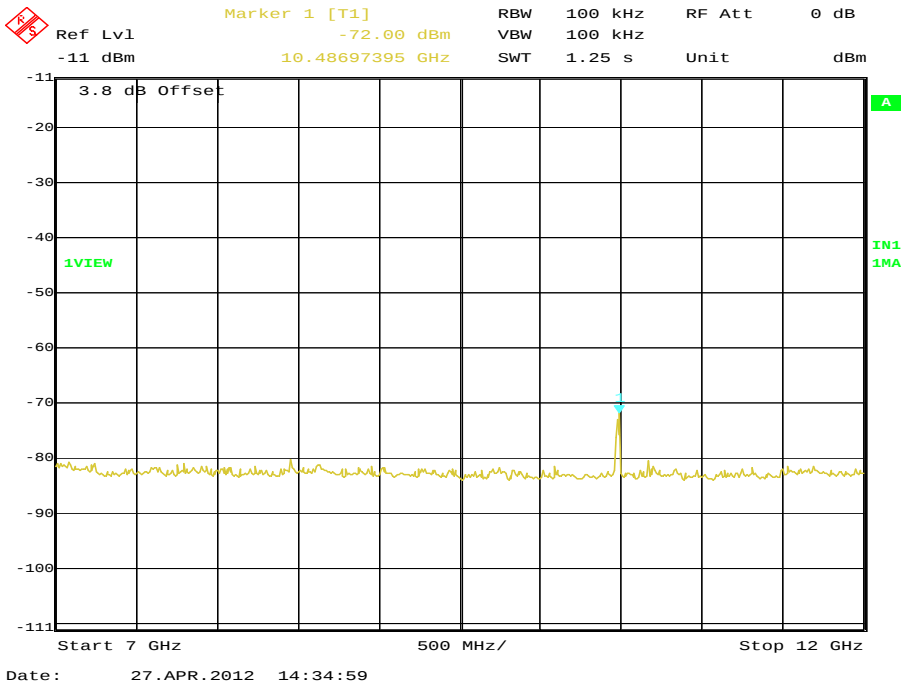


12 GHz to 18 GHz

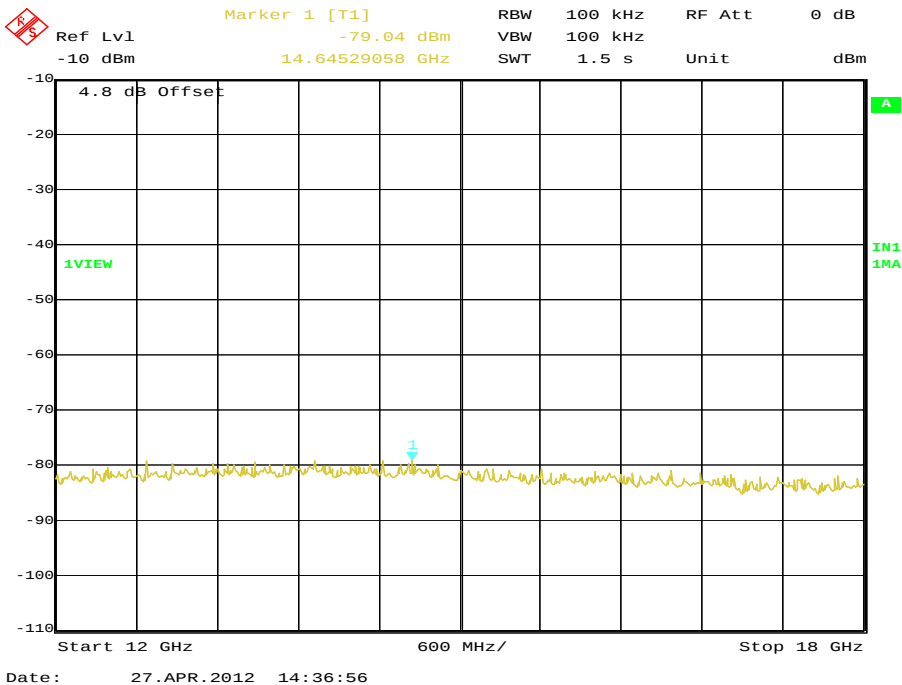




Product Service

18 GHz to 25 GHz

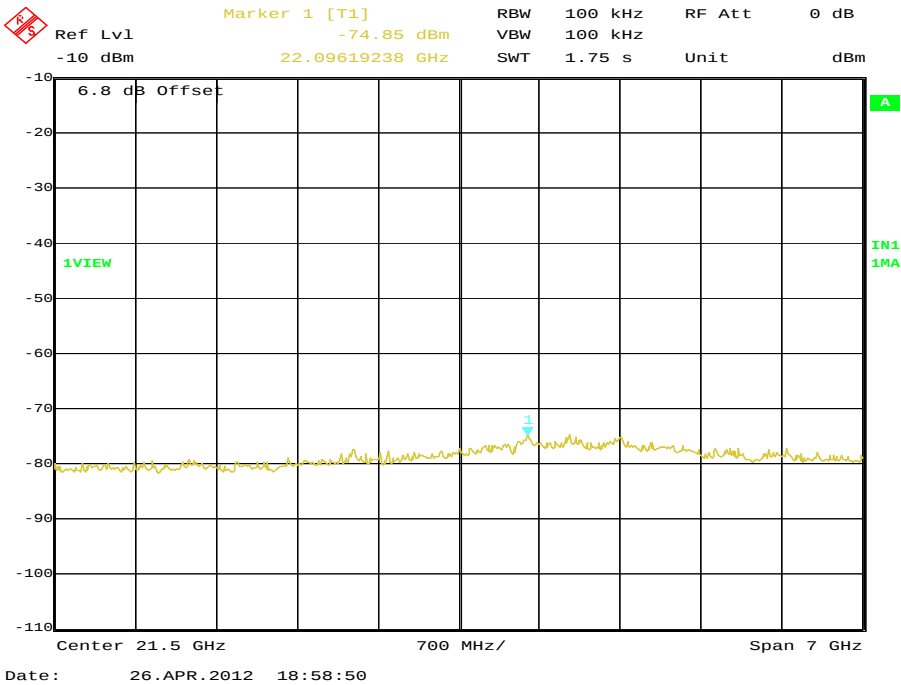

25 GHz to 40 GHz

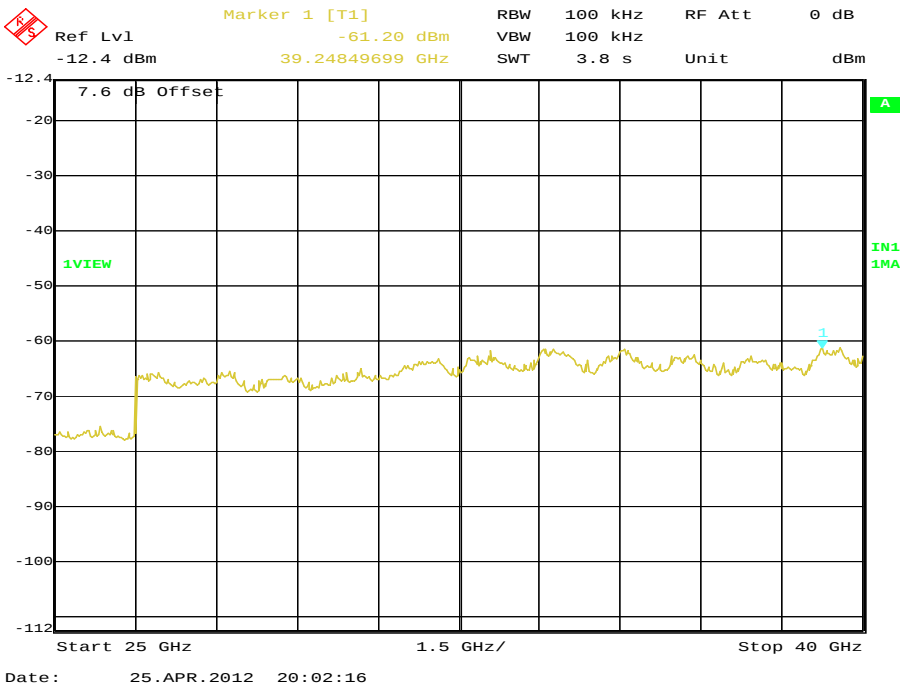




Product Service


Frequency Band 2

5260 MHz

9 kHz to 7 GHz

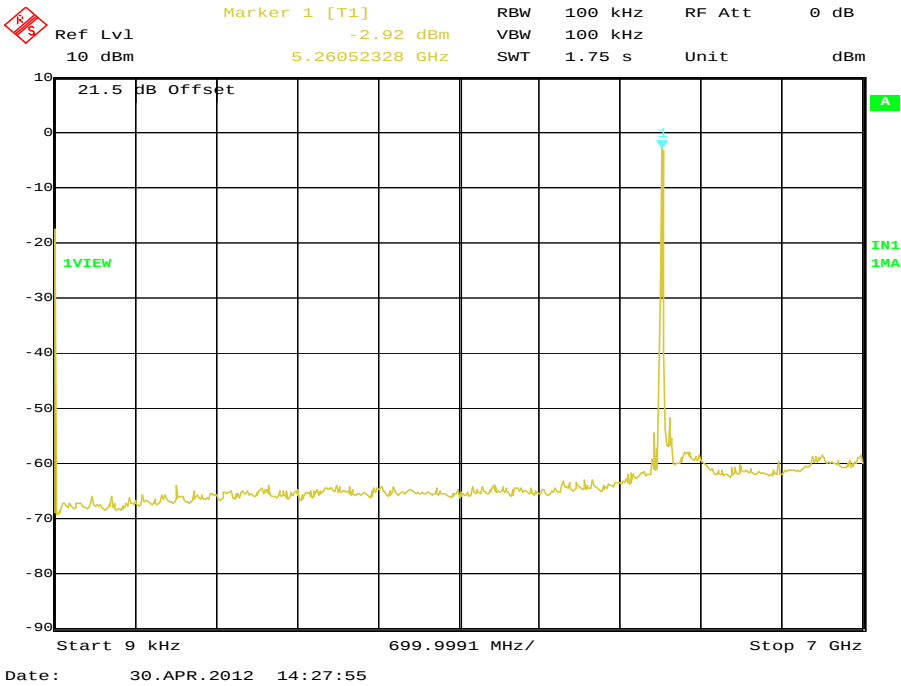


7 GHz to 12 GHz

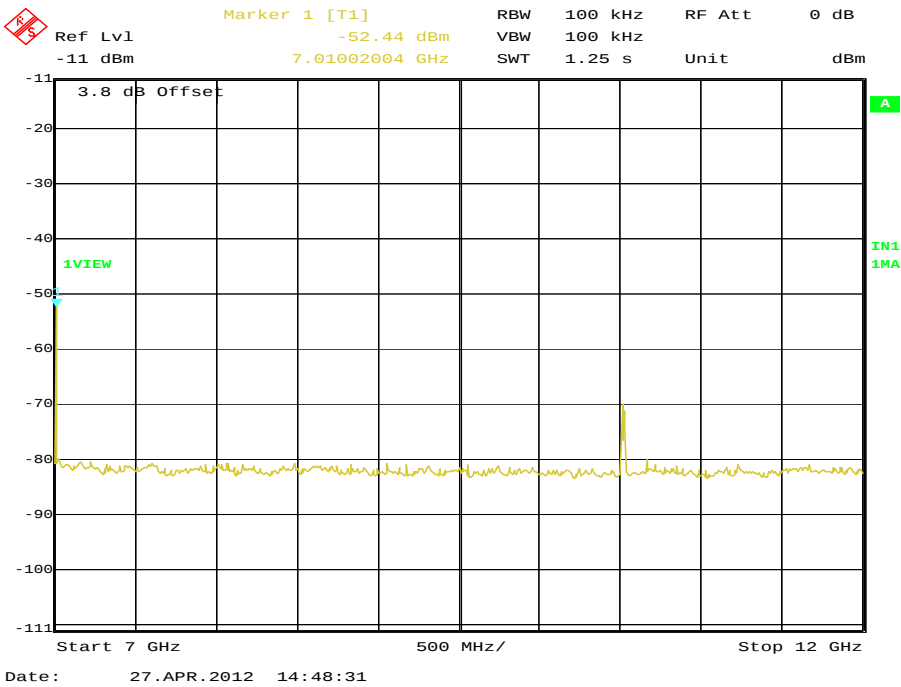




Product Service

12 GHz to 18 GHz

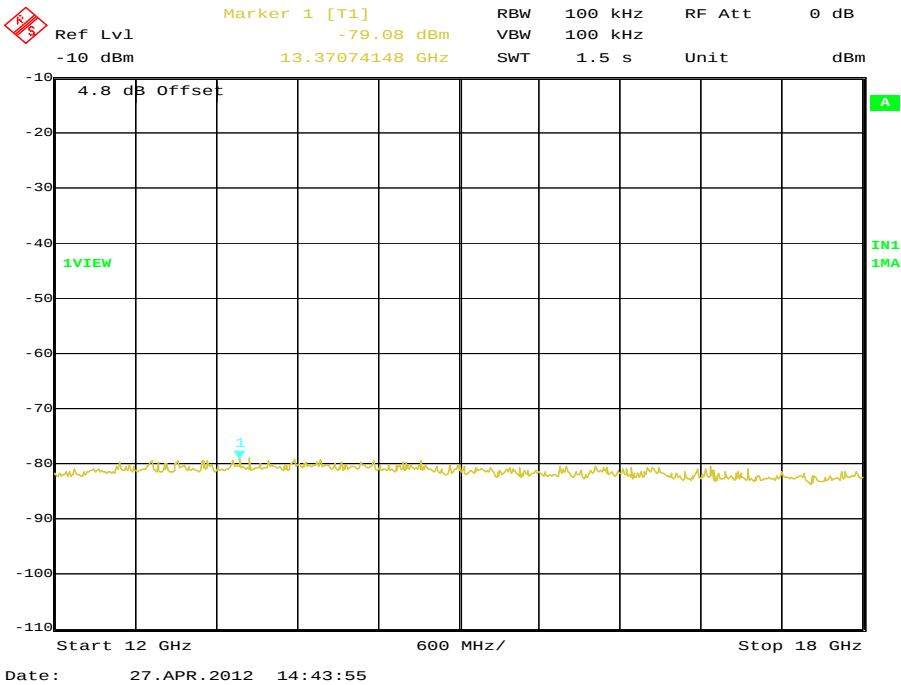


18 GHz to 25 GHz

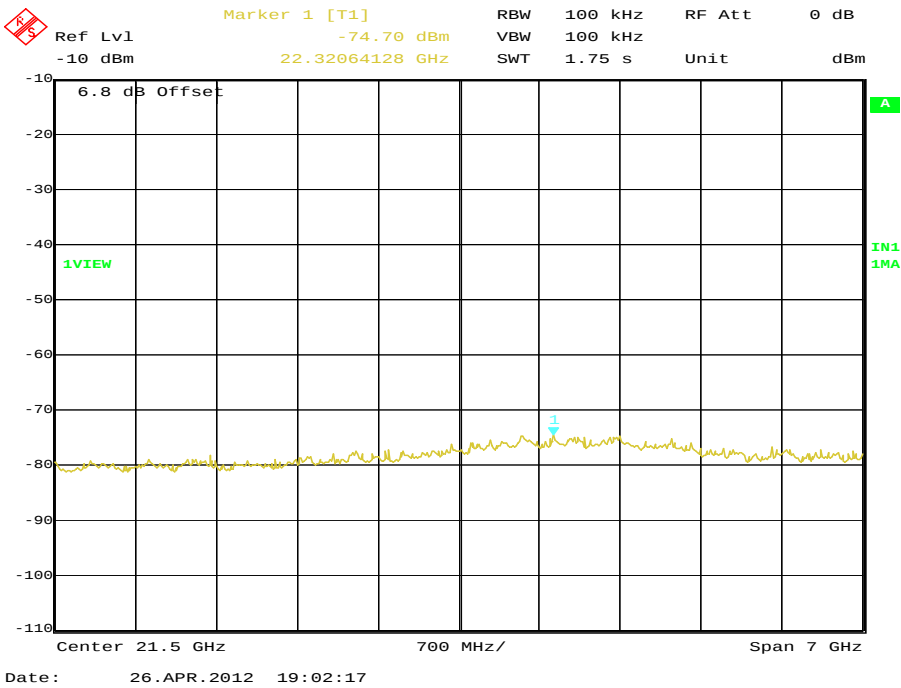




Product Service

25 GHz to 40 GHz

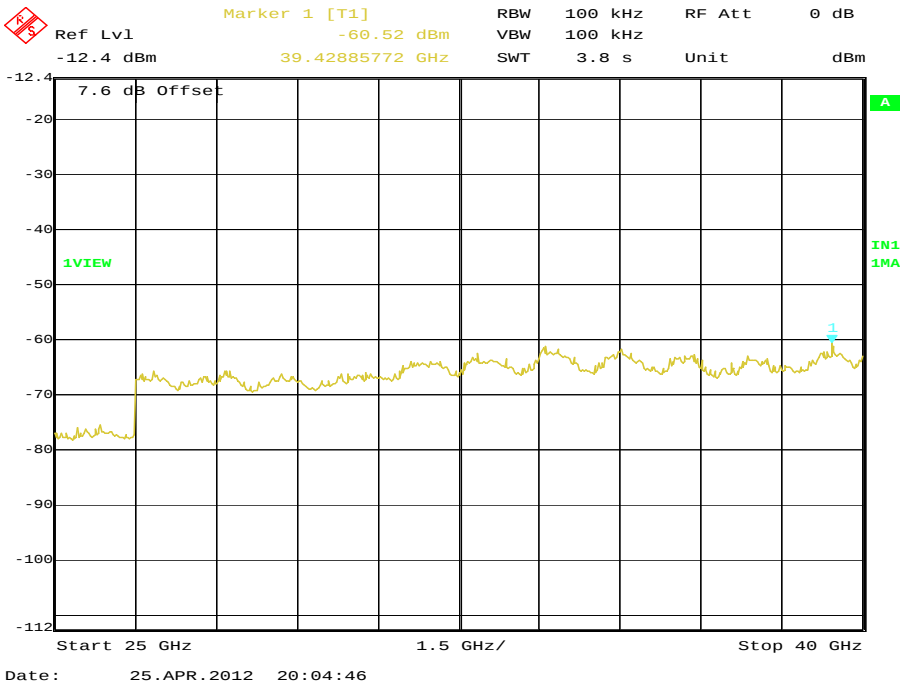

5300 MHz


9 kHz to 7 GHz

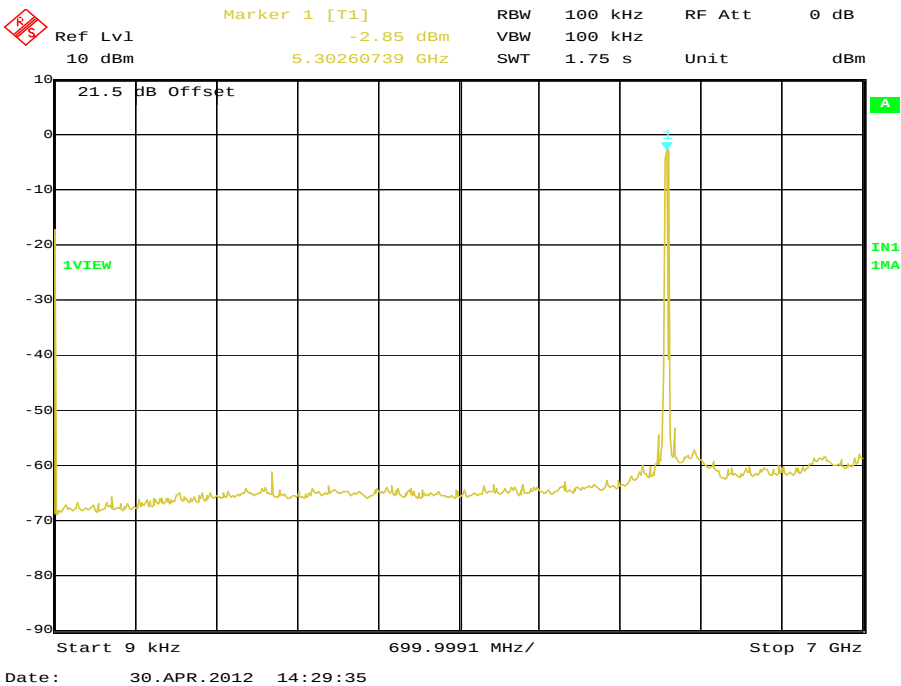




Product Service

7 GHz to 12 GHz

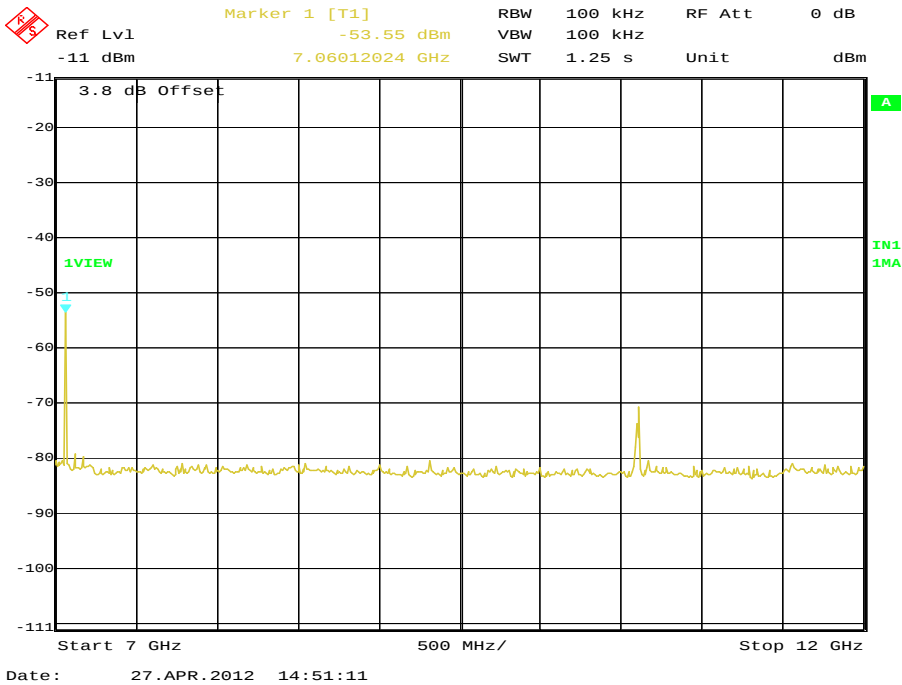


12 GHz to 18 GHz

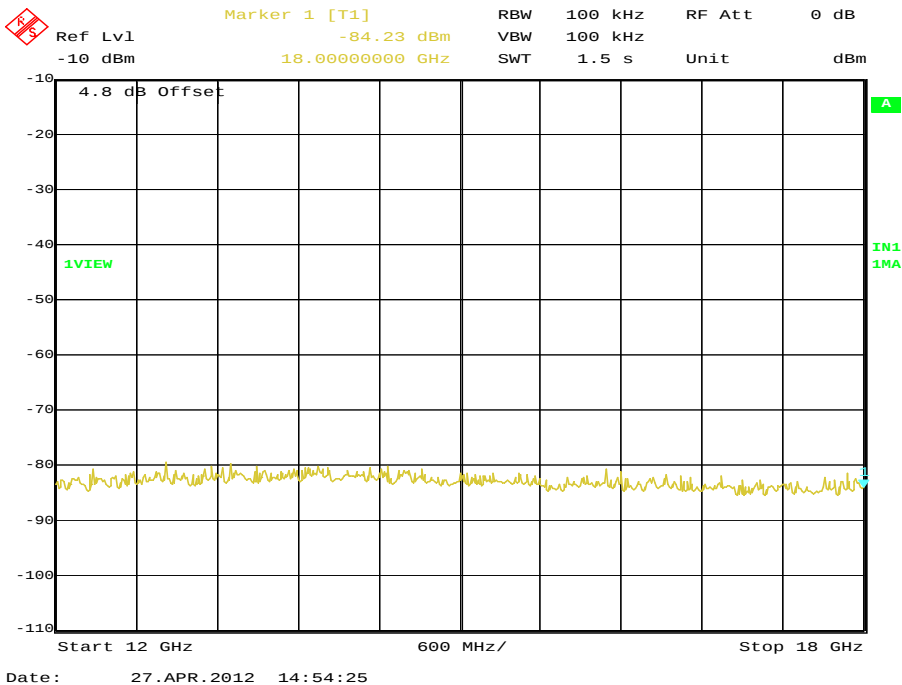




Product Service

18 GHz to 25 GHz

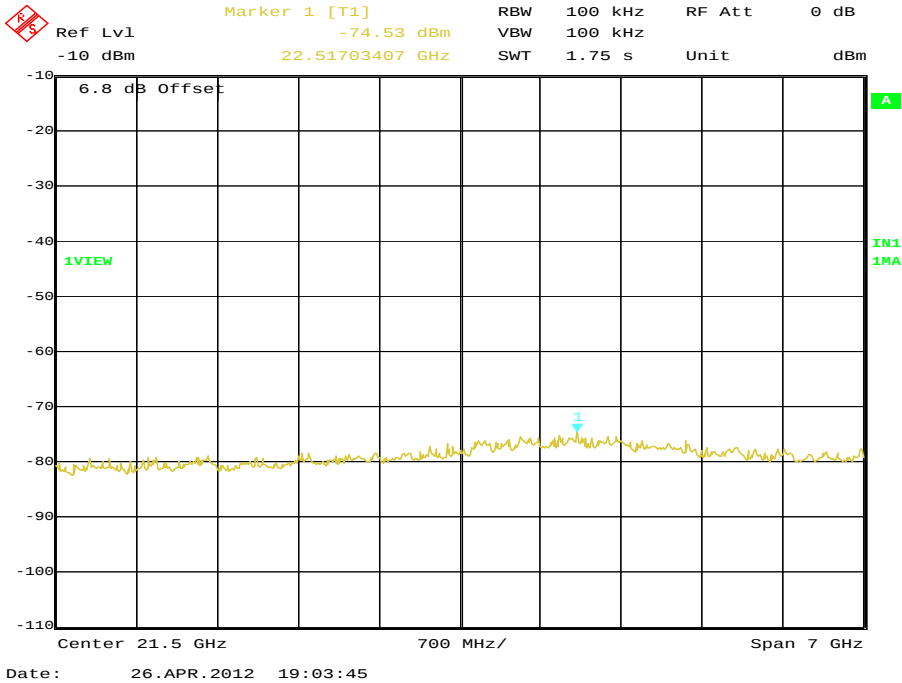

25 GHz to 40 GHz

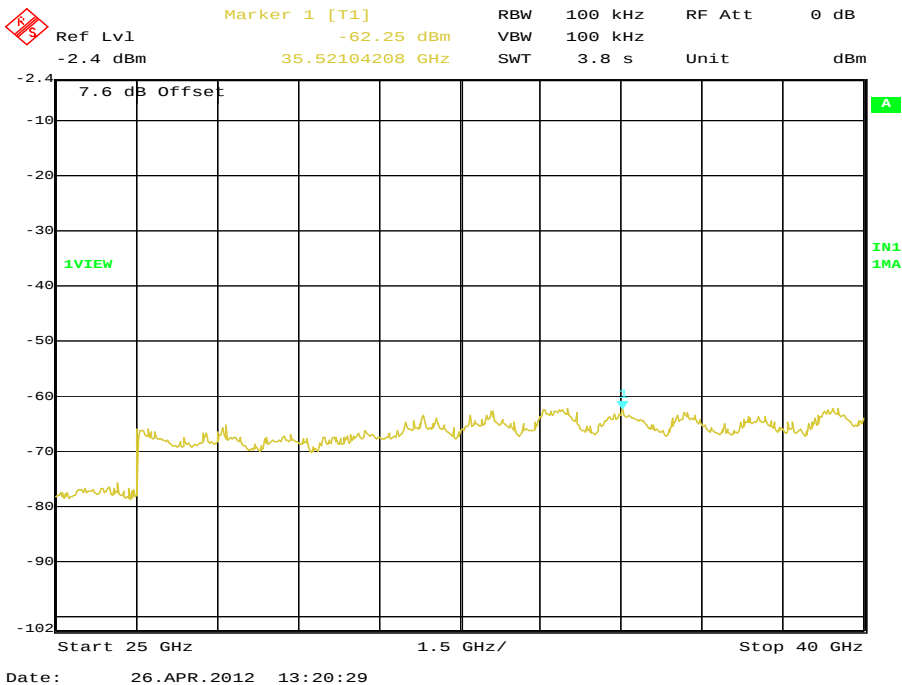





Product Service

5320 MHz

9 kHz to 7 GHz

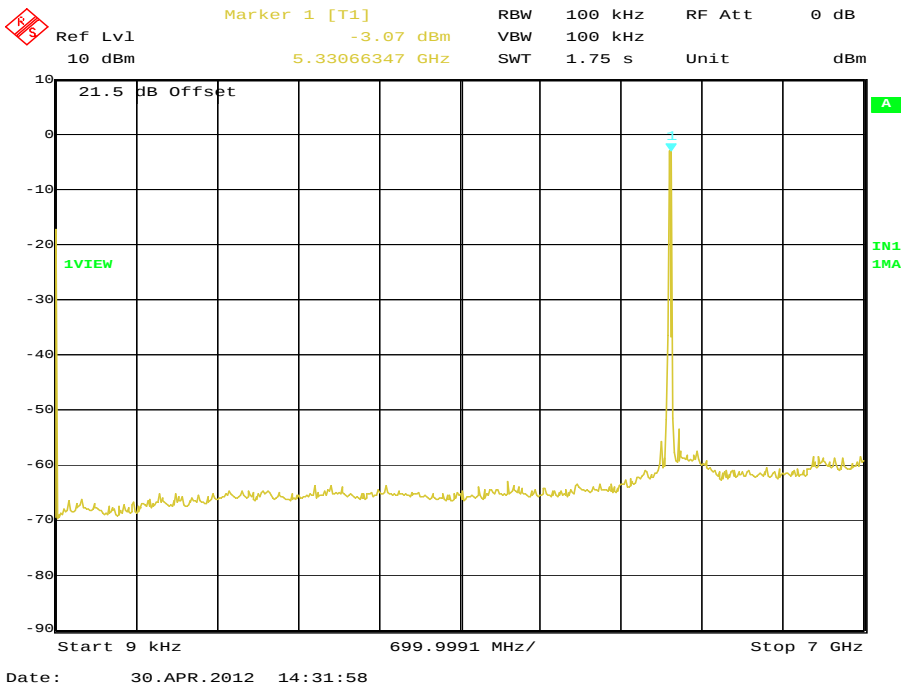


7 GHz to 12 GHz

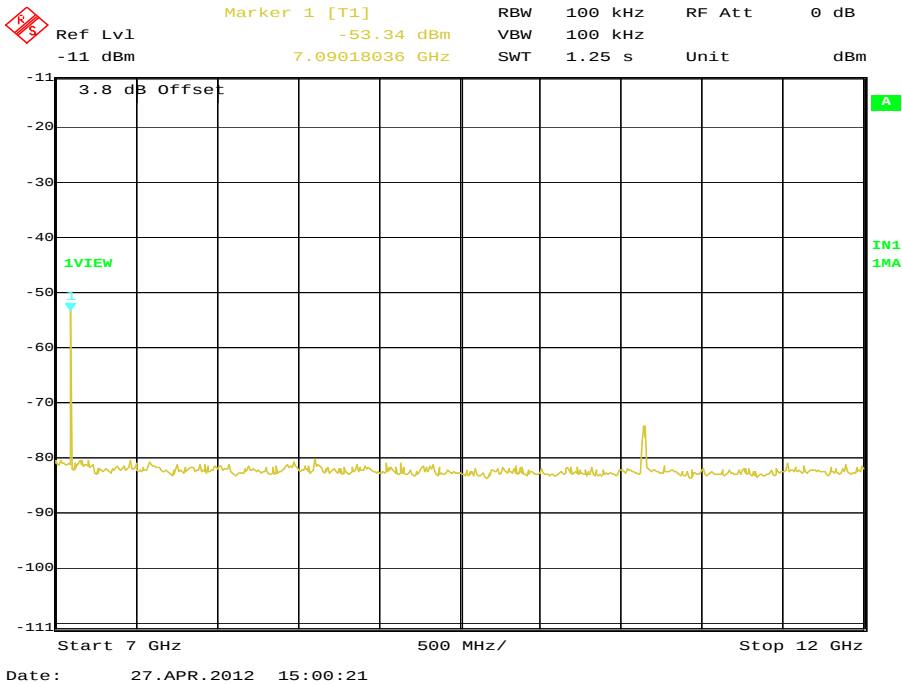




Product Service

12 GHz to 18 GHz

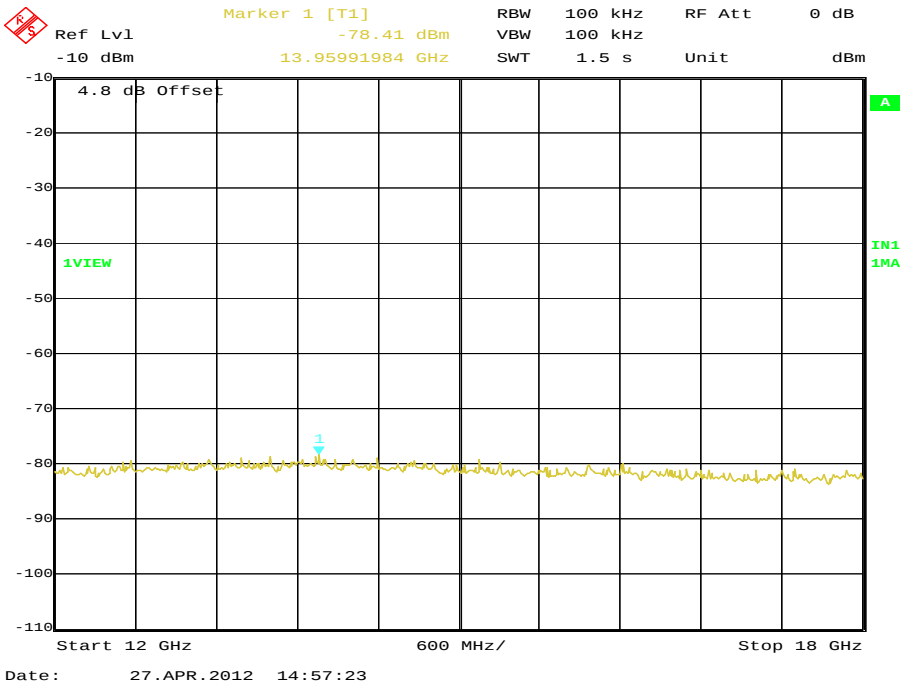


18 GHz to 25 GHz

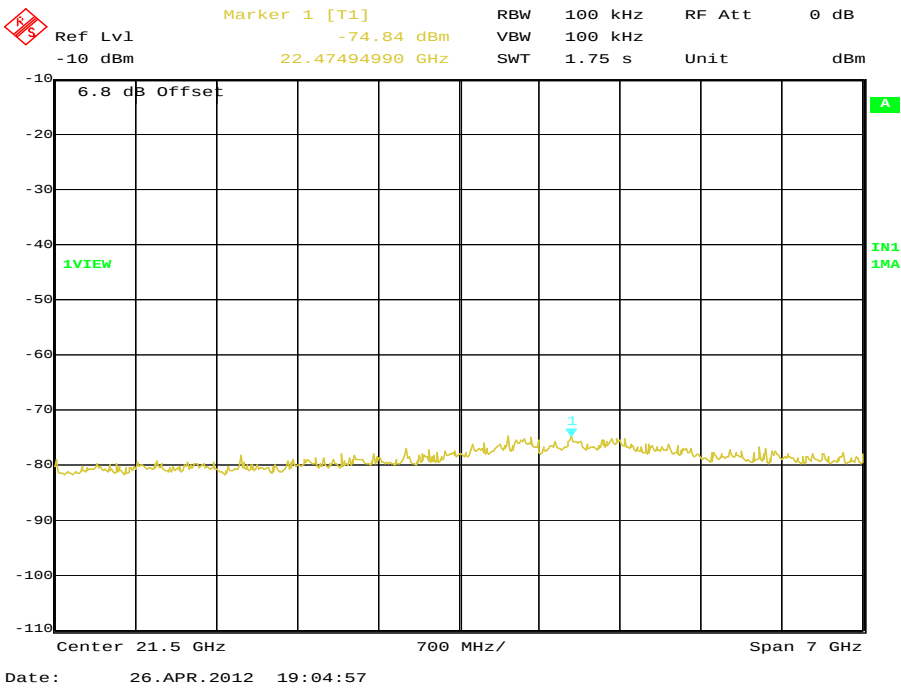



Product Service


25 GHz to 40 GHz

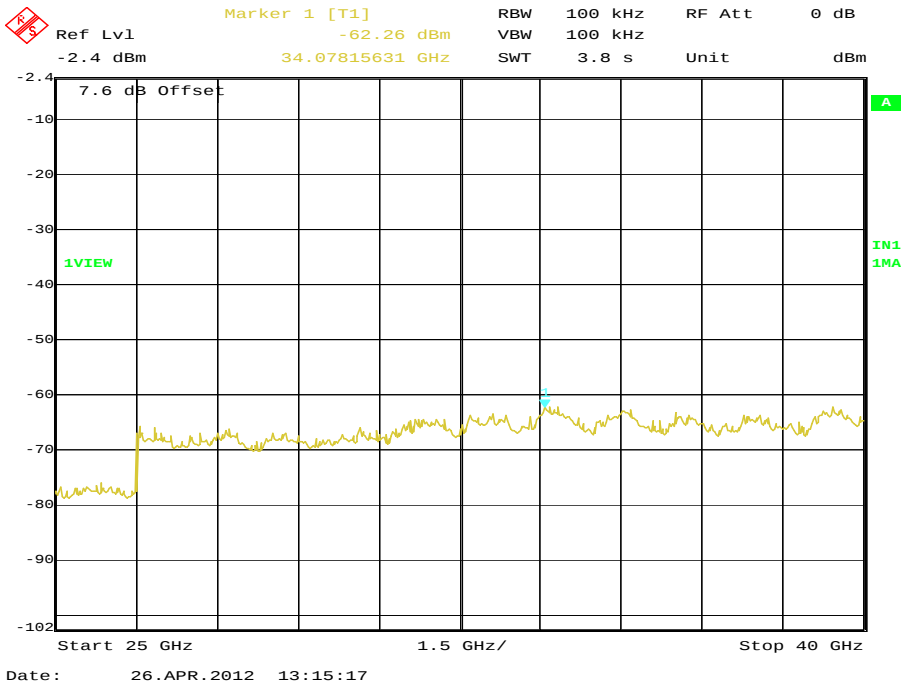

Frequency Band 3

5500 MHz


9 kHz to 7 GHz

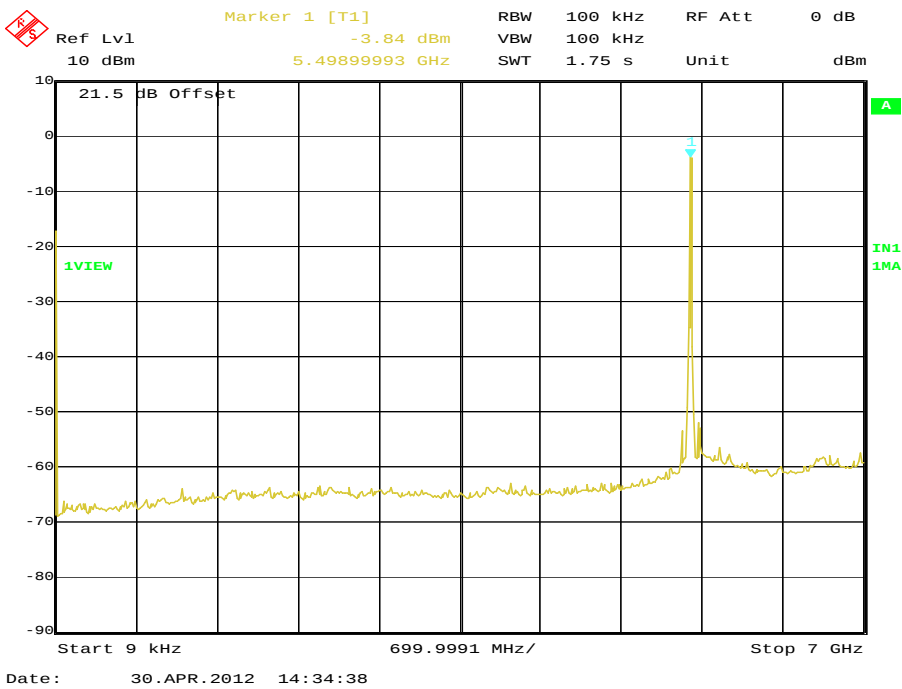




Product Service

7 GHz to 12 GHz

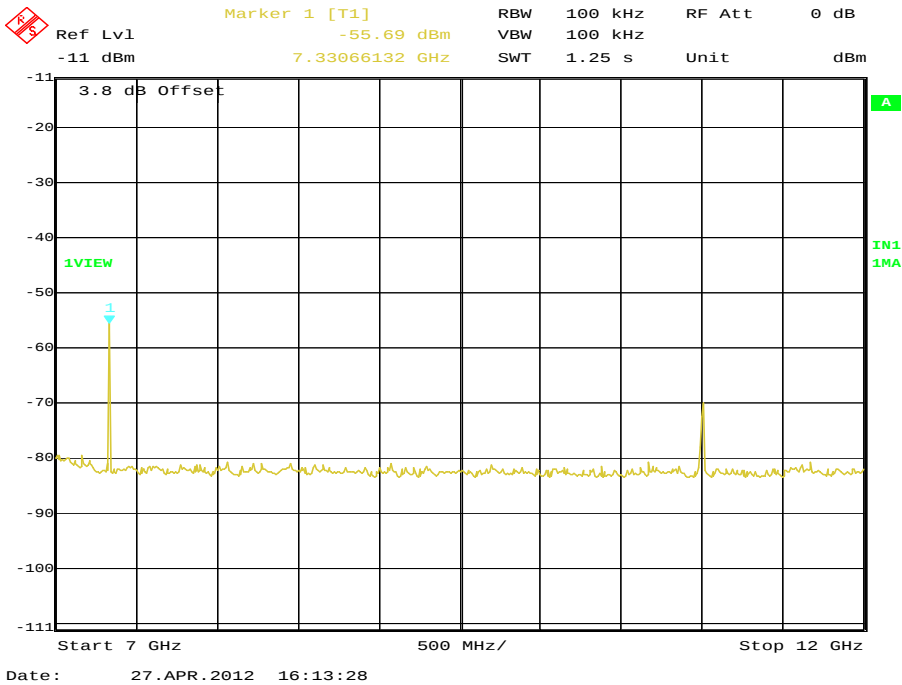


12 GHz to 18 GHz

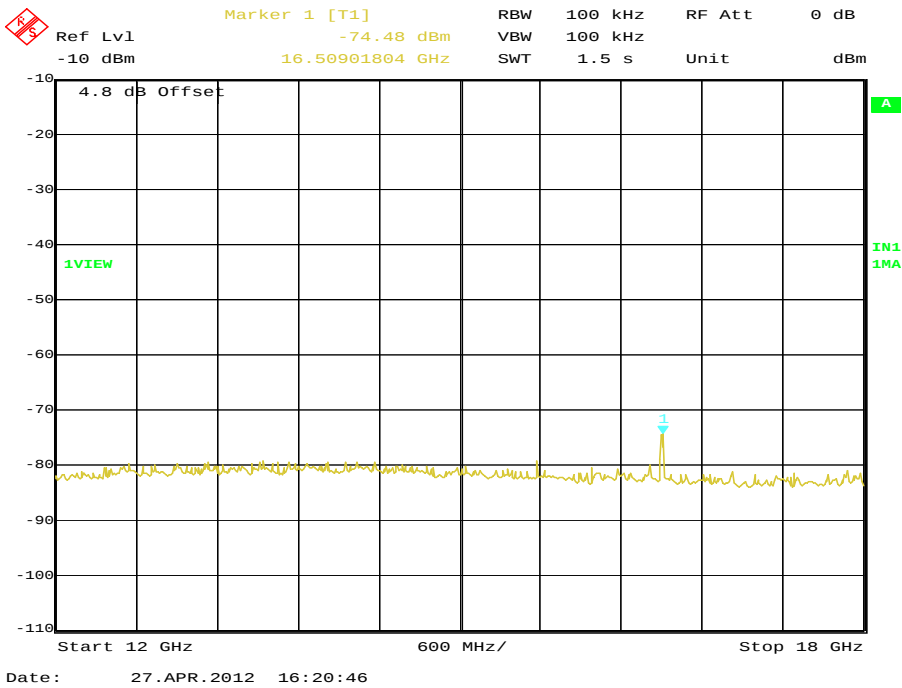




Product Service

18 GHz to 25 GHz

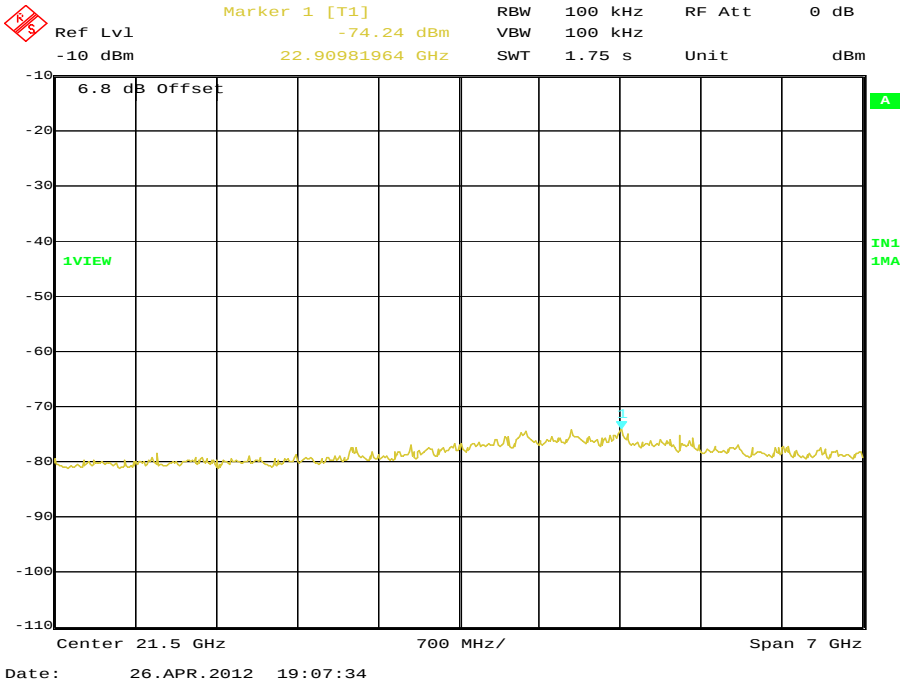

25 GHz to 40 GHz

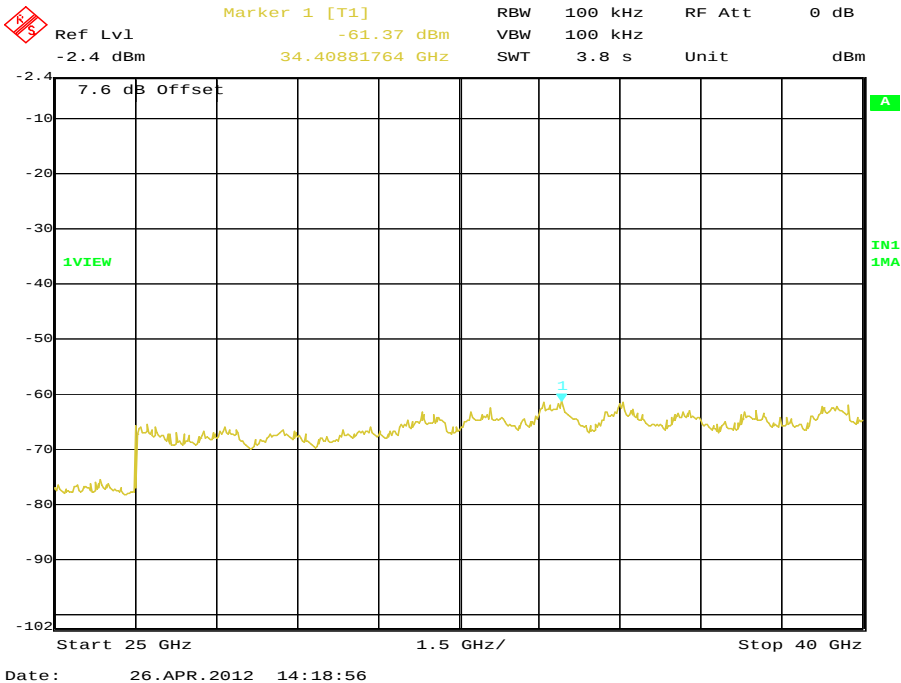





Product Service

5600 MHz

9 kHz to 7 GHz

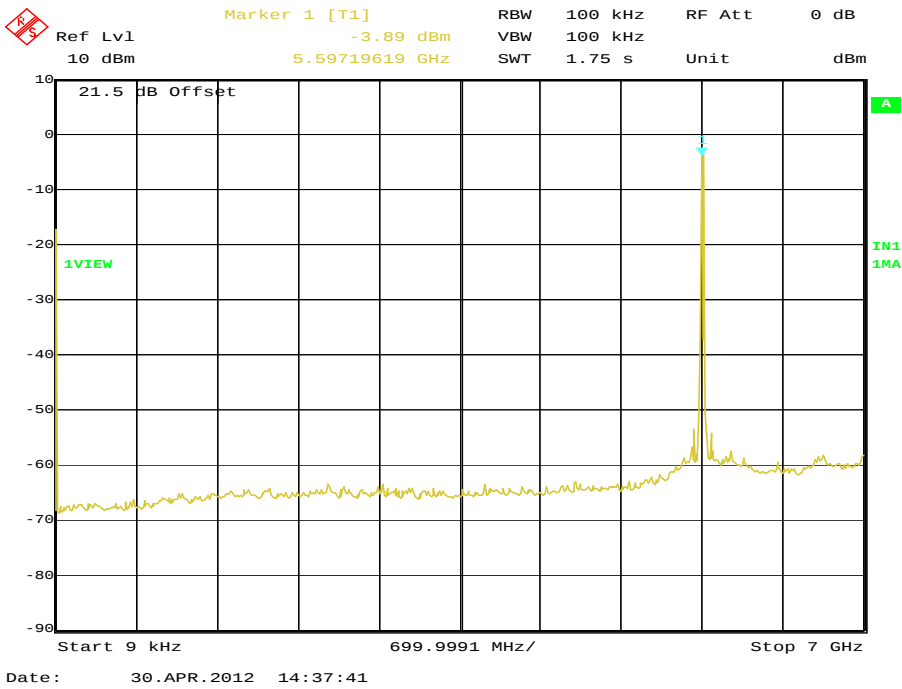


7 GHz to 12 GHz

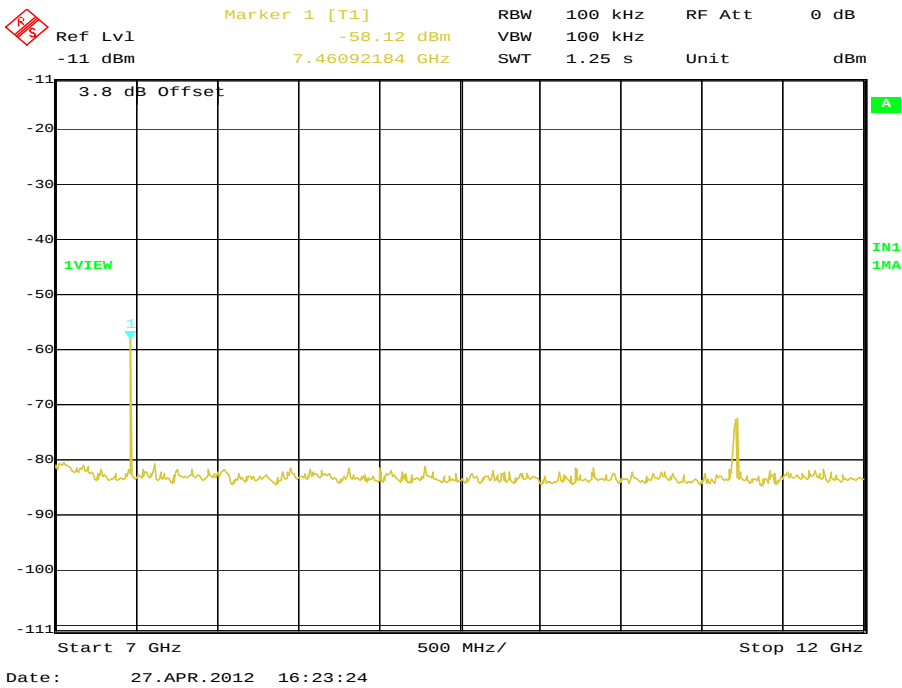




Product Service

12 GHz to 18 GHz

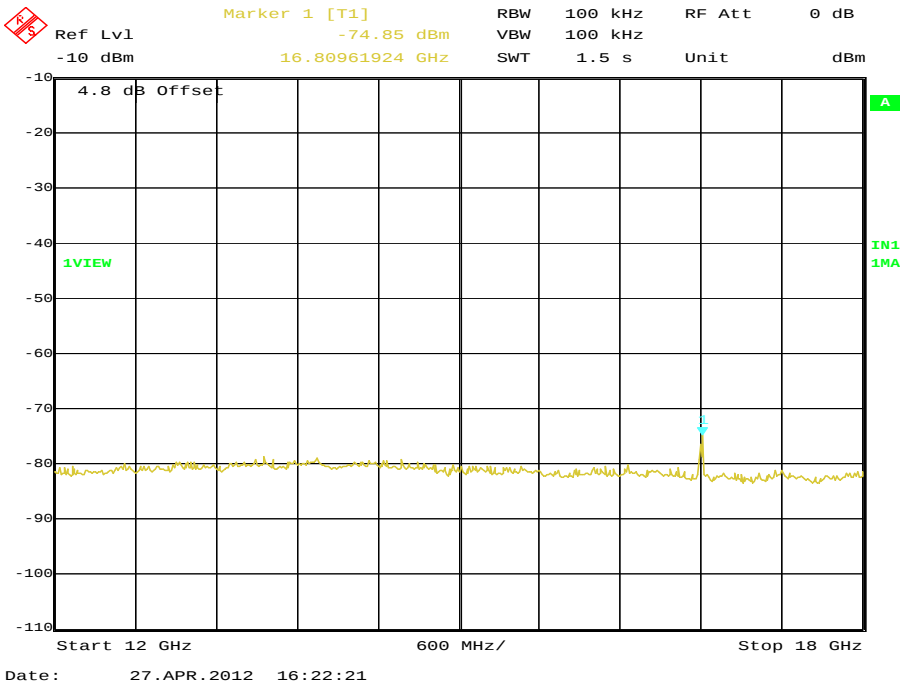


18 GHz to 25 GHz

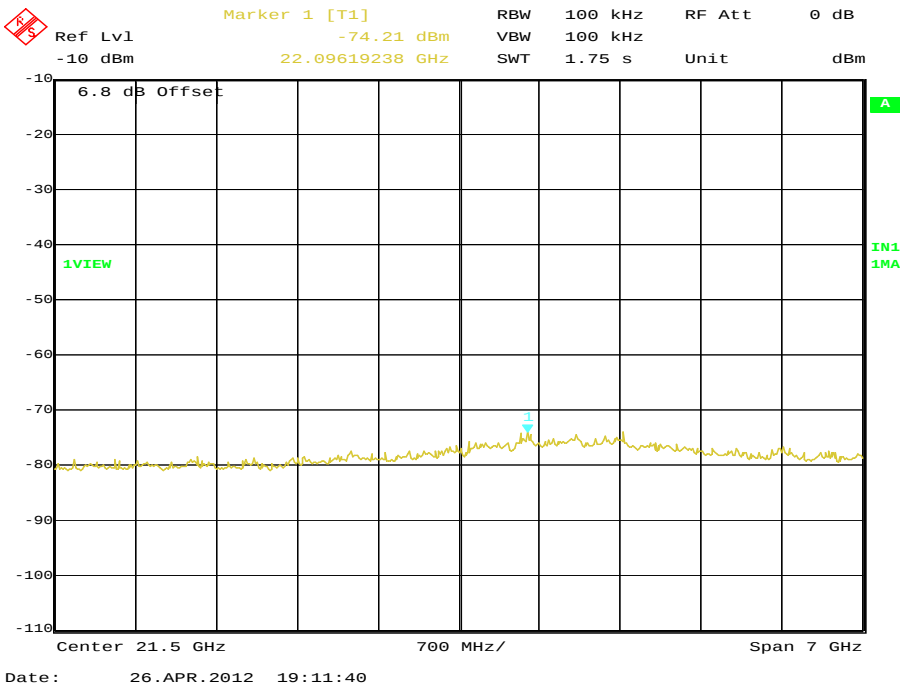




Product Service

25 GHz to 40 GHz

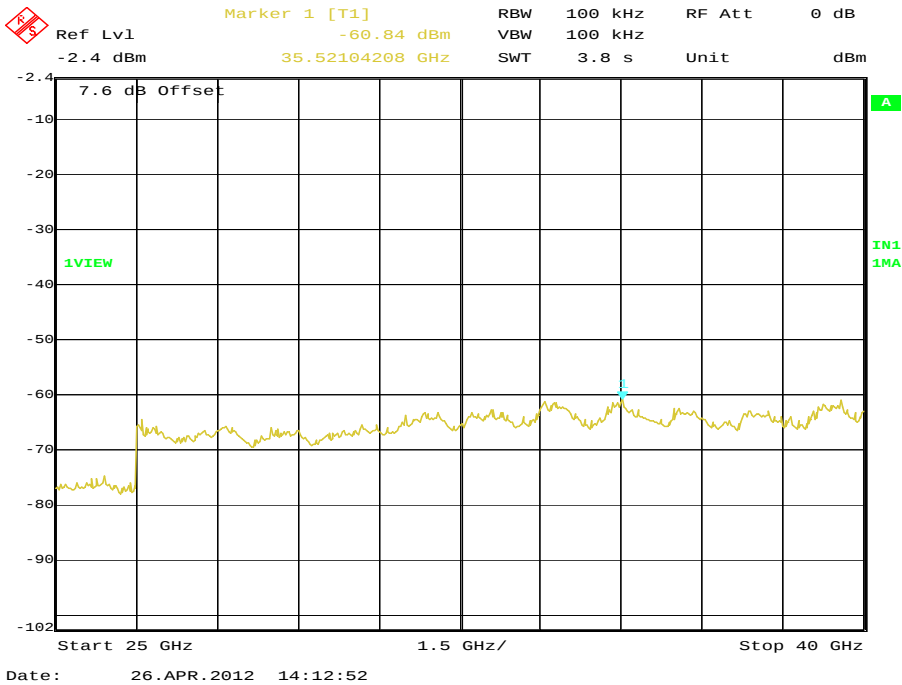

5700 MHz


9 kHz to 7 GHz

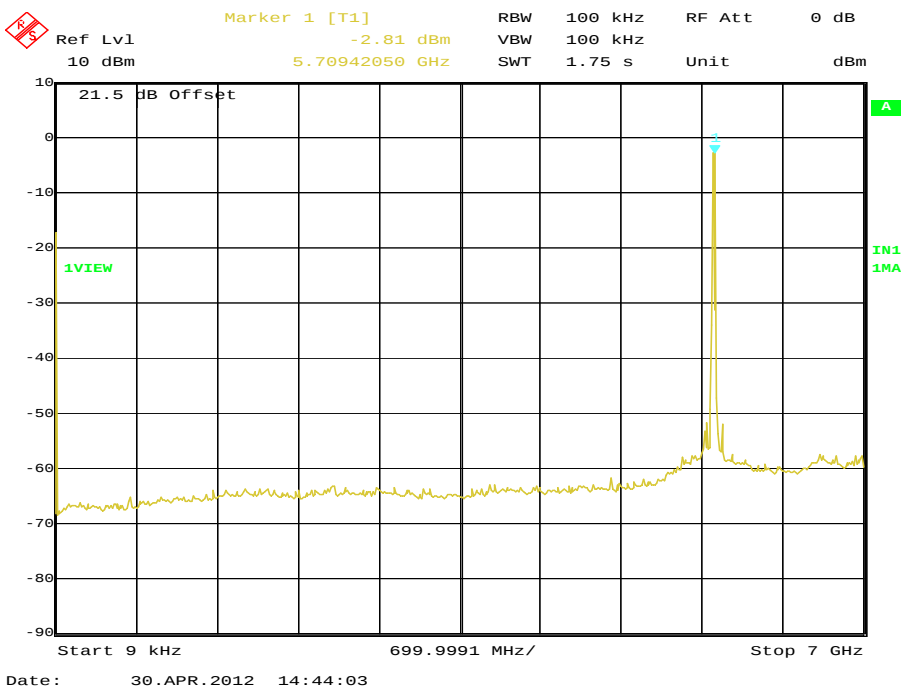




Product Service

7 GHz to 12 GHz

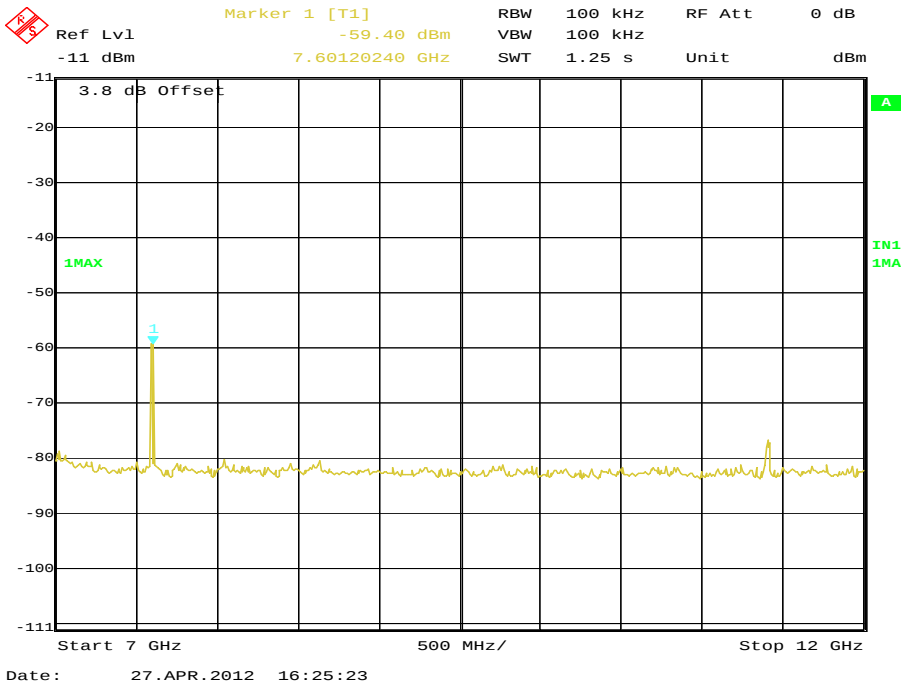


12 GHz to 18 GHz

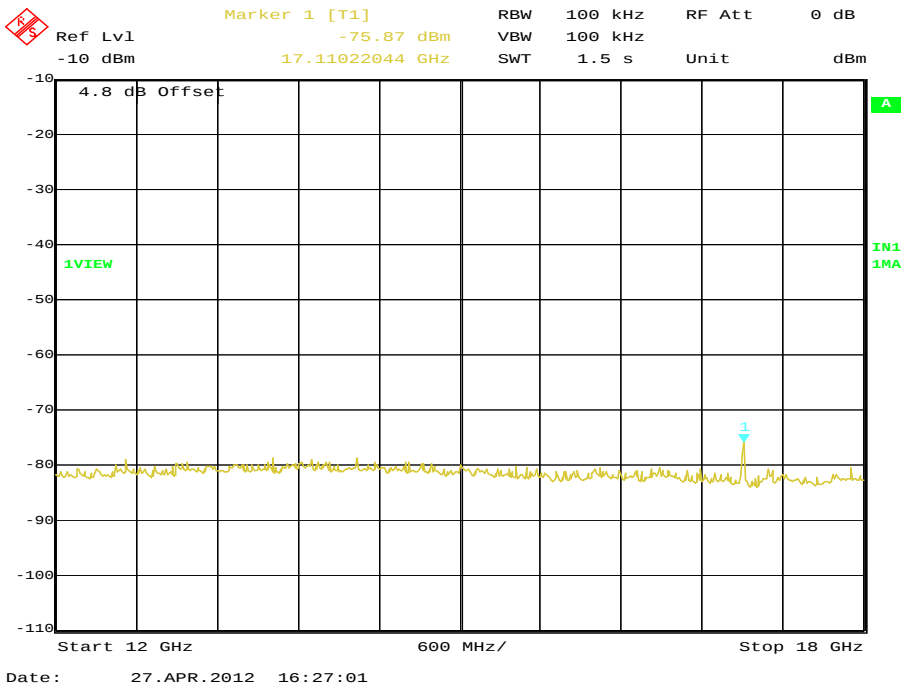




18 GHz to 25 GHz

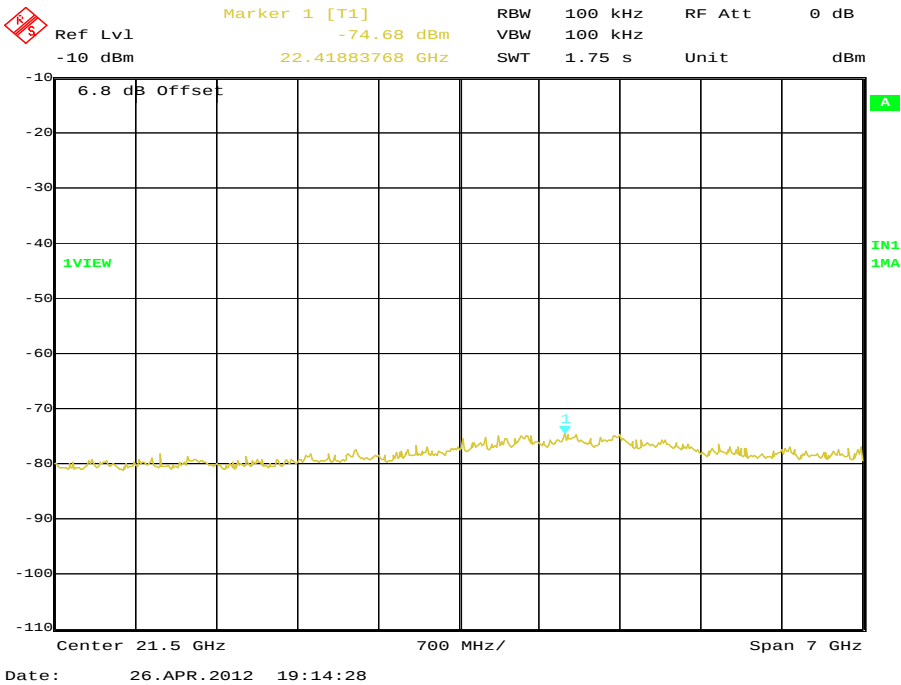

25 GHz to 40 GHz

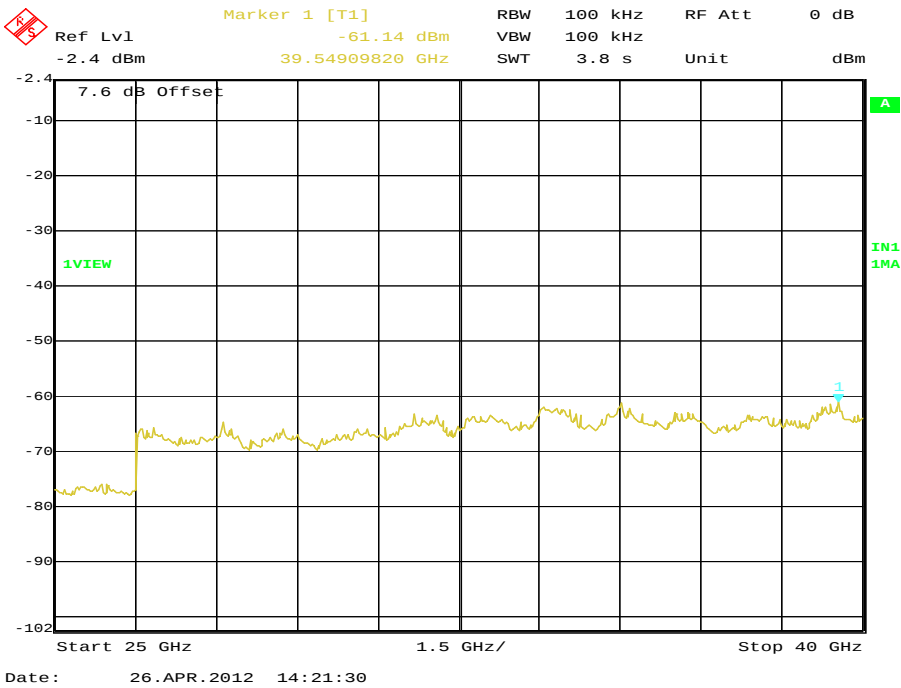




Product Service


Frequency Band 4

5745 MHz

9 kHz to 7 GHz

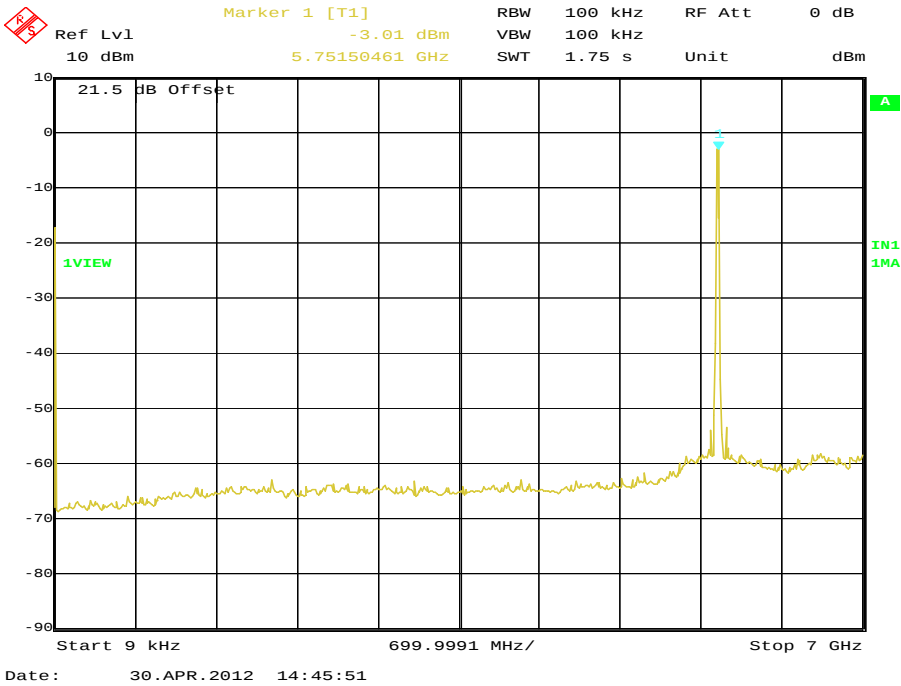


7 GHz to 12 GHz

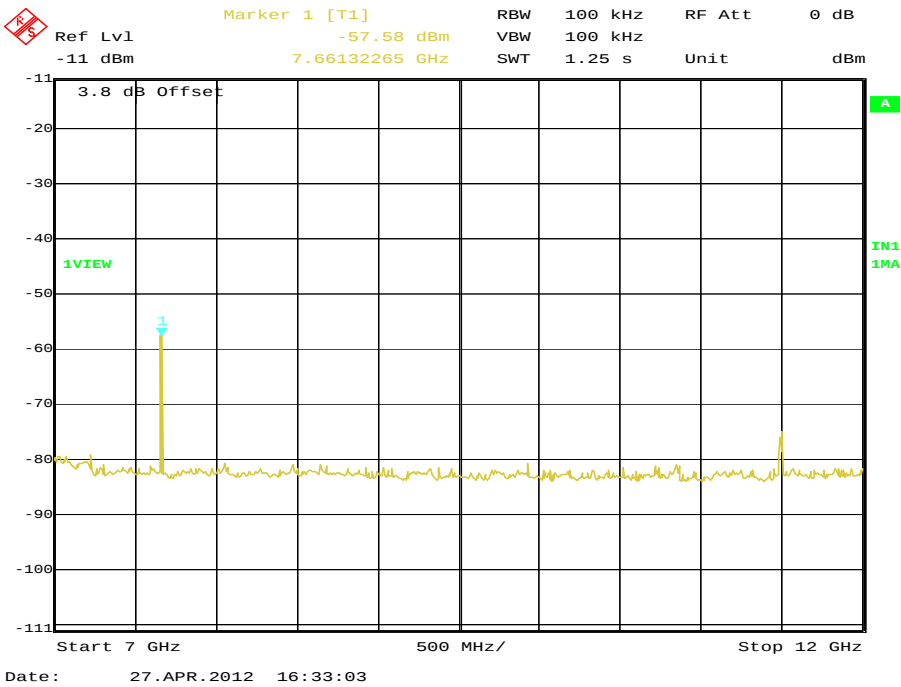




Product Service

12 GHz to 18 GHz

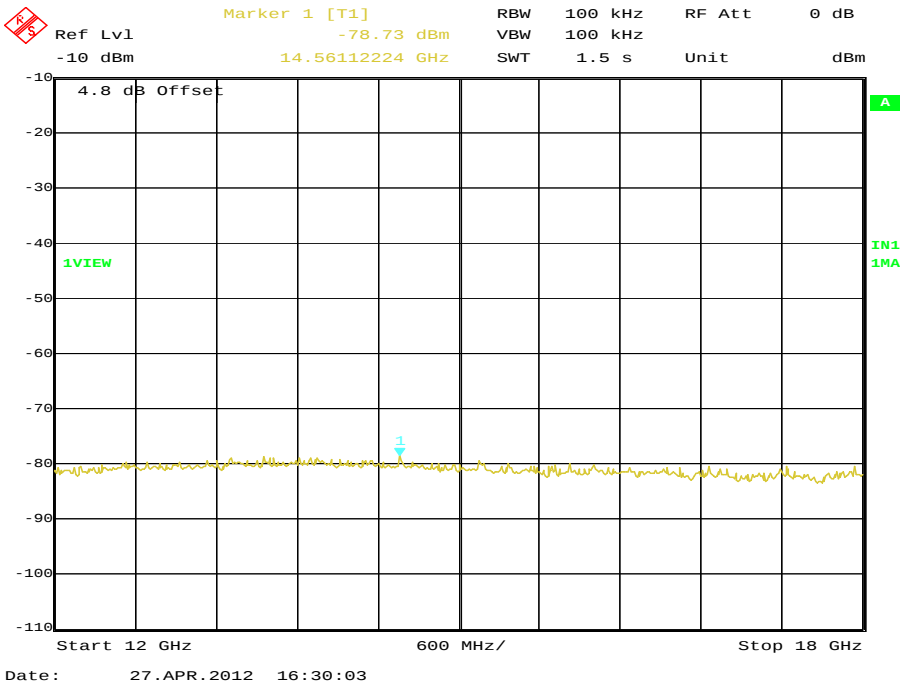


18 GHz to 25 GHz

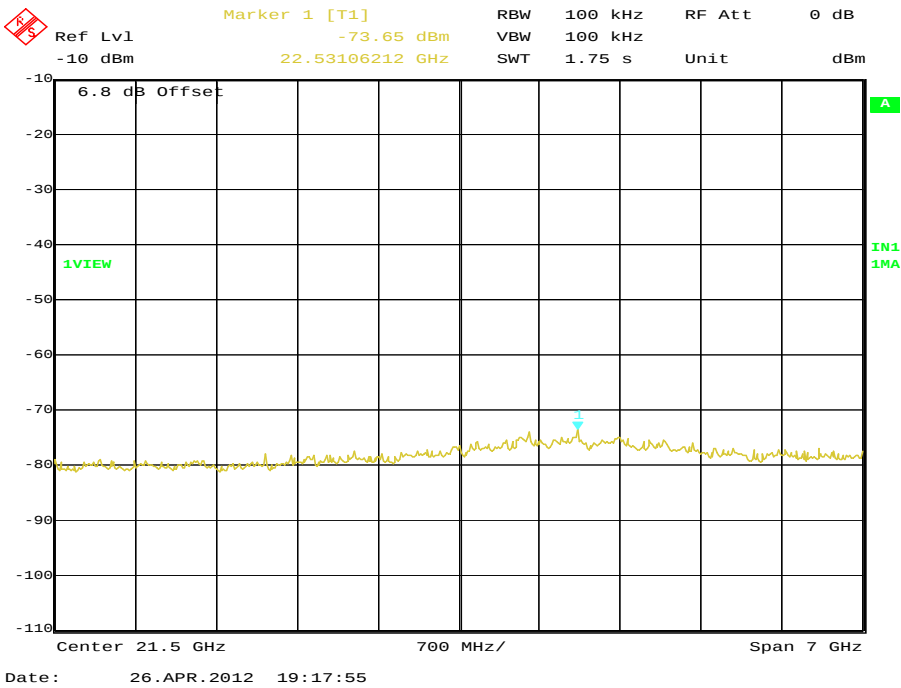




Product Service

25 GHz to 40 GHz

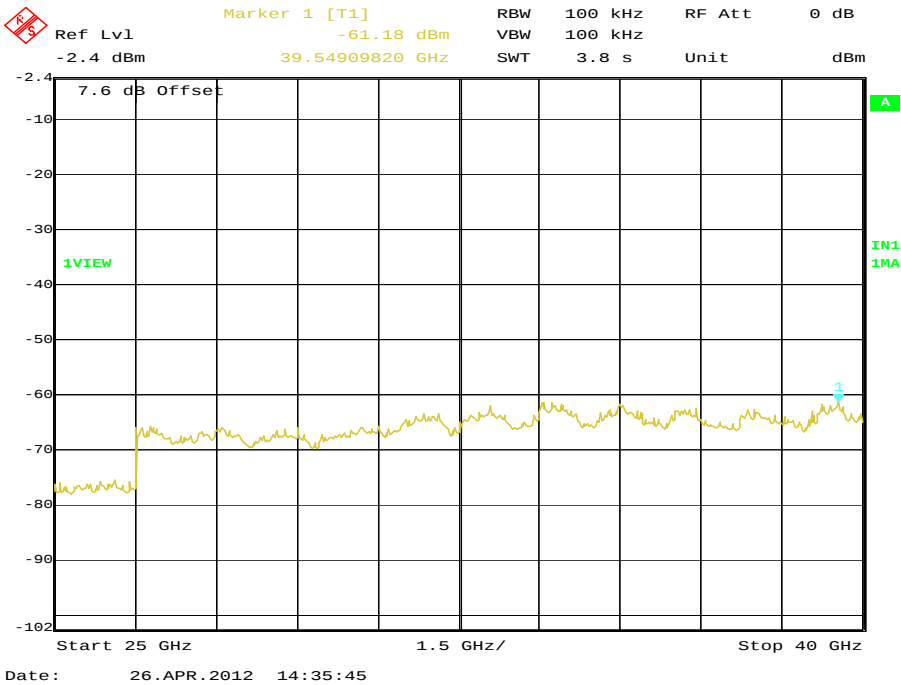

5765 MHz


9 kHz to 7 GHz

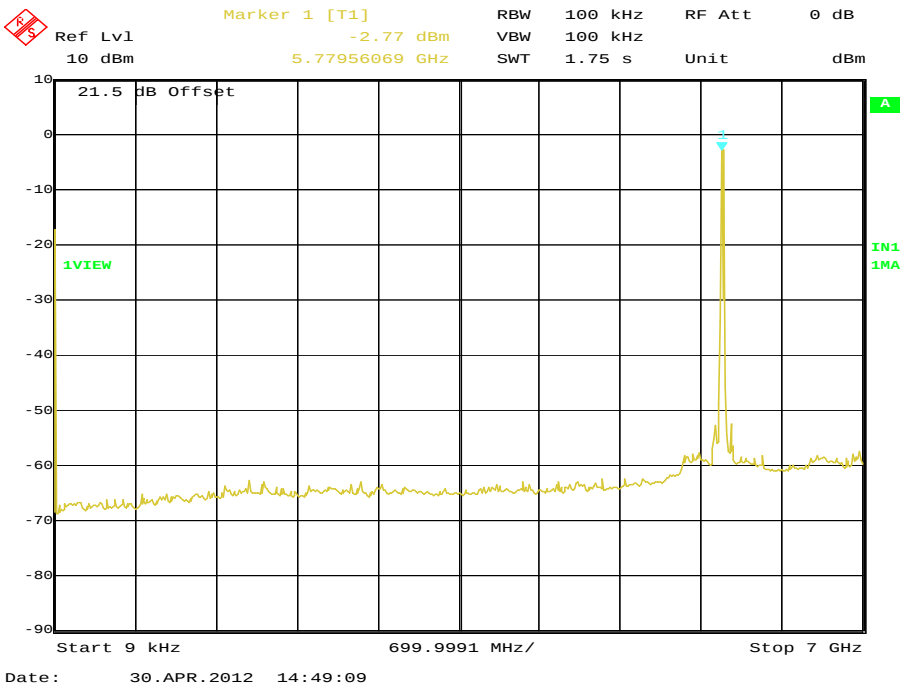




Product Service

7 GHz to 12 GHz


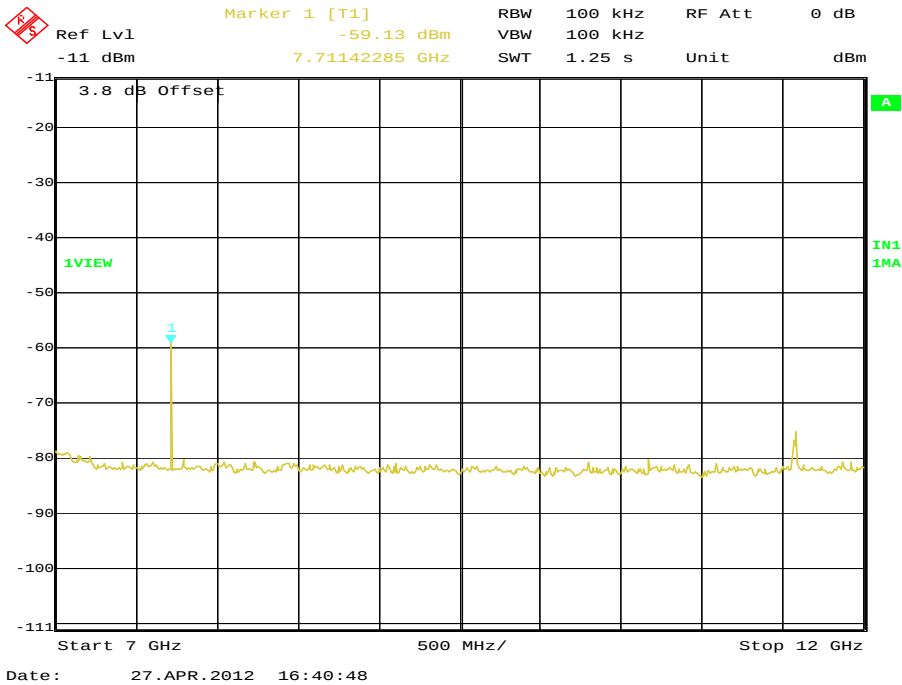


12 GHz to 18 GHz

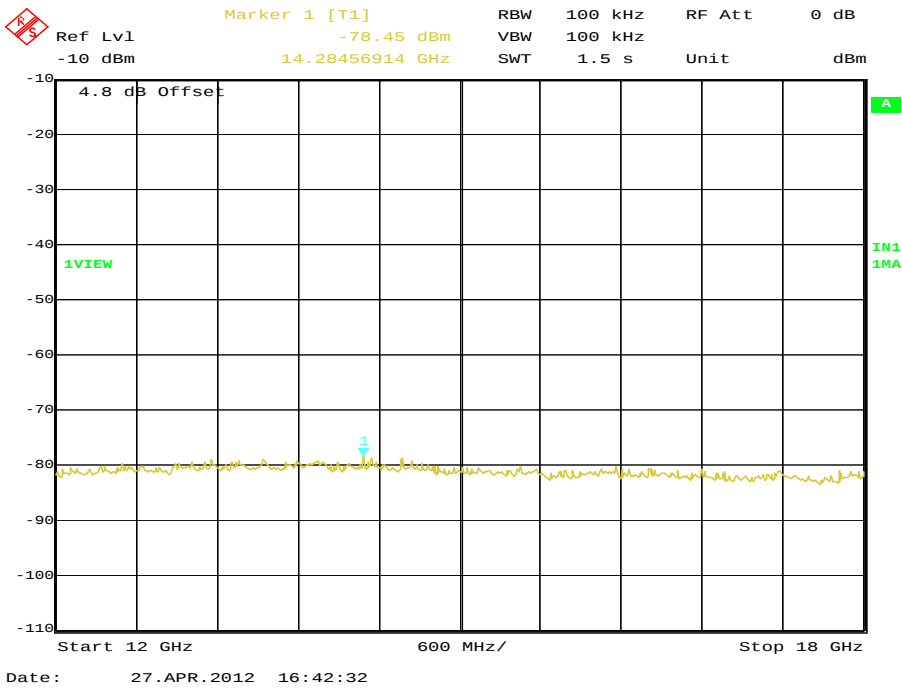



Product Service

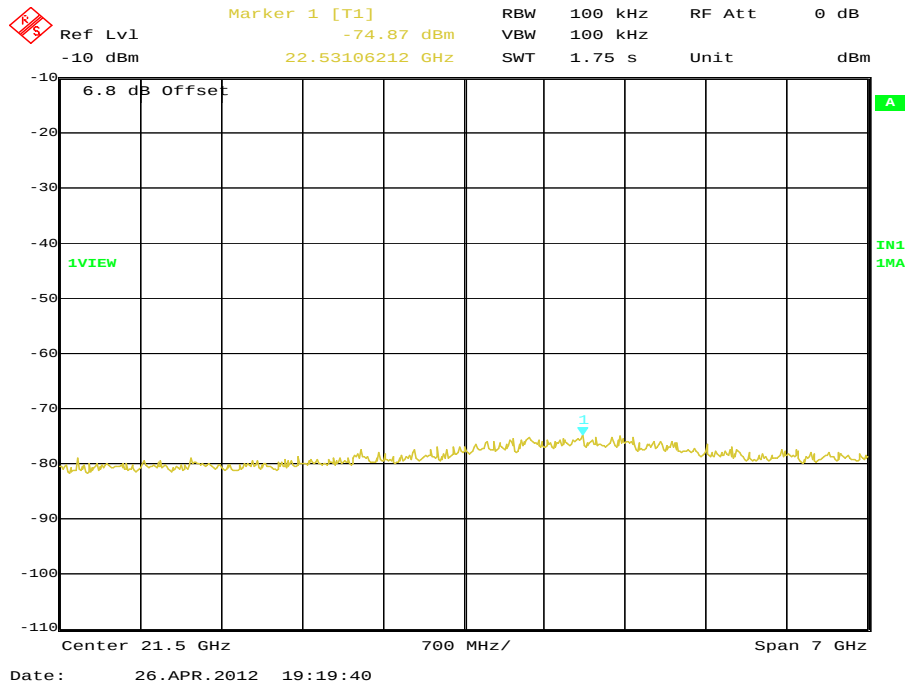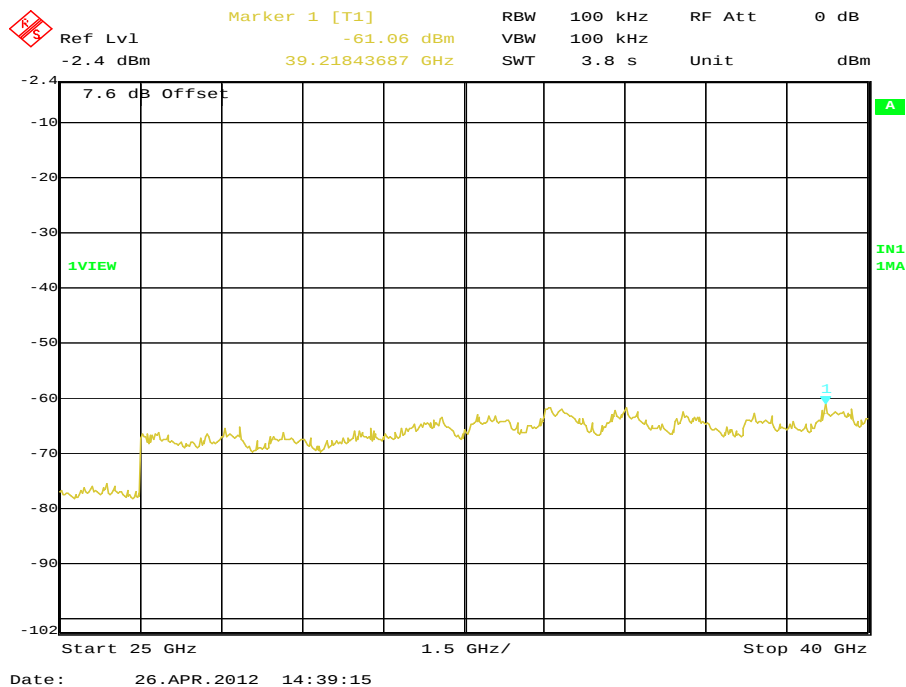
18 GHz to 25 GHz25 GHz to 40 GHz




Product Service

5825 MHz

9 kHz to 7 GHz

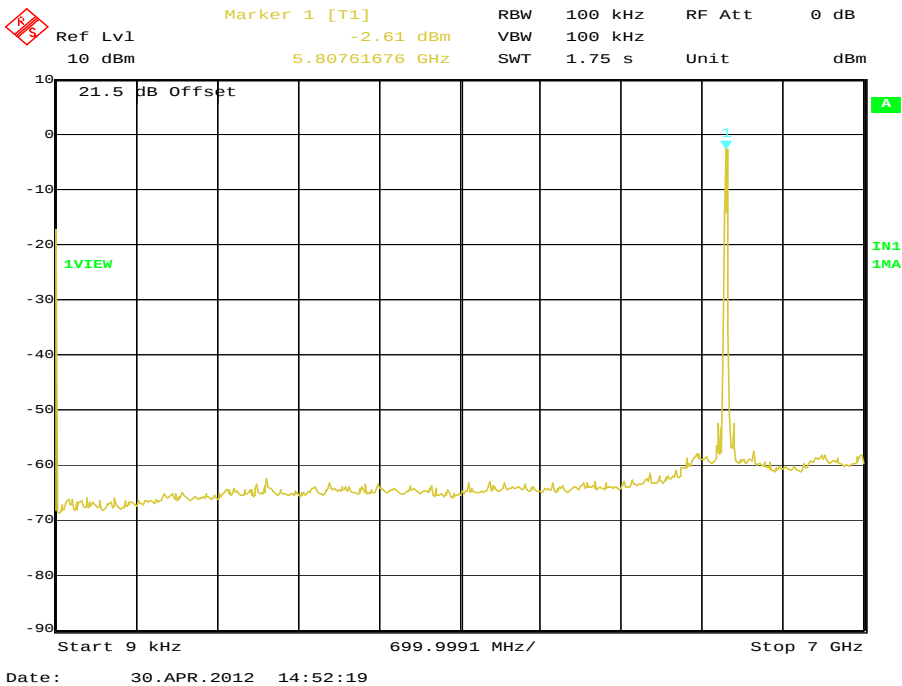


7 GHz to 12 GHz

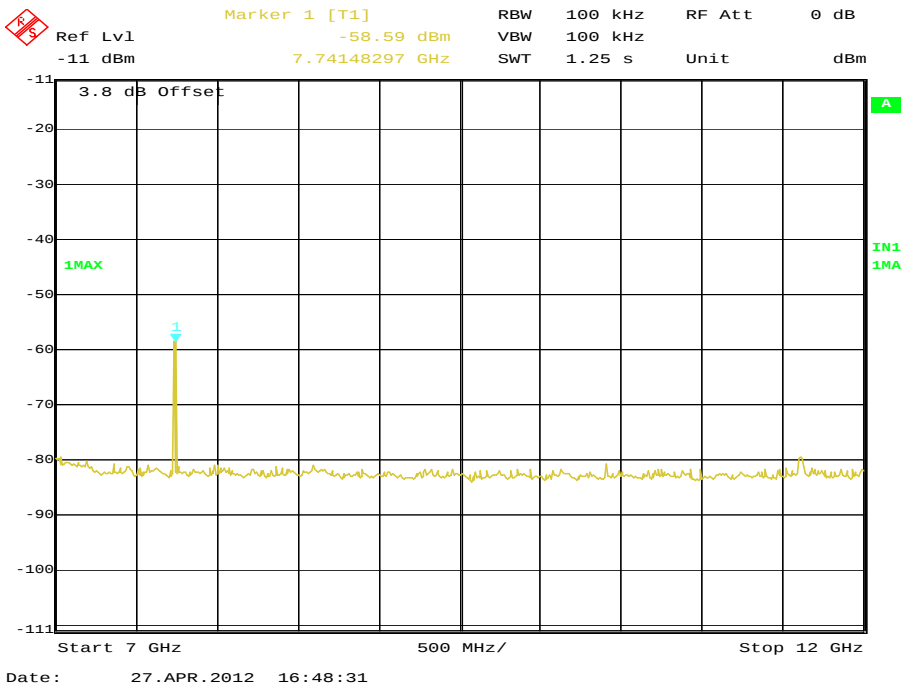




Product Service

12 GHz to 18 GHz

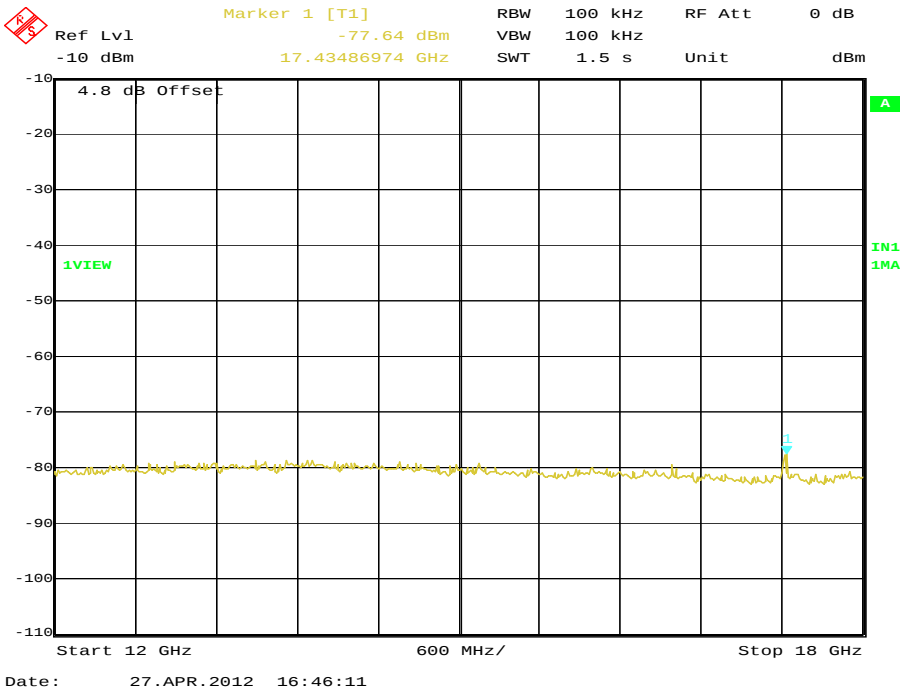


18 GHz to 25 GHz

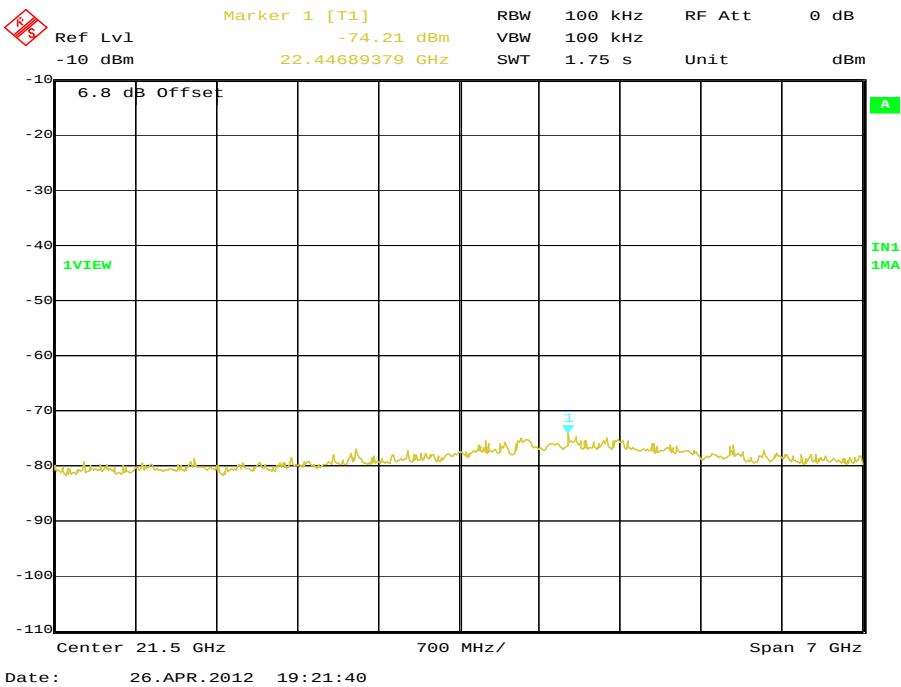



Product Service

25 GHz to 40 GHz

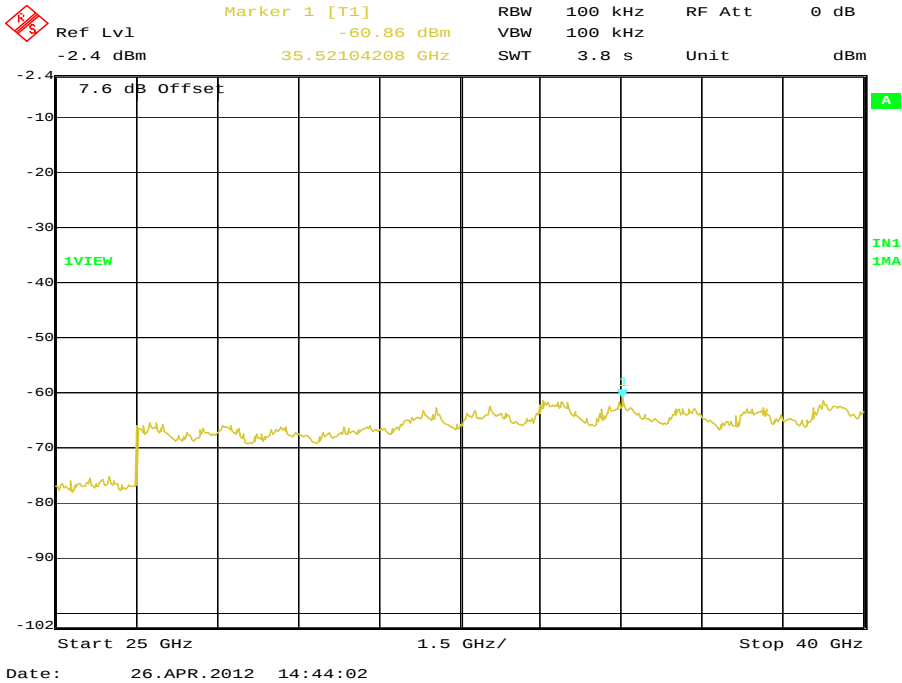

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.

802.11(a) – Onboard PIFA Antenna
802.11(a) – Onboard PIFA Antenna
802.11(a) – Onboard PIFA Antenna



Product Service


Onboard PIFA Antenna

Spurious Radiated Emissions

Frequency Band 1

5180 MHz

30 MHz to 1 GHz

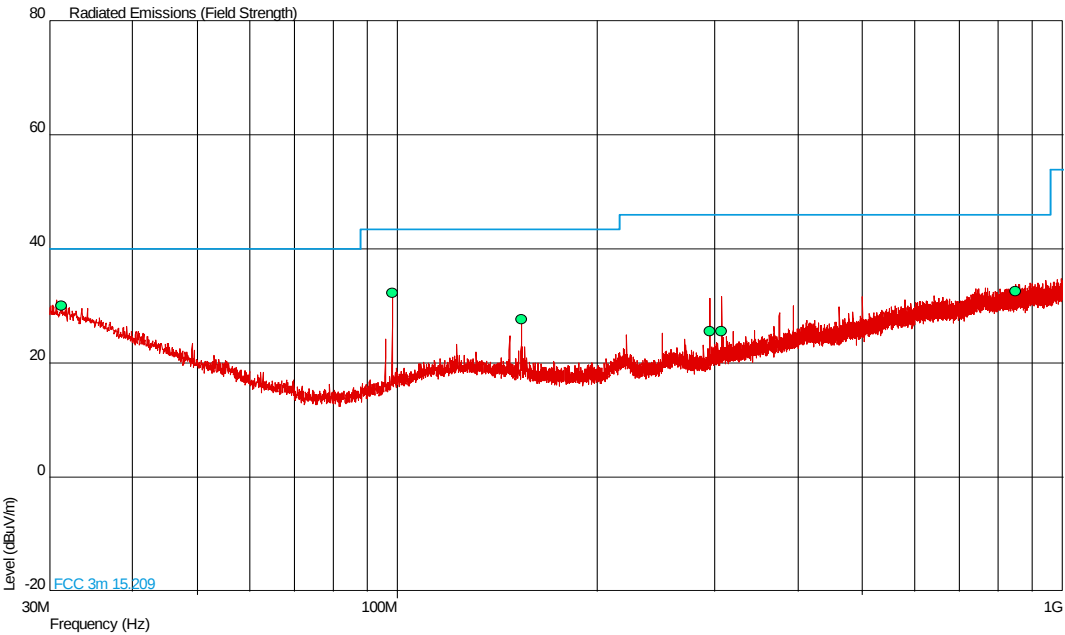


Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
31.296	30.1	32.0	40.0	100	-9.9	68.0	241	1.00	Horizontal
98.298	32.3	41.2	43.5	150	-11.2	108.8	341	1.00	Vertical
153.601	27.6	24.0	43.5	150	-15.9	126.0	97	1.00	Vertical
294.936	25.5	18.8	46.0	200	-20.5	181.2	343	1.00	Vertical
307.208	25.6	19.1	46.0	200	-20.4	180.9	105	1.00	Horizontal
849.951	32.6	42.7	46.0	200	-13.4	157.3	218	1.00	Vertical




Product Service

1 GHz to 7 GHz

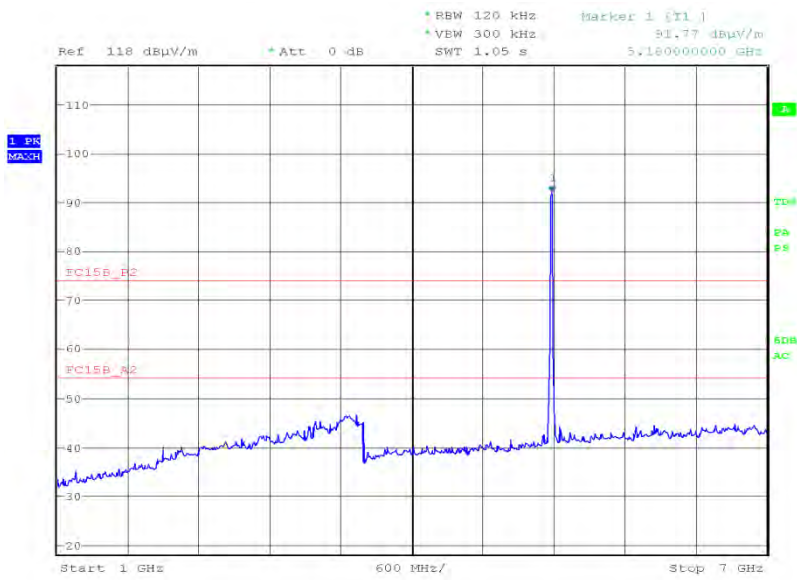

Date: 27.MAR.2012 19:51:42

7 GHz to 8 GHz

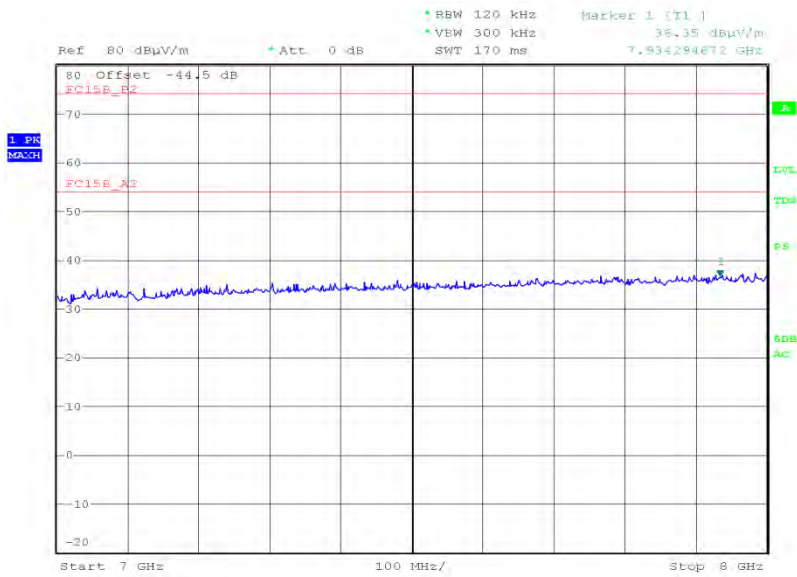


Date: 2.APR.2012 17:15:57




Product Service

8 GHz to 18 GHz

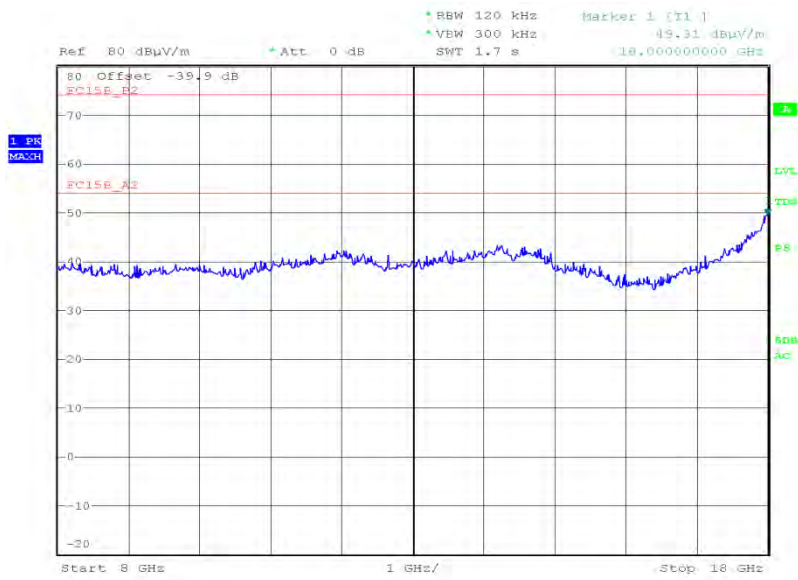

Date: 2.APR.2012 20:35:43


18 GHz to 40 GHz

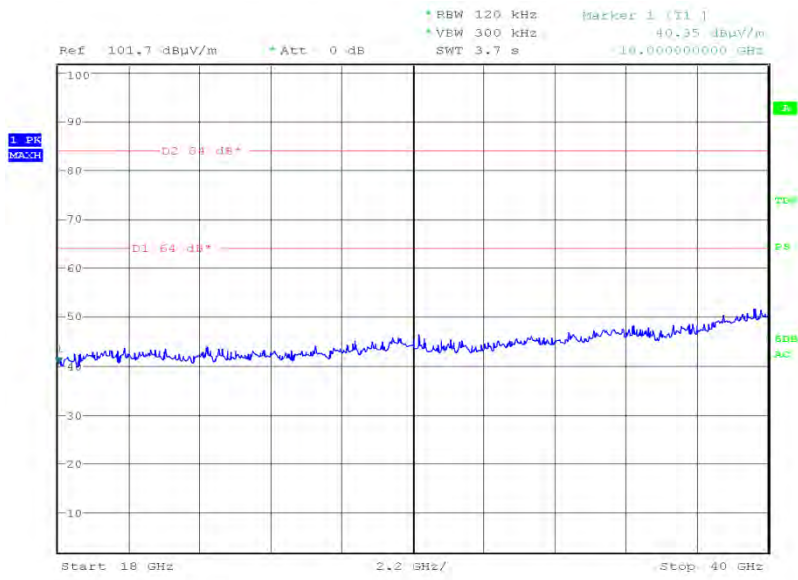

Date: 4.APR.2012 16:32:42



Product Service

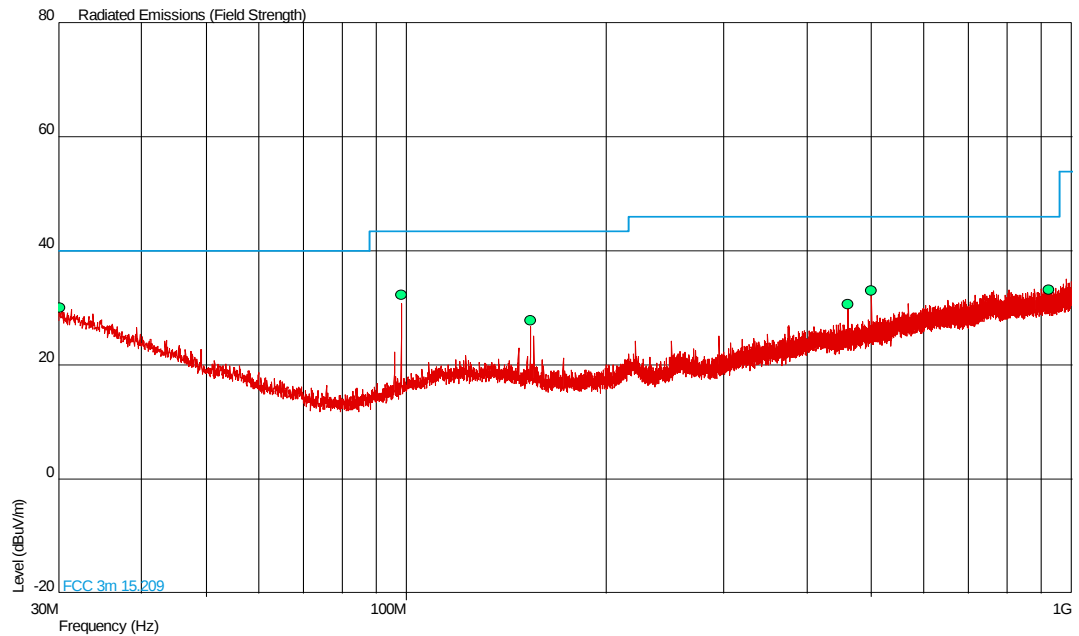
5220 MHz30 MHz to 1 GHz

Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.143	30.0	31.6	40.0	100	-10.0	68.4	188	1.00	Vertical
98.311	32.3	41.2	43.5	150	-11.2	108.8	348	1.00	Vertical
153.596	27.8	24.5	43.5	150	-15.7	125.5	125	1.00	Vertical
460.785	30.7	34.3	46.0	200	-15.3	165.7	357	1.00	Vertical
500.055	33.1	45.2	46.0	200	-12.9	154.8	0	1.00	Vertical
922.796	33.2	45.7	46.0	200	-12.8	154.3	325	2.16	Vertical




Product Service

1 GHz to 7 GHz

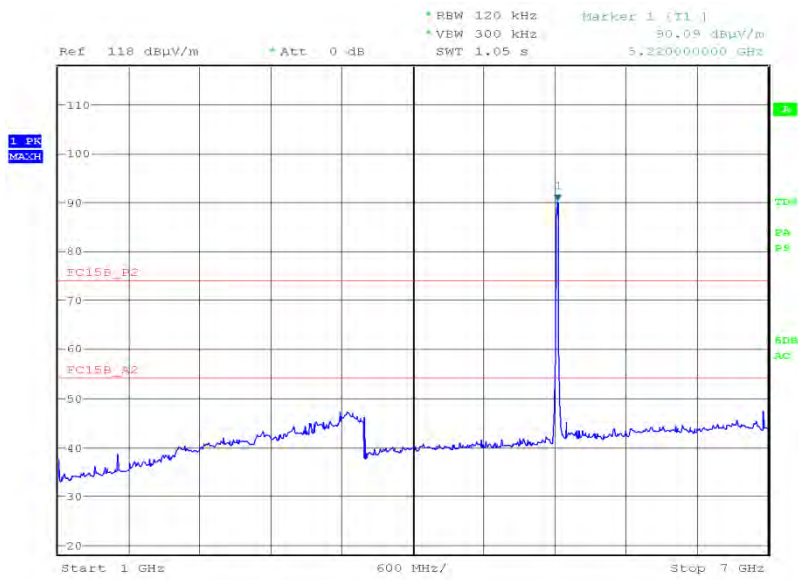

Date: 27.MAR.2012 20:26:17

7 GHz to 8 GHz

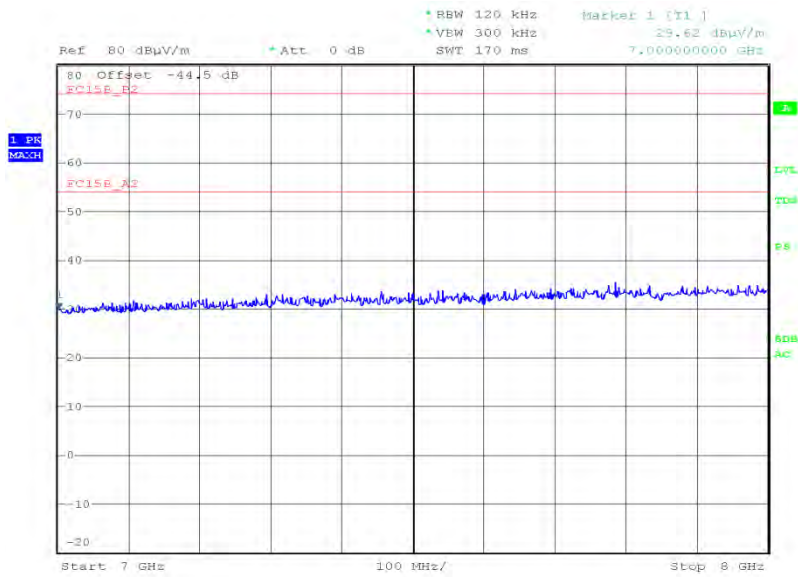


Date: 2.APR.2012 17:22:17




Product Service

8 GHz to 18 GHz

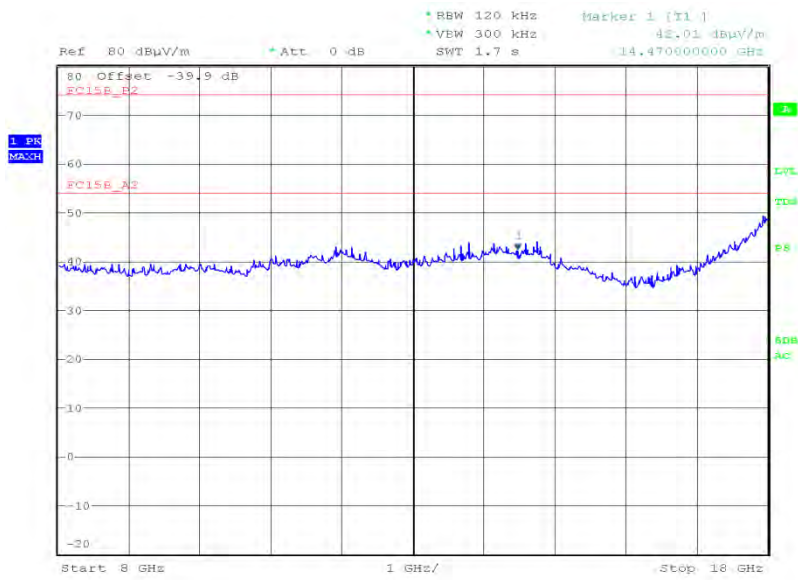

Date: 2.APR.2012 20:53:24


18 GHz to 40 GHz

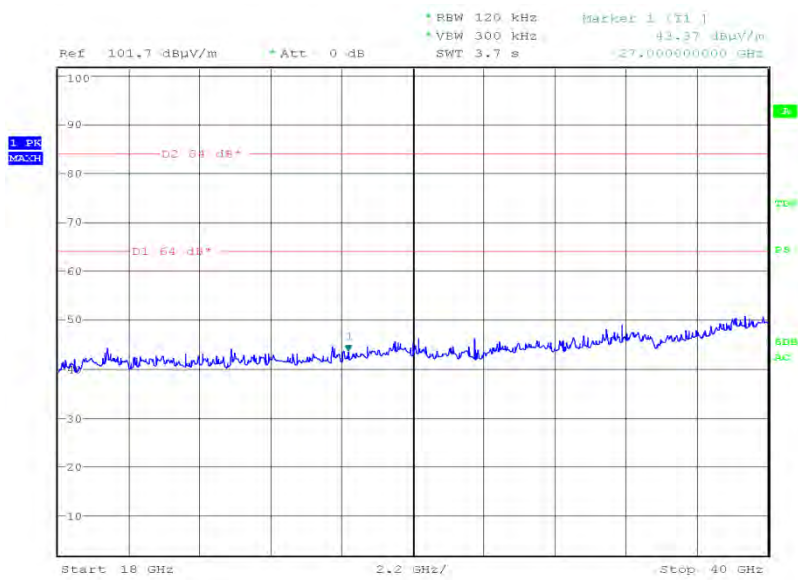

Date: 4.APR.2012 16:41:45



Product Service

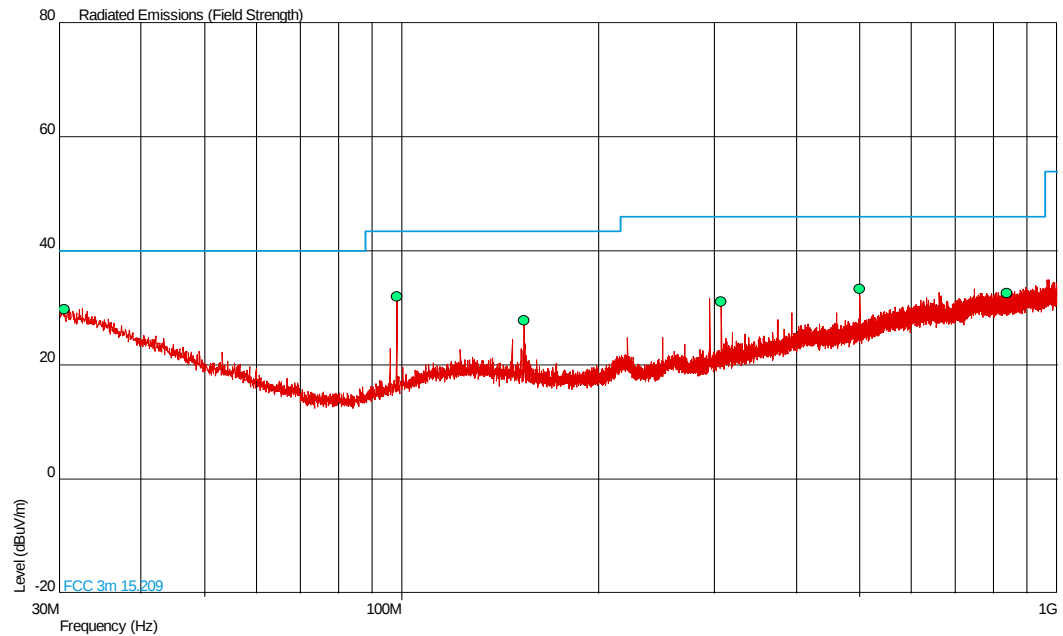5240 MHz30 MHz to 1 GHz

Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height(m)	Polarity
30.534	29.8	30.9	40.0	100	-10.2	69.1	316	2.73	Horizontal
98.302	32.1	40.3	43.5	150	-11.4	109.7	331	1.08	Vertical
153.611	27.8	24.5	43.5	150	-15.7	125.5	143	1.00	Vertical
307.213	31.1	35.9	46.0	200	-14.9	164.1	8	1.00	Horizontal
500.046	33.3	46.2	46.0	200	-12.7	153.8	13	1.00	Vertical
839.400	32.7	43.2	46.0	200	-13.3	156.8	293	1.00	Vertical