



FCC ID: YZKSMCWBR14N5

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Edgecore Networks Corporation

300 Mbps 4-port Wireless Broadband Router

Model No.: SMCWBR14-N5

FCC ID: YZKSMCWBR14N5

Prepared for : Edgecore Networks Corporation
No.1, Creation Rd.3, Hsinchu Science Park, Hsinchu,
30077, Taiwann, R.O.C

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F11139
Date of Test : Jun.27~Jul.08, 2011
Date of Report : Jul.12, 2011

TABLE OF CONTENTS

| <u>Description</u> | <u>Page</u> |
|---|-------------|
| 1. SUMMARY OF STANDARDS AND RESULTS..... | 1-1 |
| 1.1. Description of Standards and Results | 1-1 |
| 2. GENERAL INFORMATION | 2-1 |
| 2.1. Description of Device (EUT) | 2-1 |
| 2.2. Test Information..... | 2-2 |
| 2.3. Tested Supporting System Details | 2-3 |
| 2.4. Block diagram of connection between the EUT and simulators | 2-3 |
| 2.5. Test Facility | 2-4 |
| 2.6. Measurement Uncertainty (95% confidence levels, k=2) | 2-5 |
| 3. POWER LINE CONDUCTED EMISSION TEST | 3-1 |
| 3.1. Test Equipments..... | 3-1 |
| 3.2. Block Diagram of Test Setup..... | 3-1 |
| 3.3. Power Line Conducted Emission Test Limits..... | 3-1 |
| 3.4. Configuration of EUT on Test | 3-2 |
| 3.5. Operating Condition of EUT..... | 3-2 |
| 3.6. Test Procedure..... | 3-2 |
| 3.7. Power Line Conducted Emission Test Results | 3-2 |
| 4. RADIATED EMISSION TEST | 4-1 |
| 4.1. Test Equipment | 4-1 |
| 4.2. Block Diagram of Test Setup..... | 4-1 |
| 4.3. Radiated Emission Limit..... | 4-2 |
| 4.4. EUT Configuration on Test..... | 4-3 |
| 4.5. Operating Condition of EUT..... | 4-3 |
| 4.6. Test Procedure..... | 4-3 |
| 4.7. Radiated Emission Test Results | 4-4 |
| 5. CONDUCTED SPURIOUS EMISSIONS..... | 5-1 |
| 5.1. Test Equipment | 5-1 |
| 5.2. Limit..... | 5-1 |
| 5.3. Test Procedure..... | 5-1 |
| 5.4. Test result..... | 5-1 |
| 6. BAND EDGE COMPLIANCE TEST | 6-1 |
| 6.1. Test Equipment | 6-1 |
| 6.2. Limit..... | 6-1 |
| 6.3. Test Produce | 6-1 |
| 6.4. Test Results | 6-1 |
| 7. 6dB Bandwidth Test..... | 7-1 |
| 7.1. Test Equipment | 7-1 |
| 7.2. Limit..... | 7-1 |
| 7.3. Test Procedure..... | 7-1 |
| 7.4. Test Results | 7-1 |
| 8. OUTPUT POWER TEST..... | 8-1 |
| 8.1. Test Equipment | 8-1 |
| 8.2. Limit (FCC Part 15C 15.247 b(3))..... | 8-1 |
| 8.3. Test Procedure..... | 8-1 |
| 8.4. Test Results | 8-2 |
| 9. POWER SPECTRAL DENSITY TEST | 9-1 |
| 9.1. Test Equipment | 9-1 |

| | | |
|------------|--|-------------|
| 9.2. | Limit..... | 9-1 |
| 9.3. | Test Procedure..... | 9-1 |
| 9.4. | Test Results | 9-2 |
| 10. | ANTENNA REQUIREMENT | 10-1 |
| 10.1. | STANDARD APPLICABLE..... | 10-1 |
| 10.2. | ANTENNA CONNECTED CONSTRUCTION | 10-1 |
| 11. | MPE ESTIMATION..... | 11-1 |
| 11.1. | Limit for General Population/ Uncontrolled Exposures | 11-1 |
| 11.2. | 2, Estimation Result | 11-1 |
| 12. | DEVIATION TO TEST SPECIFICATIONS..... | 12-1 |
| 13. | PHOTOGRAPH OF TEST | 13-1 |
| 13.1. | Photos of Power Line Conducted Emission Test | 13-1 |
| 13.2. | Photos of Radiated Emission Test..... | 13-2 |
| 14. | PHOTOS OF THE EUT..... | 14-1 |

FCC ID: YZKSMCWBR14N5

TEST REPORT CERTIFICATION

Applicant : Edgecore Networks Corporation
Manufacturer : Edgecore Networks Corporation
EUT Description : 300 Mbps 4-port Wireless Broadband Router
FCC ID : YZKSMCWBR14N5
(A) MODEL NO. : SMCWBR14-N5
(B) SERIAL NO. : N/A
(C) POWER SUPPLY : DC 9V
(D) TEST VOLTAGE : DC 9V From Adapter Input, AC 120V/60Hz

Tested for comply with:
FCC Rules and Regulations Part 15 Subpart C: 2008

Test procedure used:
ANSI C63.10:2009

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. This report contains data that are not covered by the NVLAP accreditation. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jun.27~Jul.08, 2011 Report of date: Jun.12, 2011

Prepared by : Blove Ye Reviewer by : Sunny Lu
Blove Ye / Assistant Sunny Lu / Senior Assistant

信華科技 (深圳) Sunny Lu Senior Assistant
Audix Technology (Shenzhen) Co., Ltd.
EMC 部門報告專用章
Stamp only for EMC Dept. Report
Signature: Ken Lu 7/4/11

Approved & Authorized Signer : Ken Lu / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

| EMISSION | | |
|-------------------------------|--|---------|
| Description of Test Item | Standard | Results |
| Power Line Conducted Emission | FCC Part 15: 15.207 ANSI C63.10: 2009 | PASS |
| Radiated Emission | FCC Part 15: 15.209 ANSI C63.10: 2009 | PASS |
| Band Edge Compliance | FCC Part 15: 15.247 ANSI C63.10: 2009 | PASS |
| Conducted spurious emissions | FCC Part 15: 15.247 ANSI C63.10: 2009 | PASS |
| 6dB Bandwidth | FCC Part 15: 15.247 ANSI C63.10: 2009 | PASS |
| Peak Output Power | FCC Part 15: 15.247 ANSI C63.10: 2009 | PASS |
| Power Spectral Density | FCC Part 15: 15.247 ANSI C63.10: 2009 | PASS |
| Antenna requirement | FCC Part 15: 15.203 | PASS |

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

| | | |
|-----------------------|---|--|
| Product Name | : | 300 Mbps 4-port Wireless Broadband Router |
| Model Number | : | SMCWBR14-N5 |
| FCC ID | : | YZKSMCWBR14N5 |
| Operation Frequency | : | IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE802.11n HT20: 2412MHz—2462MHz IEEE802.11n HT40: 2422MHz—2452MHz |
| Channel Number | : | IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7Channels |
| Modulation Technology | : | IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) |
| Antenna Assembly Gain | : | Dipole Antenna, MIMO 2x2, 5dBi Peak gain |
| Applicant | : | Edgecore Networks Corporation No.1, Creation Rd.3, Hsinchu Science Park, Hsinchu, 30077, Taiwann, R.O.C |
| Manufacturer | : | Edgecore Networks Corporation No.1, Creation Rd.3, Hsinchu Science Park, Hsinchu, 30077, Taiwann, R.O.C |
| Power Adapter | : | Manufacturer: VASATA, M/N: P090060-2B1 DC Cable: Unshielded, Detachable, 1.5m |
| Date of Test | : | Jun.27~Jul.08, 2011 |
| Date of Receipt | : | Jun.26, 2011 |
| Sample Type | : | Prototype production |

2.2. Test Information

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.

| Tested mode, channel, and data rate information | | | |
|---|-------------------------------|-------------|--------------------|
| Mode | data rate (Mbps)(see Note) | Channel | Frequency (MHz) |
| IEEE 802.11b | 11 | Low :CH1 | 2412 |
| | 11 | Middle: CH6 | 2437 |
| | 11 | High: CH11 | 2462 |
| IEEE 802.11g | 54 | Low :CH1 | 2412 |
| | 54 | Middle: CH6 | 2437 |
| | 54 | High: CH11 | 2462 |
| IEEE 802.11n HT20 | 6.5 | Low :CH1 | 2412 |
| | 6.5 | Middle: CH6 | 2437 |
| | 6.5 | High: CH11 | 2462 |
| IEEE 802.11n HT40 | 13.5 | Low :CH1 | 2422 |
| | 13.5 | Middle: CH4 | 2437 |
| | 13.5 | High: CH7 | 2452 |


Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

Note2: This device use MIMO 2X2 antennas ,all the radiated spurious emissions and band edge test were performed with two antennas transmit synchronous.

2.3. Tested Supporting System Details

| | Description | ACS No. | Manufacturer | Model | Serial Number | Approved type |
|---|-------------------|---|--------------|------------|---------------|--|
| 1 | Personal Computer | Test PC M | DELL | Studio 540 | 224XK2X | <input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID:R33002 |
| | | Power Cord: Unshielded, Detachable, 1.8m Display Card: HD3450 (DVI+VGA+HDMI) | | | | |

2.4. Block diagram of connection between the EUT and simulators

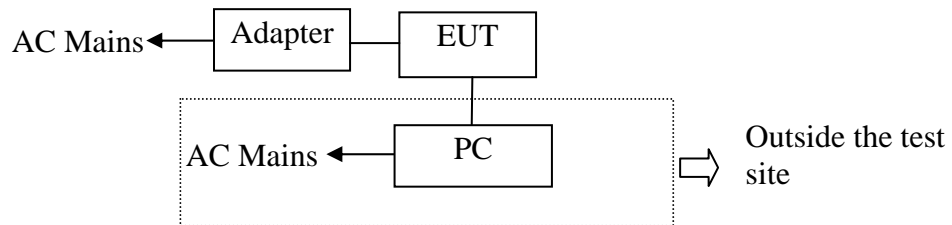

PC run test software to control EUT work in Continuous TX mode

(EUT: 300 Mbps 4-port Wireless Broadband Router)

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park, Nantou,
Shenzhen, Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Valid Date: Mar.31, 2012

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Valid Date: Dec.30, 2012

EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: Jul. 02, 2011

: Accredited by DATech, German
Registration Number: DAT-P-091/99-01
Valid Date: Feb.01, 2014

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2012

2.6.Measurement Uncertainty (95% confidence levels, k=2)


| Test Item | Uncertainty |
|---|--------------------------------|
| Uncertainty for Conduction emission test in No. 1 Conduction | 3.2 dB(150kHz to 30MHz) |
| Uncertainty for Radiation Emission test in 3m chamber | 3.6 dB(30~200MHz, Polarize: H) |
| | 3.7 dB(30~200MHz, Polarize: V) |
| | 4.0 dB(200M~1GHz, Polarize: H) |
| | 3.7 dB(200M~1GHz, Polarize: V) |
| Uncertainty for Radiated Spurious Emission test in RF chamber | 3.57dB |
| Uncertainty for Conduction Spurious emission test | 2.00 dB |
| Uncertainty for Output power test | 0.73 dB |
| Uncertainty for Power density test | 2.00 dB |
| Uncertainty for Frequency range test | 7×10^{-8} |
| Uncertainty for Bandwidth test | 83 kHz |
| Uncertainty for DC power test | 0.038 % |
| Uncertainty for test site temperature and humidity | 0.6°C |
| | 3% |

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|----------------|-----------------|-----------|---------------|------------|---------------|
| 1. | Test Receiver | Rohde & Schwarz | ESHS10 | 838693/001 | Nov.05, 10 | 1 Year |
| 2. | L.I.S.N.#1 | Rohde & Schwarz | ESH2-Z5 | 834066/011 | Nov.05, 11 | 1 Year |
| 3. | L.I.S.N.#3 | Kyoritsu | KNW-242C | 8-1920-1 | May.08, 11 | 1 Year |
| 4. | Terminator | Hubersuhner | 50Ω | No. 1 | May.08, 11 | 1 Year |
| 5. | Terminator | Hubersuhner | 50Ω | No. 2 | May.08, 11 | 1 Year |
| 6. | RF Cable | Fujikura | 3D-2W | LISN Cable 1# | May.08, 11 | 1 Year |
| 7. | Coaxial Switch | Anritsu | MP59B | M55367 | May.08, 11 | 1 Year |
| 8. | Passive Probe | Rohde & Schwarz | ESH2-Z3 | 299.7810.52 | May.08, 11 | 1 Year |
| 9. | Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100341 | May.08, 11 | 1 Year |

3.2. Block Diagram of Test Setup

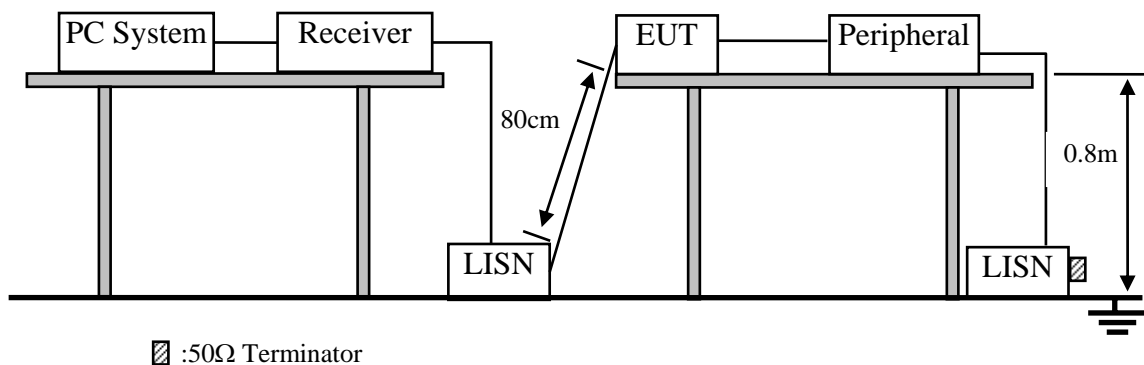

3.3. Power Line Conducted Emission Test Limits

| Frequency | Maximum RF Line Voltage | |
|-----------------|----------------------------|-------------------------|
| | Quasi-Peak Level dB(μV) | Average Level dB(μV) |
| 150kHz ~ 500kHz | 66 ~ 56* | 56 ~ 46* |
| 500kHz ~ 5MHz | 56 | 46 |
| 5MHz ~ 30MHz | 60 | 50 |

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. 300 Mbps 4-port Wireless Broadband Router (EUT)

Model Number : SMCWBR14-N5
Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 2.4.

3.5.2. Turned on the power of all equipment.

3.5.3. Notebook run test software to control EUT work in Tx mode.

3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#3). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2009 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

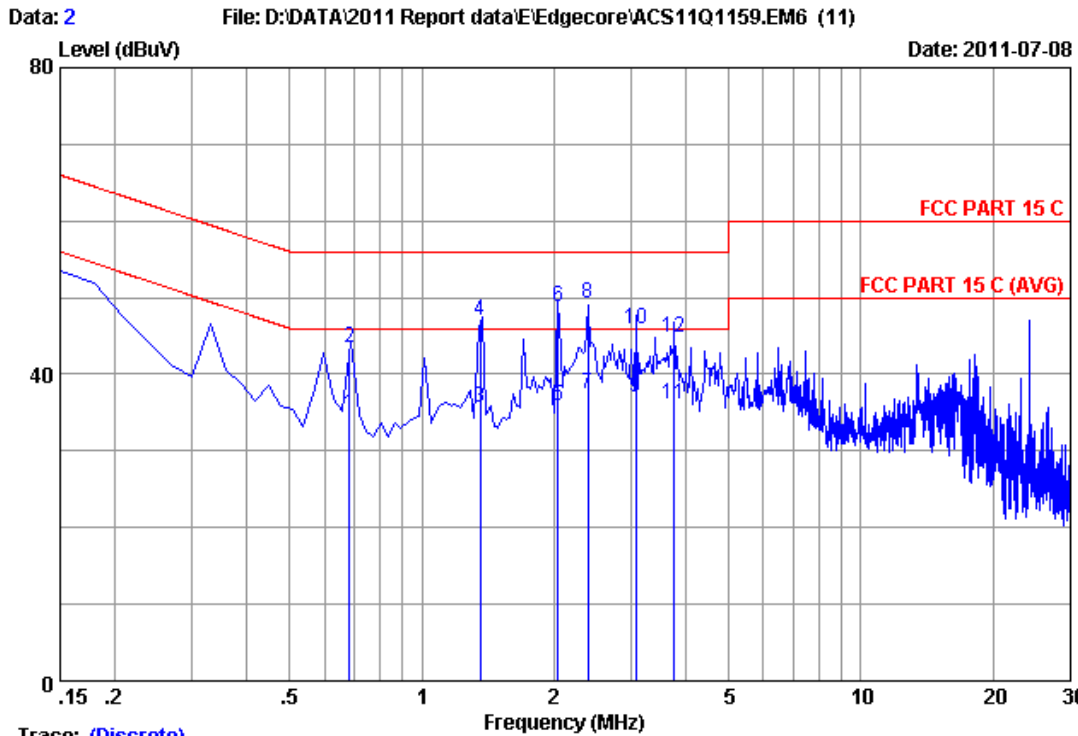


Trace: (Discrete)

Site no :1#conduction Data No :2
 Dis./Ant. :** 2010 ESH2-Z5 LINE
 Limit :FCC PART 15 C
 Env./Ins. :29.5°C/55% Engineer :Leo-Li
 EUT :300 Mbps 4-port Wireless Broadband Router
 Power Rating :DC 9V From Adapter Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:SMCWBR14-N5

| No | Freq (MHz) | LISN Factor (dB) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV) | Limits (dBuV) | Margin (dB) | Remark |
|----|------------|------------------|-----------------|----------------|-----------------------|---------------|-------------|---------|
| 1 | 0.68500 | 0.25 | 9.89 | 24.59 | 34.73 | 46.00 | 11.27 | Average |
| 2 | 0.68500 | 0.25 | 9.89 | 33.25 | 43.39 | 56.00 | 12.61 | QP |
| 3 | 1.360 | 0.23 | 9.89 | 25.51 | 35.63 | 46.00 | 10.37 | Average |
| 4 | 1.360 | 0.23 | 9.89 | 36.91 | 47.03 | 56.00 | 8.97 | QP |
| 5 | 2.040 | 0.25 | 9.91 | 25.80 | 35.96 | 46.00 | 10.04 | Average |
| 6 | 2.040 | 0.25 | 9.91 | 38.60 | 48.76 | 56.00 | 7.24 | QP |
| 7 | 2.389 | 0.25 | 9.92 | 27.30 | 37.47 | 46.00 | 8.53 | Average |
| 8 | 2.389 | 0.25 | 9.92 | 39.02 | 49.19 | 56.00 | 6.81 | QP |
| 9 | 3.075 | 0.26 | 9.93 | 26.90 | 37.09 | 46.00 | 8.91 | Average |
| 10 | 3.075 | 0.26 | 9.93 | 35.70 | 45.89 | 56.00 | 10.11 | QP |
| 11 | 3.762 | 0.27 | 9.94 | 25.85 | 36.06 | 46.00 | 9.94 | Average |
| 12 | 3.762 | 0.27 | 9.94 | 34.58 | 44.79 | 56.00 | 11.21 | QP |

Remarks: 1. Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

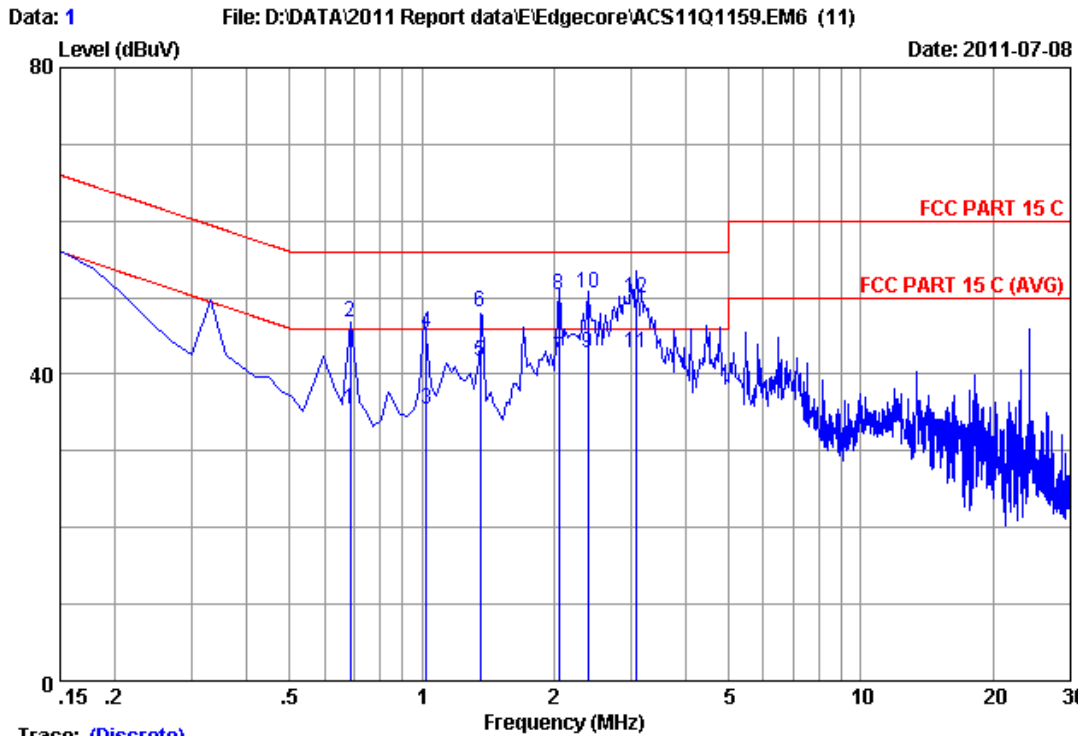

Trace: (Discrete)

Site no :1#conduction Data No :1
 Dis./Ant. :** 2010 ESH2-Z5 NEUTRAL
 Limit :FCC PART 15 C
 Env./Ins. :29.5°C/55% Engineer :Leo-Li
 EUT :300 Mbps 4-port Wireless Broadband Router
 Power Rating :DC 9V From Adapter Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:SMCWBR14-N5

| No | Freq (MHz) | LISN Factor (dB) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV) | Limits (dBuV) | Margin (dB) | Remark |
|----|------------|------------------|-----------------|----------------|-----------------------|---------------|-------------|---------|
| 1 | 0.68730 | 0.24 | 9.89 | 25.24 | 35.37 | 46.00 | 10.63 | Average |
| 2 | 0.68730 | 0.24 | 9.89 | 36.58 | 46.71 | 56.00 | 9.29 | QP |
| 3 | 1.026 | 0.25 | 9.89 | 25.19 | 35.33 | 46.00 | 10.67 | Average |
| 4 | 1.026 | 0.25 | 9.89 | 35.42 | 45.56 | 56.00 | 10.44 | QP |
| 5 | 1.360 | 0.25 | 9.89 | 31.61 | 41.75 | 46.00 | 4.25 | Average |
| 6 | 1.360 | 0.25 | 9.89 | 38.01 | 48.15 | 56.00 | 7.85 | QP |
| 7 | 2.049 | 0.26 | 9.91 | 31.90 | 42.07 | 46.00 | 3.93 | Average |
| 8 | 2.049 | 0.26 | 9.91 | 40.10 | 50.27 | 56.00 | 5.73 | QP |
| 9 | 2.389 | 0.26 | 9.92 | 32.57 | 42.75 | 46.00 | 3.25 | Average |
| 10 | 2.389 | 0.26 | 9.92 | 40.50 | 50.68 | 56.00 | 5.32 | QP |
| 11 | 3.075 | 0.27 | 9.93 | 32.60 | 42.80 | 46.00 | 3.20 | Average |
| 12 | 3.075 | 0.27 | 9.93 | 39.70 | 49.90 | 56.00 | 6.10 | QP |

Remarks: 1. Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

Frequency rang: 30~1000MHz


| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|----------------|-----------------|-----------|-----------------|------------|---------------|
| 1 | 3#Chamber | AUDIX | N/A | N/A | Dec.06,10 | 1 Year |
| 2 | EMI Spectrum | Agilent | E4407B | MY41440292 | May.08, 11 | 1 Year |
| 3 | Test Receiver | Rohde & Schwarz | ESVS10 | 834468/011 | May.08, 11 | 1 Year |
| 4 | Amplifier | HP | 8447D | 2648A04738 | May.08, 11 | 1 Year |
| 5 | Bilog Antenna | Schaffner | CBL6111C | 2598 | Oct.26, 10 | 1 Year |
| 6 | RF Cable | MIYAZAKI | 8D-FB | 3# Chamber No.1 | May.08, 11 | 1 Year |
| 7 | Coaxial Switch | Anritsu | MP59B | M73989 | May.08, 11 | 1 Year |

Frequency rang: above 1000MHz


| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|--------------|-------------|------------|------------|---------------|
| 1 | Spectrum Analyzer | Agilent | E4407B | MY41440292 | May.08, 11 | 1 Year |
| 2 | Horn Antenna | EMCO | 3115 | 9607-4877 | May.25, 11 | 1.5 Year |
| 3 | Amplifier | Agilent | 8449B | 3008A00863 | May.08, 11 | 1 Year |
| 4 | RF Cable | Hubersuhner | SUCOFLEX102 | 28622/2 | May.08, 11 | 1 Year |
| 5 | RF Cable | Hubersuhner | SUCOFLEX102 | 29091/2 | May.08, 11 | 1 Year |

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

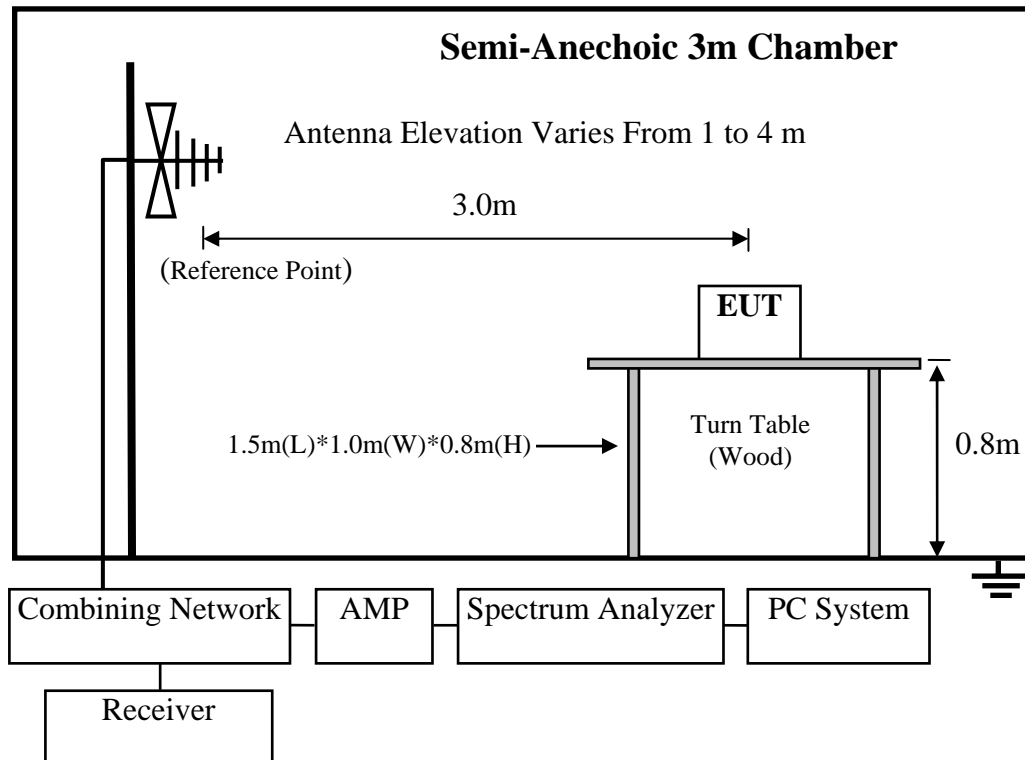

For frequency range 1GHz-25GHz

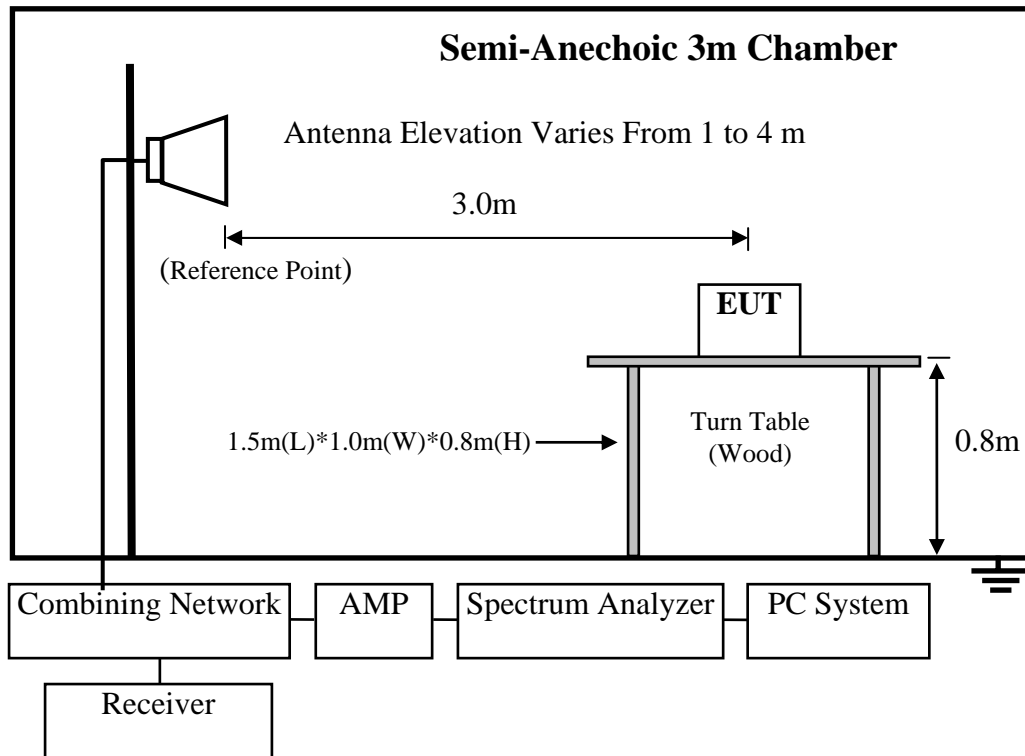

4.3. Radiated Emission Limit

4.3.1.15.209 limits

| FREQUENCY MHz | DISTANCE Meters | FIELD STRENGTHS LIMIT | |
|------------------|--------------------|---|----------|
| | | µV/m | dB(µV)/m |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| 960 ~ 1000 | 3 | 500 | 54.0 |
| Above 1000 | 3 | 74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average) | |

- Remark :
- (1) Emission level dBµV = 20 log Emission level µV/m
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2.15.205 Restricted bands of operation

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4.EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

4.5.Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 4.2.

4.6.Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.


4.7. Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


Frequency: 30MHz~1GHz

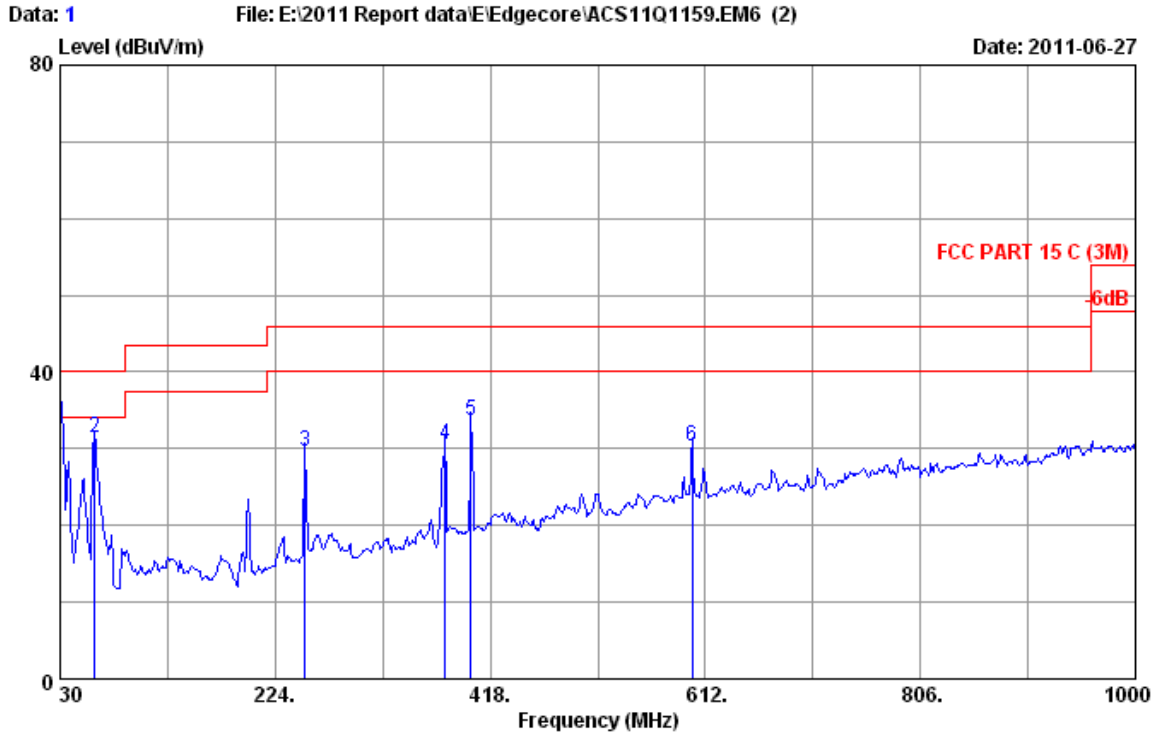

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2010 CBL6111C 2598 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Leo_Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power rating : DC 9V From Adapter input AC 120V/60Hz
 Test Mode : Tx Mode
 SMCWBR14-N5

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Emission Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|-------------------------|-------------------------|-----------------|-------------|--------|
| 1 | 30.000 | 20.00 | 0.58 | 14.81 | 35.39 | 40.00 | 4.61 | QP |
| 2 | 61.040 | 6.00 | 0.90 | 24.52 | 31.42 | 40.00 | 8.58 | QP |
| 3 | 251.160 | 12.90 | 2.43 | 14.32 | 29.65 | 46.00 | 16.35 | QP |
| 4 | 377.260 | 15.64 | 3.25 | 11.70 | 30.59 | 46.00 | 15.41 | QP |
| 5 | 400.540 | 16.41 | 3.34 | 13.98 | 33.73 | 46.00 | 12.27 | QP |
| 6 | 600.360 | 19.90 | 4.50 | 5.92 | 30.32 | 46.00 | 15.68 | QP |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

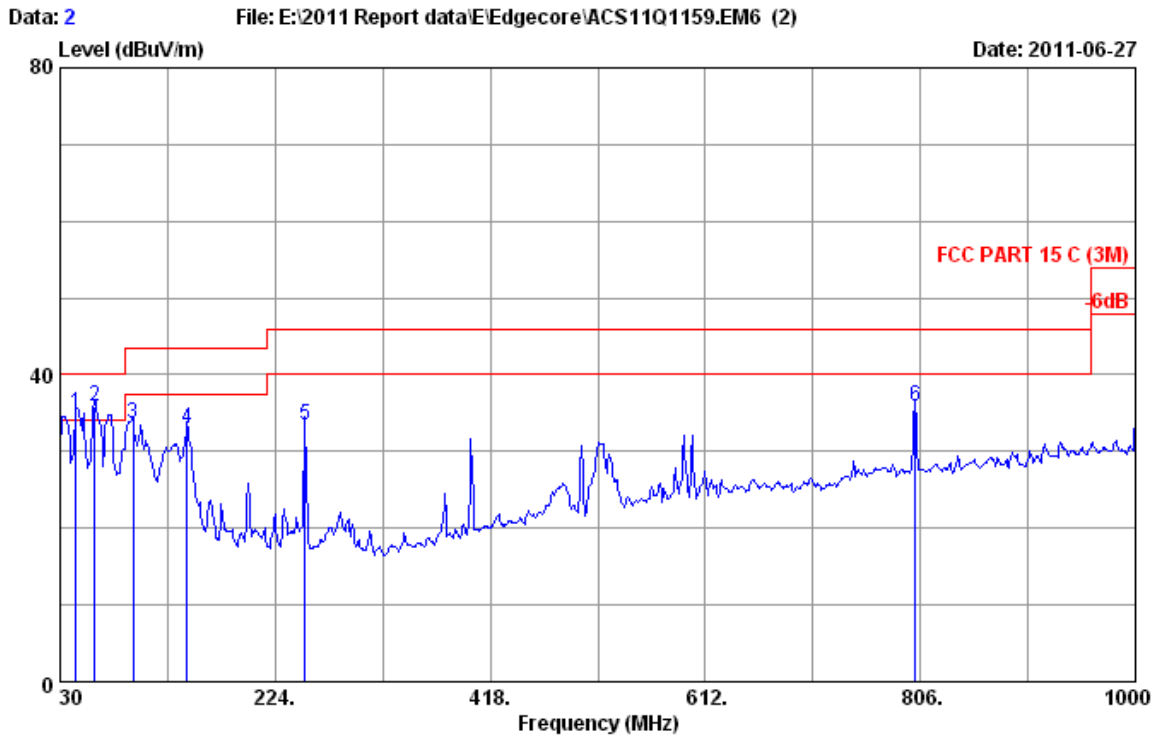


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2010 CBL6111C 2598 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Leo_Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power rating : DC 9V From Adapter input AC 120V/60Hz
 Test Mode : Tx Mode
 SMCWBR14-N5

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 44.550 | 11.80 | 0.77 | 22.39 | 34.96 | 40.00 | 5.04 | QP |
| 2 | 61.040 | 6.00 | 0.90 | 28.96 | 35.86 | 40.00 | 4.14 | QP |
| 3 | 95.960 | 9.84 | 1.14 | 22.59 | 33.57 | 43.50 | 9.93 | QP |
| 4 | 144.460 | 11.92 | 1.46 | 19.51 | 32.89 | 43.50 | 10.61 | QP |
| 5 | 251.160 | 12.90 | 2.43 | 18.13 | 33.46 | 46.00 | 12.54 | QP |
| 6 | 801.150 | 22.00 | 5.50 | 8.30 | 35.80 | 46.00 | 10.20 | QP |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

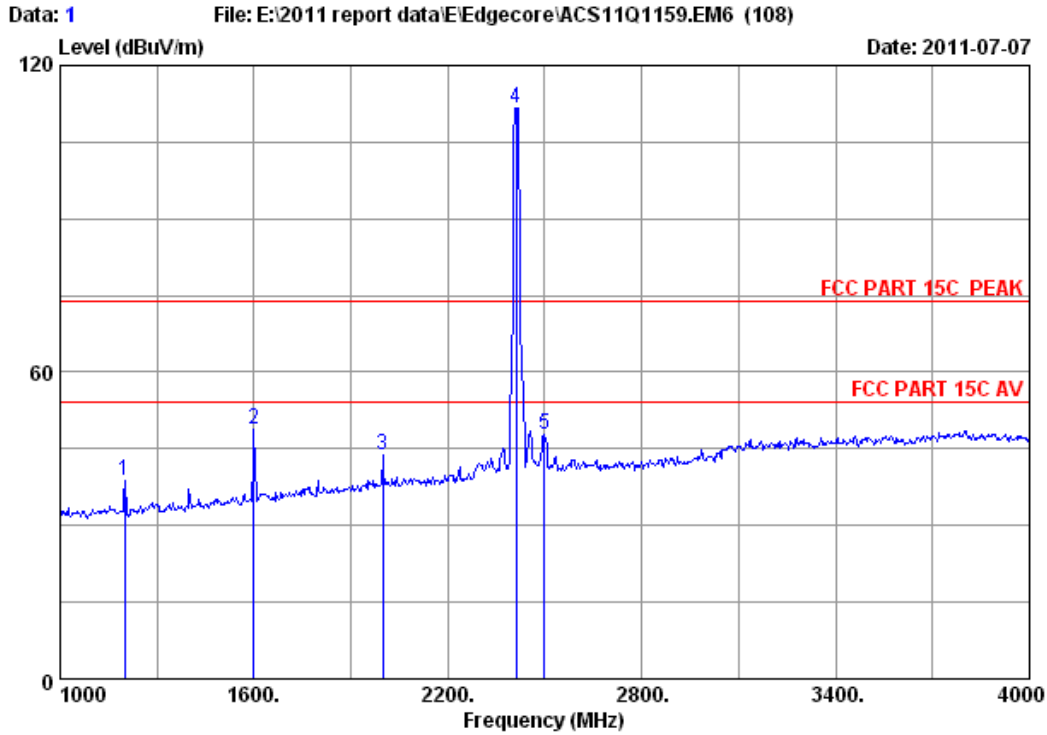


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Emission Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|-------------------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 45.23 | 38.66 | 74.00 | 35.34 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 53.00 | 48.93 | 74.00 | 25.07 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 44.52 | 43.65 | 74.00 | 30.35 | Peak |
| 4 | 2412.000 | 29.45 | 7.43 | 36.62 | 111.54 | 111.80 | 74.00 | -37.80 | Peak |
| 5 | 2500.000 | 29.50 | 7.62 | 36.60 | 47.32 | 47.84 | 74.00 | 26.16 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

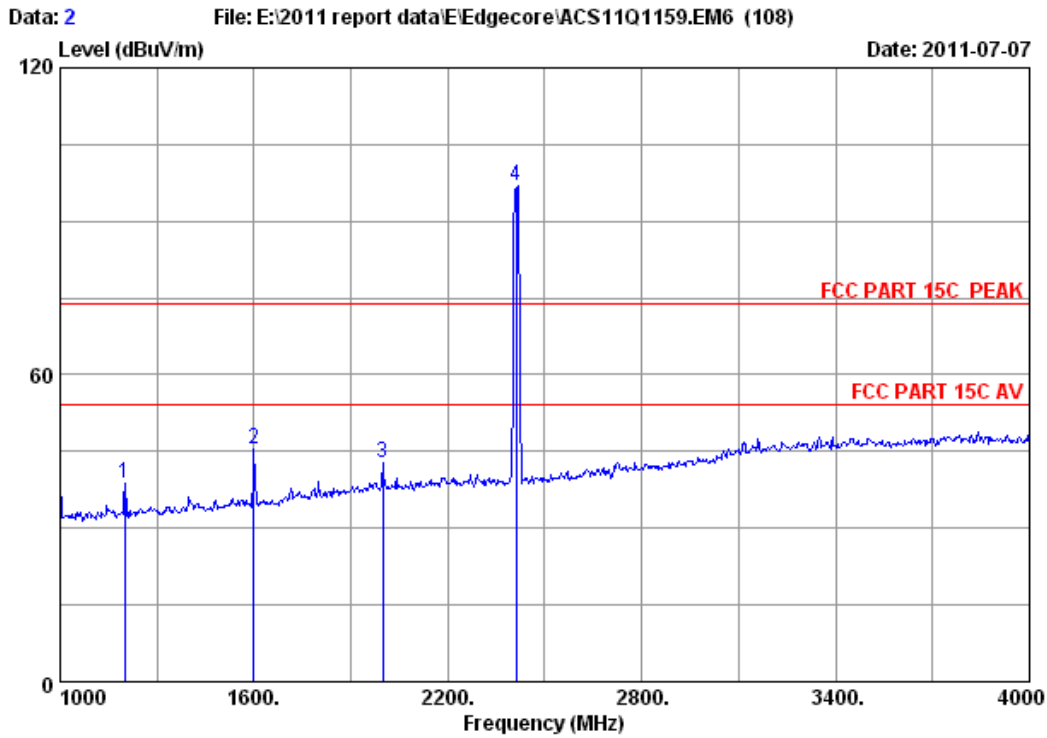


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 45.30 | 38.73 | 74.00 | 35.27 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 49.51 | 45.44 | 74.00 | 28.56 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.78 | 42.91 | 74.00 | 31.09 | Peak |
| 4 | 2412.000 | 29.45 | 7.43 | 36.62 | 96.62 | 96.88 | 74.00 | -22.88 | Peak |

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

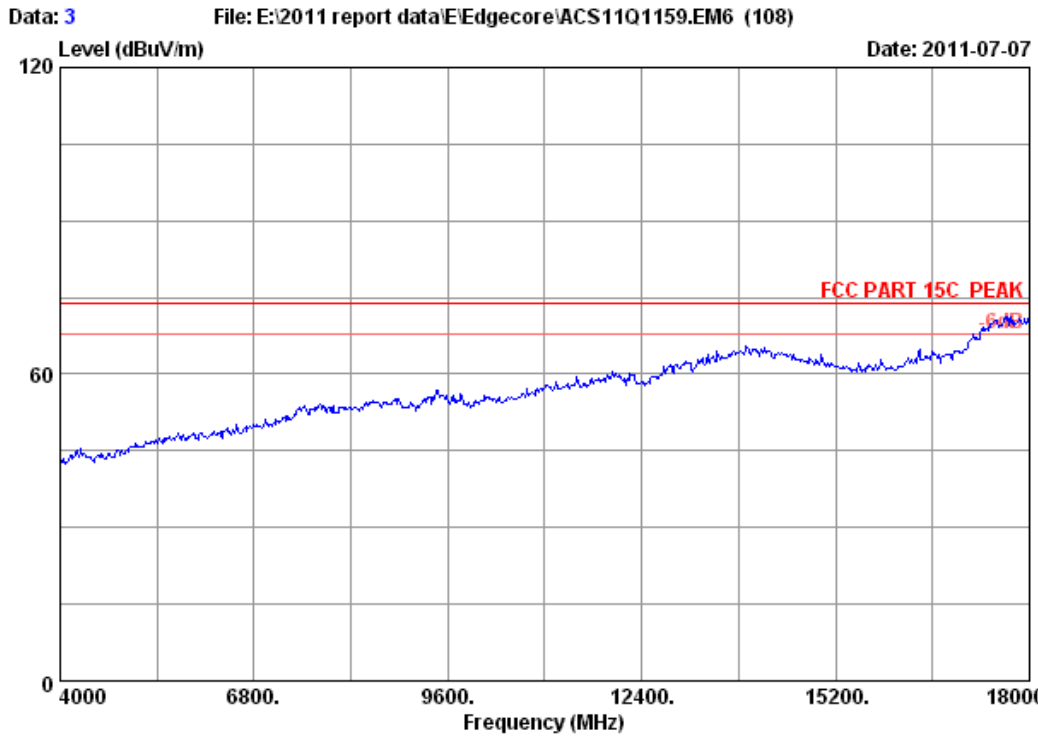

| | | | |
|-------------|---|-------------|----------|
| Site no. | : 3m Chamber | Data no. : | 3 |
| Dis. / Ant. | : 3m 3115(0911) | Ant. pol. : | VERTICAL |
| Limit | : FCC PART 15C PEAK | | |
| Env. / Ins. | : 23°C/54% | Engineer : | Leo-Li |
| EUT | : 300 Mbps 4-port Wireless Broadband Router | | |
| Power | : DC 9V From Adapter Input AC 120V/60Hz | | |
| Test mode | : IEEE802.11b CH1 2412MHz Tx | | |
| M/N | : SMCWBR14-N5 | | |

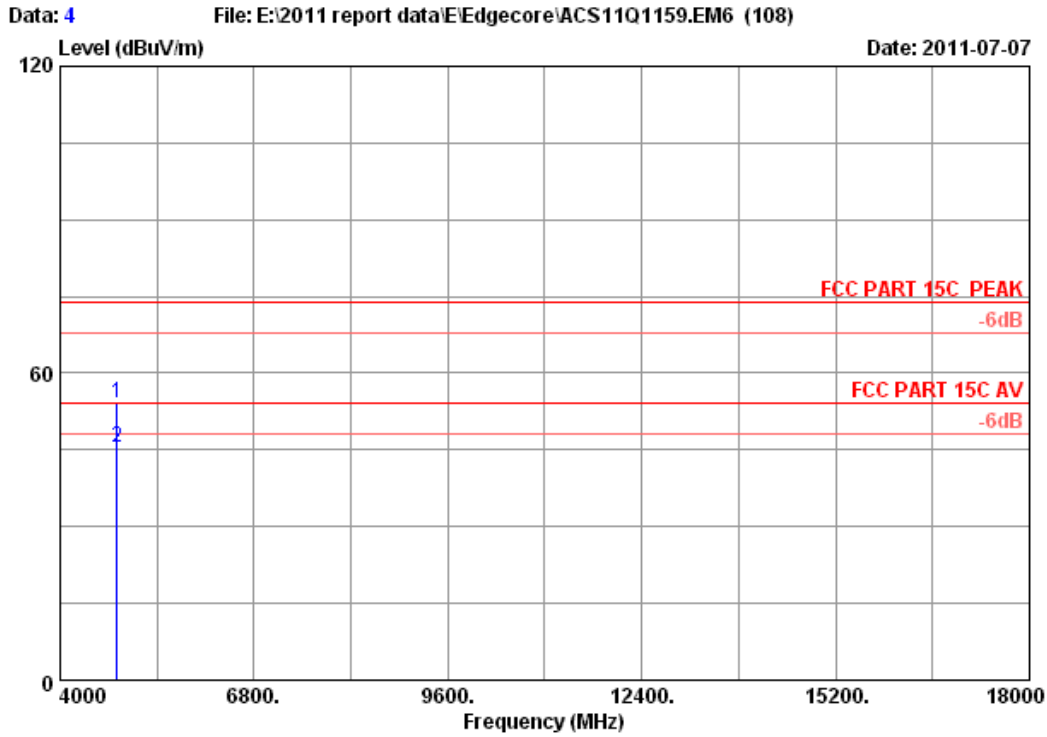


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : SMCWBR14-N5


| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 4824.000 | 34.32 | 10.64 | 35.08 | 44.21 | 54.09 | 74.00 | 19.91 | Peak |
| 2 | 4824.000 | 34.32 | 10.64 | 35.08 | 35.69 | 45.57 | 54.00 | 8.43 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

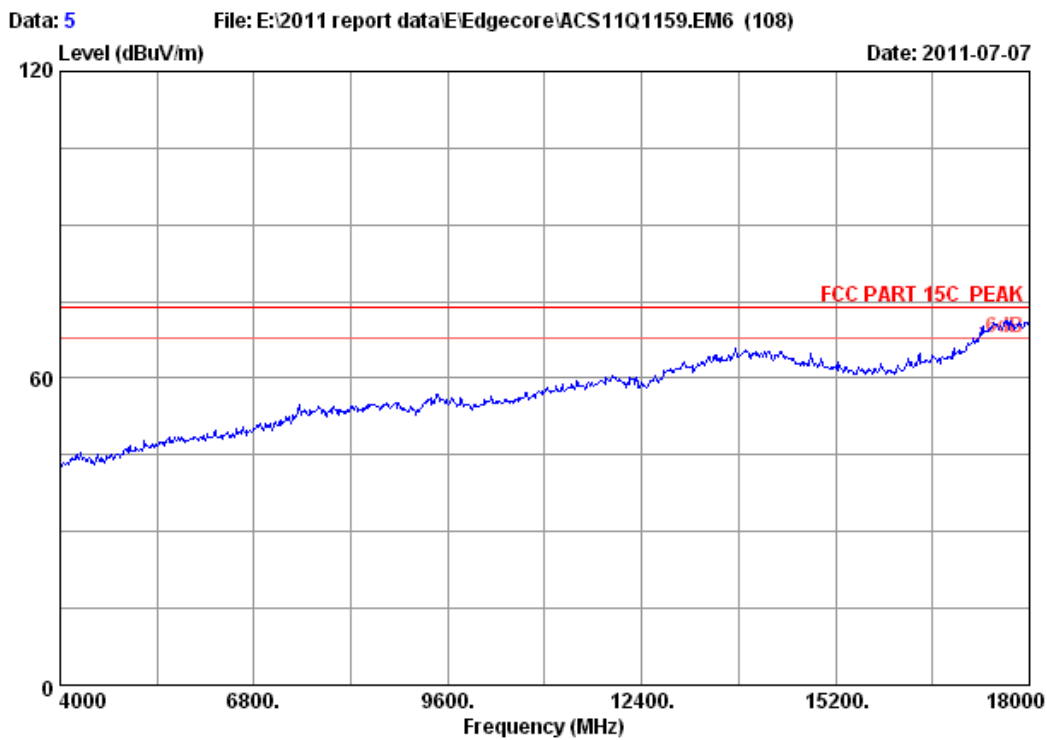

| | | | |
|-------------|---|-------------|------------|
| Site no. | : 3m Chamber | Data no. : | 5 |
| Dis. / Ant. | : 3m 3115(0911) | Ant. pol. : | HORIZONTAL |
| Limit | : FCC PART 15C PEAK | | |
| Env. / Ins. | : 23°C/54% | Engineer : | Leo-Li |
| EUT | : 300 Mbps 4-port Wireless Broadband Router | | |
| Power | : DC 9V From Adapter Input AC 120V/60Hz | | |
| Test mode | : IEEE802.11b CH1 2412MHz Tx | | |
| M/N | : SMCWBR14-N5 | | |

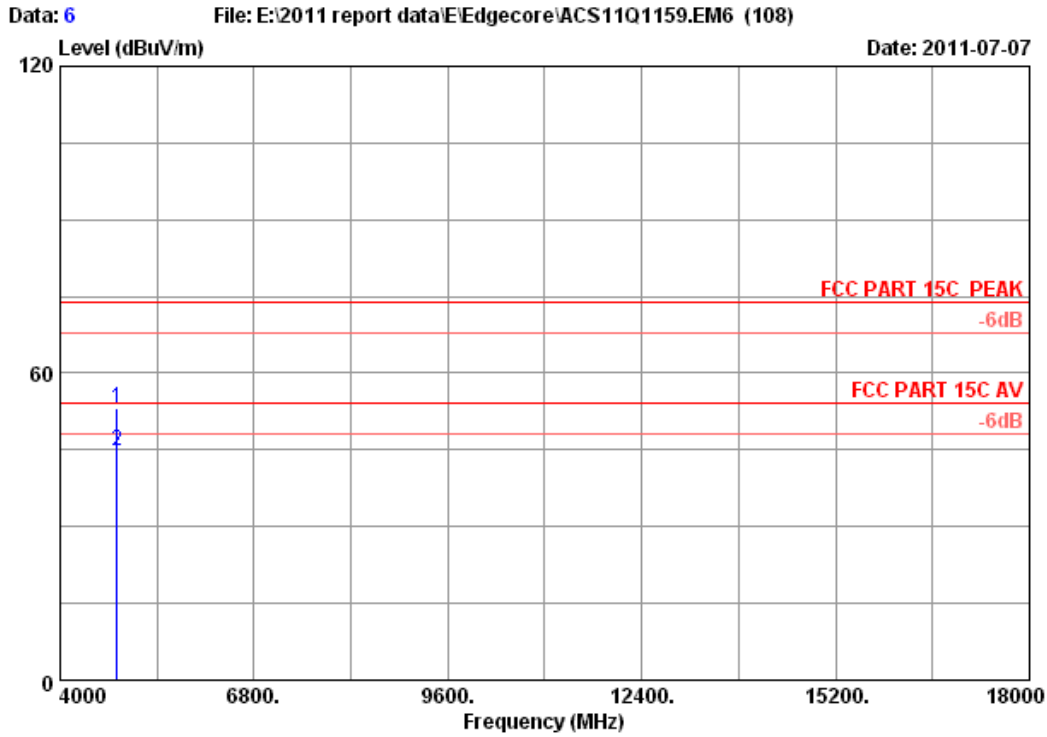

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark | |
|---|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|---------|
| 1 | 4824.000 | 34.32 | 10.64 | 35.08 | 43.20 | 53.08 | 74.00 | 20.92 | Peak |
| 2 | 4824.000 | 34.32 | 10.64 | 35.08 | 34.99 | 44.87 | 54.00 | 9.13 | Average |

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

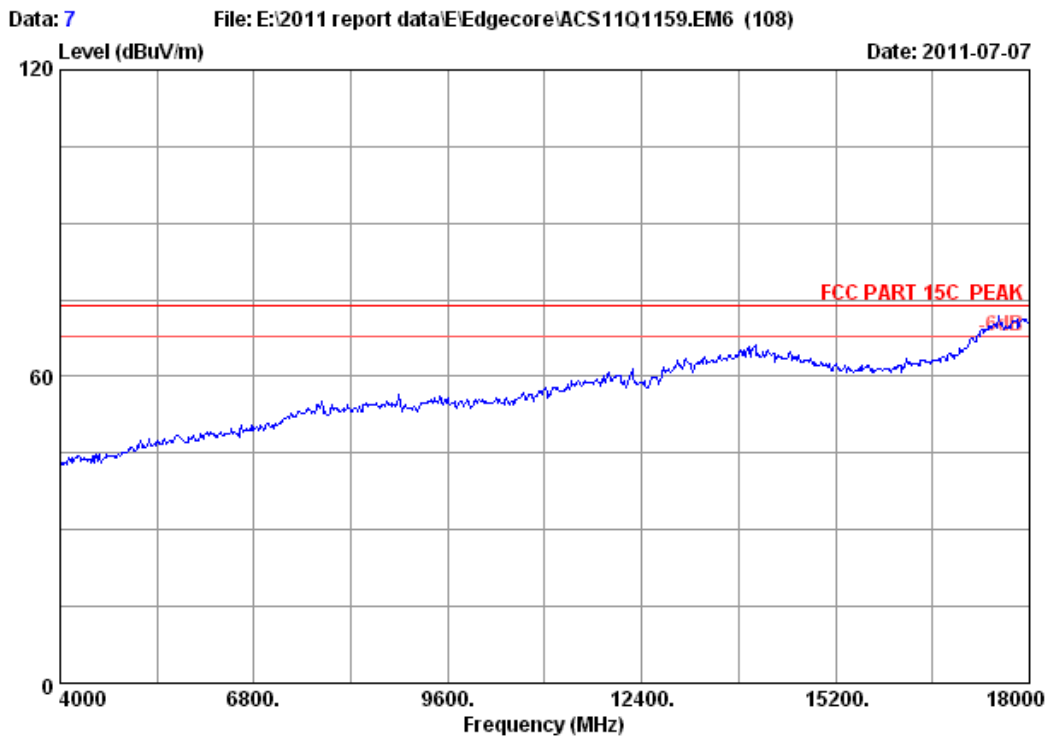

Site no. : 3m Chamber Data no. : 7
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH6 2437MHz Tx
M/N : SMCWBR14-N5

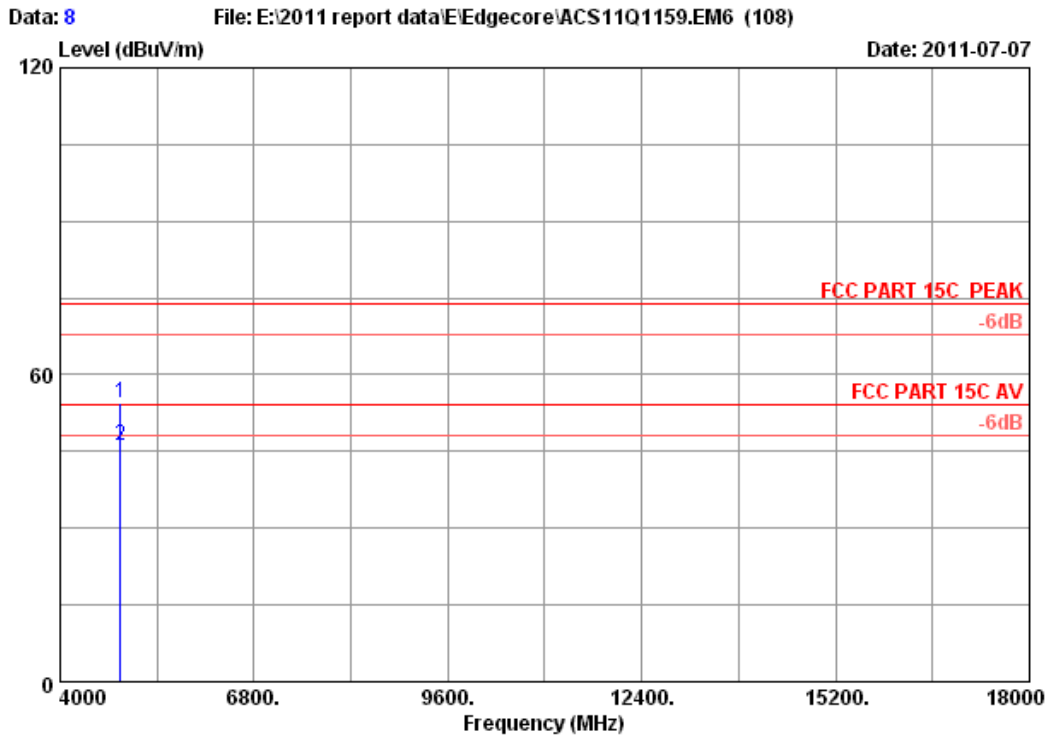

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH6 2437MHz Tx
 M/N : SMCWBR14-N5


| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 4874.000 | 34.41 | 10.69 | 35.03 | 44.27 | 54.34 | 74.00 | 19.66 | Peak |
| 2 | 4874.000 | 34.41 | 10.69 | 35.03 | 36.10 | 46.17 | 54.00 | 7.83 | Average |

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

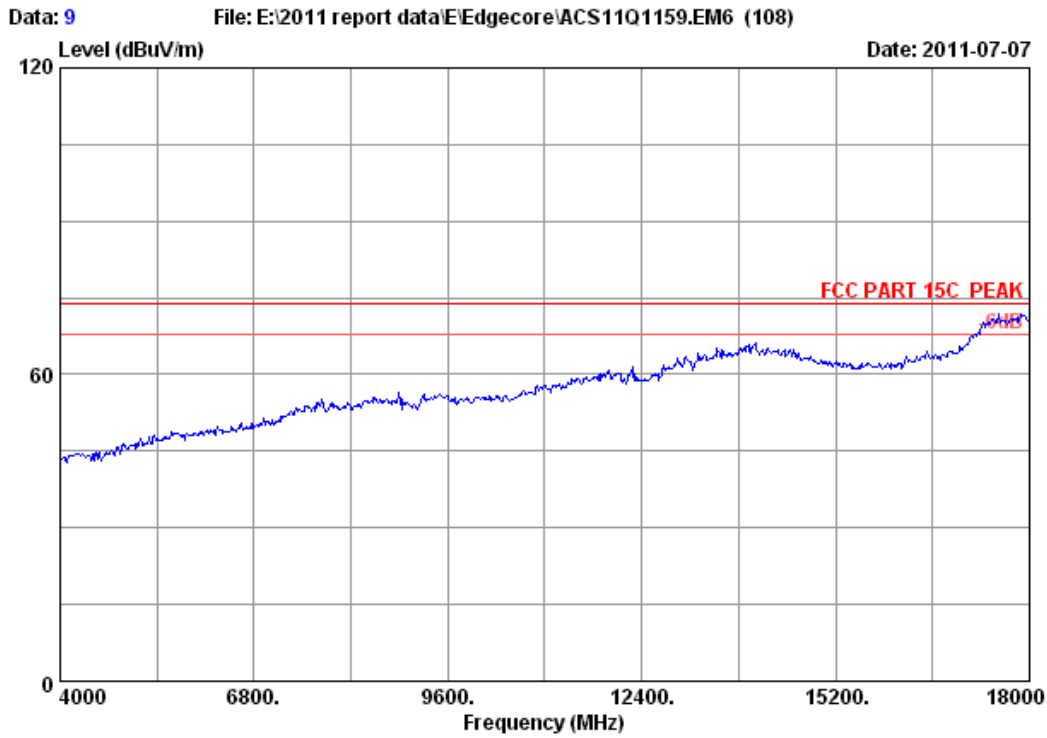


Site no. : 3m Chamber Data no. : 9
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH6 2437MHz Tx
M/N : SMCWBR14-N5

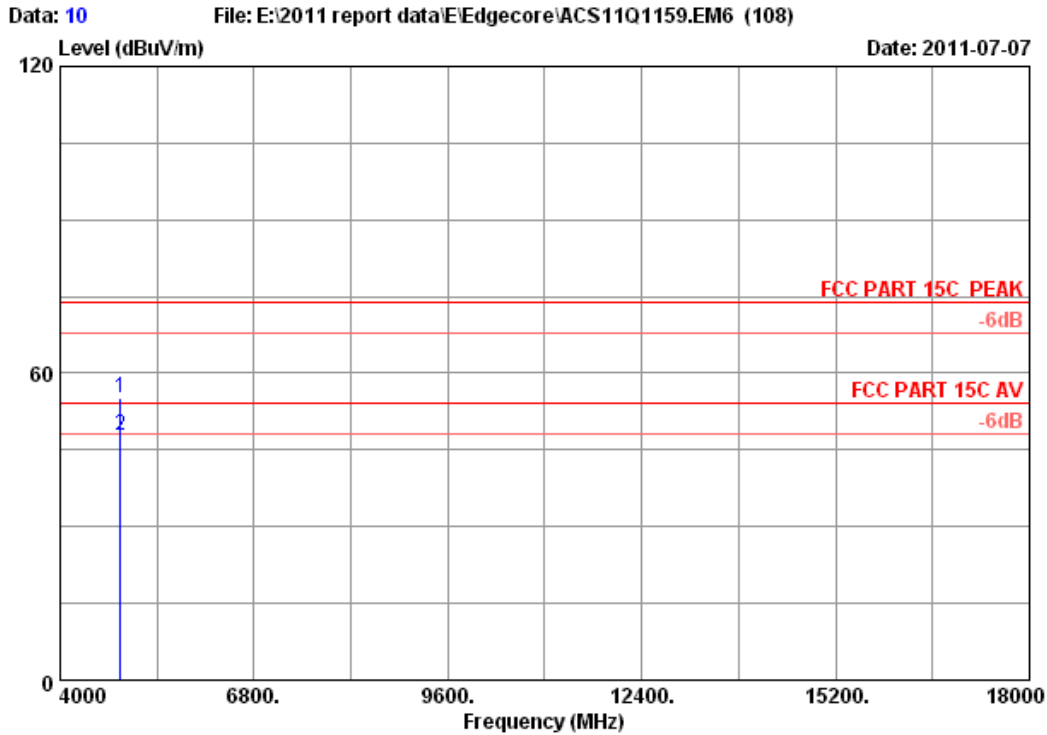

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH6 2437MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4874.000 | 34.41 | 10.69 | 35.03 | 45.21 | 55.28 | 74.00 | 18.72 | Peak |
| 2 | 4874.000 | 34.41 | 10.69 | 35.03 | 37.58 | 47.65 | 54.00 | 6.35 | Average |

- Remarks:
1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

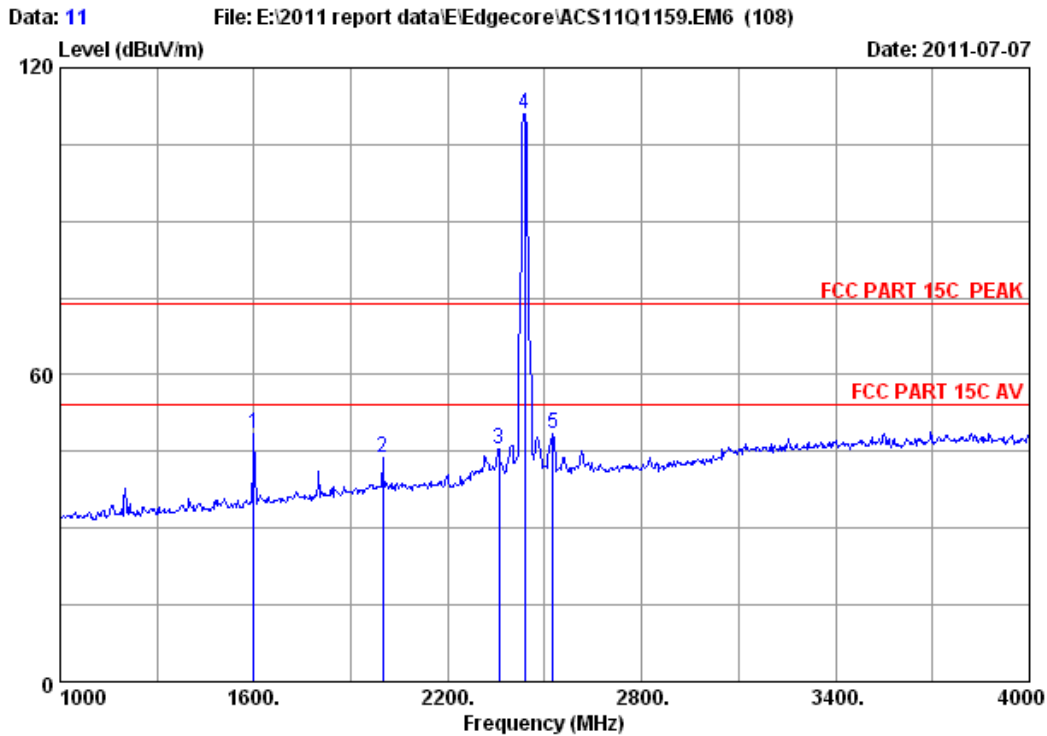


Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH6 2437MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1600.000 | 26.96 | 5.91 | 36.94 | 52.50 | 48.43 | 74.00 | 25.57 | Peak |
| 2 | 1999.000 | 29.20 | 6.63 | 36.70 | 44.62 | 43.75 | 74.00 | 30.25 | Peak |
| 3 | 2359.000 | 29.42 | 7.35 | 36.63 | 45.18 | 45.32 | 74.00 | 28.68 | Peak |
| 4 | 2437.000 | 29.47 | 7.46 | 36.61 | 110.78 | 111.10 | 74.00 | -37.10 | Peak |
| 5 | 2524.000 | 29.67 | 7.65 | 36.59 | 47.67 | 48.40 | 74.00 | 25.60 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

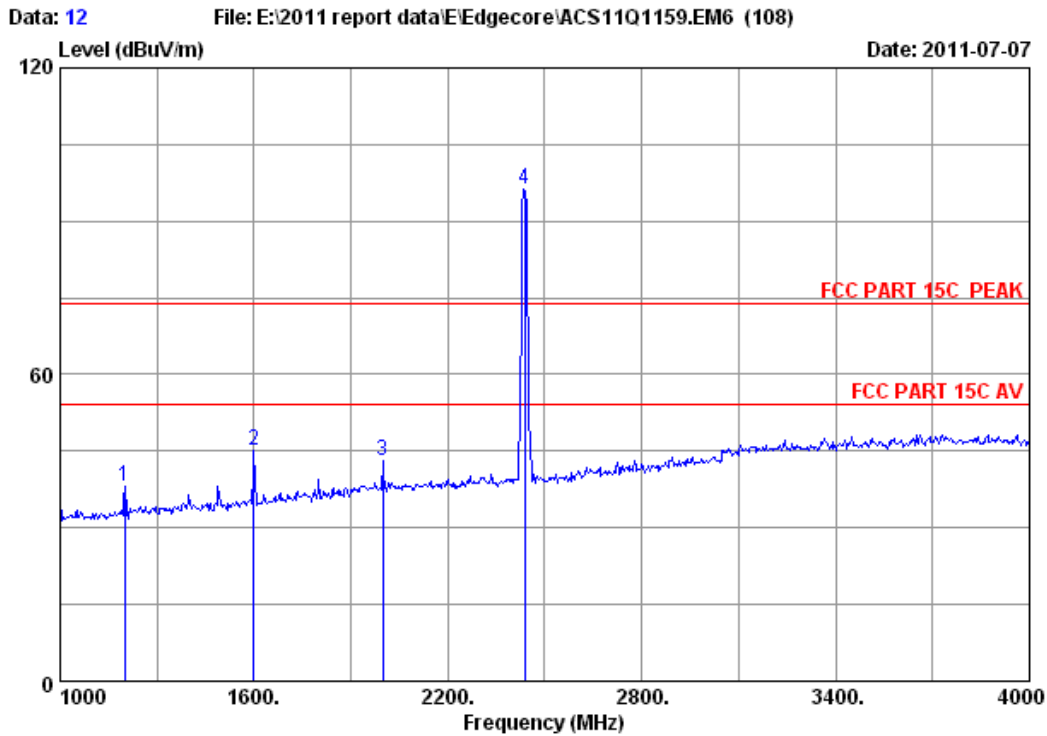


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH6 2437MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.70 | 38.13 | 74.00 | 35.87 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 49.33 | 45.26 | 74.00 | 28.74 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.84 | 42.97 | 74.00 | 31.03 | Peak |
| 4 | 2437.000 | 29.47 | 7.46 | 36.61 | 95.95 | 96.27 | 74.00 | -22.27 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

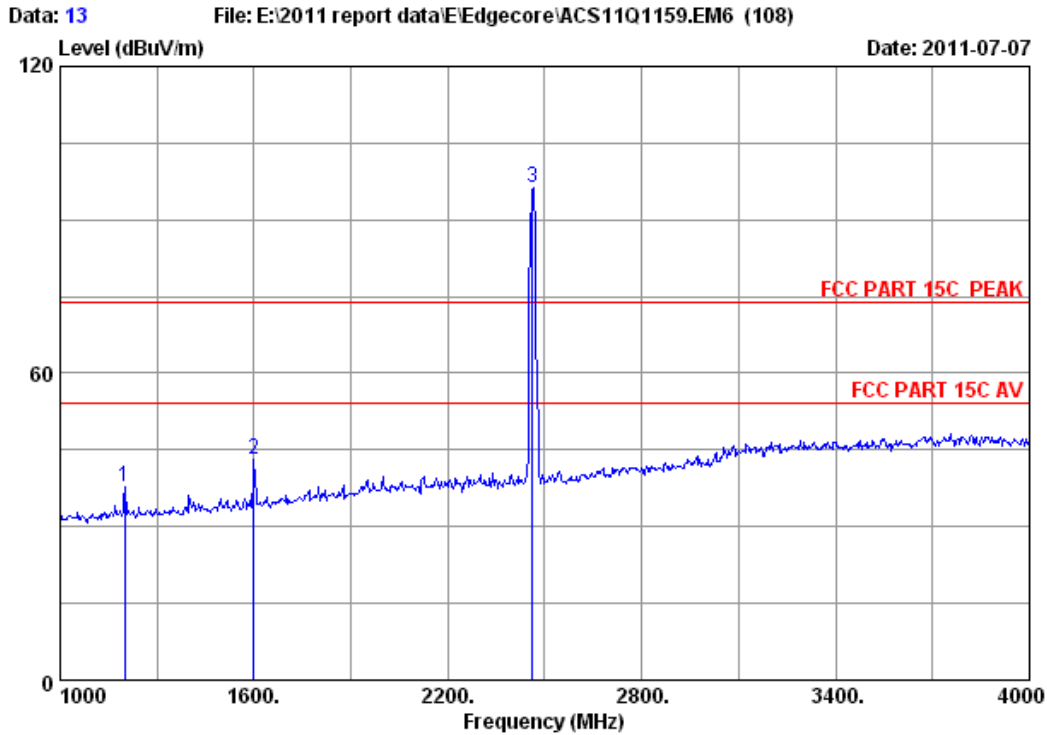


Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.26 | 37.69 | 74.00 | 36.31 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 47.24 | 43.17 | 74.00 | 30.83 | Peak |
| 3 | 2462.000 | 29.48 | 7.54 | 36.61 | 95.94 | 96.35 | 74.00 | -22.35 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

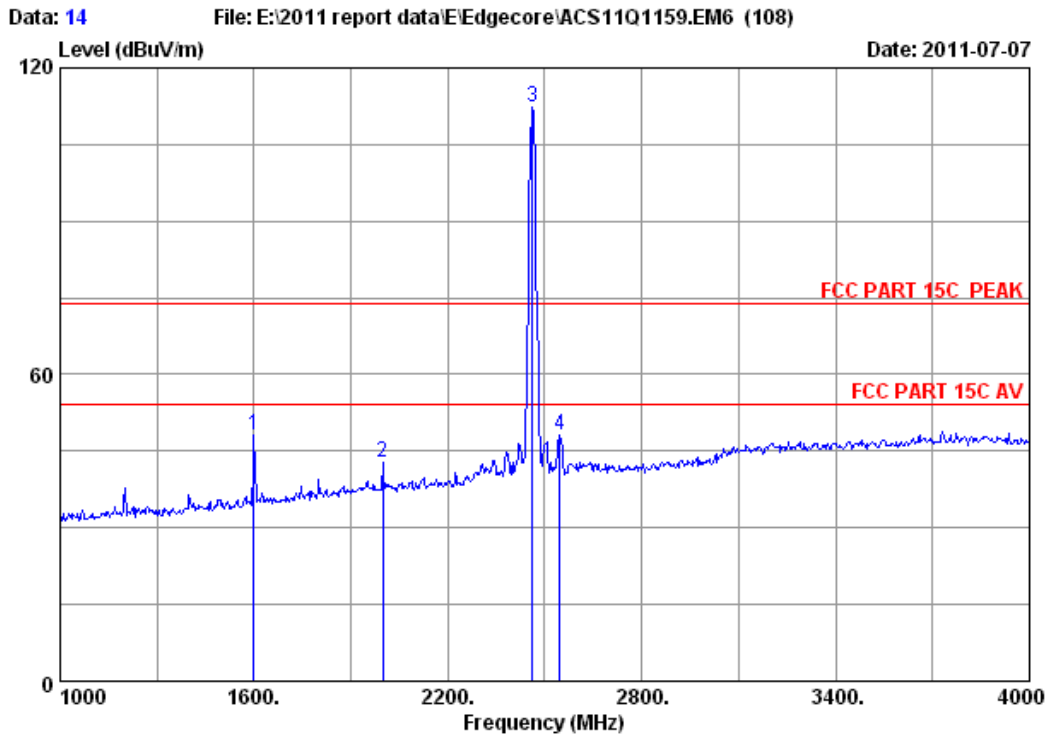

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1600.000 | 26.96 | 5.91 | 36.94 | 52.09 | 48.02 | 74.00 | 25.98 | Peak |
| 2 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.65 | 42.78 | 74.00 | 31.22 | Peak |
| 3 | 2462.000 | 29.48 | 7.54 | 36.61 | 111.75 | 112.16 | 74.00 | -38.16 | Peak |
| 4 | 2545.000 | 29.75 | 7.69 | 36.59 | 47.19 | 48.04 | 74.00 | 25.96 | Peak |

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

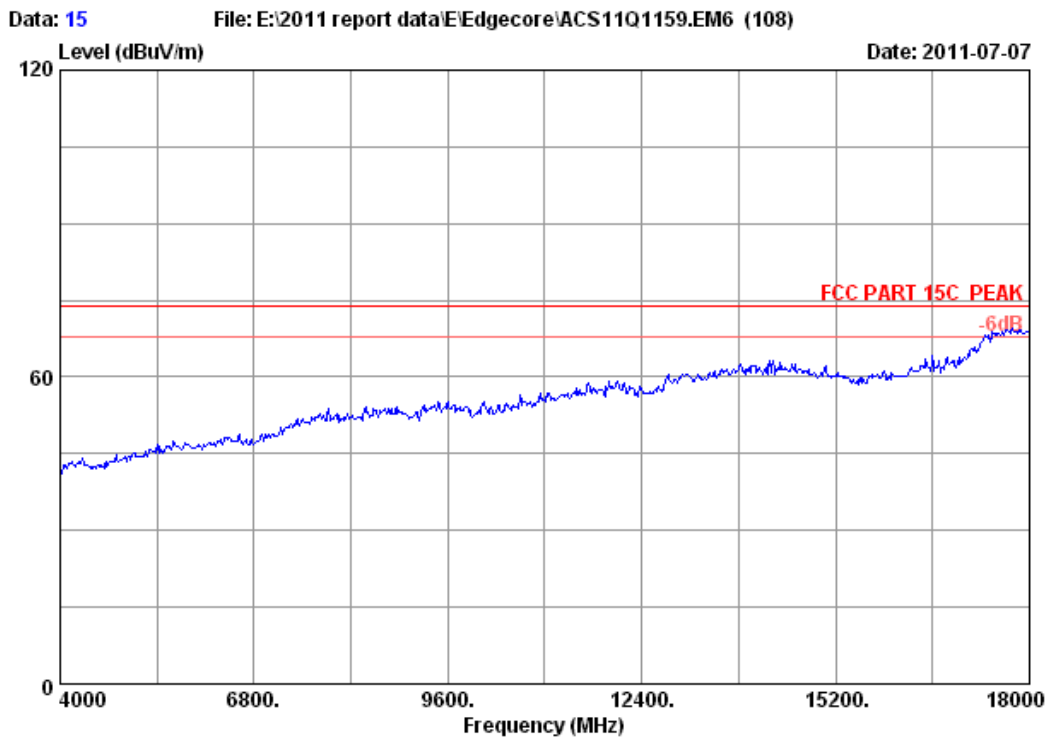

| | | | |
|-------------|---|-----------|--------------|
| Site no. | : 3m Chamber | Data no. | : 15 |
| Dis. / Ant. | : 3m 3115(0911) | Ant. pol. | : HORIZONTAL |
| Limit | : FCC PART 15C PEAK | | |
| Env. / Ins. | : 23°C/54% | Engineer | : Leo-Li |
| EUT | : 300 Mbps 4-port Wireless Broadband Router | | |
| Power | : DC 9V From Adapter Input AC 120V/60Hz | | |
| Test mode | : IEEE802.11b CH11 2462MHz Tx | | |
| M/N | : SMCWBR14-N5 | | |

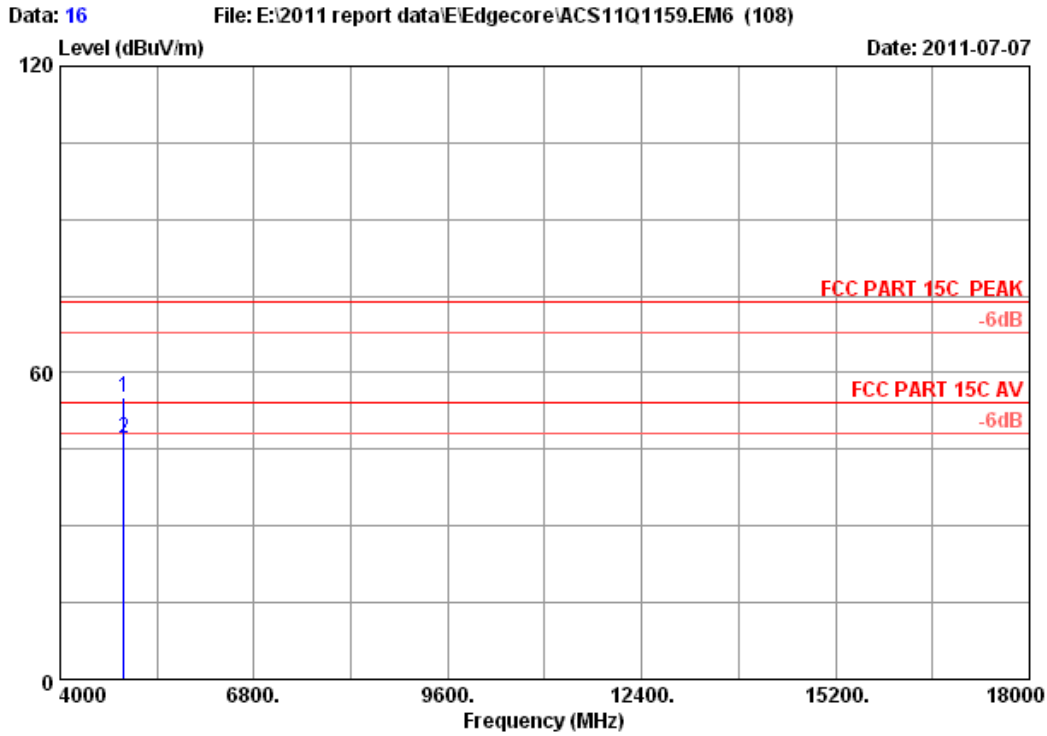


Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4924.000 | 34.49 | 10.76 | 34.98 | 44.97 | 55.24 | 74.00 | 18.76 | Peak |
| 2 | 4924.000 | 34.49 | 10.76 | 34.98 | 36.85 | 47.12 | 54.00 | 6.88 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

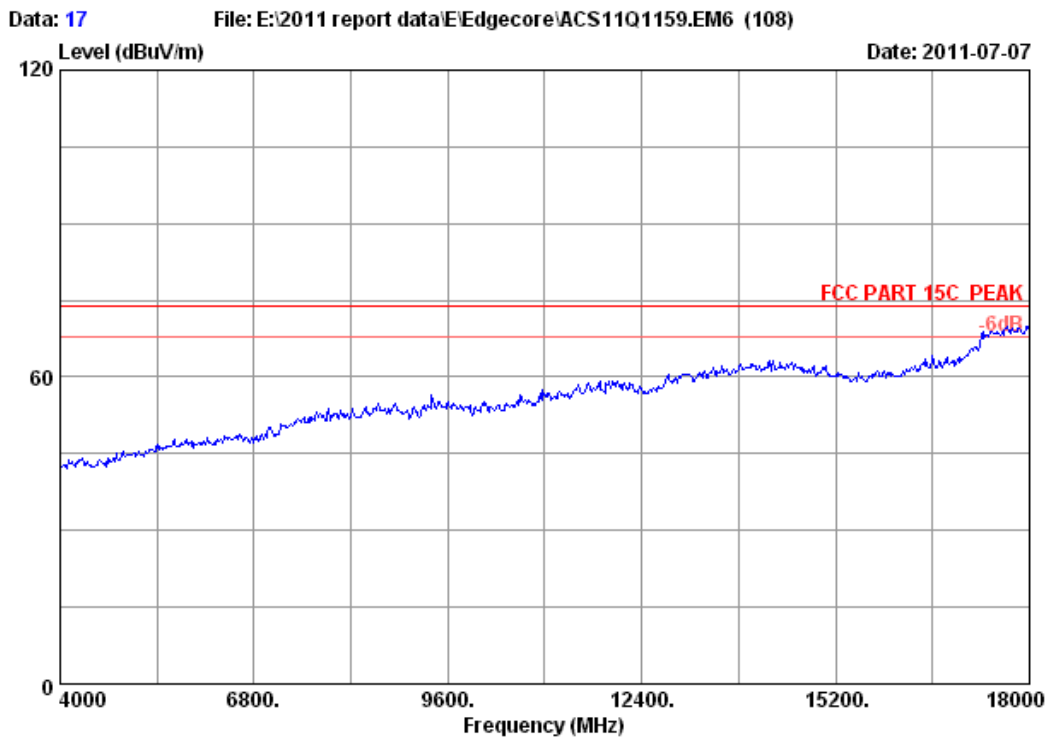

| | | | |
|-------------|---|-------------|----------|
| Site no. | : 3m Chamber | Data no. : | 17 |
| Dis. / Ant. | : 3m 3115(0911) | Ant. pol. : | VERTICAL |
| Limit | : FCC PART 15C PEAK | | |
| Env. / Ins. | : 23°C/54% | Engineer : | Leo-Li |
| EUT | : 300 Mbps 4-port Wireless Broadband Router | | |
| Power | : DC 9V From Adapter Input AC 120V/60Hz | | |
| Test mode | : IEEE802.11b CH11 2462MHz Tx | | |
| M/N | : SMCWBR14-N5 | | |

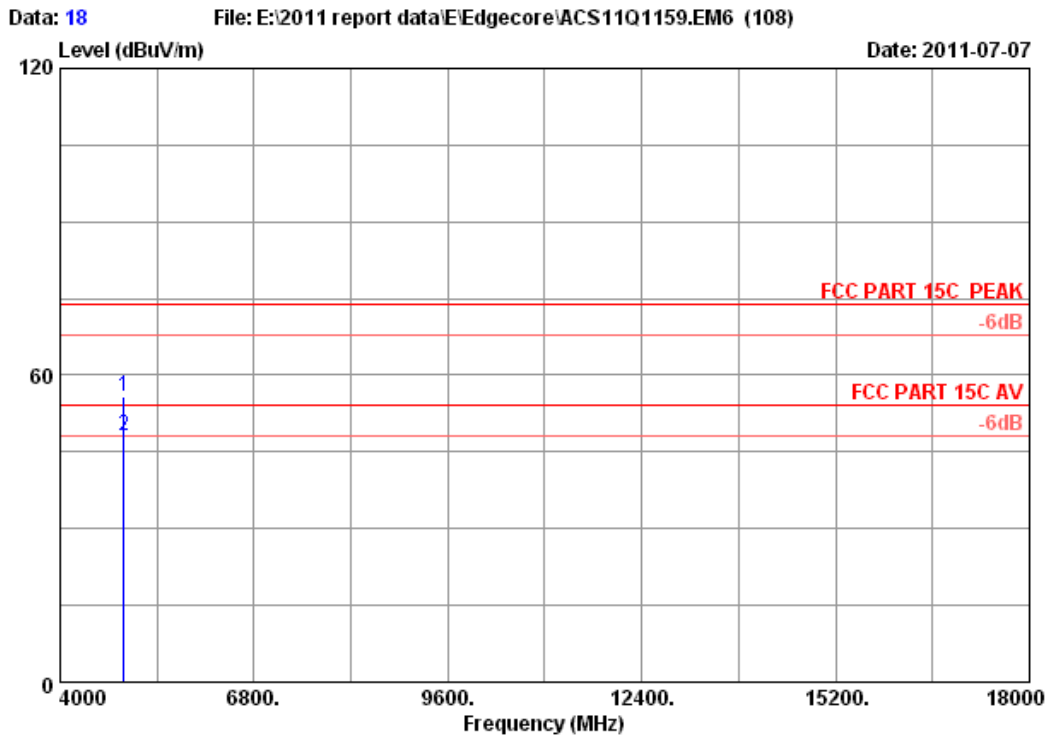


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4924.000 | 34.49 | 10.76 | 34.98 | 45.68 | 55.95 | 74.00 | 18.05 | Peak |
| 2 | 4924.000 | 34.49 | 10.76 | 34.98 | 37.95 | 48.22 | 54.00 | 5.78 | Average |


- Remarks:
1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

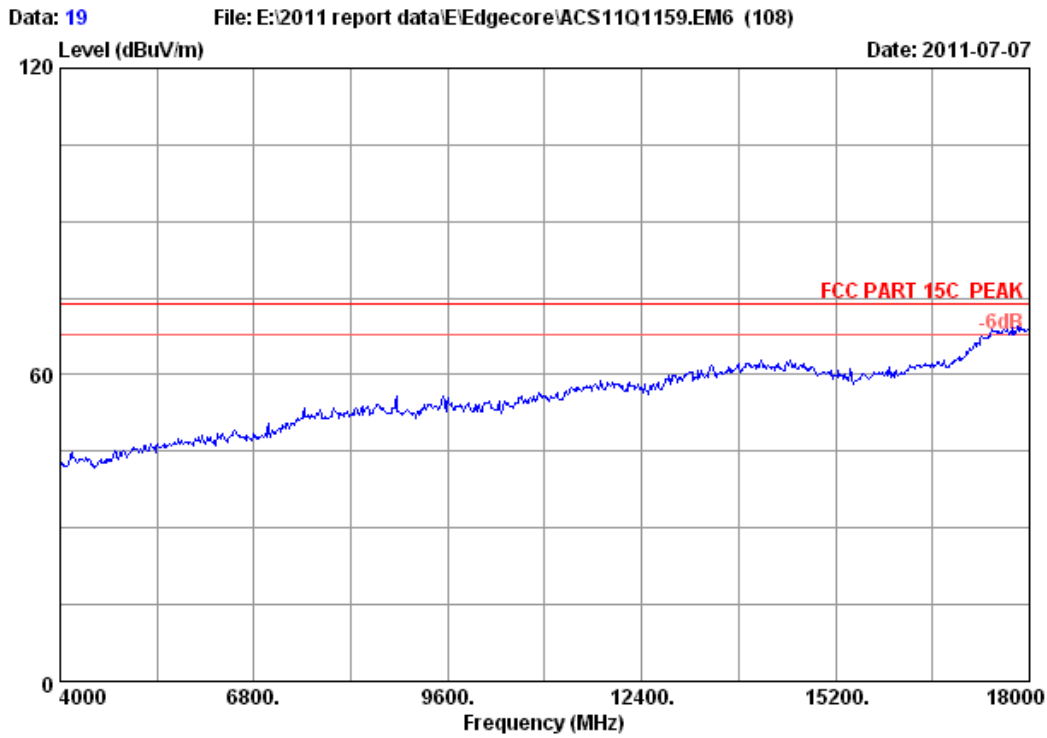

| | | | |
|-------------|---|-------------|----------|
| Site no. | : 3m Chamber | Data no. : | 19 |
| Dis. / Ant. | : 3m 3115(0911) | Ant. pol. : | VERTICAL |
| Limit | : FCC PART 15C PEAK | | |
| Env. / Ins. | : 23°C/54% | Engineer : | Leo-Li |
| EUT | : 300 Mbps 4-port Wireless Broadband Router | | |
| Power | : DC 9V From Adapter Input AC 120V/60Hz | | |
| Test mode | : IEEE802.11g CH1 2412MHz Tx | | |
| M/N | : SMCWBR14-N5 | | |

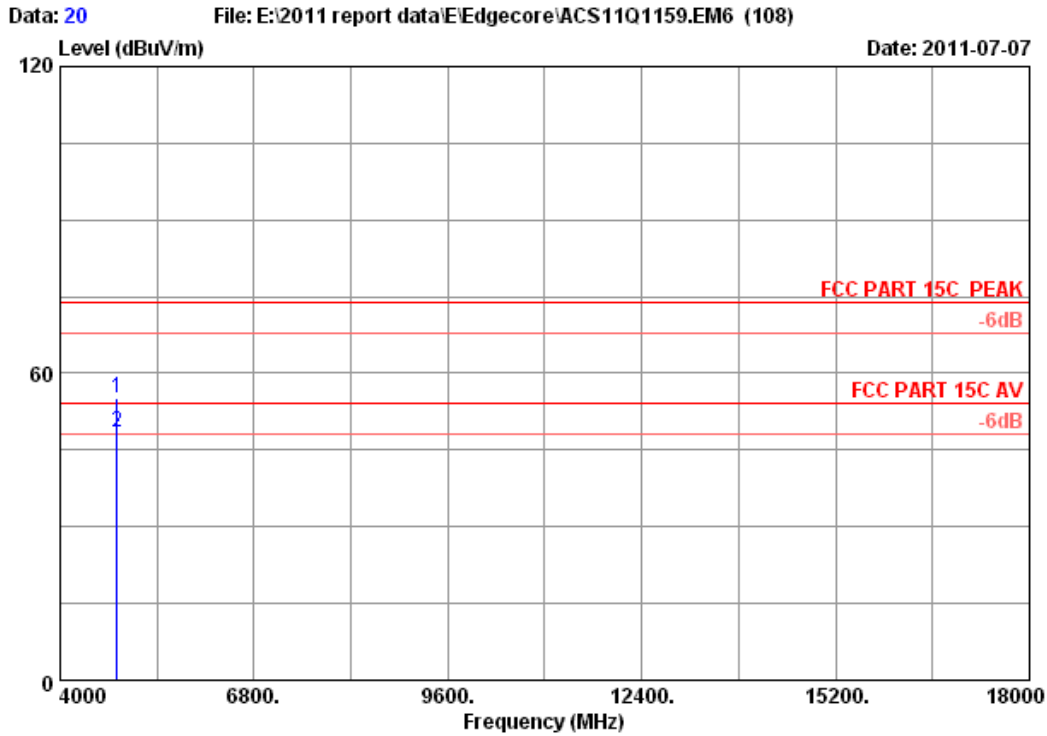


Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : SMCWBR14-N5


| | Ant. | Cable | Amp. | Emission | | | | | |
|------------|--------|-------|--------|----------|----------|----------|--------|---------|--|
| Freq. | Factor | loss | Factor | Reading | Level | Limits | Margin | Remark | |
| (MHz) | (dB/m) | (dB) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | | |
| 1 4824.000 | 34.32 | 10.64 | 35.08 | 45.16 | 55.04 | 74.00 | 18.96 | Peak | |
| 2 4824.000 | 34.32 | 10.64 | 35.08 | 38.42 | 48.30 | 54.00 | 5.70 | Average | |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

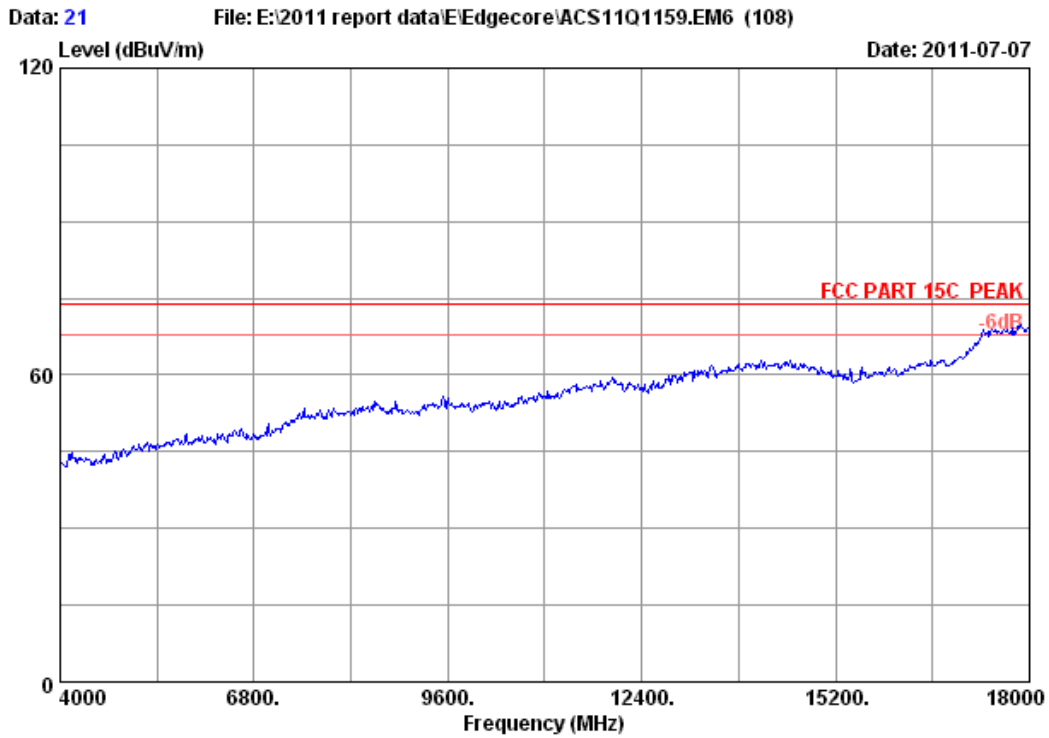

Site no. : 3m Chamber Data no. : 21
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : SMCWBR14-N5

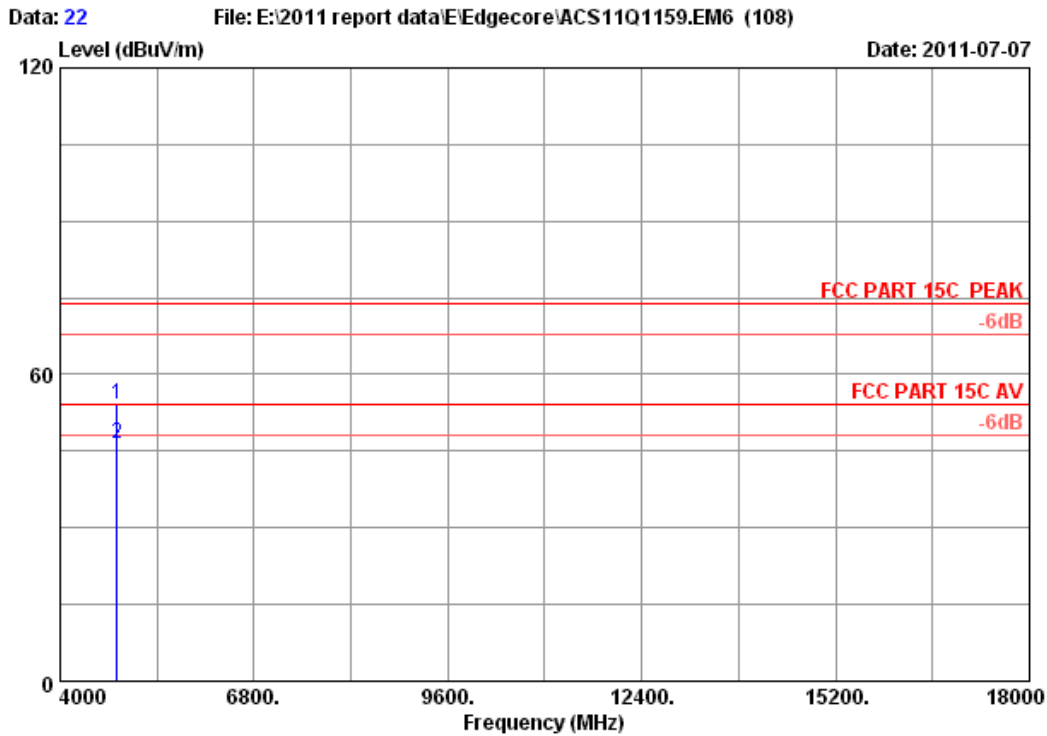


Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4824.000 | 34.32 | 10.64 | 35.08 | 44.16 | 54.04 | 74.00 | 19.96 | Peak |
| 2 | 4824.000 | 34.32 | 10.64 | 35.08 | 36.49 | 46.37 | 54.00 | 7.63 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

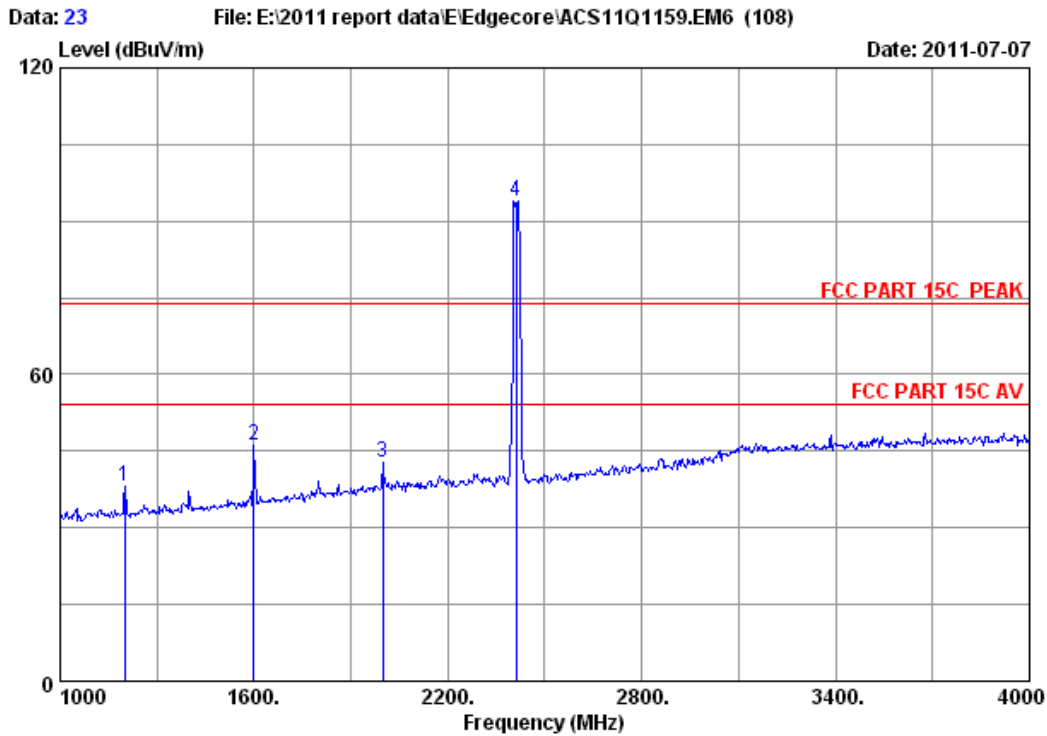


Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.55 | 37.98 | 74.00 | 36.02 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 50.18 | 46.11 | 74.00 | 27.89 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.69 | 42.82 | 74.00 | 31.18 | Peak |
| 4 | 2412.000 | 29.45 | 7.43 | 36.62 | 93.76 | 94.02 | 74.00 | -20.02 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

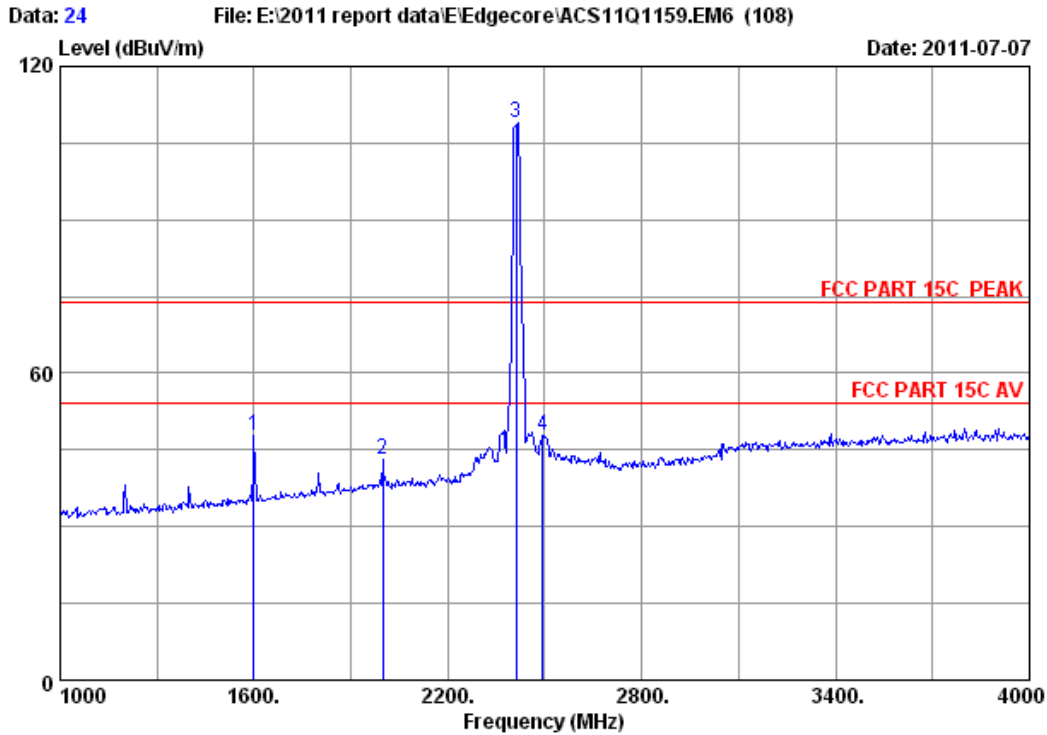


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1600.000 | 26.96 | 5.91 | 36.94 | 51.89 | 47.82 | 74.00 | 26.18 | Peak |
| 2 | 1999.000 | 29.20 | 6.63 | 36.70 | 44.14 | 43.27 | 74.00 | 30.73 | Peak |
| 3 | 2412.000 | 29.45 | 7.43 | 36.62 | 108.57 | 108.83 | 74.00 | -34.83 | Peak |
| 4 | 2494.000 | 29.50 | 7.58 | 36.60 | 47.39 | 47.87 | 74.00 | 26.13 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

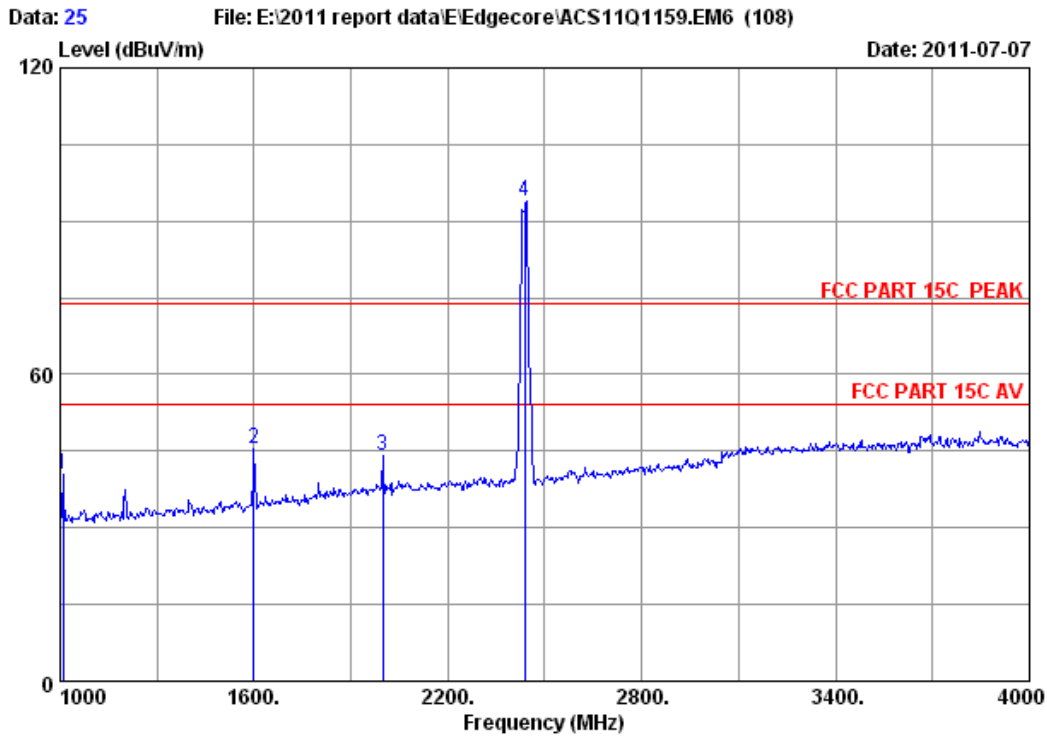


Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH6 2437MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1009.000 | 25.43 | 4.78 | 37.90 | 48.23 | 40.54 | 74.00 | 33.46 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 49.42 | 45.35 | 74.00 | 28.65 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 44.93 | 44.06 | 74.00 | 29.94 | Peak |
| 4 | 2437.000 | 29.47 | 7.46 | 36.61 | 93.44 | 93.76 | 74.00 | -19.76 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

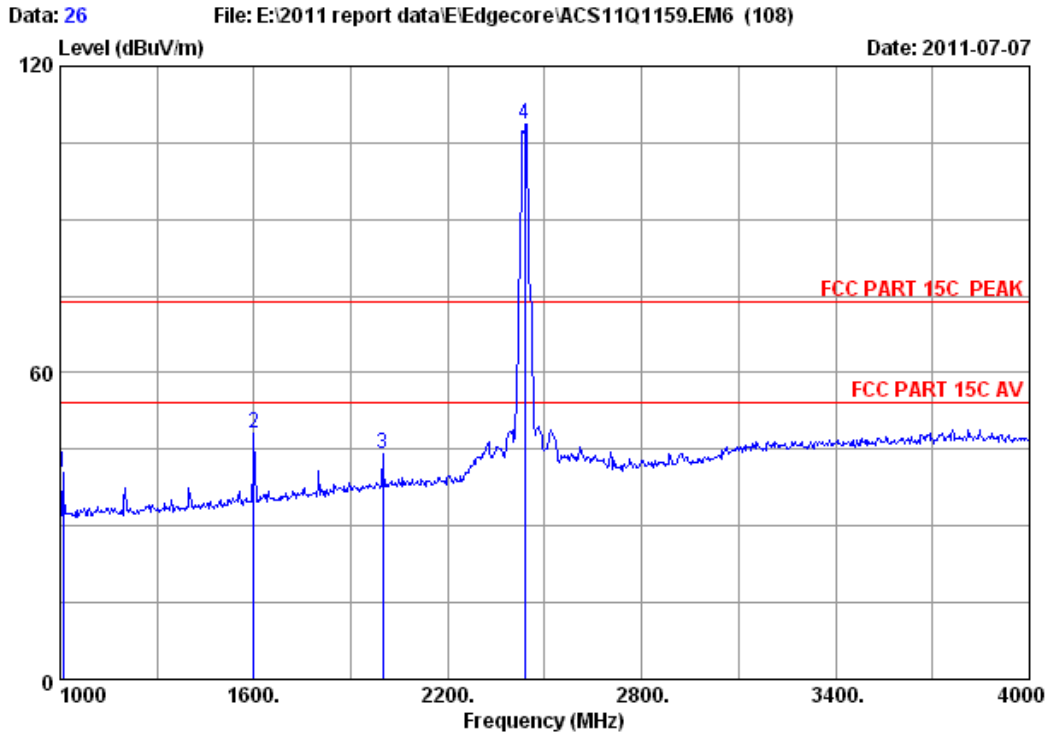

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH6 2437MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1009.000 | 25.43 | 4.78 | 37.90 | 48.23 | 40.54 | 74.00 | 33.46 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 52.06 | 47.99 | 74.00 | 26.01 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 44.93 | 44.06 | 74.00 | 29.94 | Peak |
| 4 | 2437.000 | 29.47 | 7.46 | 36.61 | 108.26 | 108.58 | 74.00 | -34.58 | Peak |

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

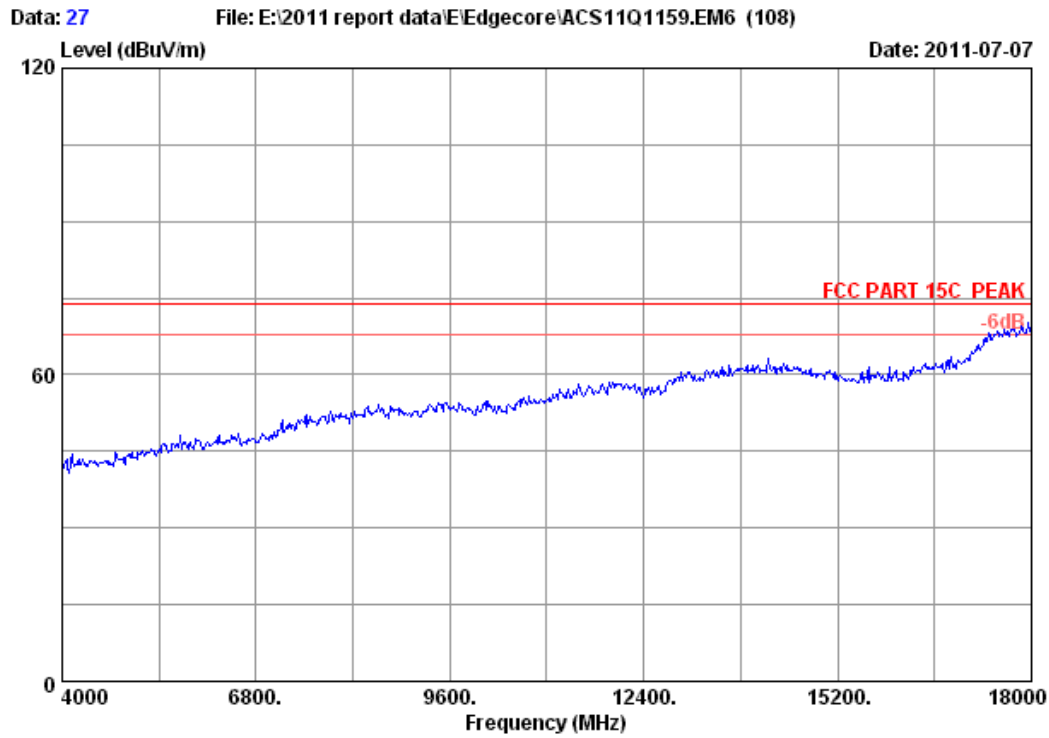

Site no. : 3m Chamber Data no. : 27
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH6 2437MHz Tx
M/N : SMCWBR14-N5

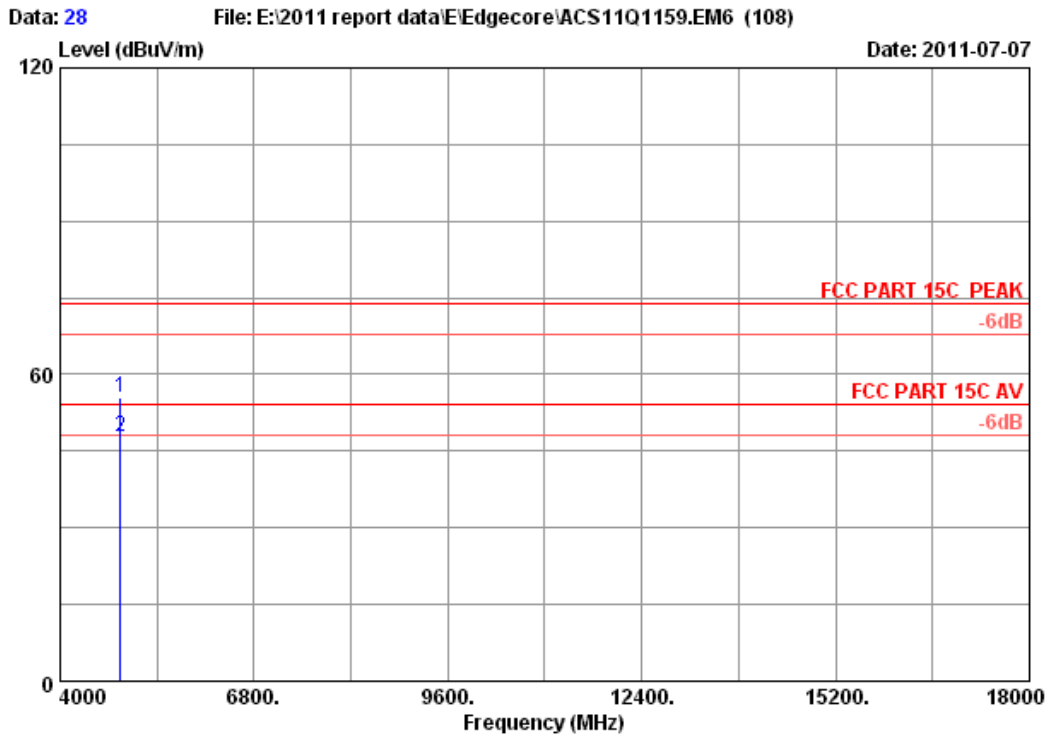


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH6 2437MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4874.000 | 34.41 | 10.69 | 35.03 | 45.32 | 55.39 | 74.00 | 18.61 | Peak |
| 2 | 4874.000 | 34.41 | 10.69 | 35.03 | 37.85 | 47.92 | 54.00 | 6.08 | Average |


Remarks:
 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

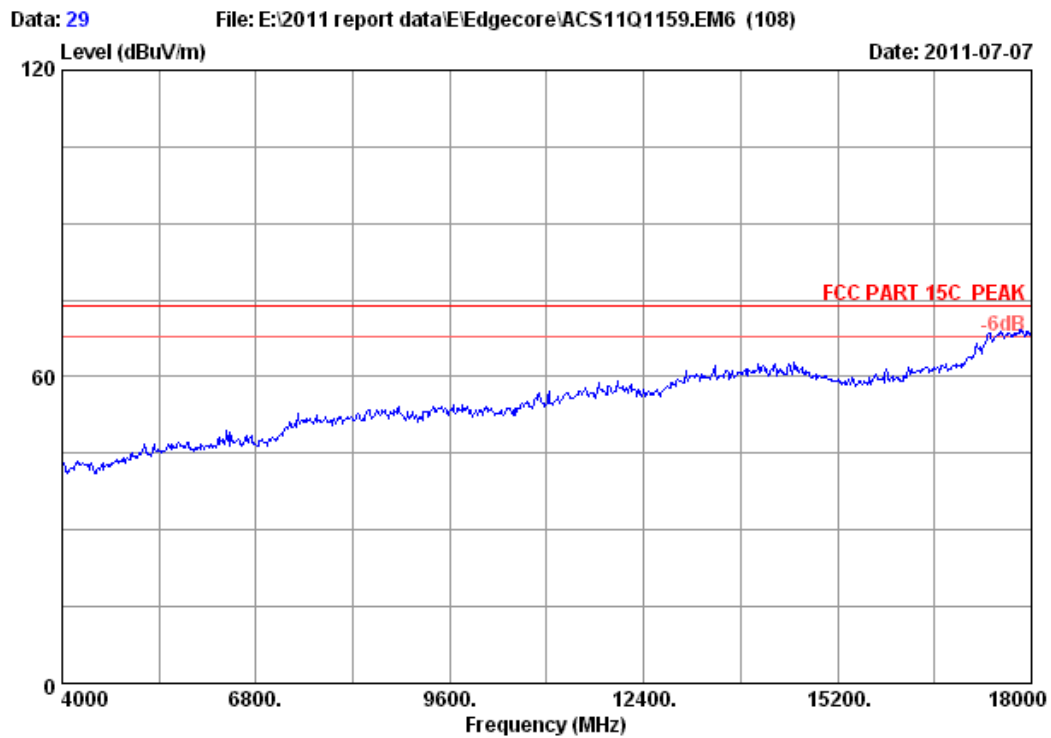

Site no. : 3m Chamber Data no. : 29
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH6 2437MHz Tx
M/N : SMCWBR14-N5

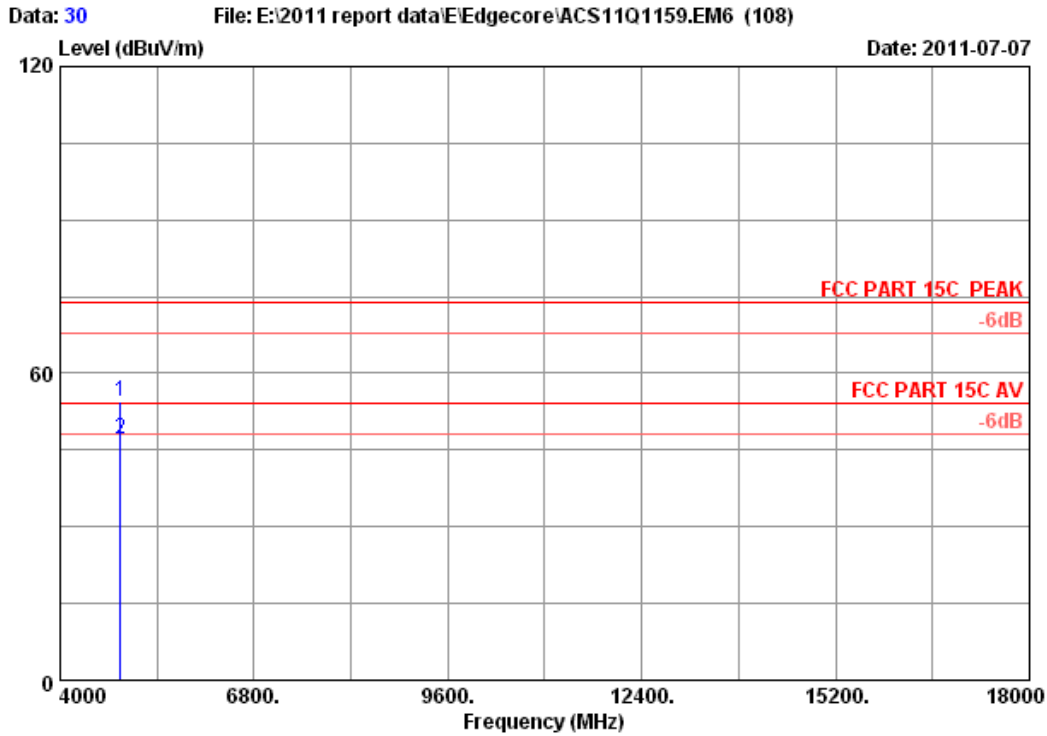


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH6 2437MHz Tx
 M/N : SMCWBR14-N5


| | Ant. | Cable | Amp. | Emission | | | | | |
|------------|--------|-------|--------|----------|----------|----------|--------|---------|--|
| Freq. | Factor | loss | Factor | Reading | Level | Limits | Margin | Remark | |
| (MHz) | (dB/m) | (dB) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | | |
| 1 4874.000 | 34.41 | 10.69 | 35.03 | 44.50 | 54.57 | 74.00 | 19.43 | Peak | |
| 2 4874.000 | 34.41 | 10.69 | 35.03 | 36.98 | 47.05 | 54.00 | 6.95 | Average | |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

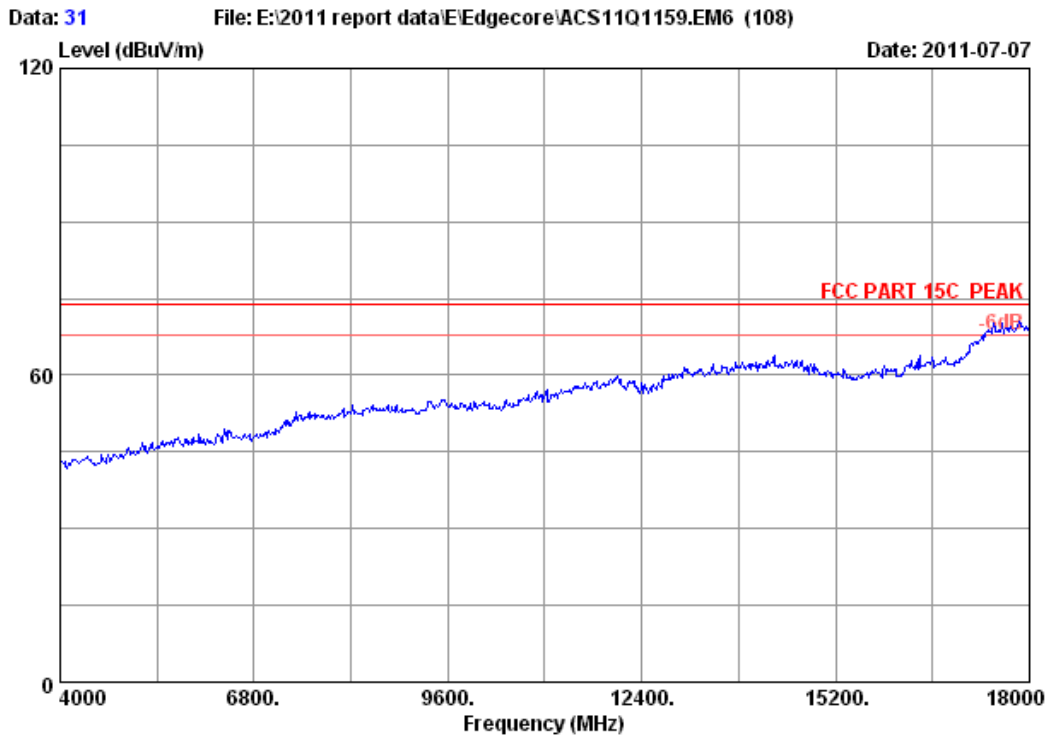

| | | | |
|-------------|---|-------------|------------|
| Site no. | : 3m Chamber | Data no. : | 31 |
| Dis. / Ant. | : 3m 3115(0911) | Ant. pol. : | HORIZONTAL |
| Limit | : FCC PART 15C PEAK | | |
| Env. / Ins. | : 23°C/54% | Engineer : | Leo-Li |
| EUT | : 300 Mbps 4-port Wireless Broadband Router | | |
| Power | : DC 9V From Adapter Input AC 120V/60Hz | | |
| Test mode | : IEEE802.11g CH11 2462MHz Tx | | |
| M/N | : SMCWBR14-N5 | | |

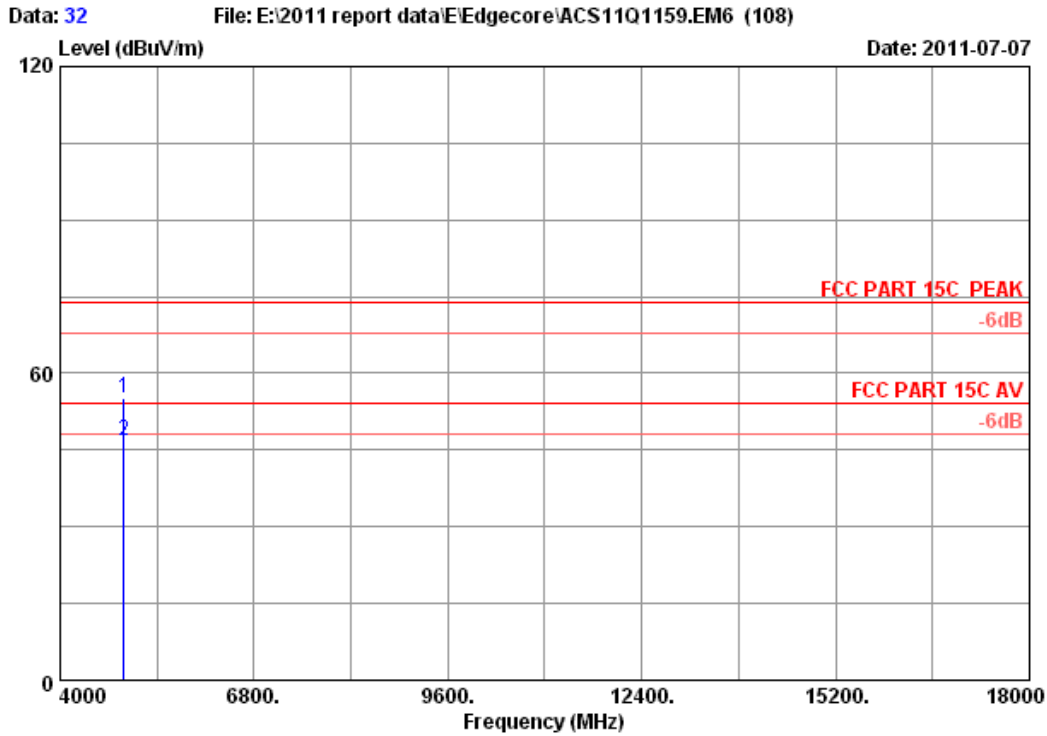

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : SMCWBR14-N5


| | Ant. | Cable | Amp. | Emission | | | | | |
|------------|--------|-------|--------|----------|----------|----------|--------|---------|--|
| Freq. | Factor | loss | Factor | Reading | Level | Limits | Margin | Remark | |
| (MHz) | (dB/m) | (dB) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | | |
| 1 4924.000 | 34.49 | 10.76 | 34.98 | 44.95 | 55.22 | 74.00 | 18.78 | Peak | |
| 2 4924.000 | 34.49 | 10.76 | 34.98 | 36.47 | 46.74 | 54.00 | 7.26 | Average | |

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

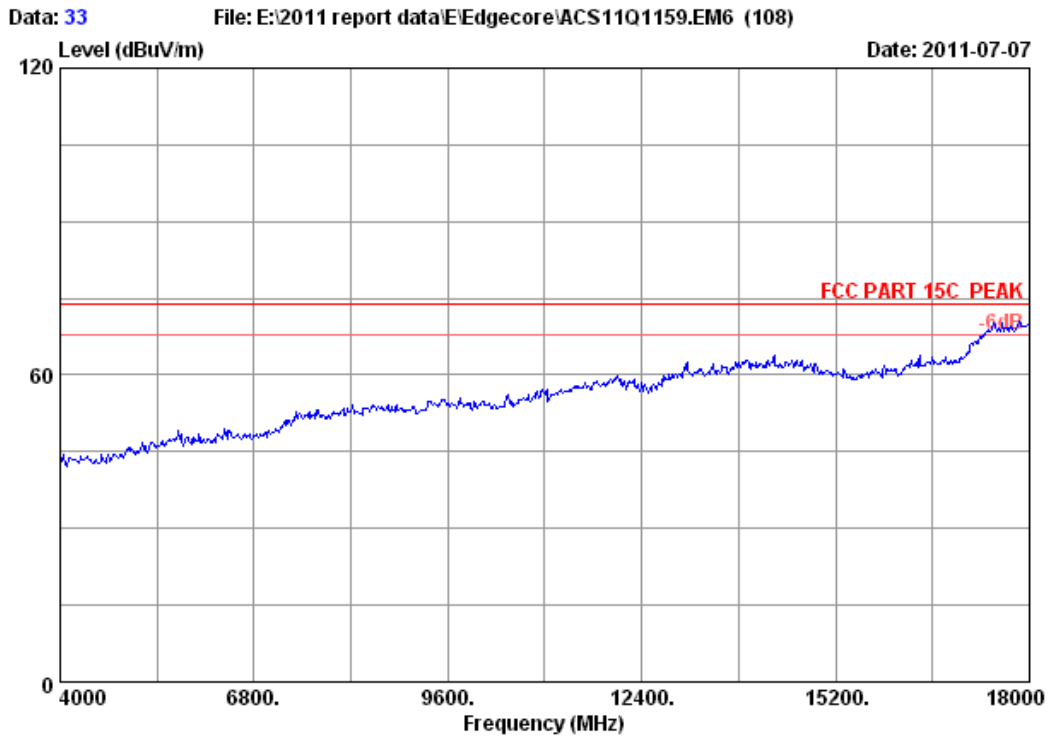

| | | | |
|-------------|---|-------------|----------|
| Site no. | : 3m Chamber | Data no. : | 33 |
| Dis. / Ant. | : 3m 3115(0911) | Ant. pol. : | VERTICAL |
| Limit | : FCC PART 15C PEAK | | |
| Env. / Ins. | : 23°C/54% | Engineer : | Leo-Li |
| EUT | : 300 Mbps 4-port Wireless Broadband Router | | |
| Power | : DC 9V From Adapter Input AC 120V/60Hz | | |
| Test mode | : IEEE802.11g CH11 2462MHz Tx | | |
| M/N | : SMCWBR14-N5 | | |

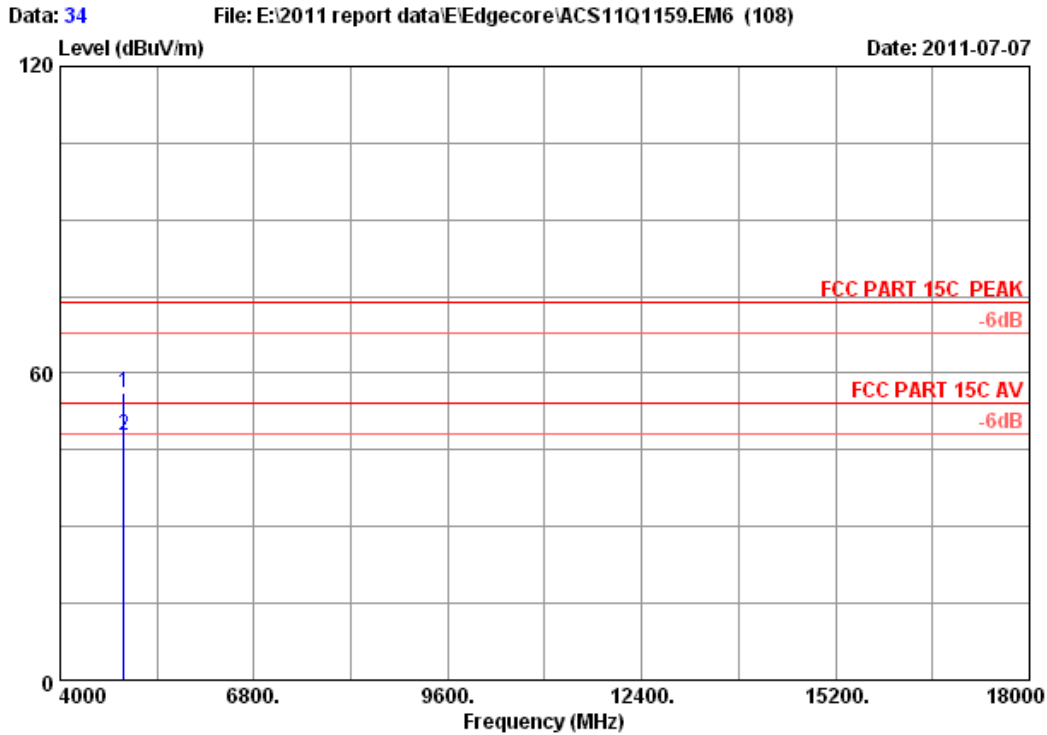


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4924.000 | 34.49 | 10.76 | 34.98 | 45.97 | 56.24 | 74.00 | 17.76 | Peak |
| 2 | 4924.000 | 34.49 | 10.76 | 34.98 | 37.42 | 47.69 | 54.00 | 6.31 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

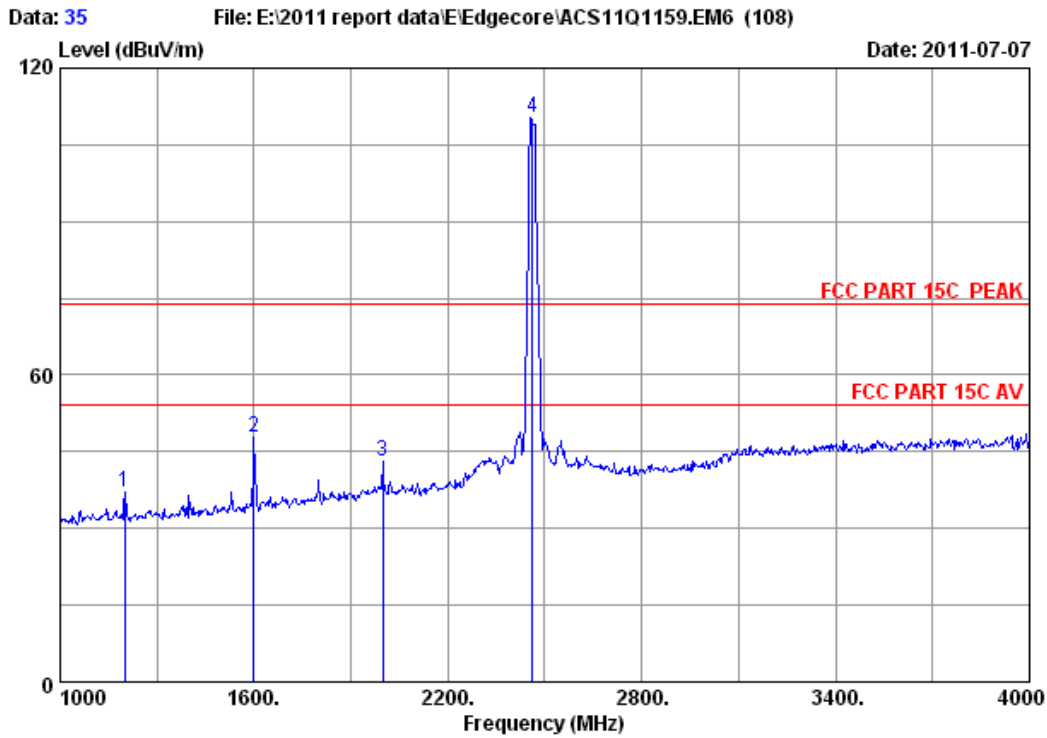


Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 43.56 | 36.99 | 74.00 | 37.01 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 52.03 | 47.96 | 74.00 | 26.04 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.85 | 42.98 | 74.00 | 31.02 | Peak |
| 4 | 2462.000 | 29.48 | 7.54 | 36.61 | 109.79 | 110.20 | 74.00 | -36.20 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

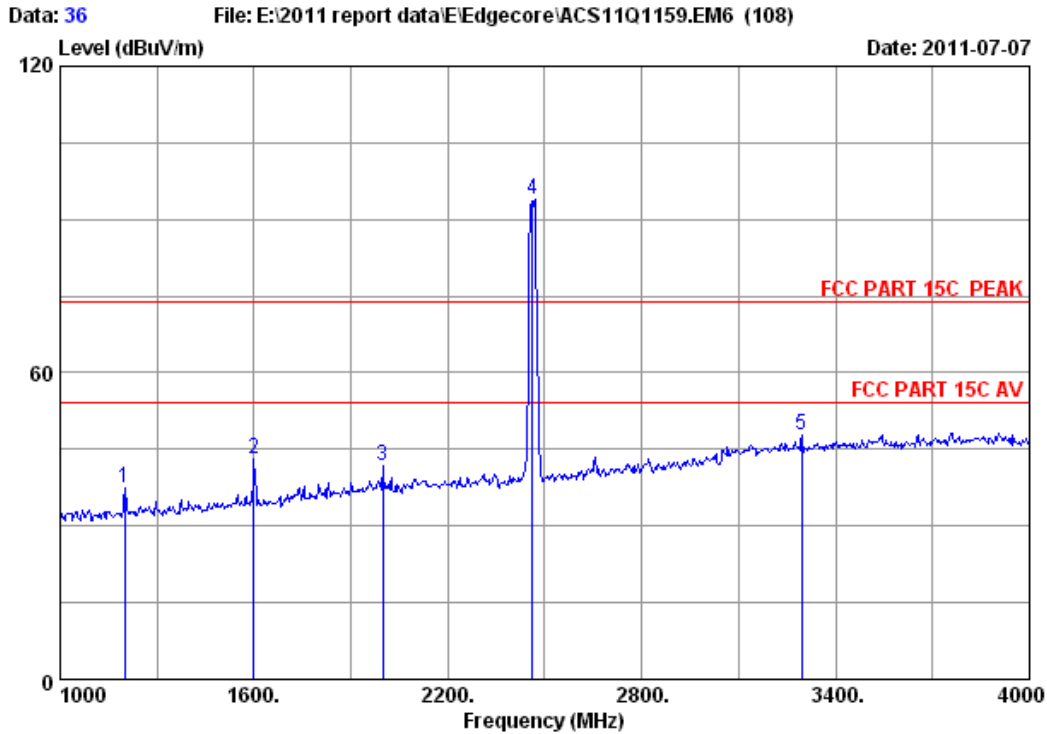


Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. | Cable | Amp. | Emission | | | | | |
|-------|----------|-------|--------|----------|----------|----------|--------|--------|------|
| Freq. | Factor | loss | Factor | Reading | Level | Limits | Margin | Remark | |
| (MHz) | (dB/m) | (dB) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | | |
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 43.85 | 37.28 | 74.00 | 36.72 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 47.33 | 43.26 | 74.00 | 30.74 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 42.75 | 41.88 | 74.00 | 32.12 | Peak |
| 4 | 2462.000 | 29.48 | 7.54 | 36.61 | 93.46 | 93.87 | 74.00 | -19.87 | Peak |
| 5 | 3295.000 | 32.76 | 8.88 | 36.20 | 42.45 | 47.89 | 74.00 | 26.11 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

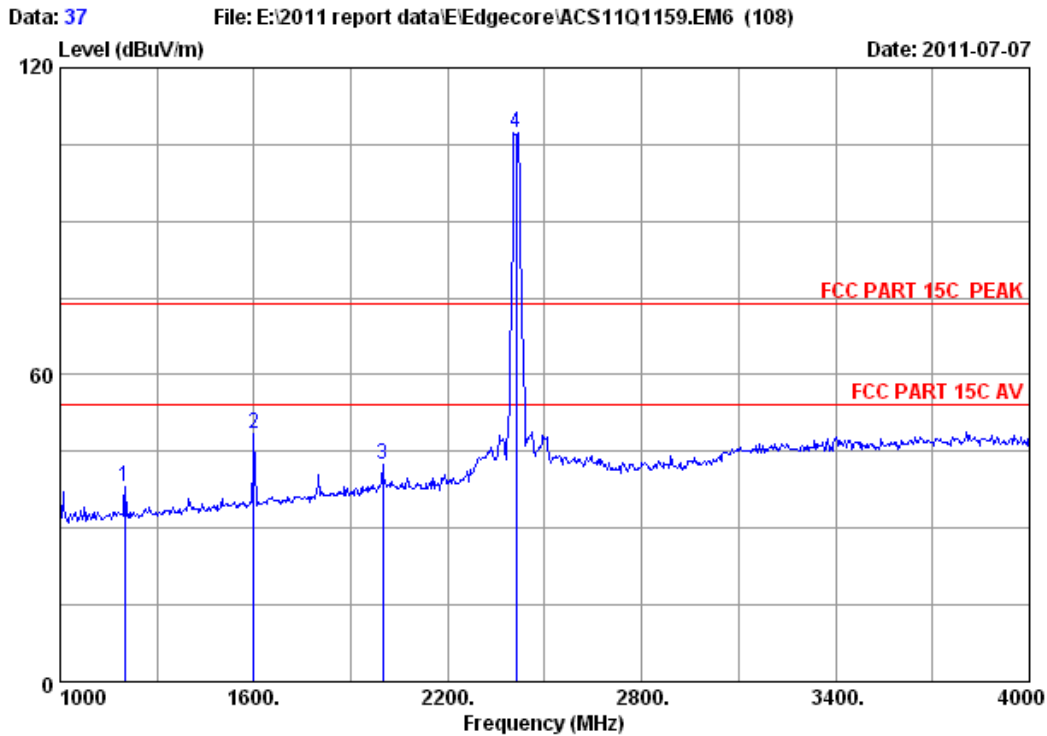


Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.59 | 38.02 | 74.00 | 35.98 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 52.53 | 48.46 | 74.00 | 25.54 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.19 | 42.32 | 74.00 | 31.68 | Peak |
| 4 | 2412.000 | 29.45 | 7.43 | 36.62 | 107.05 | 107.31 | 74.00 | -33.31 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

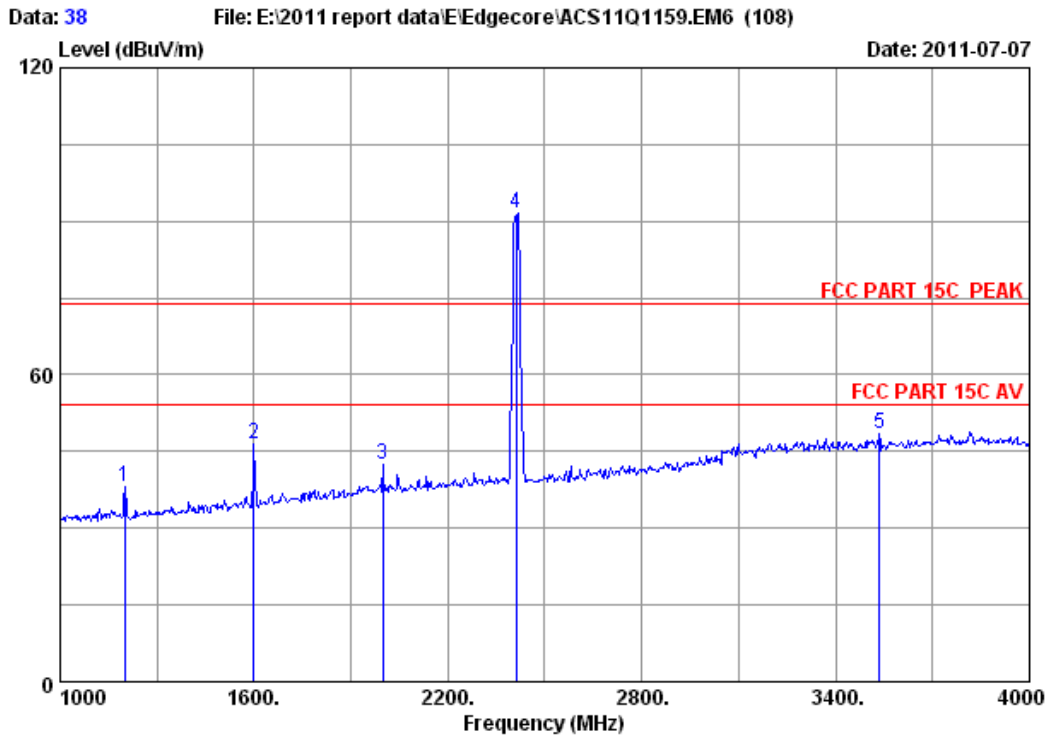


Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.69 | 38.12 | 74.00 | 35.88 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 50.68 | 46.61 | 74.00 | 27.39 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.24 | 42.37 | 74.00 | 31.63 | Peak |
| 4 | 2412.000 | 29.45 | 7.43 | 36.62 | 91.37 | 91.63 | 74.00 | -17.63 | Peak |
| 5 | 3535.000 | 33.35 | 9.16 | 35.98 | 41.88 | 48.41 | 74.00 | 25.59 | Peak |


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

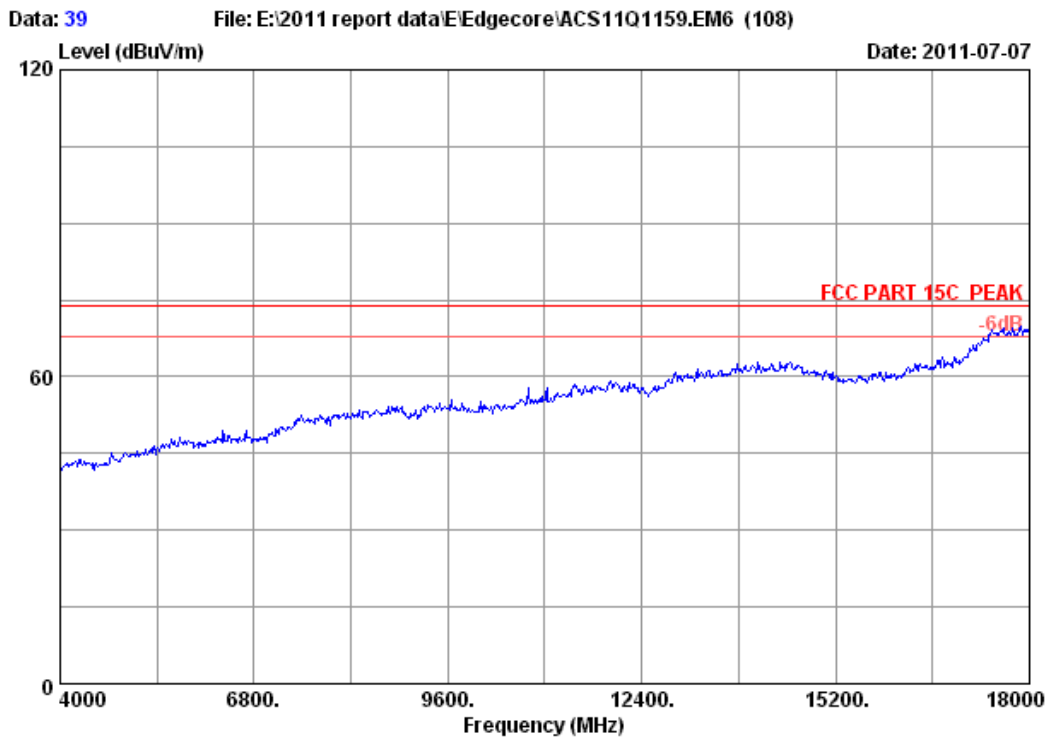

```

Site no.      : 3m Chamber           Data no. : 39
Dis. / Ant.   : 3m 3115(0911)       Ant. pol. : VERTICAL
Limit         : FCC PART 15C PEAK
Env. / Ins.   : 23*C/54%           Engineer  : Leo-Li
EUT           : 300 Mbps 4-port Wireless Broadband Router
Power         : DC 9V From Adapter Input AC 120V/60Hz
Test mode     : IEEE802.11n HT20 CH1 2412MHz Tx
M/N           : SMCWBR14-N5
    
```

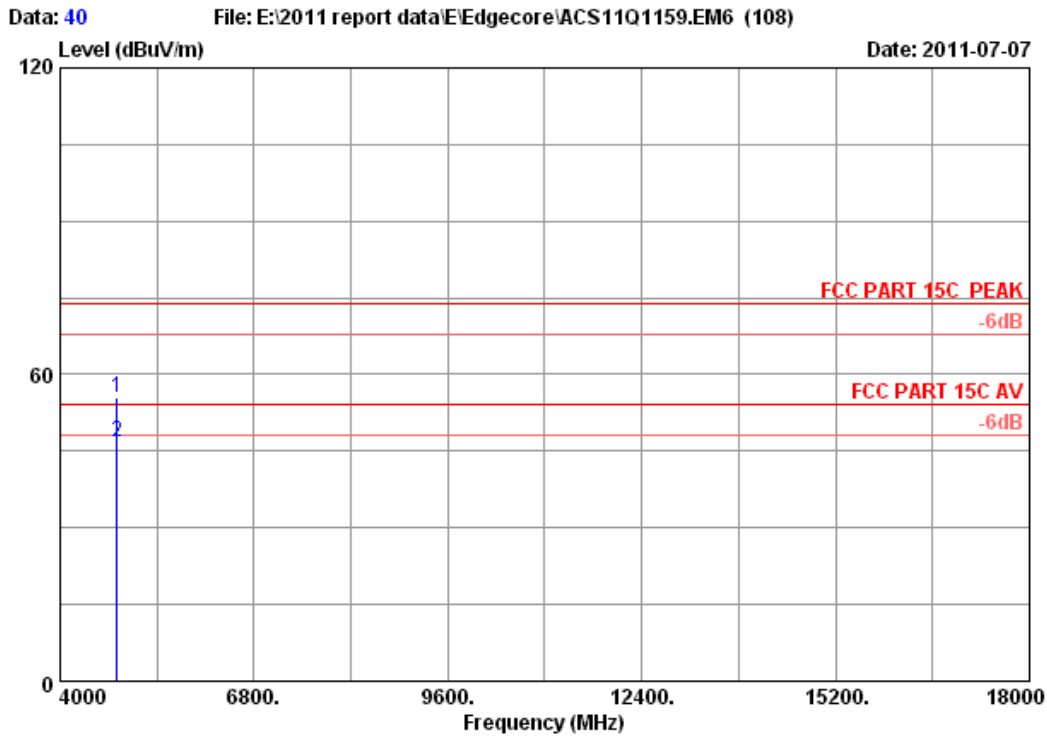


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4824.000 | 34.32 | 10.64 | 35.08 | 45.76 | 55.64 | 74.00 | 18.36 | Peak |
| 2 | 4824.000 | 34.32 | 10.64 | 35.08 | 36.85 | 46.73 | 54.00 | 7.27 | Average |


Remarks:
 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

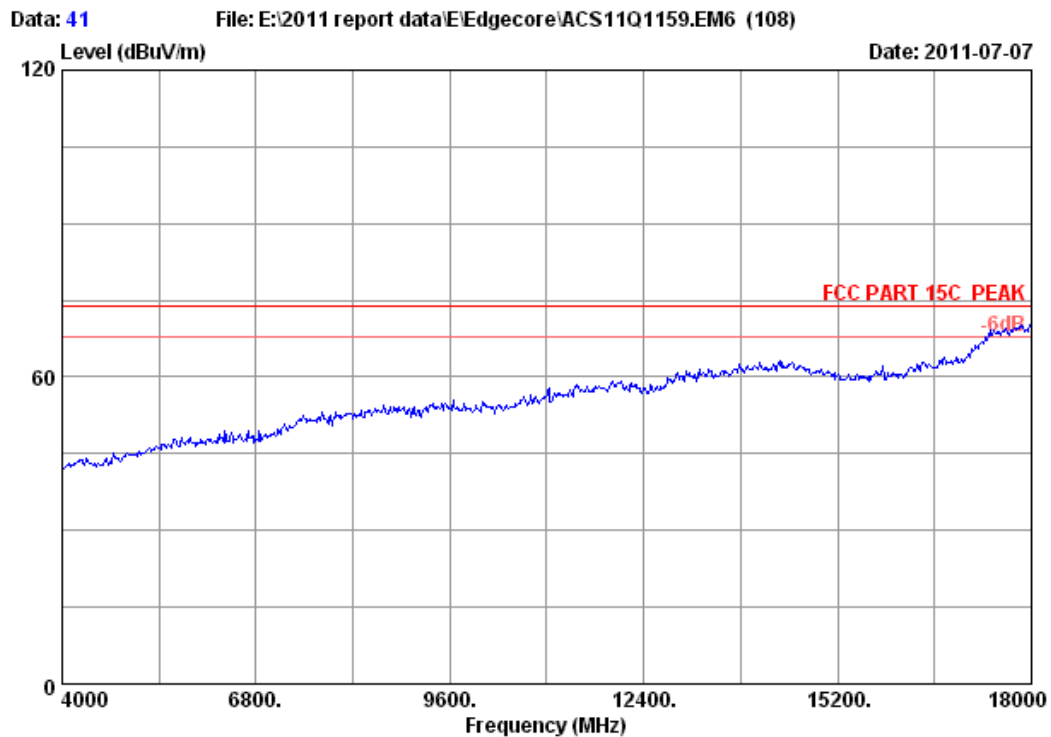

Site no. : 3m Chamber Data no. : 41
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : SMCWBR14-N5

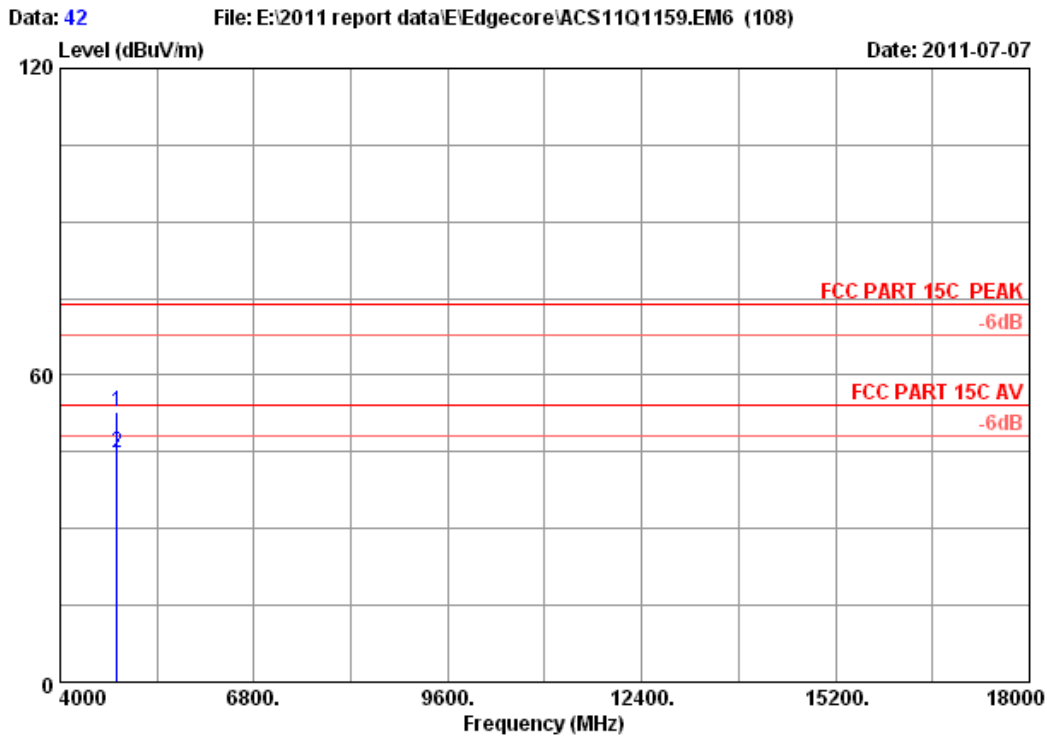


Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : SMCWBR14-N5


| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 4824.000 | 34.32 | 10.64 | 35.08 | 42.91 | 52.79 | 74.00 | 21.21 | Peak |
| 2 | 4824.000 | 34.32 | 10.64 | 35.08 | 34.99 | 44.87 | 54.00 | 9.13 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

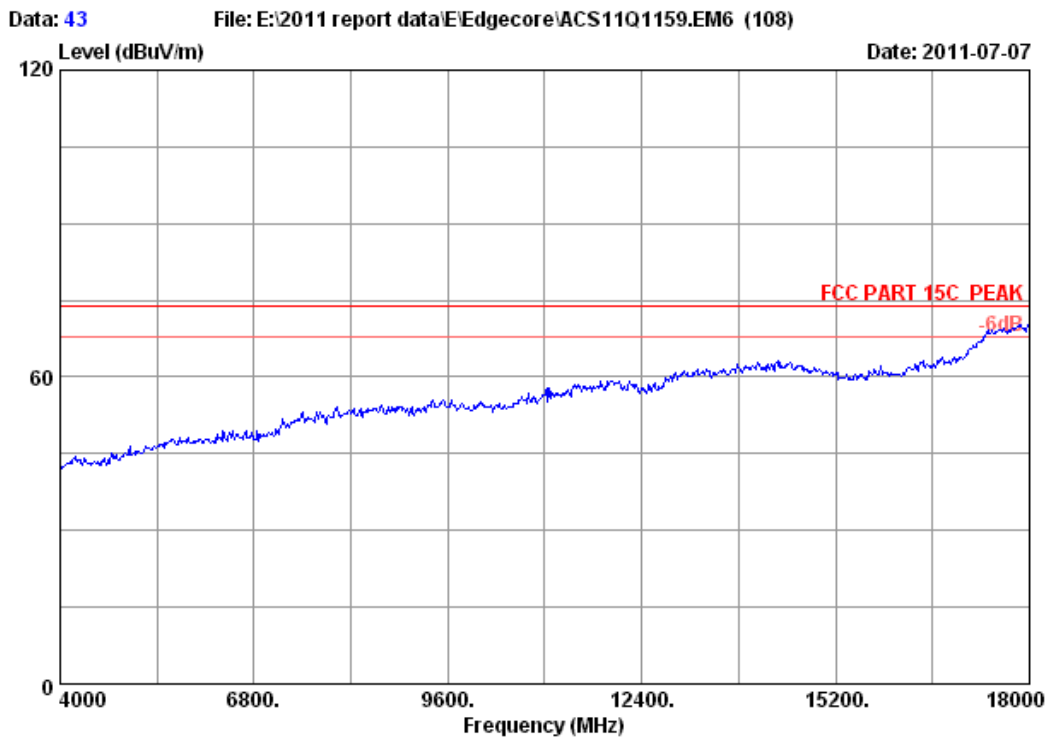

Site no. : 3m Chamber Data no. : 43
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
M/N : SMCWBR14-N5

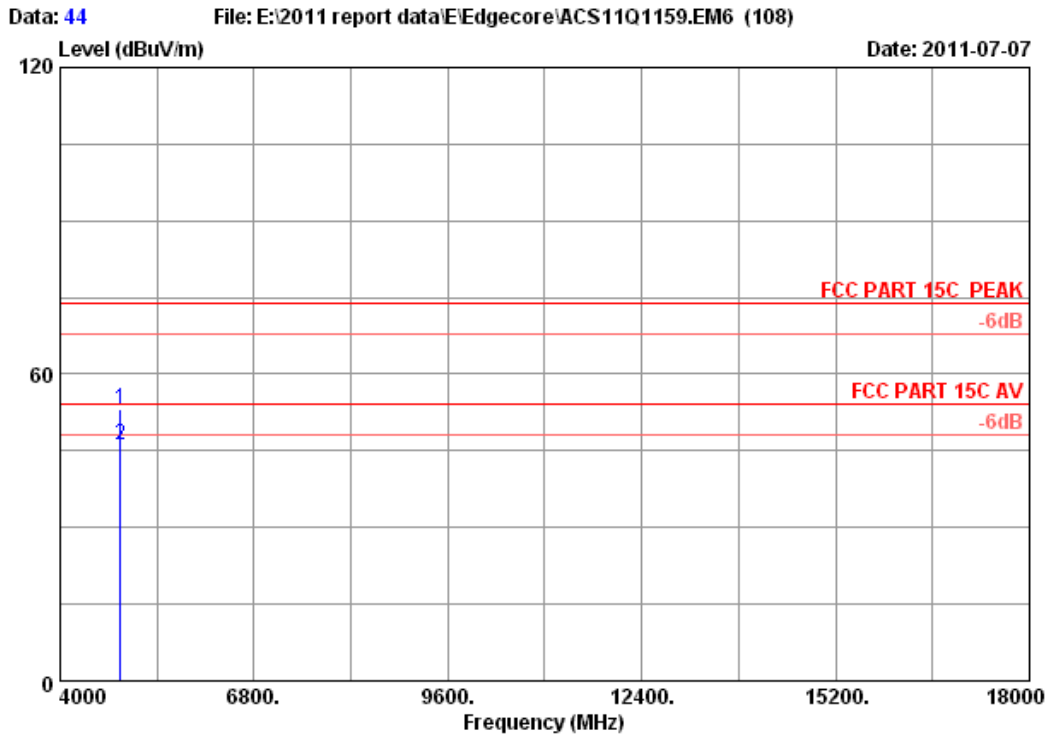


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
 M/N : SMCWBR14-N5


| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 4874.000 | 34.41 | 10.69 | 35.03 | 43.04 | 53.11 | 74.00 | 20.89 | Peak |
| 2 | 4874.000 | 34.41 | 10.69 | 35.03 | 36.10 | 46.17 | 54.00 | 7.83 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

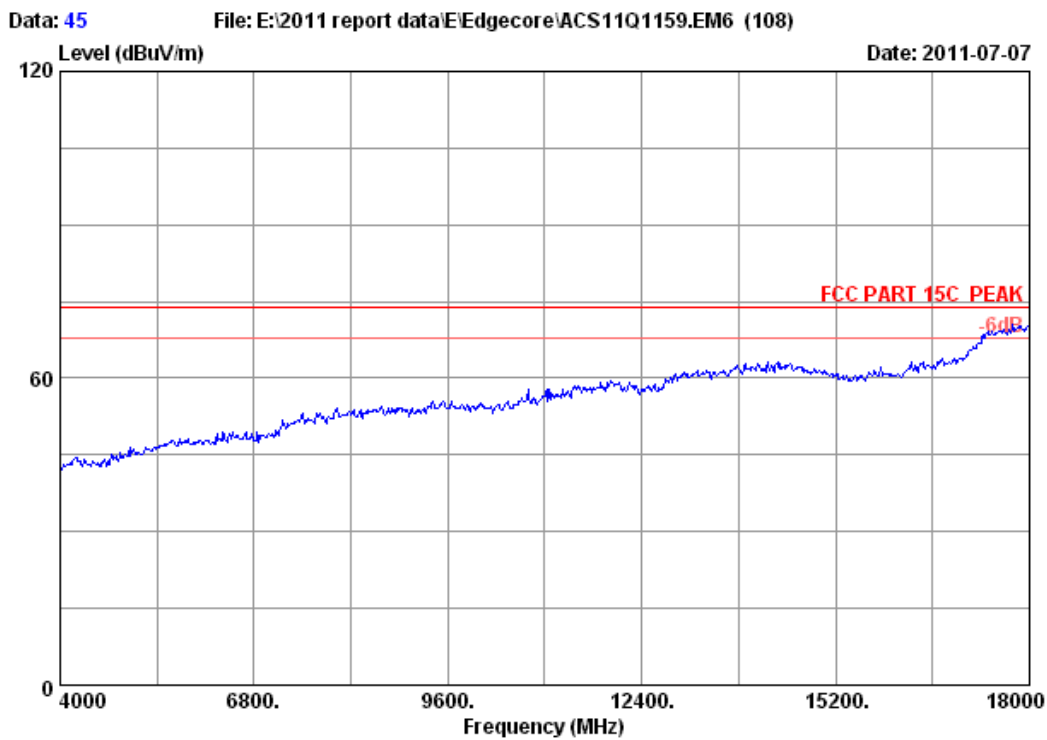

Site no. : 3m Chamber Data no. : 45
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
M/N : SMCWBR14-N5

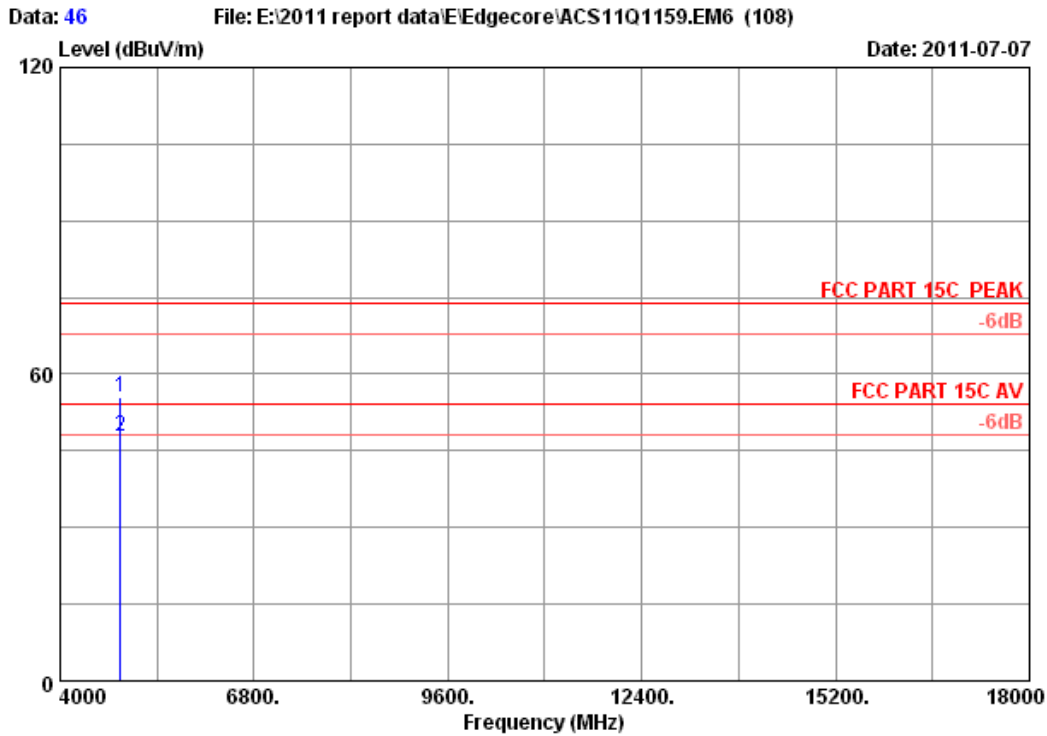


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
 M/N : SMCWBR14-N5

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 4874.000 | 34.41 | 10.69 | 35.03 | 45.41 | 55.48 | 74.00 | 18.52 | Peak |
| 2 | 4874.000 | 34.41 | 10.69 | 35.03 | 37.86 | 47.93 | 54.00 | 6.07 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

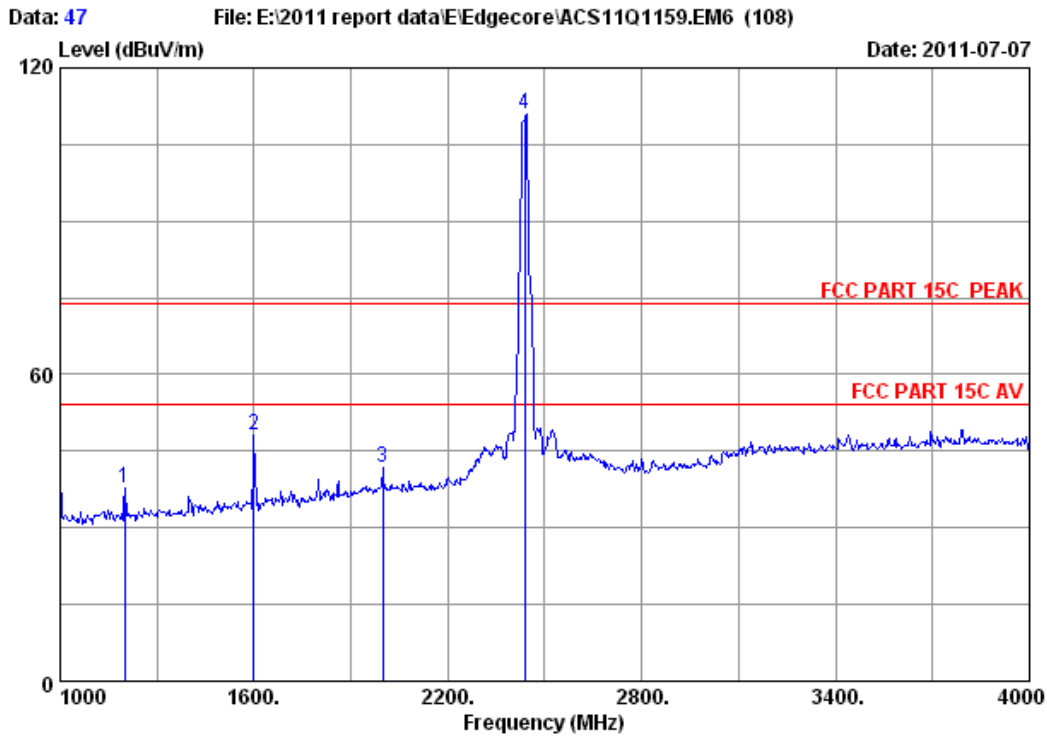


Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.46 | 37.89 | 74.00 | 36.11 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 52.13 | 48.06 | 74.00 | 25.94 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 42.80 | 41.93 | 74.00 | 32.07 | Peak |
| 4 | 2437.000 | 29.47 | 7.46 | 36.61 | 110.55 | 110.87 | 74.00 | -36.87 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

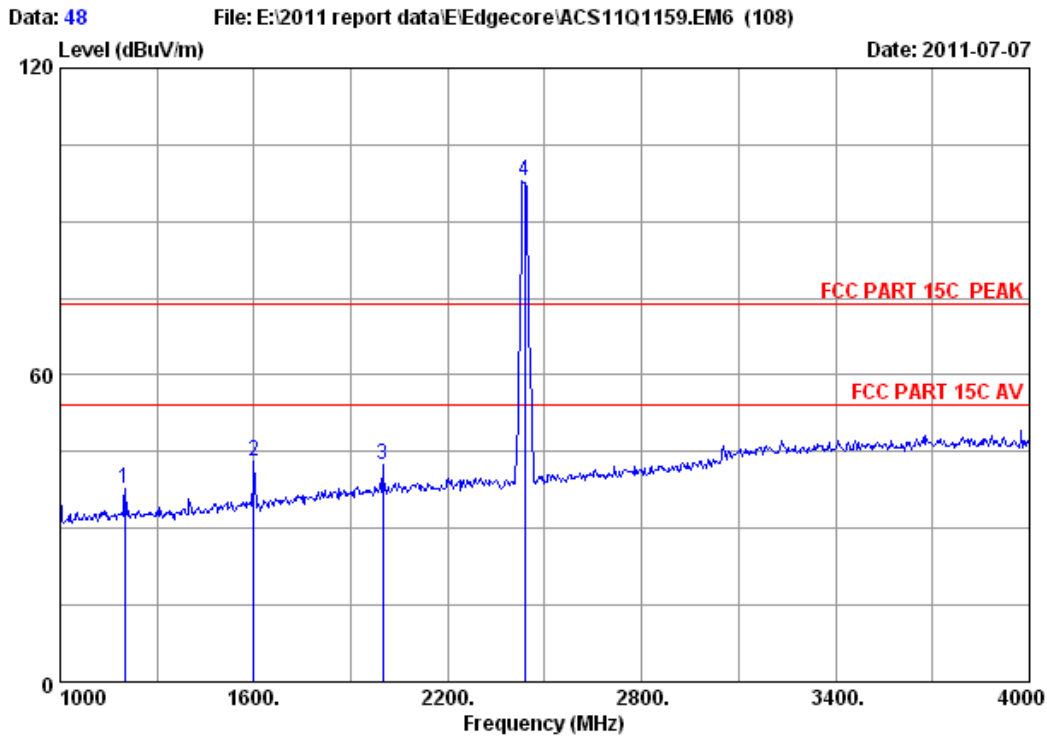


Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.50 | 37.93 | 74.00 | 36.07 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 47.25 | 43.18 | 74.00 | 30.82 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.37 | 42.50 | 74.00 | 31.50 | Peak |
| 4 | 2437.000 | 29.47 | 7.46 | 36.61 | 97.49 | 97.81 | 74.00 | -23.81 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

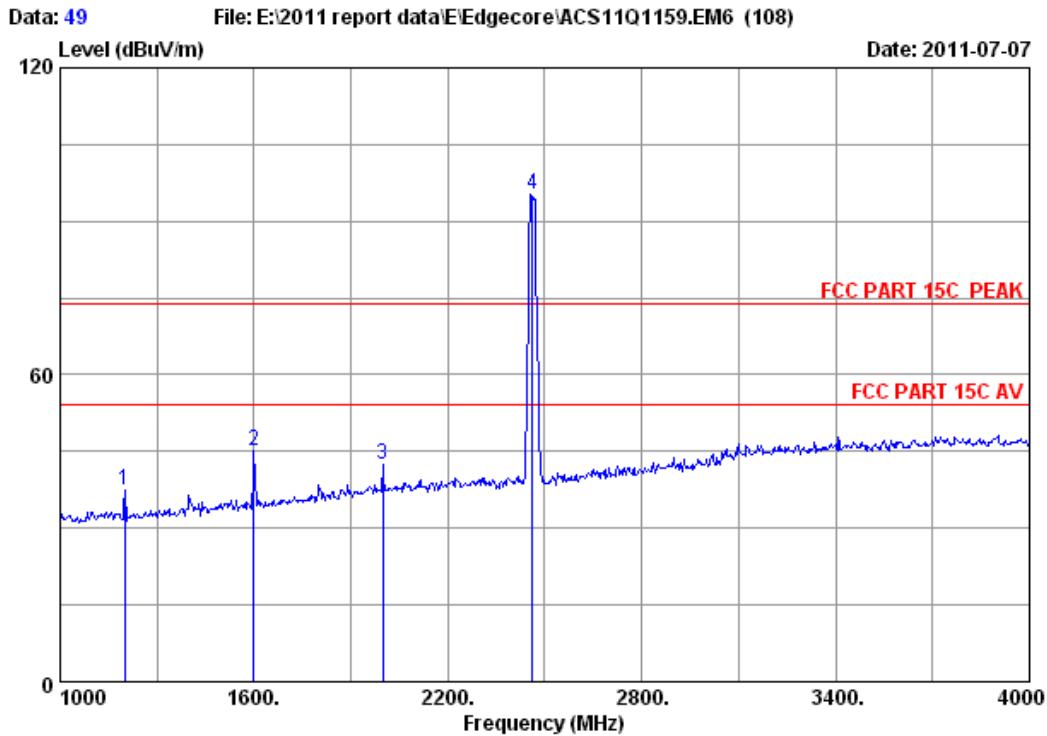


Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.02 | 37.45 | 74.00 | 36.55 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 49.21 | 45.14 | 74.00 | 28.86 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.38 | 42.51 | 74.00 | 31.49 | Peak |
| 4 | 2462.000 | 29.48 | 7.54 | 36.61 | 94.84 | 95.25 | 74.00 | -21.25 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

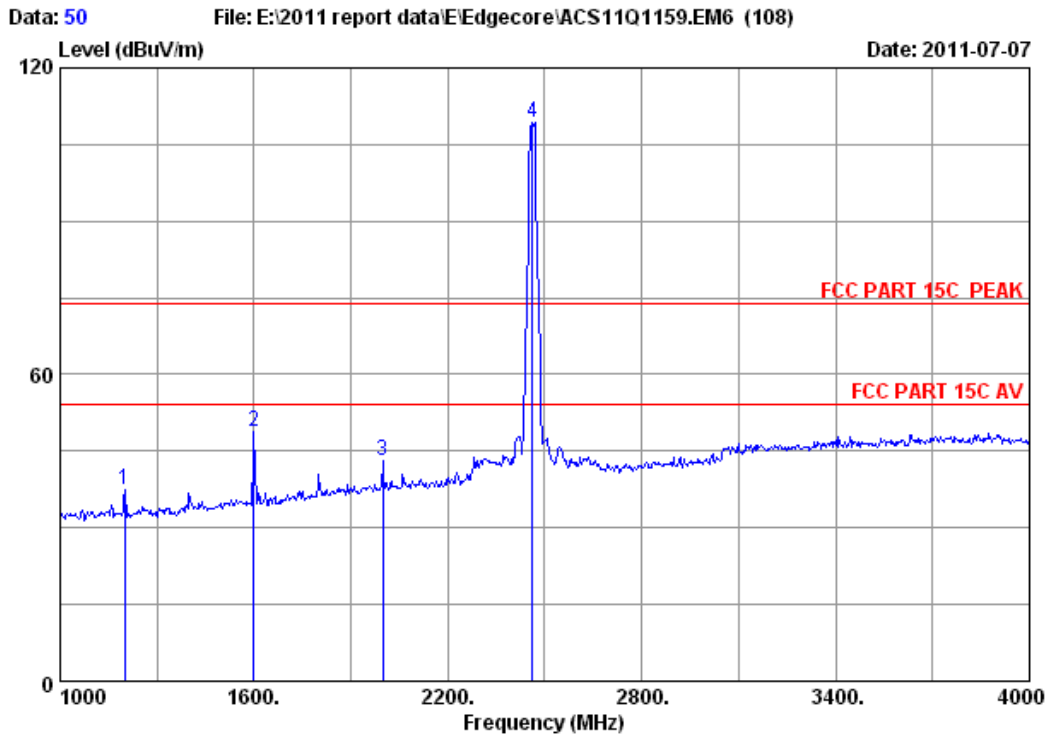


Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.02 | 37.45 | 74.00 | 36.55 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 52.91 | 48.84 | 74.00 | 25.16 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.90 | 43.03 | 74.00 | 30.97 | Peak |
| 4 | 2462.000 | 29.48 | 7.54 | 36.61 | 108.89 | 109.30 | 74.00 | -35.30 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

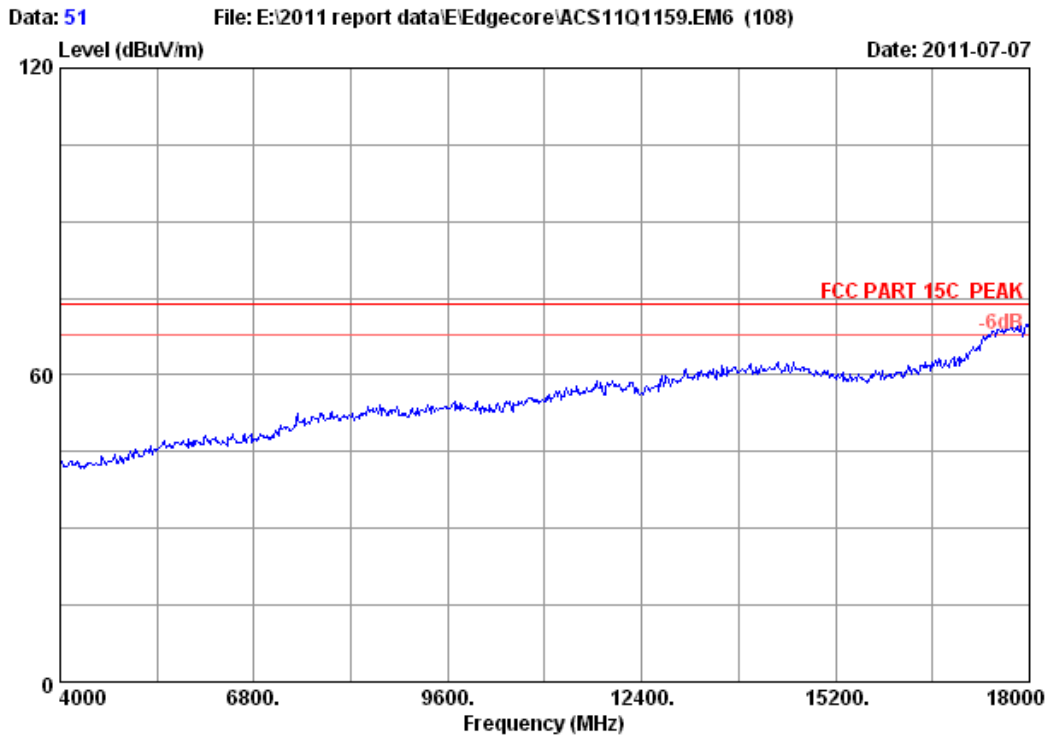

Site no. : 3m Chamber Data no. : 51
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : SMCWBR14-N5

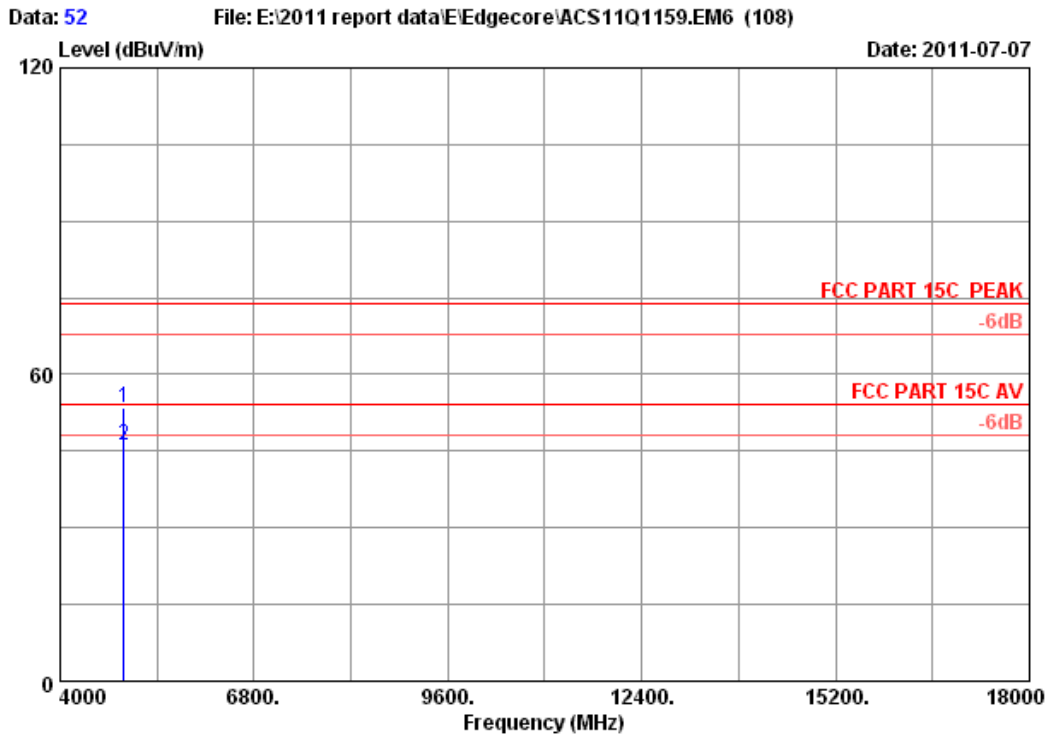


Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4924.000 | 34.49 | 10.76 | 34.98 | 43.11 | 53.38 | 74.00 | 20.62 | Peak |
| 2 | 4924.000 | 34.49 | 10.76 | 34.98 | 35.78 | 46.05 | 54.00 | 7.95 | Average |


Remarks:
 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

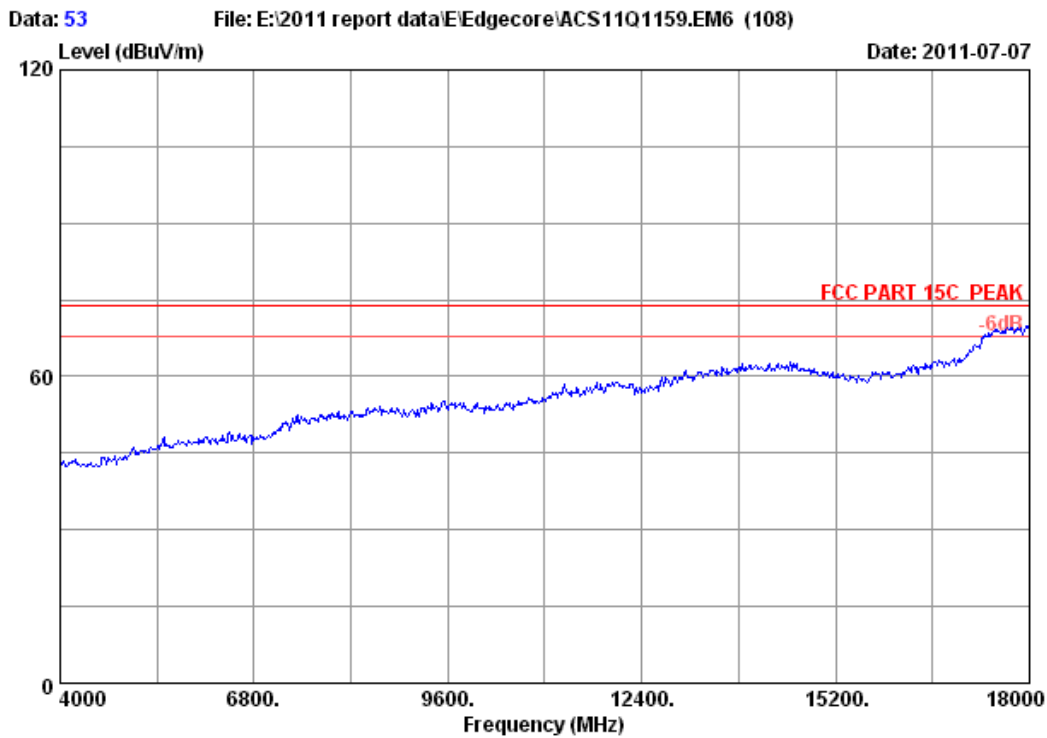

Site no. : 3m Chamber Data no. : 53
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : SMCWBR14-N5

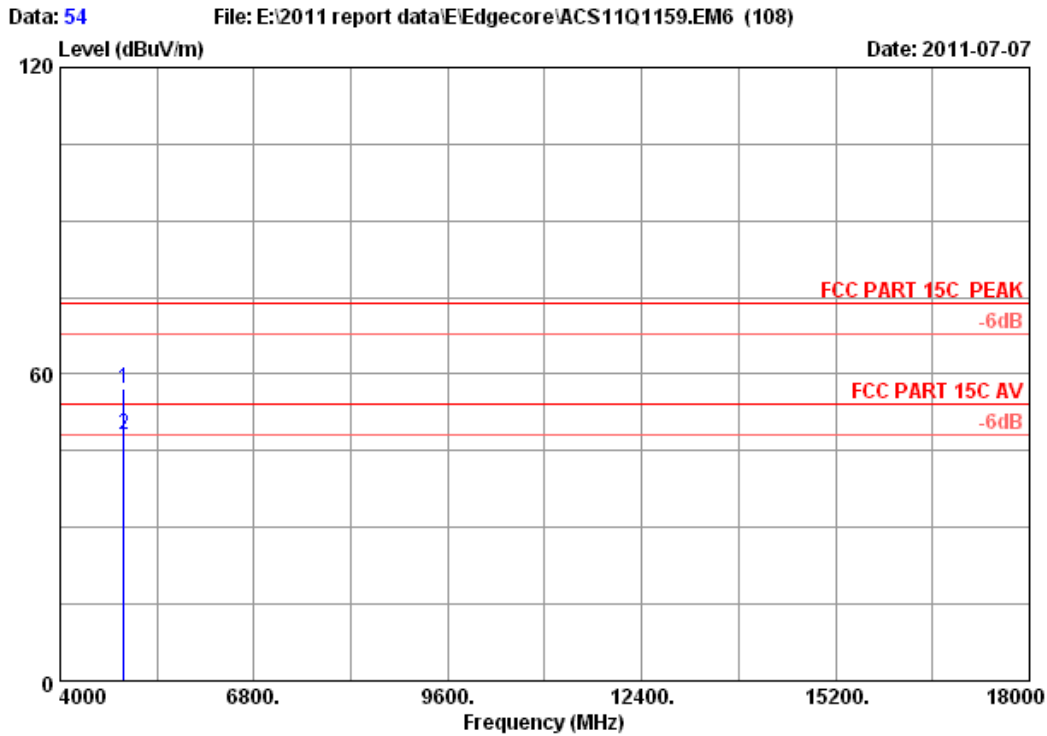


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 4924.000 | 34.49 | 10.76 | 34.98 | 46.89 | 57.16 | 74.00 | 16.84 | Peak |
| 2 | 4924.000 | 34.49 | 10.76 | 34.98 | 37.86 | 48.13 | 54.00 | 5.87 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

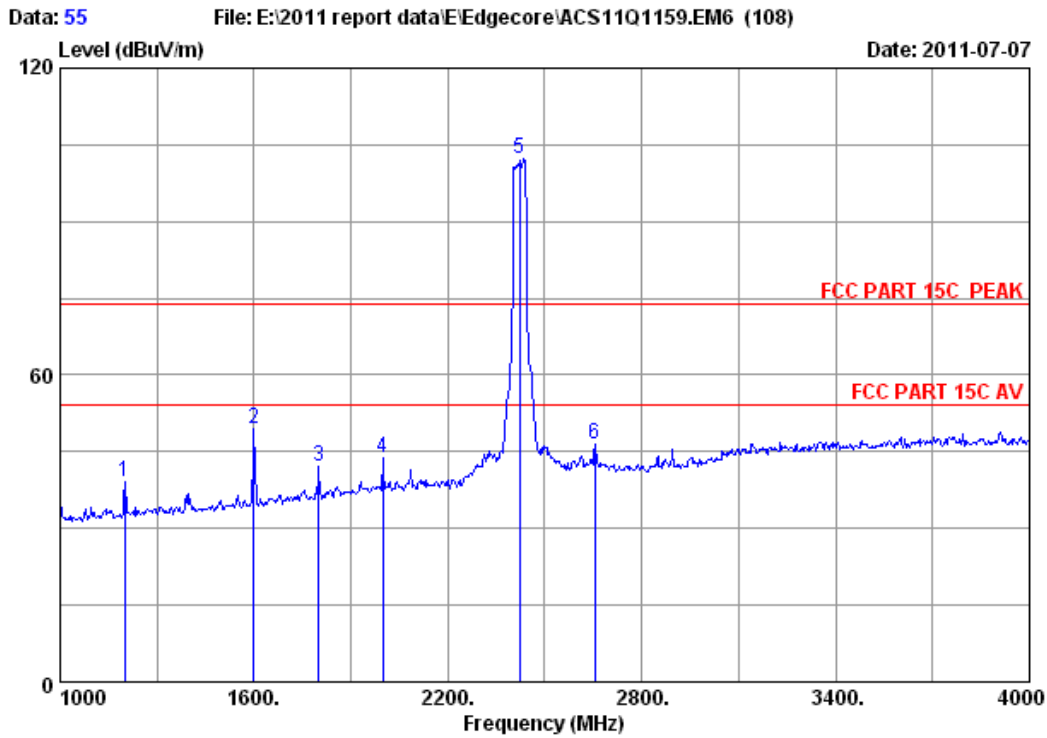

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 45.78 | 39.21 | 74.00 | 34.79 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 53.58 | 49.51 | 74.00 | 24.49 | Peak |
| 3 | 1801.000 | 28.08 | 6.29 | 36.83 | 44.41 | 41.95 | 74.00 | 32.05 | Peak |
| 4 | 1999.000 | 29.20 | 6.63 | 36.70 | 44.73 | 43.86 | 74.00 | 30.14 | Peak |
| 5 | 2422.000 | 29.46 | 7.46 | 36.61 | 101.92 | 102.23 | 74.00 | -28.23 | Peak |
| 6 | 2656.000 | 30.25 | 7.88 | 36.57 | 44.79 | 46.35 | 74.00 | 27.65 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

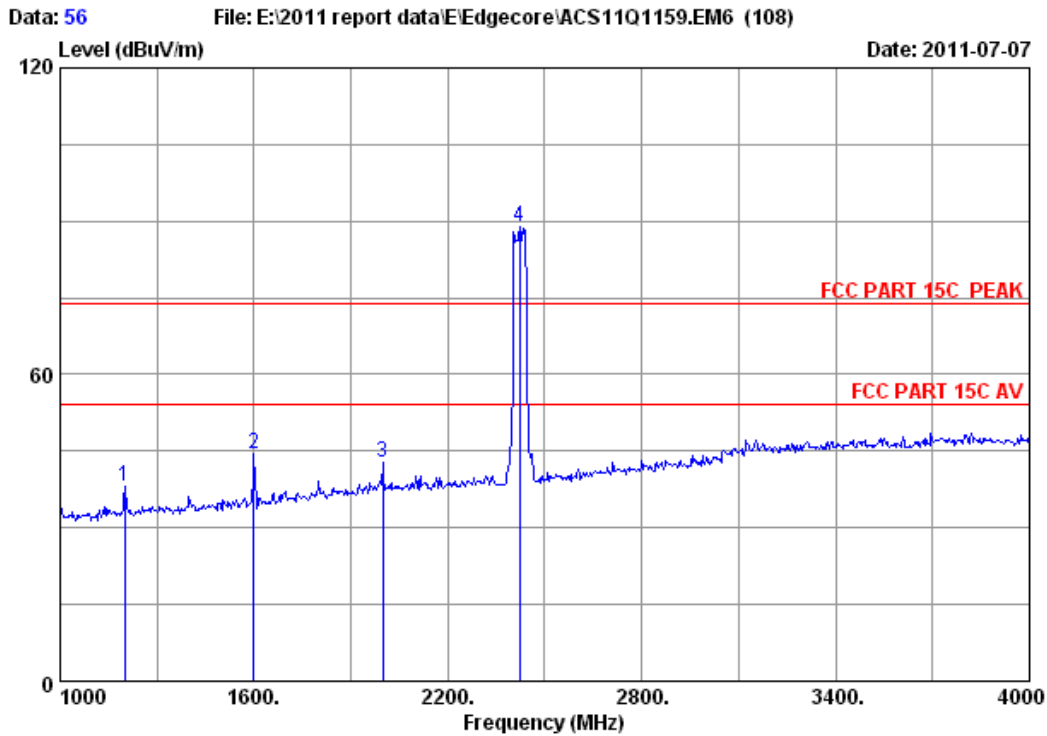


Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.81 | 38.24 | 74.00 | 35.76 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 48.38 | 44.31 | 74.00 | 29.69 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.57 | 42.70 | 74.00 | 31.30 | Peak |
| 4 | 2422.000 | 29.46 | 7.46 | 36.61 | 88.46 | 88.77 | 74.00 | -14.77 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

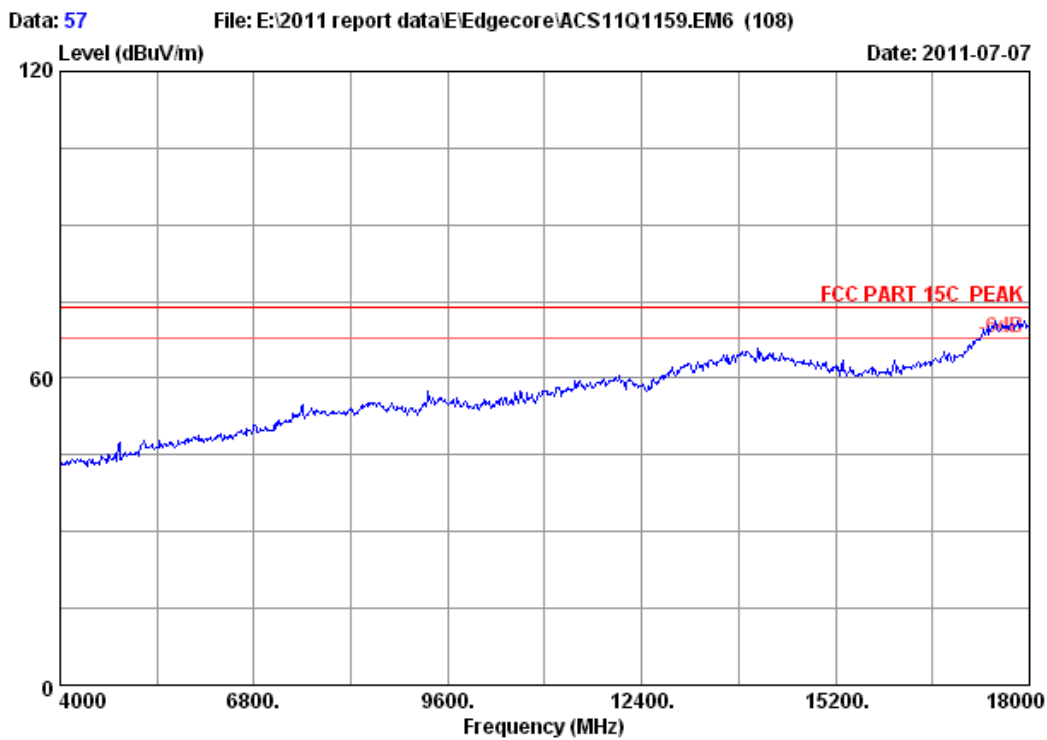

Site no. : 3m Chamber Data no. : 57
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : SMCWBR14-N5

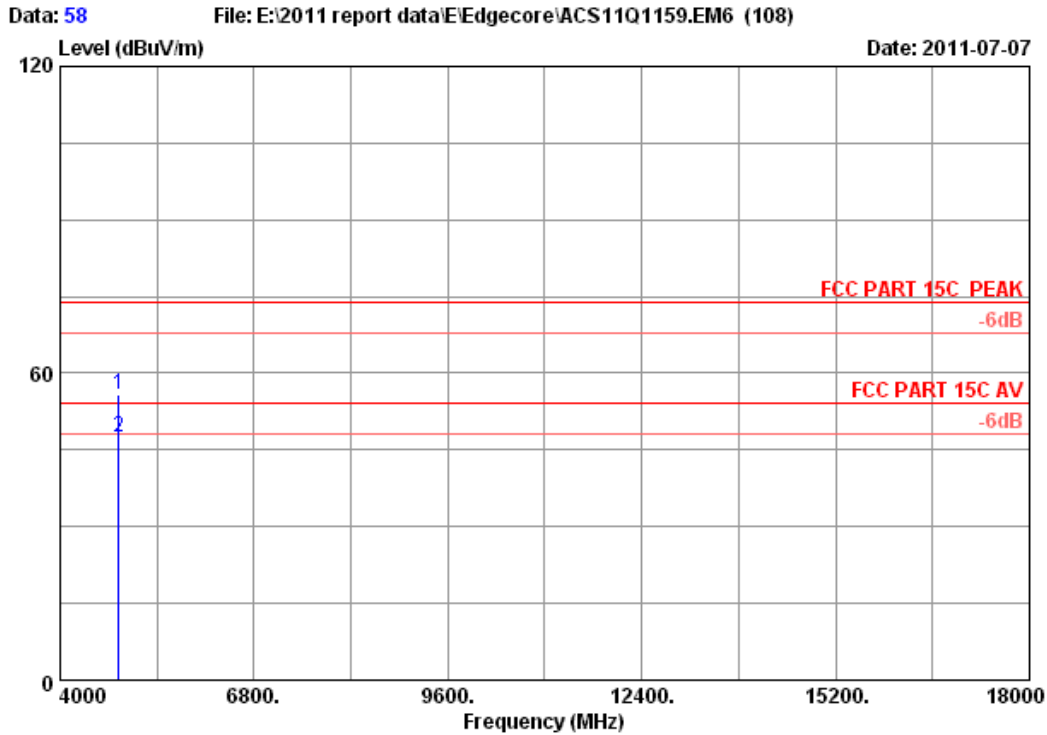


Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4844.000 | 34.35 | 10.67 | 35.05 | 45.80 | 55.77 | 74.00 | 18.23 | Peak |
| 2 | 4844.000 | 34.35 | 10.67 | 35.05 | 37.47 | 47.44 | 54.00 | 6.56 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

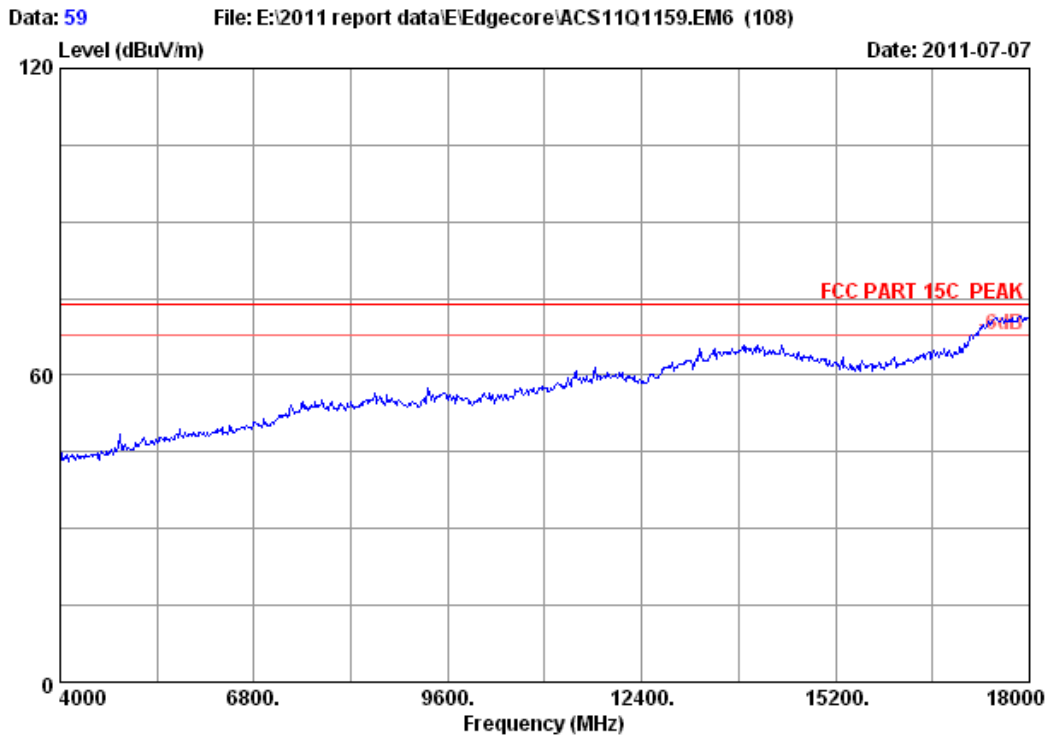

Site no. : 3m Chamber Data no. : 59
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : SMCWBR14-N5

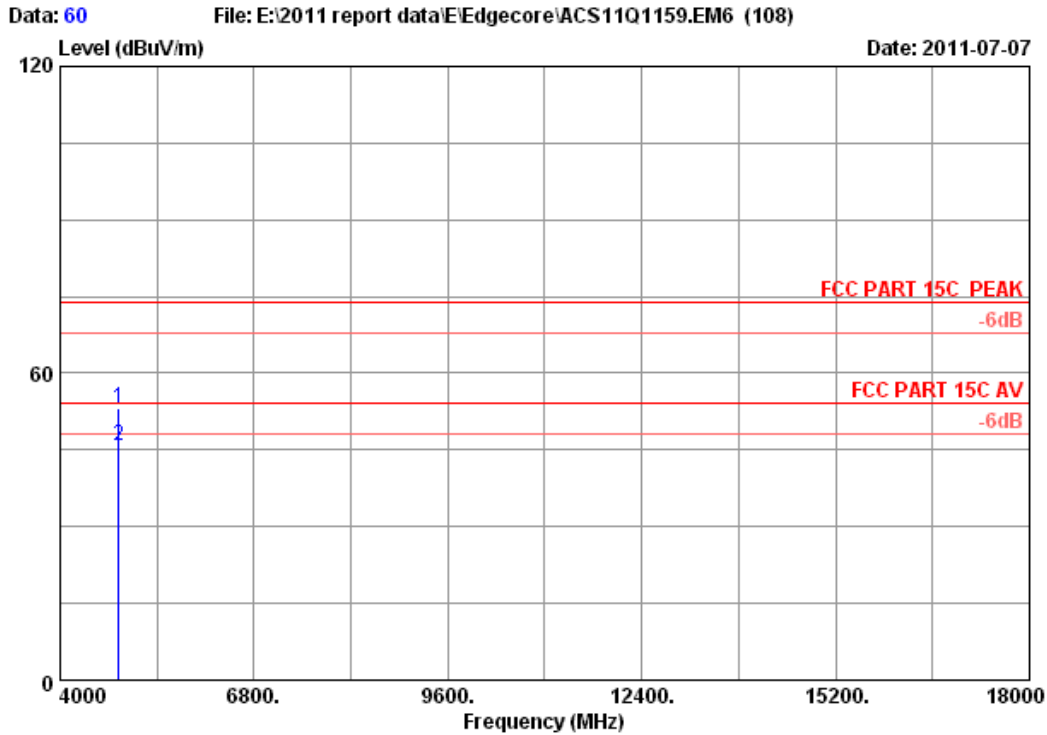


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4844.000 | 34.35 | 10.67 | 35.05 | 43.04 | 53.01 | 74.00 | 20.99 | Peak |
| 2 | 4844.000 | 34.35 | 10.67 | 35.05 | 35.78 | 45.75 | 54.00 | 8.25 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

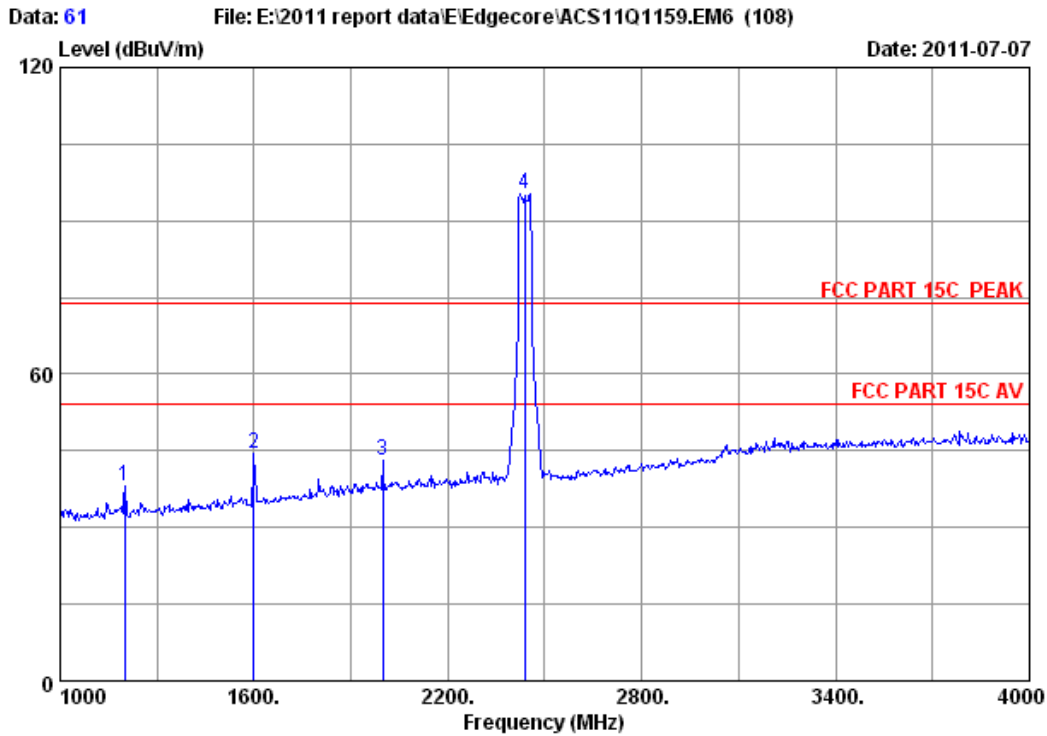


Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 44.72 | 38.15 | 74.00 | 35.85 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 48.48 | 44.41 | 74.00 | 29.59 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 43.94 | 43.07 | 74.00 | 30.93 | Peak |
| 4 | 2437.000 | 29.47 | 7.46 | 36.61 | 95.05 | 95.37 | 74.00 | -21.37 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

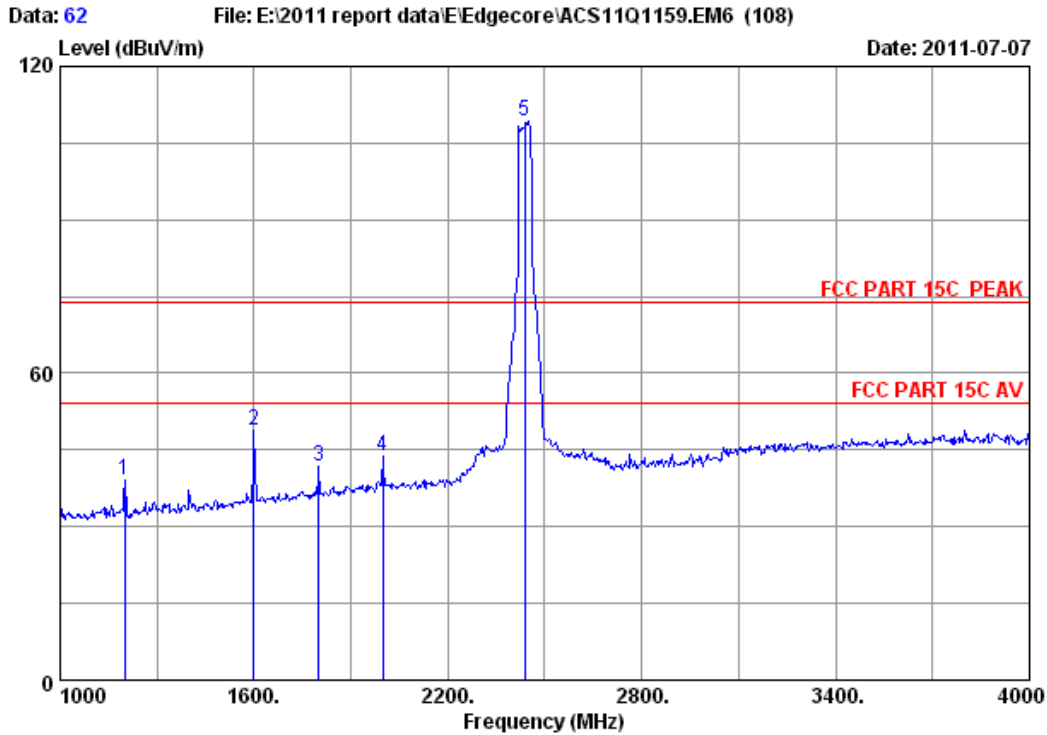

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 45.68 | 39.11 | 74.00 | 34.89 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 52.78 | 48.71 | 74.00 | 25.29 | Peak |
| 3 | 1801.000 | 28.08 | 6.29 | 36.83 | 44.20 | 41.74 | 74.00 | 32.26 | Peak |
| 4 | 1999.000 | 29.20 | 6.63 | 36.70 | 44.61 | 43.74 | 74.00 | 30.26 | Peak |
| 5 | 2437.000 | 29.47 | 7.46 | 36.61 | 108.98 | 109.30 | 74.00 | -35.30 | Peak |

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

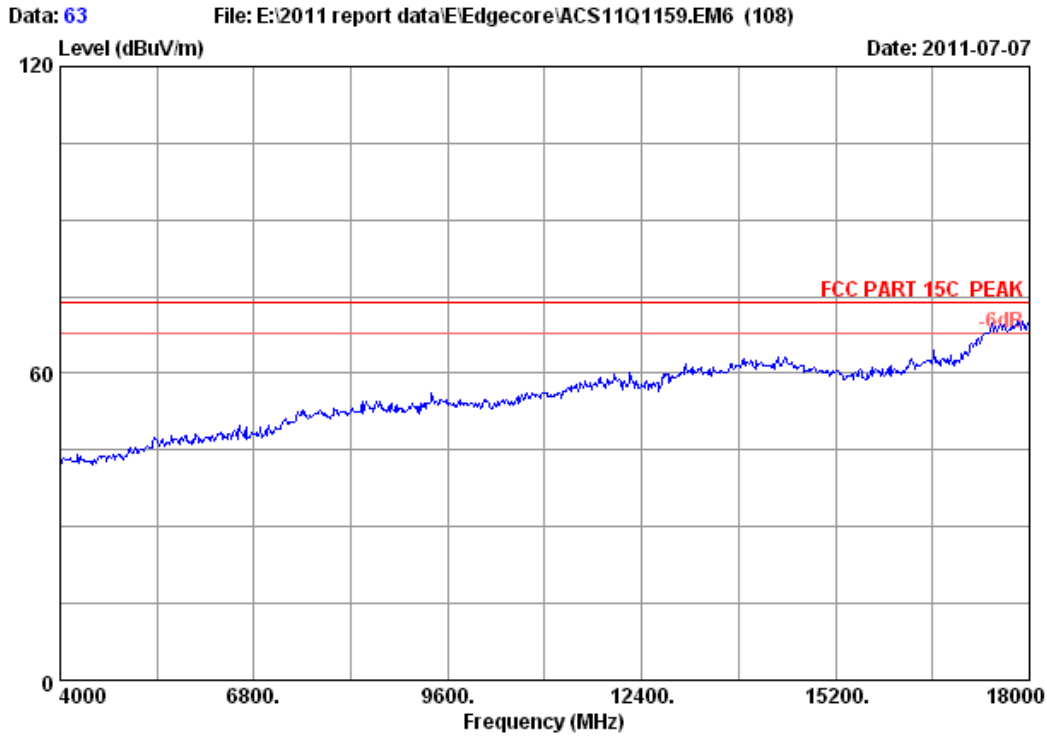

Site no. : 3m Chamber Data no. : 63
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
M/N : SMCWBR14-N5

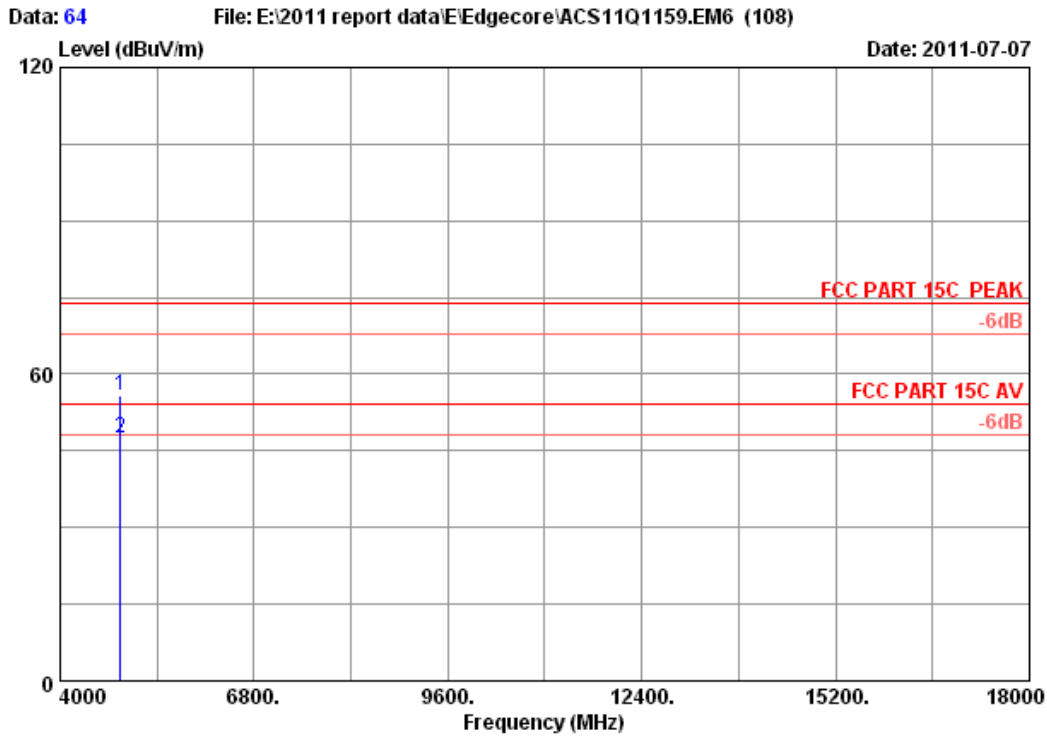

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
 M/N : SMCWBR14-N5


| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 4874.000 | 34.41 | 10.69 | 35.03 | 45.86 | 55.93 | 74.00 | 18.07 | Peak |
| 2 | 4874.000 | 34.41 | 10.69 | 35.03 | 37.49 | 47.56 | 54.00 | 6.44 | Average |

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: YZKSMCWBR14N5

page

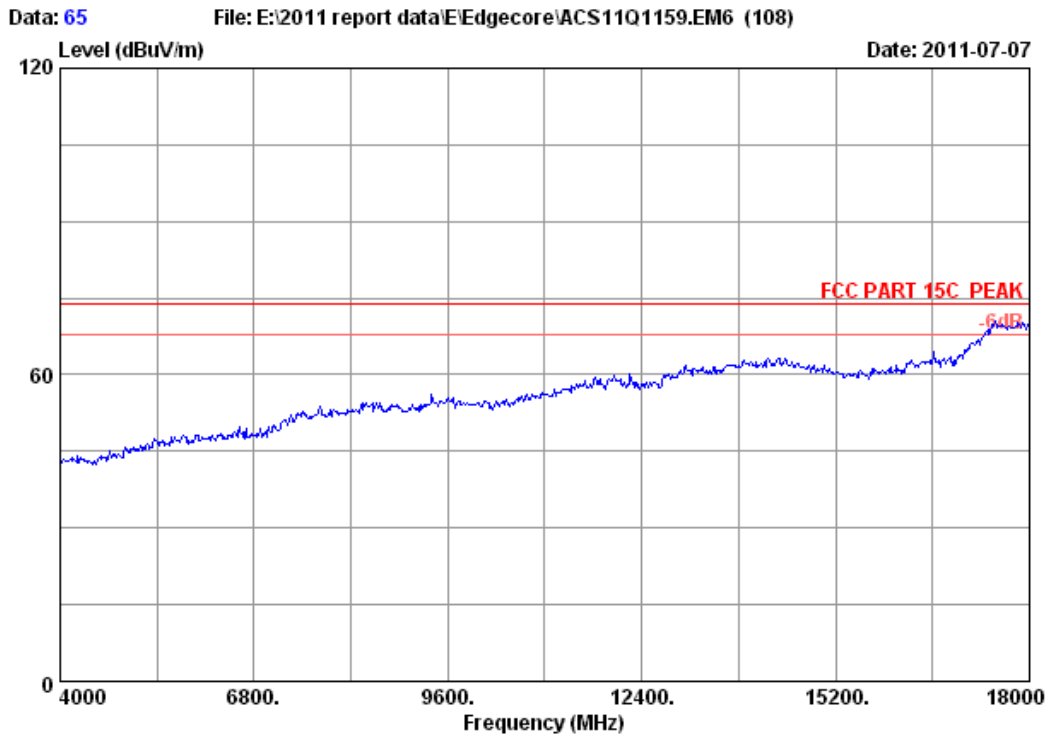


| | | | |
|-------------|---|-------------|------------|
| Site no. | : 3m Chamber | Data no. : | 65 |
| Dis. / Ant. | : 3m 3115(0911) | Ant. pol. : | HORIZONTAL |
| Limit | : FCC PART 15C PEAK | | |
| Env. / Ins. | : 23°C/54% | Engineer : | Leo-Li |
| EUT | : 300 Mbps 4-port Wireless Broadband Router | | |
| Power | : DC 9V From Adapter Input AC 120V/60Hz | | |
| Test mode | : IEEE802.11n HT40 CH4 2437MHz Tx | | |
| M/N | : SMCWBR14-N5 | | |

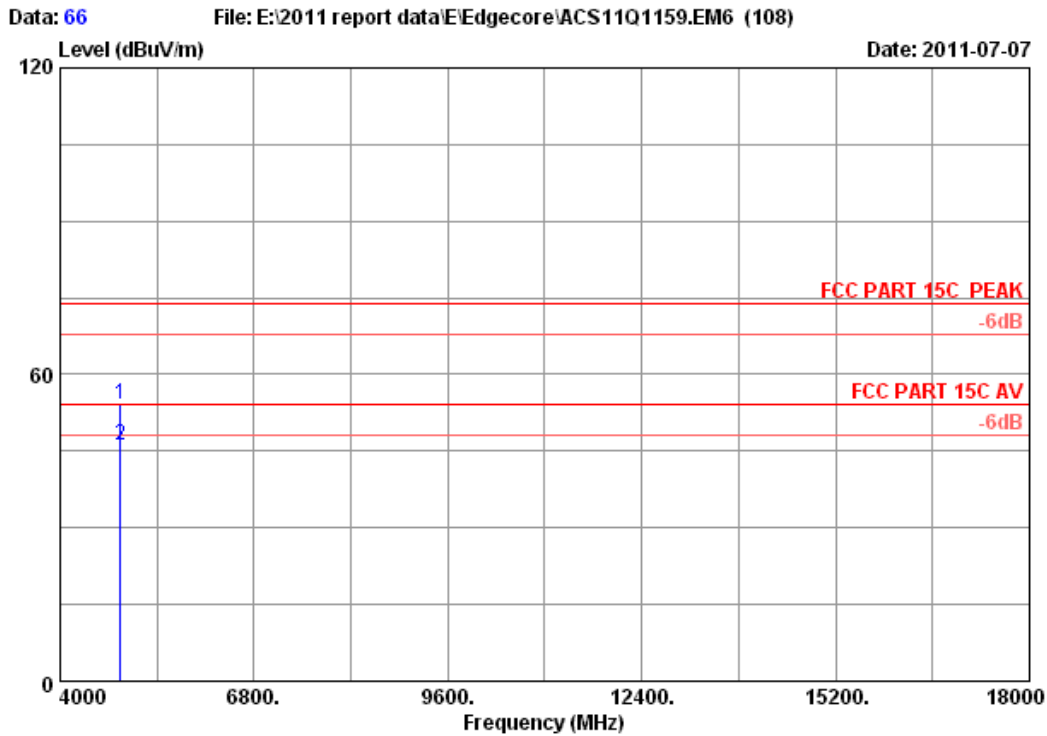

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4874.000 | 34.41 | 10.69 | 35.03 | 43.93 | 54.00 | 74.00 | 20.00 | Peak |
| 2 | 4874.000 | 34.41 | 10.69 | 35.03 | 36.07 | 46.14 | 54.00 | 7.86 | Average |

Remarks:
 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

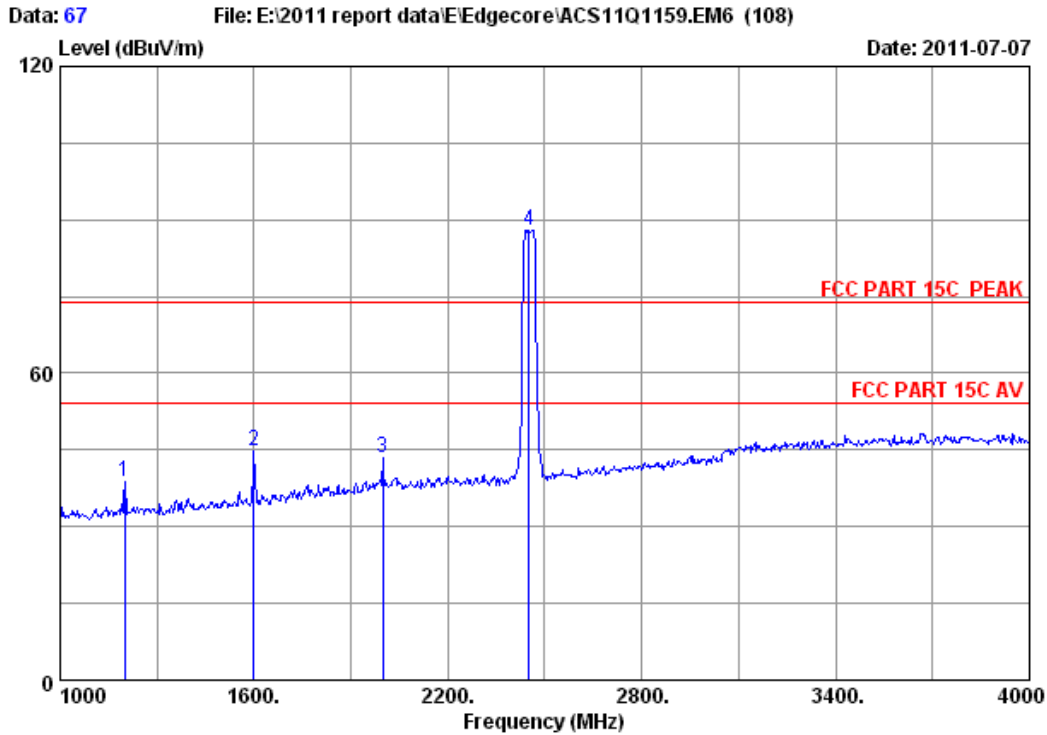


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 45.23 | 38.66 | 74.00 | 35.34 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 48.86 | 44.79 | 74.00 | 29.21 | Peak |
| 3 | 1999.000 | 29.20 | 6.63 | 36.70 | 44.33 | 43.46 | 74.00 | 30.54 | Peak |
| 4 | 2452.000 | 29.47 | 7.50 | 36.61 | 87.70 | 88.06 | 74.00 | -14.06 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

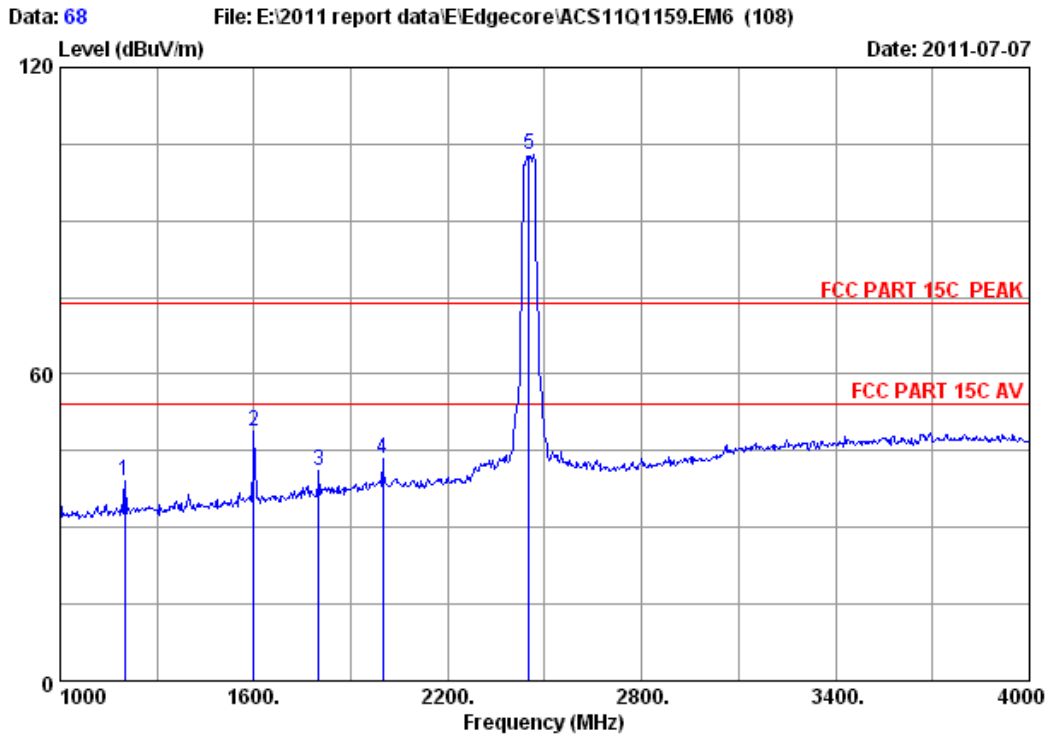


Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 1201.000 | 25.81 | 5.16 | 37.54 | 45.71 | 39.14 | 74.00 | 34.86 | Peak |
| 2 | 1600.000 | 26.96 | 5.91 | 36.94 | 52.74 | 48.67 | 74.00 | 25.33 | Peak |
| 3 | 1801.000 | 28.08 | 6.29 | 36.83 | 43.42 | 40.96 | 74.00 | 33.04 | Peak |
| 4 | 1999.000 | 29.20 | 6.63 | 36.70 | 44.33 | 43.46 | 74.00 | 30.54 | Peak |
| 5 | 2452.000 | 29.47 | 7.50 | 36.61 | 102.53 | 102.89 | 74.00 | -28.89 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

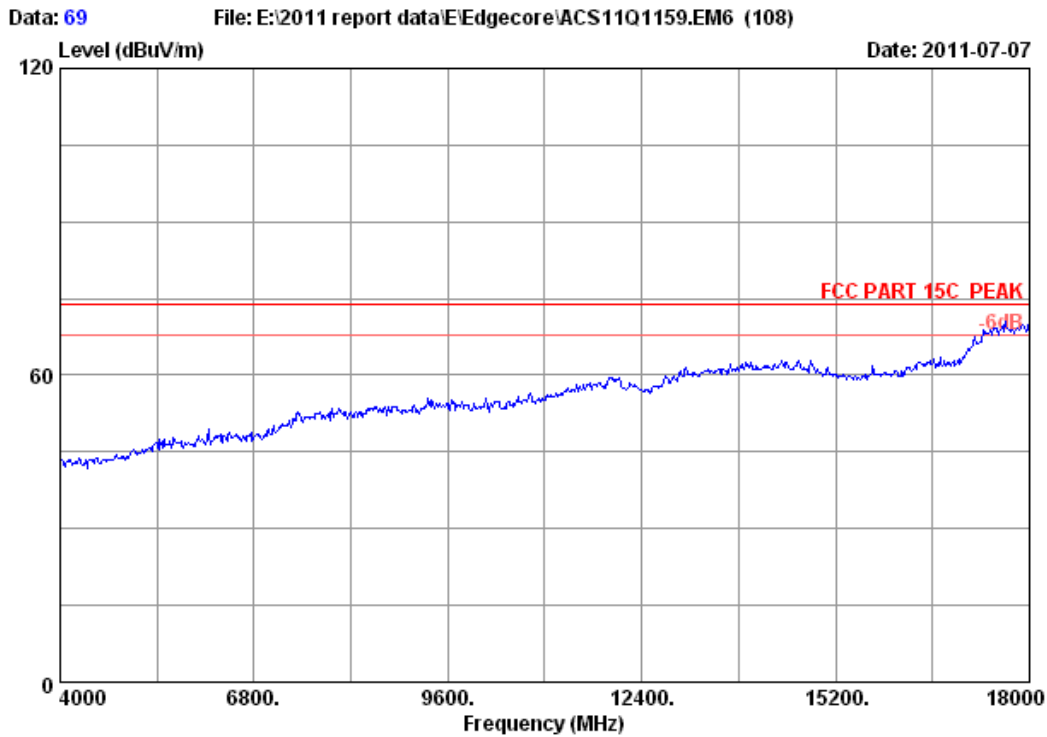

Site no. : 3m Chamber Data no. : 69
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : SMCWBR14-N5

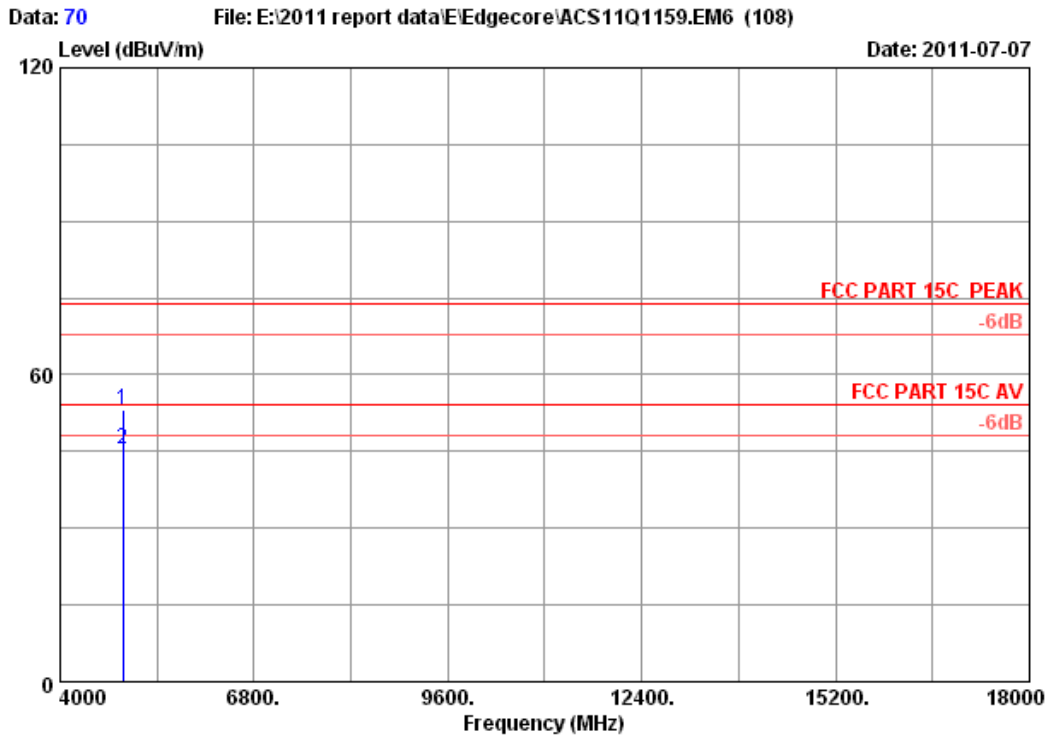


Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : SMCWBR14-N5


| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4904.000 | 34.46 | 10.74 | 35.00 | 42.99 | 53.19 | 74.00 | 20.81 | Peak |
| 2 | 4904.000 | 34.46 | 10.74 | 35.00 | 35.19 | 45.39 | 54.00 | 8.61 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

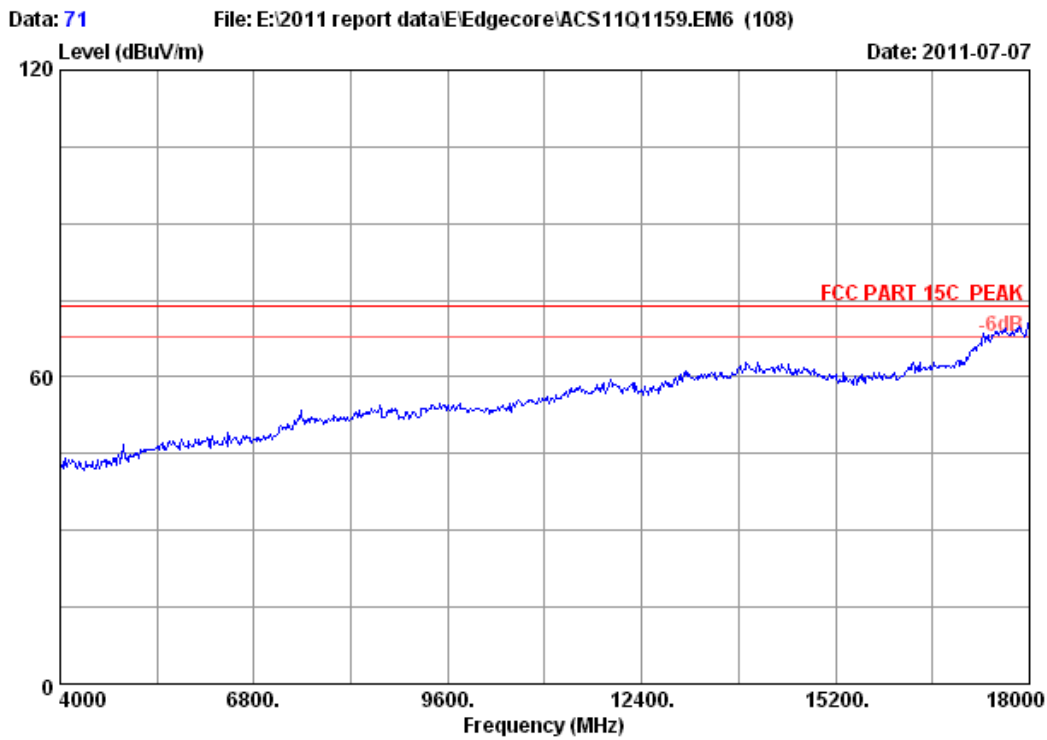

Site no. : 3m Chamber Data no. : 71
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 300 Mbps 4-port Wireless Broadband Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : SMCWBR14-N5

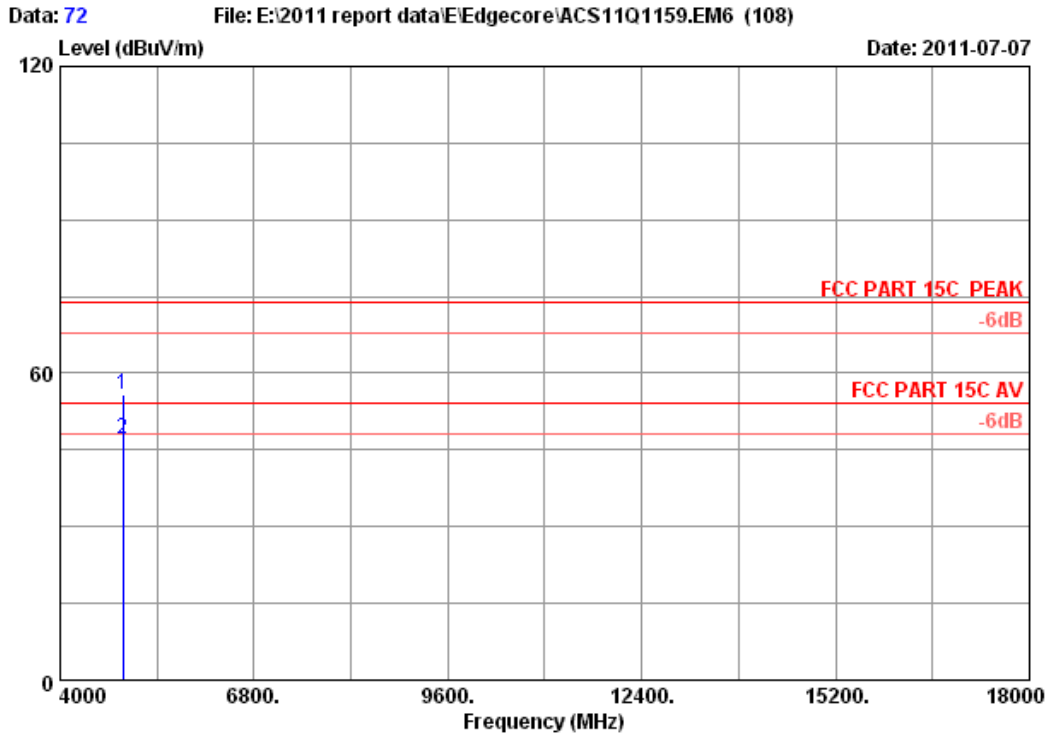

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 4904.000 | 34.46 | 10.74 | 35.00 | 45.46 | 55.66 | 74.00 | 18.34 | Peak |
| 2 | 4904.000 | 34.46 | 10.74 | 35.00 | 36.97 | 47.17 | 54.00 | 6.83 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|--------------|-------------|------------|-----------|---------------|
| 1. | Spectrum Analyzer | Agilent | E4446A | US44300459 | May.08,11 | 1 Year |
| 2. | Attenuator | Agilent | 8491B | MY39262165 | May.08,11 | 1 Year |
| 3. | RF Cable | Hubersuhner | SUCOFLEX102 | 28618/2 | May.08,11 | 1Year |

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.



5.3. Test Procedure



The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions detected.



5.4. Test result


PASS (The testing data was attached in the next pages.)

Chain0
 Test Mode: IEEE 802.11b TX
 CH1

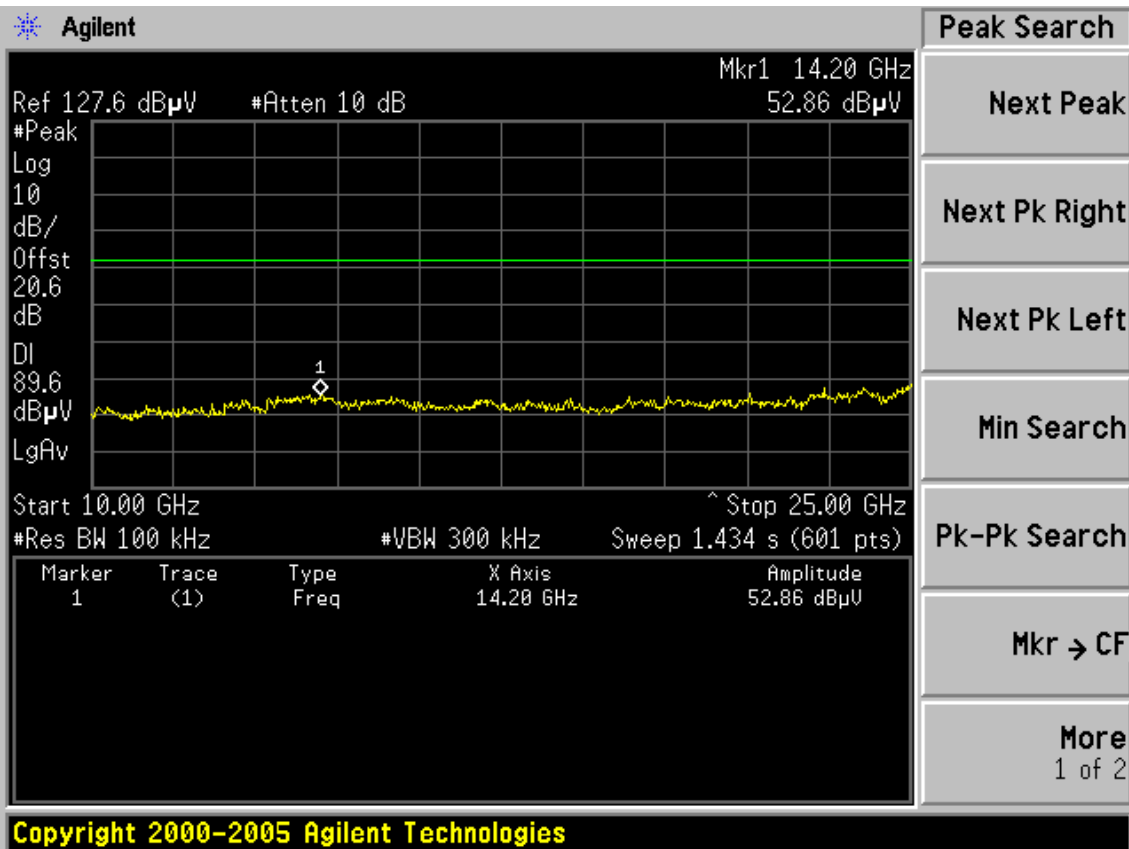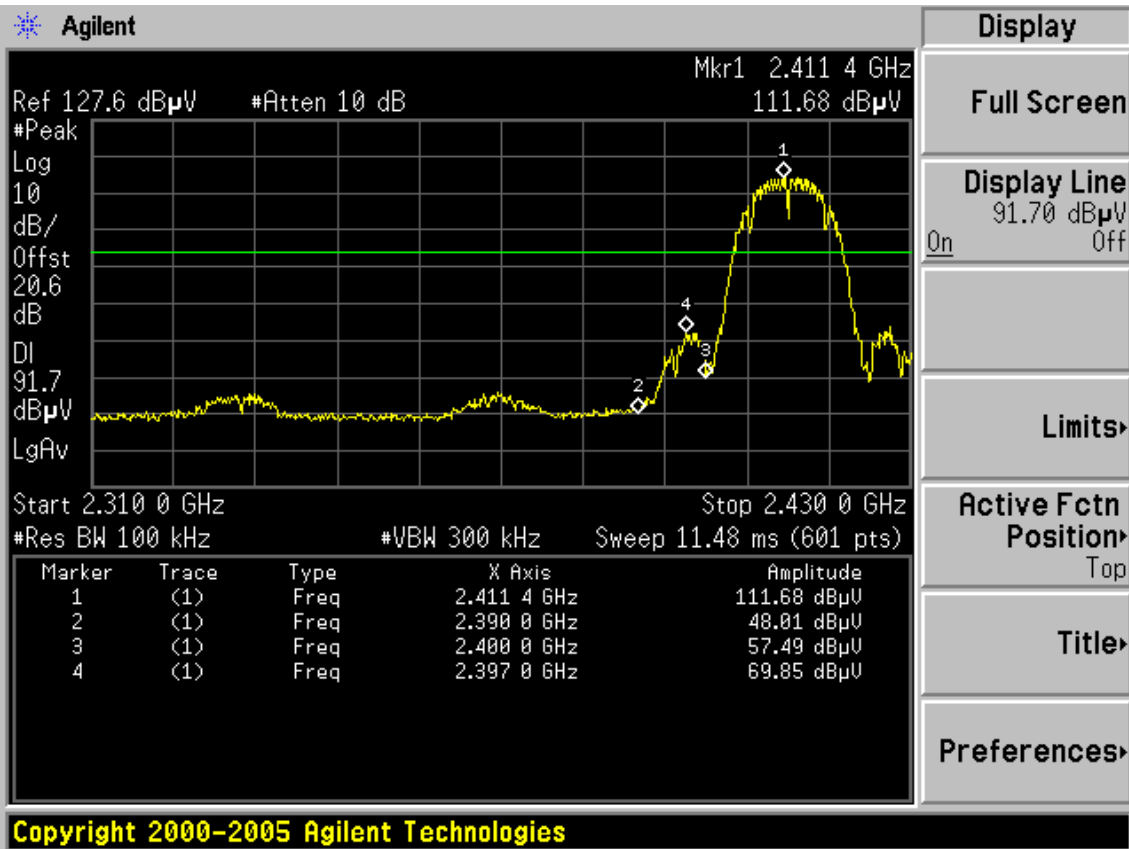

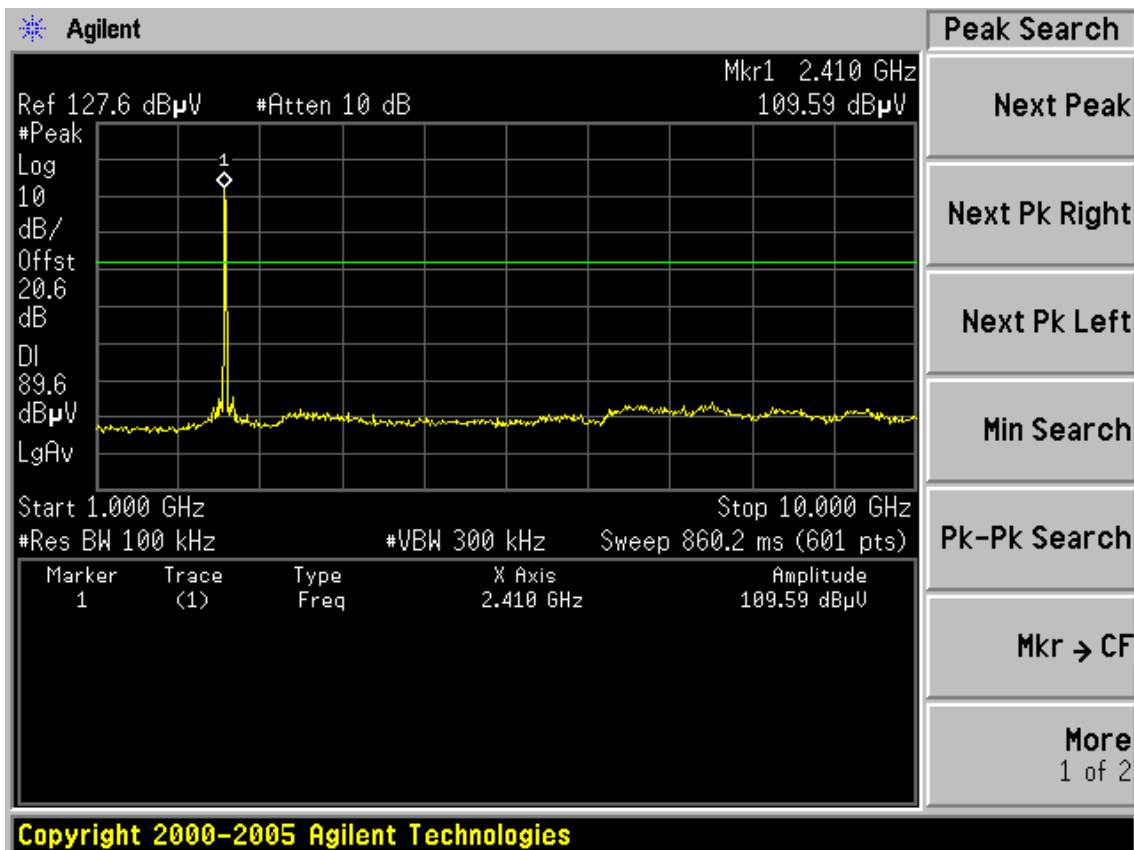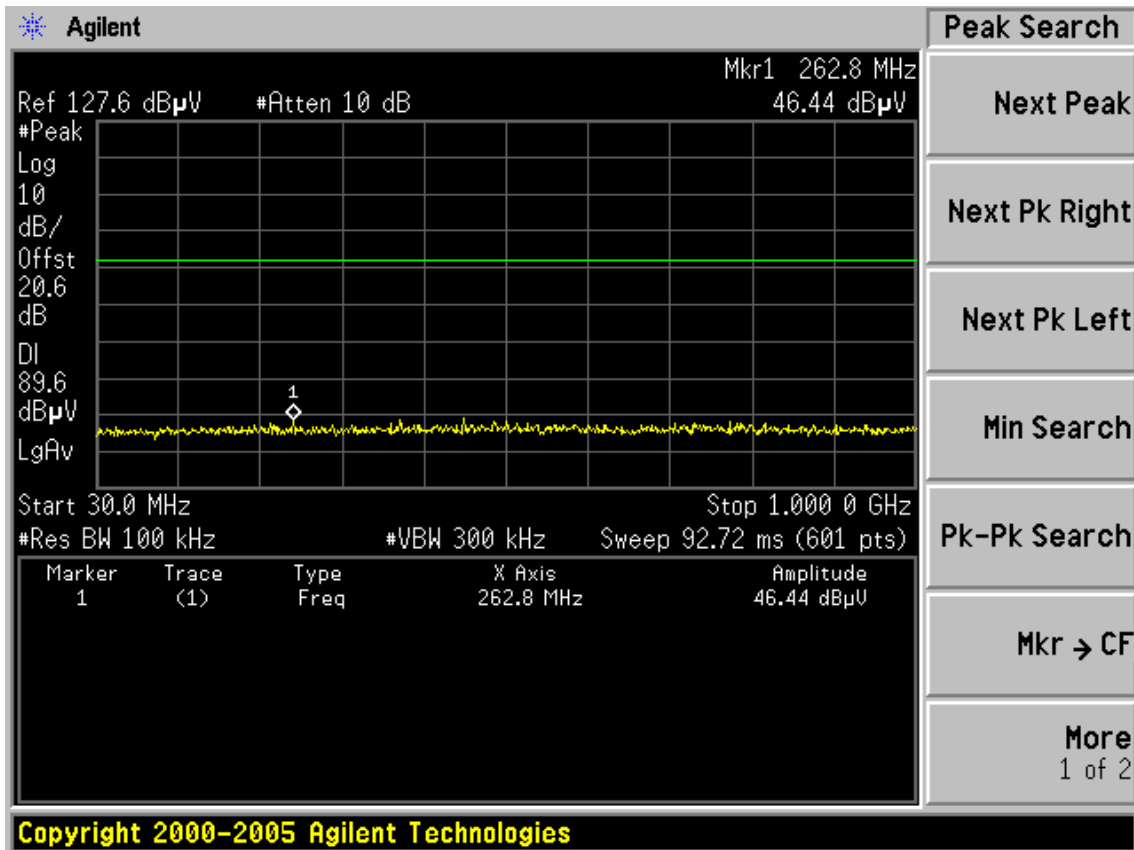


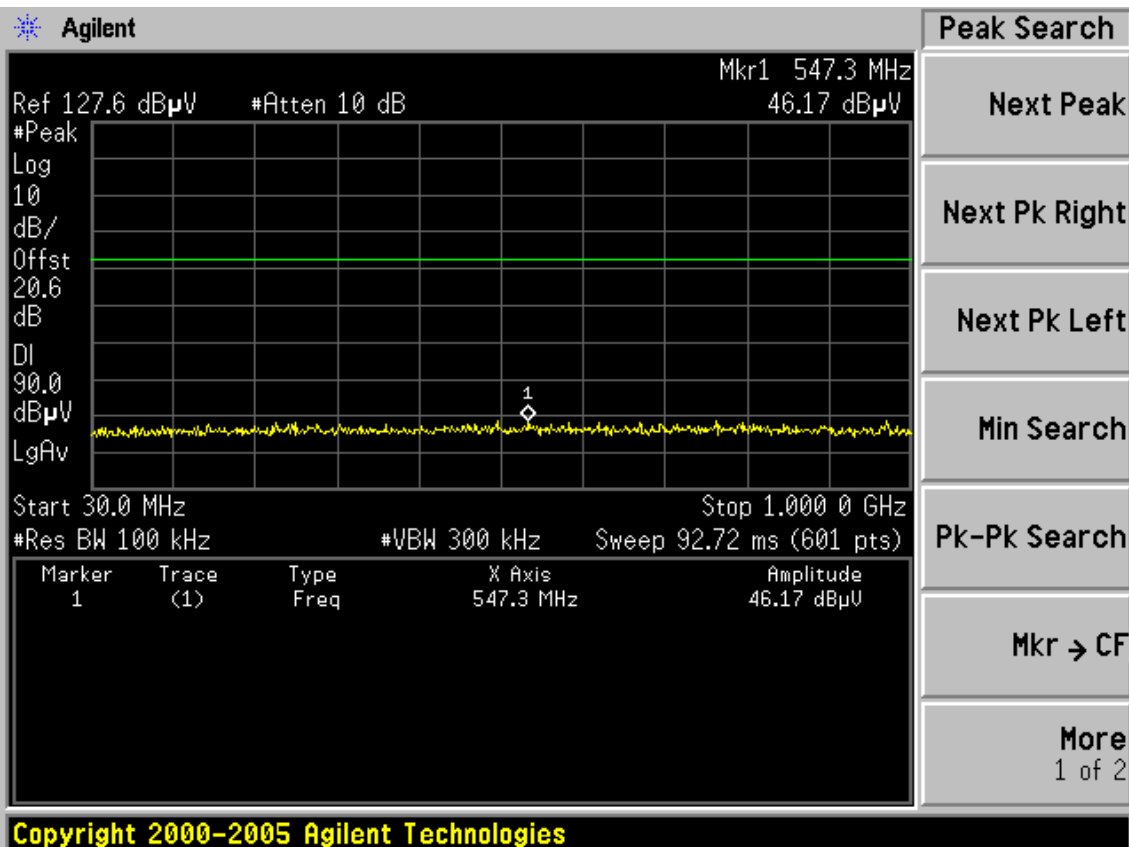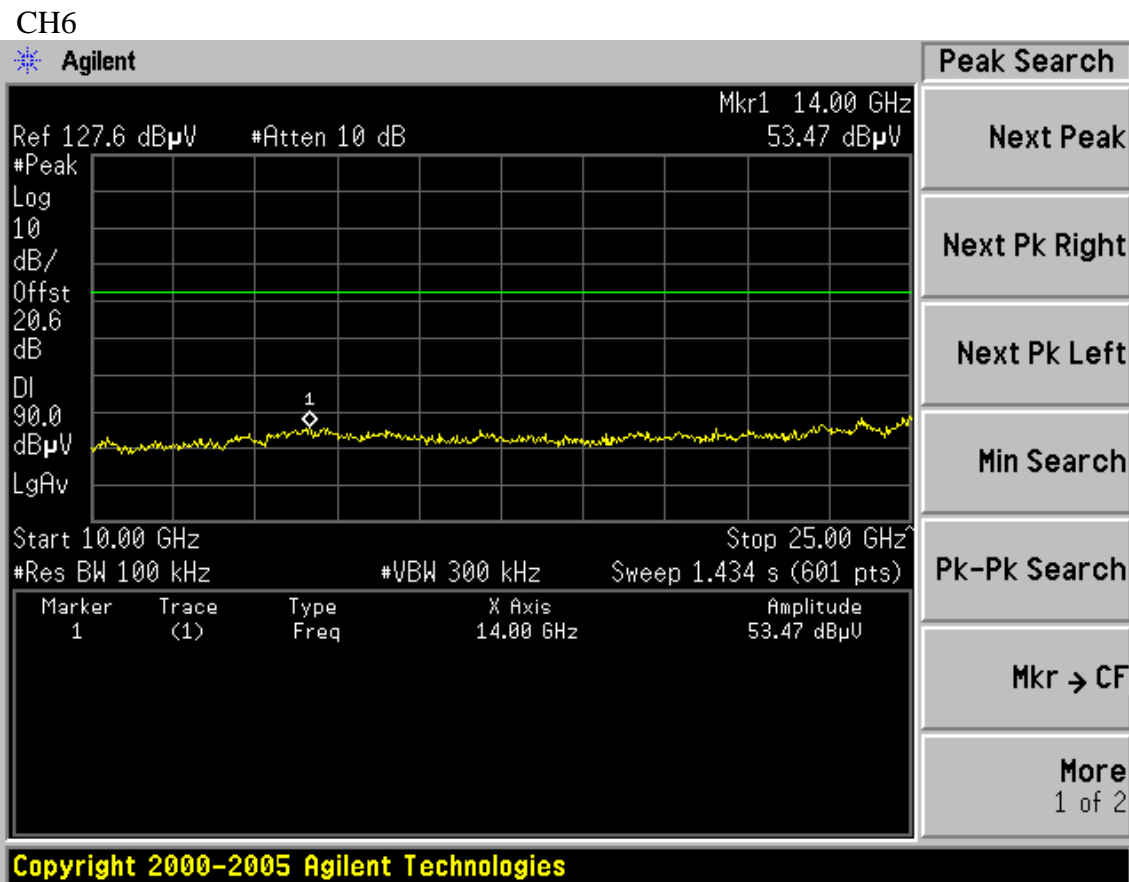


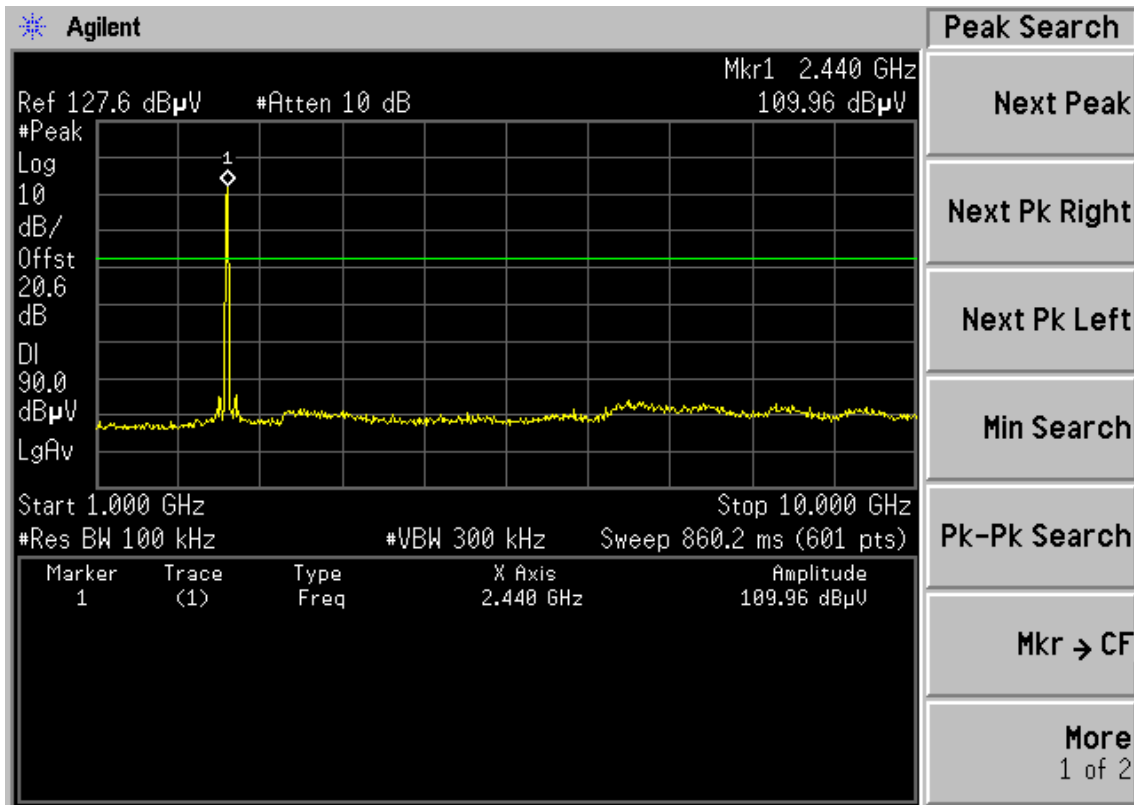



Copyright 2000-2005 Agilent Technologies

CH11

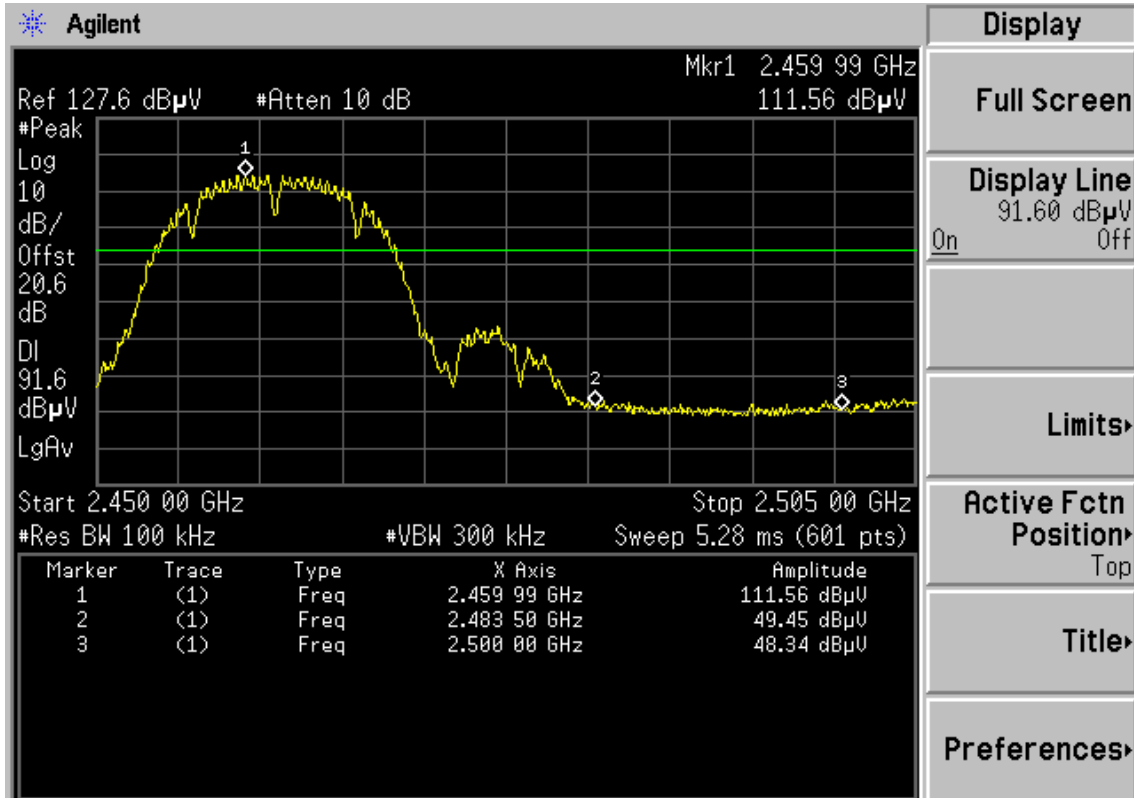




Copyright 2000-2005 Agilent Technologies

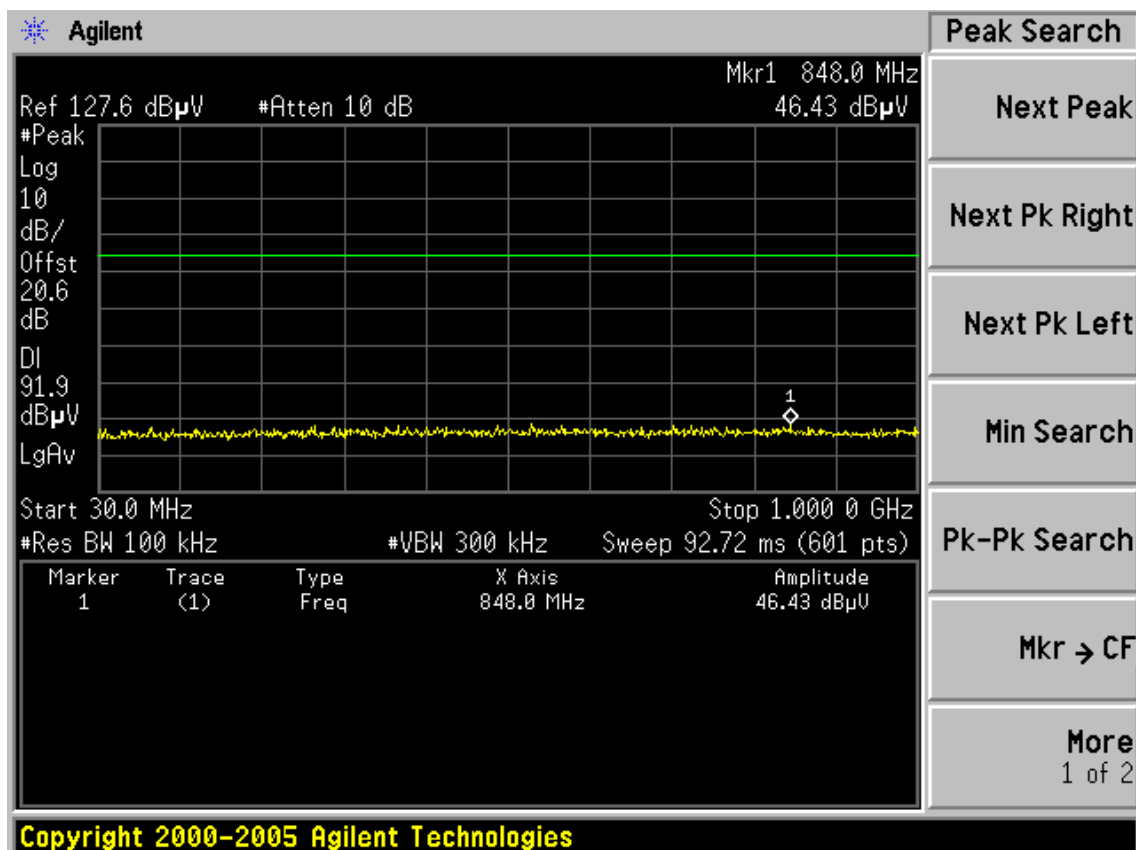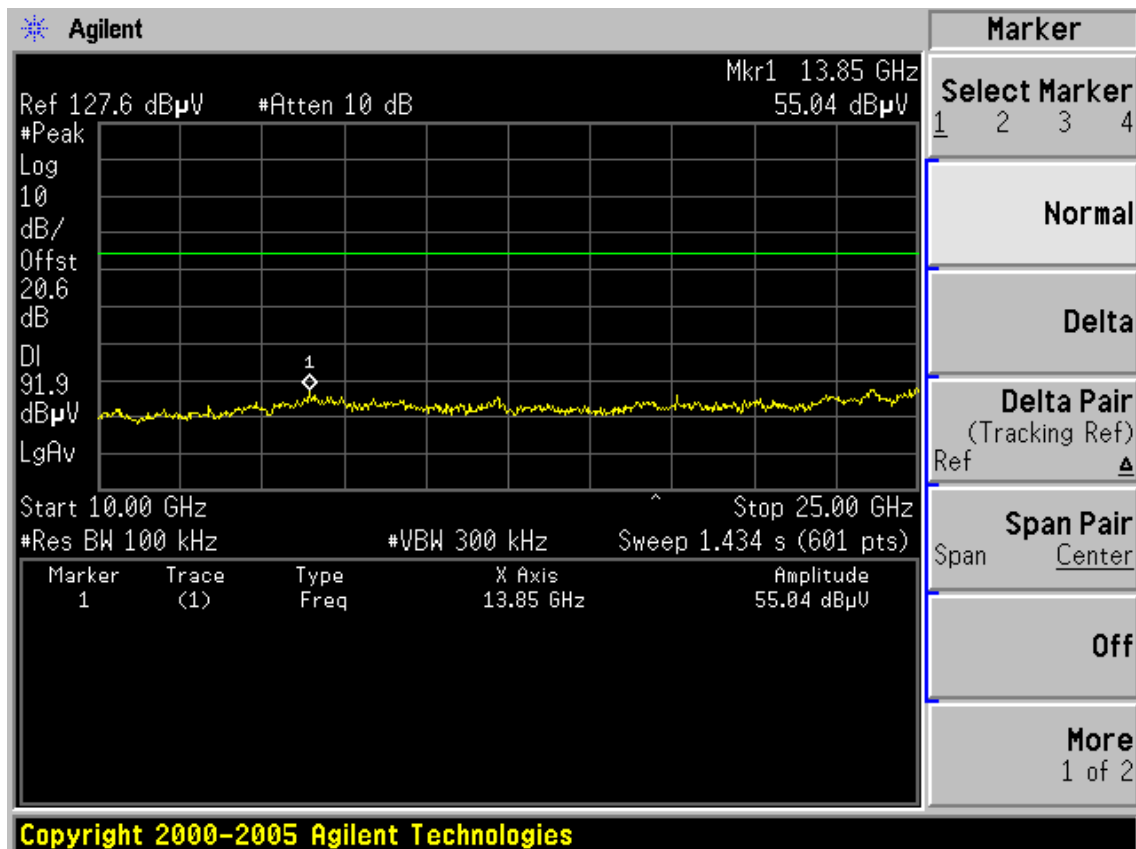


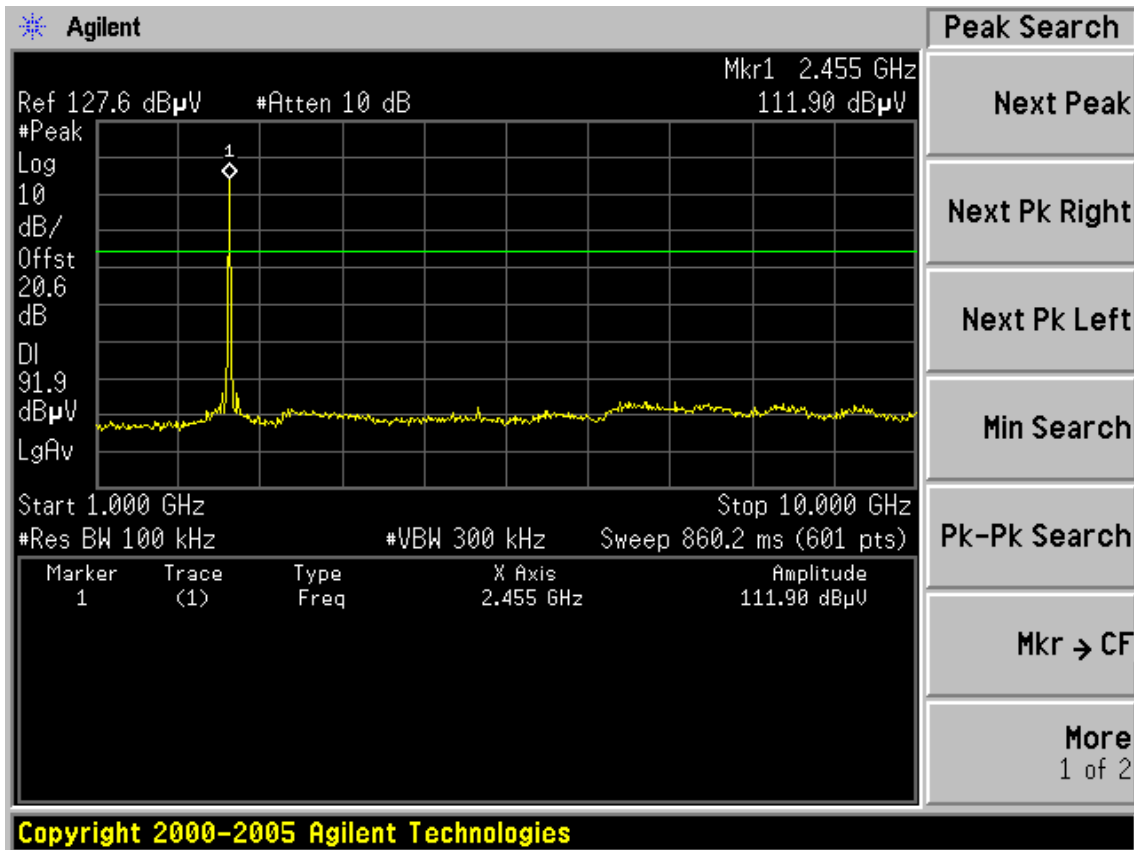


Test Mode: IEEE 802.11g TX
CH1


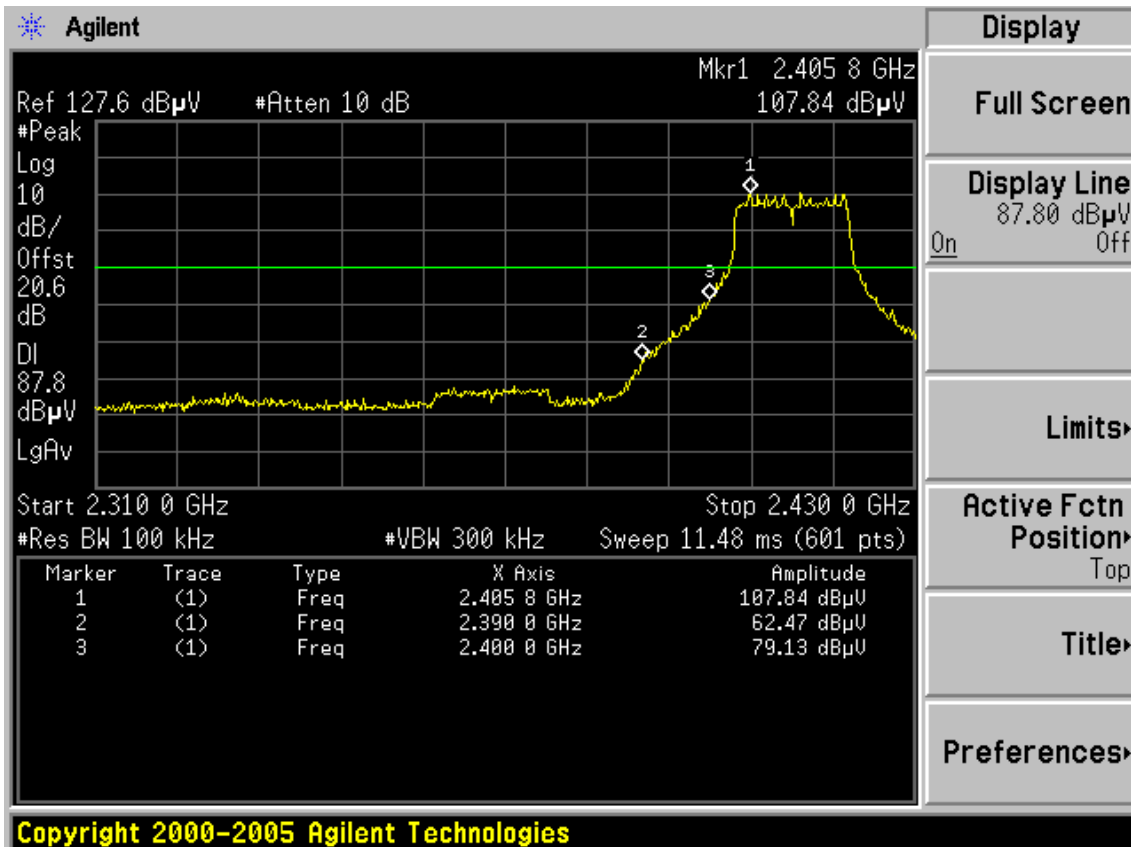


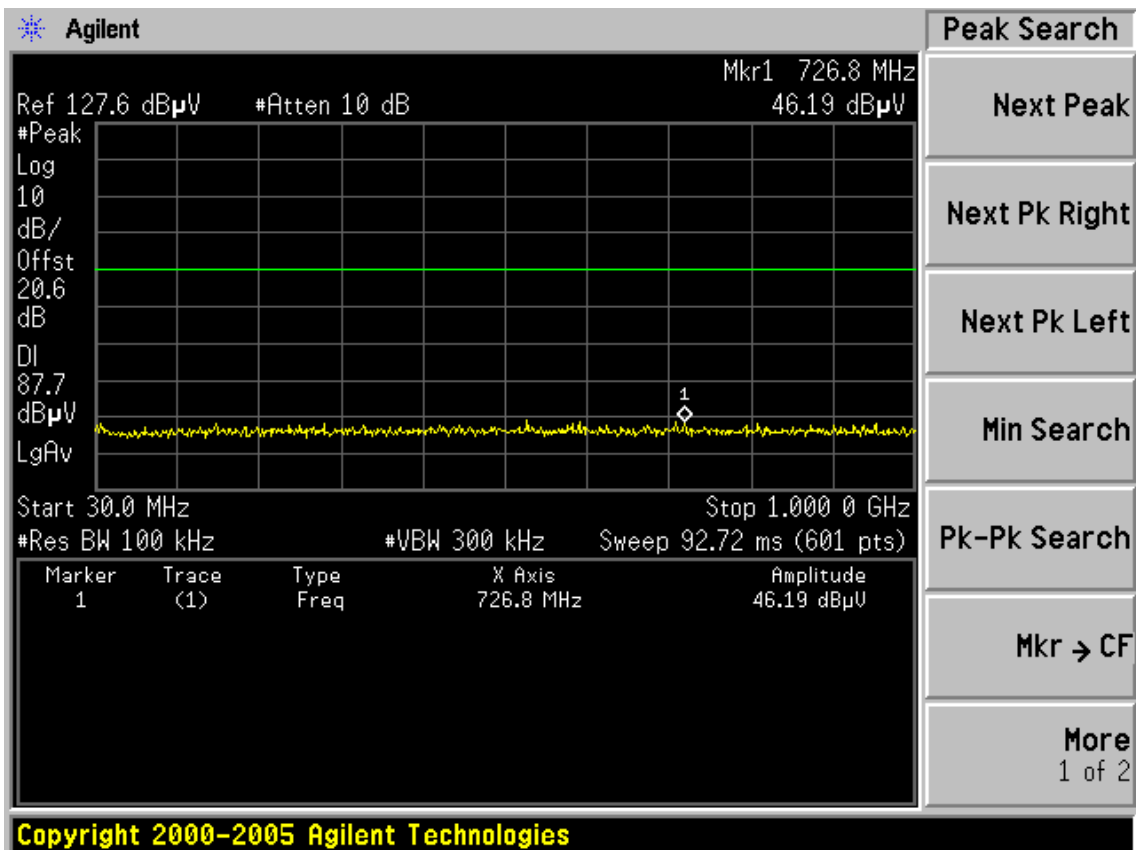
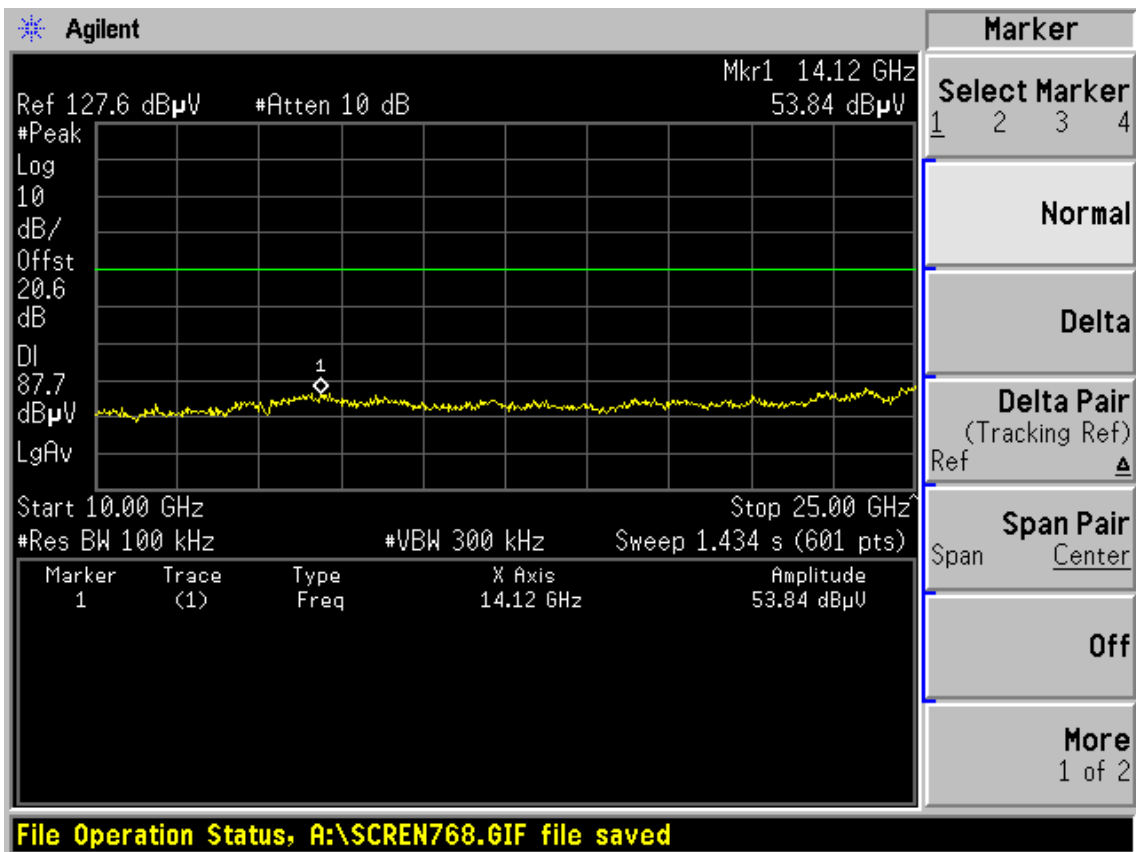



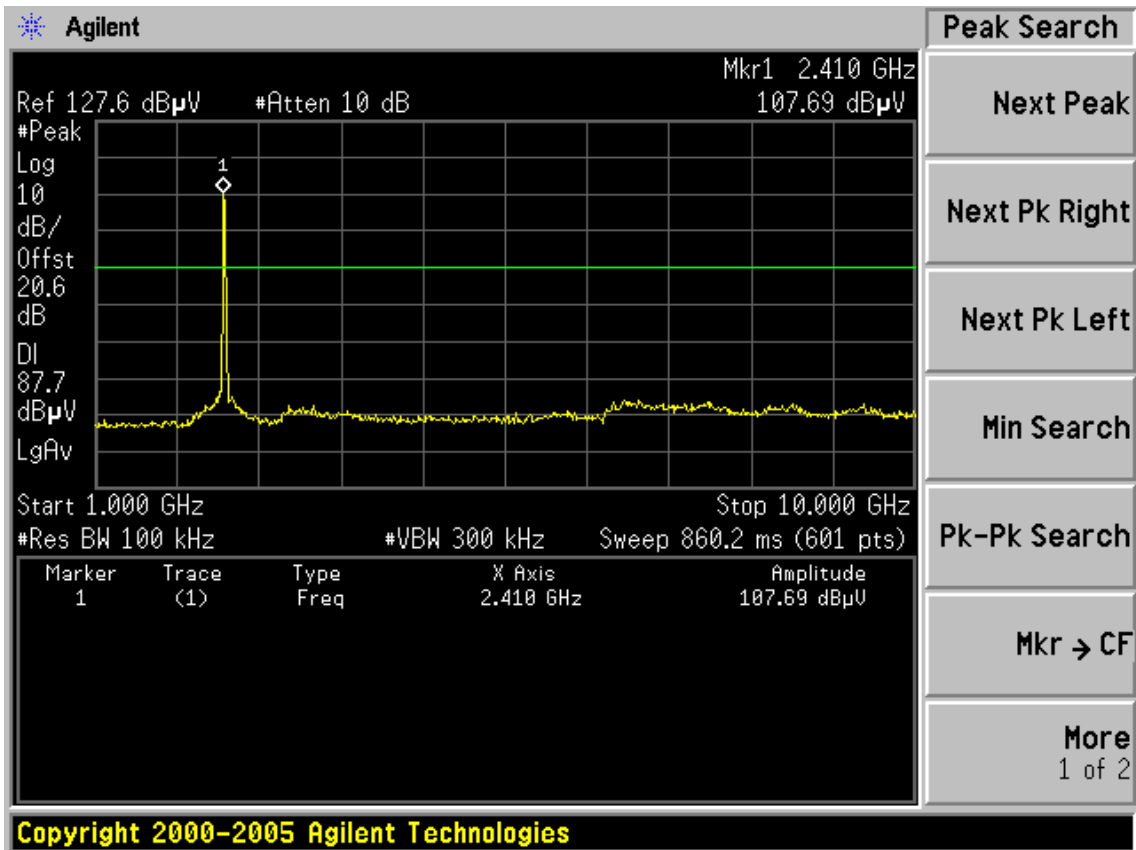


CH6

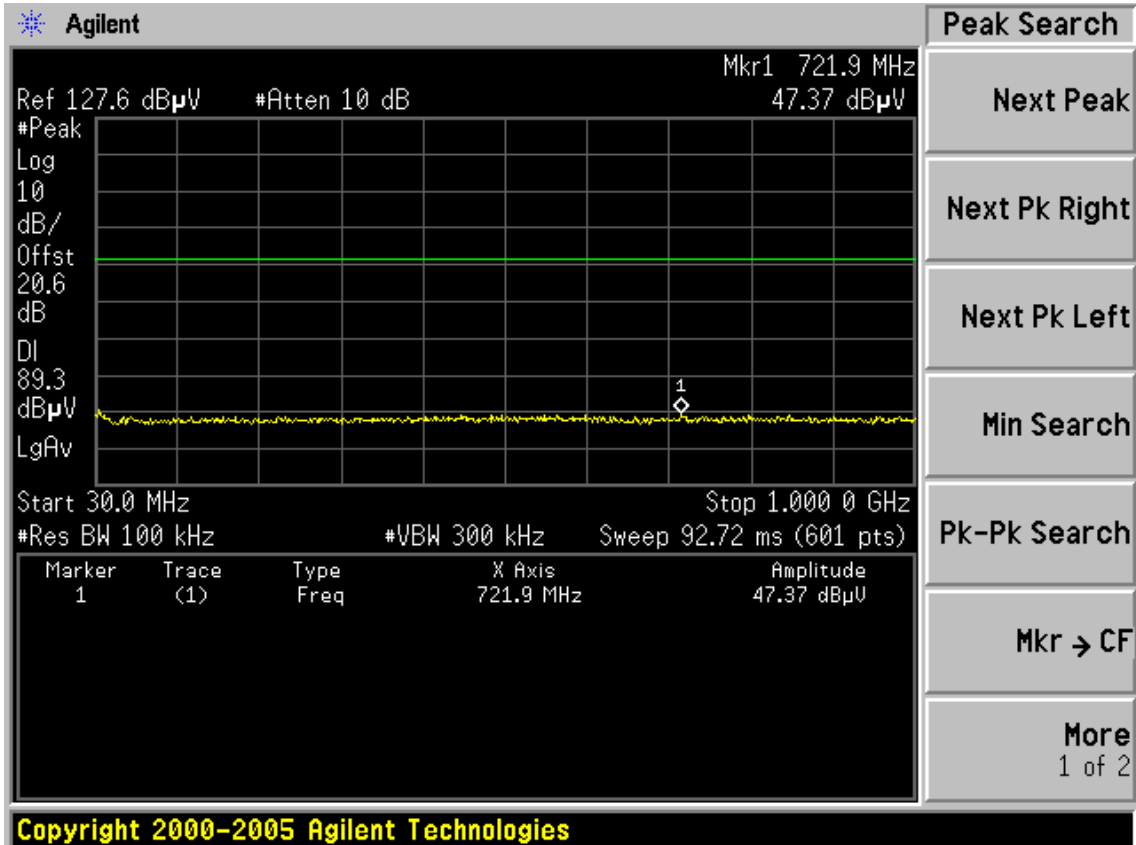


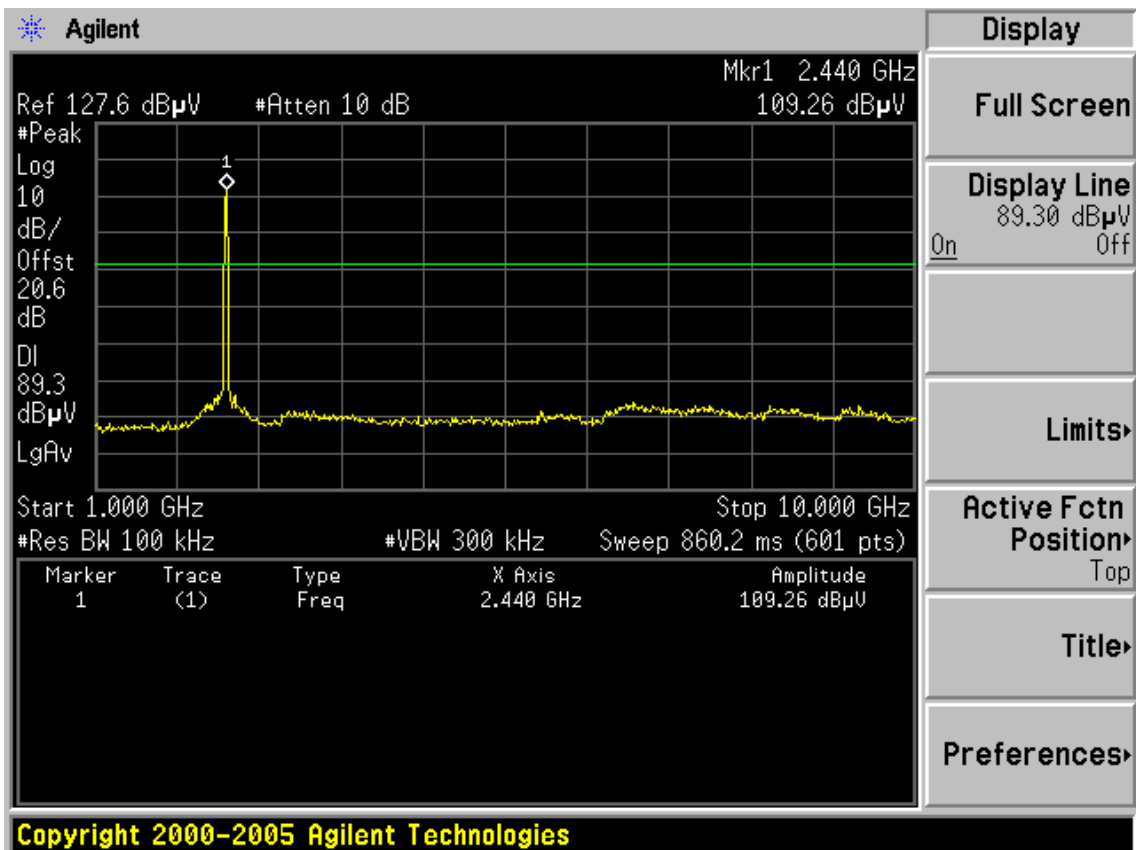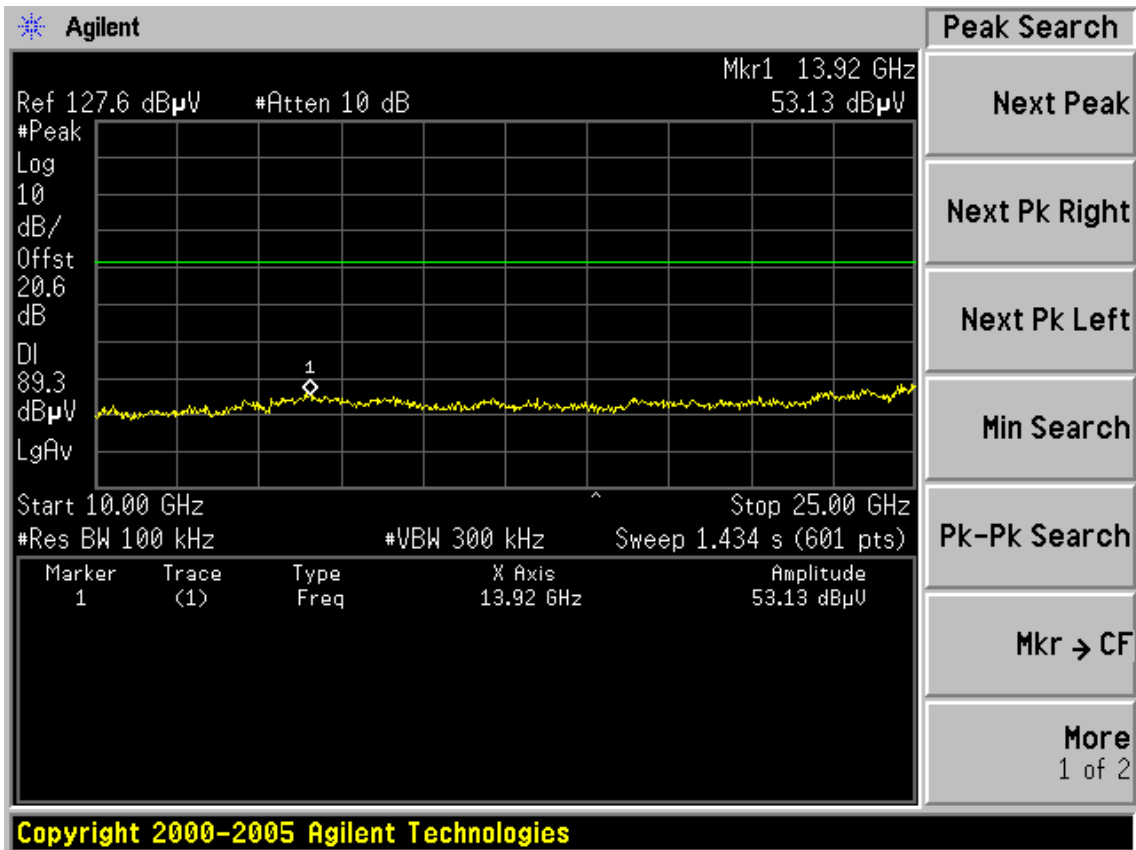

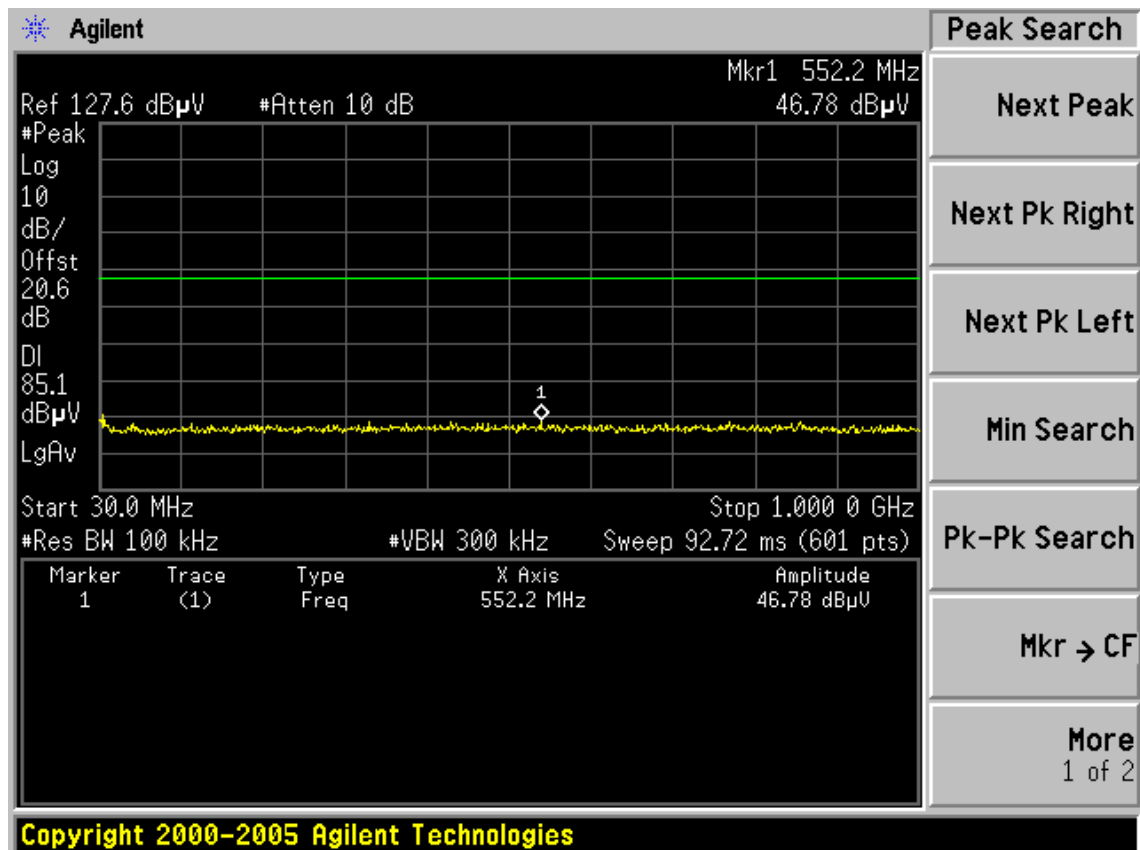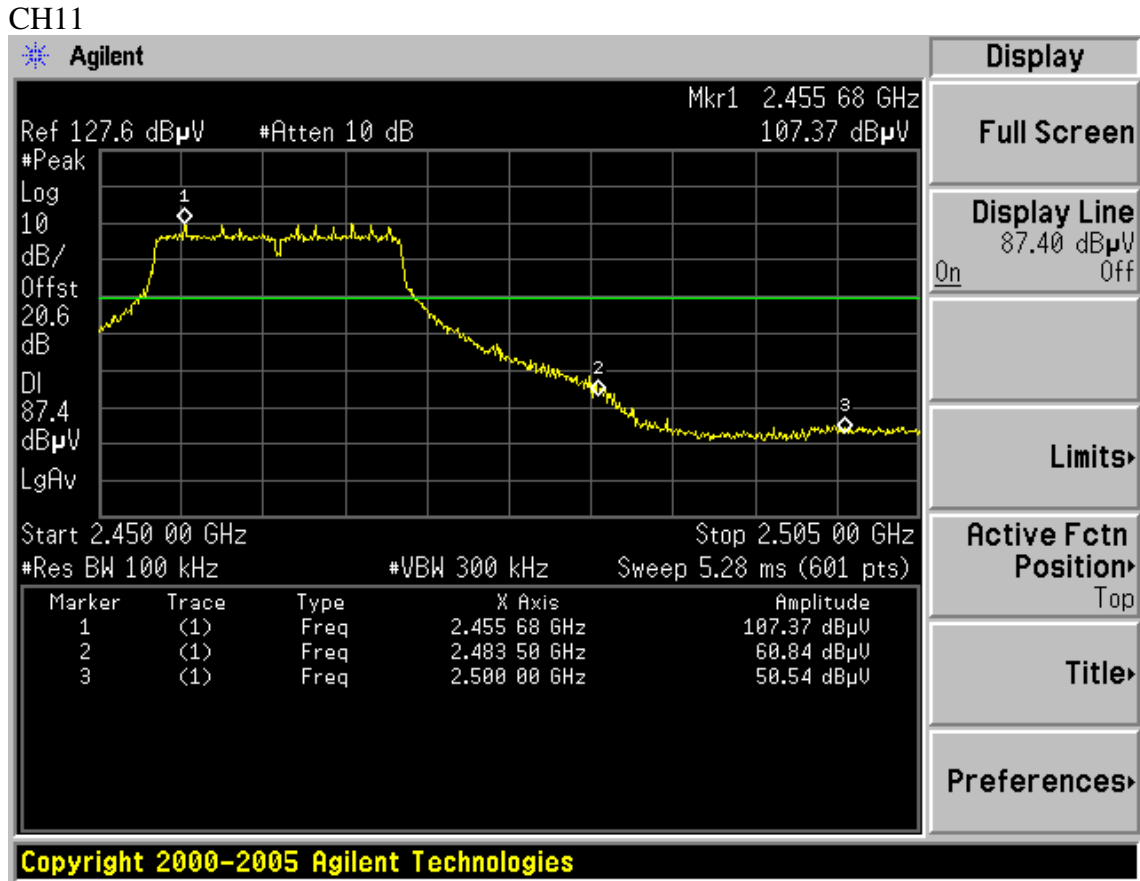


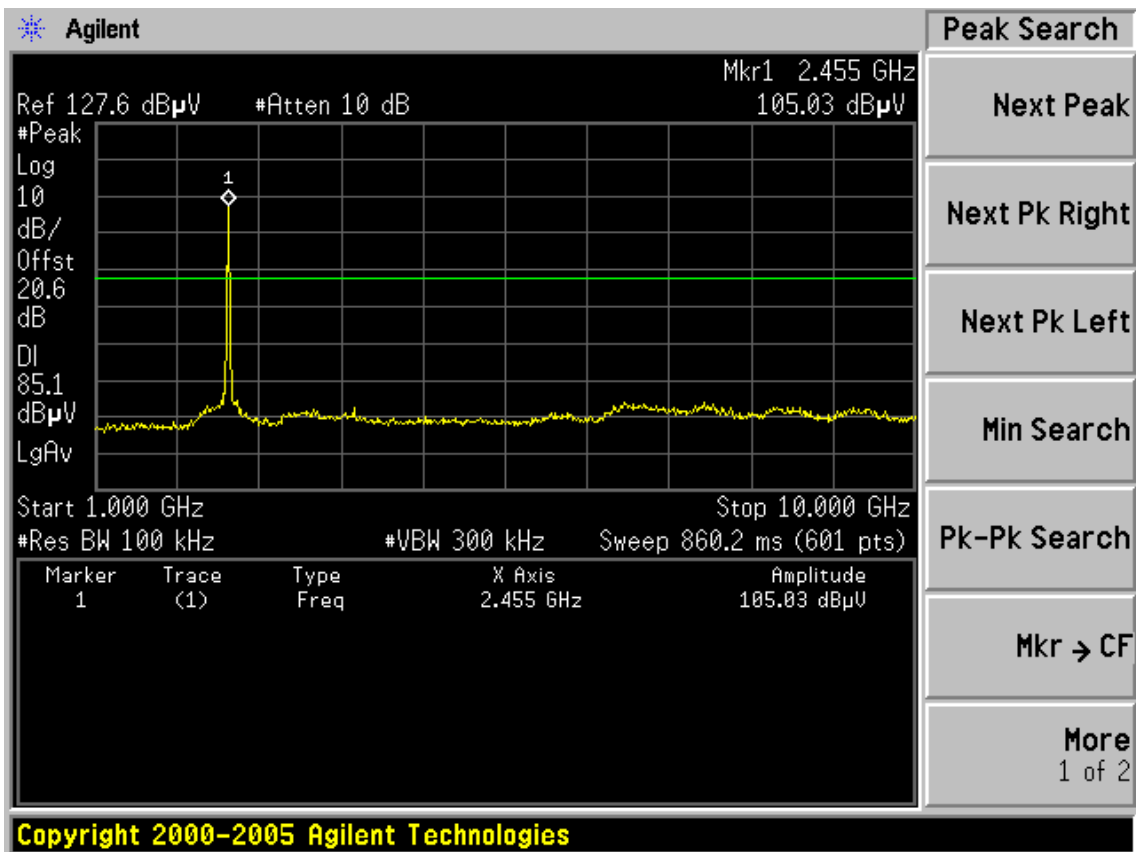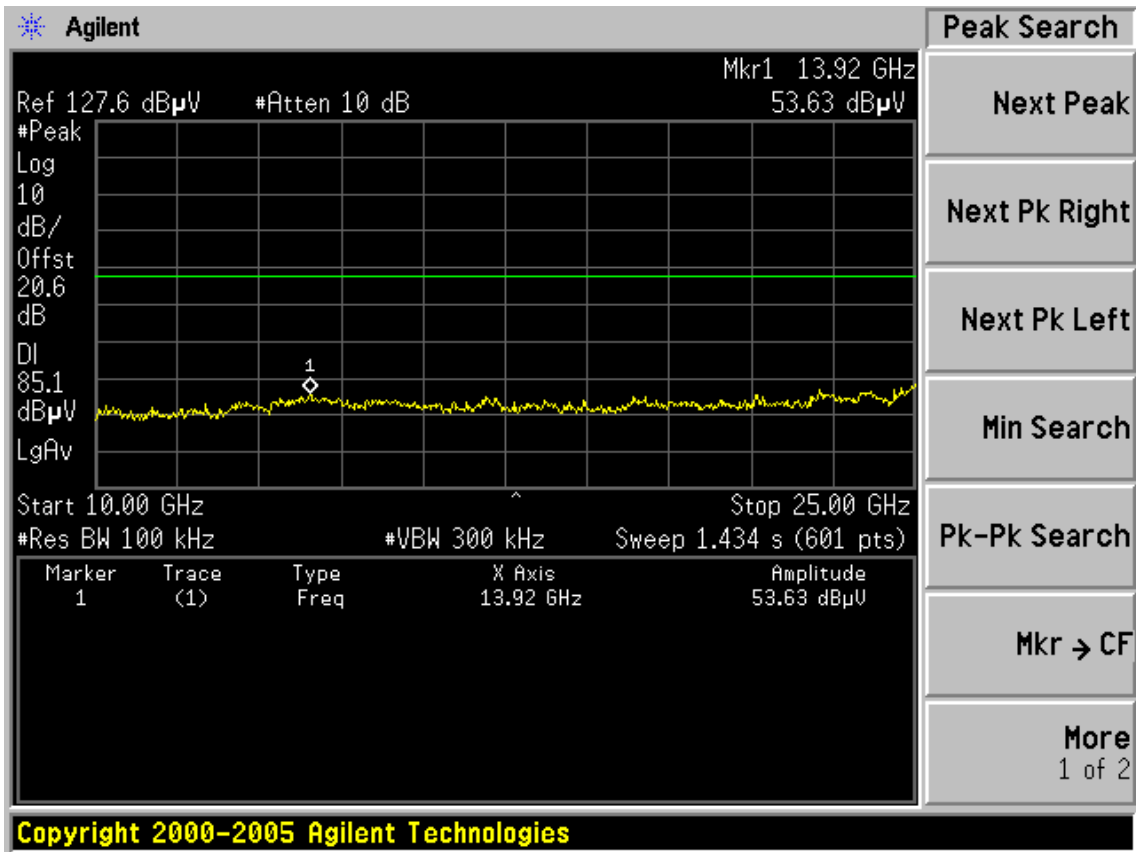



Test Mode: IEEE 802.11n HT20 TX
CH1

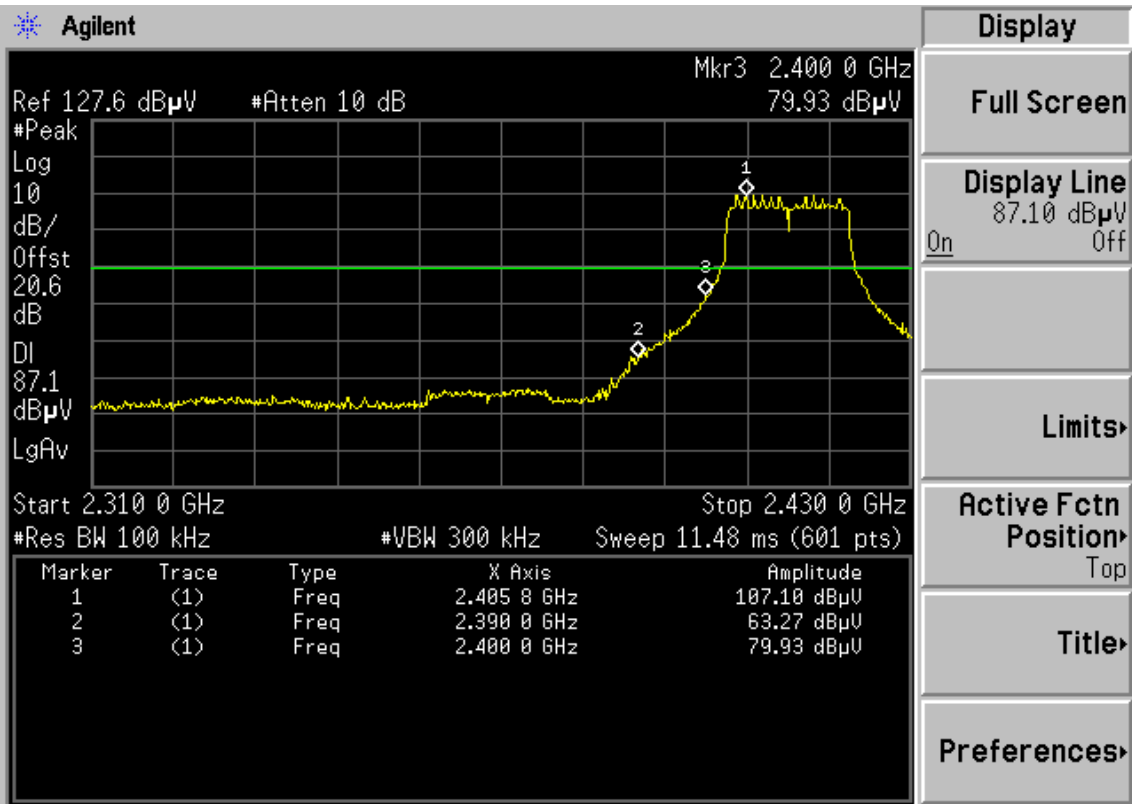



Copyright 2000-2005 Agilent Technologies

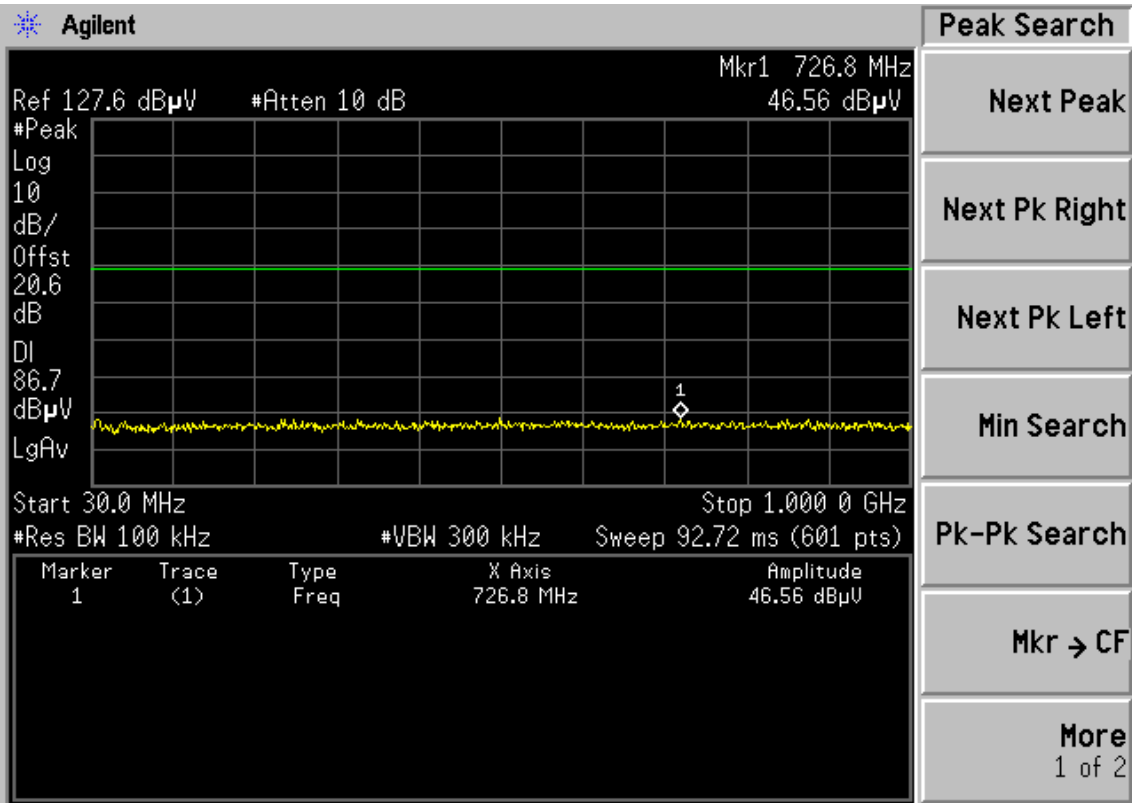


Copyright 2000-2005 Agilent Technologies

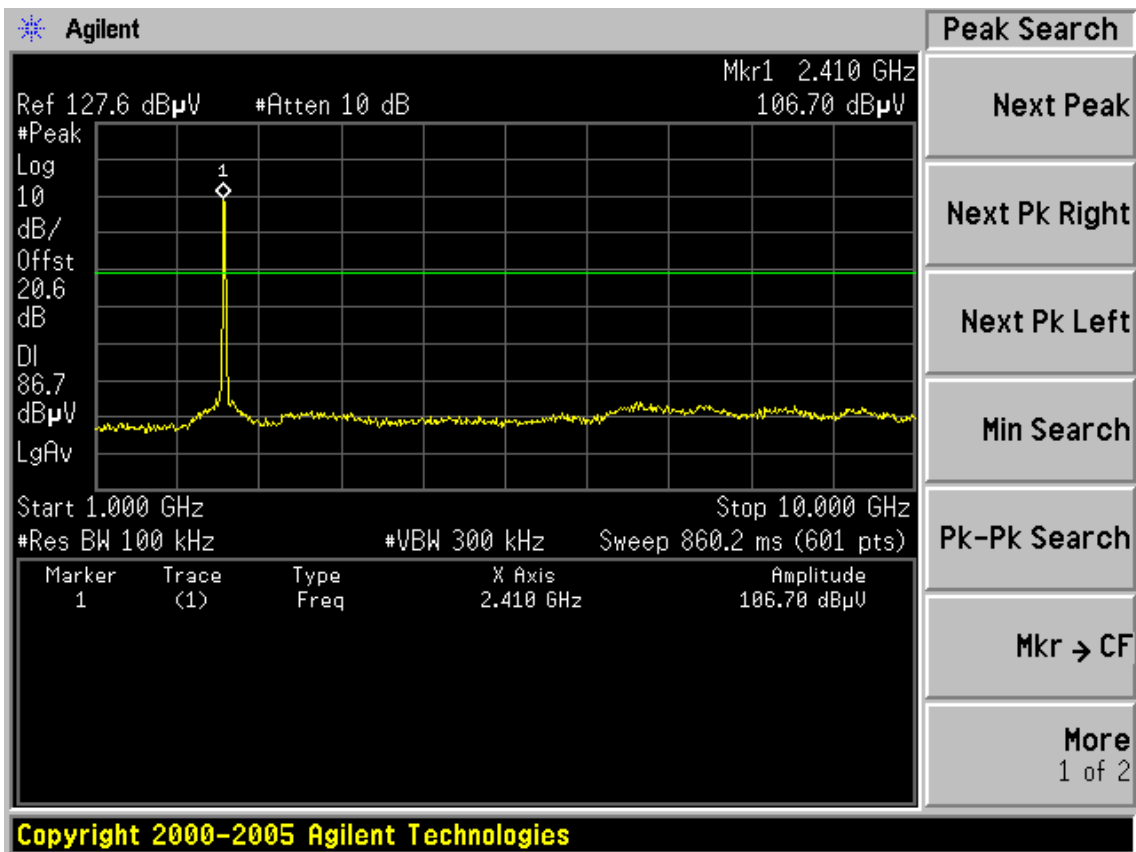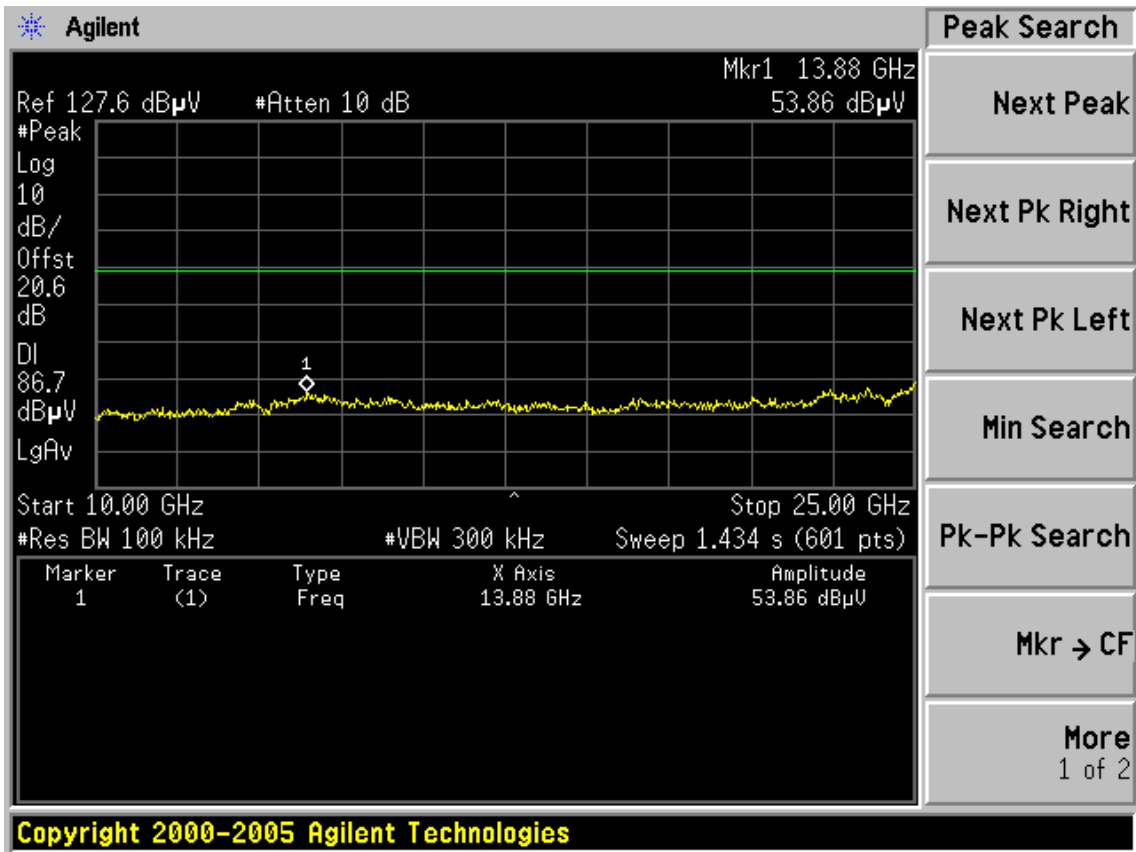




CH6

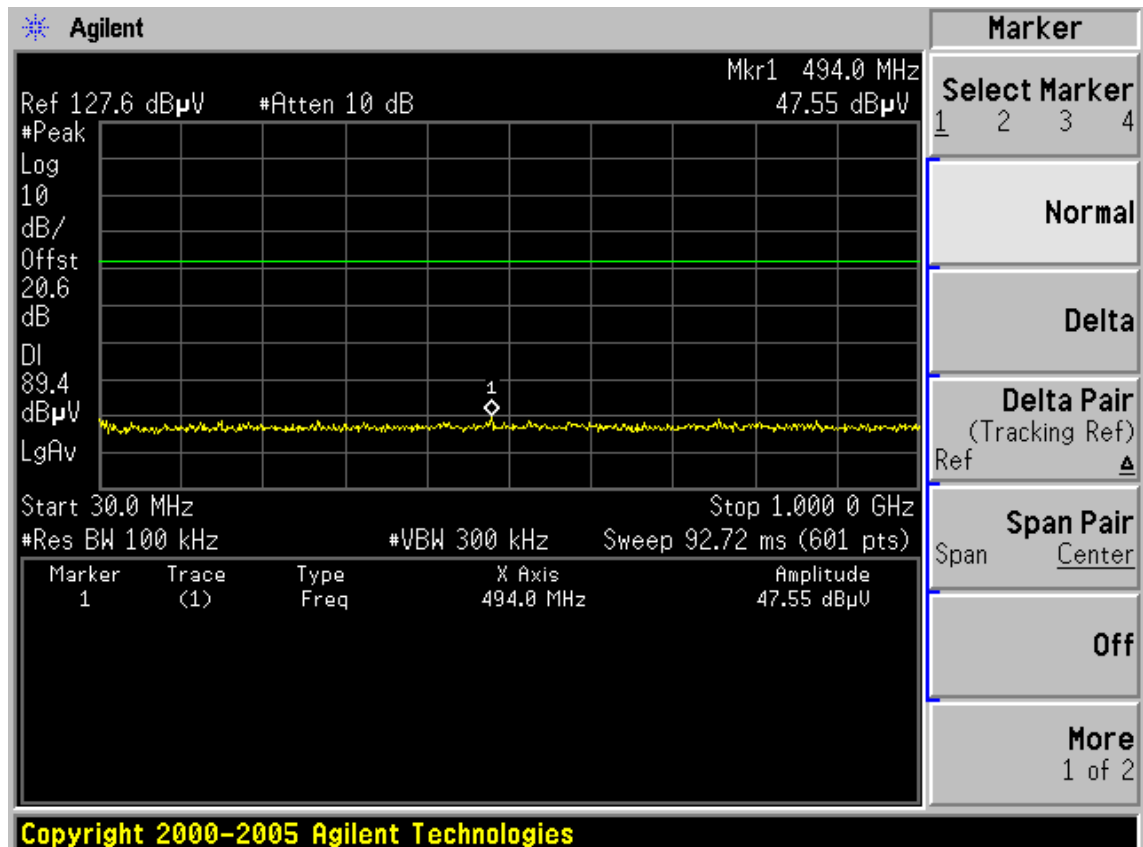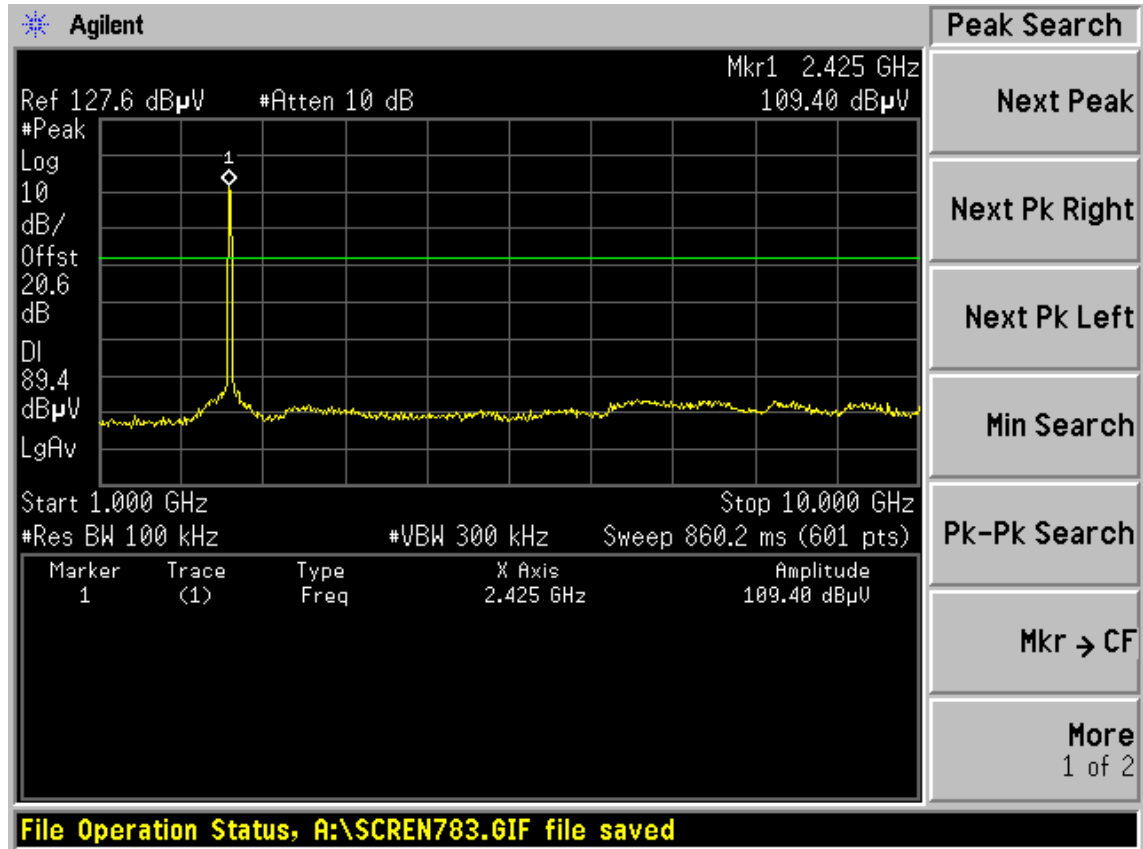


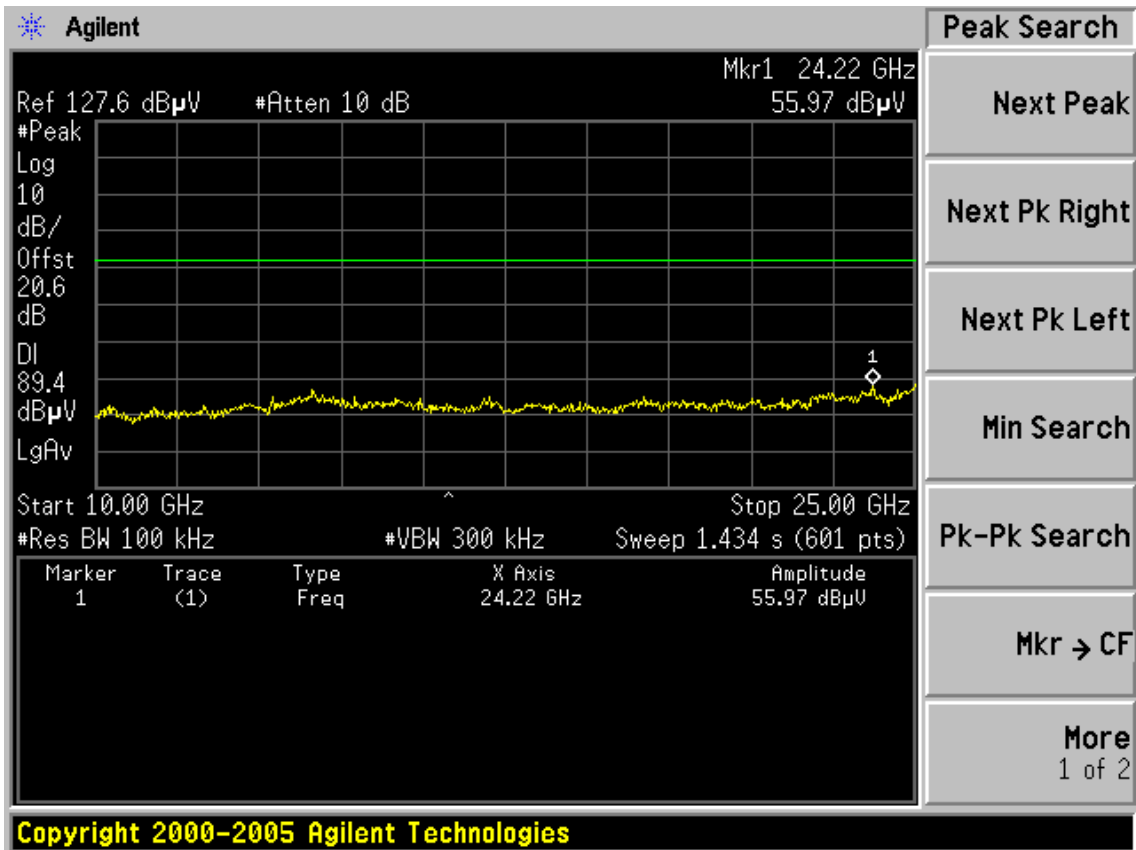

CH11

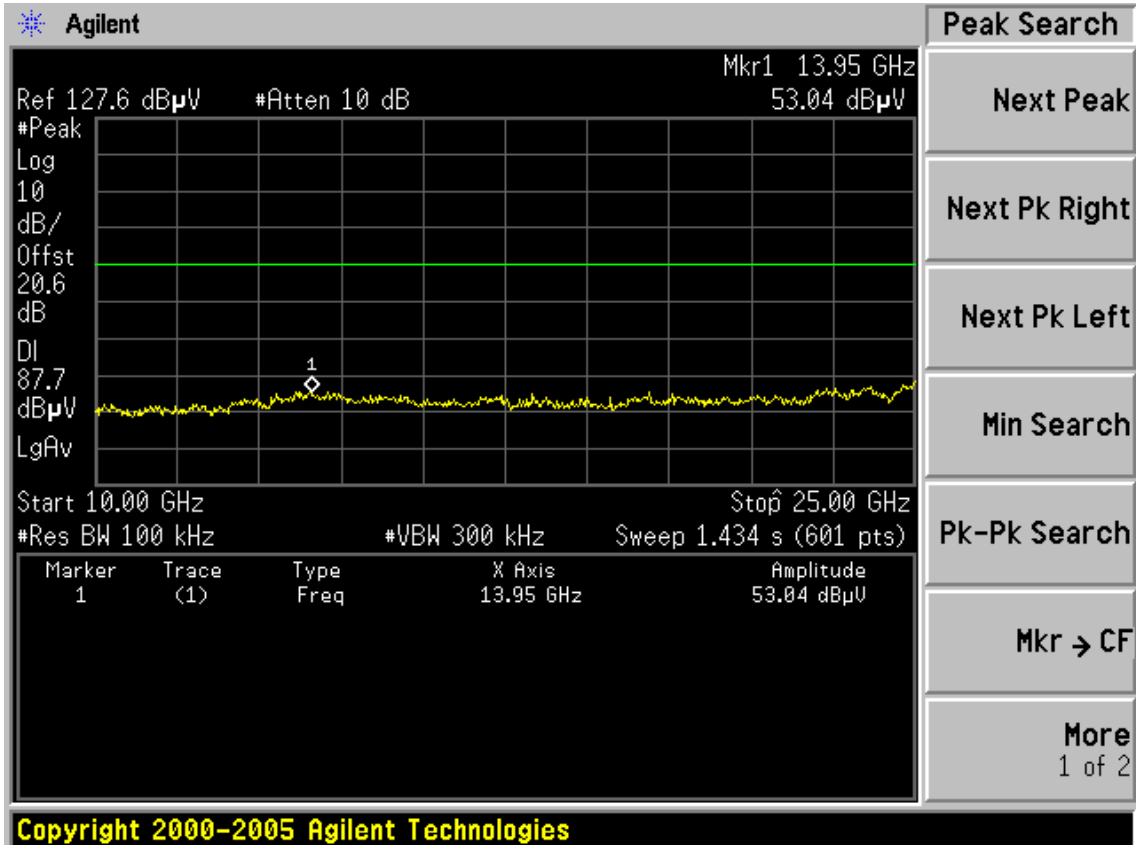


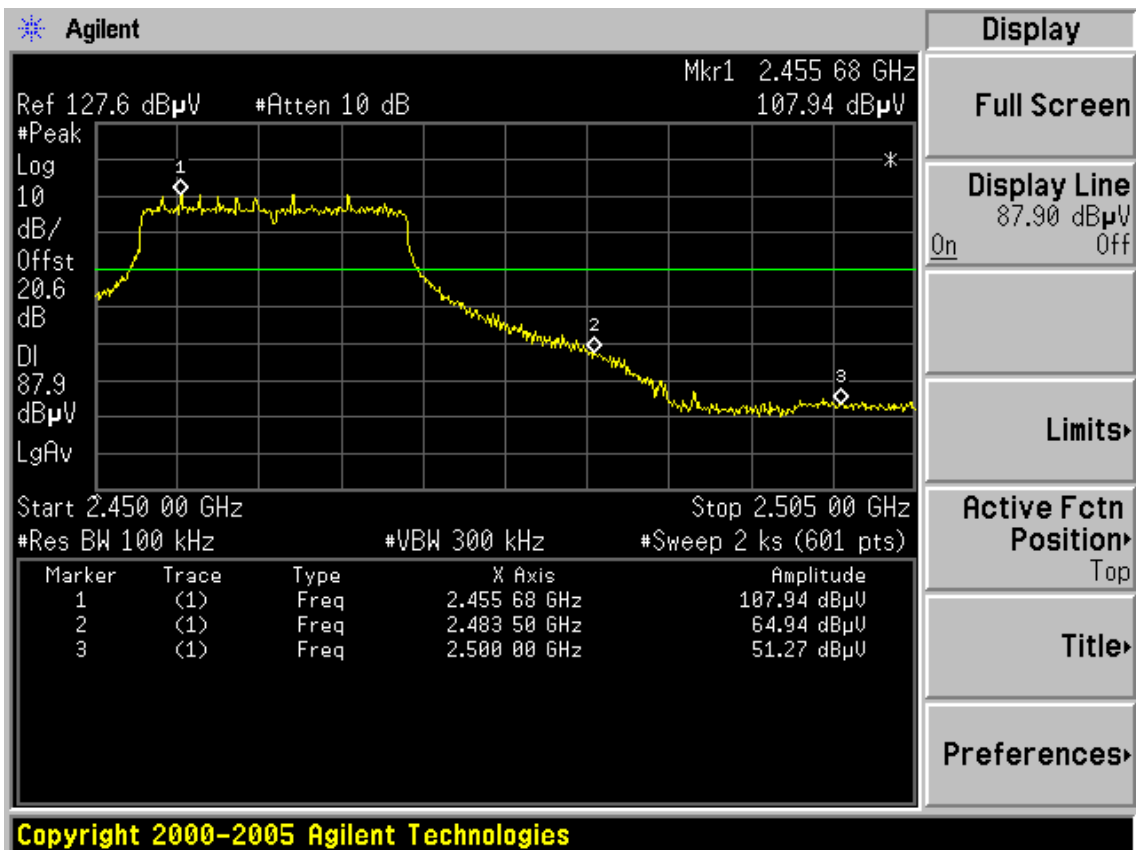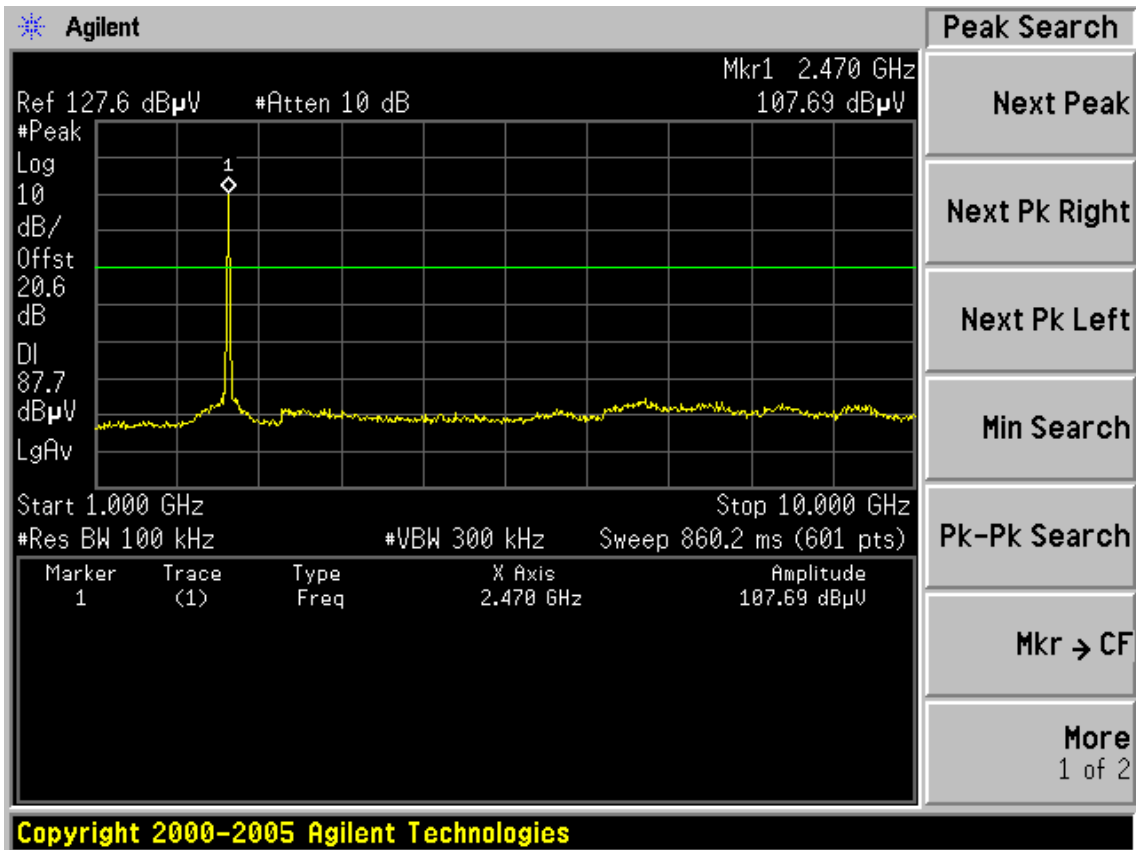


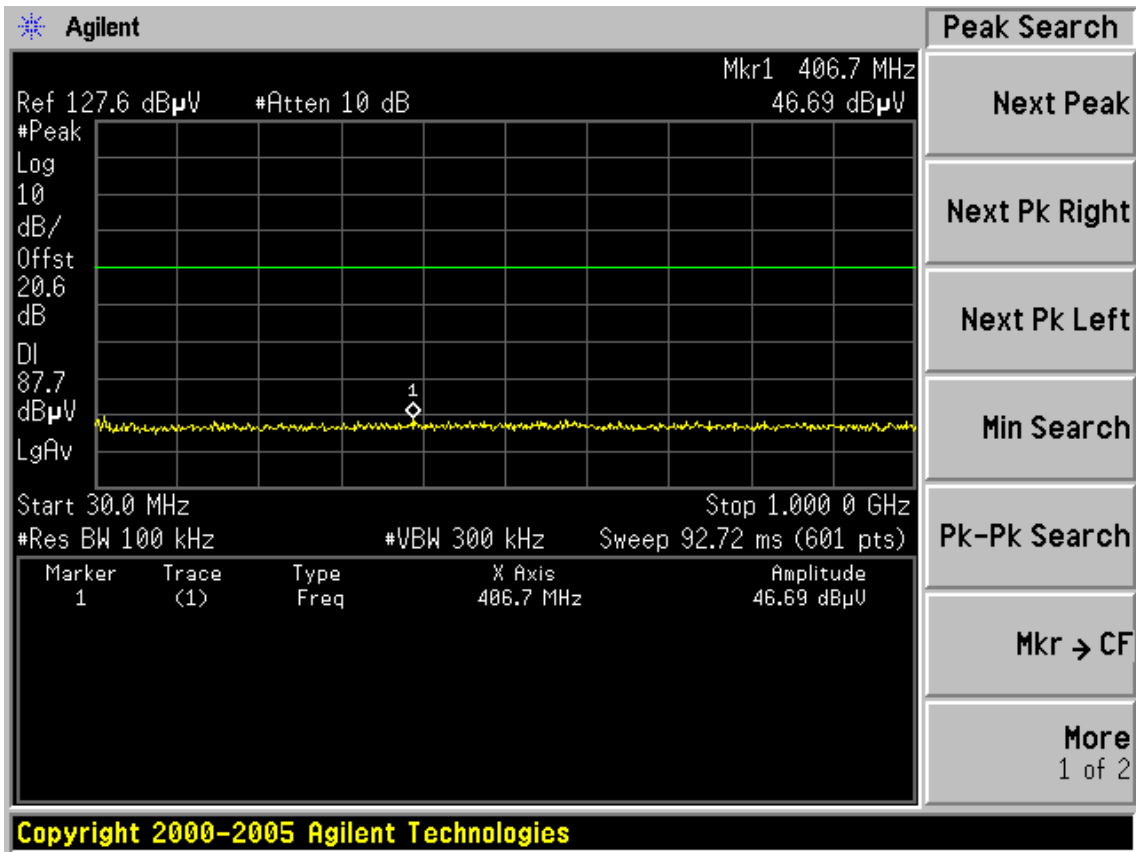


Test Mode: IEEE 802.11n HT40TX

CH1

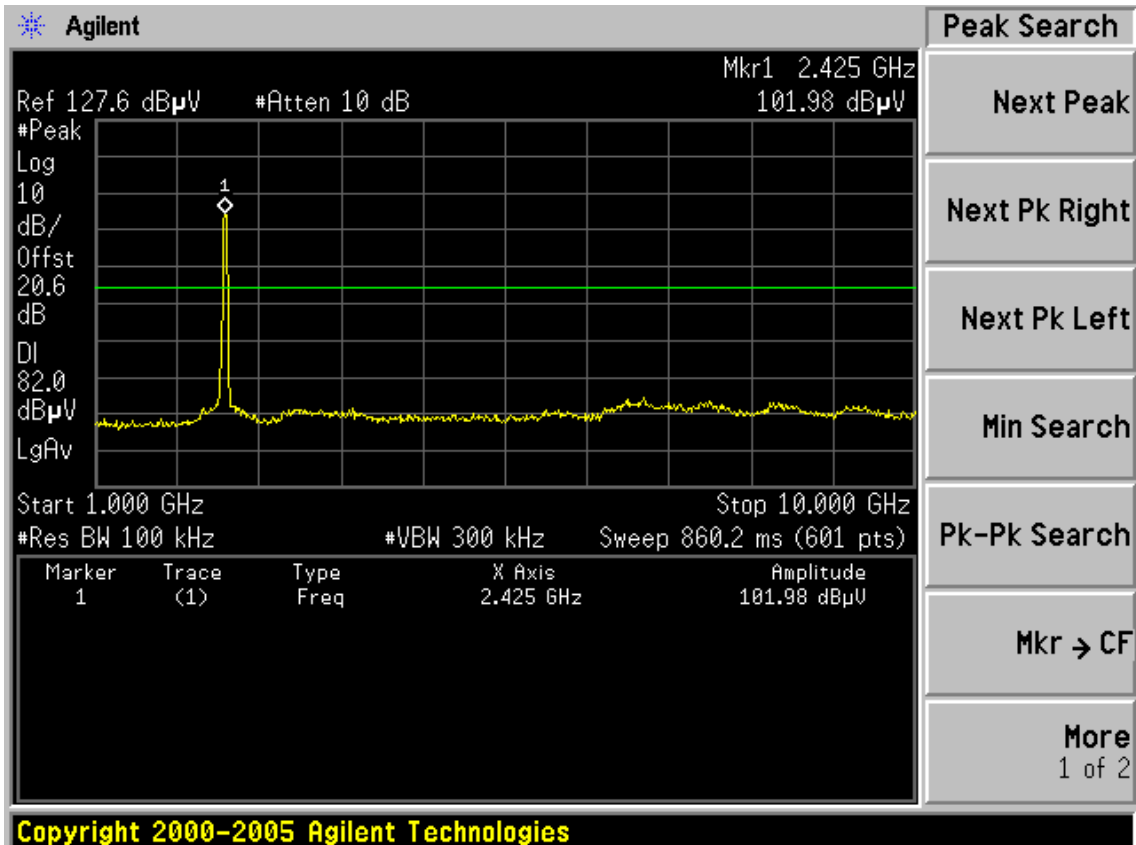


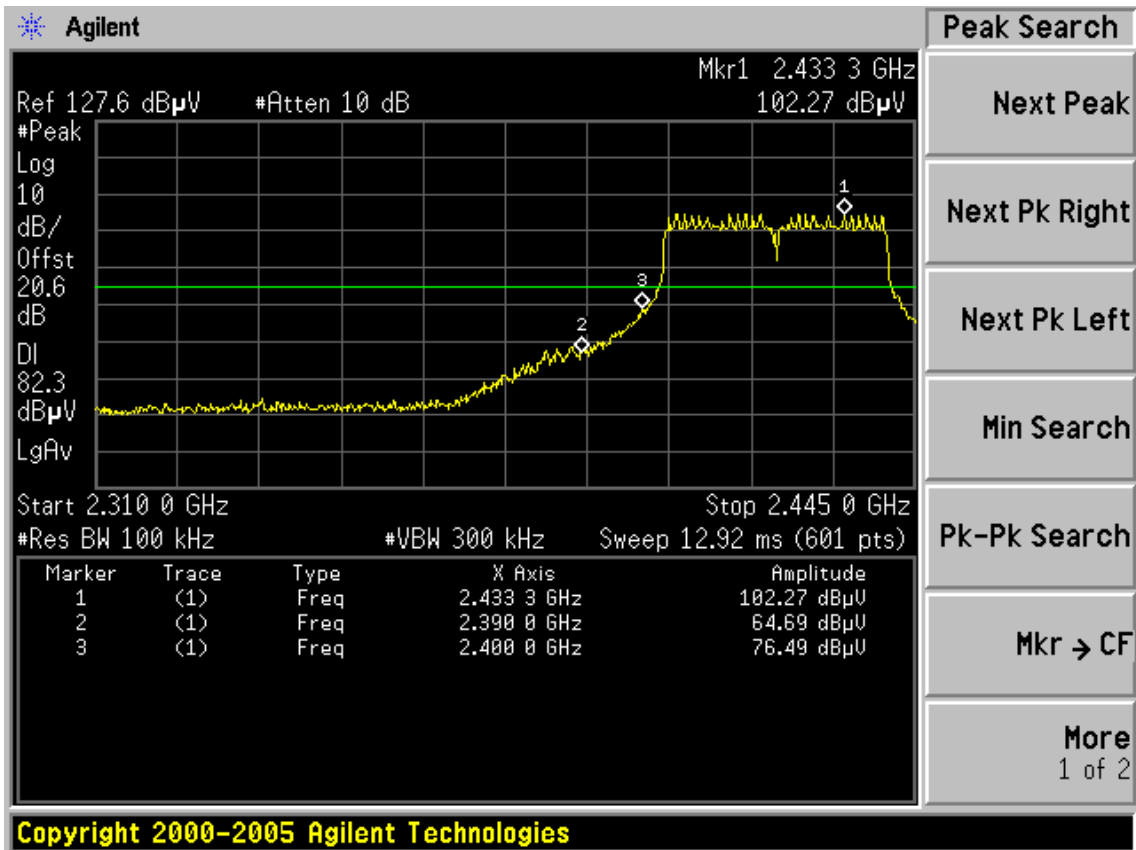


Copyright 2000-2005 Agilent Technologies


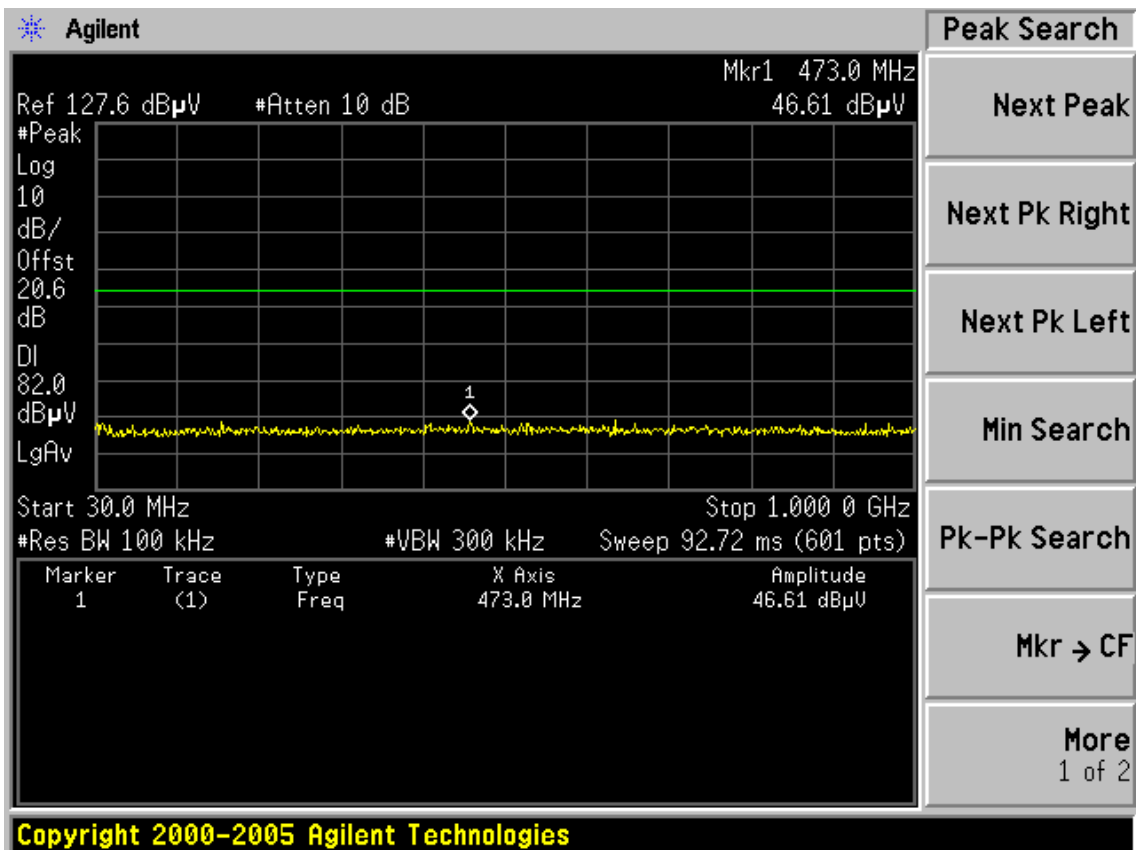




Copyright 2000-2005 Agilent Technologies


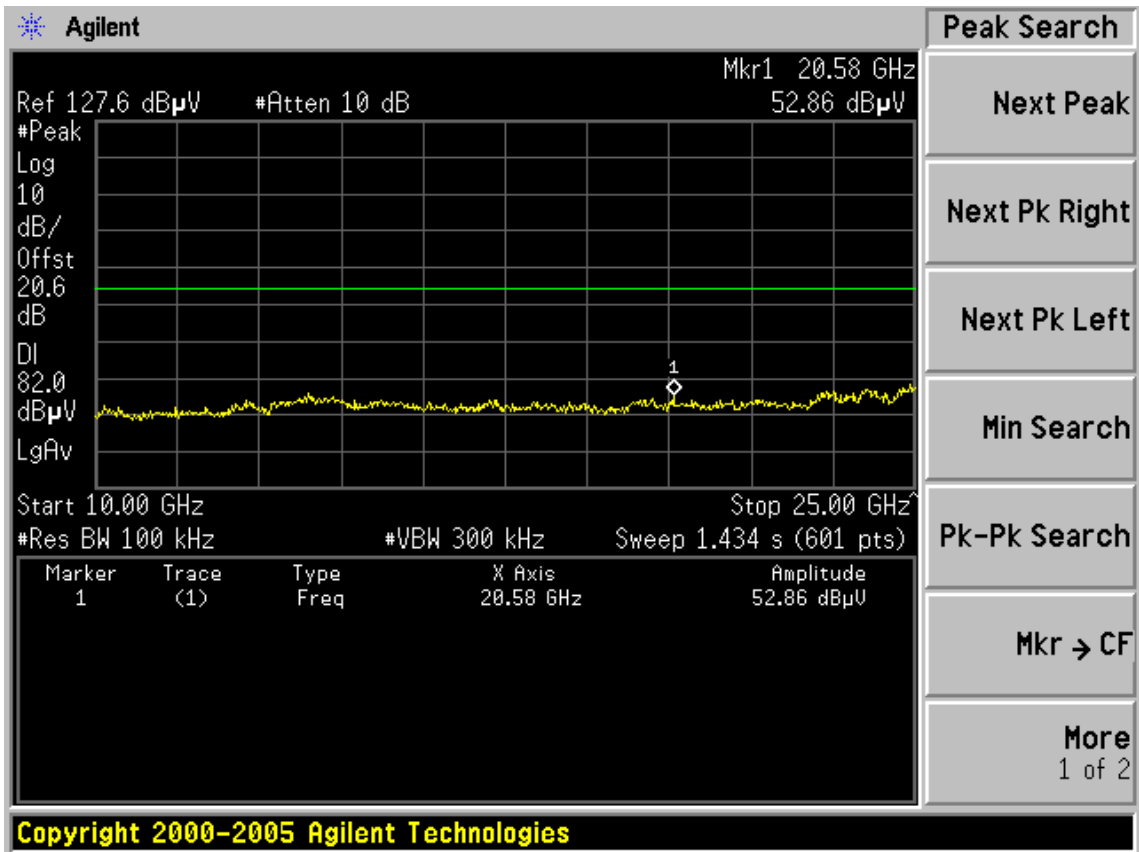


CH4

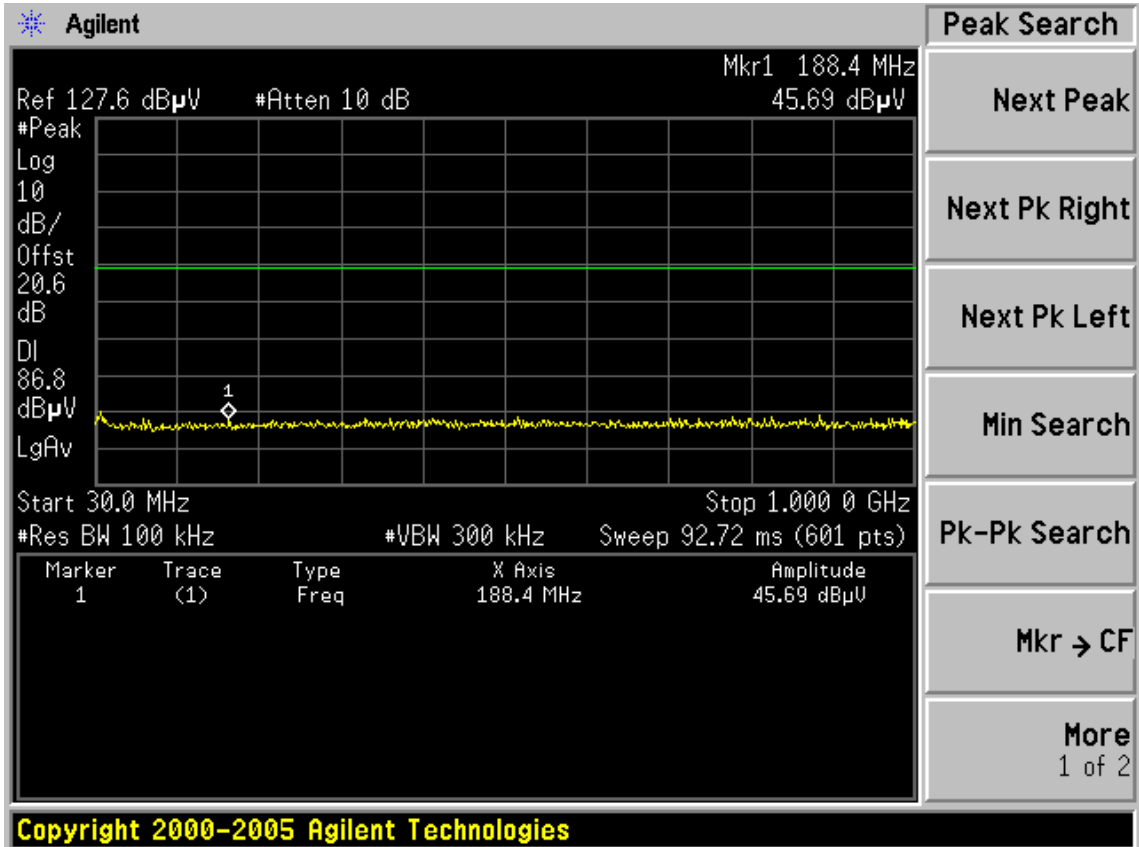

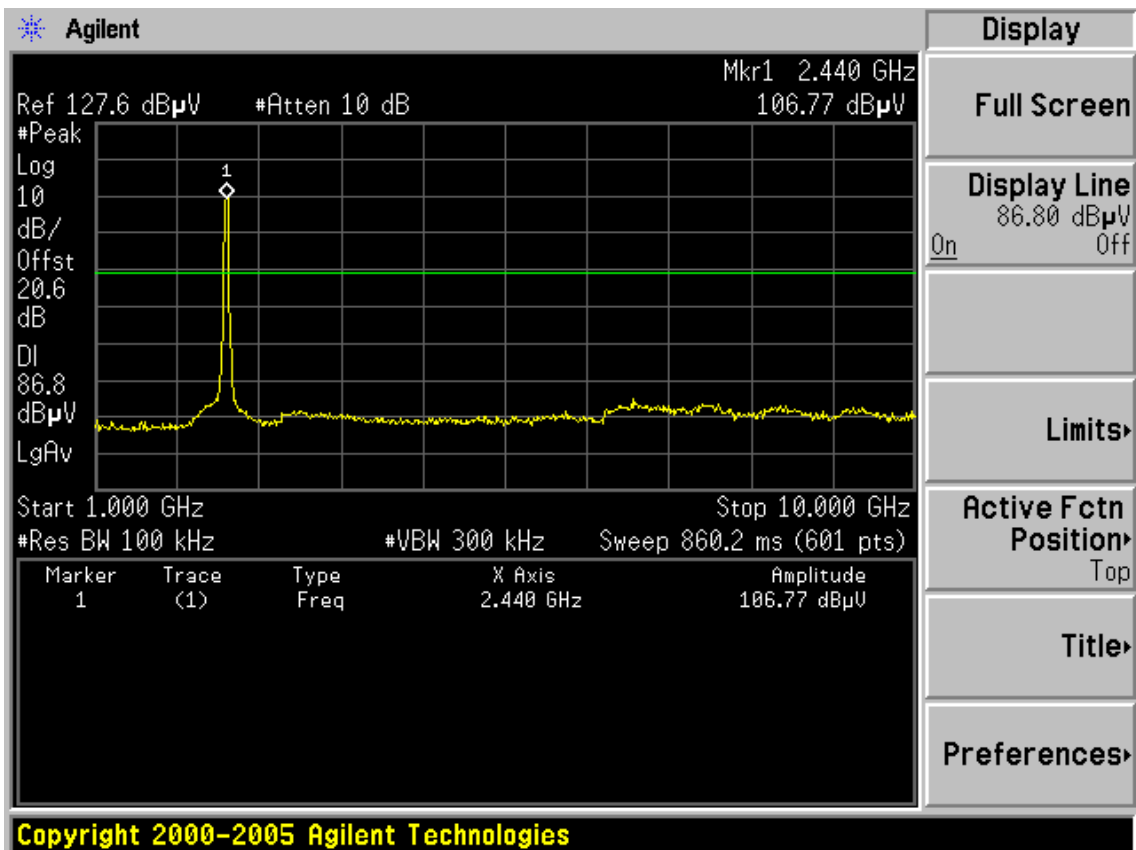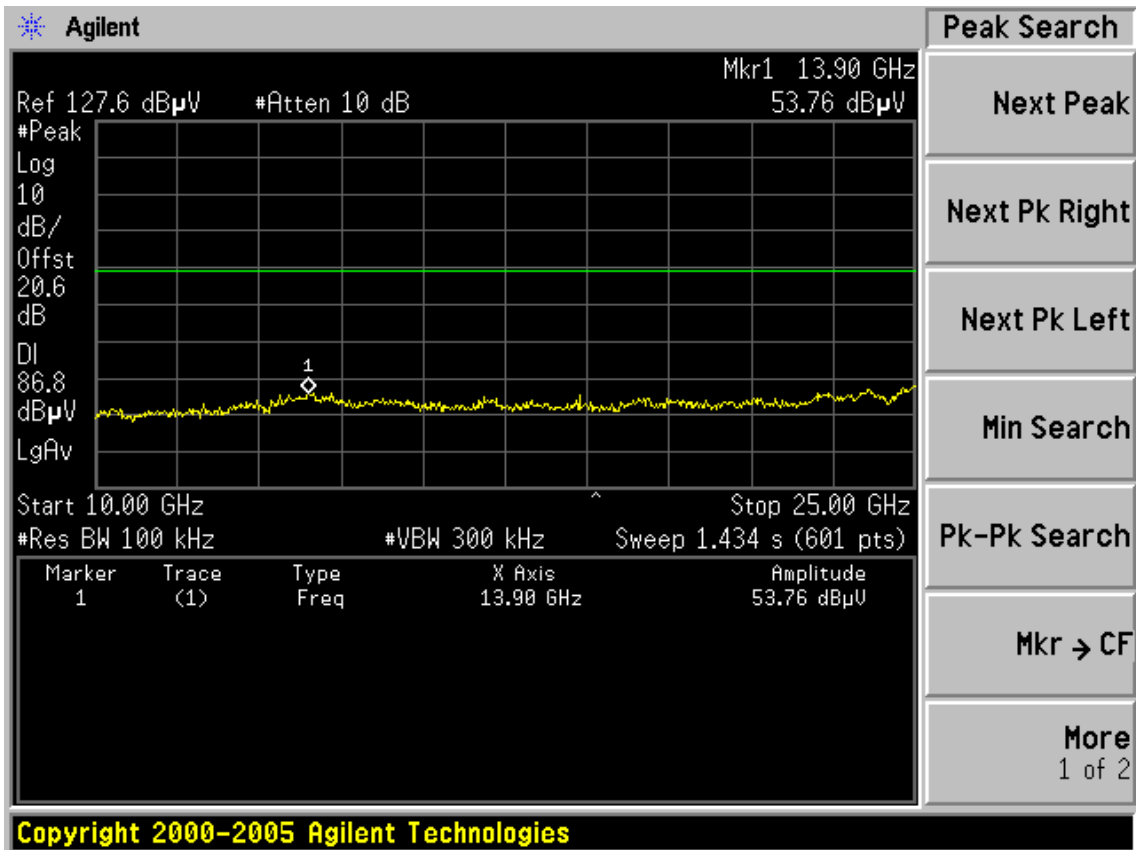

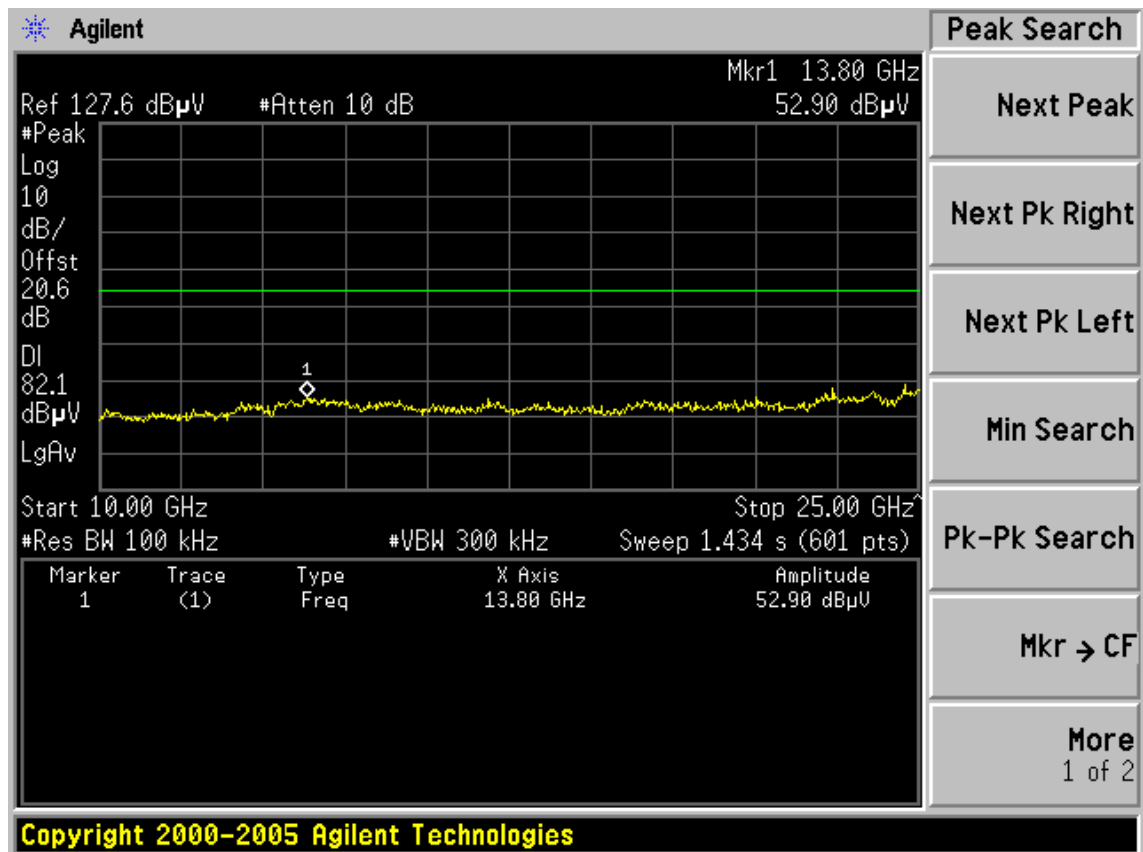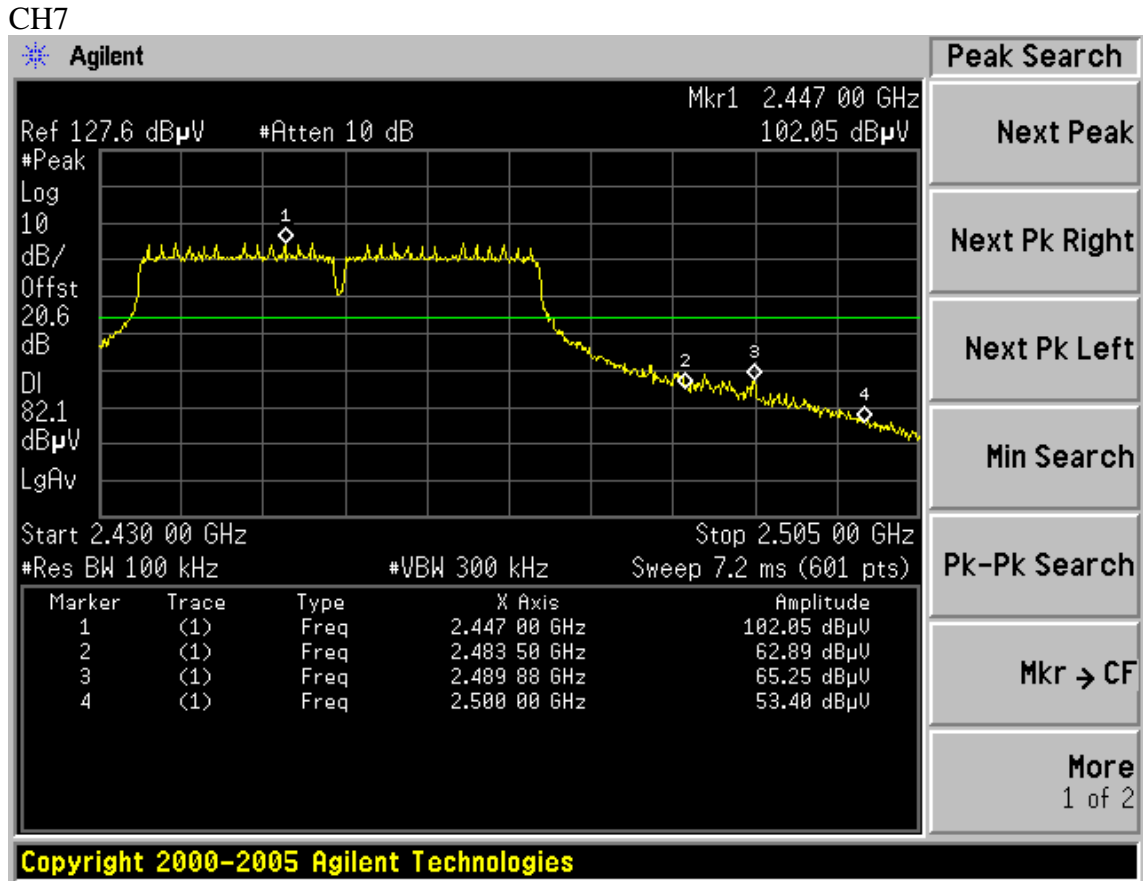


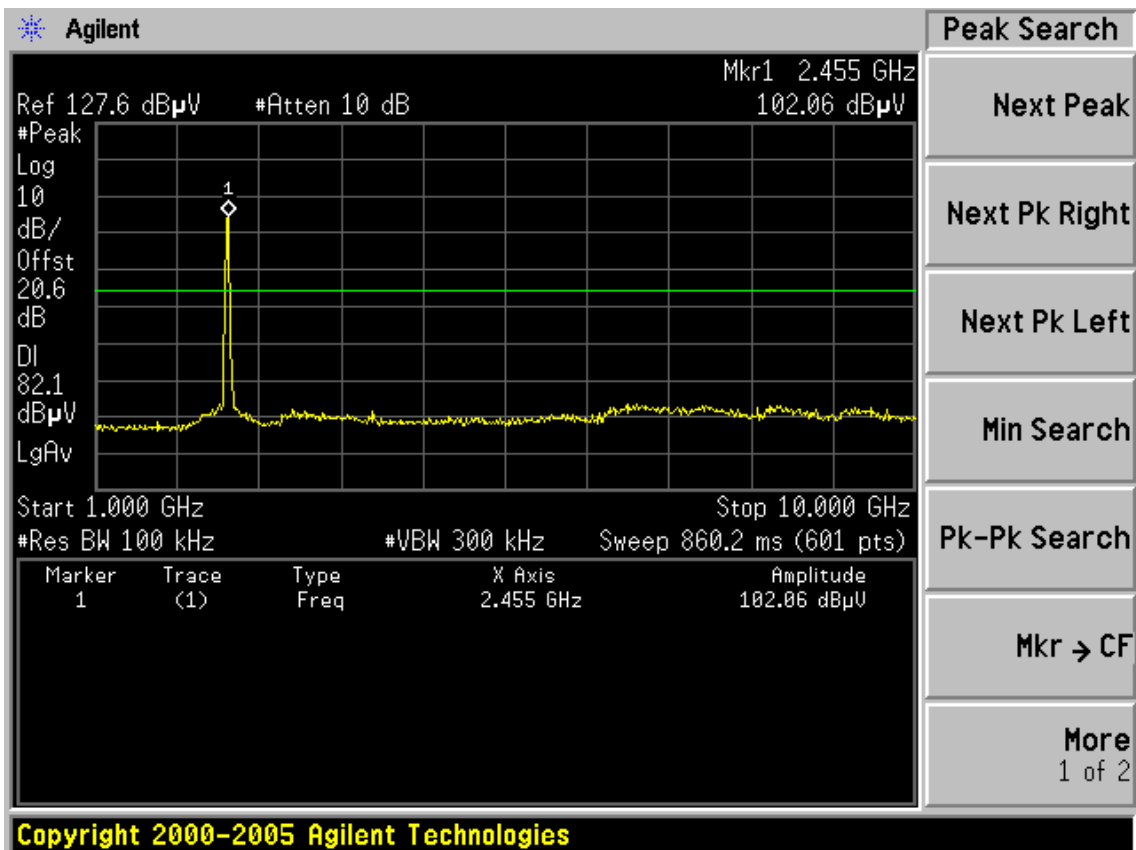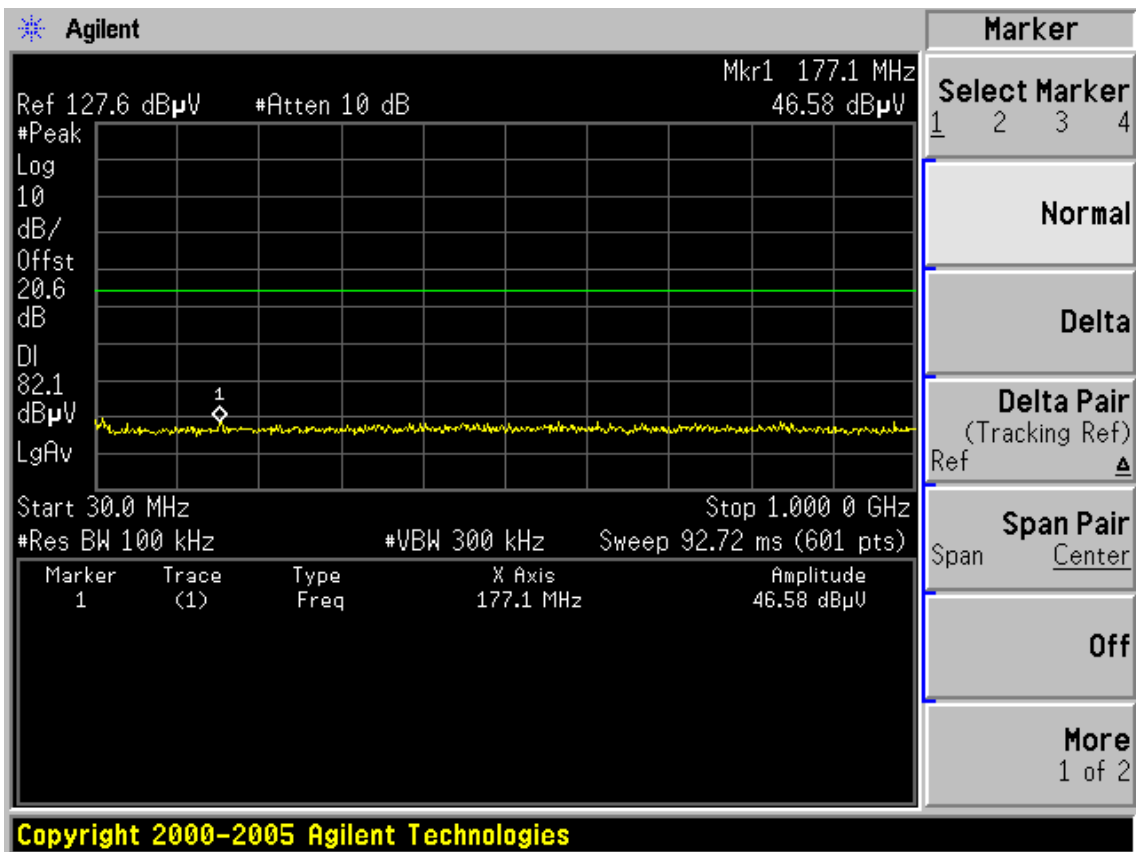


FCC ID: YZKSMCWBR14N5

page



Chain1
 Test Mode: IEEE 802.11bTX
 CH1


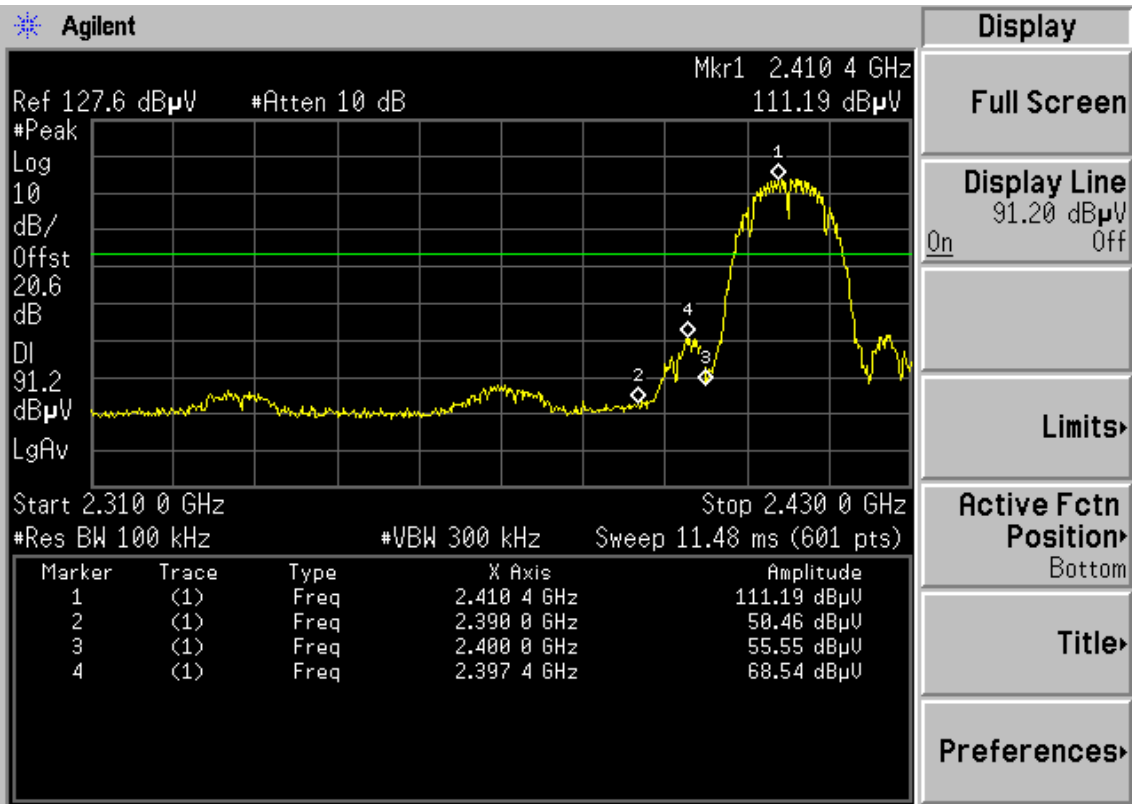



Copyright 2000-2005 Agilent Technologies

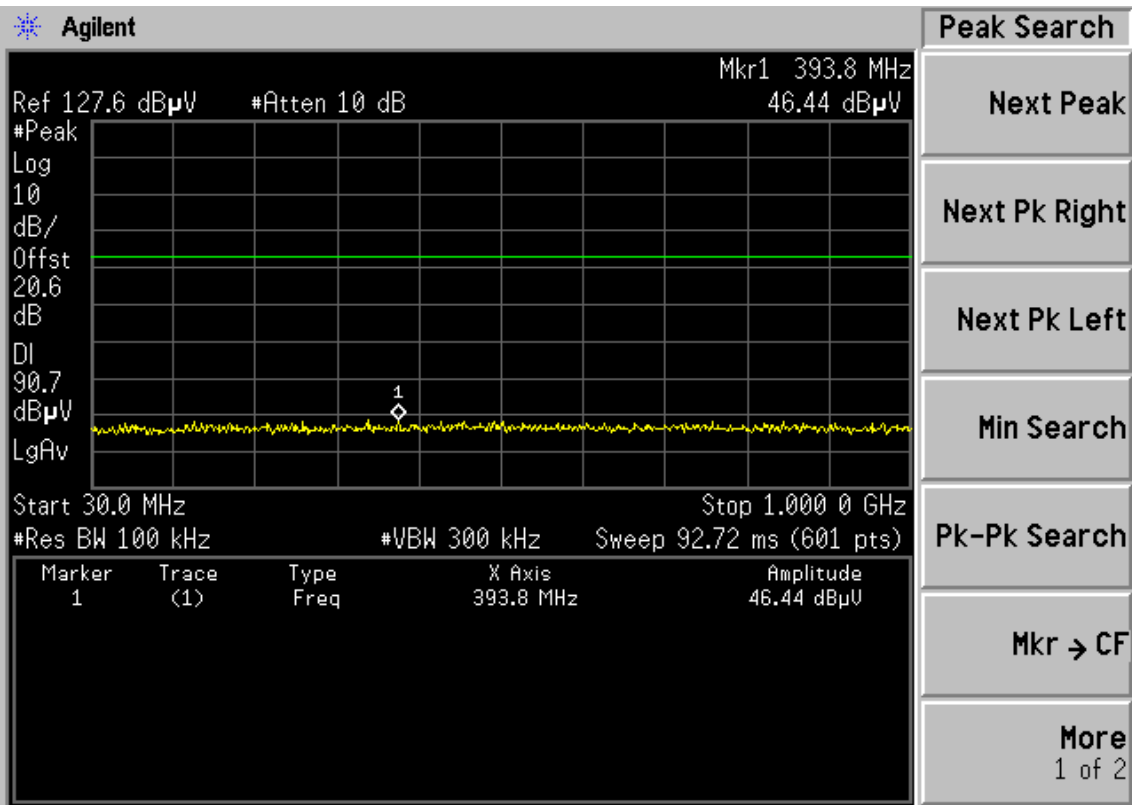


Copyright 2000-2005 Agilent Technologies

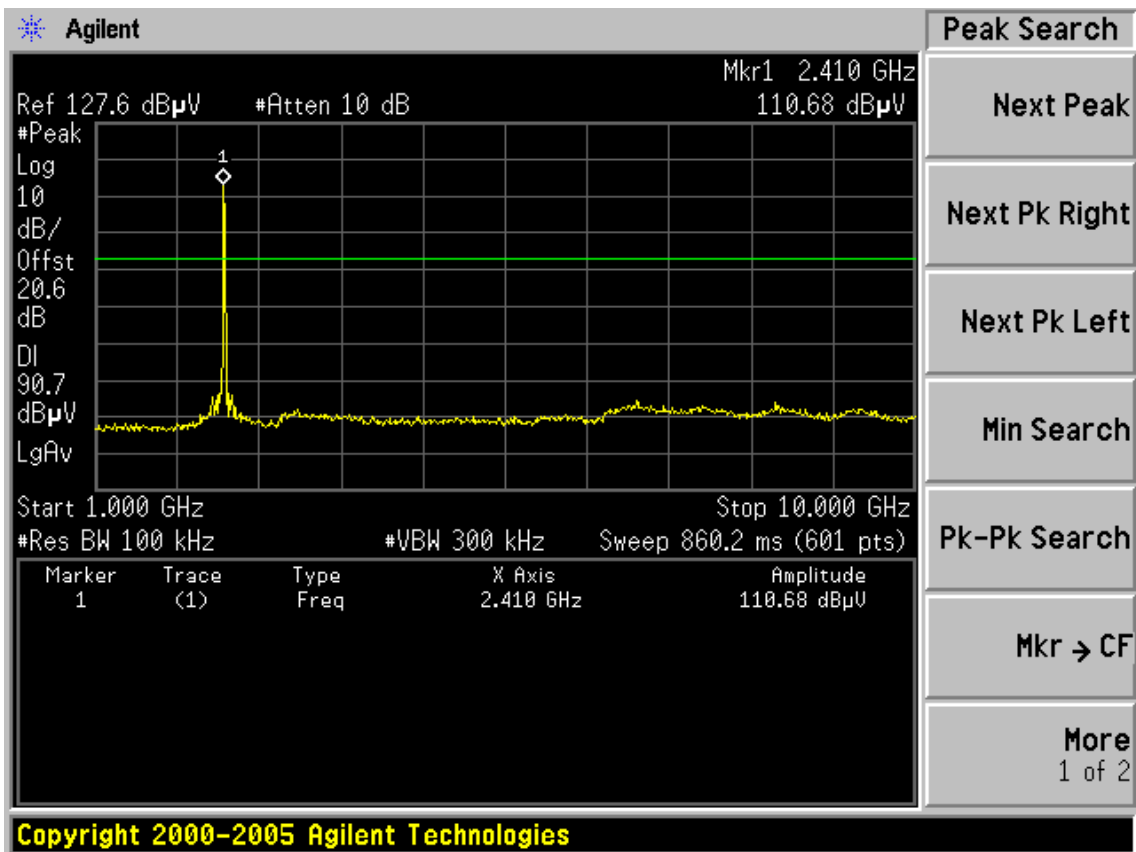
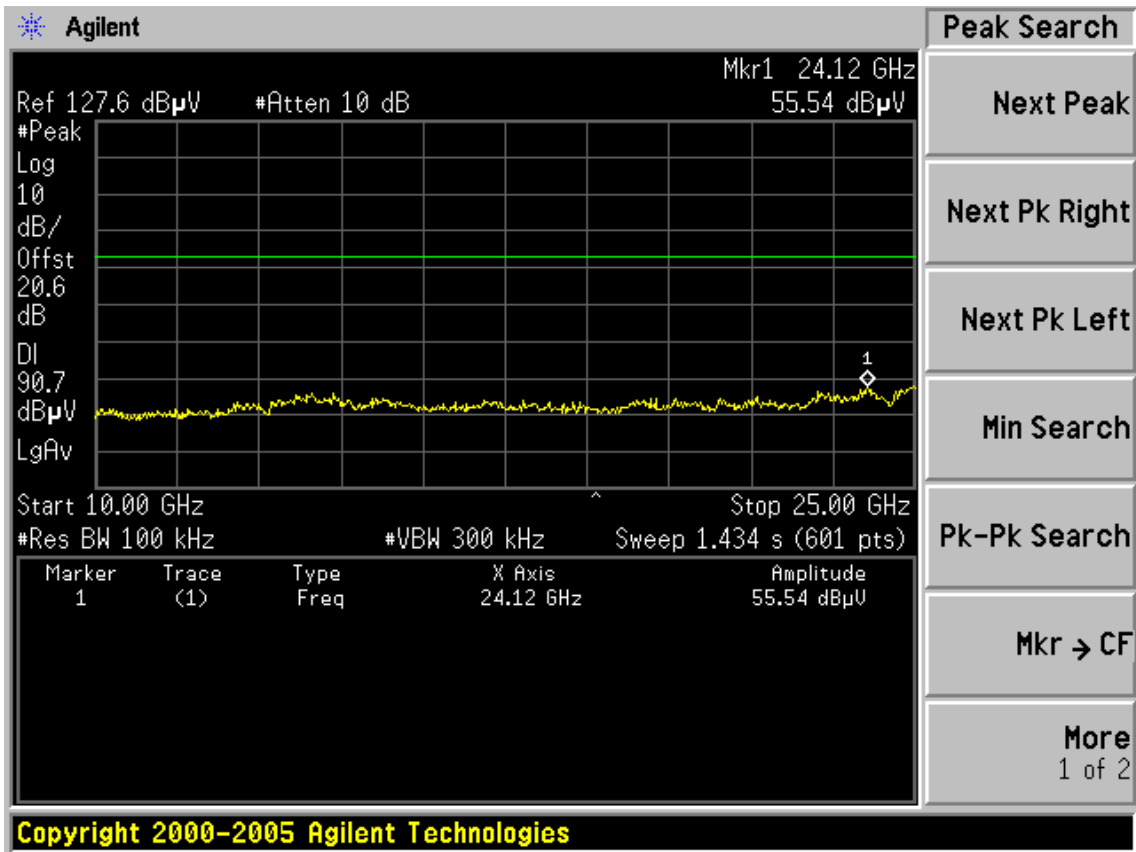


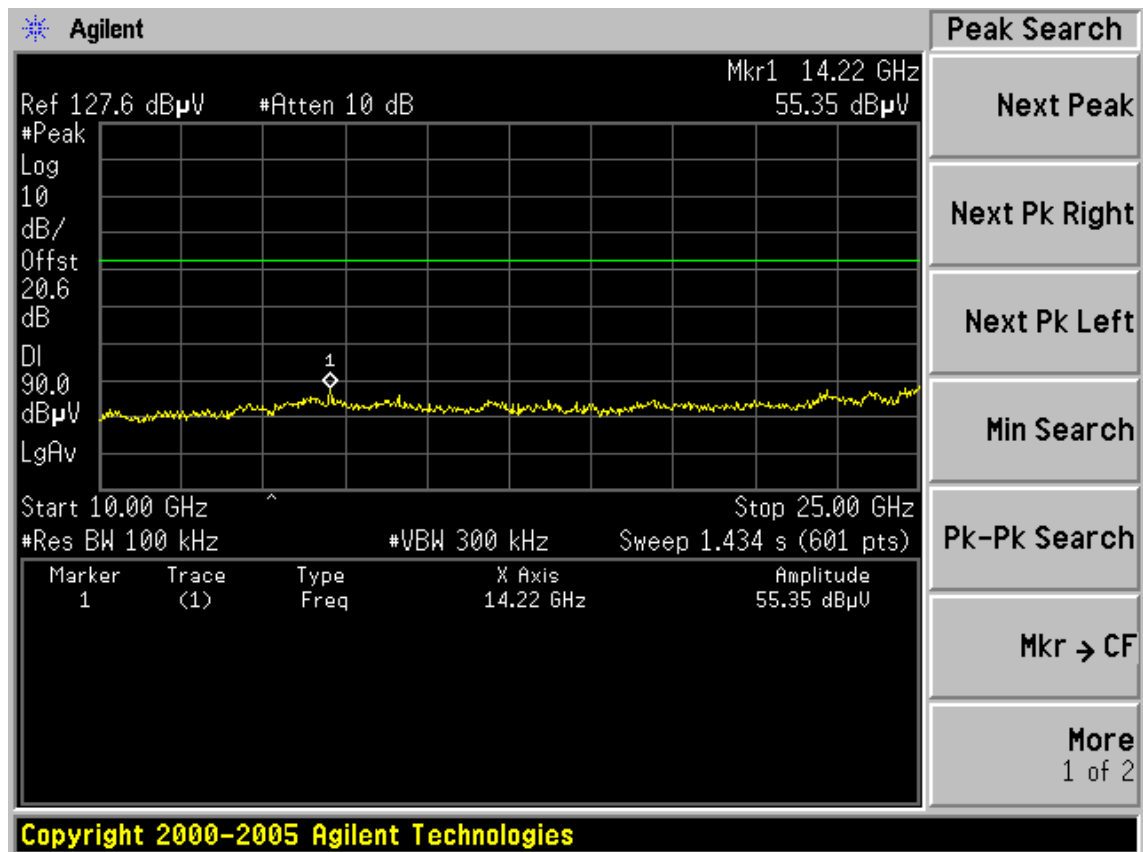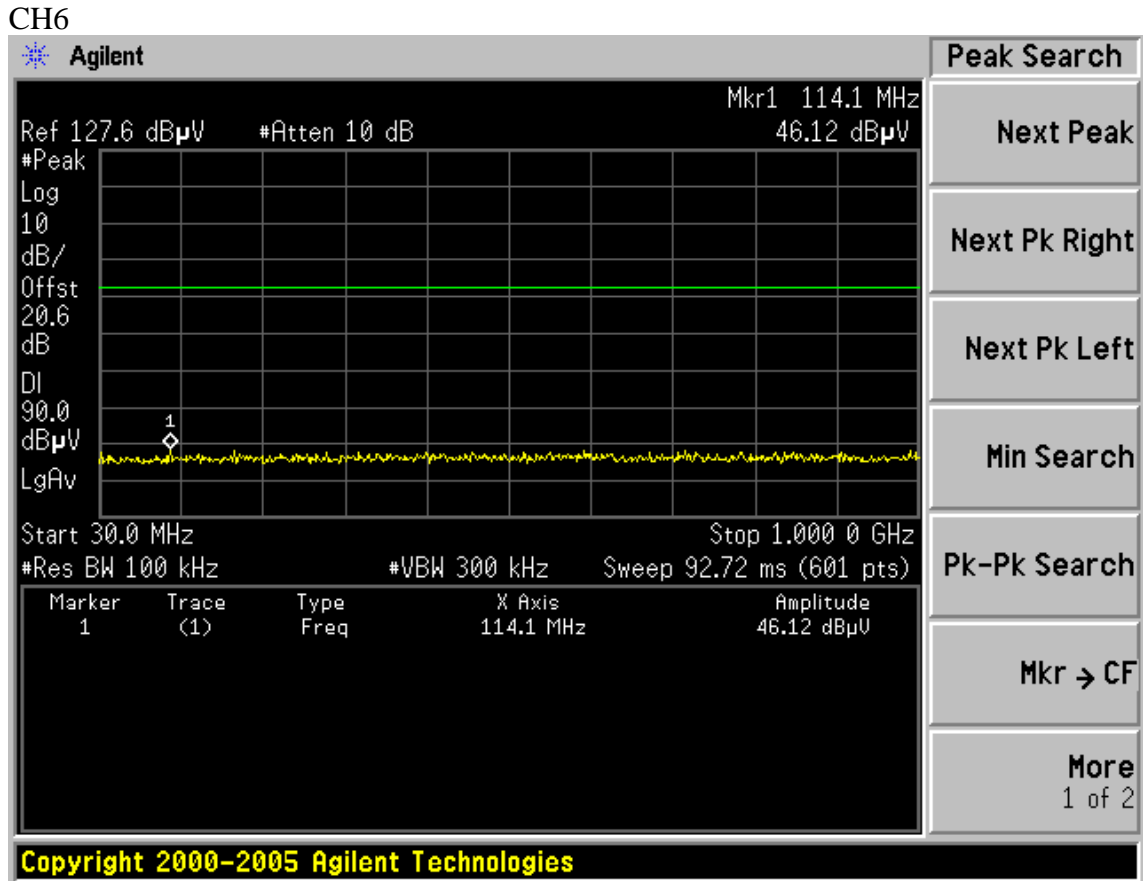


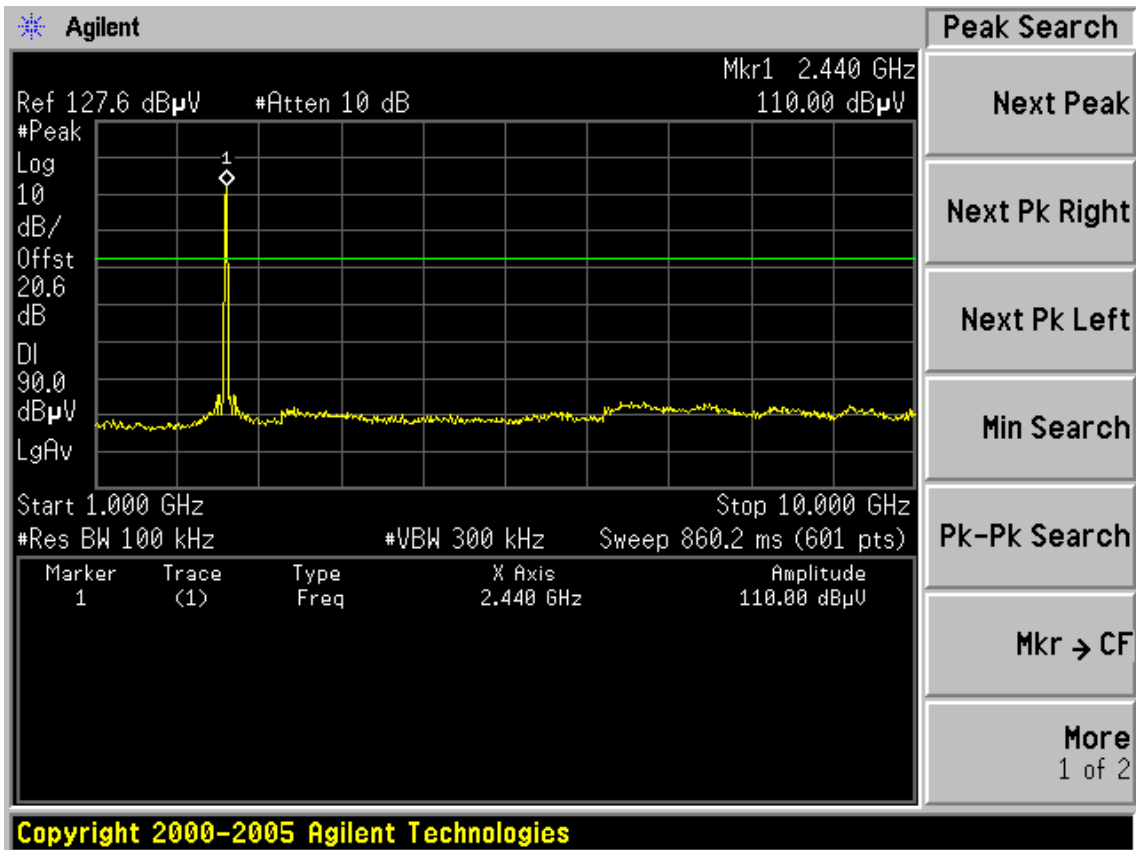


CH11


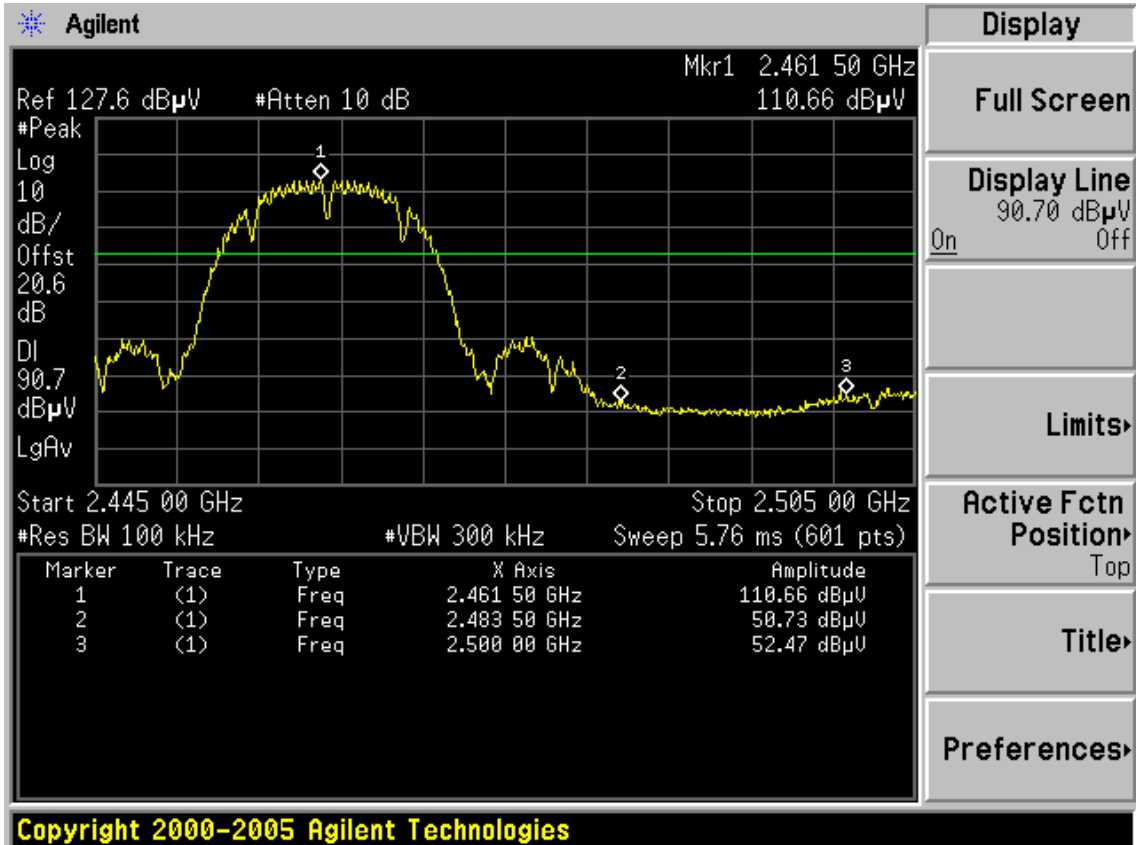


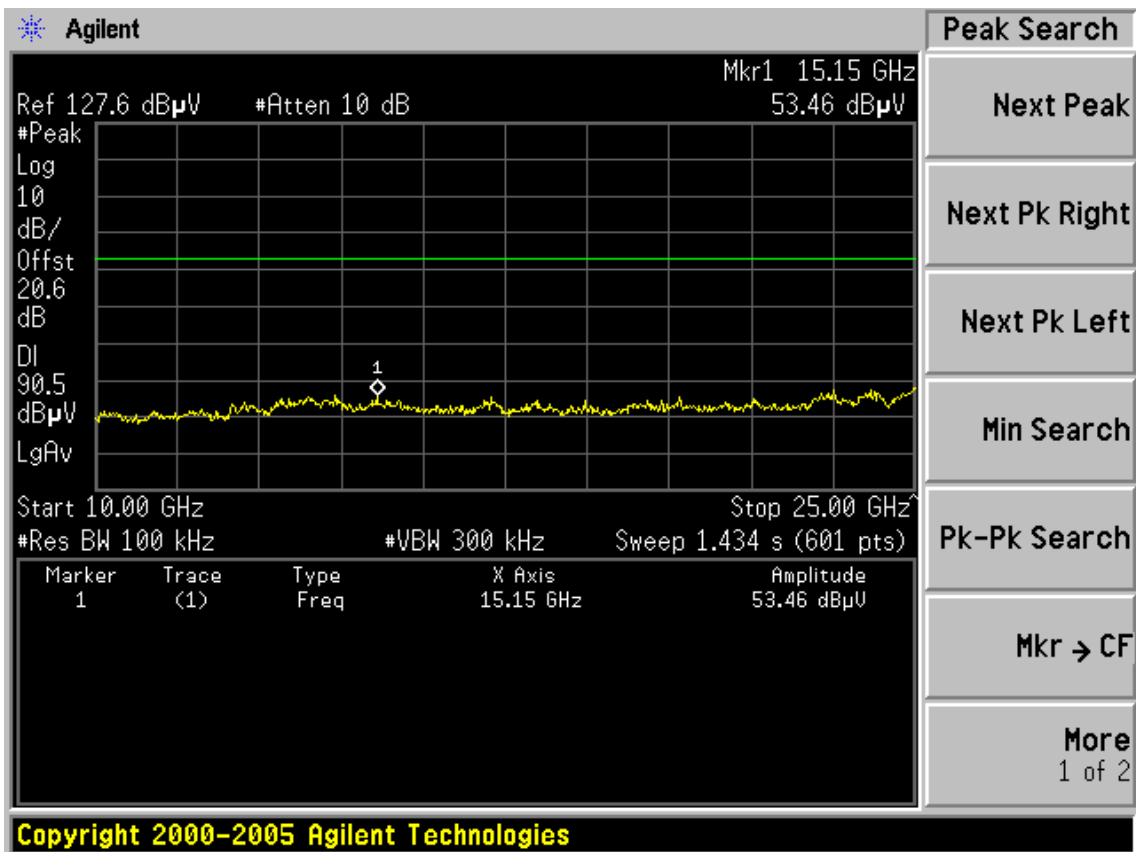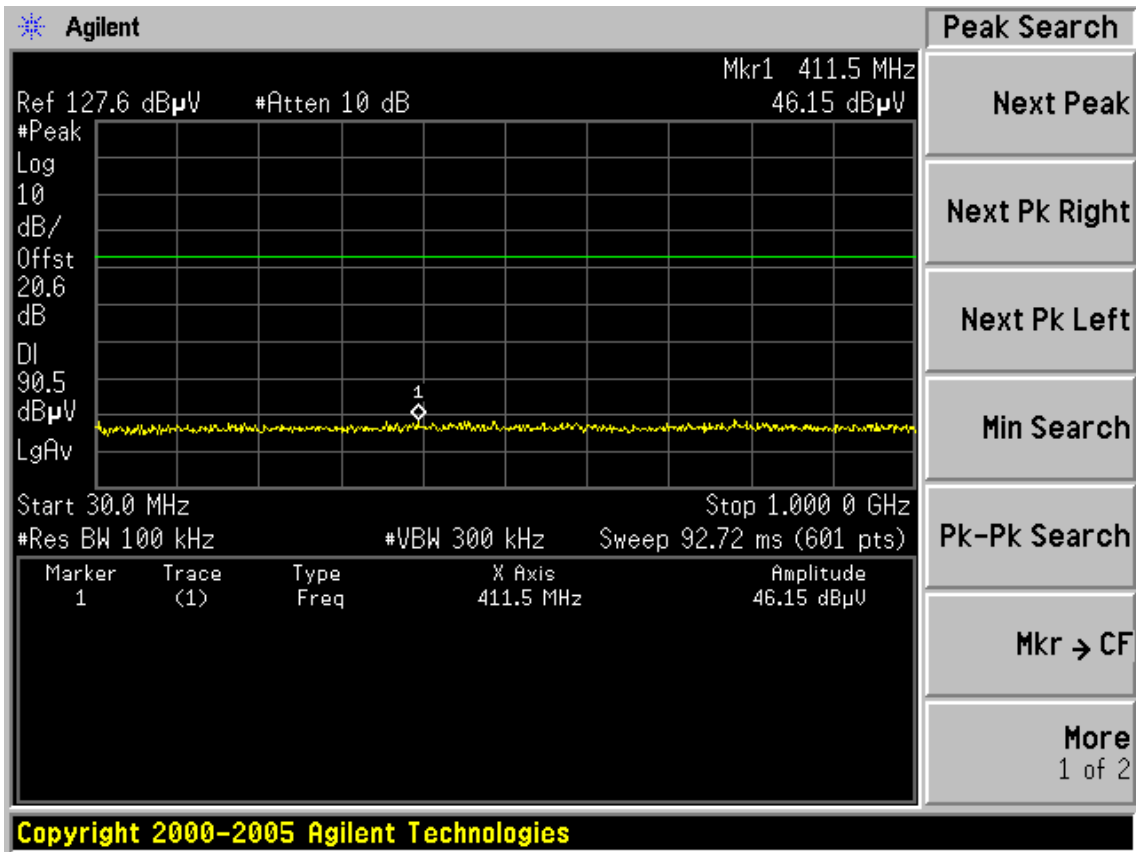


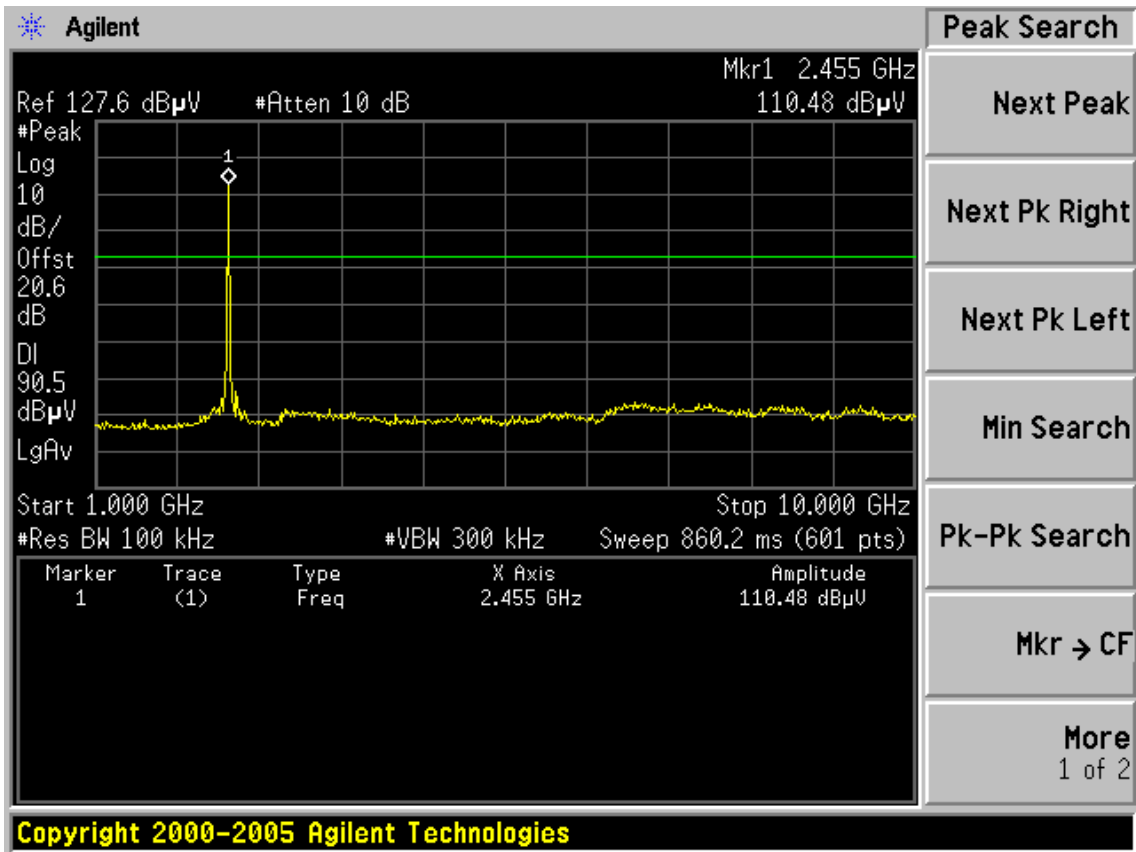


Test Mode: IEEE 802.11gTX
CH1


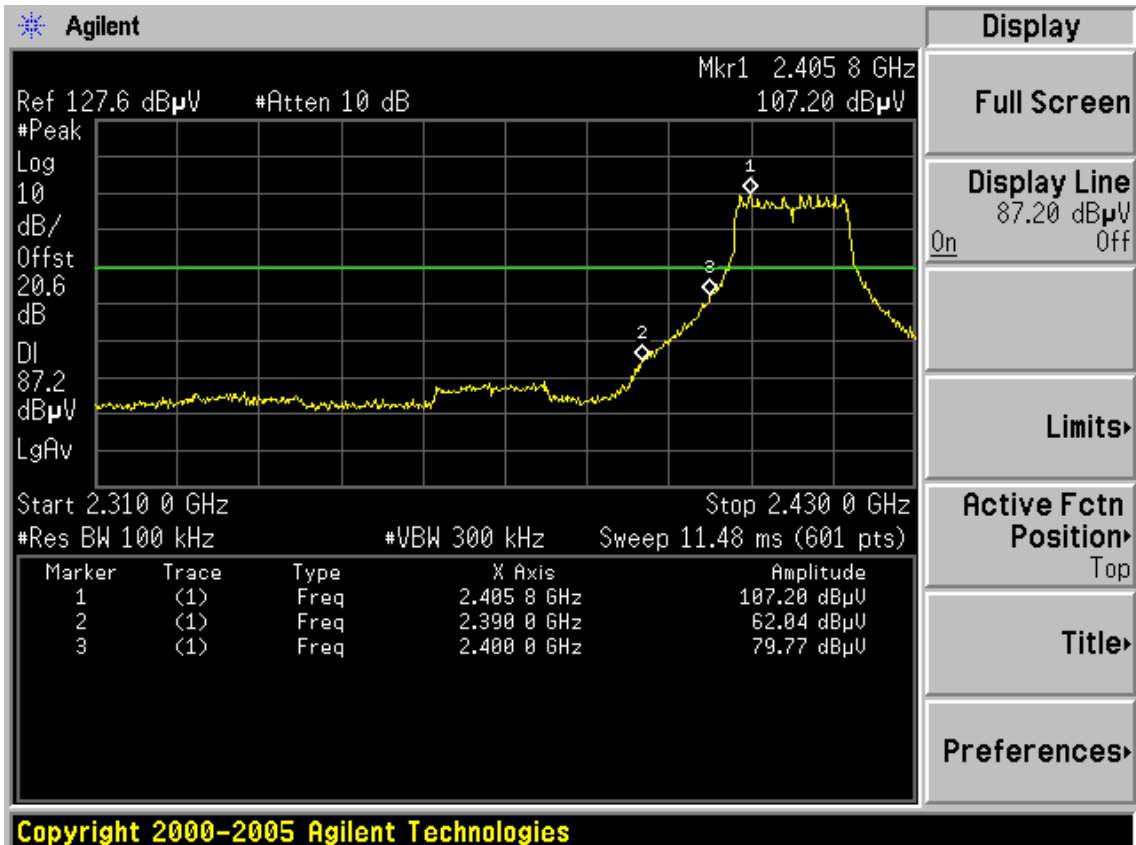


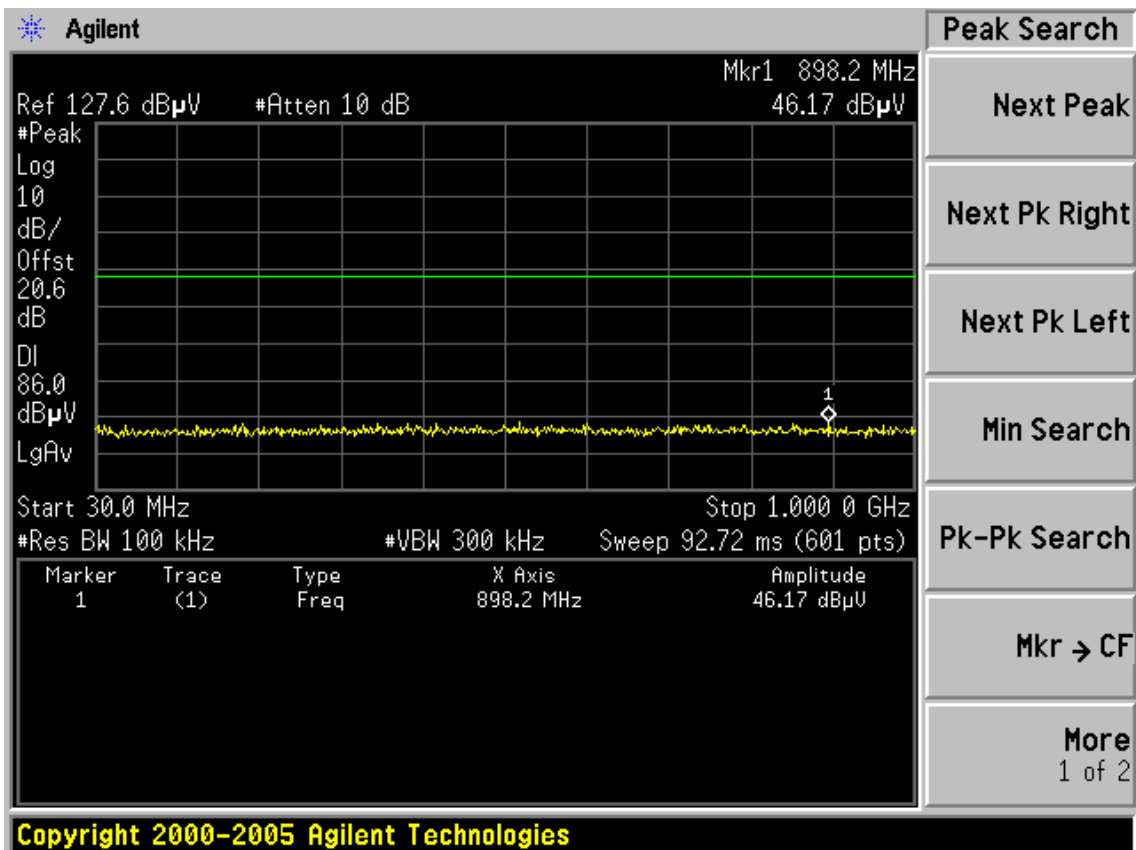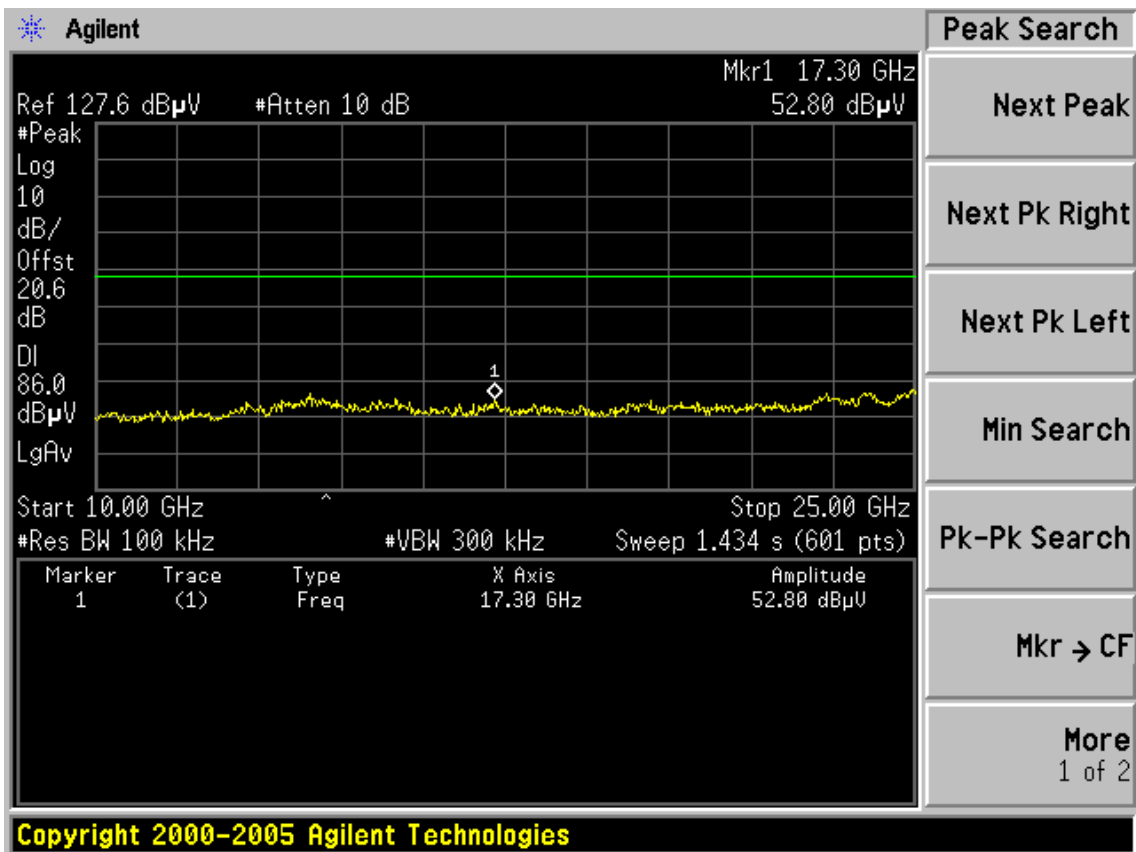


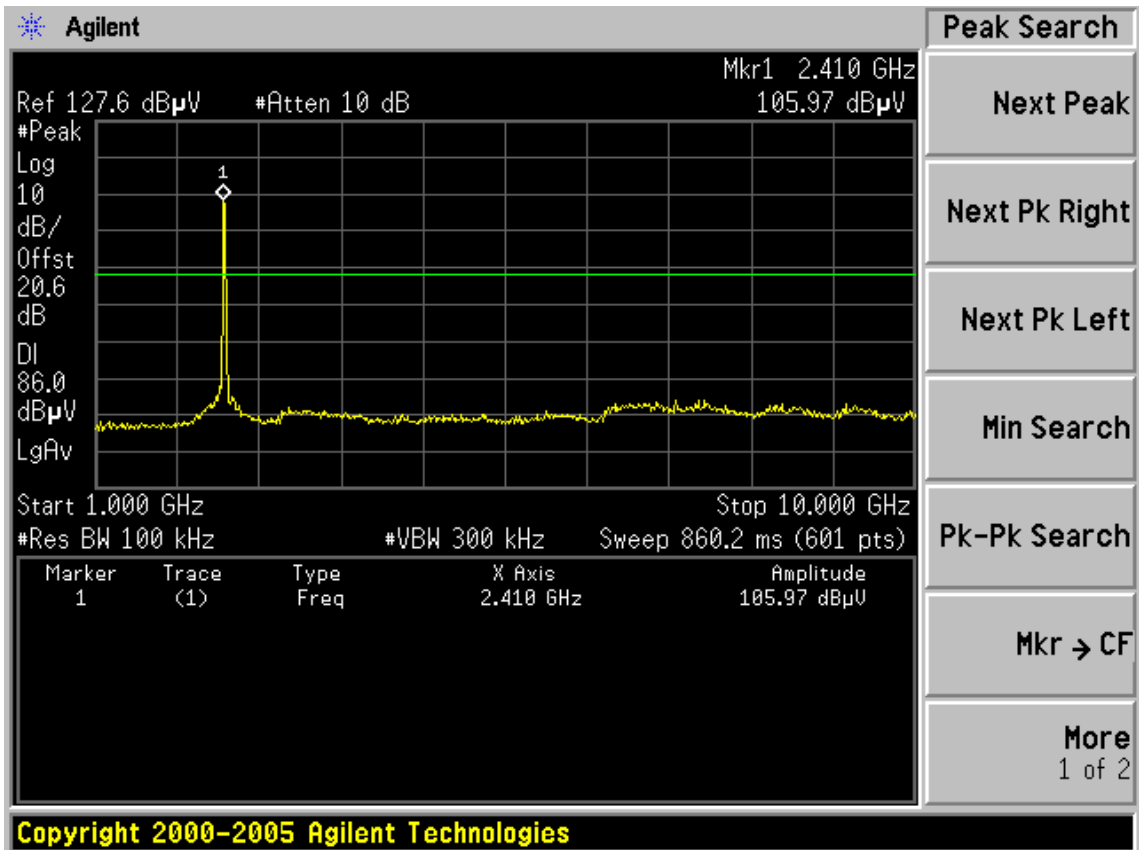




CH6

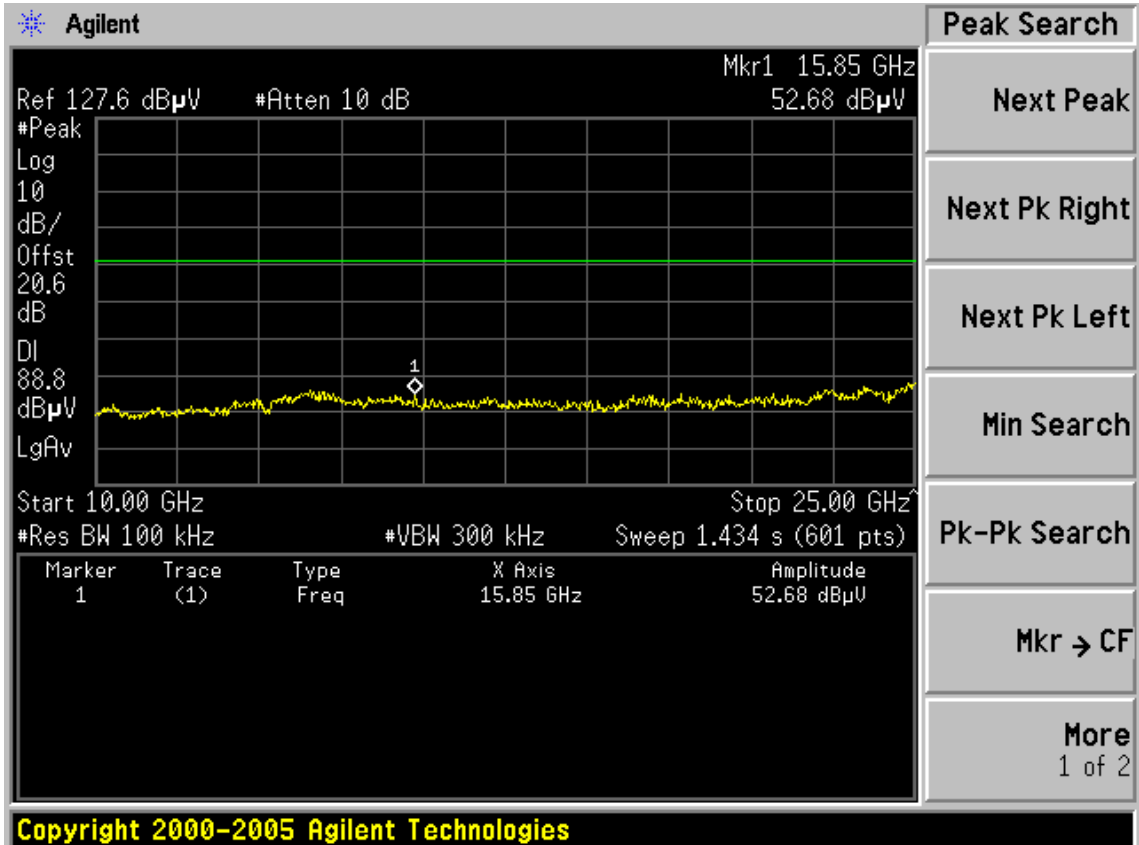

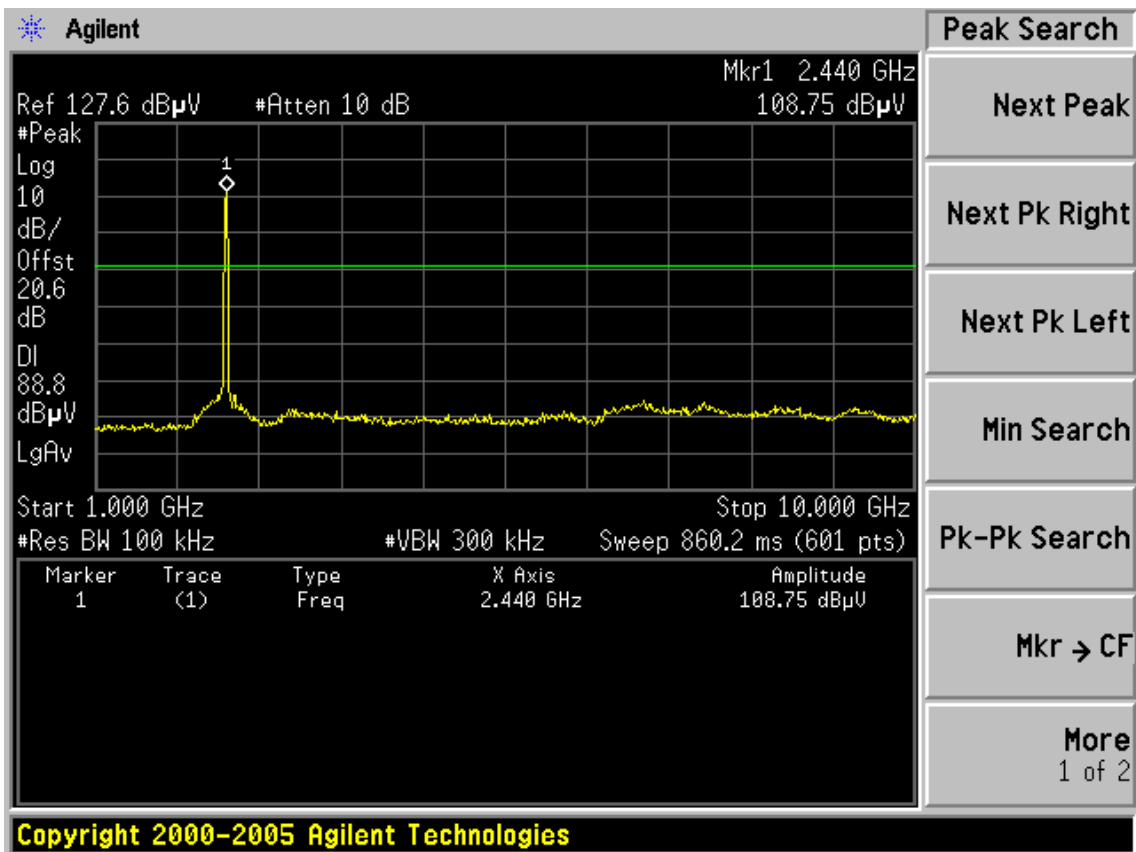
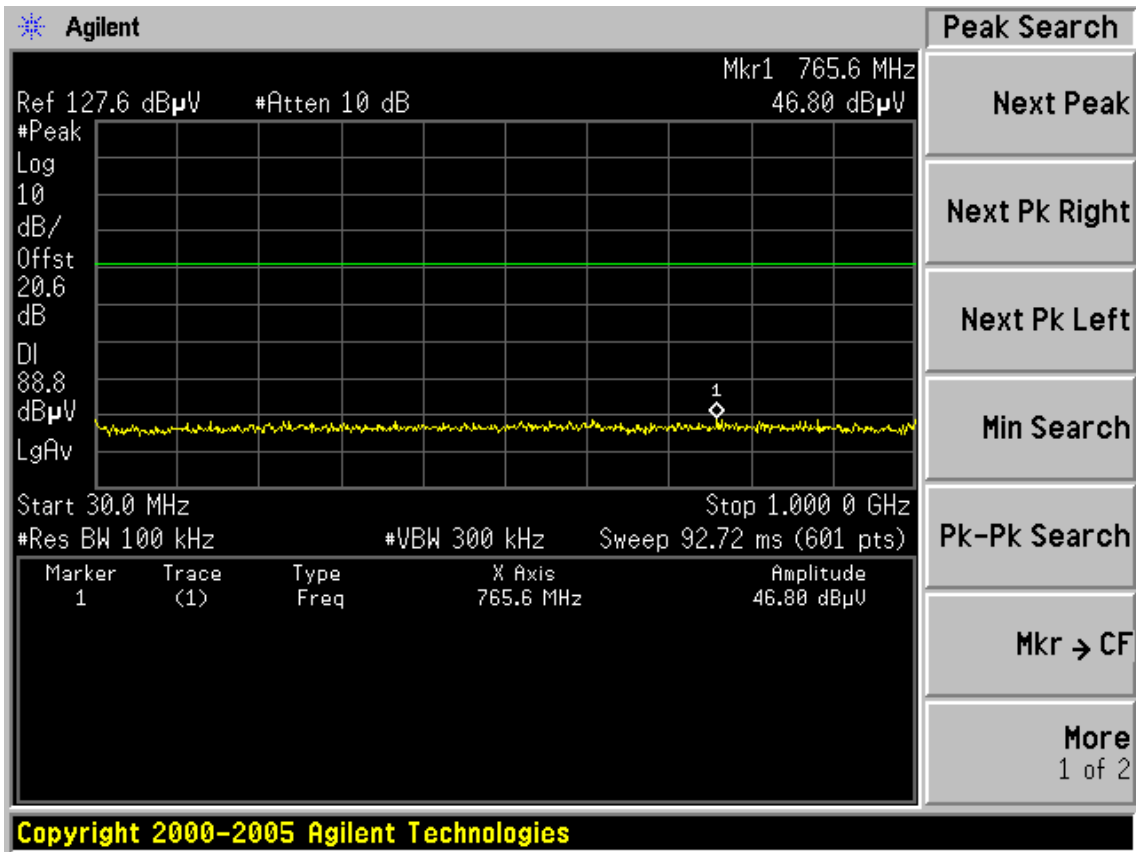




CH11

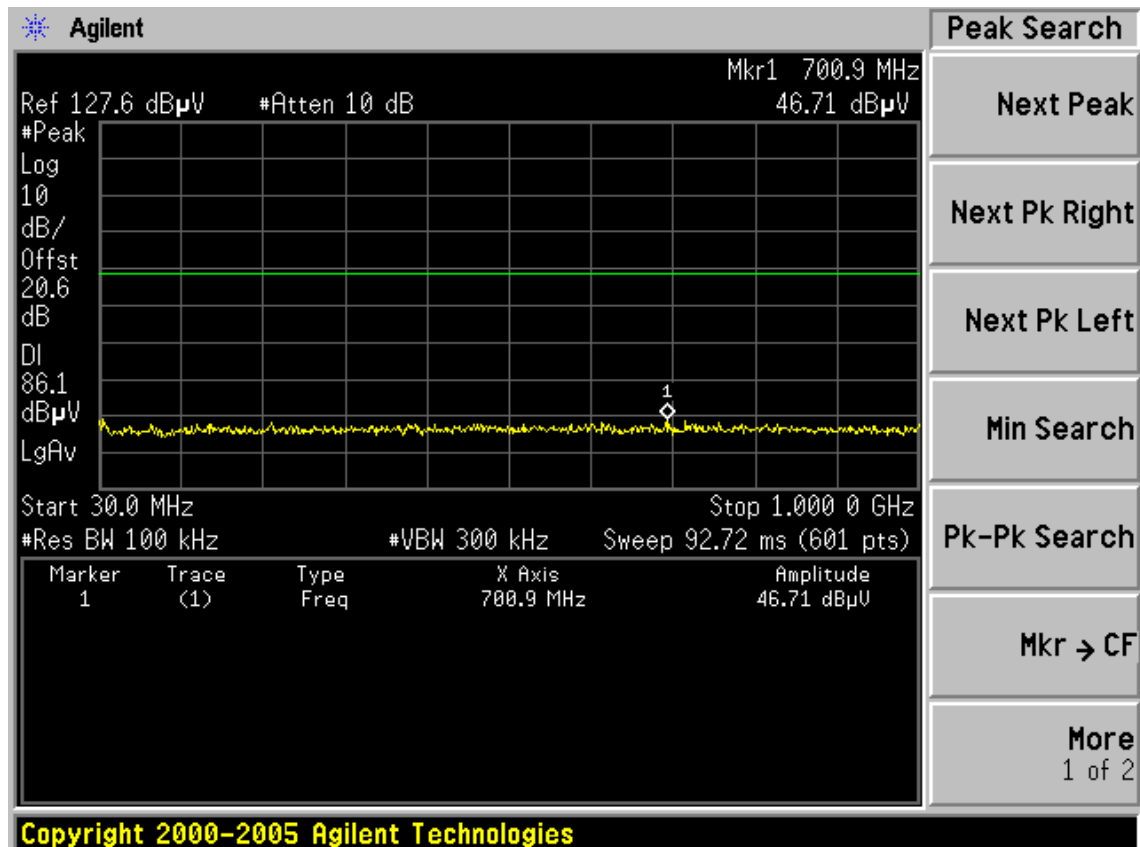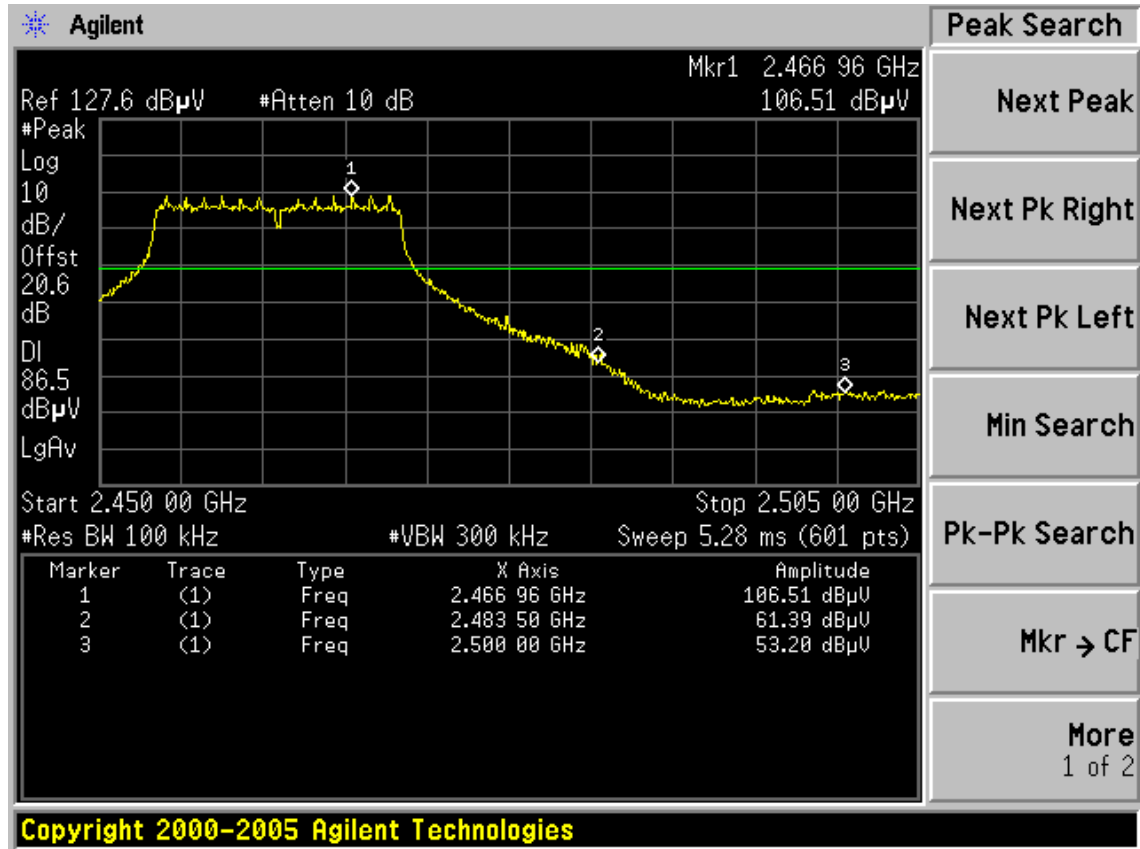

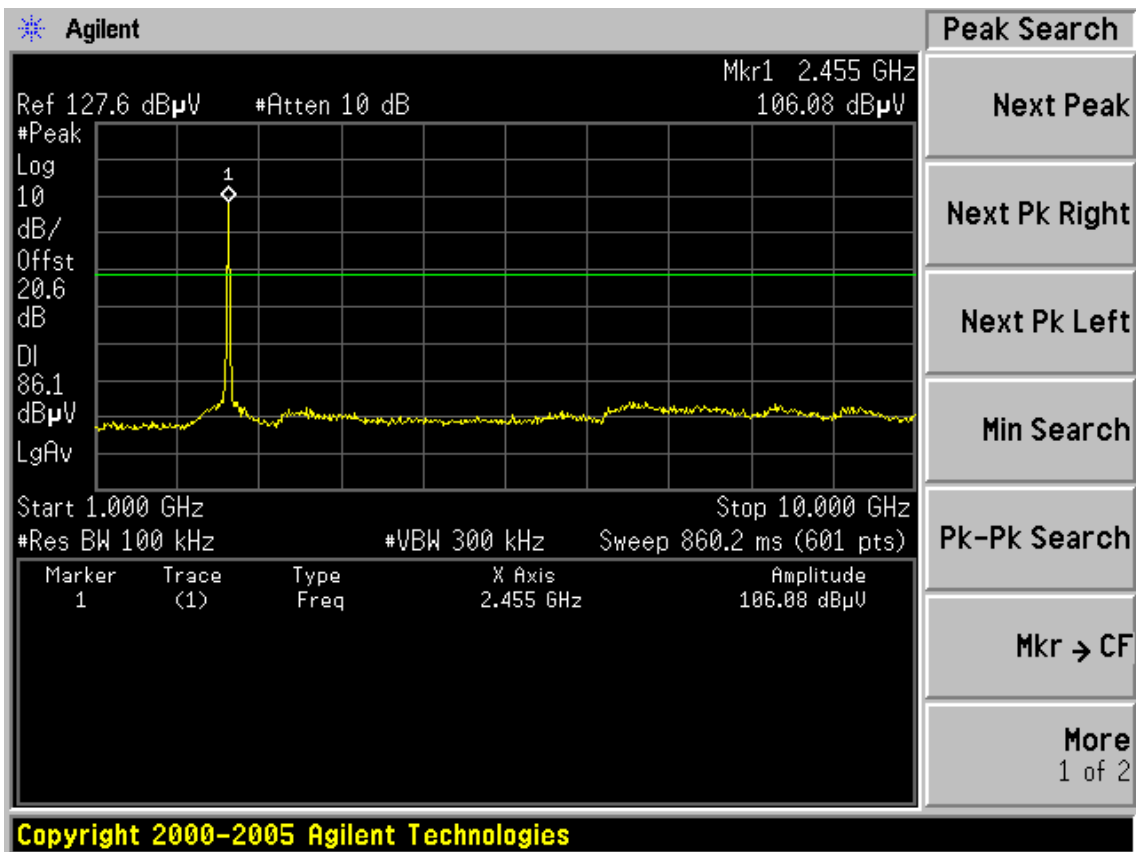
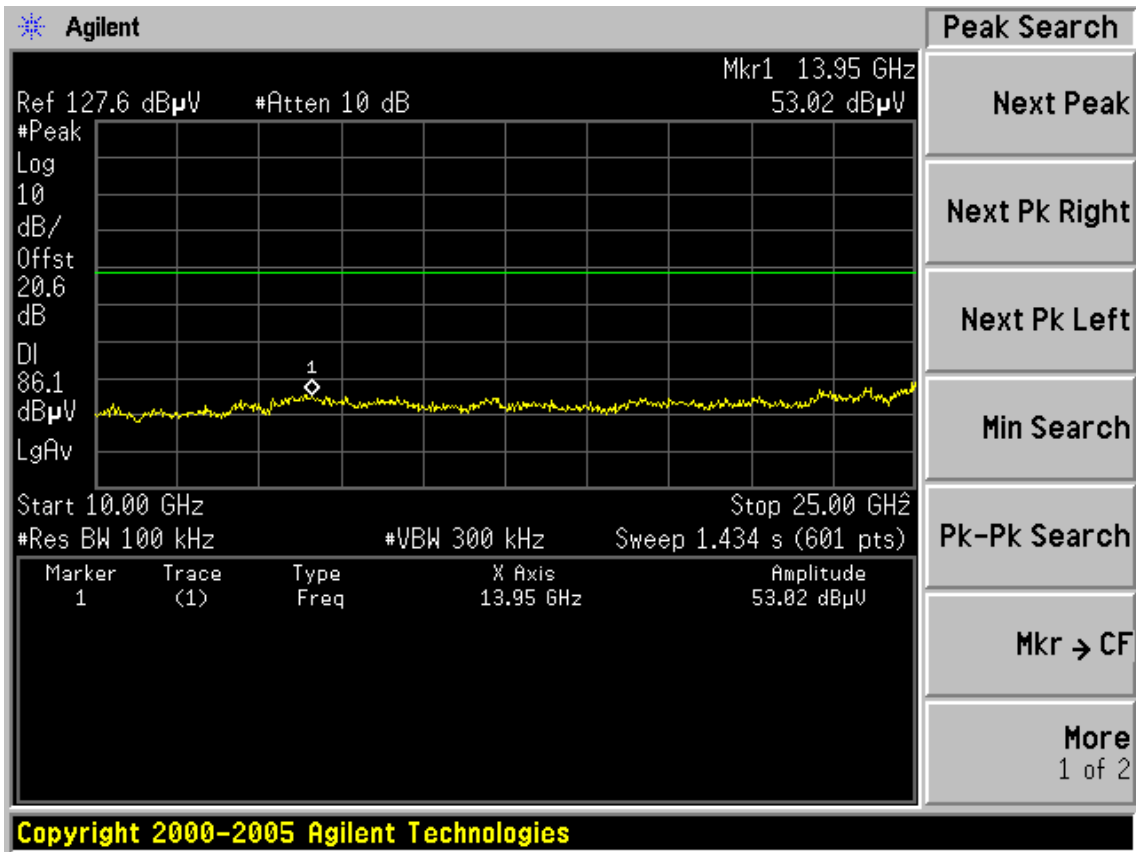



Test Mode: IEEE 802.11n HT20TX
CH1

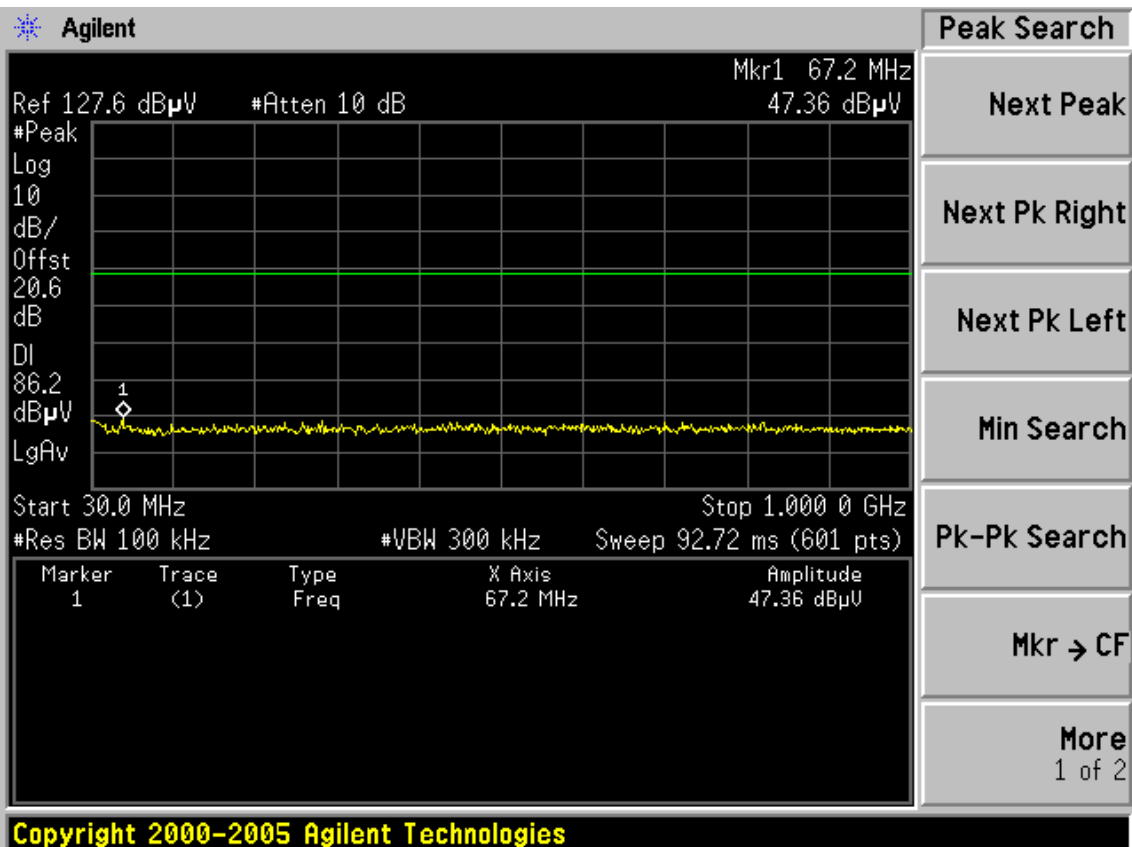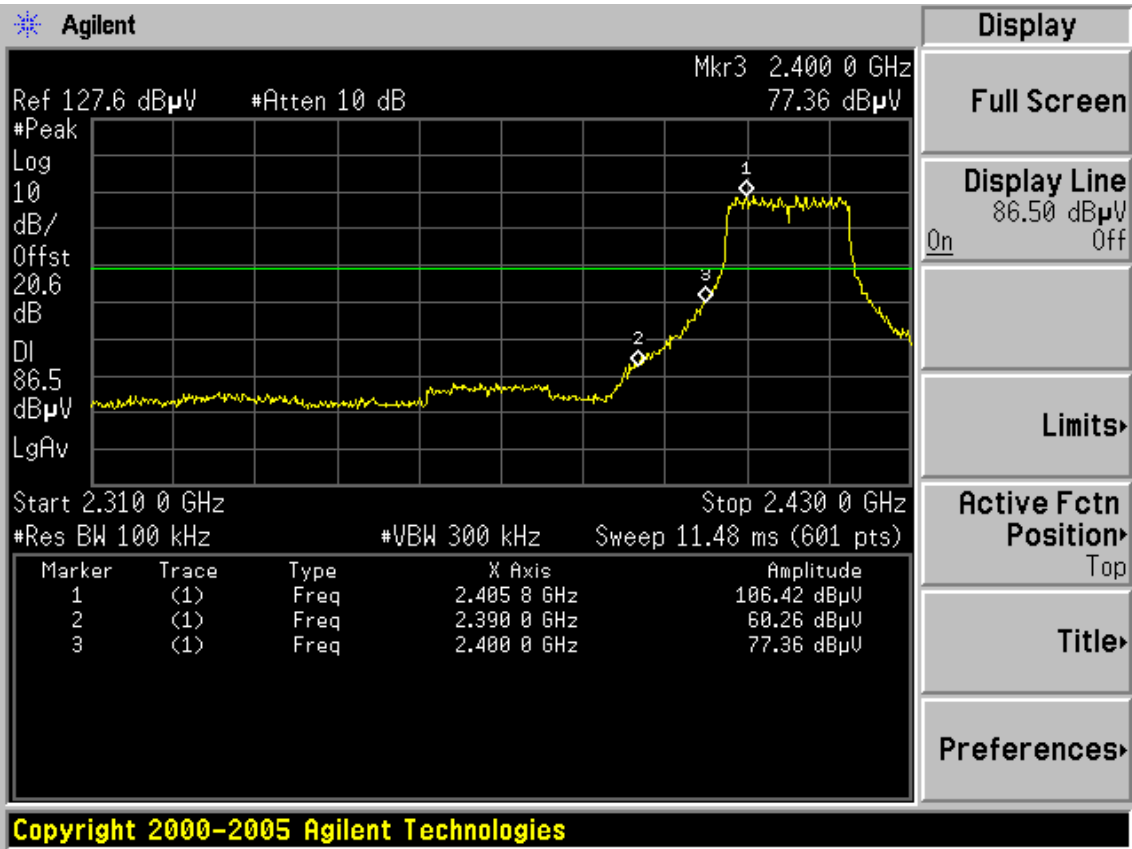

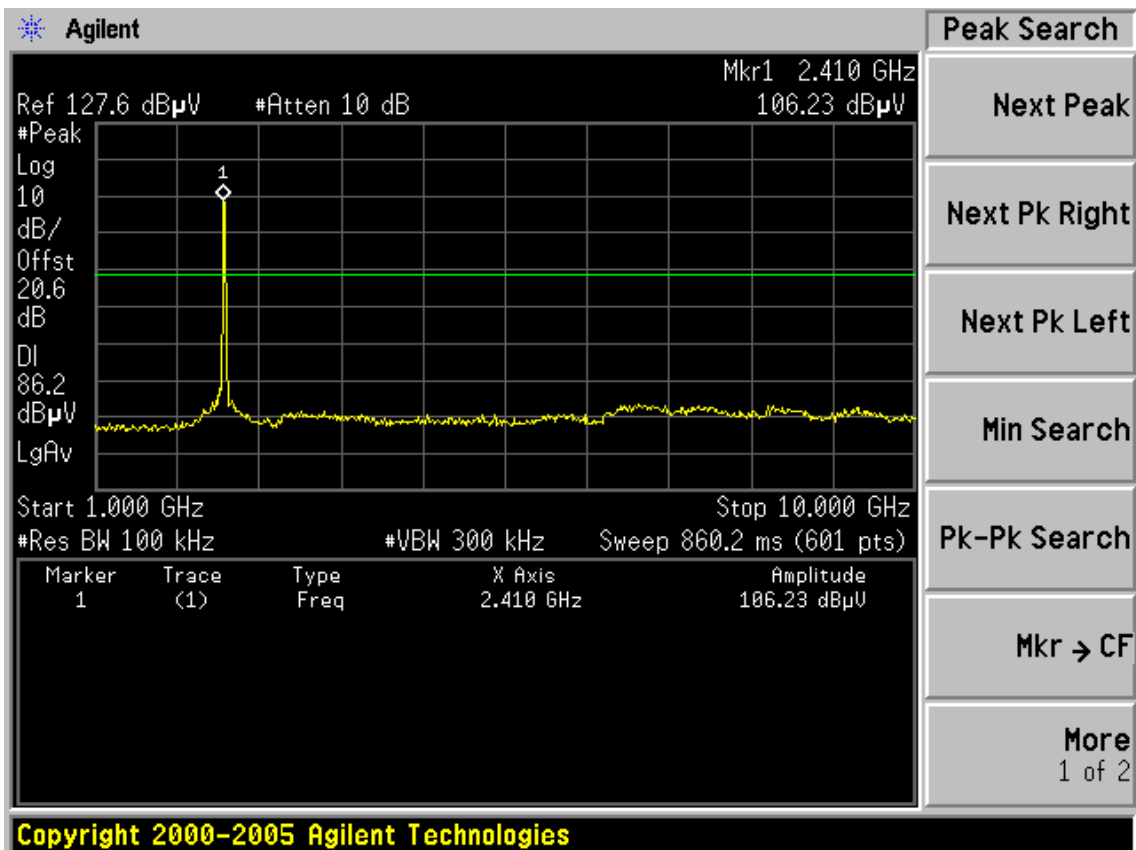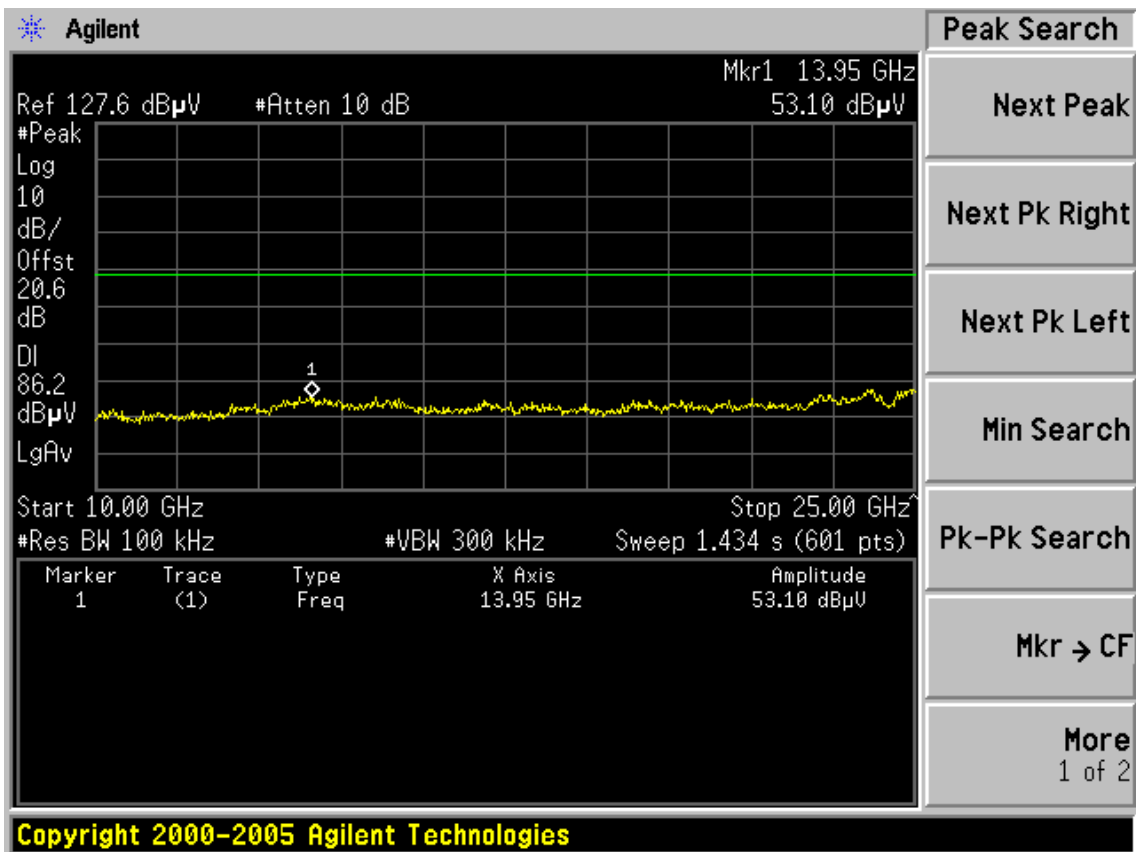




CH6

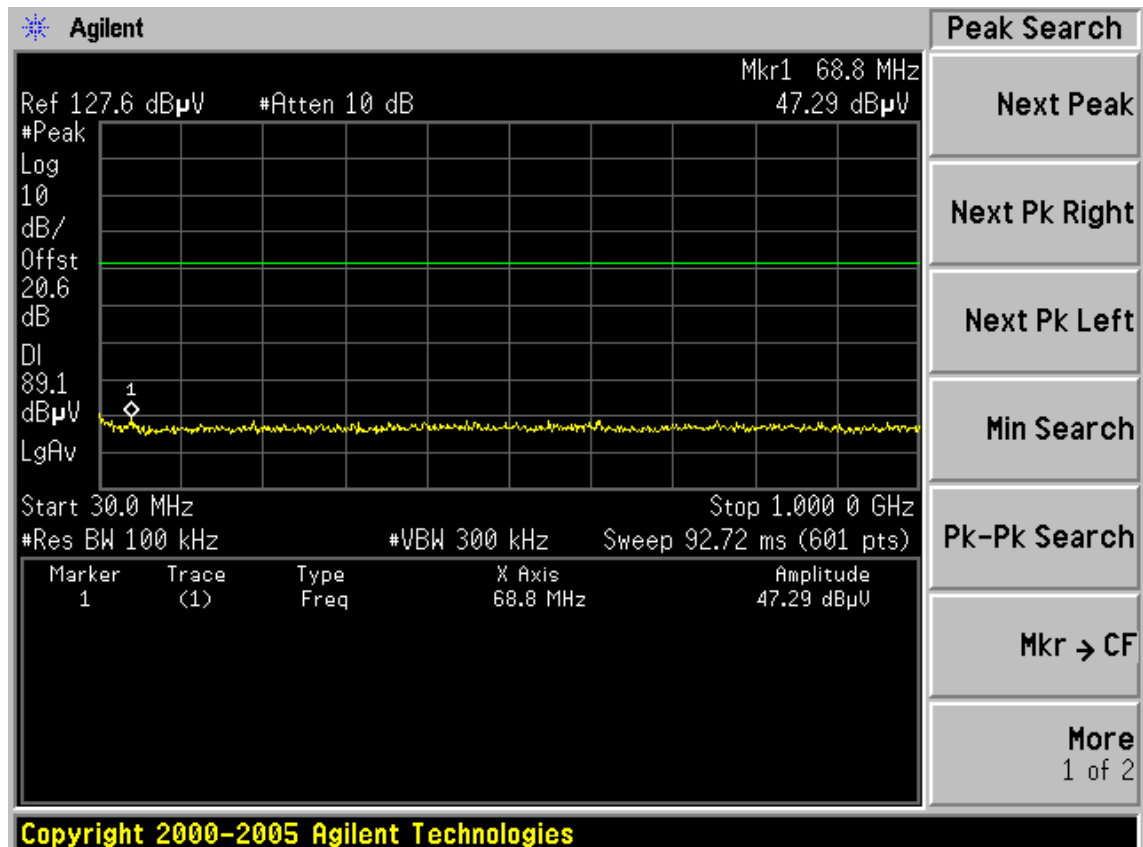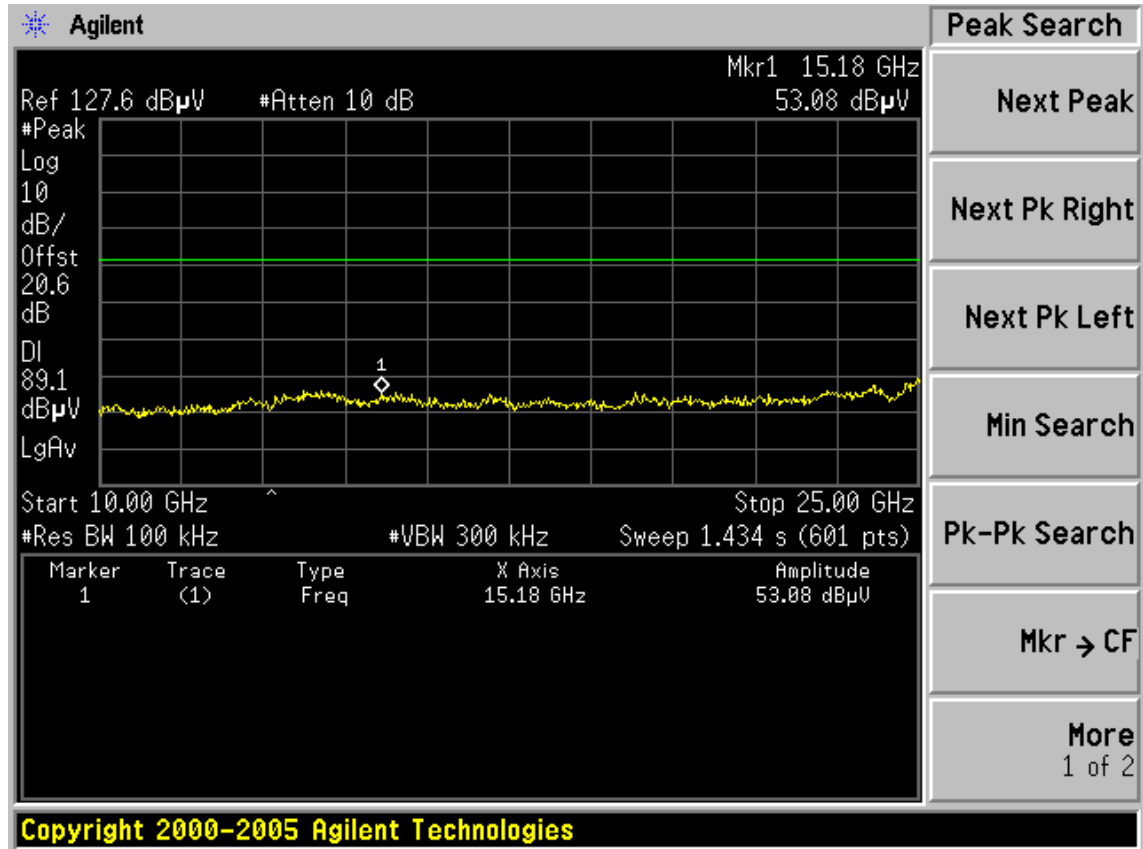


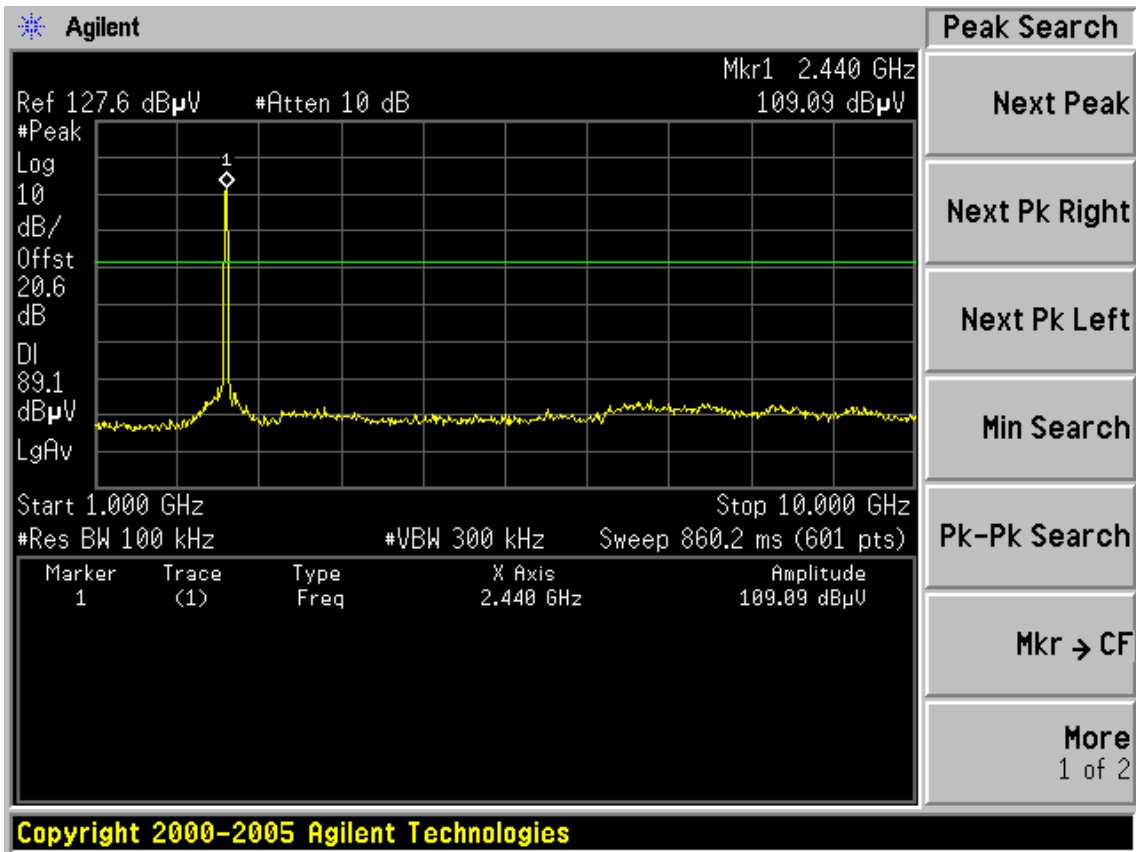


CH11


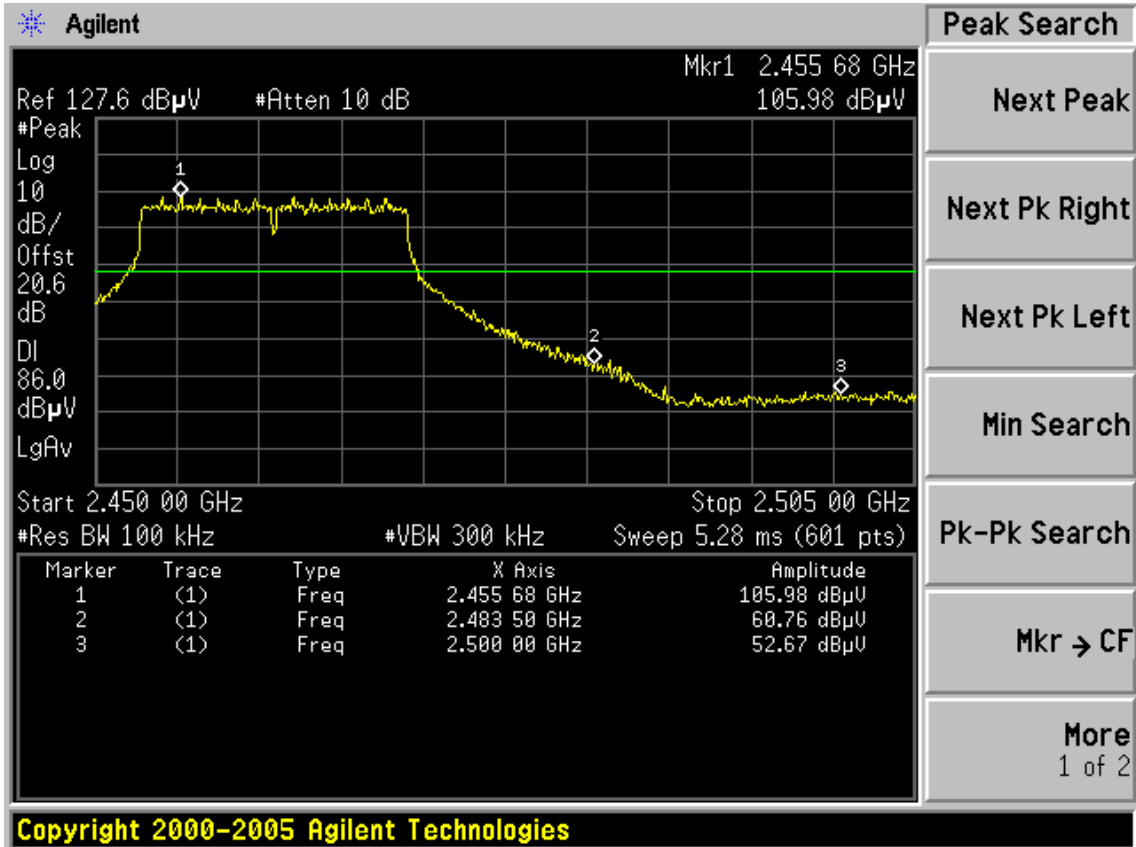


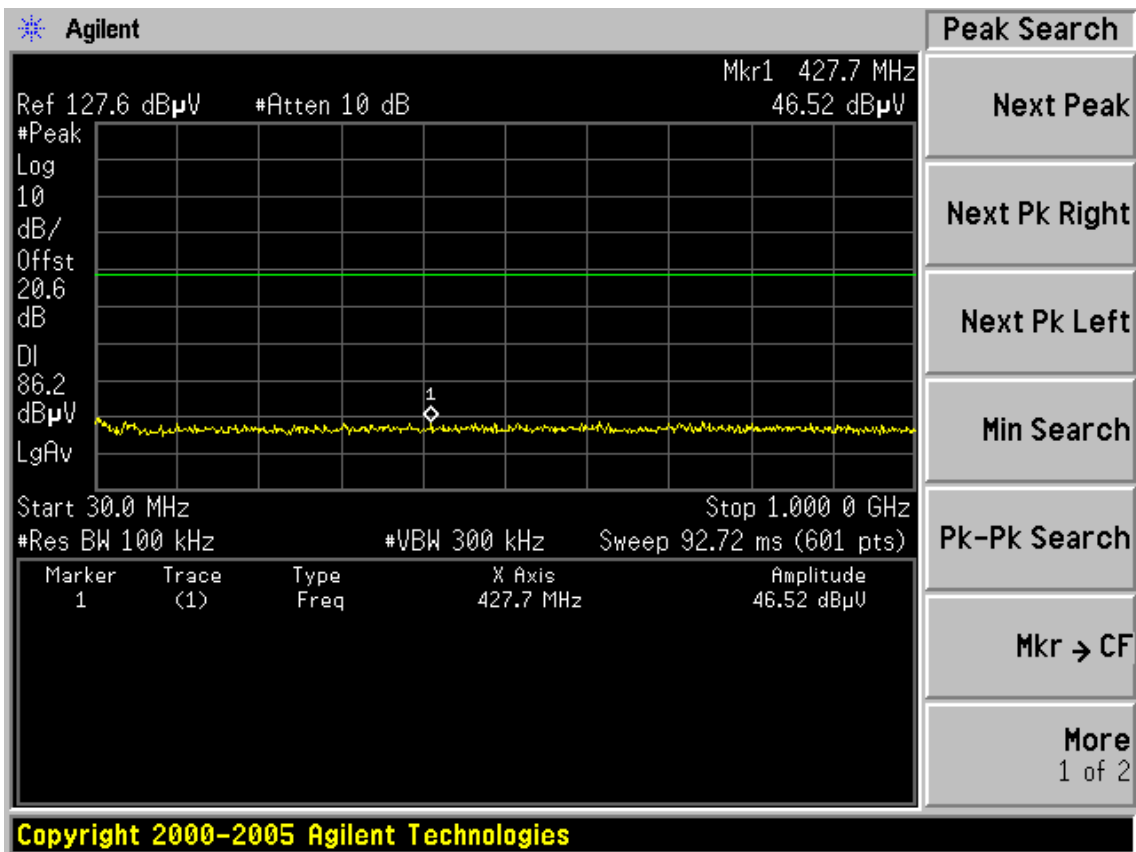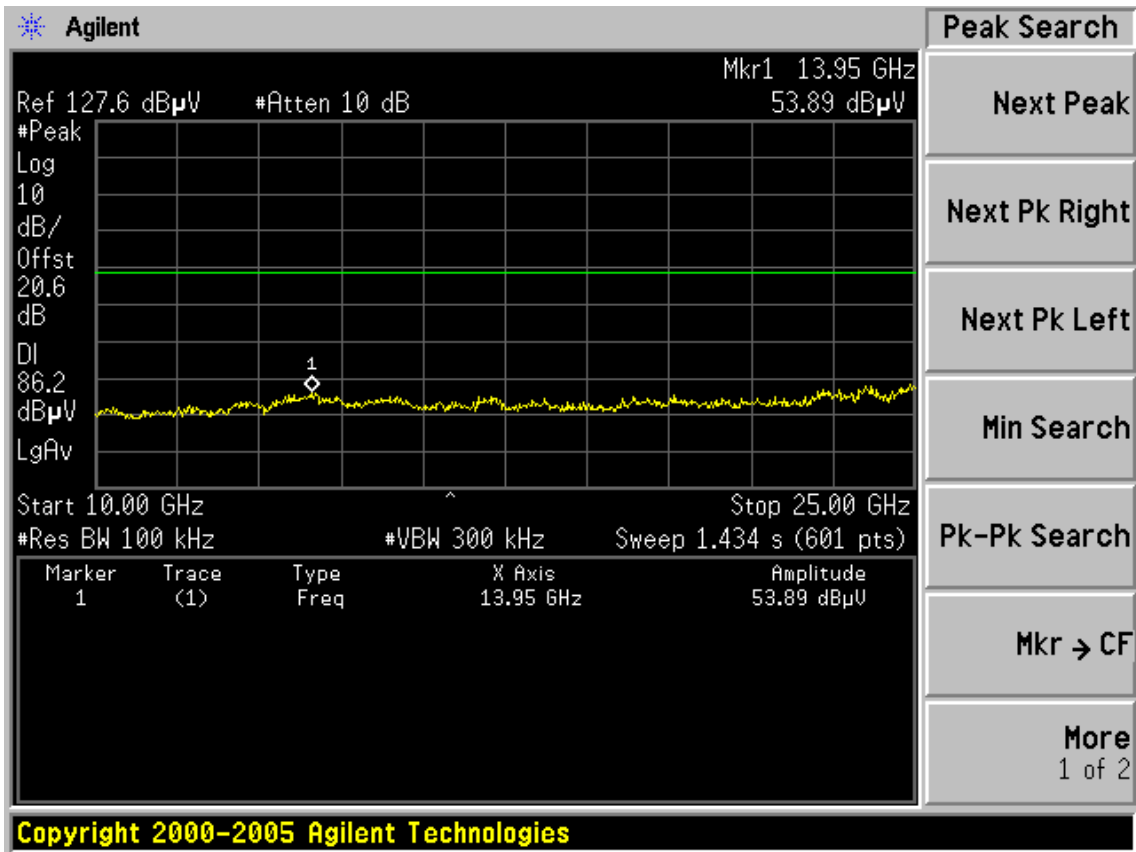


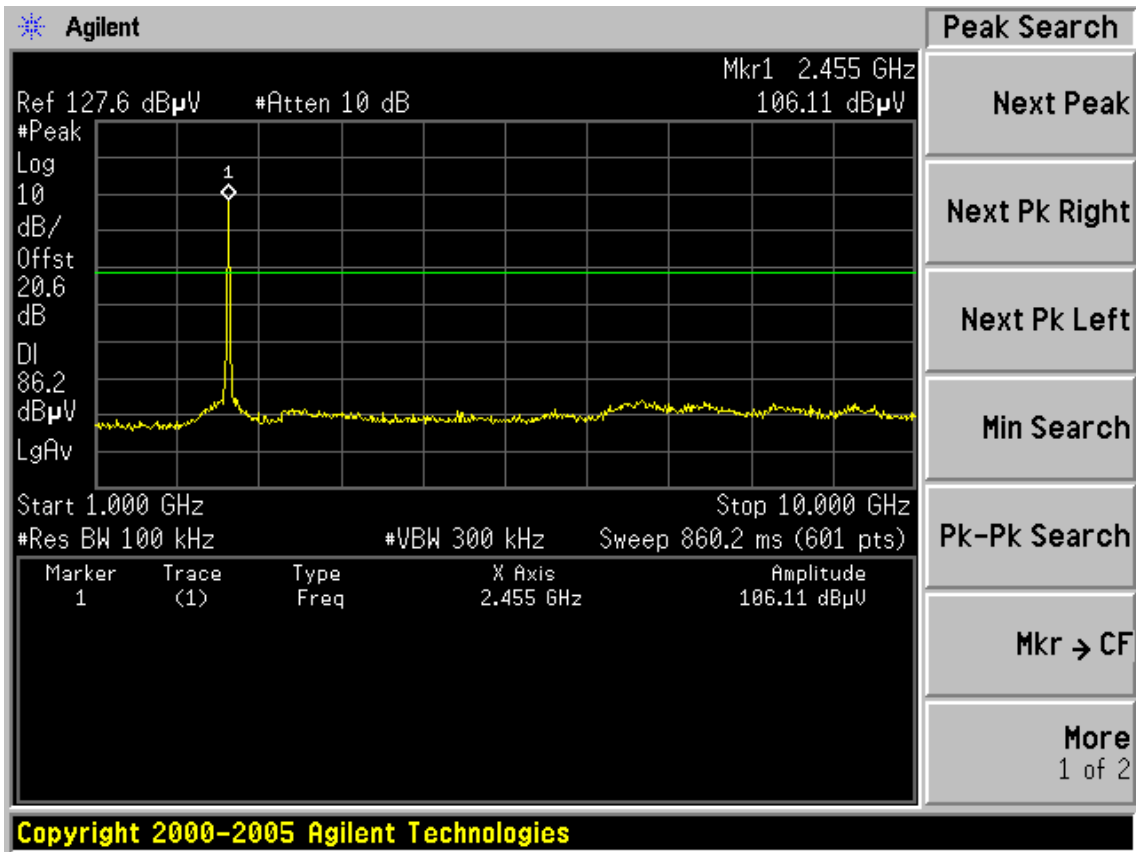


Test Mode: IEEE 802.11n HT40 TX
CH1


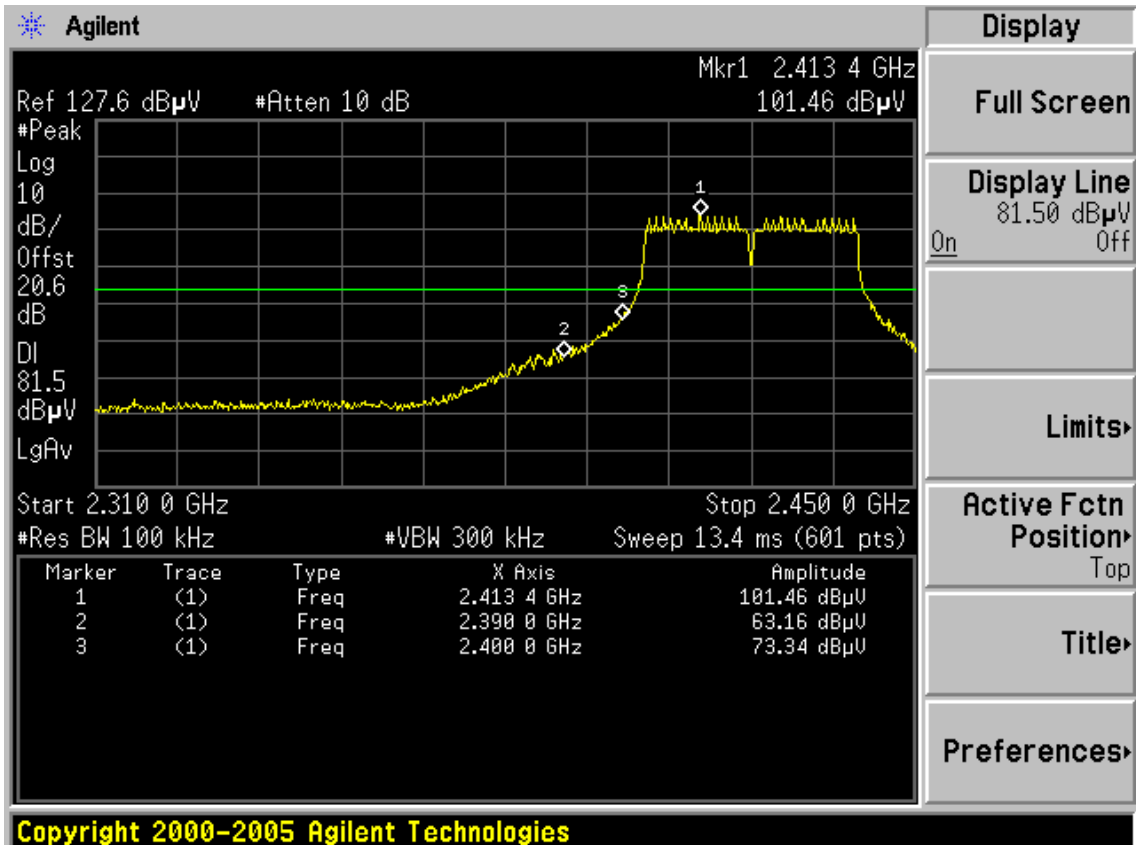


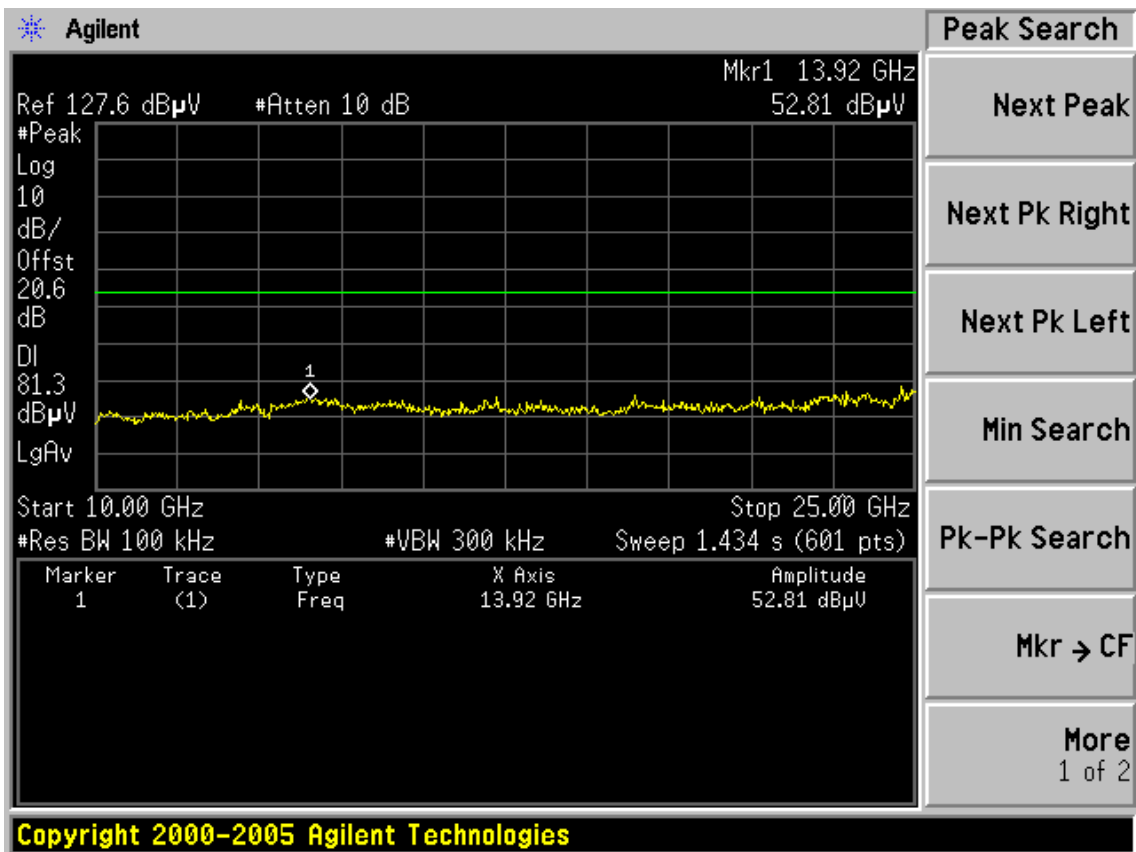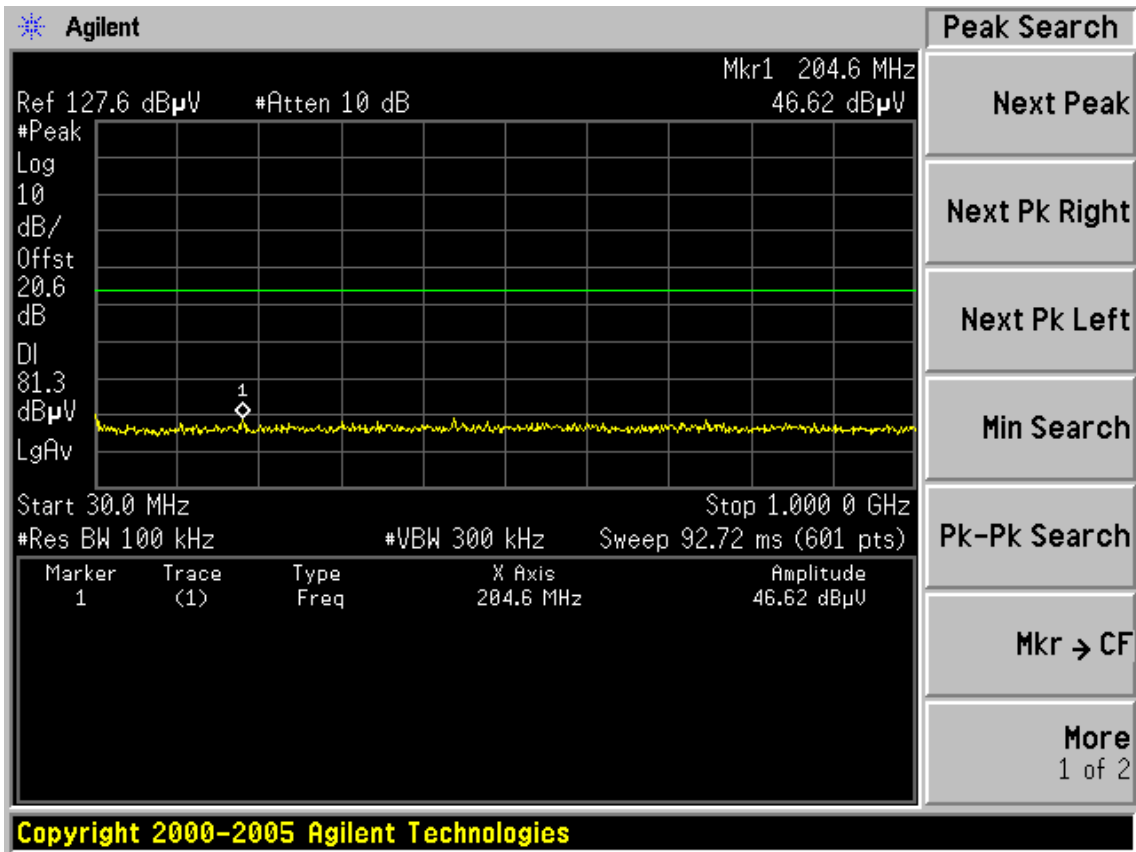


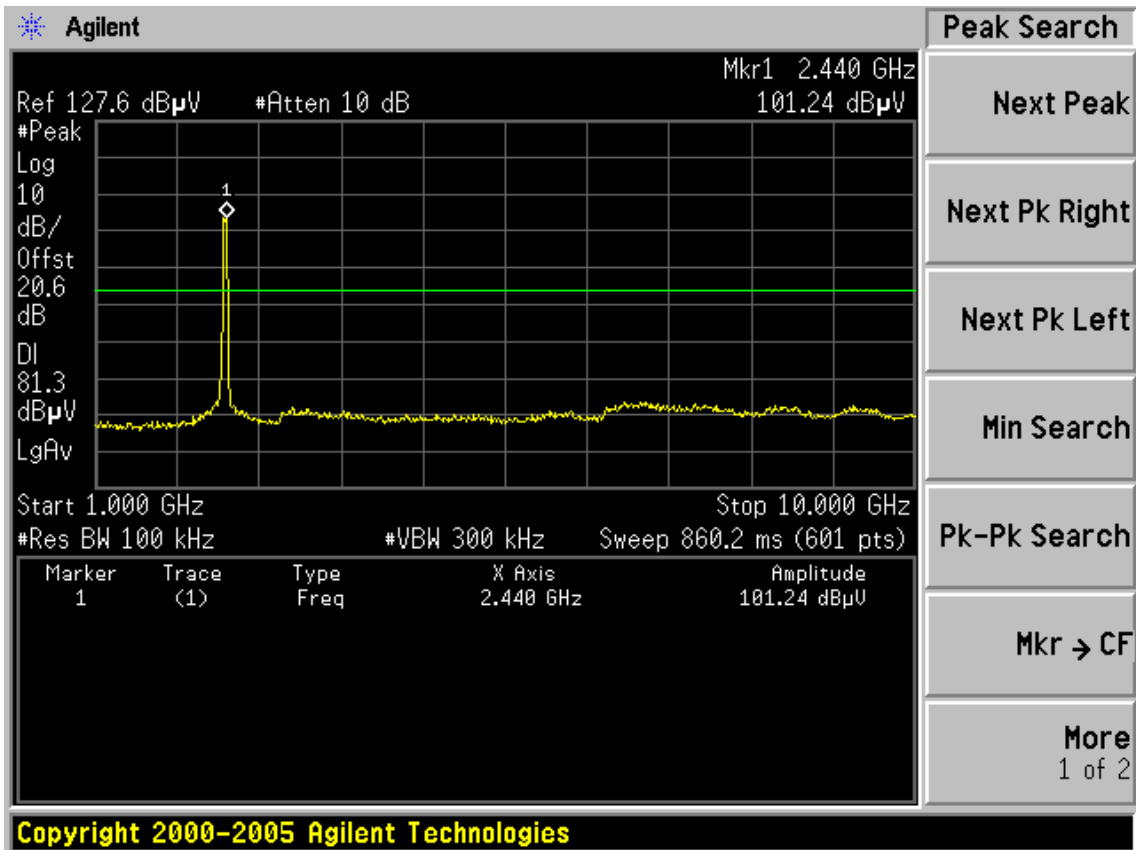




CH4

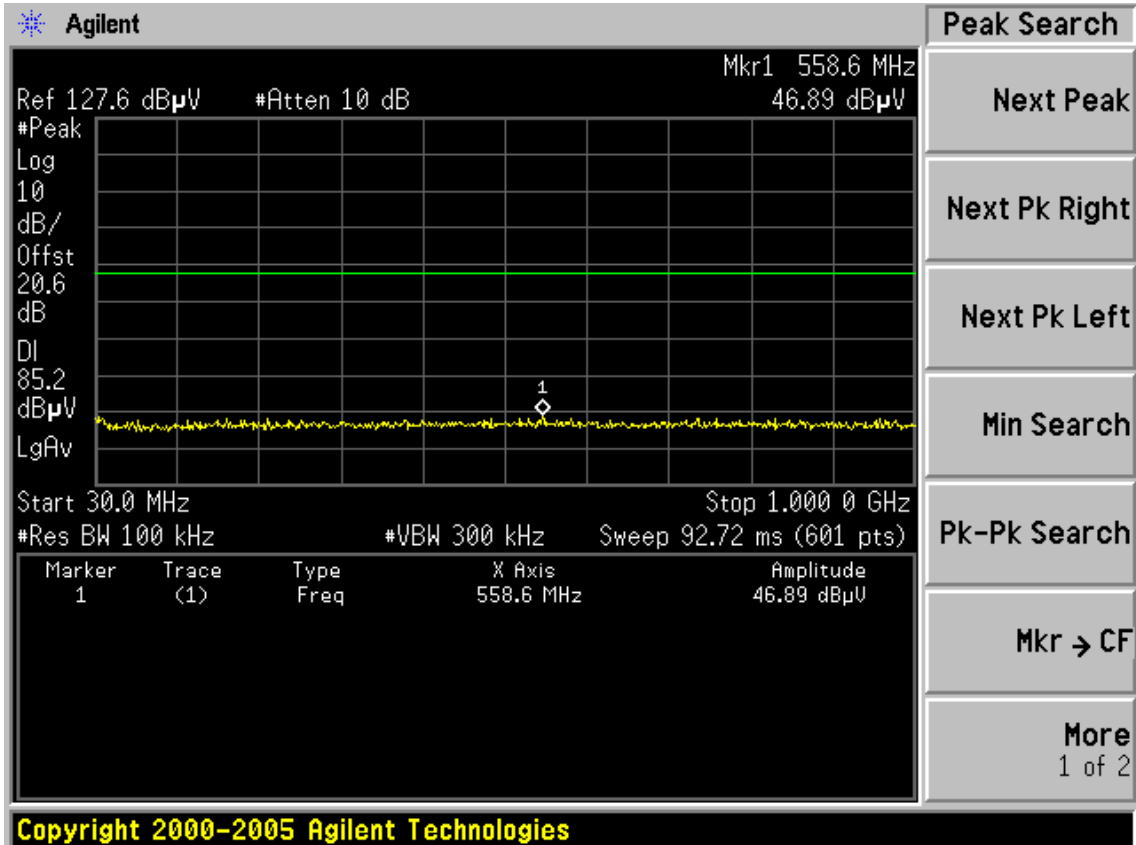

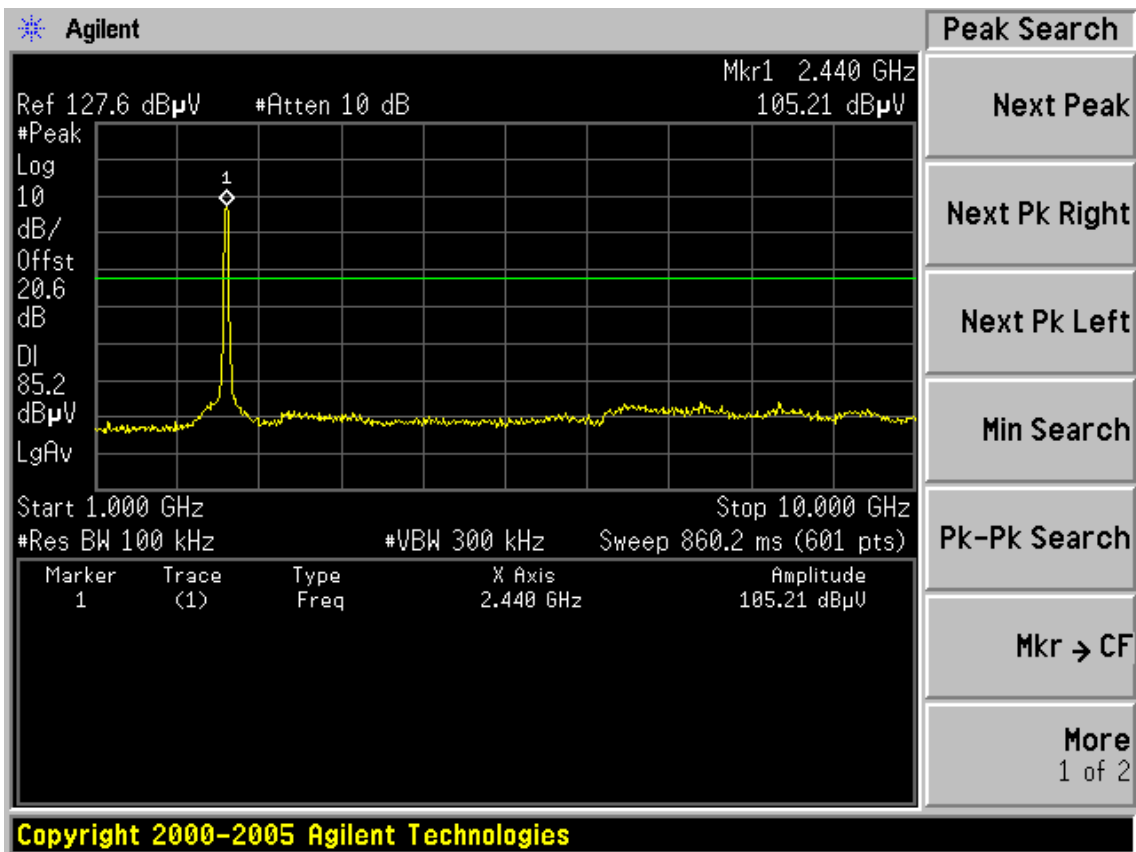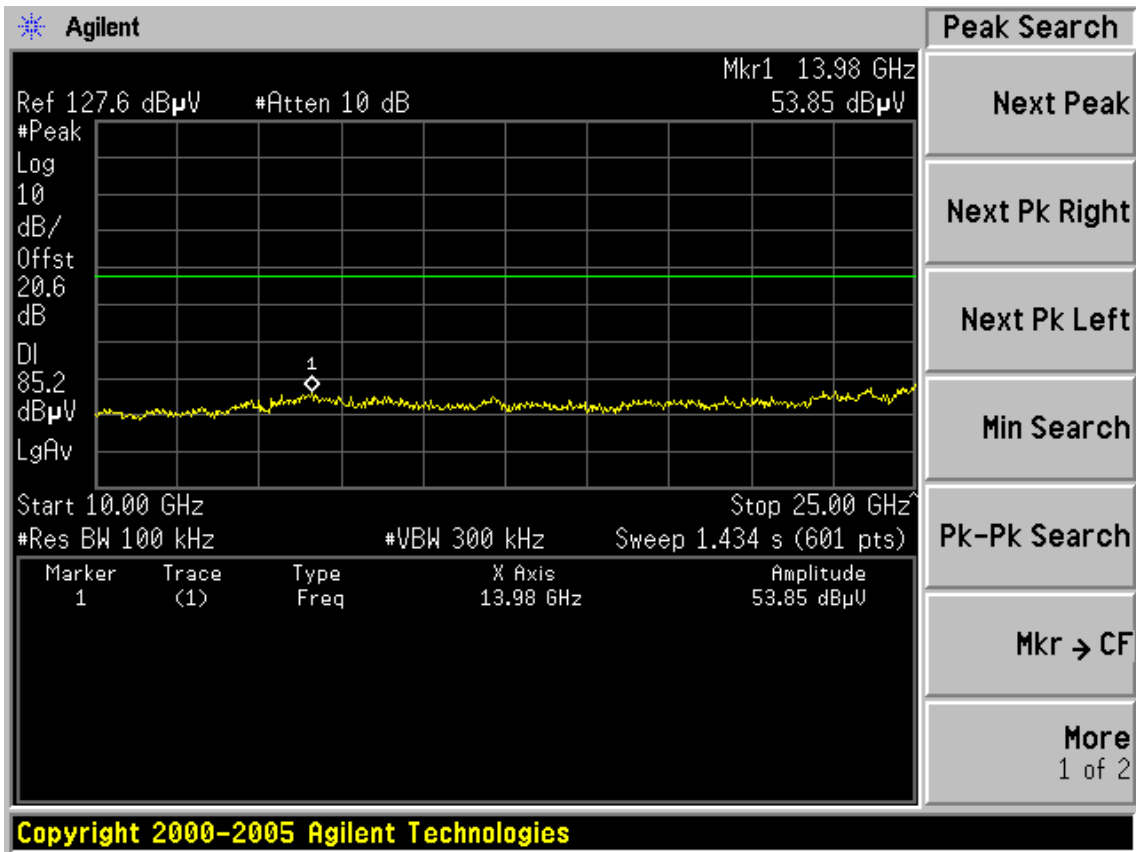

CH7

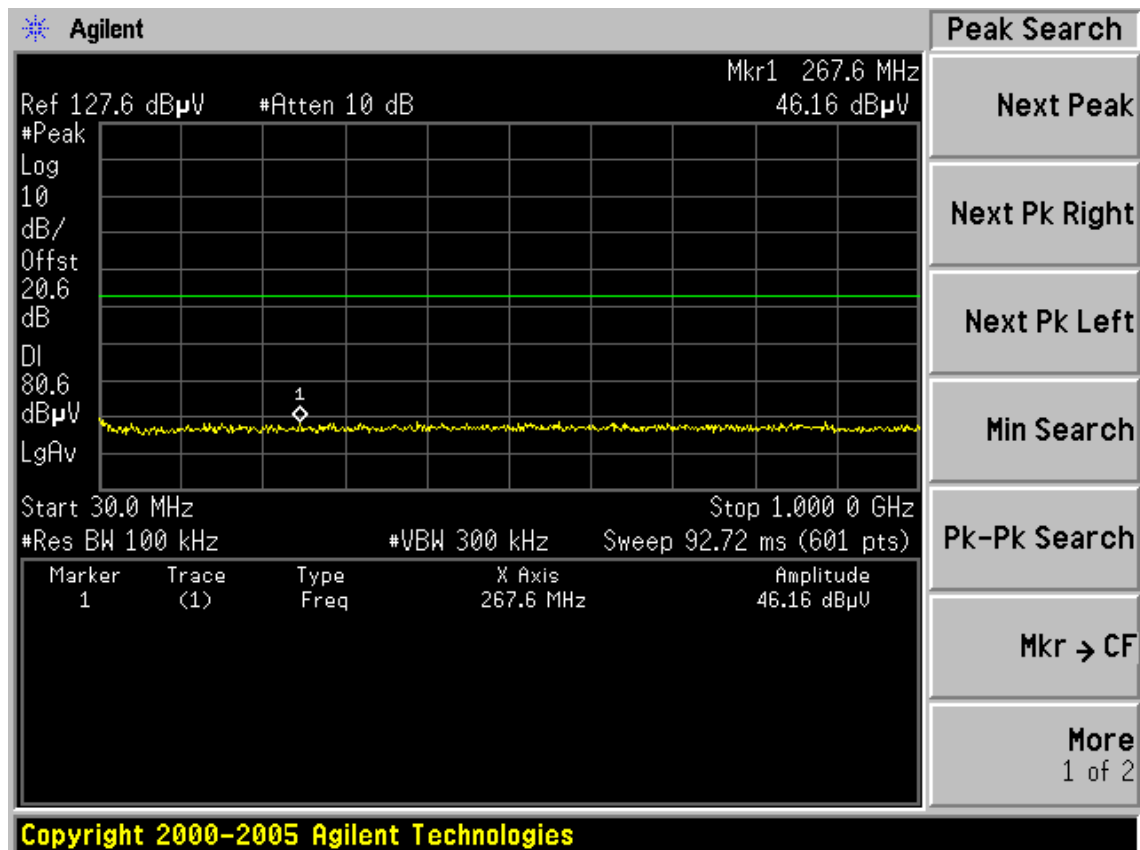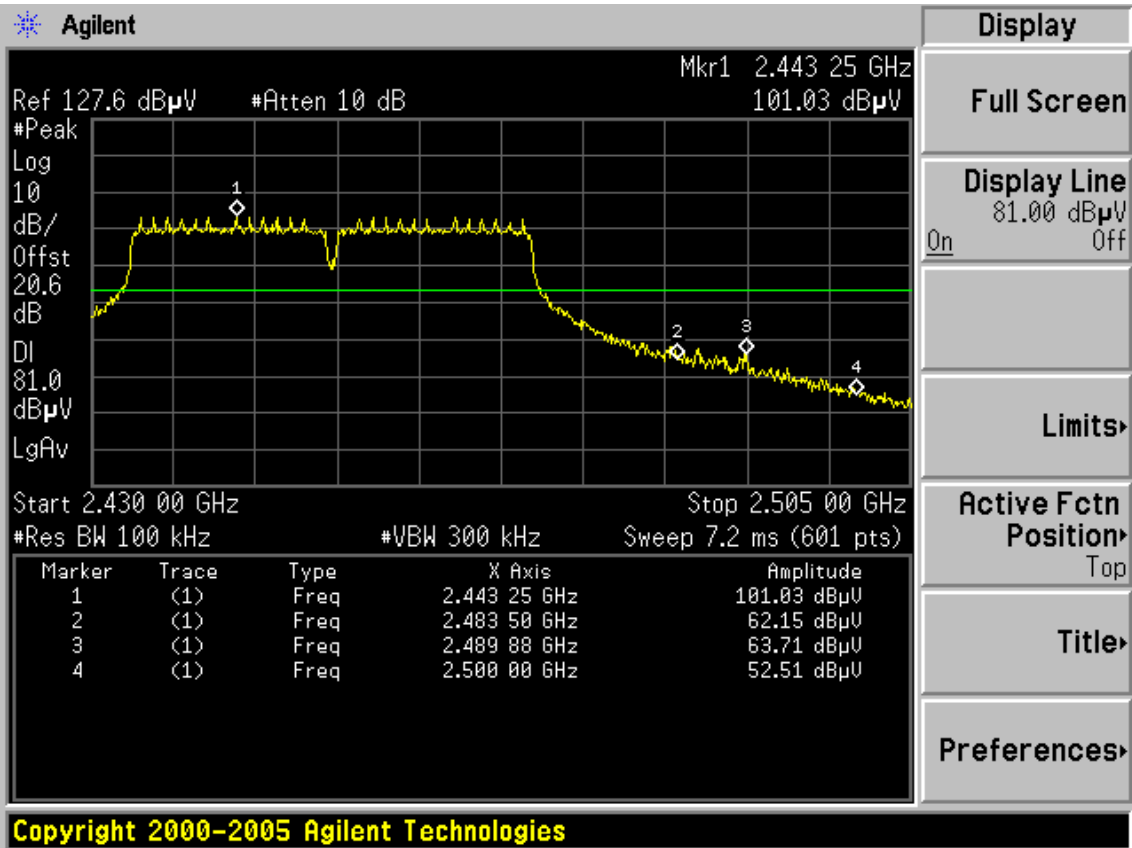

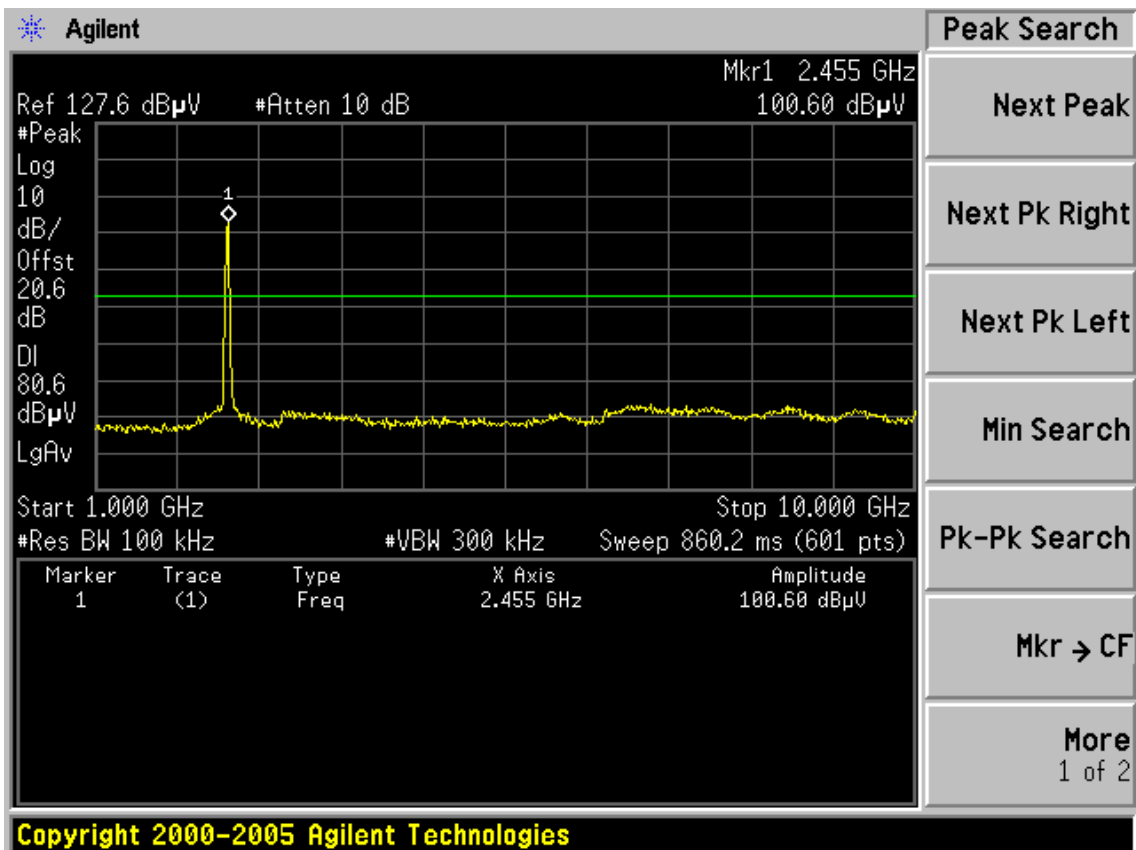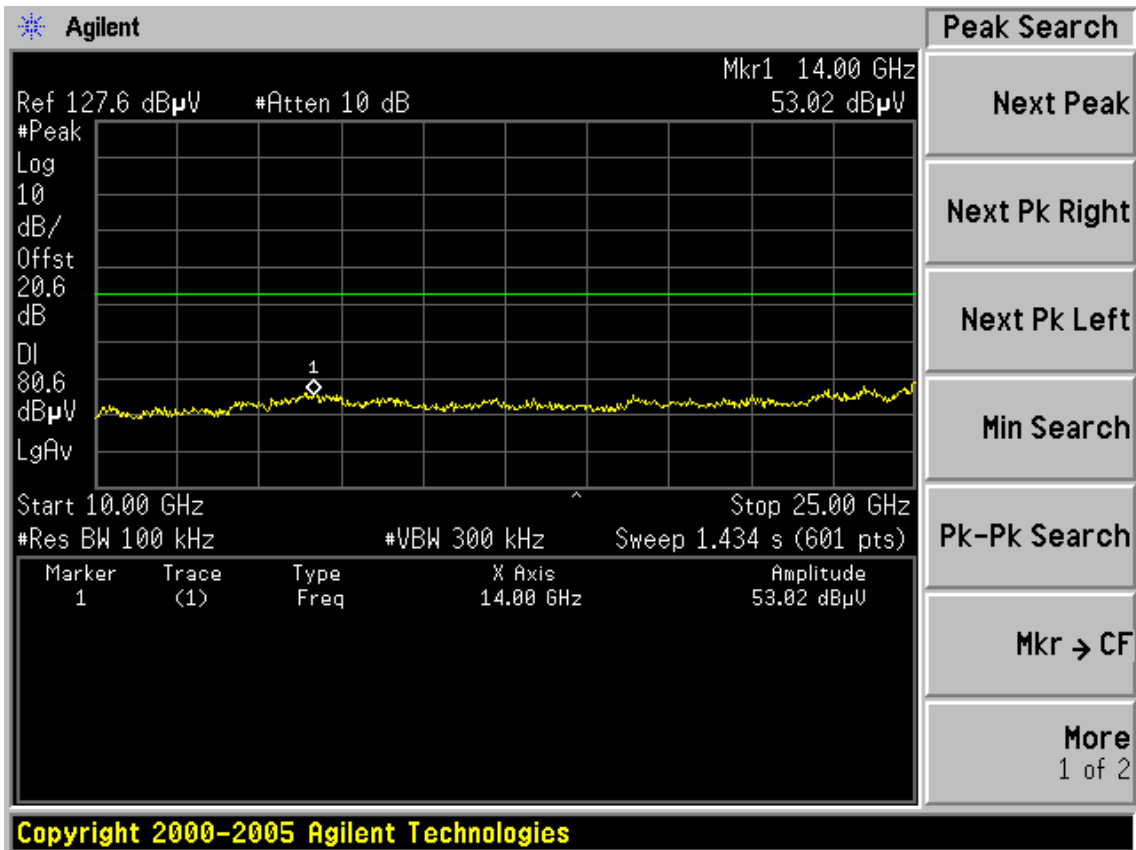

6. BAND EDGE COMPLIANCE TEST

6.1. Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|--------------|-------------|------------|------------|---------------|
| 1. | Spectrum Analyzer | Agilent | E4446A | US44300459 | May.08,11 | 1 Year |
| 2. | Horn Antenna | EMCO | 3115 | 9607-4877 | May 08, 11 | 1.5 Year |
| 3. | Amplifier | Agilent | 8449B | 3008A02495 | May.08, 11 | 1 Year |
| 4. | RF Cable | Hubersuhner | SUCOFLEX102 | 28620/2 | May.08,11 | 1 Year |
| 5. | RF Cable | Hubersuhner | SUCOFLEX102 | 28618/2 | May.08,11 | 1 Year |
| 6. | RF Cable | Hubersuhner | SUCOFLEX102 | 28610/2 | May.08,11 | 1 Year |

6.2. Limit


All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO

6.4. Test Results

Pass (The testing data was attached in the next pages.)

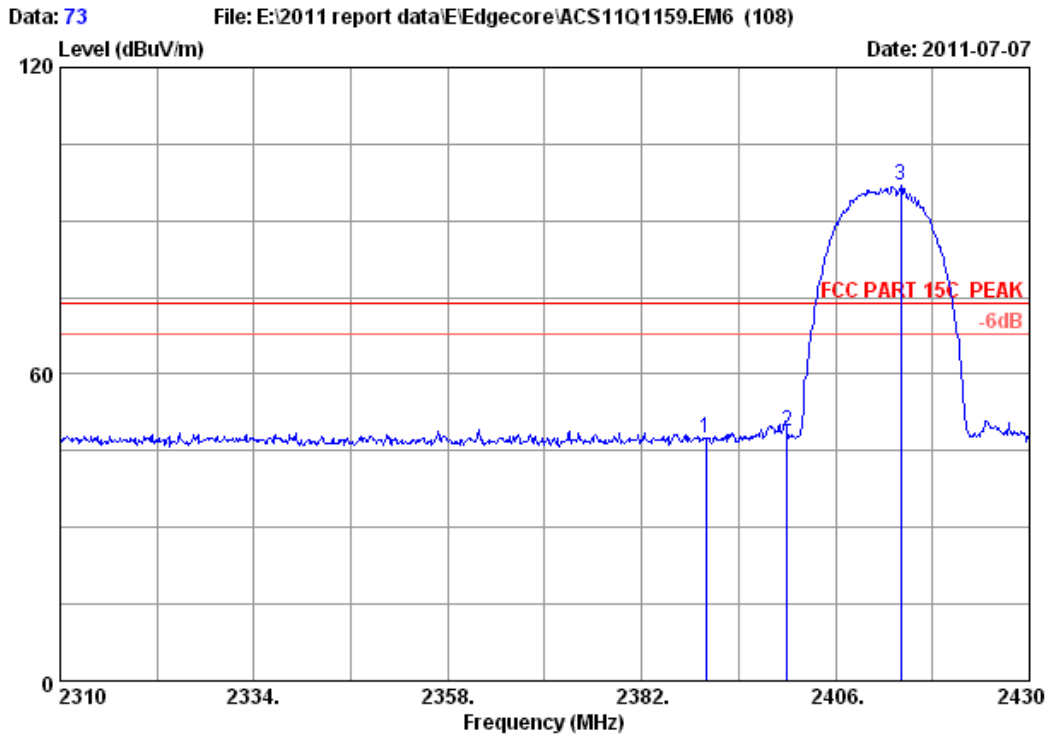


Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.000 | 29.44 | 7.39 | 36.62 | 47.32 | 47.53 | 74.00 | 26.47 | Peak |
| 2 | 2400.000 | 29.44 | 7.43 | 36.62 | 48.60 | 48.85 | 74.00 | 25.15 | Peak |
| 3 | 2414.040 | 29.45 | 7.43 | 36.62 | 96.55 | 96.81 | 74.00 | -22.81 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

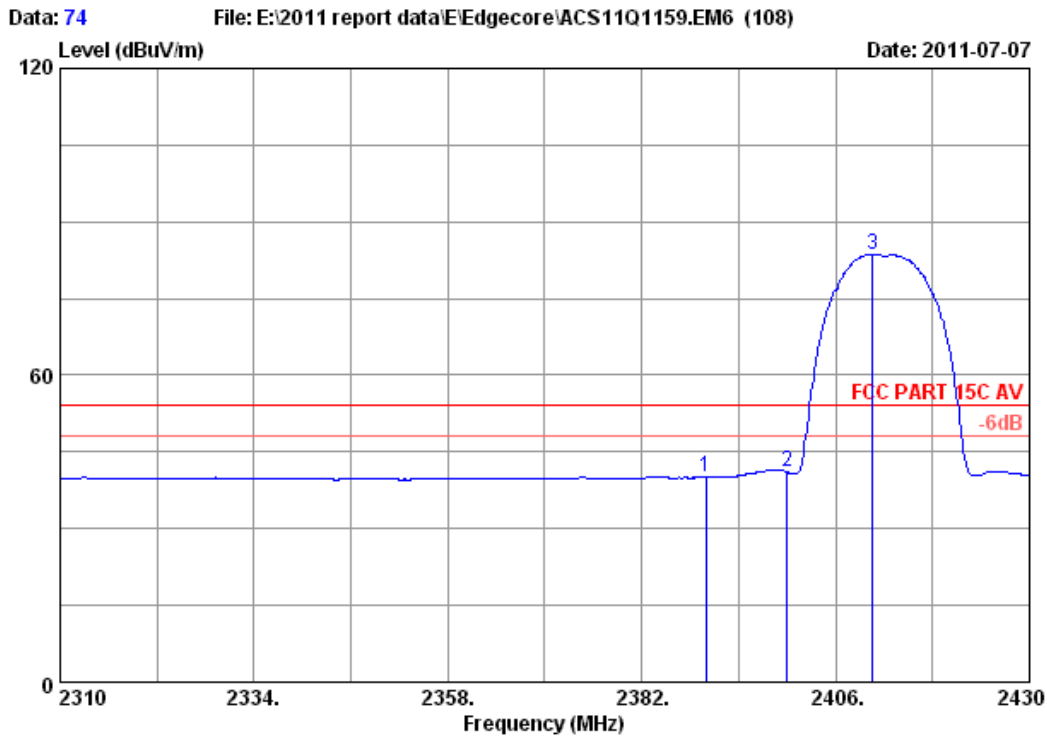


Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2390.000 | 29.44 | 7.39 | 36.62 | 39.79 | 40.00 | 54.00 | 14.00 | Average |
| 2 | 2400.000 | 29.44 | 7.43 | 36.62 | 40.81 | 41.06 | 54.00 | 12.94 | Average |
| 3 | 2410.560 | 29.45 | 7.43 | 36.62 | 83.43 | 83.69 | 54.00 | -29.69 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

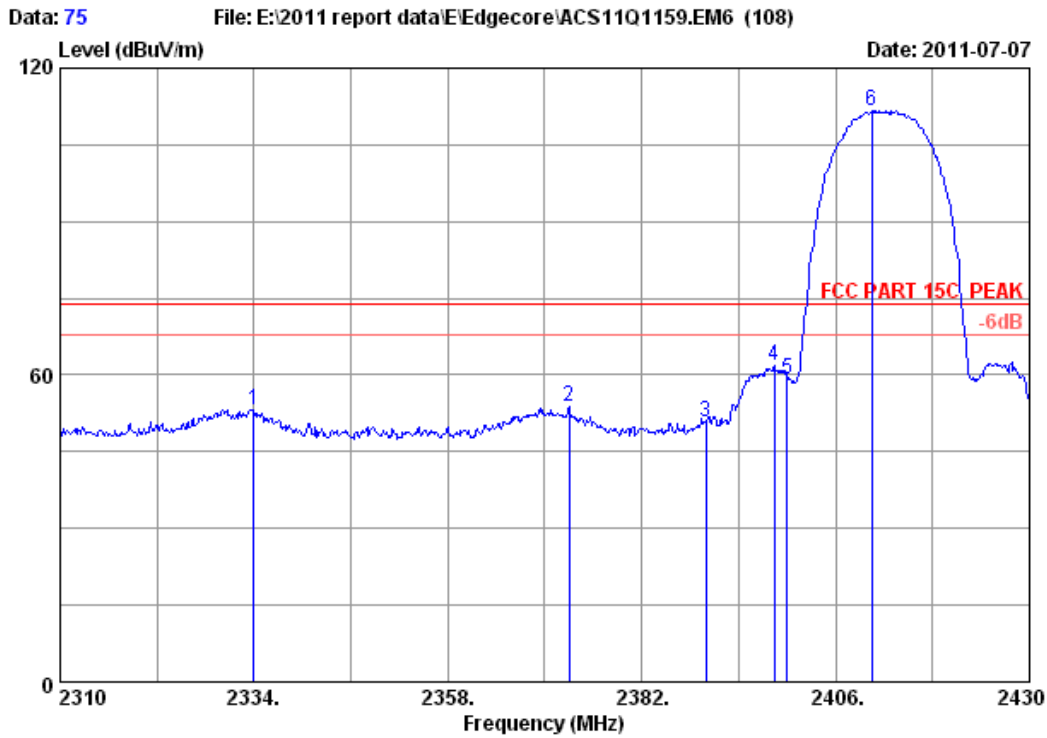


Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2334.000 | 29.40 | 7.27 | 36.63 | 53.21 | 53.25 | 74.00 | 20.75 | Peak |
| 2 | 2373.000 | 29.43 | 7.35 | 36.62 | 53.53 | 53.69 | 74.00 | 20.31 | Peak |
| 3 | 2390.000 | 29.44 | 7.39 | 36.62 | 50.46 | 50.67 | 74.00 | 23.33 | Peak |
| 4 | 2398.440 | 29.44 | 7.39 | 36.62 | 61.51 | 61.72 | 74.00 | 12.28 | Peak |
| 5 | 2400.000 | 29.44 | 7.43 | 36.62 | 58.84 | 59.09 | 74.00 | 14.91 | Peak |
| 6 | 2410.440 | 29.45 | 7.43 | 36.62 | 111.36 | 111.62 | 74.00 | -37.62 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

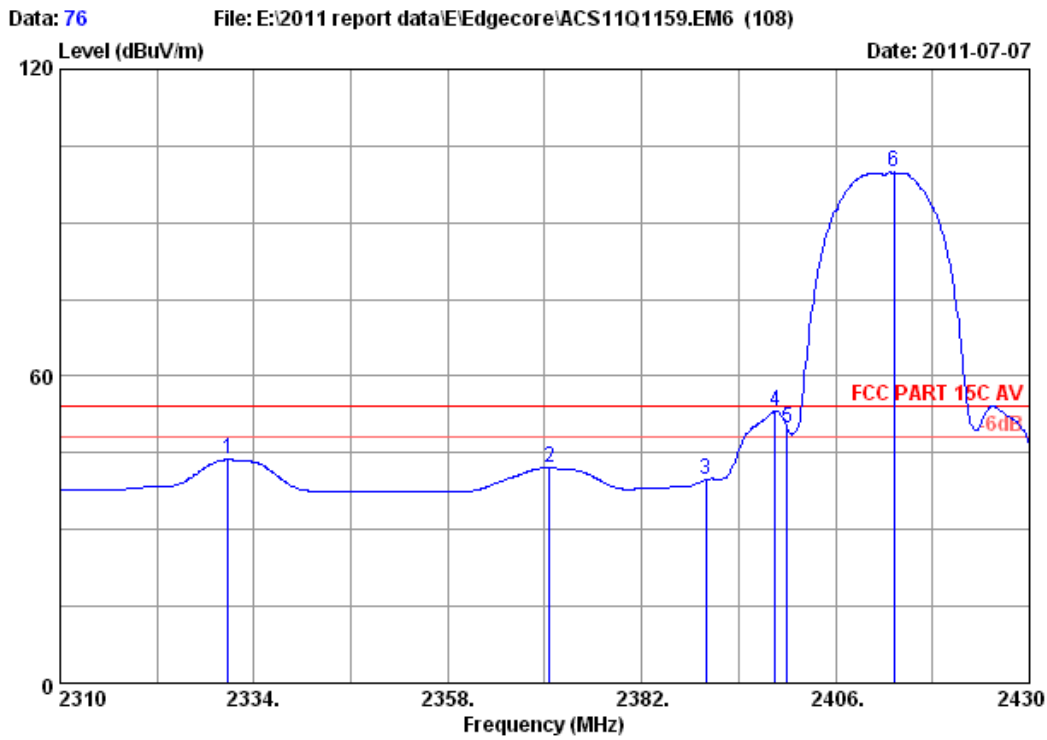


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2330.760 | 29.40 | 7.27 | 36.63 | 43.64 | 43.68 | 54.00 | 10.32 | Average |
| 2 | 2370.600 | 29.43 | 7.35 | 36.62 | 41.96 | 42.12 | 54.00 | 11.88 | Average |
| 3 | 2390.000 | 29.44 | 7.39 | 36.62 | 39.54 | 39.75 | 54.00 | 14.25 | Average |
| 4 | 2398.560 | 29.44 | 7.39 | 36.62 | 52.86 | 53.07 | 54.00 | 0.93 | Average |
| 5 | 2400.000 | 29.44 | 7.43 | 36.62 | 49.70 | 49.95 | 54.00 | 4.05 | Average |
| 6 | 2413.200 | 29.45 | 7.43 | 36.62 | 99.52 | 99.78 | 54.00 | -45.78 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

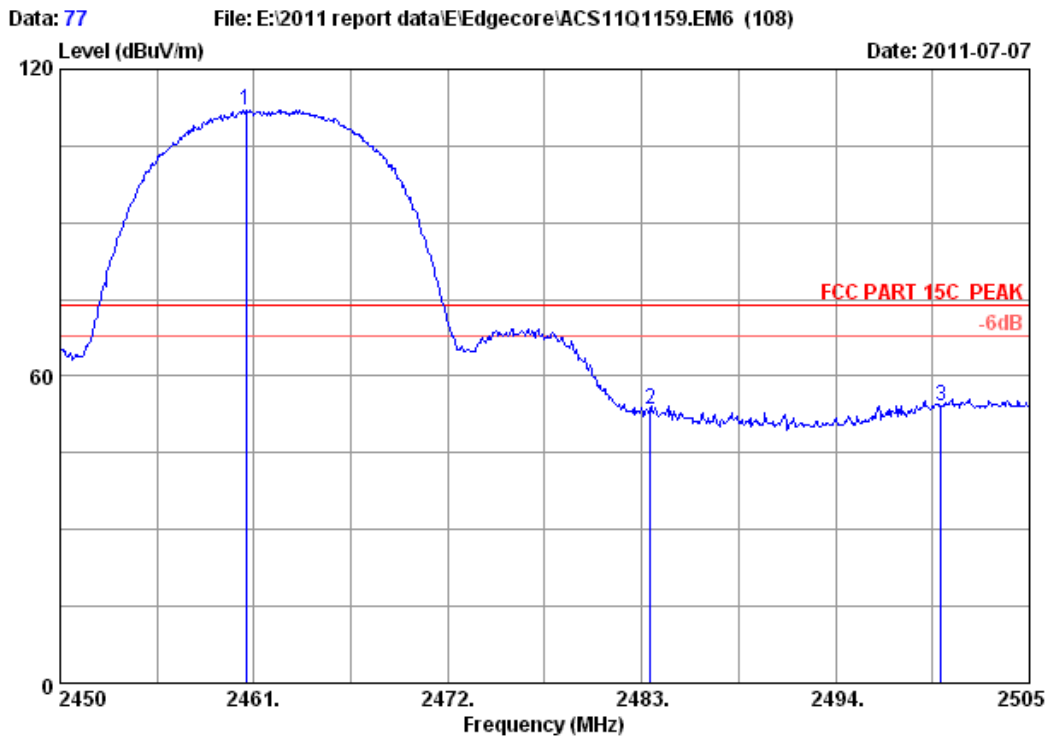


Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2460.560 | 29.48 | 7.54 | 36.61 | 111.65 | 112.06 | 74.00 | -38.06 | Peak |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 52.88 | 53.35 | 74.00 | 20.65 | Peak |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 53.58 | 54.10 | 74.00 | 19.90 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

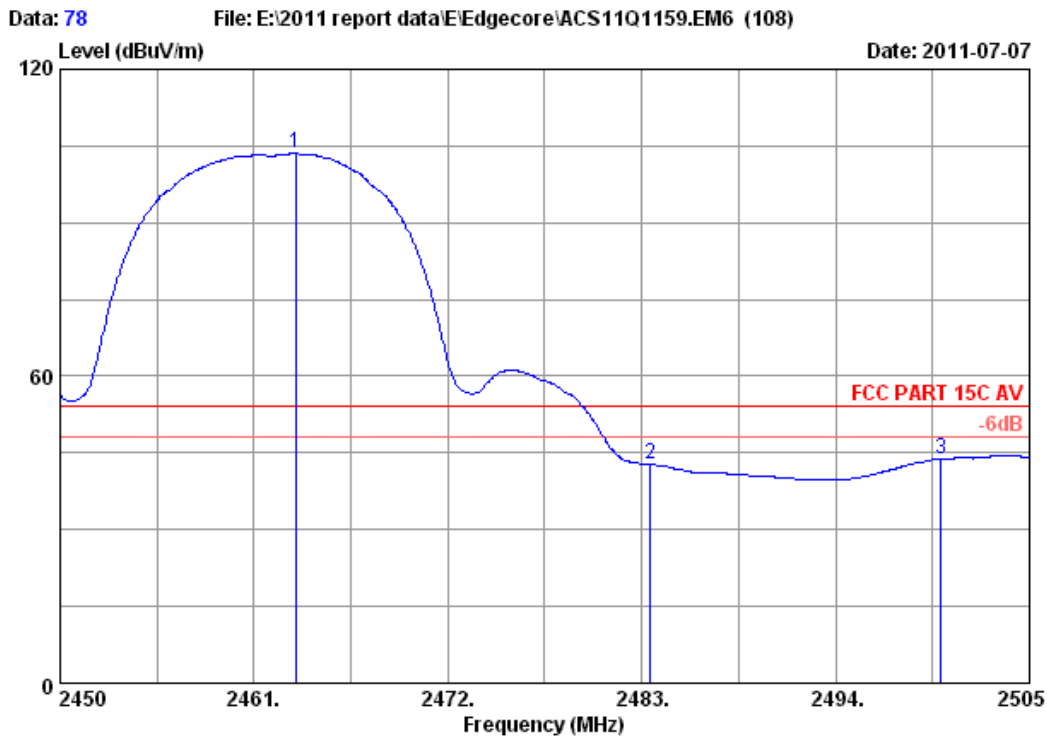


Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2463.365 | 29.48 | 7.54 | 36.61 | 103.12 | 103.53 | 54.00 | -49.53 | Average |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 42.28 | 42.75 | 54.00 | 11.25 | Average |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 43.30 | 43.82 | 54.00 | 10.18 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

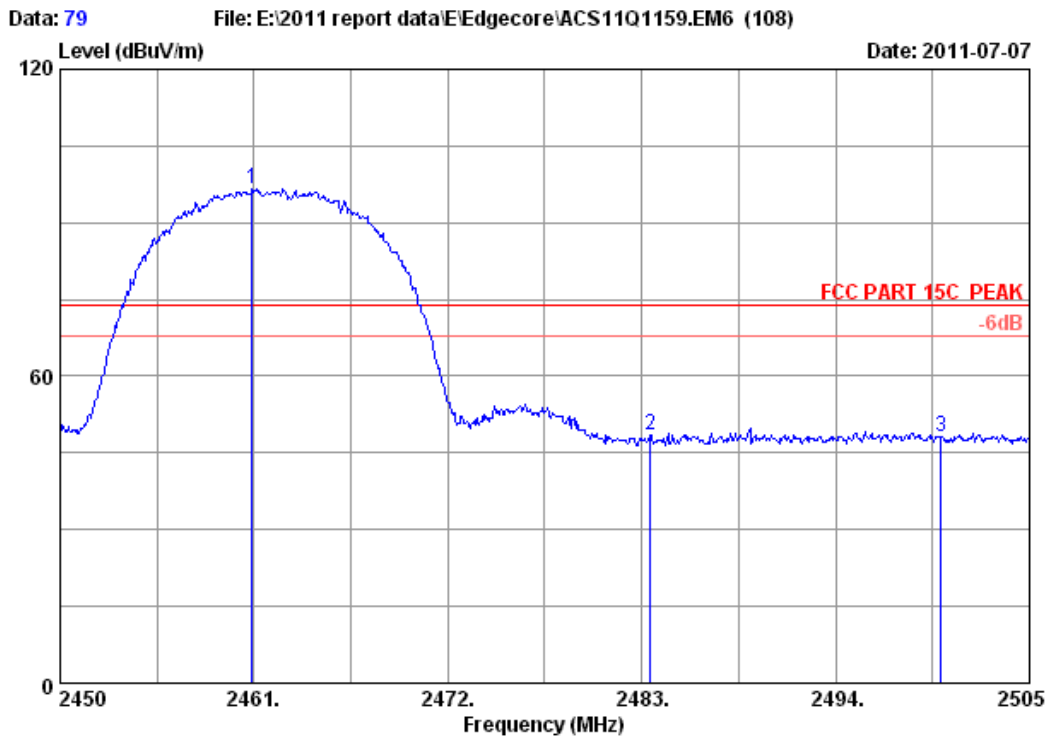


Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2460.890 | 29.48 | 7.54 | 36.61 | 96.20 | 96.61 | 74.00 | -22.61 | Peak |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 47.94 | 48.41 | 74.00 | 25.59 | Peak |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 47.74 | 48.26 | 74.00 | 25.74 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

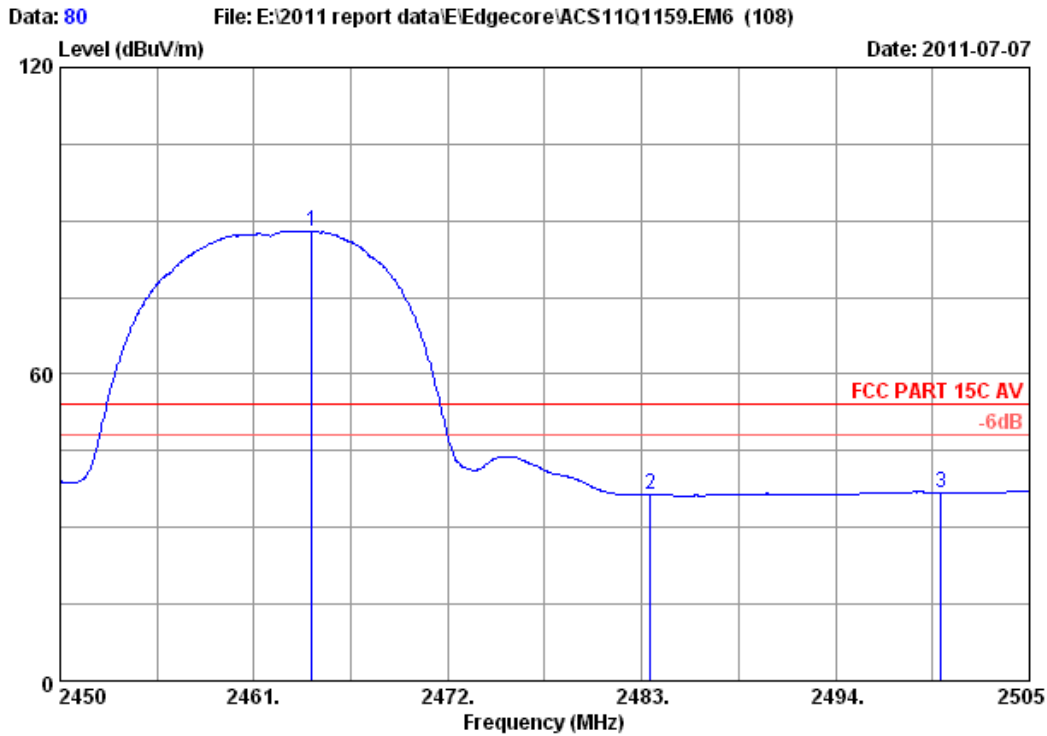


Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11b CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2464.300 | 29.48 | 7.54 | 36.61 | 87.64 | 88.05 | 54.00 | -34.05 | Average |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 35.93 | 36.40 | 54.00 | 17.60 | Average |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 36.28 | 36.80 | 54.00 | 17.20 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

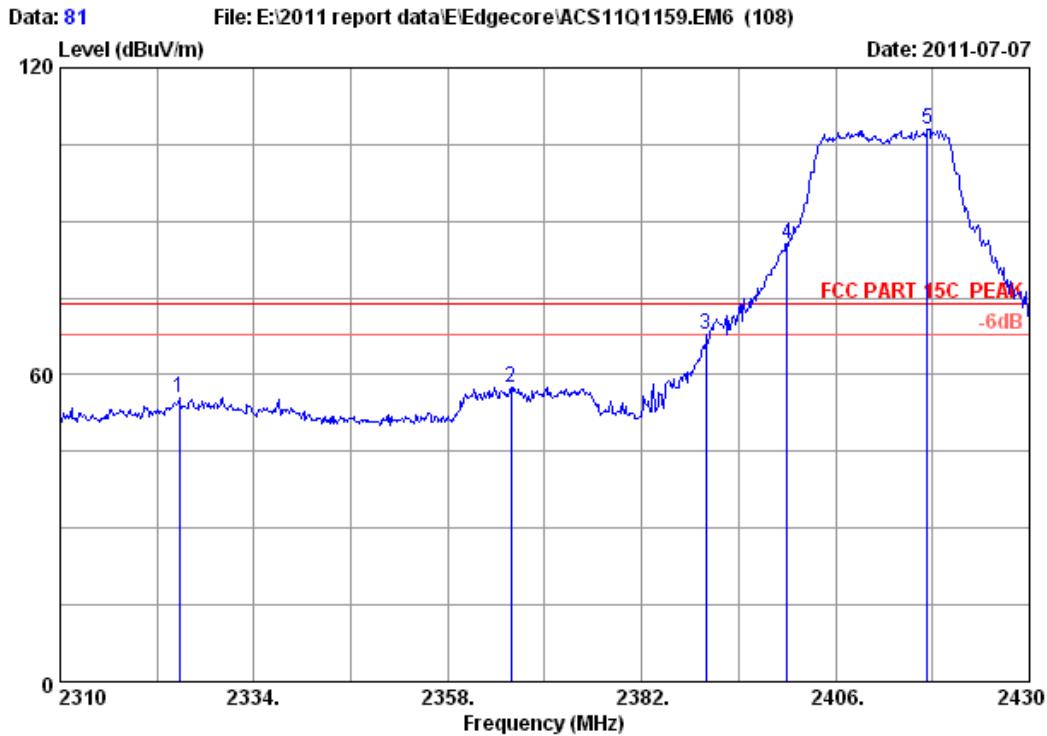


Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2324.760 | 29.40 | 7.27 | 36.63 | 55.52 | 55.56 | 74.00 | 18.44 | Peak |
| 2 | 2365.800 | 29.42 | 7.35 | 36.62 | 57.47 | 57.62 | 74.00 | 16.38 | Peak |
| 3 | 2390.000 | 29.44 | 7.39 | 36.62 | 67.60 | 67.81 | 74.00 | 6.19 | Peak |
| 4 | 2400.000 | 29.44 | 7.43 | 36.62 | 85.27 | 85.52 | 74.00 | -11.52 | Peak |
| 5 | 2417.400 | 29.45 | 7.43 | 36.61 | 107.80 | 108.07 | 74.00 | -34.07 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

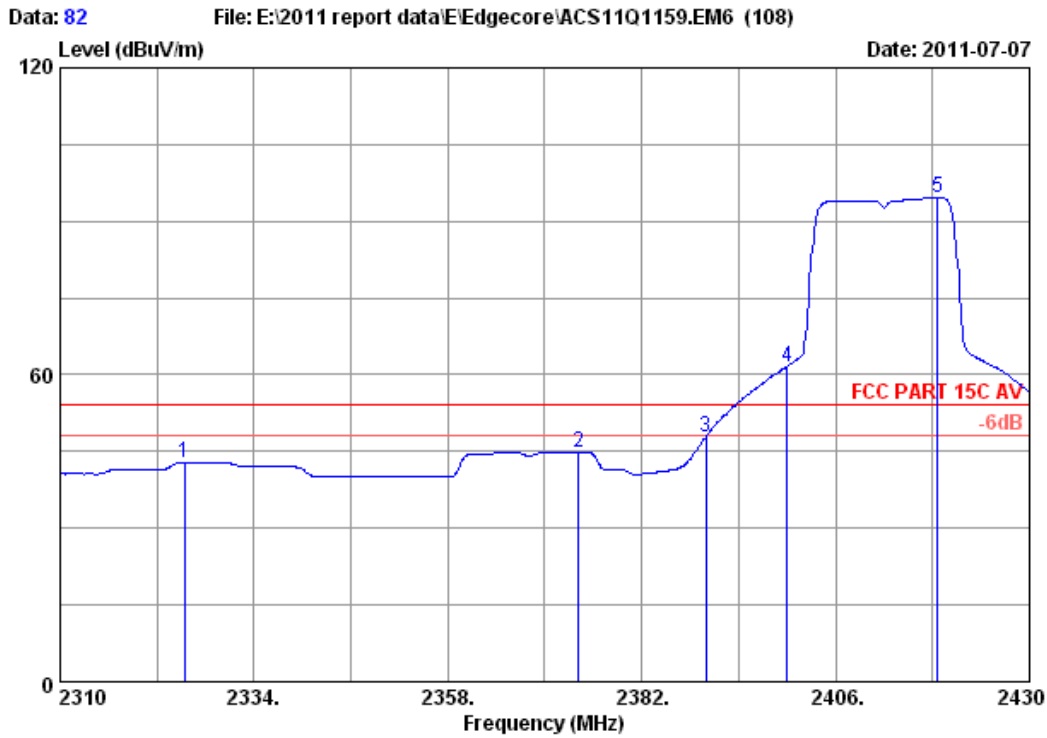


Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1 | 2325.360 | 29.40 | 7.27 | 36.63 | 42.77 | 42.81 | 54.00 | 11.19 | Average |
| 2 | 2374.200 | 29.43 | 7.35 | 36.62 | 44.78 | 44.94 | 54.00 | 9.06 | Average |
| 3 | 2390.000 | 29.44 | 7.39 | 36.62 | 47.72 | 47.93 | 54.00 | 6.07 | Average |
| 4 | 2400.000 | 29.44 | 7.43 | 36.62 | 61.42 | 61.67 | 54.00 | -7.67 | Average |
| 5 | 2418.600 | 29.45 | 7.43 | 36.61 | 94.31 | 94.58 | 54.00 | -40.58 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

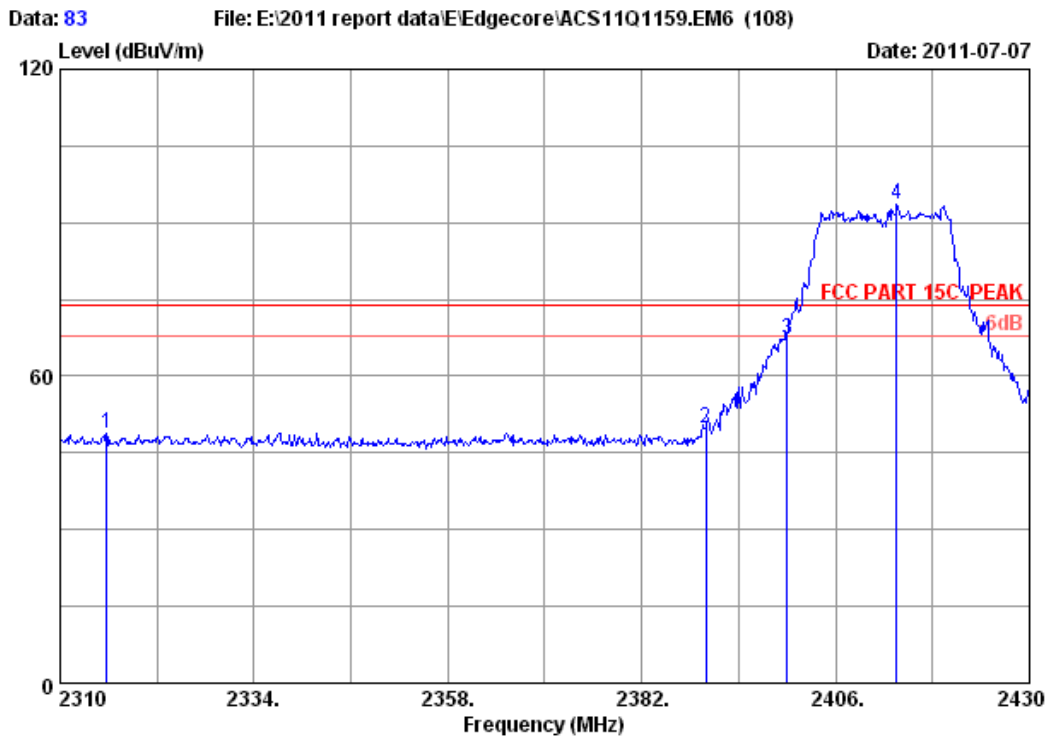


Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2315.760 | 29.39 | 7.24 | 36.63 | 48.97 | 48.97 | 74.00 | 25.03 | Peak |
| 2 | 2390.000 | 29.44 | 7.39 | 36.62 | 49.44 | 49.65 | 74.00 | 24.35 | Peak |
| 3 | 2400.000 | 29.44 | 7.43 | 36.62 | 66.97 | 67.22 | 74.00 | 6.78 | Peak |
| 4 | 2413.560 | 29.45 | 7.43 | 36.62 | 93.21 | 93.47 | 74.00 | -19.47 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

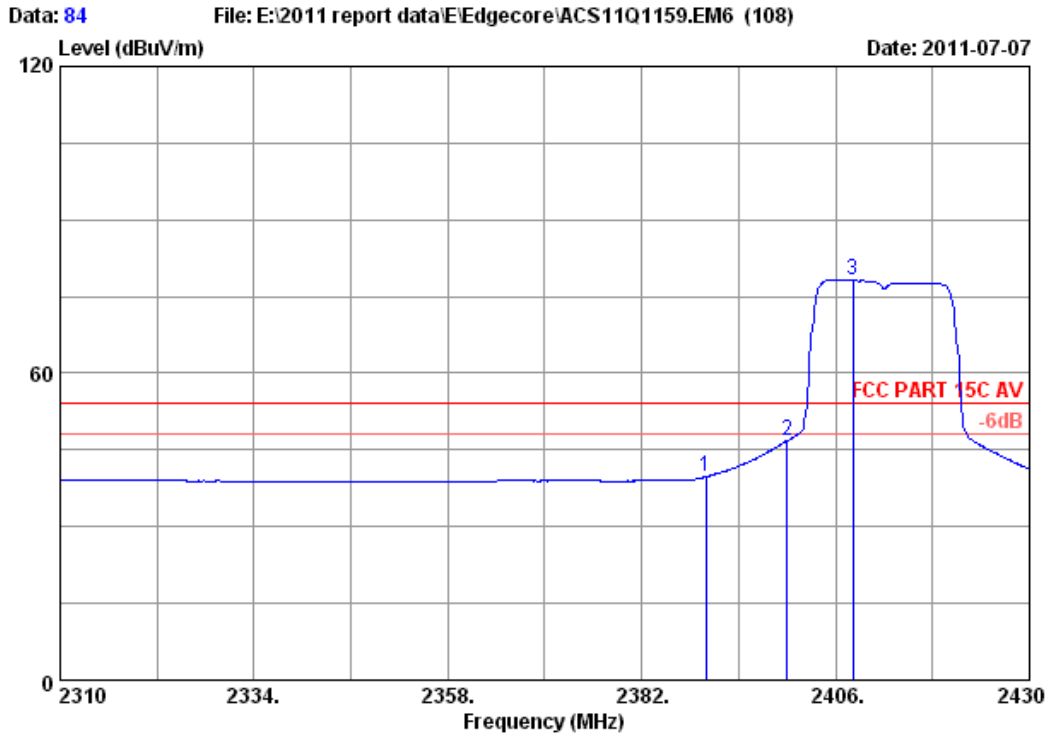


Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2390.000 | 29.44 | 7.39 | 36.62 | 39.54 | 39.75 | 54.00 | 14.25 | Average |
| 2 | 2400.000 | 29.44 | 7.43 | 36.62 | 46.54 | 46.79 | 54.00 | 7.21 | Average |
| 3 | 2408.160 | 29.45 | 7.43 | 36.62 | 77.91 | 78.17 | 54.00 | -24.17 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

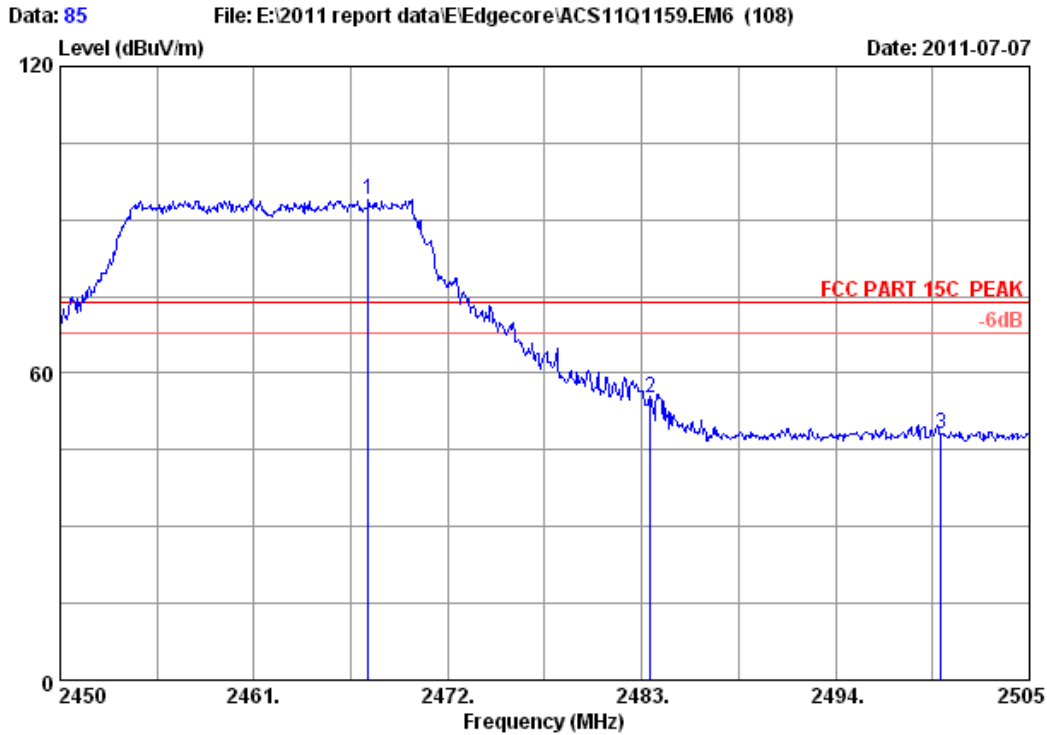


Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2467.490 | 29.48 | 7.54 | 36.60 | 93.54 | 93.96 | 74.00 | -19.96 | Peak |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 54.68 | 55.15 | 74.00 | 18.85 | Peak |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 47.48 | 48.00 | 74.00 | 26.00 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

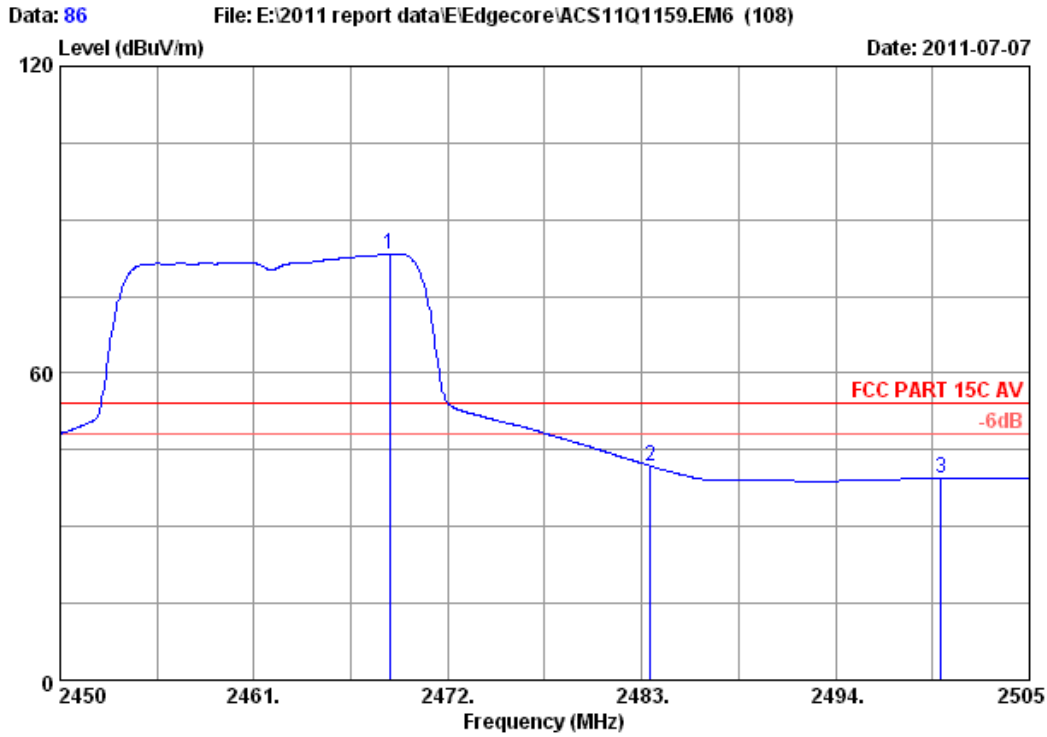


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2468.700 | 29.48 | 7.54 | 36.60 | 82.80 | 83.22 | 54.00 | -29.22 | Average |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 41.37 | 41.84 | 54.00 | 12.16 | Average |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 38.88 | 39.40 | 54.00 | 14.60 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

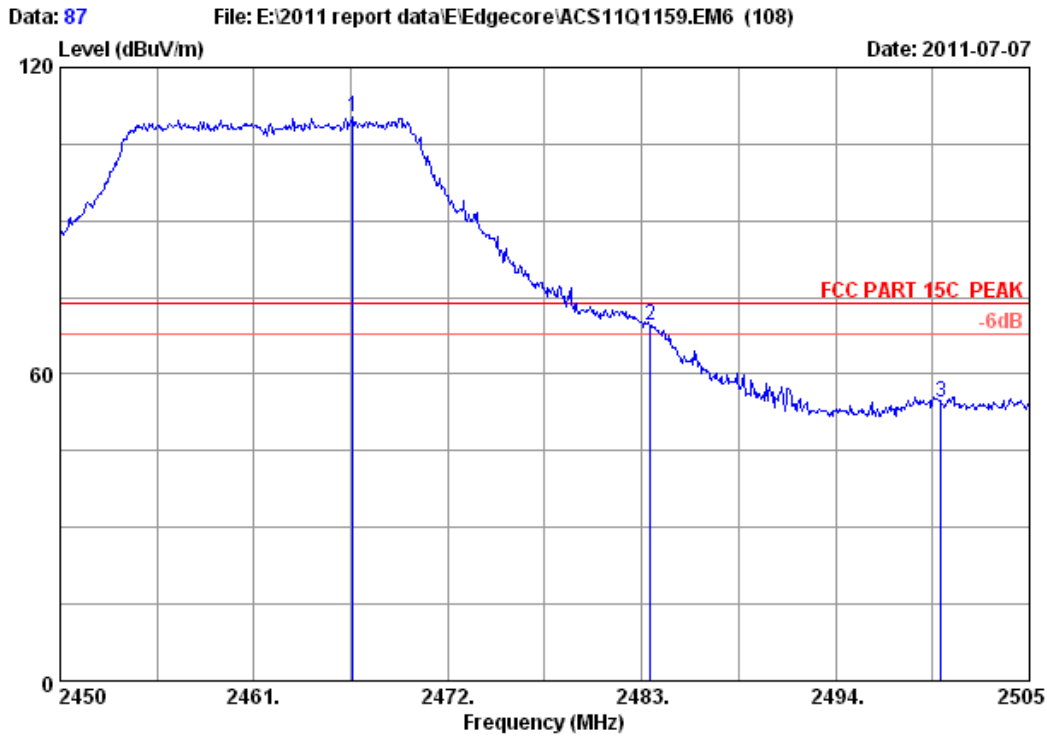


Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|----------------|--------------------------|-----------------------|------------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1 | 2466.610 | 29.48 | 7.54 | 36.60 | 109.83 | 110.25 | 74.00 | -36.25 | Peak |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 68.96 | 69.43 | 74.00 | 4.57 | Peak |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 53.92 | 54.44 | 74.00 | 19.56 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

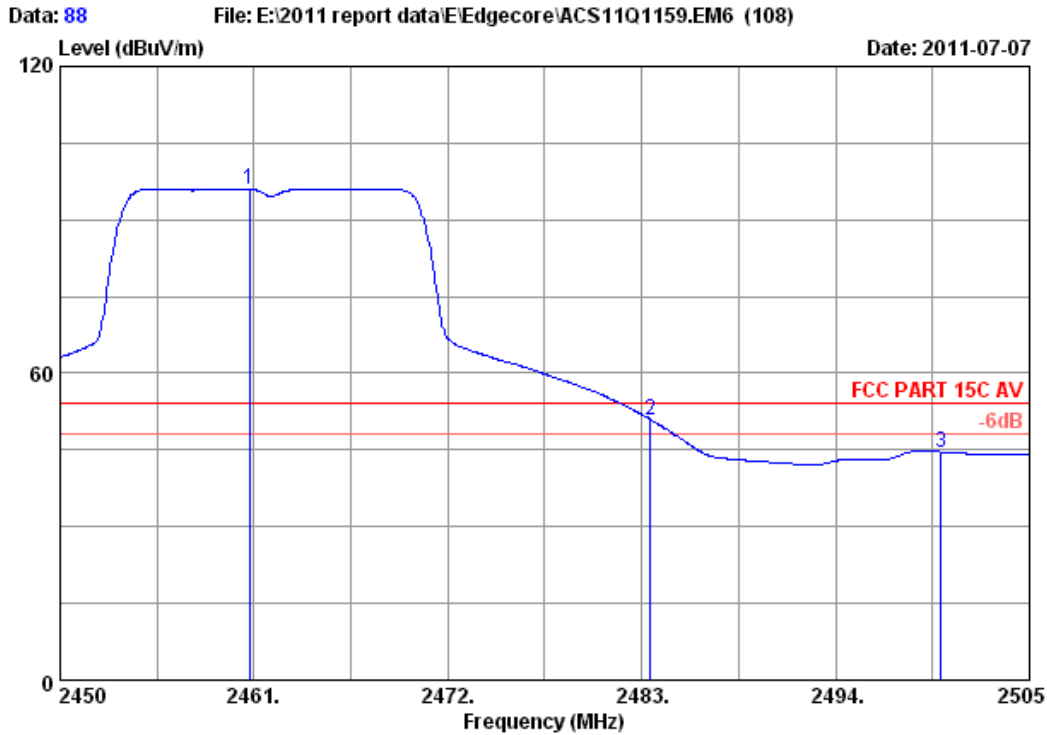


Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11g CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2460.725 | 29.48 | 7.54 | 36.61 | 95.54 | 95.95 | 54.00 | -41.95 | Average |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 50.47 | 50.94 | 54.00 | 3.06 | Average |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 44.09 | 44.61 | 54.00 | 9.39 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

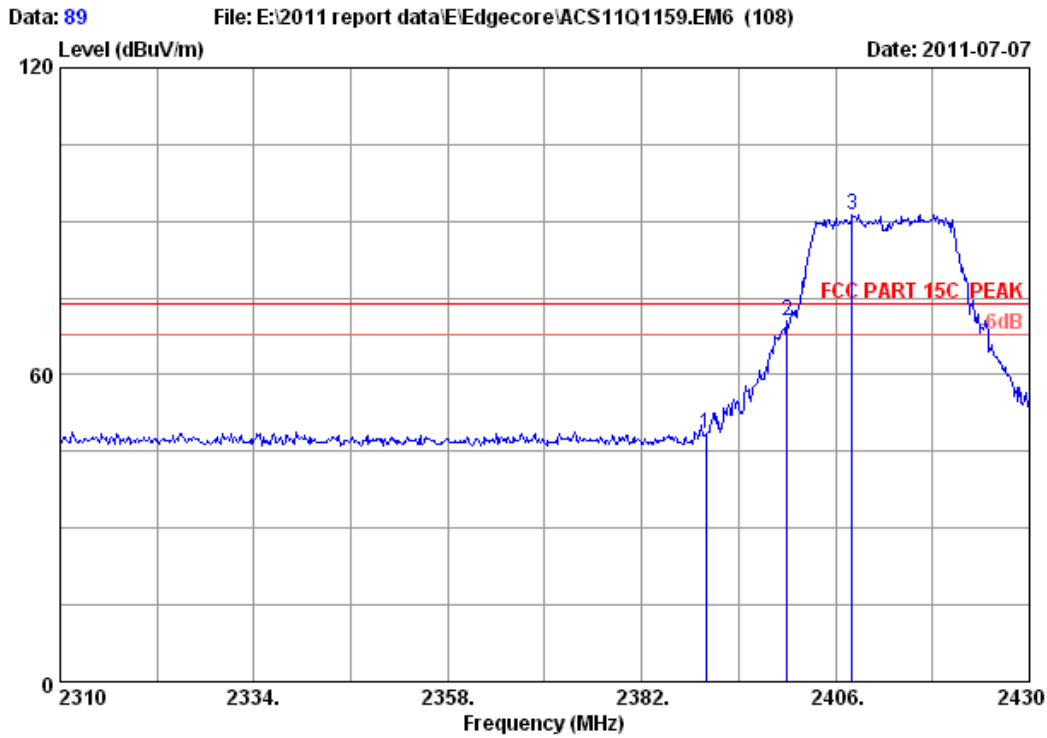


Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.000 | 29.44 | 7.39 | 36.62 | 48.39 | 48.60 | 74.00 | 25.40 | Peak |
| 2 | 2400.000 | 29.44 | 7.43 | 36.62 | 70.22 | 70.47 | 74.00 | 3.53 | Peak |
| 3 | 2408.040 | 29.45 | 7.43 | 36.62 | 90.93 | 91.19 | 74.00 | -17.19 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

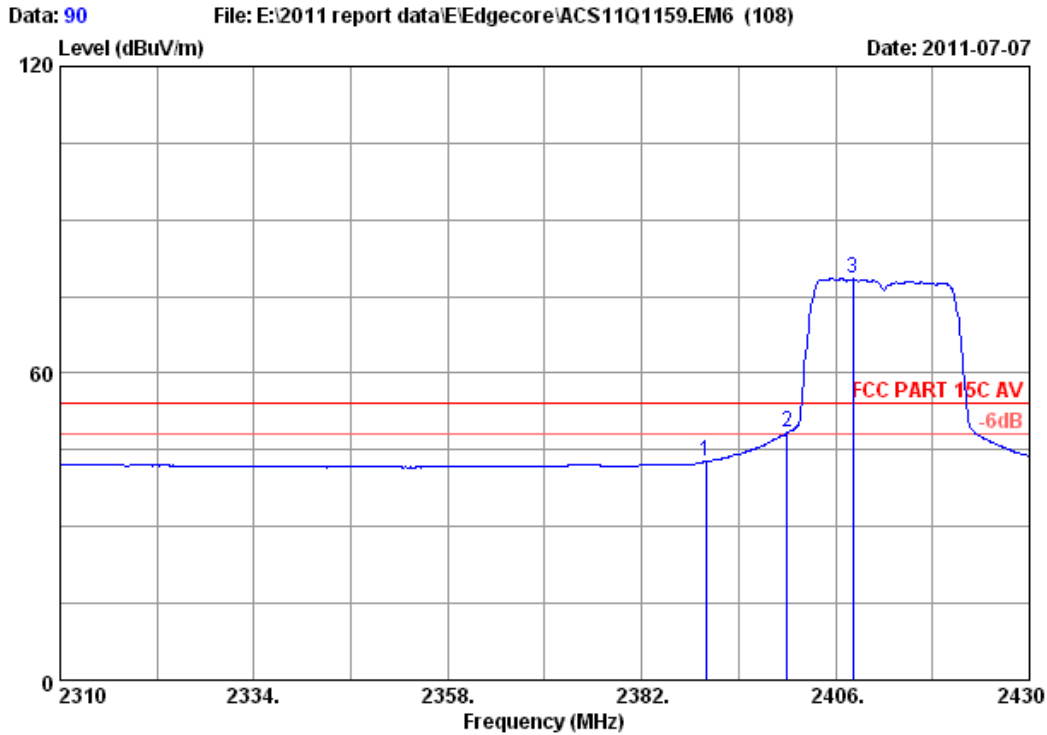


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2390.000 | 29.44 | 7.39 | 36.62 | 42.51 | 42.72 | 54.00 | 11.28 | Average |
| 2 | 2400.000 | 29.44 | 7.43 | 36.62 | 48.11 | 48.36 | 54.00 | 5.64 | Average |
| 3 | 2408.160 | 29.45 | 7.43 | 36.62 | 78.16 | 78.42 | 54.00 | -24.42 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

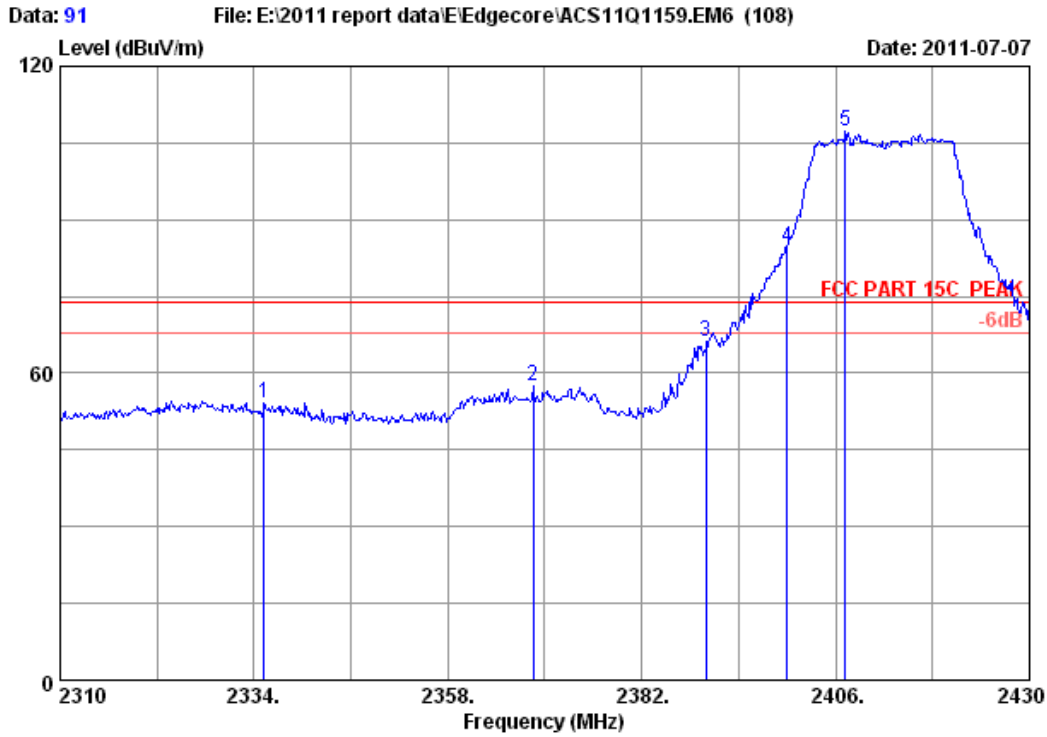


Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2335.200 | 29.41 | 7.27 | 36.63 | 54.25 | 54.30 | 74.00 | 19.70 | Peak |
| 2 | 2368.560 | 29.43 | 7.35 | 36.62 | 57.17 | 57.33 | 74.00 | 16.67 | Peak |
| 3 | 2390.000 | 29.44 | 7.39 | 36.62 | 65.93 | 66.14 | 74.00 | 7.86 | Peak |
| 4 | 2400.000 | 29.44 | 7.43 | 36.62 | 84.20 | 84.45 | 74.00 | -10.45 | Peak |
| 5 | 2407.200 | 29.45 | 7.43 | 36.62 | 107.01 | 107.27 | 74.00 | -33.27 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

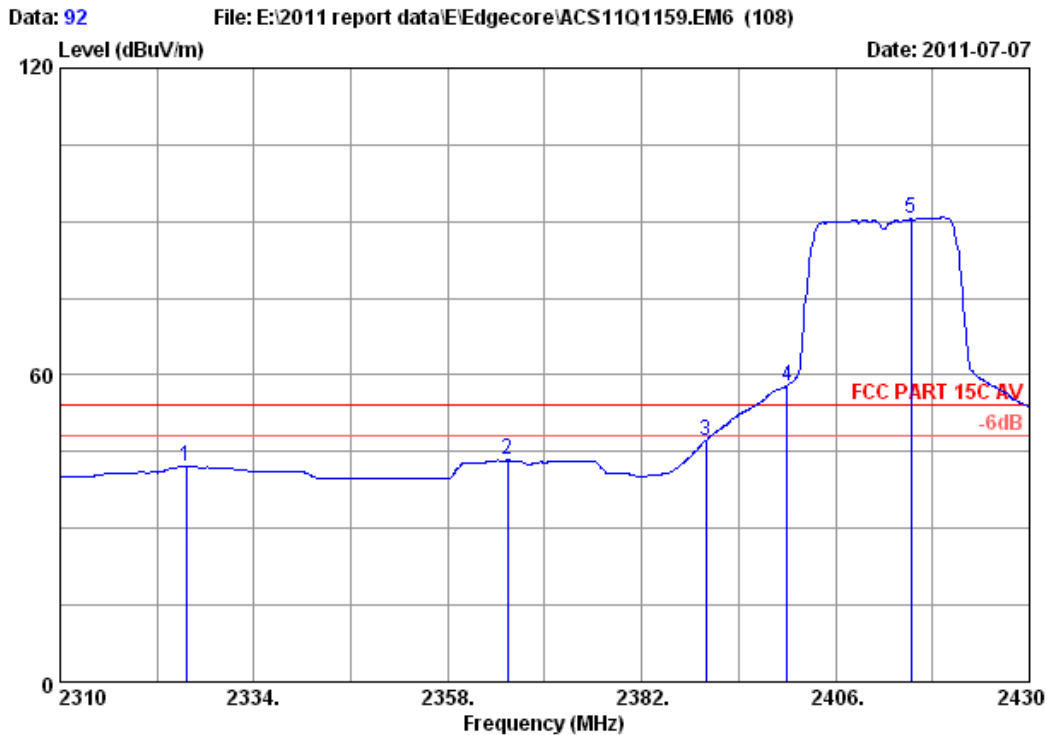


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2325.600 | 29.40 | 7.27 | 36.63 | 41.96 | 42.00 | 54.00 | 12.00 | Average |
| 2 | 2365.440 | 29.42 | 7.35 | 36.62 | 43.15 | 43.30 | 54.00 | 10.70 | Average |
| 3 | 2390.000 | 29.44 | 7.39 | 36.62 | 47.07 | 47.28 | 54.00 | 6.72 | Average |
| 4 | 2400.000 | 29.44 | 7.43 | 36.62 | 57.72 | 57.97 | 54.00 | -3.97 | Average |
| 5 | 2415.360 | 29.45 | 7.43 | 36.61 | 90.18 | 90.45 | 54.00 | -36.45 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

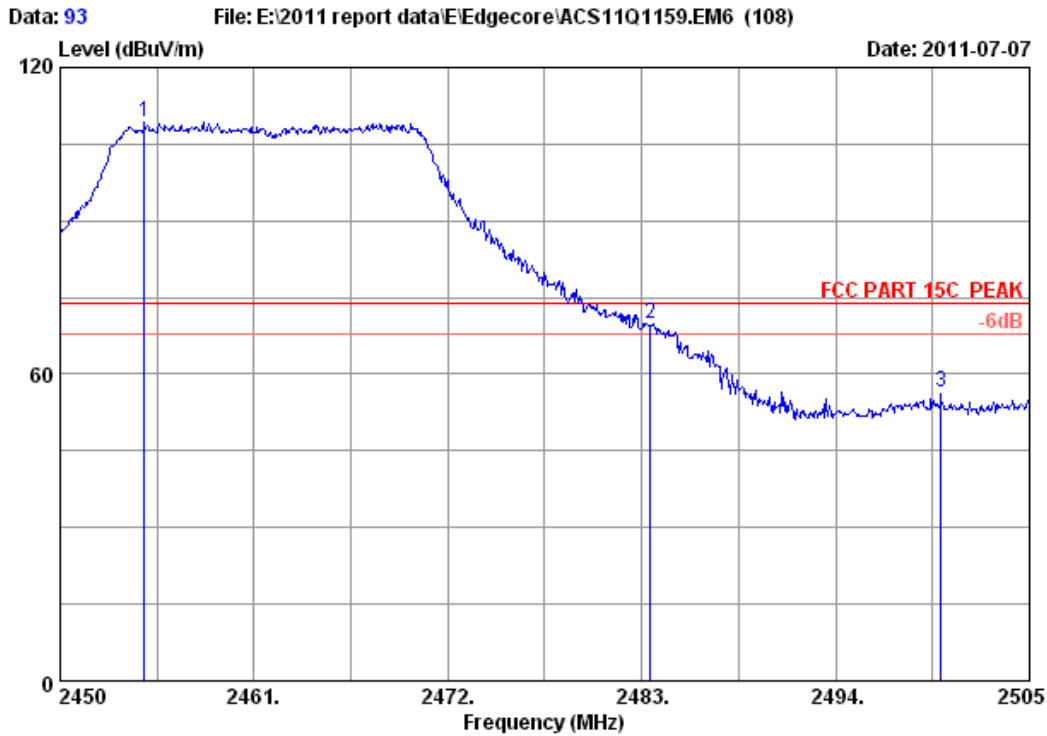


Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2454.785 | 29.48 | 7.50 | 36.61 | 109.09 | 109.46 | 74.00 | -35.46 | Peak |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 69.40 | 69.87 | 74.00 | 4.13 | Peak |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 55.91 | 56.43 | 74.00 | 17.57 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

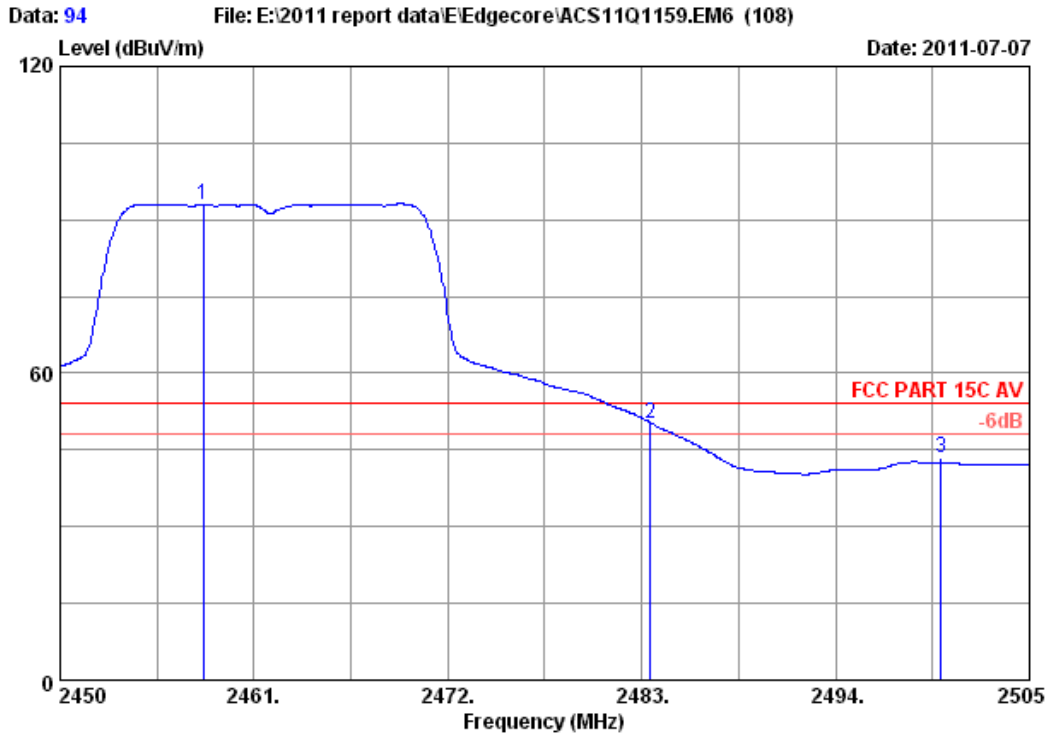


Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2458.140 | 29.48 | 7.50 | 36.61 | 92.71 | 93.08 | 54.00 | -39.08 | Average |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 49.80 | 50.27 | 54.00 | 3.73 | Average |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 42.90 | 43.42 | 54.00 | 10.58 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

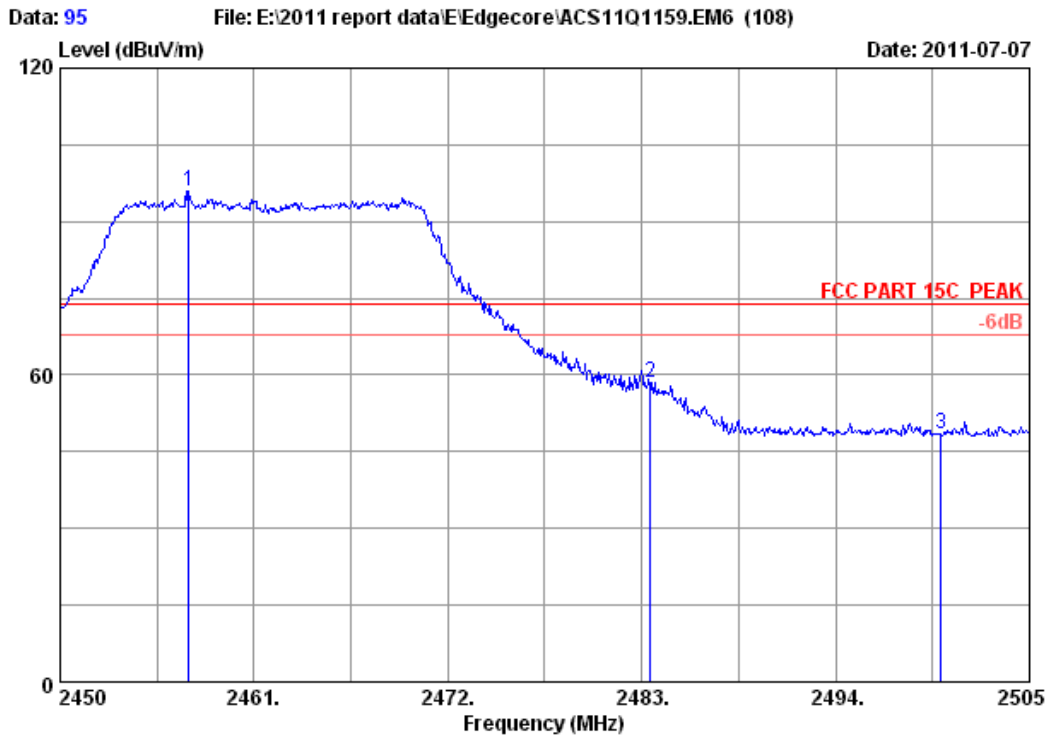


Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2457.315 | 29.48 | 7.50 | 36.61 | 95.46 | 95.83 | 74.00 | -21.83 | Peak |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 58.14 | 58.61 | 74.00 | 15.39 | Peak |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 47.79 | 48.31 | 74.00 | 25.69 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

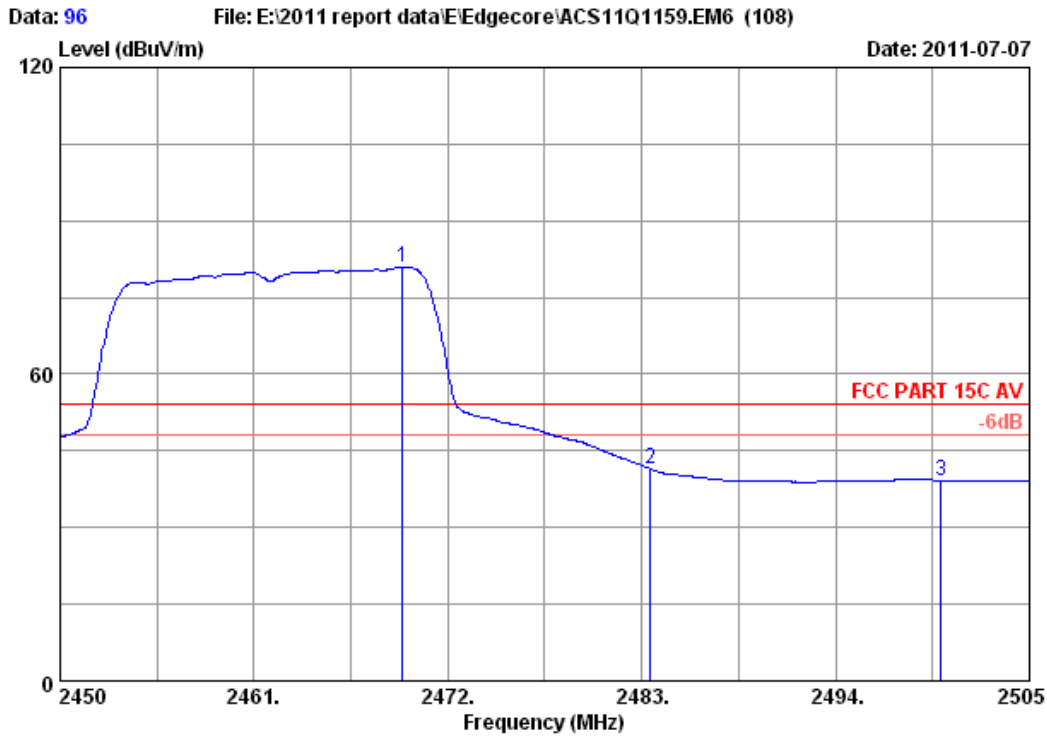


Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2469.415 | 29.48 | 7.54 | 36.60 | 80.55 | 80.97 | 54.00 | -26.97 | Average |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 40.99 | 41.46 | 54.00 | 12.54 | Average |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 38.62 | 39.14 | 54.00 | 14.86 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

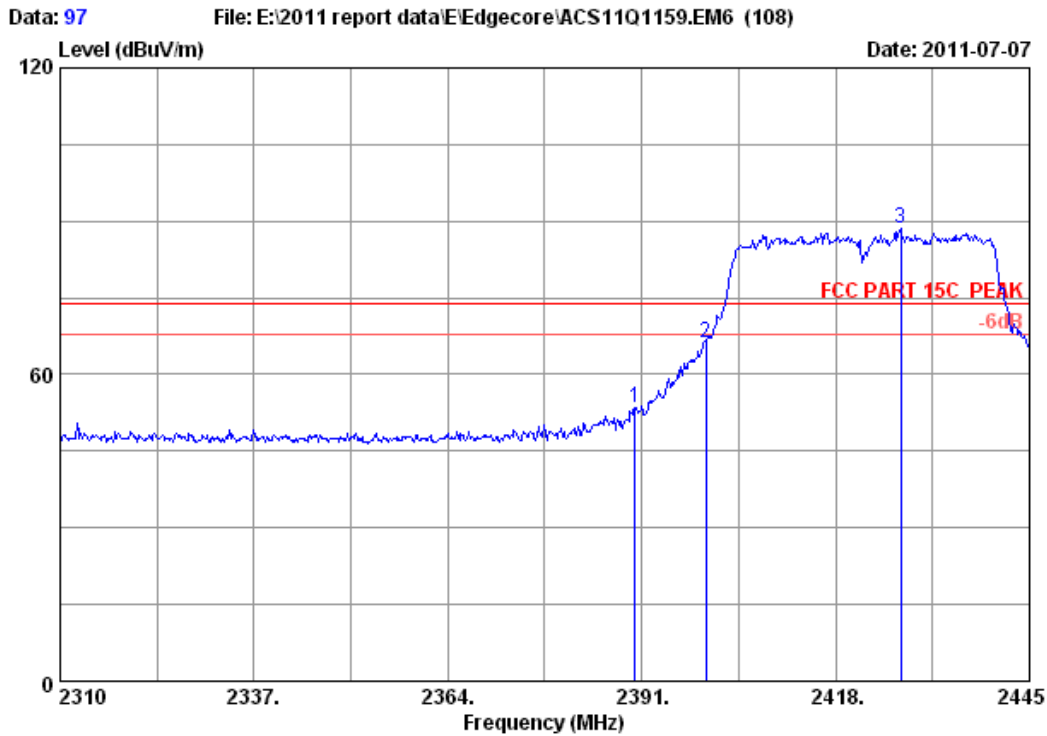


Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.000 | 29.44 | 7.39 | 36.62 | 53.32 | 53.53 | 74.00 | 20.47 | Peak |
| 2 | 2400.000 | 29.44 | 7.43 | 36.62 | 65.95 | 66.20 | 74.00 | 7.80 | Peak |
| 3 | 2427.045 | 29.46 | 7.46 | 36.61 | 88.15 | 88.46 | 74.00 | -14.46 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

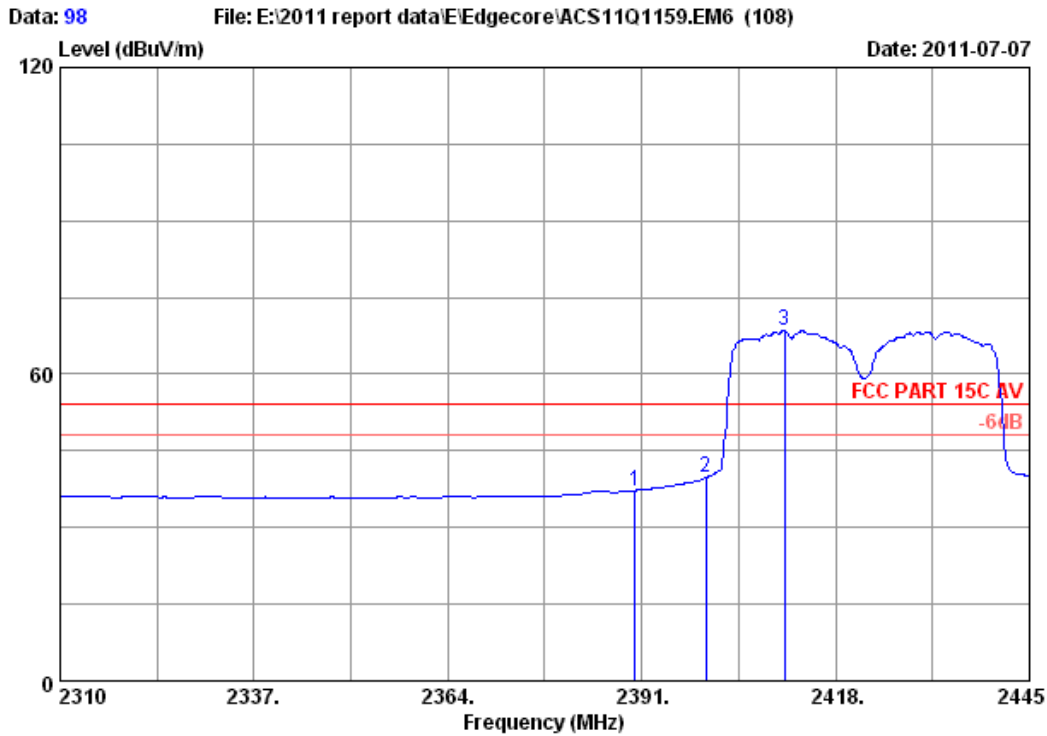


Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2390.000 | 29.44 | 7.39 | 36.62 | 37.05 | 37.26 | 54.00 | 16.74 | Average |
| 2 | 2400.000 | 29.44 | 7.43 | 36.62 | 39.54 | 39.79 | 54.00 | 14.21 | Average |
| 3 | 2410.845 | 29.45 | 7.43 | 36.62 | 68.18 | 68.44 | 54.00 | -14.44 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

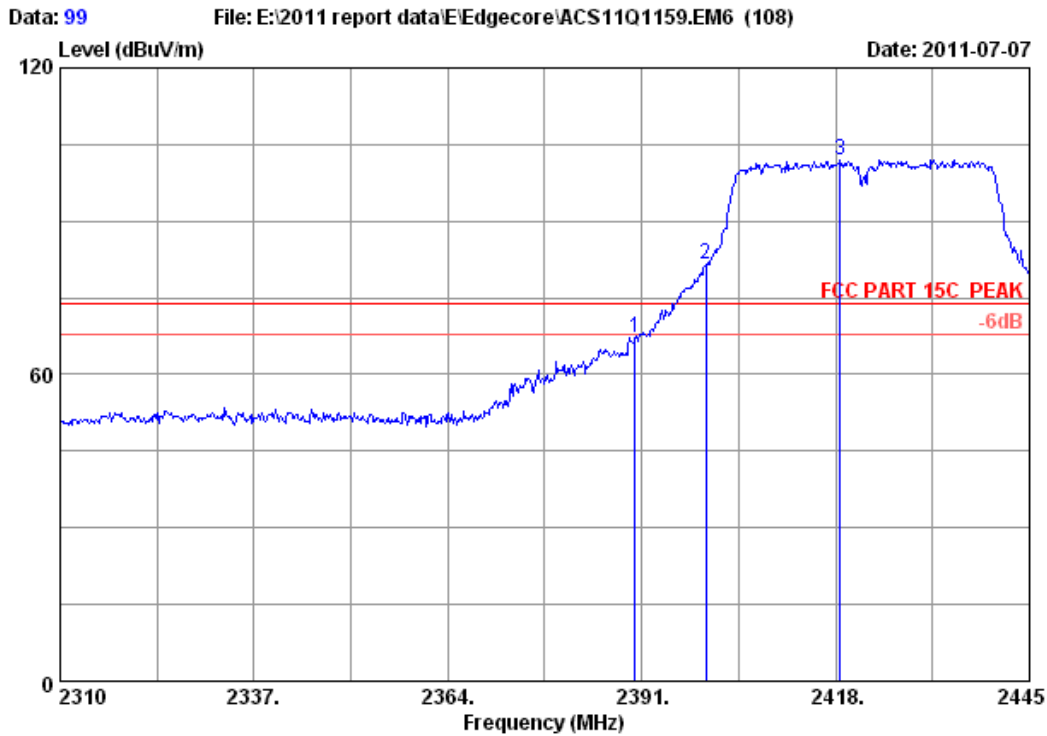


Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.000 | 29.44 | 7.39 | 36.62 | 66.99 | 67.20 | 74.00 | 6.80 | Peak |
| 2 | 2400.000 | 29.44 | 7.43 | 36.62 | 81.34 | 81.59 | 74.00 | -7.59 | Peak |
| 3 | 2418.675 | 29.45 | 7.43 | 36.61 | 101.80 | 102.07 | 74.00 | -28.07 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

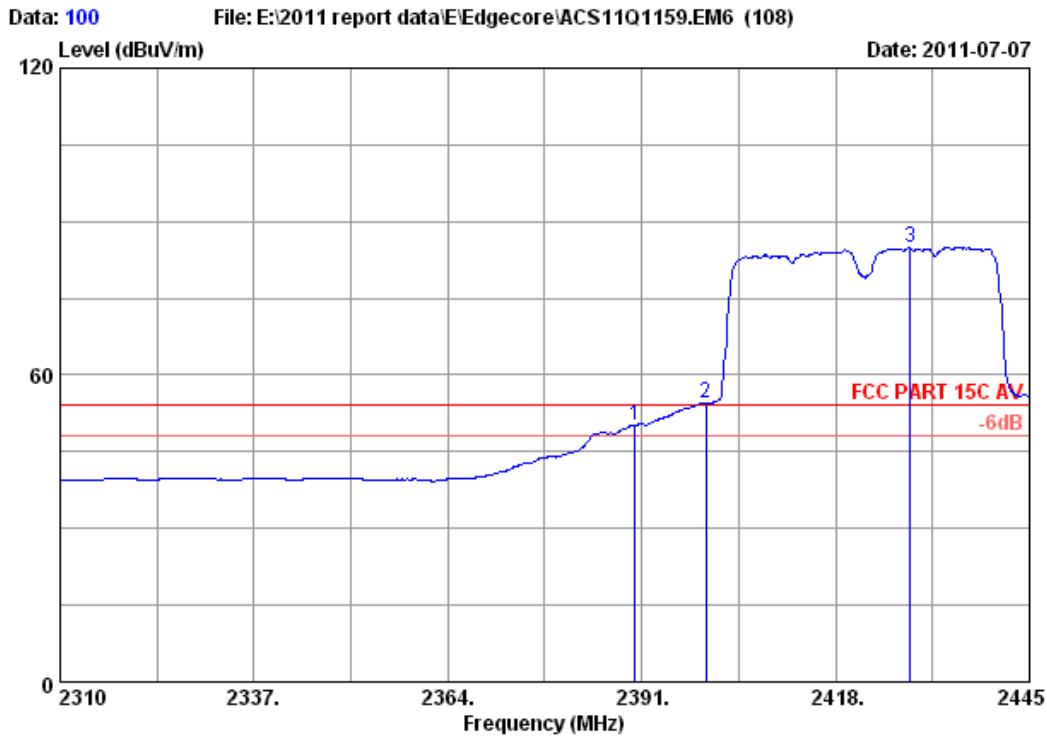


Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2390.000 | 29.44 | 7.39 | 36.62 | 49.81 | 50.02 | 54.00 | 3.98 | Average |
| 2 | 2400.000 | 29.44 | 7.43 | 36.62 | 54.21 | 54.46 | 54.00 | -0.46 | Average |
| 3 | 2428.395 | 29.46 | 7.46 | 36.61 | 84.52 | 84.83 | 54.00 | -30.83 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

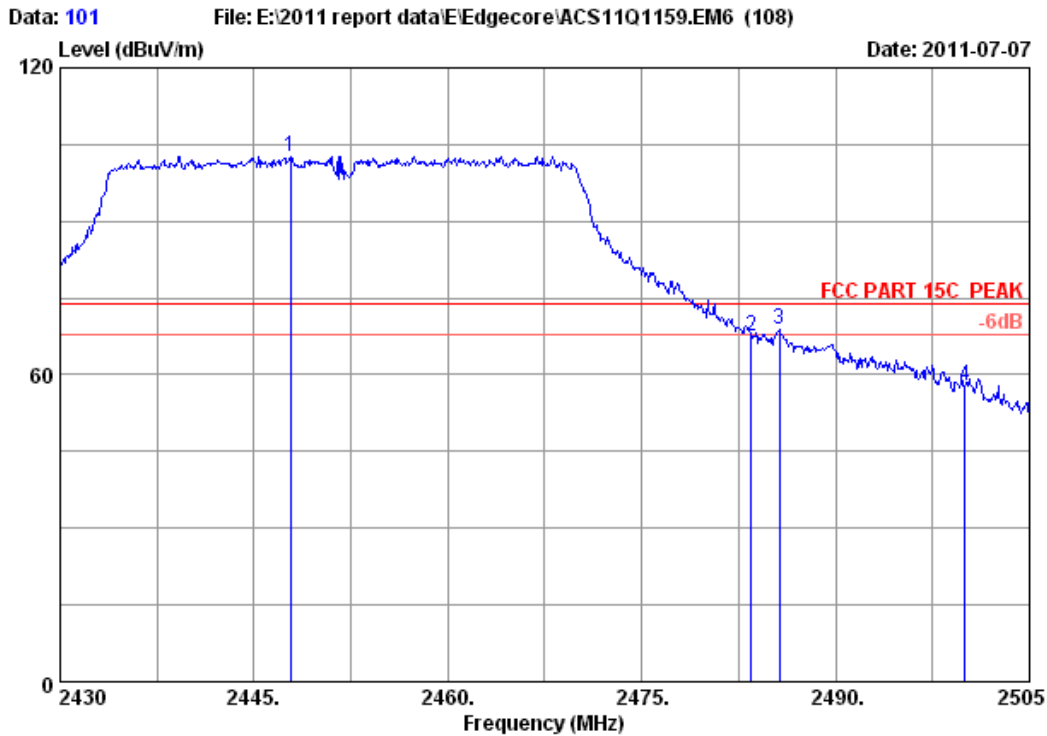


Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2447.850 | 29.47 | 7.50 | 36.61 | 102.36 | 102.72 | 74.00 | -28.72 | Peak |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 67.13 | 67.60 | 74.00 | 6.40 | Peak |
| 3 | 2485.650 | 29.49 | 7.58 | 36.60 | 68.28 | 68.75 | 74.00 | 5.25 | Peak |
| 4 | 2500.000 | 29.50 | 7.62 | 36.60 | 57.17 | 57.69 | 74.00 | 16.31 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

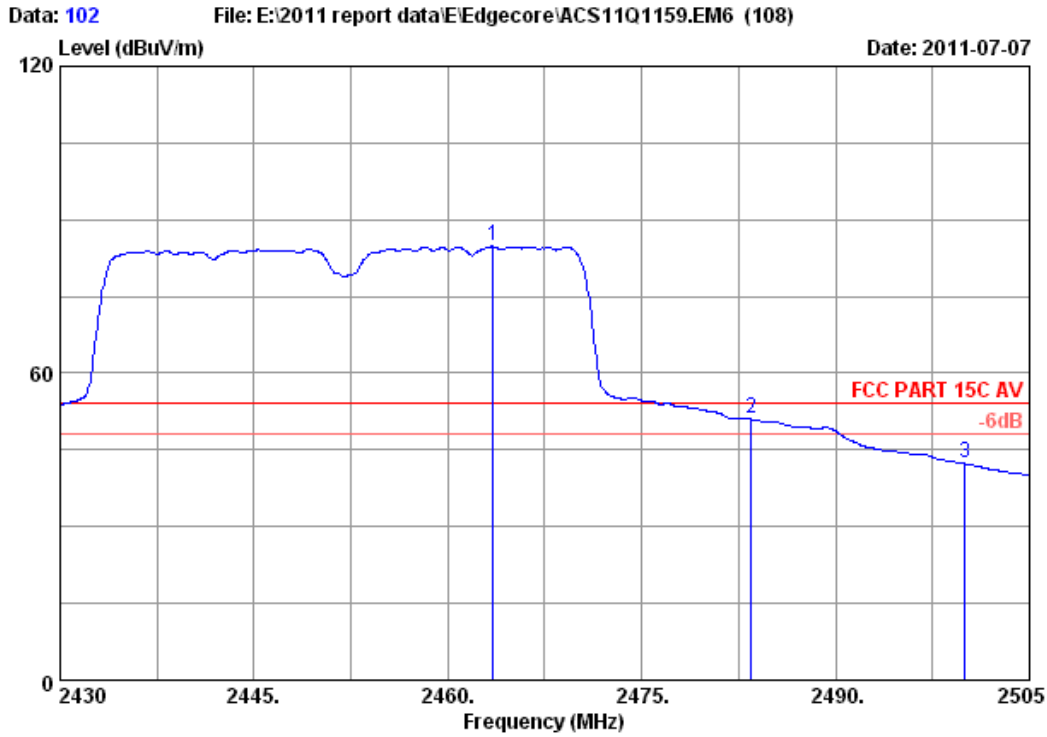


Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2463.525 | 29.48 | 7.54 | 36.61 | 84.33 | 84.74 | 54.00 | -30.74 | Average |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 50.53 | 51.00 | 54.00 | 3.00 | Average |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 41.77 | 42.29 | 54.00 | 11.71 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

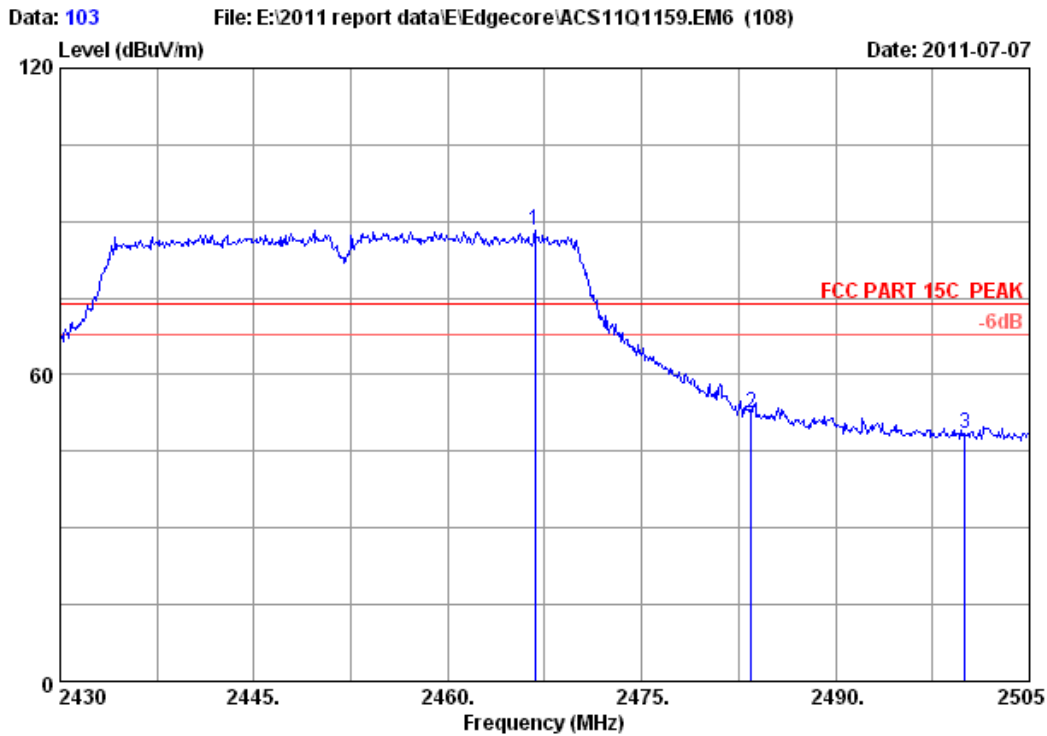


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : SMCWBR14-N5

| | Ant. | Cable | Amp. | Emission | | | | | |
|-------|----------|-------|--------|----------|----------|----------|--------|--------|------|
| Freq. | Factor | loss | Factor | Reading | Level | Limits | Margin | Remark | |
| (MHz) | (dB/m) | (dB) | (dB) | (dBuV) | (dBuV/m) | (dBuV/m) | (dB) | | |
| 1 | 2466.750 | 29.48 | 7.54 | 36.60 | 87.81 | 88.23 | 74.00 | -14.23 | Peak |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 51.88 | 52.35 | 74.00 | 21.65 | Peak |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 48.02 | 48.54 | 74.00 | 25.46 | Peak |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

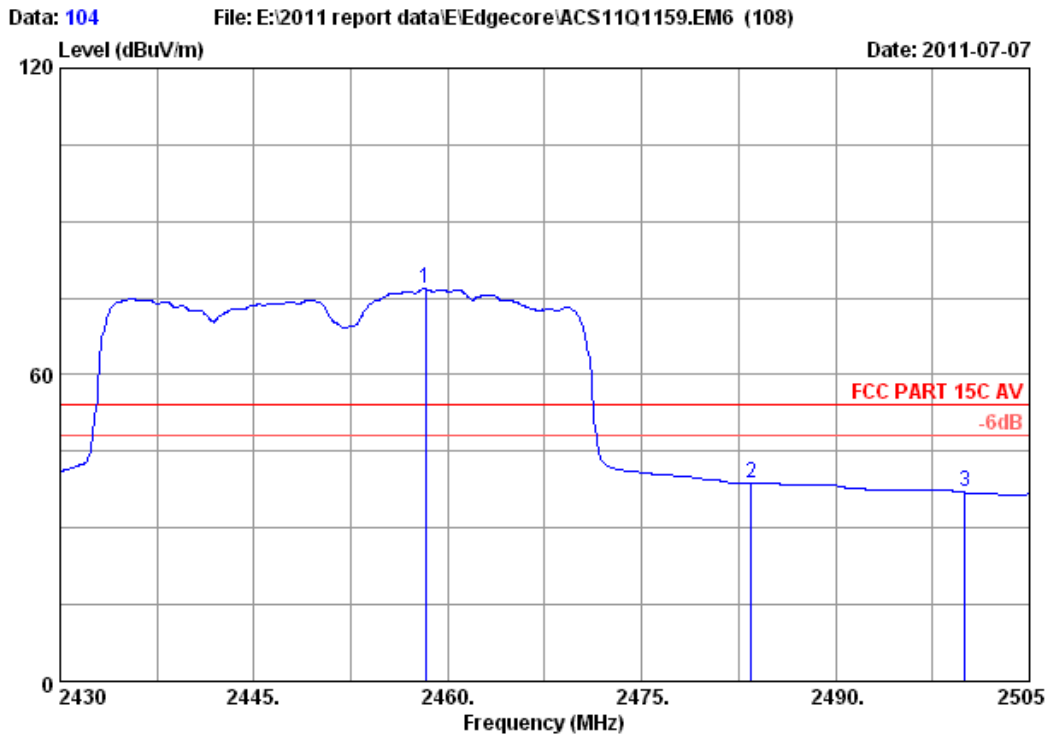

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 300 Mbps 4-port Wireless Broadband Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : SMCWBR14-N5

| | Ant. Freq. (MHz) | Ant. Factor (dB/m) | Cable loss (dB) | Amp. Factor (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|---|------------------|--------------------|-----------------|------------------|----------------|-------------------------|-----------------|-------------|---------|
| 1 | 2458.275 | 29.48 | 7.50 | 36.61 | 76.40 | 76.77 | 54.00 | -22.77 | Average |
| 2 | 2483.500 | 29.49 | 7.58 | 36.60 | 38.29 | 38.76 | 54.00 | 15.24 | Average |
| 3 | 2500.000 | 29.50 | 7.62 | 36.60 | 36.44 | 36.96 | 54.00 | 17.04 | Average |

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

7. 6dB Bandwidth Test

7.1. Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|--------------|-------------|------------|-----------|---------------|
| 1. | Spectrum Analyzer | Agilent | E4446A | US44300459 | May.08,11 | 1 Year |
| 2. | Attenuator | Agilent | 8491B | MY39262165 | May.08,11 | 1 Year |
| 3. | RF Cable | Hubersuhner | SUCOFLEX102 | 28618/2 | May.08,11 | 1 Year |

7.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

7.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300 kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.4. Test Results

| | | |
|--|---------------------|---------------------|
| EUT: 300 Mbps 4-port Wireless Broadband Router | | |
| M/N: SMCWBR14-N5 | | |
| Test date: 2011-06-27 | Pressure: 100.6 kpa | Humidity: 56 % |
| Tested by: Sunny-lu | Test site: RF Site | Temperature : 25 °C |

| Test Mode | CH | Result | | Limit (KHz) |
|-------------------|------|------------------------------------|------------------------------------|-------------|
| | | Chain0 6dB bandwidth (MHz) | Chain1 6dB bandwidth (MHz) | |
| 11b | CH1 | 12.560 | 12.134 | >500 |
| | CH6 | 13.042 | 12.113 | >500 |
| | CH11 | 12.084 | 12.607 | >500 |
| 11g | CH1 | 16.520 | 16.605 | >500 |
| | CH6 | 16.567 | 16.550 | >500 |
| | CH11 | 16.590 | 16.601 | >500 |
| 11n HT20 | CH1 | 17.791 | 17.780 | >500 |
| | CH6 | 17.715 | 17.751 | >500 |
| | CH11 | 17.698 | 17.752 | >500 |
| 11n HT40 | CH1 | 36.389 | 36.403 | >500 |
| | CH4 | 36.171 | 36.125 | >500 |
| | CH7 | 36.433 | 36.184 | >500 |
| Conclusion : PASS | | | | |


Chain 0
 Test Mode: IEEE 802.11b TX
 Test CH1: 2412MHz

| | | |
|--|--|---|
| <p>Agilent L</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> | | <p>Marker</p> <p>Select Marker 1 2 3 4</p> <p>Normal</p> <p>Delta</p> <p>Delta Pair (Tracking Ref) Ref ▲</p> <p>Span Pair Span Center</p> <p>Off</p> <p>More 1 of 2</p> |
| <p>Ref 20.6 dBm #Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>20.6</p> <p>dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)</p> | | |
| <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>15.8139 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 3.568 kHz</p> <p>x dB Bandwidth 12.560 MHz</p> | | |
| <p>Copyright 2000-2005 Agilent Technologies</p> | | |

Test CH6: 2437MHz


| | | |
|--|--|--|
| <p>Agilent L</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> | | <p>Trace</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p> |
| <p>Ref 20.6 dBm #Atten 10 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>20.6</p> <p>dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)</p> | | |
| <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>15.7398 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 66.861 kHz</p> <p>x dB Bandwidth 13.042 MHz</p> | | |
| <p>File Operation Status, A:\SCREN659.GIF file saved</p> | | |

Test CH11: 2462MHz

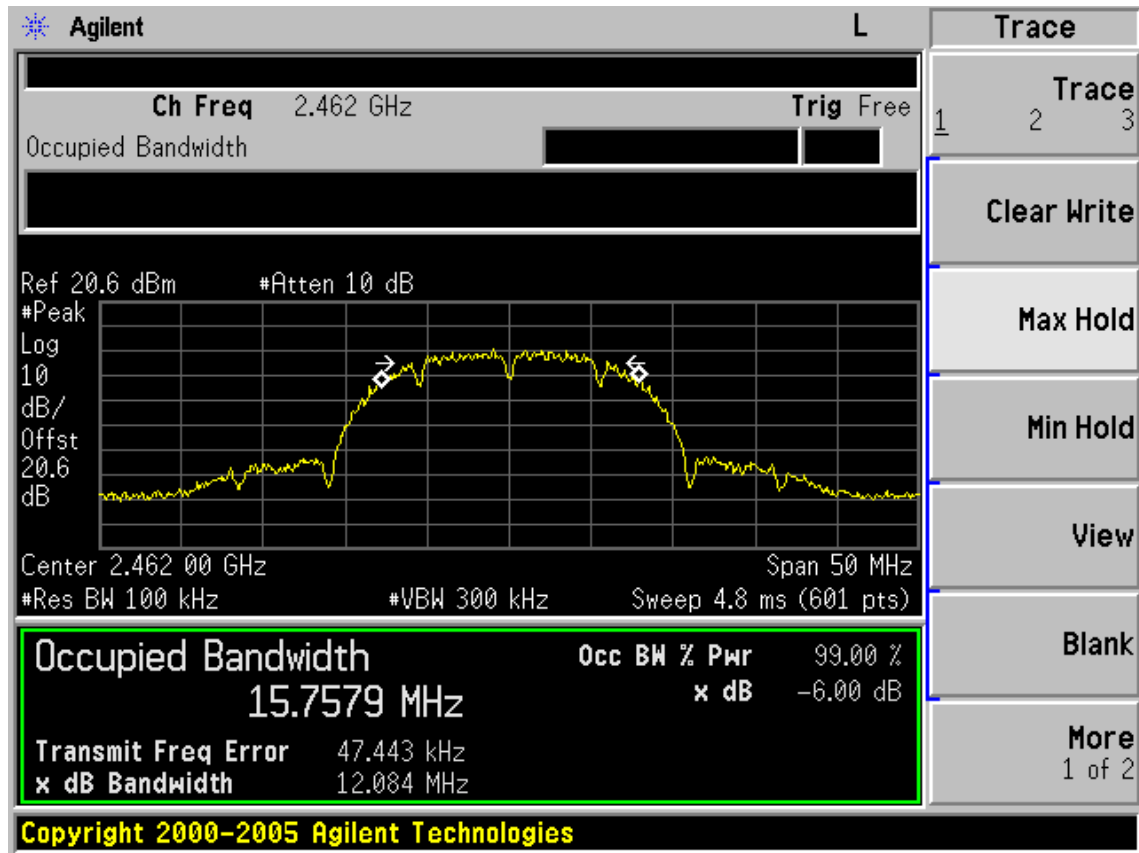

Test Mode: IEEE 802.11g TX

Test CH1: 2412MHz

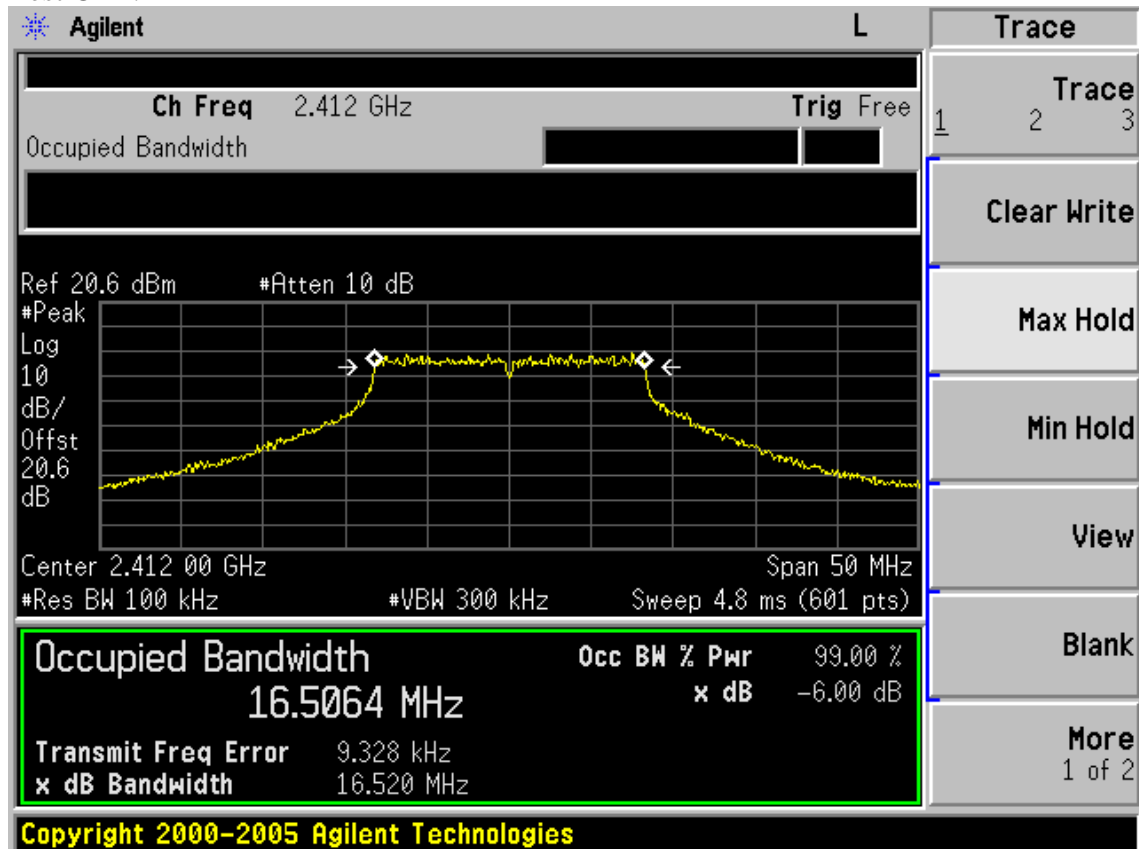

FCC ID: YZKSMCWBR14N5

page

Test CH6: 2437MHz

Agilent
L

Ch Freq 2.437 GHz **Trig** Free

Occupied Bandwidth [] []

Ref 20.6 dBm #Atten 10 dB

#Peak

Log

10

dB/

Offst

20.6

dB

Center 2.437 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

Occupied Bandwidth **Occ BW % Pwr** 99.00 %

16.5145 MHz **x dB** -6.00 dB

Transmit Freq Error 2.546 kHz

x dB Bandwidth 16.567 MHz

File Operation Status, A:\SCREN665.GIF file saved

Trace

Trace
1 2 3

Clear Write

Max Hold

Min Hold

View

Blank

More
1 of 2

Test CH11: 2462MHz

Agilent
L

Ch Freq 2.462 GHz **Trig** Free

Occupied Bandwidth [] []

Ref 20.6 dBm #Atten 10 dB

#Peak

Log

10

dB/

Offst

20.6

dB

Center 2.462 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

Occupied Bandwidth **Occ BW % Pwr** 99.00 %

16.5165 MHz **x dB** -6.00 dB

Transmit Freq Error 8.158 kHz

x dB Bandwidth 16.590 MHz

Copyright 2000-2005 Agilent Technologies

Trace

Trace
1 2 3

Clear Write

Max Hold


Min Hold

View


Blank

More
1 of 2


Test Mode: IEEE 802.11n HT20TX
 Test CH1: 2412MHz

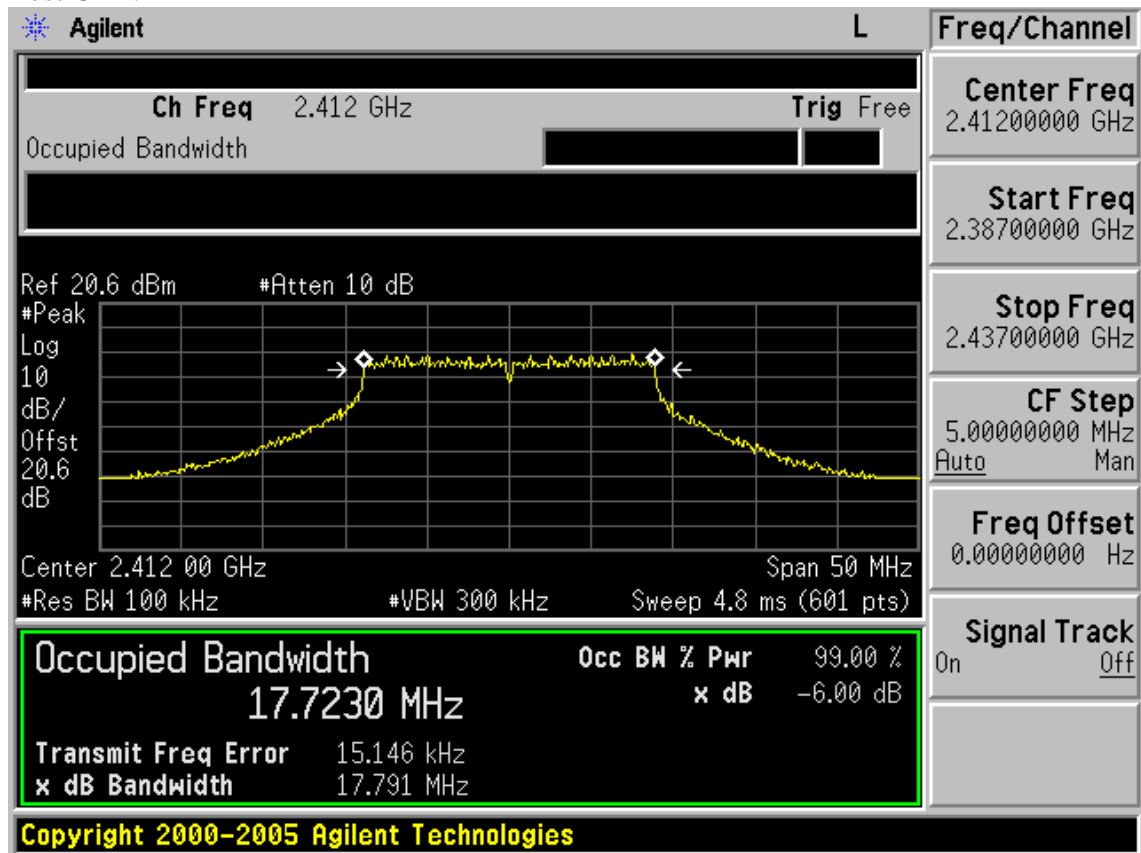

Test CH6: 2437MHz

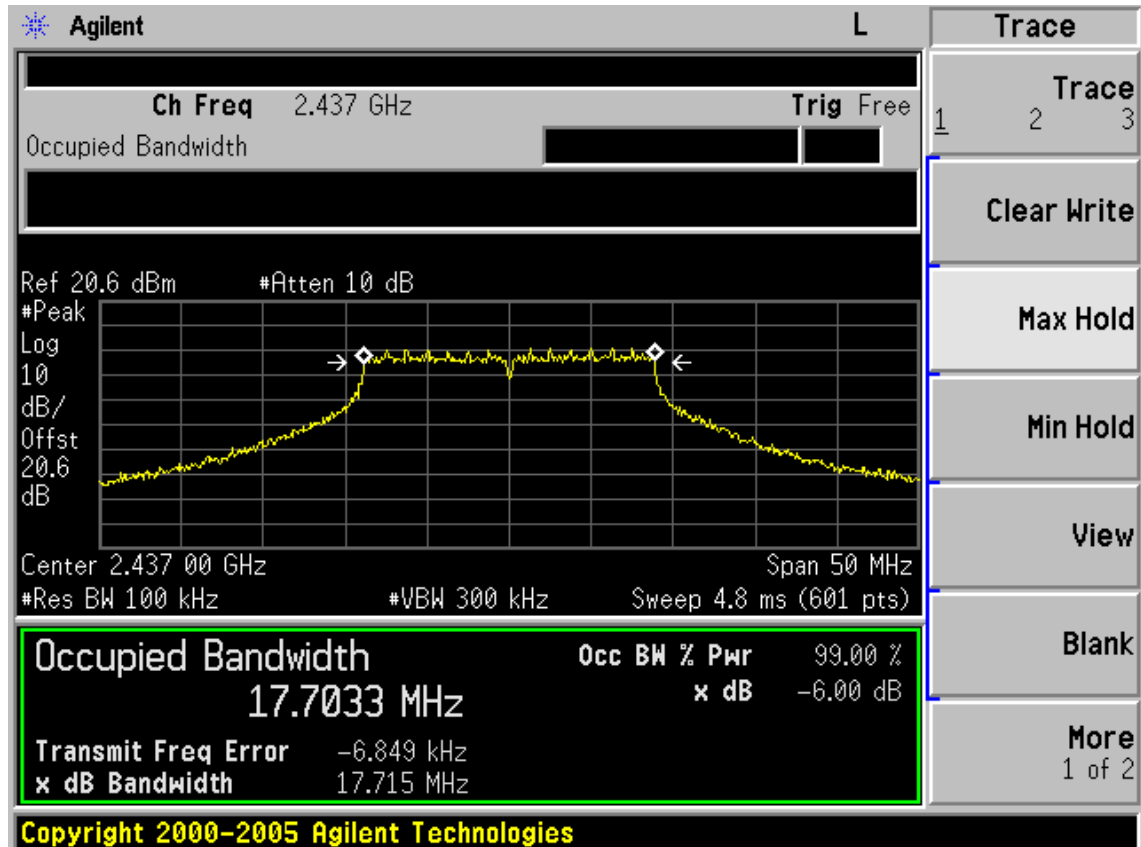


Test CH1: 2462MHz

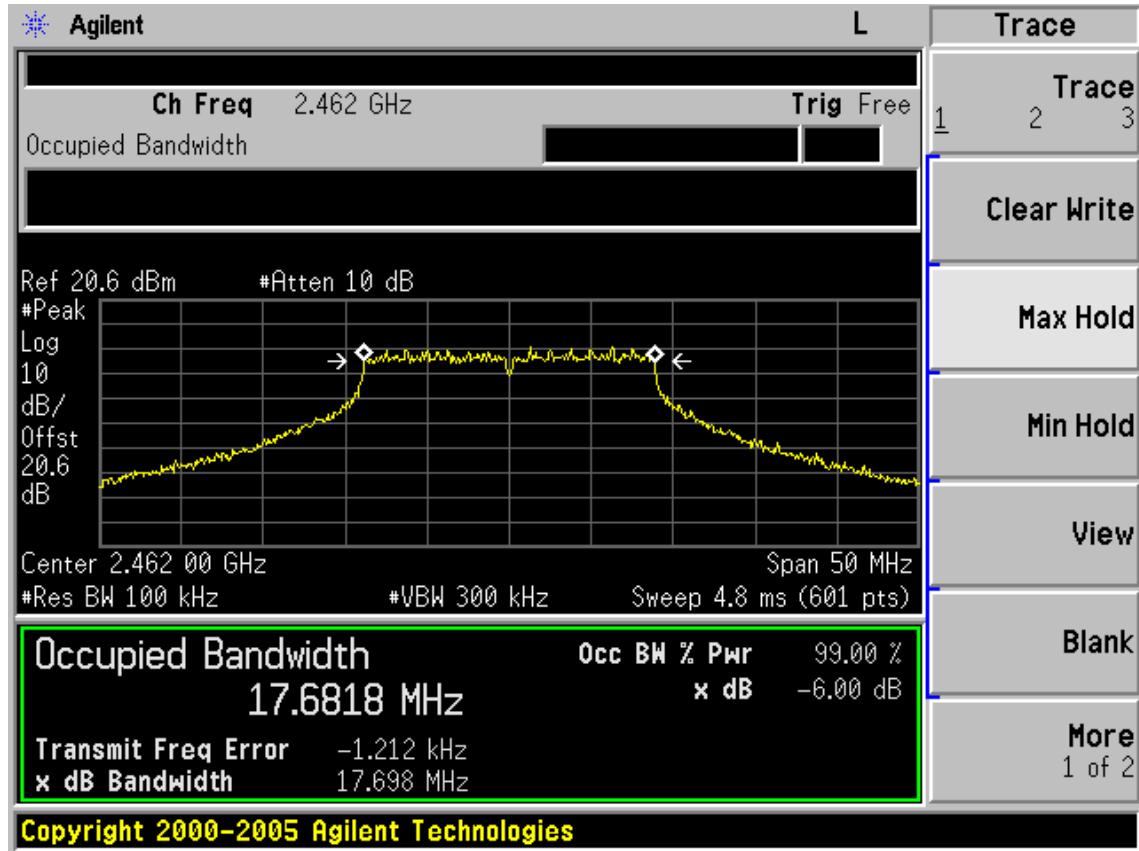


Test Mode: IEEE 802. 11n HT40TX


Test CH1: 2422MHz

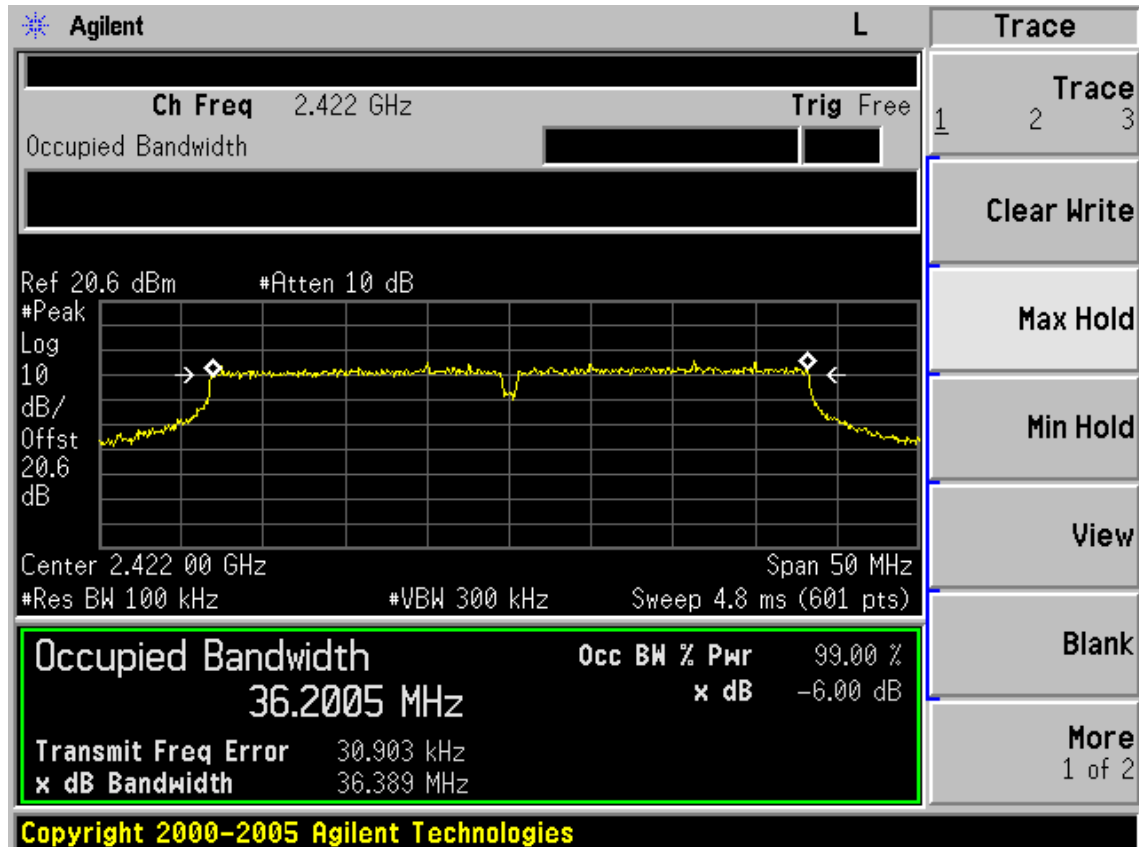


Test CH4: 2437MHz

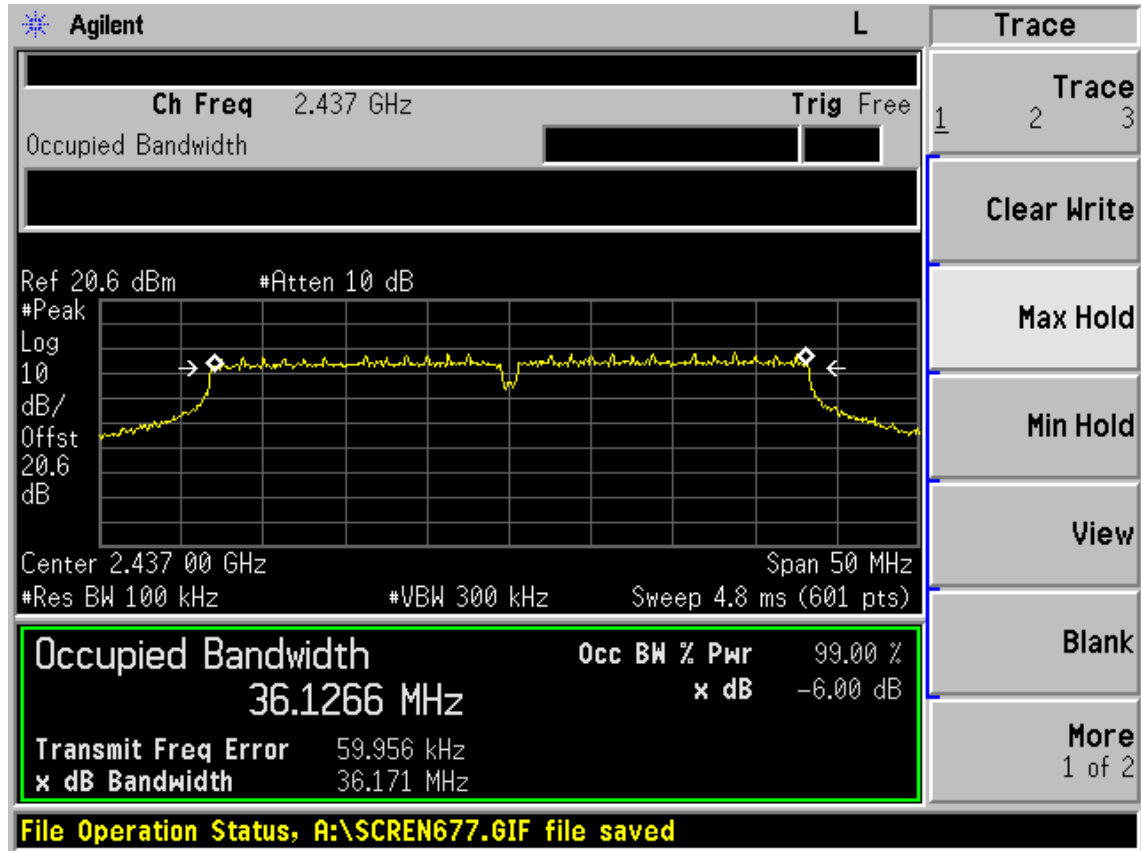


Test CH7: 2452MHz

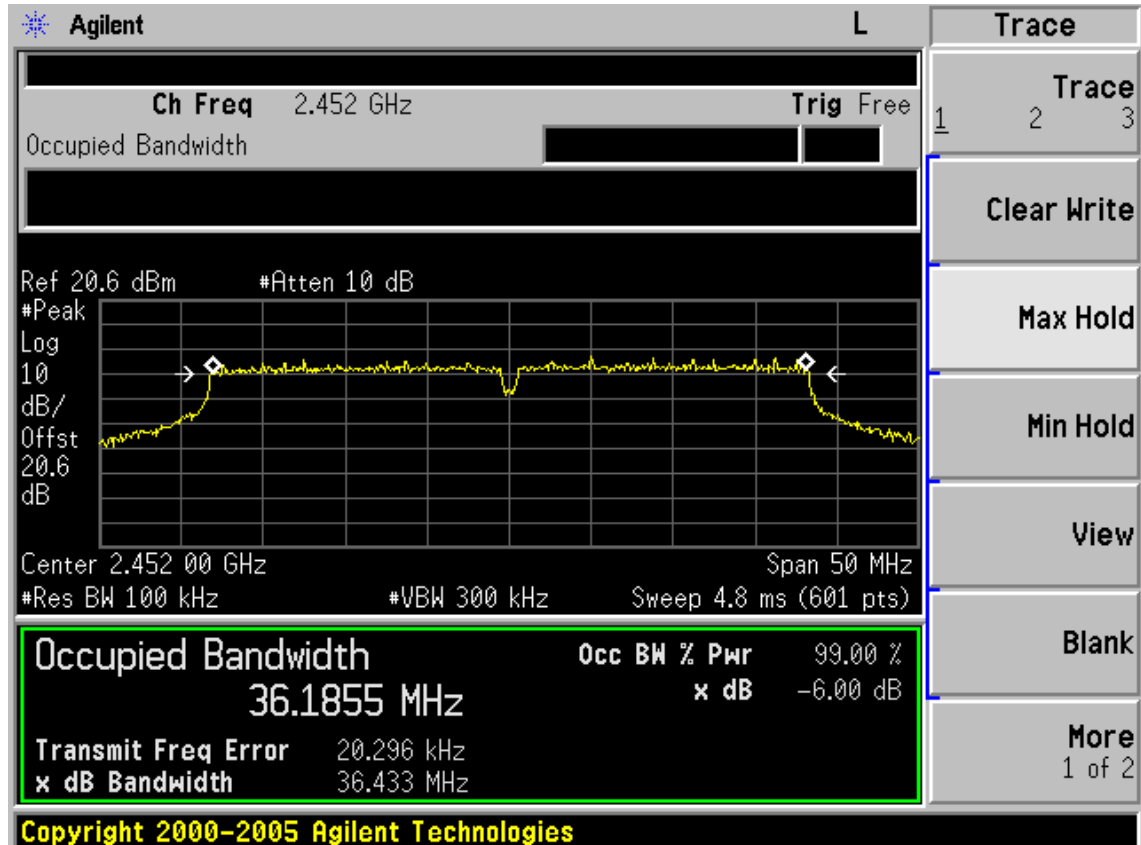


Chain1
 Test Mode: IEEE 802.11b TX
 Test CH1: 2412MHz

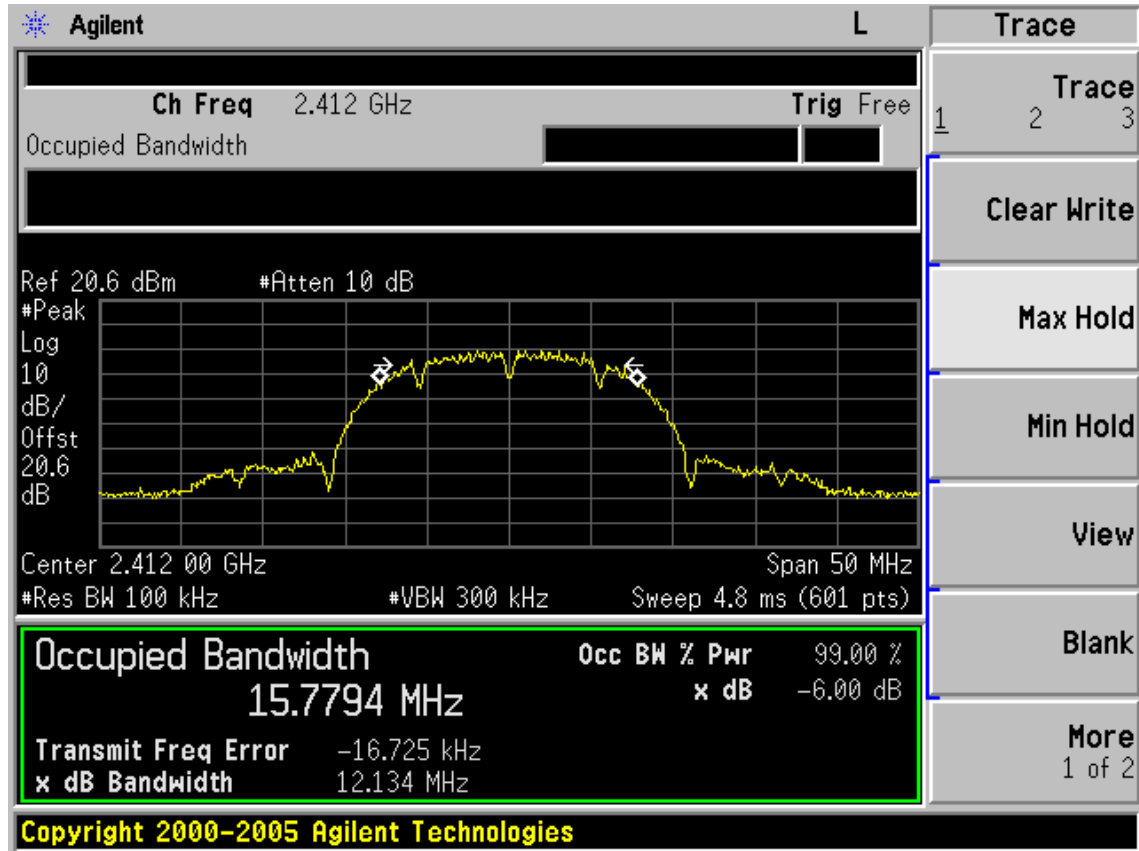

Test CH6: 2437MHz

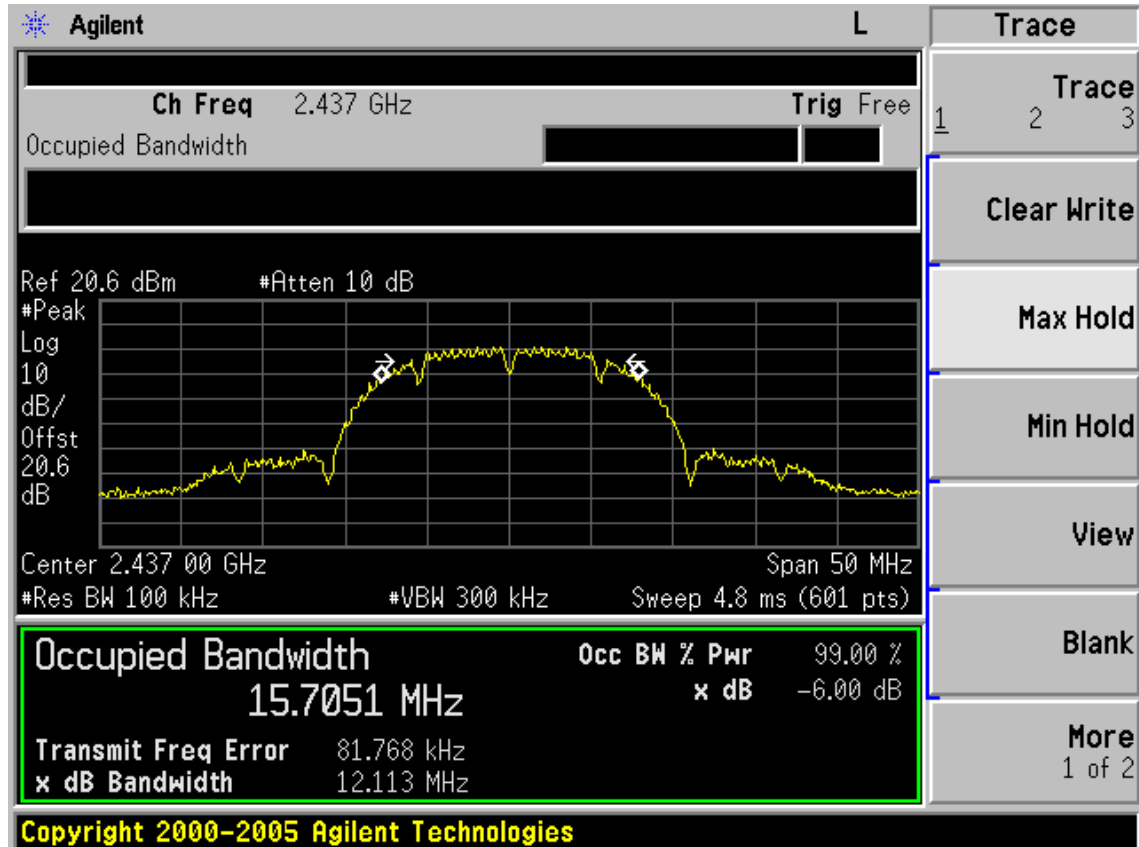


Test CH1 1: 2462MHz

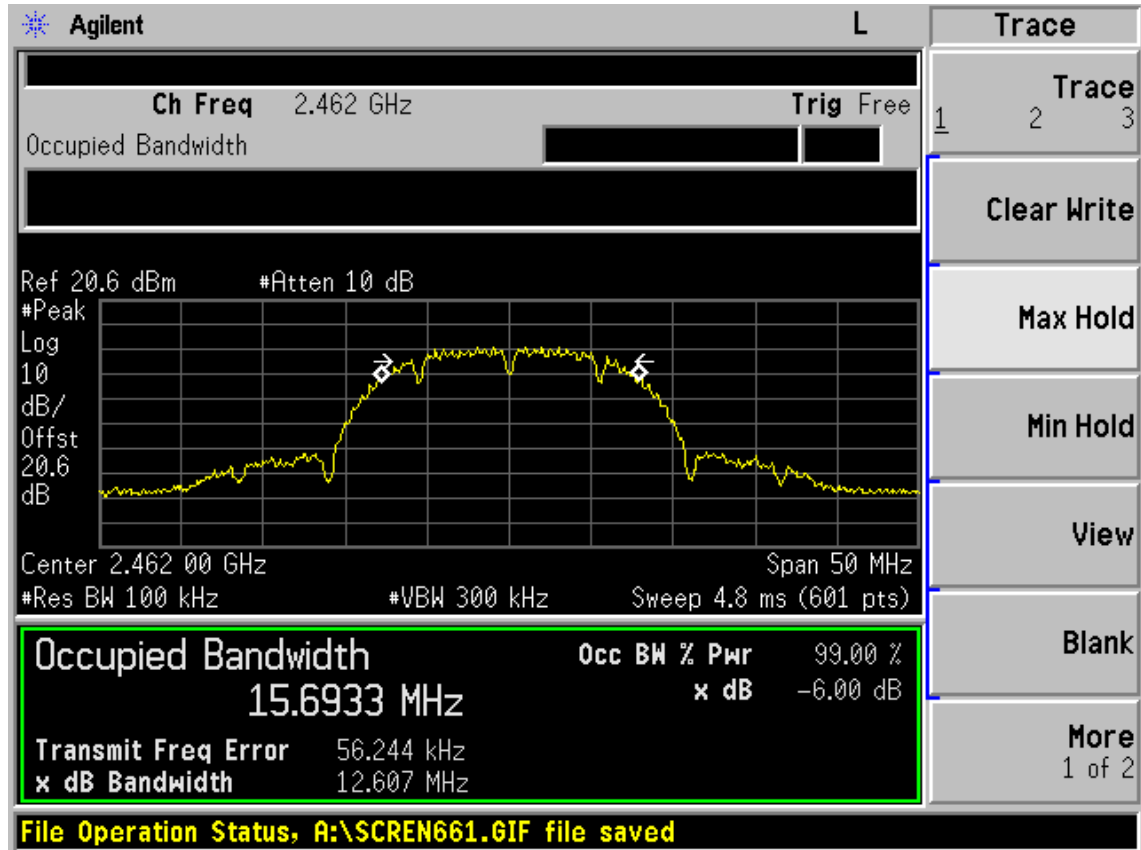

Test Mode: IEEE 802.11g TX

Test CH1: 2412MHz

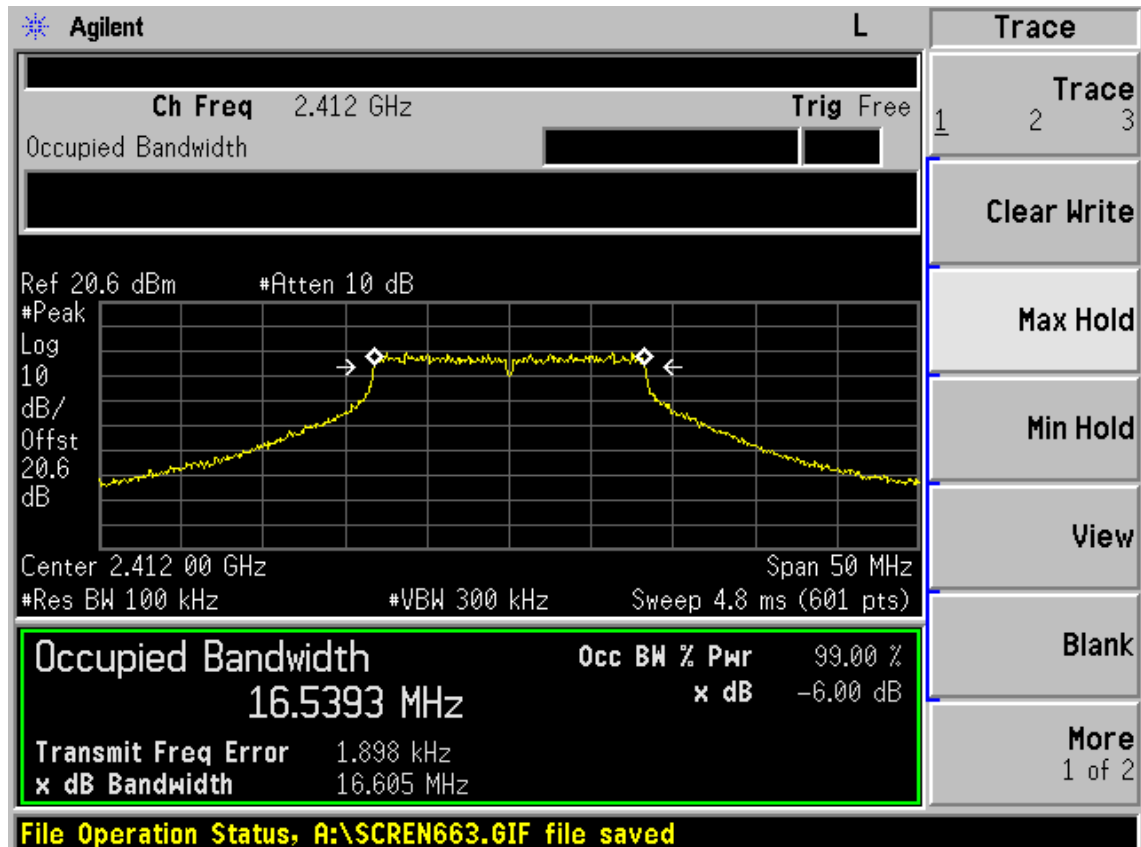

Test CH6: 2437MHz

Agilent L

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth

Ref 20.6 dBm #Atten 10 dB

#Peak

Log 10 dB/Offst 20.6 dB

Center 2.437 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

| | | |
|----------------------------|---------------------|----------|
| Occupied Bandwidth | Occ BW % Pwr | 99.00 % |
| 16.4956 MHz | x dB | -6.00 dB |
| Transmit Freq Error | 2.768 kHz | |
| x dB Bandwidth | 16.550 MHz | |

Copyright 2000-2005 Agilent Technologies

Test CH11: 2462MHz

Agilent L

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20.6 dBm #Atten 10 dB

#Peak

Log 10 dB/Offst 20.6 dB

Center 2.462 00 GHz Span 50 MHz


#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

| | | |
|----------------------------|---------------------|----------|
| Occupied Bandwidth | Occ BW % Pwr | 99.00 % |
| 16.5244 MHz | x dB | -6.00 dB |
| Transmit Freq Error | 11.003 kHz | |
| x dB Bandwidth | 16.601 MHz | |


File Operation Status, A:\SCREN667.GIF file saved

Test Mode: IEEE 802.11n HT20TX


Test CH1: 2412MHz

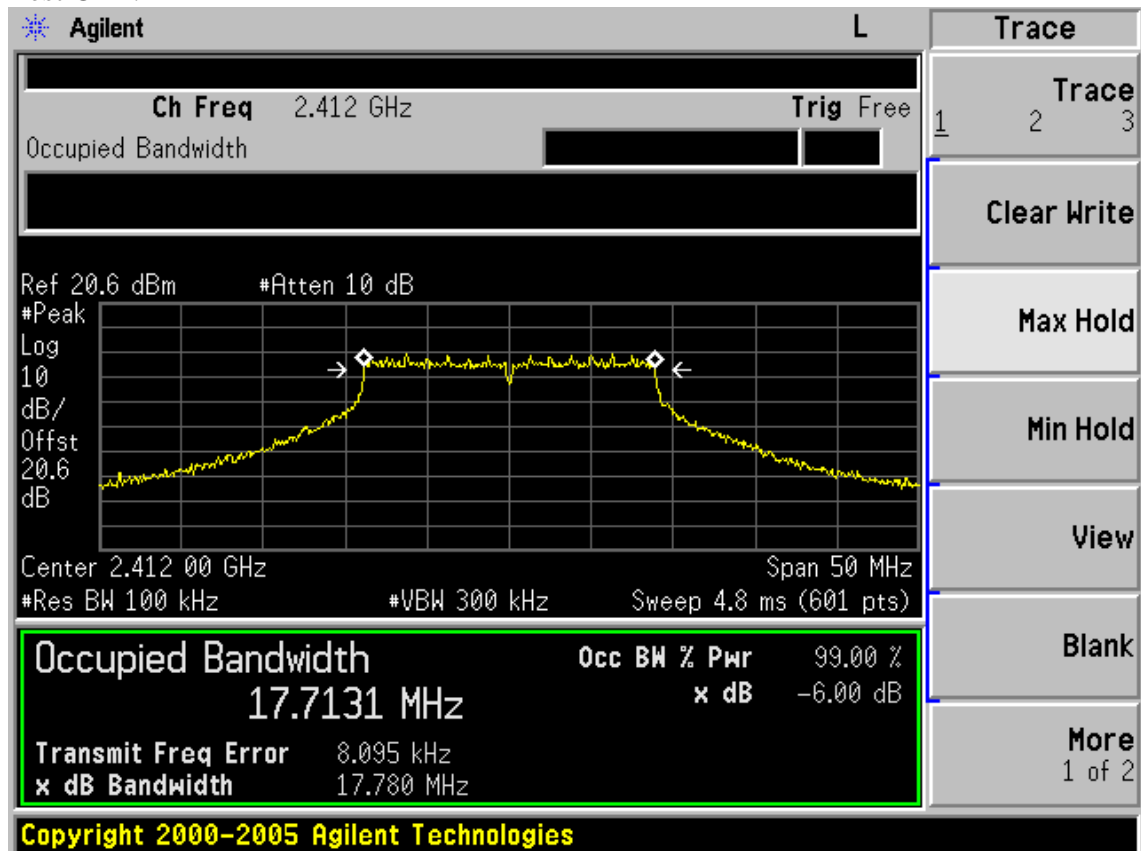

Test CH6: 2437MHz

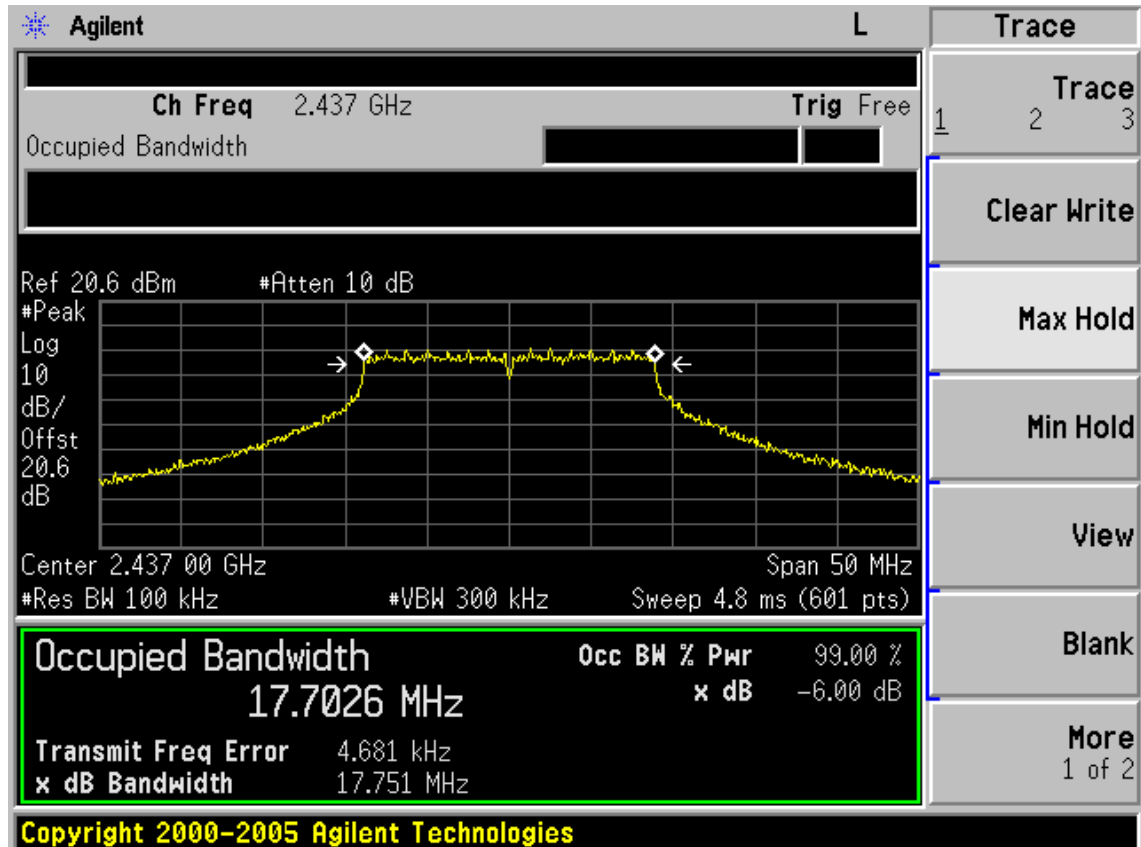


Test CH1: 2462MHz

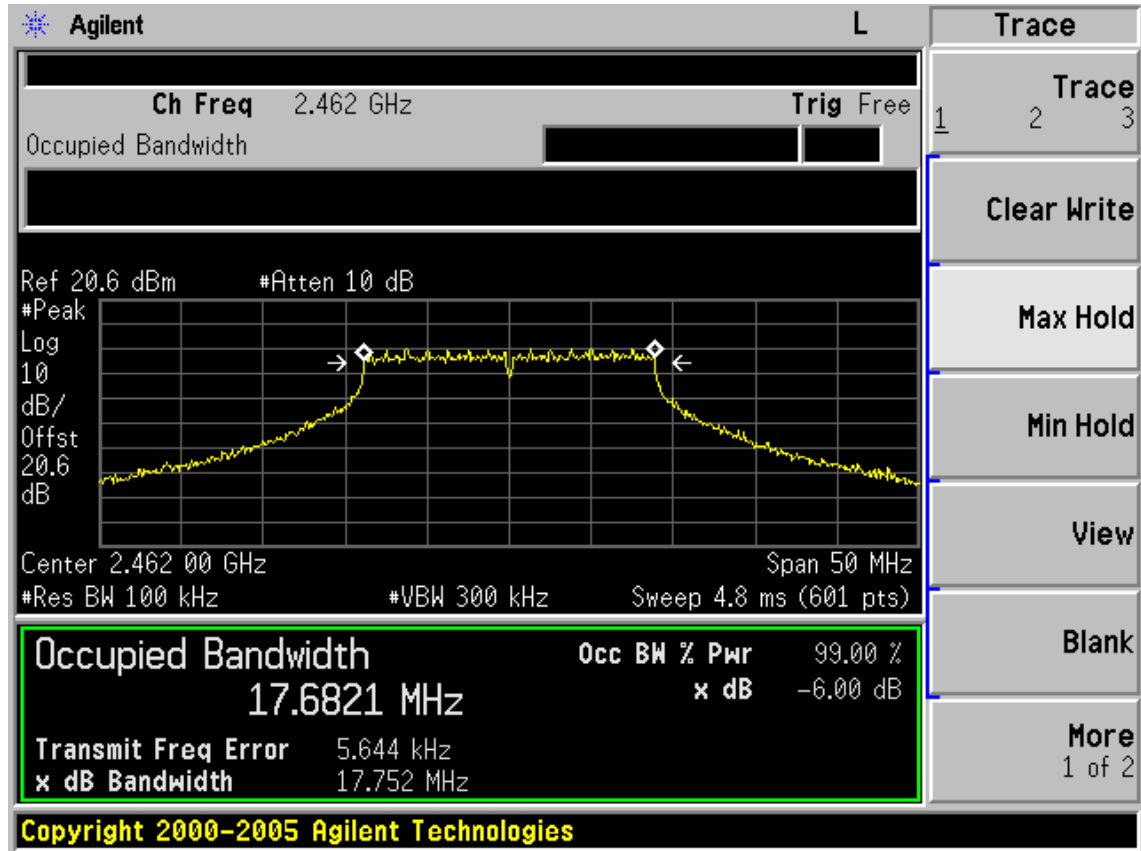


Test Mode: IEEE 802. 11n HT40TX


Test CH1: 2422MHz

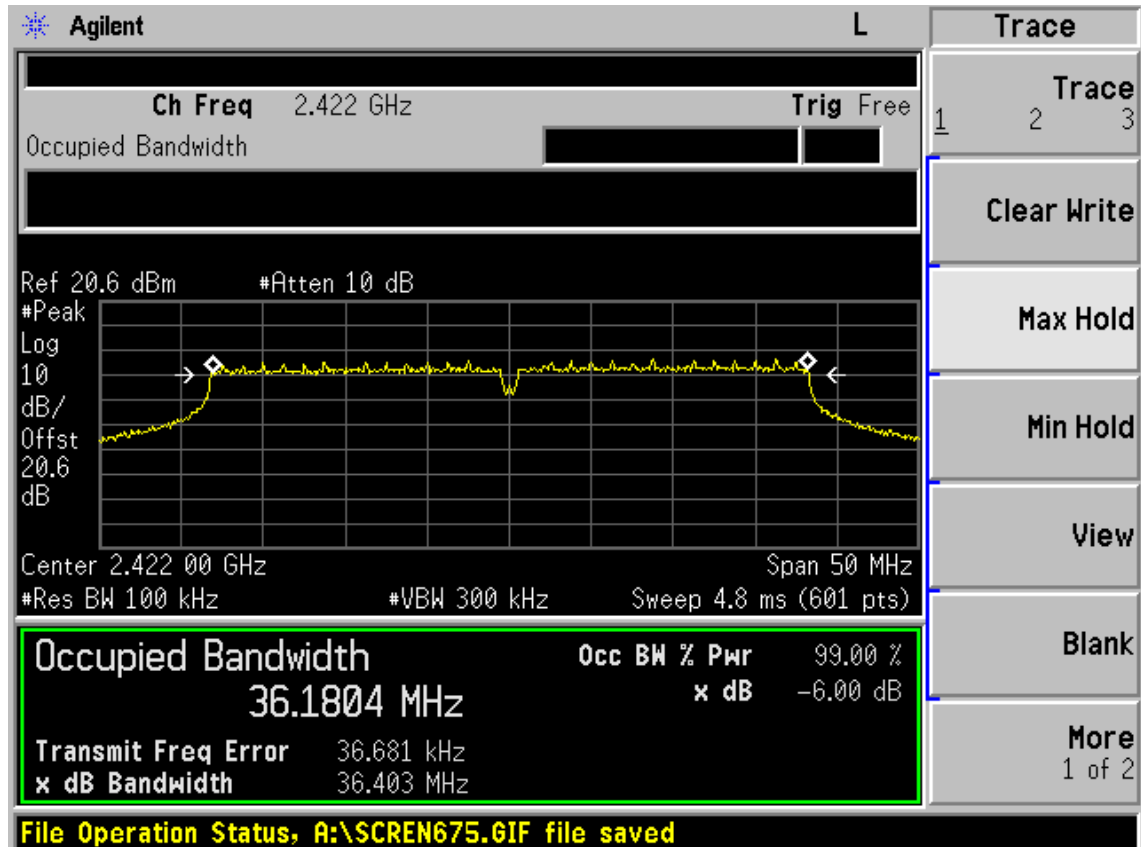

Test CH4: 2437MHz

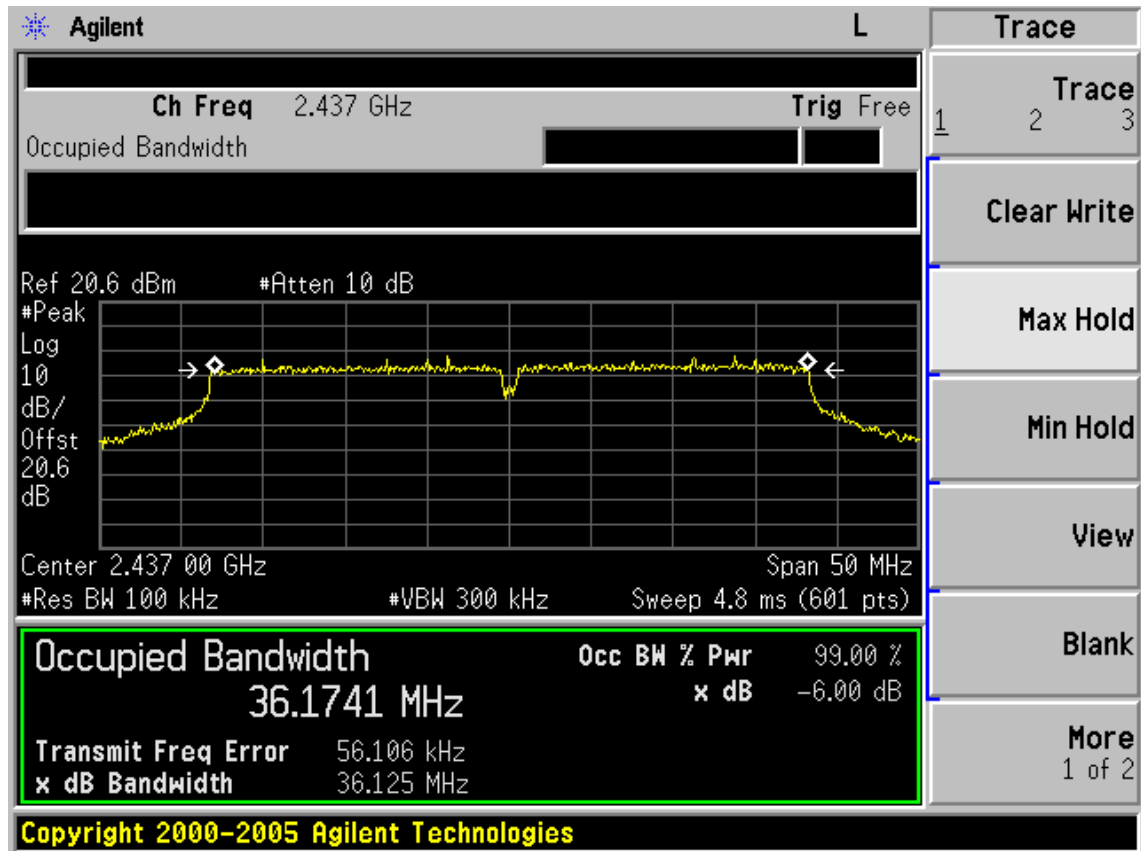

Test CH7: 2452MHz

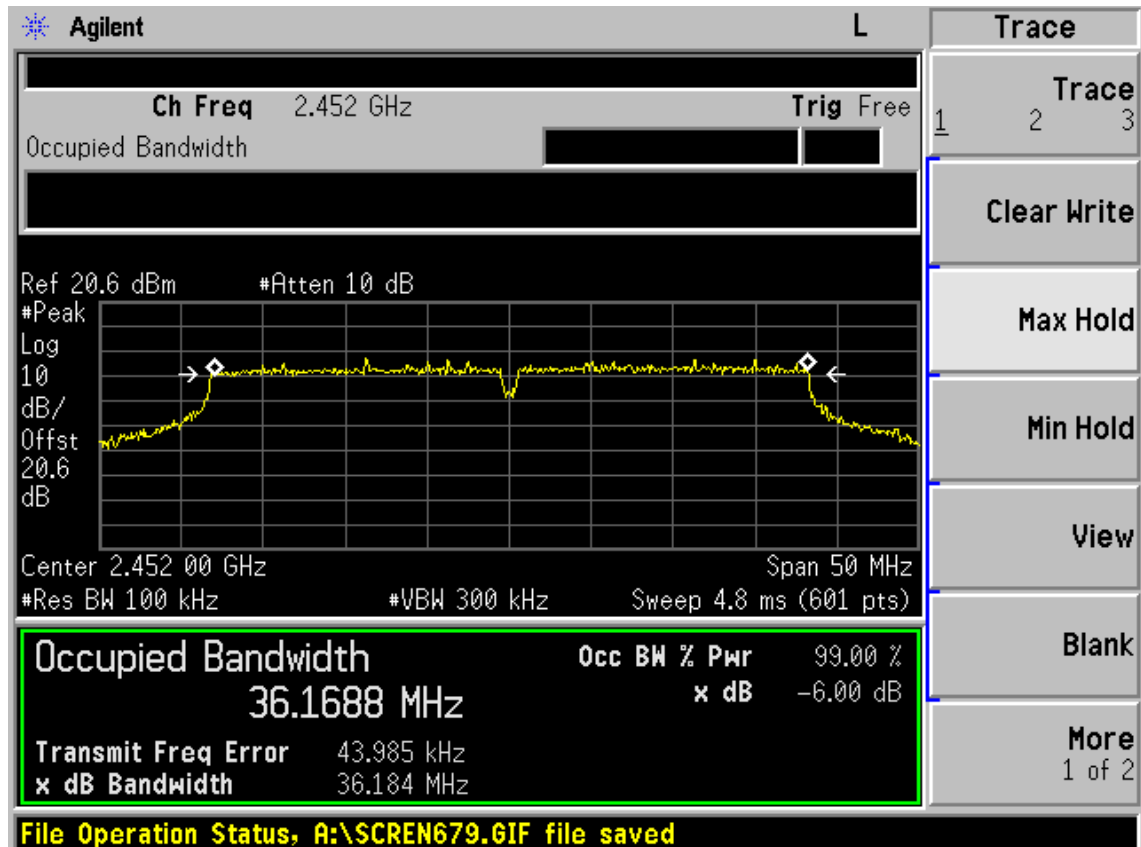

8. OUTPUT POWER TEST

8.1. Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|--------------|-------------|------------|------------|---------------|
| 1. | Power meter | Anritsu | ML2487A | 6K00002472 | May.08,11 | 1 Year |
| 2. | Power sensor | Anritsu | MA2491A | 0033005 | May.08,11 | 1 Year |
| 3 | Attenuator | Agilent | 8491B | MY39262165 | May.08,11 | 1 Year |
| 4 | Spectrum Analyzer | Agilent | E4446A | US44300459 | May.08, 11 | 1 Year |
| 5 | RF Cable | Hubersuhner | SUCOFLEX102 | 28618/2 | May.08,11 | 1 Year |

8.2. Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

8.3. Test Procedure

- 1, Connected the EUT's antenna port to measure device by 20dB attenuator.
- 2, For IEEE 802.11b/g and IEEE802.11n HT20 mode, use a PK power meter which's bandwidth is 20MHz and above 6dB bandwidth of signal to measure out each test modes' PK output power.
- 3, For IEEE802.11n HT40 mode, because the signal's bandwidth is about 40MHz and above 20MHz bandwidth of power sensor ML2491A. So Bandwidth correction method according to ANSI C63.10 clause 6.10.2.1 part (c) was used:
 - 1) Set the RBW=3MHz and VBW =8MHz
 - 2) Turn averaging off
 - 3) Set sweep to automatic
 - 4) Set the span just large enough to capture the emission
 - 5) Use a peak detector on max hold
 - 6) Record the measured power
 - 7) Calculate Output power of EUT use the formula:

Peak output power =measured power+ 10log[(6dB bandwidth of emission)/(analyzer RBW)]

- 4, For IEEE802.11n mode, it's MIMO technology, so account total PK output power by add each chain's PK output power.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

8.4. Test Results

| EUT: 300 Mbps 4-port Wireless Broadband Router | | | | | |
|--|----------|-------------------------|--------|-------|---------------------|
| M/N: SMCWBR14-N5 | | | | | |
| Test date: 2011-07-08 | | Pressure: 101.7 kpa | | | Humidity: 54 % |
| Tested by: Leo-Li | | Test site: RF site | | | Temperature: 25 °C |
| Cable loss: 1 dB | | Attenuator loss: 20 dB | | | Antenna Gain: 5 dBi |
| Test Mode | CH (MHz) | Peak output Power (dBm) | | | Limit (dBm) |
| | | Chain0 | Chain1 | Total | |
| 11b | CH1 | 20.07 | 19.98 | N/A | 30 |
| | CH6 | 20.38 | 19.83 | N/A | 30 |
| | CH11 | 20.05 | 19.62 | N/A | 30 |
| 11g | CH1 | 20.45 | 20.29 | N/A | 30 |
| | CH6 | 22.36 | 22.08 | N/A | 30 |
| | CH11 | 20.11 | 19.81 | N/A | 30 |
| 11n HT20 | CH1 | 20.18 | 19.07 | 22.69 | 30 |
| | CH6 | 20.23 | 21.84 | 24.14 | 30 |
| | CH11 | 20.27 | 19.51 | 22.94 | 30 |

| Test Mode | CH | Result | | | | | Limit (dBm) |
|-----------|-----|--------------------------|--------|-----------------------|--------|-------|-------------|
| | | Measured power(dBm)/3MHz | | PK Output power (dBm) | | | |
| | | Chain0 | Chain1 | Chain0 | Chain1 | Total | |
| 11n HT40 | CH3 | 6.73 | 6.52 | 17.57 | 17.36 | 20.52 | 30 |
| | CH6 | 11.31 | 10.25 | 22.15 | 22.09 | 25.14 | 30 |
| | CH9 | 6.60 | 6.10 | 17.44 | 16.94 | 20.25 | 30 |

Chain 0 6dB Bandwidth for 11n HT40: 36.403MHz

Chain 1 6dB Bandwidth for 11n HT40: 36.433MHz

Chain 0 BW correction factor = $10\log[(36.403\text{MHz})/(3\text{MHz})] = 10.84\text{dB}$

Chain 1 BW correction factor = $10\log[(36.433\text{MHz})/(3\text{MHz})] = 10.84\text{dB}$

Conclusion: PASS


Chain 0




Copyright 2000-2005 Agilent Technologies




Copyright 2000-2005 Agilent Technologies

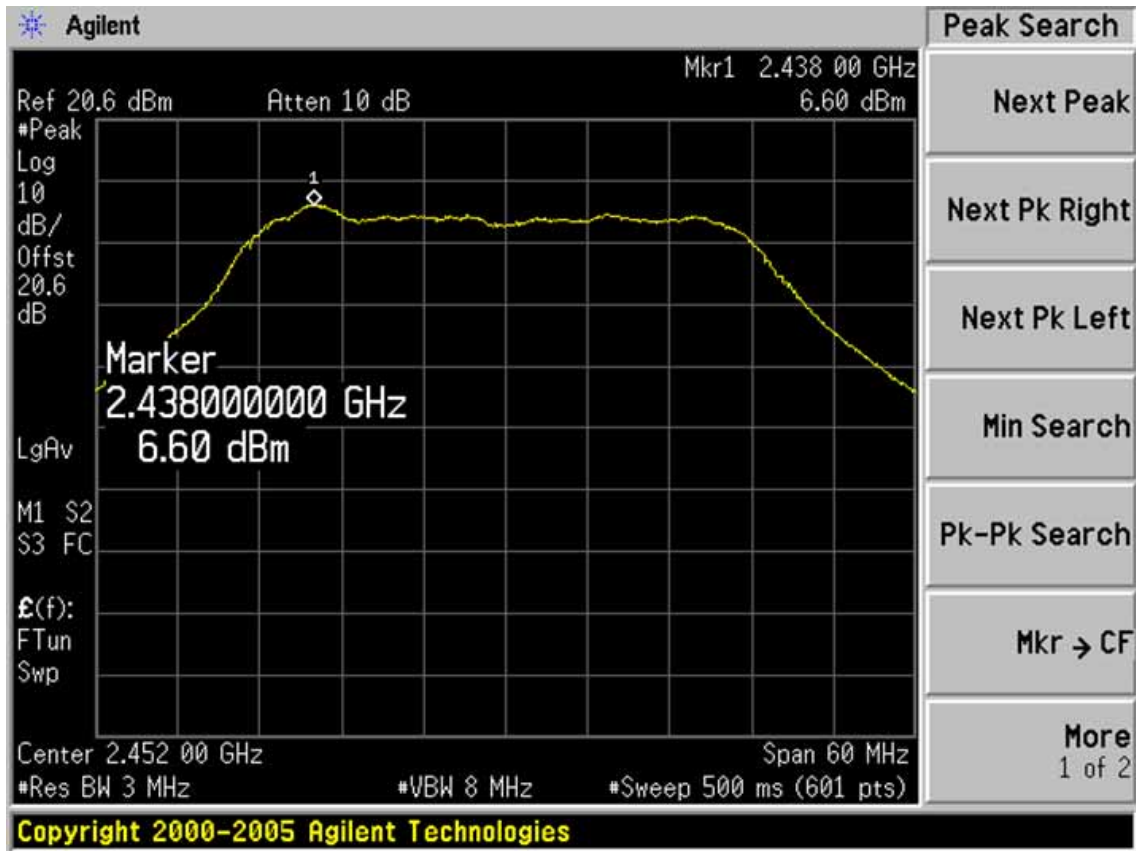

Chain 1

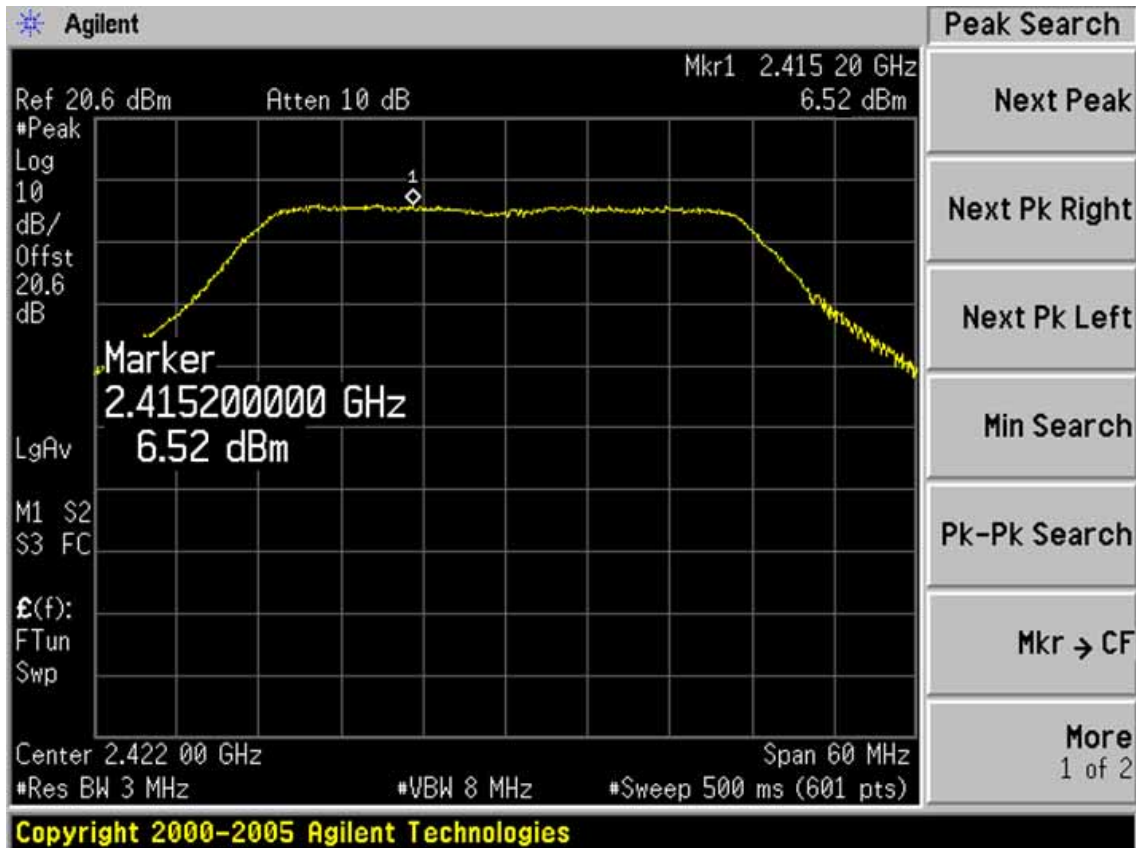

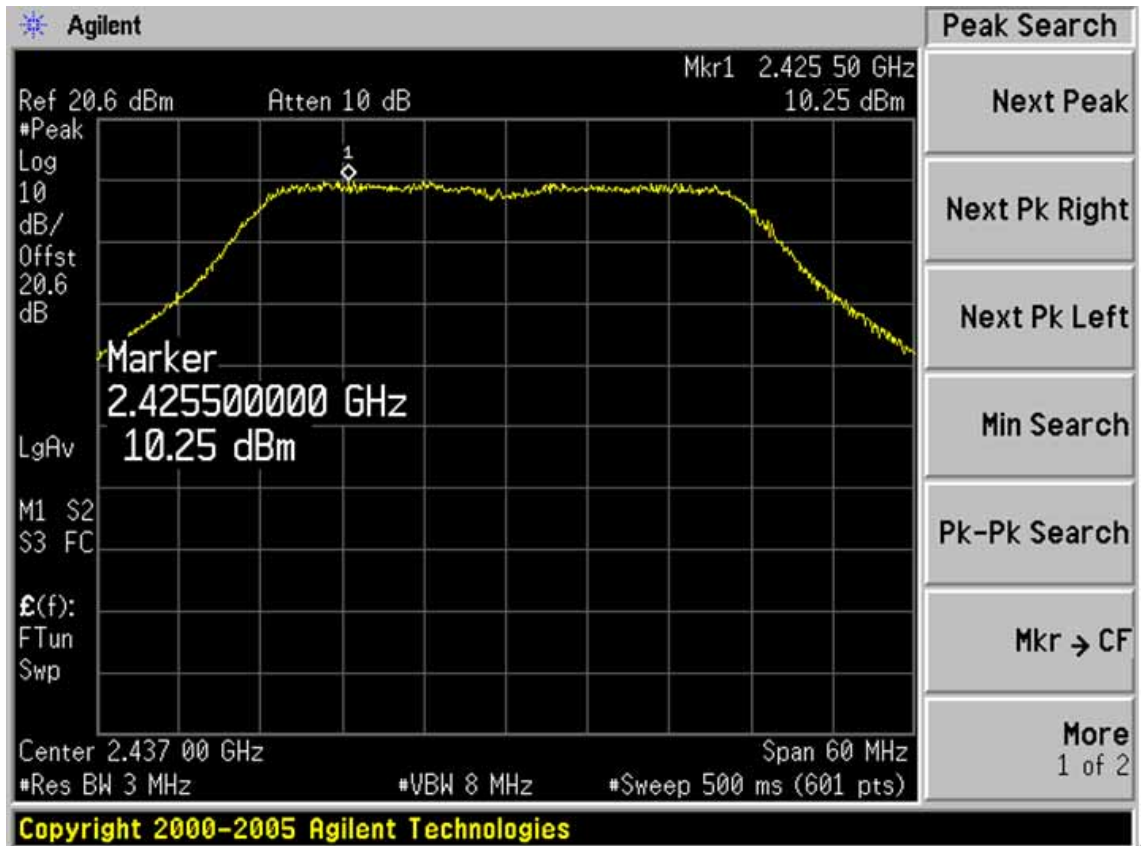

9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|--------------|-------------|------------|------------|---------------|
| 1. | Spectrum Analyzer | Agilent | E4446A | US44300459 | May.08, 11 | 1 Year |
| 2. | Attenuator | Agilent | 8491B | MY39262165 | May.08, 11 | 1 Year |
| 3. | RF Cable | Hubersuhner | SUCOFLEX102 | 28618/2 | May.08, 11 | 1Year |

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer device by 20dB attenuator.
- 2, Follow the test procedure as described in ANSI C.10: 2009 Clause 6.11.2.3 to measure out each test modes and chain's power density with 3KHz.



9.4. Test Results


| | | |
|--|--------------------|--------------------|
| EUT: 300 Mbps 4-port Wireless Broadband Router | | |
| M/N: SMCWBR14-N5 | | |
| Test date: 2011-07-08 | Pressure: 100.6kpa | Humidity: 60% |
| Tested by: Sunny-lu | Test site: RF site | Temperature : 25°C |

| Cable loss: 0.6dB | | Attenuator loss: 20dB | | Antenna Gain: 5.0dBi | |
|-------------------|------|---------------------------------------|---------------------------------------|--------------------------------------|---------------------|
| Mode | CH | Result | | | Limit (dBm/3KHz) |
| | | Chain0 Power density (dBm/3KHz) | Chain1 Power density (dBm/3KHz) | Total Power density (dBm/3KHz) | |
| 11b | CH1 | -8.34 | -8.59 | -5.45 | 8 |
| | CH6 | -9.54 | -9.80 | -6.66 | 8 |
| | CH11 | -8.90 | -10.25 | -6.51 | 8 |
| 11g | CH1 | -13.15 | -13.48 | -10.30 | 8 |
| | CH6 | -9.31 | -11.49 | -7.25 | 8 |
| | CH11 | -12.83 | -12.53 | -9.67 | 8 |
| 11n HT20 | CH1 | -13.27 | -13.82 | -10.53 | 8 |
| | CH6 | -9.39 | -11.61 | -7.35 | 8 |
| | CH11 | -14.34 | -13.14 | -10.69 | 8 |
| 11n HT40 | CH1 | -18.65 | -17.59 | -15.08 | 8 |
| | CH4 | -12.83 | -14.30 | -10.49 | 8 |
| | CH9 | -14.47 | -18.21 | -12.94 | 8 |
| Conclusion: PASS | | | | | |


Chain 0



Test Mode: IEEE 802.11b TX

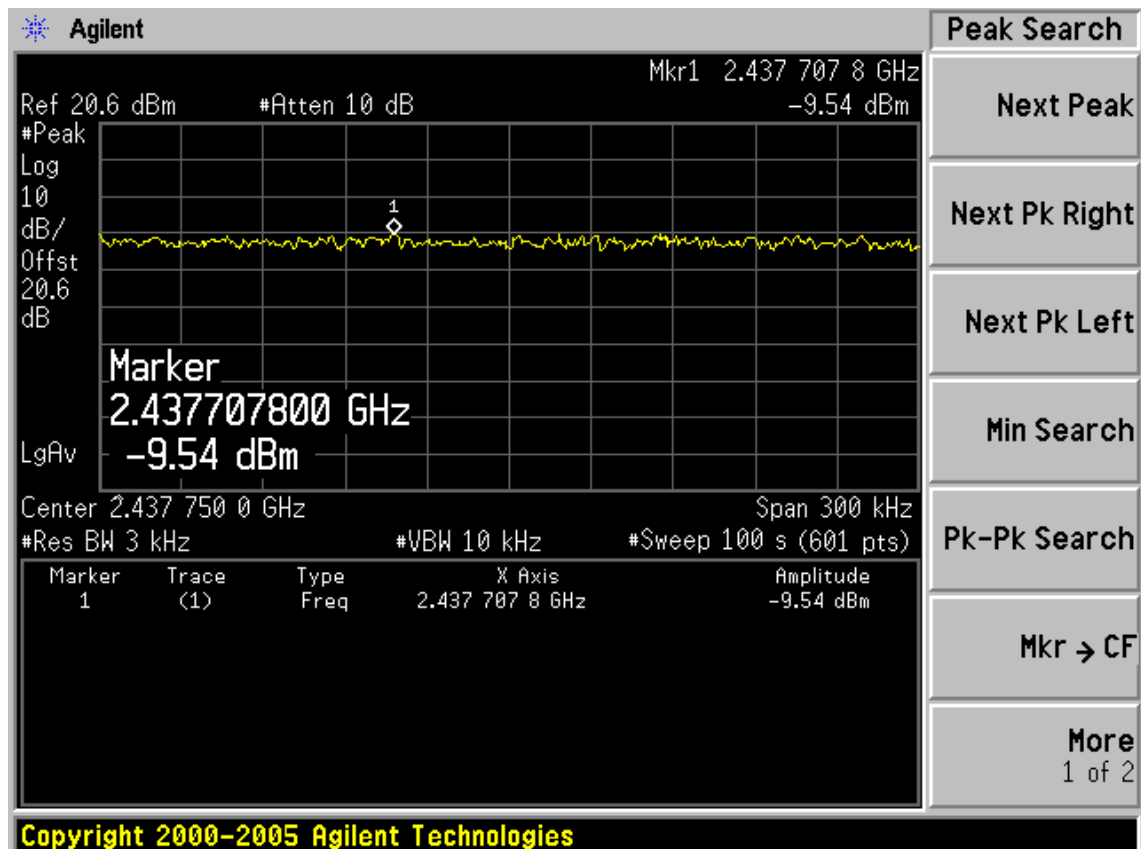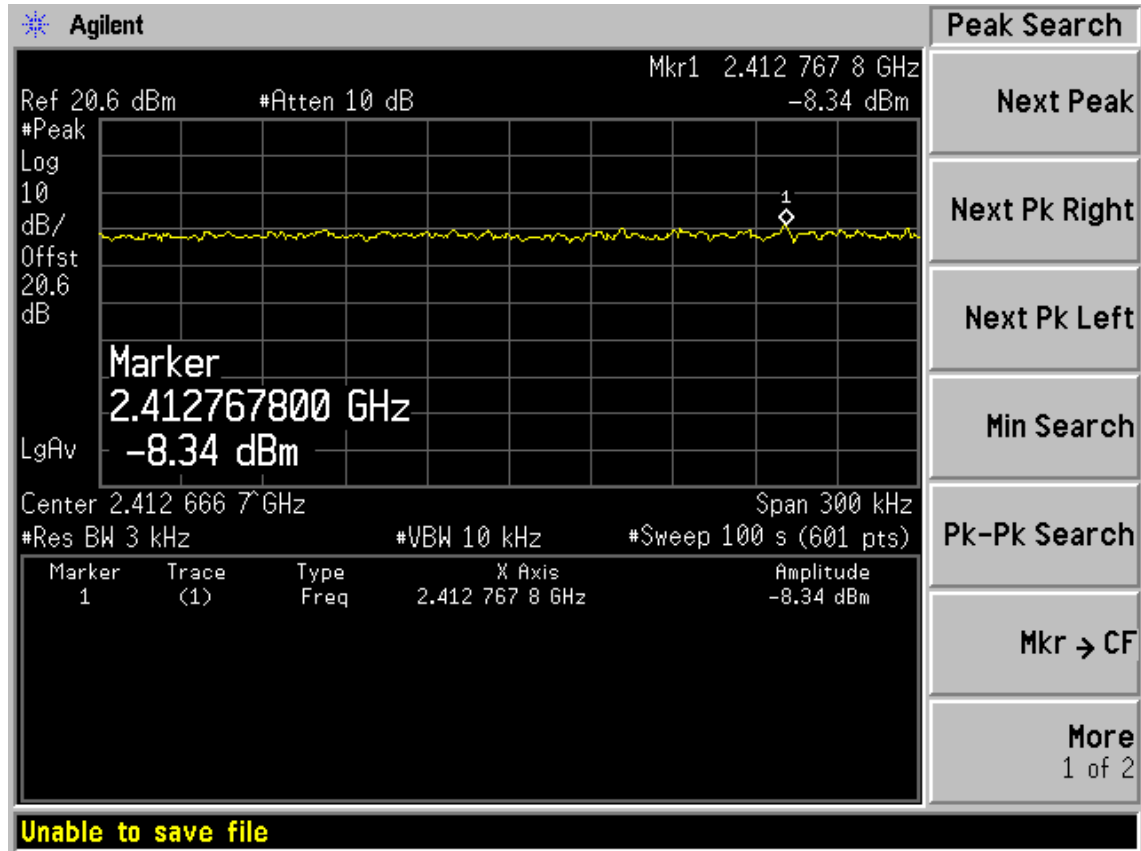


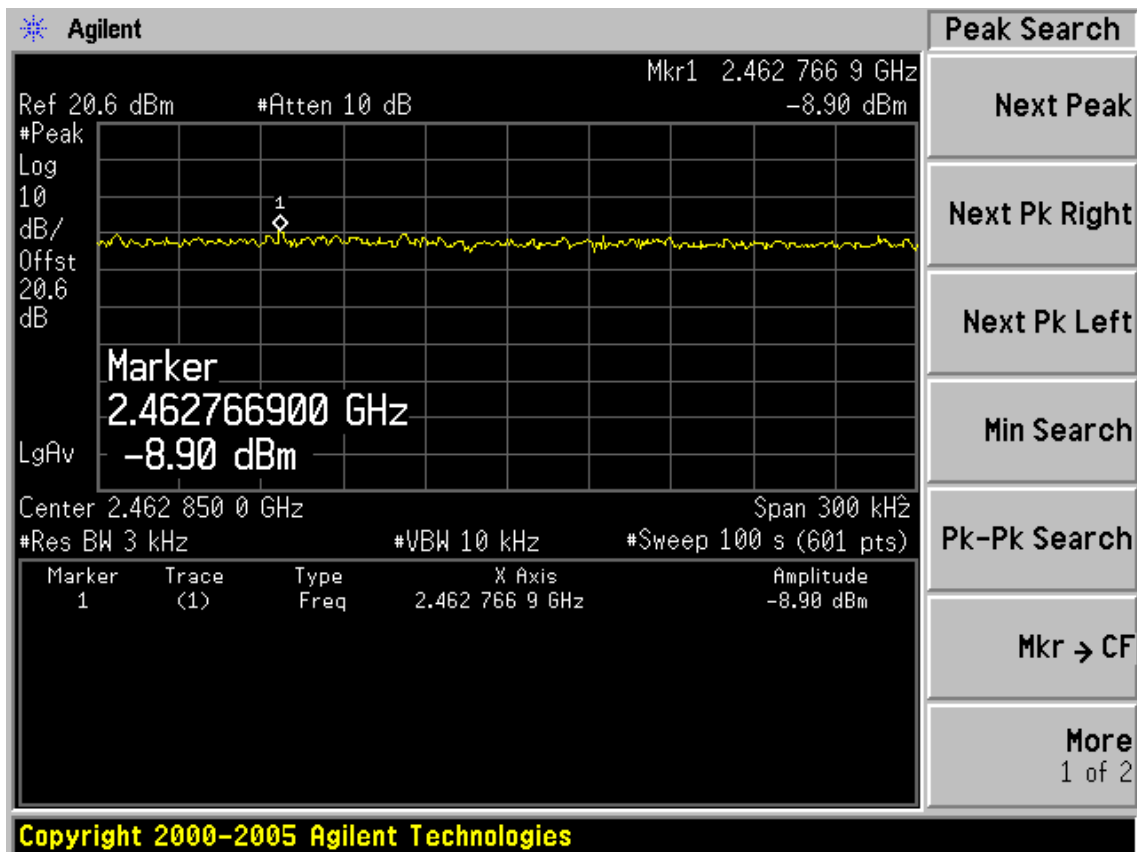



Test Mode: IEEE 802.11g TX

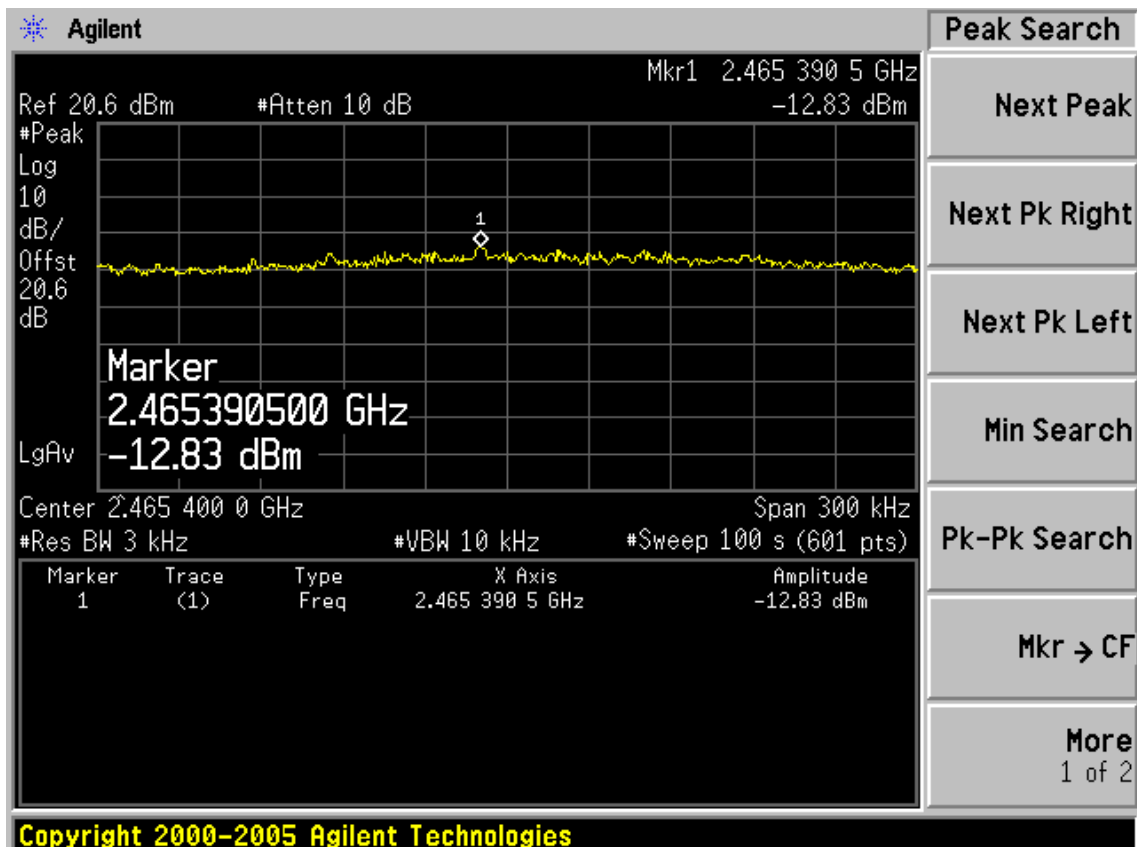

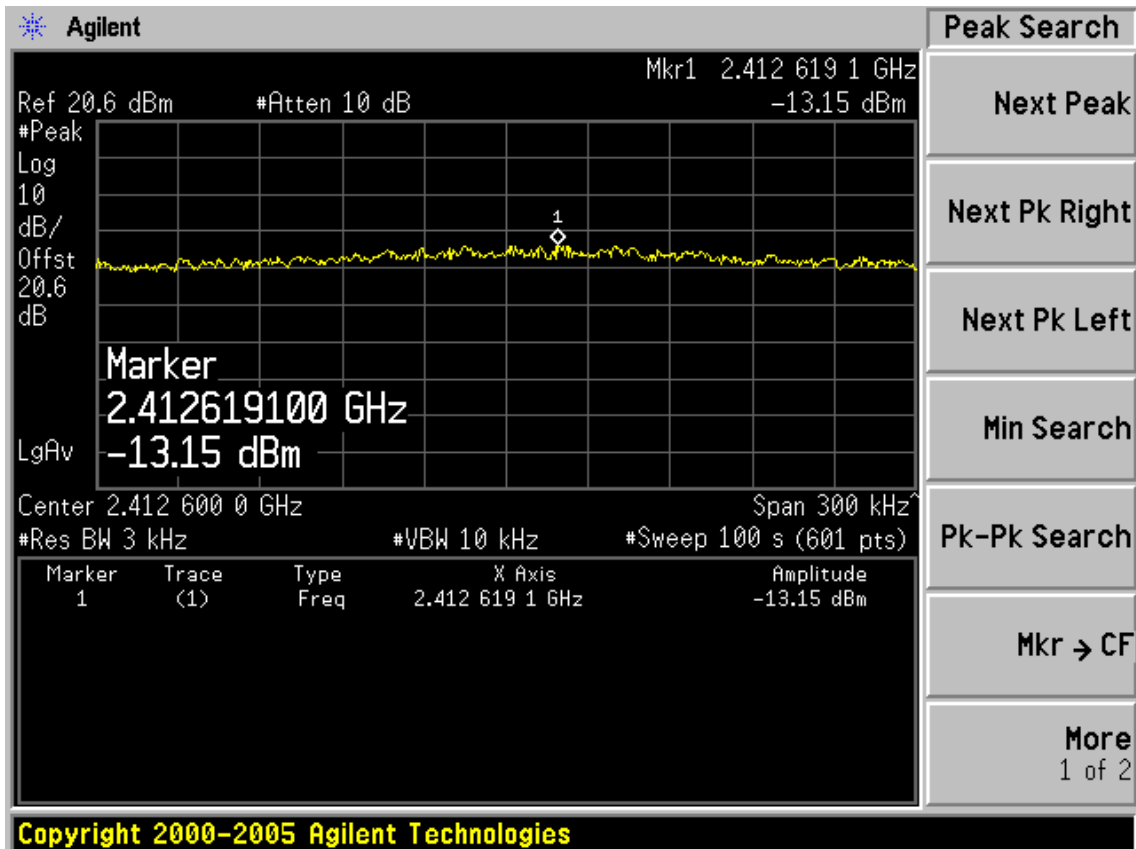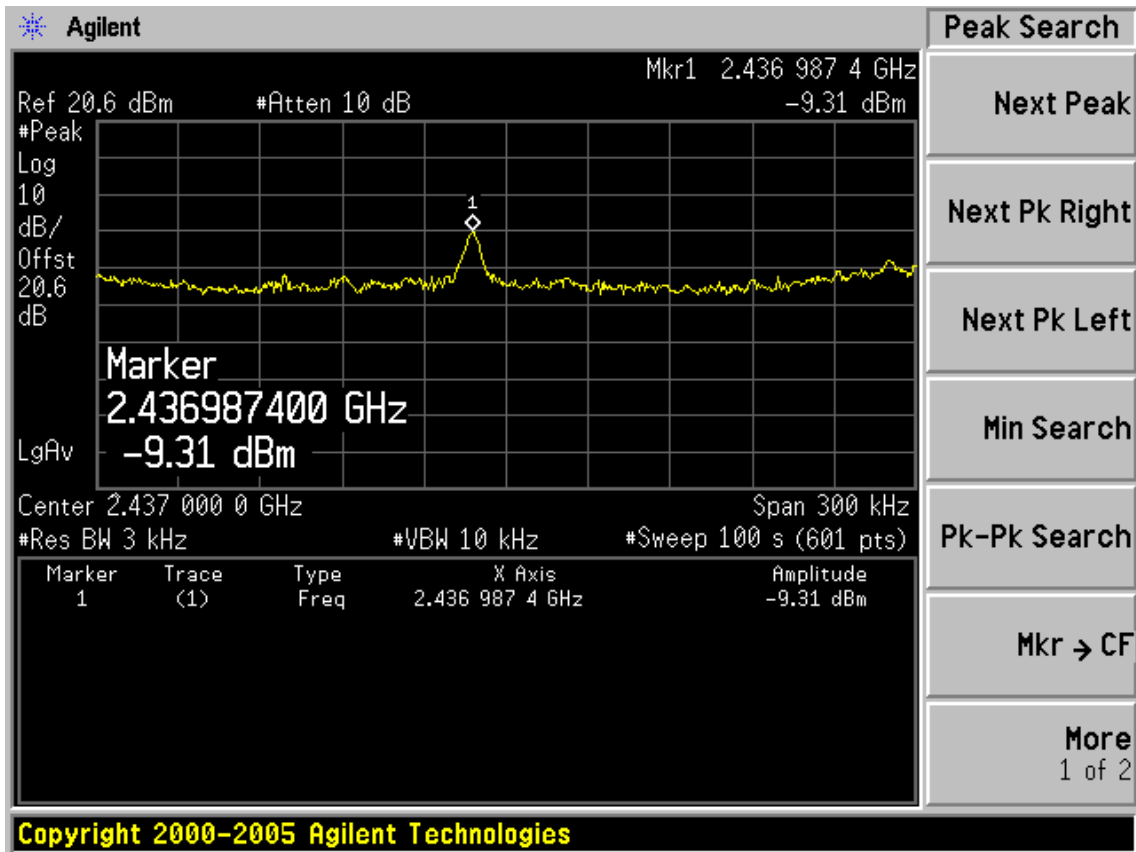


Test Mode: IEEE 802.11n HT20 TX

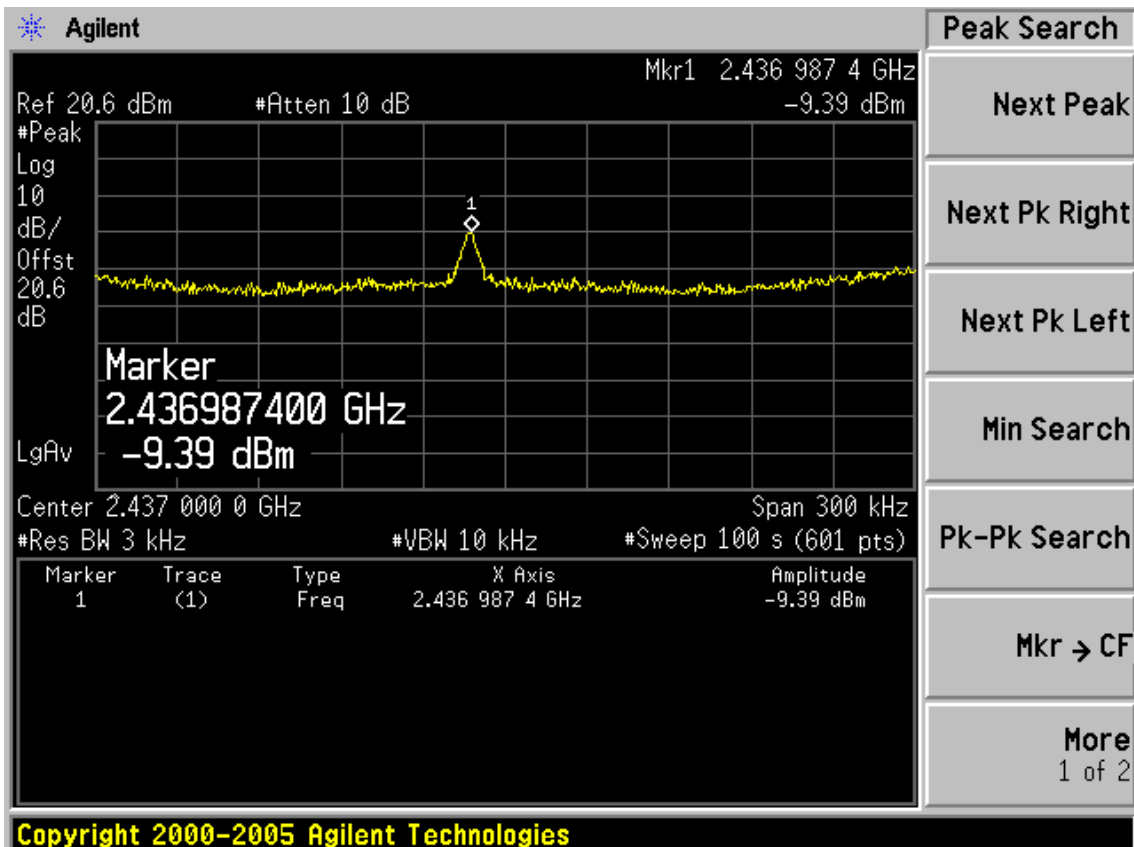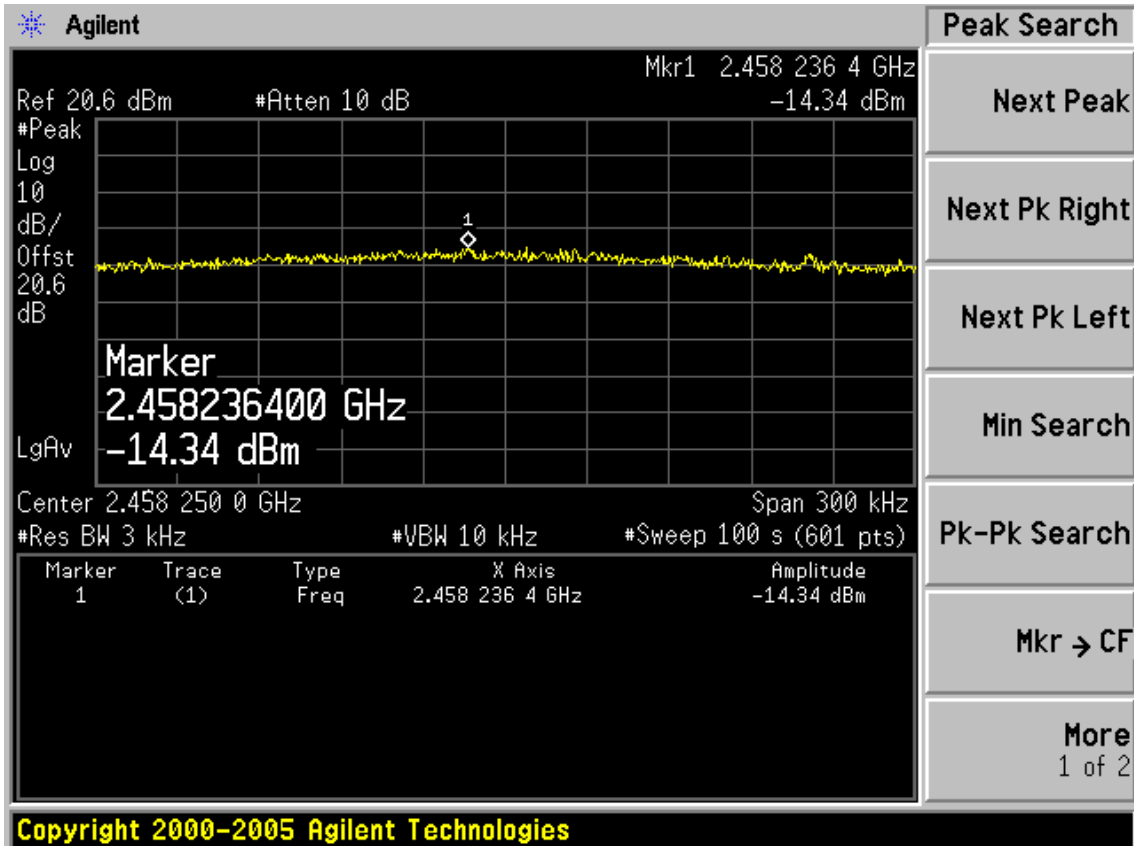


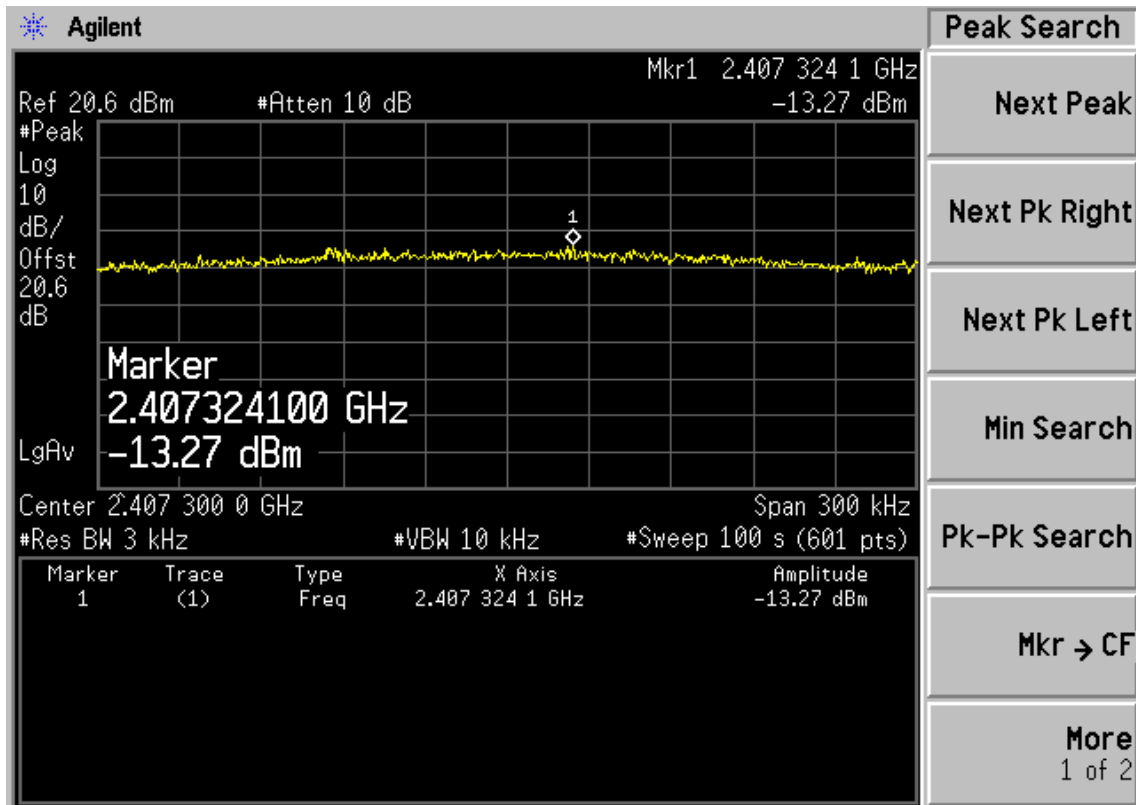


Copyright 2000-2005 Agilent Technologies

Test Mode: IEEE 802. 11n HT40 TX

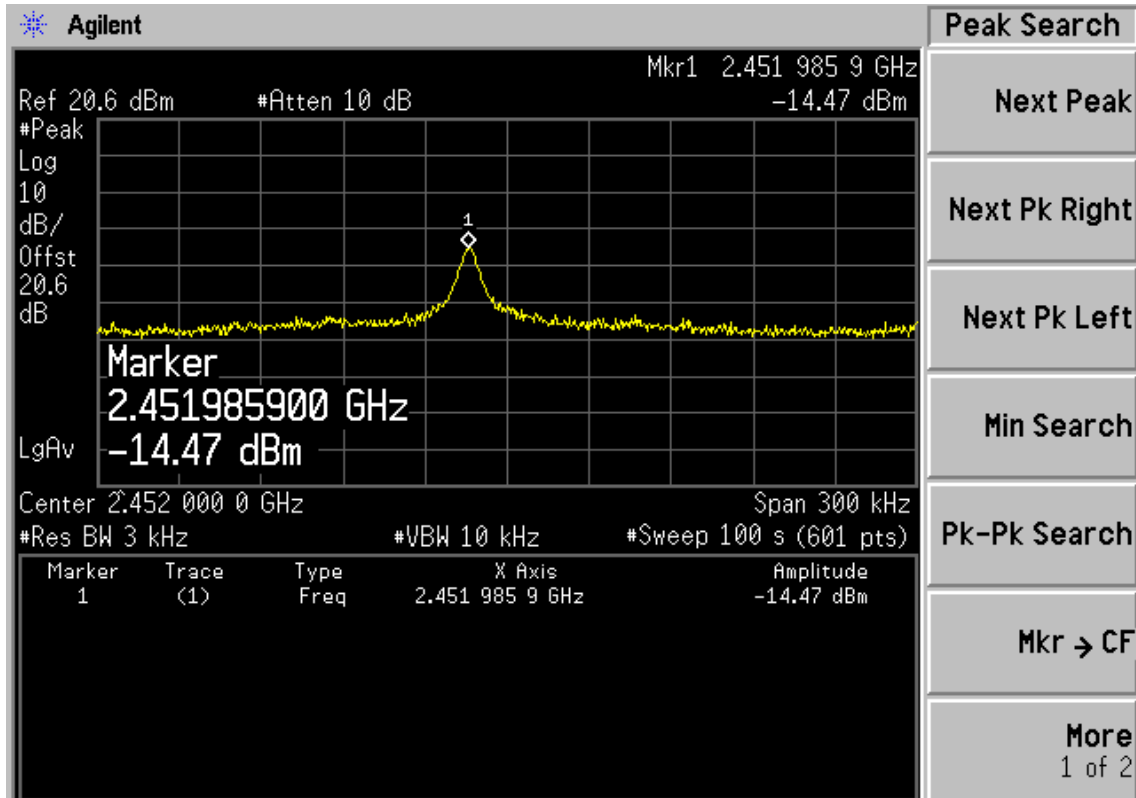


Copyright 2000-2005 Agilent Technologies

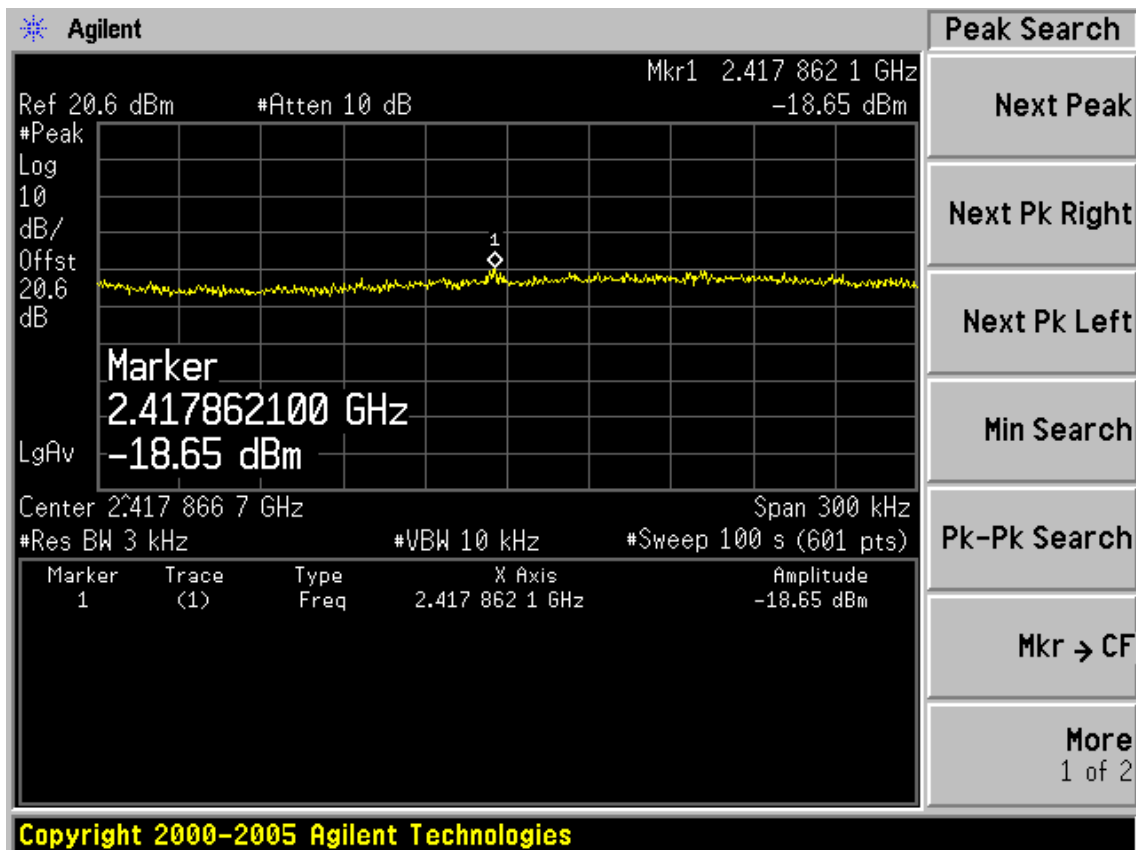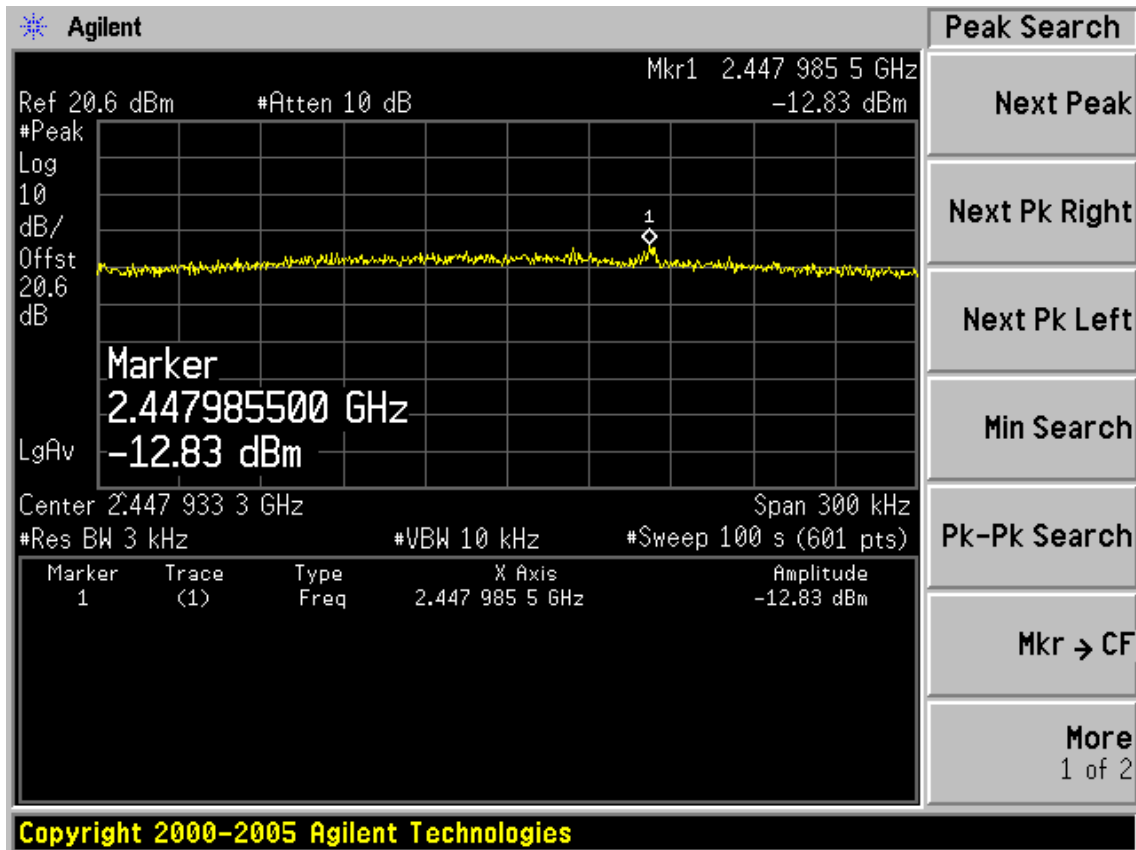


Chain 1


Test Mode: IEEE 802.11b TX

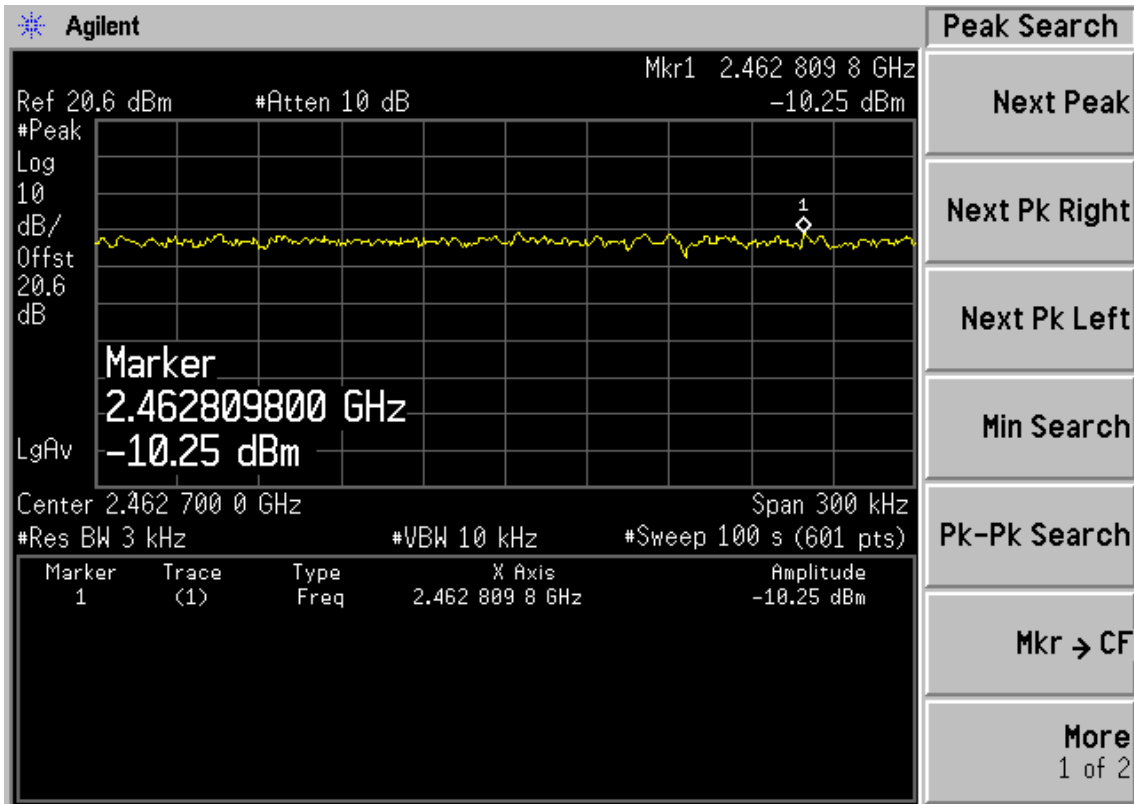

Copyright 2000-2005 Agilent Technologies

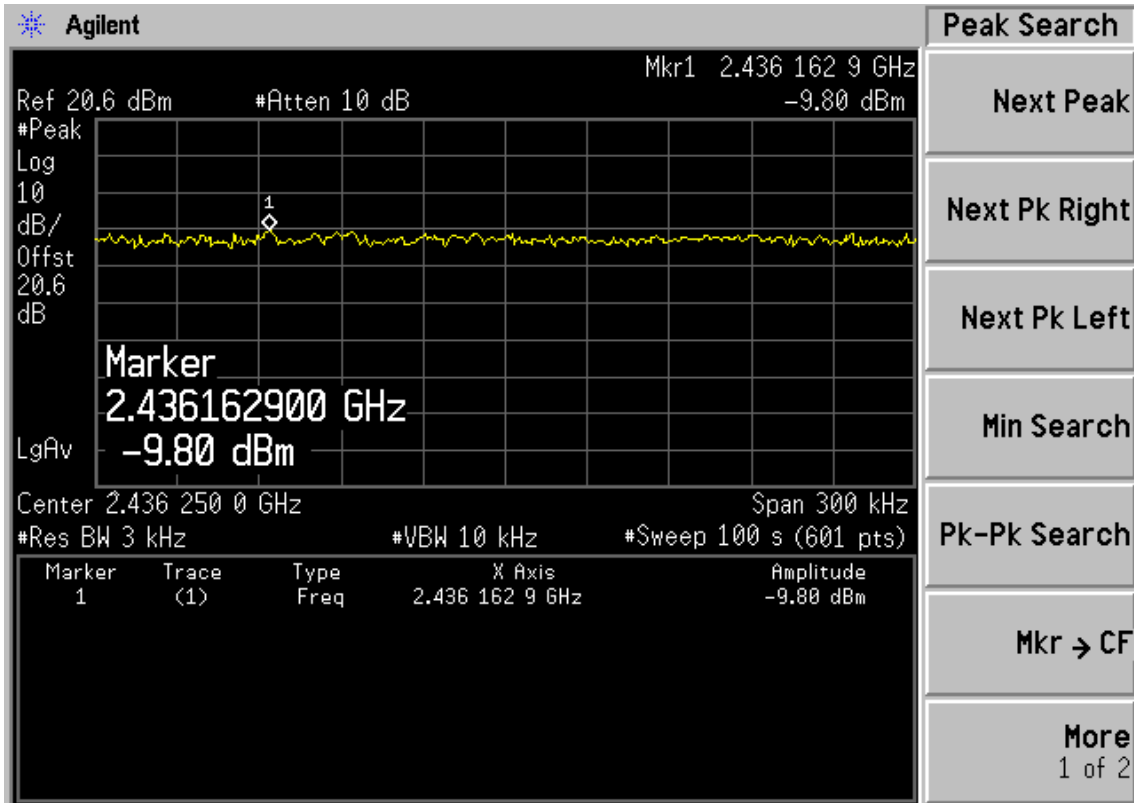


Copyright 2000-2005 Agilent Technologies


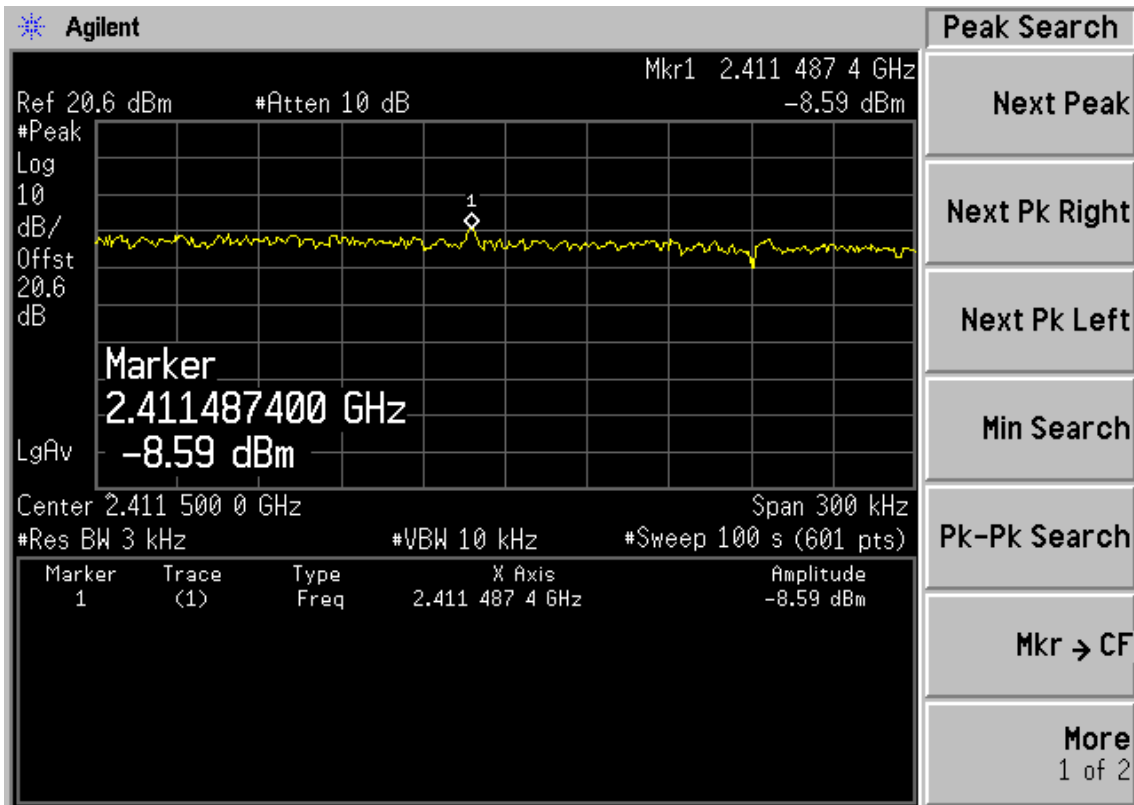


Copyright 2000-2005 Agilent Technologies


Test Mode: IEEE 802.11g TX

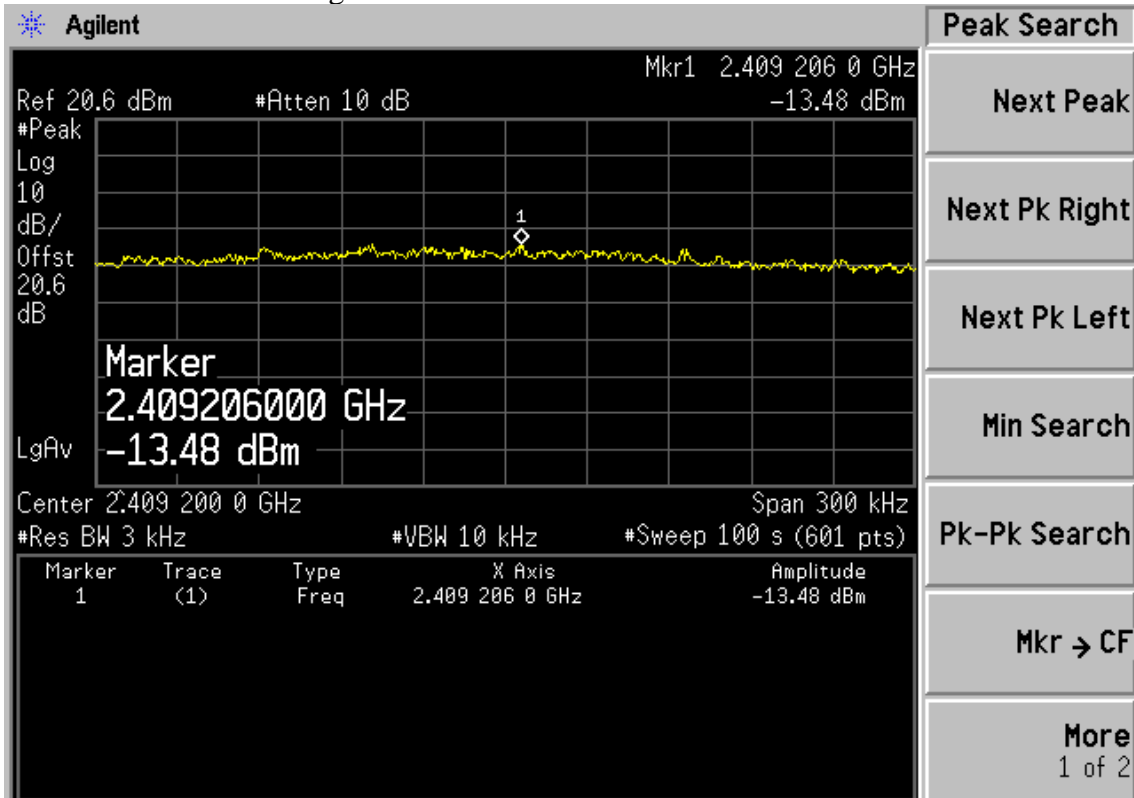


Copyright 2000-2005 Agilent Technologies

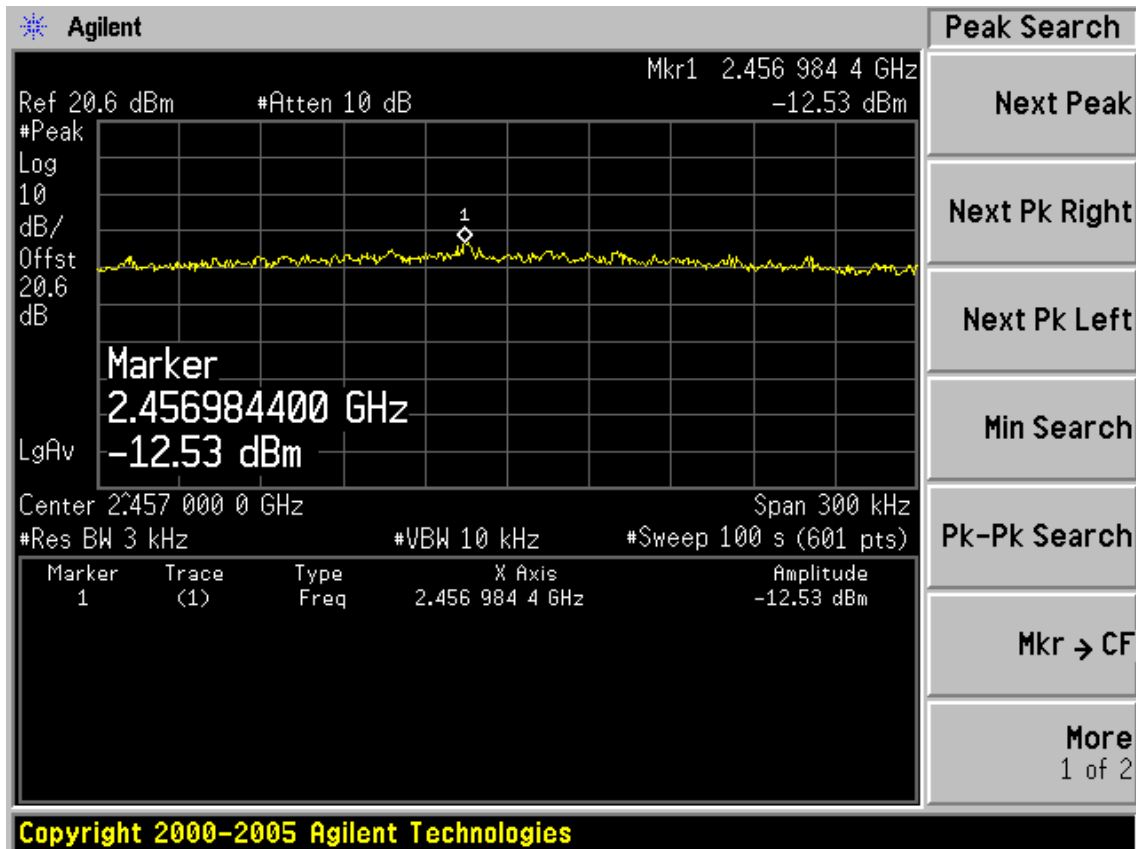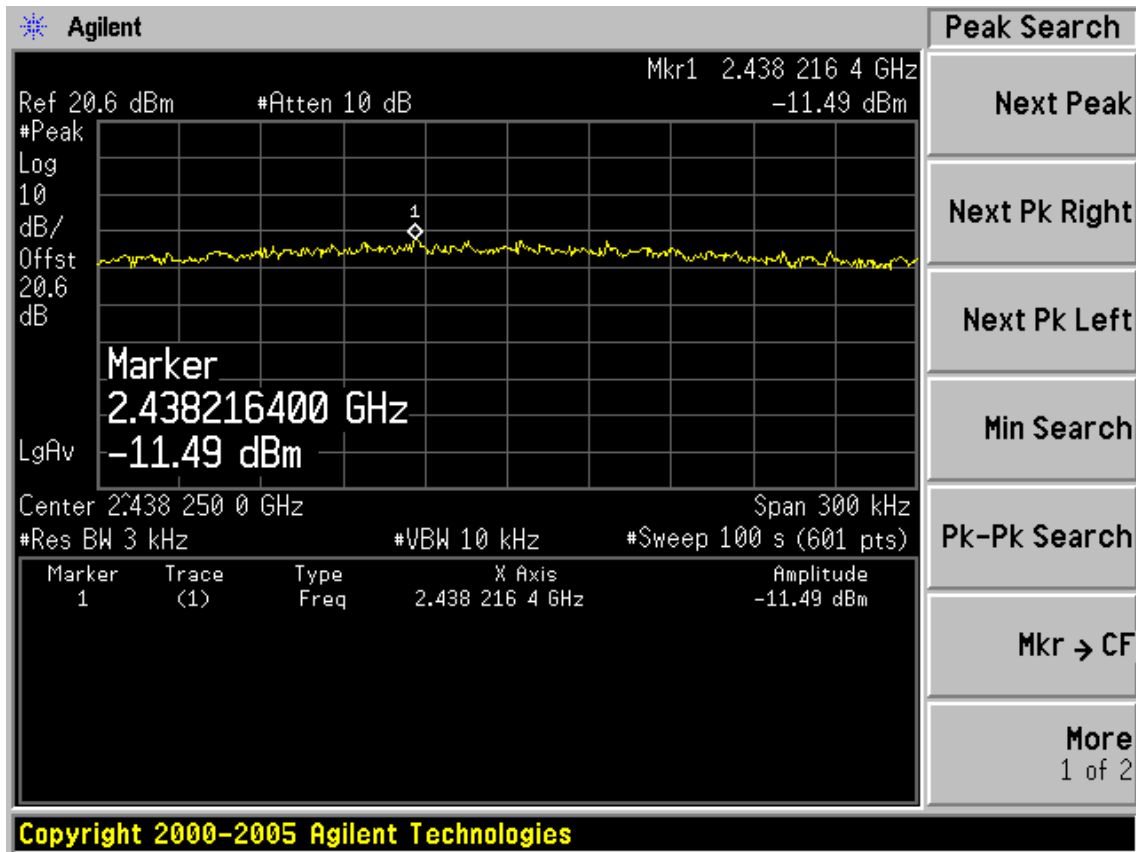


Test Mode: IEEE 802.11n HT20TX

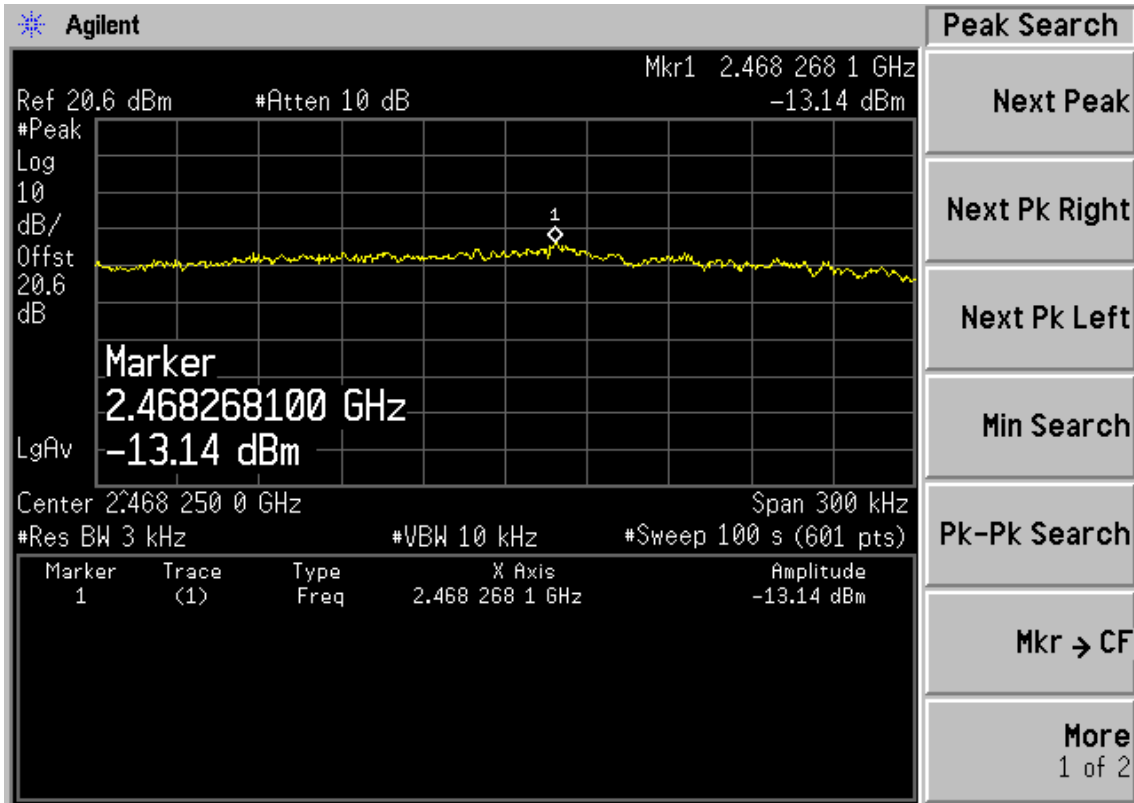

Copyright 2000-2005 Agilent Technologies

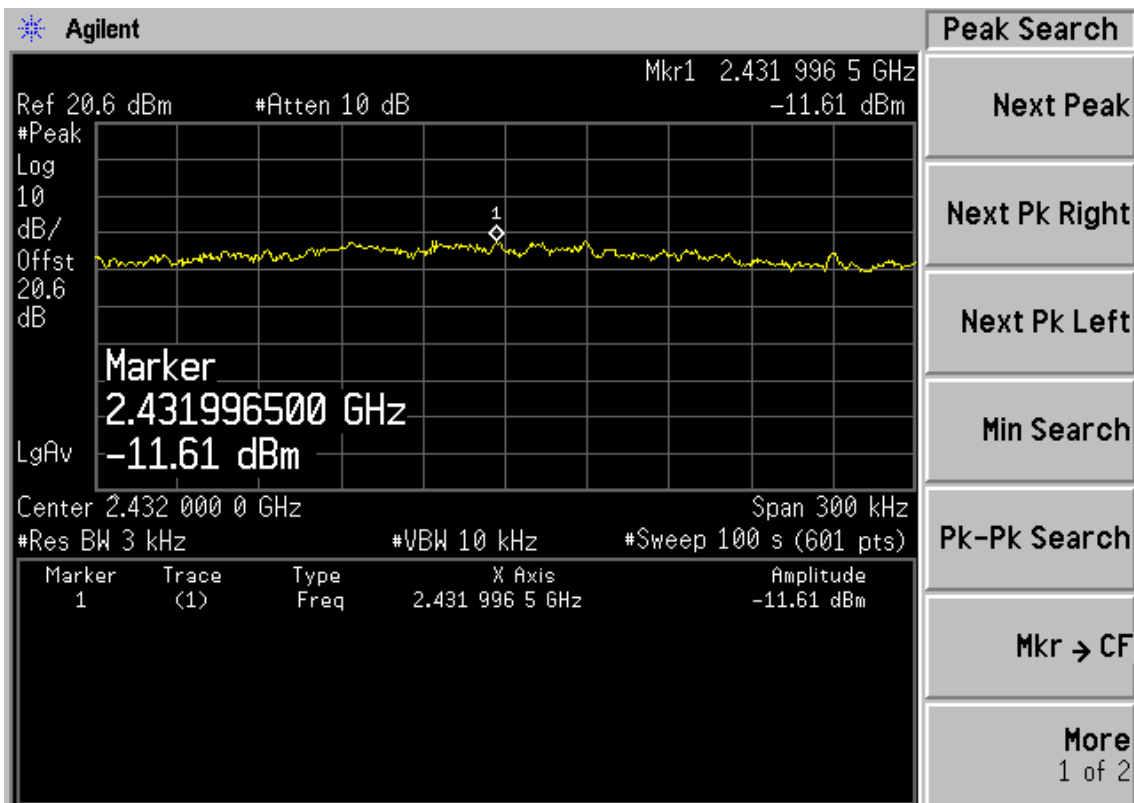


Copyright 2000-2005 Agilent Technologies


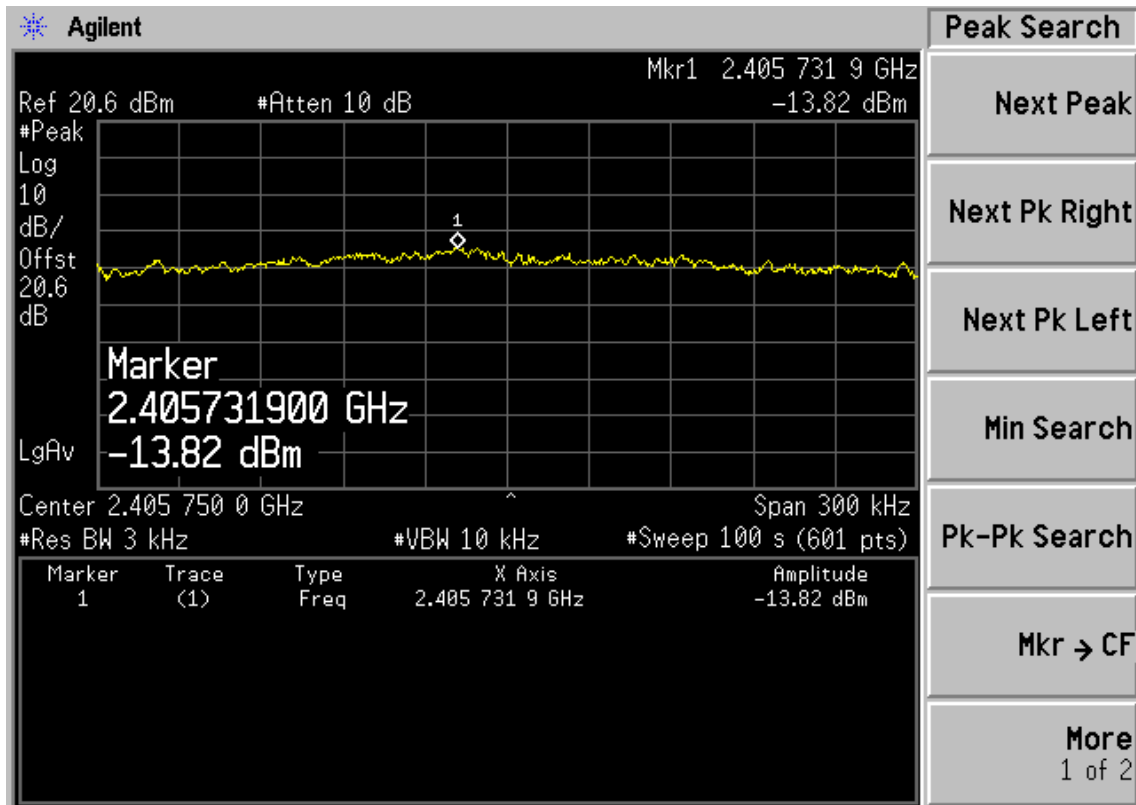


Copyright 2000-2005 Agilent Technologies

Test Mode: IEEE 802.11n HT20TX

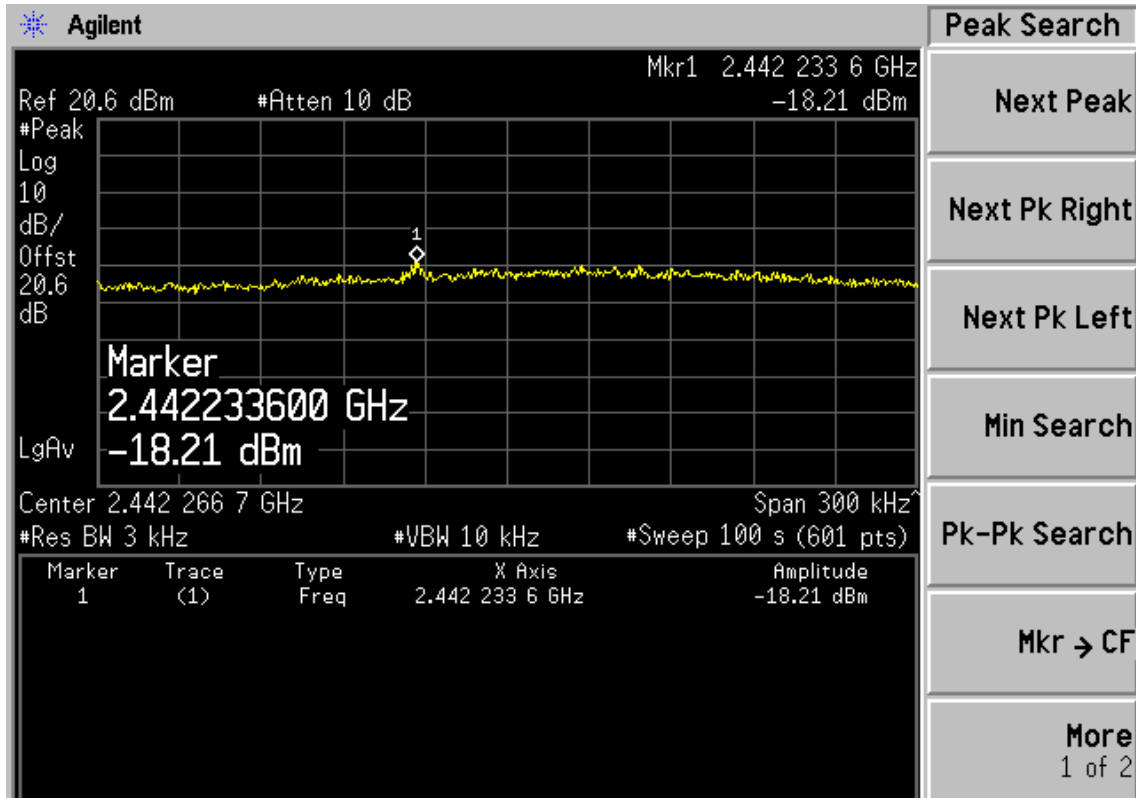

Copyright 2000-2005 Agilent Technologies

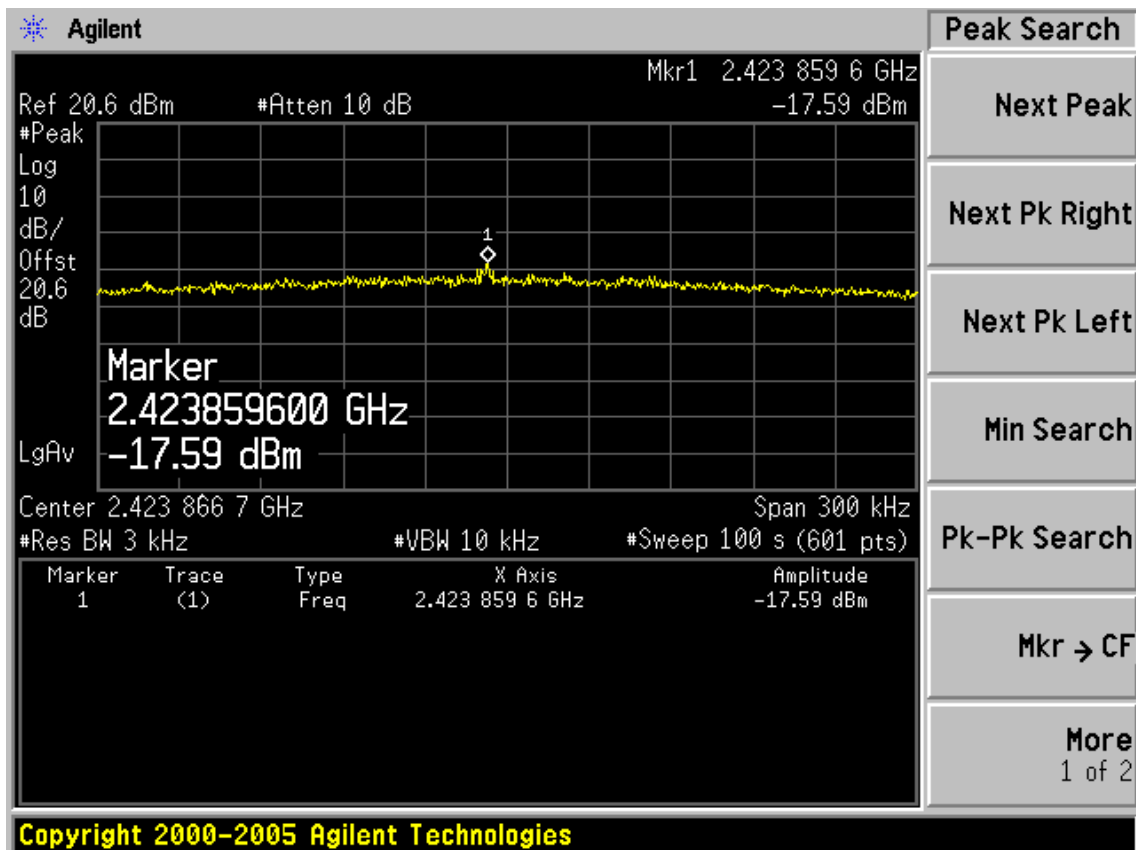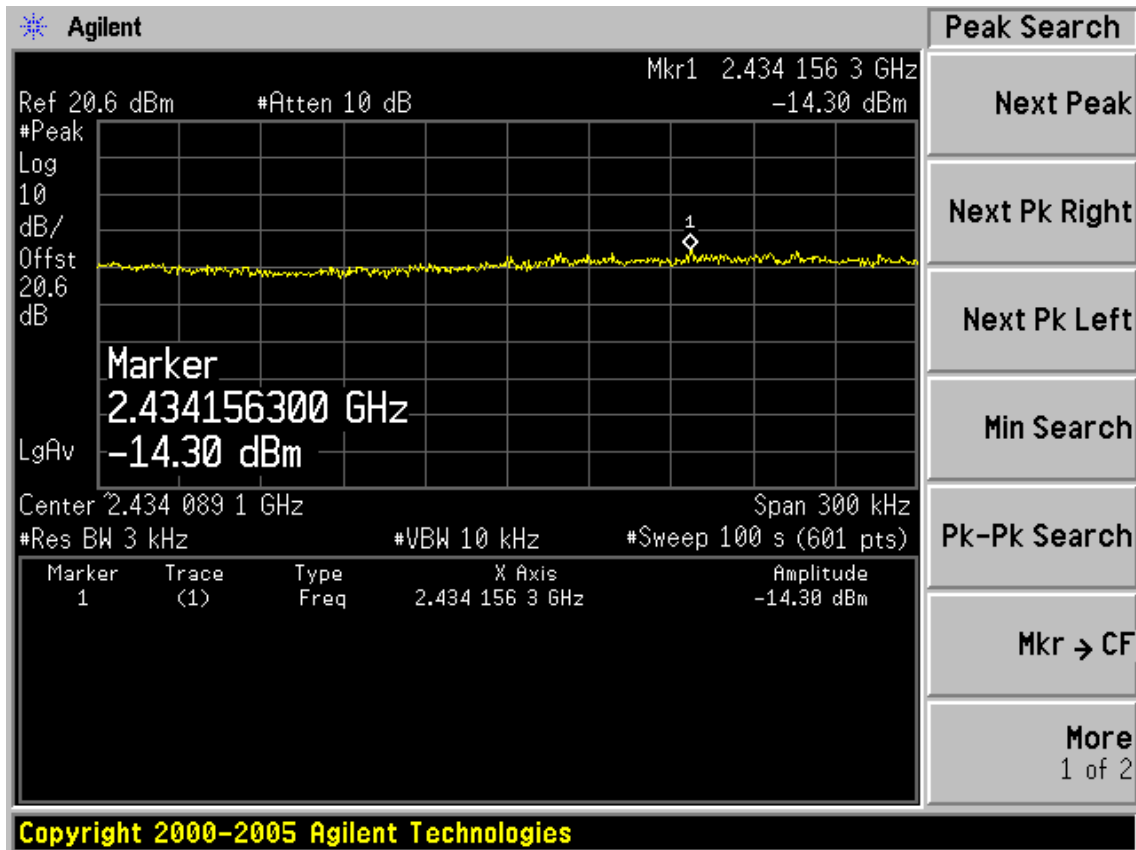

10. ANTENNA REQUIREMENT

10.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are MIMO 2X2 dipole antenna with SMA-B connector that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 5dBi.

11.MPE ESTIMATION

11.1.Limit for General Population/ Uncontrolled Exposures

| Frequency | Power density (mW/ cm ²) | Averaging time(minutes) |
|------------------|--------------------------------------|-------------------------|
| 300MHz----1.5GHz | F/1500 | 30 |
| 1.5GHz---100GHz | 1.0 | 30 |

| Frequency(MHz) | Power density (mW/ cm ²) | Averaging time(minutes) |
|----------------|--------------------------------------|-------------------------|
| 2412 | 1 | 30 |
| 2437 | 1 | 30 |
| 2462 | 1 | 30 |

Note: F= Frequency in MHz

11.2.2, Estimation Result

| Mode | CH | Frequency (MHz) | PK Output power (dBm) | Output power (mW) | Antenna Gain (dBi) | Antenna Gain(linear) | MPE |
|----------|----|-----------------|-----------------------|-------------------|--------------------|----------------------|-------|
| 11b | 1 | 2412 | 20.07 | 101.6 | 5 | 3.16 | 0.064 |
| | 6 | 2437 | 20.38 | 109.1 | 5 | 3.16 | 0.069 |
| | 11 | 2462 | 20.05 | 101.2 | 5 | 3.16 | 0.064 |
| 11g | 1 | 2412 | 20.45 | 110.9 | 5 | 3.16 | 0.070 |
| | 6 | 2437 | 22.36 | 172.2 | 5 | 3.16 | 0.108 |
| | 11 | 2462 | 20.11 | 102.6 | 5 | 3.16 | 0.065 |
| 11n HT20 | 1 | 2412 | 22.69 | 185.8 | 5 | 3.16 | 0.117 |
| | 6 | 2437 | 24.14 | 259.4 | 5 | 3.16 | 0.163 |
| | 11 | 2462 | 22.94 | 196.8 | 5 | 3.16 | 0.124 |
| 11n HT40 | 1 | 2422 | 20.52 | 112.7 | 5 | 3.16 | 0.071 |
| | 4 | 2437 | 25.14 | 326.6 | 5 | 3.16 | 0.206 |
| | 7 | 2452 | 20.25 | 105.9 | 5 | 3.16 | 0.067 |

Note: The estimation distance is 20cm

Remark :This a MIMO device,for 11b/g mode,we choose the chain which has the maximum power to estimate,for 11n mode,We use the total chain power to estimate.

12. DEVIATION TO TEST SPECIFICATIONS

[NONE]