

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-209-RWD-079

Reception No. : 2008003013

Applicant : LG Innotek Co., Ltd.

Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea

Manufacturer : LG Innotek Co., Ltd.

Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea

Type of Equipment : RF Module

FCC ID. : YZP-ATC5CPC001

Model Name : ATC5CPC001

Serial number : N/A

Total page of Report : 84 pages (including this page)

Date of Incoming : September 07, 2020

Date of issue : September 23, 2020


SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.





Tested by
Hyung-Kwon, Oh / Manager
ONETECH Corp.

Reviewed by
Tae-Ho, Kim / Senior Manager
ONETECH Corp.

Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY.....	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY.....	7
3. GENERAL INFORMATION.....	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	12
4. EUT MODIFICATIONS.....	12
5. SYSTEM TEST CONFIGURATION	13
5.1 JUSTIFICATION.....	13
5.2 PERIPHERAL EQUIPMENT	13
5.3 MODE OF OPERATION DURING THE TEST	14
5.4 CONFIGURATION OF TEST SYSTEM.....	17
5.5 ANTENNA REQUIREMENT	17
6. PRELIMINARY TEST	17
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	17
6.2 GENERAL RADIATED EMISSIONS TESTS	17
7. MINIMUM 20 DB BANDWIDTH.....	18
7.1 OPERATING ENVIRONMENT	18
7.2 TEST SET-UP	18
7.3 TEST DATE	18
7.4 TEST DATA FOR 1 MBPS.....	19
7.5 TEST DATA FOR 2 MBPS.....	21
7.6 TEST DATA FOR 3 MBPS.....	23
8. HOPPING FREQUENCY SEPARATION.....	25
8.1 OPERATING ENVIRONMENT	25
8.2 TEST SET-UP	25
8.3 TEST DATE	25

8.4 TEST DATA FOR 1 MBPS	26
8.5 TEST DATA FOR 2 MBPS	27
8.6 TEST DATA FOR 3 MBPS	28
9. NUMBER OF HOPPING CHANNELS	29
9.1 OPERATING ENVIRONMENT	29
9.2 TEST SET-UP	29
9.3 TEST DATE	29
9.4 TEST DATA FOR 1 MBPS	30
9.5 TEST DATA FOR 2 MBPS	33
9.6 TEST DATA FOR 3 MBPS	36
10. TIME OF OCCUPANCY	39
10.1 OPERATING ENVIRONMENT	39
10.2 TEST SET-UP	39
10.3 TEST DATE	39
10.4 TEST DATA FOR 1 MBPS	40
10.5 TEST DATA FOR 2 MBPS	42
10.6 TEST DATA FOR 3 MBPS	44
11. MAXIMUM PEAK OUTPUT POWER	46
11.1 OPERATING ENVIRONMENT	46
11.2 TEST SET-UP	46
11.3 TEST DATE	46
11.4 TEST DATA FOR 1 MBPS	47
11.5 TEST DATA FOR 2 MBPS	49
11.6 TEST DATA FOR 3 MBPS	51
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	53
12.1 OPERATING ENVIRONMENT	53
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	53
12.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	53
12.4 TEST DATE	53
12.5 TEST DATA FOR CONDUCTED EMISSION	54
12.5.1 Test data for 1 Mbps	54
12.5.2 Test data for 2 Mbps	60
12.5.3 Test data for 3 Mbps	66
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	72
12.6.1 Radiated Emission which fall in the Restricted Band.....	72
12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz.....	75

13. RADIATED EMISSION TEST	78
13.1 OPERATING ENVIRONMENT	78
13.2 TEST SET-UP	78
13.3 TEST DATE	79
13.4 TEST DATA FOR 30 MHZ ~ 1 GHZ	80
<i>13.4.1 Test data for Bluetooth Mode</i>	<i>80</i>
<i>13.4.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz)</i>	<i>81</i>
<i>13.4.3 Test data for Intermodulation Mode(Bluetooth + WLAN 5 GHz)</i>	<i>82</i>
13.5 TEST DATA FOR BELOW 30 MHZ	83
13.6 TEST DATA FOR ABOVE 1 GHZ	83
14. LIST OF TEST EQUIPMENT	84

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-209-RWD-079	September 23, 2020	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.
 Address : 26, Hanamsandan 5beon-ro Gwangsang-gu, Gwangju, 506-731, South Korea
 Contact Person : Jeong Inchang / Chief Research Engineer
 Telephone No. : +82-10-2326-9972
 FCC ID : YZP-ATC5CPC001
 Model Name : ATC5CPC001
 Brand Name : LG Innotek Co., Ltd.
 Serial Number : N/A
 Date : September 23, 2020

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Modular Transmitter, RF Module
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by DC Power.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Innotek Co., Ltd., Model ATC5CPC001 (referred to as the EUT in this report) is a RF Module. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	RF Module	
Temperature Range	-40 °C ~ 85 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 700 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 670 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz ~ 5 690 MHz (802.11ac(VHT80))
	5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))		
5 775 MHz (802.11ac(VHT80))		
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps
	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK)
		802.11g/n(HT20) OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)

RF OUTPUT POWER	Bluetooth LE	1 Mbps	4.25 dBm	
	Bluetooth	1 Mbps	4.85 dBm	
		2 Mbps	2.67 dBm	
		3 Mbps	3.07 dBm	
	WLAN 2.4 GHz	Antenna 0	16.05 dBm(802.11b)	
			16.48 dBm(802.11g)	
			14.62 dBm(802.11n_HT20)	
	WLAN 2.4 GHz	Antenna 1	16.06 dBm(802.11b)	
			18.22 dBm(802.11g)	
			16.20 dBm(802.11n_HT20)	
	WLAN 2.4 GHz	Multiple Antenna	18.29 dBm(802.11n_HT20)	
		5 150 MHz ~ 5 250 MHz Band	Antenna 0	17.28 dBm(802.11a)
				15.53 dBm(802.11n_HT20)
	15.75 dBm(802.11n_HT40)			
	15.03 dBm(802.11ac_VHT80)			
5 150 MHz ~ 5 250 MHz Band	Antenna 1	15.47 dBm(802.11a)		
		14.40 dBm(802.11n_HT20)		
		13.82 dBm(802.11n_HT40)		
		13.83 dBm(802.11ac_VHT80)		
5 150 MHz ~ 5 250 MHz Band	Multiple Antenna	18.04 dBm(802.11n_HT20)		
		17.87 dBm(802.11n_HT40)		
		17.48 dBm(802.11ac_VHT80)		
		17.48 dBm(802.11ac_VHT80)		
5 250 MHz ~ 5 350 MHz Band	Antenna 0	17.99 dBm(802.11a)		
		16.87 dBm(802.11n_HT20)		
		16.37 dBm(802.11n_HT40)		
		16.12 dBm(802.11ac_VHT80)		
	Antenna 1	15.36 dBm(802.11a)		
		14.18 dBm(802.11n_HT20)		
Antenna 1	14.12 dBm(802.11n_HT40)			
	14.13 dBm(802.11ac_VHT80)			
5 250 MHz ~ 5 350 MHz Band	Multiple Antenna	18.66 dBm(802.11n_HT20)		
		18.31 dBm(802.11n_HT40)		
		18.25 dBm(802.11ac_VHT80)		

RF OUTPUT POWER	5 470 MHz ~ 5 725 MHz Band	Antenna 0	16.96 dBm(802.11a) 15.76 dBm(802.11n_HT20) 17.47 dBm(802.11n_HT40) 17.14 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	14.04 dBm(802.11a) 12.84 dBm(802.11n_HT20) 15.23 dBm(802.11n_HT40) 15.09 dBm(802.11ac_VHT80)
		Antenna 1	16.39 dBm(802.11a) 15.41 dBm(802.11n_HT20) 15.85 dBm(802.11n_HT40) 15.55 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	14.74 dBm(802.11a) 13.52 dBm(802.11n_HT20) 14.19 dBm(802.11n_HT40) 14.34 dBm(802.11ac_VHT80)
		Multiple Antenna	18.58 dBm(802.11n_HT20) 19.73 dBm(802.11n_HT40) 19.44 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	16.23 dBm(802.11n_HT20) 17.76 dBm(802.11n_HT40) 17.75 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 725 MHz ~ 5 850 MHz Band	Antenna 0	15.67 dBm(802.11a) 14.59 dBm(802.11n_HT20) 15.34 dBm(802.11n_HT40) 14.72 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	6.57 dBm(802.11a) 5.97 dBm(802.11n_HT20) 2.88 dBm(802.11n_HT40) -0.70 dBm(802.11ac_VHT80)
		Antenna 1	15.88 dBm(802.11a) 14.57 dBm(802.11n_HT20) 14.40 dBm(802.11n_HT40) 13.83 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	7.26 dBm(802.11a) 6.69 dBm(802.11n_HT20) 2.22 dBm(802.11n_HT40) -1.34 dBm(802.11ac_VHT80)
		Multiple Antenna	17.57 dBm(802.11n_HT20) 17.92 dBm(802.11n_HT40) 17.31 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	9.33 dBm(802.11n_HT20) 5.59 dBm(802.11n_HT40) 2.01 dBm(802.11ac_VHT80)

ANTENNA TYPE	PCB Antenna			
ANTENNA GAIN	Bluetooth LE	1.49 dBi		
	Bluetooth	1.49 dBi		
	WLAN 2.4 GHz	Antenna 0	1.49 dBi	
		Antenna 1	0.14 dBi	
		Multiple Antenna	3.88 dBi	
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	-2.10 dBi	
		Antenna 1	-6.66 dBi	
		Multiple Antenna	-0.80 dBi	
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	-2.10 dBi	
		Antenna 1	-6.66 dBi	
		Multiple Antenna	-0.80 dBi	
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	-2.82 dBi	
		Antenna 1	-6.82 dBi	
		Multiple Antenna	-1.36 dBi	
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	-2.61 dBi	
		Antenna 1	-7.60 dBi	
		Multiple Antenna	-1.41 dBi	
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		37.4 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Innotek Co., Ltd.	RBHP-B216C_RDK_Rev0.2	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
ATC5CPC001	LG Innotek Co., Ltd.	RF Module (EUT)	
HP Probook	HP	Notebook PC	EUT
PPP009L-E	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	
RBHX-Q20XX_Carrier_Interface_Rev.0.2	LG Inntek Co., LTD.	Interface Board	EUT
PWS-3003D	Protek	DC Power Supply	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 441 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Channel List (Bluetooth)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	27	2 429.00	54	2 456.00
1	2 403.00	28	2 430.00	55	2 457.00
2	2 404.00	29	2 431.00	56	2 458.00
3	2 405.00	30	2 432.00	57	2 459.00
4	2 406.00	31	2 433.00	58	2 460.00
5	2 407.00	32	2 434.00	59	2 461.00
6	2 408.00	33	2 435.00	60	2 462.00
7	2 409.00	34	2 436.00	61	2 463.00
8	2 410.00	35	2 437.00	62	2 464.00
9	2 411.00	36	2 438.00	63	2 465.00
10	2 412.00	37	2 439.00	64	2 466.00
11	2 413.00	38	2 440.00	65	2 467.00
12	2 414.00	39	2 441.00	66	2 468.00
13	2 415.00	40	2 442.00	67	2 469.00
14	2 416.00	41	2 443.00	68	2 470.00
15	2 417.00	42	2 444.00	69	2 471.00
16	2 418.00	43	2 445.00	70	2 472.00
17	2 419.00	44	2 446.00	71	2 473.00
18	2 420.00	45	2 447.00	72	2 474.00
19	2 421.00	46	2 448.00	73	2 475.00
20	2 422.00	47	2 449.00	74	2 476.00
21	2 423.00	48	2 450.00	75	2 477.00
22	2 424.00	49	2 451.00	76	2 478.00
23	2 425.00	50	2 452.00	77	2 479.00
24	2 426.00	51	2 453.00	78	2 480.00
25	2 427.00	52	2 454.00		
26	2 428.00	53	2 455.00		


- Duty Cycle


Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth [1 Mbps]	2.88	0.86	77.01	1.13
Bluetooth [2 Mbps]	2.90	0.86	77.13	1.13
Bluetooth [3 Mbps]	2.88	0.86	77.01	1.13

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100


Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

- Test Plot

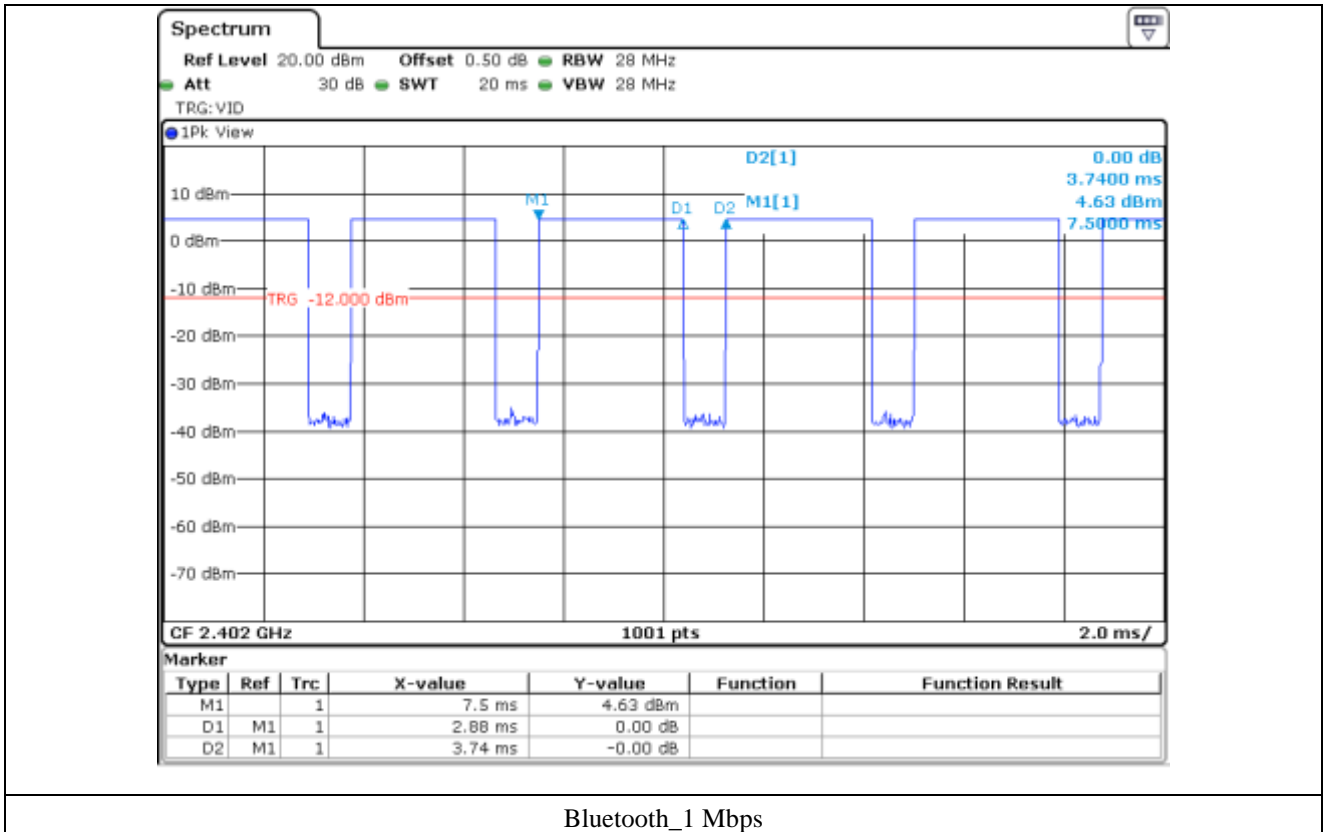

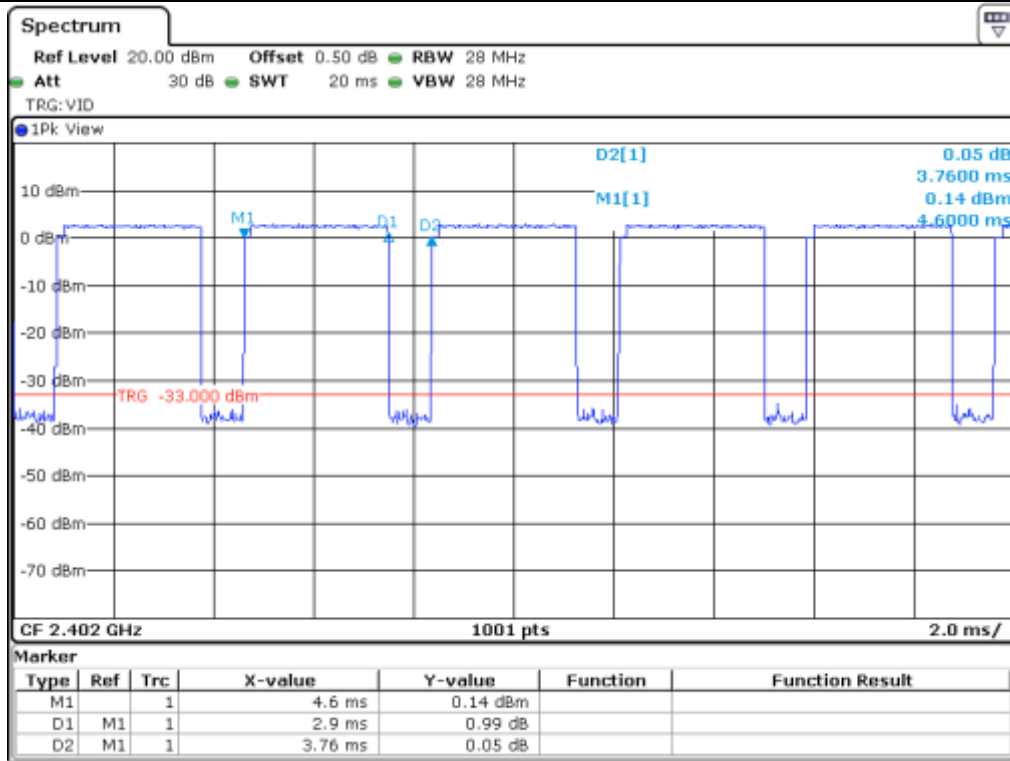

Bluetooth_2 Mbps

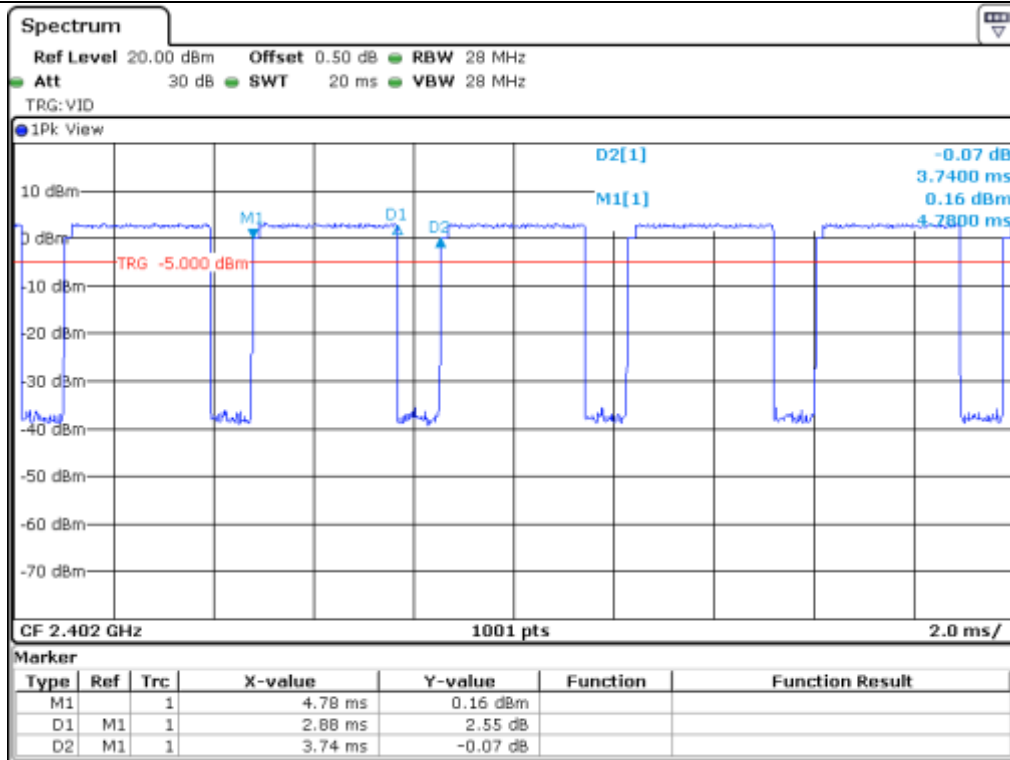

Bluetooth_3 Mbps

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC Power.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB Antenna on the main board in the EUT, The manufacturer has designed a structure that connects to the antenna using a unique coupling connector of the MCX type. So no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by DC Power.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 1 % to 5 % of the OBW, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

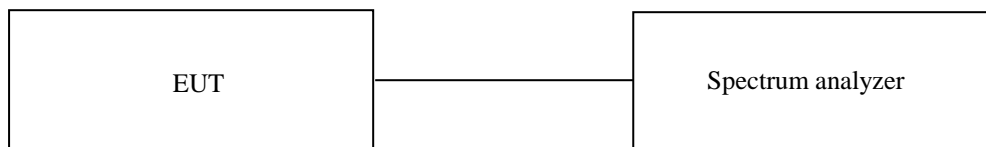


7.3 Test Date


September 07, 2020 ~ September 11, 2020

7.4 Test data for 1 Mbps


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	764.20
Middle	2 441.00	764.20
High	2 480.00	764.20

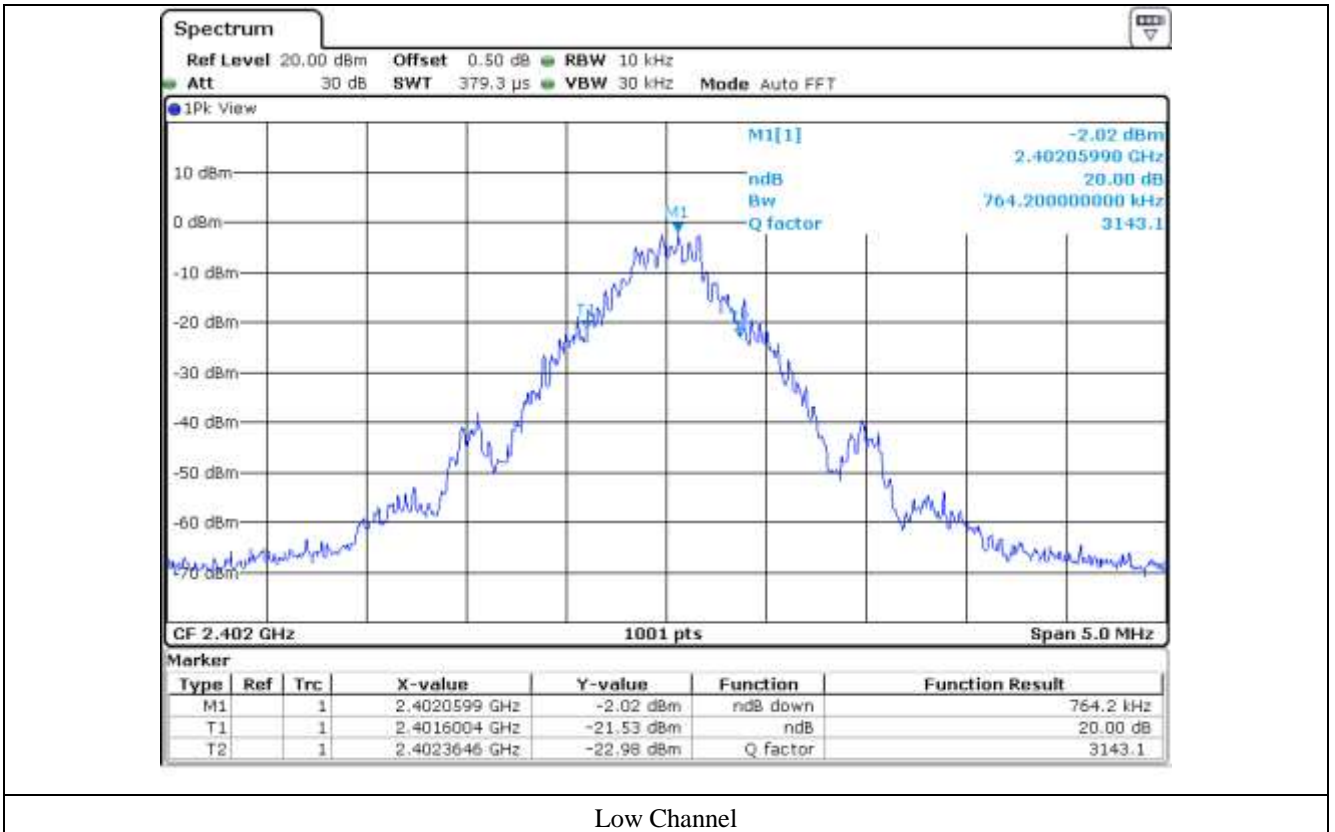

Low Channel

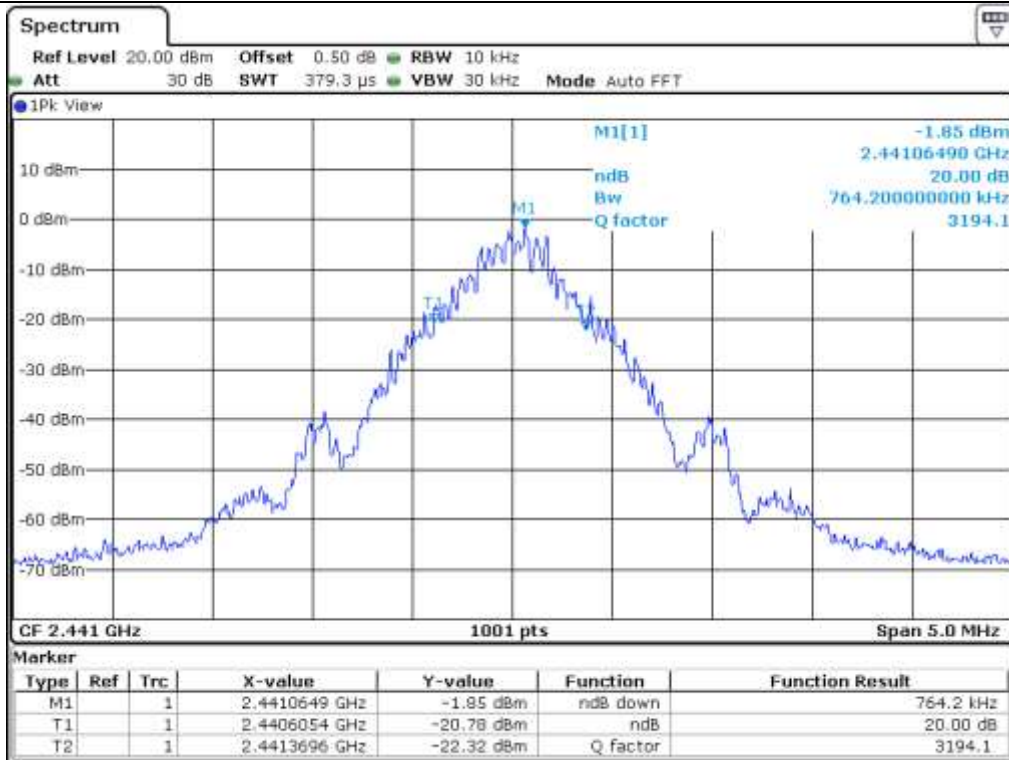


Middle Channel

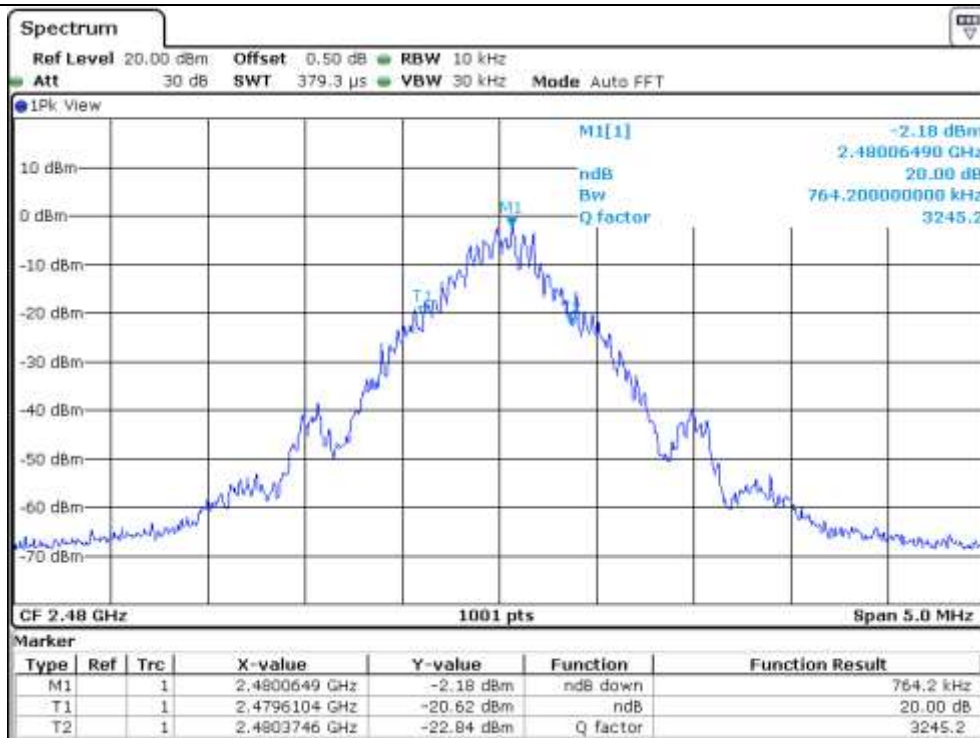


High Channel


7.5 Test data for 2 Mbps

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 338.70
Middle	2 441.00	1 353.60
High	2 480.00	1 358.60

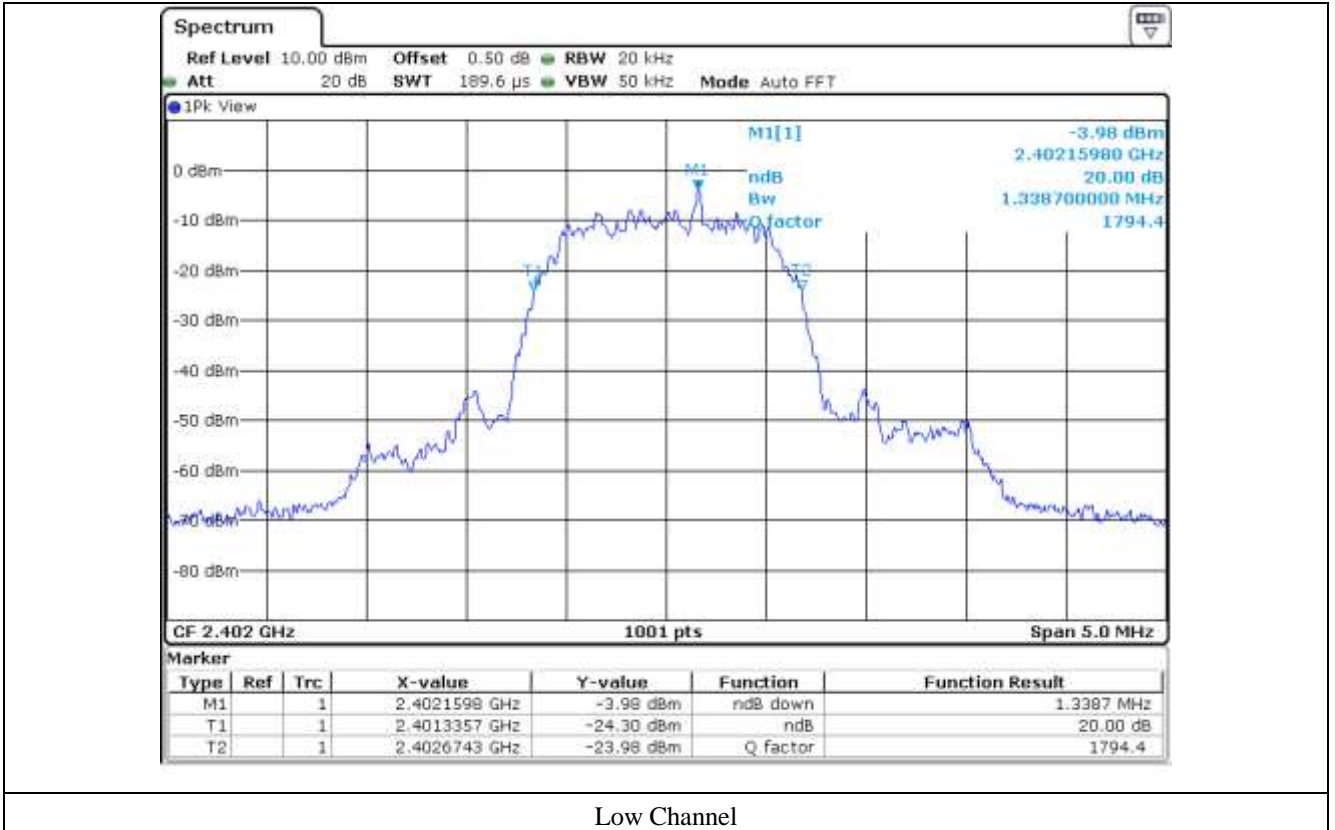

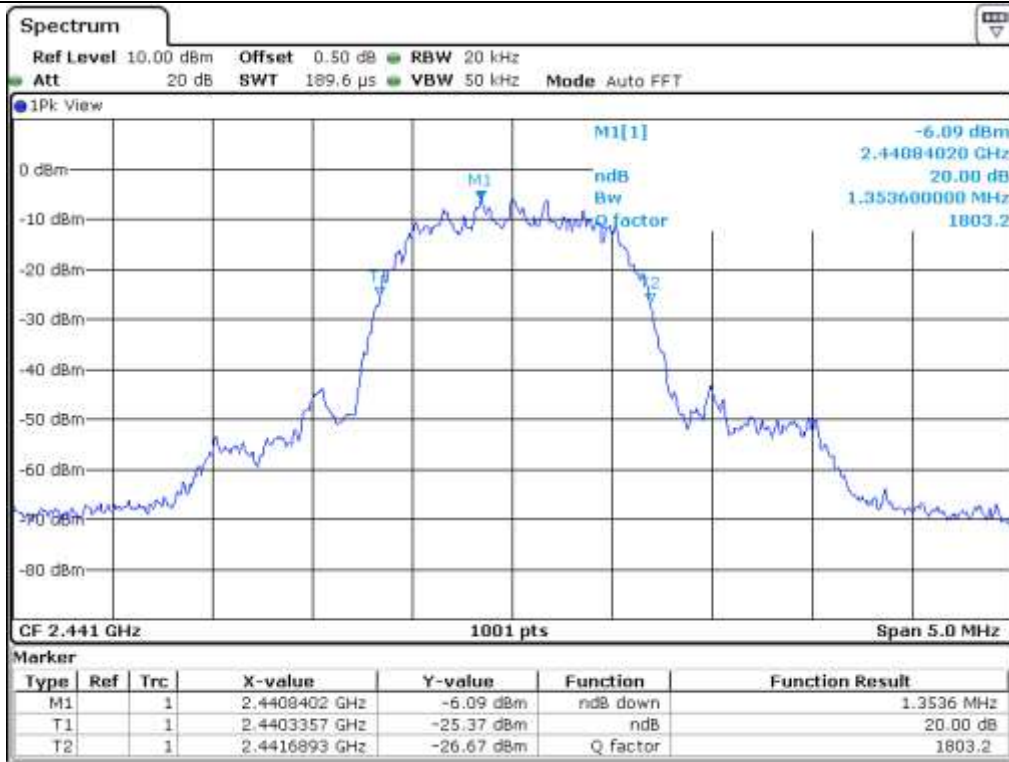


Middle Channel

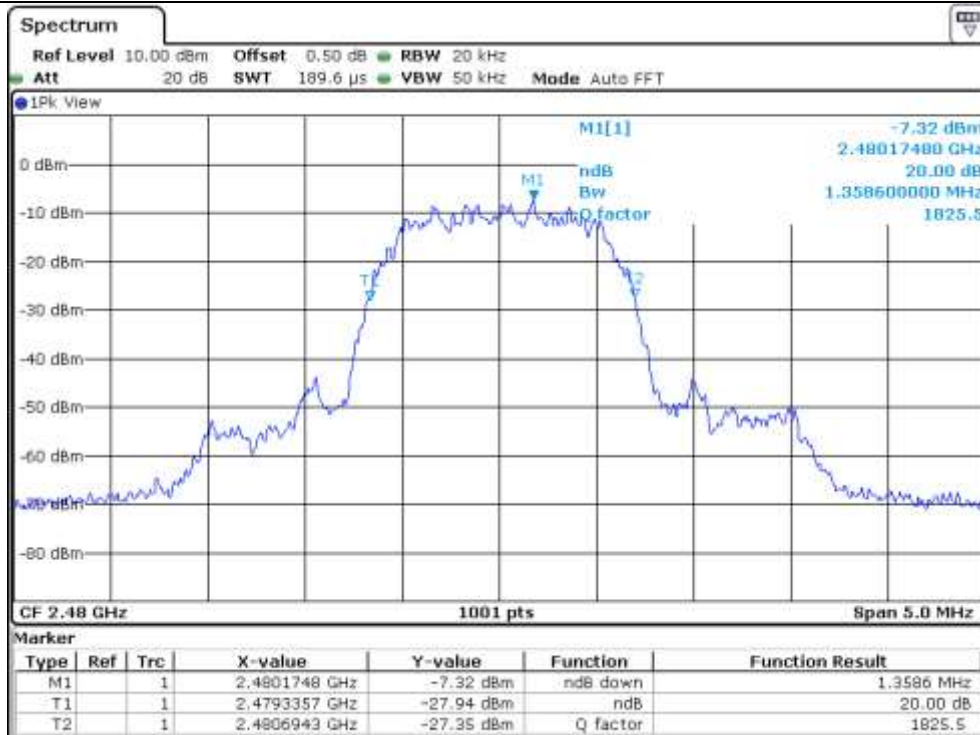


High Channel

7.6 Test data for 3 Mbps


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 343.70
Middle	2 441.00	1 373.60
High	2 480.00	1 343.70

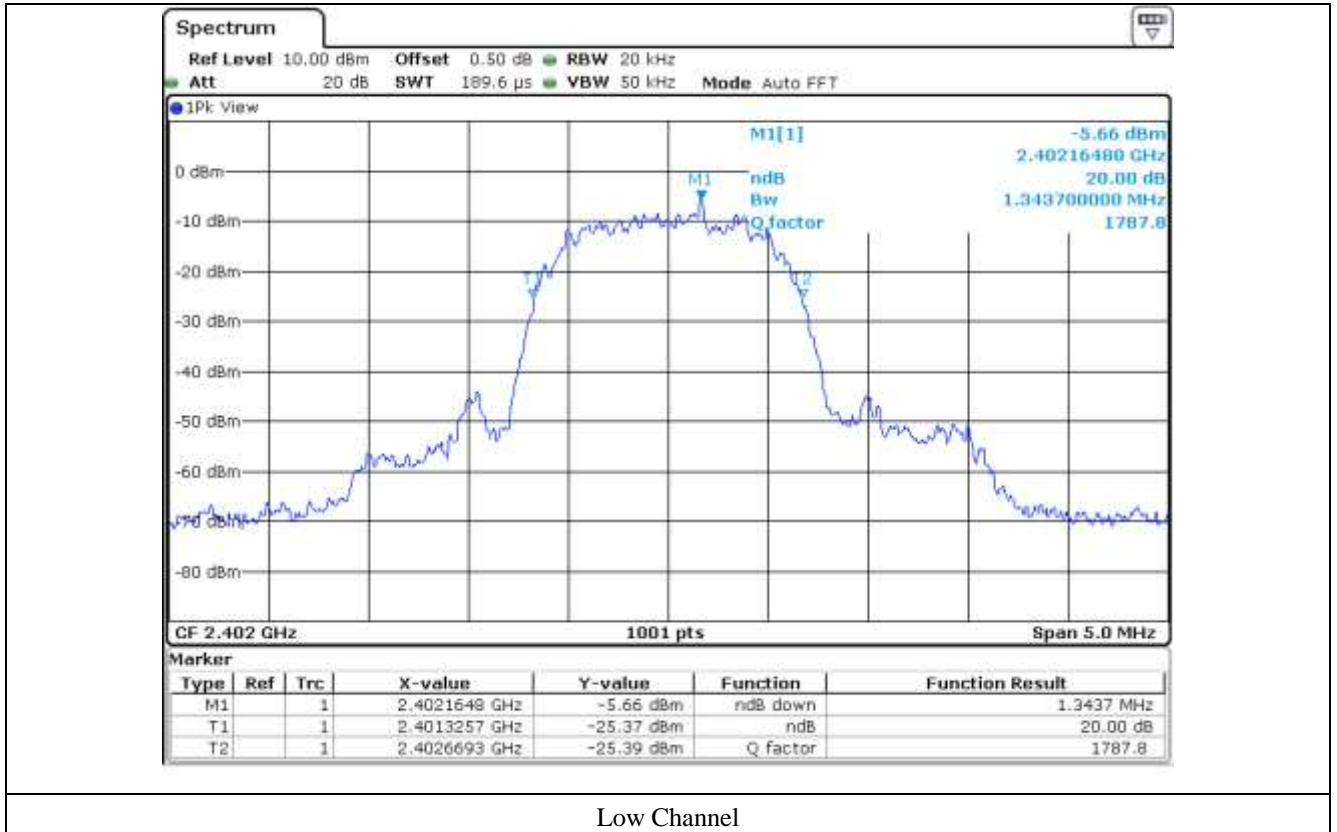

Low Channel

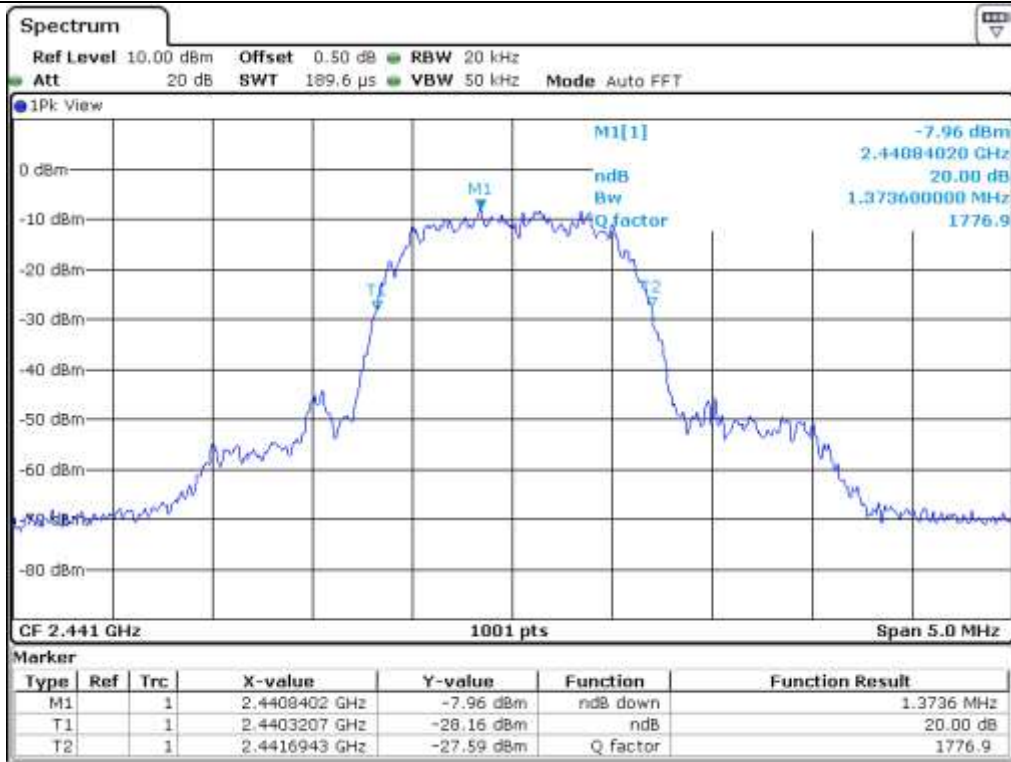

Middle Channel

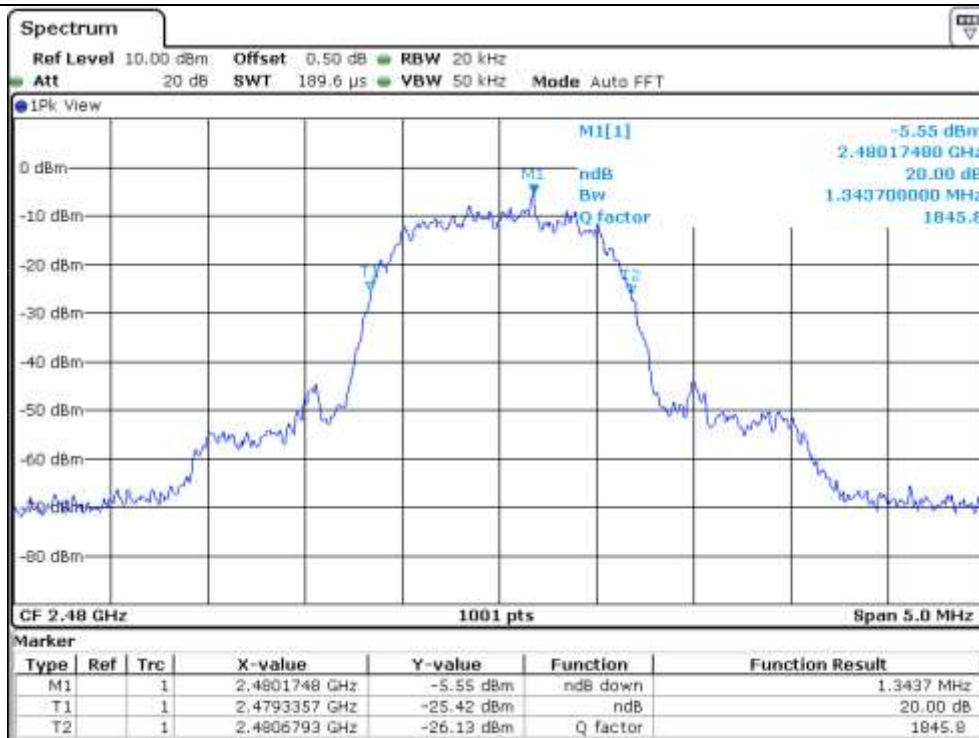

High Channel


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 5 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

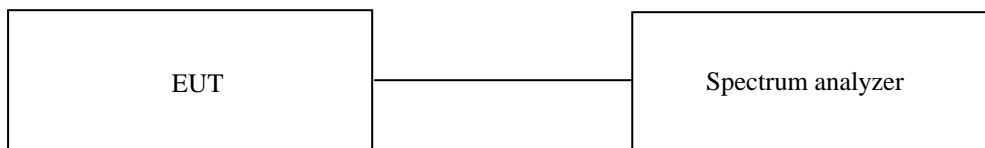


8.3 Test Date

September 07, 2020 ~ September 11, 2020

8.4 Test data for 1 Mbps

-. Test Result : Pass


MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	509.47	Separated by a minimum of 509.47 kHz

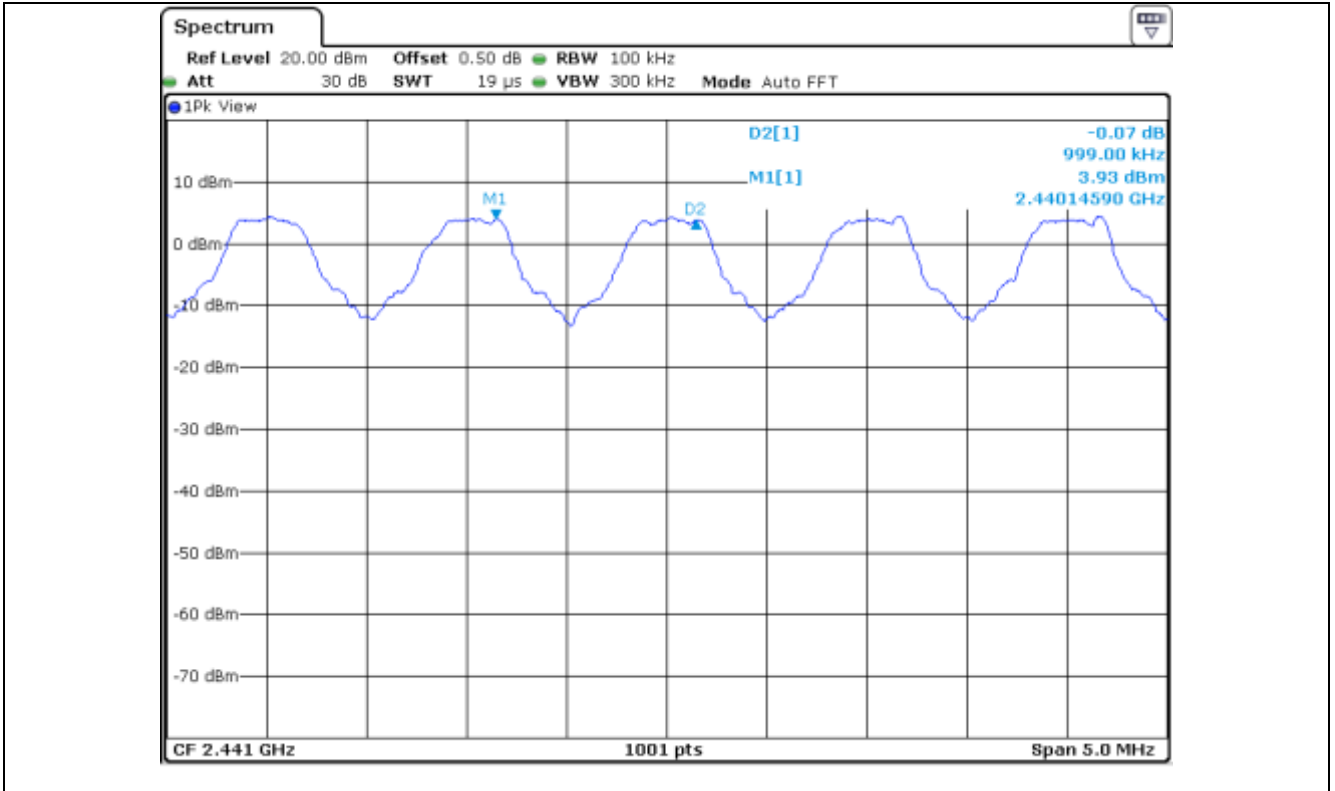

8.5 Test data for 2 Mbps

-. Test Result : Pass


MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	902.40	Separated by a minimum of 902.4 kHz

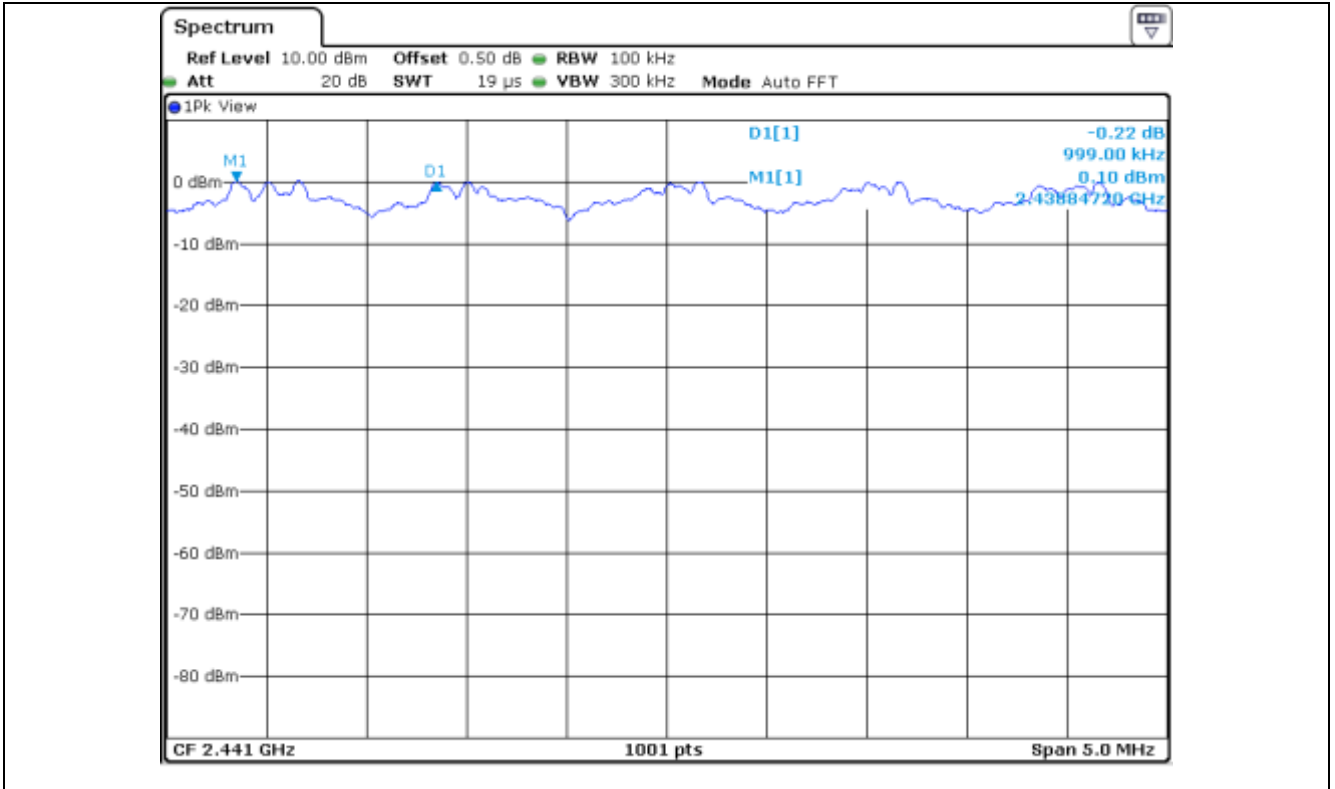

8.6 Test data for 3 Mbps

-. Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	915.73	Separated by a minimum of 915.73 kHz

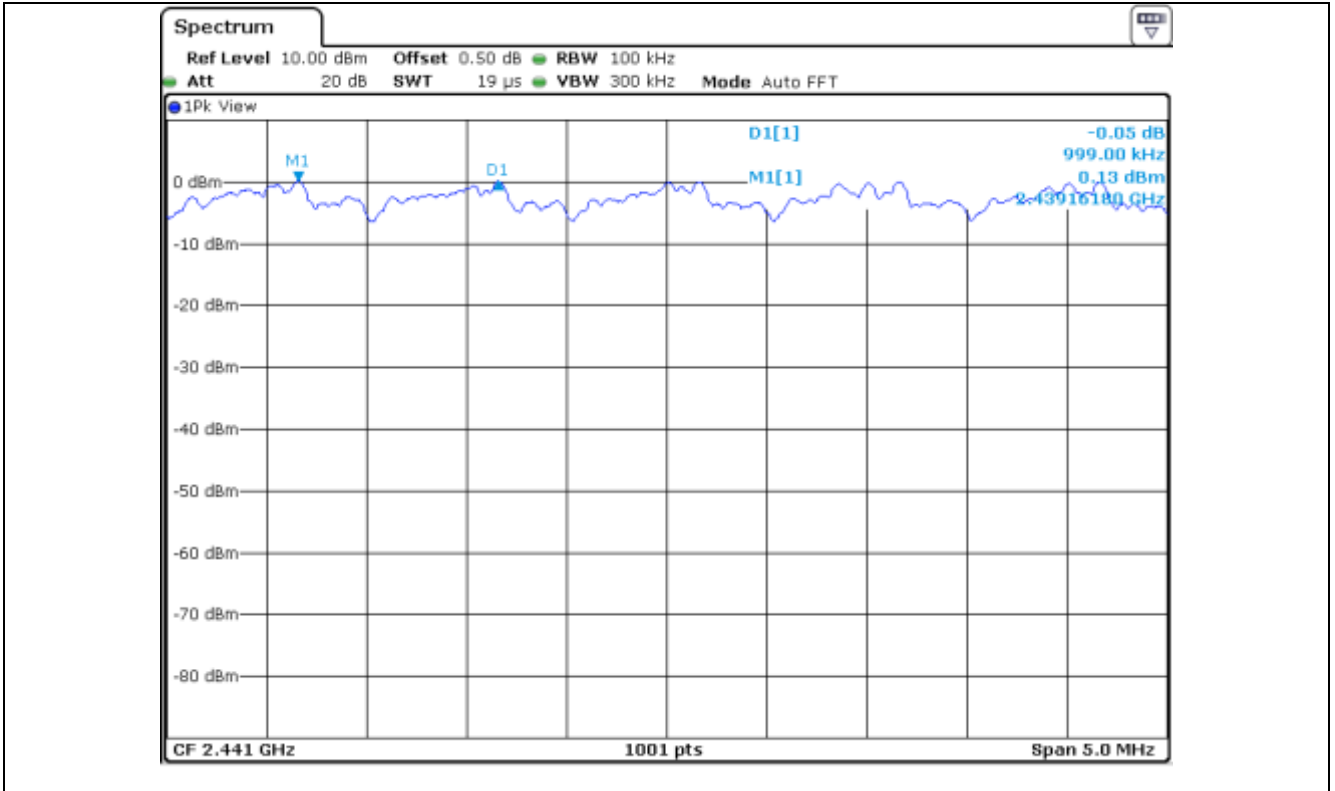


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 kHz and the resolution bandwidth is set to 300 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

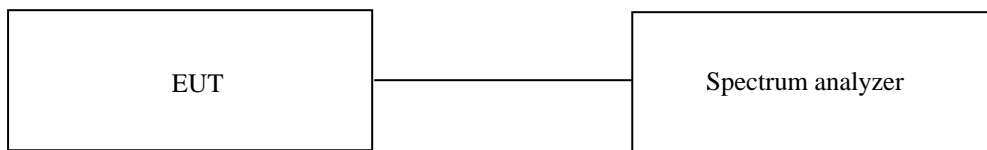


9.3 Test Date

September 07, 2020 ~ September 11, 2020


9.4 Test data for 1 Mbps

-. Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64

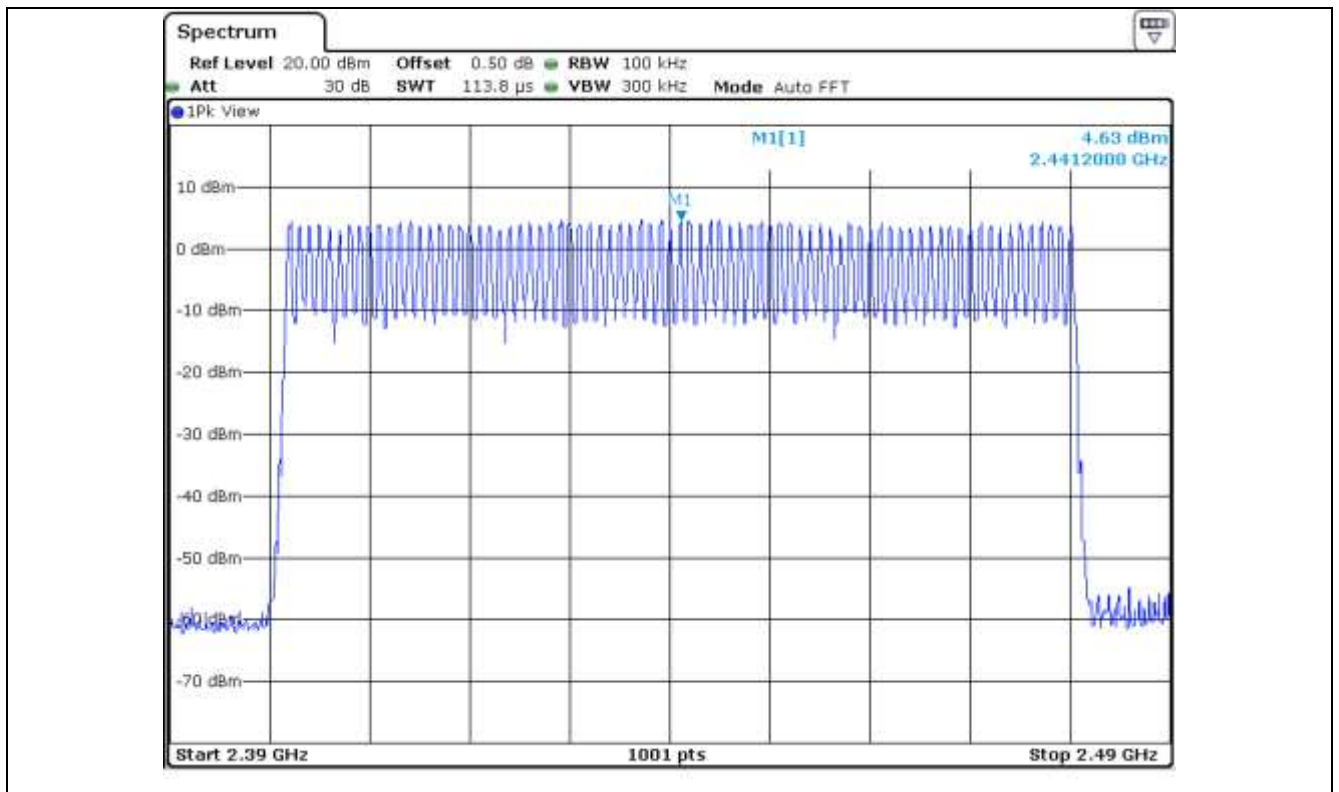


Total number of hopping channel: $28+30+21 = 79$

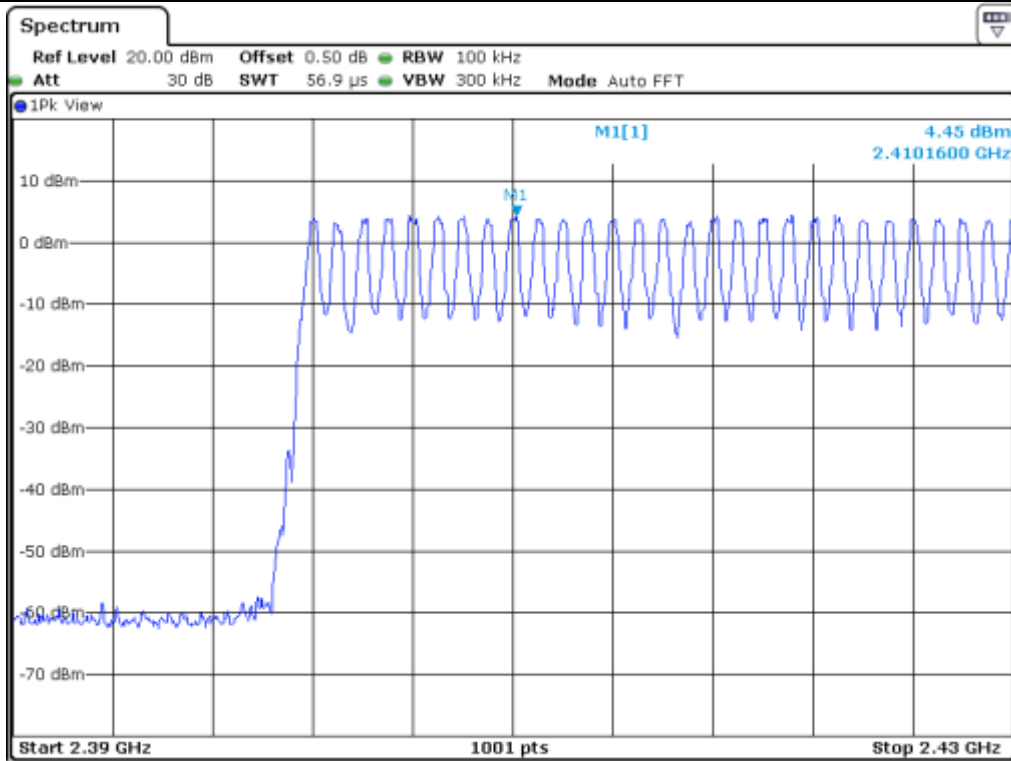

Number of hopping channel: 28

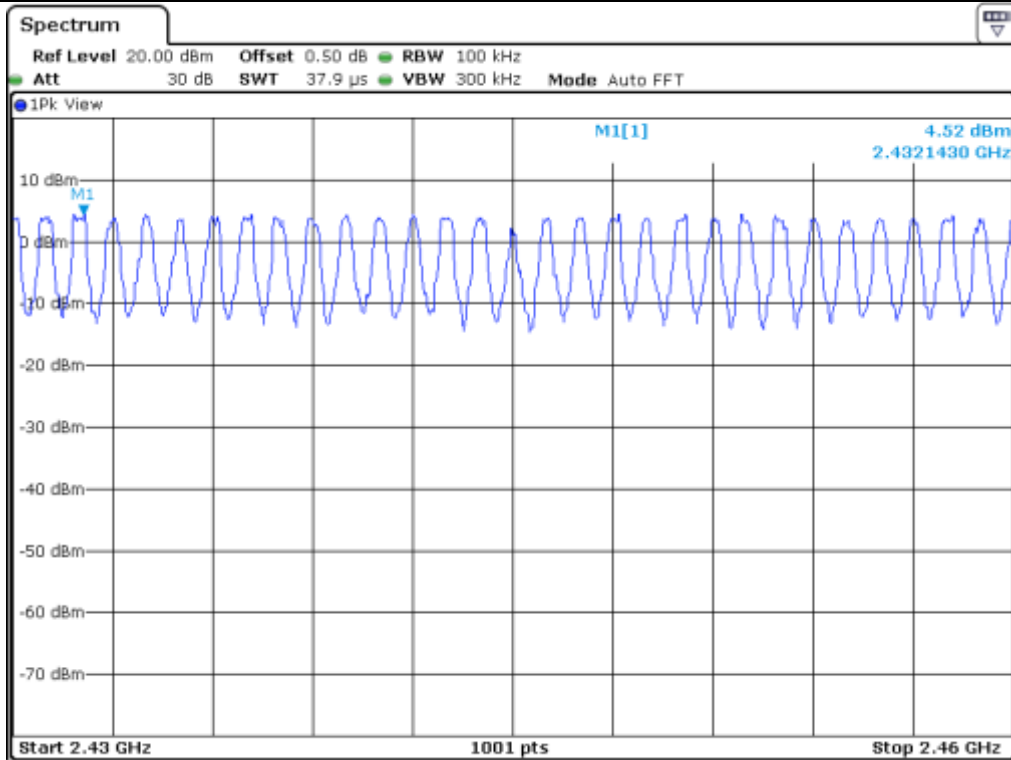

Number of hopping channel: 30

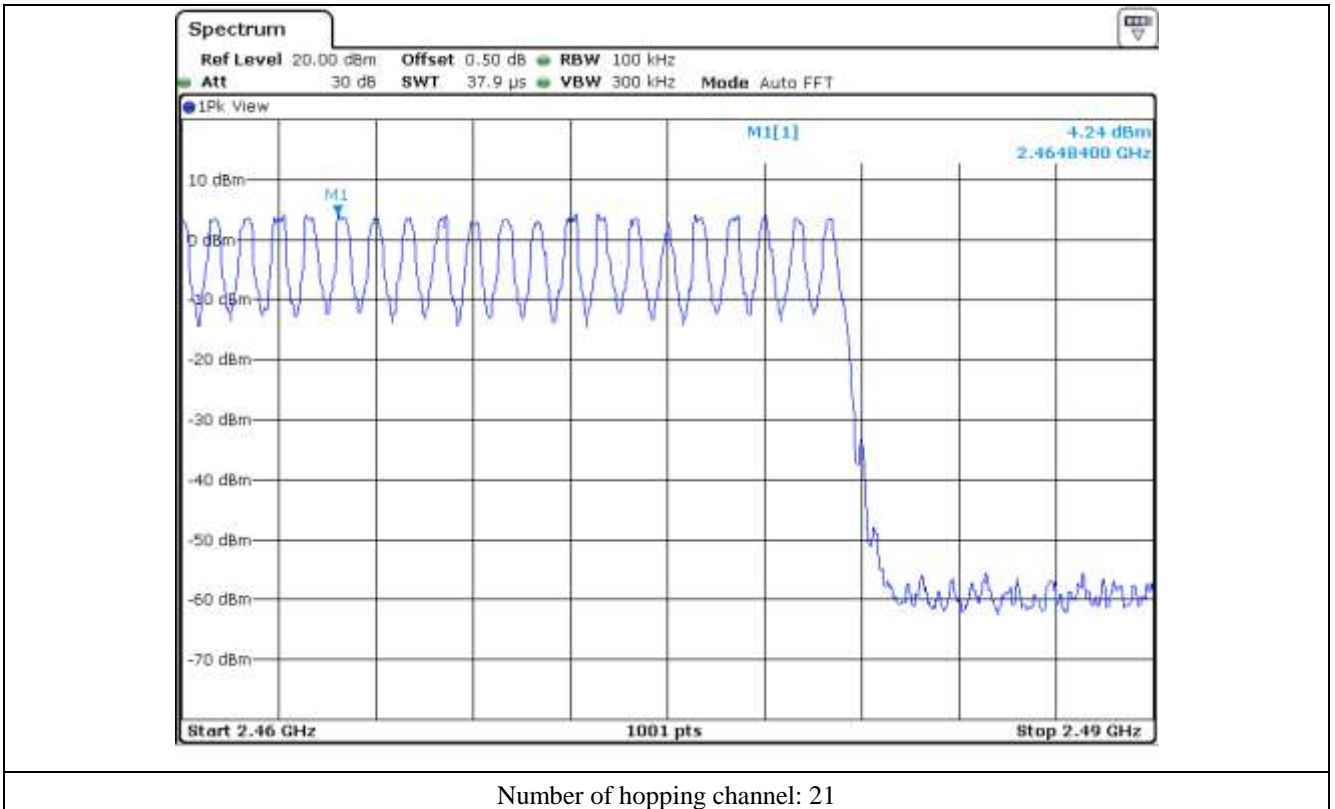


Number of hopping channel: 21


9.5 Test data for 2 Mbps

-. Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

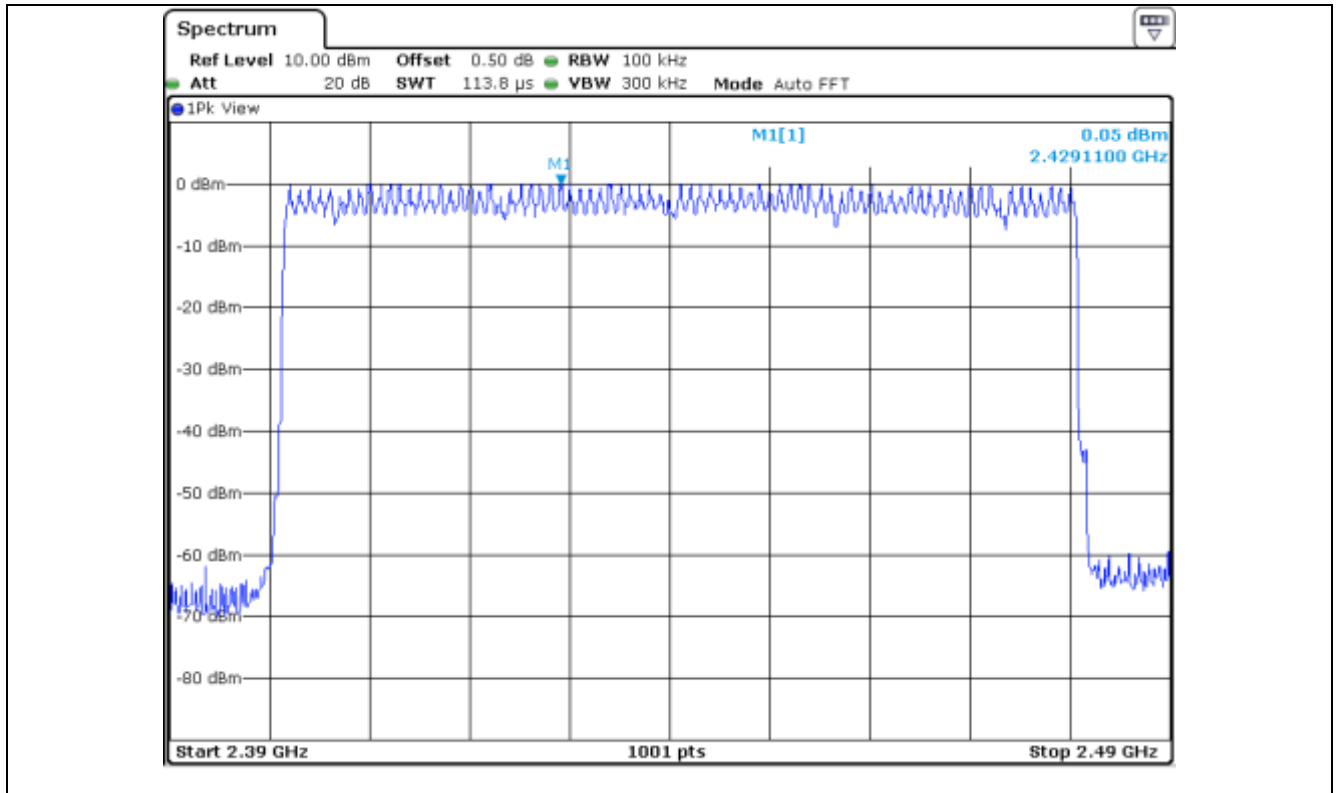


Total number of hopping channel: $28+30+21 = 79$

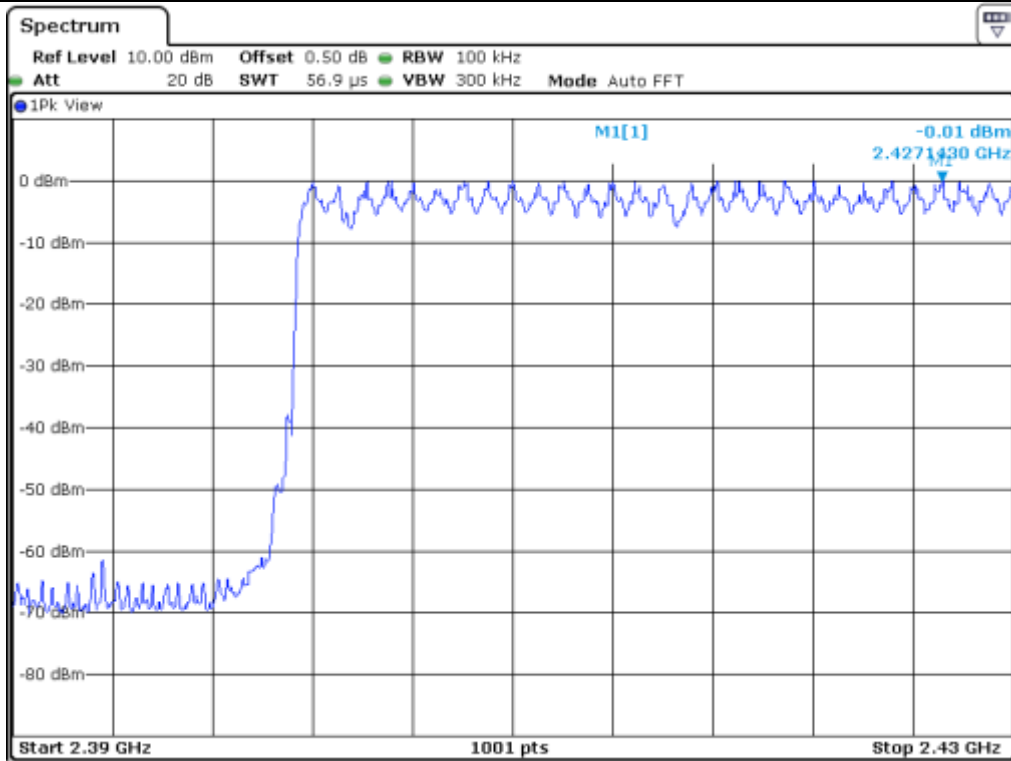

Number of hopping channel: 28

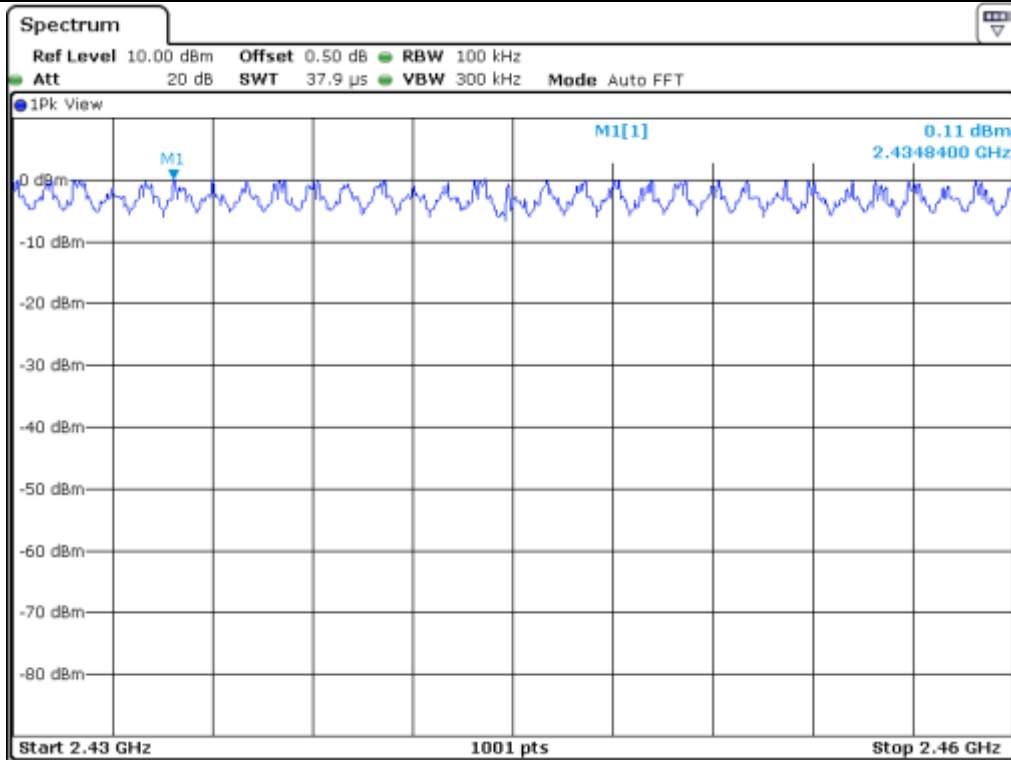


Number of hopping channel: 30

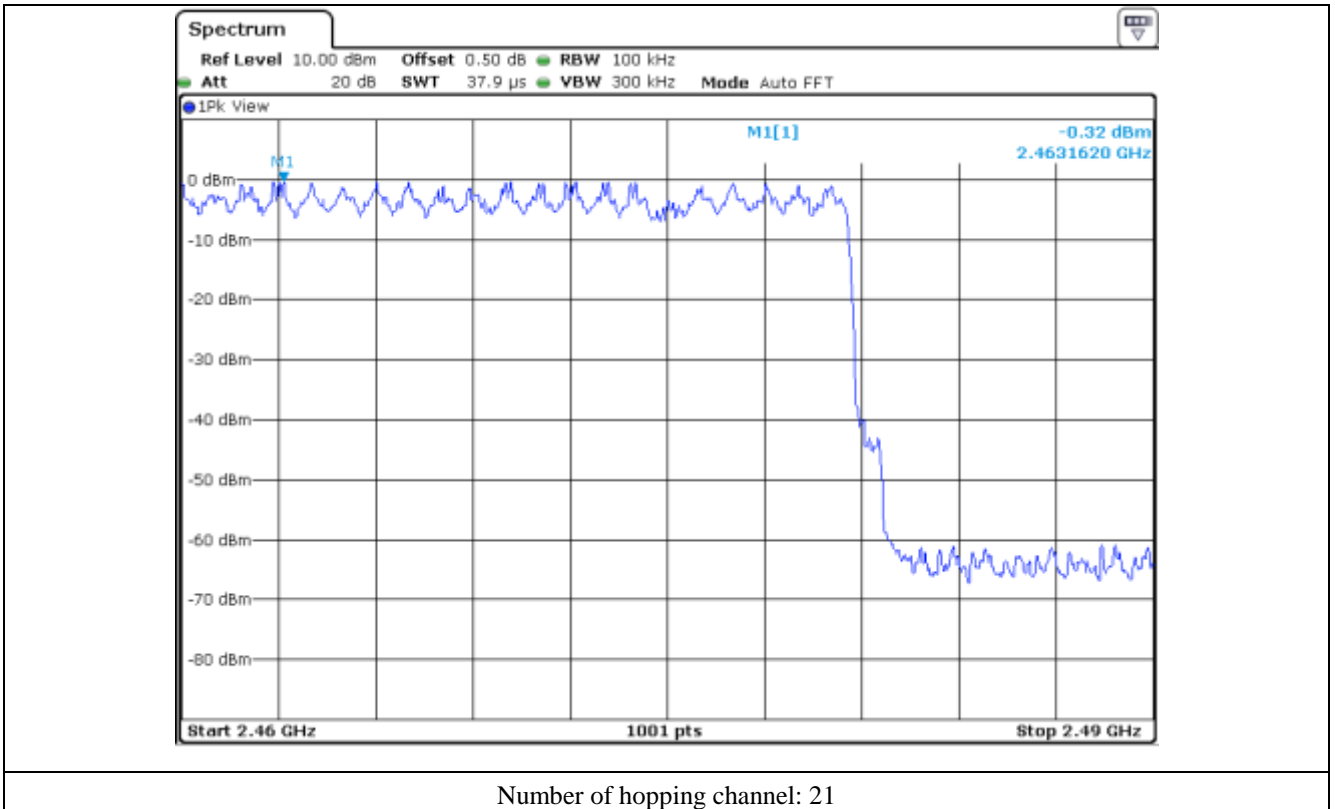


9.6 Test data for 3 Mbps

-. Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64

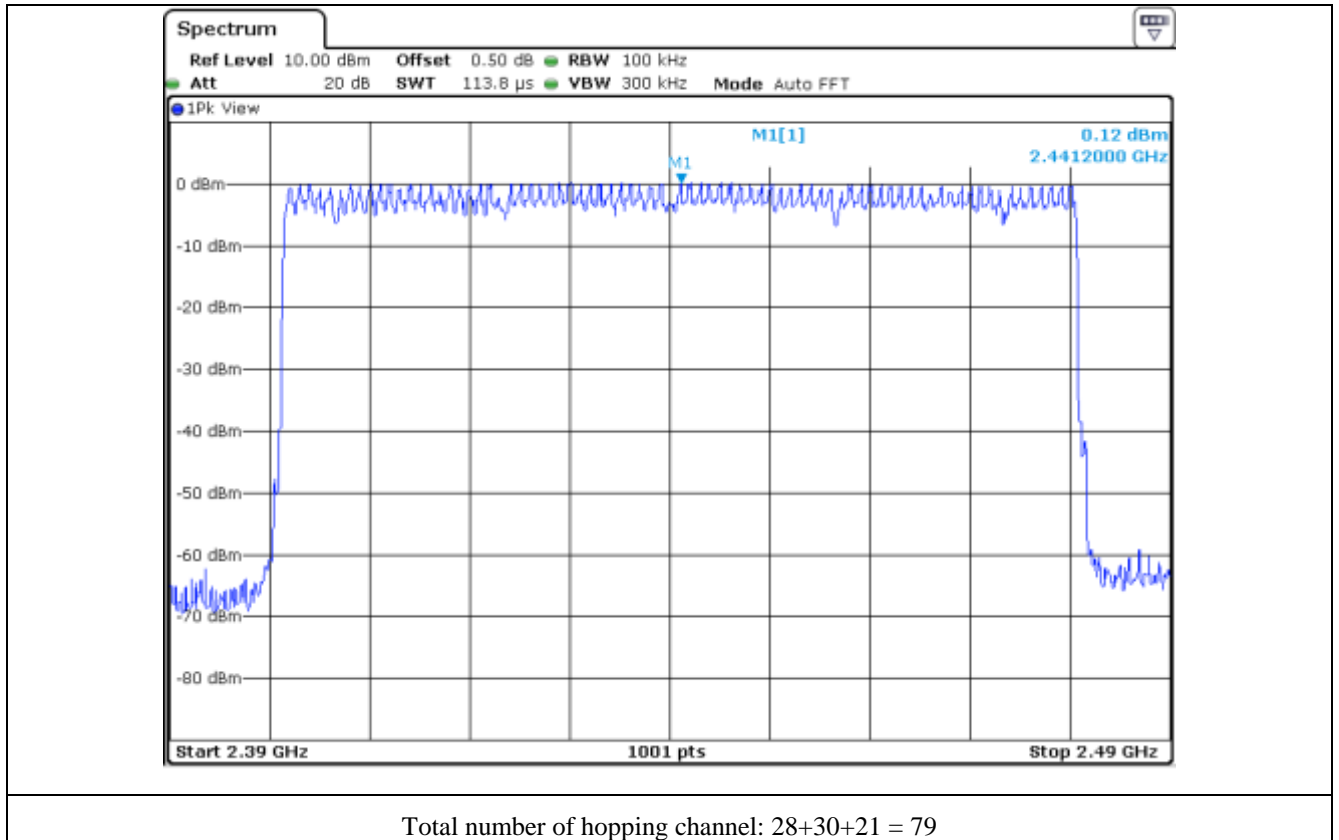


Total number of hopping channel: 28+30+21 = 79

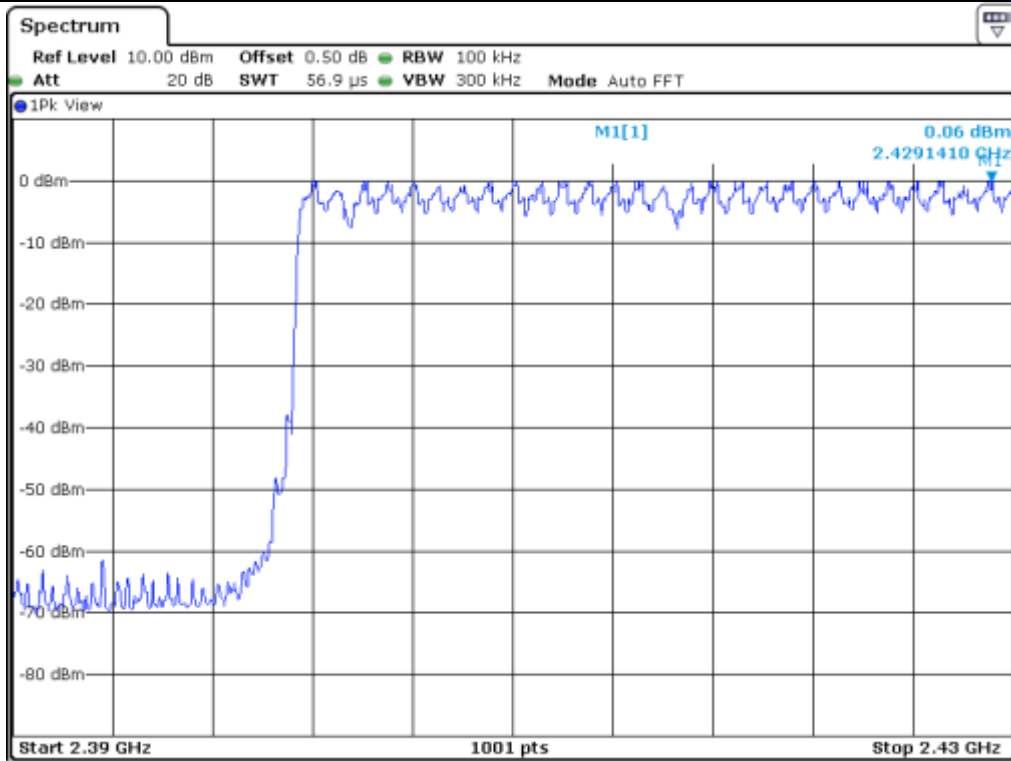

Number of hopping channel: 28

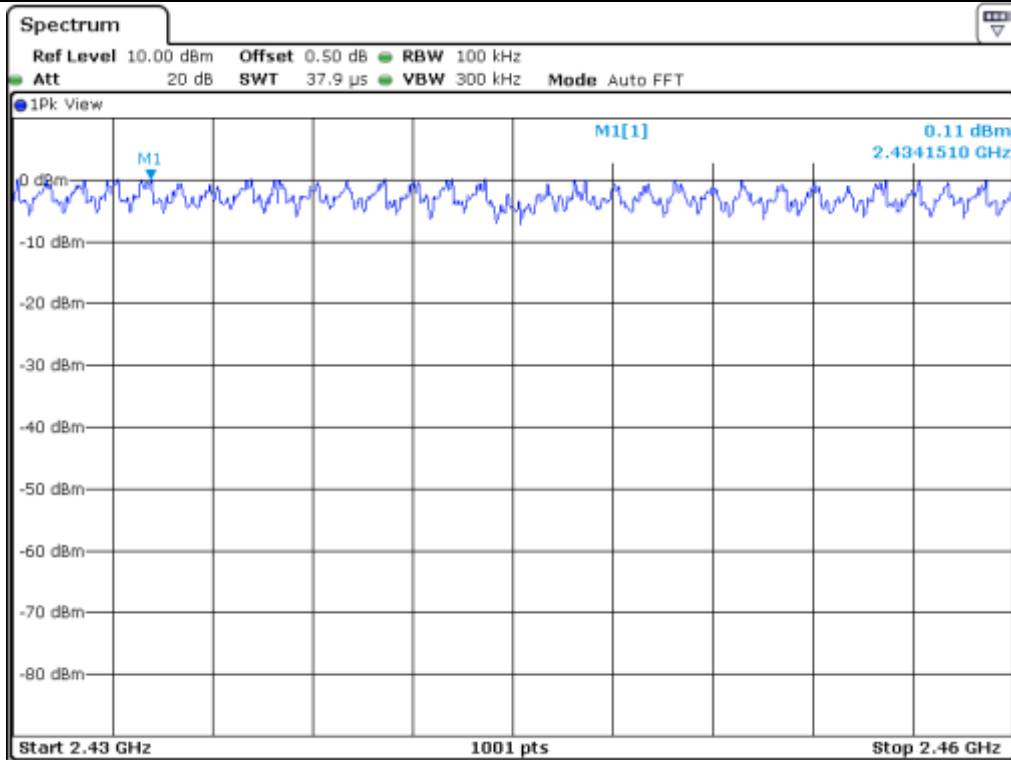

Number of hopping channel: 30

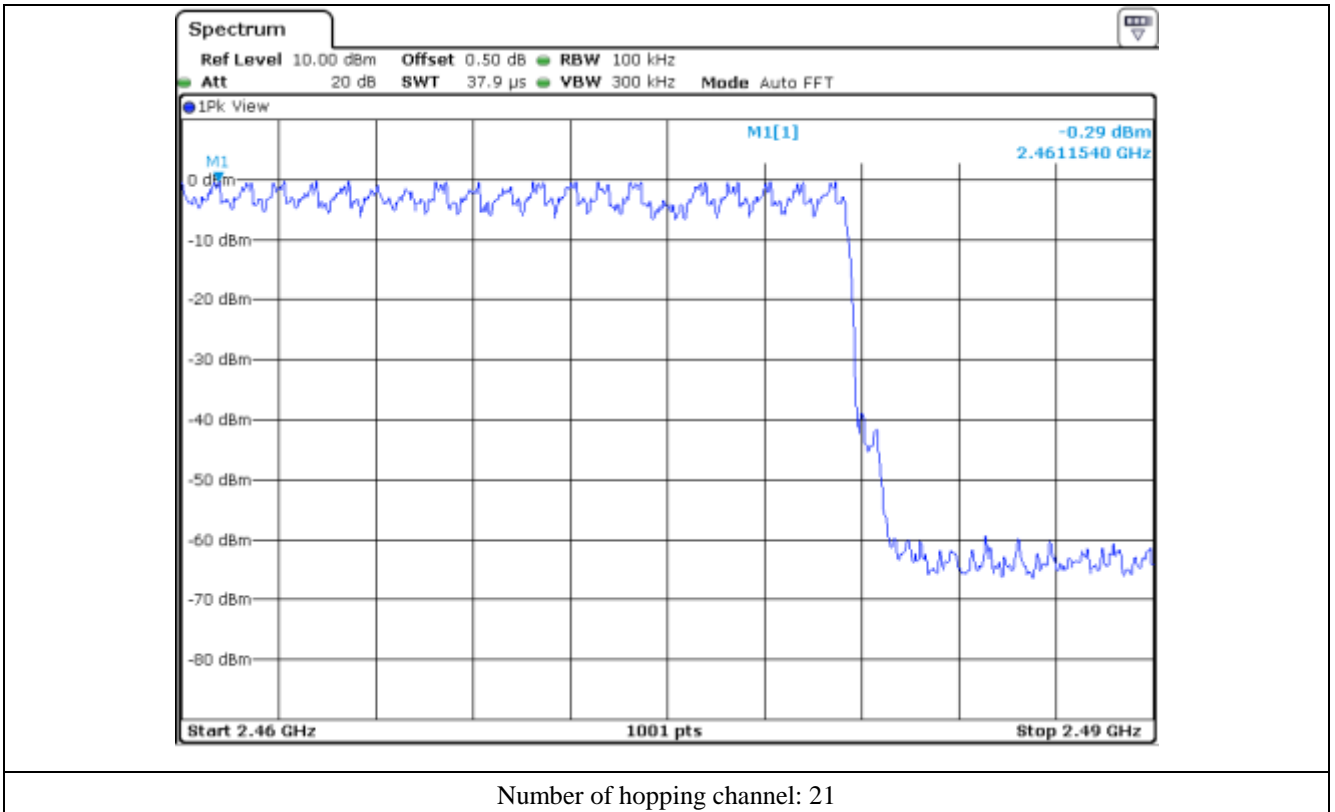


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

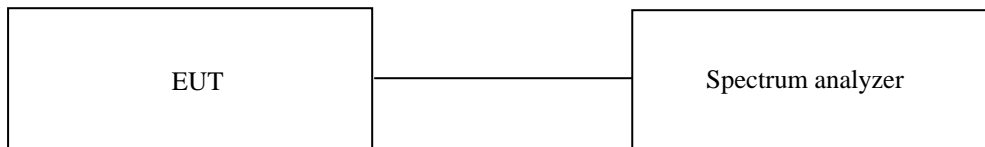

10.3 Test Date

September 07, 2020 ~ September 11, 2020

10.4 Test data for 1 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.380	10.13	31.60	121.64	400.00	PASS
DH3	1.640	5.06	31.60	262.23	400.00	
DH5	2.900	3.38	31.60	309.74	400.00	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.

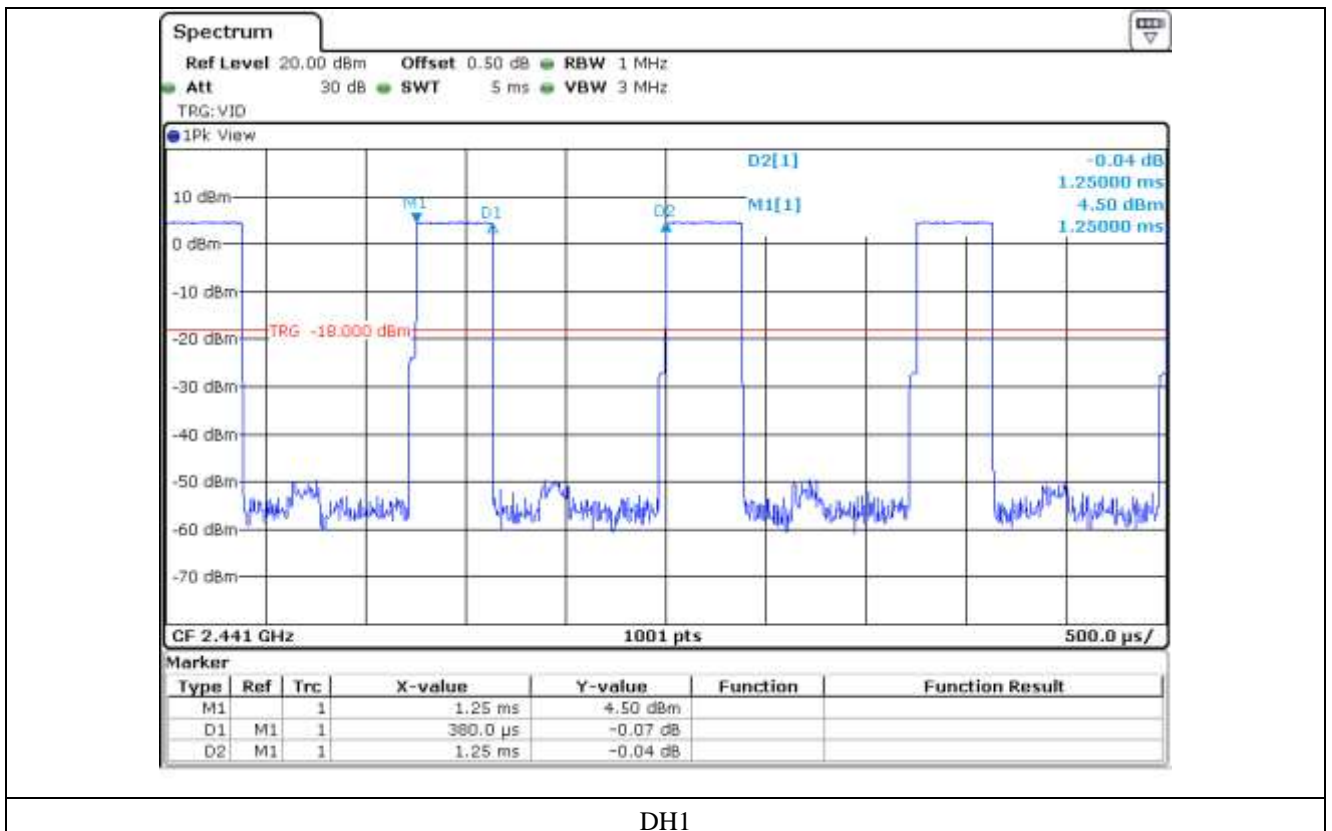

DH1

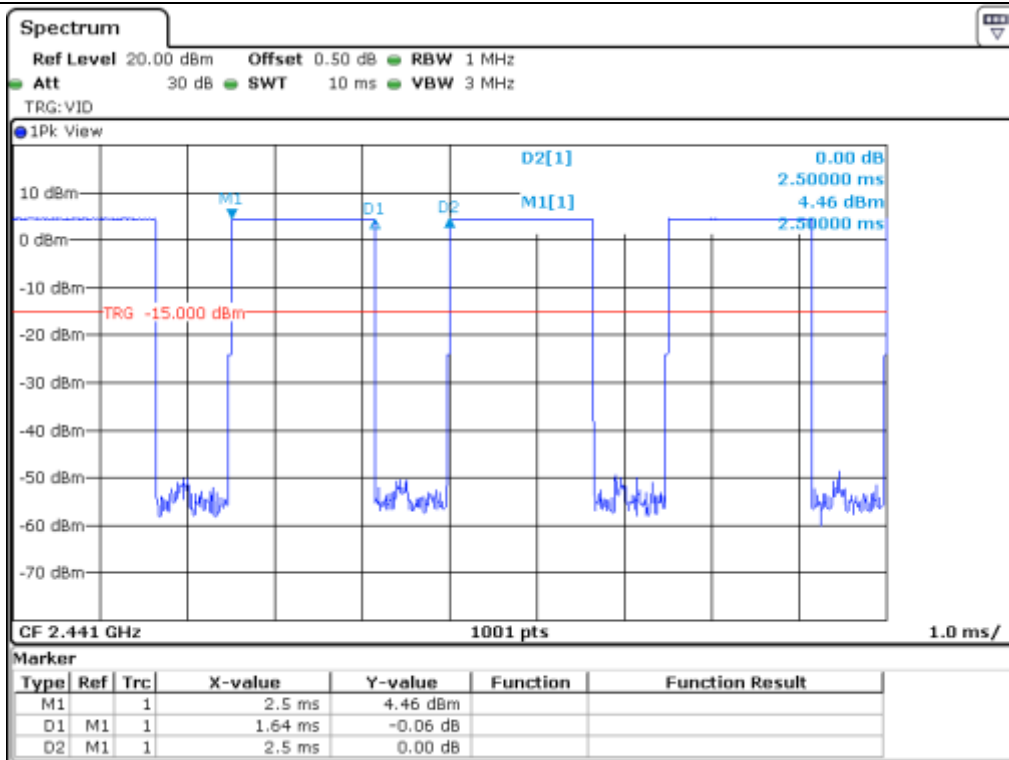

DH3

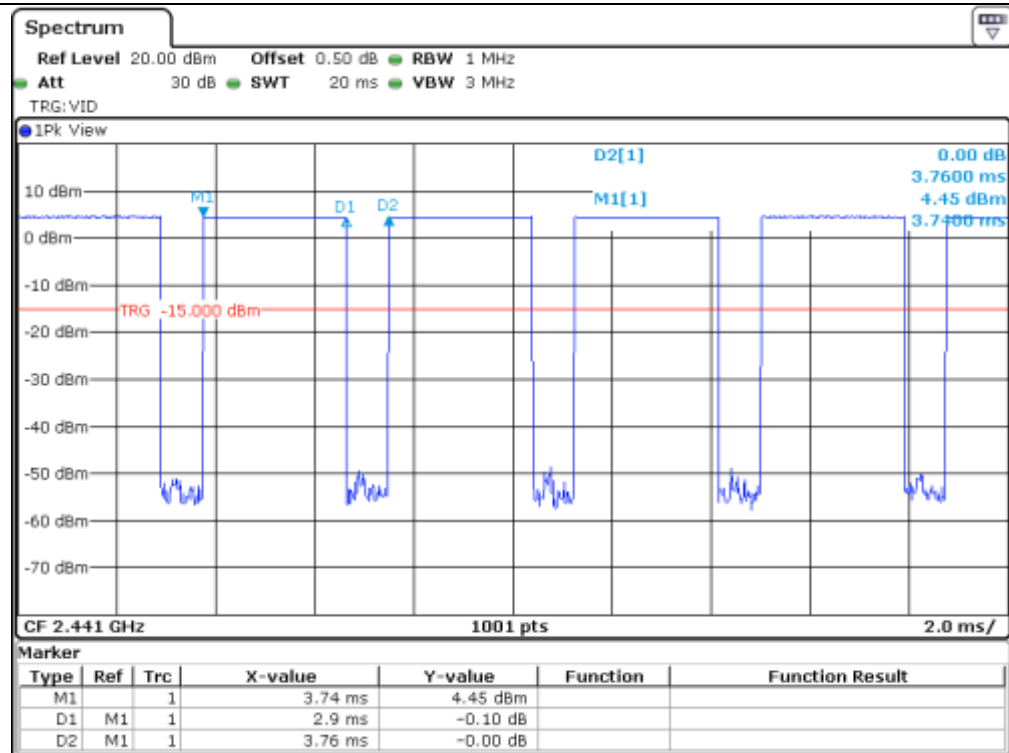

DH5

10.5 Test data for 2 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.385	10.13	31.60	123.24	400.00	PASS
DH3	1.640	5.06	31.60	262.23	400.00	
DH5	2.900	3.38	31.60	309.74	400.00	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.

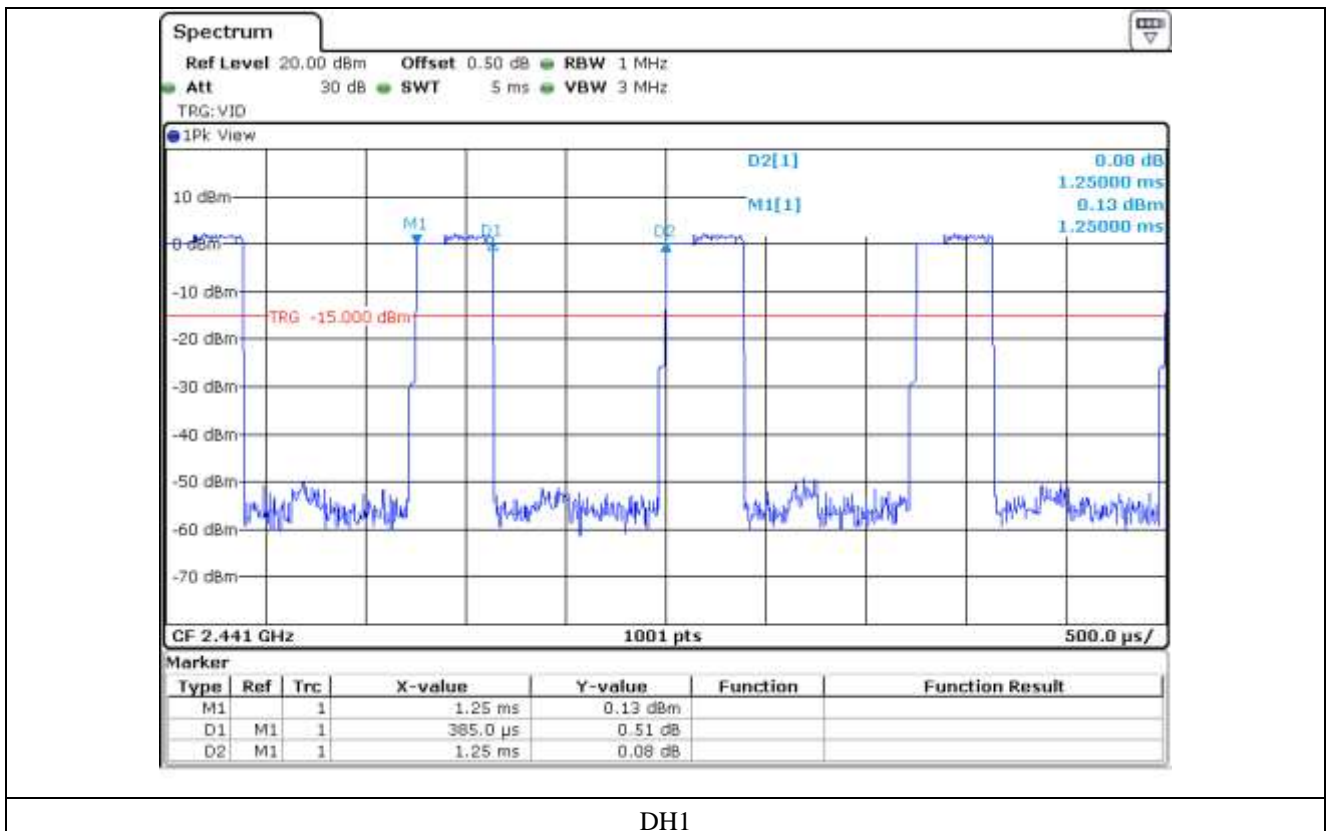

DH1

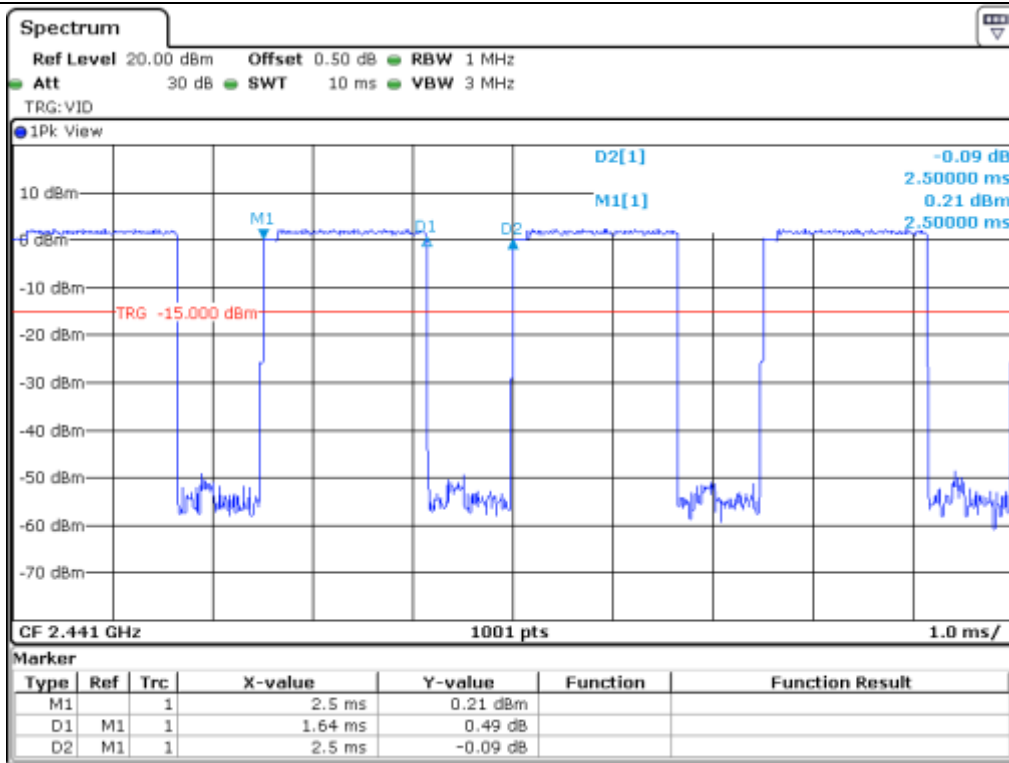

DH3

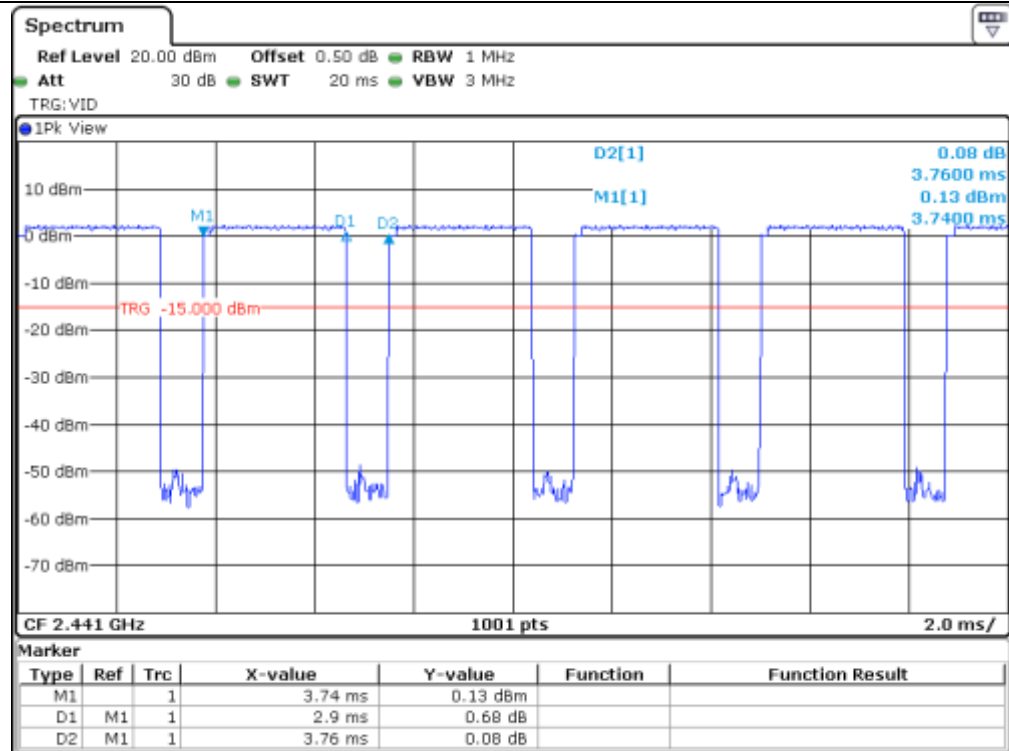

DH5

10.6 Test data for 3 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.390	10.13	31.60	124.84	400.00	PASS
DH3	1.640	5.06	31.60	262.23	400.00	
DH5	2.900	3.38	31.60	309.74	400.00	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.

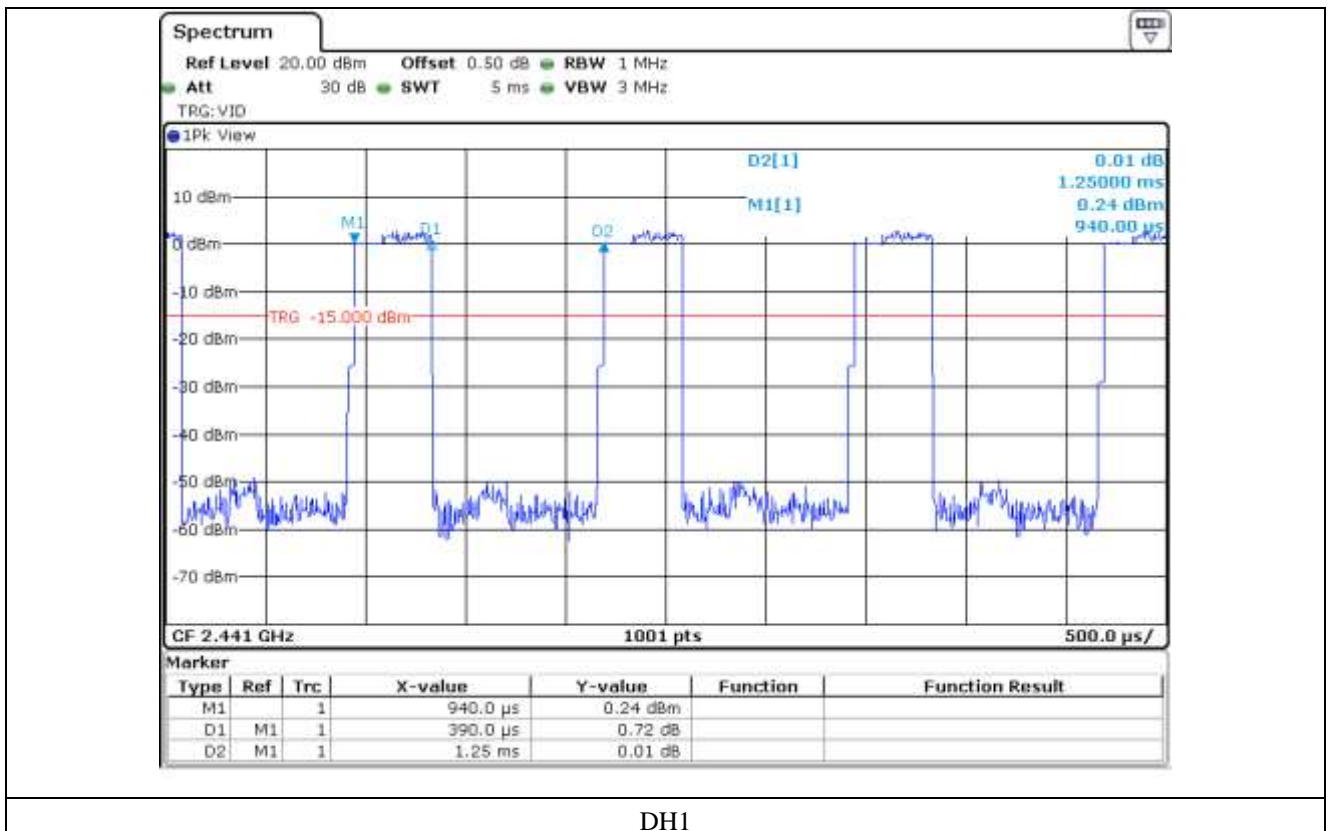

DH1

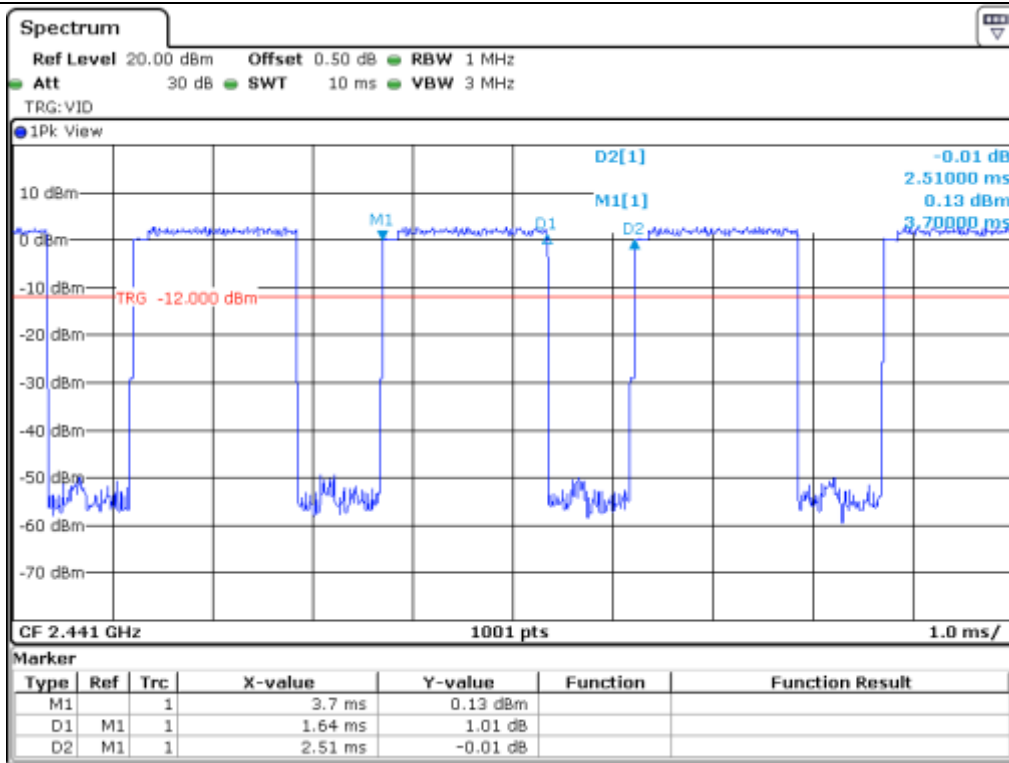

DH3

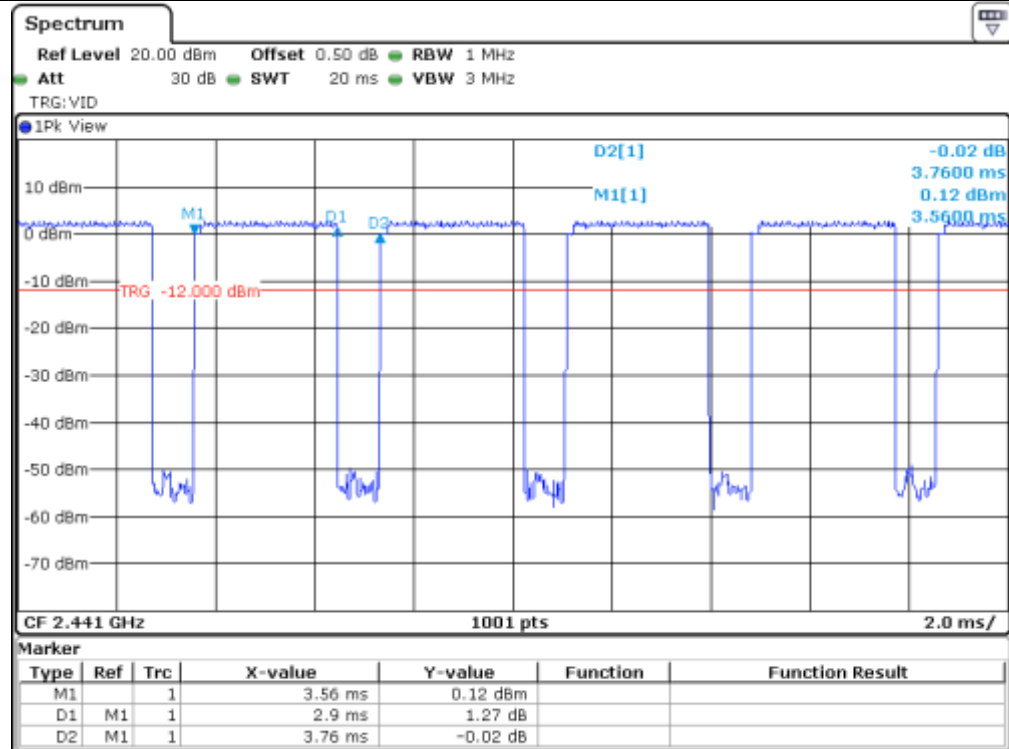

DH5

11. MAXIMUM PEAK OUTPUT POWER


11.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

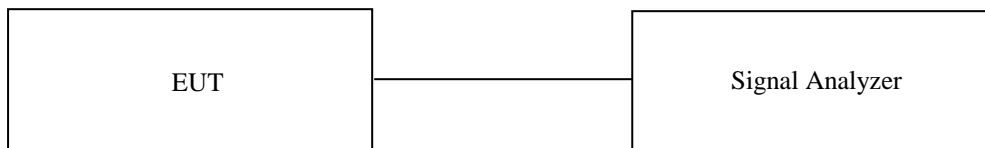

11.3 Test Date


September 07, 2020 ~ September 11, 2020

11.4 Test data for 1 Mbps


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	4.73	21.00	16.27
MIDDLE	2 441.00	4.85	21.00	16.15
HIGH	2 480.00	4.57	21.00	16.43


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

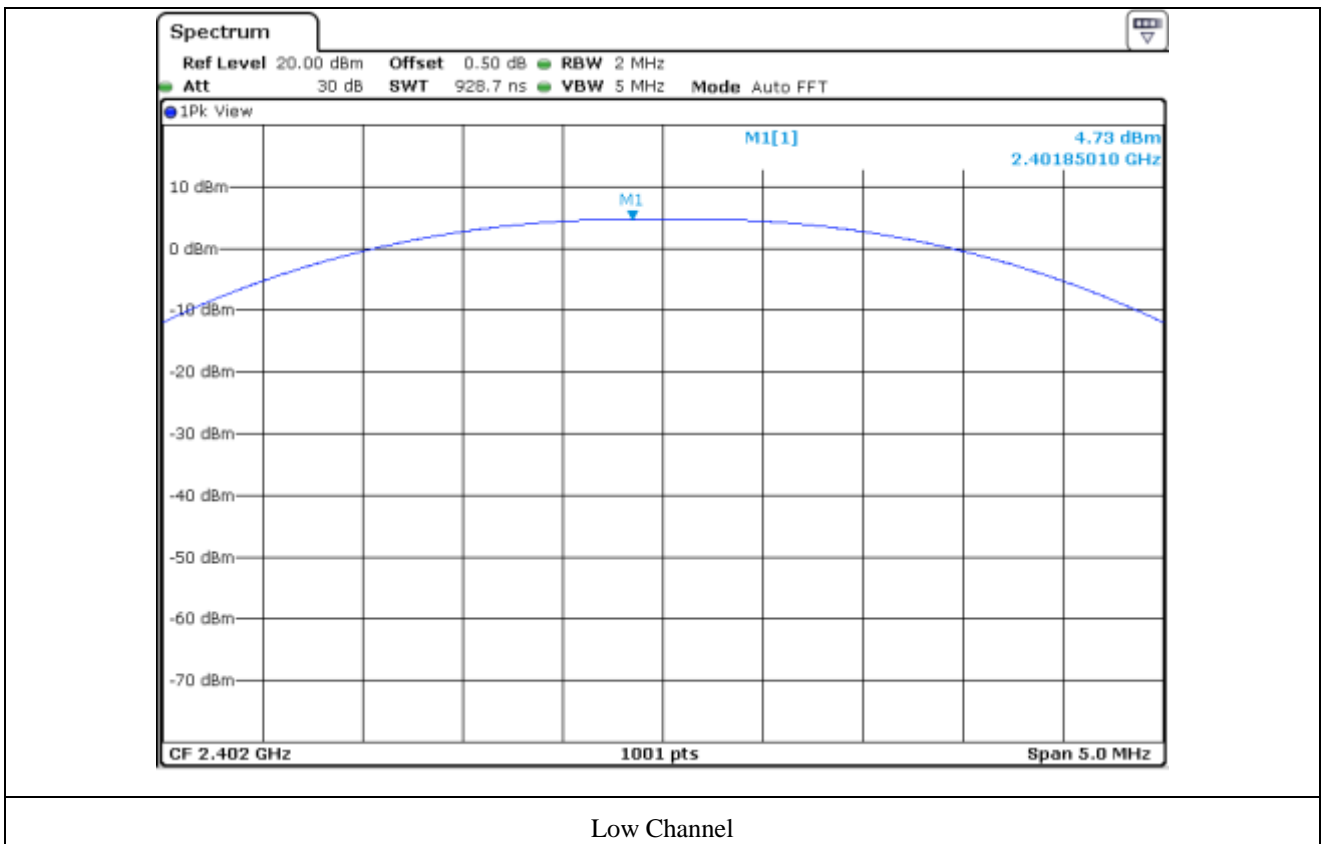

Low Channel

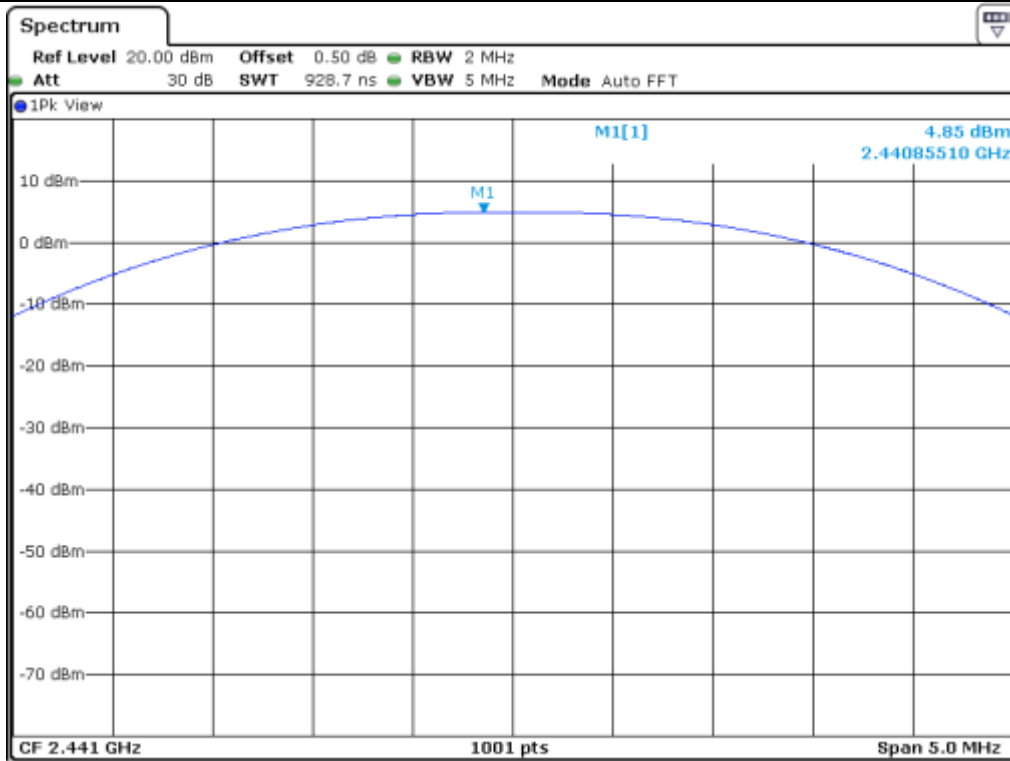

Middle Channel

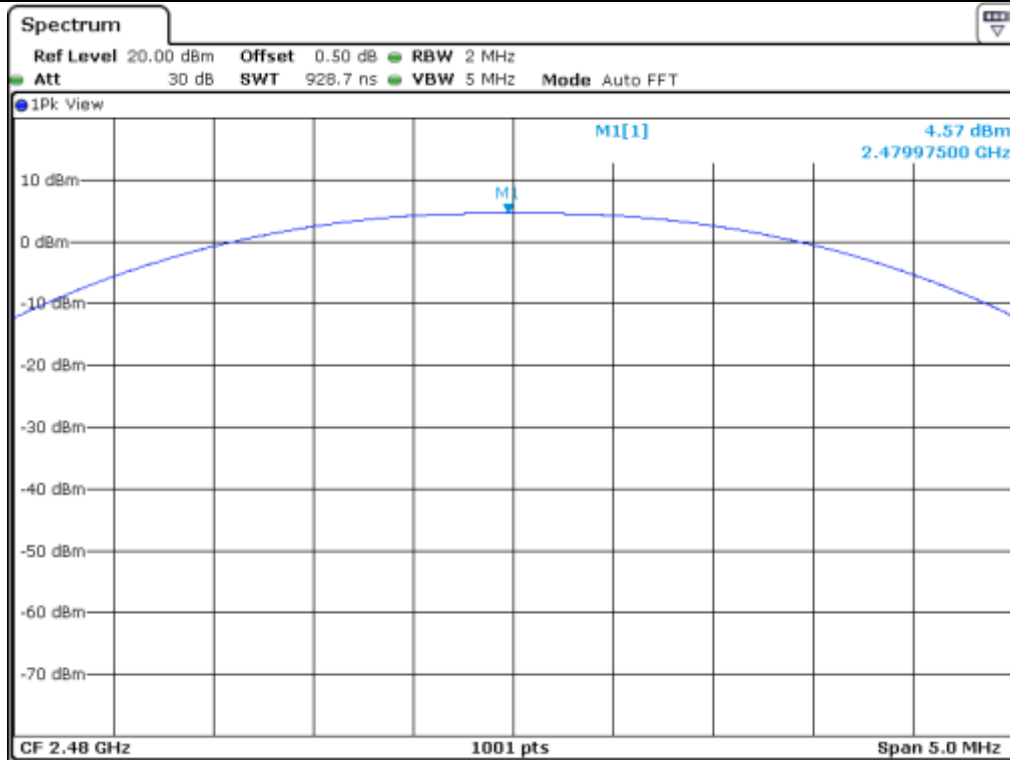


High Channel


11.5 Test data for 2 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	2.50	21.00	18.50
MIDDLE	2 441.00	2.67	21.00	18.33
HIGH	2 480.00	2.17	21.00	18.83

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

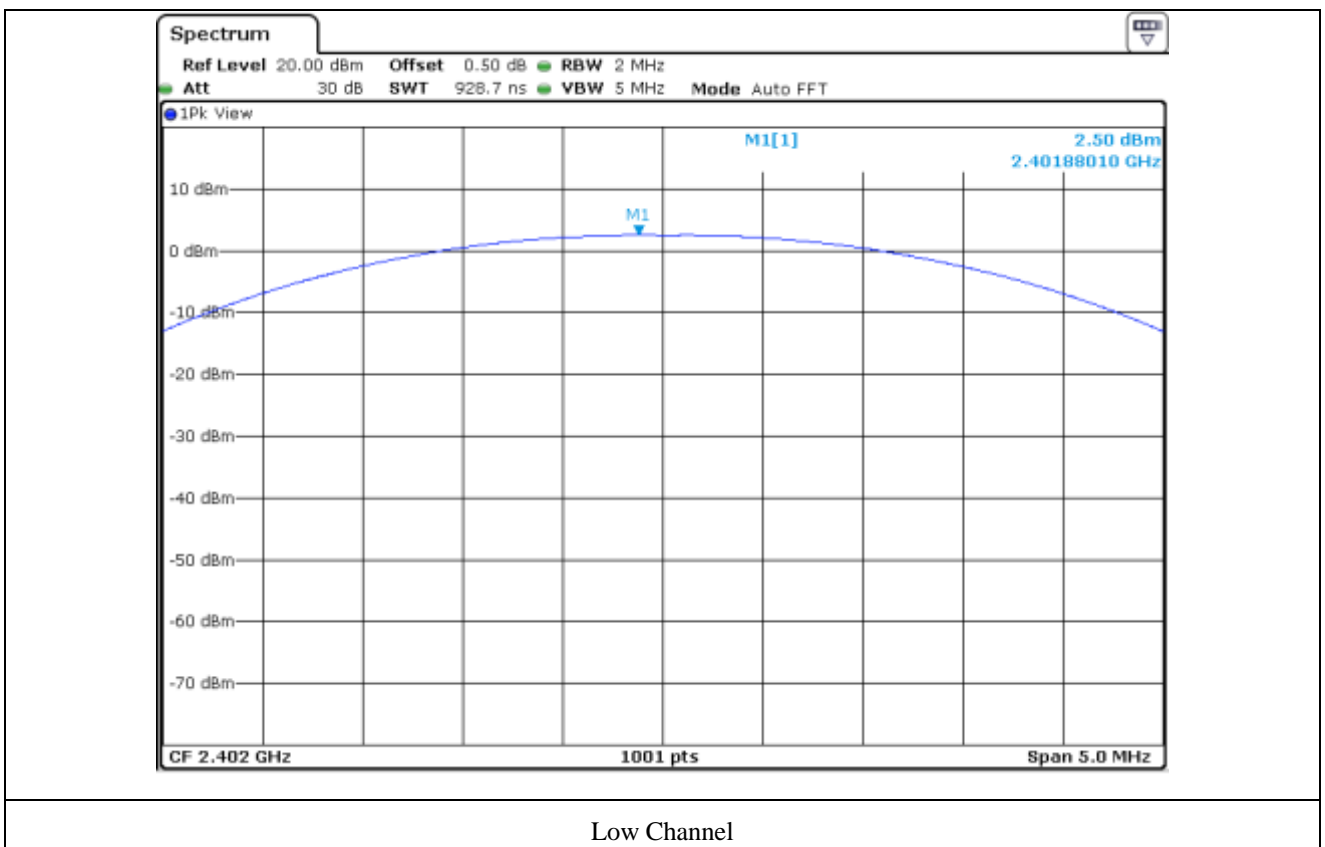

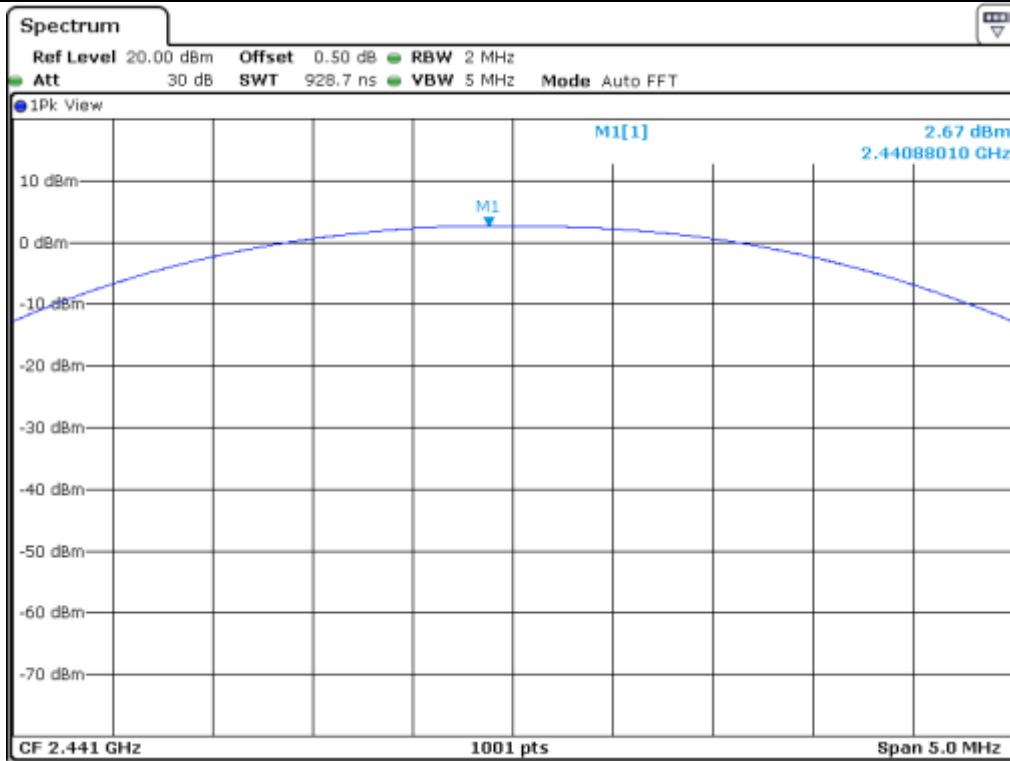

Middle Channel

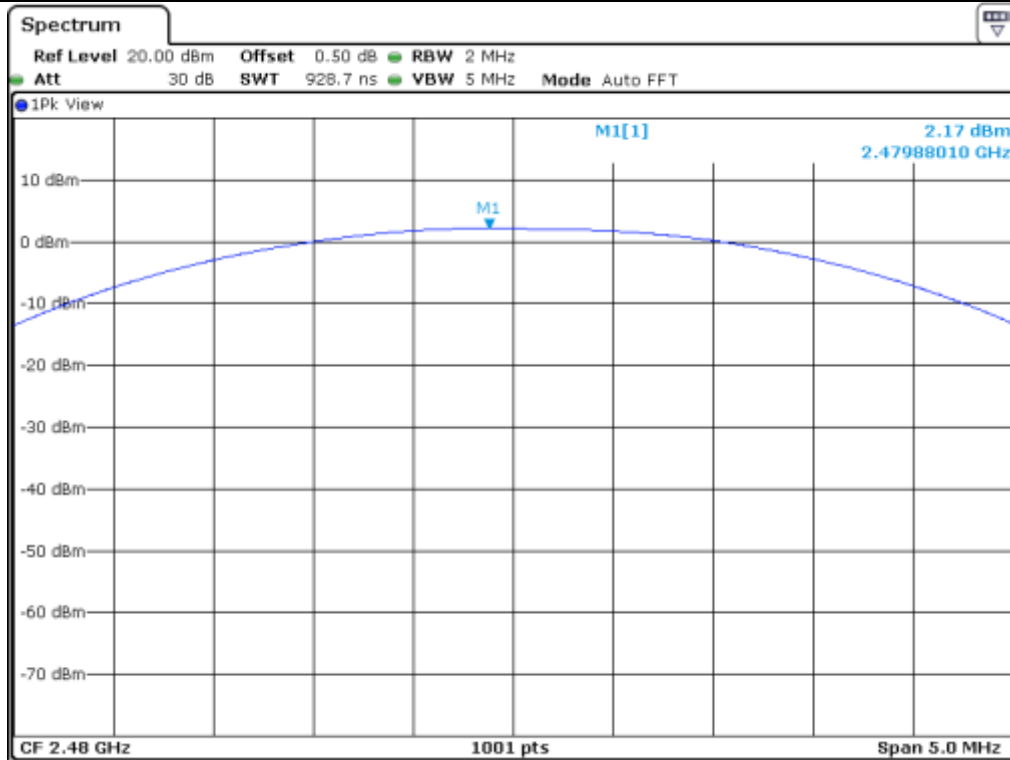


High Channel


11.6 Test data for 3 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	2.97	21.00	18.03
MIDDLE	2 441.00	3.07	21.00	17.93
HIGH	2 480.00	2.62	21.00	18.38

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

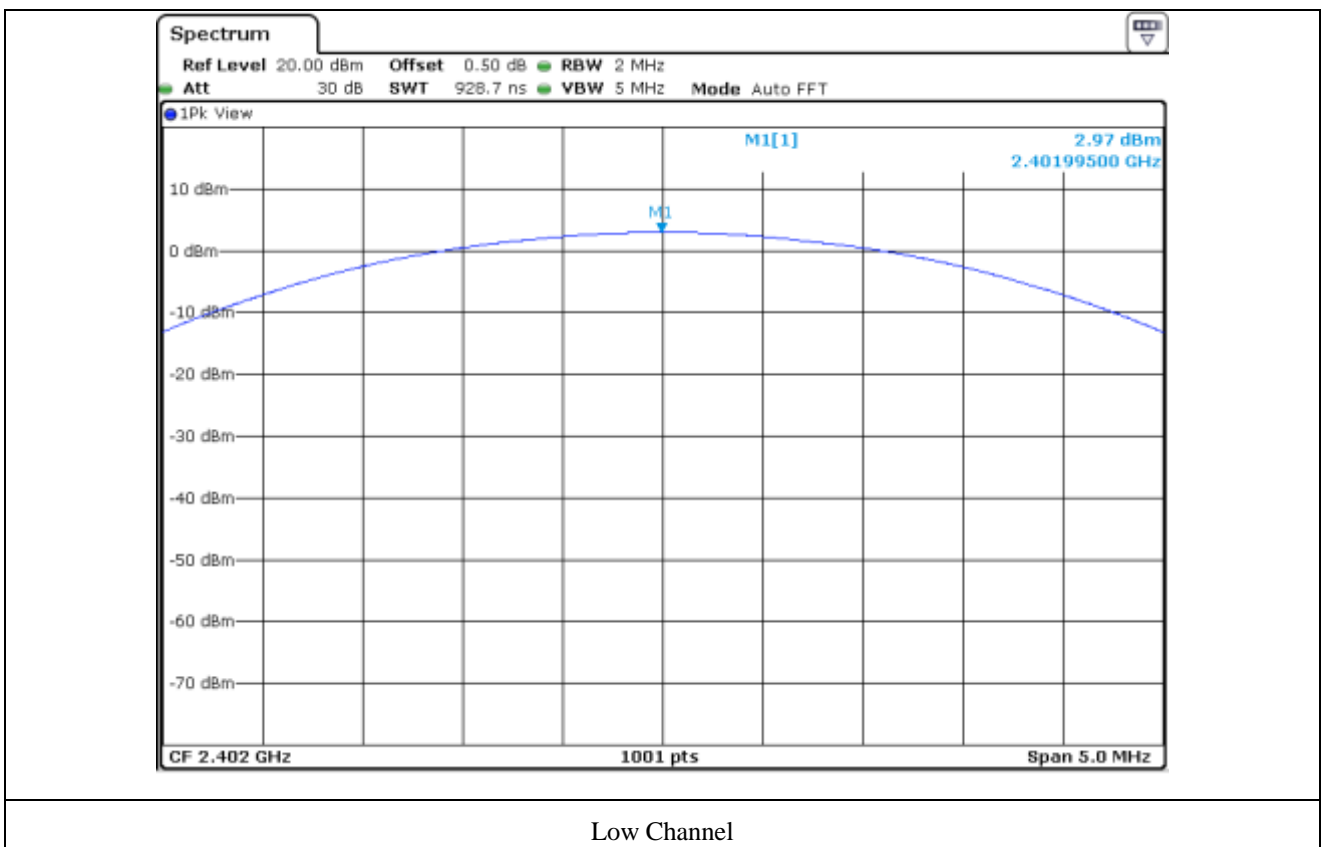

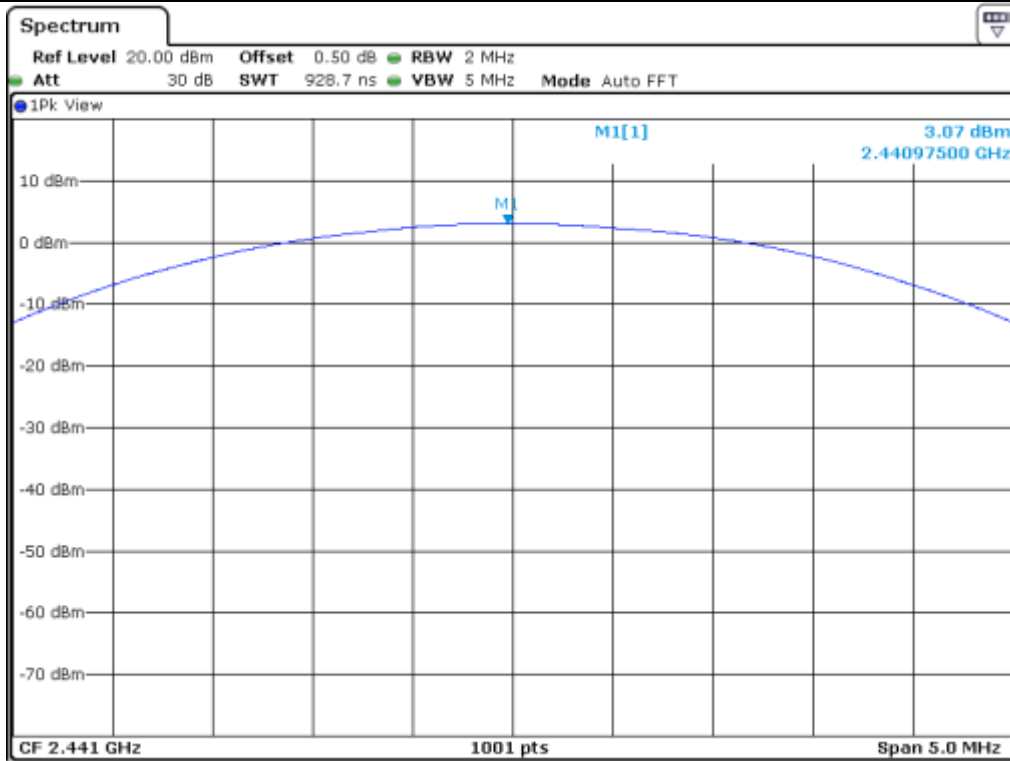

Middle Channel

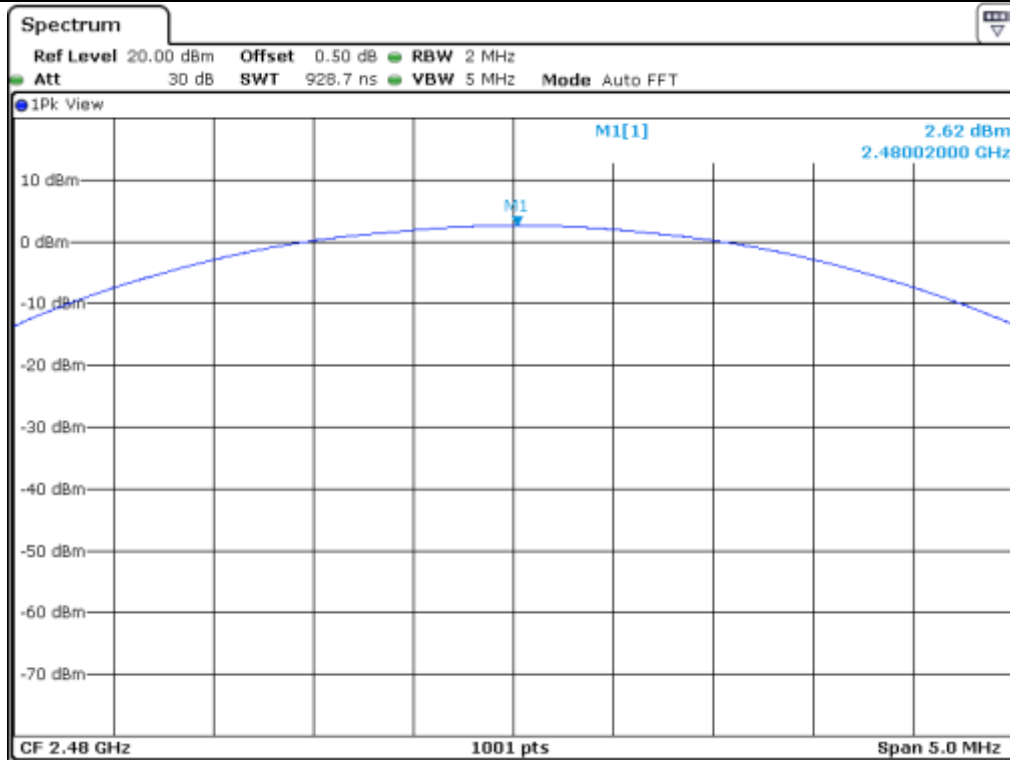

High Channel


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

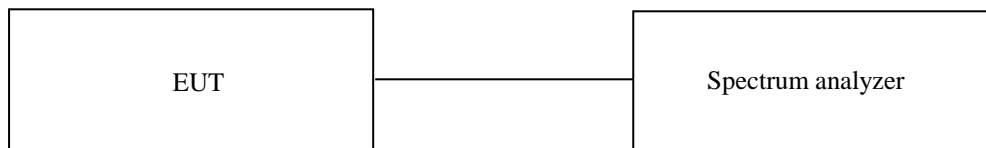

12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

12.4 Test Date


September 07, 2020 ~ September 11, 2020

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

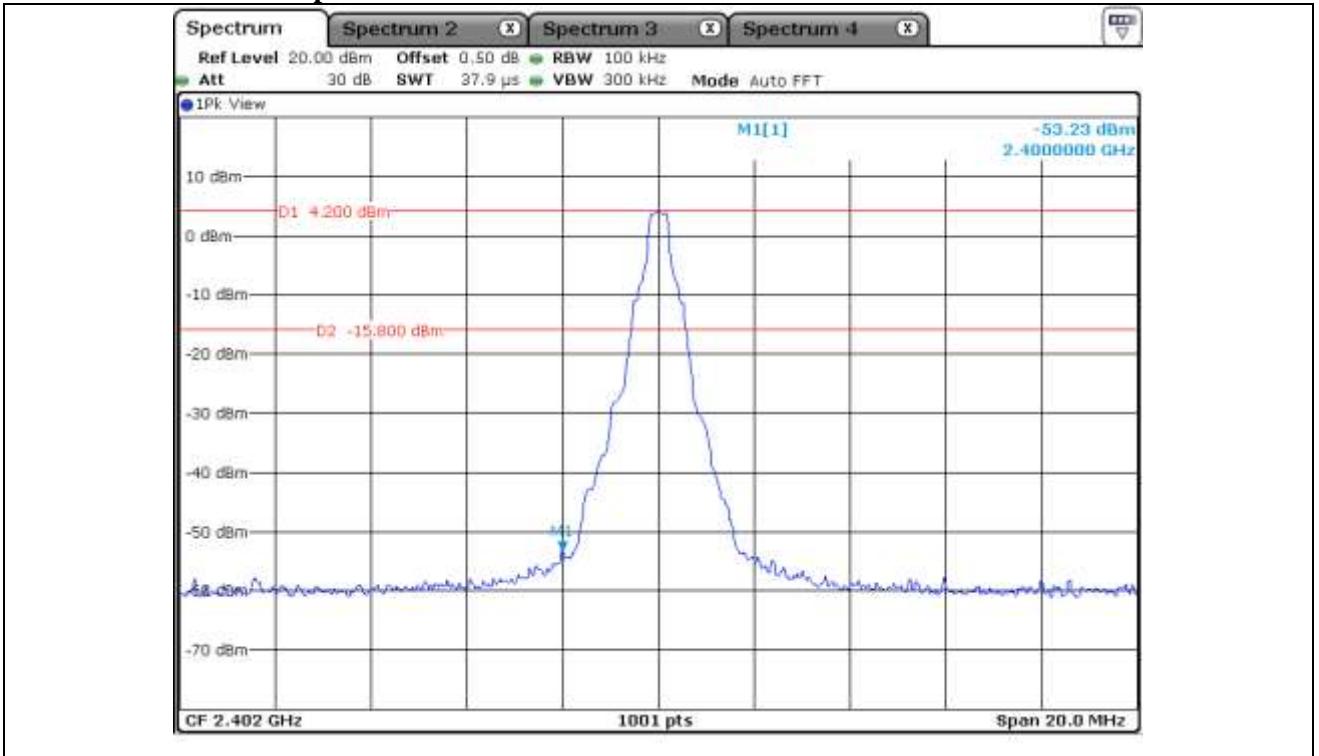


Low Channel

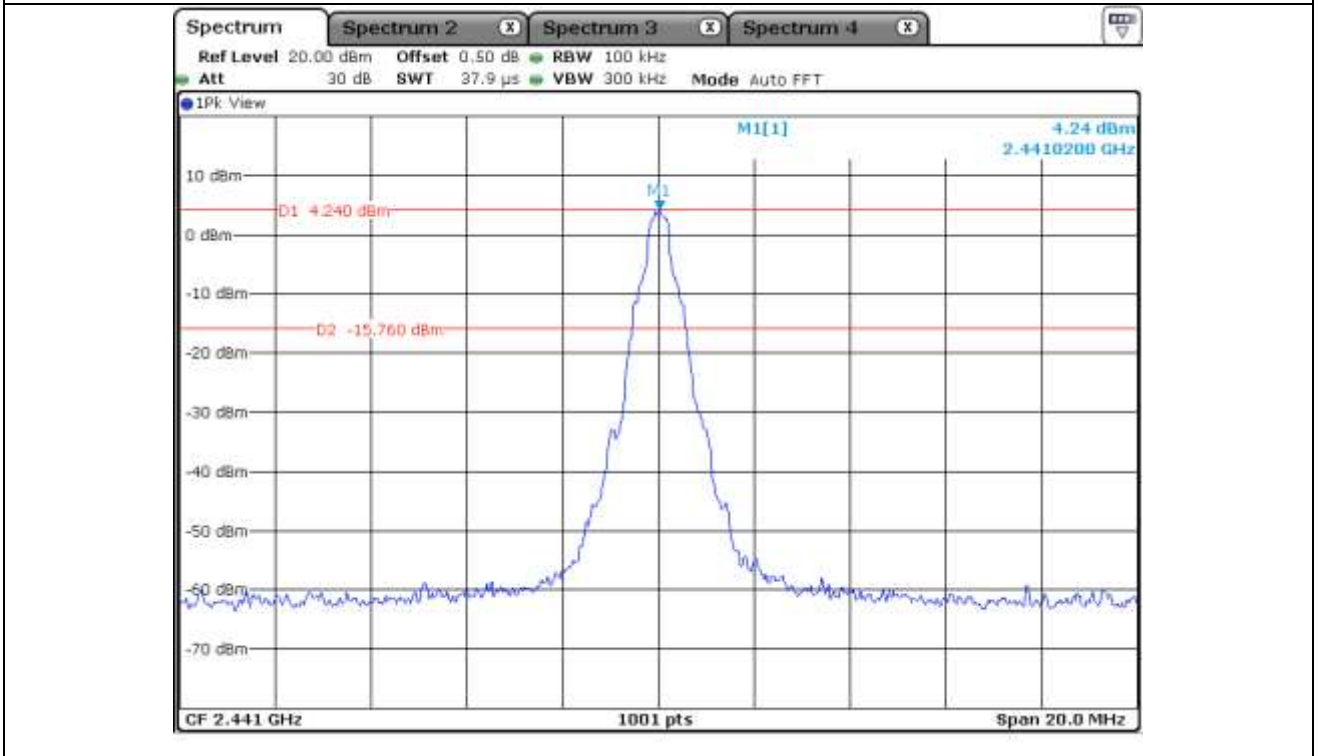


Middle Channel

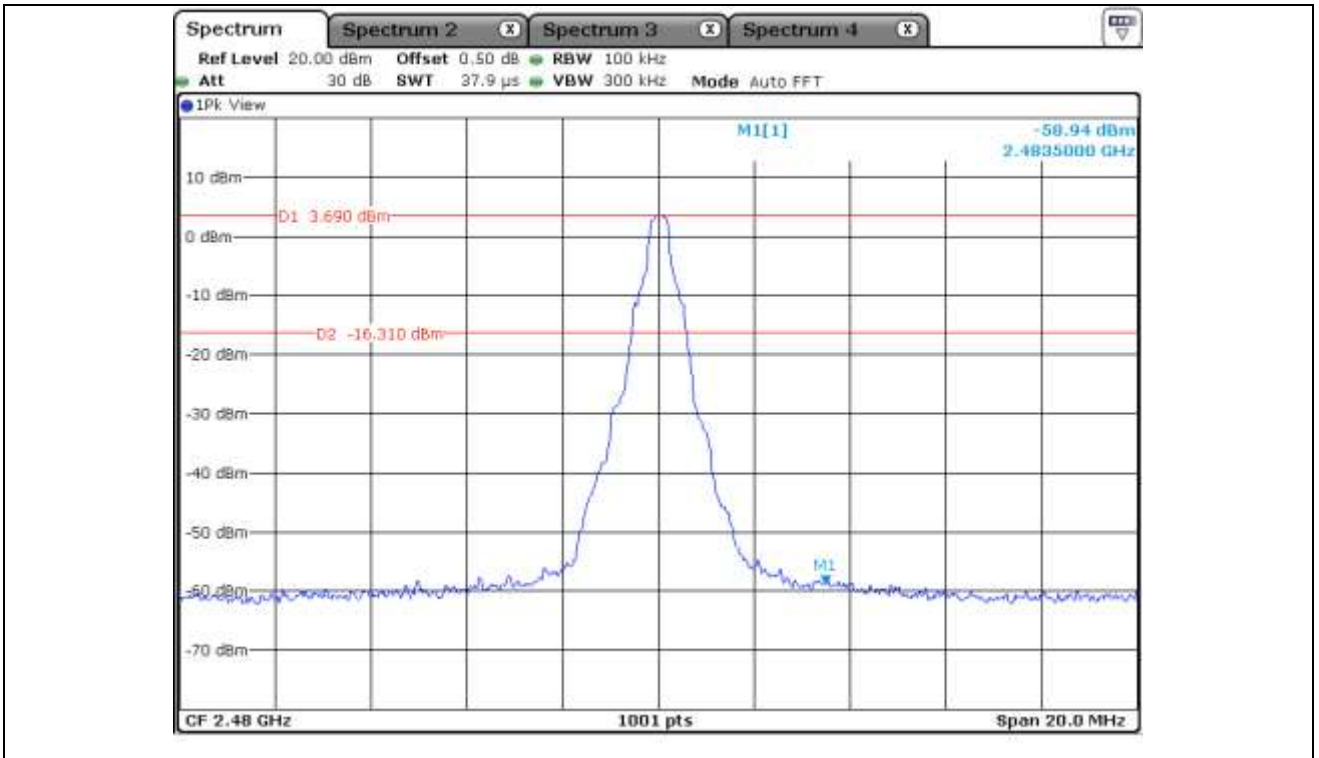


High Channel

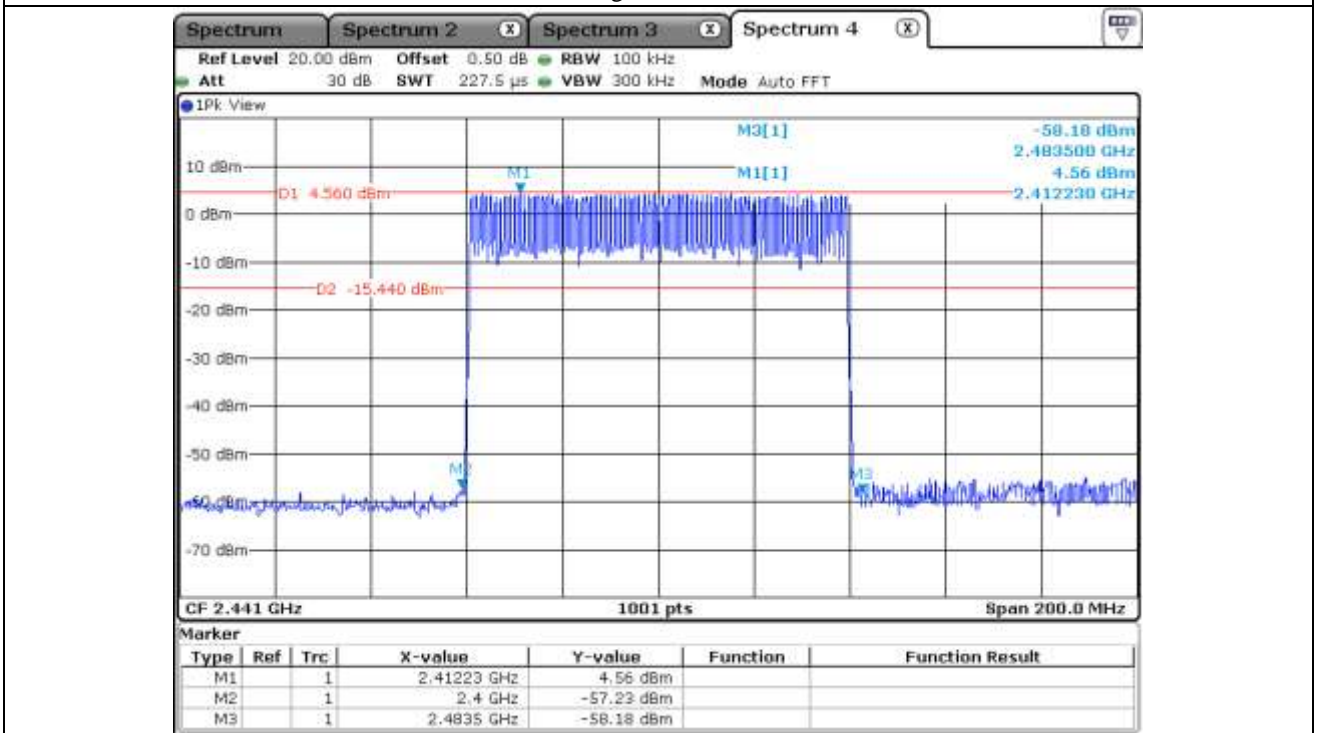


Hopping Mode

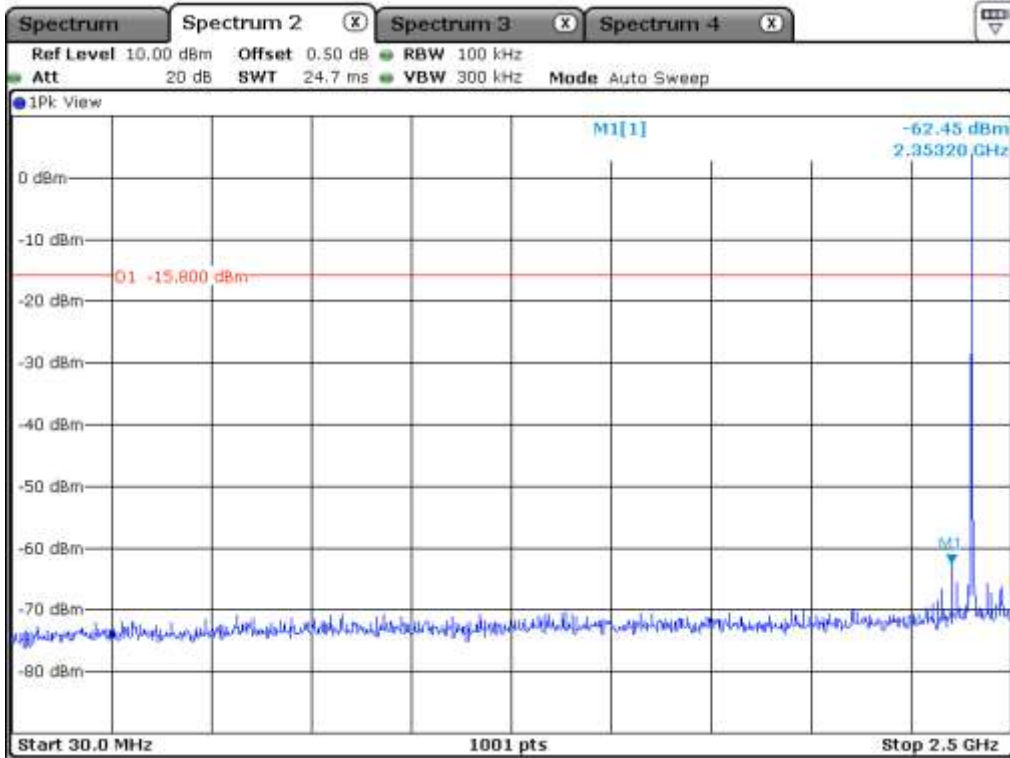


Low Channel

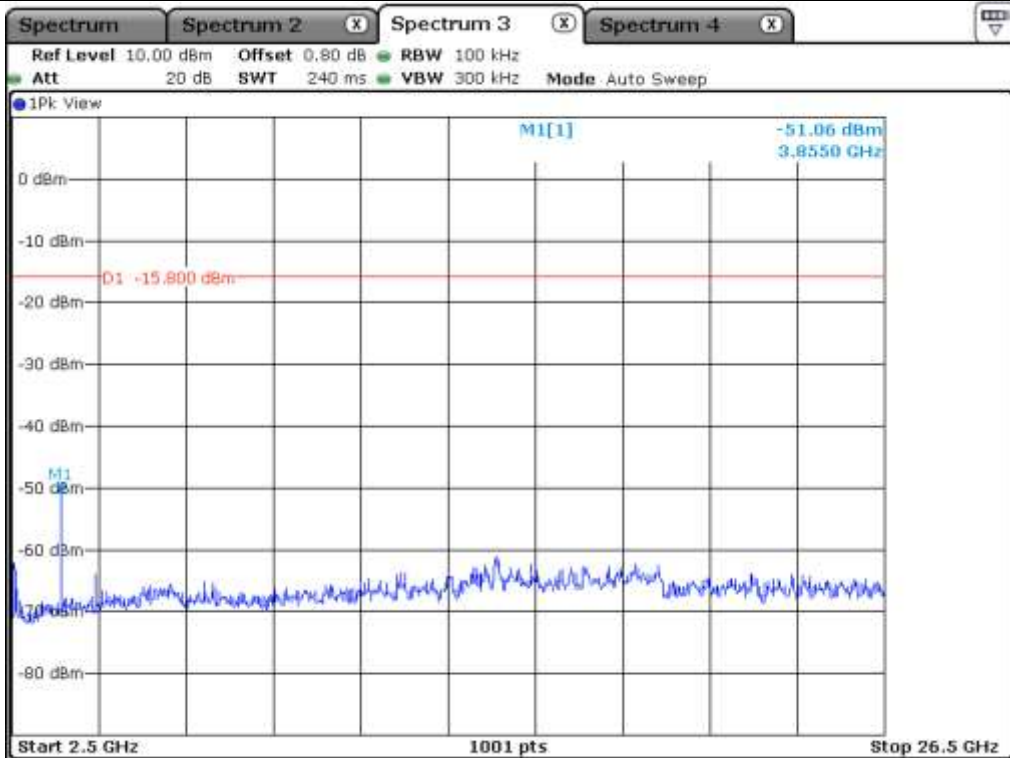


Low Channel

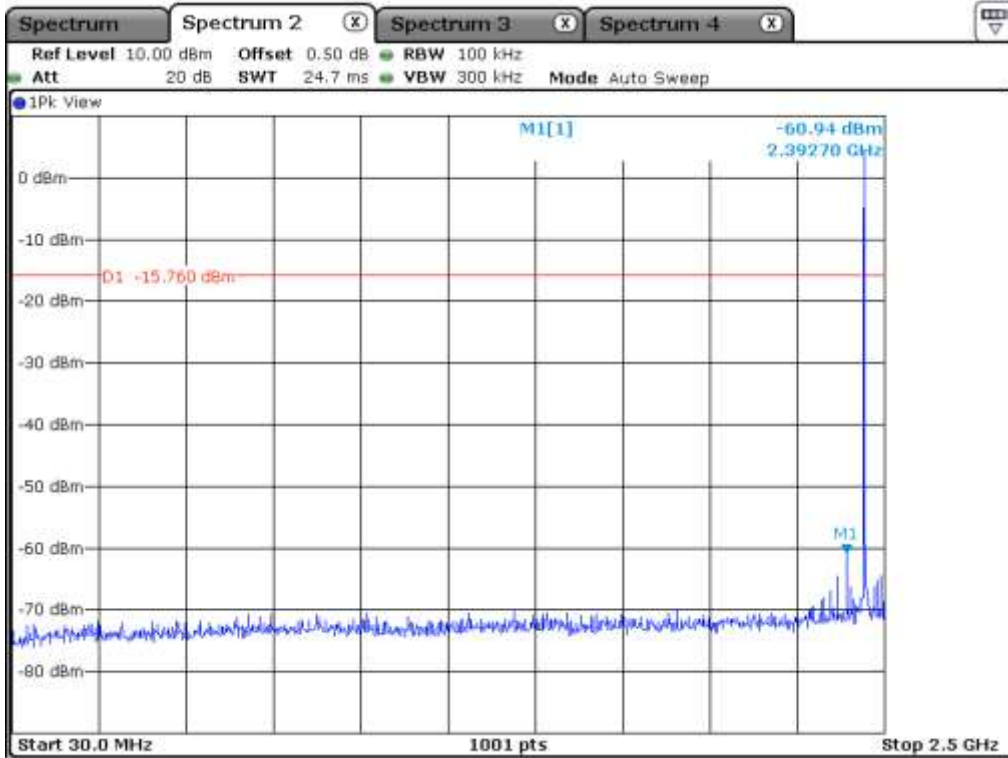


Middle Channel

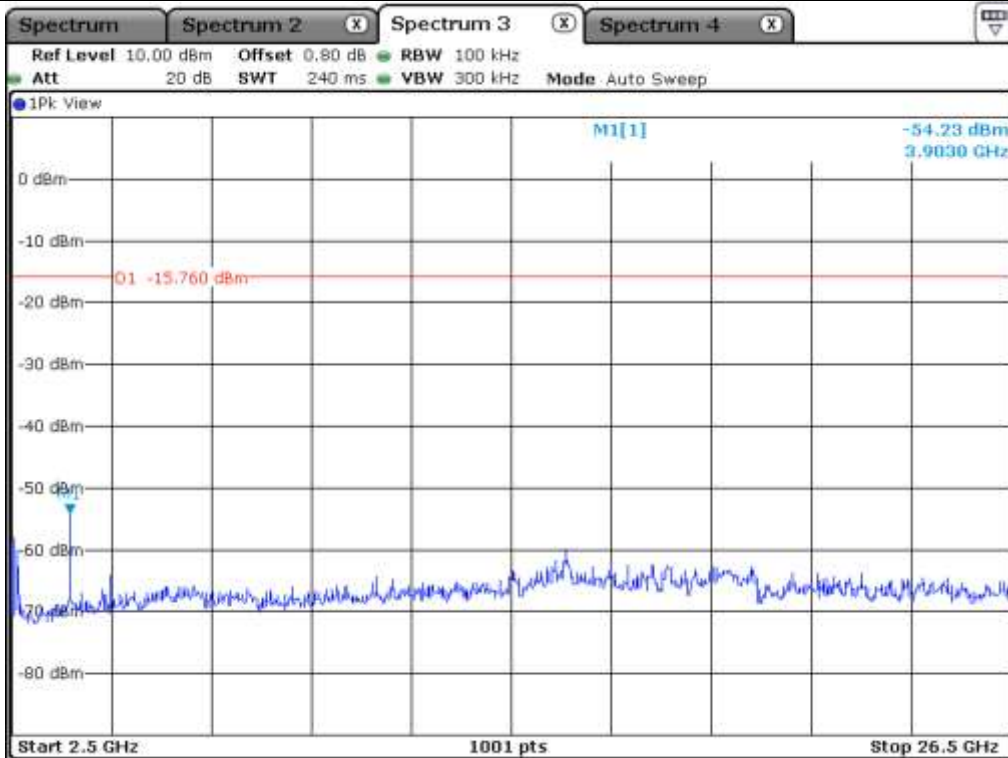


Middle Channel

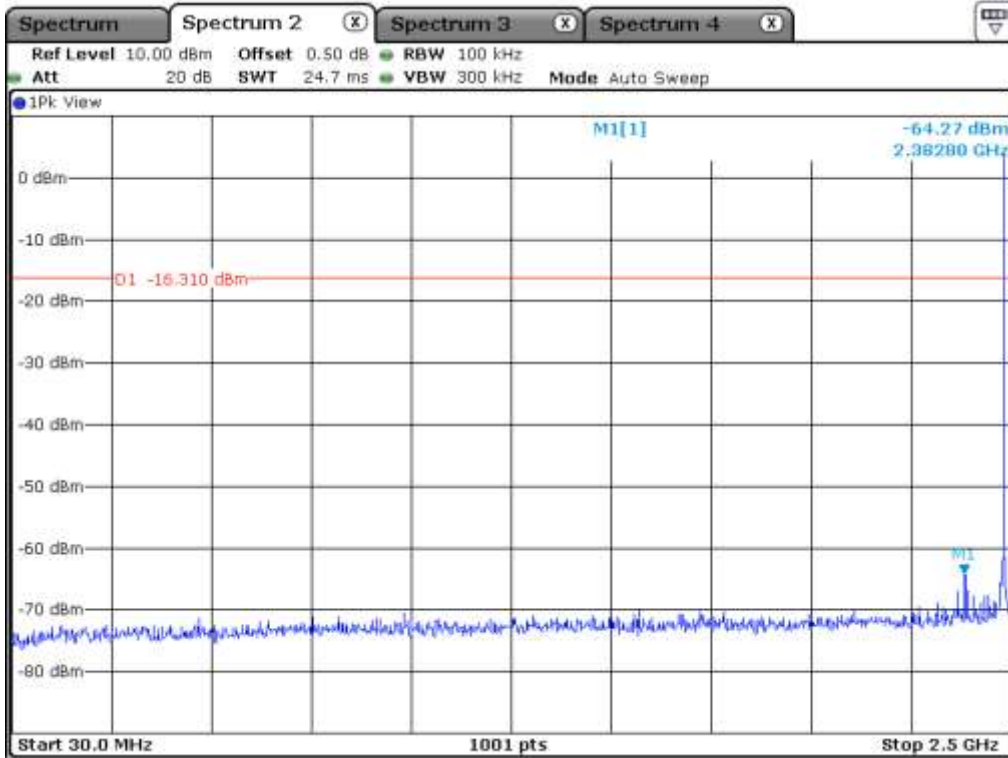


High Channel

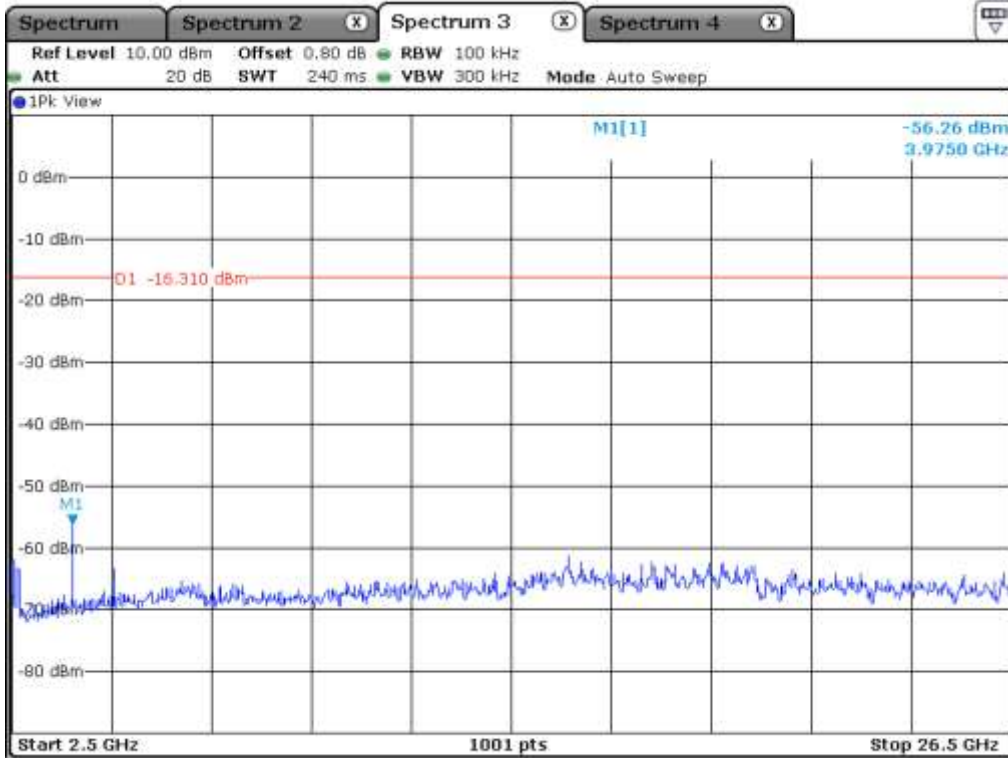

High Channel

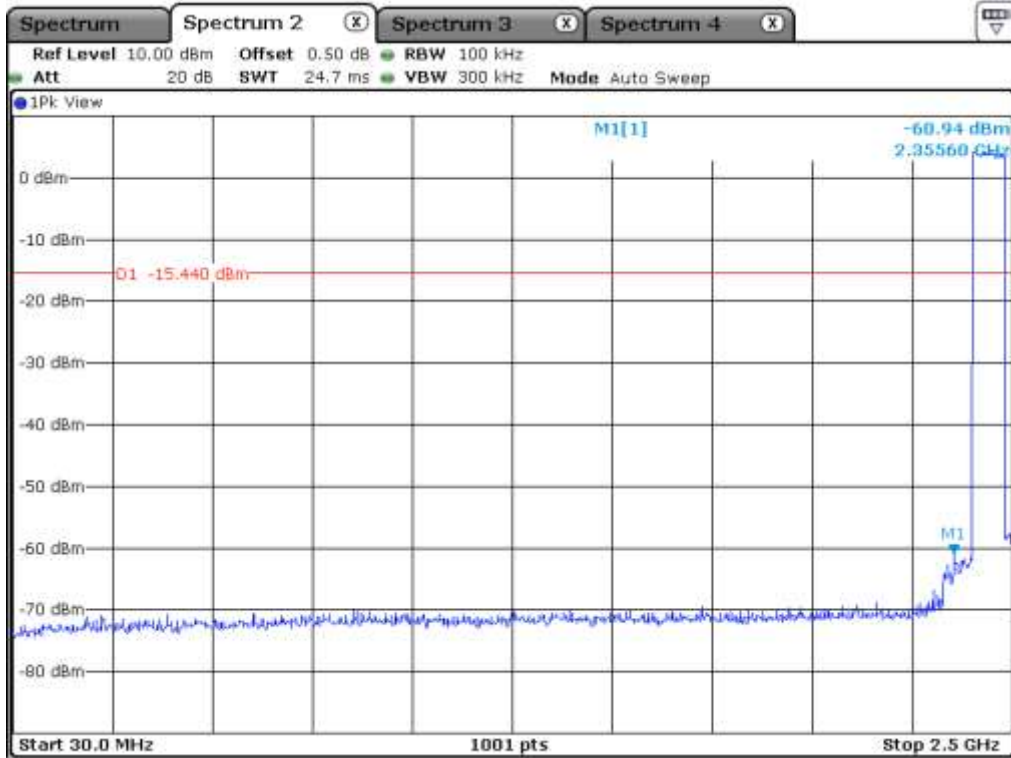


Hopping Mode

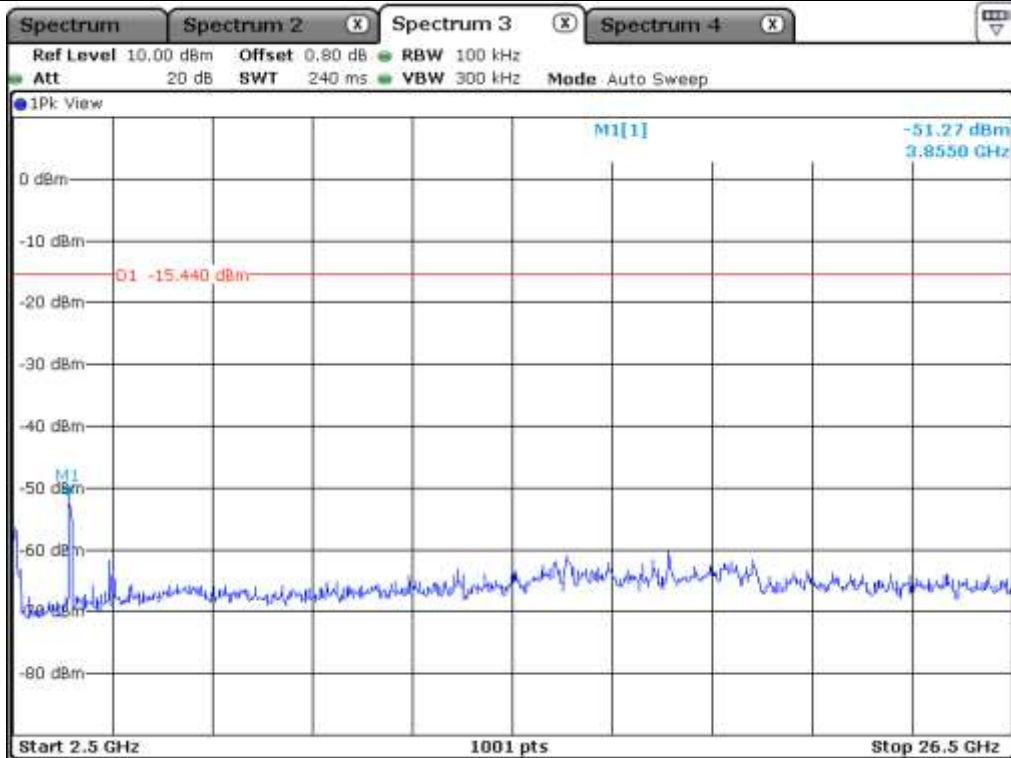


Hopping Mode


12.5.2 Test data for 2 Mbps

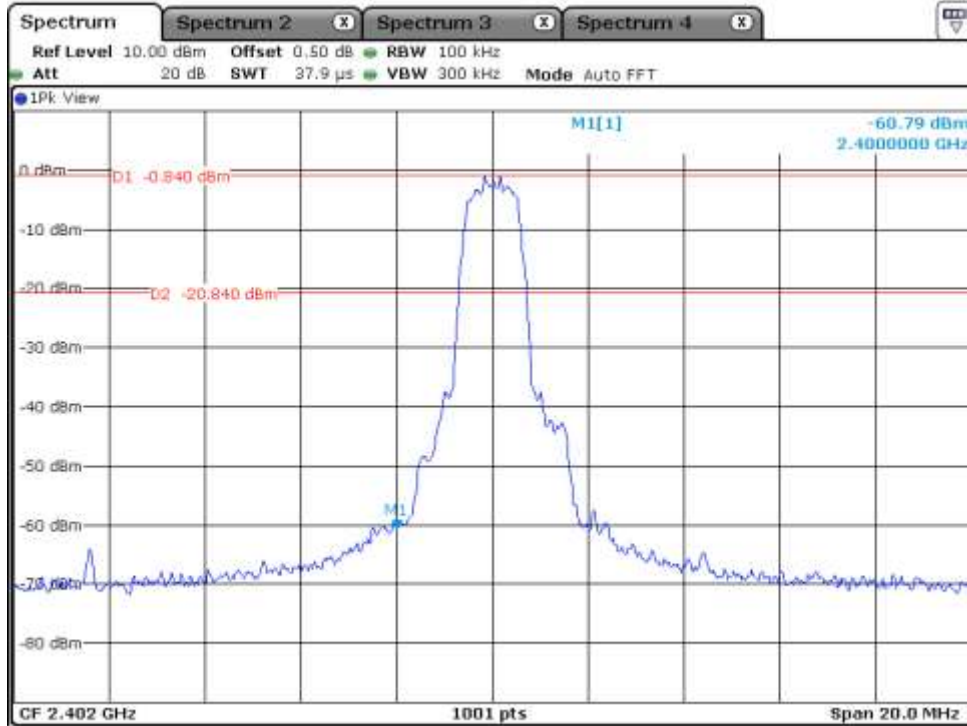


Low Channel

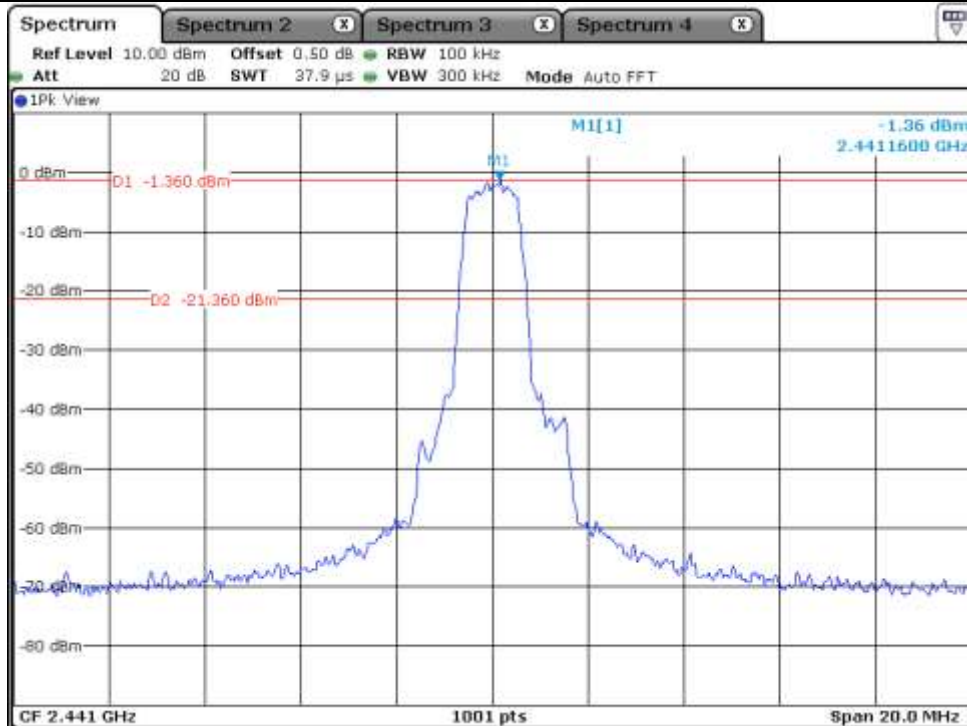


Middle Channel

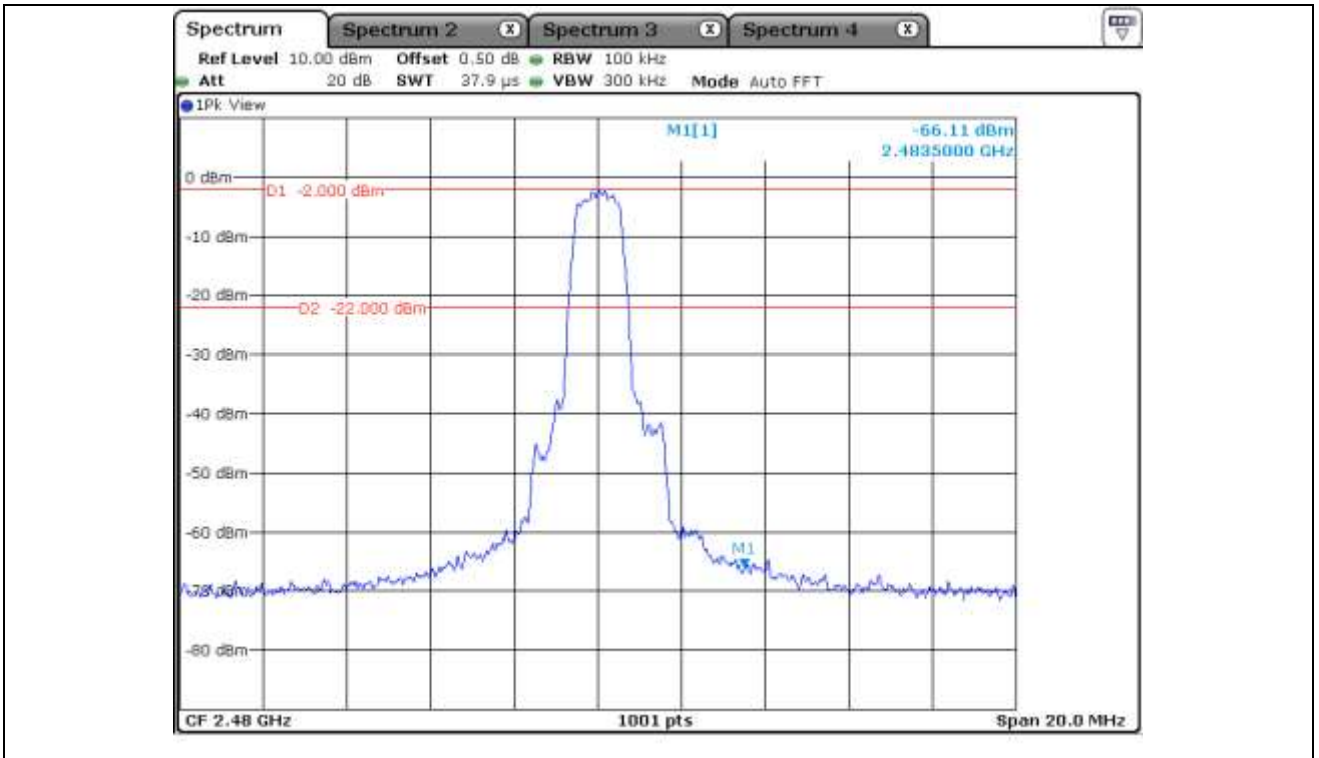


High Channel

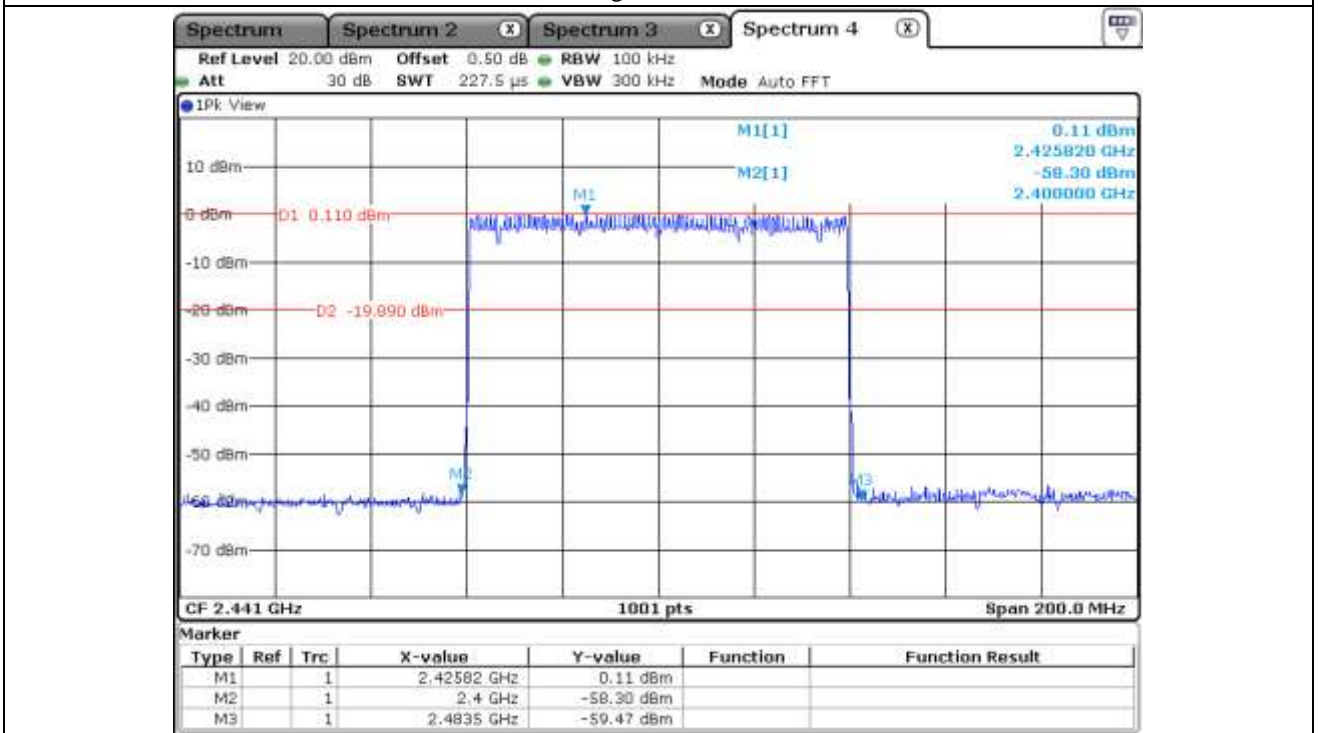


Hopping Mode

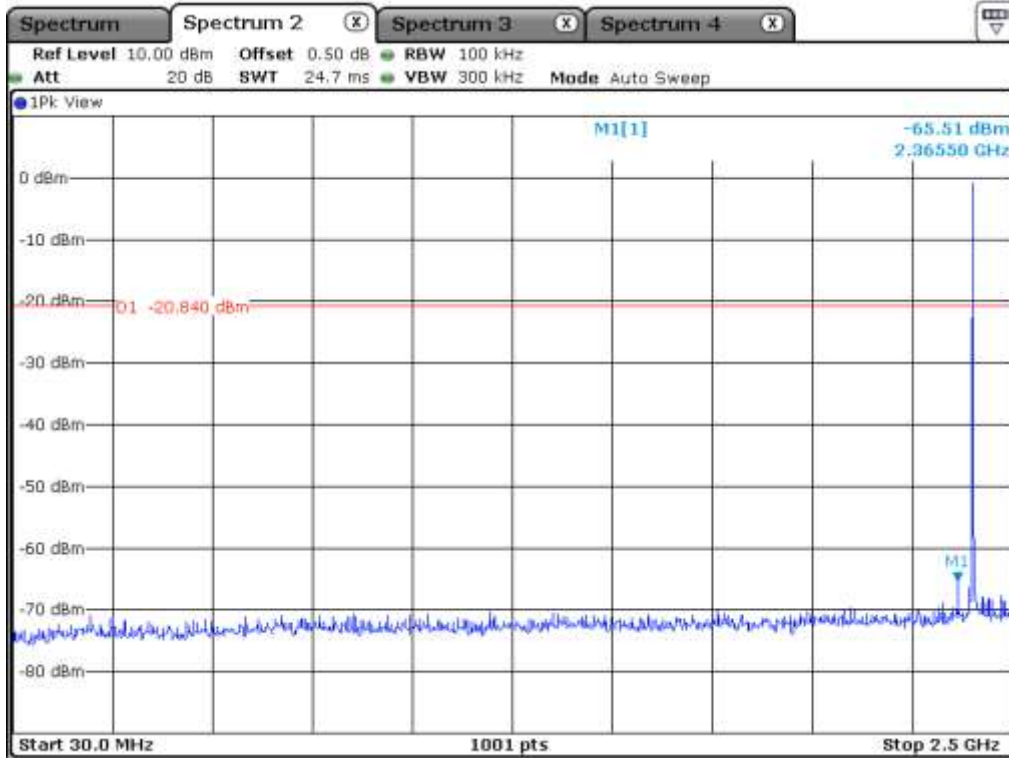


Low Channel

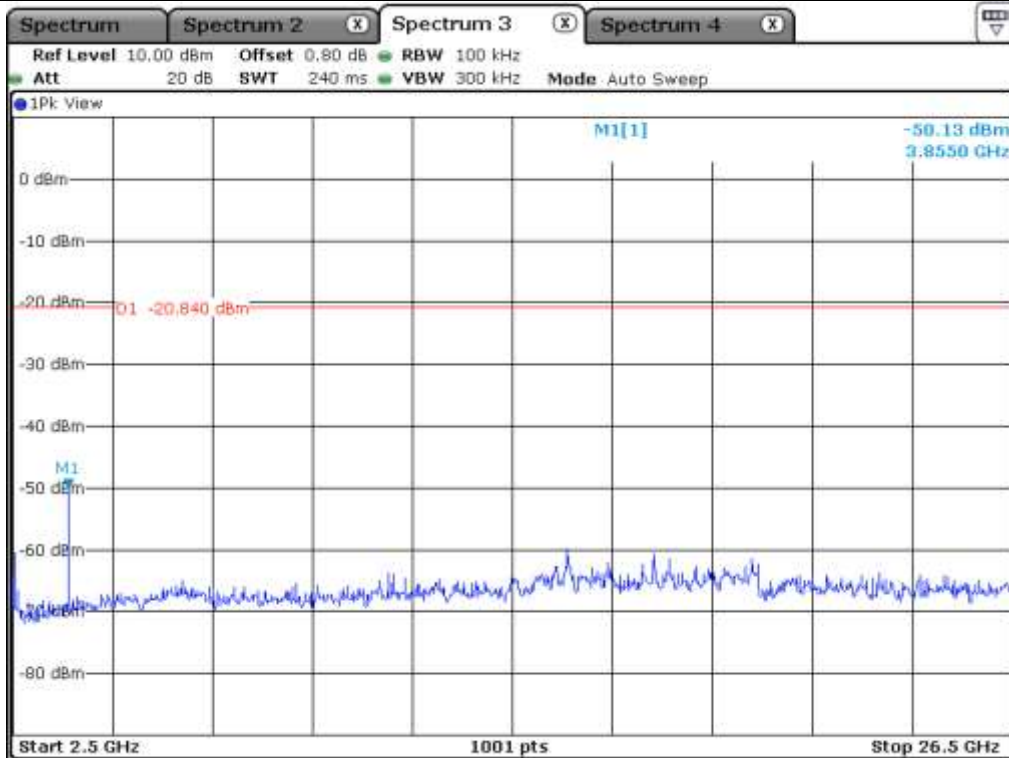


Low Channel

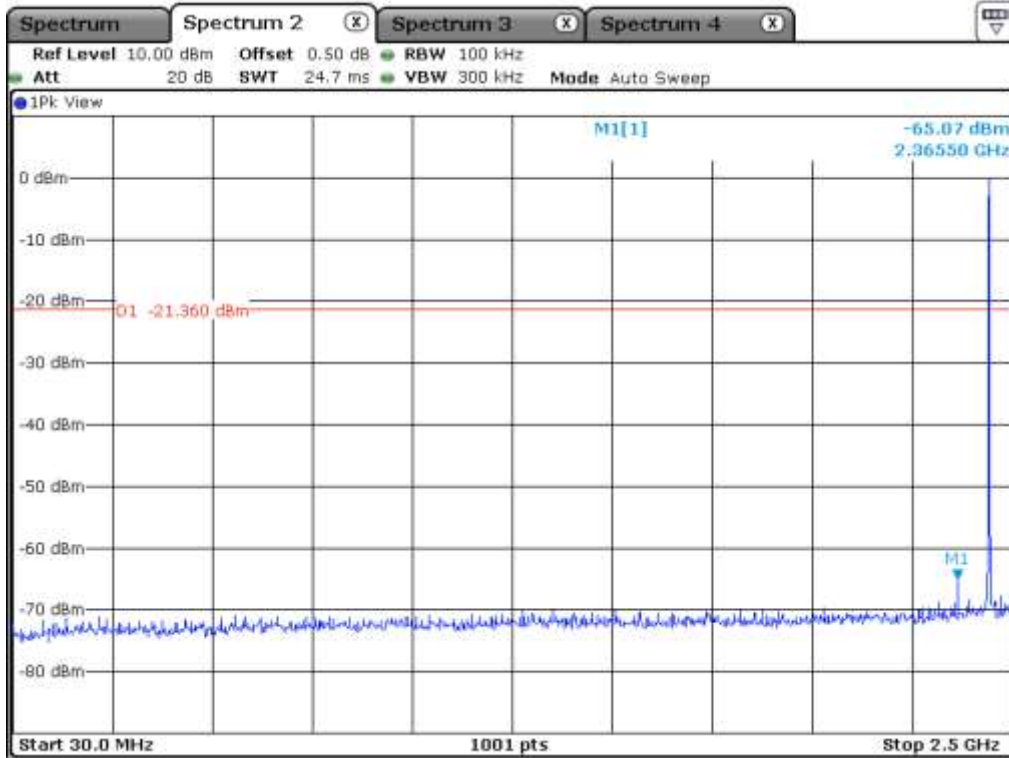


Middle Channel

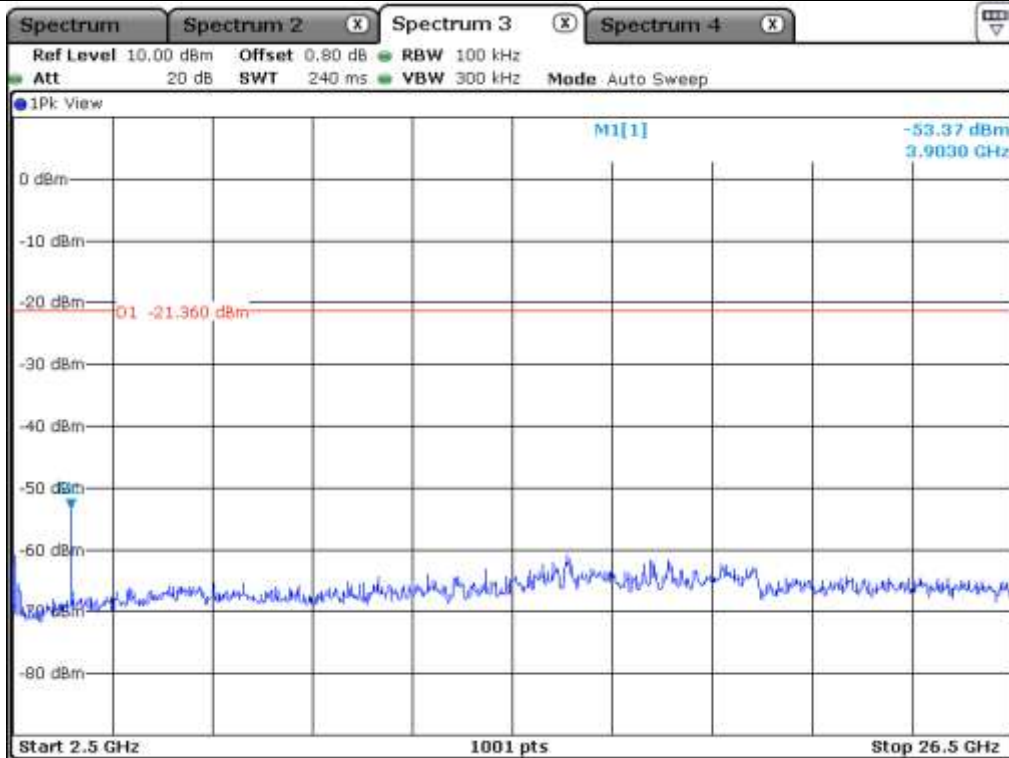


Middle Channel

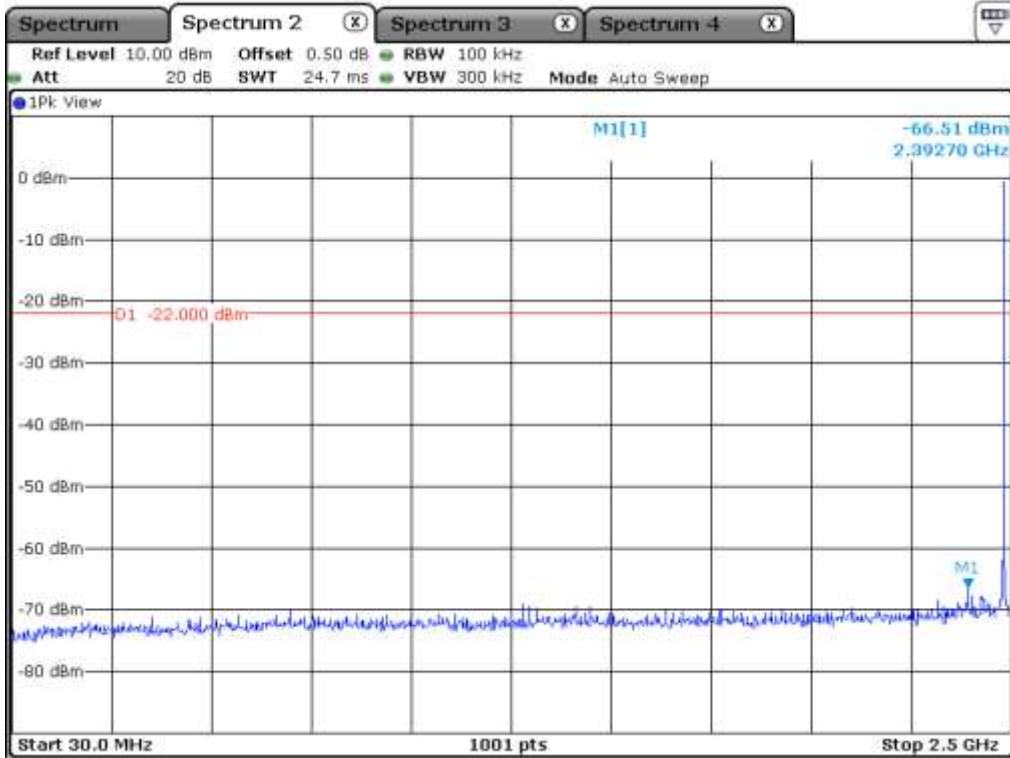


High Channel

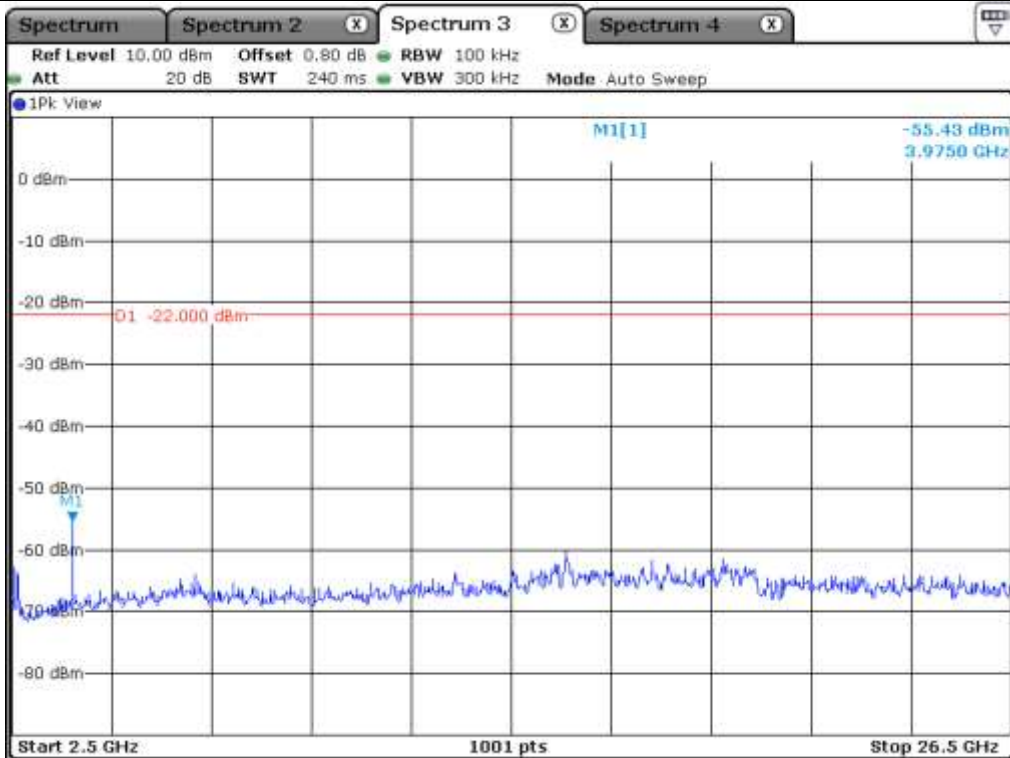

High Channel

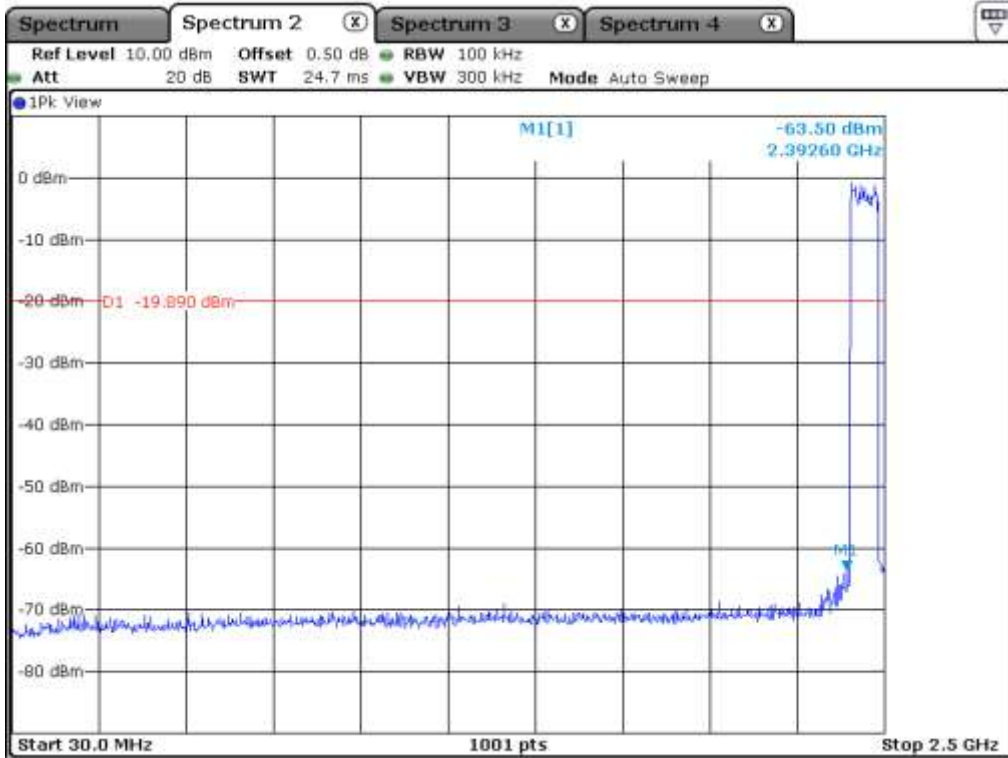


Hopping Mode

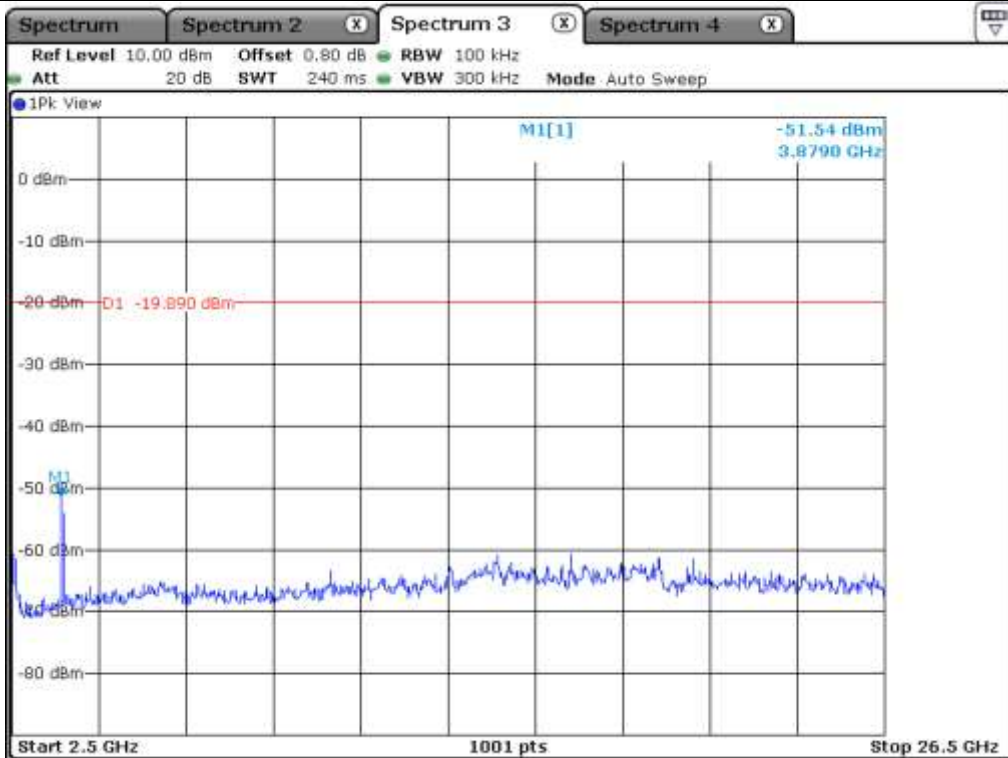


Hopping Mode


12.5.3 Test data for 3 Mbps

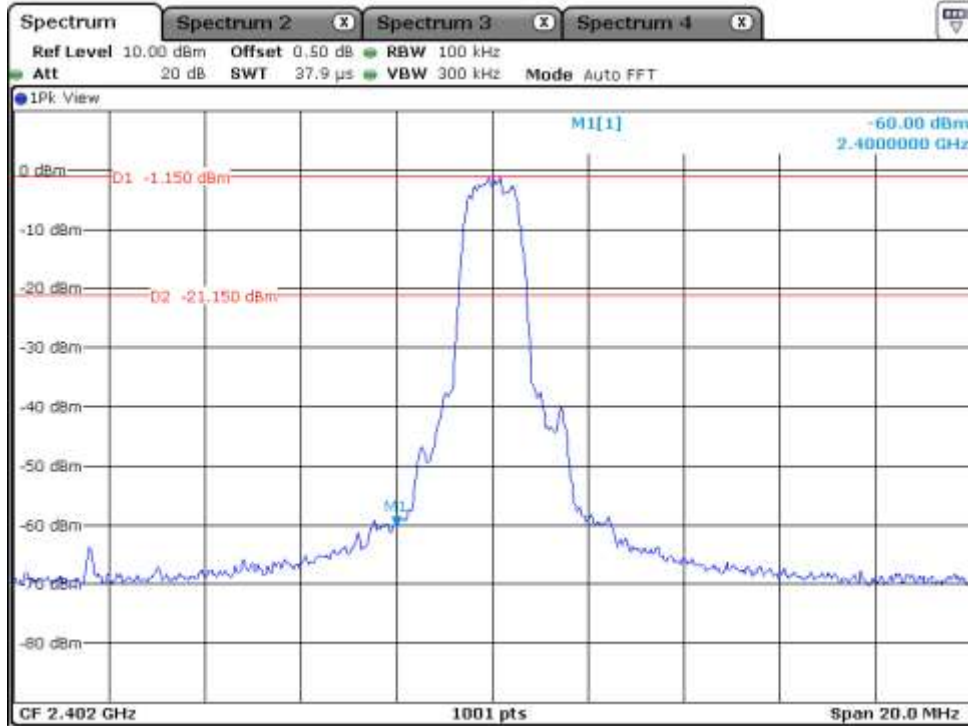


Low Channel

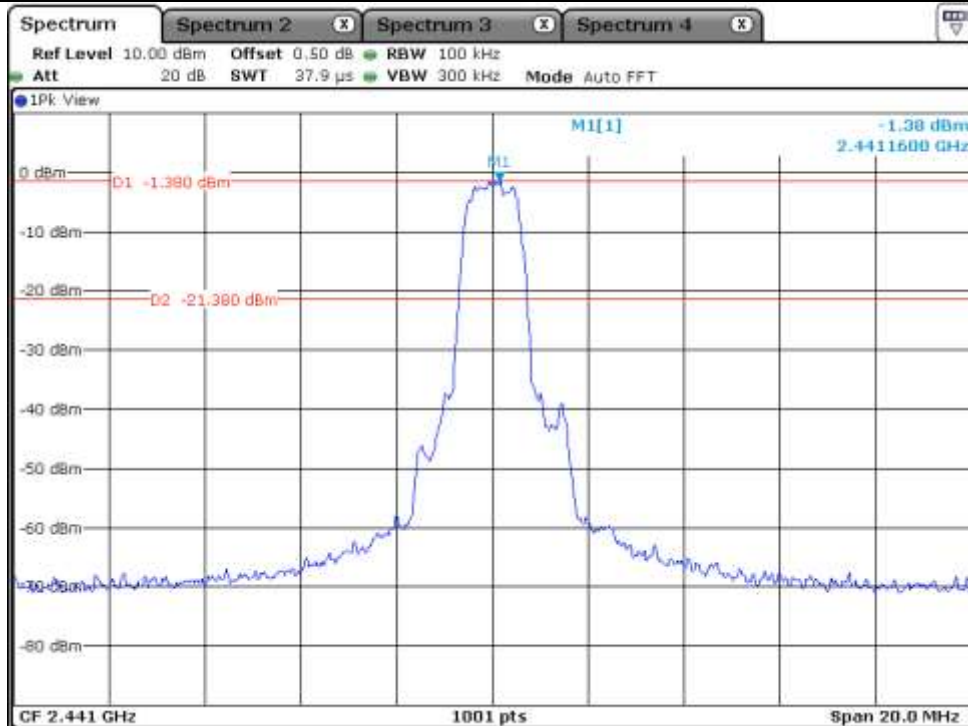


Middle Channel

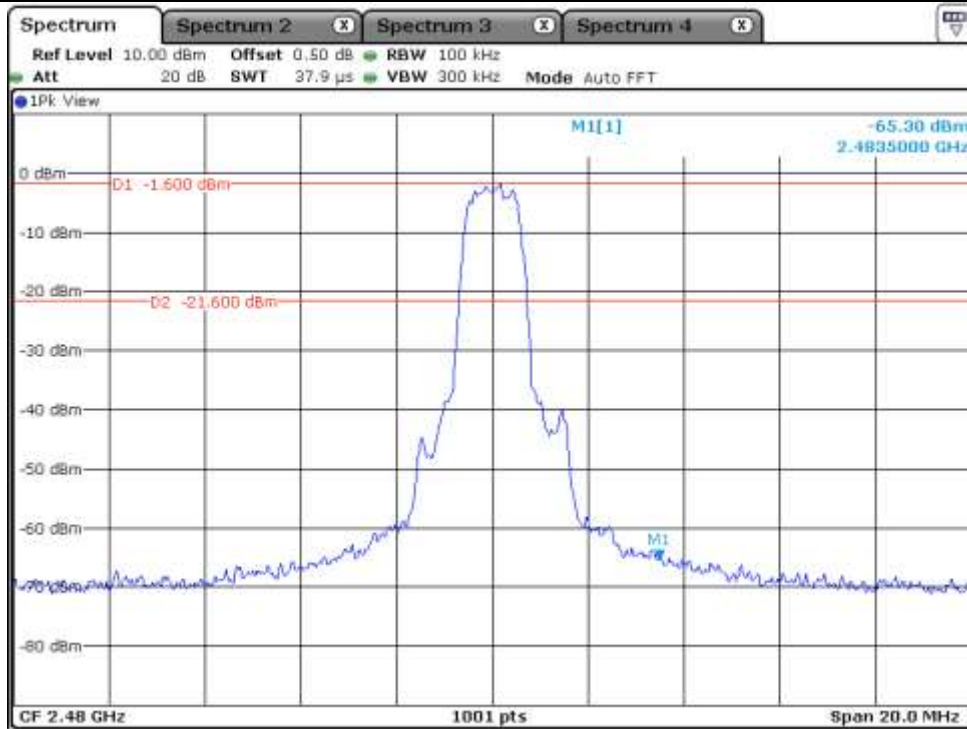


High Channel

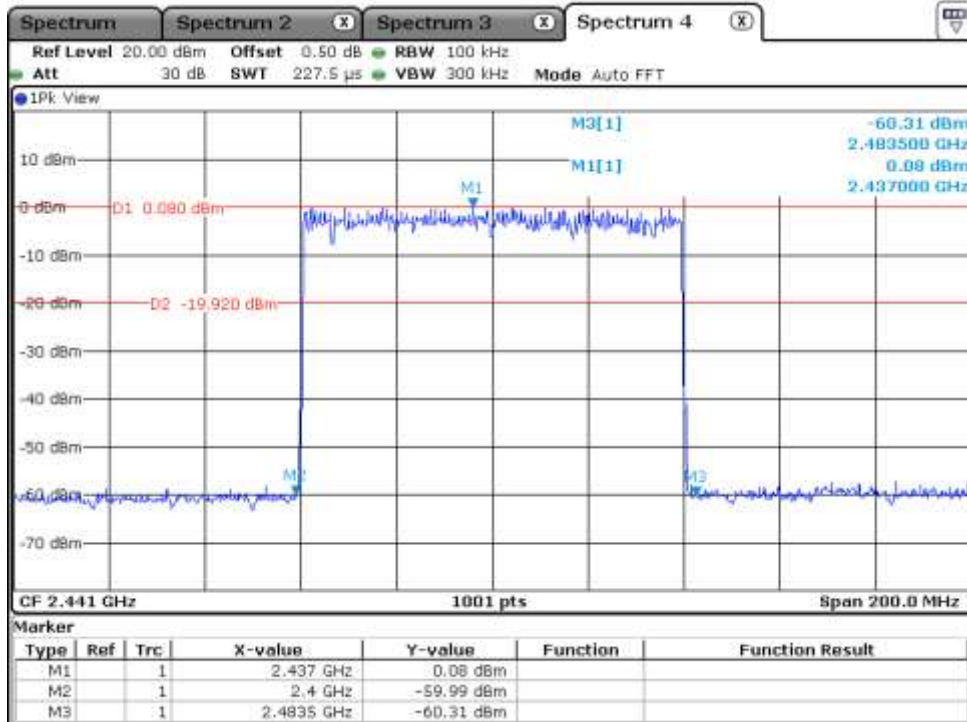


Hopping Mode

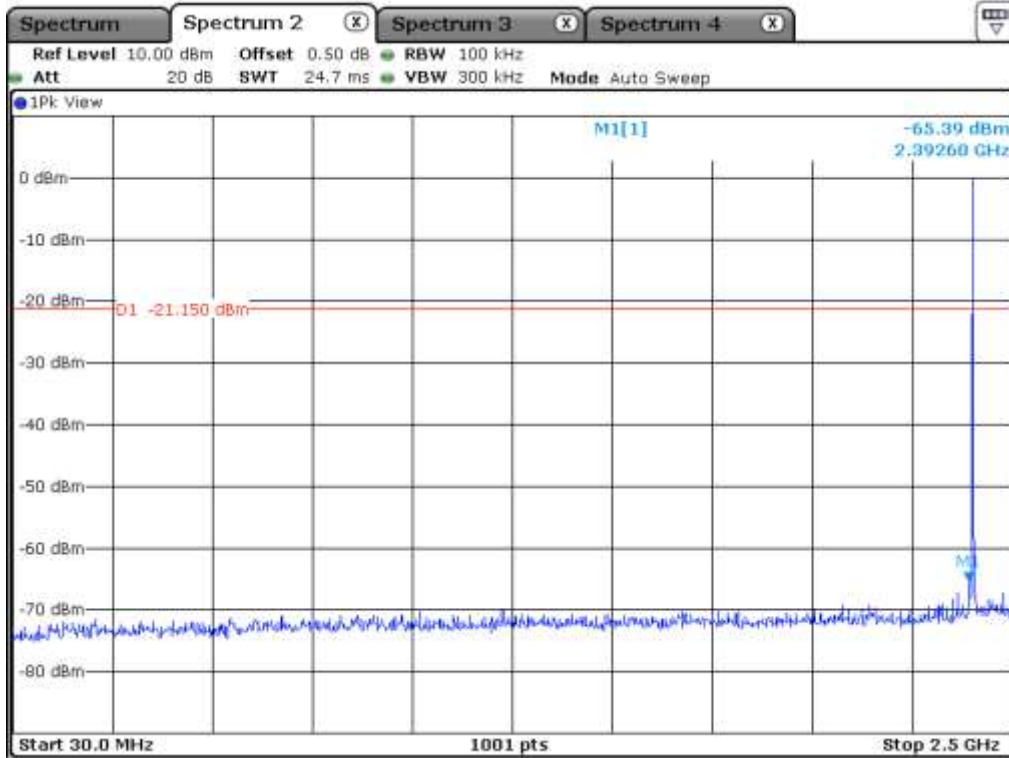


Low Channel

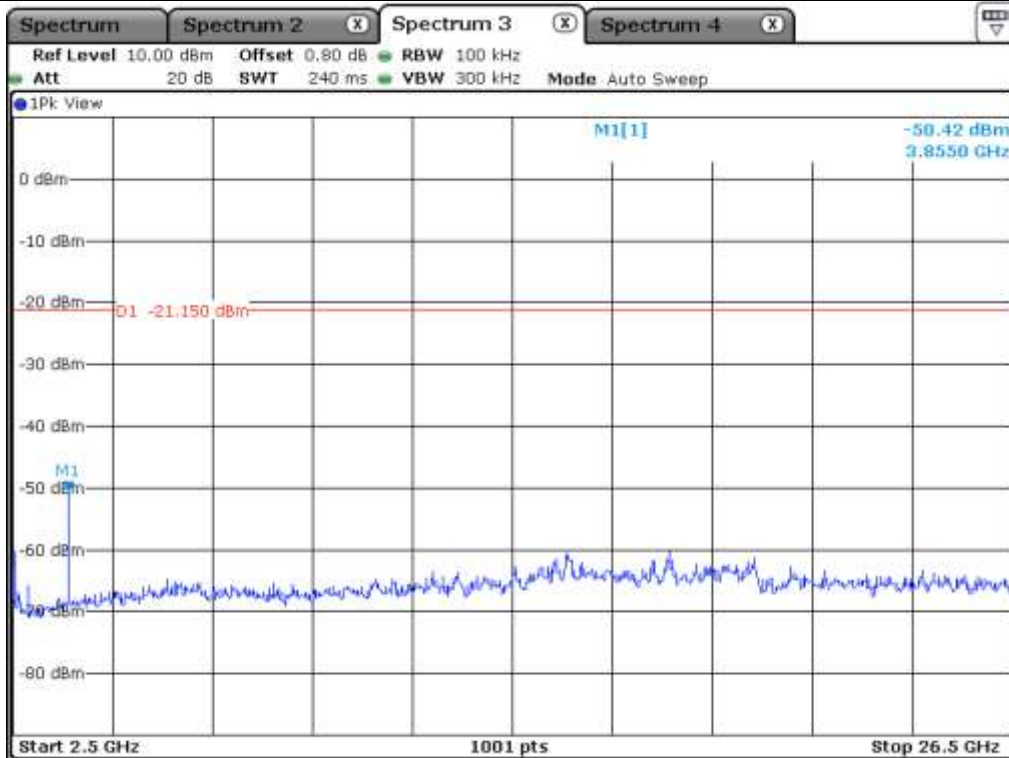


Low Channel

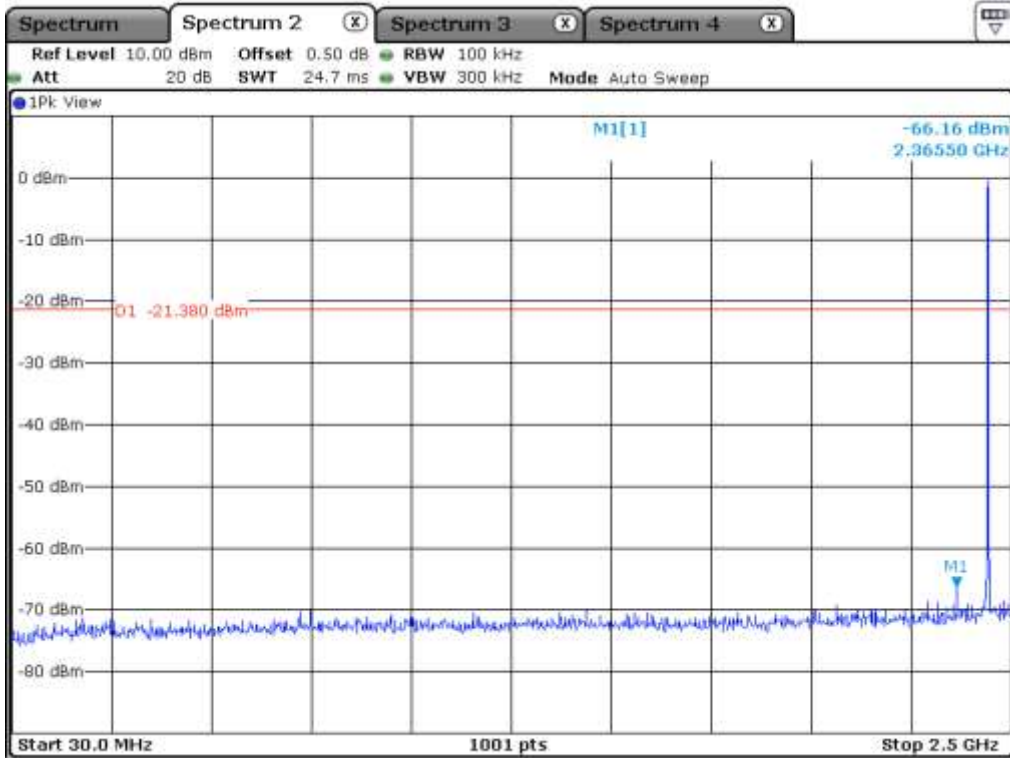


Middle Channel

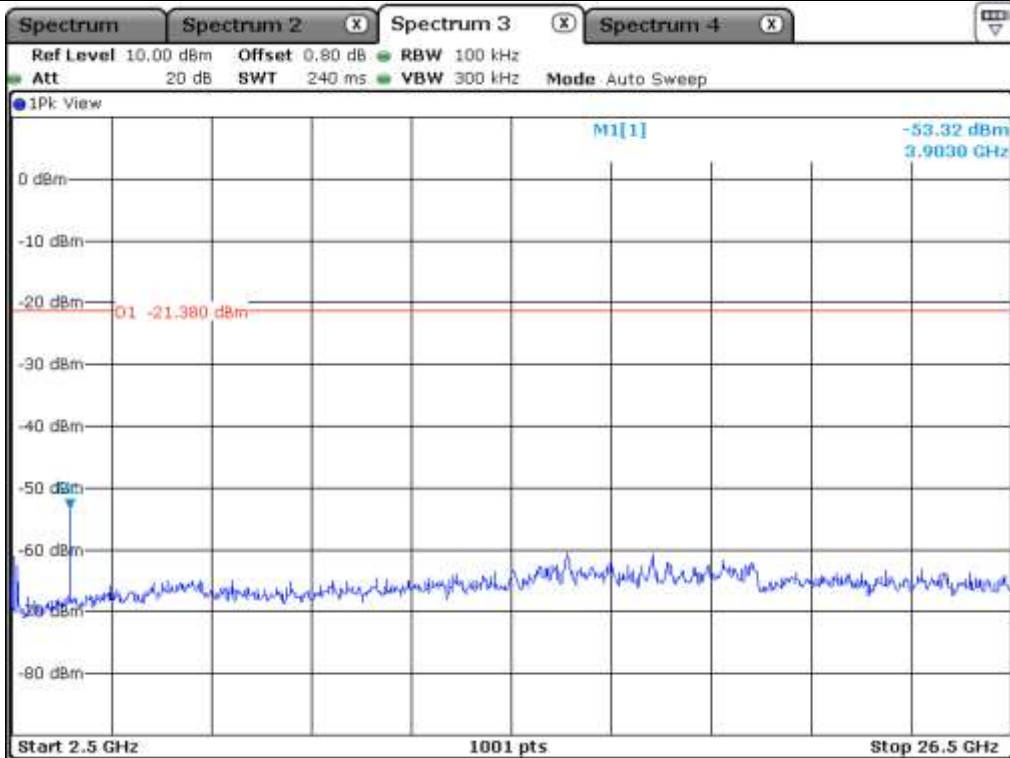


Middle Channel

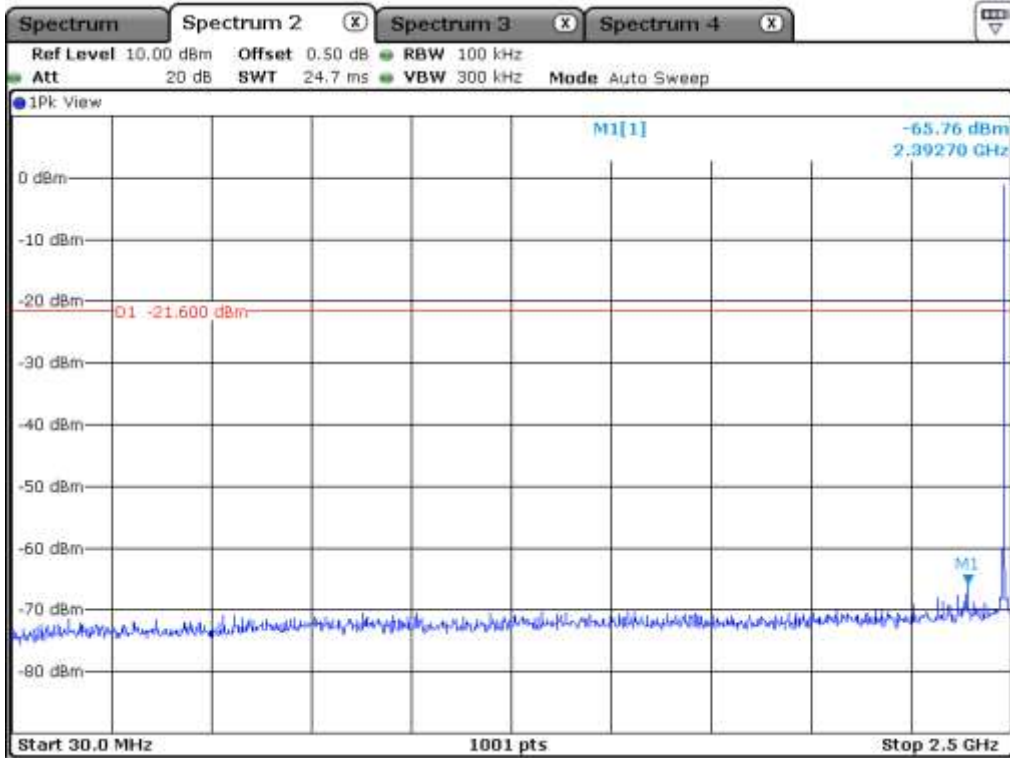


High Channel

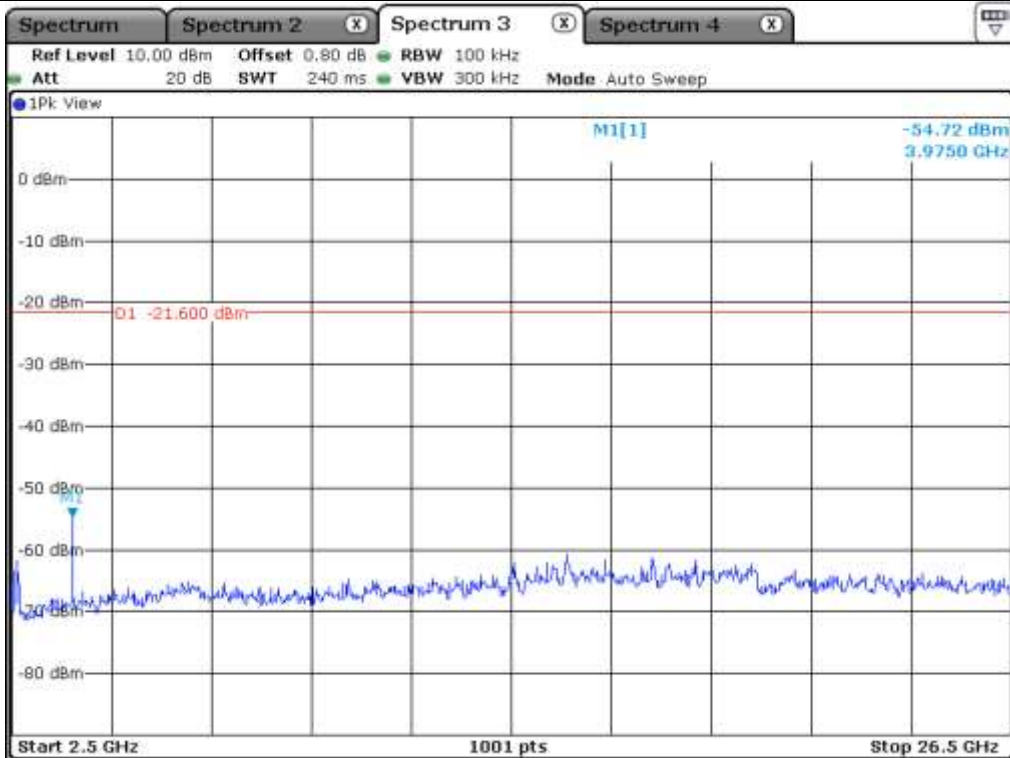

High Channel

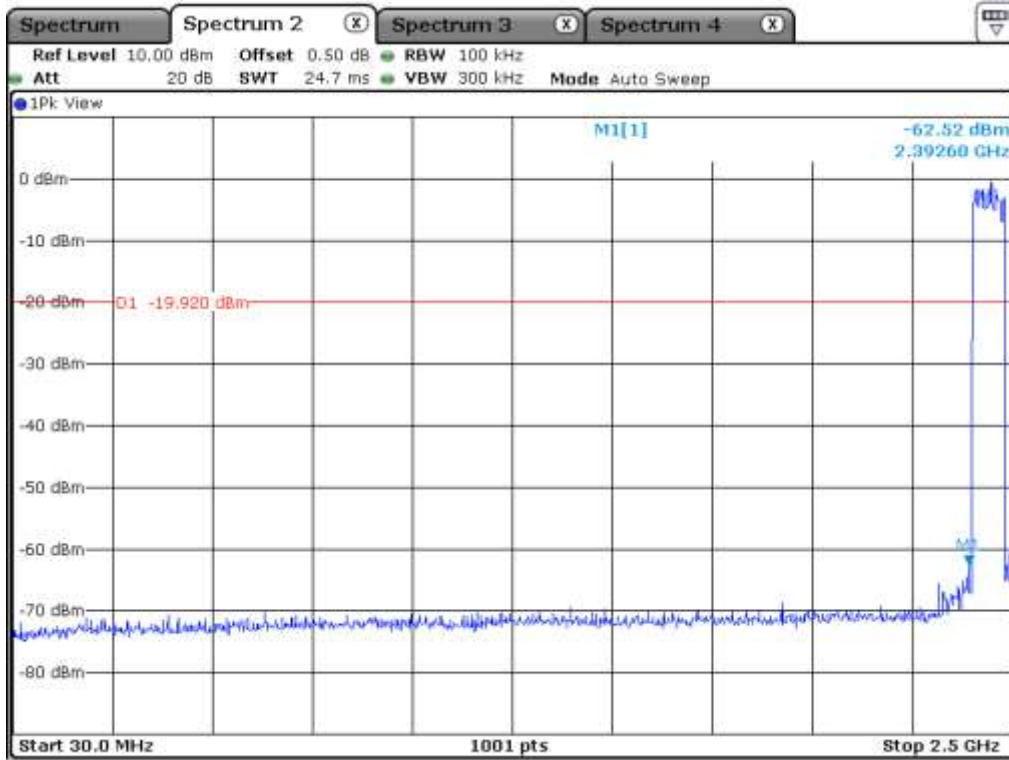

Hopping Mode

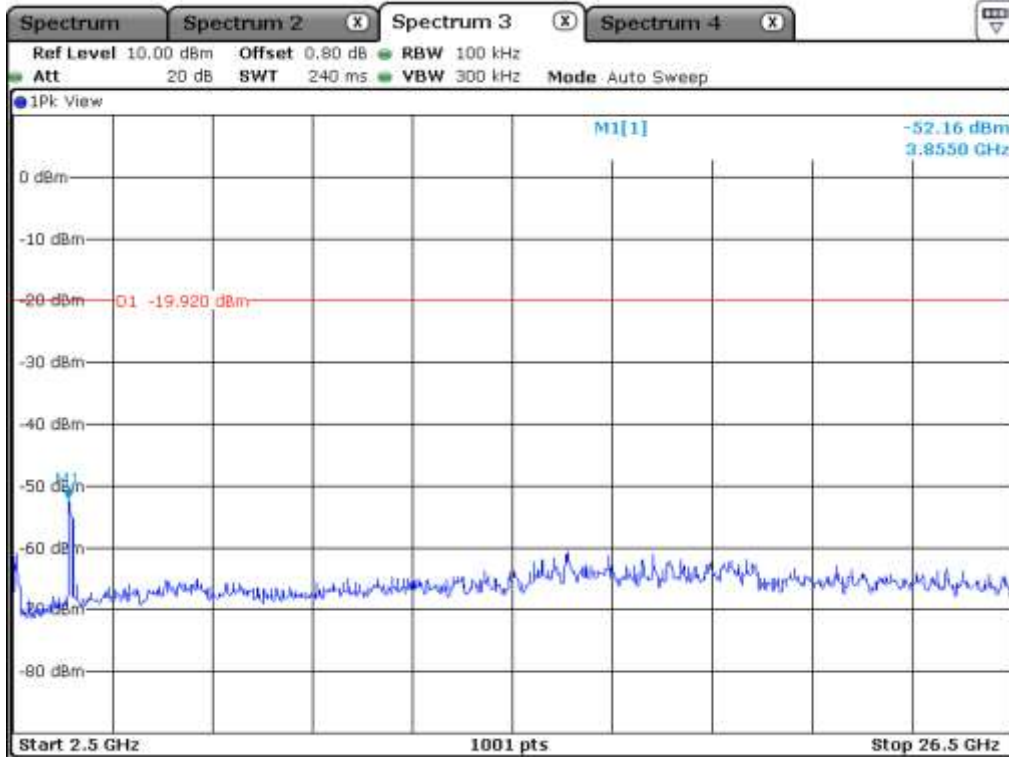

Hopping Mode

12.6 Test data for Transmitting mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band

12.6.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.01 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 348.757	14.76	Peak	H	26.90	3.07	-	44.73	74.00	29.27
2 351.847	4.91	Average	H	26.90	3.07	1.13	36.01	54.00	17.99
2 369.544	12.85	Peak	V	26.90	3.07	-	42.82	74.00	31.18
2 367.639	7.05	Average	V	26.90	3.07	1.13	38.15	54.00	15.85
Test Data for High Channel									
2 483.579	14.46	Peak	H	26.60	3.16	-	44.22	74.00	29.78
2 483.868	5.70	Average	H	26.60	3.16	1.13	36.59	54.00	17.41
2 486.635	14.12	Peak	V	26.60	3.16	-	43.88	74.00	30.12
2 483.524	7.27	Average	V	26.60	3.16	1.13	38.16	54.00	15.84

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

12.6.1.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 348.125	15.08	Peak	H	26.90	3.07	-	45.05	74.00	28.95
2 351.532	4.47	Average	H	26.90	3.07	1.13	35.57	54.00	18.43
2 370.094	12.34	Peak	V	26.90	3.07	-	42.31	74.00	31.69
2 367.169	7.12	Average	V	26.90	3.07	1.13	38.22	54.00	15.78
Test Data for High Channel									
2 483.532	15.02	Peak	H	26.60	3.16	-	44.78	74.00	29.22
2 483.533	5.47	Average	H	26.60	3.16	1.13	36.36	54.00	17.64
2 487.062	16.35	Peak	V	26.60	3.16	-	46.11	74.00	27.89
2 483.591	7.77	Average	V	26.60	3.16	1.13	38.66	54.00	15.34

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

12.6.1.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.01 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 348.489	14.47	Peak	H	26.90	3.07	-	44.44	74.00	29.56
2 351.882	4.13	Average	H	26.90	3.07	1.13	35.23	54.00	18.77
2 369.510	14.84	Peak	V	26.90	3.07	-	44.81	74.00	29.19
2 367.417	4.40	Average	V	26.90	3.07	1.13	35.50	54.00	18.50
Test Data for High Channel									
2 483.855	15.33	Peak	H	26.60	3.16	-	45.09	74.00	28.91
2 483.597	8.03	Average	H	26.60	3.16	1.13	38.92	54.00	15.08
2 486.541	14.47	Peak	V	26.60	3.16	-	44.23	74.00	29.77
2 483.579	7.76	Average	V	26.60	3.16	1.13	38.65	54.00	15.35

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.01 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.000	12.34	Peak	H	28.20	4.85	-	45.39	74.00	28.61
4 804.000	5.69	Average	H	28.20	4.85	1.13	39.87	54.00	14.13
4 804.000	14.28	Peak	V	28.20	4.85	-	47.33	74.00	26.67
4 804.000	4.22	Average	V	28.20	4.85	1.13	38.40	54.00	15.60
Test Data for Middle Channel									
4 882.000	12.40	Peak	H	28.30	4.91	-	45.61	74.00	28.39
4 882.000	5.17	Average	H	28.30	4.91	1.13	39.51	54.00	14.49
4 882.000	15.01	Peak	V	28.30	4.91	-	48.22	74.00	25.78
4 882.000	4.37	Average	V	28.30	4.91	1.13	38.71	54.00	15.29
Test Data for High Channel									
4 960.000	13.59	Peak	H	28.60	5.04	-	47.23	74.00	26.77
4 960.000	4.20	Average	H	28.60	5.04	1.13	38.97	54.00	15.03
4 960.000	15.00	Peak	V	28.60	5.04	-	48.64	74.00	25.36
4 960.000	4.90	Average	V	28.60	5.04	1.13	39.67	54.00	14.33

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

12.6.2.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.000	13.09	Peak	H	28.20	4.85	-	46.14	74.00	27.86
4 804.000	5.13	Average	H	28.20	4.85	1.13	39.31	54.00	14.69
4 804.000	14.78	Peak	V	28.20	4.85	-	47.83	74.00	26.17
4 804.000	4.46	Average	V	28.20	4.85	1.13	38.64	54.00	15.36
Test Data for Middle Channel									
4 882.000	13.56	Peak	H	28.30	4.91	-	46.77	74.00	27.23
4 882.000	5.18	Average	H	28.30	4.91	1.13	39.52	54.00	14.48
4 882.000	15.24	Peak	V	28.30	4.91	-	48.45	74.00	25.55
4 882.000	4.62	Average	V	28.30	4.91	1.13	38.96	54.00	15.04
Test Data for High Channel									
4 960.000	12.79	Peak	H	28.60	5.04	-	46.43	74.00	27.57
4 960.000	4.21	Average	H	28.60	5.04	1.13	38.98	54.00	15.02
4 960.000	14.51	Peak	V	28.60	5.04	-	48.15	74.00	25.85
4 960.000	3.81	Average	V	28.60	5.04	1.13	38.58	54.00	15.42

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

12.6.2.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.01 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.000	13.70	Peak	H	28.20	4.85	-	46.75	74.00	27.25
4 804.000	5.57	Average	H	28.20	4.85	1.13	39.75	54.00	14.25
4 804.000	14.64	Peak	V	28.20	4.85	-	47.69	74.00	26.31
4 804.000	3.85	Average	V	28.20	4.85	1.13	38.03	54.00	15.97
Test Data for Middle Channel									
4 882.000	13.71	Peak	H	28.30	4.91	-	46.92	74.00	27.08
4 882.000	4.86	Average	H	28.30	4.91	1.13	39.20	54.00	14.80
4 882.000	14.96	Peak	V	28.30	4.91	-	48.17	74.00	25.83
4 882.000	4.33	Average	V	28.30	4.91	1.13	38.67	54.00	15.33
Test Data for High Channel									
4 960.000	13.31	Peak	H	28.60	5.04	-	46.95	74.00	27.05
4 960.000	4.74	Average	H	28.60	5.04	1.13	39.51	54.00	14.49
4 960.000	15.06	Peak	V	28.60	5.04	-	48.70	74.00	25.30
4 960.000	4.78	Average	V	28.60	5.04	1.13	39.55	54.00	14.45

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

13. RADIATED EMISSION TEST

13.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.


13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

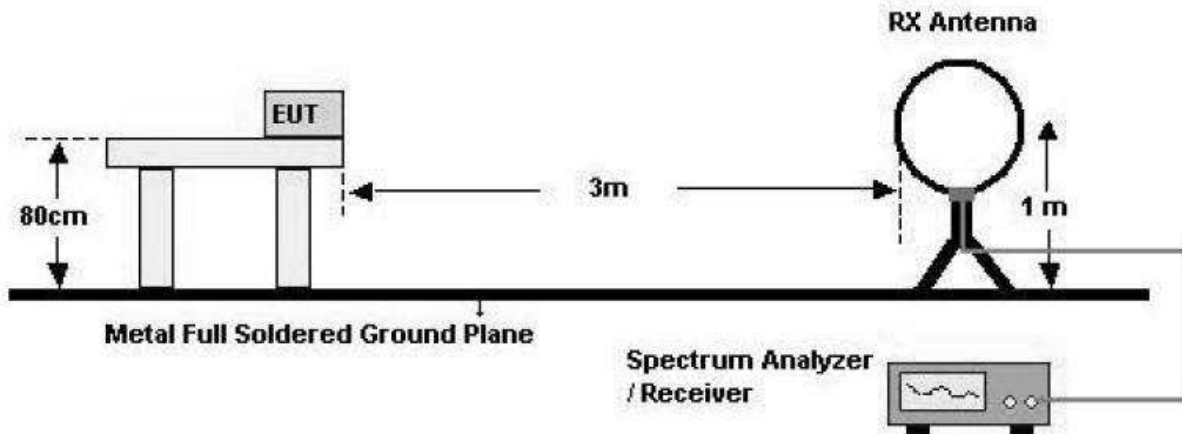

2. 30 MHz - 1 GHz

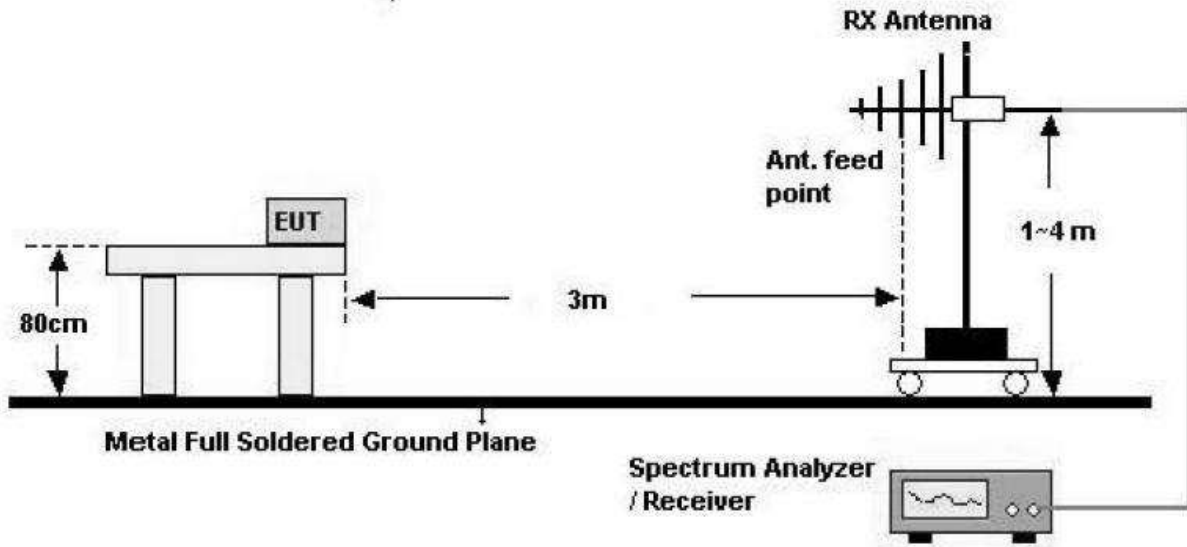

3. Above 1 GHz

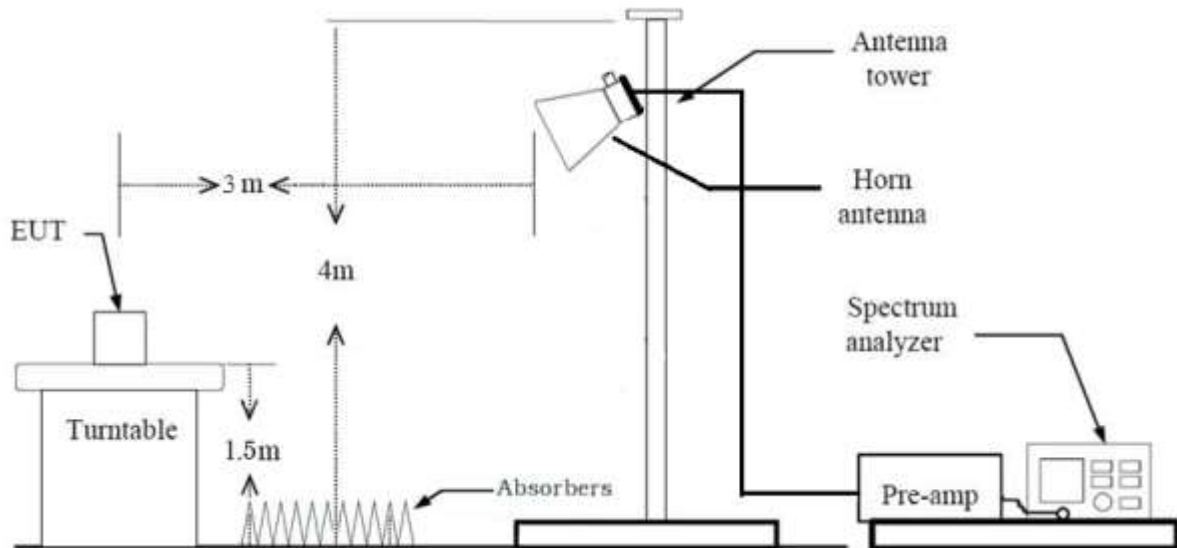


13.3 Test Date

September 07, 2020 ~ September 11, 2020

13.4 Test data for 30 MHz ~ 1 GHz

13.4.1 Test data for Bluetooth Mode

- . Resolution bandwidth : 120 kHz
- . Frequency range : 30 MHz ~ 1 000 MHz
- . Measurement distance : 3 m

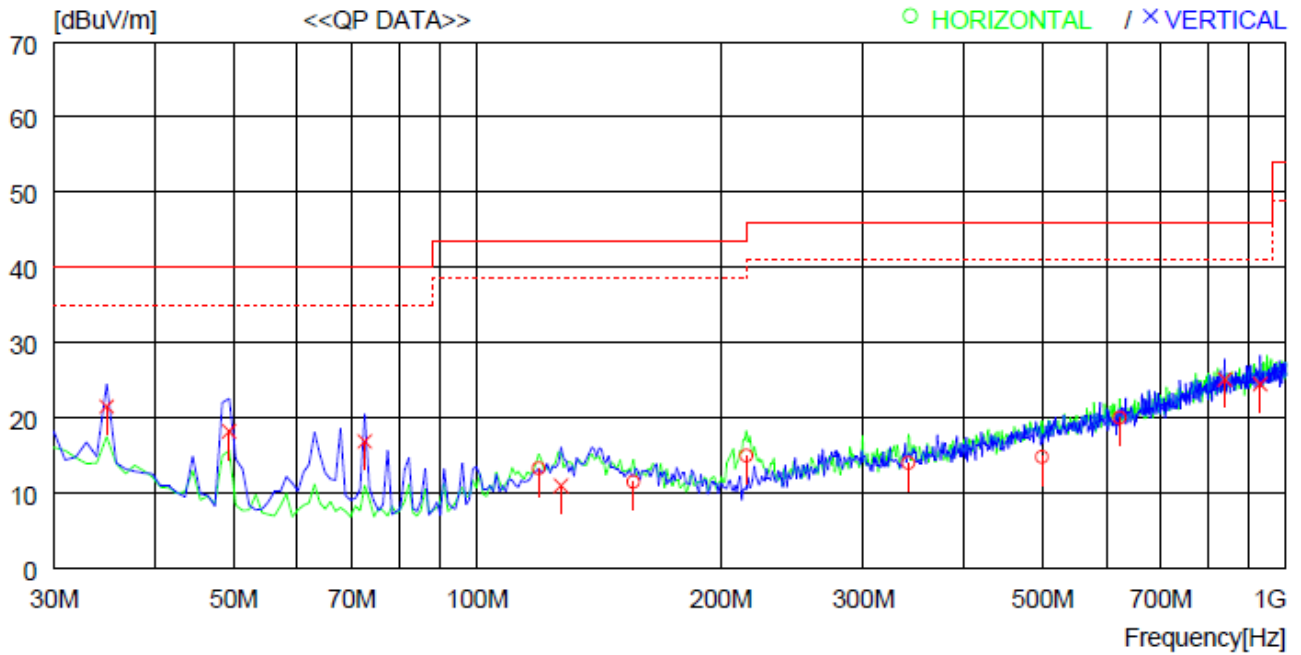

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	119.240	34.2	10.8	1.0	32.7	13.3	43.5	30.2	400	234
2	156.100	30.6	12.3	1.2	32.6	11.5	43.5	32.0	400	234
3	215.270	34.4	11.8	1.4	32.6	15.0	43.5	28.5	400	234
4	341.370	30.1	14.8	1.8	32.7	14.0	46.0	32.0	400	234
5	499.481	27.7	17.8	2.2	32.9	14.8	46.0	31.2	400	251
6	622.667	30.5	20.1	2.4	33.0	20.0	46.0	26.0	400	260
----- Vertical -----										
7	34.850	42.5	11.1	0.5	32.6	21.5	40.0	18.5	400	199
8	49.400	40.4	9.9	0.6	32.7	18.2	40.0	21.8	400	162
9	72.680	40.2	8.6	0.8	32.7	16.9	40.0	23.1	400	172
10	127.000	31.8	10.8	1.1	32.7	11.0	43.5	32.5	400	162
11	839.941	32.6	22.5	2.4	32.4	25.1	46.0	20.9	400	194
12	929.178	30.1	23.4	2.9	31.9	24.5	46.0	21.5	400	178

13.4.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz)


Humidity Level : 45 % R.H. Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : RF Module

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

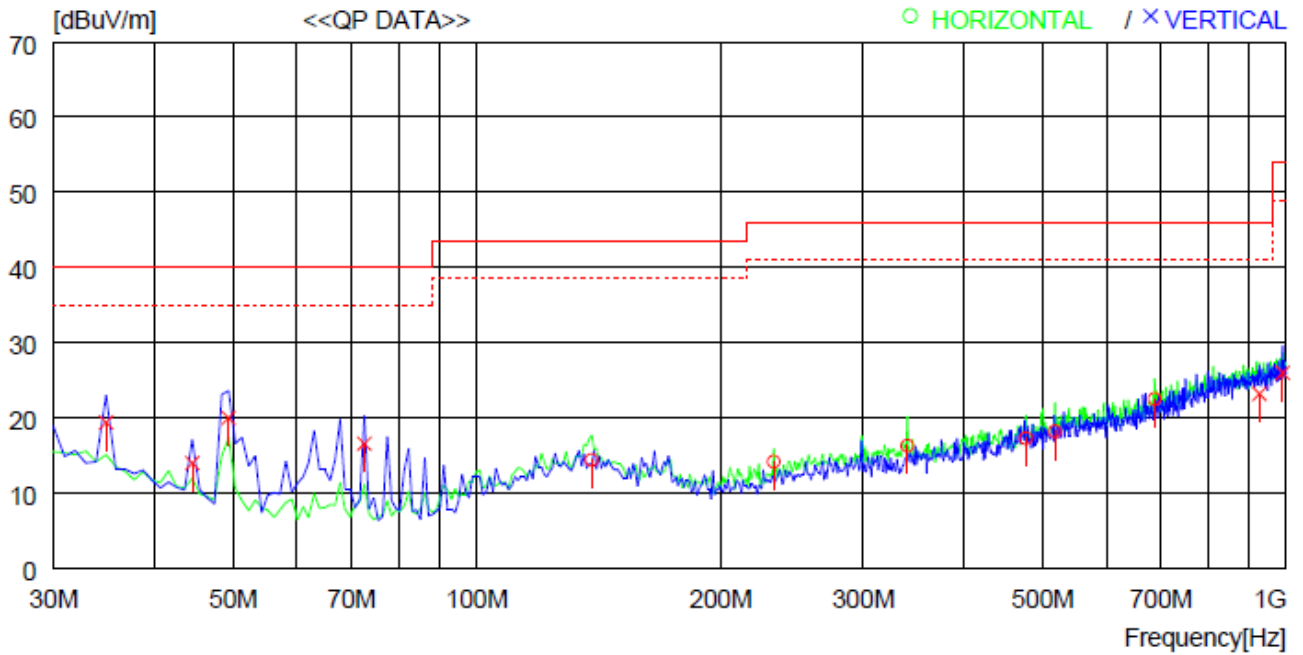

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	138.640	35.2	10.8	1.1	32.7	14.4	43.5	29.1	400	272
2	232.730	34.4	10.9	1.5	32.6	14.2	46.0	31.8	400	272
3	340.400	32.5	14.7	1.8	32.7	16.3	46.0	29.7	400	272
4	477.171	30.6	17.5	2.1	32.9	17.3	46.0	28.7	400	272
5	517.910	30.8	18.1	2.2	32.9	18.2	46.0	27.8	400	262
6	687.655	32.1	20.8	2.5	32.9	22.5	46.0	23.5	400	204
----- Vertical -----										
7	34.850	40.4	11.1	0.5	32.6	19.4	40.0	20.6	400	269
8	44.550	35.6	10.5	0.6	32.7	14.0	40.0	26.0	400	299
9	49.400	42.2	9.9	0.6	32.7	20.0	40.0	20.0	400	269
10	72.680	39.9	8.6	0.8	32.7	16.6	40.0	23.4	400	299
11	926.268	28.8	23.4	2.9	31.9	23.2	46.0	22.8	400	291
12	989.316	30.9	23.7	3.0	31.6	26.0	54.0	28.0	400	291

13.4.3 Test data for Intermodulation Mode(Bluetooth + WLAN 5 GHz)


Humidity Level : 45 % R.H. Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : RF Module

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

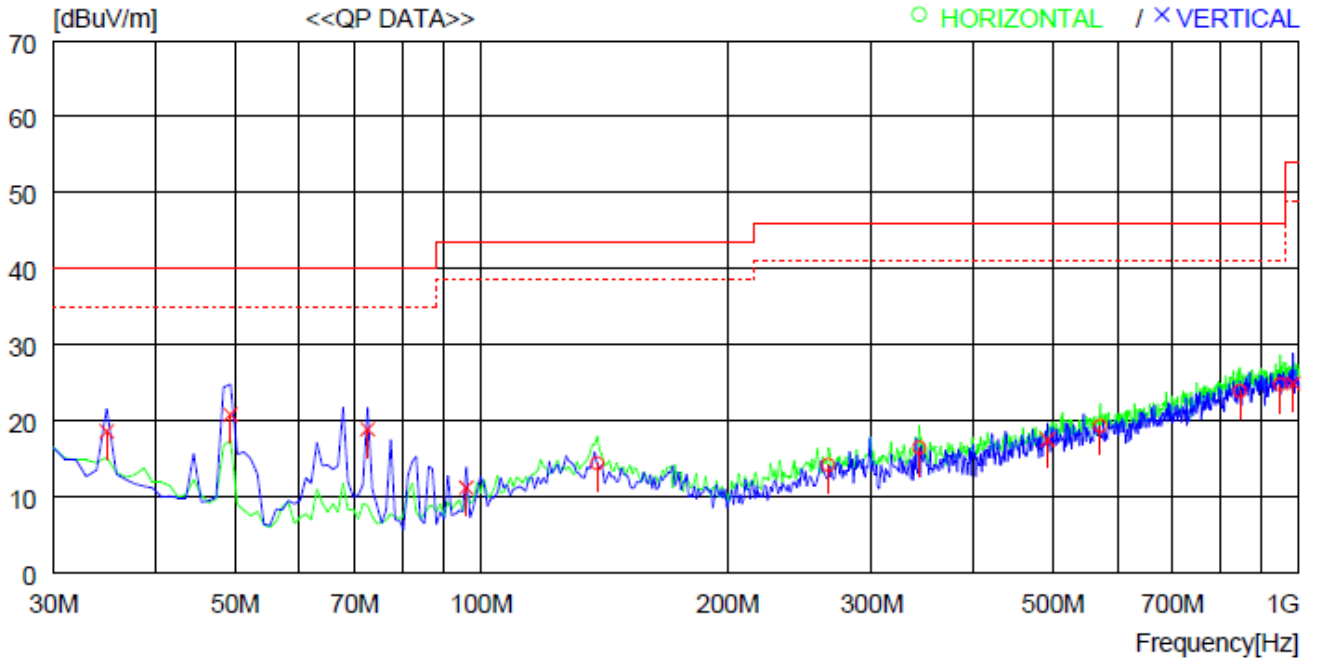

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	138.640	35.2	10.8	1.1	32.7	14.4	43.5	29.1	400	232
2	265.710	34.1	11.2	1.6	32.7	14.2	46.0	31.8	400	142
3	343.310	32.6	14.8	1.8	32.7	16.5	46.0	29.5	400	158
4	571.259	30.8	19.2	2.3	33.0	19.3	46.0	26.7	400	149
5	846.731	31.2	22.6	2.4	32.3	23.9	46.0	22.1	400	142
6	948.577	30.1	23.5	3.0	31.8	24.8	46.0	21.2	400	158
----- Vertical -----										
7	34.850	39.6	11.1	0.5	32.6	18.6	40.0	21.4	400	121
8	49.400	43.0	9.9	0.6	32.7	20.8	40.0	19.2	400	117
9	72.680	42.2	8.6	0.8	32.7	18.9	40.0	21.1	400	114
10	95.960	34.2	8.8	0.9	32.7	11.2	43.5	32.3	400	121
11	492.691	30.5	17.7	2.2	32.9	17.5	46.0	28.5	400	114
12	983.496	29.8	23.7	3.0	31.6	24.9	54.0	29.1	400	121

13.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

13.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

14. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	102177	Apr. 21, 2020 (1Y)
ESW	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 27, 2020 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 16, 2020 (1Y)
BBV 9718 B	Schwarzbeck	Broadband Preamplifier	00009	Mar. 16, 2020 (1Y)
SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Feb. 20, 2020 (1Y)
SCU18	Rohde & Schwarz	Signal Conditioning unit	102266	Jul. 15, 2020 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 08, 2020 (2Y)
BBHA 9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 23, 2020 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020(1Y)