

# ATC5CPC001 User Manual

## Description

- Model : ATC5CPC001
- WLAN : 802.11 a/b/g/n/ac
- Frequency Range : 2400MHz ~ 5845MHz


## Features

- Dimension : 22.5mm x 20.0mm x 2.9mm
- Temperature Range : -40°C ~ +85°C
- Supply Voltage : VBAT 3.2V to 3.6V
- Output Power
  - WLAN : 17.0dBm(11b 11Mbps), 16dBm(11g 54Mbps, 11n 2.4G MCS7), 15dBm(11a 54Mbps), 14dBm(11n 5G MCS7), 11dBm(11ac MCS9)
- Interface : PCIe(WLAN)

## Application

- Automotive (Outdoor Device)

## Dimensions

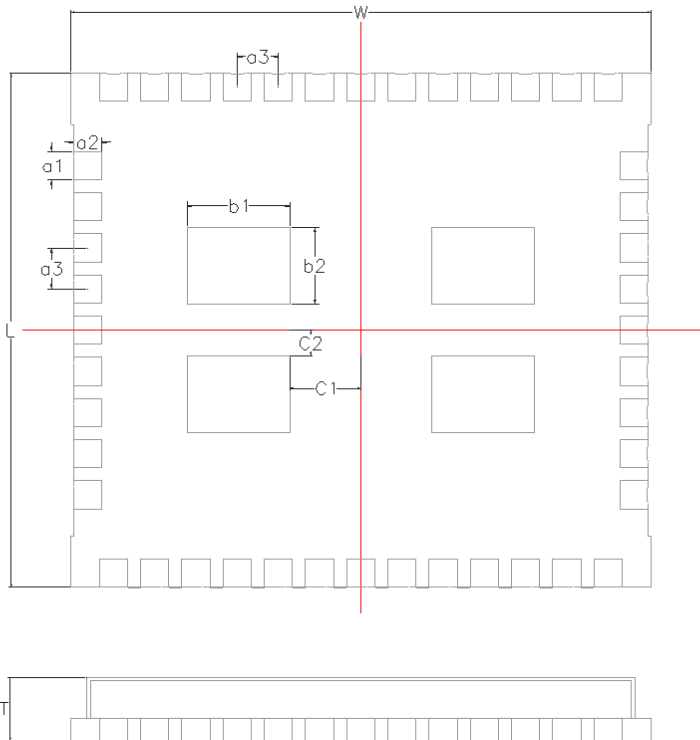

Mark	Dimension	Mark	Dimension	Mark	Dimension	Mark	Dimension	Mark	Dimension
W	22.5±0.2	L	20.0±0.2	a1	1.1±0.1	a2	1.1±0.1	a3	1.6±0.1
b1	4.0±0.1	b2	3.0±0.1	T	2.9 Max.	C	0.1 Max.	C1	2.75±0.1
C2	1.0±0.1								

Unit : mm

# ATC5CPC001 User Manual

## Operating condition

### 1) Recommended operation conditions


Parameter	Min.	Typ.	Max.	Unit
Operating Temperature Range	-40	-	+85	°C
Supply Voltage : VBATT (3.3V) <sup>1)</sup>	3.2	3.3	3.6	V
Supply Voltage : VIO	1.62	1.8	1.98	V
	2.97	3.3	3.63	V

### 2) Current consumption

Parameter	Average	Max.	Unit
Stand-by (BT & WLAN)	5	10	mA
WLAN Continuous Rx <sup>2)</sup>	280	360	V
WLAN Continuous Tx <sup>2)</sup>	790	1,000	V
Bluetooth Connection	35	40	V
Leakage current	15		uA

# ATC5CPC001 User Manual

## Boot up sequence

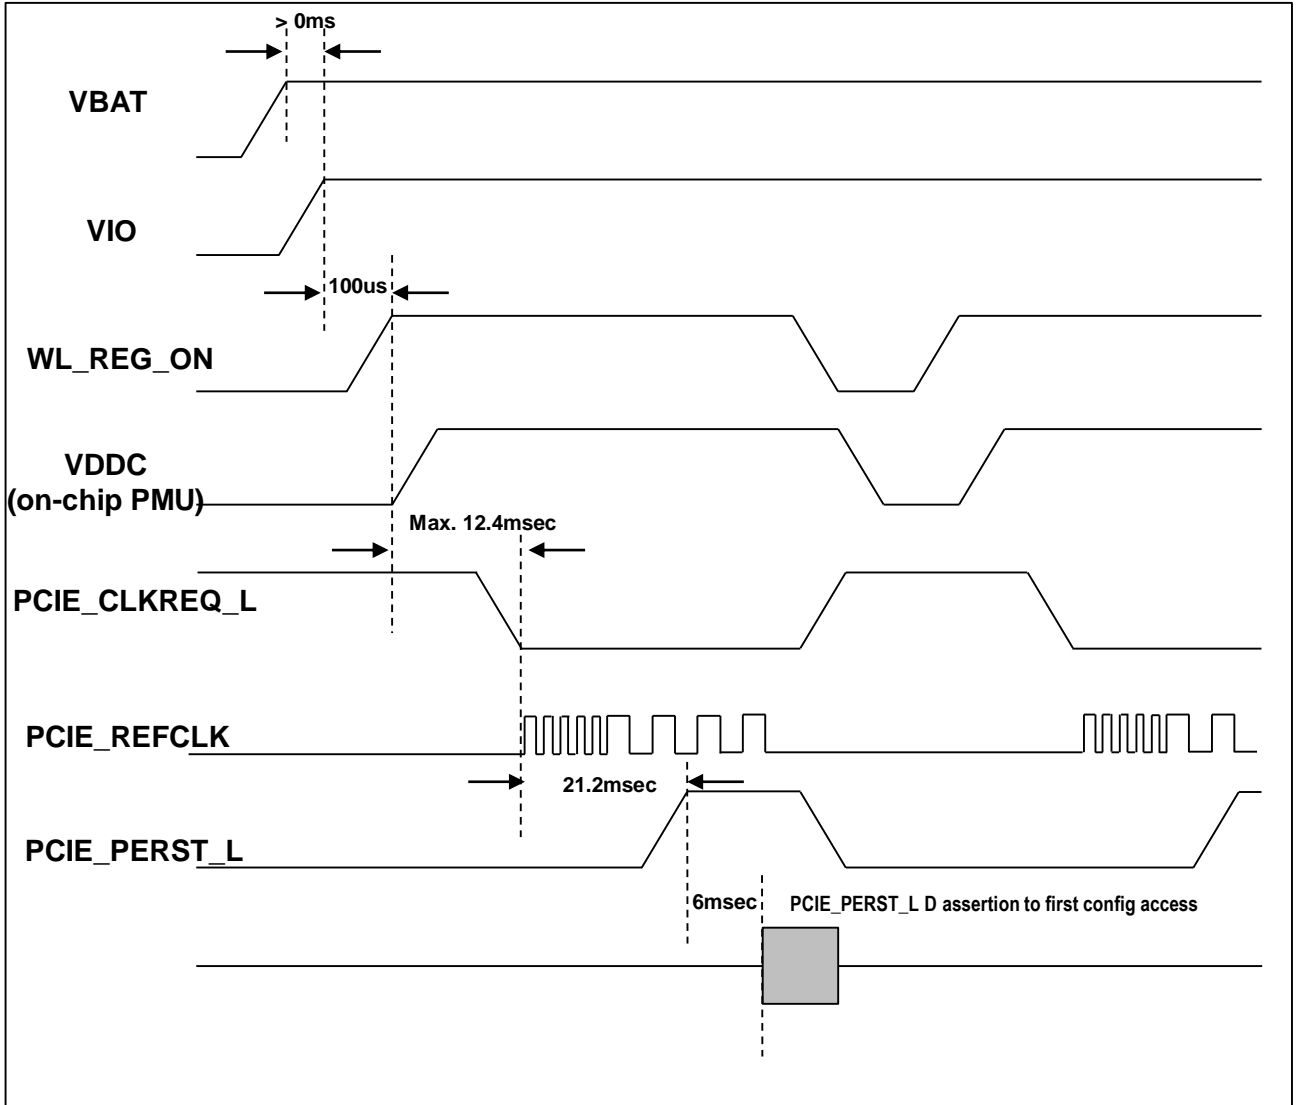

# ATC5CPC001 User Manual

---

## General Features

- Operation Voltage is 3.3V/1.8V Dual Power Rail
- Up to 866 Mbps data rate
- Support 2 Antenna port
  - : BT and WLAN ANT1, WLAN ANT2
- Integrated External RF Switch and Internal PA/LNA at 2.4GHz,  
Internal PA and External RF Switch and LNA at 5GHz
- RoHS Compliant
- Size : 22.5 x 20.0 x 2.9 mm<sup>3</sup>
- Support bandwidth : HT20 / HT40 / VHT80
- Interface : PCIe(WLAN), UART(BT), PCM/I2S
- Package type : SMD type(Side-via)

# ATC5CPC001 User Manual

---

## General Features

BT(v5.0) + 2.4GHz/5GHz WiFi 5 (802.11a/b/g/n/ac) 2x2 MIMO Module

Bluetooth(BT5.0 compliant)

### 1) Bluetooth Key Features

- Supports key features of upcoming Bluetooth standards
- Fully supports Bluetooth Core Specification version 4.2 + (Enhanced Data Rate) EDR features:
  - Adaptive Frequency Hopping (AFH)
  - Quality of Service (QoS)
  - Extended Synchronous Connections (eSCO) – Voice Connections
  - Fast Connect (interlaced page and inquiry scans)
  - Secure simple Pairing (SSP)
  - Sniff Sub rating (SSR)
  - Encryption Pause Resume (EPR)
  - Extended Inquiry Response (EIR)
  - Link Supervision Timeout (LST)
- UART baud rates up to 4 Mbps
- Supports all Bluetooth 4.2 packet types
- Supports maximum Bluetooth data rates over HCI UART
- Multipoint operation with up to seven active slaves
  - Maximum of seven simultaneous active ACL links
  - Maximum of three simultaneous active SCO and eSCO connections with scatternet support
- Narrowband and wideband packet loss concealment
- Scatternet operation with up to four active piconets with background scan and support for scatter mode
- High-speed HCI UART transport support with low-power out-of-band BT\_DEV WAKE and BT\_HOST\_WAKE signaling
  - Channel quality driven data rate and packet type selection
  - Standard Bluetooth test modes
  - Extended radio and production test mode features
  - Full support for power savings modes
    - Bluetooth clock request
    - Bluetooth standard sniff
    - Deep-sleep modes and software regulator shutdown

## General Features

### WLAN

#### 1) WLAN RF band & modulation Features

- Dual-band 2.4GHz and 5GHz WiFi 5 (802.11a/b/g/n/ac)
- Dual-stream up to 866Mbps data rate
- Supports 20, 40 and 80MHz channels with optional SGI(256 QAM modulation)
- Tx and Rx low-density parity check(LDPC)
- Supports IEEE 802.11ac/n beamforming
- Supports two antennas with one dedicated to Bluetooth and WLAN and one to WLAN.
- PCIe mode complies with PCI Express base specification revision 3.0 for x1 lane and power management running at Gen1 speeds
- WPA and WPA2(Personal) support for powerful encryption and authentication
- AES and TKIP in hardware for faster data encryption and IEEE 802.11i compatibility
- Reference WLAN subsystem provides Wi-Fi protected Setup(WPS)

#### 2) WLAN MAC features

- Enhanced MAC for supporting IEEE 802.11ac features
- Transmission and reception of aggregated MPDUs(A-MPDU) for high throughput(HT)
- Support for power management schemes, including WMM power-save multi-poll(PSMP) and multiphase PSMP operation
- Support for immediate ACK and block-ACK policies
- Inter-frame space timing support, including RIFS
- Back-off counters in hardware for supporting multiple priorities as specified in the WMM specification
- Timing synchronization function(TSF), network allocation vector(NAV) maintenance, and target beacon transmission time(TBTT) generation in hardware
- Hardware offload for AES-CCMP, legacy WPA TKIP, legacy WEP ciphers, WAPI, and support for key management
- Programmable independent basic service set(IBSS) or infrastructure basic service set functionality

## General Features


### WLAN

#### 3) WLAN PHY features

- Programmable data rates from MCS0-9 in 20MHz, 40MHz, and 80MHz channels, as specified in IEEE 802.11ac
- Improved performance with 2x2 channel smoothing and spur canceller support
- Supports Optional short GI and Green field modes in Tx and Rx
- Tx and Rx LDPC for improved range and power efficiency
- Beamforming support
- Supports IEEE 802.11h/k for worldwide operation
- Advanced algorithms for low power, enhanced sensitivity, range, and reliability
- IEEE 802.11a, 11b, 11g, 11n, 11ac single stream PHY standards
- Designed to meet FCC and other worldwide regulatory requirements

# ATC5CPC001 User Manual

## Pin Configuration

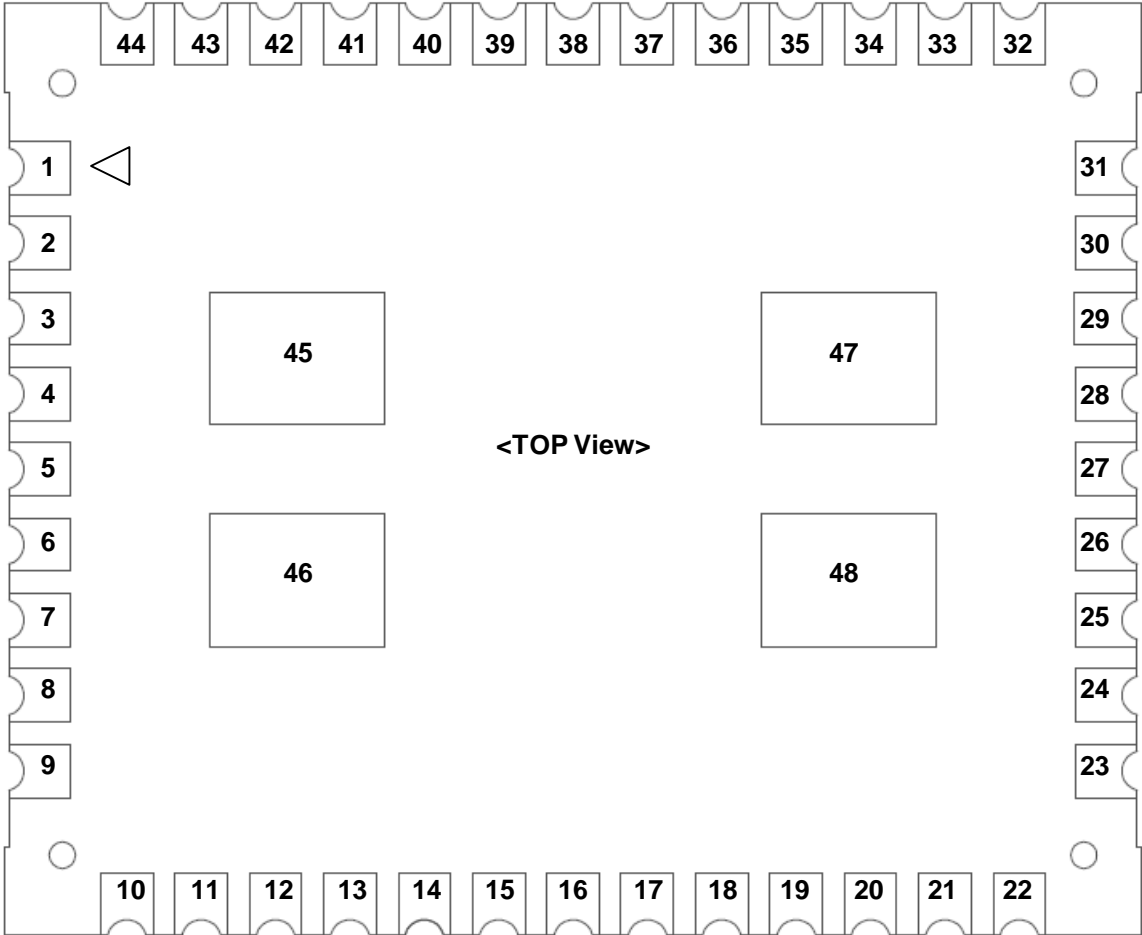



# ATC5CPC001 User Manual

## Pin Configuration

No.	Pin Name	I/O	Description
1	PCIE_CLK_P	I	PCIE differential clock input positive
2	PCIE_CLK_N	I	PCIE differential clock input negative
3	PCIE_TD_N	O	PCIE Transmitter differential negative
4	PCIE_TD_P	O	PCIE Transmitter differential positive
5	N.C.	-	Not Connected (Reserved)
6	N.C.	-	Not Connected (Reserved)
7	N.C.	-	Not Connected (Reserved)
8	N.C.	-	Not Connected (Reserved)
9	N.C.	-	Not Connected (Reserved)
10	N.C.	-	Not Connected (Reserved)
11	BT_DEV_WAKE	I	Bluetooth device wake from host
12	BT_HOST_WAKE	O	Bluetooth host wake from device
13	VBAT	I	Positive supply - Supply voltage : Typical 3.3V.
14	VBAT	I	Positive supply - Supply voltage : Typical 3.3V.
15	GND	-	Ground
16	N.C.	-	Not Connected (Reserved)
17	WL_REG_ON	I	WLAN Power on reset(Power rail : VDDIO) - Internal 200KΩ pull-down
18	BT_REG_ON	I	Bluetooth Power on reset(Power rail : VDDIO) - Internal 200KΩ pull-down

# ATC5CPC001 User Manual

## Pin Configuration

No.	Pin Name	I/O	Description
19	BT_PCM_CLK	I/O	PCM clock, can be master (output) or slave (input)
20	BT_PCM_SYNC	I/O	PCM sync signal, can be master (output) or slave (input)
21	BT_PCM_IN	I/O	PCM data input
22	BT_PCM_OUT	I/O	PCM data output
23	WL_ANT 1	RF	BT/WLAN RF ANT 1
24	GND	-	Ground
25	LPO	I	Low power clock input(32.768KHz, 0V ~ 1.8V peak to peak)
26	GND	-	Ground
27	WL_DEV_WAKE	I	WLAN device wake from host
28	WL_HOST_WAKE	O	WLAN host wake from device
29	GND	-	Ground
30	GND	-	Ground
31	WL_ANT 2	RF	WLAN RF ANT 2
32	SDIO_PAD	I	SDIO_PADVDDIO :If VIO_SD=1.8V→high, If VIO_SD=3.3V→low
33	BT_UART_RTS_N	I/O	Bluetooth UART request to send
34	BT_UART_CTS_N	I/O	Bluetooth UART clear to send
35	BT_UART_RXD	I/O	Bluetooth UART signal input
36	BT_UART_TXD	I/O	Bluetooth UART signal output

# ATC5CPC001 User Manual

## Pin Configuration

No.	Pin Name	I/O	Description
37	VIO	I	BT, WLAN VDDIO supply voltage.(3.3V or 1.8V) - BT and WLAN should be same power rail
38	SDIO_DIS	I	SDIO_DIABLE : Low : SDIO Enabled, High : SDIO Disabled
39	PCIE_EN	I	PCIE_ENABLE : Low : PCIE Disabled, High : PCIE Enabled
40	PCIE_PME_L	O	PCIE power management event output
41	PCIE_PERST_N	I	PCIE system reset.
42	PCIE_CLKREQ	O	PCIE clock request signal
43	PCIE_RD_P	I	PCIE Receiver differential positive
44	PCIE_RD_N	I	PCIE Receiver differential negative
45	GND	-	Ground
46	GND	-	Ground
47	GND	-	Ground
48	GND	-	Ground

## **FCC MODULAR APPROVAL INFORMATION EXAMPLES for Manual**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**CAUTION:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **FCC Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

## **OEM INTEGRATION INSTRUCTIONS:**

This device is intended only for OEM integrators under the following conditions:

The module must be installed in the host equipment such that 20 cm is maintained between the antenna and users, and the transmitter module may not be co-located with any other transmitter or antenna. The module shall be only used with the internal on-board antenna that has been originally tested and certified with this module. External antennas are not supported. As long as these 3 conditions above are met, further transmitter test will not be required.

However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.). The end-product may need Verification testing, Declaration of Conformity testing, a Permissive Class II Change or new Certification. Please involve a FCC certification specialist in order to determine what will be exactly applicable for the end-product.

### **Validity of using the module certification:**

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization. In such cases, please involve a FCC certification specialist in order to determine if a Permissive Class II Change or new Certification is required.

### **Upgrade Firmware:**

The software provided for firmware upgrade will not be capable to affect any RF parameters as certified for the FCC for this module, in order to prevent compliance issues.

### **End product labeling:**

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID: YZP-ATC5CPC001".

### **Information that must be placed in the end user manual:**

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

## **FCC MODULAR APPROVAL INFORMATION EXAMPLES for Manual**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**CAUTION:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## **WARNING**

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

“CAUTION : Exposure to Radio Frequency Radiation.

Antenna shall be mounted in such a manner to minimize the potential for human contact during normal operation. The antenna should not be contacted during operation to avoid the possibility of exceeding the FCC radio frequency exposure limit.

## IC Information

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

*Cet appareil est conforme avec Industrie Canada exempts de licence standard RSS (s). L'opération est soumise aux deux conditions suivantes:*

- (1) cet appareil ne peut causer d'interférences, et*
- (2) cet appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement de l'appareil.*

The end product must be labeled to display the Industry Canada certification number of the module.

Contains transmitter module IC: 7414C-ATC5CPC001

*Le dispositif d'accueil doivent être étiquetés pour afficher le numéro de certification d'Industrie Canada du module.  
Contient module émetteur IC: 7414C-ATC5CPC001*

**\* This device is going to be operated in 5 150 MHz ~ 5 250 MHz frequency range, it is restricted in indoor environment only.**

## Information for OEM Integrator

This device is intended only for OEM integrators under the following conditions:

- 1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and
- 2) The transmitter module may not be co-located with any other transmitter or antenna.

End product labelling

The label for end product must include

“Contains FCC ID: YZP-ATC5CPC001, Contains IC: 7414C-ATC5CPC001”.

“CAUTION: Exposure to Radio Frequency Radiation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20cm between the radiator and your body. This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users.”

## Requirement per KDB996369 D03

### 2.2 List of applicable FCC rules

List the FCC rules that are applicable to the modular transmitter. These are the rules that specifically establish the bands of operation, the power, spurious emissions, and operating fundamental frequencies. DO NOT list compliance to unintentional-radiator rules (Part 15 Subpart B) since that is not a condition of a module grant that is extended to a host manufacturer. See also Section 2.10 below concerning the need to notify host manufacturers that further testing is required.<sup>3</sup>

**Explanation:** This module meets the requirements of FCC part 15C(15.247). part 15E(15.407)

### 2.3 Summarize the specific operational use conditions

Describe use conditions that are applicable to the modular transmitter, including for example any limits on antennas, etc. For example, if point-to-point antennas are used that require reduction in power or compensation for cable loss, then this information must be in the instructions. If the use condition limitations extend to professional users, then instructions must state that this information also extends to the host manufacturer's instruction manual. In addition, certain information may also be needed, such as peak gain per frequency band and minimum gain, specifically for master devices in 5 GHz DFS bands.

**Explanation:** The EUT has a Chip Antenna, and the antenna use a permanently attached antenna which is not replaceable.

### 2.4 Limited module procedures

If a modular transmitter is approved as a "limited module," then the module manufacturer is responsible for approving the host environment that the limited module is used with. The manufacturer of a limited module must describe, both in the filing and in the installation instructions, the alternative means that the limited module manufacturer uses to verify that the host meets the necessary requirements to satisfy the module limiting conditions.

A limited module manufacturer has the flexibility to define its alternative method to address the conditions that limit the initial approval, such as: shielding, minimum signaling amplitude, buffered modulation/data inputs, or power supply regulation. The alternative method could include that the limited module manufacturer reviews detailed test data or host designs prior to giving the host manufacturer approval.

This limited module procedure is also applicable for RF exposure evaluation when it is necessary to demonstrate compliance in a specific host. The module manufacturer must state how control of the product into which the modular transmitter will be installed will be maintained such that full compliance of the product is always ensured. For additional hosts other than the specific host originally granted with a limited module, a Class II permissive change is required on the module grant to register the additional host as a specific host also approved with the module.

**Explanation:** The module is not a limited module.



## 2.5 Trace antenna designs

For a modular transmitter with trace antenna designs, see the guidance in Question 11 of KDB Publication 996369 D02 FAQ – Modules for Micro-Strip Antennas and traces. The integration information shall include for the TCB review the integration instructions for the following aspects:

layout of trace design, parts list (BOM), antenna, connectors, and isolation requirements.

- a) Information that includes permitted variances (e.g., trace boundary limits, thickness, length, width, shape(s), dielectric constant, and impedance as applicable for each type of antenna);
- b) Each design shall be considered a different type (e.g., antenna length in multiple(s) of frequency, the wavelength, and antenna shape (traces in phase) can affect antenna gain and must be considered);
- c) The parameters shall be provided in a manner permitting host manufacturers to design the printed circuit (PC) board layout;
- d) Appropriate parts by manufacturer and specifications;
- e) Test procedures for design verification; and
- f) Production test procedures for ensuring compliance.

The module grantee shall provide a notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, require that the host product manufacturer must notify the module grantee that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the grantee, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

**Explanation:** Yes, The module with trace antenna designs, and This manual has been shown the layout of trace design, antenna, connectors, and isolation requirements.

## 2.6 RF exposure considerations

It is essential for module grantees to clearly and explicitly state the RF exposure conditions that permit a host product manufacturer to use the module. Two types of instructions are required for RF exposure information: (1) to the host product manufacturer, to define the application conditions (mobile, portable – xx cm from a person's body); and (2) additional text needed for the host product manufacturer to provide to end users in their end-product manuals. If RF exposure statements and use conditions are not provided, then the host product manufacturer is required to take responsibility of the module through a change in FCC ID (new application).

**Explanation:** This module complies with FCC RF radiation exposure limits set forth for an uncontrolled environment, This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body." This module is designed to comply with the FCC statement, FCC ID is: YZP-ATC5CPC001.

## 2.7 Antennas

A list of antennas included in the application for certification must be provided in the instructions. For modular transmitters approved as limited modules, all applicable professional installer instructions must be included as part of the information to the host product manufacturer. The antenna list shall also identify the antenna types (monopole, PIFA, dipole, etc. (note that for example an “omni-directional antenna” is not considered to be a specific “antenna type”)).

For situations where the host product manufacturer is responsible for an external connector, for example with an RF pin and antenna trace design, the integration instructions shall inform the installer that unique antenna connector must be used on the Part 15 authorized transmitters used in the host product. The module manufacturers shall provide a list of acceptable unique connectors.

**Explanation:** The EUT has a PCB Antenna, and the antenna use a permanently attached antenna which is unique.

## 2.8 Label and compliance information

Grantees are responsible for the continued compliance of their modules to the FCC rules. This includes advising host product manufacturers that they need to provide a physical or e-label stating “Contains FCC ID” with their finished product. See Guidelines for Labeling and User Information for RF Devices – KDB Publication 784748.

**Explanation:** The host system using this module, should have label in a visible area indicated the following texts: “Contains FCC ID: YZP-ATC5CPC001, Contains IC: 7414C-ATC5CPC001”

## 2.9 Information on test modes and additional testing requirements

Additional guidance for testing host products is given in KDB Publication 996369 D04 Module Integration Guide. Test modes should take into consideration different operational conditions for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.

The grantee should provide information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host.

Grantees can increase the utility of their modular transmitters by providing special means, modes, or instructions that simulates or characterizes a connection by enabling a transmitter. This can greatly simplify a host manufacturer’s determination that a module as installed in a host complies with FCC requirements.

**Explanation:** Top band can increase the utility of our modular transmitters by providing instructions that simulates or characterizes a connection by enabling a transmitter.

## **2.10 Additional testing, Part 15 Subpart B disclaimer**

The grantee should include a statement that the modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

**Explanation:** The module without unintentional-radiator digital circuitry, so the module does not require an evaluation by FCC Part 15 Subpart B. The host should be evaluated by the FCC Subpart B.