

# TEST REPORT

FCC/ISED BT LE Test for ETGBBTBP01  
Certification

**APPLICANT**  
LG Innotek Co., Ltd.

**REPORT NO.**  
HCT-RF-2012-FI001

**DATE OF ISSUE**  
December 7, 2020

**Tested by**  
Jeong Ho Kim



**Technical Manager**  
Kwon Jeong



HCT CO., LTD.

*Soo Chan Lee*

SooChan Lee / CEO

**HCT CO., LTD.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

**TEST  
REPORT**

FCC/ISED BT LE  
Test for  
ETGBBTBP01

**REPORT NO.**

HCT-RF-2012-FI001

**DATE OF ISSUE**

December 07, 2020

**Additional Model**

-

**Applicant**

**LG Innotek Co., Ltd.**

E1/E3, 30, Magokjungang 10-ro, Gangseo-gu, Seoul, 07796, Korea

**Eut Type  
Model Name**

Blue Adapter  
ETGBBTBP01

**FCC ID  
IC**

YZP-ETGBBTBP01  
7414C-ETGBBTBP01

**Max. RF Output Power**

-0.926 dBm (0.81 mW)

**Modulation type**

GFSK

**FCC Classification**

Digital Transmission System(DTS)

**FCC Rule Part(s)**

Part 15.247

**ISED Rule Part(s)**

RSS-247 Issue 2 (February 2017)  
RSS-Gen Issue 5\_Amendment 1 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 07, 2020	Initial Release

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	28
9. TEST RESULT	30
9.1 DUTY CYCLE	30
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	32
9.3 OUTPUT POWER	42
9.4 POWER SPECTRAL DENSITY	43
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	48
9.6 RADIATED SPURIOUS EMISSIONS	65
9.7 RADIATED RESTRICTED BAND EDGES	71
9.8 RECEIVER SPURIOUS EMISSIONS	76
9.9 POWERLINE CONDUCTED EMISSIONS	77
10. LIST OF TEST EQUIPMENT	81
11. ANNEX A_ TEST SETUP PHOTO	83

## 1. EUT DESCRIPTION

Model	ETGBBTBP01	
Additional Model	-	
EUT Type	Blue Adapter	
Power Supply	DC 5V	
Frequency Range	2402 MHz - 2480 MHz	
Max. RF Output Power	Peak	1M 37Bit/s : -1.090 dBm (0.78 mW) 1M 255Bit/s : -0.926 dBm (0.81 mW)
	Average	1M 37Bit/s : -1.25 dBm (0.75 mW) 1M 255Bit/s : -1.16 dBm (0.77 mW)
Modulation Type	GFSK	
Bluetooth Version	4.2	
Number of Channels	40 Channels	
Antenna type	PCB Antenna	
Antenna Peak Gain	1.5 dBi	
Date(s) of Tests	November 19, 2020 ~ December 02, 2020	
PMN (Product Marketing Number)	Blue Adapter	
HVIN (Hardware Version Identification Number)	ETGBBTBP01	
FVIN (Firmware Version Identification Number)	31A	
HMN (Host Marketing Name)	N/A	

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### 4. FACILITIES AND ACCREDITATIONS

#### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

#### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203 / RSS-Gen(Issue 5) Section 8:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05



## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

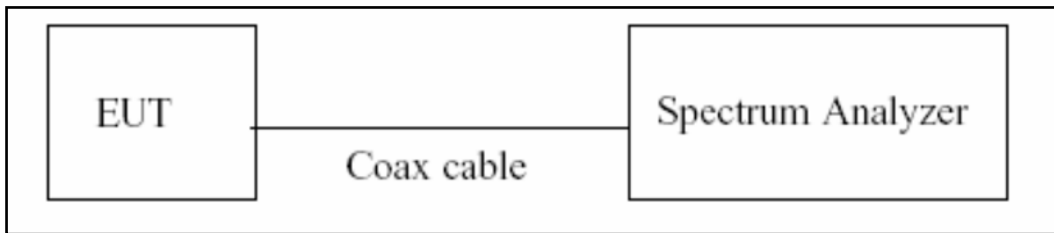

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/Duty\ Cycle)$

## 7.2. 6dB Bandwidth & 99 % Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

### Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW  $\approx 3 \times$  RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3 kHz BW.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = Peak
- 7) Trace mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 20 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq$  2 x Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	10.09
100	10.12
200	10.17
300	10.22
400	10.25
500	10.26
600	10.26
700	10.28
800	10.29
900	10.31
1000	10.32
2000	10.46
2400	10.50
2480	10.52
2500	10.52
3000	10.57
4000	10.65
5000	10.76
6000	10.76
7000	10.78
8000	10.78
9000	10.85
10000	10.90
11000	10.96
12000	11.02
13000	11.07
14000	11.15
15000	11.24
16000	11.21
17000	11.26
18000	11.27
19000	11.30
20000	11.35
21000	11.37
22000	11.41
23000	11.53
24000	11.60
25000	11.60
26000	11.64

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(10dB) + Cable loss

### 7.6. Radiated Test

#### FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

#### ISED


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

#### FCC&ISED


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Test Configuration

Below 30 MHz

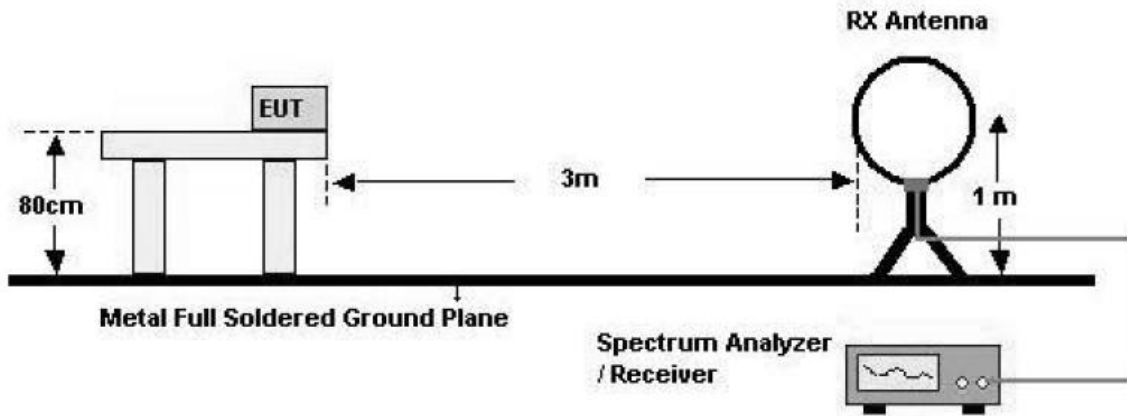


30 MHz - 1 GHz

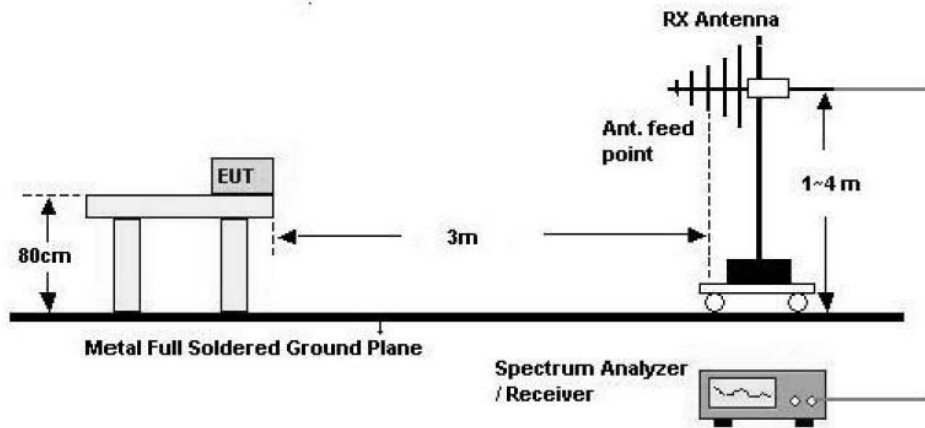



Above 1 GHz

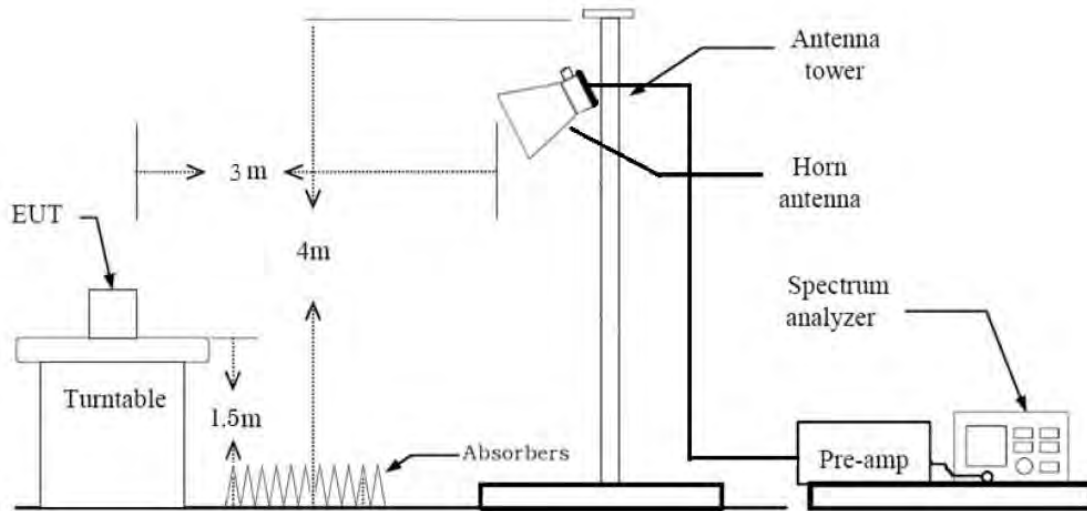

#### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered

that's already beyond the background noise floor.

#### **KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

#### **Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

#### 6. Spectrum Setting

##### (1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

##### (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with DC Power supply.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Max hold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
    - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total (Measurement Type : Peak)

= Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance

Factor(D.F)

Total (Measurement Type : Average)

= Average Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

+ Distance Factor(D.F) + Duty Cycle Factor

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with DC Power supply.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had

the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak)

= Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average) = Average Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

### 7.8. Receiver Spurious Emissions

#### Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

#### Test Configuration

30 MHz - 1 GHz

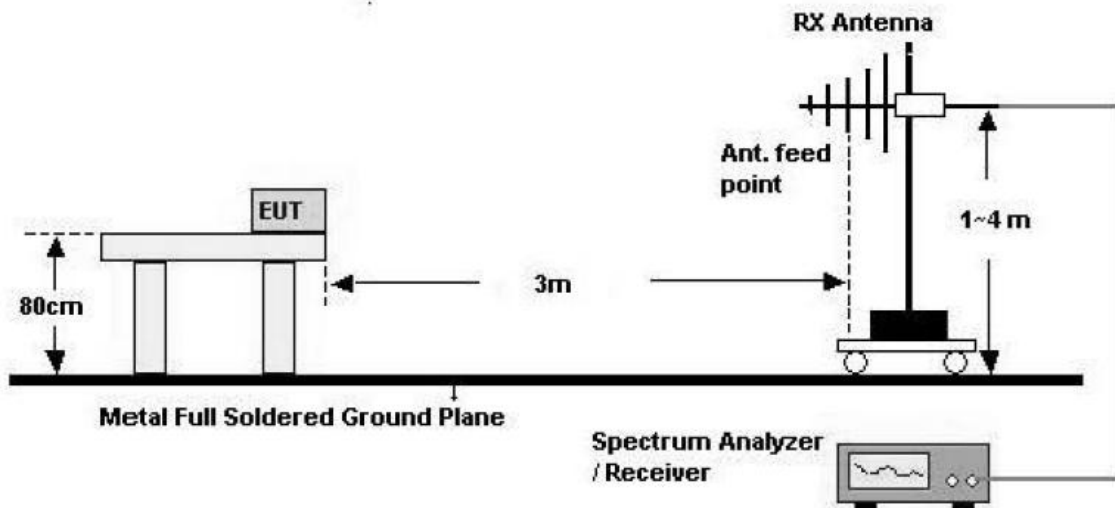


### Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)



Above 1 GHz

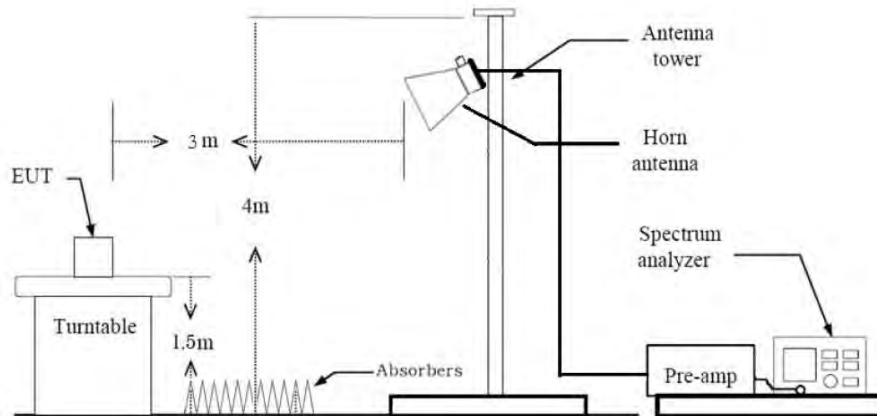

#### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with DC Power supply.
8. Spectrum Setting

##### (1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

##### (2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Average

- Trace = RMS
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log$  (test distance / specific distance) (dB)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## 7.9. Worst case configuration and mode

Radiated & Conducted Worst case Voltage 5[V]

### Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone
  - Worstcase : Stand alone
2. EUT Axis:
  - Radiated Spurious Emissions : X
  - Radiated Restricted Band Edge : Y
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.  
(Worst case : 1M 37Bytes)
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + Notebook
  - Worstcase : Stand alone + Notebook

### Conducted test

1. The EUT was configured with packet length of highest power.  
(Worst case : 1M 255Bytes)

## 8. SUMMARY TEST OF RESULTS

### FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	NA		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.4	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	RSS-GEN section 8.9 table 5, 6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	RSS-GEN section 8.10 table 7		PASS


## 9. TEST RESULT

### 9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.4079	0.6245	0.6532	1.85
1M	255	2.1500	2.5000	0.8600	0.66

1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

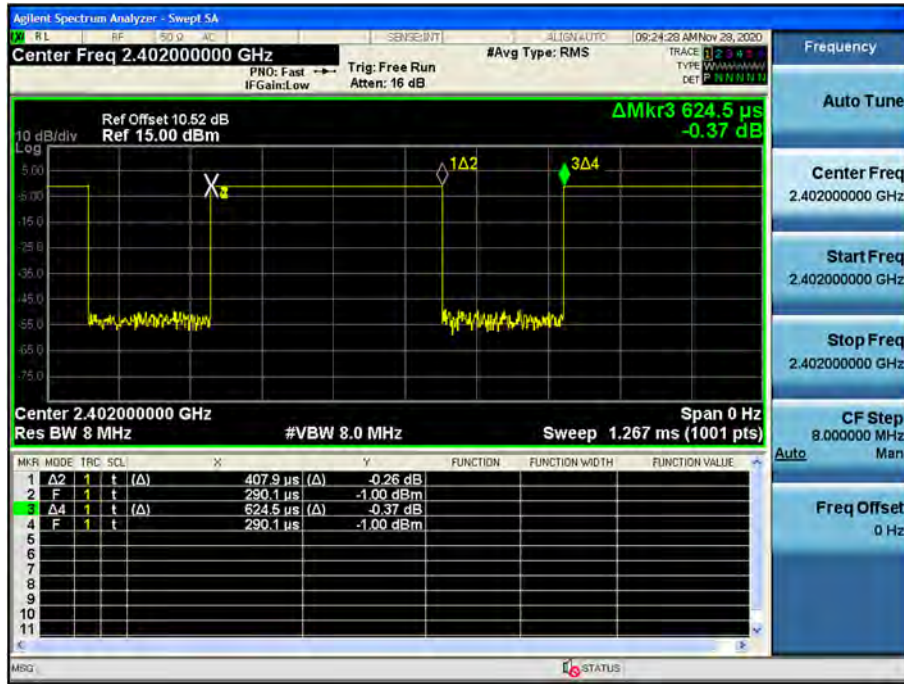

1M Bit/s (225 Byte) Test Plots

Duty Cycle (Low-CH 0)



## 9.2 6dB BANDWIDTH & 99 % BANDWIDTH

### FCC(6dB BANDWIDTH)

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 37byte	0	699.6	> 500
	19	699.9	
	39	695.7	

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 225byte	0	682.7	> 500
	19	704.6	
	39	704.0	



1M Bit/s (37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)




6 dB Bandwidth plot (High-CH 39)



▣ 1M Bit/s (255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

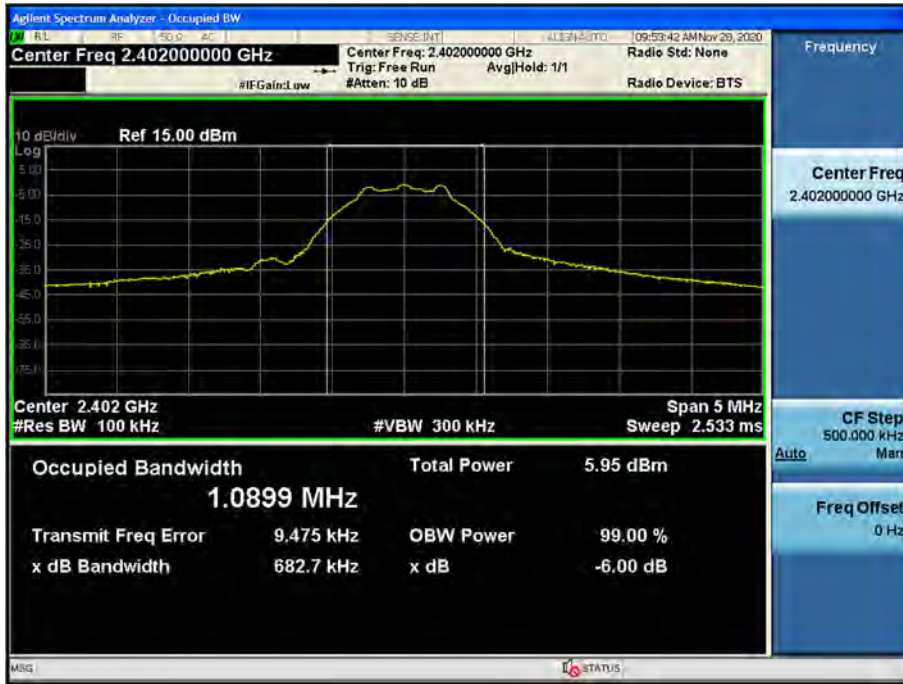

6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



**ISED (99 % BANDWIDTH)**

Mode (Bit/s)	Packet length (Byte)	Channel	99 % Bandwidth (kHz)
1M 37byte	37	0	1058.5
		19	1060.0
		39	1058.6

Mode (Bit/s)	Packet length (Byte)	Channel	99 % Bandwidth (kHz)
1M 225byte	37	0	1043.1
		19	1054.4
		39	1050.4

▣ 1M Bit/s (37 Byte) Test Plots


99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)

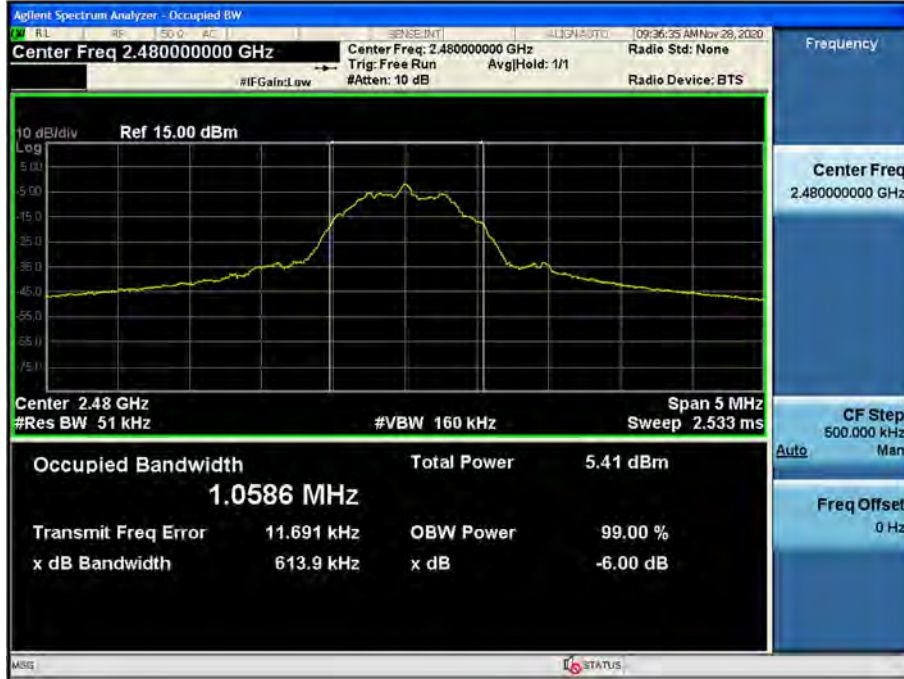

1M Bit/s (225 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)





99 % Bandwidth plot (High-CH 39)



### 9.3 OUTPUT POWER

#### Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
1M	37	2402	0	-1.090	30
		2440	19	-1.551	
		2480	39	-1.884	
	255	2402	0	-0.926	
		2440	19	-1.389	
		2480	39	-1.856	

#### Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
1M	37	2402	0	-3.10	1.85	-1.25	30
		2440	19	-3.61	1.85	-1.76	
		2480	39	-4.07	1.85	-2.22	
	255	2402	0	-1.81	0.66	-1.16	
		2440	19	-2.30	0.66	-1.64	
		2480	39	-2.88	0.66	-2.22	

#### Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 10.52 dB is offset for 2.4 GHz Band.

### 9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode (Bit/s)	Test Result	
			Measured Power(dBm)	Limit (dBm)
2402	0	1M 37 Byte	-15.733	8
2440	19		-16.080	
2480	39		-16.622	
2402	0	1M 225 Byte	-15.168	
2440	19		-15.818	
2480	39		-16.510	

**Note :**

1. Spectrum reading values are not plot data.  
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 10.52 dB is offset for 2.4 GHz Band.
4. The plot included is the worst mode(125k Bit/s (37 Byte)) of peak output power.

1M Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



Power Spectral Density (High-CH 39)



▣ 1M Bit/s (255 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)





Power Spectral Density (High-CH 39)



## 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.



▣ 1M Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0



High-CH 39



1M Bit/s (255 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39



☐ 1M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 0)

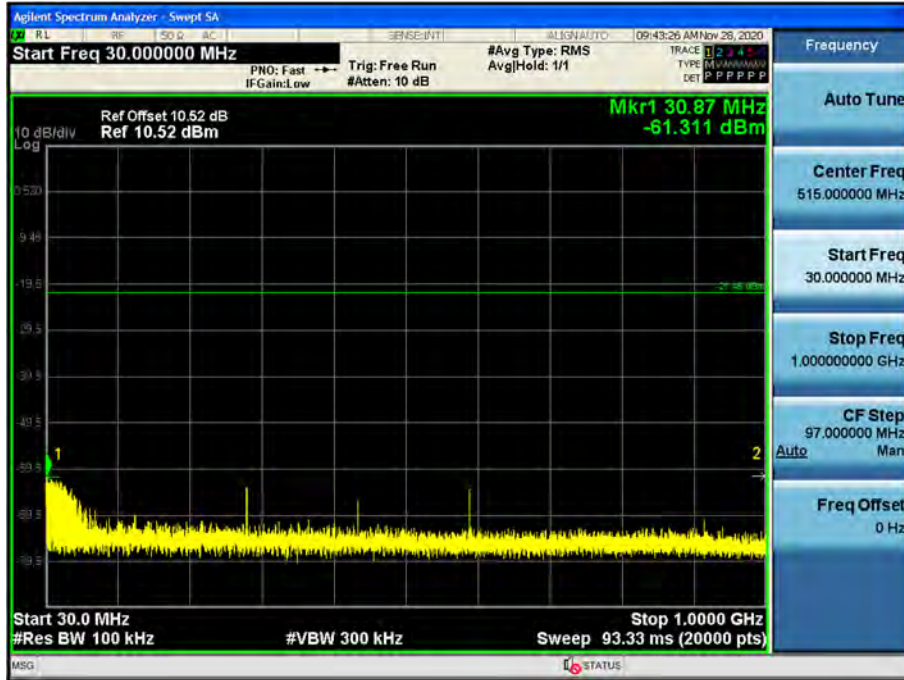


1 GHz ~ 3 GHz

Conducted Spurious Emission (Low-CH 0)

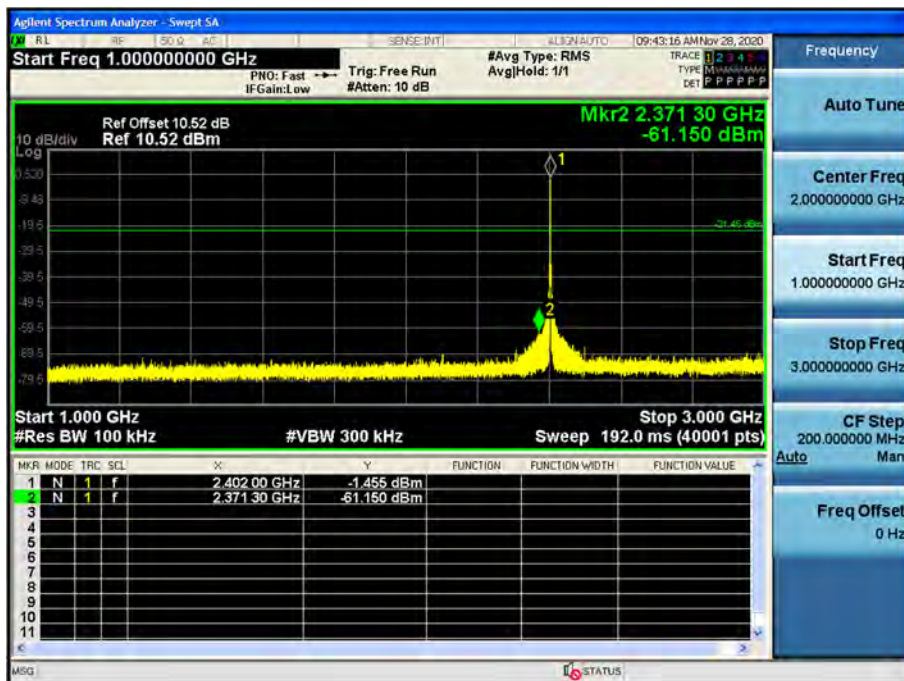


3 GHz ~ 5 GHz

Conducted Spurious Emission (Low-CH 0)

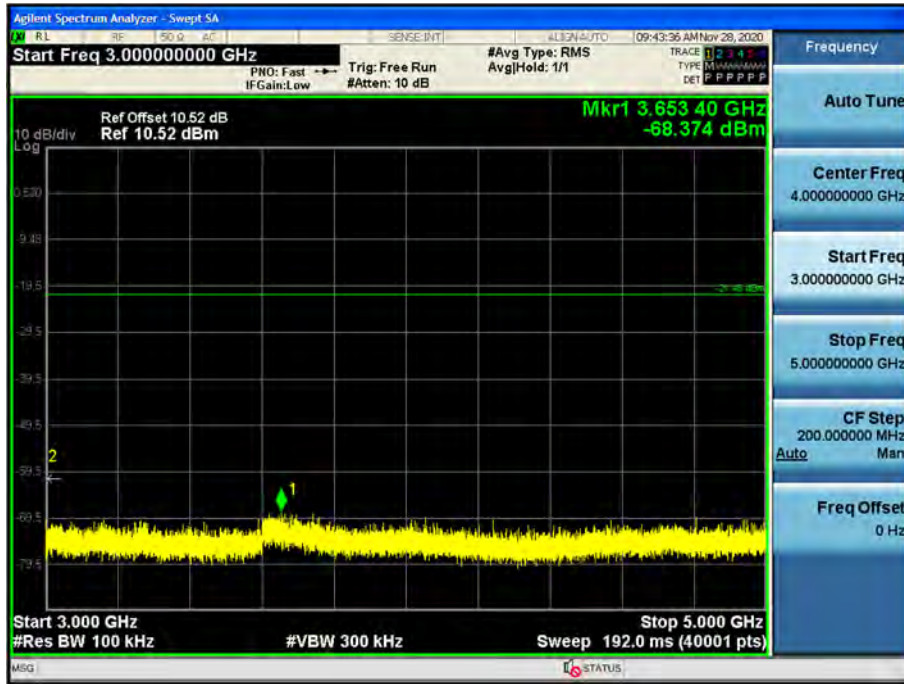

5 GHz ~ 7 GHz


Conducted Spurious Emission (Low-CH 0)

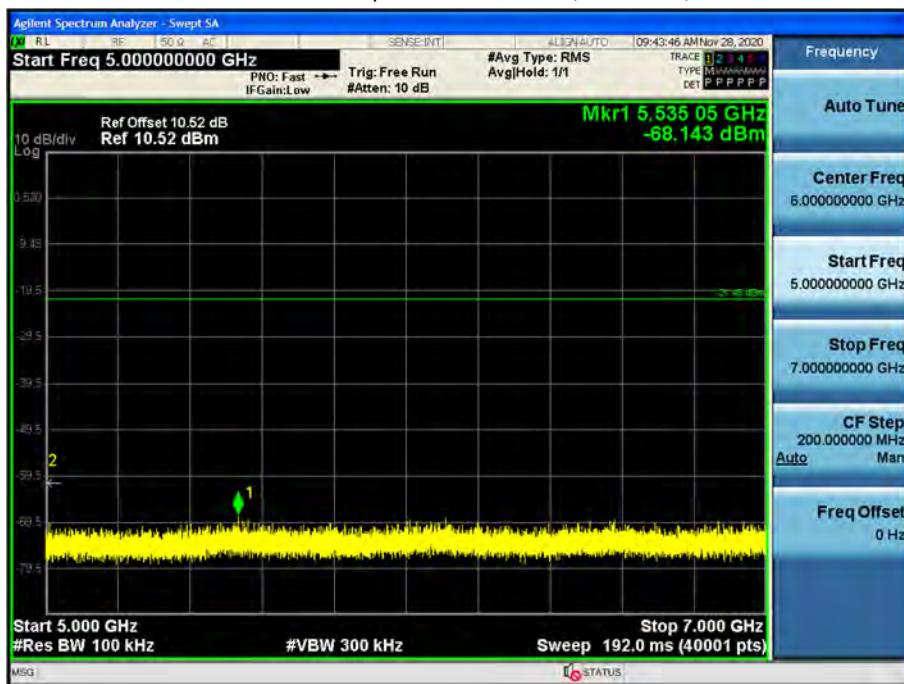




7 GHz ~ 9 GHz

Conducted Spurious Emission (Low-CH 0)

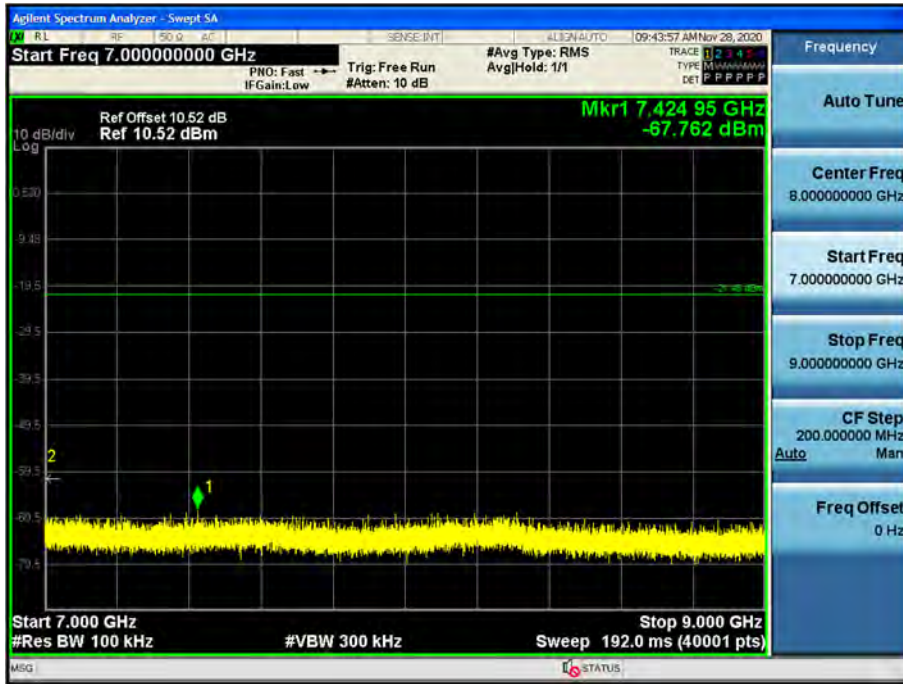


9 GHz ~ 11 GHz

Conducted Spurious Emission (Low-CH 0)

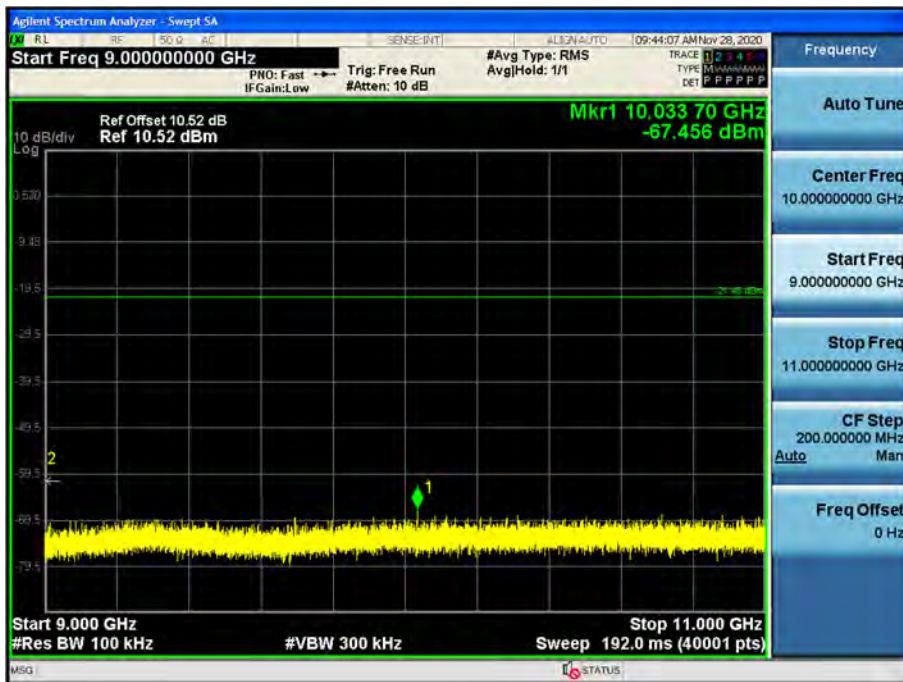


11 GHz ~ 13 GHz

Conducted Spurious Emission (Low-CH 0)

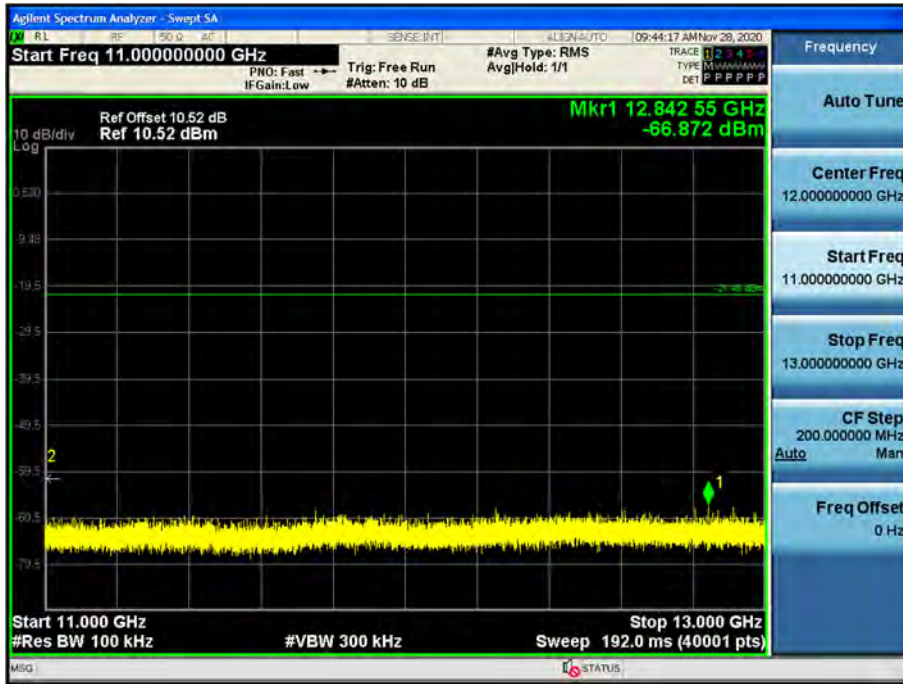


13 GHz ~ 15 GHz

Conducted Spurious Emission (Low-CH 0)

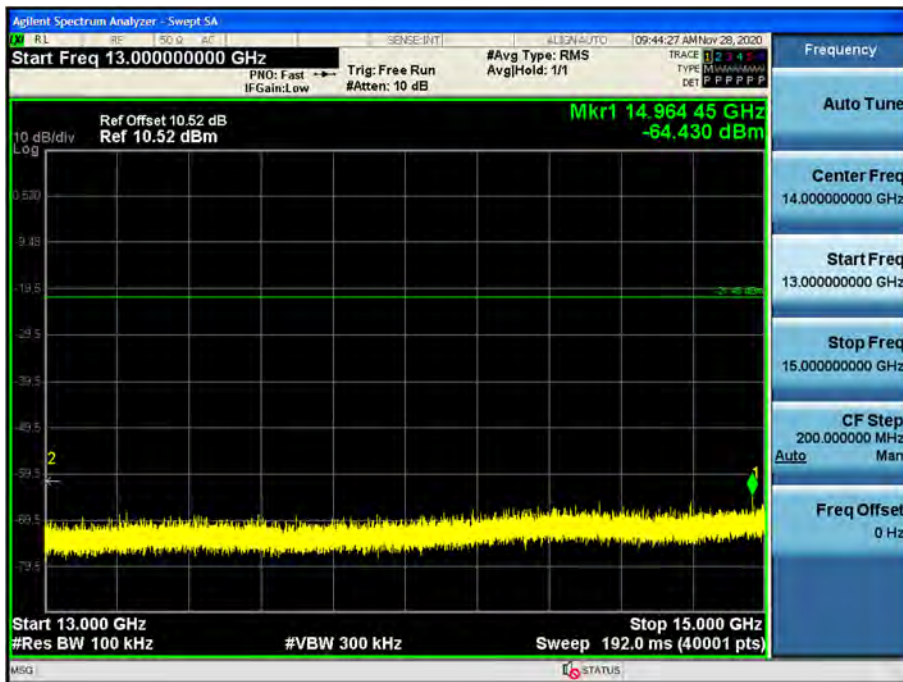


15 GHz ~ 17 GHz

Conducted Spurious Emission (Low-CH 0)

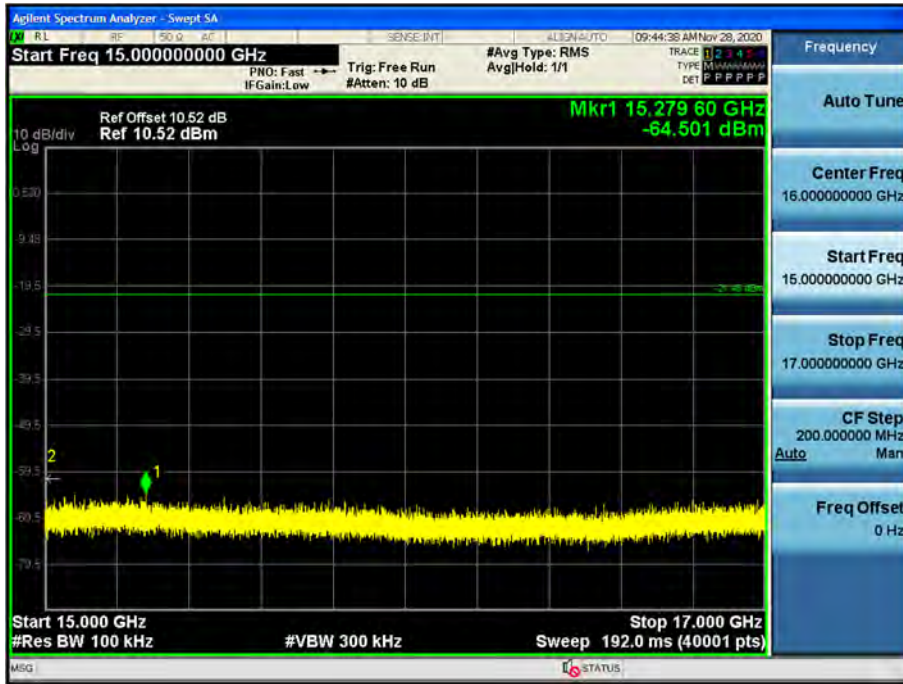

17 GHz ~ 19 GHz


Conducted Spurious Emission (Low-CH 0)

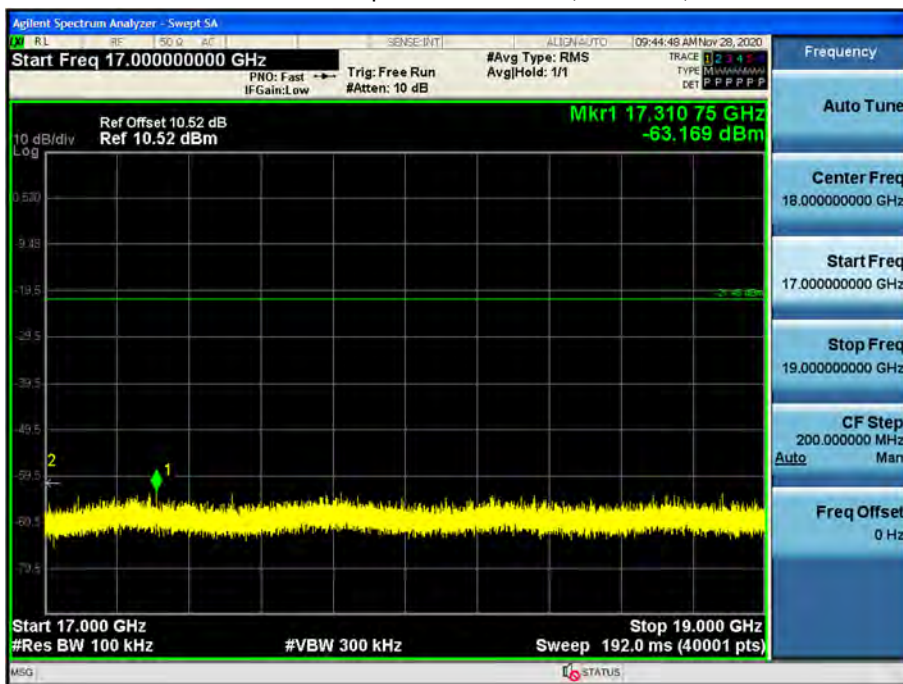




19 GHz ~ 21 GHz

Conducted Spurious Emission (Low-CH 0)

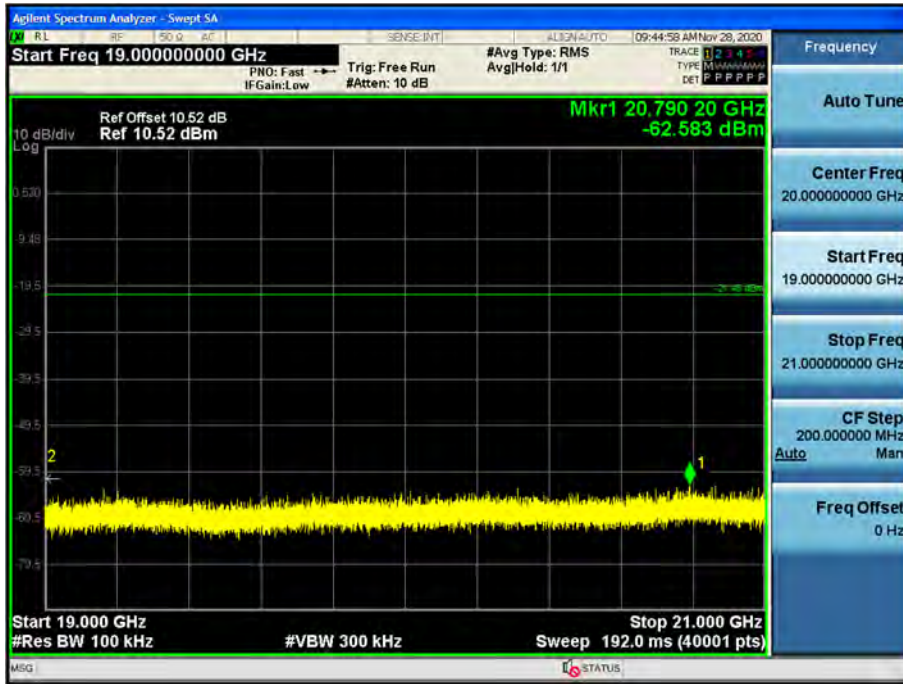

21 GHz ~ 23 GHz


Conducted Spurious Emission (Low-CH 0)

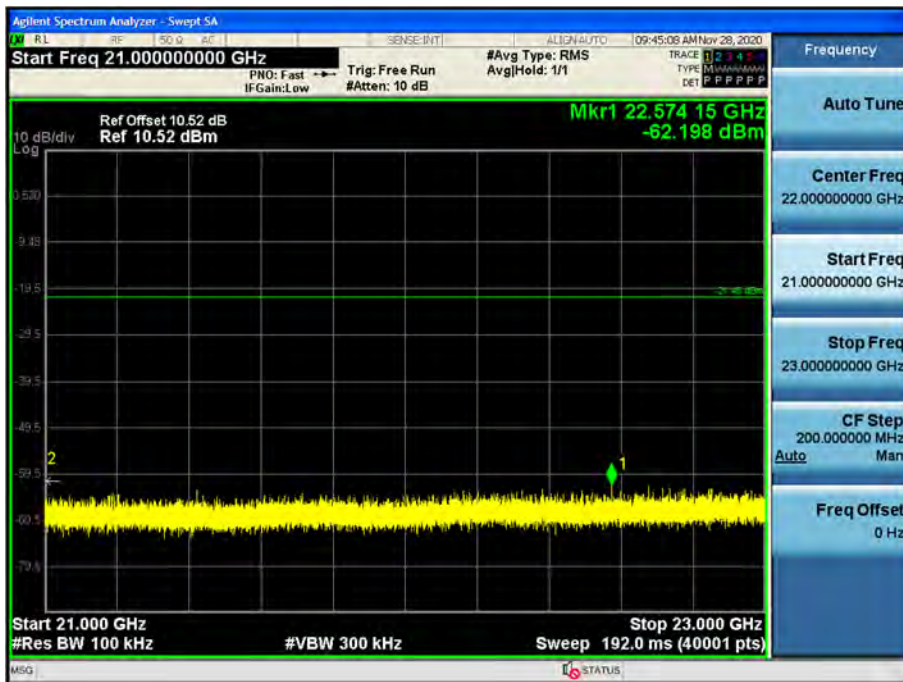



23 GHz ~ 25 GHz


Conducted Spurious Emission (Low-CH 0)

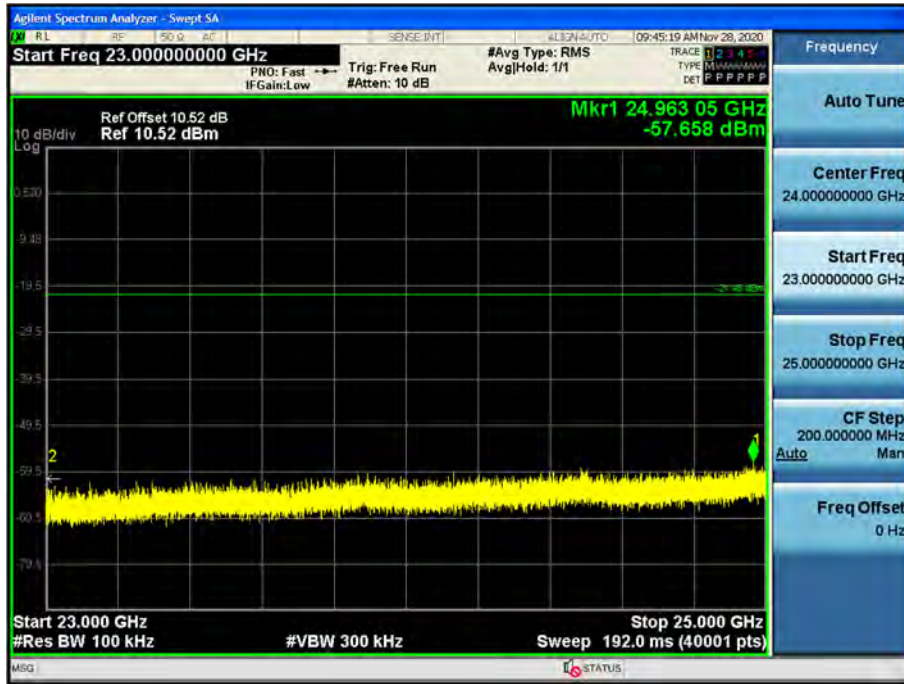

☐ 1M Bit/s (255 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 0)

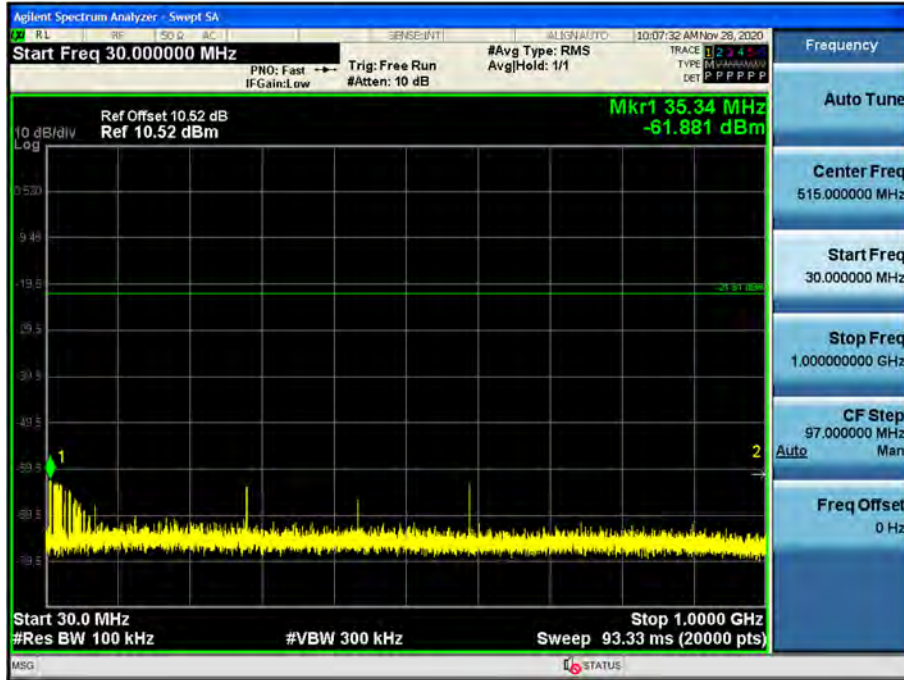


1 GHz ~ 3 GHz

Conducted Spurious Emission (Low-CH 0)

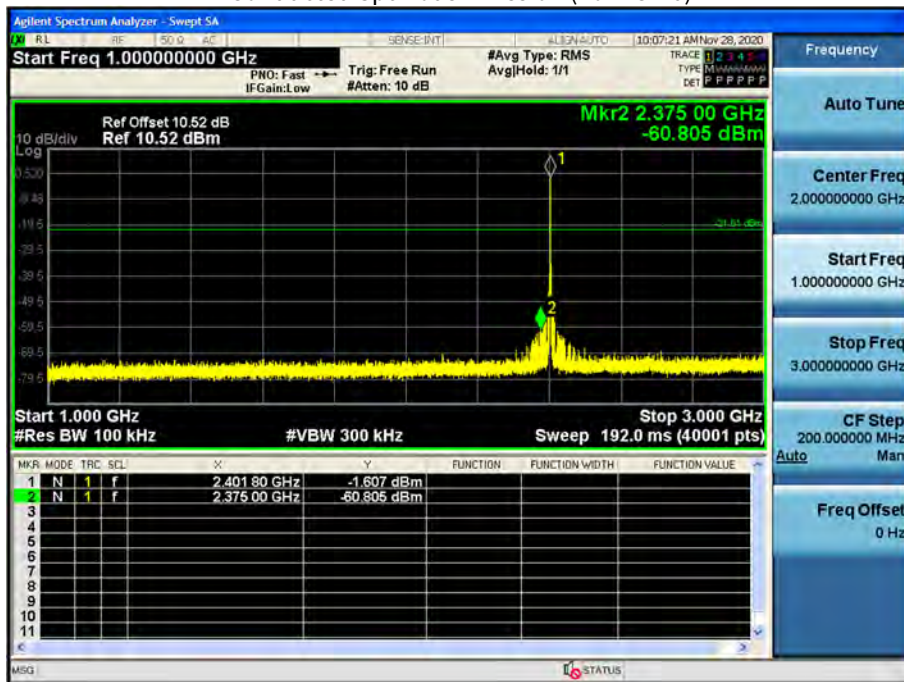


3 GHz ~ 5 GHz

Conducted Spurious Emission (Low-CH 0)

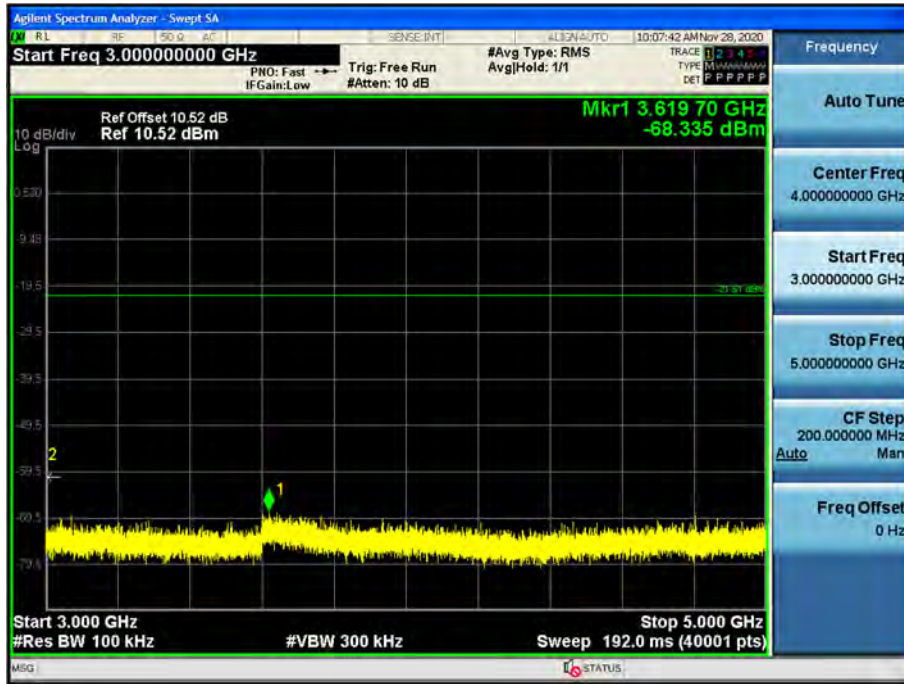


5 GHz ~ 7 GHz

Conducted Spurious Emission (Low-CH 0)

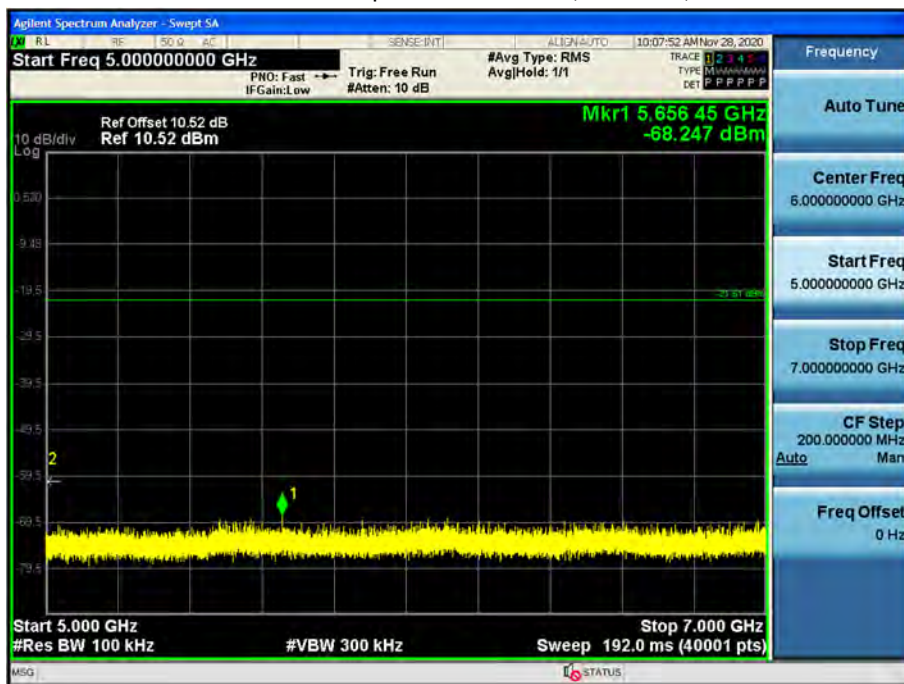


7 GHz ~ 9 GHz

Conducted Spurious Emission (Low-CH 0)

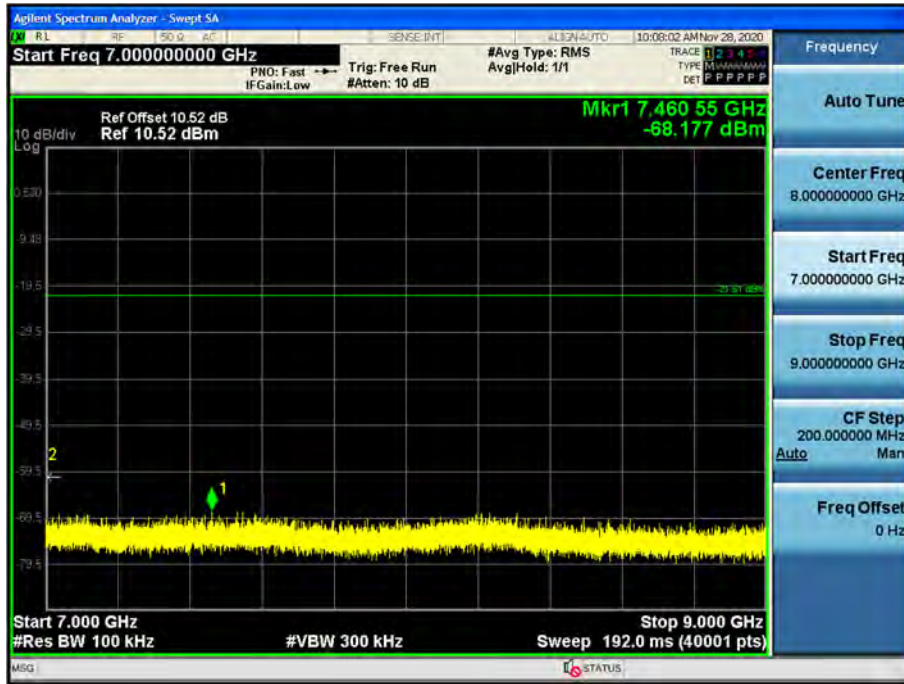


9 GHz ~ 11 GHz

Conducted Spurious Emission (Low-CH 0)

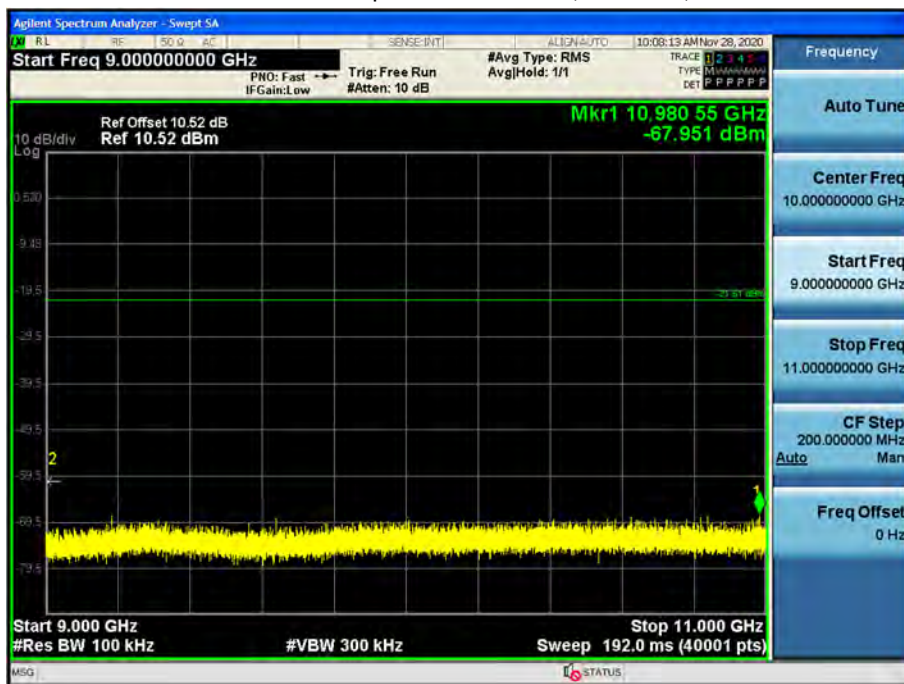


11 GHz ~ 13 GHz

Conducted Spurious Emission (Low-CH 0)

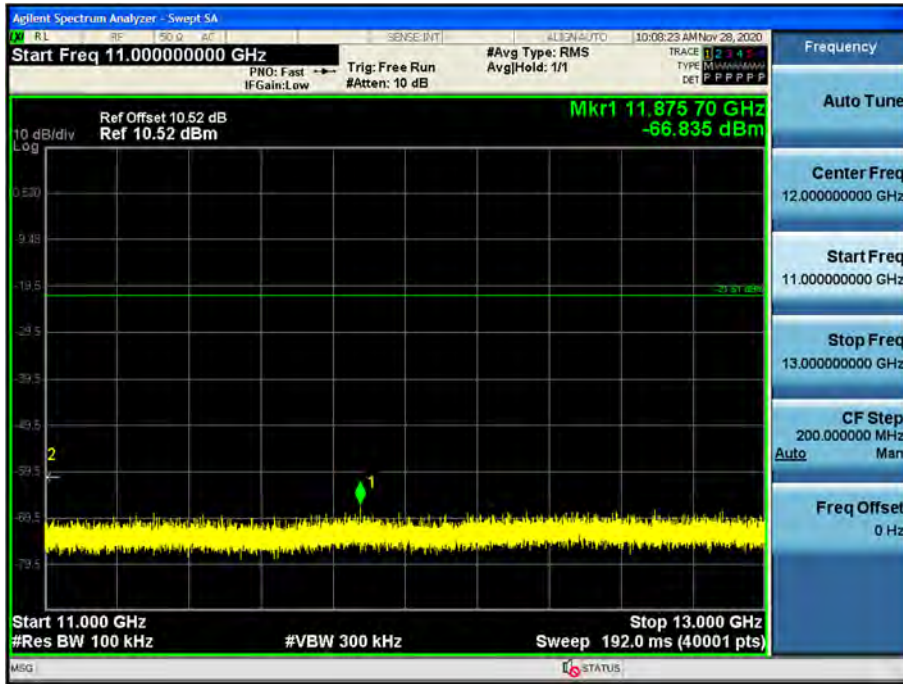


13 GHz ~ 15 GHz

Conducted Spurious Emission (Low-CH 0)

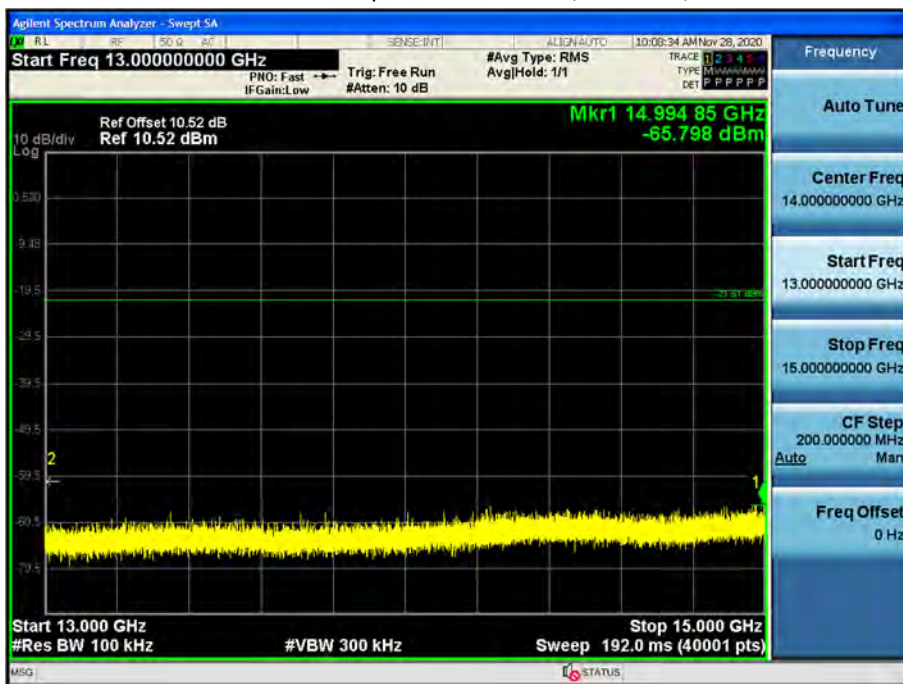


15 GHz ~ 17 GHz

Conducted Spurious Emission (Low-CH 0)

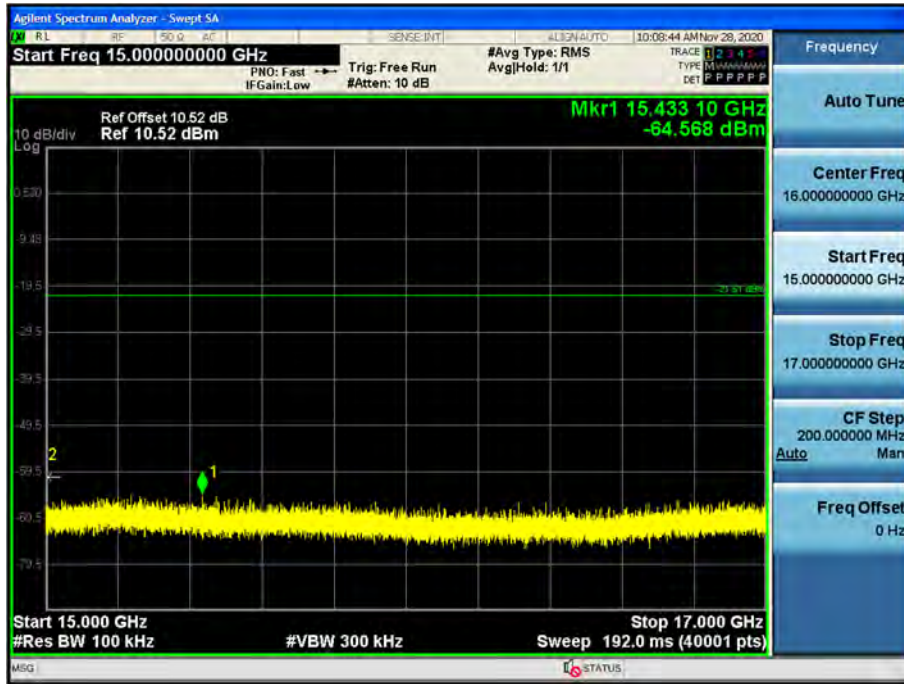


17 GHz ~ 19 GHz

Conducted Spurious Emission (Low-CH 0)

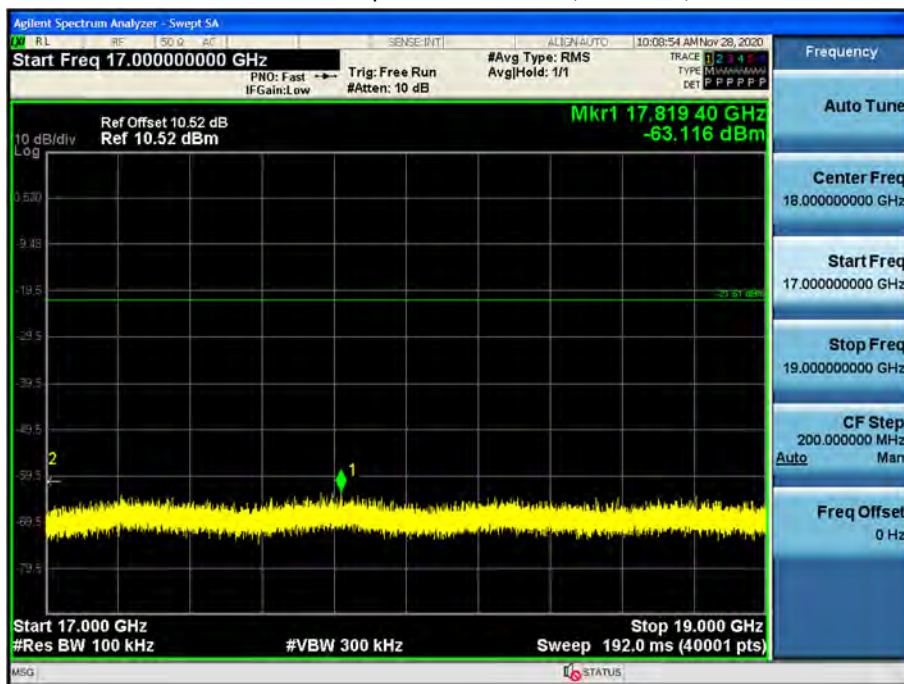


19 GHz ~ 21 GHz

Conducted Spurious Emission (Low-CH 0)

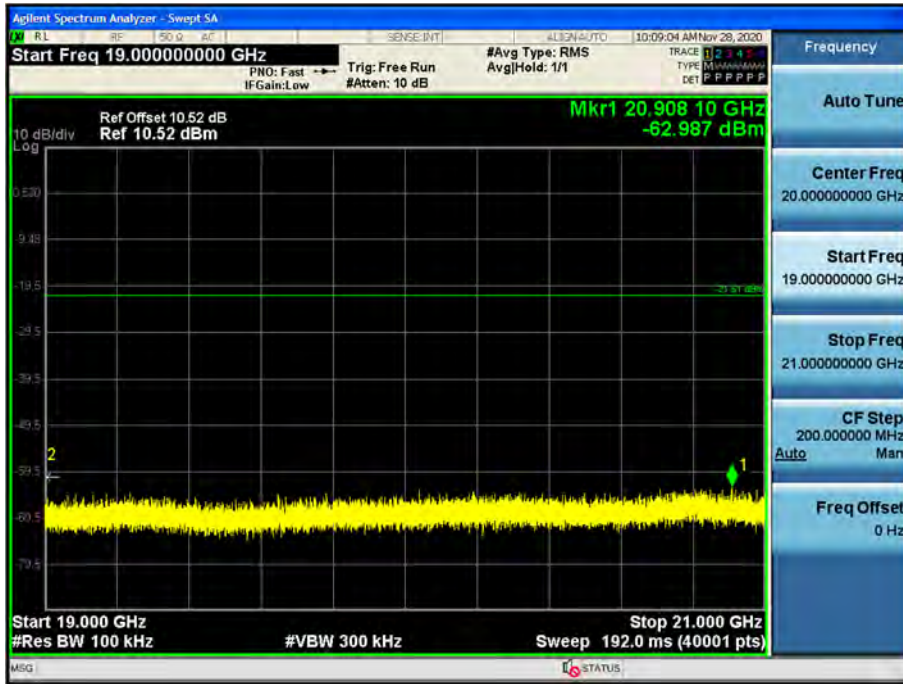


21 GHz ~ 23 GHz

Conducted Spurious Emission (Low-CH 0)

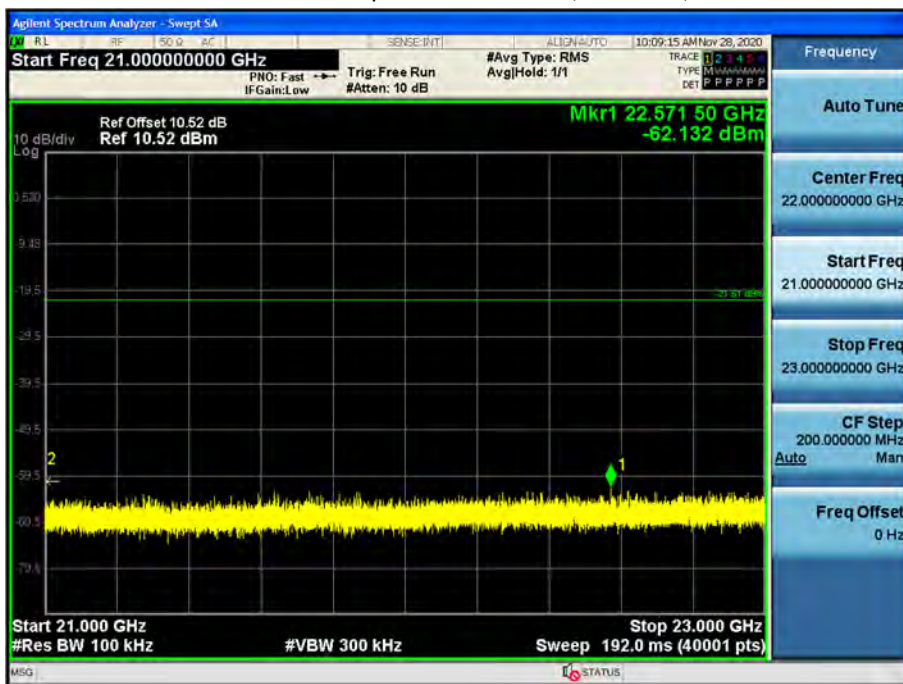

23 GHz ~ 25 GHz

Conducted Spurious Emission (Low-CH 0)

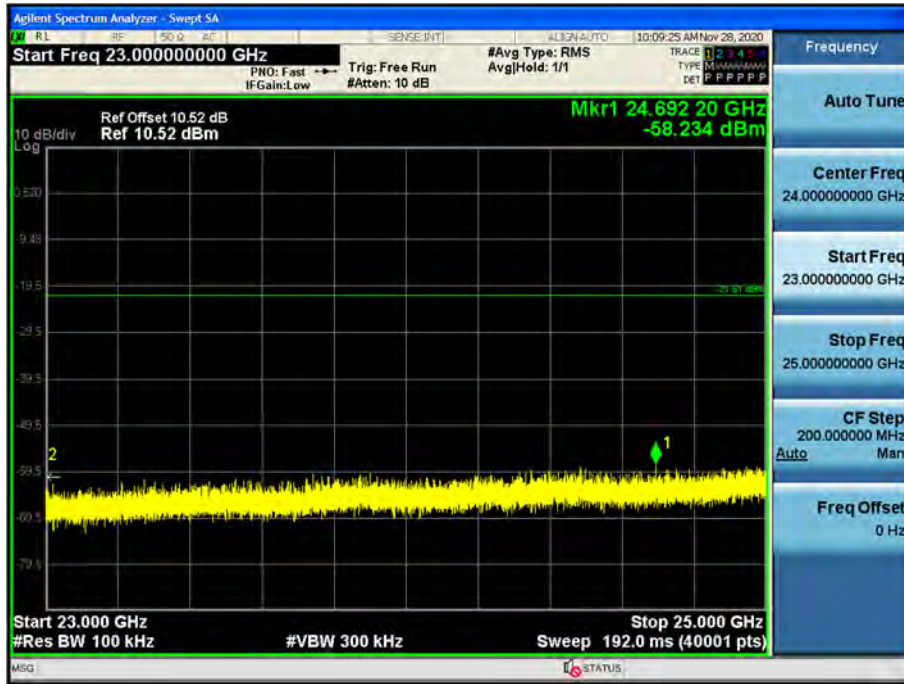



### 9.6 RADIATED SPURIOUS EMISSIONS

#### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

#### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.



Frequency Range : Above 1 GHz

Mode : 1M Bit/s (37 Byte)

Operation Mode: CH Low

Frequency [MHz]	Reading dBuV	Duty Cycle Factor [dB]	A.F+C.L- A.G+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	40.51	0.00	4.21	V	44.72	73.98	29.26	PK
4804	28.52	1.85	4.21	V	34.58	53.98	19.40	AV
7206	39.33	0.00	12.24	V	51.57	73.98	22.41	PK
7206	26.55	1.85	12.24	V	40.64	53.98	13.34	AV
4804	41.90	0.00	4.21	H	46.11	73.98	27.87	PK
4804	29.62	1.85	4.21	H	35.68	53.98	18.30	AV
7206	39.56	0.00	12.24	H	51.80	73.98	22.18	PK
7206	27.46	1.85	12.24	H	41.55	53.98	12.43	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading dBuV	Duty Cycle Factor [dB]	A.F+C.L- A.G+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	40.96	0.00	4.43	V	45.39	73.98	28.59	PK
4880	29.15	1.85	4.43	V	35.43	53.98	18.55	AV
7320	38.06	0.00	12.46	V	50.52	73.98	23.46	PK
7320	26.88	1.85	12.46	V	41.19	53.98	12.79	AV
4880	41.67	0.00	4.43	H	46.10	73.98	27.88	PK
4880	29.71	1.85	4.43	H	35.99	53.98	17.99	AV
7320	39.52	0.00	12.46	H	51.98	73.98	22.00	PK
7320	26.92	1.85	12.46	H	41.23	53.98	12.75	AV

Operation Mode: CH High

Frequency [MHz]	Reading dBuV	Duty Cycle Factor [dB]	A.F+C.L- A.G+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	41.49	0.00	4.83	V	46.32	73.98	27.66	PK
4960	29.74	1.85	4.83	V	36.42	53.98	17.56	AV
7440	38.72	0.00	12.63	V	51.35	73.98	22.63	PK
7440	26.15	1.85	12.63	V	40.63	53.98	13.35	AV
4960	42.40	0.00	4.83	H	47.23	73.98	26.75	PK
4960	30.21	1.85	4.83	H	36.89	53.98	17.09	AV
7440	39.98	0.00	12.63	H	52.61	73.98	21.37	PK
7440	27.51	1.85	12.63	H	41.99	53.98	11.99	AV

Mode : 1M Bit/s (255 Byte)

Operation Mode: CH Low

Frequency [MHz]	Reading dBuV	Duty Cycle Factor [dB]	A.F+C.L- A.G+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	40.99	0.00	4.21	V	45.20	73.98	28.78	PK
4804	29.65	0.66	4.21	V	34.52	53.98	19.46	AV
7206	38.53	0.00	12.24	V	50.77	73.98	23.21	PK
7206	26.62	0.66	12.24	V	39.52	53.98	14.46	AV
4804	41.94	0.00	4.21	H	46.15	73.98	27.83	PK
4804	29.81	0.66	4.21	H	34.68	53.98	19.30	AV
7206	38.96	0.00	12.24	H	51.20	73.98	22.78	PK
7206	27.44	0.66	12.24	H	40.34	53.98	13.64	AV

Operation Mode: CH Mid


Frequency [MHz]	Reading dBuV	Duty Cycle Factor [dB]	A.F+C.L- A.G+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	41.52	0.00	4.43	V	45.95	73.98	28.03	PK
4880	29.15	0.66	4.43	V	34.24	53.98	19.74	AV
7320	37.57	0.00	12.46	V	50.03	73.98	23.95	PK
7320	26.99	0.66	12.46	V	40.11	53.98	13.87	AV
4880	42.14	0.00	4.43	H	46.57	73.98	27.41	PK
4880	29.68	0.66	4.43	H	34.77	53.98	19.21	AV
7320	38.75	0.00	12.46	H	51.21	73.98	22.77	PK
7320	27.06	0.66	12.46	H	40.18	53.98	13.80	AV

Operation Mode: CH High


Frequency [MHz]	Reading dBuV	Duty Cycle Factor [dB]	A.F+C.L- A.G+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	41.61	0.00	4.83	V	46.44	73.98	27.54	PK
4960	30.06	0.66	4.83	V	35.55	53.98	18.43	AV
7440	39.48	0.00	12.63	V	52.11	73.98	21.87	PK
7440	27.02	0.66	12.63	V	40.31	53.98	13.67	AV
4960	41.90	0.00	4.83	H	46.73	73.98	27.25	PK
4960	30.30	0.66	4.83	H	35.79	53.98	18.19	AV
7440	39.69	0.00	12.63	H	52.32	73.98	21.66	PK
7440	27.08	0.66	12.63	H	40.37	53.98	13.61	AV

1M Bit/s (37 Byte) Test Plots (Worst case : Z-H)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

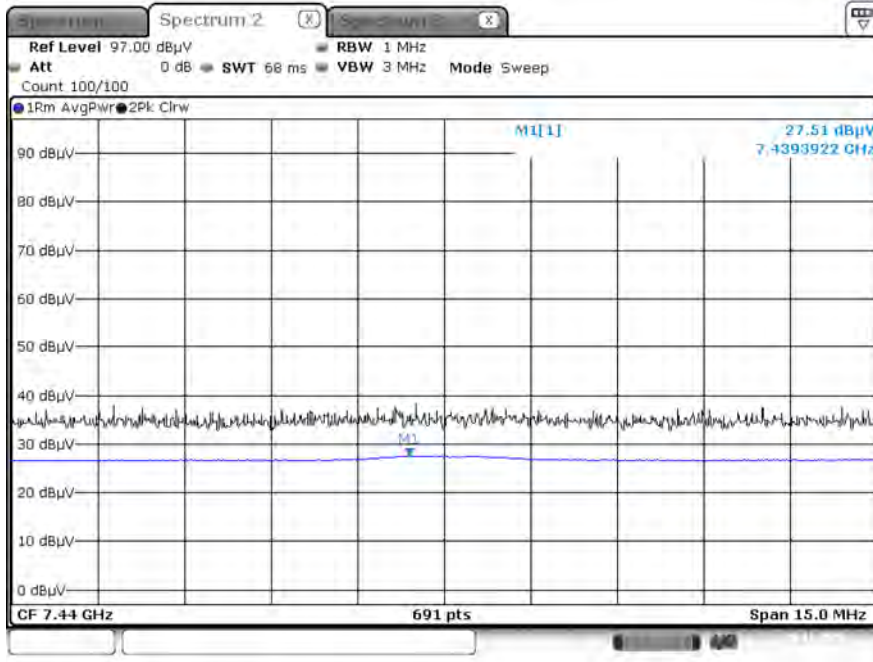

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

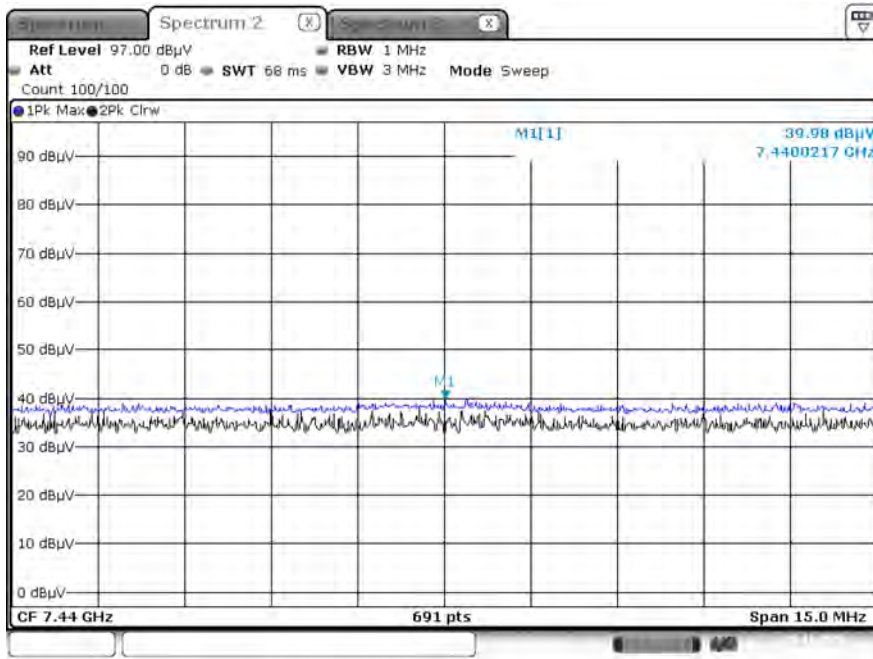

**Note:**

Plot of worst case are only reported.

### 9.7 RADIATED RESTRICTED BAND EDGES

**Mode : 1M Bit/s (37 Byte)**

Operating Frequency                    2402 MHz  
 Channel No.                                0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	※ A.F+C.L+ Att-A.G+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	62.87	0.00	2.61	H	65.48	73.98	8.50	PK
2390.0	37.19	1.85	2.61	H	41.65	53.98	12.33	AV
2390.0	61.22	0.00	2.61	V	63.83	73.98	10.15	PK
2390.0	36.17	1.85	2.61	V	40.63	53.98	13.35	AV

**Mode : 1M Bit/s (37 Byte)**

Operating Frequency                    2480 MHz  
 Channel No.                                39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	※ A.F+C.L+ Att-A.G+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5#(2484)	59.98	0.00	3.13	H	63.11	73.98	10.87	PK
2483.5#(2484)	41.66	1.85	3.13	H	46.64	53.98	7.34	AV
2483.5#(2485)	58.25	0.00	3.13	H	61.38	73.98	12.60	PK
2483.5#(2485)	39.97	1.85	3.13	H	44.95	53.98	9.03	AV
2485.5~2500	68.67	0.00	3.13	H	71.80	73.98	2.18	PK
2485.5~2500	41.06	1.85	3.13	H	46.04	53.98	7.94	AV

Note : # integration method Used (ANSI C63.10 Section11.13.3)

**Mode : 1M Bit/s (255 Byte)**

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	※ A.F+C.L+ Att-A.G+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	62.76	0.00	2.61	H	65.37	73.98	8.61	PK
2390.0	36.42	0.66	2.61	H	39.69	53.98	14.29	AV
2390.0	60.96	0.00	2.61	V	63.57	73.98	10.41	PK
2390.0	35.78	0.66	2.61	V	39.05	53.98	14.93	AV

**Mode : 1M Bit/s (255 Byte)**

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	※ A.F+C.L+ Att-A.G+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5#(2484)	61.72	0.00	3.13	H	64.85	73.98	9.13	PK
2483.5#(2484)	39.49	0.66	3.13	H	43.28	53.98	10.70	AV
2483.5#(2485)	59.71	0.00	3.13	H	62.84	73.98	11.14	PK
2483.5#(2485)	38.44	0.66	3.13	H	42.23	53.98	11.75	AV
2485.5~2500	69.02	0.00	3.13	H	72.15	73.98	1.83	PK
2485.5~2500	38.73	0.66	3.13	H	42.52	53.98	11.46	AV


Note : # integration method Used (ANSI C63.10 Section11.13.3)

**Note:** All data Worst case Duty Cycle Correction Factor applied.




Mode : 1M Bit/s (255 Byte) Test Plots


Radiated Restricted Band Edges plot – Average Reading (Ch.39, Z-H) 2484 MHz

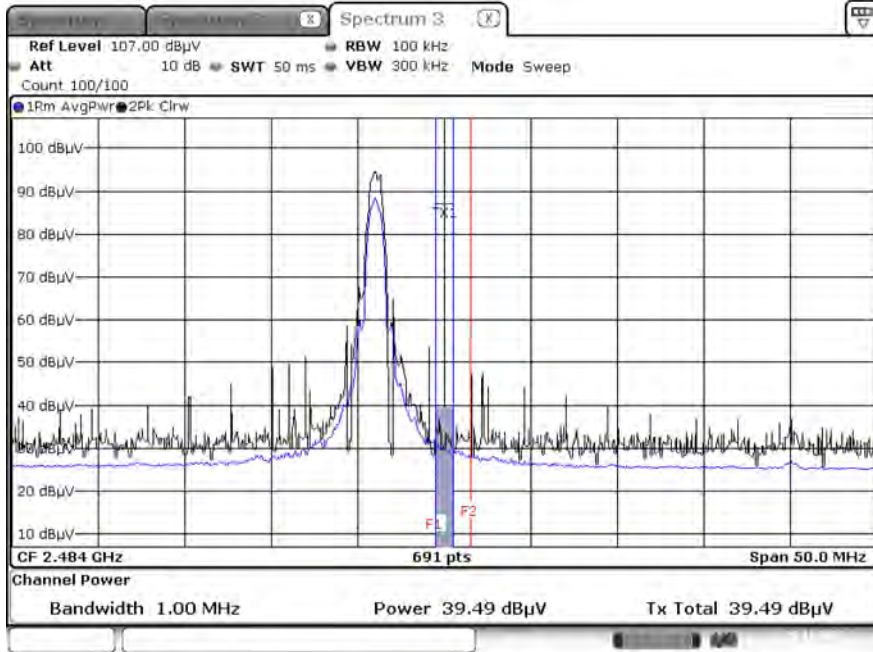


Radiated Restricted Band Edges plot – Peak Reading (Ch.39, Z-H) 2484MHz

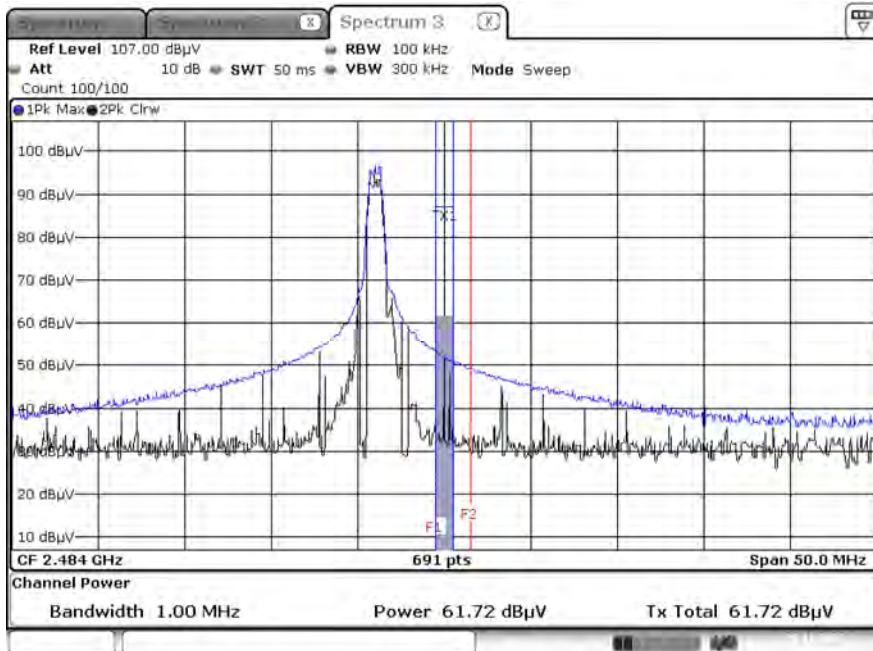


Radiated Restricted Band Edges plot – Average Reading (Ch.39, Z-H) 2485MHz

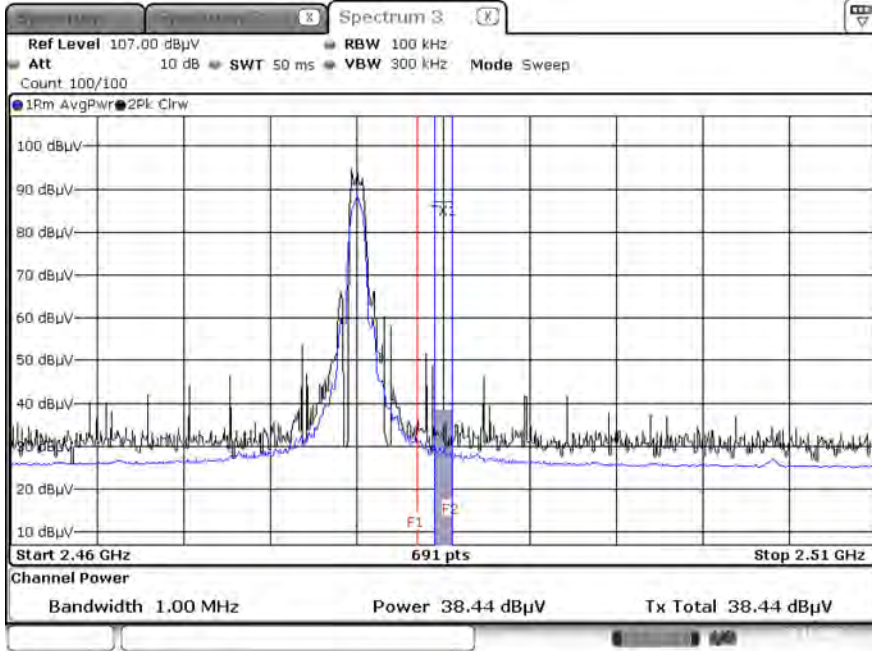


Radiated Restricted Band Edges plot – Peak Reading (Ch.39, Z-H) 2485MHz

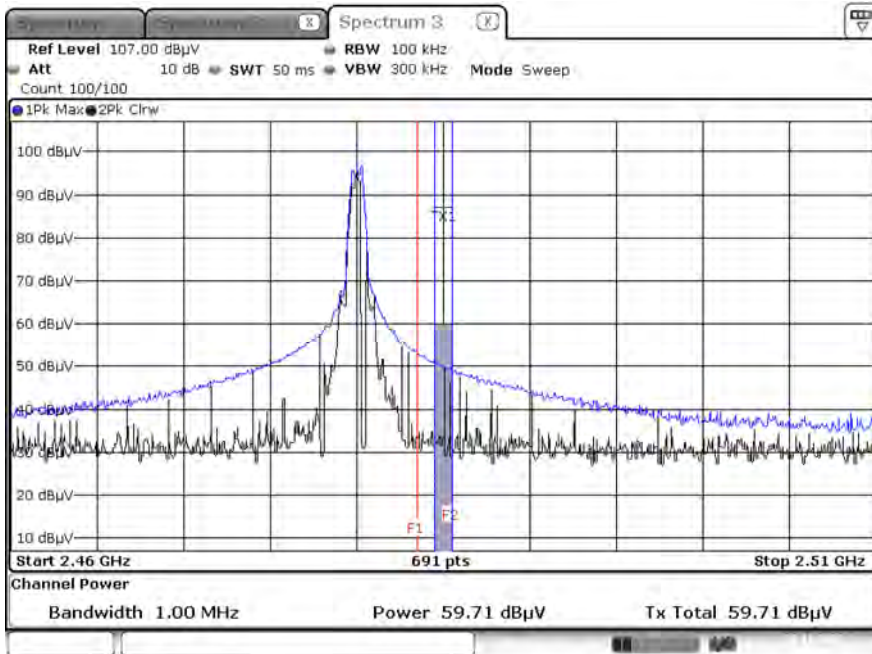

Radiated Restricted Band Edges plot – Average Reading (Ch.39, Z-H)2485.5 MHz ~ 2500MHz

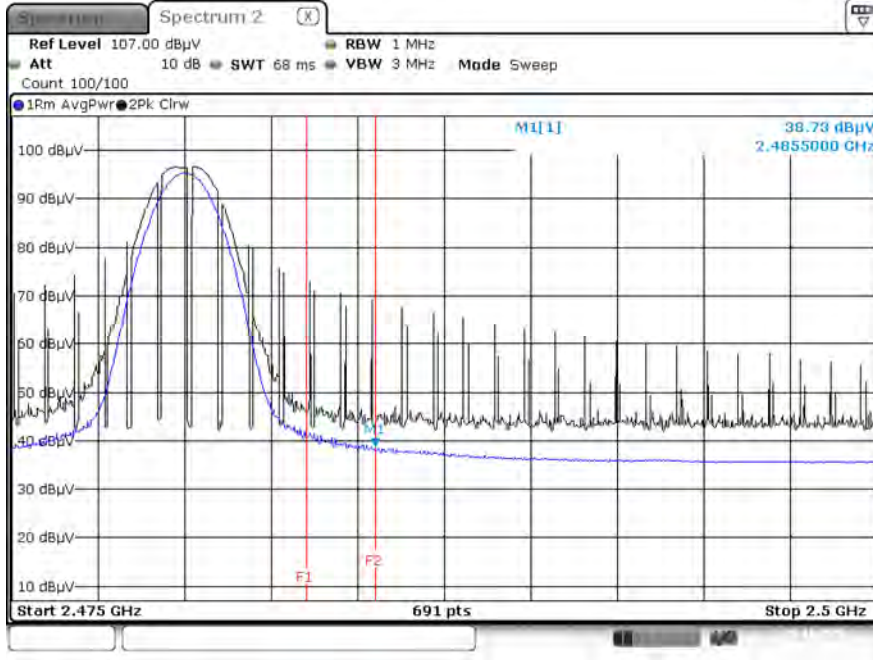

Radiated Restricted Band Edges plot – Peak Reading (Ch.39, Z-H) 2485.5 MHz ~ 2500MHz

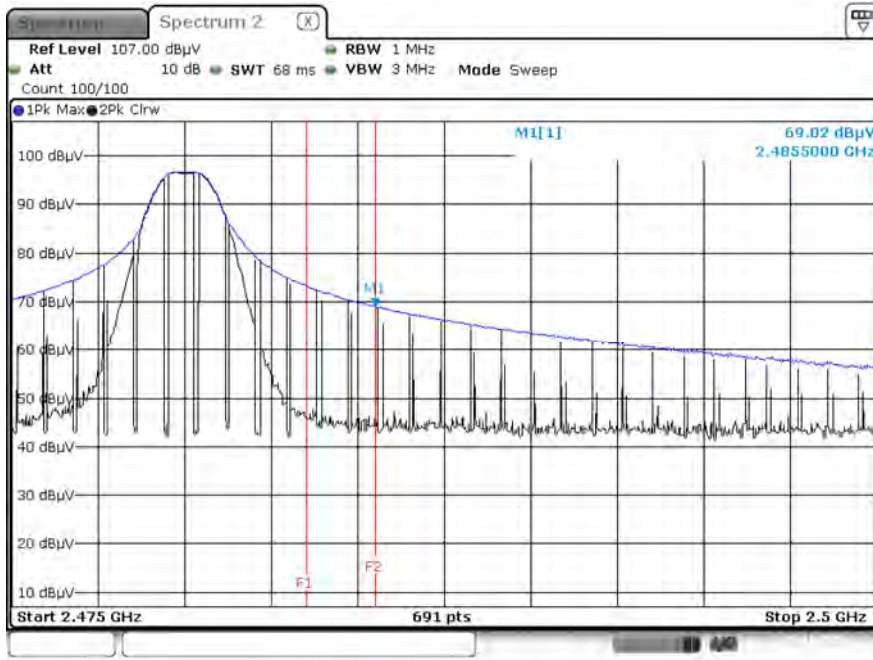

**Note:**

Plot of worst case are only reported.

### 9.8 RECEIVER SPURIOUS EMISSIONS

#### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

#### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

## 9.9 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: LGIT\_ETGBBTBP01  
 Manufacturer: LG INNOTEK  
 Test Site: SHIELD ROOM  
 Operating Conditions: BTLE MODE\_N

FCC CLASS B

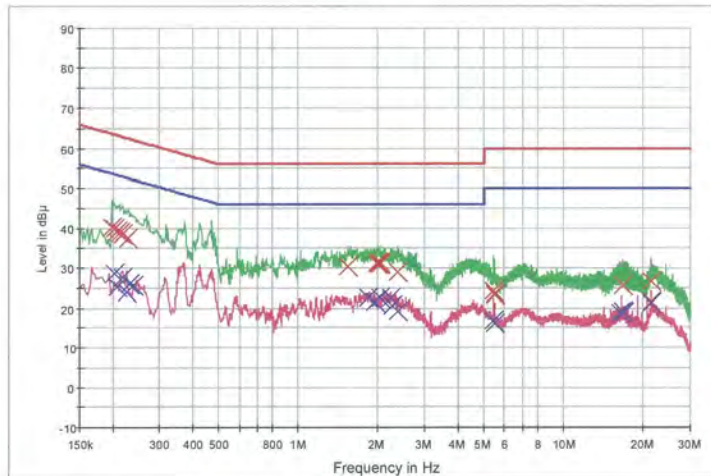

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	40.3	9.000	On	N	9.7	23.4	63.7
0.204000	39.8	9.000	On	N	9.7	23.6	63.4
0.208000	39.1	9.000	On	N	9.7	24.2	63.3
0.212000	38.8	9.000	On	N	9.7	24.3	63.1
0.218000	38.5	9.000	On	N	9.7	24.4	62.9
0.228000	37.5	9.000	On	N	9.7	25.0	62.5
1.532000	30.2	9.000	On	N	9.8	25.8	56.0
1.980000	31.5	9.000	On	N	9.8	24.5	56.0
1.984000	31.0	9.000	On	N	9.8	25.0	56.0
2.030000	31.4	9.000	On	N	9.8	24.6	56.0
2.034000	31.1	9.000	On	N	9.8	24.9	56.0
2.372000	28.9	9.000	On	N	9.8	27.1	56.0
5.466000	24.1	9.000	On	N	9.8	35.9	60.0
5.484000	23.6	9.000	On	N	9.8	36.4	60.0
5.492000	23.2	9.000	On	N	9.8	36.8	60.0
16.746000	25.5	9.000	On	N	10.0	34.5	60.0
21.314000	21.6	9.000	On	N	10.1	38.4	60.0
21.322000	26.5	9.000	On	N	10.1	33.5	60.0

2020-11-19

오후 4:41:53

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.204000	28.8	9.000	On	N	9.7	24.6	53.4
0.208000	25.2	9.000	On	N	9.7	28.1	53.3
0.218000	27.7	9.000	On	N	9.7	25.2	52.9
0.226000	23.9	9.000	On	N	9.7	28.7	52.6
0.230000	26.0	9.000	On	N	9.7	26.5	52.4
0.240000	25.5	9.000	On	N	9.7	26.6	52.1
1.826000	22.6	9.000	On	N	9.8	23.4	46.0
1.938000	21.5	9.000	On	N	9.8	24.5	46.0
2.034000	22.6	9.000	On	N	9.8	23.4	46.0
2.240000	22.5	9.000	On	N	9.8	23.5	46.0
2.268000	20.7	9.000	On	N	9.8	25.3	46.0
2.372000	19.2	9.000	On	N	9.8	26.8	46.0
5.466000	16.7	9.000	On	N	9.8	33.3	50.0
5.490000	16.0	9.000	On	N	9.8	34.0	50.0
16.310000	18.9	9.000	On	N	10.0	31.1	50.0
16.762000	19.0	9.000	On	N	10.0	31.0	50.0
16.840000	18.9	9.000	On	N	10.0	31.1	50.0
21.322000	21.2	9.000	On	N	10.1	28.8	50.0

2020-11-19

오후 4:41:53

**Conducted Emissions (Line 2)**

Test


1 / 2

## HCT TEST Report

**Common Information**

EUT:	LGIT_ETGBBTP01
Manufacturer:	LG INNOTEK
Test Site:	SHIELD ROOM
Operating Conditions:	BTLE MODE_L1

FCC CLASS B

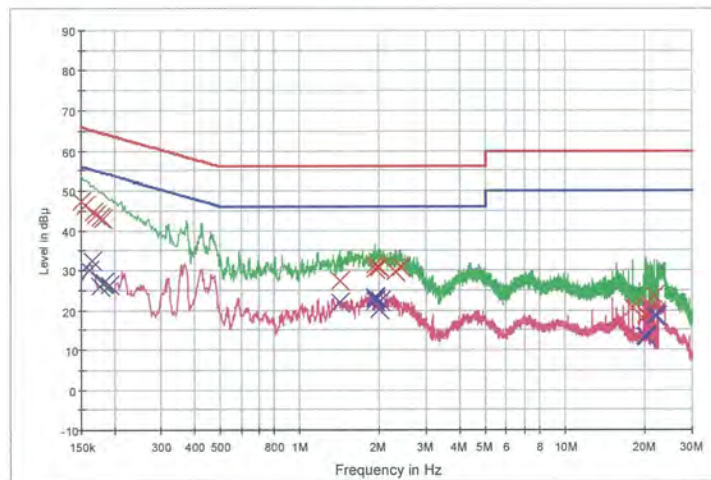

<span style="color: red;">—</span> FCC CLASS B_QP	<span style="color: blue;">—</span> FCC CLASS B_AV	<span style="color: green;">—</span> Preview Result 1-PK+
<span style="color: red;">—</span> Preview Result 2-AVG	<span style="color: blue;">X</span> Final Result 1-QPK	<span style="color: green;">X</span> Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	47.2	9.000	On	L1	9.8	18.8	66.0
0.156000	46.3	9.000	On	L1	9.8	19.4	65.7
0.166000	44.6	9.000	On	L1	9.8	20.6	65.2
0.170000	43.9	9.000	On	L1	9.8	21.1	65.0
0.176000	43.3	9.000	On	L1	9.8	21.3	64.7
0.180000	42.8	9.000	On	L1	9.8	21.7	64.5
1.418000	27.4	9.000	On	L1	9.8	28.6	56.0
1.912000	30.4	9.000	On	L1	9.8	25.6	56.0
1.926000	31.3	9.000	On	L1	9.8	24.7	56.0
1.998000	30.7	9.000	On	L1	9.8	25.3	56.0
2.298000	29.8	9.000	On	L1	9.8	26.2	56.0
2.392000	30.6	9.000	On	L1	9.8	25.4	56.0
17.846000	20.5	9.000	On	L1	10.0	39.5	60.0
20.072000	18.7	9.000	On	L1	10.1	41.3	60.0
20.076000	18.7	9.000	On	L1	10.1	41.3	60.0
20.130000	18.8	9.000	On	L1	10.1	41.2	60.0
20.272000	18.3	9.000	On	L1	10.1	41.7	60.0
21.698000	23.7	9.000	On	L1	10.1	36.3	60.0

2020-11-19

오후 4:52:48

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.160000	29.9	9.000	On	L1	9.8	25.5	55.5
0.164000	32.2	9.000	On	L1	9.8	23.0	55.3
0.176000	26.0	9.000	On	L1	9.8	28.7	54.7
0.180000	26.5	9.000	On	L1	9.8	28.0	54.5
0.184000	27.1	9.000	On	L1	9.8	27.2	54.3
0.192000	26.2	9.000	On	L1	9.8	27.7	53.9
1.418000	21.8	9.000	On	L1	9.8	24.2	46.0
1.912000	22.2	9.000	On	L1	9.8	23.8	46.0
1.926000	23.1	9.000	On	L1	9.8	22.9	46.0
1.930000	23.0	9.000	On	L1	9.8	23.0	46.0
1.998000	20.1	9.000	On	L1	9.8	25.9	46.0
2.022000	22.2	9.000	On	L1	9.8	23.8	46.0
20.028000	13.5	9.000	On	L1	10.1	36.5	50.0
20.072000	13.3	9.000	On	L1	10.1	36.7	50.0
20.076000	13.2	9.000	On	L1	10.1	36.8	50.0
20.130000	13.1	9.000	On	L1	10.1	36.9	50.0
21.698000	18.4	9.000	On	L1	10.1	31.6	50.0
22.224000	18.4	9.000	On	L1	10.1	31.6	50.0

2020-11-19

오후 4:52:48



## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/10/2020	Annual	100584
ESPEC	SU-642 / Temperature Chamber	07/30/2020	Annual	0093000718
Agilent	N9030A / Signal Analyzer	03/23/2020	Annual	MY49432108
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Agilent	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
HP	E3632A / DC Power Supply	09/16/2020	Annual	MY40004427
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	07/03/2020	Annual	08285
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Schwarzbeck	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/29/2019	Biennial	BBHA9170342
Rohde & Schwarz	FSP(10 Hz ~ 40 GHz) / Spectrum Analyzer	05/13/2020	Annual	101055
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/21/2020	Annual	F6
TNM system	FBSM-05B / ATT(10dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / ATT(3dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / LNA1(1~18GHz)	01/21/2020	Annual	25540
TNM system	FBSM-05B / HPF(7~18GHz) + LNA2(6~18GHz)	01/21/2020	Annual	28550
TNM system	FBSM-05B / Thru(30MHz ~ 18GHz)	01/21/2020	Annual	None

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017)..

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2012-FI001-P