



TEST REPORT

FCC/ISED DTS Test for ETGFFRBU01
Certification

APPLICANT
LG Innotek Co., Ltd.

REPORT NO.
HCT-RF-2106-FI007

DATE OF ISSUE
June 14, 2021

Tested by
Jin Gwan Lee

Technical Manager
Se Wook Park

Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC/ISED DTS Test
for ETGFFRBU01

REPORT NO.
HCT-RF-2106-FI007

DATE OF ISSUE
June 14, 2021

Additional Model
-

Applicant **LG Innotek Co., Ltd.**
E1/E3, 30, Magokjungang 10-ro, Gangseo-gu, Seoul, 07796, Korea

Eut Type
Model Name Wi-Fi Dongle
ETGFFRBU01

FCC ID
IC YZP-ETGFFRBU01
7414C-ETGFFRBU01

Modulation type CCK/DSSS/OFDM

FCC Classification Digital Transmission System(DTS)

FCC Rule Part(s) Part 15.247

ISED Rule Part(s) RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue | Description |
|--------------|---------------|-----------------|
| 0 | June 14, 2021 | Initial Release |

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 AND KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

CONTENTS

| | |
|---------------------------------------------|----|
| 1. EUT DESCRIPTION | 5 |
| ANTENNA CONFIGURATIONS | 6 |
| 2. TEST METHODOLOGY | 7 |
| EUT CONFIGURATION | 7 |
| EUT EXERCISE | 7 |
| GENERAL TEST PROCEDURES | 7 |
| DESCRIPTION OF TEST MODES | 8 |
| 3. INSTRUMENT CALIBRATION | 8 |
| 4. FACILITIES AND ACCREDITATIONS | 8 |
| FACILITIES | 8 |
| EQUIPMENT | 8 |
| 5. ANTENNA REQUIREMENTS | 9 |
| 6. MEASUREMENT UNCERTAINTY | 9 |
| 7. DESCRIPTION OF TESTS | 10 |
| 8. SUMMARY TEST OF RESULTS | 30 |
| 9. TEST RESULT | 32 |
| 9.1 DUTY CYCLE | 32 |
| 9.2 6dB BANDWIDTH & 99 % BANDWIDTH | 33 |
| 9.3 OUTPUT POWER | 45 |
| 9.4 POWER SPECTRAL DENSITY | 49 |
| 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS | 56 |
| 9.6 RADIATED SPURIOUS EMISSIONS | 85 |
| 9.7 RADIATED RESTRICTED BAND EDGES | 89 |
| 9.8 RECEIVER SPURIOUS EMISSIONS | 94 |
| 10. LIST OF TEST EQUIPMENT | 95 |
| 11. ANNEX A_ TEST SETUP PHOTO | 97 |

1. EUT DESCRIPTION

| | | | |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------|--------------------------------------------------------------------------------------------------|
| Model | ETGFFRBU01 | | |
| Additional Model | - | | |
| EUT Type | Wi-Fi Dongle | | |
| Power Supply | DC 5.00 V | | |
| Frequency Range | 2412 MHz - 2472 MHz | | |
| Max. RF Output Power | Peak Power | Ant. 1 (SISO) | 802.11b: 19.83 dBm 802.11g: 22.21 dBm 802.11n(HT20): 21.82 dBm 802.11n(HT40): 21.81 dBm |
| | | Ant. 2 (SISO) | 802.11b: 19.20 dBm 802.11g: 22.28 dBm 802.11n(HT20): 21.89 dBm 802.11n(HT40): 21.29 dBm |
| | | Ant. 1 + Ant. 2 (MIMO) | 802.11b: 22.54 dBm 802.11g: 25.26 dBm 802.11n(HT20): 24.85 dBm 802.11n(HT40): 24.57 dBm |
| | Average Power | Ant. 1 (SISO) | 802.11b: 14.27 dBm 802.11g: 14.42 dBm 802.11n(HT20): 13.86 dBm 802.11n(HT40): 13.98 dBm |
| | | Ant. 2 (SISO) | 802.11b: 13.63 dBm 802.11g: 14.37 dBm 802.11n(HT20): 13.98 dBm 802.11n(HT40): 13.46 dBm |
| | | Ant. 1 + Ant. 2 (MIMO) | 802.11b: 16.94 dBm 802.11g: 17.40 dBm 802.11n(HT20): 16.91 dBm 802.11n(HT40): 16.74 dBm |
| Modulation Type | DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n | | |
| Number of Channels | 13 Channels | | |
| Antenna type | PCB printed antenna | | |
| Antenna Peak Gain | Ant 1 : 1.50 dBi Ant 2 : 0.82 dBi | | |
| Date(s) of Tests | April 21, 2021 ~ June 08, 2021 | | |
| PMN (Product Marketing Number) | Wi-Fi Dongle | | |
| HVIN (Hardware Version Identification Number) | ETGFFRBU01 | | |
| FVIN (Firmware Version Identification Number) | 1.0 | | |
| HMN (Host Marketing Name) | N/A | | |
| EUT serial numbers | Radiated : ETGFFRBU01-01 Conducted : ETGFFRBU01-02 | | |
| Manufacturer | LG INNOTEK INDONESIA PT BEKASI INTERNATIONAL INDUSTRIAL ESTATE BLOK C8 NO. 12-12A DESA CIBATU, CIKARANG | | |

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

| Configurations | SISO | | SDM | CDD |
|----------------|------|------|-------------|-------------|
| | Ant1 | Ant2 | Ant1 + Ant2 | Ant1 + Ant2 |
| 802.11b | O | O | X | O |
| 802.11g | O | O | X | O |
| 802.11n(HT20) | O | O | O | O |
| 802.11n(HT40) | O | O | O | O |

Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

2. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) f) (ii)

$$\bullet \quad \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

▣ Antenna Gain

2.4 GHz Band

| | | |
|--------------------------|----------|----------|
| Antenna Gain | Ant 1 | 1.50 dBi |
| | Ant 2 | 0.82 dBi |
| Directional Antenna Gain | 4.51 dBi | |
| N_{ANT}/N_{SS} | 2/2 | |

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded Uncertainty (\pm dB) |
|------------------------------------------|----------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.82 |
| Radiated Disturbance (9 kHz ~ 30 MHz) | 3.40 |
| Radiated Disturbance (30 MHz ~ 1 GHz) | 4.80 |
| Radiated Disturbance (1 GHz ~ 18 GHz) | 5.70 |
| Radiated Disturbance (18 GHz ~ 40 GHz) | 5.05 |

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

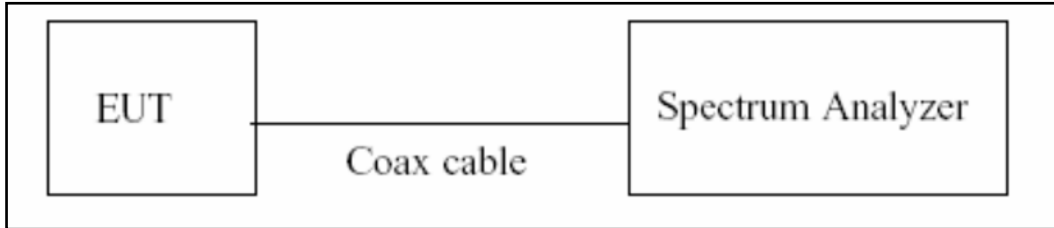

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth & 99 % Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW $\cong 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10.2 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
 - 2) Span = 1.5 times the DTS channel bandwidth.
 - 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
 - 4) $VBW \geq 3 \times RBW$.
 - 5) Sweep = auto couple
 - 6) Detector = peak
 - 7) Trace Mode = max hold
 - 8) Allow trace to fully stabilize.
 - 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

| Freq(MHz) | Factor(dB) |
|-----------|------------|
| 30 | 20.05 |
| 100 | 20.10 |
| 200 | 20.14 |
| 300 | 20.19 |
| 400 | 20.25 |
| 500 | 20.25 |
| 600 | 20.26 |
| 700 | 20.27 |
| 800 | 20.28 |
| 900 | 20.30 |
| 1000 | 20.35 |
| 2000 | 20.50 |
| 2400 | 20.53 |
| 2412 | 20.55 |
| 2437 | 20.55 |
| 2462 | 20.55 |
| 2500 | 20.54 |
| 3000 | 20.64 |
| 4000 | 20.72 |
| 5000 | 20.79 |
| 5700 | 20.80 |
| 5800 | 20.87 |
| 6000 | 20.88 |
| 7000 | 21.01 |
| 8000 | 21.01 |
| 9000 | 21.09 |
| 10000 | 21.19 |
| 11000 | 21.28 |
| 12000 | 21.37 |
| 13000 | 21.38 |
| 14000 | 21.41 |
| 15000 | 21.51 |
| 16000 | 21.59 |
| 17000 | 21.80 |
| 18000 | 21.93 |
| 19000 | 21.85 |
| 20000 | 21.52 |
| 21000 | 21.65 |
| 22000 | 21.64 |
| 23000 | 21.65 |
| 24000 | 21.66 |
| 25000 | 21.76 |

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

7.6. Radiated Test

Limit

FCC

| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30 | 30 | 30 |

ISED


| Frequency (MHz) | Field Strength (uA/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490 | 6.37/F(kHz) | 300 |
| 0.490 – 1.705 | 63.7/F(kHz) | 30 |
| 1.705 – 30 | 0.08 | 30 |

FCC&ISED


| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Test Configuration


Below 30 MHz

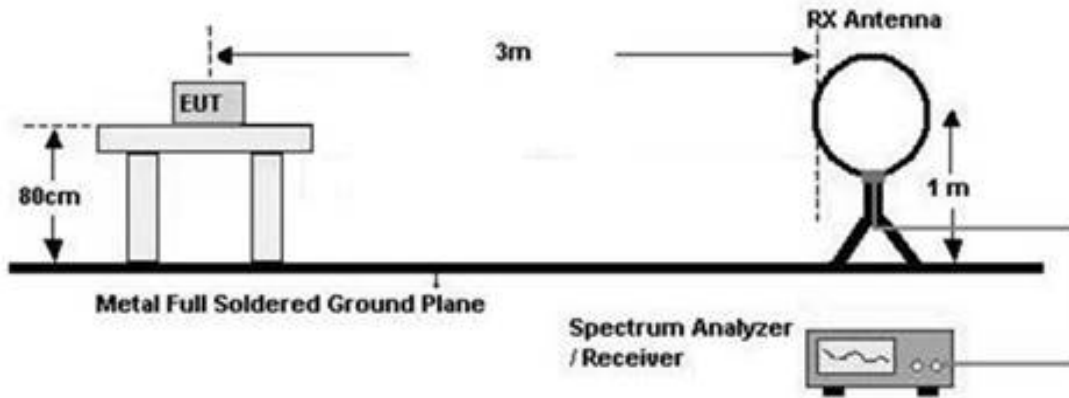

30 MHz - 1 GHz

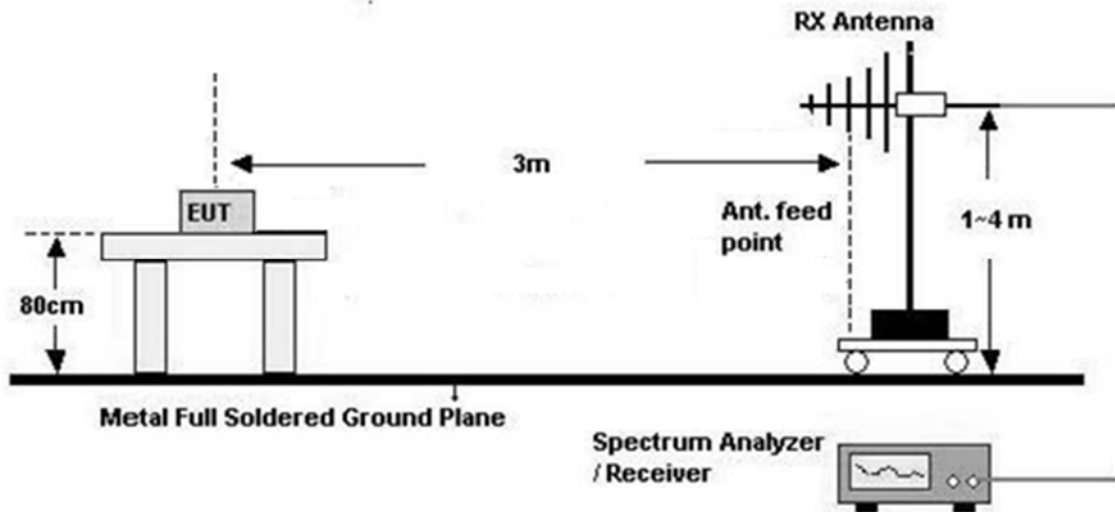

Above 1 GHz

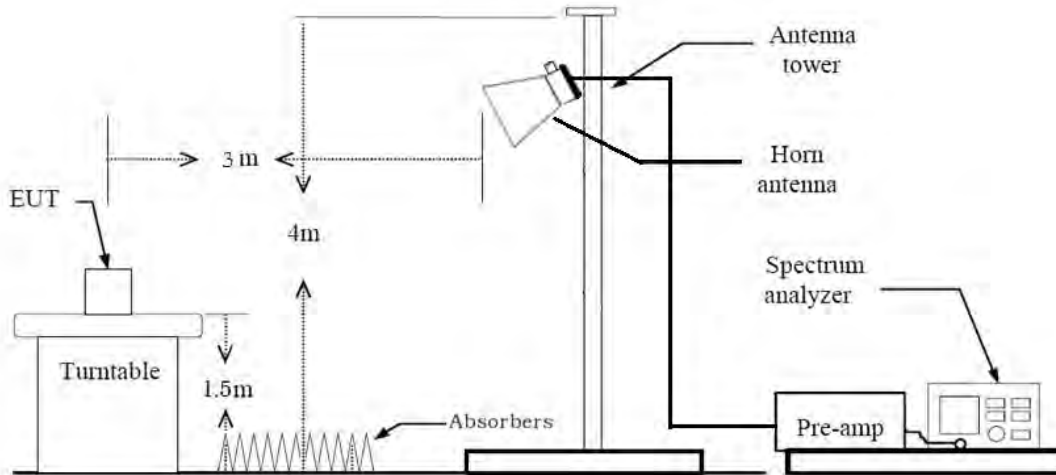

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.

- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW $\geq 3 \times$ RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20 \log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|-------------------------|-------------------------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 ^(a) | 56 to 46 ^(a) |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Receiver Spurious Emissions

Limit


| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

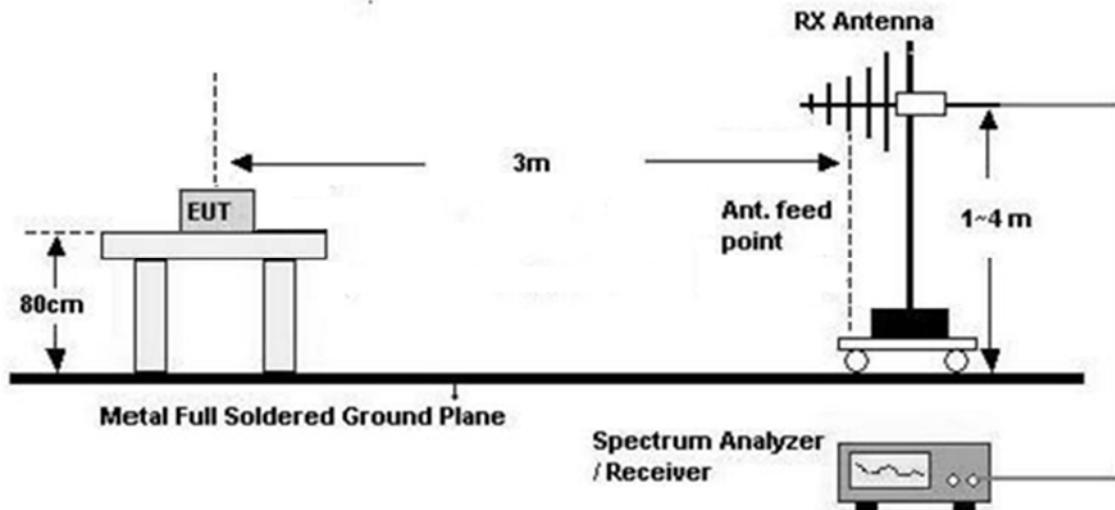

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

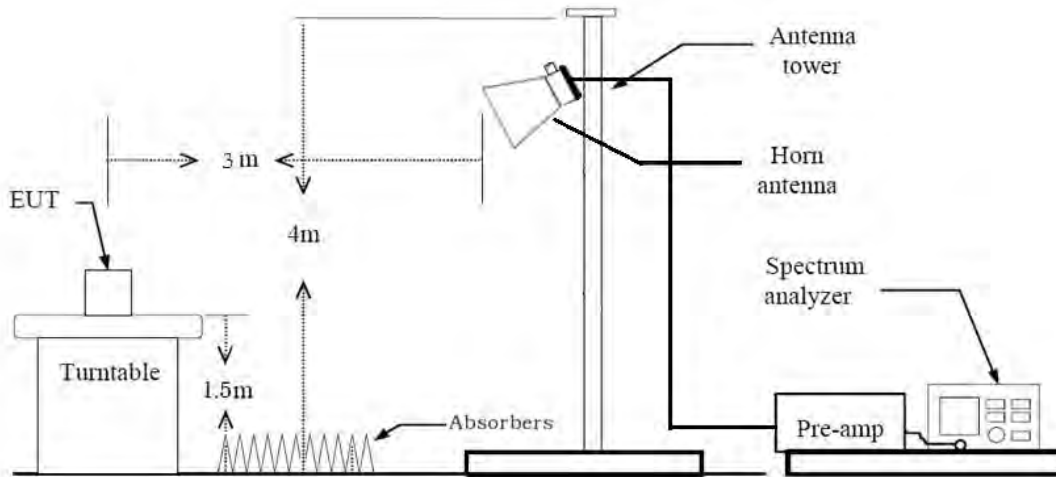

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

7.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD,SDM)
 - Worstcase : Ant1+Ant2(CDD)
3. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
4. Test was performed with continuous Tx.
5. All data rate of operation were investigated and the worst case data rate results are reported
 - 802.11b : 11Mbps
 - 802.11g : 6Mbps
 - 802.11n : MCS0
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used DC.

Conducted test

1. The EUT was configured with data rate of highest power.
2. SISO & MIMO were tested and the all case results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(MIMO)

8. SUMMARY TEST OF RESULTS

FCC Part

| Test Description | FCC Part Section(s) | Test Limit | Test Condition | Test Result |
|-----------------------------------|-----------------------------------|----------------------|----------------|-------------|
| 6 dB Bandwidth | § 15.247(a)(2) | > 500 kHz | Conducted | PASS |
| Conducted Maximum Output Power | § 15.247(b)(3) | < 1 Watt | | PASS |
| Power Spectral Density | § 15.247(e) | < 8 dBm / 3 kHz Band | | PASS |
| Band Edge (Out of Band Emissions) | § 15.247(d) | Conducted > 20 dBc | | PASS |
| AC Power line Conducted Emissions | § 15.207 | cf. Section 7.7 | | N/A(#Note1) |
| Radiated Spurious Emissions | § 15.247(d), 15.205, 15.209 | cf. Section 7.6 | Radiated | PASS |
| Radiated Restricted Band Edge | § 15.247(d), 15.205, 15.209 | cf. Section 7.6 | | PASS |

#Note1 : Not Tested

ISED Part

| Test Description | ISED Part Section(s) | Test Limit | Test Condition | Test Result |
|--------------------------------------------------|----------------------|-------------------------------|----------------|-------------|
| 6 dB Bandwidth | RSS-247, 5.2 | > 500 kHz | Conducted | PASS |
| 99% Bandwidth | RSS-GEN, 6.7 | N/A | | PASS |
| Conducted Maximum Peak Output Power And e.i.r.p. | RSS-247, 5.4. | < 1 Watt <4 Watt(e.i.r.p.) | | PASS |
| Power Spectral Density | RSS-247, 5.2 | < 8 dBm / 3 kHz Band | | PASS |
| Band Edge(Out of Band Emissions) | RSS-247, 5.5 | Conducted > 20 dBc | | PASS |
| AC Power line Conducted Emissions | RSS-GEN, 8.8 | cf. Section 7.7 | | N/A(#Note1) |
| Radiated Spurious Emissions | RSS-GEN, 8.9 | cf. Section 7.6 | | Radiated |
| Receiver Spurious Emissions | RSS-GEN, 7 | cf. Section 7.8 | PASS | |
| Radiated Restricted Band Edge | RSS-GEN, 8.10 | cf. Section 7.6 | PASS | |

#Note1 : Not Tested

9. TEST RESULT

9.1 DUTY CYCLE

| Mode | T _{on} (ms) | T _{total} (ms) | Duty Cycle | Duty Cycle Factor (dB) |
|----------------|-------------------------|----------------------------|------------|------------------------------|
| 802.11b | - | - | - | - |
| 802.11g | - | - | - | - |
| 802.11n (HT20) | - | - | - | - |
| 802.11n (HT40) | - | - | - | - |

Note:

1. Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$. where, Duty Cycle = T_{on} / T_{total}
2. Test was performed with continuous Tx.

9.2 6dB BANDWIDTH & 99 % BANDWIDTH

FCC

[ANT 1]

| 802.11b Mode | | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|--------------------------|-------------------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 10.156 | > 0.5 |
| 2437 | 6 | 10.228 | > 0.5 |
| 2462 | 11 | 10.233 | > 0.5 |
| 2467 | 12 | 10.230 | > 0.5 |
| 2472 | 13 | 10.230 | > 0.5 |

| 802.11g Mode | | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|--------------------------|-------------------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 16.443 | > 0.5 |
| 2437 | 6 | 16.447 | > 0.5 |
| 2462 | 11 | 16.438 | > 0.5 |
| 2467 | 12 | 16.442 | > 0.5 |
| 2472 | 13 | 16.526 | > 0.5 |

| 802.11n(HT20) Mode | | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|--------------------|-------------|--------------------------|-------------------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 17.641 | > 0.5 |
| 2437 | 6 | 17.661 | > 0.5 |
| 2462 | 11 | 17.640 | > 0.5 |
| 2467 | 12 | 17.650 | > 0.5 |
| 2472 | 13 | 17.692 | > 0.5 |

| 802.11n(HT40) Mode | | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|--------------------|-------------|--------------------------|-------------------------|
| Frequency [MHz] | Channel No. | | |
| 2422 | 3 | 36.470 | > 0.5 |
| 2437 | 6 | 36.467 | > 0.5 |
| 2452 | 9 | 36.463 | > 0.5 |

[ANT 2]

| 802.11b Mode | | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|--------------------------|-------------------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 10.226 | > 0.5 |
| 2437 | 6 | 10.225 | > 0.5 |
| 2462 | 11 | 10.226 | > 0.5 |
| 2467 | 12 | 10.224 | > 0.5 |
| 2472 | 13 | 10.220 | > 0.5 |

| 802.11g Mode | | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|--------------------------|-------------------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 16.439 | > 0.5 |
| 2437 | 6 | 16.441 | > 0.5 |
| 2462 | 11 | 16.442 | > 0.5 |
| 2467 | 12 | 16.437 | > 0.5 |
| 2472 | 13 | 16.475 | > 0.5 |


| 802.11n(HT20) Mode | | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|--------------------|-------------|--------------------------|-------------------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 17.652 | > 0.5 |
| 2437 | 6 | 17.654 | > 0.5 |
| 2462 | 11 | 17.638 | > 0.5 |
| 2467 | 12 | 17.640 | > 0.5 |
| 2472 | 13 | 17.708 | > 0.5 |

| 802.11n(HT40) Mode | | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|--------------------|-------------|--------------------------|-------------------------|
| Frequency [MHz] | Channel No. | | |
| 2422 | 3 | 36.458 | > 0.5 |
| 2437 | 6 | 36.462 | > 0.5 |
| 2452 | 9 | 36.409 | > 0.5 |


[ANT 1]

▣ Test Plots

6dB Bandwidth plot (802.11b-CH 1)

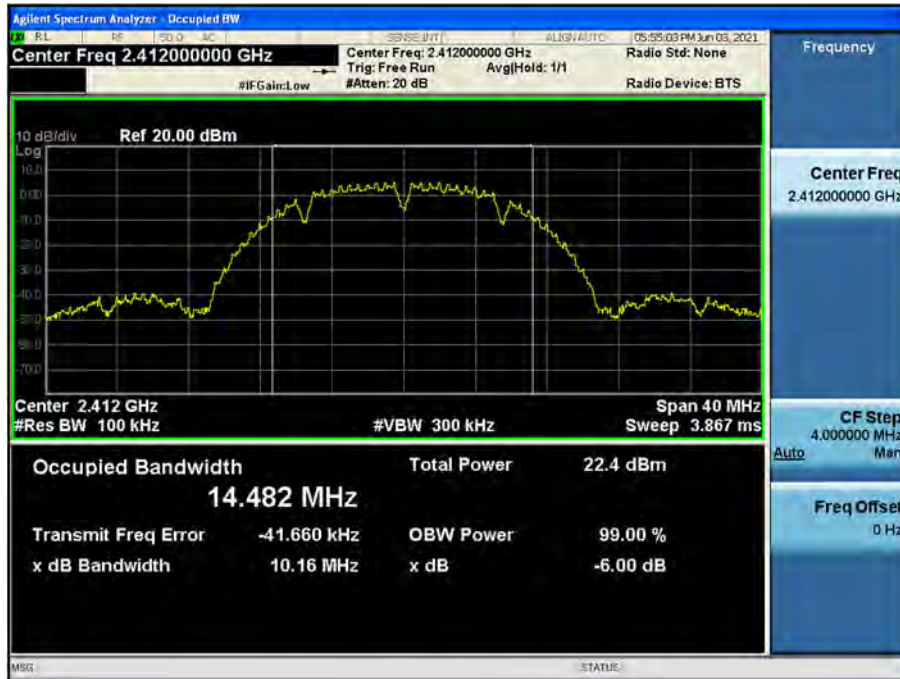

6dB Bandwidth plot (802.11g-CH 11)

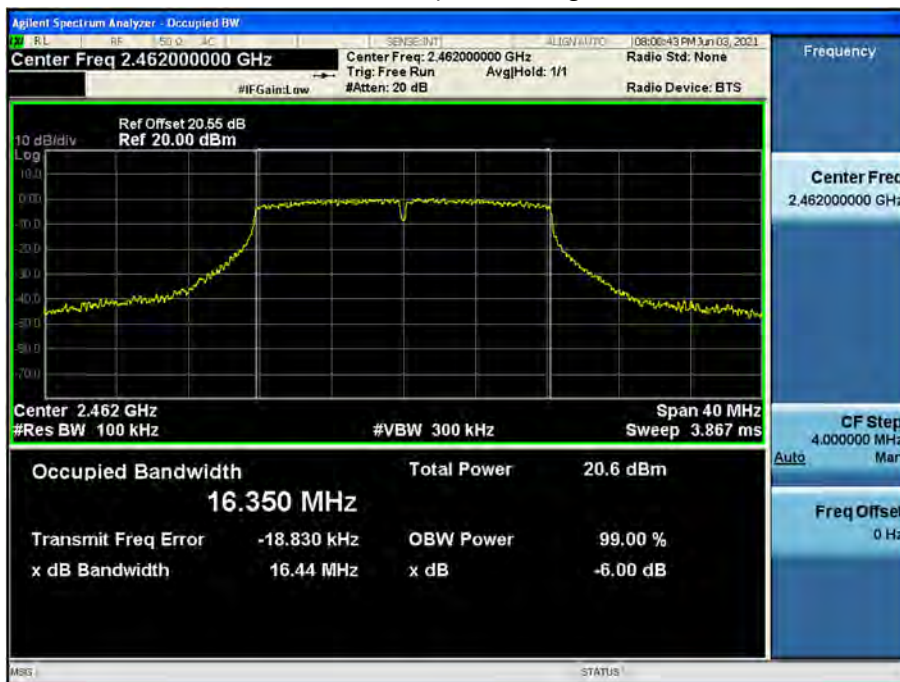

6dB Bandwidth plot (802.11n_HT20-CH 11)



6dB Bandwidth plot (802.11n_HT40-CH 9)




Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

[ANT 2]

▣ Test Plots

6dB Bandwidth plot (802.11b-CH 13)

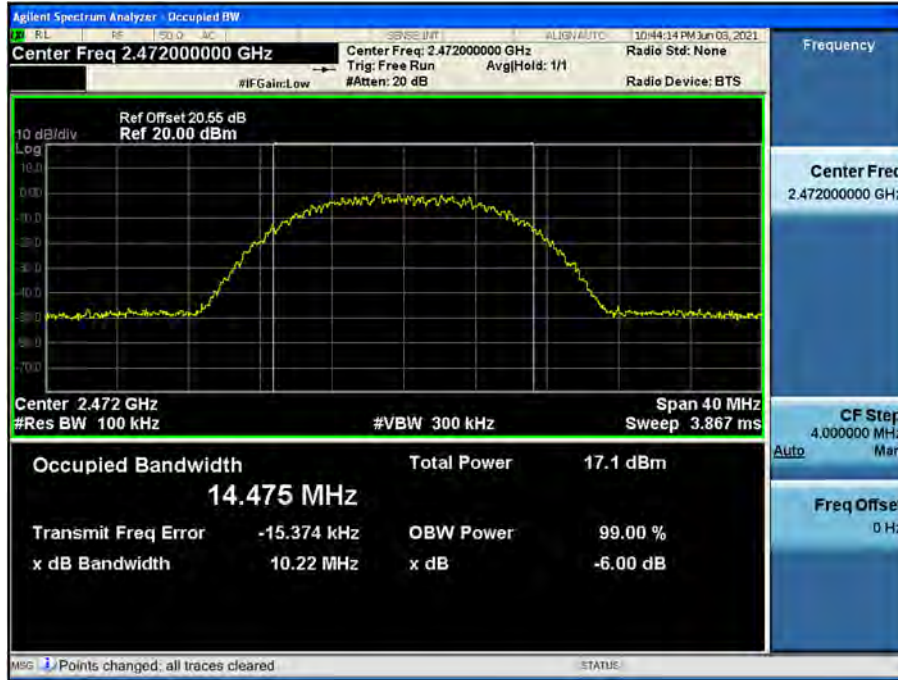


6dB Bandwidth plot (802.11g-CH 12)



6dB Bandwidth plot (802.11n_HT20-CH 11)



6dB Bandwidth plot (802.11n_HT40-CH 9)

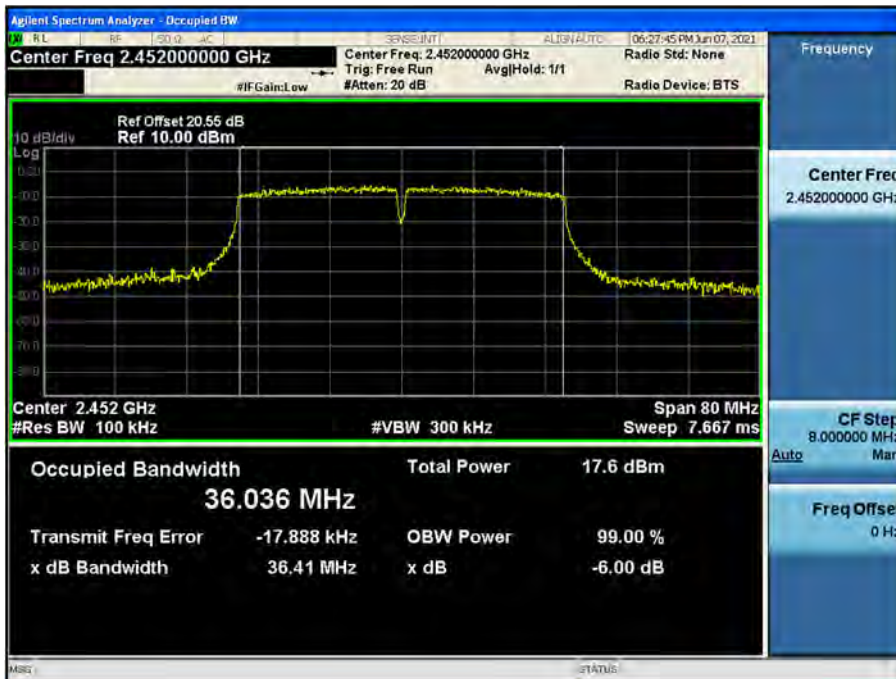

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

99% Bandwidth Measurements(ISED)

[ANT 1]

| 802.11b Mode | | OBW Bandwidth [MHz] | Limit [MHz] |
|-----------------|-------------|---------------------|-------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 14.497 | N/A |
| 2437 | 6 | 14.437 | N/A |
| 2462 | 11 | 14.426 | N/A |
| 2467 | 12 | 14.421 | N/A |
| 2472 | 13 | 14.423 | N/A |

| 802.11g Mode | | OBW Bandwidth [MHz] | Limit [MHz] |
|-----------------|-------------|---------------------|-------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 16.691 | N/A |
| 2437 | 6 | 16.677 | N/A |
| 2462 | 11 | 16.679 | N/A |
| 2467 | 12 | 16.871 | N/A |
| 2472 | 13 | 16.459 | N/A |

| 802.11n(HT20) Mode | | OBW Bandwidth [MHz] | Limit [MHz] |
|--------------------|-------------|---------------------|-------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 17.793 | N/A |
| 2437 | 6 | 17.791 | N/A |
| 2462 | 11 | 17.785 | N/A |
| 2467 | 12 | 17.783 | N/A |
| 2472 | 13 | 17.587 | N/A |

| 802.11n(HT40) Mode | | OBW Bandwidth [MHz] | Limit [MHz] |
|--------------------|-------------|---------------------|-------------|
| Frequency [MHz] | Channel No. | | |
| 2422 | 3 | 36.051 | N/A |
| 2437 | 6 | 36.051 | N/A |
| 2452 | 9 | 36.056 | N/A |

[ANT 2]

| 802.11b Mode | | OBW Bandwidth [MHz] | Limit [MHz] |
|-----------------|-------------|---------------------|-------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 14.400 | N/A |
| 2437 | 6 | 14.426 | N/A |
| 2462 | 11 | 14.409 | N/A |
| 2467 | 12 | 14.430 | N/A |
| 2472 | 13 | 14.422 | N/A |

| 802.11g Mode | | OBW Bandwidth [MHz] | Limit [MHz] |
|-----------------|-------------|---------------------|-------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 16.540 | N/A |
| 2437 | 6 | 16.556 | N/A |
| 2462 | 11 | 16.551 | N/A |
| 2467 | 12 | 16.529 | N/A |
| 2472 | 13 | 16.417 | N/A |

| 802.11n(HT20) Mode | | OBW Bandwidth [MHz] | Limit [MHz] |
|--------------------|-------------|---------------------|-------------|
| Frequency [MHz] | Channel No. | | |
| 2412 | 1 | 17.777 | N/A |
| 2437 | 6 | 17.808 | N/A |
| 2462 | 11 | 17.802 | N/A |
| 2467 | 12 | 17.790 | N/A |
| 2472 | 13 | 17.584 | N/A |

| 802.11n(HT40) Mode | | OBW Bandwidth [MHz] | Limit [MHz] |
|--------------------|-------------|---------------------|-------------|
| Frequency [MHz] | Channel No. | | |
| 2422 | 3 | 36.048 | N/A |
| 2437 | 6 | 36.058 | N/A |
| 2452 | 9 | 36.063 | N/A |

▣ Test Plots_[ANT 1]

99% Bandwidth plot (802.11b-CH 1)



99% Bandwidth plot (802.11g-CH 12)



99% Bandwidth plot (802.11n_HT20-CH 1)



99% Bandwidth plot (802.11n_HT40-CH 9)



Note:

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

▣ Test Plots_[ANT 2]

99% Bandwidth plot (802.11b-CH 12)



99% Bandwidth plot (802.11g-CH 6)



99% Bandwidth plot (802.11n_HT20-CH 6)



99% Bandwidth plot (802.11n_HT40-CH 9)



Note:

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss+ Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.55 dB is offset for 2.4 GHz Band

| 802.11b Mode | | Worstcase Datarate (Mbps) | SISO Measured Power | | | | | | MIMO (CDD) | | Limit (dBm) |
|-----------------|-------------|---------------------------|---------------------|-------------|-------|-------------|-------------|-------|------------|-------|-------------|
| Frequency [MHz] | Channel No. | | Ant 1 (dBm) | Limit (dBm) | PLS | Ant 2 (dBm) | Limit (dBm) | PLS | mW | dBm | |
| 2412 | 1 | 11 Mbps | 19.83 | 30.00 | 70.00 | 19.20 | 30.00 | 86.00 | 179.29 | 22.54 | 30.00 |
| 2437 | 6 | 11 Mbps | 19.59 | 30.00 | 71.00 | 19.15 | 30.00 | 87.00 | 173.24 | 22.39 | 30.00 |
| 2462 | 11 | 11 Mbps | 19.57 | 30.00 | 71.00 | 18.83 | 30.00 | 87.00 | 166.89 | 22.22 | 30.00 |
| 2467 | 12 | 11 Mbps | 19.18 | 30.00 | 70.00 | 18.52 | 30.00 | 86.00 | 153.86 | 21.87 | 30.00 |
| 2472 | 13 | 11 Mbps | 15.60 | 30.00 | 54.00 | 14.88 | 30.00 | 70.00 | 67.04 | 18.26 | 30.00 |

| 802.11g Mode | | Worstcase Datarate (Mbps) | SISO Measured Power | | | | | | MIMO (CDD) | | Limit (dBm) |
|-----------------|-------------|---------------------------|---------------------|-------------|-------|-------------|-------------|-------|------------|-------|-------------|
| Frequency [MHz] | Channel No. | | Ant 1 (dBm) | Limit (dBm) | PLS | Ant 2 (dBm) | Limit (dBm) | PLS | mW | dBm | |
| 2412 | 1 | 6 Mbps | 22.21 | 30.00 | 60.00 | 22.28 | 30.00 | 76.00 | 335.57 | 25.26 | 30.00 |
| 2437 | 6 | 6 Mbps | 21.72 | 30.00 | 62.00 | 21.93 | 30.00 | 78.00 | 304.41 | 24.83 | 30.00 |
| 2462 | 11 | 6 Mbps | 21.77 | 30.00 | 63.00 | 21.64 | 30.00 | 79.00 | 296.00 | 24.71 | 30.00 |
| 2467 | 12 | 6 Mbps | 15.94 | 30.00 | 42.00 | 16.54 | 30.00 | 58.00 | 84.29 | 19.26 | 30.00 |
| 2472 | 13 | 6 Mbps | 13.63 | 30.00 | 30.00 | 14.08 | 30.00 | 46.00 | 48.65 | 16.87 | 30.00 |

| 802.11n(HT20) Mode | | Worstcase Datarate (Mbps) | SISO Measured Power | | | | | | MIMO (CDD) | | Limit (dBm) |
|--------------------|----------------|---------------------------------|---------------------|----------------|-------|----------------|----------------|-------|------------|-------|----------------|
| Frequency [MHz] | Channel No. | | Ant 1 (dBm) | Limit (dBm) | PLS | Ant 2 (dBm) | Limit (dBm) | PLS | mW | dBm | |
| 2412 | 1 | 6.5 Mbps | 21.79 | 30.00 | 60.00 | 21.89 | 30.00 | 76.00 | 305.60 | 24.85 | 30.00 |
| 2437 | 6 | 6.5 Mbps | 21.70 | 30.00 | 63.00 | 21.71 | 30.00 | 79.00 | 295.95 | 24.71 | 30.00 |
| 2462 | 11 | 6.5 Mbps | 21.82 | 30.00 | 63.00 | 21.75 | 30.00 | 79.00 | 301.78 | 24.80 | 30.00 |
| 2467 | 12 | 6.5 Mbps | 15.54 | 30.00 | 41.00 | 15.76 | 30.00 | 57.00 | 73.50 | 18.66 | 30.00 |
| 2472 | 13 | 6.5 Mbps | 13.52 | 30.00 | 30.00 | 13.55 | 30.00 | 46.00 | 45.13 | 16.54 | 30.00 |

| 802.11n(HT40) Mode | | Worstcase Datarate (Mbps) | SISO Measured Power | | | | | | MIMO (CDD) | | Limit (dBm) |
|--------------------|----------------|---------------------------------|---------------------|----------------|-------|----------------|----------------|-------|------------|-------|----------------|
| Frequency [MHz] | Channel No. | | Ant 1 (dBm) | Limit (dBm) | PLS | Ant 2 (dBm) | Limit (dBm) | PLS | mW | dBm | |
| 2422 | 3 | 13.5 Mbps | 20.60 | 30.00 | 53.00 | 20.17 | 30.00 | 69.00 | 218.71 | 23.40 | 30.00 |
| 2437 | 6 | 13.5 Mbps | 21.81 | 30.00 | 61.00 | 21.29 | 30.00 | 77.00 | 286.21 | 24.57 | 30.00 |
| 2452 | 9 | 13.5 Mbps | 19.70 | 30.00 | 54.00 | 19.49 | 30.00 | 70.00 | 182.16 | 22.60 | 30.00 |

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.55 dB is offset for 2.4 GHz Band.

| 802.11b Mode | | Worstcase Datarate (Mbps) | SISO Measured Power | | | | | | MIMO (CDD) | | Limit (dBm) |
|--------------------|----------------|---------------------------------|---------------------|----------------|-------|----------------|----------------|-------|------------|-------|----------------|
| Frequency [MHz] | Channel No. | | Ant 1 (dBm) | Limit (dBm) | PLS | Ant 2 (dBm) | Limit (dBm) | PLS | mW | dBm | |
| 2412 | 1 | 11 Mbps | 14.21 | 30.00 | 70.00 | 13.63 | 30.00 | 86.00 | 49.39 | 16.94 | 30.00 |
| 2437 | 6 | 11 Mbps | 14.05 | 30.00 | 71.00 | 13.60 | 30.00 | 87.00 | 48.32 | 16.84 | 30.00 |
| 2462 | 11 | 11 Mbps | 14.27 | 30.00 | 71.00 | 13.31 | 30.00 | 87.00 | 48.17 | 16.83 | 30.00 |
| 2467 | 12 | 11 Mbps | 13.57 | 30.00 | 70.00 | 13.18 | 30.00 | 86.00 | 43.56 | 16.39 | 30.00 |
| 2472 | 13 | 11 Mbps | 10.01 | 30.00 | 54.00 | 9.20 | 30.00 | 70.00 | 18.34 | 12.63 | 30.00 |

| 802.11g Mode | | Worstcase Datarate (Mbps) | SISO Measured Power | | | | | | MIMO (CDD) | | Limit (dBm) |
|--------------------|----------------|---------------------------------|---------------------|----------------|-------|----------------|----------------|-------|------------|-------|----------------|
| Frequency [MHz] | Channel No. | | Ant 1 (dBm) | Limit (dBm) | PLS | Ant 2 (dBm) | Limit (dBm) | PLS | mW | dBm | |
| 2412 | 1 | 6 Mbps | 14.42 | 30.00 | 60.00 | 14.37 | 30.00 | 76.00 | 55.01 | 17.40 | 30.00 |
| 2437 | 6 | 6 Mbps | 14.02 | 30.00 | 62.00 | 14.02 | 30.00 | 78.00 | 50.51 | 17.03 | 30.00 |
| 2462 | 11 | 6 Mbps | 14.15 | 30.00 | 63.00 | 13.79 | 30.00 | 79.00 | 49.92 | 16.98 | 30.00 |
| 2467 | 12 | 6 Mbps | 8.19 | 30.00 | 42.00 | 8.72 | 30.00 | 58.00 | 14.04 | 11.48 | 30.00 |
| 2472 | 13 | 6 Mbps | 6.00 | 30.00 | 30.00 | 6.28 | 30.00 | 46.00 | 8.23 | 9.15 | 30.00 |

| 802.11n(HT20) Mode | | Worstcase Datarate (Mbps) | SISO Measured Power | | | | | | MIMO (CDD) | | Limit (dBm) |
|--------------------|----------------|---------------------------------|---------------------|----------------|-------|----------------|----------------|-------|------------|-------|----------------|
| Frequency [MHz] | Channel No. | | Ant 1 (dBm) | Limit (dBm) | PLS | Ant 2 (dBm) | Limit (dBm) | PLS | mW | dBm | |
| 2412 | 1 | 6.5 Mbps | 13.82 | 30.00 | 60.00 | 13.98 | 30.00 | 76.00 | 49.14 | 16.91 | 30.00 |
| 2437 | 6 | 6.5 Mbps | 13.76 | 30.00 | 63.00 | 13.77 | 30.00 | 79.00 | 47.59 | 16.77 | 30.00 |
| 2462 | 11 | 6.5 Mbps | 13.86 | 30.00 | 63.00 | 13.58 | 30.00 | 79.00 | 47.10 | 16.73 | 30.00 |
| 2467 | 12 | 6.5 Mbps | 7.72 | 30.00 | 41.00 | 7.79 | 30.00 | 57.00 | 11.93 | 10.77 | 30.00 |
| 2472 | 13 | 6.5 Mbps | 5.74 | 30.00 | 30.00 | 5.62 | 30.00 | 46.00 | 7.39 | 8.69 | 30.00 |

| 802.11n(HT40) Mode | | Worstcase Datarate (Mbps) | SISO Measured Power | | | | | | MIMO (CDD) | | Limit (dBm) |
|--------------------|----------------|---------------------------------|---------------------|----------------|-------|----------------|----------------|-------|------------|-------|----------------|
| Frequency [MHz] | Channel No. | | Ant 1 (dBm) | Limit (dBm) | PLS | Ant 2 (dBm) | Limit (dBm) | PLS | mW | dBm | |
| 2422 | 3 | 13.5 Mbps | 12.70 | 30.00 | 53.00 | 12.06 | 30.00 | 69.00 | 34.71 | 15.40 | 30.00 |
| 2437 | 6 | 13.5 Mbps | 13.98 | 30.00 | 61.00 | 13.46 | 30.00 | 77.00 | 47.19 | 16.74 | 30.00 |
| 2452 | 9 | 13.5 Mbps | 11.88 | 30.00 | 54.00 | 11.58 | 30.00 | 70.00 | 29.81 | 14.74 | 30.00 |

9.4 POWER SPECTRAL DENSITY

[Ant.1]

| Mode | Frequency (MHz) | Channel No. | Test Result | |
|---------------|-----------------|-------------|--------------------------|-------------------|
| | | | Measured PSD (dBm/3 kHz) | Limit (dBm/3 kHz) |
| 802.11b | 2412 | 1 | -9.314 | 8 |
| | 2437 | 6 | -9.394 | |
| | 2462 | 11 | -9.274 | |
| | 2467 | 12 | -9.915 | |
| | 2472 | 13 | -13.486 | |
| 802.11g | 2412 | 1 | -13.574 | |
| | 2437 | 6 | -14.092 | |
| | 2462 | 11 | -13.786 | |
| | 2467 | 12 | -20.076 | |
| | 2472 | 13 | -22.439 | |
| 802.11n(HT20) | 2412 | 1 | -14.109 | |
| | 2437 | 6 | -13.781 | |
| | 2462 | 11 | -13.219 | |
| | 2467 | 12 | -19.610 | |
| | 2472 | 13 | -21.582 | |
| 802.11n(HT40) | 2422 | 3 | -15.823 | |
| | 2437 | 6 | -15.071 | |
| | 2452 | 9 | -17.108 | |

[Ant.2]

| Mode | Frequency (MHz) | Channel No. | Test Result | |
|---------------|-----------------|-------------|--------------------------|-------------------|
| | | | Measured PSD (dBm/3 kHz) | Limit (dBm/3 kHz) |
| 802.11b | 2412 | 1 | -9.611 | 8 |
| | 2437 | 6 | -9.967 | |
| | 2462 | 11 | -9.912 | |
| | 2467 | 12 | -10.317 | |
| | 2472 | 13 | -14.414 | |
| 802.11g | 2412 | 1 | -13.934 | |
| | 2437 | 6 | -14.315 | |
| | 2462 | 11 | -14.407 | |
| | 2467 | 12 | -19.562 | |
| | 2472 | 13 | -22.246 | |
| 802.11n(HT20) | 2412 | 1 | -13.483 | |
| | 2437 | 6 | -13.768 | |
| | 2462 | 11 | -13.776 | |
| | 2467 | 12 | -19.473 | |
| | 2472 | 13 | -21.711 | |
| 802.11n(HT40) | 2422 | 3 | -17.560 | |
| | 2437 | 6 | -15.940 | |
| | 2452 | 9 | -17.243 | |

[MIMO]

| Mode | Frequency (MHz) | Channel No. | Test Result | | | |
|---------------|-----------------|-------------|----------------------------------|----------------------------------|----------------------------------|-------------------|
| | | | Ant 1 Measured Power (dBm/3 kHz) | Ant 2 Measured Power (dBm/3 kHz) | MIMO (Ant 1 + Ant 2) (dBm/3 kHz) | Limit (dBm/3 kHz) |
| 802.11b | 2412 | 1 | -9.314 | -9.611 | -6.383 | 8 |
| | 2437 | 6 | -9.394 | -9.967 | -6.778 | |
| | 2462 | 11 | -9.274 | -9.912 | -6.576 | |
| | 2467 | 12 | -9.915 | -10.317 | -7.212 | |
| | 2472 | 13 | -13.486 | -14.414 | -10.969 | |
| 802.11g | 2412 | 1 | -13.574 | -13.934 | -10.969 | |
| | 2437 | 6 | -14.092 | -14.315 | -10.969 | |
| | 2462 | 11 | -13.786 | -14.407 | -10.969 | |
| | 2467 | 12 | -20.076 | -19.562 | -16.990 | |
| | 2472 | 13 | -22.439 | -22.246 | -16.990 | |
| 802.11n(HT20) | 2412 | 1 | -14.109 | -13.483 | -10.969 | |
| | 2437 | 6 | -13.781 | -13.768 | -10.969 | |
| | 2462 | 11 | -13.219 | -13.776 | -10.458 | |
| | 2467 | 12 | -19.610 | -19.473 | -16.990 | |
| | 2472 | 13 | -21.582 | -21.711 | -16.990 | |
| 802.11n(HT40) | 2422 | 3 | -15.823 | -17.560 | -13.010 | |
| | 2437 | 6 | -15.071 | -15.940 | -12.218 | |
| | 2452 | 9 | -17.108 | -17.243 | -13.979 | |

Note :

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.


2. Spectrum offset = Attenuator loss(20 dB) + Cable loss(1ea)

3. 20.55 dB is offset for 2.4 GHz Band.


[Ant1]

▣ Test Plots


Power Spectral Density (802.11b-CH 11)

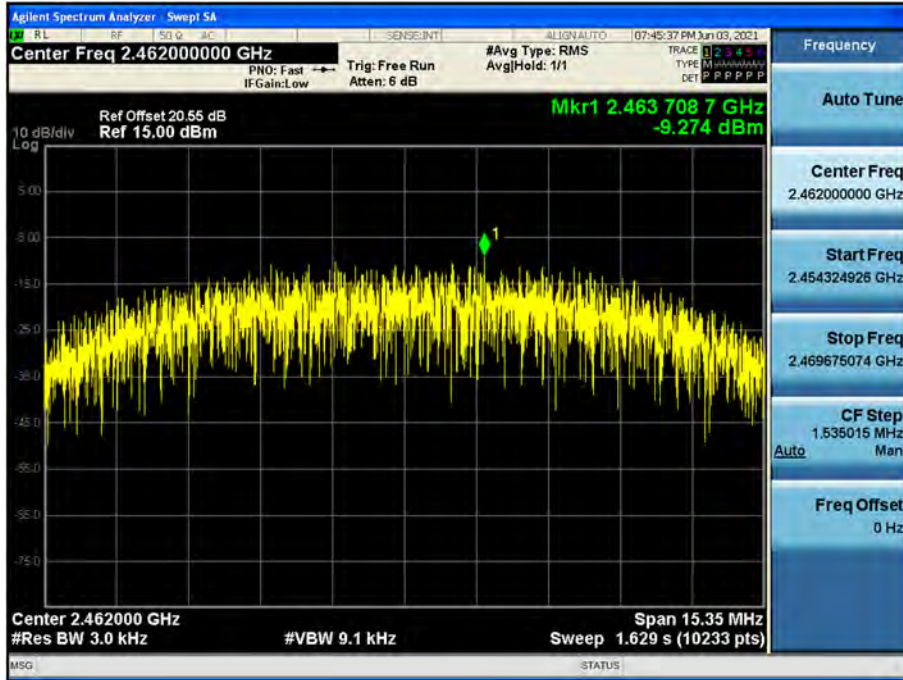


Power Spectral Density (802.11g-CH 1)

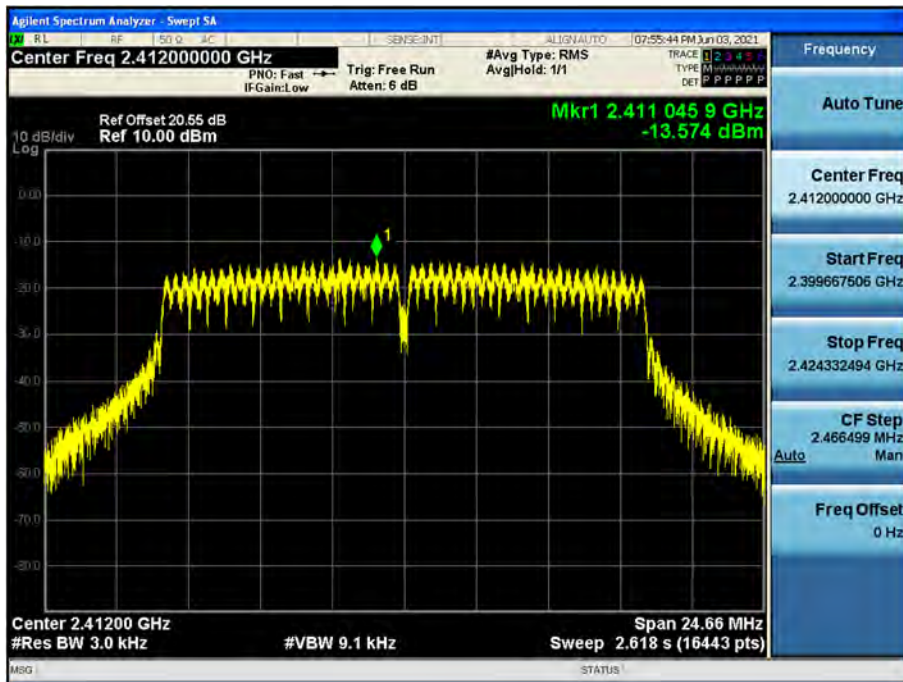

Power Spectral Density (802.11n_HT20 -CH 11)

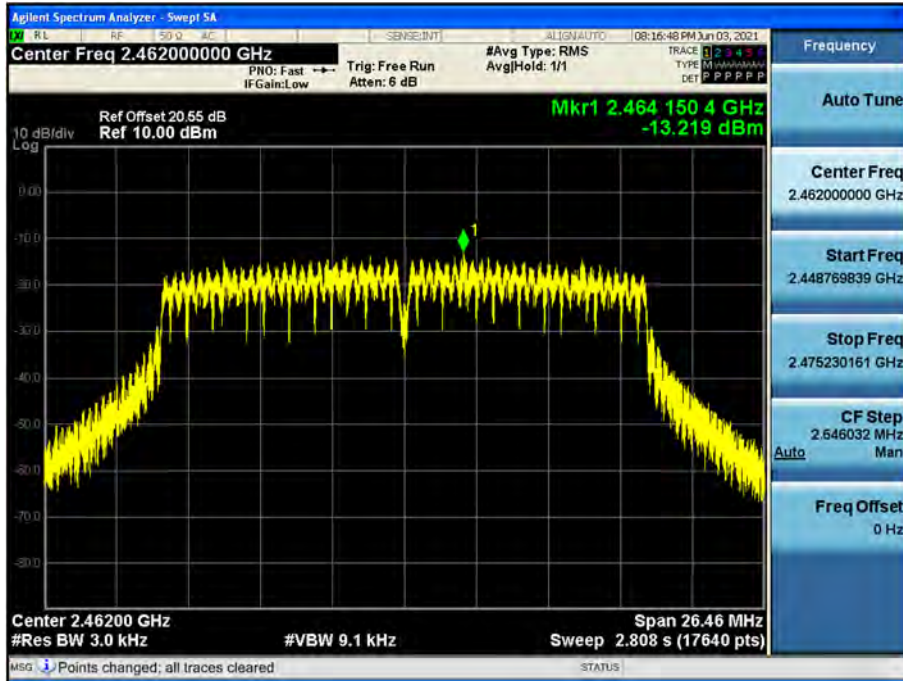

Power Spectral Density (802.11n_HT40 -CH 6)

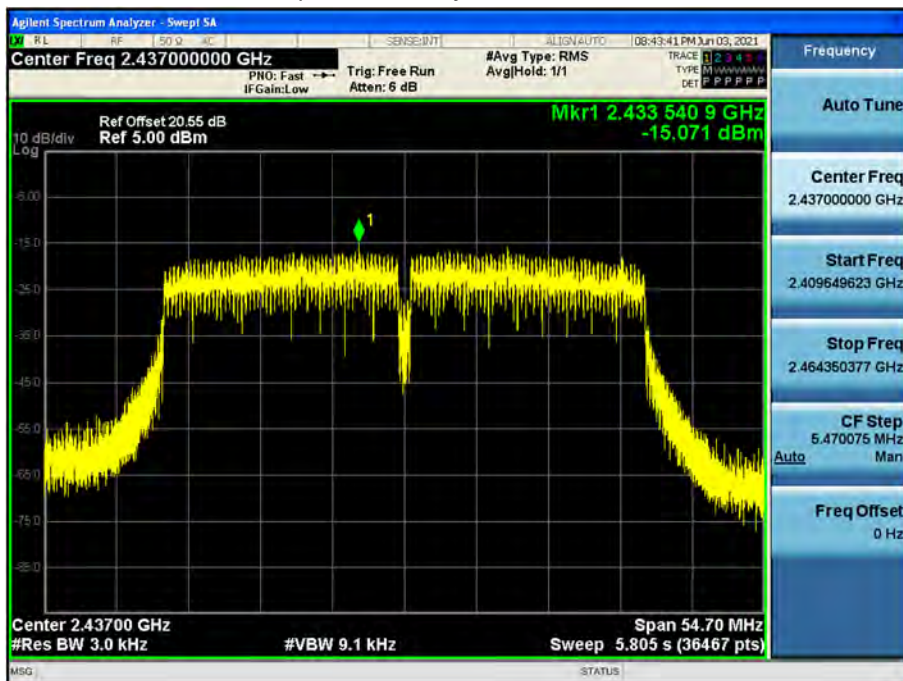


Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.


[Ant2]

▣ Test Plots


Power Spectral Density (802.11b-CH 1)

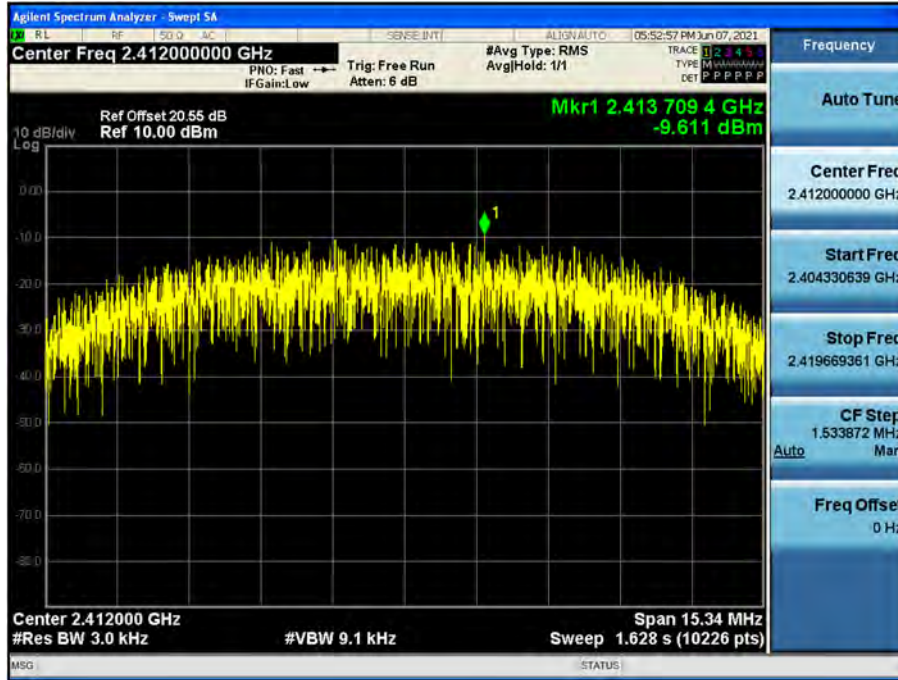


Power Spectral Density (802.11g-CH 1)

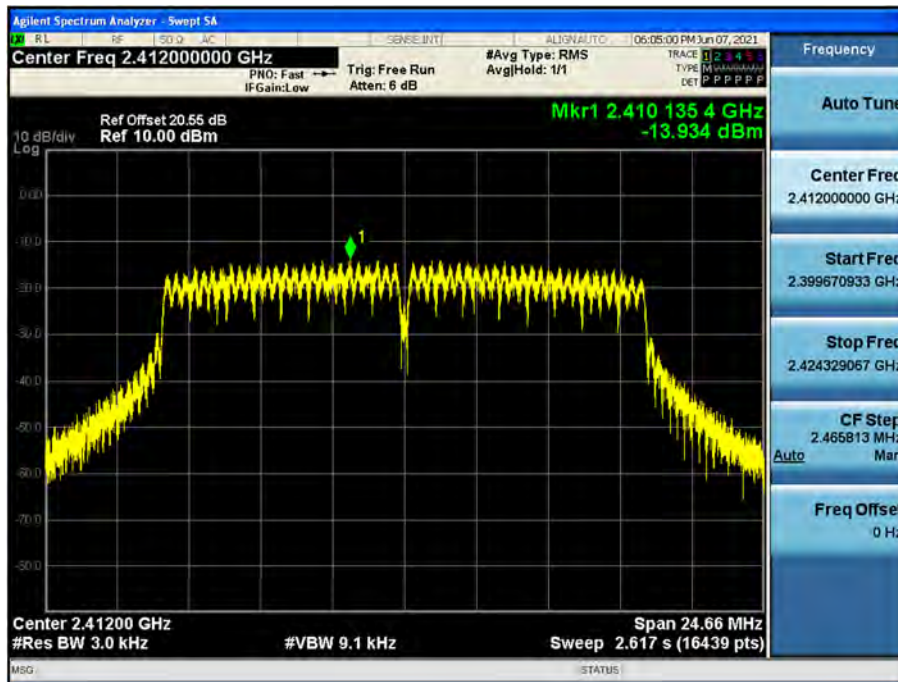

Power Spectral Density (802.11n_HT20 -CH 1)

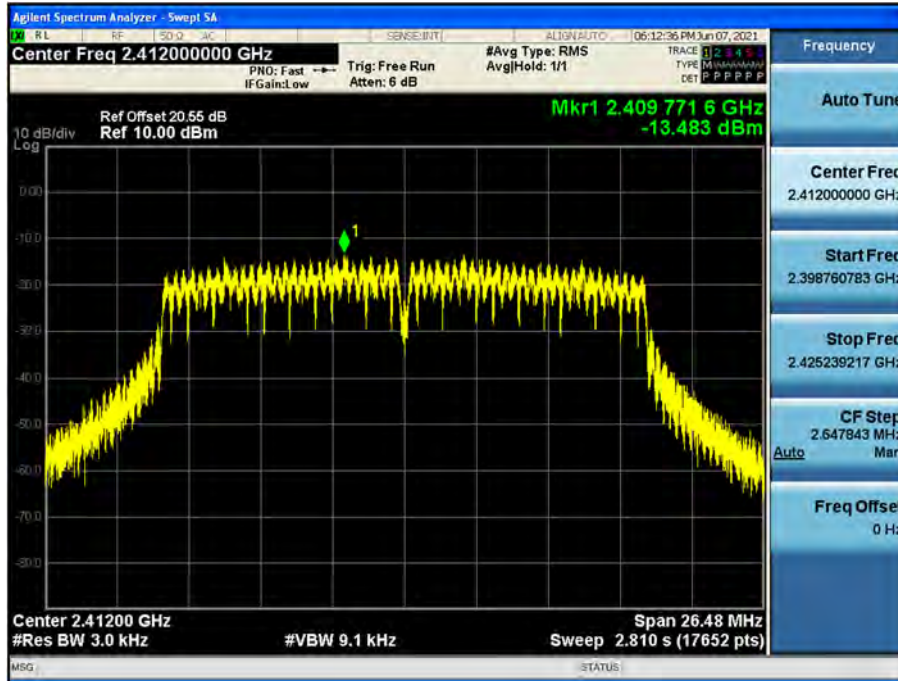

Power Spectral Density (802.11n_HT40 -CH 6)

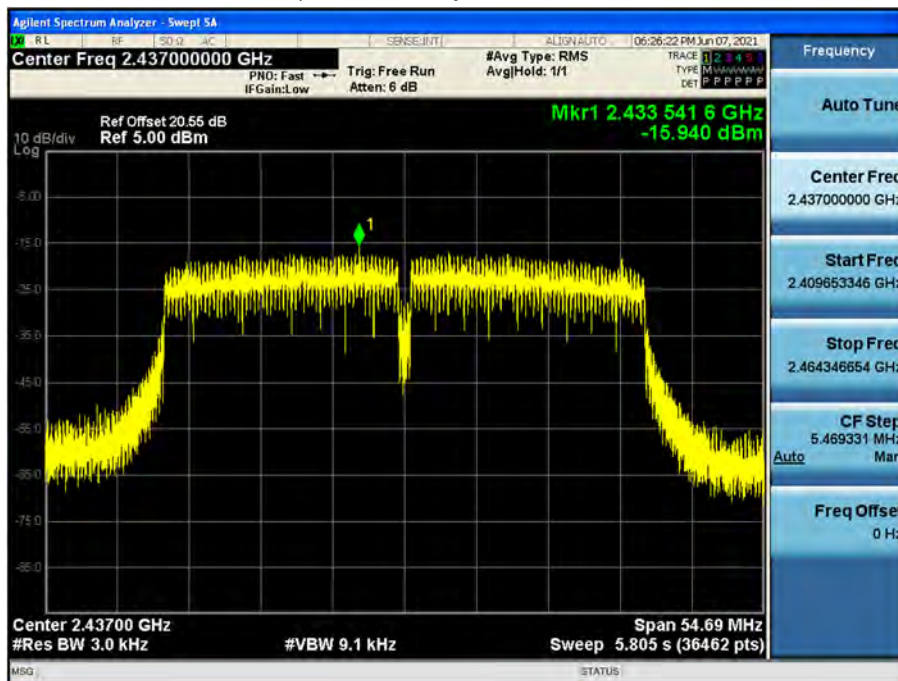

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

[ANT1]

☐ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

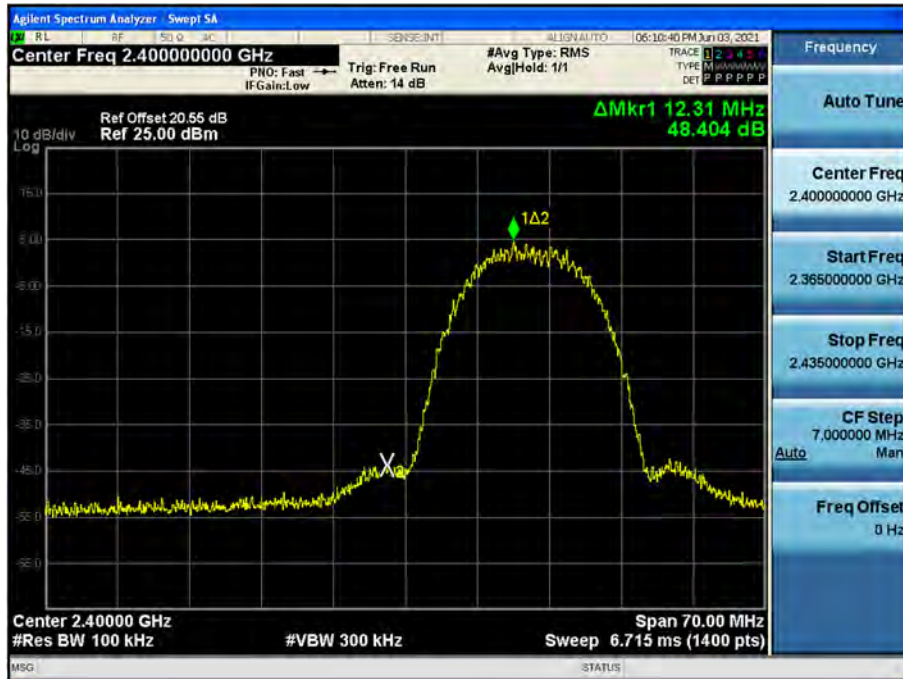

Band Edge (802.11b-CH11)



Band Edge (802.11b-CH12)

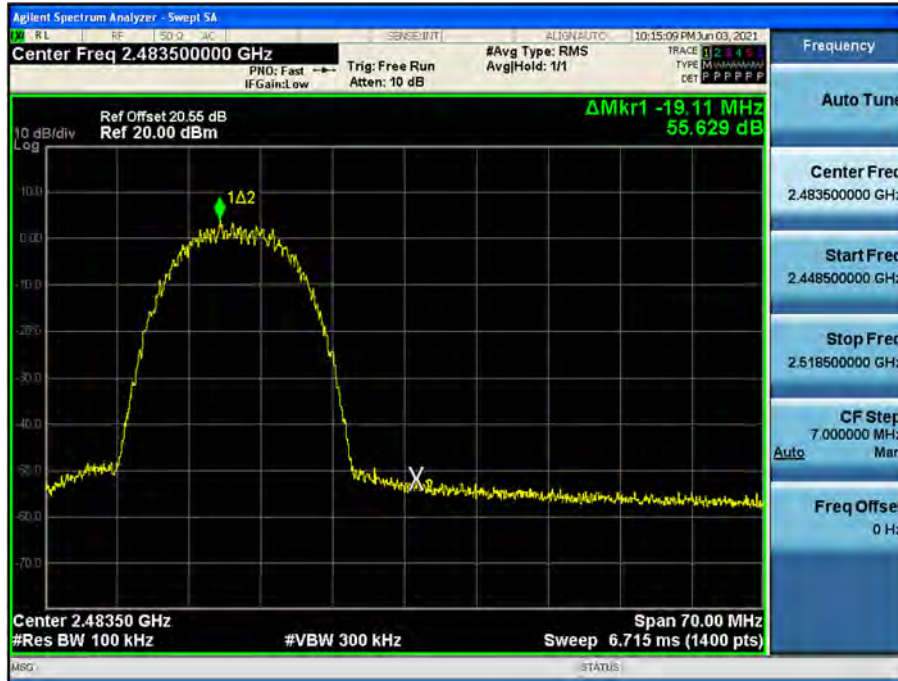

Band Edge (802.11b-CH13)



Band Edge (802.11g-CH1)



Band Edge (802.11g-CH11)




Band Edge (802.11g-CH12)



Band Edge (802.11g-CH13)



Band Edge (802.11n_HT20 -CH1)

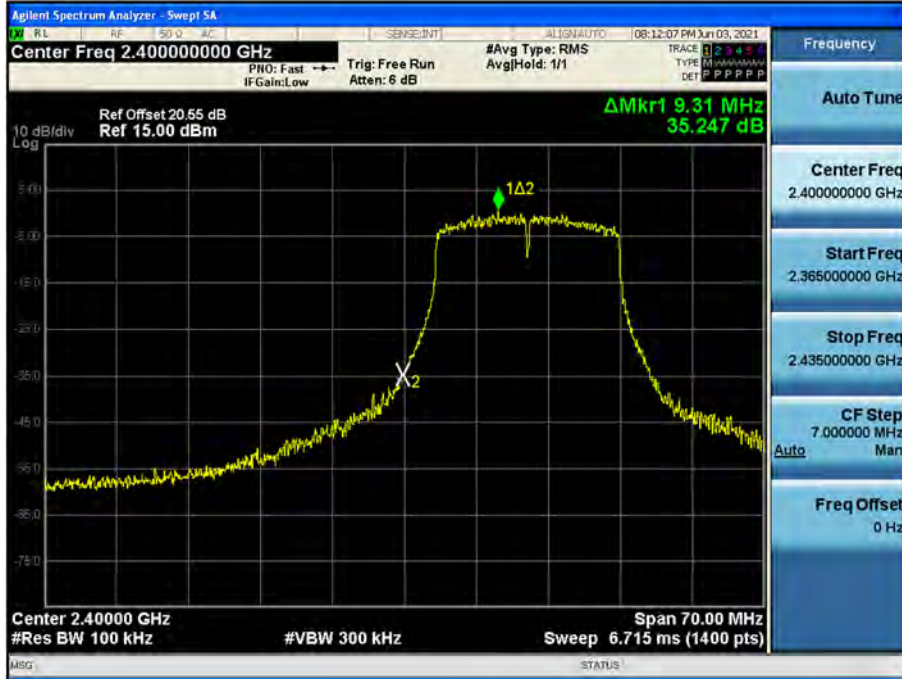


Band Edge (802.11n_HT20 -CH11)




Band Edge (802.11n_HT20 -CH12)



Band Edge (802.11n_HT20 -CH13)

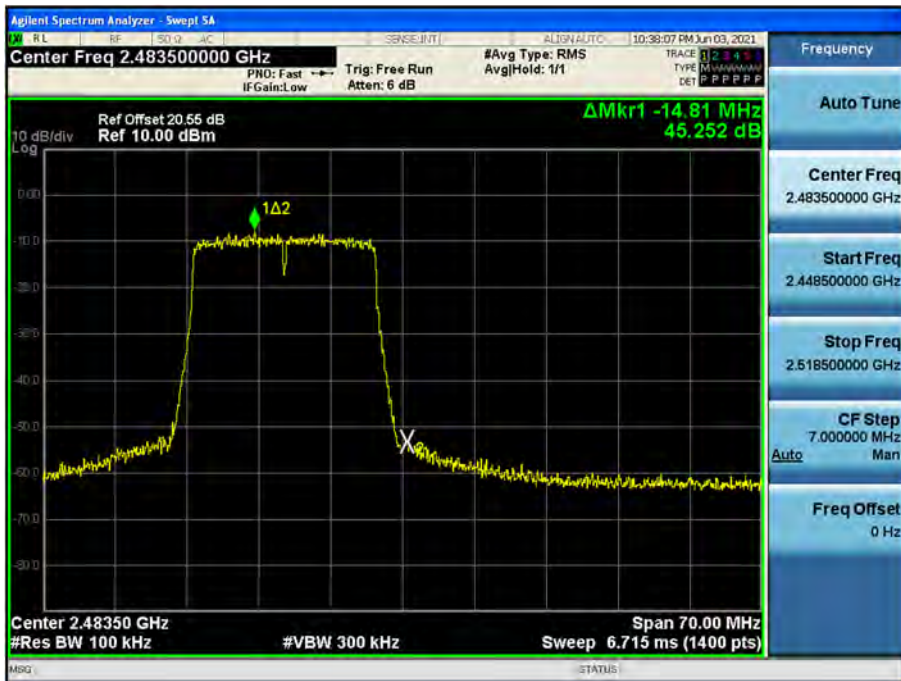

Band Edge (802.11n_HT40 -CH3)

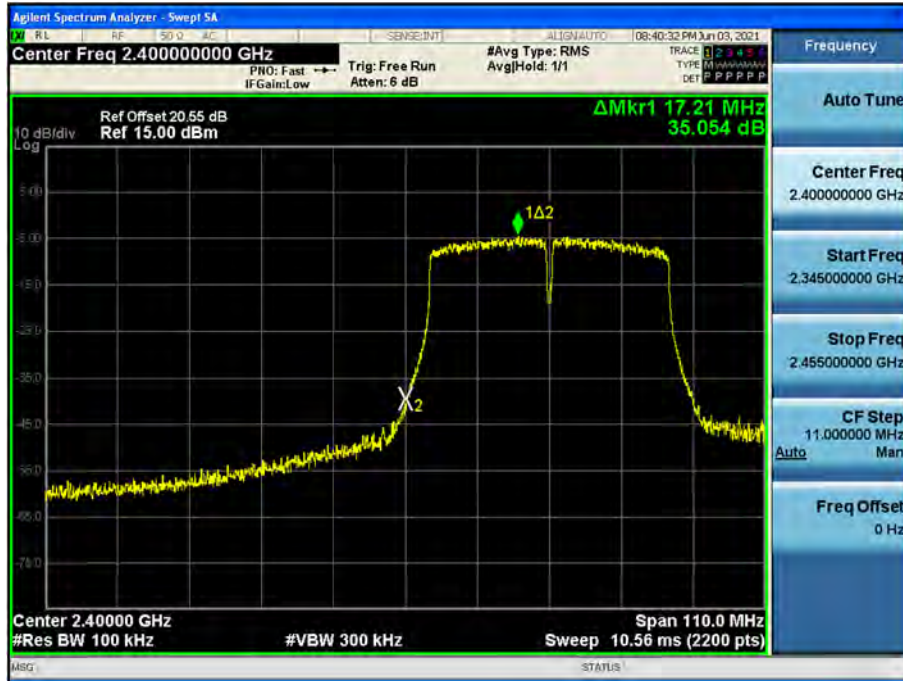


Band Edge (802.11n_HT40 -CH9)



☐ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

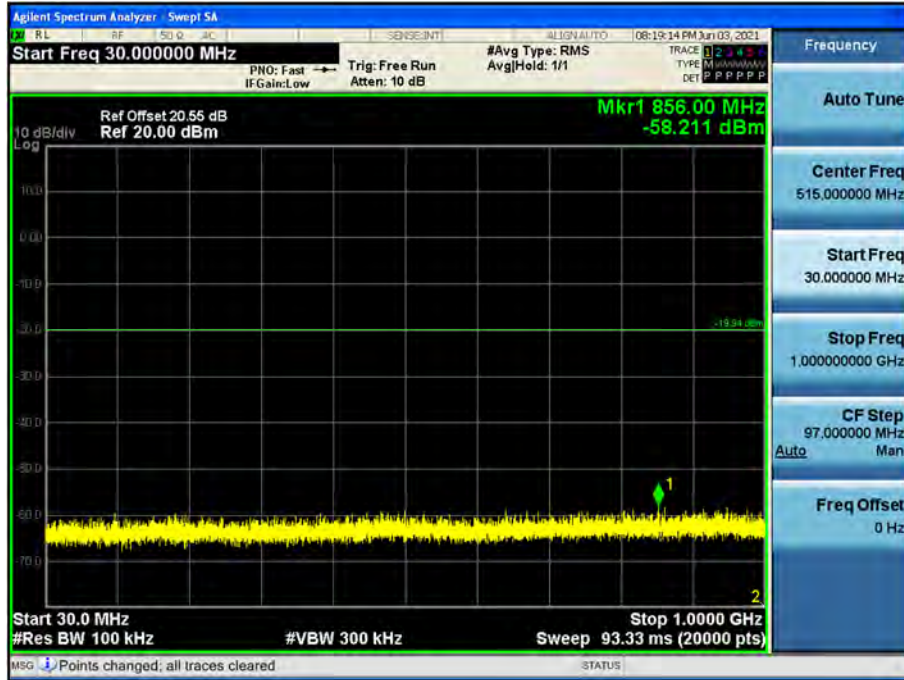


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

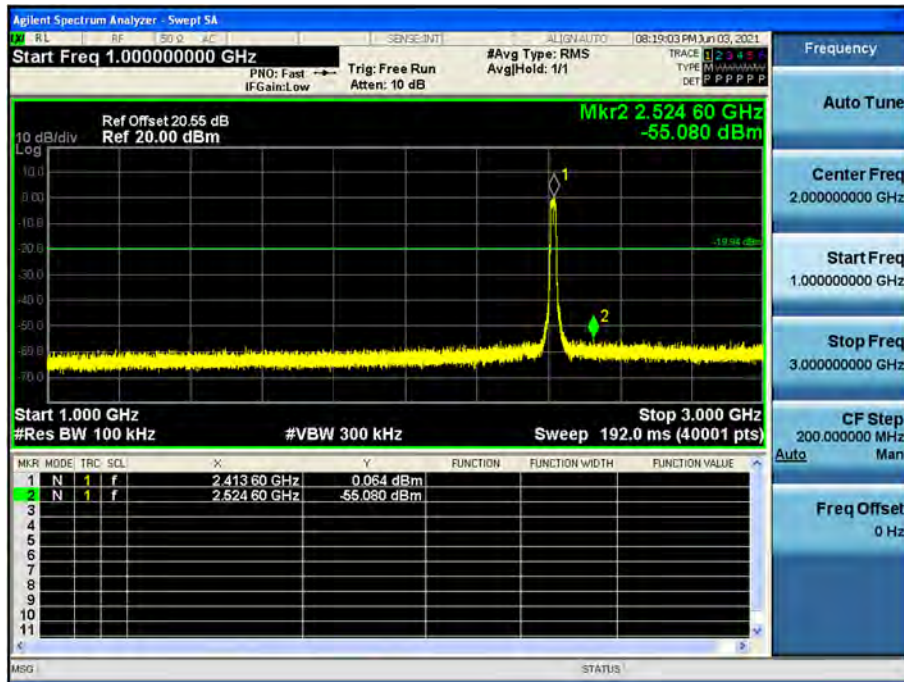


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

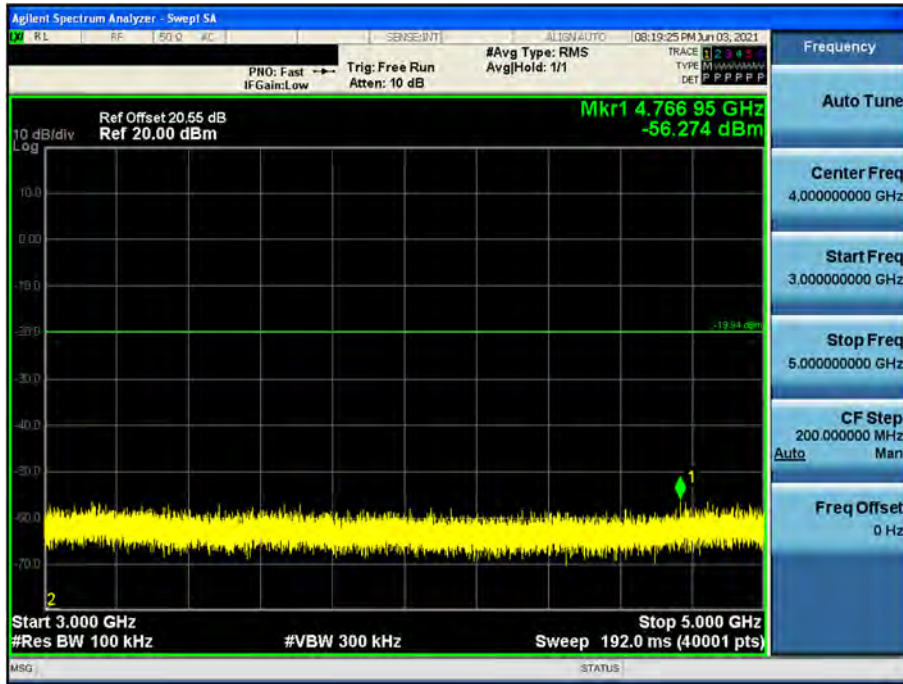


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

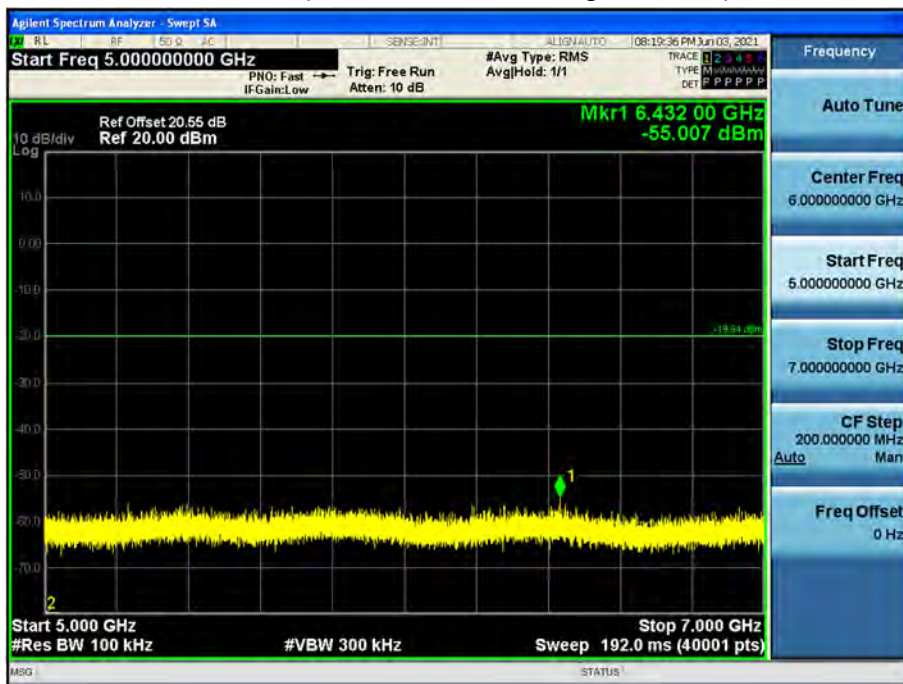


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

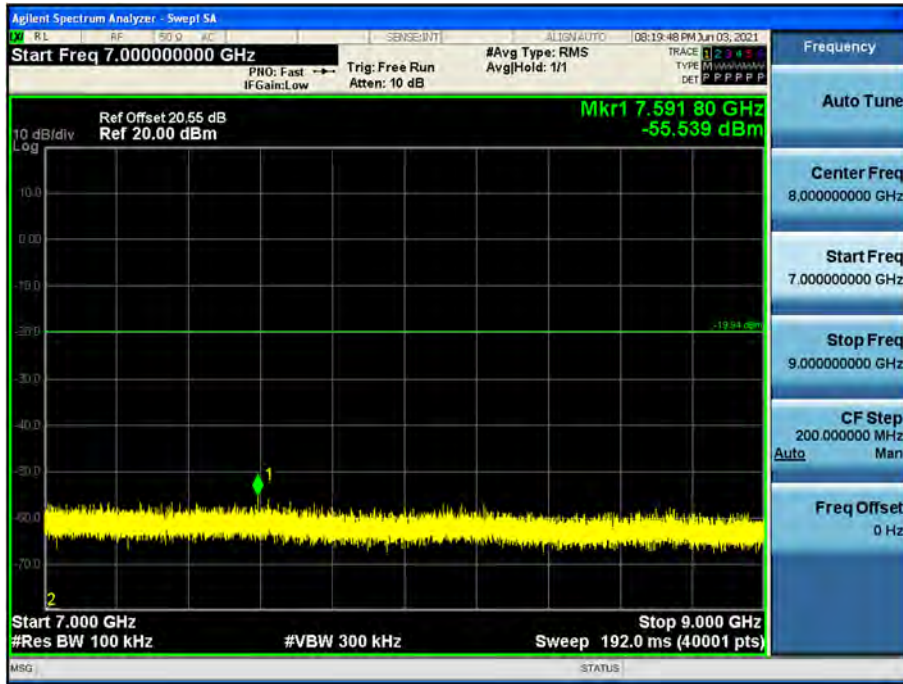


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

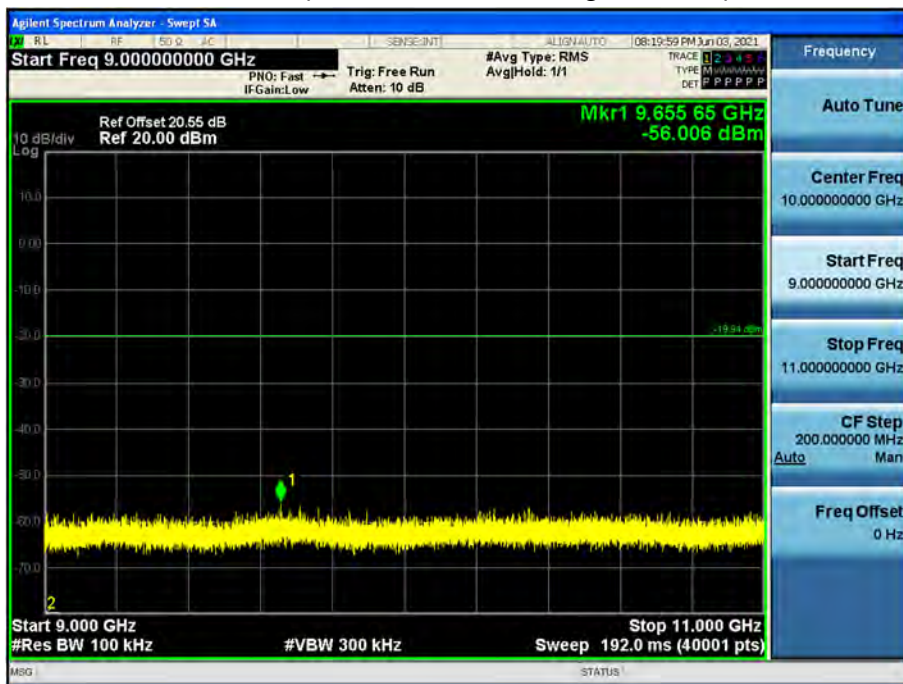


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

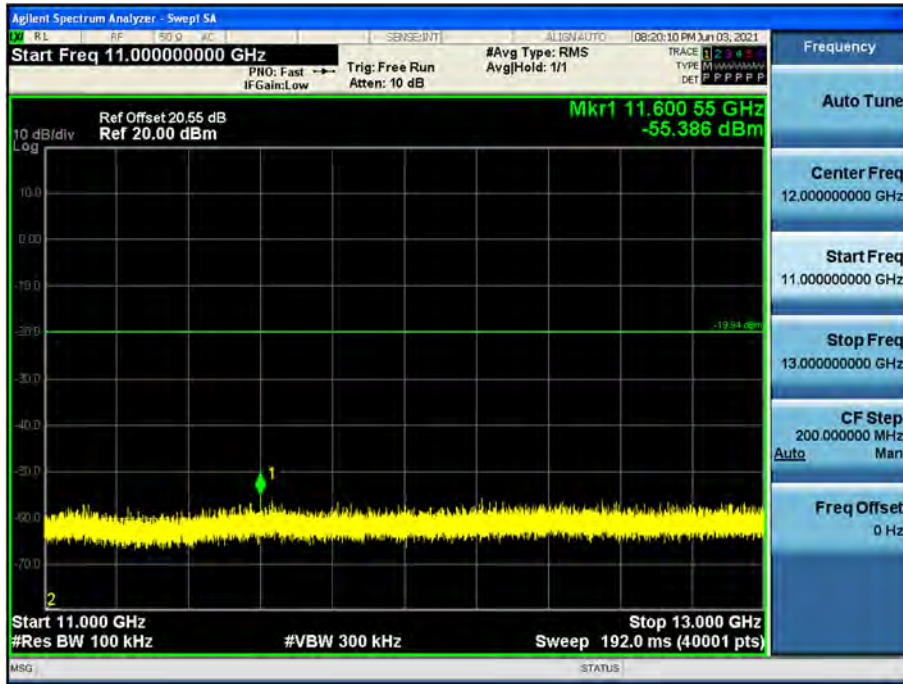


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

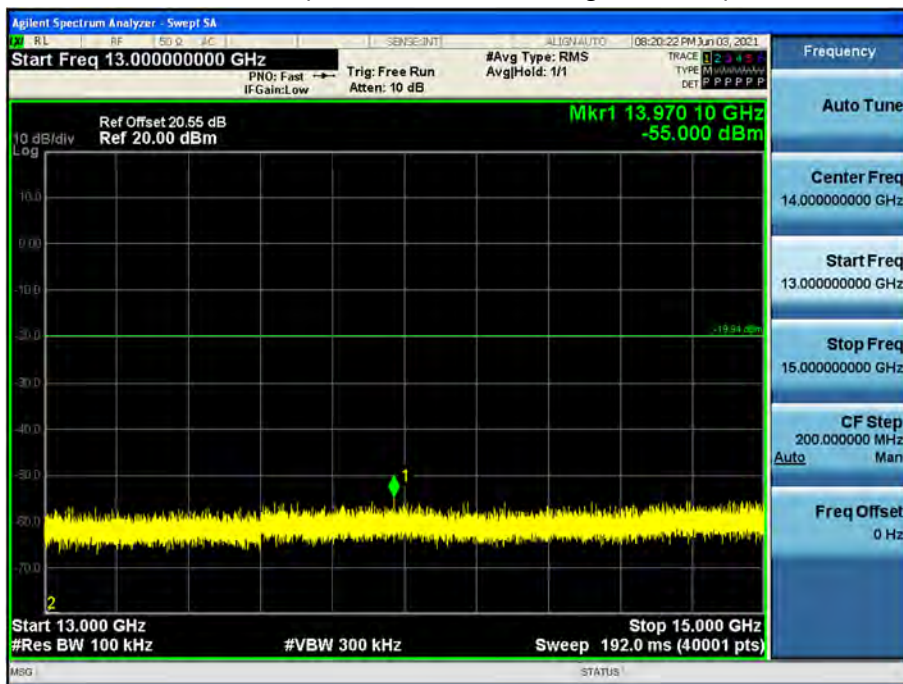


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

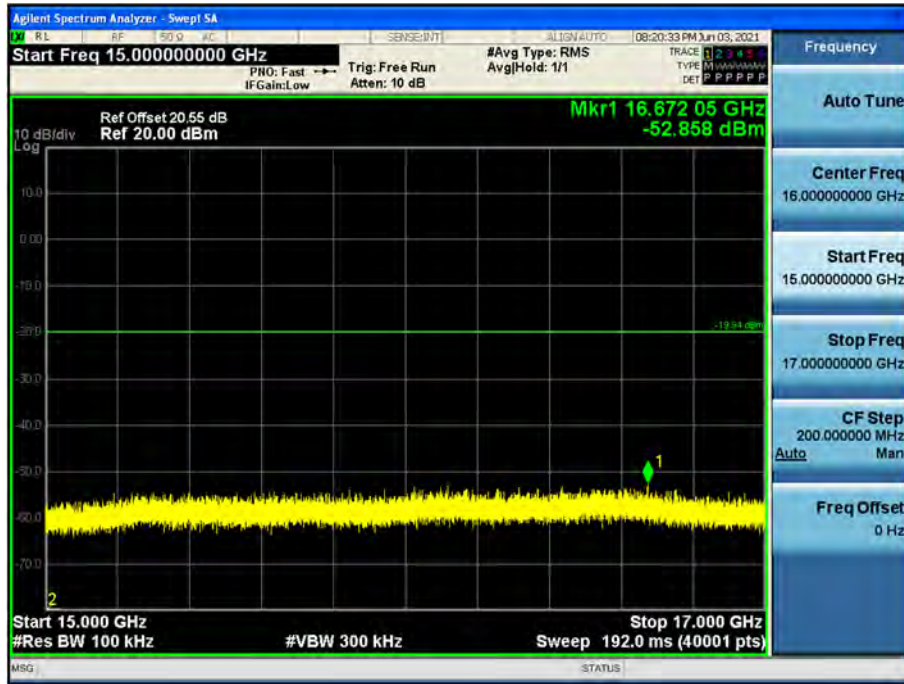


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

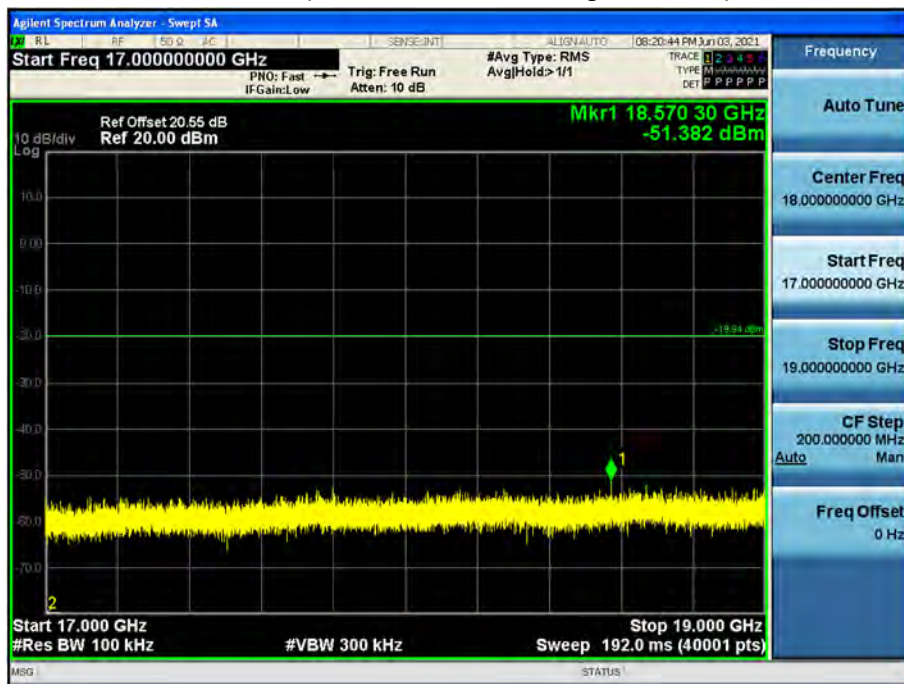


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

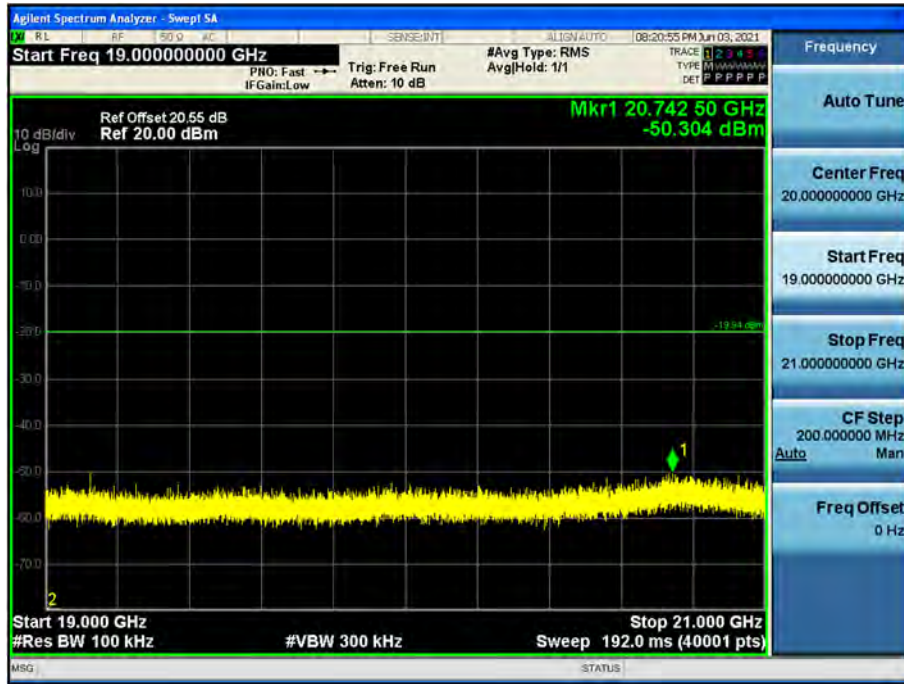


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

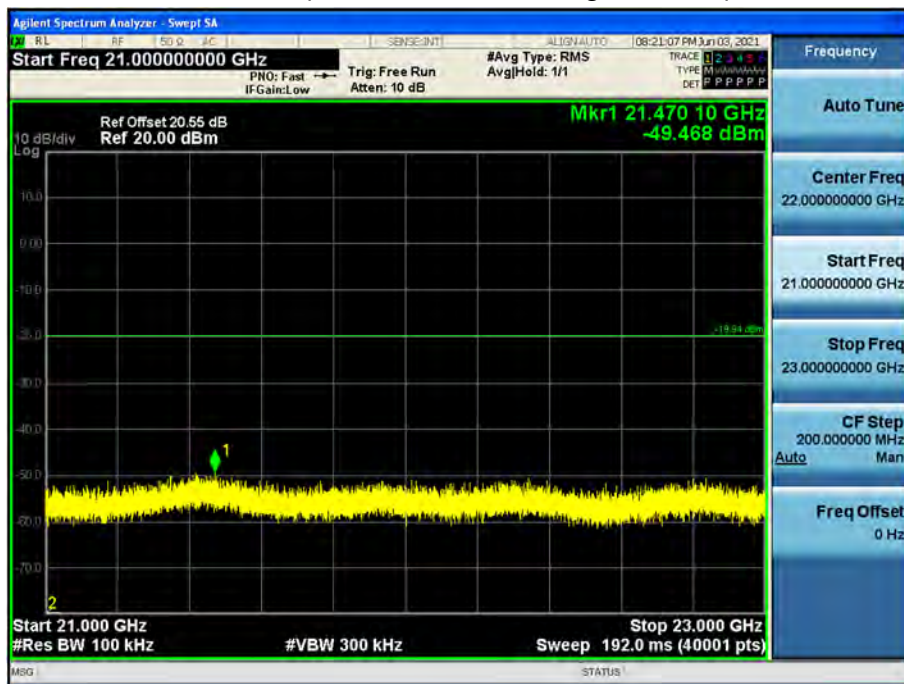

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

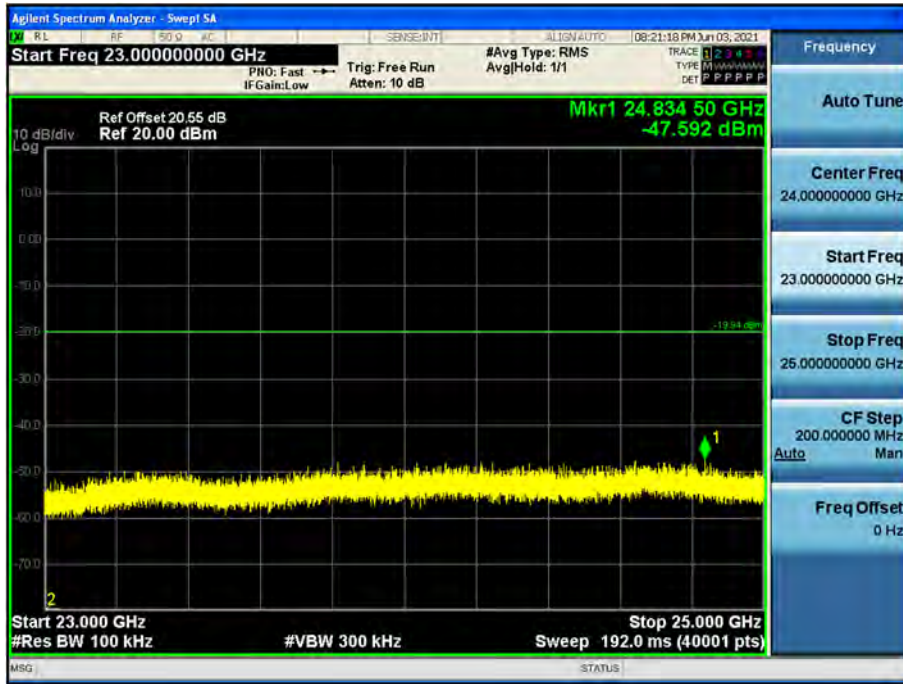


Note:

Limit : -19.94 dBm

[ANT2]

☐ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

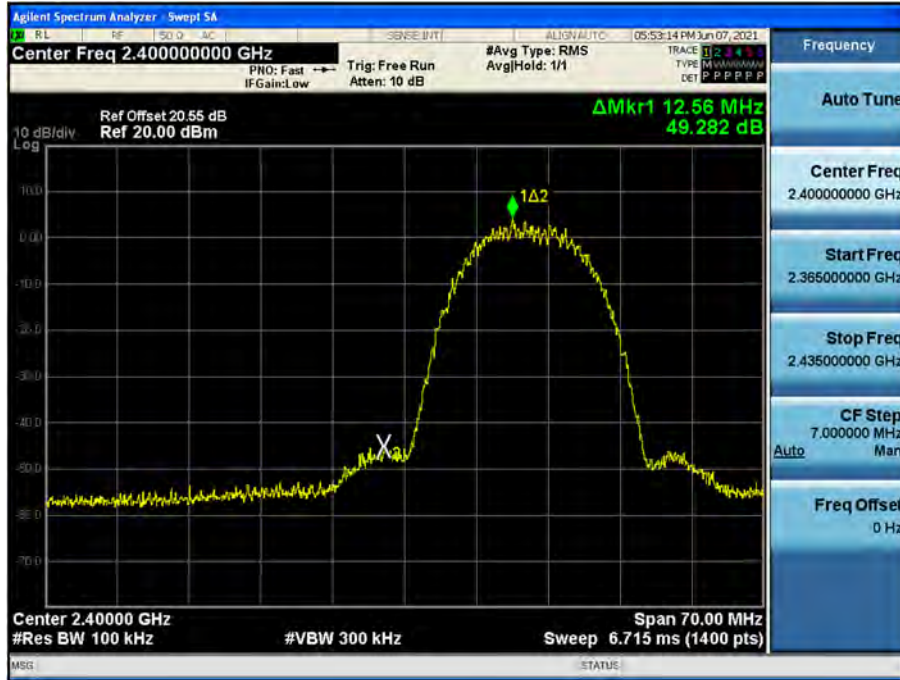


Band Edge (802.11b-CH11)




Band Edge (802.11b-CH12)

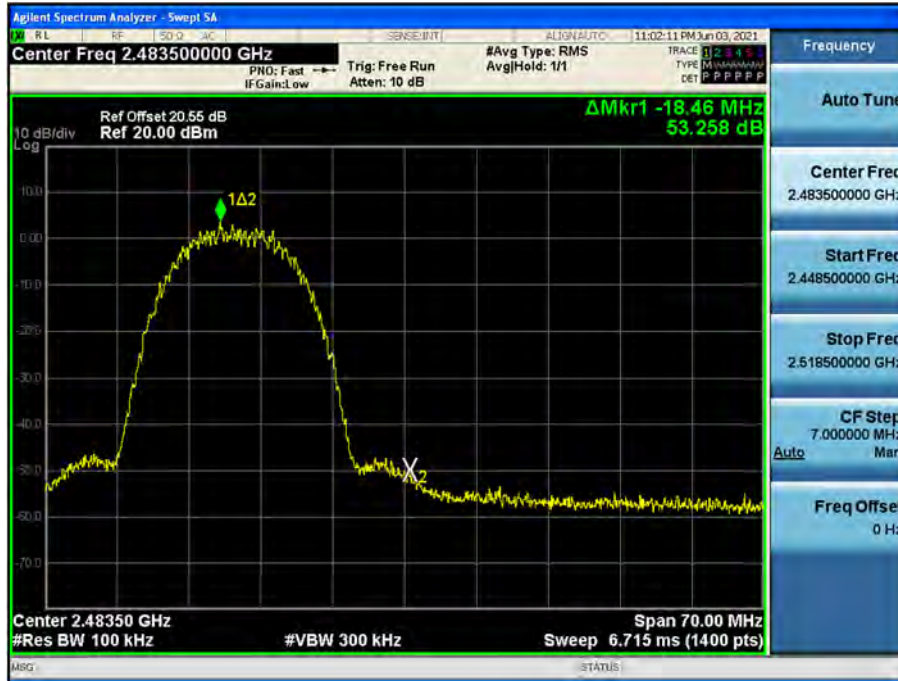

Band Edge (802.11b-CH13)

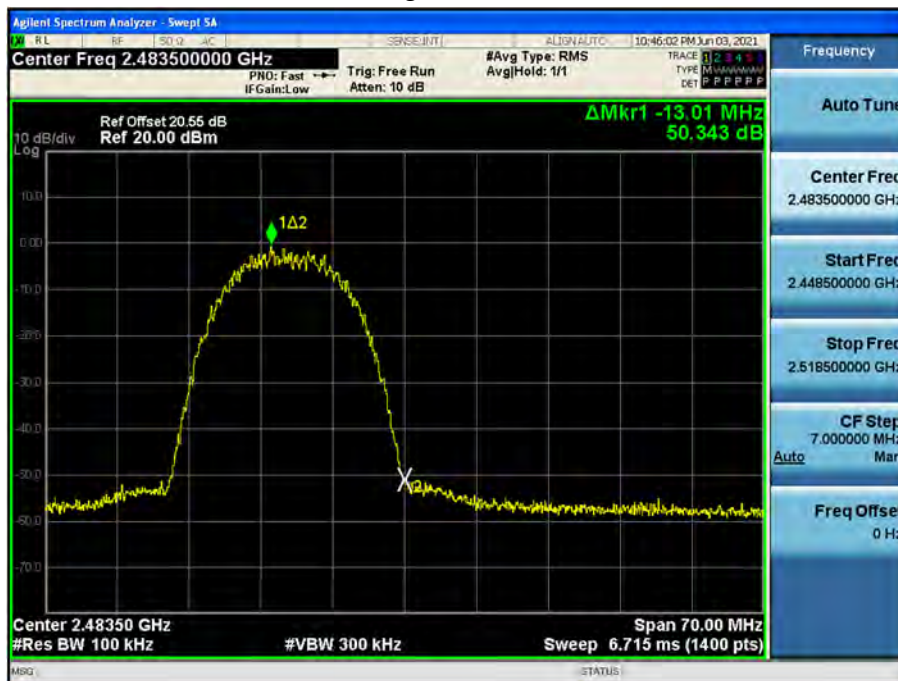

Band Edge (802.11g-CH1)

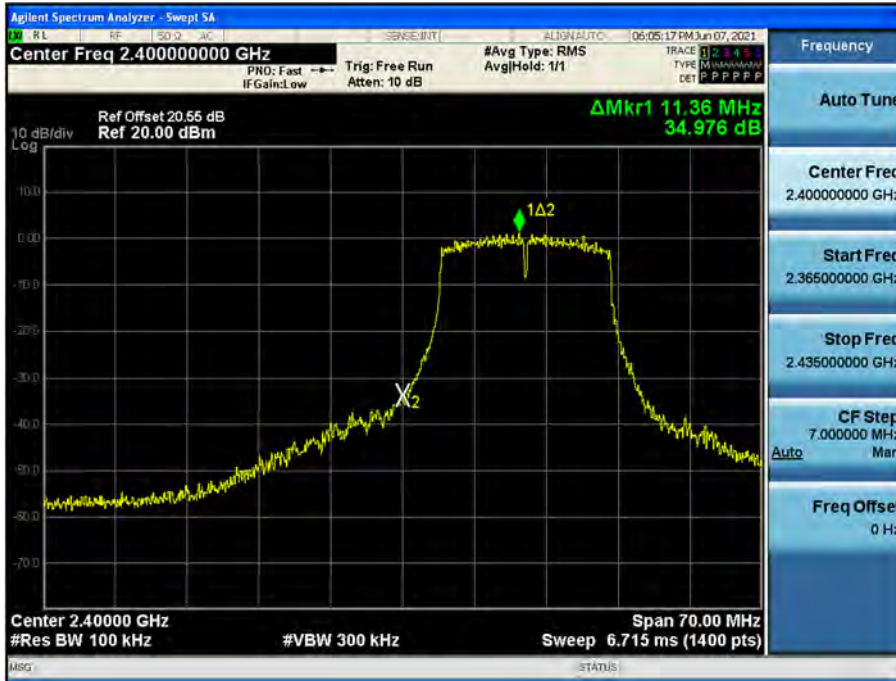

Band Edge (802.11g-CH11)




Band Edge (802.11g-CH12)



Band Edge (802.11g-CH13)



Band Edge (802.11n_HT20 -CH1)

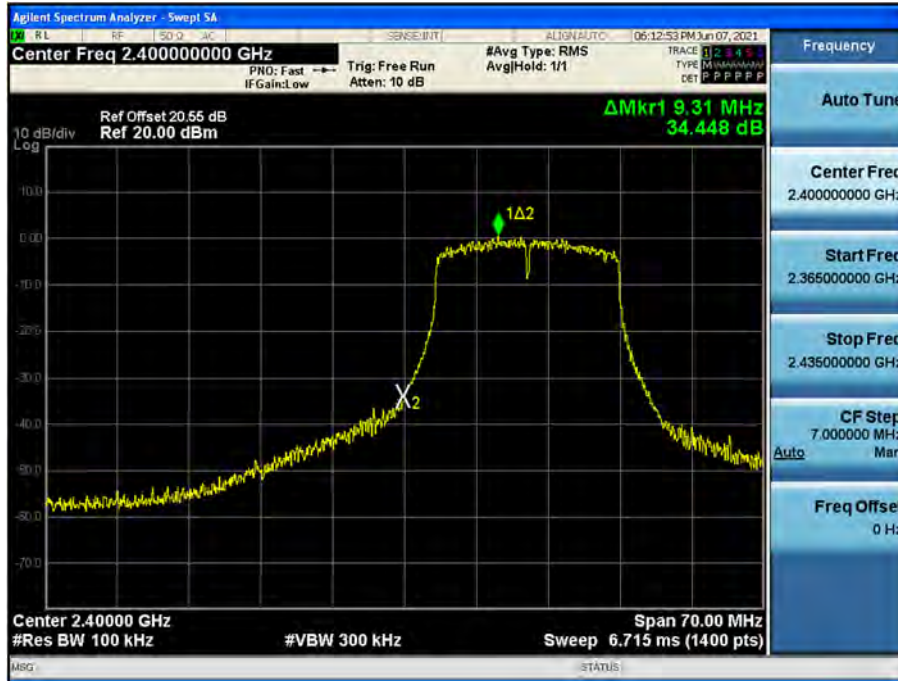


Band Edge (802.11n_HT20 -CH11)




Band Edge (802.11n_HT20 -CH12)



Band Edge (802.11n_HT20 -CH13)

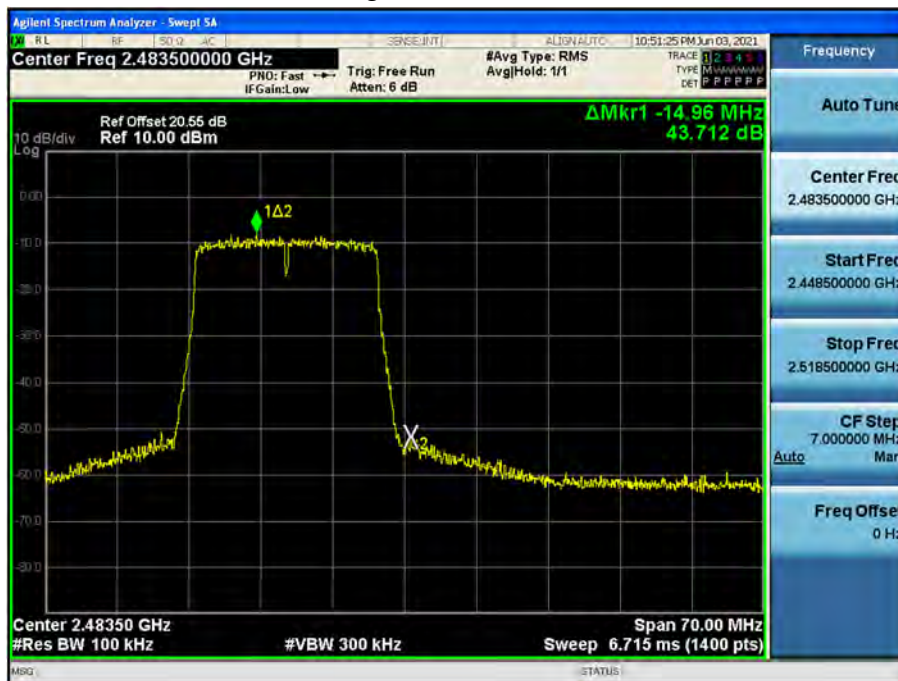

Band Edge (802.11n_HT40 -CH3)

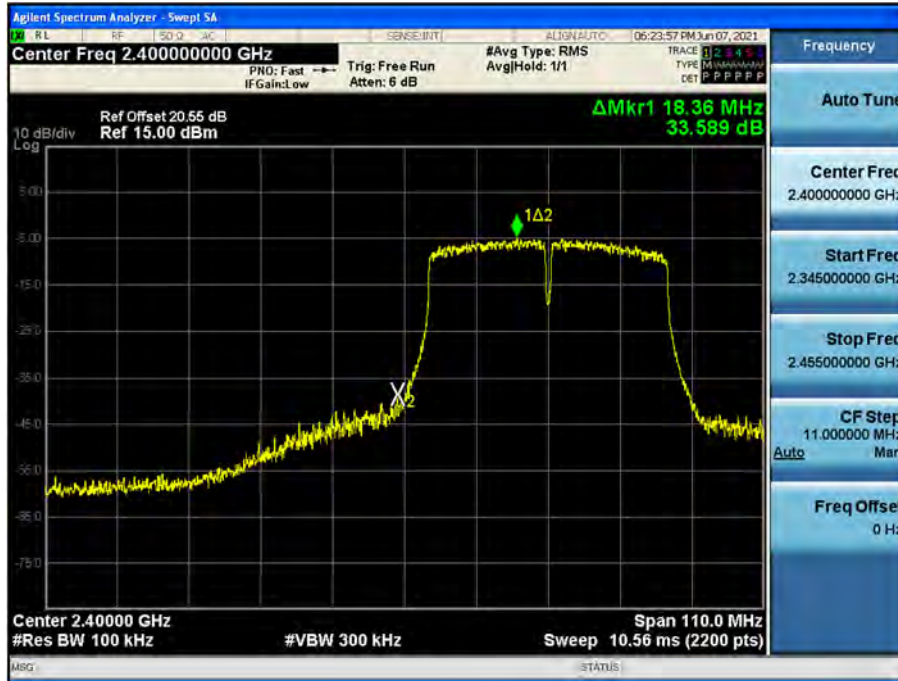


Band Edge (802.11n_HT40 -CH9)



☐ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

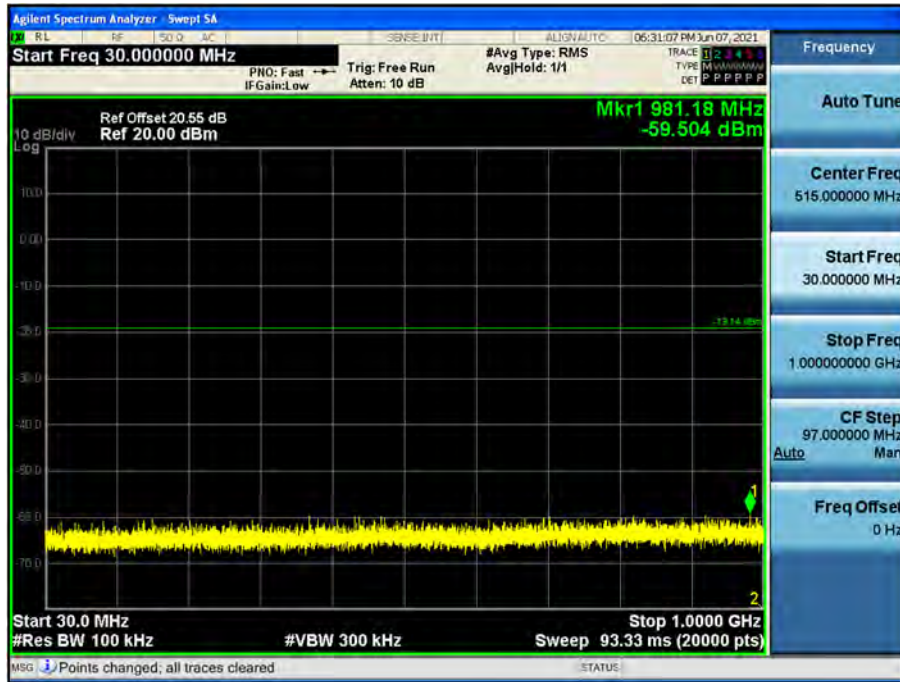


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

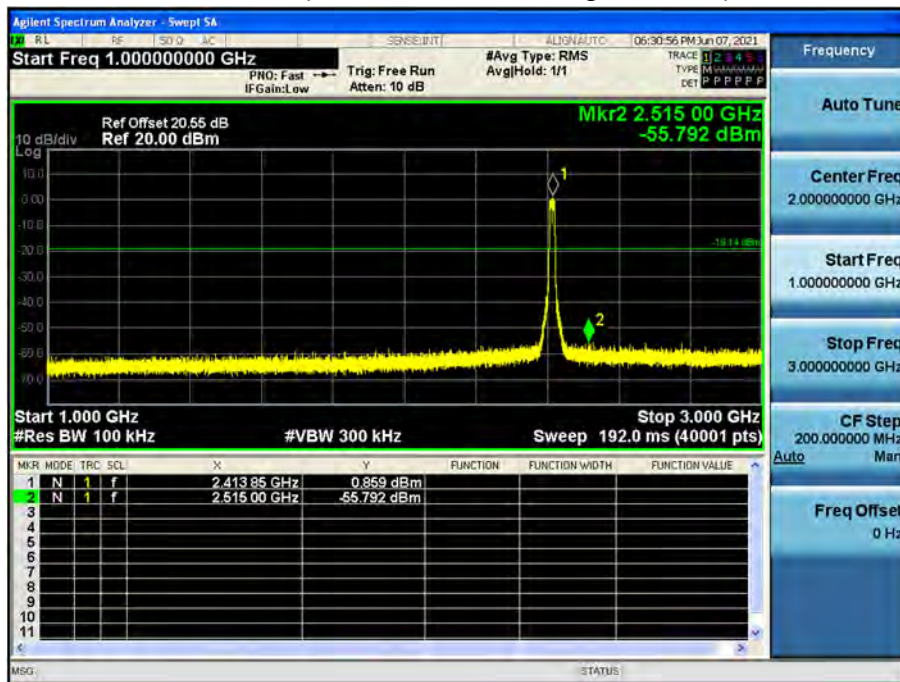


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

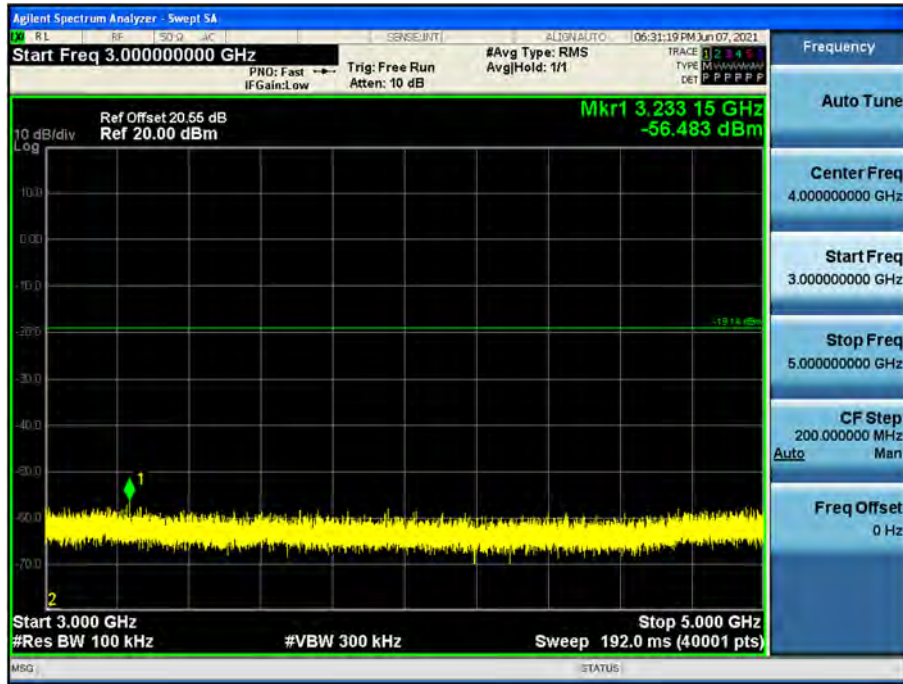


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

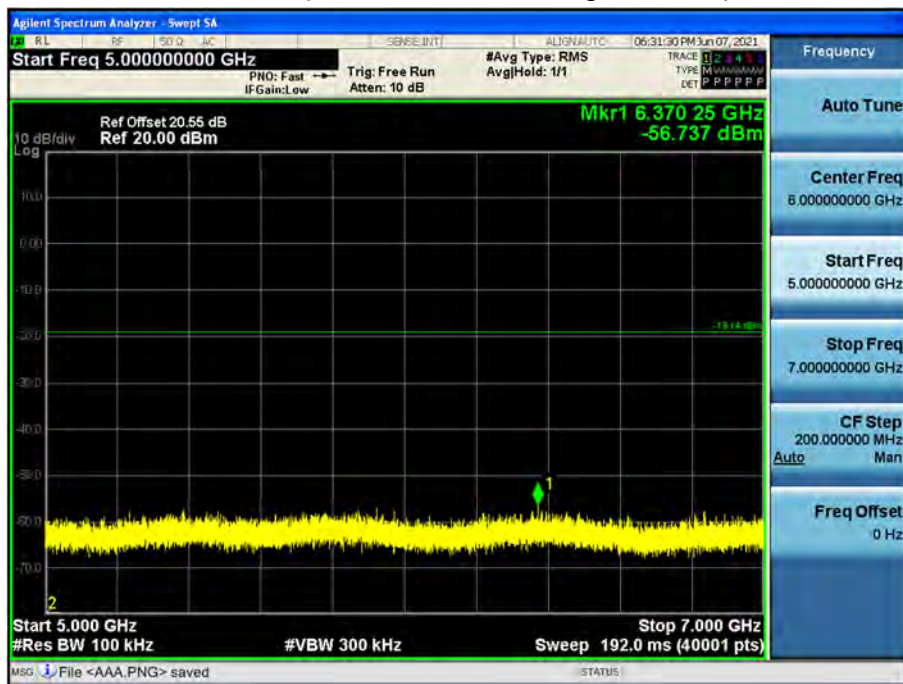


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

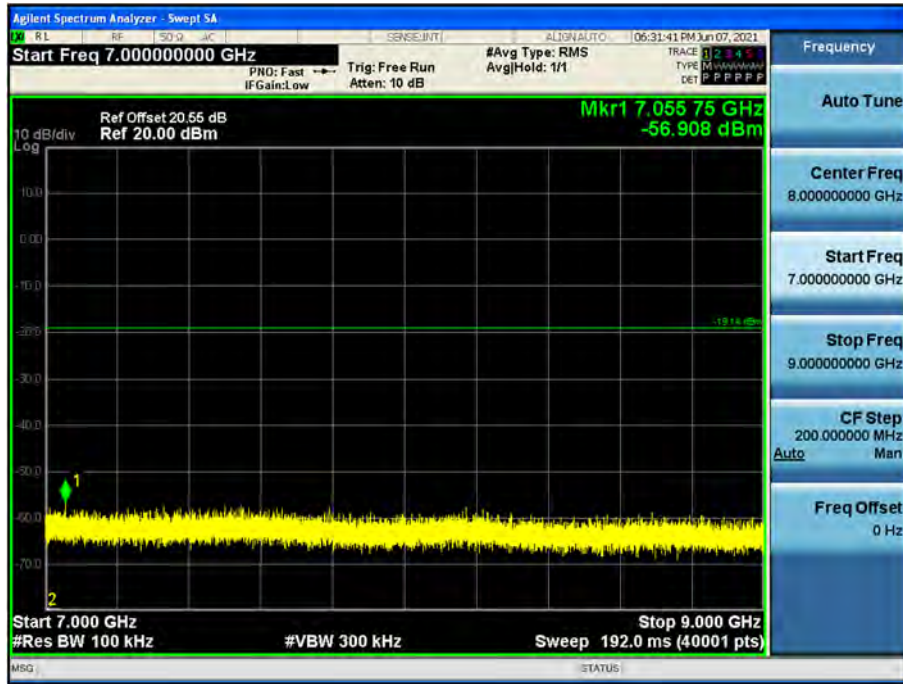


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

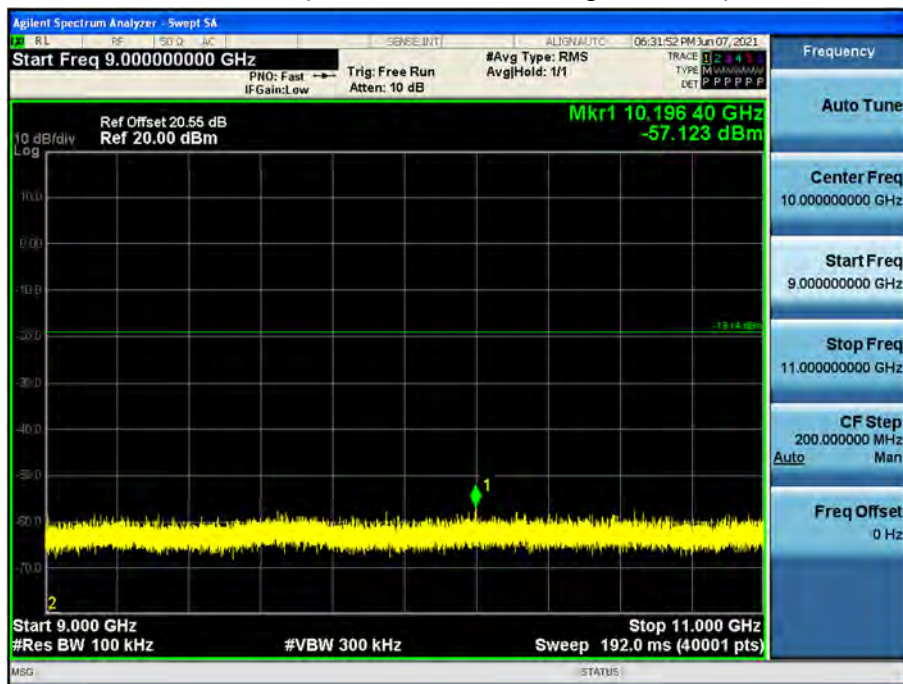


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

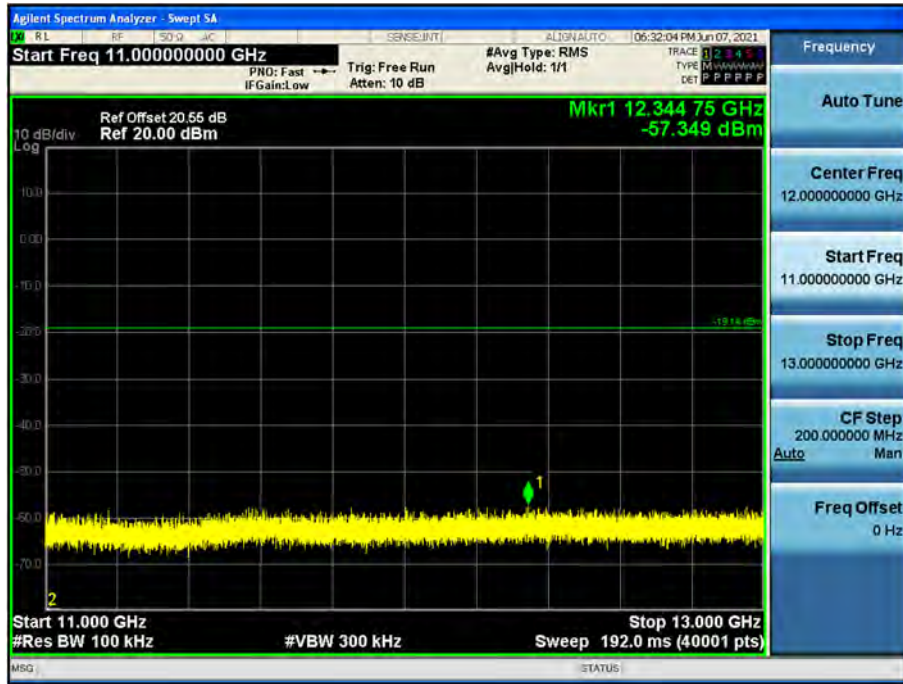


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

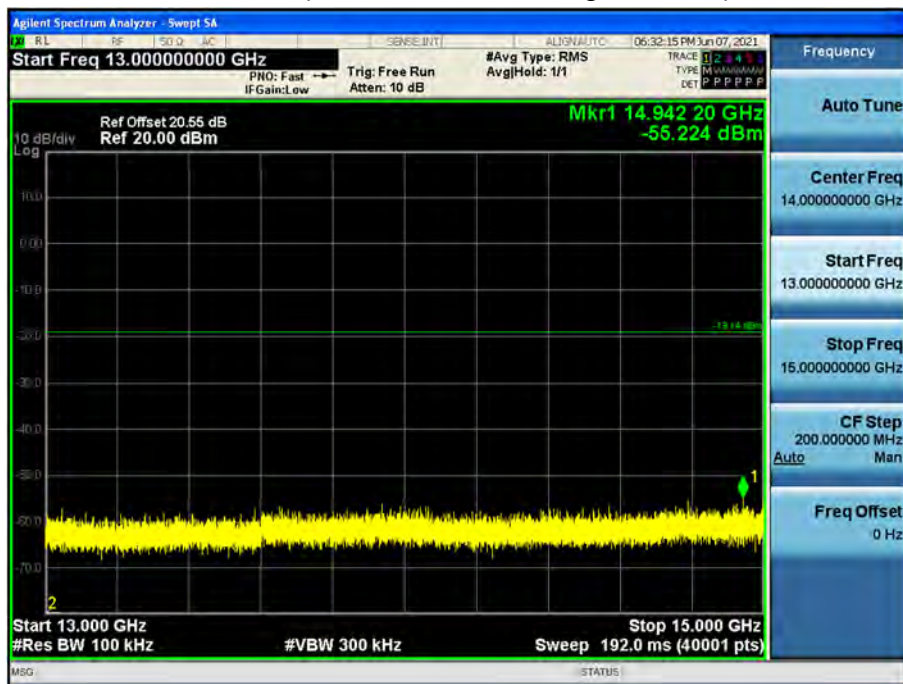


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

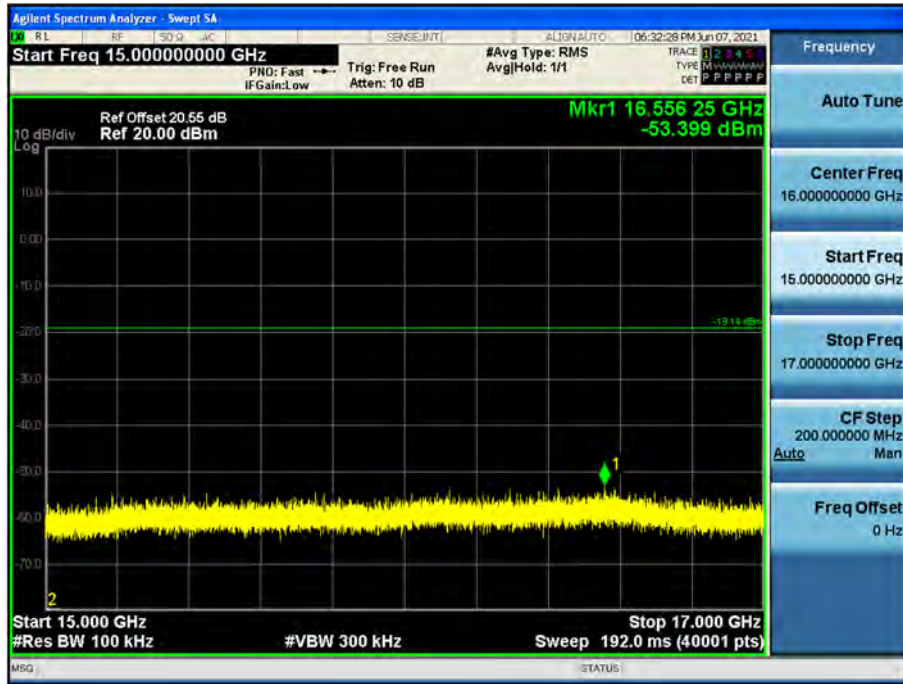


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

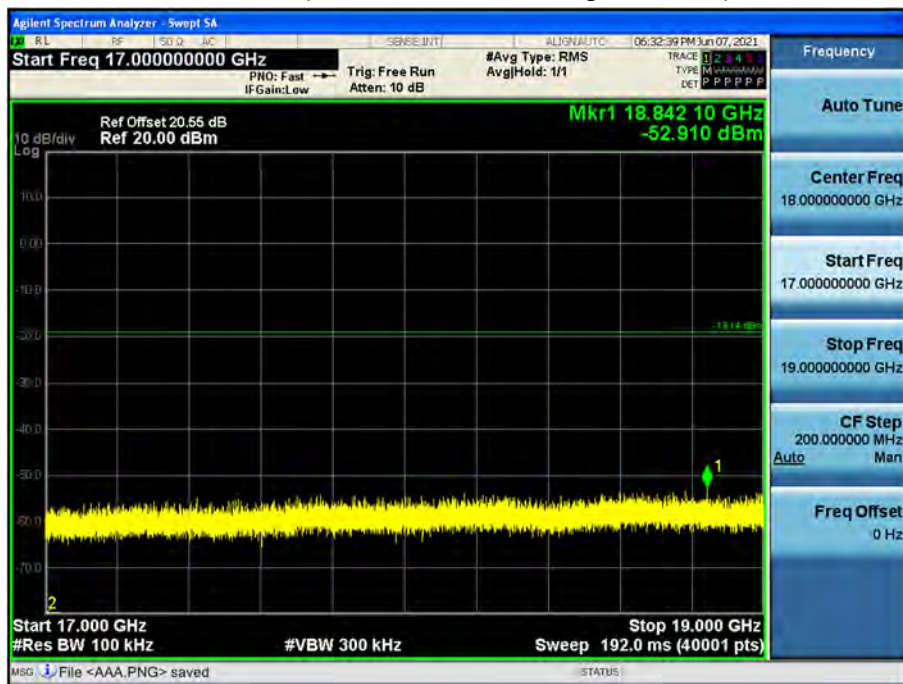


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

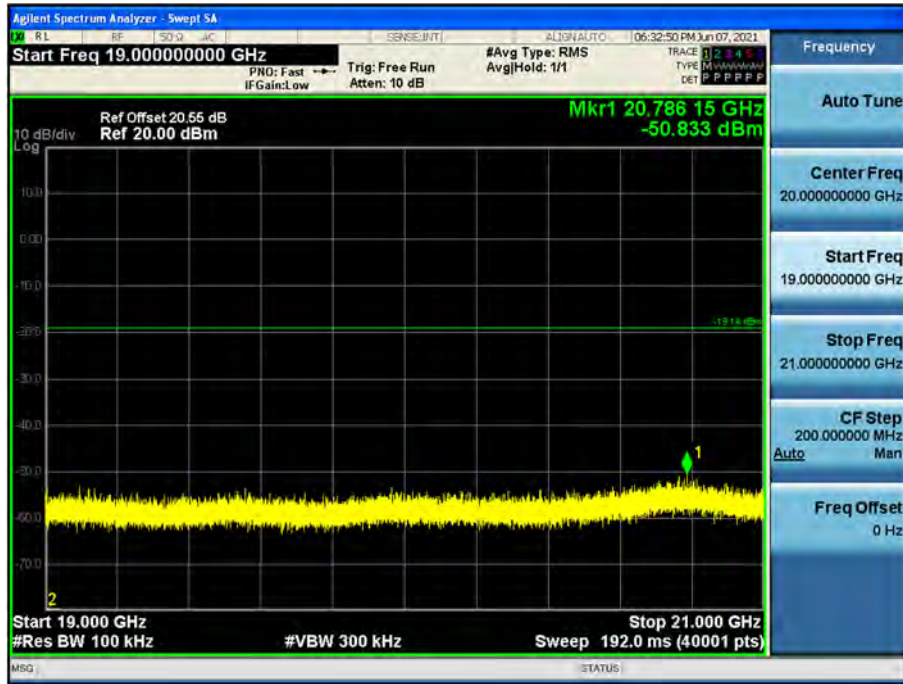


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

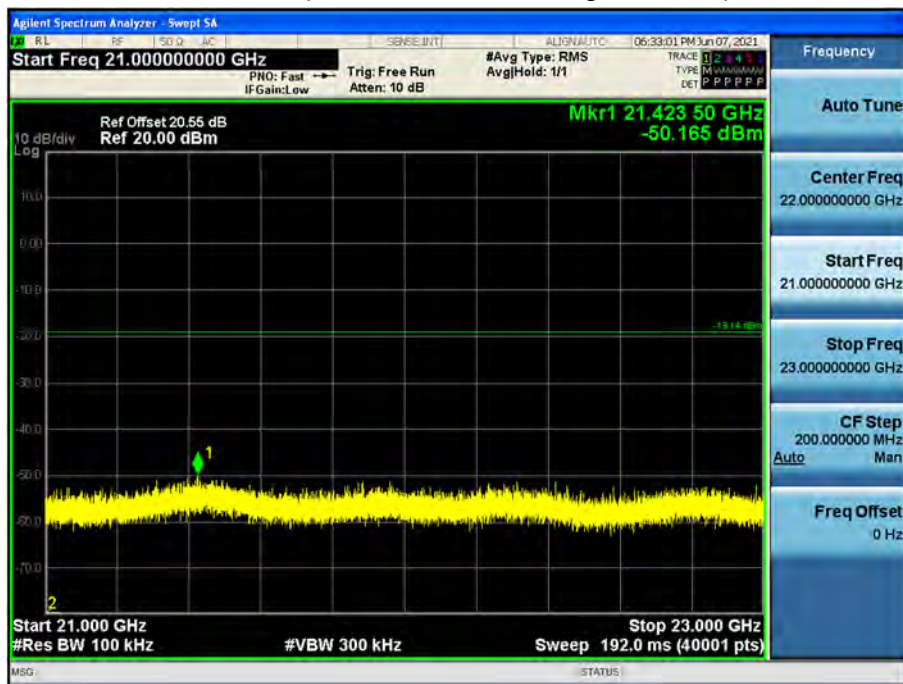

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11g_Ch.1_6Mbps)

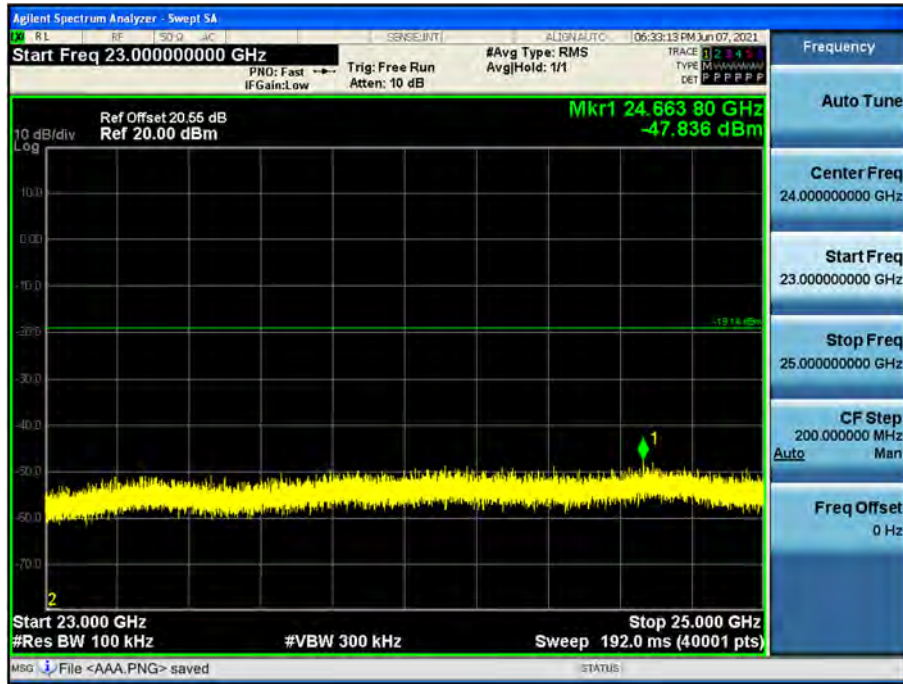

Note:

Limit : -19.14 dBm

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

| Frequency | Reading | Ant. factor | Cable loss | Ant. POL | Total | Limit | Margin |
|-------------------------|---------|-------------|------------|----------|--------|--------|--------|
| MHz | dBuV/m | dBm/m | dBm | (H/V) | dBuV/m | dBuV/m | dB |
| No Critical peaks found | | | | | | | |

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

| Frequency | Reading | Ant. factor | Cable loss | Ant. POL | Total | Limit | Margin |
|-------------------------|---------|-------------|------------|----------|--------|--------|--------|
| MHz | dBuV/m | dBm/m | dBm | (H/V) | dBuV/m | dBuV/m | dB |
| No Critical peaks found | | | | | | | |

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

[Only MIMO]

Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

| Frequency | Reading | AN.+CL-AMP G | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|---------|--------------|----------|----------|----------|--------|-------------|
| [MHz] | [dBuV] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 4824 | 43.54 | 3.62 | V | 47.16 | 73.98 | 26.82 | PK |
| 4824 | 32.15 | 3.62 | V | 35.77 | 53.98 | 18.21 | AV |
| 7236 | 40.44 | 9.26 | V | 49.70 | 73.98 | 24.28 | PK |
| 7236 | 28.46 | 9.26 | V | 37.72 | 53.98 | 16.26 | AV |
| 4824 | 43.77 | 3.62 | H | 47.39 | 73.98 | 26.59 | PK |
| 4824 | 32.68 | 3.62 | H | 36.30 | 53.98 | 17.68 | AV |
| 7236 | 40.58 | 9.26 | H | 49.84 | 73.98 | 24.14 | PK |
| 7236 | 28.60 | 9.26 | H | 37.86 | 53.98 | 16.12 | AV |

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

| Frequency | Reading | AN.+CL-AMP G | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|---------|--------------|----------|----------|----------|--------|-------------|
| [MHz] | [dBuV] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 4874 | 42.51 | 3.36 | V | 45.87 | 73.98 | 28.11 | PK |
| 4874 | 31.46 | 3.36 | V | 34.82 | 53.98 | 19.16 | AV |
| 7311 | 40.18 | 10.27 | V | 50.45 | 73.98 | 23.53 | PK |
| 7311 | 28.69 | 10.27 | V | 38.96 | 53.98 | 15.02 | AV |
| 4874 | 42.64 | 3.36 | H | 46.00 | 73.98 | 27.98 | PK |
| 4874 | 31.55 | 3.36 | H | 34.91 | 53.98 | 19.07 | AV |
| 7311 | 40.39 | 10.27 | H | 50.66 | 73.98 | 23.32 | PK |
| 7311 | 28.76 | 10.27 | H | 39.03 | 53.98 | 14.95 | AV |

| | |
|---------------------|---------|
| Operation Mode: | 802.11b |
| Transfer MCS Index: | 1 Mbps |
| Operating Frequency | 2462 |
| Channel No. | 11 Ch |

| Frequency | Reading | AN.+CL-AMP G | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|---------|--------------|----------|----------|----------|--------|-------------|
| [MHz] | [dBuV] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 4924 | 41.48 | 2.80 | V | 44.28 | 73.98 | 29.70 | PK |
| 4924 | 30.96 | 2.80 | V | 33.76 | 53.98 | 20.22 | AV |
| 7386 | 40.26 | 11.07 | V | 51.33 | 73.98 | 22.65 | PK |
| 7386 | 28.42 | 11.07 | V | 39.49 | 53.98 | 14.49 | AV |
| 4924 | 41.83 | 2.80 | H | 44.63 | 73.98 | 29.35 | PK |
| 4924 | 31.21 | 2.80 | H | 34.01 | 53.98 | 19.97 | AV |
| 7386 | 40.57 | 11.07 | H | 51.64 | 73.98 | 22.34 | PK |
| 7386 | 28.51 | 11.07 | H | 39.58 | 53.98 | 14.40 | AV |

Note:


All Modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

- Worstcase : 802.11b


▣ Test Plots (Worst case : X-H)

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.11 3rd Harmonic)

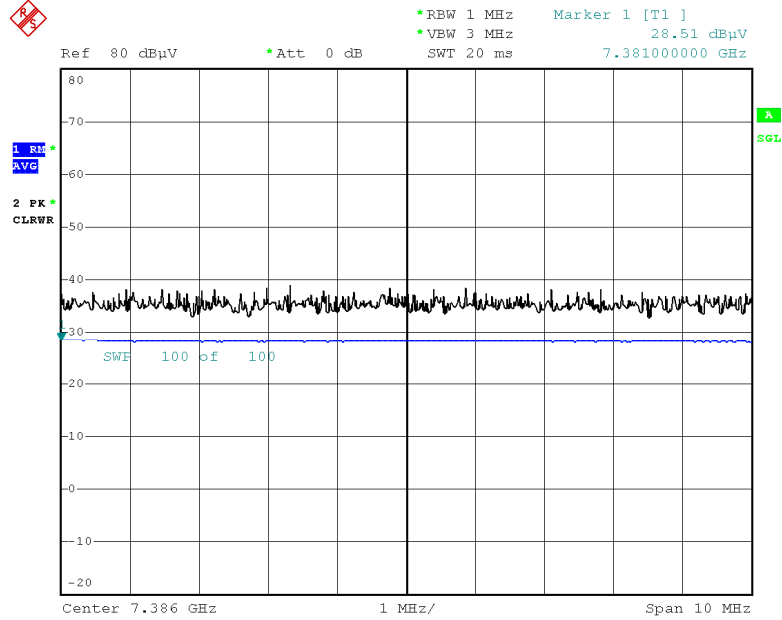

Date: 23.APR.2021 02:17:12

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.11 3rd Harmonic)

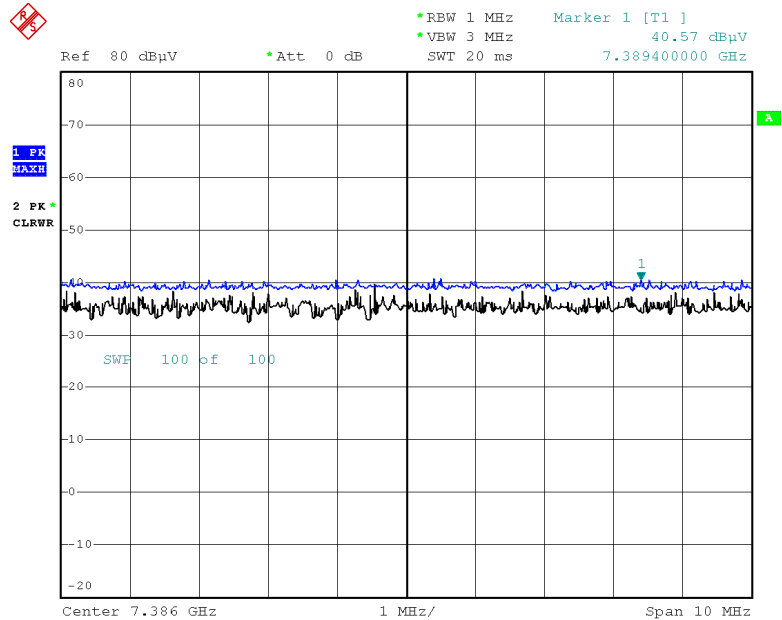

Date: 23.APR.2021 02:15:50

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

| | |
|---------------------|--------------------|
| Operation Mode: | 802.11b |
| Transfer Rate: | 1 Mbps |
| Operating Frequency | 2412 MHz, 2462 MHz |
| Channel No. | 01 Ch, 11 Ch |

| Frequency | Reading | ※ A.F.+CL | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|---------|-----------|----------|----------|----------|--------|-------------|
| [MHz] | [dBuV] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 2390.0 | 18.07 | 35.16 | H | 53.23 | 73.98 | 20.75 | PK |
| 2390.0 | 9.90 | 35.16 | H | 45.06 | 53.98 | 8.92 | AV |
| 2390.0 | 17.96 | 35.16 | V | 53.12 | 73.98 | 20.86 | PK |
| 2390.0 | 9.81 | 35.16 | V | 44.97 | 53.98 | 9.01 | AV |
| 2483.5 | 20.46 | 35.36 | H | 55.82 | 73.98 | 18.16 | PK |
| 2483.5 | 11.36 | 35.36 | H | 46.71 | 53.98 | 7.27 | AV |
| 2483.5 | 20.22 | 35.36 | V | 55.58 | 73.98 | 18.40 | PK |
| 2483.5 | 11.31 | 35.36 | V | 46.67 | 53.98 | 7.31 | AV |

| | |
|---------------------|--------------------|
| Operation Mode: | 802.11b |
| Transfer Rate: | 1 Mbps |
| Operating Frequency | 2467 MHz, 2472 MHz |
| Channel No. | 12 Ch, 13 Ch |

| Frequency | Reading | ※ A.F.+CL | ANT. POL | Total | Limit | Margin | Measurement |
|----------------|---------|-----------|----------|----------|----------|--------|-------------|
| [MHz] | [dBuV] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 12 ch / 2483.5 | 23.87 | 35.36 | H | 59.23 | 73.98 | 14.75 | PK |
| 12 ch / 2483.5 | 15.15 | 35.36 | H | 50.51 | 53.98 | 3.47 | AV |
| 12 ch / 2483.5 | 23.58 | 35.36 | V | 58.94 | 73.98 | 15.04 | PK |
| 12 ch / 2483.5 | 15.02 | 35.36 | V | 50.37 | 53.98 | 3.61 | AV |
| 13 ch / 2483.5 | 23.39 | 35.36 | H | 58.74 | 73.98 | 15.24 | PK |
| 13 ch / 2483.5 | 14.00 | 35.36 | H | 49.36 | 53.98 | 4.62 | AV |
| 13 ch / 2483.5 | 23.08 | 35.36 | V | 58.44 | 73.98 | 15.54 | PK |
| 13 ch / 2483.5 | 13.57 | 35.36 | V | 48.93 | 53.98 | 5.05 | AV |

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

| Frequency | Reading | Duty Cycle | ※ A.F.+CL | ANT. POL | Total | Limit | Margin | Measurement Type |
|-----------|---------|-------------|-----------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | Factor [dB] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 2390.0 | 25.69 | 0.00 | 35.16 | H | 60.85 | 73.98 | 13.13 | PK |
| 2390.0 | 13.16 | 0.00 | 35.16 | H | 48.32 | 53.98 | 5.66 | AV |
| 2390.0 | 25.55 | 0.00 | 35.16 | V | 60.71 | 73.98 | 13.27 | PK |
| 2390.0 | 13.12 | 0.00 | 35.16 | V | 48.28 | 53.98 | 5.70 | AV |
| 2483.5 | 25.30 | 0.00 | 35.36 | H | 60.65 | 73.98 | 13.33 | PK |
| 2483.5 | 13.78 | 0.00 | 35.36 | H | 49.13 | 53.98 | 4.85 | AV |
| 2483.5 | 25.19 | 0.00 | 35.36 | V | 60.55 | 73.98 | 13.43 | PK |
| 2483.5 | 13.68 | 0.00 | 35.36 | V | 49.04 | 53.98 | 4.94 | AV |

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No.: 12 Ch, 13 Ch

| Frequency | Reading | Duty Cycle | ※ A.F.+CL | ANT. POL | Total | Limit | Margin | Measurement Type |
|----------------|---------|-------------|-----------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | Factor [dB] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 12 ch / 2483.5 | 26.20 | 0.00 | 35.36 | H | 61.56 | 73.98 | 12.42 | PK |
| 12 ch / 2483.5 | 14.79 | 0.00 | 35.36 | H | 50.15 | 53.98 | 3.83 | AV |
| 12 ch / 2483.5 | 26.00 | 0.00 | 35.36 | V | 61.35 | 73.98 | 12.63 | PK |
| 12 ch / 2483.5 | 14.51 | 0.00 | 35.36 | V | 49.87 | 53.98 | 4.11 | AV |
| 13 ch / 2483.5 | 25.22 | 0.00 | 35.36 | H | 60.58 | 73.98 | 13.40 | PK |
| 13 ch / 2483.5 | 13.32 | 0.00 | 35.36 | H | 48.67 | 53.98 | 5.31 | AV |
| 13 ch / 2483.5 | 25.10 | 0.00 | 35.36 | V | 60.45 | 73.98 | 13.53 | PK |
| 13 ch / 2483.5 | 13.23 | 0.00 | 35.36 | V | 48.59 | 53.98 | 5.39 | AV |

| | |
|---------------------|--------------------|
| Operation Mode: | 802.11n (HT20) |
| Transfer Rate: | MCS0 |
| Operating Frequency | 2412 MHz, 2462 MHz |
| Channel No. | 01 Ch, 11 Ch |

| Frequency | Reading | Duty Cycle | ※ A.F.+CL | ANT. POL | Total | Limit | Margin | Measurement Type |
|-----------|---------|-------------|-----------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | Factor [dB] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 2390.0 | 28.43 | 0.00 | 35.16 | H | 63.59 | 73.98 | 10.39 | PK |
| 2390.0 | 14.52 | 0.00 | 35.16 | H | 49.68 | 53.98 | 4.30 | AV |
| 2390.0 | 28.33 | 0.00 | 35.16 | V | 63.49 | 73.98 | 10.49 | PK |
| 2390.0 | 14.19 | 0.00 | 35.16 | V | 49.35 | 53.98 | 4.63 | AV |
| 2483.5 | 29.57 | 0.00 | 35.36 | H | 64.93 | 73.98 | 9.05 | PK |
| 2483.5 | 14.87 | 0.00 | 35.36 | H | 50.23 | 53.98 | 3.75 | AV |
| 2483.5 | 29.42 | 0.00 | 35.36 | V | 64.78 | 73.98 | 9.20 | PK |
| 2483.5 | 14.49 | 0.00 | 35.36 | V | 49.85 | 53.98 | 4.13 | AV |

| | |
|---------------------|--------------------|
| Operation Mode: | 802.11n (HT20) |
| Transfer Rate: | MCS 0 |
| Operating Frequency | 2467 MHz, 2472 MHz |
| Channel No. | 12 Ch, 13 Ch |

| Frequency | Reading | Duty Cycle | ※ A.F.+CL | ANT. POL | Total | Limit | Margin | Measurement Type |
|----------------|---------|-------------|-----------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | Factor [dB] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 12 ch / 2483.5 | 28.43 | 0.00 | 35.36 | H | 63.79 | 73.98 | 10.19 | PK |
| 12 ch / 2483.5 | 15.41 | 0.00 | 35.36 | H | 50.77 | 53.98 | 3.21 | AV |
| 12 ch / 2483.5 | 28.19 | 0.00 | 35.36 | V | 63.55 | 73.98 | 10.43 | PK |
| 12 ch / 2483.5 | 15.12 | 0.00 | 35.36 | V | 50.48 | 53.98 | 3.50 | AV |
| 13 ch / 2483.5 | 26.39 | 0.00 | 35.36 | H | 61.75 | 73.98 | 12.23 | PK |
| 13 ch / 2483.5 | 13.89 | 0.00 | 35.36 | H | 49.25 | 53.98 | 4.73 | AV |
| 13 ch / 2483.5 | 26.18 | 0.00 | 35.36 | V | 61.54 | 73.98 | 12.44 | PK |
| 13 ch / 2483.5 | 13.46 | 0.00 | 35.36 | V | 48.82 | 53.98 | 5.16 | AV |

| | |
|---------------------|--------------------|
| Operation Mode: | 802.11n (HT40) |
| Transfer Rate: | MCS 0 |
| Operating Frequency | 2422 MHz, 2452 MHz |
| Channel No. | 03 Ch, 09 Ch |

| Frequency | Reading | Duty Cycle | ※ A.F.+CL | ANT. POL | Total | Limit | Margin | Measurement Type |
|-----------|---------|-------------|-----------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | Factor [dB] | [dB] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 2390.0 | 27.18 | 0.00 | 35.16 | H | 62.34 | 73.98 | 11.64 | PK |
| 2390.0 | 15.12 | 0.00 | 35.16 | H | 50.28 | 53.98 | 3.70 | AV |
| 2390.0 | 27.48 | 0.00 | 35.16 | V | 62.64 | 73.98 | 11.34 | PK |
| 2390.0 | 15.24 | 0.00 | 35.16 | V | 50.39 | 53.98 | 3.59 | AV |
| 2483.5 | 28.19 | 0.00 | 35.36 | H | 63.54 | 73.98 | 10.44 | PK |
| 2483.5 | 15.02 | 0.00 | 35.36 | H | 50.37 | 53.98 | 3.61 | AV |
| 2483.5 | 27.67 | 0.00 | 35.36 | V | 63.03 | 73.98 | 10.95 | PK |
| 2483.5 | 14.92 | 0.00 | 35.36 | V | 50.28 | 53.98 | 3.70 | AV |

▣ Test Plots

Radiated Restricted Band Edges plot – Average Reading (802.11n (HT20) Ch.12)



Radiated Restricted Band Edges plot – Peak Reading (802.11n (HT20) Ch.12)



Note:

Plot of worst case are only reported.

9.8 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

| Frequency | Reading | Ant. factor | Cable loss | Ant. POL | Total | Limit | Margin |
|-----------|---------|-------------|------------|----------|--------|--------|--------|
| MHz | dBuV/m | dBm/m | dBm | (H/V) | dBuV/m | dBuV/m | dB |

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

| Frequency | Reading | Ant. factor | Cable loss | Ant. POL | Total | Limit | Margin |
|-----------|---------|-------------|------------|----------|--------|--------|--------|
| MHz | dBuV/m | dBm/m | dBm | (H/V) | dBuV/m | dBuV/m | dB |

No Critical peaks found

10. LIST OF TEST EQUIPMENT

Conducted Test

| Manufacturer | Model / Equipment | Calibration Date | Calibration Interval | Serial No. |
|-----------------|----------------------------------------------|------------------|----------------------|------------|
| Rohde & Schwarz | ENV216 / LISN | 09/04/2020 | Annual | 102245 |
| Rohde & Schwarz | ESCI / Test Receiver | 09/16/2020 | Annual | 101910 |
| ESPAC | SU-642 / Temperature Chamber | 03/15/2021 | Annual | 0093008124 |
| Agilent | N9020A / Signal Analyzer | 04/16/2021 | Annual | MY50210191 |
| Agilent | N9030A / Signal Analyzer | 01/11/2021 | Annual | MY49431210 |
| Agilent | N1911A / Power Meter | 04/08/2021 | Annual | MY45100523 |
| Agilent | N1921A / Power Sensor | 04/08/2021 | Annual | MY57820067 |
| Agilent | 87300B / Directional Coupler | 11/10/2020 | Annual | 3116A03621 |
| Hewlett Packard | 11667B / Power Splitter | 02/09/2021 | Annual | 10545 |
| Hewlett Packard | E3632A / DC Power Supply | 06/10/2021 | Annual | KR75303960 |
| Weinschel | 2-20 / Attenuator(20 dB) | 10/07/2020 | Annual | BR0592 |
| Rohde & Schwarz | EMC32 / Software | N/A | N/A | N/A |
| HCT CO., LTD. | FCC WLAN&BT&BLE Conducted Test Software v3.0 | N/A | N/A | N/A |
| Rohde & Schwarz | CBT / Bluetooth Tester | 05/04/2021 | Annual | 100422 |

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

| Manufacturer | Model / Equipment | Calibration Date | Calibration Interval | Serial No. |
|------------------------|---------------------------------------------------------|------------------|----------------------|-------------|
| Innco system | CO3000 / Controller(Antenna mast) | N/A | N/A | CO3000-4p |
| Innco system | MA4640/800-XP-EP / Antenna Position Tower | N/A | N/A | N/A |
| Emco | 2090 / Controller | N/A | N/A | 060520 |
| Ets | Turn Table | N/A | N/A | N/A |
| Rohde & Schwarz | Loop Antenna | 03/19/2020 | Biennial | 1513-333 |
| Schwarzbeck | VULB 9168 / Hybrid Antenna | 09/04/2020 | Biennial | 9168-0895 |
| Schwarzbeck | BBHA 9120D / Horn Antenna | 11/18/2019 | Biennial | 9120D-1191 |
| Schwarzbeck | BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz) | 11/29/2019 | Biennial | BBHA9170541 |
| Rohde & Schwarz | FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer | 09/14/2020 | Annual | 836650/016 |
| Rohde & Schwarz | FSV40-N / Spectrum Analyzer | 09/22/2020 | Annual | 101068-SZ |
| Wainwright Instruments | WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter | 01/06/2021 | Annual | 2 |
| Wainwright Instruments | WRCJV5100/5850-40/50-8EEK / Band Reject Filter | 02/08/2021 | Annual | 1 |
| CERNEX | CBLU1183540B-01/Broadband Bench Top LNA | 12/23/2020 | Annual | N/A |
| WEINSCHEL | 56-10 / Attenuator(10 dB) | | | |
| CERNEX | CBL06185030 / Broadband Low Noise Amplifier | 12/23/2020 | Annual | N/A |
| Api tech. | 18B-03 / Attenuator (3 dB) | | | |
| Wainwright Instruments | WHKX10-2700-3000-18000-40SS / High Pass Filter | 12/23/2020 | Annual | N/A |
| Wainwright Instruments | WHKX8-6090-7000-18000-40SS / High Pass Filter | 12/23/2020 | Annual | N/A |
| T&M SYSTEM | COAXIAL ATTENUATOR / Thru | 12/23/2020 | Annual | N/A |
| CERNEX | CBL18265035 / Power Amplifier | 12/04/2020 | Annual | 22966 |
| CERNEX | CBL26405040 / Power Amplifier | 03/23/2021 | Annual | 25956 |
| TESCOM | TC-3000C / Bluetooth Tester | 03/09/2021 | Annual | 3000C000276 |

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description |
|-----|---------------------|
| 1 | HCT-RF-2106-FI007-P |