

On your side

**HCT**

# TEST REPORT

FCC/IC DTS Test for ETWFAEWC01

Certification

**APPLICANT**

LG Innotek Co., Ltd.

**REPORT NO.**

HCT-RF-2004-FI001

**DATE OF ISSUE**

April 20, 2020

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 634 6300 F ax. +82 31 645 6401

## TEST REPORT

FCC/IC DTS Test for  
ETWFAEWC01

**REPORT NO.**  
HCT-RF-2004-FI001  
**DATE OF ISSUE**  
20 April 2020  
**Additional Model**  
-

<b>Applicant</b>	LG Innotek Co., Ltd. 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
<b>EUT Type Model Name</b>	RF Module ETWFAEWC01
<b>FCC ID</b>	YZP-ETWFAEWC01
<b>IC</b>	7414C-ETWFAEWC01
<b>Max. RF Output Power</b>	802.11b : 25.99 dBm / 802.11g : 24.49 dBm / 802.11n(HT20) : 23.65 dBm 802.11n(HT40): 24.00 dBm
<b>Modulation type</b>	CCK/DSSS/OFDM
<b>FCC Classification</b>	Digital Transmission System(DTS)
<b>FCC Rule Part(s)</b>	Part 15.247
<b>ISED Rule Part(s)</b>	RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 1 (March 2019)

This test results were applied only to the test methods required by the standard.

**Tested by**  
Jeong Ho Kim

(signature)



**Technical Manager**  
Jong Seok Lee

(signature)



(signature)  
HCT CO., LTD.  
*Soo Chan Lee*  
SooChan Lee / CEO

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 20, 2020	Initial Release

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance

## CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	29
9. TEST RESULT	31
9.1 DUTY CYCLE	31
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	34
9.3 OUTPUT POWER	42
9.4 POWER SPECTRAL DENSITY	46
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	49
9.6 RADIATED SPURIOUS EMISSIONS	64
9.7 RADIATED RESTRICTED BAND EDGES	75
9.8 RECEIVER SPURIOUS EMISSIONS	83
9.9 POWERLINE CONDUCTED EMISSIONS	84
10. LIST OF TEST EQUIPMENT	88
11. ANNEX A_ TEST SETUP PHOTO	90

## 1. EUT DESCRIPTION

Model	ETWFAEWC01
Additional Model	-
EUT Type	RF Module
Power Supply	DC 12.0 V
Frequency Range	802.11b, g, n(HT20): 2 412 MHz – 2 462 MHz 802.11n(HT40): 2 422 MHz – 2 452 MHz
Factory	PT. LG INNOTEK INDONESIA Bekasi International Industrial Estate, Blok C8 NO. 12 & 12 A, Desa Cibatu, Cikarang Selatan, Bekasi 17750 – Indonesia
Manufacturer	LG Innotek Co., Ltd. 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Max. RF Output Power	<b>Peak Power</b> 802.11b : 25.99 dBm 802.11g : 24.49 dBm 802.11n(HT20) : 23.65 dBm 802.11n(HT40): 24.00 dBm <b>Average Power</b> 802.11b: 18.90 dBm 802.11g: 16.66 dBm 802.11n(HT20): 15.64 dBm 802.11n(HT40): 15.70 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
Number of Channels	802.11b/g/n(20M) : 11 Channels (1,2,3,4,5,6,7,8,9,10,11) 802.11n(40M) : 7 Channels (3,4,5,6,7,8,9)
Antenna Specification	Antenna type: External PCB Antenna Peak Gain : 1.50 dBi
Date(s) of Tests	March 23, 2020 ~ April 09, 2020
PMN (Product Marketing Number)	RF Module
HVIN (Hardware Version Identification Number)	ETWFAEWC01
FVIN (Firmware Version Identification Number)	V0.0.2
HMN (Host Marketing Name)	N/A

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.” The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

- The E.U.T Complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05



## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

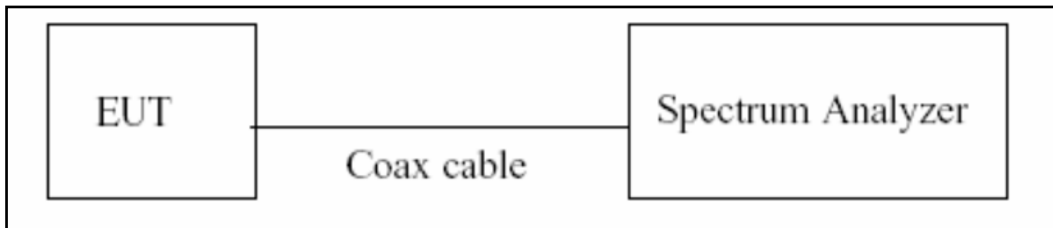

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/Duty\ Cycle)$

## 7.2. 6dB Bandwidth & 99 % Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

### Test Procedure (99 % Bandwidth for IC)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW  $\cong 3 \times$  RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
  - : Measure the peak power of the transmitter.
  
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation

- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

Note :


1. The Output power results for Reading value is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Span = 1.5 times the DTS channel bandwidth.
- (3)  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- (4)  $\text{VBW} \geq 3 \times \text{RBW}$ .
- (5) Sweep = auto couple
- (6) Detector = peak
- (7) Trace Mode = max hold
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss

Note :

1. The PSD results for Reading value in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss

## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions


### Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least

30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	10.09
100	10.12
200	10.17
300	10.22
400	10.25
500	10.26
600	10.26
700	10.28
800	10.29
900	10.31
1000	10.32
2000	10.46
2400	10.50
2480	10.52
2500	10.52
3000	10.57
4000	10.65
5000	10.76
5150	10.76
5850	10.78
6000	10.78
7000	10.85
8000	10.90
9000	10.96
10000	11.02
11000	11.07
12000	11.15
13000	11.24
14000	11.21
15000	11.26
16000	11.27
17000	11.30
18000	11.35
19000	11.37
20000	11.41
21000	11.53
22000	11.60
23000	11.60
24000	11.64
25000	11.73
26000	11.74

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(10 dB) + Cable loss(1ea)

## 7.6. Radiated Test

### FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

### IC


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

### FCC&IC


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

## Test Configuration

Below 30 MHz

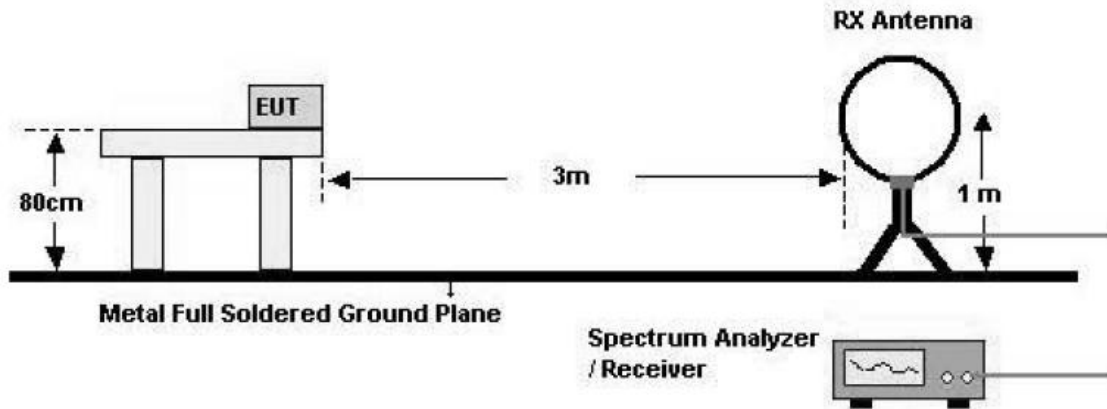


30 MHz - 1 GHz

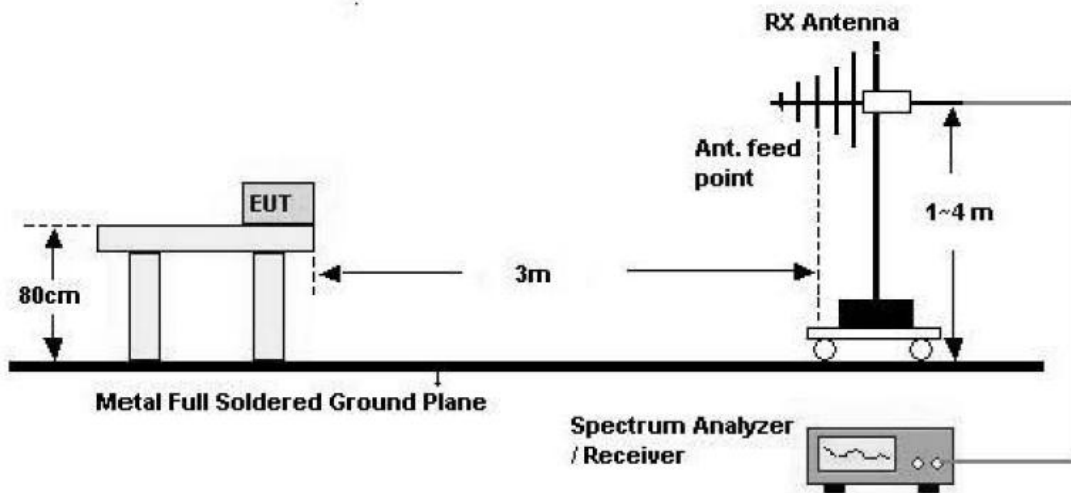



Above 1 GHz

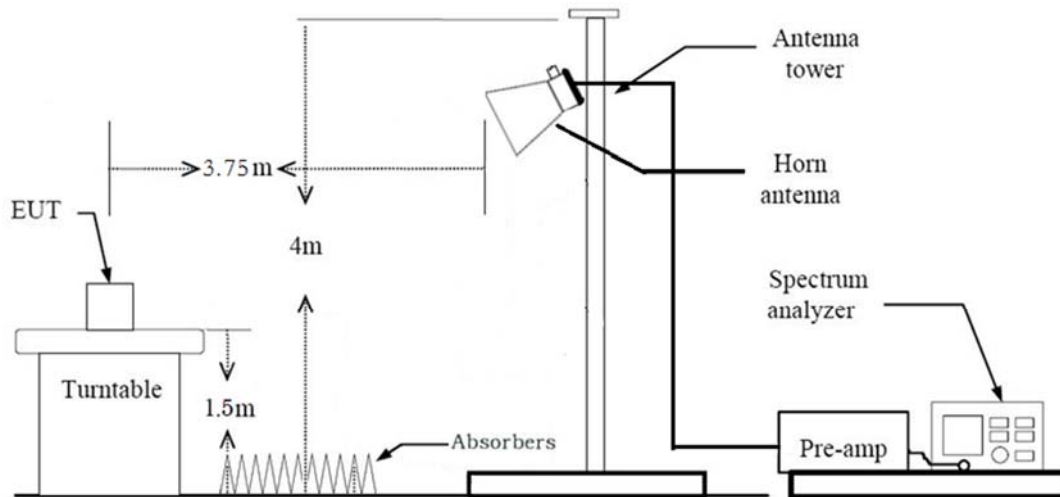

### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

#### **KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

#### **Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

#### 5. Spectrum Setting

##### (1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

##### (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

#### 6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

7. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

### **Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average): Duty cycle  $\geq$  98%
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
  - (3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$ 
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz

- $VBW \geq 3 \times RBW$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

+ Duty Cycle Factor

### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20 \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both

horizontal and vertical.

8. The unit was tested with its standard battery.

9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Average): Duty cycle  $\geq$  98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G)  
+Attenuator(ATT)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G)  
+Attenuator(ATT)

Total(Measurement Type : Average, Duty cycle  $<$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G)  
+Attenuator(ATT) + Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.8. Receiver Spurious Emissions

### Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

### Test Configuration

30 MHz - 1 GHz

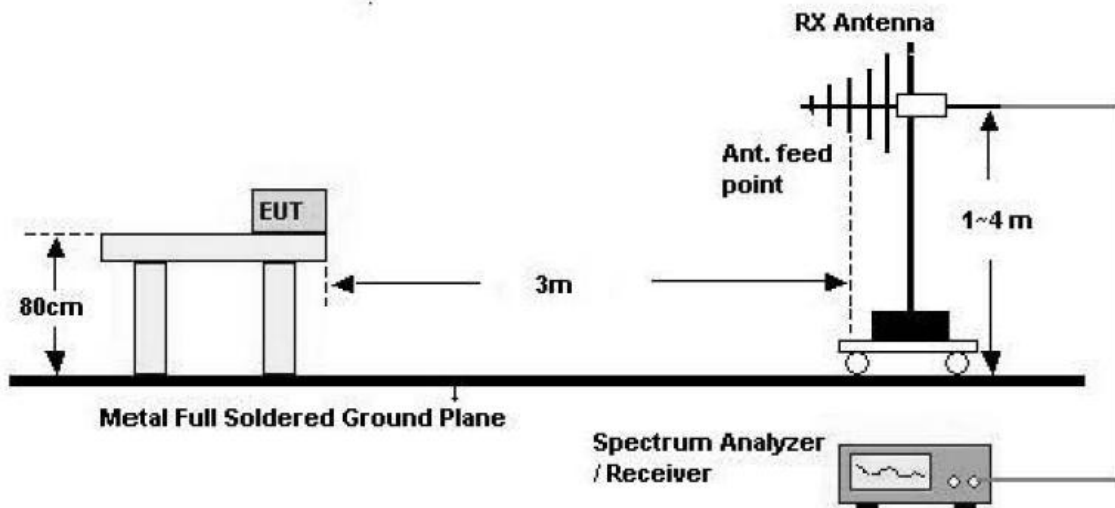




### Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

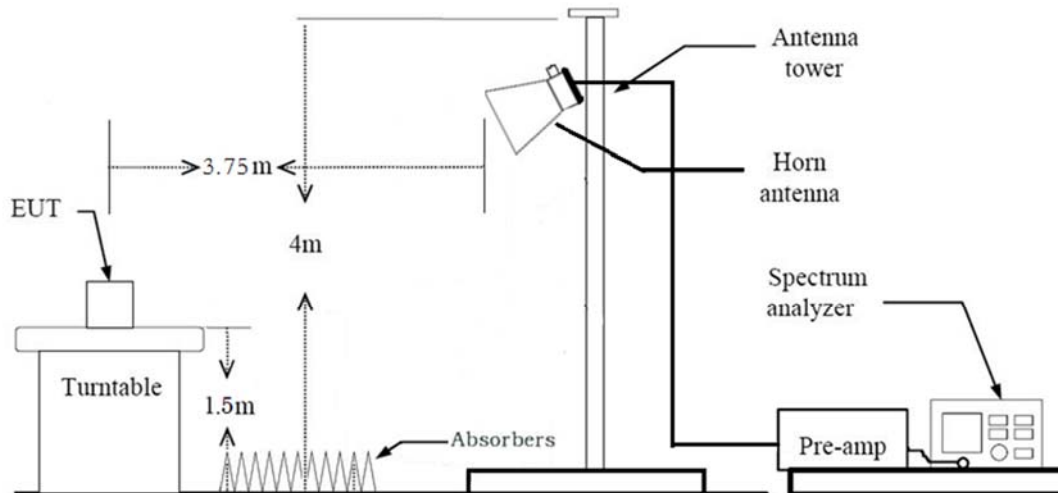

### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20 \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds

The actual setting value of VBW = 1 kHz

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## 7.9. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone
  - Worstcase : Stand alone
2. EUT Axis
  - Radiated Spurious Emissions : X-V
  - Radiated Restricted Band Edge : Y-V
3. 100% continuous signal. Not add the Duty cycle factor
4. All data rate of operation were investigated and the test results are worst case in lowest data rate of each mode.
  - 802.11b
  - 802.11g
  - 802.11n\_HT20
  - 802.11n\_HT40
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

- Worstcase : Stand alone
1. This module operation for obtaining power through another device which is connected to the AC power line.
  2. We tested by supplying DC 12 [V] to the module using an AC power adapter that is commercially available.

### Conducted test

1. The EUT was configured with data rate of highest power.

## 8. SUMMARY TEST OF RESULTS

### FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

**IC Part**

Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		N/A (Note1)
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6		Radiated
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8	PASS	
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6	PASS	

## 9. TEST RESULT

### 9.1 DUTY CYCLE


Mode	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1.0	1.0	1.0	0.0
802.11g	1.0	1.0	1.0	0.0
802.11n (HT20)	1.0	1.0	1.0	0.0
802.11n (HT40)	1.0	1.0	1.0	0.0

**Note:**


1. Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$ . where, Duty Cycle =  $T_{\text{on}} / T_{\text{total}}$
2. Test was performed with 100% continuous Tx.

▣ Test Plots

Duty cycle plot (802.11b(1Mbps))

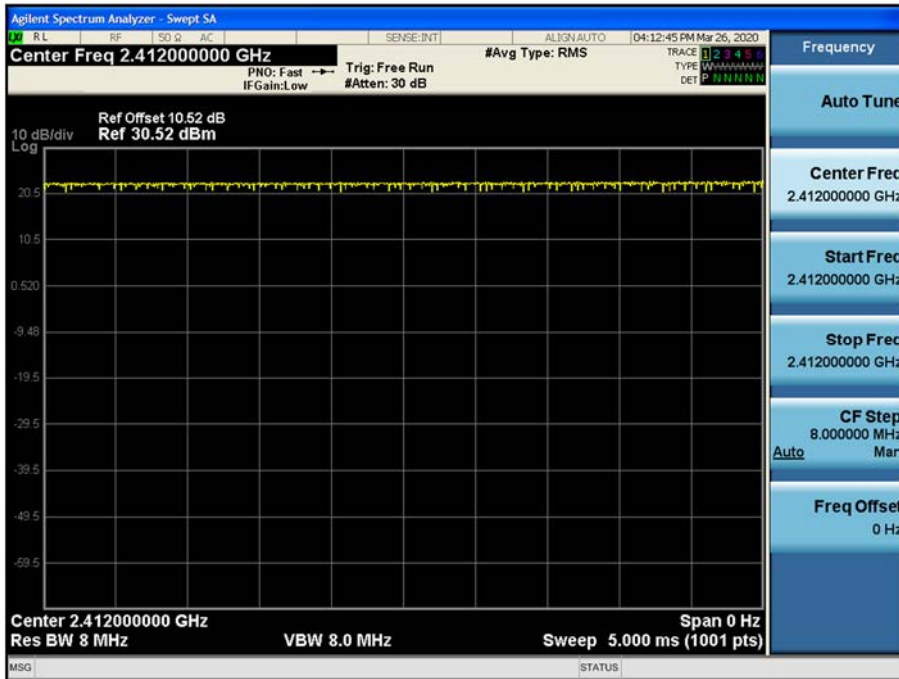


Duty cycle plot (802.11g(6Mbps))

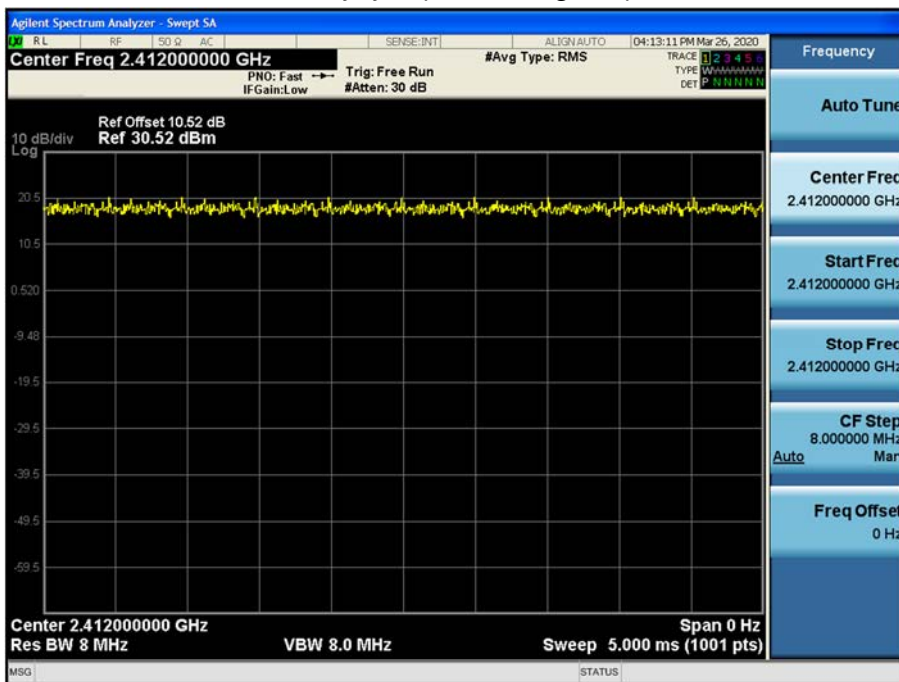




Duty cycle plot (802.11n(HT20)(MCS0))

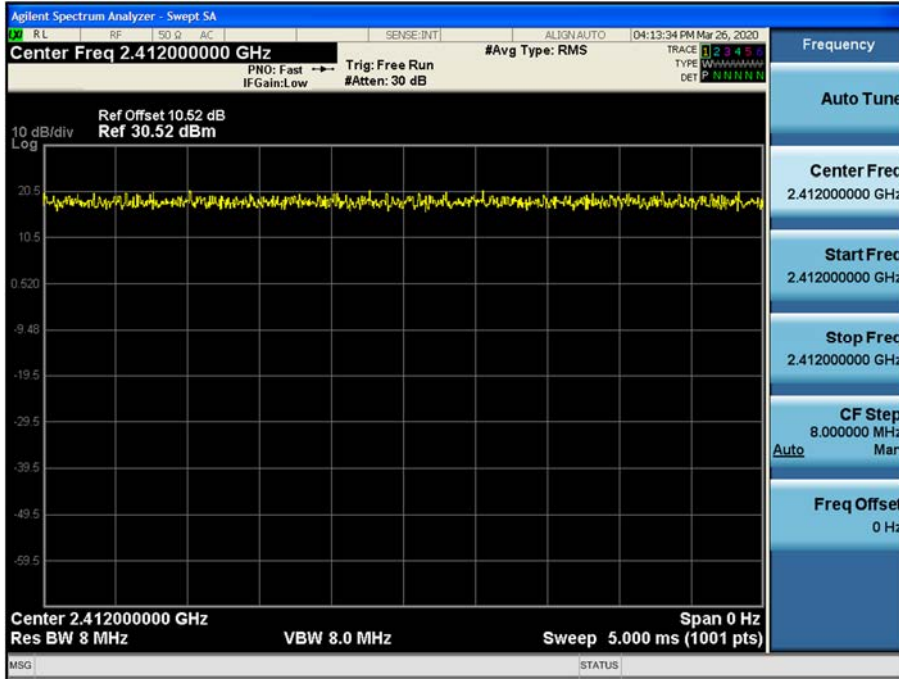

Duty cycle plot (802.11n(HT40)(MCS0))

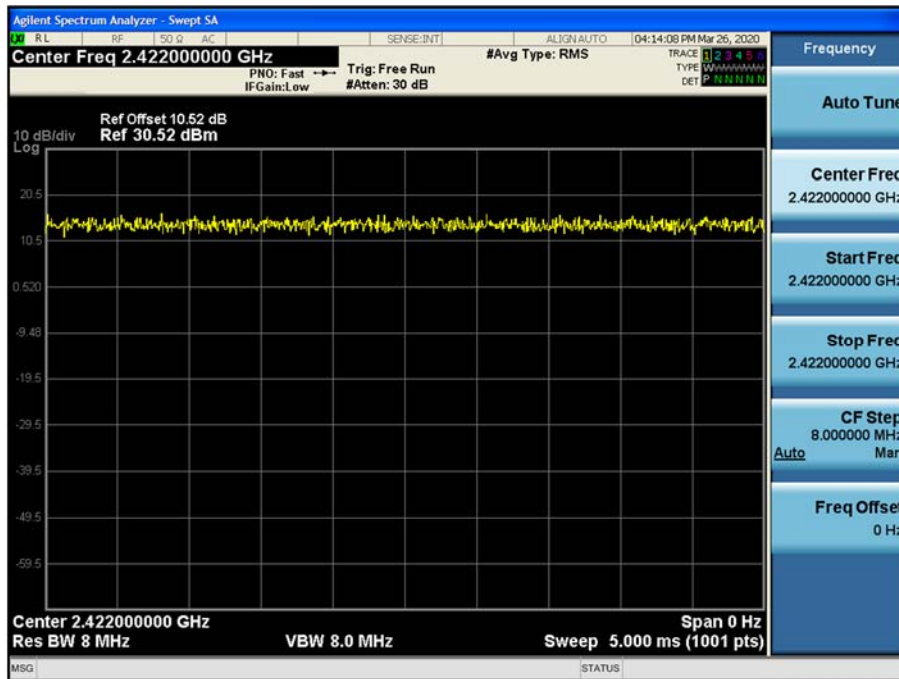

**Note:**

In order to simplify the report, attached plots were only the most lowest data rate.

## 9.2 6dB BANDWIDTH & 99 % BANDWIDTH

### FCC

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	9.155	0.5
2437	6	8.737	0.5
2462	11	8.734	0.5


802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.38	0.5
2417	2	16.38	0.5
2437	6	16.38	0.5
2457	10	16.38	0.5
2462	11	16.38	0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.93	0.5
2417	2	16.91	0.5
2437	6	16.92	0.5
2457	10	16.92	0.5
2462	11	16.91	0.5


802.11n(HT40) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.40	0.5
2427	4	36.39	0.5
2437	6	36.38	0.5
2447	8	36.38	0.5
2452	9	36.38	0.5

▣ Test Plots


6dB Bandwidth plot (802.11b-CH 11)

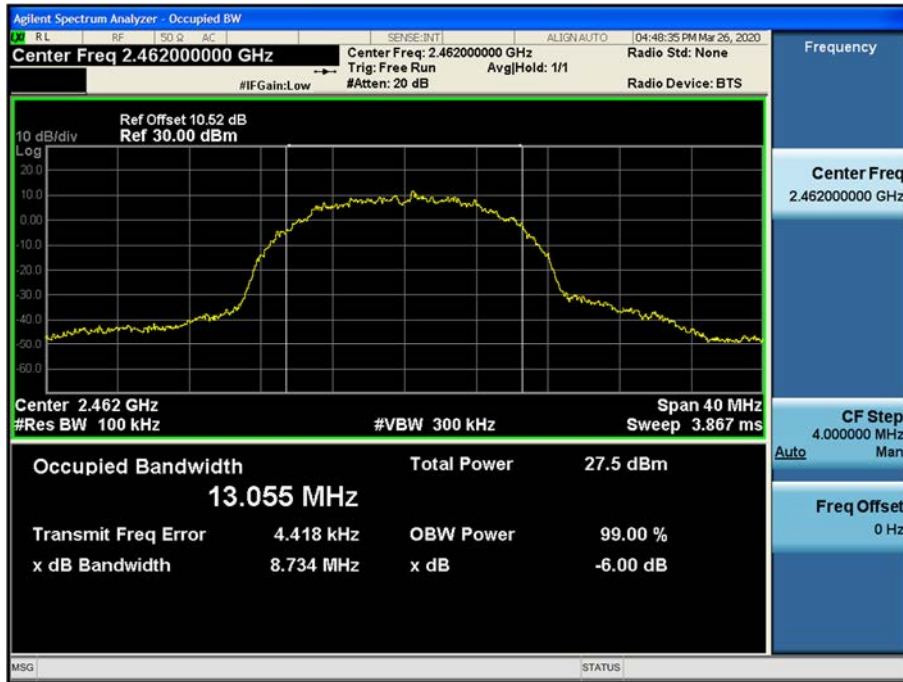

6dB Bandwidth plot (802.11g-CH 2)

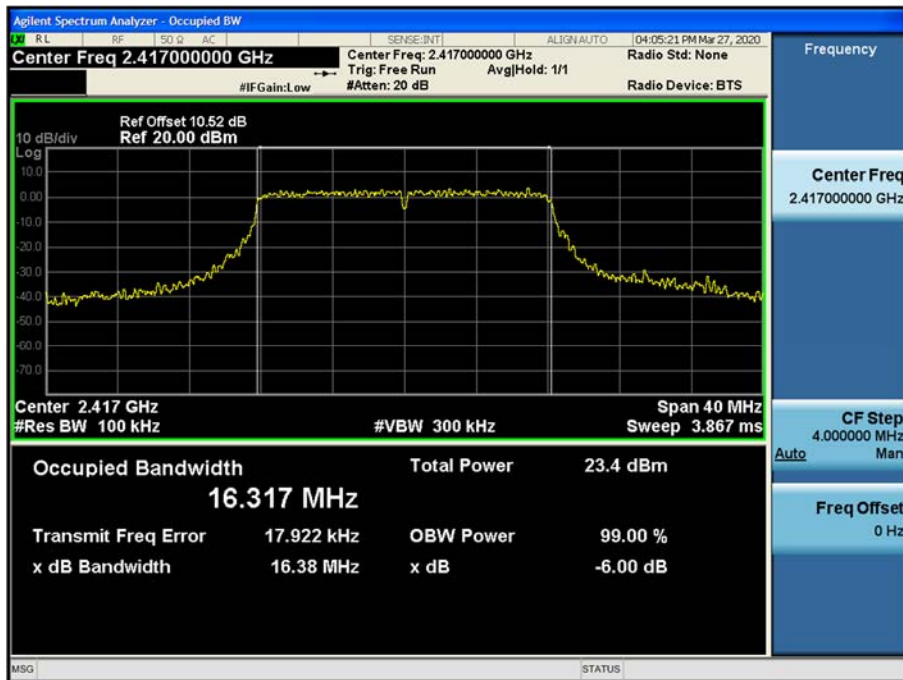

6dB Bandwidth plot (802.11n\_HT20-CH 2)

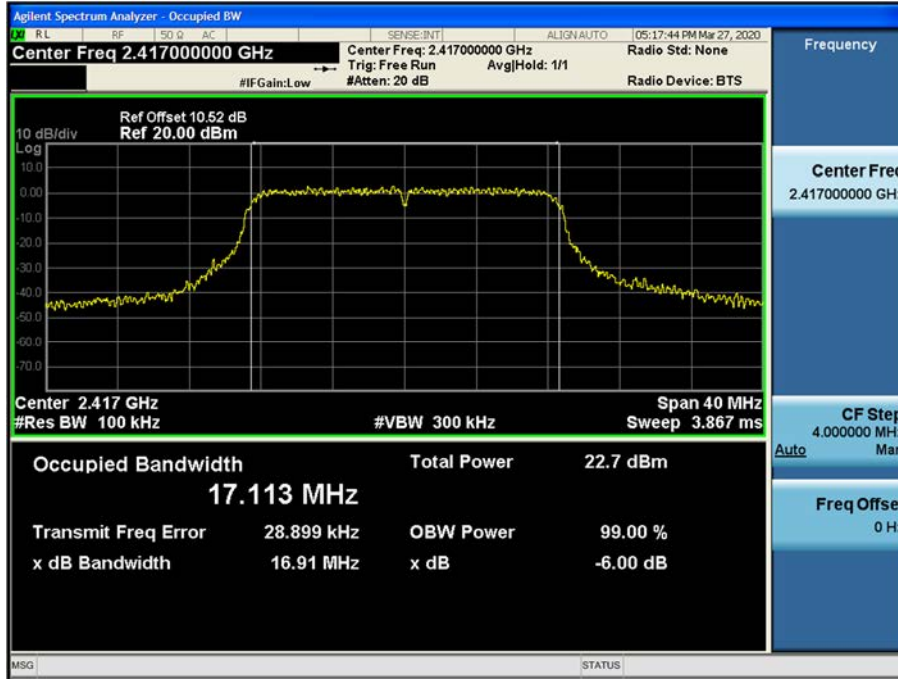

6dB Bandwidth plot (802.11n\_HT40-CH 9)



**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

**99% Bandwidth Measurements(IC)**

802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.075	N/A
2437	6	13.031	N/A
2462	11	13.046	N/A


802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.405	N/A
2417	2	16.412	N/A
2437	6	16.432	N/A
2457	10	16.409	N/A
2462	11	16.398	N/A

802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.116	N/A
2417	2	17.091	N/A
2437	6	17.084	N/A
2457	10	17.087	N/A
2462	11	17.085	N/A


802.11n(HT40) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.120	N/A
2427	4	36.096	N/A
2437	6	36.110	N/A
2447	8	36.097	N/A
2452	9	36.094	N/A

▣ Test Plots

99% Bandwidth plot (802.11b-CH 1)

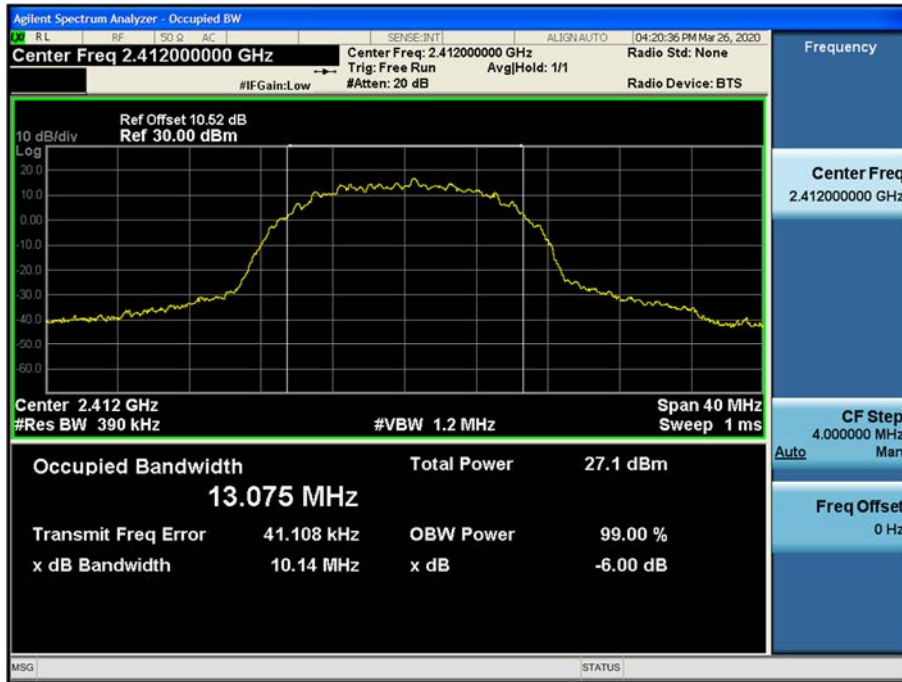

99% Bandwidth plot (802.11g-CH 6)

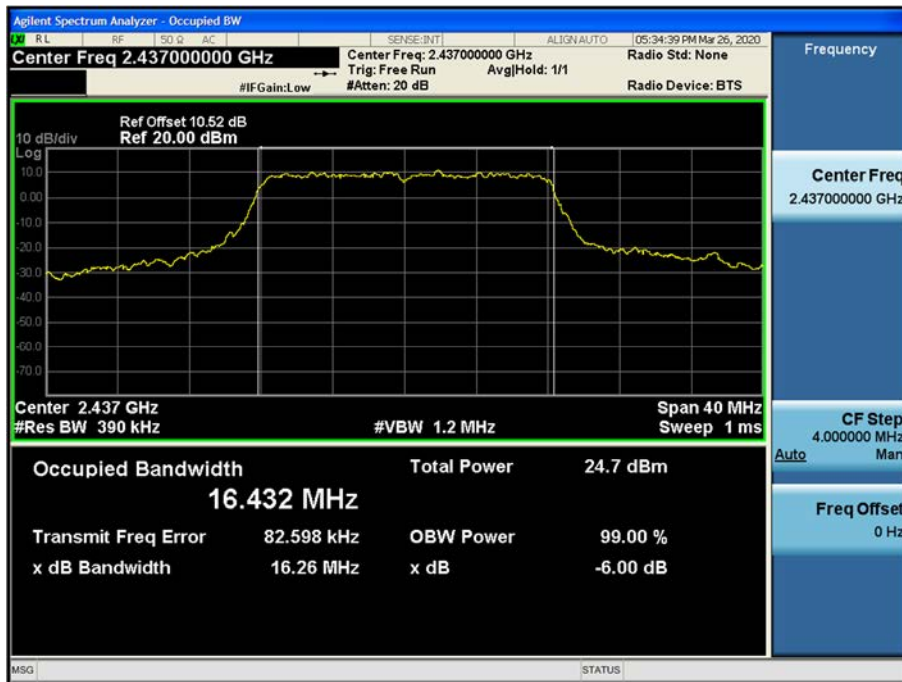



99% Bandwidth plot (802.11n\_HT20-CH 1)



99% Bandwidth plot (802.11n\_HT40-CH 3)



**Note:**

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

### 9.3 OUTPUT POWER

#### Peak Power

1. Power Meter offset = Attenuator loss(10 dB) + Cable loss(1ea)
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 10.52 dB is offset for 2.4 GHz Band

802.11b Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2412	1	25.99	30
2437	6	25.52	30
2462	11	25.58	30

802.11g Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2412	1	23.99	30
2417	2	24.43	30
2437	6	24.49	30
2457	10	24.03	30
2462	11	22.16	30

802.11n(HT20) Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2412	1	23.56	30
2417	2	23.65	30
2437	6	23.39	30
2457	10	23.64	30
2462	11	22.98	30

802.11n(HT40) Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2422	3	23.32	30
2427	4	24.00	30
2437	6	23.98	30
2447	8	23.16	30
2452	9	21.95	30

### Average Power

1. Power Meter offset = Attenuator loss(10 dB) + Cable loss(1ea)
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 10.52 dB is offset for 2.4 GHz Band.
3. All mode 100% continuous signal. Not add the Duty cycle factor

802.11b Mode		Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.				
2412	1	18.90	0.000	18.90	30
2437	6	18.56	0.000	18.56	30
2462	11	18.70	0.000	18.70	30

802.11g Mode		Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.				
2412	1	16.16	0.000	16.16	30
2417	2	16.62	0.000	16.62	30
2437	6	16.66	0.000	16.66	30
2457	10	16.26	0.000	16.26	30
2462	11	14.36	0.000	14.36	30

802.11n(HT20) Mode		Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.				
2412	1	15.54	0.000	15.54	30
2417	2	15.64	0.000	15.64	30
2437	6	15.38	0.000	15.38	30
2457	10	15.63	0.000	15.63	30
2462	11	14.98	0.000	14.98	30

802.11n(HT40) Mode		Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.				
2422	3	14.99	0.000	14.99	30
2427	4	15.70	0.000	15.70	30
2437	6	15.69	0.000	15.69	30
2447	8	14.87	0.000	14.87	30
2452	9	13.66	0.000	13.66	30

#### 9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result	
			Measured PSD (dBm)	Limit (dBm)
802.11b	2412	1	-4.591	8
	2437	6	-4.842	8
	2462	11	-4.331	8
802.11g	2412	1	-10.082	8
	2417	2	-11.046	8
	2437	6	-11.147	8
	2457	10	-11.555	8
	2462	11	-10.910	8
802.11n(HT20)	2412	1	-11.978	8
	2417	2	-12.126	8
	2437	6	-12.366	8
	2457	10	-12.060	8
	2462	11	-11.235	8
802.11n(HT40)	2422	3	-14.533	8
	2427	4	-14.211	8
	2437	6	-14.699	8
	2447	8	-13.348	8
	2452	9	-13.840	8

**Note :**

1. Spectrum reading values are not plot data.


The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(10 dB) + Cable loss(1ea)


3. 10.52 dB is offset for 2.4 GHz Band.

▣ Test Plots


Power Spectral Density (802.11b-CH 11)

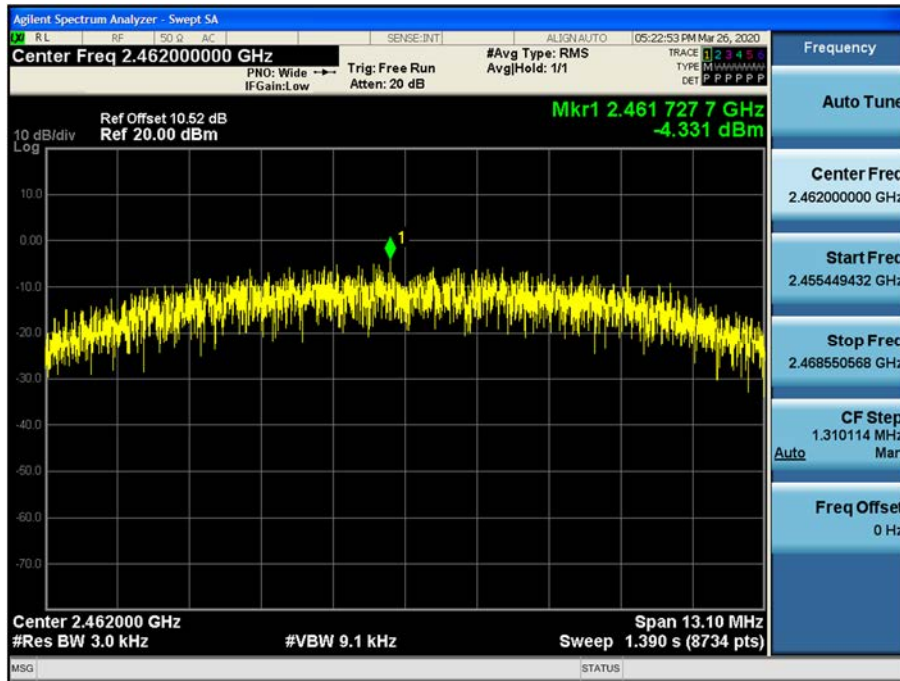


Power Spectral Density (802.11g-CH 1)

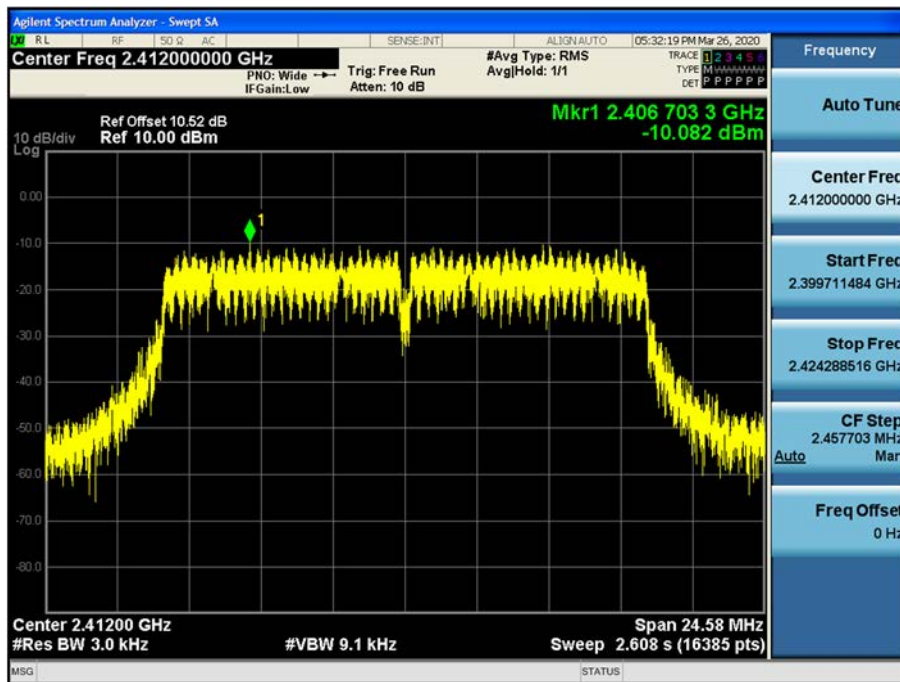

Power Spectral Density (802.11n\_HT20 -CH 11)

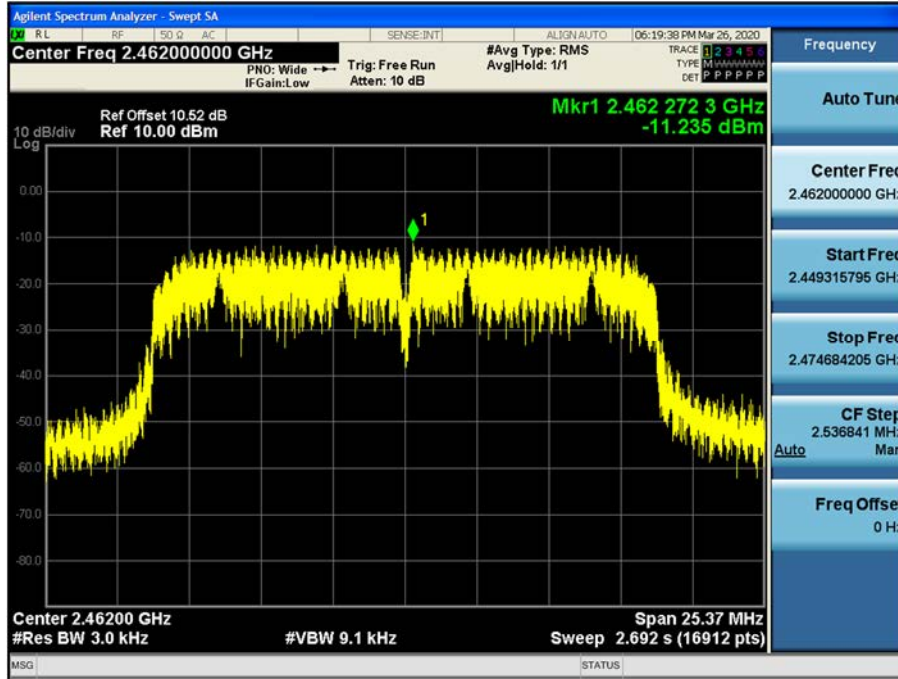

Power Spectral Density (802.11n\_HT40 -CH 8)

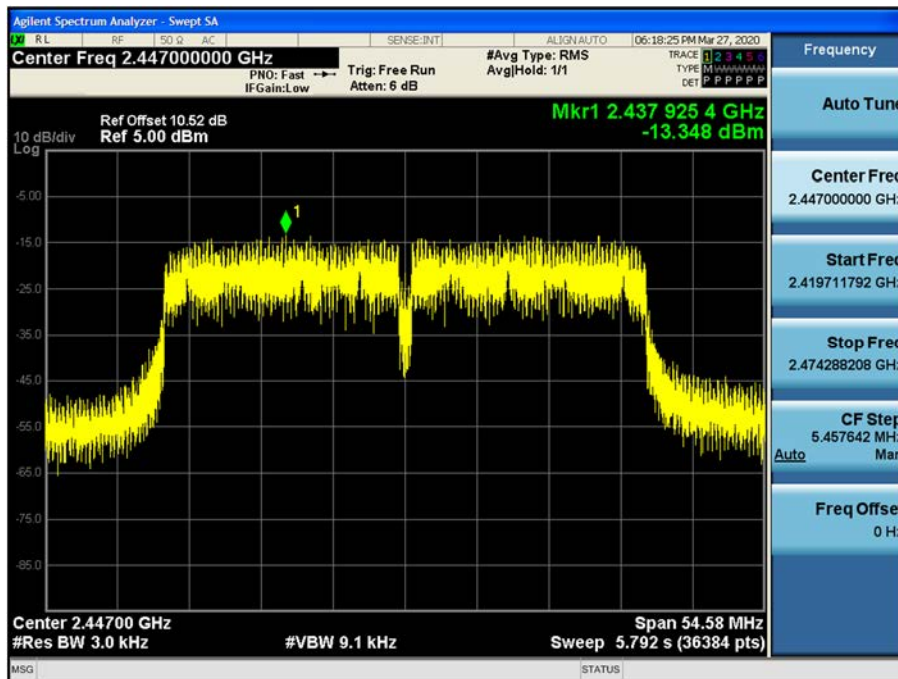

**Note :**

In order to simplify the report, attached plots were only the worstcase PSD channel.




## 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

▣ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

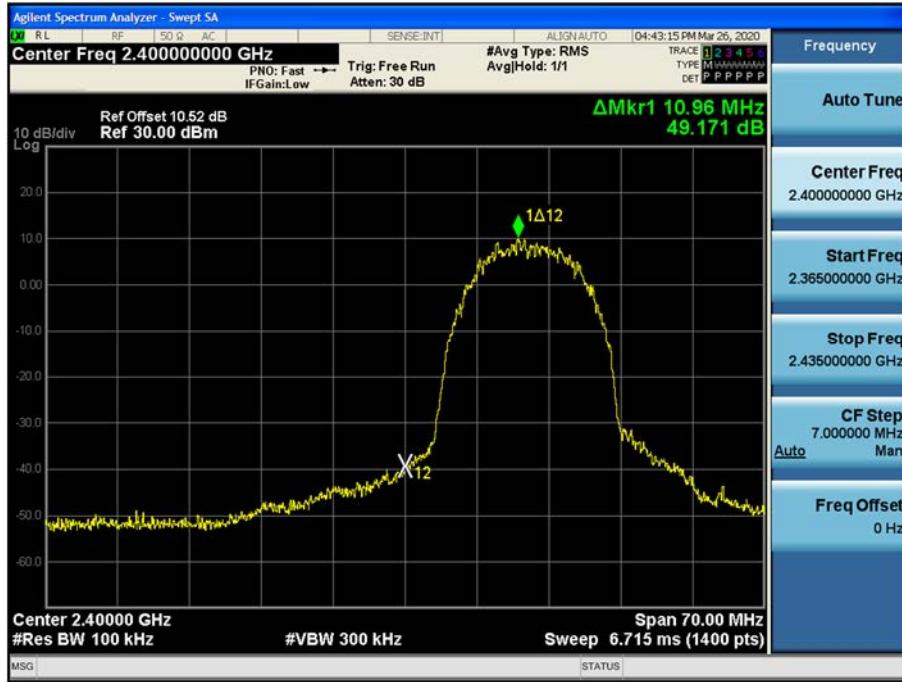


Band Edge (802.11b-CH11)

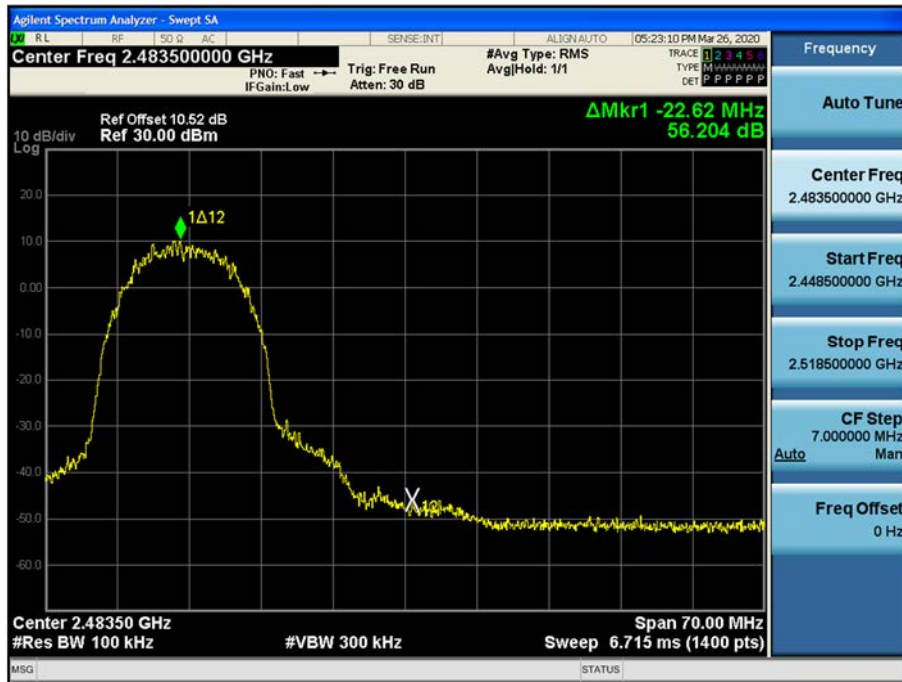

Band Edge (802.11g-CH1)

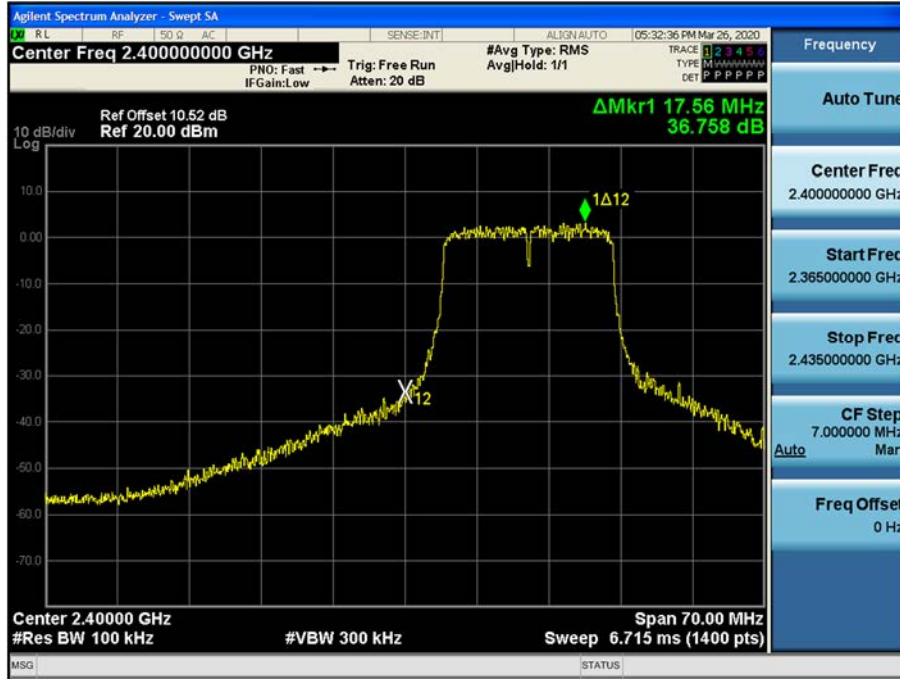

Band Edge (802.11g-CH2)

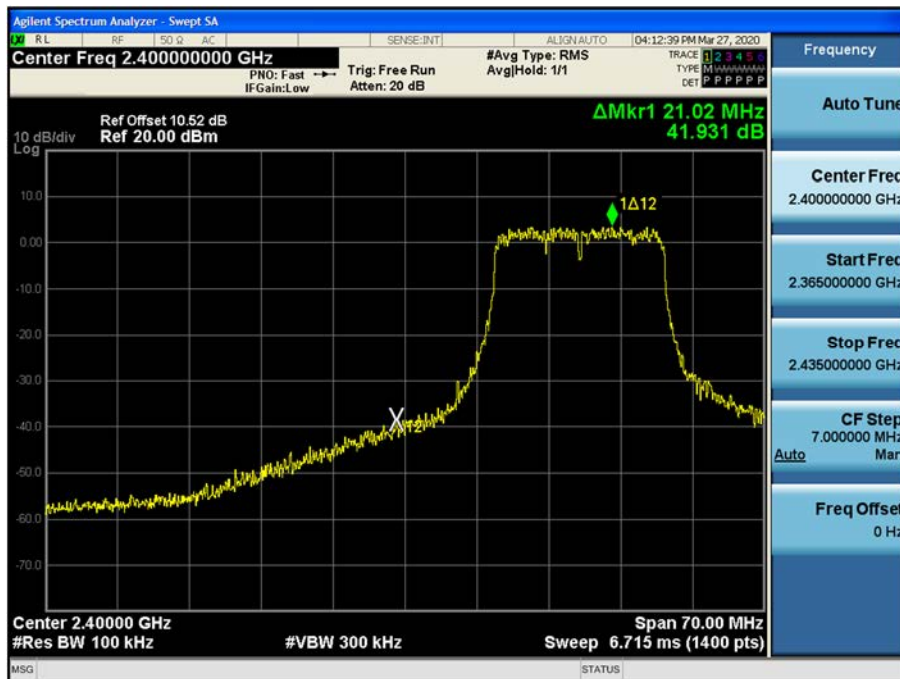


Band Edge (802.11g-CH10)




Band Edge (802.11g-CH11)




Band Edge (802.11n(HT20)-CH1)

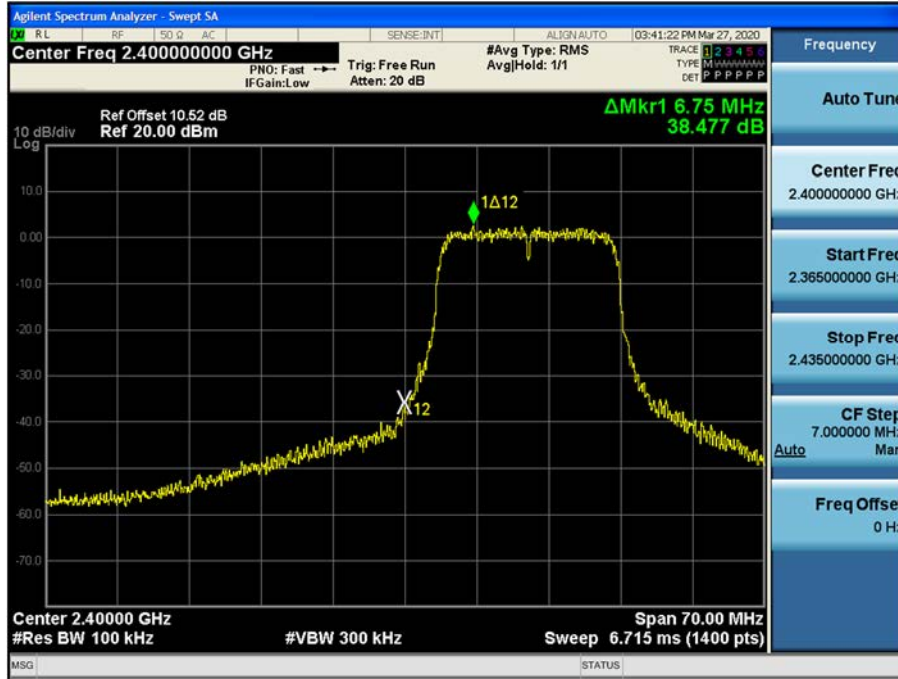


Band Edge (802.11n(HT20)-CH2)

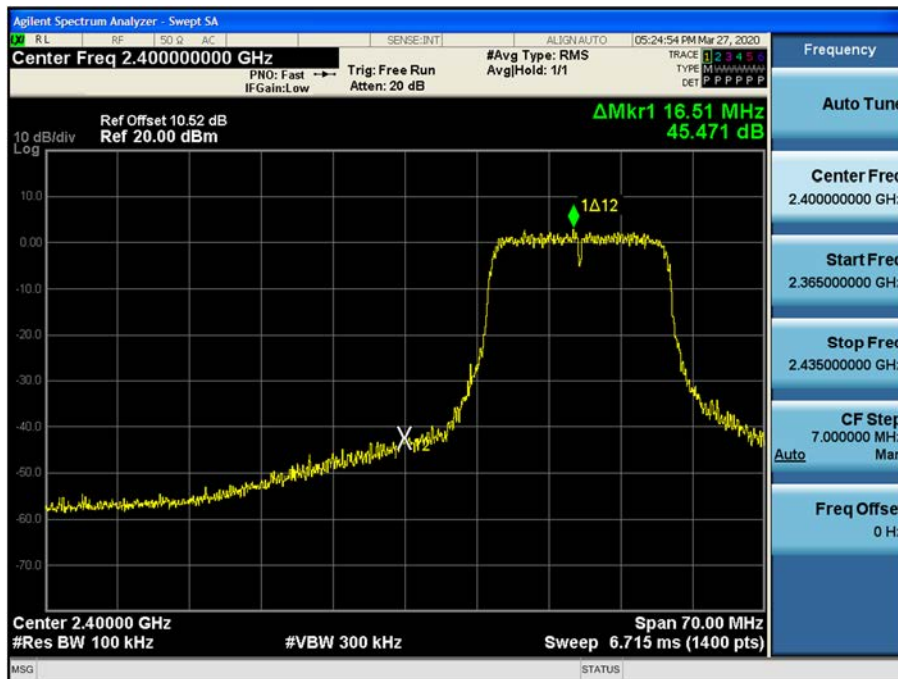


Band Edge (802.11n(HT20)-CH10)

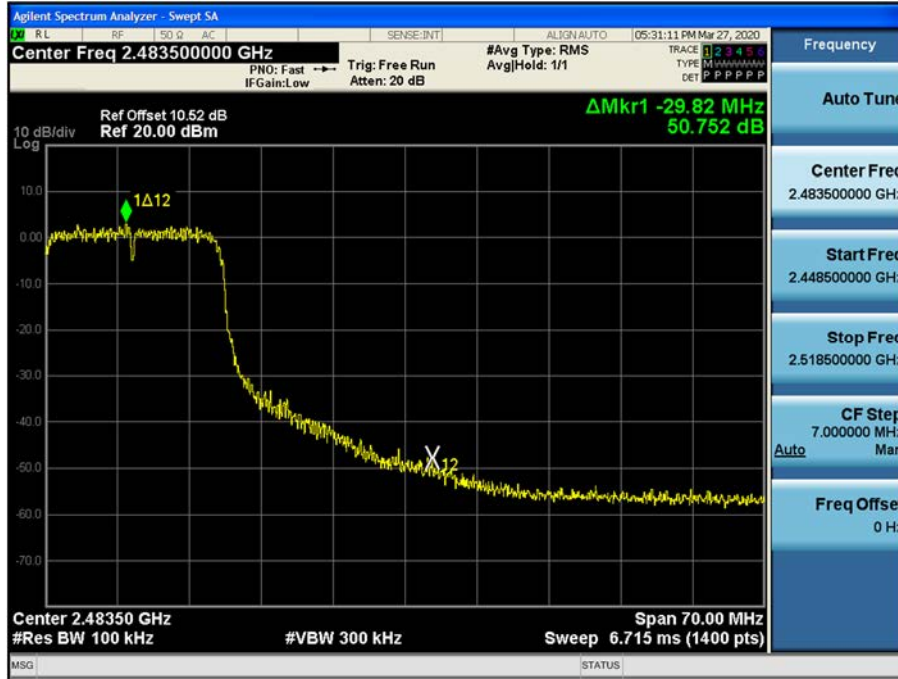


Band Edge (802.11n(HT20)-CH11)

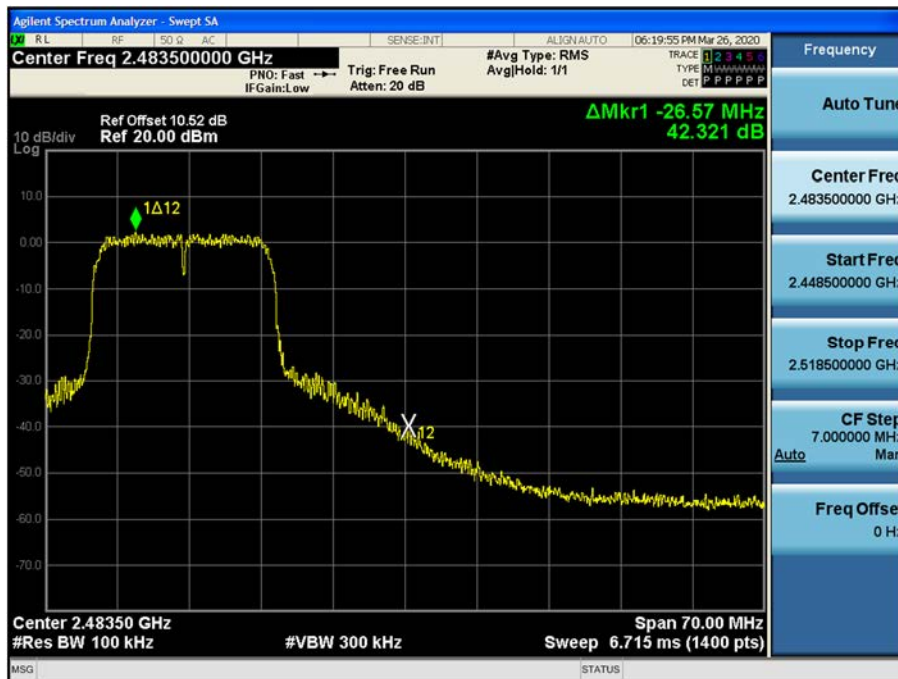


Band Edge (802.11n(HT40)-CH3)

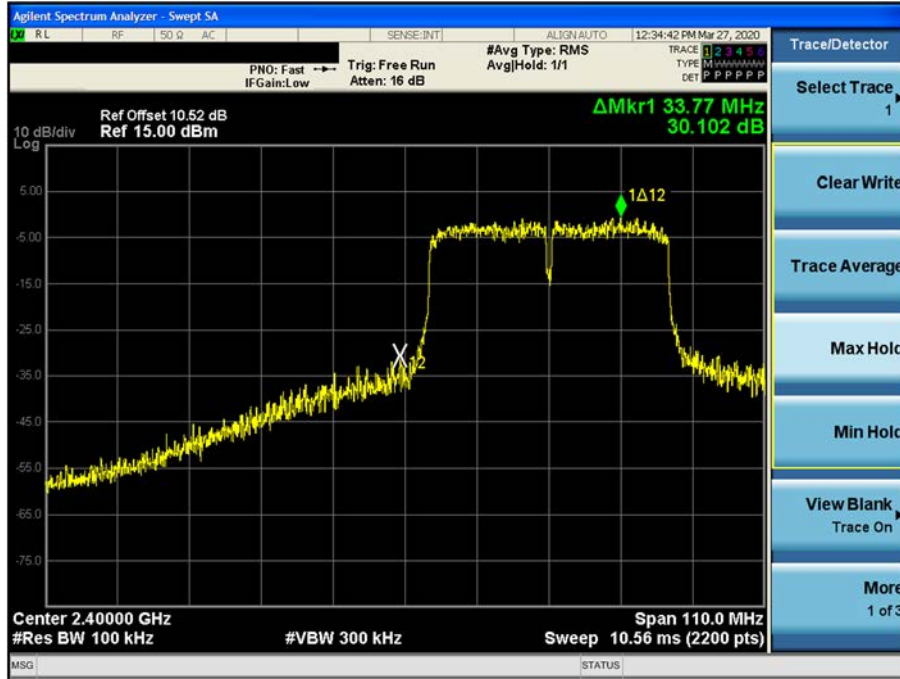

Band Edge (802.11n(HT40)-CH4)

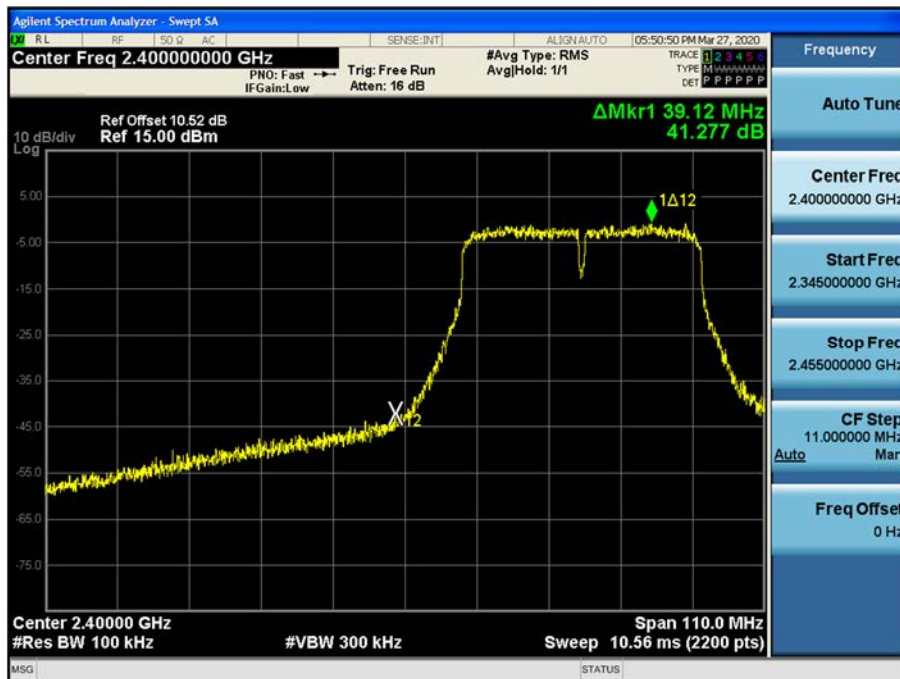

Band Edge (802.11n(HT40)-CH8)

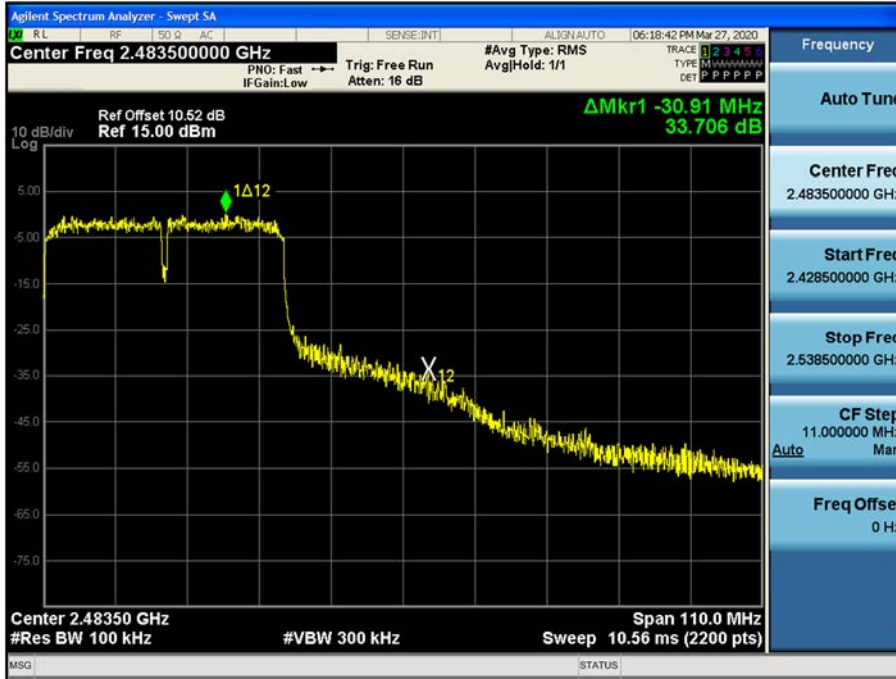

Band Edge (802.11n(HT40)-CH9)






▣ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

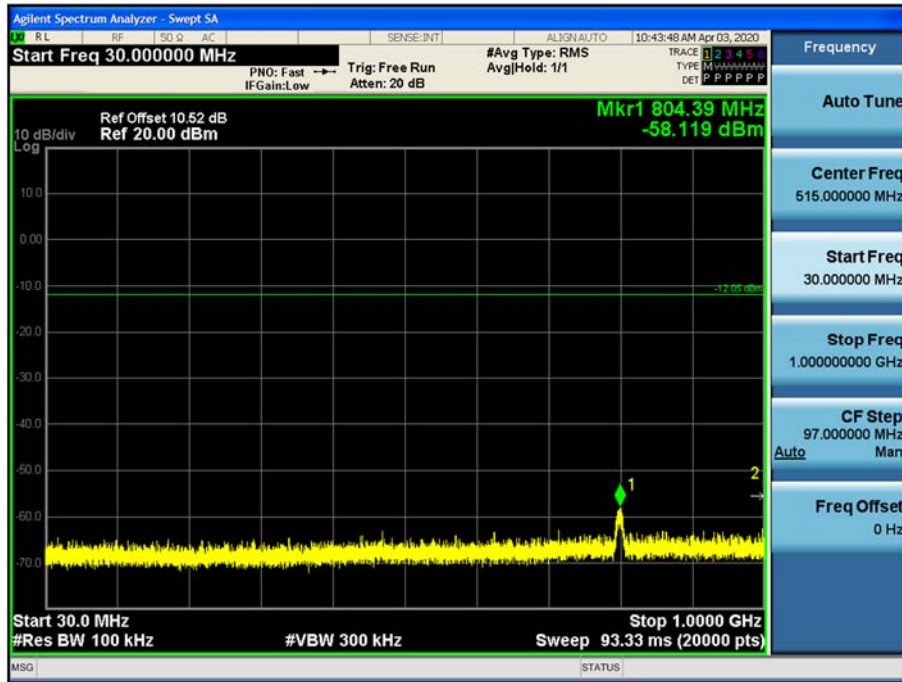


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

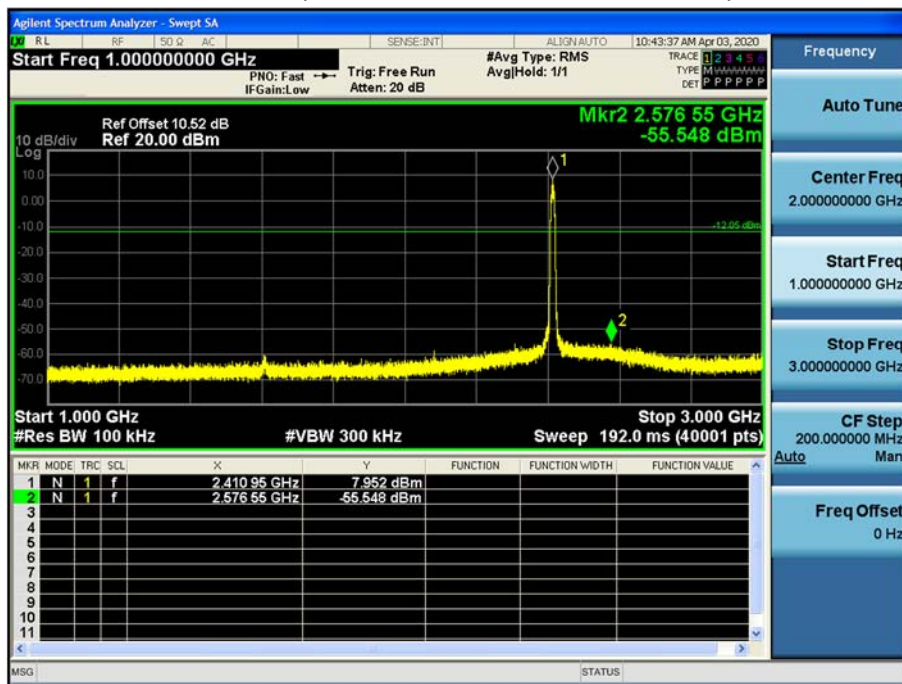


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

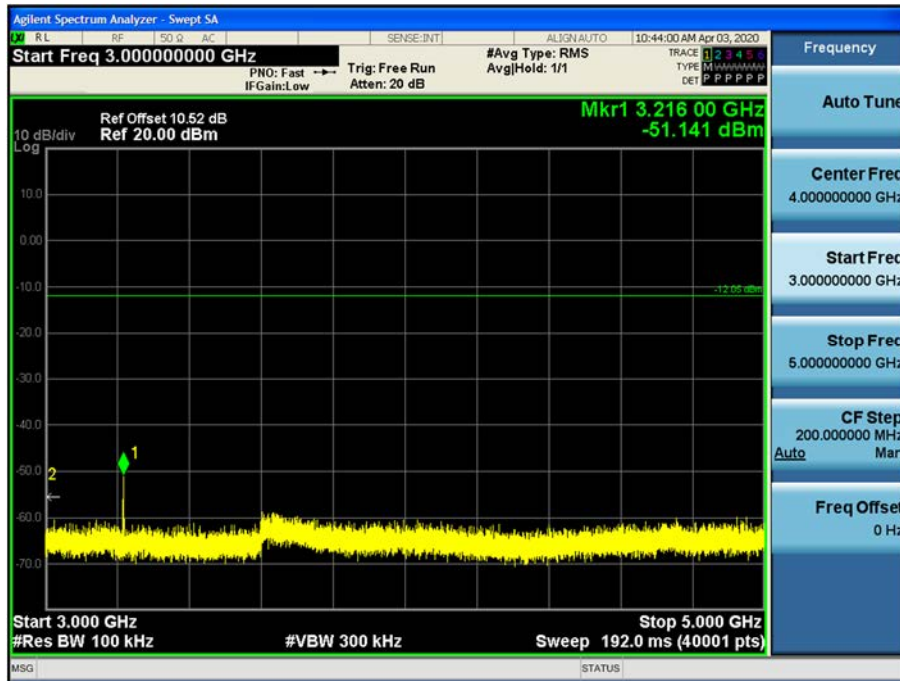


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

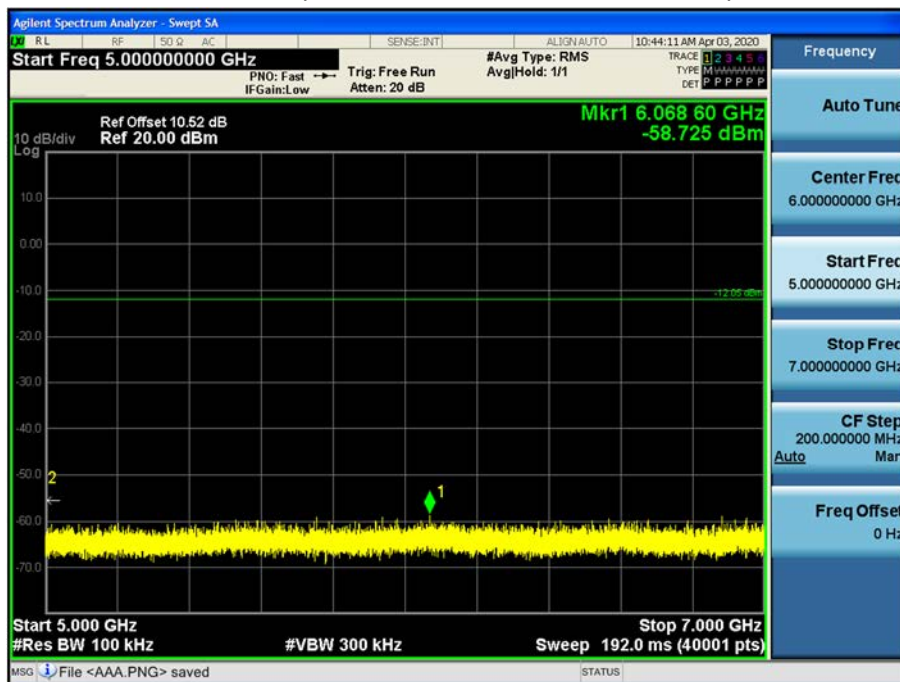


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

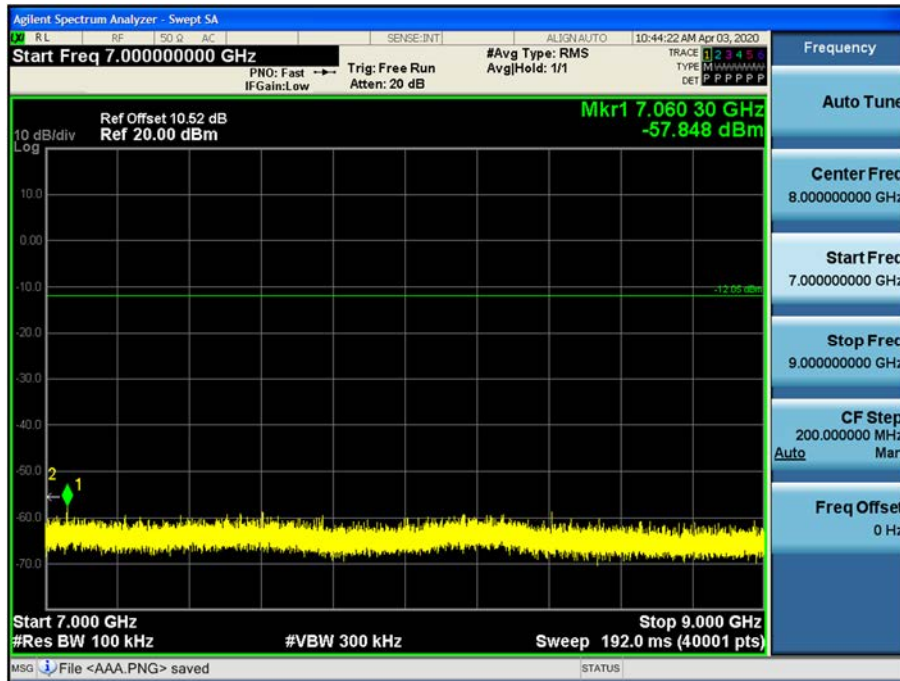


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

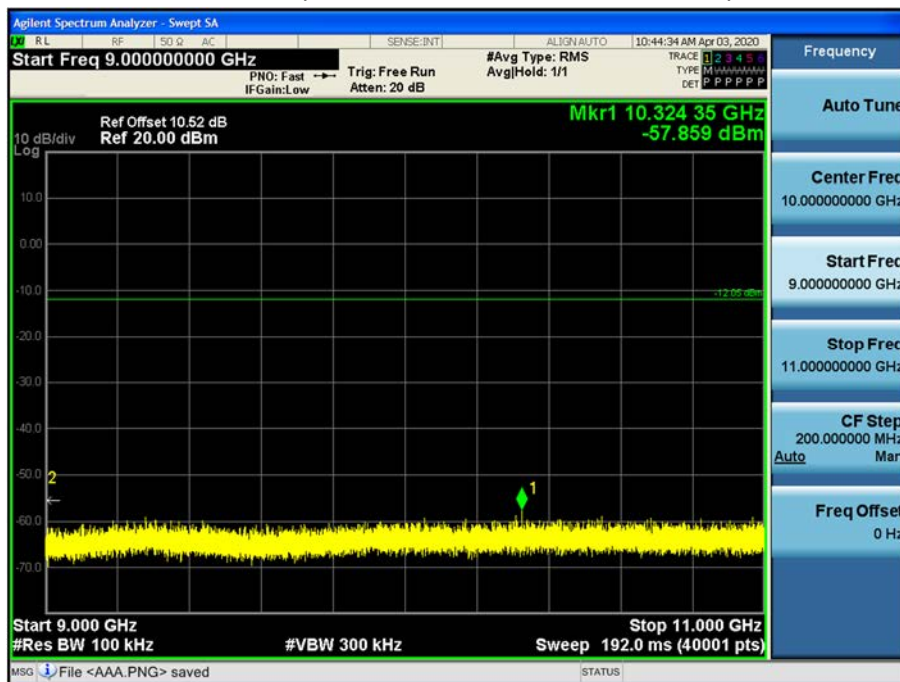


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

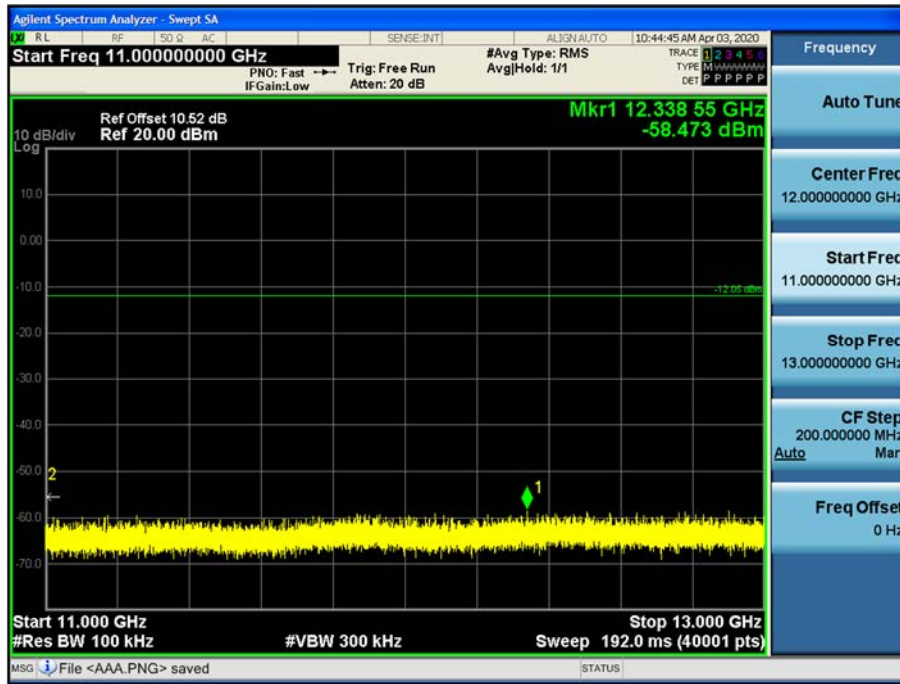


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

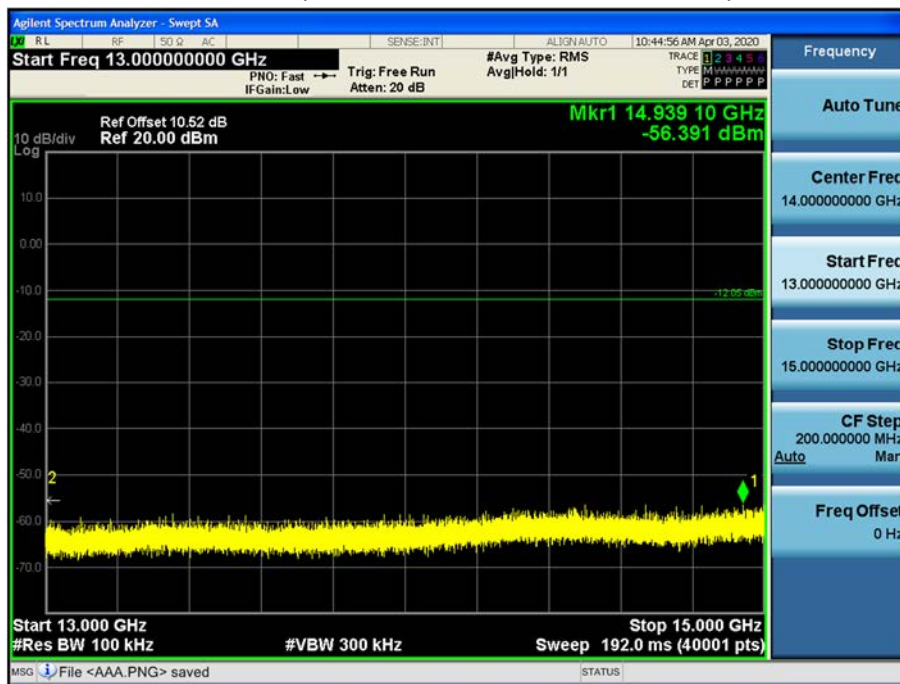


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

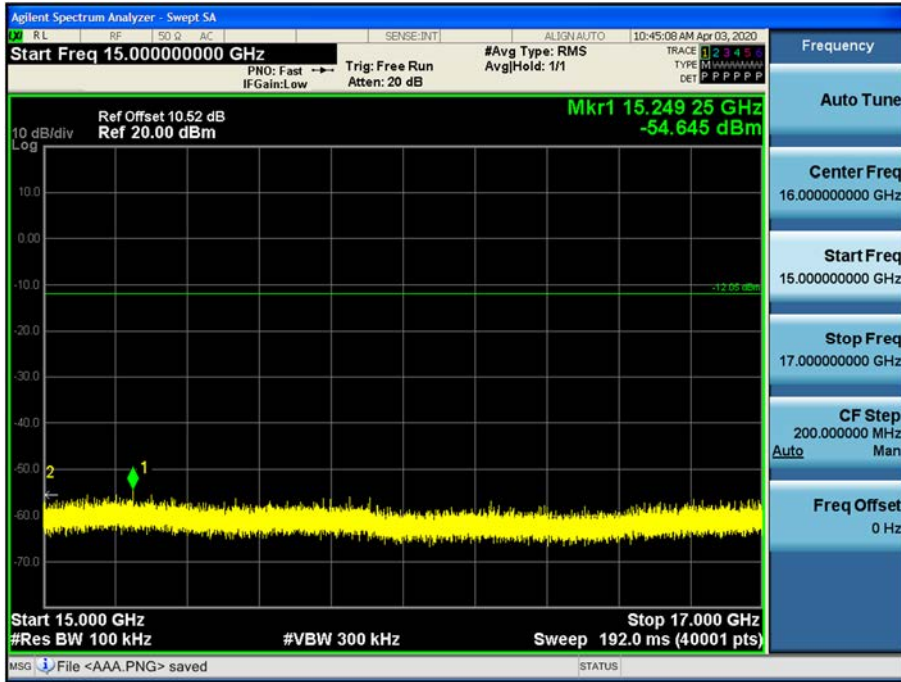


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

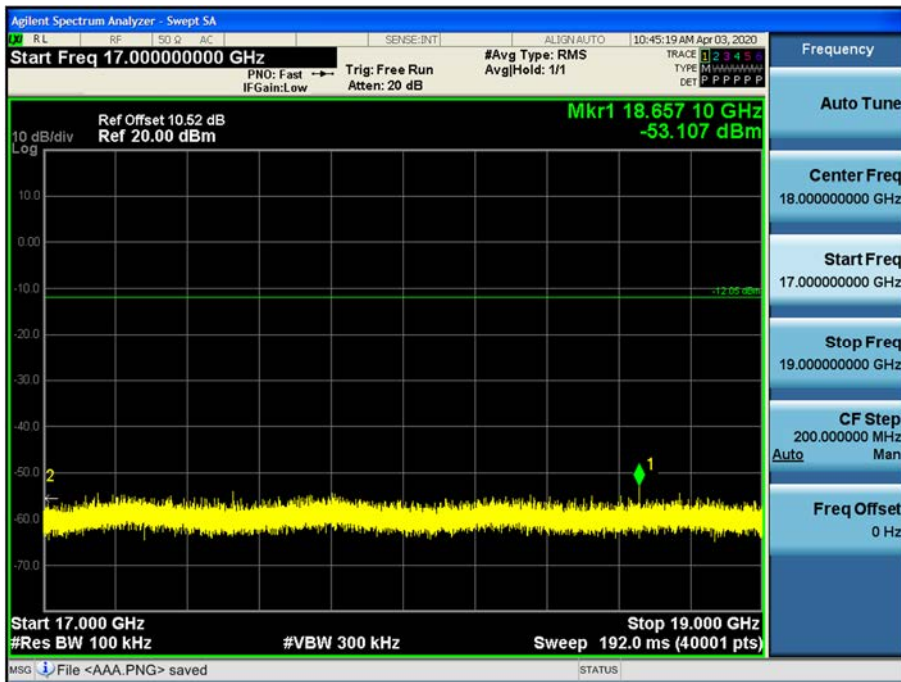


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

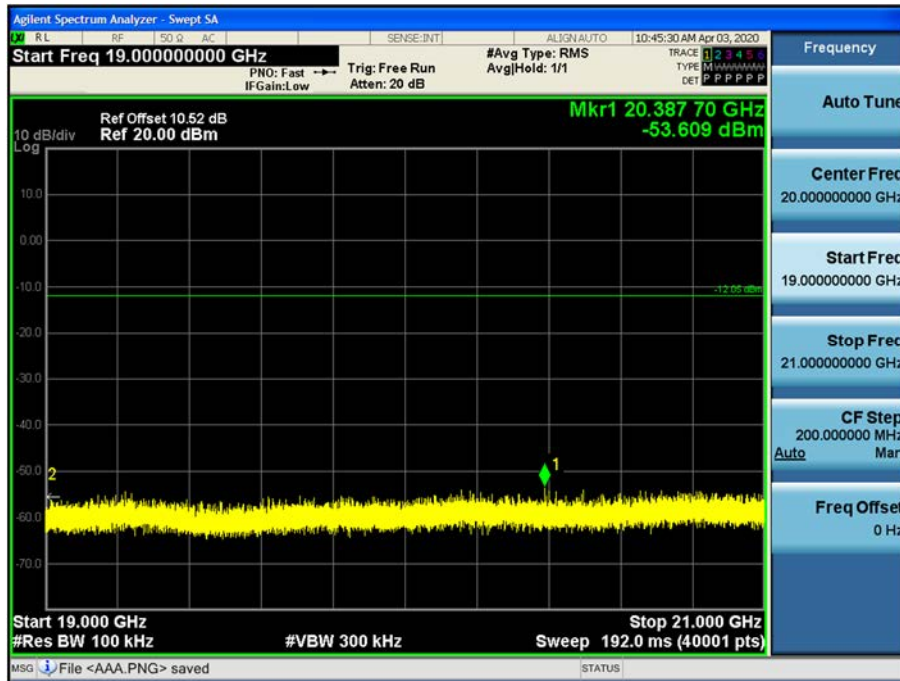


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

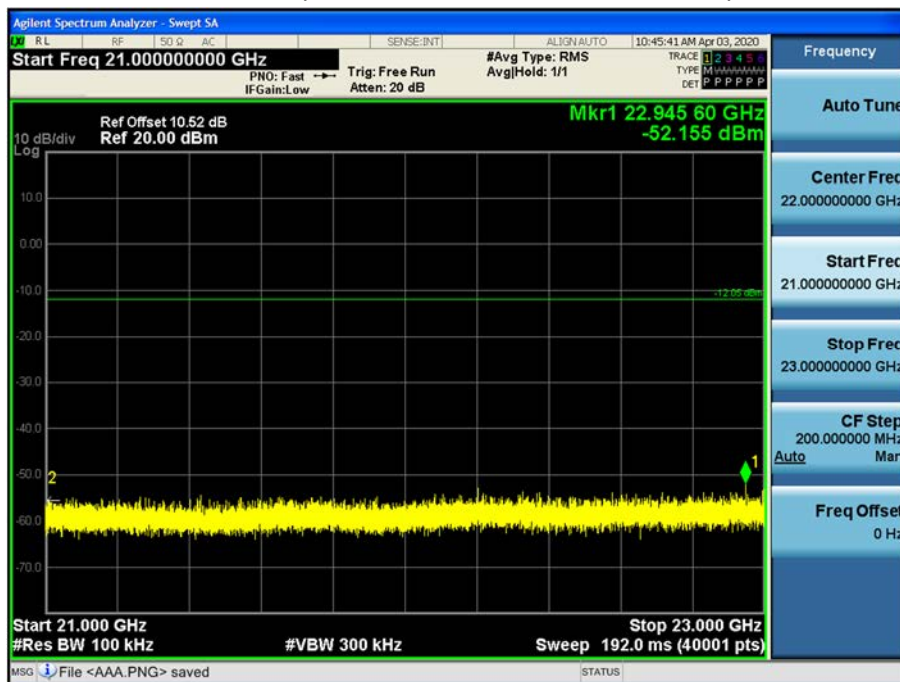

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b\_Ch.1\_2 Mbps)

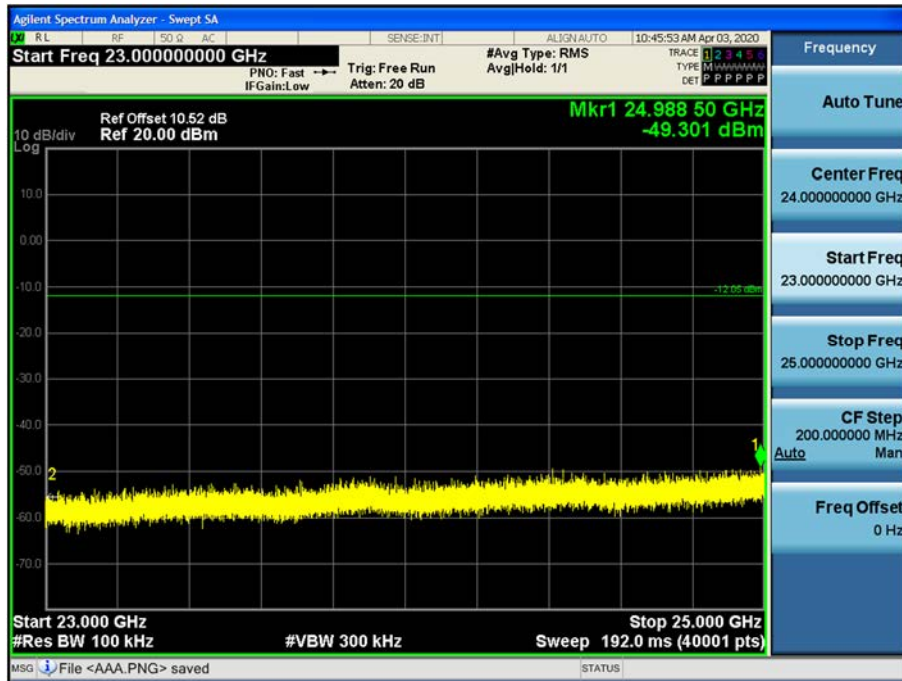

### 9.6 RADIATED SPURIOUS EMISSIONS

#### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

#### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.



**Frequency Range : Above 1 GHz**

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2412  
 Channel No. 01 Ch

Frequency [MHz]	Reading dBuV	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	52.74	4.31	V	57.05	73.98	16.93	PK
4824	43.95	4.31	V	48.26	53.98	5.72	AV
7236	41.62	12.35	V	53.97	73.98	20.01	PK
7236	30.24	12.35	V	42.59	53.98	11.39	AV
4824	52.45	4.31	H	56.76	73.98	17.22	PK
4824	43.46	4.31	H	47.77	53.98	6.21	AV
7236	40.76	12.35	H	53.11	73.98	20.87	PK
7236	30.12	12.35	H	42.47	53.98	11.51	AV

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2437  
 Channel No. 06 Ch

Frequency [MHz]	Reading dBuV	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	53.63	4.40	V	58.03	73.98	15.95	PK
4874	44.73	4.40	V	49.13	53.98	4.85	AV
7311	44.27	12.37	V	56.64	73.98	17.34	PK
7311	32.28	12.37	V	44.65	53.98	9.33	AV
4874	52.79	4.40	H	57.19	73.98	16.79	PK
4874	44.51	4.40	H	48.91	53.98	5.07	AV
7311	44.02	12.37	H	56.39	73.98	17.59	PK
7311	31.26	12.37	H	43.63	53.98	10.35	AV

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2462  
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	52.78	4.51	V	57.29	73.98	16.69	PK
4924	43.91	4.51	V	48.42	53.98	5.56	AV
7386	40.59	12.31	V	52.90	73.98	21.08	PK
7386	29.79	12.31	V	42.10	53.98	11.88	AV
4924	52.22	4.51	H	56.73	73.98	17.25	PK
4924	42.85	4.51	H	47.36	53.98	6.62	AV
7386	41.44	12.31	H	53.75	73.98	20.23	PK
7386	29.91	12.31	H	42.22	53.98	11.76	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2412  
 Channel No. 01 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	47.62	0.00	4.31	V	51.93	73.98	22.05	PK
4824	35.93	0.00	4.31	V	40.24	53.98	13.74	AV
7236	38.99	0.00	12.35	V	51.34	73.98	22.64	PK
7236	26.94	0.00	12.35	V	39.29	53.98	14.69	AV
4824	46.81	0.00	4.31	H	51.12	73.98	22.86	PK
4824	35.42	0.00	4.31	H	39.73	53.98	14.25	AV
7236	38.55	0.00	12.35	H	50.90	73.98	23.08	PK
7236	26.80	0.00	12.35	H	39.15	53.98	14.83	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2437  
 Channel No. 06 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	50.40	0.00	4.40	V	54.80	73.98	19.18	PK
4874	39.45	0.00	4.40	V	43.85	53.98	10.13	AV
7311	43.00	0.00	12.37	V	55.37	73.98	18.61	PK
7311	30.44	0.00	12.37	V	42.81	53.98	11.17	AV
4874	50.24	0.00	4.40	H	54.64	73.98	19.34	PK
4874	38.31	0.00	4.40	H	42.71	53.98	11.27	AV
7311	42.02	0.00	12.37	H	54.39	73.98	19.59	PK
7311	29.58	0.00	12.37	H	41.95	53.98	12.03	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2462  
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	48.23	0.00	4.51	V	52.74	73.98	21.24	PK
4924	36.33	0.00	4.51	V	40.84	53.98	13.14	AV
7386	38.25	0.00	12.31	V	50.56	73.98	23.42	PK
7386	26.41	0.00	12.31	V	38.72	53.98	15.26	AV
4924	47.60	0.00	4.51	H	52.11	73.98	21.87	PK
4924	35.29	0.00	4.51	H	39.80	53.98	14.18	AV
7386	37.49	0.00	12.31	H	49.80	73.98	24.18	PK
7386	26.37	0.00	12.31	H	38.68	53.98	15.30	AV

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412  
 Channel No.: 01 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	48.64	0.00	4.31	V	52.95	73.98	21.03	PK
4824	36.29	0.00	4.31	V	40.60	53.98	13.38	AV
7236	38.83	0.00	12.35	V	51.18	73.98	22.80	PK
7236	26.85	0.00	12.35	V	39.20	53.98	14.78	AV
4824	48.10	0.00	4.31	H	52.41	73.98	21.57	PK
4824	36.05	0.00	4.31	H	40.36	53.98	13.62	AV
7236	38.43	0.00	12.35	H	50.78	73.98	23.20	PK
7236	26.82	0.00	12.35	H	39.17	53.98	14.81	AV

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2437  
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	50.98	0.00	4.40	V	55.38	73.98	18.60	PK
4874	38.66	0.00	4.40	V	43.06	53.98	10.92	AV
7311	43.35	0.00	12.37	V	55.72	73.98	18.26	PK
7311	30.02	0.00	12.37	V	42.39	53.98	11.59	AV
4874	50.62	0.00	4.40	H	55.02	73.98	18.96	PK
4874	37.53	0.00	4.40	H	41.93	53.98	12.05	AV
7311	42.42	0.00	12.37	H	54.79	73.98	19.19	PK
7311	29.32	0.00	12.37	H	41.69	53.98	12.29	AV

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2462  
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	48.75	0.00	4.51	V	53.26	73.98	20.72	PK
4924	36.58	0.00	4.51	V	41.09	53.98	12.89	AV
7386	39.01	0.00	12.31	V	51.32	73.98	22.66	PK
7386	26.69	0.00	12.31	V	39.00	53.98	14.98	AV
4924	48.17	0.00	4.51	H	52.68	73.98	21.30	PK
4924	36.05	0.00	4.51	H	40.56	53.98	13.42	AV
7386	38.51	0.00	12.31	H	50.82	73.98	23.16	PK
7386	26.61	0.00	12.31	H	38.92	53.98	15.06	AV

Operation Mode: 802.11n (HT40)  
 Operating Frequency: 2422  
 Channel No.: 03 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4844	46.70	0.00	4.32	V	51.02	73.98	22.96	PK
4844	34.72	0.00	4.32	V	39.04	53.98	14.94	AV
7266	40.12	0.00	12.52	V	52.64	73.98	21.34	PK
7266	27.06	0.00	12.52	V	39.58	53.98	14.40	AV
4844	45.42	0.00	4.32	H	49.74	73.98	24.24	PK
4844	34.69	0.00	4.32	H	39.01	53.98	14.97	AV
7266	38.65	0.00	12.52	H	51.17	73.98	22.81	PK
7266	26.90	0.00	12.52	H	39.42	53.98	14.56	AV

Operation Mode: 802.11n (HT40)  
 Operating Frequency: 2437  
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	46.69	0.00	4.40	V	51.09	73.98	22.89	PK
4874	35.59	0.00	4.40	V	39.99	53.98	13.99	AV
7311	38.15	0.00	12.37	V	50.52	73.98	23.46	PK
7311	27.02	0.00	12.37	V	39.39	53.98	14.59	AV
4874	46.74	0.00	4.40	H	51.14	73.98	22.84	PK
4874	35.39	0.00	4.40	H	39.79	53.98	14.19	AV
7311	38.82	0.00	12.37	H	51.19	73.98	22.79	PK
7311	27.10	0.00	12.37	H	39.47	53.98	14.51	AV


Operation Mode: 802.11n (HT40)  
 Operating Frequency: 2452  
 Channel No.: 9 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F+C.L-AMP+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4904	46.22	0.00	4.49	V	50.71	73.98	23.27	PK
4904	33.78	0.00	4.49	V	38.27	53.98	15.71	AV
7356	38.42	0.00	12.26	V	50.68	73.98	23.30	PK
7356	26.52	0.00	12.26	V	38.78	53.98	15.20	AV
4904	44.99	0.00	4.49	H	49.48	73.98	24.50	PK
4904	32.72	0.00	4.49	H	37.21	53.98	16.77	AV
7356	37.61	0.00	12.26	H	49.87	73.98	24.11	PK
7356	26.42	0.00	12.26	H	38.68	53.98	15.30	AV




▣ Test Plots (Worst case : Y-V)

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.6 2nd Harmonic)

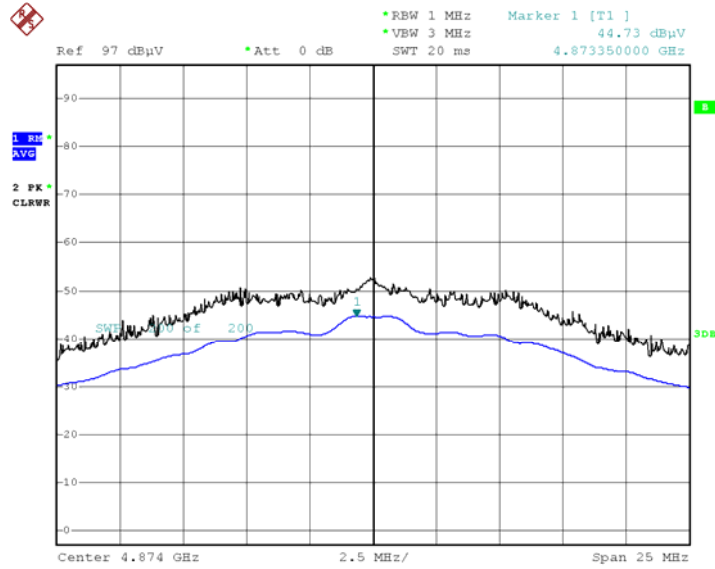


Date: 26.MAR.2020 10:48:17

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.6 2nd Harmonic)

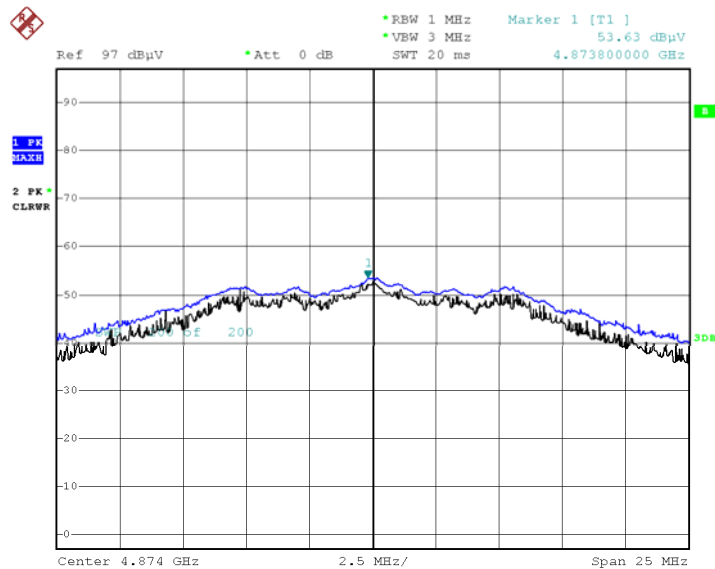


Date: 26.MAR.2020 10:48:42

Radiated Spurious Emissions plot – Average Reading (802.11n (HT40), Ch.6 2nd Harmonic)

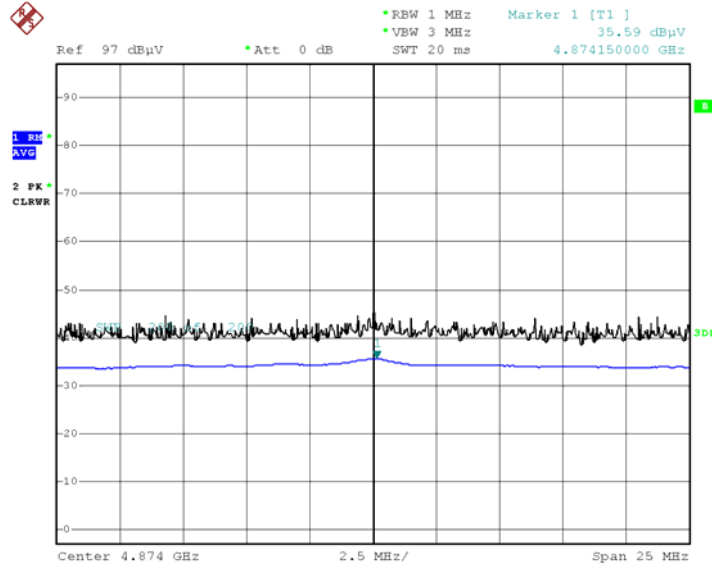

Date: 26.MAR.2020 10:11:09

Radiated Spurious Emissions plot – Peak Reading (802.11n (HT40), Ch.6 2nd Harmonic)

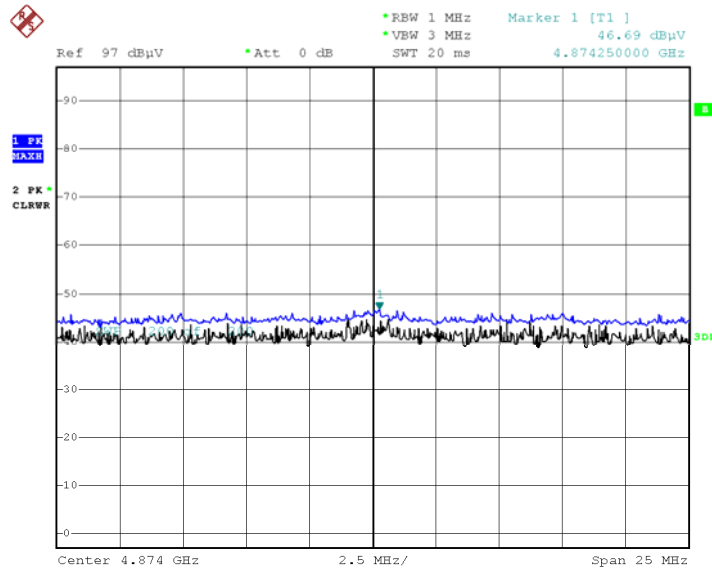

Date: 26.MAR.2020 10:11:54

**Note:**

Plot of worst case are only reported.

### 9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	27.11	34.31	H	61.42	73.98	12.56	PK
2390.0	16.25	34.31	H	50.56	53.98	3.42	AV
2390.0	27.05	34.31	V	61.36	73.98	12.62	PK
2390.0	16.12	34.31	V	50.43	53.98	3.55	AV
2483.5	26.49	34.14	H	60.63	73.98	13.35	PK
2483.5	15.95	34.14	H	50.09	53.98	3.89	AV
2483.5	25.81	34.14	V	59.95	73.98	14.03	PK
2483.5	15.45	34.14	V	49.59	53.98	4.39	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	27.18	0.00	34.31	H	61.49	73.98	12.49	PK
2390.0	16.51	0.00	34.31	H	50.82	53.98	3.16	AV
2390.0	26.14	0.00	34.31	V	60.45	73.98	13.53	PK
2390.0	15.37	0.00	34.31	V	49.68	53.98	4.30	AV
2483.5	27.82	0.00	34.14	H	61.96	73.98	12.02	PK
2483.5	15.58	0.00	34.14	H	49.72	53.98	4.26	AV
2483.5	27.55	0.00	34.14	V	61.69	73.98	12.29	PK
2483.5	15.42	0.00	34.14	V	49.56	53.98	4.42	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2417 MHz, 2457 MHz  
 Channel No.: 02 Ch, 10 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	27.61	0.00	34.31	H	61.92	73.98	12.06	PK
2390.0	16.39	0.00	34.31	H	50.70	53.98	3.28	AV
2390.0	27.13	0.00	34.31	V	61.44	73.98	12.54	PK
2390.0	15.22	0.00	34.31	V	49.53	53.98	4.45	AV
2483.5	27.90	0.00	34.14	H	62.04	73.98	11.94	PK
2483.5	16.24	0.00	34.14	H	50.38	53.98	3.60	AV
2483.5	27.45	0.00	34.14	V	61.59	73.98	12.39	PK
2483.5	16.02	0.00	34.14	V	50.16	53.98	3.82	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2422 MHz, 2452 MHz  
 Channel No.: 03 Ch, 09 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	28.54	0.00	34.31	H	62.85	73.98	11.13	PK
2390.0	15.89	0.00	34.31	H	50.20	53.98	3.78	AV
2390.0	26.72	0.00	34.31	V	61.03	73.98	12.95	PK
2390.0	15.28	0.00	34.31	V	49.59	53.98	4.39	AV
2483.5	27.73	0.00	34.14	H	61.87	73.98	12.11	PK
2483.5	15.82	0.00	34.14	H	49.96	53.98	4.02	AV
2483.5	27.29	0.00	34.14	V	61.43	73.98	12.55	PK
2483.5	15.43	0.00	34.14	V	49.57	53.98	4.41	AV

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	27.57	0.00	34.31	H	61.88	73.98	12.10	PK
2390.0	16.39	0.00	34.31	H	50.70	53.98	3.28	AV
2390.0	27.11	0.00	34.31	V	61.42	73.98	12.56	PK
2390.0	16.02	0.00	34.31	V	50.33	53.98	3.65	AV
2483.5	28.60	0.00	34.14	H	62.74	73.98	11.24	PK
2483.5	16.62	0.00	34.14	H	50.76	53.98	3.22	AV
2483.5	27.89	0.00	34.14	V	62.03	73.98	11.95	PK
2483.5	16.12	0.00	34.14	V	50.26	53.98	3.72	AV

Operation Mode: 802.11n (HT20)  
 Transfer Rate: 0  
 Operating Frequency: 2417 MHz, 2457 MHz  
 Channel No.: 02 Ch, 10 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	28.06	0.00	34.31	H	62.37	73.98	11.61	PK
2390.0	16.27	0.00	34.31	H	50.58	53.98	3.40	AV
2390.0	27.84	0.00	34.31	V	62.15	73.98	11.83	PK
2390.0	16.11	0.00	34.31	V	50.42	53.98	3.56	AV
2483.5	27.97	0.00	34.14	H	62.11	73.98	11.87	PK
2483.5	16.38	0.00	34.14	H	50.52	53.98	3.46	AV
2483.5	27.64	0.00	34.14	V	61.78	73.98	12.20	PK
2483.5	16.05	0.00	34.14	V	50.19	53.98	3.79	AV

Operation Mode: 802.11n (HT20)  
 Transfer Rate: 0  
 Operating Frequency: 2422 MHz, 2452 MHz  
 Channel No.: 03 Ch, 09 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	27.41	0.00	34.31	H	61.72	73.98	12.26	PK
2390.0	15.83	0.00	34.31	H	50.14	53.98	3.84	AV
2390.0	26.33	0.00	34.31	V	60.64	73.98	13.34	PK
2390.0	15.77	0.00	34.31	V	50.08	53.98	3.90	AV
2483.5	27.46	0.00	34.14	H	61.60	73.98	12.38	PK
2483.5	15.61	0.00	34.14	H	49.75	53.98	4.23	AV
2483.5	26.19	0.00	34.14	V	60.33	73.98	13.65	PK
2483.5	15.33	0.00	34.14	V	49.47	53.98	4.51	AV

Operation Mode: 802.11n (HT40)  
 Operating Frequency: 2422 MHz, 2452 MHz  
 Channel No.: 03 Ch, 09 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	28.03	0.00	34.31	H	62.34	73.98	11.64	PK
2390.0	16.89	0.00	34.31	H	51.20	53.98	2.78	AV
2390.0	27.16	0.00	34.31	V	61.47	73.98	12.51	PK
2390.0	16.11	0.00	34.31	V	50.42	53.98	3.56	AV
2483.5	27.82	0.00	34.14	H	61.96	73.98	12.02	PK
2483.5	16.52	0.00	34.14	H	50.66	53.98	3.32	AV
2483.5	26.81	0.00	34.14	V	60.95	73.98	13.03	PK
2483.5	16.02	0.00	34.14	V	50.16	53.98	3.82	AV

Operation Mode: 802.11n (HT40)  
 Operating Frequency: 2427 MHz, 2447 MHz  
 Channel No.: 04 Ch, 08 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	27.58	0.00	34.31	H	61.89	73.98	12.09	PK
2390.0	16.33	0.00	34.31	H	50.64	53.98	3.34	AV
2390.0	27.18	0.00	34.31	V	61.49	73.98	12.49	PK
2390.0	16.12	0.00	34.31	V	50.43	53.98	3.55	AV
2483.5	27.37	0.00	34.14	H	61.51	73.98	12.47	PK
2483.5	16.47	0.00	34.14	H	50.61	53.98	3.37	AV
2483.5	27.22	0.00	34.14	V	61.36	73.98	12.62	PK
2483.5	16.05	0.00	34.14	V	50.19	53.98	3.79	AV

Operation Mode: 802.11n (HT40)  
 Operating Frequency: 2432 MHz, 2442 MHz  
 Channel No.: 05 Ch, 07 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	28.20	0.00	34.31	H	62.51	73.98	11.47	PK
2390.0	16.47	0.00	34.31	H	50.78	53.98	3.20	AV
2390.0	27.91	0.00	34.31	V	62.22	73.98	11.76	PK
2390.0	16.34	0.00	34.31	V	50.65	53.98	3.33	AV
2483.5	27.71	0.00	34.14	H	61.85	73.98	12.13	PK
2483.5	16.33	0.00	34.14	H	50.47	53.98	3.51	AV
2483.5	27.16	0.00	34.14	V	61.30	73.98	12.68	PK
2483.5	16.22	0.00	34.14	V	50.36	53.98	3.62	AV


Operation Mode: 802.11n (HT40)  
 Operating Frequency: 2437 MHz  
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	※ A.F+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	27.82	0.00	34.31	H	62.13	73.98	11.85	PK
2390.0	16.49	0.00	34.31	H	50.80	53.98	3.18	AV
2390.0	26.37	0.00	34.31	V	60.68	73.98	13.30	PK
2390.0	16.05	0.00	34.31	V	50.36	53.98	3.62	AV
2483.5	26.79	0.00	34.14	H	60.93	73.98	13.05	PK
2483.5	16.31	0.00	34.14	H	50.45	53.98	3.53	AV
2483.5	26.65	0.00	34.14	V	60.79	73.98	13.19	PK
2483.5	16.01	0.00	34.14	V	50.15	53.98	3.83	AV




### Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.1)

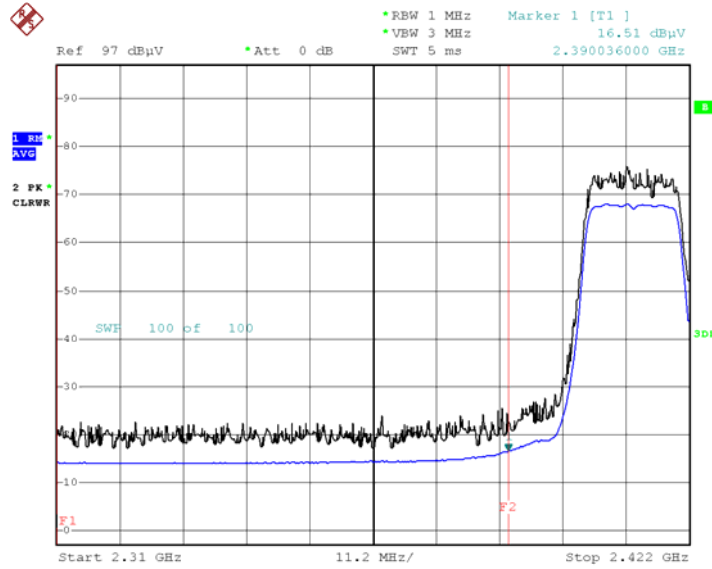


Date: 25.MAR.2020 17:18:32

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.1)

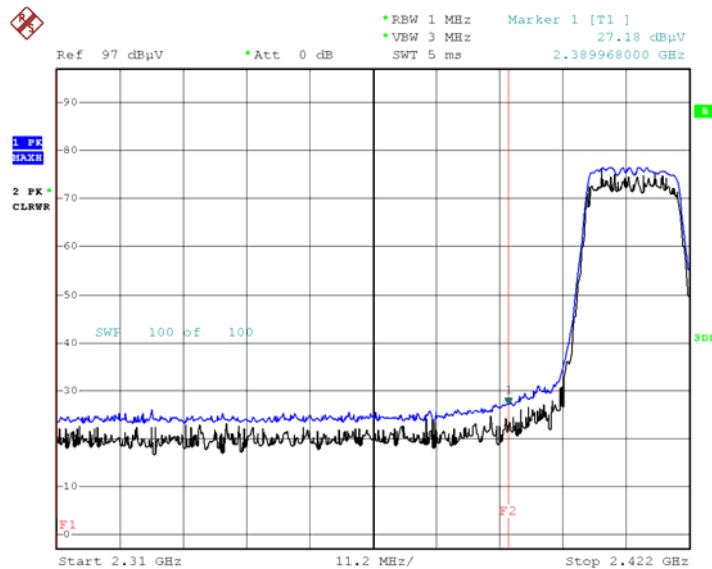


Date: 25.MAR.2020 17:19:06

Radiated Restricted Band Edges plot – Average Reading (802.11n (HT40) Ch.3)

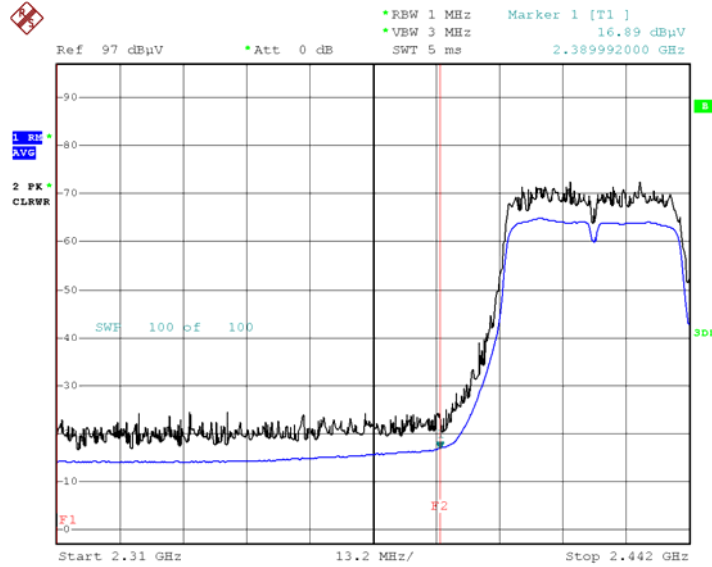

Date: 26.MAR.2020 09:15:23

Radiated Restricted Band Edges plot – Peak Reading (802.11n (HT40) Ch.3)

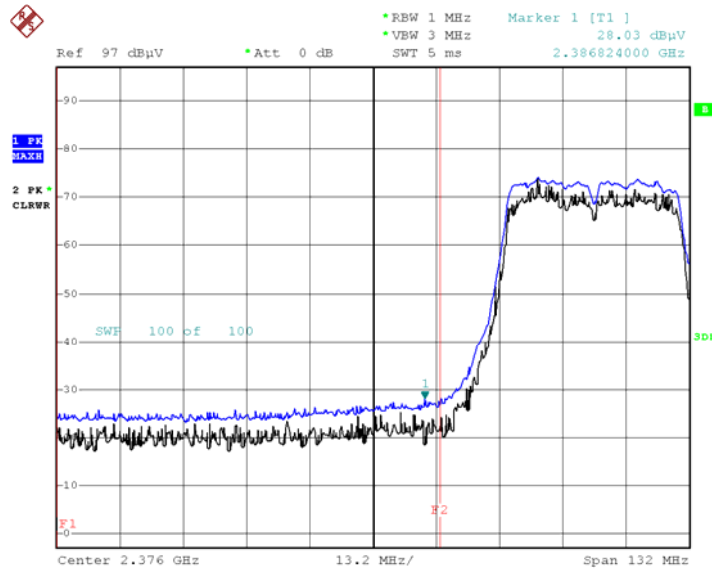

Date: 26.MAR.2020 09:16:35

**Note:**

Plot of worst case are only reported.

## 9.8 RECEIVER SPURIOUS EMISSIONS

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

### 9.9 POWERLINE CONDUCTED EMISSIONS

#### Conducted Emissions (Line 1)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: ETWFAEWC01  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN 2.4G\_N

FCC CLASS B

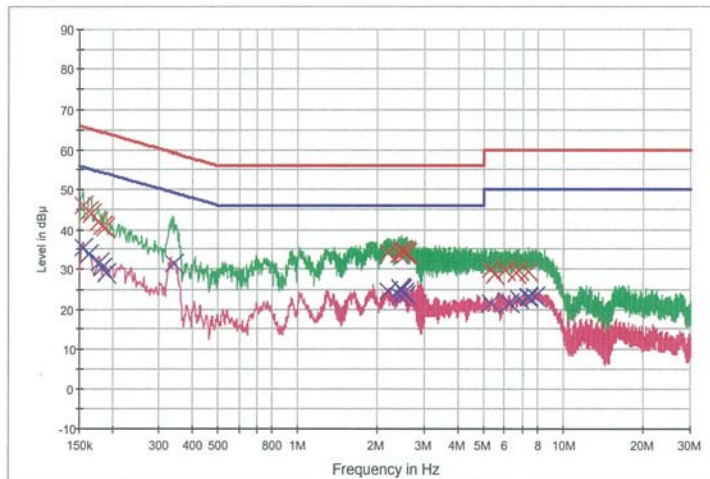

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
x Preview Result 2-AVG      x Final Result 1-QPK      x Final Result 2-CAV

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.156000	45.8	9.000	On	N	9.7	19.8	65.7
0.162000	44.6	9.000	On	N	9.7	20.7	65.4
0.166000	43.7	9.000	On	N	9.7	21.4	65.2
0.176000	41.9	9.000	On	N	9.7	22.8	64.7
0.184000	40.7	9.000	On	N	9.7	23.6	64.3
0.188000	40.7	9.000	On	N	9.7	23.5	64.1
2.186000	34.1	9.000	On	N	9.8	21.9	56.0
2.392000	33.6	9.000	On	N	9.8	22.4	56.0
2.452000	34.8	9.000	On	N	9.8	21.2	56.0
2.522000	34.5	9.000	On	N	9.8	21.5	56.0
2.544000	33.8	9.000	On	N	9.8	22.2	56.0
2.560000	34.1	9.000	On	N	9.8	21.9	56.0
5.332000	29.8	9.000	On	N	9.8	30.2	60.0
5.492000	28.8	9.000	On	N	9.8	31.2	60.0
6.062000	29.5	9.000	On	N	9.9	30.5	60.0
6.642000	29.0	9.000	On	N	9.9	31.0	60.0
6.804000	29.8	9.000	On	N	9.9	30.2	60.0
7.390000	29.3	9.000	On	N	9.9	30.7	60.0

2020-04-08

오후 1:30:25

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.156000	35.6	9.000	On	N	9.7	20.1	55.7
0.162000	33.8	9.000	On	N	9.7	21.6	55.4
0.178000	31.6	9.000	On	N	9.7	23.0	54.6
0.184000	30.3	9.000	On	N	9.7	24.0	54.3
0.190000	29.1	9.000	On	N	9.7	24.9	54.0
0.340000	31.4	9.000	On	N	9.7	17.8	49.2
2.186000	24.6	9.000	On	N	9.8	21.4	46.0
2.416000	23.2	9.000	On	N	9.8	22.8	46.0
2.430000	25.2	9.000	On	N	9.8	20.8	46.0
2.452000	25.0	9.000	On	N	9.8	21.0	46.0
2.522000	24.1	9.000	On	N	9.8	21.9	46.0
2.544000	23.7	9.000	On	N	9.8	22.3	46.0
5.310000	21.5	9.000	On	N	9.8	28.5	50.0
6.224000	21.5	9.000	On	N	9.9	28.5	50.0
6.804000	22.5	9.000	On	N	9.9	27.5	50.0
7.366000	22.9	9.000	On	N	9.9	27.1	50.0
7.390000	23.2	9.000	On	N	9.9	26.8	50.0
7.778000	23.2	9.000	On	N	9.9	26.8	50.0

2020-04-08

오후 1:30:25

Conducted Emissions (Line 2)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: ETWFAEWC01  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN 2.4G\_L1

FCC CLASS B

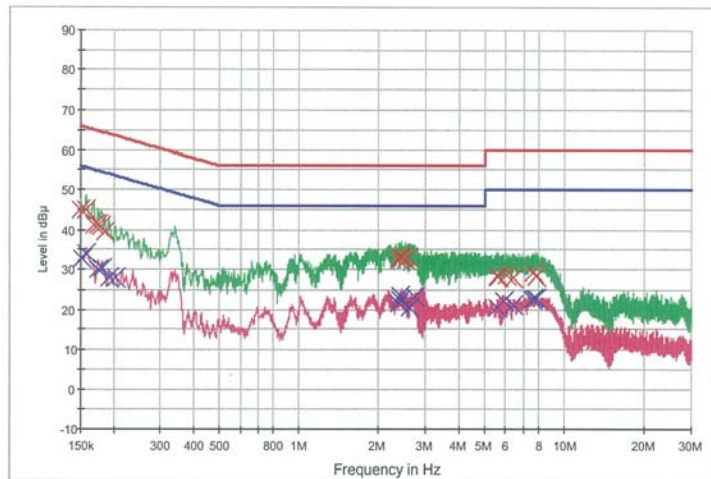

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	44.9	9.000	On	L1	9.7	21.1	66.0
0.158000	44.8	9.000	On	L1	9.7	20.8	65.6
0.168000	41.2	9.000	On	L1	9.7	23.9	65.1
0.174000	41.1	9.000	On	L1	9.7	23.7	64.8
0.178000	40.7	9.000	On	L1	9.7	23.8	64.6
0.186000	39.4	9.000	On	L1	9.7	24.8	64.2
2.372000	32.3	9.000	On	L1	9.8	23.7	56.0
2.406000	33.0	9.000	On	L1	9.8	23.0	56.0
2.410000	33.4	9.000	On	L1	9.8	22.6	56.0
2.434000	33.1	9.000	On	L1	9.8	22.9	56.0
2.516000	32.4	9.000	On	L1	9.8	23.6	56.0
2.562000	33.0	9.000	On	L1	9.8	23.0	56.0
5.556000	28.4	9.000	On	L1	9.9	31.6	60.0
5.610000	28.4	9.000	On	L1	9.9	31.6	60.0
6.040000	28.5	9.000	On	L1	9.9	31.5	60.0
6.442000	28.1	9.000	On	L1	9.9	31.9	60.0
7.634000	29.4	9.000	On	L1	9.9	30.6	60.0
7.792000	28.4	9.000	On	L1	9.9	31.6	60.0

2020-04-08

오후 1:18:17

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	32.9	9.000	On	L1	9.7	23.0	55.9
0.158000	34.0	9.000	On	L1	9.7	21.5	55.6
0.174000	29.9	9.000	On	L1	9.7	24.9	54.8
0.180000	30.4	9.000	On	L1	9.7	24.0	54.5
0.192000	28.0	9.000	On	L1	9.7	25.9	53.9
0.204000	28.0	9.000	On	L1	9.7	25.5	53.4
2.372000	21.5	9.000	On	L1	9.8	24.5	46.0
2.390000	22.4	9.000	On	L1	9.8	23.6	46.0
2.406000	22.6	9.000	On	L1	9.8	23.4	46.0
2.410000	23.6	9.000	On	L1	9.8	22.4	46.0
2.596000	20.5	9.000	On	L1	9.8	25.5	46.0
2.726000	23.3	9.000	On	L1	9.8	22.7	46.0
5.556000	20.6	9.000	On	L1	9.9	29.4	50.0
5.902000	22.4	9.000	On	L1	9.9	27.6	50.0
6.442000	21.0	9.000	On	L1	9.9	29.0	50.0
7.588000	22.6	9.000	On	L1	9.9	27.4	50.0
7.634000	22.9	9.000	On	L1	9.9	27.1	50.0
7.792000	22.9	9.000	On	L1	9.9	27.1	50.0

2020-04-08

오후 1:18:17

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100584
ESPAC	SU-642 /Temperature Chamber	08/14/2019	Annual	0093000718
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	03/23/2020	Annual	MY49432108
Agilent	N1911A / Power Meter	09/10/2019	Annual	MY45101406
Agilent	N1921A / Power Sensor	09/06/2019	Annual	MY55220026
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	18N-20dB / Attenuator(20 dB)	03/23/2020	Annual	8
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2019	Annual	100422

#### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.



**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	01/18/2019	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/29/2019	Biennial	BBHA9170342
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/16/2019	Annual	100843
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/21/2020	Annual	F6
TNM system	FBSM-05B / ATT(10dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / ATT(3dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / LNA1(1~18GHz)	01/21/2020	Annual	25540
TNM system	FBSM-05B / HPF(7~18GHz) + LNA2(6~18GHz)	01/21/2020	Annual	28550
TNM system	FBSM-05B / Thru(30MHz ~ 18GHz)	01/21/2020	Annual	None

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2004-FI001-P

**Note:**

1. The antenna mounted on the module was too small, so it was fixed on the Styrofoam and tested.