


# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

**Test Report No.** : W159R-D010  
**AGR No.** : A158A-145  
**Applicant** : LG Innotek Co., Ltd.  
**Address** : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731 Korea  
**Manufacturer** : LG Innotek Co., Ltd.  
**Address** : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731 Korea  
**Type of Equipment** : Bluetooth/WLAN Combo Module for Automotive  
**FCC ID.** : YZP-RBHAC213B  
**Model Name** : RBHA-C213B  
**Serial number** : N/A  
**Total page of Report** : 83 pages (including this page)  
**Date of Incoming** : August 27, 2015  
**Date of issue** : September 09, 2015

## SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*  
 This test report only contains the result of a single test of the sample supplied for the examination.  
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:   
 \_\_\_\_\_  
 Ki-Hong, Nam / Asst, Chief Engineer  
 ONETECH Corp.

Approved by:   
 \_\_\_\_\_  
 Sung-Ik, Han / Managing Director  
 ONETECH Corp.

## CONTENTS

	<b>PAGE</b>
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>6</b>
<b>2. TEST SUMMARY .....</b>	<b>7</b>
<b>2.1 TEST ITEMS AND RESULTS .....</b>	<b>7</b>
<b>2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS .....</b>	<b>7</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>7</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>7</b>
<b>2.5 TEST METHODOLOGY .....</b>	<b>7</b>
<b>2.6 TEST FACILITY .....</b>	<b>7</b>
<b>3. GENERAL INFORMATION .....</b>	<b>8</b>
<b>3.1 PRODUCT DESCRIPTION .....</b>	<b>8</b>
<b>3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT .....</b>	<b>8</b>
<b>4. EUT MODIFICATIONS .....</b>	<b>8</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
<b>5.1 JUSTIFICATION .....</b>	<b>9</b>
<b>5.2 PERIPHERAL EQUIPMENT .....</b>	<b>9</b>
<b>5.3 CONFIGURATION OF TEST SYSTEM .....</b>	<b>9</b>
<b>5.4 ANTENNA REQUIREMENT .....</b>	<b>9</b>
<b>6. PRELIMINARY TEST .....</b>	<b>10</b>
<b>6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS .....</b>	<b>10</b>
<b>6.2 GENERAL RADIATED EMISSIONS TESTS .....</b>	<b>10</b>
<b>7. MINIMUM 20 DB BANDWIDTH .....</b>	<b>11</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>11</b>
<b>7.2 TEST SET-UP .....</b>	<b>11</b>
<b>7.3 TEST EQUIPMENT USED .....</b>	<b>11</b>
<b>7.4 TEST DATA FOR 1 MBPS .....</b>	<b>12</b>
<b>7.5 TEST DATA FOR 2 MBPS .....</b>	<b>14</b>
<b>7.6 TEST DATA FOR 3 MBPS .....</b>	<b>16</b>
<b>8. HOPPING FREQUENCY SEPARATION .....</b>	<b>18</b>
<b>8.1 OPERATING ENVIRONMENT .....</b>	<b>18</b>
<b>8.2 TEST SET-UP .....</b>	<b>18</b>

8.3 TEST EQUIPMENT USED .....	18
8.4 TEST DATA FOR 1 MBPS .....	19
8.5 TEST DATA FOR 2 MBPS .....	20
8.6 TEST DATA FOR 3 MBPS .....	21
<b>9. NUMBER OF HOPPING CHANNELS .....</b>	<b>22</b>
9.1 OPERATING ENVIRONMENT .....	22
9.2 TEST SET-UP .....	22
9.3 TEST EQUIPMENT USED .....	22
9.4 TEST DATA FOR 1 MBPS .....	23
9.5 TEST DATA FOR 2 MBPS .....	26
9.6 TEST DATA FOR 3 MBPS .....	29
<b>10. TIME OF OCCUPANCY .....</b>	<b>32</b>
10.1 OPERATING ENVIRONMENT .....	32
10.2 TEST SET-UP .....	32
10.3 TEST EQUIPMENT USED .....	32
10.4 TEST DATA FOR 1 MBPS .....	33
10.5 TEST DATA FOR 2 MBPS .....	36
10.6 TEST DATA FOR 3 MBPS .....	39
<b>11. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>42</b>
11.1 OPERATING ENVIRONMENT .....	42
11.2 TEST SET-UP .....	42
11.3 TEST EQUIPMENT USED .....	42
11.4 TEST DATA FOR 1 MBPS .....	43
11.5 TEST DATA FOR 2 MBPS .....	45
11.6 TEST DATA FOR 3 MBPS .....	47
<b>12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND .....</b>	<b>49</b>
12.1 OPERATING ENVIRONMENT .....	49
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT .....	49
12.3 TEST SET-UP FOR RADIATED MEASUREMENT .....	49
12.4 TEST EQUIPMENT USED .....	49
12.5 TEST DATA FOR CONDUCTED EMISSION .....	50
12.5.1 Test data for 1 Mbps .....	50
12.5.2 Test data for 2 Mbps .....	56
12.5.3 Test data for 3 Mbps .....	62
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION .....	68

12.6.1 Radiated Emission which fall in the Restricted Band.....	68
12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz.....	71
<b>13. RADIATED EMISSION TEST .....</b>	<b>74</b>
13.1 OPERATING ENVIRONMENT .....	74
13.2 TEST SET-UP .....	74
13.3 TEST EQUIPMENT USED.....	74
13.4 TEST DATA FOR 1 MBPS .....	75
13.4.1 Test data for 30 MHz ~ 1 000 MHz.....	75
13.4.2 Test data for Below 30 MHz.....	76
13.4.3 Test data for above 1 GHz .....	76
13.5 TEST DATA FOR 2 MBPS .....	77
13.5.1 Test data for 30 MHz ~ 1 000 MHz.....	77
13.5.2 Test data for Below 30 MHz.....	78
13.5.3 Test data for above 1 GHz .....	78
13.6 TEST DATA FOR 3 MBPS .....	79
13.6.1 Test data for 30 MHz ~ 1 000 MHz.....	79
13.6.2 Test data for Below 30 MHz.....	80
13.6.3 Test data for above 1 GHz .....	80
<b>14. CONDUCTED EMISSION TEST .....</b>	<b>81</b>
14.1 OPERATING ENVIRONMENT .....	81
14.2 TEST SET-UP .....	81
14.3 TEST EQUIPMENT USED.....	81
14.4 TEST DATA.....	82

### Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
W159R-D010	September 09, 2015	Initial Issue	All

## 1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.  
 Address : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731 Korea  
 Contact Person : Inchang, Jeong / Director  
 Telephone No. : +82-62-950-0332  
 FCC ID : YZP-RBHAC213B  
 Model Name : RBHA-C213B  
 Serial Number : N/A  
 Date : September 09, 2015

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Modular Transmitter, Bluetooth/WLAN Combo Module for Automotive
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (b) (5)	Radio Frequency Exposure Level	Met requirement / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

### 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 301-14, Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862 Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-666/ T-1842 IC (Industry Canada) – Registration No. Site# 3736-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation No. 85

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

**HEAD OFFICE** : 301-14 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

**EMC Testing Div.** : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea (TEL: 82-31-765-8289, FAX: 82-31-766-2904)

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The LG Innotek Co., Ltd., Model RBHA-C213B (referred to as the EUT in this report) is a Bluetooth/WLAN Combo Module for Automotive. Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Bluetooth/WLAN Combo Module for Automotive		
OPERATING FREQUENCY	WLAN	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))	
	Bluetooth	2 402 MHz ~ 2 480 MHz	
	Bluetooth LE	2 402 MHz ~ 2 480 MHz	
MAX. RF OUTPUT POWER	WLAN	Wi-Fi 802.11b (11.25 dBm)	
		Wi-Fi 802.11g (10.31 dBm)	
		Wi-Fi 802.11n_20 MHz (10.20 dBm)	
	Bluetooth	1 Mbps	6.70 dBm
		2 Mbps	5.15 dBm
		3 Mbps	5.43 dBm
	Bluetooth LE	2.63 dBm	
MODULATION TYPE	WLAN	DSSS Modulation(DBPSK/DQPSK/CCK)	
	Bluetooth	GFSK for 1 Mbps, DQPSK for 2 Mbps, 8-DPSK for 3 Mbps	
	Bluetooth LE	GFSK	
ANTENNA TYPE	Dipole Antenna		
ANTENNA GAIN	2.41 dBi		
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	26 MHz		

#### 3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

### 4. EUT MODIFICATIONS

-. None



## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Innotek Co., Ltd.	RBHA-C211A Carrier B'D Rev 0.2	N/A

### 5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
RBHA-C213B	LG Innotek Co., Ltd.	Bluetooth/WLAN Combo Module for Automotive (EUT)	Notebook PC
PP11L	DELL	Notebook PC	EUT

### 5.3 Configuration of Test System

**Line Conducted Test:** The jig board of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.  
The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

### 5.4 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### Antenna Construction:

The antenna of the EUT shall be used inverse spiral interface antenna Connector of the EUT at the manufacturer side.

## 6. PRELIMINARY TEST

### 6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

### 6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


## 7. MINIMUM 20 dB BANDWIDTH

### 7.1 Operating environment

Temperature : 21.4 °C  
 Relative humidity : 45.1 % R.H.

### 7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

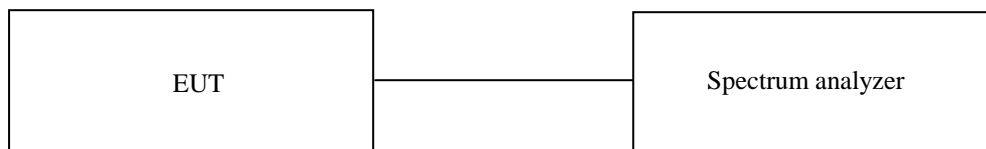

### 7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)


All test equipment used is calibrated on a regular basis.

### 7.4 Test data for 1 Mbps


- Test Date : September 03, 2015

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	924.10
Middle	2 441	929.10
High	2 480	929.10


Tested by: Hyung-Kwon, Oh / Engineer

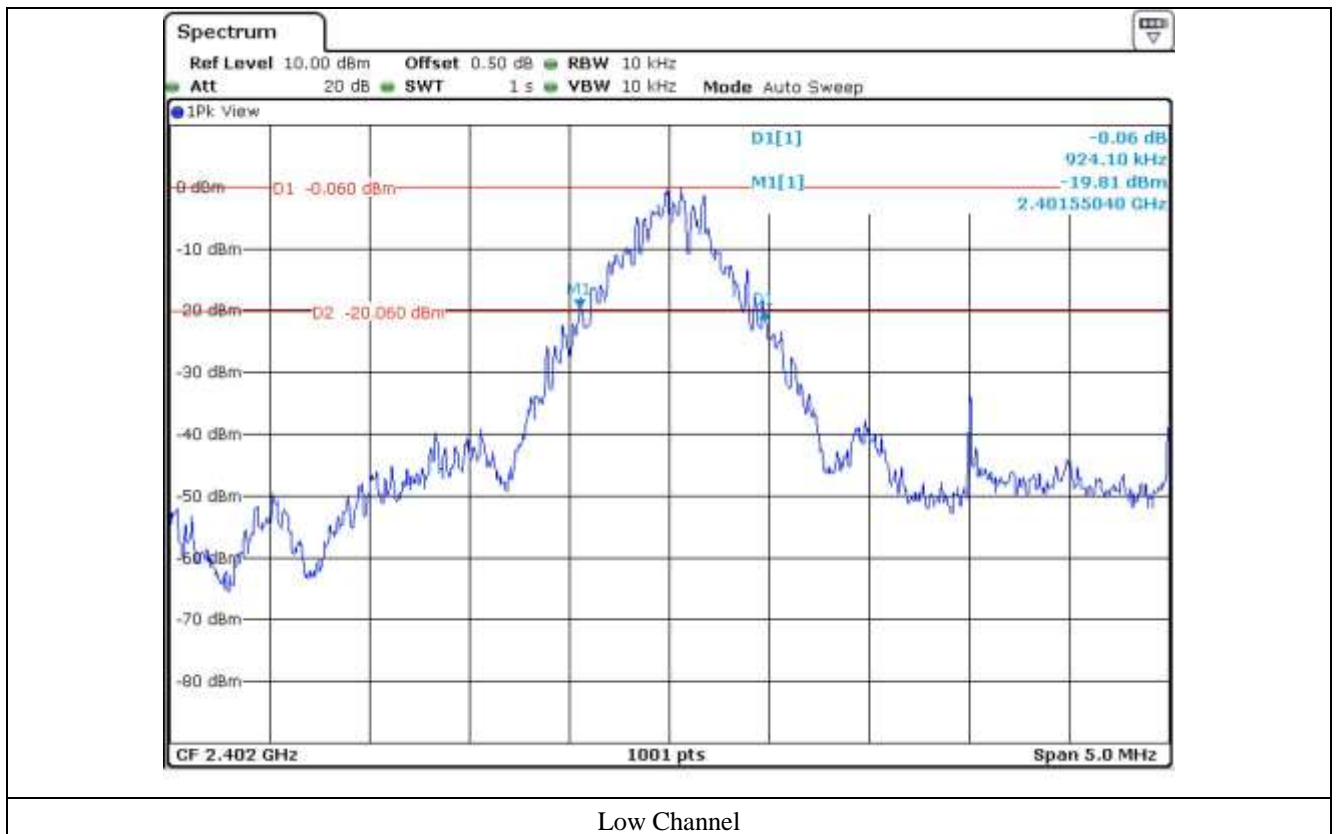

Low Channel

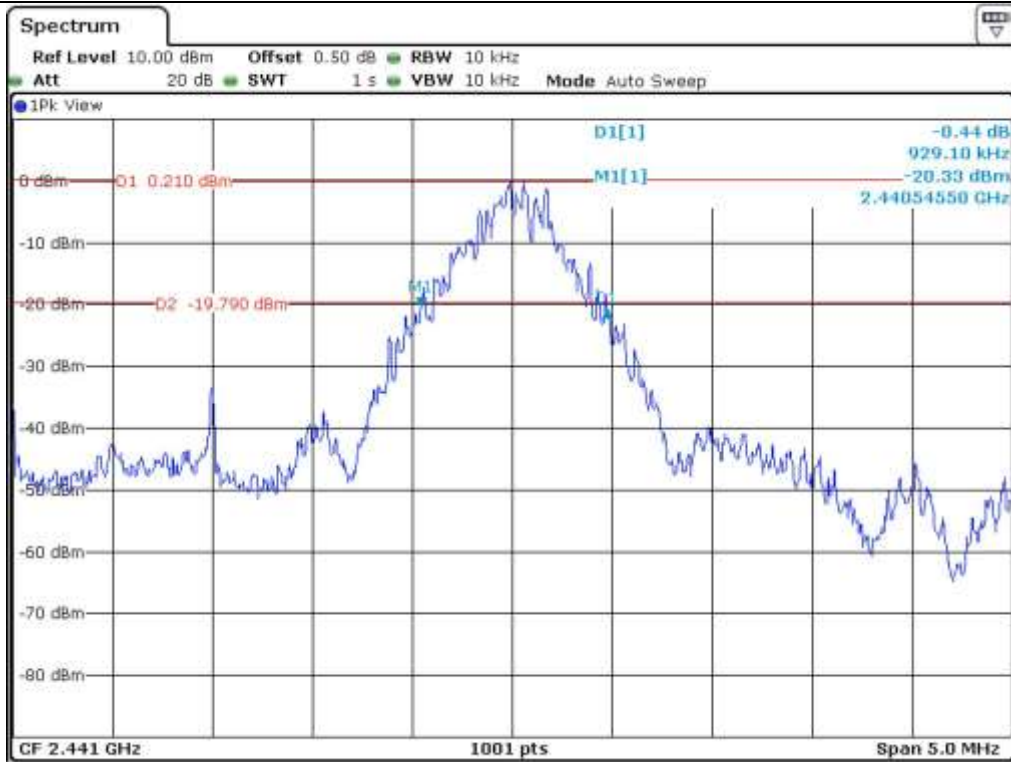

Middle Channel

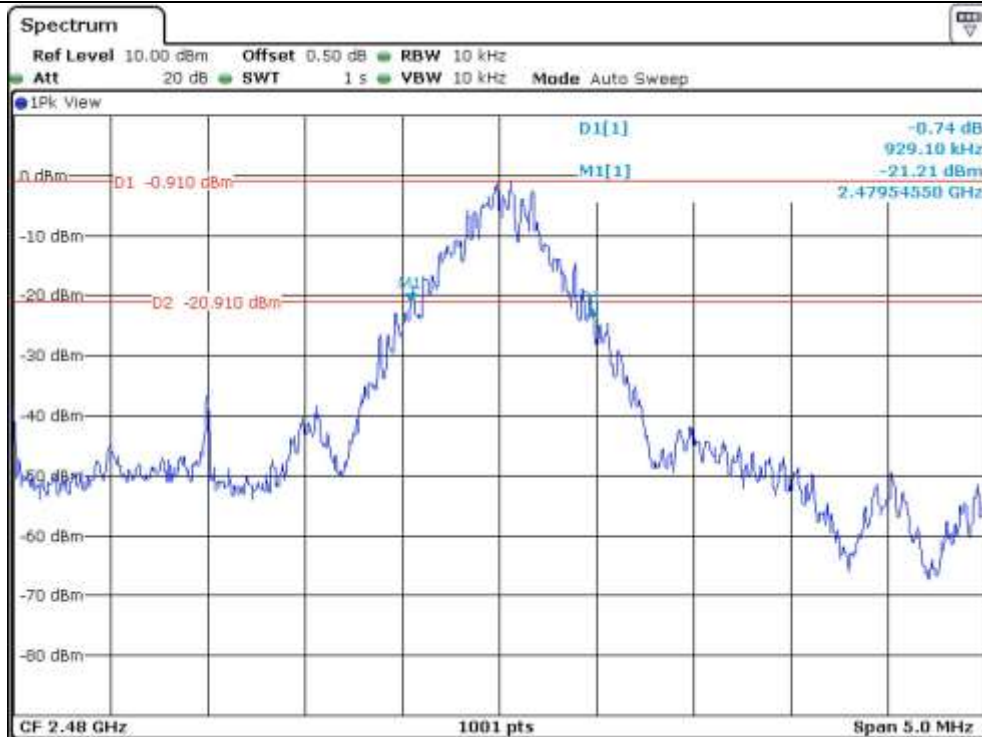

High Channel


**7.5 Test data for 2 Mbps**

- Test Date : September 03, 2015


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 263.70
Middle	2 441	1 303.70
High	2 480	1 303.70




Tested by: Hyung-Kwon, Oh / Engineer

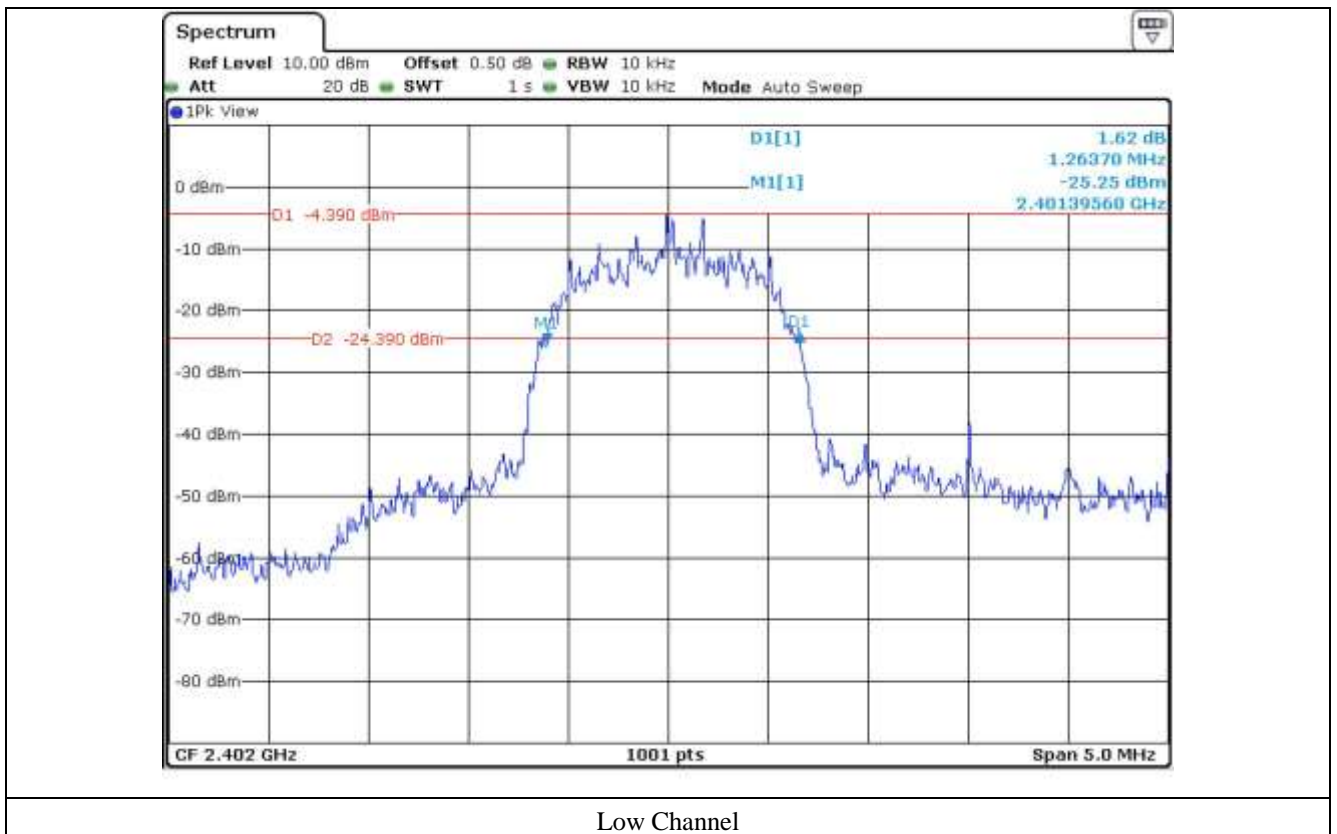

Low Channel

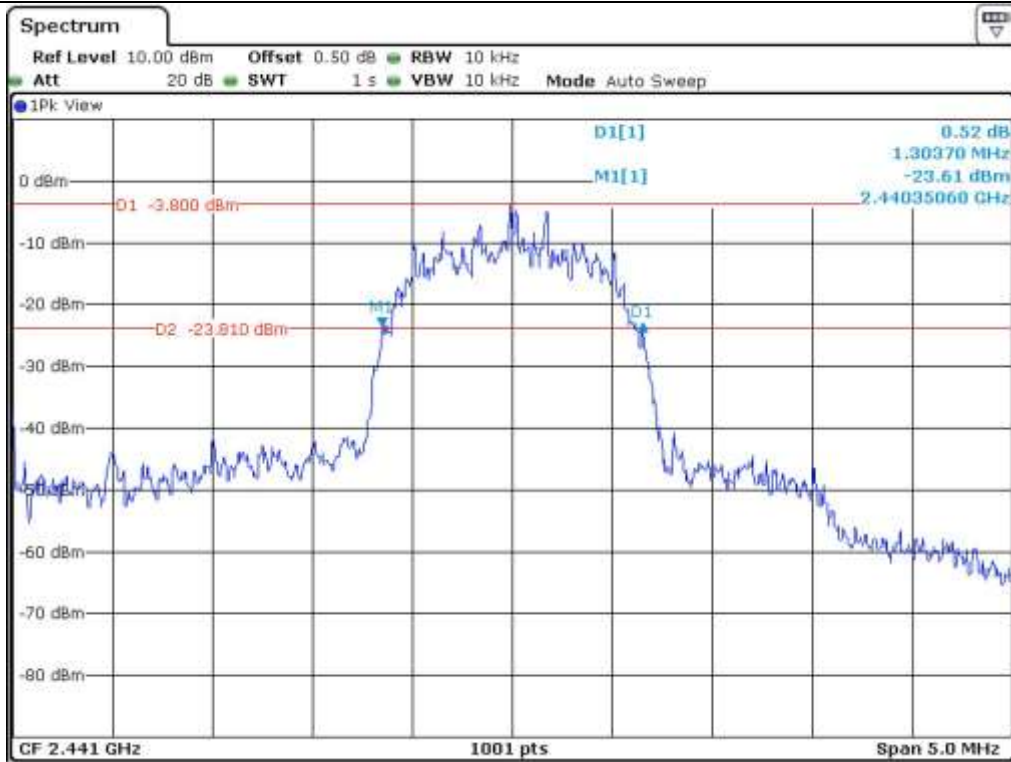

Middle Channel

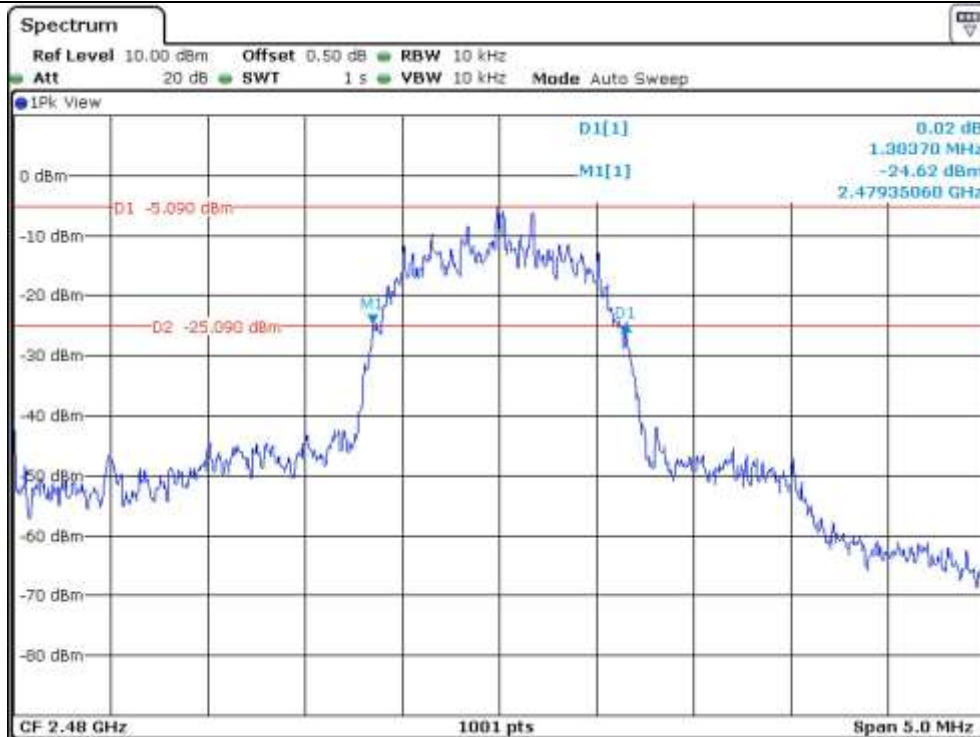

High Channel


7.6 Test data for 3 Mbps

- Test Date : September 03, 2015


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 258.70
Middle	2 441	1 258.70
High	2 480	1 263.70




Tested by: Hyung-Kwon, Oh / Engineer

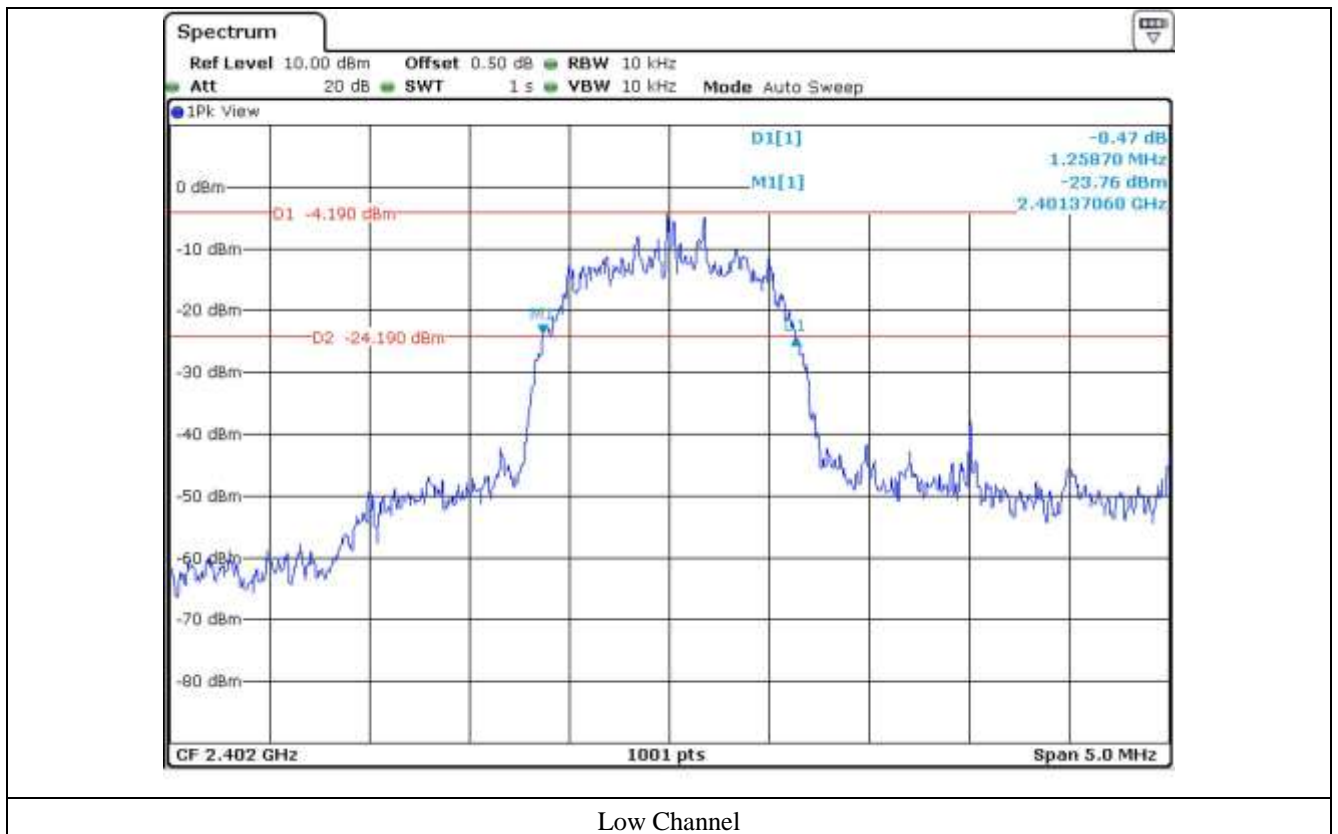



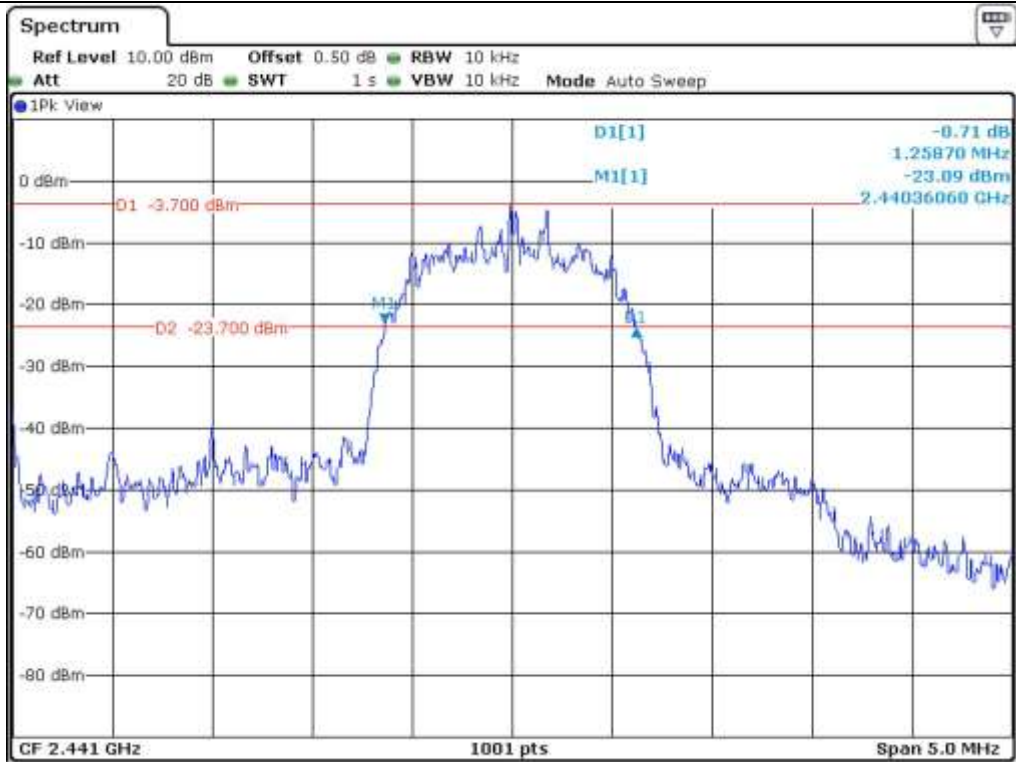

Middle Channel

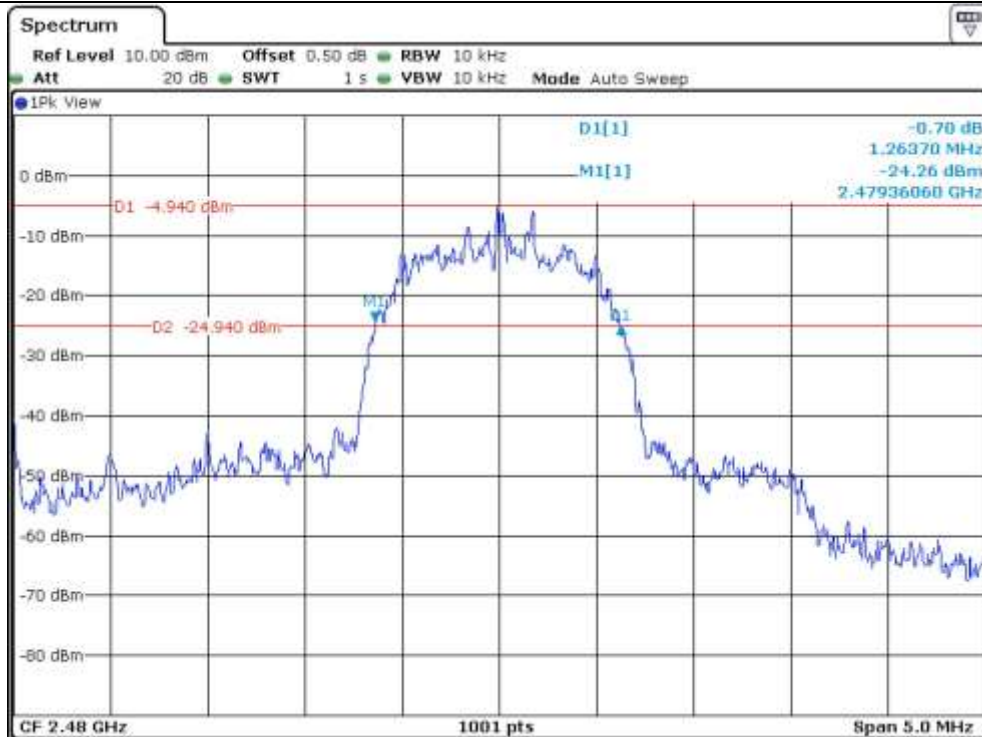

High Channel


## 8. HOPPING FREQUENCY SEPARATION

### 8.1 Operating environment

Temperature : 21.4 °C  
 Relative humidity : 45.1 % R.H.

### 8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

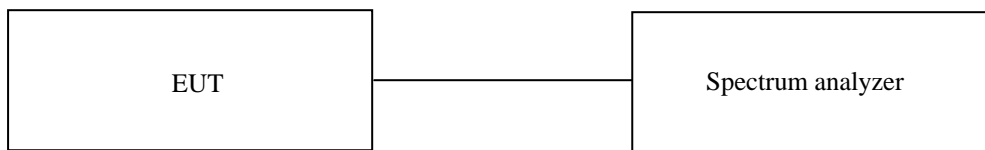

### 8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.

**8.4 Test data for 1 Mbps**


- Test Date : September 03, 2015

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	619.40	Separated by a minimum of 25 kHz



**Tested by: Hyung-Kwon, Oh / Engineer**

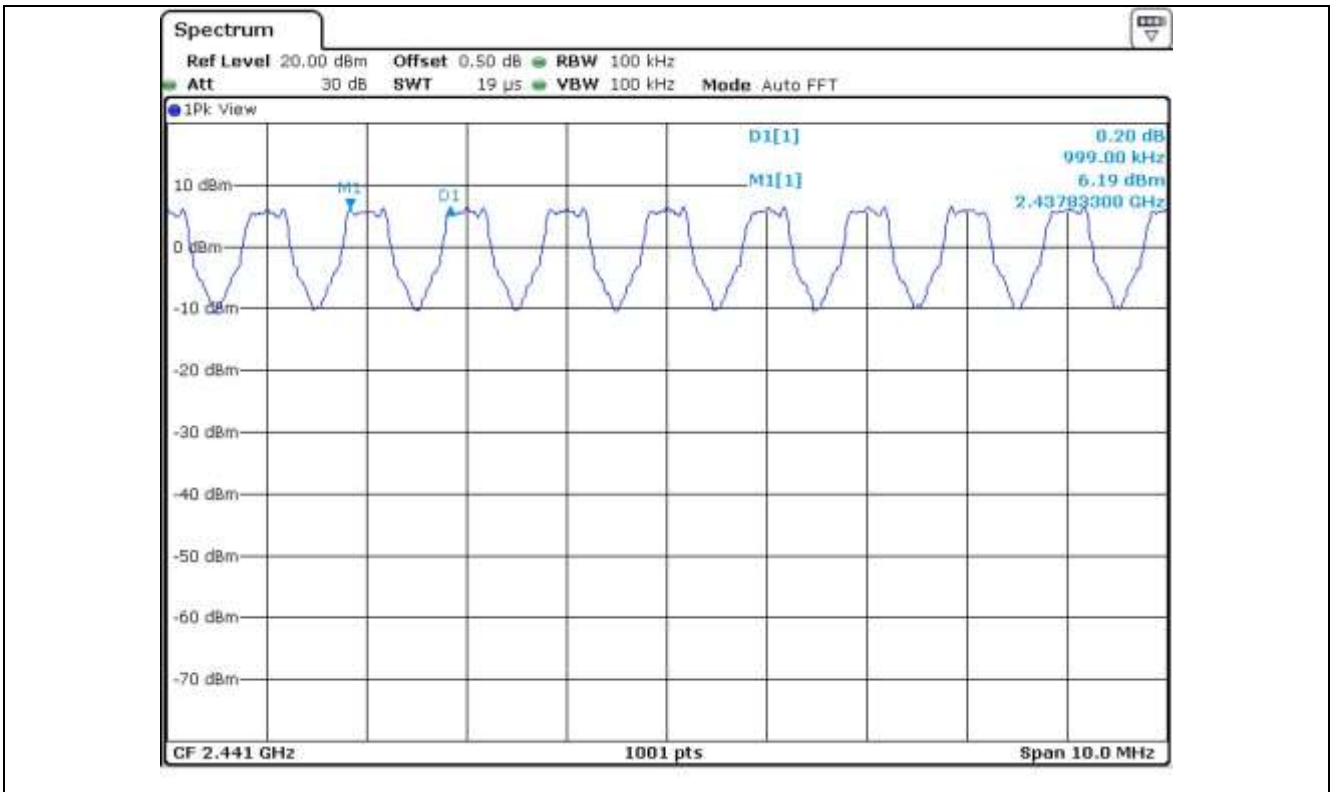


### 8.5 Test data for 2 Mbps

- Test Date : September 03, 2015

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	869.13	Separated by a minimum of 25 kHz

Tested by: Hyung-Kwon, Oh / Engineer

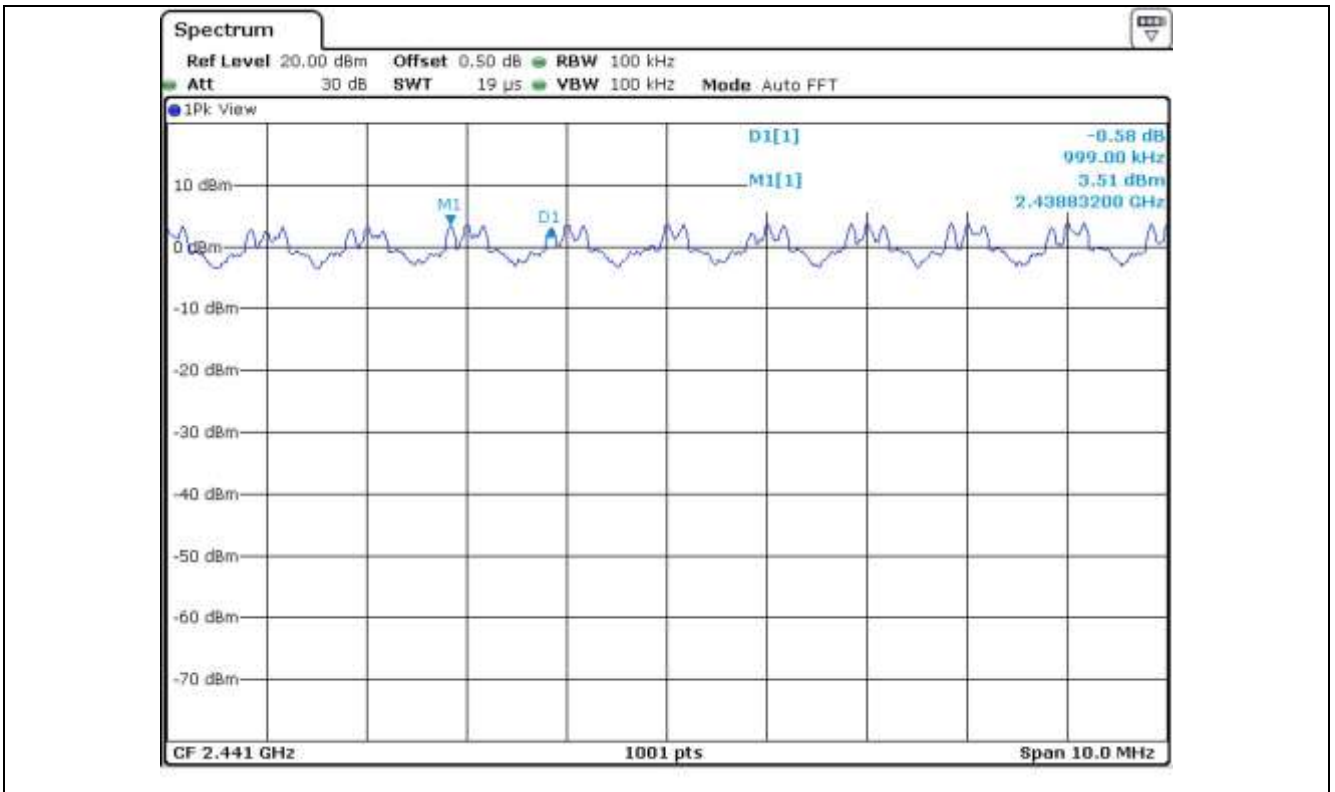


### 8.6 Test data for 3 Mbps

- Test Date : September 03, 2015

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	839.13	Separated by a minimum of 25 kHz

Tested by: Hyung-Kwon, Oh / Engineer

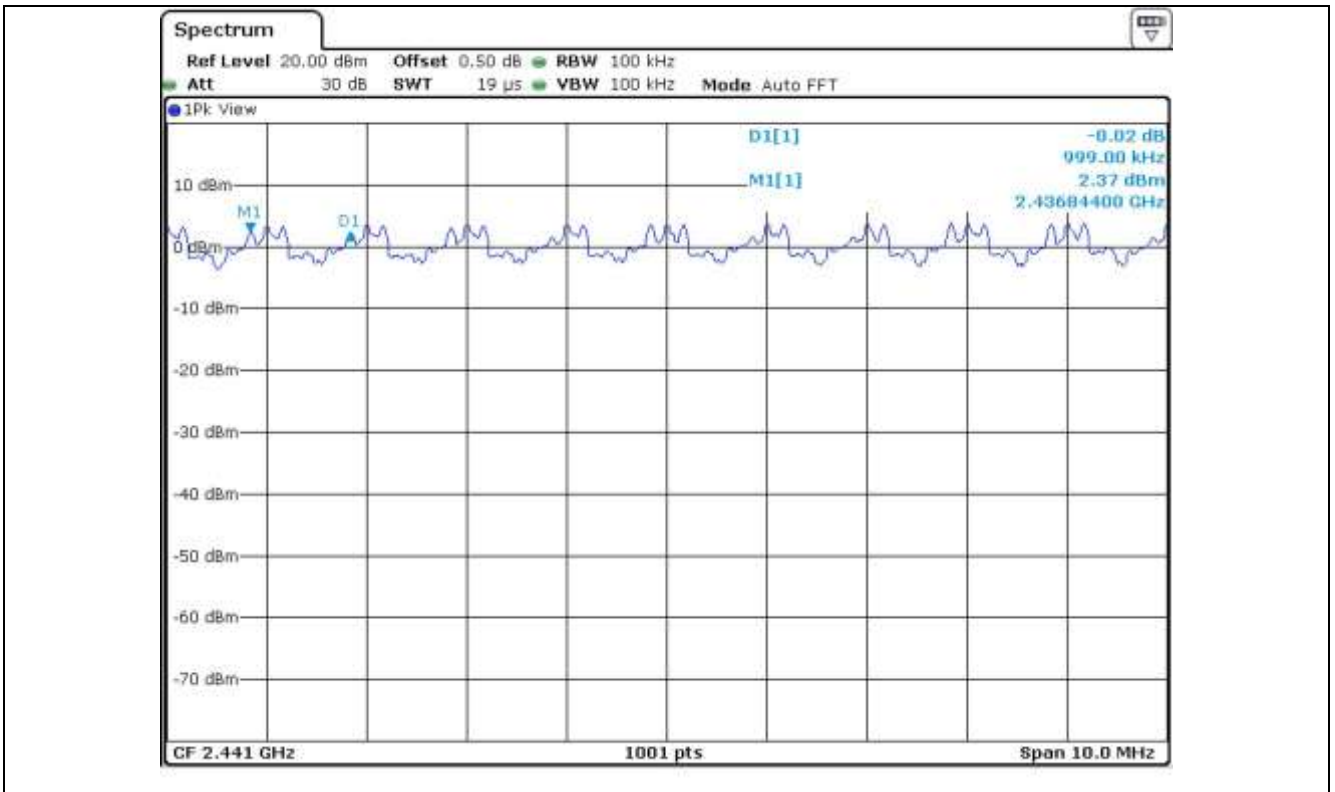


## 9. NUMBER OF HOPPING CHANNELS

### 9.1 Operating environment

Temperature : 21.4 °C  
 Relative humidity : 45.1 % R.H.

### 9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 1 MHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

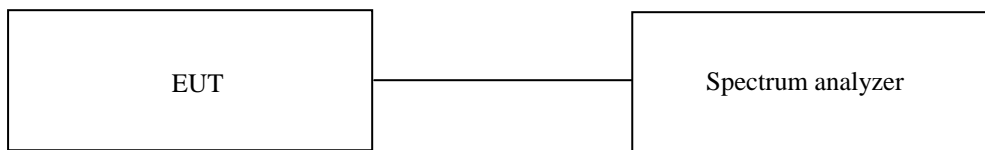

### 9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


**9.4 Test data for 1 Mbps**


- Test Date : September 04, 2015
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64




**Tested by: Hyung-Kwon, Oh / Engineer**

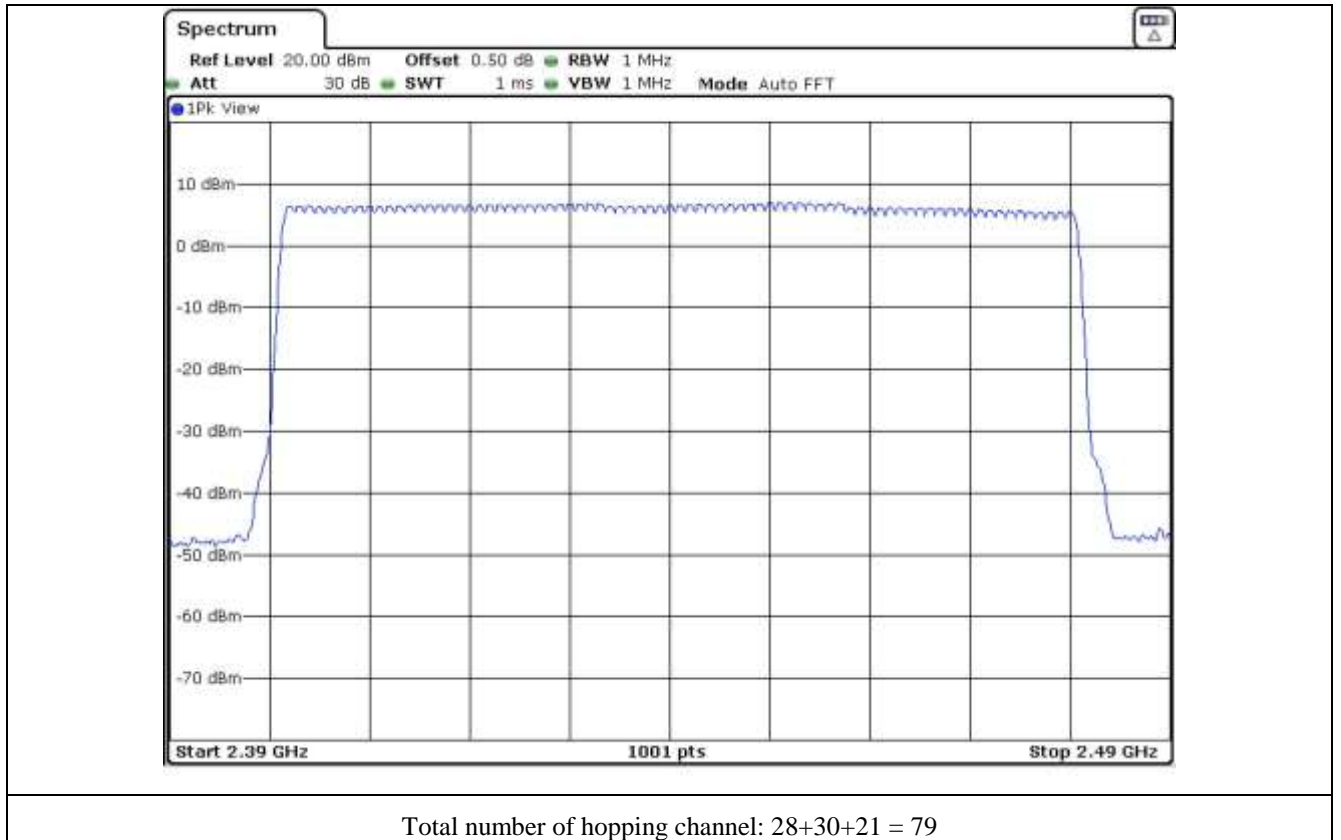

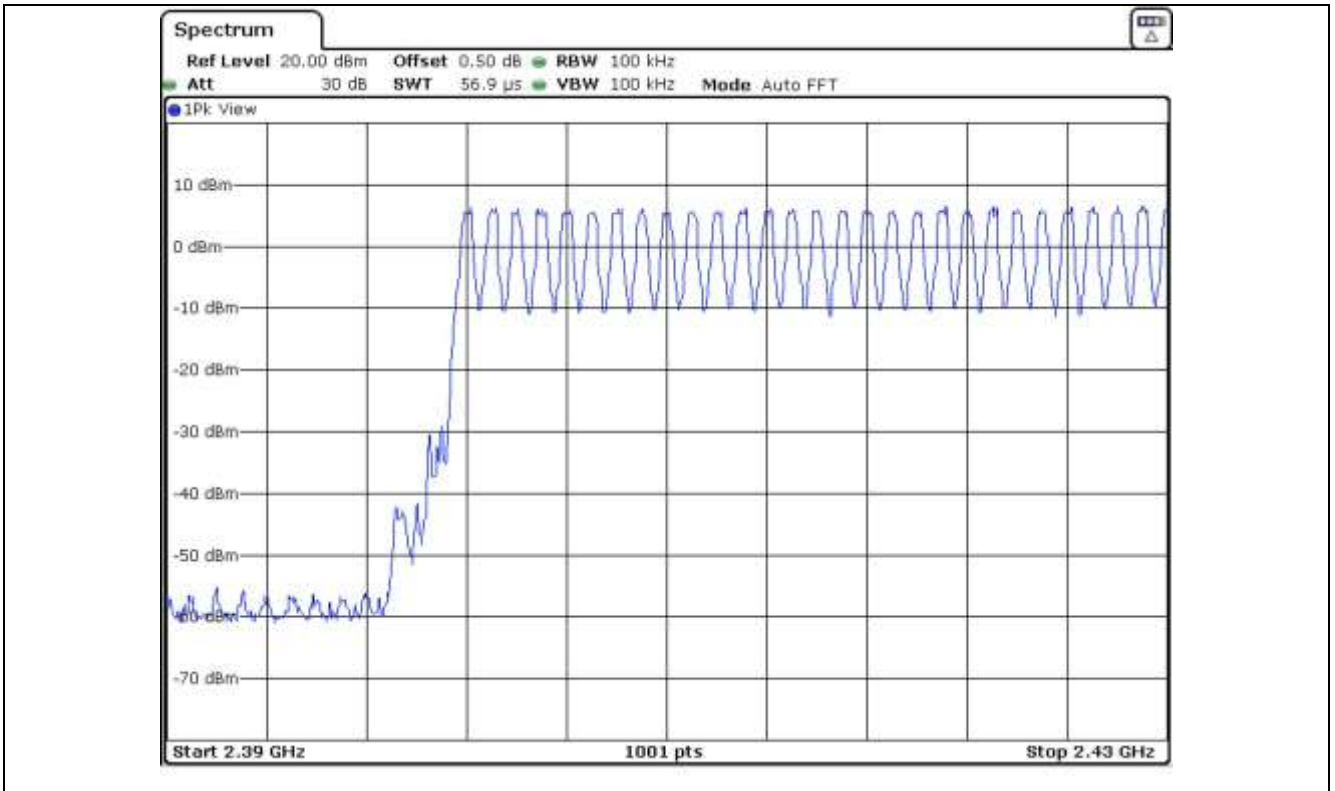


Number of hopping channel: 28

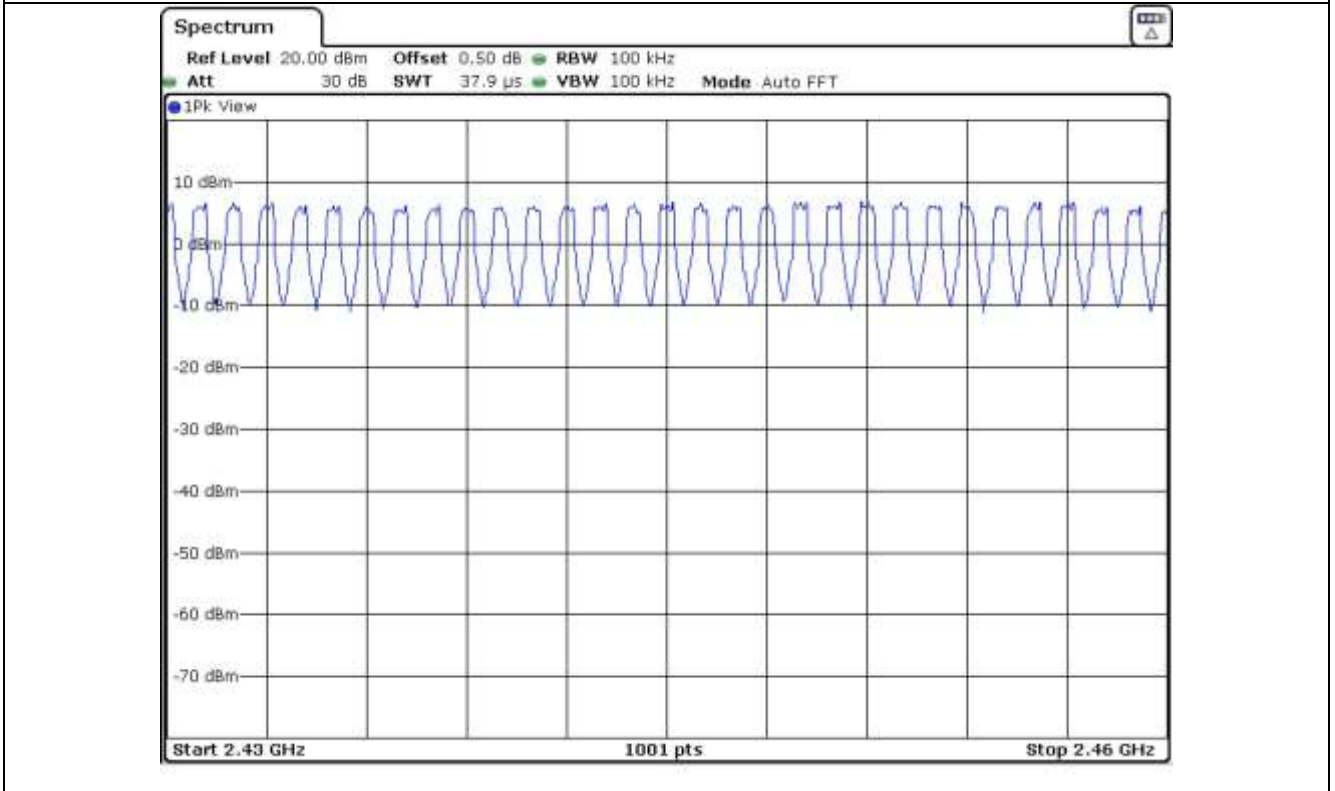

Number of hopping channel: 30



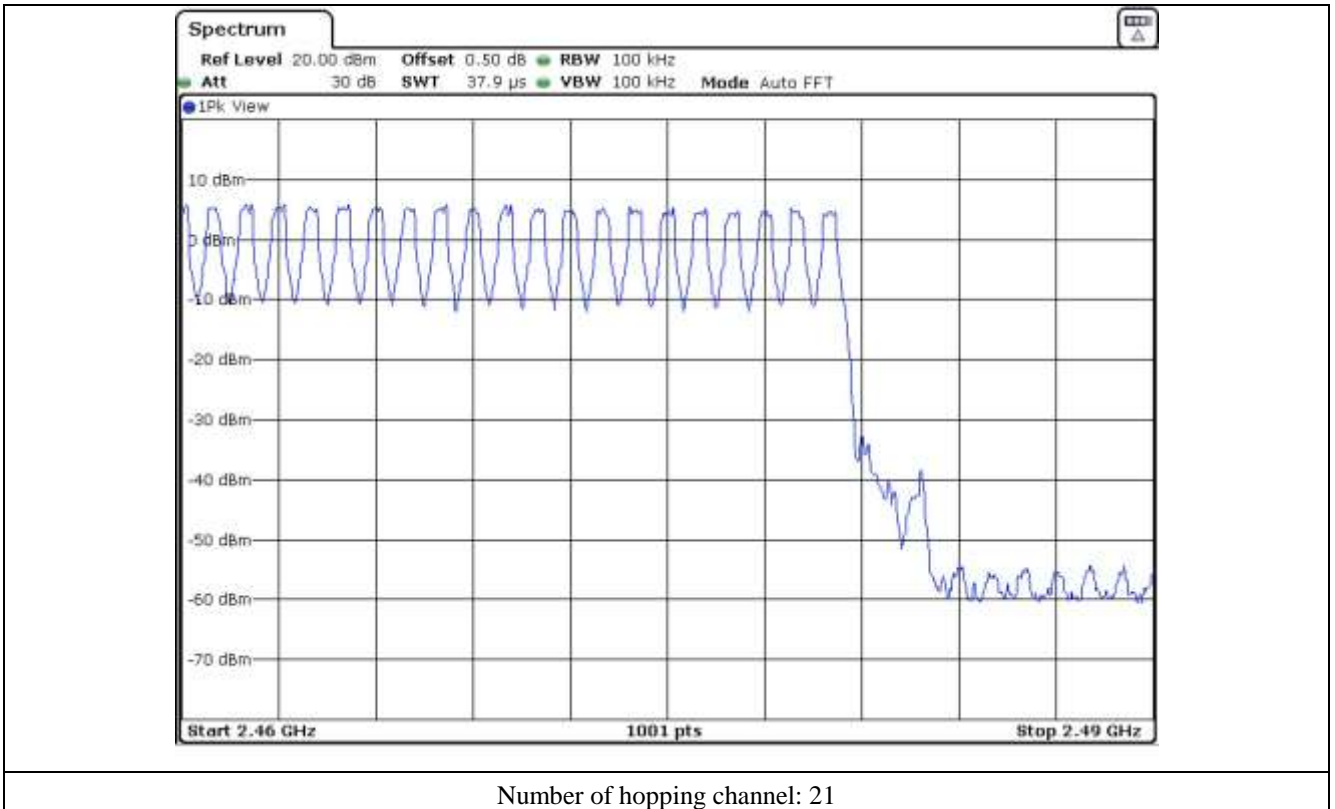

**9.5 Test data for 2 Mbps**


- Test Date : September 04, 2015
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64




**Tested by: Hyung-Kwon, Oh / Engineer**




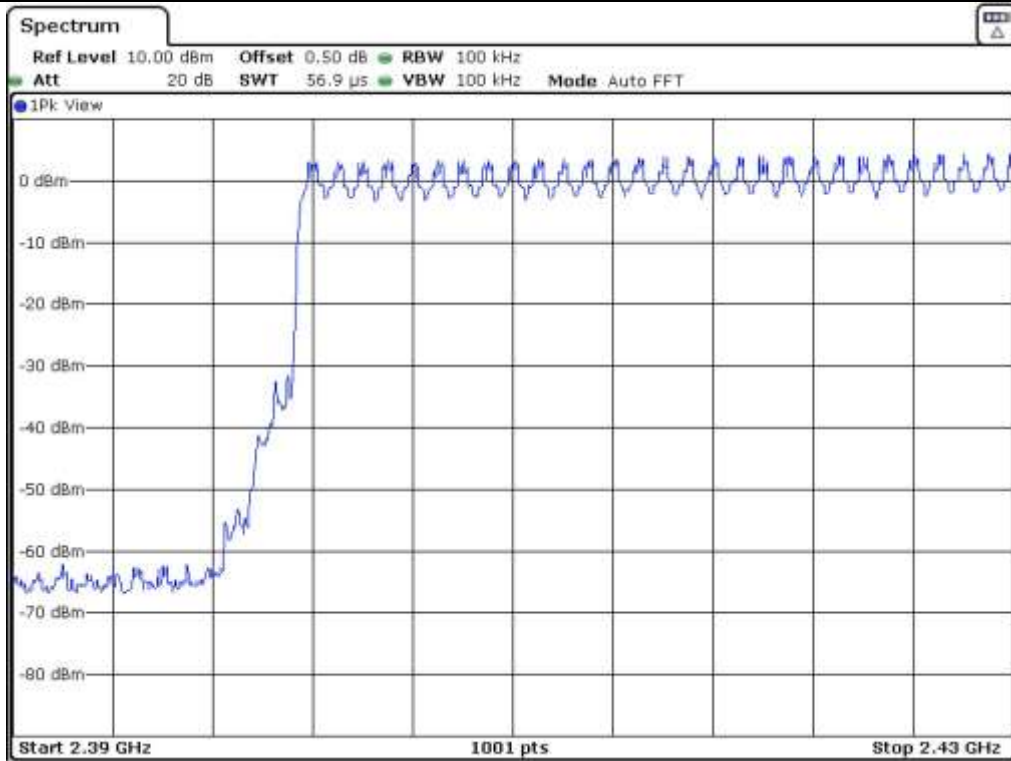

Number of hopping channel: 28

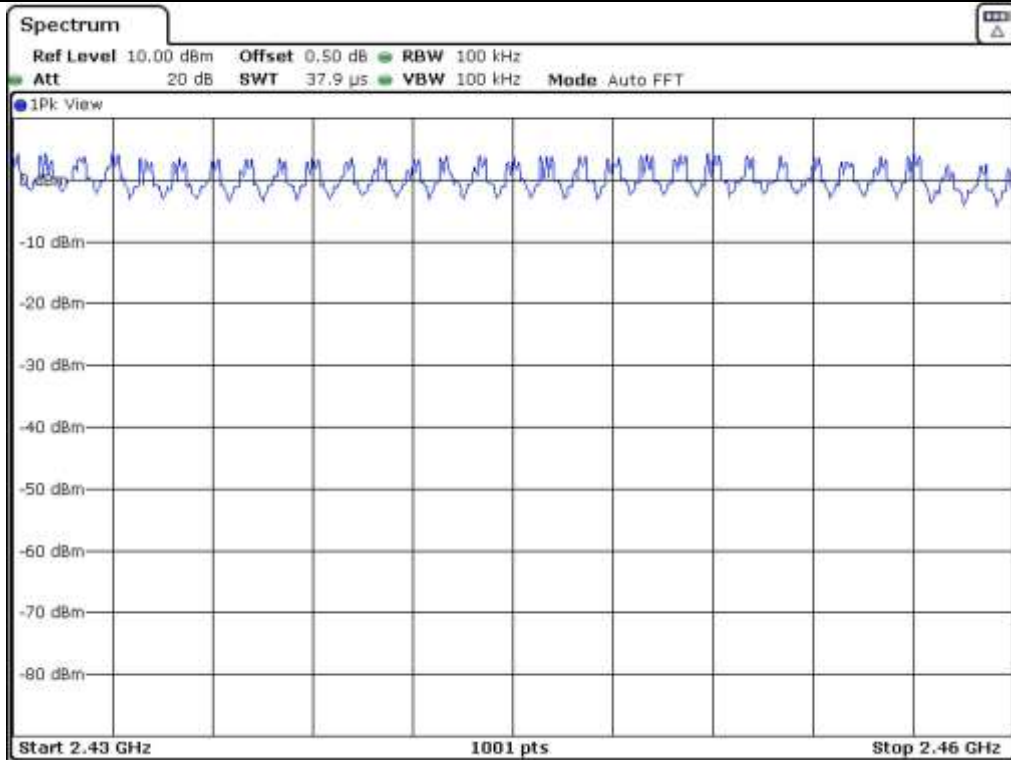

Number of hopping channel: 30

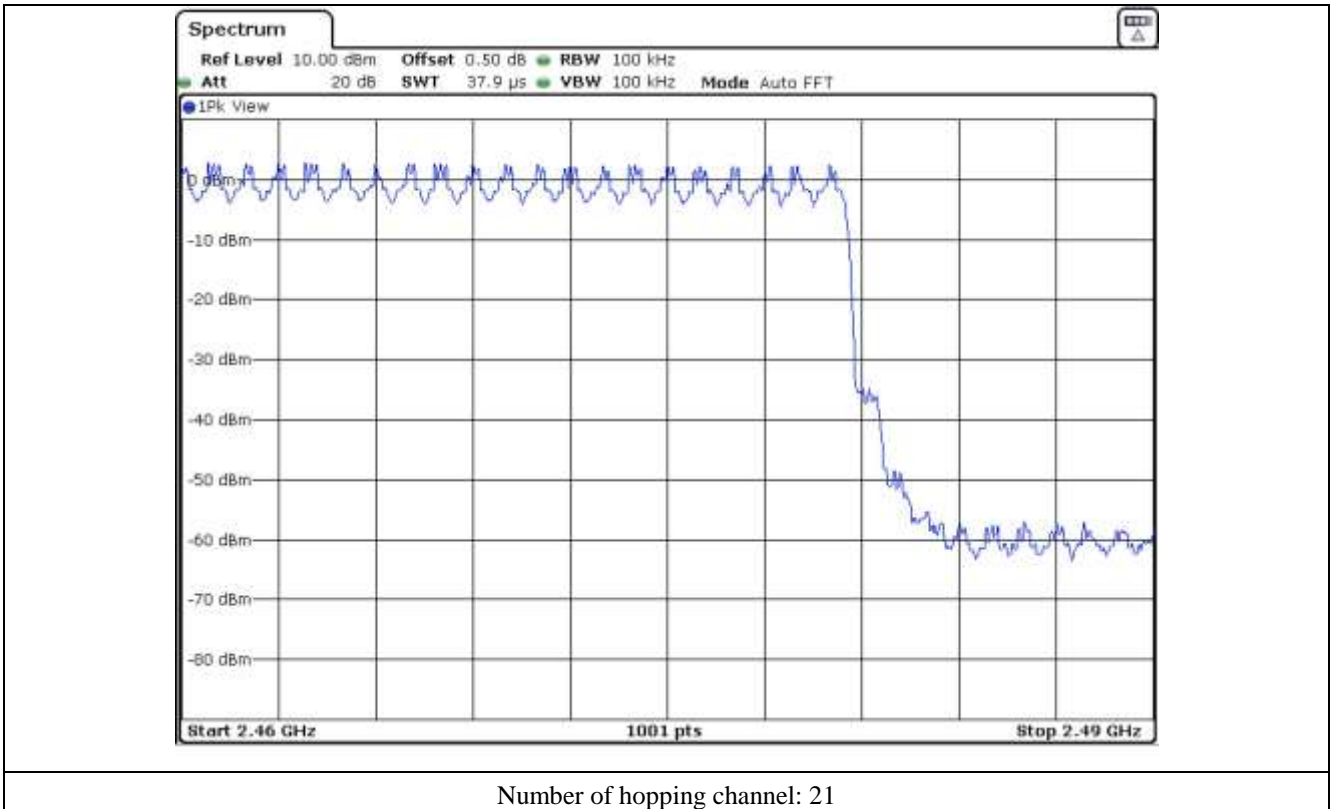


**9.6 Test data for 3 Mbps**


- Test Date : September 04, 2015
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64




**Tested by: Hyung-Kwon, Oh / Engineer**

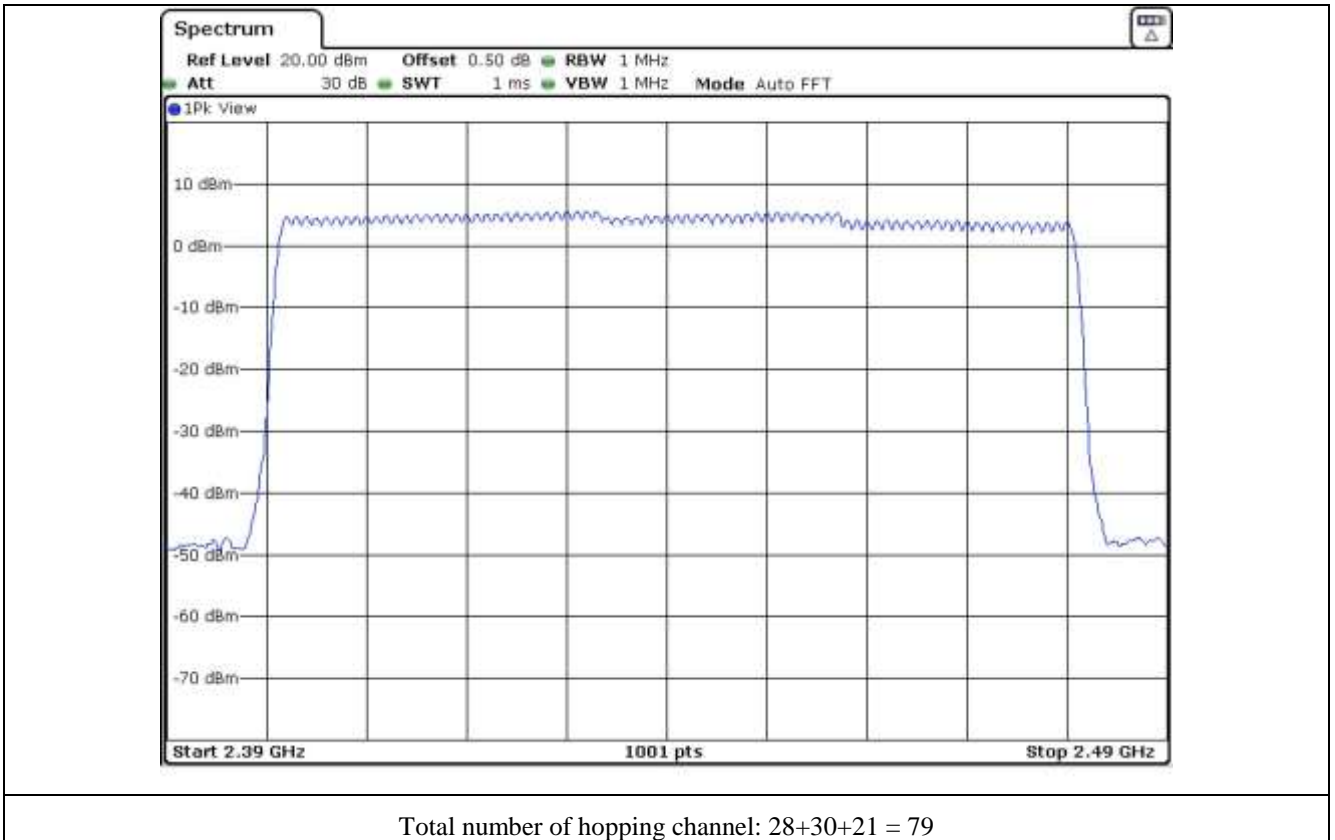


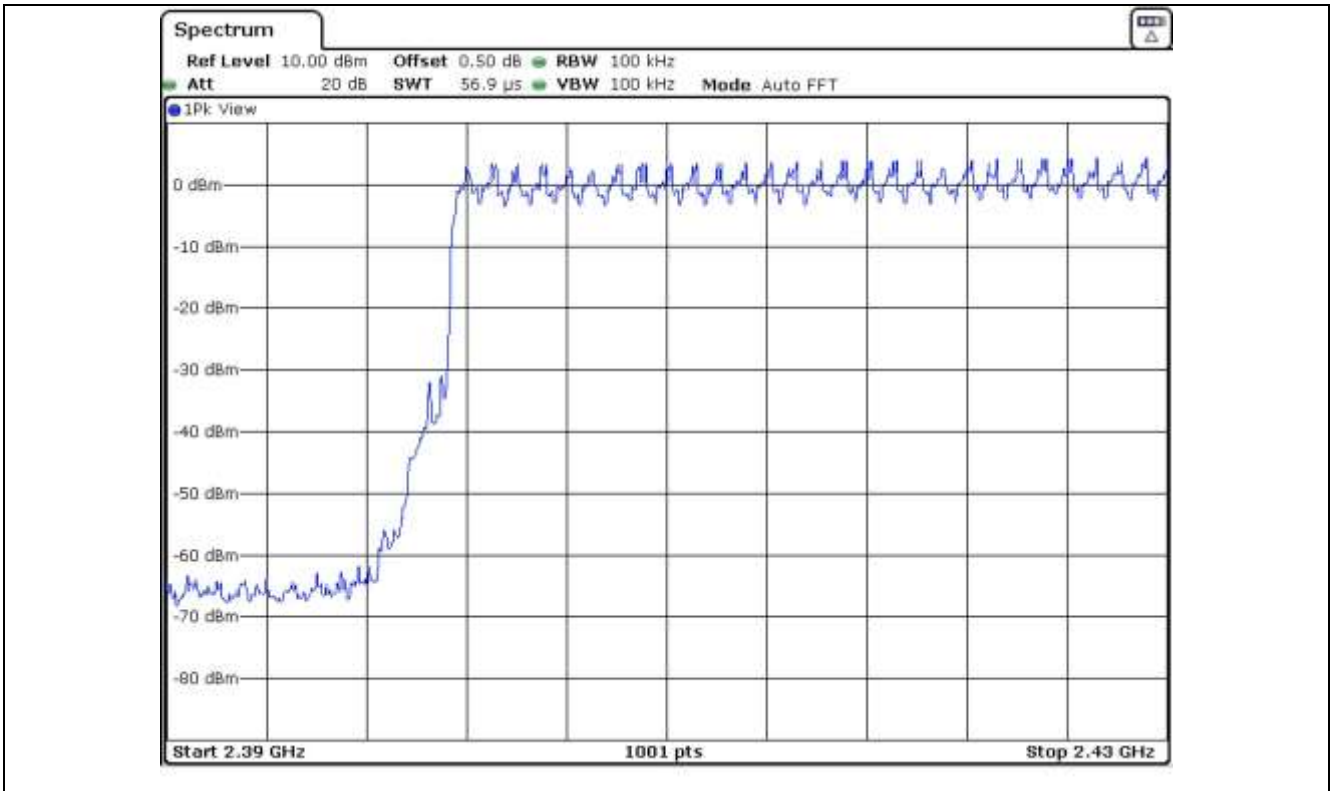

Number of hopping channel: 28

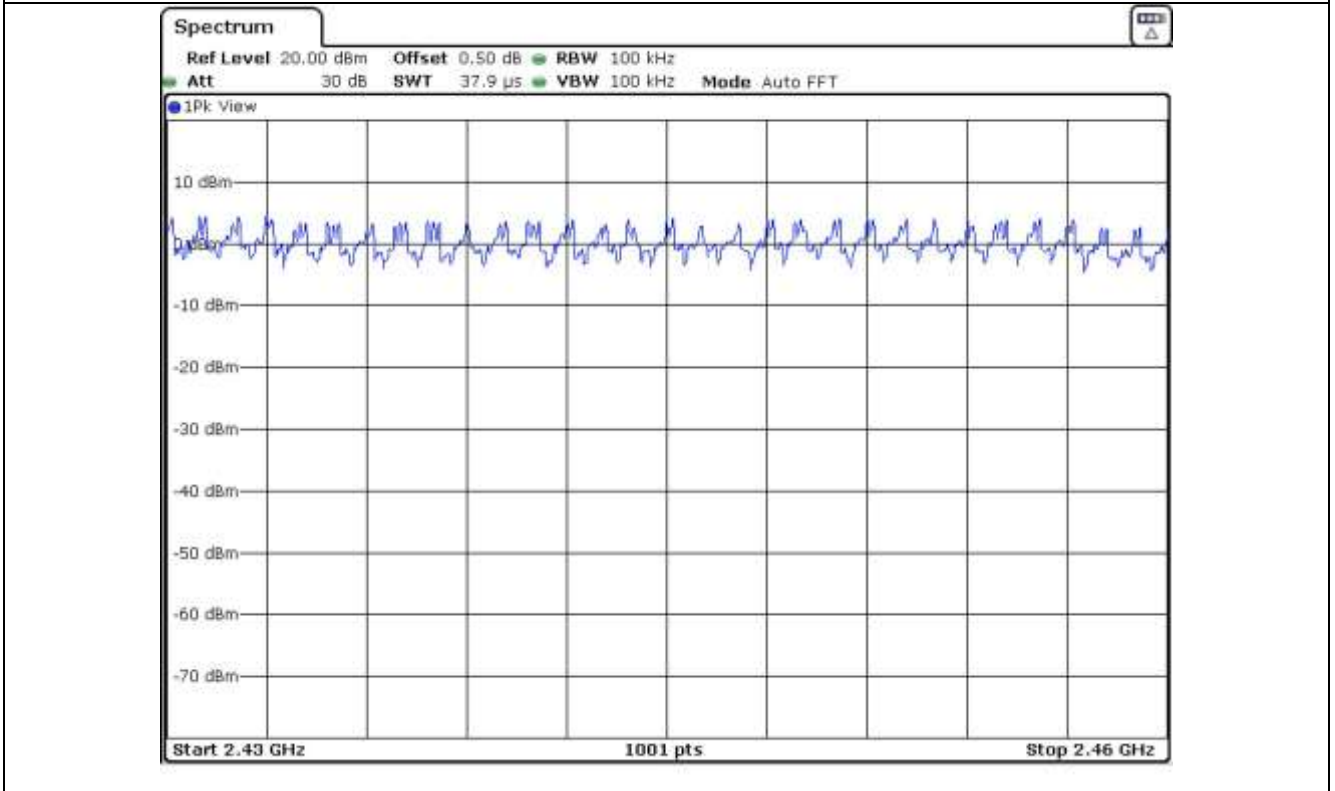

Number of hopping channel: 30

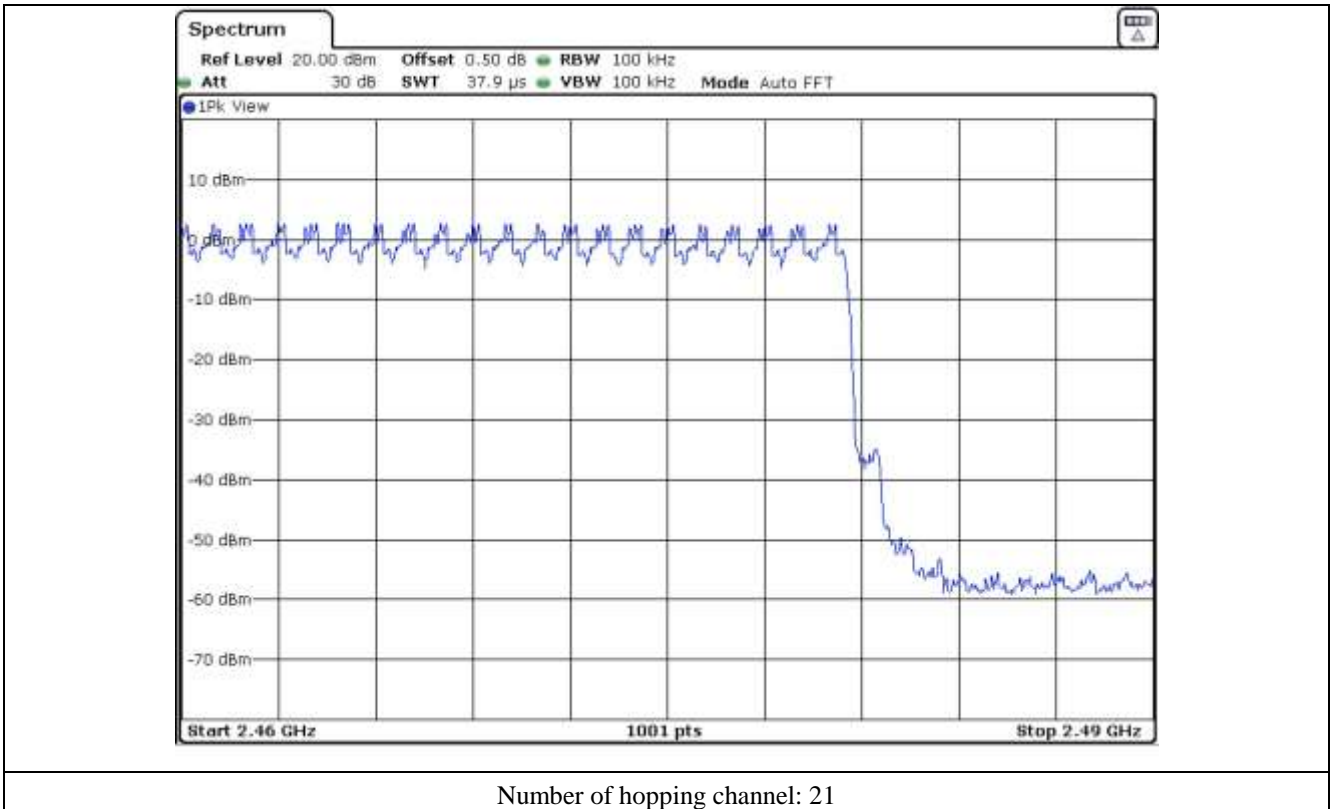


## 10. TIME OF OCCUPANCY

### 10.1 Operating environment

Temperature : 21.4 °C  
 Relative humidity : 45.1 % R.H.

### 10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

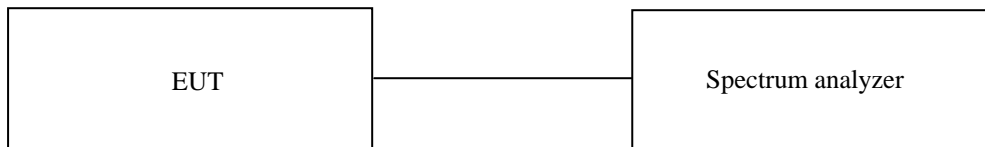

### 10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.



**10.4 Test data for 1 Mbps**

- Test Date : September 04, 2015

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.380	10.13	31.6	121.64	400	PASS
DH3	1.620	5.06	31.6	259.03	400	
DH5	2.880	3.38	31.6	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




**Tested by: Hyung-Kwon, Oh / Engineer**

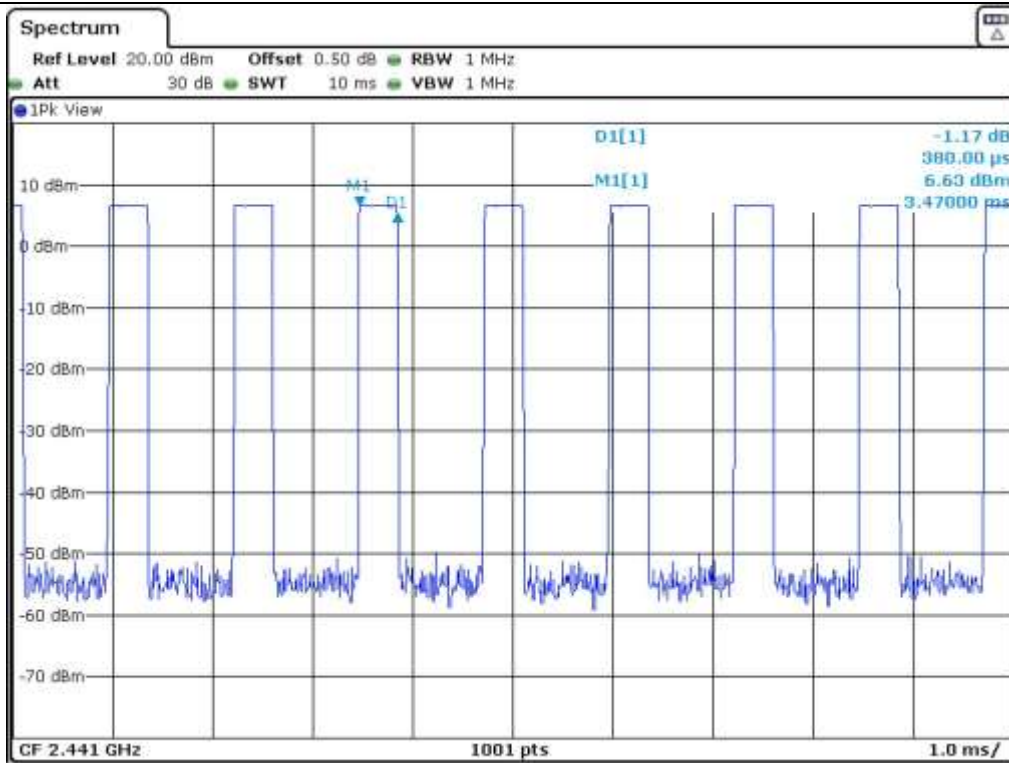

DH1

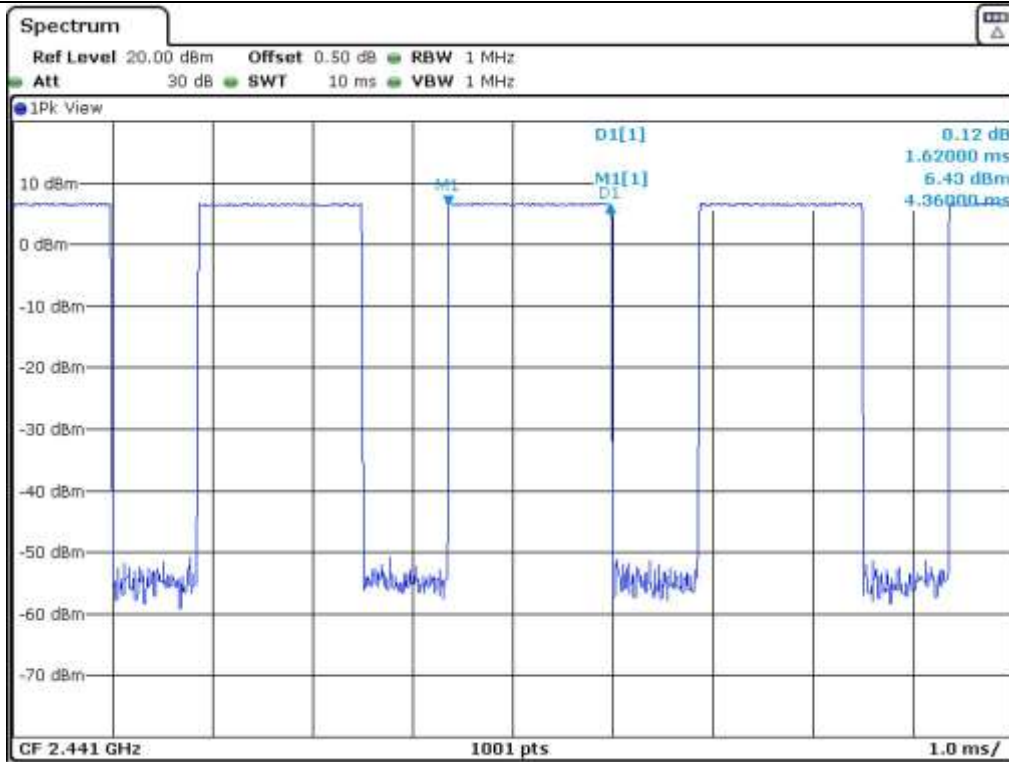

DH3

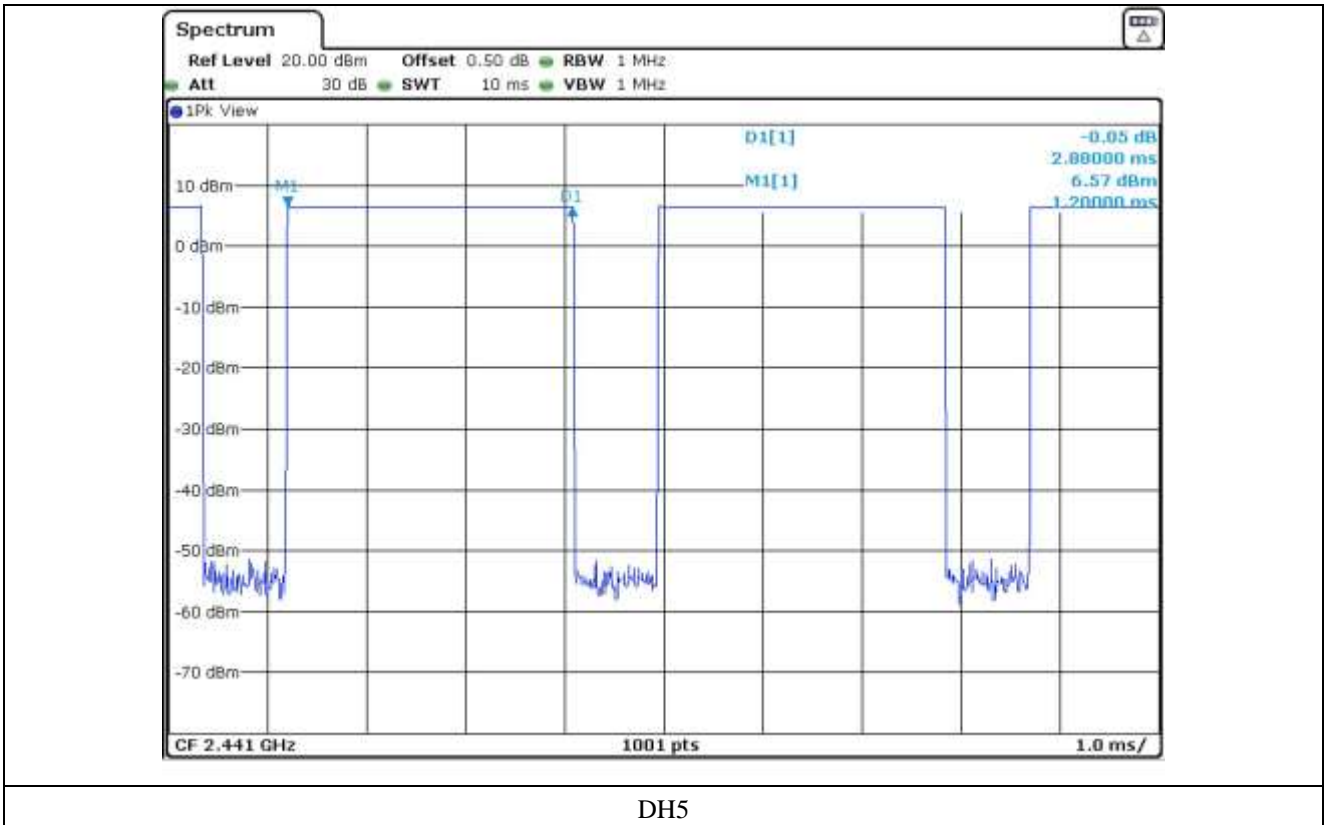

**10.5 Test data for 2 Mbps**

- Test Date : September 04, 2015

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.380	10.13	31.6	121.64	400	PASS
DH3	1.640	5.06	31.6	262.23	400	
DH5	2.890	3.38	31.6	308.68	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




**Tested by: Hyung-Kwon, Oh / Engineer**

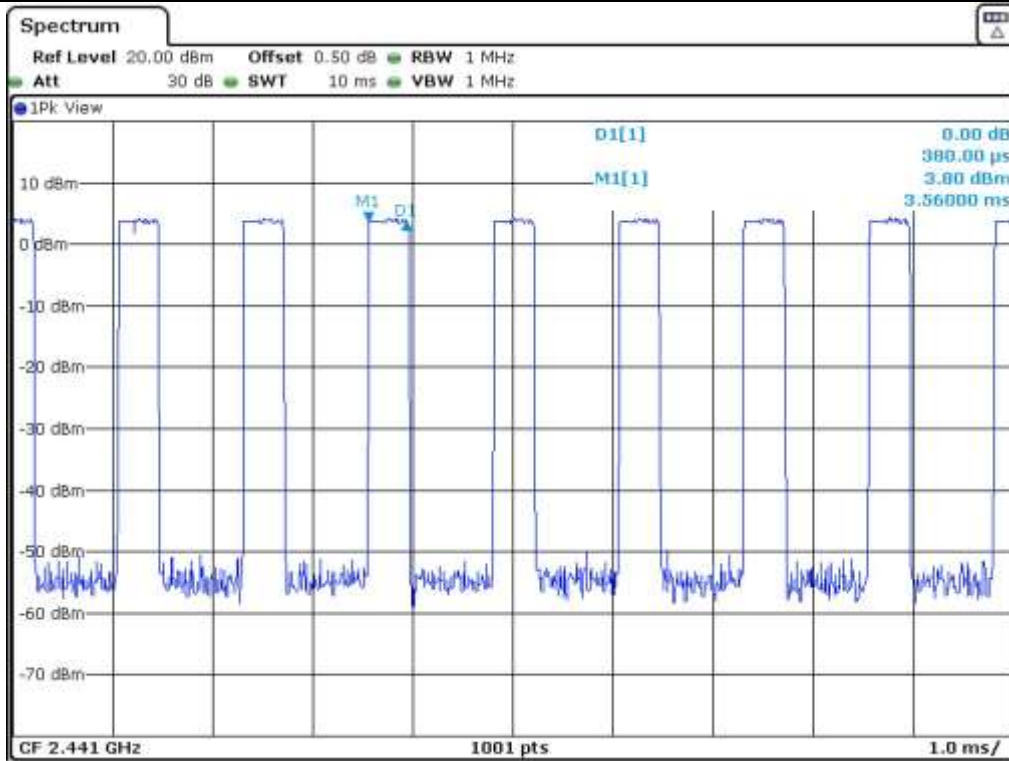

DH1

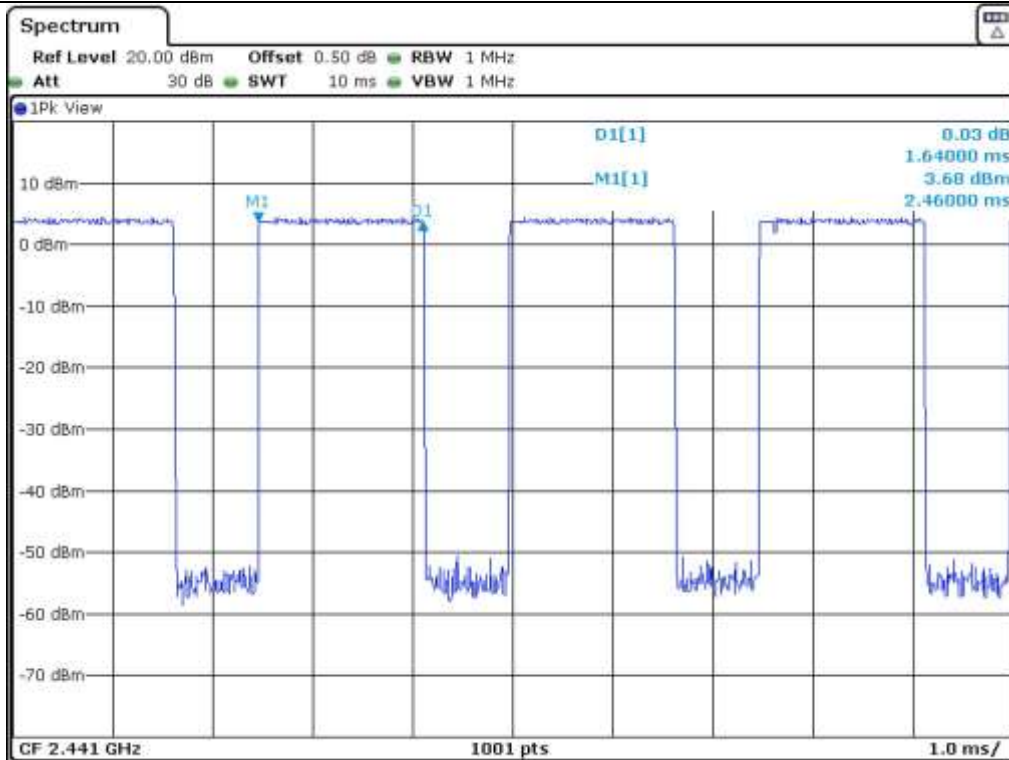

DH3

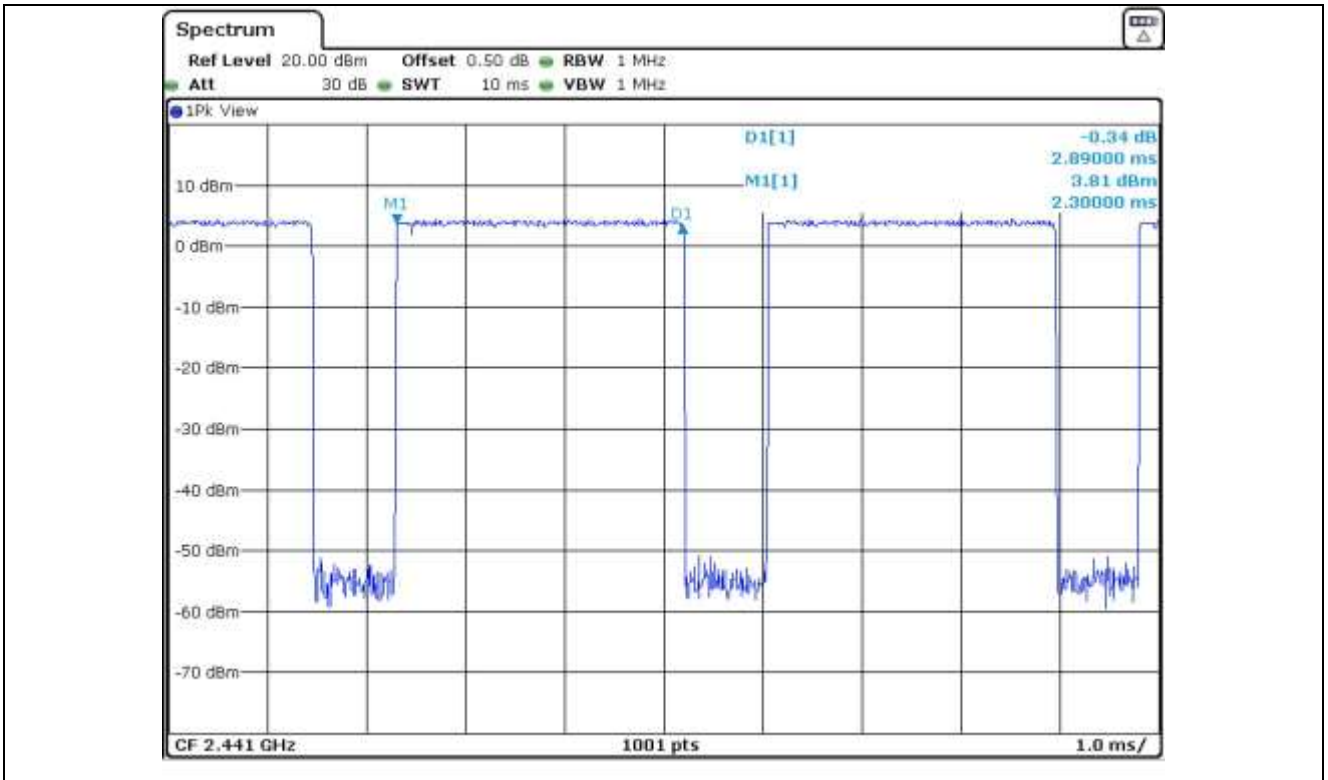

DH5

**10.6 Test data for 3 Mbps**

- Test Date : September 04, 2015

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.380	10.13	31.6	121.64	400	PASS
DH3	1.640	5.06	31.6	262.23	400	
DH5	2.890	3.38	31.6	308.68	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.



**Tested by: Hyung-Kwon, Oh / Engineer**

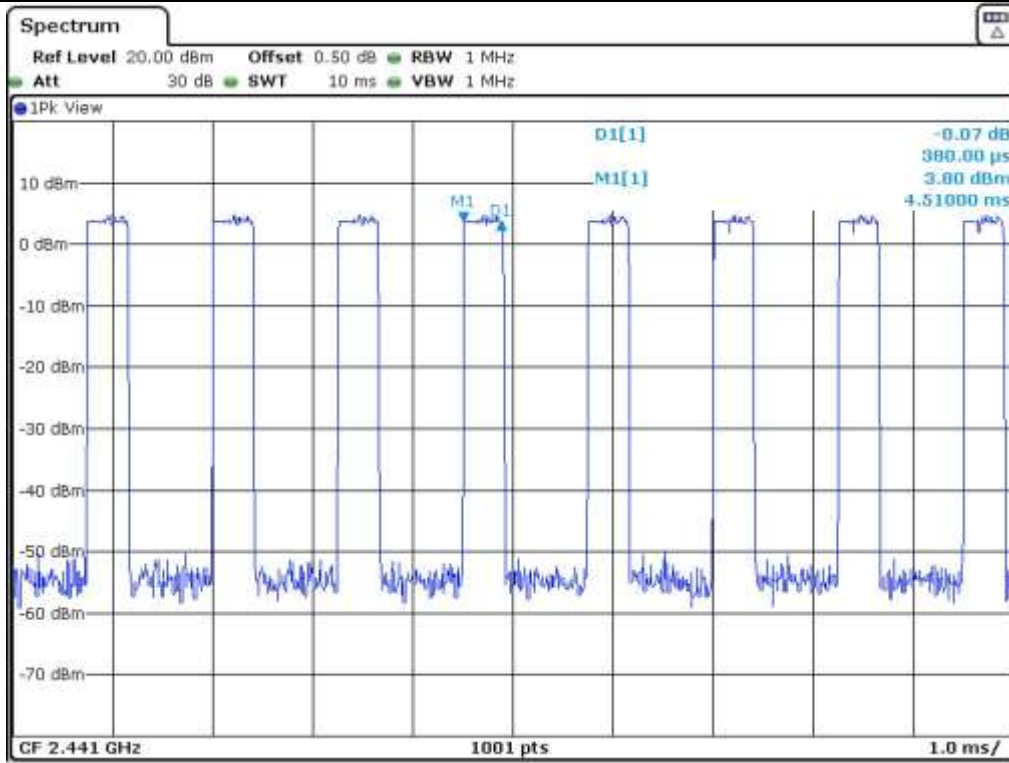


DH1

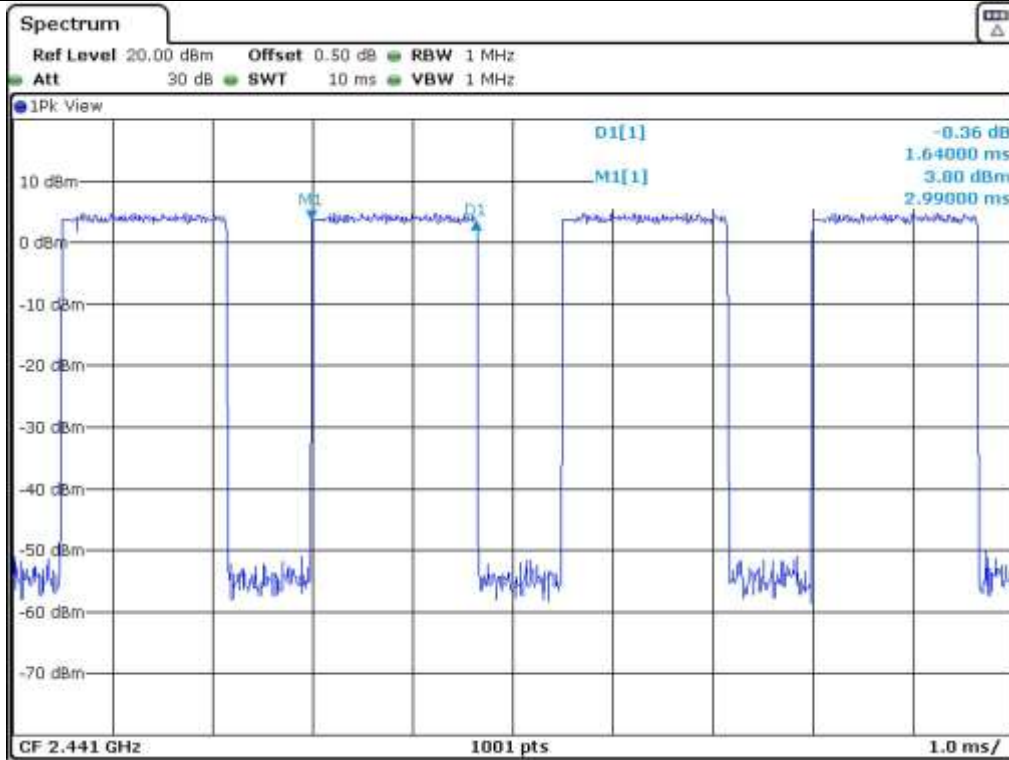

DH3



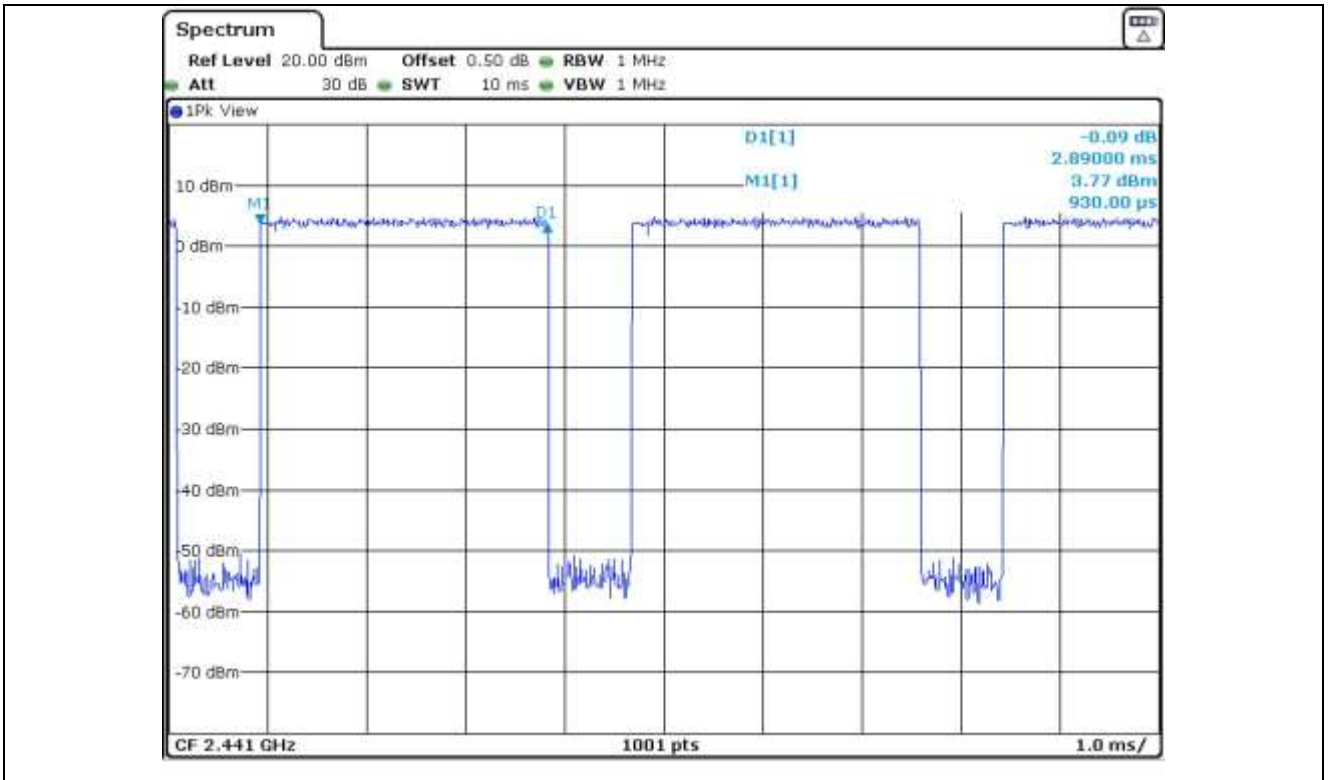

DH5


## 11. MAXIMUM PEAK OUTPUT POWER

### 11.1 Operating environment

Temperature : 21.4 °C  
 Relative humidity : 45.1 % R.H

### 11.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency.

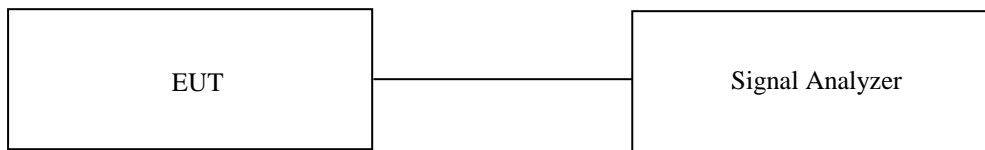

### 11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.

**11.4 Test data for 1 Mbps**


- Test Date : September 04, 2015


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	6.38	21.00	14.62
MIDDLE	2 441	6.70	21.00	14.30
HIGH	2 480	5.55	21.00	15.45


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Hyung-Kwon, Oh / Engineer

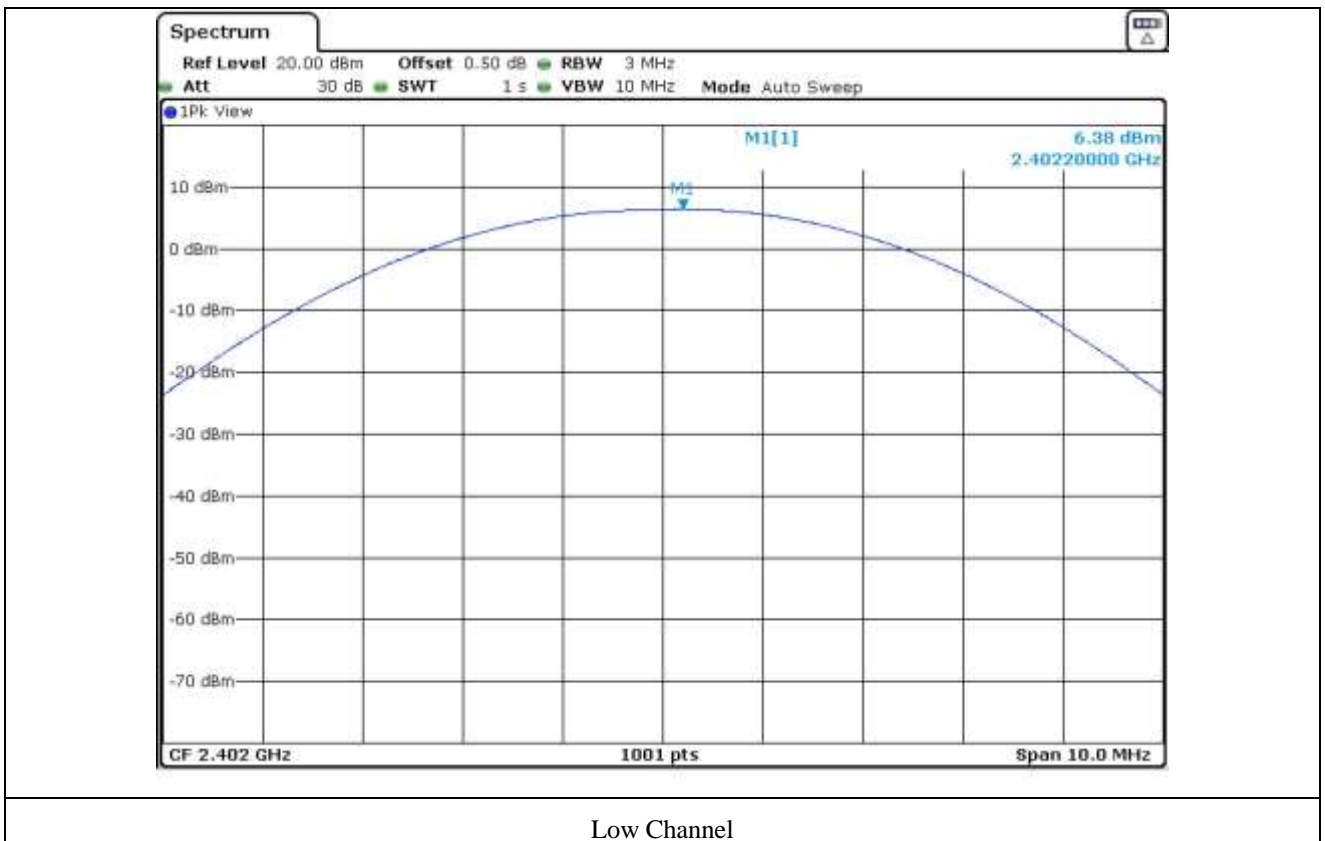

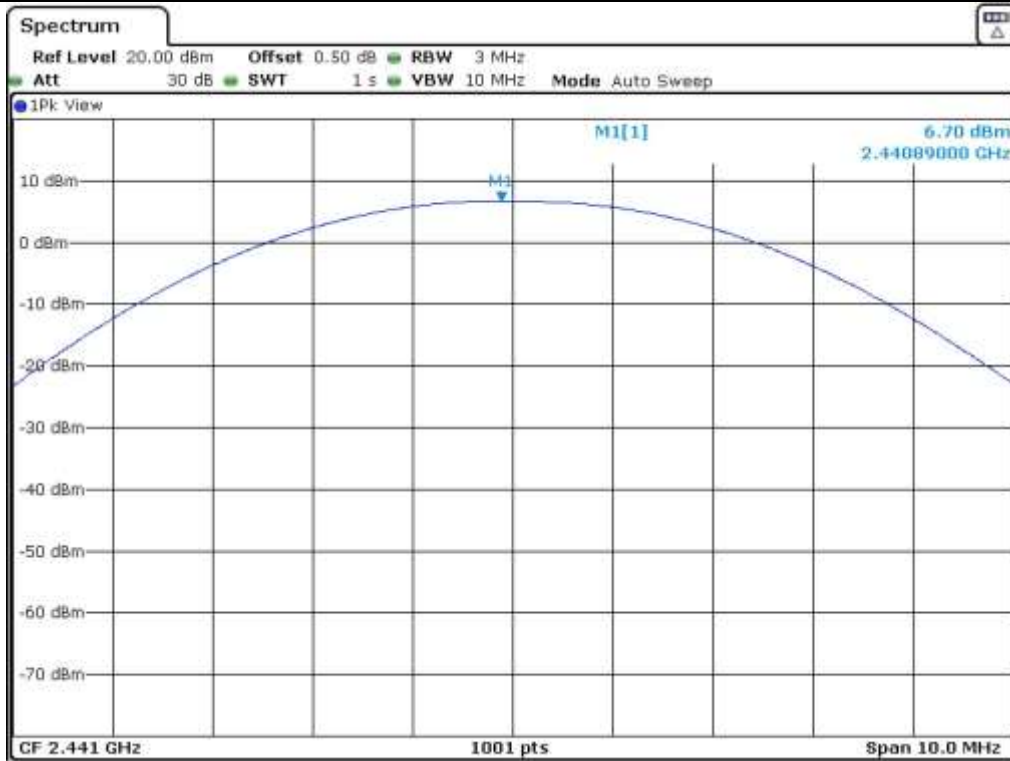

Middle Channel

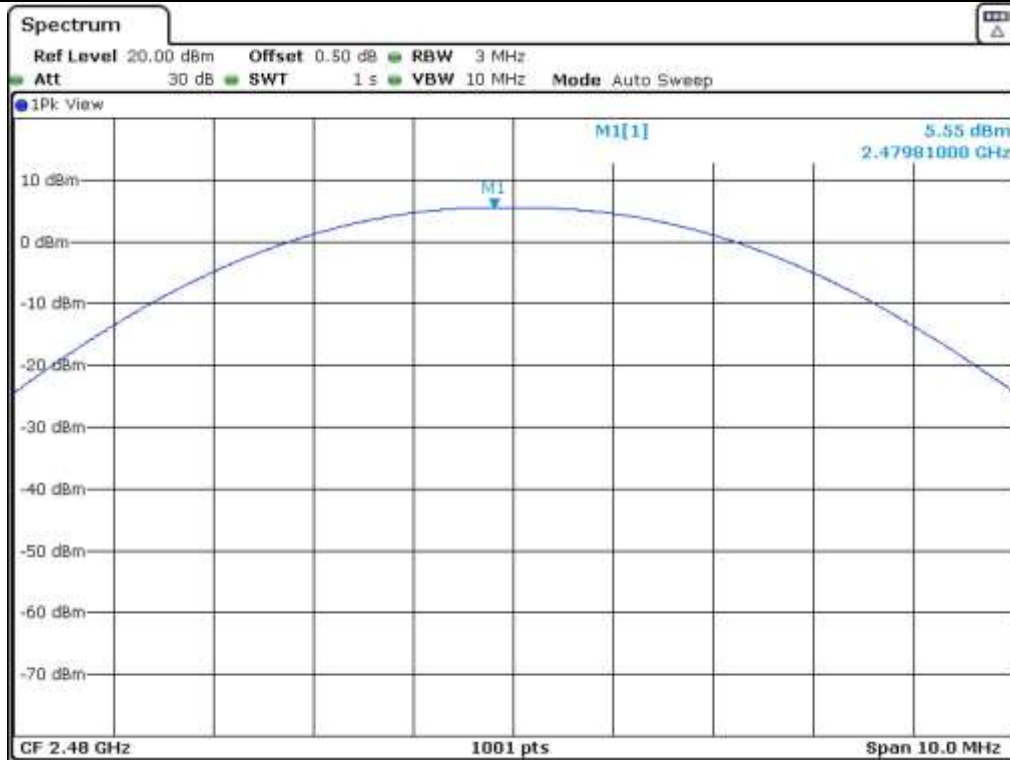

High Channel

### 11.5 Test data for 2 Mbps


- Test Date : September 04, 2015

- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	4.75	21.00	16.25
MIDDLE	2 441	5.15	21.00	15.85
HIGH	2 480	3.99	21.00	17.01

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


Tested by: Hyung-Kwon, Oh / Engineer

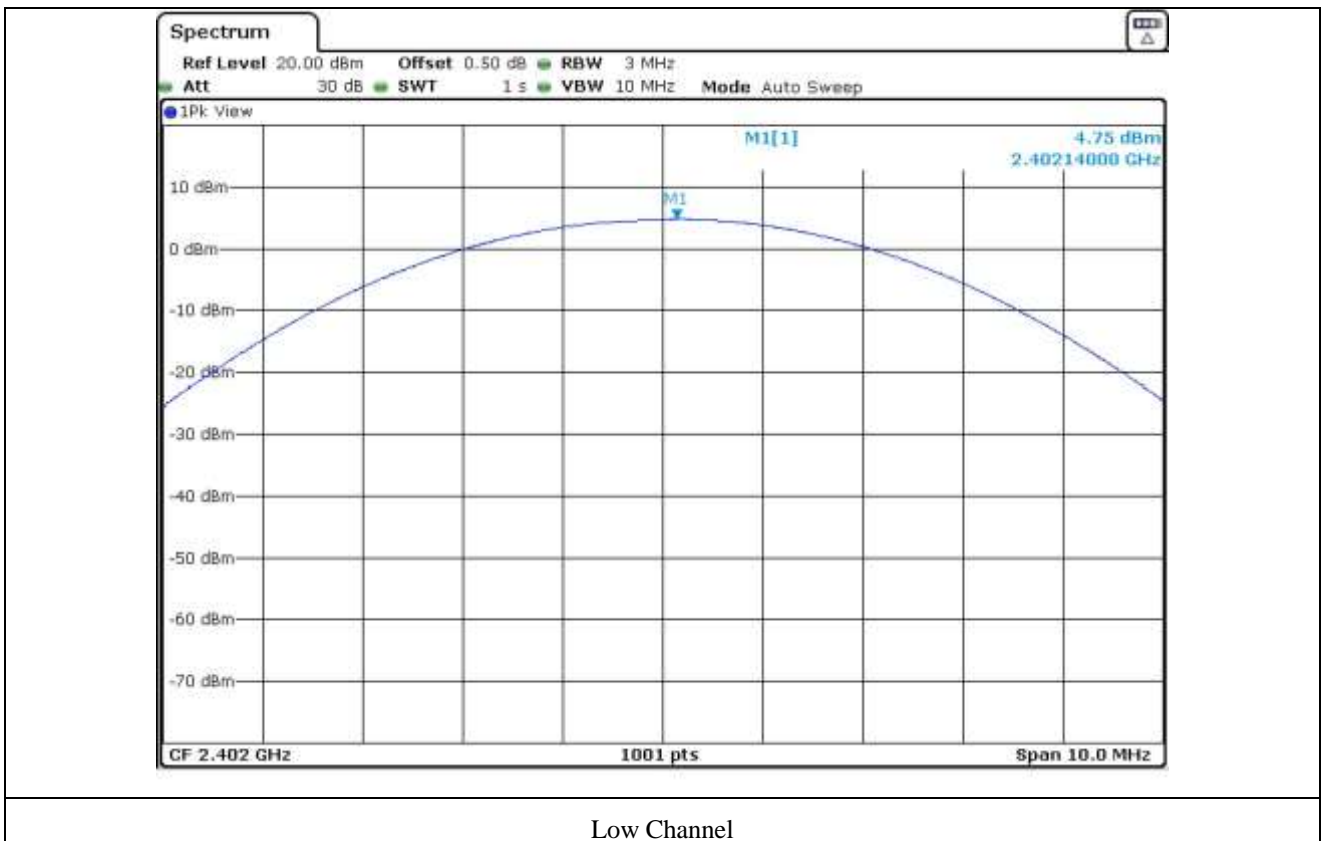

Low Channel

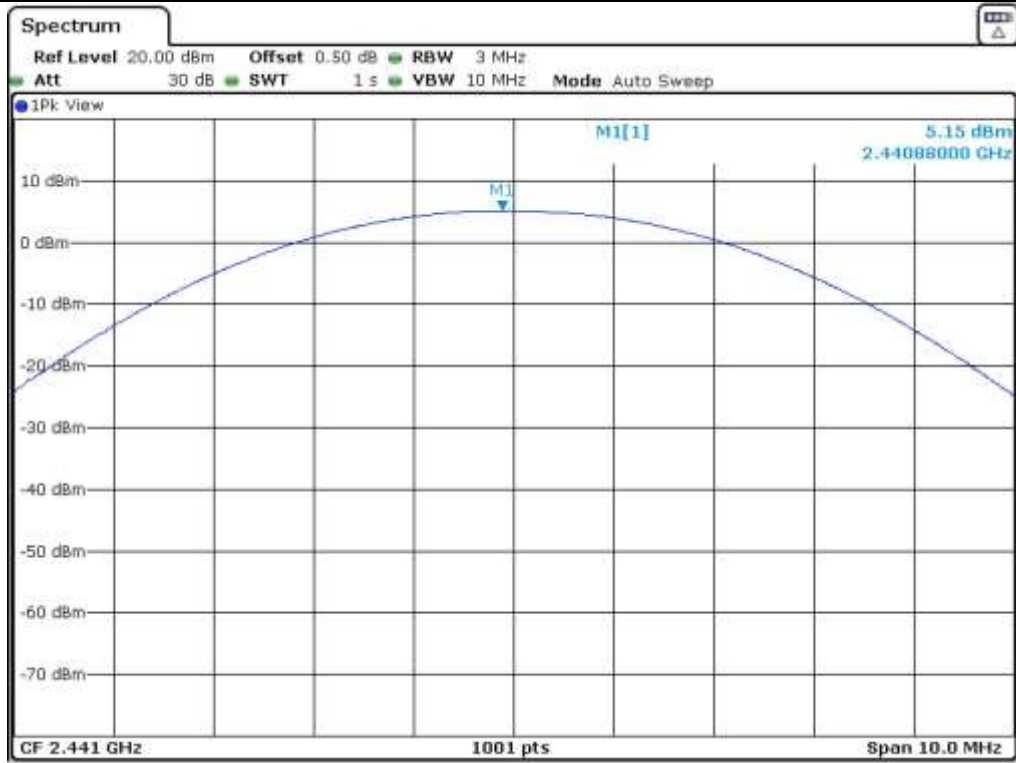

Middle Channel

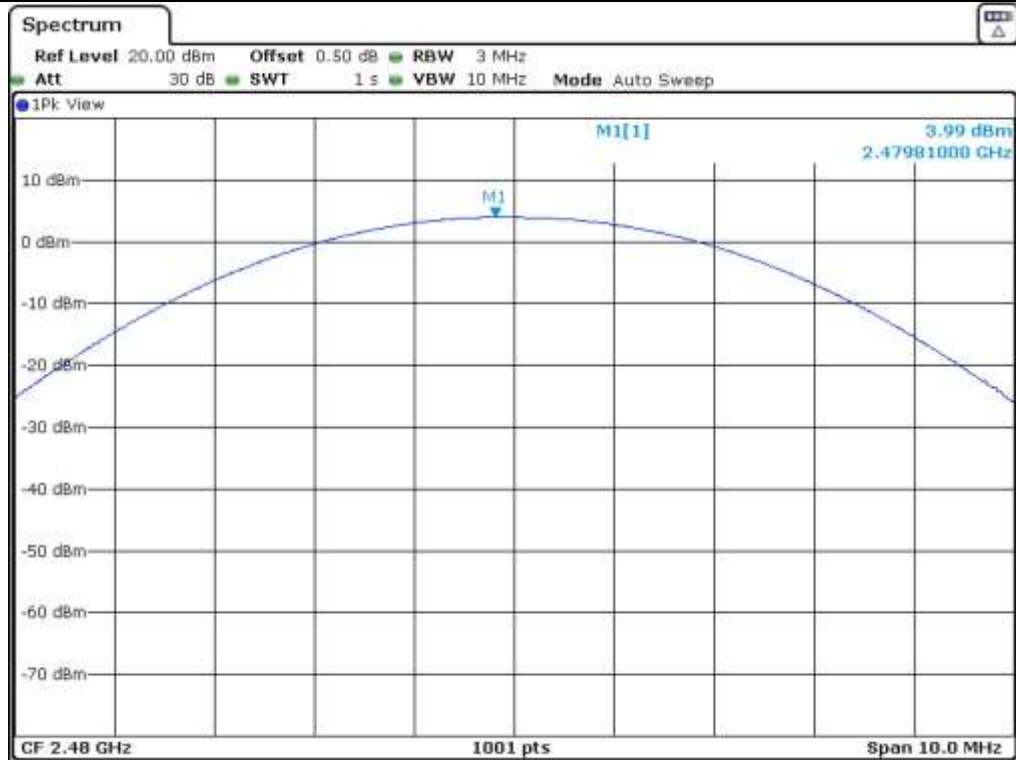

High Channel

### 11.6 Test data for 3 Mbps


- Test Date : September 04, 2015


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	4.90	21.00	16.10
MIDDLE	2 441	5.43	21.00	15.57
HIGH	2 480	4.29	21.00	16.71


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Hyung-Kwon, Oh / Engineer

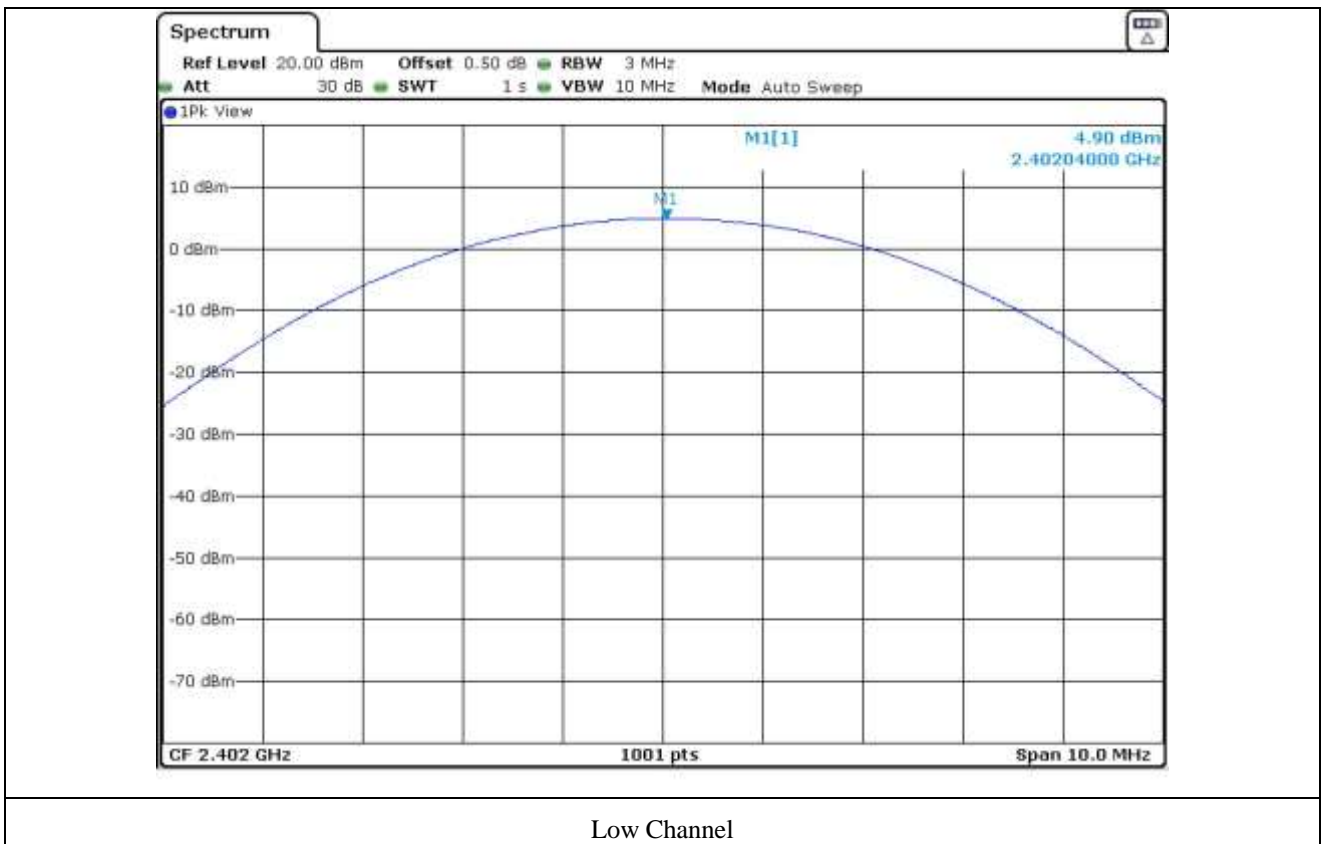

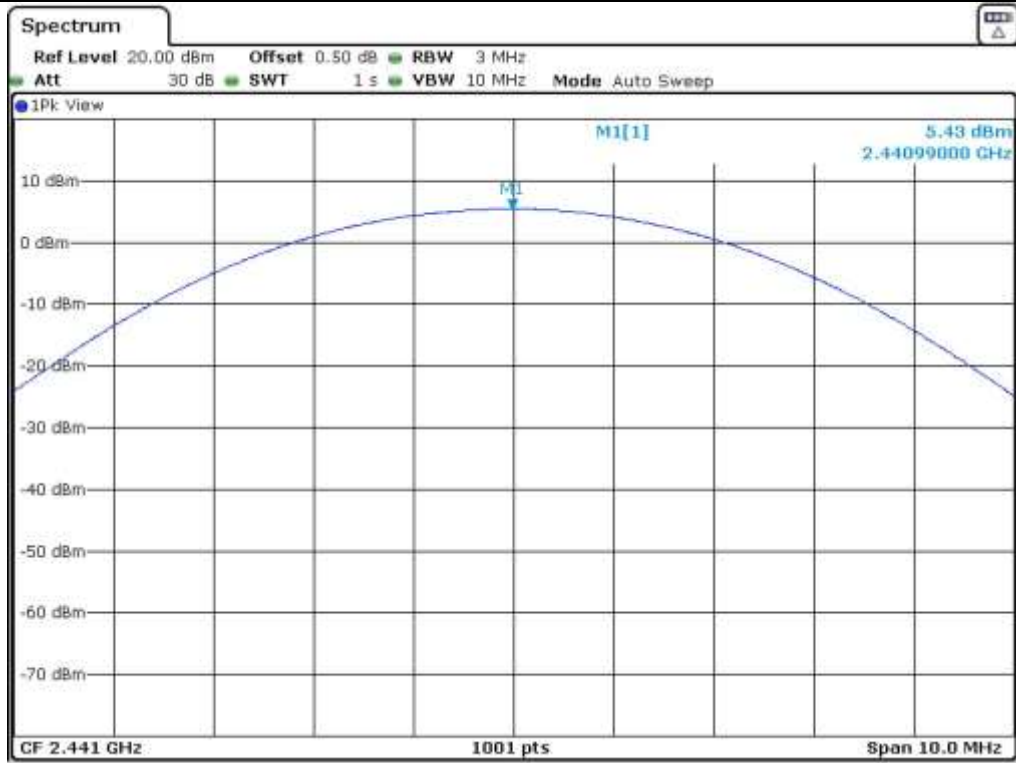

Middle Channel

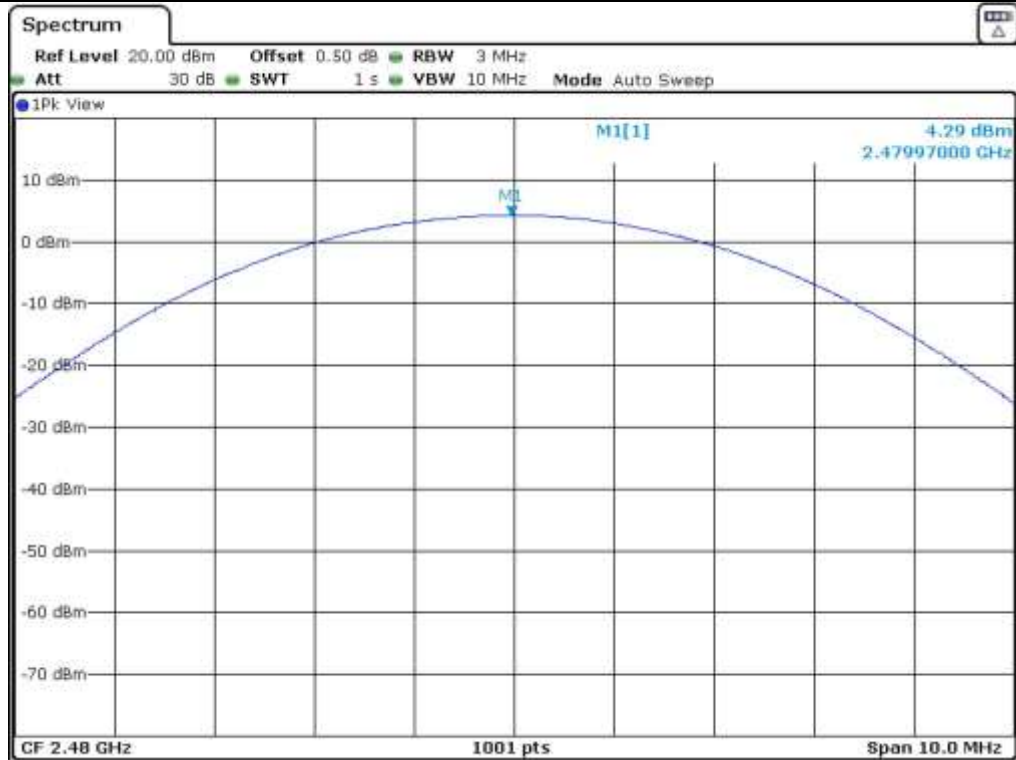

High Channel



## 12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

### 12.1 Operating environment

Temperature : 21.4 °C  
 Relative humidity : 45.1 % R.H

### 12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.



### 12.3 Test set-up for radiated measurement

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 kHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 ms in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


### 12.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)
■ -	ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 29, 2015 (1Y)
■ -	310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 29, 2015 (1Y)
■ -	SCU-18	Rohde & Schwarz	Pre-Amplifier	10041	Nov. 25, 2014 (1Y)
■ -	DT3000	Innco System	Turn Table	930611	N/A
■ -	MA4000-EP	Innco System	Antenna Master	3320611	N/A
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Jul. 10, 2014 (2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Apr. 30, 2015 (2Y)


All test equipment used is calibrated on a regular basis.

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

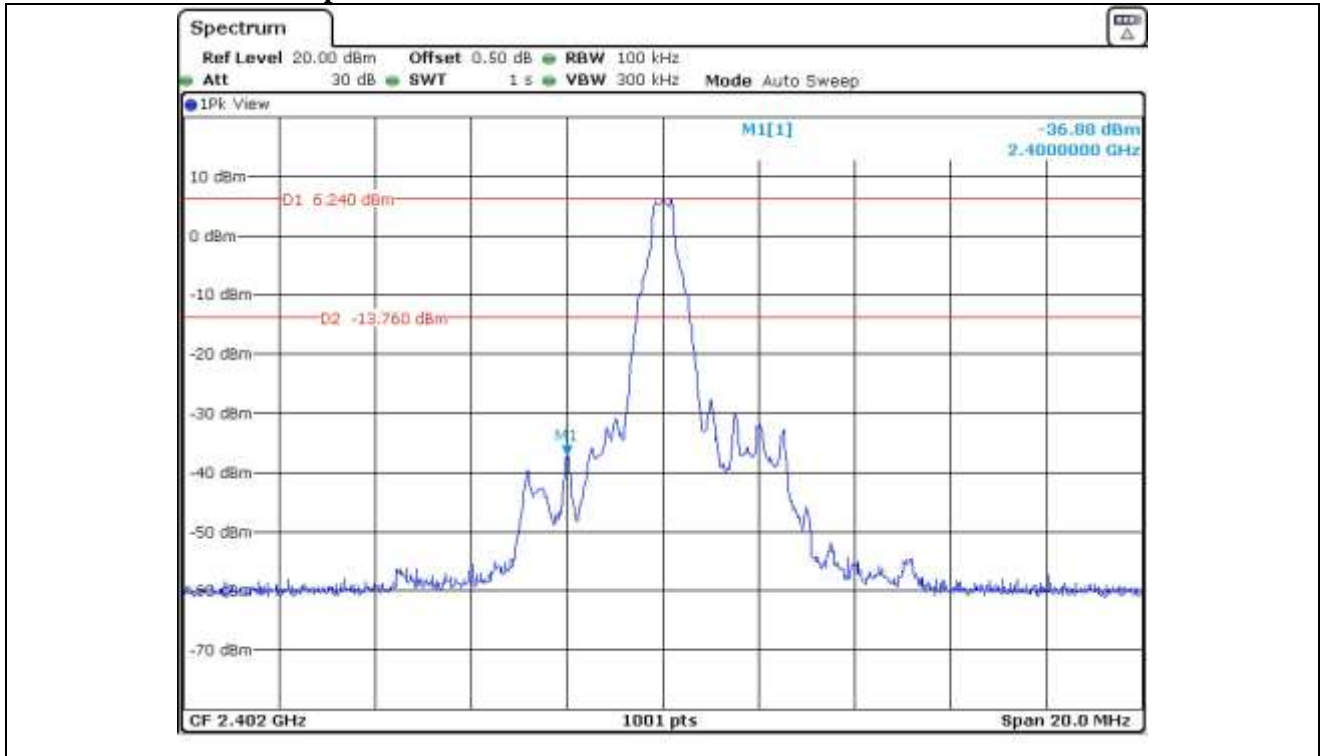


Low Channel

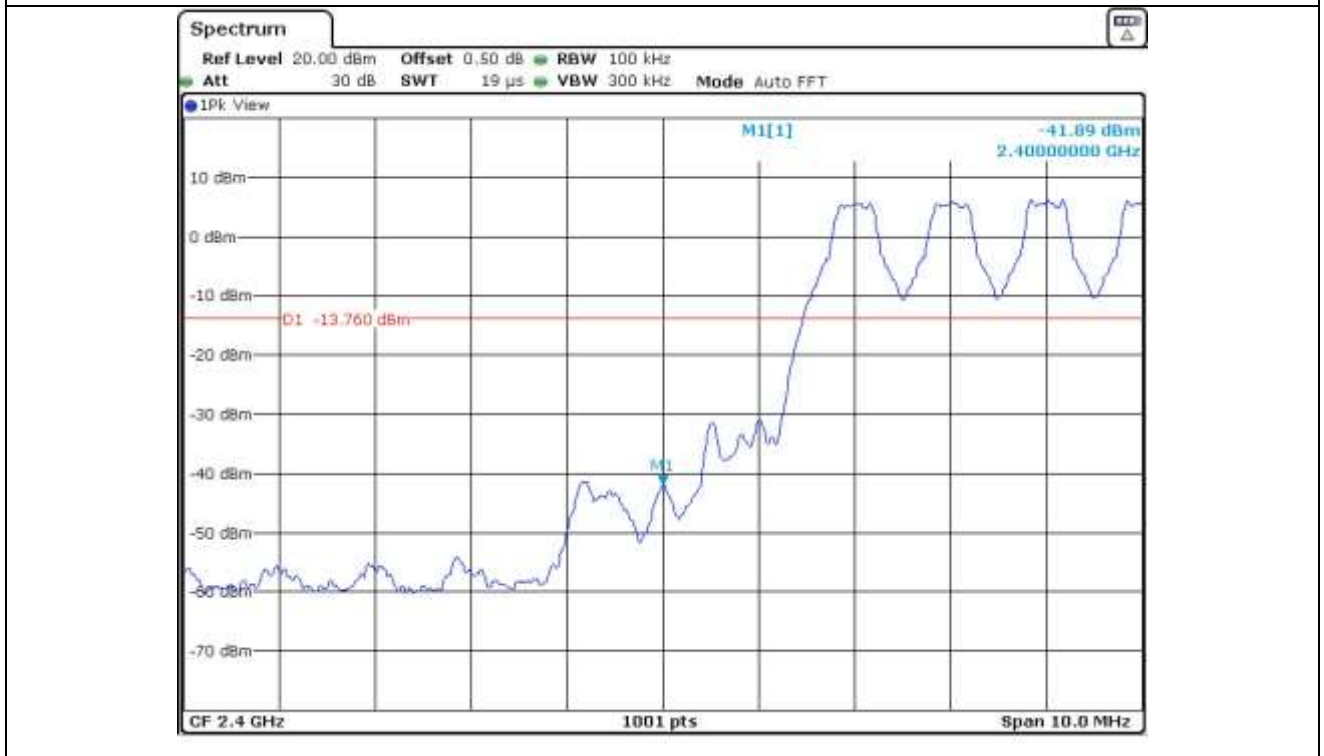


Low Channel

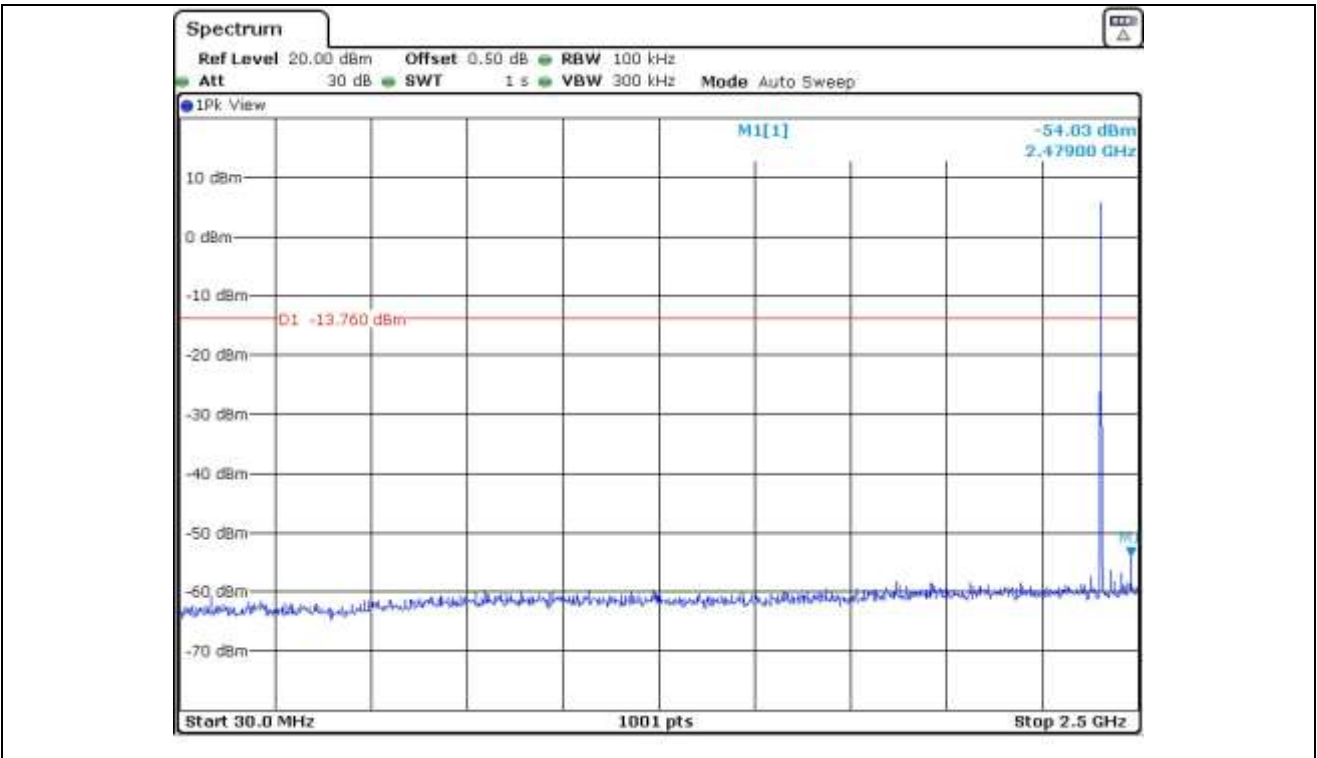


Low Channel

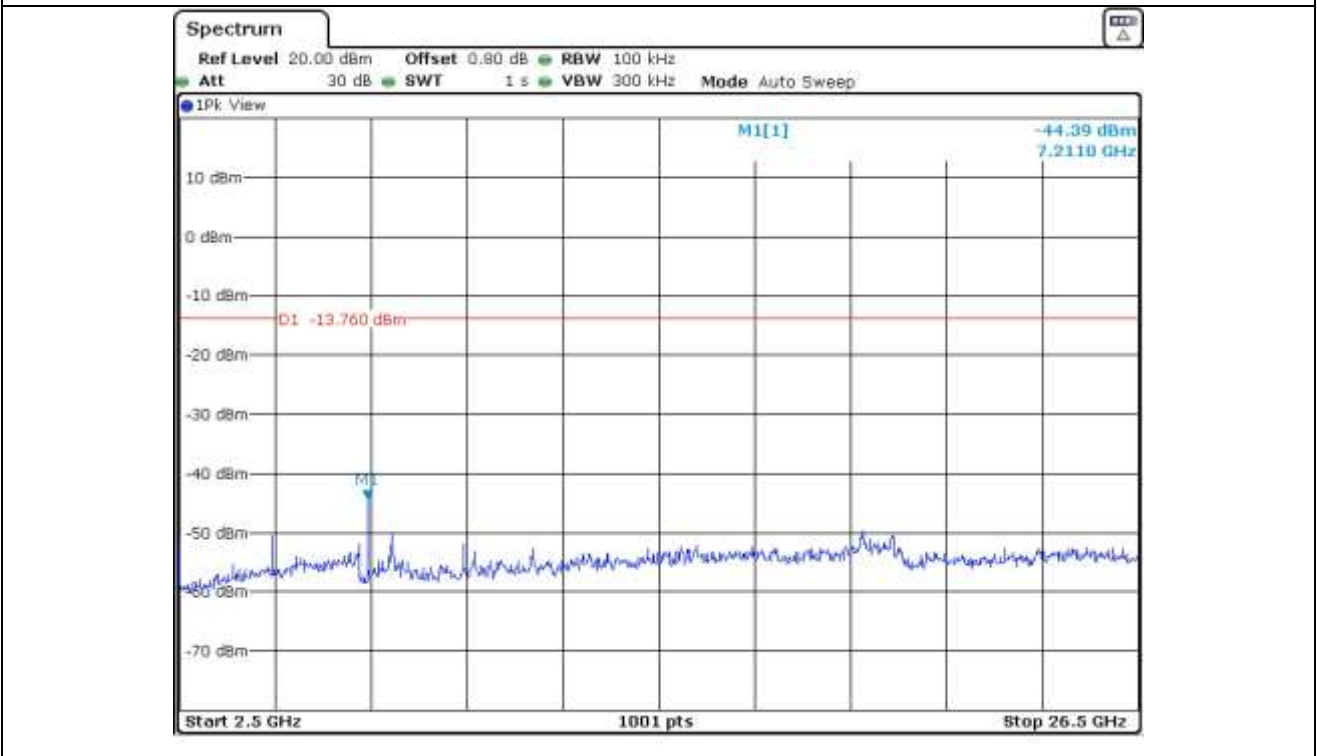


Low Channel

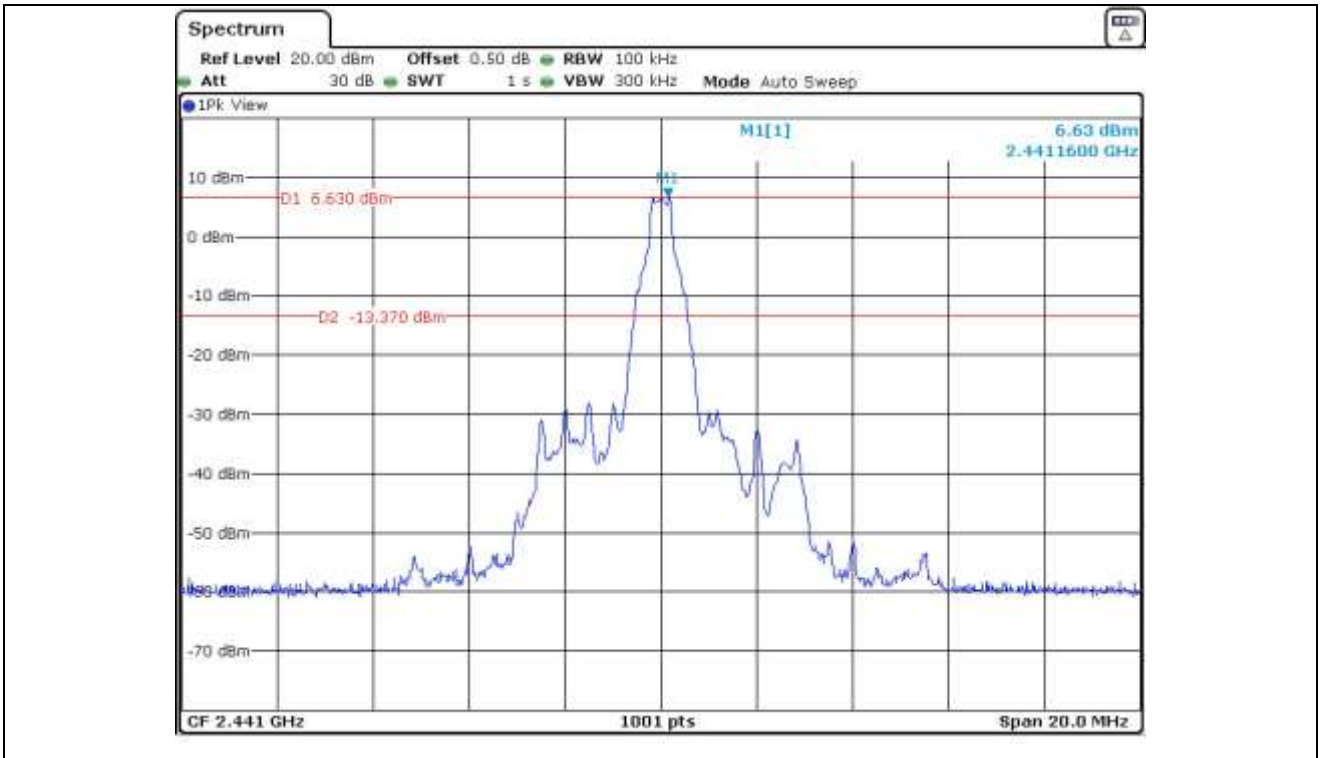


Middle Channel

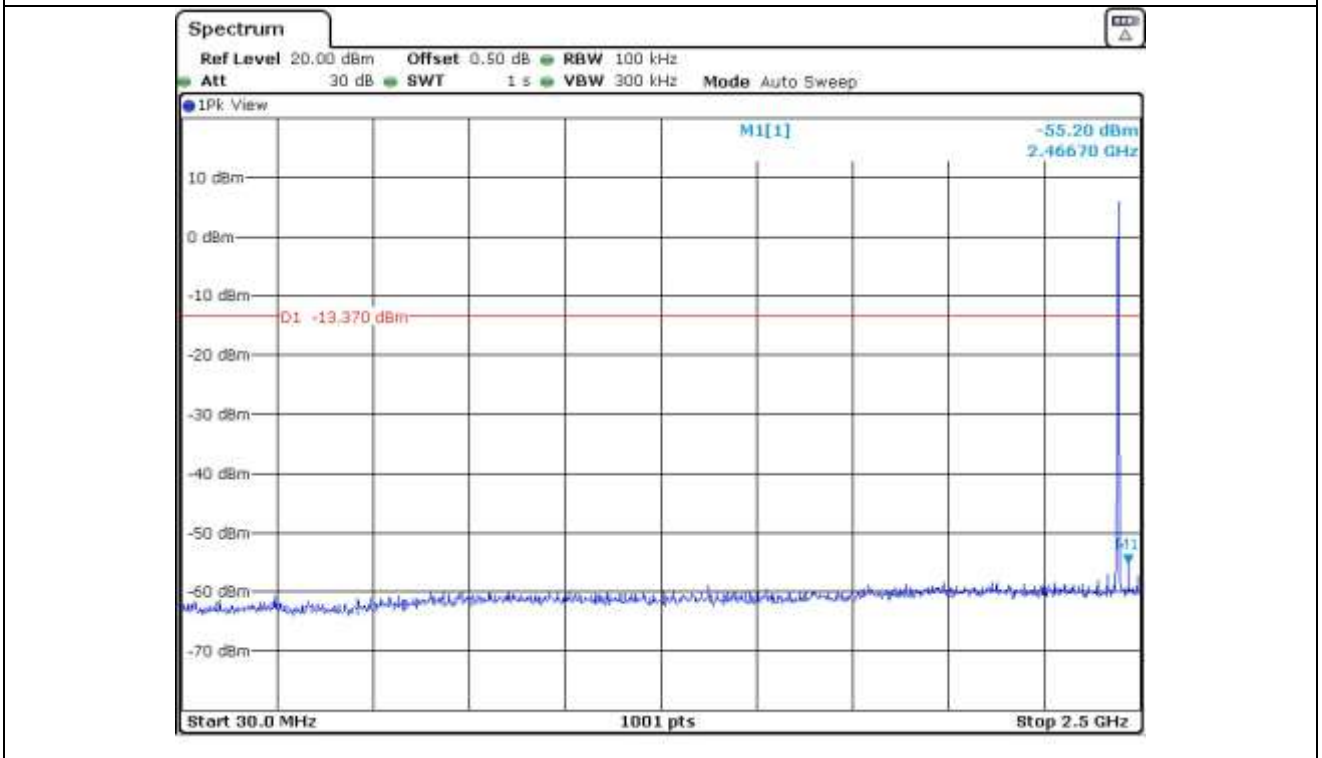


Middle Channel

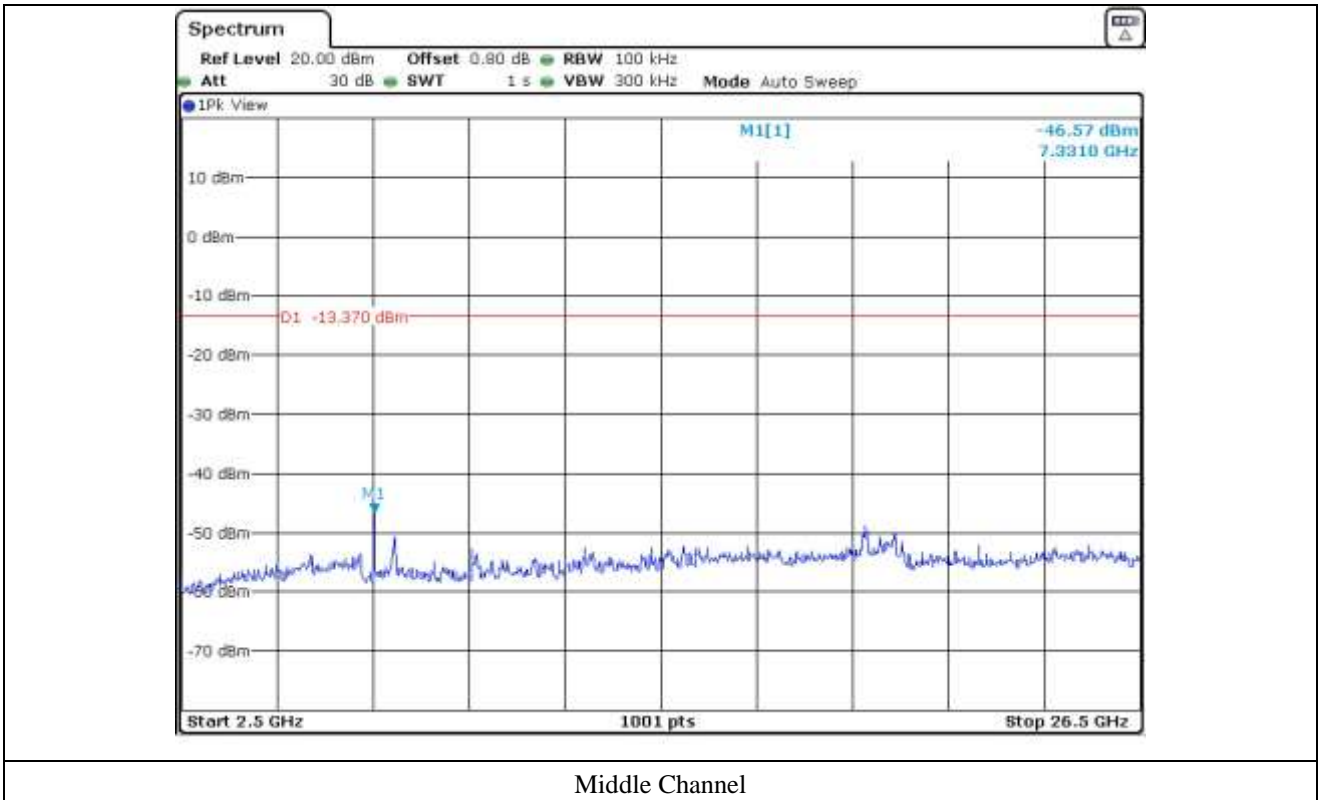


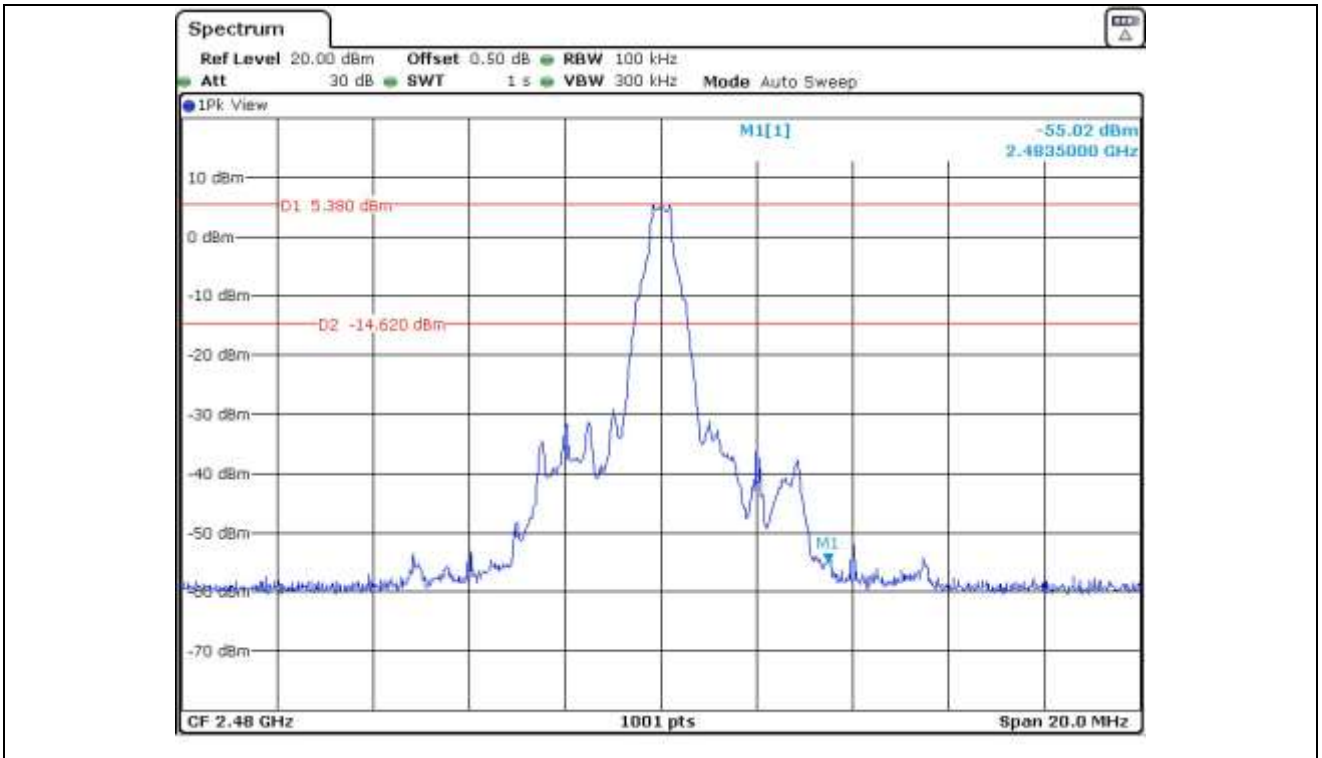


High Channel

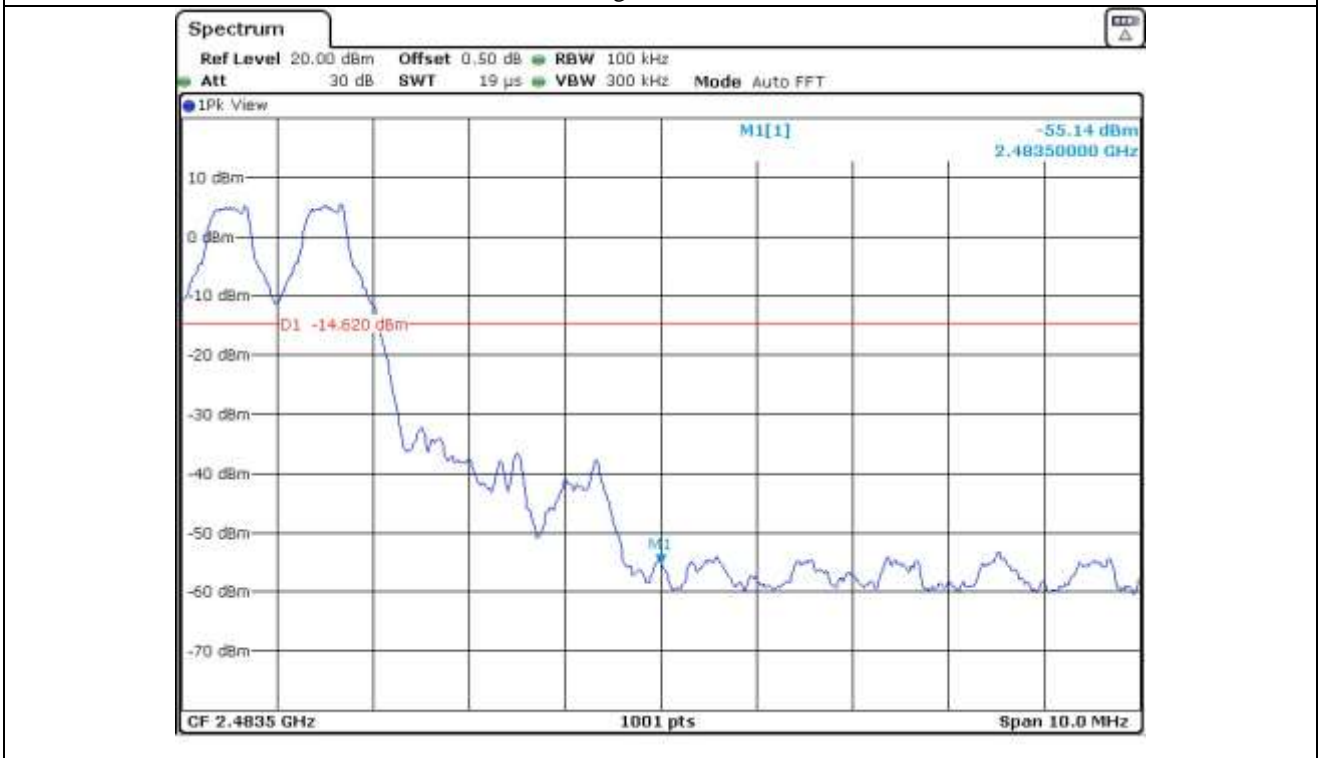

High Channel

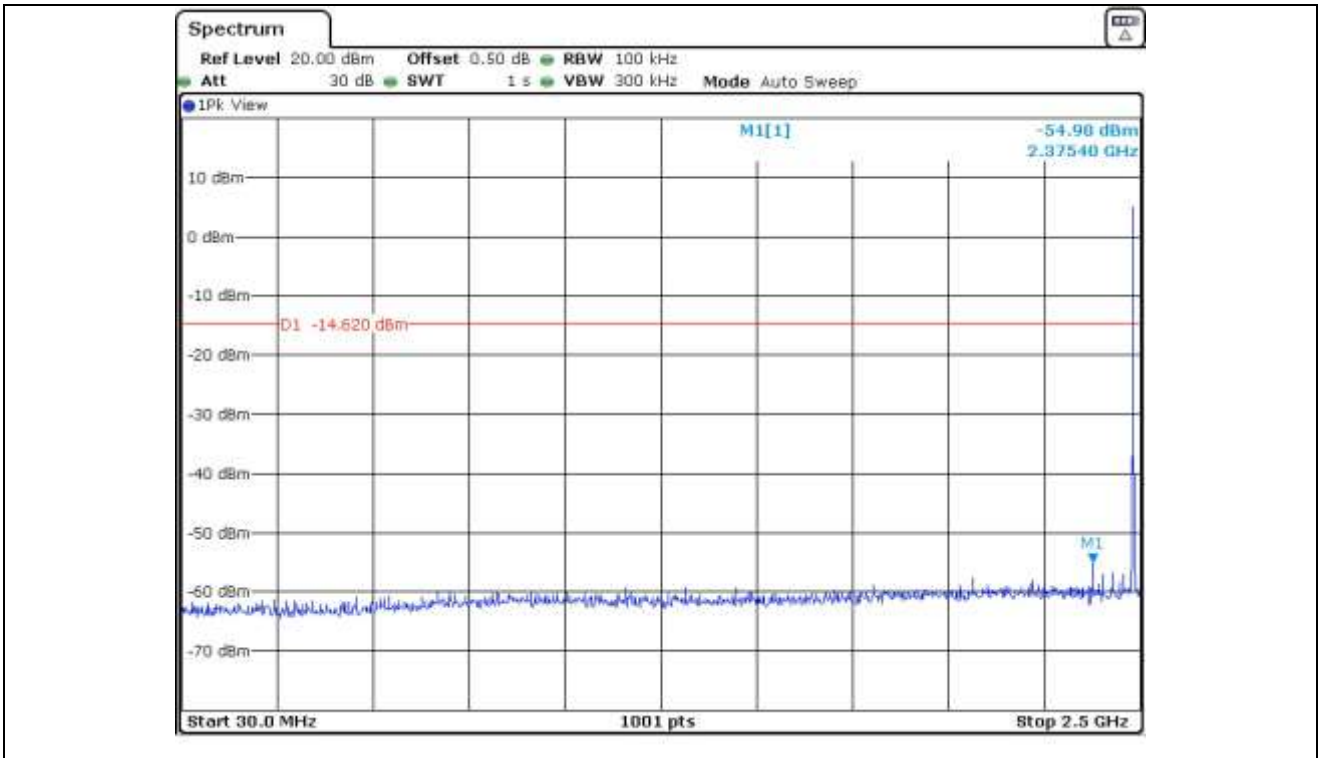


High Channel

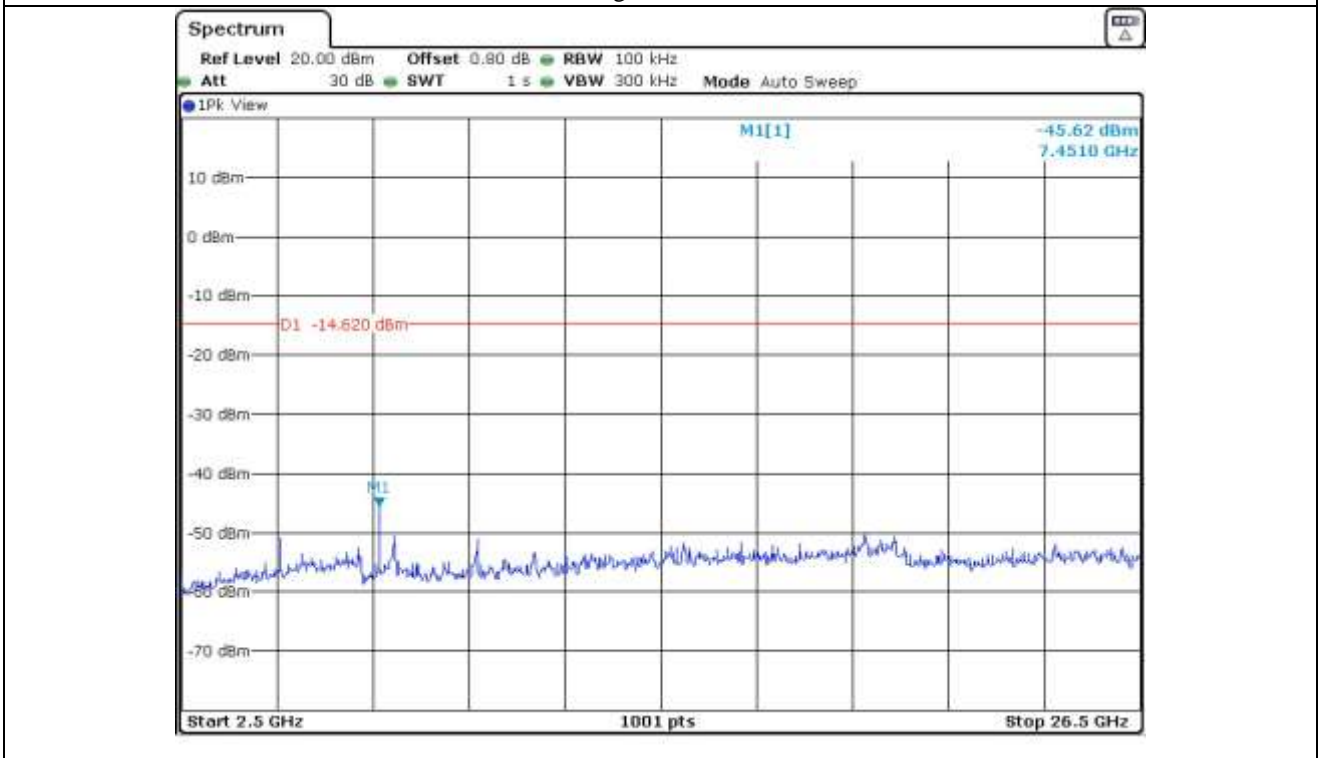


High Channel



12.5.2 Test data for 2 Mbps

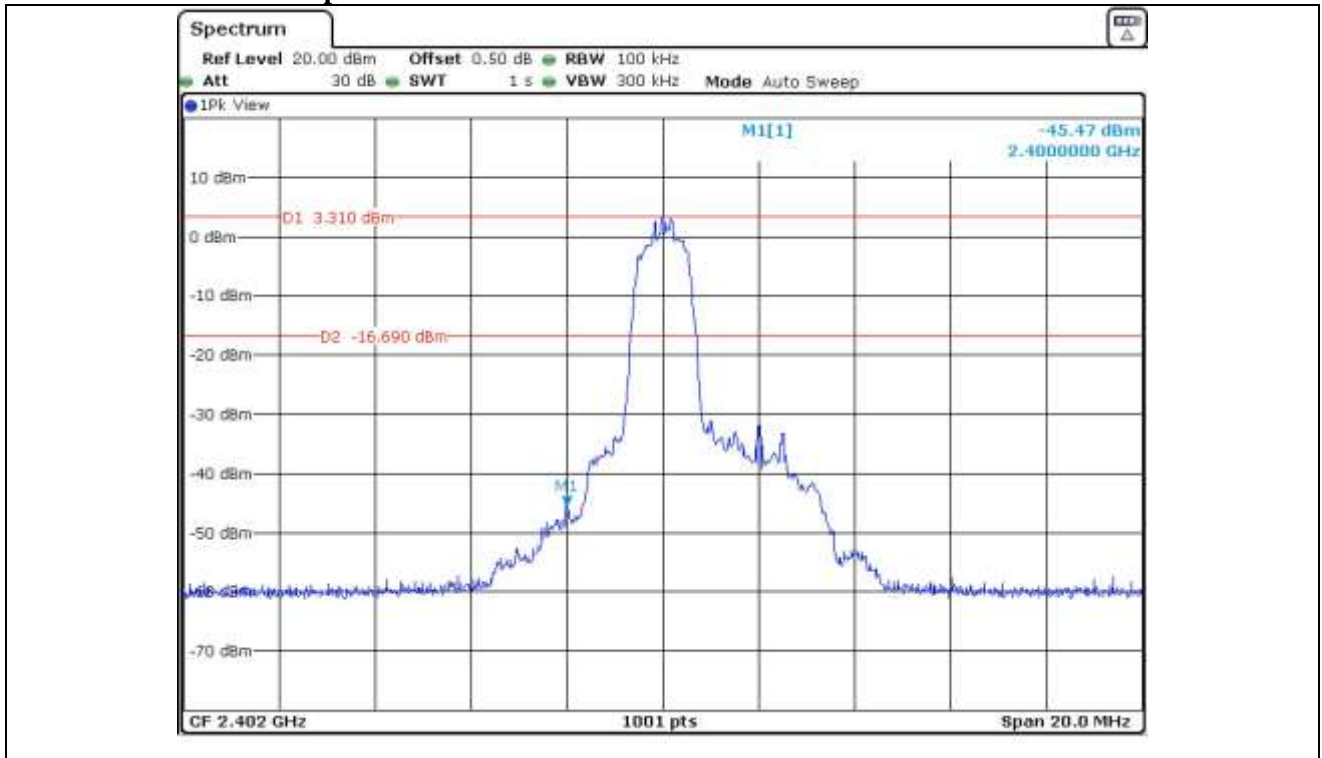


Low Channel

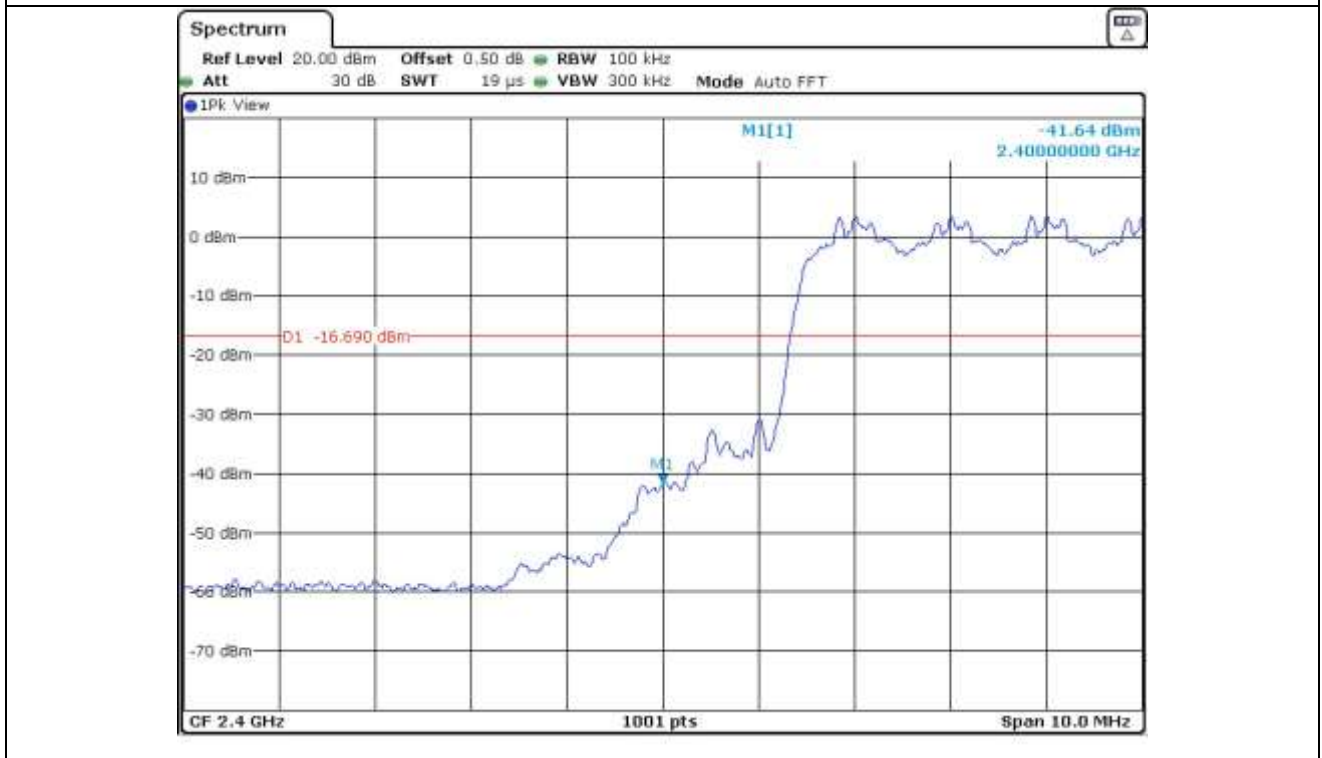


Low Channel




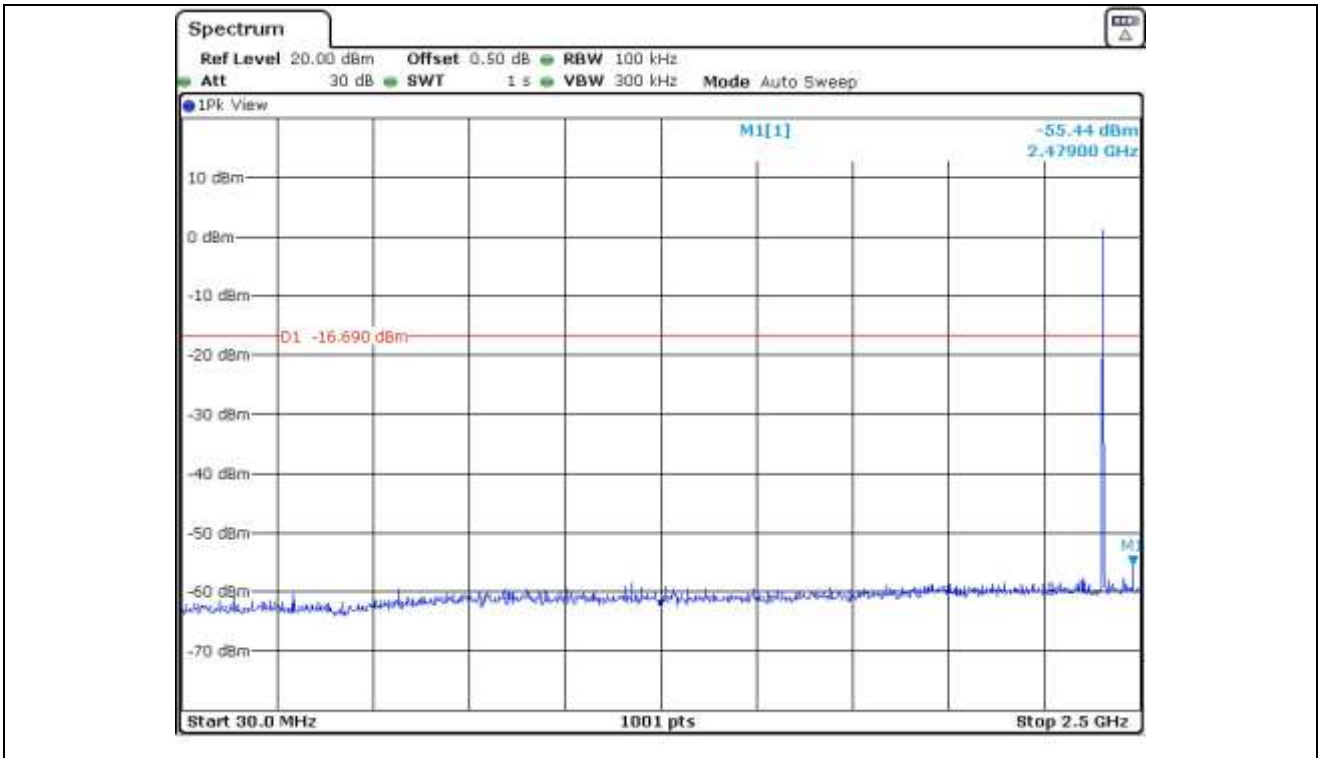


Low Channel

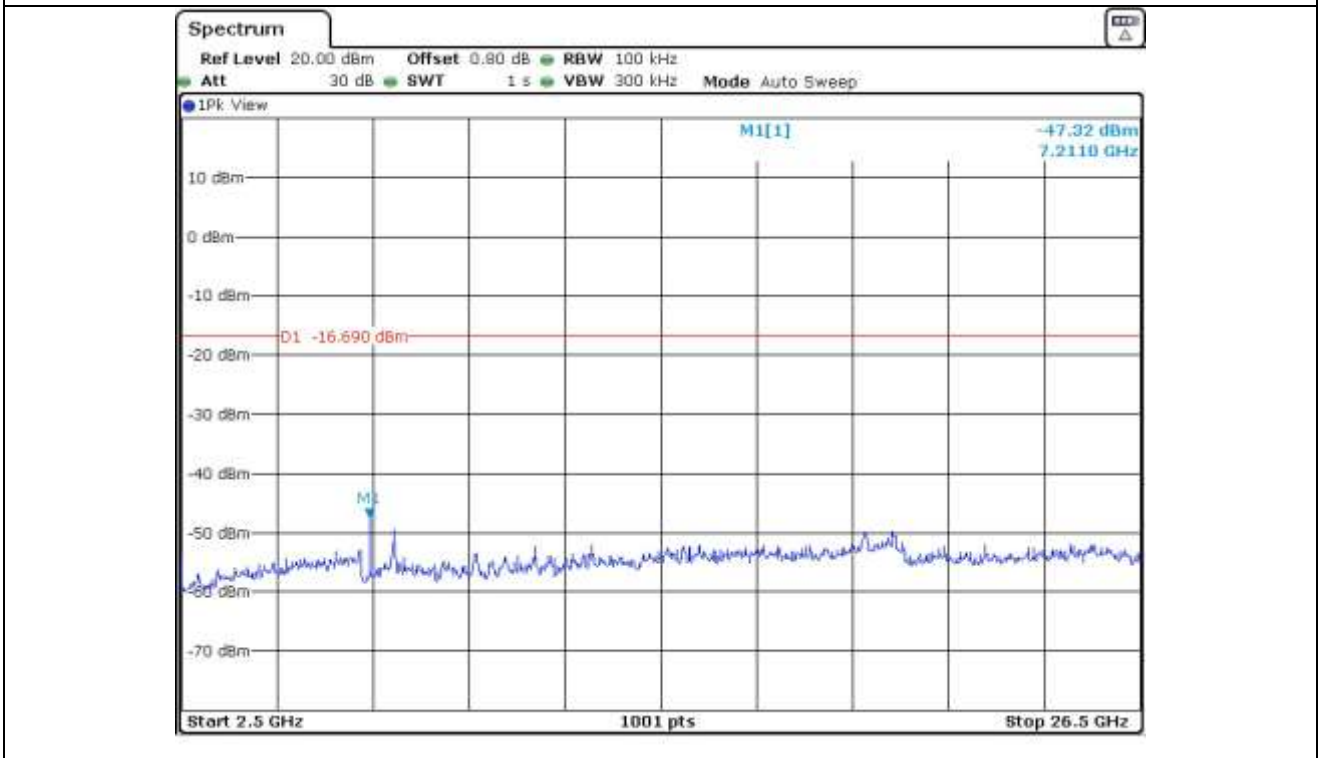


Low Channel

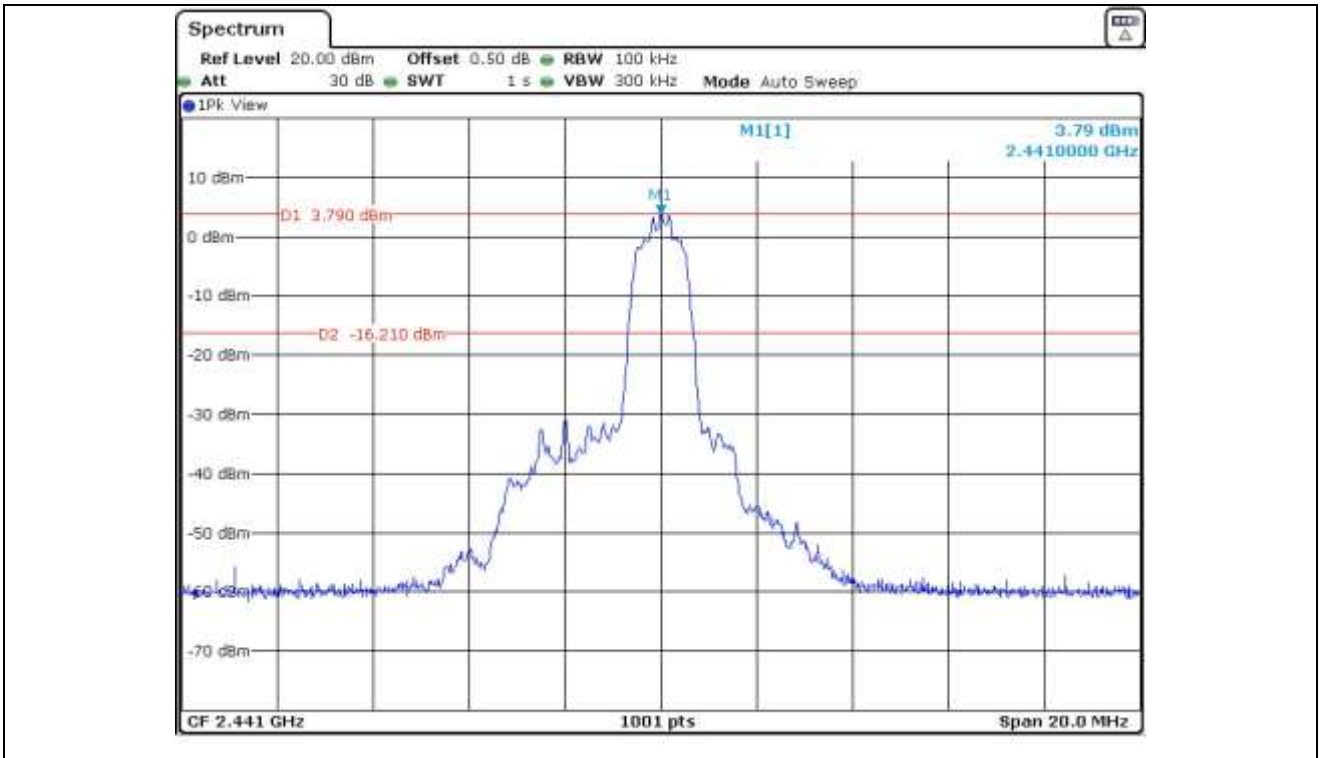


Middle Channel

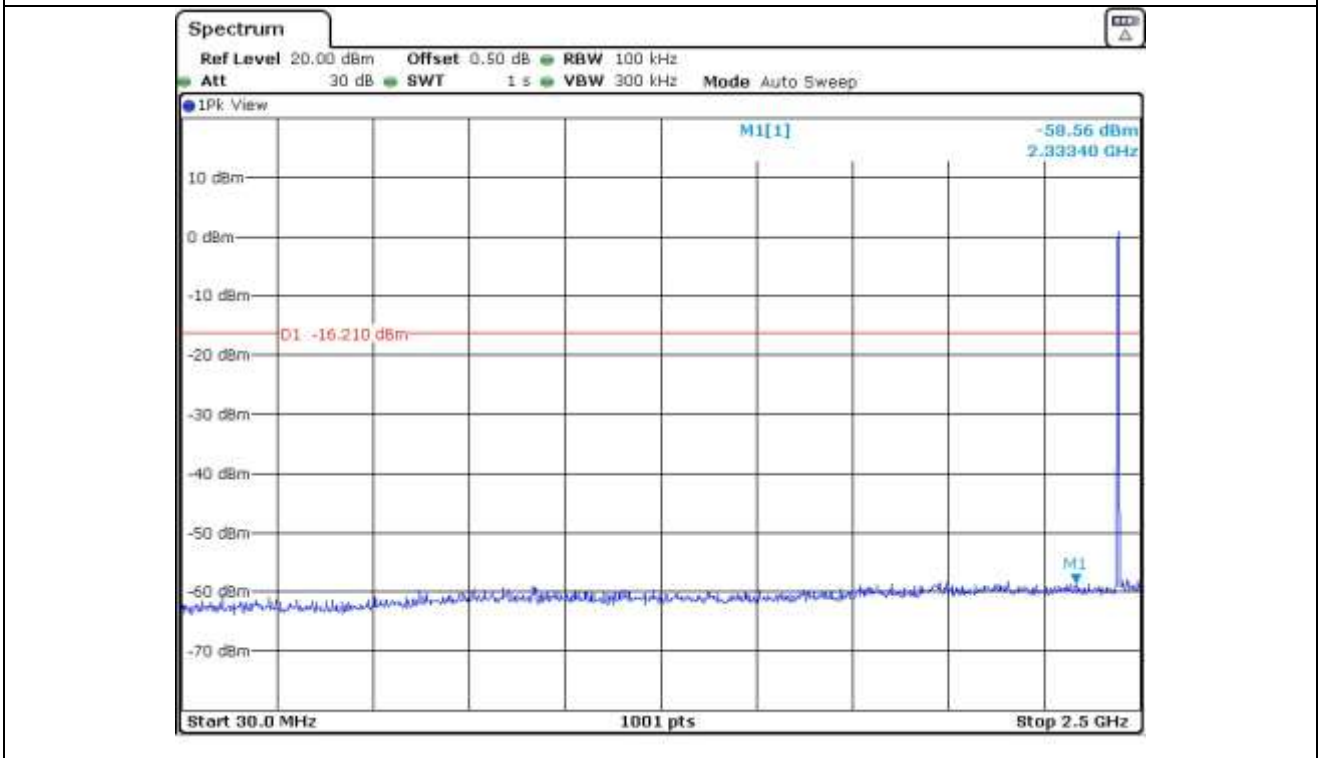


Middle Channel

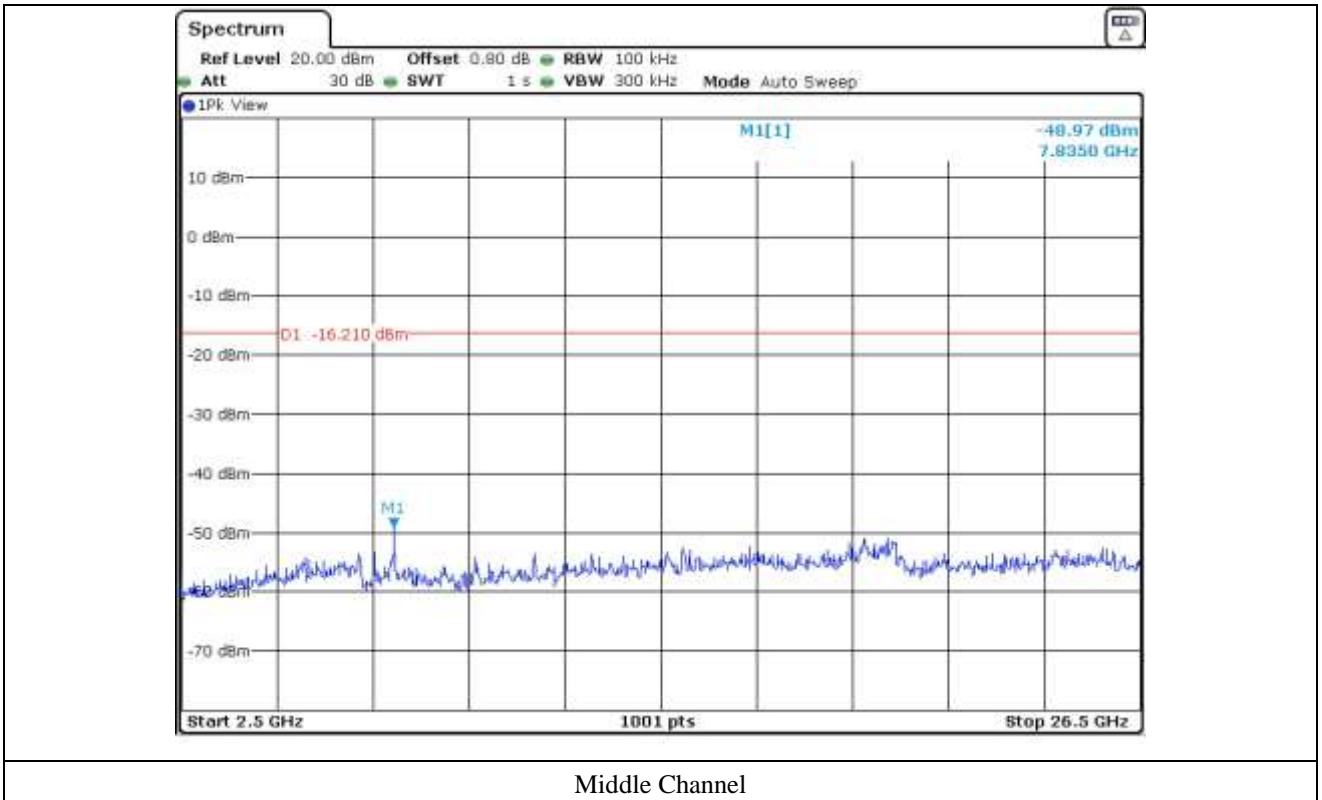


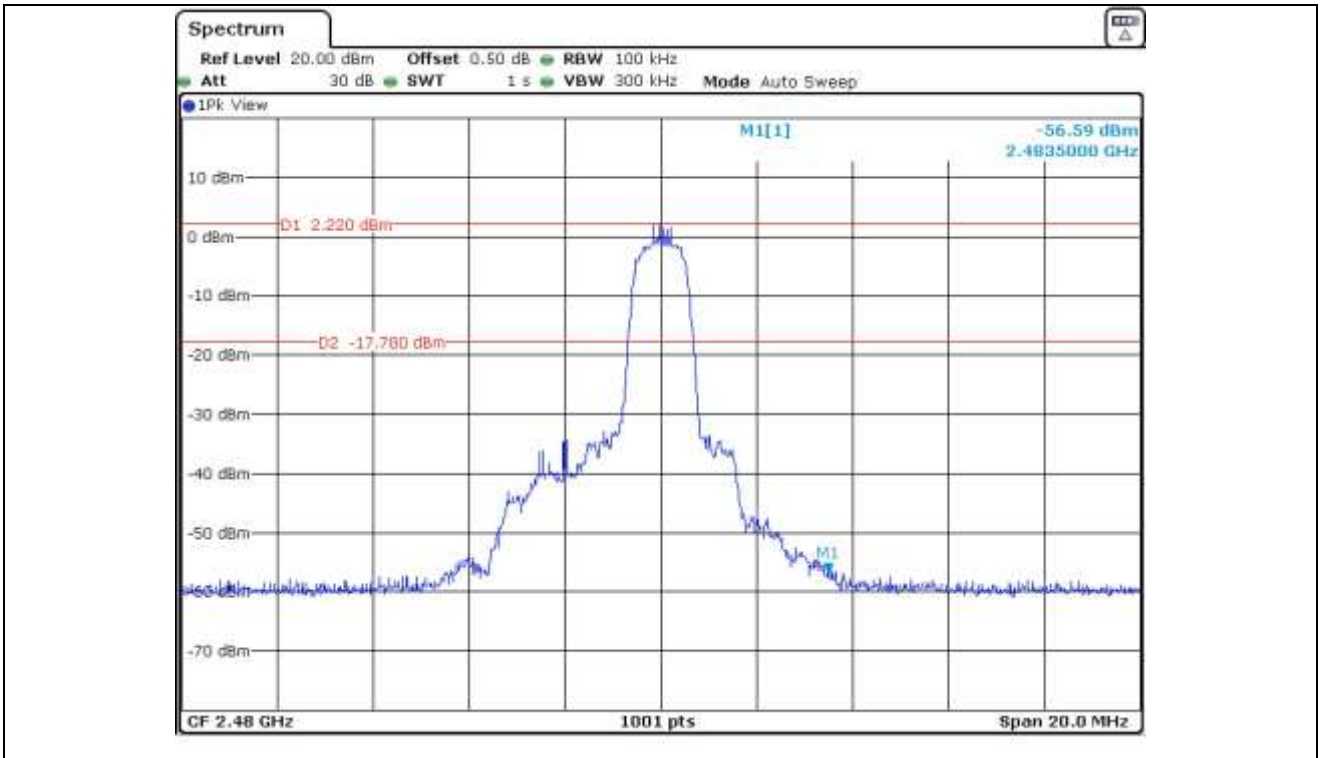


High Channel

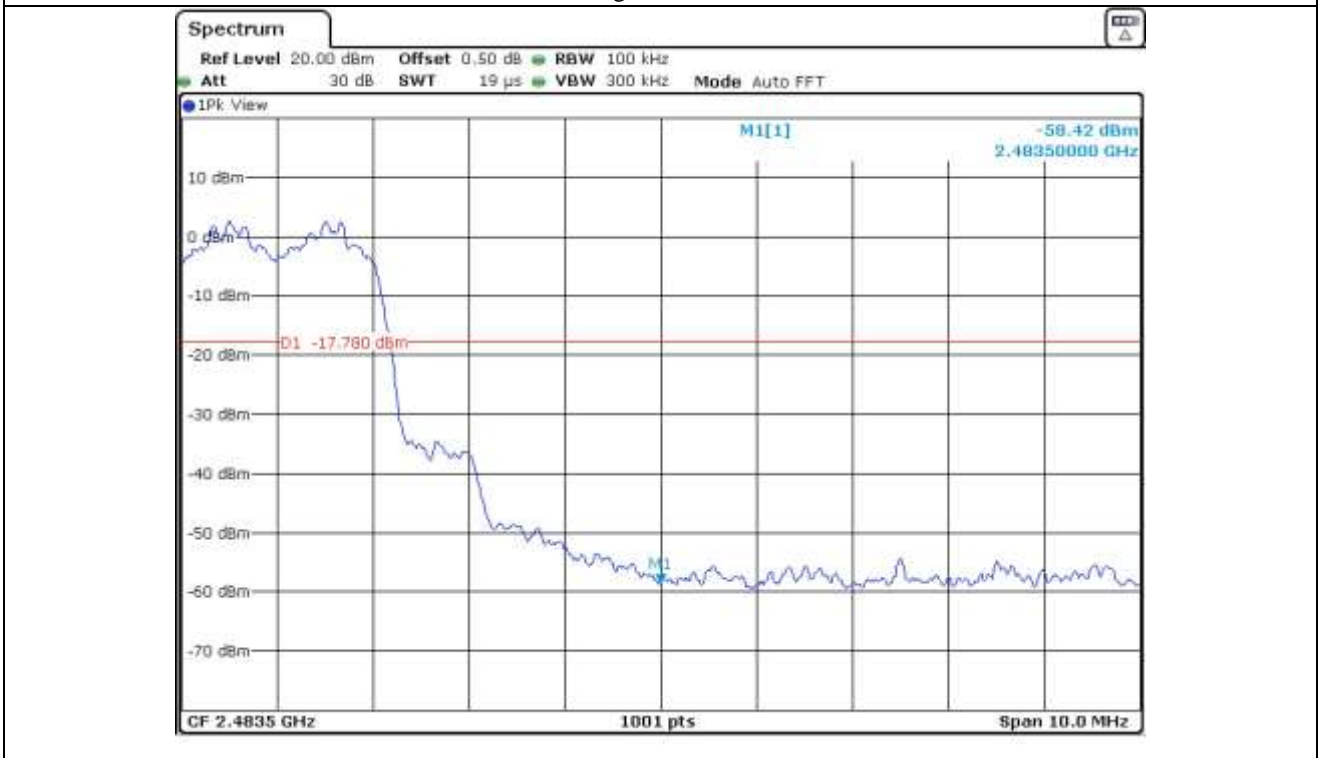

High Channel

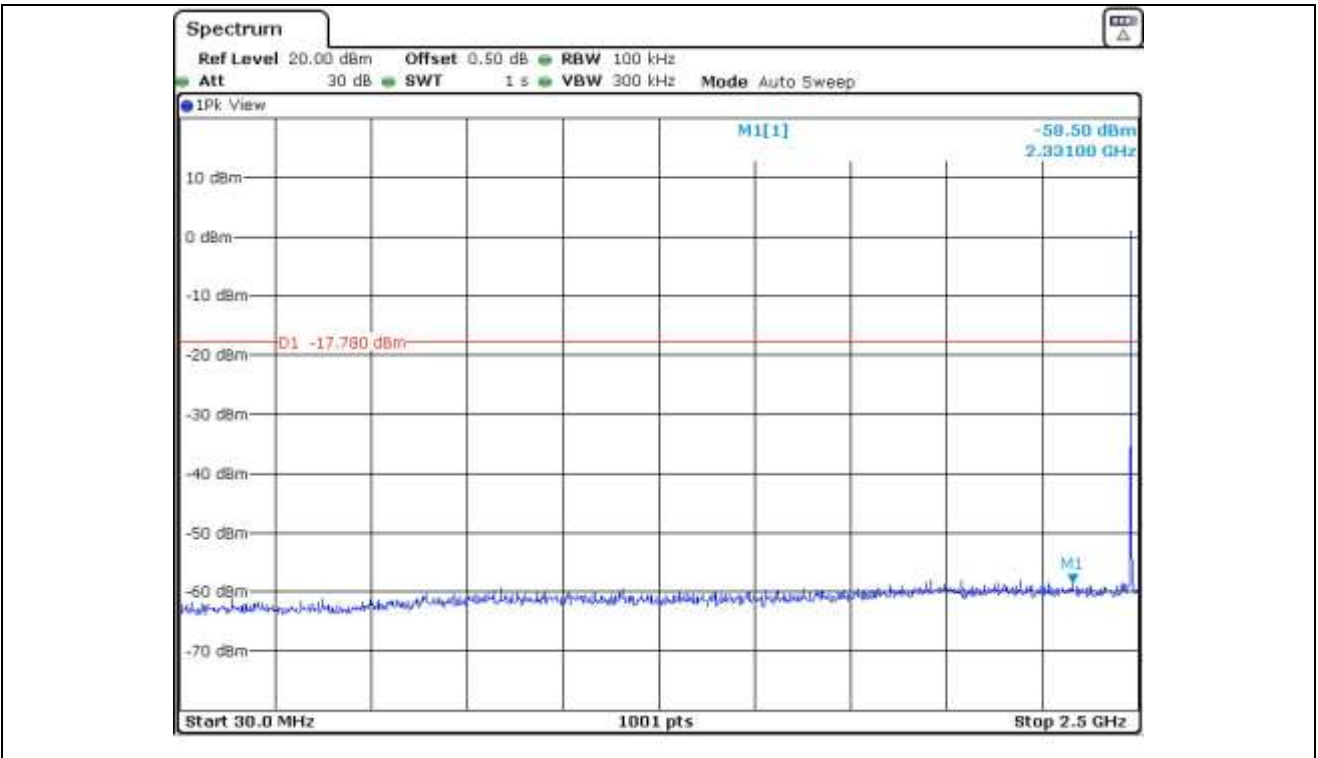


High Channel

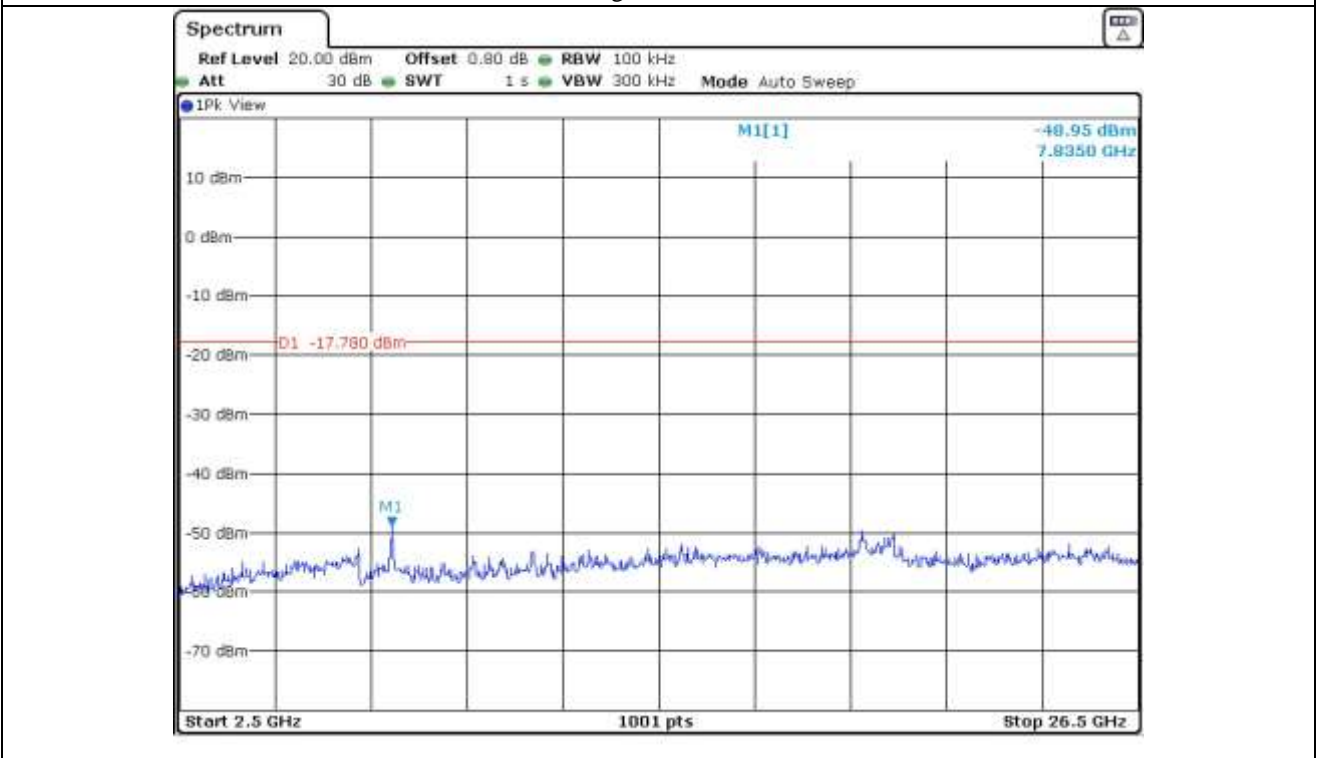


High Channel


12.5.3 Test data for 3 Mbps

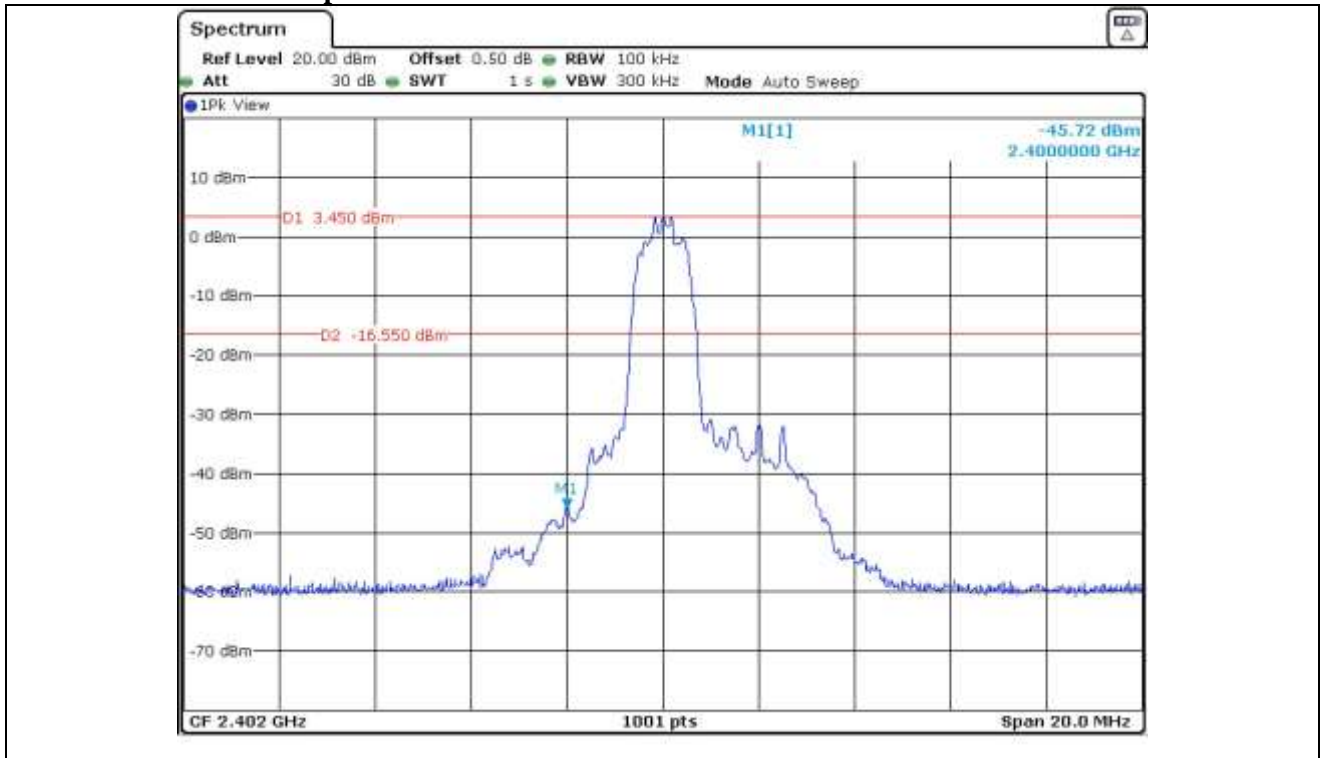


Low Channel

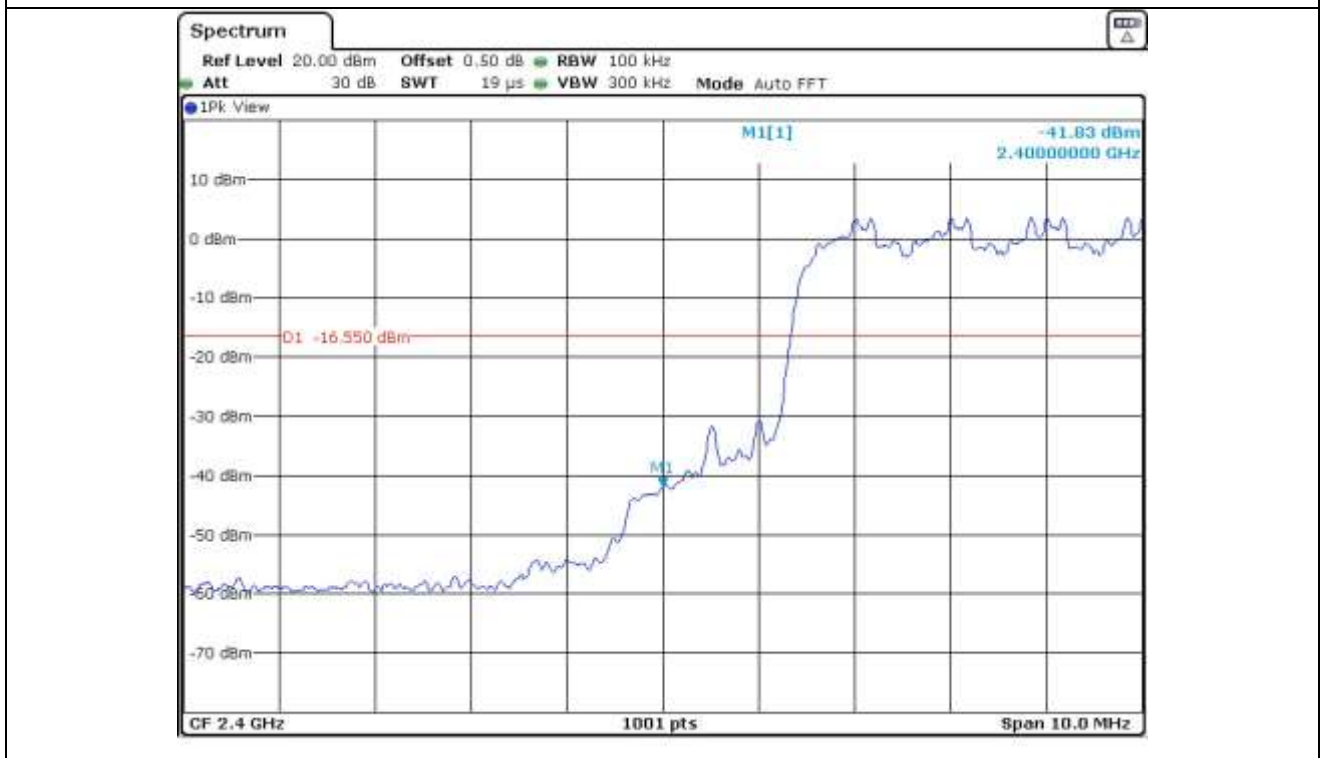

Low Channel

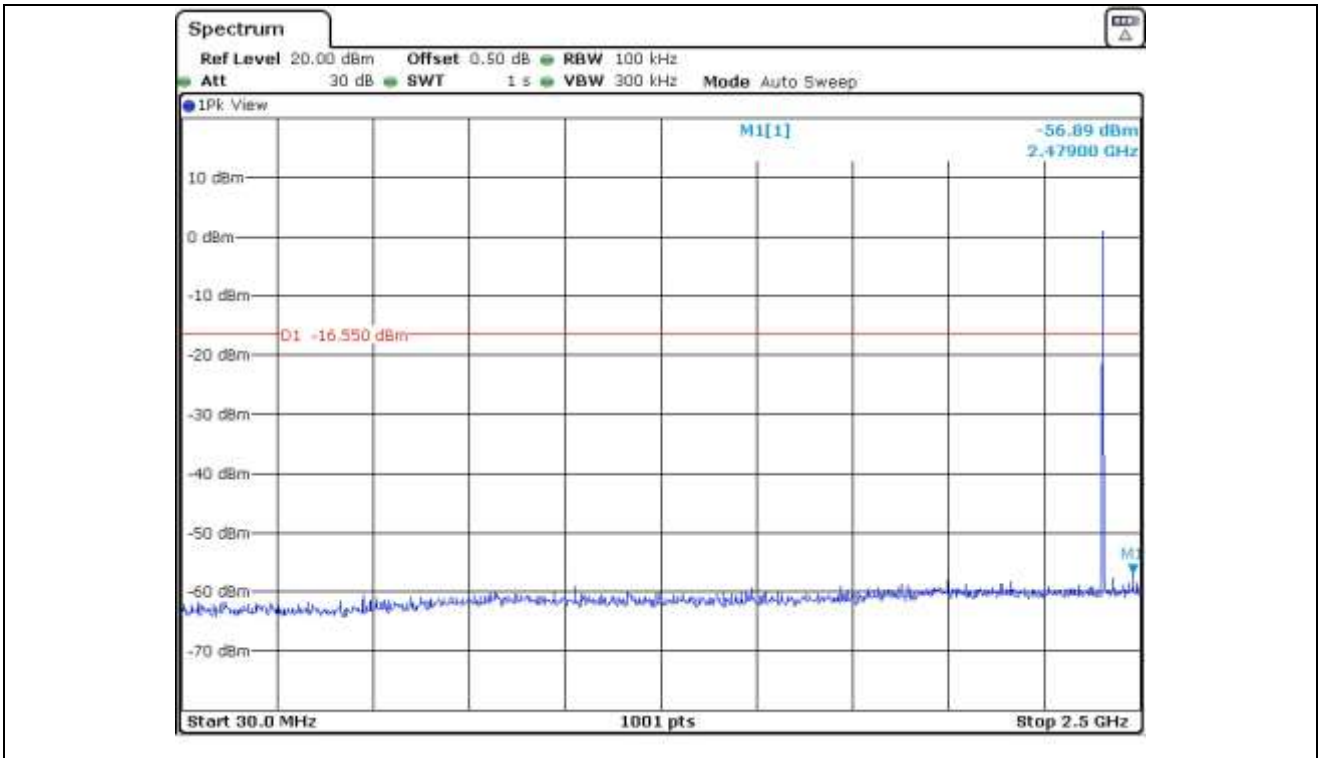


Low Channel

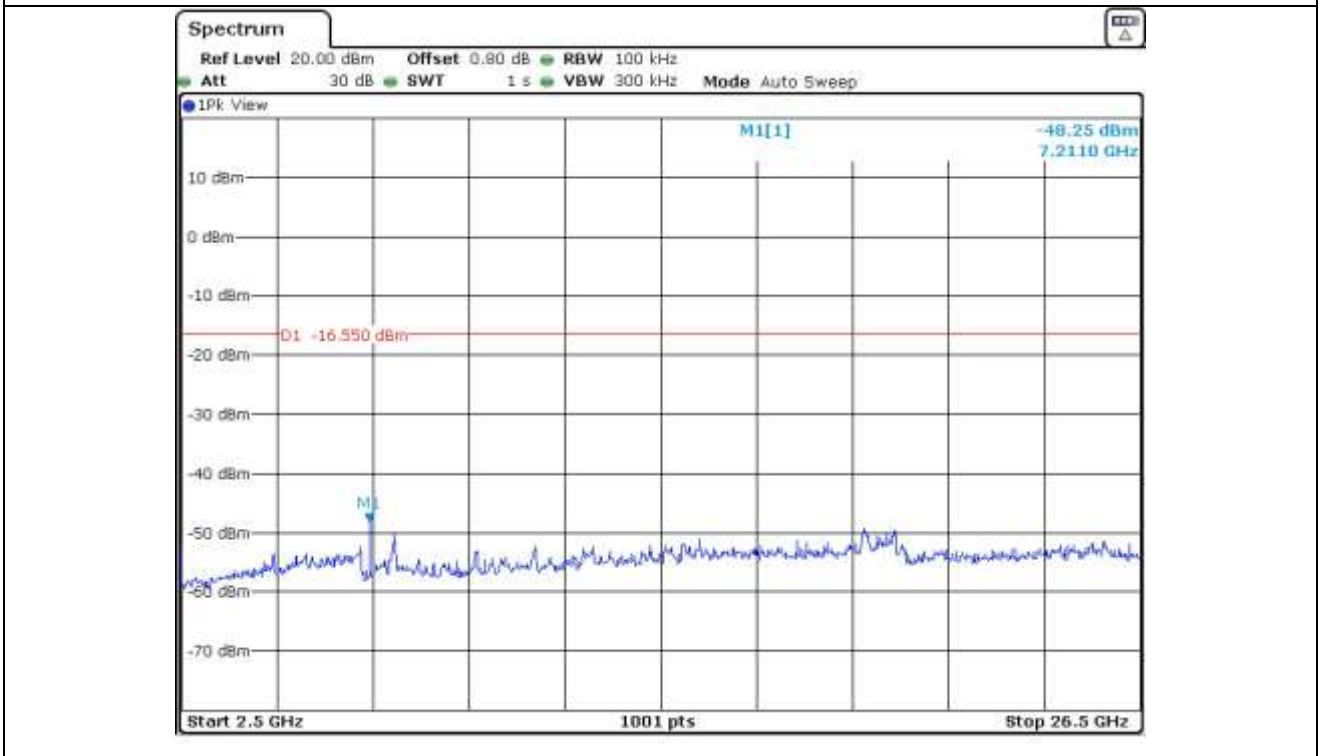


Low Channel



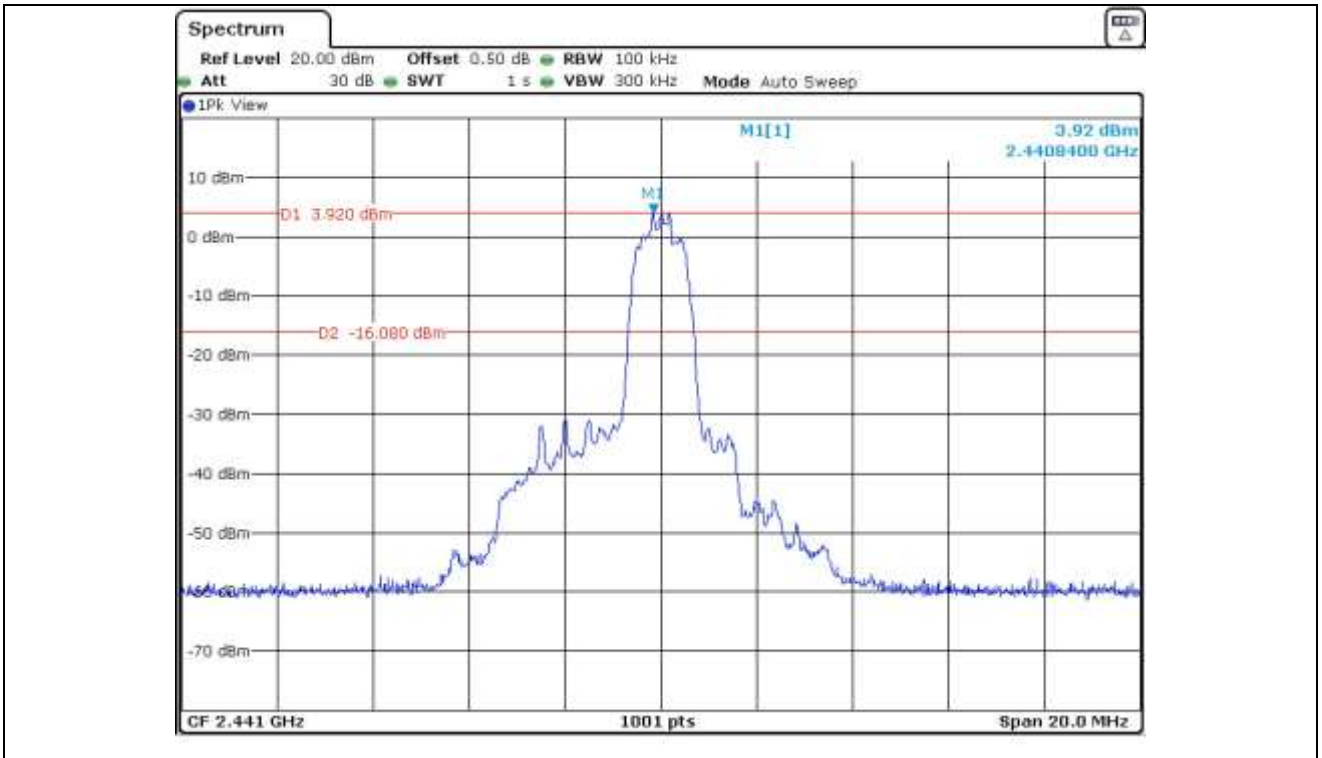



Middle Channel

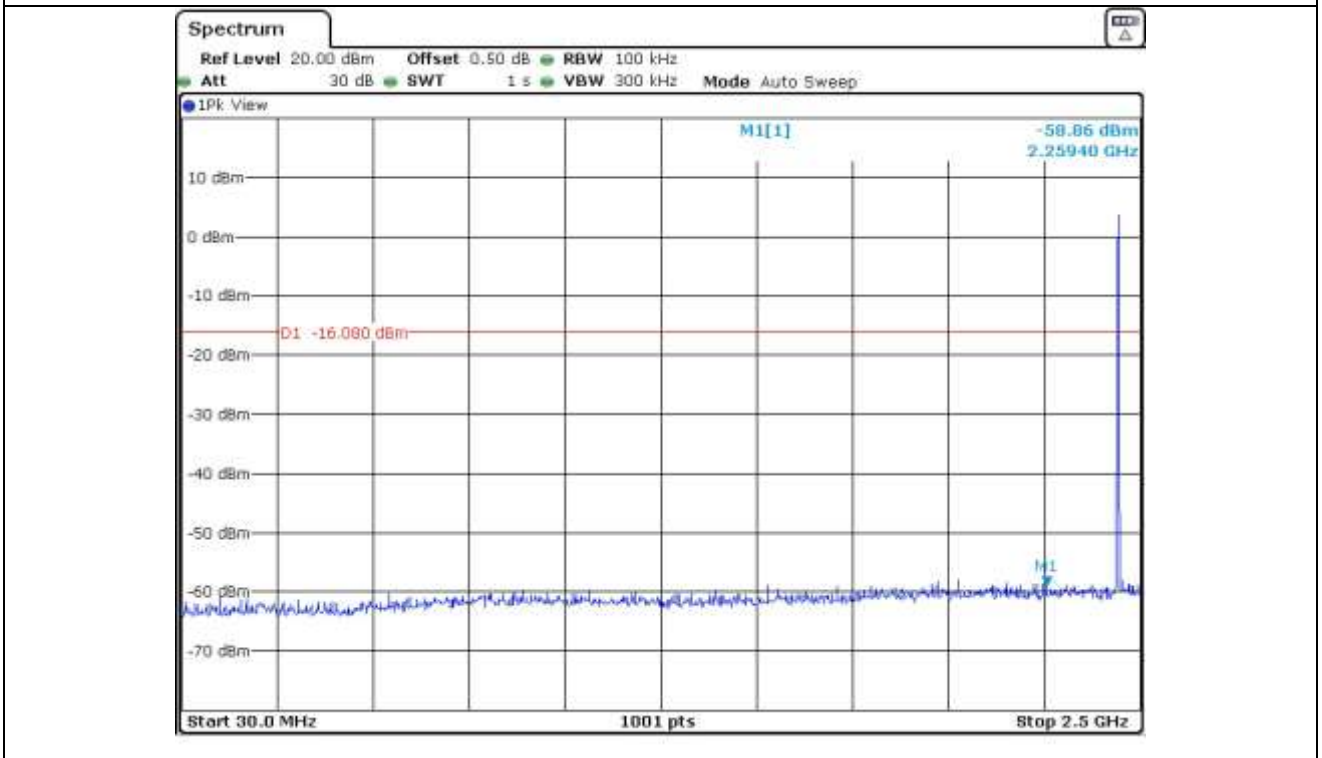


Middle Channel



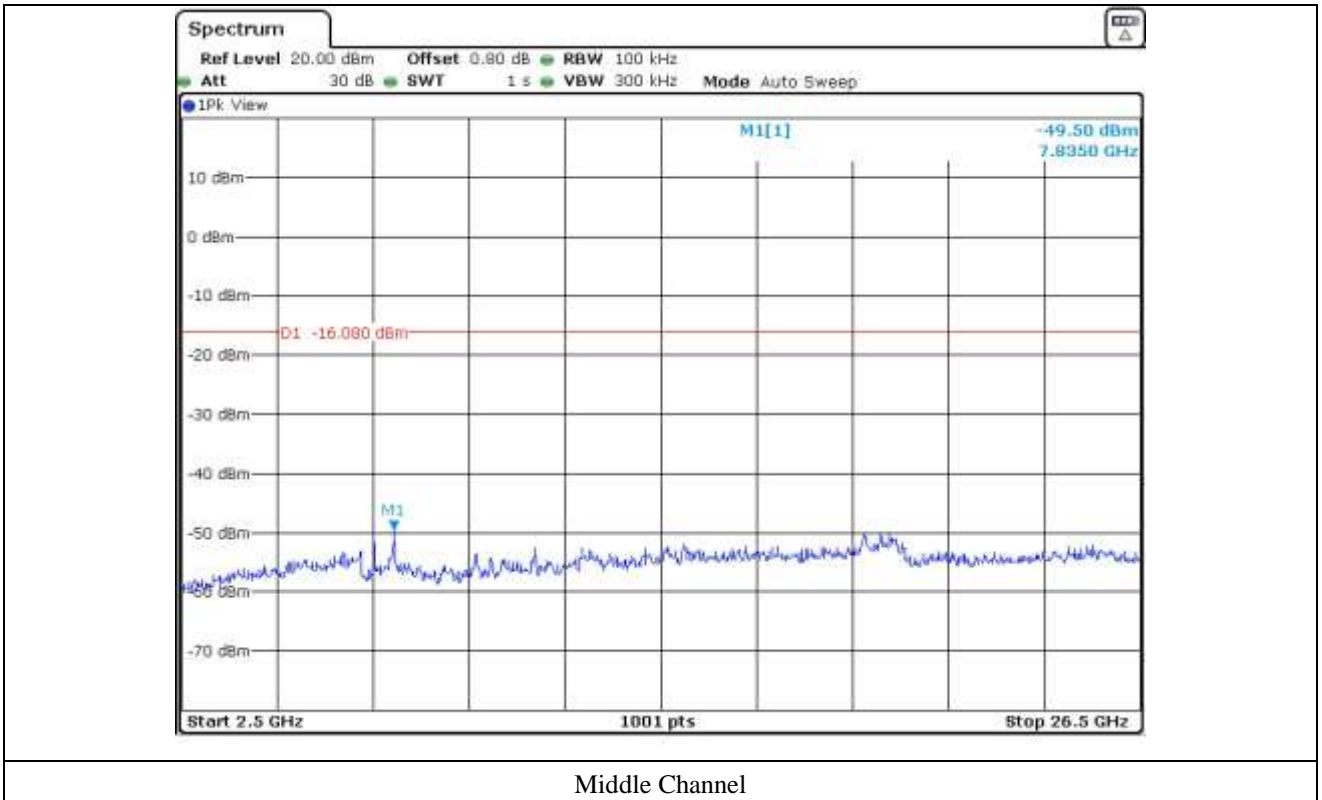


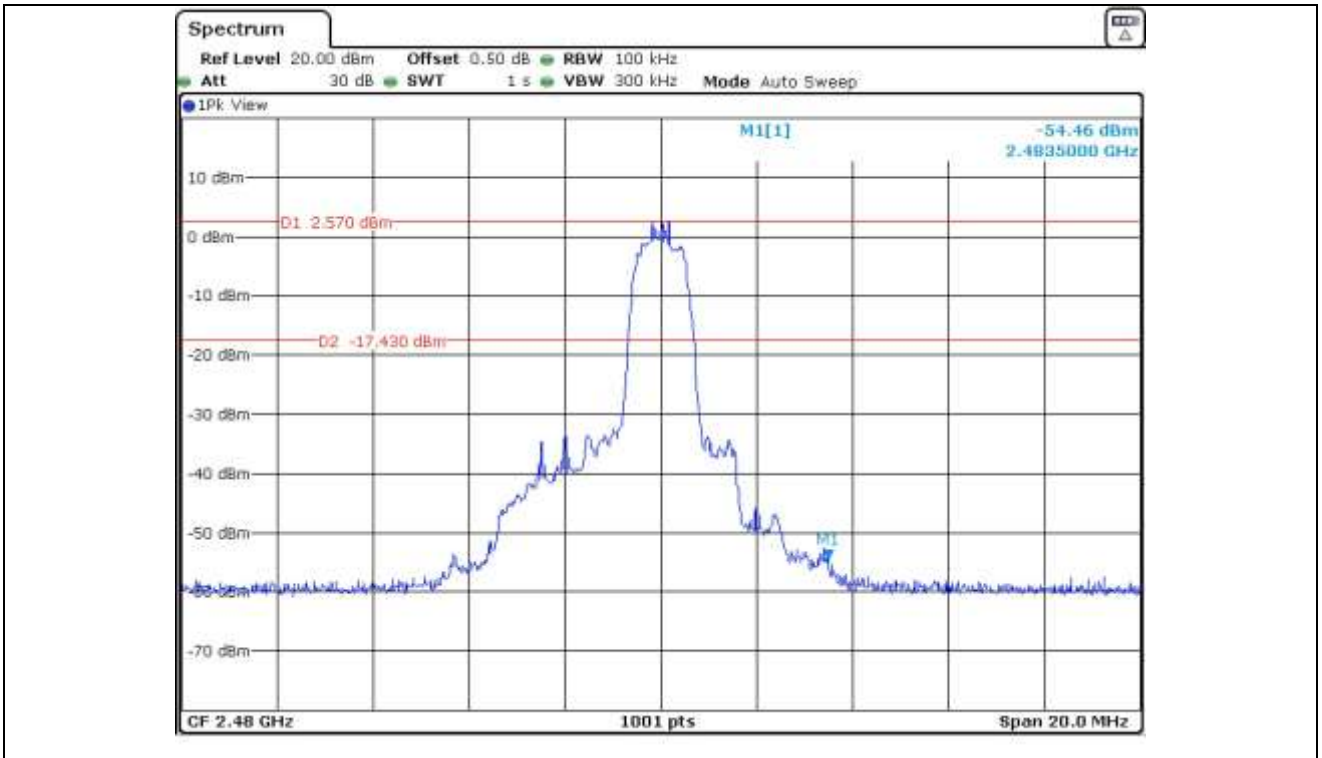


High Channel

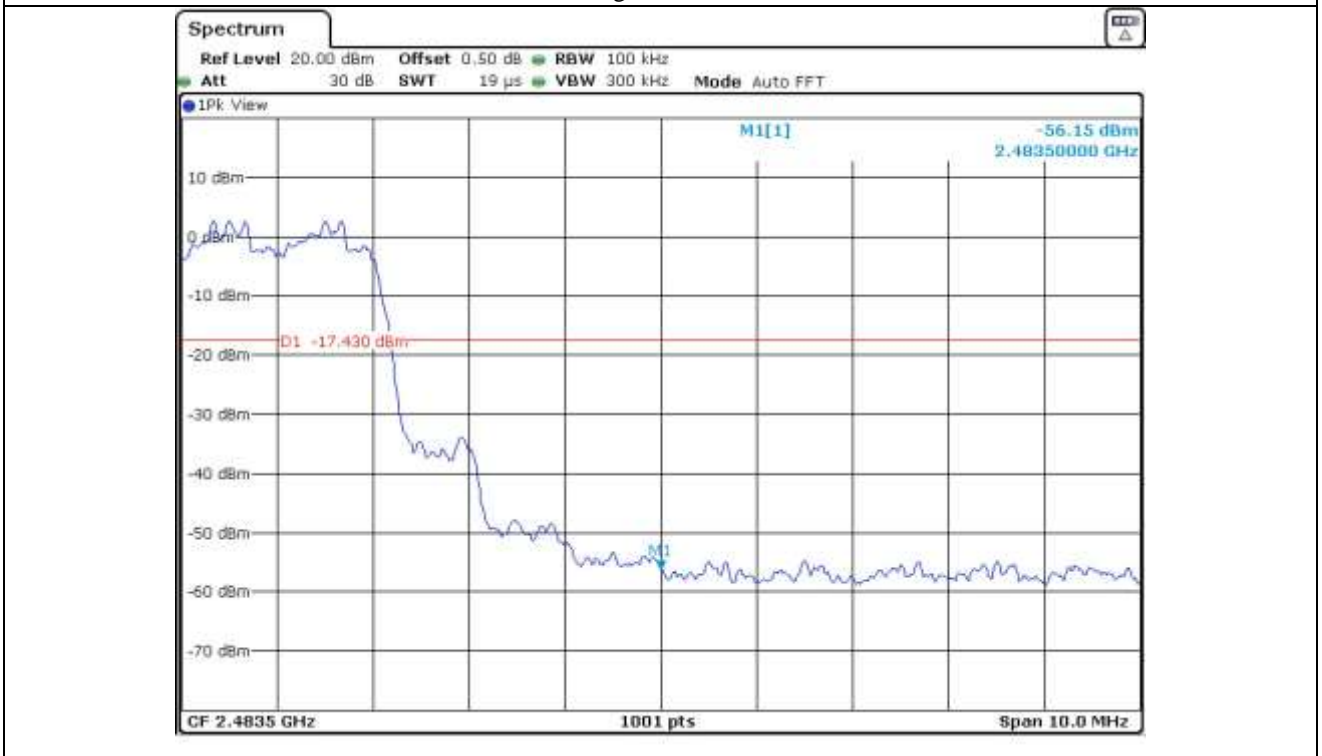

High Channel

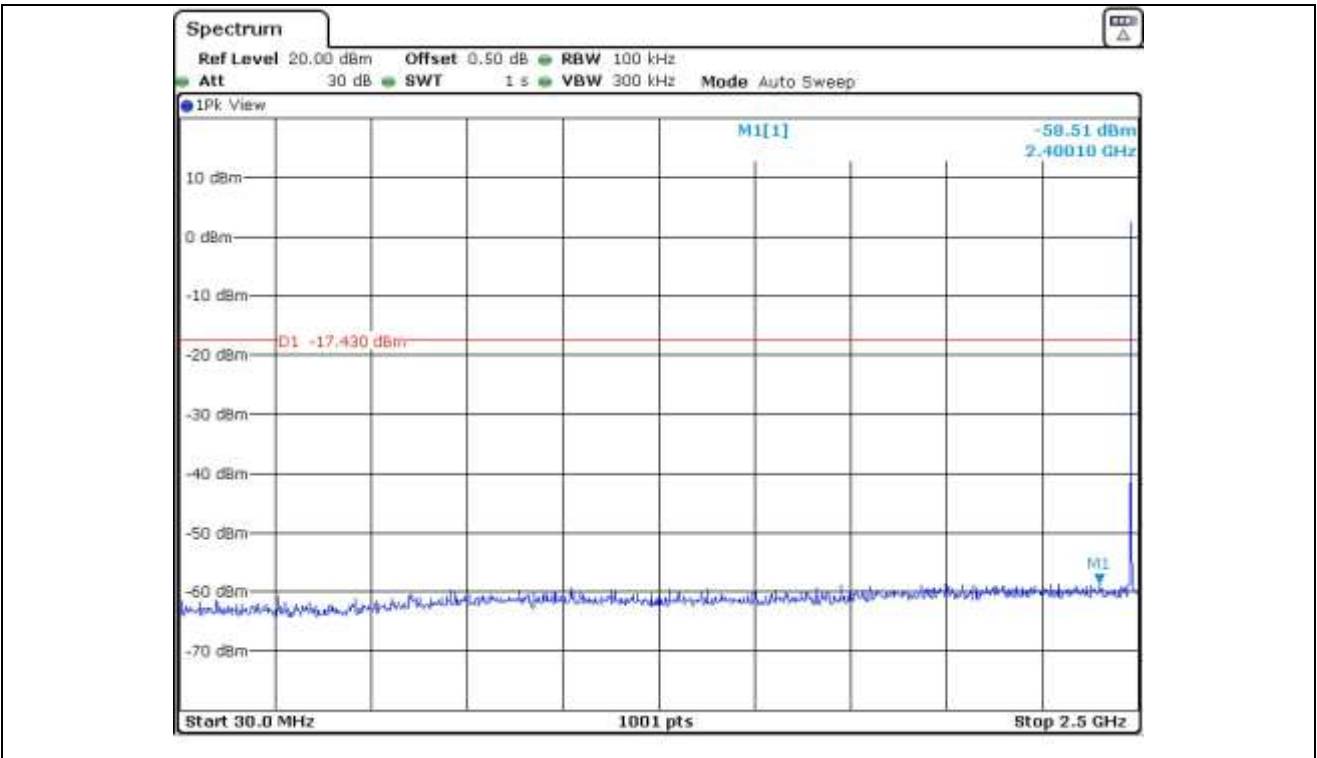

High Channel

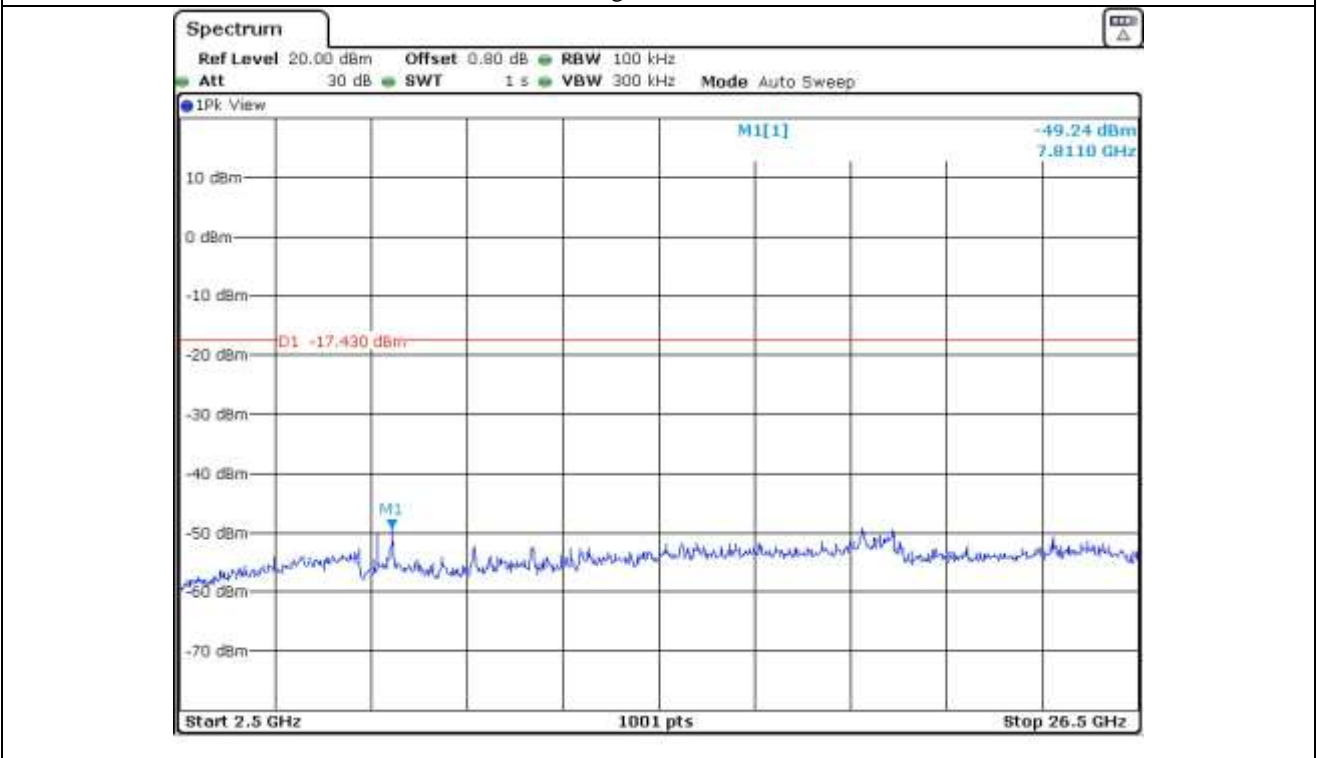

High Channel

**12.6 Test data for Transmitting mode radiated emission**

**12.6.1 Radiated Emission which fall in the Restricted Band**

**12.6.1.1 Test data for 1 Mbps**

- Test Date : September 05, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 390.00	45.12	Peak	H	27.10	7.50	43.00	36.72	74.00	37.28
	35.74	Average	H				27.34	54.00	26.66
	45.28	Peak	V				36.88	74.00	37.12
	35.61	Average	V				27.21	54.00	26.79
<b>Test Data for Low Channel</b>									
2 400.00	50.76	Peak	H	27.10	7.50	43.00	42.36	74.00	31.64
	41.38	Average	H				32.98	54.00	21.02
	50.52	Peak	V				42.12	74.00	31.88
	41.69	Average	V				33.29	54.00	20.71
<b>Test Data for High Channel</b>									
2 483.50	44.87	Peak	H	27.10	7.50	43.00	36.47	74.00	37.53
	35.53	Average	H				27.13	54.00	26.87
	45.00	Peak	V				36.60	74.00	37.40
	35.49	Average	V				27.09	54.00	26.91

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Hyung-Kwon, Oh / Engineer**

**12.6.1.2 Test data for 2 Mbps**

- Test Date : September 05, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 390.00	46.17	Peak	H	27.10	7.50	43.00	37.77	74.00	36.23
	36.07	Average	H				27.67	54.00	26.33
	46.22	Peak	V				37.82	74.00	36.18
	36.10	Average	V				27.70	54.00	26.30
<b>Test Data for Low Channel</b>									
2 400.00	51.31	Peak	H	27.10	7.50	43.00	42.91	74.00	31.09
	43.04	Average	H				34.64	54.00	19.36
	51.24	Peak	V				42.84	74.00	31.16
	42.88	Average	V				34.48	54.00	19.52
<b>Test Data for High Channel</b>									
2 483.50	46.00	Peak	H	27.10	7.50	43.00	37.60	74.00	36.40
	37.52	Average	H				29.12	54.00	24.88
	46.18	Peak	V				37.78	74.00	36.22
	37.45	Average	V				29.05	54.00	24.95

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Hyung-Kwon, Oh / Engineer**

**12.6.1.3 Test data for 3 Mbps**

- Test Date : September 05, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 390.00	45.33	Peak	H	27.10	7.50	43.00	36.93	74.00	37.07
	35.17	Average	H				26.77	54.00	27.23
	45.29	Peak	V				36.89	74.00	37.11
	35.25	Average	V				26.85	54.00	27.15
<b>Test Data for Low Channel</b>									
2 400.00	51.04	Peak	H	27.10	7.50	43.00	42.64	74.00	31.36
	42.82	Average	H				34.42	54.00	19.58
	51.19	Peak	V				42.79	74.00	31.21
	42.90	Average	V				34.50	54.00	19.50
<b>Test Data for High Channel</b>									
2 483.50	44.69	Peak	H	27.10	7.50	43.00	36.29	74.00	37.71
	35.21	Average	H				26.81	54.00	27.19
	44.73	Peak	V				36.33	74.00	37.67
	35.33	Average	V				26.93	54.00	27.07

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Hyung-Kwon, Oh / Engineer**

### 12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

#### 12.6.2.1 Test data for 1 Mbps

- Test Date : September 05, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	45.17	Peak	H	30.60	11.10	42.50	44.37	74.00	29.63
	38.32	Average	H				37.52	54.00	16.48
	45.04	Peak	V				44.24	74.00	29.76
	38.59	Average	V				37.79	54.00	16.21
<b>Test Data for Middle Channel</b>									
4 882.00	45.21	Peak	H	30.70	11.20	42.50	44.61	74.00	29.39
	38.29	Average	H				37.69	54.00	16.31
	45.25	Peak	V				44.65	74.00	29.35
	38.56	Average	V				37.96	54.00	16.04
<b>Test Data for High Channel</b>									
4 960.00	46.26	Peak	H	30.80	11.30	42.50	45.86	74.00	28.14
	39.33	Average	H				38.93	54.00	15.07
	46.21	Peak	V				45.81	74.00	28.19
	39.54	Average	V				39.14	54.00	14.86

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band



**Tested by: Hyung-Kwon, Oh / Engineer**

**12.6.2.2 Test data for 2 Mbps**

- Test Date : September 05, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	46.03	Peak	H	30.60	11.10	42.50	45.23	74.00	28.77
	39.15	Average	H				38.35	54.00	15.65
	46.11	Peak	V				45.31	74.00	28.69
	39.20	Average	V				38.40	54.00	15.60
<b>Test Data for Middle Channel</b>									
4 882.00	45.87	Peak	H	30.70	11.20	42.50	45.27	74.00	28.73
	38.92	Average	H				38.32	54.00	15.68
	45.90	Peak	V				45.30	74.00	28.70
	38.84	Average	V				38.24	54.00	15.76
<b>Test Data for High Channel</b>									
4 960.00	46.25	Peak	H	30.80	11.30	42.50	45.85	74.00	28.15
	39.28	Average	H				38.88	54.00	15.12
	46.30	Peak	V				45.90	74.00	28.10
	39.21	Average	V				38.81	54.00	15.19

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band



**Tested by: Hyung-Kwon, Oh / Engineer**



**12.6.2.3 Test data for 3 Mbps**

- Test Date : September 05, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	46.05	Peak	H	30.60	11.10	42.50	45.25	74.00	28.75
	39.22	Average	H				38.42	54.00	15.58
	46.14	Peak	V				45.34	74.00	28.66
	39.31	Average	V				38.51	54.00	15.49
<b>Test Data for Middle Channel</b>									
4 882.00	45.90	Peak	H	30.70	11.20	42.50	45.30	74.00	28.70
	38.99	Average	H				38.39	54.00	15.61
	45.87	Peak	V				45.27	74.00	28.73
	39.07	Average	V				38.47	54.00	15.53
<b>Test Data for High Channel</b>									
4 960.00	46.11	Peak	H	30.80	11.30	42.50	45.71	74.00	28.29
	39.21	Average	H				38.81	54.00	15.19
	46.16	Peak	V				45.76	74.00	28.24
	39.29	Average	V				38.89	54.00	15.11

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band



**Tested by: Hyung-Kwon, Oh / Engineer**

### 13. RADIATED EMISSION TEST

#### 13.1 Operating environment

Temperature : 21.6 °C  
 Relative humidity : 43.0 % R.H.

#### 13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

#### 13.3 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)
■ - ESCI	Rohde & Schwarz	Test Receiver	101012	Nov. 03, 2014 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 29, 2015 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	10041	Nov. 25, 2014 (1Y)
■ - DT3000	Innco System	Turn Table	930611	N/A
■ - MA4000-EP	Innco System	Antenna Master	3320611	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Jul. 10, 2014 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Apr. 30, 2015 (2Y)

All test equipment used is calibrated on a regular basis.

13.4 Test data for 1 Mbps

13.4.1 Test data for 30 MHz ~ 1 000 MHz

- . Test Date : September 05, 2015
- . Resolution bandwidth : 120 kHz
- . Frequency range : 30 MHz ~ 1 000 MHz
- . Measurement distance : 3 m

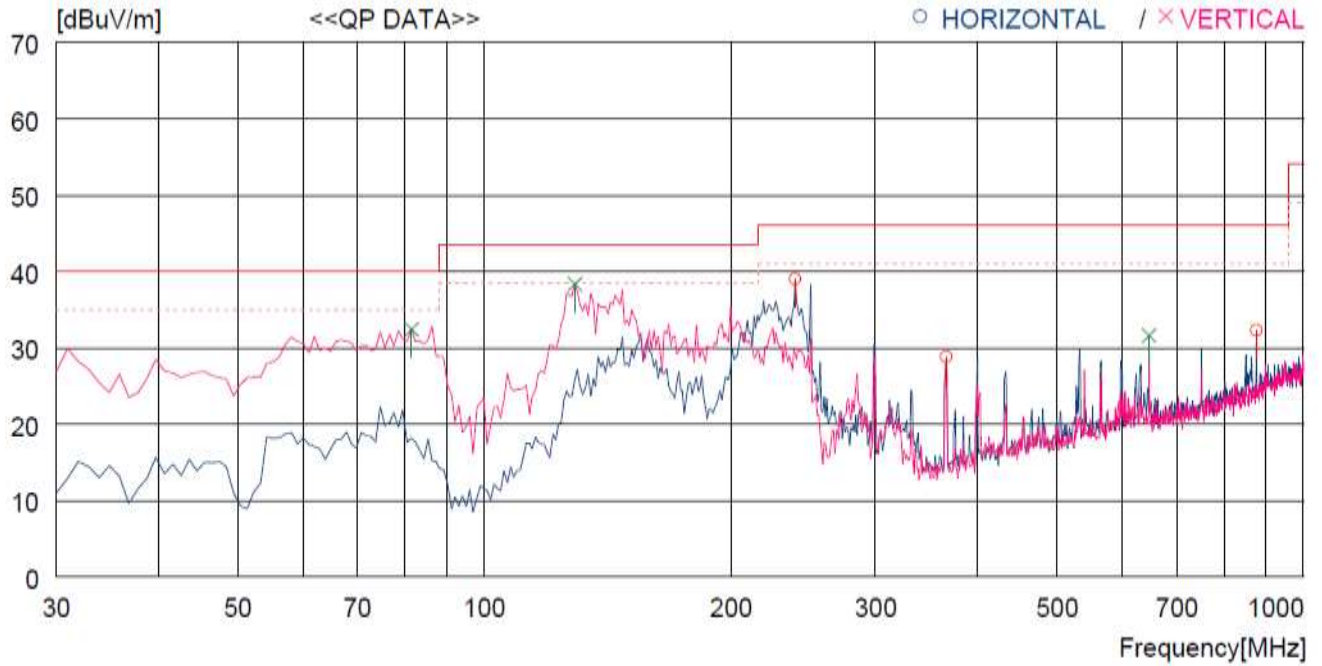

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	239.520	55.3	12.1	4.5	32.9	39.0	46.0	7.0	100	104
2	366.590	41.1	15.1	5.6	33.0	28.8	46.0	17.2	100	26
3	875.830	33.8	21.9	9.1	32.5	32.3	46.0	13.7	100	104
----- Vertical -----										
4	81.410	55.1	7.8	2.6	33.1	32.4	40.0	7.6	100	2
5	128.940	58.7	9.3	3.3	33.0	38.3	43.5	5.2	100	47
6	647.887	37.8	19.4	7.7	33.3	31.6	46.0	14.4	100	12

Tested by: Hyung-Kwon, Oh / Engineer

**13.4.2 Test data for Below 30 MHz**

- . Test Date : September 05, 2015
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								

**13.4.3 Test data for above 1 GHz**

- . Test Date : September 05, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								




**Tested by: Hyung-Kwon, Oh / Engineer**

**13.5 Test data for 2 Mbps**

**13.5.1 Test data for 30 MHz ~ 1 000 MHz**

- Test Date : September 05, 2015
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

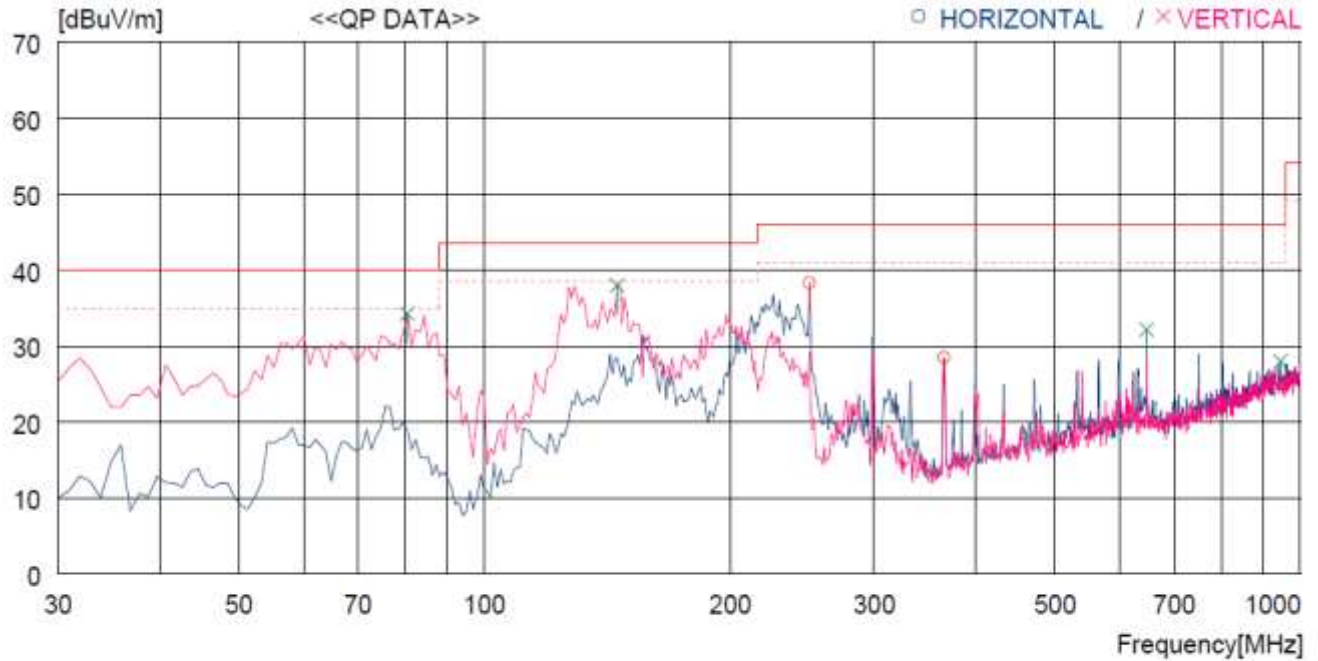

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	250.190	54.1	12.4	4.6	32.8	38.3	46.0	7.7	100	33
2	365.620	40.4	15.1	5.6	32.6	28.5	46.0	17.5	100	33
----- Vertical -----										
3	80.440	57.2	7.6	2.6	33.2	34.2	40.0	5.8	100	12
4	145.430	59.3	8.2	3.5	33.0	38.0	43.5	5.5	100	12
5	647.887	38.4	19.4	7.7	33.4	32.1	46.0	13.9	100	12
6	944.698	28.5	22.5	9.4	32.4	28.0	46.0	18.0	100	12

**Tested by: Hyung-Kwon, Oh / Engineer**

**13.5.2 Test data for Below 30 MHz**

- . Test Date : September 05, 2015
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								

**13.5.3 Test data for above 1 GHz**

- . Test Date : September 05, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								




**Tested by: Hyung-Kwon, Oh / Engineer**



13.6 Test data for 3 Mbps

13.6.1 Test data for 30 MHz ~ 1 000 MHz

- Test Date : September 05, 2015
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

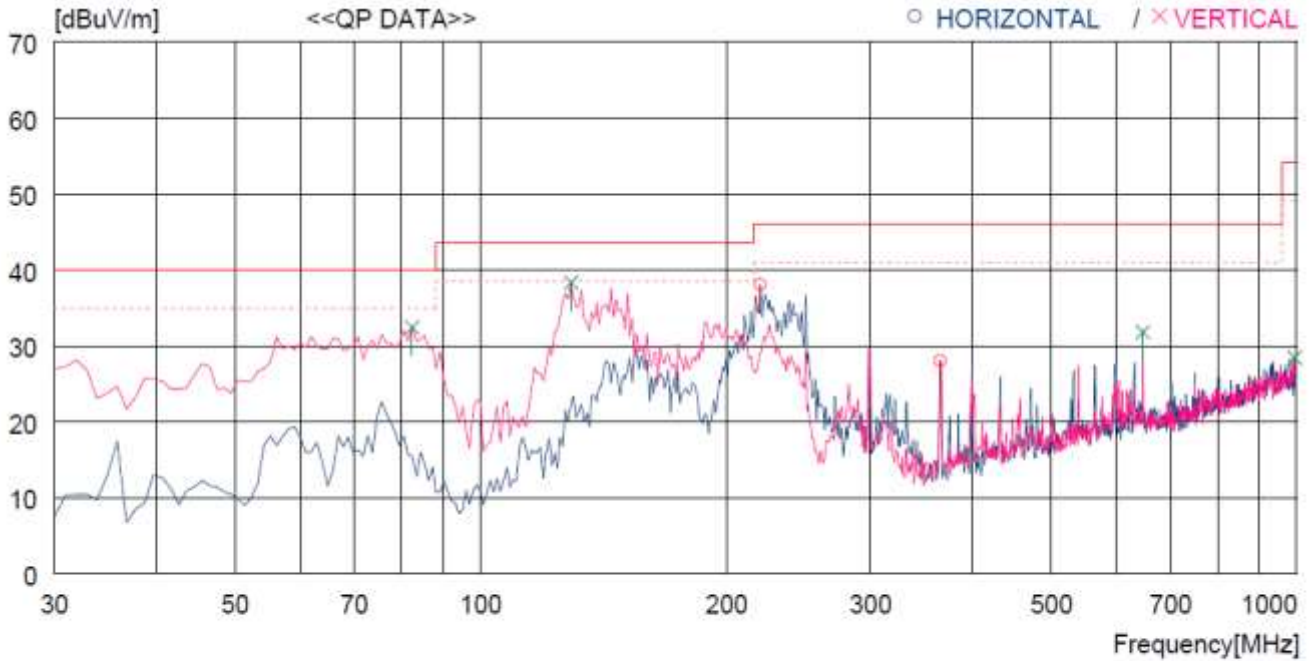

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	220.120	55.2	11.4	4.3	32.9	38.0	46.0	8.0	100	2
2	365.620	40.3	15.1	5.6	33.0	28.0	46.0	18.0	100	12
----- Vertical -----										
3	82.380	54.8	8.1	2.6	33.1	32.4	40.0	7.6	100	18
4	128.940	58.7	9.3	3.3	33.0	38.3	43.5	5.2	100	18
5	647.887	38.0	19.4	7.7	33.3	31.8	46.0	14.2	100	18
6	994.166	27.7	22.6	9.7	31.6	28.4	54.0	25.6	100	11

Tested by: Hyung-Kwon, Oh / Engineer

**13.6.2 Test data for Below 30 MHz**

- . Test Date : September 05, 2015
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								

**13.6.3 Test data for above 1 GHz**

- . Test Date : September 05, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								



**Tested by: Hyung-Kwon, Oh / Engineer**



## 14. CONDUCTED EMISSION TEST

### 14.1 Operating environment

Temperature : 21.4 °C  
 Relative humidity : 45.1 % R.H.

### 14.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


### 14.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESPI	Rohde & Schwarz	Test Receiver	101012	Nov. 03, 2014 (1Y)
□ - ESHS10	Rohde & Schwarz	Test Receiver	834467/007	Apr. 29, 2015 (1Y)
□ - NSLK8128	Schwarzbeck	AMN	8128-216	Apr. 06, 2015 (1Y)
■ - NSLK8126	Schwarzbeck	AMN	8126-404	Apr. 29, 2015 (1Y)
□ - 3825/2	EMCO	AMN	9109-1869	Apr. 29, 2015 (1Y)
■ - 3825/2	EMCO	AMN	9109-1867	Apr. 29, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


### 14.4 Test data

- Test Date : September 05, 2015
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

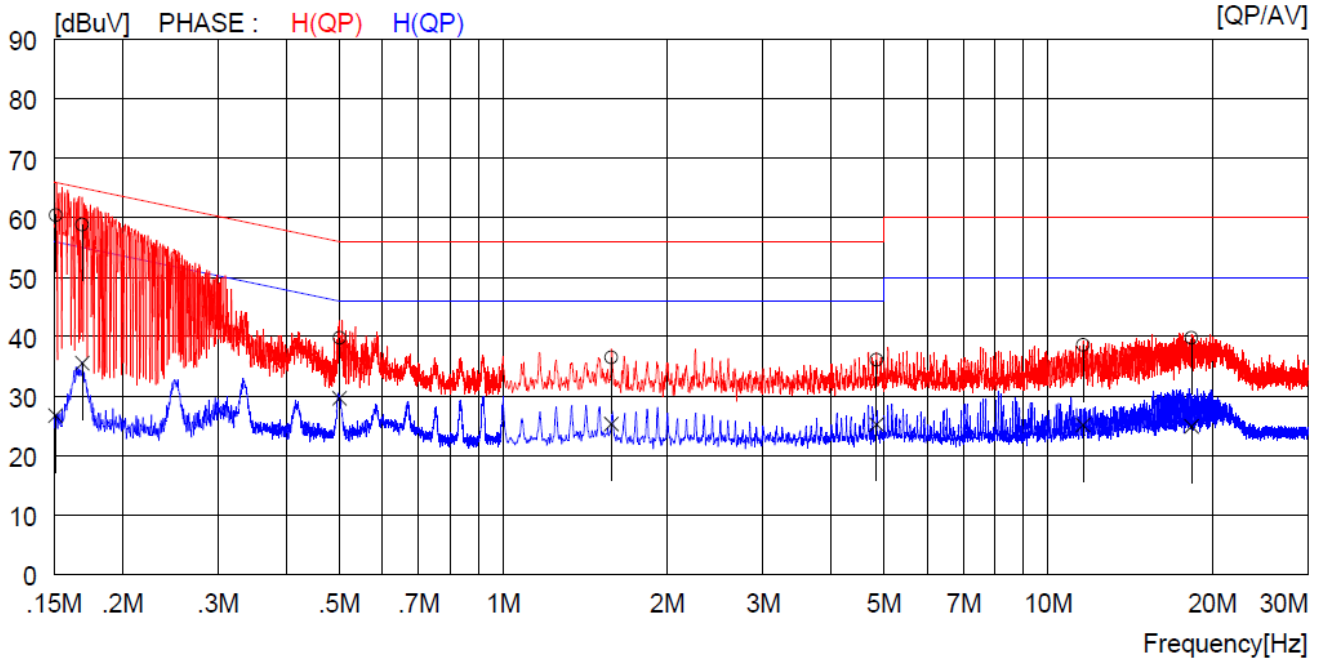

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT	MARGIN	PHASE			
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]						
1	0.15100	40.2	---	---	20.2	60.4	---	65.9	---	5.5	---	H(QP)
2	0.16900	38.6	---	---	20.2	58.8	---	65.0	---	6.2	---	H(QP)
3	0.50100	19.6	---	---	20.2	39.8	---	56.0	---	16.2	---	H(QP)
4	1.58000	16.3	---	---	20.2	36.5	---	56.0	---	19.5	---	H(QP)
5	4.84400	15.8	---	---	20.3	36.1	---	56.0	---	19.9	---	H(QP)
6	11.59000	18.3	---	---	20.3	38.6	---	60.0	---	21.4	---	H(QP)
7	18.34000	19.5	---	---	20.3	39.8	---	60.0	---	20.2	---	H(QP)
8	0.15100	---	6.5	---	20.2	---	26.7	---	55.9	---	29.2	H(CAV)
9	0.16900	---	15.3	---	20.2	---	35.5	---	55.0	---	19.5	H(CAV)
10	0.50100	---	9.4	---	20.2	---	29.6	---	46.0	---	16.4	H(CAV)
11	1.58000	---	5.1	---	20.2	---	25.3	---	46.0	---	20.7	H(CAV)
12	4.84400	---	4.9	---	20.3	---	25.2	---	46.0	---	20.8	H(CAV)
13	11.59000	---	4.8	---	20.3	---	25.1	---	50.0	---	24.9	H(CAV)
14	18.34000	---	4.6	---	20.3	---	24.9	---	50.0	---	25.1	H(CAV)

- Tested Line : NEUTRAL LINE

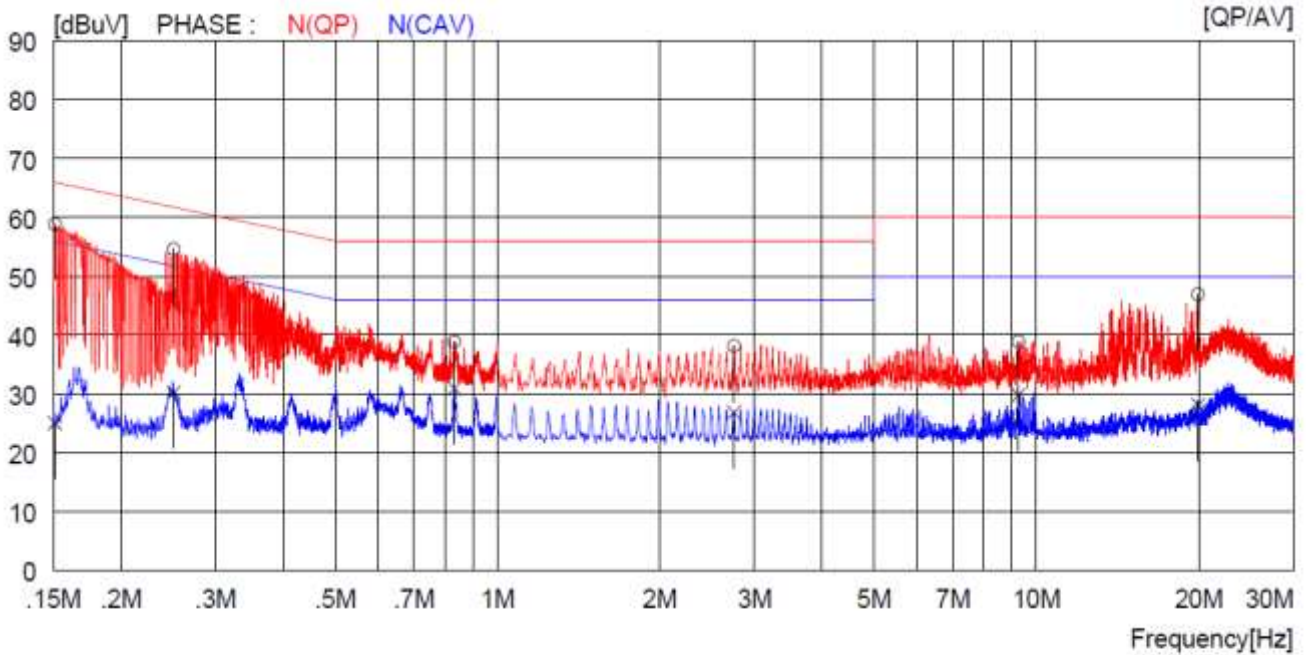

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN	PHASE		
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]				
1	0.15100	38.6	---	---	20.2	58.8	---	65.9	---	7.1	---	N(QP)
2	0.25100	34.4	---	---	20.2	54.6	---	61.7	---	7.1	---	N(QP)
3	0.83200	18.6	---	---	20.2	38.8	---	56.0	---	17.2	---	N(QP)
4	2.74800	17.9	---	---	20.2	38.1	---	56.0	---	17.9	---	N(QP)
5	9.27000	18.6	---	---	20.3	38.9	---	60.0	---	21.1	---	N(QP)
6	19.95000	26.7	---	---	20.2	46.9	---	60.0	---	13.1	---	N(QP)
7	0.15100	---	---	4.8	20.2	---	25.0	---	55.9	---	30.9	N(CAV)
8	0.25100	---	---	10.0	20.2	---	30.2	---	51.7	---	21.5	N(CAV)
9	0.83200	---	---	10.7	20.2	---	30.9	---	46.0	---	15.1	N(CAV)
10	2.74800	---	---	6.6	20.2	---	26.8	---	46.0	---	19.2	N(CAV)
11	9.27000	---	---	9.5	20.3	---	29.8	---	50.0	---	20.2	N(CAV)
12	19.95000	---	---	7.9	20.2	---	28.1	---	50.0	---	21.9	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Hyung-Kwon, Oh / Engineer