

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER


Test Report No. : W174R-D001
AGR No. : A172A-372
Applicant : LG Innotek Co., Ltd.
Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Manufacturer : LG Innotek Co., Ltd.
Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Type of Equipment : BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module
FCC ID. : YZP-RBHP-B216C
Model Name : RBHP-B216C
Serial number : N/A
Total page of Report : 83 pages (including this page)
Date of Incoming : March 21, 2017
Date of issue : April 05, 2017

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by: 

 Ki-Hong, Nam / Asst, Chief Engineer
 ONETECH Corp.

Approved by: 

 Keun-Young, Choi / Vice President
 ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY	7
2.6 TEST FACILITY	8
3. GENERAL INFORMATION	9
3.1 PRODUCT DESCRIPTION	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT	12
4. EUT MODIFICATIONS	12
5. SYSTEM TEST CONFIGURATION	13
5.1 JUSTIFICATION	13
5.2 PERIPHERAL EQUIPMENT	13
5.3 CONFIGURATION OF TEST SYSTEM	13
5.4 ANTENNA REQUIREMENT	13
6. PRELIMINARY TEST	14
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	14
6.2 GENERAL RADIATED EMISSIONS TESTS	14
7. MINIMUM 20 DB BANDWIDTH	15
7.1 OPERATING ENVIRONMENT	15
7.2 TEST SET-UP	15
7.3 TEST EQUIPMENT USED	15
7.4 TEST DATA FOR 1 MBPS	16
7.5 TEST DATA FOR 2 MBPS	18
7.6 TEST DATA FOR 3 MBPS	20
8. HOPPING FREQUENCY SEPARATION	22
8.1 OPERATING ENVIRONMENT	22
8.2 TEST SET-UP	22
8.3 TEST EQUIPMENT USED	22

8.4 TEST DATA FOR 1 MBPS	23
8.5 TEST DATA FOR 2 MBPS	24
8.6 TEST DATA FOR 3 MBPS	25
9. NUMBER OF HOPPING CHANNELS	26
9.1 OPERATING ENVIRONMENT	26
9.2 TEST SET-UP	26
9.3 TEST EQUIPMENT USED	26
9.4 TEST DATA FOR 1 MBPS	27
9.5 TEST DATA FOR 2 MBPS	30
9.6 TEST DATA FOR 3 MBPS	33
10. TIME OF OCCUPANCY	36
10.1 OPERATING ENVIRONMENT	36
10.2 TEST SET-UP	36
10.3 TEST EQUIPMENT USED	36
10.4 TEST DATA FOR 1 MBPS	37
10.5 TEST DATA FOR 2 MBPS	40
10.6 TEST DATA FOR 3 MBPS	43
11. MAXIMUM PEAK OUTPUT POWER	46
11.1 OPERATING ENVIRONMENT	46
11.2 TEST SET-UP	46
11.3 TEST EQUIPMENT USED	46
11.4 TEST DATA FOR 1 MBPS	47
11.5 TEST DATA FOR 2 MBPS	49
11.6 TEST DATA FOR 3 MBPS	51
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	53
12.1 OPERATING ENVIRONMENT	53
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	53
12.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	53
12.4 TEST EQUIPMENT USED	53
12.5 TEST DATA FOR CONDUCTED EMISSION	54
12.5.1 Test data for 1 Mbps	54
12.5.2 Test data for 2 Mbps	59
12.5.3 Test data for 3 Mbps	64
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	69
12.6.1 Radiated Emission which fall in the Restricted Band.....	69
12.6.2 Radiated Emission which fall in the Band Edge	72

12.6.3 Spurious & Harmonic Radiated Emission above 1 GHz.....	75
13. RADIATED EMISSION TEST	78
13.1 OPERATING ENVIRONMENT	78
13.2 TEST SET-UP	78
13.3 TEST EQUIPMENT USED.....	78
13.4 TEST DATA FOR 30 MHz ~ 1 000 MHz	79
13.5 TEST DATA FOR BELOW 30 MHz	80
13.6 TEST DATA FOR ABOVE 1 GHz	80
14. CONDUCTED EMISSION TEST.....	81
14.1 OPERATING ENVIRONMENT	81
14.2 TEST SET-UP	81
14.3 TEST EQUIPMENT USED.....	81
14.4 TEST DATA.....	82

REVISION HISTORY

Issued Report No.	Issued Date	Revisions	Effect Section
W174R-D001	April 05, 2017	Initial Issue	All

DOCUMENT HISTORY

Revision No.	Issued Date	Revisions	Effect Section
Original	April 05, 2017	Initial Issue	-
Revision 01	April 11, 2017	The add FCC ID/IC information and DFS function.	12 Page
Revision 02	April 12, 2017	The add information for master device.	13 Page
Revision 03		The modify information for master device.	13 Page
Revision 04	April 13, 2017	Delete for the FCC ID/IC information.	12 Page

1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.
 Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
 Contact Person : Inchang Jeong / Senior Research Eng
 Telephone No. : +82-62-950-0332
 FCC ID : YZP-RBHP-B216C
 Model Name : RBHP-B216C
 Serial Number : N/A
 Date : April 05, 2017

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Modular Transmitter, BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (b) (5)	Radio Frequency Exposure Level	Met requirement / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Innotek Co., Ltd., Model RBHP-B216C (referred to as the EUT in this report) is a BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module. Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module		
FREQUENCY RANGE	Bluetooth	2 402 MHz ~ 2 480 MHz	
	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))	
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
			5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
			5 210 MHz (802.11ac(VHT80))
		5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
			5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
			5 290 MHz (802.11ac(VHT80))
		5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 720 MHz (802.11a/n(HT20)/ac(VHT20))
			5 510 MHz ~ 5 710 MHz (802.11n(HT40)/ac(VHT40))
5 530 MHz (802.11ac(VHT80))			
5 725 MHz ~ 5 850 MHz Band		5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))	
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))	
		5 775 MHz (802.11ac(VHT80))	

MAX. RF OUTPUT POWER	Bluetooth	1 Mbps	0.97 dBm	
		2 Mbps	-1.67 dBm	
		3 Mbps	-1.24 dBm	
	WLAN 2.4 GHz Band	Wi-Fi 802.11b (16.40 dBm) Wi-Fi 802.11g (15.84 dBm) Wi-Fi 802.11n(HT20) (15.05 dBm)		
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	Antenna 0	Wi-Fi 802.11a (13.96 dBm) Wi-Fi 802.11n(HT20) (11.80 dBm) Wi-Fi 802.11n(HT40) (10.14 dBm) Wi-Fi 802.11ac(HT80) (12.61 dBm)
			Antenna 1	Wi-Fi 802.11a (13.92 dBm) Wi-Fi 802.11n(HT20) (10.62 dBm) Wi-Fi 802.11n(HT40) (10.54 dBm) Wi-Fi 802.11ac(HT80) (12.66 dBm)
			Antenna 0 + Antenna 1	Wi-Fi 802.11n(HT20) (14.24 dBm) Wi-Fi 802.11n(HT40) (13.29 dBm) Wi-Fi 802.11ac(HT80) (12.96 dBm)
		5 250 MHz ~ 5 350 MHz Band	Antenna 0	Wi-Fi 802.11a (14.42 dBm) Wi-Fi 802.11n(HT20) (14.61 dBm) Wi-Fi 802.11n(HT40) (14.10 dBm) Wi-Fi 802.11ac(HT80) (12.51 dBm)
			Antenna 1	Wi-Fi 802.11a (14.41 dBm) Wi-Fi 802.11n(HT20) (14.54 dBm) Wi-Fi 802.11n(HT40) (13.56 dBm) Wi-Fi 802.11ac(HT80) (13.21 dBm)
			Antenna 0 + Antenna 1	Wi-Fi 802.11n(HT20) (17.59 dBm) Wi-Fi 802.11n(HT40) (16.85 dBm) Wi-Fi 802.11ac(HT80) (15.88 dBm)

MAX. RF OUTPUT POWER	WLAN 5 GHz Band	5 470 MHz ~ 5 725 MHz Band	Antenna 0	Wi-Fi 802.11a (14.91 dBm) Wi-Fi 802.11n(HT20) (14.94 dBm) Wi-Fi 802.11n(HT40) (14.81 dBm) Wi-Fi 802.11ac(HT80) (12.99 dBm)
			Antenna 1	Wi-Fi 802.11a (14.62 dBm) Wi-Fi 802.11n(HT20) (14.97 dBm) Wi-Fi 802.11n(HT40) (14.32 dBm) Wi-Fi 802.11ac(HT80) (13.44dBm)
			Antenna 0 + Antenna 1	Wi-Fi 802.11n(HT20) (17.88 dBm) Wi-Fi 802.11n(HT40) (17.58 dBm) Wi-Fi 802.11ac(HT80) (16.23 dBm)
		5 725 MHz ~ 5 850 MHz Band	Antenna 0	Wi-Fi 802.11a (14.58 dBm) Wi-Fi 802.11n(HT20) (14.27 dBm) Wi-Fi 802.11n(HT40) (13.88 dBm) Wi-Fi 802.11ac(HT80) (12.80 dBm)
			Antenna 1	Wi-Fi 802.11a (14.74 dBm) Wi-Fi 802.11n(HT20) (14.84 dBm) Wi-Fi 802.11n(HT40) (14.69 dBm) Wi-Fi 802.11ac(HT80) (13.88 dBm)
			Antenna 0 + Antenna 1	Wi-Fi 802.11n(HT20) (17.57 dBm) Wi-Fi 802.11n(HT40) (17.31 dBm) Wi-Fi 802.11ac(HT80) (16.38 dBm)
MODULATION TYPE	Bluetooth	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps		
	WLAN 2.4 GHz Band	DSSS Modulation(DBPSK/DQPSK/CCK)		
	WLAN 5 GHz Band	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)		

ANTENNA TYPE & GAIN	Bluetooth (BDR/EDR)	2.2 dBi		
	WLAN 2.4 GHz Band (802.11b/g/n(HT20))	4.8 dBi		
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	5.4 dBi	
		Antenna 1	5.7 dBi	
		Antenna 0 + Antenna 1	8.56 dBi	
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	5.6 dBi	
		Antenna 1	4.8 dBi	
		Antenna 0 + Antenna 1	8.23 dBi	
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	5.7 dBi	
		Antenna 1	5.3 dBi	
		Antenna 0 + Antenna 1	8.51 dBi	
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	5.2 dBi	
		Antenna 1	5.4 dBi	
Antenna 0 + Antenna 1		8.31 dBi		
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	37.4 MHz			
DFS FUNCTION	Slave without radar detection			

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Innotek Co., Ltd.	RBHA-B2168_RDK_Rev0.1	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
RBHP-B216C	LG Innotek Co., Ltd.	BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module (EUT)	Notebook PC
PP11L	DELL	Notebook PC	EUT
WEA504i	Samsung Electronics Co Ltd	WLAN Access Point (FCC ID.: A3LWEA504I)	EUT

5.3 Configuration of Test System

Line Conducted Test: The jig board of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.4 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is WLAN 2.4 GHz Band & WLAN 5 GHz Band is PCB antenna and Bluetooth & WLAN 5 GHz Band is PIFA antenna so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 22 °C
 Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

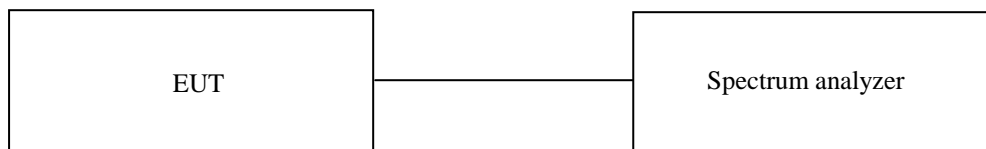

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	April 05, 2017 (1Y)


All test equipment used is calibrated on a regular basis.


7.4 Test data for 1 Mbps

-. Test Date : March 28, 2017


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	924.10
Middle	2 441	924.10
High	2 480	929.10

Tested by: Tae-Ho, Kim / Senior Engineer

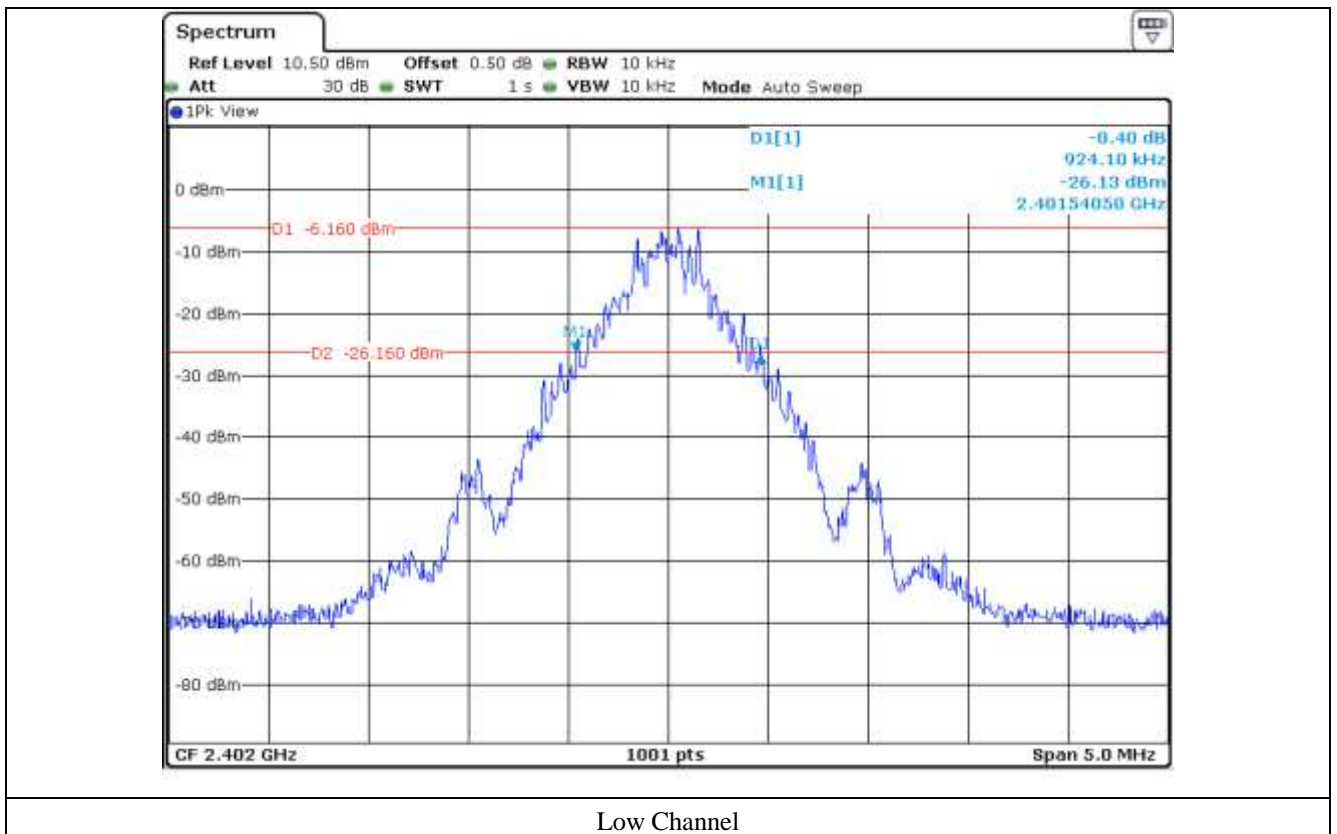

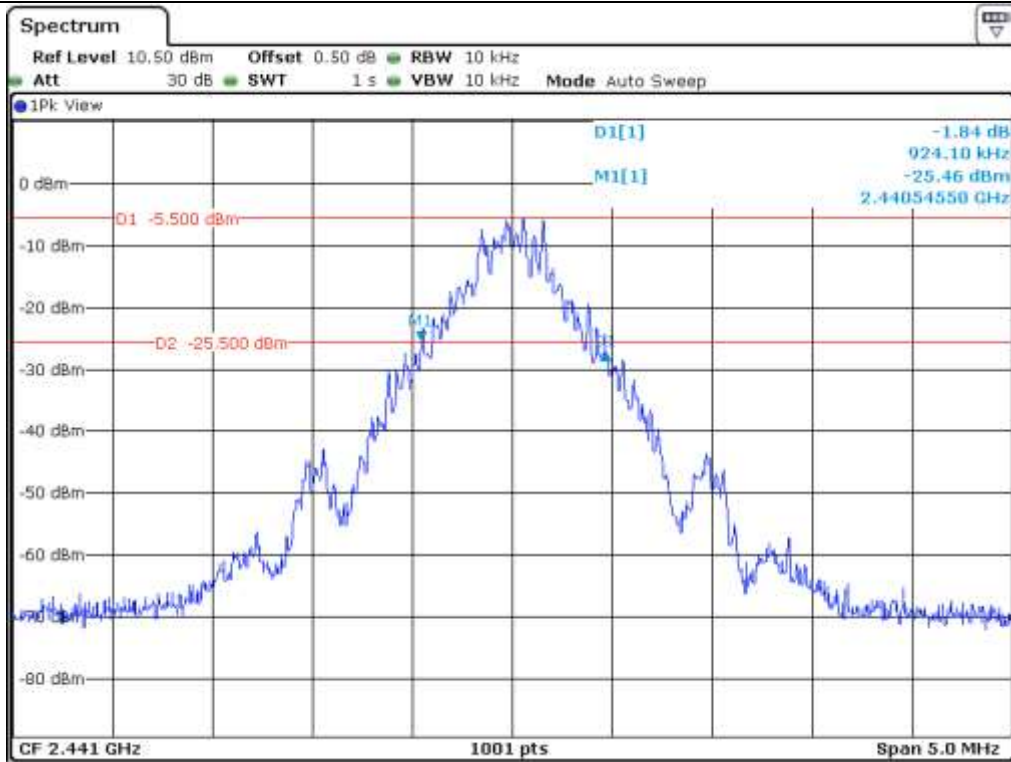

Middle Channel

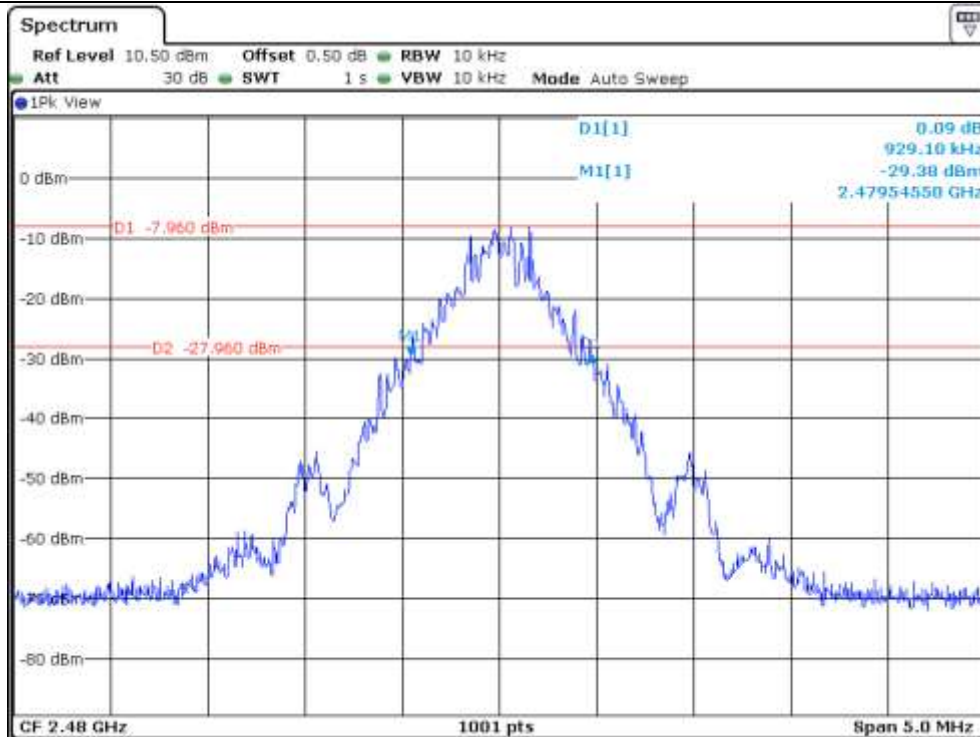


High Channel


7.5 Test data for 2 Mbps

-. Test Date : March 28, 2017


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 323.70
Middle	2 441	1 323.70
High	2 480	1 328.70

Tested by: Tae-Ho, Kim / Senior Engineer

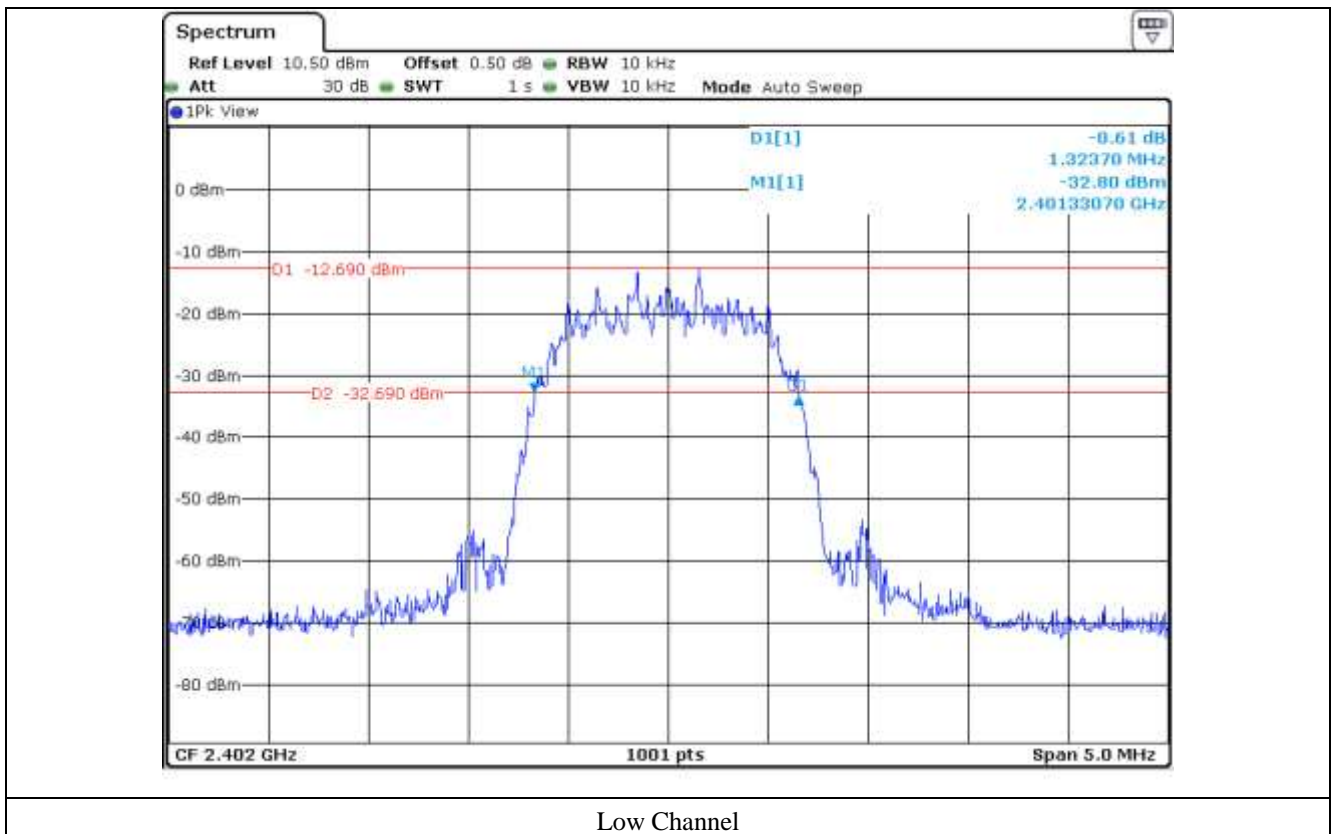

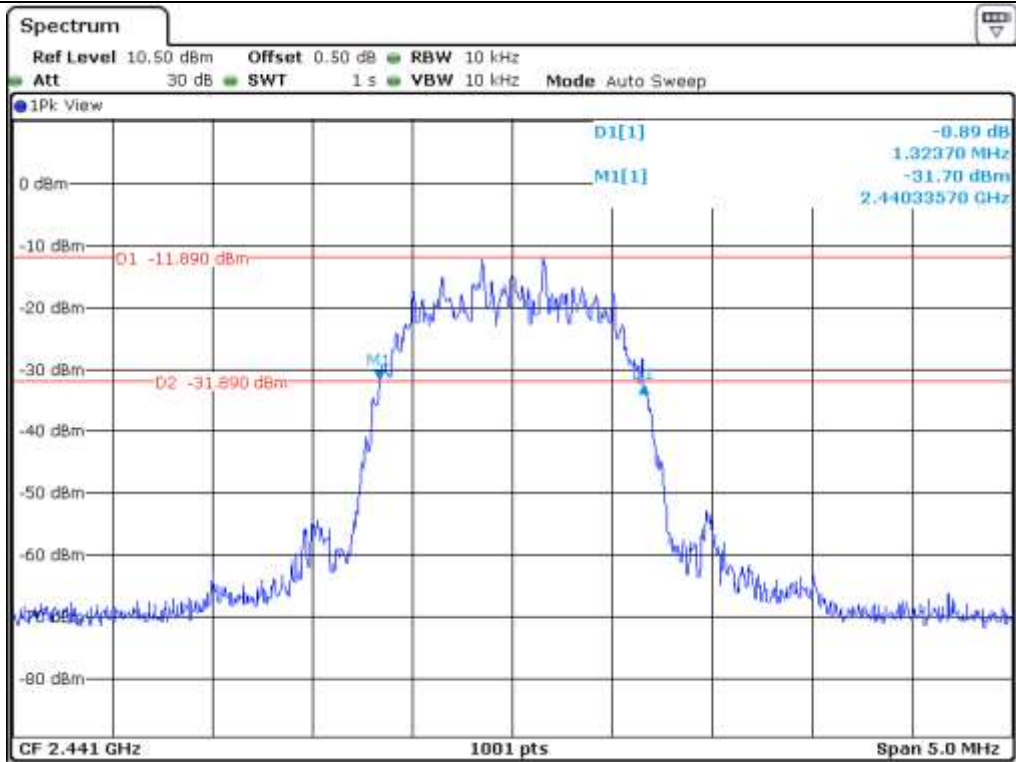

Middle Channel

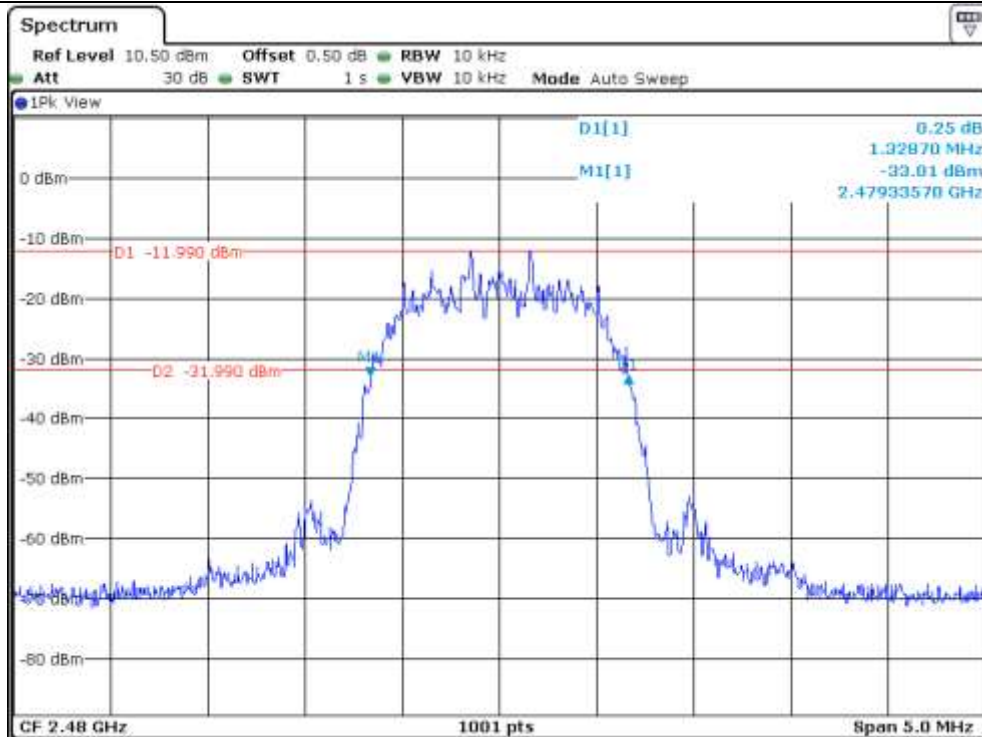


High Channel


7.6 Test data for 3 Mbps

-. Test Date : March 28, 2017


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 303.70
Middle	2 441	1 303.70
High	2 480	1 308.70

Tested by: Tae-Ho, Kim / Senior Engineer

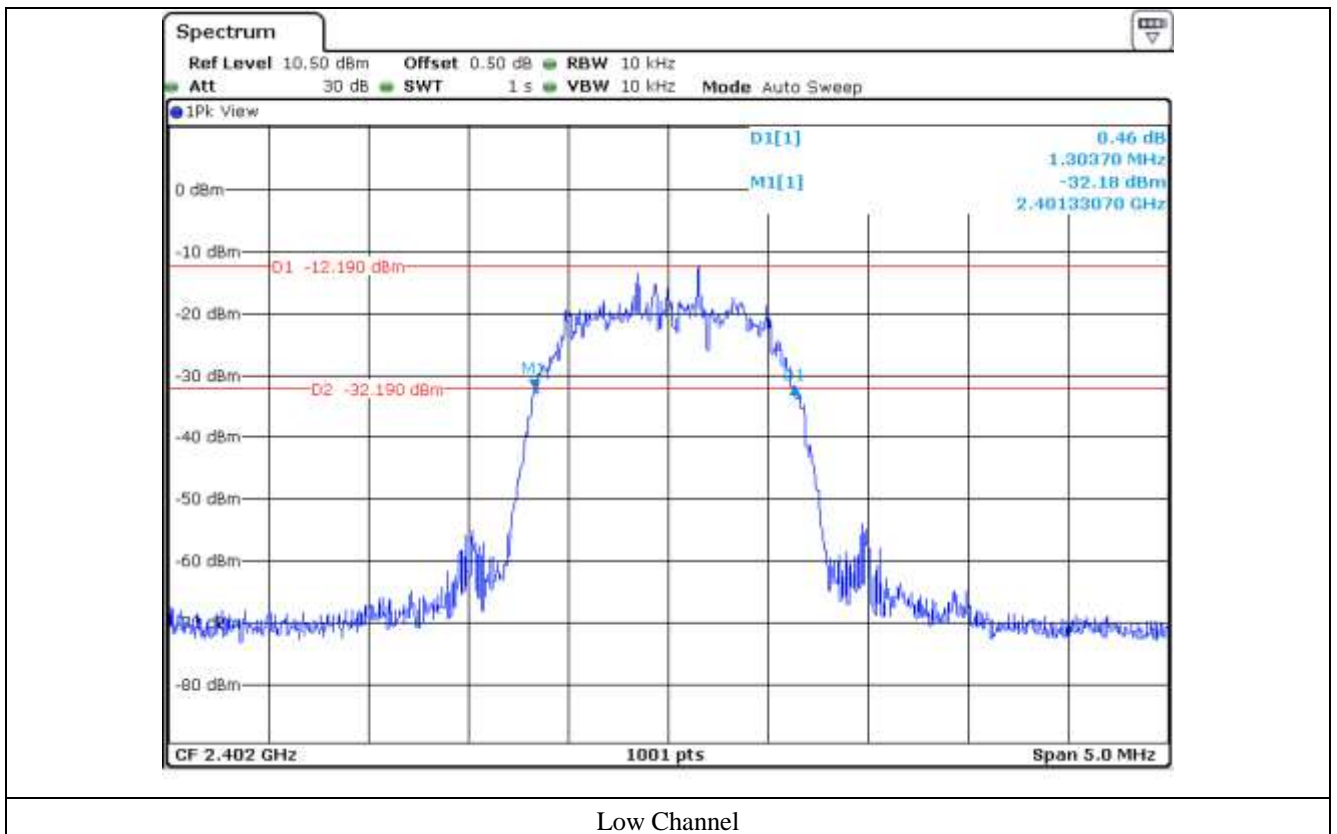

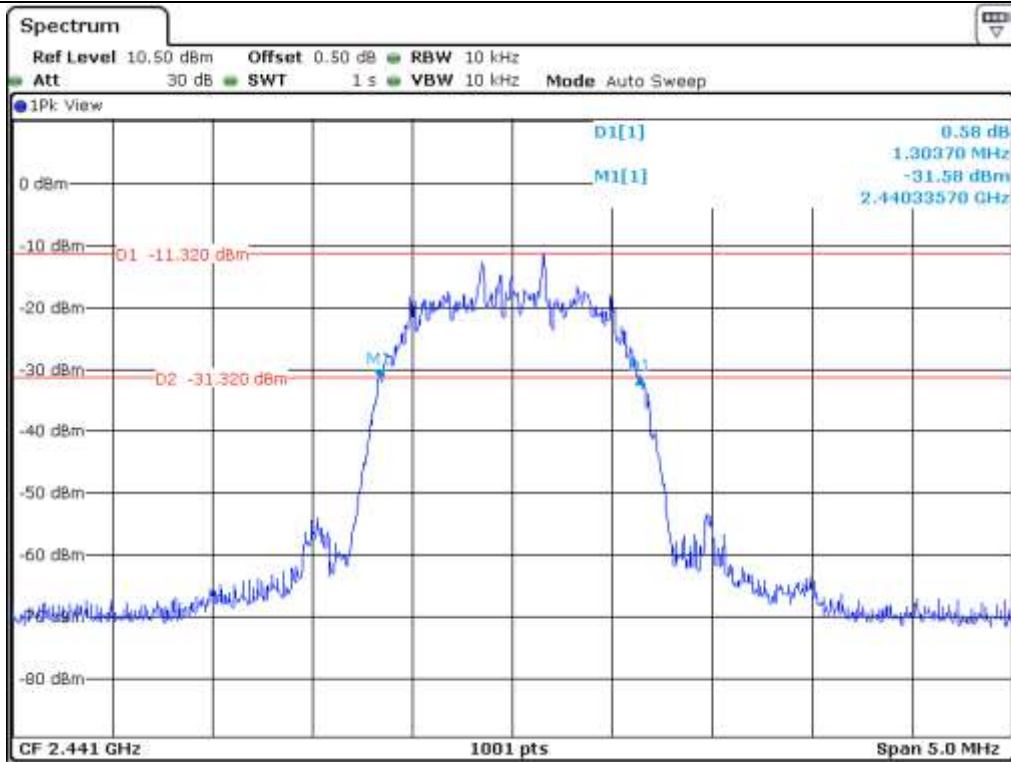

Middle Channel

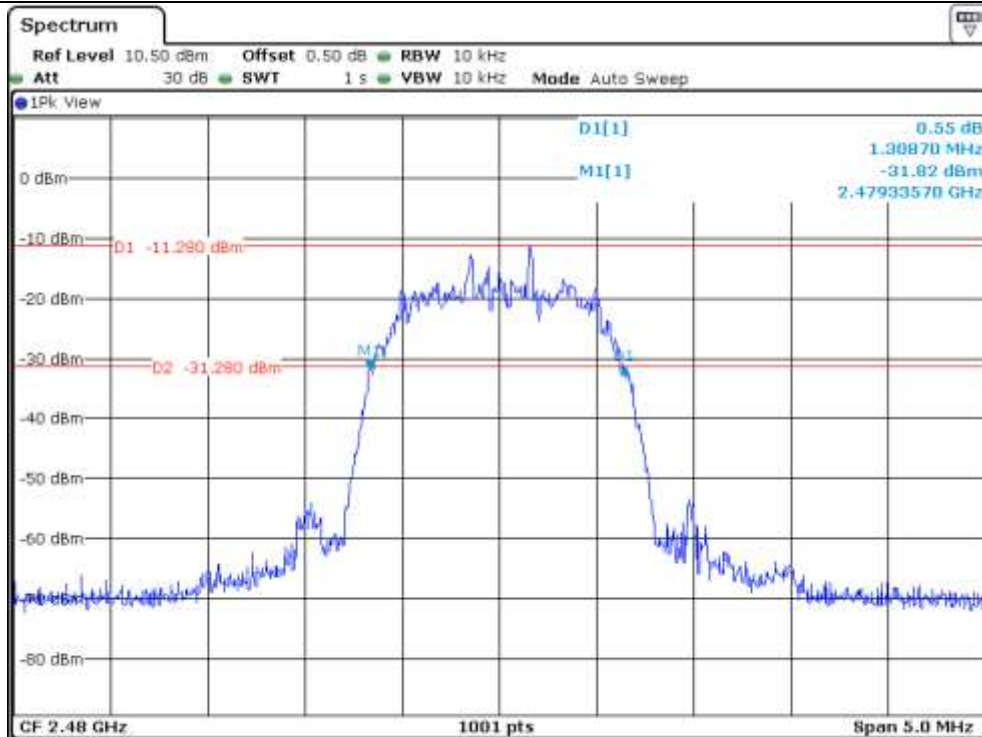

High Channel


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 22 °C
 Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

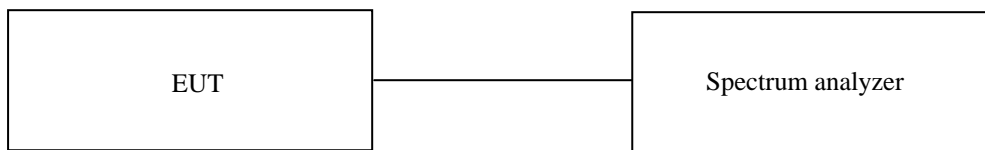

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	April 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.


8.4 Test data for 1 Mbps

- Test Date : March 28, 2017

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	616.07	Separated by a minimum of 25 kHz

Tested by: Tae-Ho, Kim / Senior Engineer

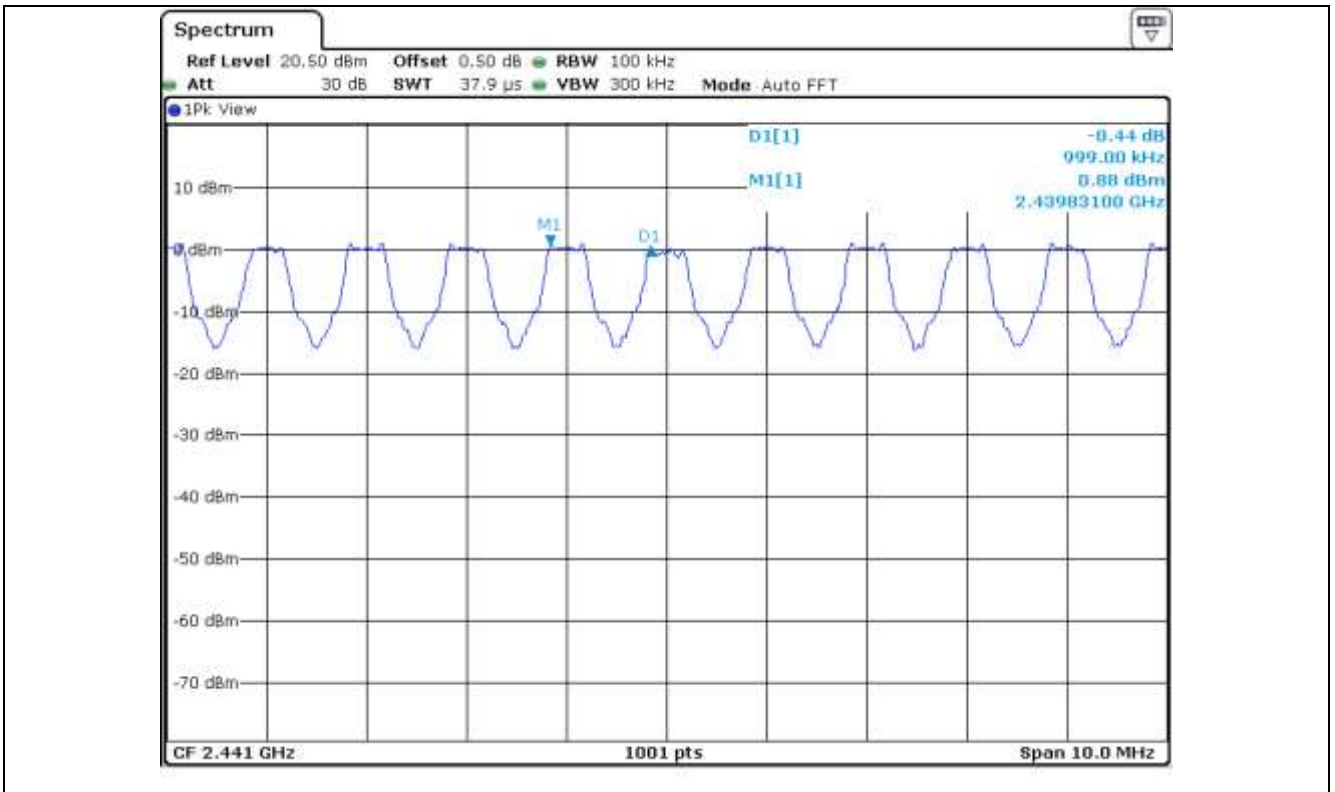


8.5 Test data for 2 Mbps

- Test Date : March 28, 2017

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	882.47	Separated by a minimum of 25 kHz

Tested by: Tae-Ho, Kim / Senior Engineer

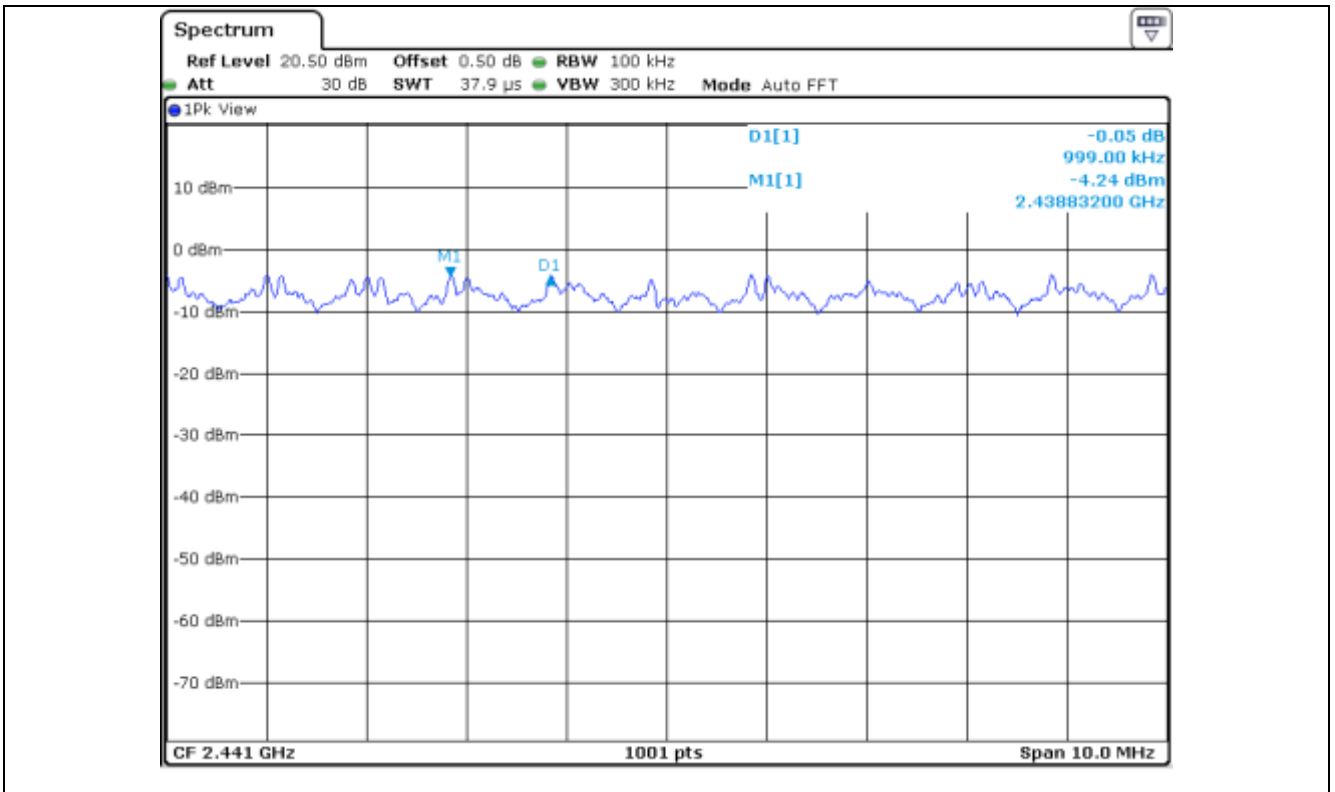


8.6 Test data for 3 Mbps

- Test Date : March 28, 2017

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	869.13	Separated by a minimum of 25 kHz

Tested by: Tae-Ho, Kim / Senior Engineer

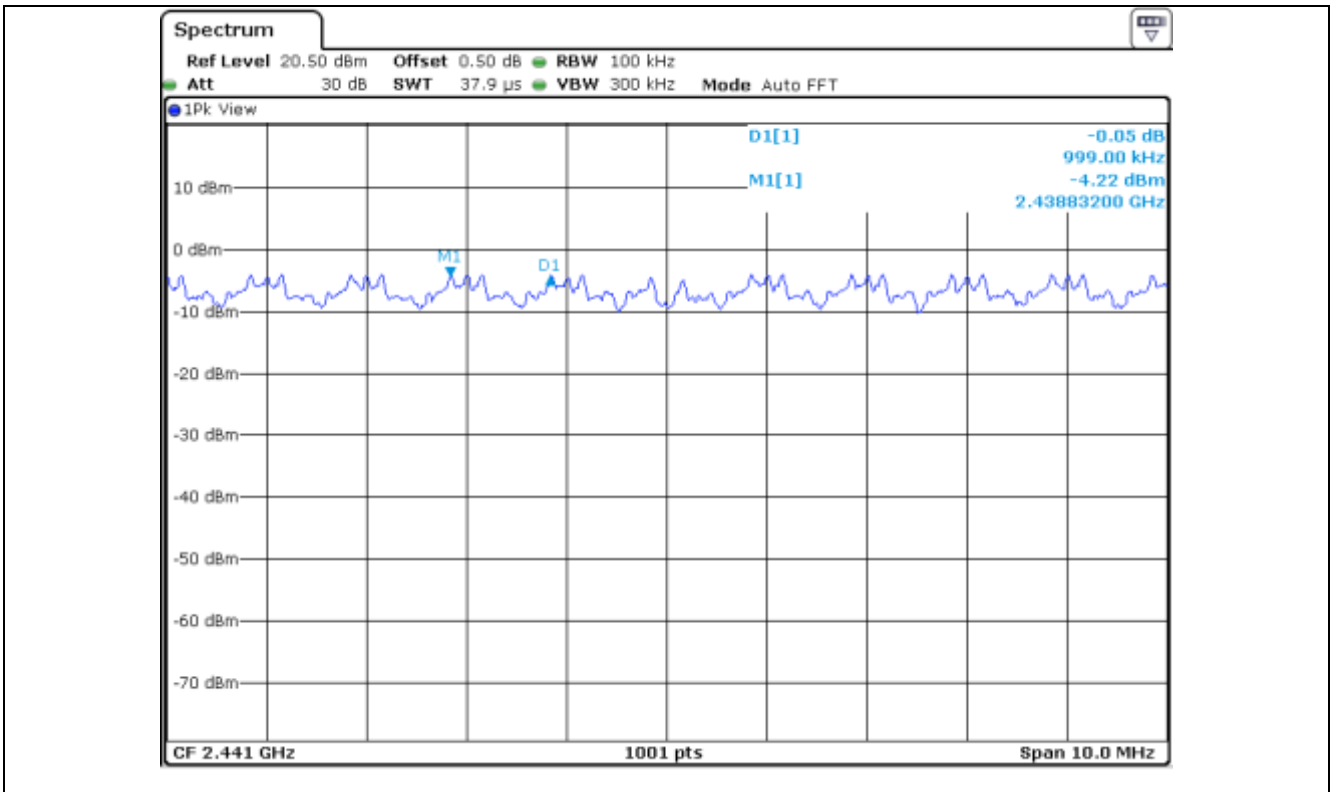


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 22 °C
 Relative humidity : 45 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 1 MHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

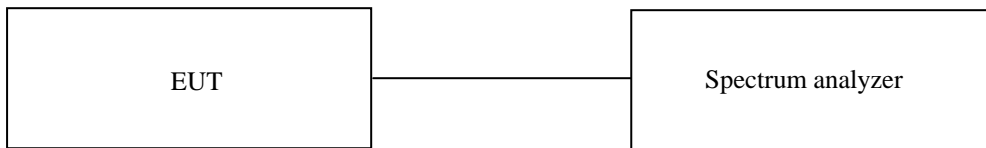

9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	April 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.


9.4 Test data for 1 Mbps


- Test Date : March 28, 2017
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64




Tested by: Tae-Ho, Kim / Senior Engineer

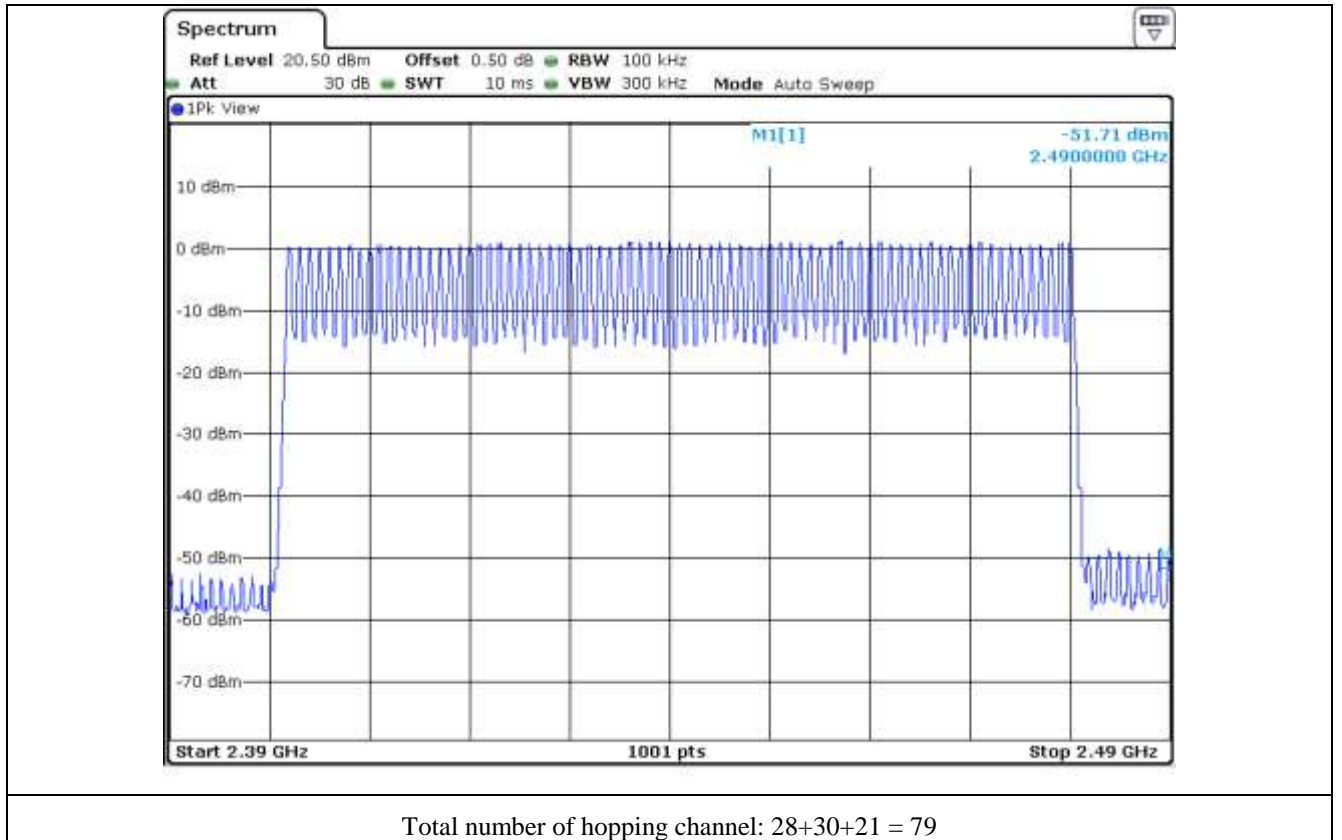


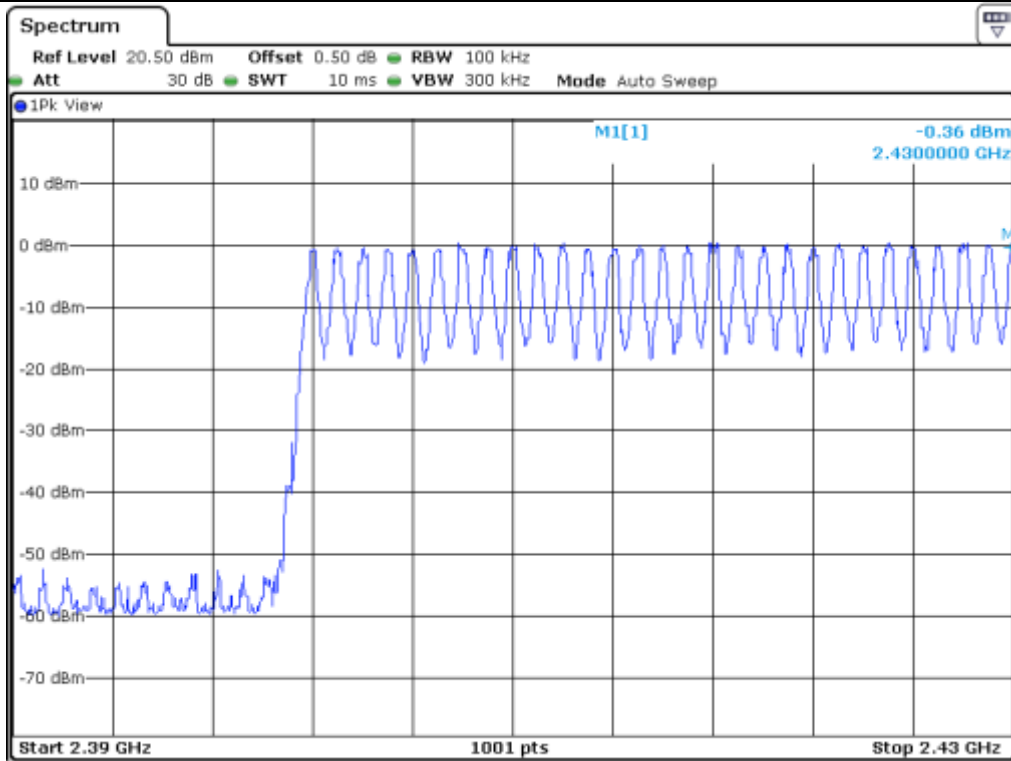

Number of hopping channel: 28

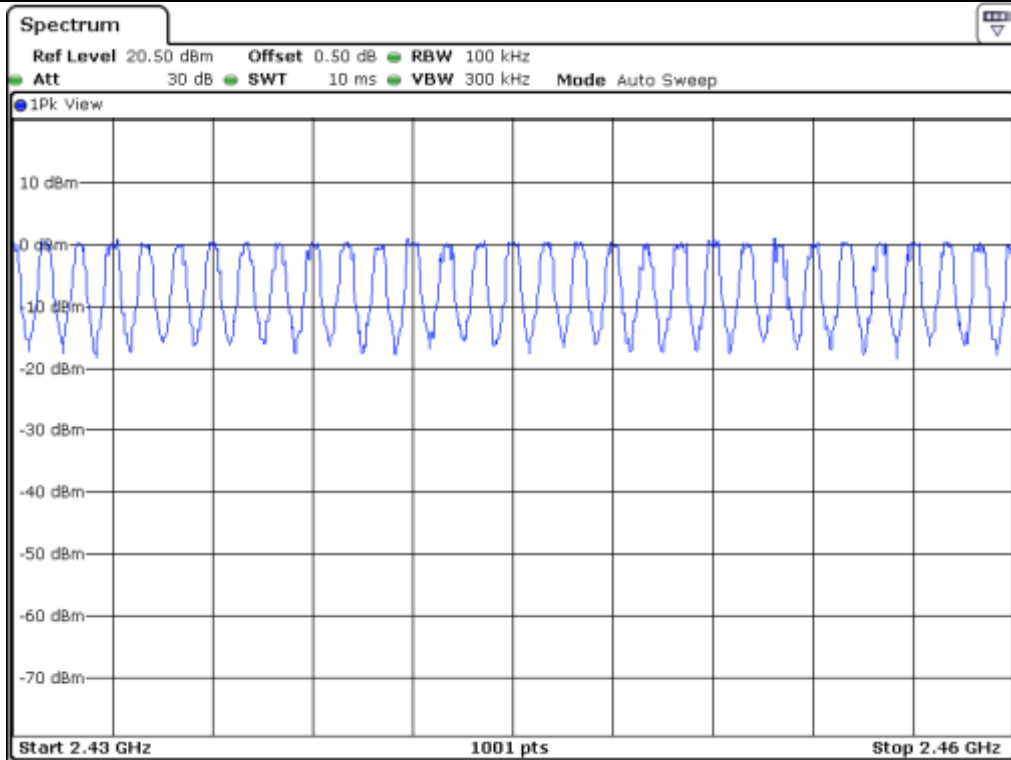

Number of hopping channel: 30

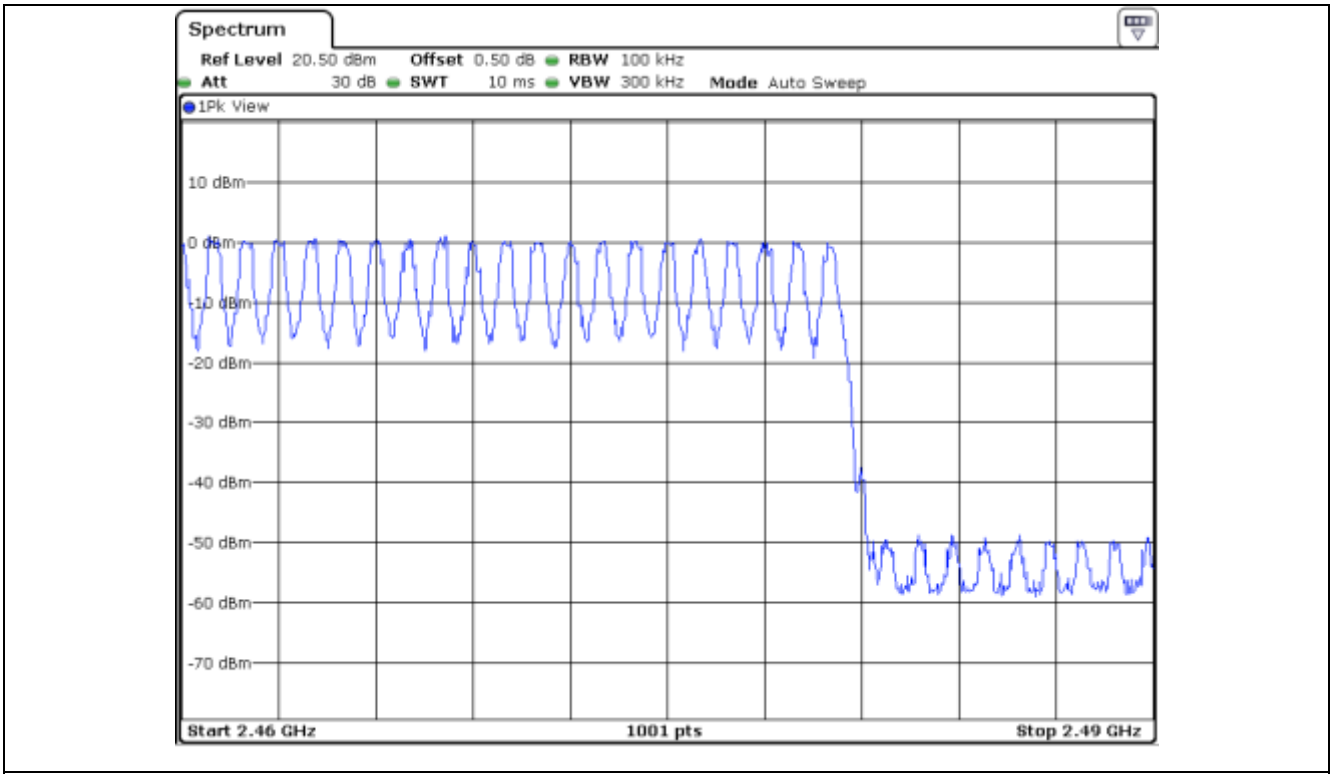


Number of hopping channel: 21


9.5 Test data for 2 Mbps

- Test Date : March 28, 2017
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

Tested by: Tae-Ho, Kim / Senior Engineer

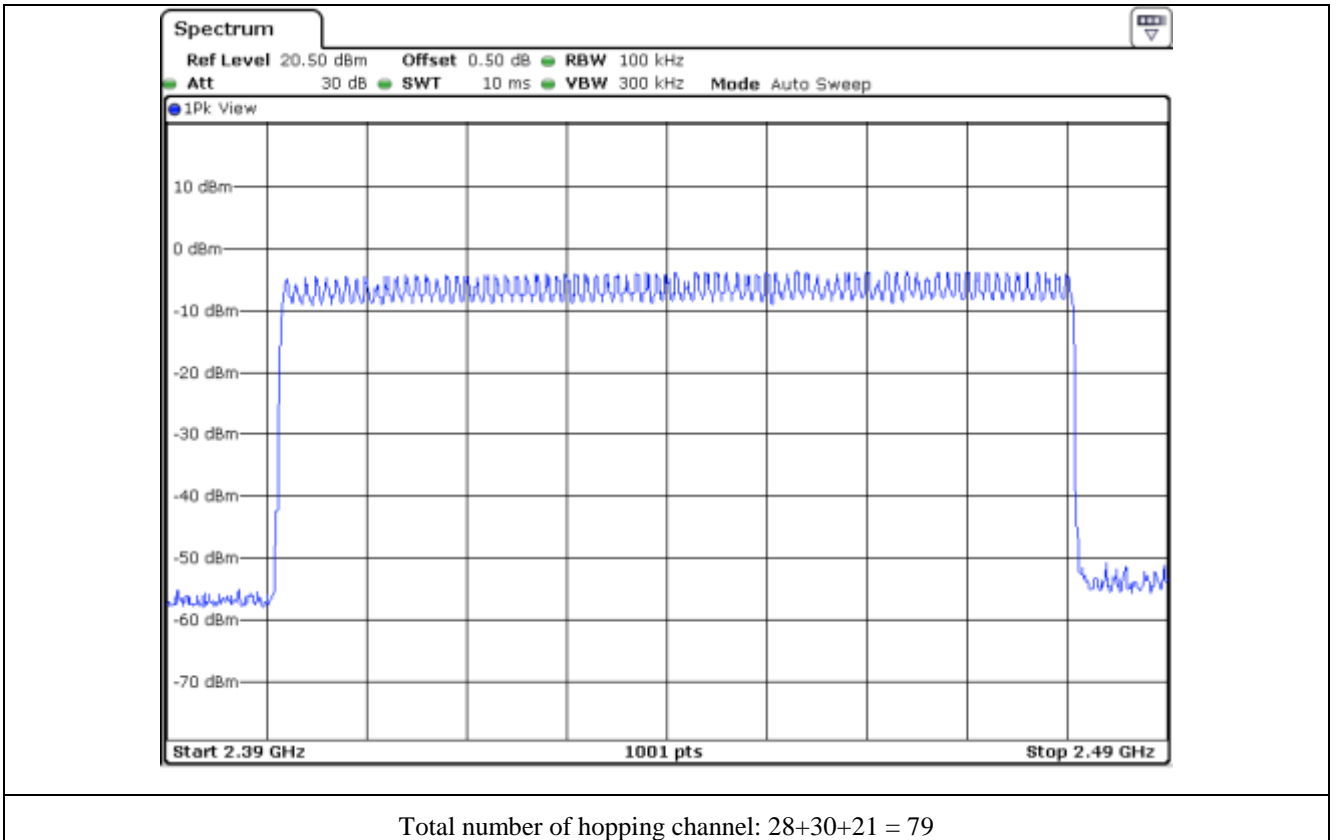


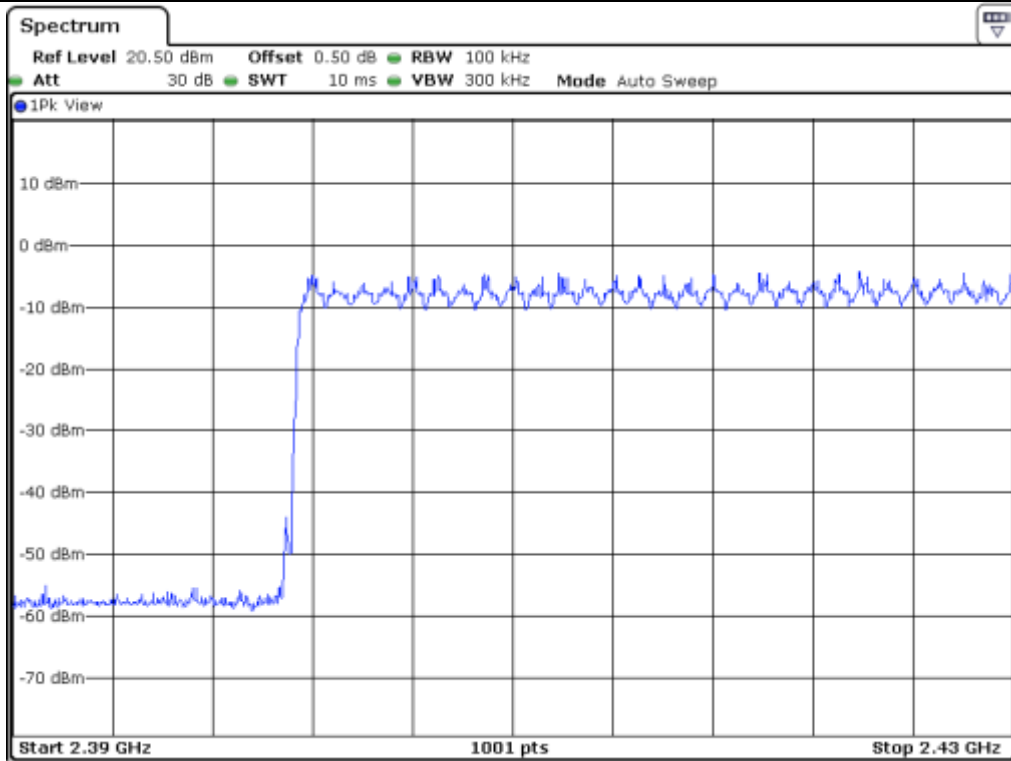

Number of hopping channel: 28

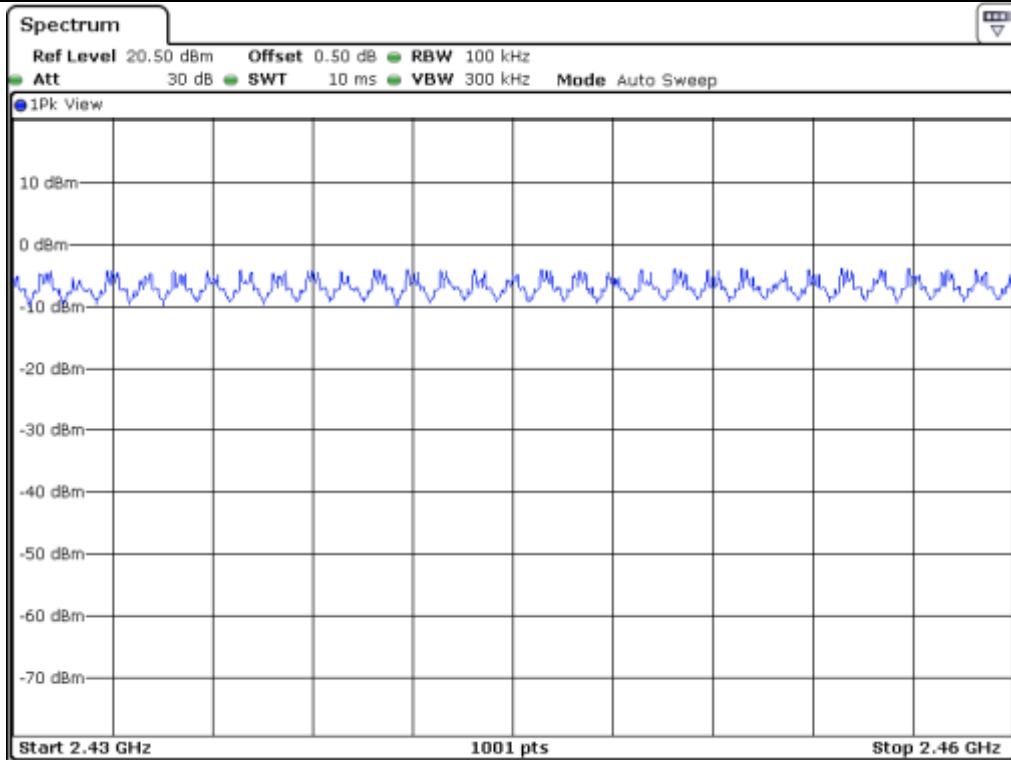

Number of hopping channel: 30

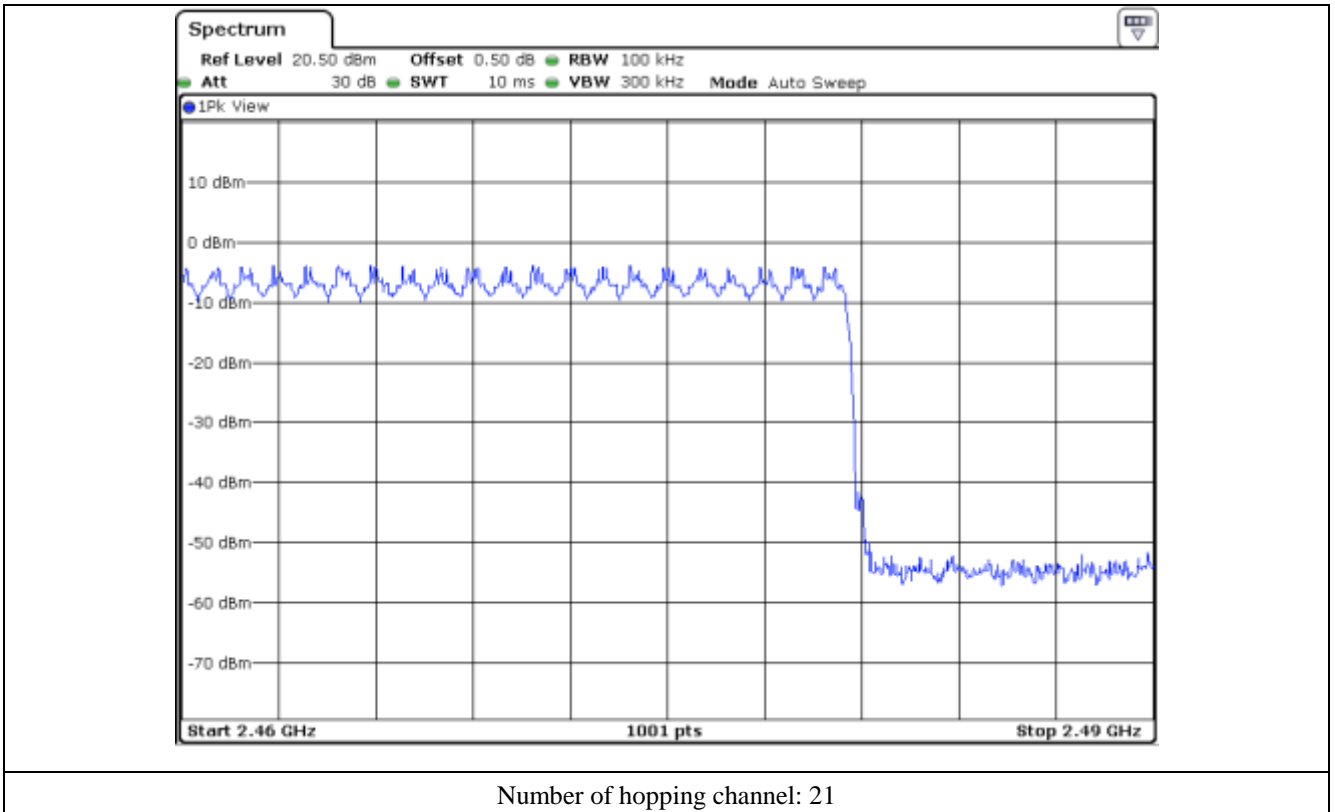



9.6 Test data for 3 Mbps

- Test Date : March 28, 2017
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64

Tested by: Tae-Ho, Kim / Senior Engineer

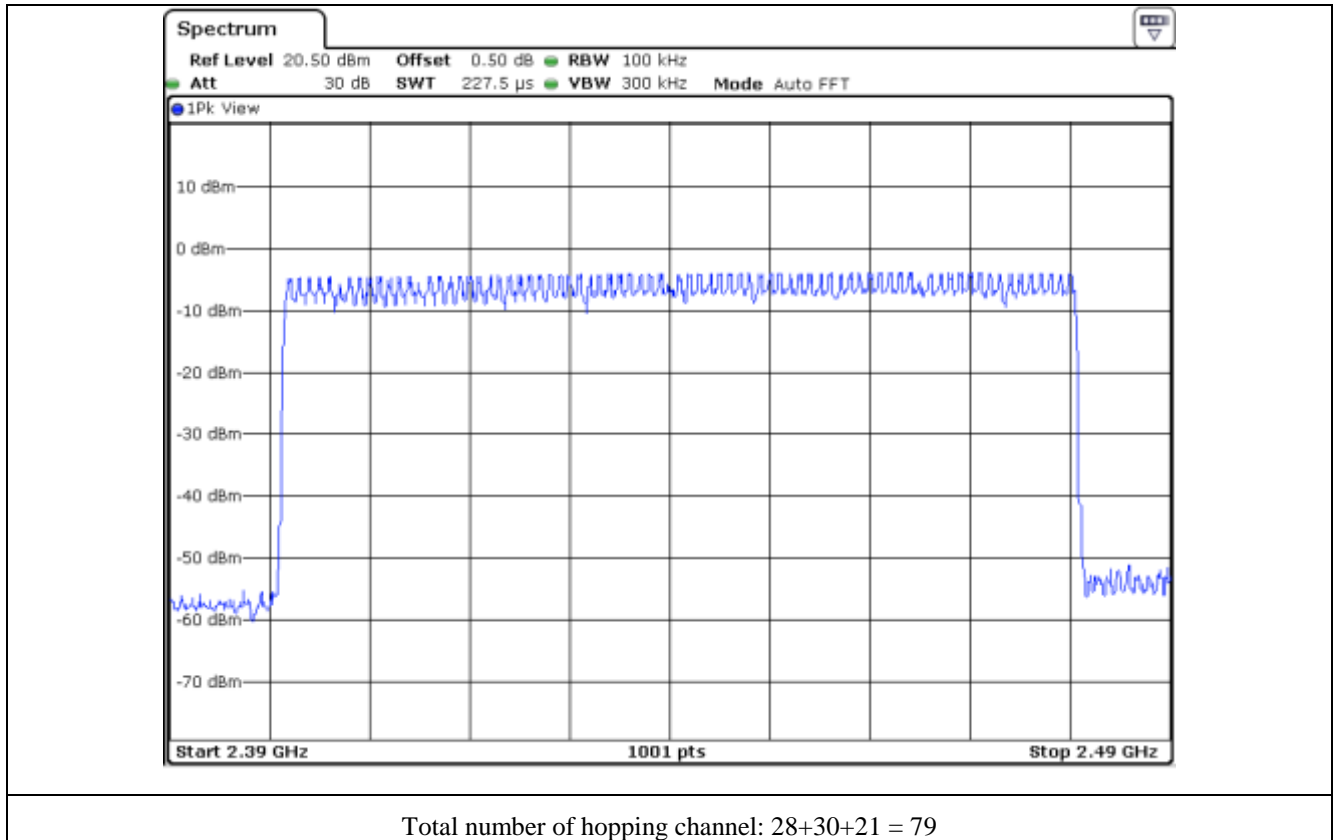


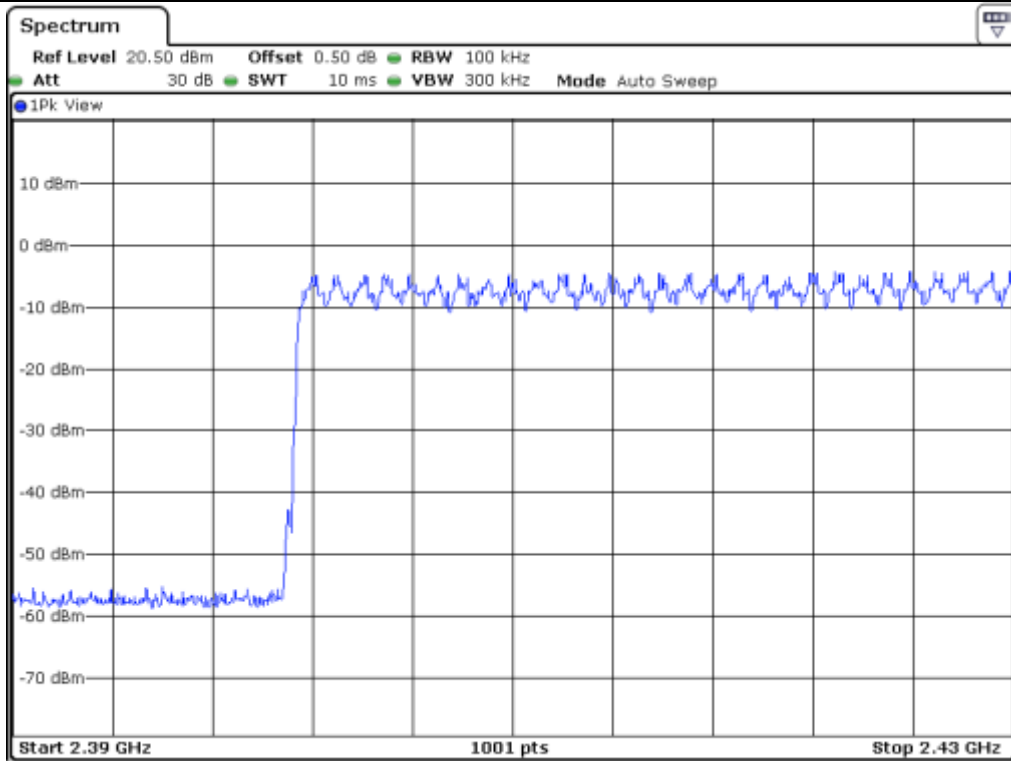

Number of hopping channel: 28

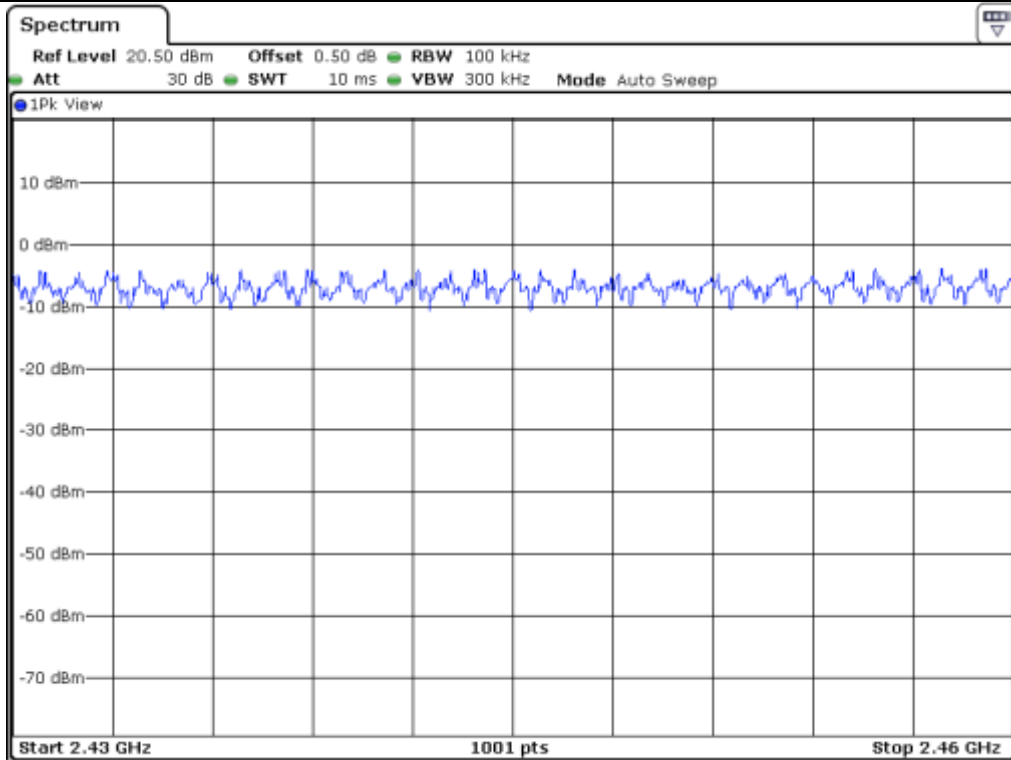

Number of hopping channel: 30

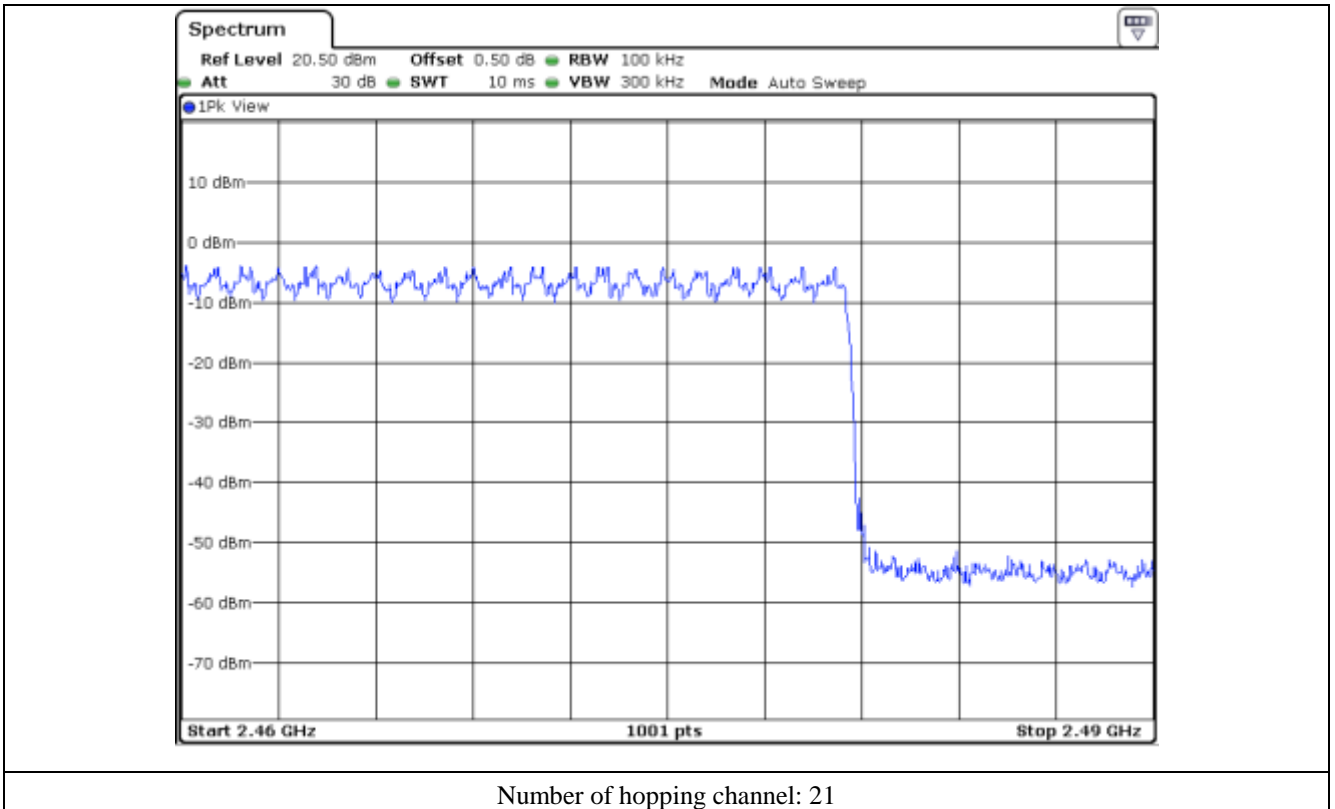


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 22 °C
 Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

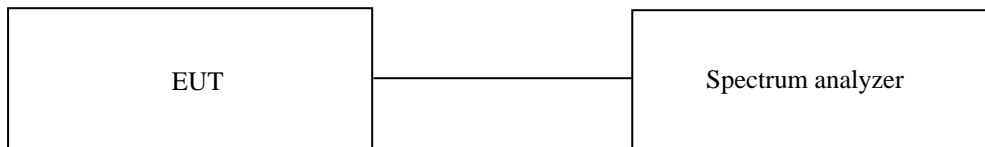

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	April 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data for 1 Mbps

- Test Date : March 28, 2017

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.370	10.13	31.6	118.44	400	PASS
DH3	1.640	5.06	31.6	262.23	400	
DH5	2.890	3.38	31.6	308.68	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Tae-Ho, Kim / Senior Engineer

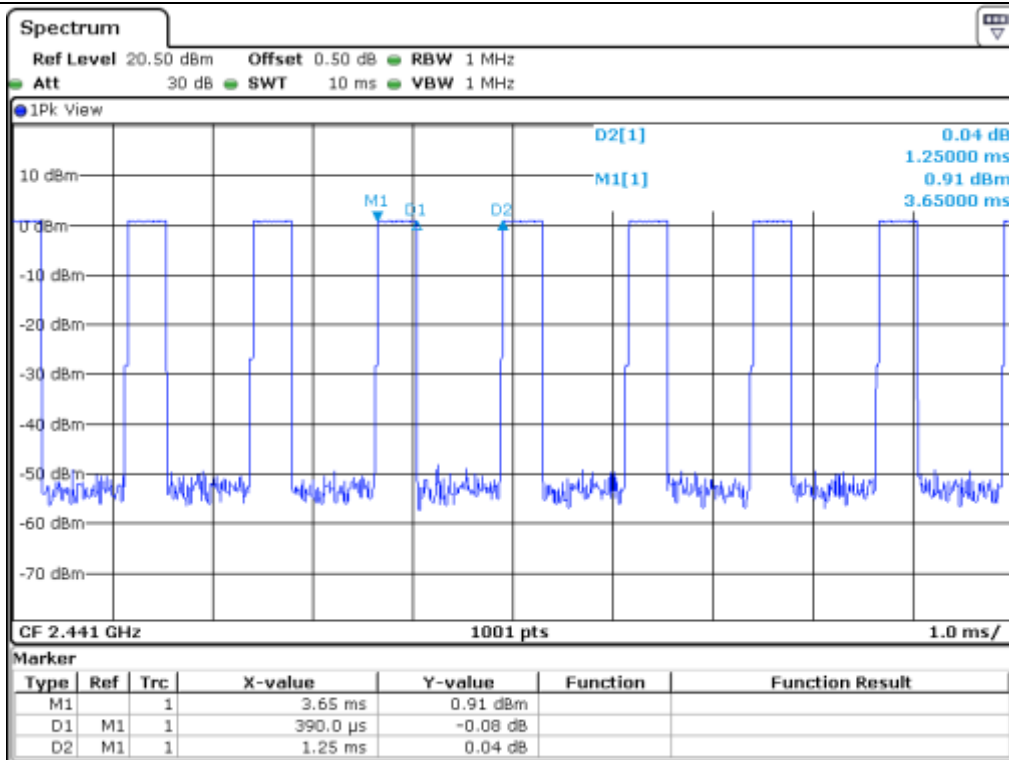

DH1

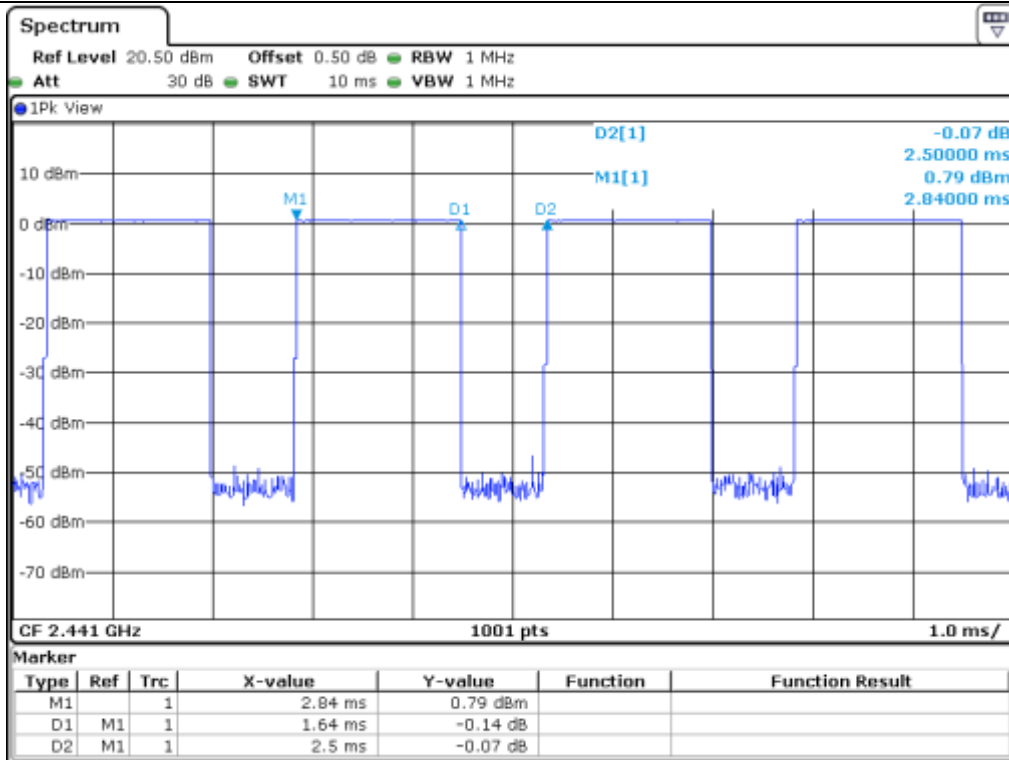

DH3

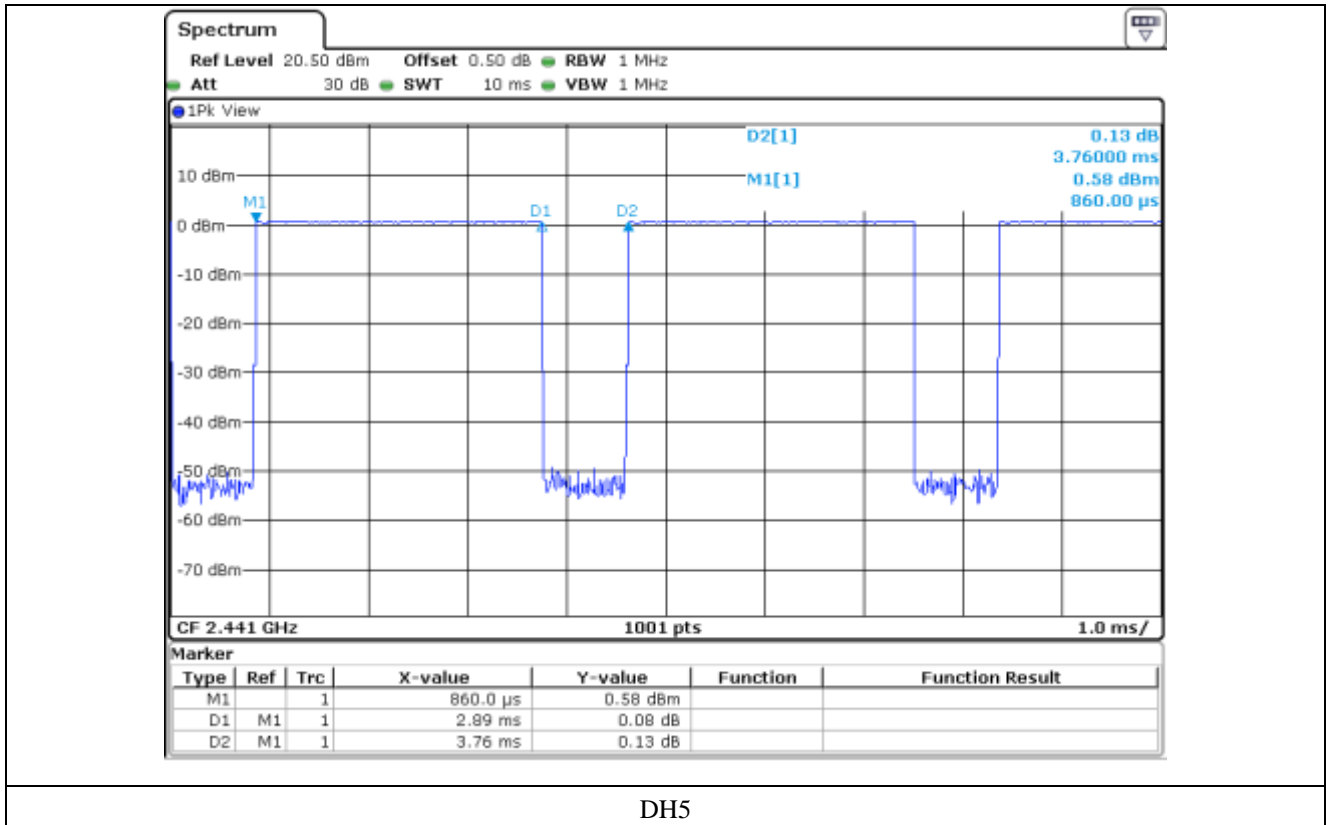

DH5

10.5 Test data for 2 Mbps

- Test Date : March 28, 2017

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.390	10.13	31.6	124.84	400	PASS
DH3	1.640	5.06	31.6	262.23	400	
DH5	2.880	3.38	31.6	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Tae-Ho, Kim / Senior Engineer

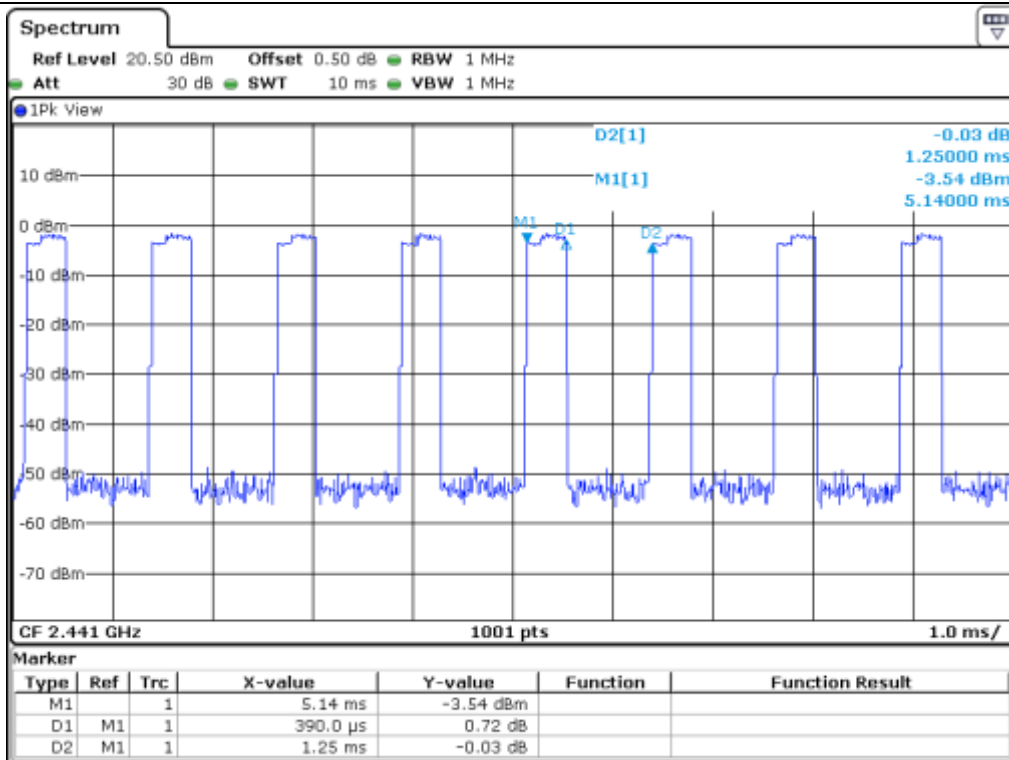

DH1

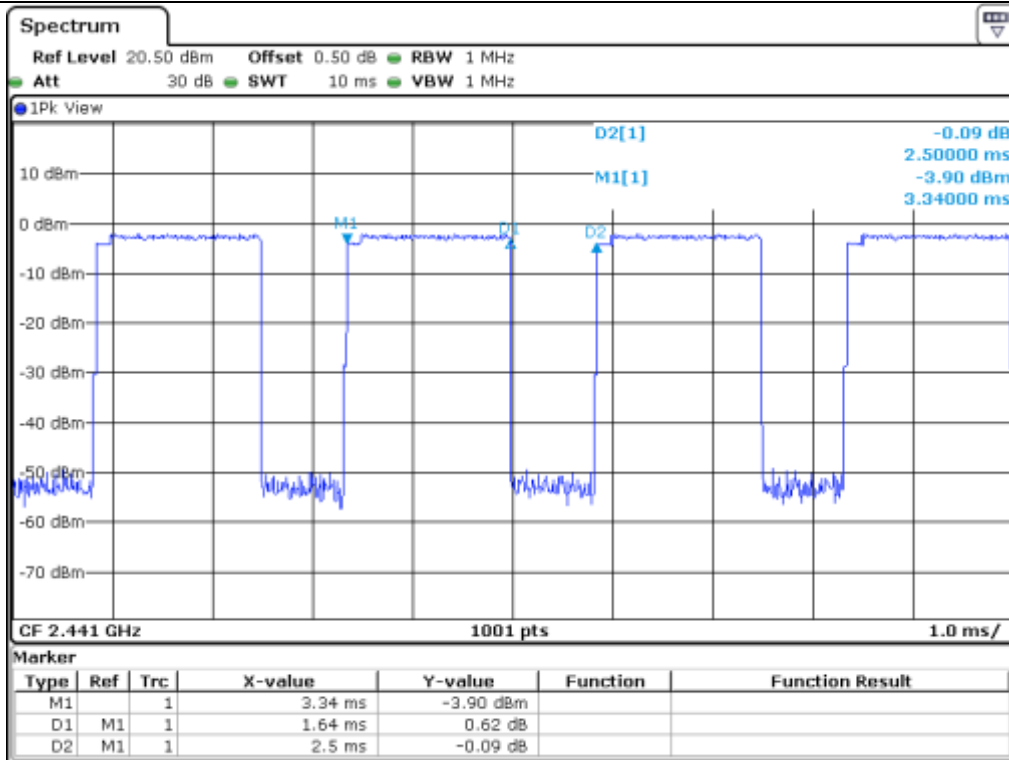

DH3

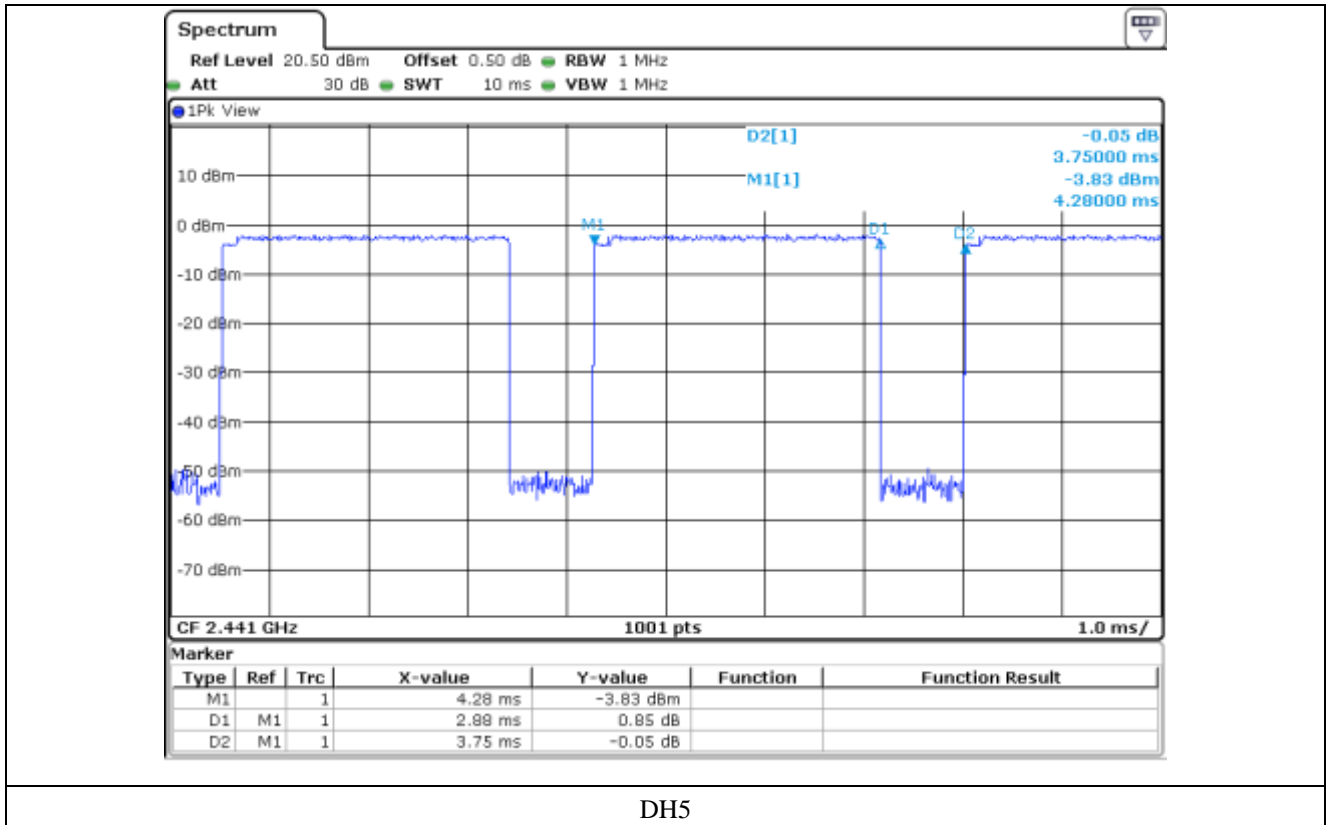

DH5

10.6 Test data for 3 Mbps

- Test Date : March 28, 2017

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.390	10.13	31.6	124.84	400	PASS
DH3	1.640	5.06	31.6	262.23	400	
DH5	2.900	3.38	31.6	309.74	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Tae-Ho, Kim / Senior Engineer

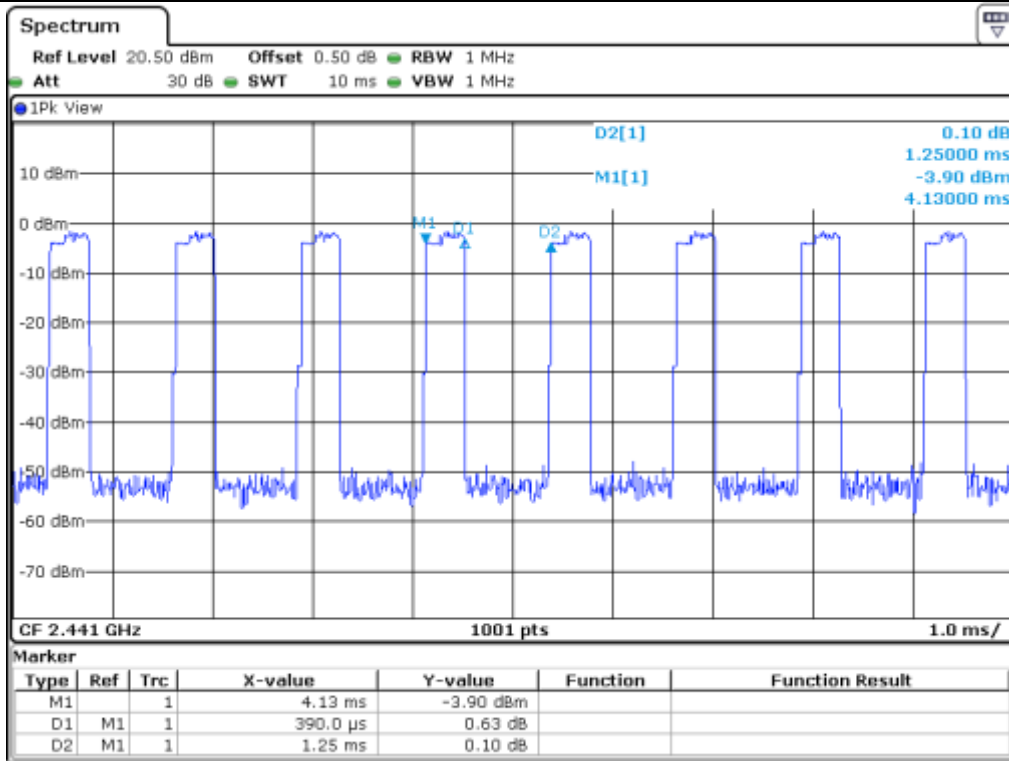

DH1

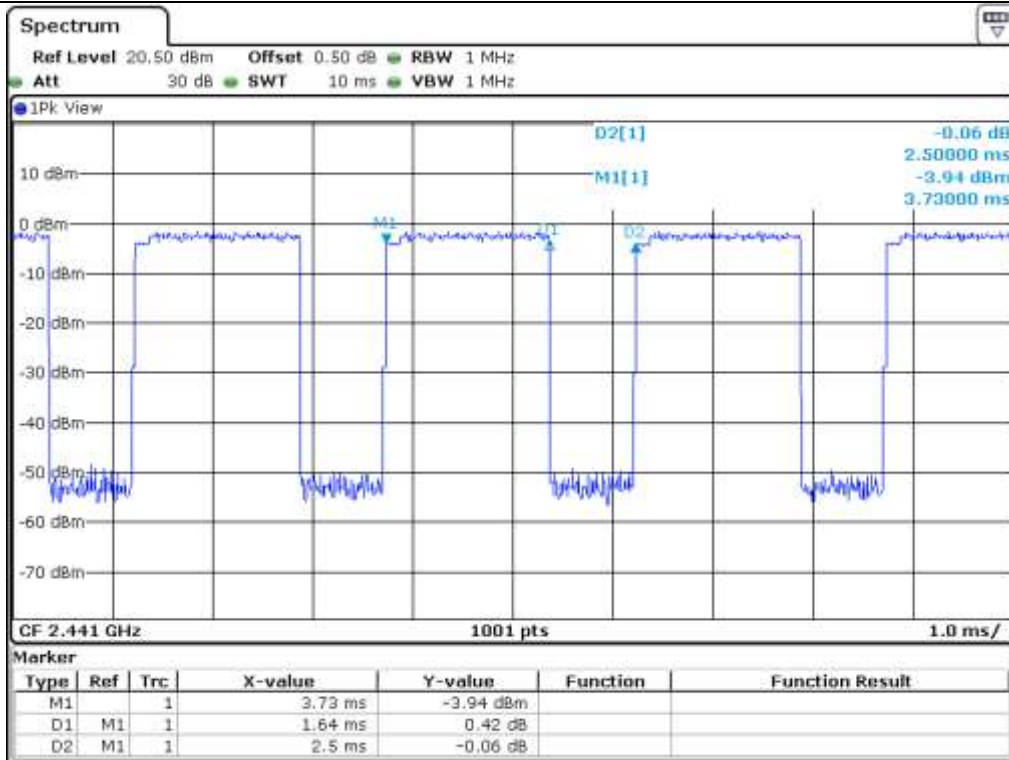

DH3

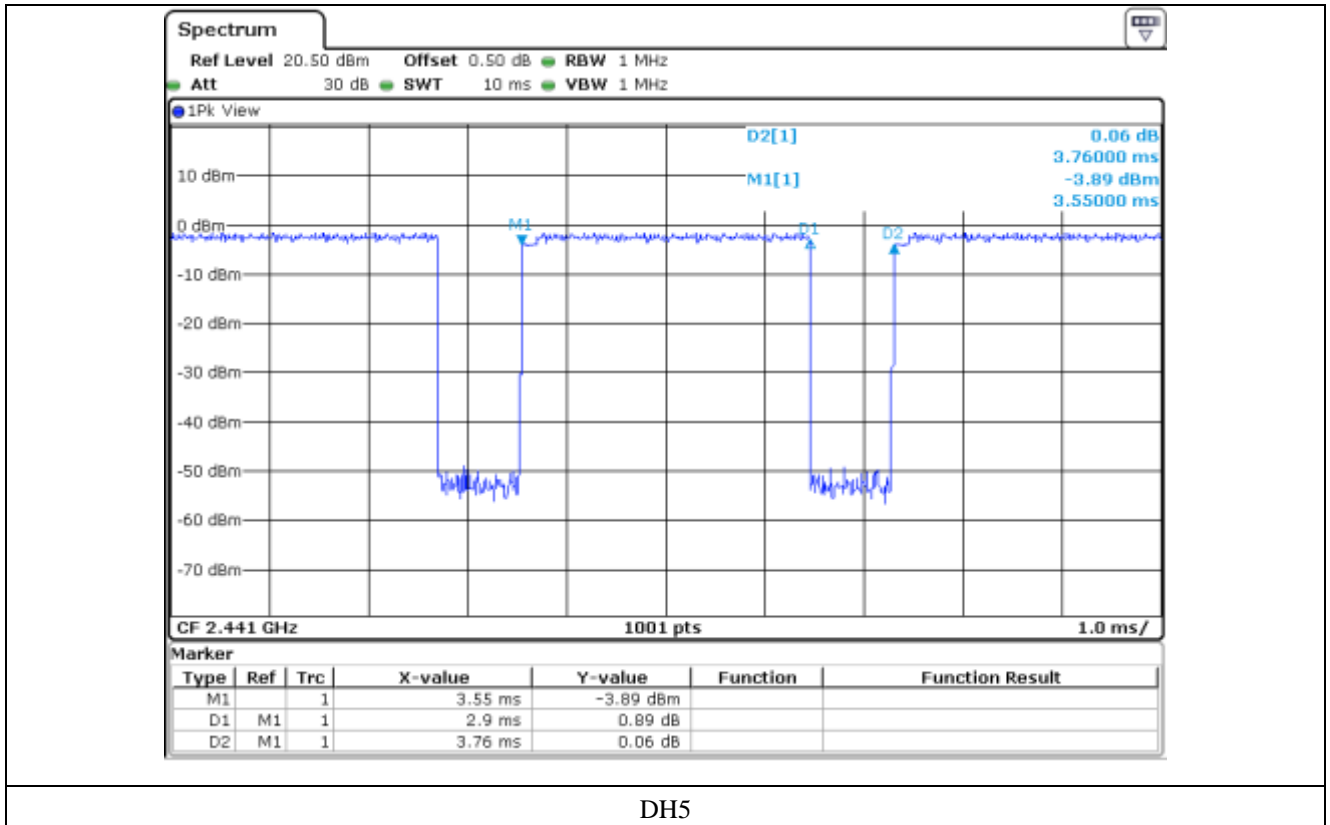

DH5

11. MAXIMUM PEAK OUTPUT POWER


11.1 Operating environment

Temperature : 22 °C
 Relative humidity : 45 % R.H

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

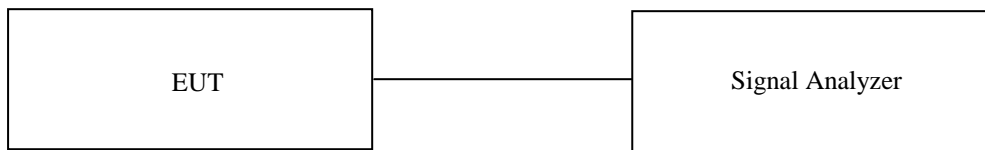

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	April 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for 1 Mbps


- Test Date : March 28, 2017


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	0.20	21.00	20.80
MIDDLE	2 441.00	0.97	21.00	20.03
HIGH	2 480.00	0.74	21.00	20.26


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Tae-Ho, Kim / Senior Engineer

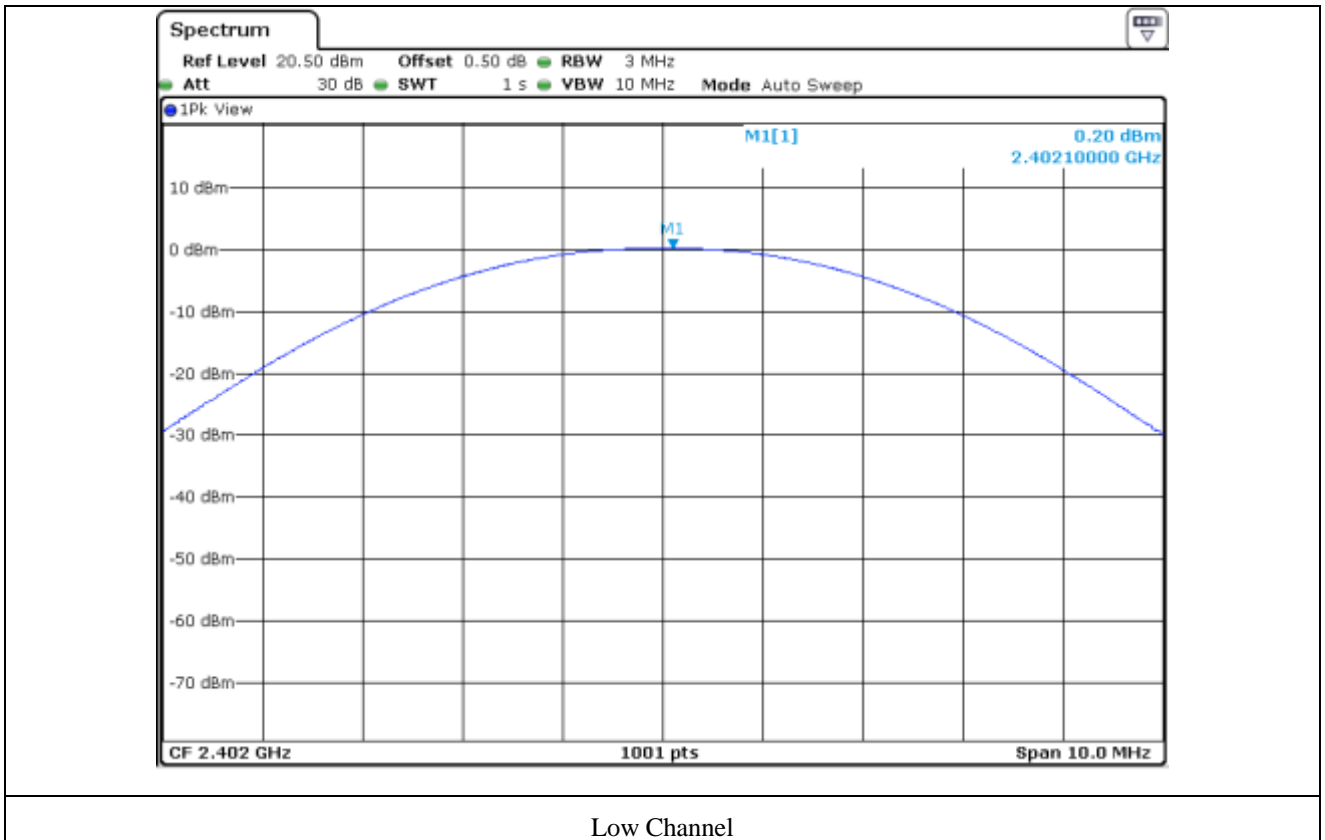

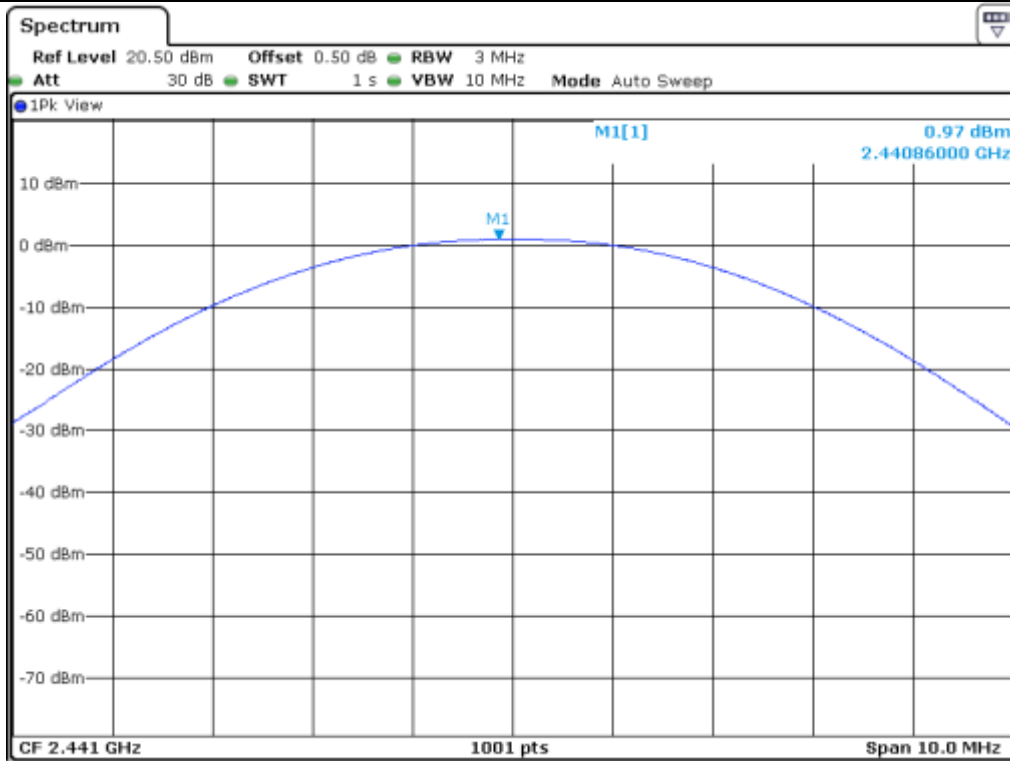

Middle Channel

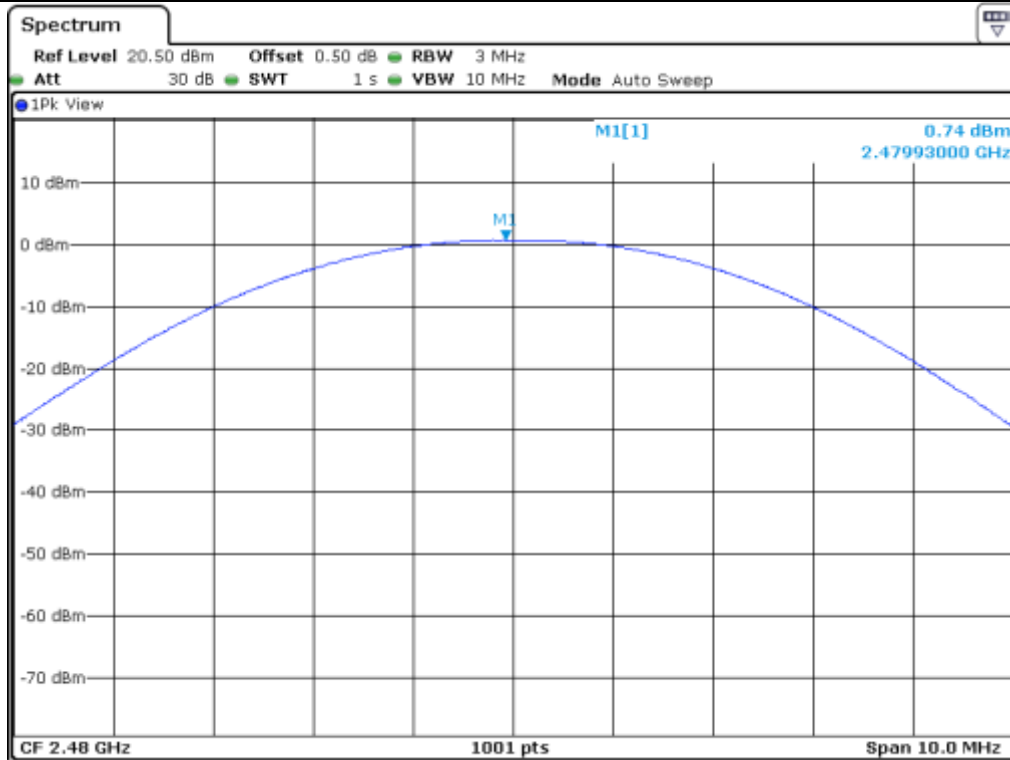

High Channel

11.5 Test data for 2 Mbps


- Test Date : March 28, 2017

- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-2.39	21.00	23.39
MIDDLE	2 441.00	-1.67	21.00	22.67
HIGH	2 480.00	-1.72	21.00	22.72

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


Tested by: Tae-Ho, Kim / Senior Engineer

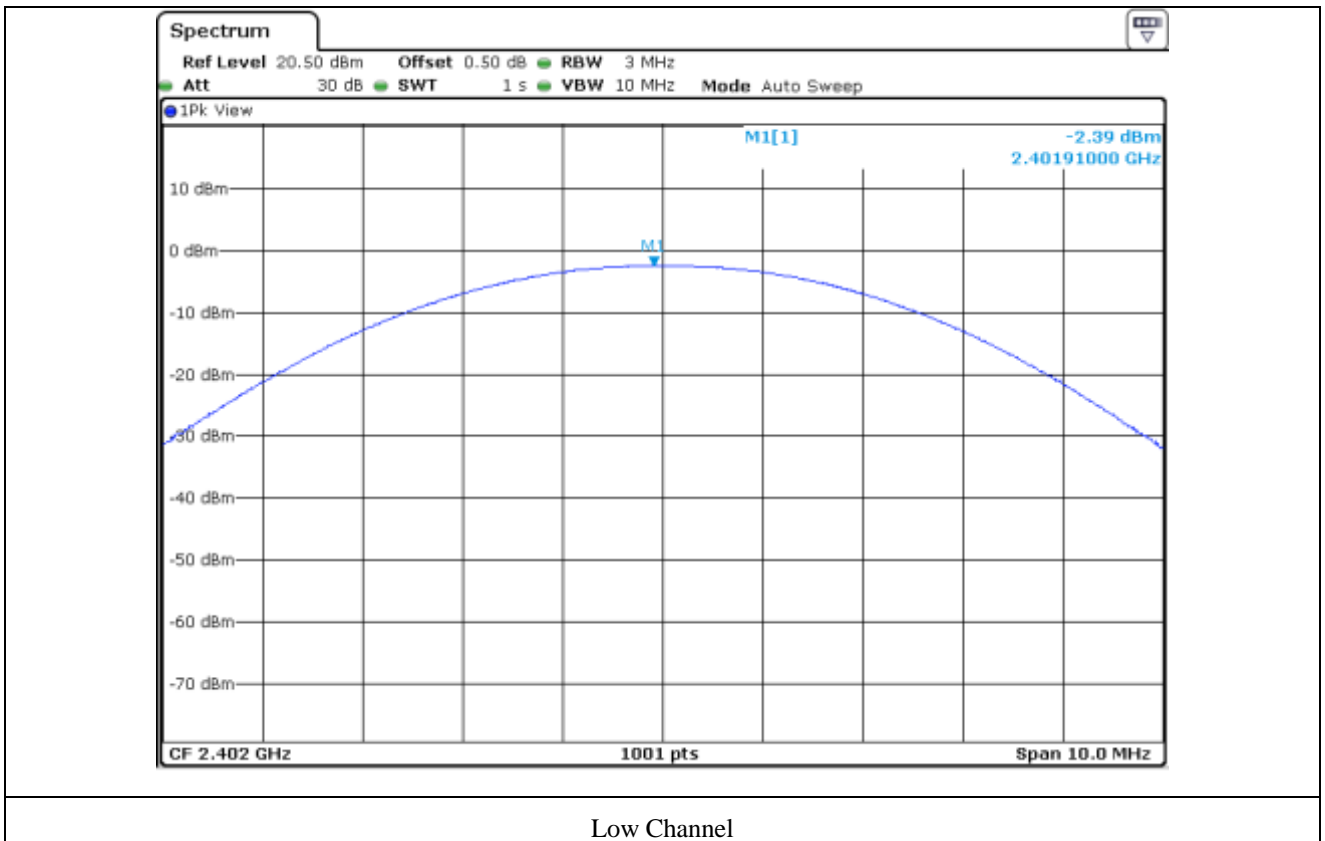

Low Channel

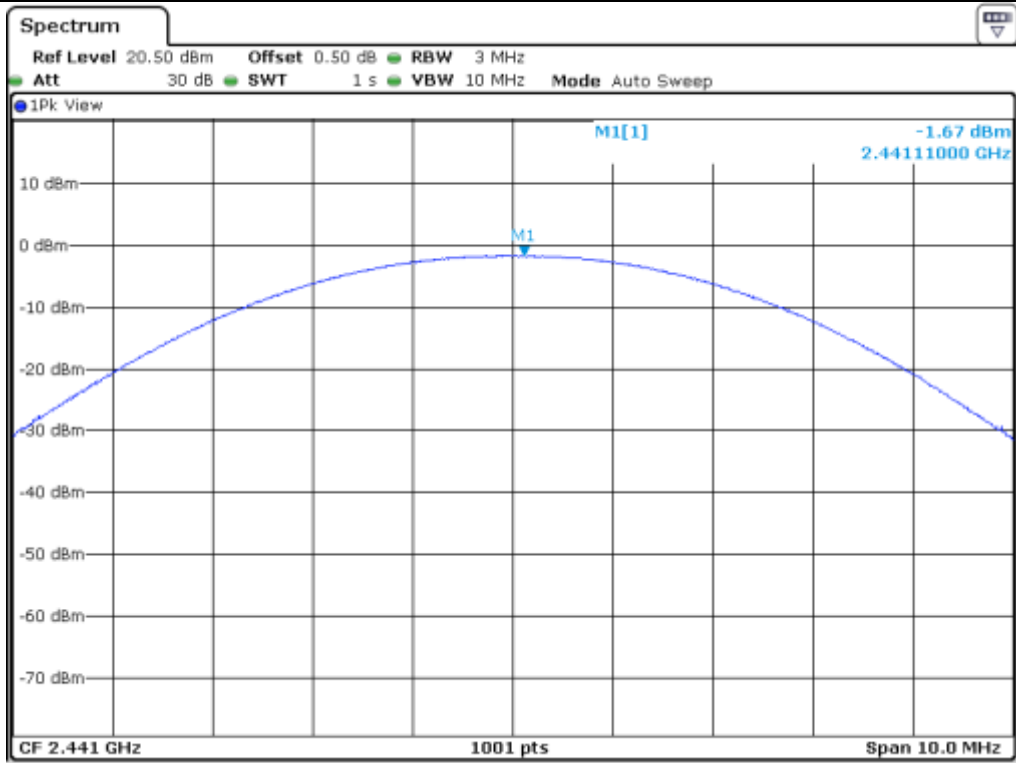

Middle Channel

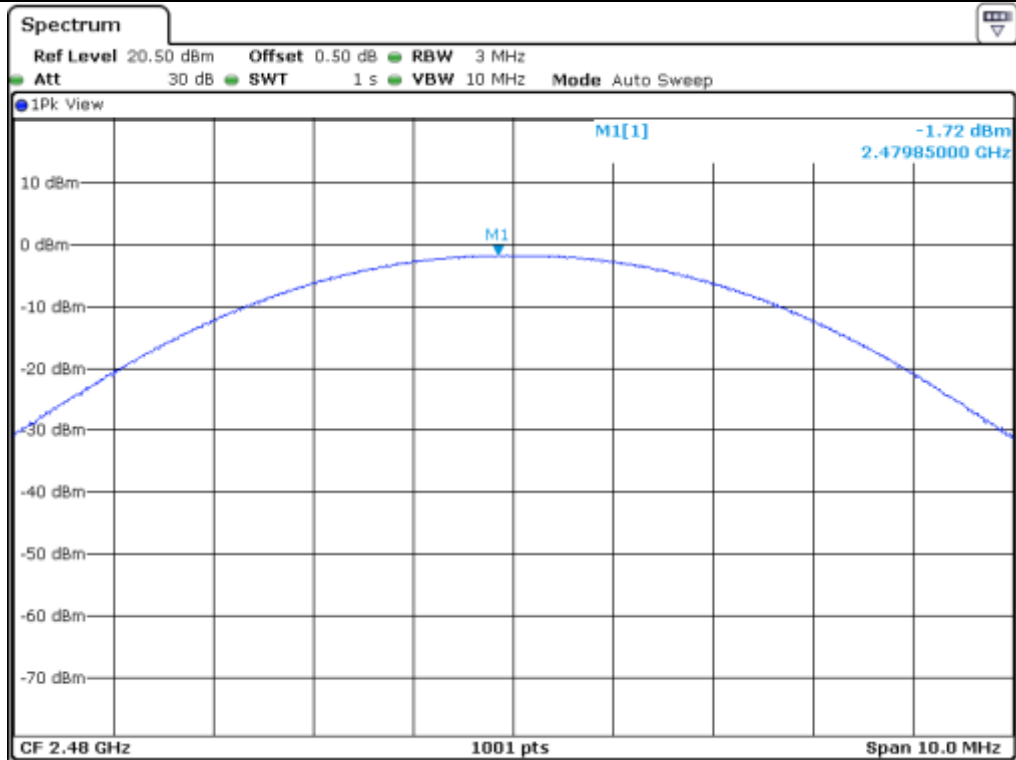

High Channel

11.6 Test data for 3 Mbps


- Test Date : March 28, 2017


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-2.01	21.00	23.01
MIDDLE	2 441.00	-1.24	21.00	22.24
HIGH	2 480.00	-1.25	21.00	22.25


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Tae-Ho, Kim / Senior Engineer

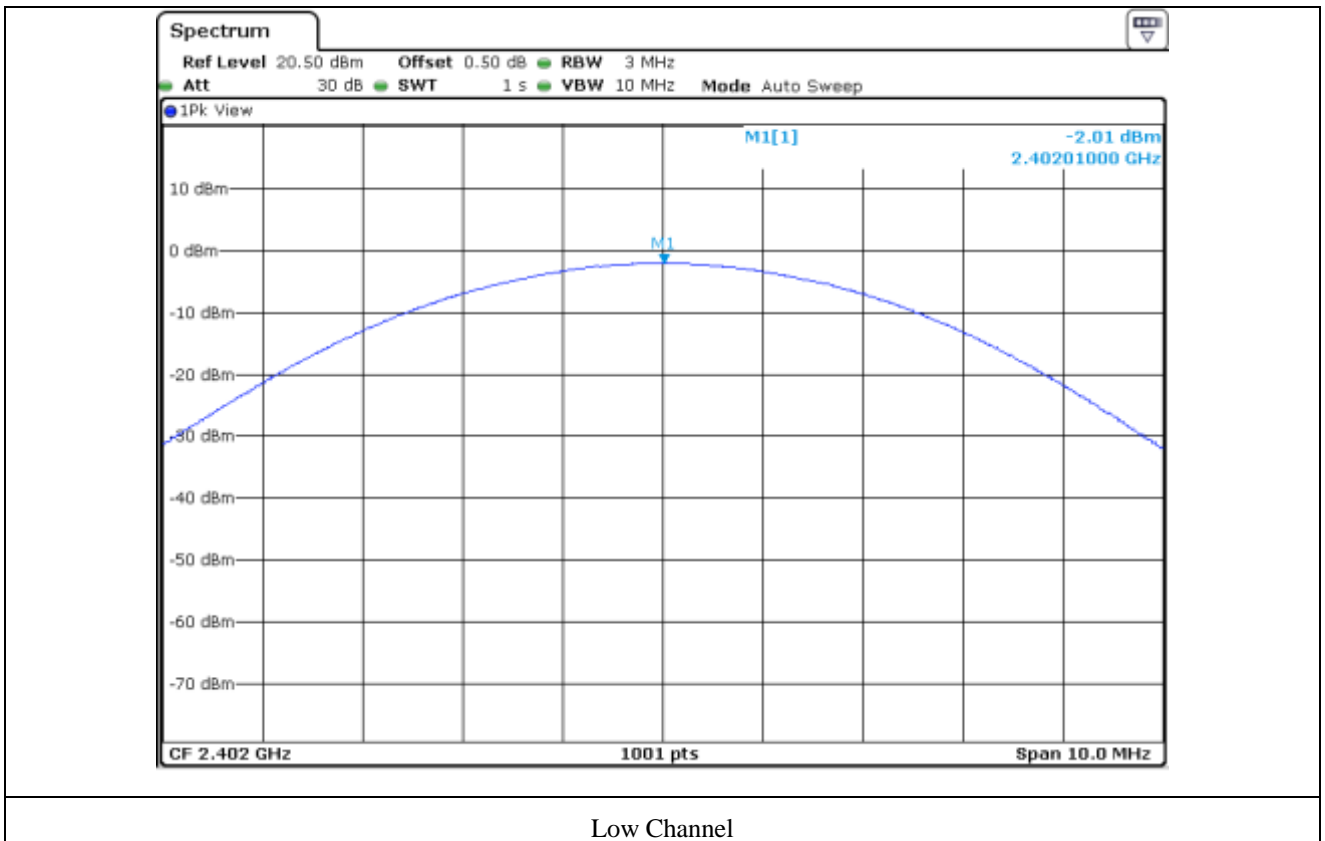

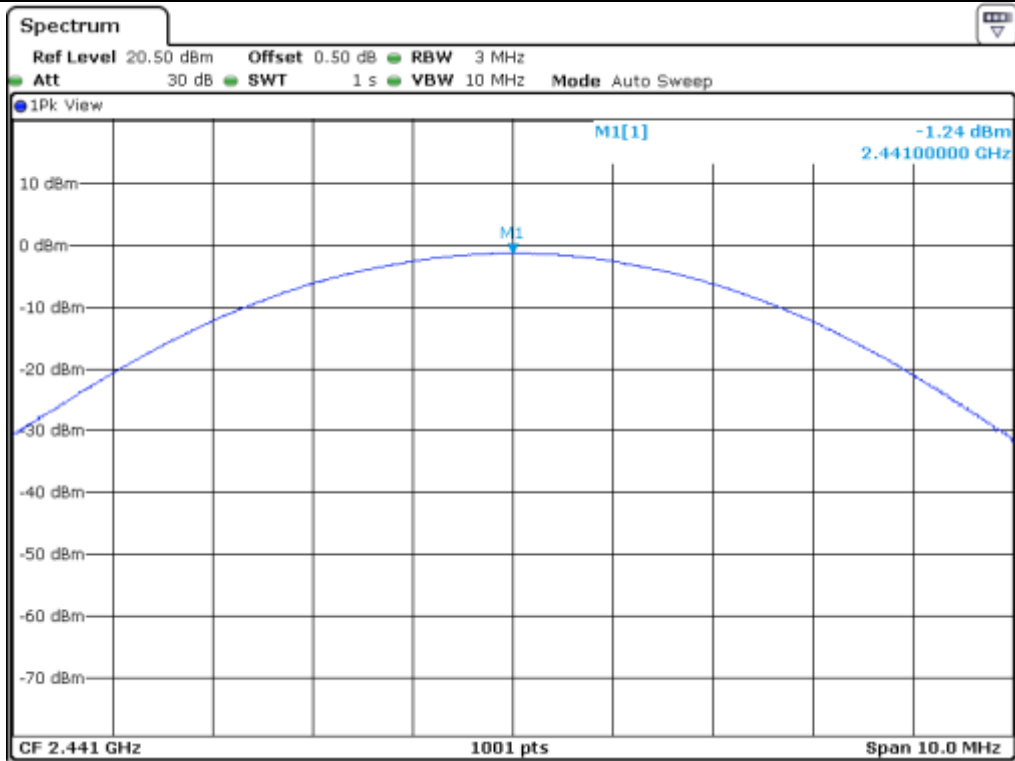

Middle Channel

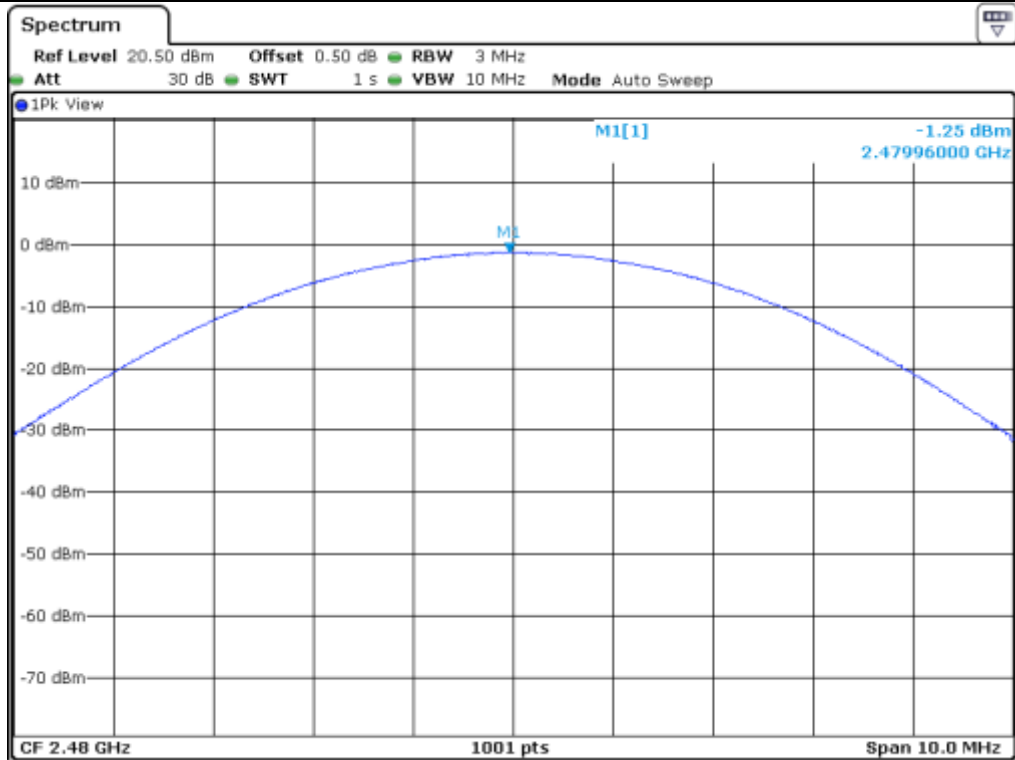

High Channel


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 21 °C
 Relative humidity : 45 % R.H

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

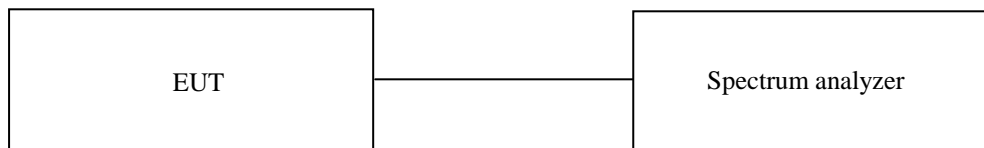

12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


12.4 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	April 05, 2017 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 06, 2017 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2017 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	102209	May 31, 2016 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	May 31, 2016 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (1Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Aug. 31, 2015 (2Y)


All test equipment used is calibrated on a regular basis.

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

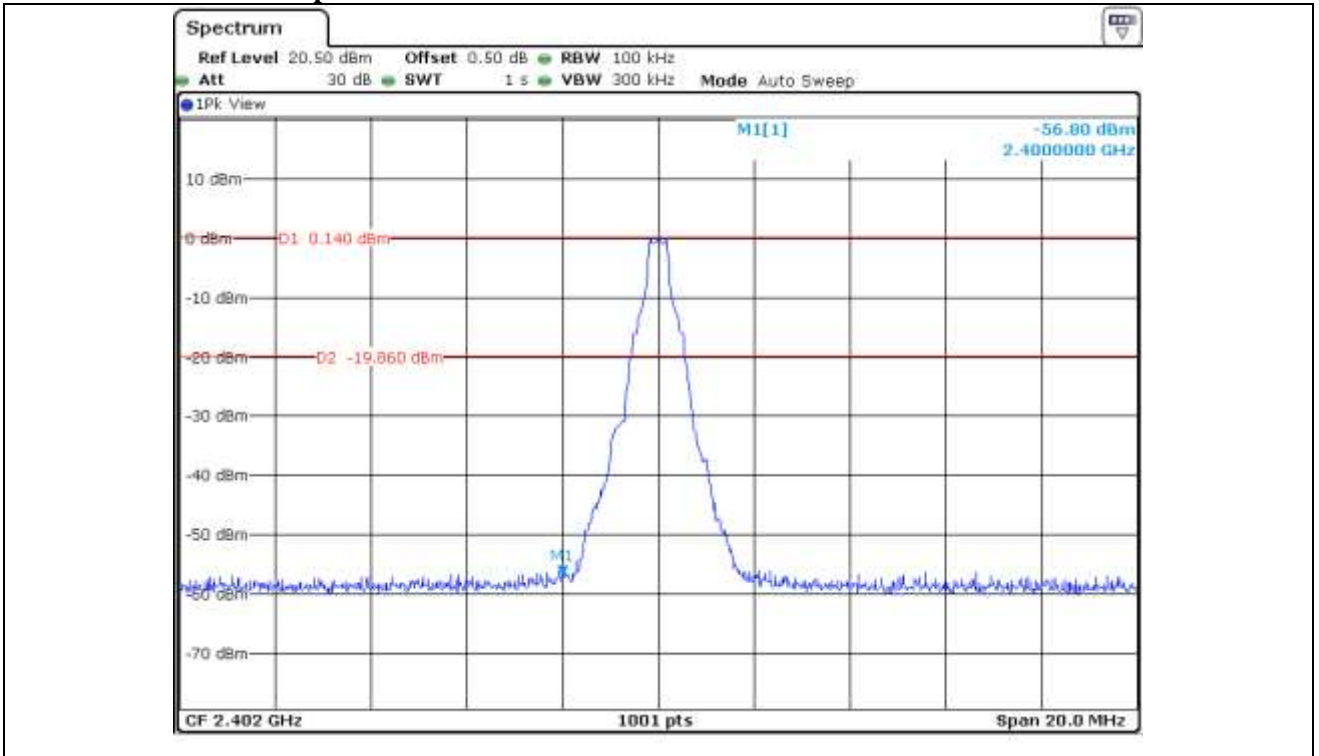


Low Channel

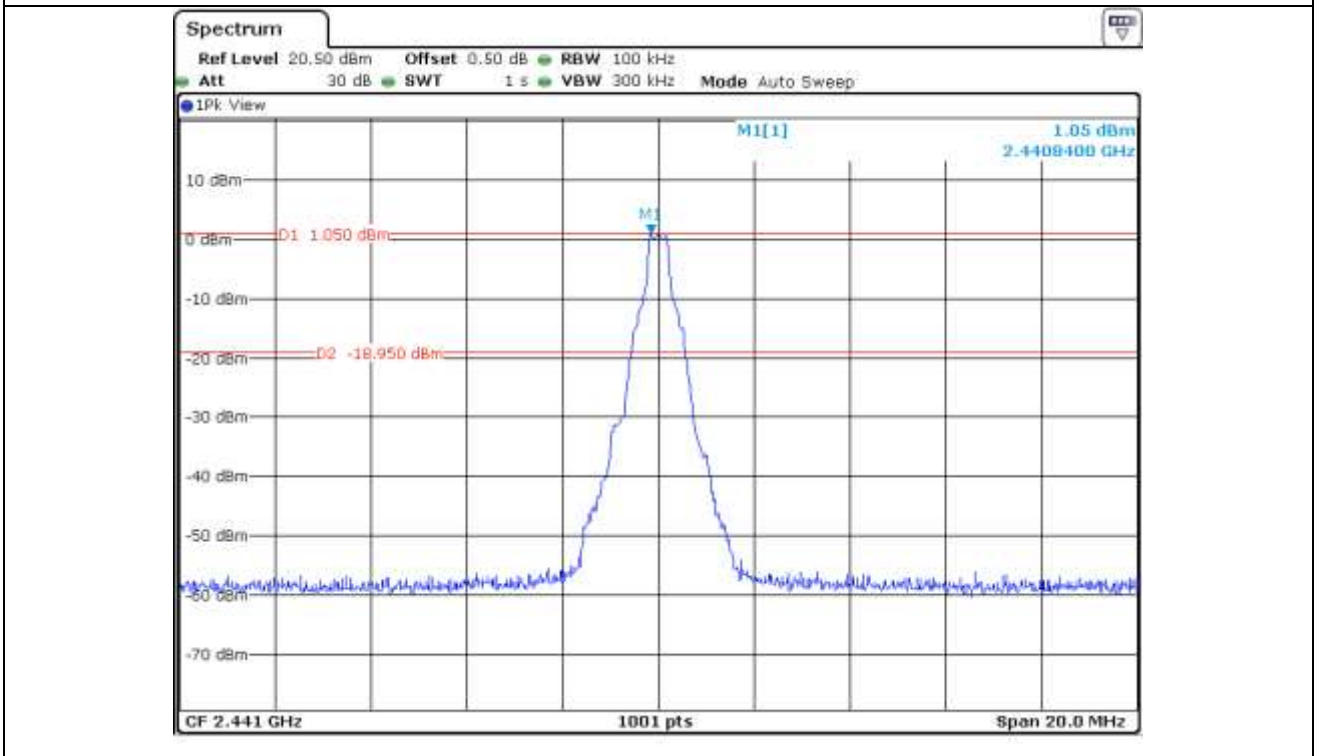


Middle Channel

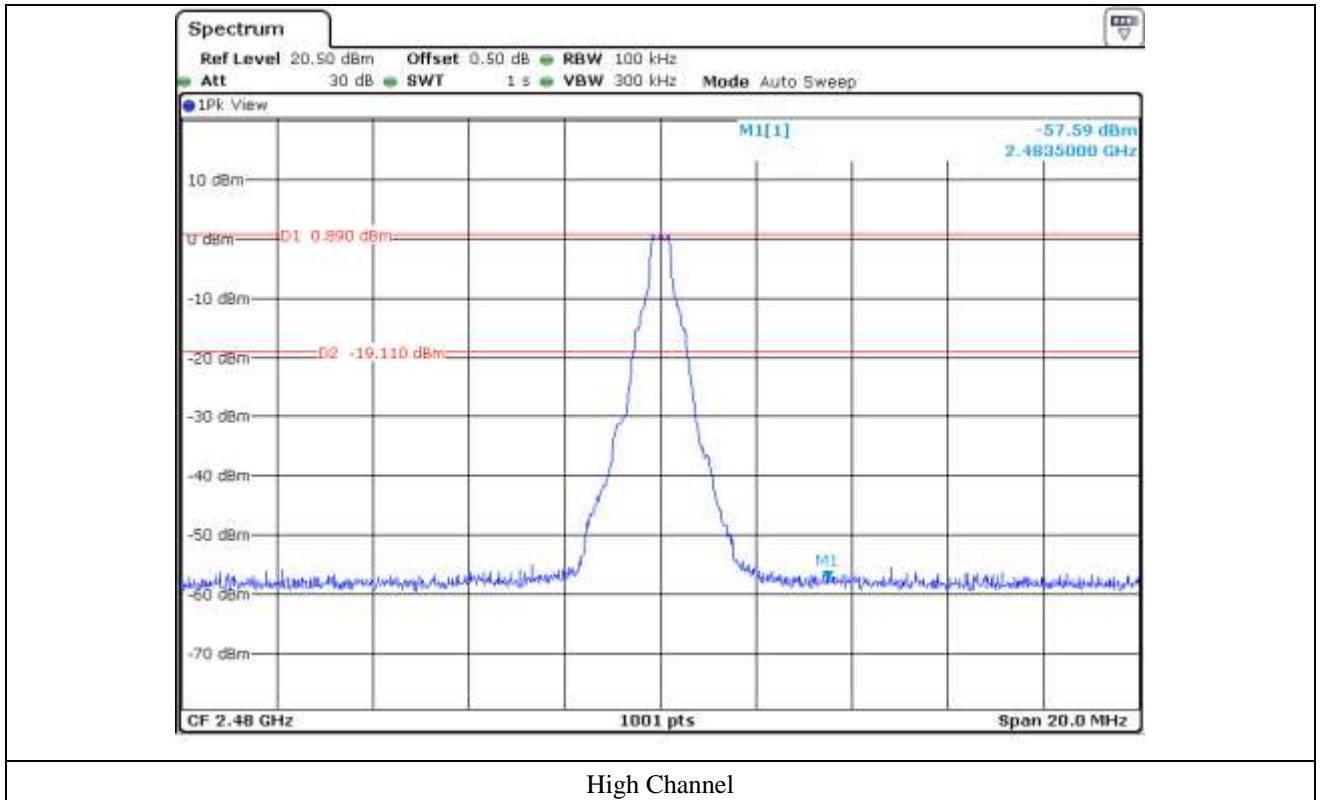


High Channel

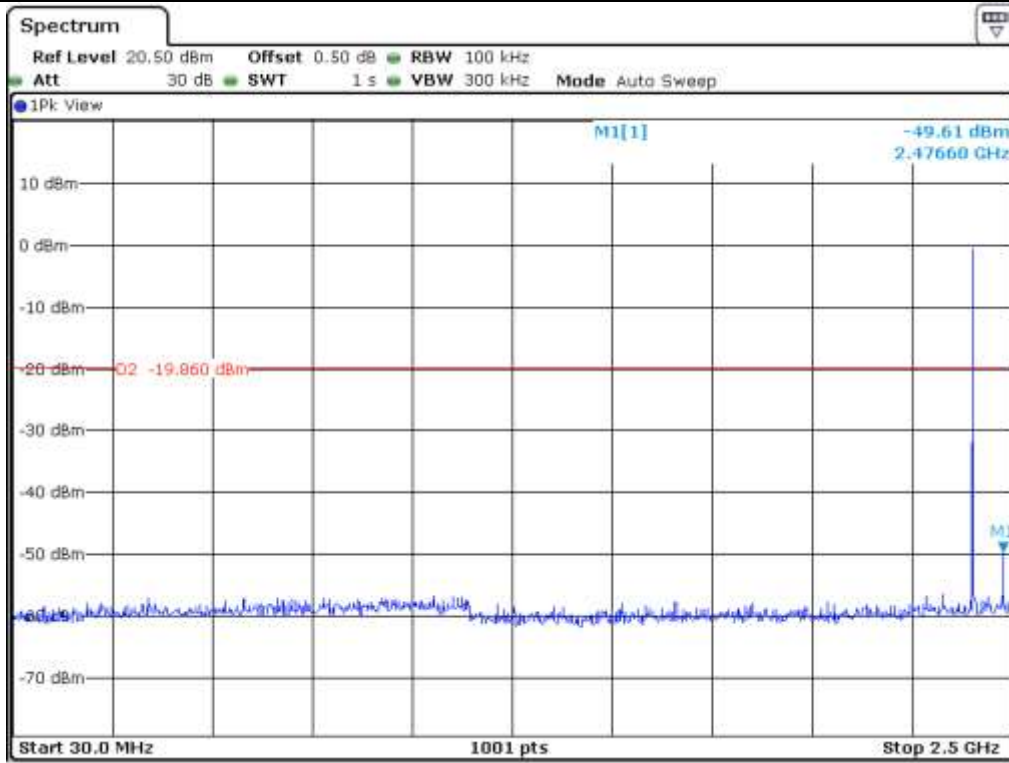


Low Channel

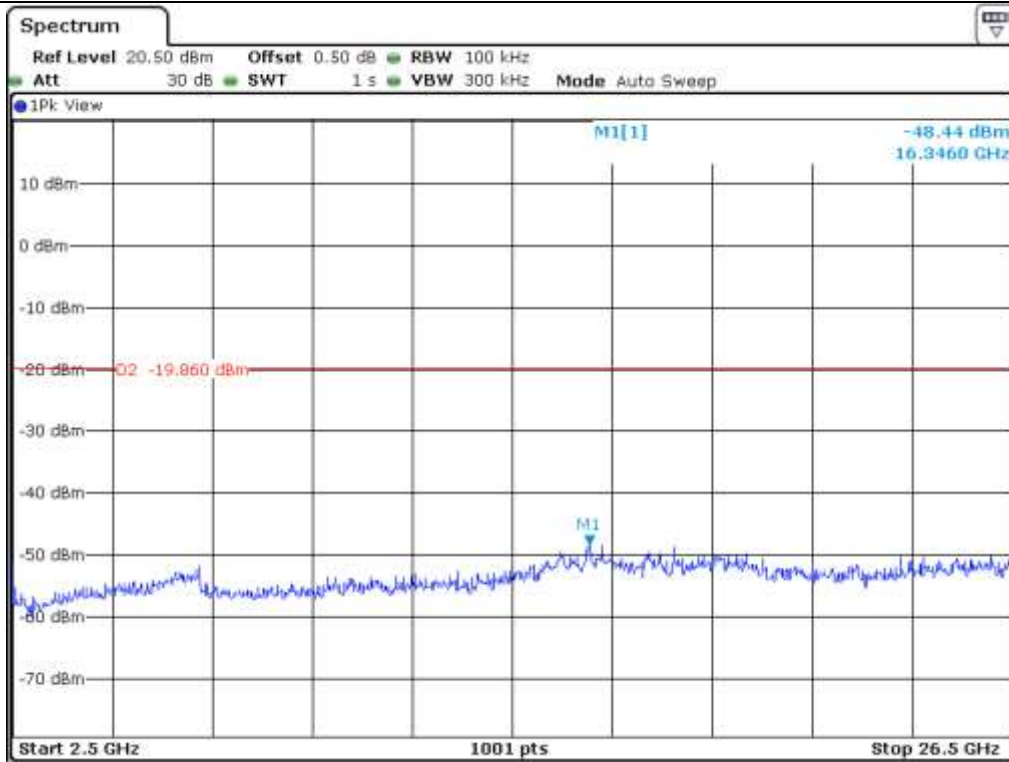


Low Channel

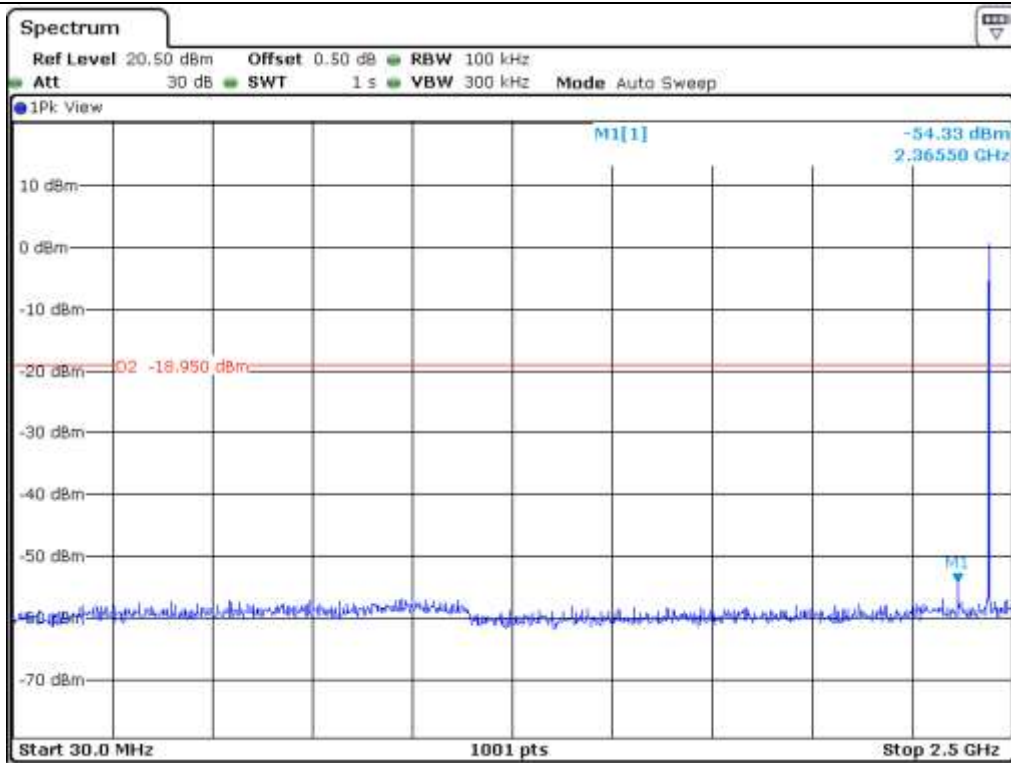


Middle Channel

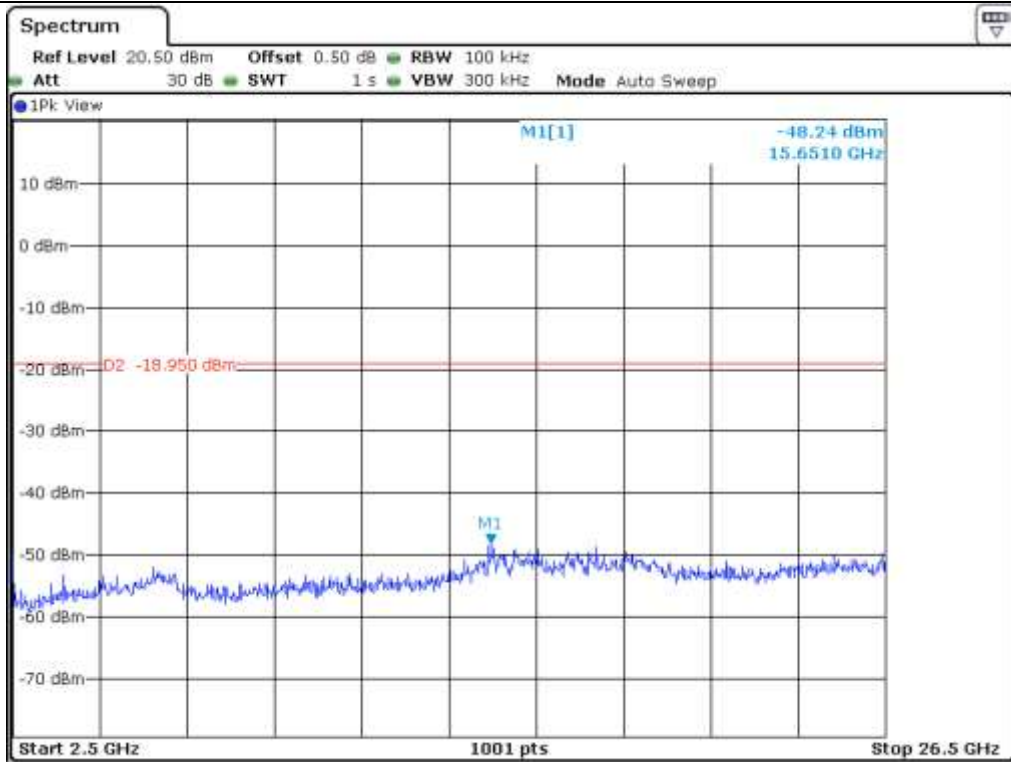

Middle Channel

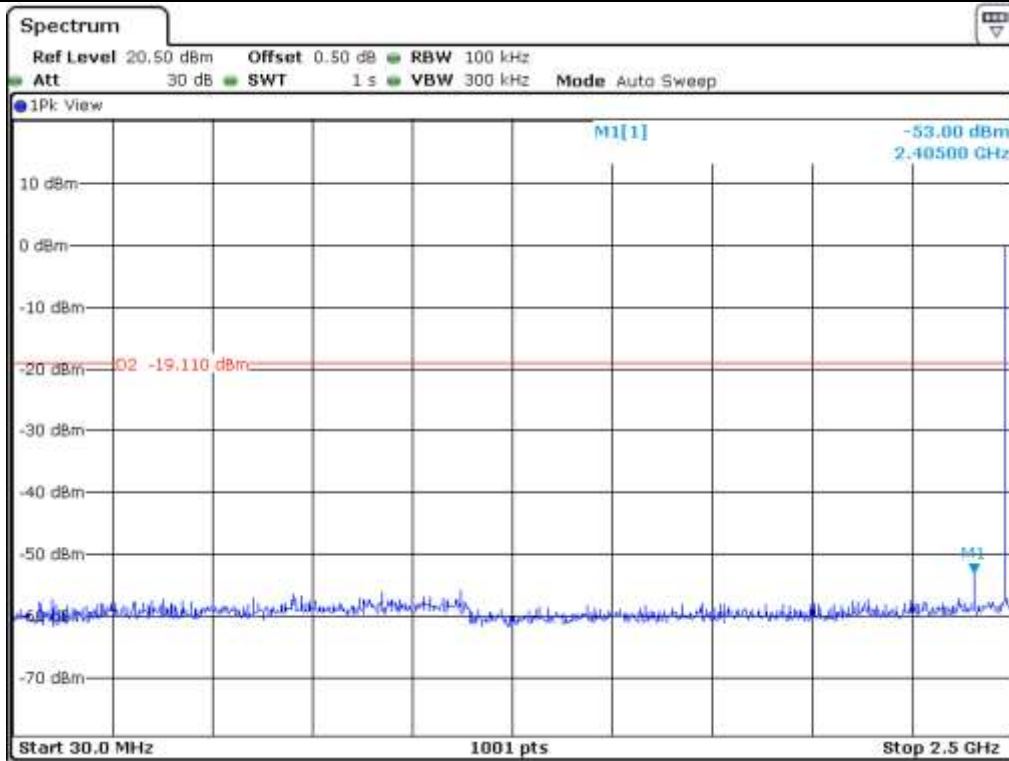


High Channel

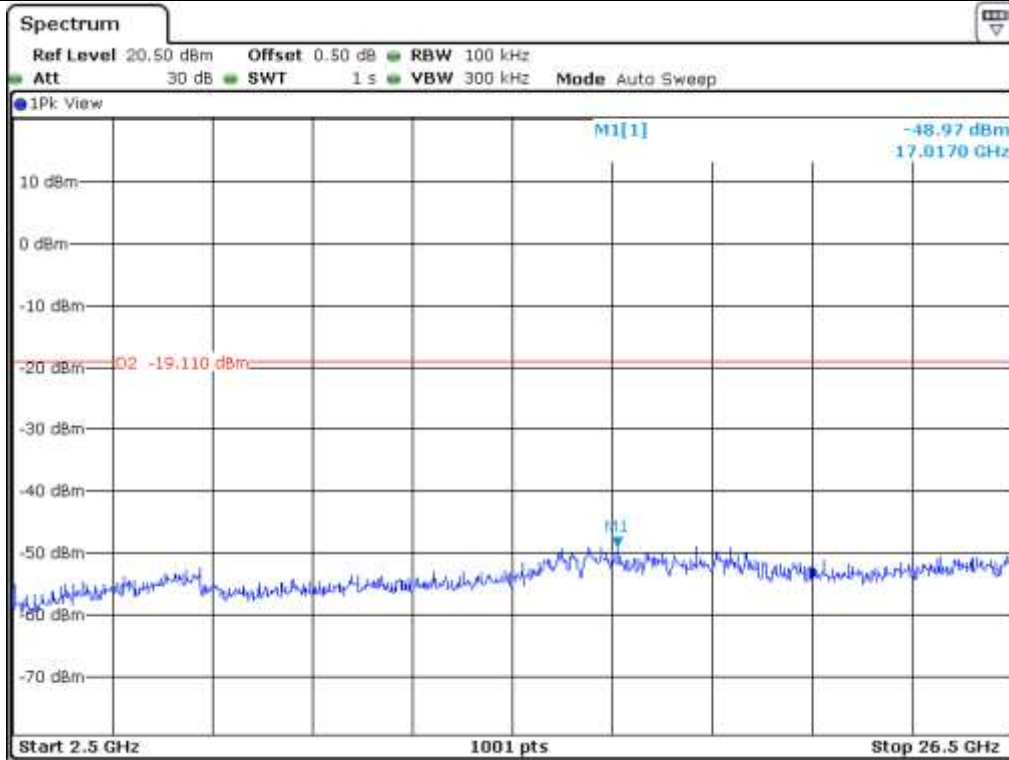


High Channel


12.5.2 Test data for 2 Mbps

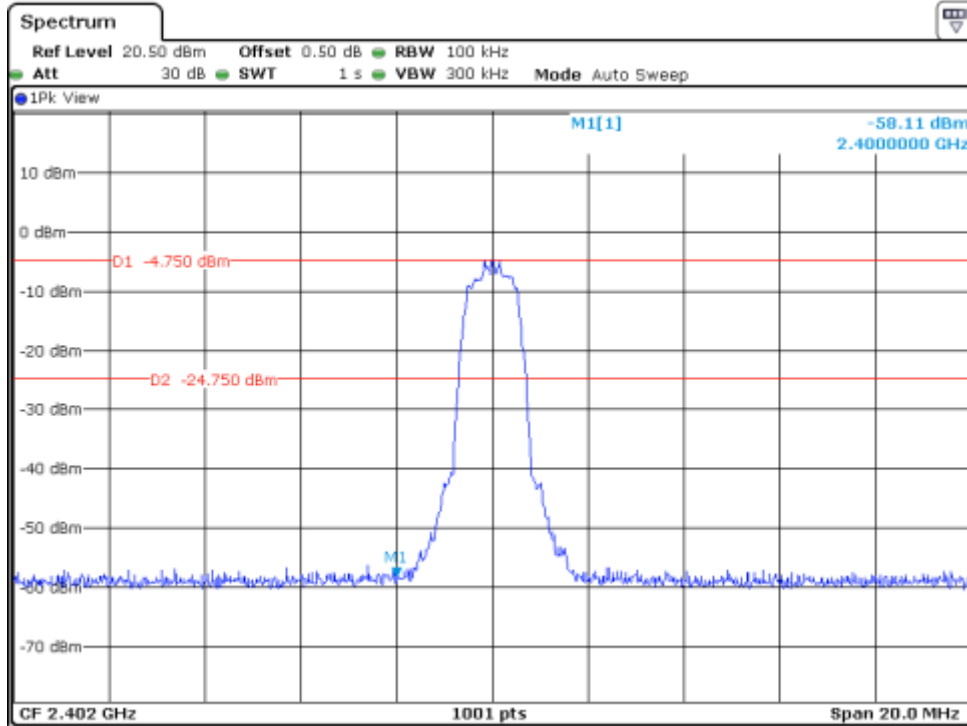


Low Channel

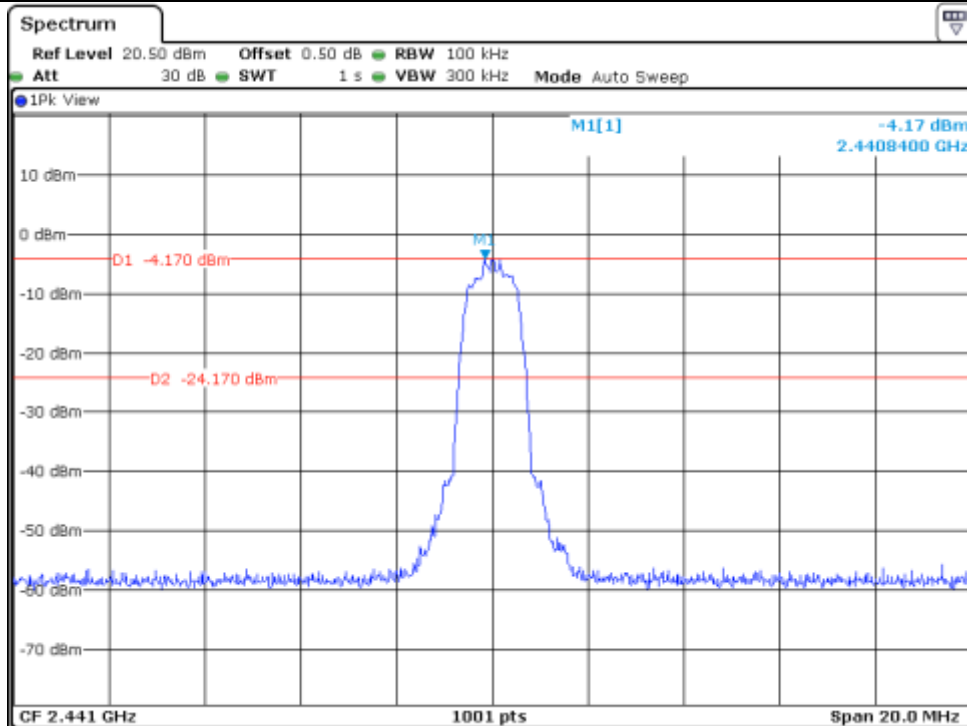


Middle Channel

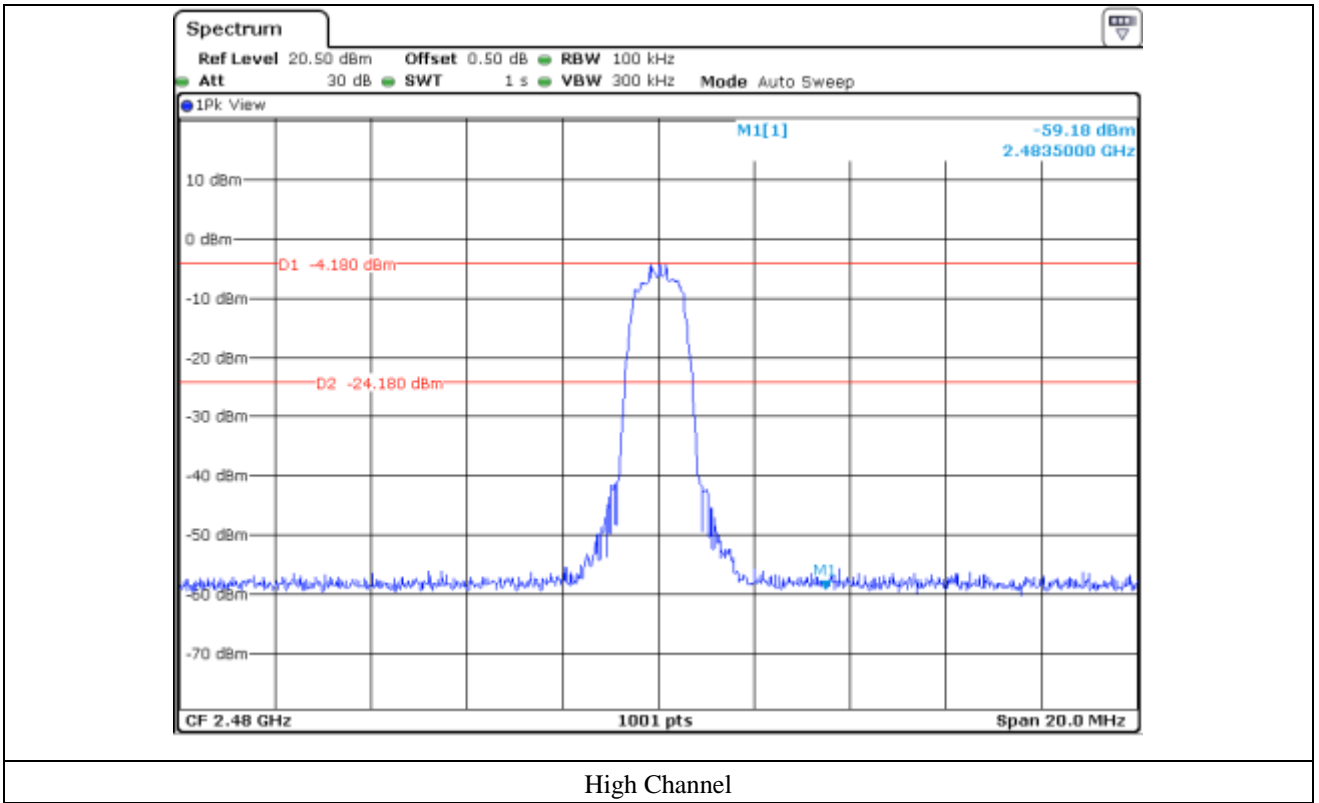


High Channel

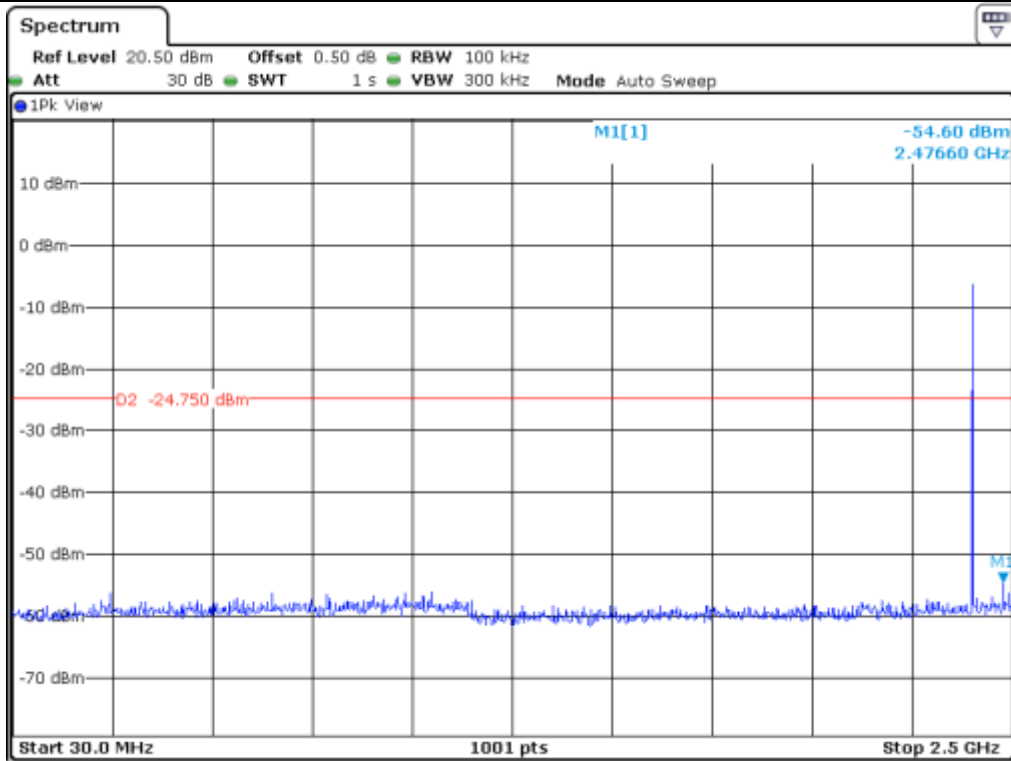


Low Channel

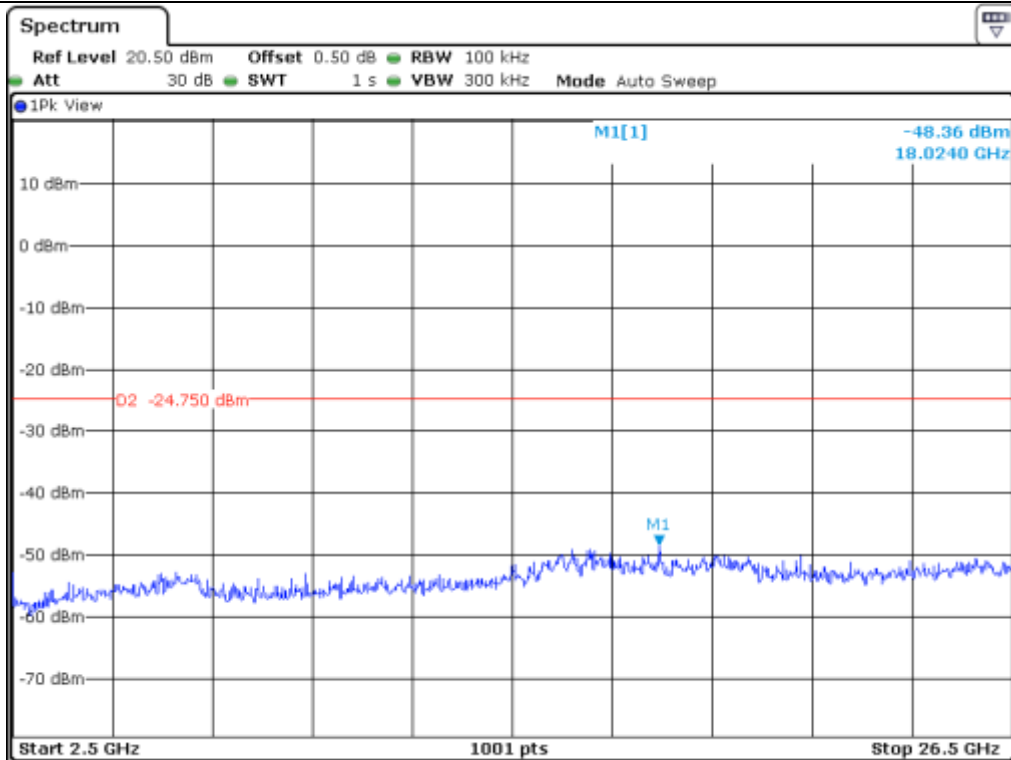


Low Channel

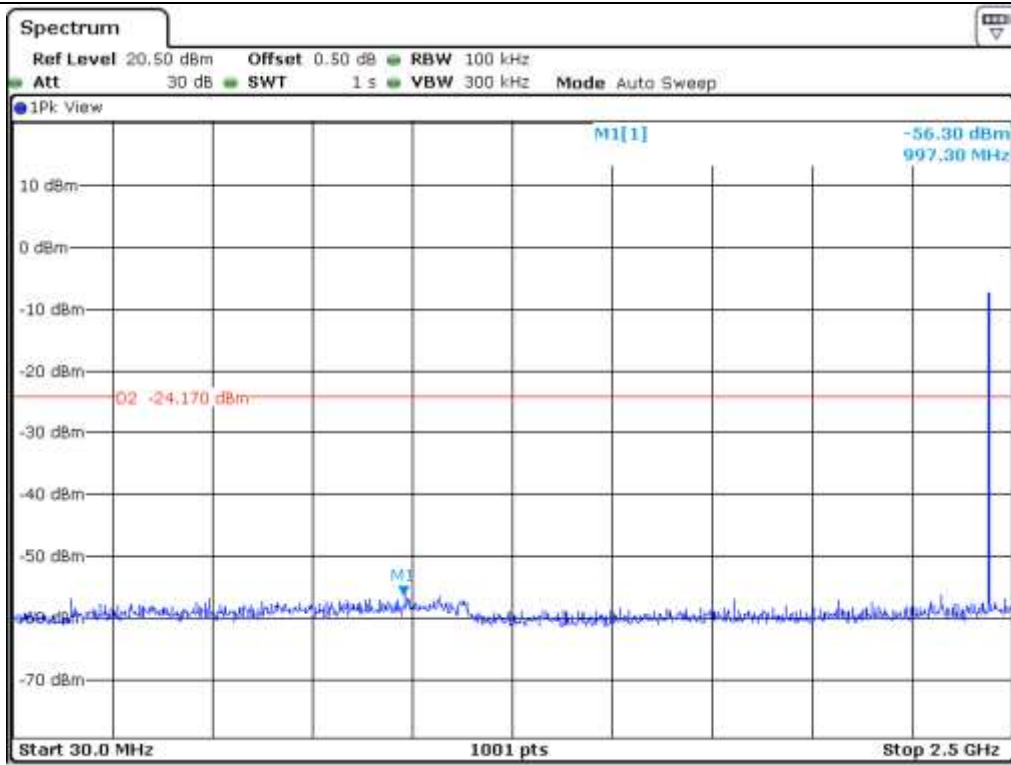


Middle Channel

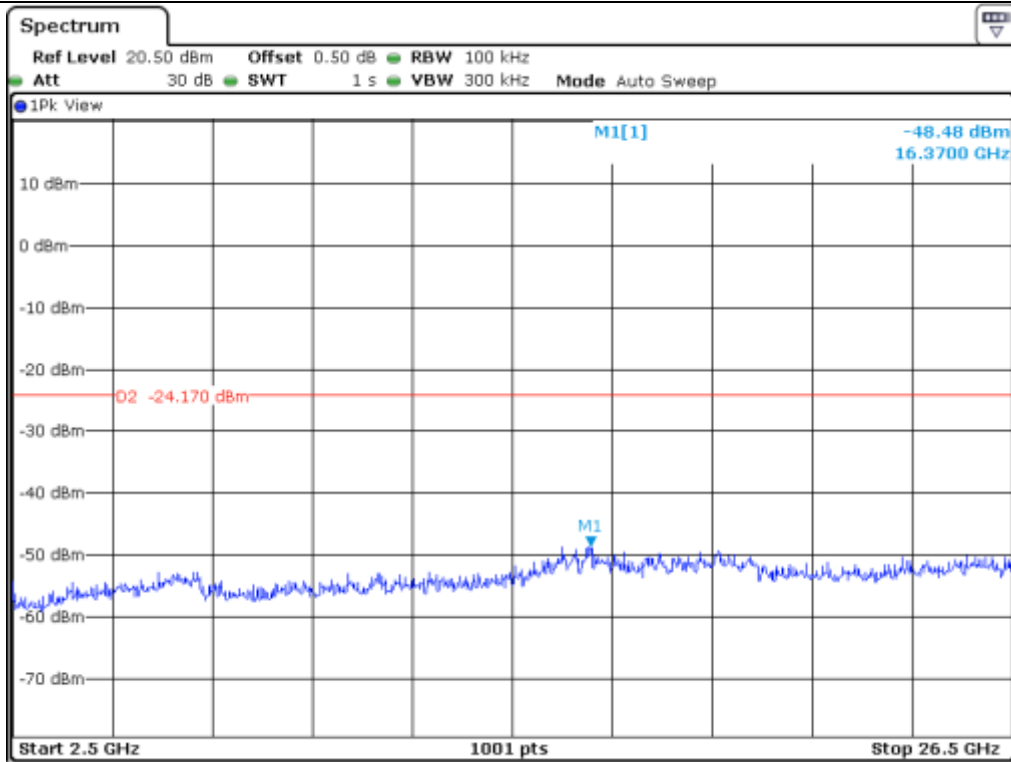

Middle Channel

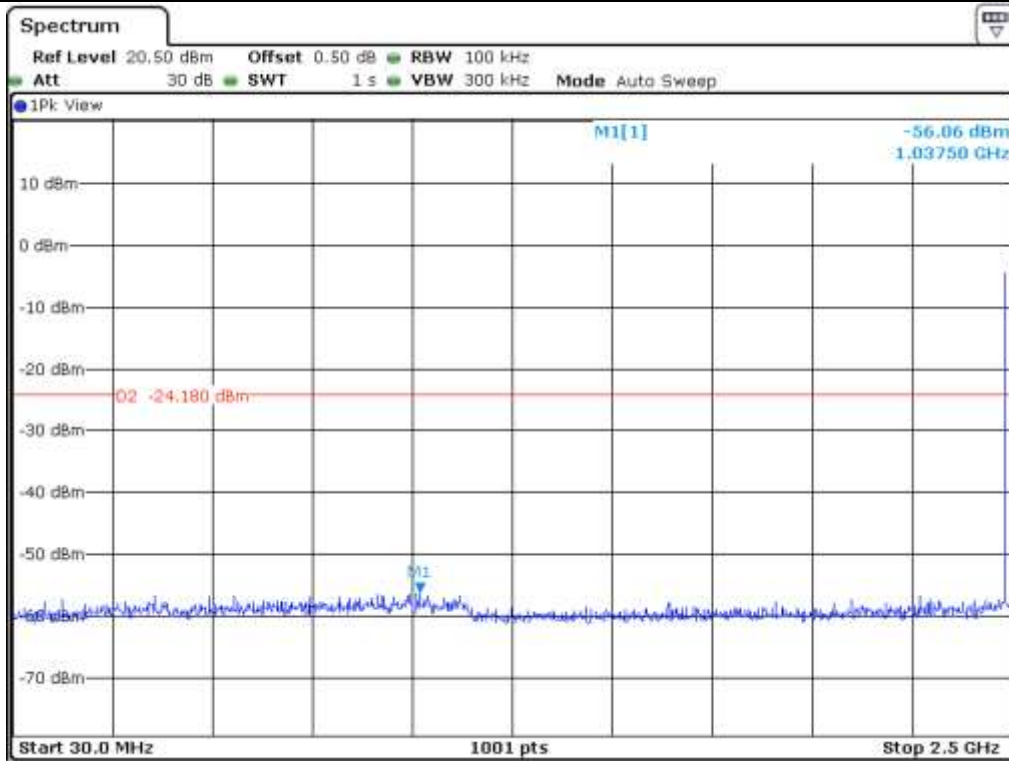


High Channel

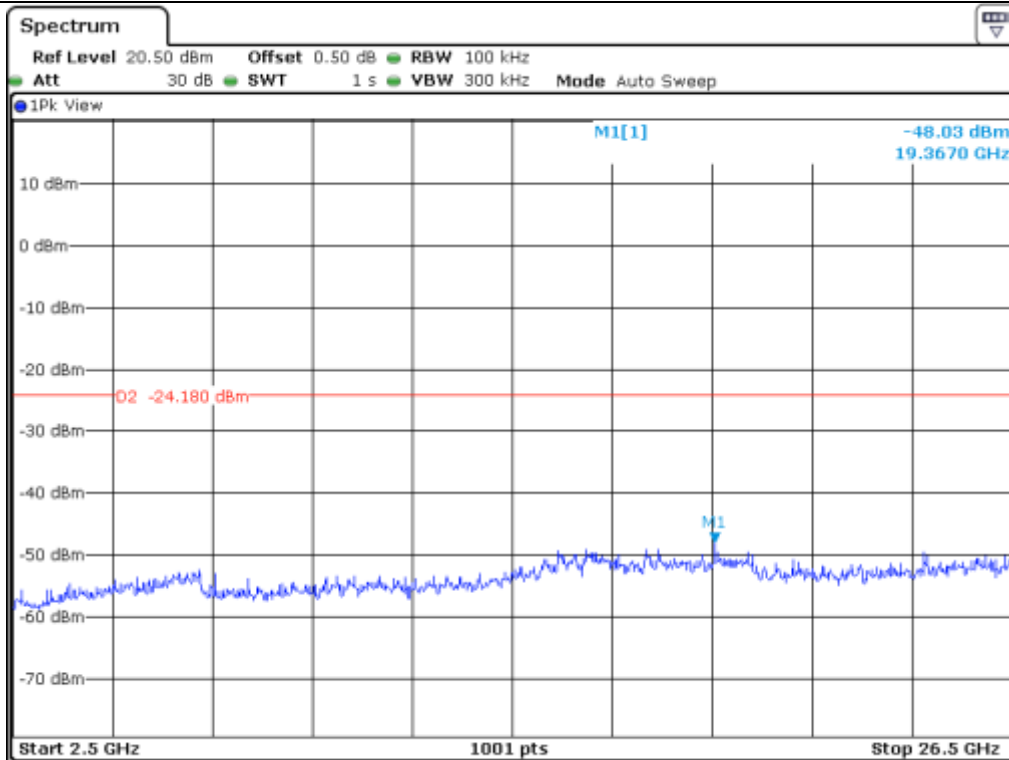


High Channel


12.5.3 Test data for 3 Mbps

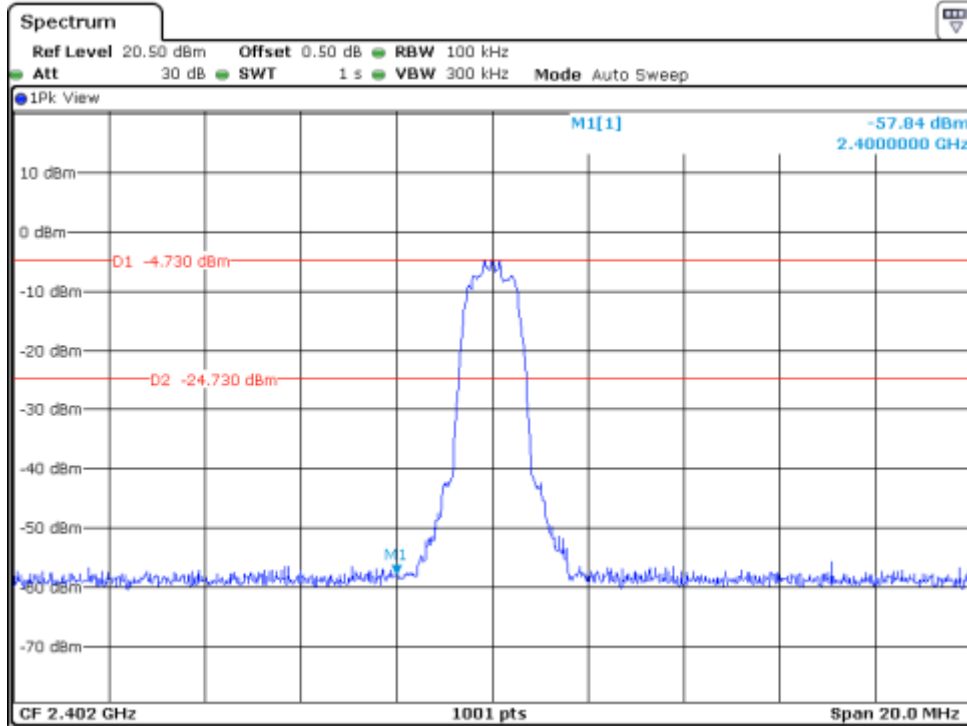


Low Channel

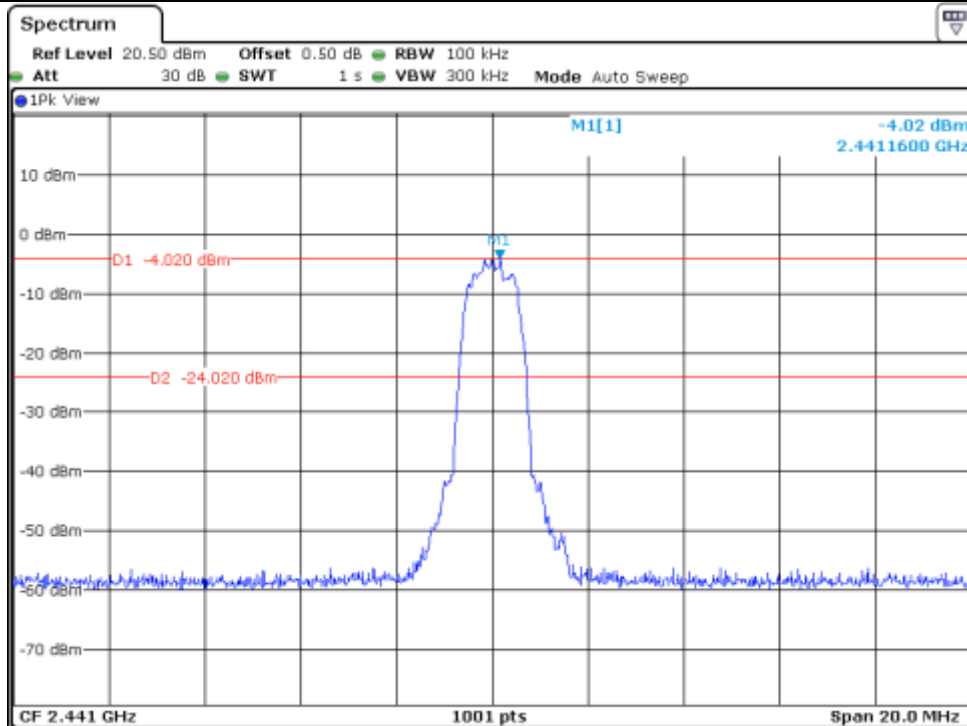


Middle Channel

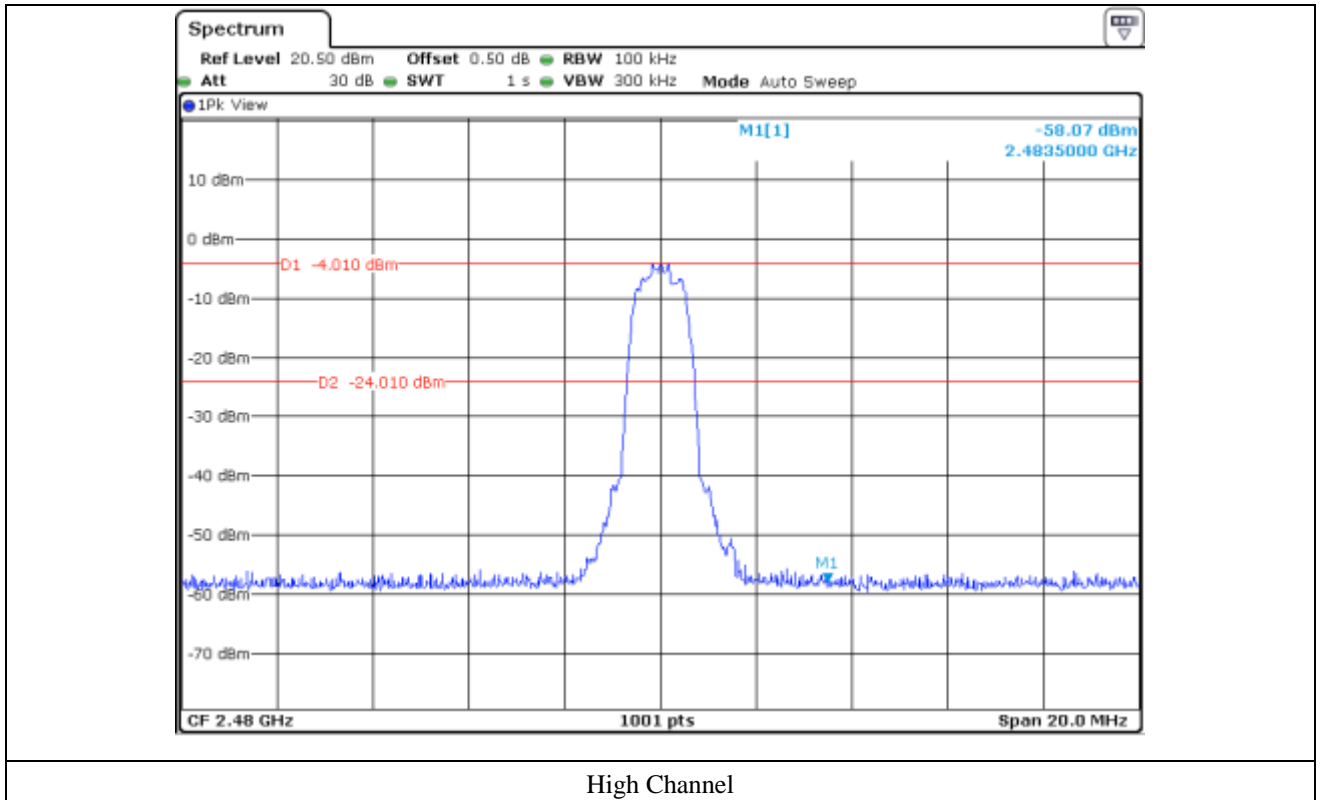


High Channel

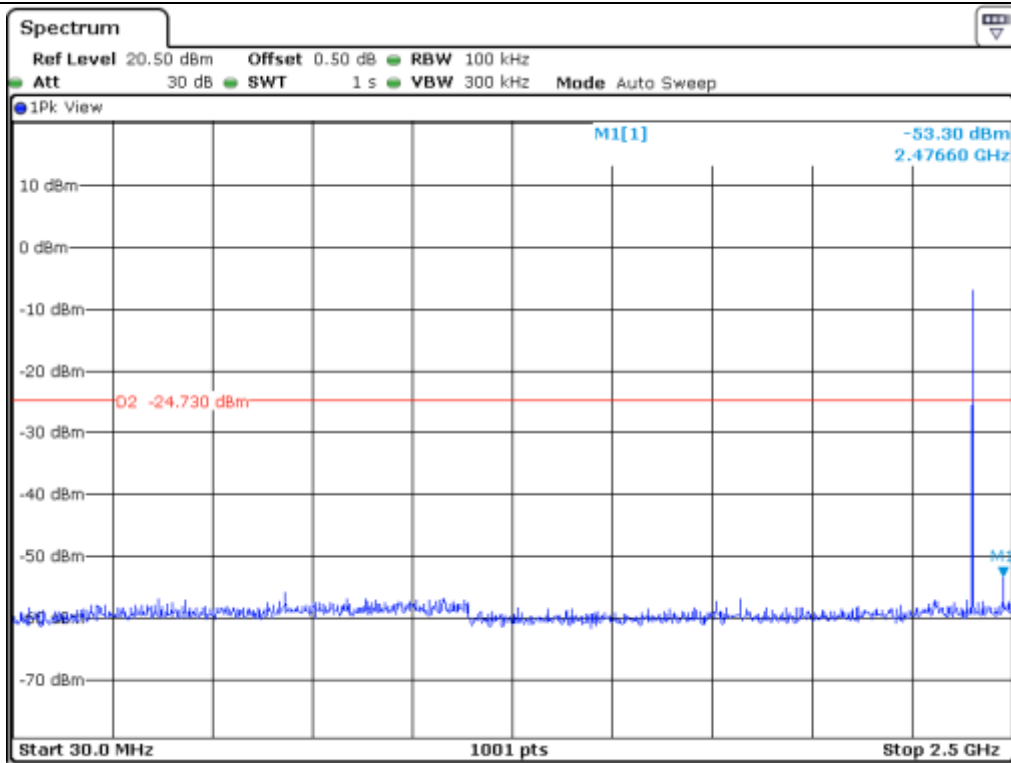


Low Channel

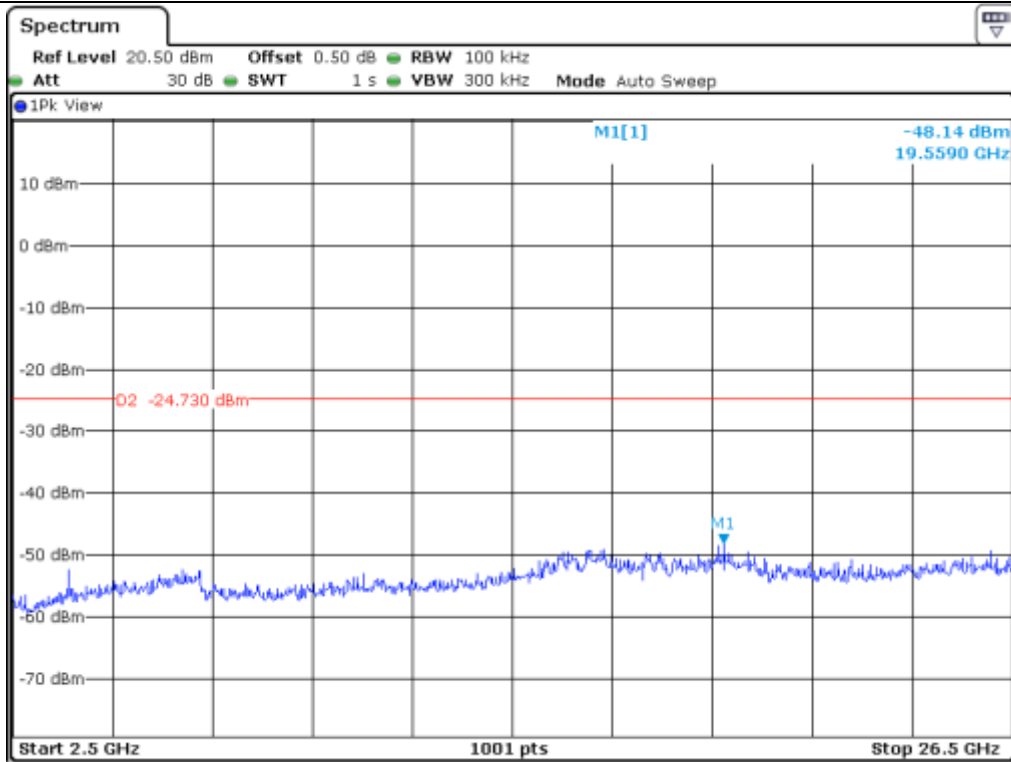


Low Channel

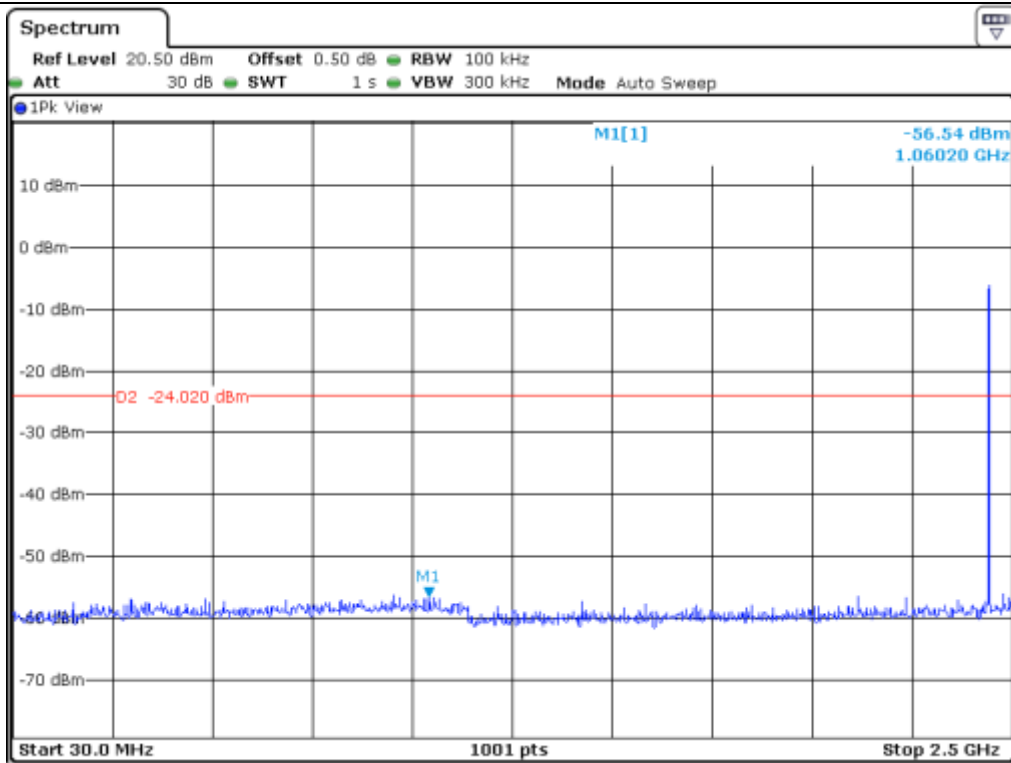


Middle Channel

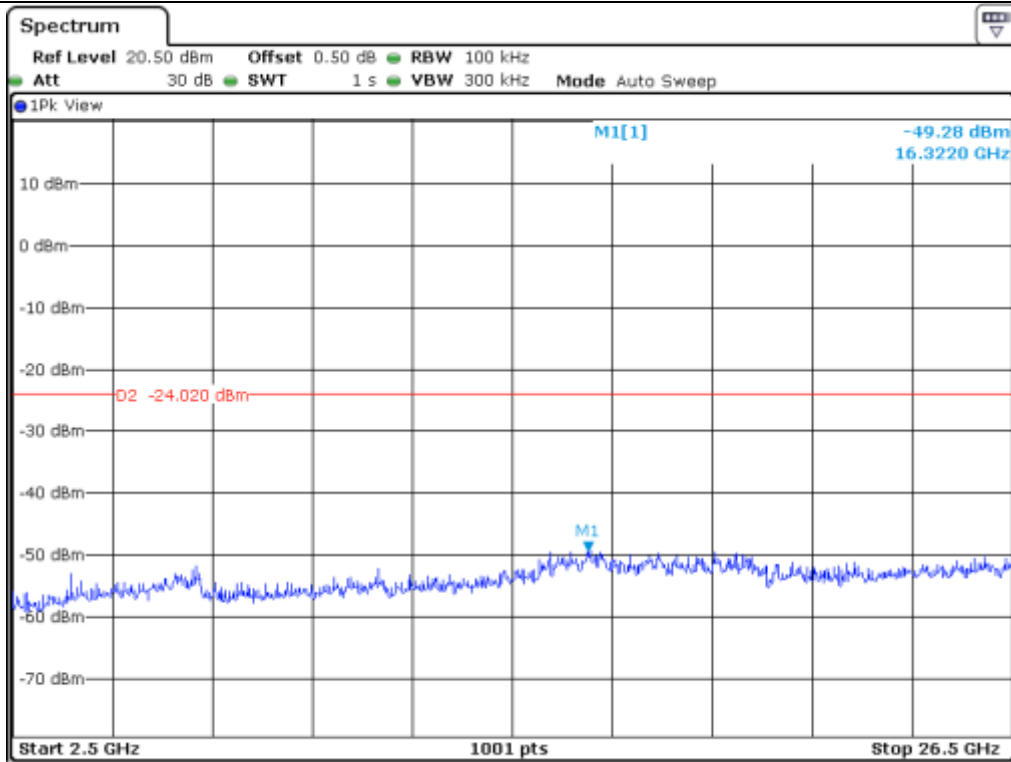

Middle Channel

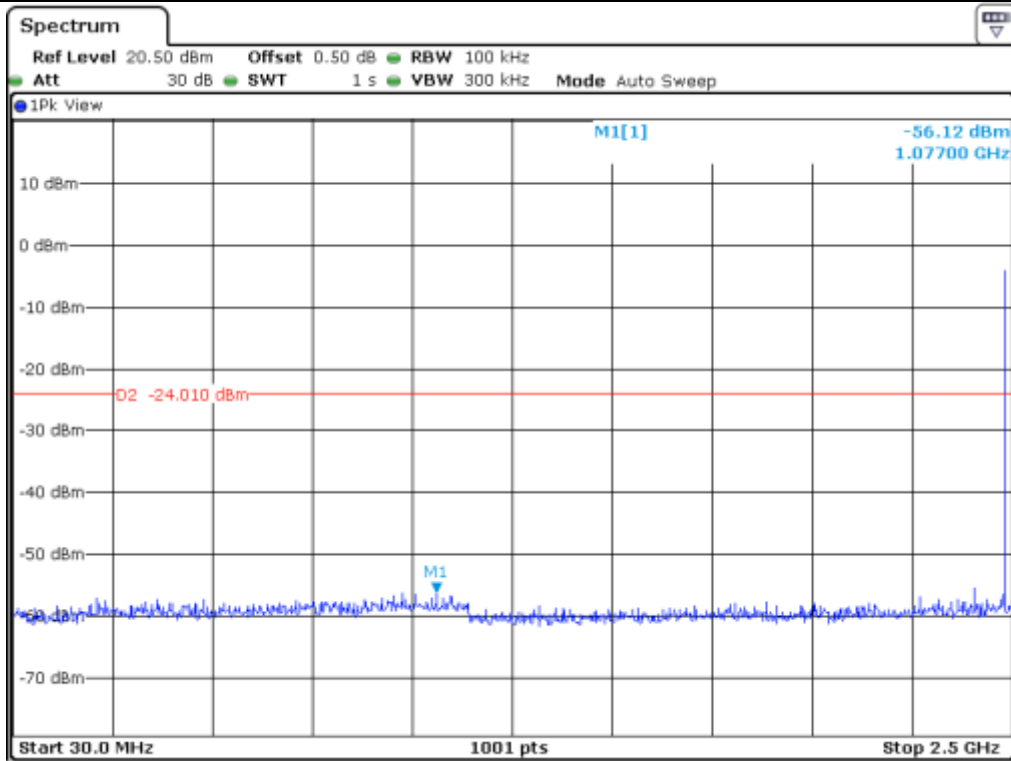

High Channel

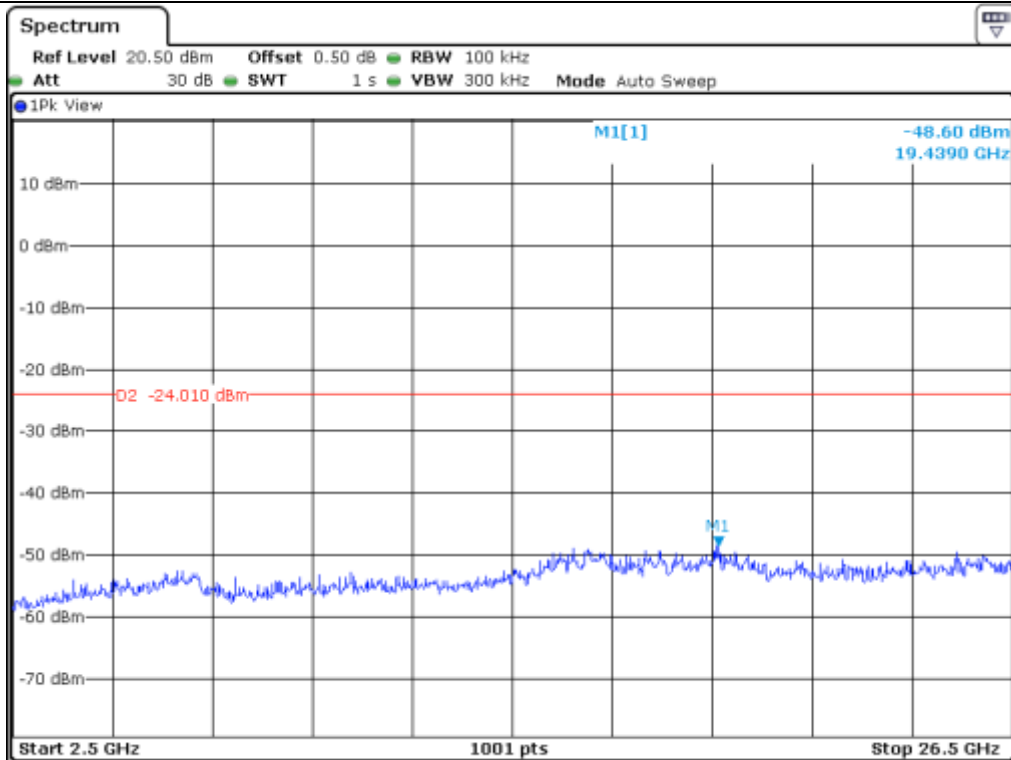

High Channel

12.6 Test data for Transmitting mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band

12.6.1.1 Test data for 1 Mbps

- Test Date : March 23, 2017
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	47.50	Peak	H	26.94	9.20	40.21	43.43	74.00	30.57
	36.70	Average	H				32.63	54.00	21.37
	48.70	Peak	V				44.63	74.00	29.37
	36.90	Average	V				32.83	54.00	21.17
Test Data for High Channel									
2 483.50	47.00	Peak	H	27.20	9.35	40.18	43.37	74.00	30.63
	39.60	Average	H				35.97	54.00	18.03
	49.30	Peak	V				45.67	74.00	28.33
	39.90	Average	V				36.27	54.00	17.73

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Tae-Ho, Kim / Senior Engineer

12.6.1.2 Test data for 2 Mbps

- Test Date : March 23, 2017
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	48.90	Peak	H	26.94	9.20	40.21	44.83	74.00	29.17
	36.70	Average	H				32.63	54.00	21.37
	48.70	Peak	V				44.63	74.00	29.37
	39.30	Average	V				35.23	54.00	18.77
Test Data for High Channel									
2 483.50	47.20	Peak	H	27.20	9.35	40.18	43.57	74.00	30.43
	39.60	Average	H				35.97	54.00	18.03
	48.70	Peak	V				45.07	74.00	28.93
	37.20	Average	V				33.57	54.00	20.43

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Tae-Ho, Kim / Senior Engineer

12.6.1.3 Test data for 3 Mbps

- Test Date : March 23, 2017
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	48.60	Peak	H	26.94	9.20	40.21	44.53	74.00	29.47
	39.50	Average	H				35.43	54.00	18.57
	46.10	Peak	V				42.03	74.00	31.97
	36.90	Average	V				32.83	54.00	21.17
Test Data for High Channel									
2 483.50	49.30	Peak	H	27.20	9.35	40.18	45.67	74.00	28.33
	39.50	Average	H				35.87	54.00	18.13
	48.90	Peak	V				45.27	74.00	28.73
	37.30	Average	V				33.67	54.00	20.33

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Tae-Ho, Kim / Senior Engineer

12.6.2 Radiated Emission which fall in the Band Edge

12.6.2.1 Test data for 1 Mbps

- . Test Date : March 23, 2017
- . Resolution bandwidth : 100 kHz and Peak Detector for Peak Mode
100 kHz and RMS Detector for Average Mode
- . Video bandwidth : 300 kHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 100 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 400.00	59.68	Peak	H	27.47	9.49	40.16	56.48	74.00	17.52
	30.44	Average	H				27.24	54.00	26.76
	58.11	Peak	V				54.91	74.00	19.09
	28.71	Average	V				25.51	54.00	28.49

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Tae-Ho, Kim / Senior Engineer

12.6.2.2 Test data for 2 Mbps

- Test Date : March 23, 2017
- Resolution bandwidth : 100 kHz and Peak Detector for Peak Mode
100 kHz and RMS Detector for Average Mode
- Video bandwidth : 300 kHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 400.00	58.48	Peak	H	27.47	9.49	40.16	55.28	74.00	18.72
	30.74	Average	H				27.54	54.00	26.46
	57.41	Peak	V				54.21	74.00	19.79
	29.01	Average	V				25.81	54.00	28.19

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



Tested by: Tae-Ho, Kim / Senior Engineer

12.6.2.3 Test data for 3 Mbps

- Test Date : March 23, 2017
- Resolution bandwidth : 100 kHz and Peak Detector for Peak Mode
100 kHz and RMS Detector for Average Mode
- Video bandwidth : 300 kHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 400.00	59.78	Peak	H	27.47	9.49	40.16	56.58	74.00	17.42
	30.54	Average	H				27.34	54.00	26.66
	59.81	Peak	V				56.61	74.00	17.39
	31.51	Average	V				28.31	54.00	25.69

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



Tested by: Tae-Ho, Kim / Senior Engineer

12.6.3 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.3.1 Test data for 1 Mbps

- Test Date : March 23, 2017
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	48.90	Peak	H	30.60	12.10	40.69	50.91	74.00	23.09
	37.80	Average	H				39.81	54.00	14.19
	49.90	Peak	V				51.91	74.00	22.09
	36.70	Average	V				38.71	54.00	15.29
Test Data for Middle Channel									
4 882.00	49.00	Peak	H	30.70	12.20	40.65	51.25	74.00	22.75
	38.80	Average	H				41.05	54.00	12.95
	50.00	Peak	V				52.25	74.00	21.75
	39.10	Average	V				41.35	54.00	12.65
Test Data for High Channel									
4 960.00	51.40	Peak	H	30.80	12.30	40.61	53.89	74.00	20.11
	39.20	Average	H				41.69	54.00	12.31
	51.30	Peak	V				53.79	74.00	20.21
	38.40	Average	V				40.89	54.00	13.11

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Tae-Ho, Kim / Senior Engineer

12.6.3.2 Test data for 2 Mbps

- Test Date : March 23, 2017
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	50.80	Peak	H	30.60	11.10	40.69	51.81	74.00	22.19
	37.70	Average	H				38.71	54.00	15.29
	48.20	Peak	V				49.21	74.00	24.79
	39.00	Average	V				40.01	54.00	13.99
Test Data for Middle Channel									
4 882.00	49.10	Peak	H	30.70	11.20	40.65	50.35	74.00	23.65
	39.80	Average	H				41.05	54.00	12.95
	51.20	Peak	V				52.45	74.00	21.55
	39.80	Average	V				41.05	54.00	12.95
Test Data for High Channel									
4 960.00	50.00	Peak	H	30.80	11.30	40.61	51.49	74.00	22.51
	38.50	Average	H				39.99	54.00	14.01
	51.70	Peak	V				53.19	74.00	20.81
	37.20	Average	V				38.69	54.00	15.31

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Tae-Ho, Kim / Senior Engineer

12.6.3.3 Test data for 3 Mbps

- Test Date : March 23, 2017
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	50.80	Peak	H	30.60	11.10	40.69	51.81	74.00	22.19
	37.30	Average	H				38.31	54.00	15.69
	48.80	Peak	V				49.81	74.00	24.19
	38.80	Average	V				39.81	54.00	14.19
Test Data for Middle Channel									
4 882.00	49.80	Peak	H	30.70	11.20	40.65	51.05	74.00	22.95
	37.00	Average	H				38.25	54.00	15.75
	50.30	Peak	V				51.55	74.00	22.45
	39.90	Average	V				41.15	54.00	12.85
Test Data for High Channel									
4 960.00	50.20	Peak	H	30.80	11.30	40.61	51.69	74.00	22.31
	38.10	Average	H				39.59	54.00	14.41
	49.80	Peak	V				51.29	74.00	22.71
	39.50	Average	V				40.99	54.00	13.01

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Tae-Ho, Kim / Senior Engineer

13. RADIATED EMISSION TEST

13.1 Operating environment

Temperature : 21 °C
 Relative humidity : 45 % R.H.

13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.


13.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	April 05, 2017 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 06, 2017 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2017 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	102209	May 31, 2016 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (1Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Aug. 31, 2015 (2Y)

All test equipment used is calibrated on a regular basis.

13.4 Test data for 30 MHz ~ 1 000 MHz

- Test Date : March 23, 2017
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

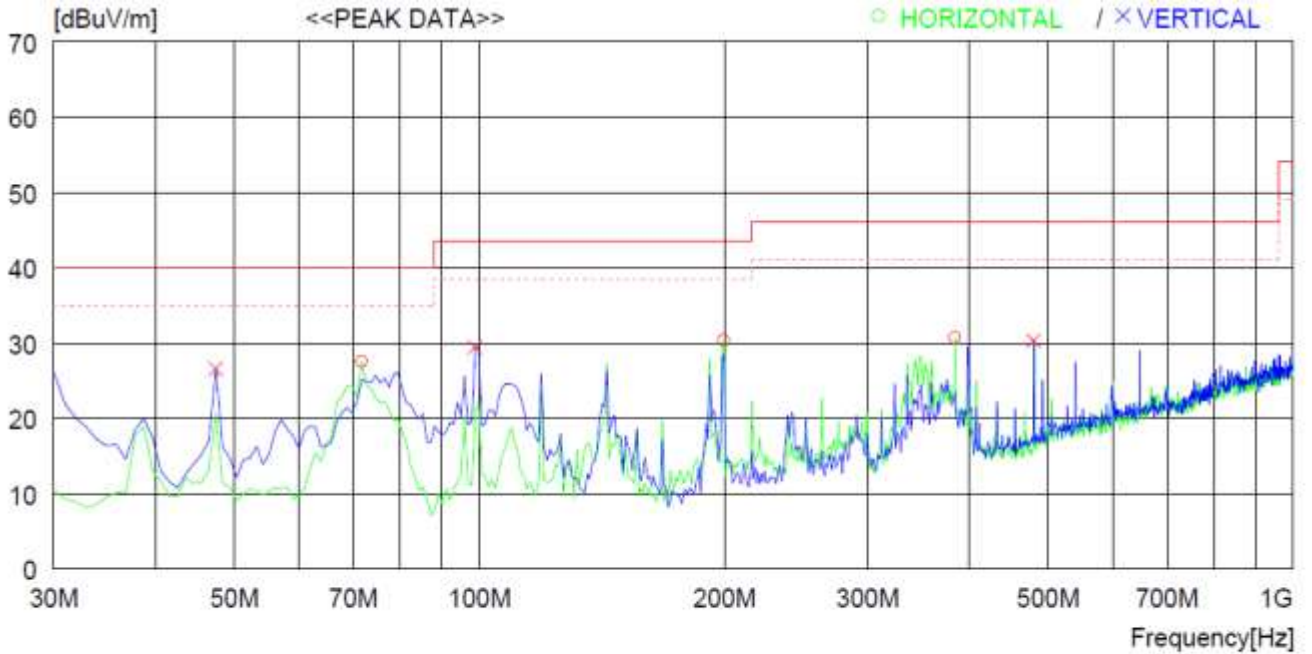

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	71.710	49.3	9.0	2.3	33.1	27.5	40.0	12.5	100	65
2	199.750	48.9	10.7	3.7	33.0	30.3	43.5	13.2	100	65
3	384.050	43.1	15.5	5.2	33.1	30.7	46.0	15.3	100	96
----- Vertical -----										
4	47.460	43.3	14.3	2.0	33.0	26.6	40.0	13.4	100	236
5	98.870	47.6	12.2	2.7	33.1	29.4	43.5	14.1	100	236
6	480.081	41.0	16.6	5.9	33.2	30.3	46.0	15.7	100	236

Tested by: Tae-Ho, Kim / Senior Engineer

13.5 Test data for Below 30 MHz

- . Test Date : March 23, 2017
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
It was not observed any emissions from the EUT.								

13.6 Test data for above 1 GHz

- . Test Date : March 23, 2017
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
It was not observed any emissions from the EUT.								



Tested by: Tae-Ho, Kim / Senior Engineer

14. CONDUCTED EMISSION TEST

14.1 Operating environment

Temperature : (23 ~ 24) °C
 Relative humidity : (46 ~ 47) % R.H.

14.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


14.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESPI	Rohde & Schwarz	Test Receiver	101012	Nov. 01, 2016 (1Y)
□ - ESHS10	Rohde & Schwarz	Test Receiver	834467/007	Apr. 05, 2017 (1Y)
□ - NSLK8128	Schwarzbeck	AMN	8128-216	Apr. 06, 2017 (1Y)
■ - NSLK8126	Schwarzbeck	AMN	8126-404	Apr. 05, 2017 (1Y)
□ - 3825/2	EMCO	AMN	9109-1869	Apr. 06, 2017 (1Y)
■ - 3825/2	EMCO	AMN	9109-1867	Apr. 06, 2017 (1Y)

All test equipment used is calibrated on a regular basis.


14.4 Test data

- Test Date : March 27, 2017
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

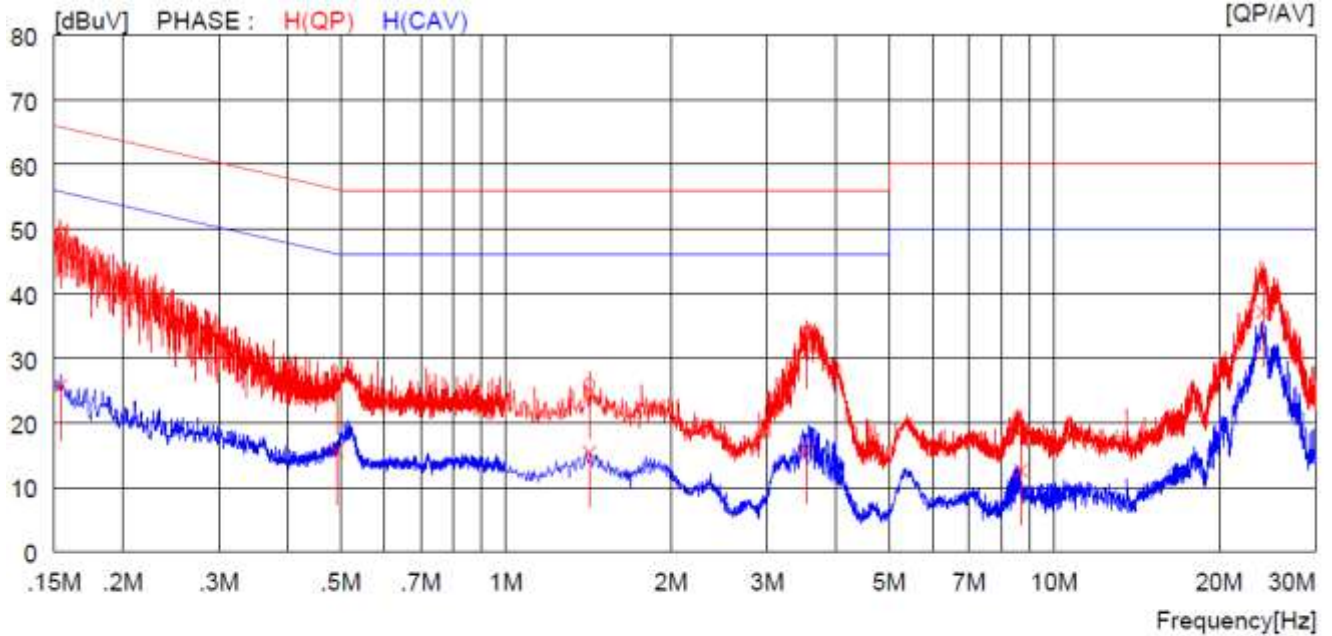

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15400	49.3	----	0.1	49.4	----	65.8	----	16.4	----	H(QP)
2	0.49100	26.5	----	0.1	26.6	----	56.2	----	29.6	----	H(QP)
3	1.42000	25.9	----	0.1	26.0	----	56.0	----	30.0	----	H(QP)
4	3.53200	33.7	----	0.1	33.8	----	56.0	----	22.2	----	H(QP)
5	8.69500	18.9	----	0.2	19.1	----	60.0	----	40.9	----	H(QP)
6	24.00000	41.7	----	0.5	42.2	----	60.0	----	17.8	----	H(QP)
7	0.15400	----	25.6	0.1	----	25.7	----	55.8	----	30.1	H(CAV)
8	0.49100	----	15.6	0.1	----	15.7	----	46.2	----	30.5	H(CAV)
9	1.42000	----	15.3	0.1	----	15.4	----	46.0	----	30.6	H(CAV)
10	3.53200	----	15.8	0.1	----	15.9	----	46.0	----	30.1	H(CAV)
11	8.69500	----	12.4	0.2	----	12.6	----	50.0	----	37.4	H(CAV)
12	24.00000	----	36.6	0.5	----	37.1	----	50.0	----	12.9	H(CAV)

-. Tested Line : NEUTRAL LINE

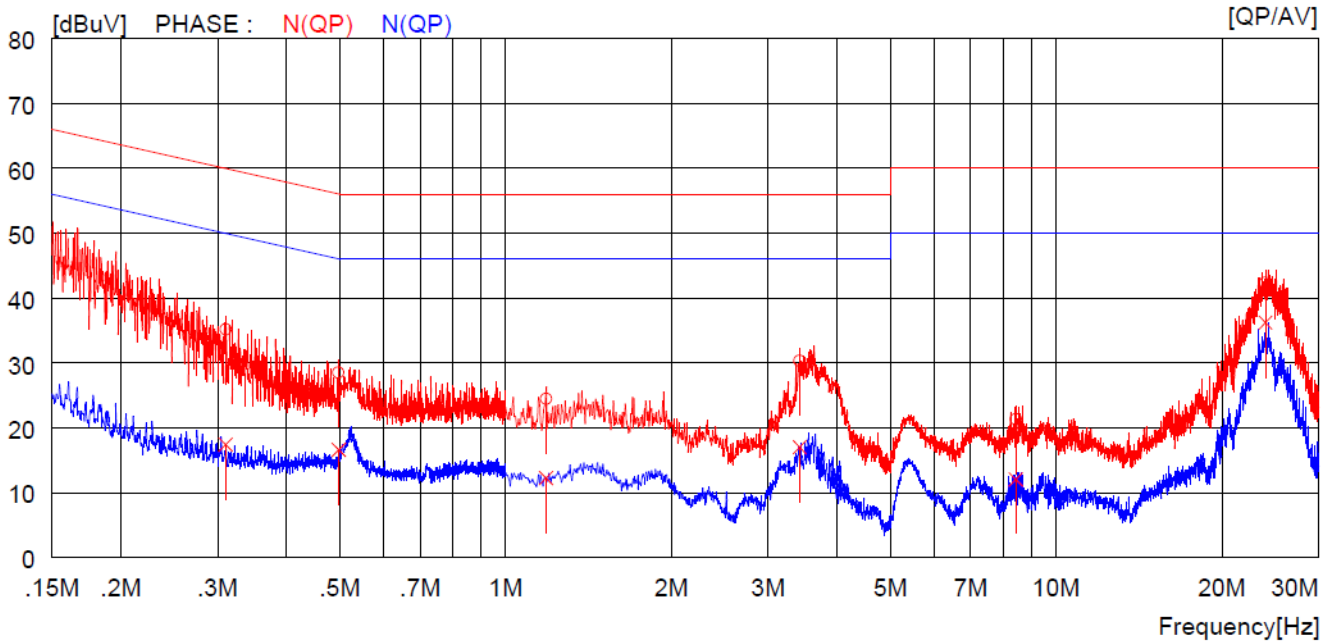

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.31000	35.1	----	0.1	35.2	----	60.0	----	24.8	----	N (QP)
2	0.49700	28.4	----	0.1	28.5	----	56.0	----	27.5	----	N (QP)
3	1.18400	24.3	----	0.1	24.4	----	56.0	----	31.6	----	N (QP)
4	3.42000	30.2	----	0.1	30.3	----	56.0	----	25.7	----	N (QP)
5	8.45500	21.1	----	0.2	21.3	----	60.0	----	38.7	----	N (QP)
6	24.00000	41.8	----	0.5	42.3	----	60.0	----	17.7	----	N (QP)
7	0.31000	----	17.3	0.1	----	17.4	----	50.0	----	32.6	N (CAV)
8	0.49700	----	16.5	0.1	----	16.6	----	46.0	----	29.4	N (CAV)
9	1.18400	----	12.2	0.1	----	12.3	----	46.0	----	33.7	N (CAV)
10	3.42000	----	16.9	0.1	----	17.0	----	46.0	----	29.0	N (CAV)
11	8.45500	----	11.9	0.2	----	12.1	----	50.0	----	37.9	N (CAV)
12	24.00000	----	35.7	0.5	----	36.2	----	50.0	----	13.8	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Tae-Ho, Kim / Senior Engineer