

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-211-RWD-001
Reception No. : 2012005224
Applicant : LG Innotek Co., Ltd.
Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Manufacturer : LG Innotek Co., Ltd.
Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Type of Equipment : BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module
FCC ID. : YZP-RBHPB216C1
Model Name : RBHP-B216C
Serial number : N/A
Total page of Report : 60 pages (including this page)
Date of Incoming : December 03, 2020
Date of issue : January 04, 2021

SUMMARY


The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
 Hyung-Kwon, Oh / Manager
 ONETECH Corp.



Reviewed by
 Tae-Ho, Kim / Senior Manager
 ONETECH Corp.



Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	10
4. EUT MODIFICATIONS.....	10
5. SYSTEM TEST CONFIGURATION.....	11
5.1 JUSTIFICATION.....	11
5.2 PERIPHERAL EQUIPMENT	11
5.3 MODE OF OPERATION DURING THE TEST	12
5.4 CONFIGURATION OF TEST SYSTEM.....	13
5.5 ANTENNA REQUIREMENT	13
6. PRELIMINARY TEST	13
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	13
6.2 GENERAL RADIATED EMISSIONS TESTS	13
7. MIMIMUM 6 DB BANDWIDTH	14
7.1 OPERATING ENVIRONMENT	14
7.2 TEST SET-UP	14
7.3 TEST DATE	14
7.4 TEST DATA FOR 802.11B WLAN MODE.....	15
7.5 TEST DATA FOR 802.11G WLAN MODE	17
7.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	19
8. MAXIMUM PEAK OUTPUT POWER.....	21
8.1 OPERATING ENVIRONMENT	21
8.2 TEST SET-UP	21

8.3 TEST DATE	21
8.4 TEST DATA FOR 802.11B WLAN MODE.....	22
8.5 TEST DATA FOR 802.11G WLAN MODE	24
8.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	26
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	28
9.1 OPERATING ENVIRONMENT	28
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	28
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	28
9.4 TEST DATE	28
9.5 TEST DATA FOR CONDUCTED EMISSION	29
9.5.1 Test data for 802.11b WLAN Mode.....	29
9.5.2 Test data for 802.11g WLAN Mode.....	34
9.5.3 Test data for 802.11n_HT20 WLAN Mode.....	39
9.6 TEST DATA FOR RADIATED EMISSION.....	44
9.6.1 Radiated Emission which fall in the Restricted Band.....	44
9.6.2 Spurious & Harmonic Radiated Emission.....	47
10. PEAK POWER SPECTRUL DENSITY	50
10.1 OPERATING ENVIRONMENT	50
10.2 TEST SET-UP	50
10.3 TEST DATE	50
10.4 TEST DATA FOR 802.11B WLAN MODE.....	51
10.5 TEST DATA FOR 802.11G WLAN MODE	53
10.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	55
11. RADIATED EMISSION TEST	57
11.1 OPERATING ENVIRONMENT	57
11.2 TEST SET-UP	57
11.3 TEST DATE	57
11.4 TEST DATA FOR 30 MHZ ~ 1 000 MHZ	58
11.5 TEST DATA FOR BELOW 30 MHZ	59
11.6 TEST DATA FOR ABOVE 1 GHZ	59
12. LIST OF TEST EQUIPMENT	60

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-211-RWD-001	January 04, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.
 Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
 Contact Person : Jeong Inchang / Chief Research Engineer
 Telephone No. : +82-62-950-0332
 FCC ID : YZP-RBHPB216C1
 Model Name : RBHP-B216C
 Brand Name : LG Innotek Co., Ltd.
 Serial Number : N/A
 Date : January 04, 2021

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Modular Transmitter, BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by DC Power.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Innotek Co., Ltd., Model RBHP-B216C (referred to as the EUT in this report) is a BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 700 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 670 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz (802.11ac(VHT80))
5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))	
	5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))	
	5 775 MHz (802.11ac(VHT80))	
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps
	Bluetooth	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK)
		802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	

RF OUTPUT POWER	Bluetooth LE	1 Mbps	5.44 dBm	
	Bluetooth	1 Mbps	4.05 dBm	
		2 Mbps	1.45 dBm	
		3 Mbps	2.02 dBm	
	WLAN 2.4 GHz	Wi-Fi 802.11b (16.40 dBm) Wi-Fi 802.11g (15.84 dBm) Wi-Fi 802.11n(HT20) (15.05 dBm)		
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	Wi-Fi 802.11a (13.96 dBm) Wi-Fi 802.11n(HT20) (11.80 dBm) Wi-Fi 802.11n(HT40) (10.14 dBm) Wi-Fi 802.11ac(HT80) (12.61 dBm)	
		Antenna 1	Wi-Fi 802.11a (13.92 dBm) Wi-Fi 802.11n(HT20) (10.62 dBm) Wi-Fi 802.11n(HT40) (10.54 dBm) Wi-Fi 802.11ac(HT80) (12.66 dBm)	
		Multiple Antenna	Wi-Fi 802.11n(HT20) (14.24 dBm) Wi-Fi 802.11n(HT40) (13.29 dBm) Wi-Fi 802.11ac(HT80) (12.96 dBm)	
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	Wi-Fi 802.11a (14.42 dBm) Wi-Fi 802.11n(HT20) (14.61 dBm) Wi-Fi 802.11n(HT40) (14.10 dBm) Wi-Fi 802.11ac(HT80) (12.51 dBm)	
		Antenna 1	Wi-Fi 802.11a (14.41 dBm) Wi-Fi 802.11n(HT20) (14.54 dBm) Wi-Fi 802.11n(HT40) (13.56 dBm) Wi-Fi 802.11ac(HT80) (13.21 dBm)	
		Multiple Antenna	Wi-Fi 802.11n(HT20) (17.59 dBm) Wi-Fi 802.11n(HT40) (16.85 dBm) Wi-Fi 802.11ac(HT80) (15.88 dBm)	

RF OUTPUT POWER	5 470 MHz ~ 5 725 MHz Band	Antenna 0	Wi-Fi 802.11a (14.91 dBm) Wi-Fi 802.11n(HT20) (14.94 dBm) Wi-Fi 802.11n(HT40) (14.81 dBm) Wi-Fi 802.11ac(HT80) (12.99 dBm)
		Antenna 1	Wi-Fi 802.11a (14.62 dBm) Wi-Fi 802.11n(HT20) (14.97 dBm) Wi-Fi 802.11n(HT40) (14.32 dBm) Wi-Fi 802.11ac(HT80) (13.44dBm)
		Multiple Antenna	Wi-Fi 802.11n(HT20) (17.88 dBm) Wi-Fi 802.11n(HT40) (17.58 dBm) Wi-Fi 802.11ac(HT80) (16.23 dBm)
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	Wi-Fi 802.11a (14.58 dBm) Wi-Fi 802.11n(HT20) (14.27 dBm) Wi-Fi 802.11n(HT40) (13.88 dBm) Wi-Fi 802.11ac(HT80) (12.80 dBm)
		Antenna 1	Wi-Fi 802.11a (14.74 dBm) Wi-Fi 802.11n(HT20) (14.84 dBm) Wi-Fi 802.11n(HT40) (14.69 dBm) Wi-Fi 802.11ac(HT80) (13.88 dBm)
		Multiple Antenna	Wi-Fi 802.11n(HT20) (17.57 dBm) Wi-Fi 802.11n(HT40) (17.31 dBm) Wi-Fi 802.11ac(HT80) (16.38 dBm)

ANTENNA TYPE	WLAN 2.4 GHz Band & WLAN 5 GHz Band		PCB Antenna	
	Bluetooth & WLAN 5 GHz Band		PIFA antenna	
ANTENNA GAIN	Bluetooth LE	2.20 dBi		
	Bluetooth	2.20 dBi		
	WLAN 2.4 GHz	4.80 dBi		
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	5.40 dBi	
		Antenna 1	5.70 dBi	
		Multiple Antenna	8.56 dBi	
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	5.60 dBi	
		Antenna 1	4.80 dBi	
		Multiple Antenna	8.23 dBi	
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	5.70 dBi	
		Antenna 1	5.30 dBi	
		Multiple Antenna	8.51 dBi	
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	5.20 dBi	
		Antenna 1	5.40 dBi	
		Multiple Antenna	8.31 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		37.4 MHz		
DFS FUNCTION		Slave without radar detection		

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Innotek Co., Ltd.	RBHA-B2168_RDK_Rev0.1	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
RBHP-B216C	LG Innotek Co., Ltd.	BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module (EUT)	Notebook PC
PP11L	DELL	Notebook PC	EUT
WEA504i	Samsung Electronics Co Ltd	WLAN Access Point (FCC ID.: A3LWEA504I)	EUT

5.3 Mode of operation during the test

Modulation	DATA RATE	OUTPUT POWER[dBm]
802.11 b (Middle Channel)	1 Mbps	16.40
	2 Mbps	16.27
	5.5 Mbps	15.88
	11 Mbps	15.65
802.11 g (Middle Channel)	6 Mbps	15.84
	9 Mbps	15.49
	12 Mbps	15.29
	18 Mbps	14.90
	24 Mbps	14.51
	36 Mbps	14.39
	48 Mbps	14.02
	54 Mbps	13.92
HT 20 (Middle Channel)	6.5 Mbps	15.05
	13 Mbps	14.81
	19.5 Mbps	14.45
	26 Mbps	14.28
	39 Mbps	13.99
	52 Mbps	13.72
	58.5 Mbps	13.59
	65 Mbps	13.22

The worse case data rate for each modulation is determined 1 Mbps for IEEE 802.11b, 6 Mbps for IEEE 802.11g, 6.5 Mbps for HT20

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC Power.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is WLAN 2.4 GHz Band & WLAN 5 GHz Band is PCB antenna and Bluetooth & Bluetooth LE & WLAN 5 GHz Band is PIFA antenna.

It consists of the FAKRA Type RF cable between the EUT and the antenna, and the connector is molded so that it cannot be replaced by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by DC Power.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MIMIMUM 6 dB BANDWIDTH


7.1 Operating environment

Temperature : 23 °C

Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

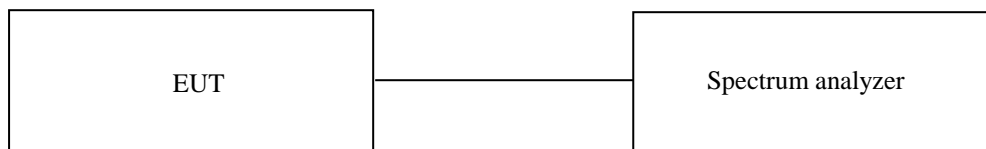

7.3 Test Date


December 03, 2020 ~ December 09, 2020


7.4 Test data for 802.11b WLAN Mode

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412	8.00	0.5	7.50
Middle	2 442	8.00	0.5	7.50
High	2 462	8.00	0.5	7.50

Remark. Margin = Measured Value - Limit

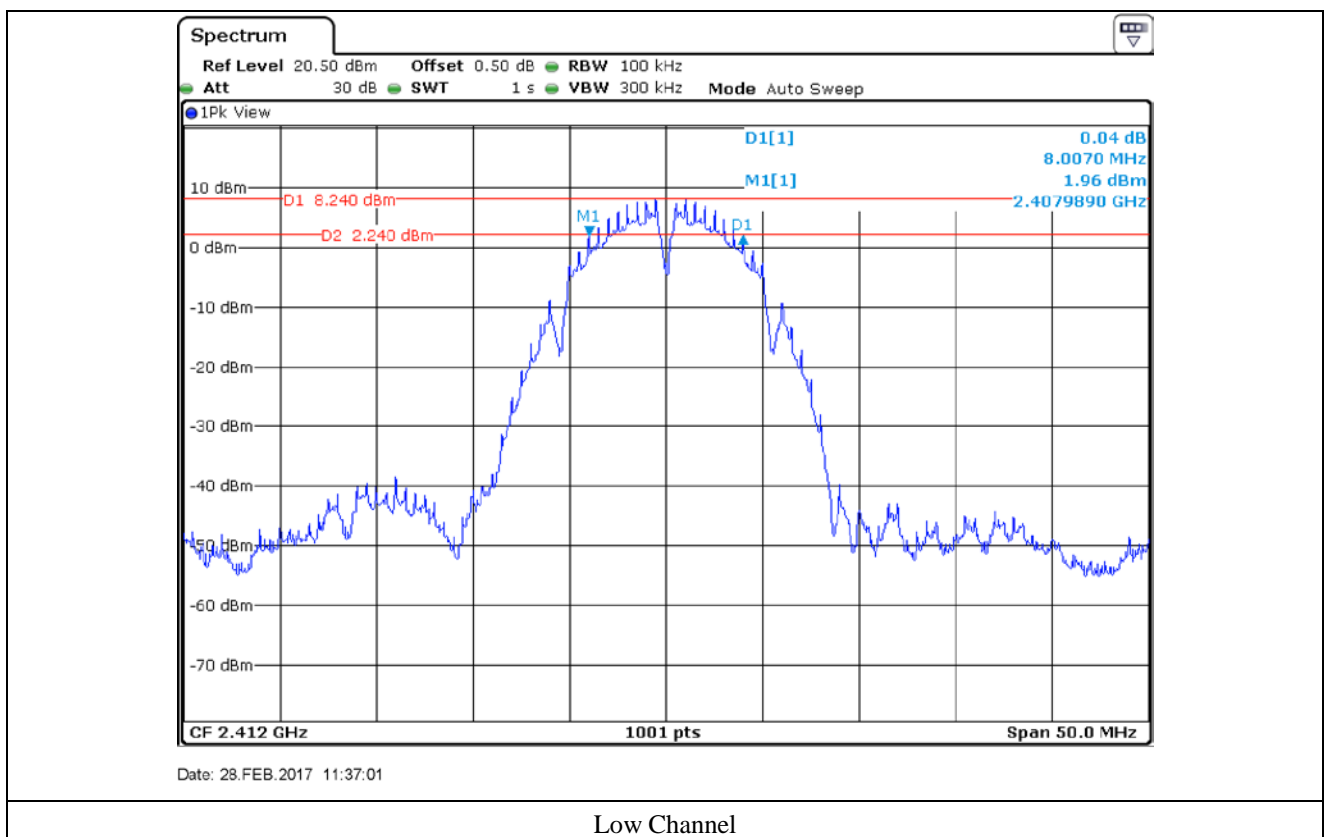

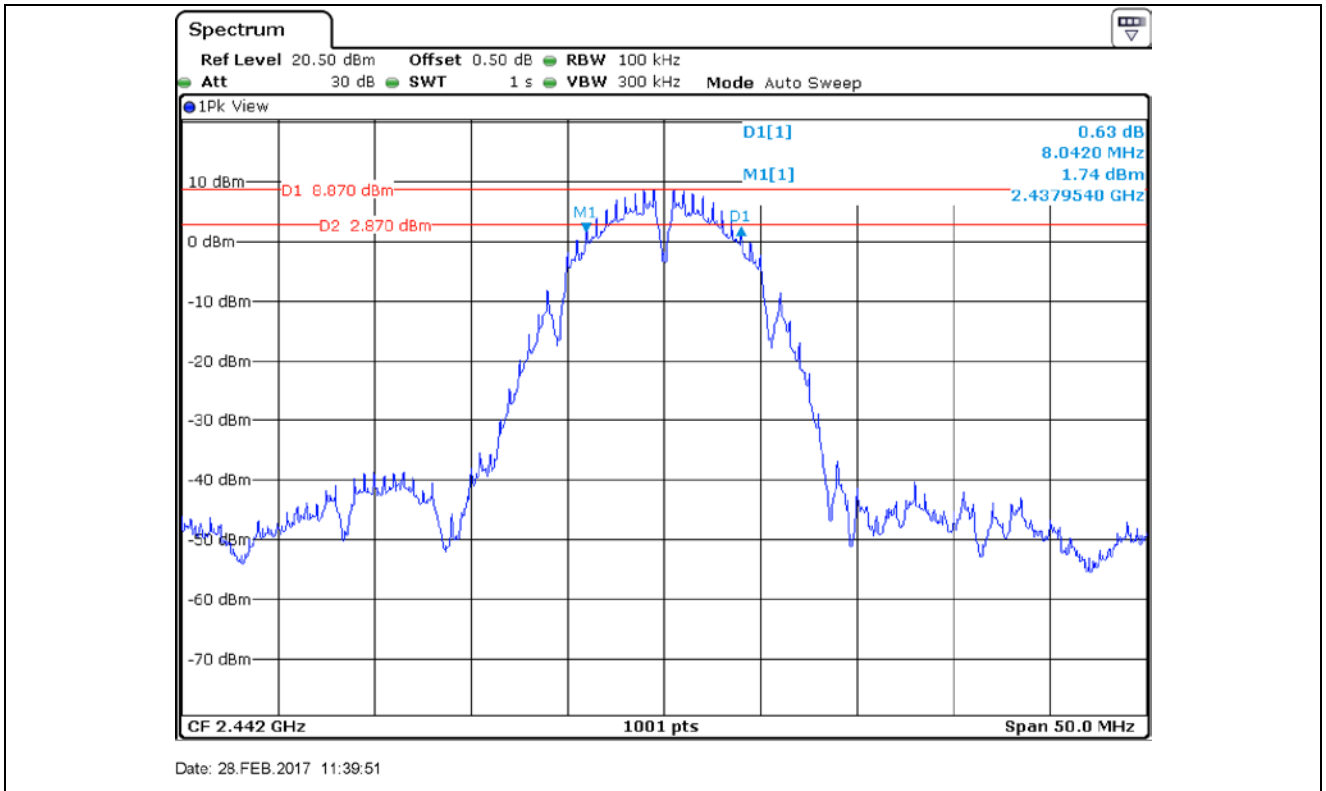

Middle Channel

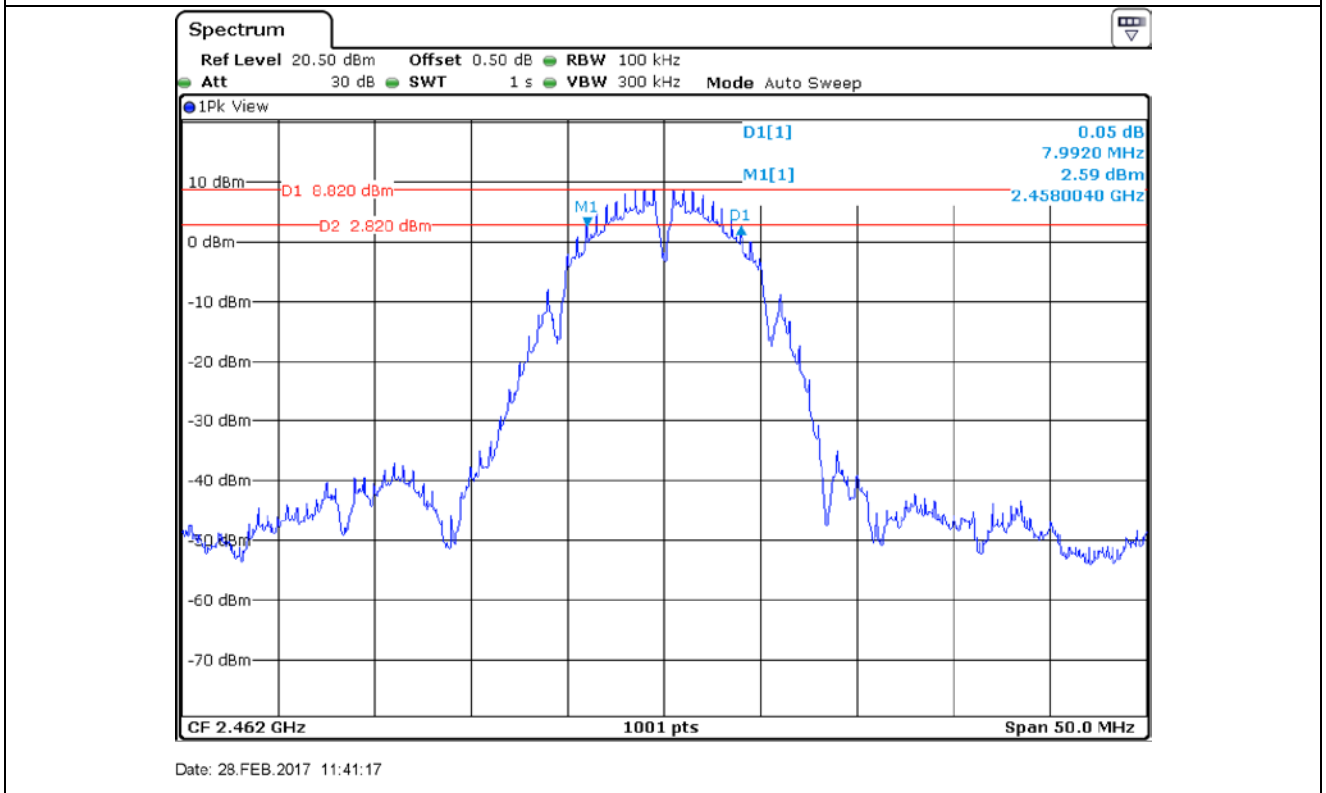


High Channel


7.5 Test data for 802.11g WLAN Mode

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412	16.43	0.5	15.93
Middle	2 442	16.43	0.5	15.93
High	2 462	16.43	0.5	15.93

Remark. Margin = Measured Value - Limit

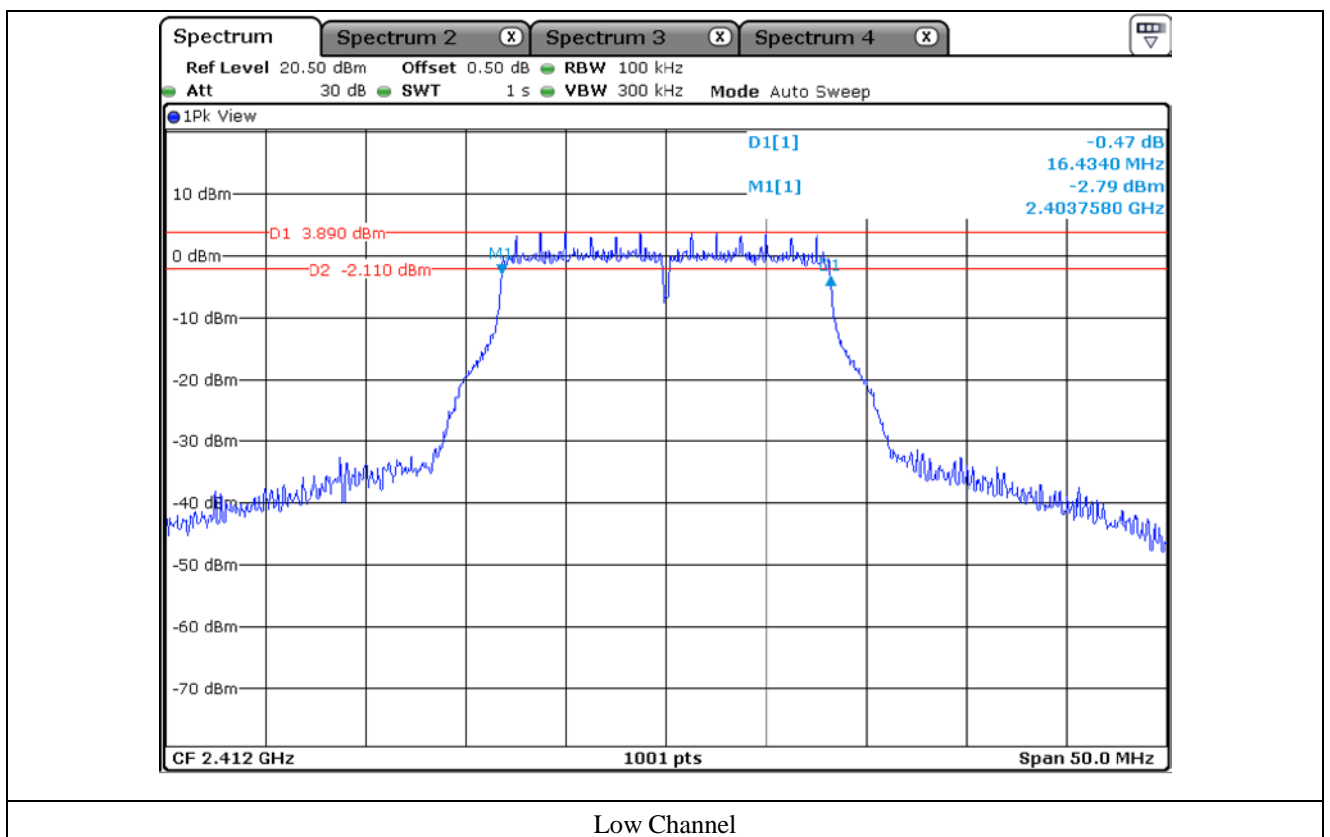

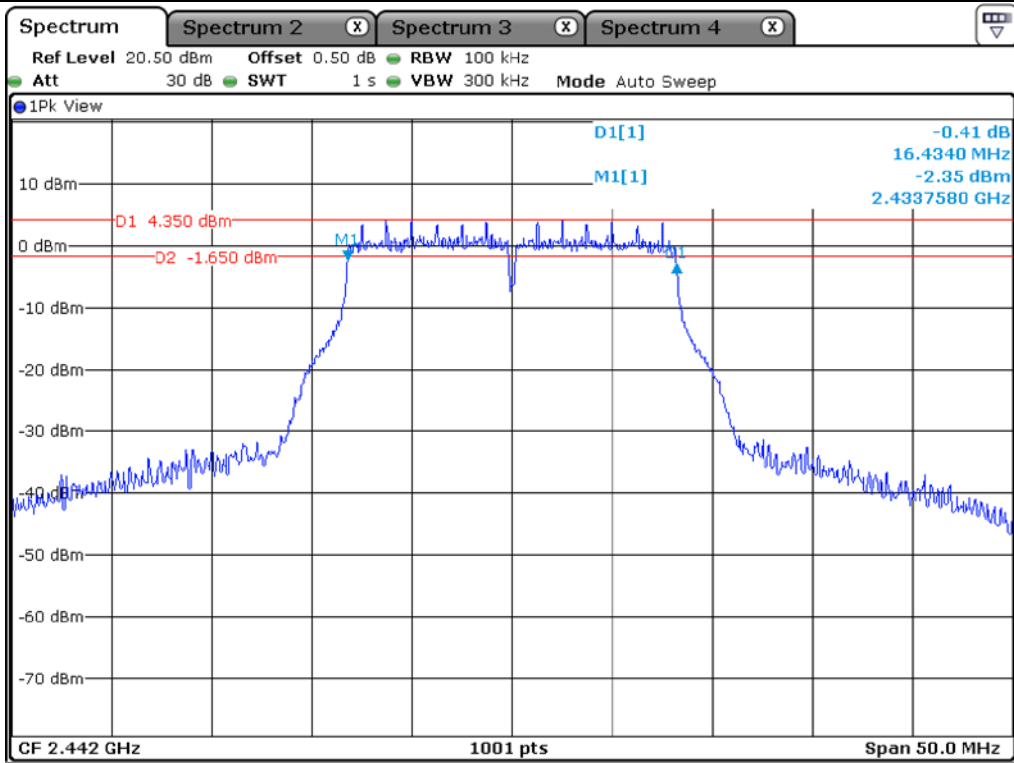

Middle Channel

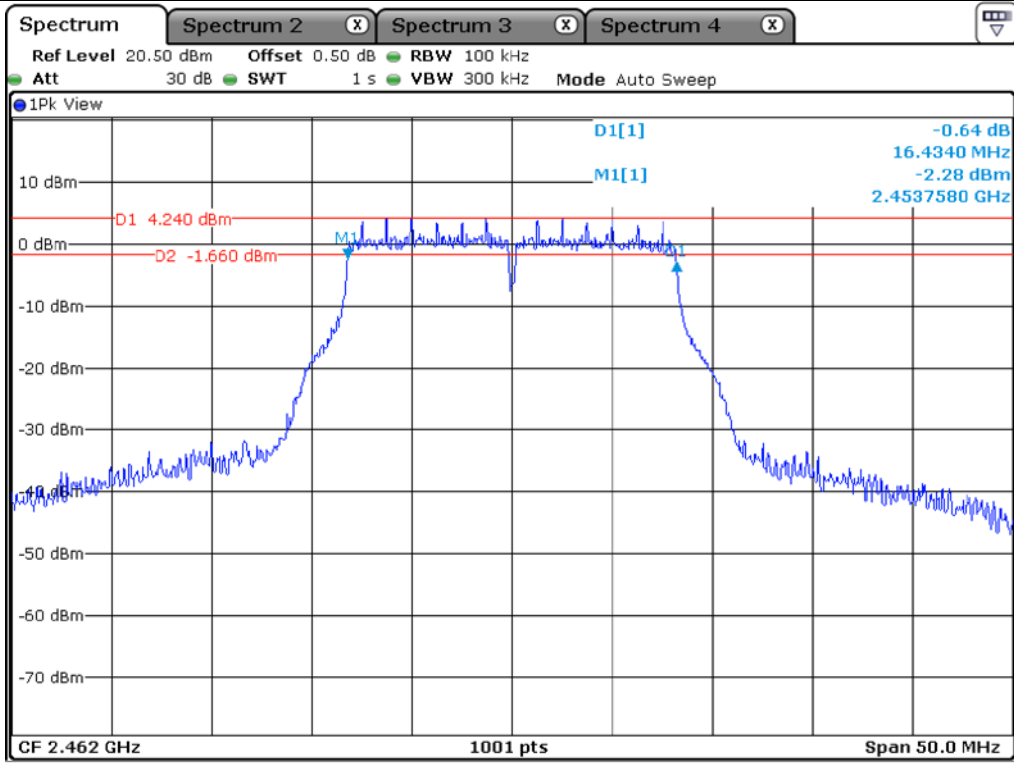


High Channel


7.6 Test data for 802.11n_HT20 WLAN Mode

- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412	17.63	0.5	17.13
Middle	2 442	17.63	0.5	17.13
High	2 462	17.63	0.5	17.13

Remark. Margin = Measured Value - Limit

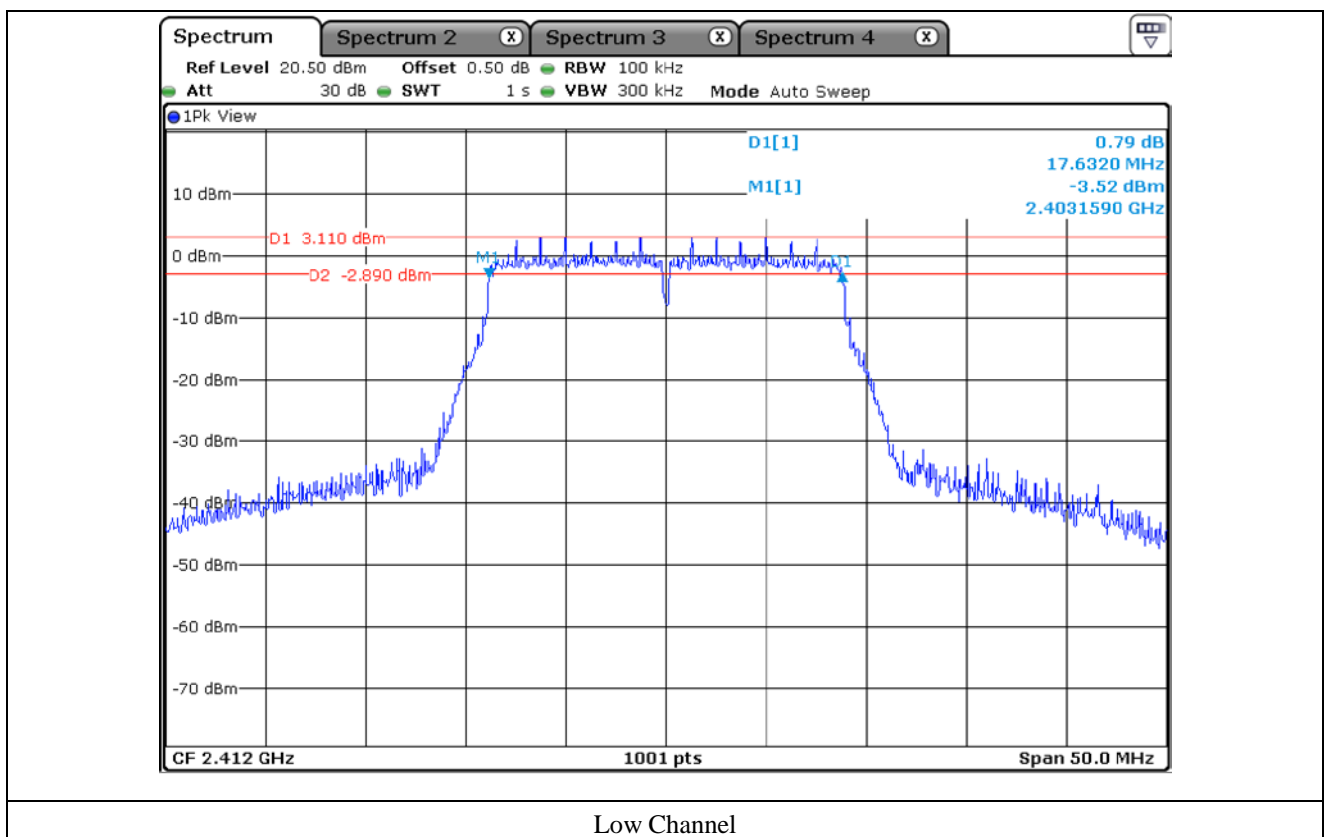

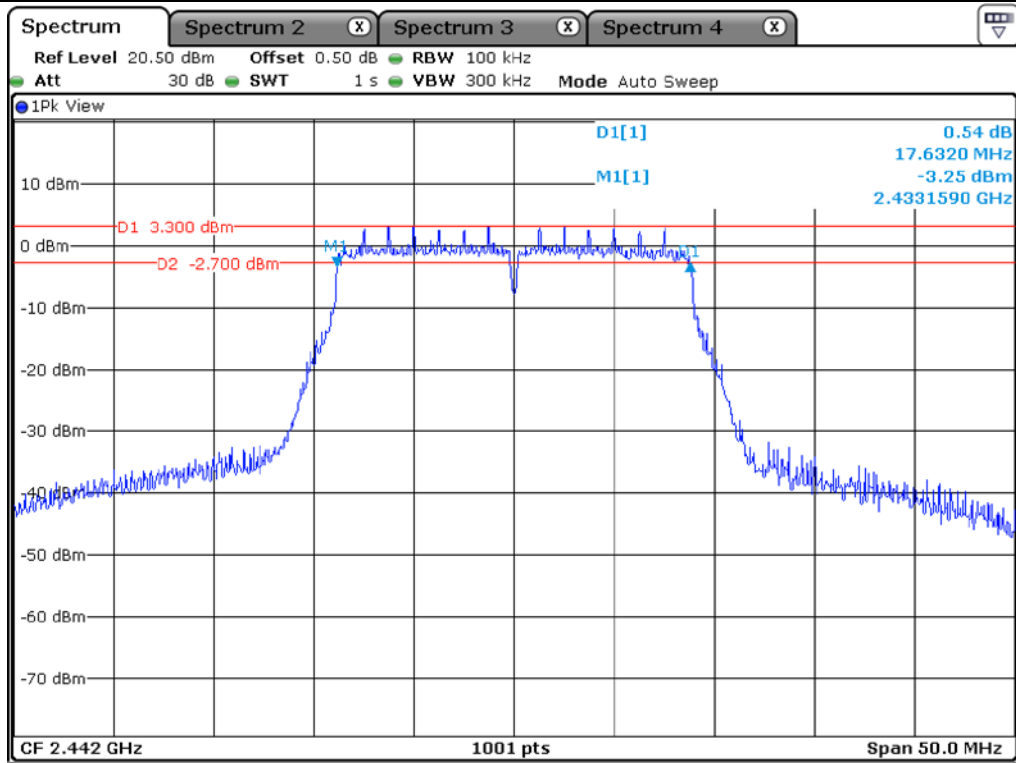

Middle Channel

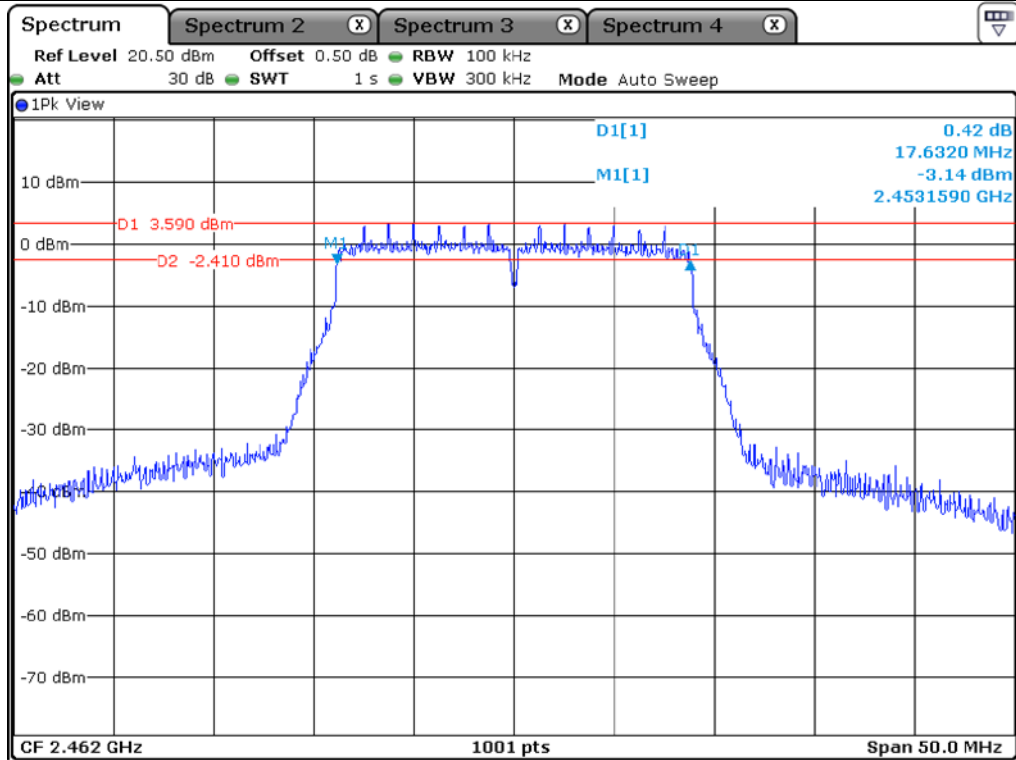

High Channel

8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment


Temperature : 23 °C

Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to 1 MHz, the video bandwidth is set to 3 times the resolution bandwidth.

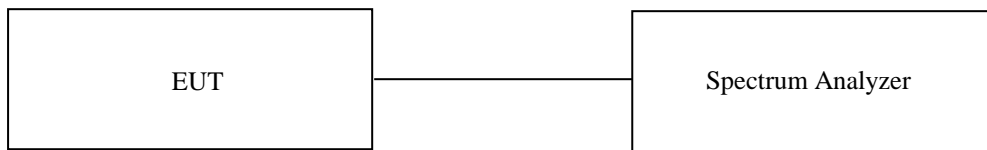

8.3 Test Date


December 03, 2020 ~ December 09, 2020

8.4 Test data for 802.11b WLAN Mode


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412	8.00	16.05	30	13.95
MIDDLE	2 442	8.00	16.39	30	13.61
HIGH	2 462	8.00	16.40	30	13.60


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

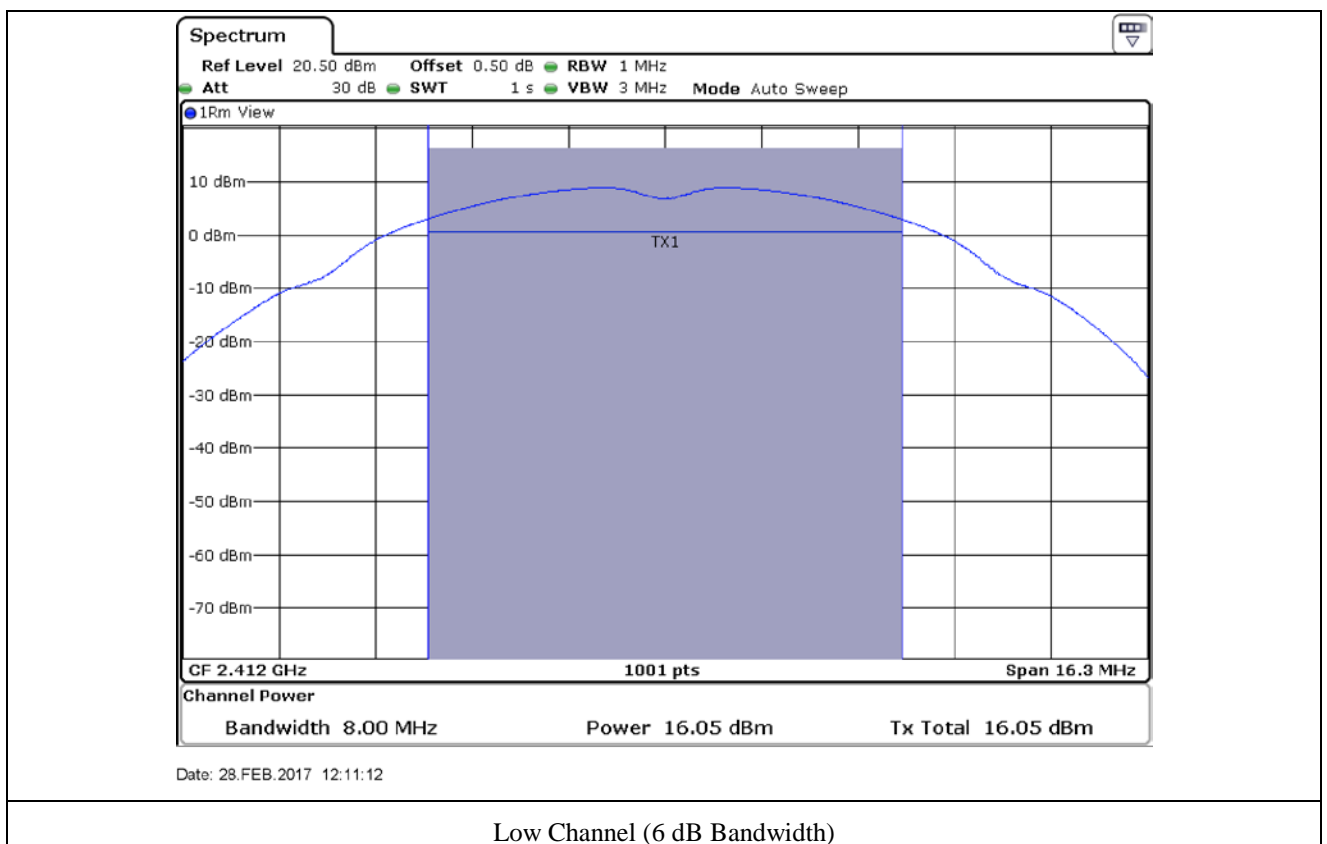

Low Channel (6 dB Bandwidth)

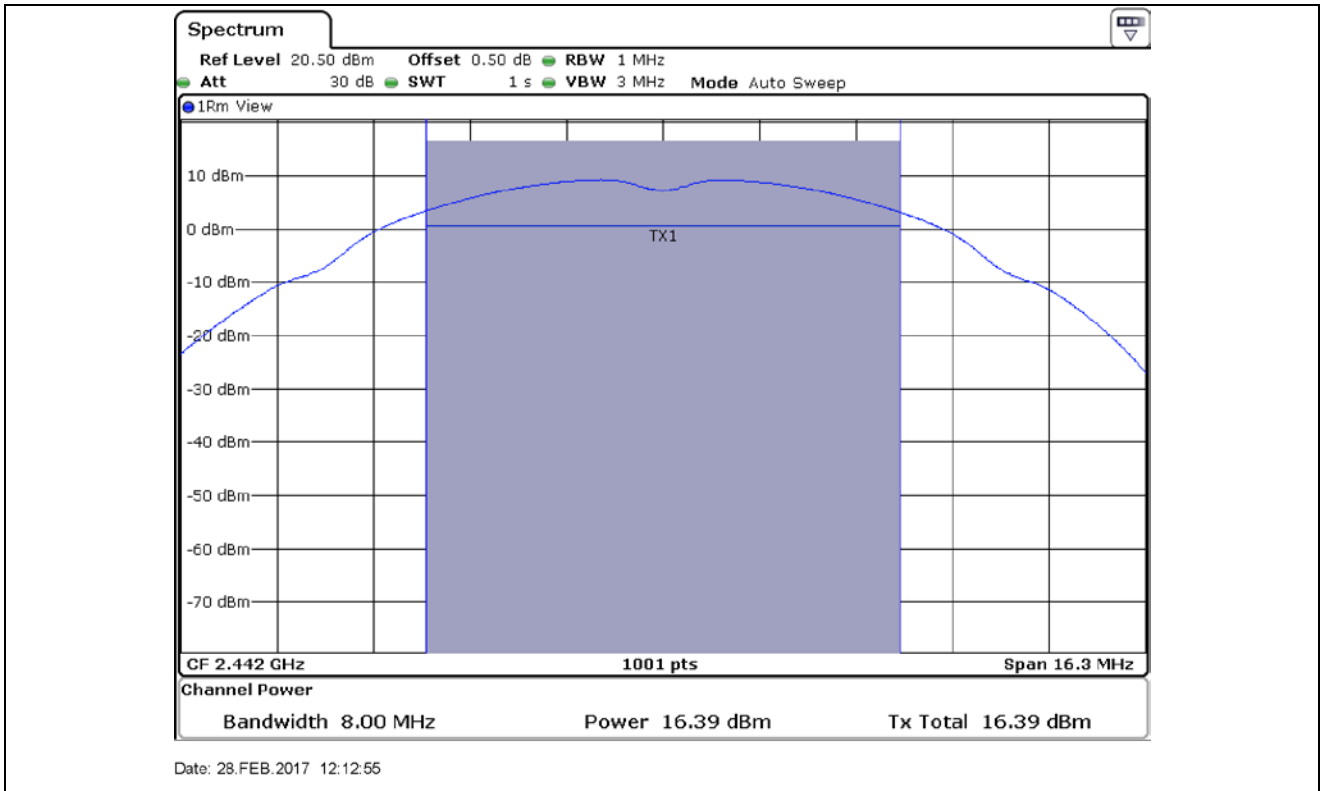

Middle Channel (6 dB Bandwidth)

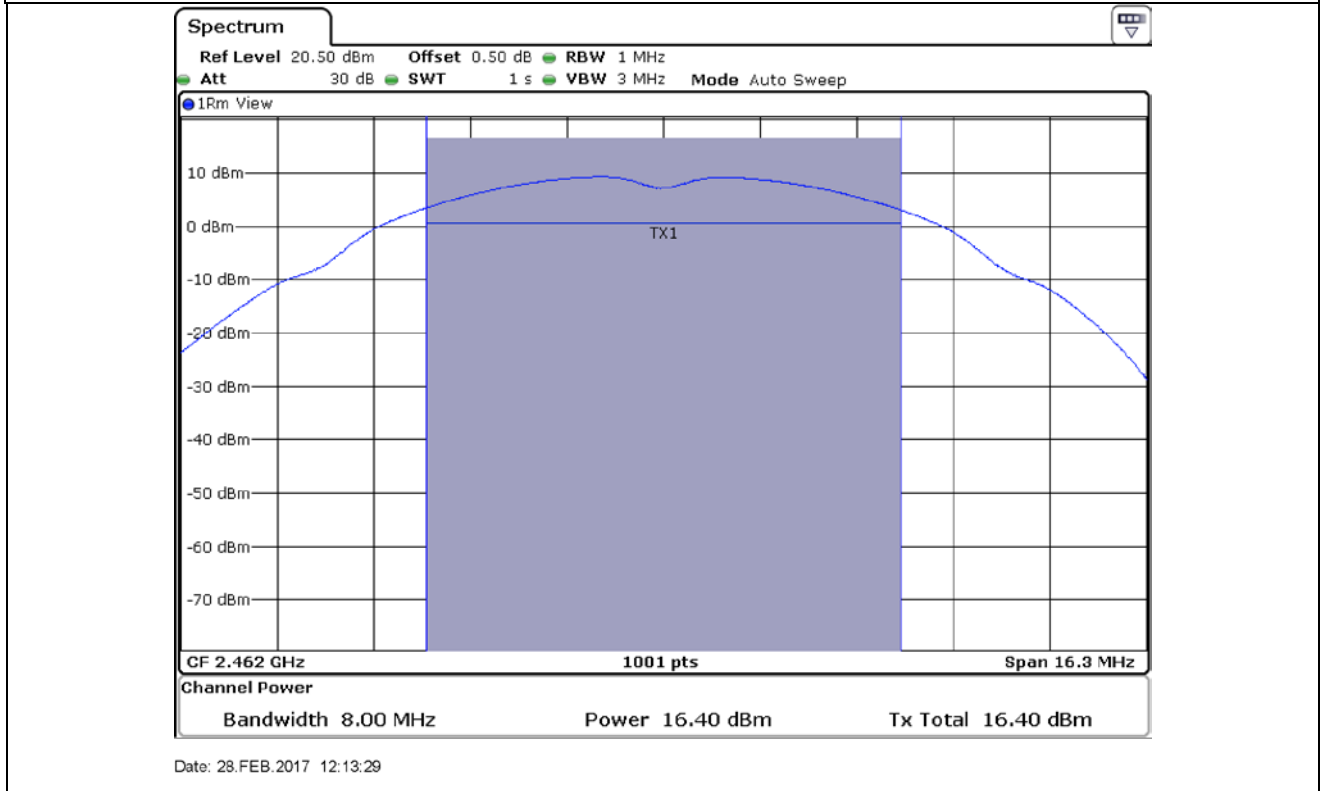


High Channel (6 dB Bandwidth)


8.5 Test data for 802.11g WLAN Mode

- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412	16.43	15.52	30	14.48
MIDDLE	2 442	16.43	15.84	30	14.16
HIGH	2 462	16.43	15.78	30	14.22

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

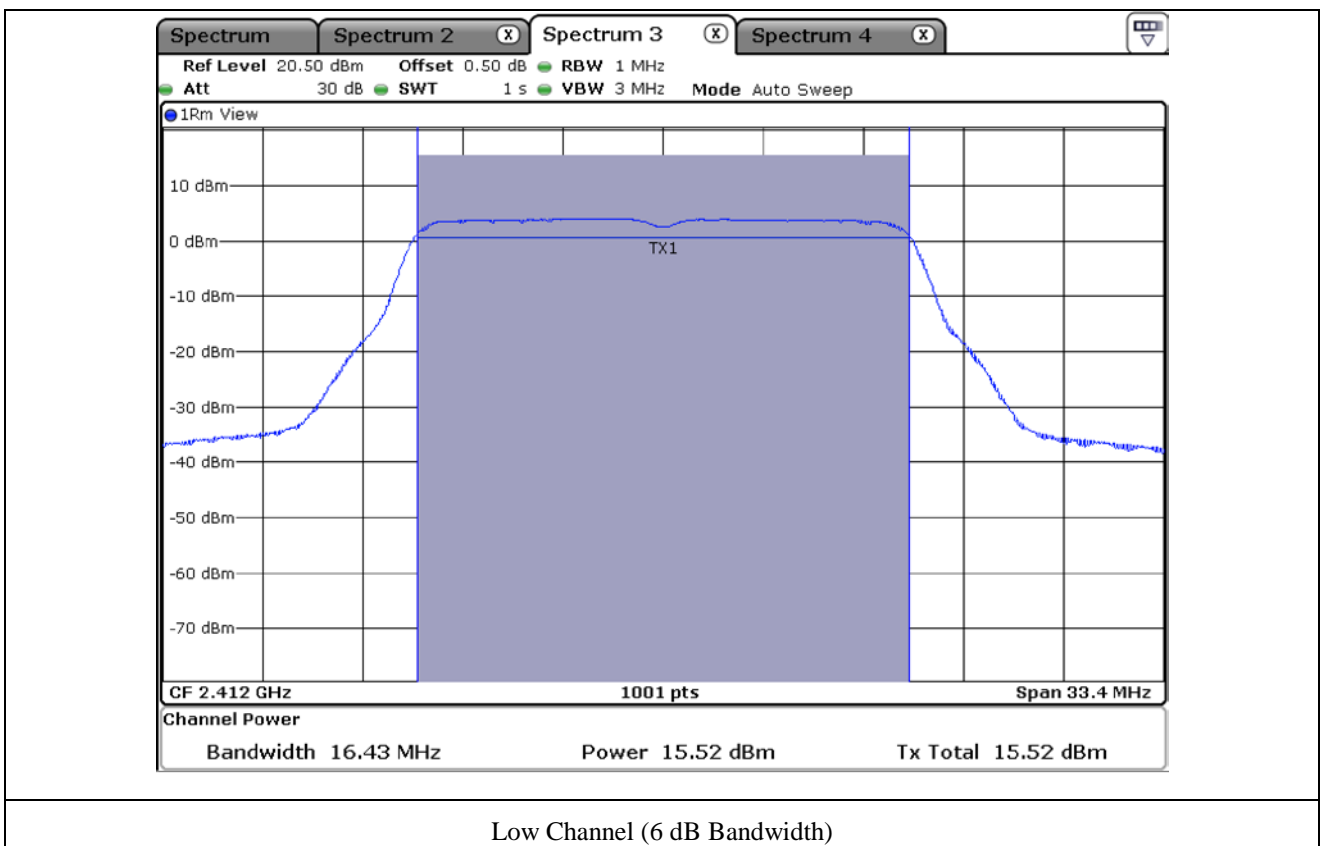

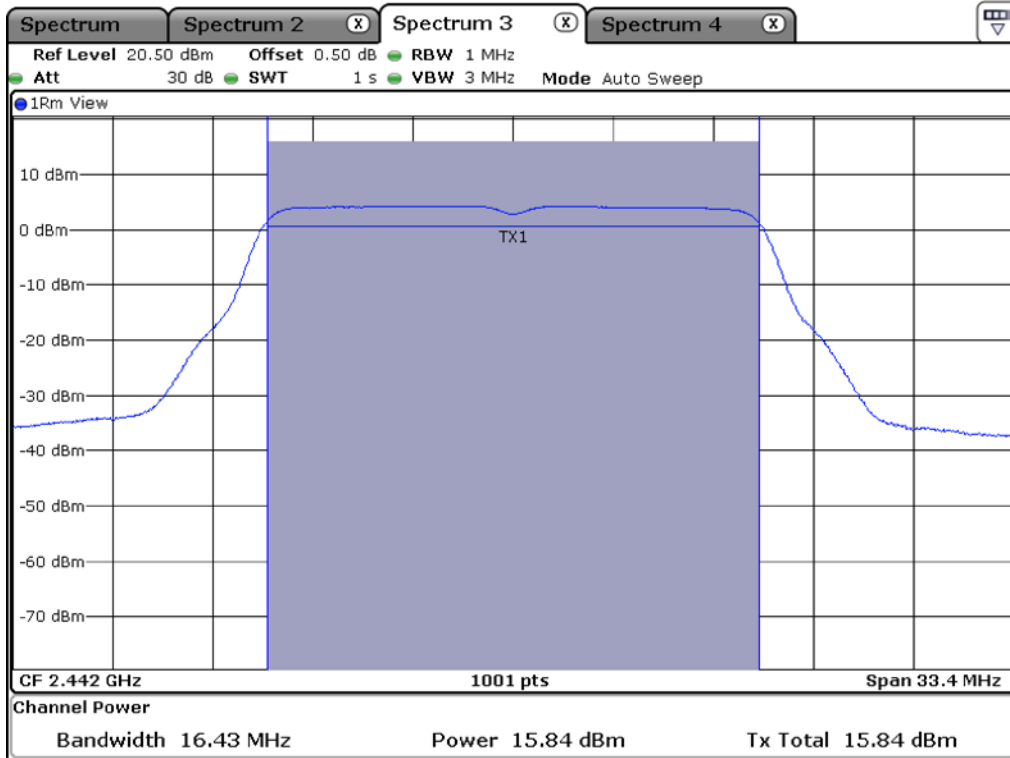

Middle Channel (6 dB Bandwidth)

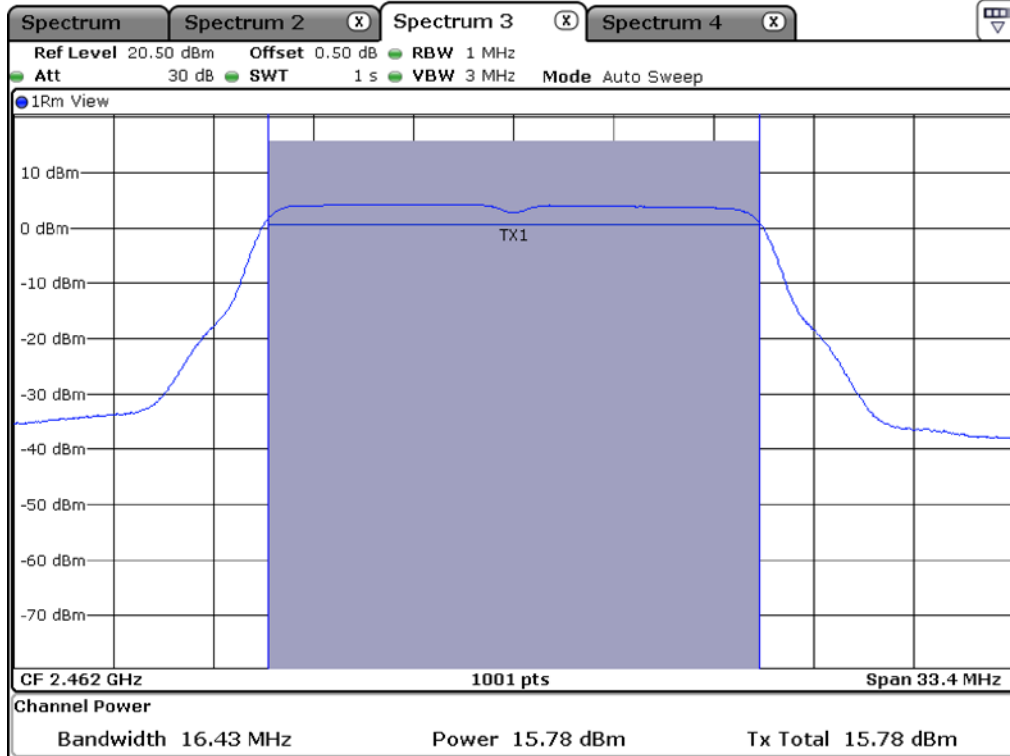


High Channel (6 dB Bandwidth)


8.6 Test data for 802.11n_HT20 WLAN Mode

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412	17.63	14.70	30	15.30
MIDDLE	2 442	17.63	14.82	30	15.18
HIGH	2 462	17.63	15.05	30	14.95

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

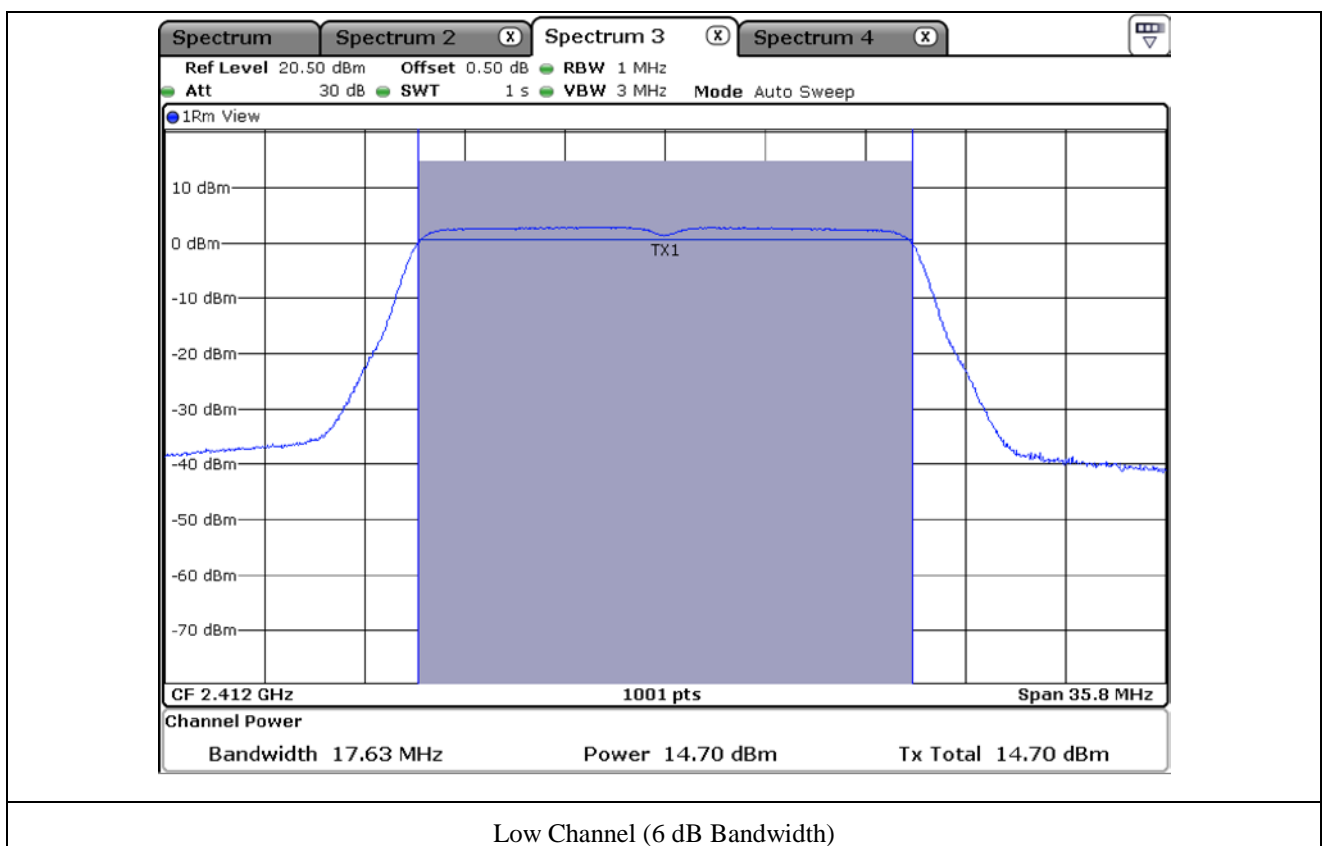

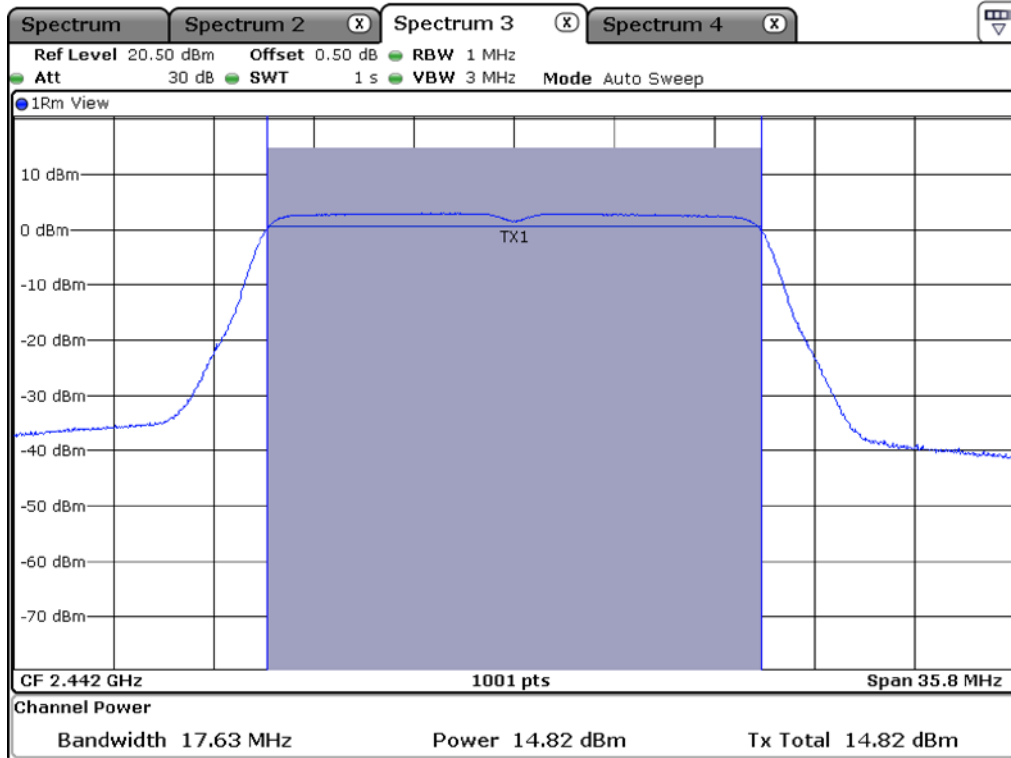

Middle Channel (6 dB Bandwidth)

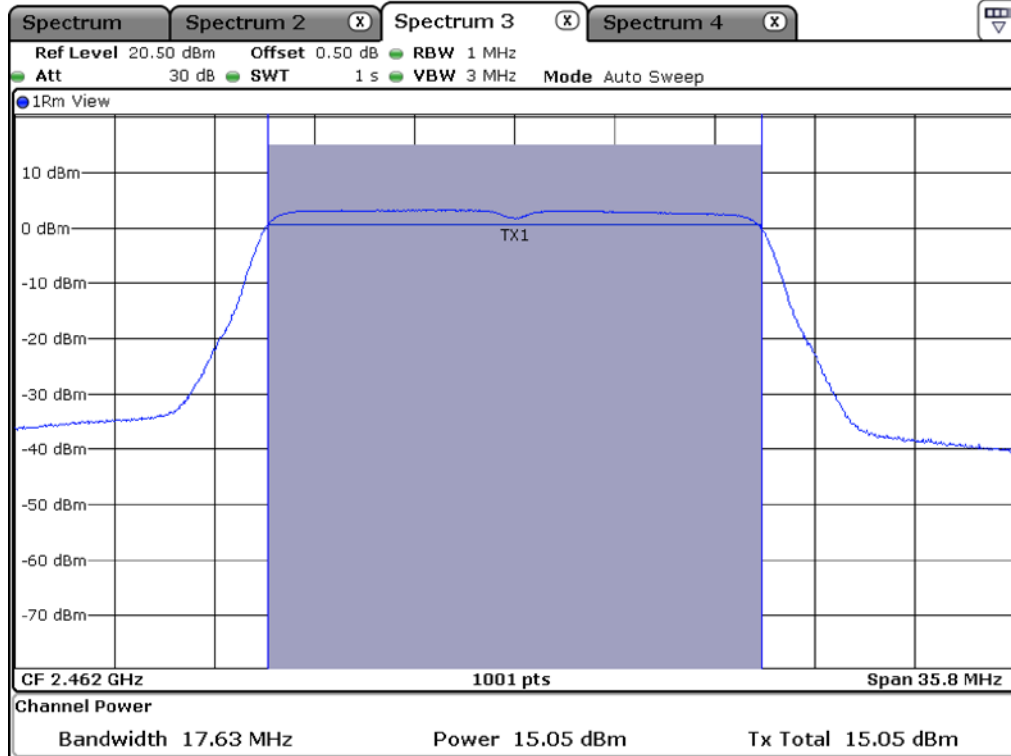

High Channel (6 dB Bandwidth)

9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23 °C

Relative humidity : 45 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.



9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test Date


December 03, 2020 ~ December 09, 2020

9.5 Test data for conducted emission


9.5.1 Test data for 802.11b WLAN Mode

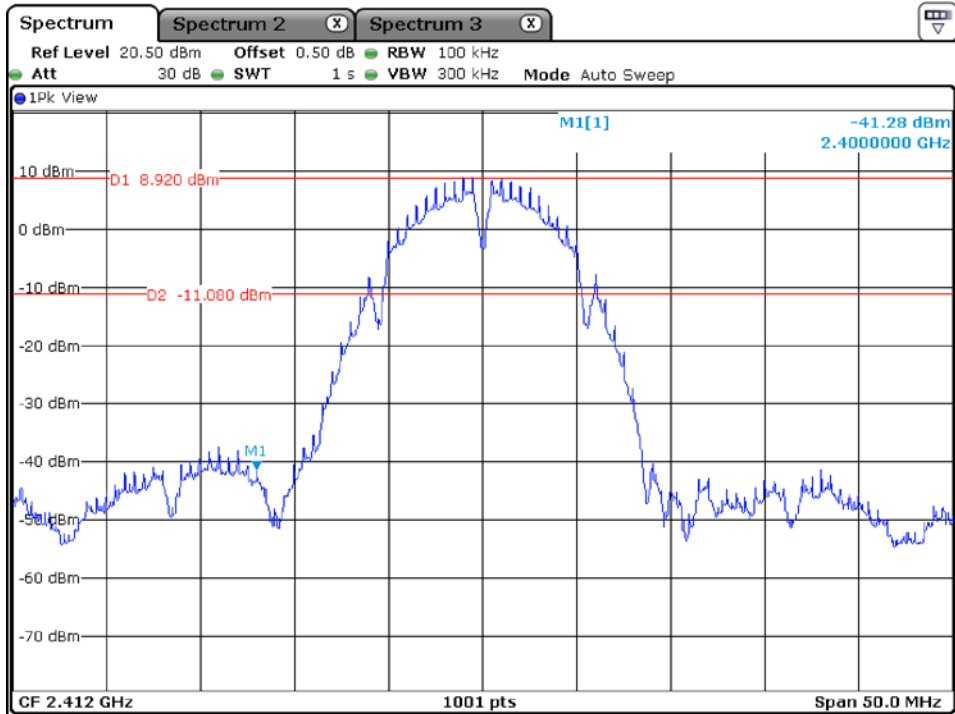


Low Channel

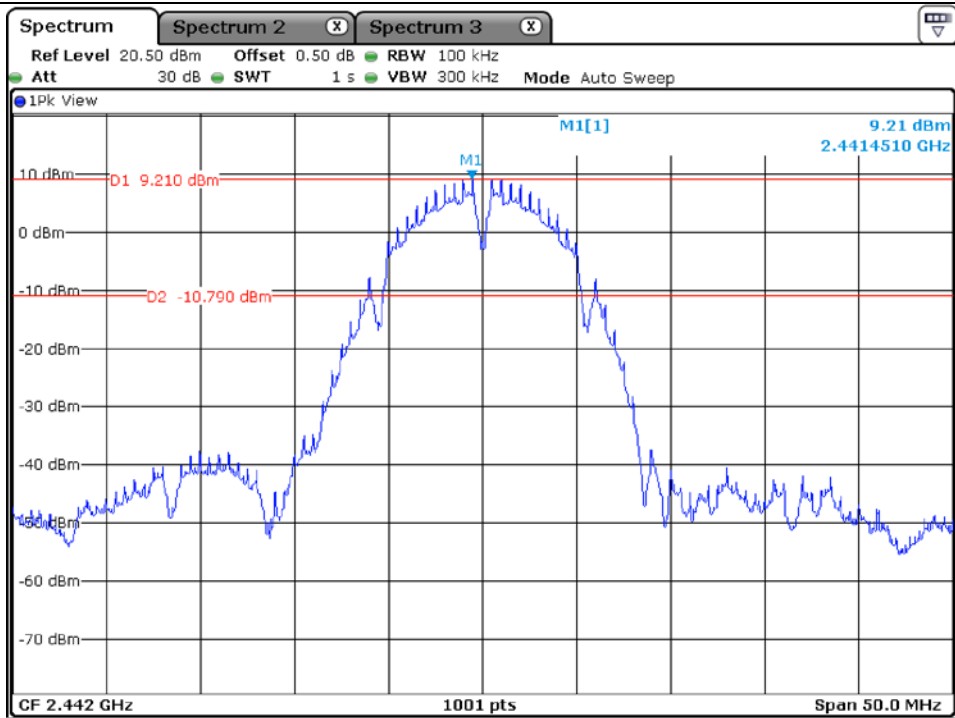


Middle Channel

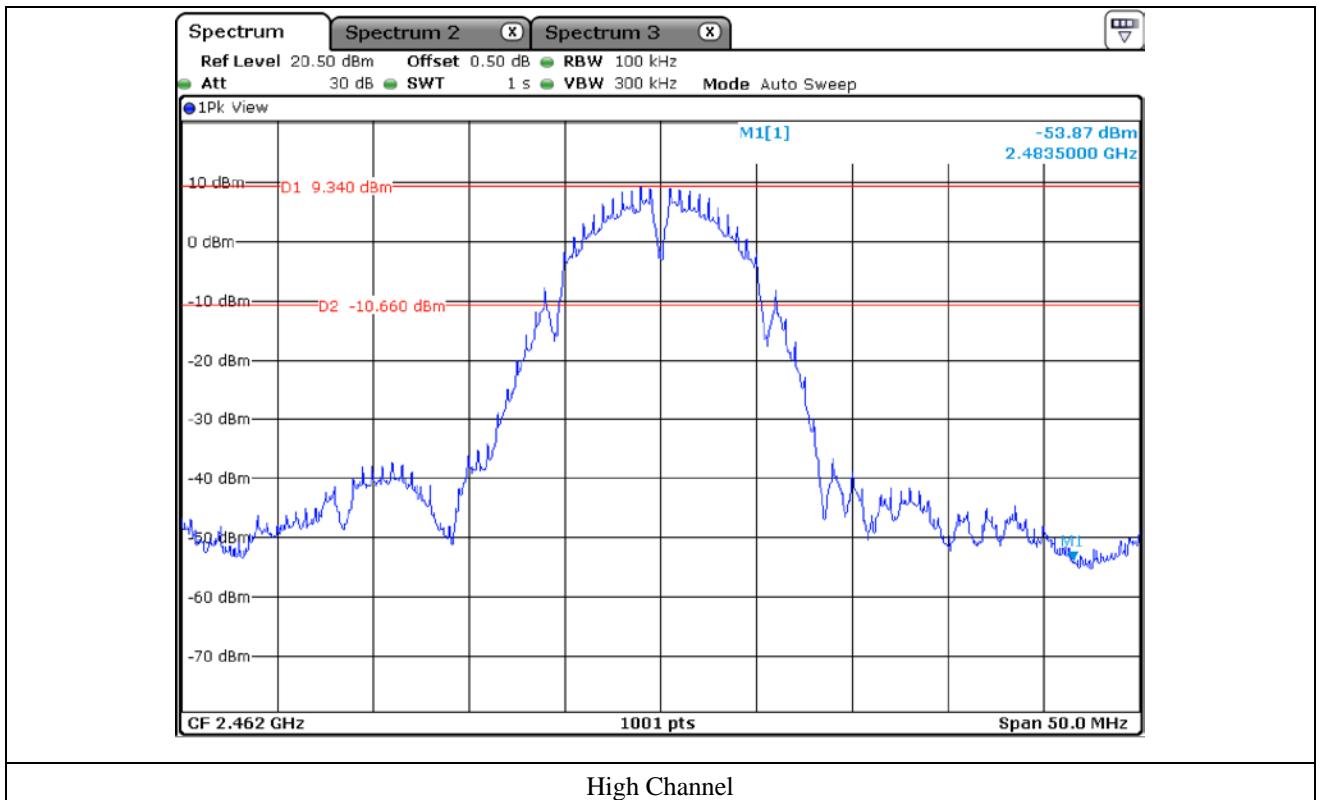


High Channel

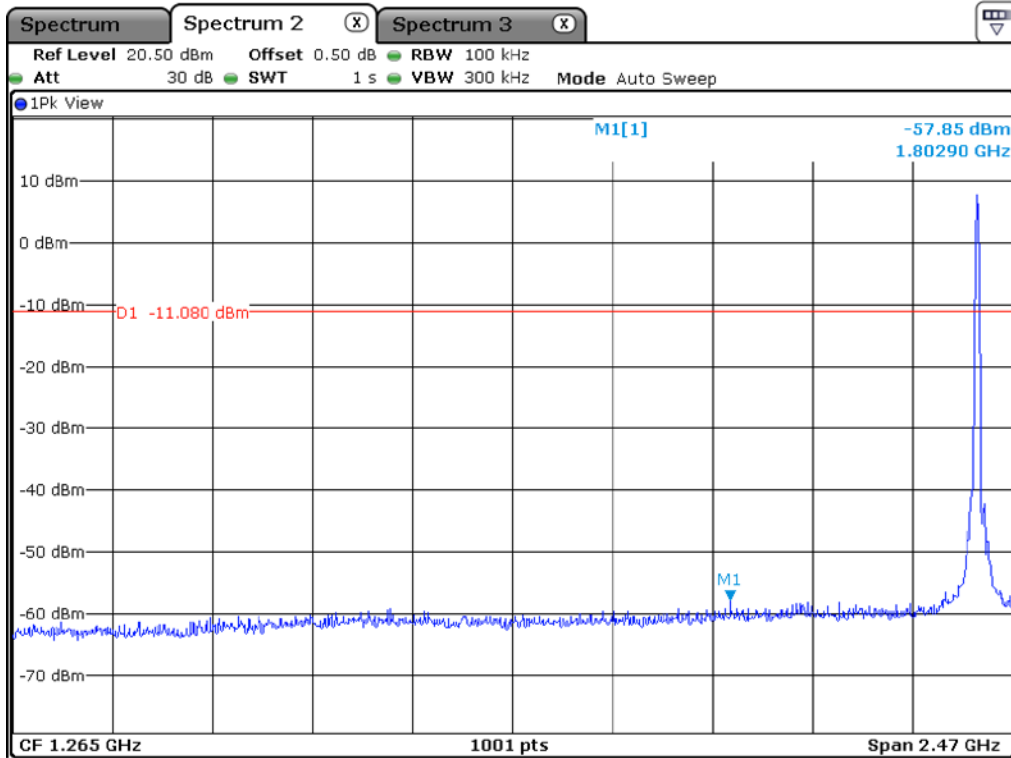


Low Channel

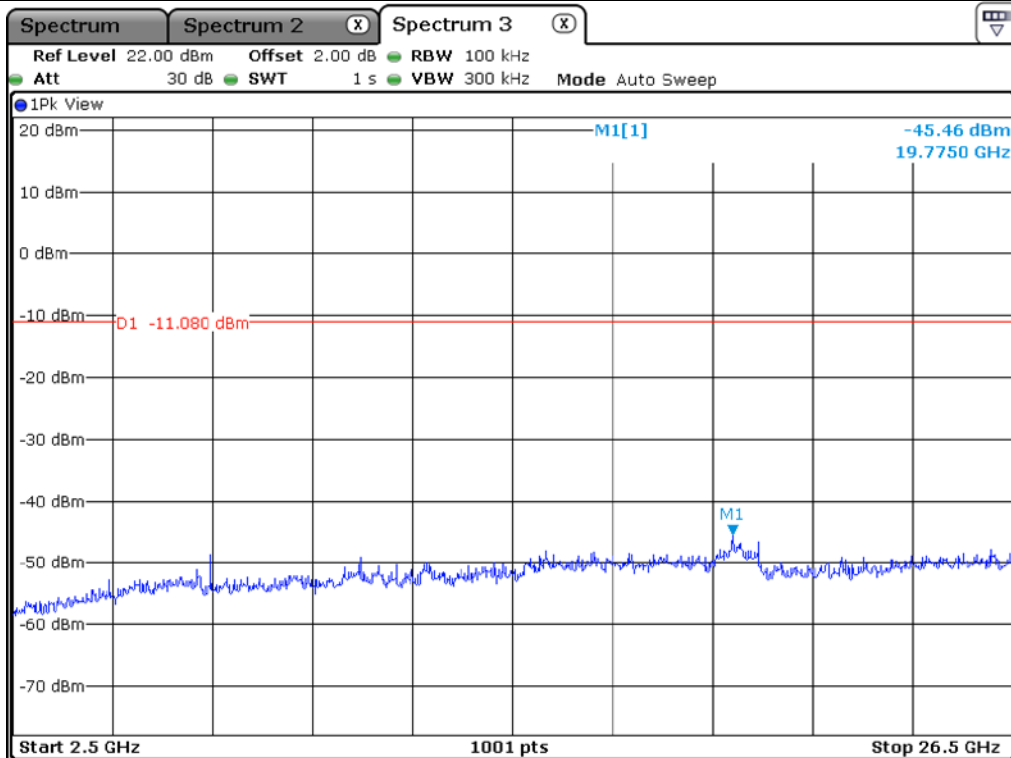


Low Channel

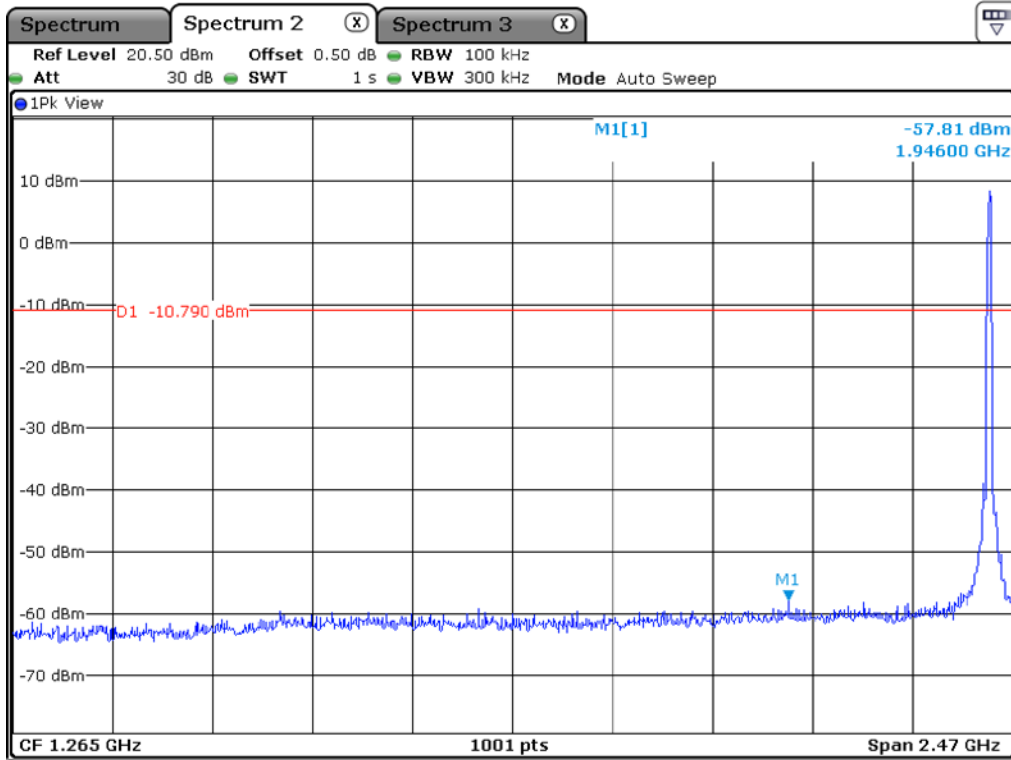


Middle Channel

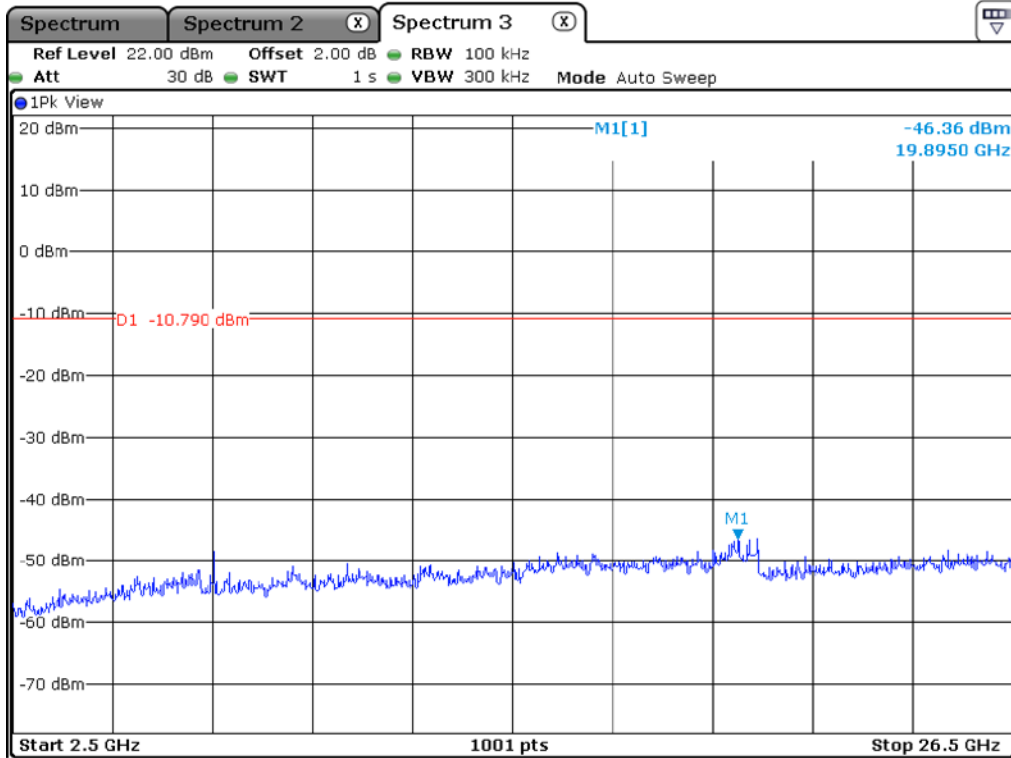

Middle Channel

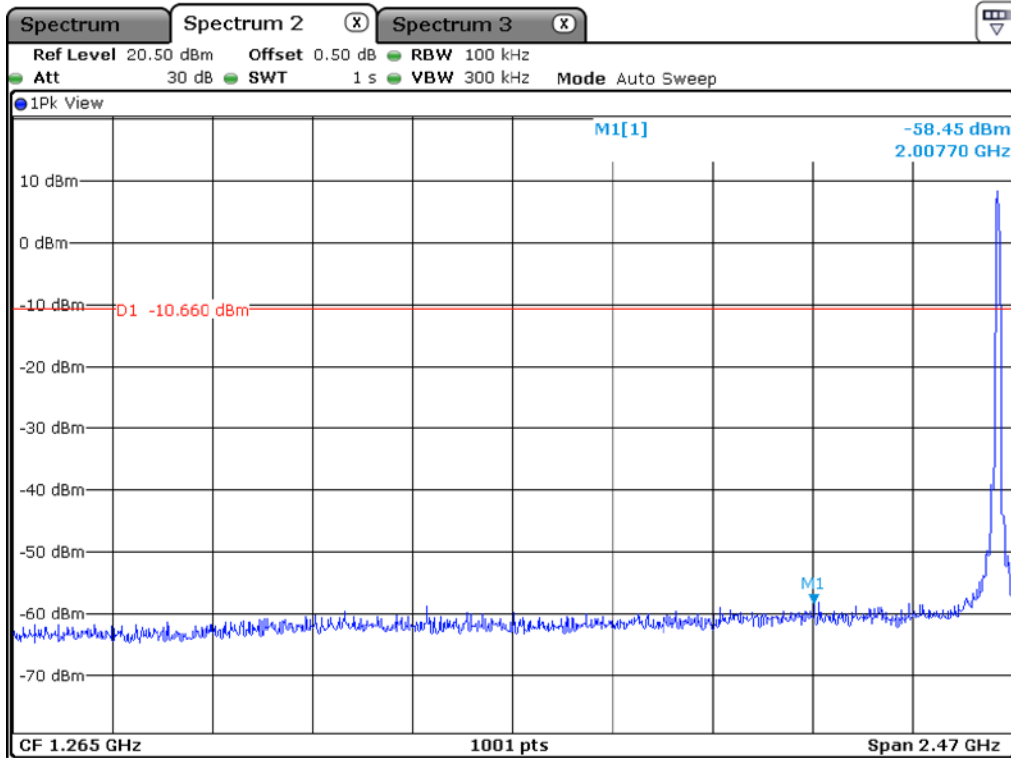


High Channel

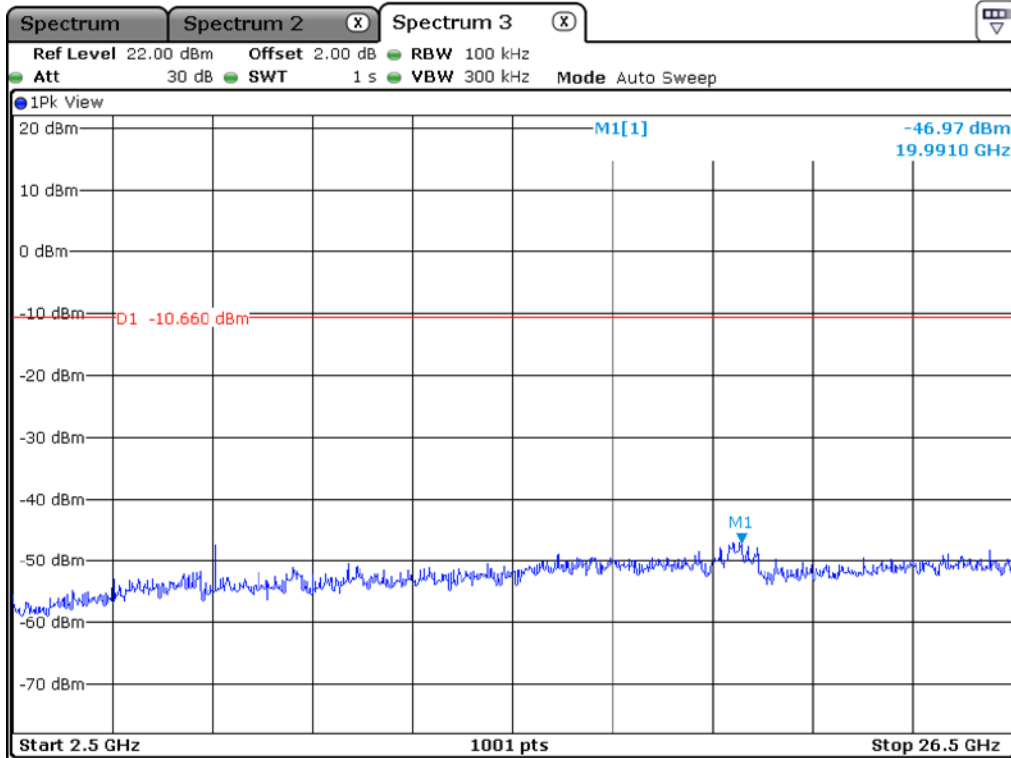


High Channel


9.5.2 Test data for 802.11g WLAN Mode

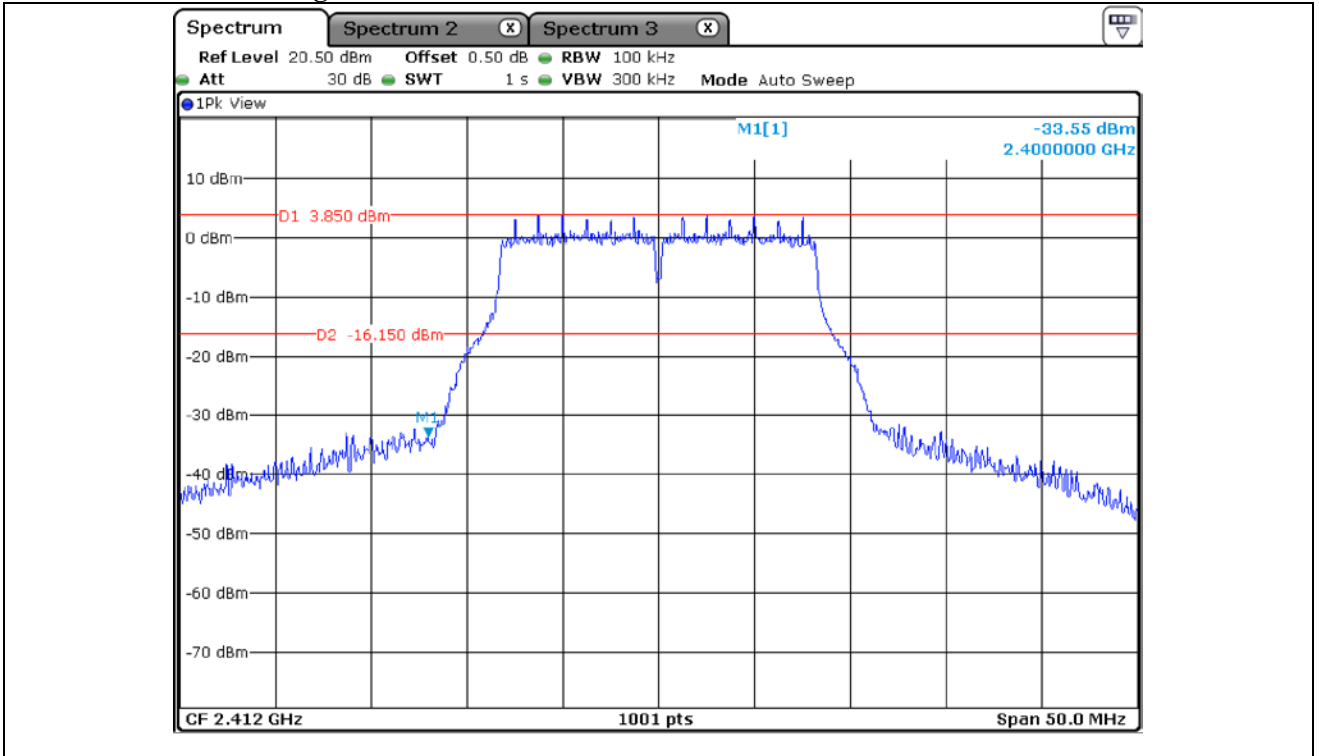


Low Channel

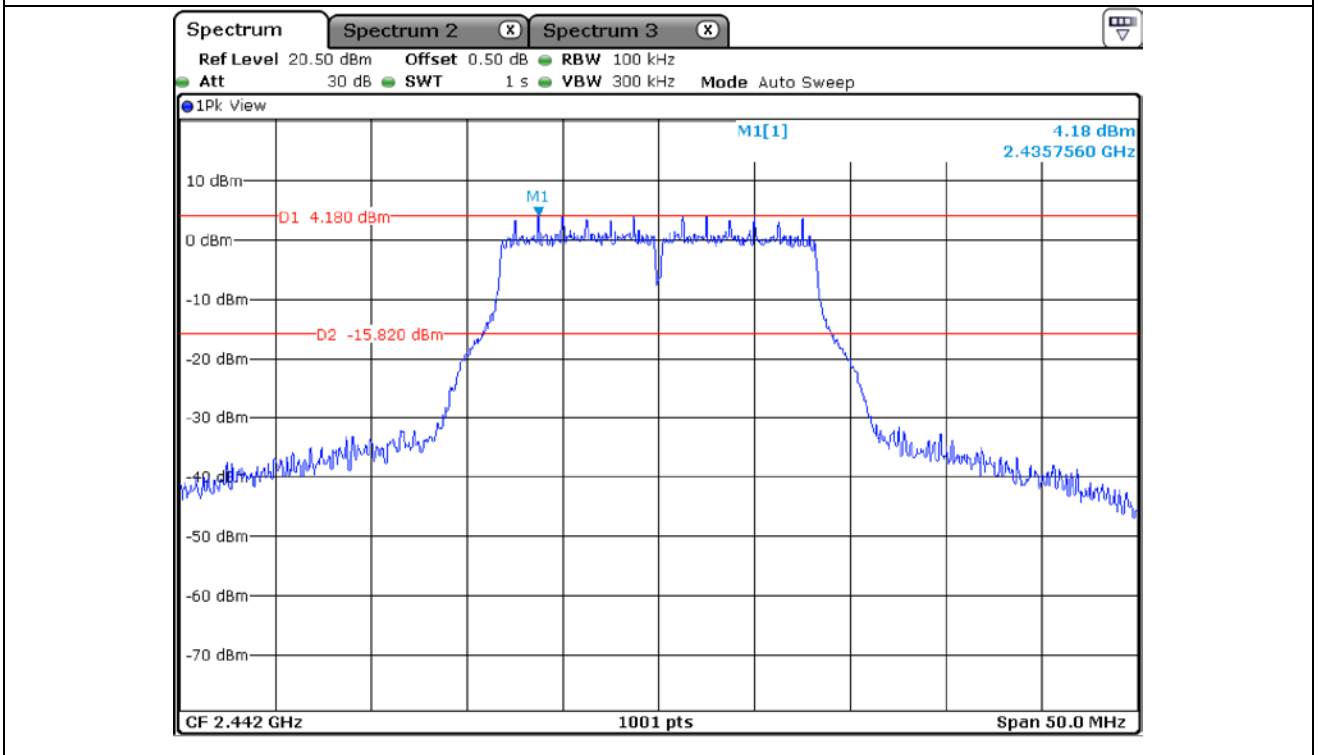


Middle Channel

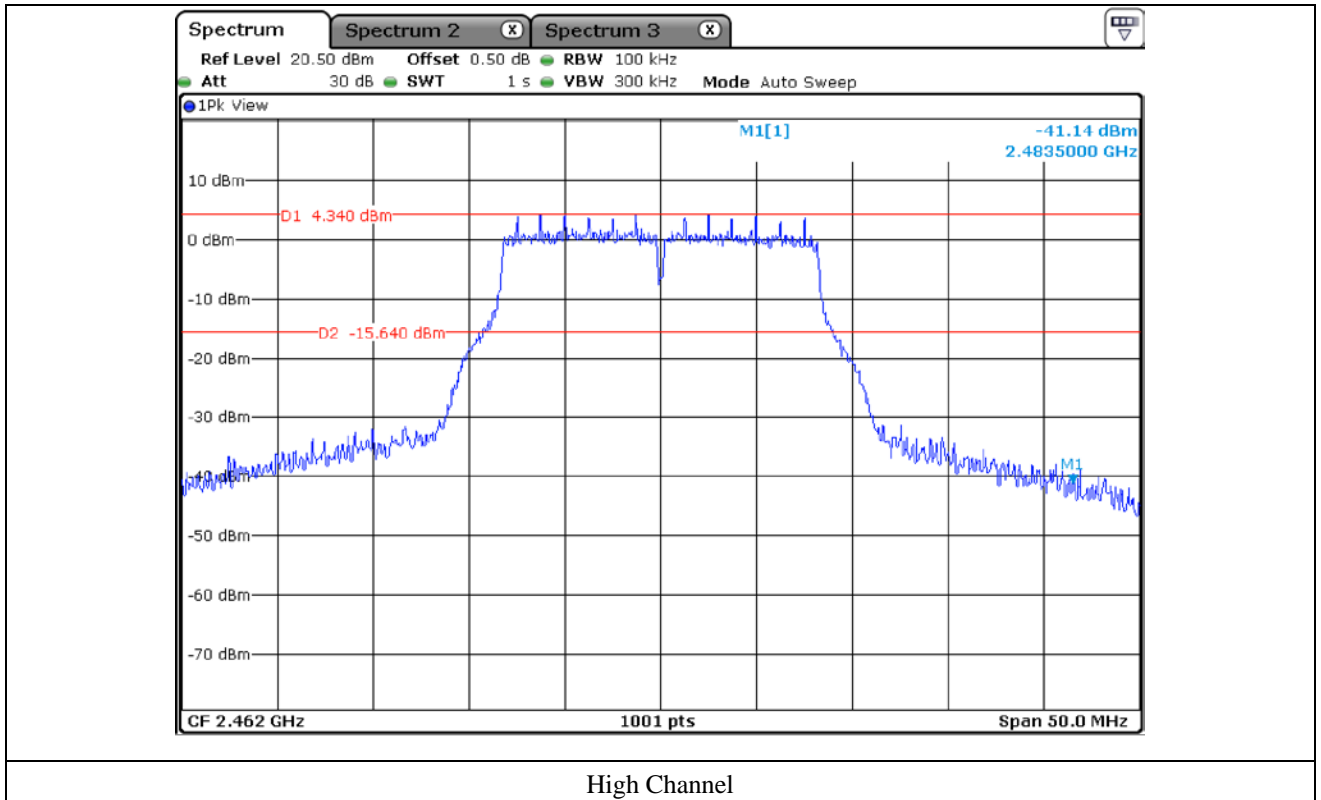


High Channel

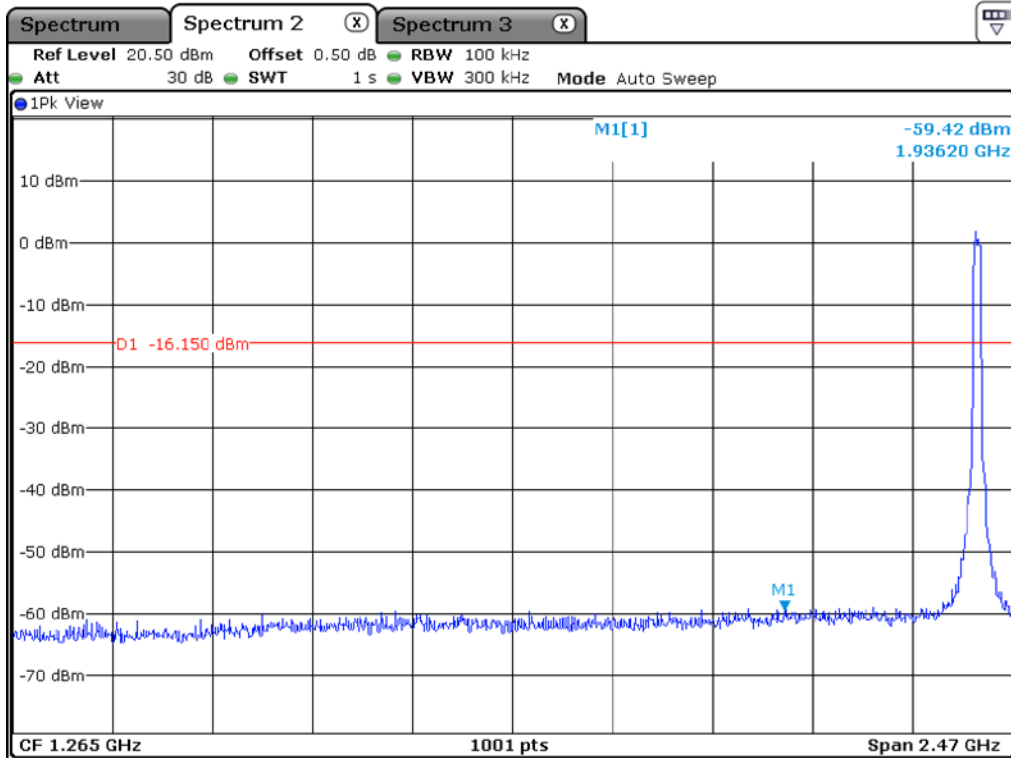


Low Channel

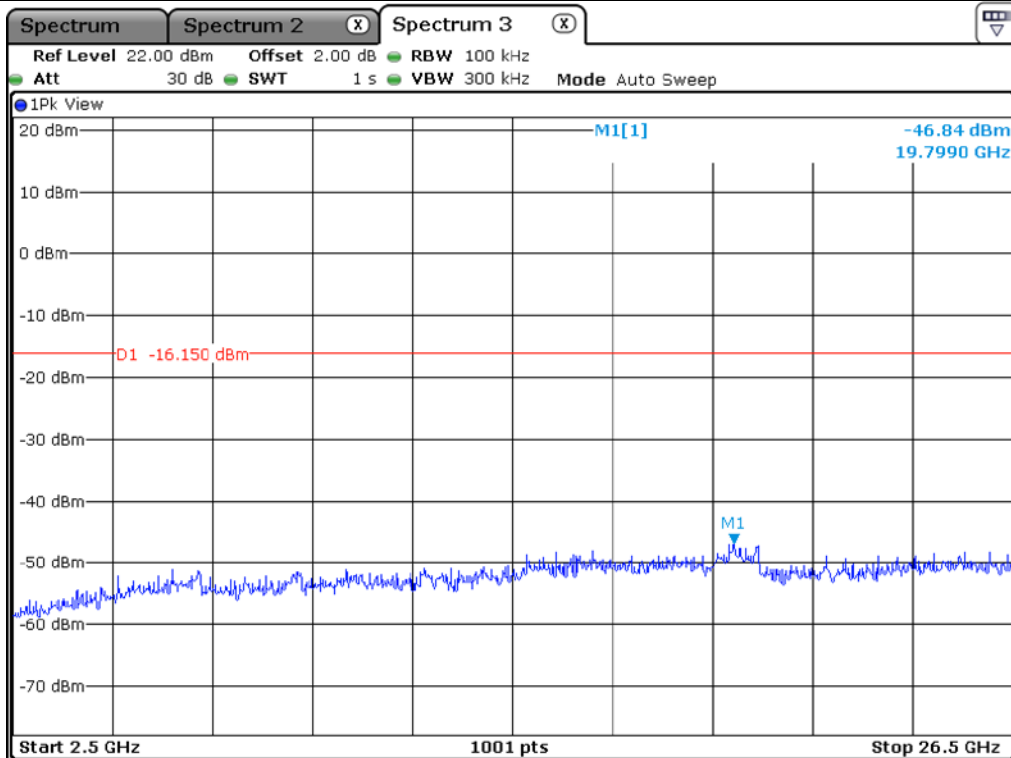


Low Channel

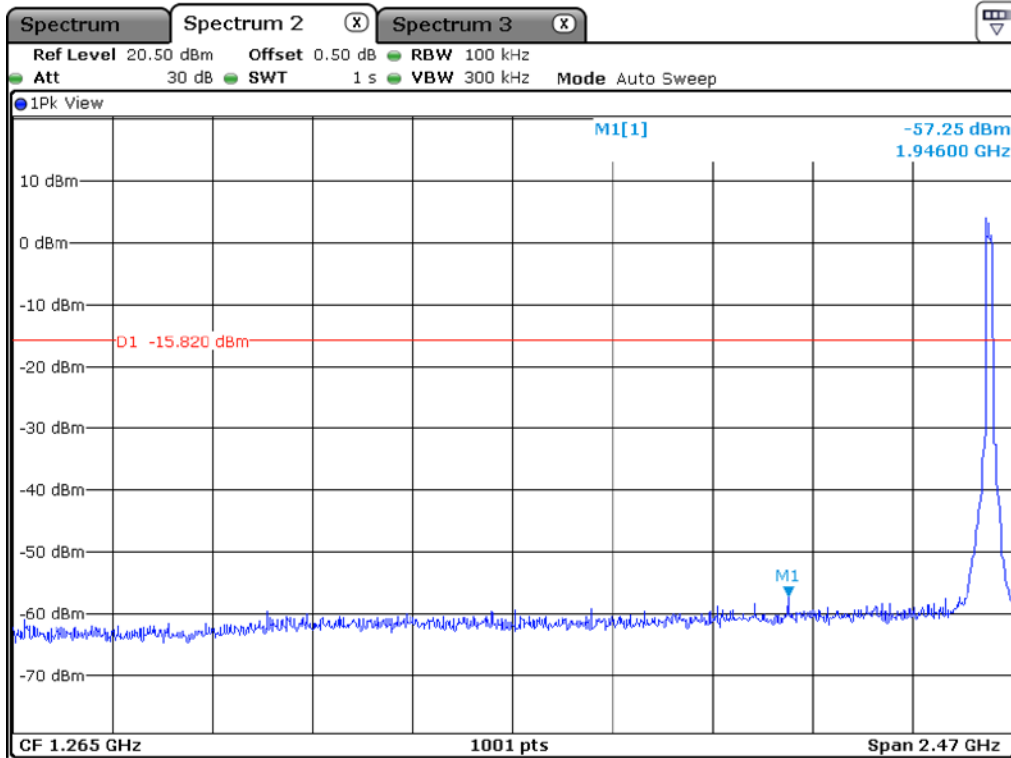


Middle Channel

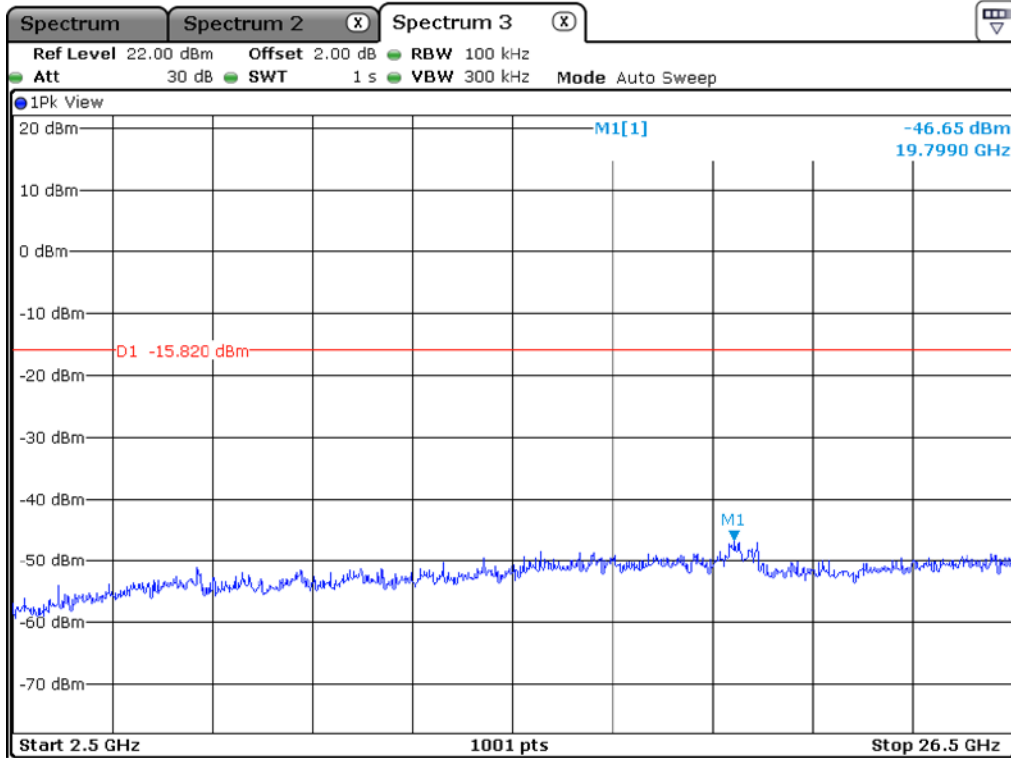

Middle Channel

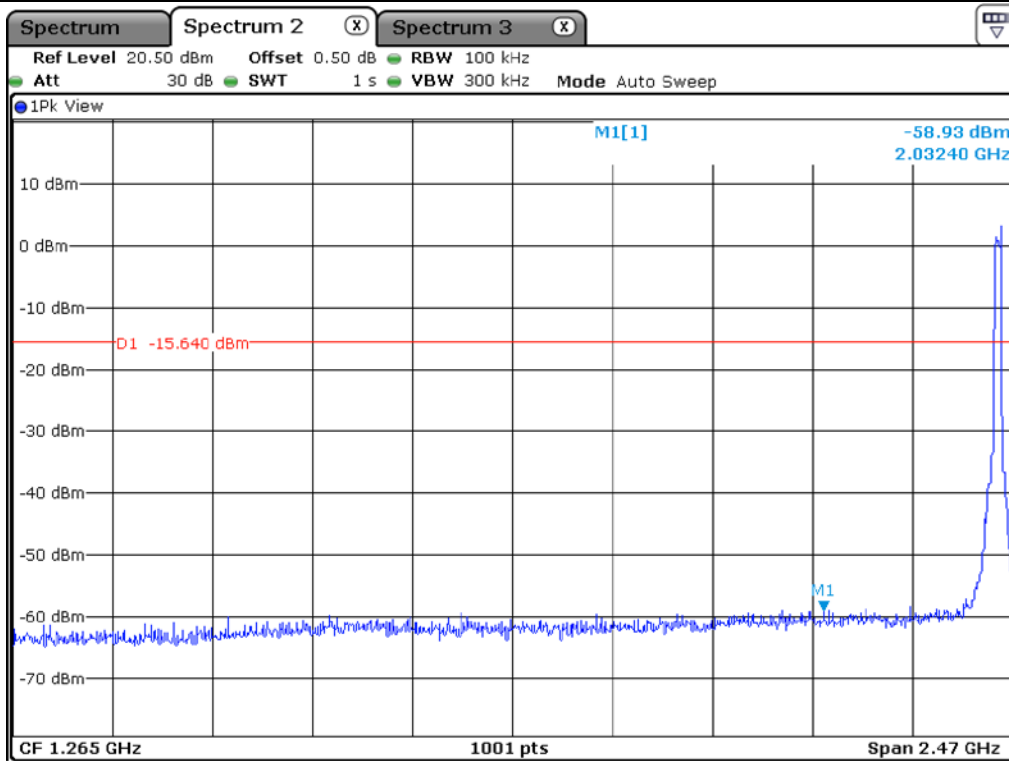


High Channel

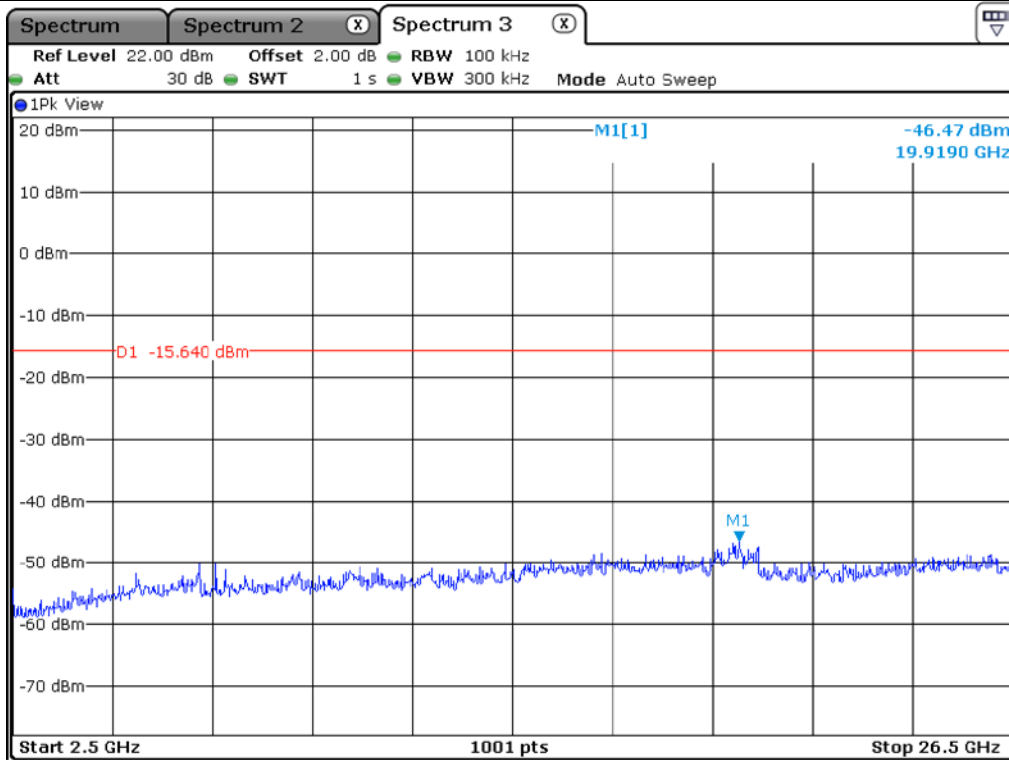


High Channel


9.5.3 Test data for 802.11n_HT20 WLAN Mode

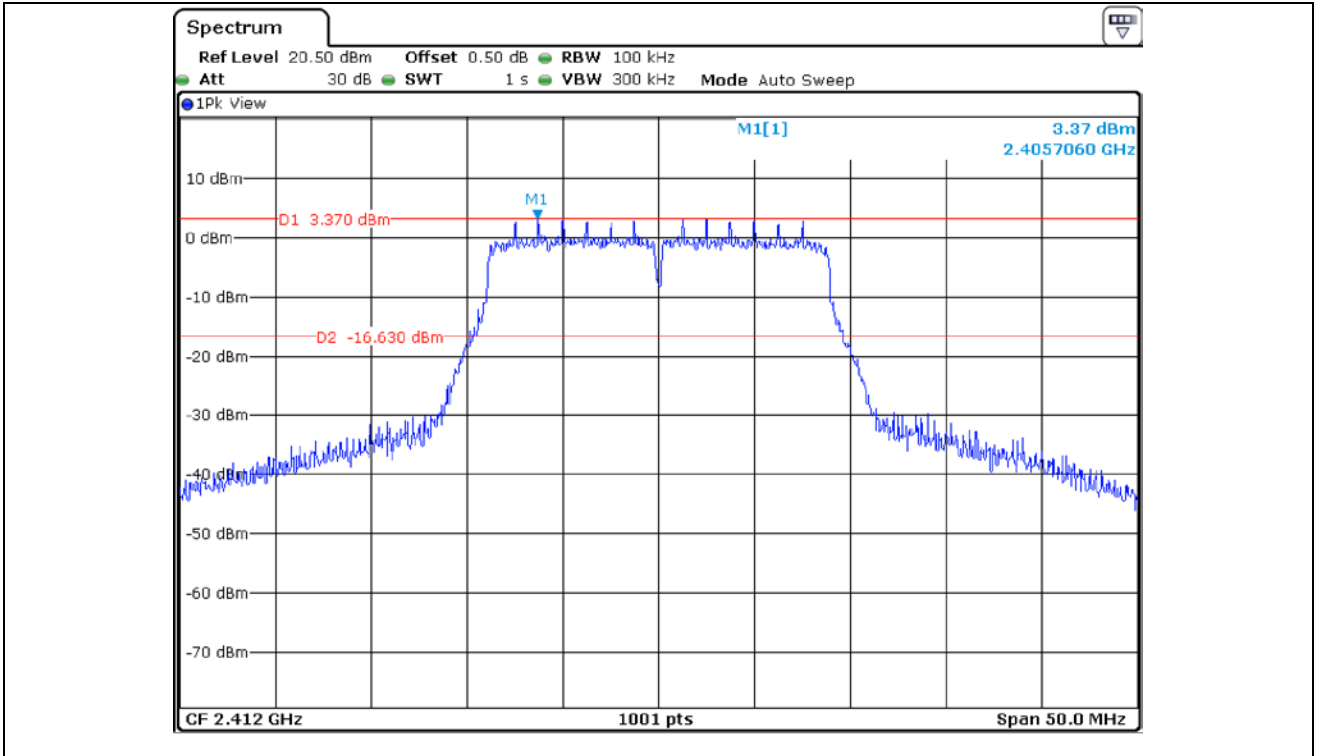


Low Channel

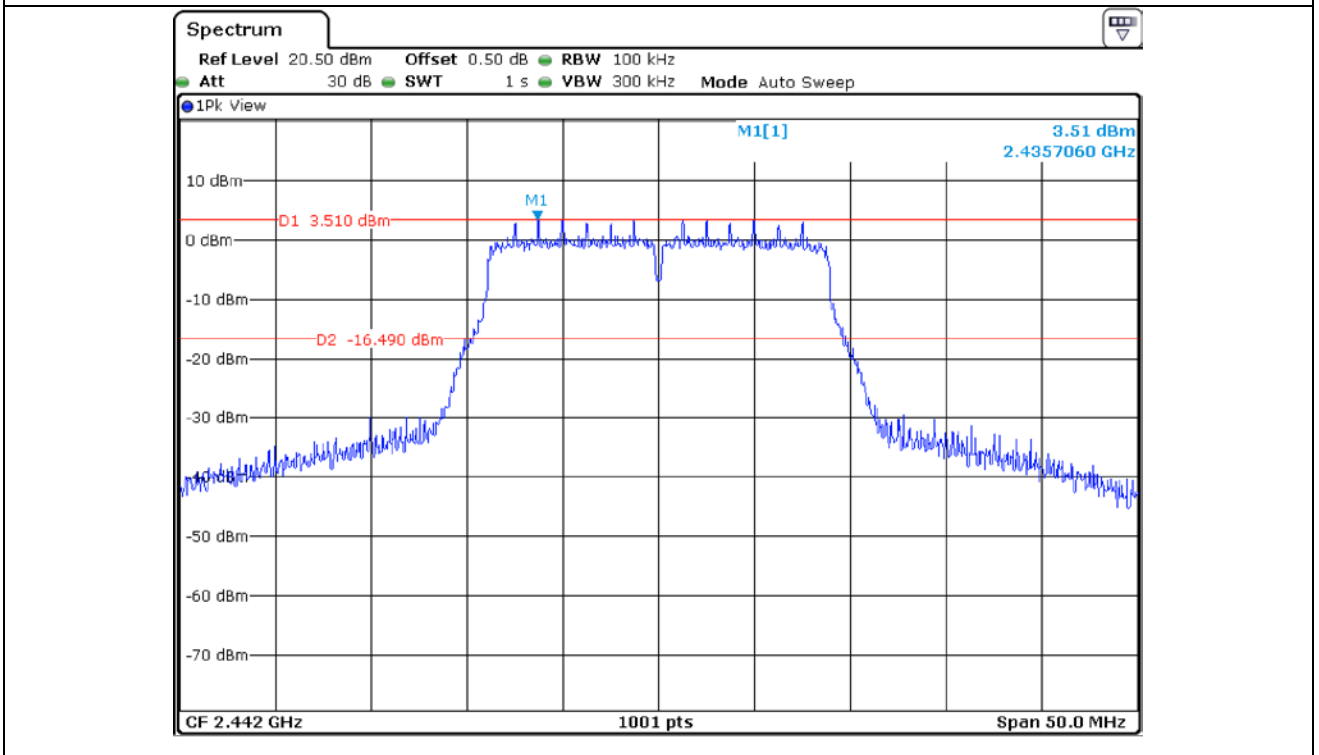


Middle Channel

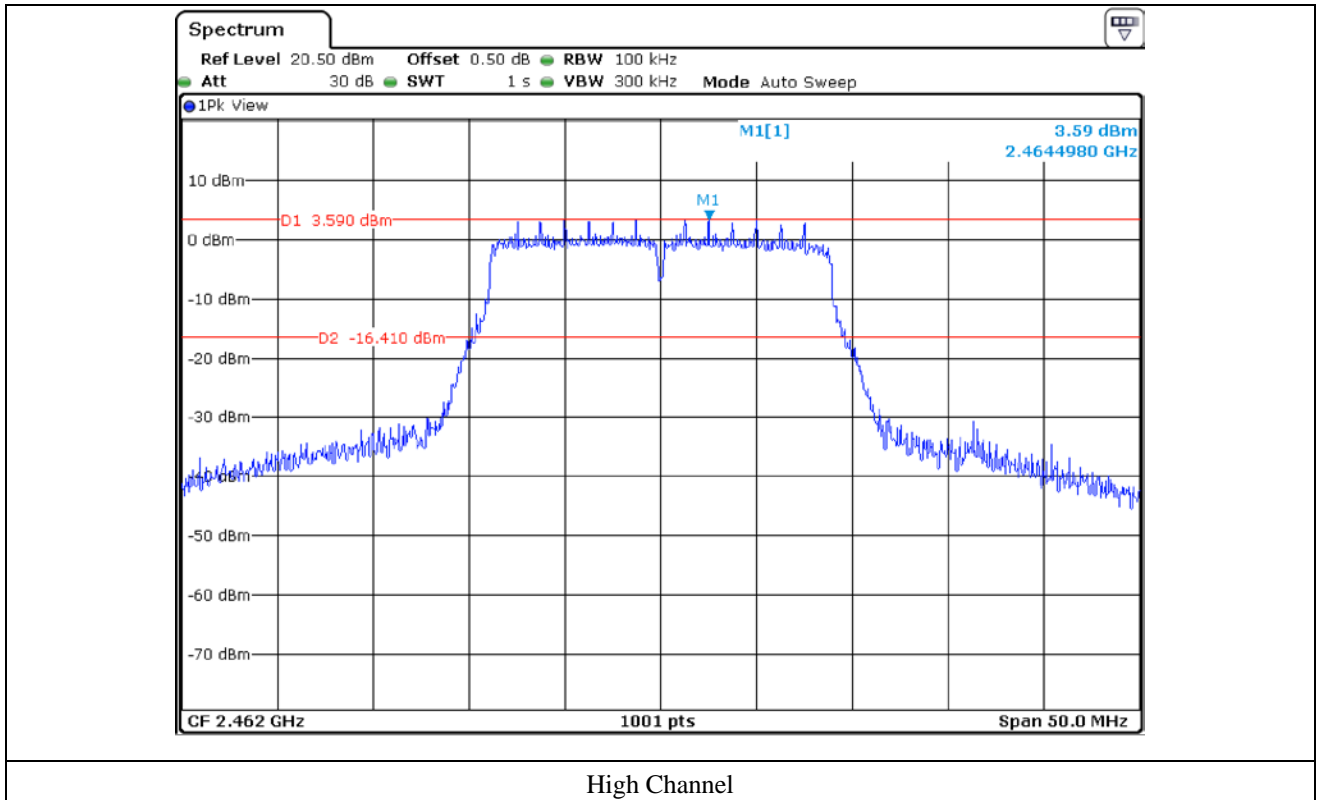


High Channel

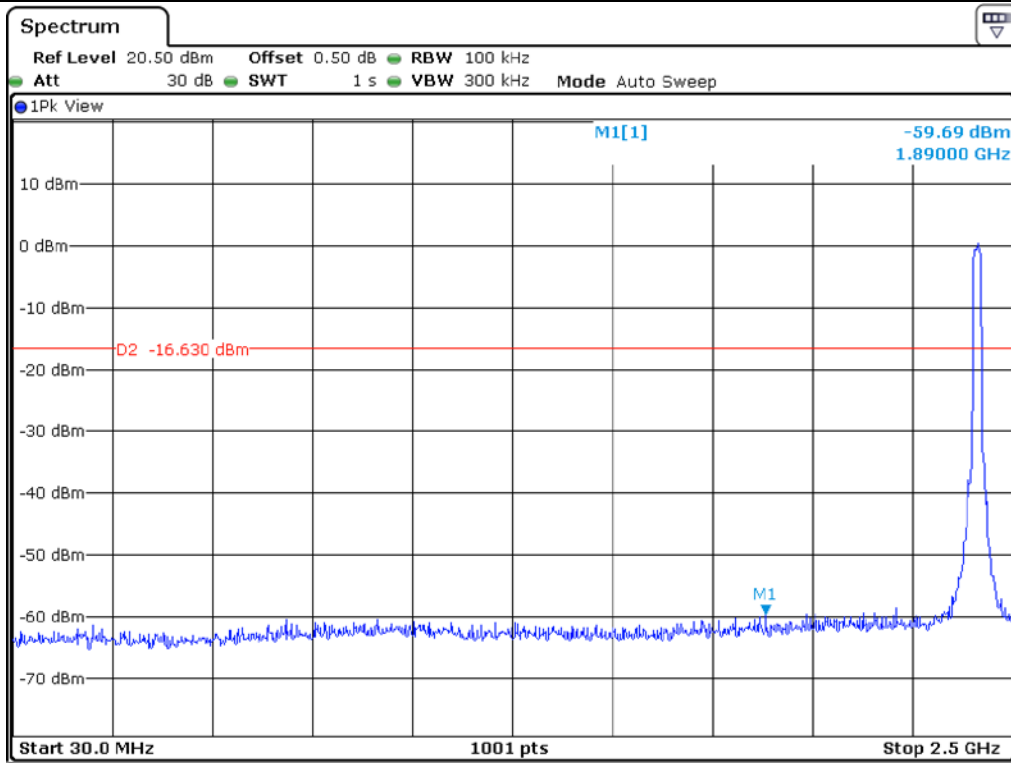


Low Channel

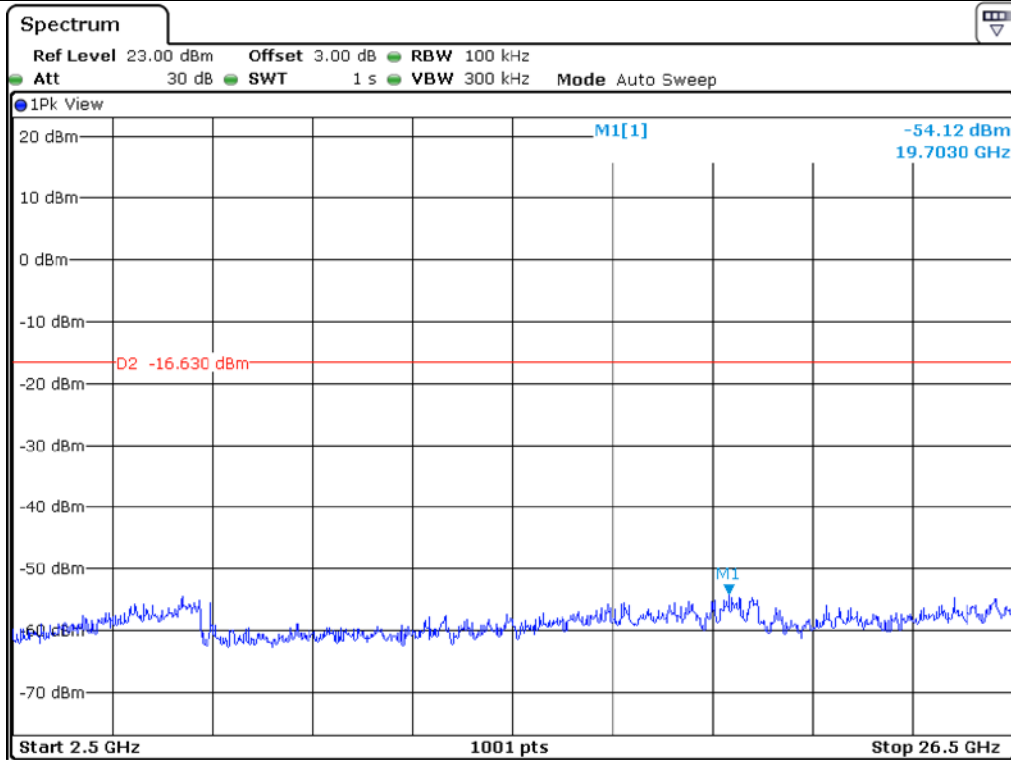


Low Channel

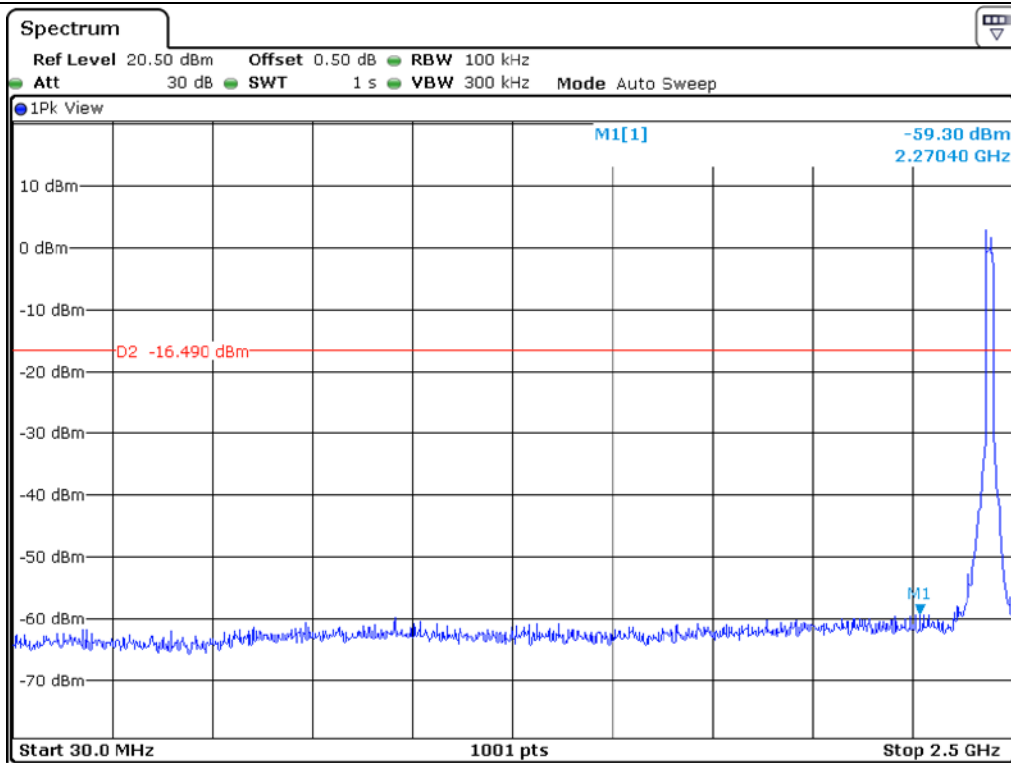


Middle Channel

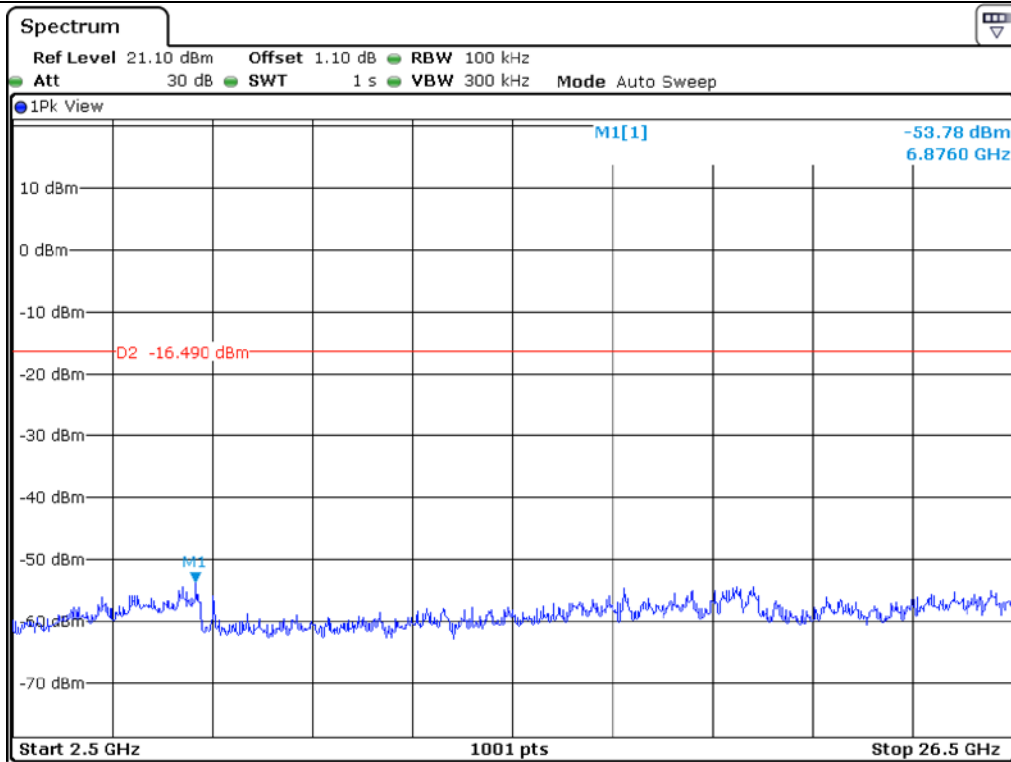

Middle Channel

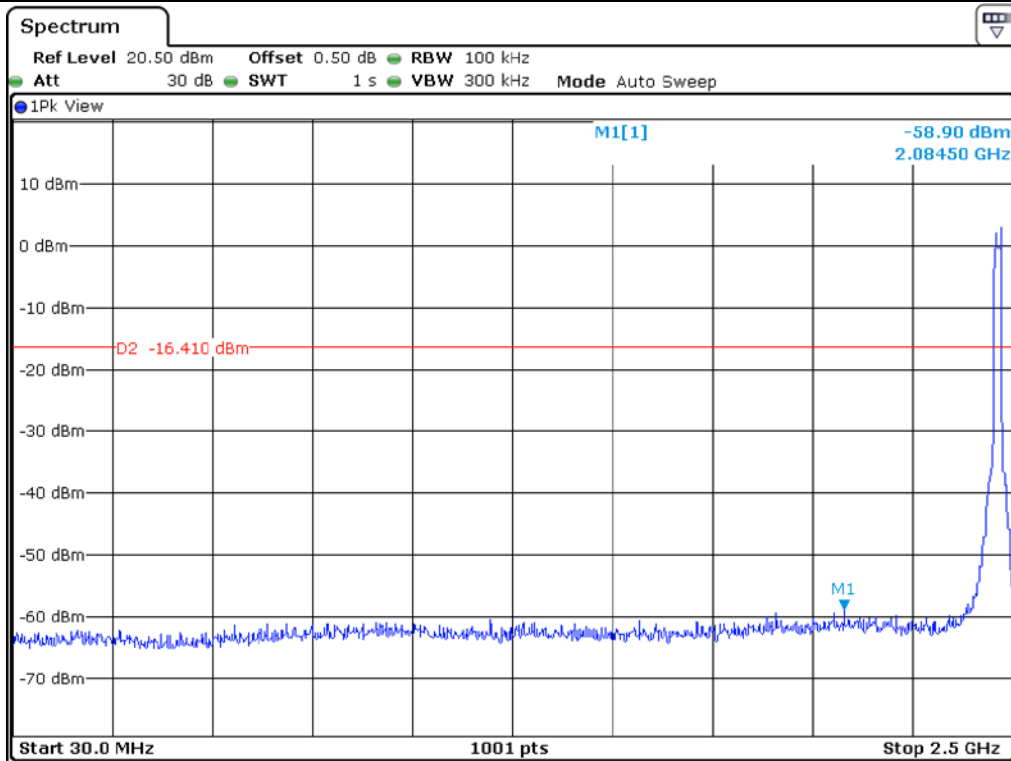

High Channel

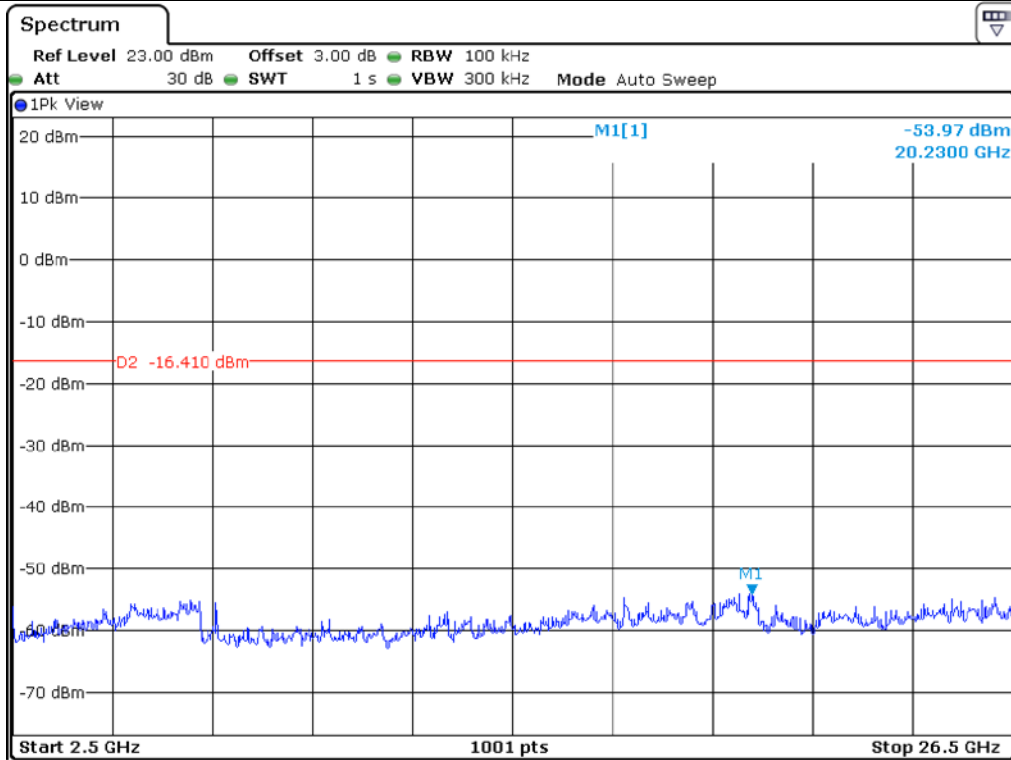

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

9.6.1.1 Test data for 802.11b WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 98 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	57.41	Peak	H	26.94	9.20	40.21	53.34	74.00	20.66
	51.71	Average	H				47.64	54.00	6.36
	49.72	Peak	V				45.65	74.00	28.35
	43.94	Average	V				39.87	54.00	14.13
Test Data for High Channel									
2 483.50	51.11	Peak	H	27.47	9.49	40.16	47.91	74.00	26.09
	47.14	Average	H				43.94	54.00	10.06
	43.53	Peak	V				40.33	74.00	33.67
	36.74	Average	V				33.54	54.00	20.46

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$

9.6.1.2 Test data for 802.11g WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 98 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	66.61	Peak	H	26.94	9.20	40.21	62.54	74.00	11.46
	52.16	Average	H				48.09	54.00	5.91
	60.11	Peak	V				56.04	74.00	17.96
	49.21	Average	V				45.14	54.00	8.86
Test Data for High Channel									
2 483.50	67.57	Peak	H	27.47	9.49	40.16	64.37	74.00	9.63
	53.36	Average	H				50.16	54.00	3.84
	61.20	Peak	V				58.00	74.00	16.00
	51.66	Average	V				48.46	54.00	5.54

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$

9.6.1.3 Test data for 802.11n_HT20 WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 98 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	70.54	Peak	H	26.94	9.20	40.21	66.47	74.00	7.53
	53.30	Average	H				49.23	54.00	4.77
	62.14	Peak	V				58.07	74.00	15.93
	50.30	Average	V				46.23	54.00	7.77
Test Data for High Channel									
2 483.50	67.35	Peak	H	27.47	9.49	40.16	64.15	74.00	9.85
	54.27	Average	H				51.07	54.00	2.93
	61.02	Peak	V				57.82	74.00	16.18
	52.15	Average	V				48.95	54.00	5.05

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$

9.6.2 Spurious & Harmonic Radiated Emission

9.6.2.1 Test data for 802.11b WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 98 %
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	50.10	Peak	H	30.84	12.31	40.69	52.56	74.00	21.44
	38.80	Average	H				41.26	54.00	12.74
	48.80	Peak	V				51.26	74.00	22.74
	40.90	Average	V				43.36	54.00	10.64
Test Data for Middle Channel									
4 884.00	48.60	Peak	H	30.01	12.43	40.65	50.39	74.00	23.61
	38.00	Average	H				39.79	54.00	14.21
	48.40	Peak	V				50.19	74.00	23.81
	40.20	Average	V				41.99	54.00	12.01
Test Data for High Channel									
4 924.00	51.00	Peak	H	31.15	12.81	40.61	54.35	74.00	19.65
	38.00	Average	H				41.35	54.00	12.65
	49.30	Peak	V				52.65	74.00	21.35
	40.40	Average	V				43.75	54.00	10.25

Test Data

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$

9.6.2.2 Test data for 802.11g WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 98 %
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	47.70	Peak	H	30.84	12.31	40.69	50.16	74.00	23.84
	40.20	Average	H				42.66	54.00	11.34
	48.10	Peak	V				50.56	74.00	23.44
	39.60	Average	V				42.06	54.00	11.94
Test Data for Middle Channel									
4 884.00	47.80	Peak	H	30.01	12.43	40.65	49.59	74.00	24.41
	38.10	Average	H				39.89	54.00	14.11
	48.30	Peak	V				50.09	74.00	23.91
	39.90	Average	V				41.69	54.00	12.31
Test Data for High Channel									
4 924.00	50.90	Peak	H	31.15	12.81	40.61	54.25	74.00	19.75
	38.80	Average	H				42.15	54.00	11.85
	48.10	Peak	V				51.45	74.00	22.55
	39.30	Average	V				42.65	54.00	11.35

Test Data

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$

9.6.2.3 Test data for 802.11n_HT20 WLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 98 %
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	48.40	Peak	H	30.84	12.31	40.69	50.86	74.00	23.14
	39.50	Average	H				41.96	54.00	12.04
	47.60	Peak	V				50.06	74.00	23.94
	40.10	Average	V				42.56	54.00	11.44
Test Data for Middle Channel									
4 884.00	48.00	Peak	H	30.01	12.43	40.65	49.79	74.00	24.21
	38.90	Average	H				40.69	54.00	13.31
	50.20	Peak	V				51.99	74.00	22.01
	39.70	Average	V				41.49	54.00	12.51
Test Data for High Channel									
4 924.00	49.80	Peak	H	31.15	12.81	40.61	53.15	74.00	20.85
	40.60	Average	H				43.95	54.00	10.05
	48.80	Peak	V				52.15	74.00	21.85
	38.80	Average	V				42.15	54.00	11.85

Test Data

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$

10. PEAK POWER SPECTRUL DENSITY

10.1 Operating environment


Temperature : 23 °C

Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

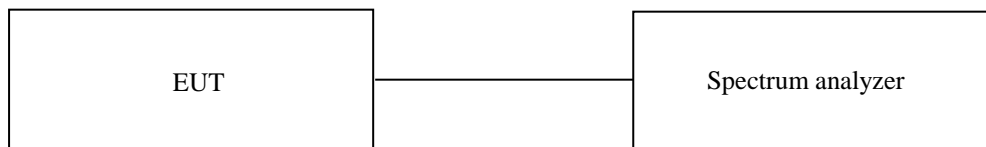

10.3 Test Date

December 03, 2020 ~ December 09, 2020


10.4 Test data for 802.11b WLAN Mode

- Test Result : Pass


- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412	-5.75	8.00	13.75
Middle	2 442	-5.01	8.00	13.01
High	2 462	-4.45	8.00	12.45


Remark. Margin = Limit – Measured value

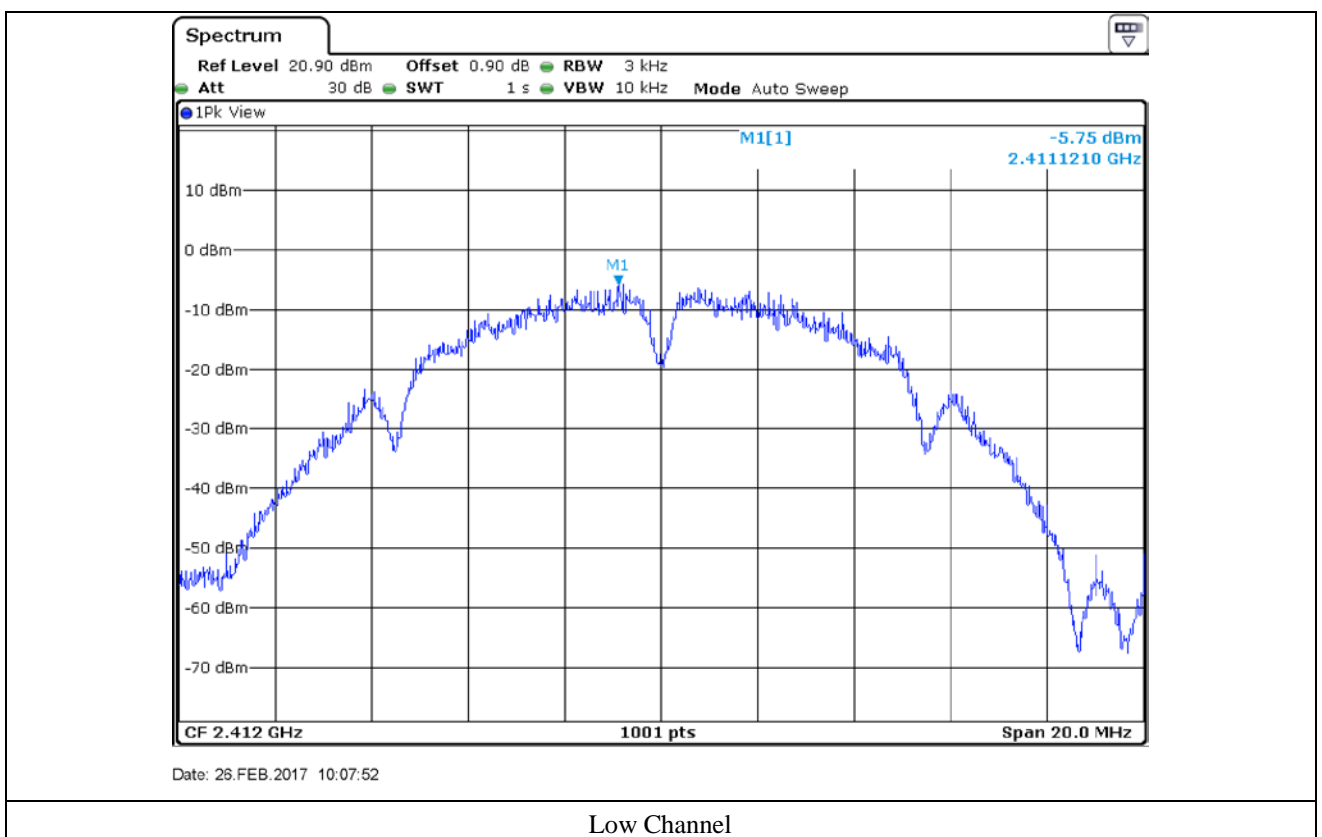

Low Channel

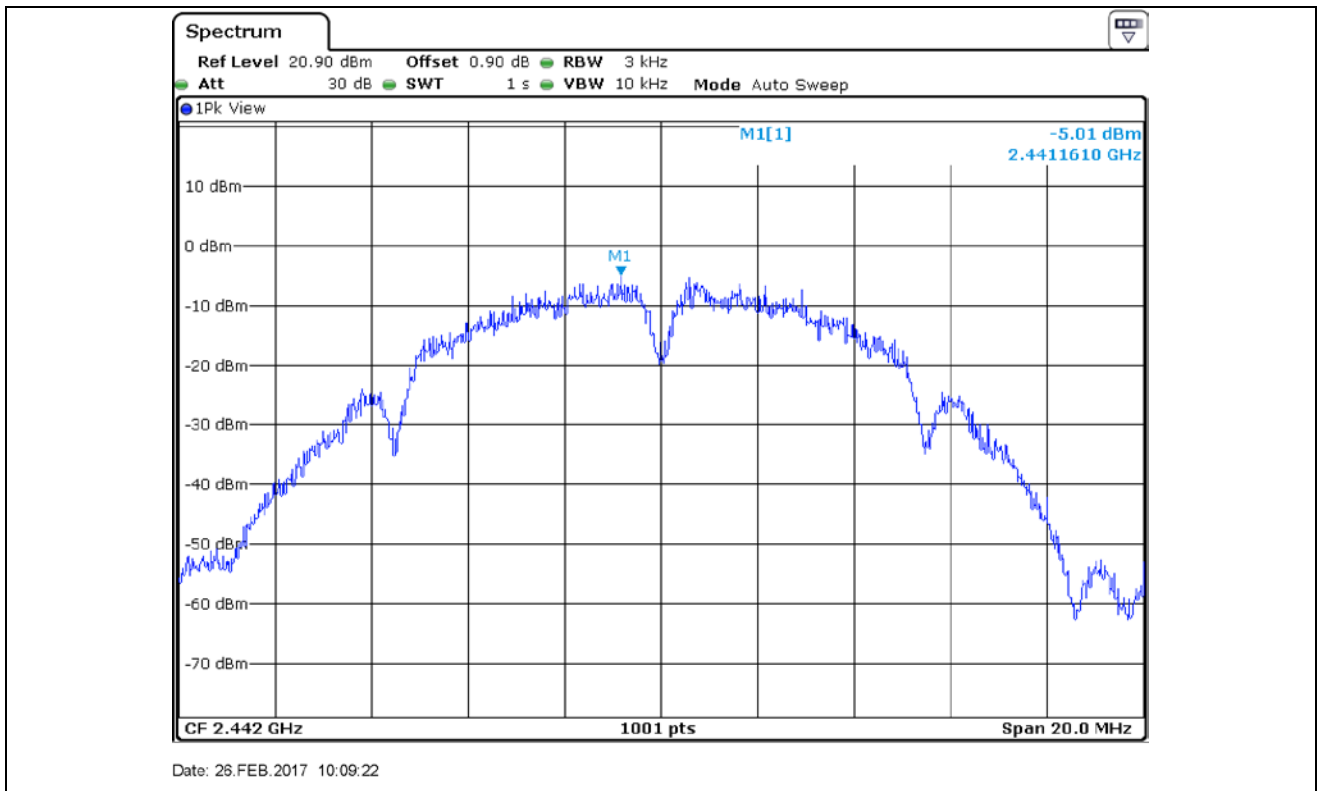

Middle Channel

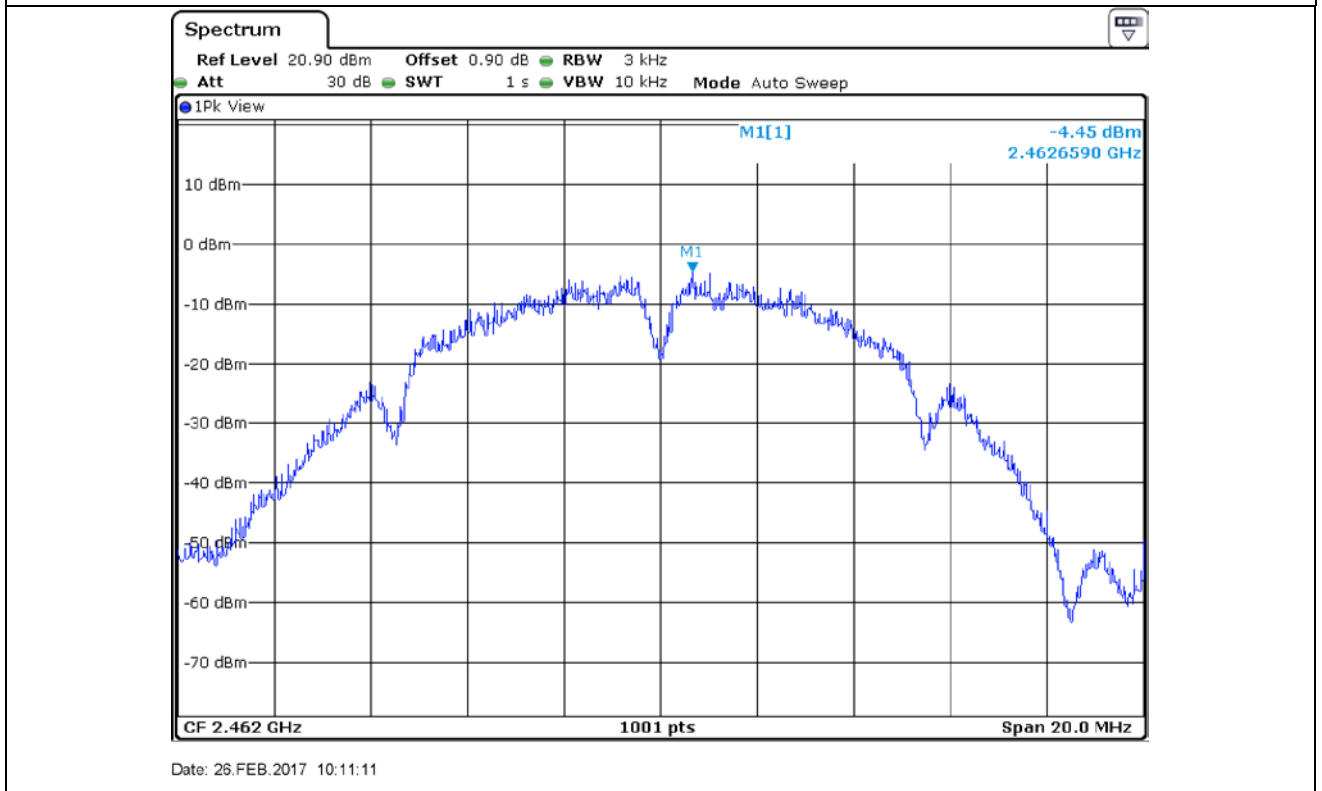

High Channel


10.5 Test data for 802.11g WLAN Mode

- Test Result : Pass


- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412	-9.25	8.00	17.25
Middle	2 442	-9.19	8.00	17.19
High	2 462	-8.62	8.00	16.62


Remark. Margin = Limit – Measured value

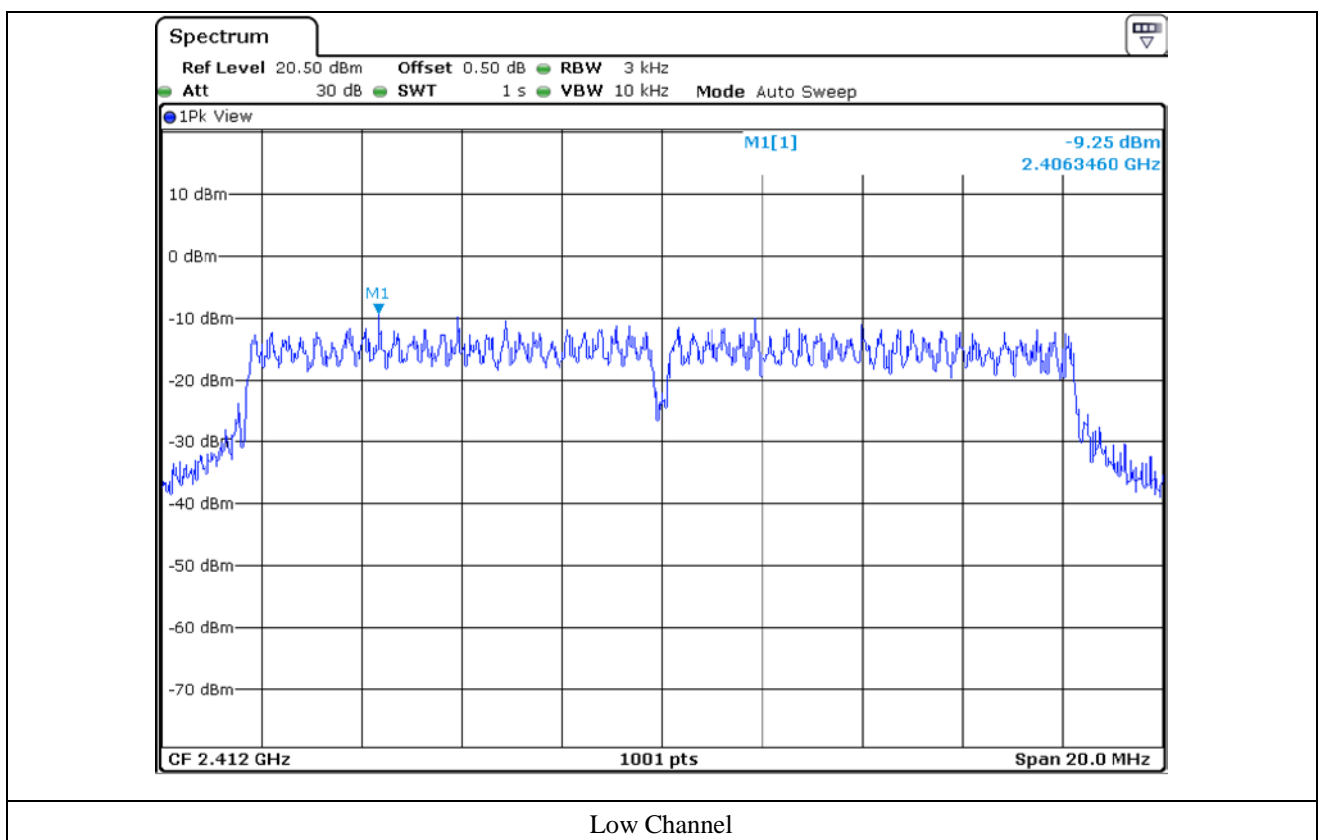

Low Channel

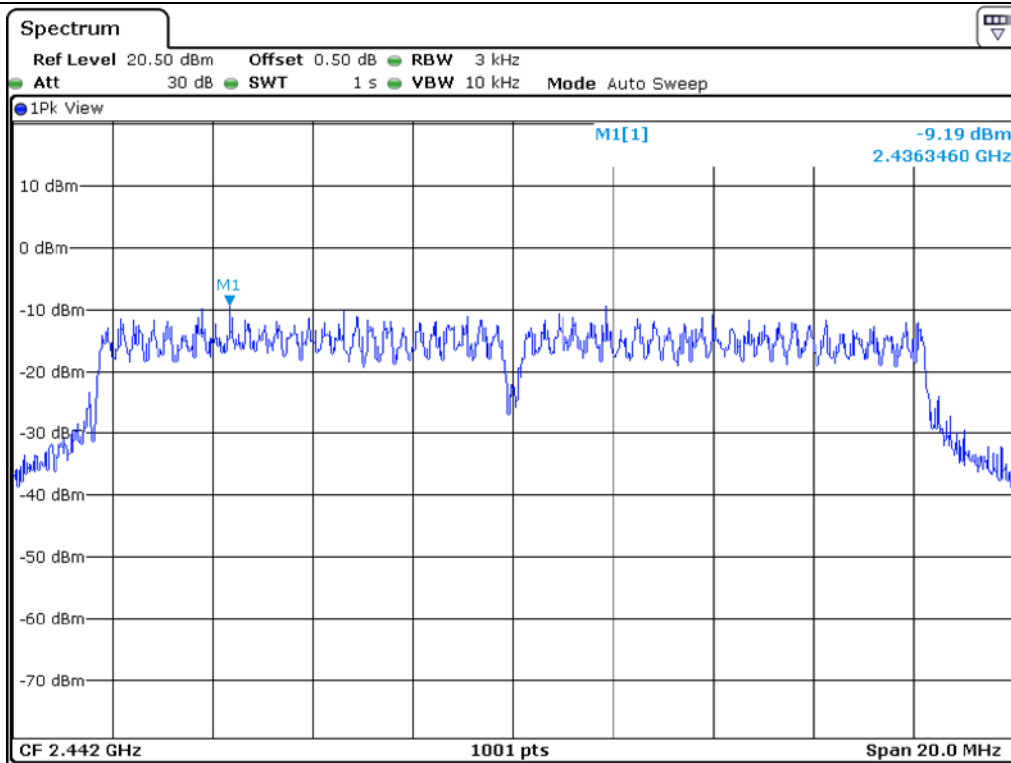

Middle Channel

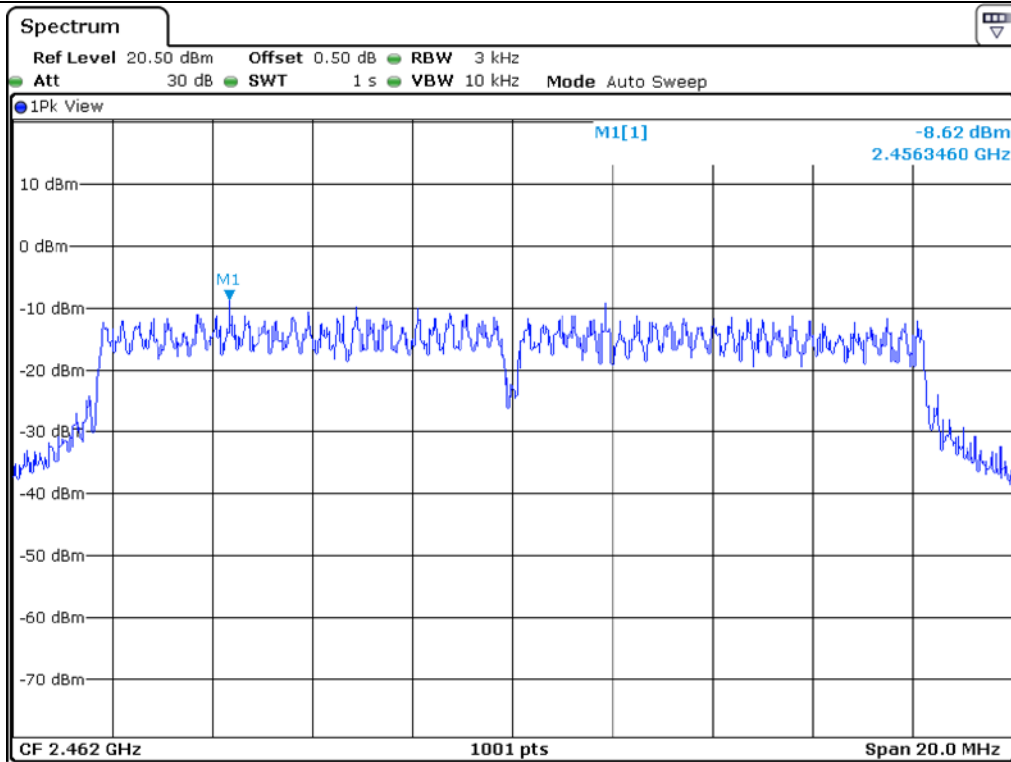

High Channel


10.6 Test data for 802.11n_HT20 WLAN Mode


- Test Result : Pass

- Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412	-11.38	8.00	19.38
Middle	2 442	-10.97	8.00	18.97
High	2 462	-10.96	8.00	18.96

Remark. Margin = Limit – Measured value

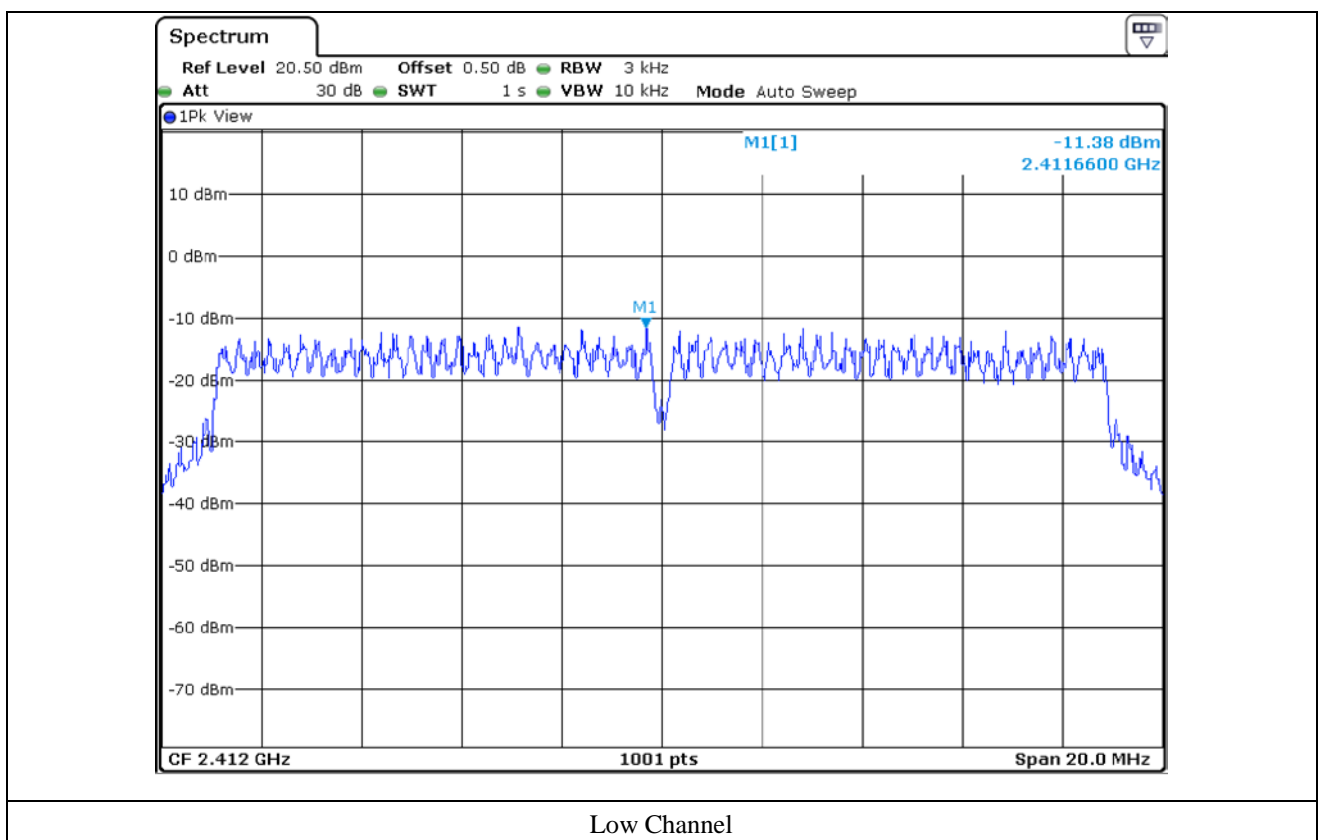

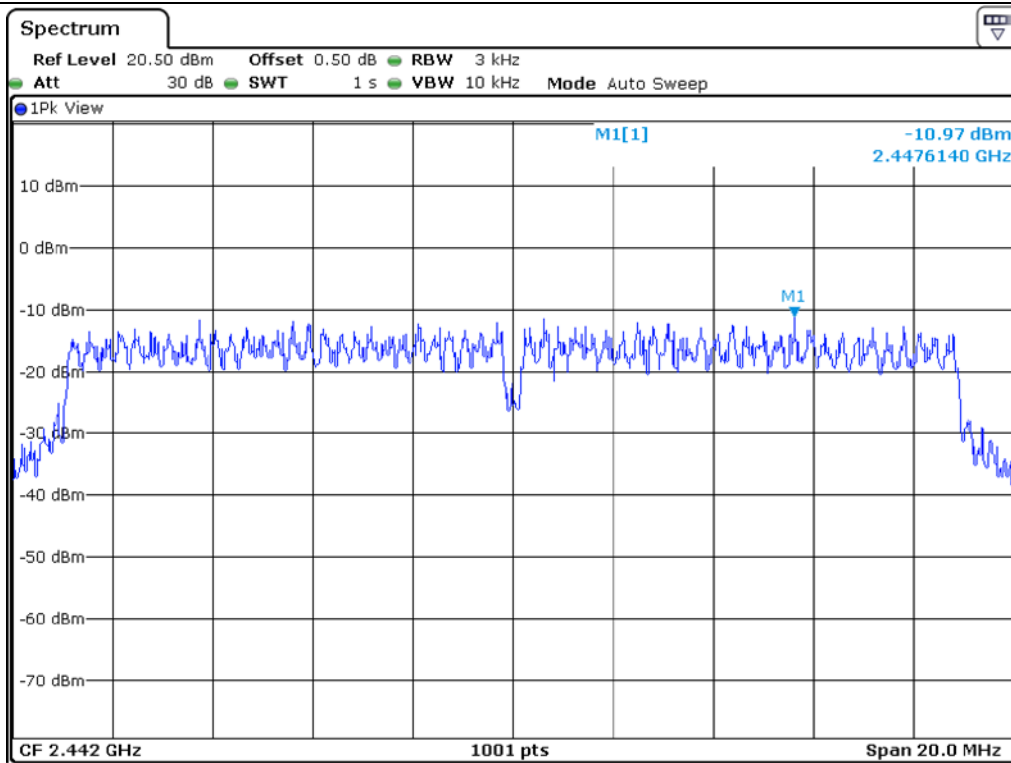

Middle Channel

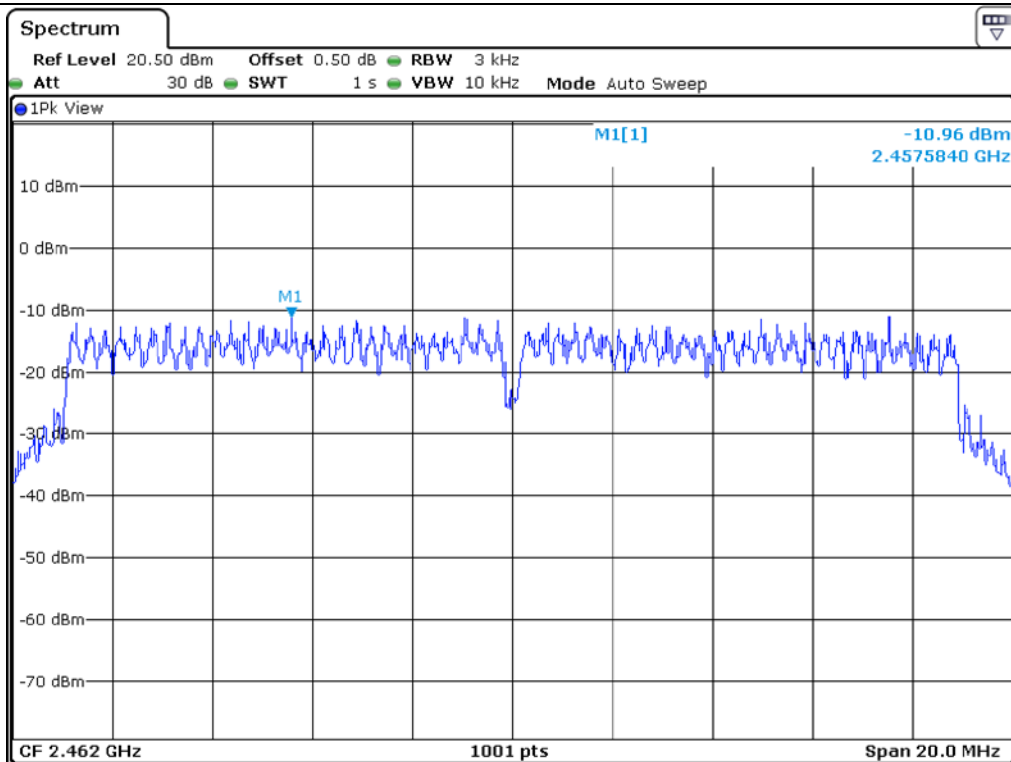

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23 °C

Relative humidity : 45 % R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Test Date

December 03, 2020 ~ December 09, 2020


11.4 Test data for 30 MHz ~ 1 000 MHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : BT(V4.2) + WLAN(802.11a/b/g/n/ac) 2x2 MIMO Module

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

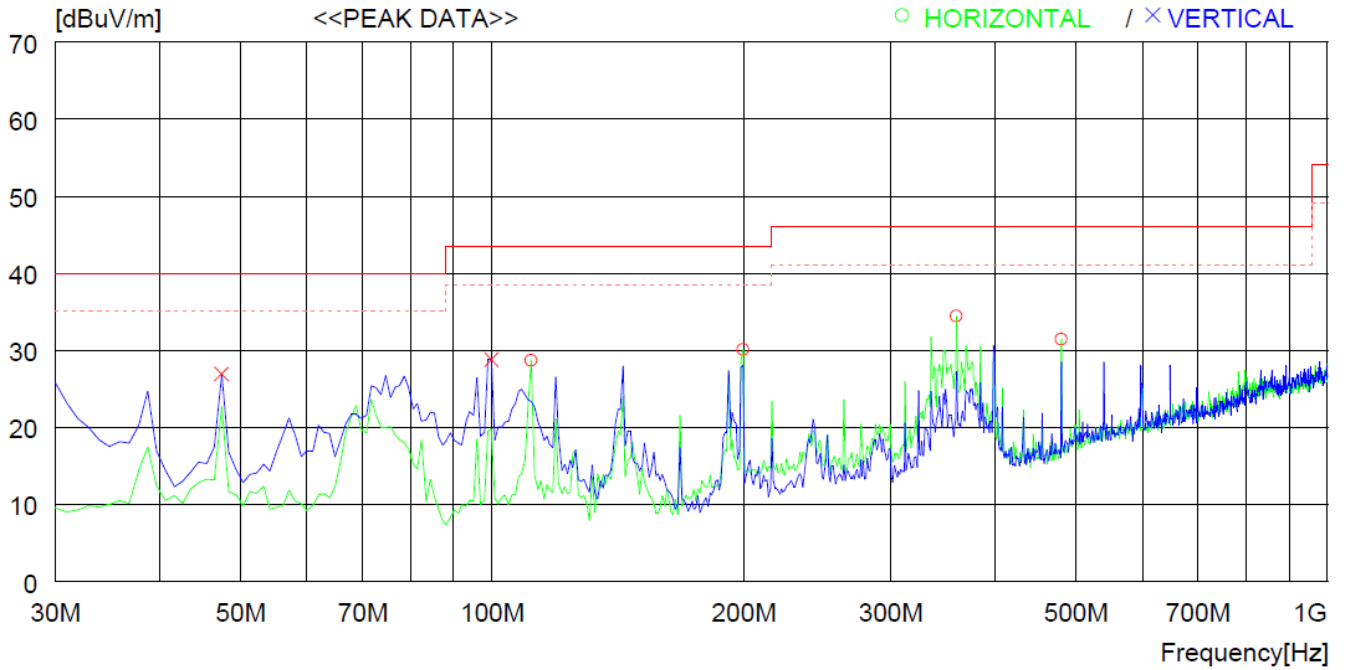

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	111.480	47.5	11.3	2.9	33.1	28.6	43.5	14.9	100	0
2	199.750	48.7	10.7	3.7	33.0	30.1	43.5	13.4	100	0
3	359.800	47.4	15.0	5.1	33.1	34.4	46.0	11.6	100	0
4	480.081	42.1	16.6	5.9	33.2	31.4	46.0	14.6	100	198
----- Vertical -----										
5	47.460	43.6	14.3	2.0	33.0	26.9	40.0	13.1	100	276
6	99.840	46.8	12.4	2.7	33.1	28.8	43.5	14.7	100	276

11.5 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									

11.6 Test data for above 1 GHz

- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									

12. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	102177	Apr. 20, 2020 (1Y)
FSW43	Rohde & Schwarz	Signal Analyzer	104544	Jul. 15, 2020 (1Y)
ESW	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 27, 2020 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2020 (1Y)
PAM-118A	Com-Power	Pre-Amplifier	18040081	Oct. 12, 2020 (1Y)
PAM-840A	Com-Power	Pre-Amplifier	461339	Oct. 16, 2020 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
NRP-Z81	Rohde & Schwarz	Wide band Sensor	101975	Feb. 19, 2020 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020 (2Y)
HLP-2008	TDK	Hybrid Antenna	131316	Feb. 27, 2020 (2Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2020 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020(1Y)