

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W159R-D021
AGR No. : A158A-147
Applicant : LG Innotek Co., Ltd.
Address : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731, Korea
Manufacturer : SUZHOU NIHONE Electronics Technology Co., LTD.
Address : No.185 XiaoXiang Road Suzhou High tech Zone
Type of Equipment : Electric Shelf Label
FCC ID. : YZP-REBETZ29A
Model Name : REBE-TZ29A
Serial number : N/A
Total page of Report : 32 pages (including this page)
Date of Incoming : August 31, 2015
Date of issue : September 14, 2015

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by: 

 Ki-Hong, Nam / Asst, Chief Engineer
 ONETECH Corp.

Approved by: 

 Sung-Ik, Han/ Managing Director
 ONETECH Corp.

CONTENTS**PAGE**

| | |
|--------------------------------------------------------------------------------|-----------|
| 1. VERIFICATION OF COMPLIANCE | 5 |
| 2. TEST SUMMARY..... | 6 |
| 2.1 TEST ITEMS AND RESULTS | 6 |
| 2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS..... | 6 |
| 2.3 RELATED SUBMITTAL(S) / GRANT(S) | 6 |
| 2.4 PURPOSE OF THE TEST | 6 |
| 2.5 TEST METHODOLOGY..... | 6 |
| 2.6 TEST FACILITY..... | 6 |
| 3. GENERAL INFORMATION..... | 7 |
| 3.1 PRODUCT DESCRIPTION..... | 7 |
| 3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT..... | 7 |
| 4. EUT MODIFICATIONS..... | 7 |
| 5. SYSTEM TEST CONFIGURATION | 8 |
| 5.1 JUSTIFICATION..... | 8 |
| 5.2 PERIPHERAL EQUIPMENT | 8 |
| 5.3 MODE OF OPERATION DURING THE TEST | 8 |
| 5.4 CONFIGURATION OF TEST SYSTEM..... | 9 |
| 5.5 ANTENNA REQUIREMENT | 9 |
| 6. PRELIMINARY TEST | 10 |
| 6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS..... | 10 |
| 6.2 GENERAL RADIATED EMISSIONS TESTS | 10 |
| 7. MIMIMUM 6 DB BANDWIDTH | 11 |
| 7.1 OPERATING ENVIRONMENT | 11 |
| 7.2 TEST SET-UP | 11 |
| 7.3 TEST EQUIPMENT USED..... | 11 |
| 7.4 TEST DATA..... | 12 |
| 8. MAXIMUM PEAK OUTPUT POWER..... | 14 |
| 8.1 OPERATING ENVIRONMENT | 14 |
| 8.2 TEST SET-UP | 14 |
| 8.3 TEST EQUIPMENT USED..... | 14 |
| 8.4 TEST DATA..... | 15 |

| | |
|-----------------------------------------------------------------------|-----------|
| 9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND..... | 17 |
| 9.1 OPERATING ENVIRONMENT | 17 |
| 9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT | 17 |
| 9.3 TEST SET-UP FOR RADIATED MEASUREMENT..... | 17 |
| 9.4 TEST EQUIPMENT USED..... | 17 |
| 9.5 TEST DATA FOR CONDUCTED EMISSION | 18 |
| <i>9.6 Test data for radiated emission</i> | <i>23</i> |
| <i>9.6.1 Radiated Emission which fall in the Restricted Band.....</i> | <i>23</i> |
| <i>9.6.2 Spurious & Harmonic Radiated Emission.....</i> | <i>24</i> |
| 10. PEAK POWER SPECTRAL DENSITY | 25 |
| 10.1 OPERATING ENVIRONMENT | 25 |
| 10.2 TEST SET-UP | 25 |
| 10.3 TEST EQUIPMENT USED..... | 25 |
| 10.4 TEST DATA..... | 26 |
| 11. RADIATED EMISSION TEST | 28 |
| 11.1 OPERATING ENVIRONMENT | 28 |
| 11.2 TEST SET-UP | 28 |
| 11.3 TEST EQUIPMENT USED..... | 28 |
| 11.4 TEST DATA..... | 29 |
| <i>11.4.1 Test data for Below 30 MHz.....</i> | <i>32</i> |
| <i>11.4.2 Test data for above 1 GHz</i> | <i>32</i> |

Revision History

| Issued Report No. | Issued Date | Revisions | Effect Section |
|-------------------|--------------------|---------------|----------------|
| W159R-D021 | September 14, 2015 | Initial Issue | All |
| | | | |
| | | | |

1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.
 Address : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731, Korea
 Contact Person : Jeong, Inchang / Director
 Telephone No. : +86-62-950-0332
 FCC ID : YZP-REBETZ29A
 Model Name : REBE-TZ29A
 Serial Number : N/A
 Date : September 14, 2015

| | |
|------------------------------------------------------|--------------------------------------|
| EQUIPMENT CLASS | DTS – DIGITAL TRNSMISSION SYSTEM |
| E.U.T. DESCRIPTION | Electric Shelf Label |
| THIS REPORT CONCERNS | Original Grant |
| MEASUREMENT PROCEDURES | ANSI C63.10: 2013 |
| TYPE OF EQUIPMENT TESTED | Pre-Production |
| KIND OF EQUIPMENT AUTHORIZATION REQUESTED | Certification |
| EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S) | FCC PART 15 SUBPART C Section 15.247 |
| Modifications on the Equipment to Achieve Compliance | None |
| Final Test was Conducted On | 3 m, Semi Anechoic Chamber |

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

| SECTION | TEST ITEMS | RESULTS |
|----------------|-----------------------------------------------------|------------------------|
| 15.247 (a) (2) | Minimum 6 dB Bandwidth | Met the Limit / PASS |
| 15.247 (b) (3) | Maximum Peak Conducted Output Power | Met the Limit / PASS |
| 15.247 (d) | 100 kHz Bandwidth Outside the Frequency Band | Met the Limit / PASS |
| 15.247 (d) | Radiated Emission which fall in the Restricted Band | Met the Limit / PASS |
| 15.247 (e) | Peak Power Spectral Density | Met the Limit / PASS |
| 15.209 | Radiated Emission Limits | Met the Limit / PASS |
| 15.207 | Conducted Limits | N/A (See Note) |
| 15.203 | Antenna Requirement | Met requirement / PASS |

Note: This test is not performed because the EUT is operated by DC battery.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 301-14, Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862 Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-666/ T-1842 IC (Industry Canada) – Registration No. Site# 3736-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation No. 85

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Innotek Co., Ltd., Model REBE-TZ29A (referred to as the EUT in this report) is a Electric Shelf Label. The product specification described herein was obtained from product data sheet or user’s manual.

| | |
|-------------------------------------------------------|-------------------------------------------------|
| Device Type | Electric Shelf Label |
| Temperature Range | 0 °C ~ +40 °C |
| Operating Frequency | 2 405 MHz ~ 2 480 MHz |
| RF Output Power | -0.02 dBm |
| Number of Channel | 16 Channel |
| Modulation Type | O-QPSK |
| Antenna Type | PCB Pattern Antenna |
| USED RF CHIP | Marker: TEXAS INSTRUMENTS Model Name: CC2530 |
| Antenna Gain | -1.35 dBi |
| List of each Osc. or crystal Freq.(Freq. >= 1 MHz) | 32 MHz |
| RATED SUPPLY VOLTAGE | 1.5 V Alkaline Battery(AAAA) * 2 |

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

| DEVICE TYPE | MANUFACTURER | MODEL/PART NUMBER | FCC ID |
|-------------|---------------------------------------------------|-------------------|--------|
| Main Board | SUZHOU NIHONE Electronics Technology Co., LTD. | ESL Tag 2.9” | N/A |
| DISPLAY | wuxi vision peak technology | EPD-M055 | N/A |

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested: None

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 405 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB pattern antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

| Operation Mode | The Worse operating condition (Please check one only) |
|-----------------------------------------------------------------------------------------------|-------------------------------------------------------|
| It is not need to test this requirement, because the power of the EUT is supplied by battery. | |

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

| Operation Mode | The Worse operating condition (Please check one only) |
|----------------|-------------------------------------------------------|
| TX mode | X |


7. MIMIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 50.3 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

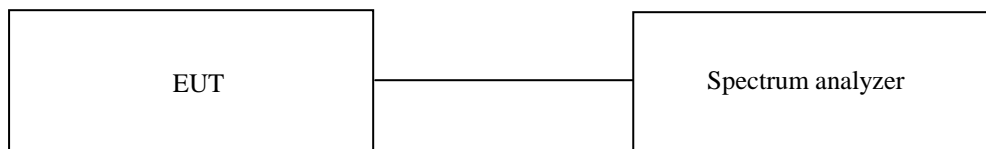

7.3 Test equipment used

| Model Number | Manufacturer | Description | Serial Number | Last Cal. |
|--------------|-----------------|-----------------|---------------|--------------------|
| ■ - FSV40 | Rohde & Schwarz | Signal Analyzer | 101009 | Jul. 22, 2015 (1Y) |

All test equipment used is calibrated on a regular basis.

7.4 Test data


- Test Date : September 02, 2015
- Test Result : Pass


| CHANNEL | FREQUENCY(MHz) | MEASURED VALUE (MHz) | LIMIT (MHz) | MARGIN (MHz) |
|---------|----------------|----------------------|-------------|--------------|
| Low | 2 405 | 1.60 | 0.5 | 1.10 |
| Middle | 2 440 | 1.60 | 0.5 | 1.10 |
| High | 2 480 | 1.60 | 0.5 | 1.10 |

Remark. Margin = Measured Value - Limit




Tested by: Tae-Ho, Kim / Project Engineer

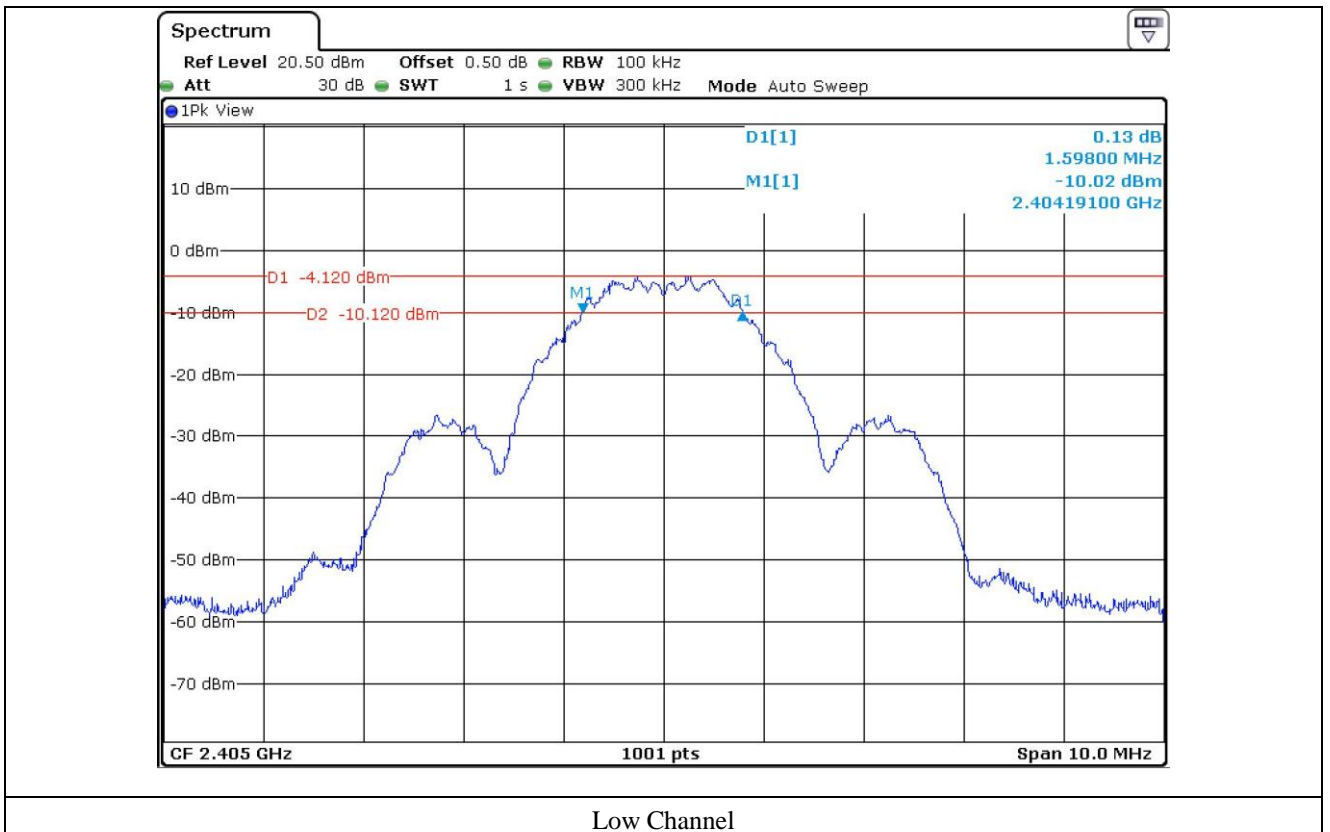

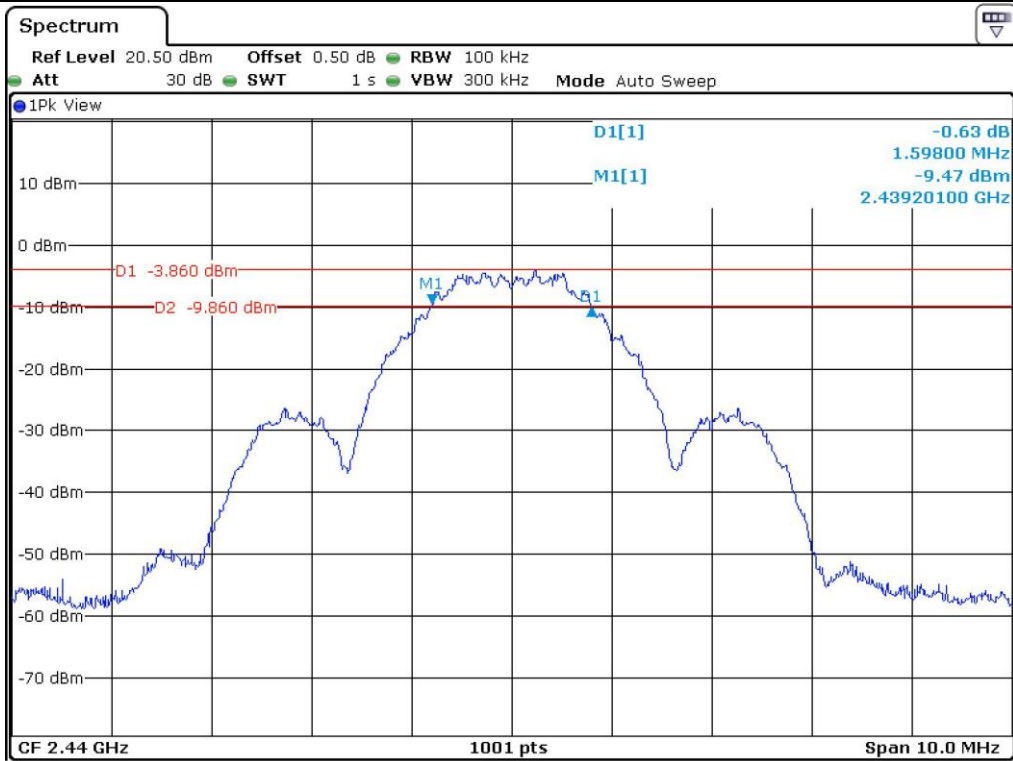

Middle Channel

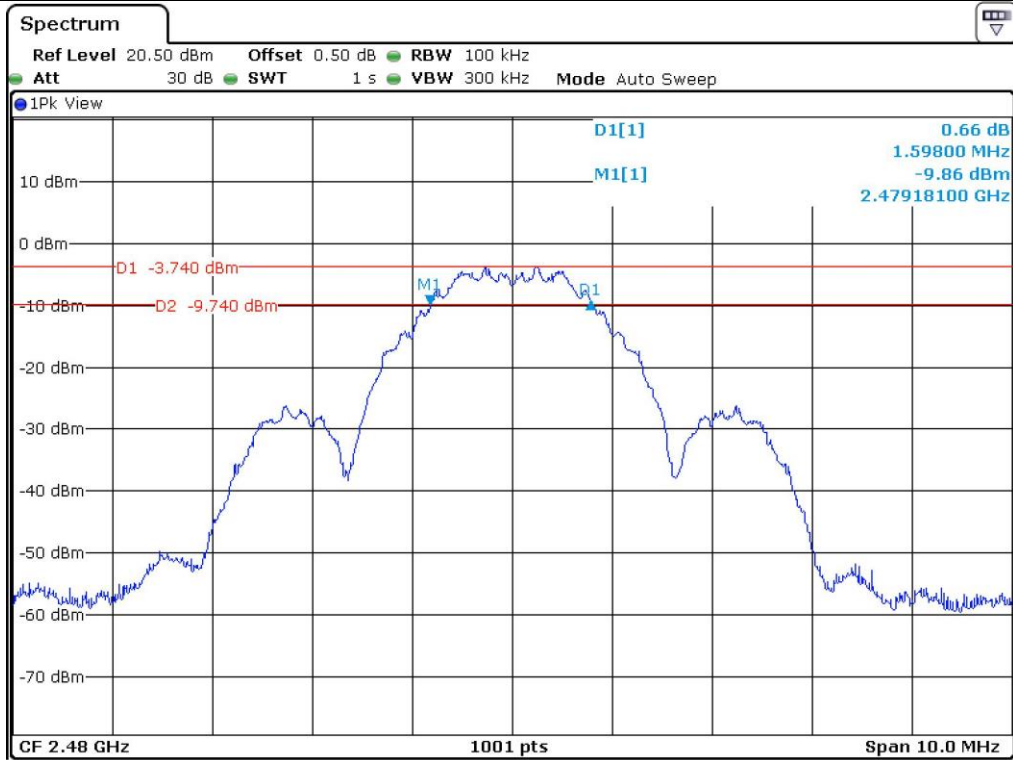

High Channel


8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 50.3 % R.H.

8.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 6 dB bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

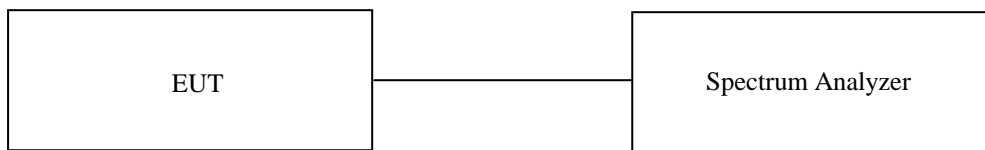

8.3 Test equipment used

| Model Number | Manufacturer | Description | Serial Number | Last Cal. |
|--------------|-----------------|-----------------|---------------|--------------------|
| ■ - FSV40 | Rohde & Schwarz | Signal Analyzer | 101009 | Jul. 22, 2015 (1Y) |

All test equipment used is calibrated on a regular basis.

8.4 Test data


- Test Date : September 02, 2015
- Test Result : Pass


| CHANNEL | FREQUENCY (MHz) | DTS (MHz) | MEASURED VALUE (dBm) | LIMIT (dBm) | MARGIN (dB) |
|---------|-----------------|-----------|----------------------|-------------|-------------|
| LOW | 2 405 | 1.60 | -0.32 | 30 | 30.32 |
| MIDDLE | 2 440 | 1.60 | -0.16 | 30 | 30.16 |
| HIGH | 2 480 | 1.60 | -0.02 | 30 | 30.02 |

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Tae-Ho, Kim / Project Engineer

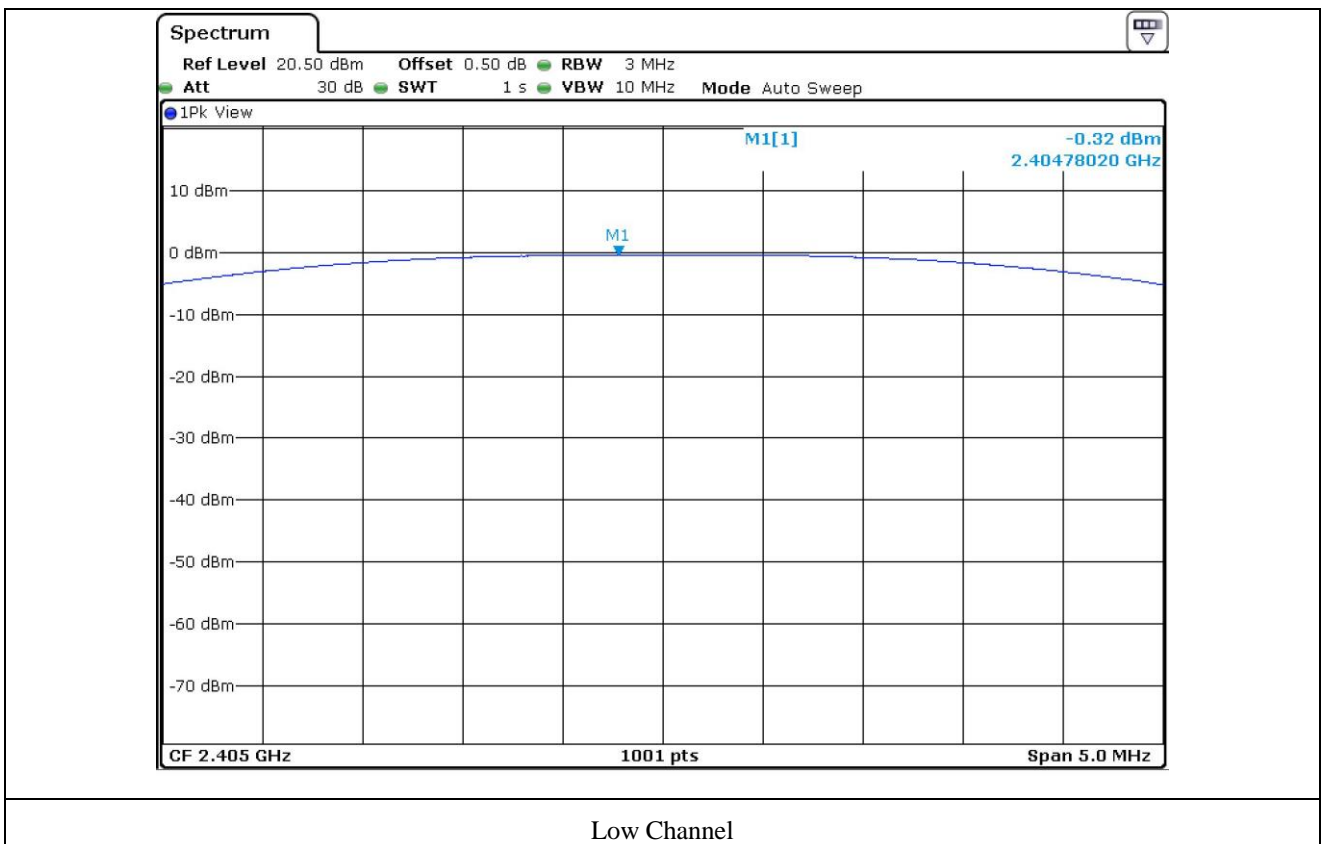

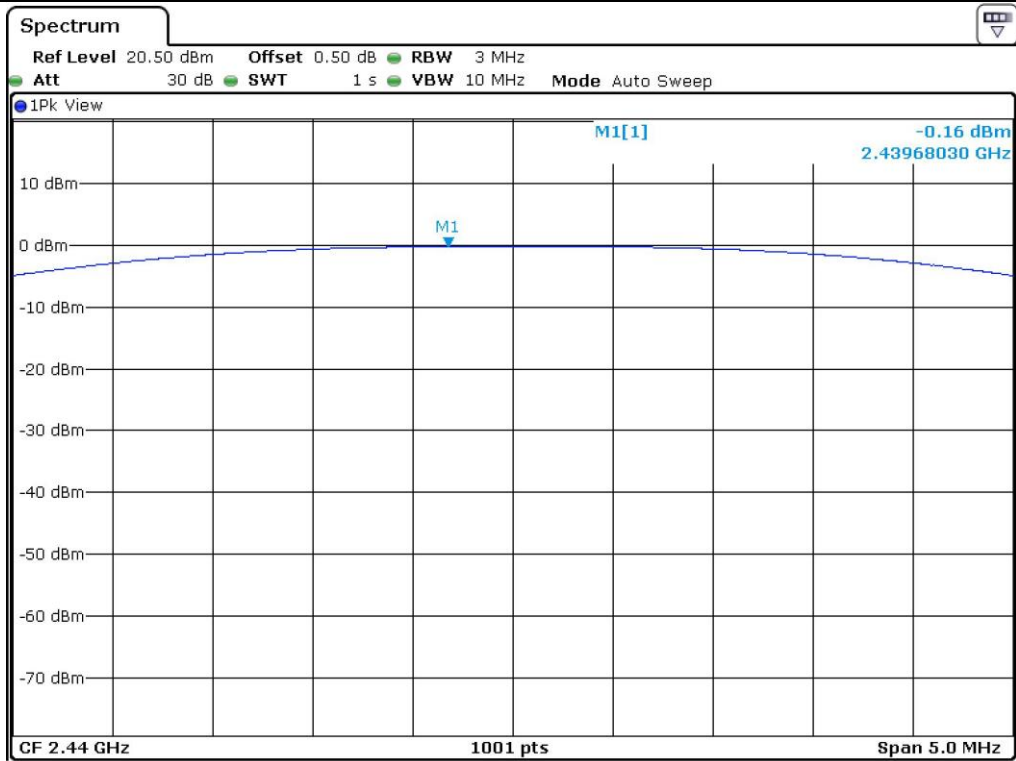

Middle Channel

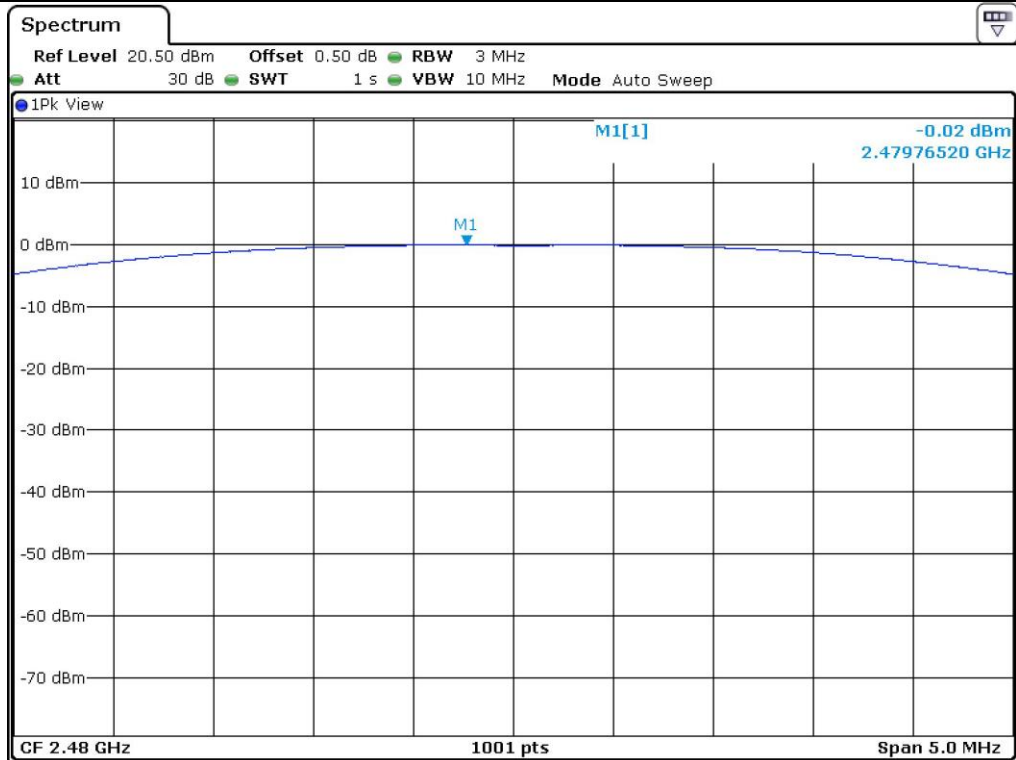

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 50.3 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

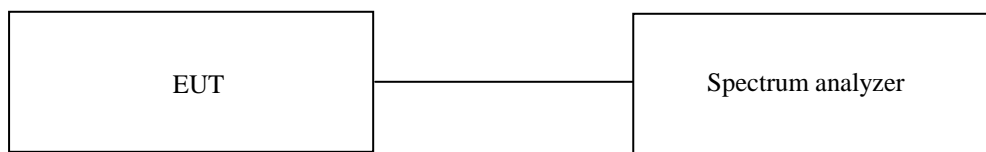

9.3 Test set-up for radiated measurement

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test equipment used


| Model Number | Manufacturer | Description | Serial Number | Last Cal.(Interval) |
|---------------|-------------------|--------------------------|---------------|---------------------|
| ■ - FSV40 | Rohde & Schwarz | Signal Analyzer | 101009 | Jul. 22, 2015 (1Y) |
| ■ - ESU | Rohde & Schwarz | EMI Test Receiver | 100261 | Apr. 29, 2015 (1Y) |
| ■ - 310N | Sonoma Instrument | Pre-Amplifier | 312544 | Apr. 29, 2015 (1Y) |
| ■ - SCU-18 | Rohde & Schwarz | Pre-Amplifier | 10041 | Nov. 25, 2014 (1Y) |
| ■ - DT3000 | Innco System | Turn Table | 930611 | N/A |
| ■ - MA4000-EP | Innco System | Antenna Master | 3320611 | N/A |
| ■ - VULB9163 | Schwarzbeck | TRILOG Broadband Antenna | 9163-421 | Jul. 10, 2014 (2Y) |
| ■ - BBHA9120D | Schwarzbeck | Horn Antenna | BBHA9120D295 | Aug. 31, 2015 (2Y) |
| ■ - BBHA9170 | Schwarzbeck | Horn Antenna | BBHA9170178 | Apr. 30, 2015 (2Y) |

All test equipment used is calibrated on a regular basis.


9.5 Test data for conducted emission

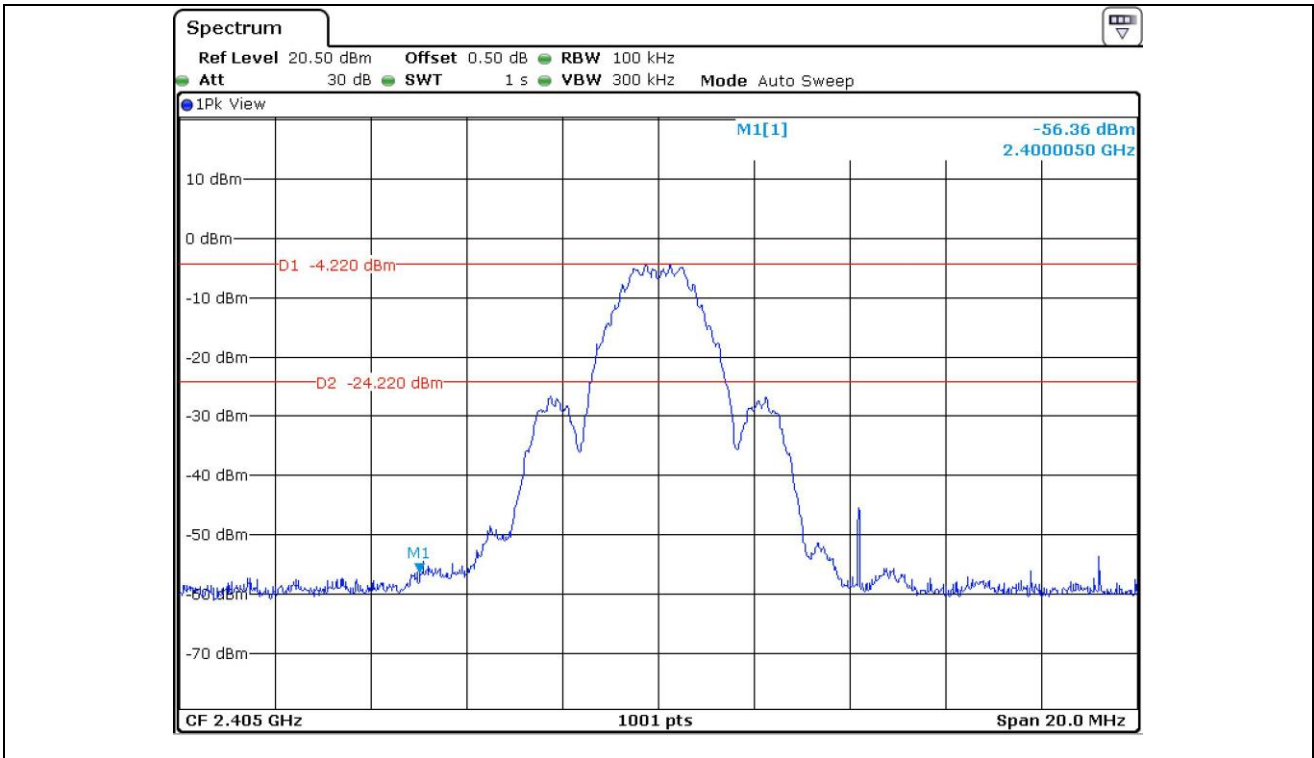


Low Channel

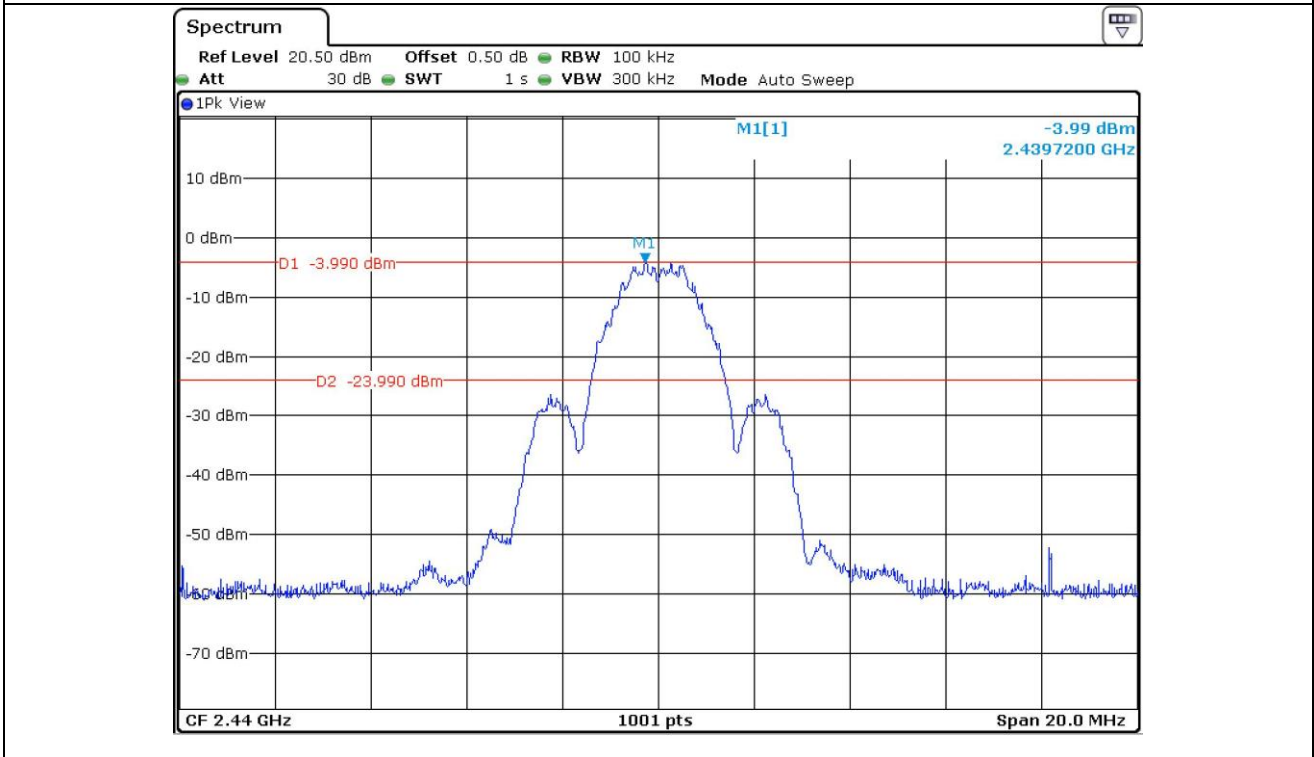


Middle Channel

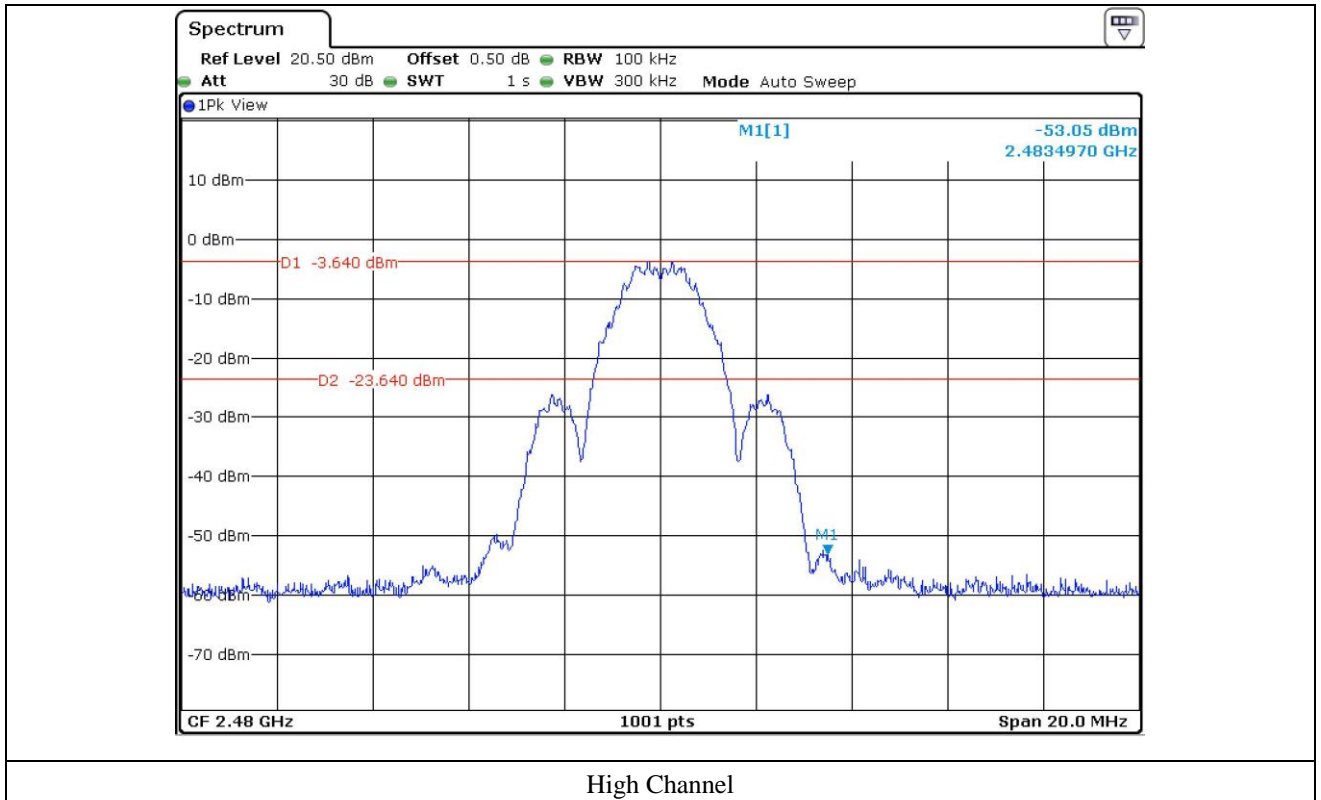


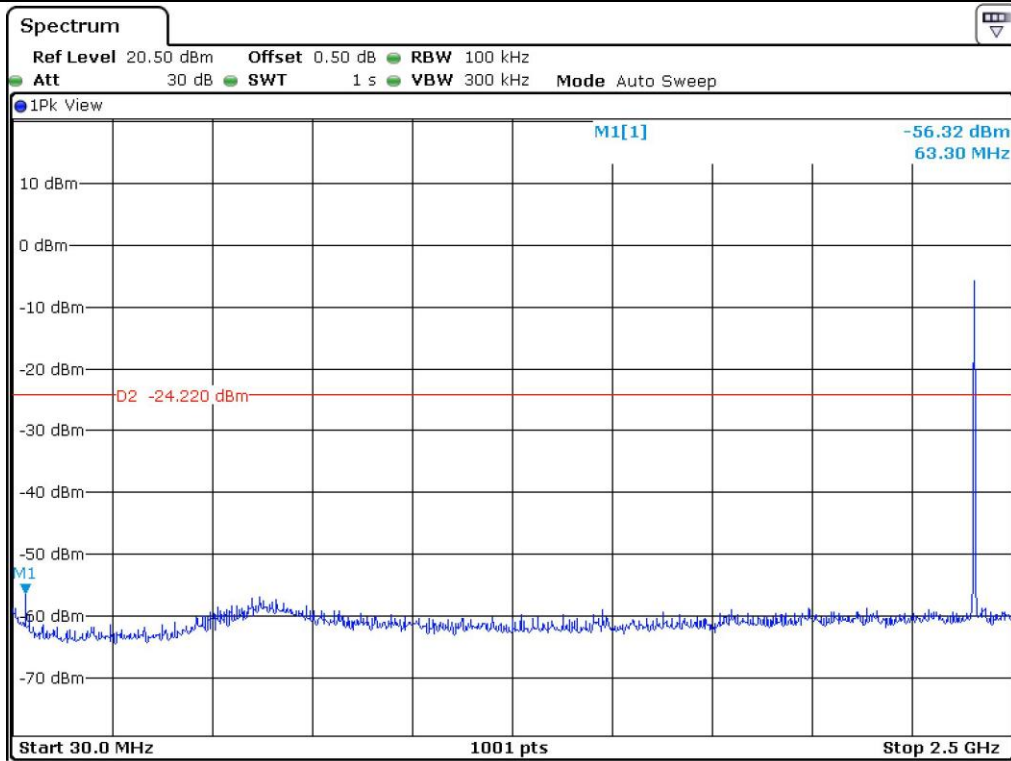


Low Channel

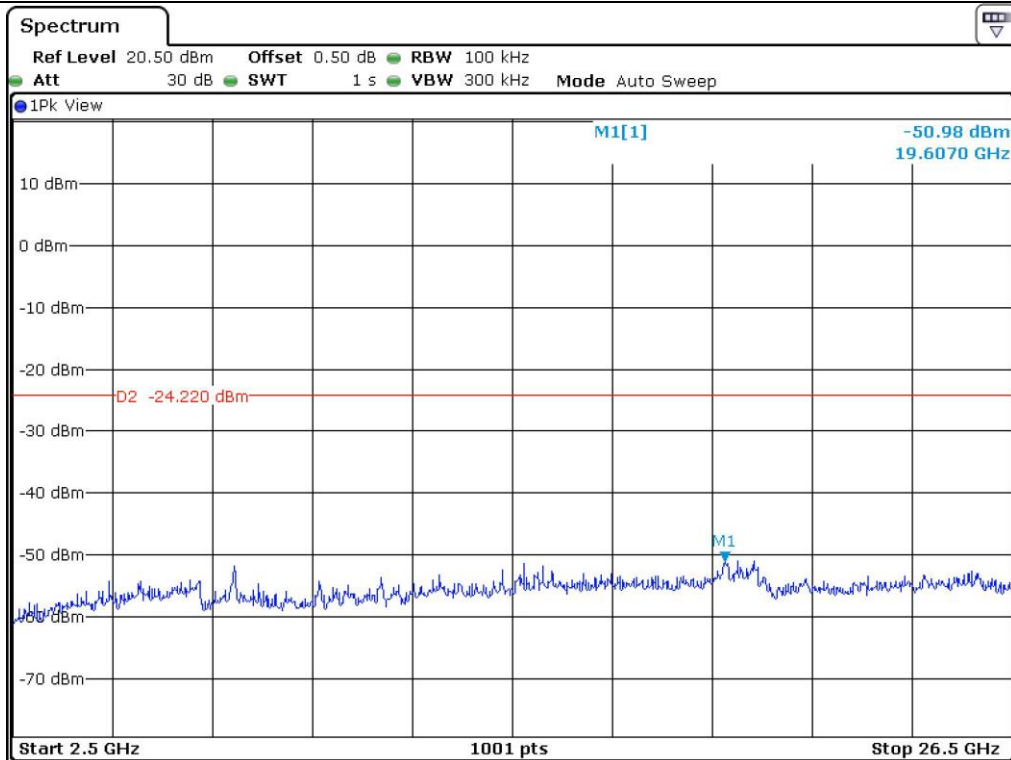


Low Channel

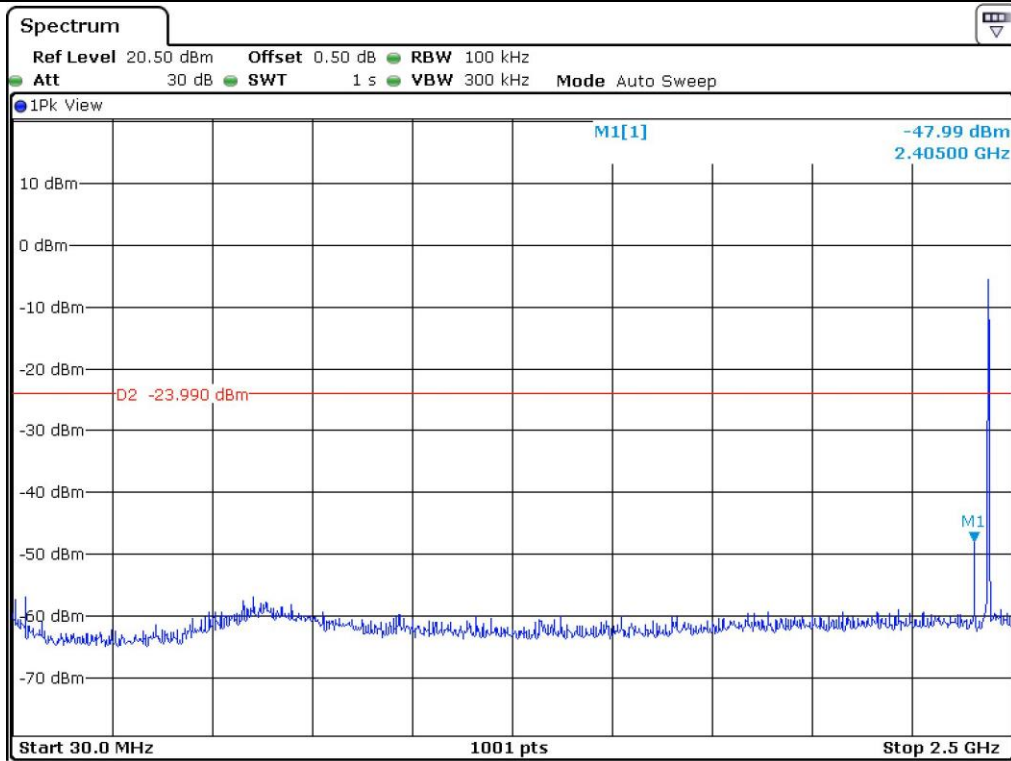


Middle Channel

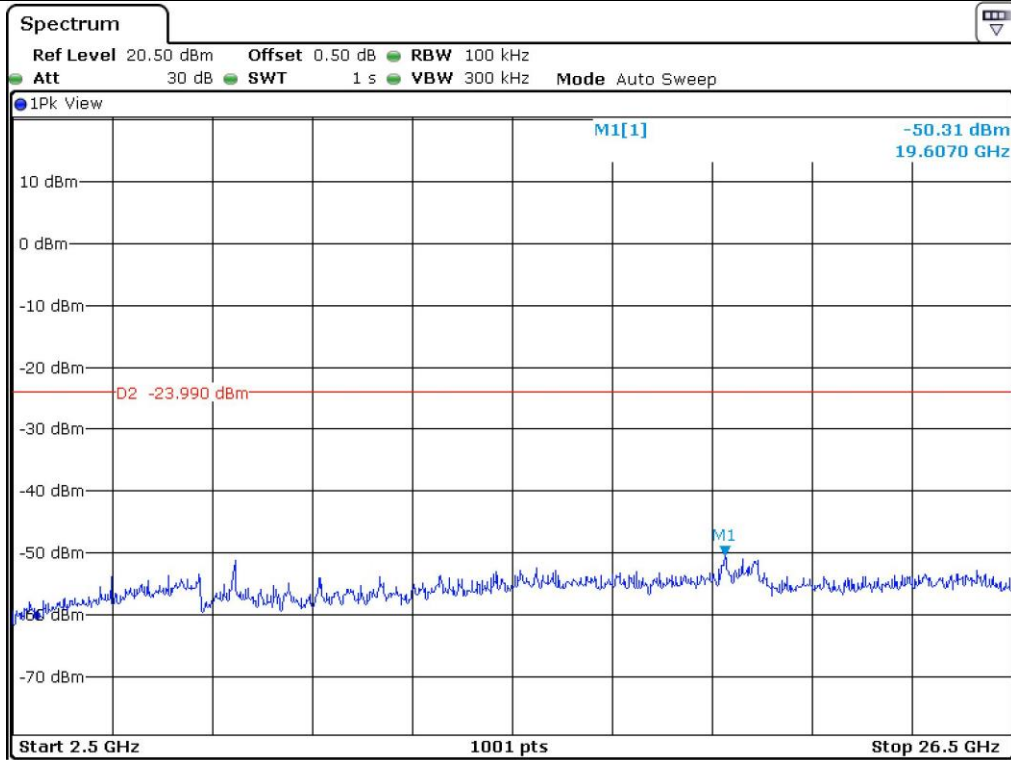

Middle Channel

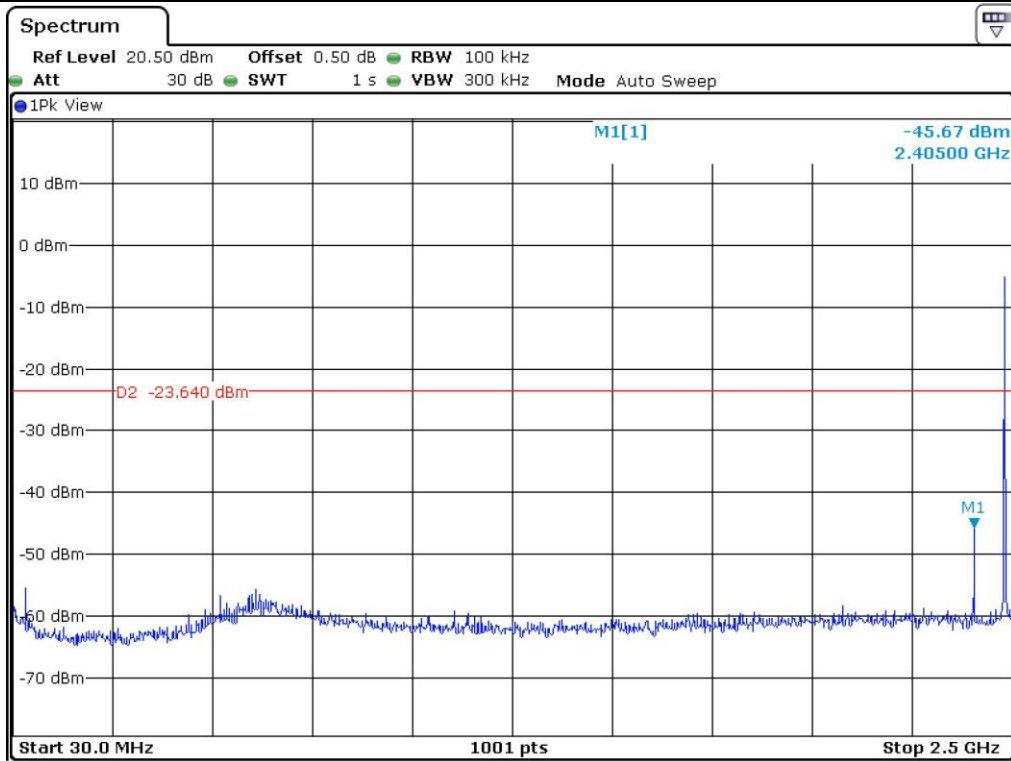

High Channel

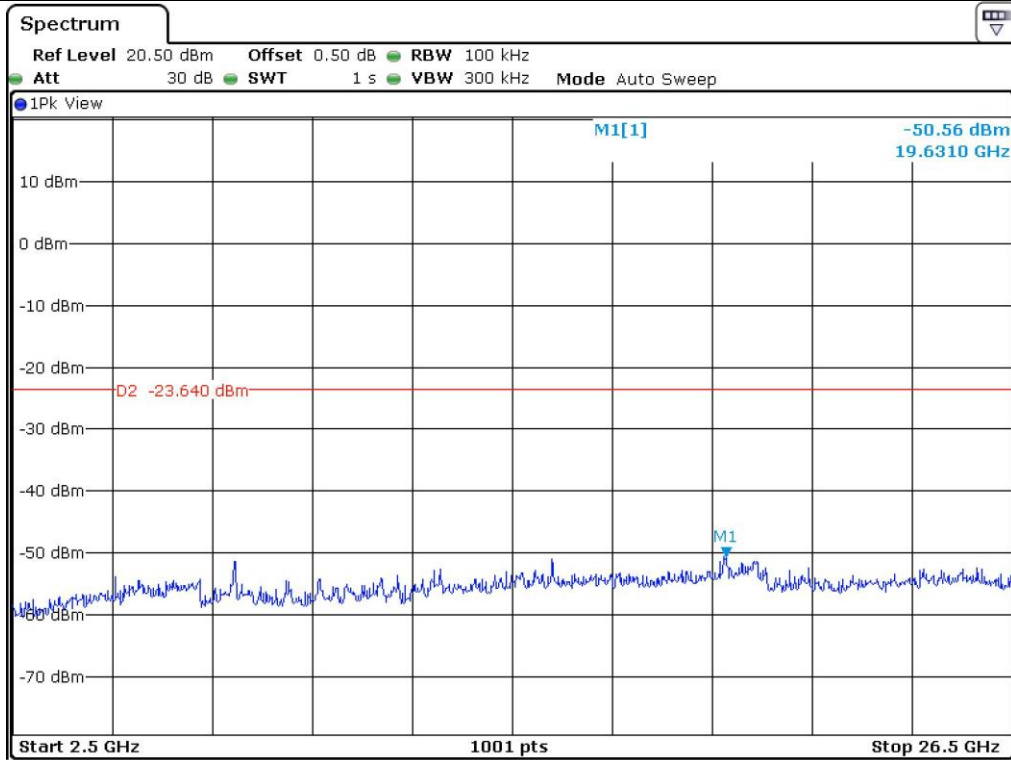

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- Test Date : September 02, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Result : PASSED

| Frequency (MHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | Amp Gain | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------------|----------------|---------------|-----------------|-------------|------------|----------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | |
| 2 390.00 | 44.26 | Peak | H | 27.20 | 7.10 | 43.10 | 35.46 | 74.00 | 38.54 |
| | 33.62 | Average | H | | | | 24.82 | 54.00 | 29.18 |
| | 44.35 | Peak | V | | | | 35.55 | 74.00 | 38.45 |
| | 33.74 | Average | V | | | | 24.94 | 54.00 | 29.06 |
| Test Data for Low Channel | | | | | | | | | |
| 2 400.00 | 45.68 | Peak | H | 27.20 | 7.10 | 43.10 | 36.88 | 74.00 | 37.12 |
| | 34.51 | Average | H | | | | 25.71 | 54.00 | 28.29 |
| | 45.95 | Peak | V | | | | 37.15 | 74.00 | 36.85 |
| | 34.84 | Average | V | | | | 26.04 | 54.00 | 27.96 |
| Test Data for High Channel | | | | | | | | | |
| 2 483.50 | 44.31 | Peak | H | 27.40 | 7.10 | 43.10 | 35.71 | 74.00 | 38.29 |
| | 33.28 | Average | H | | | | 24.68 | 54.00 | 29.32 |
| | 44.65 | Peak | V | | | | 36.05 | 74.00 | 37.95 |
| | 33.85 | Average | V | | | | 25.25 | 54.00 | 28.75 |

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



Tested by: Tae-Ho, Kim / Project Engineer

9.6.2 Spurious & Harmonic Radiated Emission

- Test Date : September 02, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

| Frequency (GHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | Amp Gain | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-------------------------------------|----------------|---------------|-----------------|-------------|------------|----------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | |
| 4 810.00 | 45.58 | Peak | H | 31.10 | 9.60 | 42.40 | 43.88 | 73.98 | 30.10 |
| | 34.25 | Average | H | | | | 32.55 | 53.98 | 21.43 |
| | 46.84 | Peak | V | | | | 45.14 | 73.98 | 28.84 |
| | 34.84 | Average | V | | | | 33.14 | 53.98 | 20.84 |
| Test Data for Middle Channel | | | | | | | | | |
| 4 880.00 | 44.68 | Peak | H | 31.30 | 9.80 | 42.40 | 43.38 | 73.98 | 30.60 |
| | 33.54 | Average | H | | | | 32.24 | 53.98 | 21.74 |
| | 45.32 | Peak | V | | | | 44.02 | 73.98 | 29.96 |
| | 33.94 | Average | V | | | | 32.64 | 53.98 | 21.34 |
| Test Data for High Channel | | | | | | | | | |
| 4 960.00 | 45.51 | Peak | H | 31.30 | 9.90 | 42.30 | 44.41 | 73.98 | 29.57 |
| | 34.28 | Average | H | | | | 33.18 | 53.98 | 20.80 |
| | 44.55 | Peak | V | | | | 43.45 | 73.98 | 30.53 |
| | 34.05 | Average | V | | | | 32.95 | 53.98 | 21.03 |

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



Tested by: Tae-Ho, Kim / Project Engineer

10. PEAK POWER SPECTRAL DENSITY

10.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 50.3 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 3 kHz, the video bandwidth is set to 3 times the resolution bandwidth.



10.3 Test equipment used

| Model Number | Manufacturer | Description | Serial Number | Last Cal. |
|--------------|-----------------|-----------------|---------------|--------------------|
| ■ - FSV40 | Rohde & Schwarz | Signal Analyzer | 101009 | Jul. 22, 2015 (1Y) |

All test equipment used is calibrated on a regular basis.

10.4 Test data


- Test Date : September 02, 2015
- Test Result : Pass
- Operating Condition : Continuous transmitting mode


| CHANNEL | FREQUENCY(MHz) | MEASURED VALUE (dBm) | LIMIT (dBm) | MARGIN (dB) |
|---------|----------------|----------------------|-------------|-------------|
| Low | 2 405 | -14.51 | 8.00 | -22.51 |
| Middle | 2 440 | -16.40 | 8.00 | -24.40 |
| High | 2 480 | -16.42 | 8.00 | -24.42 |

Remark. Margin = Limit – Measured value




Tested by: Tae-Ho, Kim / Project Engineer

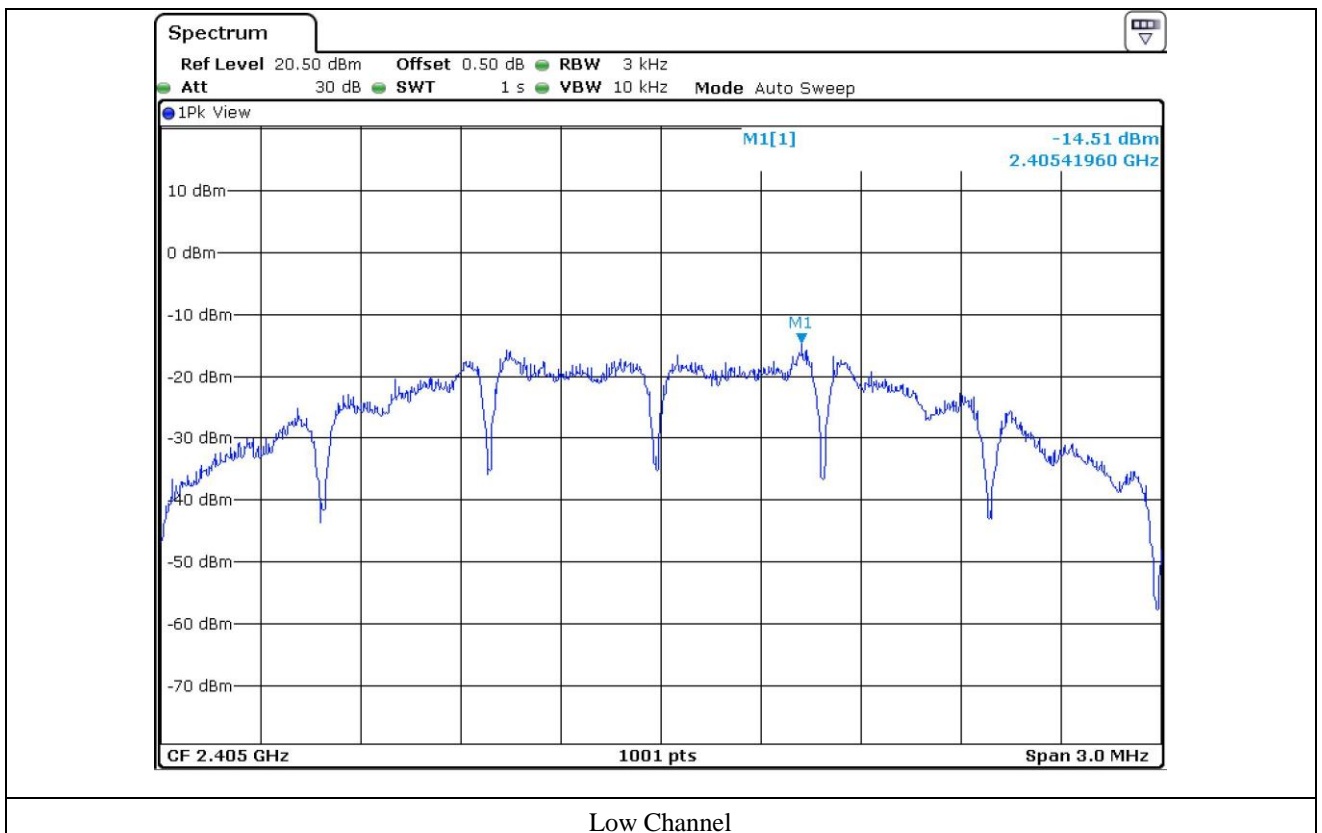

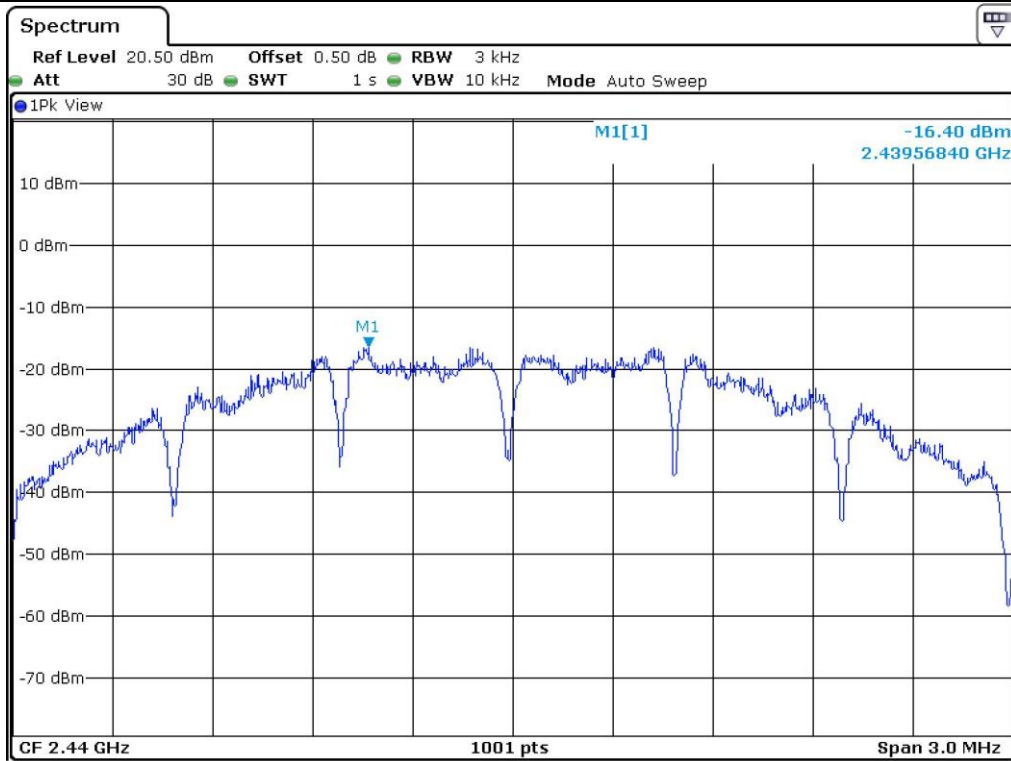

Middle Channel

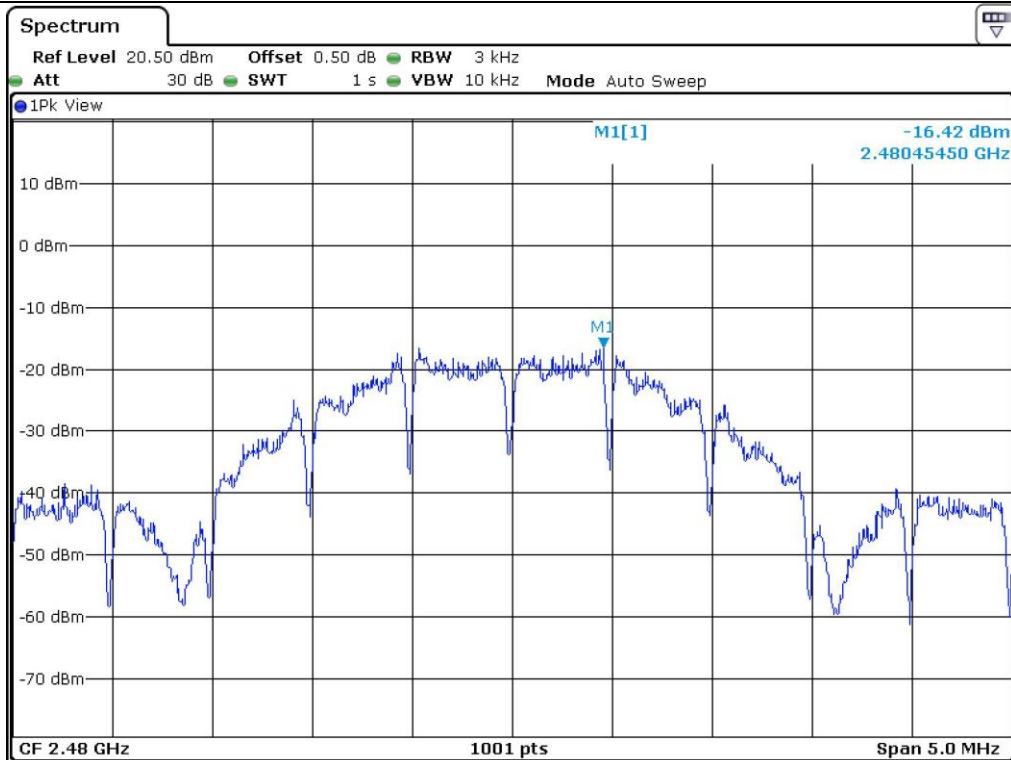

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23.1 °C
 Relative humidity : 50.3 % R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 m, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Test equipment used

| Model Number | Manufacturer | Description | Serial Number | Last Cal.(Interval) |
|---------------|-------------------|--------------------------|---------------|---------------------|
| ■ - FSV40 | Rohde & Schwarz | Signal Analyzer | 101009 | Jul. 22, 2015 (1Y) |
| ■ - ESCI | Rohde & Schwarz | Test Receiver | 101012 | Nov. 03, 2014 (1Y) |
| ■ - 310N | Sonoma Instrument | Pre-Amplifier | 312544 | Apr. 29, 2015 (1Y) |
| ■ - SCU-18 | Rohde & Schwarz | Pre-Amplifier | 10041 | Nov. 25, 2014 (1Y) |
| ■ - DT3000 | Innco System | Turn Table | 930611 | N/A |
| ■ - MA4000-EP | Innco System | Antenna Master | 3320611 | N/A |
| ■ - VULB9163 | Schwarzbeck | TRILOG Broadband Antenna | 9163-421 | Jul. 10, 2014 (2Y) |
| ■ - BBHA9120D | Schwarzbeck | Horn Antenna | BBHA9120D295 | Aug. 31, 2015 (2Y) |
| ■ - BBHA9170 | Schwarzbeck | Horn Antenna | BBHA9170178 | Apr. 30, 2015 (2Y) |

All test equipment used is calibrated on a regular basis.


11.4 Test data

Humidity Level : 50.3 % R.H. Temperature: 23.1 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247
 Result : PASSED

EUT : Electric Shelf Label Date: September 02, 2015


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operating condition : Low Channel

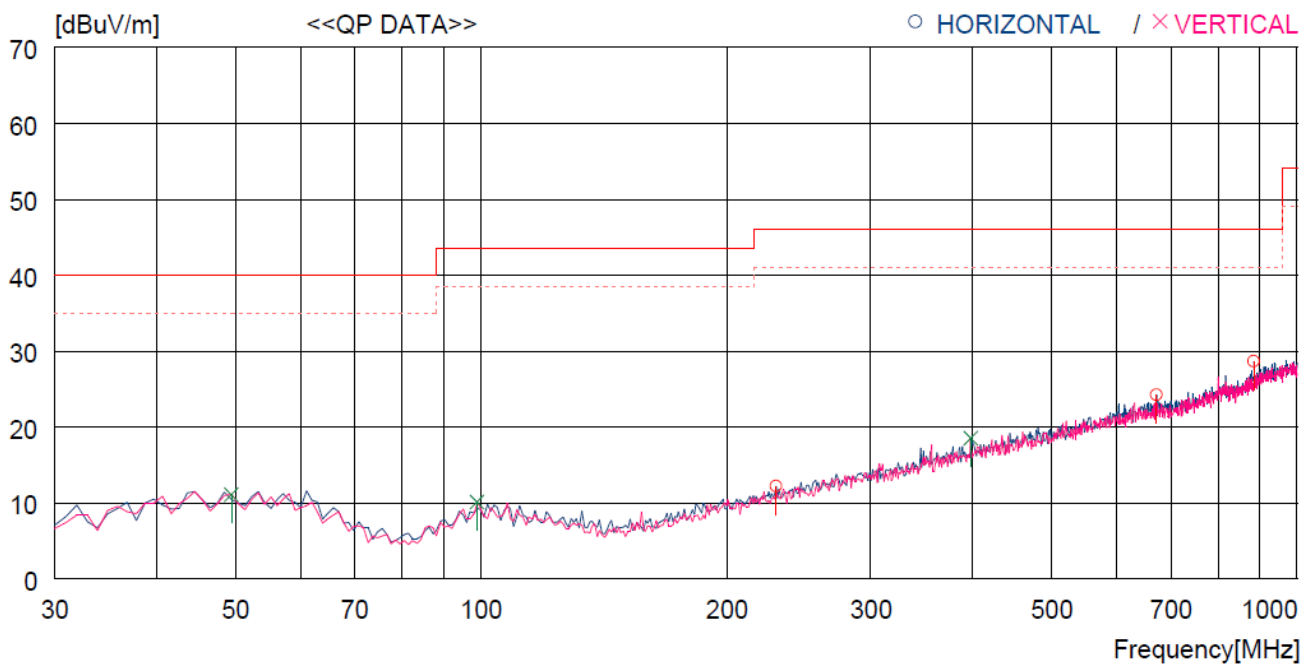


| No. | FREQ [MHz] | READING QP [dBuV] | ANT FACTOR [dB] | LOSS [dB] | GAIN [dB] | RESULT [dBuV/m] | LIMIT [dBuV/m] | MARGIN [dB] | ANTENNA [cm] | TABLE [DEG] |
|------------------------|---------------|-------------------------|-----------------------|--------------|--------------|--------------------|-------------------|----------------|-----------------|----------------|
| ----- Horizontal ----- | | | | | | | | | | |
| 1 | 229.820 | 28.9 | 11.7 | 4.4 | 32.8 | 12.2 | 46.0 | 33.8 | 100 | 0 |
| 2 | 672.136 | 30.4 | 19.5 | 7.8 | 33.5 | 24.2 | 46.0 | 21.8 | 400 | 111 |
| 3 | 884.559 | 30.4 | 22.1 | 9.1 | 33.0 | 28.6 | 46.0 | 17.4 | 300 | 257 |
| ----- Vertical ----- | | | | | | | | | | |
| 4 | 49.400 | 28.4 | 13.7 | 2.0 | 33.0 | 11.1 | 40.0 | 28.9 | 400 | 354 |
| 5 | 98.870 | 28.8 | 11.7 | 2.9 | 33.3 | 10.1 | 43.5 | 33.4 | 300 | 347 |
| 6 | 397.630 | 29.5 | 15.8 | 5.9 | 32.7 | 18.5 | 46.0 | 27.5 | 300 | 61 |

Operating condition : Middle Channel

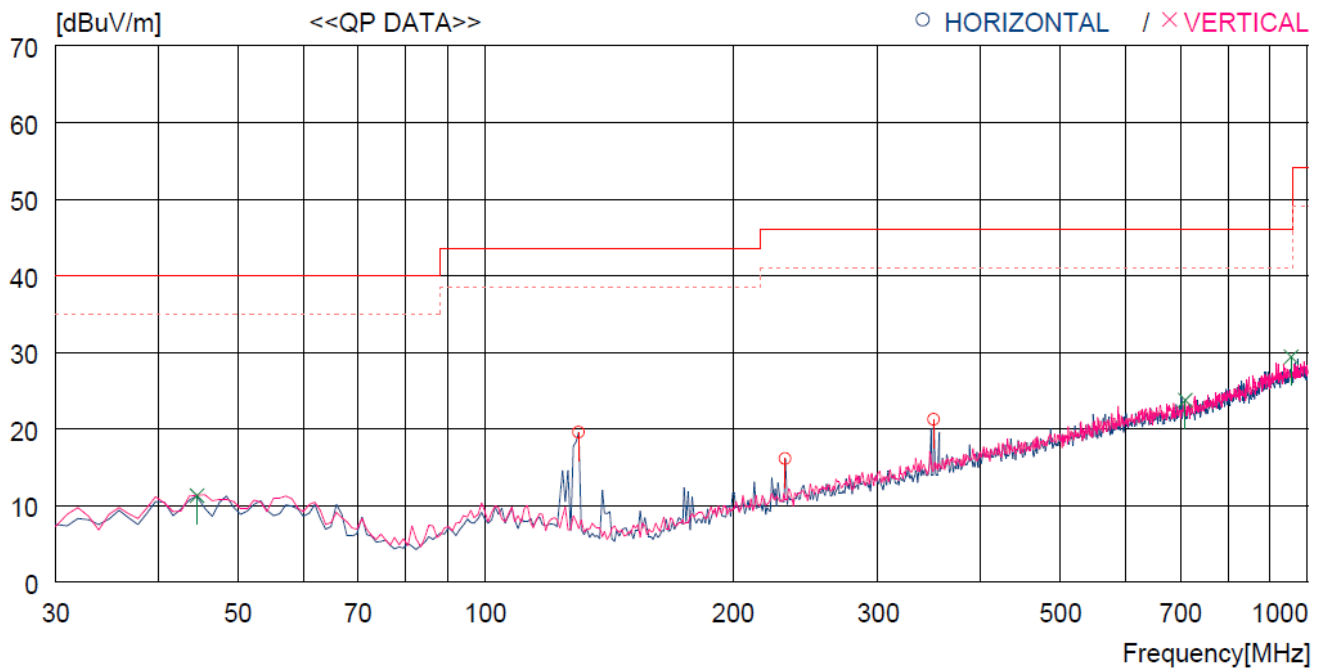

| No. | FREQ [MHz] | READING QP [dBuV] | ANT FACTOR [dB] | LOSS [dB] | GAIN [dB] | RESULT [dBuV/m] | LIMIT [dBuV/m] | MARGIN [dB] | ANTENNA [cm] | TABLE [DEG] |
|------------------------|---------------|-------------------------|-----------------------|--------------|--------------|--------------------|-------------------|----------------|-----------------|----------------|
| ----- Horizontal ----- | | | | | | | | | | |
| 1 | 129.910 | 40.1 | 9.2 | 3.3 | 33.1 | 19.5 | 43.5 | 24.0 | 356 | 0 |
| 2 | 231.760 | 32.7 | 11.8 | 4.4 | 32.8 | 16.1 | 46.0 | 29.9 | 356 | 0 |
| 3 | 351.070 | 33.5 | 14.8 | 5.5 | 32.6 | 21.2 | 46.0 | 24.8 | 400 | 46 |
| ----- Vertical ----- | | | | | | | | | | |
| 4 | 44.550 | 28.4 | 13.9 | 1.9 | 32.9 | 11.3 | 40.0 | 28.7 | 400 | 359 |
| 5 | 708.995 | 29.5 | 19.8 | 8.1 | 33.7 | 23.7 | 46.0 | 22.3 | 300 | 5 |
| 6 | 954.397 | 29.7 | 22.5 | 9.5 | 32.3 | 29.4 | 46.0 | 16.6 | 300 | 0 |

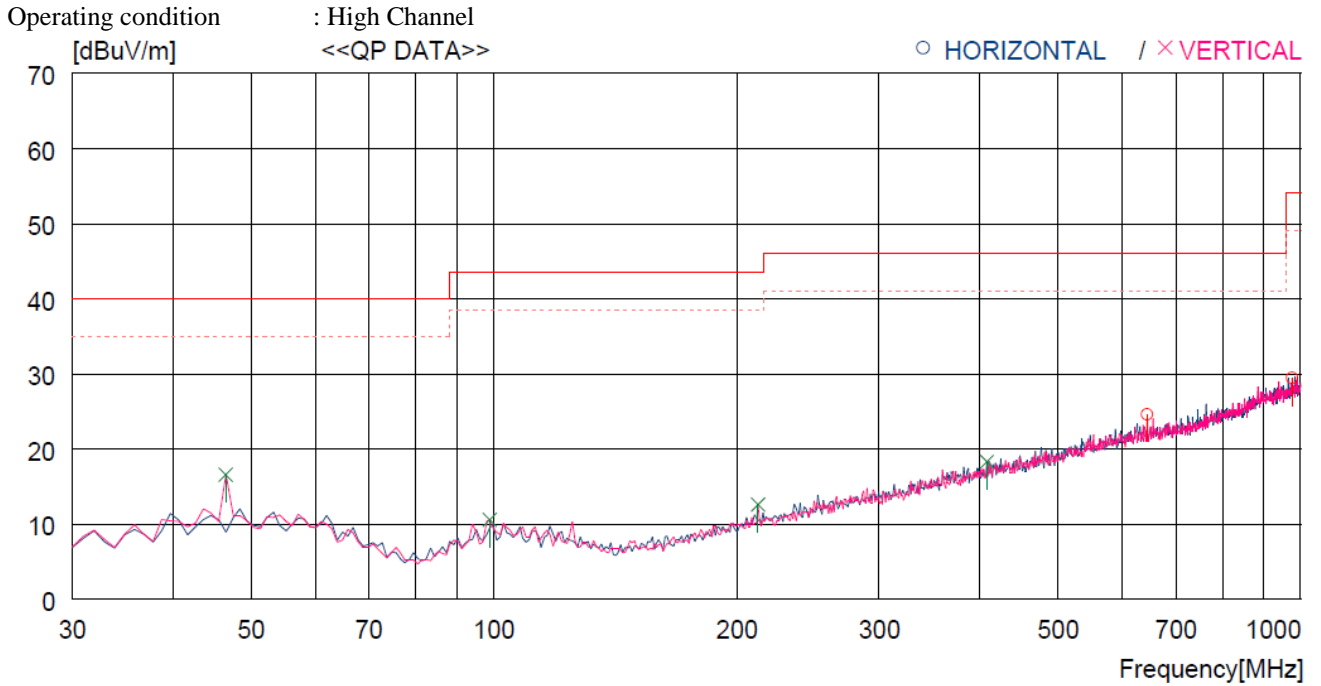

| No. | FREQ [MHz] | READING QP [dBuV] | ANT FACTOR [dB] | LOSS [dB] | GAIN [dB] | RESULT [dBuV/m] | LIMIT [dBuV/m] | MARGIN [dB] | ANTENNA [cm] | TABLE [DEG] |
|------------------------|------------|-------------------|-----------------|-----------|-----------|-----------------|----------------|-------------|--------------|-------------|
| ----- Horizontal ----- | | | | | | | | | | |
| 1 | 644.977 | 31.0 | 19.4 | 7.6 | 33.4 | 24.6 | 46.0 | 21.4 | 300 | 0 |
| 2 | 975.737 | 29.2 | 22.6 | 9.6 | 32.0 | 29.4 | 54.0 | 24.6 | 300 | 0 |
| ----- Vertical ----- | | | | | | | | | | |
| 3 | 46.490 | 33.6 | 13.9 | 2.0 | 32.9 | 16.6 | 40.0 | 23.4 | 200 | 0 |
| 4 | 98.870 | 29.3 | 11.7 | 2.9 | 33.3 | 10.6 | 43.5 | 32.9 | 200 | 0 |
| 5 | 212.360 | 30.0 | 11.2 | 4.2 | 32.8 | 12.6 | 43.5 | 30.9 | 100 | 230 |
| 6 | 408.300 | 29.1 | 16.0 | 5.9 | 32.7 | 18.3 | 46.0 | 27.7 | 400 | 271 |

Tested by: Tae-Ho, Kim / Project Engineer

11.4.1 Test data for Below 30 MHz

- . Test Date : September 02, 2015
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

| Frequency (MHz) | Reading (dB μ V) | Ant. Pol. (H/V) | Ant. Height (m) | Angle (°) | Ant. Factor (dB/m) | Cable Loss | Emission Level(dB μ V/m) | Limits (dB μ V/m) | Margin (dB) |
|-------------------------------------------------|----------------------|-----------------|-----------------|-----------|--------------------|------------|------------------------------|-----------------------|-------------|
| It was not observed any emissions from the EUT. | | | | | | | | | |

11.4.2 Test data for above 1 GHz

- . Test Date : September 02, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

| Frequency (MHz) | Reading (dB μ V) | Ant. Pol. (H/V) | Ant. Height (m) | Angle (°) | Ant. Factor (dB/m) | Cable Loss | Emission Level(dB μ V/m) | Limits (dB μ V/m) | Margin (dB) |
|-------------------------------------------------|----------------------|-----------------|-----------------|-----------|--------------------|------------|------------------------------|-----------------------|-------------|
| It was not observed any emissions from the EUT. | | | | | | | | | |



Tested by: Tae-Ho, Kim / Project Engineer