

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W15OR-D024
AGR No. : A159A-200
Applicant : LG Innotek Co., Ltd.
Address : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731 Korea
Manufacturer : LG Innotek Co., Ltd.
Address : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731 Korea
Type of Equipment : Wi-Fi/BT Combo module
FCC ID. : YZP-TWCMK005D
Model Name : TWCM-K005D
Multiple Model Name : TWCM-K010D
Serial number : N/A
Total page of Report : 84 pages (including this page)
Date of Incoming : September 16, 2015
Date of issue : October 23, 2015

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by: 

 Ki-Hong, Nam / Asst, Chief Engineer
 ONETECH Corp.

Approved by: 

 Sung-Ik, Han/ Managing Director
 ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY	7
2.6 TEST FACILITY	7
3. GENERAL INFORMATION	8
3.1 PRODUCT DESCRIPTION	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT	9
4. EUT MODIFICATIONS	9
5. SYSTEM TEST CONFIGURATION	10
5.1 JUSTIFICATION	10
5.2 PERIPHERAL EQUIPMENT	10
5.3 CONFIGURATION OF TEST SYSTEM	10
5.4 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	11
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	11
6.2 GENERAL RADIATED EMISSIONS TESTS	11
7. MINIMUM 20 DB BANDWIDTH	12
7.1 OPERATING ENVIRONMENT	12
7.2 TEST SET-UP	12
7.3 TEST EQUIPMENT USED	12
7.4 TEST DATA FOR 1 MBPS	13
7.5 TEST DATA FOR 2 MBPS	15
7.6 TEST DATA FOR 3 MBPS	17
8. HOPPING FREQUENCY SEPARATION	19
8.1 OPERATING ENVIRONMENT	19
8.2 TEST SET-UP	19

8.3 TEST EQUIPMENT USED	19
8.4 TEST DATA FOR 1 MBPS	20
8.5 TEST DATA FOR 2 MBPS	21
8.6 TEST DATA FOR 3 MBPS	22
9. NUMBER OF HOPPING CHANNELS	23
9.1 OPERATING ENVIRONMENT	23
9.2 TEST SET-UP	23
9.3 TEST EQUIPMENT USED	23
9.4 TEST DATA FOR 1 MBPS	24
9.5 TEST DATA FOR 2 MBPS	27
9.6 TEST DATA FOR 3 MBPS	30
10. TIME OF OCCUPANCY	33
10.1 OPERATING ENVIRONMENT	33
10.2 TEST SET-UP	33
10.3 TEST EQUIPMENT USED	33
10.4 TEST DATA FOR 1 MBPS	34
10.5 TEST DATA FOR 2 MBPS	37
10.6 TEST DATA FOR 3 MBPS	40
11. MAXIMUM PEAK OUTPUT POWER	43
11.1 OPERATING ENVIRONMENT	43
11.2 TEST SET-UP	43
11.3 TEST EQUIPMENT USED	43
11.4 TEST DATA FOR 1 MBPS	44
11.5 TEST DATA FOR 2 MBPS	46
11.6 TEST DATA FOR 3 MBPS	48
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	50
12.1 OPERATING ENVIRONMENT	50
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	50
12.3 TEST SET-UP FOR RADIATED MEASUREMENT	50
12.4 TEST EQUIPMENT USED	50
12.5 TEST DATA FOR CONDUCTED EMISSION	51
12.5.1 Test data for 1 Mbps	51
12.5.2 Test data for 2 Mbps	57
12.5.3 Test data for 3 Mbps	63
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	69

12.6.1 Radiated Emission which fall in the Restricted Band.....	69
12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz.....	72
13. RADIATED EMISSION TEST	75
13.1 OPERATING ENVIRONMENT	75
13.2 TEST SET-UP	75
13.3 TEST EQUIPMENT USED.....	75
13.4 TEST DATA FOR 1 MBPS	76
13.4.1 Test data for 30 MHz ~ 1 000 MHz.....	76
13.4.2 Test data for Below 30 MHz.....	77
13.4.3 Test data for above 1 GHz	77
13.5 TEST DATA FOR 2 MBPS	78
13.5.1 Test data for 30 MHz ~ 1 000 MHz.....	78
13.5.2 Test data for Below 30 MHz.....	79
13.5.3 Test data for above 1 GHz	79
13.6 TEST DATA FOR 3 MBPS	80
13.6.1 Test data for 30 MHz ~ 1 000 MHz.....	80
13.6.2 Test data for Below 30 MHz.....	81
13.6.3 Test data for above 1 GHz	81
14. CONDUCTED EMISSION TEST	82
14.1 OPERATING ENVIRONMENT	82
14.2 TEST SET-UP	82
14.3 TEST EQUIPMENT USED.....	82
14.4 TEST DATA.....	83

Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
W15OR-D024	October 23, 2015	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.
 Address : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731 Korea
 Contact Person : Inchang, Jeong / Director
 Telephone No. : +82-62-950-0332
 FCC ID : YZP-TWCMK005D
 Model Name : TWCM-K005D
 Serial Number : N/A
 Date : October 23, 2015

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Modular Transmitter, Wi-Fi/BT Combo module
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (b) (5)	Radio Frequency Exposure Level	Met requirement / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 301-14, Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862 Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-666/ T-1842 IC (Industry Canada) – Registration No. Site# 3736-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation No. 85

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

HEAD OFFICE : 301-14 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

EMC Testing Div. : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea (TEL: 82-31-765-8289, FAX: 82-31-766-2904)

3. GENERAL INFORMATION

3.1 Product Description

The LG Innotek Co., Ltd., Model TWCM-K005D (referred to as the EUT in this report) is a Wi-Fi/BT Combo module. Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Wi-Fi/BT Combo module			
FREQUENCY RANGE	Bluetooth	2 402 MHz ~ 2 480 MHz		
	Bluetooth LE	2 402 MHz ~ 2 480 MHz		
	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20)) 2 422 MHz ~ 2 452 MHz (802.11n(HT40))		
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz_20 MHz BW	
			5 190 MHz ~ 5 230 MHz_40 MHz BW	
		5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz_20 MHz BW	
5 755 MHz ~ 5 795 MHz_40 MHz BW				
MAX. RF OUTPUT POWER	Bluetooth	1 Mbps	8.57 dBm	
		2 Mbps	9.38 dBm	
		3 Mbps	9.48 dBm	
	Bluetooth LE	3.80 dBm		
	WLAN 2.4 GHz Band	Ant.0	Wi-Fi 802.11b (14.04 dBm) Wi-Fi 802.11g (12.78 dBm) Wi-Fi 802.11n_20 MHz (11.73 dBm) Wi-Fi 802.11n_40 MHz (11.07 dBm)	
		Ant.1	Wi-Fi 802.11b (14.15 dBm) Wi-Fi 802.11g (12.69 dBm) Wi-Fi 802.11n_20 MHz (11.71 dBm) Wi-Fi 802.11n_40 MHz (11.05 dBm)	
	WLAN 5 GHz Band	Ant.0	5 150 MHz ~ 5 250 MHz Band	Wi-Fi 802.11a (11.05 dBm) Wi-Fi 802.11n_20 MHz (10.15 dBm) Wi-Fi 802.11n_40 MHz (8.31 dBm)
			5 725 MHz ~ 5 850 MHz Band	Wi-Fi 802.11a (10.06 dBm) Wi-Fi 802.11n_20 MHz (8.61 dBm) Wi-Fi 802.11n_40 MHz (7.31 dBm)
		Ant.1	5 150 MHz ~ 5 250 MHz Band	Wi-Fi 802.11a (11.09 dBm) Wi-Fi 802.11n_20 MHz (10.01 dBm) Wi-Fi 802.11n_40 MHz (8.48 dBm)
			5 725 MHz ~ 5 850 MHz Band	Wi-Fi 802.11a (10.09 dBm) Wi-Fi 802.11n_20 MHz (8.61 dBm) Wi-Fi 802.11n_40 MHz (7.46 dBm)

MODULATION TYPE	Bluetooth	GFSK for 1 Mbps, DQPSK for 2 Mbps, 8-DPSK for 3 Mbps
	Bluetooth LE	GFSK
	WLAN 2.4 GHz Band	DSSS Modulation(DBPSK/DQPSK/CCK)
	WLAN 5 GHz Band	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
Antenna Gain	2.4 GHz Band [BT(BDR / EDR / LE)]	0.80 dBi
	2.4 GHz Band [WLAN]	Antenna 0 : 1.18 dBi
		Antenna 1 : 1.21 dBi
	5 GHz Band [5 150 MHz ~ 5 250 MHz Band]	Antenna 0 : 1.71 dBi
		Antenna 1 : 1.39 dBi
	5 GHz Band [5 725 MHz ~ 5 850 MHz Band]	Antenna 0 : 1.10 dBi
		Antenna 1 : 0.56 dBi
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	40 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
TWCM-K005D	Basic Model	<input checked="" type="checkbox"/>
TWCM-K010D	These models are identical to basic model except for the model name only.	<input type="checkbox"/>

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Innotek Co., Ltd.	WiFi+BT MODULE	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
TWCM-K005D	LG Innotek Co., Ltd.	Wi-Fi/BT Combo module (EUT)	Notebook PC
PP11L	DELL	Notebook PC	EUT

5.3 Configuration of Test System

Line Conducted Test: The jig board of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.
The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.4 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is WLAN PIFA antenna and Bluetooth/BLE PIFA antenna, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 21.4 °C
 Relative humidity : 45.1 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

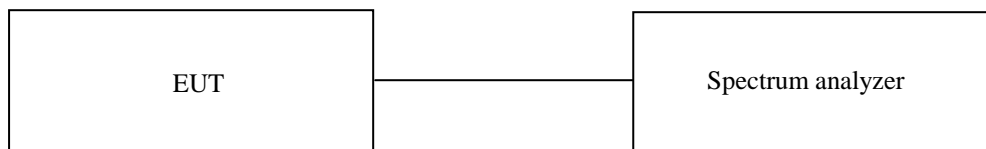

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


7.4 Test data for 1 Mbps


- Test Date : September 26, 2015

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	869.10
Middle	2 441	864.10
High	2 480	864.10




Tested by: Hyung-Kwon, Oh / Engineer

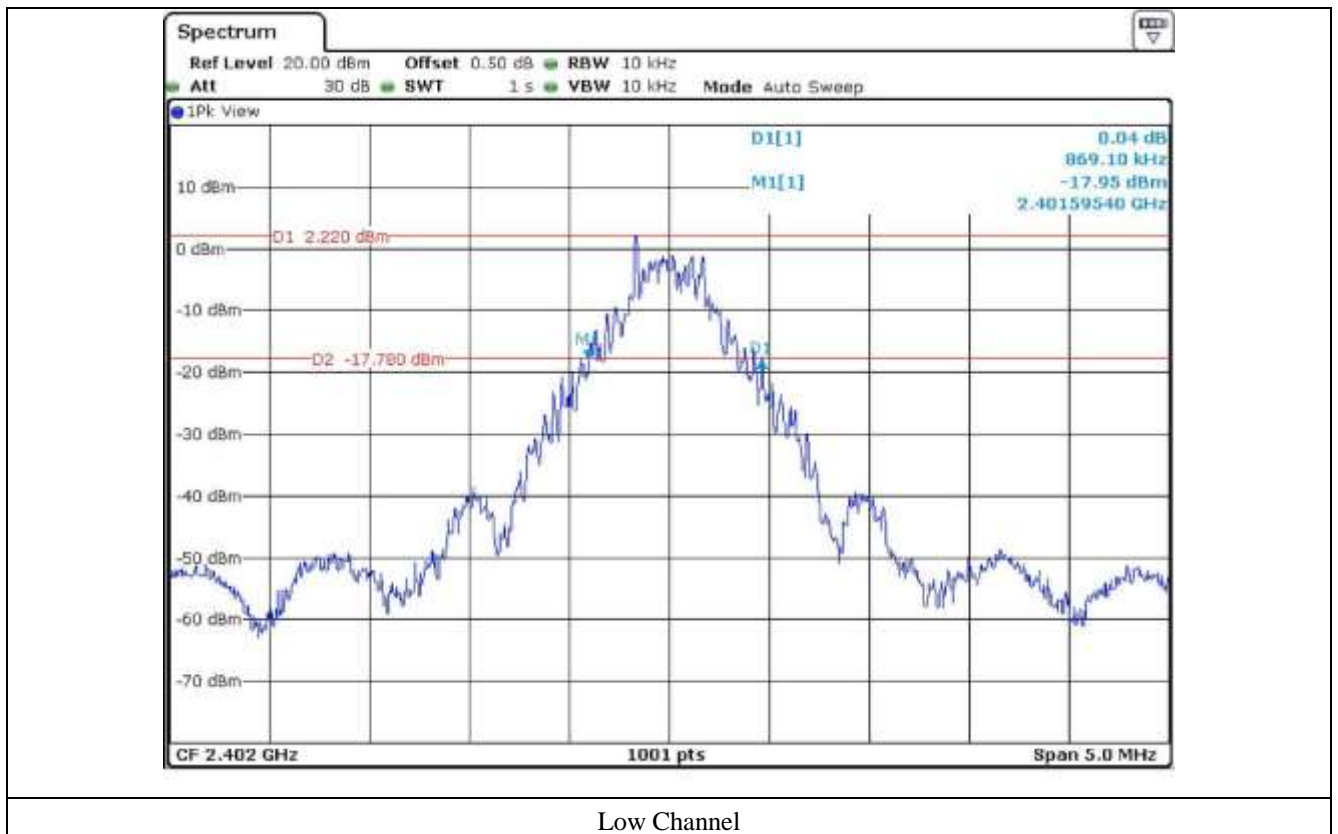

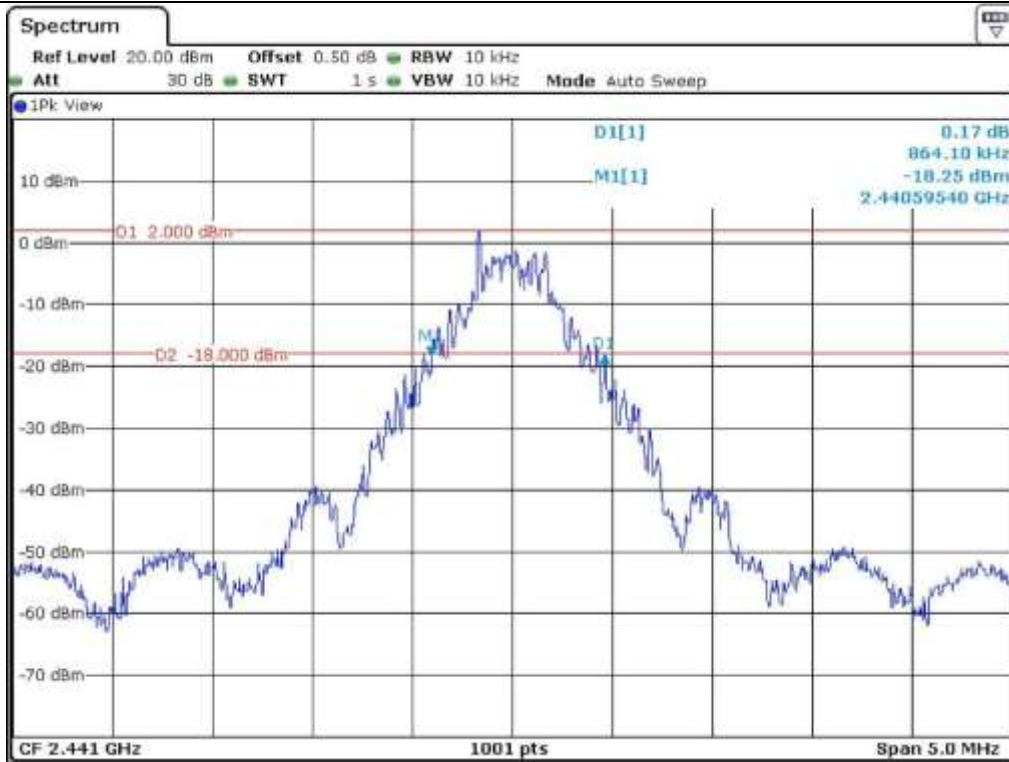

Middle Channel

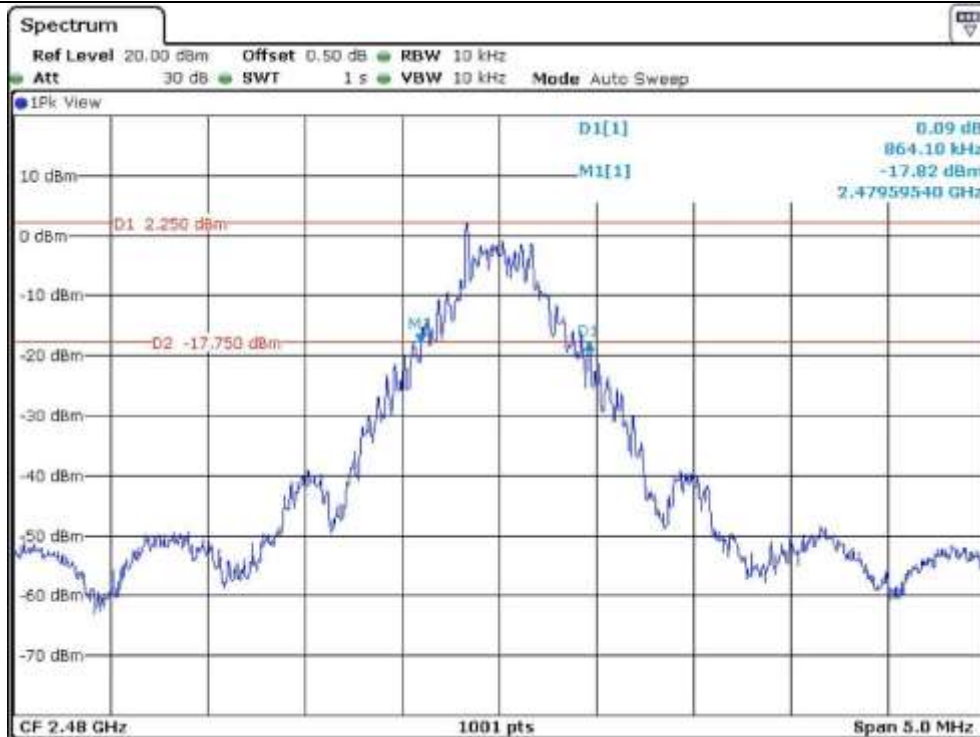

High Channel


7.5 Test data for 2 Mbps


- Test Date : September 26, 2015

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 183.80
Middle	2 441	1 183.80
High	2 480	1 183.80




Tested by: Hyung-Kwon, Oh / Engineer

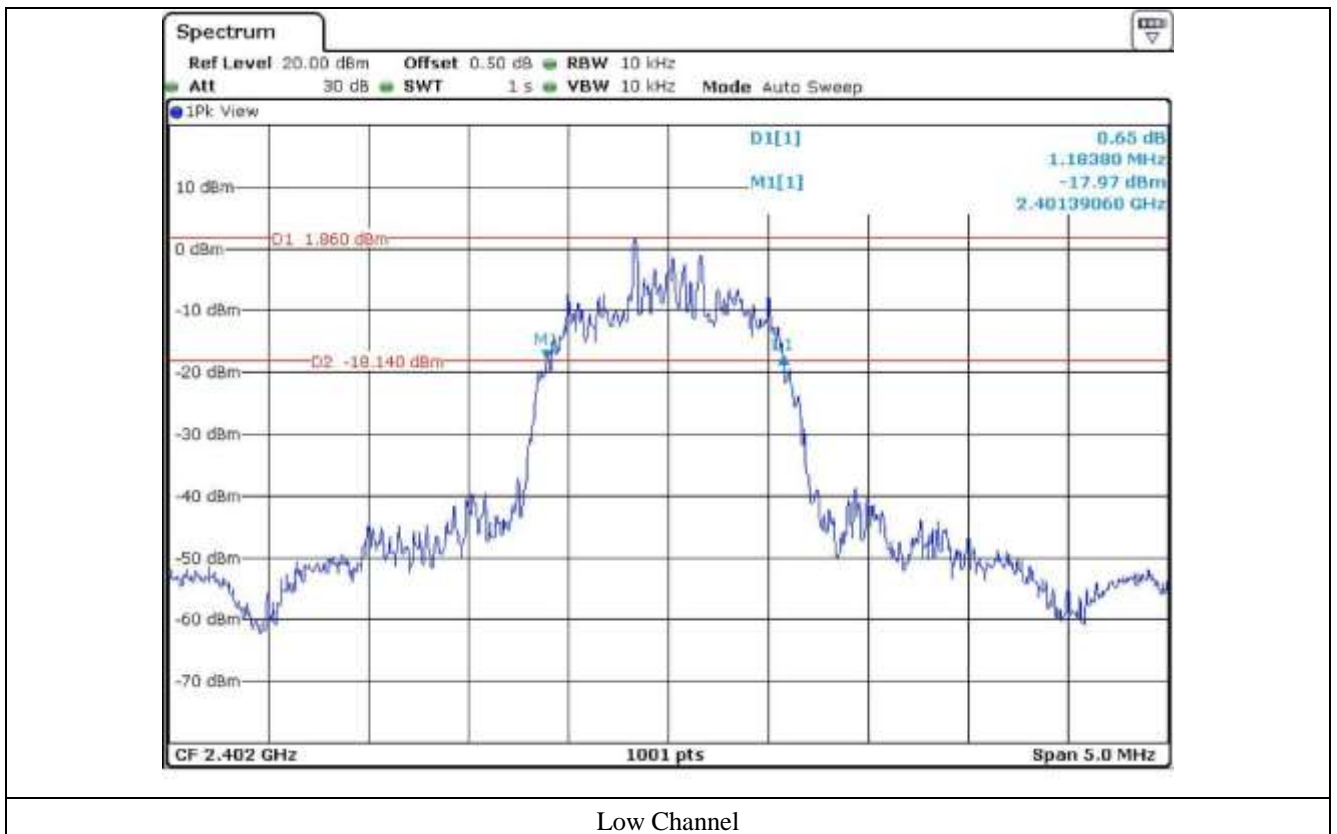

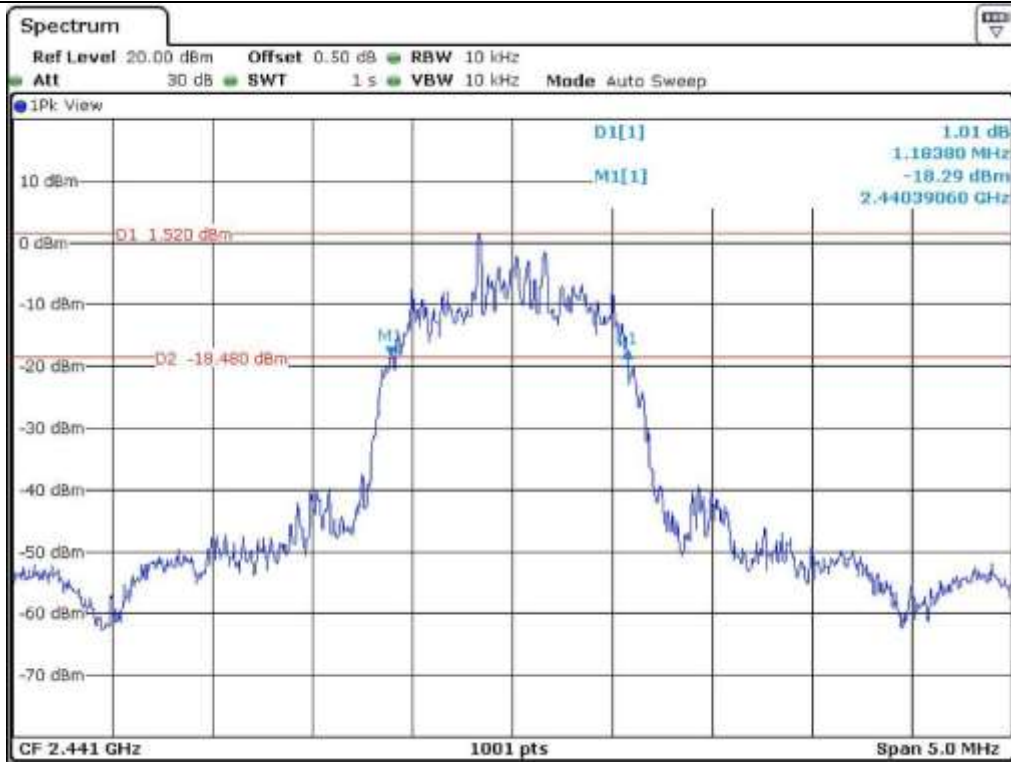

Middle Channel

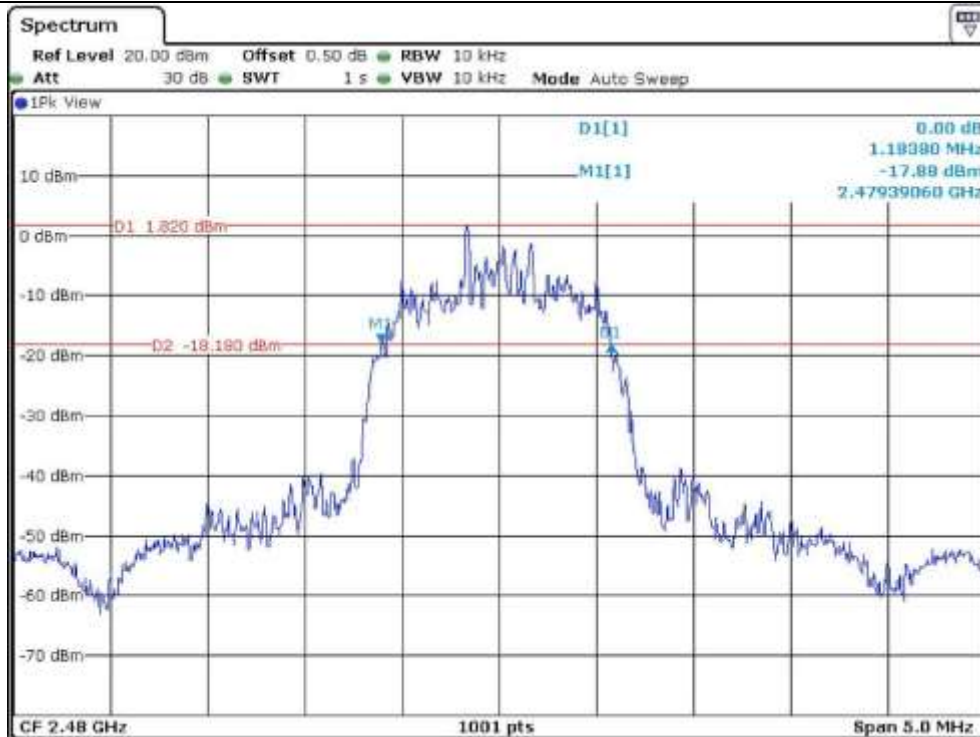

High Channel


7.6 Test data for 3 Mbps


- Test Date : September 26, 2015

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 203.80
Middle	2 441	1 203.80
High	2 480	1 203.80




Tested by: Hyung-Kwon, Oh / Engineer

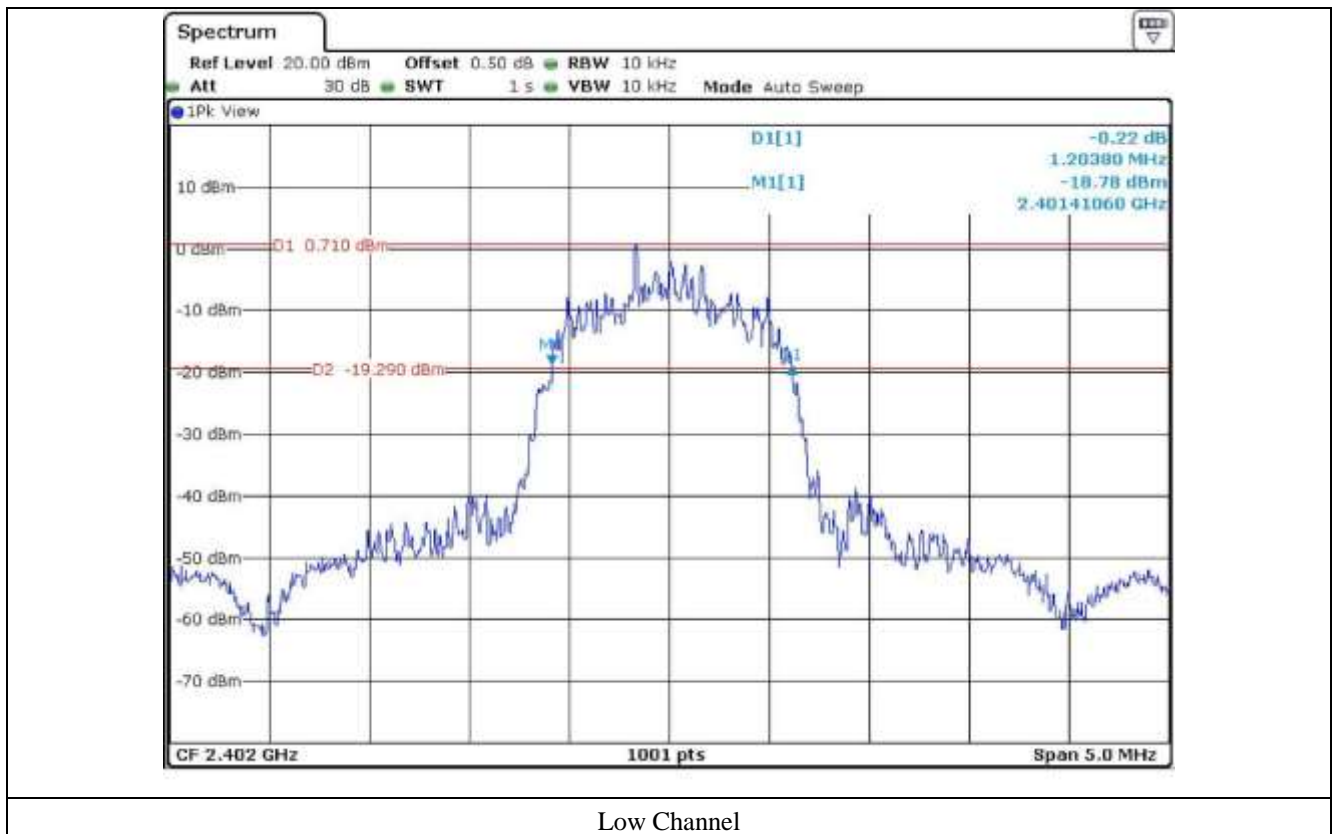

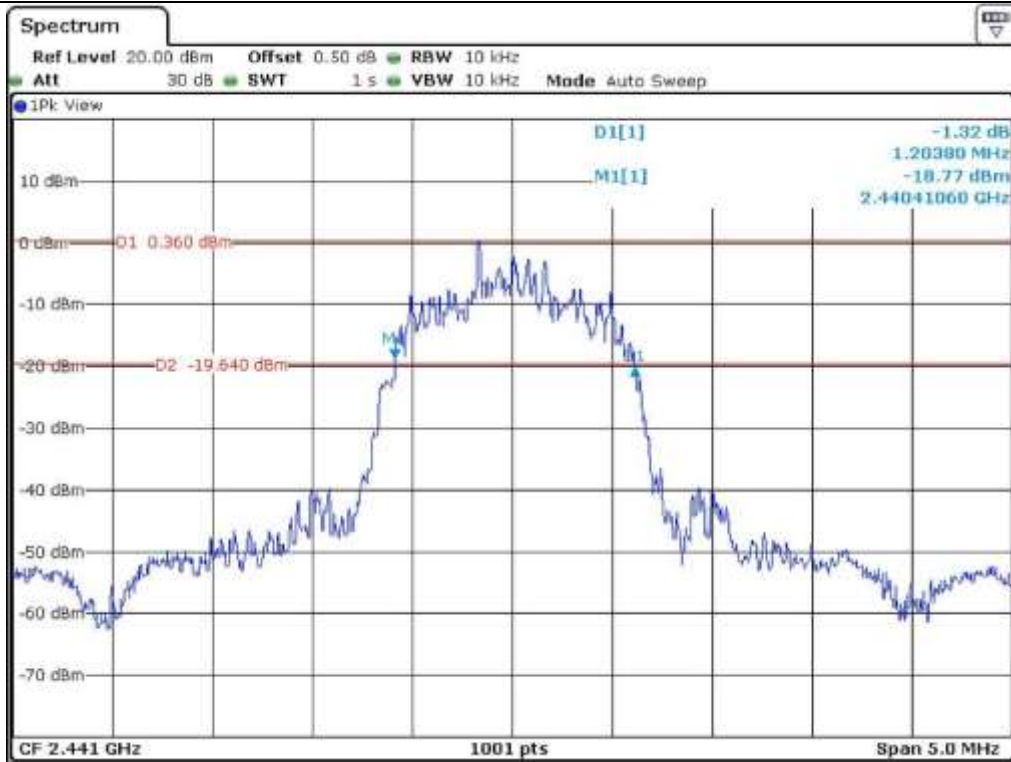

Middle Channel

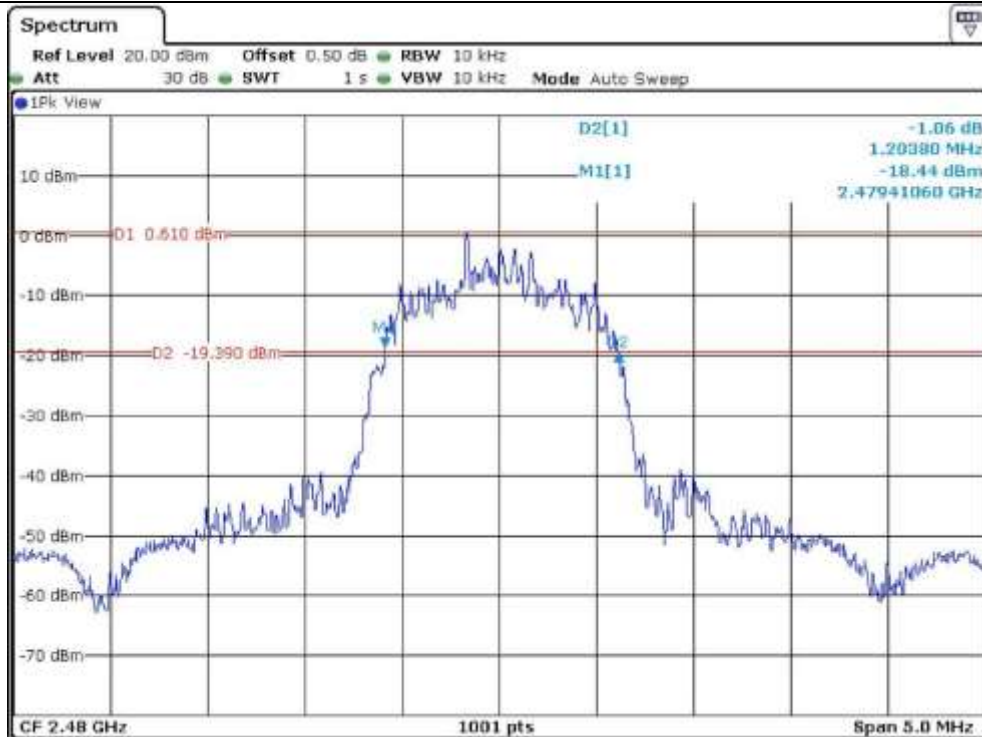

High Channel


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 21.4 °C
 Relative humidity : 45.1 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

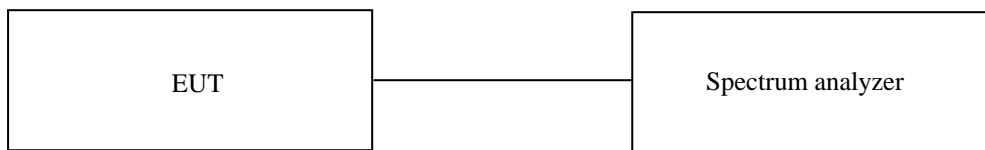

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


8.4 Test data for 1 Mbps

- Test Date : September 26, 2015

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1 009.00	576.07	Separated by a minimum of 25 kHz

Tested by: Hyung-Kwon, Oh / Engineer

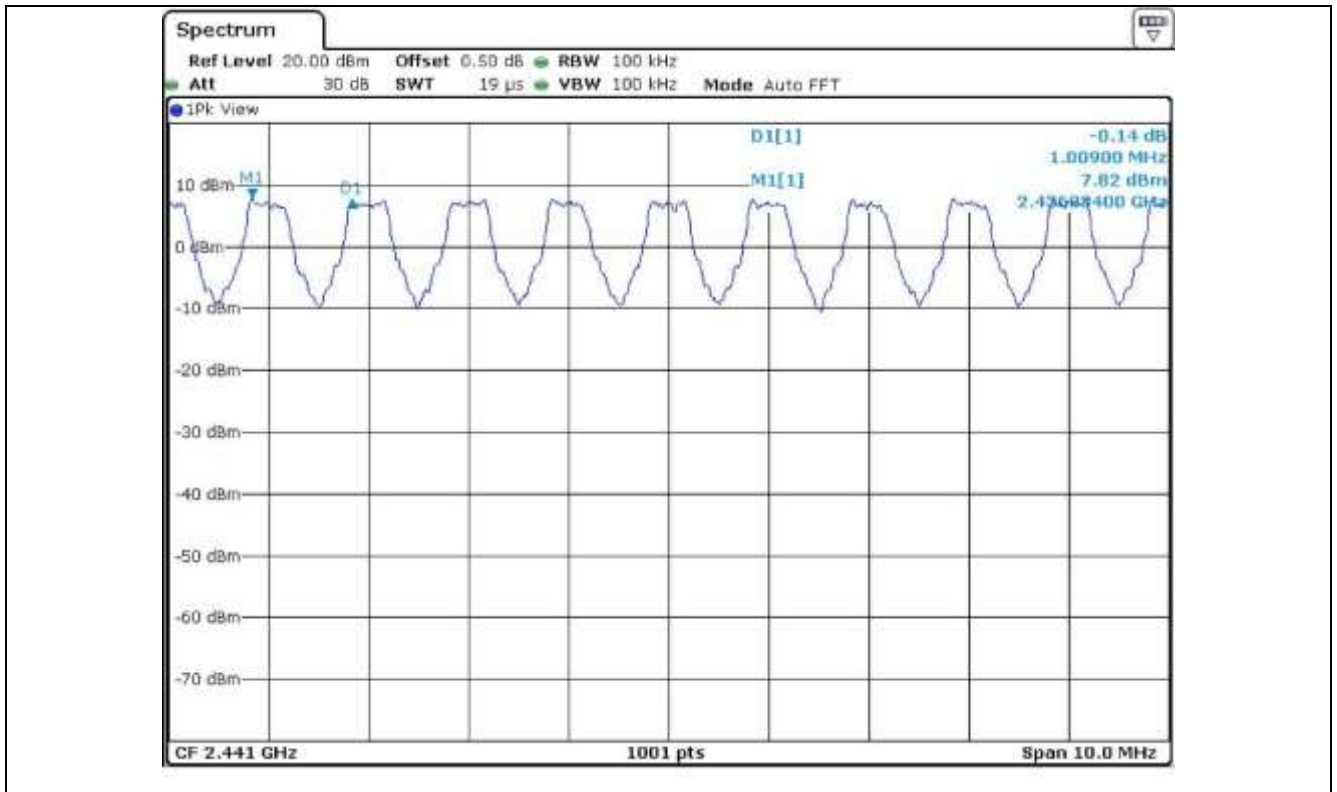


8.5 Test data for 2 Mbps

- Test Date : September 26, 2015

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1 009.00	789.20	Separated by a minimum of 25 kHz

Tested by: Hyung-Kwon, Oh / Engineer

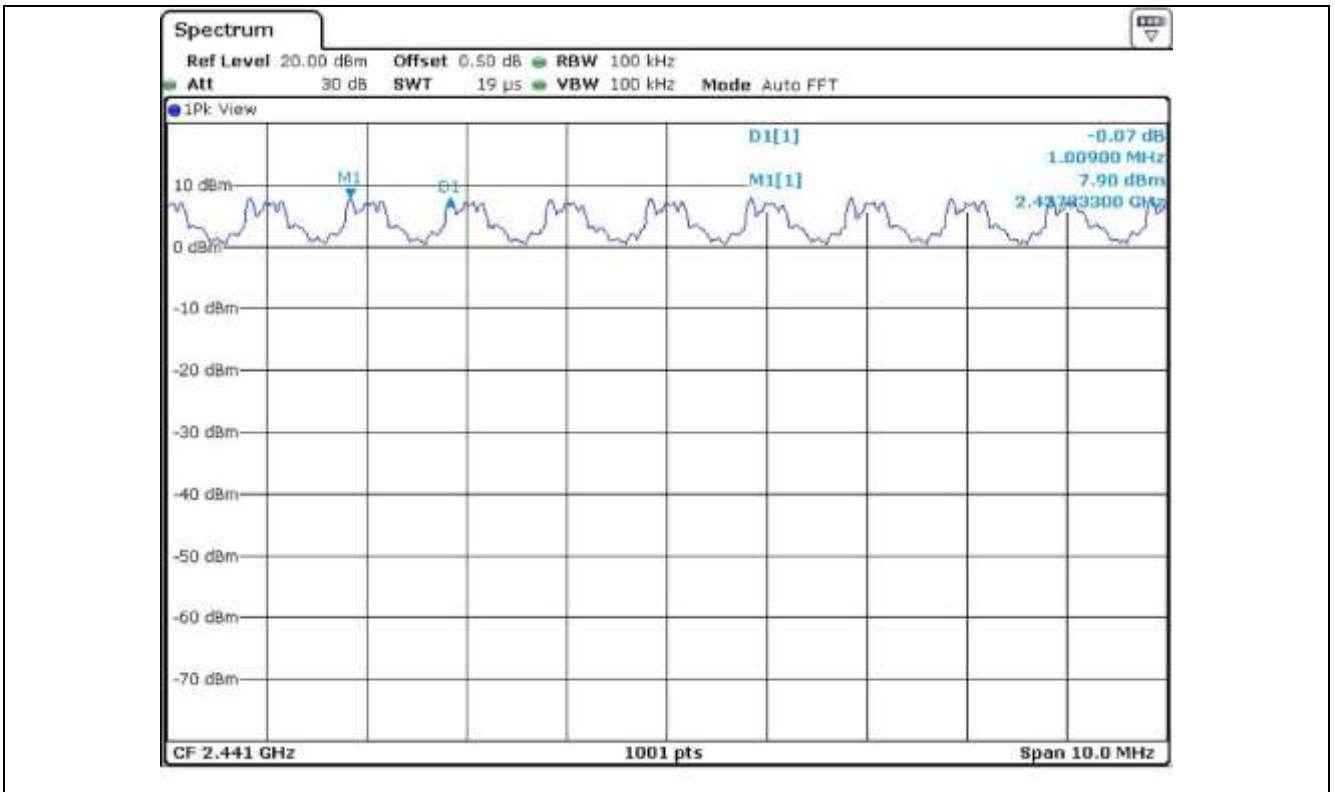


8.6 Test data for 3 Mbps

- Test Date : September 26, 2015

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1 009.00	802.53	Separated by a minimum of 25 kHz

Tested by: Hyung-Kwon, Oh / Engineer

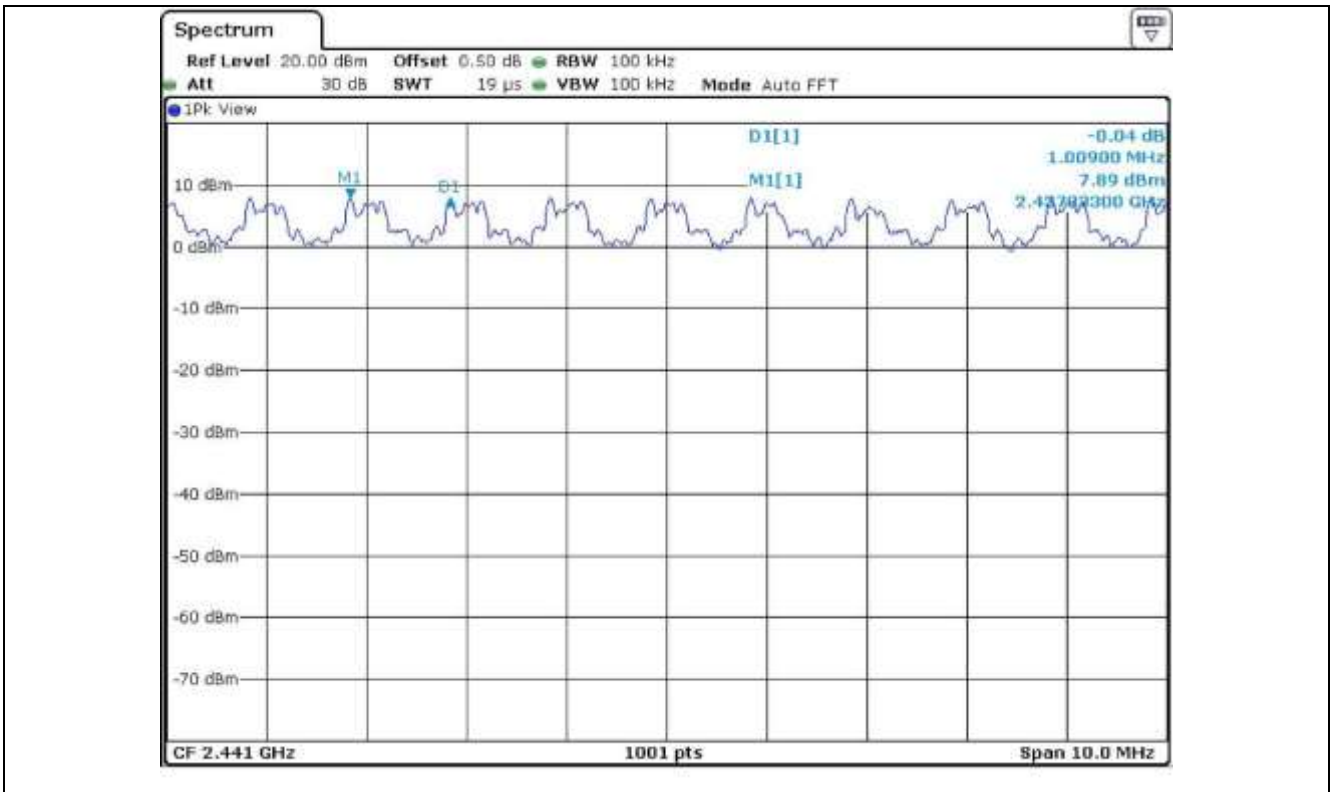


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 21.4 °C
 Relative humidity : 45.1 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 1 MHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

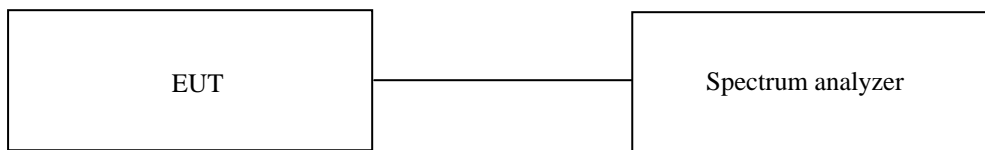

9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


9.4 Test data for 1 Mbps


- Test Date : September 26, 2015
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64




Tested by: Hyung-Kwon, Oh / Engineer

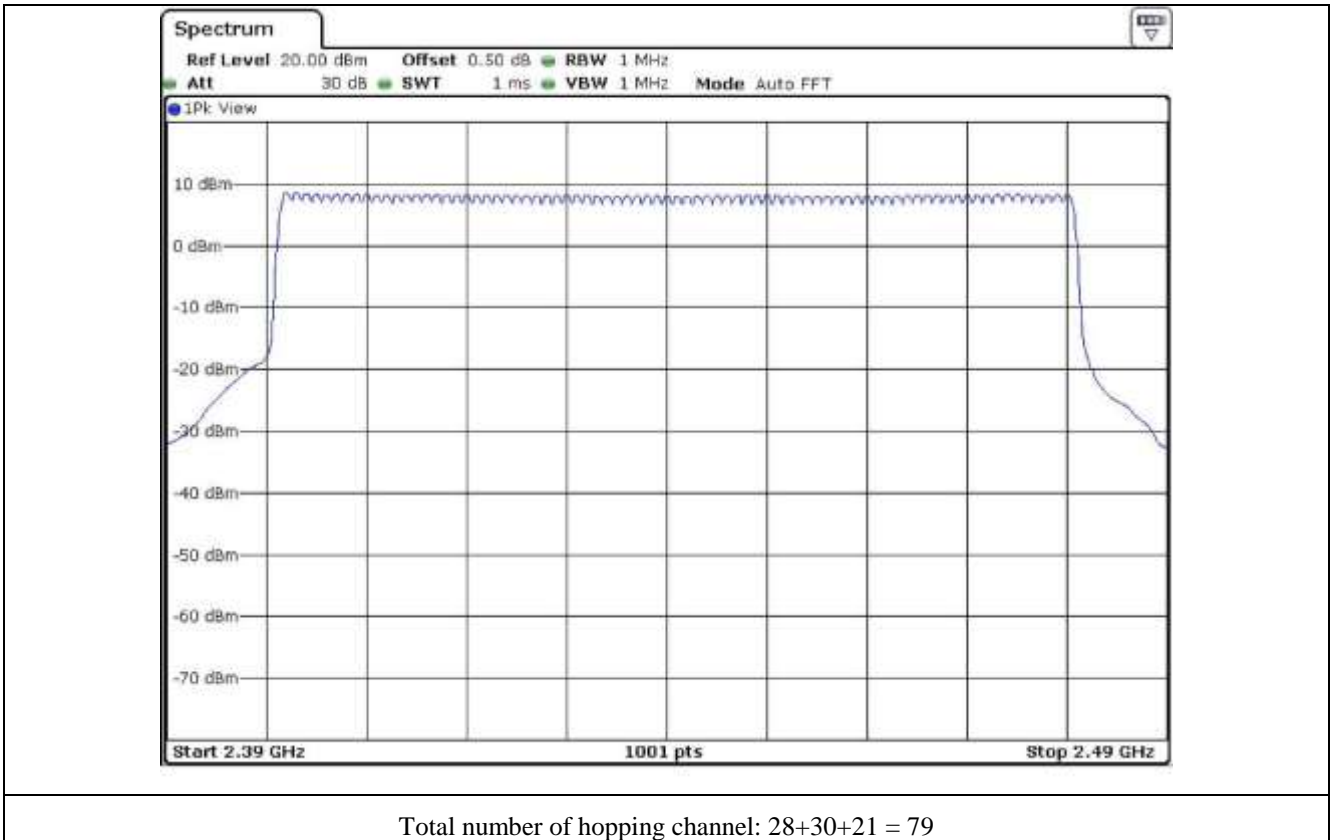


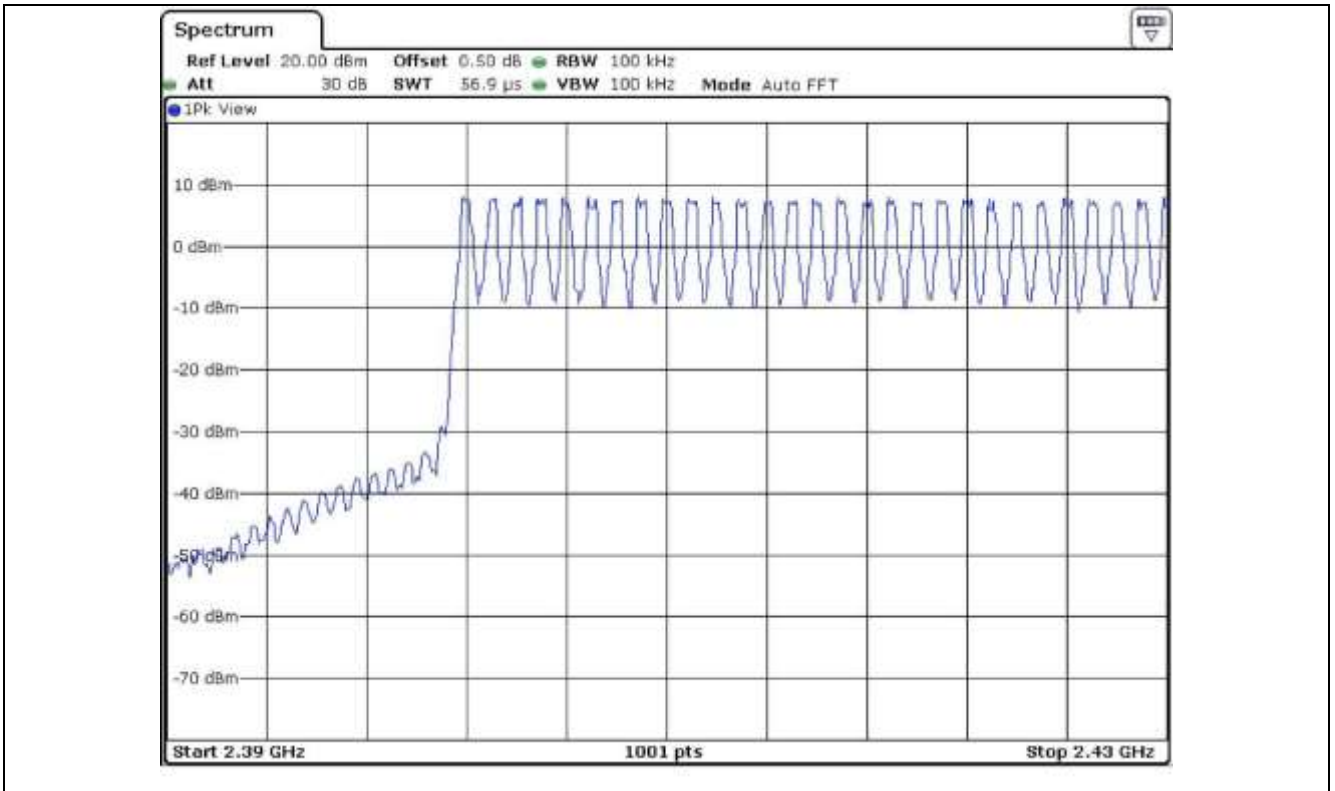

Number of hopping channel: 28

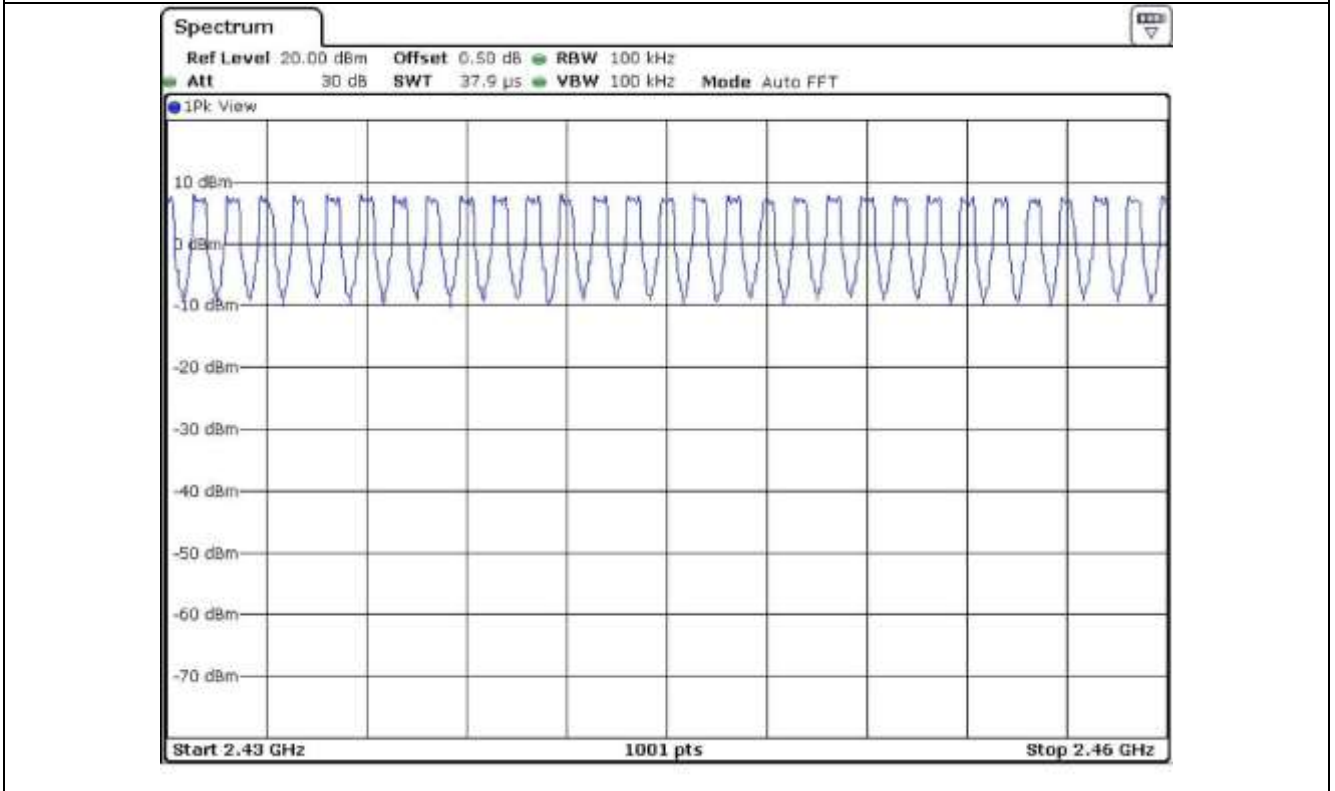

Number of hopping channel: 30

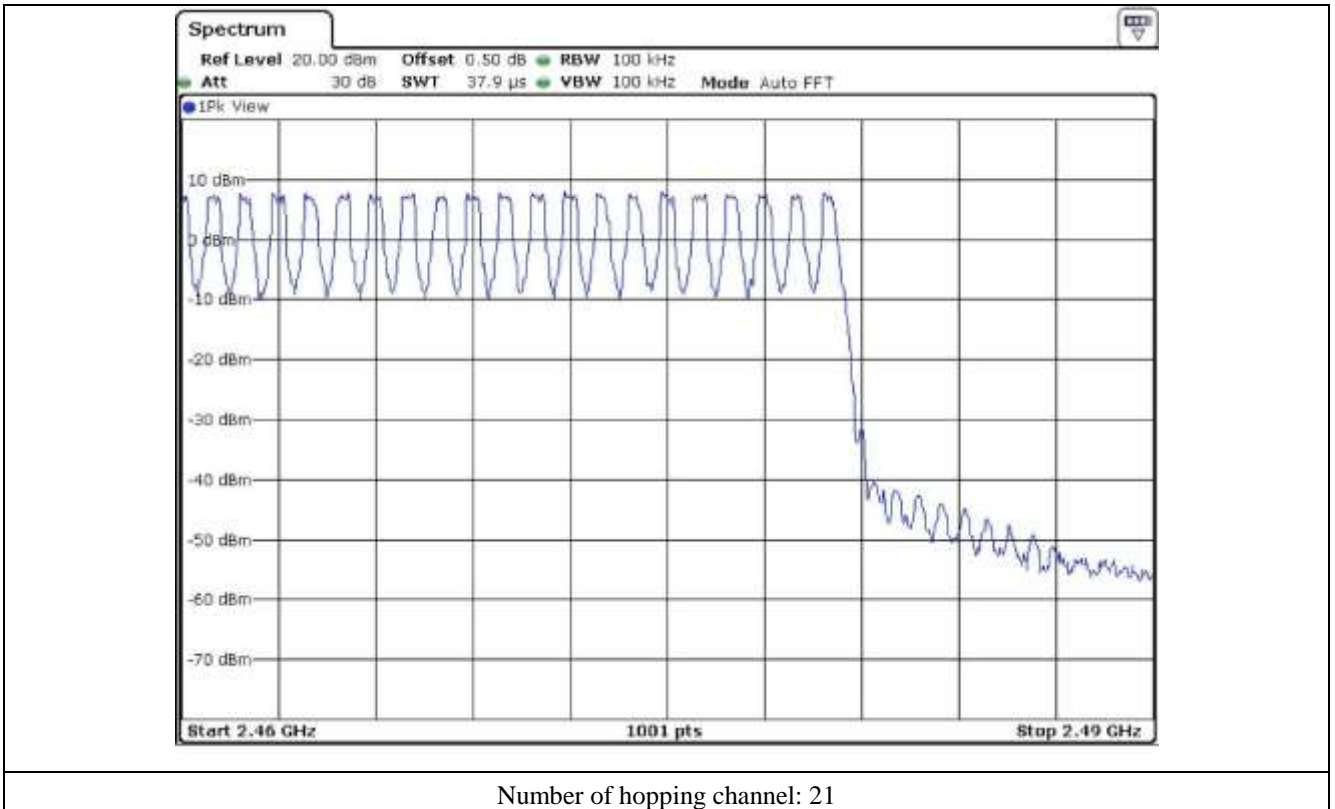


9.5 Test data for 2 Mbps


- Test Date : September 26, 2015
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64




Tested by: Hyung-Kwon, Oh / Engineer

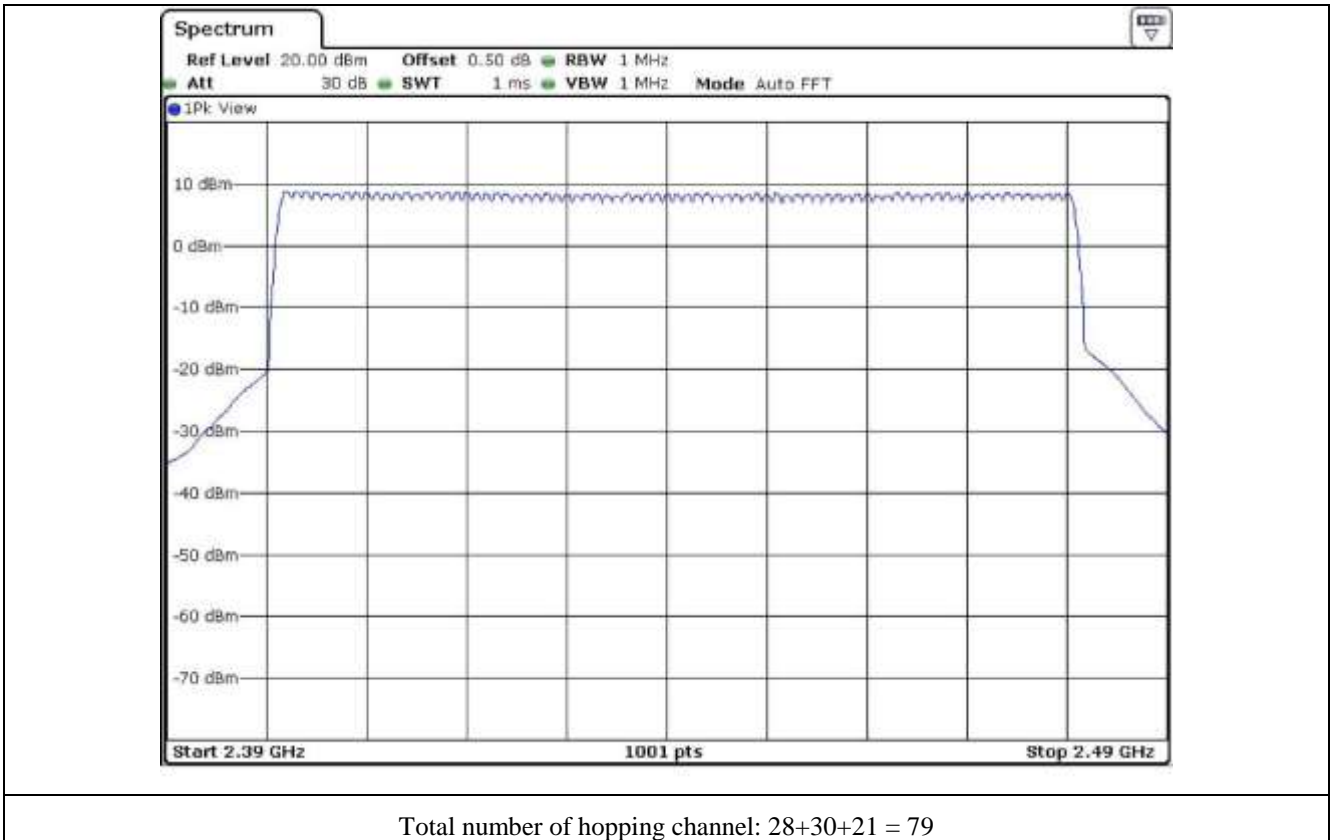


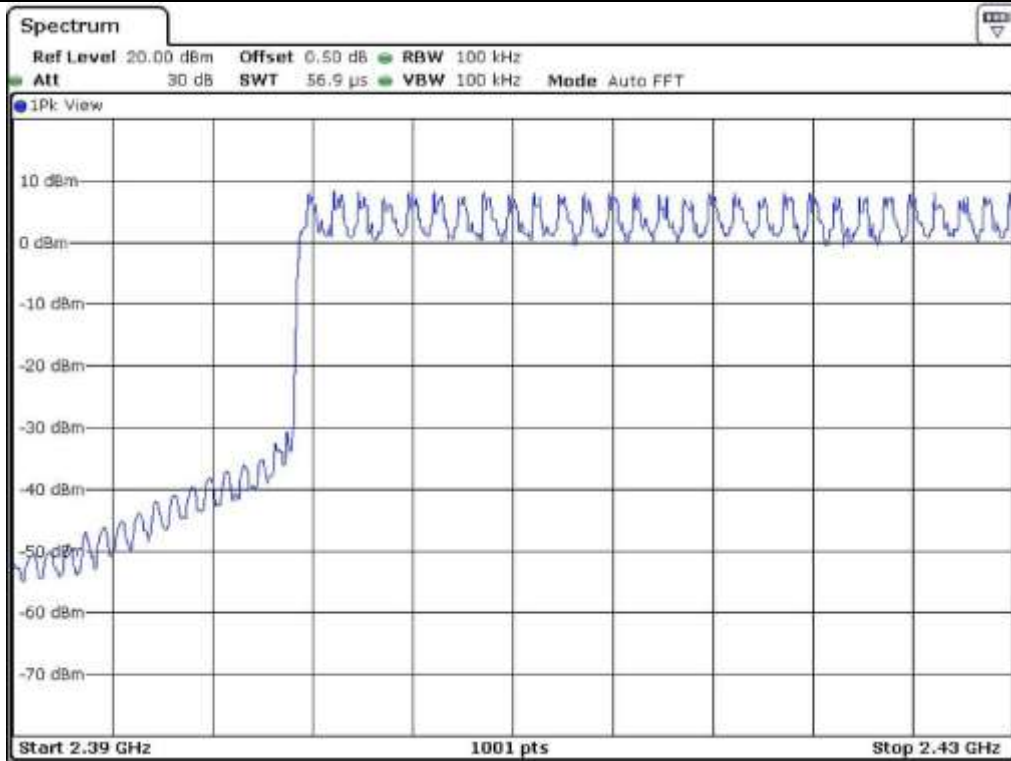

Number of hopping channel: 28

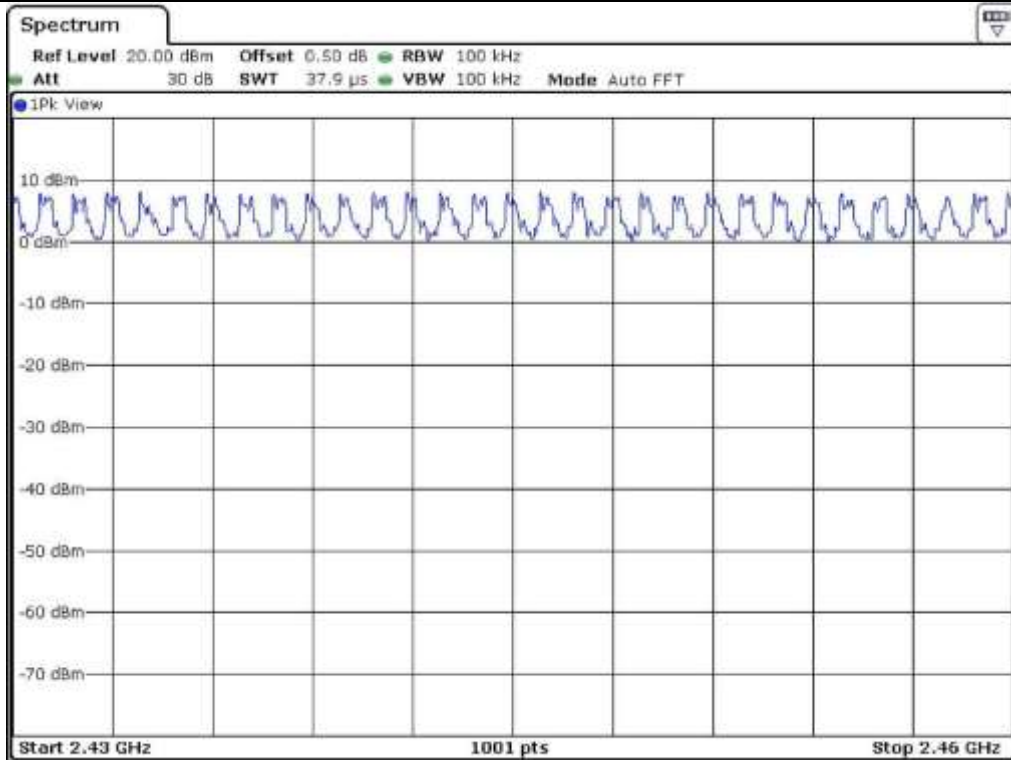

Number of hopping channel: 30

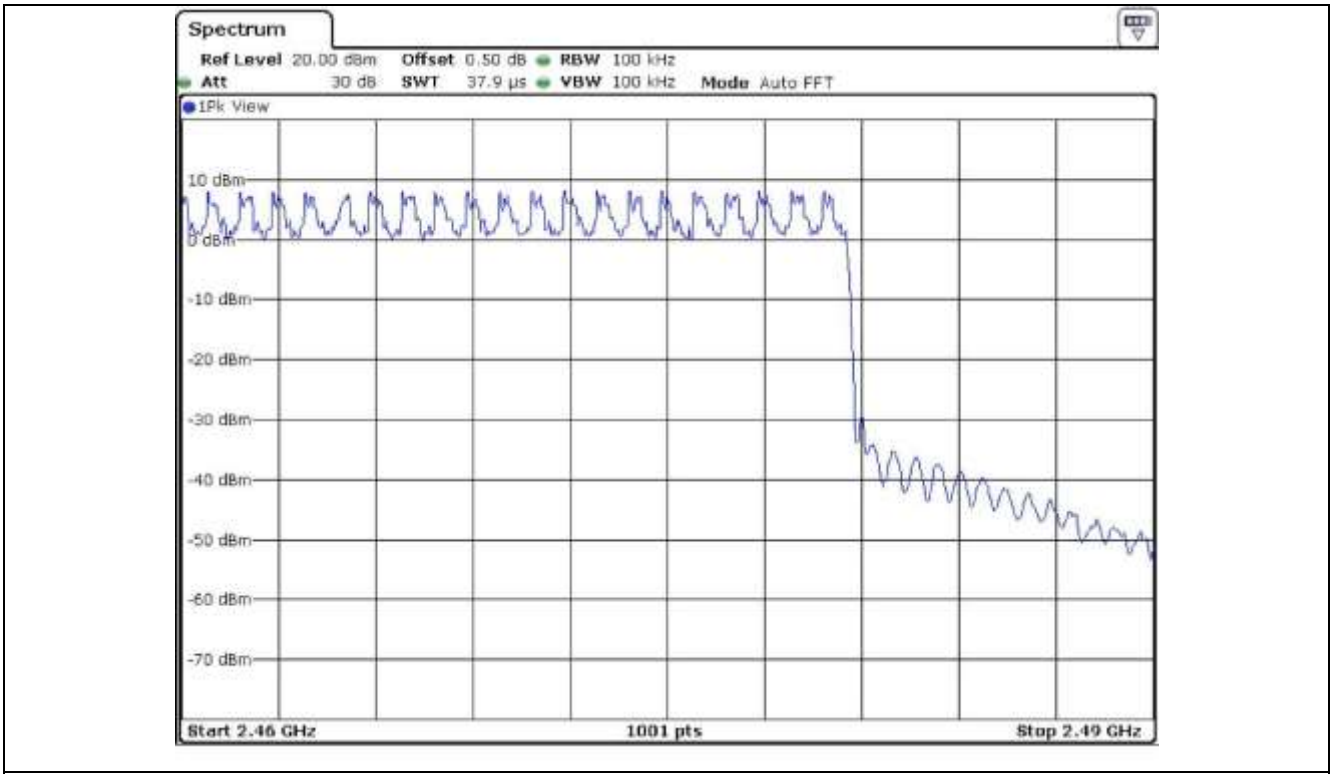

Number of hopping channel: 21


9.6 Test data for 3 Mbps


- Test Date : September 26, 2015
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64




Tested by: Hyung-Kwon, Oh / Engineer

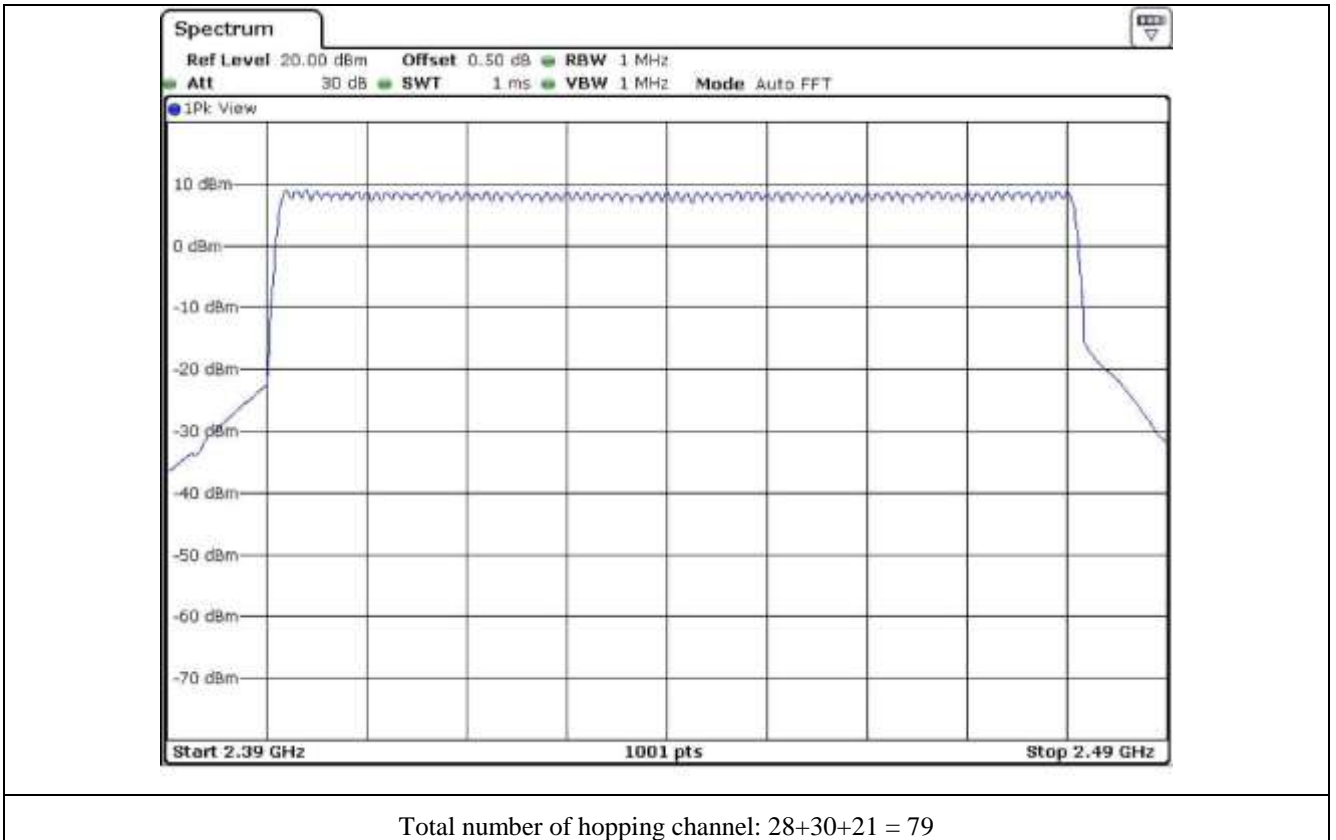


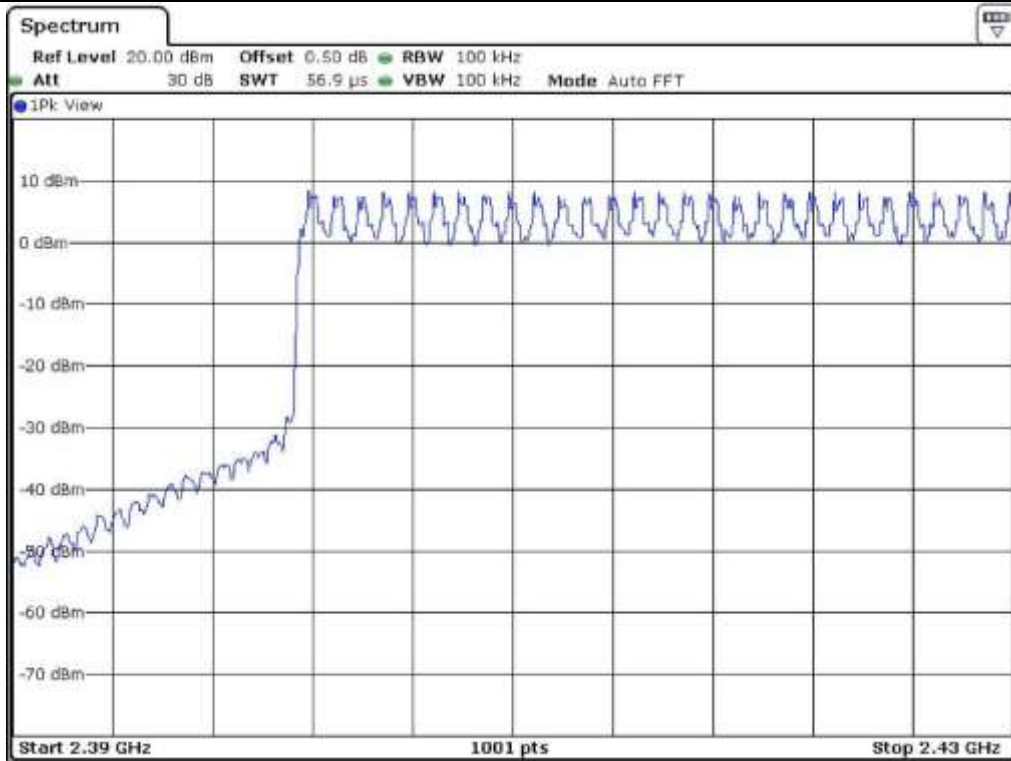

Number of hopping channel: 28

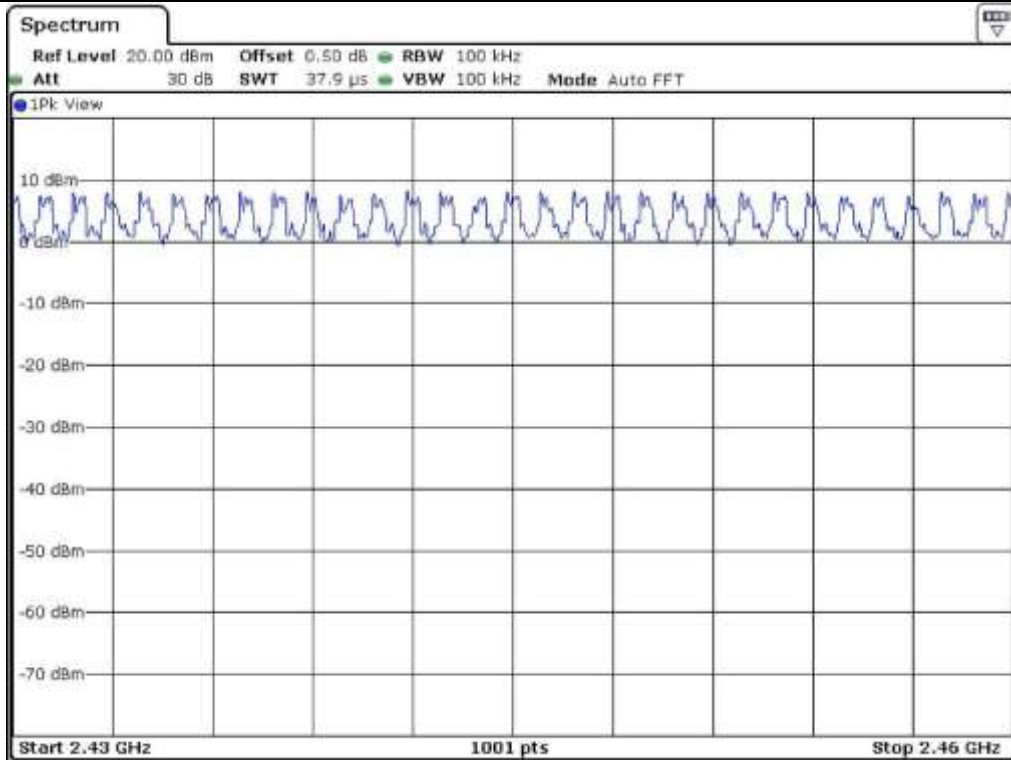

Number of hopping channel: 30

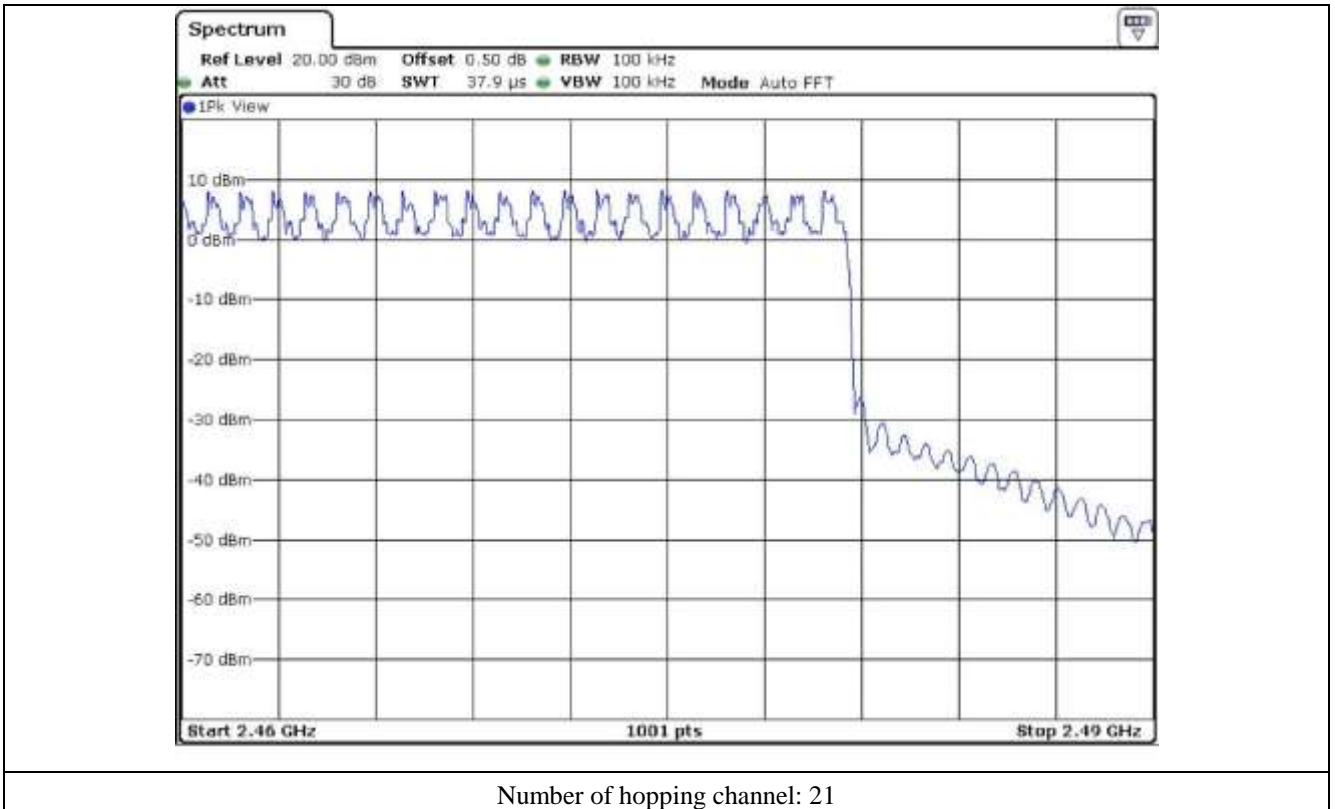


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 21.4 °C
 Relative humidity : 45.1 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

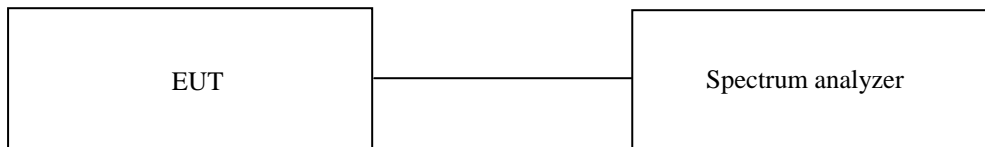

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data for 1 Mbps

- Test Date : September 26, 2015

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.370	10.13	31.6	118.44	400	PASS
DH3	1.620	5.06	31.6	259.03	400	
DH5	2.870	3.38	31.6	306.54	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Hyung-Kwon, Oh / Engineer

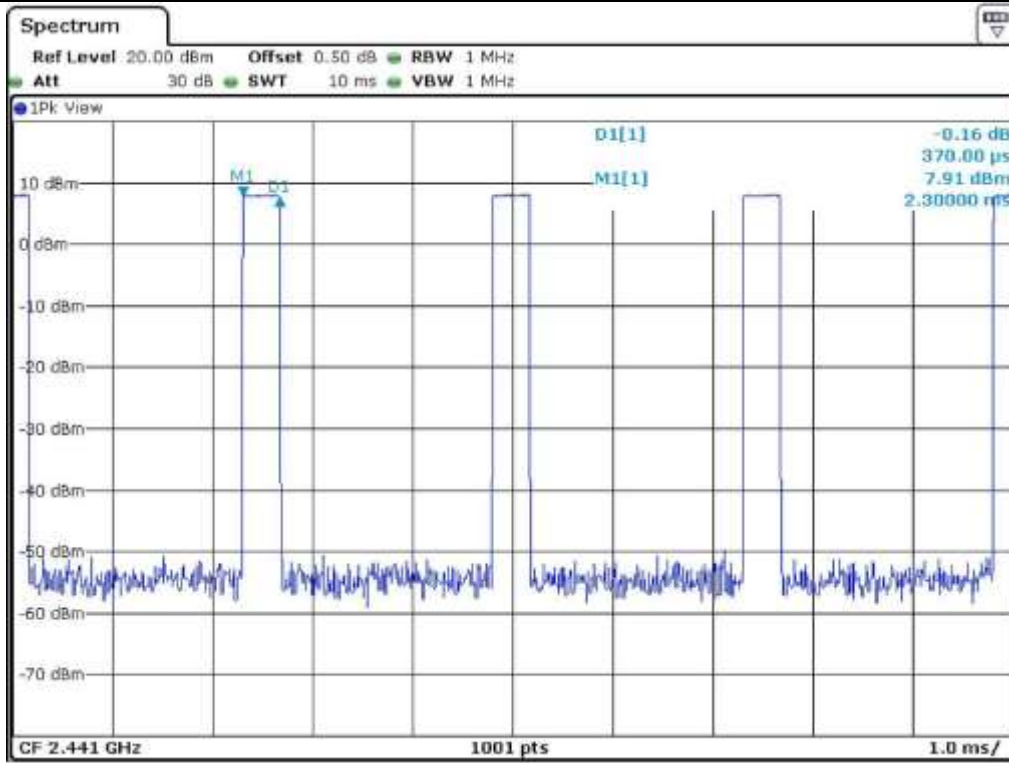

DH1

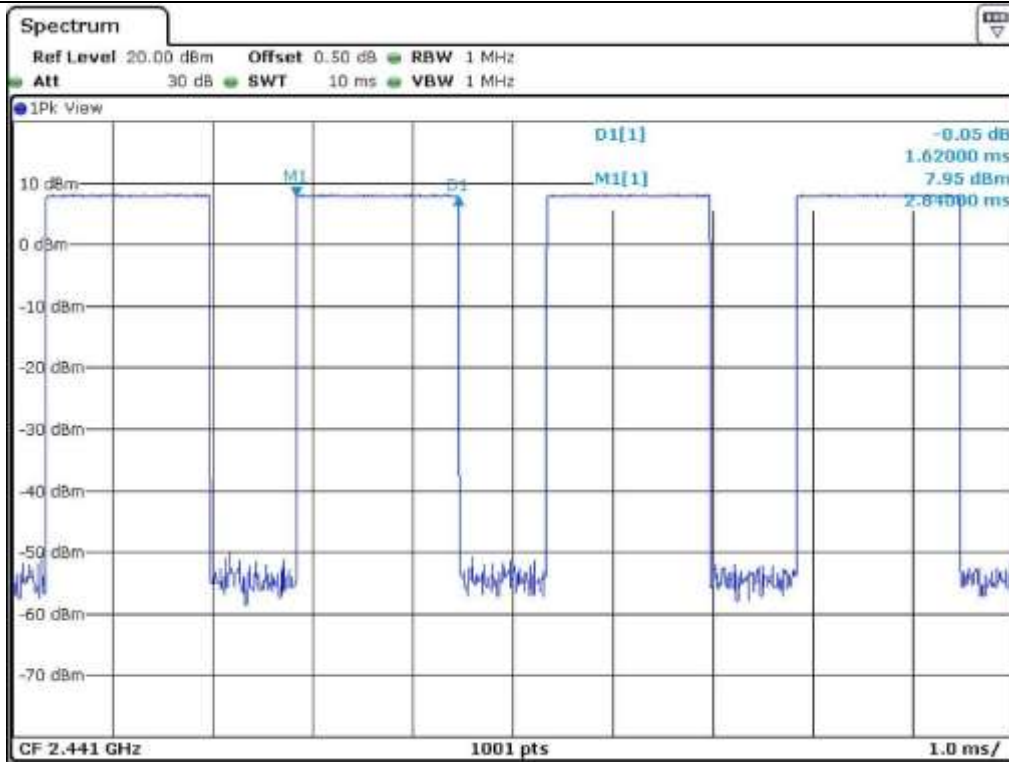

DH3

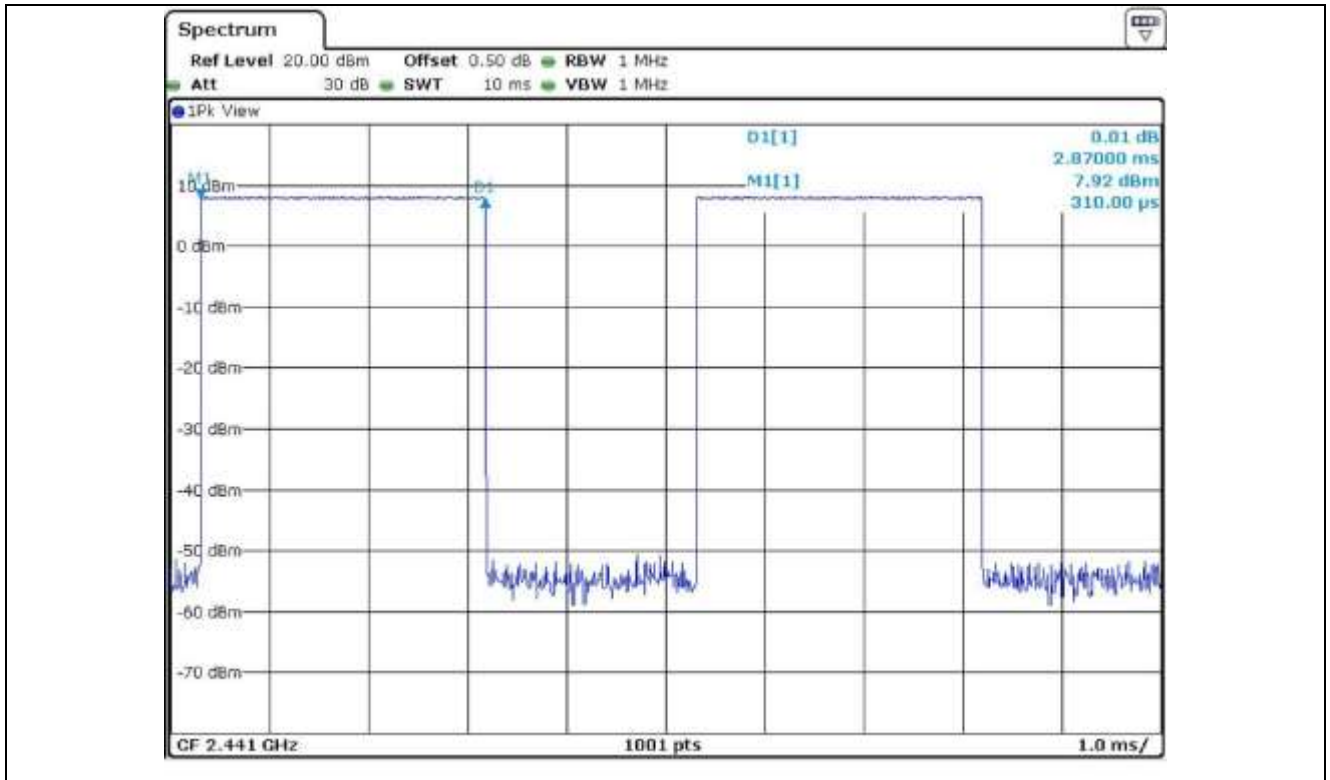

DH5

10.5 Test data for 2 Mbps

- Test Date : September 26, 2015

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.380	10.13	31.6	121.64	400	PASS
DH3	1.630	5.06	31.6	260.63	400	
DH5	2.880	3.38	31.6	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Hyung-Kwon, Oh / Engineer

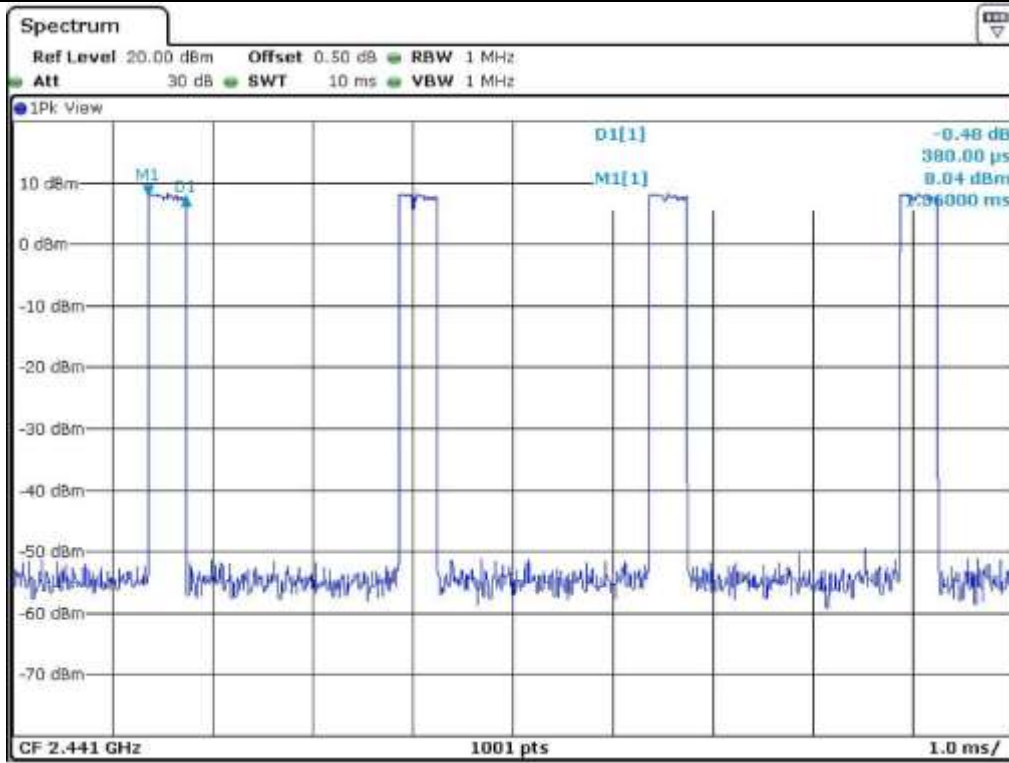

DH1

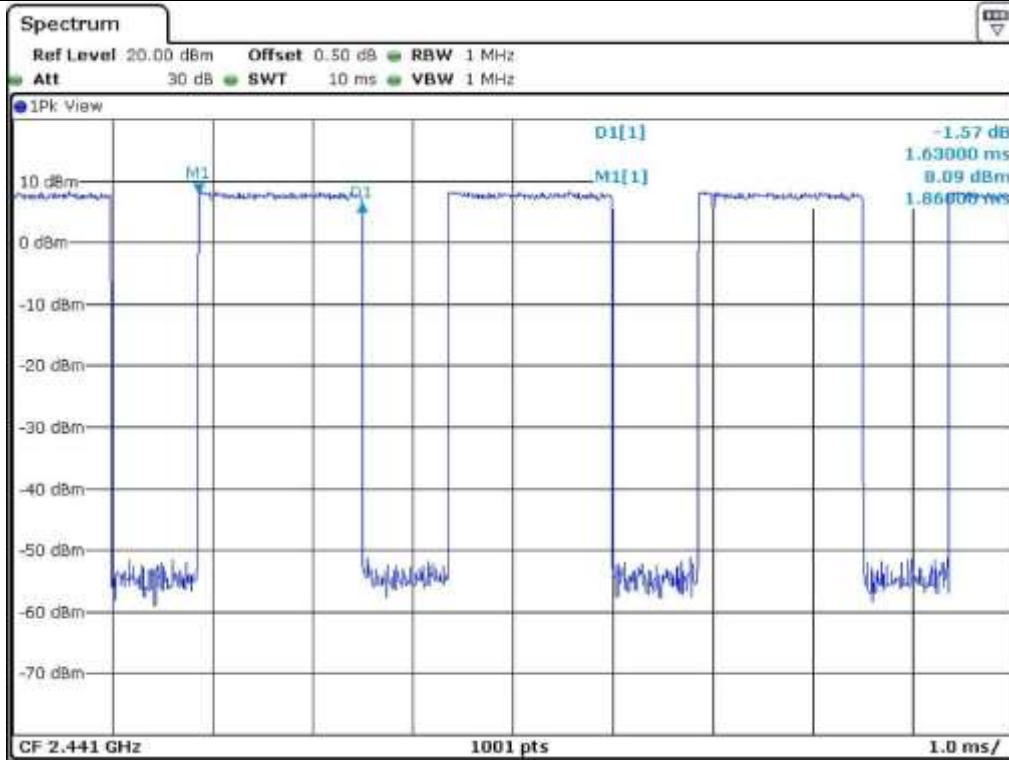

DH3

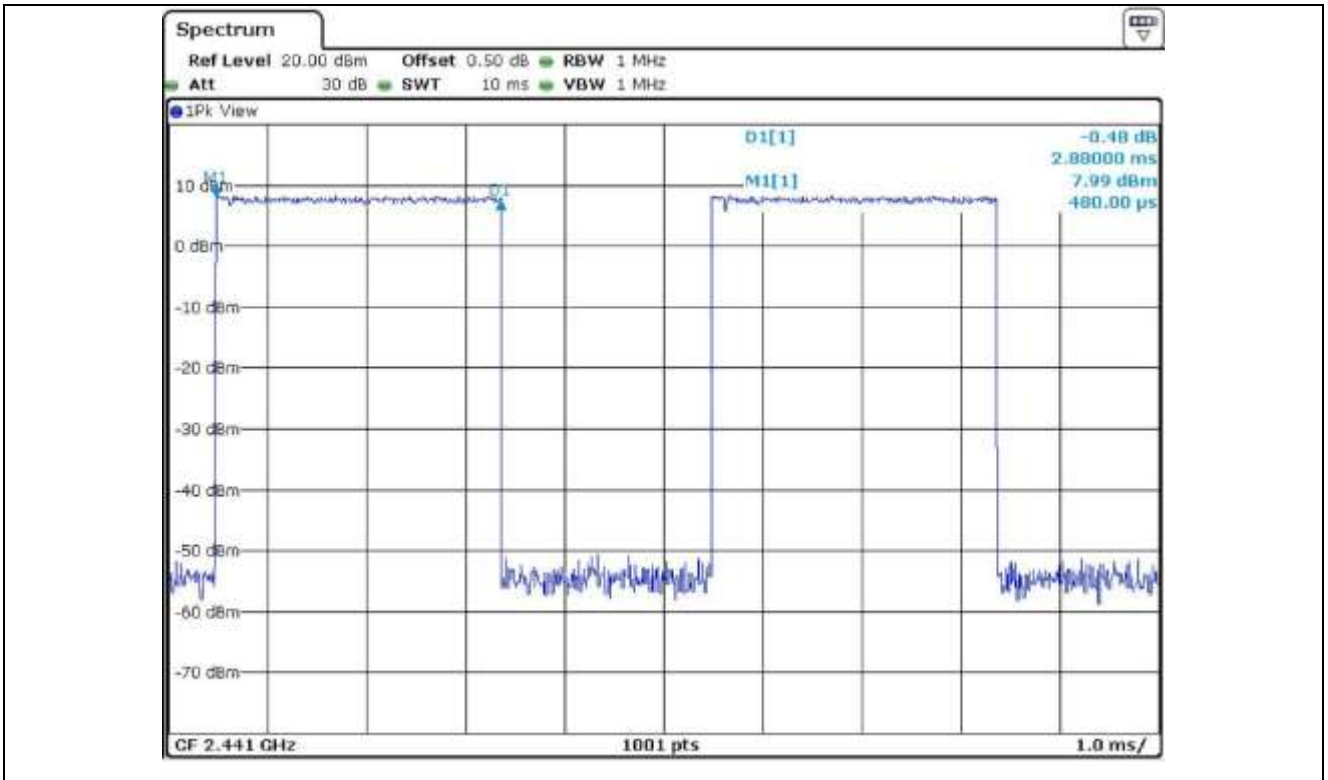

DH5

10.6 Test data for 3 Mbps

-. Test Date : September 26, 2015

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.370	10.13	31.6	118.44	400	PASS
DH3	1.630	5.06	31.6	260.63	400	
DH5	2.880	3.38	31.6	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Hyung-Kwon, Oh / Engineer

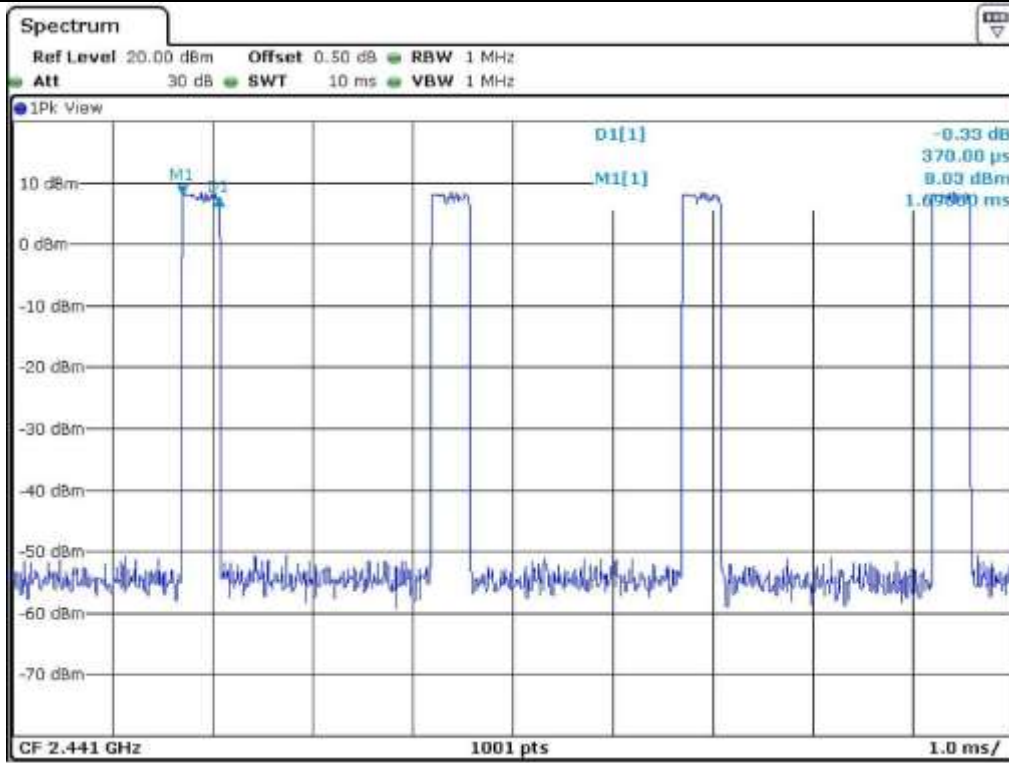

DH1

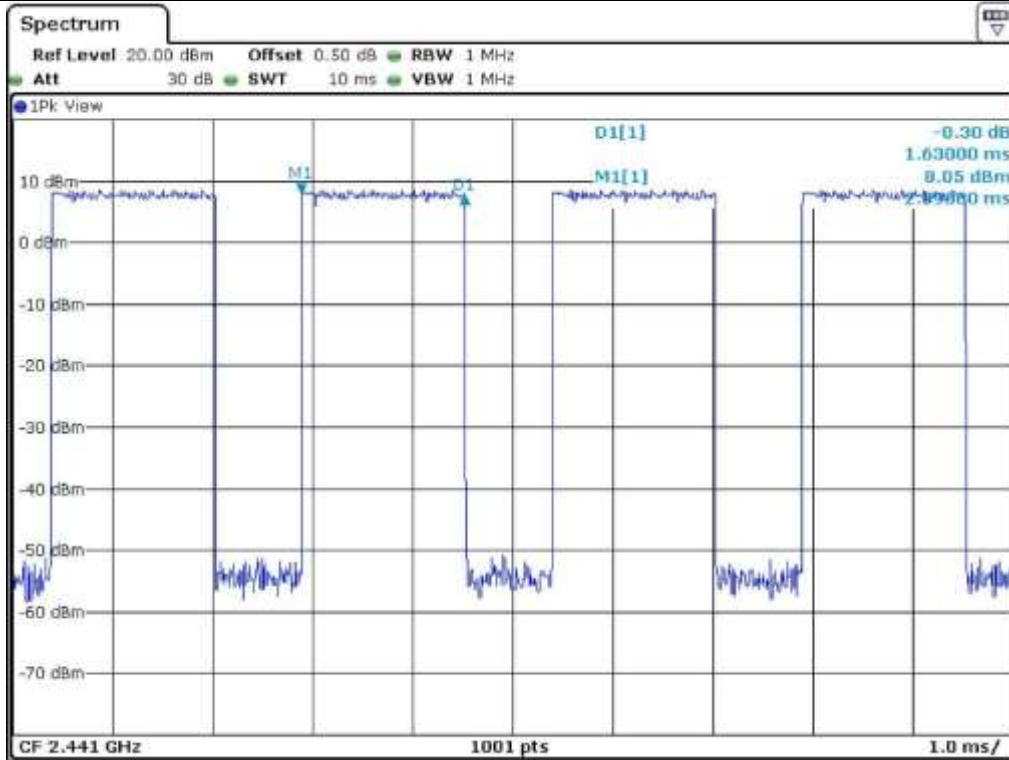

DH3

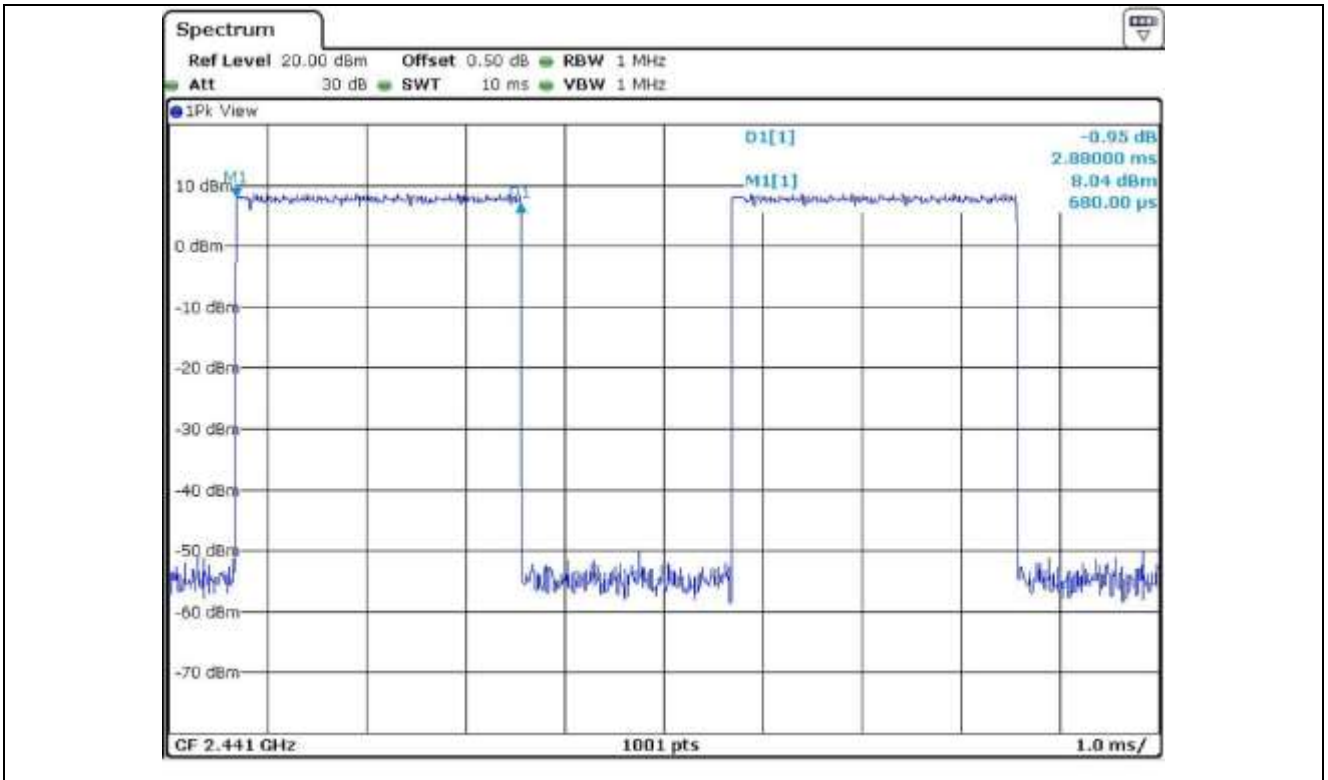

DH5


11. MAXIMUM PEAK OUTPUT POWER

11.1 Operating environment

Temperature : 21.4 °C
 Relative humidity : 45.1 % R.H

11.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency.

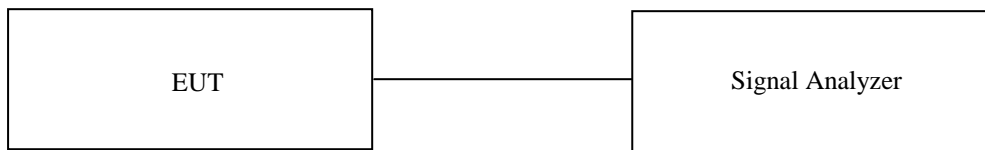

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for 1 Mbps


- Test Date : September 26, 2015


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	8.57	21.00	12.43
MIDDLE	2 441	8.22	21.00	12.78
HIGH	2 480	8.44	21.00	12.56


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Hyung-Kwon, Oh / Engineer

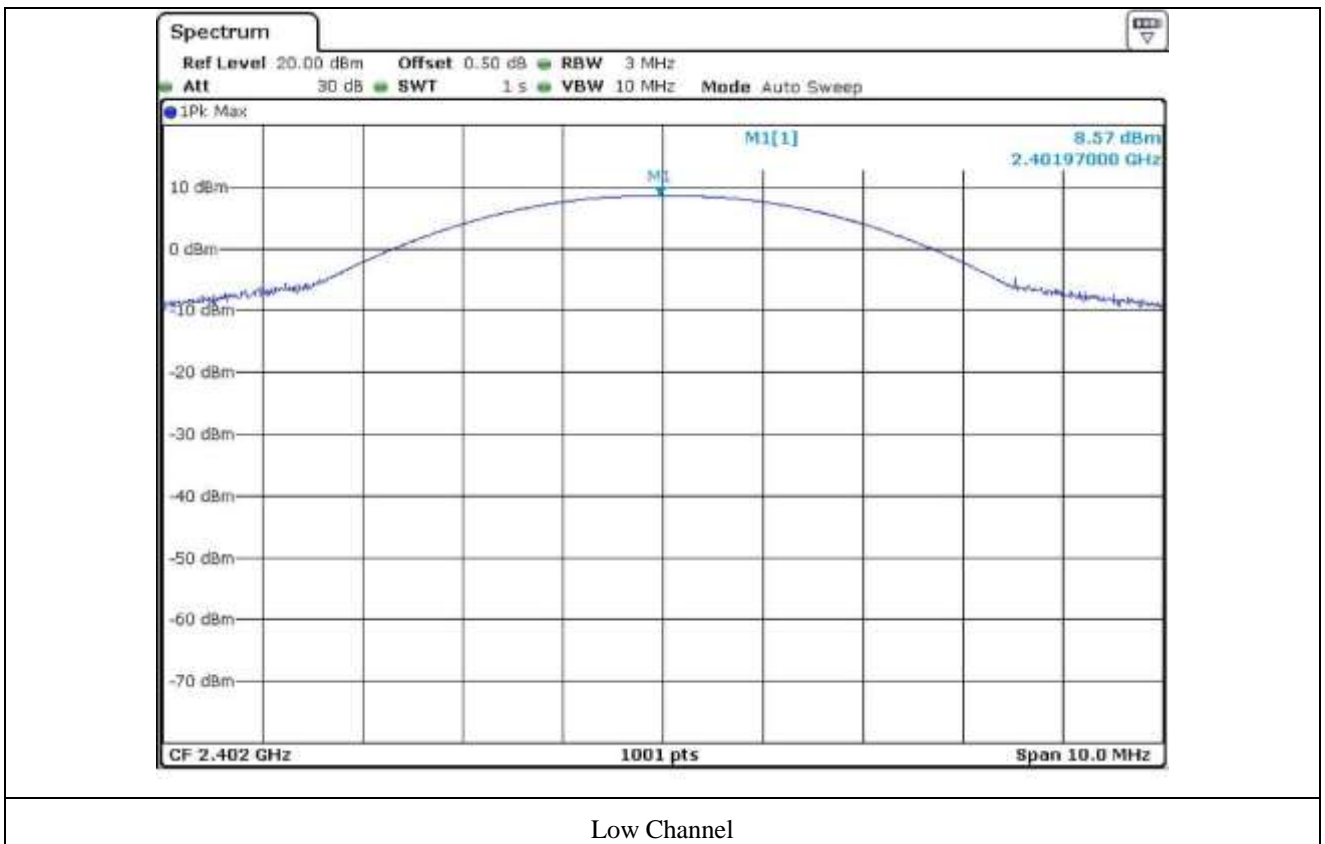

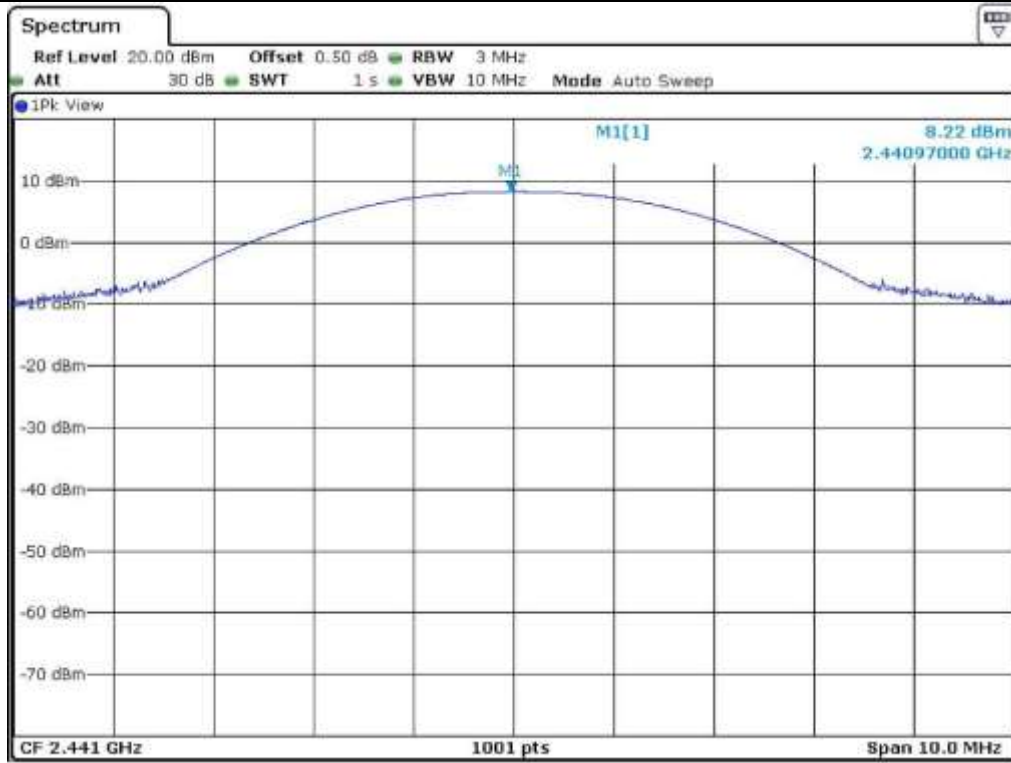

Middle Channel

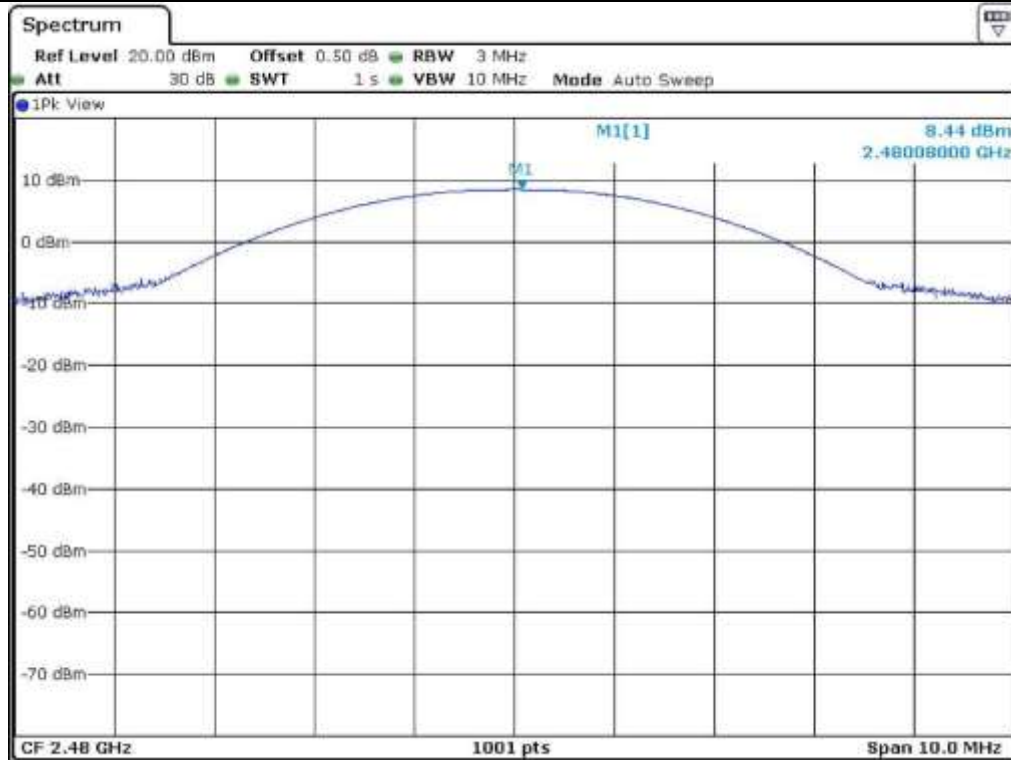

High Channel

11.5 Test data for 2 Mbps


-. Test Date : September 26, 2015

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	9.38	21.00	11.62
MIDDLE	2 441	9.10	21.00	11.90
HIGH	2 480	9.29	21.00	11.71

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Hyung-Kwon, Oh / Engineer

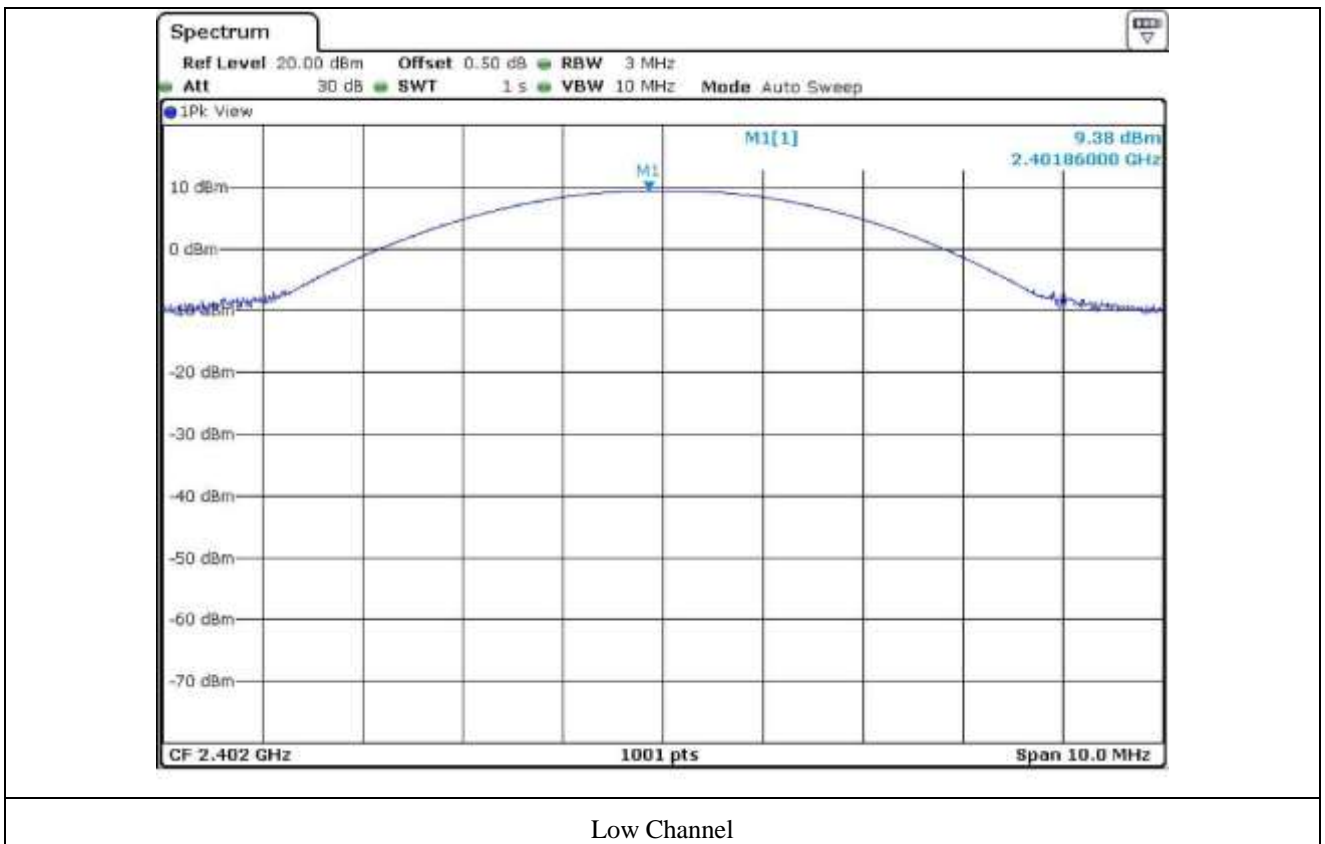

Low Channel

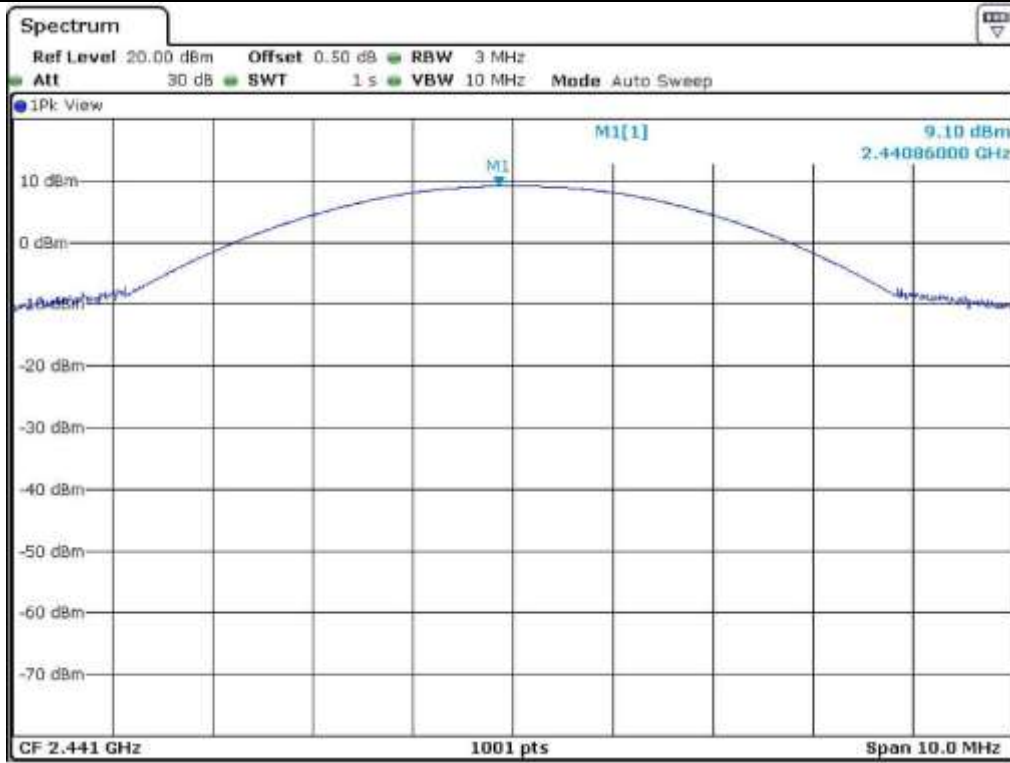

Middle Channel



High Channel

11.6 Test data for 3 Mbps


-. Test Date : September 26, 2015

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	9.48	21.00	11.52
MIDDLE	2 441	9.24	21.00	11.76
HIGH	2 480	9.41	21.00	11.59


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Hyung-Kwon, Oh / Engineer

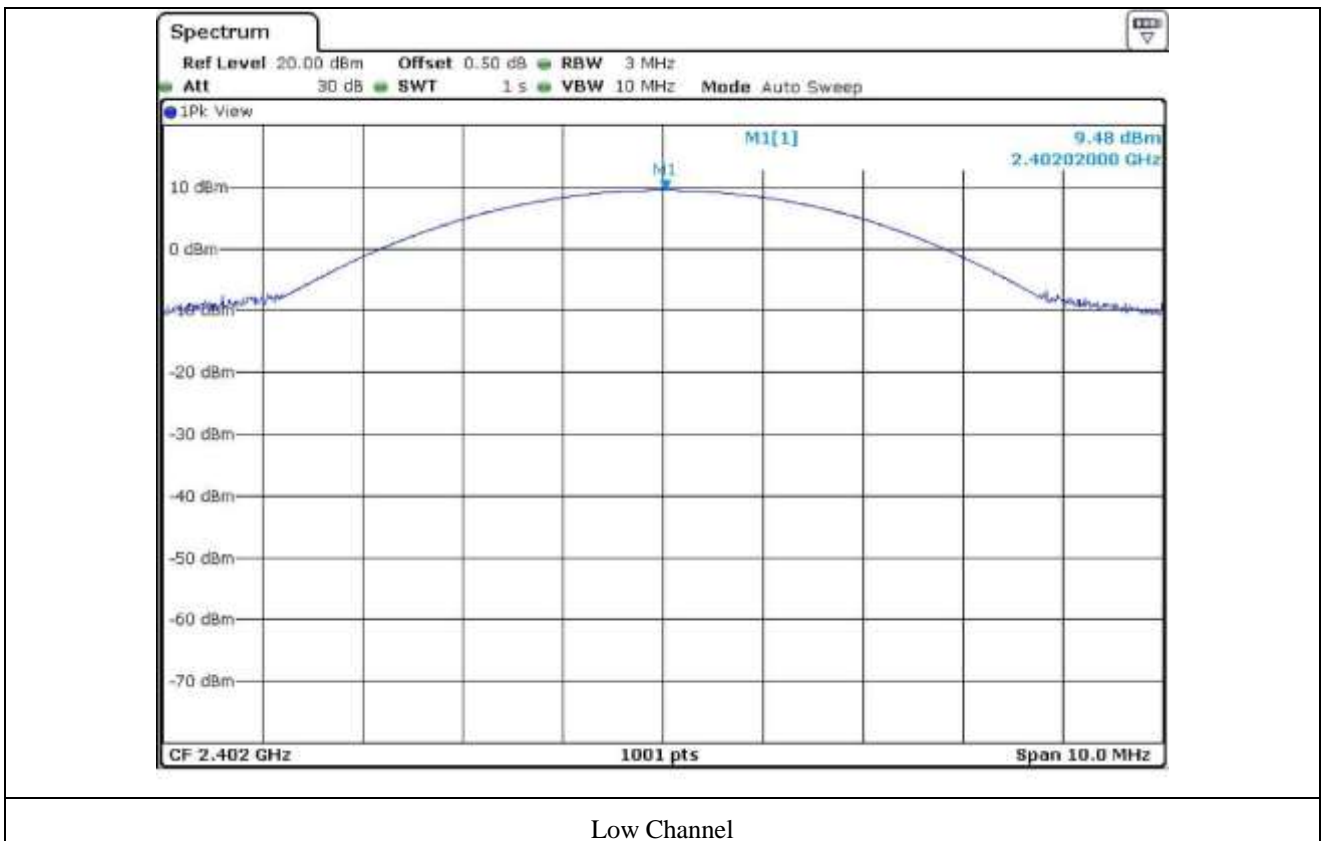



Middle Channel

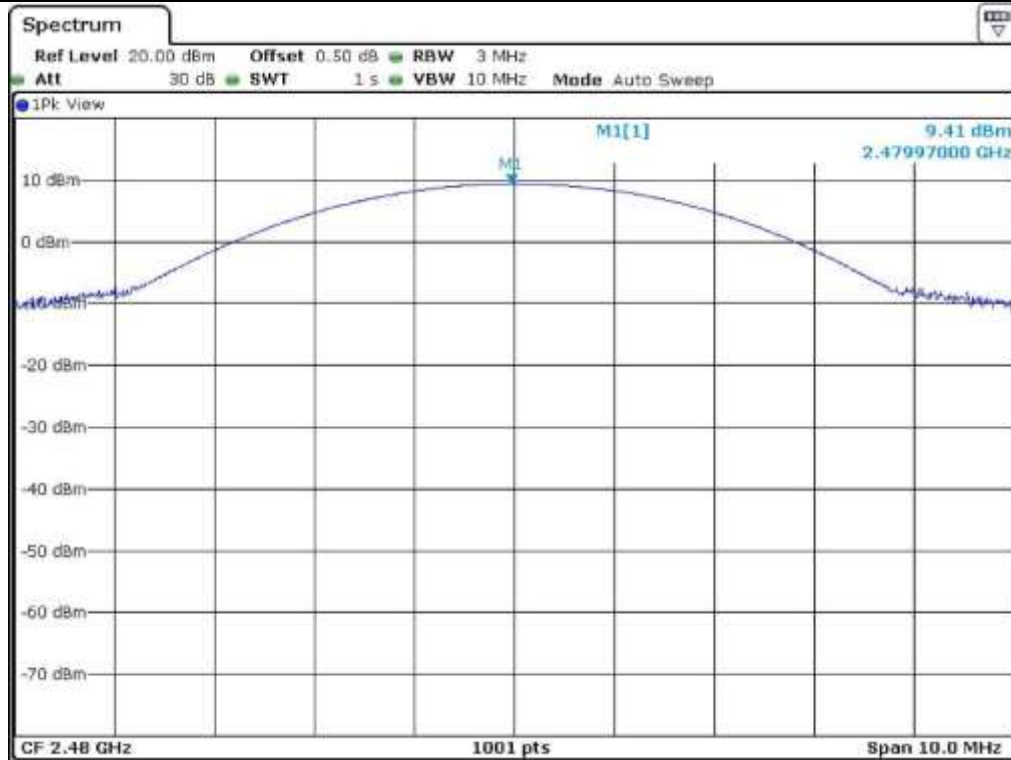

High Channel


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 21.4 °C
 Relative humidity : 45.1 % R.H

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

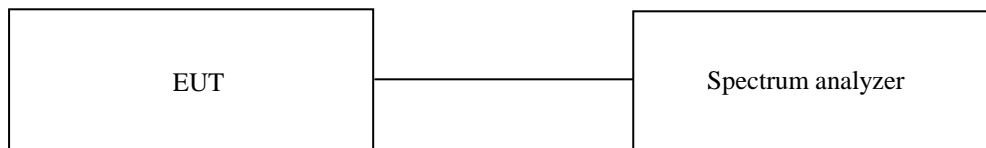

12.3 Test set-up for radiated measurement

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 kHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 ms in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


12.4 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 29, 2015 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 29, 2015 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	10041	Nov. 25, 2014 (1Y)
■ - DT3000	Innco System	Turn Table	930611	N/A
■ - MA4000-EP	Innco System	Antenna Master	3320611	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Jul. 10, 2014 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Apr. 30, 2015 (2Y)


All test equipment used is calibrated on a regular basis.

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

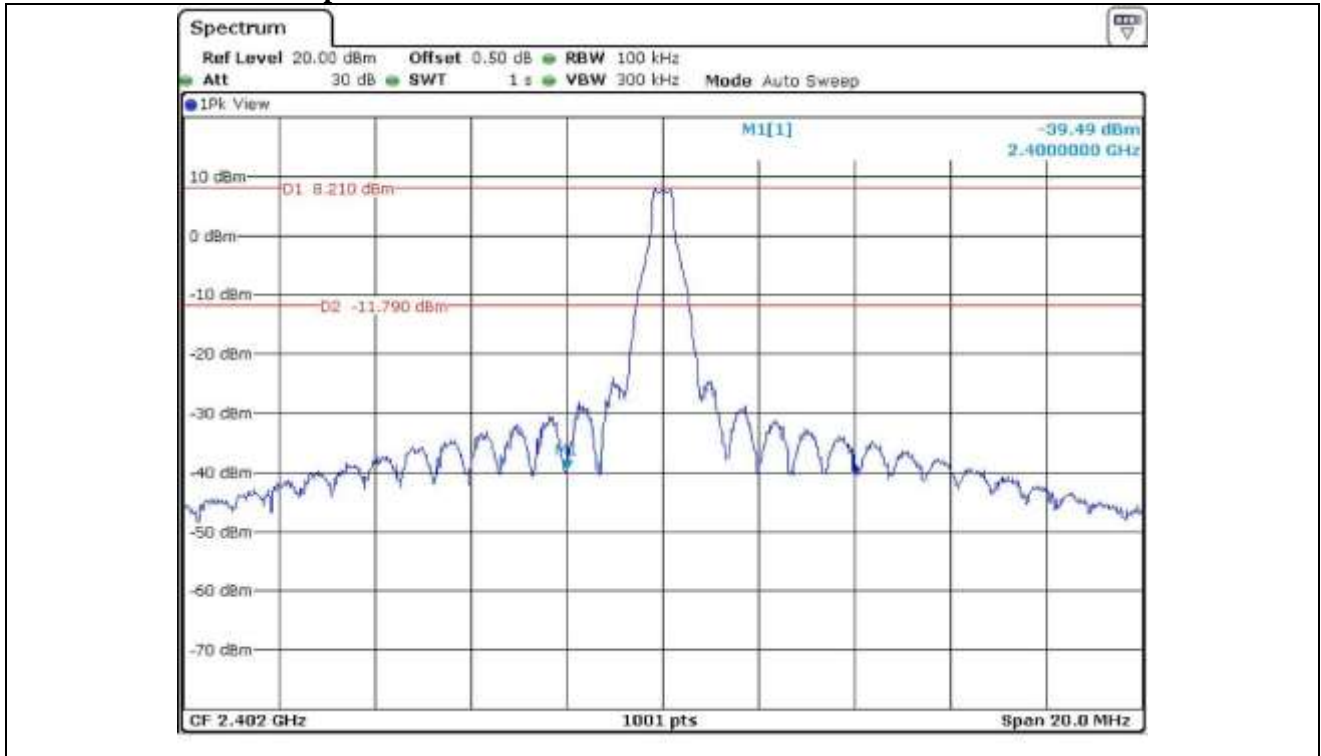


Low Channel

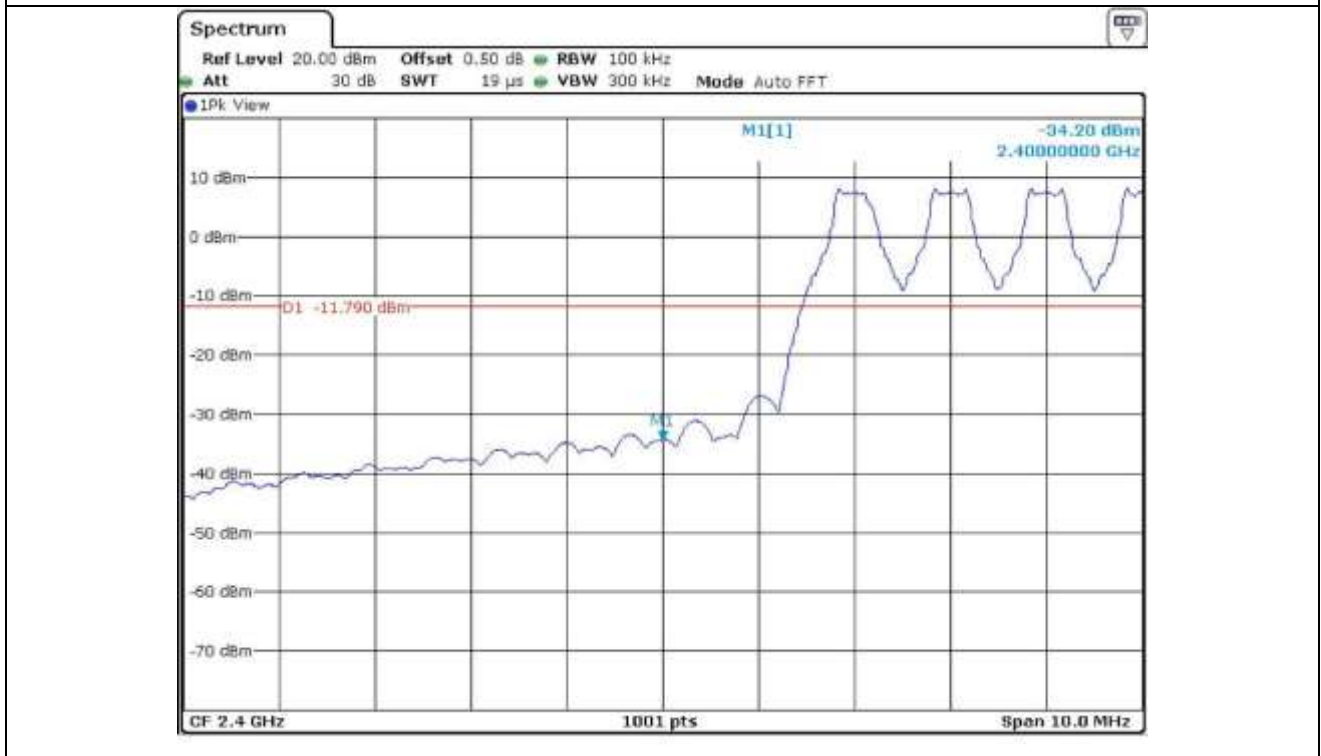


Low Channel

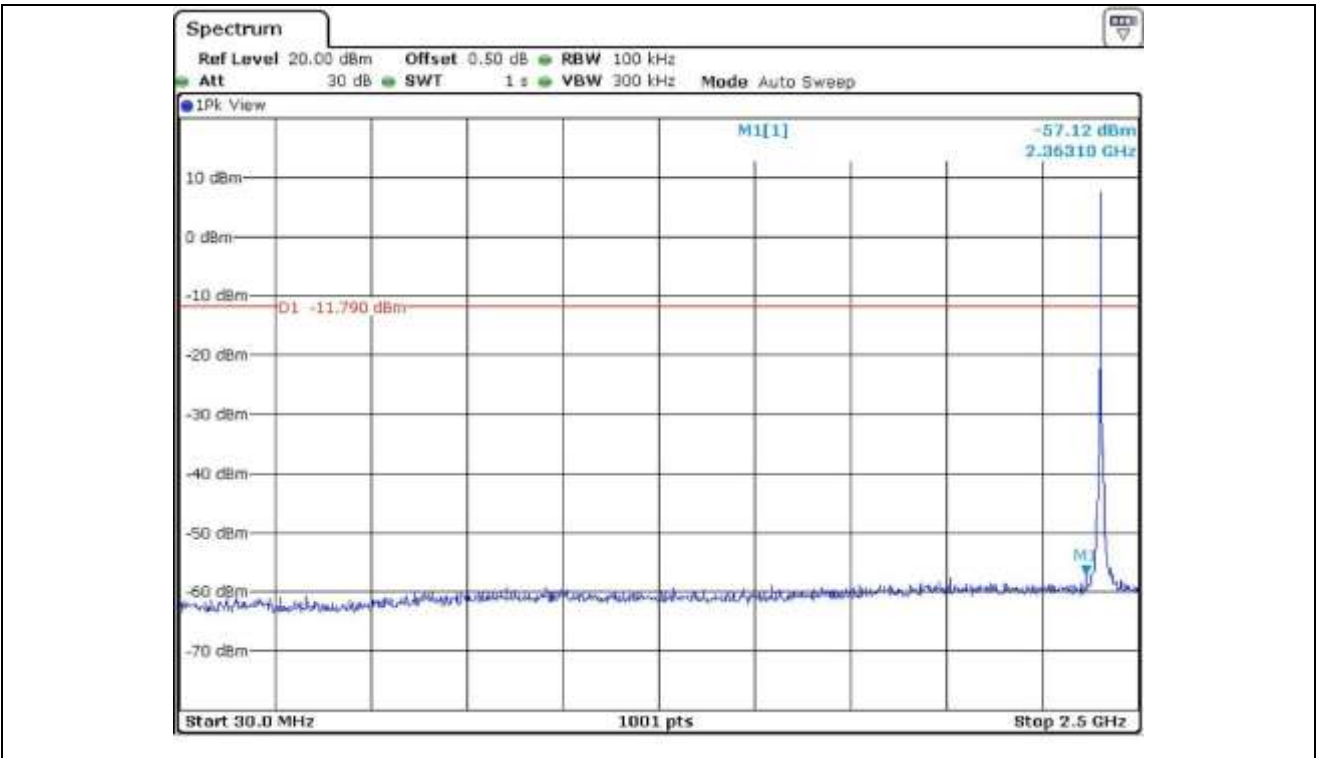


Low Channel

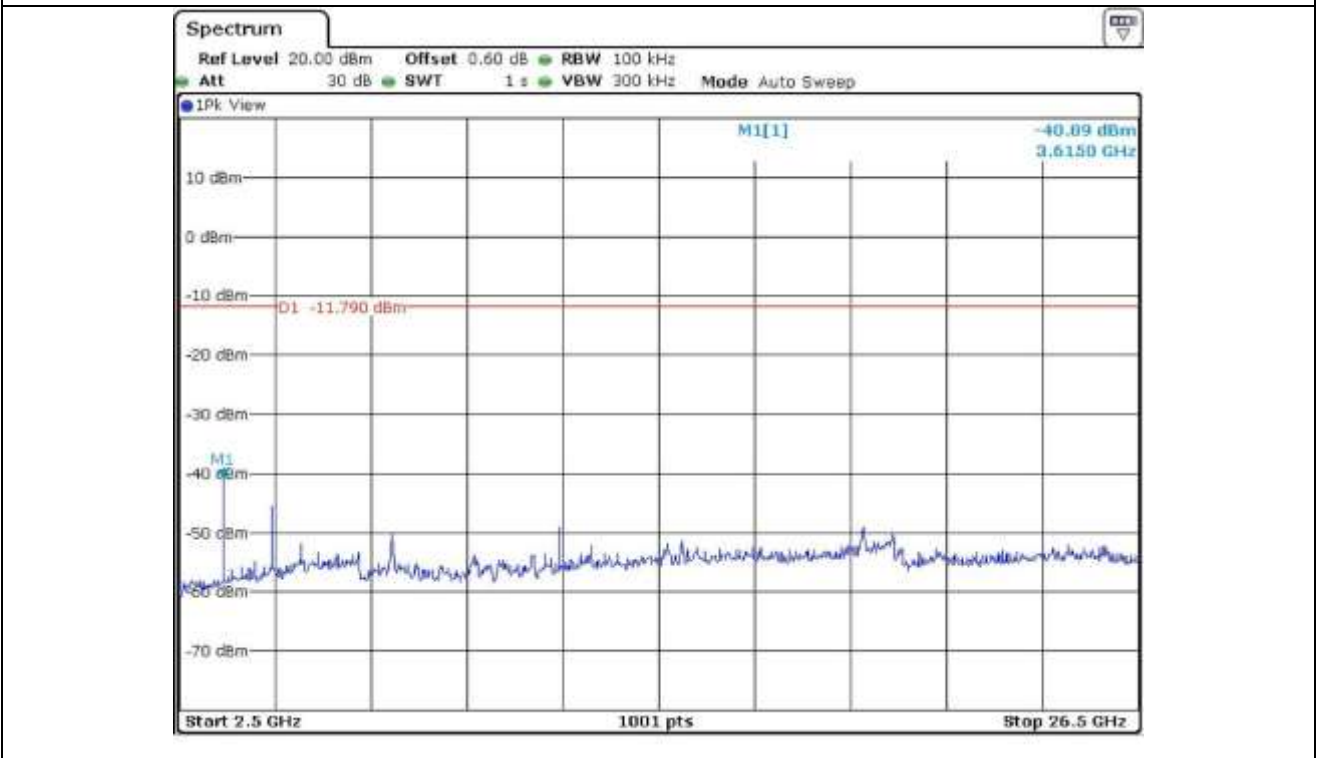


Low Channel

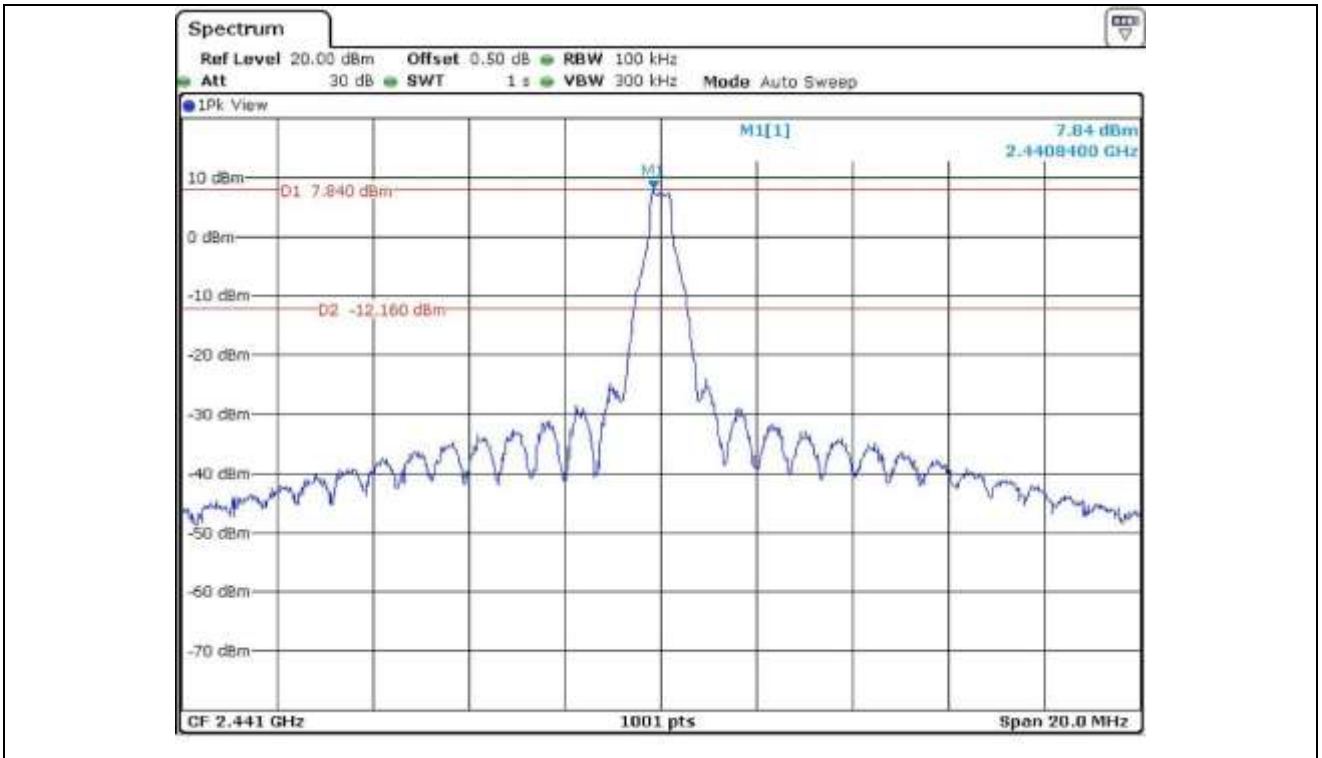


Middle Channel

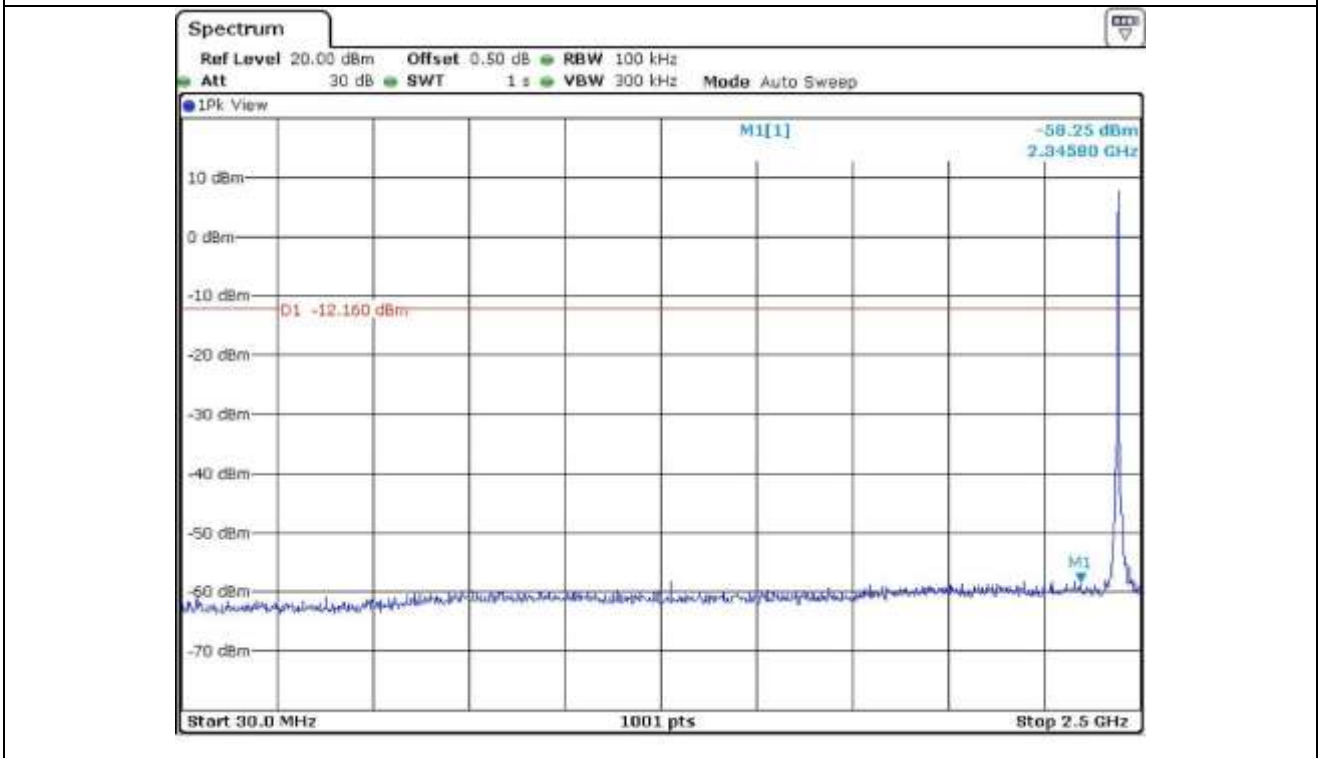


Middle Channel

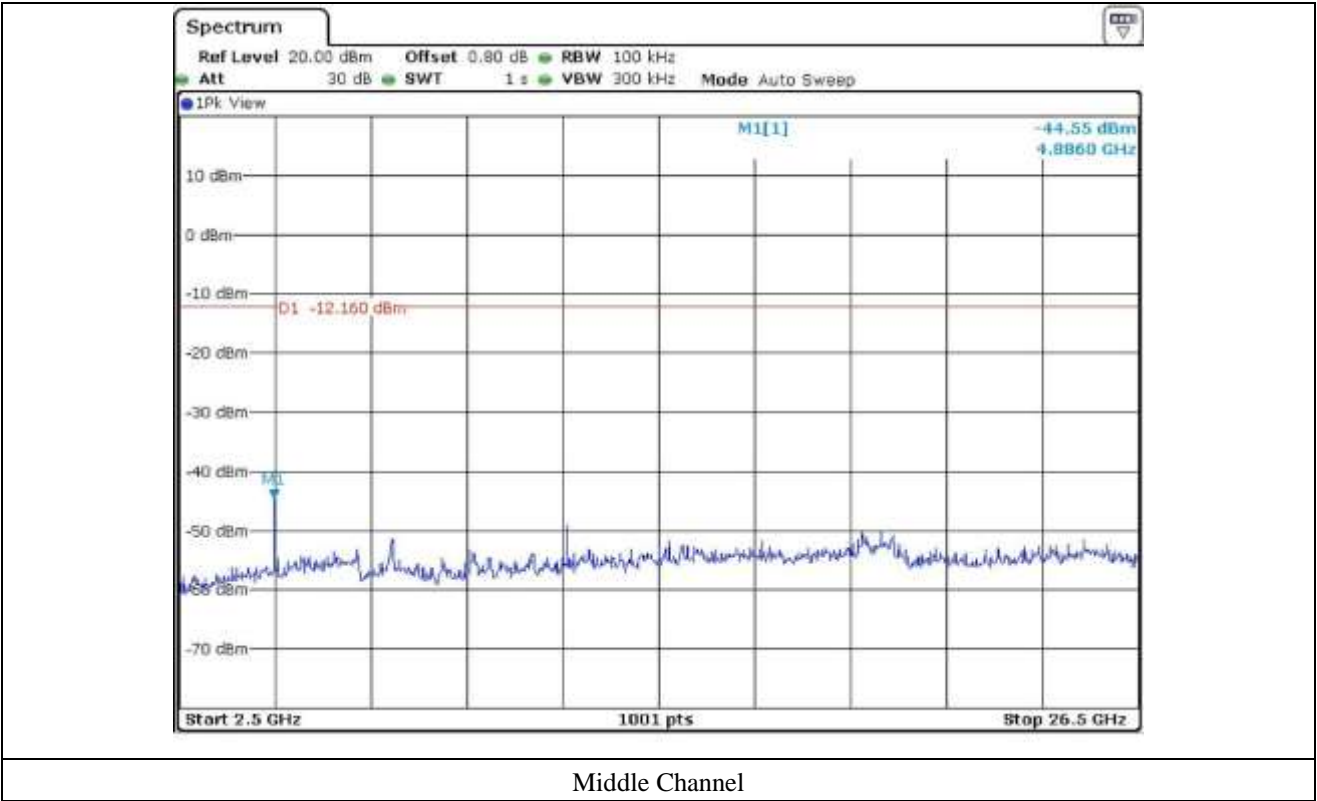


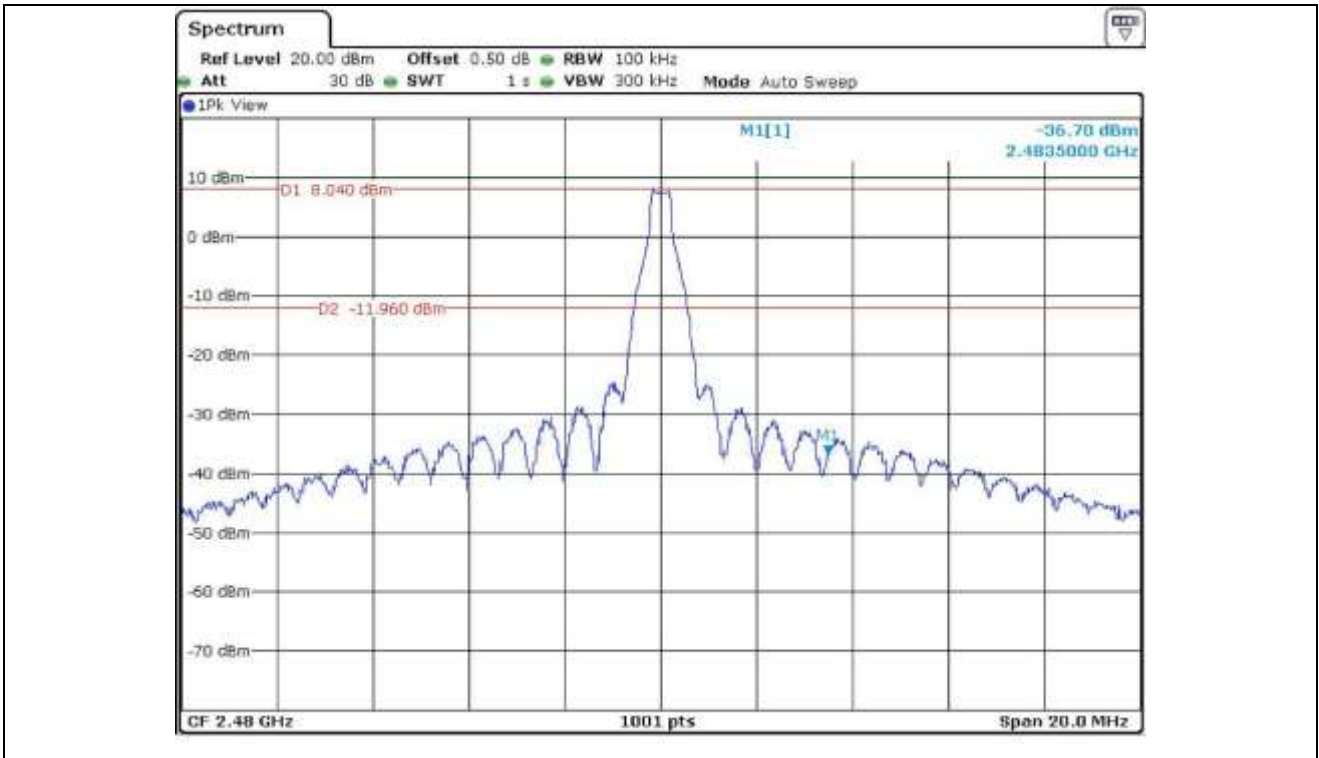


High Channel

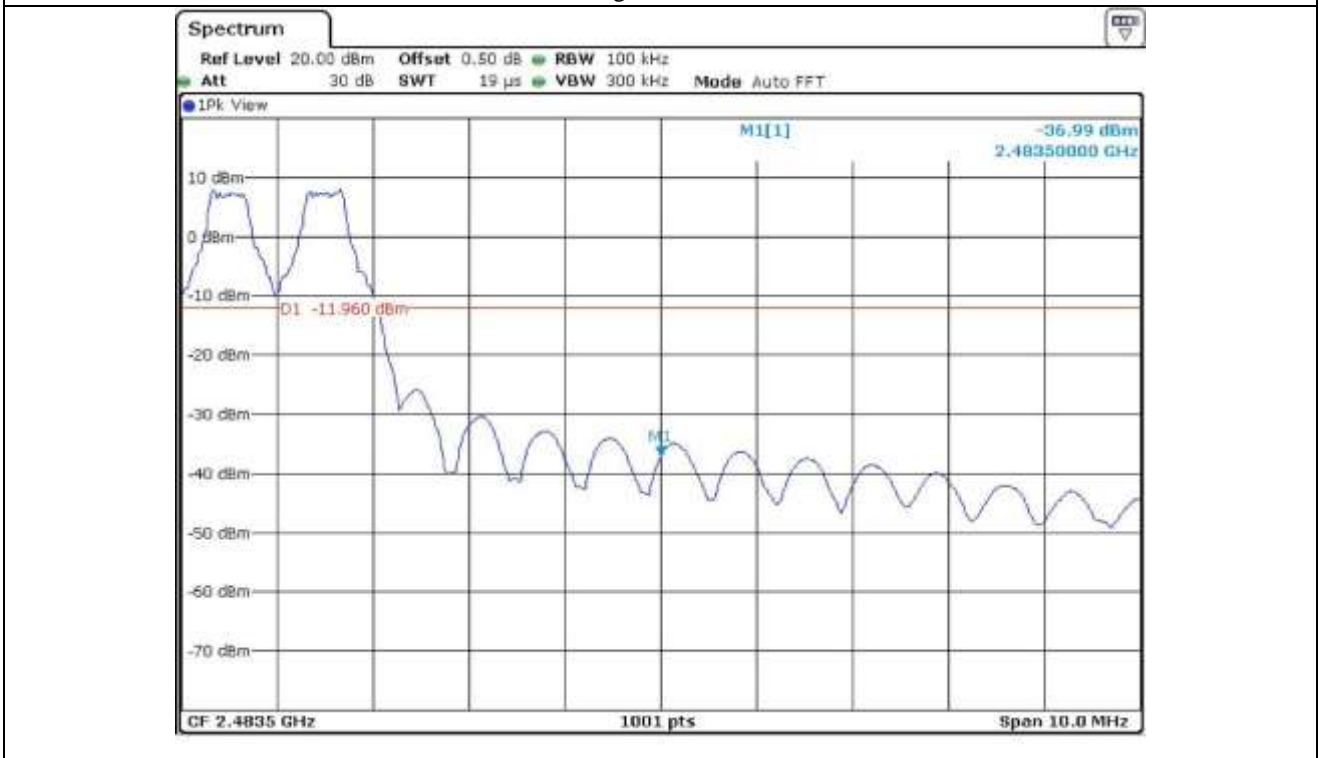

High Channel

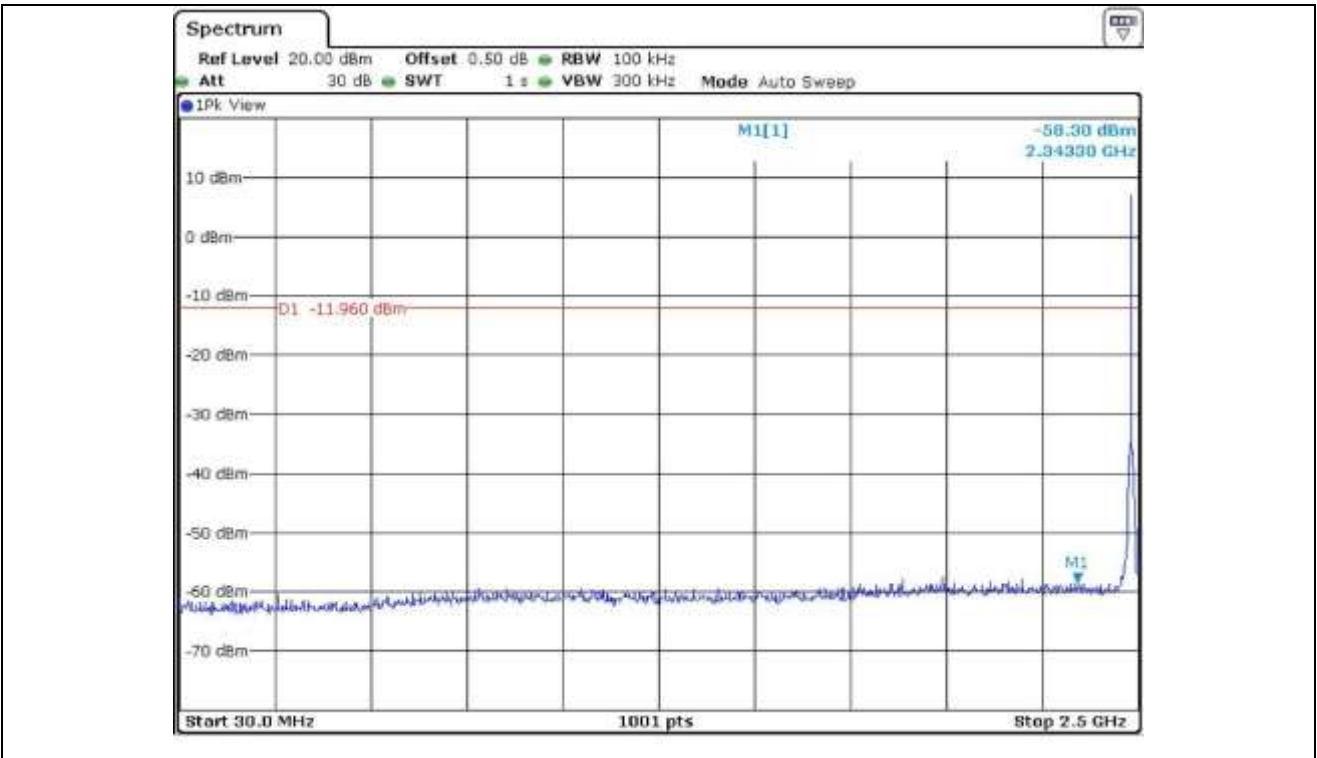


High Channel

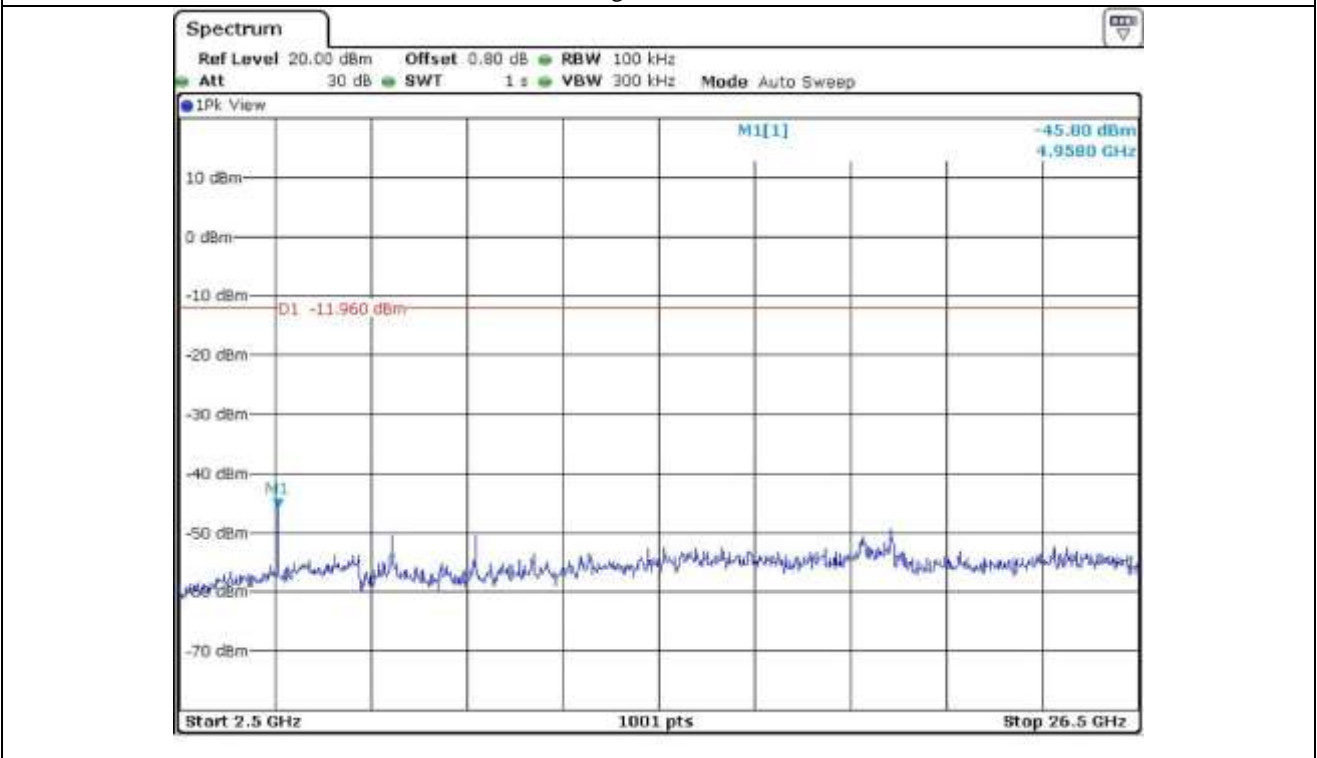


High Channel


12.5.2 Test data for 2 Mbps

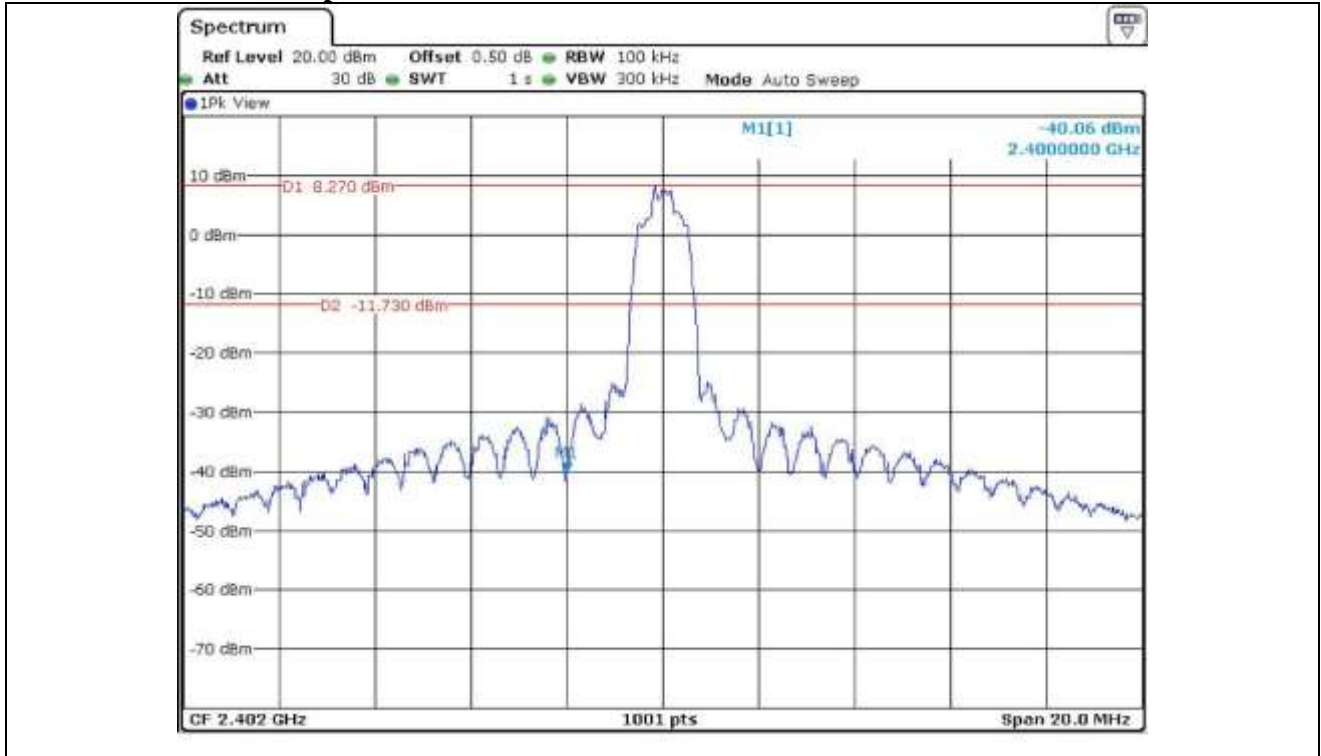


Low Channel

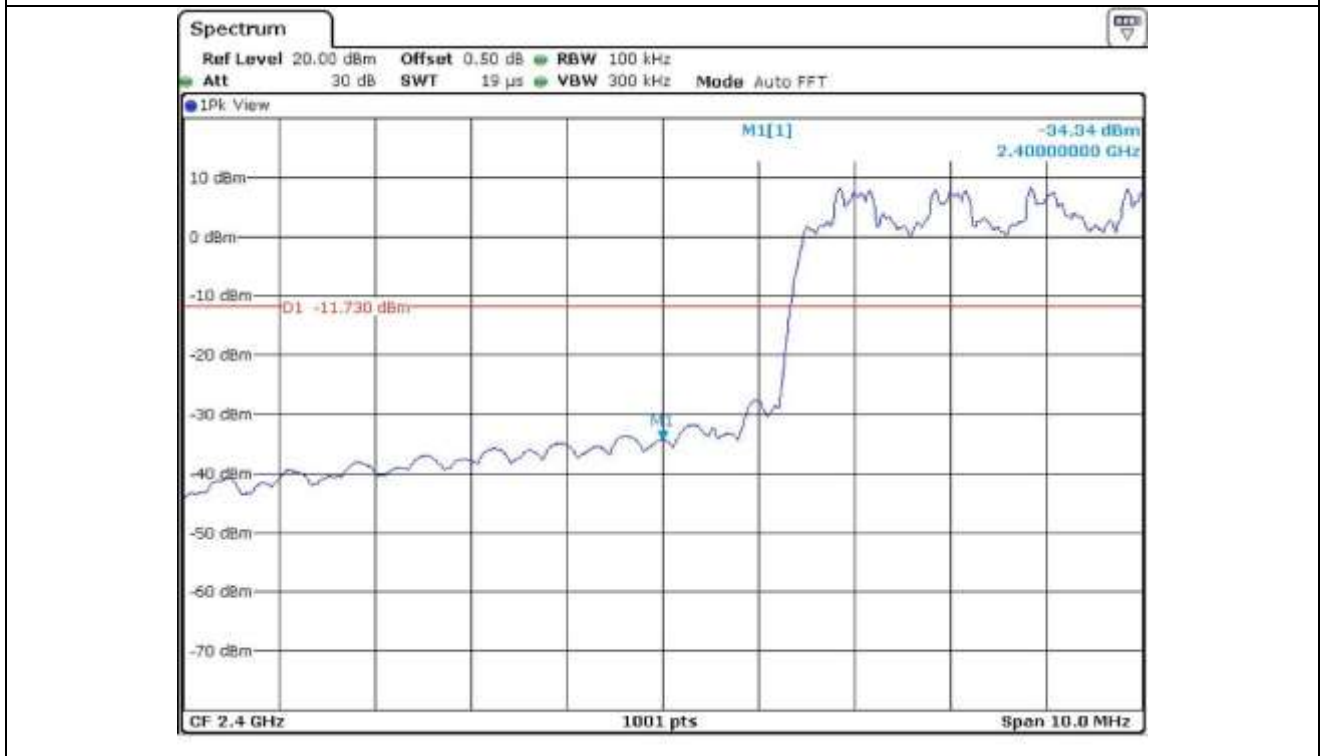


Low Channel

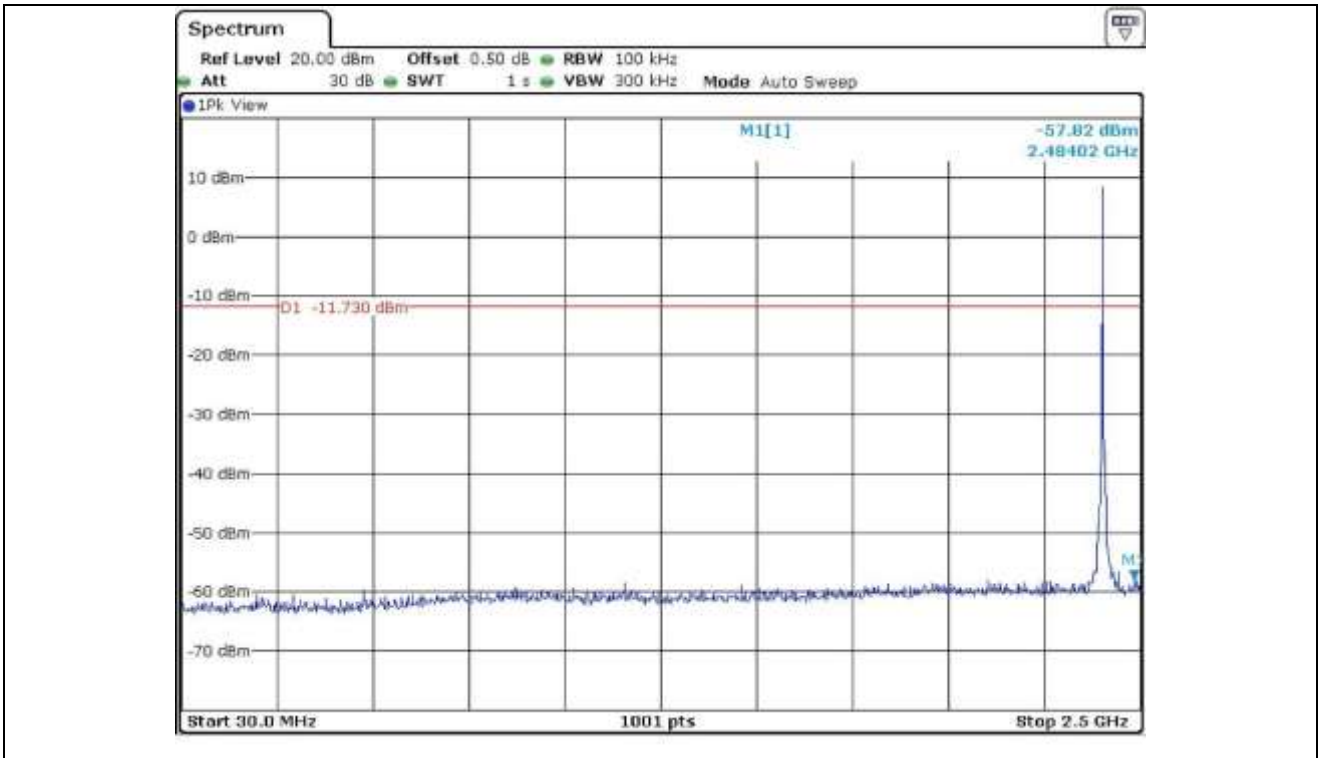


Low Channel

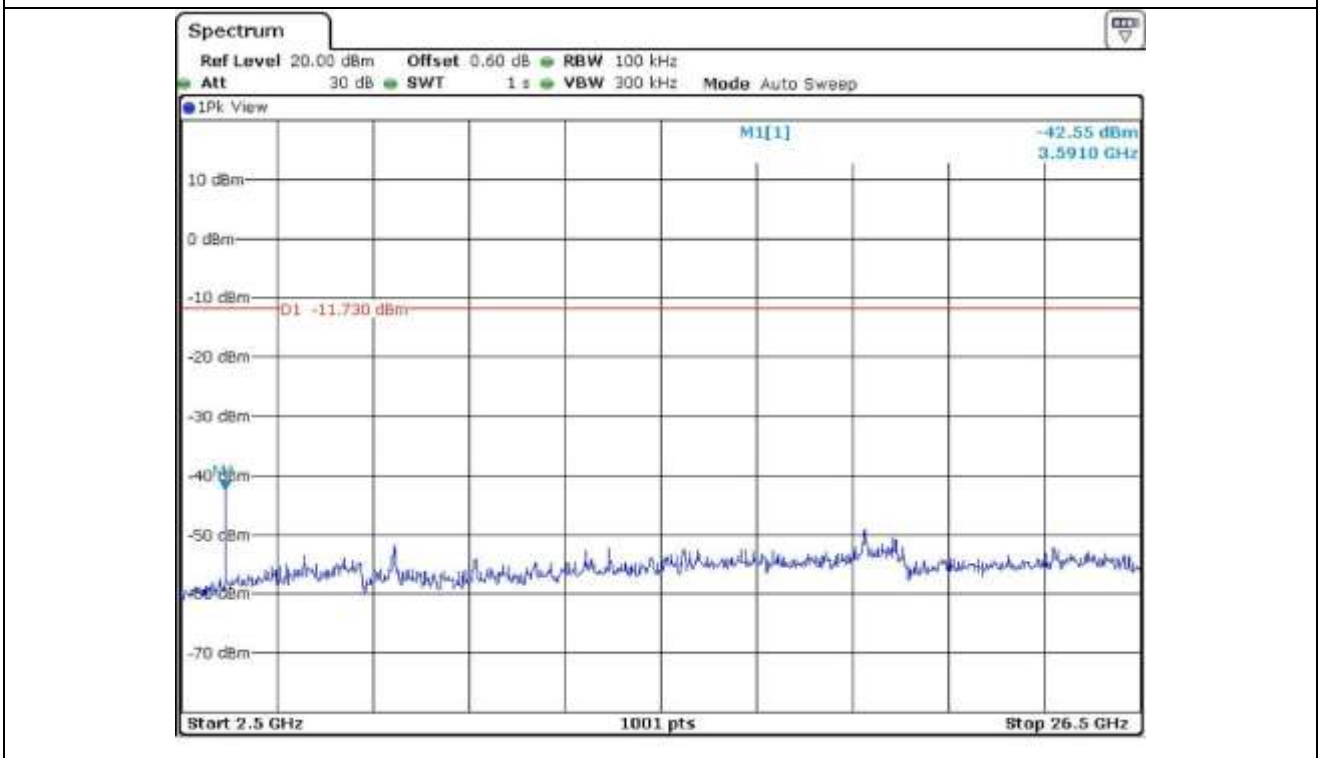


Low Channel

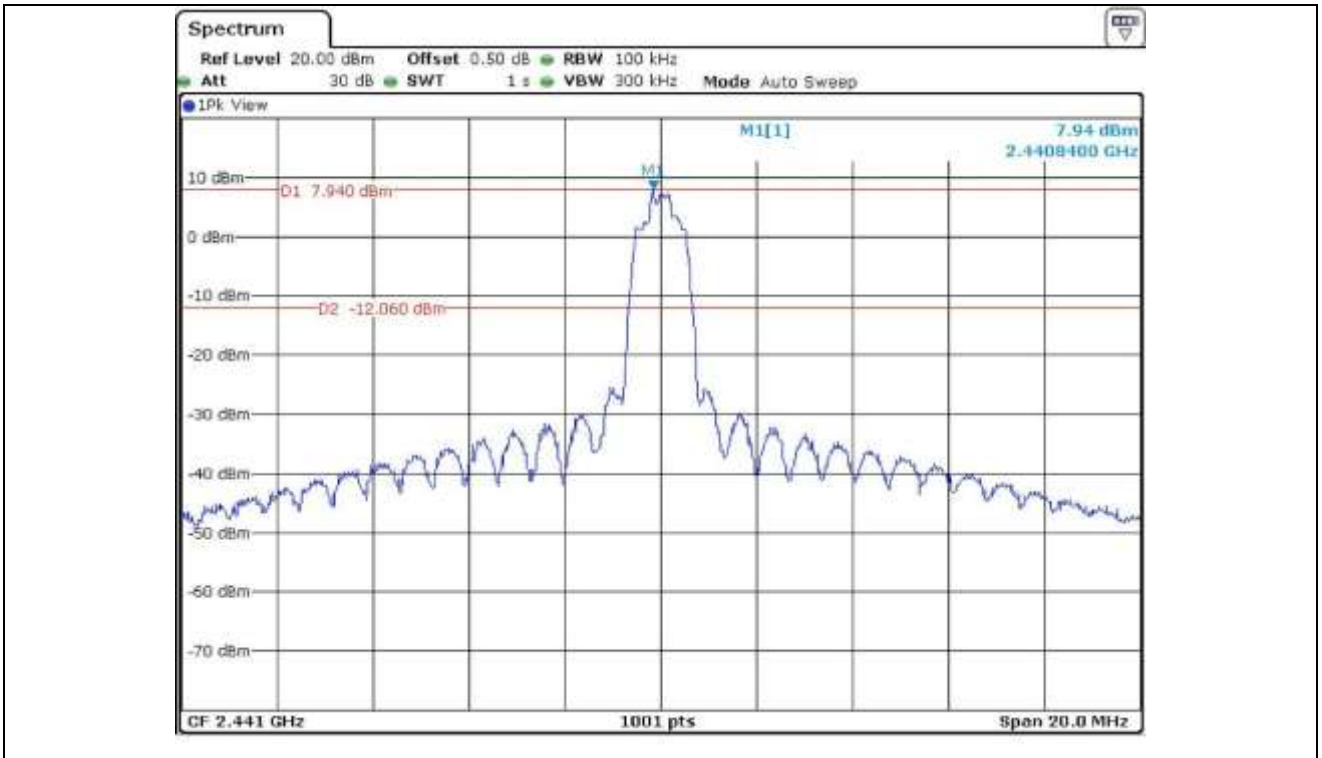


Middle Channel

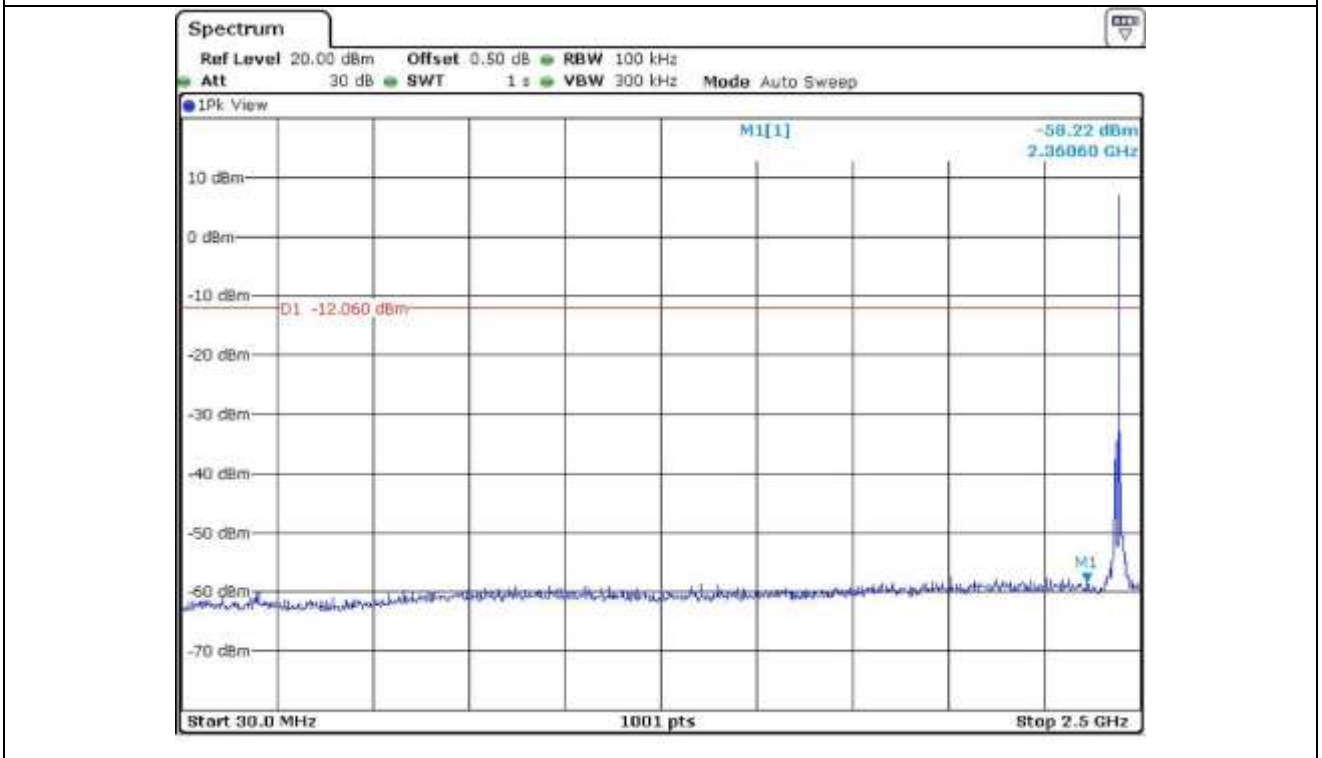


Middle Channel

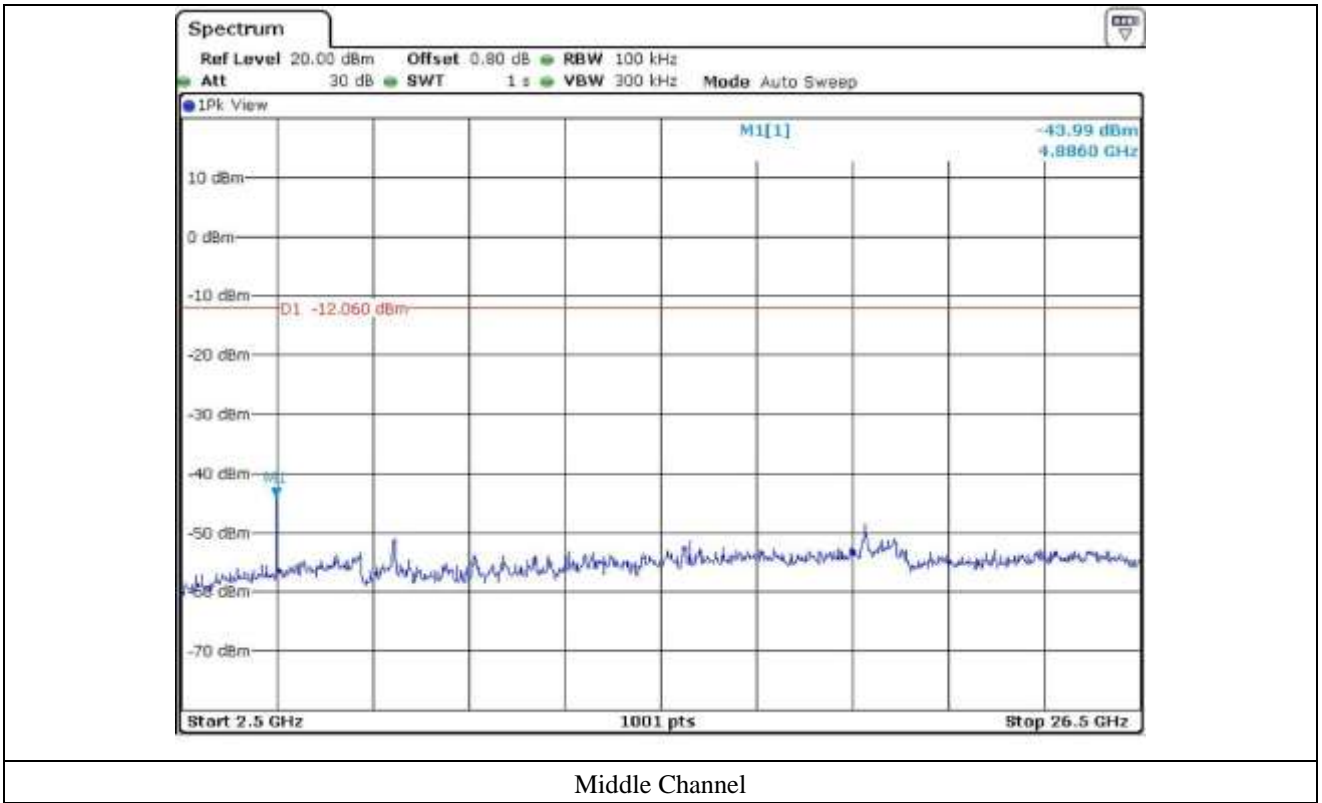


Middle Channel

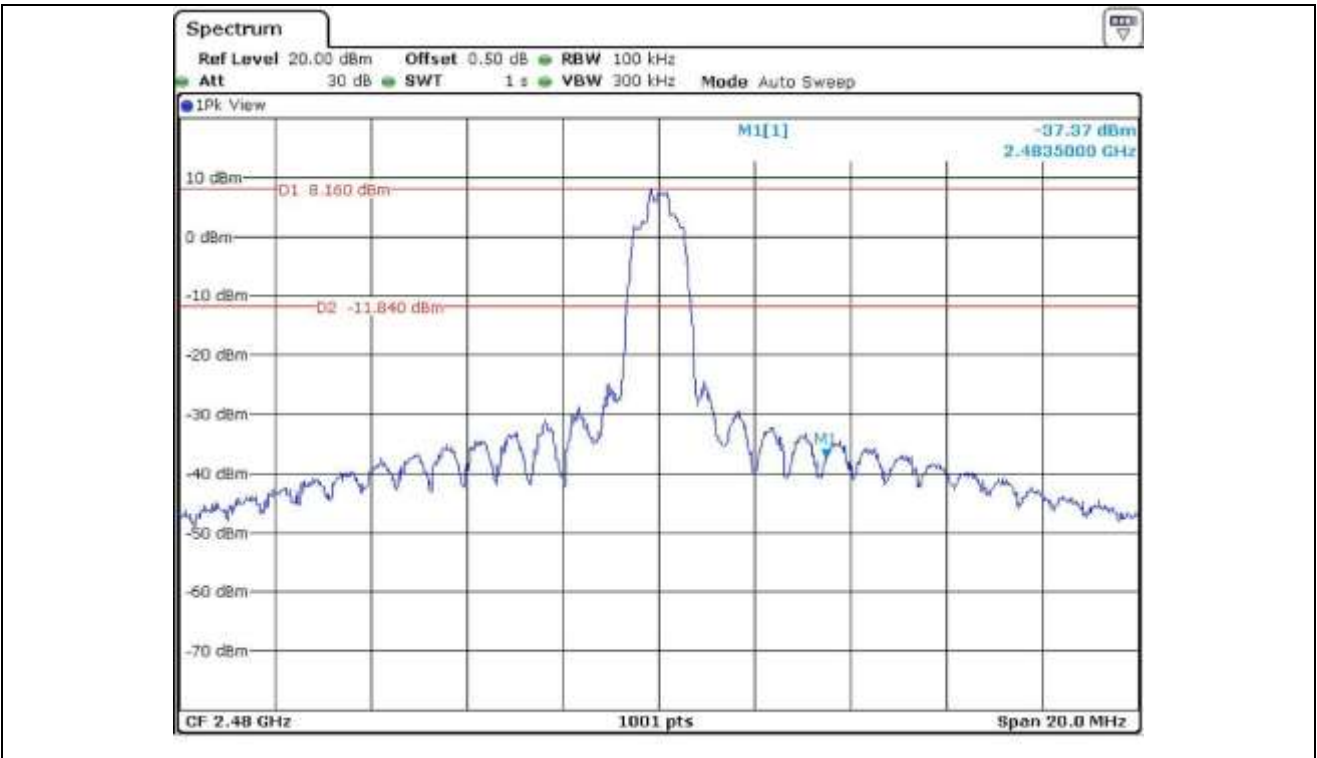


High Channel

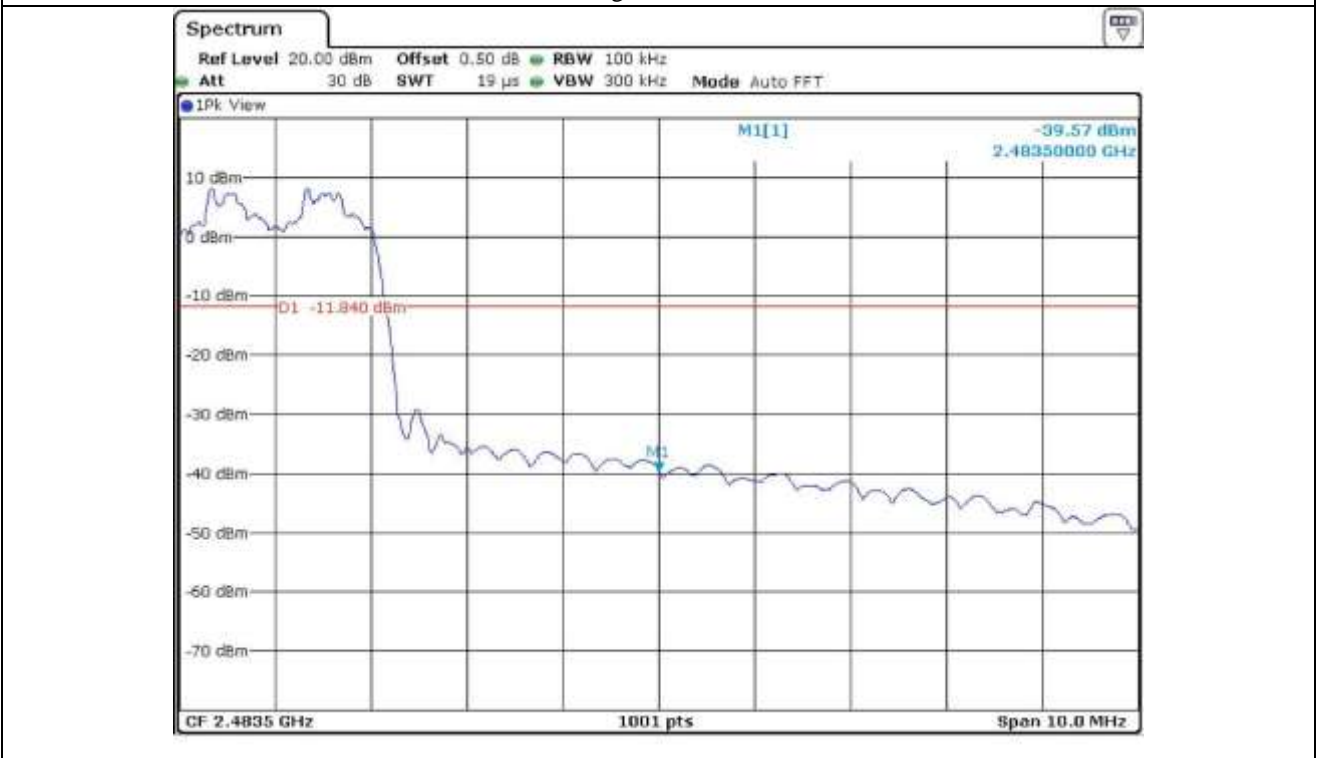

High Channel

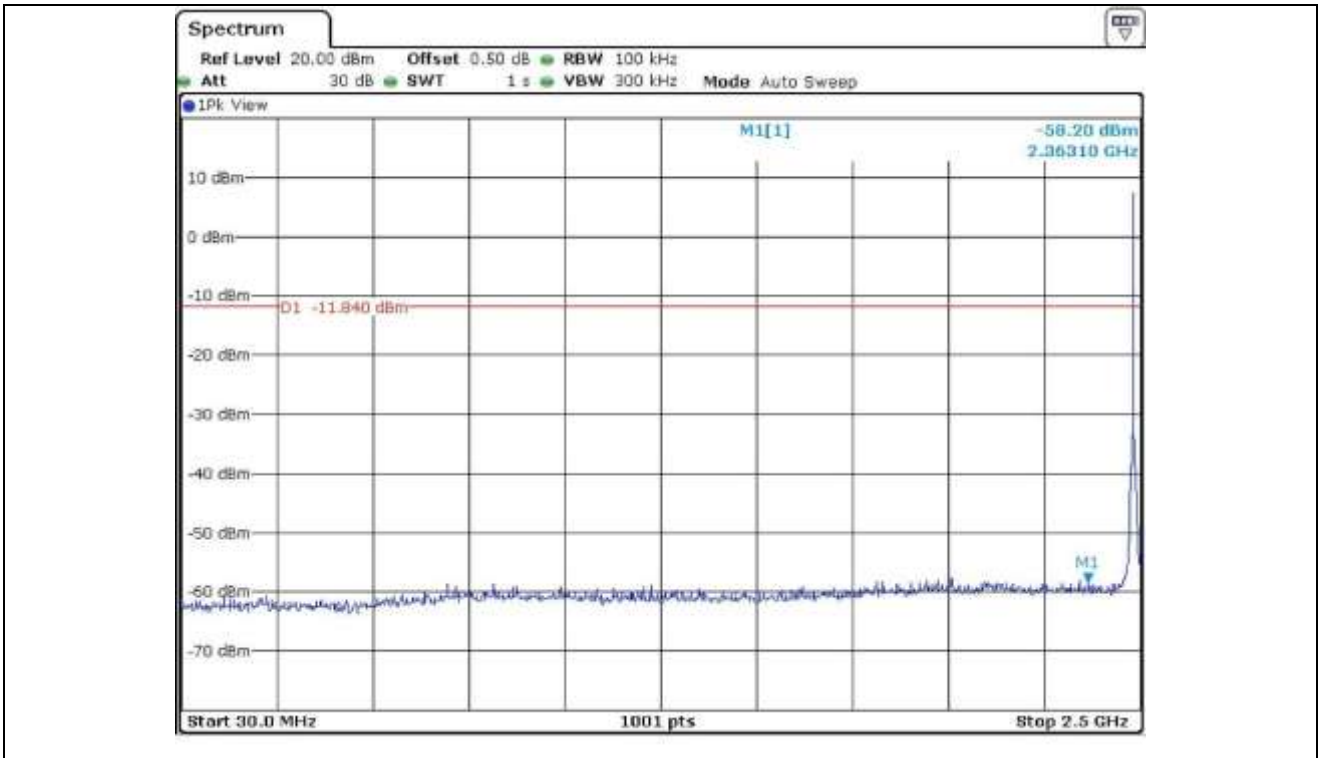


High Channel

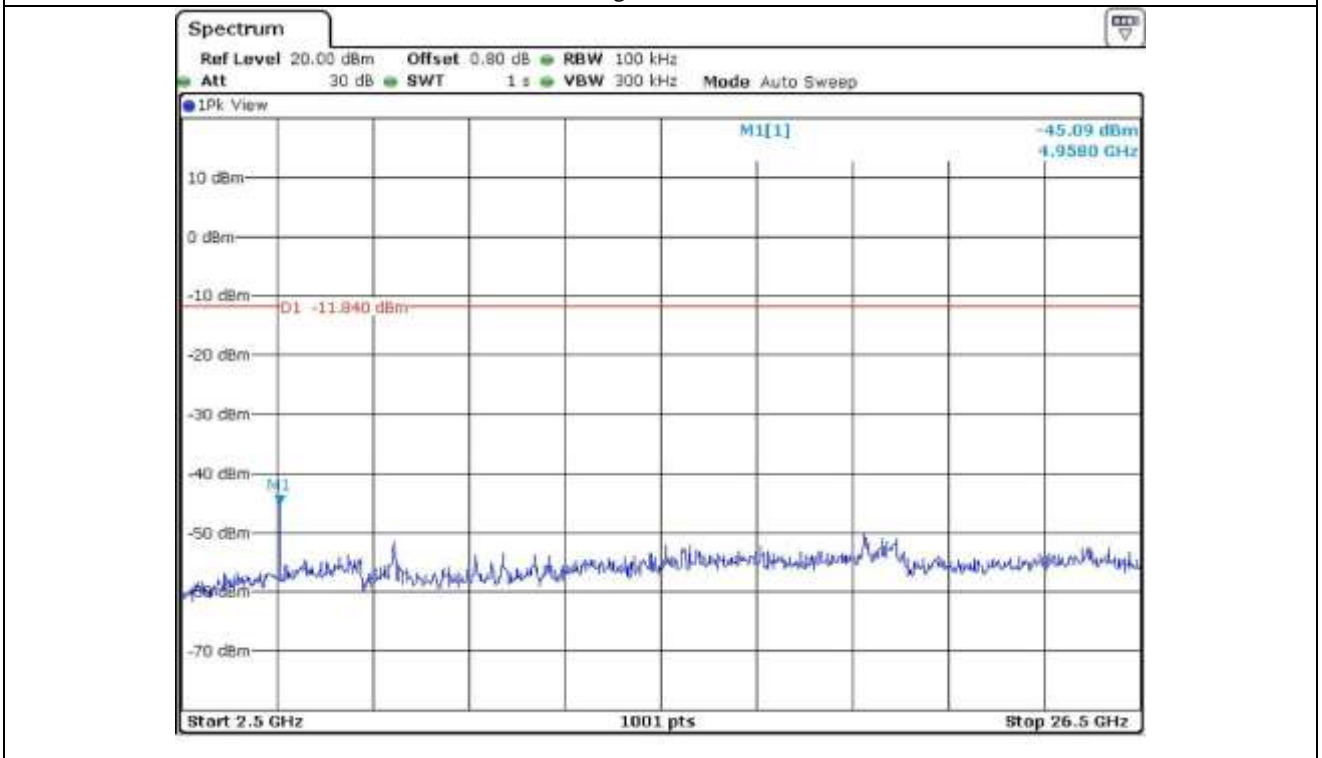

High Channel


12.5.3 Test data for 3 Mbps

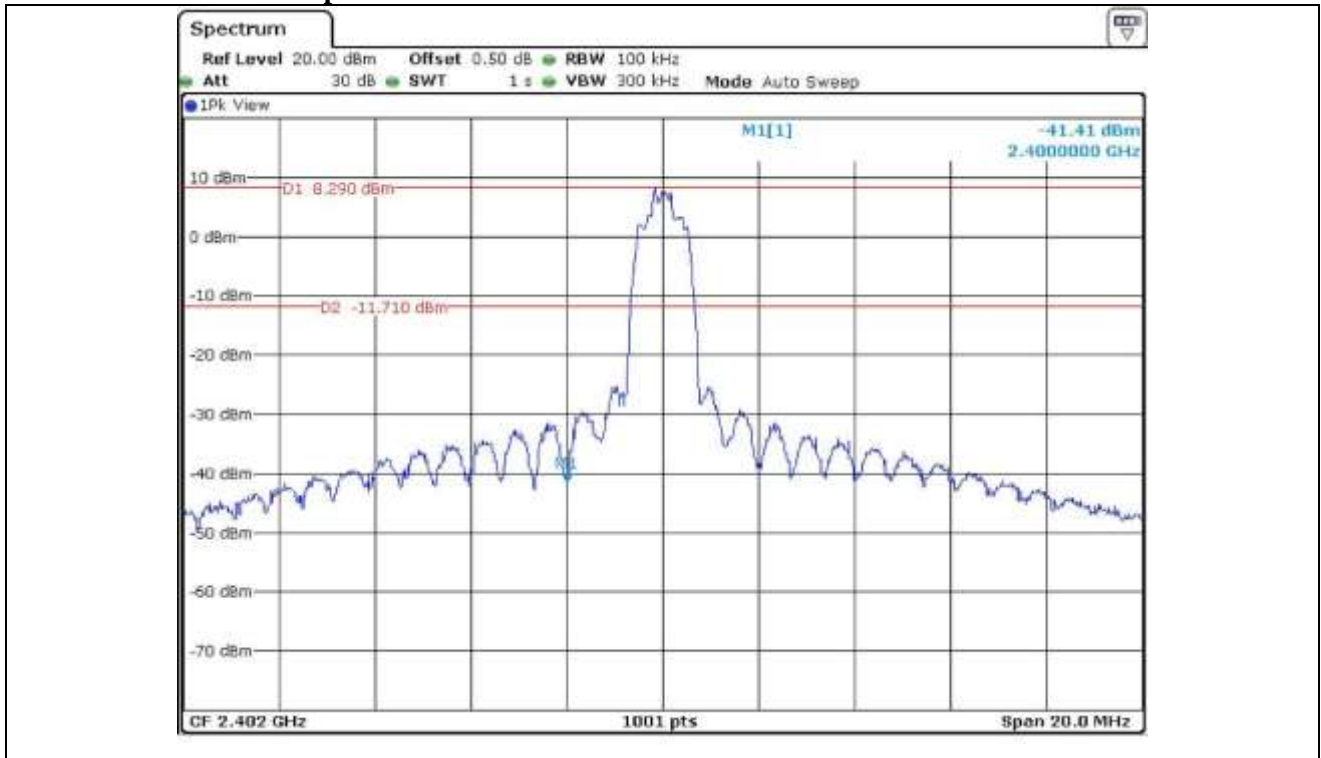


Low Channel




Low Channel

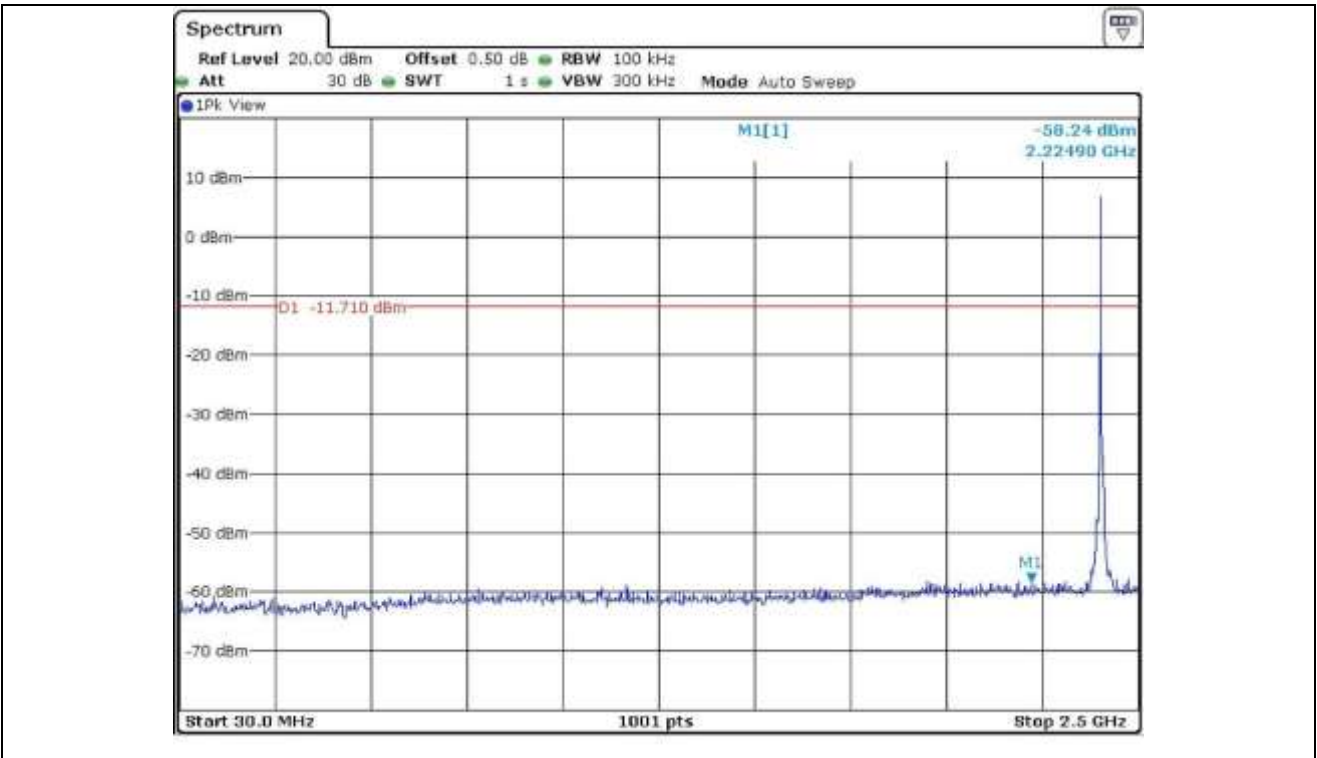


Low Channel

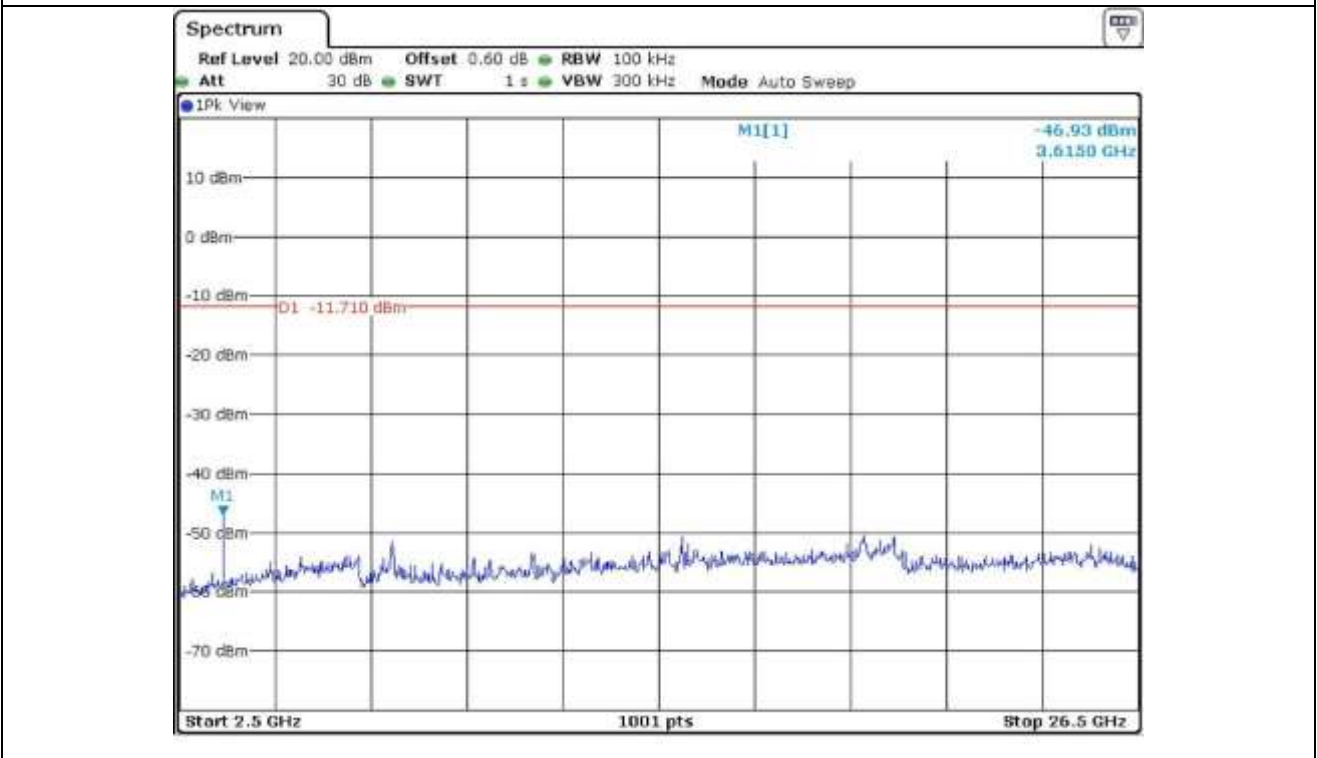


Low Channel

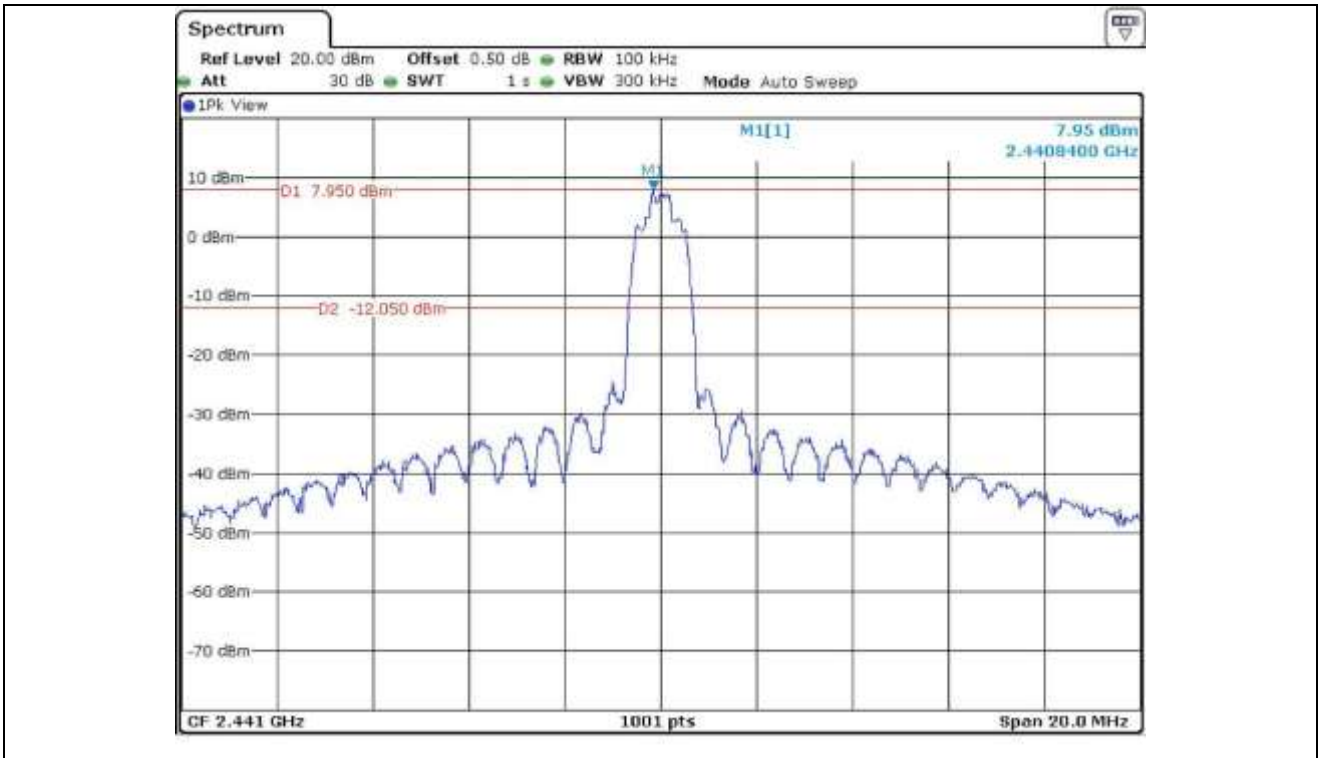


Middle Channel

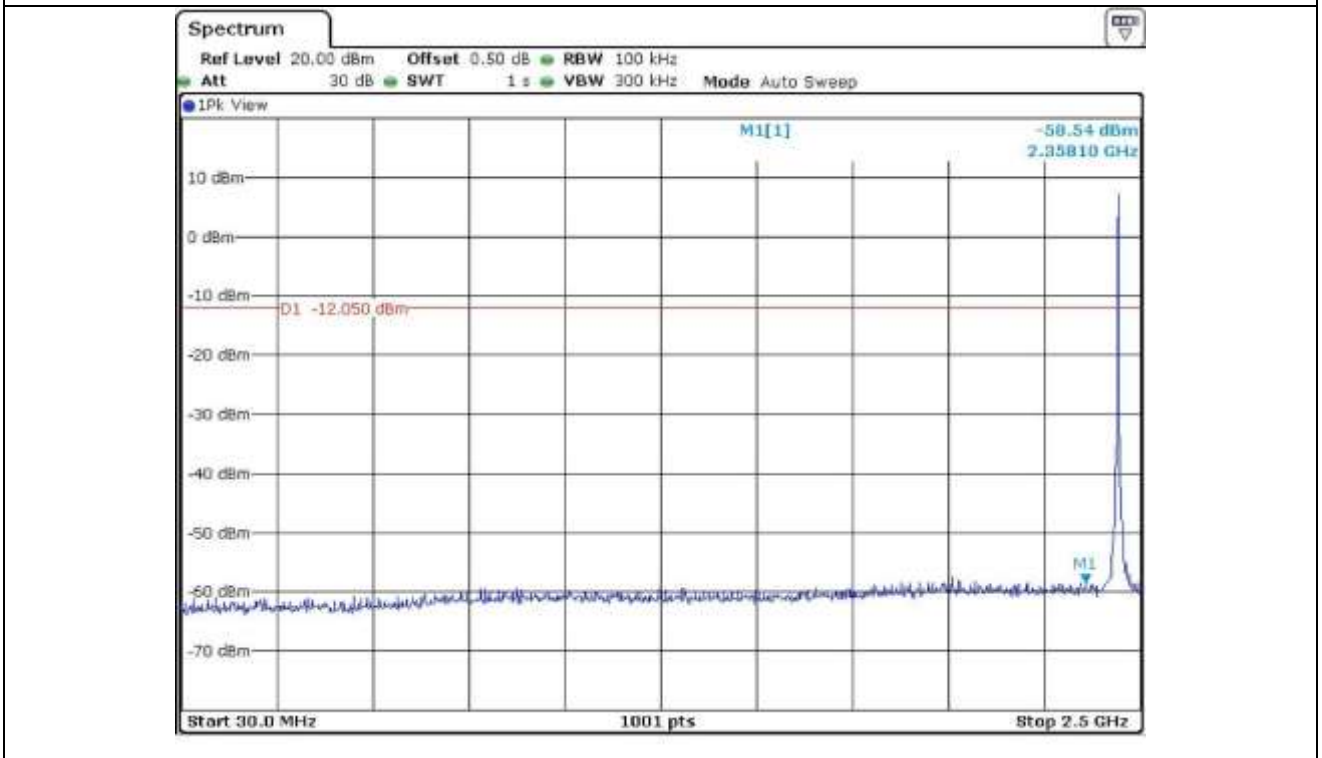

Middle Channel

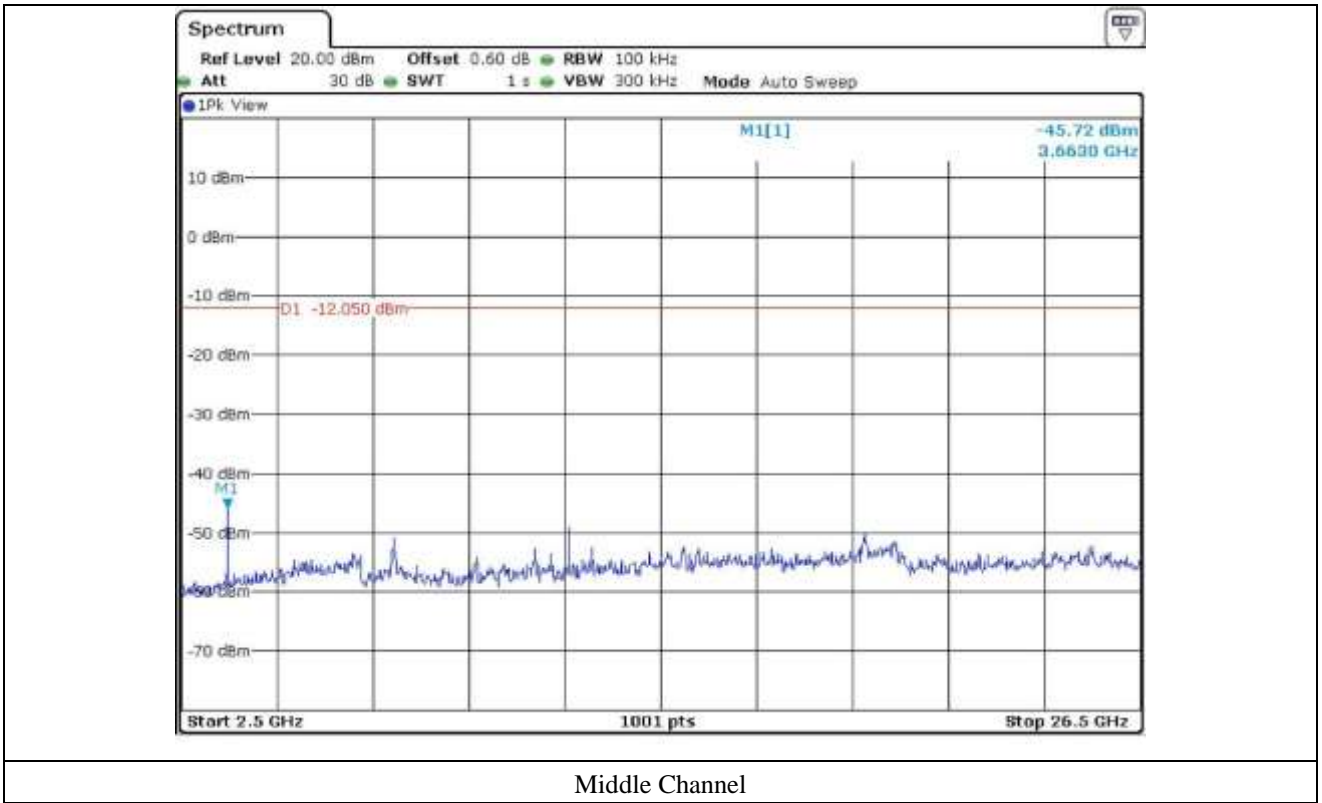


Middle Channel

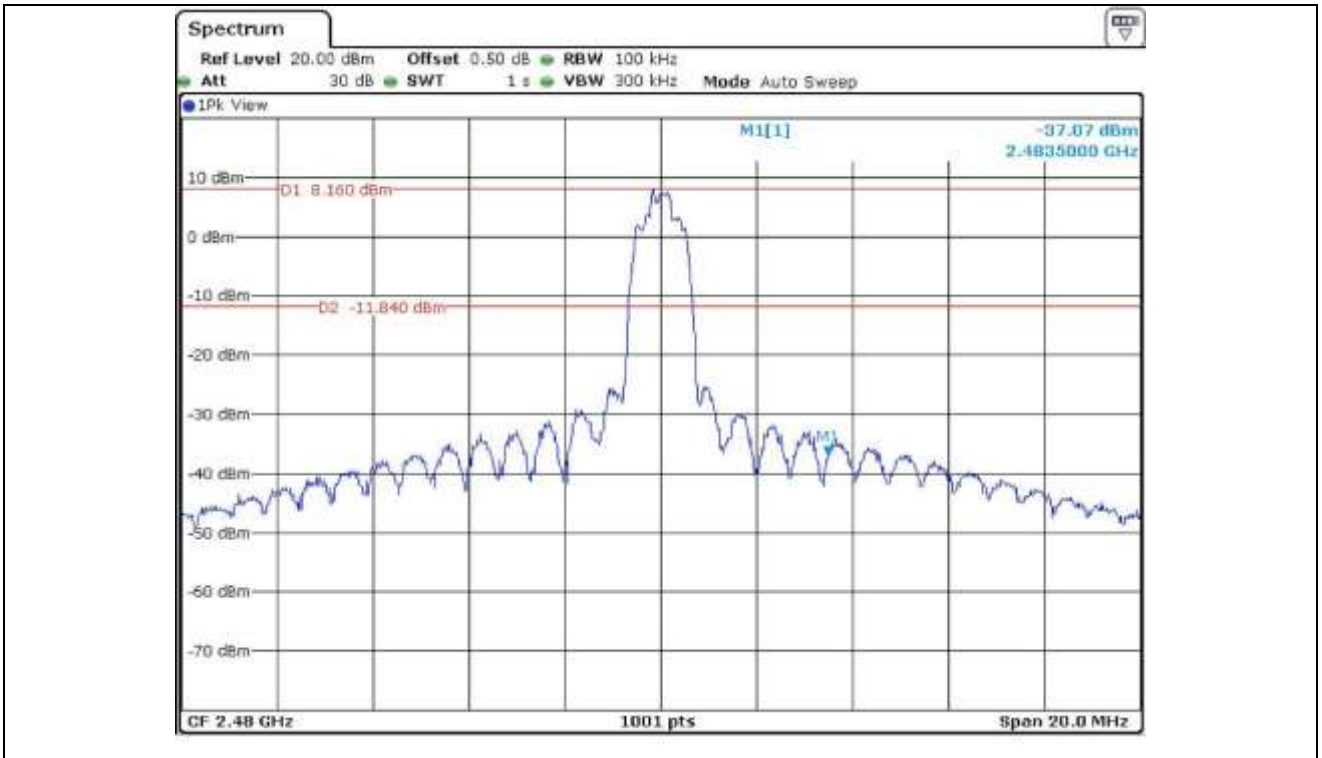


High Channel



High Channel

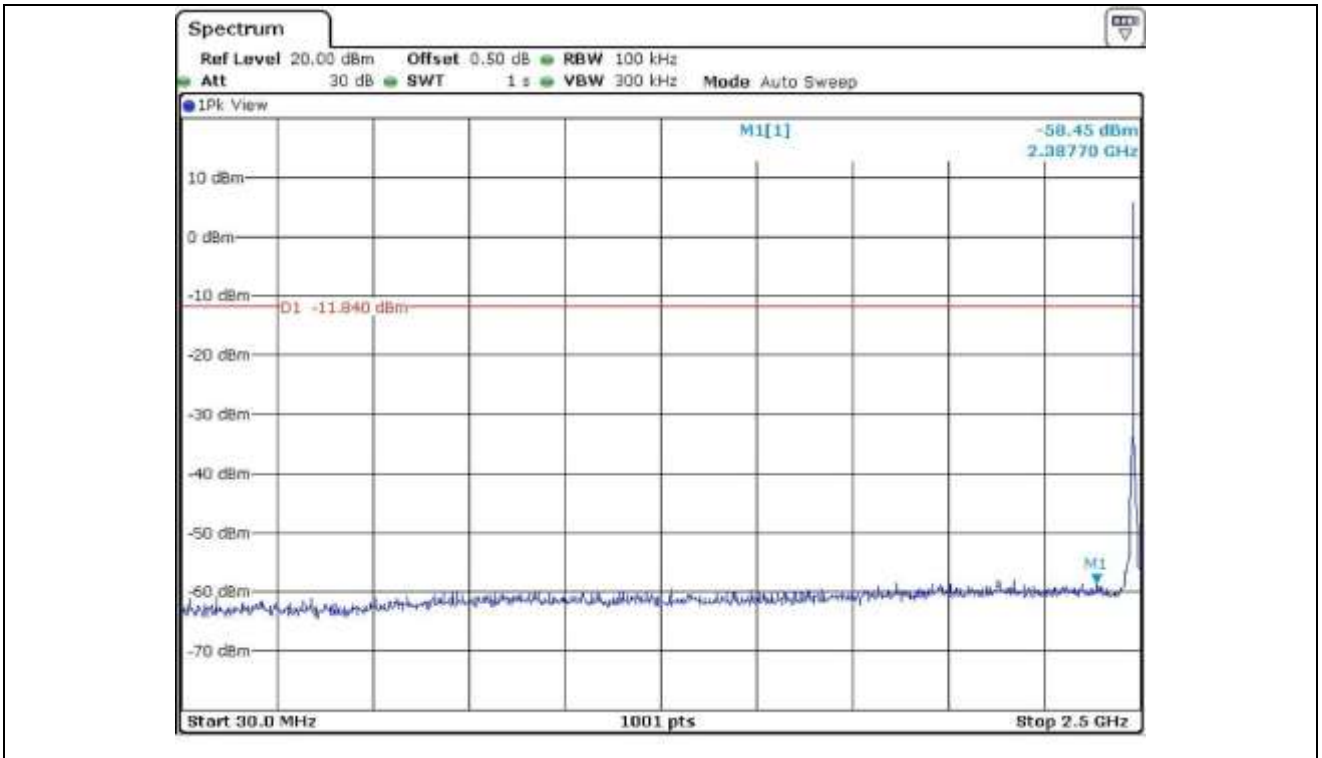

High Channel

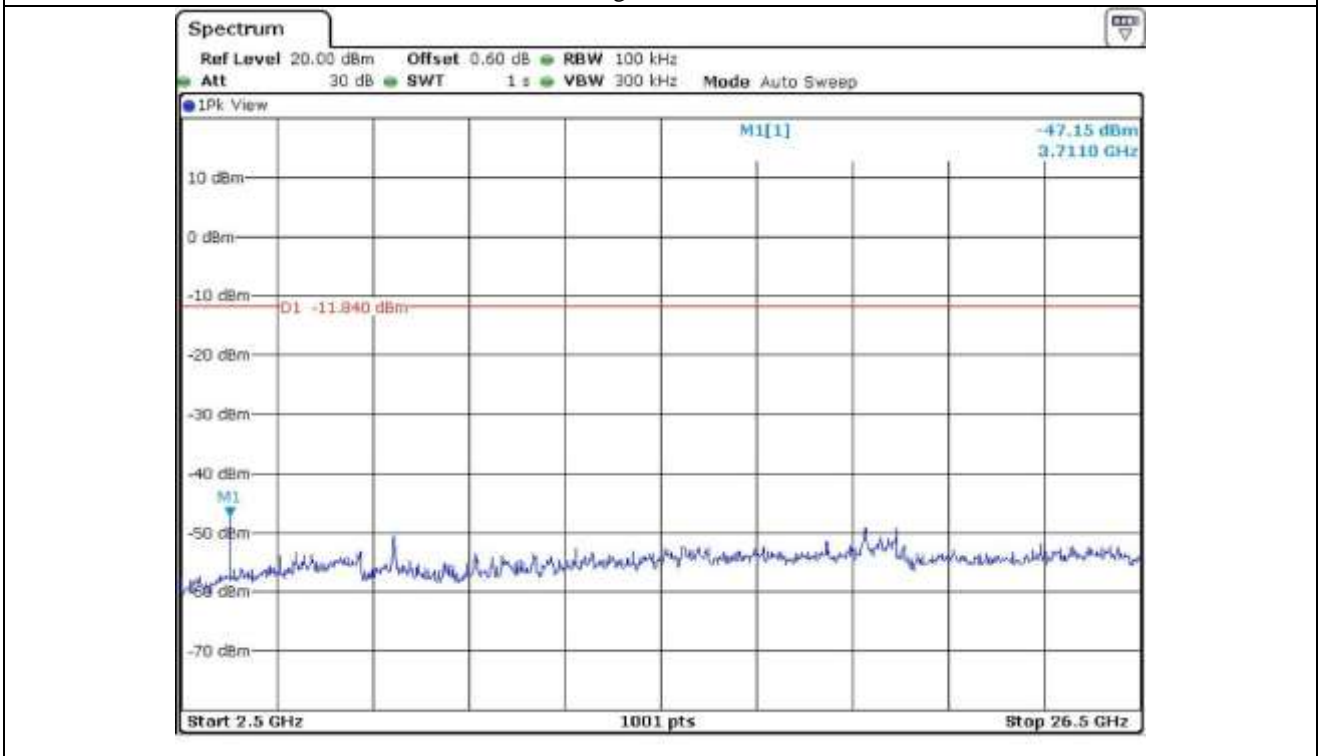

High Channel

12.6 Test data for Transmitting mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band

12.6.1.1 Test data for 1 Mbps

- Test Date : September 26, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	40.68	Peak	H	27.10	7.50	43.00	32.28	74.00	41.72
	28.22	Average	H				19.82	54.00	34.18
	40.41	Peak	V				32.01	74.00	41.99
	28.13	Average	V				19.73	54.00	34.27
Test Data for Low Channel									
2 400.00	58.68	Peak	H	27.10	7.50	43.00	50.28	74.00	23.72
	30.24	Average	H				21.84	54.00	32.16
	58.71	Peak	V				50.31	74.00	23.69
	30.11	Average	V				21.71	54.00	32.29
Test Data for High Channel									
2 483.50	58.61	Peak	H	27.10	7.50	43.00	50.21	74.00	23.79
	45.17	Average	H				36.77	54.00	17.23
	59.26	Peak	V				50.86	74.00	23.14
	46.81	Average	V				38.41	54.00	15.59

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Hyung-Kwon, Oh / Engineer

12.6.1.2 Test data for 2 Mbps

- Test Date : September 26, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	38.27	Peak	H	27.10	7.50	43.00	29.87	74.00	44.13
	29.30	Average	H				20.90	54.00	33.10
	39.11	Peak	V				30.71	74.00	43.29
	28.74	Average	V				20.34	54.00	33.66
Test Data for Low Channel									
2 400.00	57.55	Peak	H	27.10	7.50	43.00	49.15	74.00	24.85
	45.36	Average	H				36.96	54.00	17.04
	57.60	Peak	V				49.20	74.00	24.80
	46.07	Average	V				37.67	54.00	16.33
Test Data for High Channel									
2 483.50	57.26	Peak	H	27.10	7.50	43.00	48.86	74.00	25.14
	44.66	Average	H				36.26	54.00	17.74
	57.92	Peak	V				49.52	74.00	24.48
	45.70	Average	V				37.30	54.00	16.70

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Hyung-Kwon, Oh / Engineer

12.6.1.3 Test data for 3 Mbps

- Test Date : September 26, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	40.33	Peak	H	27.10	7.50	43.00	31.93	74.00	-42.07
	29.07	Average	H				20.67	54.00	-33.33
	40.20	Peak	V				31.80	74.00	-42.20
	28.87	Average	V				20.47	54.00	-33.53
Test Data for Low Channel									
2 400.00	57.40	Peak	H	27.10	7.50	43.00	49.00	74.00	-25.00
	46.08	Average	H				37.68	54.00	-16.32
	58.38	Peak	V				49.98	74.00	-24.02
	46.33	Average	V				37.93	54.00	-16.07
Test Data for High Channel									
2 483.50	56.72	Peak	H	27.10	7.50	43.00	48.32	74.00	-25.68
	45.03	Average	H				36.63	54.00	-17.37
	59.02	Peak	V				50.62	74.00	-23.38
	46.18	Average	V				37.78	54.00	-16.22

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Hyung-Kwon, Oh / Engineer

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.2.1 Test data for 1 Mbps

- Test Date : September 27, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	42.24	Peak	H	30.60	11.10	42.50	41.44	74.00	32.56
	34.19	Average	H				33.39	54.00	20.61
	42.36	Peak	V				41.56	74.00	32.44
	34.40	Average	V				33.60	54.00	20.40
Test Data for Middle Channel									
4 882.00	42.30	Peak	H	30.70	11.20	42.50	41.70	74.00	32.30
	34.26	Average	H				33.66	54.00	20.34
	42.41	Peak	V				41.81	74.00	32.19
	34.69	Average	V				34.09	54.00	19.91
Test Data for High Channel									
4 960.00	42.57	Peak	H	30.80	11.30	42.50	42.17	74.00	31.83
	34.32	Average	H				33.92	54.00	20.08
	42.45	Peak	V				42.05	74.00	31.95
	34.58	Average	V				34.18	54.00	19.82

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Hyung-Kwon, Oh / Engineer

12.6.2.2 Test data for 2 Mbps

- Test Date : September 27, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	42.80	Peak	H	30.60	11.10	42.50	42.00	74.00	32.00
	34.87	Average	H				34.07	54.00	19.93
	42.70	Peak	V				41.90	74.00	32.10
	34.77	Average	V				33.97	54.00	20.03
Test Data for Middle Channel									
4 882.00	43.25	Peak	H	30.70	11.20	42.50	42.65	74.00	31.35
	34.80	Average	H				34.20	54.00	19.80
	42.92	Peak	V				42.32	74.00	31.68
	34.75	Average	V				34.15	54.00	19.85
Test Data for High Channel									
4 960.00	43.71	Peak	H	30.80	11.30	42.50	43.31	74.00	30.69
	34.77	Average	H				34.37	54.00	19.63
	44.35	Peak	V				43.95	74.00	30.05
	34.69	Average	V				34.29	54.00	19.71

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Hyung-Kwon, Oh / Engineer

12.6.2.3 Test data for 3 Mbps

- Test Date : September 27, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	44.05	Peak	H	30.60	11.10	42.50	43.25	74.00	30.75
	34.81	Average	H				34.01	54.00	19.99
	43.74	Peak	V				42.94	74.00	31.06
	34.50	Average	V				33.70	54.00	20.30
Test Data for Middle Channel									
4 882.00	43.92	Peak	H	30.70	11.20	42.50	43.32	74.00	30.68
	34.77	Average	H				34.17	54.00	19.83
	43.50	Peak	V				42.90	74.00	31.10
	34.39	Average	V				33.79	54.00	20.21
Test Data for High Channel									
4 960.00	44.33	Peak	H	30.80	11.30	42.50	43.93	74.00	30.07
	34.66	Average	H				34.26	54.00	19.74
	44.07	Peak	V				43.67	74.00	30.33
	34.75	Average	V				34.35	54.00	19.65

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Hyung-Kwon, Oh / Engineer

13. RADIATED EMISSION TEST

13.1 Operating environment

Temperature : 21.6 °C
 Relative humidity : 43.0 % R.H.

13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

13.3 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)
■ - ESCI	Rohde & Schwarz	Test Receiver	101012	Nov. 03, 2014 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 29, 2015 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	10041	Nov. 25, 2014 (1Y)
■ - DT3000	Innco System	Turn Table	930611	N/A
■ - MA4000-EP	Innco System	Antenna Master	3320611	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Jul. 10, 2014 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Apr. 30, 2015 (2Y)

All test equipment used is calibrated on a regular basis.

13.4 Test data for 1 Mbps

13.4.1 Test data for 30 MHz ~ 1 000 MHz

- Test Date : September 28, 2015
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

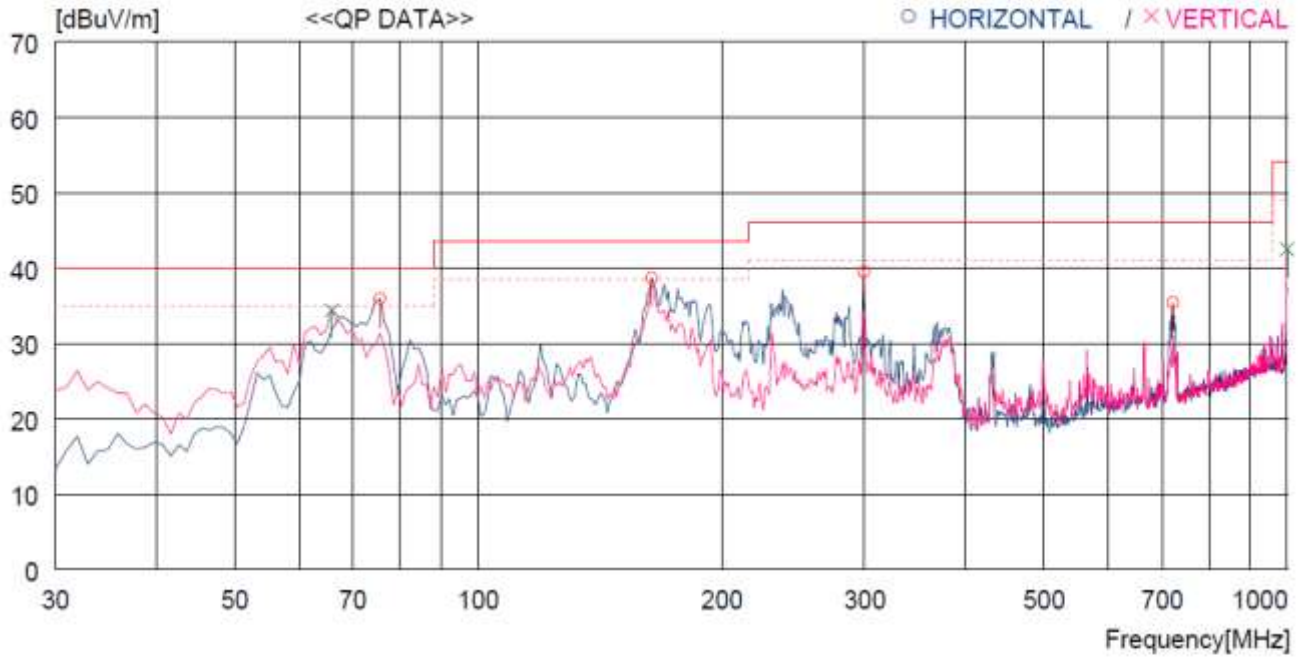

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	75.590	58.0	8.5	2.5	33.1	35.9	40.0	4.1	200	359
2	163.860	59.1	8.8	3.7	33.0	38.6	43.5	4.9	200	40
3	299.660	53.6	13.6	5.1	32.9	39.4	46.0	6.6	100	327
4	722.574	40.5	19.9	8.2	33.2	35.4	46.0	10.6	100	187
----- Vertical -----										
5	65.890	53.9	11.2	2.3	33.0	34.4	40.0	5.6	100	359
6	999.016	41.8	22.6	9.7	31.6	42.5	54.0	11.5	100	359

Tested by: Hyung-Kwon, Oh / Engineer

13.4.2 Test data for Below 30 MHz

- . Test Date : September 28, 2015
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								

13.4.3 Test data for above 1 GHz

- . Test Date : September 28, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								




Tested by: Hyung-Kwon, Oh / Engineer

13.5 Test data for 2 Mbps

13.5.1 Test data for 30 MHz ~ 1 000 MHz

- Test Date : September 28, 2015
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

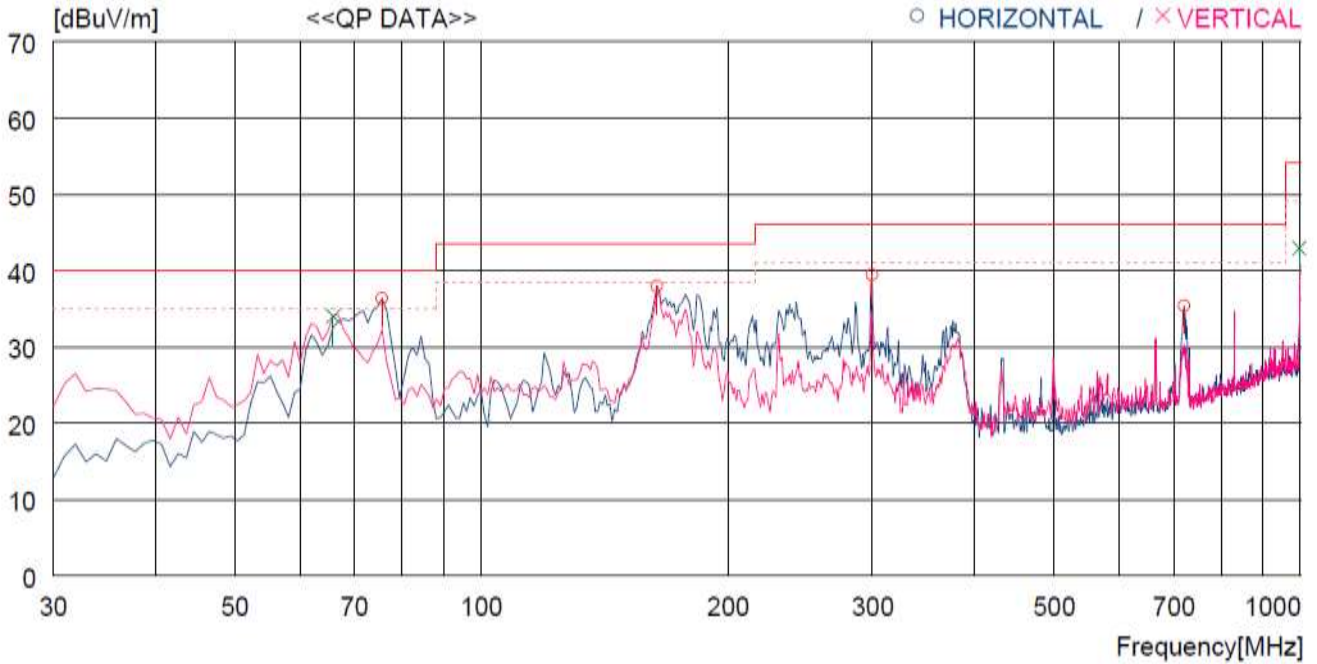

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	75.590	58.4	8.5	2.5	33.1	36.3	40.0	3.7	300	0
2	163.860	58.4	8.8	3.7	33.0	37.9	43.5	5.6	200	359
3	299.660	53.6	13.6	5.1	32.9	39.4	46.0	6.6	100	0
4	720.634	40.5	19.9	8.2	33.2	35.4	46.0	10.6	100	166
----- Vertical -----										
5	65.890	53.5	11.2	2.3	33.0	34.0	40.0	6.0	100	237
6	996.106	42.2	22.6	9.7	31.6	42.9	54.0	11.1	100	359

Tested by: Hyung-Kwon, Oh / Engineer

13.5.2 Test data for Below 30 MHz

- . Test Date : September 28, 2015
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								

13.5.3 Test data for above 1 GHz

- . Test Date : September 28, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								




Tested by: Hyung-Kwon, Oh / Engineer

13.6 Test data for 3 Mbps

13.6.1 Test data for 30 MHz ~ 1 000 MHz

- . Test Date : September 28, 2015
- . Resolution bandwidth : 120 kHz
- . Frequency range : 30 MHz ~ 1 000 MHz
- . Measurement distance : 3 m

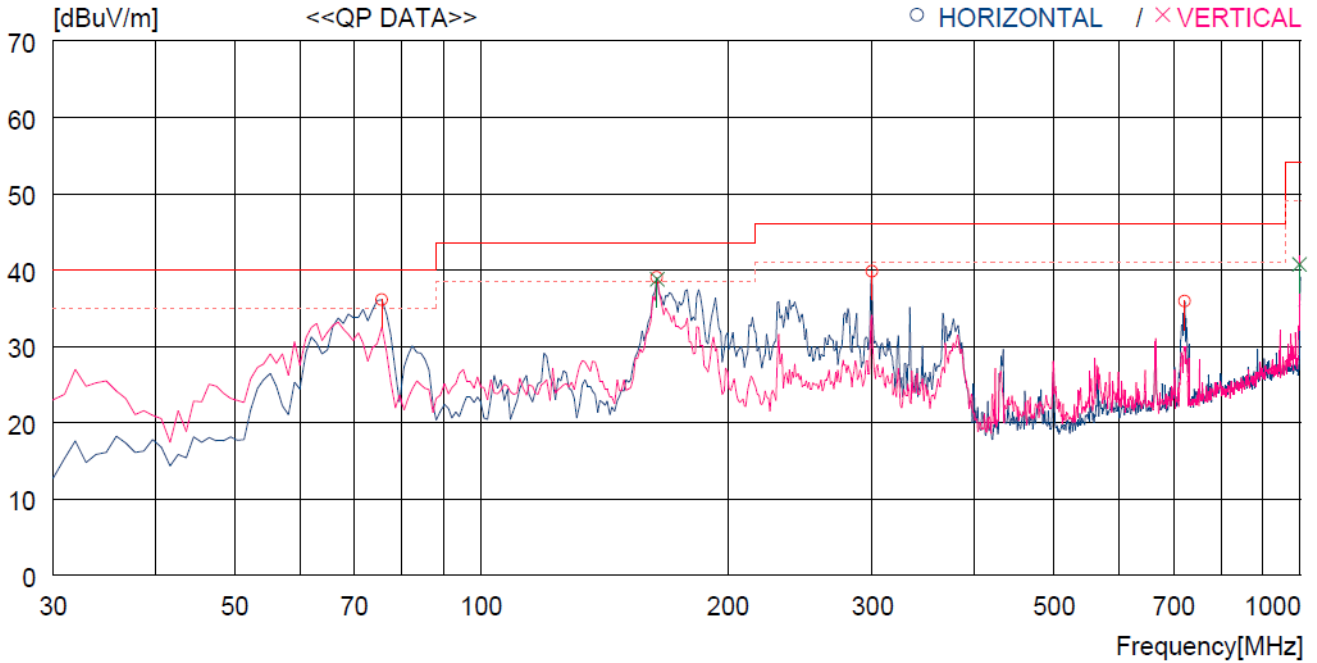

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	75.590	58.2	8.5	2.5	33.1	36.1	40.0	3.9	200	359
2	163.860	59.5	8.8	3.7	33.0	39.0	43.5	4.5	200	74
3	299.660	54.0	13.6	5.1	32.9	39.8	46.0	6.2	100	348
4	722.574	41.0	19.9	8.2	33.2	35.9	46.0	10.1	100	0
----- Vertical -----										
5	163.860	59.3	8.8	3.7	33.0	38.8	43.5	4.7	100	166
6	997.076	40.0	22.6	9.7	31.6	40.7	54.0	13.3	100	180

Tested by: Hyung-Kwon, Oh / Engineer

13.6.2 Test data for Below 30 MHz

- . Test Date : September 28, 2015
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								

13.6.3 Test data for above 1 GHz

- . Test Date : September 28, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								



Tested by: Hyung-Kwon, Oh / Engineer

14. CONDUCTED EMISSION TEST

14.1 Operating environment

Temperature : 21.6 °C
 Relative humidity : 43.0 % R.H.

14.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


14.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESPI	Rohde & Schwarz	Test Receiver	101012	Nov. 03, 2014 (1Y)
□ - ESHS10	Rohde & Schwarz	Test Receiver	834467/007	Apr. 29, 2015 (1Y)
□ - NSLK8128	Schwarzbeck	AMN	8128-216	Apr. 06, 2015 (1Y)
■ - NSLK8126	Schwarzbeck	AMN	8126-404	Apr. 29, 2015 (1Y)
□ - 3825/2	EMCO	AMN	9109-1869	Apr. 29, 2015 (1Y)
■ - 3825/2	EMCO	AMN	9109-1867	Apr. 29, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


14.4 Test data

- Test Date : September 28, 2015
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

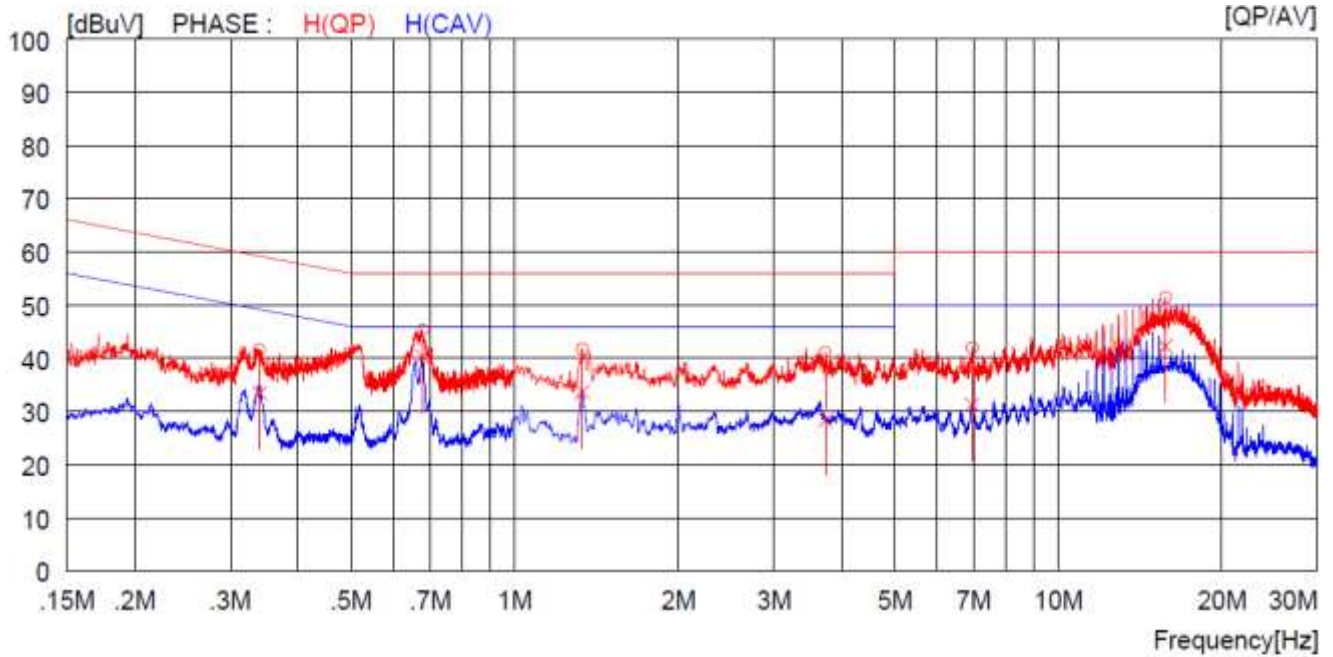

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.34000	31.5	----	10.0	41.5	----	59.2	----	17.7	----	H(QP)
2	0.67700	35.1	----	10.1	45.2	----	56.0	----	10.8	----	H(QP)
3	1.33200	31.6	----	10.1	41.7	----	56.0	----	14.3	----	H(QP)
4	3.73200	30.9	----	10.1	41.0	----	56.0	----	15.0	----	H(QP)
5	6.94500	31.7	----	10.2	41.9	----	60.0	----	18.1	----	H(QP)
6	15.76000	40.9	----	10.5	51.4	----	60.0	----	8.6	----	H(QP)
7	0.34000	----	23.4	10.0	----	33.4	----	49.2	----	15.8	H(CAV)
8	0.67700	----	30.1	10.1	----	40.2	----	46.0	----	5.8	H(CAV)
9	1.33200	----	23.5	10.1	----	33.6	----	46.0	----	12.4	H(CAV)
10	3.73200	----	18.3	10.1	----	28.4	----	46.0	----	17.6	H(CAV)
11	6.94500	----	21.0	10.2	----	31.2	----	50.0	----	18.8	H(CAV)
12	15.76000	----	31.7	10.5	----	42.2	----	50.0	----	7.8	H(CAV)

- Tested Line : NEUTRAL LINE

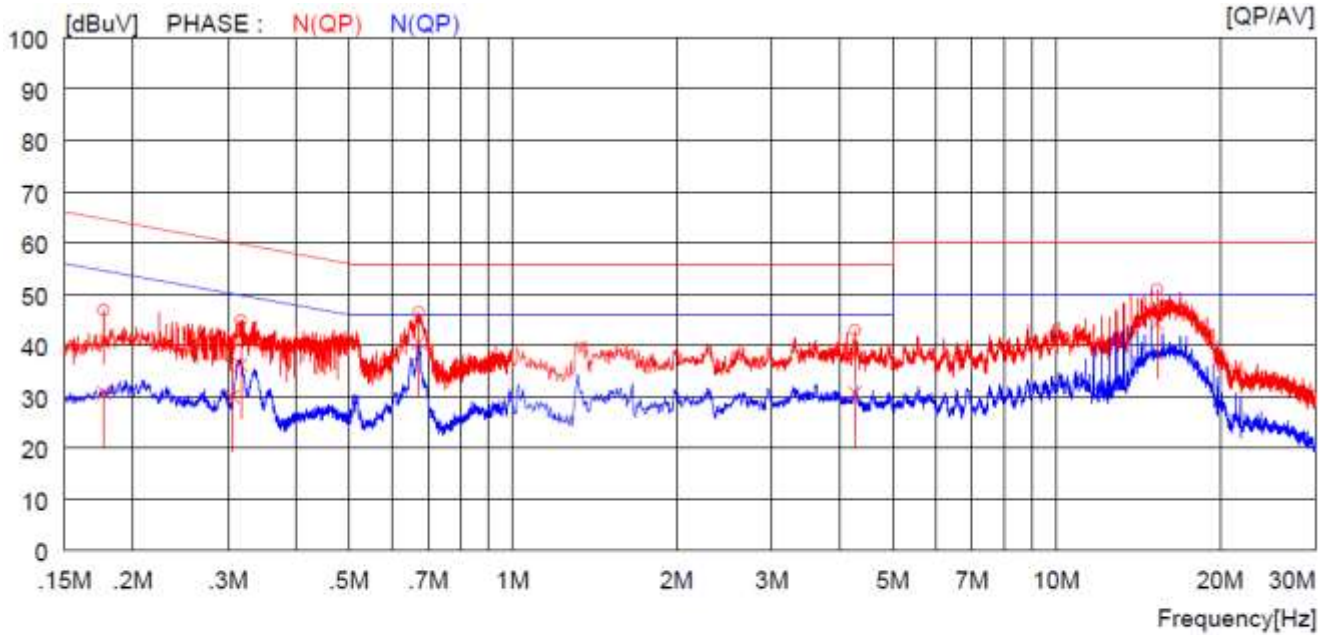

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.17700	37.0	----	9.9	46.9	----	64.6	----	17.7	----	N{QP}
2	0.30500	30.4	----	10.0	40.4	----	60.1	----	19.7	----	N{QP}
3	0.31600	34.9	----	10.0	44.9	----	59.8	----	14.9	----	N{QP}
4	0.67200	36.4	----	10.1	46.5	----	56.0	----	9.5	----	N{QP}
5	4.26000	32.8	----	10.1	42.9	----	56.0	----	13.1	----	N{QP}
6	15.32000	40.4	----	10.5	50.9	----	60.0	----	9.1	----	N{QP}
7	0.17700	----	20.8	9.9	----	30.7	----	54.6	----	23.9	N{CAV}
8	0.30500	----	20.0	10.0	----	30.0	----	50.1	----	20.1	N{CAV}
9	0.31600	----	26.2	10.0	----	36.2	----	49.8	----	13.6	N{CAV}
10	0.67200	----	30.5	10.1	----	40.6	----	46.0	----	5.4	N{CAV}
11	4.26000	----	20.6	10.1	----	30.7	----	46.0	----	15.3	N{CAV}
12	15.32000	----	33.8	10.5	----	44.3	----	50.0	----	5.7	N{CAV}

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Hyung-Kwon, Oh / Engineer