

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W161R-D011
AGR No. : A15DA-264
Applicant : LG Innotek Co., Ltd.
Address : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731 Korea
Manufacturer : LG Innotek Co., Ltd.
Address : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731 Korea
Type of Equipment : Wi-Fi/BT Combo module
FCC ID. : YZP-TWCMK007D
Model Name : TWCM-K007D
Serial number : N/A
Total page of Report : 34 pages (including this page)
Date of Incoming : December 28, 2015
Date of issue : January 25, 2016

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by: 

Ki-Hong, Nam / Asst, Chief Engineer
ONETECH Corp.

Approved by: 

Sung-Ik, Han / Managing Director
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	9
4. EUT MODIFICATIONS.....	9
5. SYSTEM TEST CONFIGURATION	10
5.1 JUSTIFICATION.....	10
5.2 PERIPHERAL EQUIPMENT	10
5.3 CONFIGURATION OF TEST SYSTEM.....	10
5.4 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	11
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	11
6.2 GENERAL RADIATED EMISSIONS TESTS	11
7. MIMIMUM 6 DB BANDWIDTH	12
7.1 OPERATING ENVIRONMENT	12
7.2 TEST SET-UP	12
7.3 TEST EQUIPMENT USED.....	12
7.4 TEST DATA.....	13
8. MAXIMUM PEAK OUTPUT POWER	15
8.1 OPERATING ENVIRONMENT	15
8.2 TEST SET-UP	15
8.3 TEST EQUIPMENT USED.....	15
8.4 TEST DATA.....	16

9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	18
9.1 OPERATING ENVIRONMENT	18
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	18
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	18
9.4 TEST EQUIPMENT USED.....	18
9.5 TEST DATA FOR CONDUCTED EMISSION	19
9.6 TEST DATA FOR RADIATED EMISSION.....	24
<i>9.6.1 Radiated Emission which fall in the Restricted Band.....</i>	<i>24</i>
<i>9.6.2 Spurious & Harmonic Radiated Emission.....</i>	<i>25</i>
10. PEAK POWER SPECTRAL DENSITY	26
10.1 OPERATING ENVIRONMENT	26
10.2 TEST SET-UP	26
10.3 TEST EQUIPMENT USED.....	26
10.4 TEST DATA.....	27
11. RADIATED EMISSION TEST	29
11.1 OPERATING ENVIRONMENT	29
11.2 TEST SET-UP	29
11.3 TEST EQUIPMENT USED.....	29
11.4 TEST DATA FOR 30 MHZ ~ 1 000 MHZ	30
11.5 TEST DATA FOR BELOW 30 MHZ	31
11.6 TEST DATA FOR ABOVE 1 GHZ	31
12. CONDUCTED EMISSION TEST.....	32
12.1 OPERATING ENVIRONMENT	32
12.2 TEST SET-UP	32
12.3 TEST EQUIPMENT USED.....	32
12.4 TEST DATA.....	33

Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
W161R-D011	January 25, 2016	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.
 Address : 978-1, Jangduk-dong, Gwangsan-gu, Gwangju, 506-731 Korea
 Contact Person : Inchang, Jeong / Director
 Telephone No. : +82-62-950-0332
 FCC ID : YZP-TWCMK007D
 Model Name : TWCM-K007D
 Serial Number : N/A
 Date : January 25, 2016

EQUIPMENT CLASS	DTS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Modular Transmitter, Wi-Fi/BT Combo module
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 301-14, Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862 Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-666/ T-1842 IC (Industry Canada) – Registration No. Site# 3736-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Innotek Co., Ltd., Model TWCM-K007D (referred to as the EUT in this report) is a Wi-Fi/BT Combo module. Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Wi-Fi/BT Combo module			
FREQUENCY RANGE	Bluetooth	2 402 MHz ~ 2 480 MHz		
	Bluetooth LE	2 402 MHz ~ 2 480 MHz		
	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20)) 2 422 MHz ~ 2 452 MHz (802.11n(HT40))		
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11n(HT20)/ac20)	
			5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac40)	
			5 210 MHz (802.11ac80)	
		5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11n(HT20)/ac20)	
			5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac40)	
5 775 MHz (802.11ac80)				

MAX. RF OUTPUT POWER	Bluetooth		1 Mbps	5.94 dBm	
			2 Mbps	6.77 dBm	
			3 Mbps	7.07 dBm	
	Bluetooth LE		1.43 dBm		
	WLAN 2.4 GHz Band		Ant.0	Wi-Fi 802.11b (12.72 dBm) Wi-Fi 802.11g (11.75 dBm) Wi-Fi 802.11n_20 MHz (10.54 dBm) Wi-Fi 802.11n_40 MHz (8.69 dBm)	
				Ant.1	Wi-Fi 802.11b (12.92 dBm) Wi-Fi 802.11g (11.75 dBm) Wi-Fi 802.11n_20 MHz (10.82 dBm) Wi-Fi 802.11n_40 MHz (8.50 dBm)
	WLAN 5 GHz Band		Ant.0		5 150 MHz ~ 5 250 MHz Band Wi-Fi 802.11a (10.00 dBm) Wi-Fi 802.11n_20 MHz (9.87 dBm) Wi-Fi 802.11n_40 MHz (8.56 dBm) Wi-Fi 802.11ac20 MHz (9.77 dBm) Wi-Fi 802.11ac40 MHz (9.49 dBm) Wi-Fi 802.11ac80 MHz (8.04 dBm)
				5 725 MHz ~ 5 850 MHz Band Wi-Fi 802.11a (9.22 dBm) Wi-Fi 802.11n_20 MHz (9.09 dBm) Wi-Fi 802.11n_40 MHz (7.00 dBm) Wi-Fi 802.11ac20 MHz (9.31 dBm) Wi-Fi 802.11ac40 MHz (8.12 dBm) Wi-Fi 802.11ac80 MHz (7.40 dBm)	
			Ant.1	5 150 MHz ~ 5 250 MHz Band Wi-Fi 802.11a (9.32 dBm) Wi-Fi 802.11n_20 MHz (9.01 dBm) Wi-Fi 802.11n_40 MHz (7.57 dBm) Wi-Fi 802.11ac20 MHz (9.18 dBm) Wi-Fi 802.11ac40 MHz (8.83 dBm) Wi-Fi 802.11ac80 MHz (7.16 dBm)	
				5 725 MHz ~ 5 850 MHz Band Wi-Fi 802.11a (8.49 dBm) Wi-Fi 802.11n_20 MHz (8.45 dBm) Wi-Fi 802.11n_40 MHz (7.12 dBm) Wi-Fi 802.11ac20 MHz (8.49 dBm) Wi-Fi 802.11ac40 MHz (7.39 dBm) Wi-Fi 802.11ac80 MHz (6.54 dBm)	

MODULATION TYPE	Bluetooth	GFSK for 1 Mbps, DQPSK for 2 Mbps, 8-DPSK for 3 Mbps
	Bluetooth LE	GFSK
	WLAN 2.4 GHz Band	DSSS Modulation(DBPSK/DQPSK/CCK)
	WLAN 5 GHz Band	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
Antenna Gain	2.4 GHz Band [BT(BDR / EDR / LE)]	0.42 dBi
	2.4 GHz Band [WLAN]	Antenna 0 : 1.23 dBi
		Antenna 1 : 1.21 dBi
	5 GHz Band [5 150 MHz ~ 5 250 MHz Band]	Antenna 0 : 1.71 dBi
		Antenna 1 : 1.39 dBi
	5 GHz Band [5 725 MHz ~ 5 850 MHz Band]	Antenna 0 : 1.10 dBi
		Antenna 1 : 0.71 dBi
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	40 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Innotek Co., Ltd.	WiFi+BT MODULE	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
TWCM-K007D	LG Innotek Co., Ltd.	Wi-Fi/BT Combo module (EUT)	Notebook PC
PP11L	DELL	Notebook PC	EUT

5.3 Configuration of Test System

Line Conducted Test: The jig board of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.
The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.4 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is WLAN PIFA antenna and Bluetooth/BLE PIFA antenna, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MIMIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 21.4 °C
 Relative humidity : 45.1 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

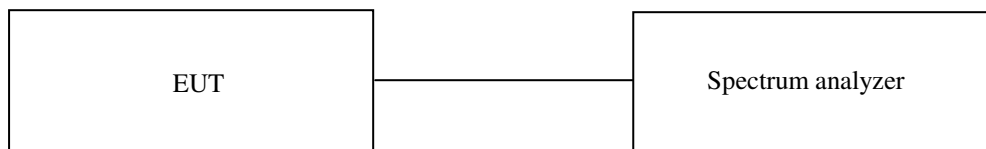

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


7.4 Test data


- Test Date : December 29, 2015
- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (kHz)	LIMIT (kHz)	Margin (kHz)
Low	2 402	714.30	500	214.30
Middle	2 440	714.30	500	214.30
High	2 480	714.30	500	214.30


Remark. Margin = Measured Value - Limit

Tested by: Tae-Ho, Kim / Senior Engineer

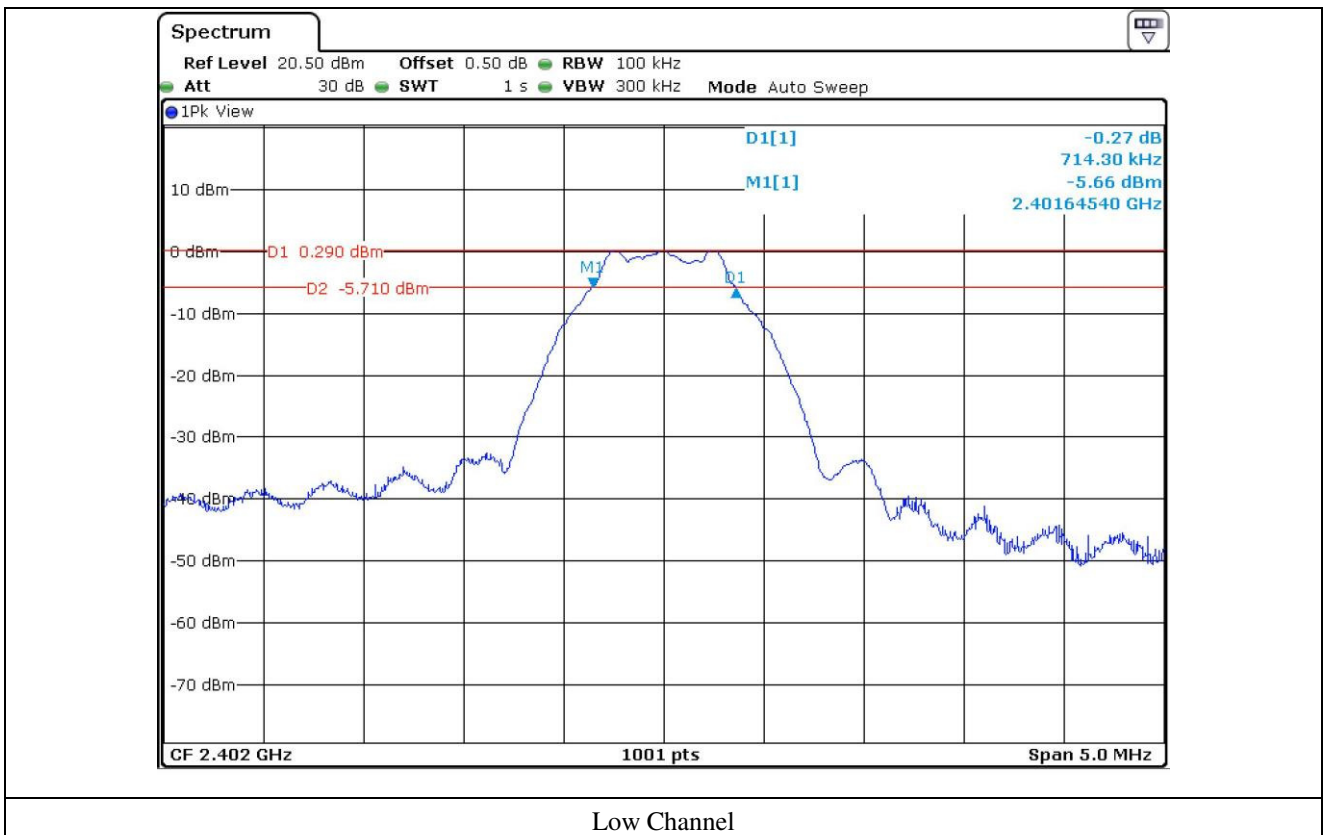

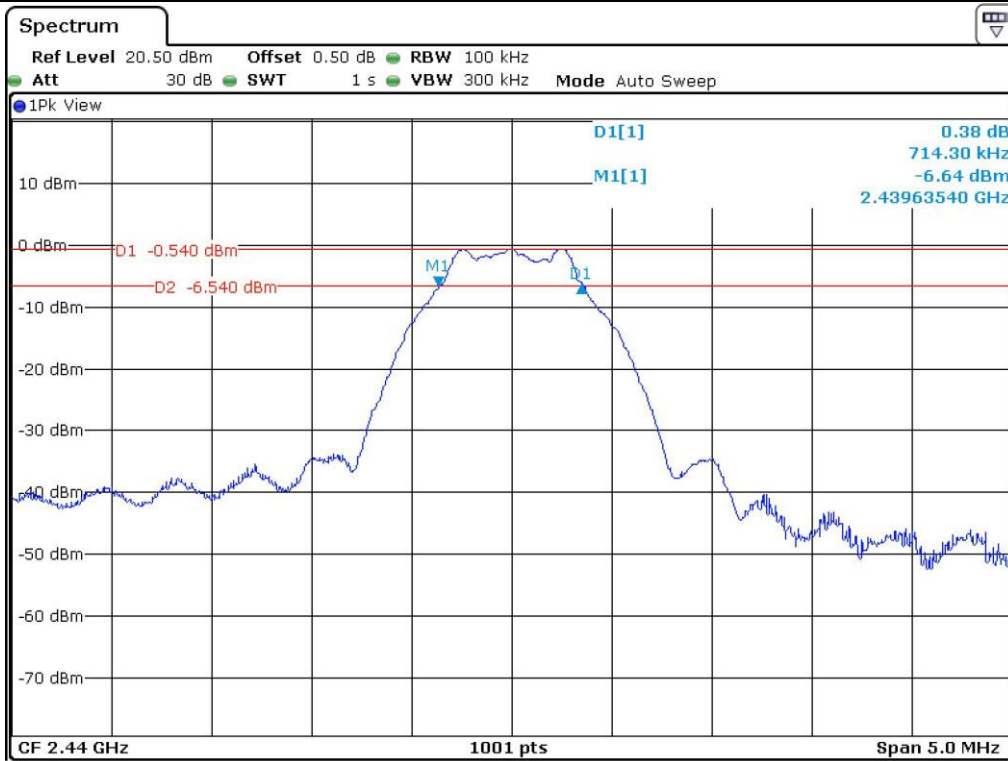

Middle Channel

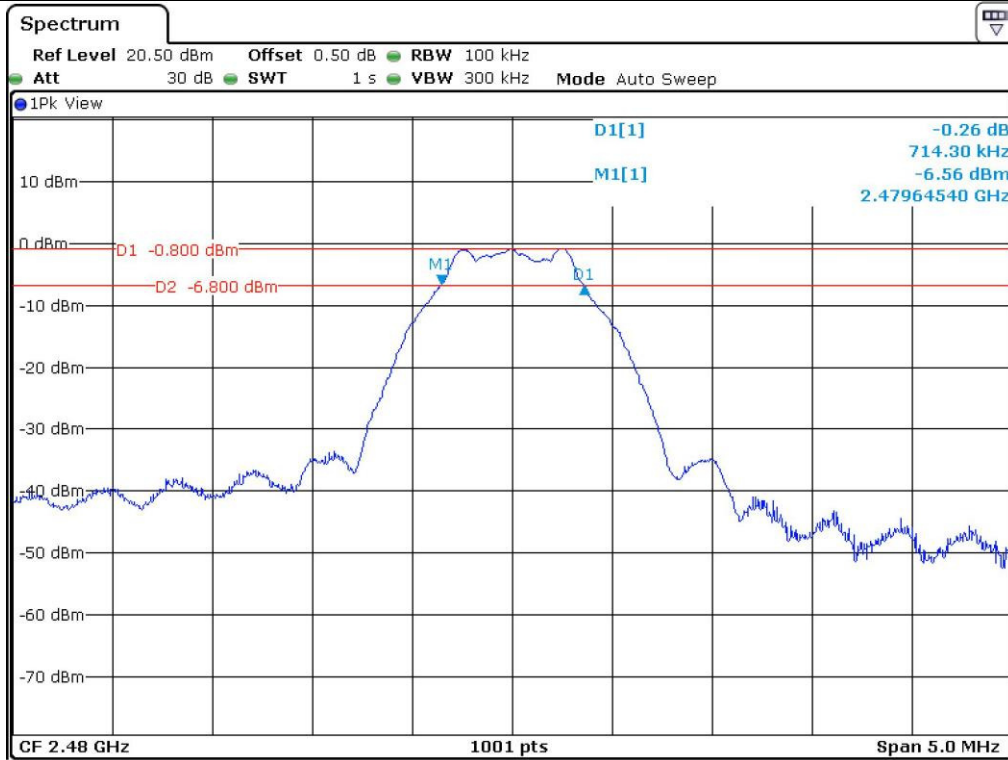

High Channel


8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment

Temperature : 21.4 °C
 Relative humidity : 45.1 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz, the video bandwidth is set to 3 times the resolution bandwidth.

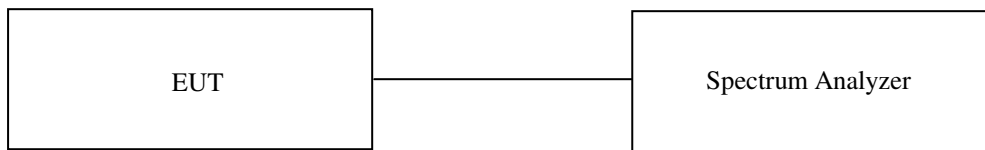

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data


- Test Date : December 29, 2015
- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	1.43	30.00	28.57
MIDDLE	2 440	0.60	30.00	29.40
HIGH	2 480	0.35	30.00	29.65


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Tae-Ho, Kim / Senior Engineer

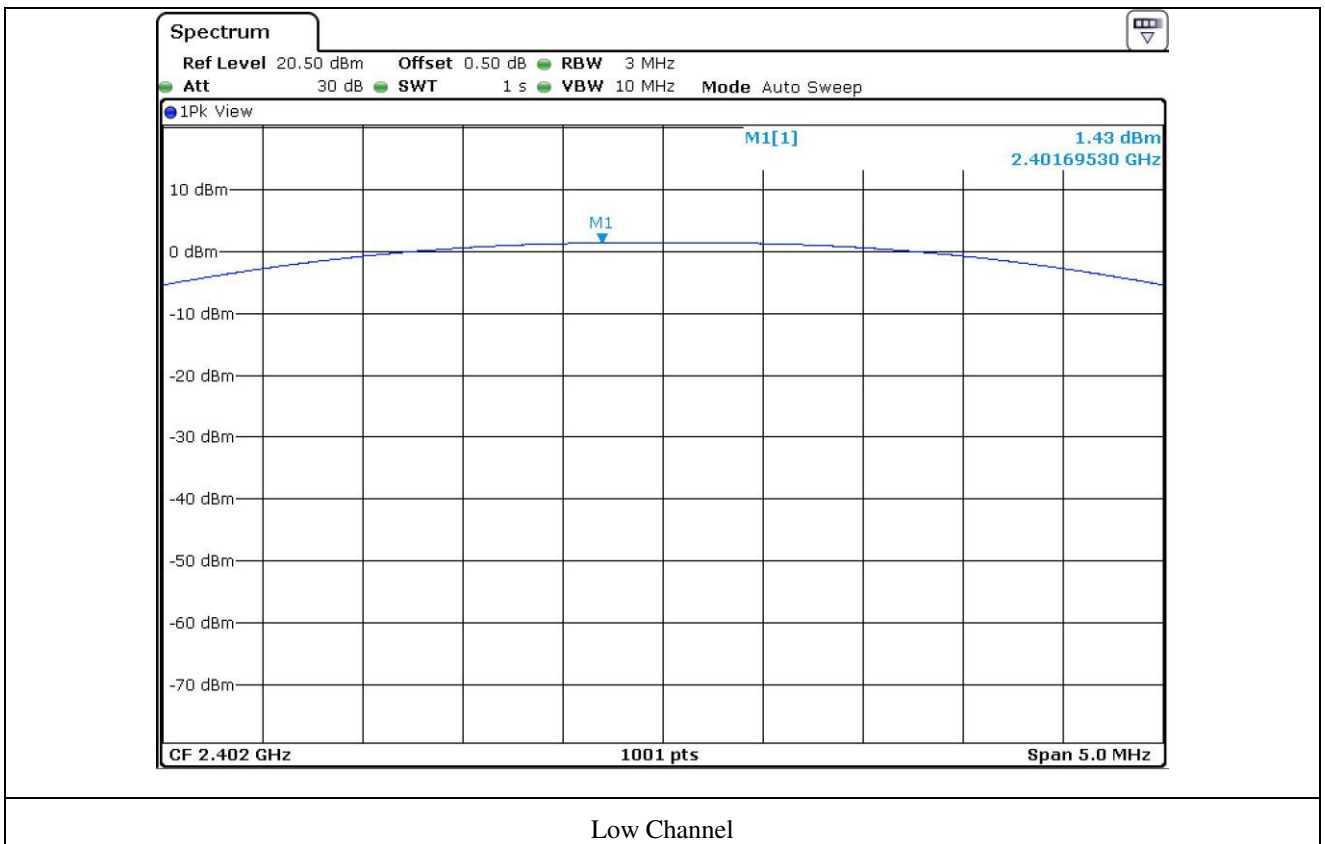

Low Channel

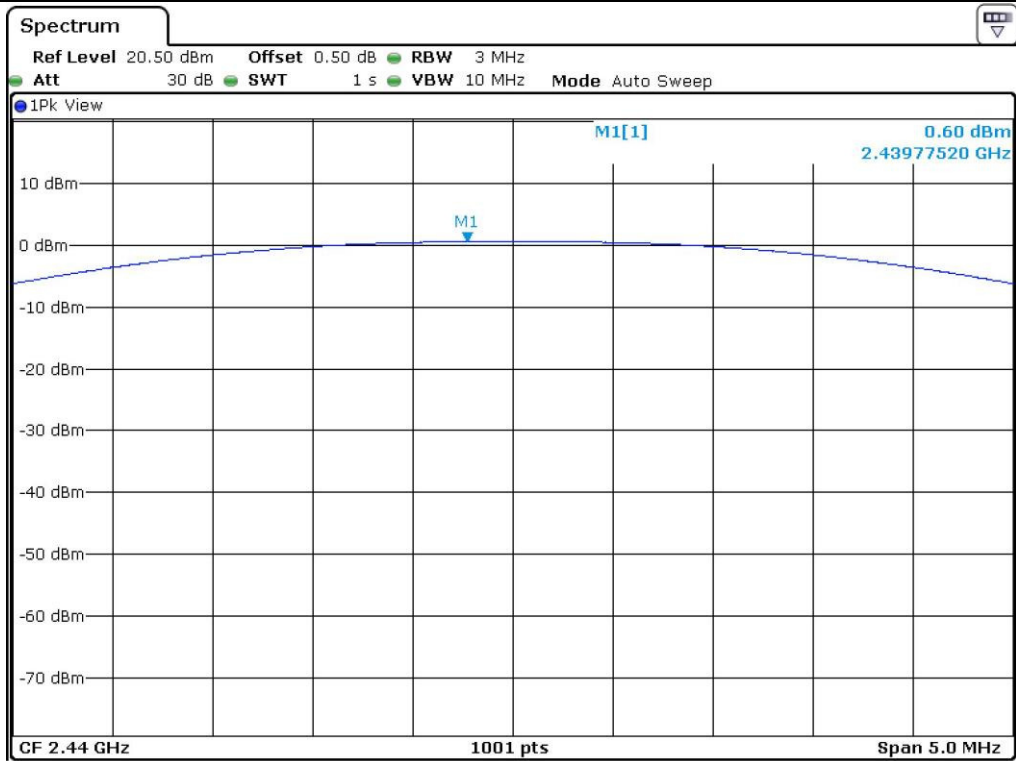

Middle Channel

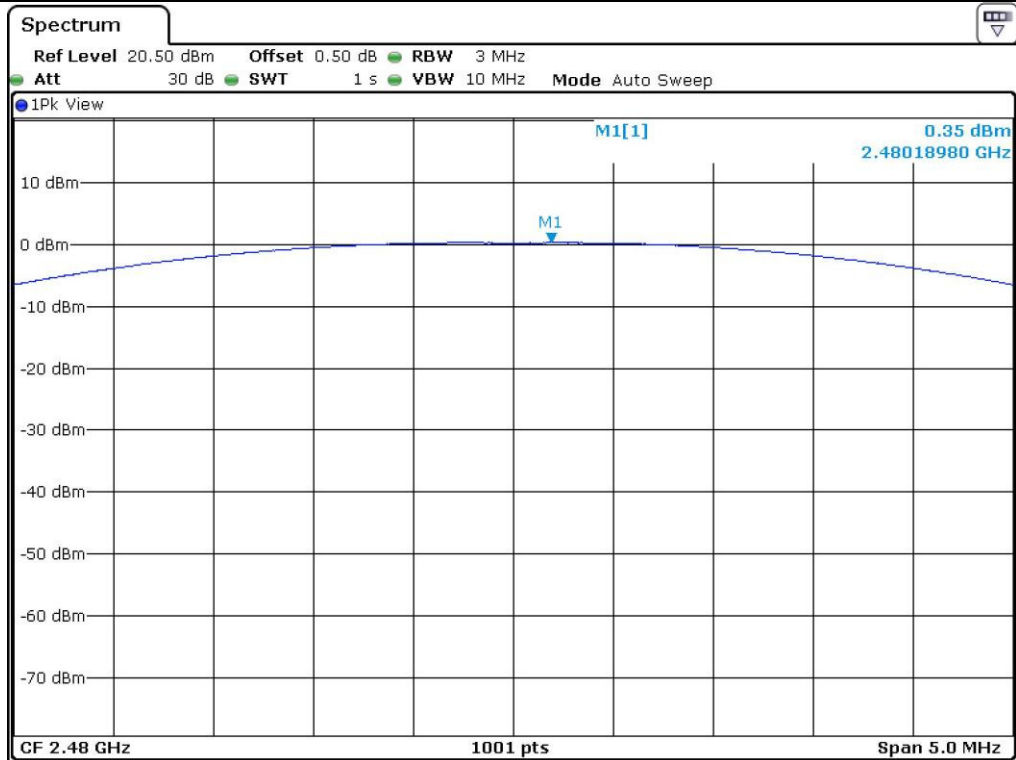

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 21.6 °C
 Relative humidity : 43.0 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

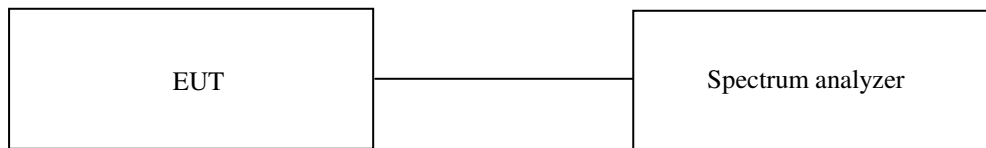

9.3 Test set-up for radiated measurement

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 29, 2015 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 29, 2015 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	10041	Nov. 23, 2015 (1Y)
■ - DT3000	Innco System	Turn Table	930611	N/A
■ - MA4000-EP	Innco System	Antenna Master	3320611	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Jul. 10, 2014 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Apr. 30, 2015 (2Y)

All test equipment used is calibrated on a regular basis.


9.5 Test data for conducted emission

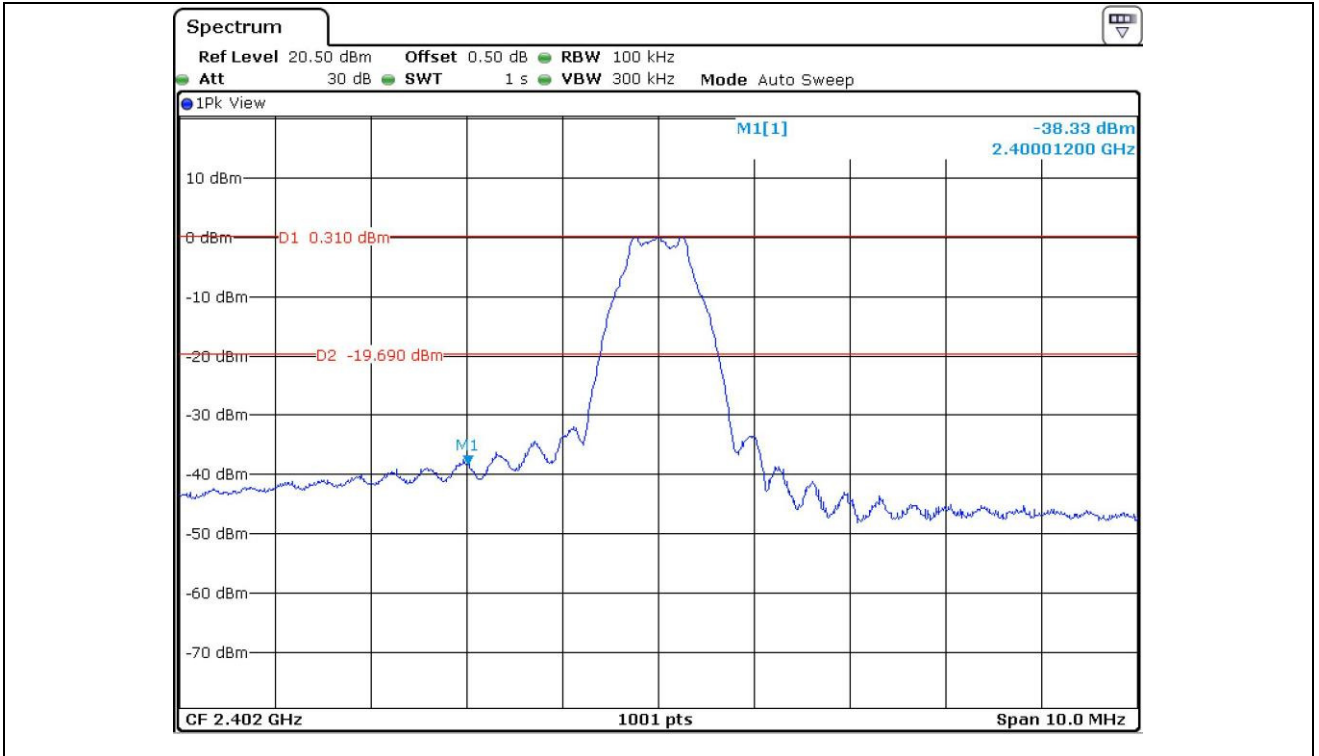


Low Channel

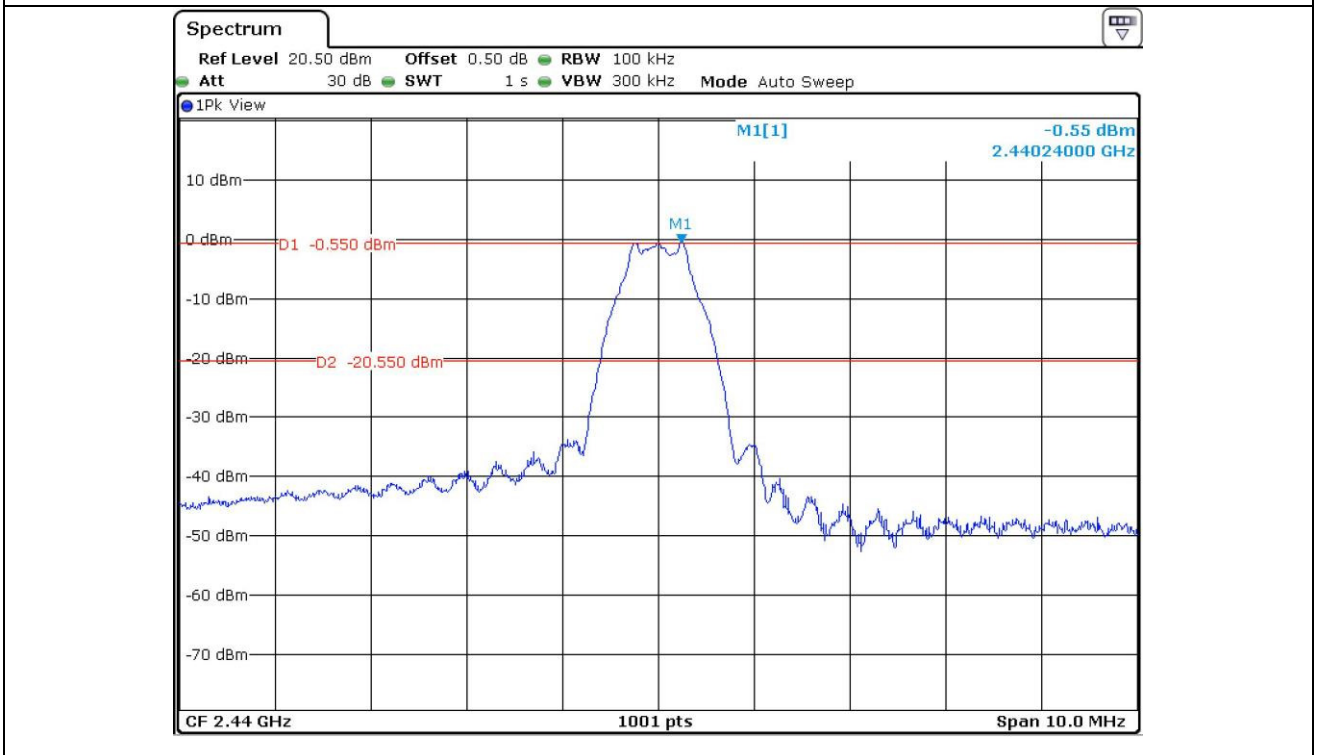


Middle Channel

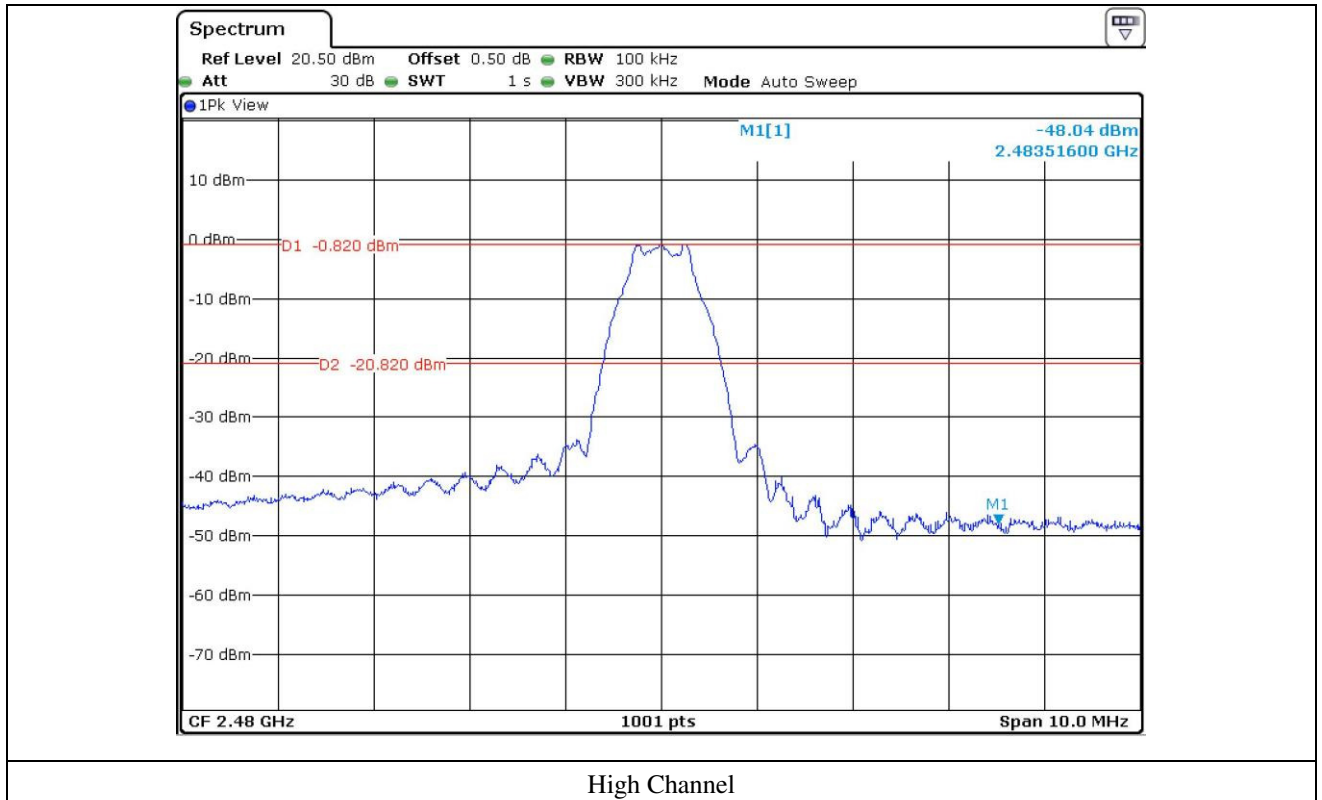


High Channel

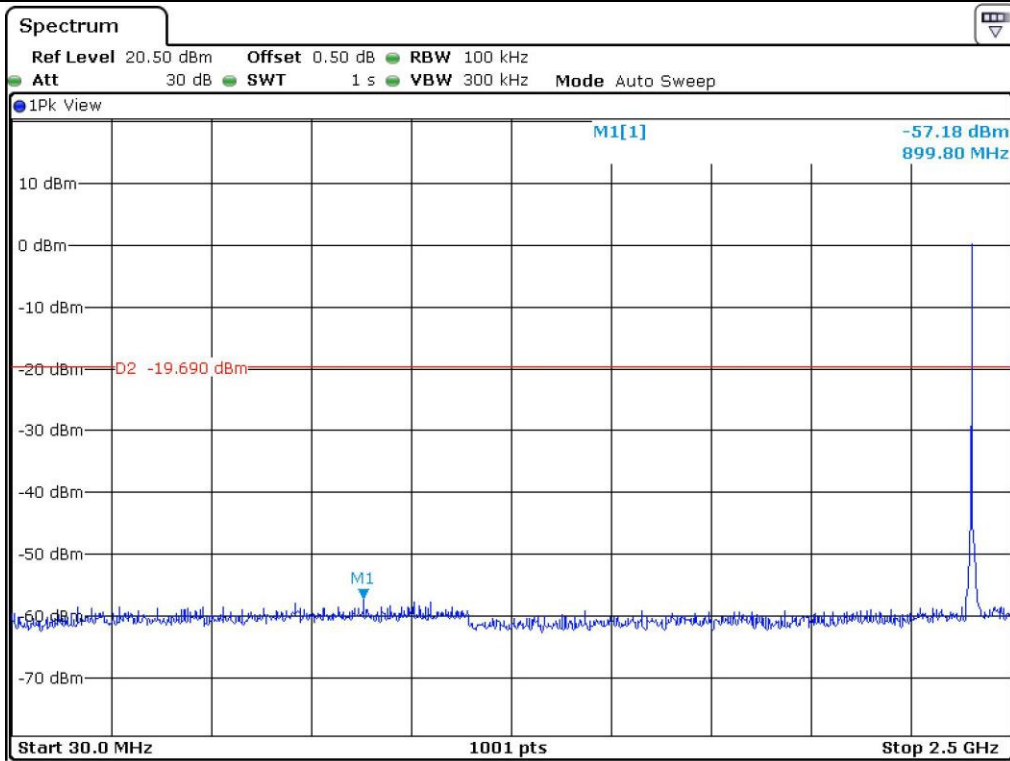


Low Channel

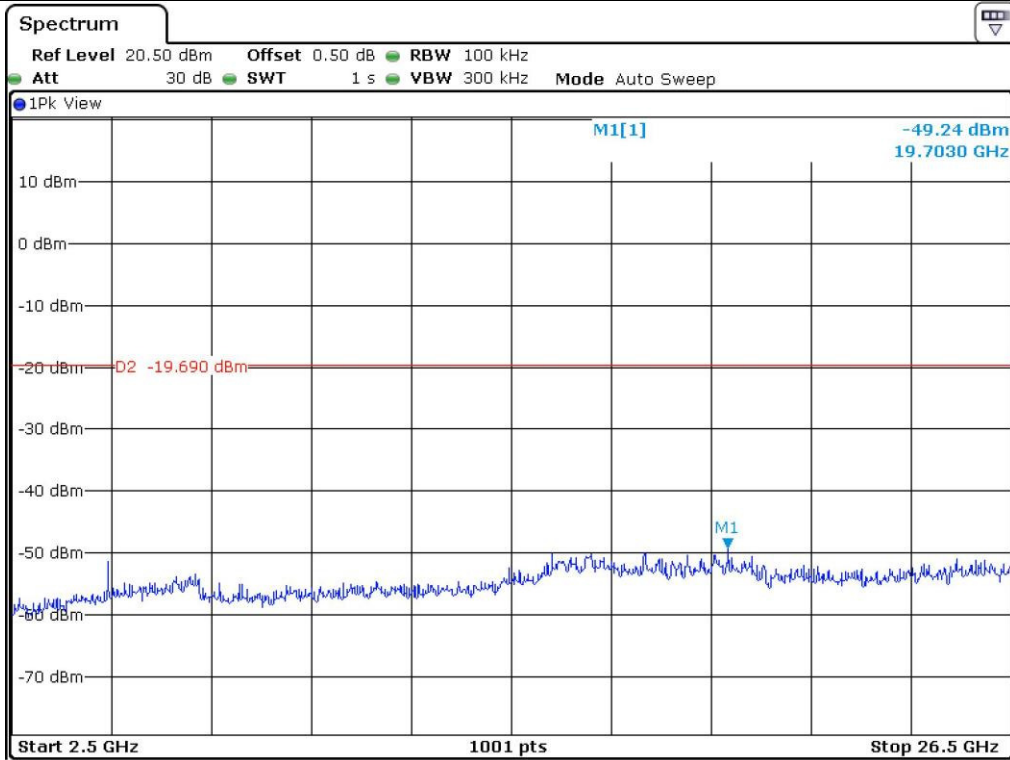


Low Channel

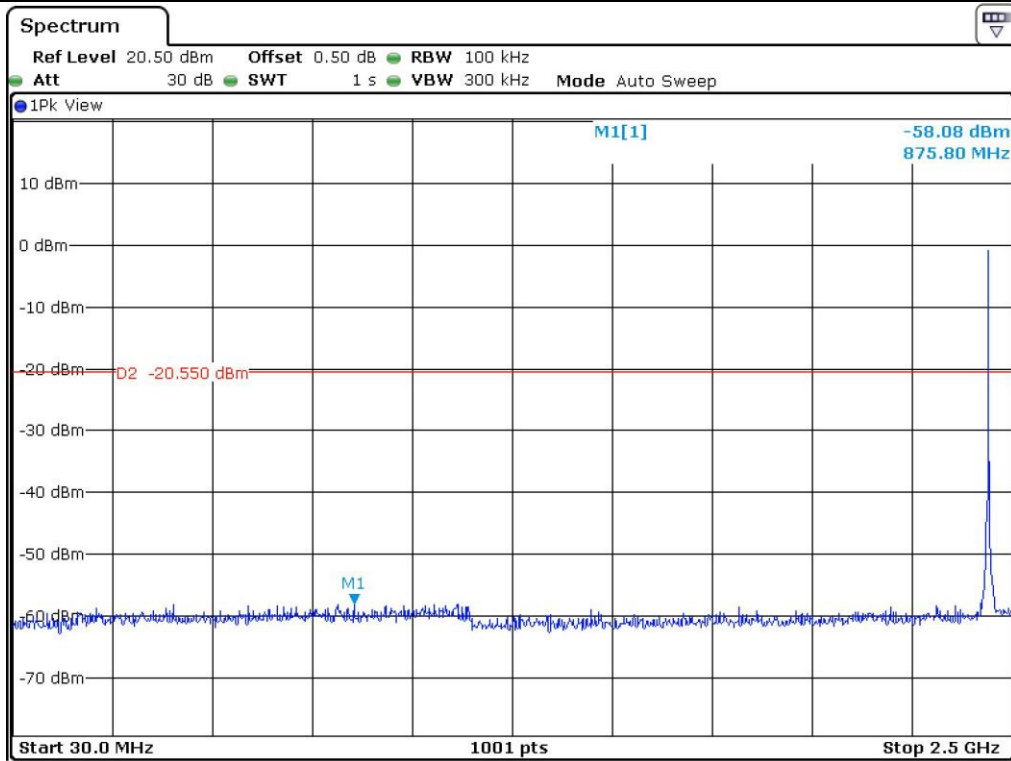


Middle Channel

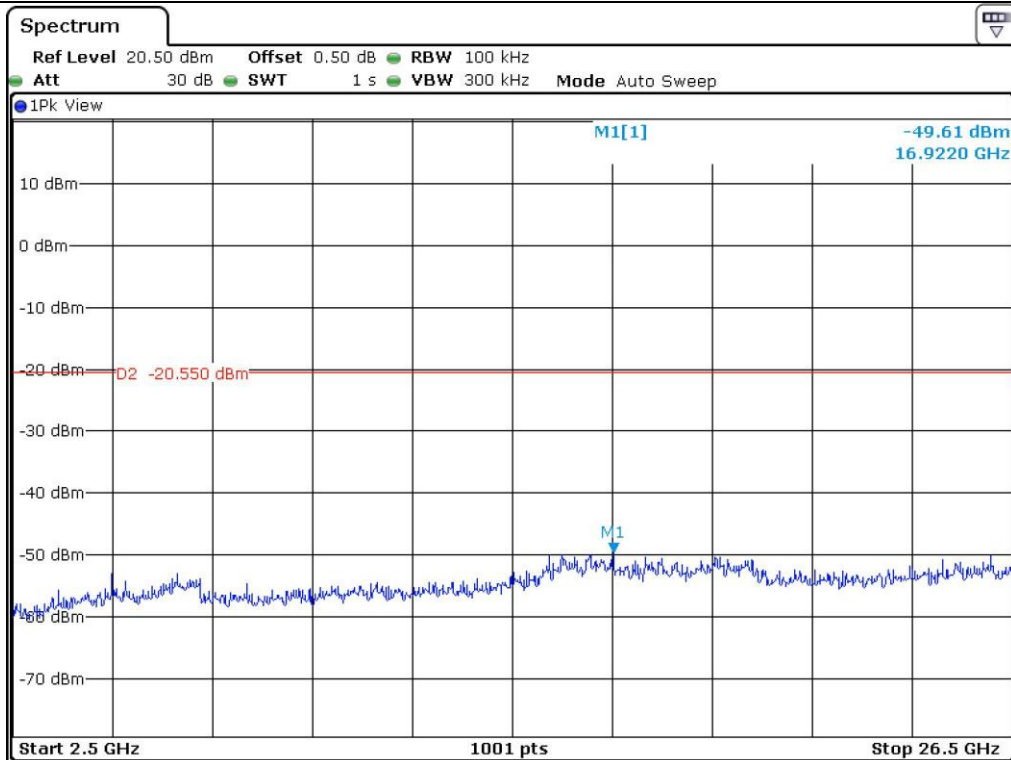

Middle Channel

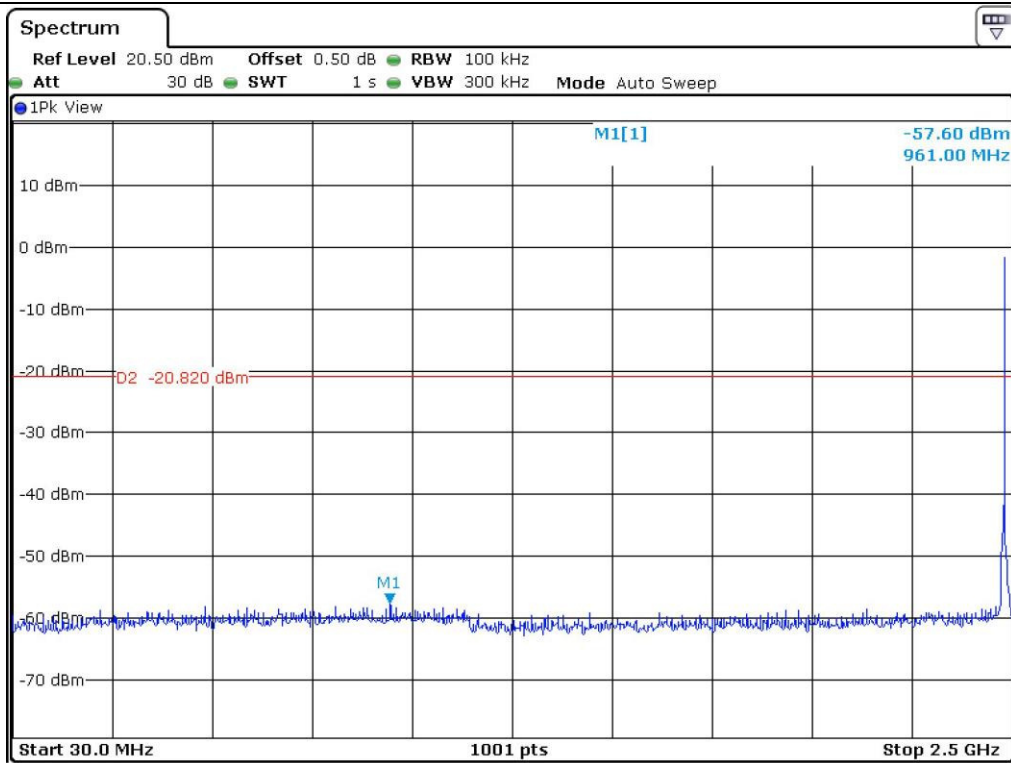

High Channel

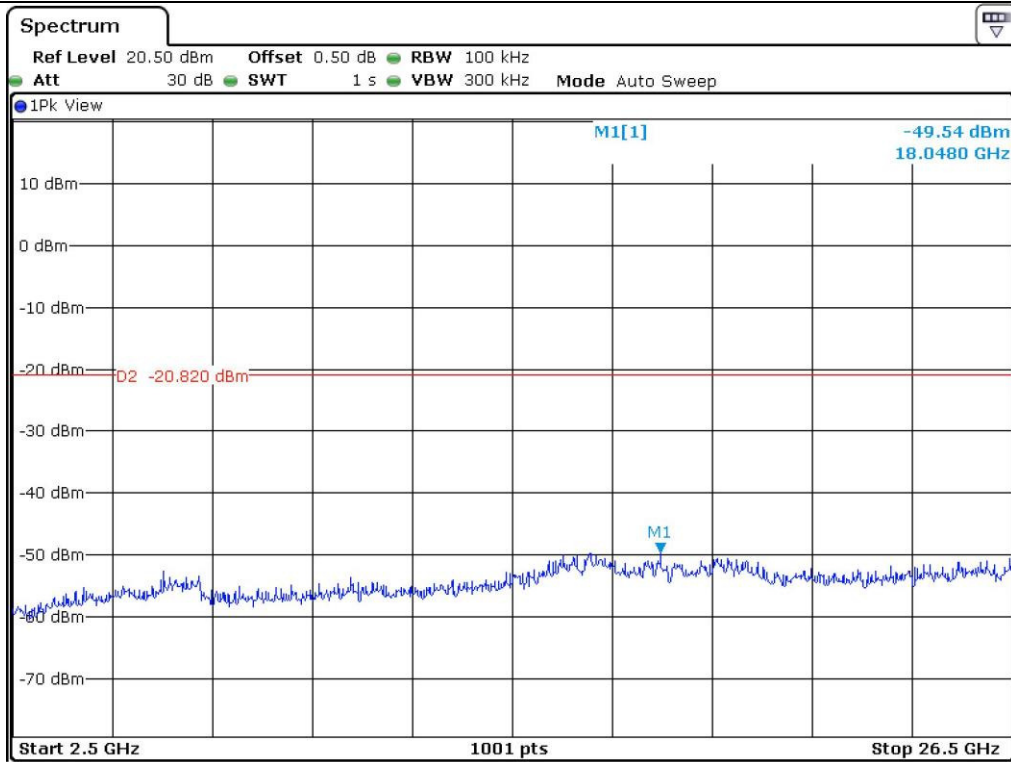

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- Test Date : December 29, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	40.21	Peak	H	27.10	7.50	43.00	31.17	74.00	42.83
	29.88	Average	H				20.34	54.00	33.66
	40.35	Peak	V				32.68	74.00	41.32
	30.06	Average	V				22.56	54.00	31.44
Test Data for Low Channel									
2 400.00	51.23	Peak	H	27.10	7.50	43.00	46.67	74.00	27.33
	38.61	Average	H				34.43	54.00	19.57
	50.66	Peak	V				46.73	74.00	27.27
	38.35	Average	V				34.77	54.00	19.23
Test Data for High Channel									
2 483.50	40.36	Peak	H	27.10	7.50	43.00	33.12	74.00	40.88
	30.18	Average	H				22.85	54.00	31.15
	40.56	Peak	V				34.35	74.00	39.65
	30.39	Average	V				24.42	54.00	29.58

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



Tested by: Tae-Ho, Kim / Senior Engineer

9.6.2 Spurious & Harmonic Radiated Emission

- Test Date : December 29, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	43.26	Peak	H	30.60	11.10	42.50	41.23	74.00	32.77
	34.51	Average	H				32.82	54.00	21.18
	43.06	Peak	V				41.58	74.00	32.42
	34.26	Average	V				33.36	54.00	20.64
Test Data for Middle Channel									
4 880.00	42.98	Peak	H	30.70	11.20	42.50	41.90	74.00	32.10
	34.20	Average	H				33.69	54.00	20.31
	43.22	Peak	V				41.58	74.00	32.42
	33.95	Average	V				33.76	54.00	20.24
Test Data for High Channel									
4 960.00	43.57	Peak	H	30.80	11.30	42.50	41.93	74.00	32.07
	34.62	Average	H				34.10	54.00	19.90
	43.28	Peak	V				41.69	74.00	32.31
	34.18	Average	V				33.85	54.00	20.15

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Tae-Ho, Kim / Senior Engineer


10. PEAK POWER SPECTRAL DENSITY

10.1 Operating environment

Temperature : 21.4 °C
 Relative humidity : 45.1 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 3 kHz, the video bandwidth is set to 3 times the resolution bandwidth.

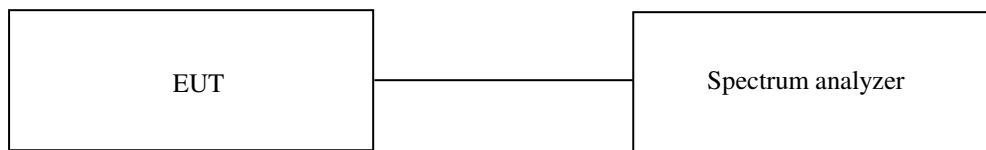

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


10.4 Test data


- Test Date : December 29, 2015
- Test Result : Pass
- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402	-14.41	8.00	22.41
Middle	2 440	-15.40	8.00	23.40
High	2 480	-15.64	8.00	23.64


Remark. Margin = Limit – Measured value

Tested by: Tae-Ho, Kim / Senior Engineer

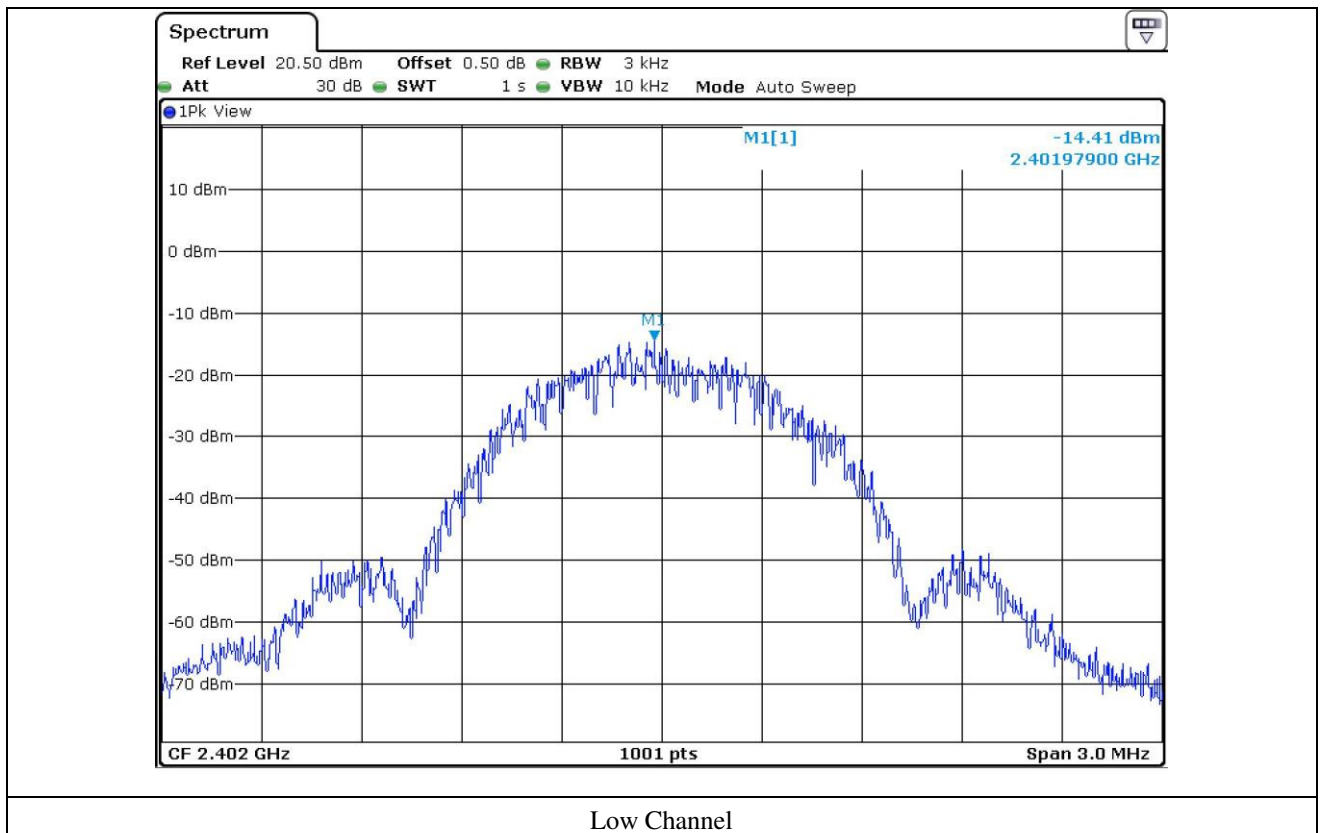

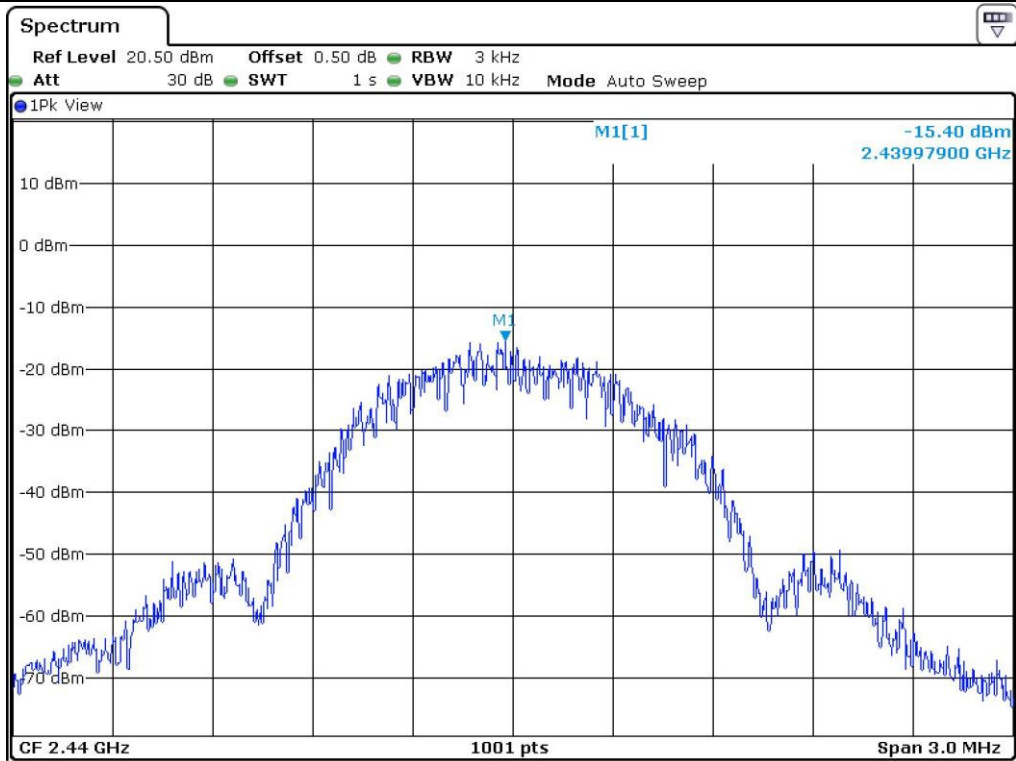

Middle Channel

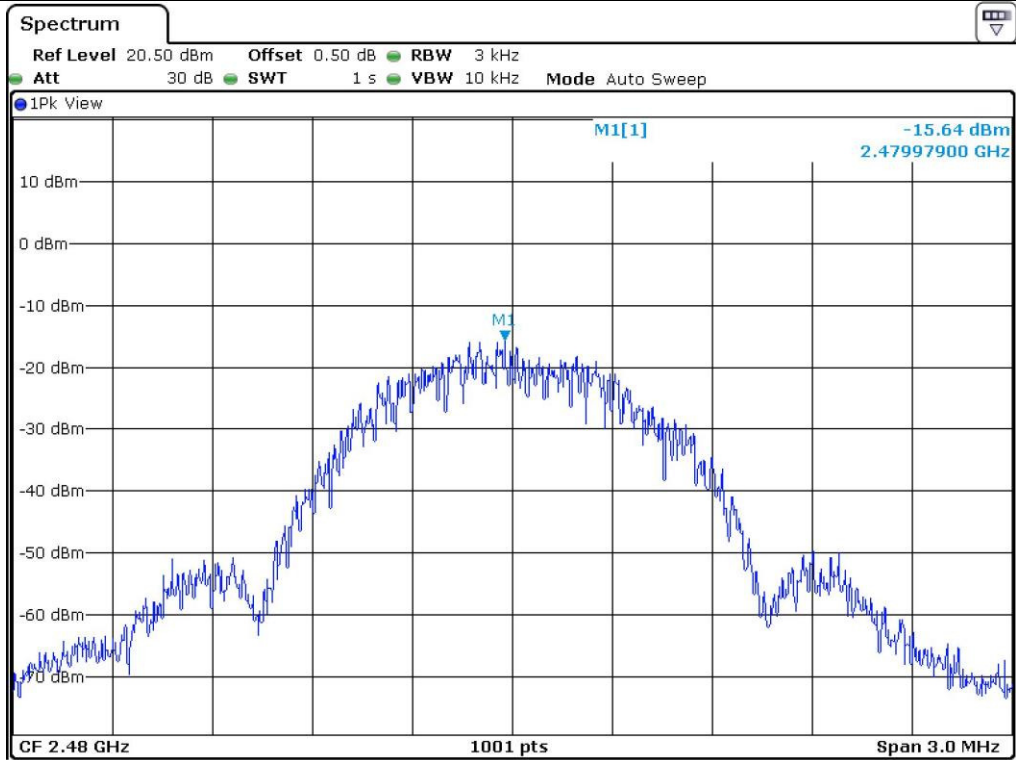

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 21.6 °C
 Relative humidity : 43.0 % R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 m, 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.


11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Jul. 22, 2015 (1Y)
■ - ESCI	Rohde & Schwarz	Test Receiver	101012	Nov. 02, 2015 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 29, 2015 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	10041	Nov. 23, 2015 (1Y)
■ - DT3000	Innco System	Turn Table	930611	N/A
■ - MA4000-EP	Innco System	Antenna Master	3320611	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Jul. 10, 2014 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Apr. 30, 2015 (2Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for 30 MHz ~ 1 000 MHz

- Test Date : December 29, 2015
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

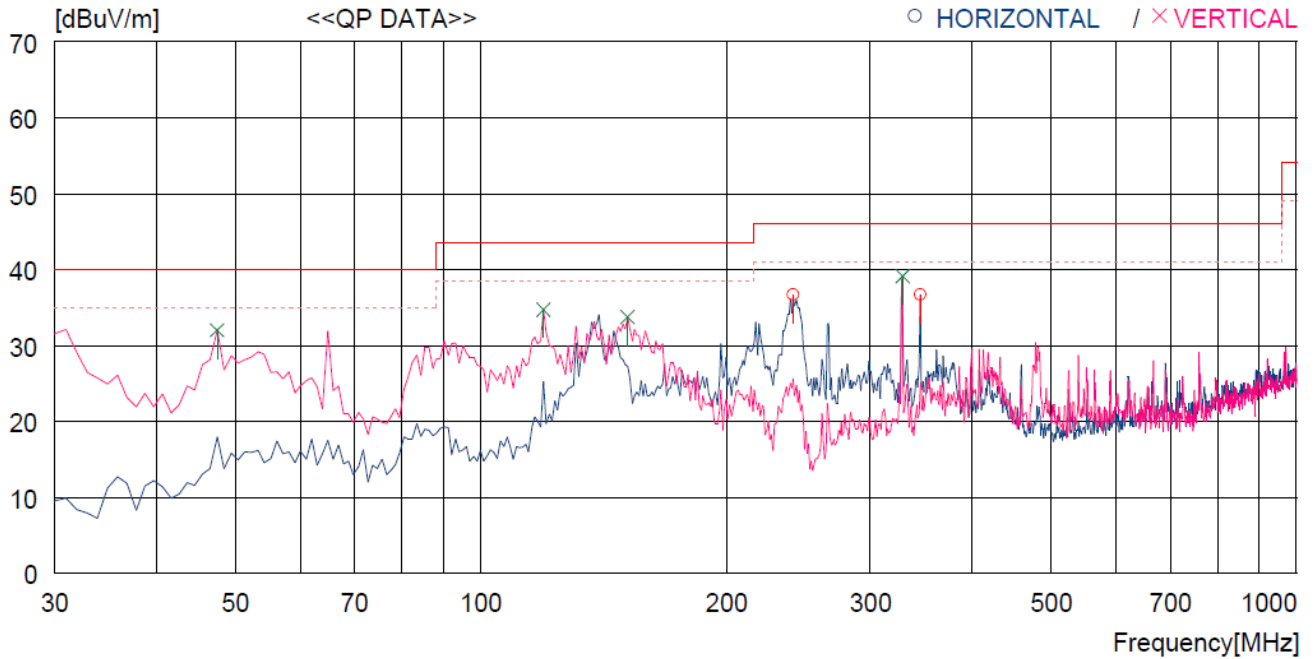

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	241.460	53.3	12.1	4.1	32.8	36.7	46.0	9.3	100	69
2	345.250	49.7	14.6	5.0	32.6	36.7	46.0	9.3	100	2
----- Vertical -----										
3	47.460	49.1	13.8	2.0	32.9	32.0	40.0	8.0	100	2
4	119.240	54.1	10.3	3.5	33.2	34.7	43.5	8.8	100	19
5	151.250	55.0	8.4	3.3	33.0	33.7	43.5	9.8	100	19
6	328.760	52.7	14.2	4.8	32.6	39.1	46.0	6.9	100	19

Tested by: Tae-Ho, Kim / Senior Engineer

11.5 Test data for Below 30 MHz

- . Test Date : December 29, 2015
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								

11.6 Test data for above 1 GHz

- . Test Date : December 29, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								



Tested by: Tae-Ho, Kim / Senior Engineer

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 21.6 °C
 Relative humidity : 43.0 % R.H.

12.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


12.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESPI	Rohde & Schwarz	Test Receiver	101012	Nov. 02, 2015 (1Y)
□ - ESHS10	Rohde & Schwarz	Test Receiver	834467/007	Apr. 29, 2015 (1Y)
□ - NSLK8128	Schwarzbeck	AMN	8128-216	Apr. 06, 2015 (1Y)
■ - NSLK8126	Schwarzbeck	AMN	8126-404	Apr. 29, 2015 (1Y)
□ - 3825/2	EMCO	AMN	9109-1869	Apr. 29, 2015 (1Y)
■ - 3825/2	EMCO	AMN	9109-1867	Apr. 29, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


12.4 Test data

- Test Date : December 29, 2015
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

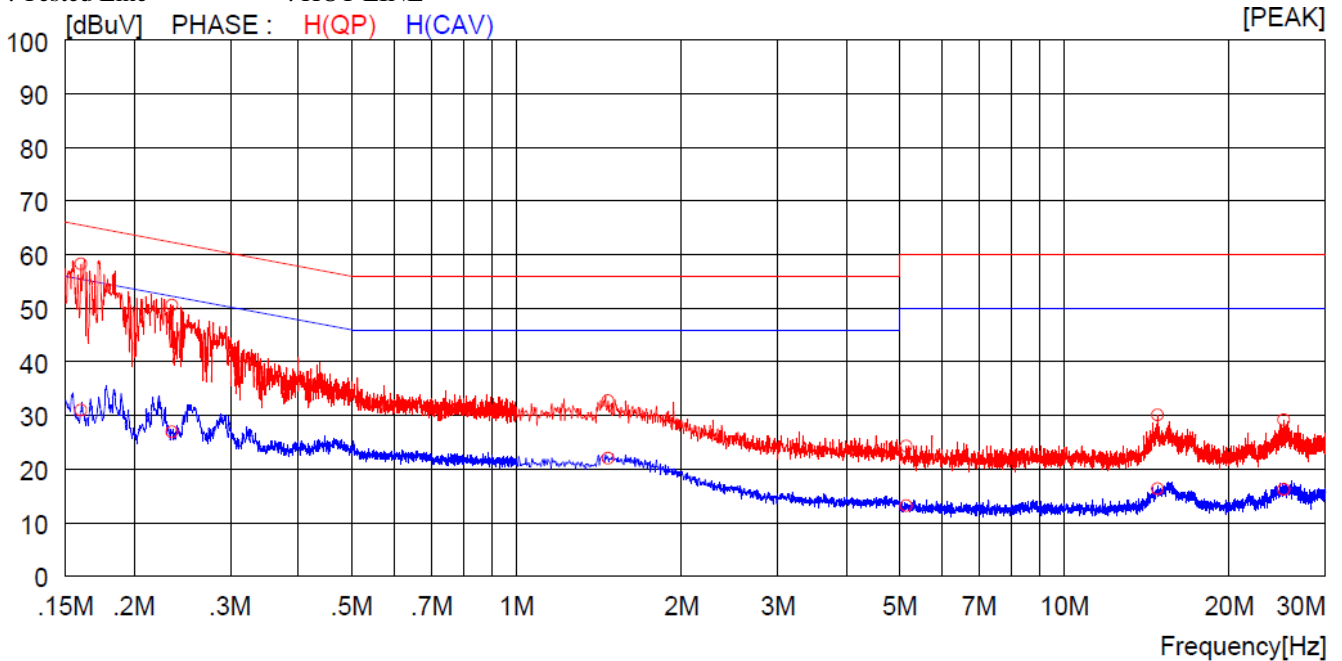

NO	FREQ [MHz]	READING (PK) [dBuV]	C.F [dB]	RESULT [dBuV]	LIMIT		MARGIN		PHASE	COMMENT
					QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
1	0.16000	48.3	9.9	58.2	65.5	55.5	7.3	-2.7	H(QP)	
2	0.23500	40.5	10.0	50.5	62.3	52.3	11.8	1.8	H(QP)	
3	1.46800	22.6	10.1	32.7	56.0	46.0	23.3	13.3	H(QP)	
4	5.14500	14.1	10.2	24.3	60.0	50.0	35.7	25.7	H(QP)	
5	14.80000	19.5	10.5	30.0	60.0	50.0	30.0	20.0	H(QP)	
6	25.21000	18.7	10.5	29.2	60.0	50.0	30.8	20.8	H(QP)	
7	0.16000	21.1	9.9	31.0	65.5	55.5	34.5	24.5	H(CAV)	
8	0.23500	16.8	10.1	26.9	62.3	52.3	35.4	25.4	H(CAV)	
9	1.46800	11.9	10.1	22.0	56.0	46.0	34.0	24.0	H(CAV)	
10	5.14500	2.9	10.2	13.1	60.0	50.0	46.9	36.9	H(CAV)	
11	14.80000	5.7	10.6	16.3	60.0	50.0	43.7	33.7	H(CAV)	
12	25.21000	5.6	10.5	16.1	60.0	50.0	43.9	33.9	H(CAV)	

-. Tested Line : NEUTRAL LINE

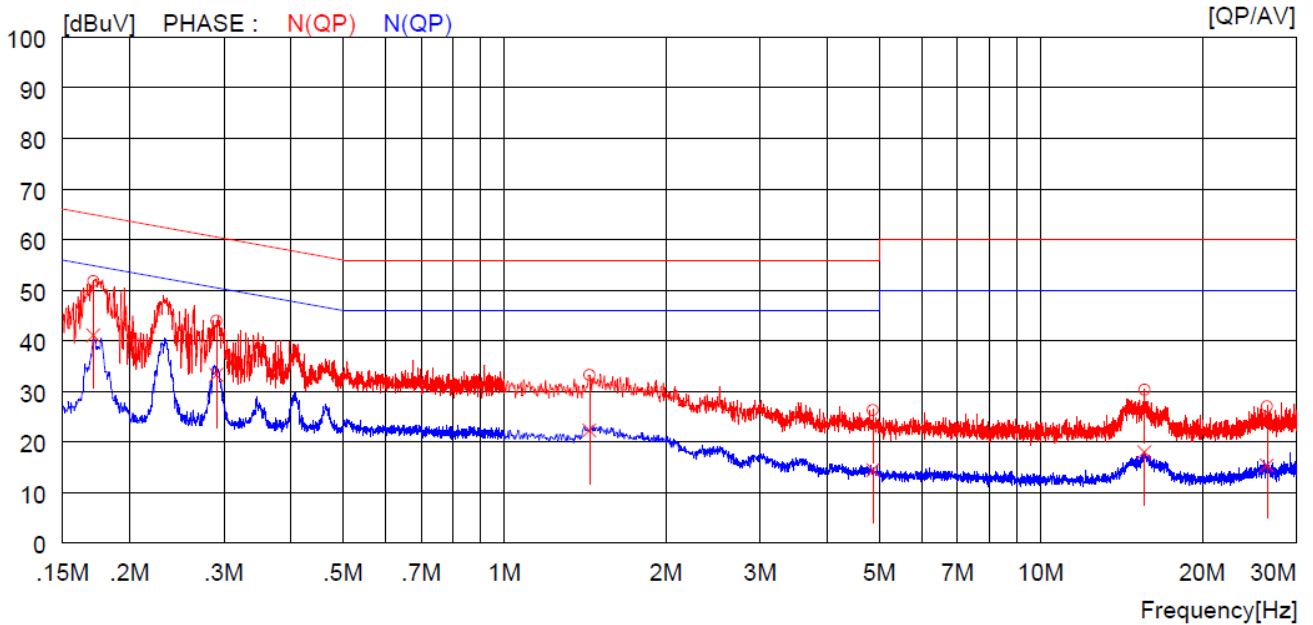

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.17100	41.9	----	9.9	51.8	----	64.9	----	13.1	----	N (QP)
2	0.29000	34.0	----	10.0	44.0	----	60.5	----	16.5	----	N (QP)
3	1.44000	23.1	----	10.1	33.2	----	56.0	----	22.8	----	N (QP)
4	4.86400	16.2	----	10.1	26.3	----	56.0	----	29.7	----	N (QP)
5	15.60000	19.8	----	10.5	30.3	----	60.0	----	29.7	----	N (QP)
6	26.42000	16.5	----	10.5	27.0	----	60.0	----	33.0	----	N (QP)
7	0.17100	----	31.2	9.9	----	41.1	----	54.9	----	13.8	N (CAV)
8	0.29000	----	23.3	10.0	----	33.3	----	50.5	----	17.2	N (CAV)
9	1.44000	----	12.2	10.1	----	22.3	----	46.0	----	23.7	N (CAV)
10	4.86400	----	4.4	10.1	----	14.5	----	46.0	----	31.5	N (CAV)
11	15.60000	----	7.5	10.5	----	18.0	----	50.0	----	32.0	N (CAV)
12	26.42000	----	4.9	10.5	----	15.4	----	50.0	----	34.6	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Tae-Ho, Kim / Senior Engineer