

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-182-RWD-019
AGR No. : A181A-388
Applicant : LG Innotek Co., Ltd.
Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Manufacturer : LG Innotek Co., Ltd.
Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Type of Equipment : 802.11 a/b/g/n/ac WiFi Module
FCC ID. : YZP-TWFMR003D
Model Name : TWFM-R003D
Multiple Model Name : TWFM-R003D(A), TWFM-R003D(B)
Serial number : N/A
Total page of Report : 147 pages (including this page)
Date of Incoming : February 02, 2018
Date of issue : February 12, 2018

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by: 

 Ki-Hong, Nam / Asst, Chief Engineer
 ONETECH Corp.

Approved by: 

 Keun-Young, Choi / Vice President
 ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	7
2. TEST SUMMARY.....	8
2.1 TEST ITEMS AND RESULTS	8
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	8
2.3 RELATED SUBMITTAL(S) / GRANT(S)	8
2.4 PURPOSE OF THE TEST	8
2.5 TEST METHODOLOGY.....	8
2.6 TEST FACILITY.....	8
3. GENERAL INFORMATION.....	9
3.1 PRODUCT DESCRIPTION.....	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	11
4. EUT MODIFICATIONS.....	11
5. SYSTEM TEST CONFIGURATION	12
5.1 JUSTIFICATION.....	12
5.2 PERIPHERAL EQUIPMENT	12
5.3 MODE OF OPERATION DURING THE TEST	13
5.4 CONFIGURATION OF TEST SYSTEM.....	14
5.5 ANTENNA REQUIREMENT	14
6. PRELIMINARY TEST	15
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	15
6.2 GENERAL RADIATED EMISSIONS TESTS	15
7. MIMIMUM 6 DB BANDWIDTH	16
7.1 OPERATING ENVIRONMENT	16
7.2 TEST SET-UP	16
7.3 TEST EQUIPMENT USED.....	16
7.4 TEST DATA FOR 802.11B WLAN MODE.....	17
7.4.1 Test data for Antenna 0	17
7.4.2 Test data for Antenna 1	19
7.5 TEST DATA FOR 802.11G WLAN MODE	21
7.5.1 Test data for Antenna 0	21
7.5.2 Test data for Antenna 1	23

7.6 TEST DATA FOR 802.11N_HT20 WLAN MODE25

 7.6.1 *Test data for Antenna 0*25

 7.6.2 *Test data for Antenna 1*27

7.7 TEST DATA FOR 802.11N_HT40 WLAN MODE29

 7.7.1 *Test data for Antenna 0*29

 7.7.2 *Test data for Antenna 1*31

8. MAXIMUM PEAK OUTPUT POWER33

8.1 OPERATING ENVIRONMENT33

8.2 TEST SET-UP33

8.3 TEST EQUIPMENT USED33

8.4 TEST DATA FOR 802.11B WLAN MODE34

 8.4.1 *Test data for Antenna 0*34

 8.4.2 *Test data for Antenna 1*34

 8.4.3 *Test data for Multiple Antenna*35

8.5 TEST DATA FOR 802.11G WLAN MODE36

 8.5.1 *Test data for Antenna 0*36

 8.5.2 *Test data for Antenna 1*36

 8.5.3 *Test data for Multiple Antenna*37

8.6 TEST DATA FOR 802.11N_HT20 WLAN MODE38

 8.6.1 *Test data for Antenna 0*38

 8.6.2 *Test data for Antenna 1*38

 8.6.3 *Test data for Multiple Antenna*39

8.7 TEST DATA FOR 802.11N_HT40 WLAN MODE40

 8.7.1 *Test data for Antenna 0*40

 8.7.2 *Test data for Antenna 1*40

 8.7.3 *Test data for Multiple Antenna*41

9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND42

9.1 OPERATING ENVIRONMENT42

9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT42

9.3 TEST SET-UP FOR RADIATED MEASUREMENT42

9.4 TEST EQUIPMENT USED42

9.5 TEST DATA FOR CONDUCTED EMISSION43

 9.5.1 *Test data for 802.11b WLAN Mode*43

 9.5.2 *Test data for 802.11g WLAN Mode*53

 9.5.3 *Test data for 802.11n_HT20 WLAN Mode*63

 9.5.4 *Test data for 802.11n_HT40 WLAN Mode*73

9.6 TEST DATA FOR RADIATED EMISSION83

9.6.1 Radiated Emission which fall in the Restricted Band..... 83

9.6.2 Radiated Emission which fall in the Band Edge 95

9.6.3 Spurious & Harmonic Radiated Emission..... 105

10. PEAK POWER SPECTRUL DENSITY 119

10.1 OPERATING ENVIRONMENT 119

10.2 TEST SET-UP 119

10.3 TEST EQUIPMENT USED..... 119

10.4 TEST DATA FOR 802.11B WLAN MODE..... 120

 10.4.1 Test data for Antenna 0 120

 10.4.2 Test data for Antenna 1 122

 10.4.3 Test data for Multiple Antenna 124

10.5 TEST DATA FOR 802.11G WLAN MODE 125

 10.5.1 Test data for Antenna 0 125

 10.5.2 Test data for Antenna 1 127

 10.5.3 Test data for Multiple Antenna 129

10.6 TEST DATA FOR 802.11N_HT20 WLAN MODE..... 130

 10.6.1 Test data for Antenna 0 130

 10.6.2 Test data for Antenna 1 132

 10.6.3 Test data for Multiple Antenna 134

10.7 TEST DATA FOR 802.11N_HT40 WLAN MODE..... 135

 10.7.1 Test data for Antenna 0 135

 10.7.2 Test data for Antenna 1 137

 10.7.3 Test data for Multiple Antenna 139

11. RADIATED EMISSION TEST 140

11.1 OPERATING ENVIRONMENT 140

11.2 TEST SET-UP 140

11.3 TEST EQUIPMENT USED..... 140

11.4 TEST DATA FOR ANTENNA 0 (UANZZZWHA002)..... 141

 11.4.1 Test data for 30 MHz ~ 1 000 MHz..... 141

 11.4.2 Test data for Below 30 MHz..... 142

 11.4.3 Test data for above 1 GHz 142

11.5 TEST DATA FOR ANTENNA 0 (UANZZZWHA003)..... 143

 11.5.1 Test data for 30 MHz ~ 1 000 MHz..... 143

 11.5.2 Test data for Below 30 MHz..... 144

 11.5.3 Test data for above 1 GHz 144

12. CONDUCTED EMISSION TEST 145

12.1 OPERATING ENVIRONMENT 145

12.2 TEST SET-UP 145

12.3 TEST EQUIPMENT USED 145

12.4 TEST DATA 146

REVISION HISTORY

Issued Report No.	Issued Date	Revisions	Effect Section
W178R-D010	August 07, 2017	Initial Issue	All
OT-182-RWD-019	February 12, 2018	Added the multiple model.	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.
 Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
 Contact Person : Inchang Jeong / Senior Research Engineet
 Telephone No. : +82-62-950-0332
 FCC ID : YZP-TWFMR003D
 Model Name : TWFM-R003D
 Serial Number : N/A
 Date : February 12, 2018

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Modular Transmitter, 802.11 a/b/g/n/ac WiFi Module
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 DTS Meas Guidance v04
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Innotek Co., Ltd., Model TWFM-R003D (referred to as the EUT in this report) is a 802.11 a/b/g/n/ac WiFi Module. Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	802.11 a/b/g/n/ac WiFi Module		
Operating Frequency	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))	
		2 422 MHz ~ 2 452 MHz (802.11n(HT40))	
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
			5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
			5 210 MHz (802.11ac(VHT80))
		5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
			5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
5 775 MHz (802.11ac(VHT80))			
RF Output Power	WLAN 2.4 GHz Band	Antenna 0	Wi-Fi 802.11b (12.78 dBm) Wi-Fi 802.11g (11.73 dBm) Wi-Fi 802.11n(HT20) (10.96 dBm) Wi-Fi 802.11n(HT40) (10.16 dBm)
		Antenna 1	Wi-Fi 802.11b (14.32 dBm) Wi-Fi 802.11g (12.84 dBm) Wi-Fi 802.11n(HT20) (10.83 dBm) Wi-Fi 802.11n(HT40) (10.77 dBm)
		Antenna 0 + Antenna 1	Wi-Fi 802.11b (16.63 dBm) Wi-Fi 802.11g (15.33 dBm) Wi-Fi 802.11n(HT20) (13.86 dBm) Wi-Fi 802.11n(HT40) (13.49 dBm)

RF Output Power	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	Antenna 0	Wi-Fi 802.11a (9.37 dBm) Wi-Fi 802.11n(HT20) (7.49 dBm) Wi-Fi 802.11n(HT40) (7.58 dBm) Wi-Fi 802.11ac(HT80) (6.30 dBm)
			Antenna 1	Wi-Fi 802.11a (10.14 dBm) Wi-Fi 802.11n(HT20) (8.00 dBm) Wi-Fi 802.11n(HT40) (8.43 dBm) Wi-Fi 802.11ac(HT80) (6.10 dBm)
			Antenna 0 + Antenna 1	Wi-Fi 802.11a (12.78 dBm) Wi-Fi 802.11n(HT20) (10.76 dBm) Wi-Fi 802.11n(HT40) (11.04 dBm) Wi-Fi 802.11ac(HT80) (9.21 dBm)
		5 725 MHz ~ 5 850 MHz Band	Antenna 0	Wi-Fi 802.11a (9.83 dBm) Wi-Fi 802.11n(HT20) (7.76 dBm) Wi-Fi 802.11n(HT40) (7.62 dBm) Wi-Fi 802.11ac(HT80) (5.74 dBm)
			Antenna 1	Wi-Fi 802.11a (9.80 dBm) Wi-Fi 802.11n(HT20) (7.71 dBm) Wi-Fi 802.11n(HT40) (7.72 dBm) Wi-Fi 802.11ac(HT80) (5.84 dBm)
			Antenna 0 + Antenna 1	Wi-Fi 802.11a (12.83 dBm) Wi-Fi 802.11n(HT20) (10.75 dBm) Wi-Fi 802.11n(HT40) (10.57 dBm) Wi-Fi 802.11ac(HT80) (8.80 dBm)

Modulation Type	WLAN 2.4 GHz Band	DSSS Modulation(DBPSK/DQPSK/CCK) OFDM Modulation(BPSK/QPSK/16QAM/64QAM)		
	WLAN 5 GHz Band	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)		
Antenna Type	WLAN 2.4 GHz Band	Antenna 0	UANZZZWHA002 : 1.30 dBi UANZZZWHA003 : 1.20 dBi	
		Antenna 1	2.13 dBi	
		Antenna 0 + Antenna 1	UANZZZWHA002 + Antenna 1 : 4.75 dBi UANZZZWHA003 + Antenna 1 : 4.70 dBi	
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	UANZZZWHA002 : 1.00 dBi UANZZZWHA003 : 1.30 dBi	
		Antenna 1	1.01 dBi	
		Antenna 0 + Antenna 1	UANZZZWHA002 + Antenna 1 : 4.02 dBi UANZZZWHA003 + Antenna 1 : 4.17 dBi	
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	UANZZZWHA002 : 1.30 dBi UANZZZWHA003 : 1.20 dBi	
		Antenna 1	2.04 dBi	
		Antenna 0 + Antenna 1	UANZZZWHA002 + Antenna 1 : 4.70 dBi UANZZZWHA003 + Antenna 1 : 4.65 dBi	
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	40 MHz		

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
TWFM-R003D	Basic Model	<input type="checkbox"/>
TWFM-R003D(A)	The difference between this model and the basic model is the PDN function added (Main IC Wake-up) and resistance component R6 added.	<input type="checkbox"/>
TWFM-R003D(B)	The difference between this model and the basic model is the Antenna.	<input checked="" type="checkbox"/>

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Innotek Co., Ltd.	TWFM-R003D	-

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
TWFM-R003D	LG Innotek Co., Ltd.	802.11 a/b/g/n/ac WiFi Module (EUT)	Notebook PC
PP11L	DELL	Notebook PC	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 b (Middle Channel)	1 Mbps	12.19	14.32
	2 Mbps	12.05	14.19
	5.5 Mbps	11.84	14.05
	11 Mbps	11.60	13.92
802.11g (Middle Channel)	6 Mbps	11.56	12.84
	9 Mbps	11.41	12.68
	12 Mbps	11.31	12.57
	18 Mbps	11.07	12.39
	24 Mbps	10.94	12.28
	36 Mbps	10.77	12.11
	48 Mbps	10.60	11.99
	54 Mbps	10.43	11.85
HT 20 (Middle Channel)	6.5 Mbps	10.27	10.83
	13 Mbps	10.08	10.72
	19.5 Mbps	9.81	10.55
	26 Mbps	9.64	10.38
	39 Mbps	9.43	10.28
	52 Mbps	9.36	10.18
	58.5 Mbps	9.28	10.00
	65 Mbps	9.20	9.85
HT 40 (Middle Channel)	13.5 Mbps	9.80	10.77
	27 Mbps	9.62	10.57
	40.5 Mbps	9.59	10.45
	54 Mbps	9.48	10.33
	81 Mbps	9.37	10.18
	108 Mbps	9.18	10.07
	121.5 Mbps	9.03	9.90
	135 Mbps	8.97	9.74

-. The worse case data rate for each modulation is determined 1 Mbps(Ant.0/Ant.1) for IEEE 802.11b, 6 Mbps(Ant.0/Ant.1) for IEEE 802.11g, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40.

-. To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

5.4 Configuration of Test System

Line Conducted Test: The jig board of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is WLAN 2.4 GHz Band & 5 GHz Band is PCB Antenna & External Antenna (Two kinds of PCB Antenna).

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MIMIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 41 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

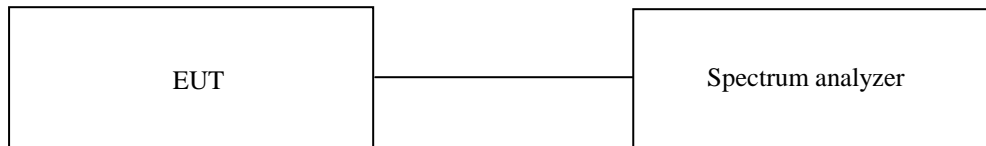

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data for 802.11b WLAN Mode

7.4.1 Test data for Antenna 0

-. Test Date : February 05, 2018 ~ February 09, 2018


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	9.09	0.50	8.59
Middle	2 442.00	9.09	0.50	8.59
High	2 462.00	9.09	0.50	8.59

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

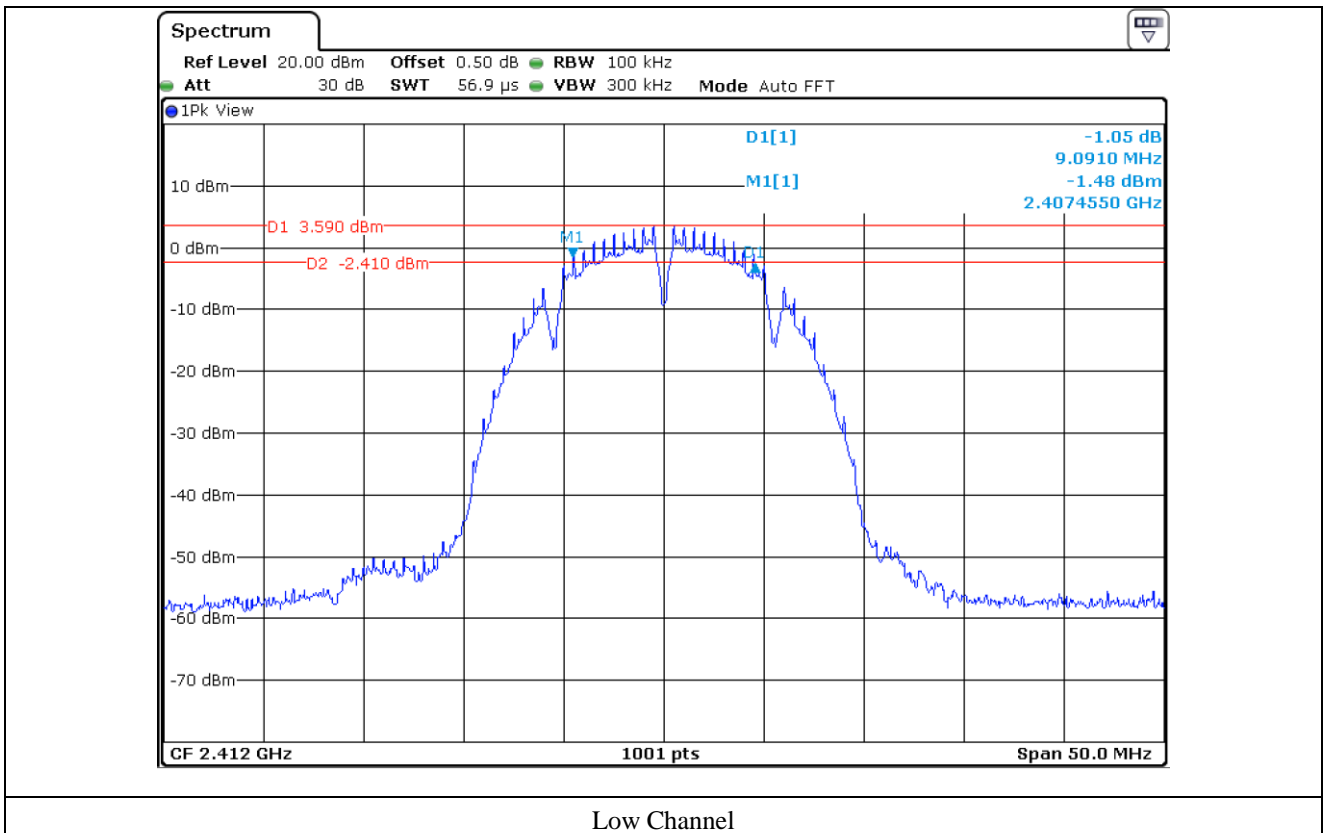

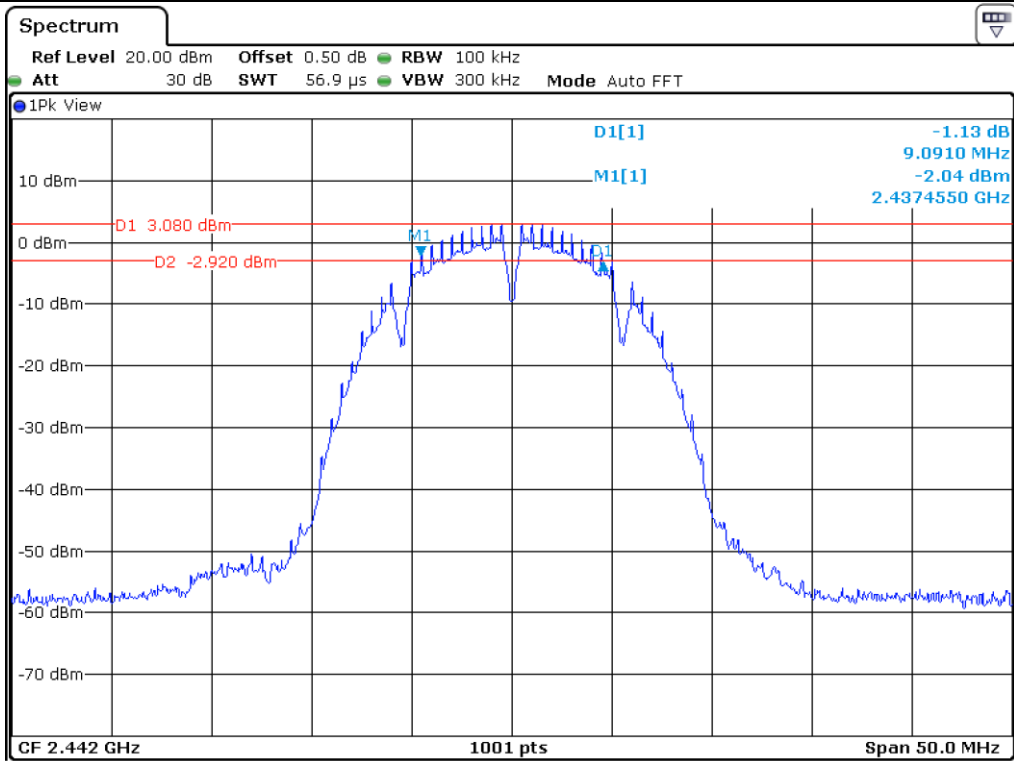

Middle Channel

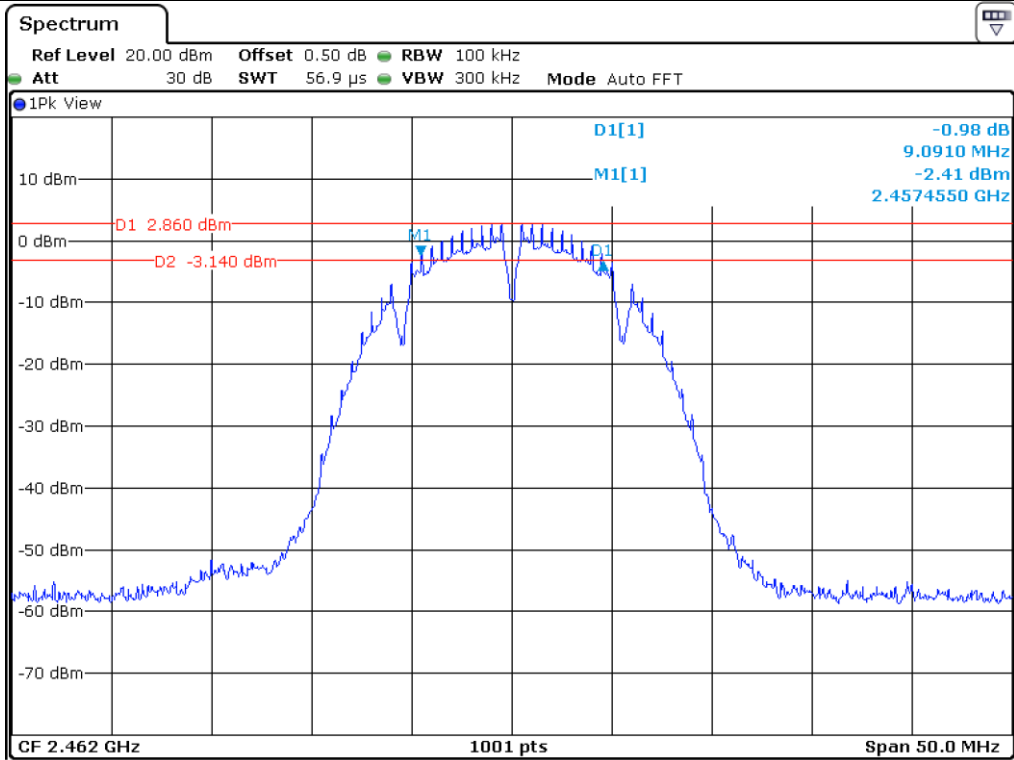

High Channel


7.4.2 Test data for Antenna 1


- Test Date : July 17, 2017
 - Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	9.05	0.50	8.55
Middle	2 442.00	9.09	0.50	8.59
High	2 462.00	9.09	0.50	8.59


Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Assistant Manager

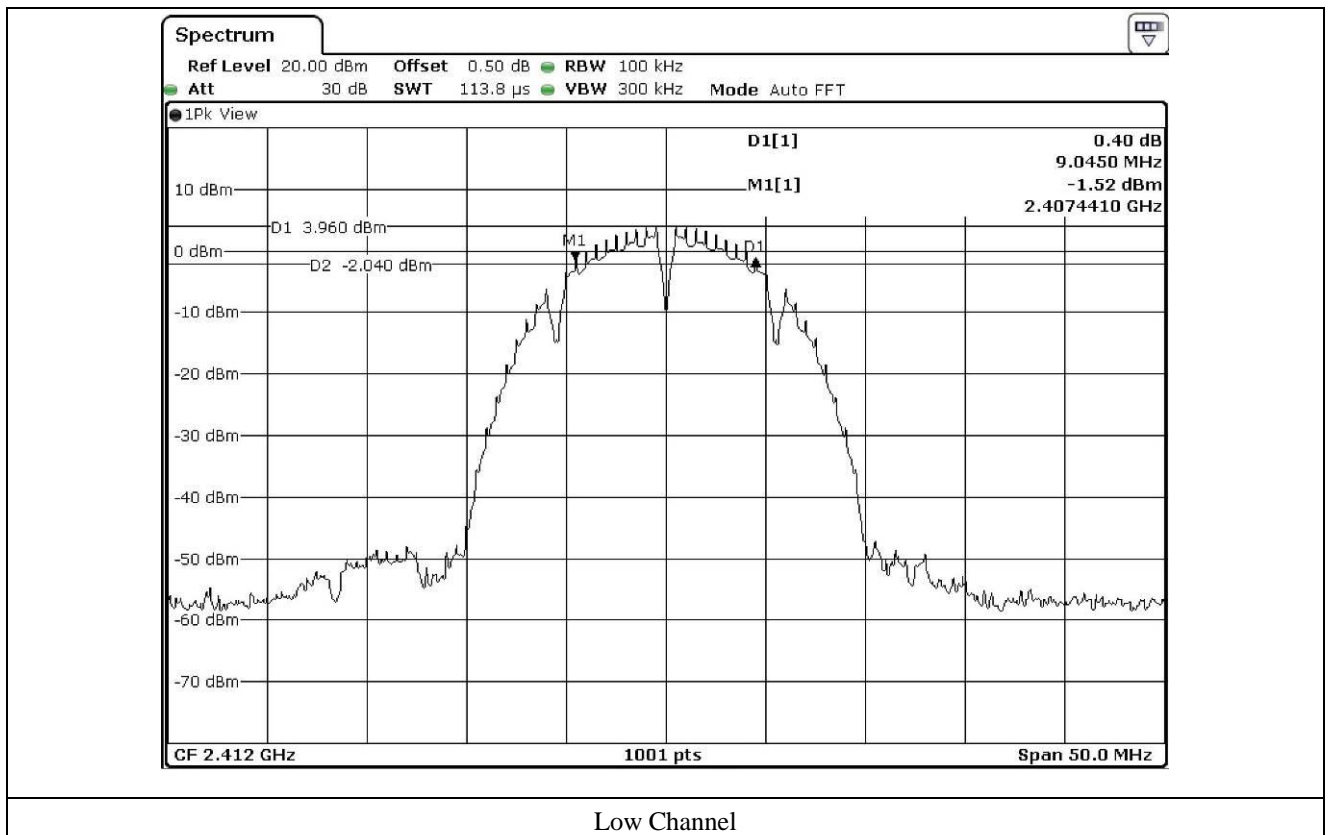

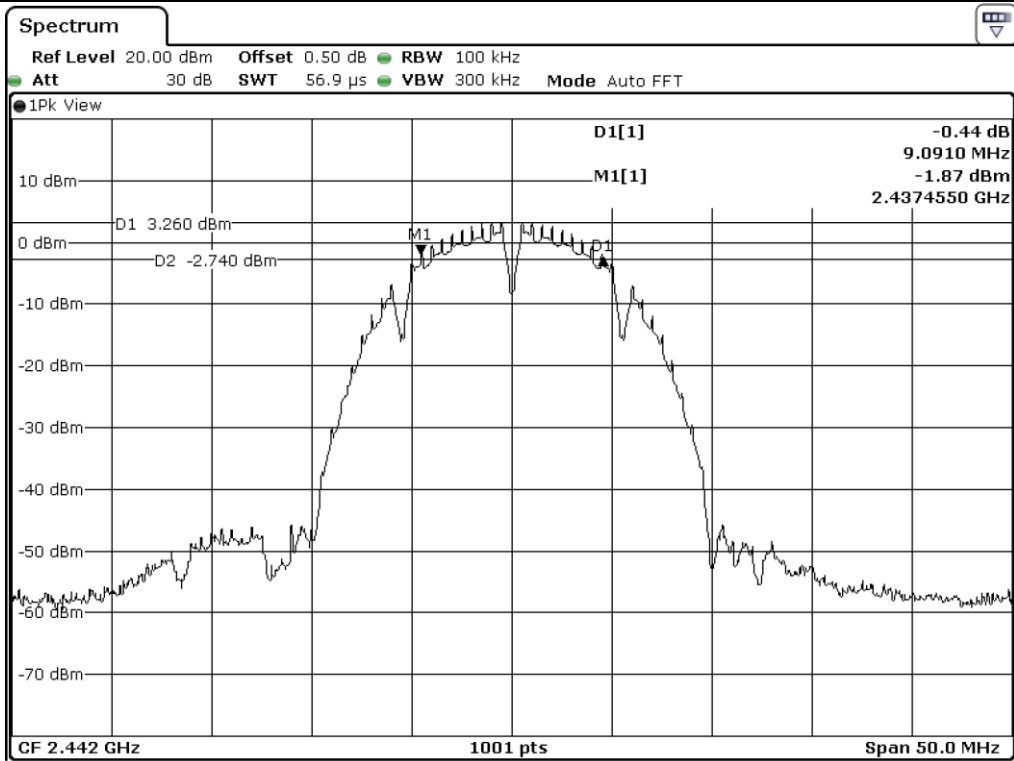

Middle Channel

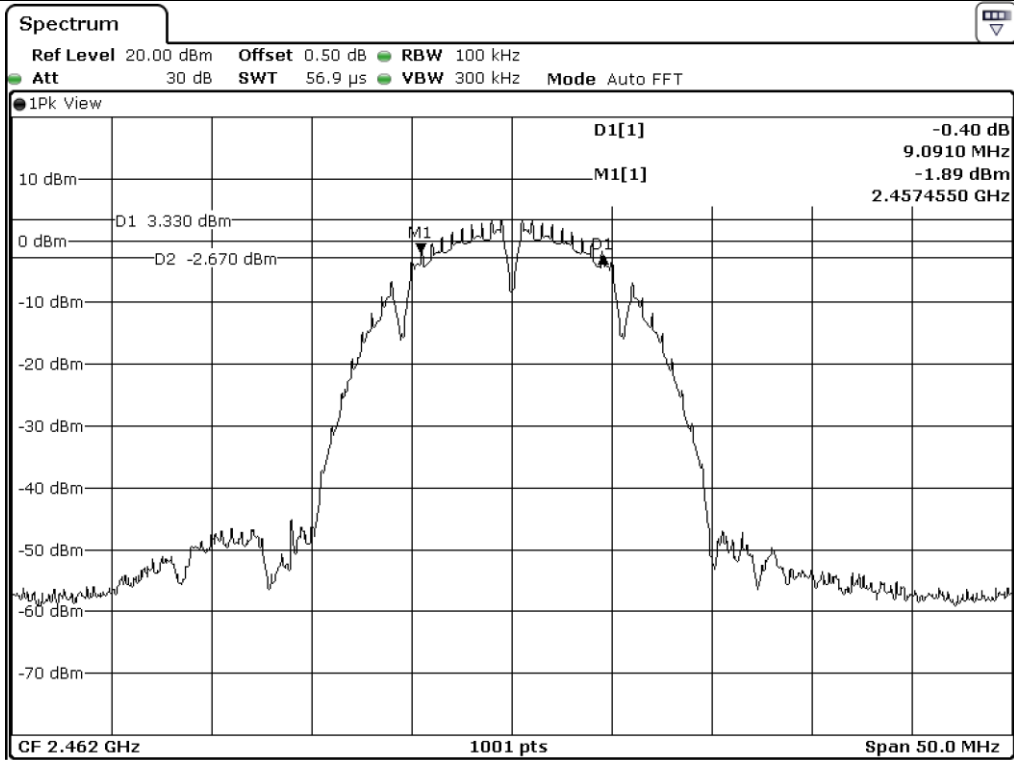

High Channel

7.5 Test data for 802.11g WLAN Mode

7.5.1 Test data for Antenna 0


-. Test Date : February 05, 2018 ~ February 09, 2018


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	16.28	0.50	15.78
Middle	2 442.00	16.33	0.50	15.83
High	2 462.00	16.28	0.50	15.78


Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Assistant Manager

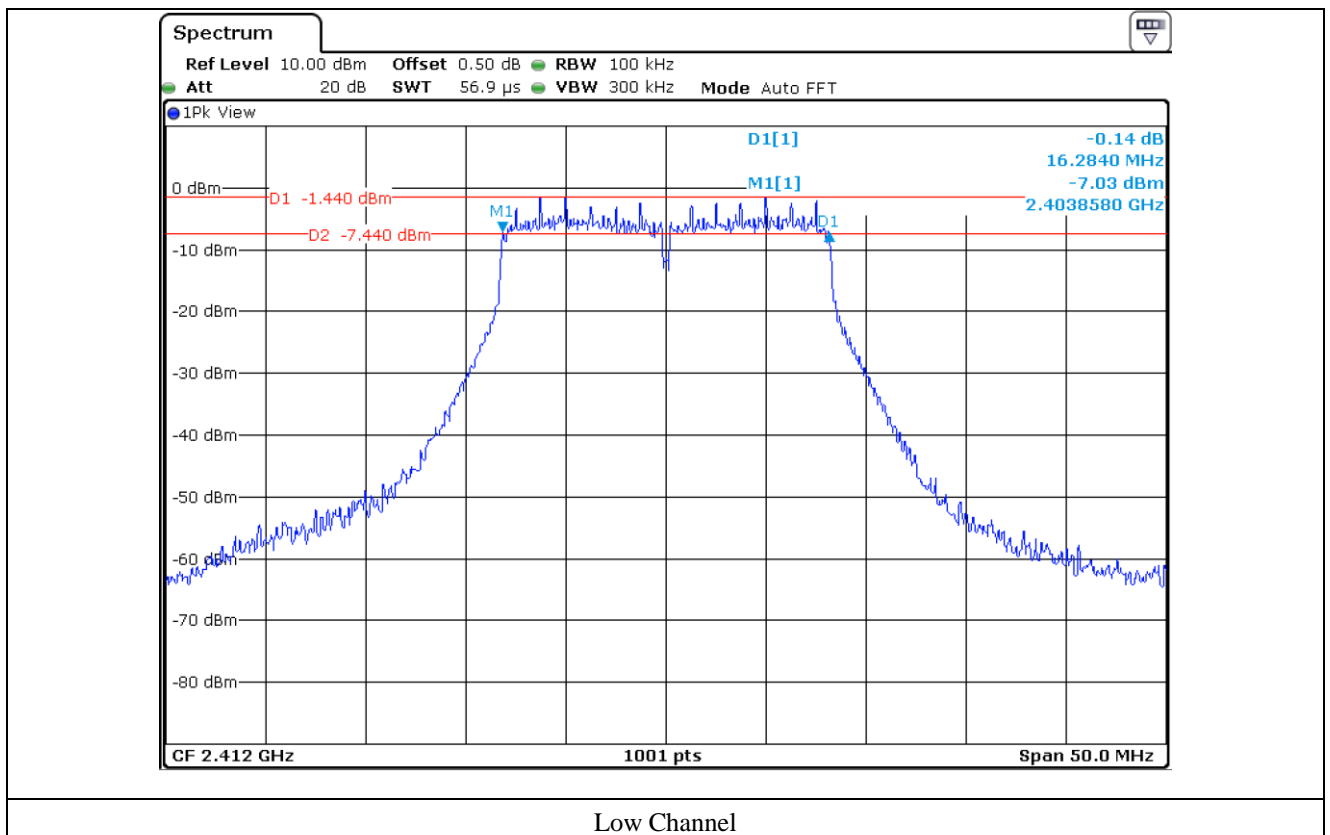

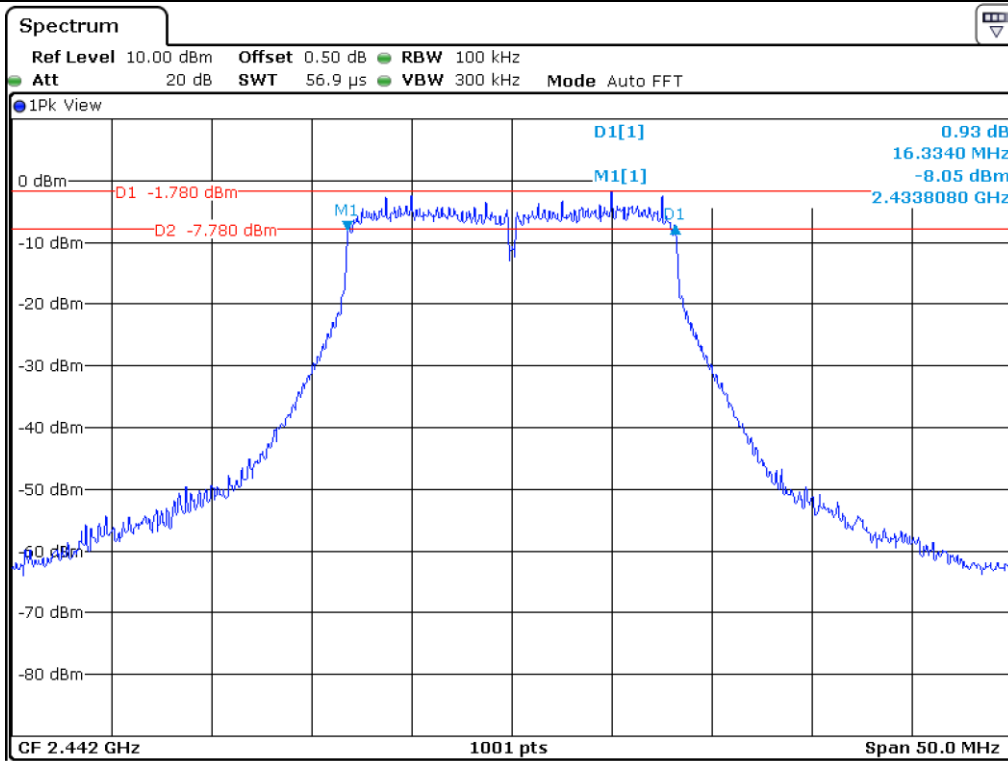

Middle Channel

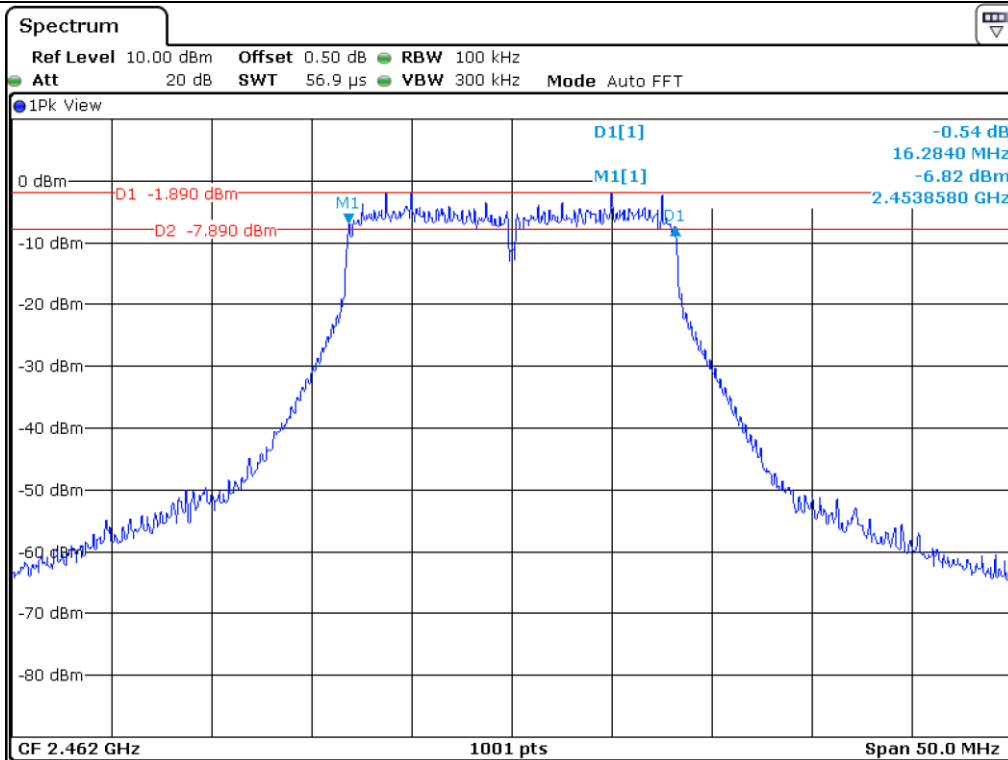

High Channel


7.5.2 Test data for Antenna 1


- Test Date : July 17, 2017
 - Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	16.43	0.50	15.93
Middle	2 442.00	16.38	0.50	15.88
High	2 462.00	16.43	0.50	15.93


Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Assistant Manager

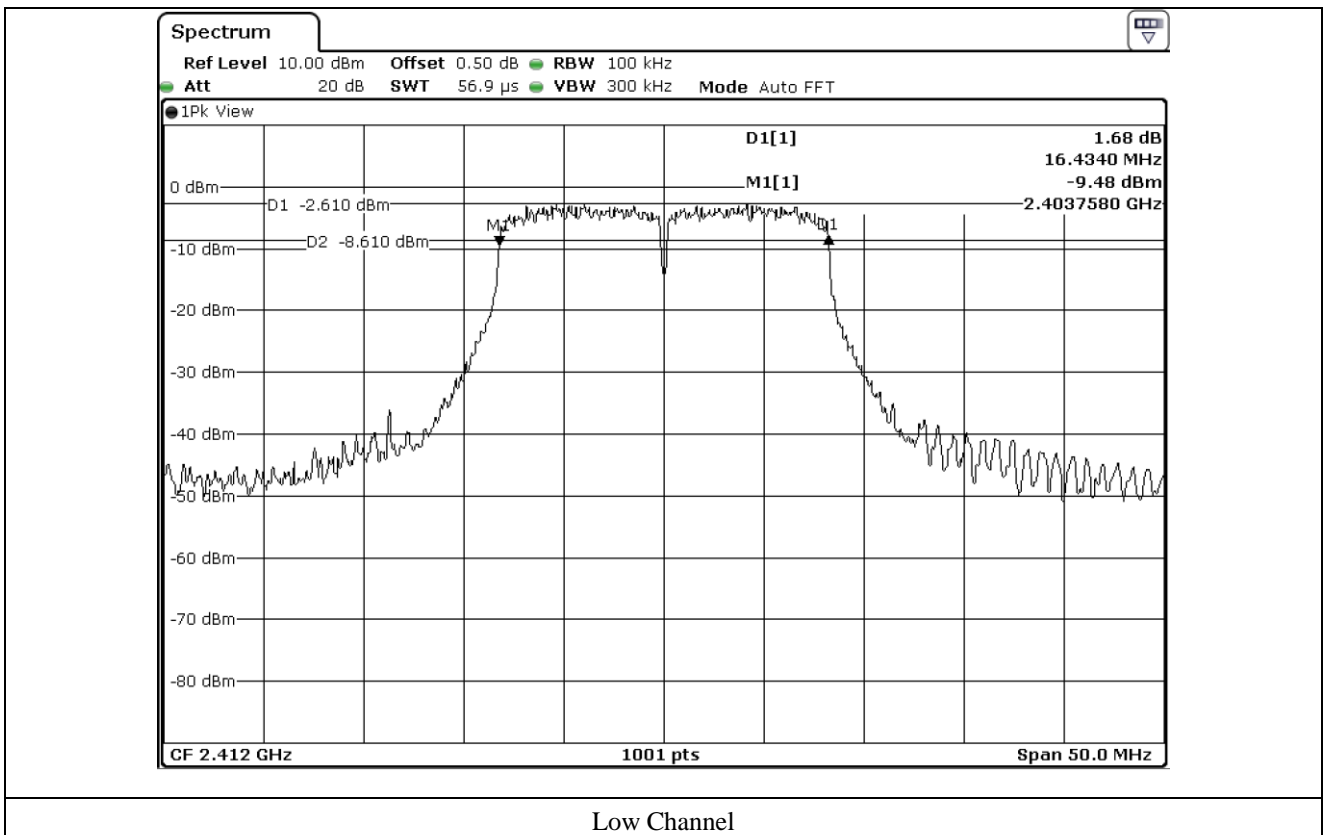

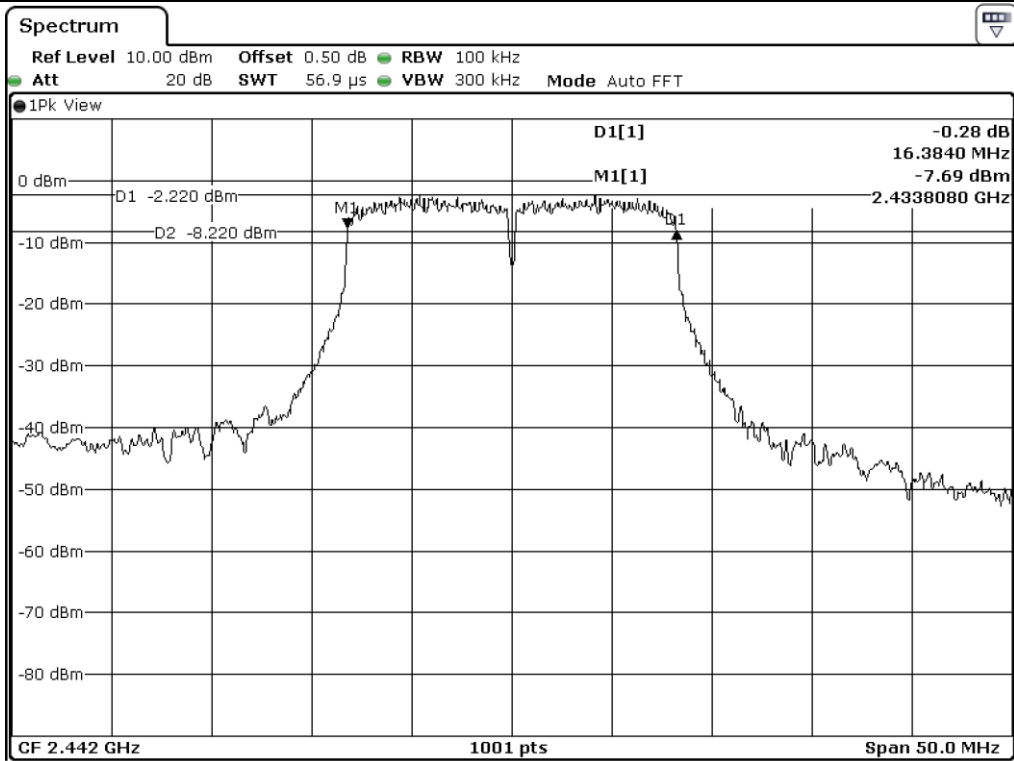

Middle Channel

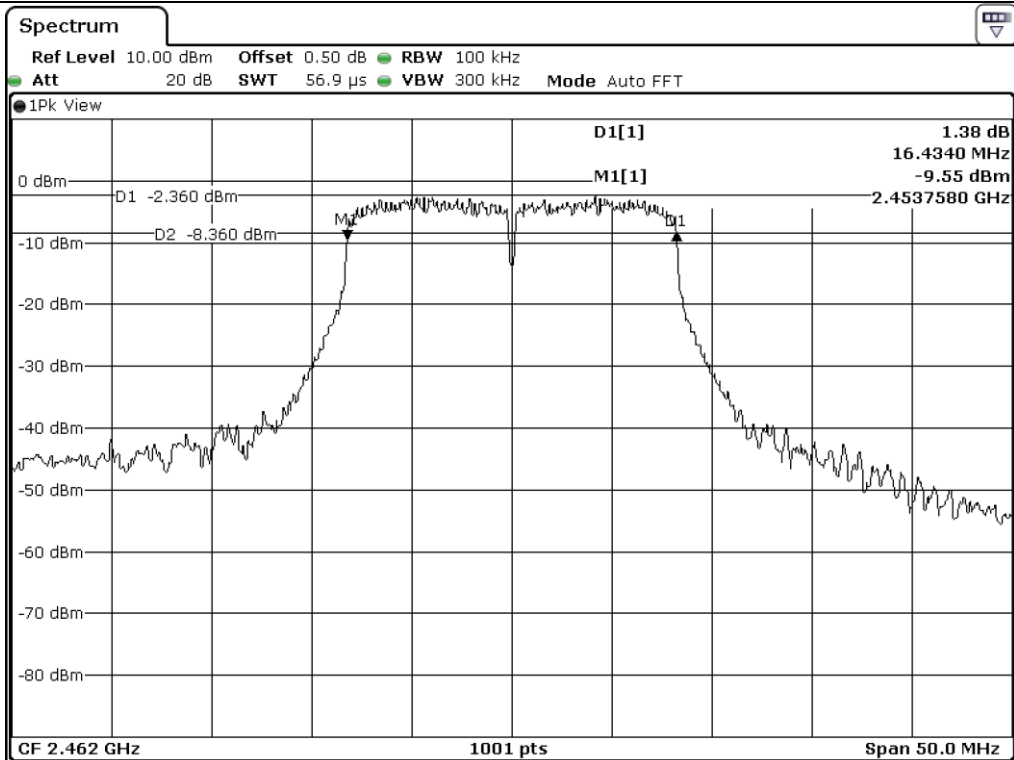

High Channel

7.6 Test data for 802.11n_HT20 WLAN Mode

7.6.1 Test data for Antenna 0

-. Test Date : February 05, 2018 ~ February 09, 2018


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	17.13	0.50	16.63
Middle	2 442.00	15.98	0.50	15.48
High	2 462.00	16.28	0.50	15.78

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

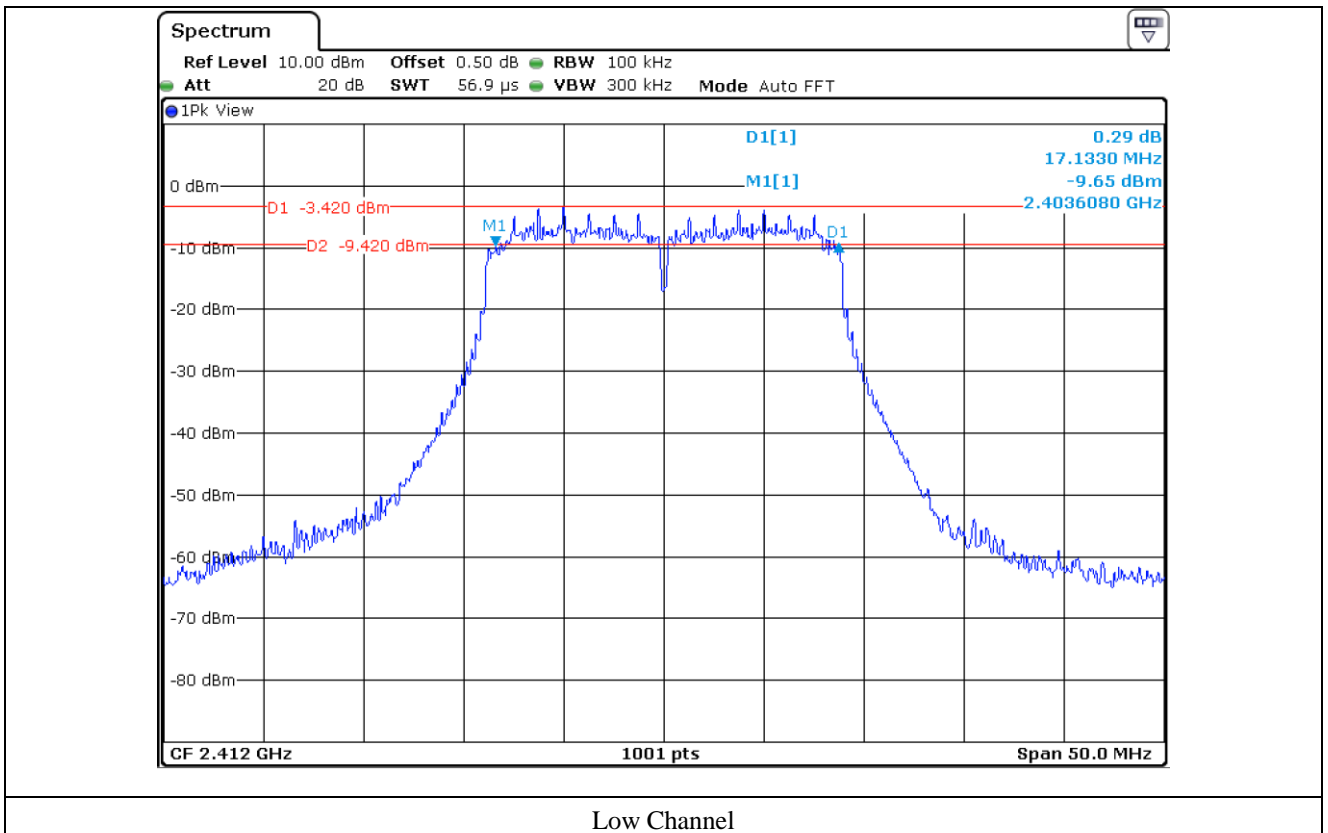

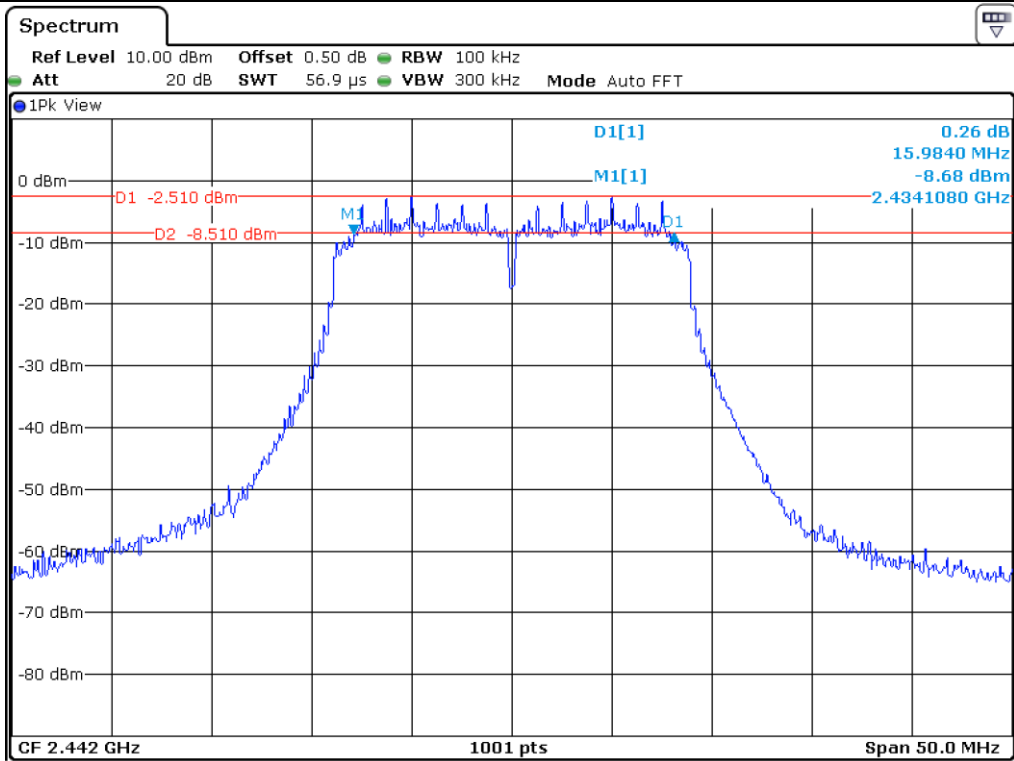

Middle Channel

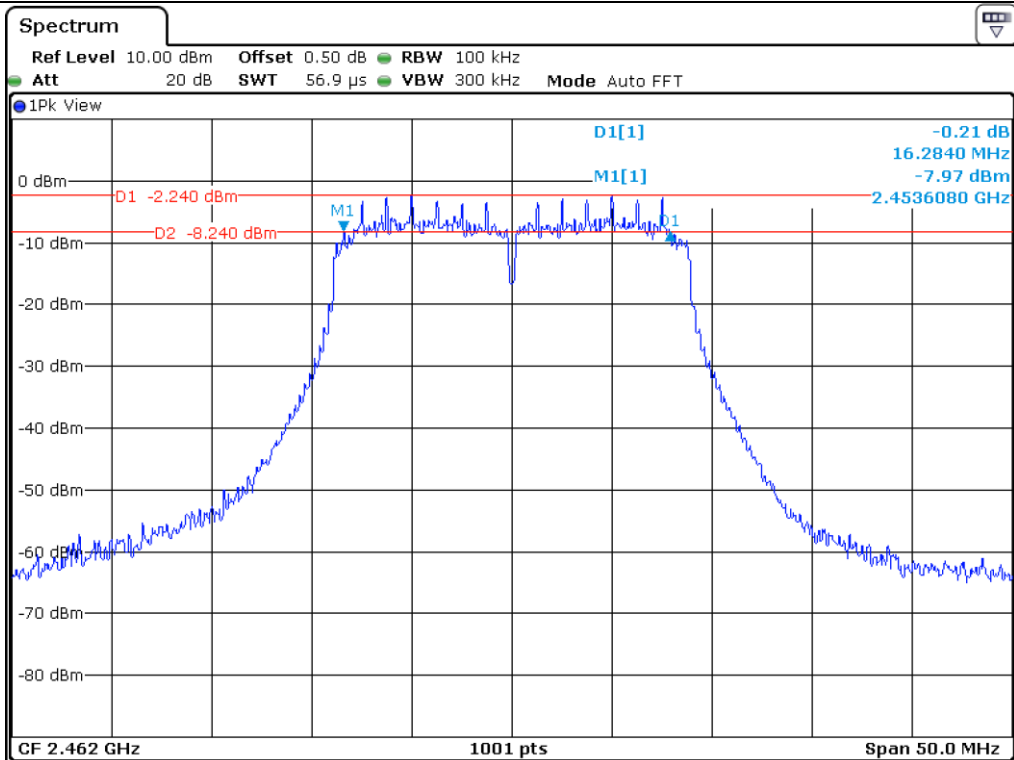

High Channel

7.6.2 Test data for Antenna 1


-. Test Date : July 17, 2017
 -. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	17.58	0.50	17.08
Middle	2 442.00	17.58	0.50	17.08
High	2 462.00	17.53	0.50	17.03

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

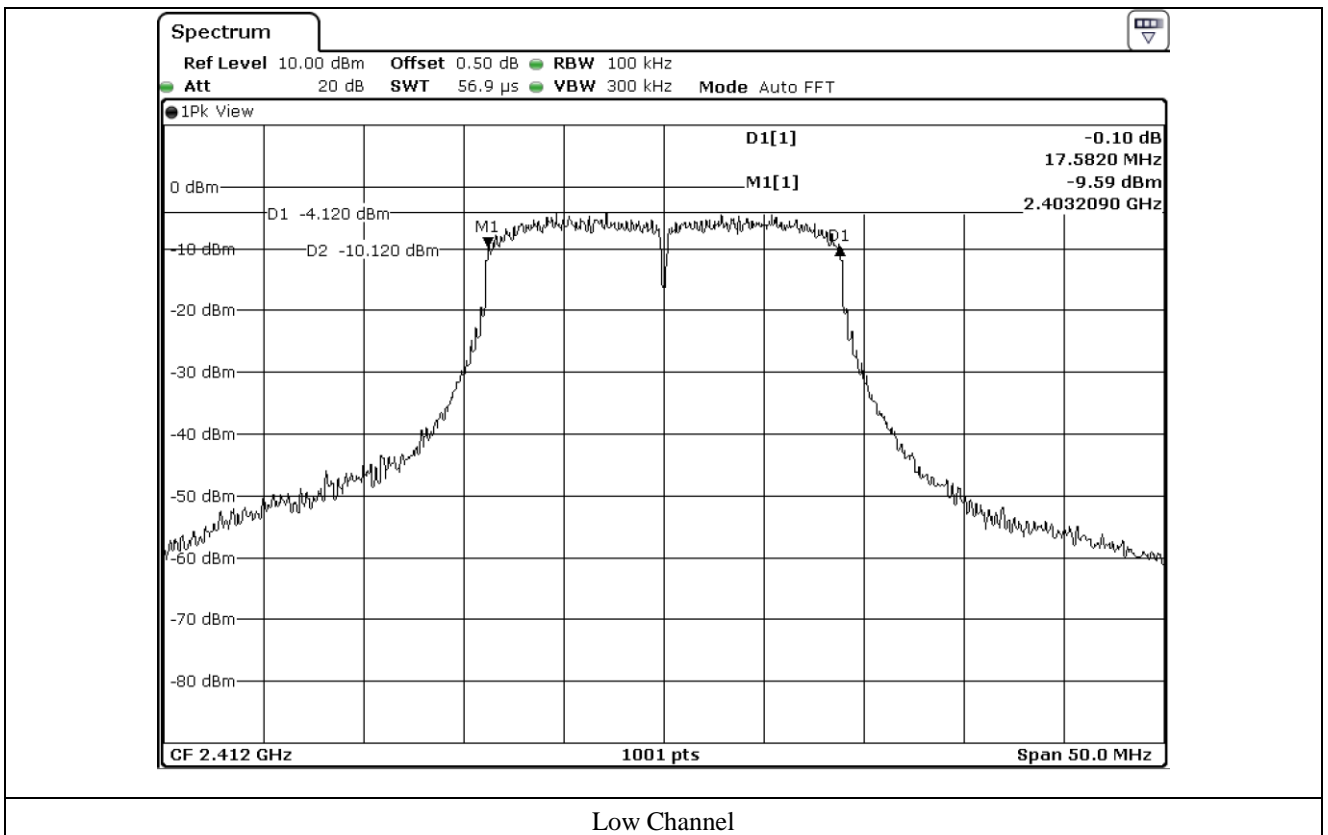

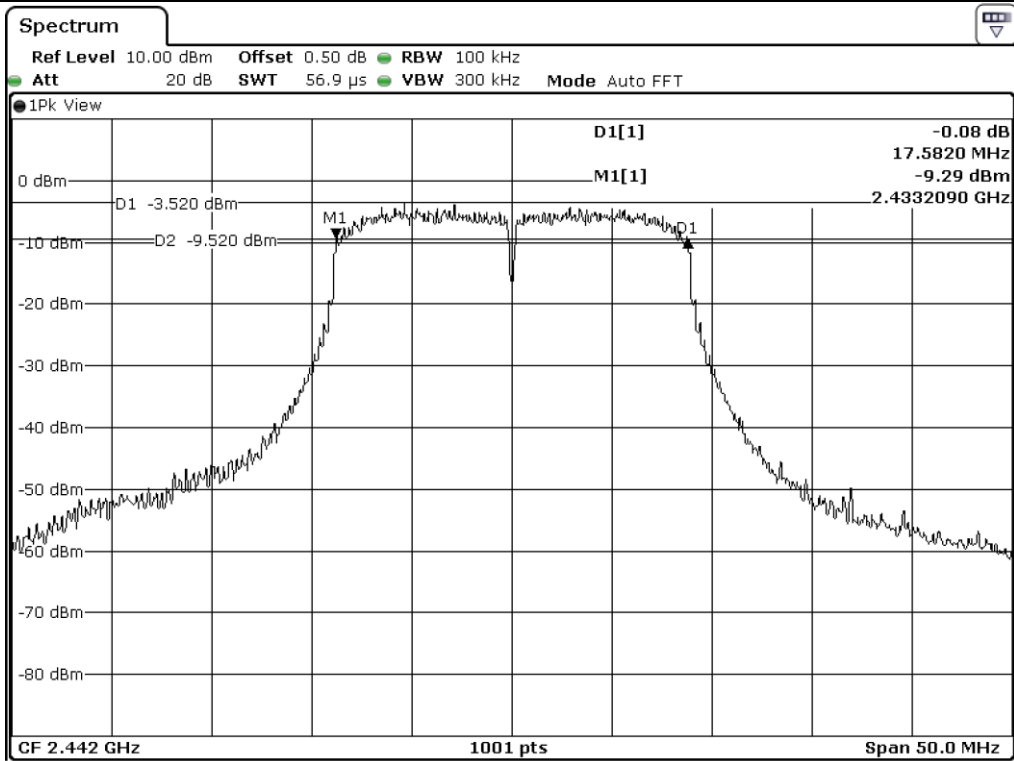

Middle Channel

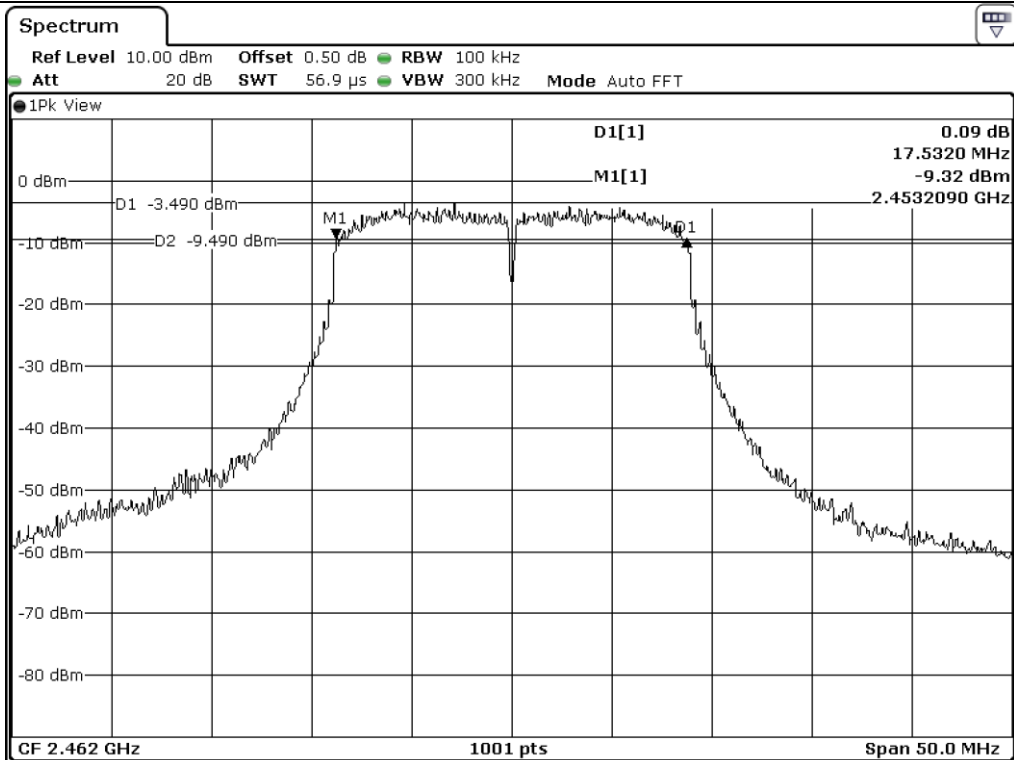

High Channel

7.7 Test data for 802.11n_HT40 WLAN Mode

7.7.1 Test data for Antenna 0

-. Test Date : February 05, 2018 ~ February 09, 2018


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 422.00	35.66	0.50	35.16
Middle	2 442.00	36.06	0.50	35.56
High	2 452.00	35.76	0.50	35.26

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

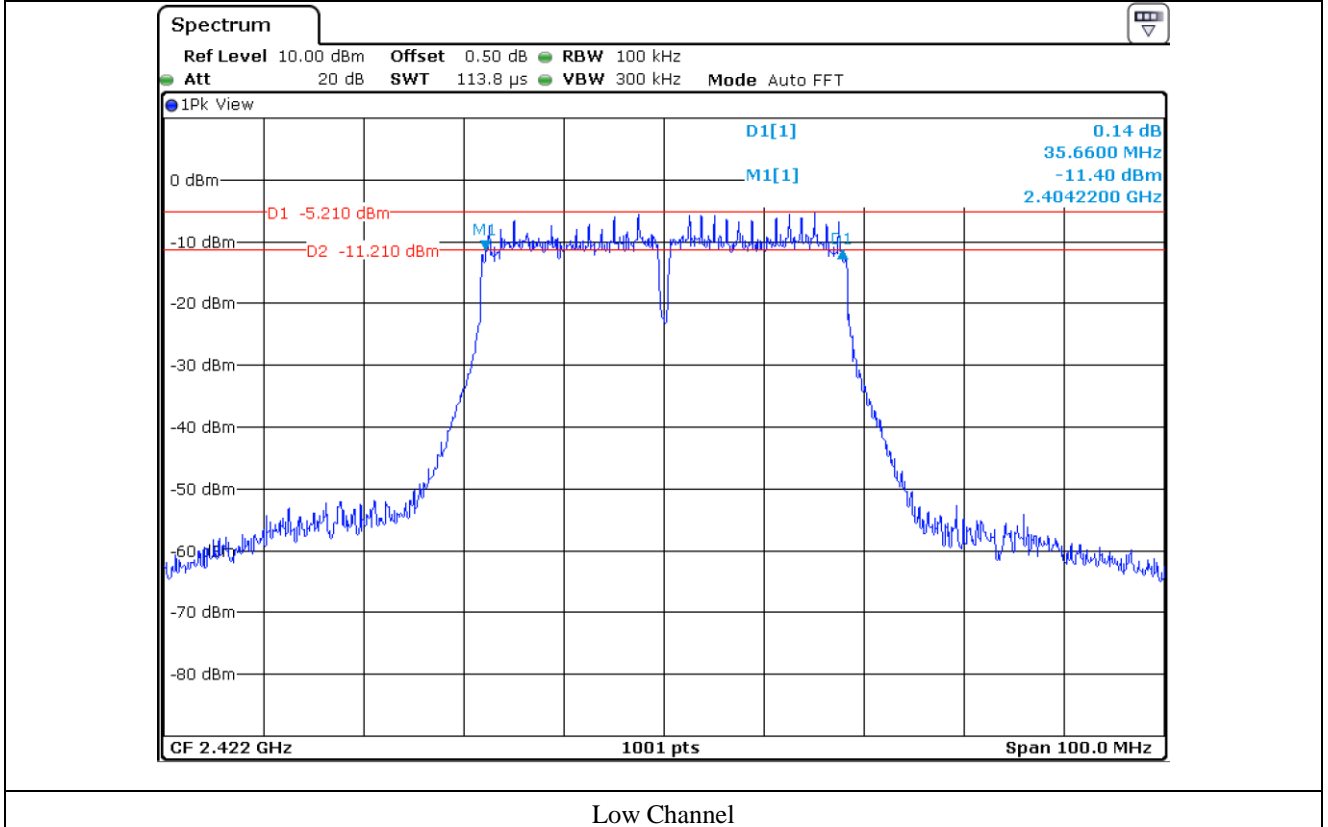

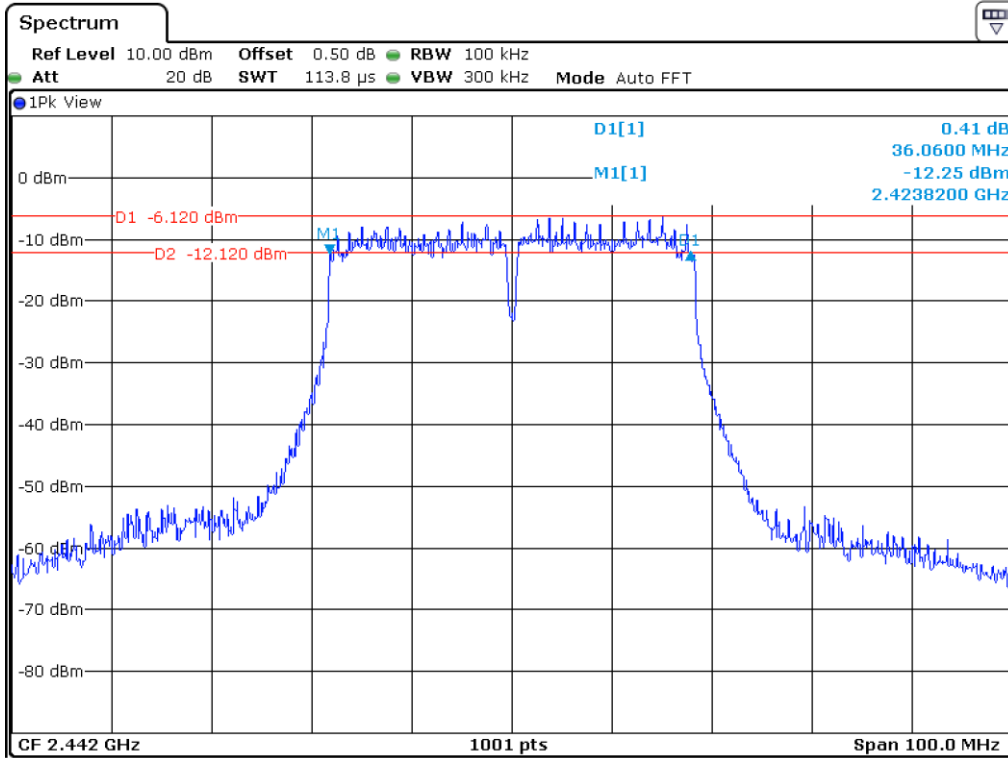

Middle Channel

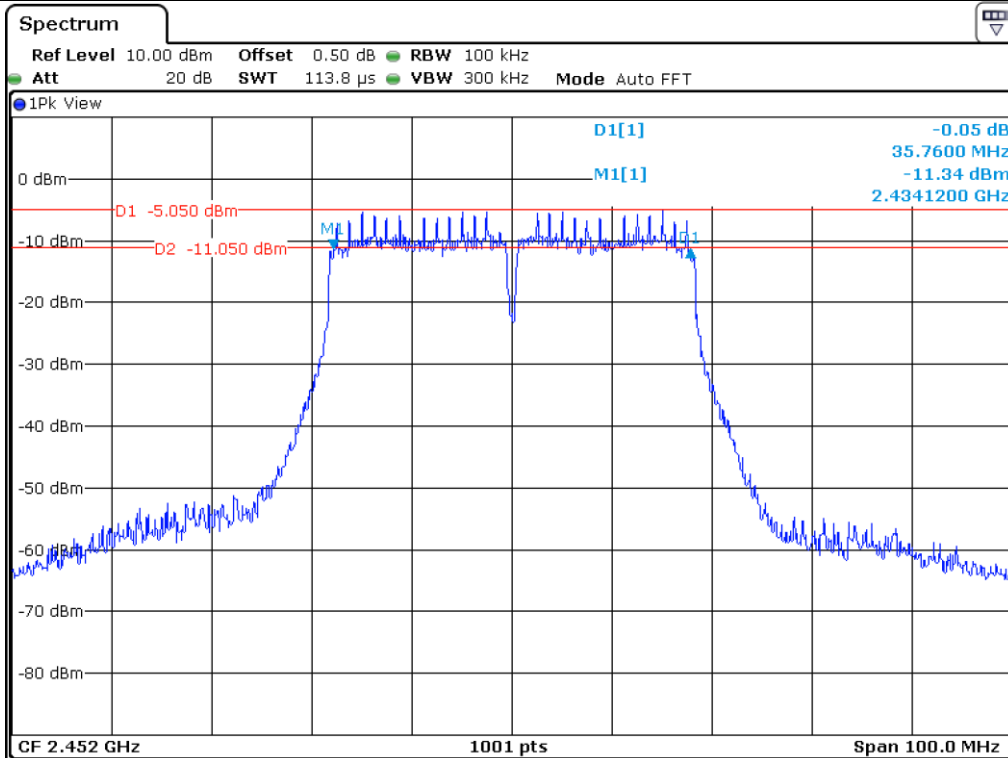

High Channel

7.7.2 Test data for Antenna 1


- Test Date : July 17, 2017
 - Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 422.00	36.36	0.50	35.86
Middle	2 442.00	36.36	0.50	35.86
High	2 452.00	36.36	0.50	35.86

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

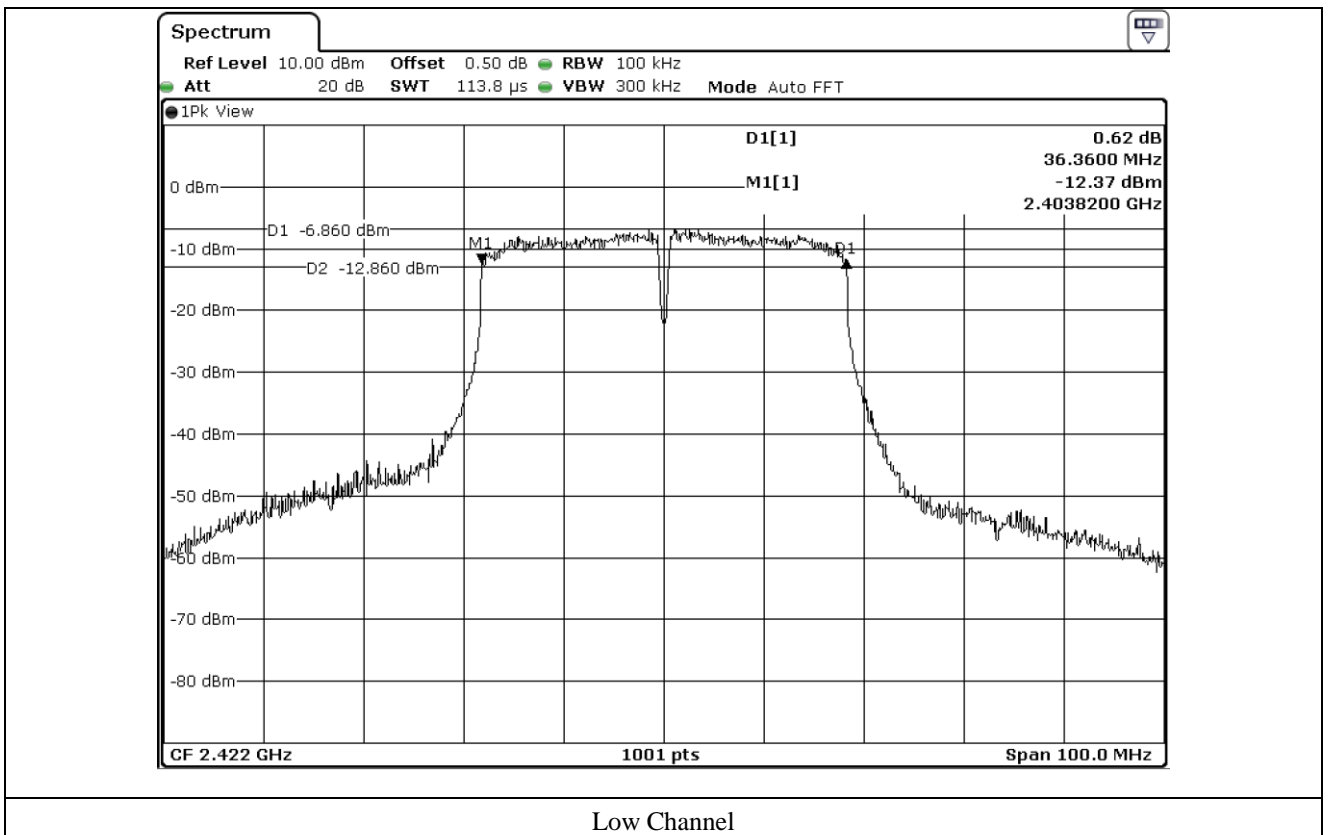

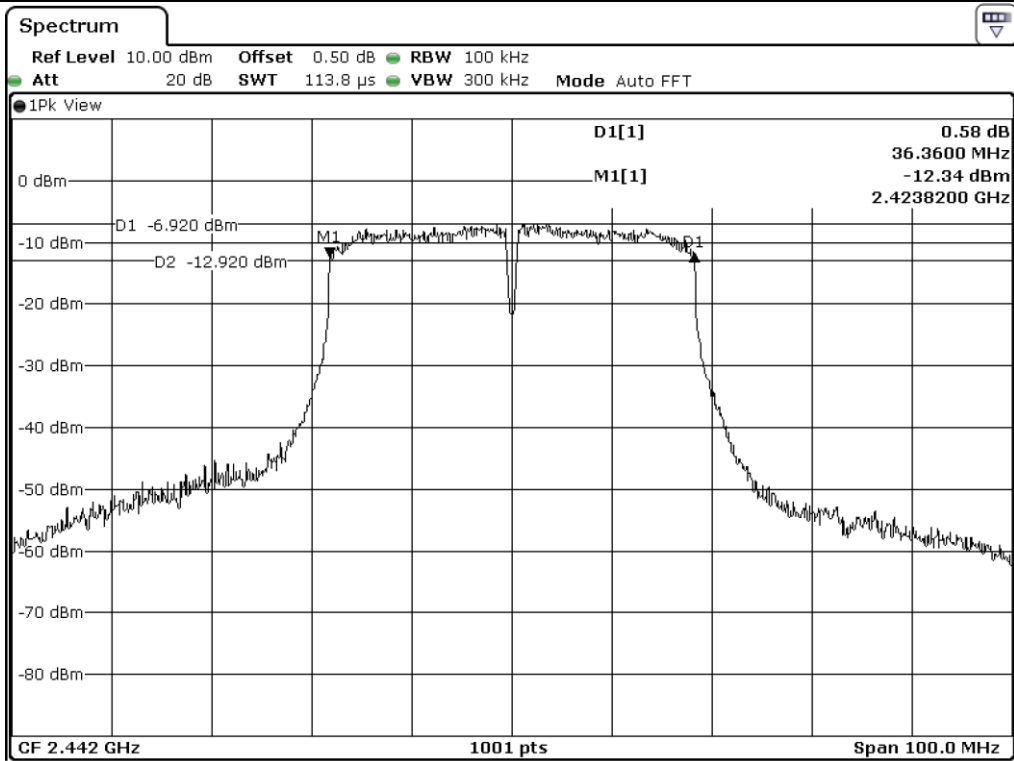

Middle Channel

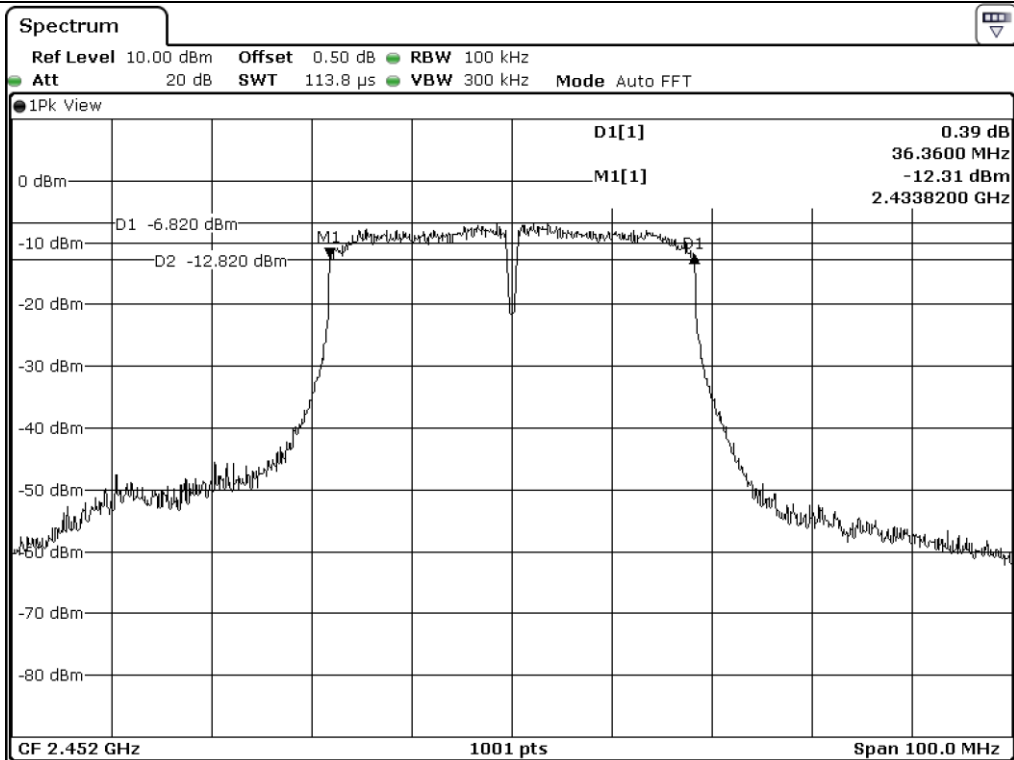

High Channel


8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 41 % R.H.

8.2 Test set-up

The maximum peak output power was measured with the wide band sensor connected to the antenna output of the EUT. The Wide Band Sensor is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section 9.2.3(KDB 558074 D01 DTS Meas Guidance V04). Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

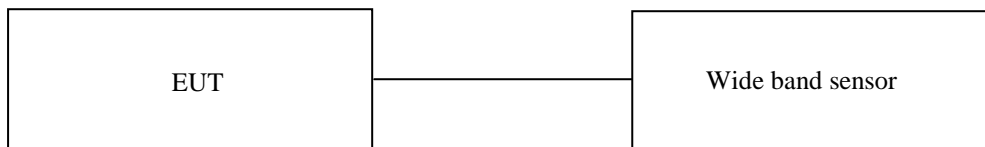

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - NRP-Z81	Rohde & Schwarz	Wide band Sensor	101975	April 04, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 802.11b WLAN Mode

8.4.1 Test data for Antenna 0

- Test Date : February 05, 2018 ~ February 09, 2018
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	12.78	30.00	17.22
MIDDLE	2 442.00	12.19	30.00	17.81
HIGH	2 462.00	11.68	30.00	18.32

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

8.4.2 Test data for Antenna 1

- Test Date : July 17, 2017
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	14.32	30.00	15.68
MIDDLE	2 442.00	13.85	30.00	16.15
HIGH	2 462.00	13.78	30.00	16.22

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.4.3 Test data for Multiple Antenna

- Test Date : February 05, 2018 ~ February 09, 2018
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.63	30.00	13.37
MIDDLE	2 442.00	16.11	30.00	13.89
HIGH	2 462.00	15.87	30.00	14.13

Remark 1 : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)}+10^{(\text{Antenna1 Output Power}/10)})$



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.5 Test data for 802.11g WLAN Mode

8.5.1 Test data for Antenna 0

- Test Date : February 05, 2018 ~ February 09, 2018
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	11.73	30.00	18.27
MIDDLE	2 442.00	11.56	30.00	18.44
HIGH	2 462.00	11.72	30.00	18.28

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

8.5.2 Test data for Antenna 1

- Test Date : July 17, 2017
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	12.84	30.00	17.16
MIDDLE	2 442.00	12.68	30.00	17.32
HIGH	2 462.00	12.59	30.00	17.41

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.5.3 Test data for Multiple Antenna

- Test Date : February 05, 2018 ~ February 09, 2018
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	15.33	30.00	14.67
MIDDLE	2 442.00	15.17	30.00	14.83
HIGH	2 462.00	15.19	30.00	14.81

Remark 1 : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)}+10^{(\text{Antenna1 Output Power}/10)})$



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.6 Test data for 802.11n_HT20 WLAN Mode

8.6.1 Test data for Antenna 0

- Test Date : February 05, 2018 ~ February 09, 2018
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	10.96	30.00	19.04
MIDDLE	2 442.00	10.27	30.00	19.73
HIGH	2 462.00	10.29	30.00	19.71

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

8.6.2 Test data for Antenna 1

- Test Date : July 17, 2017
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	10.73	30.00	19.27
MIDDLE	2 442.00	10.82	30.00	19.18
HIGH	2 462.00	10.83	30.00	19.17

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.6.3 Test data for Multiple Antenna

- . Test Date : February 05, 2018 ~ February 09, 2018
- . Test Result : Pass
- . Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	13.86	30.00	16.14
MIDDLE	2 442.00	13.56	30.00	16.44
HIGH	2 462.00	13.58	30.00	16.42

Remark 1 : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)}+10^{(\text{Antenna1 Output Power}/10)})$



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.7 Test data for 802.11n_HT40 WLAN Mode

8.7.1 Test data for Antenna 0

- Test Date : February 05, 2018 ~ February 09, 2018
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	9.95	30.00	20.05
MIDDLE	2 442.00	9.80	30.00	20.20
HIGH	2 452.00	10.16	30.00	19.84

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

8.7.2 Test data for Antenna 1

- Test Date : July 17, 2017
- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	10.68	30.00	19.32
MIDDLE	2 442.00	10.75	30.00	19.25
HIGH	2 452.00	10.77	30.00	19.23

Remark : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.7.3 Test data for Multiple Antenna

- . Test Date : February 05, 2018 ~ February 09, 2018
- . Test Result : Pass
- . Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	13.34	30.00	16.66
MIDDLE	2 442.00	13.31	30.00	16.69
HIGH	2 452.00	13.49	30.00	16.51

Remark 1 : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)}+10^{(\text{Antenna1 Output Power}/10)})$



Tested by: Hyung-Kwon, Oh / Assistant Manager


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 41 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

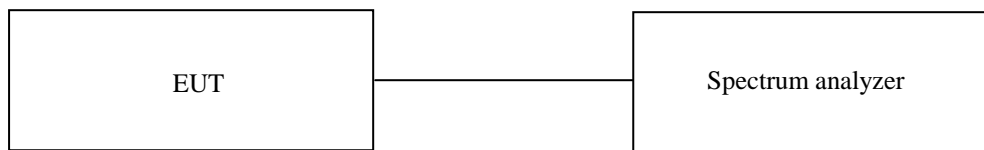

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 06, 2017 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2017 (1Y)
■ - BBV9718	Schwarzbeck	Amplifier	310	Sep. 01, 2017 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Apr. 04, 2017 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	May 26, 2017 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Dec. 04, 2017 (2Y)

All test equipment used is calibrated on a regular basis.


9.5 Test data for conducted emission

9.5.1 Test data for 802.11b WLAN Mode


9.5.1.1 Test data for Antenna 0

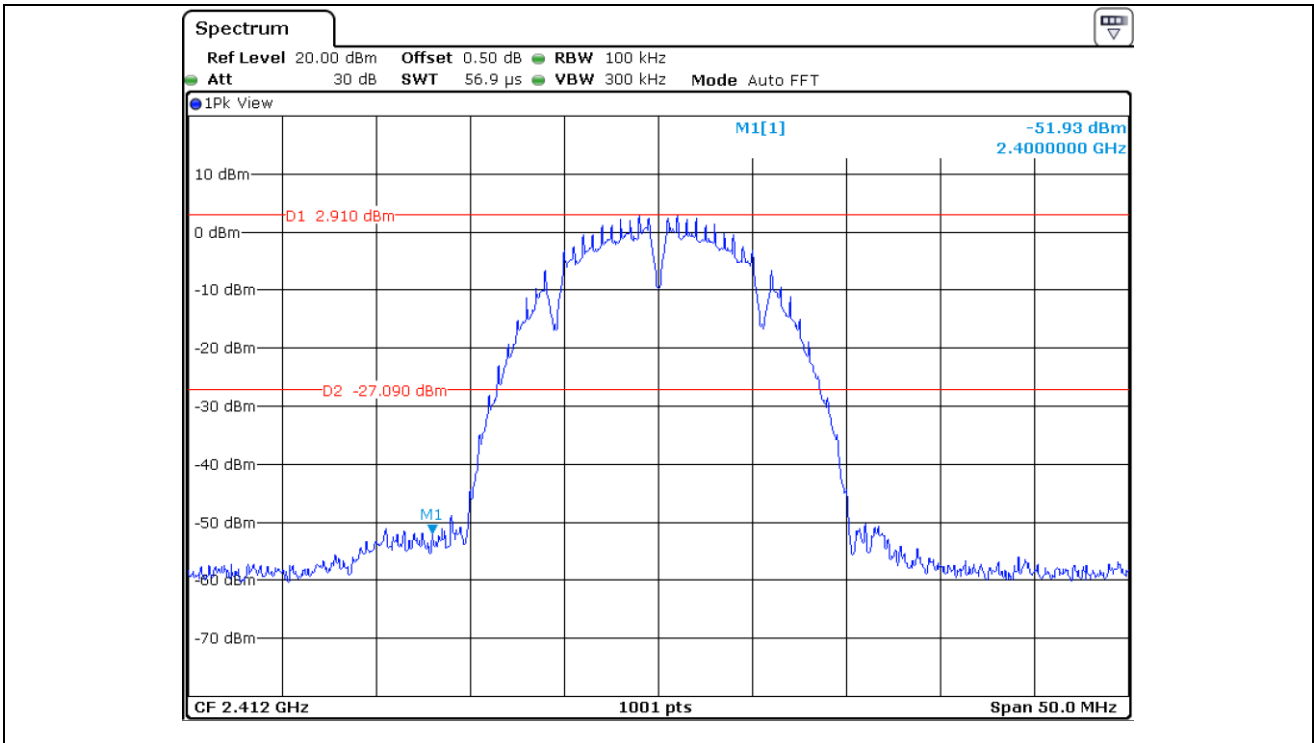


Low Channel

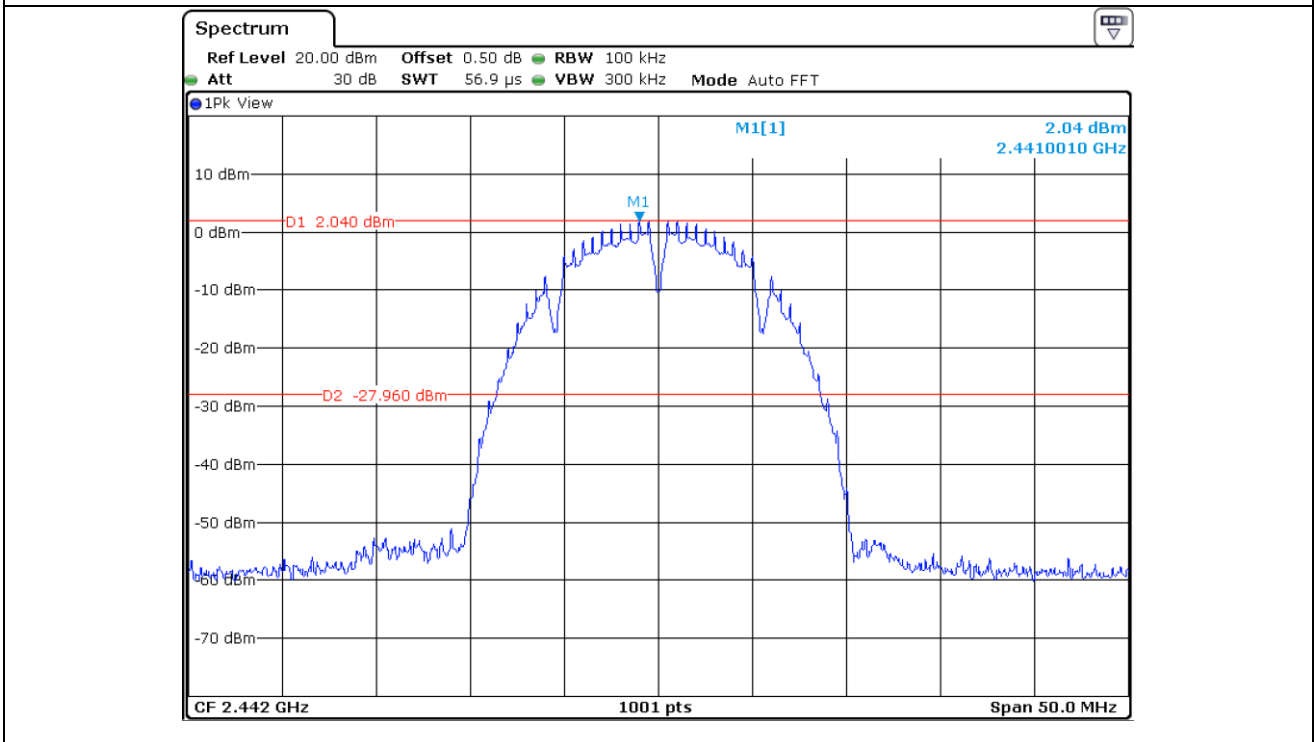


Middle Channel

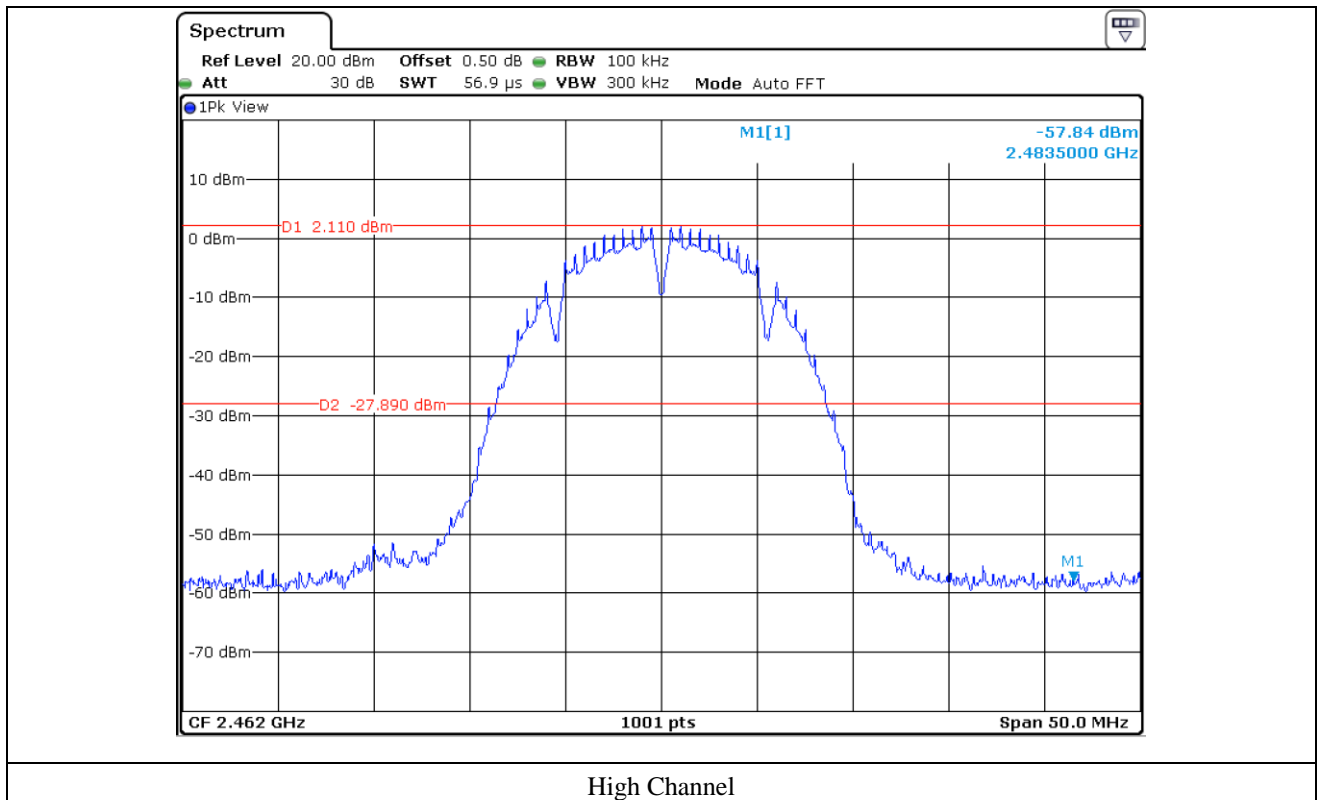


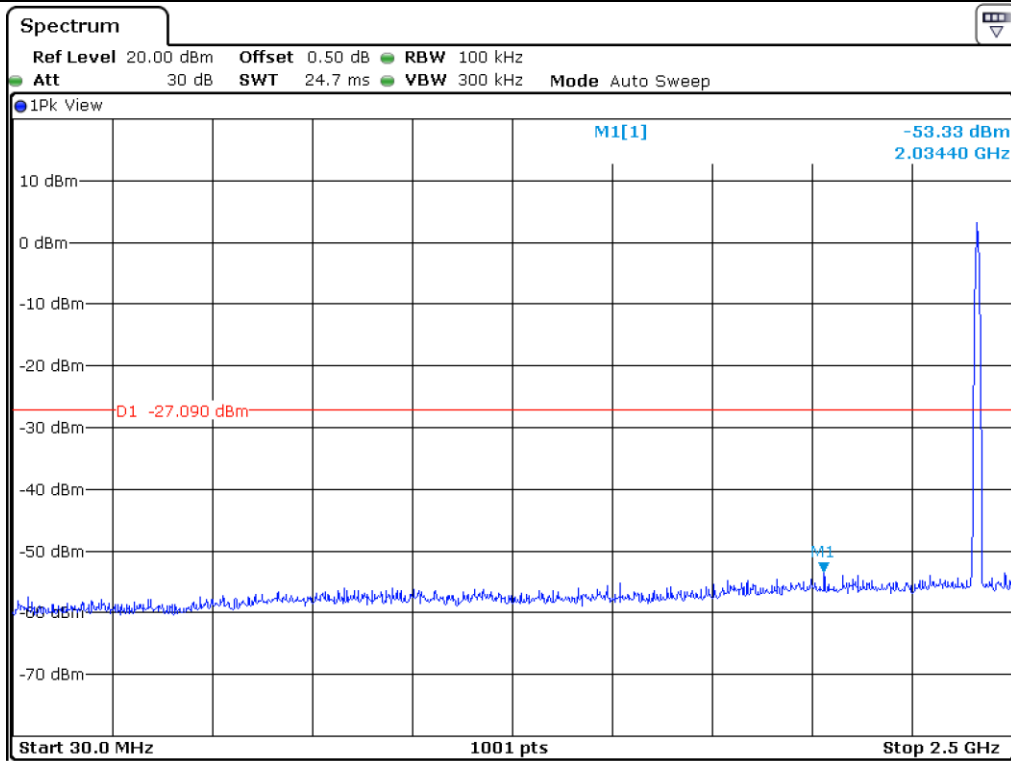


Low Channel

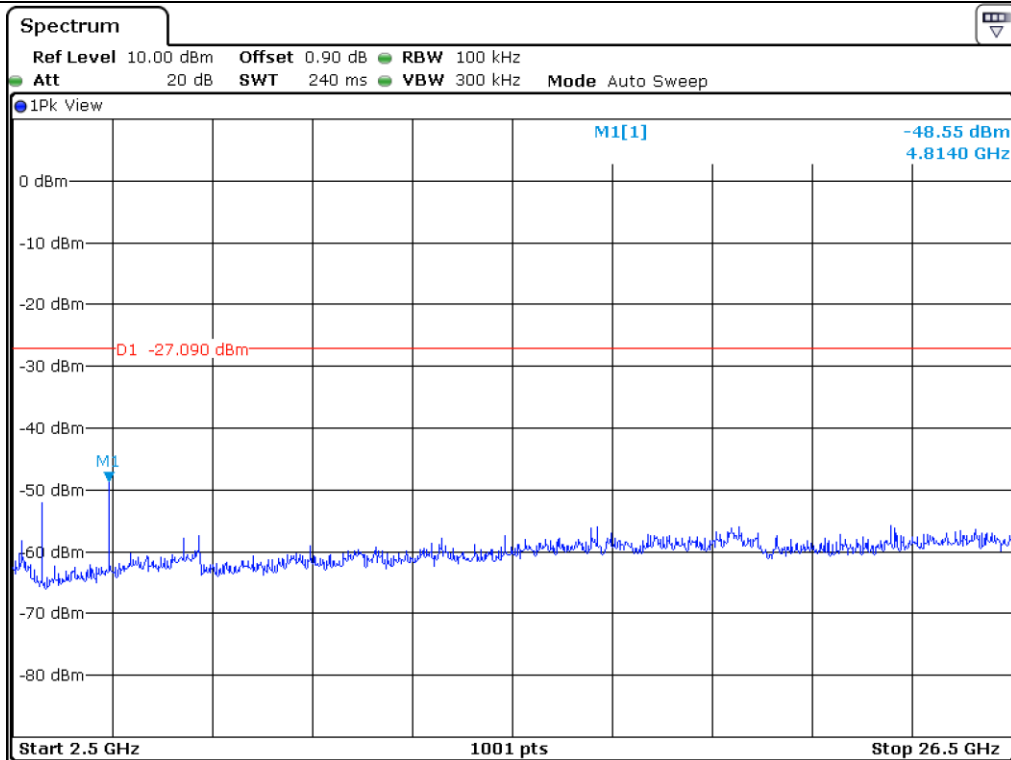


Low Channel

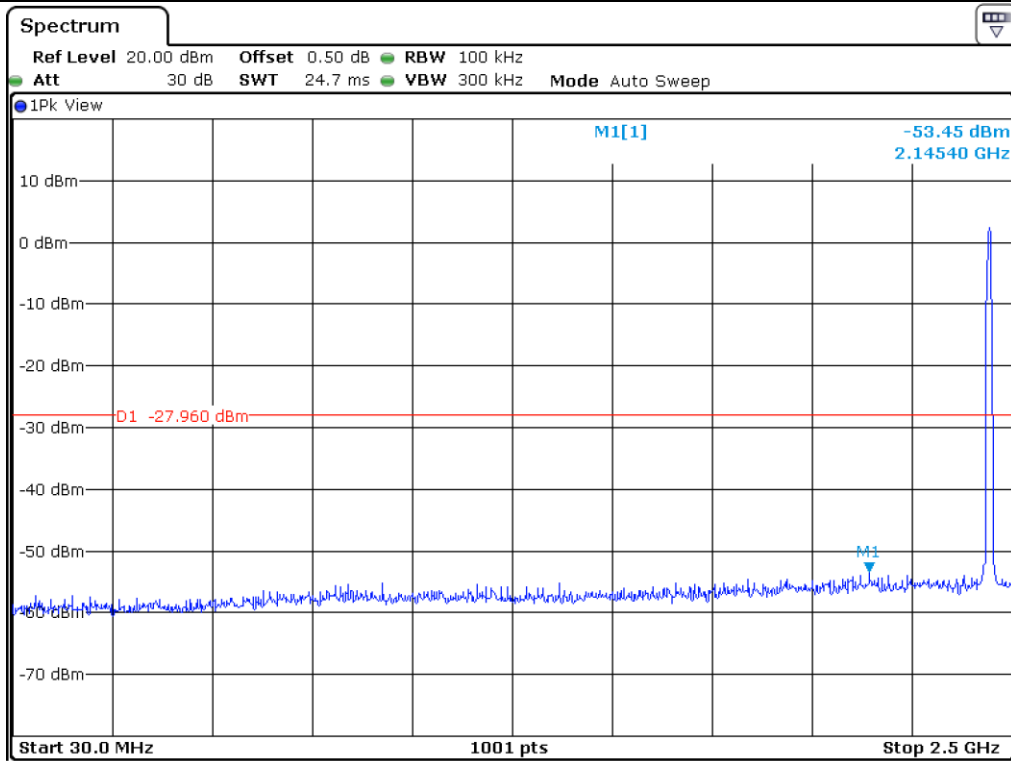


Middle Channel

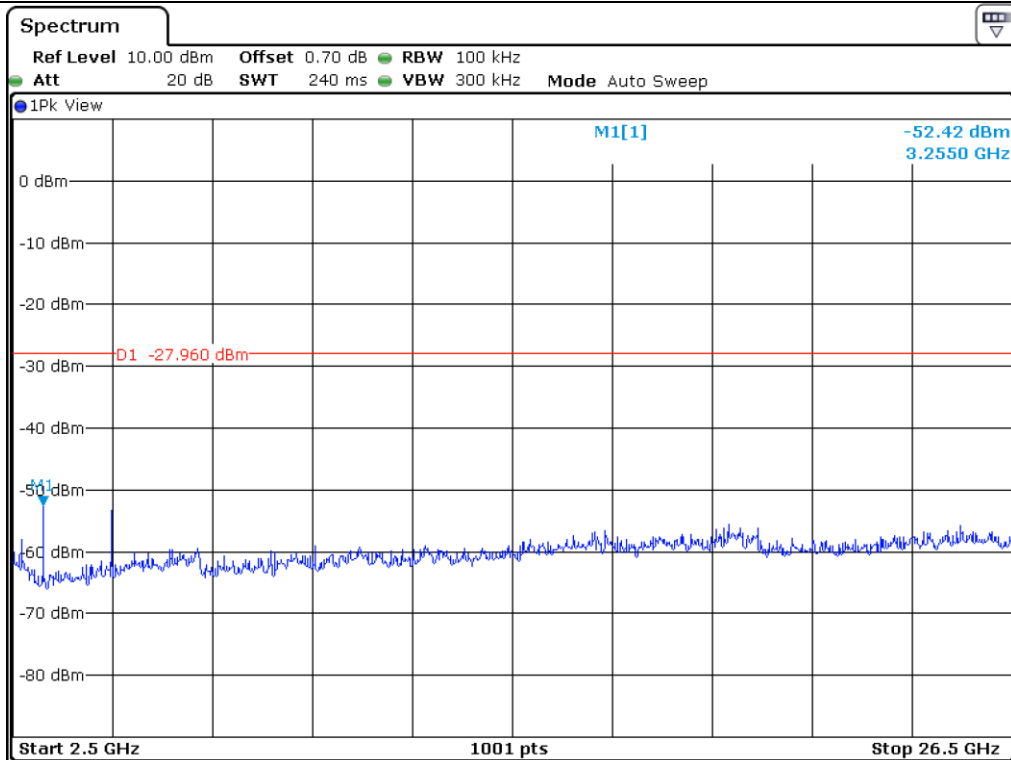

Middle Channel

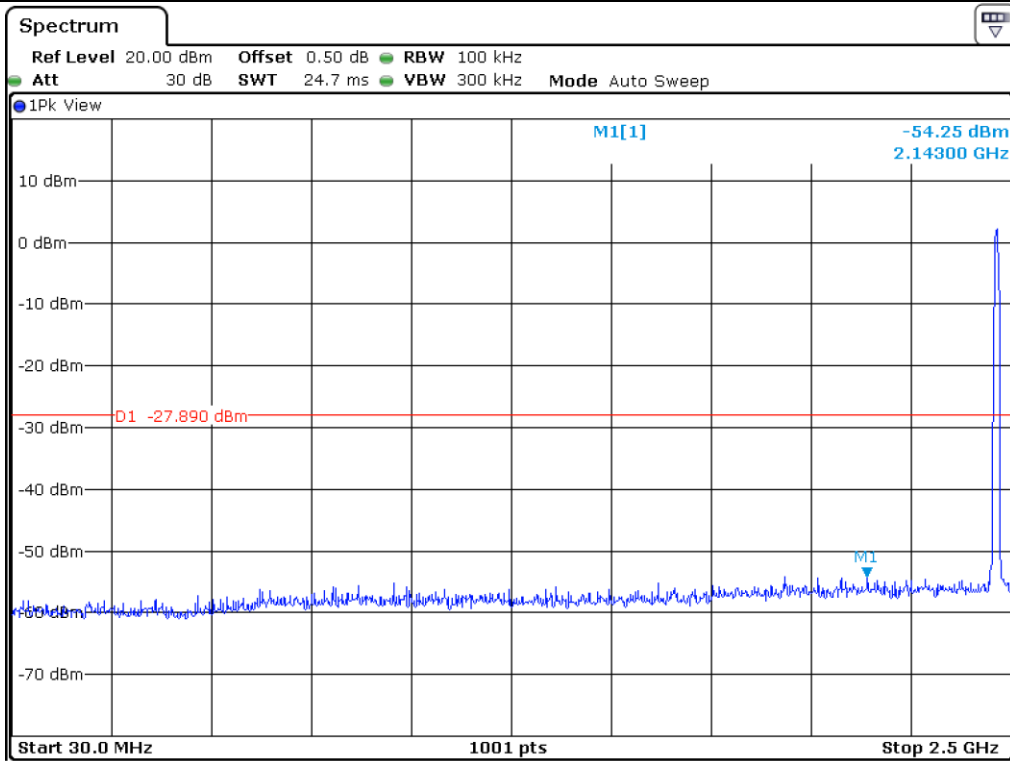


High Channel

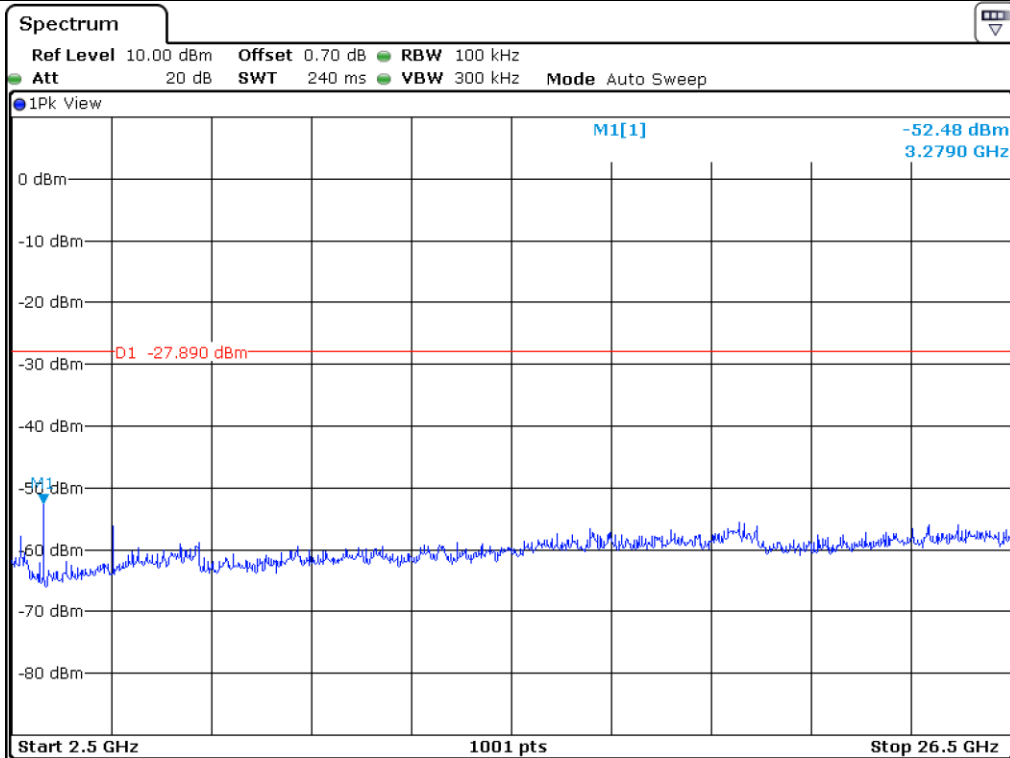


High Channel


9.5.1.2 Test data for Antenna 1

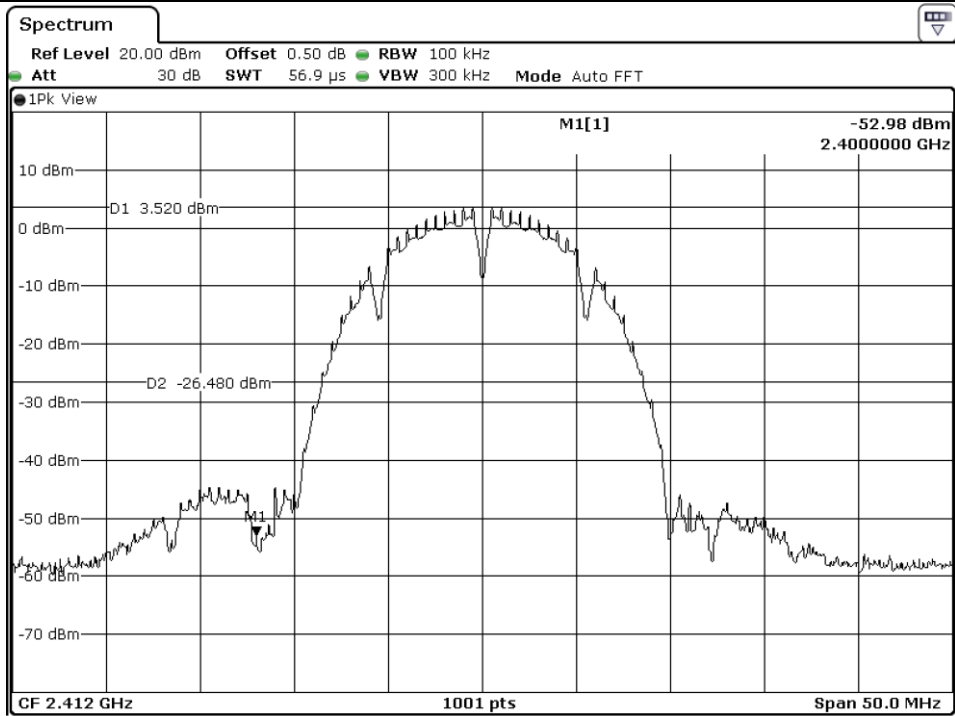


Low Channel

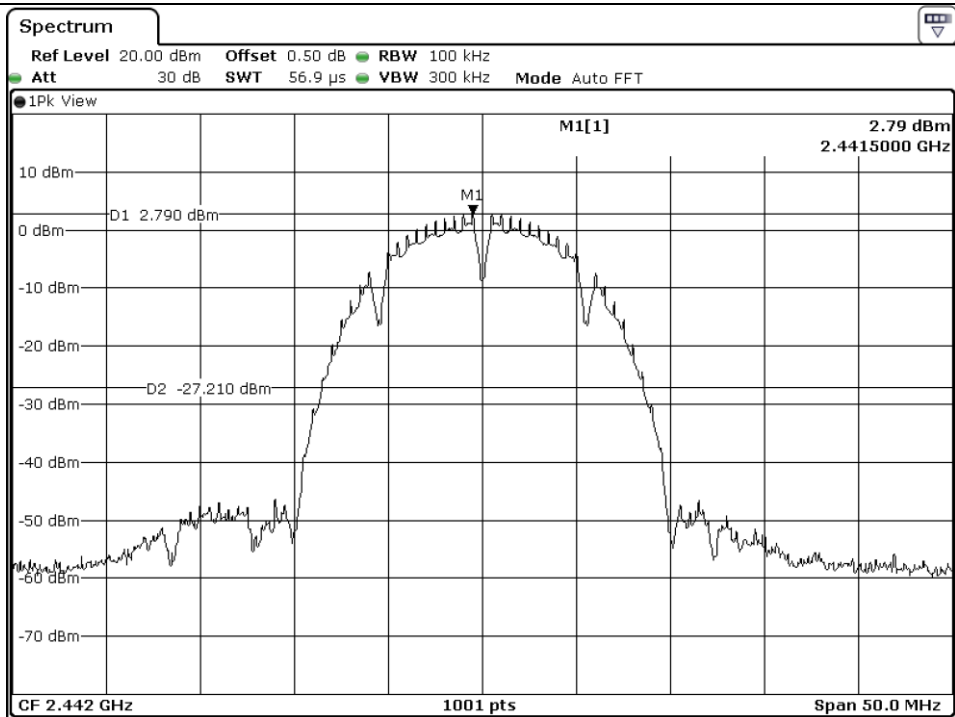


Middle Channel

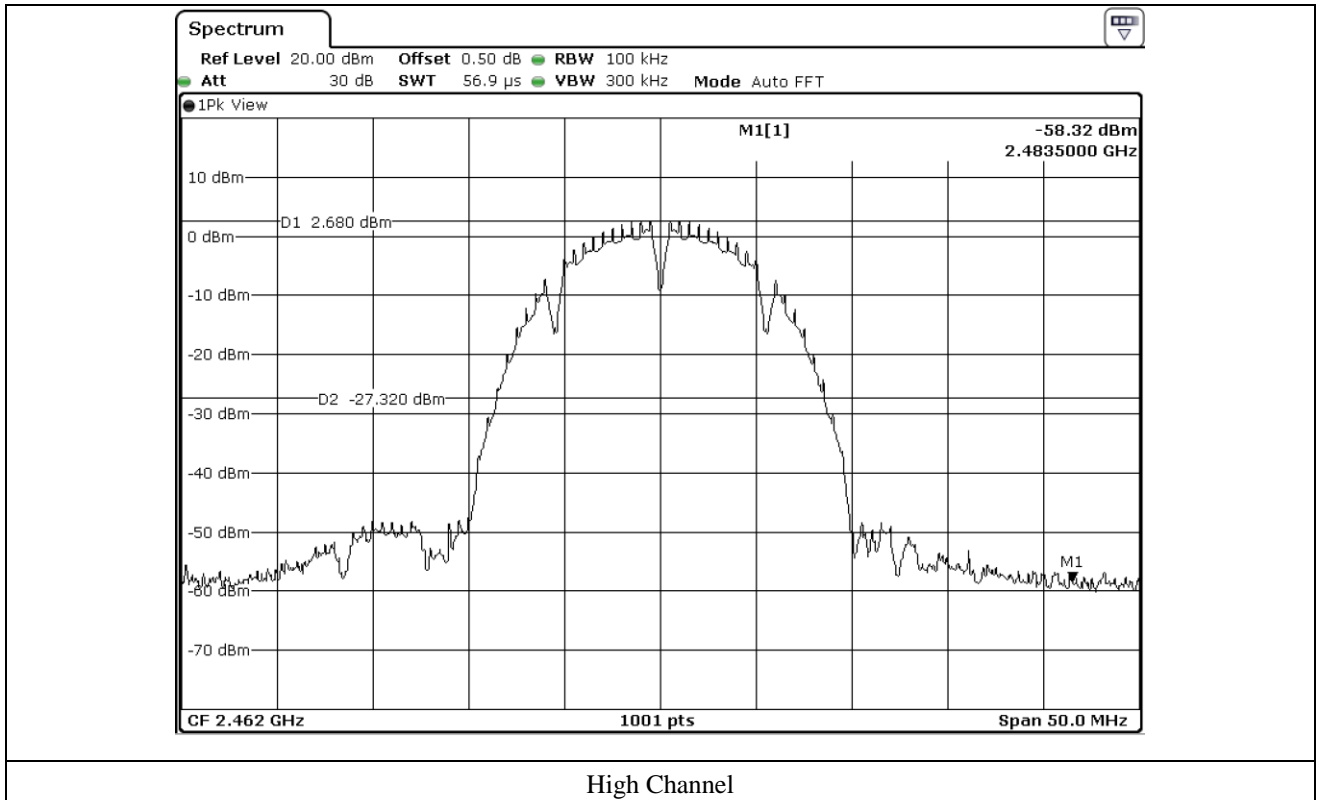


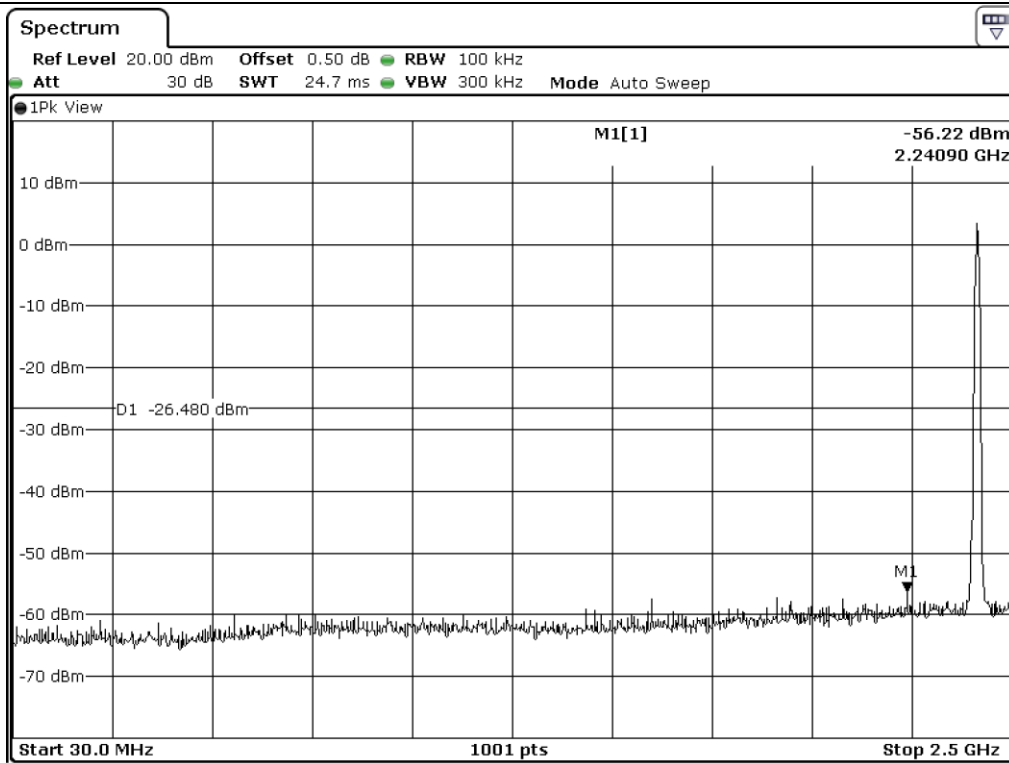


Low Channel

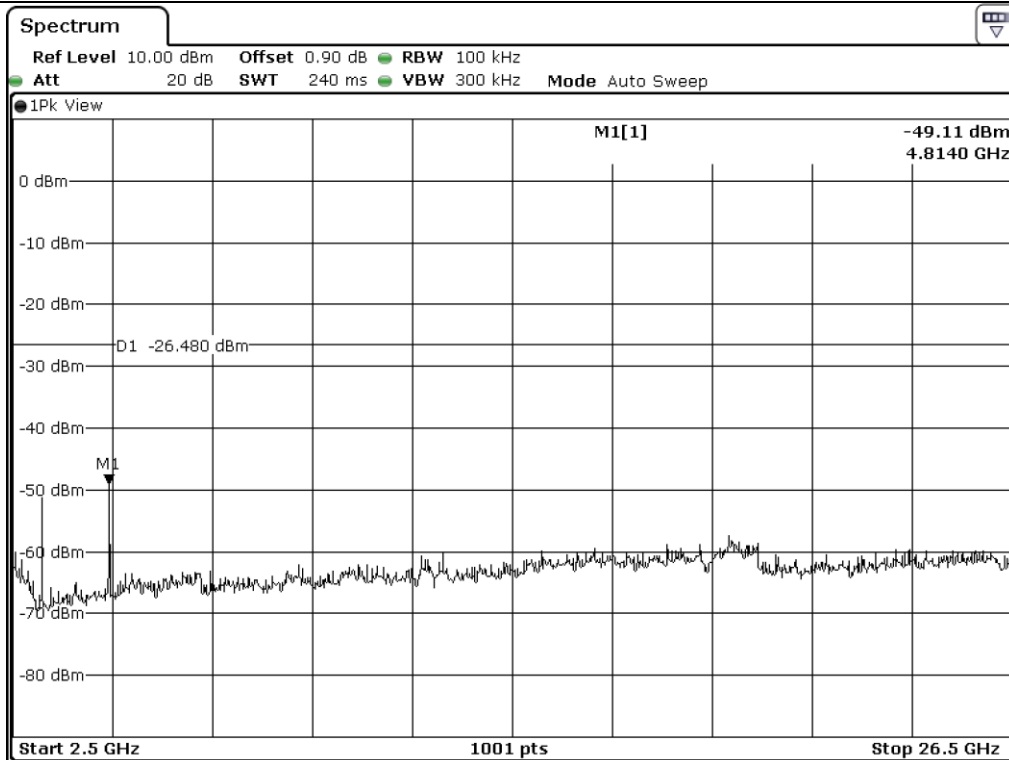


Low Channel

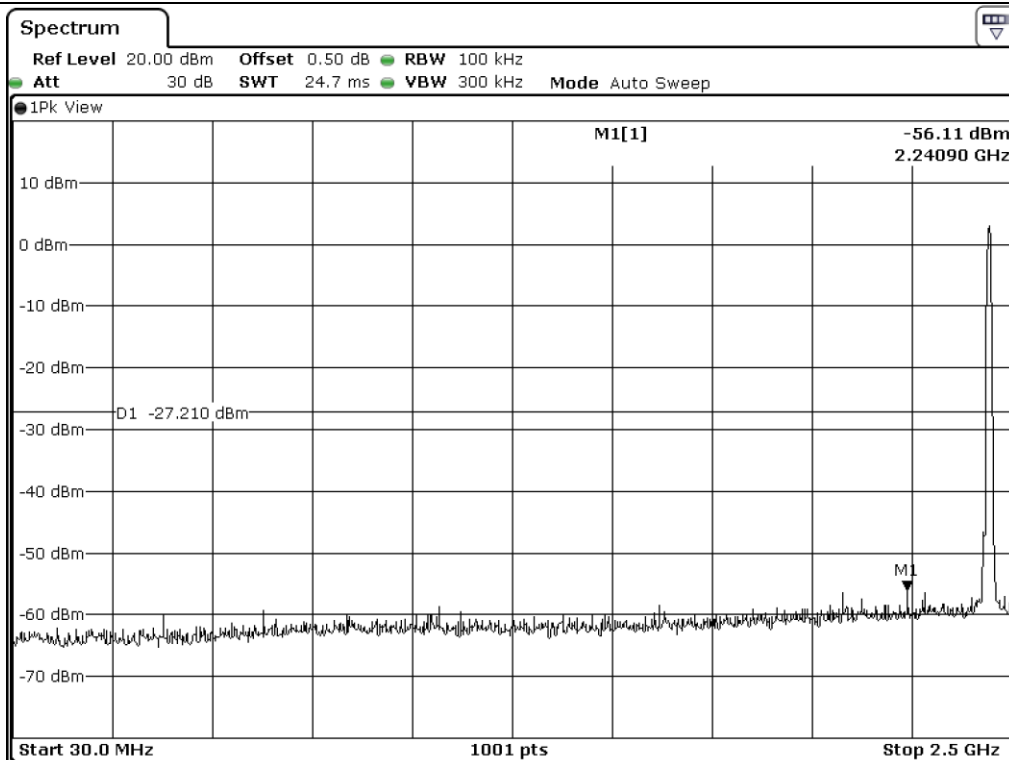


Middle Channel

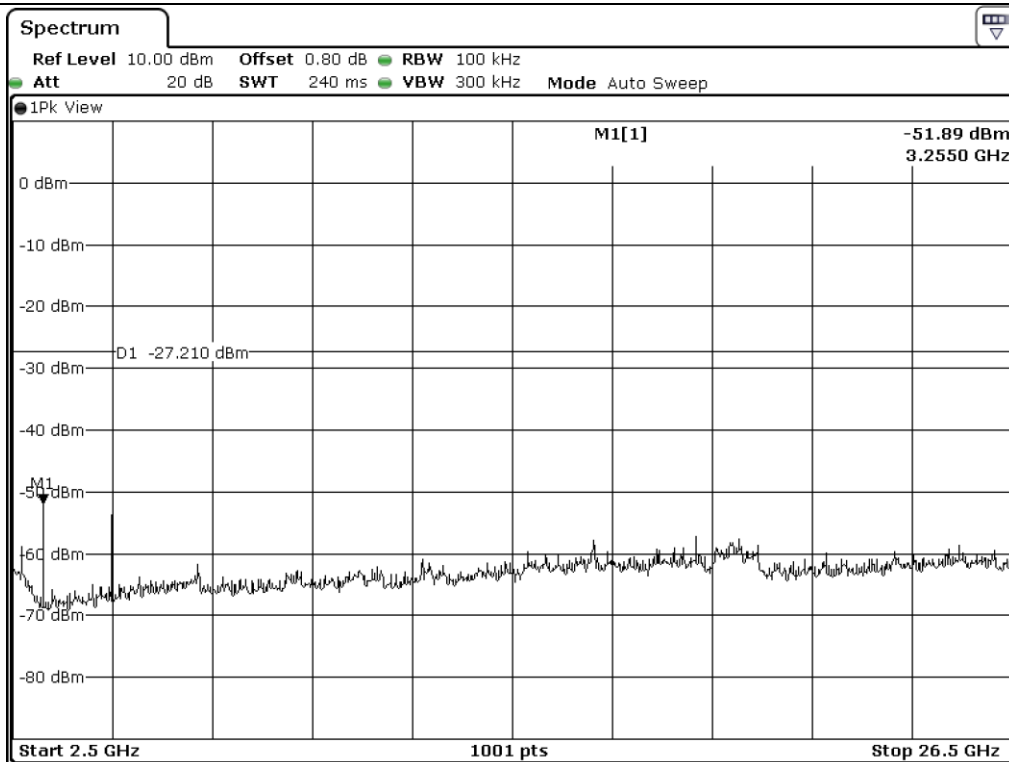

Middle Channel

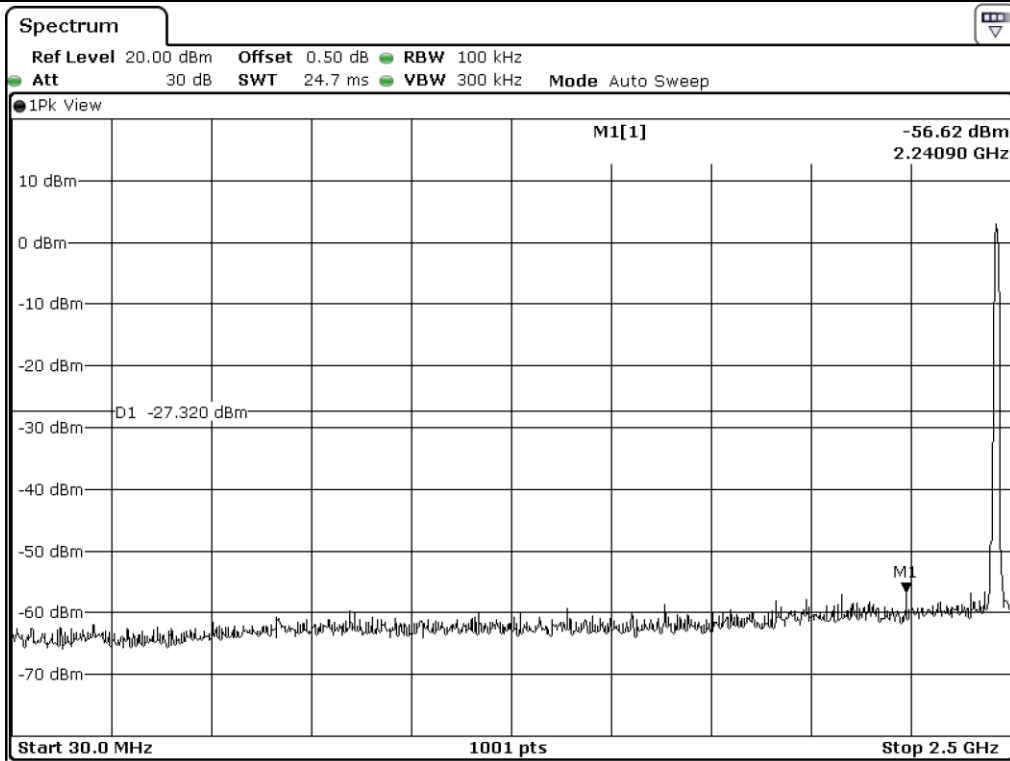


High Channel

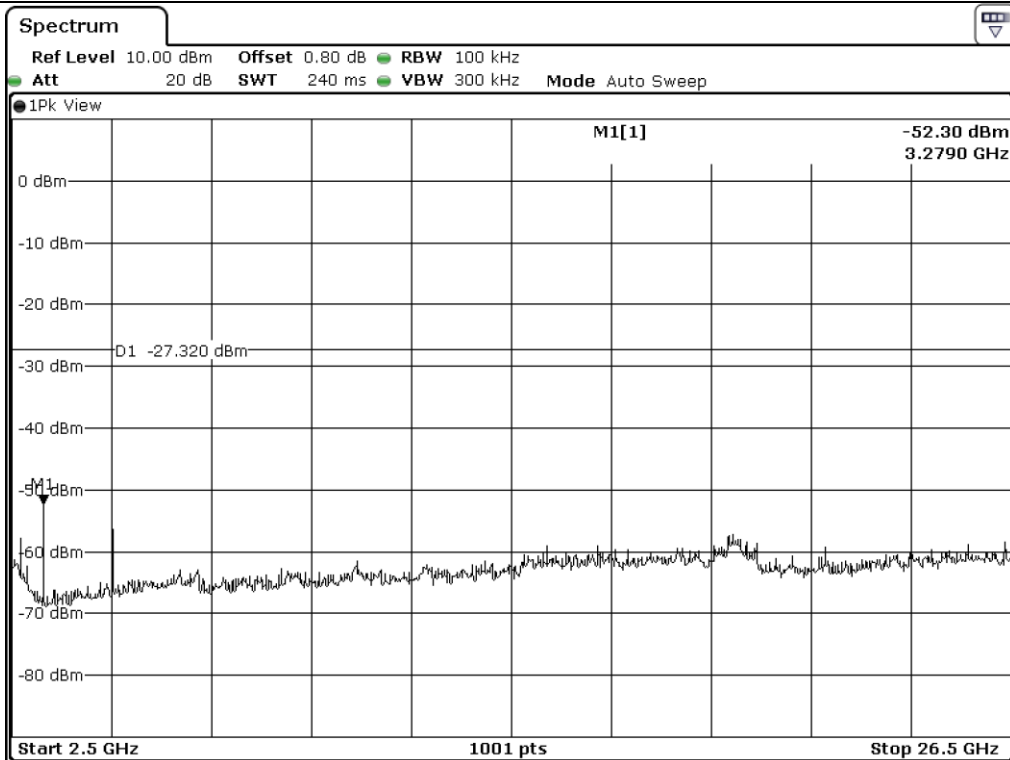


High Channel

9.5.2 Test data for 802.11g WLAN Mode


9.5.2.1 Test data for Antenna 0

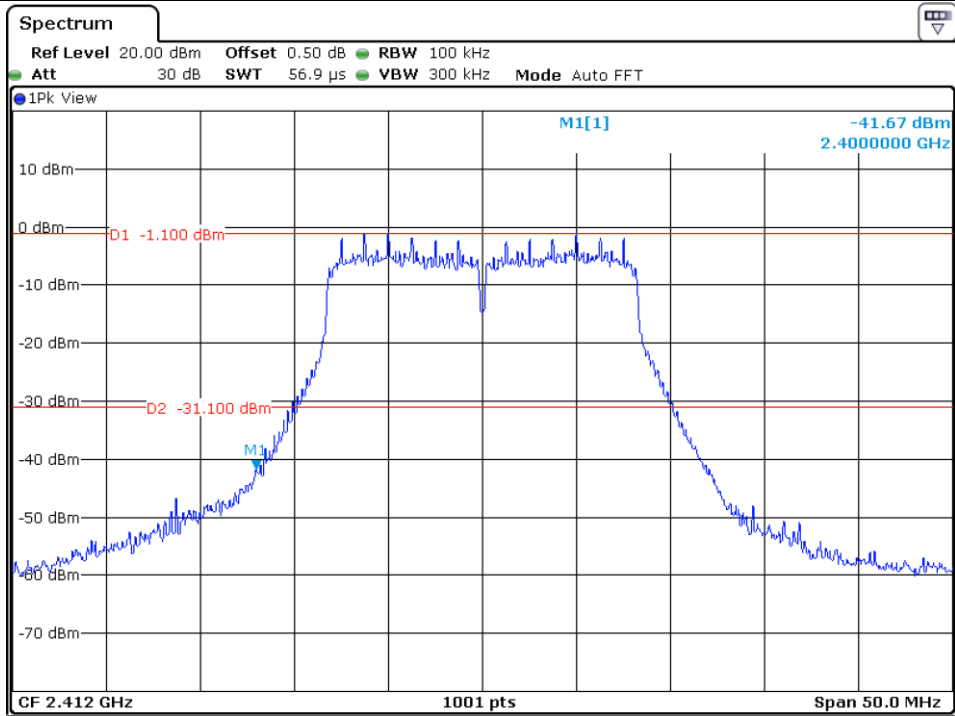


Low Channel

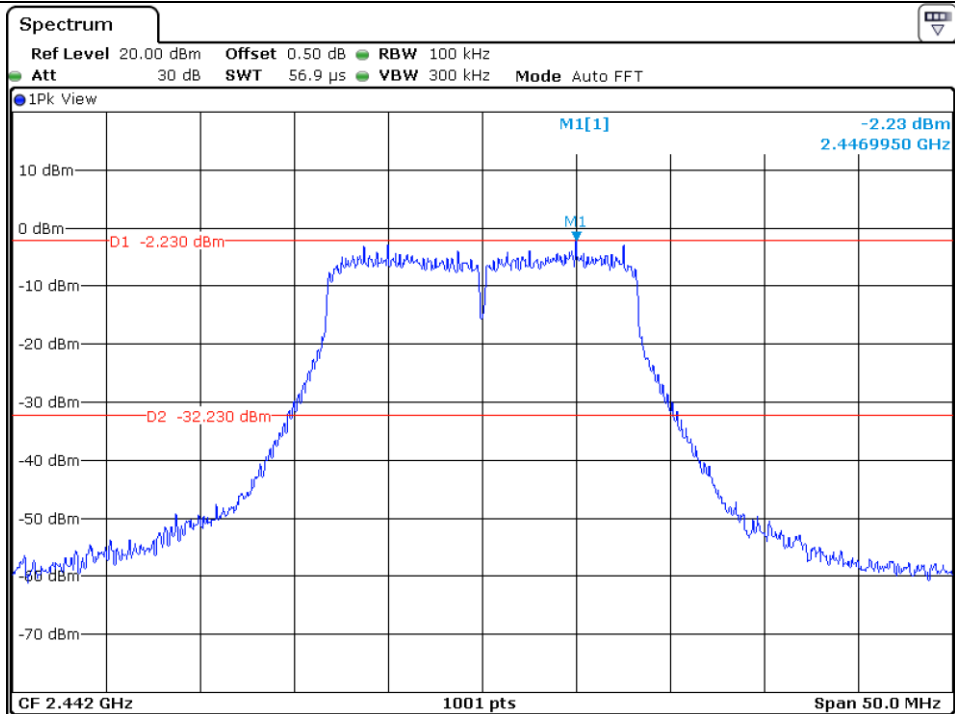


Middle Channel

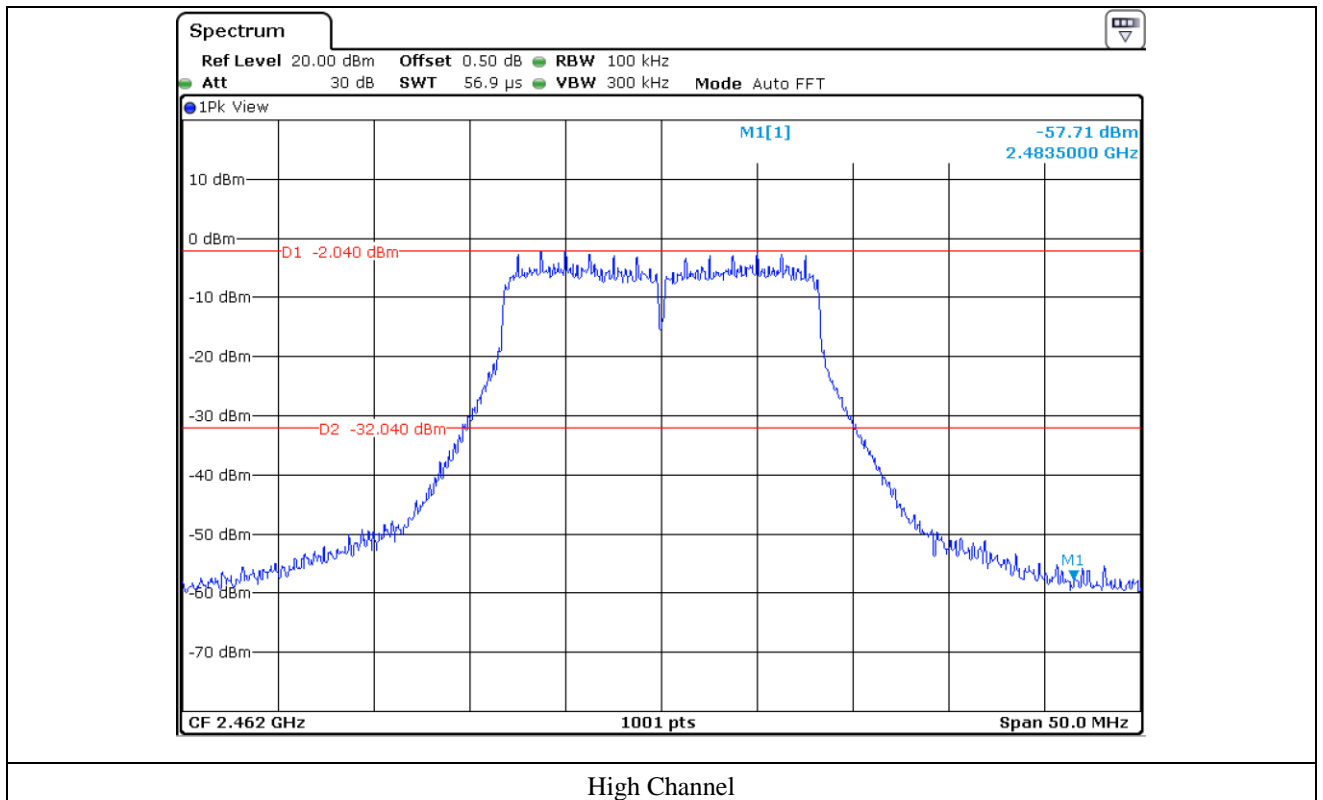


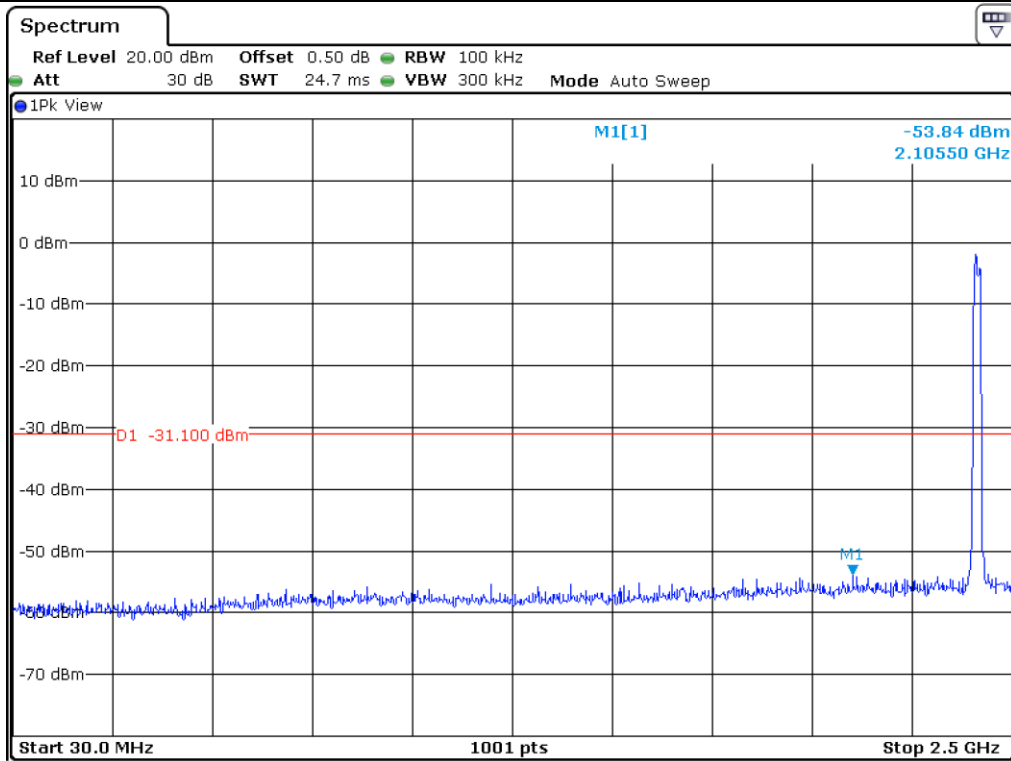


Low Channel

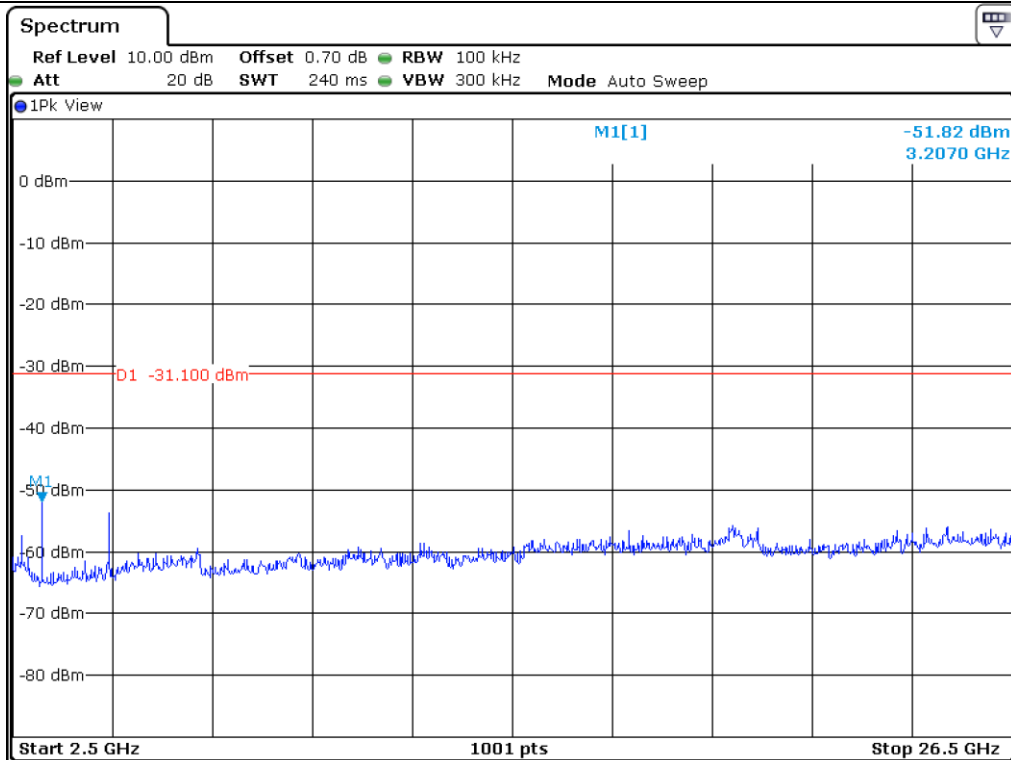


Low Channel

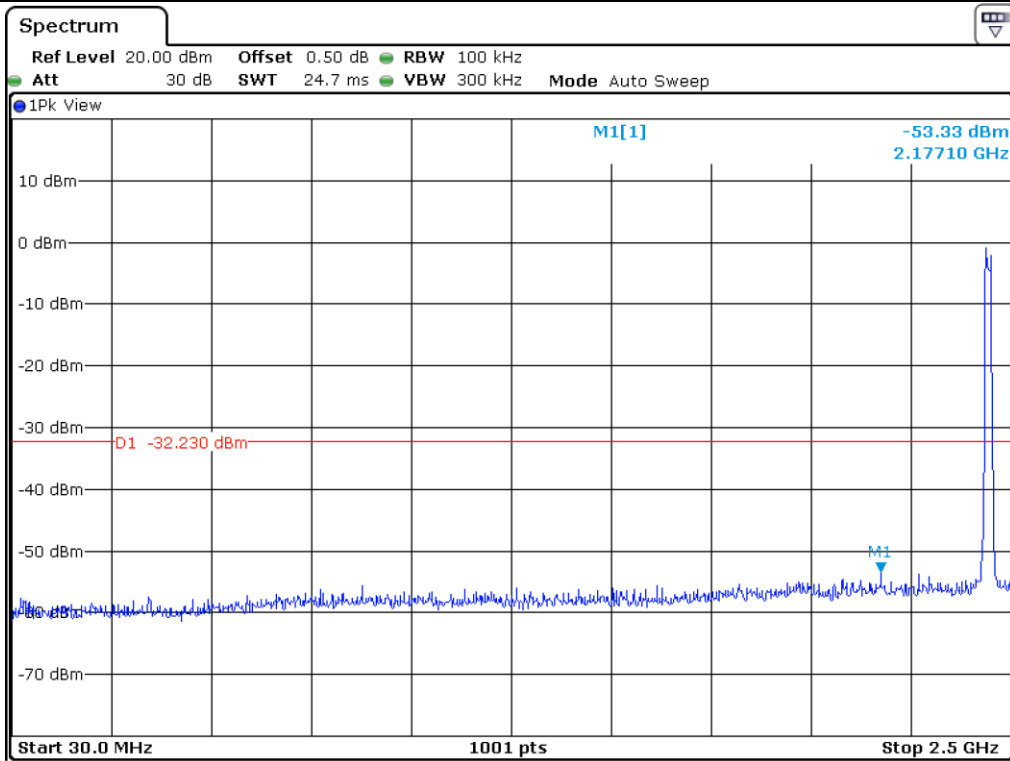


Middle Channel

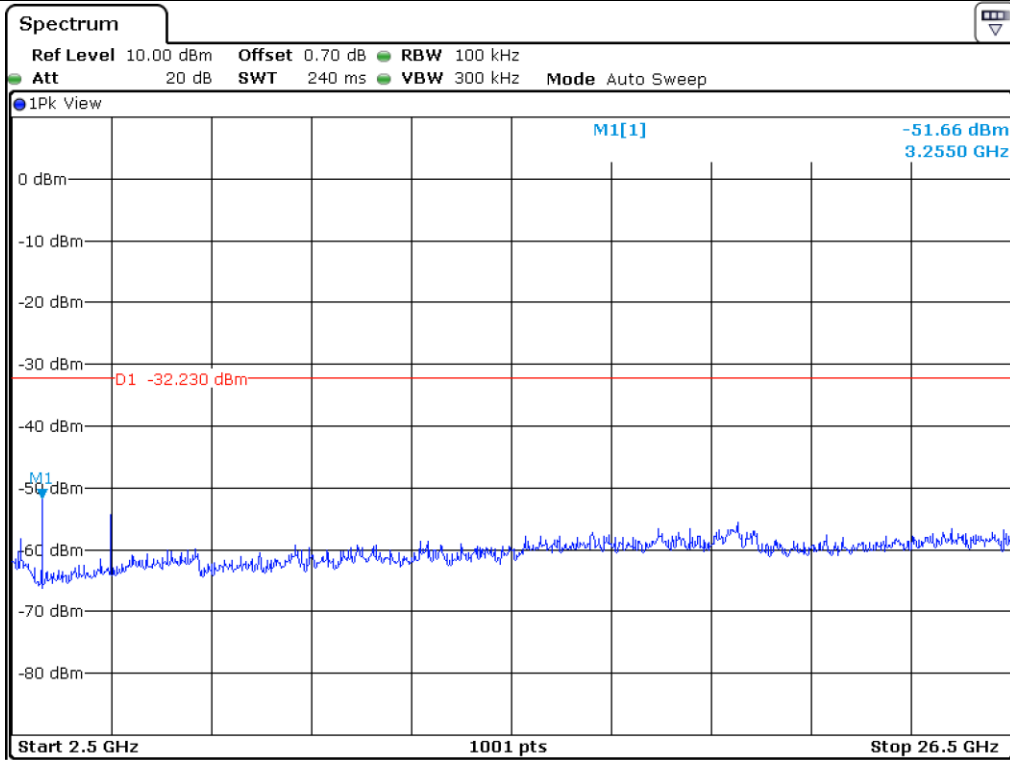

Middle Channel

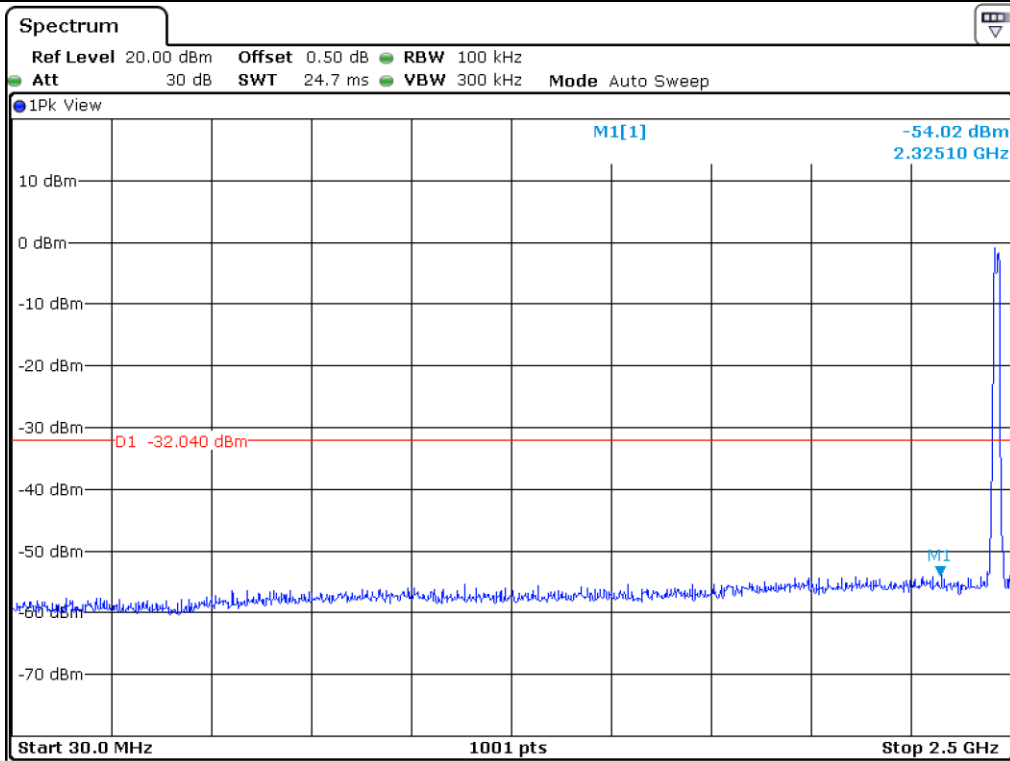


High Channel

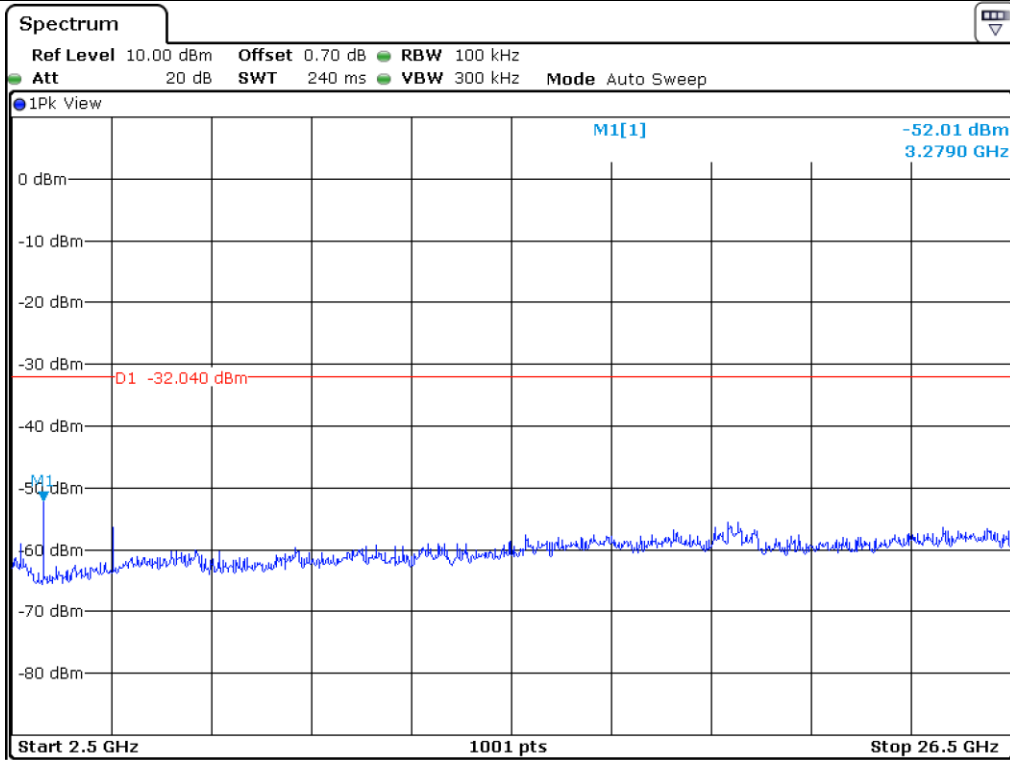


High Channel


9.5.2.2 Test data for Antenna 1

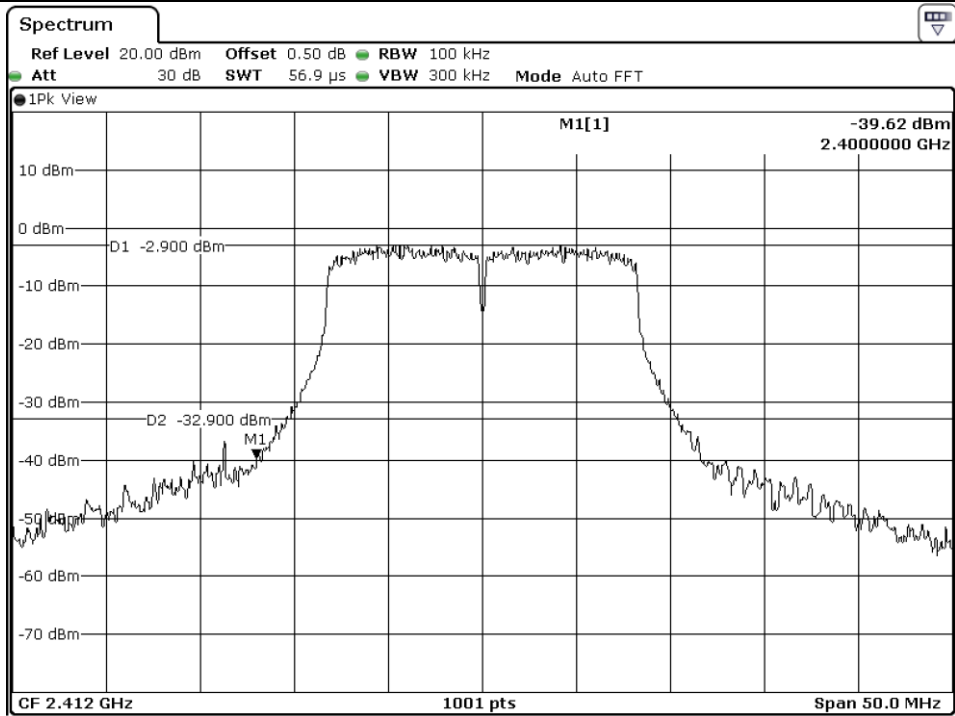


Low Channel

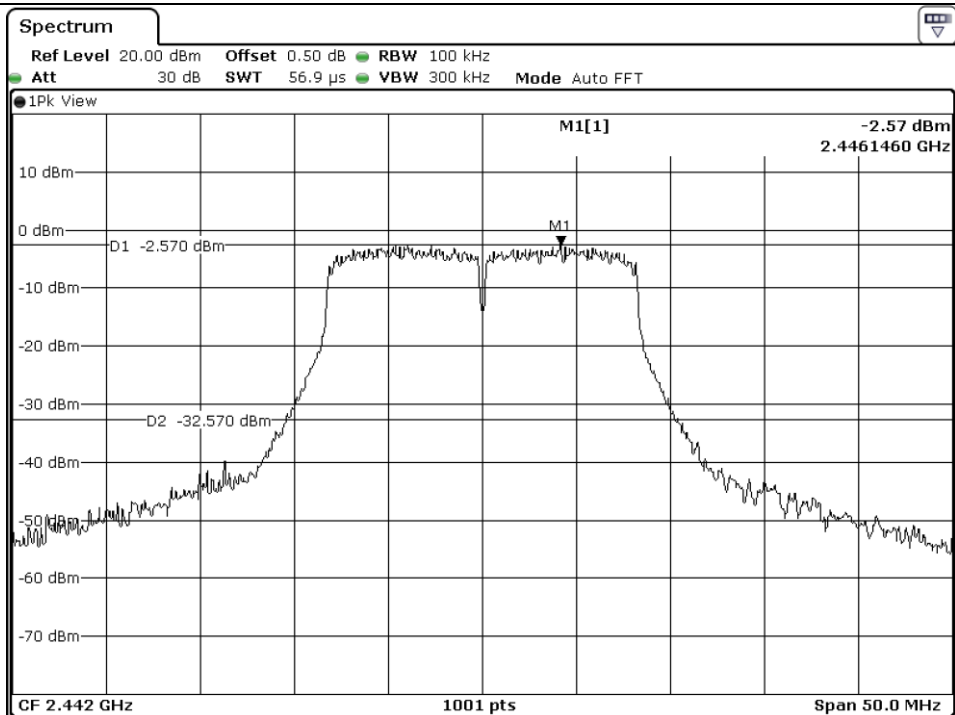


Middle Channel

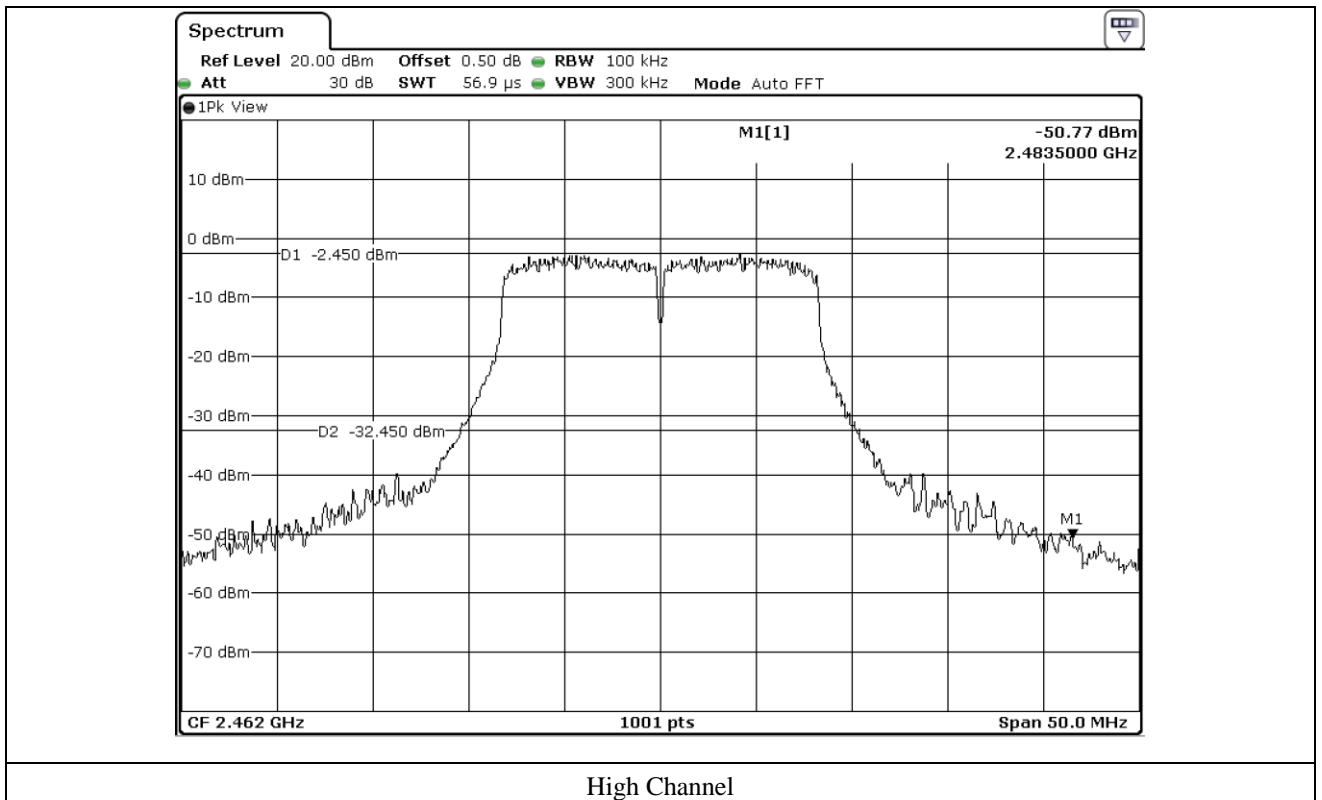


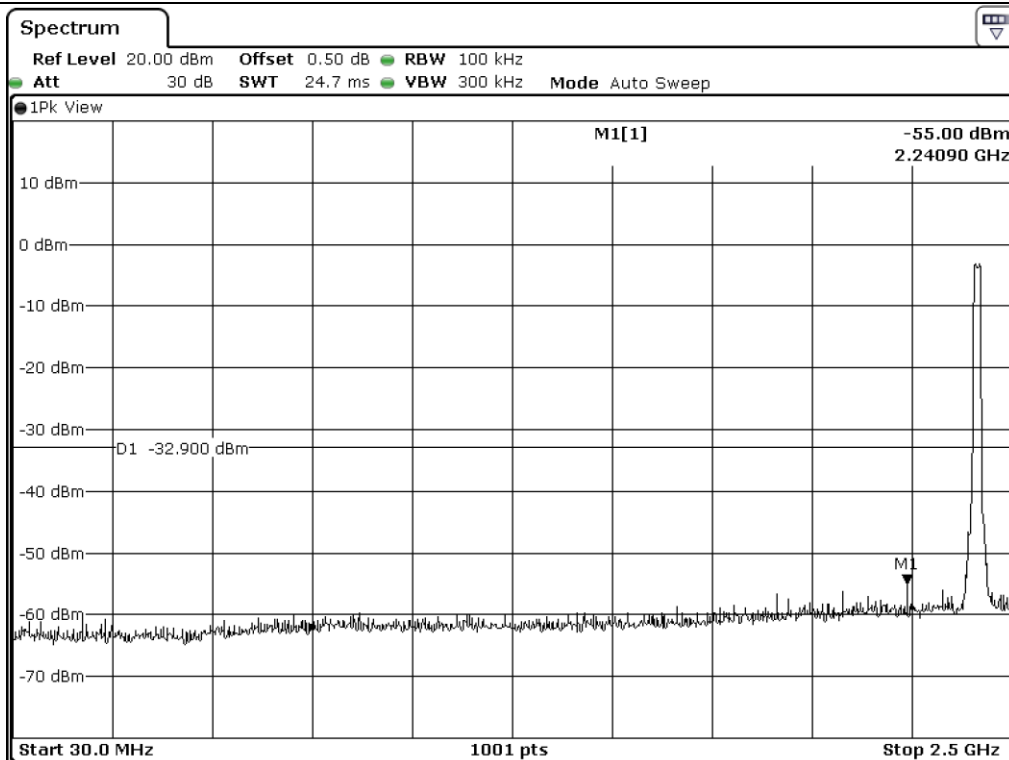


Low Channel

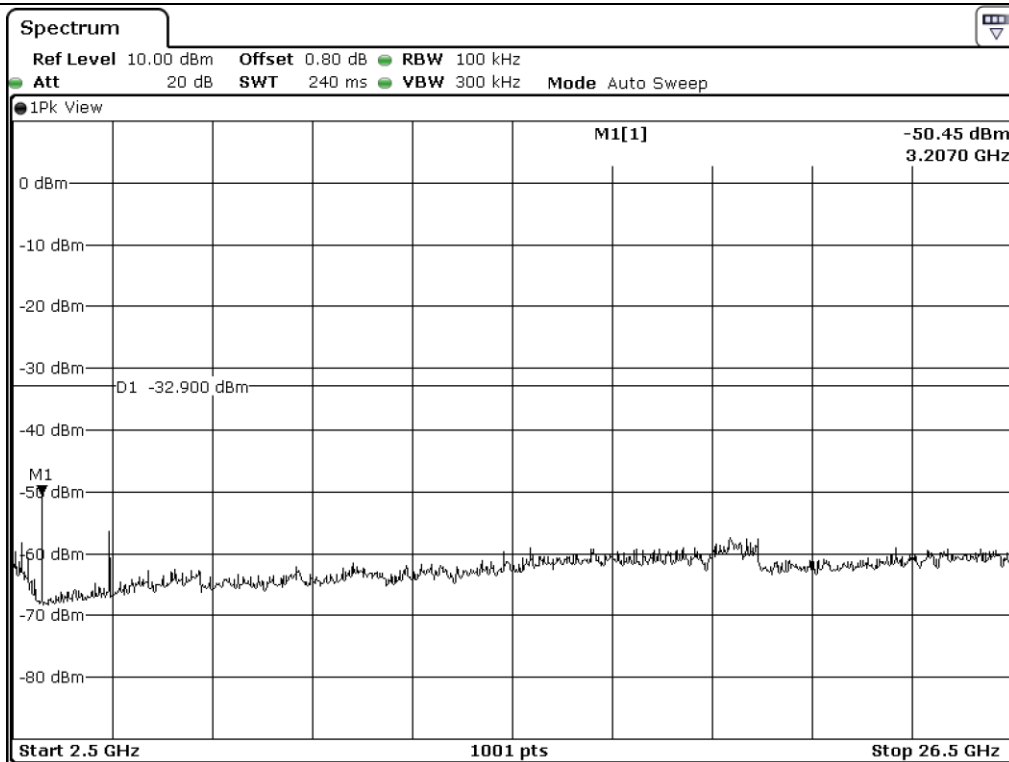


Low Channel

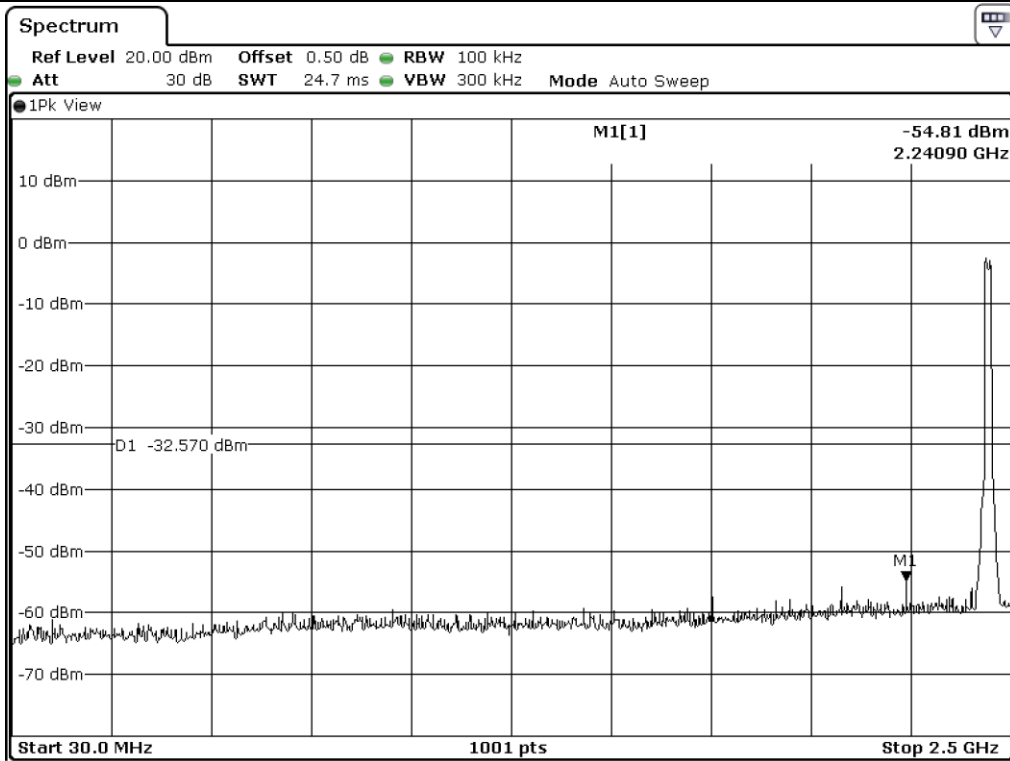


Middle Channel

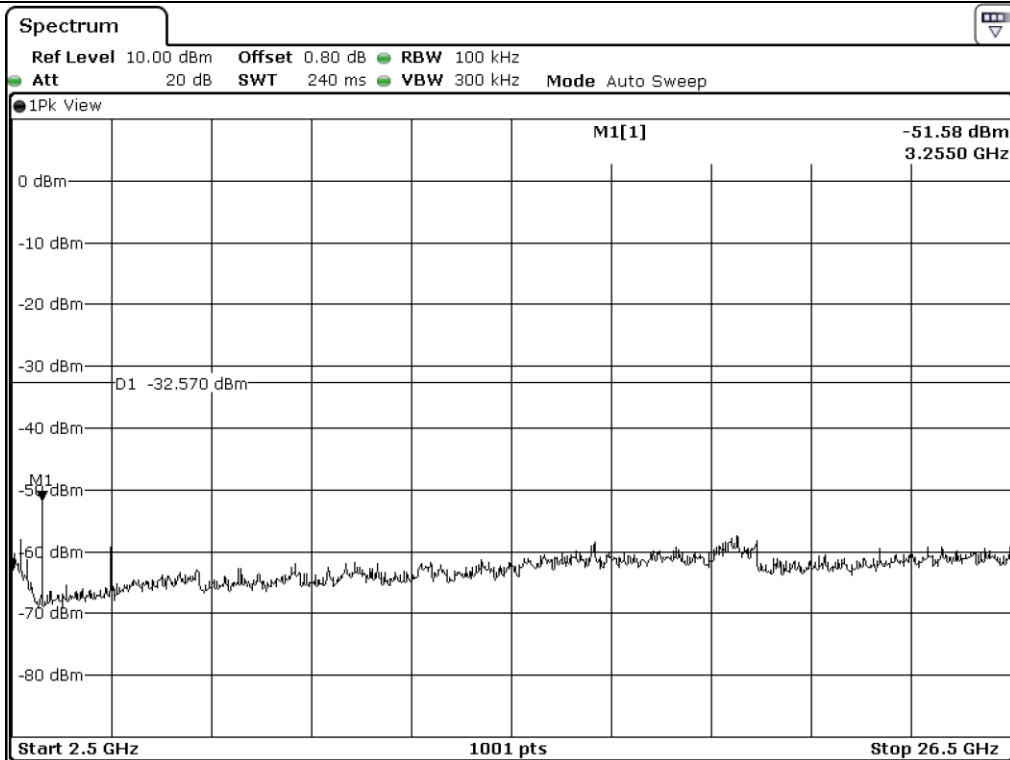

Middle Channel

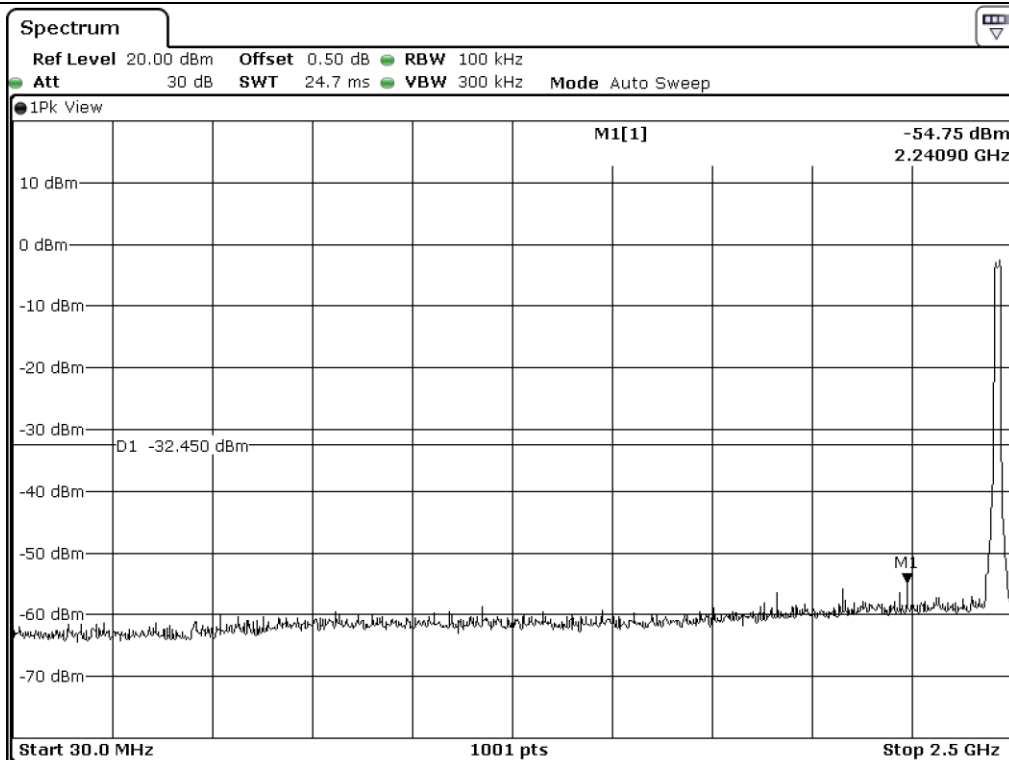


High Channel

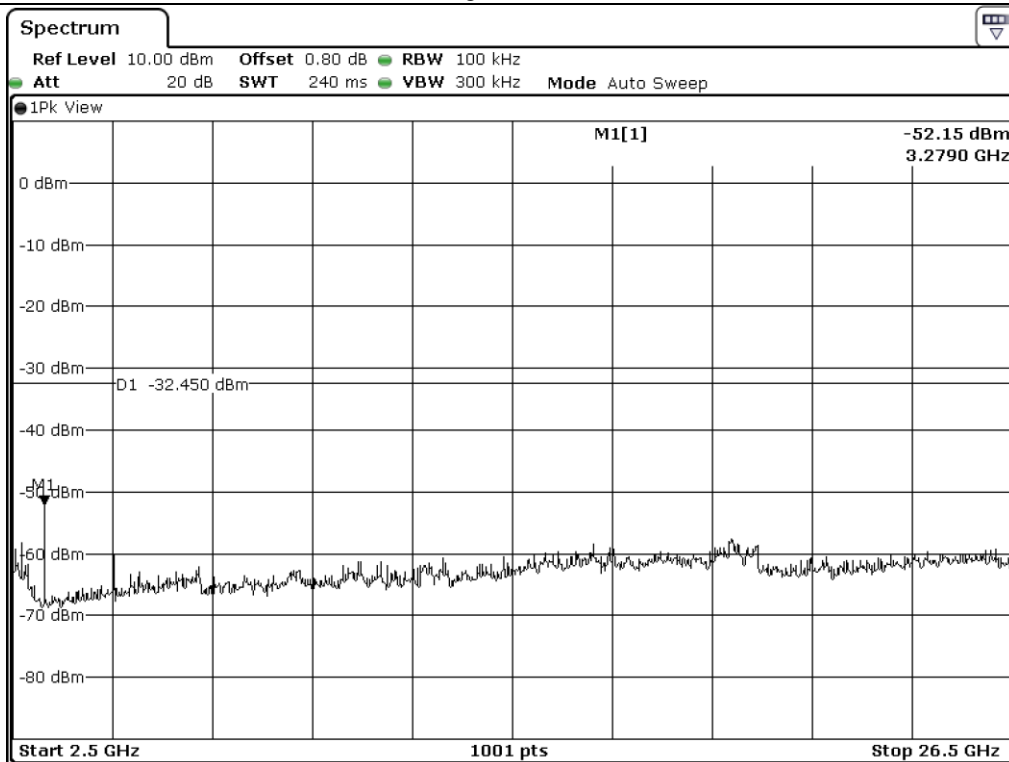


High Channel

9.5.3 Test data for 802.11n_HT20 WLAN Mode


9.5.3.1 Test data for Antenna 0

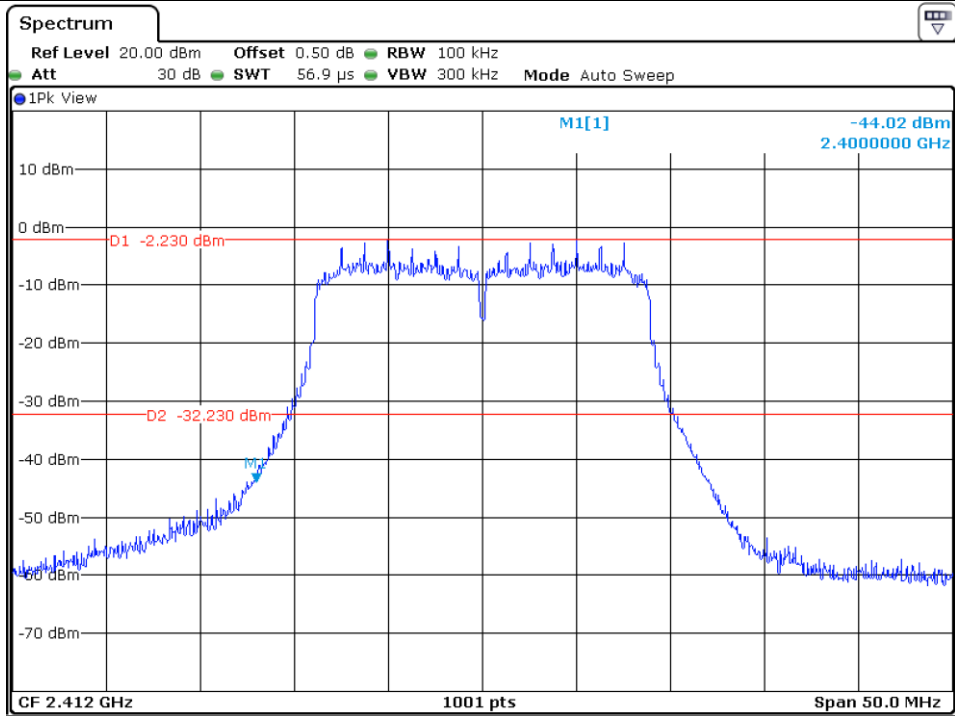


Low Channel

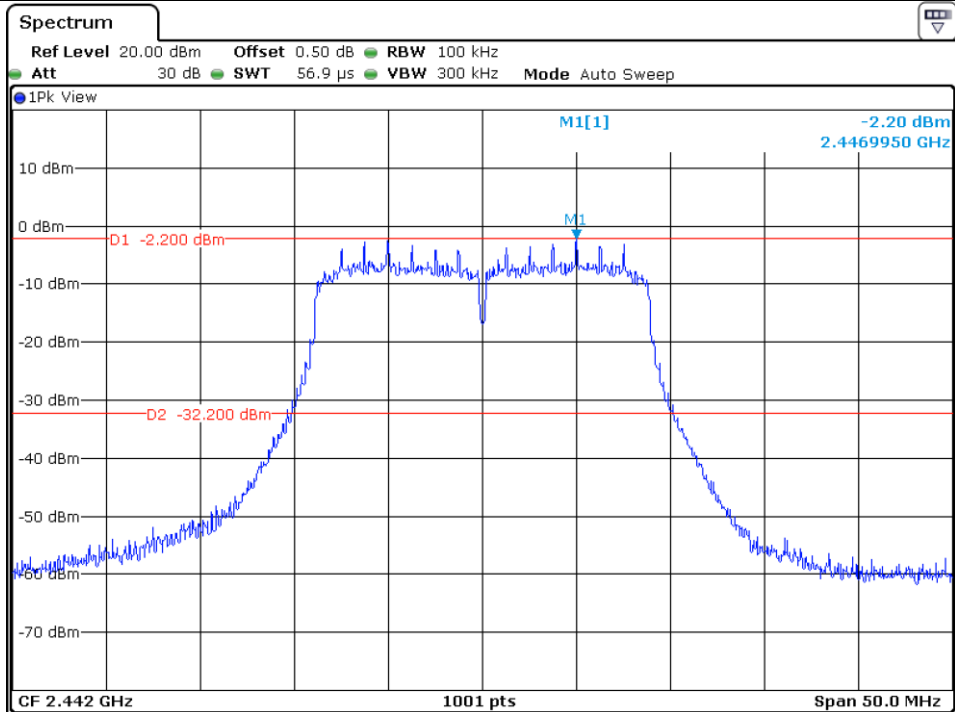


Middle Channel

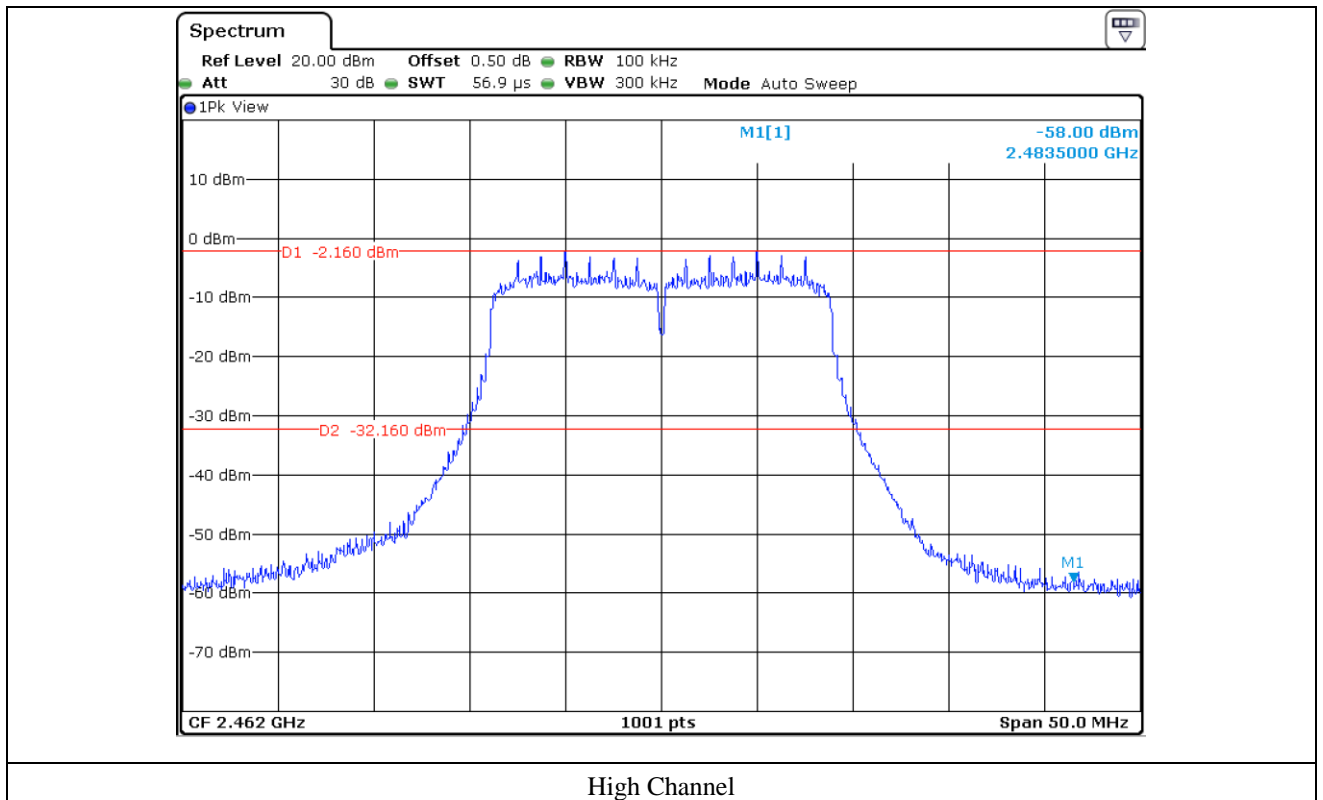


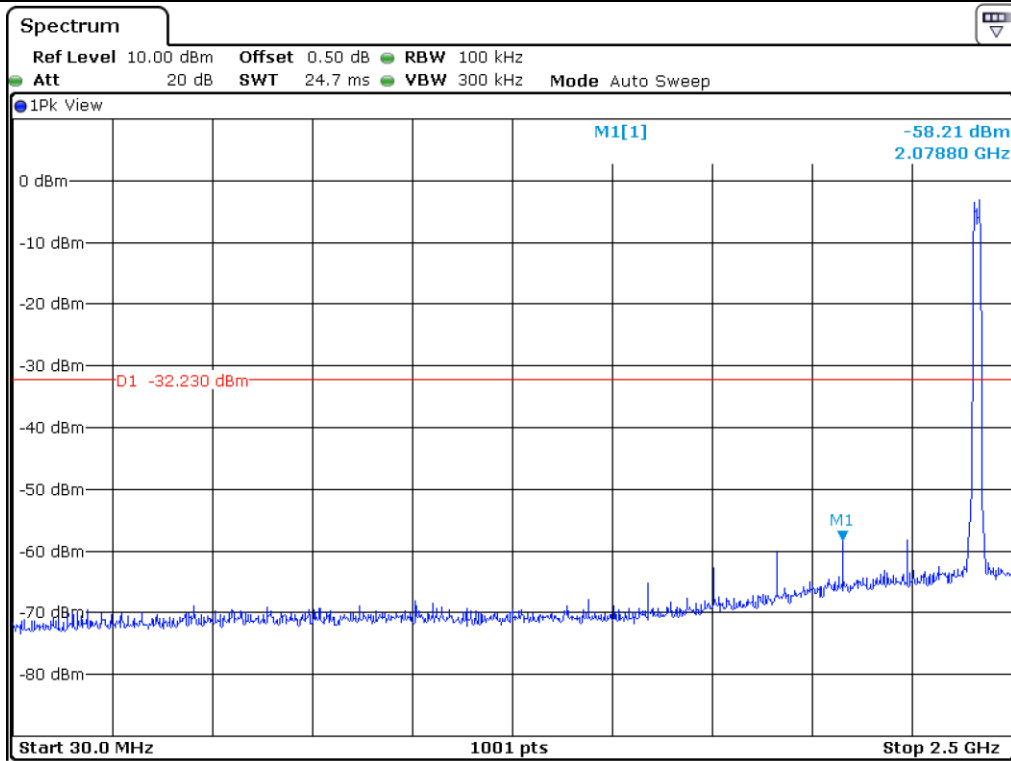


Low Channel

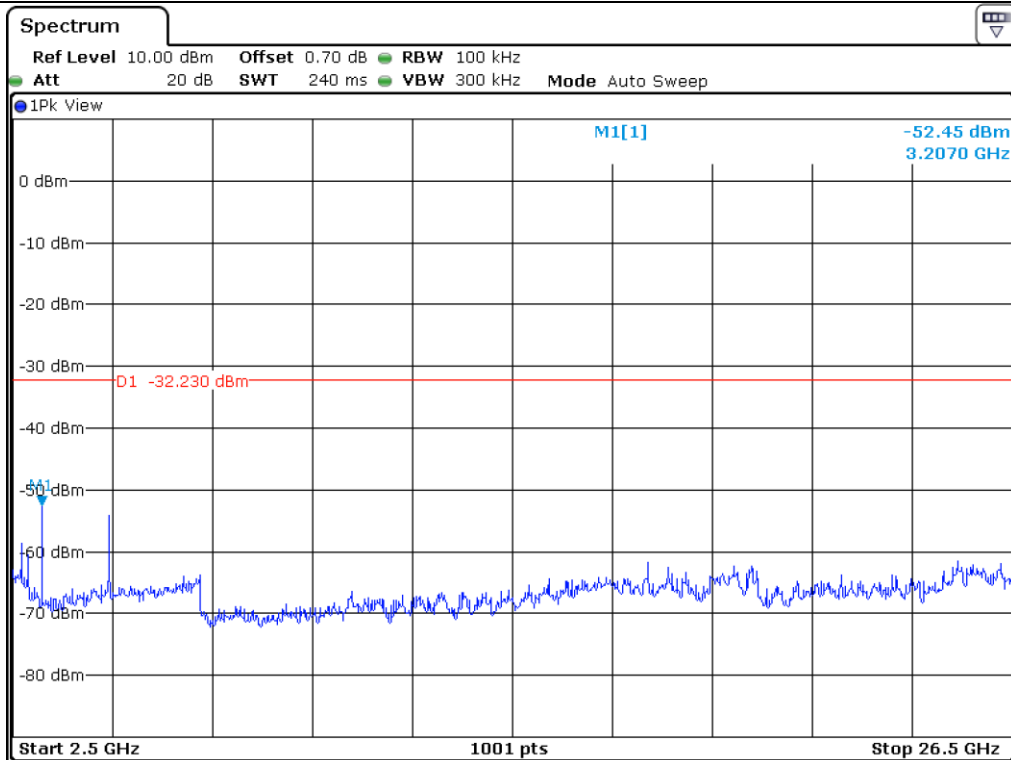


Low Channel

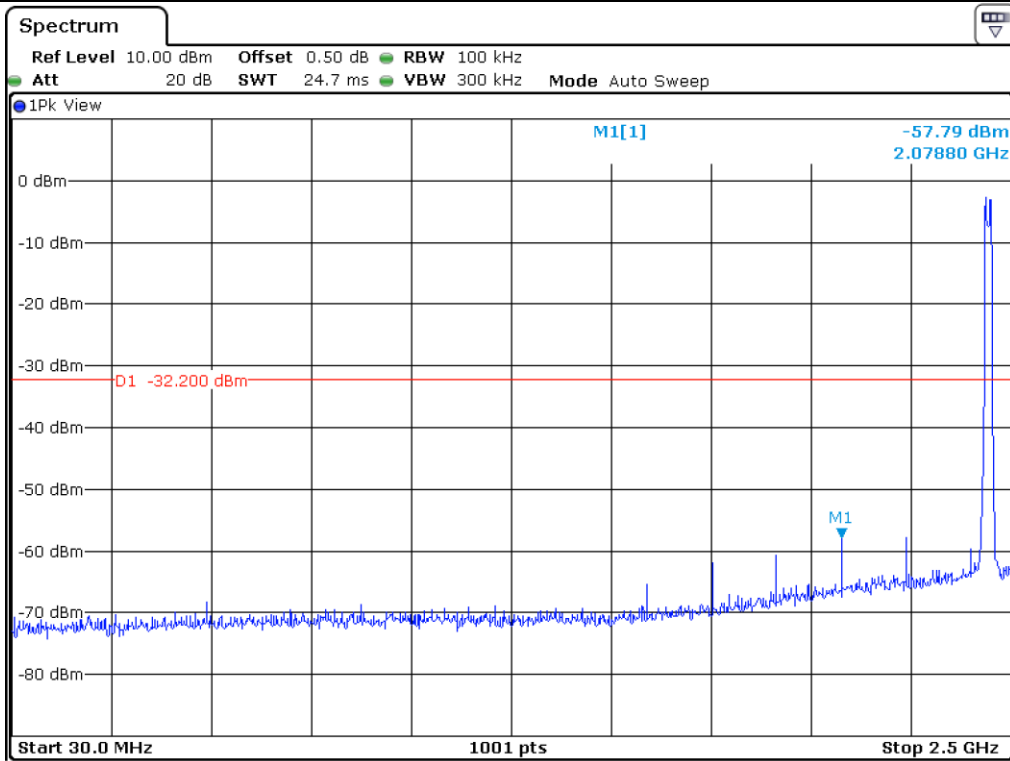


Middle Channel

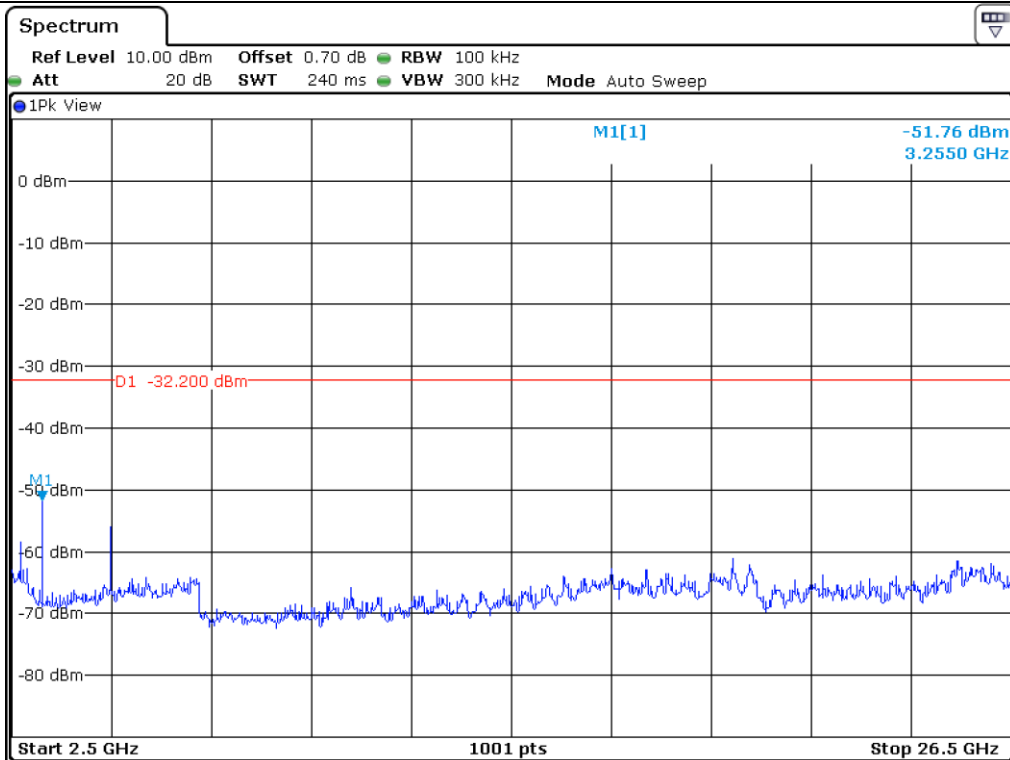

Middle Channel

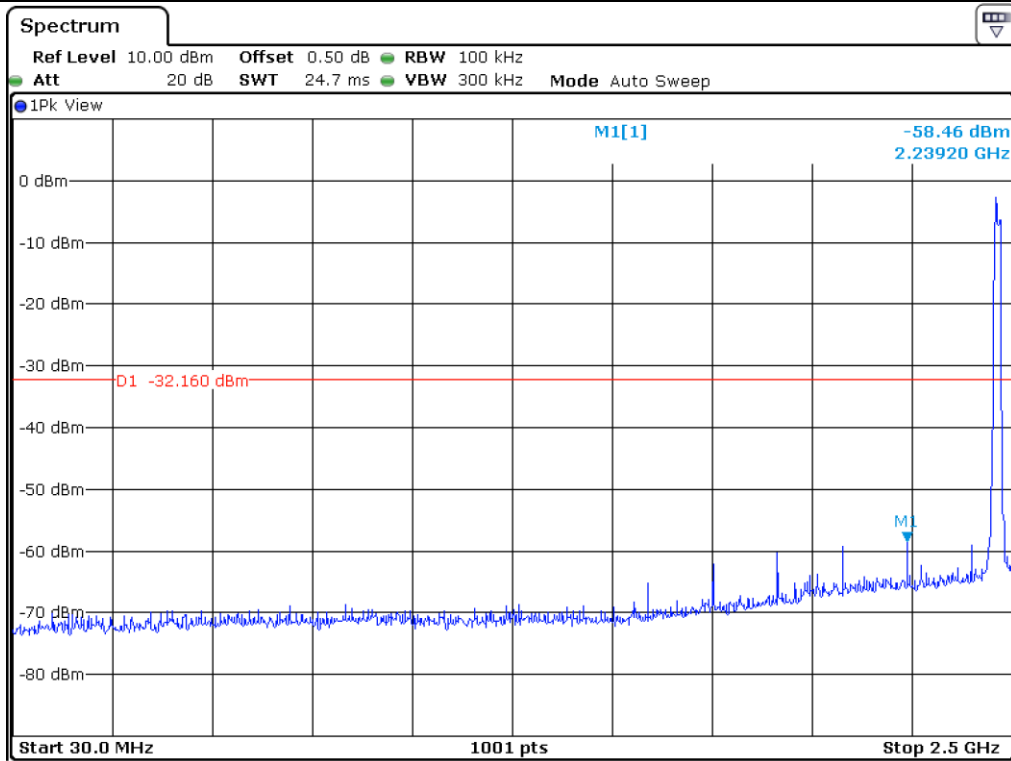


High Channel

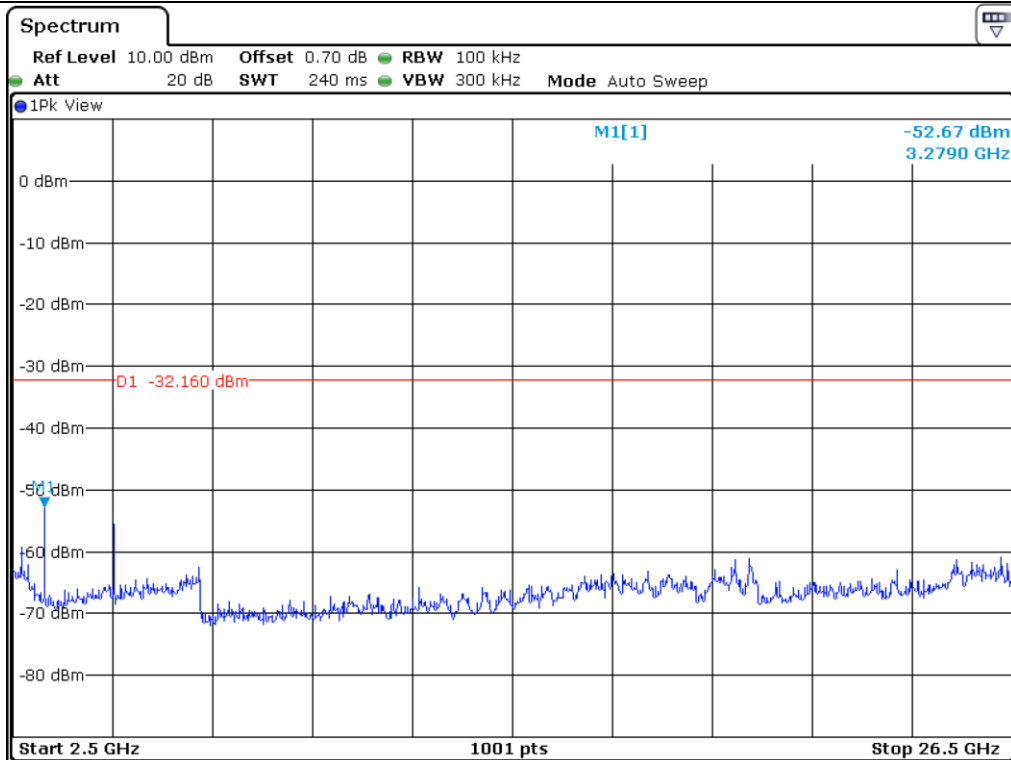


High Channel


9.5.3.2 Test data for Antenna 1

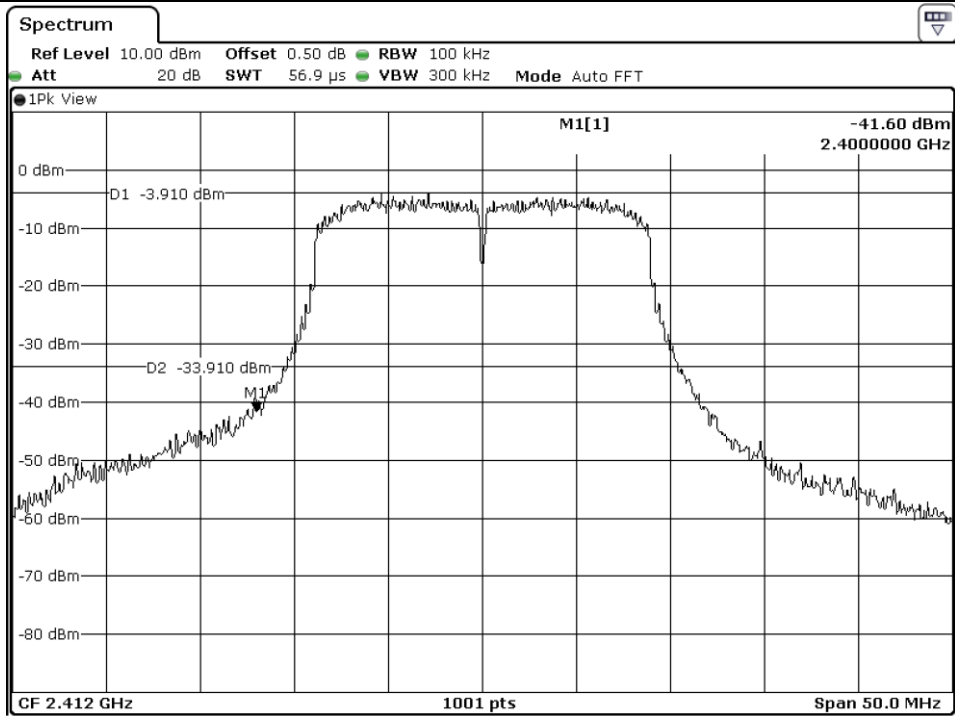


Low Channel

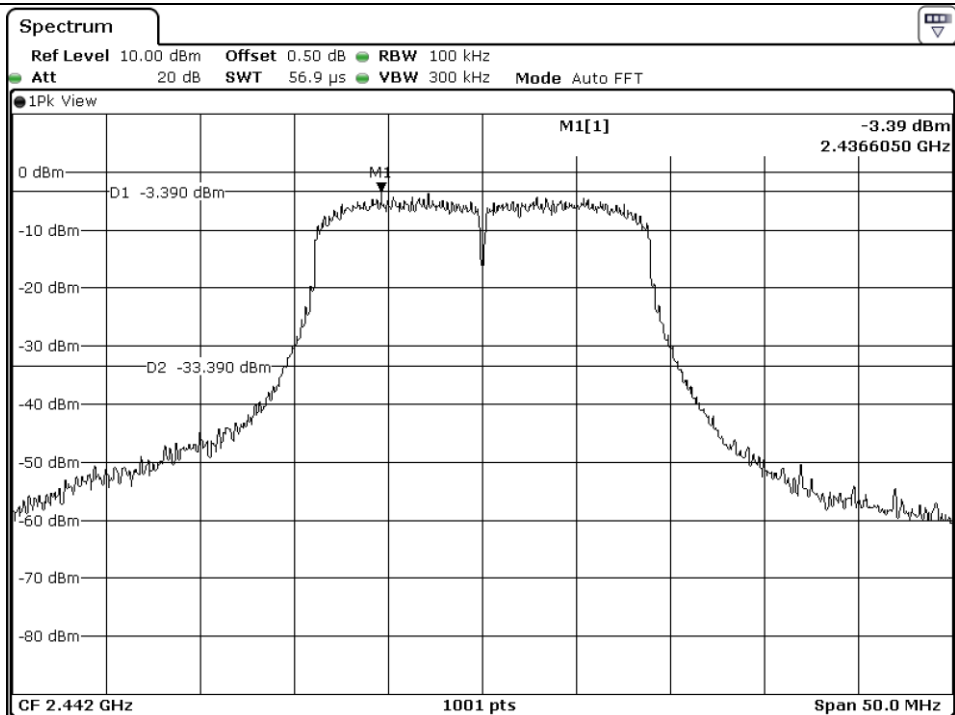


Middle Channel

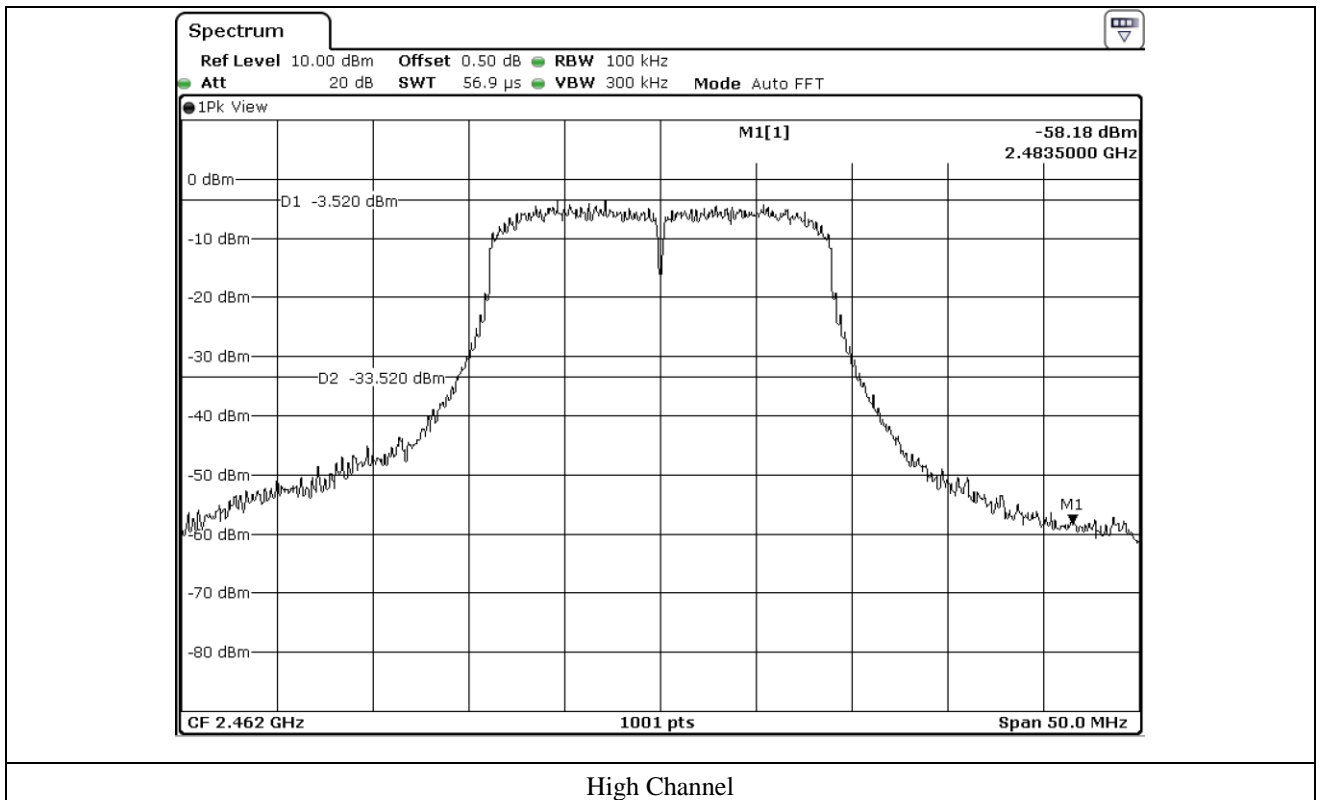


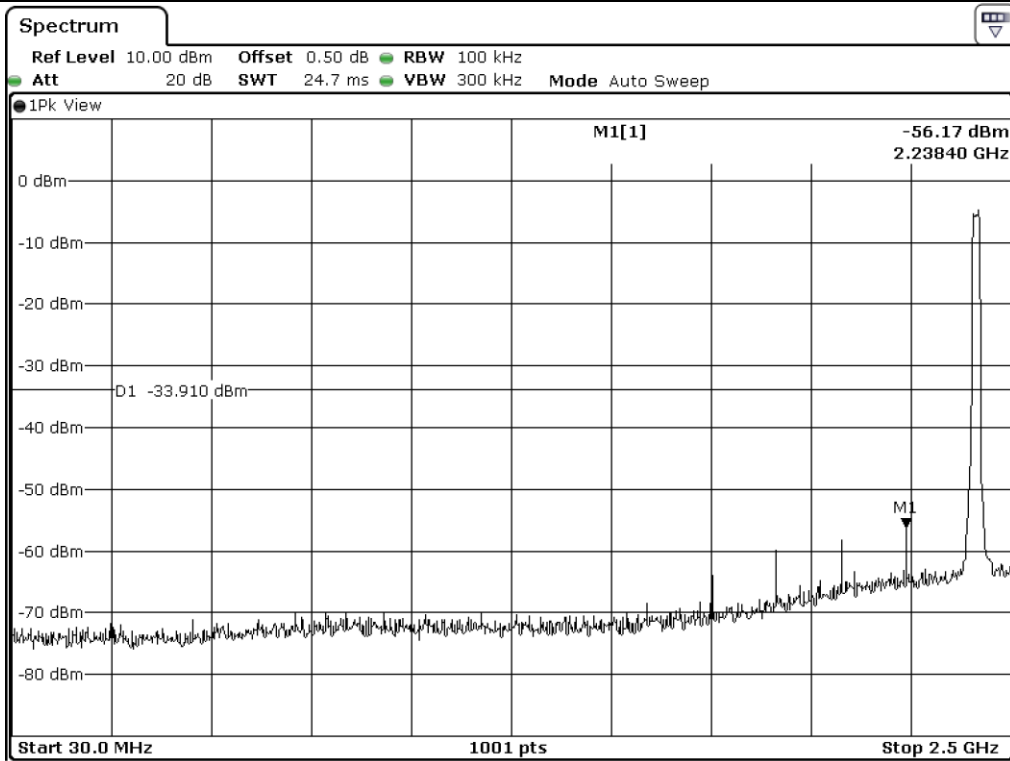


Low Channel

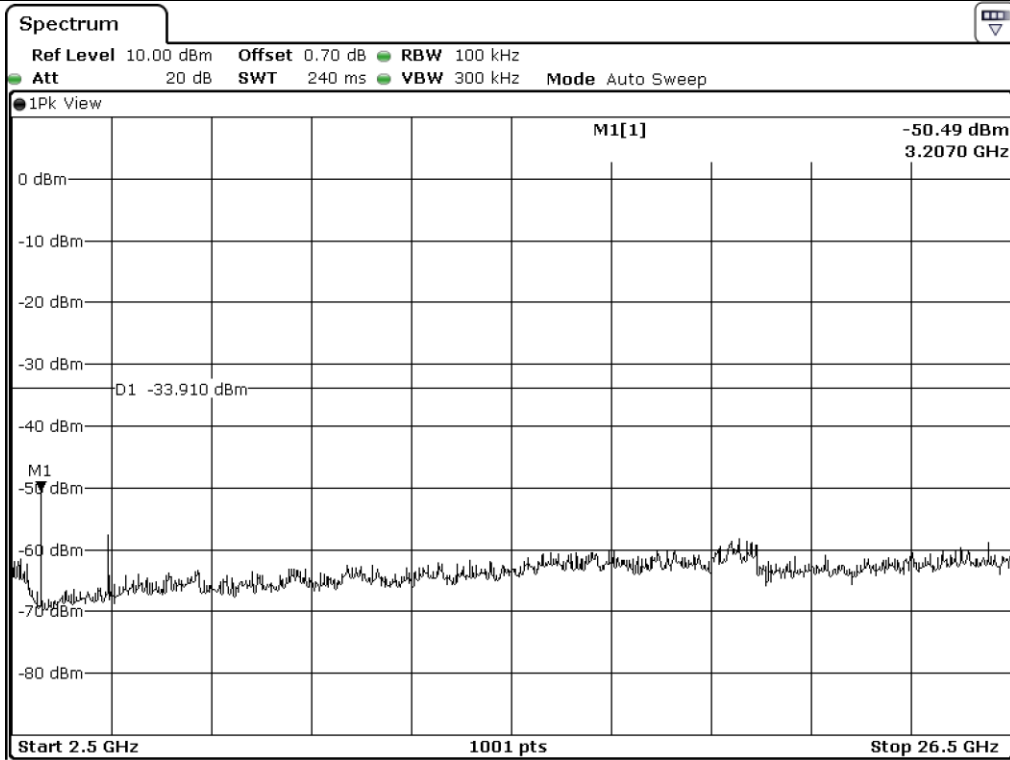


Low Channel

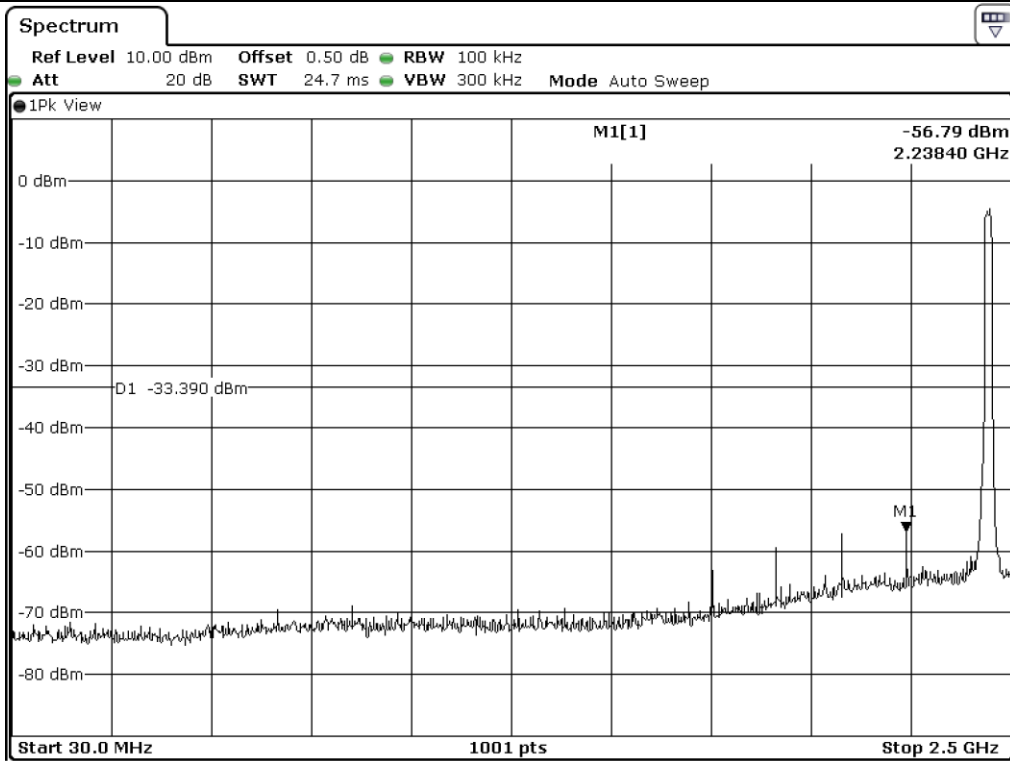


Middle Channel

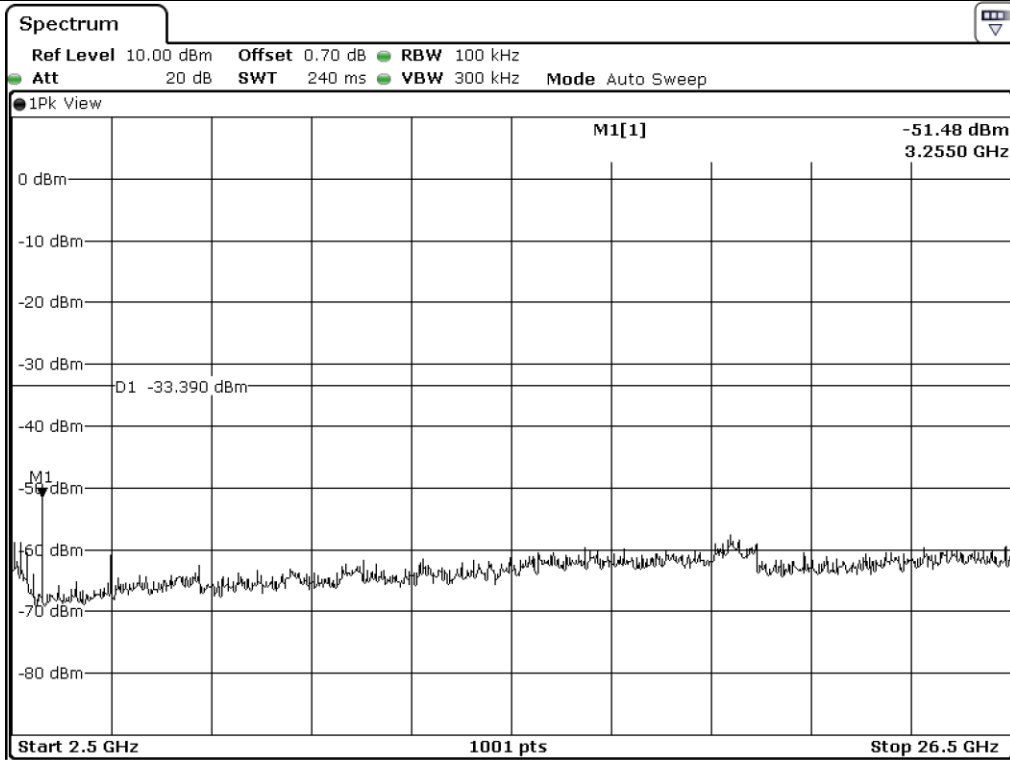

Middle Channel

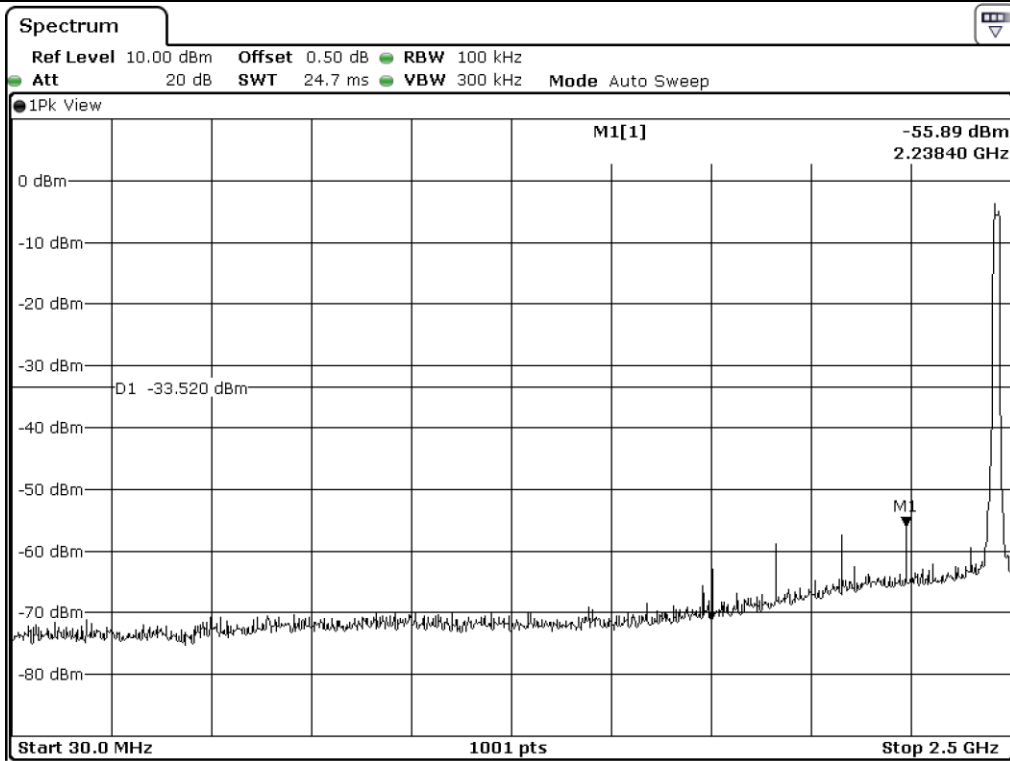


High Channel

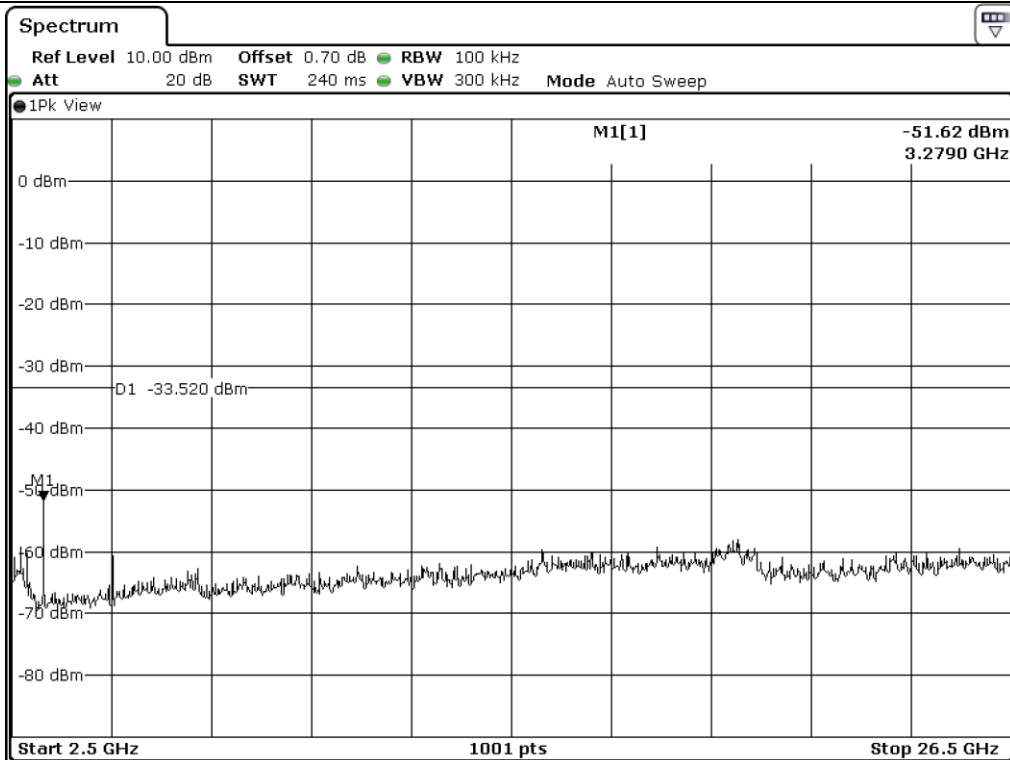


High Channel

9.5.4 Test data for 802.11n_HT40 WLAN Mode


9.5.4.1 Test data for Antenna 0

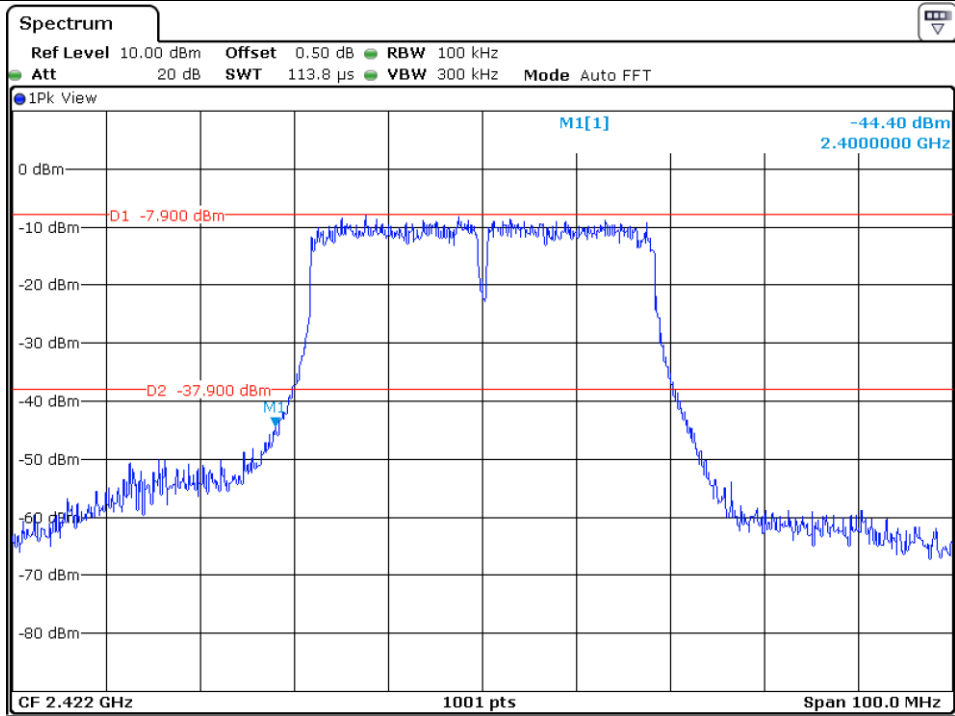


Low Channel

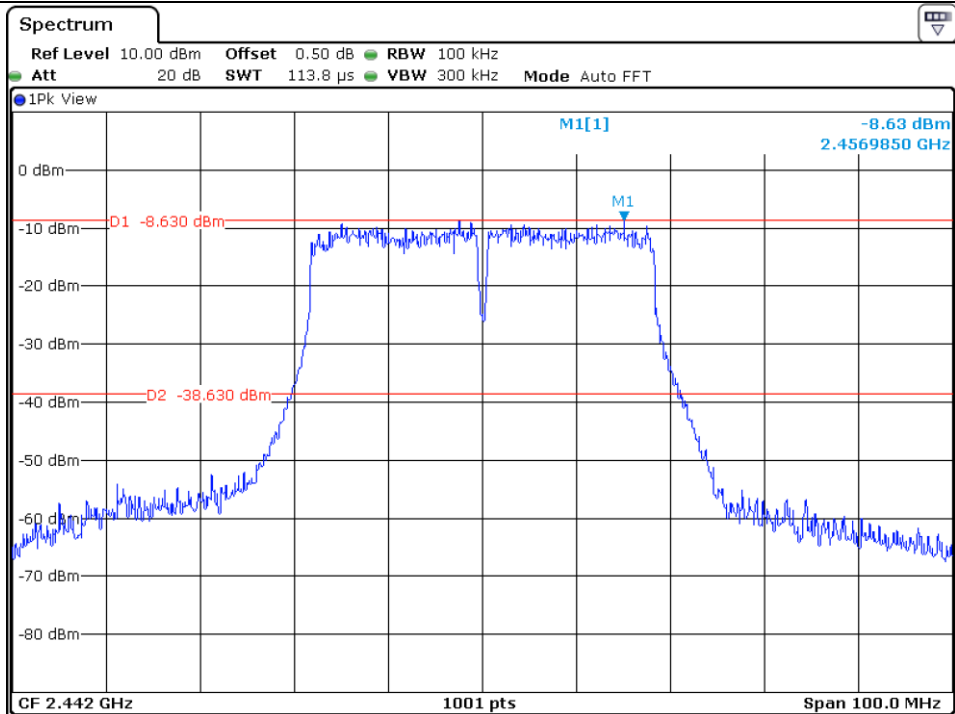


Middle Channel

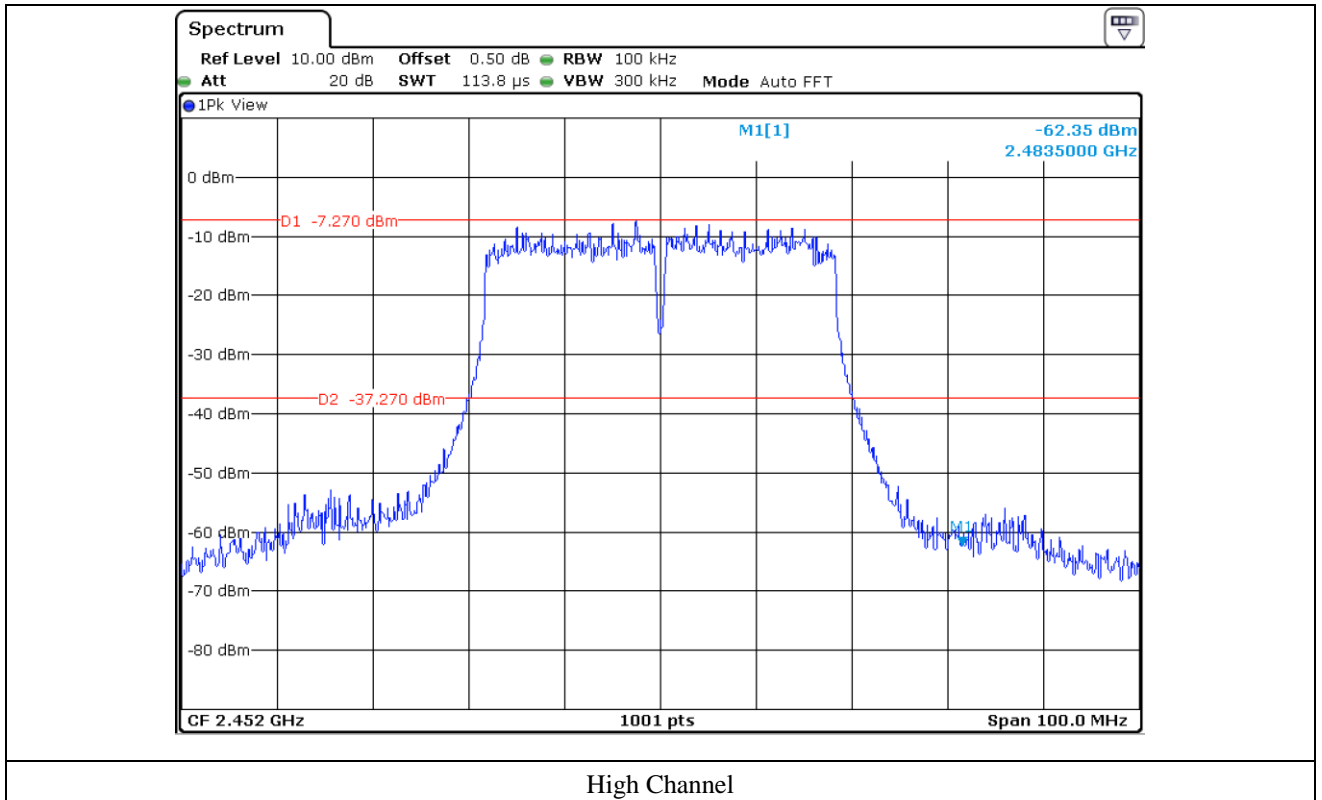


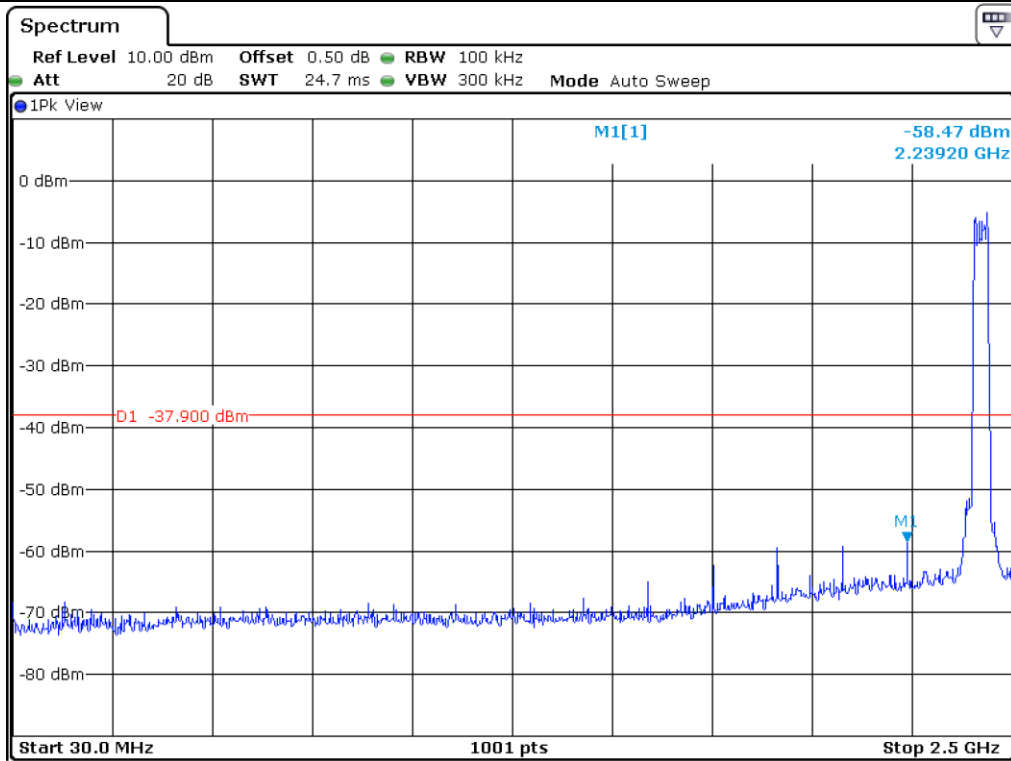


Low Channel

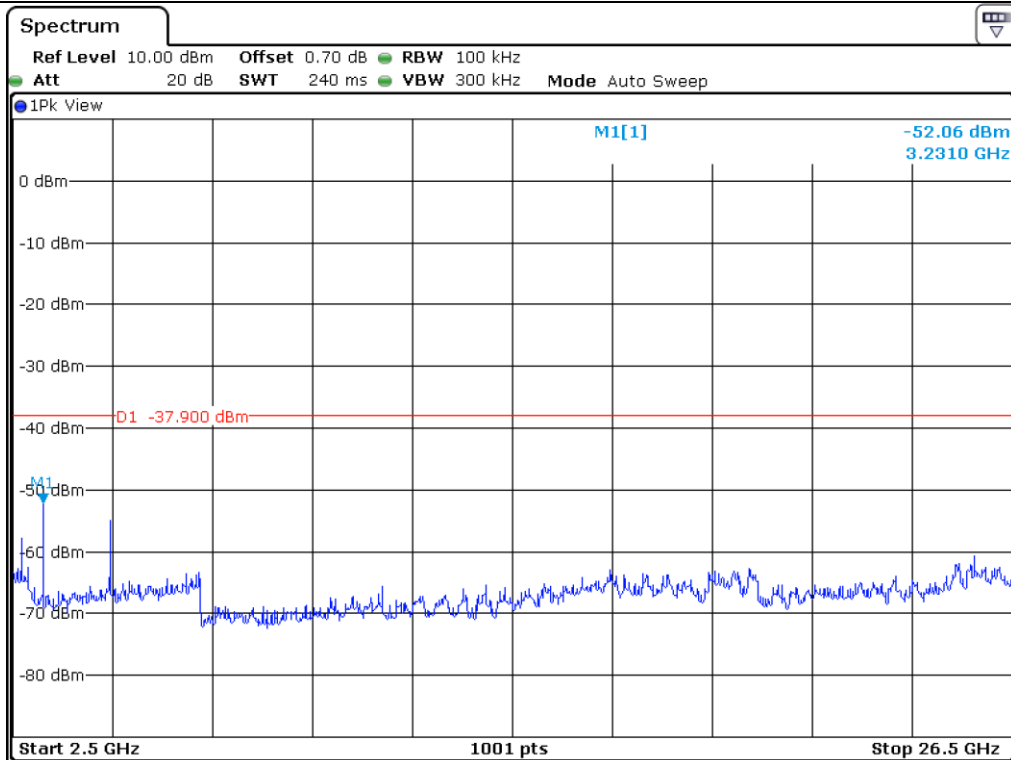


Low Channel

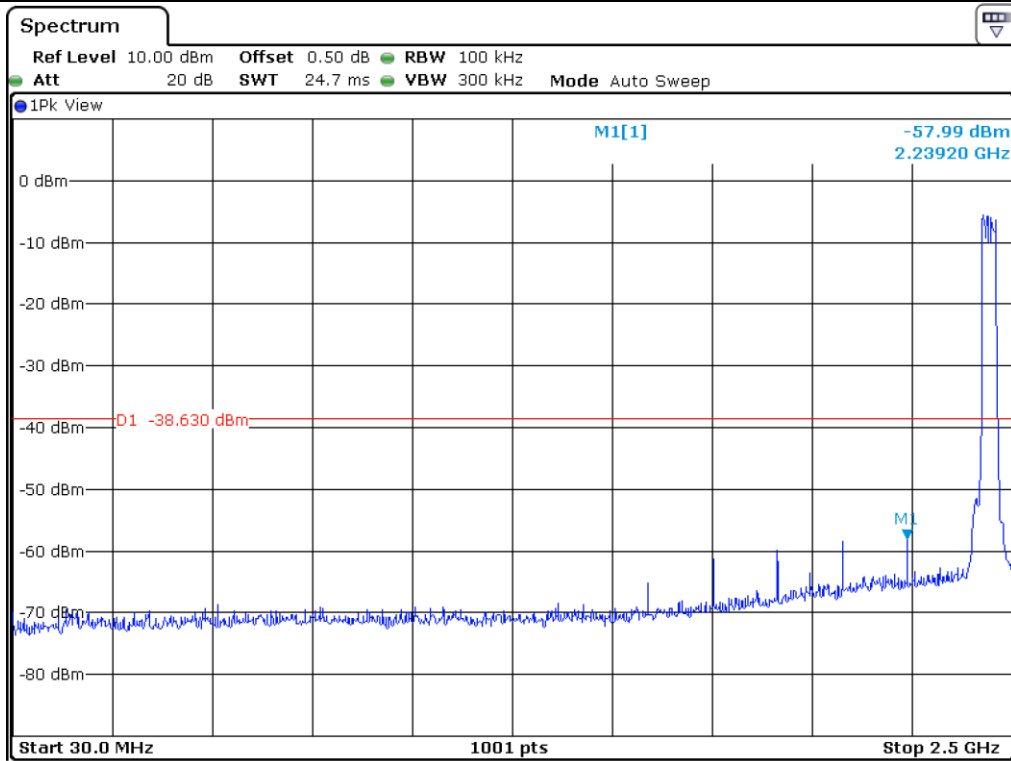


Middle Channel

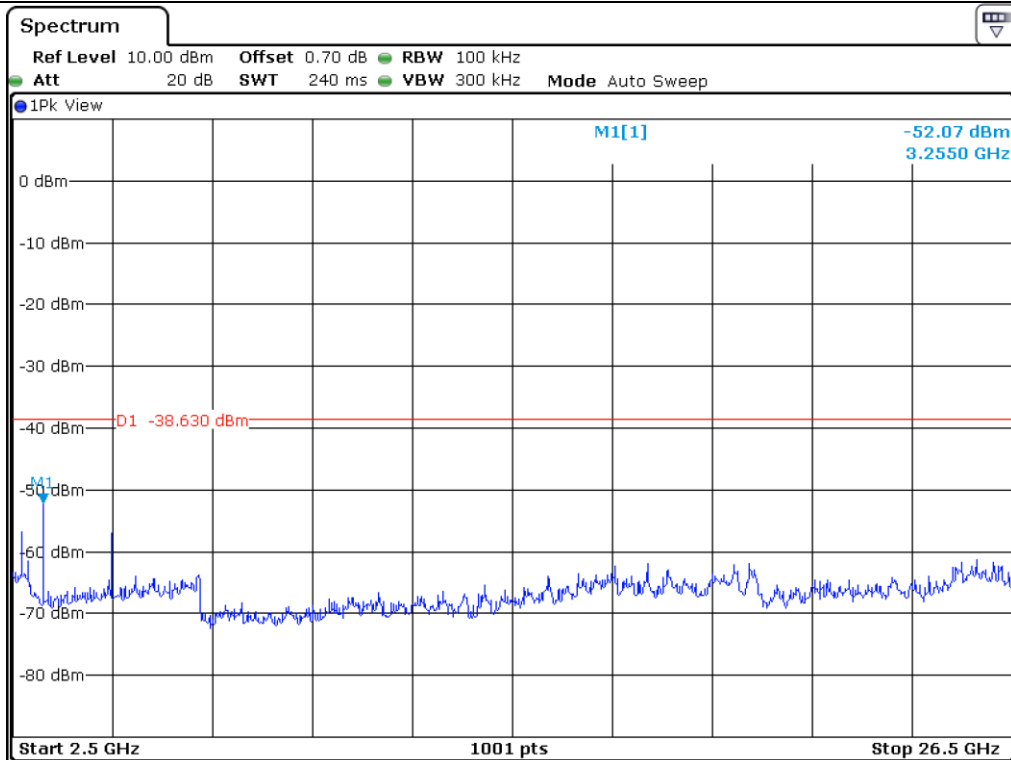

Middle Channel

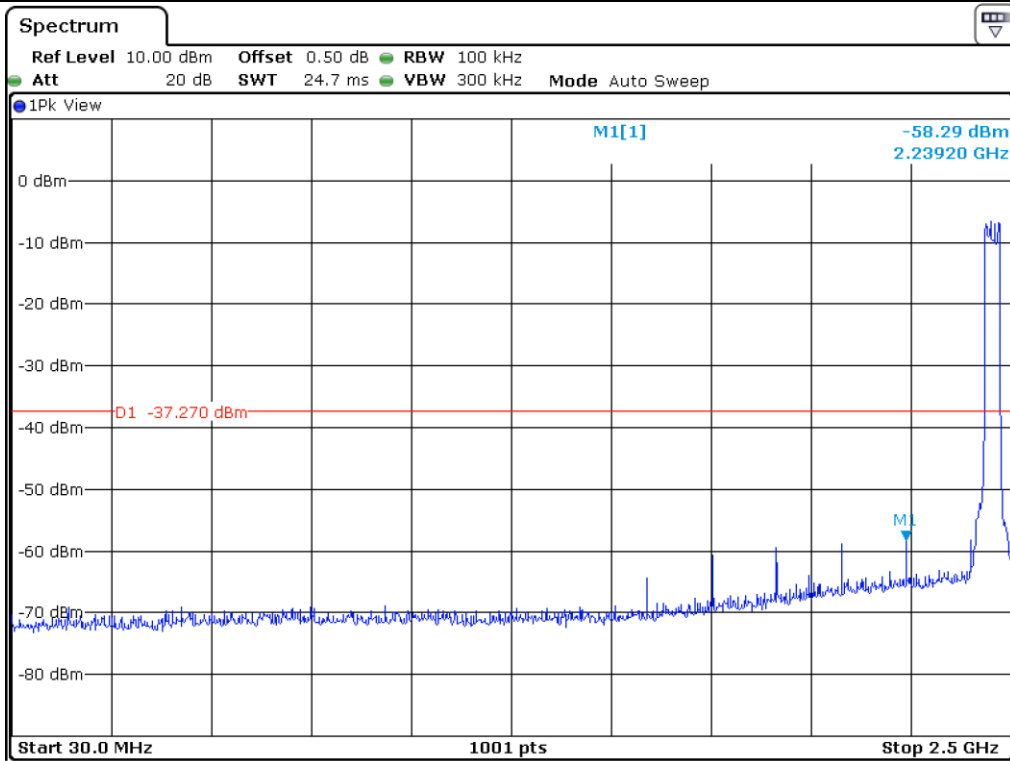

High Channel

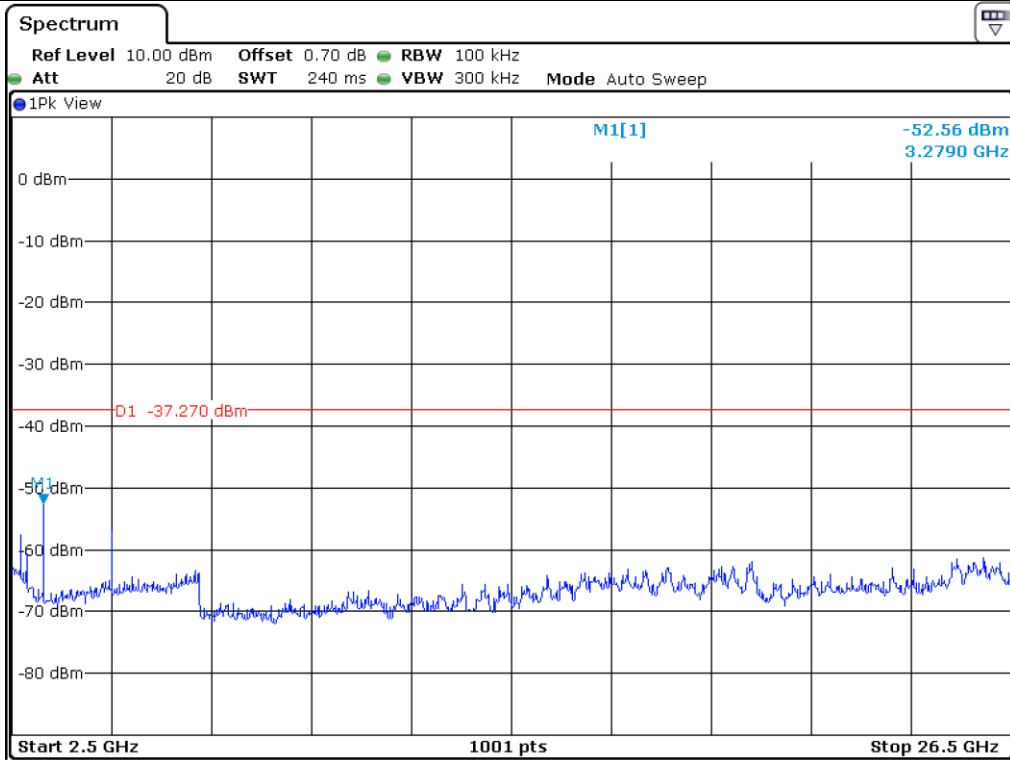

High Channel