



Certificate #4312.01

# TEST REPORT

**Product Name:** IP Phone  
**Trade Mark:** GRANDSTREAM  
**Model No.:** GRP2602W  
**HVIN:** GRP2602WV2  
**Report Number:** 2401158930RFC-2  
**Test Standards:** FCC 47 CFR Part 15 Subpart E  
 RSS-247 Issue 3  
 RSS-Gen Issue 5  
**FCC ID:** YZZGRP2602WV2  
**IC:** 11964A-GRP2602WV2  
**Test Result:** PASS  
**Date of Issue:** June 24, 2024

Prepared for:

**Grandstream Networks, Inc.**  
**126 Brookline Ave., 3rd Floor, Boston, MA 02215, USA**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and  
 technology park, Longhua district, Shenzhen, China**

**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Prepared by: David Chen  
 David Chen  
 Senior Project Engineer

Reviewed by: Henry Lu  
 Henry Lu  
 Team Leader

Approved by: Robben Chen  
 Robben Chen  
 Assistant Manager

Date: June 24, 2024

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

**Version**

Version No.	Date	Description
V1.0	June 24, 2024	Original



## CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 OTHER INFORMATION	7
1.5 DESCRIPTION OF SUPPORT UNITS	7
1.6 TEST LOCATION	8
1.7 TEST FACILITY	8
1.8 DEVIATION FROM STANDARDS	8
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	8
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
1.11 MEASUREMENT UNCERTAINTY	9
<b>2. TEST SUMMARY</b>	<b>10</b>
<b>3. EQUIPMENT LIST</b>	<b>11</b>
<b>4. TEST CONFIGURATION</b>	<b>12</b>
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	12
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	12
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	12
4.2 TEST CHANNELS	13
4.3 EUT TEST STATUS	13
4.4 PRE-SCAN	14
4.5 TEST SETUP	15
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	15
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	16
4.5.3 FOR CONDUCTED RF TEST SETUP	17
4.6 SYSTEM TEST CONFIGURATION	18
4.7 DUTY CYCLE	19
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>	<b>23</b>
5.1 REFERENCE DOCUMENTS FOR TESTING	23
5.2 ANTENNA REQUIREMENT	23
5.3 26 DB BANDWIDTH & OCCUPIED BANDWIDTH	24
5.4 6 DB BANDWIDTH & OCCUPIED BANDWIDTH	25
5.5 MAXIMUM CONDUCTED OUTPUT POWER OR E.I.R.P	26
5.6 PEAK POWER SPECTRAL DENSITY	33
5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT	36
5.8 DYNAMIC FREQUENCY SELECTION	95
5.9 AC POWER LINE CONDUCTED EMISSION	105
<b>APPENDIX A RF TEST DATA</b>	<b>108</b>
A.1 99% BANDWIDTH	108
A.2 26dB BANDWIDTH	128
A.3 PEAK POWER SPECTRAL DENSITY	142
A.4 6DB BANDWIDTH	163
<b>APPENDIX 1 PHOTOS OF TEST SETUP</b>	<b>170</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b>	<b>170</b>

# 1. GENERAL INFORMATION

## 1.1 CLIENT INFORMATION

<b>Applicant:</b>	Grandstream Networks, Inc.
<b>Address of Applicant:</b>	126 Brookline Ave., 3rd Floor, Boston, MA 02215, USA
<b>Manufacturer:</b>	Grandstream Networks, Inc.
<b>Address of Manufacturer:</b>	126 Brookline Ave., 3rd Floor, Boston, MA 02215, USA

## 1.2 EUT INFORMATION

### 1.2.1 General Description of EUT

<b>Product Name:</b>	IP Phone		
<b>Model No.:</b>	GRP2602W		
<b>HVIN:</b>	GRP2602WV2		
<b>Trade Mark:</b>	GRANDSTREAM		
<b>DUT Stage:</b>	Identical Prototype		
<b>EUT Supports Function:</b> (Provided by the customer)	2.4 GHz ISM Band:	IEEE 802.11b/g/n/ax	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac/ax
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac/ax
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac/ax
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac/ax
<b>Sample Received Date:</b>	January 15, 2024		
<b>Sample Tested Date:</b>	February 28, 2024 to April 19, 2024		

**Remark:** The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.

**1.2.2 Description of Accessories**

<b>Adapter (1)</b>	
<b>Model No.:</b>	GQ06-050060-ZU
<b>Input:</b>	100-240V~50/60Hz 0.3 A Max
<b>Output:</b>	5.0V==0.6 A
<b>DC Cable</b>	1.8 Meter, Unshielded without ferrite

<b>Adapter (2)</b>	
<b>Model No.:</b>	DCT06W050060US-D0
<b>Input:</b>	100-240V~50/60Hz 0.2 A Max
<b>Output:</b>	5.0V==0.6A 3.0W
<b>DC Cable</b>	1.8 Meter, Unshielded without ferrite

<b>Adapter (3)</b>	
<b>Model No.:</b>	F06US0500060A
<b>Input:</b>	100-240V~50/60Hz 0.2 A Max
<b>Output:</b>	5.0V==0.6A
<b>DC Cable</b>	1.8 Meter, Unshielded without ferrite

<b>Cable(1)</b>	
<b>Description:</b>	Ethernet Cable
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	1.5 Meter

<b>Cable(2)</b>	
<b>Description:</b>	Phone Cord
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	2.5 Meter

<b>Others</b>	
1x Handset, 1x Phone Stand	

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Frequency Bands:</b>	5150 MHz to 5250 MHz (U-NII-1)				
	5250 MHz to 5350 MHz (U-NII-2A)				
	5470 MHz to 5725 MHz (U-NII-2C)				
	5725 MHz to 5850 MHz (U-NII-3)				
<b>Frequency Ranges:</b>	5180 MHz to 5240 MHz				
	5260 MHz to 5320 MHz				
	5500 MHz to 5720 MHz				
	5745 MHz to 5825 MHz				
<b>Support Standards:</b>	IEEE 802.11a/n/ac/ax				
<b>TPC Function:</b>	Not Support				
<b>DFS Operational mode:</b>	Slave without radar Interference detection function				
<b>Type of Modulation:</b>	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK)				
	IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK)				
	IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)				
	IEEE 802.11ax:OFDM/ OFDMA <sup>Note 1</sup> (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)				
<b>Channel Spacing:</b>	IEEE 802.11a/n-HT20/ac-VHT20/ax-HE20: 20 MHz				
	IEEE 802.11n-HT40/ac-VHT40/ax-HE40: 40 MHz				
<b>Data Rate:</b>	IEEE 802.11a: Up to 54 Mbps				
	IEEE 802.11n-HT20: Up to MCS7				
	IEEE 802.11n-HT40: Up to MCS7				
	IEEE 802.11ac-VHT20: Up to MCS8				
	IEEE 802.11ac-VHT40: Up to MCS9				
	IEEE 802.11ax-HE20/HE40: Up to MCS11				
<b>Number of Channels:</b>	5150 MHz to 5250 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20/ax-HE20 2 for IEEE 802.11n-HT40/ac-VHT40/ax-HE40				
	5250 MHz to 5350 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20/ax-HE20 2 for IEEE 802.11n-HT40/ac-VHT40/ax-HE40				
	5470 MHz to 5725 MHz: 12 for IEEE 802.11a/n-HT20/ac-VHT20/ax-HE20 6 for IEEE 802.11n-HT40/ac-VHT40/ax-HE40				
	5725 MHz to 5850 MHz: 5 for IEEE 802.11a/n-HT20/ac-VHT20/ax-HE20 2 for IEEE 802.11n-HT40/ac-VHT40/ax-HE40				
<b>Antenna Type:</b>	PCB Antenna				
<b>Antenna Gain:</b> (Provided by the customer)	5150 MHz to 5250 MHz: 4.5 dBi				
	5250 MHz to 5350 MHz: 4.5 dBi				
	5470 MHz to 5725 MHz: 4.5 dBi				
	5725 MHz to 5850 MHz: 4.5 dBi				
<b>Maximum conducted output power (dBm):</b>		<b>U-NII-1</b>	<b>U-NII-2A</b>	<b>U-NII-2C</b>	<b>U-NII-3</b>
	IEEE 802.11a:	14.83	14.78	15.67	15.35
	IEEE 802.11n-HT20:	14.82	14.82	15.14	15.40
	IEEE 802.11n-HT40:	14.48	14.61	15.55	15.47
	IEEE 802.11ac-VHT20	14.85	14.85	15.14	15.49
	IEEE 802.11ac-VHT40	14.39	14.55	15.38	15.33

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

	IEEE 802.11ax-HE20	14.79	14.83	15.17	15.48
	IEEE 802.11ax-HE40	14.39	14.54	15.40	15.32
<b>Maximum EIRP (dBm):</b>		<b>U-NII-1</b>	<b>U-NII-2A</b>	<b>U-NII-2C</b>	<b>U-NII-3</b>
	IEEE 802.11a:	19.33	19.28	20.17	19.85
	IEEE 802.11n-HT20:	19.32	19.32	19.64	19.90
	IEEE 802.11n-HT40:	18.98	19.11	20.05	19.97
	IEEE 802.11ac-VHT20	19.35	19.35	19.64	19.99
	IEEE 802.11ac-VHT40	18.89	19.05	19.88	19.83
	IEEE 802.11ax-HE20	19.29	19.33	19.67	19.98
	IEEE 802.11ax-HE40	18.89	19.04	19.90	19.82
	<b>Normal Test Voltage:</b>	5Vdc			
<b>Note 1:</b> For IEEE 802.11ax, the customer declaration the product supports only the SU mode.					

### 1.4 OTHER INFORMATION

Operation Frequency Each of Channel				
	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
IEEE 802.11a, IEEE 802.11n-HT20, IEEE 802.11ac-VHT20 IEEE 802.11ax-HE20	$f = 5000 + 5k, k = 32 + 4n$			$f = 5000 + 5k,$ $k = 145 + 4n$
	$n = 1, \dots, 4$	$n = 5, \dots, 8$	$n = 17, \dots, 27$	$n = 1, \dots, 5$
IEEE 802.11n-HT40, IEEE 802.11ac-VHT40 IEEE 802.11ax-HE40	$f = 5000 + 5k, k = 30 + 8n$			$f = 5000 + 5k,$ $k = 143 + 8n$
	$n = 1, 2$	$n = 1, \dots, 5$	$n = 9, \dots, 13$	$n = 1, 2$
Note: f is the operating frequency (MHz); k is the operating channel.				

### 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

#### 1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	FCC ID	Supplied by
Notebook	Lenovo	B40-80	MP12NEQ6	UnionTrust	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust	UnionTrust
Wireless Home Router	SAGEMCOM	FAST5280	253703944	VW3FAST5280	UnionTrust
Key-Press Attenuator	Huaxin	KT2.5-90/1S-2S	UTTTL-EN023	N/A	UnionTrust
4 Way Divider	WOKEN	0120A040560002D	UTTTL-EN028	N/A	UnionTrust

#### 2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust



---

## 1.6 TEST LOCATION

---

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

---

## 1.7 TEST FACILITY

---

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

### FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

---

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.



### 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	± 6.4 x 10 <sup>-8</sup>
12	Transmission Time	± 0.19 %

## 2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 FCC 47 CFR Part 15 Subpart E Section 15.407(a)(1) (2) RSS-Gen Issue 5, Section 6.8	N/A	PASS
26 dB emission bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5) RSS-247 Issue 3 Section 6.2.1.2	KDB 789033 D02 v02r01 Section C.1	PASS
6 dB bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (e) RSS-247 Issue 3 Section 6.2.4.1	KDB 789033 D02 v02r01 Section C.2	PASS
Occupied Bandwidth	RSS-Gen Issue 5, Section 6.7	RSS-Gen Issue 5, section 6.7	PASS
Maximum conducted output power	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3) RSS-247 Issue 3 Section 6.2.1.1/6.2.2.1/6.2.3.1/6.2.4.1	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	PASS
Peak Power Spectral Density	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3) RSS-247 Issue 3 Section 6.2.1.1/6.2.2.1/6.2.3.1/6.2.4.1	KDB 789033 D02 v02r01 Section F	PASS
Radiated Emissions and Band Edge Measurement	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6) FCC 47 CFR Part 15 Subpart C Section 15.209/205 RSS-247 Issue 3 Section 6.2.1.2/6.2.2.2/6.2.3.2/6.2.4.2	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	PASS
Dynamic Frequency Selection	FCC 47 CFR Part 15 Subpart E Section 15.407 (h) RSS-247 Issue 3 Section 6.3	KDB 905462 D03 Client Without DFS New Rules v01r02	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(6) FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013, Section 6.2.	PASS
<b>Disclaimer and Explanations:</b> The declared of product specification and data (e.g. antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

### For Dynamic Frequency Selection

Test Case	Result
Channel Availability Check Time	N/A <sup>Note 1</sup>
U-NII Detection Bandwidth	N/A <sup>Note 1</sup>
Channel Closing Transmission Time	PASS
Channel Move Time	PASS
DFS Detection Threshold	N/A <sup>Note 1</sup>
Non- Occupancy Period	N/A <sup>Note 1</sup>
<b>Note:</b> 1) The EUT is slave, NA In this whole report not applicable.	

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m SAC	ETS-LINDGREN	3m	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSV40-N	101653	14-Apr-2023	13-Apr-2024
					29-Mar-2024	28-Mar-2025
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Band Rejection Filter (5150MHz~5880MHz)	Micro-Tronics	BRM50716	G186	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna	ETS-LINDGREN	3117-PA	00201541	16-Apr-2023	15-Apr-2024
					01-Apr-2024	31-Mar-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-Lindgren	00118385	00201874	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna	ETS-LINDGREN	3116C-PA	00202652	30-Oct-2023	29-Oct-2024
					30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY51286807	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	27-Oct-2023	26-Oct-2024

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

#### 4. TEST CONFIGURATION

##### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

###### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	5	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

###### 4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
26 dB emission bandwidth	23.6	49.3	100.5	S202401152625-ZJA04/4	Allen Zhou
6 dB bandwidth					
Occupied Bandwidth					
Maximum conducted output power					
Peak Power Spectral Density					
Dynamic Frequency Selection	24.2	55.3	100.2	S202401152625-ZJA03/4	Yana Zeng
Radiated Emissions and Band Edge Measurement					
AC Power Line Conducted Emission					

### 4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists			
		Lowest(L)	Middle(M)	Highest(H)	Straddle band
IEEE 802.11a IEEE 802.11n-HT20 IEEE 802.11ac-VHT20 IEEE 802.11ax-HE20	5150 MHz to 5250 MHz	Channel 36	Channel 44	Channel 48	--
		5180 MHz	5220 MHz	5240 MHz	--
	5250 MHz to 5350 MHz	Channel 52	Channel 60	Channel 64	--
		5260 MHz	5300 MHz	5320 MHz	--
	5470 MHz to 5725 MHz	Channel 100	Channel 116	Channel 140	Channel 144
		5500 MHz	5580 MHz	5700 MHz	5720 MHz
	5725 MHz to 5850 MHz	Channel 149	Channel 157	Channel 165	--
		5745 MHz	5785 MHz	5825 MHz	--
IEEE 802.11n-HT40 IEEE 802.11ac-VHT40 IEEE 802.11ax-HE40	5150 MHz to 5250 MHz	Channel 38	--	Channel 46	--
		5190 MHz	--	5230 MHz	--
	5250 MHz to 5350 MHz	Channel 54	--	Channel 62	--
		5270 MHz	--	5310 MHz	--
	5470 MHz to 5725 MHz	Channel 102	Channel 110	Channel 134	Channel 142
		5510 MHz	5550 MHz	5670 MHz	5710 MHz
	5725 MHz to 5850 MHz	Channel 151	--	Channel 159	--
		5755 MHz	--	5795 MHz	--
	--	5775 MHz	--	--	

### 4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11a/n/ac/ax	1Tx/1Rx	1. Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

Power Setting				
	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
IEEE 802.11a	Default	Default	Default	Default
IEEE 802.11n-HT20	Default	Default	Default	Default
IEEE 802.11n-HT40	Default	Default	Default	Default
IEEE 802.11ac-VHT20	Default	Default	Default	Default
IEEE 802.11ac-VHT40	Default	Default	Default	Default
IEEE 802.11ax-HE20	Default	Default	Default	Default
IEEE 802.11ax-HE40	Default	Default	Default	Default

Test Software
Test software name: Putty commands



### 4.4 PRE-SCAN

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below


Mode	Worst-case data rates
IEEE 802.11a	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0
IEEE 802.11ac-VHT20	MCS0
IEEE 802.11ac-VHT40	MCS0
IEEE 802.11ax-HE20	MCS0
IEEE 802.11ax-HE40	MCS0

### 4.5 TEST SETUP


#### 4.5.1 For Radiated Emissions test setup

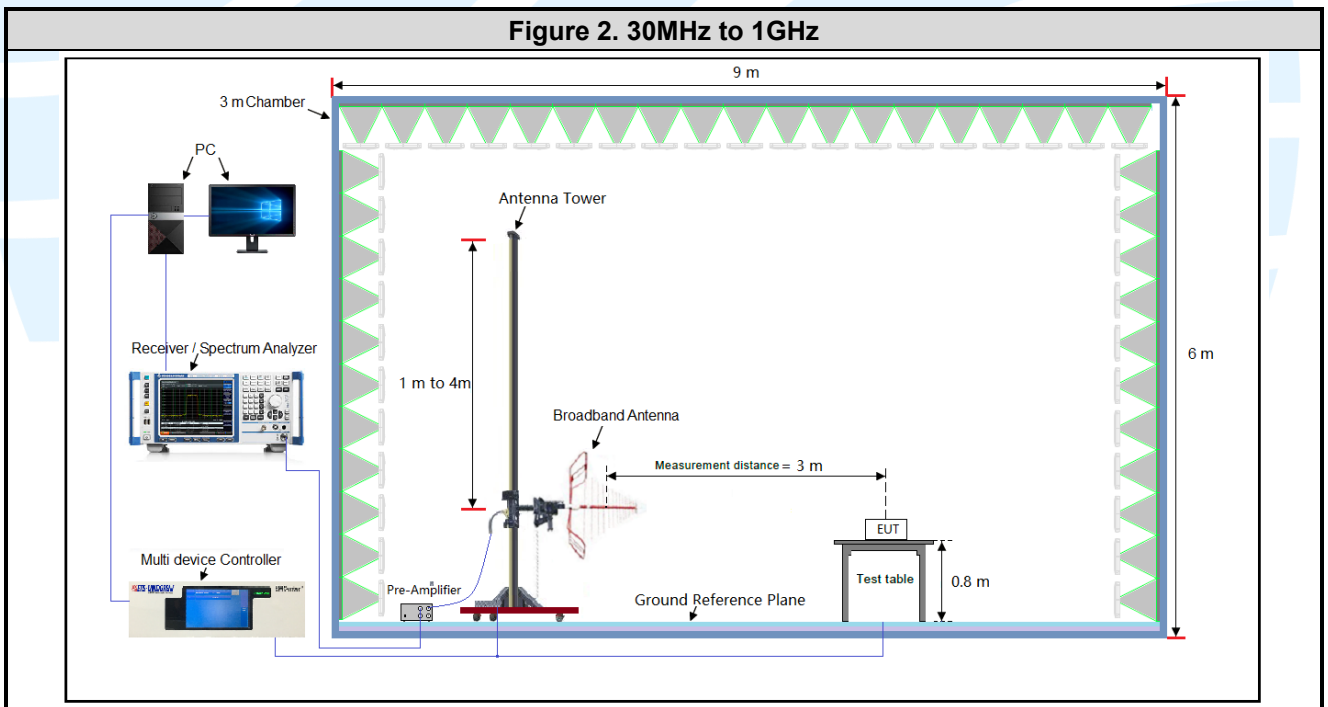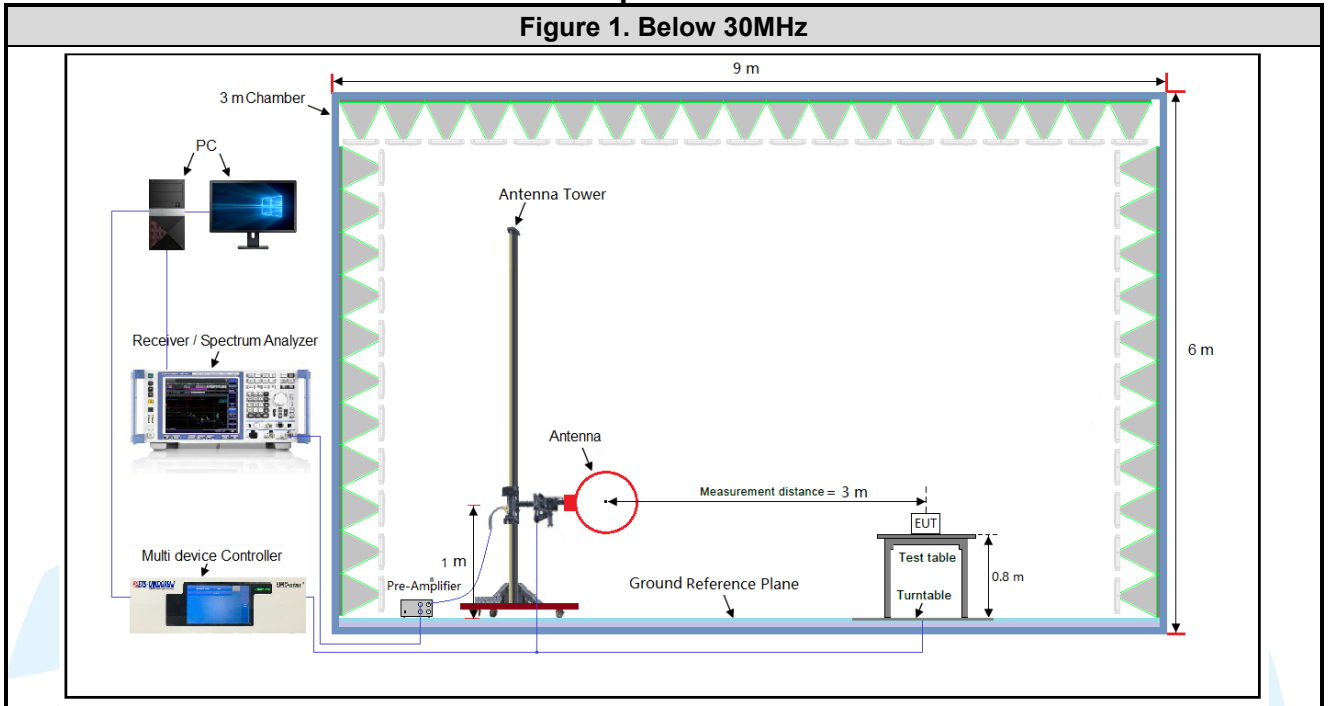




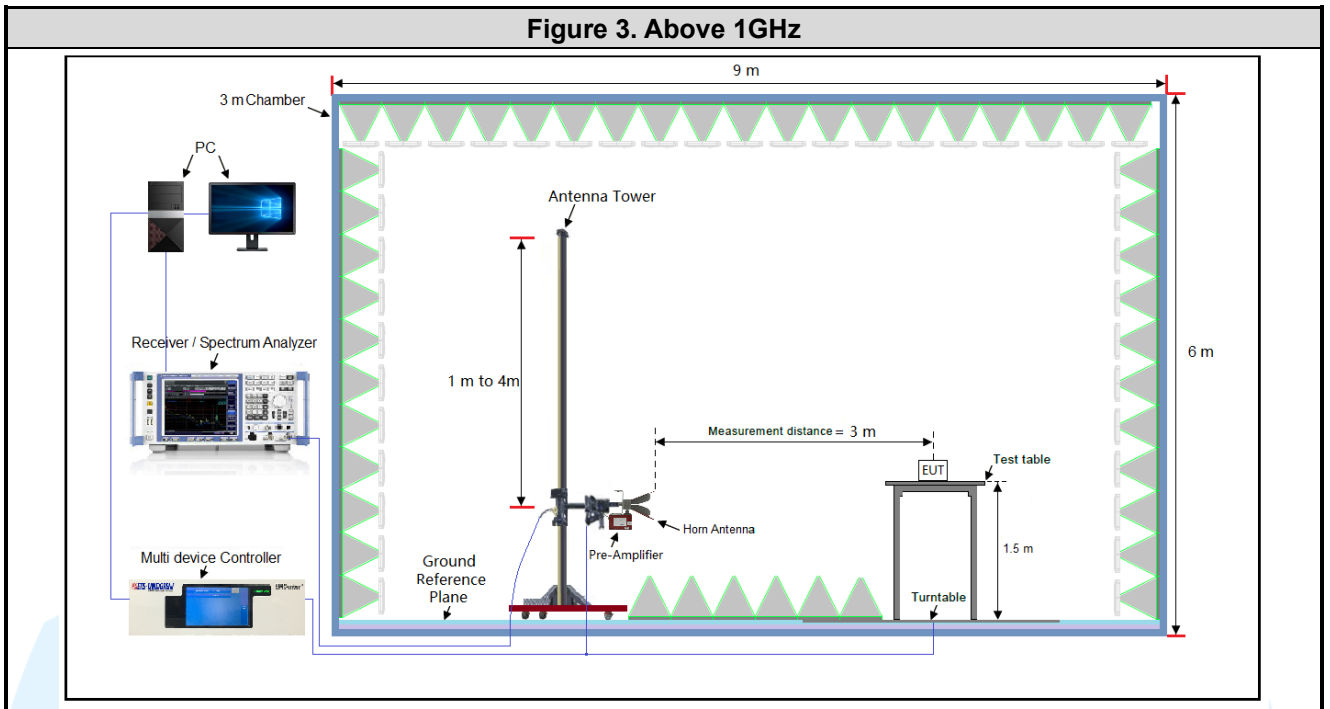

**4.5.2 For Conducted Emissions test setup**

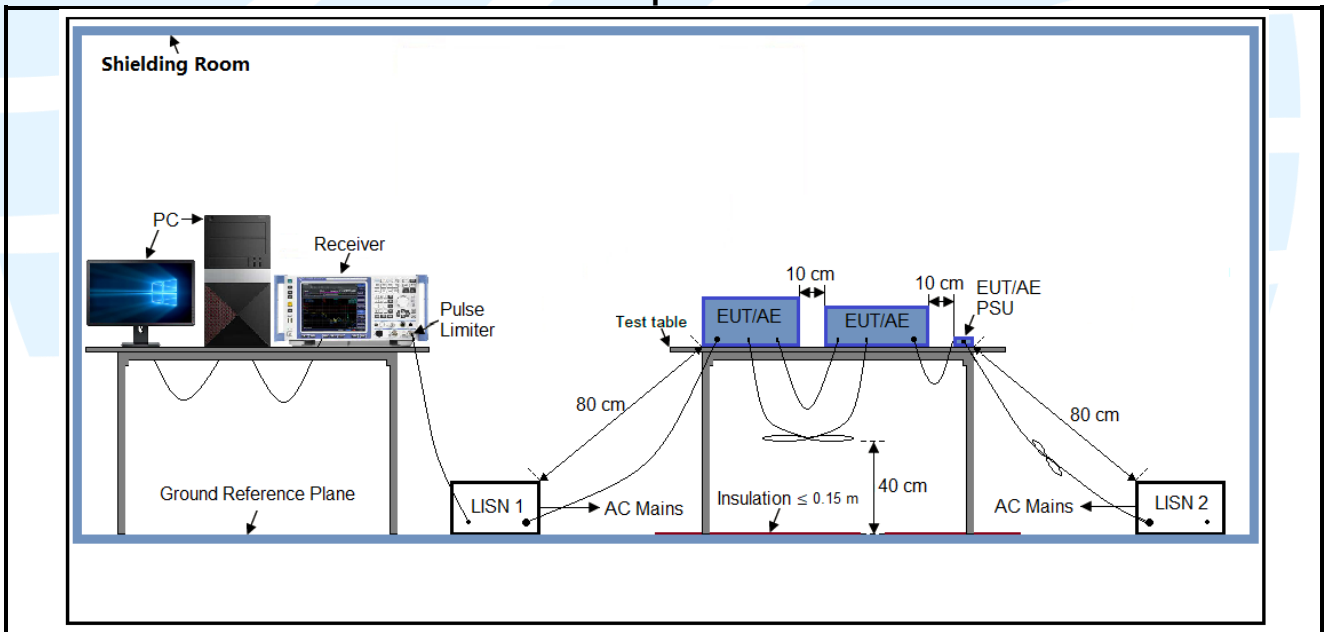

4.5.3 For Conducted RF test setup

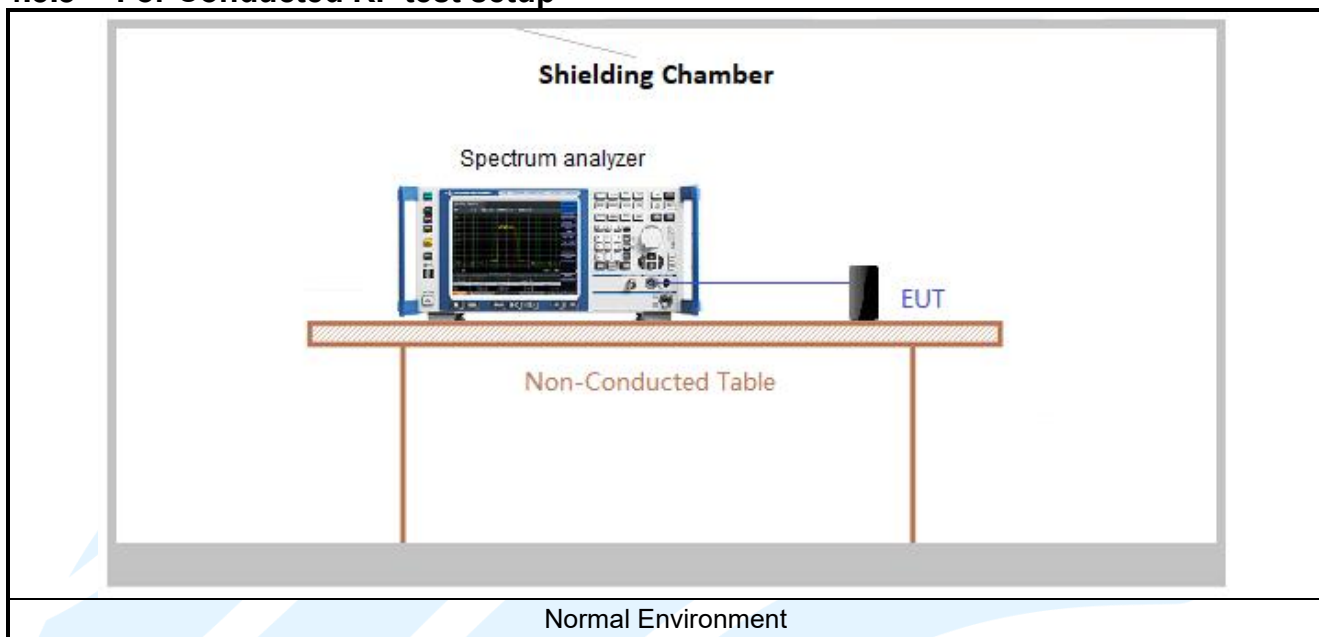

## 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

### 4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 12.2.


**Test Results**



Mode	Data Rates	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
IEEE 802.11a	6 Mbps	5.460	5.640	0.97	96.81	0.14	0.18
IEEE 802.11n-HT20	MCS 0	5.370	5.520	0.97	97.28	0.12	0.19
IEEE 802.11n-HT40	MCS 0	3.000	3.150	0.95	95.24	0.21	0.33
IEEE 802.11ac-VHT20	MCS 0	5.370	5.520	0.97	97.28	0.12	0.19
IEEE 802.11ac-VHT40	MCS 0	5.160	5.310	0.97	97.18	0.12	0.19
IEEE 802.11ax-HE20	MCS 0	4.650	4.830	0.96	96.27	0.16	0.22
IEEE 802.11ax-HE40	MCS 0	4.620	4.770	0.97	96.86	0.14	0.22

**Remark:**

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 \* log(1/ Duty cycle);
- 3) Average factor = 20 log<sub>10</sub> Duty Cycle.

The test plots as follows

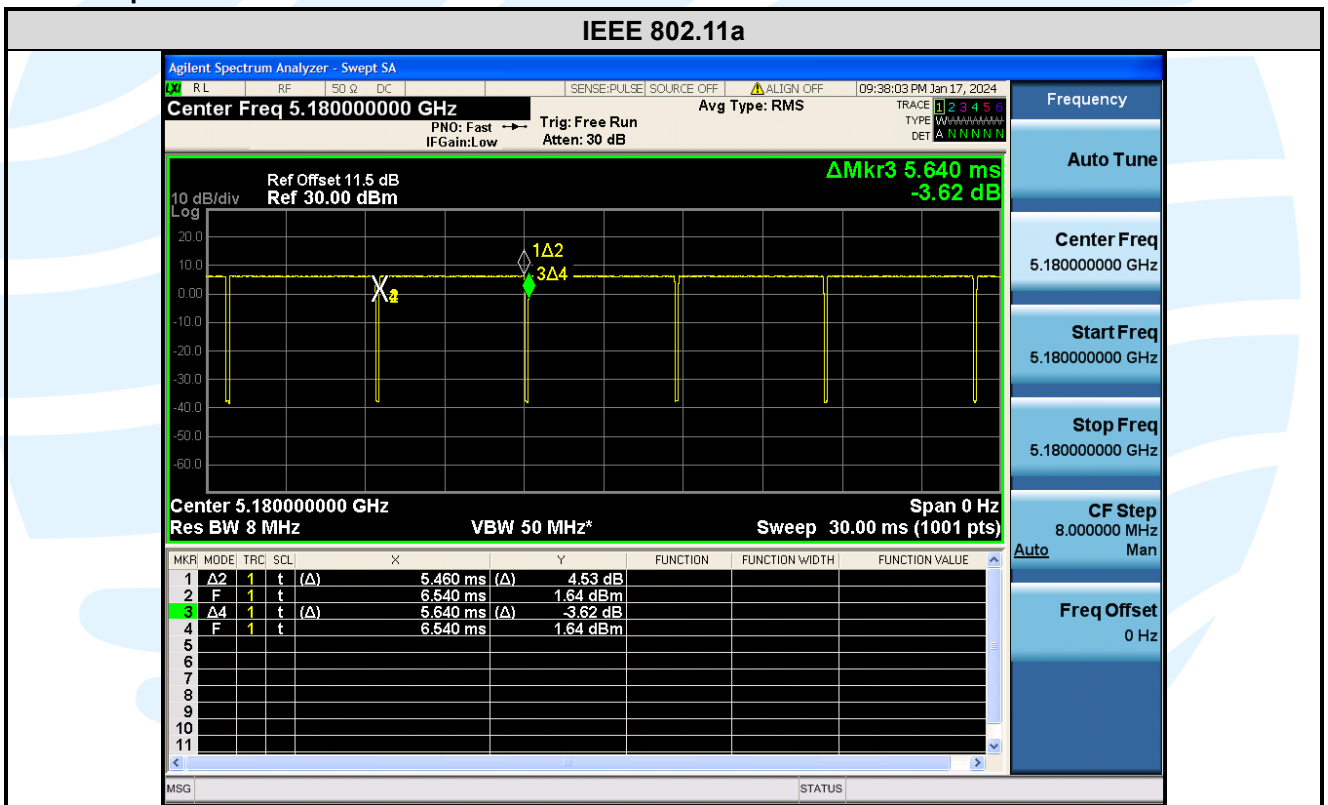

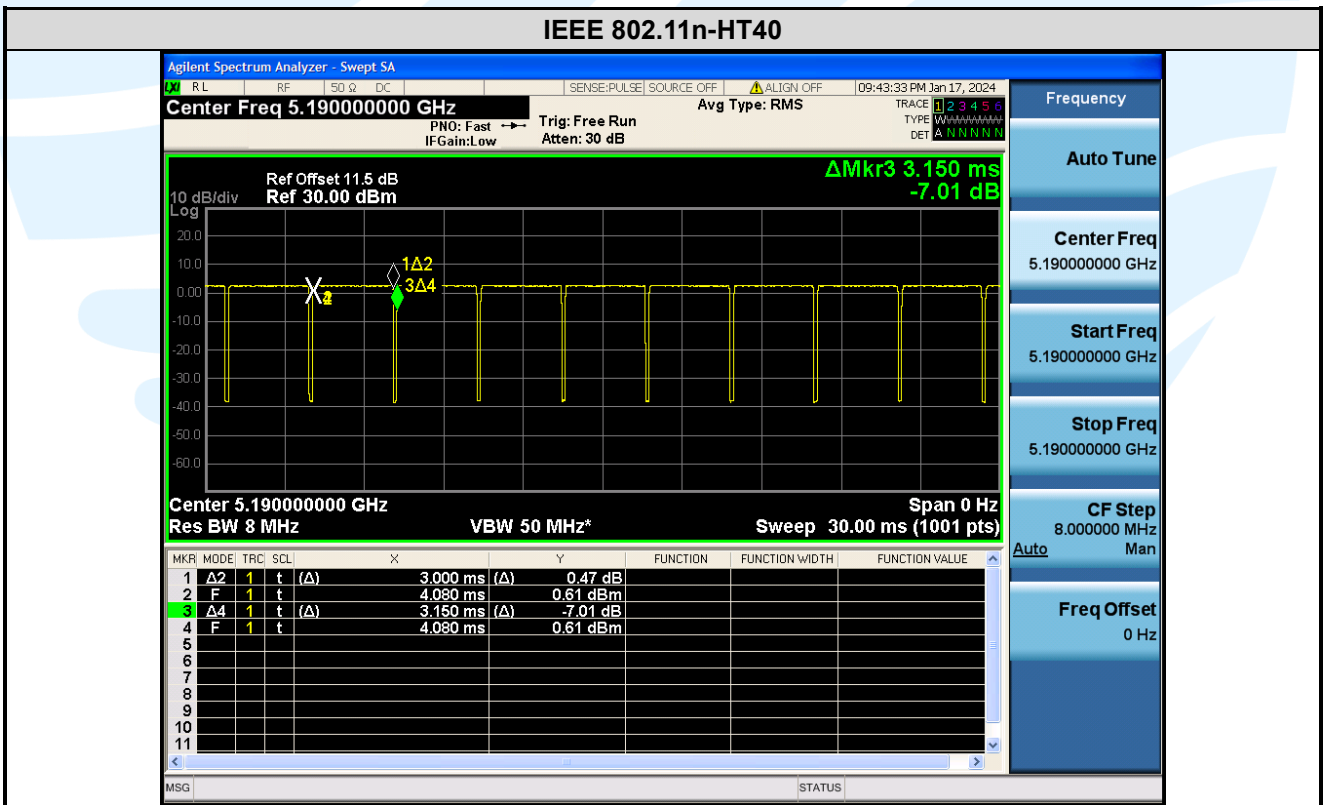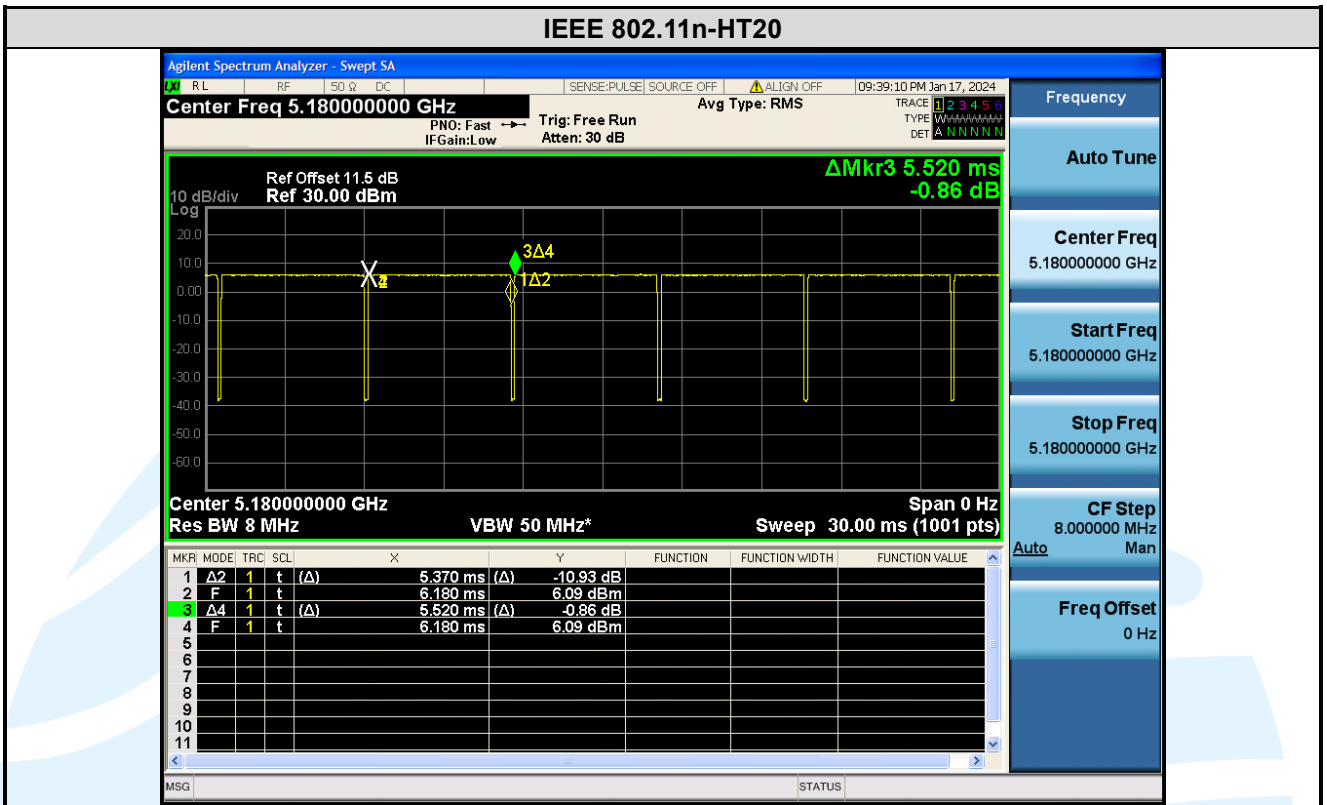

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

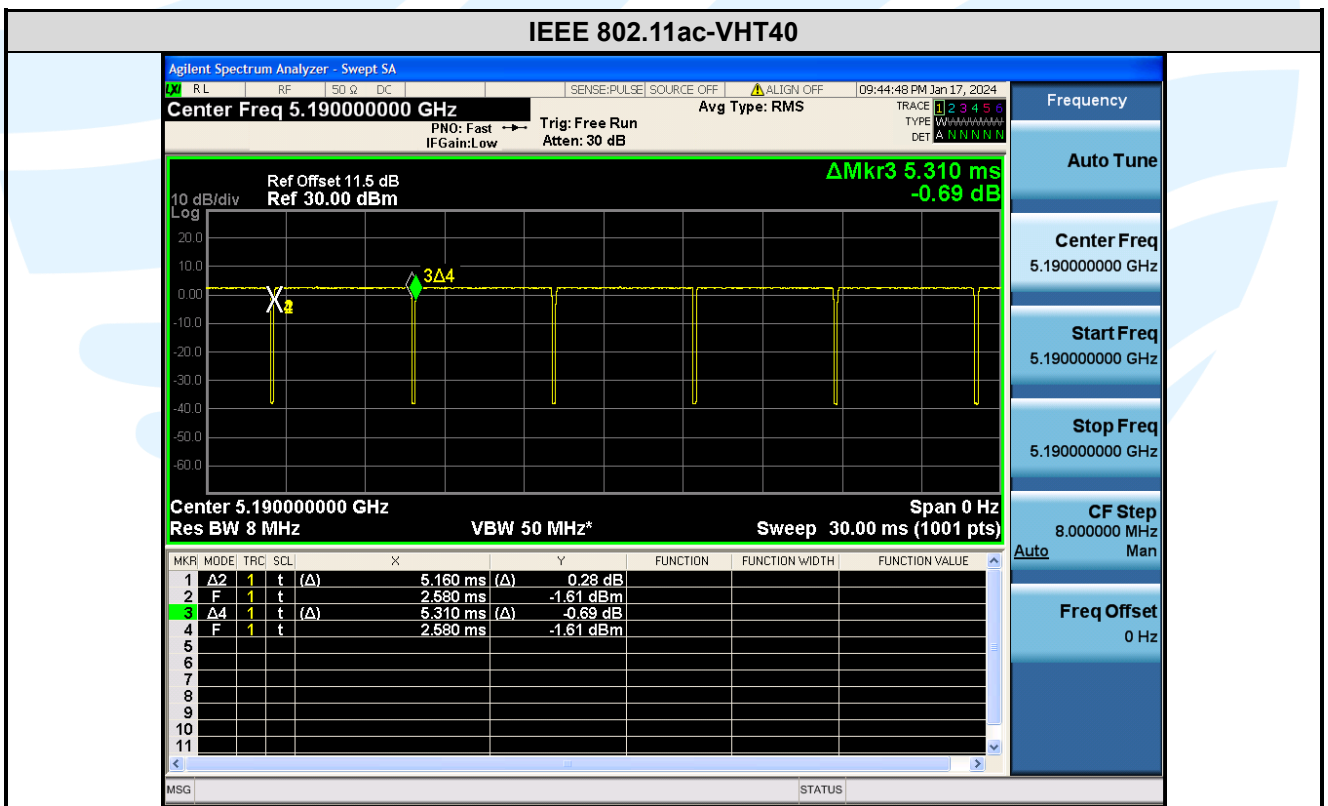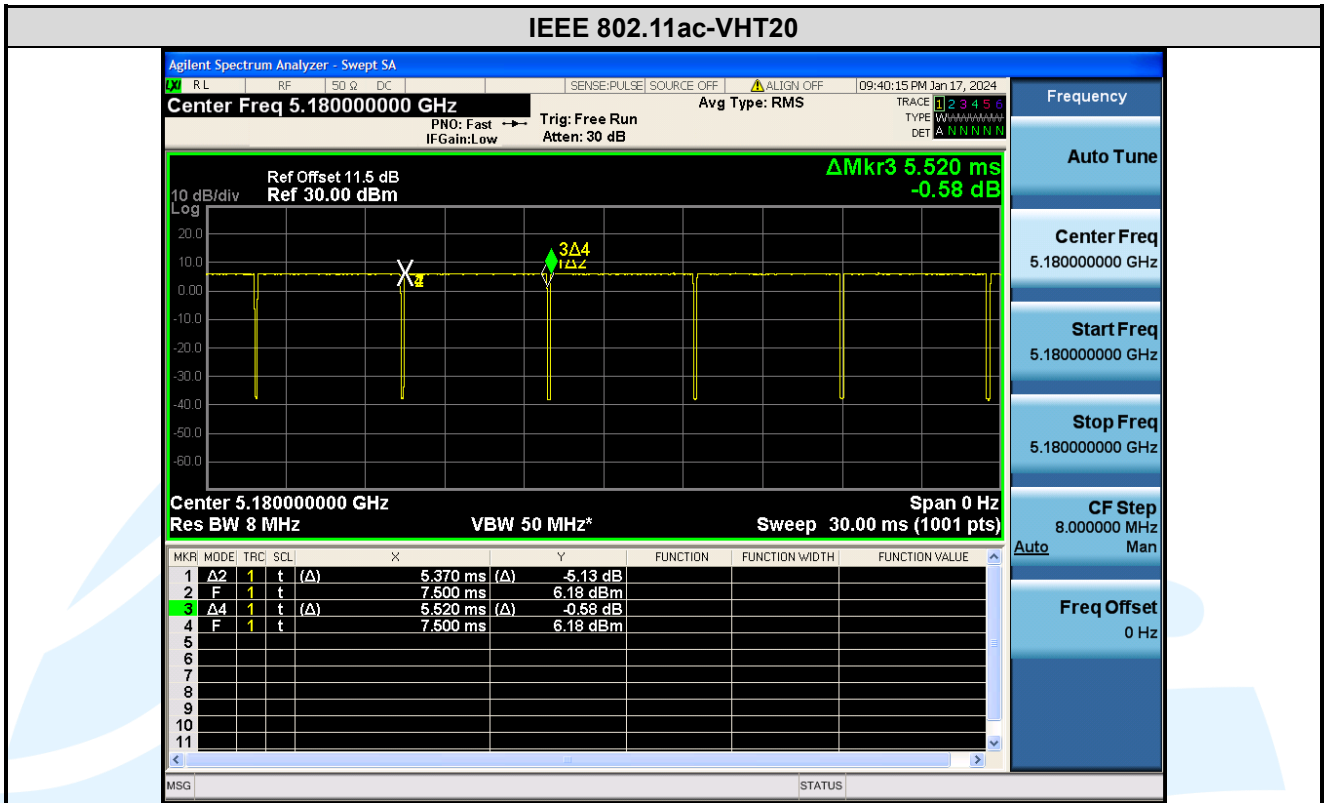

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

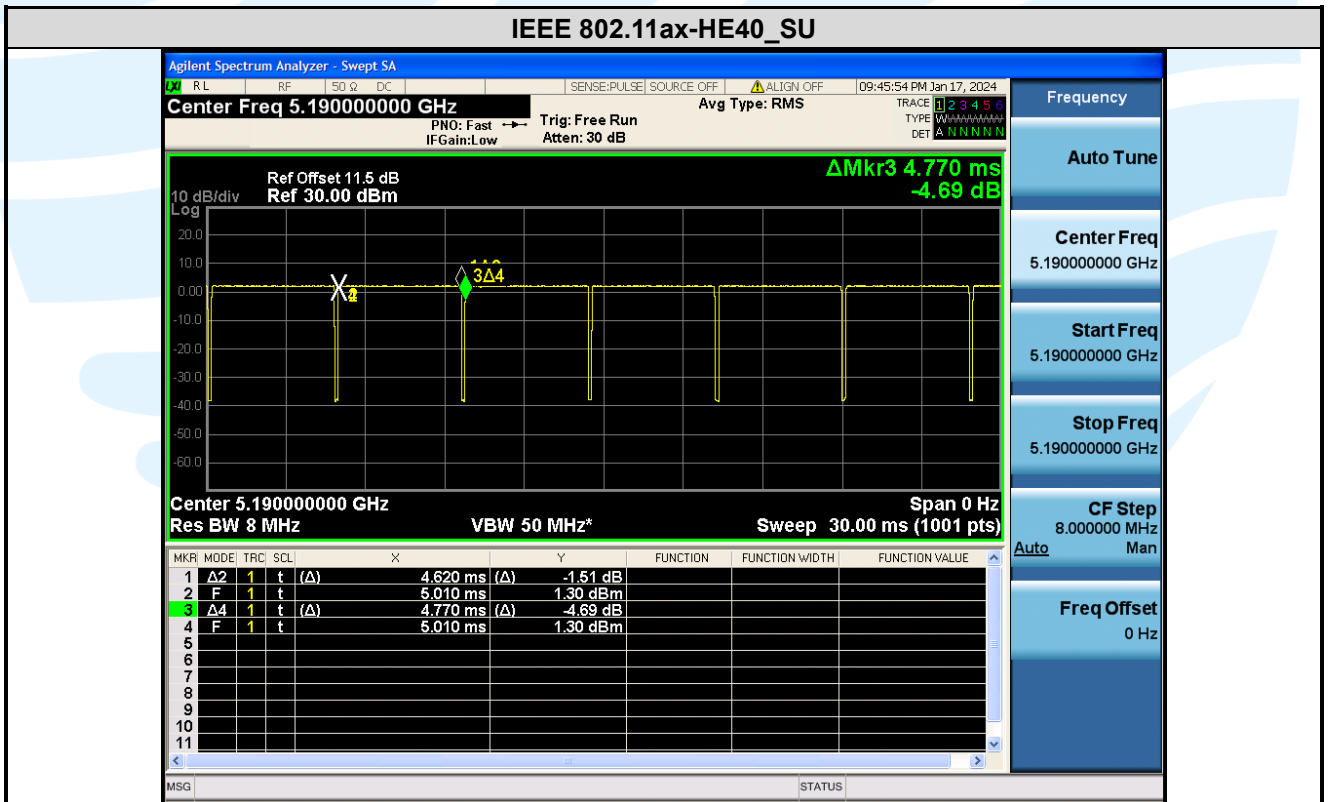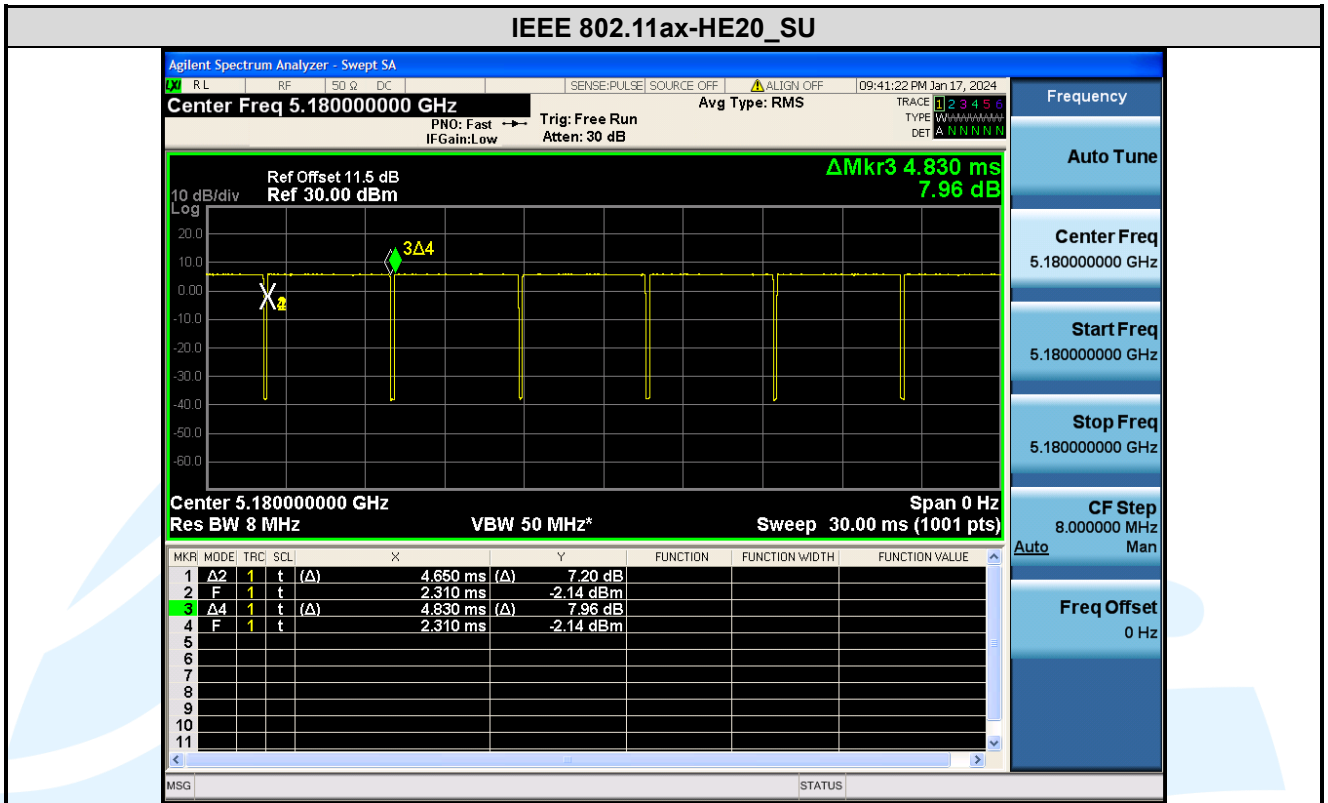



## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	RSS-247 Issue 3	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
6	KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
7	KDB 905462 D06 802.11 Channel Plans New Rules v02	Operation in U-NII bands -802.11 channel PLAN(§15.407)
8	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	Compliance measurement procedures for Unlicensed –National Information Infrastructure devices operates in the frequency bands 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands incorporating dynamic frequency selection
9	KDB 905462 D03 Client Without DFS New Rules v01r02	U-NII client devices without radar detection capability

### 5.2 ANTENNA REQUIREMENT

Standard Requirement
<p><b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.407(a)(1) (2) requirement:</b> The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p><b>RSS-Gen Issue 5, Section 6.8 requirement:</b> According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.</p> <p><b>EUT Antenna:</b> Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 4.5 dBi.</p>

### 5.326 DB BANDWIDTH & OCCUPIED BANDWIDTH

<b>Test Requirement:</b>	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5) RSS-247 Issue 3 Section 6.2.1.2
<b>Test Method:</b>	KDB 789033 D02 v02r01 Section C.1
<b>Limit:</b>	None; for reporting purposes only.
<b>Test Procedure:</b>	

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.

Spectrum analyzer according to the following Settings:

- Set RBW = approximately 1 % of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

<b>Test Setup:</b>	Refer to section 4.5.3 for details.
<b>Instruments Used:</b>	Refer to section 3 for details
<b>Test Mode:</b>	Link mode
<b>Test Results:</b>	<b>Please refer to Appendix A</b>

## 5.46 DB BANDWIDTH & OCCUPIED BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (e)  
RSS-247 Issue 3 Section 6.2.4.1

**Test Method:** KDB 789033 D02 v02r01 Section C.2

**Limit:** Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

**Test Procedure:**

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

**6dB Bandwidth**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 * RBW$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Occupied Bandwidth**

- a) Set RBW = 1% to 5% of the occupied bandwidth
- b) Set the video bandwidth (VBW)  $\geq 3 * RBW$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Please refer to Appendix A

## 5.5 MAXIMUM CONDUCTED OUTPUT POWER OR E.I.R.P

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)  
RSS-247 Issue 3 Section 6.2.1.1/6.2.2.1/6.2.3.1/6.2.4.1

**Test Method:** KDB 789033 D02 v02r01 Section E.3.a (Method PM)

**Limits:** FCC 47 CFR Part 15 Subpart E

1. For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### **Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

Limits: RSS-247 Issue 3

**1. Frequency band 5150-5250 MHz**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10}B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

**2. Frequency band 5250-5350 MHz**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

**Additional requirements**

In addition to the above requirements, devices shall comply with the following, where applicable:

- a) Outdoor fixed devices with a maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where  $\theta$  is the angle above the local horizontal plane (of the Earth) as shown below:
  - i. -13 dBW/MHz for  $0^\circ \leq \theta < 8^\circ$
  - ii.  $-13 - 0.716(\theta - 8)$  dBW/MHz for  $8^\circ \leq \theta < 40^\circ$
  - iii.  $-35.9 - 1.22(\theta - 40)$  dBW/MHz for  $40^\circ \leq \theta \leq 45^\circ$
  - iv. -42 dBW/MHz for  $\theta > 45^\circ$

The measurement procedure defined in Annex A of this document shall be used to verify the compliance to the e.i.r.p. at different elevations.

- b) Devices, other than outdoor fixed devices, having an e.i.r.p. greater than 200 mW shall comply with either i. or ii. below:
  - i. devices shall comply with the e.i.r.p. elevation mask in 6.2.2.3(a); or
  - ii. devices shall implement a method to permanently reduce their e.i.r.p. via a firmware feature in the event that the Department requires it. The test report must demonstrate how the device's power table can be updated to meet this firmware requirement. The manufacturer shall provide this firmware to update all systems automatically in compliance with the directions received from the Department.

**3. Frequency bands 5470-5600 MHz and 5650-5725 MHz**

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

**4. Frequency band 5725-5850 MHz**

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices



operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint<sup>3</sup> systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

**Test Procedure:**

1. Connected the EUT's antenna port to measure device by 10dB attenuator.
2. Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of Tx on burst.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Pass

**Test Data:**

**Gain and the maximum output power limit.**

**RSS-247 Issue 3**

Frequency Band	Antenna Gain (dBi)	Power Limits (dBm)
U-NII-1	4.5	23.0
U-NII-2A	4.5	23.0
U-NII-2C	4.5	24.0
U-NII-3	4.5	30.0

**FCC 47 CFR Part 15 Subpart E**

Frequency Band	Antenna Gain (dBi)	Power Limits (dBm)
U-NII-1	4.5	24.0
U-NII-2A	4.5	24.0
U-NII-2C	4.5	24.0
U-NII-3	4.5	30.0

**Frequency band 5150-5250 MHz**

**RSS-247 Issue 3:**

For IEEE 802.11a, the minimum 99% emission bandwidth is 17.056Hz

$10 \text{ dBm} + 10\log_{10}(17.056) = 22.32 \text{ dBm} < 23 \text{ dBm}$

So the 22.32 dBm limit applicable

For IEEE 802.11n-HT20/ ac-VHT20/ax-HE20, the minimum 99% emission bandwidth is 18.083 MHz

$10 \text{ dBm} + 10\log_{10}(18.083) = 22.57 \text{ dBm} < 23 \text{ dBm}$

So the 22.57 dBm limit applicable

For IEEE 802.11n-HT40/ ac-VHT40/ax-HE40, the minimum 99% emission bandwidth is 36.454 MHz

$10 \text{ dBm} + 10\log_{10}(36.454) = 25.62 \text{ dBm} > 23 \text{ dBm}$

So the 23 dBm limit applicable

**Frequency band 5250-5350 MHz**

**RSS-247 Issue 3:**

For IEEE 802.11 a, the minimum 99% emission bandwidth is 17.076MHz

$11 \text{ dBm} + 10\log_{10}(17.076) = 23.32 \text{ dBm} < 24\text{dBm}$

So the 23.32 dBm limit applicable

For IEEE 802.11n-HT20/ ac-VHT20/ax-HE20, the minimum 99% emission bandwidth is 18.045 MHz

$11 \text{ dBm} + 10\log_{10}(18.045) = 23.56 \text{ dBm} < 24\text{dBm}$

So the 23.56 dBm limit applicable

For IEEE 802.11 n-HT40/ac-VHT40/ax-HE40, the minimum 99% emission bandwidth is 36.443 MHz

$11 \text{ dBm} + 10\log_{10}(36.443) = 26.62 \text{ dBm} > 24 \text{ dBm}$

So the 24 dBm limit applicable

**EIRP:**

For IEEE 802.11 a/n-HT20/ac-VHT20/ax-HE20, the minimum 99% emission bandwidth is 17.076MHz

$17 \text{ dBm} + 10\log_{10}(17.076) = 29.32 \text{ dBm}$

$29.32 \text{ dBm} > 27 \text{ dBm}$

So the 27 dBm limit applicable

For IEEE 802.11 n-HT40/ac-VHT40/ax-HE40, the minimum 99% emission bandwidth is 36.443 MHz

$17 \text{ dBm} + 10\log_{10}(36.443) = 32.62 \text{ dBm} > 27 \text{ dBm}$

So the 27 dBm limit applicable

**FCC 47 CFR Part 15 Subpart E:**

For IEEE 802.11 a/n/ac/ax, the minimum 26 dB emission bandwidth is 21.64 MHz

$11 \text{ dBm} + 10\log_{10}(21.64) = 24.35 \text{ dBm} > 24 \text{ dBm}$

So the 24 dBm limit applicable

**Frequency bands 5470-5725 MHz (RSS-247 Issue 3 Not including 5600-5650 MHz)**

**RSS-247 Issue 3:**

For IEEE 802.11 a, the minimum 99% emission bandwidth is 17.080 MHz

$11 \text{ dBm} + 10\log_{10}(17.080) = 23.32 \text{ dBm} < 24 \text{ dBm}$

So the 23.32 dBm limit applicable

For IEEE 802.11n-HT20/ac-VHT20/ax-HE20, the minimum 99% emission bandwidth is 18.087 MHz

$11 \text{ dBm} + 10\log_{10}(18.087) = 23.57 \text{ dBm} < 24 \text{ dBm}$

So the 23.57 dBm limit applicable

For IEEE 802.11 n-HT40/ac-VHT40/ax-HE40, the minimum 99% emission bandwidth is 36.452 MHz

$11 \text{ dBm} + 10\log_{10}(36.452) = 26.62 \text{ dBm} > 24 \text{ dBm}$

So the 24 dBm limit applicable



**EIRP:**

For IEEE 802.11 a/n-HT20/ac-VHT20/ax-HE20, the minimum 99% emission bandwidth is 17.080 MHz  
 $17 \text{ dBm} + 10\log_{10}(17.080) = 29.32 \text{ dBm}$   
 $29.32 \text{ dBm} > 27 \text{ dBm}$   
 So the 27 dBm limit applicable

For IEEE 802.11 n-HT40/ac-VHT40/ax-HE40, the minimum 99% emission bandwidth is 36.452 MHz  
 $17 \text{ dBm} + 10\log_{10}(36.452) = 32.62 \text{ dBm} > 27 \text{ dBm}$   
 So the 27 dBm limit applicable

**FCC 47 CFR Part 15 Subpart E:**

For IEEE 802.11 a/n/ac/ax, the minimum 26 dB emission bandwidth is 21.55 MHz  
 $11 \text{ dBm} + 10\log_{10}(21.55) = 24.33 \text{ dBm} > 24 \text{ dBm}$   
 So the 24 dBm limit applicable

Mode	Band	Channel	Freq. (MHz)	CONDUCTED AVG POWER				EIRP		
				Meas Value (dBm)	Corr'd Value (dBm)	FCC Limit (dBm)	ISED Limit (dBm)	EIRP (dBm)	ISED Limit (dBm)	Result
IEEE 802.11a	U-NII-1	36	5180	14.69	14.83	24.00	--	19.33	22.32	Pass
		44	5220	13.68	13.82	24.00	--	18.32	22.32	Pass
		48	5240	13.62	13.76	24.00	--	18.26	22.32	Pass
	U-NII-2A	52	5260	14.51	14.65	24.00	23.32	19.15	27.00	Pass
		60	5300	14.64	14.78	24.00	23.32	19.28	27.00	Pass
		64	5320	14.47	14.61	24.00	23.32	19.11	27.00	Pass
	U-NII-2C	100	5500	13.84	13.98	24.00	23.32	18.48	27.00	Pass
		116	5580	13.51	13.65	24.00	23.32	18.15	27.00	Pass
		140	5700	15.53	15.67	24.00	23.32	20.17	27.00	Pass
	U-NII-3	144	5720	14.81	14.95	24.00	23.32	19.45	27.00	Pass
		149	5745	15.13	15.27	30.00	30.00	19.77	--	Pass
		157	5785	15.21	15.35	30.00	30.00	19.85	--	Pass
IEEE 802.11n-HT20	U-NII-1	165	5825	14.82	14.96	30.00	30.00	19.46	--	Pass
		36	5180	14.70	14.82	24.00	--	19.32	22.57	Pass
		44	5220	13.76	13.88	24.00	--	18.38	22.57	Pass
	U-NII-2A	48	5240	13.78	13.90	24.00	--	18.40	22.57	Pass
		52	5260	14.58	14.70	24.00	23.56	19.20	27.00	Pass
		60	5300	14.70	14.82	24.00	23.56	19.32	27.00	Pass
	U-NII-2C	64	5320	14.54	14.66	24.00	23.56	19.16	27.00	Pass
		100	5500	13.93	14.05	24.00	23.57	18.55	27.00	Pass
		116	5580	13.56	13.68	24.00	23.57	18.18	27.00	Pass
		140	5700	15.02	15.14	24.00	23.57	19.64	27.00	Pass
U-NII-3	144	5720	14.88	15.00	24.00	23.57	19.50	27.00	Pass	
	149	5745	15.18	15.30	30.00	30.00	19.80	--	Pass	
	157	5785	15.28	15.40	30.00	30.00	19.90	--	Pass	
IEEE 802.11n-HT40	U-NII-1	165	5825	14.90	15.02	30.00	30.00	19.52	--	Pass
		38	5190	14.27	14.48	24.00	--	18.98	23.01	Pass
	U-NII-2A	46	5230	13.70	13.91	24.00	--	18.41	23.01	Pass
		54	5270	14.26	14.47	24.00	24.00	18.97	27.00	Pass
	U-NII-2C	62	5310	14.40	14.61	24.00	24.00	19.11	27.00	Pass
		102	5510	13.45	13.66	24.00	24.00	18.16	27.00	Pass
		110	5550	13.63	13.84	24.00	24.00	18.34	27.00	Pass
		134	5670	15.34	15.55	24.00	24.00	20.05	27.00	Pass
	U-NII-3	142	5710	14.82	15.03	24.00	24.00	19.53	27.00	Pass
		151	5755	15.26	15.47	30.00	30.00	19.97	--	Pass
159		5795	15.25	15.46	30.00	30.00	19.96	--	Pass	
IEEE 802.11ac-VHT20	U-NII-1	36	5180	14.73	14.85	24.00	--	19.35	22.57	Pass
		44	5220	13.74	13.86	24.00	--	18.36	22.57	Pass

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

	U-NII-2A	48	5240	13.70	13.82	24.00	--	18.32	22.57	Pass	
		52	5260	14.57	14.69	24.00	23.56	19.19	27.00	Pass	
		60	5300	14.73	14.85	24.00	23.56	19.35	27.00	Pass	
		64	5320	14.53	14.65	24.00	23.56	19.15	27.00	Pass	
	U-NII-2C	100	5500	13.91	14.03	24.00	23.57	18.53	27.00	Pass	
		116	5580	13.67	13.79	24.00	23.57	18.29	27.00	Pass	
		140	5700	15.02	15.14	24.00	23.57	19.64	27.00	Pass	
	U-NII-3	144	5720	14.87	14.99	24.00	23.57	19.49	27.00	Pass	
		149	5745	15.19	15.31	30.00	30.00	19.81	--	Pass	
		157	5785	15.37	15.49	30.00	30.00	19.99	--	Pass	
	IEEE 802.11ac-VHT40	U-NII-1	165	5825	14.93	15.05	30.00	30.00	19.55	--	Pass
			38	5190	14.27	14.39	24.00	--	18.89	23.01	Pass
U-NII-2A		46	5230	13.69	13.81	24.00	--	18.31	23.01	Pass	
		54	5270	14.13	14.25	24.00	24.00	18.75	27.00	Pass	
U-NII-2C		62	5310	14.43	14.55	24.00	24.00	19.05	27.00	Pass	
		102	5510	13.67	13.79	24.00	24.00	18.29	27.00	Pass	
		110	5550	13.31	13.43	24.00	24.00	17.93	27.00	Pass	
		134	5670	15.26	15.38	24.00	24.00	19.88	27.00	Pass	
U-NII-3		142	5710	14.76	14.88	24.00	24.00	19.38	27.00	Pass	
		151	5755	15.21	15.33	30.00	30.00	19.83	--	Pass	
			159	5795	15.08	15.20	30.00	30.00	19.70	--	Pass

Mode	Band	Channel	CONDUCTED AVG POWER				EIRP			
			Meas Value (dBm)	Corr'd Value (dBm)	FCC Limit (dBm)	ISED Limit (dBm)	EIRP (dBm)	FCC Limit (dBm)	ISED Limit (dBm)	ISED
IEEE 802.11ax-HE20	U-NII-1	36	14.63	14.79	24.00	--	19.29	--	22.57	Pass
		44	13.67	13.83	24.00	--	18.33	--	22.57	Pass
		48	13.70	13.86	24.00	--	18.36	--	22.57	Pass
	U-NII-2A	52	14.52	14.68	22.50	23.56	19.18	--	27.00	Pass
		60	14.67	14.83	22.50	23.56	19.33	--	27.00	Pass
		64	14.50	14.66	22.50	23.56	19.16	--	27.00	Pass
	U-NII-2C	100	13.86	14.02	22.50	23.57	18.52	--	27.00	Pass
		116	13.63	13.79	22.50	23.57	18.29	--	27.00	Pass
		140	15.01	15.17	22.50	23.57	19.67	--	27.00	Pass
		144	14.85	15.01	22.50	23.57	19.51	--	27.00	Pass
	U-NII-3	144	14.85	15.01	30.00	30.00	19.51	--	--	Pass
		149	15.19	15.35	30.00	30.00	19.85	--	--	Pass
157		15.32	15.48	30.00	30.00	19.98	--	--	Pass	
		165	14.93	15.09	30.00	30.00	19.59	--	--	Pass
IEEE 802.11ax-HE40	U-NII-1	38	14.25	14.39	24.00	--	18.89	--	23.01	Pass
		46	13.67	13.81	24.00	--	18.31	--	23.01	Pass
	U-NII-2A	54	14.23	14.37	22.50	24.00	18.87	--	27.00	Pass
		62	14.40	14.54	22.50	24.00	19.04	--	27.00	Pass
	U-NII-2C	102	13.66	13.80	22.50	24.00	18.30	--	27.00	Pass
		110	13.28	13.42	22.50	24.00	17.92	--	27.00	Pass
		134	15.26	15.40	22.50	24.00	19.90	--	27.00	Pass
		142	14.73	14.87	22.50	24.00	19.37	--	27.00	Pass
	U-NII-3	142	14.73	14.87	30.00	30.00	19.37	--	--	Pass
		151	15.18	15.32	30.00	30.00	19.82	--	--	Pass
159		15.02	15.16	30.00	30.00	19.66	--	--	Pass	

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

## 5.6 PEAK POWER SPECTRAL DENSITY

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)  
RSS-247 Issue 3 Section 6.2.1.1/6.2.2.1/6.2.3.1/6.2.4.1

**Test Method:** KDB 789033 D02 v02r01 Section F

**Limits:** FCC 47 CFR Part 15 Subpart E

1. For the band 5.15-5.25 GHz.
  - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
  - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
  - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
  - (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### **Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

Limits: RSS-247 Issue 3

**1. Frequency band 5150-5250 MHz**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10}B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

**2. Frequency band 5250-5350 MHz**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

**Additional requirements**

In addition to the above requirements, devices shall comply with the following, where applicable:

- a) Outdoor fixed devices with a maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where  $\theta$  is the angle above the local horizontal plane (of the Earth) as shown below:
  - i. -13 dBW/MHz for  $0^\circ \leq \theta < 8^\circ$
  - ii.  $-13 - 0.716(\theta - 8)$  dBW/MHz for  $8^\circ \leq \theta < 40^\circ$
  - iii.  $-35.9 - 1.22(\theta - 40)$  dBW/MHz for  $40^\circ \leq \theta \leq 45^\circ$
  - iv. -42 dBW/MHz for  $\theta > 45^\circ$

The measurement procedure defined in Annex A of this document shall be used to verify the compliance to the e.i.r.p. at different elevations.

- b) Devices, other than outdoor fixed devices, having an e.i.r.p. greater than 200 mW shall comply with either i. or ii. below:
  - iii. devices shall comply with the e.i.r.p. elevation mask in 6.2.2.3(a); or
  - iv. devices shall implement a method to permanently reduce their e.i.r.p. via a firmware feature in the event that the Department requires it. The test report must demonstrate how the device's power table can be updated to meet this firmware requirement. The manufacturer shall provide this firmware to update all systems automatically in compliance with the directions received from the Department.

**3. Frequency bands 5470-5600 MHz and 5650-5725 MHz**

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

**4. Frequency band 5725-5850 MHz**

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices



operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint<sup>3</sup> systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

**Test Procedure:**

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

**1. For U-NII-1, U-NII-2A, U-NII-2C band:**

Using method SA-2

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 1 MHz, Set VBW ≥ 3 RBW, Detector = RMS
- c) Sweep time = auto, trigger set to “free run”.
- d) Trace average at least 100 traces in power averaging mode.
- e) Record the max value and add 10 log (1/duty cycle)

**2. For U-NII-3 band:**

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 500 kHz, Set VBW ≥ 3 RBW, Detector = RMS
- c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- d) Sweep time = auto, trigger set to “free run”.
- e) Trace average at least 100 traces in power averaging mode.
- f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Please refer to Appendix A

**Test Data:**

**Gain and the maximum output power limit.**

**RSS-247 Issue 3:**

Frequency Band	Antenna Gain (dBi)	PSD Limits (dBm/MHz or dBm/500kHz)
U-NII-1	4.5	10.0
U-NII-2A	4.5	10.0
U-NII-2C	4.5	11.0
U-NII-3	4.5	30.0

**FCC 47 CFR Part 15 Subpart E:**

Frequency Band	Antenna Gain (dBi)	PSD Limits (dBm/MHz or dBm/500kHz)
U-NII-1	4.5	11.0
U-NII-2A	4.5	11.0
U-NII-2C	4.5	11.0
U-NII-3	4.5	30.0

### 5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6)  
 FCC 47 CFR Part 15 Subpart C Section 15.209/205  
 RSS-247 Issue 3 Section 6.2.1.2/6.2.2.2/6.2.3.2/6.2.4.2

**Test Method:** KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6

**Receiver Setup:**

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

**Limits:**

**1. Limits of Radiated Emission and Band edge Measurement**

Radiated emissions that fall in the restricted bands must comply with the general emissions limits in 15.209(a) as below table. Other emissions shall be at least 20 dB below the highest level of the desired power.

Frequency	Field strength (microvolt/meter)	Limit (dBµV/m )	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

**Remark:**

- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.



**2. Limits of Unwanted Emission Out of the Restricted Bands**

Applicable To	Limit	
<b>789033 D02 General U-NII Test Procedures New Rules v01r04</b>	<b>Field Strength at 3 m</b>	
	<b>PK: 74 (dBμV/m)</b>	<b>AV: 54 (dBμV/m)</b>
Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
RSS-247 Issue 3 Section 6.2.1.2	PK: -27 (dBm/MHz)	PK: 74 (dBμV/m)
RSS-247 Issue 3 Section 6.2.2.2	PK: -27 (dBm/MHz)	PK: 74 (dBμV/m)
RSS-247 Issue 3 Section 6.2.3.2	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)
RSS-247 Issue 3 Section 6.2.4.2	27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;	PK: 68.2 (dBμV/m)
	15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;	
	10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges;	
	-27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.	

**Test Setup:** Refer to section 4.5.1 for details.

**Test Procedures:**

- The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Remark:**

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for RMS Average (Duty cycle < 98 %) for Average detection (AV) at frequency above 1 GHz, then the measurement results was added to a correction factor (10 log(1/duty cycle)).
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle ≥ 98 %) or ≥ 1/T(duty cycle is < 98%) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass


**The measurement data as follows:**

**Radiated Emission Test Data (9 KHz ~ 30 MHz):**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**Radiated Emission Test Data (30 MHz ~ 1 GHz Worst Case):**  
**Worst-Case Configuration (IEEE 802.11a\_Channel 140)**

**Horizontal**

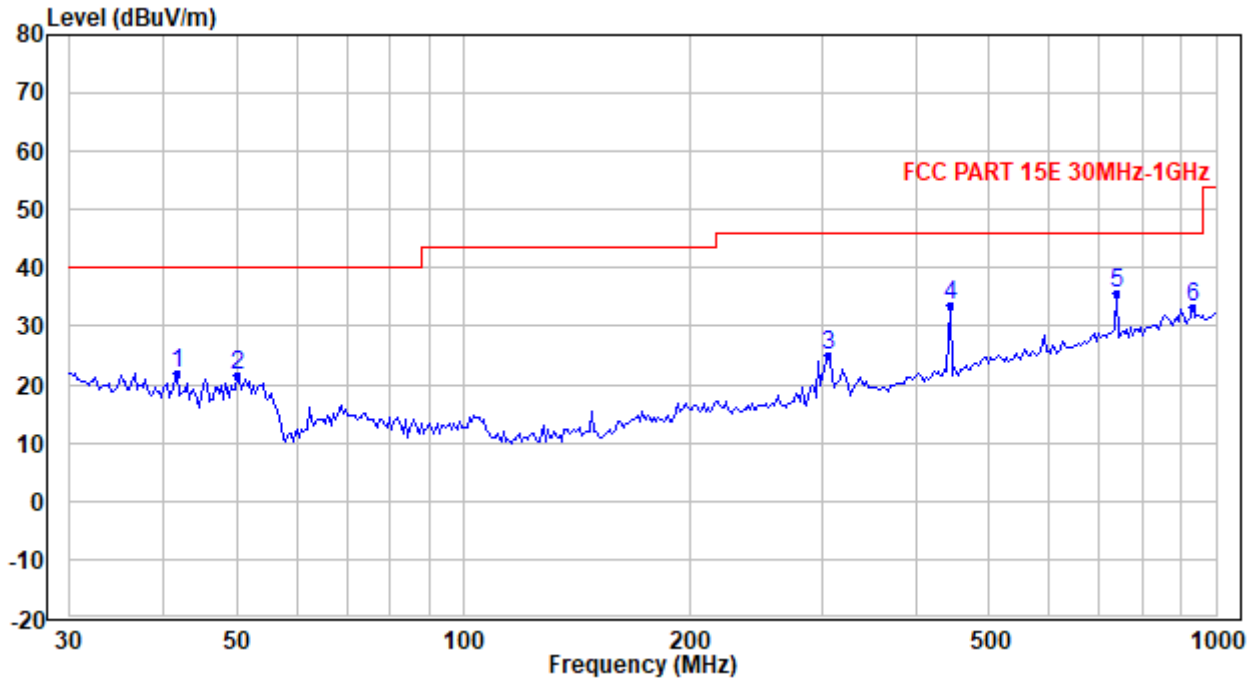

No.	Frequency (MHz)	Reading (dB $\mu$ V/m)	Correction factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	41.741	31.21	-9.39	21.82	40.00	-18.18	QP
2	50.108	35.34	-13.64	21.70	40.00	-18.30	QP
3	304.955	33.80	-8.64	25.16	46.00	-20.84	QP
4	442.572	37.74	-3.99	33.75	46.00	-12.25	QP
5	739.214	33.80	1.99	35.79	46.00	-10.21	QP
6	932.141	28.29	4.82	33.11	46.00	-12.89	QP

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

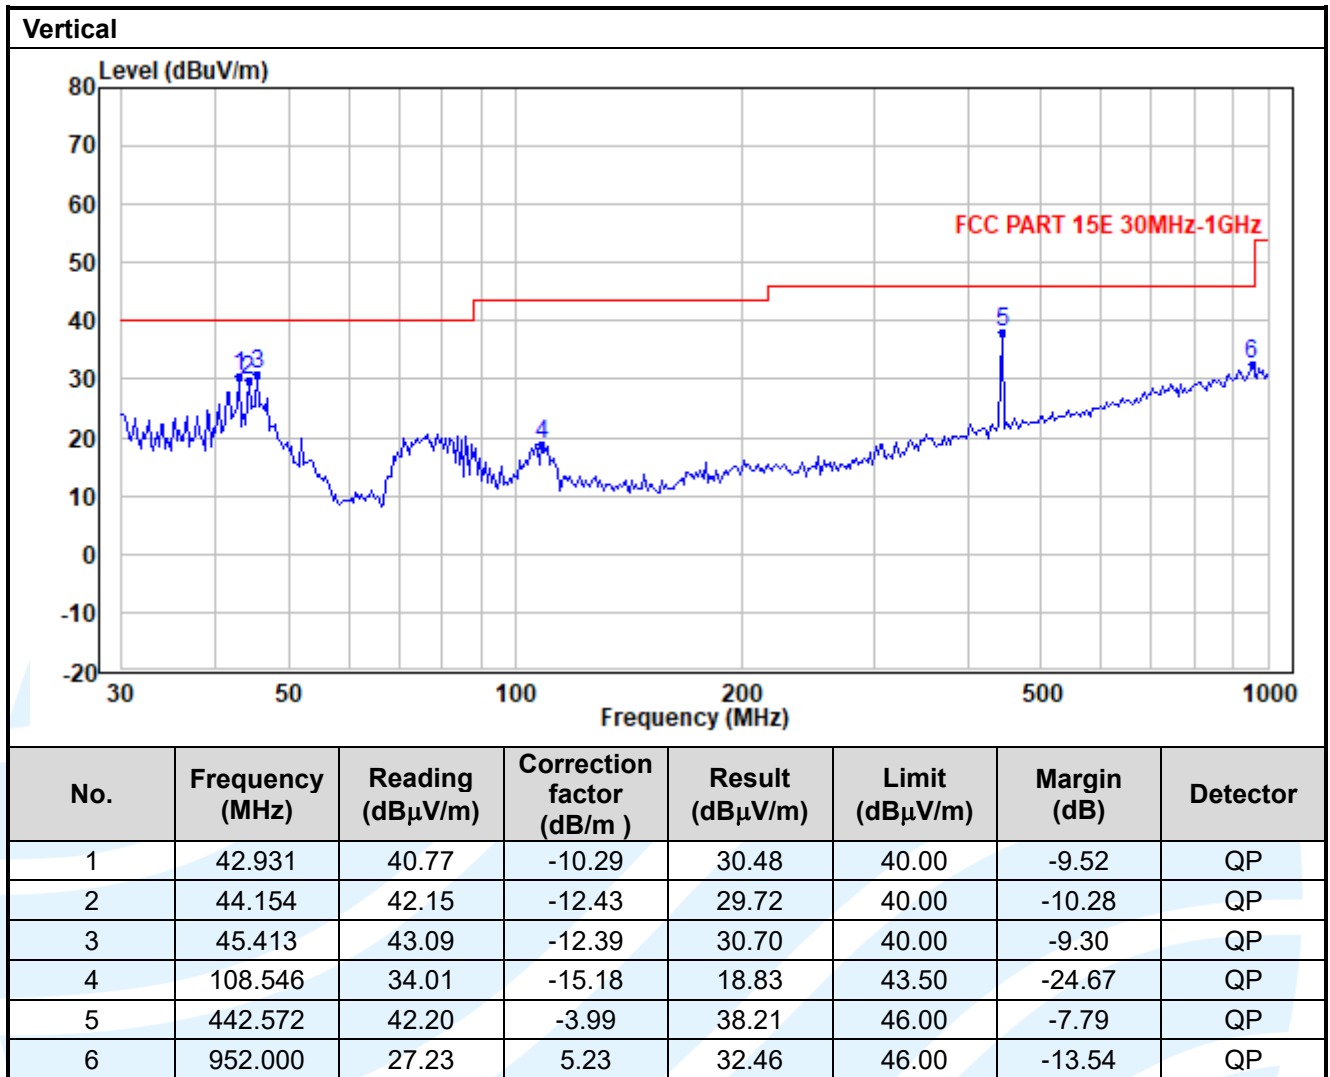

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBµV)	Correction factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Antenna Polaxis
<b>IEEE 802.11a_Channel 36</b>								
1	10360	27.8	6.2	33.9	54	-20.1	Average	Horizontal
2	10360	42.5	6.2	48.6	68.2	-19.6	Peak	Horizontal
3	15540	22.4	11.1	33.5	54	-20.5	Average	Horizontal
4	15540	34.6	11.1	45.7	74	-28.3	Peak	Horizontal
5	10360	28.1	6.2	34.2	54	-19.8	Average	Vertical
6	10360	41.8	6.2	48.0	68.2	-20.2	Peak	Vertical
7	15540	22.4	11.1	33.5	54	-20.5	Average	Vertical
8	15540	34.9	11.1	46.0	74	-28.0	Peak	Vertical
<b>IEEE 802.11a_Channel 44</b>								
1	10440	29.0	6.0	35.1	54	-18.9	Average	Horizontal
2	10440	43.1	6.0	49.1	68.2	-19.1	Peak	Horizontal
3	15660	22.7	11.1	33.8	54	-20.2	Average	Horizontal
4	15660	34.6	11.1	45.7	74	-28.3	Peak	Horizontal
5	10440	29.4	6.0	35.5	54	-18.5	Average	Vertical
6	10440	43.5	6.0	49.5	68.2	-18.7	Peak	Vertical
7	15660	22.8	11.1	33.9	54	-20.1	Average	Vertical
8	15660	35.0	11.1	46.1	74	-28.0	Peak	Vertical
<b>IEEE 802.11a_Channel 48</b>								
1	10480	26.9	6.0	32.9	54	-21.2	Average	Horizontal
2	10480	41.5	6.0	47.4	68.2	-20.8	Peak	Horizontal
3	15720	23.1	11.1	34.2	54	-19.8	Average	Horizontal
4	15720	35.3	11.1	46.4	74	-27.6	Peak	Horizontal
5	10480	26.9	6.0	32.9	54	-21.2	Average	Vertical
6	10480	41.7	6.0	47.7	68.2	-20.5	Peak	Vertical
7	15720	23.2	11.1	34.3	54	-19.7	Average	Vertical
8	15720	35.3	11.1	46.4	74	-27.6	Peak	Vertical
<b>IEEE 802.11a_Channel 52</b>								
1	10520	26.5	5.9	32.4	54	-21.6	Average	Horizontal
2	10520	40.3	5.9	46.2	68.2	-22.0	Peak	Horizontal
3	15780	23.0	11.1	34.1	54	-19.9	Average	Horizontal
4	15780	34.9	11.1	46.0	74	-28.0	Peak	Horizontal
5	10520	26.9	5.9	32.8	54	-21.2	Average	Vertical
6	10520	42.0	5.9	47.9	68.2	-20.3	Peak	Vertical
7	15780	23.1	11.1	34.2	54	-19.8	Average	Vertical
8	15780	34.8	11.1	45.9	74	-28.1	Peak	Vertical

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

No.	Frequency (MHz)	Reading (dBµV)	Correction factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Antenna Polaxis
<b>IEEE 802.11a_Channel 60</b>								
1	10600	24.7	5.8	30.5	54	-23.5	Average	Horizontal
2	10600	37.3	5.8	43.1	74	-30.9	Peak	Horizontal
3	15900	21.9	11.1	33.0	54	-21.0	Average	Horizontal
4	15900	35.2	11.1	46.3	74	-27.7	Peak	Horizontal
5	10600	25.3	5.8	31.1	54	-22.9	Average	Vertical
6	10600	39.5	5.8	45.4	74	-28.6	Peak	Vertical
7	15900	22.0	11.1	33.1	54	-20.9	Average	Vertical
8	15900	34.4	11.1	45.4	74	-28.6	Peak	Vertical
<b>IEEE 802.11a_Channel 64</b>								
1	10640	24.7	5.8	30.5	54	-23.5	Average	Horizontal
2	10640	37.4	5.8	43.2	74	-30.9	Peak	Horizontal
3	15960	22.0	11.0	33.0	54	-21.0	Average	Horizontal
4	15960	34.5	11.0	45.5	74	-28.5	Peak	Horizontal
5	10640	25.4	5.8	31.2	54	-22.8	Average	Vertical
6	10640	38.4	5.8	44.1	74	-29.9	Peak	Vertical
7	15960	22.0	11.0	33.0	54	-21.0	Average	Vertical
8	15960	34.7	11.0	45.7	74	-28.3	Peak	Vertical
<b>IEEE 802.11a_Channel 100</b>								
1	11000	26.6	5.3	31.9	54	-22.1	Average	Horizontal
2	11000	39.5	5.3	44.9	74	-29.1	Peak	Horizontal
3	16500	22.2	12.2	34.3	54	-19.7	Average	Horizontal
4	16500	34.9	12.2	47.0	68.2	-21.2	Peak	Horizontal
5	11000	28.1	5.3	33.4	54	-20.6	Average	Vertical
6	11000	42.1	5.3	47.4	74	-26.6	Peak	Vertical
7	16500	22.2	12.2	34.3	54	-19.7	Average	Vertical
8	16500	34.6	12.2	46.8	68.2	-21.5	Peak	Vertical
<b>IEEE 802.11a_Channel 116</b>								
1	11160	25.1	5.2	30.3	54	-23.7	Average	Horizontal
2	11160	38.4	5.2	43.6	74	-30.4	Peak	Horizontal
3	16740	21.5	12.6	34.1	54	-19.9	Average	Horizontal
4	16740	33.6	12.6	46.2	68.2	-22.0	Peak	Horizontal
5	11160	25.8	5.2	31.0	54	-23.0	Average	Vertical
6	11160	40.6	5.2	45.8	74	-28.2	Peak	Vertical
7	16740	21.6	12.6	34.2	54	-19.8	Average	Vertical
8	16740	33.7	12.6	46.3	68.2	-21.9	Peak	Vertical

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

No.	Frequency (MHz)	Reading (dBµV)	Correction factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Antenna Polaxis
<b>IEEE 802.11a_Channel 140</b>								
1	11400	24.8	5.1	29.8	54	-24.2	Average	Horizontal
2	11400	36.7	5.1	41.8	74	-32.2	Peak	Horizontal
3	17100	21.7	13.3	35.0	54	-19.0	Average	Horizontal
4	17100	33.8	13.3	47.2	68.2	-21.0	Peak	Horizontal
5	11400	25.4	5.1	30.4	54	-23.6	Average	Vertical
6	11400	38.2	5.1	43.2	74	-30.8	Peak	Vertical
7	17100	21.7	13.3	35.0	54	-19.0	Average	Vertical
8	17100	33.6	13.3	46.9	68.2	-21.3	Peak	Vertical
<b>IEEE 802.11a_Channel 144</b>								
1	11440	32.5	2.1	34.6	54	-19.4	Average	Horizontal
2	11440	45.6	2.1	47.7	74	-26.3	Peak	Horizontal
3	17160	31.4	8.9	40.3	54	-13.7	Average	Horizontal
4	17160	43.4	8.9	52.3	68.2	-15.9	Peak	Horizontal
5	11440	32.5	2.1	34.6	54	-19.4	Average	Horizontal
6	11440	45.6	2.1	47.7	74	-26.3	Peak	Horizontal
7	17160	31.4	8.9	40.3	54	-13.7	Average	Horizontal
8	17160	43.4	8.9	52.3	68.2	-15.9	Peak	Horizontal
9	11440	32.8	2.1	34.8	54	-19.2	Average	Vertical
10	11440	46.0	2.1	48.1	74	-25.9	Peak	Vertical
11	17160	31.2	8.9	40.1	54	-13.9	Average	Vertical
12	17160	43.8	8.9	52.7	68.2	-15.5	Peak	Vertical
<b>IEEE 802.11a_Channel 149</b>								
1	11490	23.8	5.0	28.8	54	-25.2	Average	Horizontal
2	11490	35.8	5.0	40.8	74	-33.3	Peak	Horizontal
3	17235	21.3	13.8	35.1	54	-18.9	Average	Horizontal
4	17235	33.7	13.8	47.5	68.2	-20.7	Peak	Horizontal
5	11490	24.0	5.0	29.0	54	-25.0	Average	Vertical
6	11490	36.2	5.0	41.2	74	-32.8	Peak	Vertical
7	17235	21.4	13.8	35.2	54	-18.8	Average	Vertical
8	17235	33.9	13.8	47.8	68.2	-20.4	Peak	Vertical
<b>IEEE 802.11a_Channel 157</b>								
1	11570	24.6	5.0	29.6	54	-24.5	Average	Horizontal
2	11570	36.8	5.0	41.7	74	-32.3	Peak	Horizontal
3	17355	21.7	14.3	36.0	54	-18.0	Average	Horizontal
4	17355	33.6	14.3	47.9	68.2	-20.3	Peak	Horizontal
5	11570	24.8	5.0	29.7	54	-24.3	Average	Vertical
6	11570	36.7	5.0	41.6	74	-32.4	Peak	Vertical
7	17355	21.7	14.3	36.0	54	-18.0	Average	Vertical
8	17355	33.8	14.3	48.0	68.2	-20.2	Peak	Vertical

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1



No.	Frequency (MHz)	Reading (dBµV)	Correction factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Antenna Polaxis
<b>IEEE 802.11a_Channel 165</b>								
1	11650	25.1	4.9	30.0	54	-24.0	Average	Horizontal
2	11650	37.5	4.9	42.4	74	-31.6	Peak	Horizontal
3	17475	21.1	14.7	35.8	54	-18.2	Average	Horizontal
4	17475	34.0	14.7	48.7	68.2	-19.5	Peak	Horizontal
5	11650	25.3	4.9	30.2	54	-23.8	Average	Vertical
6	11650	37.8	4.9	42.7	74	-31.3	Peak	Vertical
7	17475	21.1	14.7	35.8	54	-18.2	Average	Vertical
8	17475	33.1	14.7	47.8	68.2	-20.4	Peak	Vertical
<b>IEEE 802.11n-HT20_Channel 36</b>								
1	10360	27.0	6.2	33.2	54	-20.8	Average	Horizontal
2	10360	42.9	6.2	49.1	68.2	-19.2	Peak	Horizontal
3	15540	22.5	11.1	33.6	54	-20.4	Average	Horizontal
4	15540	34.6	11.1	45.7	74	-28.3	Peak	Horizontal
5	10360	28.2	6.2	34.3	54	-19.7	Average	Vertical
6	10360	44.4	6.2	50.6	68.2	-17.6	Peak	Vertical
7	15540	22.6	11.1	33.7	54	-20.3	Average	Vertical
8	15540	35.0	11.1	46.1	74	-27.9	Peak	Vertical
<b>IEEE 802.11n-HT20_Channel 44</b>								
1	10440	29.4	6.0	35.5	54	-18.5	Average	Horizontal
2	10440	43.5	6.0	49.5	68.2	-18.7	Peak	Horizontal
3	15660	22.9	11.1	34.0	54	-20.0	Average	Horizontal
4	15660	34.9	11.1	46.0	74	-28.0	Peak	Horizontal
5	10440	28.8	6.0	34.9	54	-19.1	Average	Vertical
6	10440	43.5	6.0	49.6	68.2	-18.6	Peak	Vertical
7	15660	23.0	11.1	34.1	54	-19.9	Average	Vertical
8	15660	35.0	11.1	46.1	74	-27.9	Peak	Vertical
<b>IEEE 802.11n-HT20_Channel 48</b>								
1	10480	26.9	6.0	32.9	54	-21.2	Average	Horizontal
2	10480	40.9	6.0	46.9	68.2	-21.3	Peak	Horizontal
3	15720	22.8	11.1	33.9	54	-20.1	Average	Horizontal
4	15720	34.6	11.1	45.6	74	-28.4	Peak	Horizontal
5	10480	26.7	6.0	32.7	54	-21.4	Average	Vertical
6	10480	41.4	6.0	47.4	68.2	-20.8	Peak	Vertical
7	15720	22.8	11.1	33.9	54	-20.1	Average	Vertical
8	15720	35.2	11.1	46.3	74	-27.7	Peak	Vertical

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1