



Certificate #4312.01

# TEST REPORT

**Product Name:** IP Phone  
**Trade Mark:** GRANDSTREAM  
**Model No.:** GRP2636  
**HVIN:** GRP2636V2  
**Report Number:** 24032510329RFC-1  
**Test Standards:** FCC 47 CFR Part 15 Subpart C  
 RSS-247 Issue 3  
 RSS-Gen Issue 5  
**FCC ID:** YZZGRP2636V2  
**IC:** 11964A-GRP2636V2  
**Test Result:** PASS  
**Date of Issue:** July 20, 2024

Prepared for:

**Grandstream Networks, Inc.**  
**126 Brookline Ave., 3rd Floor Boston, MA 02215, USA**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Prepared by: David Chen  
 David Chen  
 Senior Project Engineer

Reviewed by: Henry Lu  
 Henry Lu  
 Team Leader

Approved by: Robben Chen  
 Robben Chen  
 Assistant Manager

Date: July 20, 2024

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

**Version**

Version No.	Date	Description
V1.0	July 20, 2024	Original



**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

## CONTENTS

<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
1.1. CLIENT INFORMATION .....	4
1.2. EUT INFORMATION .....	4
1.2.1 GENERAL DESCRIPTION OF EUT .....	4
1.2.2 DESCRIPTION OF ACCESSORIES .....	5
1.3. PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....	6
1.4. OTHER INFORMATION.....	6
1.5. DESCRIPTION OF SUPPORT UNITS .....	6
1.6. TEST LOCATION.....	6
1.7. TEST FACILITY.....	7
1.8. DEVIATION FROM STANDARDS .....	7
1.9. ABNORMALITIES FROM STANDARD CONDITIONS.....	7
1.10. OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
1.11. MEASUREMENT UNCERTAINTY .....	8
<b>2. TEST SUMMARY</b> .....	<b>9</b>
<b>3. EQUIPMENT LIST</b> .....	<b>10</b>
<b>4. TEST CONFIGURATION</b> .....	<b>12</b>
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING.....	12
4.1.1 NORMAL OR EXTREME TEST CONDITIONS .....	12
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE .....	12
4.2 TEST CHANNELS .....	12
4.3 EUT TEST STATUS .....	12
4.4 TEST SETUP .....	13
4.4.1 FOR RADIATED EMISSIONS TEST SETUP .....	13
4.4.2 FOR CONDUCTED EMISSIONS TEST SETUP .....	14
4.4.3 FOR CONDUCTED RF TEST SETUP .....	15
4.5 SYSTEM TEST CONFIGURATION .....	15
4.6 DUTY CYCLE .....	16
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>19</b>
5.1 REFERENCE DOCUMENTS FOR TESTING .....	19
5.2 ANTENNA REQUIREMENT .....	19
5.3 CONDUCTED PEAK OUTPUT POWER.....	20
5.4 6 DB BANDWIDTH & OCCUPIED BANDWIDTH.....	21
5.5 POWER SPECTRAL DENSITY .....	22
5.6 CONDUCTED OUT OF BAND EMISSION .....	23
5.7 RADIATED SPURIOUS EMISSIONS.....	24
5.8 BAND EDGE MEASUREMENTS (RADIATED).....	26
5.9 CONDUCTED EMISSION .....	27
<b>APPENDIX A RF TEST DATA</b> .....	<b>30</b>
A.1 99% BANDWIDTH .....	30
A.2 6DB BANDWIDTH.....	32
A.3 CONDUCTED OUT OF BAND EMISSION.....	35
A.4 POWER SPECTRAL DENSITY .....	40
A.5 RADIATED SPURIOUS EMISSIONS.....	43
A.6 BAND EDGE MEASUREMENTS (RADIATED).....	57
<b>APPENDIX 1 PHOTOS OF TEST SETUP</b> .....	<b>65</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>65</b>

## 1. GENERAL INFORMATION

### 1.1. CLIENT INFORMATION

<b>Applicant:</b>	Grandstream Networks, Inc.
<b>Address of Applicant:</b>	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
<b>Manufacturer:</b>	Grandstream Networks, Inc.
<b>Address of Manufacturer:</b>	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

## 1.2. EUT INFORMATION

### 1.2.1 General Description of EUT

<b>Product Name:</b>	IP Phone		
<b>Model No.:</b>	GRP2636		
<b>HVIN:</b>	GRP2636V2		
<b>Trade Mark:</b>	GRANDSTREAM		
<b>DUT Stage:</b>	Production Unit		
<b>EUT Supports Function:</b> (Provided by the customer)	2.4 GHz ISM Band:	IEEE 802.11b/g/n/ax	
		Bluetooth V5.0	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac/ax
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac/ax
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac/ax
	5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac/ax	
<b>Sample Received Date:</b>	March 23, 2024		
<b>Sample Tested Date:</b>	April 24, 2024 to June 17, 2024		

**Remark:** The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.

**1.2.2 Description of Accessories**

<b>Adapter (1)</b>	
<b>Model No.:</b>	GQ12-120100-AU
<b>Manufacture:</b>	Dong Guan City GangQi Electronic Co., Ltd.
<b>Input:</b>	100-240V~50/60Hz 0.4 A Max
<b>Output:</b>	12.0V==1.0 A
<b>DC Cable</b>	2.5 Meter, Unshielded without ferrite

<b>Adapter (2)</b>	
<b>Model No.:</b>	F12US1200100A
<b>Manufacture:</b>	SHENZHEN SUNLIGHT ELECTRONIC TECHNOLOGY CO LTD
<b>Input:</b>	100-240V~50/60Hz 0.5 A Max
<b>Output:</b>	12.0V==1.0 A
<b>DC Cable</b>	2.5 Meter, Unshielded without ferrite

<b>Adapter (3)</b>	
<b>Model No.:</b>	DCT12W120100US-A2
<b>Manufacture:</b>	Zhuzhou Dachuan Electronic Technology Co., Ltd.
<b>Input:</b>	100-240V~50/60Hz 0.3 A Max
<b>Output:</b>	12.0V==1.0 A
<b>DC Cable</b>	2.5 Meter, Unshielded without ferrite

<b>Cable(1)</b>	
<b>Description:</b>	Ethernet Cable
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	1.5 Meter

<b>Cable(2)</b>	
<b>Description:</b>	Phone Cord
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	3.5 Meter

<b>Others</b>	
1x Handset, 1x Phone Stand	

### 1.3. PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Frequency Band:</b>	2400 MHz to 2483.5 MHz
<b>Frequency Range:</b>	2402 MHz to 2480 MHz
<b>Bluetooth Version:</b>	Bluetooth LE/2LE/LE Code
<b>Type of Modulation:</b>	GFSK
<b>Number of Channels:</b>	40
<b>Channel Separation:</b>	2 MHz
<b>Antenna Type:</b>	Dipole Antenna
<b>Antenna Gain:</b> (Provided by the customer)	3.5 dBi
<b>Maximum Peak Power:</b>	7.88 dBm
<b>Normal Test Voltage:</b>	12Vdc

### 1.4. OTHER INFORMATION

Operation Frequency Each of Channel	
$f = 2402 + 2k \text{ MHz}, k = 0, \dots, 39$	
Note:	
<b>f</b>	is the operating frequency (MHz);
<b>k</b>	is the operating channel.

### 1.5. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	DELL	Latitude 3400	16238087894	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust

### 1.6. TEST LOCATION

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

Tests were sub-contracted. (Radiated Emissions and Band Edge Measurement)

**Dongguan DN Testing Co., Ltd.**

Address: No. 1, West 4th Street, Xingfa South Road, Wusha Community, Chang'an Town, Dongguan, People's Republic of China

Telephone: +86-769-88087383

Email: joise.yang@dn-testing.com

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

## 1.7. TEST FACILITY

---

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

**A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**ISED Wireless Device Testing Laboratories**

CAB identifier: CN0032

**FCC Accredited Lab.**

Designation Number: CN1194

Test Firm Registration Number: 259480

**Dongguan DN Testing Co., Ltd.**

**A2LA-Lab Certificate No.: 7050.01**

**ISED Wireless Device Testing Laboratories:** CAB identifier: CN0149

**FCC Accredited Lab.:** Designation Number: CN1348

---

## 1.8. DEVIATION FROM STANDARDS

None.

## 1.9. ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10. OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

### 1.11. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	2.4 GHz: ± 6.5 × 10 <sup>-8</sup>
12	Transmission Time	± 0.19 %



## 2. TEST SUMMARY

Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)(4) RSS-Gen Issue 5, Section 6.8	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3) RSS-247 Issue 3, Section 5.4(d)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2) RSS-247 Issue 3, Section 5.2(a)	ANSI C63.10-2013 Clause 11.8.1	PASS
Occupied Bandwidth	RSS-Gen Issue 5, Section 6.7	RSS-Gen Issue 5, Section 6.7	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e) RSS-247 Issue 3, Section 5.2(b)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 3, Section 5.5	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-Gen Issue 5, Section 6.13/8.9/8.10	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-247 Issue 3, Section 5.5	ANSI C63.10-2013 Clause 11.13	PASS
<b>Disclaimer and Explanations:</b> The declared of product specification and data (e.g. antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m SAC	ETS-LINDGREN	3m	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	29-Mar-2024	28-Mar-2025
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Band Rejection Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G590	17-Jan-2024	16-Jan-2025
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	01-Apr-2024	31-Mar-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-Lindgren	00118385	00201874	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-Lindgren	00118384	00202652	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY51286807	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	27-Oct-2023	26-Oct-2024
<input type="checkbox"/>	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	27-Oct-2023	26-Oct-2024

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

**Dongguan DN Testing Co., Ltd.**

Test Equipment for Radiated Emission(30MHz-1000MHz)						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	102497	2023-10-24	2024-10-23
<input checked="" type="checkbox"/>	Test Software	Tonscend	JS32-RE V5.0.0	NA	NA	NA
<input checked="" type="checkbox"/>	RF Cable	ETS-LINDGREN	RFC-NMS-100-NMS-350-IN	DNT-001	2023-10-24	2024-10-23
<input checked="" type="checkbox"/>	Log periodic antenna	ETS-LINDGREN	VULB 9168	01475	2023-10-24	2024-10-23
<input checked="" type="checkbox"/>	Pre-amplifier	Schwarzbeck	BBV9743B	00423	2023-10-24	2024-10-23

Test Equipment for Radiated Emission(Above 1000MHz)						
<input checked="" type="checkbox"/>	Frequency analyser	Keysight	N9010A	MY52221458	2023-10-24	2024-10-23
<input checked="" type="checkbox"/>	RF Cable	ETS-LINDGREN	RFC-NMS-100-NMS-350-IN	DNT-002	2023-10-24	2024-10-23
<input checked="" type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00252567	2023-10-24	2024-10-23
<input checked="" type="checkbox"/>	Double ridged waveguide antenna	ETS-LINDGREN	3116C	00251780	2023-10-24	2024-10-23
<input checked="" type="checkbox"/>	Test Software	Tonscend	JS32-RE V5.0.0	NA	NA	NA
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	3117-PA	252567	2023-10-24	2024-10-23
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	3116C-PA	251780	2023-10-24	2024-10-23

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	12	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

#### 4.1.2 Record of Normal Environment and Test Sample

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	23.6	43.7	100.4	S202403232936-ZJA02/4	Linson Xie
Conducted Peak Output Power	24.5	44.6	100.6	S202403232936-ZJA04/4	Allen Zhou
6dB Bandwidth & Occupied Bandwidth					
Power Spectral Density					
Conducted Out of Band Emission	22.6	53.9	100.6	S202403232936-ZJA03/4	Fire Huo
Radiated Spurious Emissions					
Band Edge Measurements (Radiated)	22.6	53.9	100.6		

### 4.2 TEST CHANNELS

Type of Modulation	Tx/Rx Frequency	Test RF Channel Lists		
GFSK	2402 MHz to 2480 MHz	Lowest(L)	Middle(M)	Highest(H)
		Channel 0	Channel 19	Channel 39
		2402 MHz	2440 MHz	2480 MHz

### 4.3 EUT TEST STATUS

Type of Modulation	Tx Function	Description
GFSK	1Tx	1. Keep the EUT in continuously transmitting with modulation test single.

Power Setting(Provided by the customer)
Power Setting: not applicable, test used software default power level.

Test Software(Provided by the customer)
Test software name: Putty

### 4.4 TEST SETUP

#### 4.4.1 For Radiated Emissions test setup

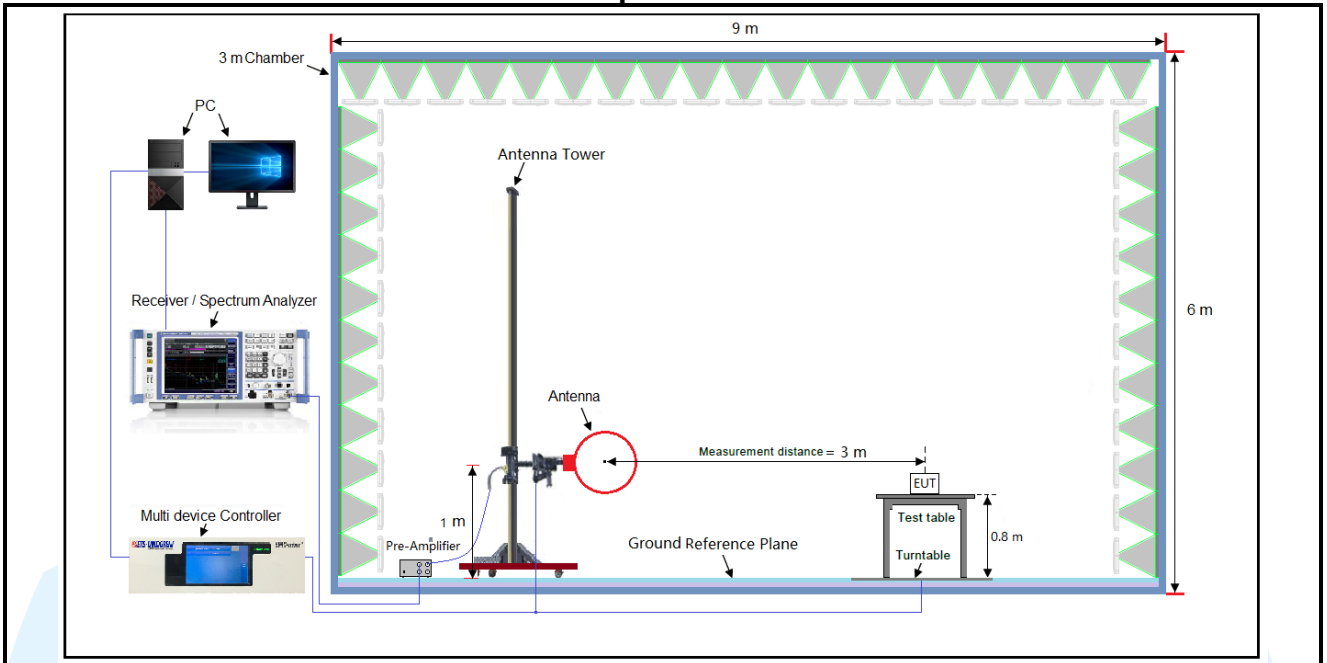


Figure 1. Below 30MHz



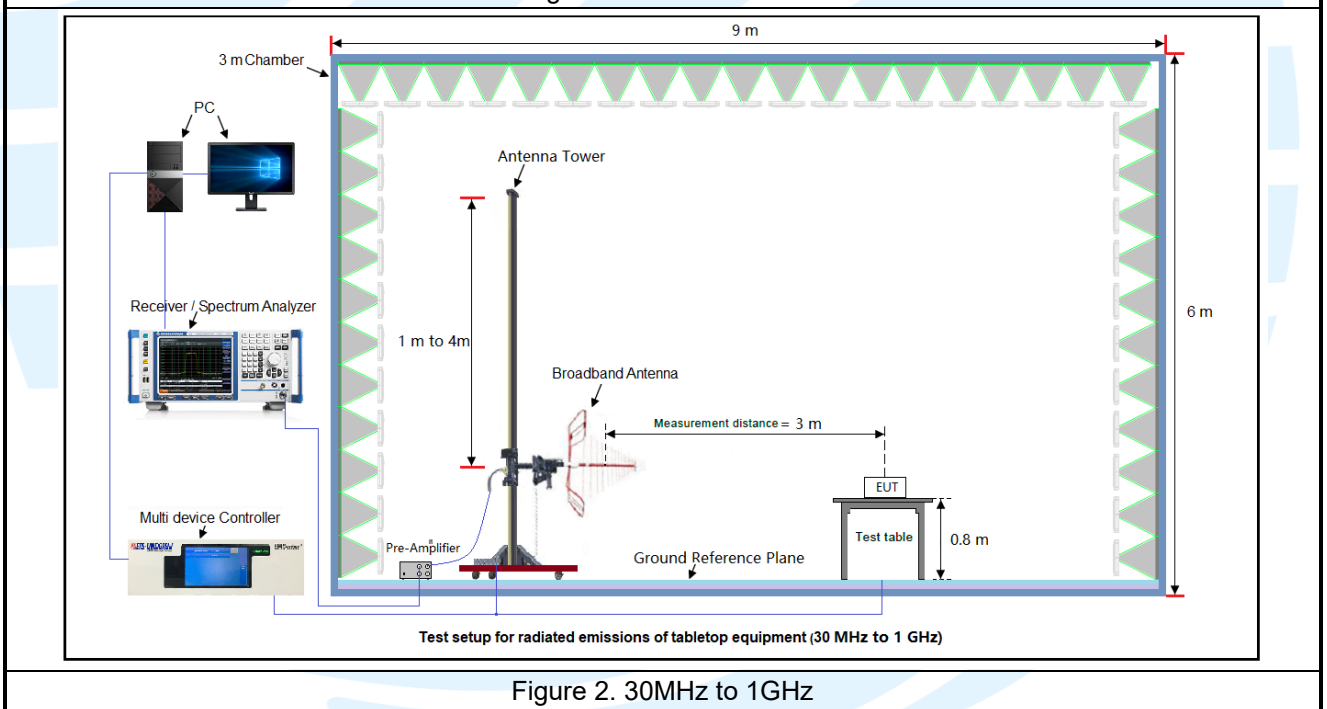



Figure 2. 30MHz to 1GHz

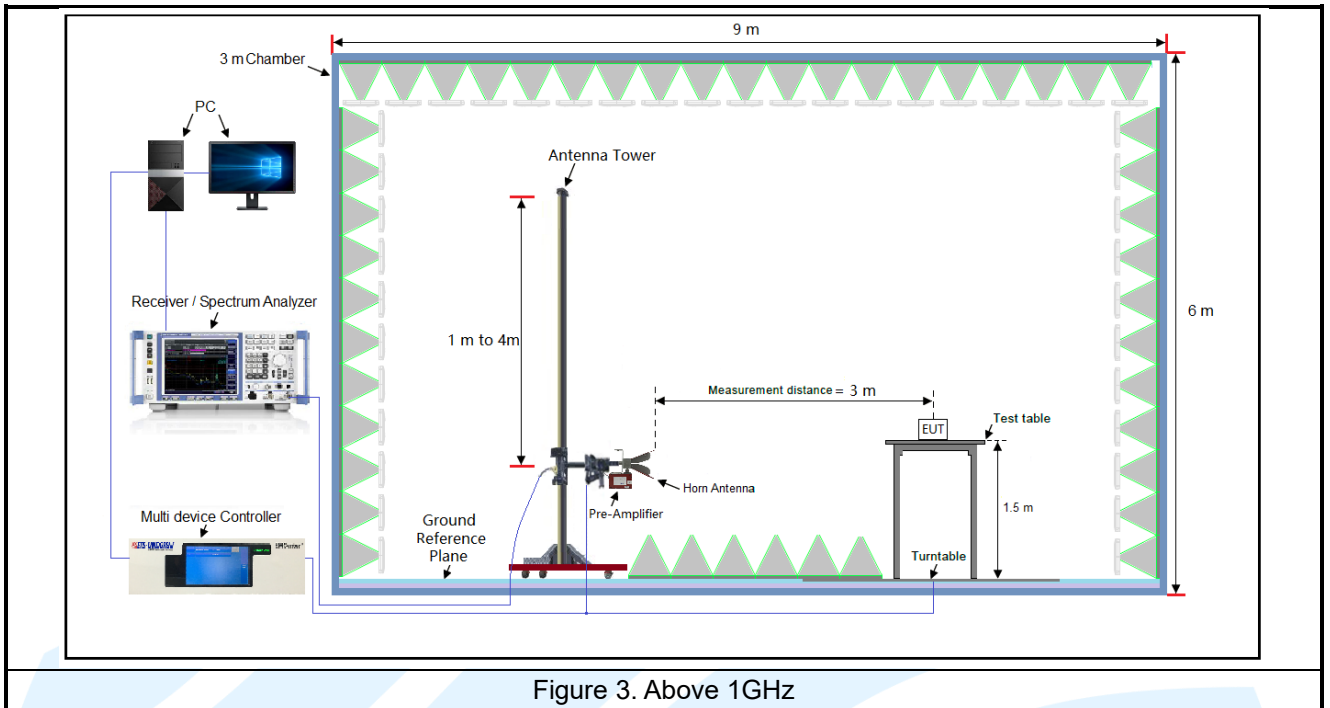

#### 4.4.2 For Conducted Emissions test setup

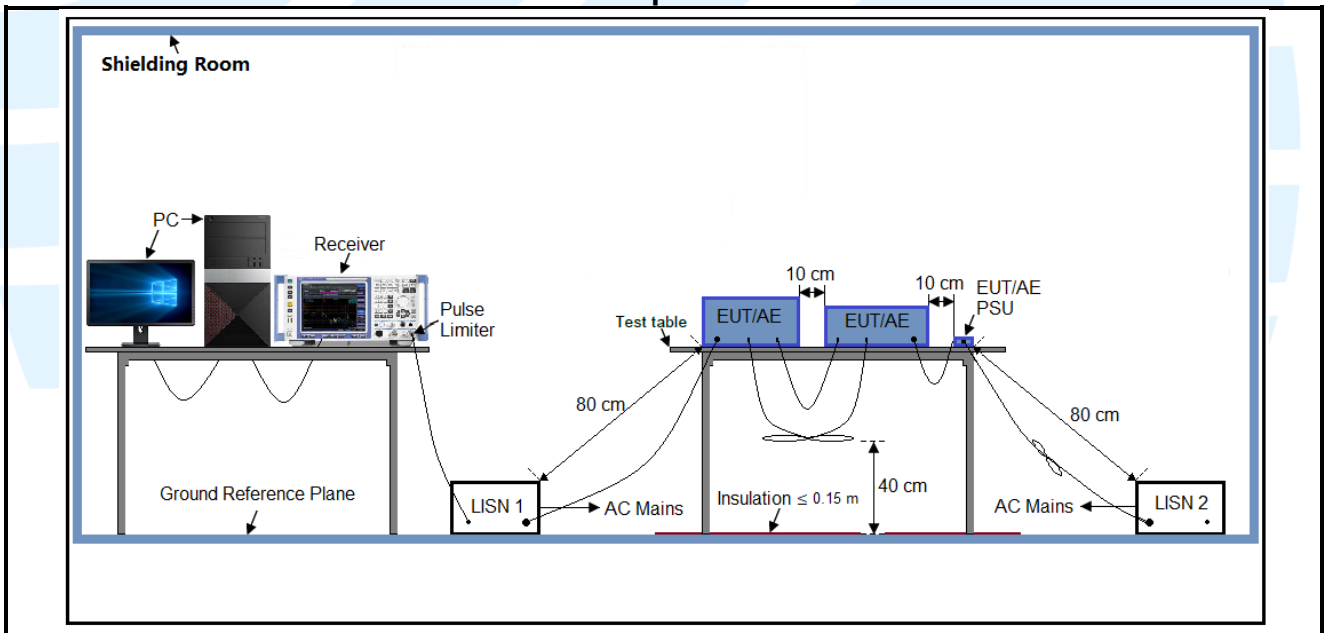

#### 4.4.3 For Conducted RF test setup

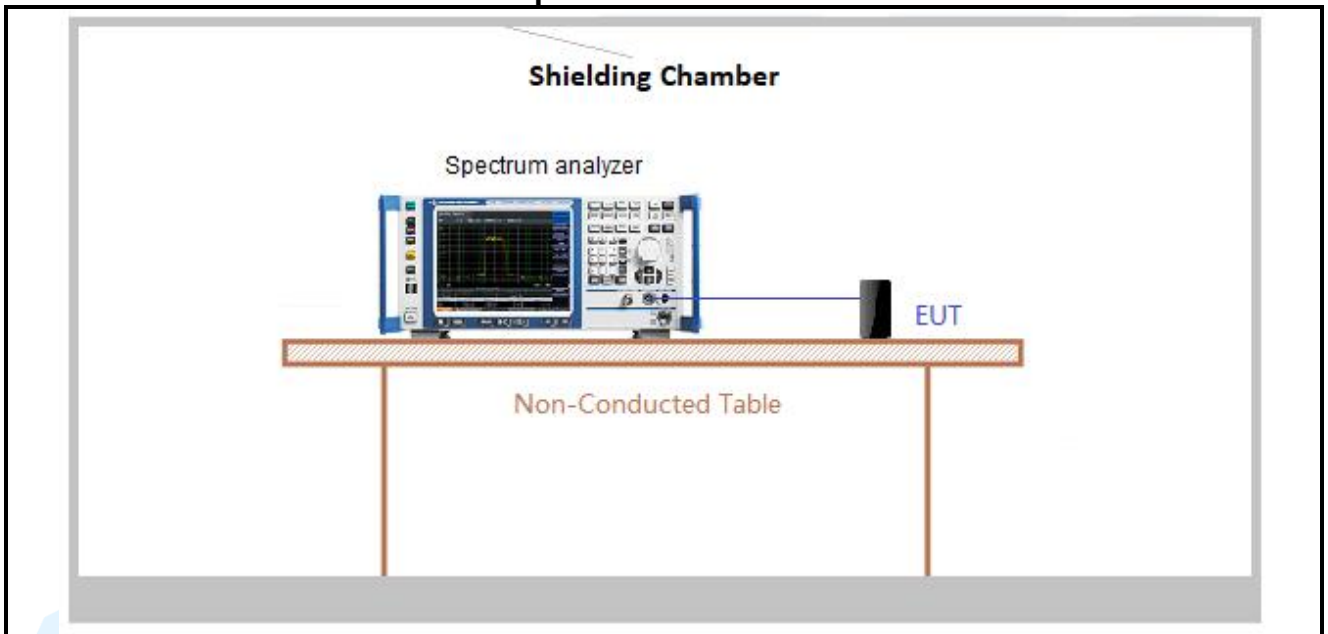

### 4.5 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.



### 4.6 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


**Test Results**

Mode	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
LE	0.375	0.625	0.60	60.00	2.22	2.67
2LE	0.190	0.625	0.30	30.40	5.17	5.26
LE Code (S=2)	1.048	1.880	0.56	55.74	2.54	0.95
LE Code (S=8)	3.075	3.750	0.82	82.00	0.86	0.33



**Remark:**

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 \* log(1/ Duty cycle).

The test plot as follows

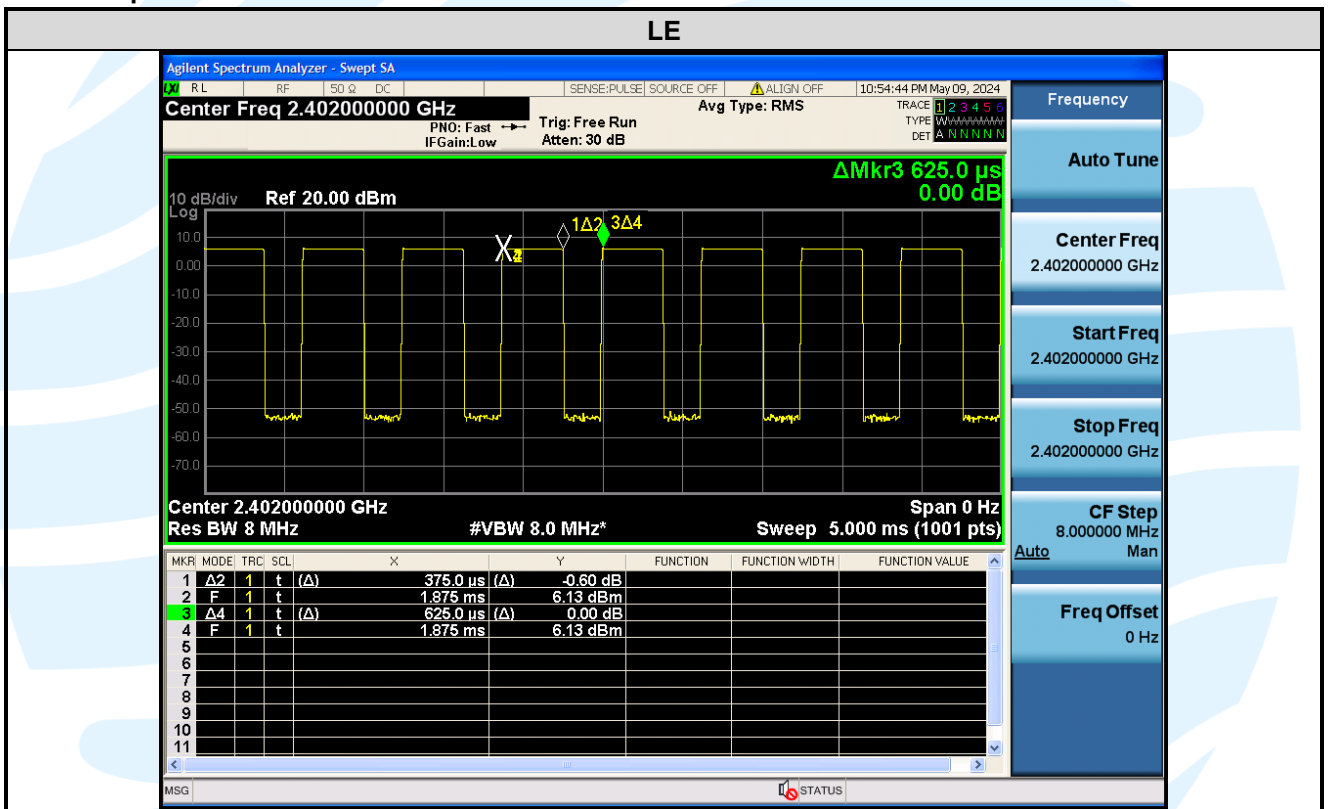



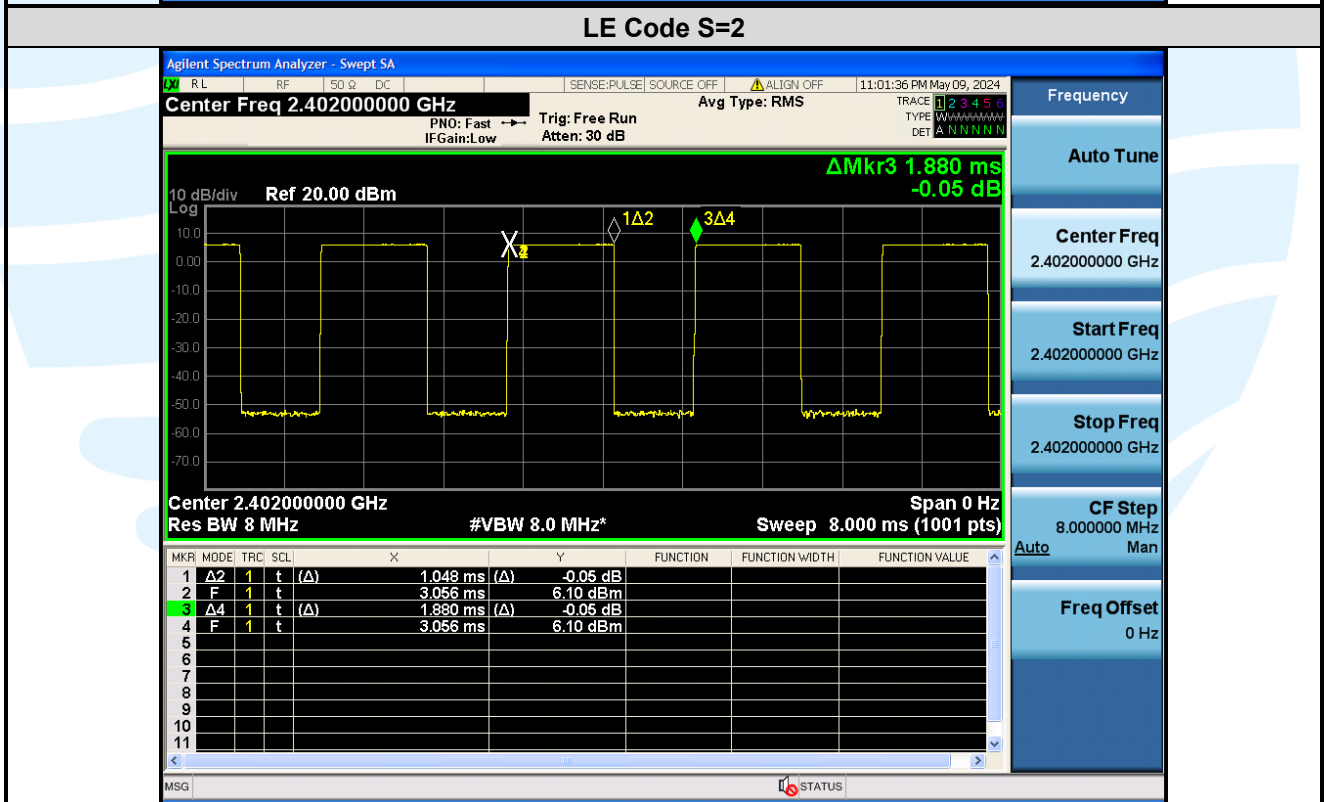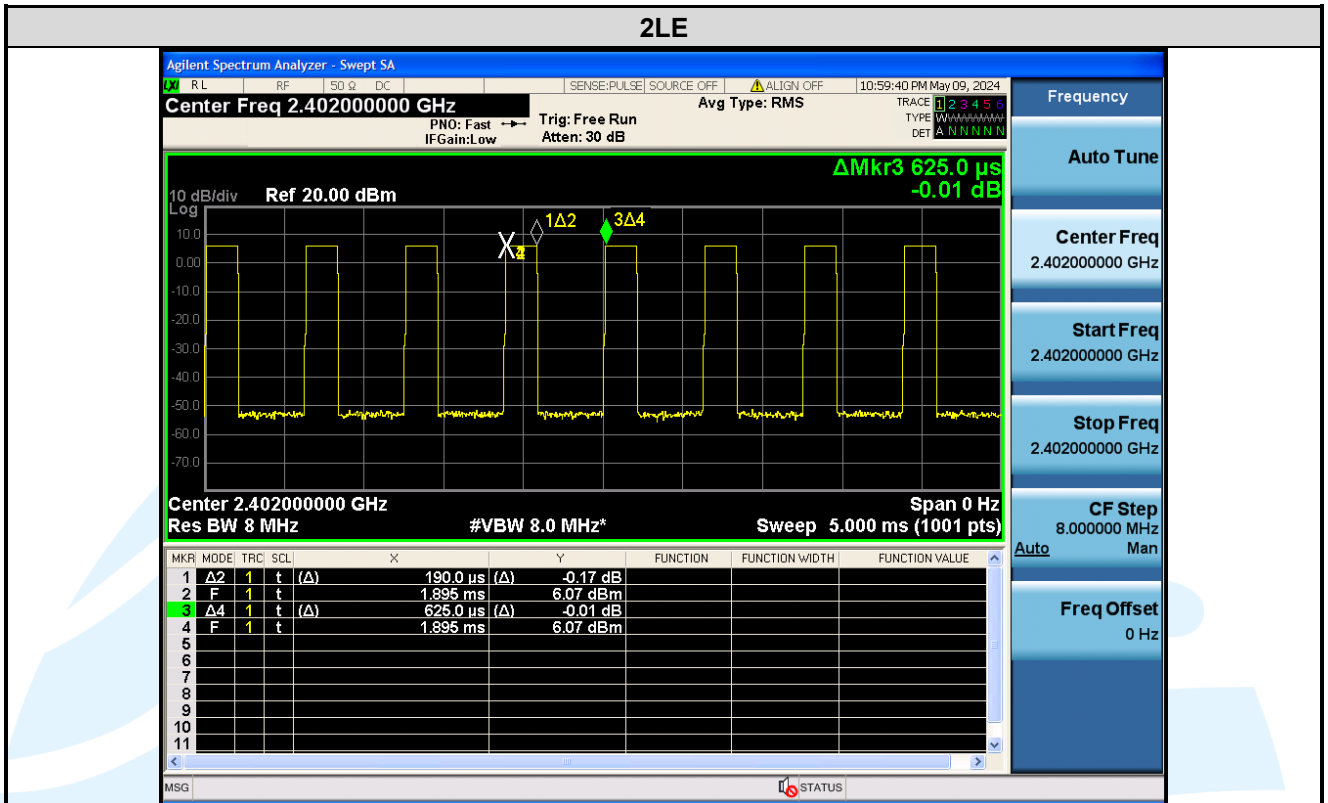

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

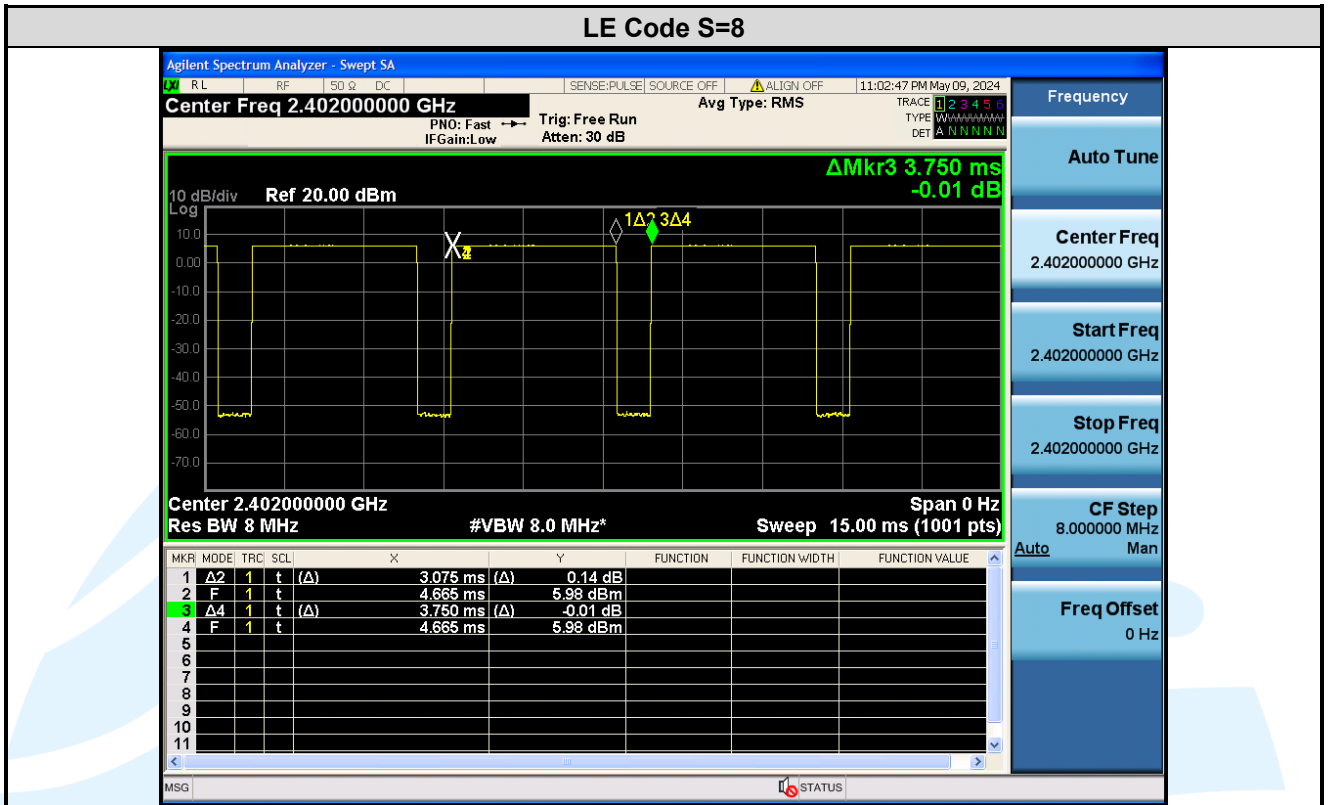

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
6	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

### 5.2 ANTENNA REQUIREMENT

Standard Requirement
<p><b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(b) (4) requirement:</b> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p><b>RSS-Gen Issue 5, Section 6.8 requirement:</b> According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.</p>
<p><b>EUT Antenna:</b> Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 3.5dBi.</p>

### 5.3 CONDUCTED PEAK OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)  
 RSS-247 Issue 3, Section 5.4(d)

**Test Method:** ANSI C63.10-2013 Clause 11.9.1.3

**Limit:** **FCC 47 CFR Part 15 Subpart C**  
 For DTSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W.  
**RSS-247 Issue 3**  
 For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.4.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

Mode	Frequency	Max. Peak Power		Peak Power Limit	ISED e.i.r.p.	ISED e.i.r.p. Limit	Result
	(MHz)	(dBm)	(dBm)	(W)	(dBm)	(dBm)	
LE	2402	7.38	30	0.00547	10.88	36.02	Pass
	2440	7.61	30	0.00577	11.11	36.02	Pass
	2480	7.85	30	0.00610	11.35	36.02	Pass
2LE	2402	7.32	30	0.00540	10.82	36.02	Pass
	2440	7.57	30	0.00571	11.07	36.02	Pass
	2480	7.80	30	0.00603	11.30	36.02	Pass
LE Code (S=2)	2402	7.41	30	0.00551	10.91	36.02	Pass
	2440	7.64	30	0.00581	11.14	36.02	Pass
	2480	<b>7.88</b>	30	0.00614	<b>11.38</b>	36.02	Pass
LE Code (S=8)	2402	7.42	30	0.00552	10.92	36.02	Pass
	2440	7.63	30	0.00579	11.13	36.02	Pass
	2480	7.87	30	0.00612	11.37	36.02	Pass

Note:

1. The antenna gain of 3.5 dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.
2. The maximum EIRP is calculated from max output power and antenna gain, the antenna gain provided by the customer, and the customer takes all the responsibilities for the accuracy of antenna gain.

### 5.46 DB BANDWIDTH & OCCUPIED BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)  
 RSS-247 Issue 3, Section 5.2(a)  
 RSS-Gen Issue 5, Section 6.7

**Test Method:** ANSI C63.10-2013 Clause 11.8.1  
 RSS-Gen Issue 5, Section 6.7

**Limit:** For digital transmission systems, the minimum 6 dB bandwidth shall be 500 kHz.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.  
 Use the following spectrum analyzer settings:

**6dB Bandwidth**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Occupied Bandwidth**

- a) Set RBW = 1% to 5% of the occupied bandwidth
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.4.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** **Please refer to Appendix A**

## 5.5 POWER SPECTRAL DENSITY

<b>Test Requirement:</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (e) RSS-247 Issue 3, Section 5.2(b)
<b>Test Method:</b>	ANSI C63.10-2013 Clause 11.10.2
<b>Limit:</b>	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
<b>Test Procedure:</b>	<p>Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.</p> <p>Use the following spectrum analyzer settings:</p> <ol style="list-style-type: none"> <li>a) Set analyzer center frequency to DTS channel center frequency.</li> <li>b) Set the span to 1.5 times the DTS bandwidth.</li> <li>c) Set the RBW to: <math>3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}</math>.</li> <li>d) Set the VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>e) Detector = peak.</li> <li>f) Sweep time = auto couple.</li> <li>g) Trace mode = max hold.</li> <li>h) Allow trace to fully stabilize.</li> <li>i) Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ol> <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p>
<b>Test Setup:</b>	Refer to section 4.4.3 for details.
<b>Instruments Used:</b>	Refer to section 3 for details
<b>Test Mode:</b>	Link mode
<b>Test Results:</b>	<b>Please refer to Appendix A</b>

## 5.6 CONDUCTED OUT OF BAND EMISSION

<b>Test Requirement:</b>	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 3, Section 5.5
<b>Test Method:</b>	ANSI C63.10-2013 Clause 11.11
<b>Limit:</b>	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
<b>Test Procedure:</b>	<p>Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.</p> <p>Use the following spectrum analyzer settings:</p> <p><b>Step 1: Reference level measurement</b></p> <ol style="list-style-type: none"> <li>a) Set instrument center frequency to DTS channel center frequency.</li> <li>b) Set the span to <math>\geq 1.5</math> times the DTS bandwidth.</li> <li>c) Set the RBW = 100 kHz.</li> <li>d) Set the VBW <math>\geq 3 \times</math> RBW.</li> <li>e) Detector = peak.</li> <li>f) Sweep time = auto couple.</li> <li>g) Trace mode = max hold.</li> <li>h) Allow trace to fully stabilize.</li> <li>i) Use the peak marker function to determine the maximum PSD level.</li> </ol> <p>Note that the channel found to contain the maximum PSD level can be used to establish the reference level.</p> <p><b>Step 2: Emission level measurement</b></p> <ol style="list-style-type: none"> <li>a) Set RBW = 100 kHz.</li> <li>b) Set VBW <math>\geq 300</math> kHz.</li> <li>c) Detector = peak.</li> <li>d) Sweep = auto couple.</li> <li>e) Trace Mode = max hold.</li> <li>f) Allow trace to fully stabilize.</li> <li>g) Use the peak marker function to determine the maximum amplitude level.</li> </ol> <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p>
<b>Test Setup:</b>	Refer to section 4.4.3 for details.
<b>Instruments Used:</b>	Refer to section 3 for details
<b>Test Mode:</b>	Link mode
<b>Test Results:</b>	<b>Please refer to Appendix A</b>



### 5.7 RADIATED SPURIOUS EMISSIONS

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.205/15.209  
RSS-Gen Issue 5, Section 6.13/8.9/8.10

**Test Method:** ANSI C63.10-2013 Clause 11.11 & Clause 11.12

**Receiver Setup:**

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

**Limits:**

**Spurious Emissions**

Frequency	Field strength (microvolt/meter)	Limit (dBµV/m )	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

**Remark:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

**Test Setup:** Refer to section 4.4.1 for details.

**Test Procedures:**

1. From 30 MHz to 1GHz test procedure as below:

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

2. Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1



- 2) Test the EUT in the lowest channel ,middle channel, the Highest channel
- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Y axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**The measurement data as follows:**

**Radiated Emission Test Data (9 KHz ~ 30 MHz):**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value need not be reported.

**Radiated Emission Test Data (Above 30 MHz):Please refer to Appendix A**

**Remark:**

- 1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
- 2. Result = Reading + Correct Factor.
- 3. Margin = Limit - Result
- 4. For Radiated Emission above 18GHz, there was not any unwanted emission detected.
- 5. The testing of Radiated Emissions was performed in Dongguan DN Testing Co., Ltd.

### 5.8 BAND EDGE MEASUREMENTS (RADIATED)

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.205/15.209  
RSS-247 Issue 3, Section 5.5

**Test Method:** ANSI C63.10-2013 Clause 11.13

**Limits:**

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dBµV/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

**Test Setup:** Refer to section 4.4.1 for details.

**Test Procedures:**

Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).

1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

**Equipment Used:** Refer to section 3 for details.

**Test Results:** Please refer to Appendix A

**Remark:**

1. The testing of Band Edge Measurements (Radiated) was performed in Dongguan DN Testing Co., Ltd.

### 5.9 CONDUCTED EMISSION

**Test Requirement:** 47 CFR Part 15C Section 15.207  
 RSS-Gen Issue 5, Section 8.8  
**Test Method:** ANSI C63.10-2013 Section 6.2

**Limits:**

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

**Remark:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

**Test Setup:** Refer to section 4.4.2 for details.

**Test Procedures:**


Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

The worst measurement data as follows:  
 Quasi Peak and Average:  
 Mode: BT Link

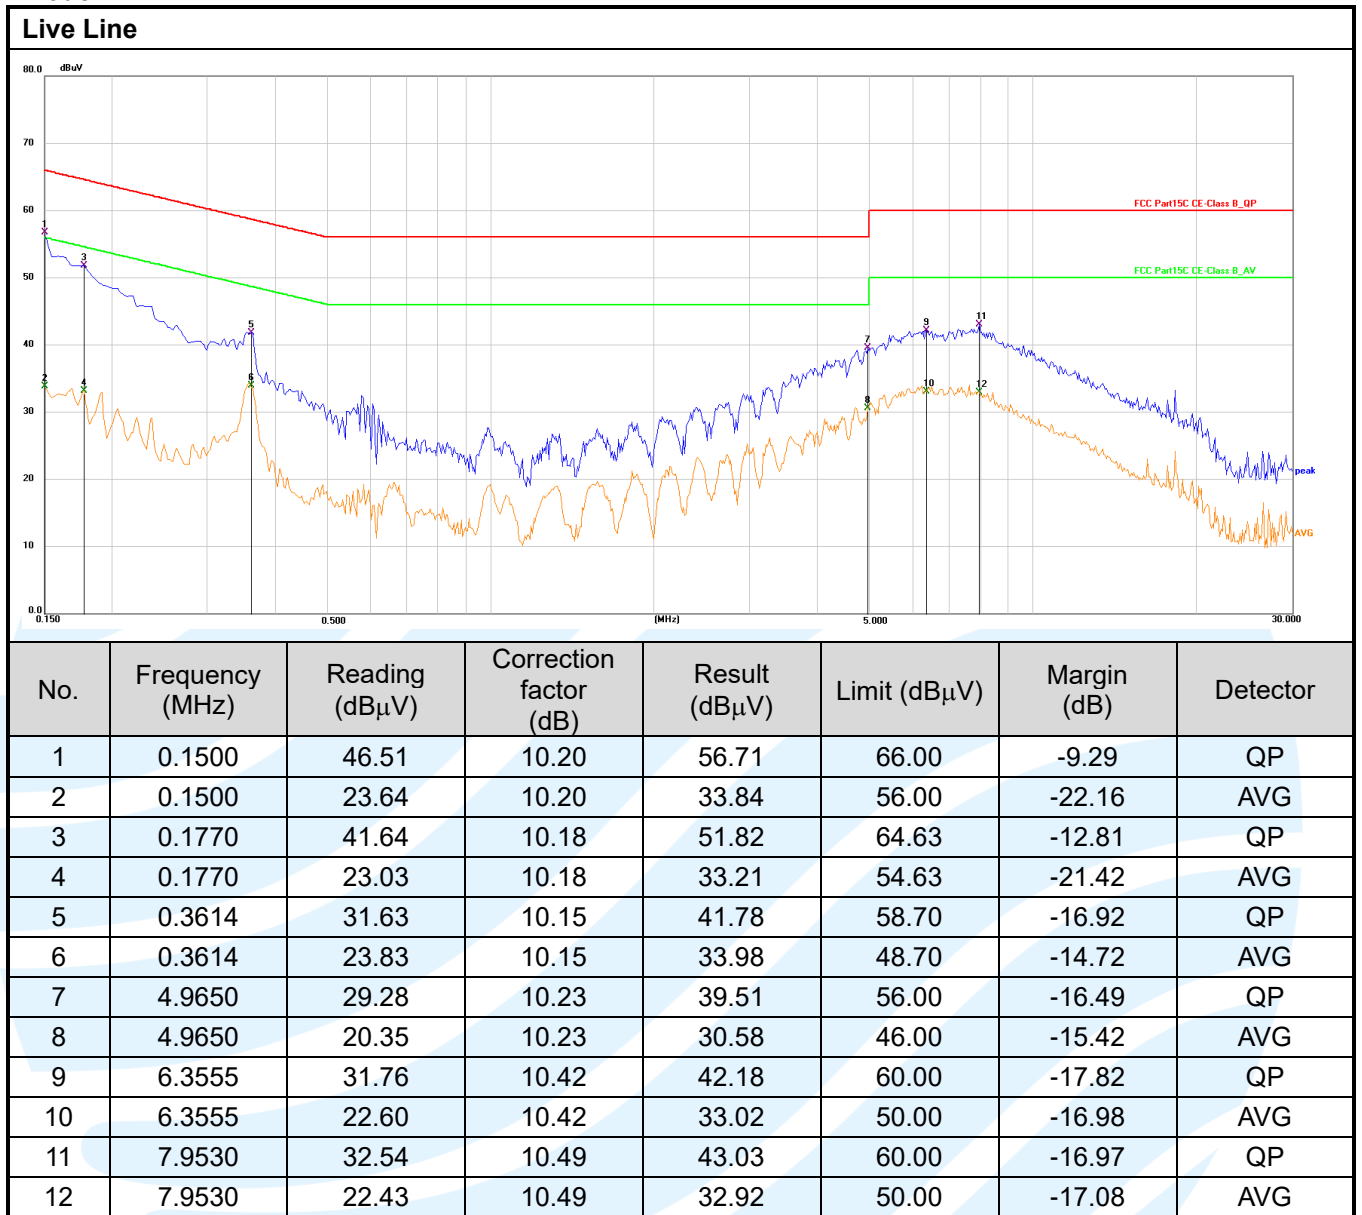

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

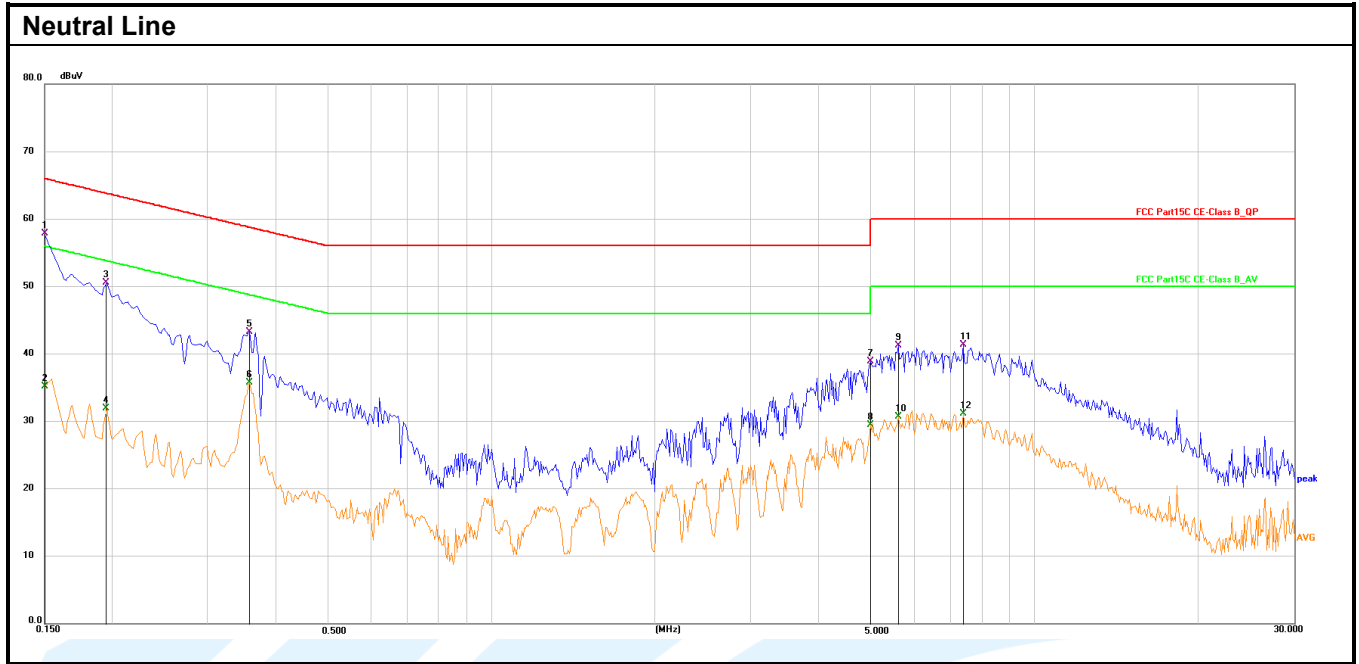

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.1500	47.66	10.19	57.85	66.00	-8.15	QP
2	0.1500	24.97	10.19	35.16	56.00	-20.84	AVG
3	0.1949	40.49	10.06	50.55	63.83	-13.28	QP
4	0.1949	21.85	10.06	31.91	53.83	-21.92	AVG
5	0.3570	33.08	10.15	43.23	58.80	-15.57	QP
6	0.3570	25.59	10.15	35.74	48.80	-13.06	AVG
7	4.9920	28.59	10.28	38.87	56.00	-17.13	QP
8	4.9920	19.16	10.28	29.44	46.00	-16.56	AVG
9	5.6174	30.98	10.28	41.26	60.00	-18.74	QP
10	5.6174	20.41	10.28	30.69	50.00	-19.31	AVG
11	7.3770	31.02	10.31	41.33	60.00	-18.67	QP
12	7.3770	20.81	10.31	31.12	50.00	-18.88	AVG

**Remark:**

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


## APPENDIX A RF TEST DATA

### A.1 99% BANDWIDTH


Mode	Channel	99% BW (MHz)
LE	0	1.0320
LE	19	1.0432
LE	39	1.0378
2LE	0	2.0392
2LE	19	2.0432
2LE	39	2.0401
LE Coded (S=2)	0	1.0117
LE Coded (S=2)	19	1.0393
LE Coded (S=2)	39	1.0243
LE Coded (S=8)	0	1.0480
LE Coded (S=8)	19	1.0610
LE Coded (S=8)	39	1.0511

### Test Graphs




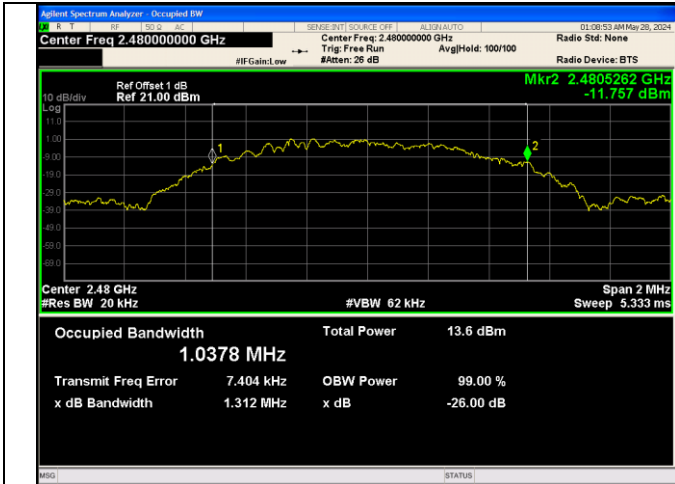


LE\_Channel 39

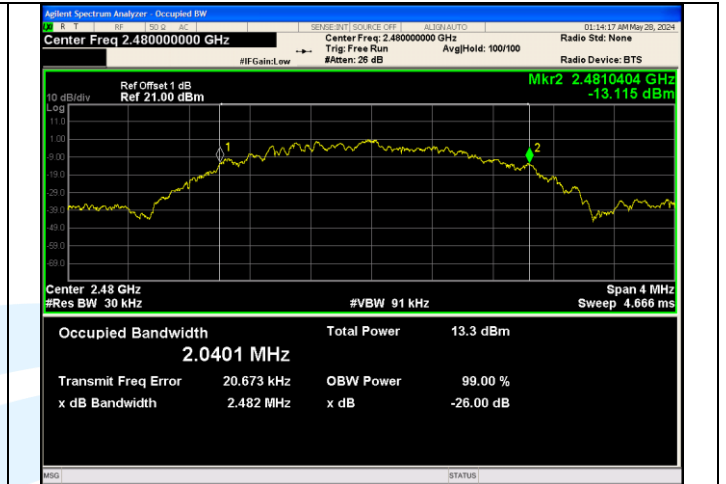

2LE\_Channel 39

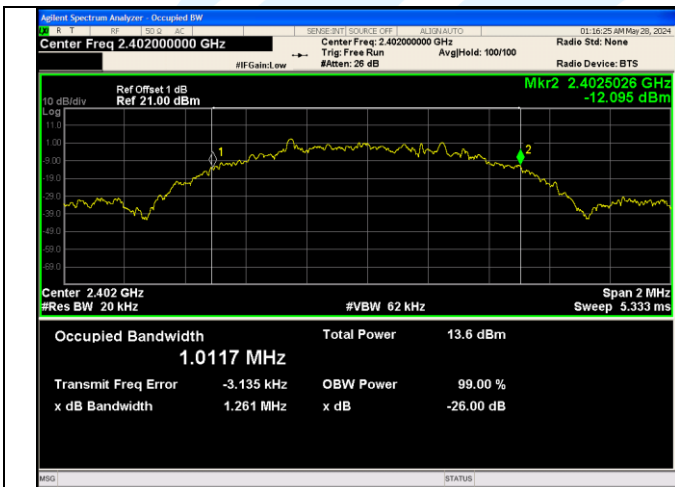


LE Coded (S=2) Channel 0

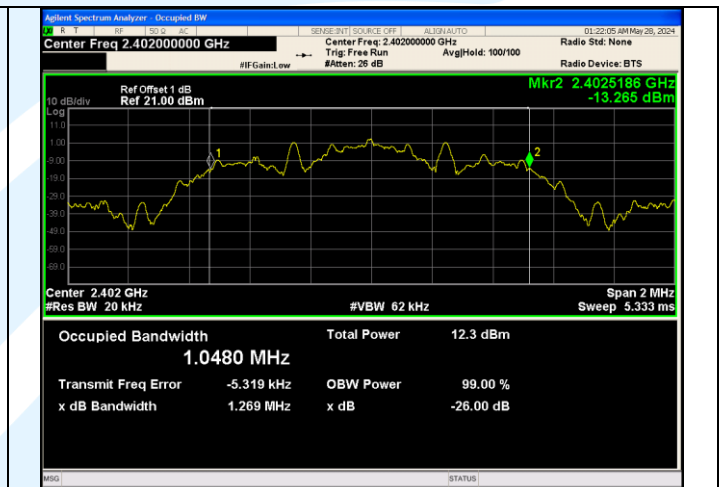


LE Coded (S=8) Channel 0




LE Coded (S=2) Channel 19

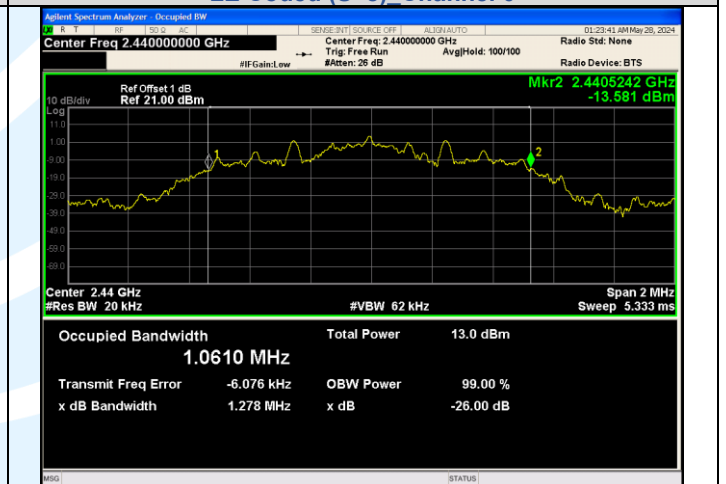

LE Coded (S=8) Channel 19

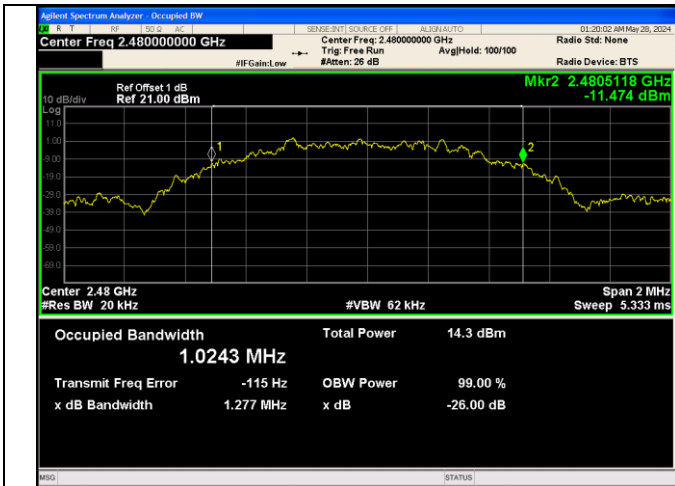

LE Coded (S=2)\_Channel 39

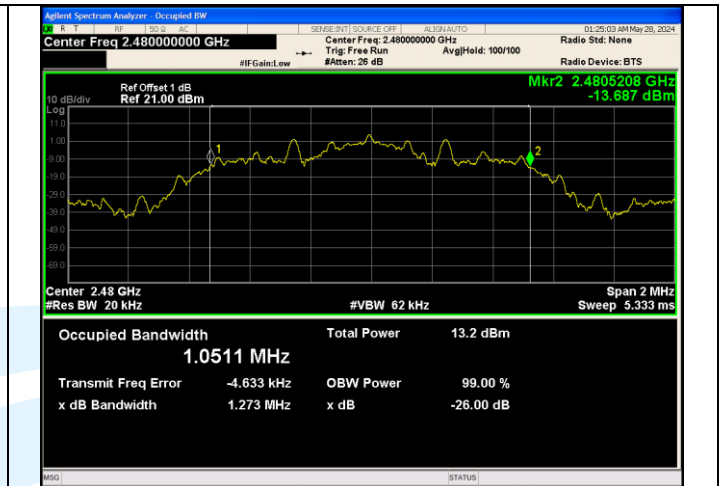


LE Coded (S=8)\_Channel 39

## A.2 6DB BANDWIDTH


### Test Result

Mode	Channel	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
LE	0	2402	0.6966	0.5	PASS
	19	2440	0.7292		PASS
	39	2480	0.7125		PASS
2LE	0	2402	1.171		PASS
	19	2440	1.170		PASS
	39	2480	1.164		PASS
LE Coded (S=2)	0	2402	0.6597		PASS
	19	2440	0.6946		PASS
	39	2480	0.7009		PASS
LE Coded (S=8)	0	2402	0.6731		PASS
	19	2440	0.7021		PASS
	39	2480	0.6766		PASS

### Test Graphs

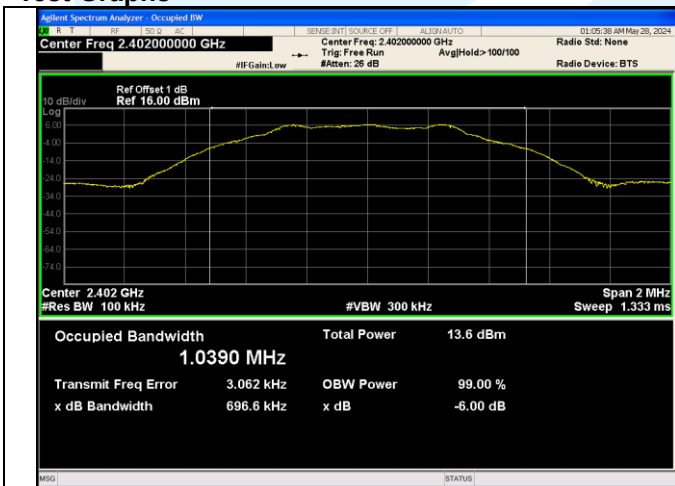


LE\_Channel 0

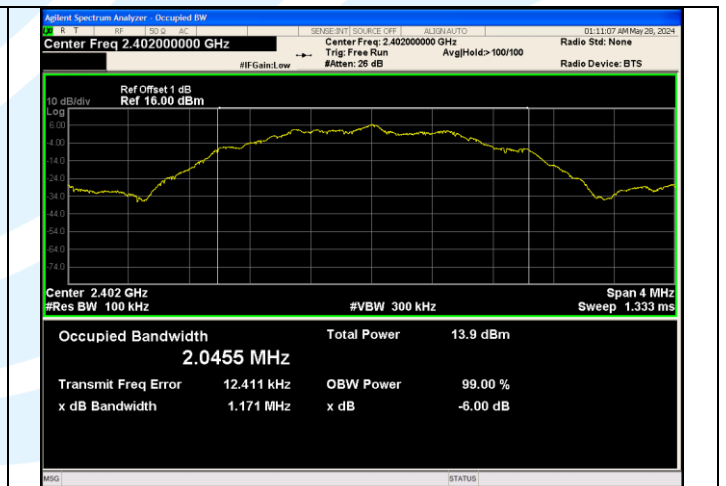


2LE\_Channel 0




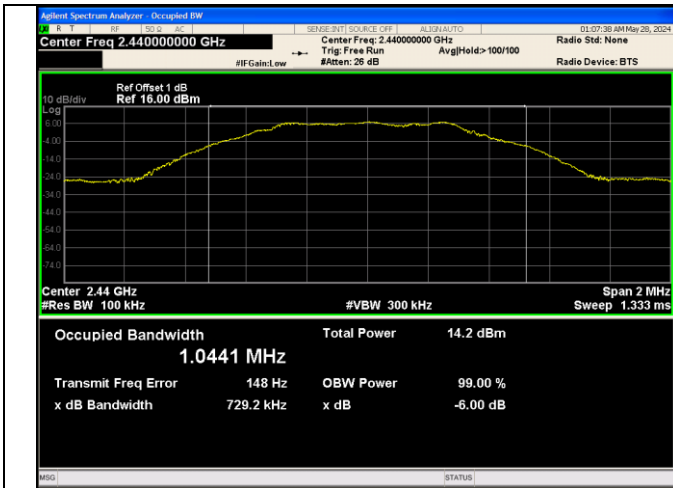


LE Channel 19

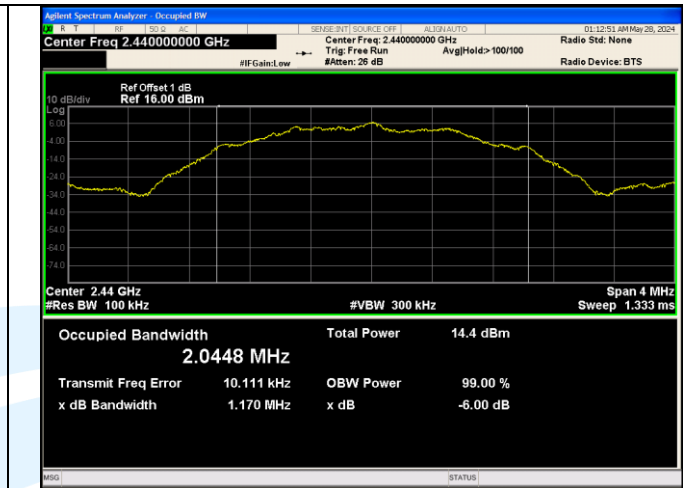


2LE Channel 19

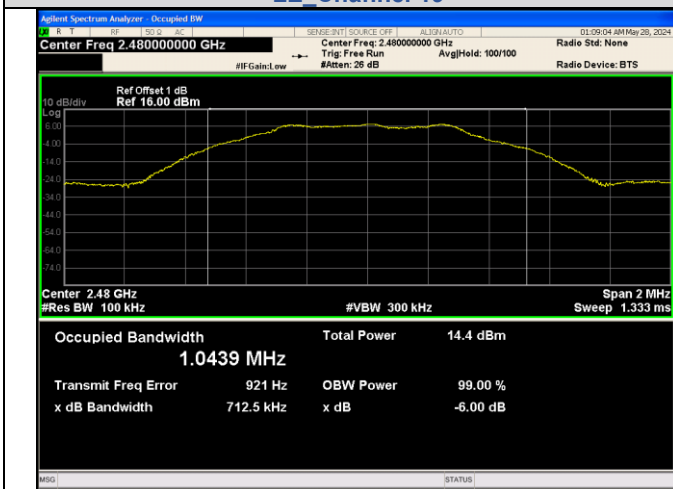


LE Channel 39

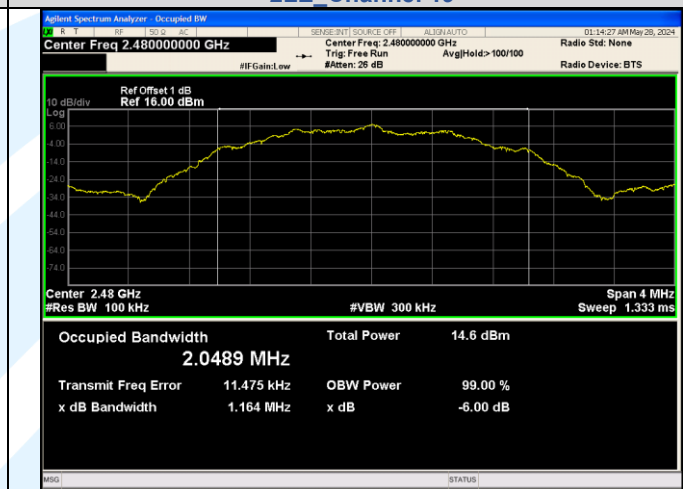


2LE Channel 39

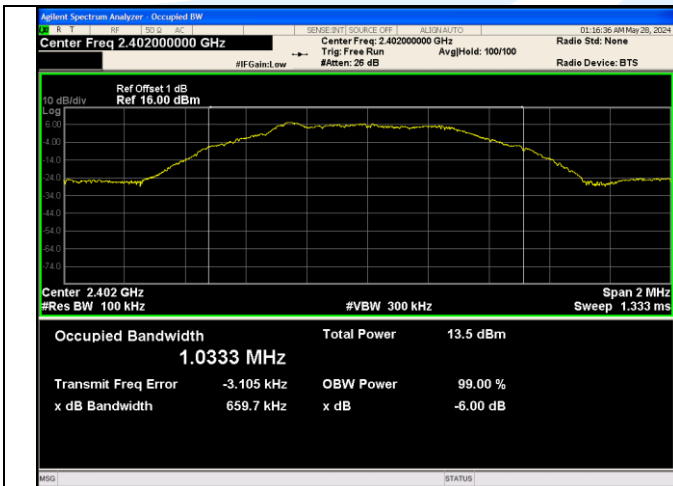


LE Coded (S=2) Channel 0

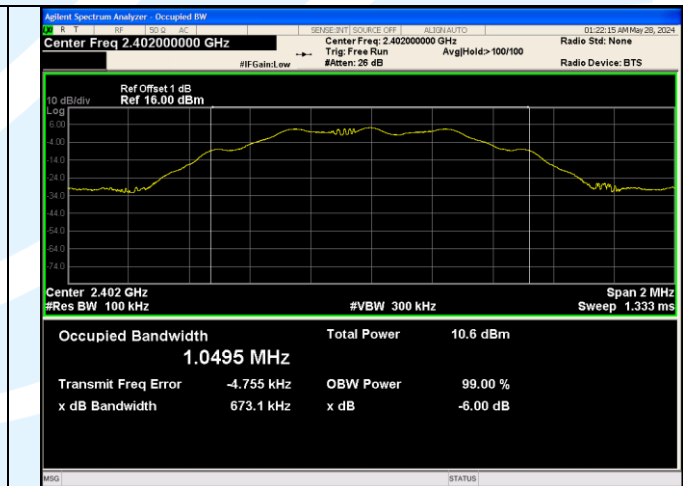


LE Coded (S=8) Channel 0

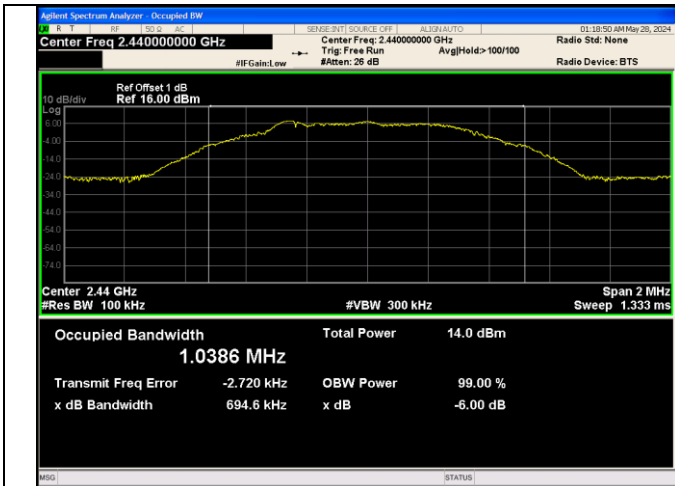


LE Coded (S=2) Channel 19

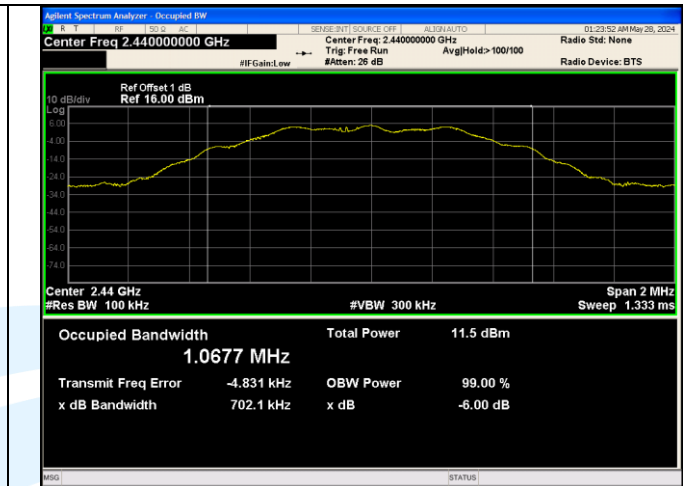

LE Coded (S=8) Channel 19

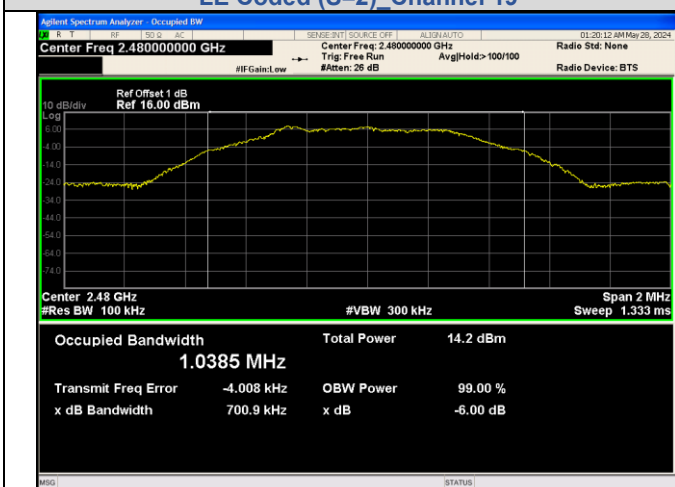

LE Coded (S=2) Channel 39

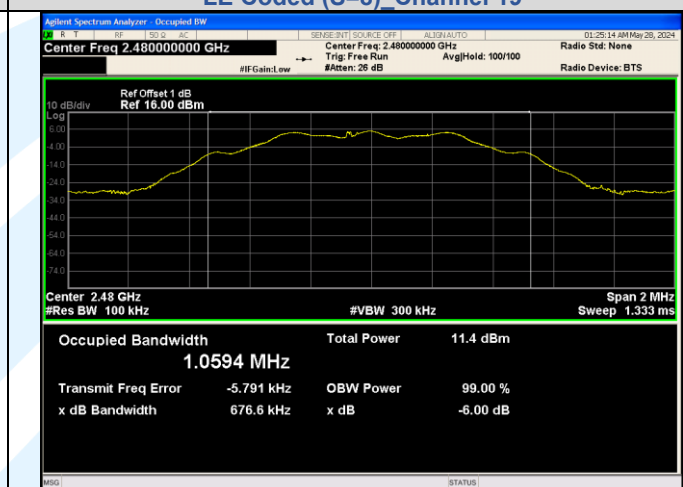


LE Coded (S=8) Channel 39


### A.3 CONDUCTED OUT OF BAND EMISSION


#### Test Result

Mode	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
LE	0	2400.00	-46.851	-13.37	-33.481	PASS
		7205.75	-53.466	-13.37	-40.096	PASS
	19	4879.80	-53.868	-12.95	-40.918	PASS
		39	2483.50	-61.112	-12.63	-48.482
2LE	0	2400.00	-27.593	-13.56	-14.033	PASS
		24986.3	-54.572	-13.56	-41.012	PASS
	19	24137.9	-54.736	-13.22	-41.516	PASS
		39	2483.50	-52.938	-12.84	-40.098
LE Coded (S=2)	0	2400.00	-47.487	-12.69	-34.797	PASS
		7205.75	-51.507	-12.69	-38.817	PASS
	19	24317.1	-54.268	-12.39	-41.878	PASS
		39	2483.50	-60.246	-12.06	-48.186
LE Coded (S=8)	0	2400.00	-47.889	-15.73	-32.159	PASS
		7205.75	-54.086	-15.73	-38.356	PASS
	19	24976.3	-53.941	-14.99	-38.951	PASS
		39	2483.50	-60.678	-14.95	-45.728
39	24094.2	-54.863	-14.95	-39.913	PASS	


#### Test Graphs

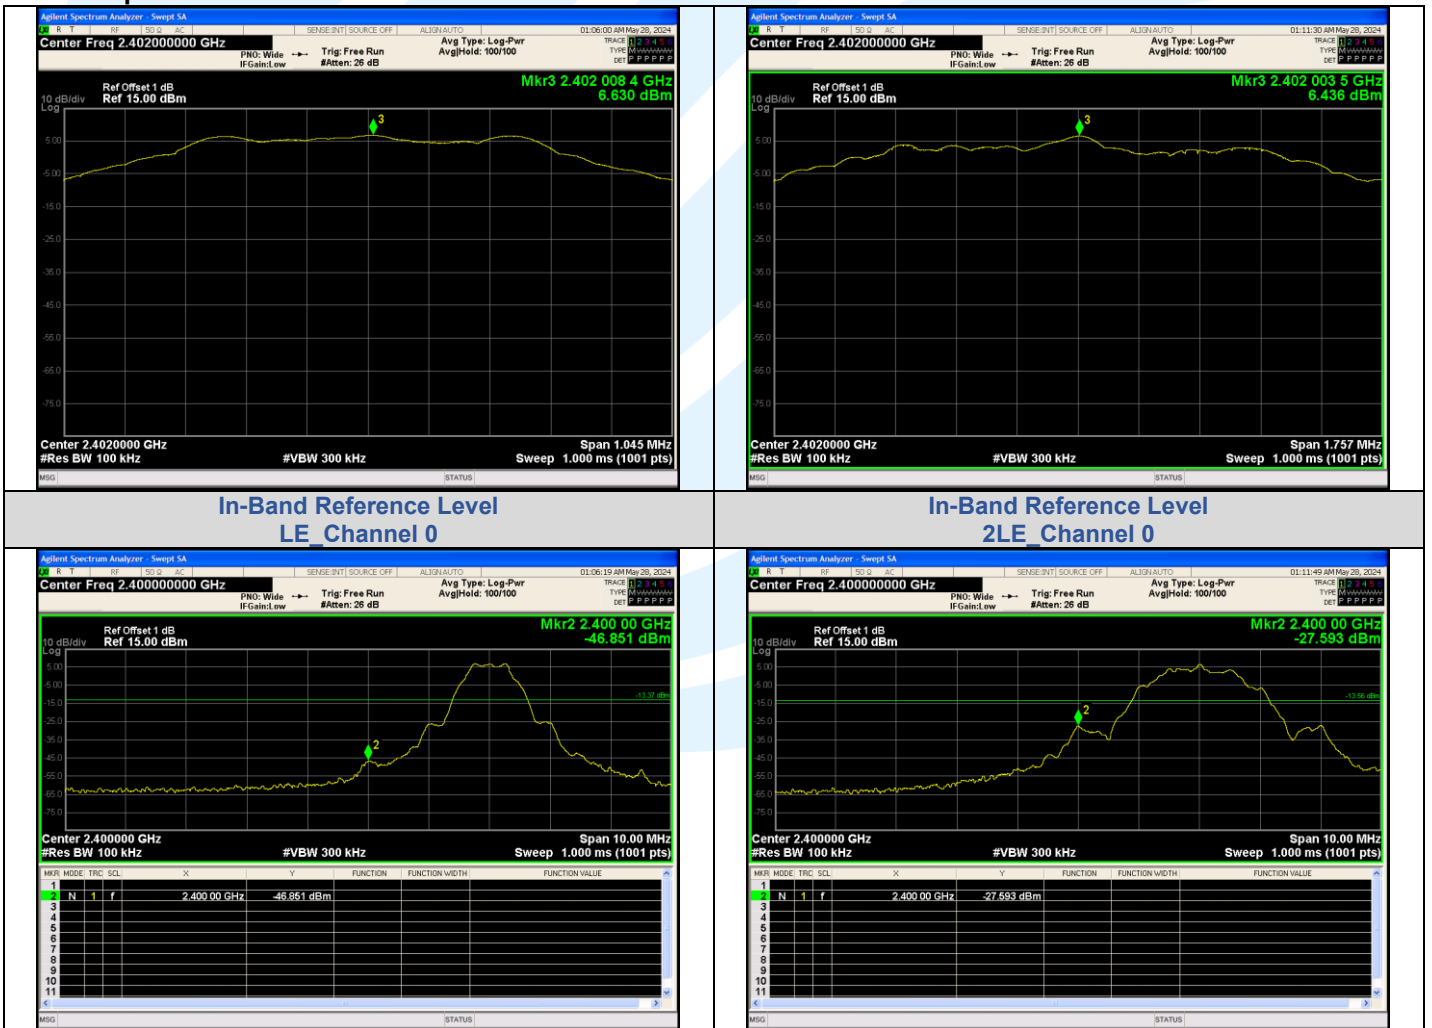

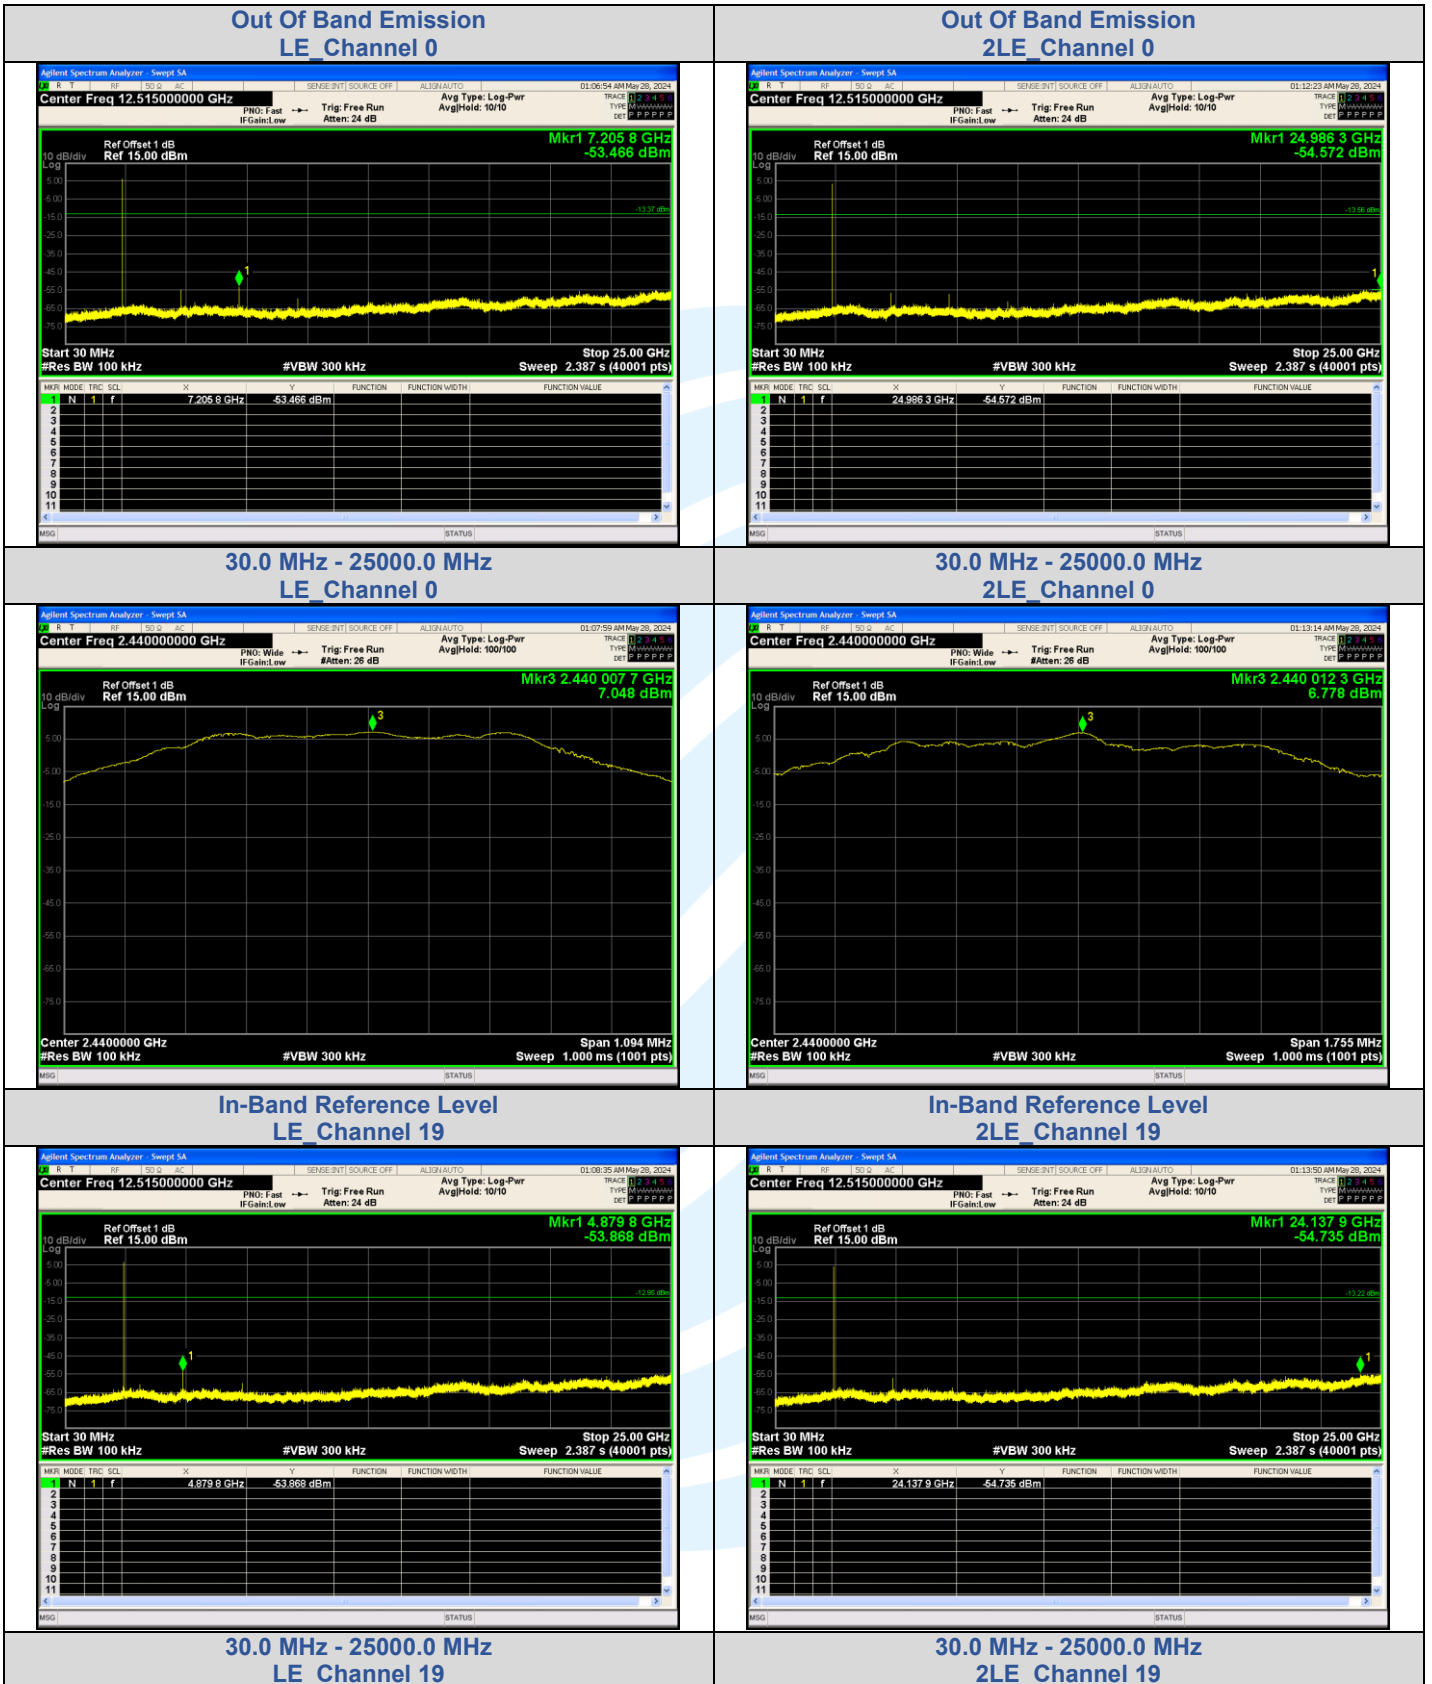


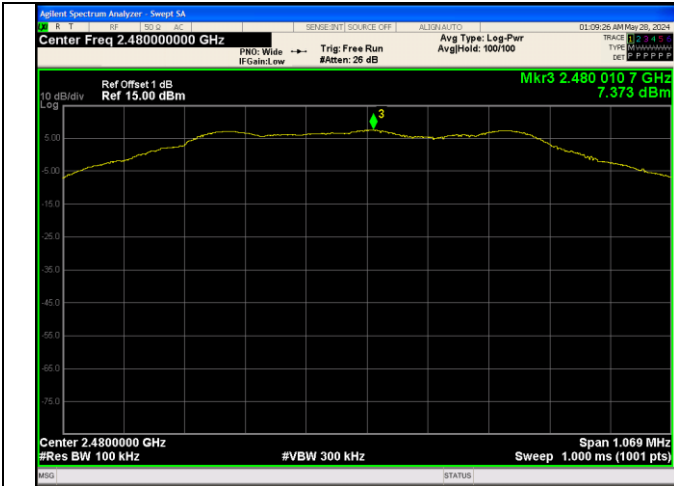

**In-Band Reference Level  
LE Channel 39**

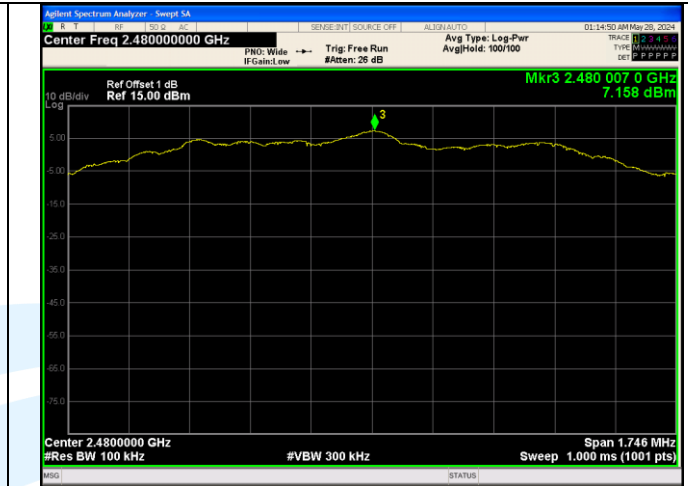


**In-Band Reference Level  
2LE Channel 39**

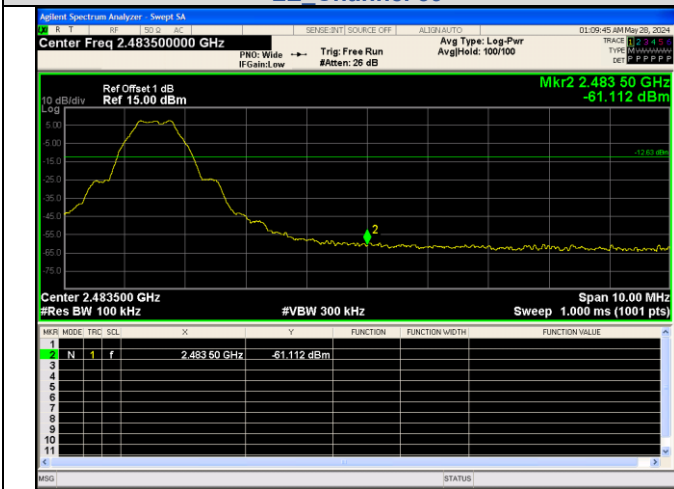


**Out Of Band Emission  
LE Channel 39**




**Out Of Band Emission  
2LE Channel 39**

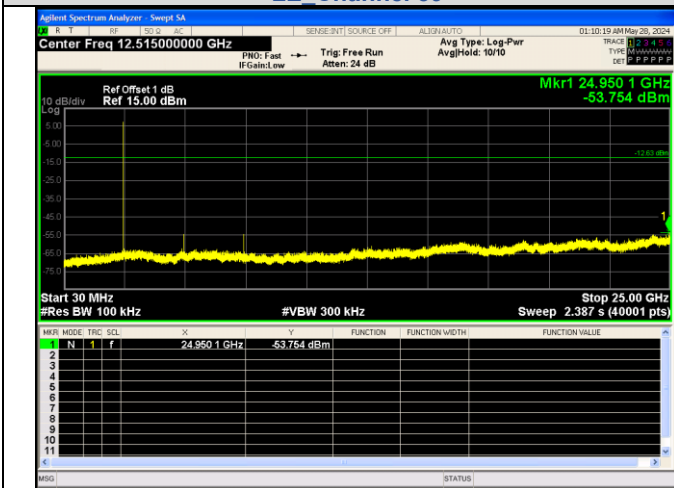


**30.0 MHz - 25000.0 MHz  
LE Channel 39**

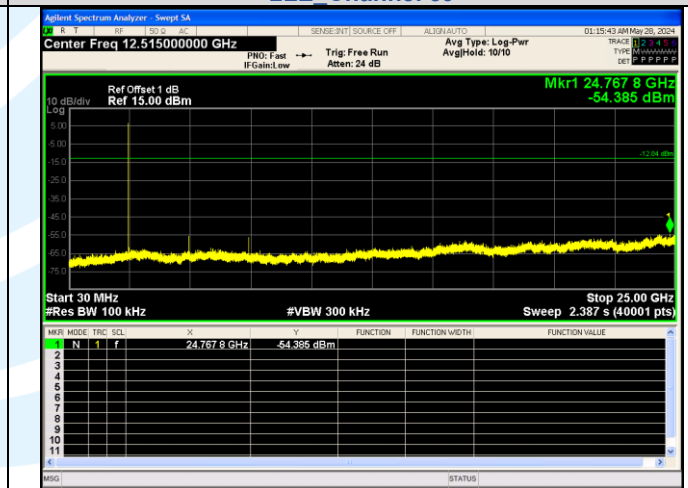


**30.0 MHz - 25000.0 MHz  
2LE Channel 39**

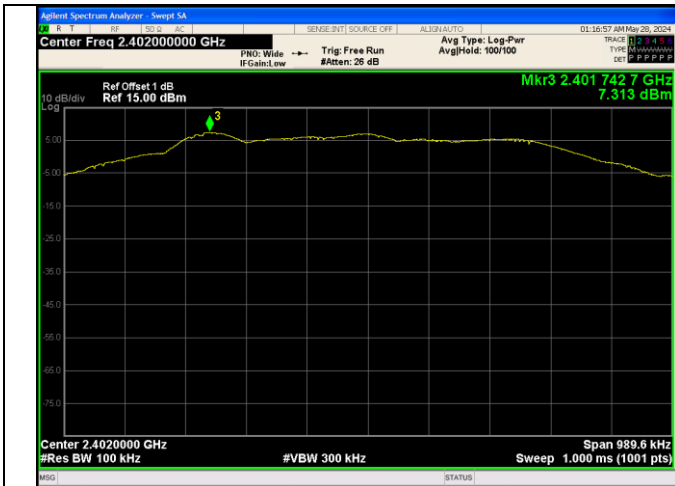


**In-Band Reference Level  
LE Coded (S=2) Channel 0**

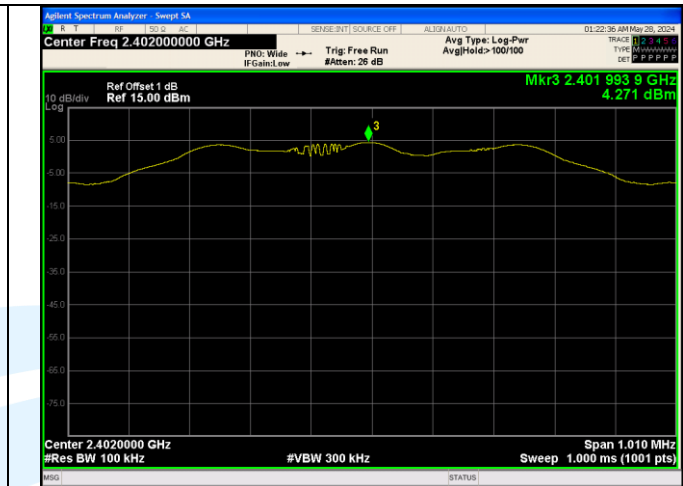


**In-Band Reference Level  
LE Coded (S=8) Channel 0**

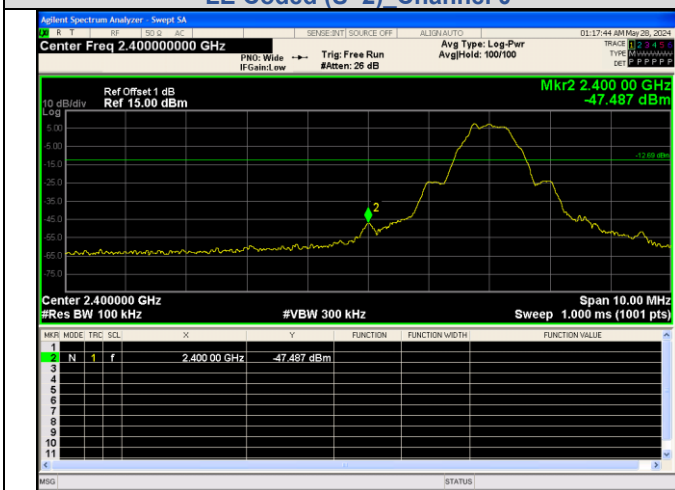


**Out Of Band Emission  
LE Coded (S=2) Channel 0**

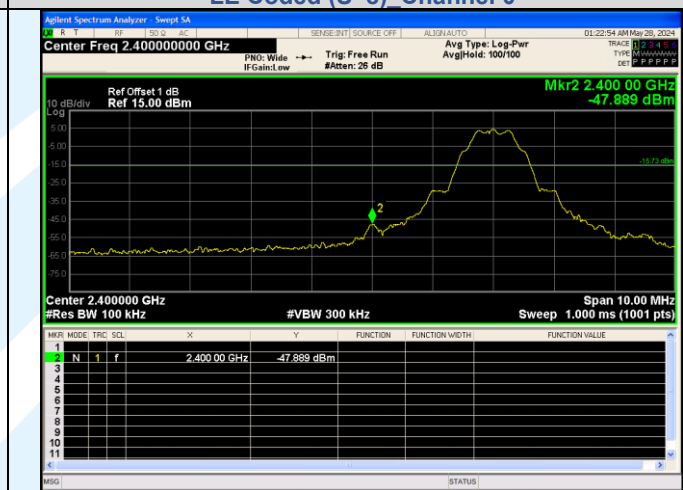


**Out Of Band Emission  
LE Coded (S=8) Channel 0**

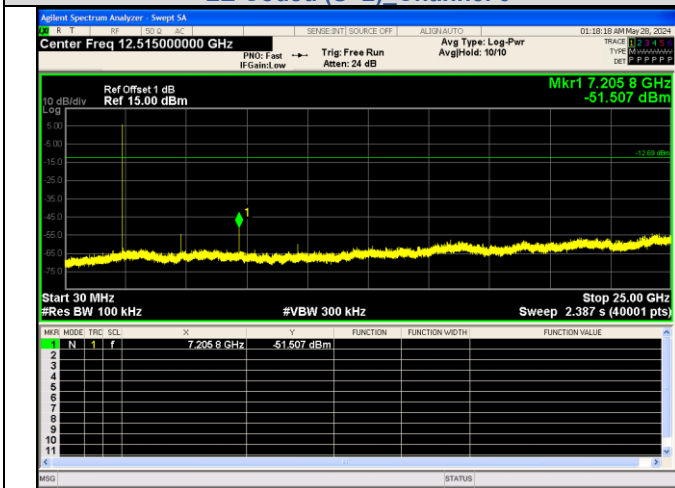


**30.0 MHz - 25000.0 MHz  
LE Coded (S=2) Channel 0**

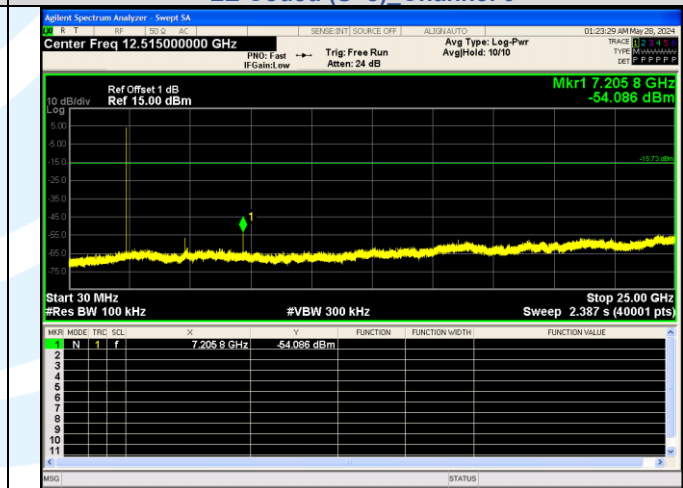


**30.0 MHz - 25000.0 MHz  
LE Coded (S=8) Channel 0**

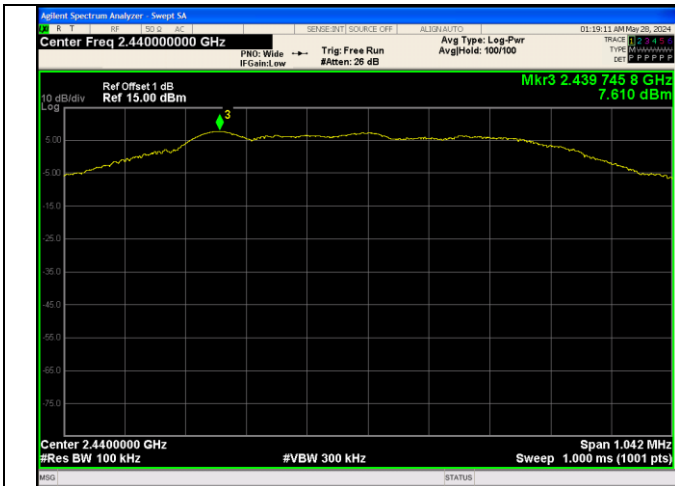


**In-Band Reference Level  
LE Coded (S=2) Channel 19**

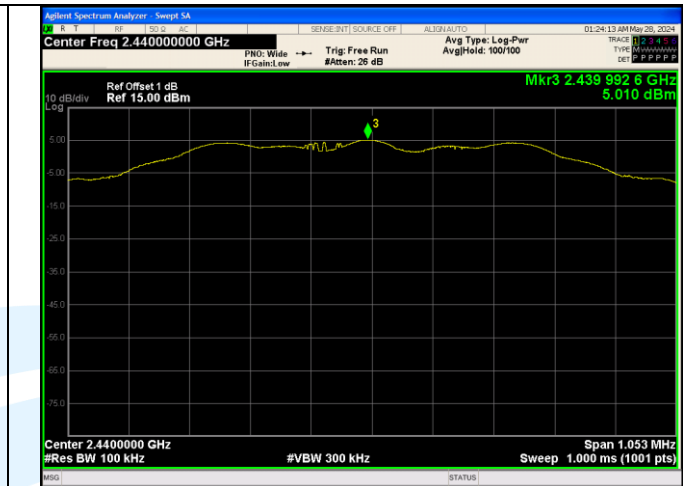


**In-Band Reference Level  
LE Coded (S=8) Channel 19**

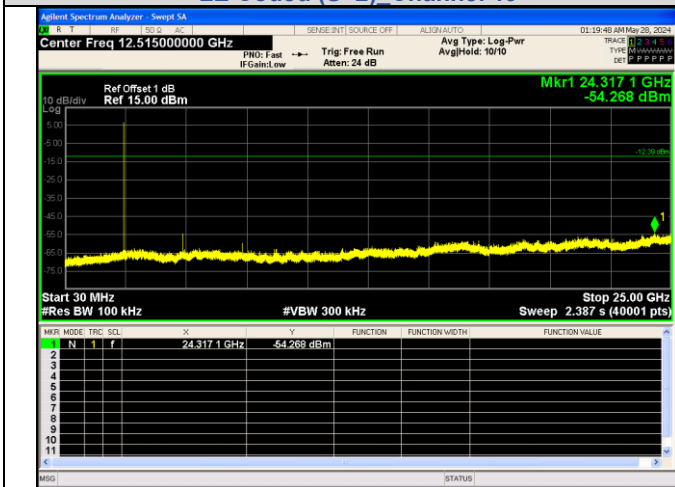


**30.0 MHz - 25000.0 MHz  
LE Coded (S=2) Channel 19**

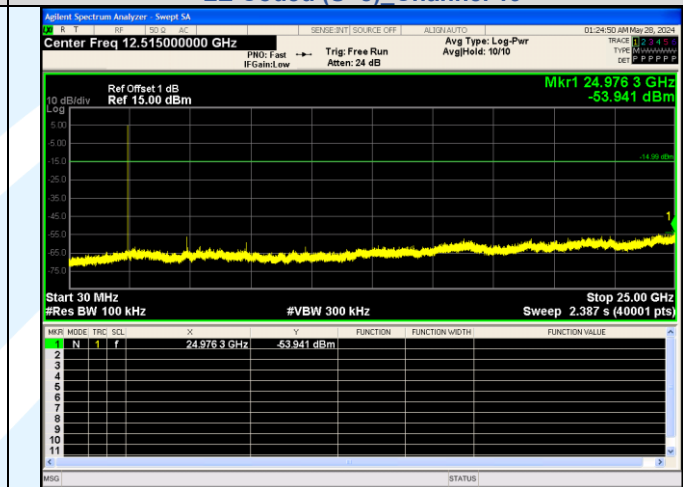

**30.0 MHz - 25000.0 MHz  
LE Coded (S=8) Channel 19**

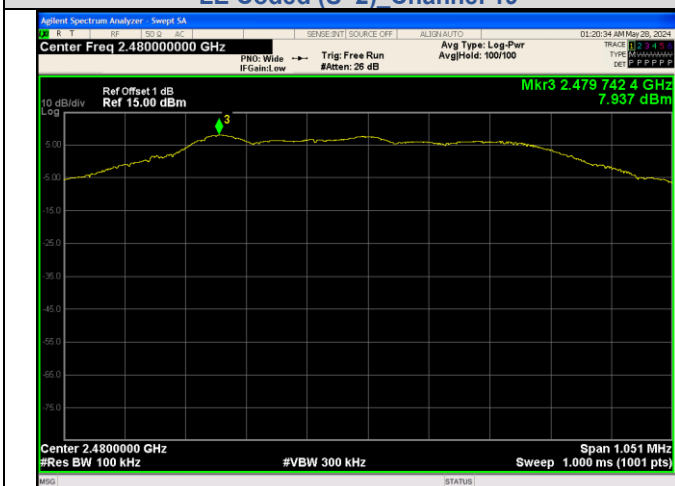

**In-Band Reference Level  
LE Coded (S=2) Channel 39**

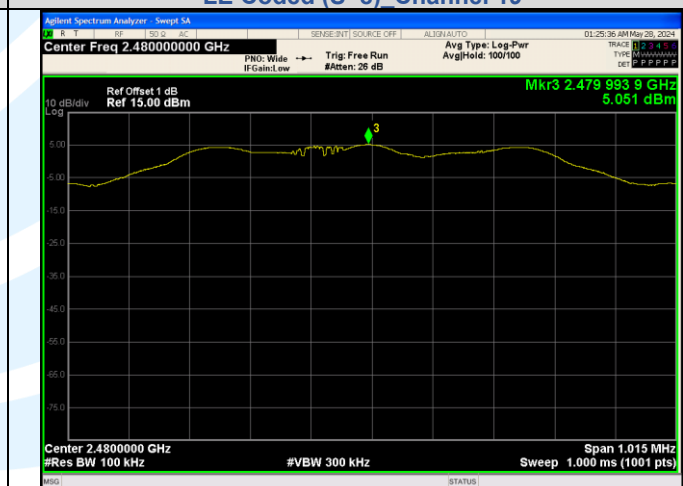

**In-Band Reference Level  
LE Coded (S=8) Channel 39**