

TEST REPORT

Product Name: HD Intercom & Facility Control Station
Trade Mark: GRANDSTREAM
Model No. GSC3575
Add. Model No.: GSC3574
Report Number: 2401279067RFC-3
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: YZZGSC3575
Test Result: PASS
Date of Issue: May 11, 2024

Prepared for:


Grandstream Networks, Inc.
126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China**
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by: David Chen
David Chen
Senior Project Engineer

Reviewed by: Robben chen
Robben Chen
Assistant Manager

Approved by: 
Billy Li
Technical Director

Date: May 11, 2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Version

| Version No. | Date | Description |
|-------------|--------------|-------------|
| V1.0 | May 11, 2024 | Original |

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

CONTENTS

| | |
|--|-----------|
| 1. GENERAL INFORMATION | 4 |
| 1.1 CLIENT INFORMATION | 4 |
| 1.2 EUT INFORMATION | 4 |
| 1.2.1 GENERAL DESCRIPTION OF EUT | 4 |
| 1.2.2 DESCRIPTION OF ACCESSORIES | 4 |
| 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD | 5 |
| 1.4 OTHER INFORMATION | 5 |
| 1.5 DESCRIPTION OF SUPPORT UNITS | 6 |
| 1.6 TEST LOCATION | 6 |
| 1.7 TEST FACILITY | 6 |
| 1.8 DEVIATION FROM STANDARDS | 6 |
| 1.9 ABNORMALITIES FROM STANDARD CONDITIONS | 6 |
| 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 7 |
| 1.11 MEASUREMENT UNCERTAINTY | 7 |
| 2. TEST SUMMARY | 8 |
| 3. EQUIPMENT LIST | 9 |
| 4. TEST CONFIGURATION | 10 |
| 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING | 10 |
| 4.1.1 NORMAL OR EXTREME TEST CONDITIONS | 10 |
| 4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE | 10 |
| 4.2 TEST CHANNELS | 10 |
| 4.3 EUT TEST STATUS | 11 |
| 4.4 PRE-SCAN | 11 |
| 4.5 TEST SETUP | 12 |
| 4.5.1 FOR RADIATED EMISSIONS TEST SETUP | 12 |
| 4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP | 13 |
| 4.5.3 FOR CONDUCTED RF TEST SETUP | 14 |
| 4.6 SYSTEM TEST CONFIGURATION | 14 |
| 4.7 DUTY CYCLE | 15 |
| 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION | 19 |
| 5.1 REFERENCE DOCUMENTS FOR TESTING | 19 |
| 5.2 ANTENNA REQUIREMENT | 19 |
| 5.3 CONDUCTED OUTPUT POWER | 20 |
| 5.4 6 DB BANDWIDTH | 21 |
| 5.5 POWER SPECTRAL DENSITY | 22 |
| 5.6 CONDUCTED OUT OF BAND EMISSION | 23 |
| 5.7 RADIATED SPURIOUS EMISSIONS | 24 |
| 5.8 BAND EDGE MEASUREMENTS (RADIATED) | 33 |
| 5.9 CONDUCTED EMISSION | 46 |
| APPENDIX A RF TEST DATA | 49 |
| A.1 99% BANDWIDTH | 49 |
| A.2 6DB BANDWIDTH | 53 |
| A.3 CONDUCTED OUT OF BAND EMISSION | 57 |
| A.4 POWER SPECTRAL DENSITY | 66 |
| APPENDIX 1 PHOTOS OF TEST SETUP | 70 |
| APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS | 70 |

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

| | |
|---------------------------------|---|
| Applicant: | Grandstream Networks, Inc. |
| Address of Applicant: | 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA |
| Manufacturer: | Grandstream Networks, Inc. |
| Address of Manufacturer: | 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA |

1.2 EUT INFORMATION

1.2.1 General Description of EUT

| | | | |
|---|--|------------------------|----------------------|
| Product Name: | HD Intercom & Facility Control Station | | |
| Model No.: | GSC3575 | | |
| Add. Model No.: | GSC3574 | | |
| Trade Mark: | GRANDSTREAM | | |
| DUT Stage: | Identical Prototype | | |
| EUT Supports Function: (Provided by the customer) | 2.4 GHz ISM Band: | IEEE 802.11b/g/n/ax | |
| | | Bluetooth 5.0 | |
| | U-NII 5 GHz Bands: | 5 150 MHz to 5 250 MHz | IEEE 802.11a/n/ac/ax |
| | | 5 250 MHz to 5 350 MHz | IEEE 802.11a/n/ac/ax |
| | | 5 470 MHz to 5 725 MHz | IEEE 802.11a/n/ac/ax |
| | 5 725 MHz to 5 850 MHz | IEEE 802.11a/n/ac/ax | |
| Sample Received Date: | January 26, 2024 | | |
| Sample Tested Date: | February 27, 2024 to April 17, 2024 | | |
| Remark: | The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description. | | |

1.2.2 Description of Accessories

| Cable | |
|--------------------|----------------------------|
| Connector: | USB Cable |
| Cable Type: | Unshielded without ferrite |
| Length: | 1.0 Meter |

| Earphone | |
|----------|-----------|
| | 1.2 Meter |

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

| | |
|--|--|
| Frequency Band: | 2400 MHz to 2483.5 MHz |
| Frequency Range: | 2412 MHz to 2462 MHz |
| Support Standards: | IEEE 802.11b/g/n-HT20/n-HT40/ax-HE20/ax-HE40 |
| Type of Modulation: | IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11ax:OFDM/ OFDMA ^{Note 1} (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) |
| Data Rate: | IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7 IEEE 802.11n-HT40: Up to MCS7 IEEE 802.11ax-HE20/ HE40: Up to MCS11 |
| Number of Channels: | IEEE 802.11b: 11 IEEE 802.11g: 11 IEEE 802.11n-HT20/ax-HE20: 11 IEEE 802.11n-HT40/ax-HE40: 7 |
| Channel Separation: | 5 MHz |
| Antenna Type: (Provided by the customer) | PIFA Antenna |
| Antenna Gain: (Provided by the customer) | 4.72 dBi |
| Maximum Peak Power: | IEEE 802.11b: 21.01 dBm IEEE 802.11g: 24.53 dBm IEEE 802.11n-HT20: 24.58 dBm IEEE 802.11n-HT40: 24.68 dBm IEEE 802.11ax-HE20: 24.41 dBm IEEE 802.11ax-HE40: 24.77 dBm |
| Normal Test Voltage: | 48 Vdc |
| Note 1: The customer declaration that OFDMA modulation supports only the SU mode. | |

1.4 OTHER INFORMATION

| Operation Frequency Each of Channel | |
|---|---|
| IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20 IEEE 802.11ax-HE20 | $f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$ |
| IEEE 802.11n-HT40 IEEE 802.11ax-HE40 | $f = 2407 + 5k \text{ MHz}, k = 3, \dots, 9$ |
| Note: f is the operating frequency (MHz); k is the operating channel. | |

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

| Description | Manufacturer | Model No. | Serial Number | Supplied by |
|-------------|--------------|---------------|---------------|-------------|
| Notebook | DELL | Latitude 3400 | 16238087894 | UnionTrust |
| Mouse | DELL | MS111 | CN-011D3V-738 | UnionTrust |

2) Support Cable

| Cable No. | Description | Connector | Length | Supplied by |
|-----------|---------------|-----------|----------|-------------|
| 1 | Antenna Cable | SMA | 0.1Meter | UnionTrust |

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China 518109
 Telephone: +86 (0) 755 2823 0888
 Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|--------------------------|
| 1 | Conducted emission 9KHz-150KHz | ±3.8 dB |
| 2 | Conducted emission 150KHz-30MHz | ±3.4 dB |
| 3 | Radiated emission 9KHz-30MHz | ±4.9 dB |
| 4 | Radiated emission 30MHz-1GHz | ±4.7 dB |
| 5 | Radiated emission 1GHz-18GHz | ±5.1 dB |
| 6 | Radiated emission 18GHz-26GHz | ±5.2 dB |
| 7 | Radiated emission 26GHz-40GHz | ±5.2 dB |
| 8 | Radio frequency | ± 6.5 x 10 ⁻⁸ |
| 9 | Occupied Channel Bandwidth | ± 1.86 % |
| 10 | RF output power, conducted | ± 0.68 dB |
| 11 | Power Spectral Density | ± 0.6 dB |
| 12 | Spurious emissions, conducted | ± 2.7 dB |
| 13 | Time | ± 0.19 % |

2. TEST SUMMARY

| FCC 47 CFR Part 15 Subpart C Test Cases | | | |
|---|---|--|--------|
| Test Item | Test Requirement | Test Method | Result |
| Antenna Requirement | FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)(4) | N/A | PASS |
| AC Power Line Conducted Emission | FCC 47 CFR Part 15 Subpart C Section 15.207 | ANSI C63.10-2013 Clause 6.2 | PASS |
| Conducted Peak Output Power | FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3) | ANSI C63.10-2013 Clause 11.9.1.3 | PASS |
| 6dB Bandwidth | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2) | ANSI C63.10-2013 Clause 11.8.1 | PASS |
| Power Spectral Density | FCC 47 CFR Part 15 Subpart C Section 15.247 (e) | ANSI C63.10-2013 Clause 11.10.2 | PASS |
| Conducted Out of Band Emission | FCC 47 CFR Part 15 Subpart C Section 15.247(d) | ANSI C63.10-2013 Clause 11.11 | PASS |
| Radiated Spurious Emissions | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 Clause 11.11 & Clause 11.12 | PASS |
| Band Edge Measurements (Radiated) | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 Clause 11.13 | PASS |
| Note: | | | |
| 1) N/A: In this whole report not applicable. | | | |
| Disclaimer and Explanations: | | | |
| The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification. | | | |

3. EQUIPMENT LIST

| Radiated Emission Test Equipment List | | | | | | |
|---------------------------------------|---|---------------|------------|----------------------------|-------------|---------------|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date | Cal. Due date |
| <input checked="" type="checkbox"/> | 3m SAC | ETS-LINDGREN | 3m | Euroshiedpn-CT001270-1317 | 11-Nov-2023 | 10-Nov-2026 |
| <input checked="" type="checkbox"/> | Receiver | R&S | ESIB26 | 100114 | 27-Oct-2023 | 26-Oct-2024 |
| <input checked="" type="checkbox"/> | Loop Antenna | ETS-LINDGREN | 6502 | 00202525 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | Broadband Antenna | ETS-LINDGREN | 3142E | 00201566 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | 6dB Attenuator | Talent | RA6A5-N-18 | 18103001 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | Preamplifier | HP | 8447F | 2805A02960 | 31-Oct-2023 | 30-Oct-2024 |
| <input checked="" type="checkbox"/> | Band Rejection Filter (2400MHz~2500MHz) | Micro-Tronics | BRM50702 | G590 | 17-Jan-2024 | 16-Jan-2025 |
| <input checked="" type="checkbox"/> | Double-Ridged Waveguide Horn Antenna | ETS-LINDGREN | 3117-PA | 00201541 | 16-Apr-2023 | 15-Apr-2024 |
| | | | | | 01-Apr-2024 | 31-Mar-2025 |
| <input checked="" type="checkbox"/> | Pre-amplifier | ETS-Lindgren | 00118385 | 00201874 | 31-Oct-2023 | 30-Oct-2024 |
| <input checked="" type="checkbox"/> | Double-Ridged Waveguide Horn Antenna | ETS-LINDGREN | 3116C-PA | 00202652 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | Pre-amplifier | ETS-Lindgren | 00118384 | 00202652 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | Multi device Controller | ETS-LINDGREN | 7006-001 | 00160105 | N/A | N/A |
| <input checked="" type="checkbox"/> | Test Software | Audix | e3 | Software Version: 9.160323 | | |

| Conducted Emission Test Equipment List | | | | | | |
|--|---------------|--------------|-----------|---------------------------------|-------------|---------------|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date | Cal. Due date |
| <input checked="" type="checkbox"/> | Receiver | R&S | ESR7 | 1316.3003K07-101181-K3 | 27-Oct-2023 | 26-Oct-2024 |
| <input checked="" type="checkbox"/> | Pulse Limiter | R&S | ESH3-Z2 | 0357.8810.54 | 27-Oct-2023 | 26-Oct-2024 |
| <input checked="" type="checkbox"/> | LISN | R&S | ESH2-Z5 | 860014/024 | 27-Oct-2023 | 26-Oct-2024 |
| <input checked="" type="checkbox"/> | LISN | ETS-Lindgren | 3816/2SH | 00201088 | 27-Oct-2023 | 26-Oct-2024 |
| <input checked="" type="checkbox"/> | Test Software | EZ-EMC | EZ-CON | Software Version: EMC-CON 3A1.1 | | |

| Conducted RF test Equipment List | | | | | | |
|-------------------------------------|---|--------------|-----------|---------------|-------------|---------------|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date | Cal. Due date |
| <input checked="" type="checkbox"/> | EXA Spectrum Analyzer | KEYSIGHT | N9020A | MY51286807 | 27-Oct-2023 | 26-Oct-2024 |
| <input checked="" type="checkbox"/> | USB Wideband Power Sensor | KEYSIGHT | U2021XA | MY55430035 | 27-Oct-2023 | 26-Oct-2024 |
| <input type="checkbox"/> | MXG X-Series RF Vector Signal Generator | KEYSIGHT | N5182B | MY51350267 | 27-Oct-2023 | 26-Oct-2024 |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

| Environment Parameter | Selected Values During Tests | | |
|---|------------------------------|---------------------------------|-----------------------|
| Test Condition | Ambient | | |
| | Temperature (°C) | Voltage (V) | Relative Humidity (%) |
| NT/NV | +15 to +35 | DC 12V 1.5A or DC 44-57V by PoE | 20 to 75 |
| Remark: | | | |
| 1) NV: Normal Voltage; NT: Normal Temperature | | | |

4.1.2 Record of Normal Environment and Test Sample

| Test Item | Temp. (°C) | Relative Humidity (%) | Pressure (kPa) | Sample No. | Tested by |
|-----------------------------------|------------|-----------------------|----------------|-----------------------|------------|
| AC Power Line Conducted Emission | 21.1 | 43.0 | 100.1 | S202401262671-ZJA01/4 | Linson Xie |
| Conducted Peak Output Power | 22.7 | 56.1 | 100.1 | S202401262671-ZJA03/4 | Allen Zhou |
| 6dB Bandwidth | | | | | |
| Power Spectral Density | | | | | |
| Conducted Out of Band Emission | 25.8 | 54.1 | 100.2 | S202401262671-ZJA02/4 | Fire Huo |
| Radiated Spurious Emissions | | | | | |
| Band Edge Measurements (Radiated) | | | | | |

4.2 TEST CHANNELS

| Mode | Tx/Rx Frequency (MHz) | Test RF Channel Lists | | |
|---|-----------------------|-----------------------|-----------|------------|
| | | Lowest(L) | Middle(M) | Highest(H) |
| IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20 IEEE 802.11ax-HE20 | 2412-2462 | Channel 1 | Channel 6 | Channel 11 |
| | | 2412 MHz | 2437 MHz | 2462 MHz |
| Mode | Tx/Rx Frequency (MHz) | Test RF Channel Lists | | |
| | | Lowest(L) | Middle(M) | Highest(H) |
| IEEE 802.11n-HT40 IEEE 802.11ax-HE40 | 2422-2452 | Channel 3 | Channel 6 | Channel 9 |
| | | 2422 MHz | 2437 MHz | 2452 MHz |

4.3 EUT TEST STATUS

| Mode | Tx Function | Description |
|--|-------------|---|
| IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20 IEEE 802.11n-HT40 IEEE 802.11ax-HE20 IEEE 802.11ax-HE40 | 1Tx | 1. Keep the EUT in continuously transmitting with modulation test single. |

| Power Setting | | | |
|--------------------|-----------|-----------|------------|
| Mode | Lowest(L) | Middle(M) | Highest(H) |
| IEEE 802.11b | Default | Default | Default |
| IEEE 802.11g | Default | Default | Default |
| IEEE 802.11n-HT20 | Default | Default | Default |
| IEEE 802.11n-HT40 | Default | Default | Default |
| IEEE 802.11ax-HE20 | Default | Default | Default |
| IEEE 802.11ax-HE40 | Default | Default | Default |

| Test Software |
|-----------------------------|
| Test software name: Command |



4.4 PRE-SCAN


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

| Mode | Worst-case data rates |
|--------------------|-----------------------|
| IEEE 802.11b | 1 Mbps |
| IEEE 802.11g | 6 Mbps |
| IEEE 802.11n-HT20 | MCS8 |
| IEEE 802.11n-HT40 | MCS8 |
| IEEE 802.11ax-HE20 | MCS0 |
| IEEE 802.11ax-HE40 | MCS0 |


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

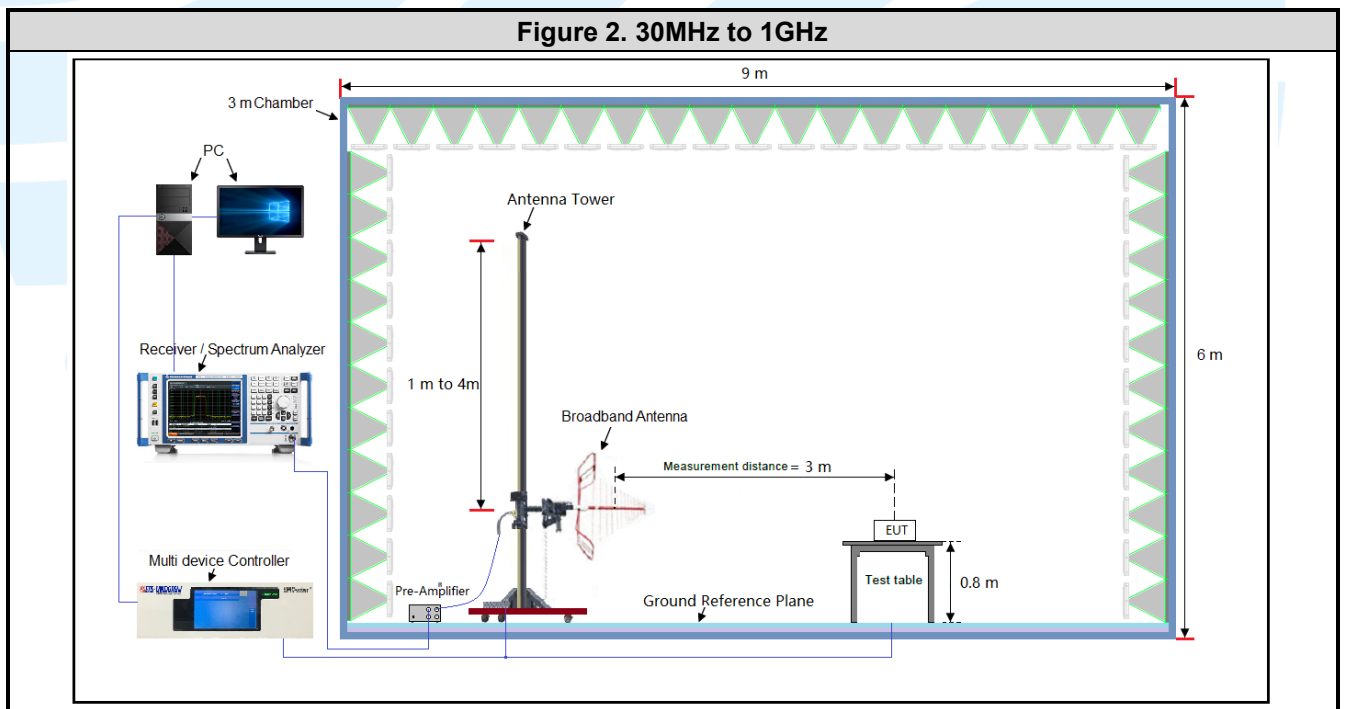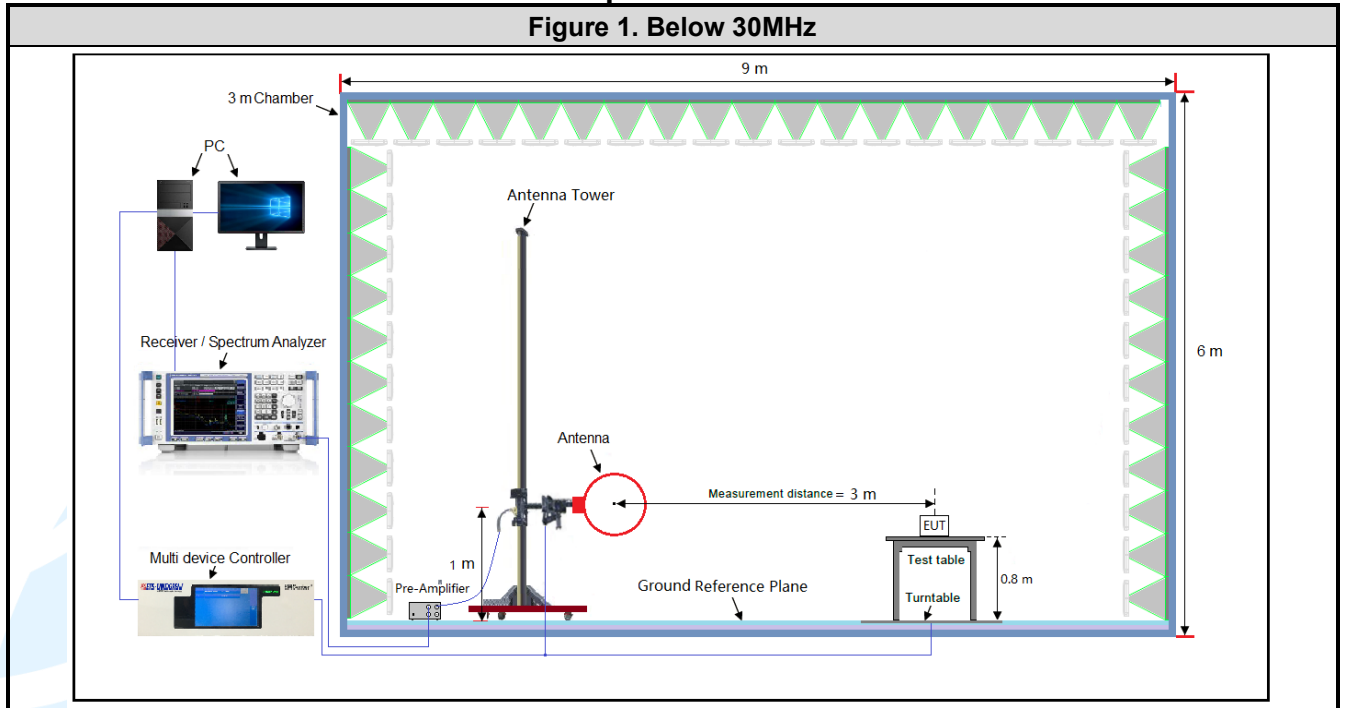


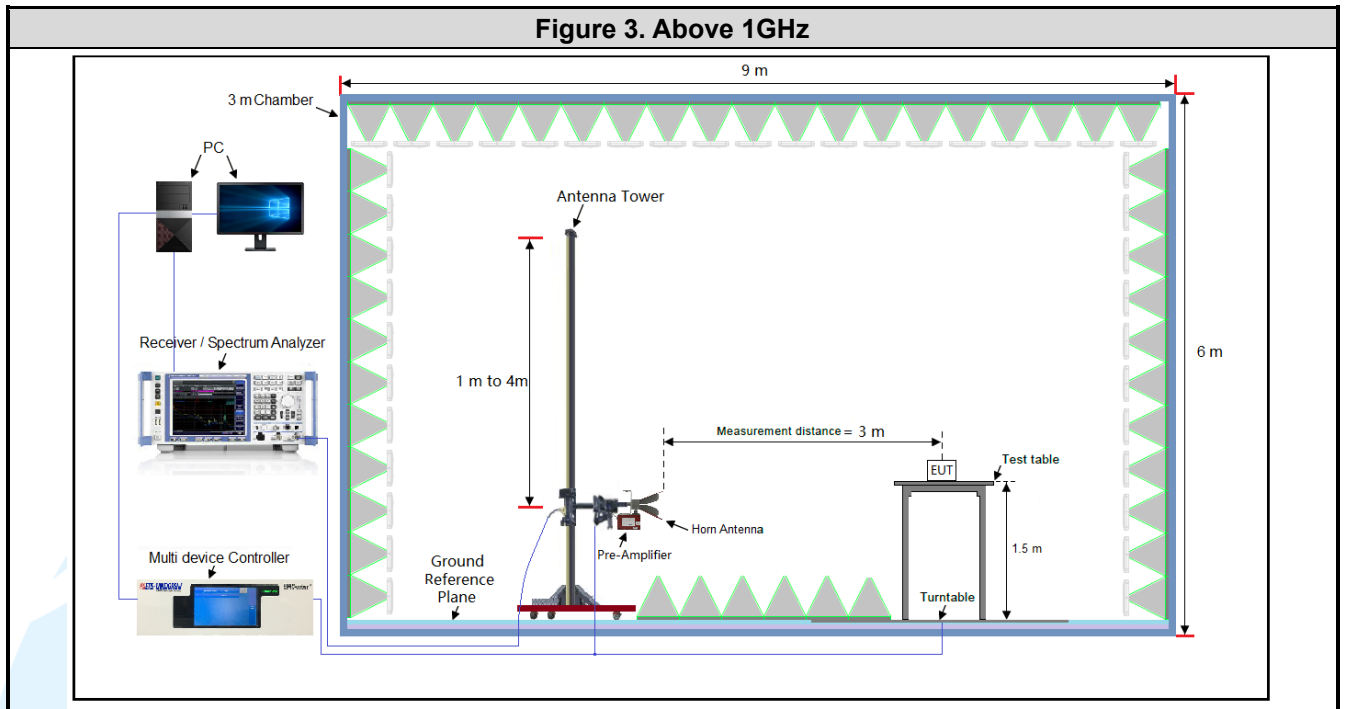

4.5.2 For Conducted Emissions test setup

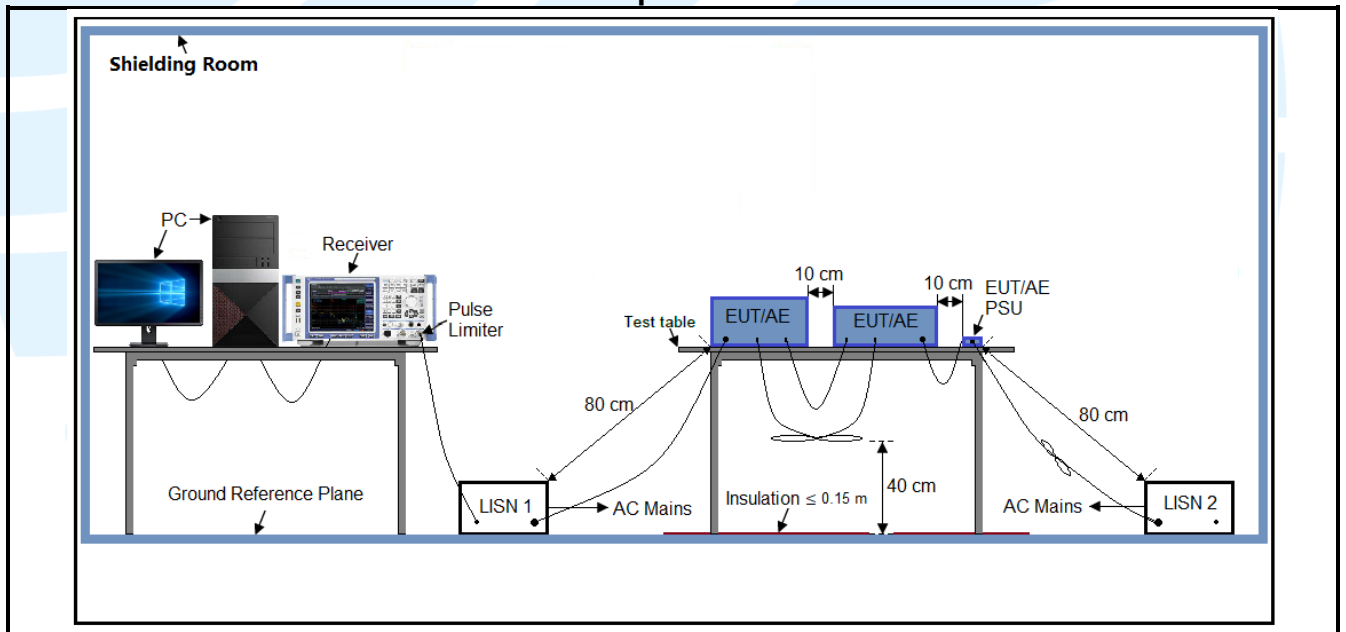

4.5.3 For Conducted RF test setup

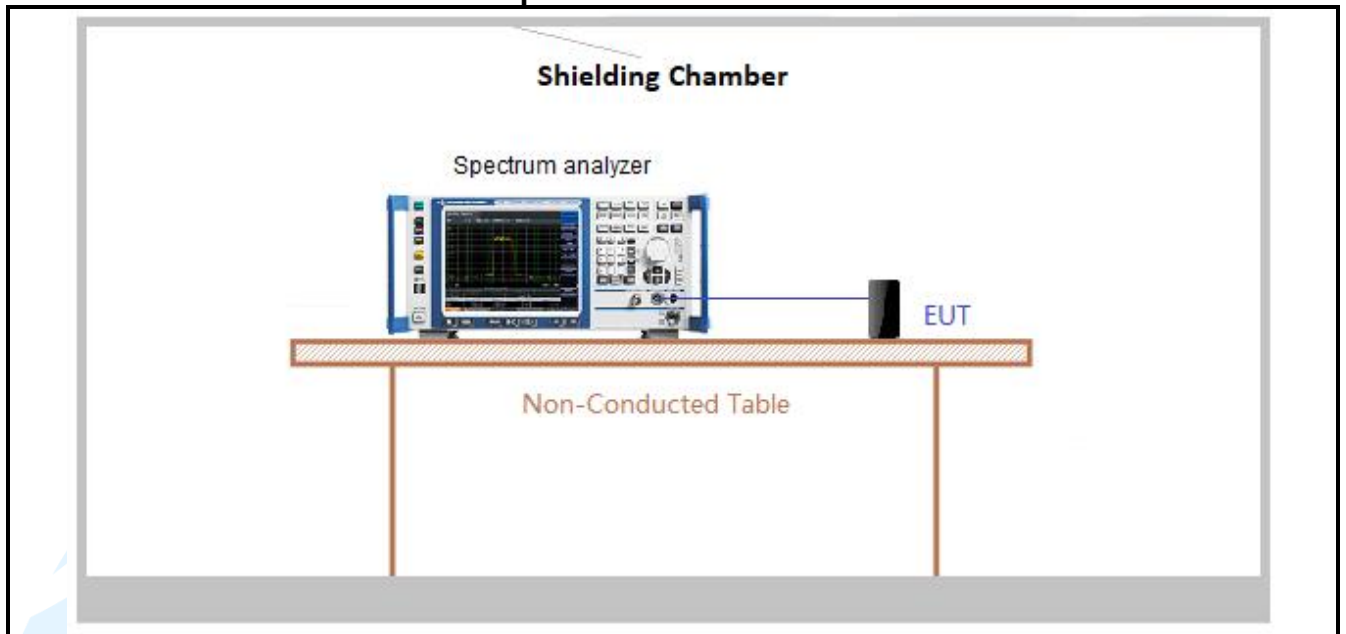

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results



| Mode | Data Rates | On Time (msec) | Period (msec) | Duty Cycle (linear) | Duty Cycle (%) | Duty Cycle Factor (dB) | 1/T Minimum VBW (kHz) |
|--------------------|------------|----------------|---------------|---------------------|----------------|------------------------|-----------------------|
| IEEE 802.11b | 1 Mbps | 12.180 | 12.360 | 0.99 | 98.54 | 0.00 | 0.01 |
| IEEE 802.11g | 6 Mbps | 2.040 | 2.160 | 0.94 | 94.44 | 0.25 | 0.49 |
| IEEE 802.11n-HT20 | MCS 0 | 5.100 | 5.220 | 0.98 | 97.70 | 0.10 | 0.20 |
| IEEE 802.11n-HT40 | MCS 0 | 4.920 | 5.040 | 0.98 | 97.62 | 0.10 | 0.20 |
| IEEE 802.11ax-HE20 | MCS 0 | 3.870 | 4.080 | 0.95 | 94.85 | 0.23 | 0.26 |
| IEEE 802.11ax-HE40 | MCS 0 | 3.870 | 3.990 | 0.97 | 96.99 | 0.13 | 0.26 |


Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 * log(1/ Duty cycle);
- 3) Average factor = 20 log₁₀ Duty Cycle.

The test plots as follows

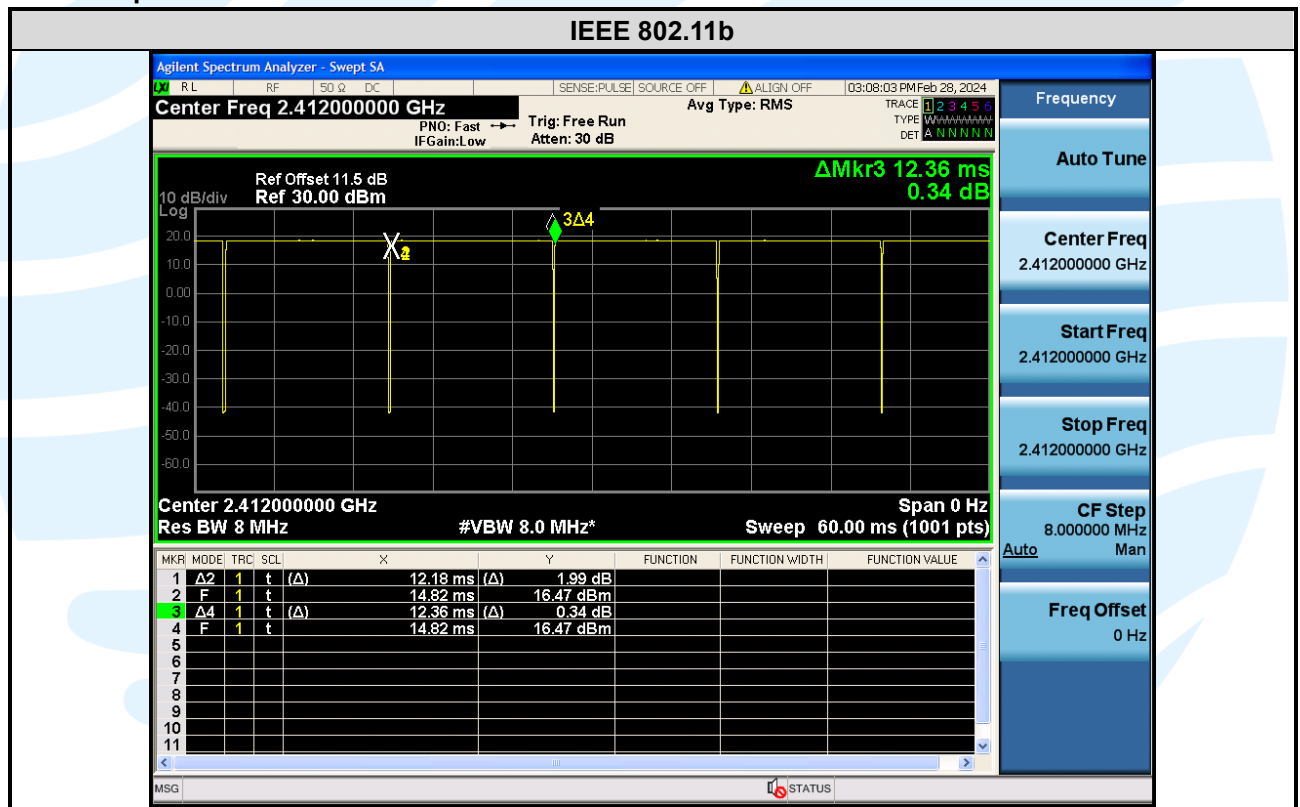

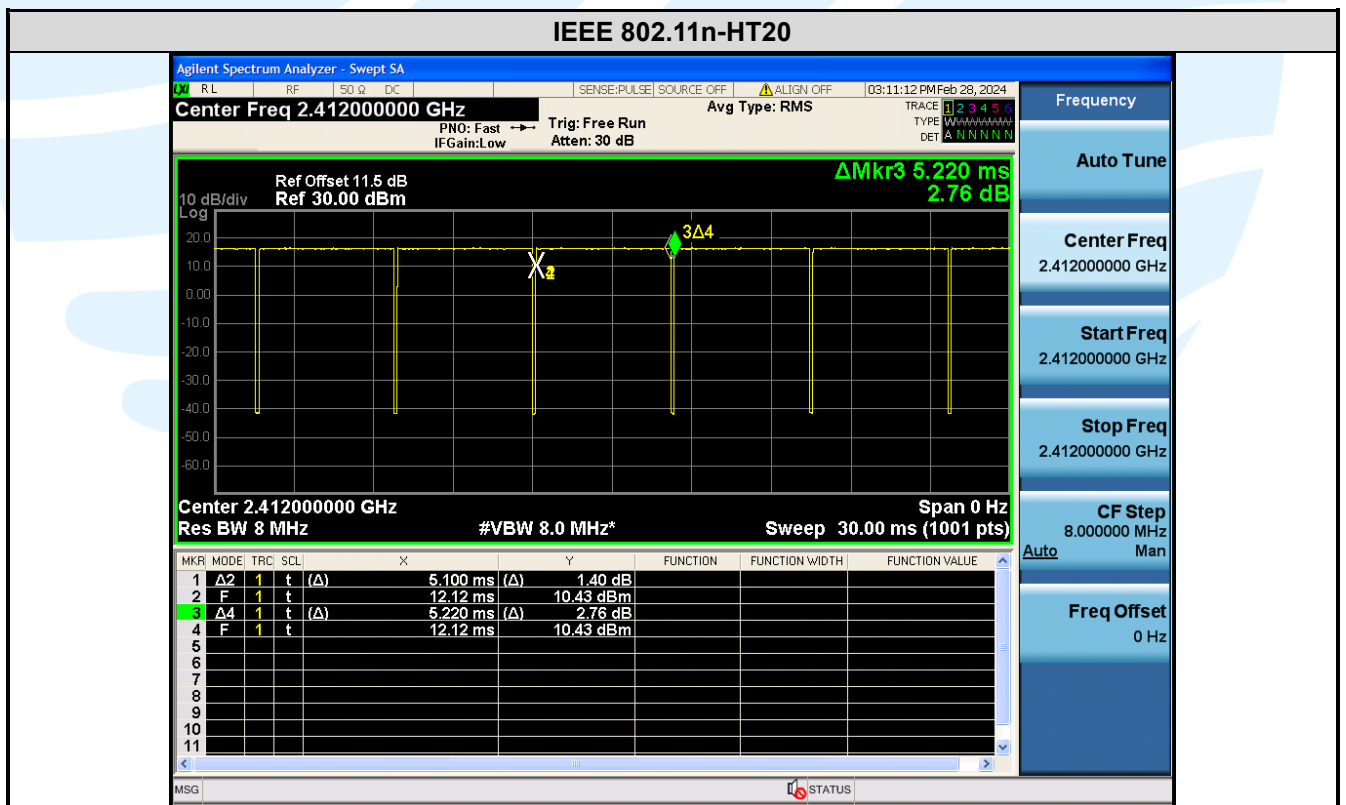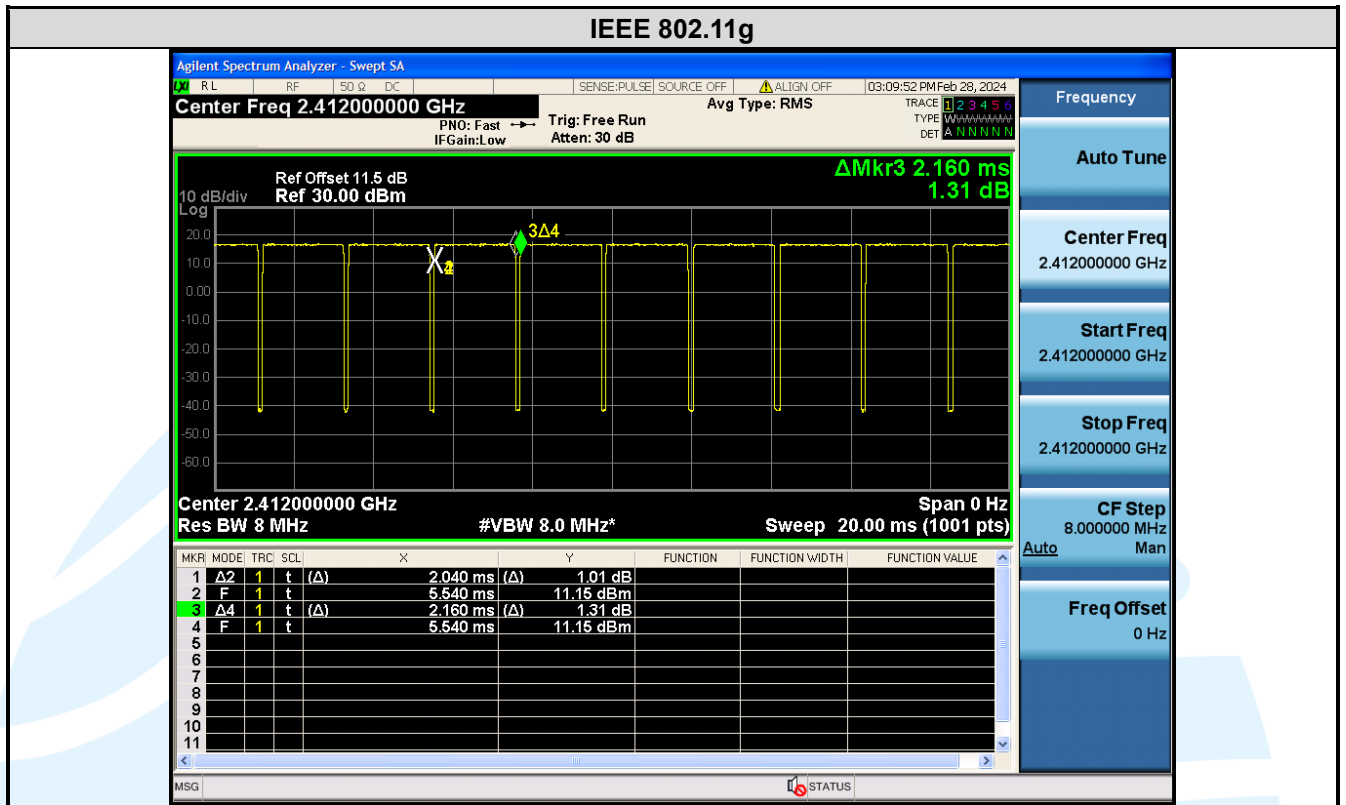

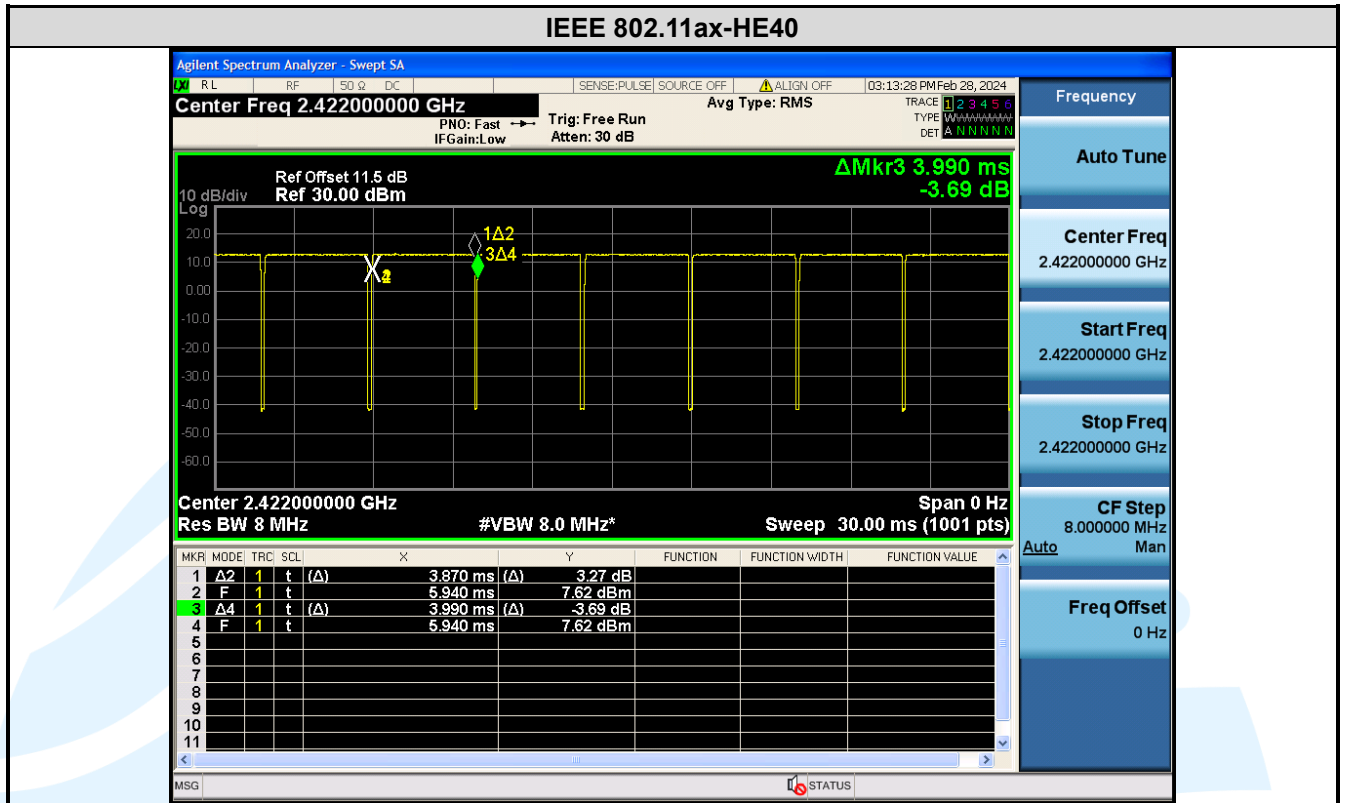

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

| No. | Identity | Document Title |
|-----|--|---|
| 1 | FCC 47 CFR Part 2 | Frequency allocations and radio treaty matters; general rules and regulations |
| 2 | FCC 47 CFR Part 15 | Radio Frequency Devices |
| 3 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |
| 4 | KDB 558074 D01 15.247 Meas Guidance v05r02 | Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules |

5.2 ANTENNA REQUIREMENT

| Standard Requirement |
|---|
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> |
| <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |
| <p>EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 4.72 dBi.</p> |

5.3 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)

Test Method: ANSI C63.10-2013 Clause 11.9.1.3

Limit: For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results:

| Mode | Channel/ Frequency (MHz) | Maximum Conducted Peak Power | | Maximum Conducted Average Power (dBm) | | Limit (dBm) | Result |
|-----------------------|--------------------------------|---------------------------------|--------|--|--------------------|----------------|--------|
| | | (dBm) | (W) | Measured Value | Corrected Value | | |
| IEEE 802.11b | 1(2412) | 21.74 | 0.1493 | 20.03 | 20.03 | 30 | Pass |
| | 6(2437) | 21.01 | 0.1262 | 19.11 | 19.11 | 30 | Pass |
| | 11(2462) | 21.12 | 0.1294 | 19.23 | 19.23 | 30 | Pass |
| IEEE 802.11g | 1(2412) | 24.56 | 0.2858 | 19.38 | 19.63 | 30 | Pass |
| | 6(2437) | 24.53 | 0.2838 | 19.46 | 19.71 | 30 | Pass |
| | 11(2462) | 24.29 | 0.2685 | 18.24 | 18.49 | 30 | Pass |
| IEEE 802.11n-HT20 | 1(2412) | 24.63 | 0.2904 | 19.47 | 19.57 | 30 | Pass |
| | 6(2437) | 24.58 | 0.2871 | 19.58 | 19.68 | 30 | Pass |
| | 11(2462) | 24.07 | 0.2553 | 18.04 | 18.14 | 30 | Pass |
| IEEE 802.11n-HT40 | 3(2422) | 24.52 | 0.2831 | 19.16 | 19.26 | 30 | Pass |
| | 6(2437) | 24.68 | 0.2938 | 19.52 | 19.62 | 30 | Pass |
| | 9(2452) | 24.33 | 0.2710 | 19.19 | 19.29 | 30 | Pass |
| IEEE 802.11ax-HE20 | 1(2412) | 24.54 | 0.2844 | 19.33 | 19.43 | 30 | Pass |
| | 6(2437) | 24.41 | 0.2761 | 19.39 | 19.49 | 30 | Pass |
| | 11(2462) | 24.12 | 0.2582 | 18.22 | 18.32 | 30 | Pass |
| IEEE 802.11ax-HE40 | 3(2422) | 24.55 | 0.2851 | 19.07 | 19.30 | 30 | Pass |
| | 6(2437) | 24.77 | 0.2999 | 19.44 | 19.67 | 30 | Pass |
| | 9(2452) | 24.35 | 0.2723 | 19.15 | 19.38 | 30 | Pass |

Note: The antenna gain of 4.72 dBi less than 6dBi maximum permission antenna gain value based on 1 watt (30dBm) peak output power limit.

5.46 DB BANDWIDTH

| | |
|--------------------------|---|
| Test Requirement: | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2) |
| Test Method: | ANSI C63.10-2013 Clause 11.8.1 |
| Limit: | For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz |
| Test Procedure: | <p>Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.</p> <p>Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none">a) Set RBW = 100 kHz.b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.c) Detector = Peak.d) Trace mode = max hold.e) Sweep = auto couple.f) Allow the trace to stabilize.g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p> |
| Test Setup: | Refer to section 4.5.3 for details. |
| Instruments Used: | Refer to section 3 for details |
| Test Mode: | Link mode |
| Test Results: | Please refer to Appendix A |

5.5 POWER SPECTRAL DENSITY

| | |
|--------------------------|---|
| Test Requirement: | FCC 47 CFR Part 15 Subpart C Section 15.247 (e) |
| Test Method: | ANSI C63.10-2013 Clause 11.10.2 |
| Limit: | For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission. |
| Test Procedure: | <p>Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.</p> <p>Use the following spectrum analyzer settings:</p> <ol style="list-style-type: none">Set analyzer center frequency to DTS channel center frequency.Set the span to 1.5 times the DTS bandwidth.Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.Set the VBW $\geq 3 \times \text{RBW}$.Detector = peak.Sweep time = auto couple.Trace mode = max hold.Allow trace to fully stabilize.Use the peak marker function to determine the maximum amplitude level within the RBW.If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p> |
| Test Setup: | Refer to section 4.5.3 for details. |
| Instruments Used: | Refer to section 3 for details |
| Test Mode: | Link mode |
| Test Results: | Please refer to Appendix A |

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(d)

Test Method: ANSI C63.10-2013 Clause 11.11

Limit: In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.
- j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Step 2: Measurement Procedure OOBE

- a) Set RBW = 100 kHz.
- b) Set VBW ≥ 300 kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.7 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2013 Clause 11.11 & Clause 11.12

Receiver Setup:

| Frequency | RBW |
|---------------------|-------------|
| 0.009 MHz-0.150 MHz | 200/300 kHz |
| 0.150 MHz -30 MHz | 9/10 kHz |
| 30 MHz-1 GHz | 100/120 kHz |
| Above 1 GHz | 1 MHz |

Limits:

Spurious Emissions

| Frequency | Field strength (microvolt/meter) | Limit (dB μ V/m) | Remark | Measurement distance (m) |
|---------------------|----------------------------------|----------------------|------------|--------------------------|
| 0.009 MHz-0.490 MHz | 2400/F(kHz) | -- | -- | 300 |
| 0.490 MHz-1.705 MHz | 24000/F(kHz) | -- | -- | 30 |
| 1.705 MHz-30 MHz | 30 | -- | -- | 30 |
| 30 MHz-88 MHz | 100 | 40.0 | Quasi-peak | 3 |
| 88 MHz-216 MHz | 150 | 43.5 | Quasi-peak | 3 |
| 216 MHz-960 MHz | 200 | 46.0 | Quasi-peak | 3 |
| 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| Above 1 GHz | 500 | 54.0 | Average | 3 |

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dB μ V/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

- From 30 MHz to 1GHz test procedure as below:
 - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Above 1GHz test procedure as below:
 - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
 - Test the EUT in the lowest channel, middle channel, the Highest channel

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Z axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.

Test Result: Pass


The measurement data as follows:

Radiated Emission Test Data (9 kHz ~ 30 MHz):


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**Radiated Emission Test Data (30 MHz ~ 1 GHz):
Worst-Case Configuration(IEEE 802.11b Channel 1)**

Horizontal

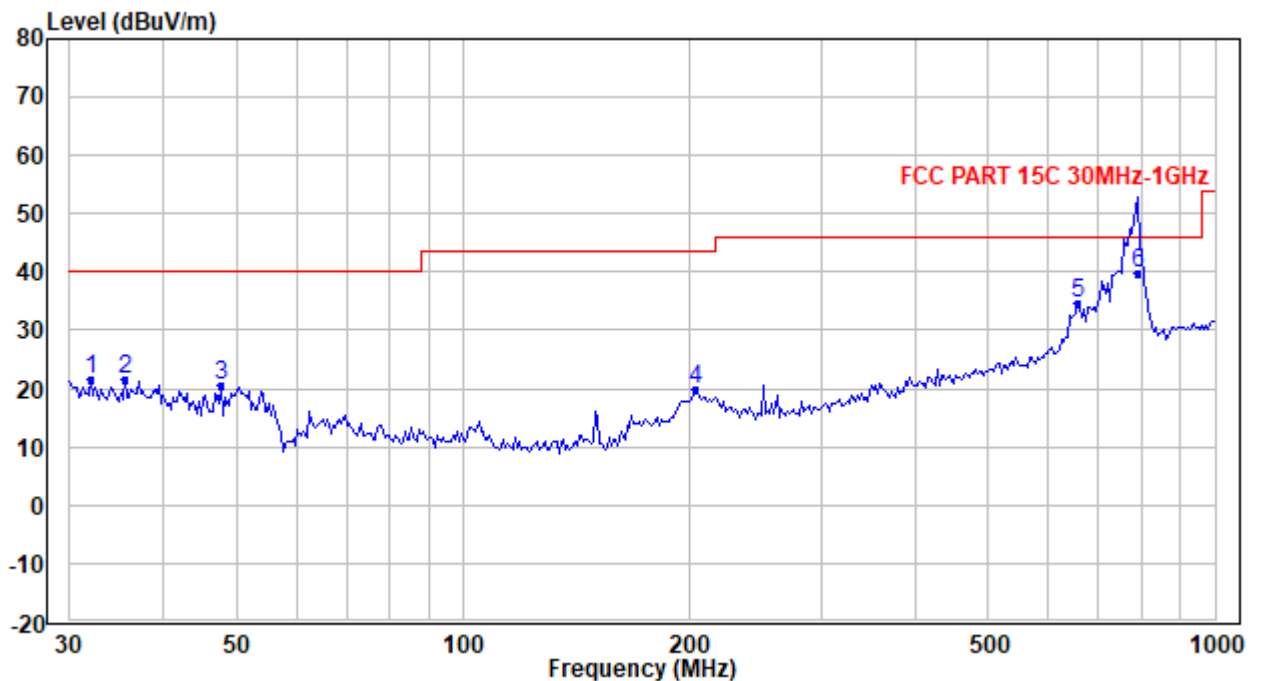

| No. | Frequency (MHz) | Reading (dB μ V/m) | Correction factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-----|-----------------|------------------------|--------------------------|-----------------------|----------------------|-------------|----------|
| 1 | 31.959 | 27.55 | -6.12 | 21.43 | 40.00 | -18.57 | QP |
| 2 | 35.511 | 28.33 | -6.74 | 21.59 | 40.00 | -18.41 | QP |
| 3 | 47.703 | 33.68 | -13.10 | 20.58 | 40.00 | -19.42 | QP |
| 4 | 204.305 | 30.75 | -11.05 | 19.70 | 43.50 | -23.80 | QP |
| 5 | 655.977 | 34.16 | 0.41 | 34.57 | 46.00 | -11.43 | QP |
| 6 | 787.475 | 37.11 | 2.72 | 39.83 | 46.00 | -6.17 | QP |

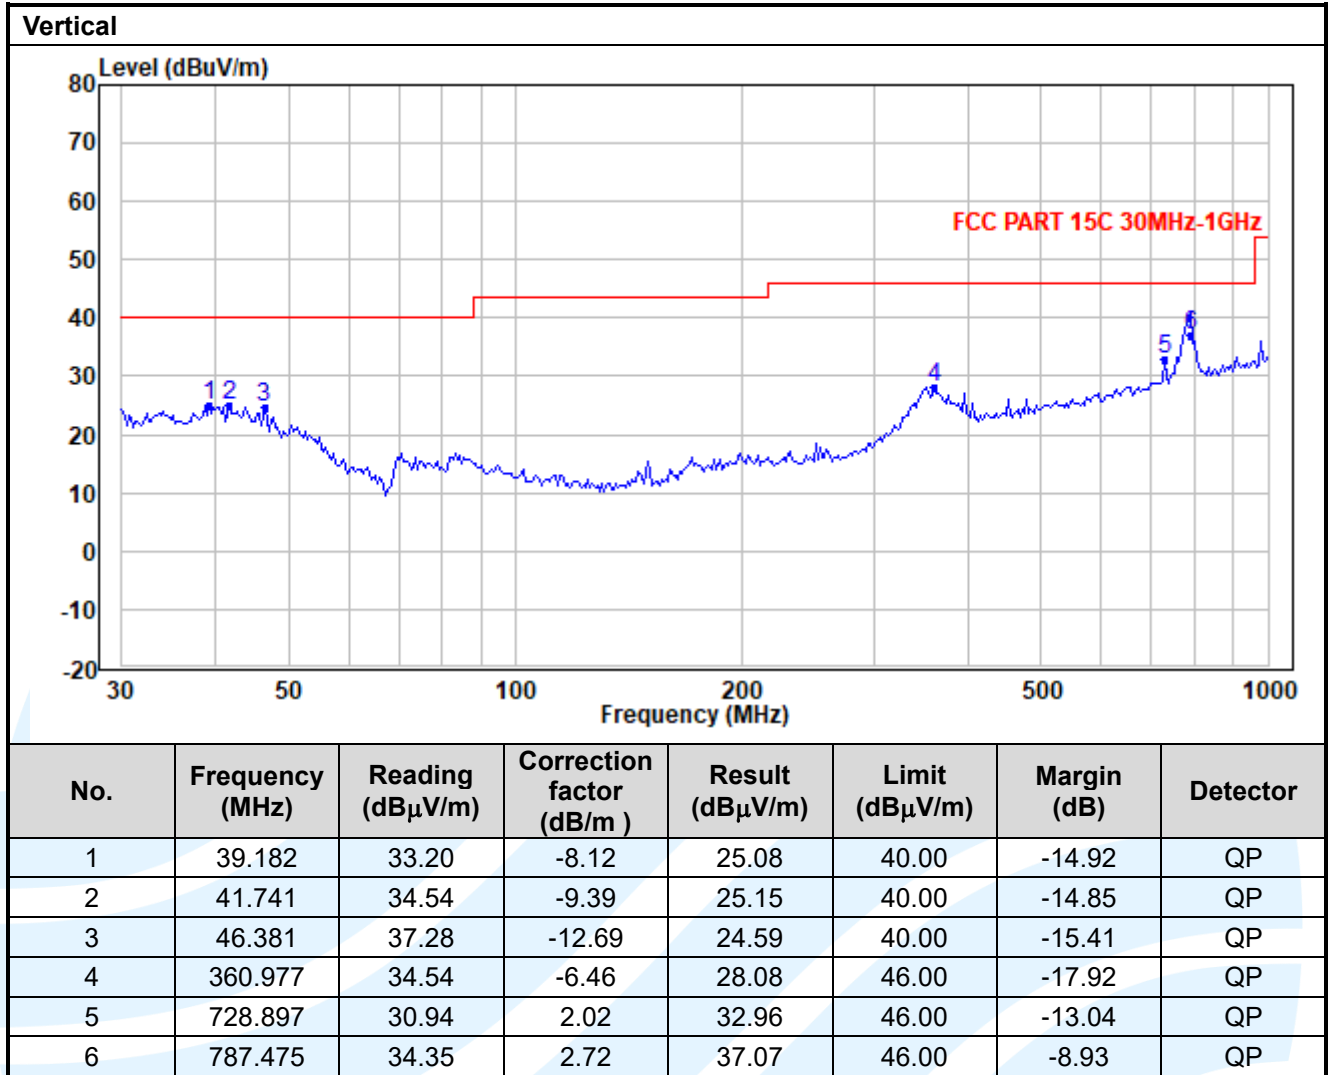

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

| Radiated Emission Test Data (Above 1GHz): | | | | | | | | |
|---|-----------------|----------------|--------------------------|-----------------|----------------|-------------|----------|-----------------|
| IEEE 802.11b_ Channel 1: | | | | | | | | |
| No. | Frequency (MHz) | Reading (dBµV) | Correction factor (dB/m) | Result (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Detector | Antenna Polaxis |
| 1 | 4824.000 | 37.42 | -0.84 | 36.58 | 54.00 | -17.42 | Average | Horizontal |
| 2 | 4824.000 | 54.29 | -0.84 | 53.45 | 74.00 | -20.55 | Peak | Horizontal |
| 3 | 7236.000 | 27.97 | 2.88 | 30.85 | 54.00 | -23.15 | Average | Horizontal |
| 4 | 7236.000 | 40.44 | 2.88 | 43.32 | 74.00 | -30.68 | Peak | Horizontal |
| 5 | 4824.000 | 32.88 | -0.84 | 32.04 | 54.00 | -21.96 | Average | Vertical |
| 6 | 4824.000 | 48.62 | -0.84 | 47.78 | 74.00 | -26.22 | Peak | Vertical |
| 7 | 7236.000 | 27.91 | 2.88 | 30.79 | 54.00 | -23.21 | Average | Vertical |
| 8 | 7236.000 | 39.93 | 2.88 | 42.81 | 74.00 | -31.19 | Peak | Vertical |
| IEEE 802.11b_ Channel 6: | | | | | | | | |
| 1 | 4874.000 | 40.15 | -0.77 | 39.38 | 54.00 | -14.62 | Average | Horizontal |
| 2 | 4874.000 | 58.68 | -0.77 | 57.91 | 74.00 | -16.09 | Peak | Horizontal |
| 3 | 7311.000 | 27.27 | 2.95 | 30.22 | 54.00 | -23.78 | Average | Horizontal |
| 4 | 7311.000 | 39.24 | 2.95 | 42.19 | 74.00 | -31.81 | Peak | Horizontal |
| 5 | 4874.000 | 35.15 | -0.77 | 34.38 | 54.00 | -19.62 | Average | Vertical |
| 6 | 4874.000 | 52.87 | -0.77 | 52.10 | 74.00 | -21.90 | Peak | Vertical |
| 7 | 7311.000 | 27.21 | 2.95 | 30.16 | 54.00 | -23.84 | Average | Vertical |
| 8 | 7311.000 | 39.86 | 2.95 | 42.81 | 74.00 | -31.19 | Peak | Vertical |
| IEEE 802.11b_ Channel 11: | | | | | | | | |
| 1 | 4924.000 | 33.31 | -0.71 | 32.60 | 54.00 | -21.40 | Average | Horizontal |
| 2 | 4924.000 | 50.75 | -0.71 | 50.04 | 74.00 | -23.96 | Peak | Horizontal |
| 3 | 7386.000 | 26.43 | 3.01 | 29.44 | 54.00 | -24.56 | Average | Horizontal |
| 4 | 7386.000 | 38.58 | 3.01 | 41.59 | 74.00 | -32.41 | Peak | Horizontal |
| 5 | 4924.000 | 26.57 | -0.71 | 25.86 | 54.00 | -28.14 | Average | Vertical |
| 6 | 4924.000 | 42.20 | -0.71 | 41.49 | 74.00 | -32.51 | Peak | Vertical |
| 7 | 7386.000 | 26.36 | 3.01 | 29.37 | 54.00 | -24.63 | Average | Vertical |
| 8 | 7386.000 | 38.28 | 3.01 | 41.29 | 74.00 | -32.71 | Peak | Vertical |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

| IEEE 802.11g_Channel 1: | | | | | | | | |
|--------------------------|-----------------|----------------|--------------------------|-----------------|----------------|-------------|----------|-----------------|
| No. | Frequency (MHz) | Reading (dBµV) | Correction factor (dB/m) | Result (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Detector | Antenna Polaxis |
| 1 | 4824.000 | 39.45 | -0.84 | 38.61 | 54.00 | -15.39 | Average | Horizontal |
| 2 | 4824.000 | 52.46 | -0.84 | 51.62 | 74.00 | -22.38 | Peak | Horizontal |
| 3 | 7236.000 | 27.91 | 2.88 | 30.79 | 54.00 | -23.21 | Average | Horizontal |
| 4 | 7236.000 | 40.18 | 2.88 | 43.06 | 74.00 | -30.94 | Peak | Horizontal |
| 5 | 4824.000 | 36.34 | -0.84 | 35.50 | 54.00 | -18.50 | Average | Vertical |
| 6 | 4824.000 | 47.02 | -0.84 | 46.18 | 74.00 | -27.82 | Peak | Vertical |
| 7 | 7236.000 | 27.74 | 2.88 | 30.62 | 54.00 | -23.38 | Average | Vertical |
| 8 | 7236.000 | 40.23 | 2.88 | 43.11 | 74.00 | -30.89 | Peak | Vertical |
| IEEE 802.11g_Channel 6: | | | | | | | | |
| 1 | 4874.000 | 45.46 | -0.77 | 44.69 | 54.00 | -9.31 | Average | Horizontal |
| 2 | 4874.000 | 61.59 | -0.77 | 60.82 | 74.00 | -13.18 | Peak | Horizontal |
| 3 | 7311.000 | 27.99 | 2.95 | 30.94 | 54.00 | -23.06 | Average | Horizontal |
| 4 | 7311.000 | 39.76 | 2.95 | 42.71 | 74.00 | -31.29 | Peak | Horizontal |
| 5 | 4874.000 | 41.54 | -0.77 | 40.77 | 54.00 | -13.23 | Average | Vertical |
| 6 | 4874.000 | 53.15 | -0.77 | 52.38 | 74.00 | -21.62 | Peak | Vertical |
| 7 | 7311.000 | 27.52 | 2.95 | 30.47 | 54.00 | -23.53 | Average | Vertical |
| 8 | 7311.000 | 39.86 | 2.95 | 42.81 | 74.00 | -31.19 | Peak | Vertical |
| IEEE 802.11g_Channel 11: | | | | | | | | |
| 1 | 4924.000 | 37.70 | -0.71 | 36.99 | 54.00 | -17.01 | Average | Horizontal |
| 2 | 4924.000 | 50.94 | -0.71 | 50.23 | 74.00 | -23.77 | Peak | Horizontal |
| 3 | 7386.000 | 26.64 | 3.01 | 29.65 | 54.00 | -24.35 | Average | Horizontal |
| 4 | 7386.000 | 38.83 | 3.01 | 41.84 | 74.00 | -32.16 | Peak | Horizontal |
| 5 | 4924.000 | 29.53 | -0.71 | 28.82 | 54.00 | -25.18 | Average | Vertical |
| 6 | 4924.000 | 42.06 | -0.71 | 41.35 | 74.00 | -32.65 | Peak | Vertical |
| 7 | 7386.000 | 26.36 | 3.01 | 29.37 | 54.00 | -24.63 | Average | Vertical |
| 8 | 7386.000 | 37.72 | 3.01 | 40.73 | 74.00 | -33.27 | Peak | Vertical |

| IEEE 802.11n-HT20_Channel 1: | | | | | | | | |
|-------------------------------|-----------------|----------------|--------------------------|-----------------|----------------|-------------|----------|-----------------|
| No. | Frequency (MHz) | Reading (dBμV) | Correction factor (dB/m) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
| 1 | 4824.000 | 42.31 | -0.84 | 41.47 | 54.00 | -12.53 | Average | Horizontal |
| 2 | 4824.000 | 51.90 | -0.84 | 51.06 | 74.00 | -22.94 | Peak | Horizontal |
| 3 | 7236.000 | 27.85 | 2.88 | 30.73 | 54.00 | -23.27 | Average | Horizontal |
| 4 | 7236.000 | 40.91 | 2.88 | 43.79 | 74.00 | -30.21 | Peak | Horizontal |
| 5 | 4824.000 | 36.81 | -0.84 | 35.97 | 54.00 | -18.03 | Average | Vertical |
| 6 | 4824.000 | 48.79 | -0.84 | 47.95 | 74.00 | -26.05 | Peak | Vertical |
| 7 | 7236.000 | 27.74 | 2.88 | 30.62 | 54.00 | -23.38 | Average | Vertical |
| 8 | 7236.000 | 39.78 | 2.88 | 42.66 | 74.00 | -31.34 | Peak | Vertical |
| IEEE 802.11n-HT20_Channel 6: | | | | | | | | |
| 1 | 4874.000 | 47.77 | -0.77 | 47.00 | 54.00 | -7.00 | Average | Horizontal |
| 2 | 4874.000 | 59.52 | -0.77 | 58.75 | 74.00 | -15.25 | Peak | Horizontal |
| 3 | 7311.000 | 27.88 | 2.95 | 30.83 | 54.00 | -23.17 | Average | Horizontal |
| 4 | 7311.000 | 40.30 | 2.95 | 43.25 | 74.00 | -30.75 | Peak | Horizontal |
| 5 | 4874.000 | 40.96 | -0.77 | 40.19 | 54.00 | -13.81 | Average | Vertical |
| 6 | 4874.000 | 54.96 | -0.77 | 54.19 | 74.00 | -19.81 | Peak | Vertical |
| 7 | 7311.000 | 27.46 | 2.95 | 30.41 | 54.00 | -23.59 | Average | Vertical |
| 8 | 7311.000 | 39.41 | 2.95 | 42.36 | 74.00 | -31.64 | Peak | Vertical |
| IEEE 802.11n-HT20_Channel 11: | | | | | | | | |
| 1 | 4924.000 | 37.99 | -0.71 | 37.28 | 54.00 | -16.72 | Average | Horizontal |
| 2 | 4924.000 | 50.79 | -0.71 | 50.08 | 74.00 | -23.92 | Peak | Horizontal |
| 3 | 7386.000 | 26.64 | 3.01 | 29.65 | 54.00 | -24.35 | Average | Horizontal |
| 4 | 7386.000 | 38.52 | 3.01 | 41.53 | 74.00 | -32.47 | Peak | Horizontal |
| 5 | 4924.000 | 37.57 | -0.71 | 36.86 | 54.00 | -17.14 | Average | Vertical |
| 6 | 4924.000 | 51.94 | -0.71 | 51.23 | 74.00 | -22.77 | Peak | Vertical |
| 7 | 7386.000 | 26.64 | 3.01 | 29.65 | 54.00 | -24.35 | Average | Vertical |
| 8 | 7386.000 | 39.17 | 3.01 | 42.18 | 74.00 | -31.82 | Peak | Vertical |

| IEEE 802.11n-HT40_ Channel 3: | | | | | | | | |
|-------------------------------|-----------------|----------------|--------------------------|-----------------|----------------|-------------|----------|-----------------|
| No. | Frequency (MHz) | Reading (dBμV) | Correction factor (dB/m) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
| 1 | 4844.000 | 42.19 | -0.81 | 41.38 | 54.00 | -12.62 | Average | Horizontal |
| 2 | 4844.000 | 54.00 | -0.81 | 53.19 | 74.00 | -20.81 | Peak | Horizontal |
| 3 | 7266.000 | 28.00 | 2.91 | 30.91 | 54.00 | -23.09 | Average | Horizontal |
| 4 | 7266.000 | 40.73 | 2.91 | 43.64 | 74.00 | -30.36 | Peak | Horizontal |
| 5 | 4844.000 | 36.13 | -0.81 | 35.32 | 54.00 | -18.68 | Average | Vertical |
| 6 | 4844.000 | 48.39 | -0.81 | 47.58 | 74.00 | -26.42 | Peak | Vertical |
| 7 | 7266.000 | 27.77 | 2.91 | 30.68 | 54.00 | -23.32 | Average | Vertical |
| 8 | 7266.000 | 40.15 | 2.91 | 43.06 | 74.00 | -30.94 | Peak | Vertical |
| IEEE 802.11n-HT40_ Channel 6: | | | | | | | | |
| 1 | 4874.000 | 45.99 | -0.77 | 45.22 | 54.00 | -8.78 | Average | Horizontal |
| 2 | 4874.000 | 56.96 | -0.77 | 56.19 | 74.00 | -17.81 | Peak | Horizontal |
| 3 | 7311.000 | 27.64 | 2.95 | 30.59 | 54.00 | -23.41 | Average | Horizontal |
| 4 | 7311.000 | 39.08 | 2.95 | 42.03 | 74.00 | -31.97 | Peak | Horizontal |
| 5 | 4874.000 | 40.25 | -0.77 | 39.48 | 54.00 | -14.52 | Average | Vertical |
| 6 | 4874.000 | 52.54 | -0.77 | 51.77 | 74.00 | -22.23 | Peak | Vertical |
| 7 | 7311.000 | 27.27 | 2.95 | 30.22 | 54.00 | -23.78 | Average | Vertical |
| 8 | 7311.000 | 39.00 | 2.95 | 41.95 | 74.00 | -32.05 | Peak | Vertical |
| IEEE 802.11n-HT40_ Channel 9: | | | | | | | | |
| 1 | 4904.000 | 42.88 | -0.74 | 42.14 | 54.00 | -11.86 | Average | Horizontal |
| 2 | 4904.000 | 55.68 | -0.74 | 54.94 | 74.00 | -19.06 | Peak | Horizontal |
| 3 | 7356.000 | 26.32 | 2.98 | 29.30 | 54.00 | -24.70 | Average | Horizontal |
| 4 | 7356.000 | 38.22 | 2.98 | 41.20 | 74.00 | -32.80 | Peak | Horizontal |
| 5 | 4904.000 | 36.60 | -0.74 | 35.86 | 54.00 | -18.14 | Average | Vertical |
| 6 | 4904.000 | 47.91 | -0.74 | 47.17 | 74.00 | -26.83 | Peak | Vertical |
| 7 | 7356.000 | 26.39 | 2.98 | 29.37 | 54.00 | -24.63 | Average | Vertical |
| 8 | 7356.000 | 37.69 | 2.98 | 40.67 | 74.00 | -33.33 | Peak | Vertical |

| IEEE 802.11ax-HE20_Channel 1: | | | | | | | | |
|--------------------------------|-----------------|----------------|--------------------------|-----------------|----------------|-------------|----------|-----------------|
| No. | Frequency (MHz) | Reading (dBμV) | Correction factor (dB/m) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
| 1 | 4824.000 | 42.48 | -0.84 | 41.64 | 54.00 | -12.36 | Average | Horizontal |
| 2 | 4824.000 | 52.14 | -0.84 | 51.30 | 74.00 | -22.70 | Peak | Horizontal |
| 3 | 7236.000 | 27.91 | 2.88 | 30.79 | 54.00 | -23.21 | Average | Horizontal |
| 4 | 7236.000 | 40.31 | 2.88 | 43.19 | 74.00 | -30.81 | Peak | Horizontal |
| 5 | 4824.000 | 35.81 | -0.84 | 34.97 | 54.00 | -19.03 | Average | Vertical |
| 6 | 4824.000 | 47.70 | -0.84 | 46.86 | 74.00 | -27.14 | Peak | Vertical |
| 7 | 7236.000 | 27.85 | 2.88 | 30.73 | 54.00 | -23.27 | Average | Vertical |
| 8 | 7236.000 | 40.39 | 2.88 | 43.27 | 74.00 | -30.73 | Peak | Vertical |
| IEEE 802.11ax-HE20_Channel 6: | | | | | | | | |
| 1 | 4874.000 | 47.01 | -0.77 | 46.24 | 54.00 | -7.76 | Average | Horizontal |
| 2 | 4874.000 | 58.72 | -0.77 | 57.95 | 74.00 | -16.05 | Peak | Horizontal |
| 3 | 7311.000 | 27.70 | 2.95 | 30.65 | 54.00 | -23.35 | Average | Horizontal |
| 4 | 7311.000 | 39.28 | 2.95 | 42.23 | 74.00 | -31.77 | Peak | Horizontal |
| 5 | 4874.000 | 41.24 | -0.77 | 40.47 | 54.00 | -13.53 | Average | Vertical |
| 6 | 4874.000 | 53.14 | -0.77 | 52.37 | 74.00 | -21.63 | Peak | Vertical |
| 7 | 7311.000 | 27.52 | 2.95 | 30.47 | 54.00 | -23.53 | Average | Vertical |
| 8 | 7311.000 | 39.77 | 2.95 | 42.72 | 74.00 | -31.28 | Peak | Vertical |
| IEEE 802.11ax-HE20_Channel 11: | | | | | | | | |
| 1 | 4924.000 | 37.68 | -0.71 | 36.97 | 54.00 | -17.03 | Average | Horizontal |
| 2 | 4924.000 | 51.05 | -0.71 | 50.34 | 74.00 | -23.66 | Peak | Horizontal |
| 3 | 7386.000 | 26.50 | 3.01 | 29.51 | 54.00 | -24.49 | Average | Horizontal |
| 4 | 7386.000 | 37.64 | 3.01 | 40.65 | 74.00 | -33.35 | Peak | Horizontal |
| 5 | 4924.000 | 29.19 | -0.71 | 28.48 | 54.00 | -25.52 | Average | Vertical |
| 6 | 4924.000 | 41.87 | -0.71 | 41.16 | 74.00 | -32.84 | Peak | Vertical |
| 7 | 7386.000 | 26.29 | 3.01 | 29.30 | 54.00 | -24.70 | Average | Vertical |
| 8 | 7386.000 | 38.71 | 3.01 | 41.72 | 74.00 | -32.28 | Peak | Vertical |

| IEEE 802.11ax-HE40_Channel 3: | | | | | | | | |
|-------------------------------|-----------------|----------------|--------------------------|-----------------|----------------|-------------|----------|-----------------|
| No. | Frequency (MHz) | Reading (dBμV) | Correction factor (dB/m) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Antenna Polaxis |
| 1 | 4844.000 | 45.02 | -0.81 | 44.21 | 74.00 | -29.79 | Peak | Horizontal |
| 2 | 4844.000 | 30.78 | -0.81 | 29.97 | 54.00 | -24.03 | Average | Horizontal |
| 3 | 7266.000 | 40.18 | 2.91 | 43.09 | 74.00 | -30.91 | Peak | Horizontal |
| 4 | 7266.000 | 27.59 | 2.91 | 30.50 | 54.00 | -23.50 | Average | Horizontal |
| 5 | 4844.000 | 27.47 | -0.81 | 26.66 | 54.00 | -27.34 | Average | Vertical |
| 6 | 4844.000 | 42.27 | -0.81 | 41.46 | 74.00 | -32.54 | Peak | Vertical |
| 7 | 7266.000 | 27.47 | 2.91 | 30.38 | 54.00 | -23.62 | Average | Vertical |
| 8 | 7266.000 | 40.03 | 2.91 | 42.94 | 74.00 | -31.06 | Peak | Vertical |
| IEEE 802.11ax-HE40_Channel 6: | | | | | | | | |
| 1 | 4874.000 | 34.44 | -0.77 | 33.67 | 54.00 | -20.33 | Average | Horizontal |
| 2 | 4874.000 | 47.22 | -0.77 | 46.45 | 74.00 | -27.55 | Peak | Horizontal |
| 3 | 7311.000 | 26.89 | 2.95 | 29.84 | 54.00 | -24.16 | Average | Horizontal |
| 4 | 7311.000 | 39.36 | 2.95 | 42.31 | 74.00 | -31.69 | Peak | Horizontal |
| 5 | 4874.000 | 30.90 | -0.77 | 30.13 | 54.00 | -23.87 | Average | Vertical |
| 6 | 4874.000 | 41.66 | -0.77 | 40.89 | 74.00 | -33.11 | Peak | Vertical |
| 7 | 7311.000 | 27.21 | 2.95 | 30.16 | 54.00 | -23.84 | Average | Vertical |
| 8 | 7311.000 | 39.99 | 2.95 | 42.94 | 74.00 | -31.06 | Peak | Vertical |
| IEEE 802.11ax-HE40_Channel 9: | | | | | | | | |
| 1 | 4904.000 | 31.80 | -0.74 | 31.06 | 54.00 | -22.94 | Average | Horizontal |
| 2 | 4904.000 | 45.16 | -0.74 | 44.42 | 74.00 | -29.58 | Peak | Horizontal |
| 3 | 7356.000 | 26.18 | 2.98 | 29.16 | 54.00 | -24.84 | Average | Horizontal |
| 4 | 7356.000 | 39.23 | 2.98 | 42.21 | 74.00 | -31.79 | Peak | Horizontal |
| 5 | 4904.000 | 22.94 | -0.74 | 22.20 | 54.00 | -31.80 | Average | Vertical |
| 6 | 4904.000 | 35.75 | -0.74 | 35.01 | 74.00 | -38.99 | Peak | Vertical |
| 7 | 7356.000 | 26.39 | 2.98 | 29.37 | 54.00 | -24.63 | Average | Vertical |
| 8 | 7356.000 | 37.77 | 2.98 | 40.75 | 74.00 | -33.25 | Peak | Vertical |

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

5.8 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2013 Clause 11.13

Limits:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

| Frequency | Limit (dBµV/m @3m) | Remark |
|-----------------|--------------------|------------------|
| 30 MHz-88 MHz | 40.0 | Quasi-peak Value |
| 88 MHz-216 MHz | 43.5 | Quasi-peak Value |
| 216 MHz-960 MHz | 46.0 | Quasi-peak Value |
| 960 MHz-1 GHz | 54.0 | Quasi-peak Value |
| Above 1 GHz | 54.0 | Average Value |
| | 74.0 | Peak Value |

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).



1. Use radiated spurious emission test procedure described in clause 5.7. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

IEEE 802.11b

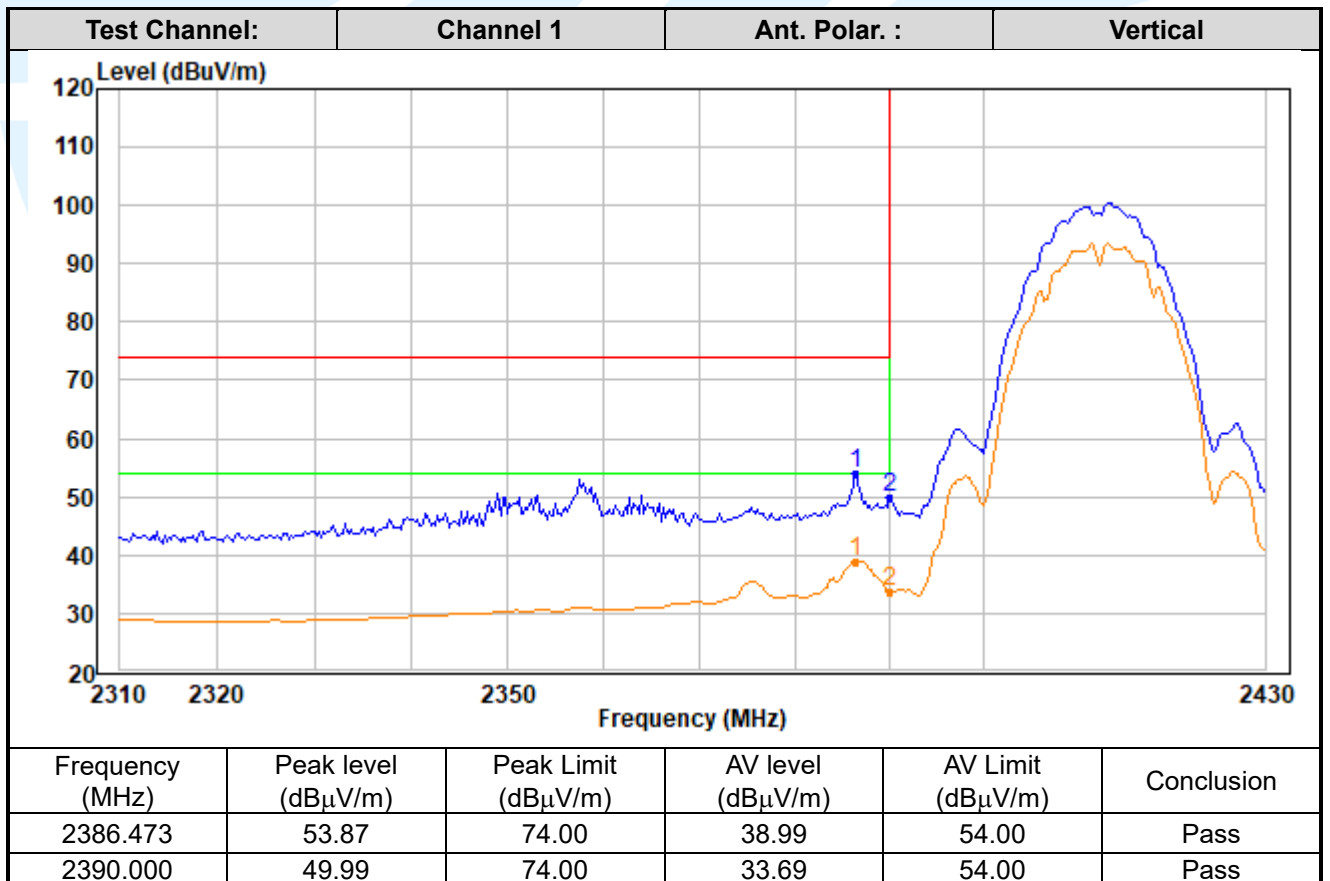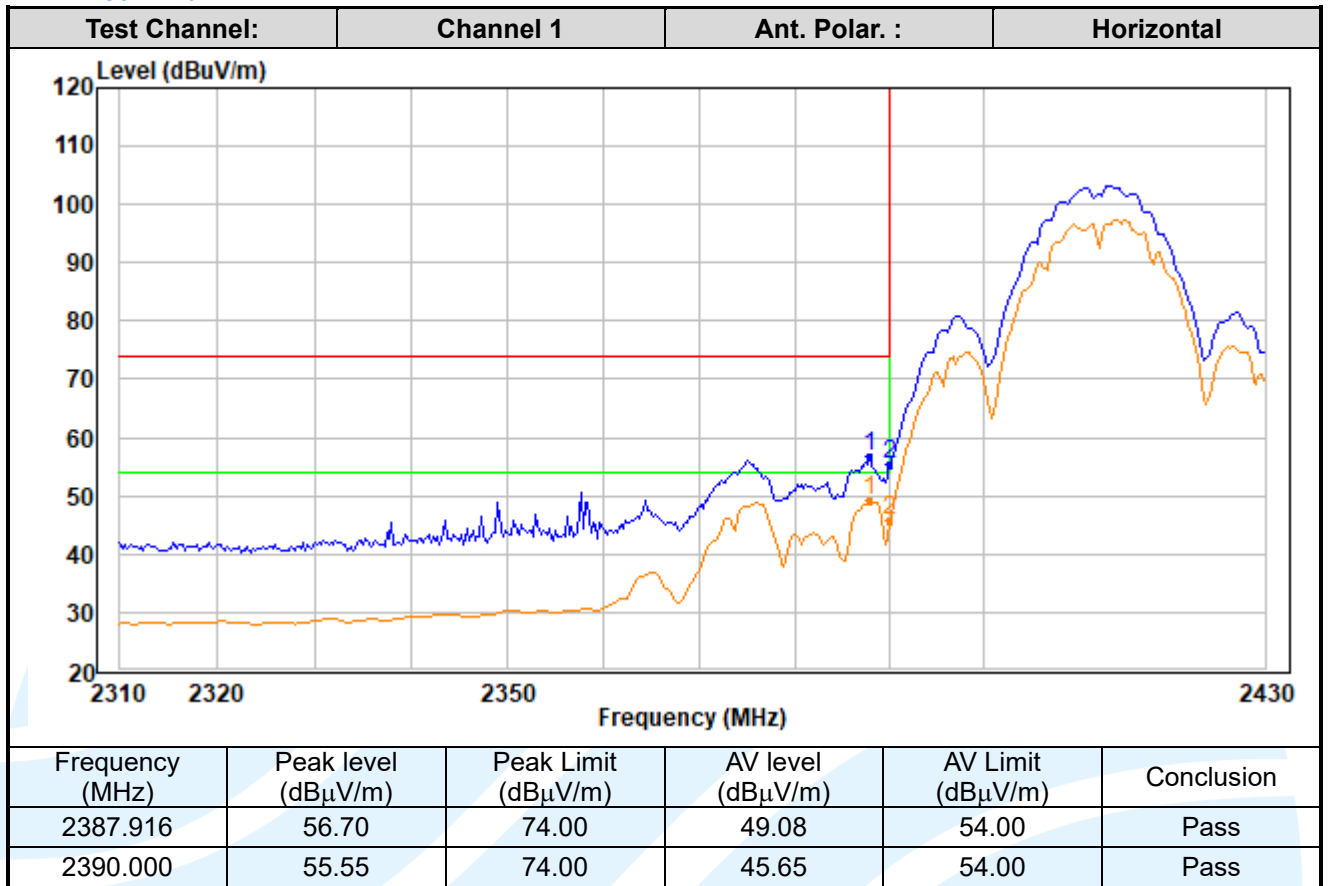

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

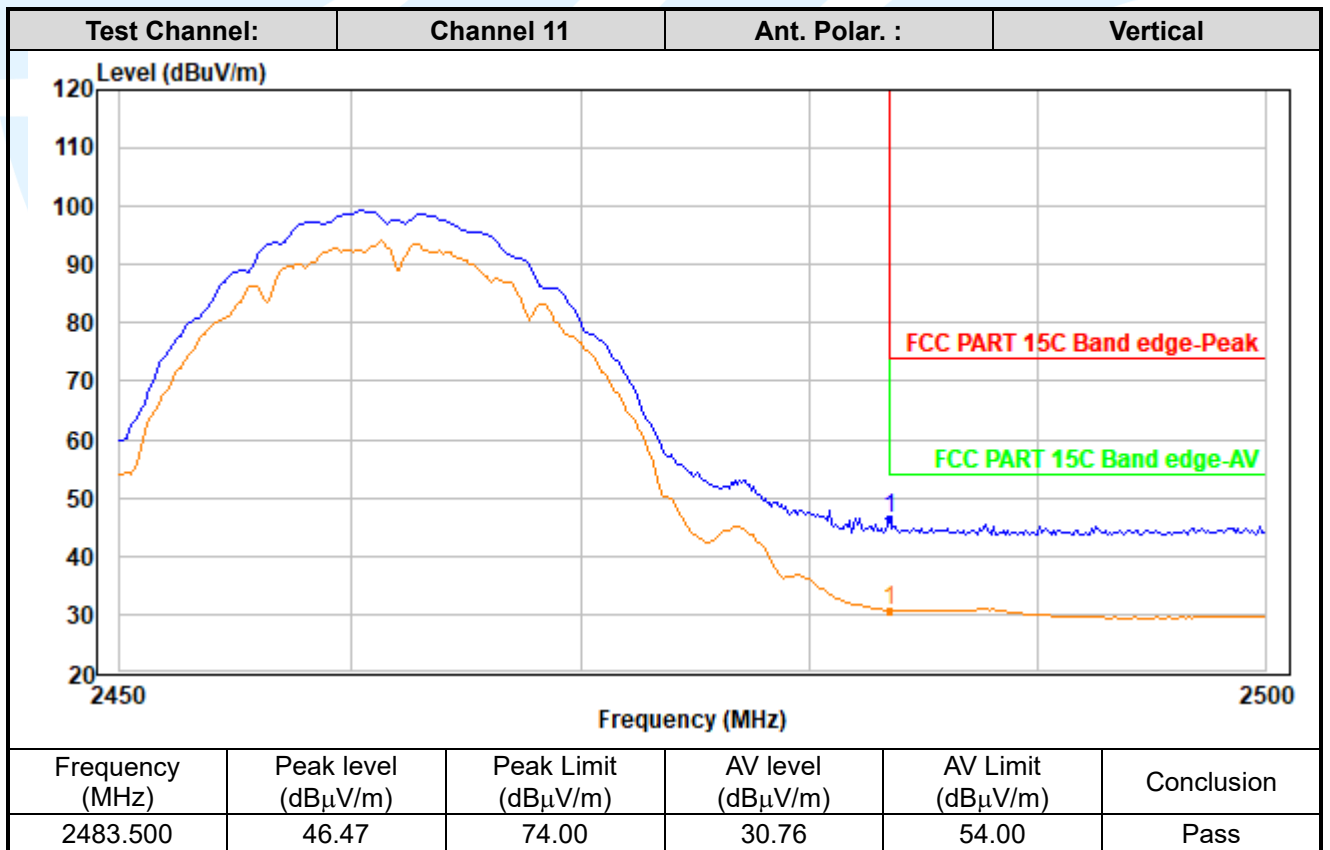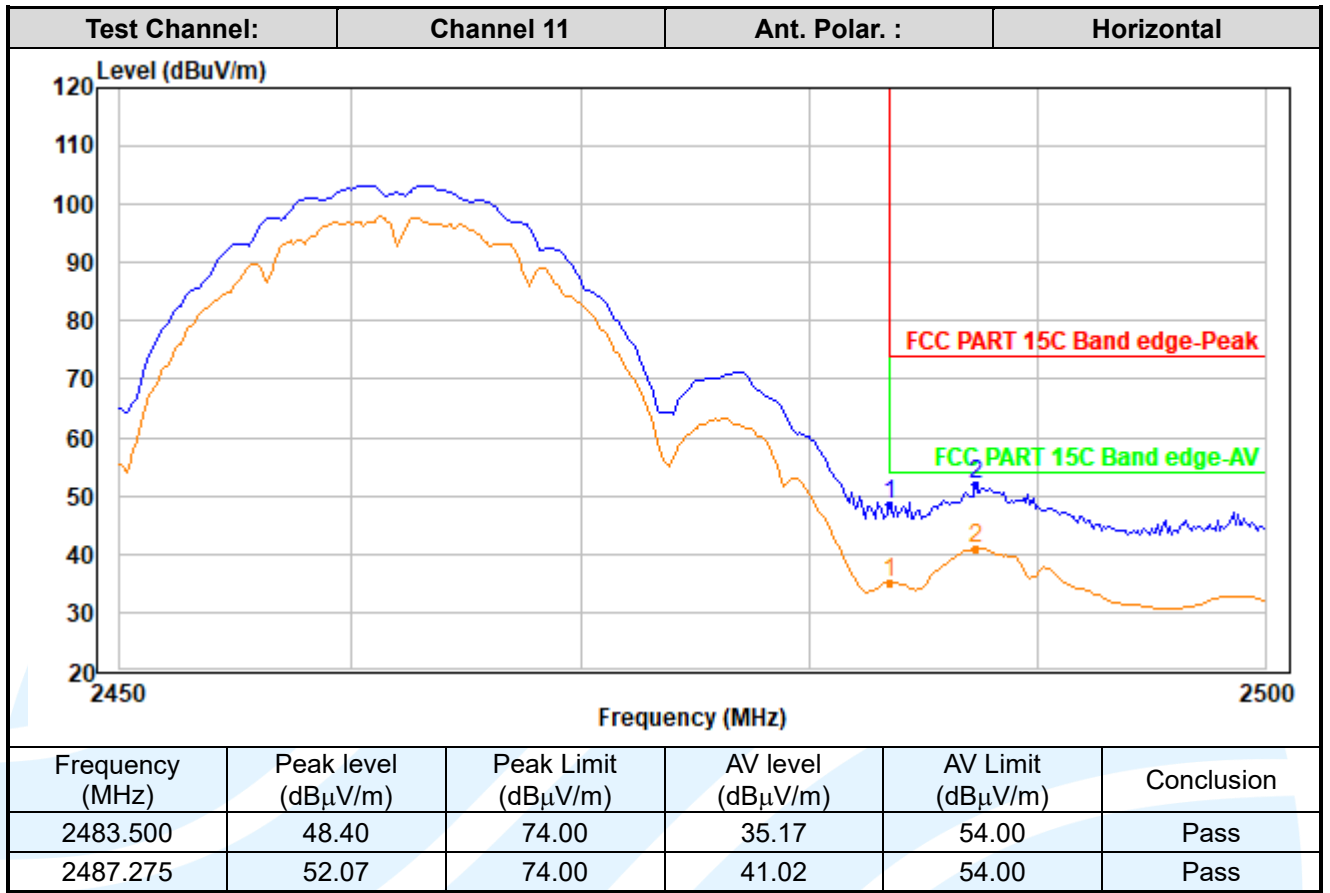

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

IEEE 802.11g

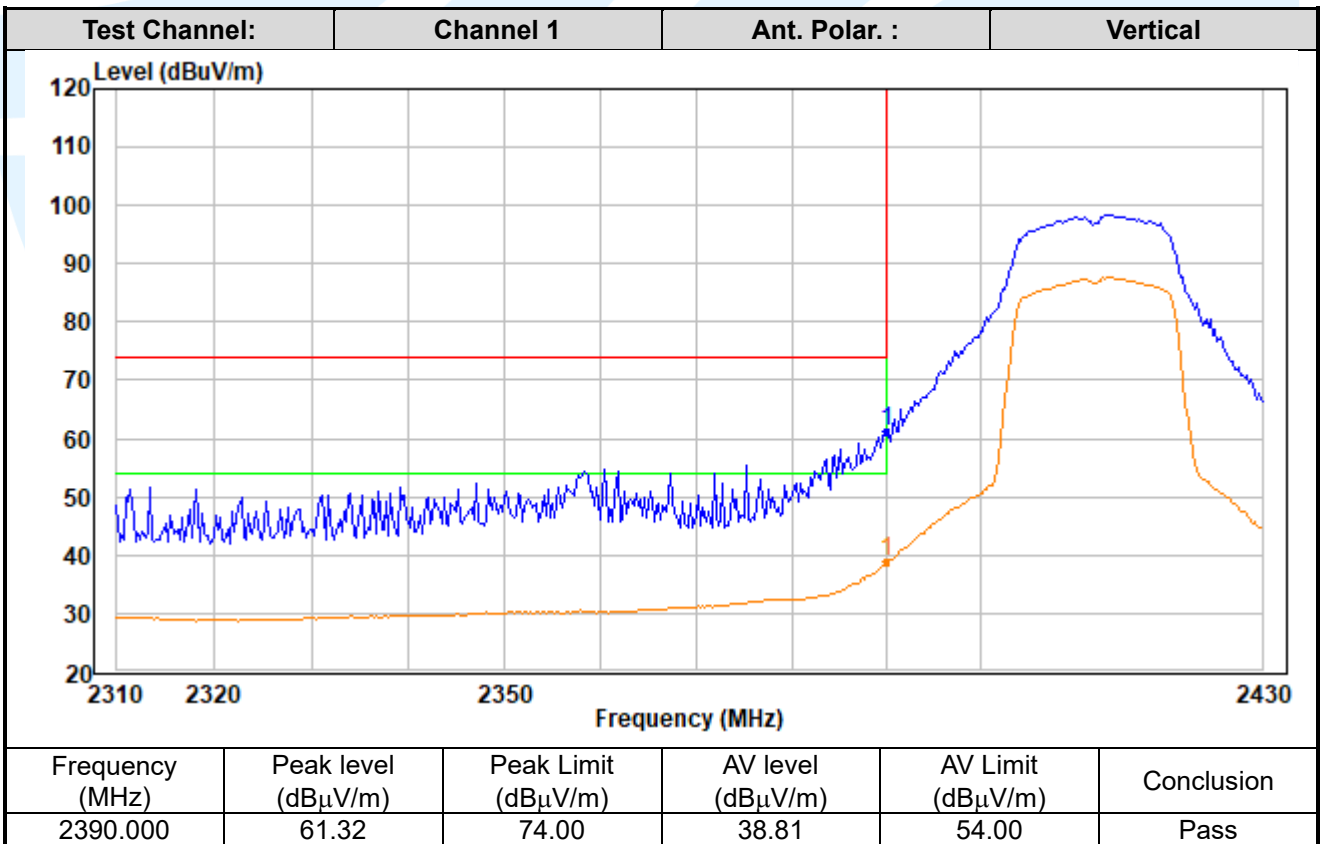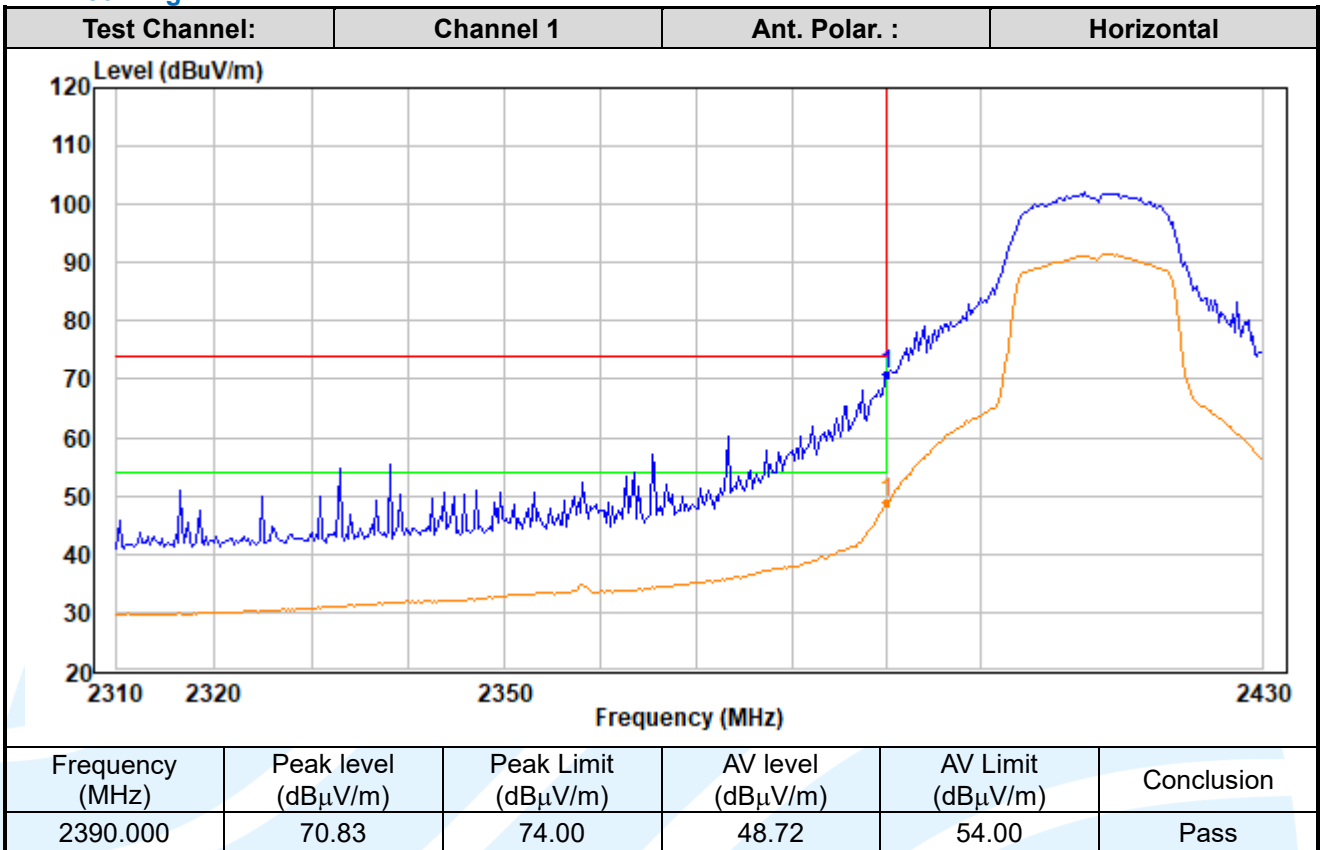

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

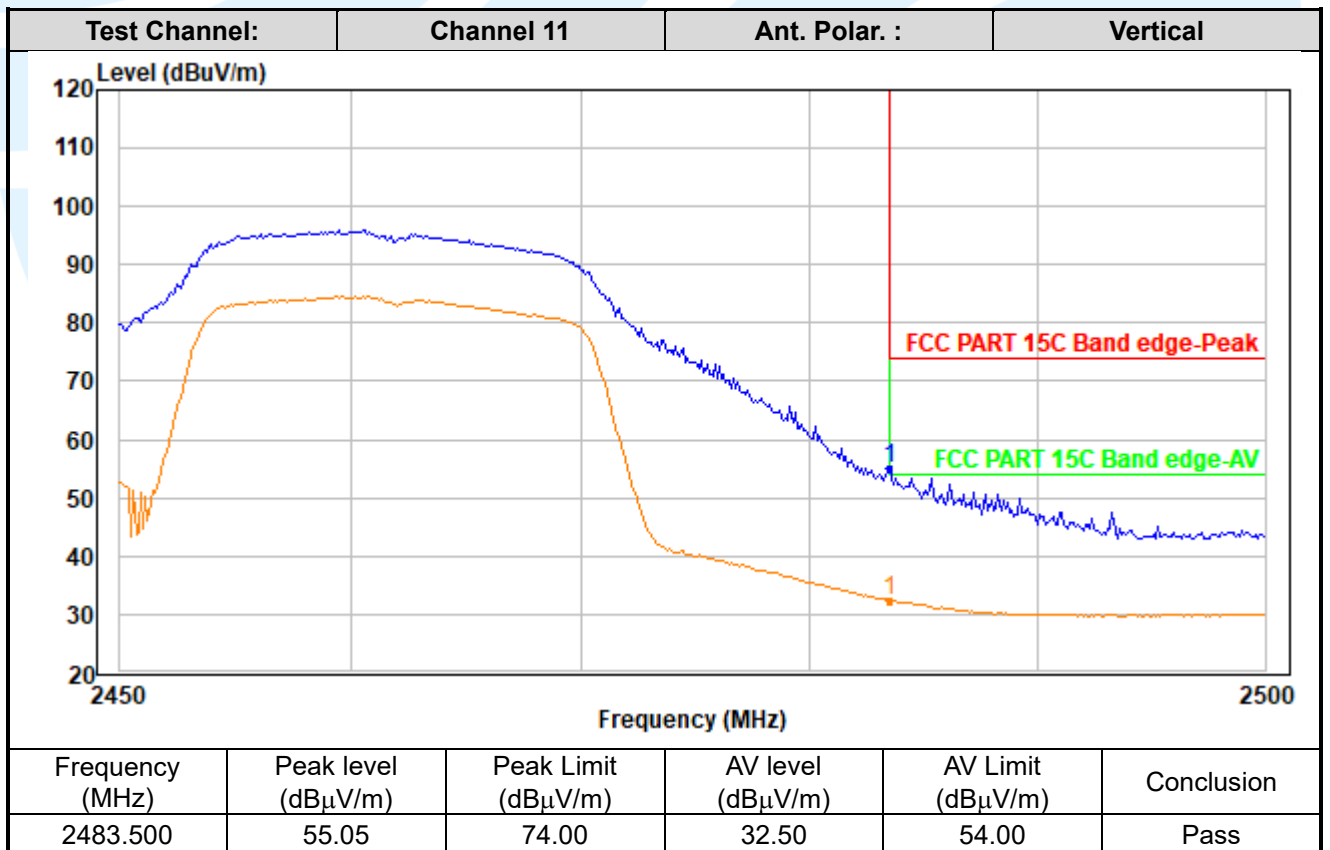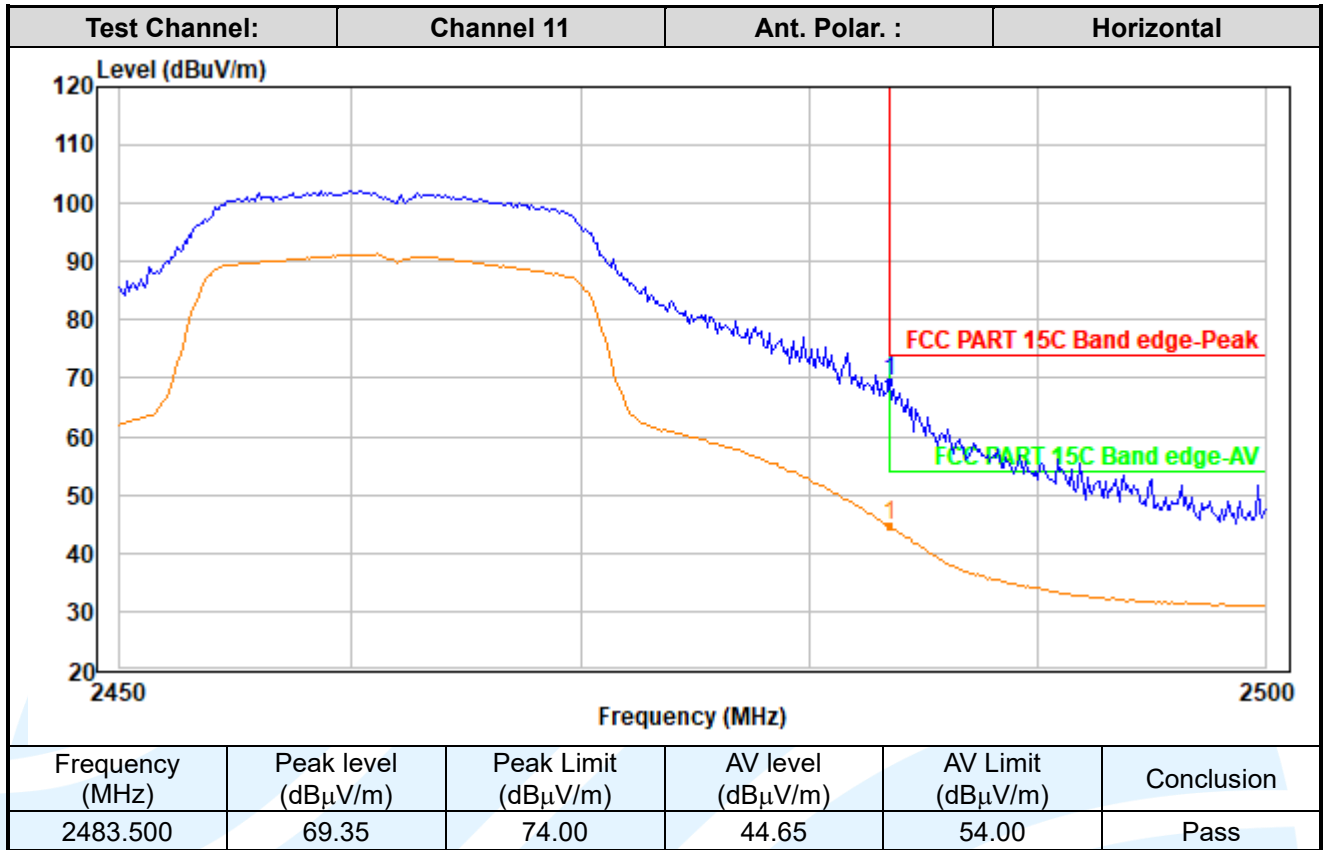

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

IEEE 802.11n-HT20

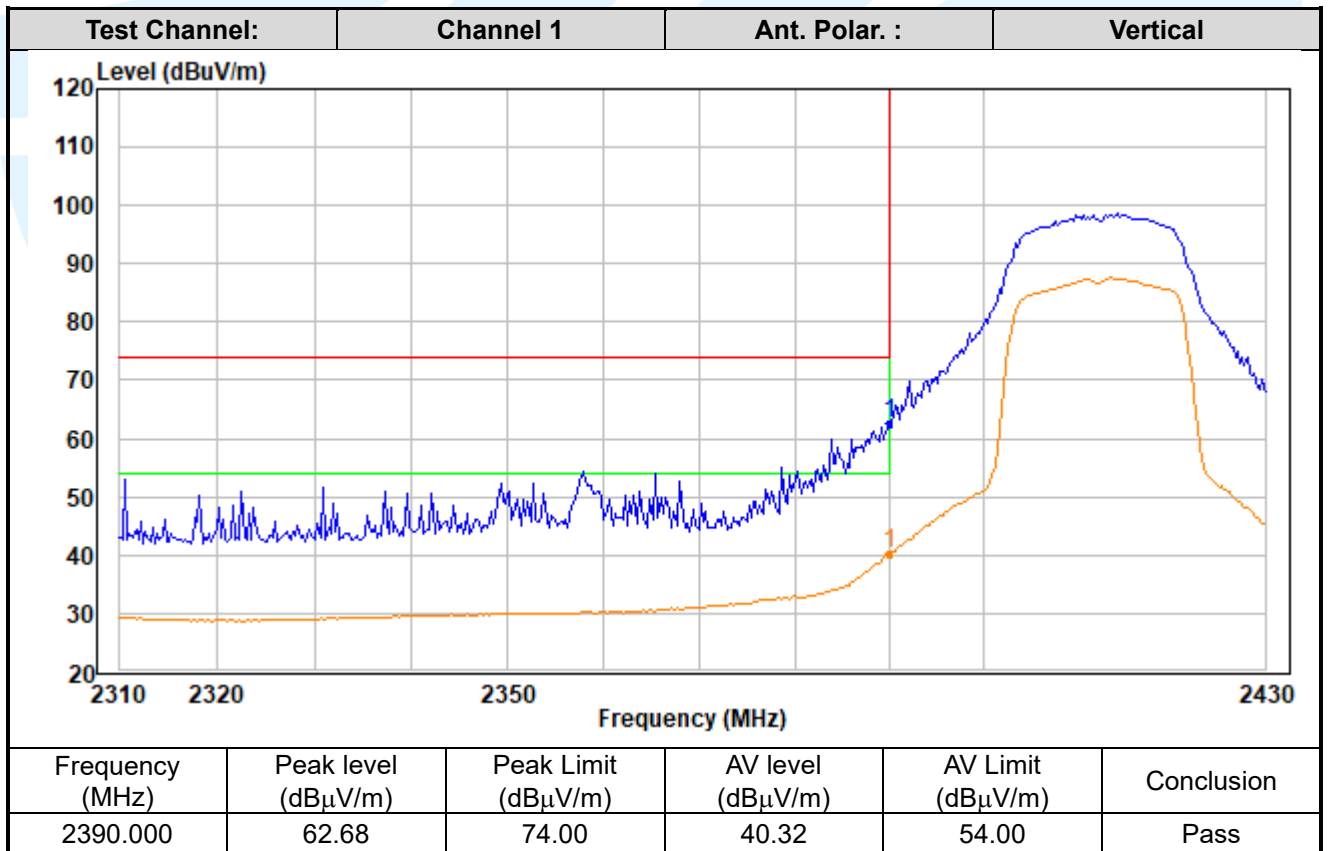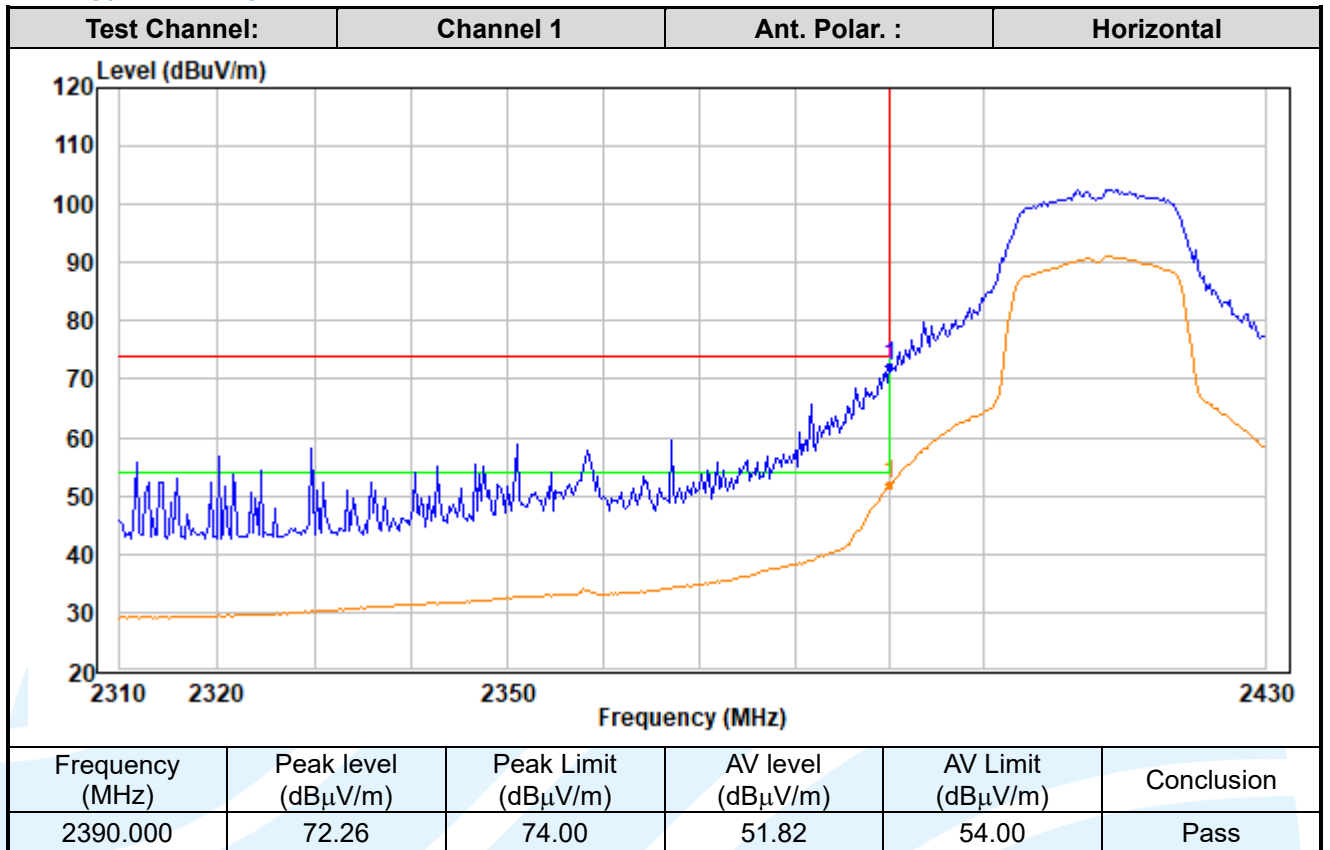

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

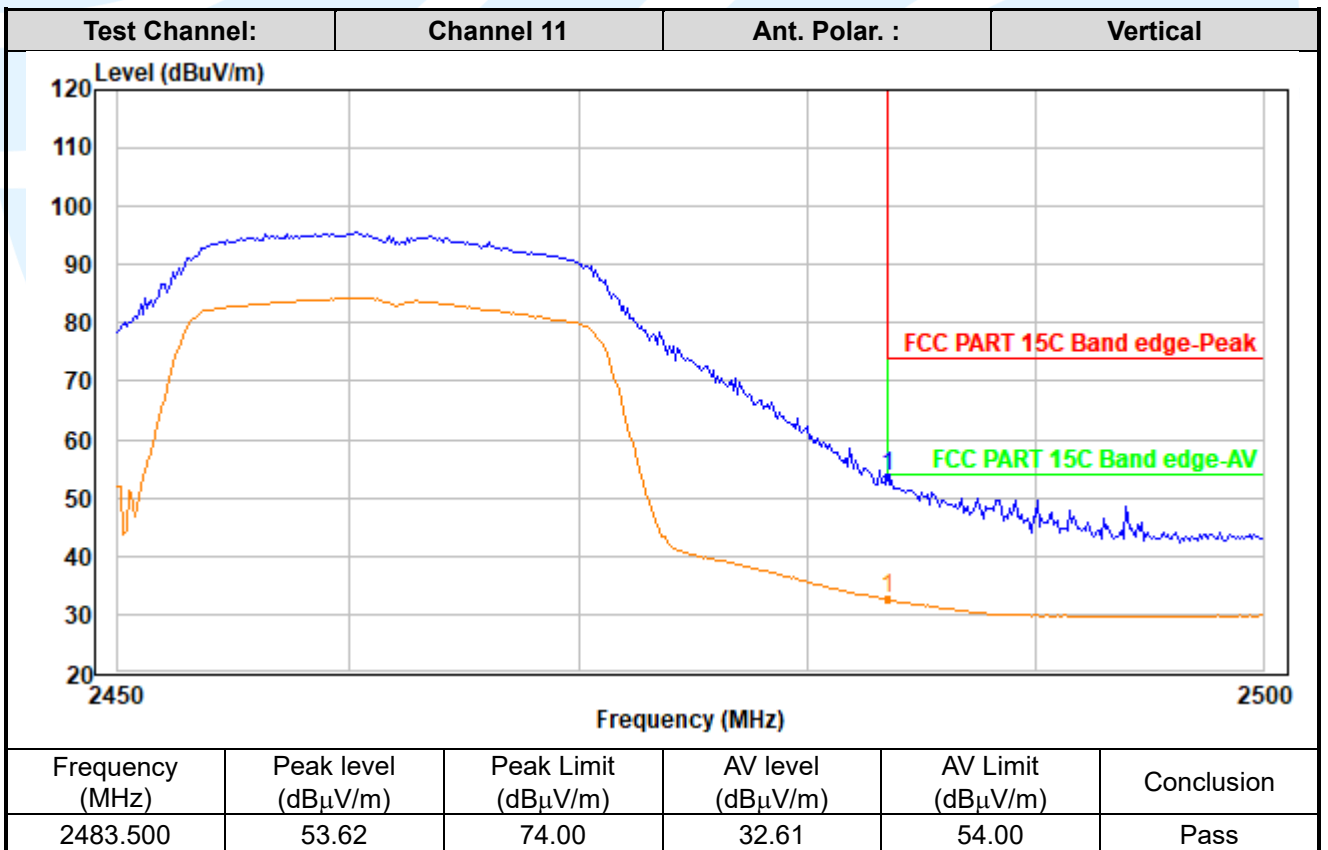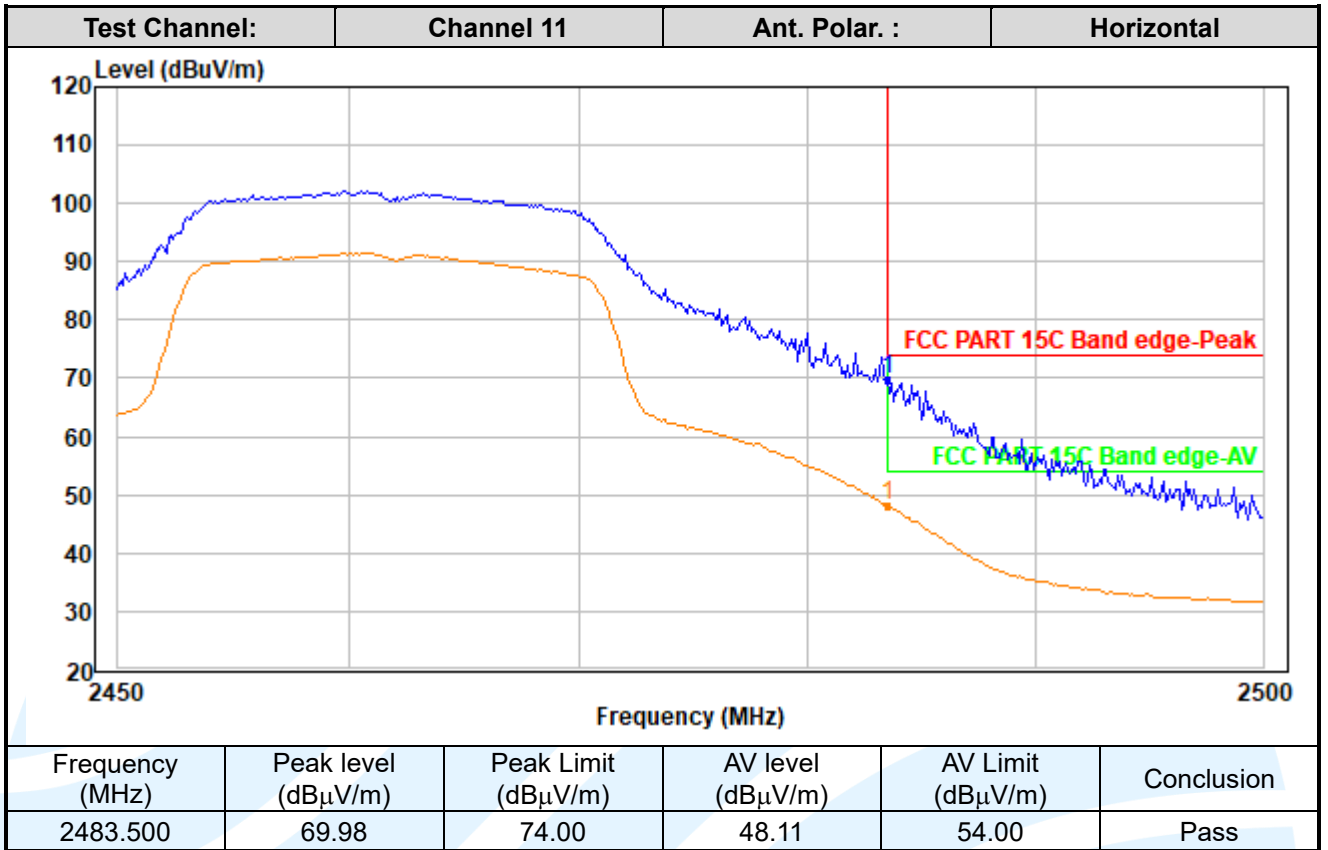

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

IEEE 802.11n-HT40

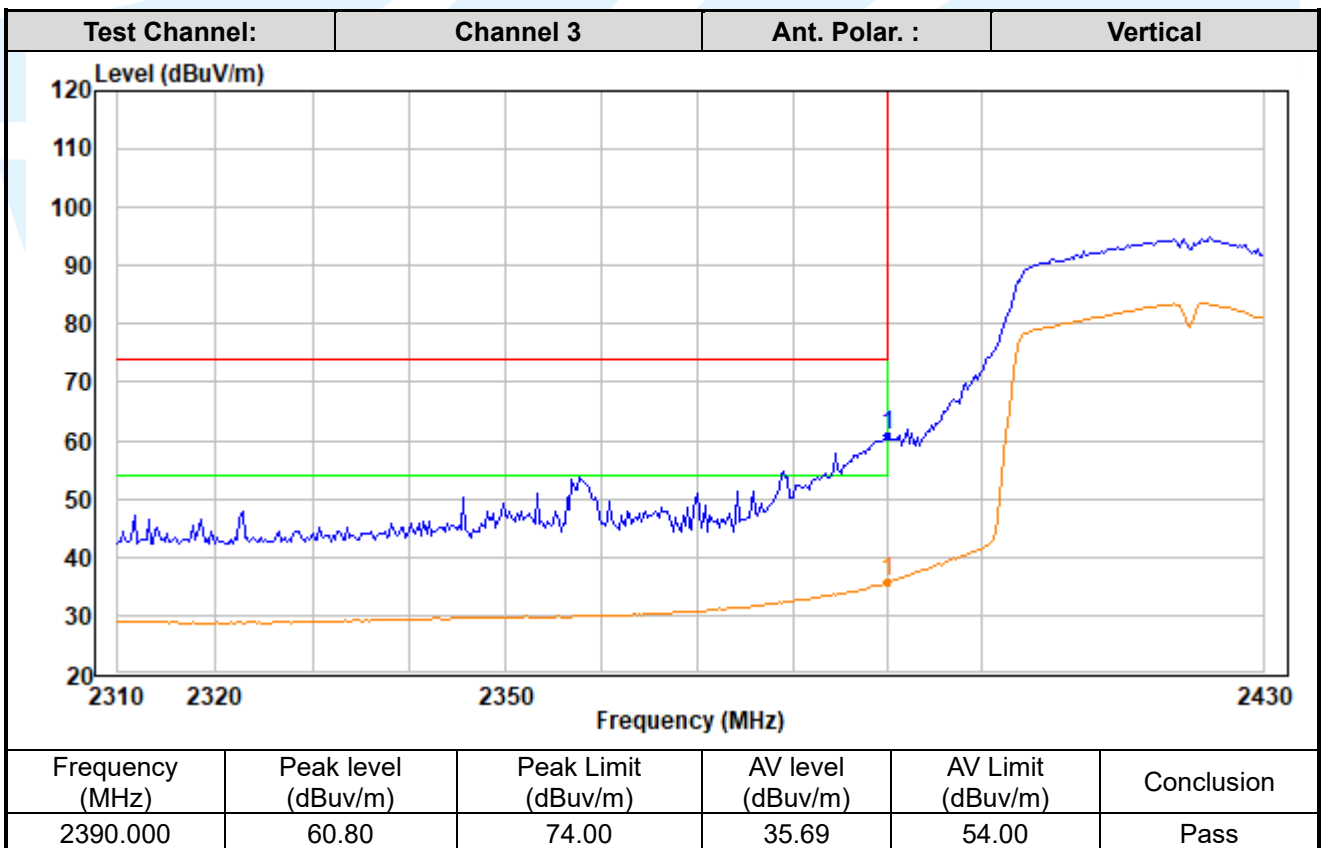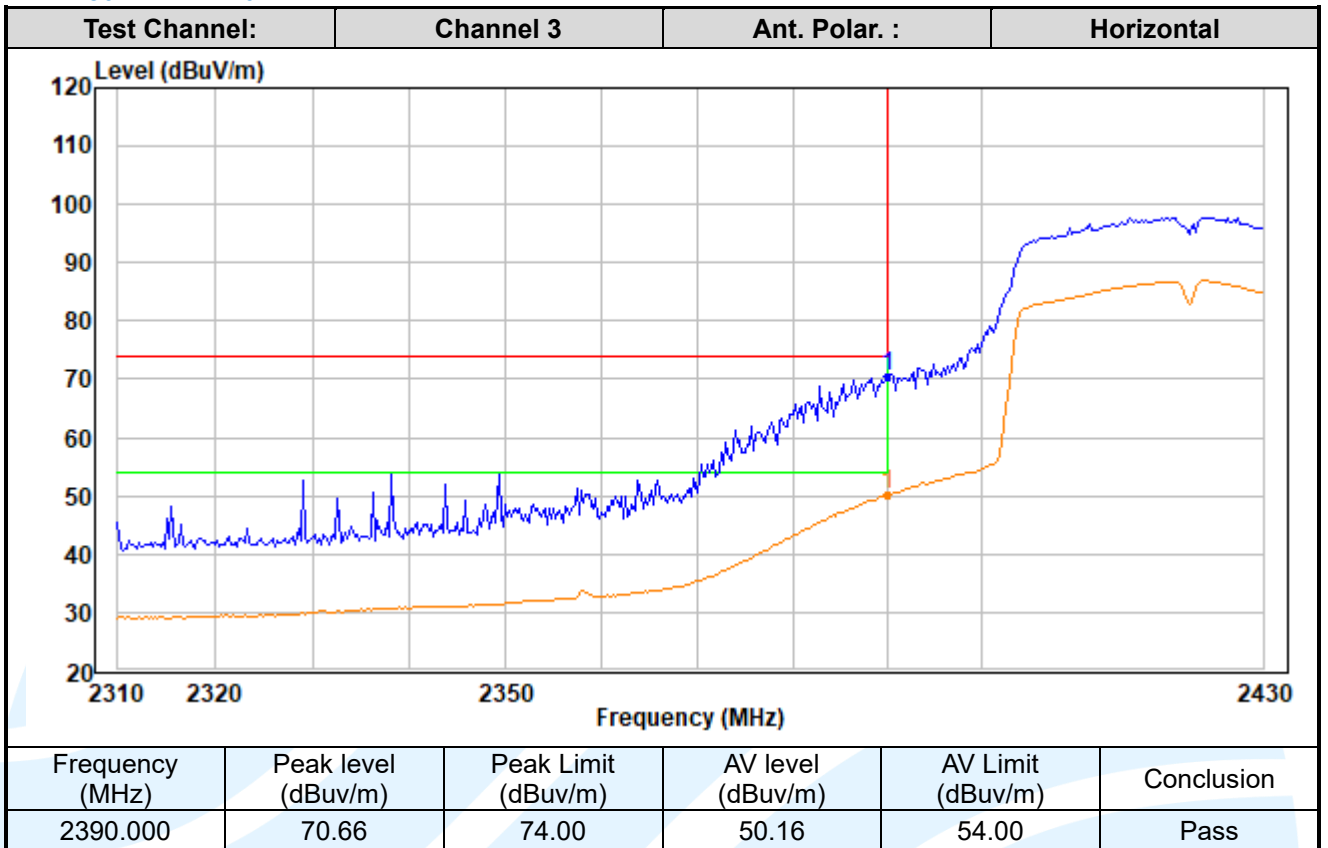

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

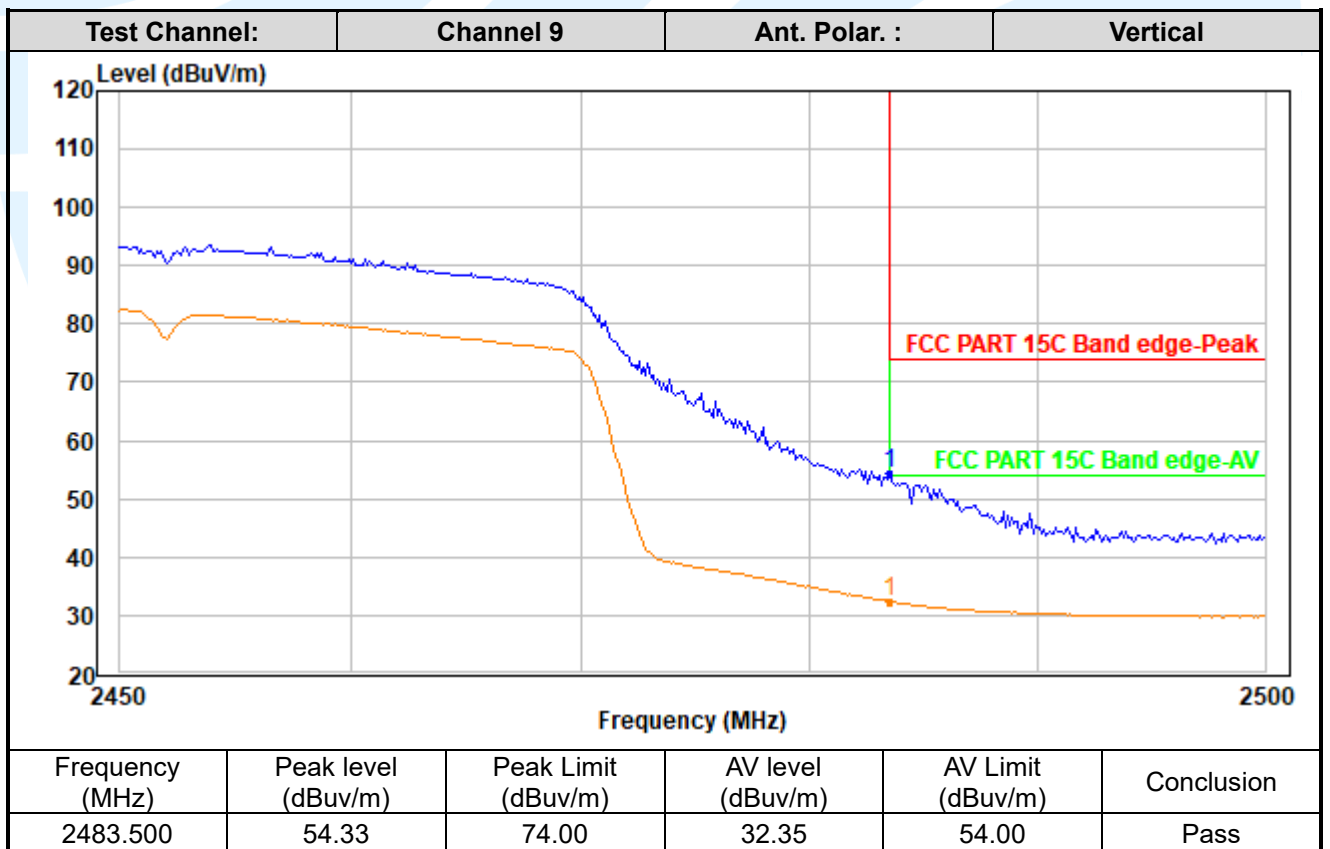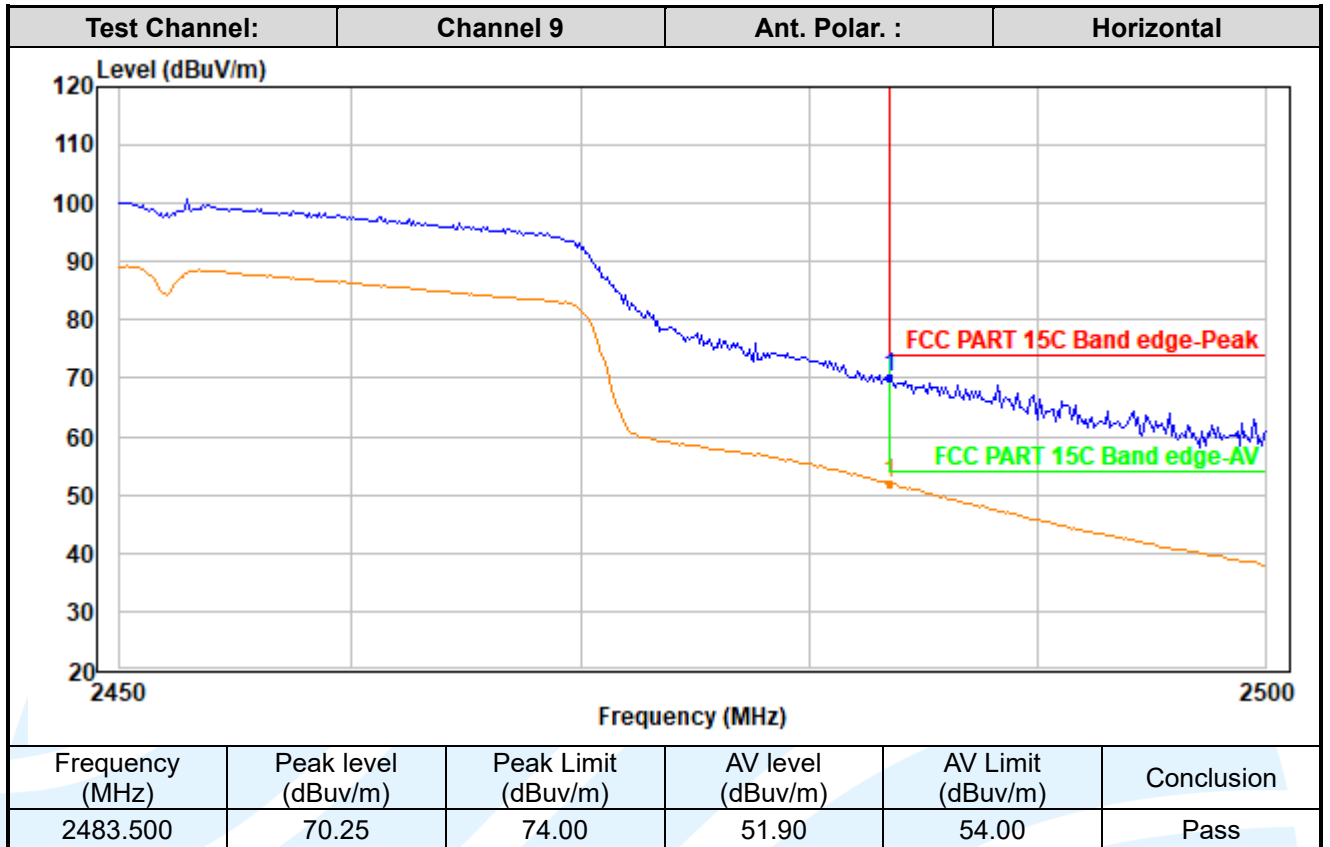

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

IEEE 802.11ax-HE20

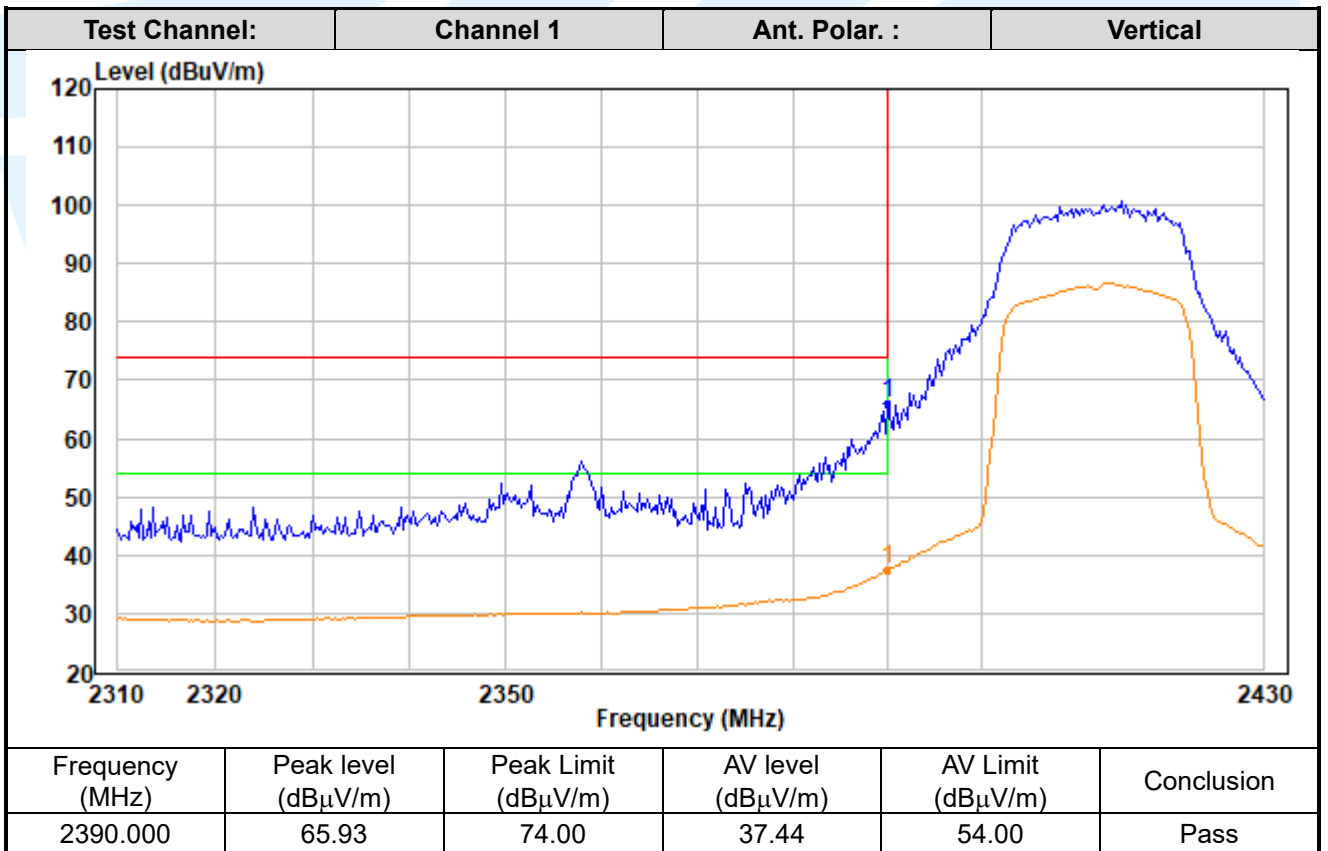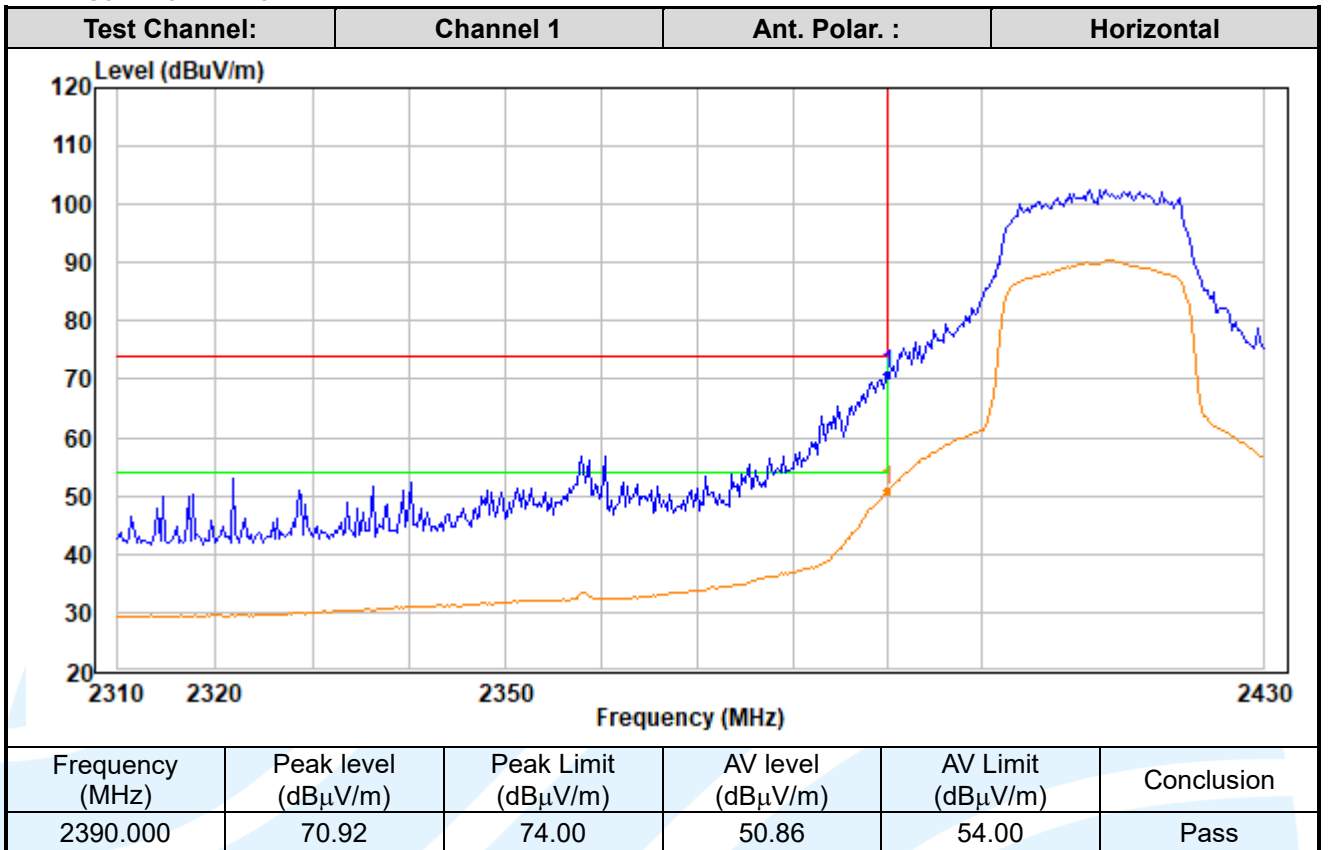

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

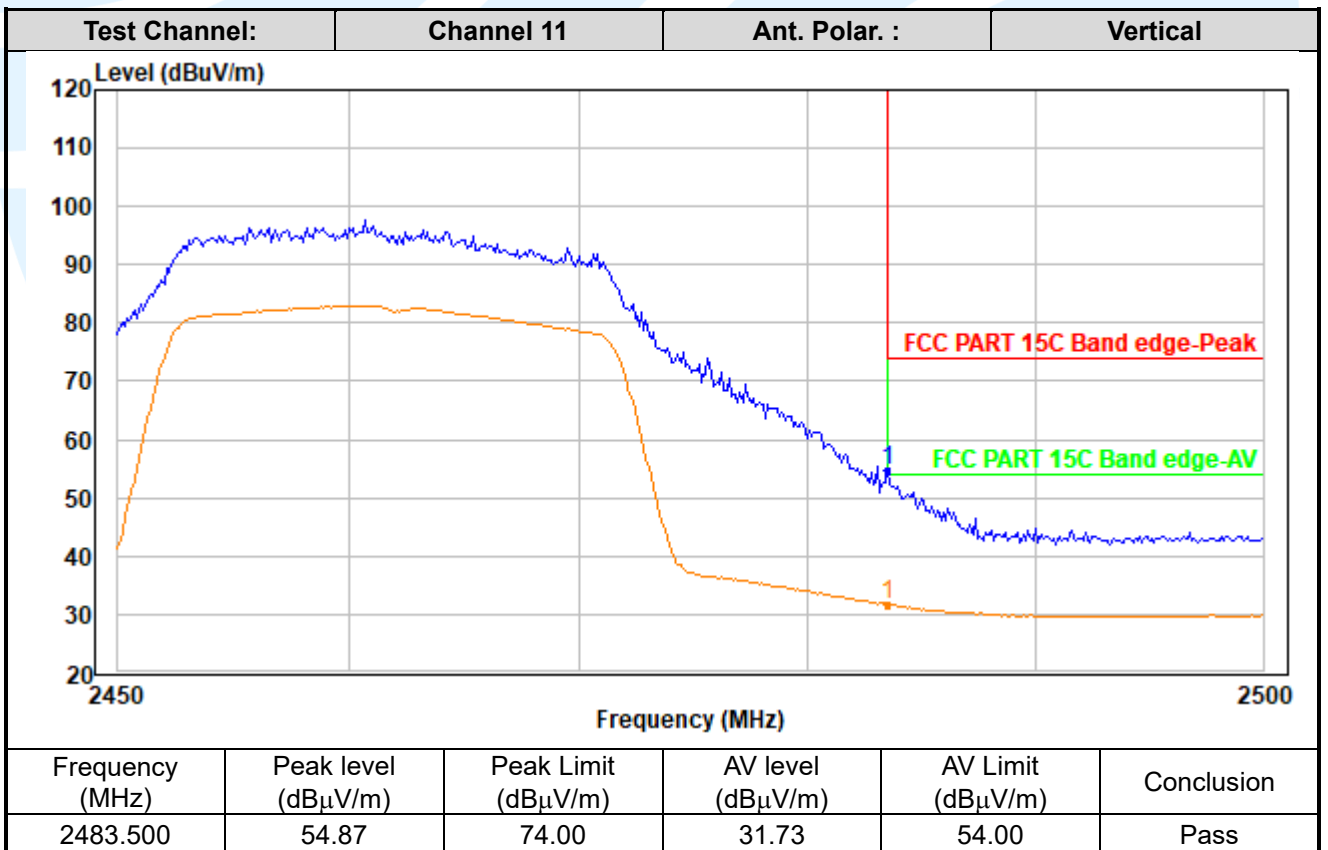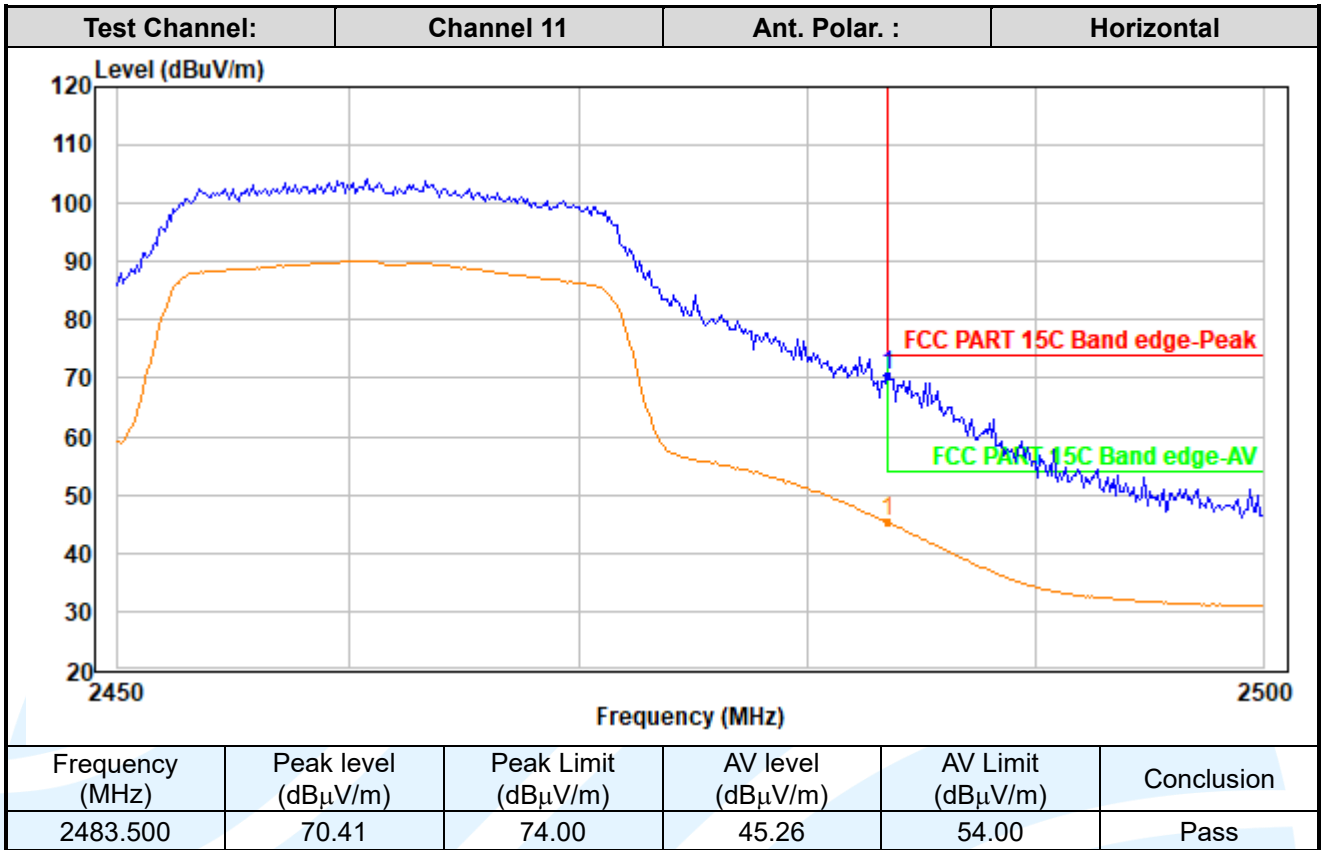

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

IEEE 802.11ax-HE40

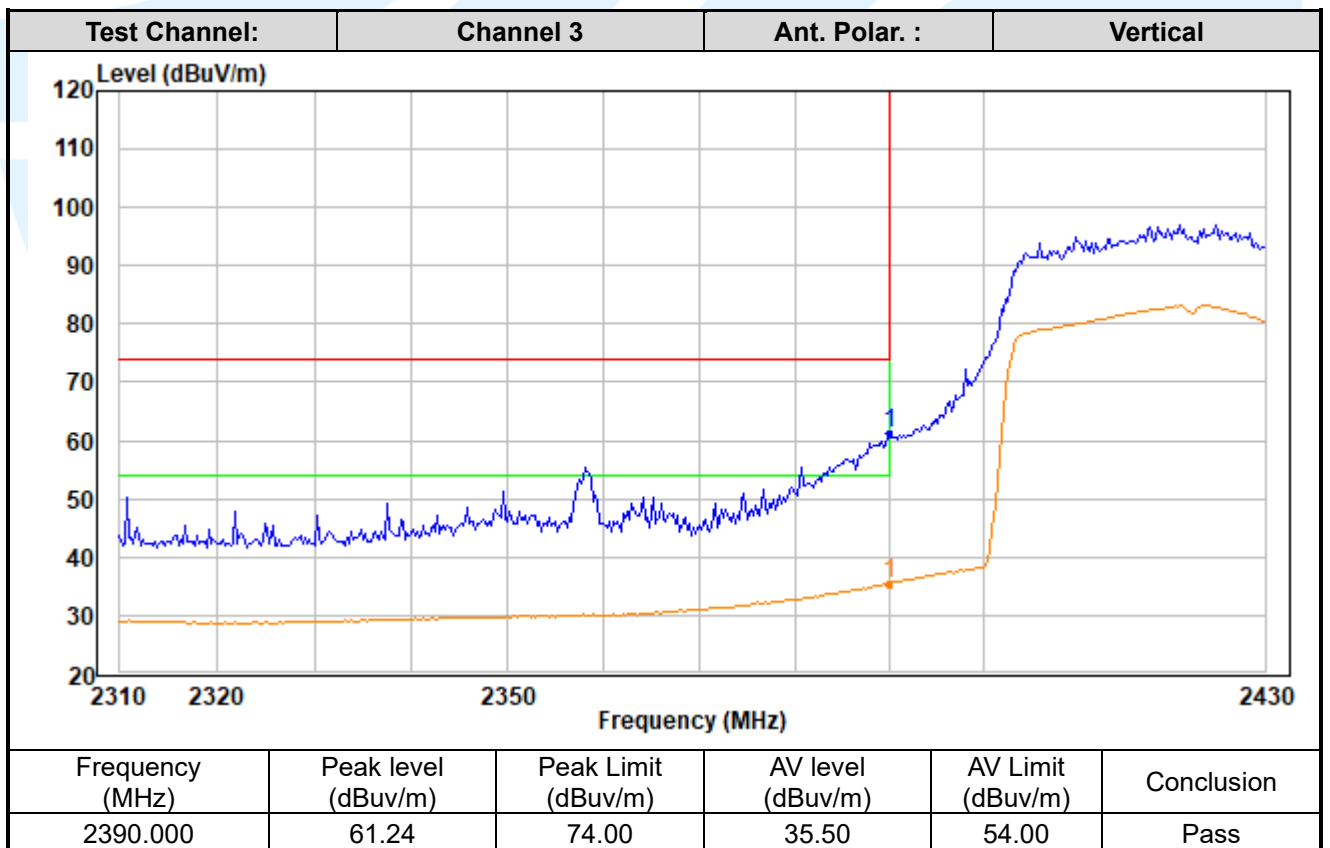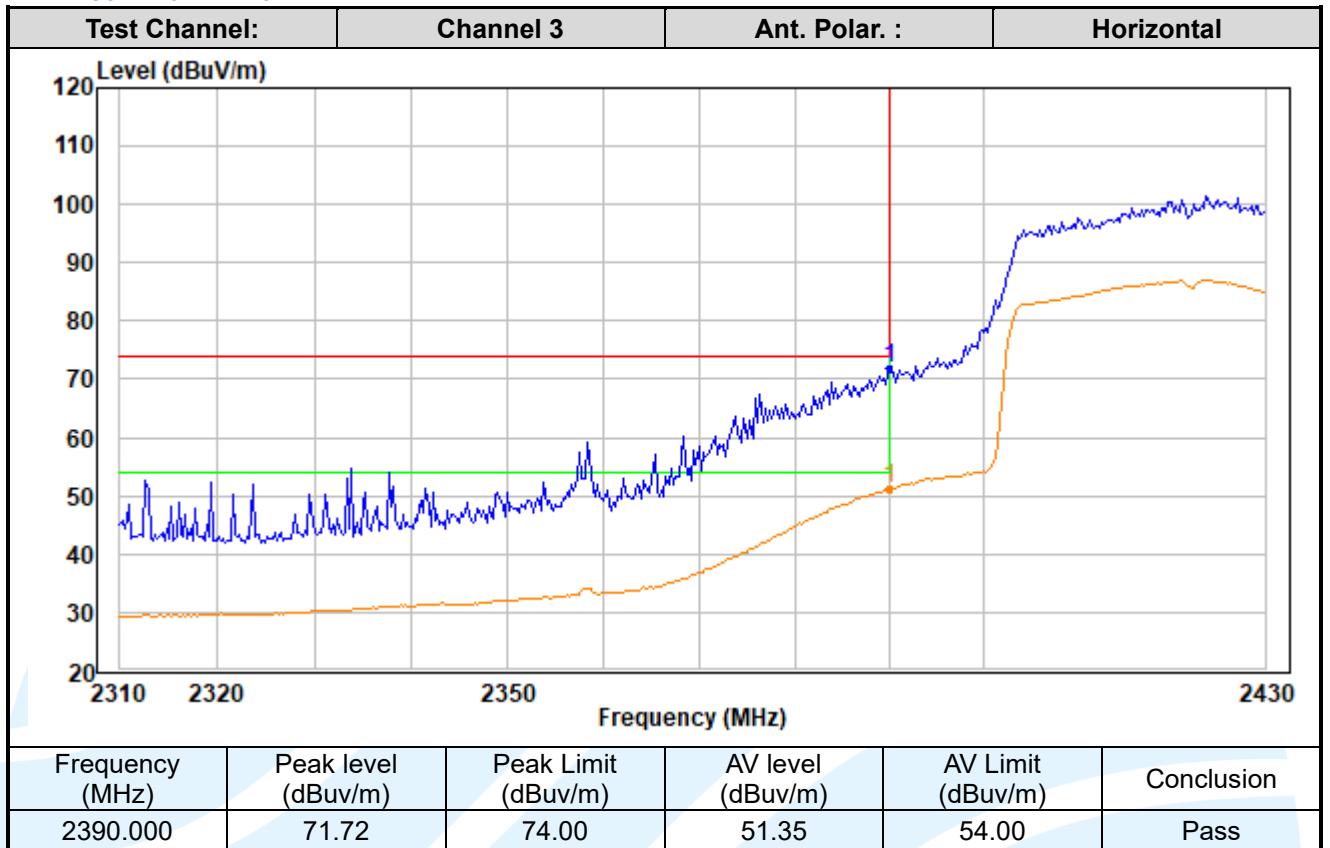

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

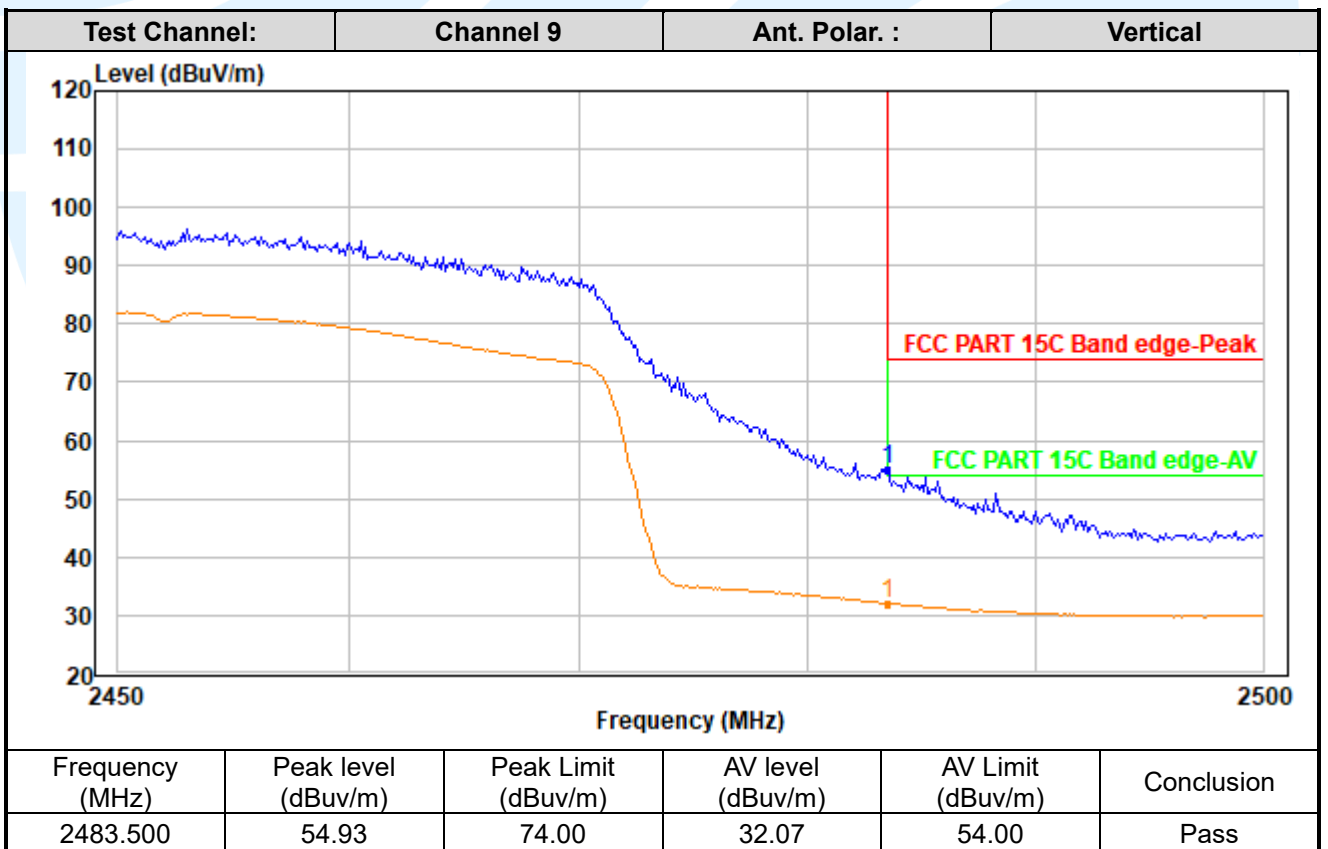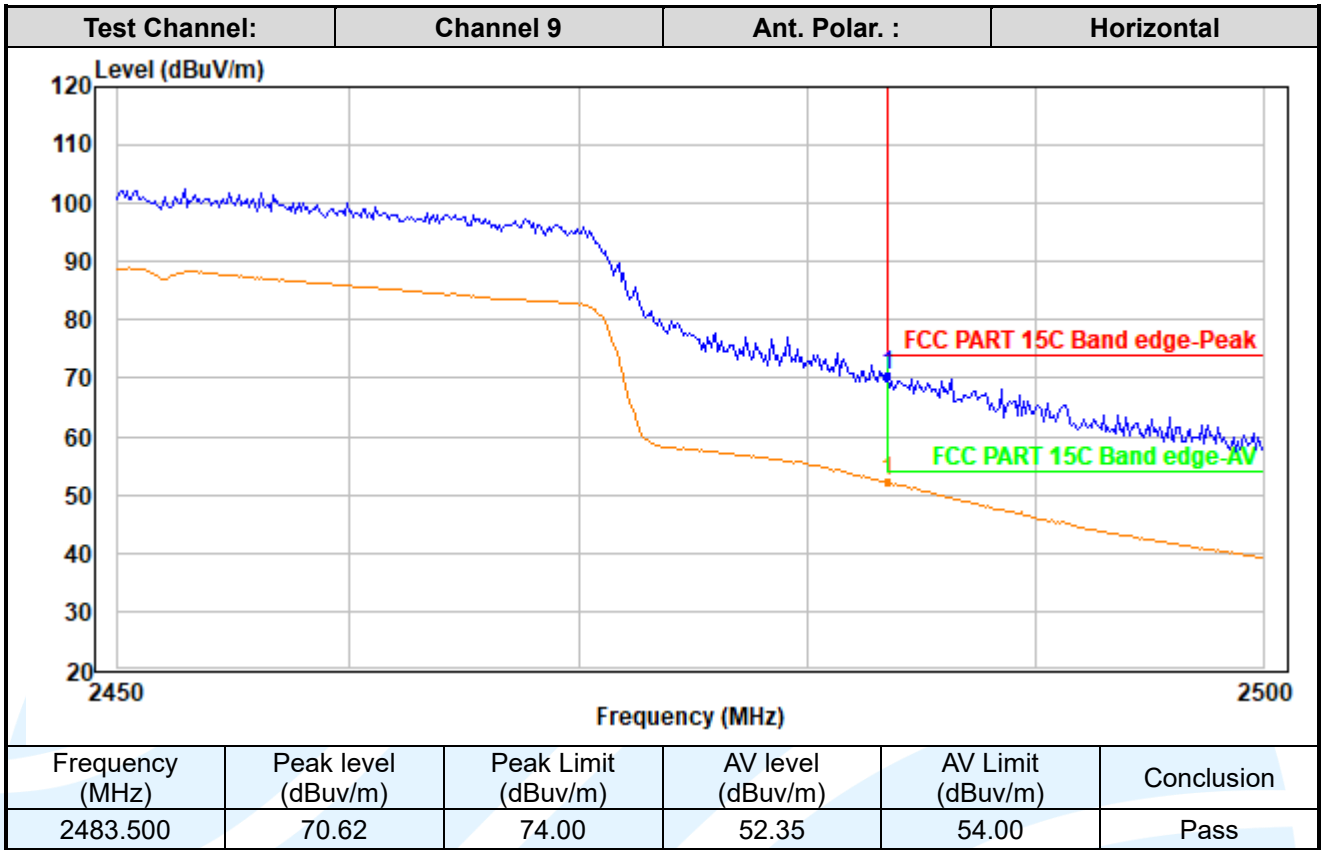

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

5.9 CONDUCTED EMISSION

Test Requirement: 47 CFR Part 15C Section 15.207

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

| Frequency range (MHz) | Limits (dB(μV)) | |
|-----------------------|-----------------|----------|
| | Quasi-peak | Average |
| 0,15 to 0,50 | 66 to 56 | 56 to 46 |
| 0,50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.5.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The worst measurement data as follows:
Quasi Peak and Average:
Mode: WIFI Link

Live Line

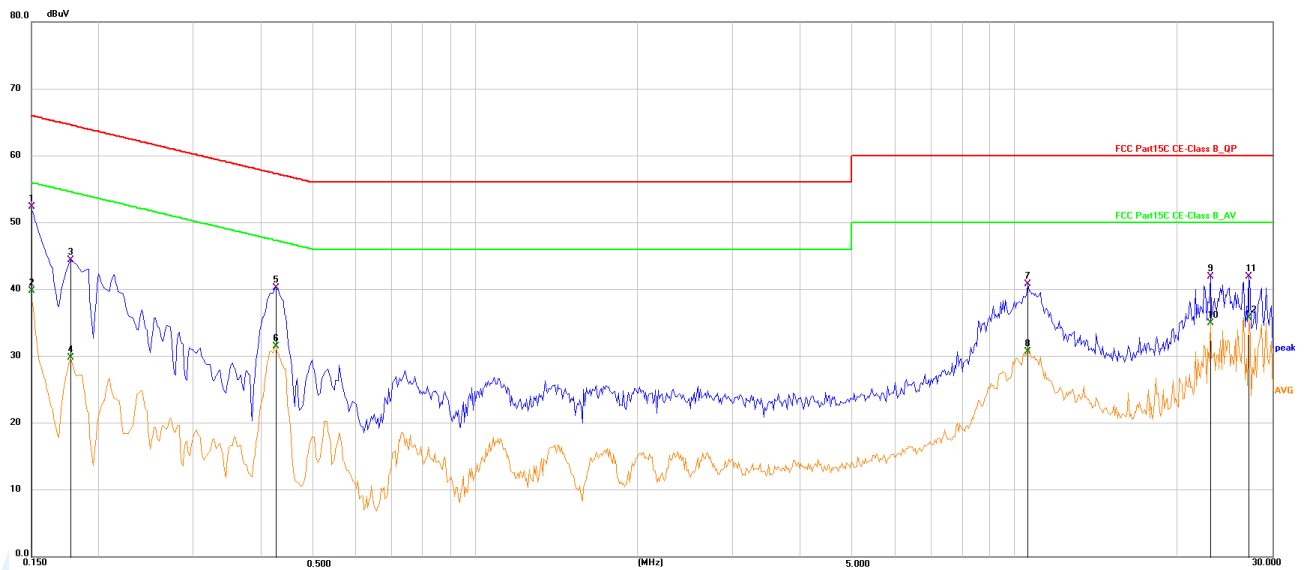

| No. | Frequency (MHz) | Reading (dBμV) | Correction factor (dB) | Result (dBμV) | Limit (dBμV) | Margin (dB) | Detector |
|-----|-----------------|----------------|------------------------|---------------|--------------|-------------|----------|
| 1 | 0.1500 | 42.09 | 10.20 | 52.29 | 66.00 | -13.71 | QP |
| 2 | 0.1500 | 29.56 | 10.20 | 39.76 | 56.00 | -16.24 | AVG |
| 3 | 0.1770 | 34.20 | 10.18 | 44.38 | 64.63 | -20.25 | QP |
| 4 | 0.1770 | 19.61 | 10.18 | 29.79 | 54.63 | -24.84 | AVG |
| 5 | 0.4244 | 30.11 | 10.14 | 40.25 | 57.36 | -17.11 | QP |
| 6 | 0.4244 | 21.34 | 10.14 | 31.48 | 47.36 | -15.88 | AVG |
| 7 | 10.6035 | 30.36 | 10.48 | 40.84 | 60.00 | -19.16 | QP |
| 8 | 10.6035 | 20.24 | 10.48 | 30.72 | 50.00 | -19.28 | AVG |
| 9 | 23.1270 | 31.15 | 10.81 | 41.96 | 60.00 | -18.04 | QP |
| 10 | 23.1270 | 24.10 | 10.81 | 34.91 | 50.00 | -15.09 | AVG |
| 11 | 27.1590 | 31.07 | 10.87 | 41.94 | 60.00 | -18.06 | QP |
| 12 | 27.1590 | 24.82 | 10.87 | 35.69 | 50.00 | -14.31 | AVG |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

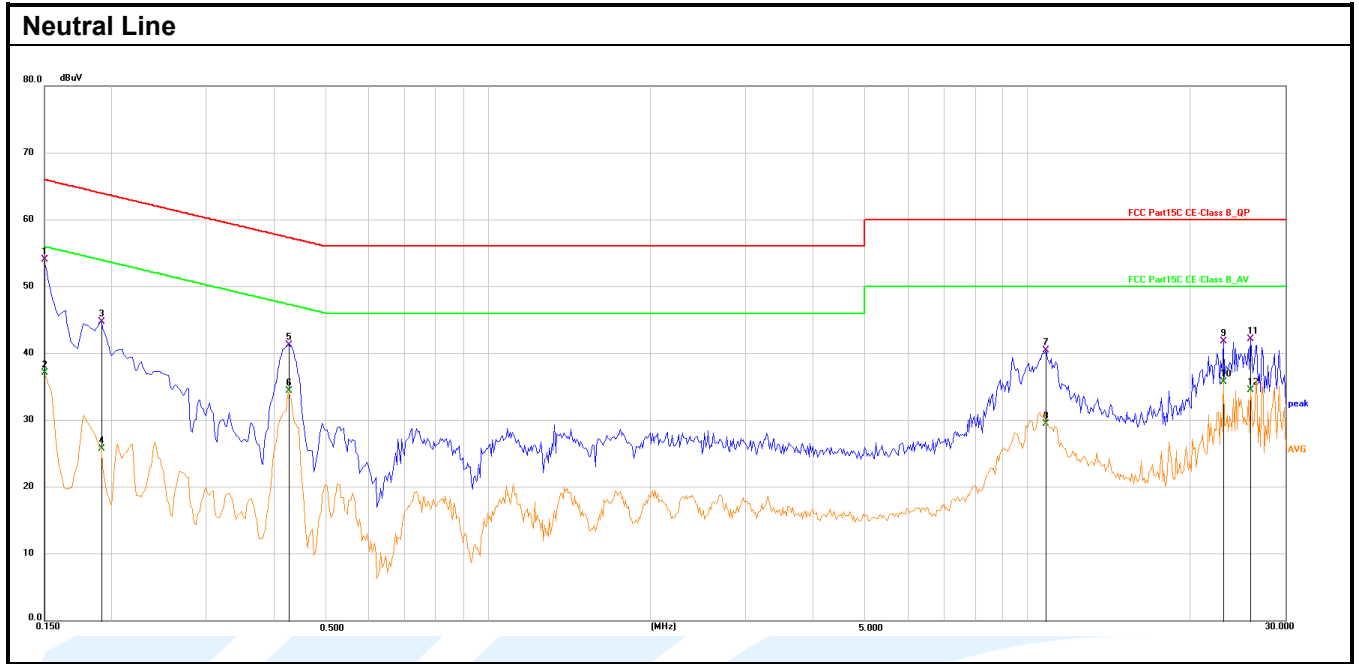

| No. | Frequency (MHz) | Reading (dBµV) | Correction factor (dB) | Result (dBµV) | Limit (dBµV) | Margin (dB) | Detector |
|-----|-----------------|----------------|------------------------|---------------|--------------|-------------|----------|
| 1 | 0.1500 | 43.86 | 10.19 | 54.05 | 66.00 | -11.95 | QP |
| 2 | 0.1500 | 26.89 | 10.19 | 37.08 | 56.00 | -18.92 | AVG |
| 3 | 0.1914 | 34.68 | 10.07 | 44.75 | 63.98 | -19.23 | QP |
| 4 | 0.1914 | 15.70 | 10.07 | 25.77 | 53.98 | -28.21 | AVG |
| 5 | 0.4260 | 31.02 | 10.21 | 41.23 | 57.33 | -16.10 | QP |
| 6 | 0.4260 | 24.16 | 10.21 | 34.37 | 47.33 | -12.96 | AVG |
| 7 | 10.7900 | 30.05 | 10.44 | 40.49 | 60.00 | -19.51 | QP |
| 8 | 10.7900 | 19.04 | 10.44 | 29.48 | 50.00 | -20.52 | AVG |
| 9 | 23.0181 | 31.07 | 10.77 | 41.84 | 60.00 | -18.16 | QP |
| 10 | 23.0181 | 25.02 | 10.77 | 35.79 | 50.00 | -14.21 | AVG |
| 11 | 25.8638 | 31.31 | 10.81 | 42.12 | 60.00 | -17.88 | QP |
| 12 | 25.8638 | 23.70 | 10.81 | 34.51 | 50.00 | -15.49 | AVG |

Remark:


1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

APPENDIX A RF TEST DATA

A.1 99% BANDWIDTH

| Mode | Channel | RU & Index | Ant. | 99% BW (MHz) | | |
|------------------|---------|------------|------|--------------|---|--------|
| IEEE 802.11b | 1 | N/A | 0 | 15.298 | | |
| | 6 | | | 15.289 | | |
| | 11 | | | 15.235 | | |
| IEEE 802.11g | 1 | | | 18.823 | | |
| | 6 | | | 18.136 | | |
| | 11 | | | 17.463 | | |
| IEEE 802.11n_20 | 1 | | | SU | 0 | 19.503 |
| | 6 | | | | | 18.855 |
| | 11 | | | | | 18.359 |
| IEEE 802.11n_40 | 3 | | | | | 37.274 |
| | 6 | | | | | 37.173 |
| | 9 | | | | | 37.010 |
| IEEE 802.11ax_20 | 1 | 19.422 | | | | |
| | 6 | 19.139 | | | | |
| | 11 | 19.071 | | | | |
| IEEE 802.11ax_40 | 3 | 38.285 | | | | |
| | 6 | 38.090 | | | | |
| | 9 | 38.057 | | | | |

Test Graphs

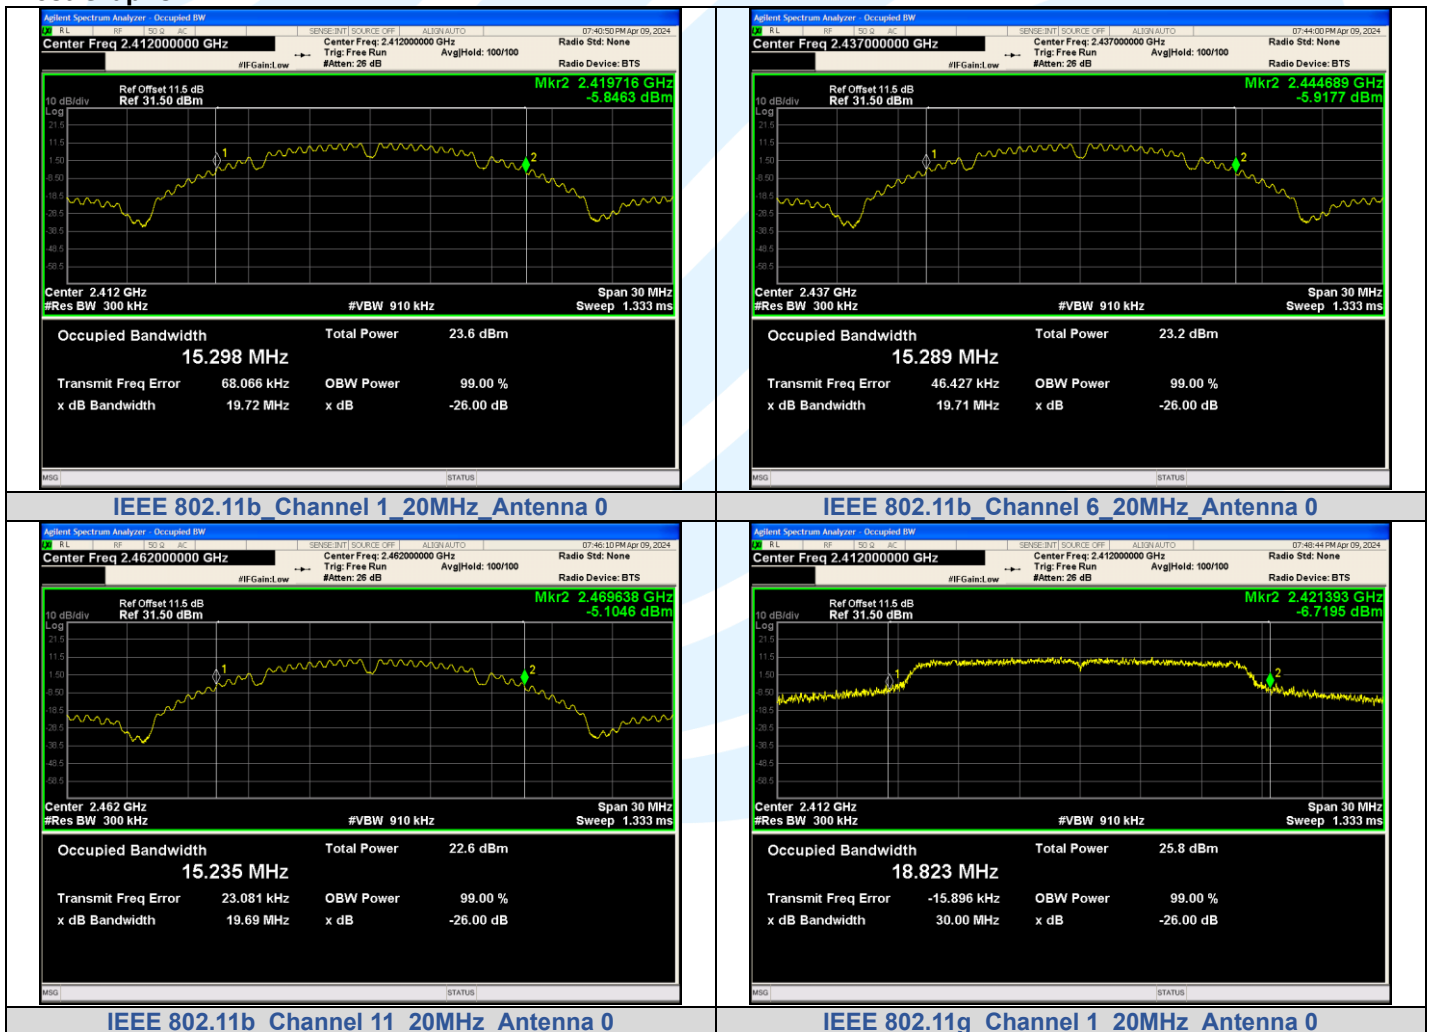

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-FCCPART15.247-V1.2

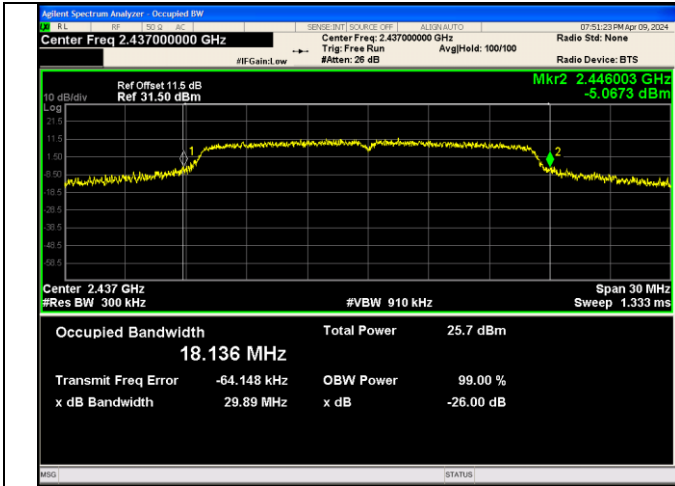


IEEE 802.11g Channel 6 20MHz Antenna 0

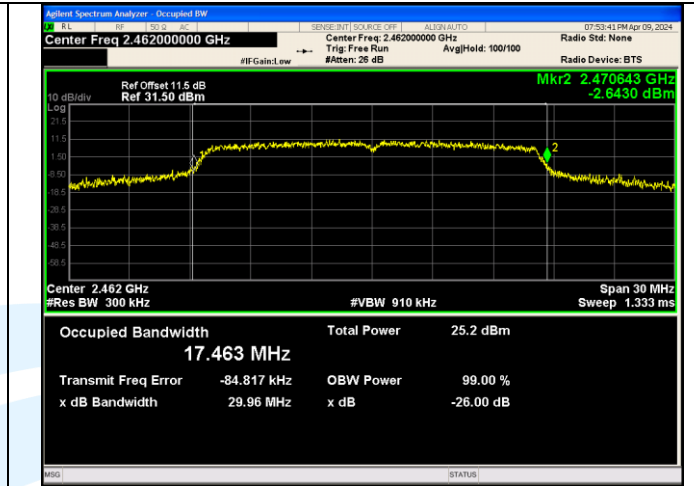


IEEE 802.11g Channel 11 20MHz Antenna 0

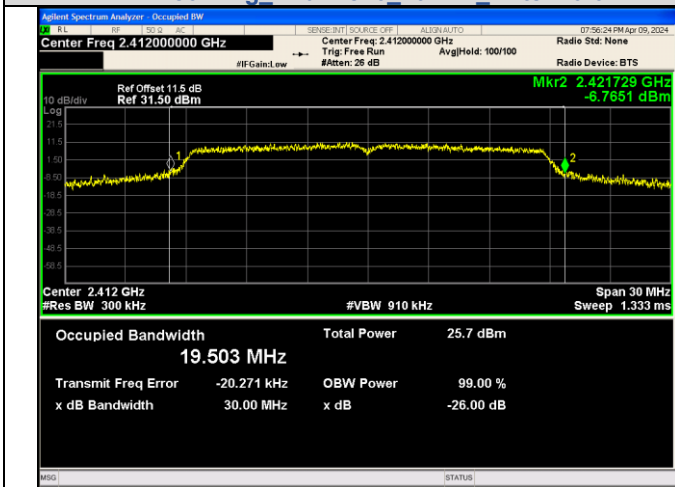


IEEE 802.11n Channel 1 20MHz Antenna 0

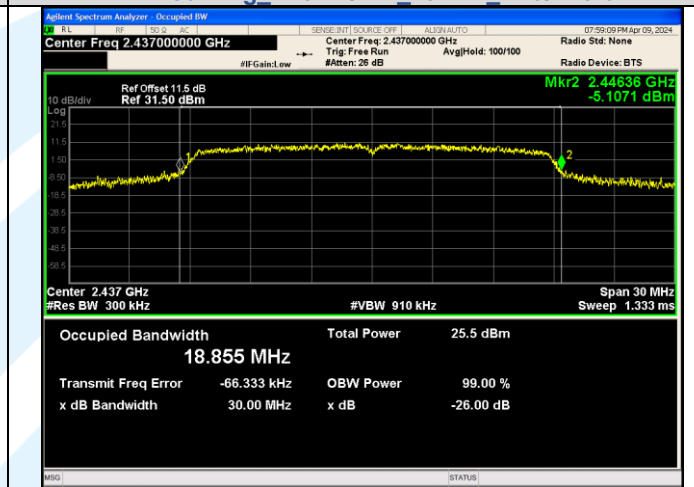

IEEE 802.11n Channel 6 20MHz Antenna 0

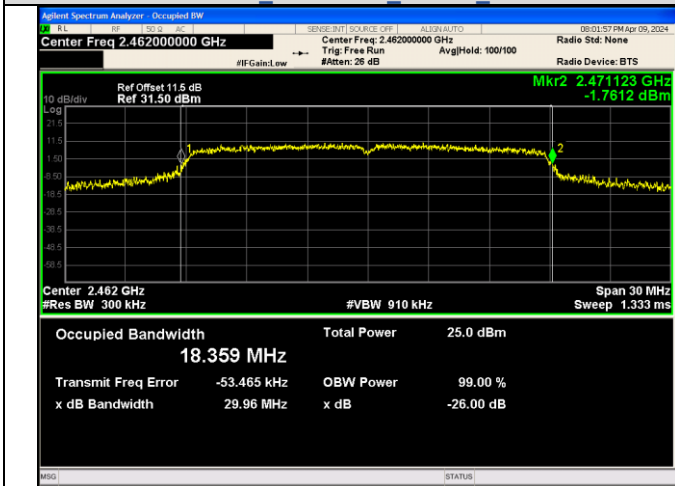

IEEE 802.11n Channel 11 20MHz Antenna 0

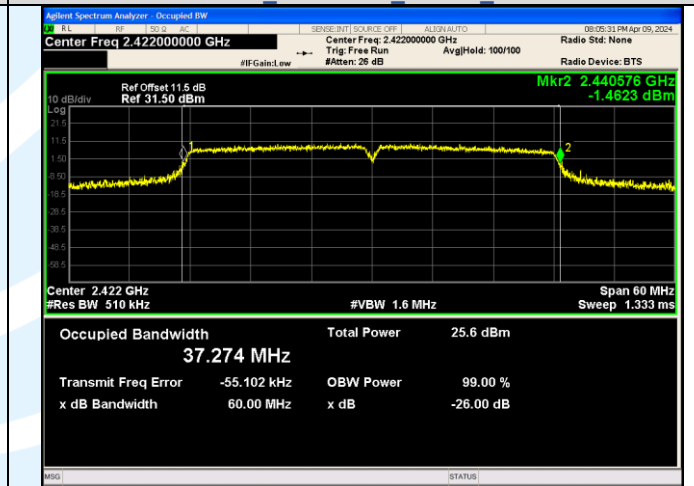

IEEE 802.11n Channel 3 40MHz Antenna 0

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2