



Certificate #4312.01

TEST REPORT

Product Name: High-Performance AX6000 Wi-Fi 6 Access Point
Trade Mark: GRANDSTREAM
Model No.: GWN7664E
Report Number: 2401259035RFC-2
Test Standards: FCC 47 CFR Part 15 Subpart E
FCC ID: YZZGWN7664E
Test Result: PASS
Date of Issue: May 28, 2024

Prepared for:

Grandstream Networks, Inc.
126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:

David Chen
David Chen
Senior Project Engineer

Reviewed by:

Robben Chen
Robben Chen
Assistant Manager

Approved by:


Billy Li
Technical Director

Date:

May 28, 2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

Version

Version No.	Date	Description
V1.0	May 28, 2024	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES.....	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION.....	6
1.5 DESCRIPTION OF SUPPORT UNITS	6
1.6 TEST LOCATION.....	7
1.7 TEST FACILITY.....	7
1.8 DEVIATION FROM STANDARDS	7
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	7
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.11 MEASUREMENT UNCERTAINTY	8
2. TEST SUMMARY	9
3. EQUIPMENT LIST	10
4. TEST CONFIGURATION	11
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	11
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	11
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	11
4.2 TEST CHANNELS	12
4.3 EUT TEST STATUS	13
4.4 PRE-SCAN.....	14
4.5 TEST SETUP	15
4.5.1 FOR RADIATED EMISSIONS TEST SETUP.....	15
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	16
4.5.3 FOR CONDUCTED RF TEST SETUP	17
4.6 SYSTEM TEST CONFIGURATION	18
4.7 DUTY CYCLE	19
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	22
5.1 REFERENCE DOCUMENTS FOR TESTING	22
5.2 ANTENNA REQUIREMENT	22
5.3 26 dB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	23
5.4 6 dB BANDWIDTH & 99% OCCUPIED BANDWIDTH	24
5.5 MAXIMUM CONDUCTED OUTPUT POWER	25
5.6 PEAK POWER SPECTRAL DENSITY	34
5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT	36
5.8 AC POWER LINE CONDUCTED EMISSION	162
APPENDIX A RF TEST DATA.....	165
A.1 99% BANDWIDTH	165
A.2 26dB BANDWIDTH.....	261
A.3 PEAK POWER SPECTRAL DENSITY.....	336
A.4 6dB BANDWIDTH.....	427
APPENDIX 1 PHOTOS OF TEST SETUP	466
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	466

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Grandstream Networks, Inc.
Address of Applicant:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Manufacturer:	Grandstream Networks, Inc.
Address of Manufacturer:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	High-Performance AX6000 Wi-Fi 6 Access Point		
Model No.:	GWN7664E		
Trade Mark:	GRANDSTREAM		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	2.4 GHz ISM Band:	IEEE 802.11b/g/n/ax	
		5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac/ax
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac/ax
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac/ax
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac/ax
		5 850 MHz to 5 895 MHz	IEEE 802.11a/n/ac/ax
Software Version:	0.1.23.1 (Provided by the customer)		
Hardware Version:	V1.0 (Provided by the customer)		
Sample Received Date:	January 25, 2024		
Sample Tested Date:	January 29, 2024 to May 16, 2024		

1.2.2 Description of Accessories

Others
1x Mounting Bracket, 1x Ceiling Mounting Bracket

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Bands:	5150 MHz to 5250 MHz (U-NII-1)
	5250 MHz to 5350 MHz (U-NII-2A)
	5470 MHz to 5725 MHz (U-NII-2C)
	5725 MHz to 5850 MHz (U-NII-3)
	5850 MHz to 5895 MHz (U-NII-4)
Frequency Ranges:	5180 MHz to 5240 MHz
	5260 MHz to 5320 MHz
	5500 MHz to 5720 MHz
	5745 MHz to 5825 MHz
	5845 MHz to 5885 MHz
Support Standards:	IEEE 802.11a/n/ac/ax
TPC Function:	Support
DFS Operational mode:	Master
Type of Modulation:	IEEE 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11ax:OFDMA ^{Note1} (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	IEEE 802.11a/n-HT20/ac-VHT20/ax-HE20: 20 MHz
	IEEE 802.11n-HT40/ac-VHT40/ax-HE40: 40 MHz
	IEEE 802.11ac-VHT80/ax-HE80: 80 MHz
	IEEE 802.11ac-VHT160/ax-HE160: 160 MHz
Data Rate:	IEEE 802.11a: Up to 54 Mbps
	IEEE 802.11n: Up to MCS31
	IEEE 802.11ac-VHT20: Up to MCS8
	IEEE 802.11ac-VHT40/VHT80/VHT160: Up to MCS9
	IEEE 802.11ax-HE20/HE40/HE80/HE160: Up to MCS11
Number of Channels:	5150 MHz to 5350 MHz: 8 for 802.11a/n-HT20/ac-VHT20/ax-HE20 4 for 802.11n-HT40)/ac-VHT40/ax-HE40 2 for 802.11ac-VHT80/ax-HE80 1 for 802.11ac-VHT160/ax-HE160
	5470 MHz to 5725 MHz: 12 for 802.11a/n-HT20/ac-VHT20/ax-HE20 6 for 802.11n-HT40)/ac-VHT40/ax-HE40 3 for 802.11ac-VHT80/ax-HE80 1 for 802.11ac-VHT160/ax-HE160
	5725 MHz to 5895 MHz: 8 for IEEE 802.11a/n-HT20/ac-VHT20/ax-HE20 4 for IEEE 802.11n-HT40/ac-VHT40/ax-HE40 2 for IEEE 802.11ac-VHT80/ax-HE80 1 for 802.11ac-VHT160/ax-HE160
	Antenna 0 PIFA Antenna
	Antenna 1 PIFA Antenna
	Antenna 2 PIFA Antenna
	Antenna 3 PIFA Antenna
Antenna Type: (Provided by the customer)	Antenna NII-1 NII-2A NII-2C NII-3 NII-4
	Antenna 0 5.26 5.26 5.26 5.26 5.26
	Antenna 1 4.61 4.61 4.61 4.61 4.61
	Antenna 2 5.05 5.05 5.05 5.05 5.05
	Antenna 3 4.74 4.74 4.74 4.74 4.74
Antenna Gain (dBi): (Provided by the customer)	Antenna NII-1 NII-2A NII-2C NII-3 NII-4
	Antenna 0 5.26 5.26 5.26 5.26 5.26
	Antenna 1 4.61 4.61 4.61 4.61 4.61
	Antenna 2 5.05 5.05 5.05 5.05 5.05
	Antenna 3 4.74 4.74 4.74 4.74 4.74

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

	Mode	NII-1	NII-2A	NII-2C	NII-3	NII-4
Maximum conducted output power (dBm):	IEEE 802.11a:	21.90	21.26	21.38	21.22	17.09
	IEEE 802.11n-HT20:	22.82	16.30	16.26	23.64	18.02
	IEEE 802.11n-HT40:	23.90	17.07	18.04	23.16	19.04
	IEEE 802.11ac-VHT20	17.19	11.69	16.35	18.14	18.27
	IEEE 802.11ac-VHT40	23.77	18.09	19.04	23.15	19.62
	IEEE 802.11ac-VHT80:	23.56	17.35	17.66	24.03	18.98
	IEEE 802.11ac-VHT160:	24.18		18.42	17.29	
	IEEE 802.11ax-HE20:	23.23	16.66	16.72	23.58	18.29
	IEEE 802.11ax-HE40:	23.59	17.80	17.67	23.03	19.43
	IEEE 802.11ax-HE80:	23.73	17.61	17.46	22.89	19.24
	IEEE 802.11ax-HE160:	23.12	17.43		15.76	
Normal Test Voltage:	48 Vdc					

Note 1: For IEEE 802.11ax, the customer declaration the product supports only the SU mode.

1.4 OTHER INFORMATION

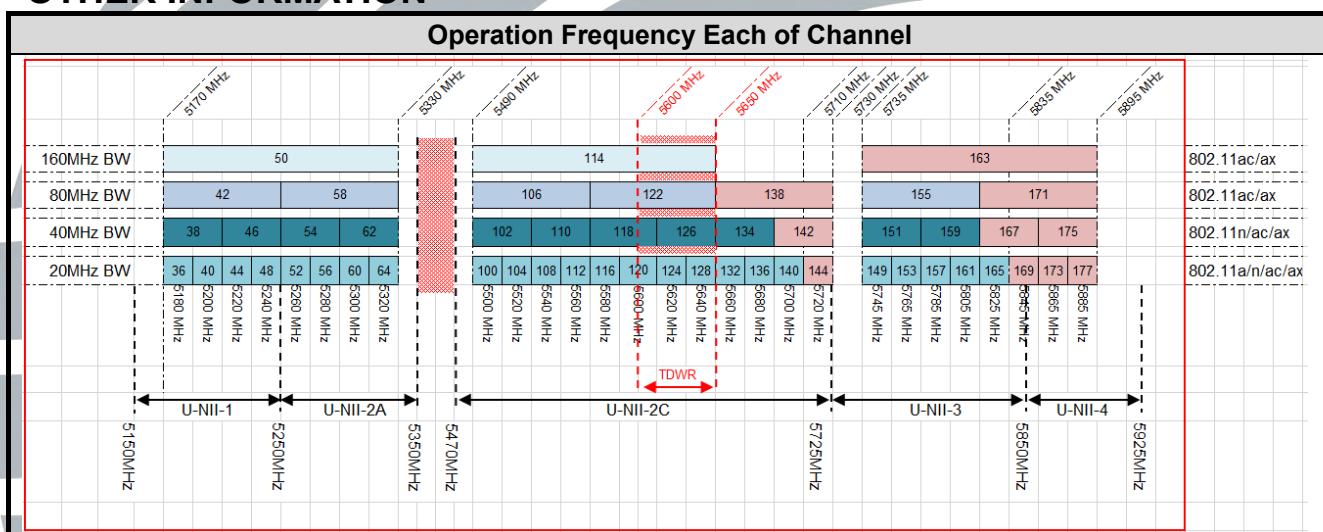

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
POE	Gospower	G0720-480-050	N/A	POE
POE	H3C	EWPAM1NPOE	N/A	POE
Switching Power Adapter	FSP	FSP025-1AD207A	9NA0251014	Switching Power Adapter
SWITCHING ADAPTER	GangQi	GQ48-480100-AA	2348GQ	SWITCHING ADAPTER
Notebook	DELL	Latitude 3400	16238087894	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length(Meter)	Supplied by
1	Ethernet Cable*2	RJ45	1.5 Unshielded without ferrite	UnionTrust
2	Antenna Cable*4	SMA	0.3	UnionTrust

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.9 dB
5	Radiated emission 1GHz-18GHz	± 4.8 dB
6	Radiated emission 18GHz-26GHz	± 5.1 dB
7	Radiated emission 26GHz-40GHz	± 5.1 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	5.6 GHz: ± 6.4 × 10 ⁻⁸
12	Transmission Time	± 0.19 %

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 FCC 47 CFR Part 15 Subpart E Section 15.407(a)(1) (2)	N/A	PASS
26 dB emission bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5)	KDB 789033 D02 v02r01 Section C.1	PASS
6 dB bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (e)	KDB 789033 D02 v02r01 Section C.2	PASS
99% Occupied Bandwidth	N/A	KDB 789033 D02 v02r01 Section D	N/A <small>Note 3</small>
Maximum conducted output power	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	PASS
Peak Power Spectral Density	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section F	PASS
Radiated Emissions and Band Edge Measurement	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6) FCC 47 CFR Part 15 Subpart C Section 15.209/205	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	PASS
Dynamic Frequency Selection	FCC 47 CFR Part 15 Subpart E Section 15.407 (h)	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	PASS <small>Note 2</small>
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(6) FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013, Section 6.2.	PASS

Note:

- 1) N/A: In this whole report not applicable.
- 2) Please refer to Report No.: 2401259035RFC-3 for DFS Test report.
- 3) No test requirement, for reporting purposes only.

Disclaimer and Explanations:

The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT001270-13 17	11-Nov-2023	10-Nov-2026
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSV40-N	101653	14-Apr-2023 29-Mar-2024	13-Apr-2024 28-Mar-2025
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	16-Apr-2023 01-Apr-2024	15-Apr-2024 31-Mar-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118385	00201874	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118384	00202652	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Band Rejection Filter (5150MHz~5880MHz)	Micro-Tronics	BRM50716	G186	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	101181	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	27-Oct-2023	26-Oct-2024
<input type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	14-Apr-2023 29-Mar-2024	13-Apr-2024 28-Mar-2025
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY51286807	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	27-Oct-2023	26-Oct-2024
<input type="checkbox"/>	EXG-B RF Analog Signal Generator	KEYSIGHT	N5171B	MY53051777	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	27-Oct-2023	26-Oct-2024

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	48	20 to 75
Remark:			
1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	18.2	63.4	100.1	S20240125665-ZJA04/5	Linson Xie
26 dB emission bandwidth					
Maximum conducted output power					
Peak Power Spectral Density	22.8	55.6	99.9	S20240125665-ZJA02/5	Allen Zhou
99% Occupied Bandwidth					
6 dB bandwidth					
Dynamic Frequency Selection	27.6	55.9	100.5	S20240125665-ZJA01/5	Allen Zhou
Radiated Emissions and Band Edge Measurement	21.8	55.7	100.1	S20240125665-ZJA04/5	Fire Huo

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11a IEEE 802.11n-HT20 IEEE 802.11ac-VHT20 IEEE 802.11ax-HE20	5150 - 5250 MHz	Channel 36	Channel 44	Channel 48
		5180 MHz	5220 MHz	5240 MHz
	5250 - 5350 MHz	Channel 52	Channel 60	Channel 64
		5260 MHz	5300 MHz	5320 MHz
	5470 - 5725 MHz	Channel 100	Channel 120	Channel 140/ Channel 144
		5500 MHz	5600 MHz	5700 MHz/ 5720MHz
	5725 - 5895 MHz	Channel 144/ Channel 149	Channel 157	Channel 165
		5720MHz/ 5745 MHz	5785 MHz	5825 MHz
		Channel 169	Channel 173	Channel 177
		5845 MHz	5865MHz	5885MHz
IEEE 802.11n-HT40 IEEE 802.11ac-VHT40 IEEE 802.11ax-HE4 0	5150 - 5250 MHz	Channel 38	--	Channel 46
		5190 MHz	--	5230 MHz
	5250 - 5350 MHz	Channel 54	--	Channel 62
		5270 MHz	--	5310 MHz
	5470 - 5725 MHz	Channel 102	Channel 118	Channel 134/ Channel 142
		5510 MHz	5590 MHz	5670 MHz/ 5710MHz
	5725 - 5895 MHz	Channel 142/ Channel 151	--	Channel 159
		5710MHz/ 5755 MHz	--	5795 MHz
		Channel 167	--	Channel 175
		5835 MHz	--	5875 MHz
IEEE 802.11ac-VHT80 IEEE 802.11ax-HE80	5150 - 5250 MHz	--	Channel 42	--
		--	5210 MHz	--
	5250 - 5350 MHz	--	Channel 58	--
		--	5290 MHz	--
	5470 - 5725 MHz	Channel 106	--	Channel 122/ Channel 138
		5530 MHz	--	5610 MHz/ 5569 MHz
	5725 - 5895 MHz	Channel 138	Channel 155	--
		5610 MHz/	5775 MHz	--
		--	Channel 171	--
		--	5855 MHz	--
IEEE 802.11ac-VHT160 IEEE 802.11ax-HE160	5150 - 5350 MHz	Channel 50		
		5250 MHz		
	5470 - 5725 MHz	Channel 114		
		5570 MHz		
	5725 - 5895 MHz	Channel 163		
		5815 MHz		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11a	1Tx/1Rx	
IEEE 802.11n		1. Keep the EUT in continuously transmitting or receiving with modulation and data rates test single.
IEEE 802.11ac	4Tx/4Rx	2. Keep the equipment in normal operation and achieve a certain throughput.
IEEE 802.11ax		

Mode	Power Setting (Provided by the customer)				
	U-NII-1 Ant. 0~4	U-NII-2A Ant. 0~4	U-NII-2C Ant. 0~4	U-NII-3 Ant. 0~4	U-NII-4 Ant. 0~4
IEEE 802.11a	20	20	20	20	17
IEEE 802.11n-HT20	15.5	8.5	8.5	17	12
IEEE 802.11n-HT40	17	11	11	17	14
IEEE 802.11ac-VHT20	15.5	8.5	8.5	17	12
IEEE 802.11ac-VHT40	17	11	11	17	14
IEEE 802.11ac-VHT80	17	11	11	17	14
IEEE 802.11ac-VHT160		11	11		15
IEEE 802.11ax-HE20 (SU)	15.5	8.5	8.5	17	12
IEEE 802.11ax-HE40 (SU)	17	11	11	17	14
IEEE 802.11ax-HE80 (SU)	17	11	11	17	14
IEEE 802.11ax-HE160 (SU)		11	11		13

Test Software (Provided by the customer)

Test software name: QATool_Ulv2.78_DLLv6.83_ap_2021.11.05

4.4 PRE-SCAN

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11a	6 Mbps
IEEE 802.11n-HT20	MCS24
IEEE 802.11n-HT40	MCS24
IEEE 802.11ac-VHT20	MCS0
IEEE 802.11ac-VHT40	MCS0
IEEE 802.11ac-VHT80	MCS0
IEEE 802.11ac-VHT160	MCS0
IEEE 802.11ax-HE20	MCS0
IEEE 802.11ax-HE40	MCS0
IEEE 802.11ax-HE80	MCS0
IEEE 802.11ax-HE160	MCS0

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

Figure 1. Below 30MHz

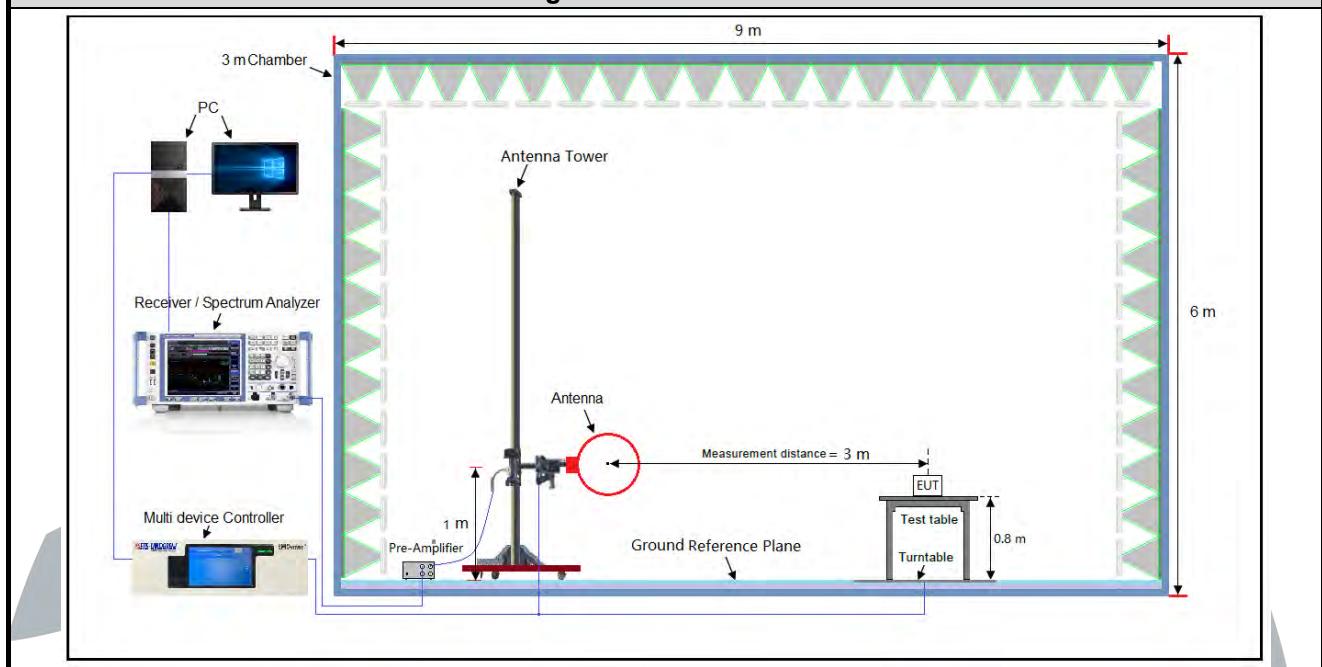


Figure 2. 30MHz to 1GHz




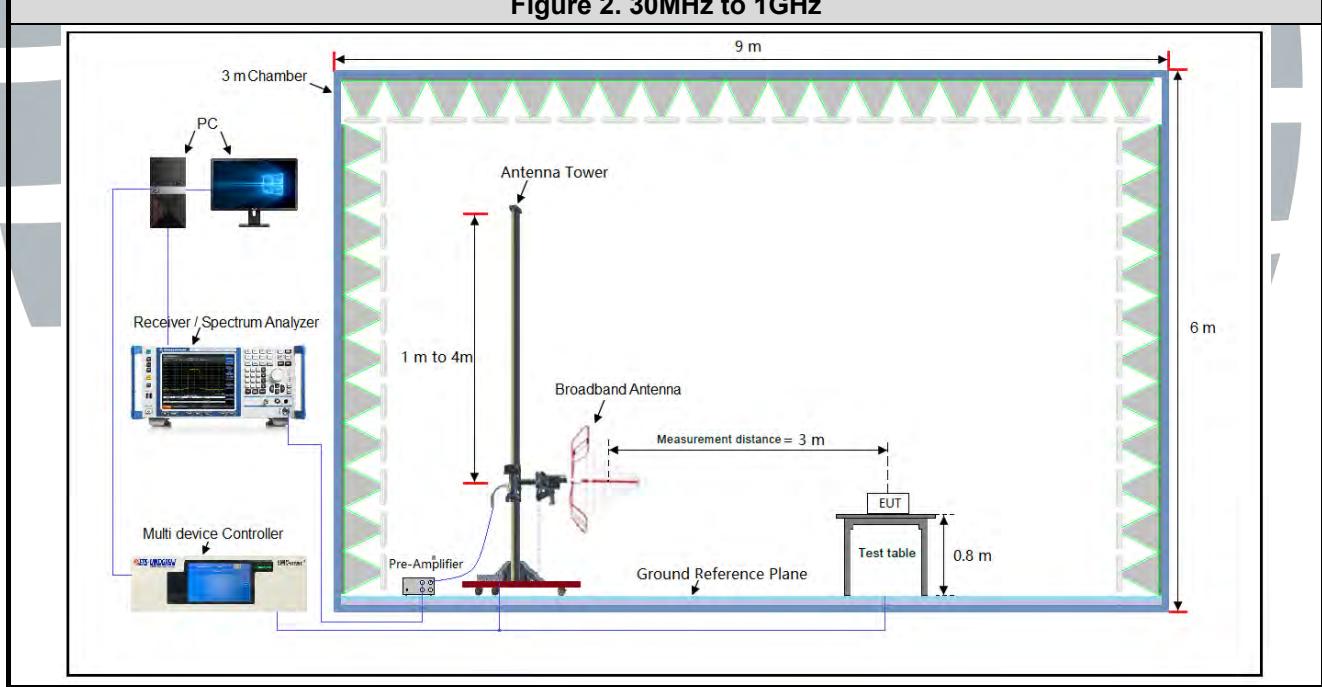


Figure 3. Above 1GHz

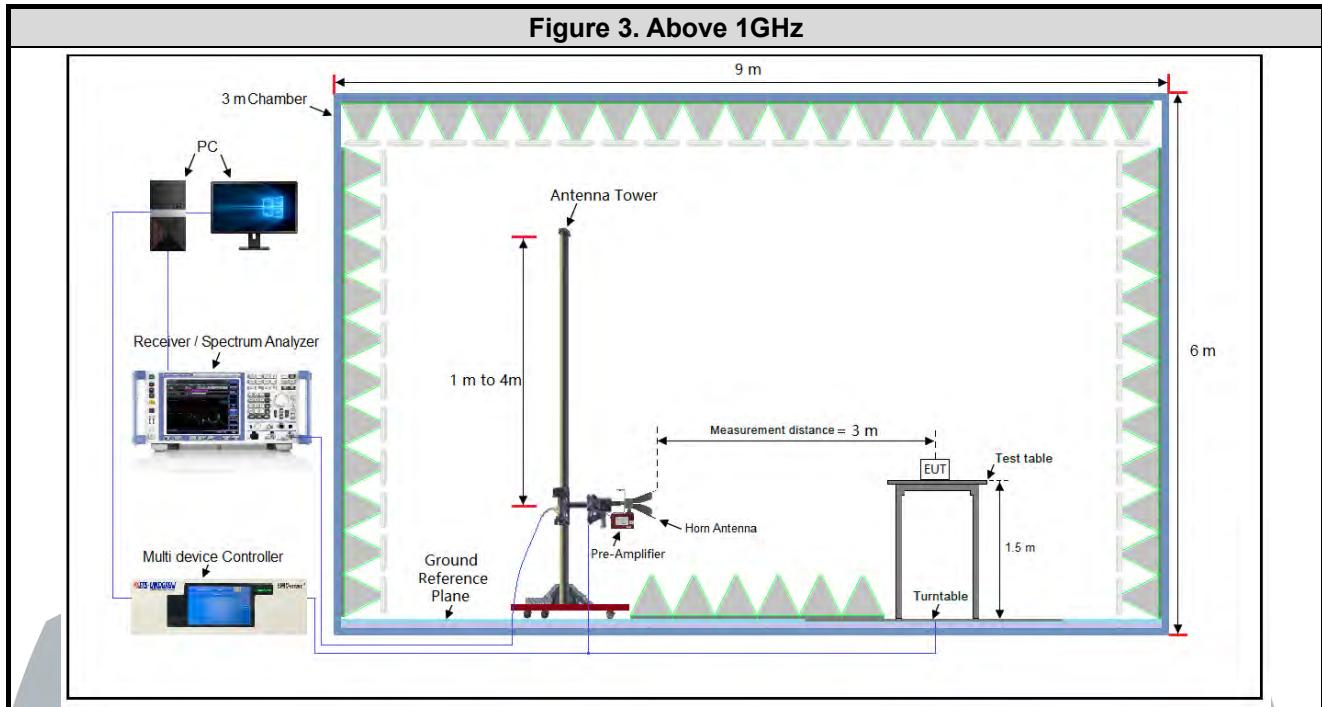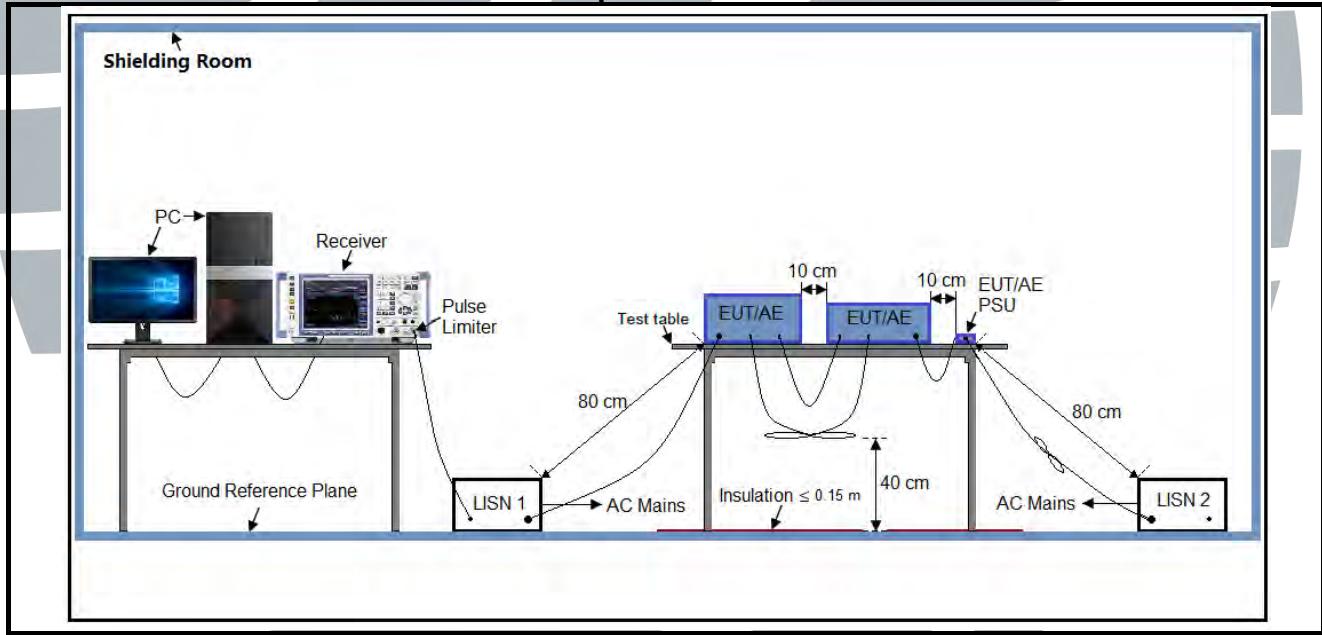

4.5.2 For Conducted Emissions test setup

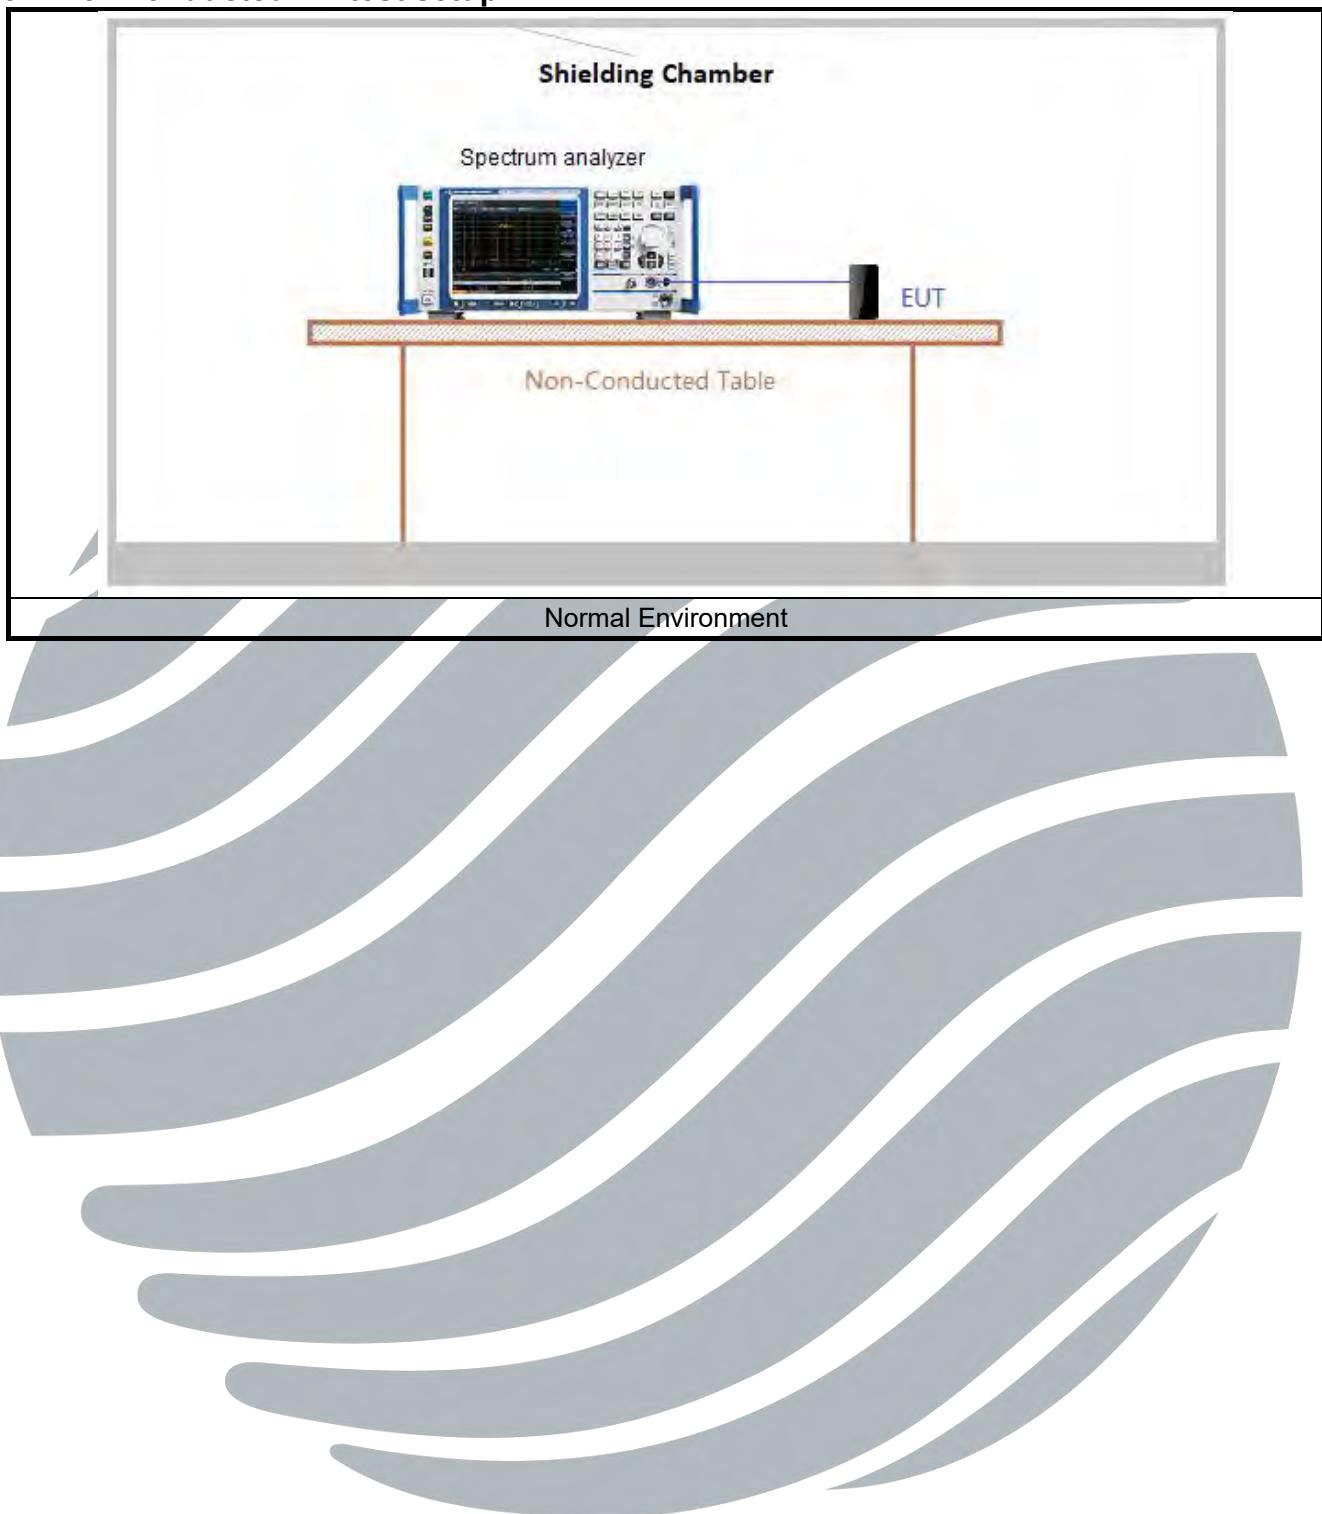

4.5.3 For Conducted RF test setup

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.



4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 12.2.


Test Results


Mode	RU	Data Rates	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
IEEE 802.11a	N/A	6 Mbps	1.397	1.453	0.96	96.15	0.171	0.72
IEEE 802.11n-HT20	N/A	MCS 24	0.370	0.425	0.87	87.06	0.602	2.70
IEEE 802.11n-HT40	N/A	MCS 24	0.200	0.260	0.77	76.92	1.139	5.00
IEEE 802.11ac-VHT20	N/A	MCS 0	0.371	0.428	0.87	86.68	0.621	2.70
IEEE 802.11ac-VHT40	N/A	MCS 0	0.208	0.265	0.78	78.49	1.052	4.81
IEEE 802.11ac-VHT80	N/A	MCS 0	0.123	0.180	0.68	68.33	1.654	8.13
IEEE 802.11ac-VHT160	N/A	MCS 0	0.088	0.145	0.61	60.82	2.160	11.36
IEEE 802.11ax-HE20	SU	MCS 0	0.346	0.404	0.86	85.64	0.673	2.89
IEEE 802.11ax-HE40	SU	MCS 0	0.347	0.404	0.86	85.89	0.661	2.88
IEEE 802.11ax-HE80	SU	MCS 0	0.338	0.395	0.86	85.57	0.677	2.96
IEEE 802.11ax-HE160	SU	MCS 0	0.333	0.390	0.85	85.38	0.686	3.00

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/\text{Duty cycle})$

The test plots as follows

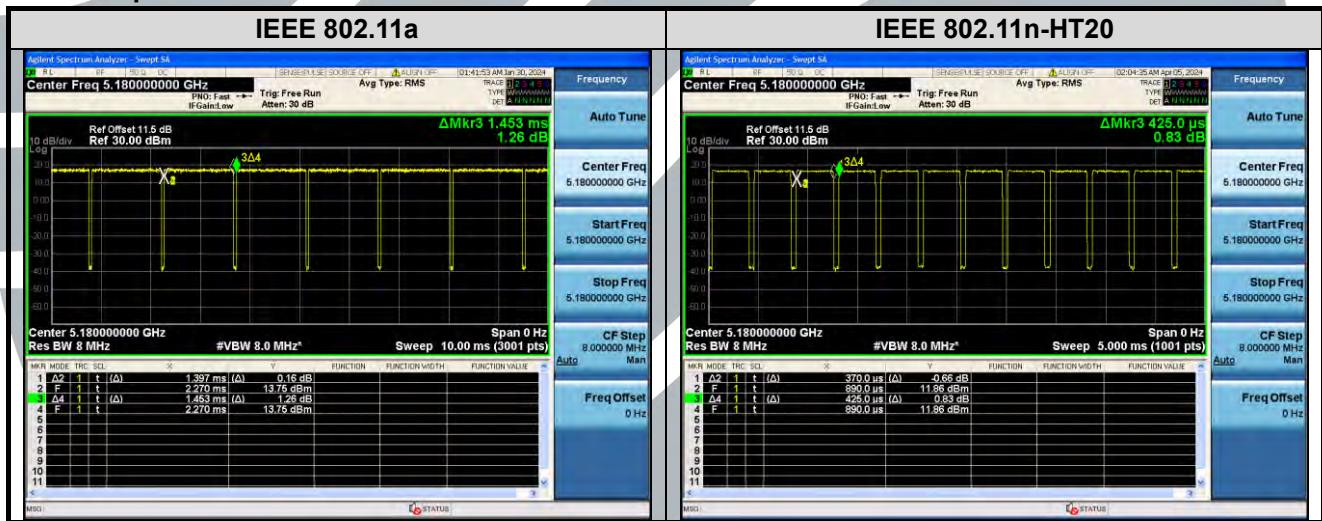

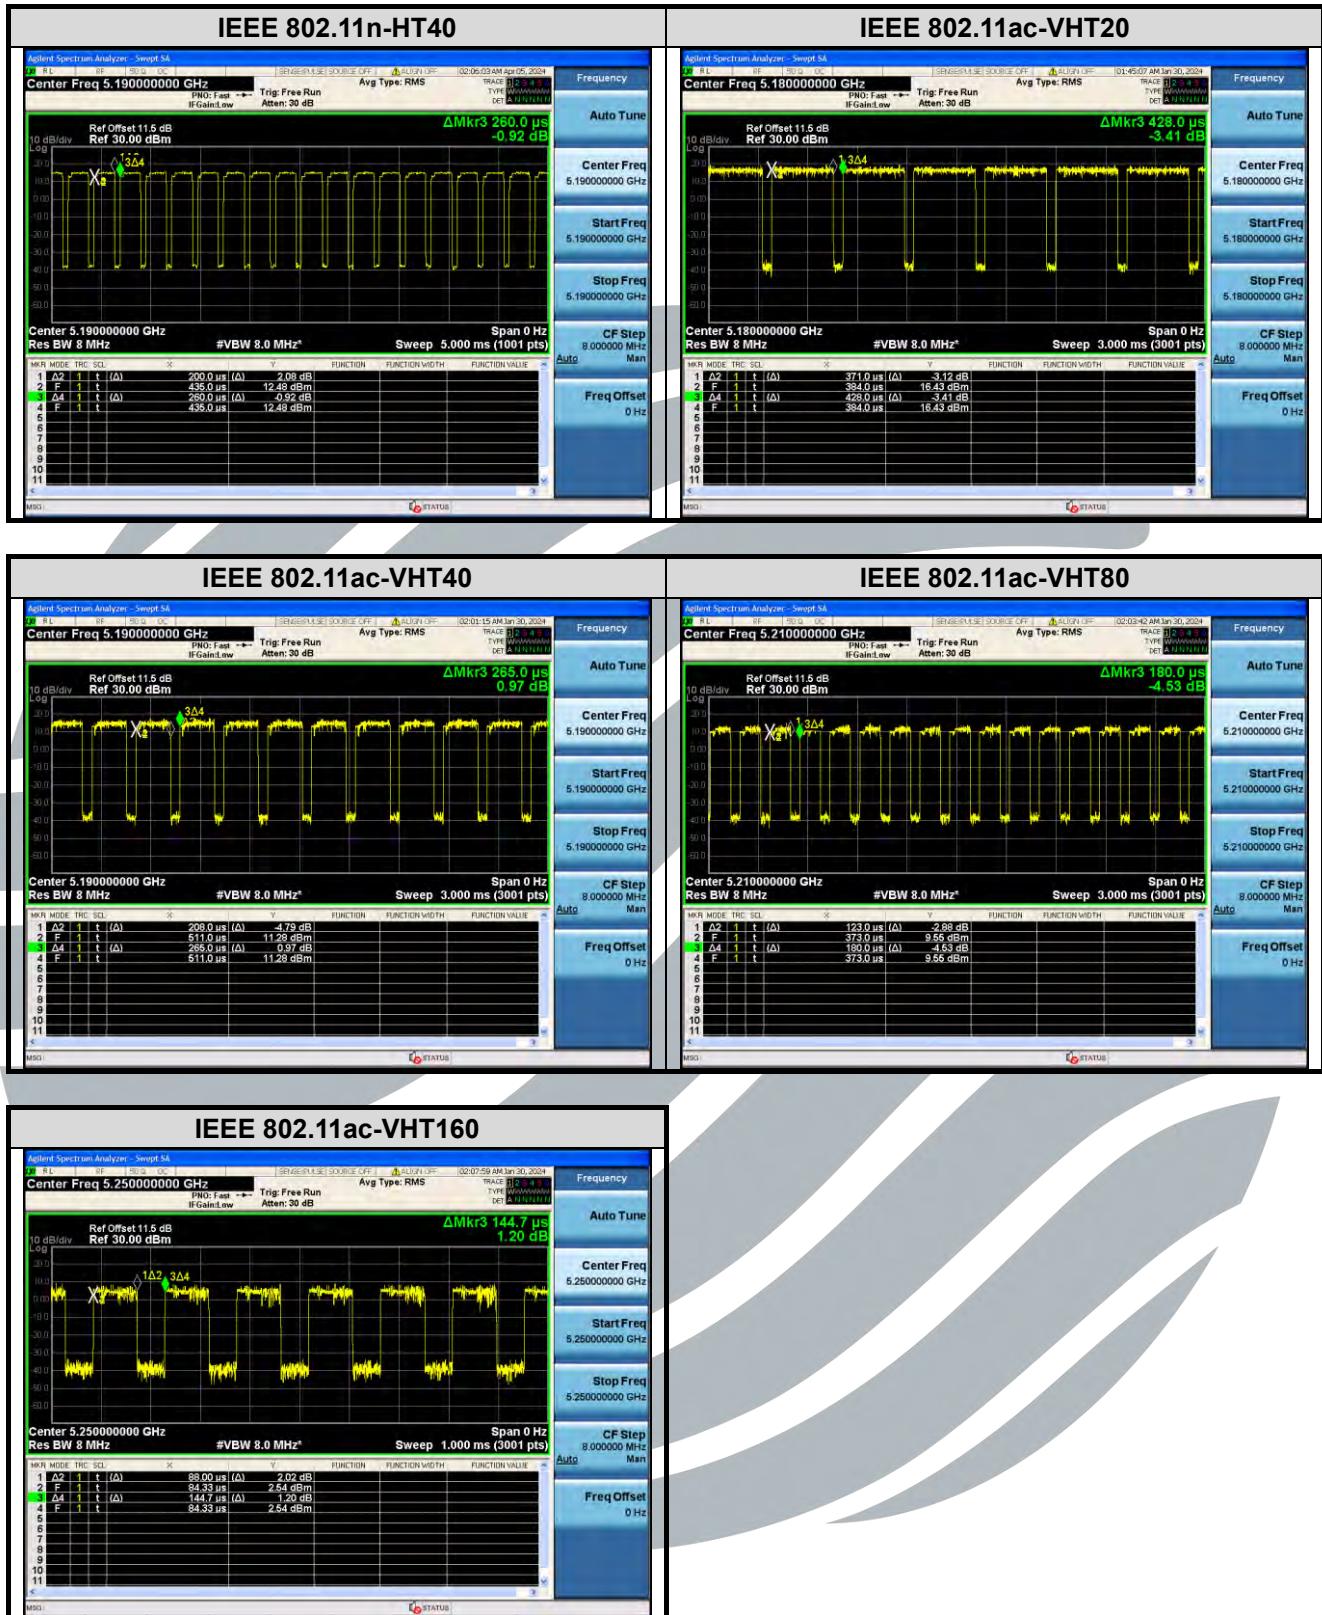



5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
5	KDB 905462 D06 802.11 Channel Plans New Rules v02	Operation in U-NII bands -802.11 channel PLAN(§15.407)
6	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	Compliance measurement procedures for Unlicensed –National Information Infrastructure devices operates in the frequency bands 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands incorporating dynamic frequency selection
7	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

5.2 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.407(a)(1) (2) requirement:

The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

All antennas (4 Antennas) in the interior of the equipment and no consideration of replacement. The transmit signals are correlated with each other, the best case directional gain of the antenna is 10.94 dBi. (See section 5.5).

5.3.26 DB BANDWIDTH & 99% OCCUPIED BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a) (2)(5)

Test Method: KDB 789033 D02 v02r01 Section C.1

Limit: None; for reporting purposes only.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.

26 dB Bandwidth

Spectrum analyzer according to the following Settings:

- a) Set RBW = approximately 1 % of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Occupied Bandwidth

- a) Set center frequency to the nominal EUT channel center frequency.
- b) Set span = 1.5 times to 5.0 times the OBW.
- c) Set RBW = 1% to 5% of the OBW
- d) Set VBW $\geq 3 \times$ RBW
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available).
- g) If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

Test Results: Please refer to Appendix A

5.4.6 DB BANDWIDTH & 99% OCCUPIED BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.407 (e)

Test Method: KDB 789033 D02 v02r01Section C.2

Limit: Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

6dB Bandwidth

Spectrum analyzer according to the following Settings:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- h) Set center frequency to the nominal EUT channel center frequency.
- i) Set span = 1.5 times to 5.0 times the OBW.
- j) Set RBW = 1% to 5% of the OBW
- k) Set VBW $\geq 3 \times \text{RBW}$
- l) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- m) Use the 99% power bandwidth function of the instrument (if available).
- n) If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Transmitter mode

Test Results: Pass

Test Results: Please refer to Appendix A

5.5 MAXIMUM CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)

Test Method: KDB 789033 D02 v02r01 Section E.3.a(Method PM)

Limits:

1. For the band 5.15-5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
 - (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

4. For an indoor access point operating in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 20 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. Indoor access points operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 36 dBm.

Test Procedure:

1. Connected the EUT's antenna port to measure device by 10dB attenuator.
2. Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of Tx on burst.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Transmitter mode

Test Results: Pass

Test Data:

Directional gain and the maximum output power limit.

Frequency (MHz)	Antenna Gain (dBi)				Directional gain (dBi)		FCC Limit	
	Ant .0	Ant .1	Ant .2	Ant .3	Power	PSD	Power (dBm)	PSD (dBm/MHz or dBm/500kHz)
U-NII-1	5.26	4.61	5.05	4.74	10.94	10.94	25.06	12.06
U-NII-2A	5.26	4.61	5.05	4.74	10.94	10.94	19.06	6.06
U-NII-2C	5.26	4.61	5.05	4.74	10.94	10.94	19.06	6.06
U-NII-3	5.26	4.61	5.05	4.74	10.94	10.94	25.06	25.06
U-NII-4	5.26	4.61	5.05	4.74	10.94	10.94	36 (EIRP)	20 (EIRP)

Unequal antenna gains, with equal transmit powers. Directional gain is to be computed as follows:
If transmit signals are correlated, then

Directional gain = $10^{\log_{10}[(10^G1/20 + 10^G2/20 + \dots + 10^{GN}/20)^2 / NANT] \text{ dB}}$ [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

For U-NII-2A:

IEEE 802.11a/n/ac/ax: the minimum 26 dB emission bandwidth is 21.35 MHz

$$11 \text{ dBm} + 10\log_{10}(21.35) = 24.29 \text{ dBm}$$

$$24.29 \text{ dBm} > 24 \text{ dBm}$$

So the 24 dBm limit applicable

For U-NII-2C Band:

IEEE 802.11a: the minimum 26 dB emission bandwidth is 21.24 MHz

$$11 \text{ dBm} + 10\log_{10}(21.24) = 24.27 \text{ dBm}$$

$$24.27 \text{ dBm} > 24 \text{ dBm} > 24.29 \text{ dBm}$$

So the 24 dBm limit applicable

**Maximum output power (TPC Highest Power)
IEEE 802.11a/n/ac**

Mode	Band	Freq. (MHz)	CONDUCTED AVG POWER									Limit (dBm)	Result		
			Meas Value (dBm)				Corr'd Value (dBm)								
			Ant. 0	Ant. 1	Ant. 2	Ant. 3	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total				
IEEE 802.11a	U-NII-1	5180	21.73	21.58	21.15	19.77	21.90	21.75	21.32	19.94	N/A	30	Pass		
		5220	20.89	20.99	21.71	19.79	21.06	21.16	21.88	19.96		30	Pass		
		5240	21.16	20.72	21.68	20.03	21.33	20.89	21.85	20.20		30	Pass		
	U-NII-2A	5260	20.51	21.09	20.59	20.14	20.68	21.26	20.76	20.31		24	Pass		
		5300	20.38	20.12	20.71	20.33	20.55	20.29	20.88	20.50		24	Pass		
		5320	20.41	20.12	20.59	20.48	20.58	20.29	20.76	20.65		24	Pass		
	U-NII-2C	5500	20.48	20.73	20.32	19.71	20.65	20.90	20.49	19.88		24	Pass		
		5600	20.64	21.21	21.12	20.27	20.81	21.38	21.29	20.44		24	Pass		
		5700	19.41	20.02	19.68	19.97	19.58	20.19	19.85	20.14		24	Pass		
	U-NII-3	5720	19.71	20.18	19.89	20.25	19.88	20.35	20.06	20.42		24	Pass		
		5745	19.78	20.98	20.26	20.23	19.95	21.15	20.43	20.40		30	Pass		
		5785	20.05	21.05	20.44	20.26	20.22	21.22	20.61	20.43		30	Pass		
		5825	19.52	20.81	20.22	19.58	19.69	20.98	20.39	19.75		30	Pass		
IEEE 802.11n-HT20	U-NII-1	5180	16.04	17.03	15.88	15.39	16.64	17.63	16.48	15.99	N/A	22.75	25.06	Pass	
		5220	15.98	16.91	16.01	15.82	16.58	17.51	16.61	16.42		22.82	25.06	Pass	
		5240	16.01	16.88	15.94	15.51	16.61	17.48	16.54	16.11		22.74	25.06	Pass	
	U-NII-2A	5260	9.04	10.58	9.24	9.31	9.64	11.18	9.84	9.91		16.21	19.06	Pass	
		5300	9.08	10.29	9.71	9.44	9.68	10.89	10.31	10.04		16.28	19.06	Pass	
		5320	9.12	10.23	9.68	9.62	9.72	10.83	10.28	10.22		16.30	19.06	Pass	
	U-NII-2C	5500	9.09	10.14	9.43	9.77	9.69	10.74	10.03	10.37		16.25	19.06	Pass	
		5600	9.03	10.09	9.75	9.58	9.63	10.69	10.35	10.18		16.25	19.06	Pass	
		5700	8.54	10.26	9.64	9.79	9.14	10.86	10.24	10.39		16.22	19.06	Pass	
	U-NII-3	5720	8.16	10.34	9.82	9.88	8.76	10.94	10.42	10.48		16.25	19.06	Pass	
		5745	16.01	17.33	16.53	16.88	16.61	17.93	17.13	17.48		23.34	25.06	Pass	
		5785	16.28	17.51	17.37	16.81	16.88	18.11	17.97	17.41		23.64	25.06	Pass	
		5825	16.22	17.28	17.24	16.05	16.82	17.88	17.84	16.65		23.36	25.06	Pass	
IEEE 802.11n-HT40	U-NII-1	5190	17.19	16.23	17.27	16.13	18.33	17.37	18.41	17.27	N/A	23.90	25.06	Pass	
		5230	16.89	15.54	17.68	16.14	18.03	16.68	18.82	17.28		23.80	25.06	Pass	
	U-NII-2A	5270	9.51	9.67	10.13	10.29	10.65	10.81	11.27	11.43		17.07	19.06	Pass	
		5310	9.44	9.08	10.52	10.41	10.58	10.22	11.66	11.55		17.07	19.06	Pass	
	U-NII-2C	5510	10.47	10.11	11.15	10.78	11.61	11.25	12.29	11.92		17.80	19.06	Pass	

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

Mode	Band	Freq. (MHz)	CONDUCTED AVG POWER										Limit (dBm)	Result		
			Meas Value (dBm)				Corr'd Value (dBm)									
			Ant. 0	Ant. 1	Ant. 2	Ant. 3	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total					
IEEE 802.11ac-VHT20	U-NII-3	5590	10.53	10.22	11.59	11.04	11.67	11.36	12.73	12.18	18.04	19.06	Pass			
		5670	9.49	9.55	10.97	10.93	10.63	10.69	12.11	12.07	17.45	19.06	Pass			
		5710	9.57	9.31	10.62	10.93	10.71	10.45	11.76	12.07	17.32	19.06	Pass			
		5755	15.41	16.54	15.73	15.91	16.55	17.68	16.87	17.05	23.08	25.06	Pass			
	U-NII-1	5795	15.56	16.74	15.75	15.84	16.70	17.88	16.89	16.98	23.16	25.06	Pass			
		5180	16.24	16.47	15.14	15.48	16.86	17.09	15.76	16.10	22.51	25.06	Pass			
	U-NII-2A	5220	16.25	16.57	15.24	15.74	16.87	17.19	15.86	16.36	22.62	25.06	Pass			
		5240	16.29	16.49	15.11	15.29	16.91	17.11	15.73	15.91	22.48	25.06	Pass			
		5260	9.08	11.07	9.04	9.96	9.70	11.69	9.66	10.58	16.51	19.06	Pass			
	U-NII-2C	5300	9.22	10.88	9.11	9.89	9.84	11.50	9.73	10.51	16.48	19.06	Pass			
		5320	9.29	10.49	9.06	9.65	9.91	11.11	9.68	10.27	16.30	19.06	Pass			
		5500	9.44	10.92	9.03	9.17	10.06	11.54	9.65	9.79	16.35	19.06	Pass			
		5600	9.41	10.68	9.28	9.04	10.03	11.30	9.90	9.66	16.29	19.06	Pass			
		5700	9.09	10.32	9.01	9.15	9.71	10.94	9.63	9.77	16.07	19.06	Pass			
	U-NII-3	5720	9.18	10.39	9.12	9.93	9.80	11.01	9.74	10.55	16.33	19.06	Pass			
		5745	16.03	17.47	16.63	16.82	16.65	18.09	17.25	17.44	23.41	25.06	Pass			
		5785	16.18	17.52	17.41	16.88	16.80	18.14	18.03	17.50	23.67	25.06	Pass			
		5825	15.92	17.28	17.31	16.06	16.54	17.90	17.93	16.68	23.33	25.06	Pass			
IEEE 802.11ac-VHT40	U-NII-1	5190	17.03	16.61	17.03	16.05	18.08	17.66	18.08	17.10	23.77	25.06	Pass			
		5230	16.79	15.88	17.42	16.26	17.84	16.93	18.47	17.31	23.70	25.06	Pass			
	U-NII-2A	5270	10.49	11.32	10.81	11.37	11.54	12.37	11.86	12.42	18.09	19.06	Pass			
		5310	10.58	10.58	11.13	11.52	11.63	11.63	12.18	12.57	18.04	19.06	Pass			
	U-NII-2C	5510	11.69	12.08	11.83	11.89	12.74	13.13	12.88	12.94	18.95	19.06	Pass			
		5590	11.61	12.09	12.12	12.04	12.66	13.14	13.17	13.09	19.04	19.06	Pass			
		5670	10.27	11.39	11.78	11.98	11.32	12.44	12.83	13.03	18.48	19.06	Pass			
		5710	10.62	11.28	11.23	12.11	11.67	12.33	12.28	13.16	18.42	19.06	Pass			
	U-NII-3	5755	15.45	16.62	16.01	16.02	16.50	17.67	17.06	17.07	23.12	25.06	Pass			
		5795	15.57	16.82	15.97	15.84	16.62	17.87	17.02	16.89	23.15	25.06	Pass			
IEEE 802.11ac-VHT80	U-NII-1	5210	16.12	16.35	15.91	15.05	17.77	18.00	17.56	16.70	23.56	25.06	Pass			
	U-NII-2A	5290	9.04	10.15	9.38	10.02	10.69	11.80	11.03	11.67	17.35	19.06	Pass			
	U-NII-2C	5530	9.44	9.03	10.05	9.51	11.09	10.68	11.70	11.16	17.20	19.06	Pass			
		5610	9.35	10.21	10.31	10.03	11.00	11.86	11.96	11.68	17.66	19.06	Pass			
		5690	8.71	9.66	9.24	9.72	10.36	11.31	10.89	11.37	17.03	19.06	Pass			

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

Mode	Band	Freq. (MHz)	CONDUCTED AVG POWER										Limit (dBm)	Result		
			Meas Value (dBm)				Corr'd Value (dBm)									
			Ant. 0	Ant. 1	Ant. 2	Ant. 3	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total					
	U-NII-3	5775	16.29	16.17	16.03	16.88	17.94	17.82	17.68	18.53	24.03	25.06	Pass			
IEEE 802.11ac-VHT160	U-NII-1&U-NII-2A	5250	6.61	6.72	6.16	6.53	8.77	8.88	8.32	8.69	14.69	19.06	Pass			
	U-NII-2C	5570	6.16	6.69	5.85	6.67	8.32	8.85	8.01	8.83	14.54	19.06	Pass			

Mode	Band	Freq. (MHz)	CONDUCTED AVG POWER					EIRP					EIRP Limit (dBm)	Result
			Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total		
IEEE 802.11a	U-NII-4	5845	17.00	17.02	16.71	16.69	N/A	22.26	21.63	21.76	21.43	N/A	36	Pass
		5865	17.01	17.09	16.75	16.62	N/A	22.27	21.70	21.80	21.36	N/A	36	Pass
		5885	17.06	17.05	16.84	16.56	N/A	22.32	21.66	21.89	21.30	N/A	36	Pass
IEEE 802.11n-HT20	U-NII-4	5845	11.76	12.15	12.05	11.75	17.95	17.02	16.76	17.10	16.49	28.89	36	Pass
		5865	11.85	12.14	11.83	11.71	17.90	17.11	16.75	16.88	16.45	28.84	36	Pass
		5885	11.92	12.12	11.81	12.17	18.02	17.18	16.73	16.86	16.91	28.96	36	Pass
IEEE 802.11n-HT40	U-NII-4	5835	12.97	13.20	12.80	12.88	18.98	18.23	17.81	17.85	17.62	29.92	36	Pass
		5875	13.03	13.32	12.97	12.77	19.04	18.29	17.93	18.02	17.51	29.98	36	Pass
IEEE 802.11ac-VHT20	U-NII-4	5845	12.14	12.58	12.05	12.10	18.24	17.40	17.19	17.10	16.84	29.18	36	Pass
		5865	12.19	12.52	12.22	12.06	18.27	17.45	17.13	17.27	16.80	29.21	36	Pass
		5885	12.36	12.53	12.13	11.65	18.20	17.62	17.14	17.18	16.39	29.14	36	Pass
IEEE 802.11ac-VHT40	U-NII-4	5835	13.48	13.78	13.28	13.38	19.51	18.74	18.39	18.33	18.12	30.45	36	Pass
		5875	13.76	13.83	13.45	13.35	19.62	19.02	18.44	18.50	18.09	30.56	36	Pass
IEEE 802.11ac-VHT80	U-NII-4	5855	12.68	13.08	13.17	12.88	18.98	17.94	17.69	18.22	17.62	29.92	36	Pass
IEEE 802.11ac-VHT160	U-NII-4	5815	11.37	11.04	11.12	11.51	17.29	16.63	15.65	16.17	16.25	28.23	36	Pass

IEEE 802.11ax

Mode	Band	Freq. (MHz)	RU & Index	CONDUCTED AVG POWER										Limit (dBm)	Result	
				Meas Value (dBm)				Corr'd Value (dBm)								
				Ant. 0	Ant. 1	Ant. 2	Ant. 3	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total				
IEEE 802.11ax-HE20	U-NII-1	5180	SU	16.33	17.16	16.51	16.05	17.00	17.83	17.18	16.72	23.23	25.06	Pass		
		5220	SU	16.45	17.04	16.42	16.11	17.12	17.71	17.09	16.78	23.21	25.06	Pass		
		5240	SU	16.41	17.12	16.33	16.07	17.08	17.79	17.00	16.74	23.19	25.06	Pass		
	U-NII-2A	5260	SU	9.24	11.02	9.16	10.18	9.91	11.69	9.83	10.85	16.66	19.06	Pass		
		5300	SU	9.48	10.61	9.43	10.04	10.15	11.28	10.10	10.71	16.61	19.06	Pass		
		5320	SU	9.51	10.52	9.34	10.07	10.18	11.19	10.01	10.74	16.58	19.06	Pass		
	U-NII-2C	5500	SU	9.23	11.04	9.18	9.93	9.90	11.71	9.85	10.60	16.61	19.06	Pass		
		5600	SU	9.19	11.11	9.77	9.81	9.86	11.78	10.44	10.48	16.72	19.06	Pass		
		5700	SU	9.08	10.71	9.25	9.94	9.75	11.38	9.92	10.61	16.49	19.06	Pass		
		5720	SU	9.28	10.87	9.22	10.06	9.95	11.54	9.89	10.73	16.60	19.06	Pass		
	U-NII-3	5745	SU	15.64	17.13	16.29	16.37	16.31	17.80	16.96	17.04	23.08	25.06	Pass		
		5785	SU	16.11	17.54	17.16	16.58	16.78	18.21	17.83	17.25	23.58	25.06	Pass		
		5825	SU	15.51	17.21	16.98	15.74	16.18	17.88	17.65	16.41	23.12	25.06	Pass		
IEEE 802.11ax-HE40	U-NII-1	5190	SU	17.44	16.67	17.01	16.44	18.10	17.33	17.67	17.10	23.59	25.06	Pass		
		5230	SU	17.29	15.83	17.24	16.42	17.95	16.49	17.90	17.08	23.42	25.06	Pass		
	U-NII-2A	5270	SU	10.75	10.51	11.19	11.69	11.41	11.17	11.85	12.35	17.74	19.06	Pass		
		5310	SU	10.86	10.55	11.15	11.83	11.52	11.21	11.81	12.49	17.80	19.06	Pass		
	U-NII-2C	5510	SU	11.02	10.89	10.76	11.27	11.68	11.55	11.42	11.93	17.67	19.06	Pass		
		5590	SU	10.44	10.76	10.71	11.08	11.10	11.42	11.37	11.74	17.43	19.06	Pass		
		5670	SU	9.37	10.05	10.01	10.78	10.03	10.71	10.67	11.44	16.76	19.06	Pass		
		5710	SU	9.49	9.85	9.46	10.96	10.15	10.51	10.12	11.62	16.67	19.06	Pass		
	U-NII-3	5710	SU	9.49	9.85	9.46	10.96	10.15	10.51	10.12	11.62	16.67	25.06	Pass		
		5755	SU	15.55	16.88	16.18	16.02	16.21	17.54	16.84	16.68	22.87	25.06	Pass		
		5795	SU	15.82	16.98	16.41	16.12	16.48	17.64	17.07	16.78	23.03	25.06	Pass		
IEEE 802.11ax-HE80	U-NII-1	5210	SU	17.23	17.55	17.01	16.25	17.91	18.23	17.69	16.93	23.73	25.06	Pass		
		5290	SU	10.02	11.54	10.48	11.41	10.70	12.22	11.16	12.09	17.61	19.06	Pass		
	U-NII-2C	5530	SU	10.64	10.81	10.67	10.91	11.32	11.49	11.35	11.59	17.46	19.06	Pass		
		5610	SU	10.19	10.54	10.78	10.88	10.87	11.22	11.46	11.56	17.30	19.06	Pass		
		5690	SU	9.24	9.78	10.09	10.69	9.92	10.46	10.77	11.37	16.68	19.06	Pass		
	U-NII-3	5775	SU	15.64	16.74	16.26	16.07	16.32	17.42	16.94	16.75	22.89	25.06	Pass		
IEEE 802.11ax-HE160	U-NII-1& U-NII-2A	5250	SU	8.34	8.54	7.94	8.47	9.03	9.23	8.63	9.16	15.04	19.06	Pass		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

Mode	Band	Freq. (MHz)	RU & Index	CONDUCTED AVG POWER										Limit (dBm)	Result			
				Meas Value (dBm)				Corr'd Value (dBm)										
				Ant. 0	Ant. 1	Ant. 2	Ant. 3	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total						
	U-NII-2C	5570	SU	8.05	8.61	7.82	8.53	8.74	9.30	8.51	9.22	14.97	19.06	Pass				

Mode	Band	Freq. (MHz)	RU & Index	CONDUCTED AVG POWER					EIRP					EIRP Limit (dBm)	Result
				Ant. 0	Ant. 1	Ant. 2	Ant. 3	Corr'd Value (dBm)	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total		
IEEE 802.11ax-HE20	U-NII-4	5845	SU	12.30	12.44	12.21	12.13	18.29	17.56	17.05	17.26	16.87	29.23	36	Pass
		5865	SU	12.31	12.29	12.10	12.18	18.24	17.57	16.90	17.15	16.92	29.18	36	Pass
		5885	SU	12.34	12.43	11.96	12.11	18.24	17.60	17.04	17.01	16.85	29.18	36	Pass
IEEE 802.11ax-HE40	U-NII-4	5835	SU	13.14	13.49	13.21	13.37	19.32	18.40	18.10	18.26	18.11	30.26	36	Pass
		5875	SU	13.44	13.42	13.50	13.30	19.43	18.70	18.03	18.55	18.04	30.37	36	Pass
IEEE 802.11ax-HE80	U-NII-4	5855	SU	13.13	13.38	13.22	13.15	19.24	18.39	17.99	18.27	17.89	30.18	36	Pass
IEEE 802.11ax-HE160	U-NII-4	5815	SU	9.76	9.70	9.56	9.94	15.76	15.02	14.31	14.61	14.68	26.70	36	Pass

**Maximum output power (TPC Lowest Power)
IEEE 802.11a/n/ac**

Mode	Band	Freq. (MHz)	CONDUCTED AVG POWER									Limit (dBm)	Result		
			Meas Value (dBm)				Corr'd Value (dBm)								
			Ant. 0	Ant. 1	Ant. 2	Ant. 3	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total				
IEEE 802.11a	U-NII-2A	5260	15.11	15.35	14.28	14.78	15.28	15.52	14.45	14.95	N/A	24	Pass		
		5300	15.12	14.08	14.52	14.31	15.29	14.25	14.69	14.48		24	Pass		
		5320	15.13	14.32	14.41	13.25	15.30	14.49	14.58	13.42		24	Pass		
	U-NII-2C	5500	15.03	14.68	14.26	13.57	15.20	14.85	14.43	13.74		24	Pass		
		5600	15.22	15.11	15.11	14.23	15.39	15.28	15.28	14.40		24	Pass		
		5700	14.65	14.01	14.62	14.01	14.82	14.18	14.79	14.18		24	Pass		
		5720	14.89	14.33	14.77	14.21	15.06	14.50	14.94	14.38		24	Pass		
		5260	3.01	3.68	3.11	3.22	3.61	4.28	3.71	3.82		9.89	19.06		
IEEE 802.11n-HT20	U-NII-2A	5300	3.08	3.74	3.62	3.31	3.68	4.34	4.22	3.91	10.07	19.06	Pass		
		5320	3.11	3.78	3.31	3.46	3.71	4.38	3.91	4.06		10.04	19.06		
		5500	3.02	3.96	3.27	3.55	3.62	4.56	3.87	4.15		10.09	19.06		
	U-NII-2C	5600	3.01	3.97	3.61	3.47	3.61	4.57	4.21	4.07	10.15	19.06	Pass		
		5700	2.51	3.98	3.52	3.56	3.11	4.58	4.12	4.16		10.05	19.06		
		5720	2.11	3.77	3.71	3.64	2.71	4.37	4.31	4.24		9.98	19.06		
		5270	4.29	4.32	4.03	4.09	5.43	5.46	5.17	5.23		11.34	19.06		
IEEE 802.11n-HT40	U-NII-2A	5310	4.22	4.29	4.32	4.12	5.36	5.43	5.46	5.26	11.40	19.06	Pass		
		5510	4.31	4.21	4.05	4.11	5.45	5.35	5.19	5.25		11.33	19.06		
	U-NII-2C	5590	4.11	4.34	4.31	4.05	5.25	5.48	5.45	5.19	11.36	19.06	Pass		
		5670	4.23	4.59	4.24	4.55	5.37	5.73	5.38	5.69		11.57	19.06		
		5710	4.11	4.77	4.55	4.13	5.25	5.91	5.69	5.27		11.56	19.06		
		5260	3.01	4.97	3.01	3.82	3.63	5.59	3.63	4.44		10.42	19.06		
		5300	3.11	4.77	3.08	3.77	3.73	5.39	3.70	4.39		10.38	19.06		
		5320	3.08	4.35	3.03	3.52	3.70	4.97	3.65	4.14		10.17	19.06		
IEEE 802.11ac-VHT20	U-NII-2A	5500	3.22	4.87	3.02	3.14	3.84	5.49	3.64	3.76	10.27	19.06	Pass		
		5600	3.31	4.52	3.22	3.01	3.93	5.14	3.84	3.63		10.20	19.06		
		5700	3.03	4.18	2.89	3.11	3.65	4.80	3.51	3.73		9.98	19.06		
		5720	3.12	4.22	3.04	3.88	3.74	4.84	3.66	4.50		10.24	19.06		
IEEE 802.11ac-VHT40	U-NII-2A	5270	4.28	5.31	4.77	5.33	5.33	6.36	5.82	6.38	12.02	19.06	Pass		
		5310	4.33	5.59	5.05	5.23	5.38	6.64	6.10	6.28		12.15	19.06		
	U-NII-2C	5510	5.11	6.01	5.46	5.77	6.16	7.06	6.51	6.82	12.67	19.06	Pass		
		5590	5.52	6.02	6.03	6.01	6.57	7.07	7.08	7.06		12.97	19.06		
		5270	4.28	5.31	4.77	5.33	5.33	6.36	5.82	6.38		12.02	19.06		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

Mode	Band	Freq. (MHz)	CONDUCTED AVG POWER										Limit (dBm)	Result		
			Meas Value (dBm)				Corr'd Value (dBm)									
			Ant. 0	Ant. 1	Ant. 2	Ant. 3	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total					
		5670	4.24	4.42	5.64	5.88	5.29	5.47	6.69	6.93	12.18	19.06	Pass			
		5710	4.56	4.22	5.21	6.03	5.61	5.27	6.26	7.08	12.13	19.06	Pass			
		5290	3.98	4.13	3.69	3.05	5.63	5.78	5.34	4.70	11.41	19.06	Pass			
IEEE 802.11ac-VHT80	U-NII-2A	5530	3.87	3.23	4.02	3.14	5.52	4.88	5.67	4.79	11.26	19.06	Pass			
		5610	3.66	4.05	4.11	4.03	5.31	5.70	5.76	5.68	11.64	19.06	Pass			
		5690	3.15	3.22	3.16	3.25	4.80	4.87	4.81	4.90	10.87	19.06	Pass			
IEEE 802.11ac-VHT160	U-NII-2C	5570	4.56	4.62	4.24	4.33	6.72	6.78	6.40	6.49	12.62	19.06	Pass			

Maximum output power (TPC Lowest Power)
IEEE 802.11ax

Mode	Band	Freq. (MHz)	RU & Index	CONDUCTED AVG POWER										Limit (dBm)	Result	
				Meas Value (dBm)				Corr'd Value (dBm)								
				Ant. 0	Ant. 1	Ant. 2	Ant. 3	Ant. 0	Ant. 1	Ant. 2	Ant. 3	Total				
IEEE 802.11ax-HE20	U-NII-2A	5260	SU	3.05	4.95	3.11	4.03	3.72	5.62	3.78	4.70	10.55	19.06	Pass		
		5300	SU	3.22	4.52	3.24	3.97	3.89	5.19	3.91	4.64	10.47	19.06	Pass		
		5320	SU	3.41	4.46	3.21	4.07	4.08	5.13	3.88	4.74	10.51	19.06	Pass		
	U-NII-2C	5500	SU	3.12	4.24	3.17	3.76	3.79	4.91	3.84	4.43	10.29	19.06	Pass		
		5600	SU	3.05	4.89	3.64	3.82	3.72	5.56	4.31	4.49	10.60	19.06	Pass		
		5700	SU	3.03	4.61	3.19	3.84	3.70	5.28	3.86	4.51	10.41	19.06	Pass		
IEEE 802.11ax-HE40	U-NII-2A	5720	SU	3.21	4.66	3.16	4.02	3.88	5.33	3.83	4.69	10.50	19.06	Pass		
		5270	SU	4.66	4.37	5.11	5.34	5.32	5.03	5.77	6.00	11.57	19.06	Pass		
	U-NII-2C	5310	SU	4.78	4.28	5.08	5.69	5.44	4.94	5.74	6.35	11.67	19.06	Pass		
		5510	SU	4.66	4.37	5.11	5.34	5.32	5.03	5.77	6.00	11.57	19.06	Pass		
		5590	SU	4.97	4.79	4.74	5.21	5.63	5.45	5.40	5.87	11.61	19.06	Pass		
		5670	SU	4.62	4.38	4.49	5.64	5.28	5.04	5.15	6.30	11.49	19.06	Pass		
IEEE 802.11ax-HE80	U-NII-2A	5710	SU	4.31	4.56	4.66	4.97	4.97	5.22	5.32	5.63	11.31	19.06	Pass		
		5290	SU	3.95	4.38	4.33	5.22	4.63	5.06	5.01	5.90	11.19	19.06	Pass		
	U-NII-2C	5530	SU	4.54	4.77	4.61	4.82	5.22	5.45	5.29	5.50	11.38	19.06	Pass		
		5610	SU	4.18	4.51	4.74	4.76	4.86	5.19	5.42	5.44	11.25	19.06	Pass		
IEEE 802.11ax-HE160	U-NII-2C	5690	SU	3.22	3.69	4.05	4.59	3.90	4.37	4.73	5.27	10.61	19.06	Pass		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

5.6 PEAK POWER SPECTRAL DENSITY

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)

Test Method: KDB 789033 D02 v02r01 Section F

Limits:

1. For the band 5.15-5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
 - (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
4. For an indoor access point operating in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 20 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-EN300328-V1.2

frequency band of operation must not exceed 36 dBm. Indoor access points operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 36 dBm.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

1. For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 1 MHz, Set VBW \geq 3 RBW, Detector = RMS
- c) Sweep time = auto, trigger set to "free run".
- d) Trace average at least 100 traces in power averaging mode.
- e) Record the max value and add 10 log (1/duty cycle)

2. For U-NII-3 band:

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 500 kHz, Set VBW \geq 3 RBW, Detector = RMS
- c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- d) Sweep time = auto, trigger set to "free run".
- e) Trace average at least 100 traces in power averaging mode.
- f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Transmitter mode

Test Results: Please refer to Appendix A

Directional gain and the maximum power spectral density limit.

Frequency (MHz)	Antenna Gain (dBi)				Directional gain (dBi)		FCC Limit	
	Ant .0	Ant .1	Ant .2	Ant .3	Power	PSD	Power (dBm)	PSD (dBm/MHz or dBm/500kHz)
U-NII-1	5.26	4.61	5.05	4.74	10.94	10.94	25.06	12.06
U-NII-2A	5.26	4.61	5.05	4.74	10.94	10.94	19.06	6.06
U-NII-2C	5.26	4.61	5.05	4.74	10.94	10.94	19.06	6.06
U-NII-3	5.26	4.61	5.05	4.74	10.94	10.94	25.06	25.06
U-NII-4	5.26	4.61	5.05	4.74	10.94	10.94	36 (EIRP)	20 (EIRP)

Unequal antenna gains, with equal transmit powers. Directional gain is to be computed as follows:

If transmit signals are correlated, then

Directional gain = $10 \log[(10^G1/20 + 10^G2/20 + \dots + 10^GN/20)^2 / NANT] \text{dBi}$ [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6)

FCC 47 CFR Part 15 Subpart C Section 15.209/205

Test Method: KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

1. Limits of Radiated Emission and Band edge Measurement

Radiated emissions that fall in the restricted bands must comply with the general emissions limits in 15.209(a) as below table. Other emissions shall be at least 20 dB below the highest level of the desired power.

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

2. Limits of Unwanted Emission Out of the Restricted Bands

Applicable To	Limit	
789033 D02 General U-NII Test Procedures New Rules v01r04	Field Strength at 3 m	
	PK: 74 (dB μ V/m)	AV: 54 (dB μ V/m)
Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
FCC Part 15.407 (b)(1)	PK: -27 (dBm/MHz)	PK: 74 (dB μ V/m)
FCC Part 15.407 (b)(2)	PK: -27 (dBm/MHz)	PK: 74 (dB μ V/m)
FCC Part 15.407 (b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dB μ V/m)
FCC Part 15.407 (b)(4)	27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;	PK: 68.2 (dB μ V/m)
	15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;	
	10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges;	
	-27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.	

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.3

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

1. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
6. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Remark:

- a) The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
- b) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
- c) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for RMS Average (Duty cycle < 98 %) for Average detection (AV) at frequency above 1 GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
- d) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle $\geq 98\%$) or $\geq 1/T$ (duty cycle is $< 98\%$) for Average detection (AV) at frequency above 1 GHz.
- e) All modes of operation were investigated and the worst-case emissions are reported.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888
UTTR-RF-FCCPART15.407-V1.3


Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

Radiated Emission Test Data (9 KHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

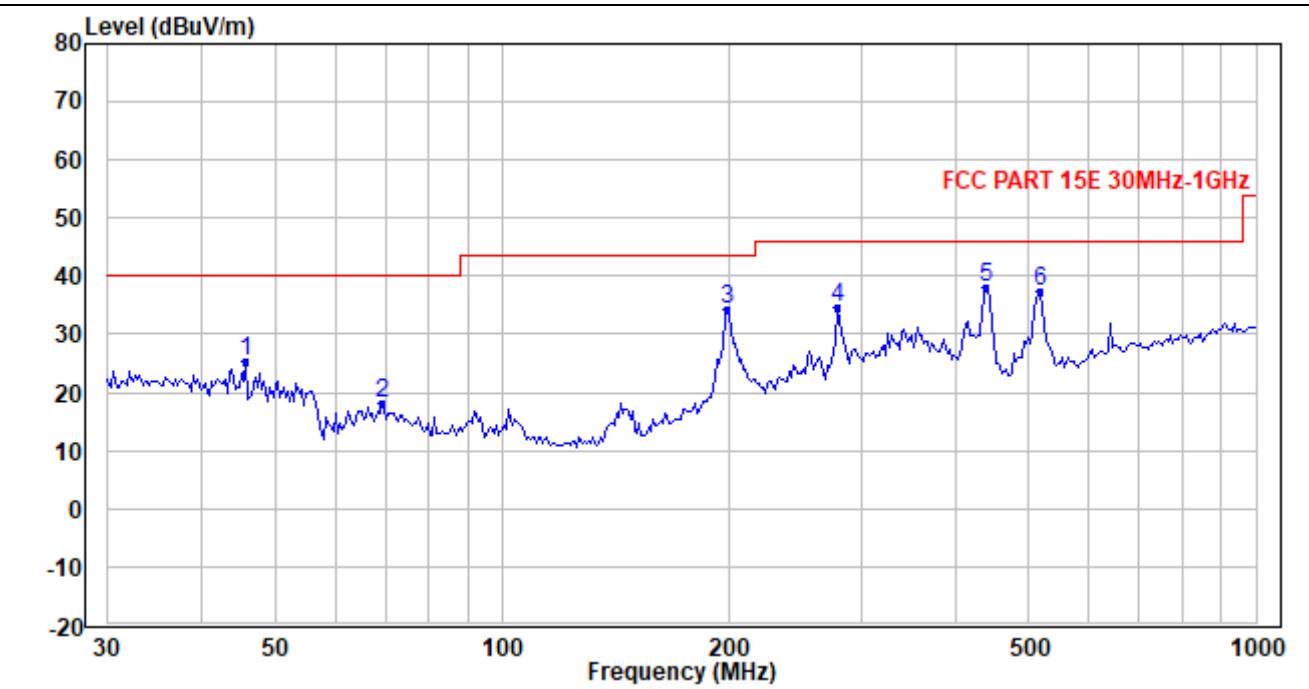Radiated Emission Test Data (30 MHz ~ 1 GHz):**Worst-Case Configuration (IEEE 802.11ac-VHT80_5775MHz)****Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	45.733	37.28	-11.97	25.31	40.00	-14.69	QP
2	69.230	35.42	-17.24	18.18	40.00	-21.82	QP
3	198.642	44.77	-10.32	34.45	43.50	-9.05	QP
4	278.331	42.23	-7.70	34.53	46.00	-11.47	QP
5	439.473	41.86	-3.86	38.00	46.00	-8.00	QP
6	516.565	39.54	-2.06	37.48	46.00	-8.52	QP

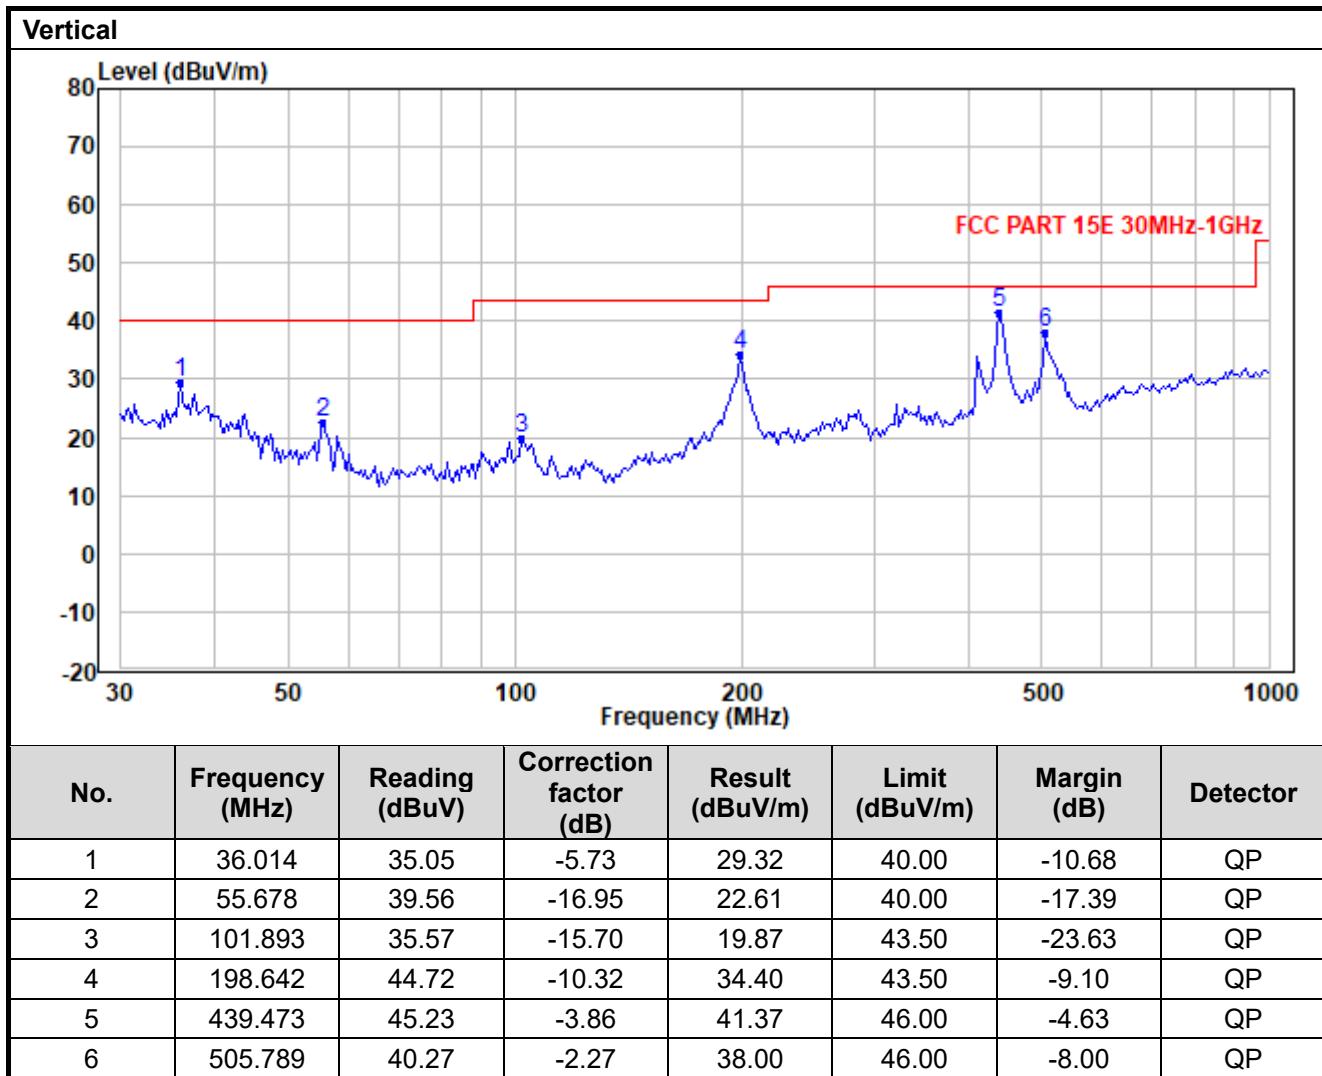

Radiated Emission Test Data (Above 1GHz):

No.	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Ant. 0 IEEE 802.11a_Channel 36								
1	10360	25.0	6.2	31.1	54	-22.9	Average	Horizontal
2	10360	37.5	6.2	43.6	68.2	-24.6	Peak	Horizontal
3	15540	22.3	11.1	33.4	54	-20.6	Average	Horizontal
4	15540	34.6	11.1	45.7	74	-28.3	Peak	Horizontal
5	10360	25.5	6.2	31.6	54	-22.4	Average	Vertical
6	10360	37.5	6.2	43.6	68.2	-24.6	Peak	Vertical
7	15540	22.4	11.1	33.5	54	-20.5	Average	Vertical
8	15540	35.0	11.1	46.1	74	-27.9	Peak	Vertical
SISO_Ant. 0 IEEE 802.11a_Channel 44								
1	10440	26.0	6.0	32.1	54	-22.0	Average	Horizontal
2	10440	38.2	6.0	44.2	68.2	-24.0	Peak	Horizontal
3	15660	22.6	11.1	33.7	54	-20.3	Average	Horizontal
4	15660	34.5	11.1	45.5	74	-28.5	Peak	Horizontal
5	10440	26.6	6.0	32.7	54	-21.3	Average	Vertical
6	10440	39.0	6.0	45.1	68.2	-23.2	Peak	Vertical
7	15660	22.7	11.1	33.8	54	-20.2	Average	Vertical
8	15660	35.4	11.1	46.5	74	-27.5	Peak	Vertical
SISO_Ant. 0 IEEE 802.11a_Channel 48								
1	10480	24.7	6.0	30.6	54	-23.4	Average	Horizontal
2	10480	36.4	6.0	42.4	68.2	-25.8	Peak	Horizontal
3	15720	22.3	11.1	33.4	54	-20.7	Average	Horizontal
4	15720	35.2	11.1	46.3	74	-27.7	Peak	Horizontal
5	10480	25.5	6.0	31.5	54	-22.5	Average	Vertical
6	10480	38.6	6.0	44.5	68.2	-23.7	Peak	Vertical
7	15720	22.4	11.1	33.5	54	-20.5	Average	Vertical
8	15720	39.8	11.1	50.9	74	-23.1	Peak	Vertical
SISO_Ant. 0 IEEE 802.11a_Channel 52								
1	10520	24.7	5.9	30.6	54	-23.4	Average	Horizontal
2	10520	37.2	5.9	43.1	68.2	-25.1	Peak	Horizontal
3	15780	22.5	11.1	33.6	54	-20.4	Average	Horizontal
4	15780	35.8	11.1	46.8	74	-27.2	Peak	Horizontal
5	10520	25.7	5.9	31.7	54	-22.3	Average	Vertical
6	10520	38.4	5.9	44.3	68.2	-23.9	Peak	Vertical
7	15780	23.5	11.1	34.6	54	-19.4	Average	Vertical
8	15780	41.7	11.1	52.8	74	-21.2	Peak	Vertical

No.	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Ant. 0_IIEEE 802.11a_Channel 60								
1	10600	24.3	5.8	30.1	54	-23.9	Average	Horizontal
2	10600	36.3	5.8	42.2	74	-31.9	Peak	Horizontal
3	15900	21.6	11.1	32.6	54	-21.4	Average	Horizontal
4	15900	33.7	11.1	44.8	74	-29.3	Peak	Horizontal
5	10600	25.8	5.8	31.7	54	-22.3	Average	Vertical
6	10600	40.1	5.8	46.0	74	-28.0	Peak	Vertical
7	15900	24.7	11.1	35.8	54	-18.3	Average	Vertical
8	15900	40.2	11.1	51.3	74	-22.7	Peak	Vertical
SISO_Ant. 0_IIEEE 802.11a_Channel 64								
1	10640	24.9	5.8	30.7	54	-23.4	Average	Horizontal
2	10640	38.8	5.8	44.5	74	-29.5	Peak	Horizontal
3	15960	21.7	11.0	32.7	54	-21.3	Average	Horizontal
4	15960	34.6	11.0	45.6	74	-28.4	Peak	Horizontal
5	10640	26.8	5.8	32.6	54	-21.4	Average	Vertical
6	10640	45.9	5.8	51.7	74	-22.3	Peak	Vertical
7	15960	22.5	11.0	33.5	54	-20.5	Average	Vertical
8	15960	39.3	11.0	50.3	74	-23.7	Peak	Vertical
SISO_Ant. 0_IIEEE 802.11a_Channel 100								
1	11000	29.0	5.3	34.4	54	-19.6	Average	Horizontal
2	11000	45.1	5.3	50.4	74	-23.6	Peak	Horizontal
3	16500	21.6	12.2	33.7	54	-20.3	Average	Horizontal
4	16500	33.7	12.2	45.9	68.2	-22.3	Peak	Horizontal
5	11000	31.6	5.3	37.0	54	-17.1	Average	Vertical
6	11000	47.7	5.3	53.0	74	-21.0	Peak	Vertical
7	16500	21.7	12.2	33.9	54	-20.1	Average	Vertical
8	16500	34.7	12.2	46.8	68.2	-21.4	Peak	Vertical
SISO_Ant. 0_IIEEE 802.11a_Channel 120								
1	11200	28.8	5.2	34.0	54	-20.0	Average	Horizontal
2	11200	44.5	5.2	49.7	74	-24.3	Peak	Horizontal
3	16800	21.3	12.7	34.0	54	-20.0	Average	Horizontal
4	16800	33.7	12.7	46.4	68.2	-21.9	Peak	Horizontal
5	11200	33.2	5.2	38.4	54	-15.7	Average	Vertical
6	11200	48.8	5.2	54.0	74	-20.0	Peak	Vertical
7	16800	21.6	12.7	34.2	54	-19.8	Average	Vertical
8	16800	33.2	12.7	45.9	68.2	-22.3	Peak	Vertical

No.	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Ant. 0_IIEEE 802.11a_Channel 140								
1	11400	26.9	5.1	32.0	54	-22.0	Average	Horizontal
2	11400	40.2	5.1	45.3	74	-28.7	Peak	Horizontal
3	17100	21.0	13.3	34.4	54	-19.6	Average	Horizontal
4	17100	33.0	13.3	46.3	68.2	-21.9	Peak	Horizontal
5	11400	29.1	5.1	34.2	54	-19.9	Average	Vertical
6	11400	44.0	5.1	49.0	74	-25.0	Peak	Vertical
7	17100	21.2	13.3	34.5	54	-19.5	Average	Vertical
8	17100	32.9	13.3	46.2	68.2	-22.0	Peak	Vertical
SISO_Ant. 0_IIEEE 802.11a_Channel 144								
1	11440	24.8	5.0	29.8	54	-24.2	Average	Horizontal
2	11440	38.2	5.0	43.2	74	-30.8	Peak	Horizontal
3	17160	20.9	13.6	34.5	54	-19.5	Average	Horizontal
4	17160	33.1	13.6	46.7	68.2	-21.5	Peak	Horizontal
5	11440	27.5	5.0	32.5	54	-21.5	Average	Vertical
6	11440	45.3	5.0	50.3	74	-23.7	Peak	Vertical
7	17160	21.1	13.6	34.6	54	-19.4	Average	Vertical
8	17160	33.1	13.6	46.6	68.2	-21.6	Peak	Vertical
SISO_Ant. 0_IIEEE 802.11a_Channel 149								
1	11490	23.8	5.0	28.8	54	-25.2	Average	Horizontal
2	11490	36.3	5.0	41.3	74	-32.7	Peak	Horizontal
3	17235	20.6	13.8	34.4	54	-19.6	Average	Horizontal
4	17235	33.3	13.8	47.1	68.2	-21.1	Peak	Horizontal
5	11490	24.8	5.0	29.8	54	-24.2	Average	Vertical
6	11490	41.9	5.0	46.9	74	-27.1	Peak	Vertical
7	17235	20.7	13.8	34.6	54	-19.4	Average	Vertical
8	17235	33.2	13.8	47.1	68.2	-21.1	Peak	Vertical
SISO_Ant. 0_IIEEE 802.11a_Channel 157								
1	11570	24.6	5.0	29.6	54	-24.5	Average	Horizontal
2	11570	37.2	5.0	42.1	74	-31.9	Peak	Horizontal
3	17355	21.1	14.3	35.3	54	-18.7	Average	Horizontal
4	17355	33.2	14.3	47.5	68.2	-20.7	Peak	Horizontal
5	11570	27.2	5.0	32.2	54	-21.8	Average	Vertical
6	11570	42.0	5.0	47.0	74	-27.1	Peak	Vertical
7	17355	21.2	14.3	35.5	54	-18.5	Average	Vertical
8	17355	33.6	14.3	47.8	68.2	-20.4	Peak	Vertical

No.	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Ant. 0_IIEEE 802.11a_Channel 165								
1	11650	24.9	4.9	29.9	54	-24.2	Average	Horizontal
2	11650	36.9	4.9	41.8	74	-32.2	Peak	Horizontal
3	17475	20.9	14.7	35.6	54	-18.4	Average	Horizontal
4	17475	33.4	14.7	48.1	68.2	-20.1	Peak	Horizontal
5	11650	27.4	4.9	32.3	54	-21.7	Average	Vertical
6	11650	44.4	4.9	49.3	74	-24.7	Peak	Vertical
7	17475	20.9	14.7	35.6	54	-18.4	Average	Vertical
8	17475	33.5	14.7	48.2	68.2	-20.1	Peak	Vertical
SISO_Ant. 0_IIEEE 802.11a_Channel 169								
1	11690	48.15	2.77	50.9	74	-23.1	Average	Horizontal
2	11690	33.36	2.77	36.1	74	-37.9	Peak	Horizontal
3	17535	42.91	10.82	53.7	68.2	-14.5	Average	Horizontal
4	17535	30.58	10.82	41.4	54	-12.6	Peak	Horizontal
5	11690	51.22	2.77	54.0	74	-20.0	Average	Vertical
6	11690	33.55	2.77	36.3	54	-17.7	Peak	Vertical
7	17535	47.21	10.82	58.0	68.2	-10.2	Average	Vertical
8	17535	32.16	10.82	43.0	54	-11.0	Peak	Vertical
SISO_Ant. 0_IIEEE 802.11a_Channel 173								
1	11730	45.11	2.76	47.9	74	-26.1	Average	Horizontal
2	11730	32.73	2.76	35.5	54	-18.5	Peak	Horizontal
3	17595	43.35	10.92	54.3	68.2	-13.9	Average	Horizontal
4	17595	29.96	10.92	40.9	54	-13.1	Peak	Horizontal
5	11730	45.75	2.76	48.5	74	-25.5	Average	Vertical
6	11730	33.09	2.76	35.9	54	-18.2	Peak	Vertical
7	17595	42.84	10.92	53.8	68.2	-14.4	Average	Vertical
8	17595	29.96	10.92	40.9	54	-13.1	Peak	Vertical
SISO_Ant. 0_IIEEE 802.11a_Channel 177								
1	11770	46.28	2.73	49.0	74	-25.0	Average	Horizontal
2	11770	32.86	2.73	35.6	54	-18.4	Peak	Horizontal
3	17655	41.96	11.03	53.0	68.2	-15.2	Average	Horizontal
4	17655	29.74	11.03	40.8	54	-13.2	Peak	Horizontal
5	11770	46.28	2.73	49.0	74	-25.0	Average	Vertical
6	11770	33.15	2.73	35.9	54	-18.1	Peak	Vertical
7	17655	42.05	11.03	53.1	68.2	-15.1	Average	Vertical
8	17655	29.78	11.03	40.8	54	-13.2	Peak	Vertical

No.	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Ant. 1_IEEE 802.11a_Channel 36								
1	10360	24.8	6.2	31.0	54	-23.0	Average	Horizontal
2	10360	37.9	6.2	44.1	68.2	-24.1	Peak	Horizontal
3	15540	22.2	11.1	33.3	54	-20.7	Average	Horizontal
4	15540	35.0	11.1	46.1	74	-27.9	Peak	Horizontal
5	10360	25.0	6.2	31.1	54	-22.9	Average	Vertical
6	10360	37.1	6.2	43.2	68.2	-25.0	Peak	Vertical
7	15540	22.3	11.1	33.4	54	-20.6	Average	Vertical
8	15540	33.8	11.1	44.9	74	-29.1	Peak	Vertical
SISO_Ant. 1_IEEE 802.11a_Channel 44								
1	10440	26.0	6.0	32.1	54	-22.0	Average	Horizontal
2	10440	38.0	6.0	44.1	68.2	-24.1	Peak	Horizontal
3	15660	22.4	11.1	33.5	54	-20.5	Average	Horizontal
4	15660	34.7	11.1	45.8	74	-28.2	Peak	Horizontal
5	10440	26.3	6.0	32.3	54	-21.7	Average	Vertical
6	10440	38.1	6.0	44.2	68.2	-24.0	Peak	Vertical
7	15660	22.5	11.1	33.6	54	-20.4	Average	Vertical
8	15660	34.9	11.1	46.0	74	-28.0	Peak	Vertical
SISO_Ant. 1_IEEE 802.11a_Channel 48								
1	10480	24.5	6.0	30.5	54	-23.5	Average	Horizontal
2	10480	36.8	6.0	42.8	68.2	-25.4	Peak	Horizontal
3	15720	22.0	11.1	33.1	54	-20.9	Average	Horizontal
4	15720	34.5	11.1	45.6	74	-28.5	Peak	Horizontal
5	10480	25.1	6.0	31.0	54	-23.0	Average	Vertical
6	10480	37.1	6.0	43.0	68.2	-25.2	Peak	Vertical
7	15720	22.3	11.1	33.4	54	-20.7	Average	Vertical
8	15720	34.6	11.1	45.7	74	-28.3	Peak	Vertical
SISO_Ant. 1_IEEE 802.11a_Channel 52								
1	10520	24.5	5.9	30.5	54	-23.5	Average	Horizontal
2	10520	36.5	5.9	42.4	68.2	-25.8	Peak	Horizontal
3	15780	22.1	11.1	33.1	54	-20.9	Average	Horizontal
4	15780	35.2	11.1	46.3	74	-27.7	Peak	Horizontal
5	10520	24.9	5.9	30.8	54	-23.2	Average	Vertical
6	10520	37.4	5.9	43.4	68.2	-24.8	Peak	Vertical
7	15780	22.5	11.1	33.6	54	-20.4	Average	Vertical
8	15780	37.7	11.1	48.7	74	-25.3	Peak	Vertical

No.	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Ant. 1_IEEE 802.11a_Channel 60								
1	10600	23.3	5.8	29.1	54	-24.9	Average	Horizontal
2	10600	34.6	5.8	40.5	74	-33.5	Peak	Horizontal
3	15900	21.3	11.1	32.4	54	-21.6	Average	Horizontal
4	15900	33.5	11.1	44.5	74	-29.5	Peak	Horizontal
5	10600	23.4	5.8	29.2	54	-24.8	Average	Vertical
6	10600	35.6	5.8	41.4	74	-32.6	Peak	Vertical
7	15900	21.5	11.1	32.5	54	-21.5	Average	Vertical
8	15900	33.8	11.1	44.8	74	-29.2	Peak	Vertical
SISO_Ant. 1_IEEE 802.11a_Channel 64								
1	10640	23.2	5.8	29.0	54	-25.0	Average	Horizontal
2	10640	35.2	5.8	41.0	74	-33.0	Peak	Horizontal
3	15960	21.4	11.0	32.4	54	-21.6	Average	Horizontal
4	15960	33.6	11.0	44.6	74	-29.4	Peak	Horizontal
5	10640	23.3	5.8	29.1	54	-24.9	Average	Vertical
6	10640	35.3	5.8	41.1	74	-32.9	Peak	Vertical
7	15960	22.0	11.0	33.0	54	-21.0	Average	Vertical
8	15960	36.2	11.0	47.3	74	-26.7	Peak	Vertical
SISO_Ant. 1_IEEE 802.11a_Channel 100								
1	11000	25.3	5.3	30.6	54	-23.4	Average	Horizontal
2	11000	37.6	5.3	43.0	74	-31.1	Peak	Horizontal
3	16500	21.5	12.2	33.6	54	-20.4	Average	Horizontal
4	16500	34.0	12.2	46.1	68.2	-22.1	Peak	Horizontal
5	11000	25.8	5.3	31.1	54	-22.9	Average	Vertical
6	11000	37.3	5.3	42.6	74	-31.4	Peak	Vertical
7	16500	21.8	12.2	34.0	54	-20.0	Average	Vertical
8	16500	34.1	12.2	46.2	68.2	-22.0	Peak	Vertical
SISO_Ant. 1_IEEE 802.11a_Channel 120								
1	11200	24.3	5.2	29.5	54	-24.6	Average	Horizontal
2	11200	36.6	5.2	41.8	74	-32.2	Peak	Horizontal
3	16800	21.5	12.7	34.1	54	-19.9	Average	Horizontal
4	16800	34.2	12.7	46.8	68.2	-21.4	Peak	Horizontal
5	11200	24.6	5.2	29.8	54	-24.2	Average	Vertical
6	11200	37.8	5.2	43.0	74	-31.0	Peak	Vertical
7	16800	21.6	12.7	34.2	54	-19.8	Average	Vertical
8	16800	33.3	12.7	45.9	68.2	-22.3	Peak	Vertical