



TEST REPORT

Applicant Name : Grandstream Networks, Inc.
Address : 126 Brookline Ave, 3rd Floor Boston, MA 02215, USA
Manufacturer Name : Grandstream Networks, Inc.
Address : 126 Brookline Ave, 3rd Floor Boston, MA 02215, USA
Report Number : SZNS220124-03493E-RFA
FCC ID: YZZGWN7664LR
IC 11964A-GWN7664LR

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2, FEBRUARY 2017

Sample Description

Product Type: High-Performance Outdoor Long-Range Wi-Fi 6 Access Point
Model No.: GWN7664LR
Multiple Model(s) No.: N/A
Trade Mark: GRANDSTREAM
Date Received: 2022/01/24
Report Date: 2022/07/05

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ting Lü
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" .

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EQUIPMENT MODIFICATIONS.....	6
EUT EXERCISE SOFTWARE.....	6
SUPPORT EQUIPMENT LIST AND DETAILS.....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP.....	8
SUMMARY OF TEST RESULTS.....	9
TEST EQUIPMENT LIST.....	10
FCC §15.247 (I) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD.....	12
RESULT.....	12
RSS-102 § 4 – EXPOSURE LIMITS.....	14
APPLICABLE STANDARD.....	14
§15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD.....	16
ANTENNA CONNECTOR CONSTRUCTION.....	17
§15.207 (A) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS.....	18
APPLICABLE STANDARD.....	18
EUT SETUP.....	19
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE.....	19
CORRECTED FACTOR & MARGIN CALCULATION.....	20
TEST DATA.....	20
§15.205, §15.209, §15.247(D) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS.....	23
APPLICABLE STANDARD.....	23
EUT SETUP.....	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	24
TEST PROCEDURE.....	24
CORRECTED FACTOR & MARGIN CALCULATION.....	25
TEST DATA.....	25
§15.247 (A)(2) & RSS-GEN§6.7 RSS-247 § 5.2 (A) 99% OCCUPIED BANDWIDTH & 6 DB EMISSION BANDWIDTH.....	36
APPLICABLE STANDARD.....	36
TEST PROCEDURE.....	36
TEST DATA.....	37
§15.247(B)(3) & RSS-247 § 5.4(D) MAXIMUM CONDUCTED OUTPUT POWER.....	38

APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	39
§15.247(D) & RSS-247 § 5.5 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
§15.247(E) & RSS-247 § 5.2 (B) POWER SPECTRAL DENSITY	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41
APPENDIX	42
APPENDIX A: DTS BANDWIDTH	42
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	49
APPENDIX C: MAXIMUM CONDUCTED AVERAGE OUTPUT POWER	56
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	60
APPENDIX E: BAND EDGE MEASUREMENTS	116
APPENDIX F: DUTY CYCLE	151

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	GWN7664LR
FVIN	1.0.21.3
Frequency Range	Wi-Fi: 2412-2462MHz
Mode	802.11b/g/n20/n40/ax20/ax40
Maximum Conducted Average Output Power	802.11b: 26.2dBm, 802.11g: 23.12dBm, 802.11n20: 24.14dBm,802.11n40: 23.54dBm 802.11ax20: 23.07dBm,802.11ax40: 22.56dBm
Modulation Technique	Wi-Fi: DSSS, OFDM, OFDMA
Antenna Specification*	3.5dBi (It is provided by the applicant)
Beam-forming	Support(only for n/ax mode)
Voltage Range	DC 48V from POE
Sample serial number	CE&RE: SZNS220124-03493E-RF-S2 RF Conducted: SZNS220124-03493E-RF-S1 (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules and RSS-GEN issue 5, February 2021 amendment 2 and RSS-247, Issue 2, February 2017 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-GEN issue 5, February 2021 amendment 2 and RSS-247, Issue 2, February 2017.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi, 11 channels was provided to test.

Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, 802.11n-HT20, 802.11 ax20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40, 802.11 ax40 mode, EUT was tested with Channel 3, 6 and 9.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“QRCT 4”^{*} was use to the EUT tested. The software and power level was provided by the applicant.

The device was tested with the worst case was performed as below:

Test Mode	Data rate	RuSize	RuIndex	Power Level*		
				Low Channel	Middle Channel	High Channel
802.11b	1 Mbps	N/A	N/A	20	20	20
802.11g	6 Mbps	N/A	N/A	15	18	15
802.11n20	MCS0	N/A	N/A	16	18	16
802.11n40	MCS0	N/A	N/A	15	18	15
11AX20	MCS0	26Tone	RU0	15	17	15
		52Tone	RU37	15	17	15
		106Tone	RU54	15	17	15
		242Tone	RU61	15	17	15
11AX40	MCS0	26Tone	RU0	14	16	14
		52Tone	RU37	14	16	14
		106Tone	RU56	14	16	14
		242Tone	RU61	14	16	14
		484Tone	RU65	14	16	14

The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

The device support SISO and MIMO, for n/ax mode, the MIMO mode support beamforming, the SISO/MIMO and beamforming/nonbeamforming modes have same parameter, which was declared by applicant. The MIMO/beamforming mode was selected to test as the worst case, unless otherwise was stated.

All the antenna ports have the same power level.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
GOSPELL	POE	G0720-480-050	G0720-480-050
DELL	Notebook	Latitude E6410	11429208685
HIKVISION	Router	DS-3WR03-E	10021642429

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded detachable RJ45 Cable	1.5	POE	EUT
Un-Shielding Detachable RJ45 Cable	5.0	EUT	Notebook
Un-shielded Un-detachable AC Cable	1.2	LISN	POE
Unshielded detachable RJ45 cable	5.0	POE	Router

Block Diagram of Test Setup

For conducted emission:

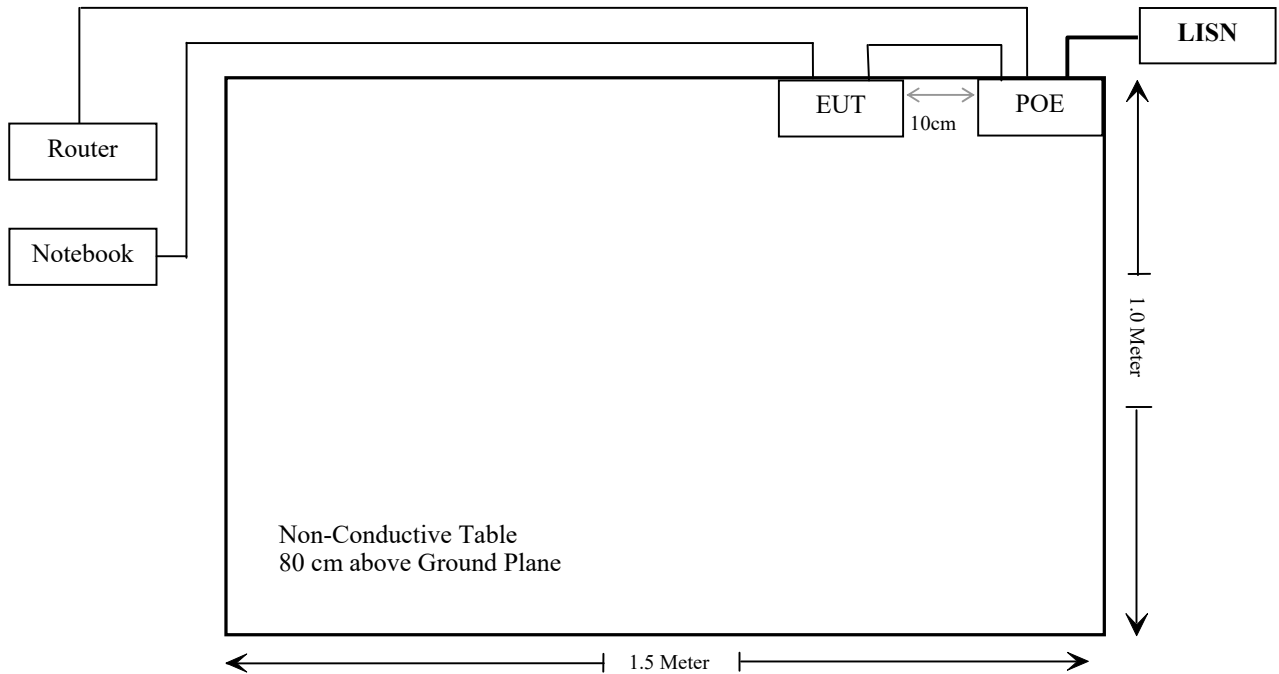

For radiated emission:

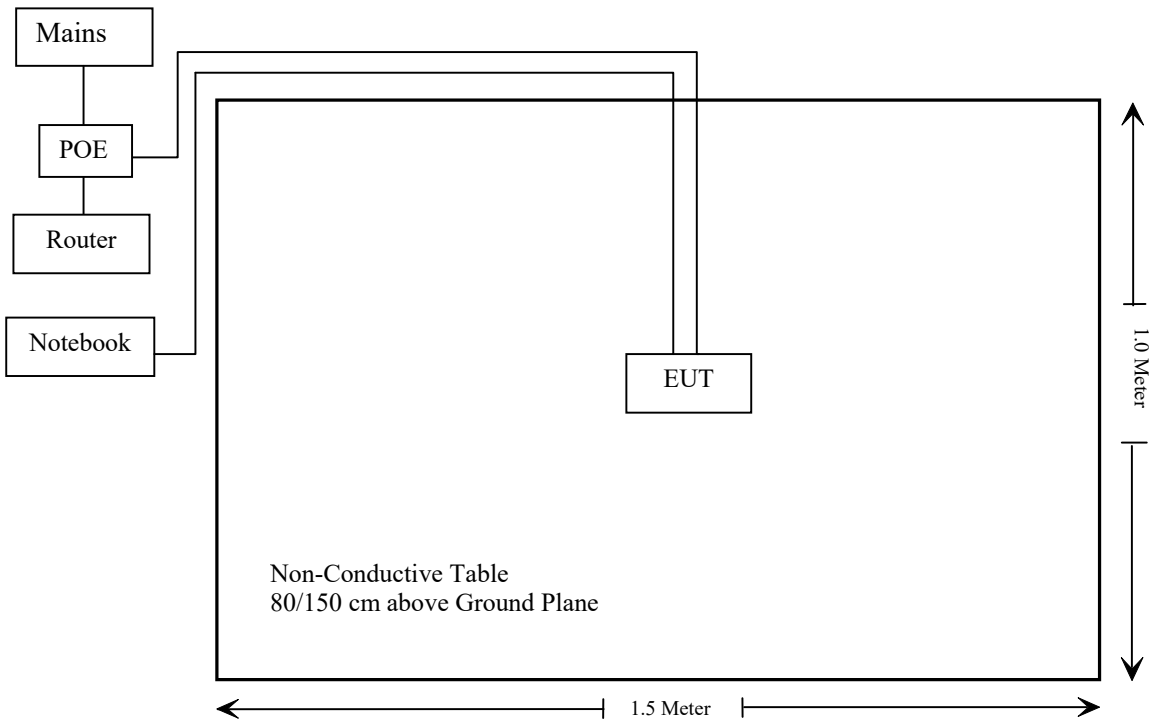

SUMMARY OF TEST RESULTS

FCC Rules	RSS-247 & RSS-Gen Rules	Description of Test	Result
§15.247 (i), §2.1091	RSS-102 § 4	Maximum Permissible Exposure(MPE) & RF Exposure Limit	Compliant
§15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§15.207 (a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 & RSS-247 § 5.5	Spurious Emissions	Compliant
§15.247 (a)(2)	RSS- Gen§6.7 RSS-247 § 5.2 (a)	99% Occupied Bandwidth & 6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	RSS-247 § 5.4(d)	Maximum Conducted Output Power	Compliant
§15.247(d)	RSS-247 § 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	RSS-247 § 5.2 (b)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/07/06	2022/07/05
HP	20dB Attenuator	8491A	53857	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	
Unknown	RF Cable	Unknown	Unknown	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

a)

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462 (non-beamforming)	3.5	2.24	27.0	501.19	25	0.143	1
2412-2462 (beamforming)	9.5	8.91	25.0	316.23	25	0.359	1
5180-5240	9.5	8.91	23.0	199.53	25	0.226	1
5260-5320	9.5	8.91	19.0	79.43	25	0.090	1
5500-5720	9.5	8.91	19.0	79.43	25	0.090	1
5745-5825	9.5	8.91	24.0	251.19	25	0.285	1

- Note:
1. The tune up conducted power was declared by the applicant.
 2. The 2.4G Wi-Fi can transmit at the same time with the 5G Wi-Fi.
 3. For the 2.4G Wi-Fi, as it can support the beam-forming function, so the directional antenna gain should add the $10\lg 4$, $3.5\text{dBi}+10\lg 4=9.5\text{dBi}$.
 4. For the 5G Wi-Fi, as it can support the beam-forming function, so the directional antenna gain should add the $10\lg 4$, $3.5\text{dBi}+10\lg 4=9.5\text{dBi}$.

Simultaneous transmitting consideration (worst case):

The ratio= $\text{MPE}_{2.4\text{G Wi-Fi}}/\text{limit}+\text{MPE}_{5\text{G Wi-Fi}}/\text{limit}=0.359+0.285=0.644 < 1.0$, so simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 25cm from nearby persons.

Result: Compliant.

RSS-102 § 4 – EXPOSURE LIMITS

Applicable Standard

According to RSS-102 §4:

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)				
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ f ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ f ^{0.25}	0.1540/ f ^{0.25}	8.944/ f ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	0.02619 f ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ f ^{1.2}
150000-300000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000/f ^{1.2}

Note: f is frequency in MHz.
 * Based on nerve stimulation (NS).
 ** Based on specific absorption rate (SAR).

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Frequency (MHz)	Antenna Gain		Turn up Power		Evaluation Distance (m)	Power Density (W/m ²)	MPE Limit (W/m ²)
	(dBi)	(numeric)	(dBm)	(W)			
2412-2462 (non-beamforming)	3.5	2.24	27.0	0.501	0.25	1.430	5.37
2412-2462 (beamforming)	9.5	8.91	25.0	0.316	0.25	3.587	5.37
5180-5240	9.5	8.91	13.5	0.022	0.25	0.250	9.05
5260-5320 (non-beamforming)	3.5	2.24	19.0	0.079	0.25	0.225	9.14
5260-5320 (beamforming)	9.5	8.91	13.0	0.020	0.25	0.227	9.14
5500-5720	9.5	8.91	19.0	0.079	0.25	0.897	9.43
5745-5825	9.5	8.91	24.0	0.251	0.25	2.849	9.71

- Note: 1. The tune up conducted power was declared by the applicant.
2. The 2.4G Wi-Fi can transmit at the same time with the 5G Wi-Fi.
3. For the 2.4G Wi-Fi, as it can support the beam-forming function, so the directional antenna gain should add the $10\lg 4, 3.5\text{dBi}+10\lg 4=9.5\text{dBi}$.
4. For the 5G Wi-Fi, as it can support the beam-forming function, so the directional antenna gain should add the $10\lg 4, 3.5\text{dBi}+10\lg 4=9.5\text{dBi}$.

Simultaneous transmitting consideration (worst case):

The ratio= $\text{MPE}_{2.4\text{G Wi-Fi}}/\text{limit}+\text{MPE}_{5\text{G Wi-Fi}}/\text{limit}=3.587/5.37+2.849/9.71=0.96 < 1.0$, so simultaneous exposure is compliant.

To maintain compliance with the ISEDC's RF exposure guidelines, place the equipment at least 25cm from nearby persons.

Result: Compliant.

§15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- b. Antenna must be permanently attached to the unit.
- c. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has four external antennas with unique antenna connector for 2.4G Wi-Fi, Please refer to the EUT photos.

Type	Antenna Gain	Impedance	Frequency Range
External	3.5 dBi	50 Ω	2412-2462MHz

Result: Compliant.

§ 15.207 (a) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207 (a), RSS-Gen § 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

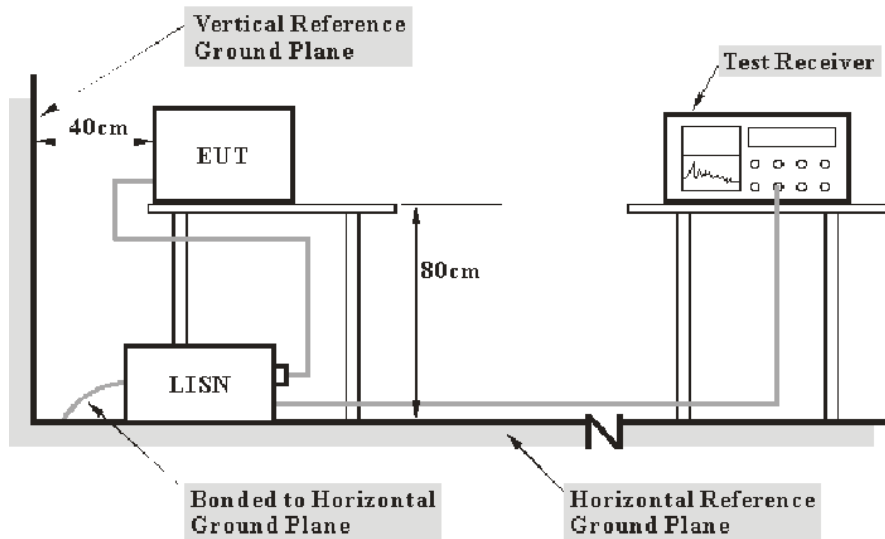

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Reading level} + \text{Factor} \end{aligned}$$

Test Data


Environmental Conditions

Temperature:	23 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Caro Hu on 2022-03-08.

EUT operation mode: Transmitting (worst case at 802.11n20 mode, low channel)


AC 120V/60 Hz, Line

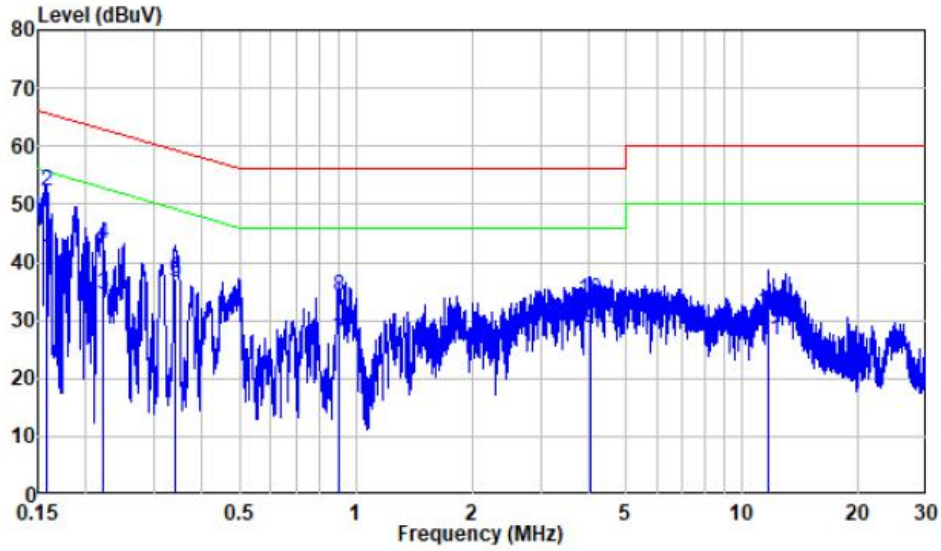

Site : Shielding Room
 Condition: Line
 Mode : 2.4G
 Model : GWN7664LR
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.158	9.80	30.83	40.63	55.59	-14.96	Average
2	0.158	9.80	42.44	52.24	65.59	-13.35	QP
3	0.221	9.80	24.69	34.49	52.79	-18.30	Average
4	0.221	9.80	33.30	43.10	62.79	-19.69	QP
5	0.339	9.80	26.86	36.66	49.22	-12.56	Average
6	0.339	9.80	27.37	37.17	59.22	-22.05	QP
7	0.900	9.81	16.79	26.60	46.00	-19.40	Average
8	0.900	9.81	24.17	33.98	56.00	-22.02	QP
9	4.025	9.84	18.82	28.66	46.00	-17.34	Average
10	4.025	9.84	23.79	33.63	56.00	-22.37	QP
11	11.698	9.92	16.53	26.45	50.00	-23.55	Average
12	11.698	9.92	21.35	31.27	60.00	-28.73	QP

AC 120V/60 Hz, Neutral

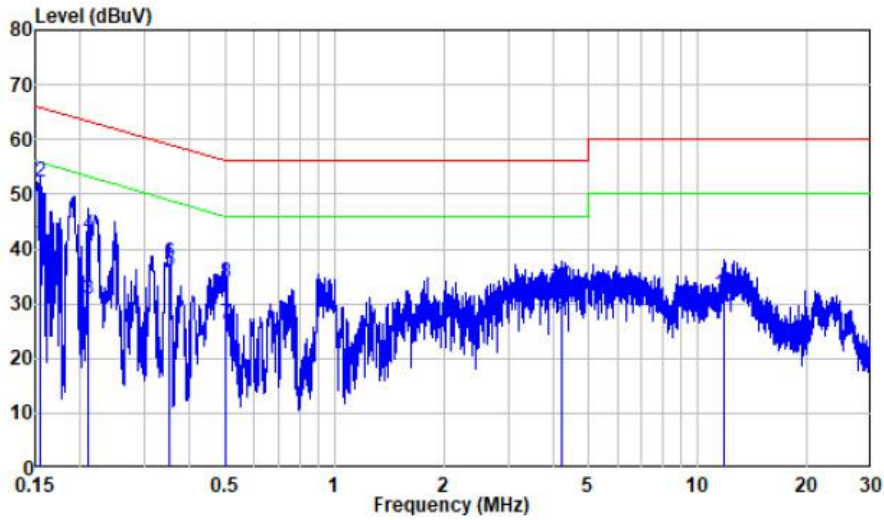

Site : Shielding Room
 Condition: Neutral
 Mode : 2.4G
 Model : GWN7664LR
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.155	9.80	31.25	41.05	55.71	-14.66	Average
2	0.155	9.80	42.45	52.25	65.71	-13.46	QP
3	0.210	9.80	21.12	30.92	53.21	-22.29	Average
4	0.210	9.80	32.73	42.53	63.21	-20.68	QP
5	0.349	9.80	26.19	35.99	48.98	-12.99	Average
6	0.349	9.80	27.73	37.53	58.98	-21.45	QP
7	0.501	9.80	16.53	26.33	46.00	-19.67	Average
8	0.501	9.80	23.96	33.76	56.00	-22.24	QP
9	4.196	9.85	18.17	28.02	46.00	-17.98	Average
10	4.196	9.85	23.43	33.28	56.00	-22.72	QP
11	11.791	10.02	17.53	27.55	50.00	-22.45	Average
12	11.791	10.02	21.79	31.81	60.00	-28.19	QP

§15.205, §15.209, §15.247(d) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


According to RSS-GEN § 8.10 & RSS-247 § 5.5


Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply: (a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD). (b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6. (c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

EUT Setup

Below 1 GHz:

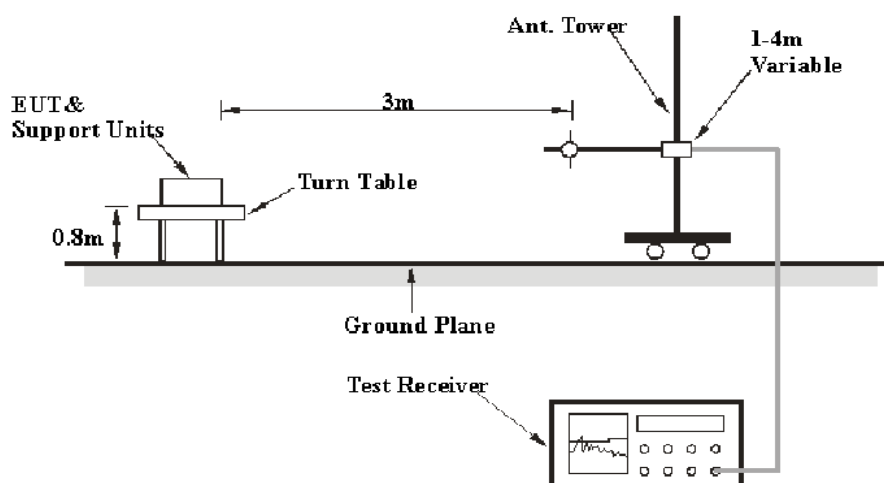

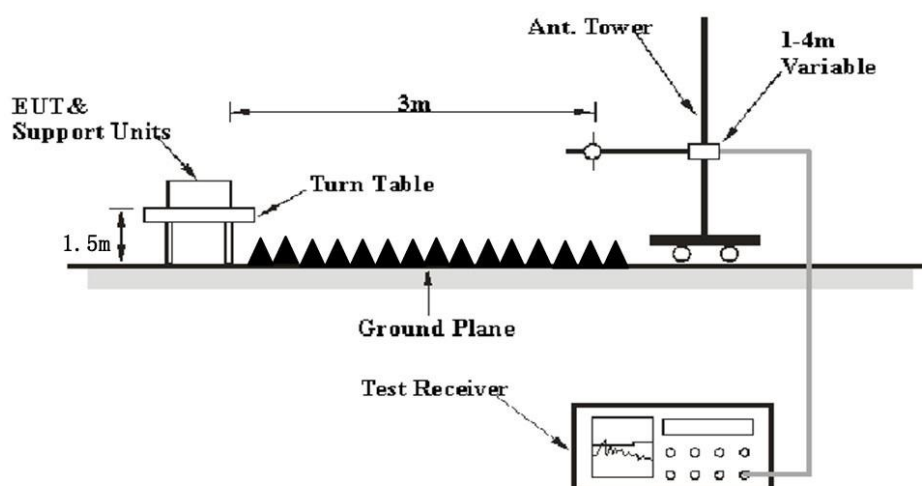Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013 & RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247 & RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

Corrected Factor & Margin Calculation

The Corrected Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin/Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin/over limit of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over limit} &= \text{Corrected Amplitude/Level} - \text{Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	20~28 °C
Relative Humidity:	51~58 %
ATM Pressure:	101.0 kPa


The testing was performed by Caro Hu on 2022-03-07 for below 1GHz and Nick Fang from 2022-02-16 to 2022-04-25 for above 1GHz.

Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded)

30 MHz~1 GHz: (worst case at 802.11n20 mode, low channel)

Note: When the test result of Peak was less than the limit of QP, just the peak value was recorded.


Horizontal

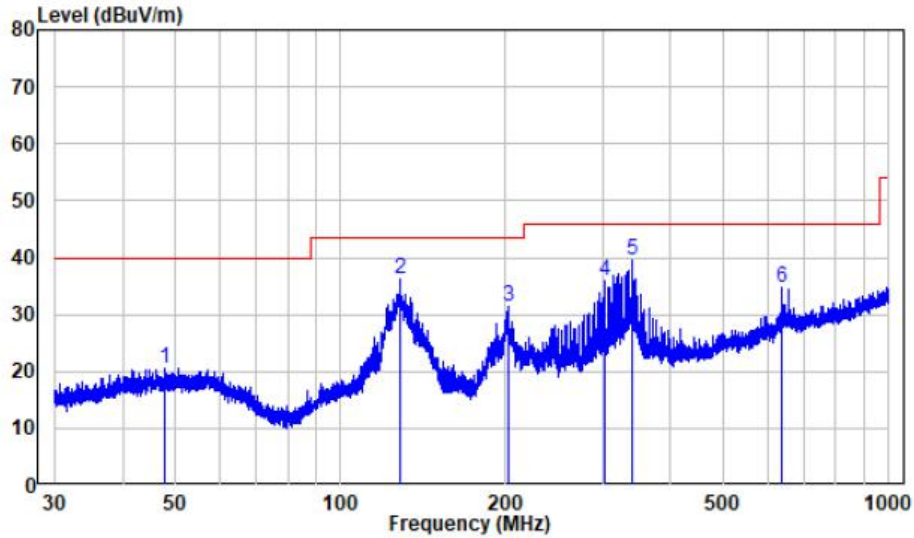

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : SZNS220124-03493E-RF
 Test Mode: 2.4G WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.617	-10.00	30.58	20.58	40.00	-19.42	Peak
2	128.001	-14.70	50.81	36.11	43.50	-7.39	Peak
3	201.658	-11.55	43.07	31.52	43.50	-11.98	Peak
4	304.076	-9.10	45.12	36.02	46.00	-9.98	Peak
5	339.291	-7.46	46.92	39.46	46.00	-6.54	Peak
6	640.050	-1.92	36.57	34.65	46.00	-11.35	Peak

Vertical

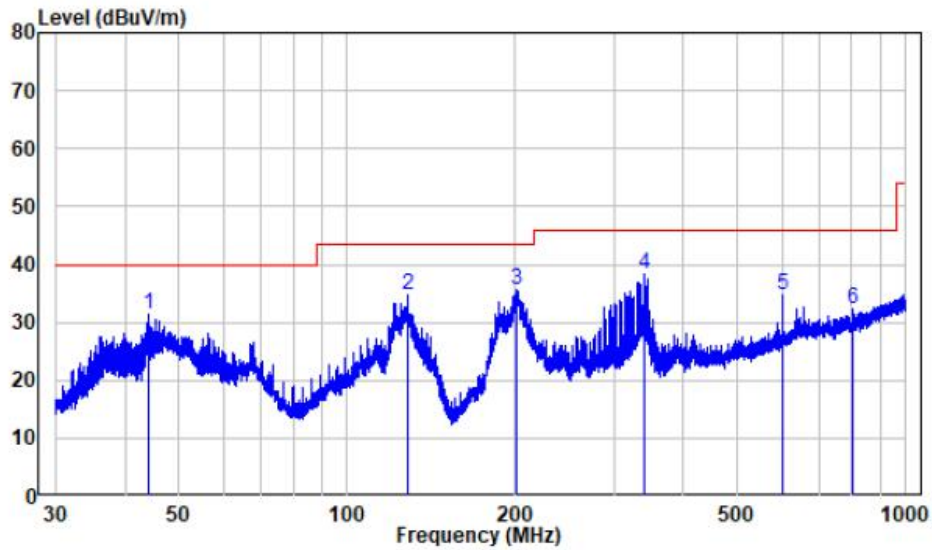

Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZNS220124-03493E-RF
 Test Mode: 2.4G WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	44.043	-9.90	41.22	31.32	40.00	-8.68	Peak
2	128.001	-14.70	49.33	34.63	43.50	-8.87	Peak
3	200.776	-11.47	47.08	35.61	43.50	-7.89	Peak
4	339.291	-7.46	45.91	38.45	46.00	-7.55	Peak
5	600.110	-2.43	37.22	34.79	46.00	-11.21	Peak
6	802.841	-0.40	32.64	32.24	46.00	-13.76	Peak

1 GHz-25 GHz:

Frequency (MHz)	Receiver		Turn-Table Angle Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247&RSS-247	
	Reading (dBμV)	Detector (PK/QP/AV)		Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11b MIMO(Worst case)									
Low Channel 2412MHz									
2310	68.61	PK	8	1.2	H	-7.24	61.37	74	-12.63
2310	54.62	AV	8	1.2	H	-7.24	47.38	54	-6.62
2310	68.27	PK	144	2.3	V	-7.24	61.03	74	-12.97
2310	54.55	AV	144	2.3	V	-7.24	47.31	54	-6.69
2390	71.49	PK	260	2.1	H	-7.22	64.27	74	-9.73
2390	58.25	AV	260	2.1	H	-7.22	51.03	54	-2.97
2390	70.47	PK	151	1.1	V	-7.22	63.25	74	-10.75
2390	57.10	AV	151	1.1	V	-7.22	49.88	54	-4.12
4824	59.88	PK	134	1.2	H	-3.53	56.35	74	-17.65
4824	51.81	AV	134	1.2	H	-3.53	48.28	54	-5.72
4824	59.86	PK	175	2.0	V	-3.53	56.33	74	-17.67
4824	52.93	AV	175	2.0	V	-3.53	49.40	54	-4.60
Middle Channel 2437MHz									
4874	59.20	PK	273	2.1	H	-3.42	55.78	74	-18.22
4874	51.20	AV	273	2.1	H	-3.42	47.78	54	-6.22
4874	60.54	PK	273	1.1	V	-3.42	57.12	74	-16.88
4874	53.32	AV	273	1.1	V	-3.42	49.90	54	-4.10
High Channel 2462MHz									
2483.5	72.02	PK	325	1.6	H	-7.20	64.82	74	-9.18
2483.5	58.51	AV	325	1.6	H	-7.20	51.31	54	-2.69
2483.5	70.14	PK	261	1.6	V	-7.20	62.94	74	-11.06
2483.5	56.53	AV	261	1.6	V	-7.20	49.33	54	-4.67
2500	68.52	PK	16	1.6	H	-7.18	61.34	74	-12.66
2500	56.02	AV	16	1.6	H	-7.18	48.84	54	-5.16
2500	68.94	PK	274	2	V	-7.18	61.76	74	-12.24
2500	55.91	AV	274	2	V	-7.18	48.73	54	-5.27
4924	58.80	PK	273	2.0	H	-3.16	55.64	74	-18.36
4924	50.19	AV	273	2.0	H	-3.16	47.03	54	-6.97
4924	59.40	PK	117	1.0	V	-3.16	56.24	74	-17.76
4924	52.02	AV	117	1.0	V	-3.16	48.86	54	-5.14

Frequency (MHz)	Receiver		Turn-Table Angle Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247&RSS-247	
	Reading (dBμV)	Detector (PK/QP/AV)		Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11g MIMO(Worst case)									
Low Channel 2412MHz									
2310	68.21	PK	359	1.8	H	-7.24	60.97	74	-13.03
2310	54.42	AV	359	1.8	H	-7.24	47.18	54	-6.82
2310	68.71	PK	212	2	V	-7.24	61.47	74	-12.53
2310	54.52	AV	212	2	V	-7.24	47.28	54	-6.72
2390	72.30	PK	294	2.2	H	-7.22	65.08	74	-8.92
2390	58.31	AV	294	2.2	H	-7.22	51.09	54	-2.91
2390	70.71	PK	78	1.6	V	-7.22	63.49	74	-10.51
2390	57.24	AV	78	1.6	V	-7.22	50.02	54	-3.98
4824	54.82	PK	337	1.3	H	-3.53	51.29	74	-22.71
4824	55.02	PK	116	2.0	V	-3.53	51.49	74	-22.51
Middle Channel 2437MHz									
4874	55.63	PK	79	1.2	H	-3.42	52.21	74	-21.79
4874	55.86	PK	0	1.8	V	-3.42	52.44	74	-21.56
High Channel 2462MHz									
2483.5	70.64	PK	307	2	H	-7.20	63.44	74	-10.56
2483.5	57.12	AV	307	2	H	-7.20	49.92	54	-4.08
2483.5	69.46	PK	161	1.9	V	-7.20	62.26	74	-11.74
2483.5	56.95	AV	161	1.9	V	-7.20	49.75	54	-4.25
2500	68.62	PK	2	1.7	H	-7.18	61.44	74	-12.56
2500	55.93	AV	2	1.7	H	-7.18	48.75	54	-5.25
2500	69.16	PK	149	2.5	V	-7.18	61.98	74	-12.02
2500	55.99	AV	149	2.5	V	-7.18	48.81	54	-5.19
4924	55.02	PK	179	1.5	H	-3.16	51.86	74	-22.14
4924	55.27	PK	340	1.4	V	-3.16	52.11	74	-21.89

Frequency (MHz)	Receiver		Turn-Table Angle Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247&RSS-247	
	Reading (dBμV)	Detector (PK/QP/AV)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11n20 MIMO + No-BF (Worst case)									
Low Channel 2412MHz									
2310	68.26	PK	270	2.1	H	-7.24	61.02	74	-12.98
2310	54.61	AV	270	2.1	H	-7.24	47.37	54	-6.63
2310	67.93	PK	28	2.4	V	-7.24	60.69	74	-13.31
2310	54.41	AV	28	2.4	V	-7.24	47.17	54	-6.83
2390	73.83	PK	200	2.4	H	-7.22	66.61	74	-7.39
2390	60.11	AV	200	2.4	H	-7.22	52.89	54	-1.11
2390	72.33	PK	123	1.8	V	-7.22	65.11	74	-8.89
2390	57.85	AV	123	1.8	V	-7.22	50.63	54	-3.37
4824	55.78	PK	63	1.5	H	-3.53	52.25	74	-21.75
4824	54.33	PK	209	1.7	V	-3.53	50.80	74	-23.20
Middle Channel 2437MHz									
4874	57.00	PK	212	1.2	H	-3.42	53.58	74	-20.42
4874	55.65	PK	94	2.4	V	-3.42	52.23	74	-21.77
High Channel 2462MHz									
2483.5	74.99	PK	37	1	H	-7.20	67.79	74	-6.21
2483.5	58.99	AV	37	1	H	-7.20	51.79	54	-2.21
2483.5	71.89	PK	24	1.9	V	-7.20	64.69	74	-9.31
2483.5	57.41	AV	24	1.9	V	-7.20	50.21	54	-3.79
2500	69.01	PK	59	1.3	H	-7.18	61.83	74	-12.17
2500	55.53	AV	59	1.3	H	-7.18	48.35	54	-5.65
2500	68.92	PK	152	1.7	V	-7.18	61.74	74	-12.26
2500	55.59	AV	152	1.7	V	-7.18	48.41	54	-5.59
4924	55.04	PK	327	1.2	H	-3.16	51.88	74	-22.12
4924	54.07	PK	45	1.2	V	-3.16	50.91	74	-23.09

Frequency (MHz)	Receiver		Turn-Table Angle Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247&RSS-247	
	Reading (dBμV)	Detector (PK/QP/AV)		Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n40 MIMO + No-BF (Worst case)									
Low Channel 2422MHz									
2310	68.03	PK	75	1.2	H	-7.24	60.79	74	-13.21
2310	54.57	AV	75	1.2	H	-7.24	47.33	54	-6.67
2310	68.32	PK	28	2.2	V	-7.24	61.08	74	-12.92
2310	54.54	AV	28	2.2	V	-7.24	47.30	54	-6.70
2390	72.96	PK	273	1.7	H	-7.22	65.74	74	-8.26
2390	59.65	AV	273	1.7	H	-7.22	52.43	54	-1.57
2390	72.18	PK	213	1.3	V	-7.22	64.96	74	-9.04
2390	57.78	AV	213	1.3	V	-7.22	50.56	54	-3.44
4844	55.33	PK	11	2.3	H	-3.54	51.79	74	-22.21
4844	55.18	PK	1	1.9	V	-3.54	51.64	74	-22.36
Middle Channel 2437MHz									
4874	55.72	PK	148	1.5	H	-3.42	52.30	74	-21.70
4874	55.44	PK	315	2.1	V	-3.42	52.02	74	-21.98
High Channel 2452MHz									
2483.5	74.84	PK	10	1.5	H	-7.20	67.64	74	-6.36
2483.5	59.34	AV	10	1.5	H	-7.20	52.14	54	-1.86
2483.5	71.76	PK	20	1.9	V	-7.20	64.56	74	-9.44
2483.5	57.42	AV	20	1.9	V	-7.20	50.22	54	-3.78
2500	69.29	PK	129	1.6	H	-7.18	62.11	74	-11.89
2500	55.59	AV	129	1.6	H	-7.18	48.41	54	-5.59
2500	68.58	PK	223	1.7	V	-7.18	61.4	74	-12.60
2500	55.50	AV	223	1.7	V	-7.18	48.32	54	-5.68
4904	55.85	PK	22	1.5	H	-3.26	52.59	74	-21.41
4904	55.40	PK	115	2.1	V	-3.26	52.14	74	-21.86

Frequency (MHz)	Receiver		Turn-Table Angle Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247&RSS-247	
	Reading (dBμV)	Detector (PK/QP/AV)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11ax20 MIMO + No-BF (Worst case)									
Low Channel 2412MHz_26Tone_RU0(Worst Case)									
2310	67.80	PK	32	1.1	H	-7.24	60.56	74	-13.44
2310	54.62	AV	32	1.1	H	-7.24	47.38	54	-6.62
2310	68.71	PK	61	1	V	-7.24	61.47	74	-12.53
2310	54.40	AV	61	1	V	-7.24	47.16	54	-6.84
2390	73.60	PK	71	1.2	H	-7.22	66.38	74	-7.62
2390	59.63	AV	71	1.2	H	-7.22	52.41	54	-1.59
2390	72.18	PK	279	2.1	V	-7.22	64.96	74	-9.04
2390	57.70	AV	279	2.1	V	-7.22	50.48	54	-3.52
Low Channel 2412MHz_242Tone_RU61(Worst Case)									
4824	55.41	PK	187	2.0	H	-3.53	51.88	74	-22.12
4824	54.89	PK	280	1.2	V	-3.53	51.36	74	-22.64
Middle Channel 2437MHz_242Tone_RU61(Worst Case)									
4874	56.09	PK	351	1.3	H	-3.42	52.67	74	-21.33
4874	55.56	PK	117	1.4	V	-3.42	52.14	74	-21.86
High Channel 2462MHz_26Tone_RU8(Worst Case)									
2483.5	74.75	PK	260	1.9	H	-7.20	67.55	74	-6.45
2483.5	60.13	AV	260	1.9	H	-7.20	52.93	54	-1.07
2483.5	71.98	PK	274	1.8	V	-7.20	64.78	74	-9.22
2483.5	57.59	AV	274	1.8	V	-7.20	50.39	54	-3.61
2500	68.63	PK	226	1.5	H	-7.18	61.45	74	-12.55
2500	55.53	AV	226	1.5	H	-7.18	48.35	54	-5.65
2500	68.45	PK	48	2	V	-7.18	61.27	74	-12.73
2500	55.50	AV	48	2	V	-7.18	48.32	54	-5.68
High Channel 2462MHz_242Tone_RU61(Worst Case)									
4924	55.79	PK	256	1.9	H	-3.16	52.63	74	-21.37
4924	55.12	PK	181	1.5	V	-3.16	51.96	74	-22.04

Frequency (MHz)	Receiver		Turn-Table Angle Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247&RSS-247	
	Reading (dBμV)	Detector (PK/QP/AV)		Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ax40 MIMO + No-BF (Worst case)									
Low Channel 2422MHz_26Tone_RU0(Worst Case)									
2310	68.68	PK	209	2.1	H	-7.24	61.44	74	-12.56
2310	54.44	AV	209	2.1	H	-7.24	47.20	54	-6.80
2310	68.00	PK	211	1.7	V	-7.24	60.76	74	-13.24
2310	54.53	AV	211	1.7	V	-7.24	47.29	54	-6.71
2390	72.77	PK	205	1.6	H	-7.22	65.55	74	-8.45
2390	59.79	AV	205	1.6	H	-7.22	52.57	54	-1.43
2390	72.16	PK	318	1.9	V	-7.22	64.94	74	-9.06
2390	57.64	AV	318	1.9	V	-7.22	50.42	54	-3.58
Low Channel 2422MHz_484Tone_RU65(Worst Case)									
4844	55.44	PK	289	1.8	H	-3.54	51.90	74	-22.10
4844	55.27	PK	348	1.5	V	-3.54	51.73	74	-22.27
Middle Channel 2437MHz_484Tone_RU65(Worst Case)									
4874	55.68	PK	147	1.9	H	-3.42	52.26	74	-21.74
4874	55.86	PK	45	1.7	V	-3.42	52.44	74	-21.56
High Channel 2452MHz_26Tone_RU17(Worst Case)									
2483.5	75.26	PK	28	2.3	H	-7.20	68.06	74	-5.94
2483.5	59.52	AV	28	2.3	H	-7.20	52.32	54	-1.68
2483.5	71.74	PK	165	2.2	V	-7.20	64.54	74	-9.46
2483.5	57.58	AV	165	2.2	V	-7.20	50.38	54	-3.62
2500	68.63	PK	83	1.6	H	-7.18	61.45	74	-12.55
2500	55.42	AV	83	1.6	H	-7.18	48.24	54	-5.76
2500	68.91	PK	7	1.2	V	-7.18	61.73	74	-12.27
2500	55.47	AV	7	1.2	V	-7.18	48.29	54	-5.71
High Channel 2452MHz_484Tone_RU65(Worst Case)									
4904	55.59	PK	183	2.2	H	-3.26	52.33	74	-21.67
4904	55.44	PK	190	1.7	V	-3.26	52.18	74	-21.82

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Corrected Factor + Reading

Margin = Absolute Level (Corrected Amplitude) – Limit


The other spurious emission which is 20dB below to the limit or in the noise floor was not recorded.

When the test result of peak was less than the limit of average, just peak values were recorded.


1-18 GHz:

Pre-scan Plots:

802.11 b Middle Channel
Horizontal

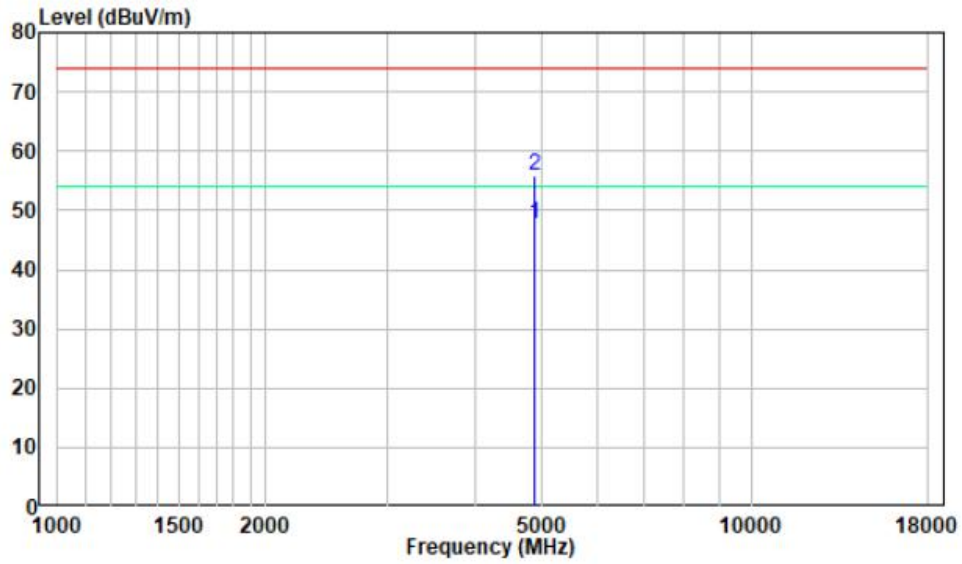


Vertical

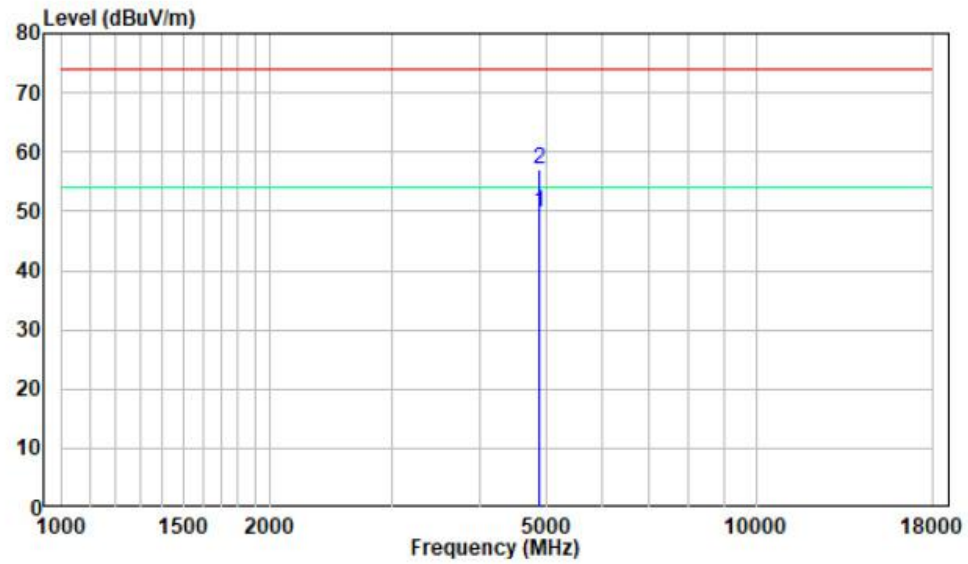


18 -25GHz:

Pre-scan Plots:

802.11 b Middle Channel
Horizontal

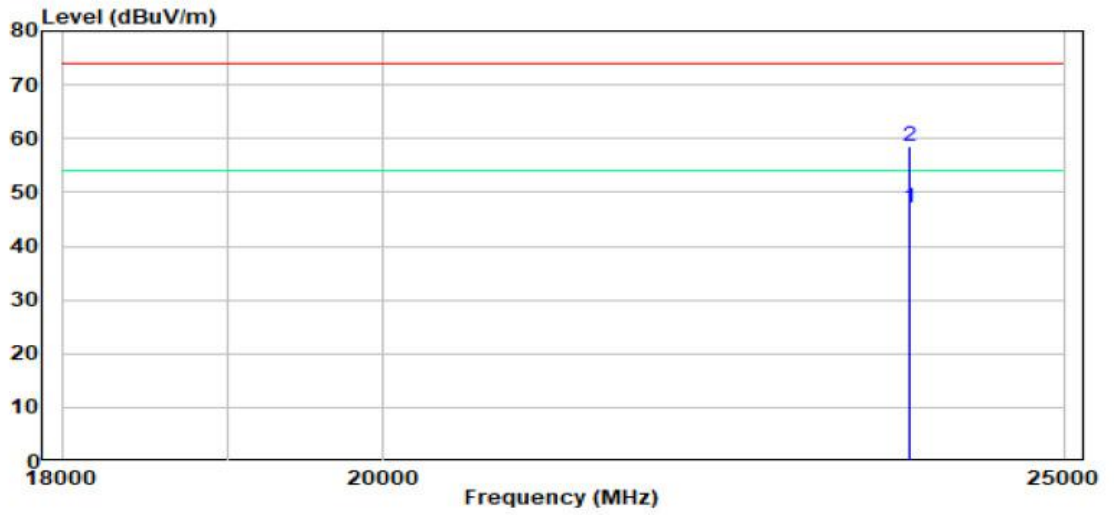

Vertical

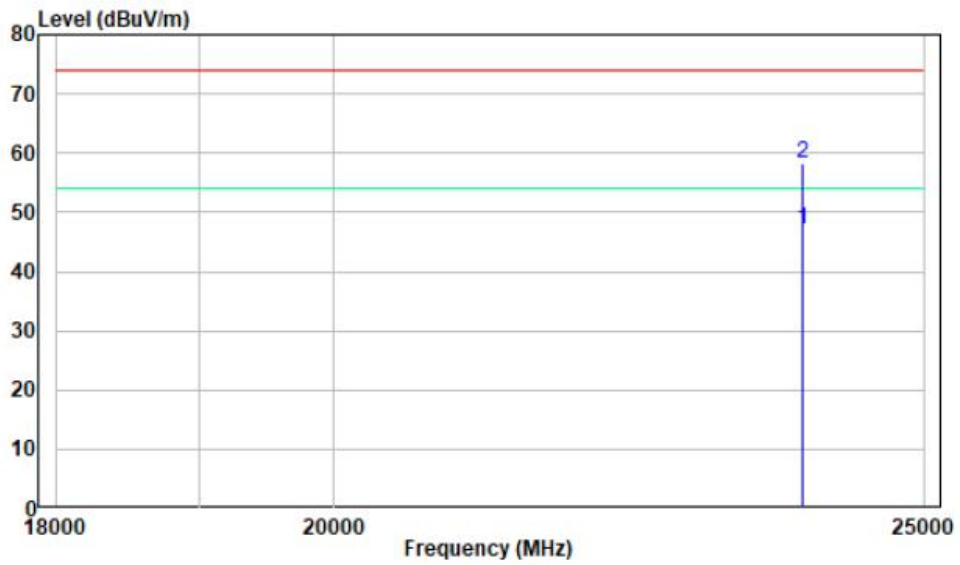

§15.247 (a)(2) & RSS-Gen §6.7 RSS-247 § 5.2 (a) 99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “6 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 6 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

The following conditions shall be observed for measuring the occupied bandwidth and 6 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 6 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 6 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data

Environmental Conditions

Temperature:	25.8~29 °C
Relative Humidity:	51~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Key Pei from 2022-04-13 to 2022-05-14.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

Note: only the worst case ANT 1 was recorded.

§15.247(b)(3) & RSS-247 § 5.4(d) MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

- d. Place the EUT on a bench and set it in transmitting mode.
- e. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- f. Add a correction factor to the display.



Note: the RF control unit has a built-in power sensor.

Test Data**Environmental Conditions**

Temperature:	25.8~29 °C
Relative Humidity:	51~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Key Pei from 2022-04-03 to 2022-06-30.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.


§ 15.247(d) & RSS-247 § 5.5 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

- g. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- h. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- i. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- j. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- k. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

Temperature:	25.8~29 °C
Relative Humidity:	51~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Key Pei from 2022-04-03 to 2022-07-05.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

§15.247(e) & RSS-247 § 5.2 (b) POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

- l. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- m. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
- n. Set the VBW $\geq 3 \times \text{RBW}$.
- o. Set the span to 1.5 times the DTS bandwidth.
- p. Detector = peak.
- q. Sweep time = auto couple.
- r. Trace mode = max hold.
- s. Allow trace to fully stabilize.
- t. Use the peak marker function to determine the maximum amplitude level within the RBW.
- u. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	25.8~29 °C
Relative Humidity:	51~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Key Pei from 2022-04-03 to 2022-06-30.

EUT operation mode: Transmitting

Test Result: Pass


Please refer to the Appendix.




APPENDIX**Appendix A: DTS Bandwidth
Test Result**




Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	7.04	0.5	PASS
	Ant1	2437	7.04	0.5	PASS
	Ant1	2462	7.08	0.5	PASS
11G-CDD	Ant1	2412	15.64	0.5	PASS
	Ant1	2437	15.92	0.5	PASS
	Ant1	2462	15.68	0.5	PASS
11N20MIMO	Ant1	2412	17.60	0.5	PASS
	Ant1	2437	17.64	0.5	PASS
	Ant1	2462	17.20	0.5	PASS
11N40MIMO	Ant1	2422	35.04	0.5	PASS
	Ant1	2437	33.92	0.5	PASS
	Ant1	2452	35.12	0.5	PASS




Test Mode	Antenna	Freq(MHz)	RuSize	RuIndex	DTS BW [MHz]	Limit[MHz]	Verdict
11AX20MIMO	Ant1	2412	242Tone	RU61	18.96	0.5	PASS
	Ant1	2437	242Tone	RU61	18.96	0.5	PASS
	Ant1	2462	242Tone	RU61	18.96	0.5	PASS
11AX40MIMO	Ant1	2422	484Tone	RU65	37.60	0.5	PASS
	Ant1	2437	484Tone	RU65	37.60	0.5	PASS
	Ant1	2452	484Tone	RU65	37.68	0.5	PASS



Test Graphs


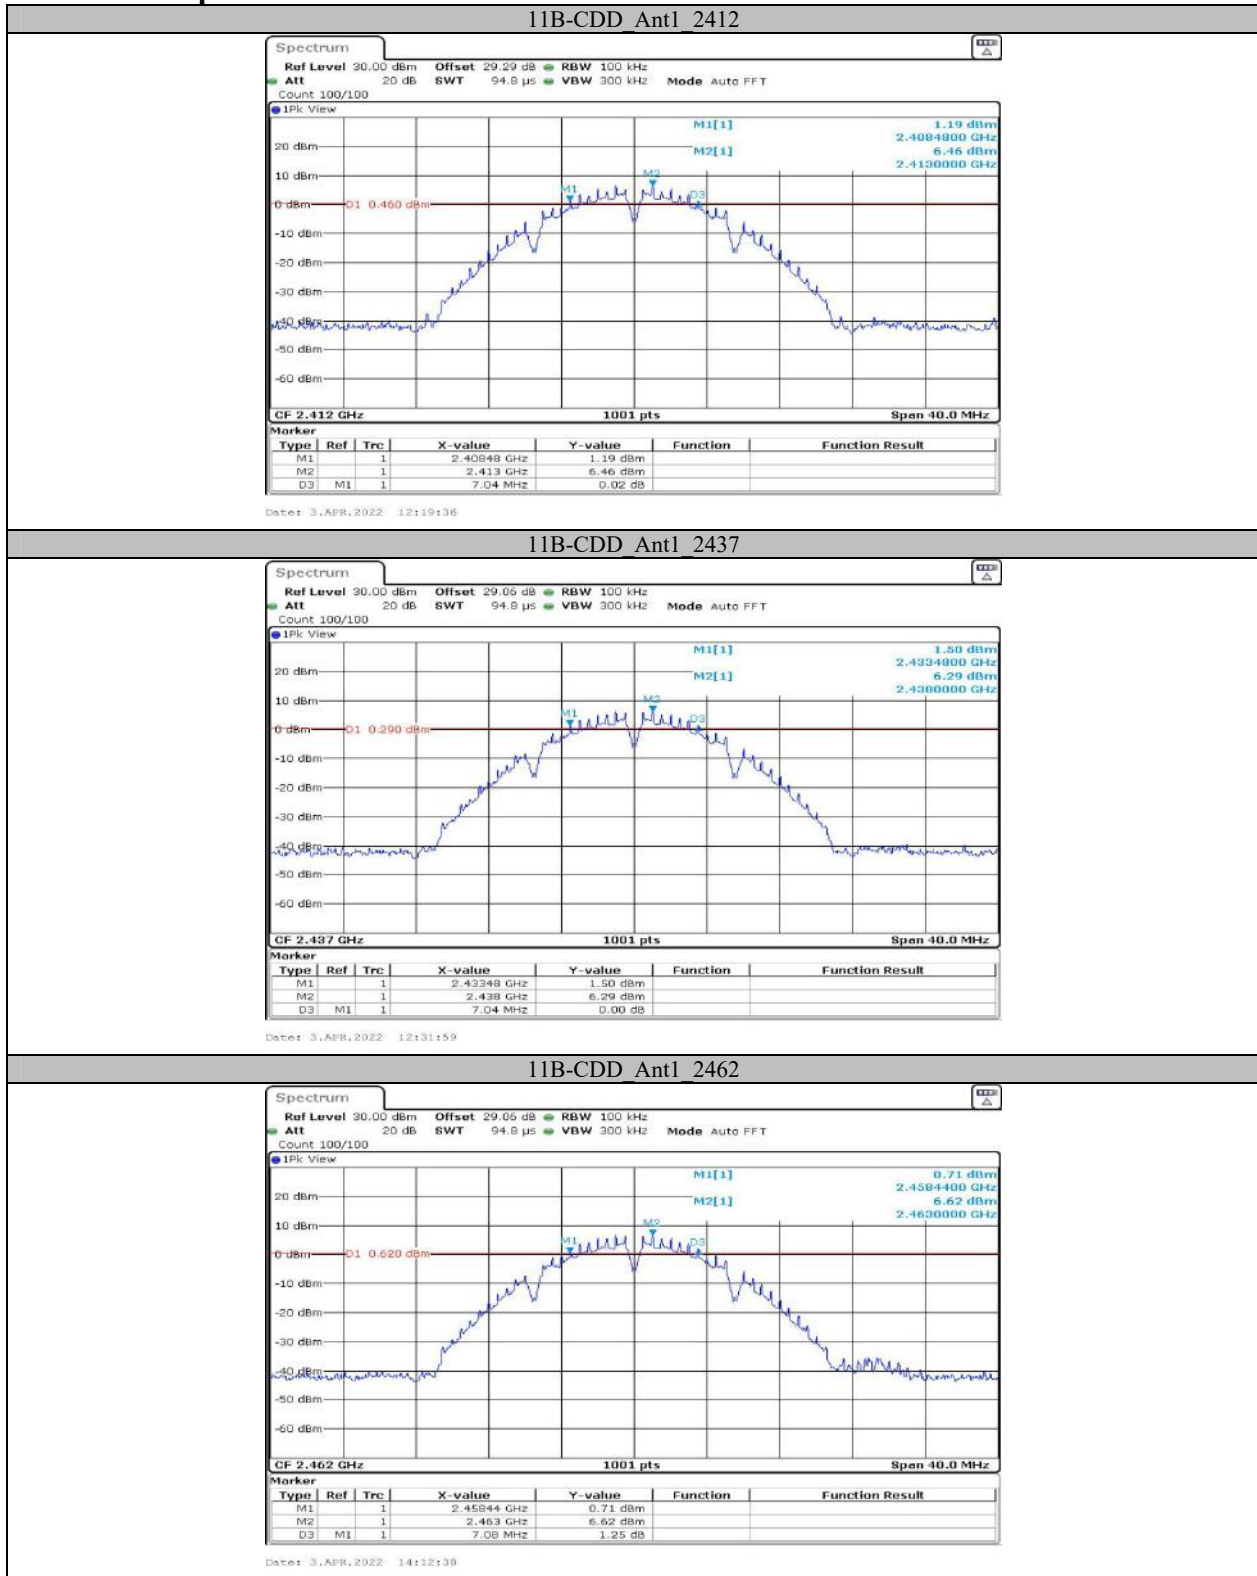


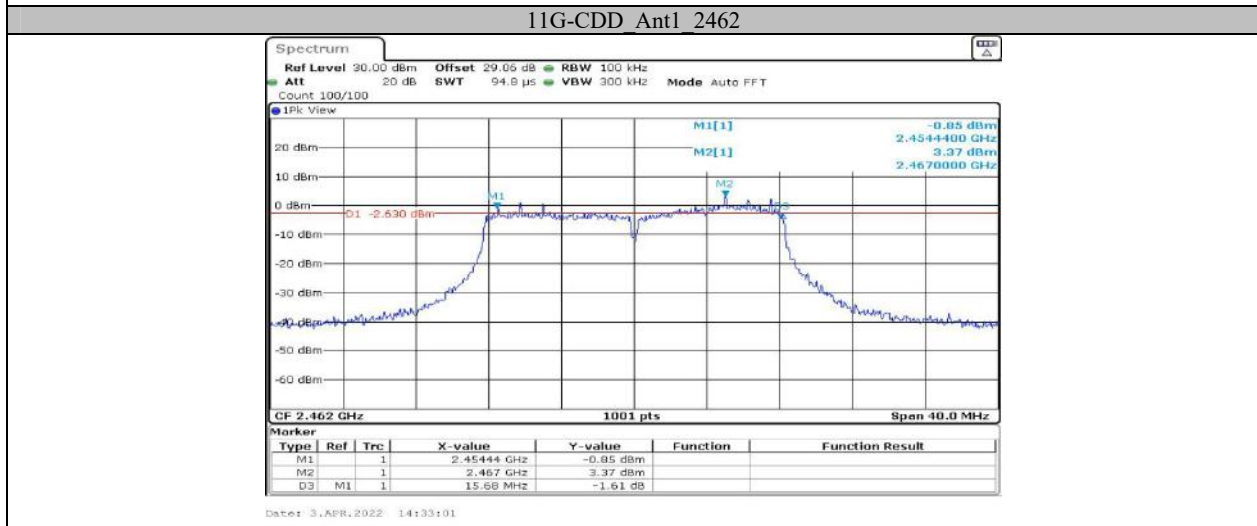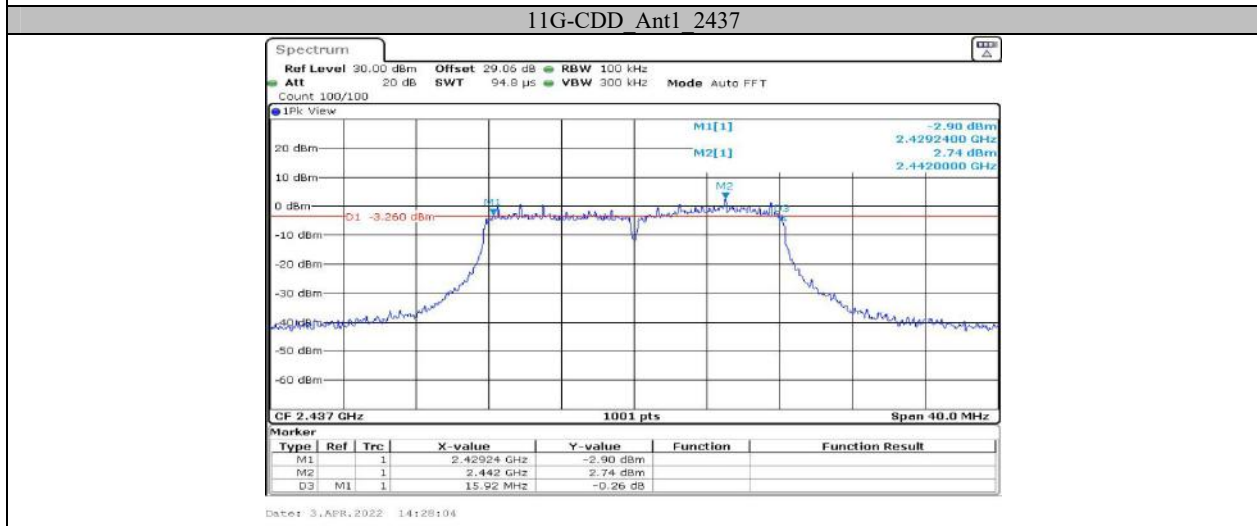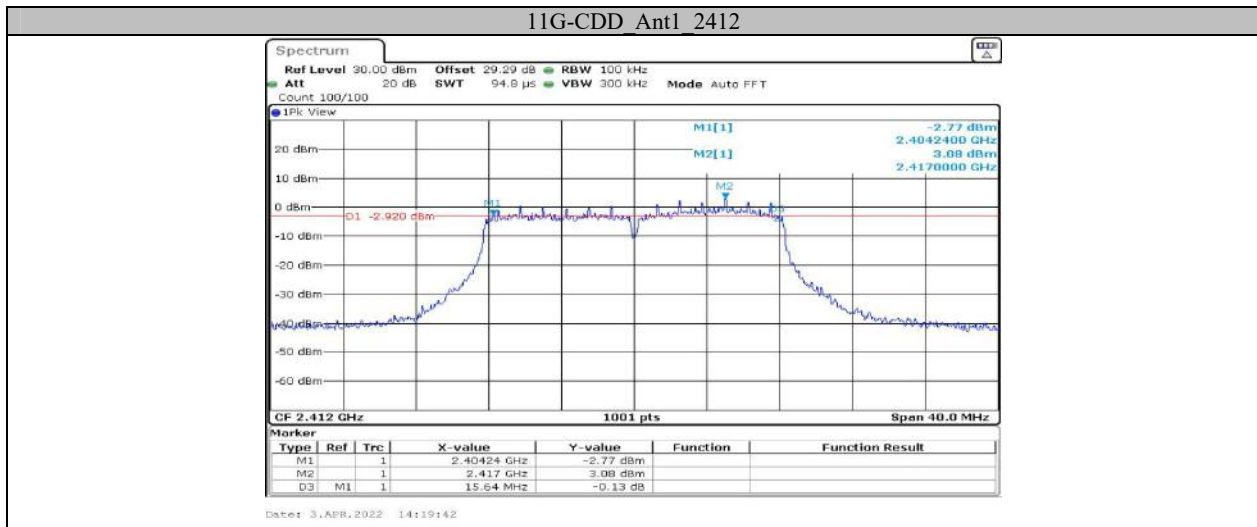

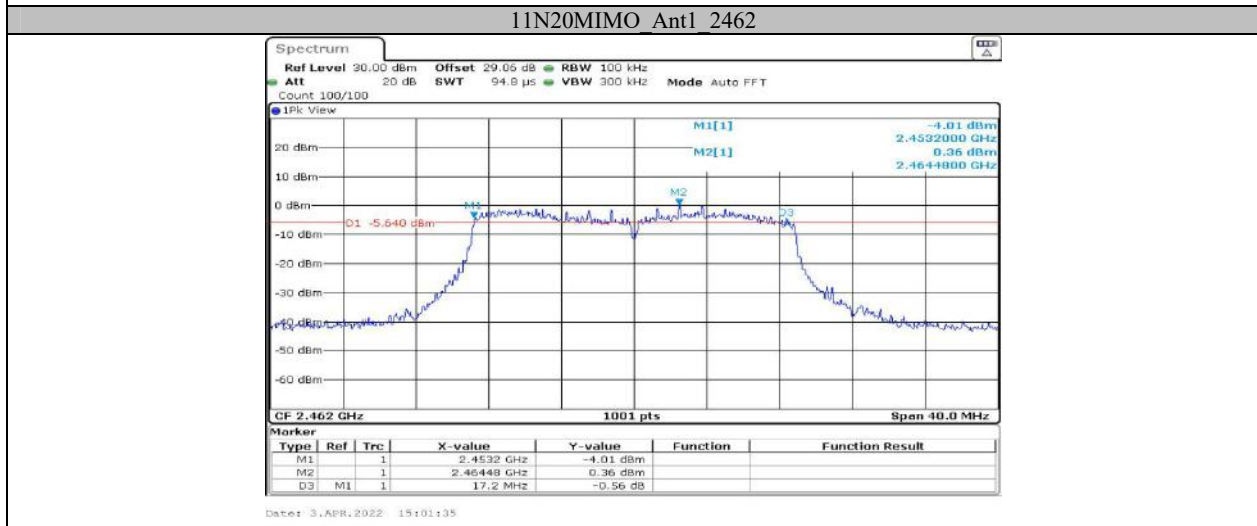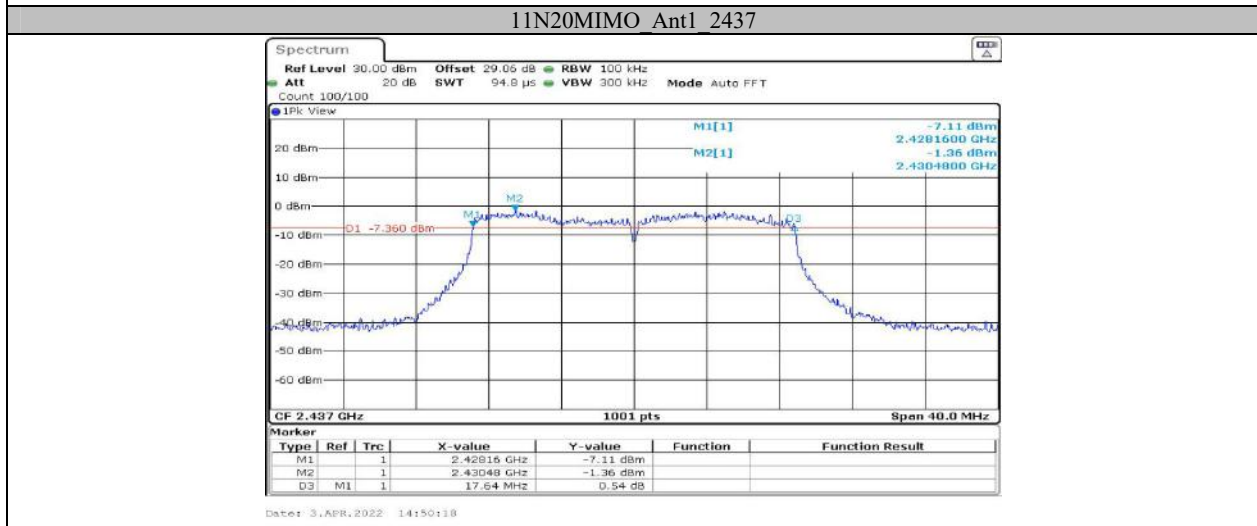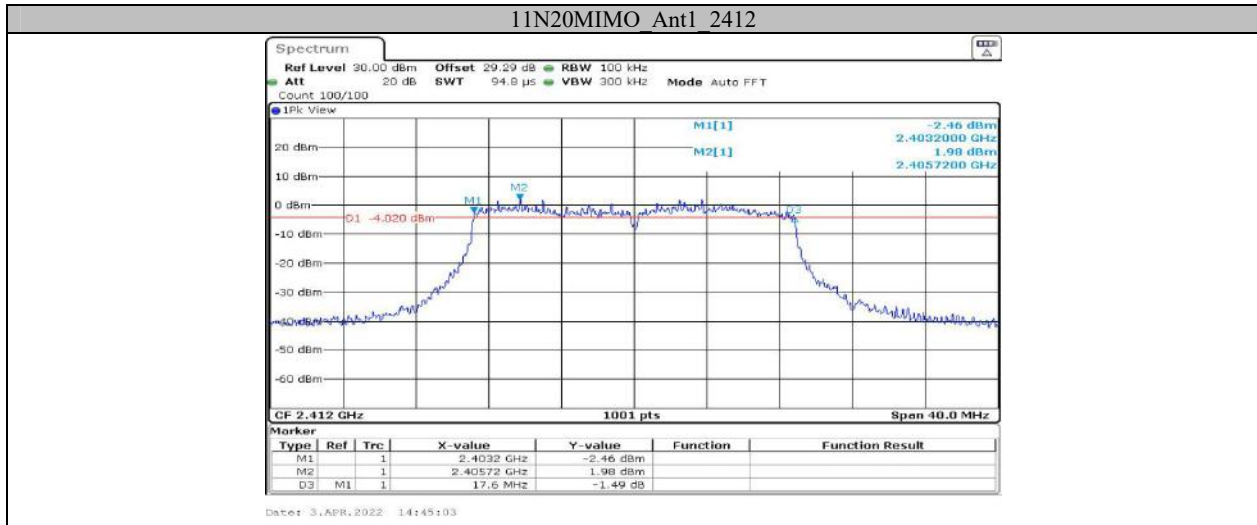

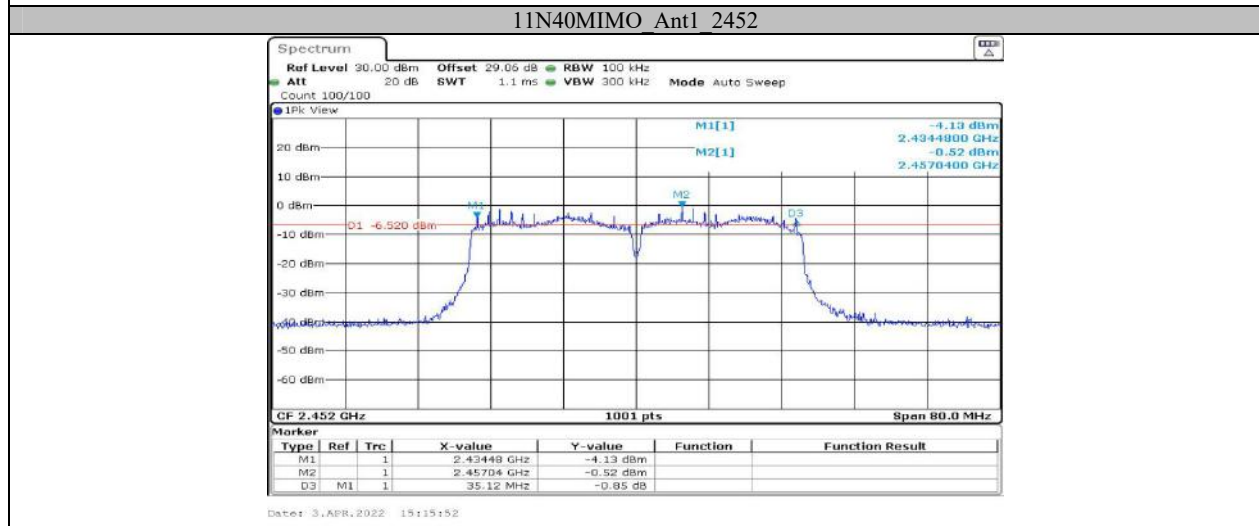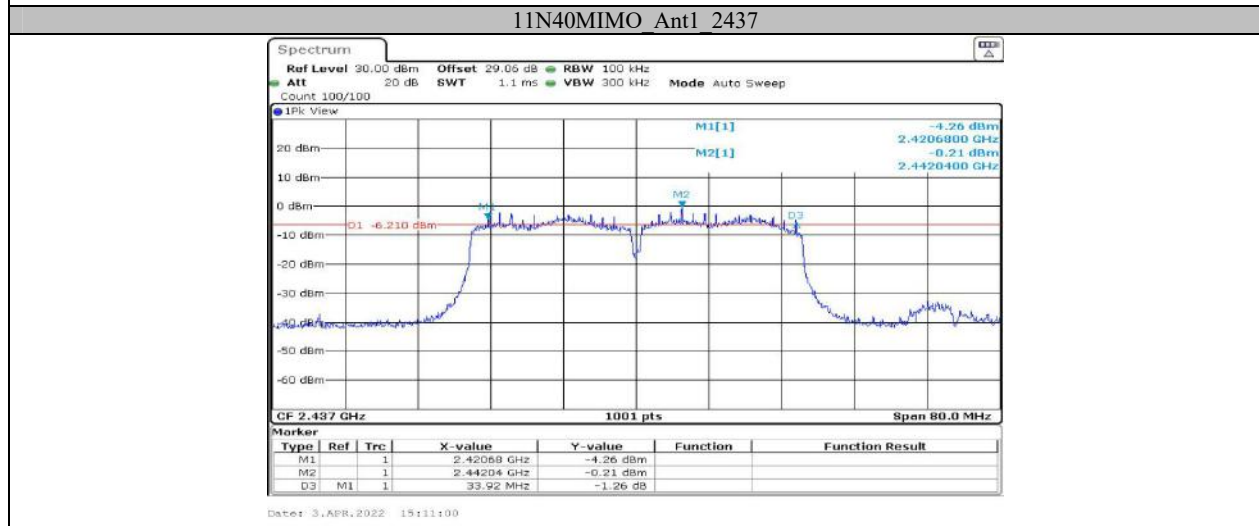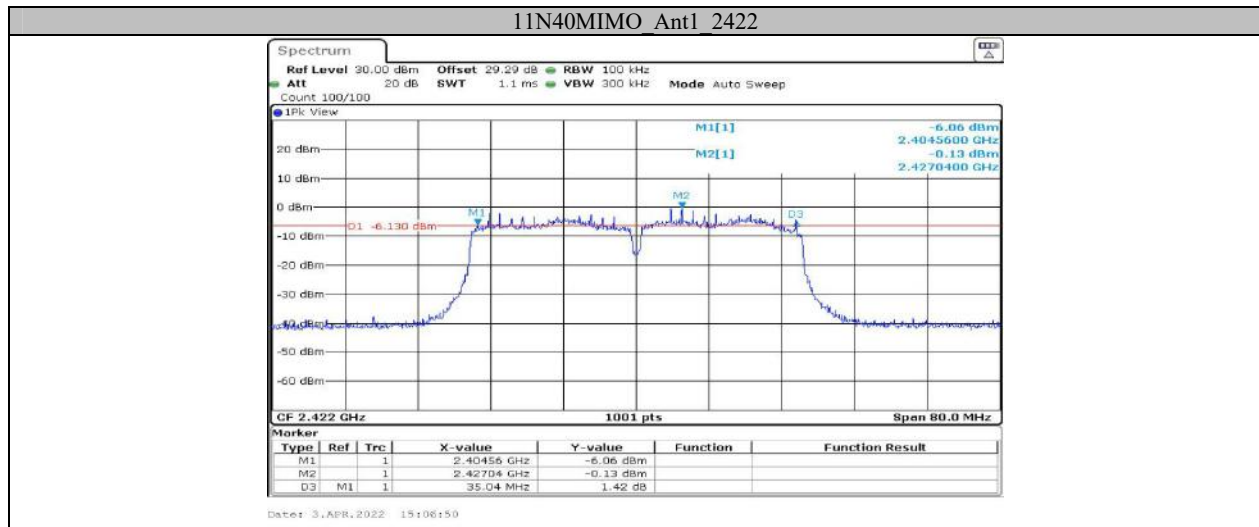

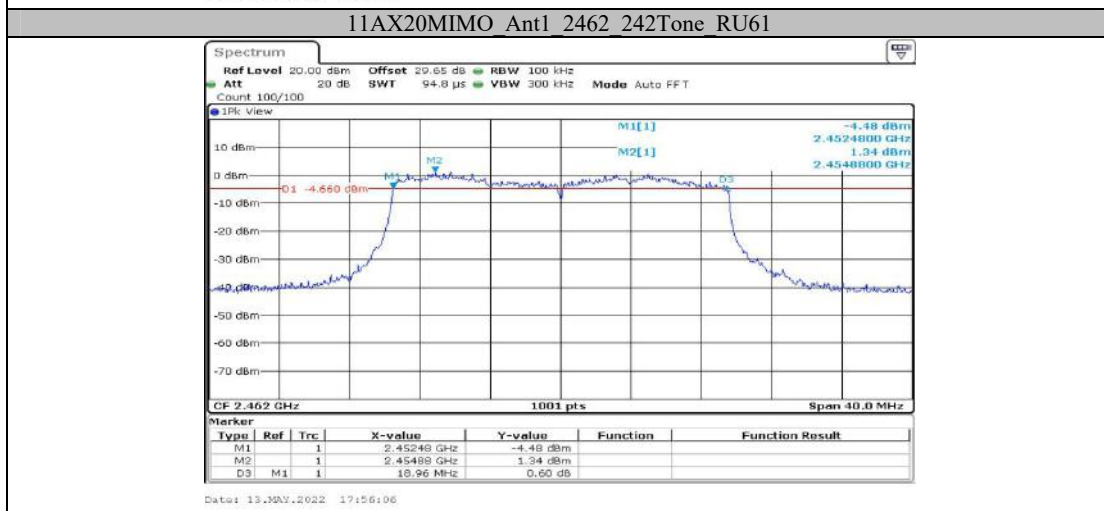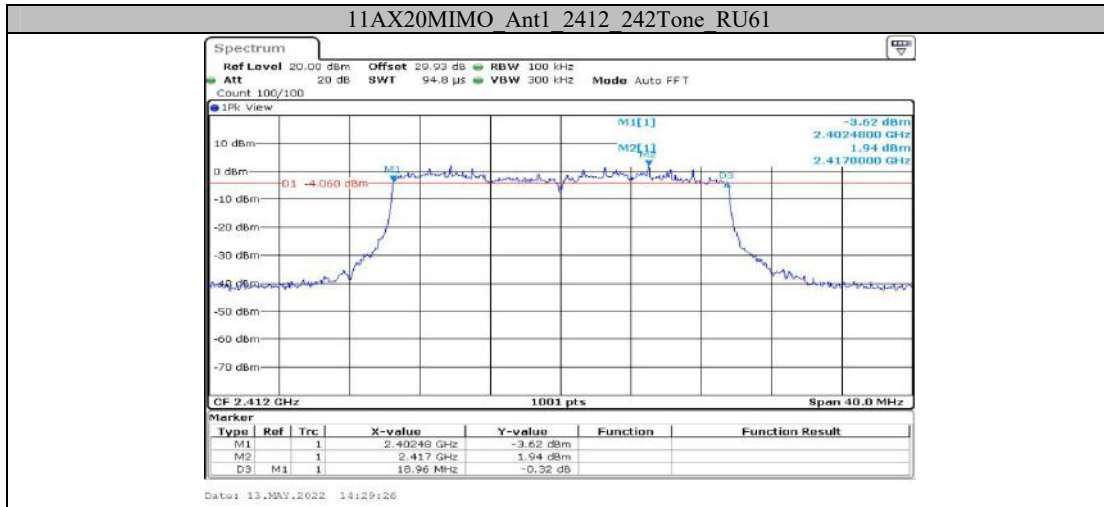

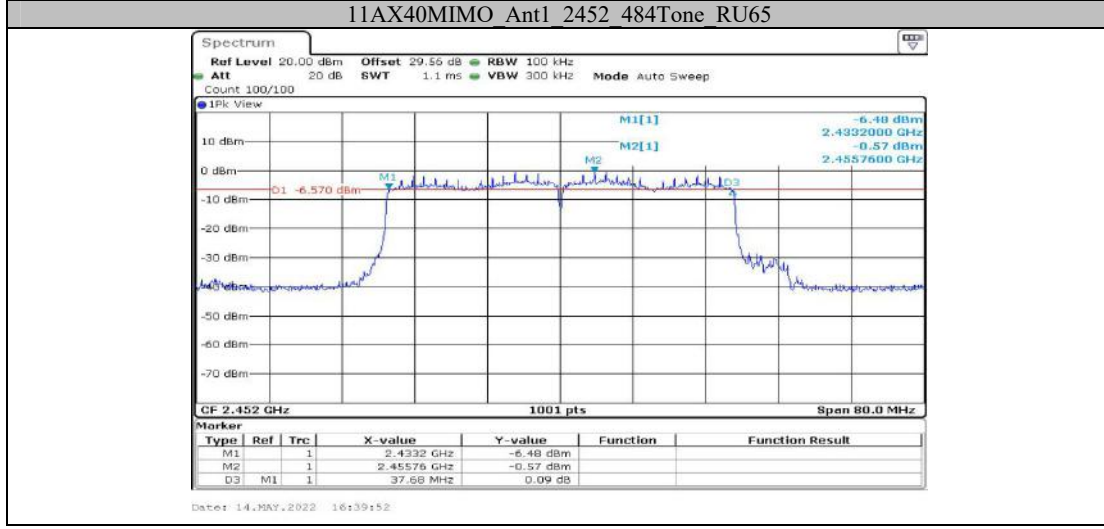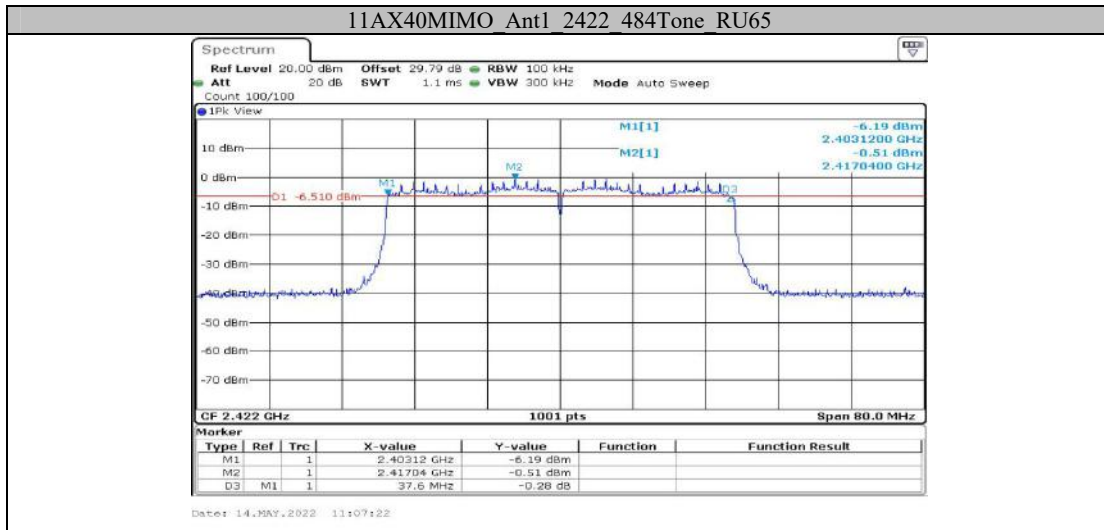





Appendix B: Occupied Channel Bandwidth Test Result


Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	13.147	---	---
	Ant1	2437	13.187	---	---
	Ant1	2462	13.227	---	---
11G-CDD	Ant1	2412	16.743	---	---
	Ant1	2437	16.703	---	---
	Ant1	2462	16.783	---	---
11N20MIMO	Ant1	2412	17.902	---	---
	Ant1	2437	17.902	---	---
	Ant1	2462	17.902	---	---
11N40MIMO	Ant1	2422	36.124	---	---
	Ant1	2437	36.124	---	---
	Ant1	2452	36.044	---	---

Test Mode	Antenna	Freq(MHz)	RuSize	RuIndex	OCB [MHz]	Limit[MHz]	Verdict
11AX20MIMO	Ant1	2412	242Tone	RU61	18.901	---	---
	Ant1	2437	242Tone	RU61	18.901	---	---
	Ant1	2462	242Tone	RU61	18.821	---	---
11AX40MIMO	Ant1	2422	484Tone	RU65	37.802	---	---
	Ant1	2437	484Tone	RU65	37.882	---	---
	Ant1	2452	484Tone	RU65	37.802	---	---



Test Graphs



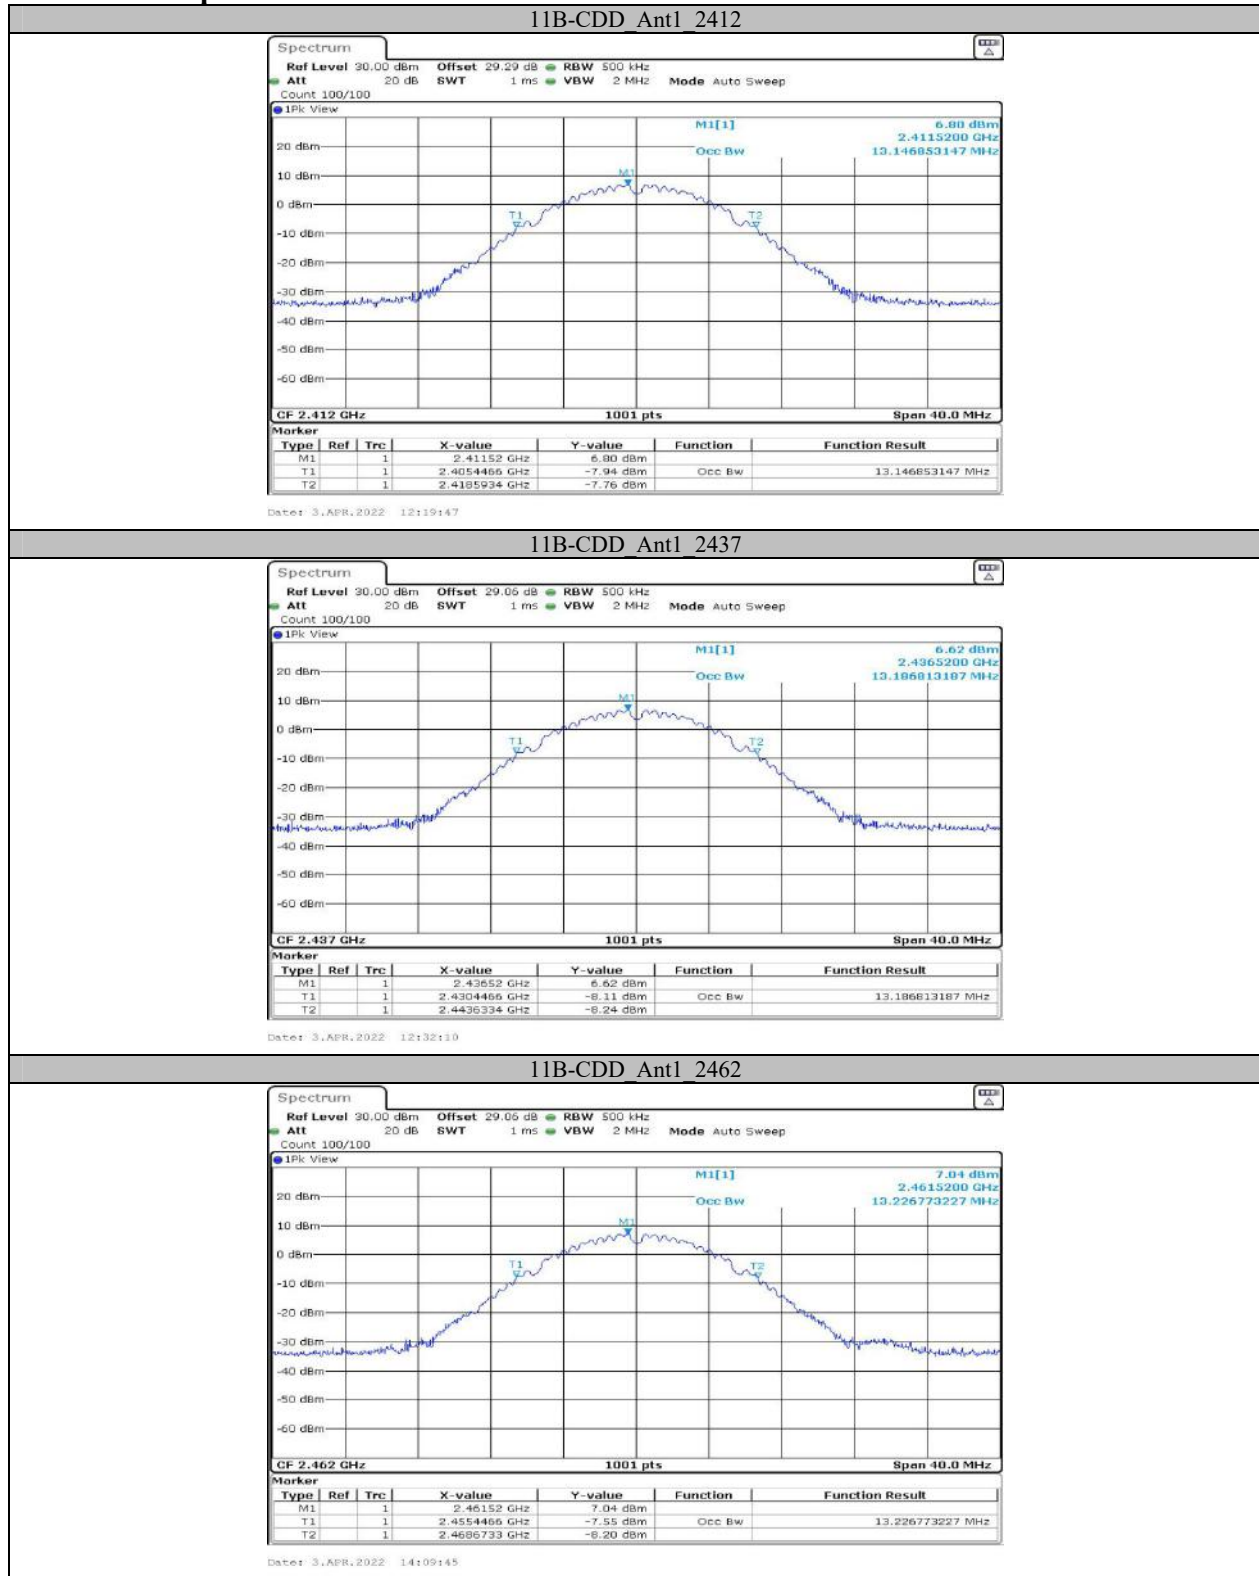


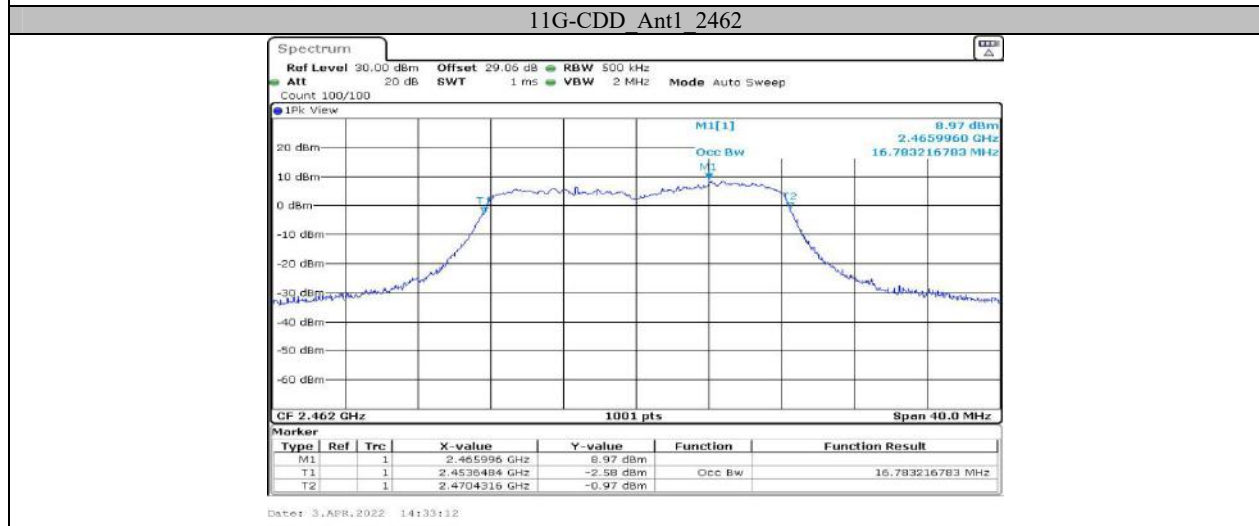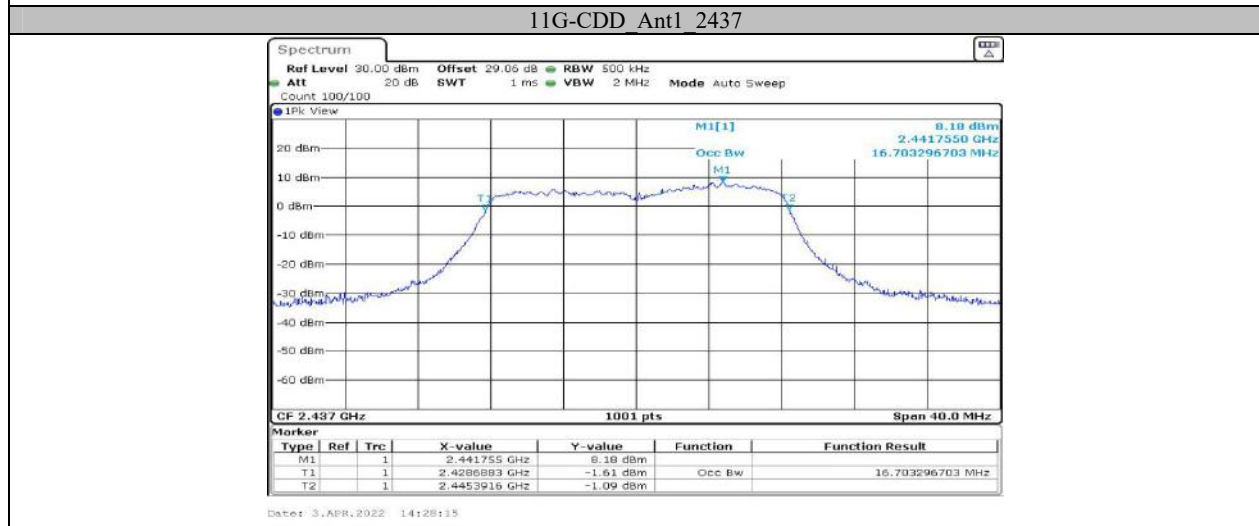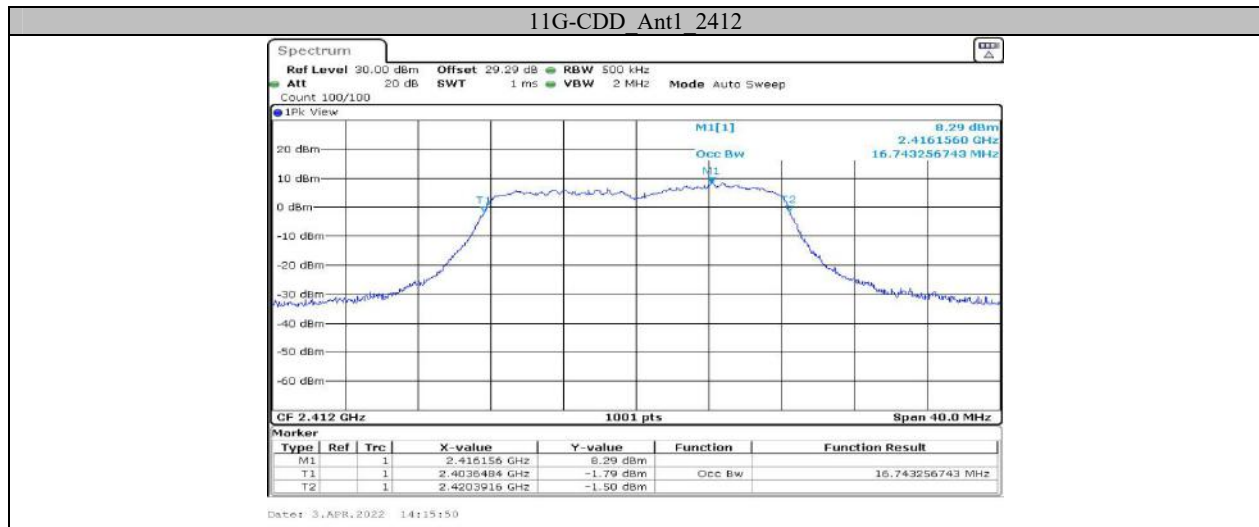

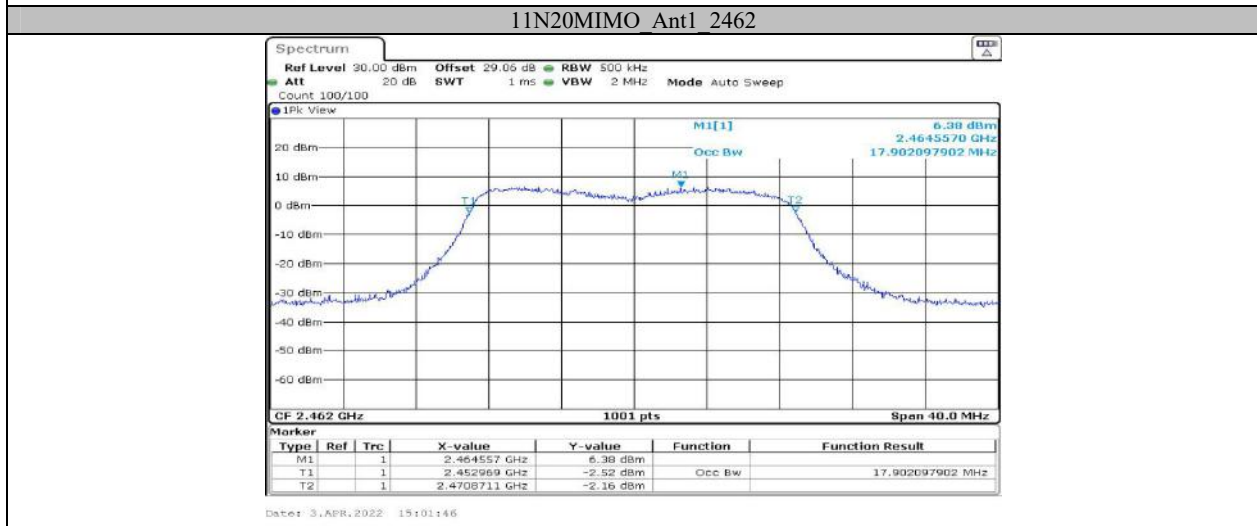



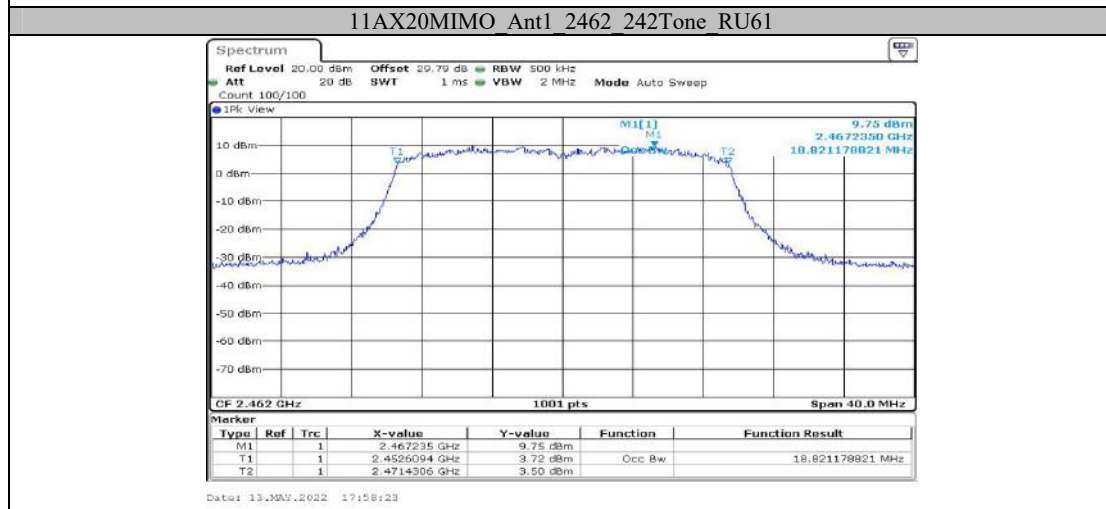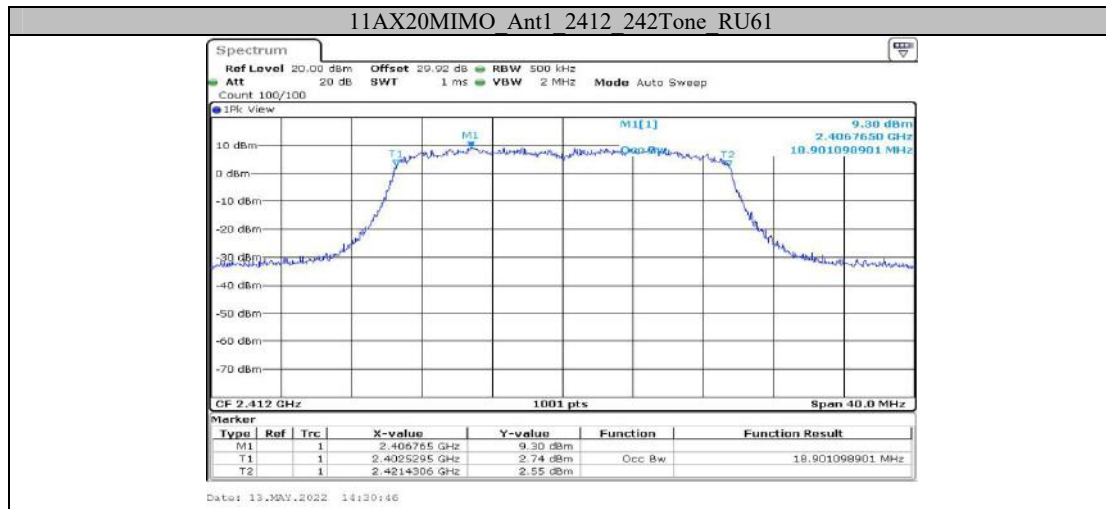

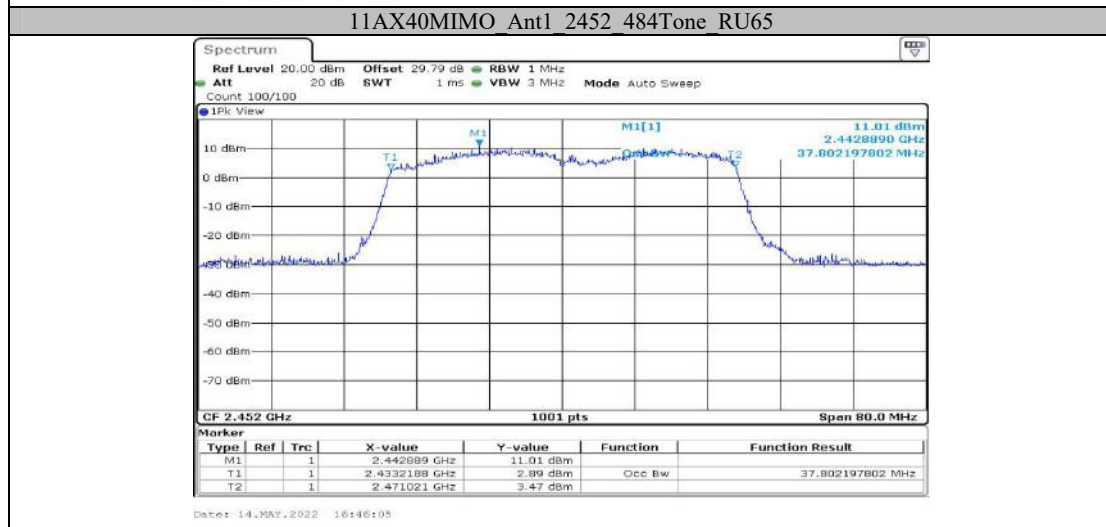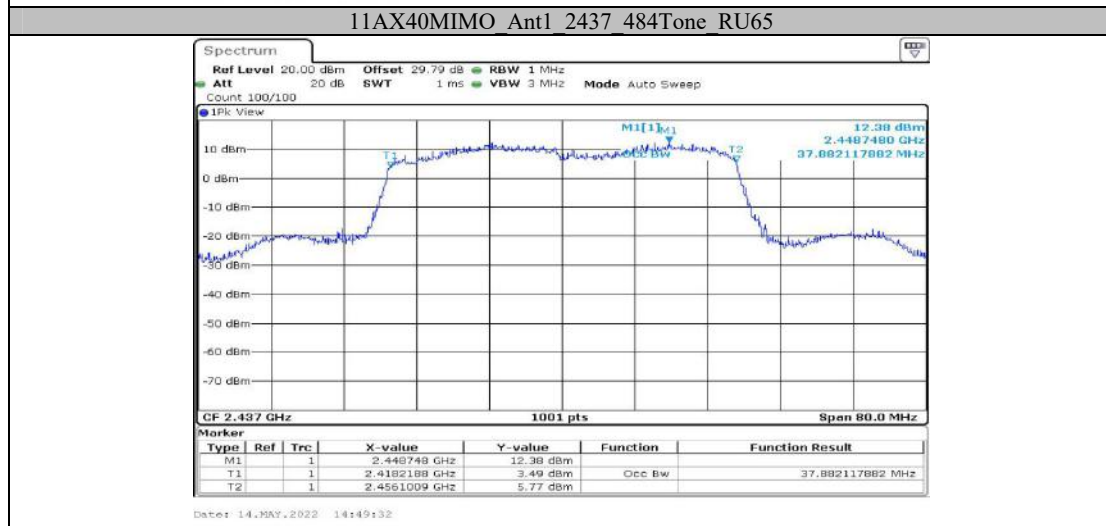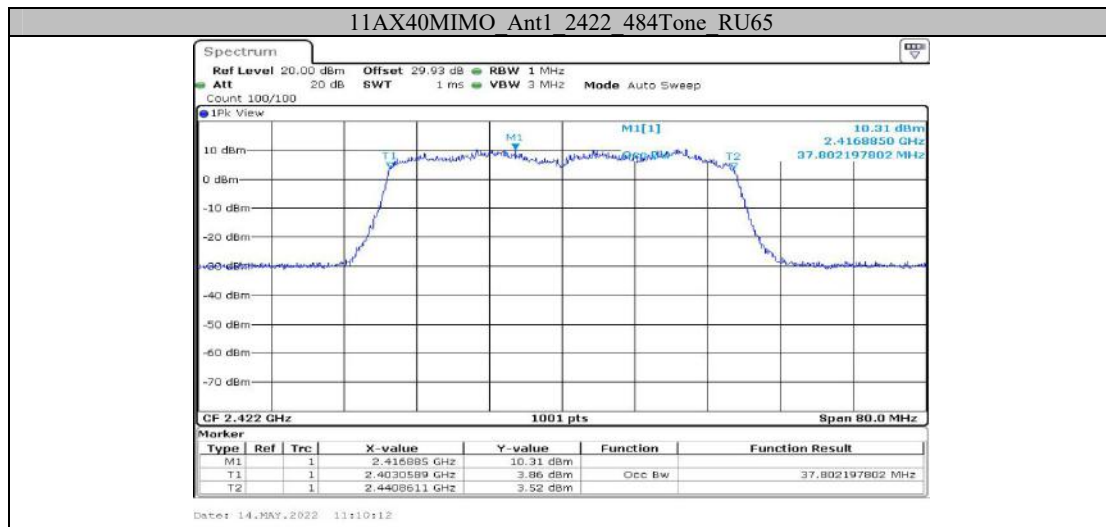

Appendix C: Maximum conducted average output power Test Result

Test Mode	Antenna	Channel	Result[dBm]	FCC Limit[dBm]	ISED Limit[dBm]	Verdict
11B-CDD	Ant1	2412	19.76	≤30.00	≤30.00	PASS
	Ant2	2412	20.15	≤30.00	≤30.00	PASS
	Ant3	2412	20.64	≤30.00	≤30.00	PASS
	Ant4	2412	19.74	≤30.00	≤30.00	PASS
	total	2412	26.11	≤30.00	≤30.00	PASS
	Ant1	2437	19.39	≤30.00	≤30.00	PASS
	Ant2	2437	20.57	≤30.00	≤30.00	PASS
	Ant3	2437	20.38	≤30.00	≤30.00	PASS
	Ant4	2437	20.30	≤30.00	≤30.00	PASS
	total	2437	26.20	≤30.00	≤30.00	PASS
	Ant1	2462	20.05	≤30.00	≤30.00	PASS
	Ant2	2462	20.21	≤30.00	≤30.00	PASS
	Ant3	2462	20.46	≤30.00	≤30.00	PASS
	Ant4	2462	19.63	≤30.00	≤30.00	PASS
total	2462	26.12	≤30.00	≤30.00	PASS	
11G-CDD	Ant1	2412	13.25	≤30.00	≤30.00	PASS
	Ant2	2412	14.39	≤30.00	≤30.00	PASS
	Ant3	2412	13.94	≤30.00	≤30.00	PASS
	Ant4	2412	14.73	≤30.00	≤30.00	PASS
	total	2412	20.13	≤30.00	≤30.00	PASS
	Ant1	2437	17.89	≤30.00	≤30.00	PASS
	Ant2	2437	16.55	≤30.00	≤30.00	PASS
	Ant3	2437	16.81	≤30.00	≤30.00	PASS
	Ant4	2437	17.02	≤30.00	≤30.00	PASS
	total	2437	23.12	≤30.00	≤30.00	PASS
	Ant1	2462	13.89	≤30.00	≤30.00	PASS
	Ant2	2462	14.77	≤30.00	≤30.00	PASS
	Ant3	2462	14.32	≤30.00	≤30.00	PASS
	Ant4	2462	14.94	≤30.00	≤30.00	PASS
total	2462	20.52	≤30.00	≤30.00	PASS	
11N20MIMO	Ant1	2412	14.18	≤26.50	≤30.00	PASS
	Ant2	2412	15.14	≤26.50	≤30.00	PASS
	Ant3	2412	15.16	≤26.50	≤30.00	PASS
	Ant4	2412	15.43	≤26.50	≤30.00	PASS
	total	2412	21.02	≤26.50	≤30.00	PASS
	Ant1	2437	17.80	≤26.50	≤30.00	PASS
	Ant2	2437	18.28	≤26.50	≤30.00	PASS
	Ant3	2437	18.22	≤26.50	≤30.00	PASS
	Ant4	2437	18.15	≤26.50	≤30.00	PASS
	total	2437	24.14	≤26.50	≤30.00	PASS
	Ant1	2462	14.79	≤26.50	≤30.00	PASS
	Ant2	2462	15.46	≤26.50	≤30.00	PASS
	Ant3	2462	15.47	≤26.50	≤30.00	PASS
	Ant4	2462	15.67	≤26.50	≤30.00	PASS
total	2462	21.38	≤26.50	≤30.00	PASS	
11N40MIMO	Ant1	2422	13.75	≤26.50	≤30.00	PASS
	Ant2	2422	14.64	≤26.50	≤30.00	PASS
	Ant3	2422	14.85	≤26.50	≤30.00	PASS
	Ant4	2422	14.85	≤26.50	≤30.00	PASS
	total	2422	20.57	≤26.50	≤30.00	PASS
	Ant1	2437	17.24	≤26.50	≤30.00	PASS
	Ant2	2437	17.88	≤26.50	≤30.00	PASS
	Ant3	2437	17.51	≤26.50	≤30.00	PASS
	Ant4	2437	17.43	≤26.50	≤30.00	PASS
total	2437	23.54	≤26.50	≤30.00	PASS	

	Ant1	2452	14.21	≤26.50	≤30.00	PASS
	Ant2	2452	15.10	≤26.50	≤30.00	PASS
	Ant3	2452	14.61	≤26.50	≤30.00	PASS
	Ant4	2452	14.95	≤26.50	≤30.00	PASS
	total	2452	20.75	≤26.50	≤30.00	PASS

Test Mode	Antenna	Freq(MHz)	RuSize	RuIndex	Result [dBm]	Limit[dBm]	Verdict
11AX20M IMO	Ant1	2412	26Tone	RU0	14.38	≤26.50	PASS
			52Tone	RU37	14.19	≤26.50	PASS
			106Tone	RU53	14.47	≤26.50	PASS
			242Tone	RU61	14.52	≤26.50	PASS
	Ant2	2412	26Tone	RU0	14.17	≤26.50	PASS
			52Tone	RU37	13.65	≤26.50	PASS
			106Tone	RU53	14.87	≤26.50	PASS
			242Tone	RU61	14.48	≤26.50	PASS
	Ant3	2412	26Tone	RU0	14.51	≤26.50	PASS
			52Tone	RU37	13.88	≤26.50	PASS
			106Tone	RU53	14.18	≤26.50	PASS
			242Tone	RU61	14.17	≤26.50	PASS
	Ant4	2412	26Tone	RU0	14.43	≤26.50	PASS
			52Tone	RU37	15.45	≤26.50	PASS
			106Tone	RU53	14.37	≤26.50	PASS
			242Tone	RU61	14.21	≤26.50	PASS
	total	2412	26Tone	RU0	20.39	≤26.50	PASS
			52Tone	RU37	20.37	≤26.50	PASS
			106Tone	RU53	20.50	≤26.50	PASS
			242Tone	RU61	20.37	≤26.50	PASS
	Ant1	2437	26Tone	RU0	16.47	≤26.50	PASS
			52Tone	RU37	16.59	≤26.50	PASS
			106Tone	RU53	16.68	≤26.50	PASS
			242Tone	RU61	16.21	≤26.50	PASS
	Ant2	2437	26Tone	RU0	16.79	≤26.50	PASS
			52Tone	RU37	16.86	≤26.50	PASS
			106Tone	RU53	16.84	≤26.50	PASS
			242Tone	RU61	16.64	≤26.50	PASS
	Ant3	2437	26Tone	RU0	16.49	≤26.50	PASS
			52Tone	RU37	16.67	≤26.50	PASS
			106Tone	RU53	17.91	≤26.50	PASS
			242Tone	RU61	16.63	≤26.50	PASS
	Ant4	2437	26Tone	RU0	16.55	≤26.50	PASS
			52Tone	RU37	16.40	≤26.50	PASS
			106Tone	RU53	16.65	≤26.50	PASS
			242Tone	RU61	16.69	≤26.50	PASS
	total	2437	26Tone	RU0	22.60	≤26.50	PASS
			52Tone	RU37	22.65	≤26.50	PASS
			106Tone	RU53	23.07	≤26.50	PASS
			242Tone	RU61	22.57	≤26.50	PASS
	Ant1	2462	26Tone	RU0	14.12	≤26.50	PASS
			52Tone	RU37	15.19	≤26.50	PASS
			106Tone	RU53	14.03	≤26.50	PASS
			242Tone	RU61	14.73	≤26.50	PASS
	Ant2	2462	26Tone	RU0	13.93	≤26.50	PASS
			52Tone	RU37	14.43	≤26.50	PASS
			106Tone	RU53	14.24	≤26.50	PASS
			242Tone	RU61	14.03	≤26.50	PASS
Ant3	2462	26Tone	RU0	14.03	≤26.50	PASS	
		52Tone	RU37	14.77	≤26.50	PASS	
		106Tone	RU53	14.36	≤26.50	PASS	
		242Tone	RU61	14.79	≤26.50	PASS	

11AX40M IMO	Ant4	2462	26Tone	RU0	13.88	≤26.50	PASS
			52Tone	RU37	14.53	≤26.50	PASS
			106Tone	RU53	14.59	≤26.50	PASS
			242Tone	RU61	14.65	≤26.50	PASS
	total	2462	26Tone	RU0	20.01	≤26.50	PASS
			52Tone	RU37	20.76	≤26.50	PASS
			106Tone	RU53	20.33	≤26.50	PASS
			242Tone	RU61	20.58	≤26.50	PASS
	Ant1	2422	26Tone	RU0	13.58	≤26.50	PASS
			52Tone	RU37	14.53	≤26.50	PASS
			106Tone	RU53	14.48	≤26.50	PASS
			242Tone	RU61	13.63	≤26.50	PASS
	Ant2	2422	484Tone	RU65	13.88	≤26.50	PASS
			26Tone	RU0	13.35	≤26.50	PASS
			52Tone	RU37	14.51	≤26.50	PASS
			106Tone	RU53	13.83	≤26.50	PASS
	Ant3	2422	242Tone	RU61	13.77	≤26.50	PASS
			484Tone	RU65	14.86	≤26.50	PASS
			26Tone	RU0	13.61	≤26.50	PASS
			52Tone	RU37	14.08	≤26.50	PASS
	Ant4	2422	106Tone	RU53	14.08	≤26.50	PASS
			242Tone	RU61	13.61	≤26.50	PASS
			484Tone	RU65	13.09	≤26.50	PASS
			26Tone	RU0	13.05	≤26.50	PASS
	total	2422	52Tone	RU37	13.12	≤26.50	PASS
			106Tone	RU53	14.70	≤26.50	PASS
			242Tone	RU61	13.78	≤26.50	PASS
			484Tone	RU65	14.09	≤26.50	PASS
Ant1	2437	26Tone	RU0	19.42	≤26.50	PASS	
		52Tone	RU37	20.12	≤26.50	PASS	
		106Tone	RU53	20.31	≤26.50	PASS	
		242Tone	RU61	19.72	≤26.50	PASS	
Ant2	2437	484Tone	RU65	20.05	≤26.50	PASS	
		26Tone	RU0	15.18	≤26.50	PASS	
		52Tone	RU37	15.85	≤26.50	PASS	
		106Tone	RU53	16.59	≤26.50	PASS	
Ant3	2437	242Tone	RU61	16.97	≤26.50	PASS	
		484Tone	RU65	16.23	≤26.50	PASS	
		26Tone	RU0	15.77	≤26.50	PASS	
		52Tone	RU37	15.57	≤26.50	PASS	
Ant4	2437	106Tone	RU53	16.36	≤26.50	PASS	
		242Tone	RU61	16.31	≤26.50	PASS	
		484Tone	RU65	16.72	≤26.50	PASS	
		26Tone	RU0	15.88	≤26.50	PASS	
total	2437	52Tone	RU37	15.92	≤26.50	PASS	
		106Tone	RU53	16.20	≤26.50	PASS	
		242Tone	RU61	16.31	≤26.50	PASS	
		484Tone	RU65	16.25	≤26.50	PASS	
Ant1	2452	26Tone	RU0	14.84	≤26.50	PASS	
		52Tone	RU37	16.08	≤26.50	PASS	
		106Tone	RU53	15.98	≤26.50	PASS	
		242Tone	RU61	16.44	≤26.50	PASS	
total	2437	484Tone	RU65	16.92	≤26.50	PASS	
		26Tone	RU0	21.46	≤26.50	PASS	
		52Tone	RU37	21.88	≤26.50	PASS	
		106Tone	RU53	22.31	≤26.50	PASS	
Ant1	2452	242Tone	RU61	22.54	≤26.50	PASS	
		484Tone	RU65	22.56	≤26.50	PASS	
		26Tone	RU0	13.02	≤26.50	PASS	
			52Tone	RU37	15.25	≤26.50	PASS
			106Tone	RU53	14.42	≤26.50	PASS

	Ant2	2452	242Tone	RU61	14.39	≤ 26.50	PASS
			484Tone	RU65	14.11	≤ 26.50	PASS
			26Tone	RU0	13.06	≤ 26.50	PASS
			52Tone	RU37	14.88	≤ 26.50	PASS
			106Tone	RU53	14.07	≤ 26.50	PASS
			242Tone	RU61	15.46	≤ 26.50	PASS
	Ant3	2452	484Tone	RU65	14.58	≤ 26.50	PASS
			26Tone	RU0	13.67	≤ 26.50	PASS
			52Tone	RU37	14.73	≤ 26.50	PASS
			106Tone	RU53	14.45	≤ 26.50	PASS
			242Tone	RU61	15.02	≤ 26.50	PASS
			484Tone	RU65	14.97	≤ 26.50	PASS
	Ant4	2452	26Tone	RU0	13.28	≤ 26.50	PASS
			52Tone	RU37	14.26	≤ 26.50	PASS
			106Tone	RU53	14.41	≤ 26.50	PASS
			242Tone	RU61	14.52	≤ 26.50	PASS
			484Tone	RU65	14.56	≤ 26.50	PASS
	total	2452	26Tone	RU0	19.29	≤ 26.50	PASS
			52Tone	RU37	20.82	≤ 26.50	PASS
			106Tone	RU53	20.36	≤ 26.50	PASS
242Tone			RU61	20.89	≤ 26.50	PASS	
484Tone			RU65	20.59	≤ 26.50	PASS	

Note:

The duty cycle factor has added into result.

The maximum antenna gain is 3.5dBi.

For 802.11b/g mode, the device employed cyclic delay diversity (CDD).

According to KDB 662911 D01 v02r01, for power measurement on IEEE 802.11 devices:

Array Gain =0 dB (i.e., no array gain) for $N_{ant} \leq 4$; So Directional gain = $G_{ANT} + \text{Array Gain} = 3.5\text{dBi} < 6\text{dBi}$

The maximum EIRP is $26.2\text{dBm} + 3.5\text{dBi} = 29.7\text{dBm} < 36\text{dBm}$, so it can meets the EIRP limit of ISSED.

For 802.11n/ax mode, the device support beam-forming function.

*The directional gain = $G_{ANT} + 10 * \log(4/1) = 9.5\text{dBi} > 6\text{dBi}$;*

So for FCC, the limit should be reduce $(9.5-6)\text{dB} = 3.5\text{dB}$

The maximum EIRP is $24.14\text{dBm} + 9.5\text{dBi} = 33.64\text{dBm} < 36\text{dBm}$, so it can meets the EIRP limit of ISSED.

Appendix D: Maximum power spectral density Test Result

Test Mode	Antenna	Channel	Result[dBm/3kHz]	FCC Limit [dBm/3kHz]	ISED Limit [dBm/3kHz]	Verdict
11B-CDD	Ant1	2412	-3.68	≤4.50	≤8.0	PASS
	Ant2	2412	-2.73	≤4.50	≤8.0	PASS
	Ant3	2412	-3.94	≤4.50	≤8.0	PASS
	Ant4	2412	-2.71	≤4.50	≤8.0	PASS
	total	2412	2.79	≤4.50	≤8.0	PASS
	Ant1	2437	-3.25	≤4.50	≤8.0	PASS
	Ant2	2437	-3.33	≤4.50	≤8.0	PASS
	Ant3	2437	-3.67	≤4.50	≤8.0	PASS
	Ant4	2437	-2.80	≤4.50	≤8.0	PASS
	total	2437	2.77	≤4.50	≤8.0	PASS
	Ant1	2462	-3.63	≤4.50	≤8.0	PASS
	Ant2	2462	-3.88	≤4.50	≤8.0	PASS
	Ant3	2462	-3.43	≤4.50	≤8.0	PASS
	Ant4	2462	-3.72	≤4.50	≤8.0	PASS
total	2462	2.36	≤4.50	≤8.0	PASS	
11G-CDD	Ant1	2412	-12.98	≤4.50	≤8.0	PASS
	Ant2	2412	-13.40	≤4.50	≤8.0	PASS
	Ant3	2412	-13.43	≤4.50	≤8.0	PASS
	Ant4	2412	-12.17	≤4.50	≤8.0	PASS
	total	2412	-6.94	≤4.50	≤8.0	PASS
	Ant1	2437	-9.96	≤4.50	≤8.0	PASS
	Ant2	2437	-10.99	≤4.50	≤8.0	PASS
	Ant3	2437	-10.88	≤4.50	≤8.0	PASS
	Ant4	2437	-10.03	≤4.50	≤8.0	PASS
	total	2437	-4.42	≤4.50	≤8.0	PASS
	Ant1	2462	-12.2	≤4.50	≤8.0	PASS
	Ant2	2462	-12.14	≤4.50	≤8.0	PASS
	Ant3	2462	-11.13	≤4.50	≤8.0	PASS
	Ant4	2462	-12.82	≤4.50	≤8.0	PASS
total	2462	-6.01	≤4.50	≤8.0	PASS	
11N20MIMO	Ant1	2412	-11.01	≤4.50	≤8.0	PASS
	Ant2	2412	-11.05	≤4.50	≤8.0	PASS
	Ant3	2412	-11.05	≤4.50	≤8.0	PASS
	Ant4	2412	-10.79	≤4.50	≤8.0	PASS
	total	2412	-4.95	≤4.50	≤8.0	PASS
	Ant1	2437	-8.79	≤4.50	≤8.0	PASS
	Ant2	2437	-8.51	≤4.50	≤8.0	PASS
	Ant3	2437	-8.6	≤4.50	≤8.0	PASS
	Ant4	2437	-7.75	≤4.50	≤8.0	PASS
	total	2437	-2.37	≤4.50	≤8.0	PASS
	Ant1	2462	-10.49	≤4.50	≤8.0	PASS
	Ant2	2462	-10.31	≤4.50	≤8.0	PASS
	Ant3	2462	-10.55	≤4.50	≤8.0	PASS
	Ant4	2462	-9.75	≤4.50	≤8.0	PASS
total	2462	-4.24	≤4.50	≤8.0	PASS	
11N40MIMO	Ant1	2422	-14.02	≤4.50	≤8.0	PASS
	Ant2	2422	-13.11	≤4.50	≤8.0	PASS
	Ant3	2422	-13.12	≤4.50	≤8.0	PASS
	Ant4	2422	-13.82	≤4.50	≤8.0	PASS
	total	2422	-7.48	≤4.50	≤8.0	PASS
	Ant1	2437	-10.53	≤4.50	≤8.0	PASS
	Ant2	2437	-11.12	≤4.50	≤8.0	PASS
	Ant3	2437	-10.94	≤4.50	≤8.0	PASS
	Ant4	2437	-11.15	≤4.50	≤8.0	PASS
total	2437	-4.91	≤4.50	≤8.0	PASS	

	Ant1	2452	-13.57	≤4.50	≤8.0	PASS
	Ant2	2452	-13.62	≤4.50	≤8.0	PASS
	Ant3	2452	-14.10	≤4.50	≤8.0	PASS
	Ant4	2452	-14.05	≤4.50	≤8.0	PASS
	total	2452	-7.81	≤4.50	≤8.0	PASS

Test Mode	Antenna	Freq(MHz)	RuSize	RuIndex	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11AX20MI MO	Ant1	2412	26Tone	RU0	-5.30	≤4.50	PASS
			52Tone	RU37	-8.37	≤4.50	PASS
			106Tone	RU53	-8.67	≤4.50	PASS
			242Tone	RU61	-11.30	≤4.50	PASS
	Ant2	2412	26Tone	RU0	-5.25	≤4.50	PASS
			52Tone	RU37	-9.13	≤4.50	PASS
			106Tone	RU53	-8.49	≤4.50	PASS
			242Tone	RU61	-11.34	≤4.50	PASS
	Ant3	2412	26Tone	RU0	-5.42	≤4.50	PASS
			52Tone	RU37	-9.07	≤4.50	PASS
			106Tone	RU53	-9.84	≤4.50	PASS
			242Tone	RU61	-12.66	≤4.50	PASS
	Ant4	2412	26Tone	RU0	-6.26	≤4.50	PASS
			52Tone	RU37	-7.22	≤4.50	PASS
			106Tone	RU53	-9.34	≤4.50	PASS
			242Tone	RU61	-12.73	≤4.50	PASS
	total	2412	26Tone	RU0	0.48	≤4.50	PASS
			52Tone	RU37	-2.36	≤4.50	PASS
			106Tone	RU53	-3.03	≤4.50	PASS
			242Tone	RU61	-5.93	≤4.50	PASS
	Ant1	2437	26Tone	RU0	-4.86	≤4.50	PASS
			52Tone	RU37	-5.80	≤4.50	PASS
			106Tone	RU53	-7.29	≤4.50	PASS
			242Tone	RU61	-8.56	≤4.50	PASS
	Ant2	2437	26Tone	RU0	-4.56	≤4.50	PASS
			52Tone	RU37	-4.69	≤4.50	PASS
			106Tone	RU53	-7.83	≤4.50	PASS
			242Tone	RU61	-9.64	≤4.50	PASS
	Ant3	2437	26Tone	RU0	-4.19	≤4.50	PASS
			52Tone	RU37	-6.15	≤4.50	PASS
			106Tone	RU53	-7.66	≤4.50	PASS
			242Tone	RU61	-9.26	≤4.50	PASS
	Ant4	2437	26Tone	RU0	-4.63	≤4.50	PASS
			52Tone	RU37	-4.81	≤4.50	PASS
			106Tone	RU53	-8.59	≤4.50	PASS
			242Tone	RU61	-8.47	≤4.50	PASS
	total	2437	26Tone	RU0	1.47	≤4.50	PASS
			52Tone	RU37	0.70	≤4.50	PASS
			106Tone	RU53	-1.80	≤4.50	PASS
			242Tone	RU61	-2.93	≤4.50	PASS
	Ant1	2462	26Tone	RU0	-6.08	≤4.50	PASS
			52Tone	RU37	-7.03	≤4.50	PASS
			106Tone	RU53	-9.45	≤4.50	PASS
			242Tone	RU61	-11.30	≤4.50	PASS
	Ant2	2462	26Tone	RU0	-6.55	≤4.50	PASS
			52Tone	RU37	-6.84	≤4.50	PASS
			106Tone	RU53	-9.94	≤4.50	PASS
			242Tone	RU61	-11.19	≤4.50	PASS
Ant3	2462	26Tone	RU0	-6.41	≤4.50	PASS	
		52Tone	RU37	-7.85	≤4.50	PASS	
		106Tone	RU53	-9.87	≤4.50	PASS	
		242Tone	RU61	-11.58	≤4.50	PASS	
Ant4	2462	26Tone	RU0	-6.23	≤4.50	PASS	

11AX40MI MO	total	2462	52Tone	RU37	-8.27	≤4.50	PASS
			106Tone	RU53	-9.15	≤4.50	PASS
			242Tone	RU61	-10.86	≤4.50	PASS
			26Tone	RU0	-0.29	≤4.50	PASS
	Ant1	2422	52Tone	RU37	-1.44	≤4.50	PASS
			106Tone	RU53	-3.57	≤4.50	PASS
			242Tone	RU61	-5.20	≤4.50	PASS
			26Tone	RU0	-6.11	≤4.50	PASS
	Ant2	2422	52Tone	RU37	-9.14	≤4.50	PASS
			106Tone	RU53	-10.68	≤4.50	PASS
			242Tone	RU61	-15.98	≤4.50	PASS
			484Tone	RU65	-14.83	≤4.50	PASS
	Ant3	2422	26Tone	RU0	-6.06	≤4.50	PASS
			52Tone	RU37	-9.18	≤4.50	PASS
			106Tone	RU53	-10.41	≤4.50	PASS
			242Tone	RU61	-15.51	≤4.50	PASS
Ant4	2422	484Tone	RU65	-13.81	≤4.50	PASS	
		26Tone	RU0	-6.11	≤4.50	PASS	
		52Tone	RU37	-9.41	≤4.50	PASS	
		106Tone	RU53	-10.46	≤4.50	PASS	
total	2422	242Tone	RU61	-15.07	≤4.50	PASS	
		484Tone	RU65	-15.47	≤4.50	PASS	
		26Tone	RU0	-6.18	≤4.50	PASS	
		52Tone	RU37	-8.31	≤4.50	PASS	
Ant1	2437	106Tone	RU53	-10.07	≤4.50	PASS	
		242Tone	RU61	-14.86	≤4.50	PASS	
		484Tone	RU65	-14.30	≤4.50	PASS	
		26Tone	RU0	-0.09	≤4.50	PASS	
Ant2	2437	52Tone	RU37	-2.97	≤4.50	PASS	
		106Tone	RU53	-4.38	≤4.50	PASS	
		242Tone	RU61	-9.31	≤4.50	PASS	
		484Tone	RU65	-8.54	≤4.50	PASS	
Ant3	2437	26Tone	RU0	-4.95	≤4.50	PASS	
		52Tone	RU37	-7.49	≤4.50	PASS	
		106Tone	RU53	-8.28	≤4.50	PASS	
		242Tone	RU61	-12.13	≤4.50	PASS	
Ant4	2437	484Tone	RU65	-12.93	≤4.50	PASS	
		26Tone	RU0	-4.36	≤4.50	PASS	
		52Tone	RU37	-7.91	≤4.50	PASS	
		106Tone	RU53	-8.40	≤4.50	PASS	
total	2437	242Tone	RU61	-12.38	≤4.50	PASS	
		484Tone	RU65	-12.60	≤4.50	PASS	
		26Tone	RU0	-4.52	≤4.50	PASS	
		52Tone	RU37	-7.80	≤4.50	PASS	
Ant1	2452	106Tone	RU53	-8.16	≤4.50	PASS	
		242Tone	RU61	-12.95	≤4.50	PASS	
		484Tone	RU65	-12.91	≤4.50	PASS	
		26Tone	RU0	-6.15	≤4.50	PASS	
total	2437	52Tone	RU37	-7.35	≤4.50	PASS	
		106Tone	RU53	-9.24	≤4.50	PASS	
		242Tone	RU61	-12.82	≤4.50	PASS	
		484Tone	RU65	-12.43	≤4.50	PASS	
Ant1	2452	26Tone	RU0	1.08	≤4.50	PASS	
		52Tone	RU37	-1.61	≤4.50	PASS	
		106Tone	RU53	-2.48	≤4.50	PASS	
		242Tone	RU61	-6.54	≤4.50	PASS	
Ant1	2452	484Tone	RU65	-6.69	≤4.50	PASS	
		26Tone	RU0	-6.24	≤4.50	PASS	
		52Tone	RU37	-7.68	≤4.50	PASS	
		106Tone	RU53	-10.85	≤4.50	PASS	
Ant1	2452	242Tone	RU61	-15.22	≤4.50	PASS	
		484Tone	RU65	-15.22	≤4.50	PASS	

	Ant2	2452	484Tone	RU65	-14.58	≤4.50	PASS
			26Tone	RU0	-7.69	≤4.50	PASS
			52Tone	RU37	-8.56	≤4.50	PASS
			106Tone	RU53	-10.67	≤4.50	PASS
			242Tone	RU61	-14.07	≤4.50	PASS
	Ant3	2452	484Tone	RU65	-14.43	≤4.50	PASS
			26Tone	RU0	-7.86	≤4.50	PASS
			52Tone	RU37	-8.65	≤4.50	PASS
			106Tone	RU53	-10.71	≤4.50	PASS
			242Tone	RU61	-14.72	≤4.50	PASS
	Ant4	2452	484Tone	RU65	-13.16	≤4.50	PASS
			26Tone	RU0	-7.30	≤4.50	PASS
			52Tone	RU37	-8.72	≤4.50	PASS
			106Tone	RU53	-10.39	≤4.50	PASS
			242Tone	RU61	-15.02	≤4.50	PASS
	total	2452	484Tone	RU65	-13.46	≤4.50	PASS
			26Tone	RU0	-1.20	≤4.50	PASS
			52Tone	RU37	-2.36	≤4.50	PASS
			106Tone	RU53	-4.63	≤4.50	PASS
			242Tone	RU61	-8.71	≤4.50	PASS
			484Tone	RU65	-7.84	≤4.50	PASS

Note:

The maximum antenna gain is 3.5dBi.

For 802.11b/g mode, the device employed cyclic delay diversity (CDD).

According to KDB 662911 D01 v02r01, for power measurement on IEEE 802.11 devices:

Array Gain = $10 \cdot \log(4/1) = 6 \text{ dB}$; So Directional gain = $G_{ANT} + \text{Array Gain} = 9.5 \text{ dBi} > 6 \text{ dBi}$

So, for FCC the limit should be reduce $(9.5-6) \text{ dB} = 3.5 \text{ dB}$

For 802.11n/ax mode, the device support beam-forming function.

The directional gain = $G_{ANT} + 10 \cdot \log(4/1) = 9.5 \text{ dBi} > 6 \text{ dBi}$;

So, for FCC the limit should be reduce $(9.5-6) \text{ dB} = 3.5 \text{ dB}$

Test Graphs

