

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 1 of 715

TEST REPORT

Application No.: SZCR2410003755AT
Applicant: Grandstream Networks, Inc.
Address of Applicant: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Manufacturer: Grandstream Networks, Inc.
Address of Manufacturer: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Equipment Under Test (EUT):
EUT Name: Dual-Band Wi-Fi 7 Access Point
Model No.: GWN7670
Trade Mark: GRANDSTREAM
FCC ID: YZZGWN7670
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2024-10-11
Date of Test: 2024-10-16 to 2024-11-24
Date of Issue: 2024-11-26

Test Result:**Pass***

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 2 of 715

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2024-11-26		Original

Authorized for issue by:				
		Calvin Weng		
		Calvin Weng/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Maximum Conducted output power		ANSI C63.10 (2013) Section 12.3	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Duty Cycle		ANSI C63.10 (2013) Section 12.2	ANSI C63.10 (2013) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2013) Section 12.4.2	ANSI C63.10 (2013) Section 12.4.2	Pass
26dB Emission bandwidth		ANSI C63.10 (2013) Section 12.4.1	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		ANSI C63.10 (2013) Section 6.9.2	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Peak Power spectrum density		ANSI C63.10 (2013) Section 12.5	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Frequency Stability		ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass
Transmitter Power Control		ANSI C63.10 (2013) Section 12.3	47 CFR Part 15, Subpart E 15.407 (h)(1)	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location	8
4.5 Test Facility	8
4.6 Deviation from Standards	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement	12
6.1 Antenna Requirement	12
6.1.1 Test Requirement:	12
6.1.2 Conclusion	12
6.2 Transmission in the Absence of Data	13
6.2.1 Test Requirement:	13
6.2.2 Conclusion	13
7 Radio Spectrum Matter Test Results	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	14
7.1.1 E.U.T. Operation	14
7.1.2 Test Mode Description	14
7.1.3 Test Setup Diagram	15
7.1.4 Measurement Procedure and Data	15
7.2 Maximum Conducted output power	18
7.2.1 E.U.T. Operation	18
7.2.2 Test Mode Description	18
7.2.3 Test Setup Diagram	19
7.2.4 Measurement Procedure and Data	19
7.3 Radiated Emissions (Below 1GHz)	20
7.3.1 E.U.T. Operation	20
7.3.2 Test Mode Description	20
7.3.3 Test Setup Diagram	21
7.3.4 Measurement Procedure and Data	22
7.4 Radiated Emissions (Above 1GHz)	25
7.4.1 E.U.T. Operation	25
7.4.2 Test Mode Description	26
7.4.3 Test Setup Diagram	26



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 5 of 715

7.4.4	Measurement Procedure and Data.....	27
7.5	Radiated Emissions which fall in the restricted bands	158
7.5.1	E.U.T. Operation	159
7.5.2	Test Mode Description	159
7.5.3	Test Setup Diagram	160
7.5.4	Measurement Procedure and Data.....	161
7.6	Duty Cycle	368
7.6.1	E.U.T. Operation	368
7.6.2	Test Mode Description	368
7.6.3	Test Setup Diagram	368
7.6.4	Measurement Procedure and Data.....	368
7.7	99% Bandwidth	369
7.7.1	E.U.T. Operation	369
7.7.2	Test Mode Description	369
7.7.3	Test Setup Diagram	369
7.7.4	Measurement Procedure and Data.....	369
7.8	26dB Emission bandwidth	370
7.8.1	E.U.T. Operation	370
7.8.2	Test Mode Description	370
7.8.3	Test Setup Diagram	370
7.8.4	Measurement Procedure and Data.....	370
7.9	Minimum 6 dB bandwidth (5.725-5.85 GHz band)	371
7.9.1	E.U.T. Operation	371
7.9.2	Test Mode Description	371
7.9.3	Test Setup Diagram	371
7.9.4	Measurement Procedure and Data.....	371
7.10	Peak Power spectrum density.....	372
7.10.1	E.U.T. Operation.....	372
7.10.2	Test Mode Description.....	372
7.10.3	Test Setup Diagram.....	373
7.10.4	Measurement Procedure and Data	373
7.11	Frequency Stability	374
7.11.1	E.U.T. Operation.....	374
7.11.2	Test Mode Description.....	374
7.11.3	Test Setup Diagram.....	374
7.11.4	Measurement Procedure and Data	374
7.12	Transmitter Power Control	375
7.12.1	E.U.T. Operation.....	375
7.12.2	Test Mode Description.....	375
7.12.3	Test Setup Diagram.....	375
7.12.4	Measurement Procedure and Data	375
8	Test Setup Photo	376
9	EUT Constructional Details (EUT Photos)	376
10	Appendix.....	377



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	Powered by POE DC48V
Cable Loss (for RF conducted test):	1.5dB
Operation Frequency / Number of channels (20MHz):	U-NII-1:5180-5240MHz (4 Channels) U-NII-2A: 5260-5320MHz (4 Channels) U-NII-2C: 5500-5720MHz (12 Channels) U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency / Number of channels(40MHz):	U-NII-1:5190-5230MHz (2 Channels) U-NII-2A: 5270-5310MHz (2 Channels) U-NII-2C: 5510-5710MHz (6 Channels) U-NII-3: 5755-5795MHz (2 Channels)
Operation Frequency / Number of channels (80MHz):	U-NII-1:5210MHz (1 Channel) U-NII-2A: 5290MHz (1 Channel) U-NII-2C: 5530-5690MHz (3 Channels) U-NII-3: 5775MHz (1 Channel)
Operation Frequency / Number of channels (160MHz):	U-NII-1/2A:5250MHz (1 Channel) U-NII-2C: 5570MHz (1 Channel)
Modulation Type:	802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM); 802.11be: OFDMA with enhancements (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM, 4096-QAM)
Channel Spacing:	802.11a/n/ac/ax/be 20: 20MHz; 802.11n/ac/ax/be 40: 40MHz; 802.11ac/ax/be 80: 80MHz;802.11ac/ax/be 160: 320MHz
DFS Function:	Master
TPC Function:	Support TPC function
Antenna Type:	PIFA Antenna
Antenna Gain:	Ant1:5.73dBi, Ant2:5.85dBi

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.1\text{dB}$
Maximum Conducted output power	$\pm 0.75\text{dB}$
Radiated Emissions (Below 1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
Duty Cycle	$\pm 0.37\%$
99% Bandwidth	$\pm 3\%$
26dB Emission bandwidth	$\pm 3\%$
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	$\pm 3\%$
Peak Power spectrum density	$\pm 2.84\text{dB}$
Frequency Stability	$\pm 7.25 \times 10^{-8}$
Transmitter Power Control	$\pm 0.75\text{dB}$



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 8 of 715

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2022-05-14	2025-05-13
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2024-01-30	2025-01-29
Matching Pad	N/A	N/A	SEM021-23	2024-03-20	2025-03-19
Matching Pad	N/A	N/A	SEM021-24	2024-03-20	2025-03-19
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2024-07-06	2025-07-05
LISN	Rohde&Schwarz	ENV216	SEM007-01	2024-08-15	2025-08-14
LISN	ETS-LINDGREN	3816/2	SEM007-02	2024-03-14	2025-03-13

Maximum Conducted output power					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2024-03-27	2025-03-26
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2024-03-14	2025-03-13
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 10 of 715

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2024-08-14	2025-08-13
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2023-09-16	2025-09-15
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2024-03-14	2025-03-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2024-07-06	2025-07-05

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2024-05-11	2027-05-10
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2024-03-15	2025-03-14
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2024-09-14	2025-09-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2024-07-06	2025-07-05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2024-08-10	2025-08-09
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2024-03-15	2025-03-14

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2024-05-11	2027-05-10
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2024-03-15	2025-03-14
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2024-09-14	2025-09-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2024-07-06	2025-07-05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 11 of 715

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2024-03-14	2025-03-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2024-03-27	2025-03-26
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2024-03-19	2025-03-18

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2024-07-24	2025-07-23
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2024-07-24	2025-07-23
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2024-03-18	2025-03-17



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is Ant1:5.73dBi, Ant2:5.85dBi. Directional gain: $(5.85+3.01)\text{dBi}=8.86\text{dBi}$

Antenna location: Refer to internal photos



6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 45.5 % RH


Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.



7.1.3 Test Setup Diagram

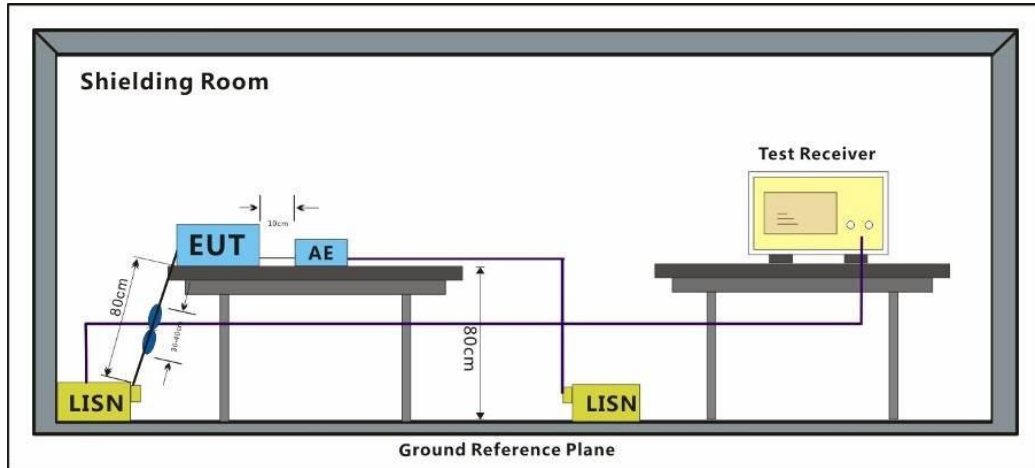

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 50\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 16 of 715

Test Mode: 03; Line: Live line

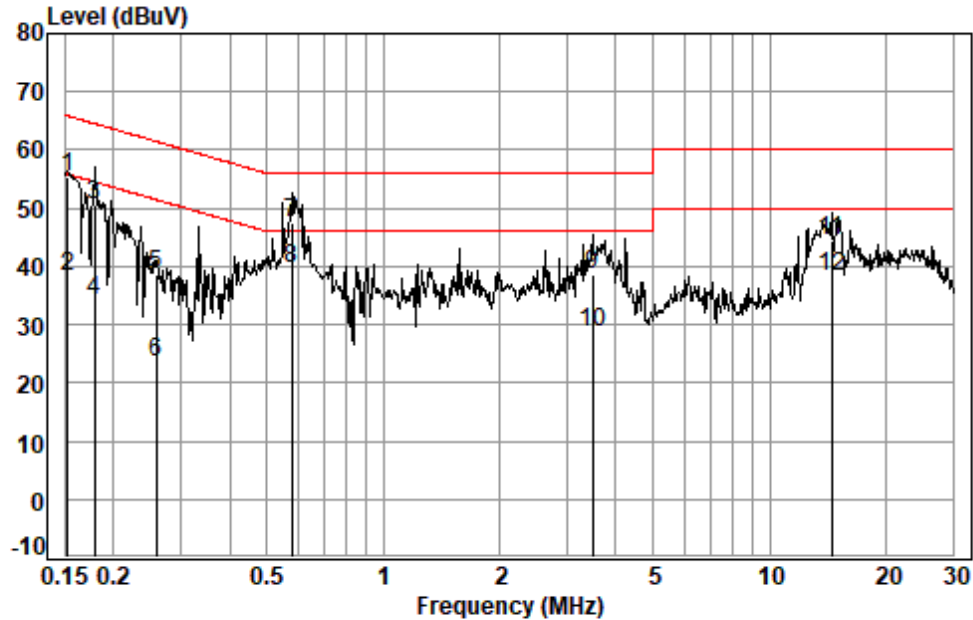

Site : Shielding Room
Condition: Line
Job No. : 03755AT
Test mode: 03

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1524	0.06	9.81	45.35	55.22	65.87	-10.65	QP
2	0.1524	0.06	9.81	28.46	38.33	55.87	-17.54	Average
3	0.1787	0.06	9.80	40.66	50.52	64.55	-14.03	QP
4	0.1787	0.06	9.80	24.34	34.20	54.55	-20.35	Average
5	0.2589	0.07	9.77	28.88	38.72	61.47	-22.75	QP
6	0.2589	0.07	9.77	13.64	23.48	51.47	-27.99	Average
7 *	0.5792	0.08	9.71	37.79	47.58	56.00	-8.42	QP
8 *	0.5792	0.08	9.71	29.89	39.68	46.00	-6.32	Average
9	3.4906	0.11	9.65	28.95	38.71	56.00	-17.29	QP
10	3.4906	0.11	9.65	19.07	28.83	46.00	-17.17	Average
11	14.5171	0.26	10.10	33.94	44.30	60.00	-15.70	QP
12	14.5171	0.26	10.10	28.04	38.40	50.00	-11.60	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 17 of 715

Test Mode: 03; Line: Neutral Line

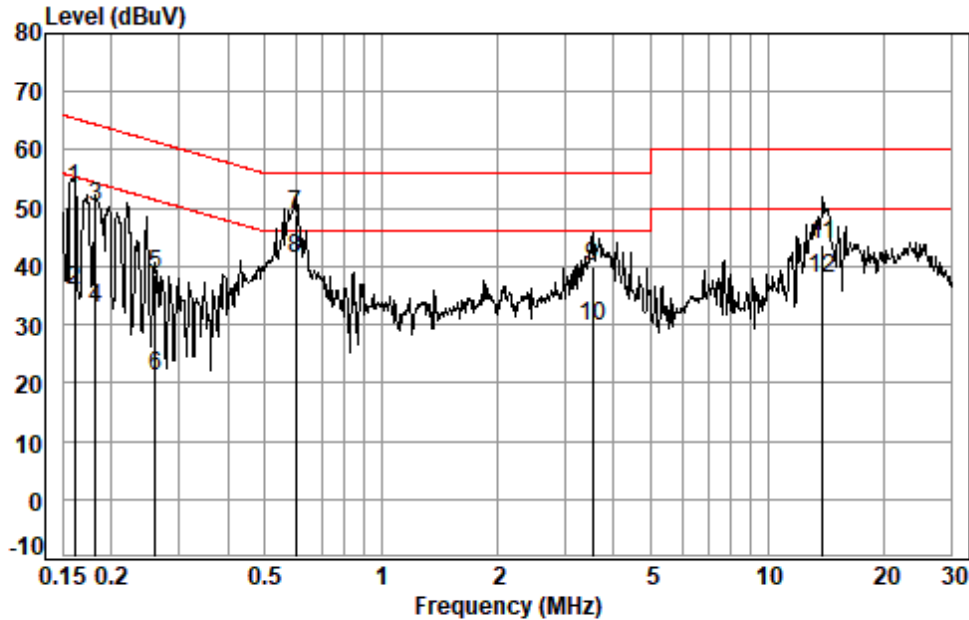

Site : Shielding Room
Condition: Neutral
Job No. : 03755AT
Test mode: 03

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1607	0.06	9.82	43.58	53.46	65.43	-11.97	QP
2	0.1607	0.06	9.82	26.07	35.95	55.43	-19.48	Average
3	0.1825	0.06	9.82	40.21	50.09	64.37	-14.28	QP
4	0.1825	0.06	9.82	22.75	32.63	54.37	-21.74	Average
5	0.2603	0.07	9.80	28.62	38.49	61.42	-22.93	QP
6	0.2603	0.07	9.80	11.16	21.03	51.42	-30.39	Average
7 *	0.6011	0.08	9.72	39.22	49.02	56.00	-6.98	QP
8 *	0.6011	0.08	9.72	31.64	41.44	46.00	-4.56	Average
9	3.5278	0.11	9.67	30.07	39.85	56.00	-16.15	QP
10	3.5278	0.11	9.67	20.01	29.79	46.00	-16.21	Average
11	13.9146	0.25	10.14	33.37	43.76	60.00	-16.24	QP
12	13.9146	0.25	10.14	27.68	38.07	50.00	-11.93	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.3

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	<p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C

Humidity: 34.0 % RH


Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.



7.2.3 Test Setup Diagram

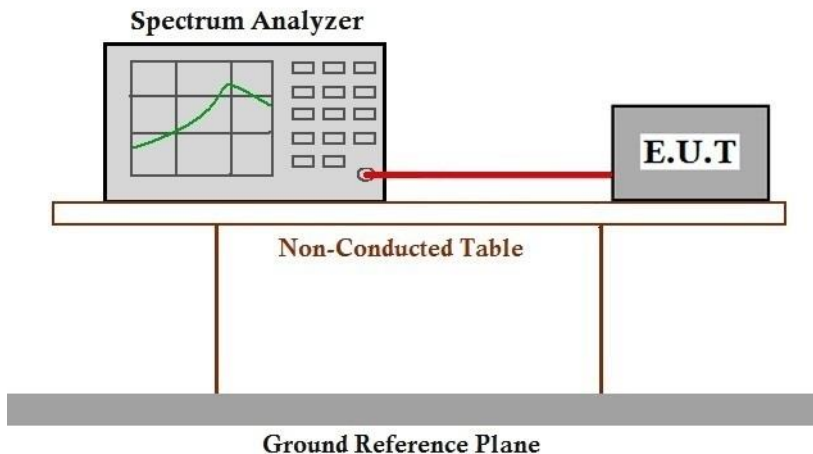

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.3 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 47.5 % RH


Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.



7.3.3 Test Setup Diagram

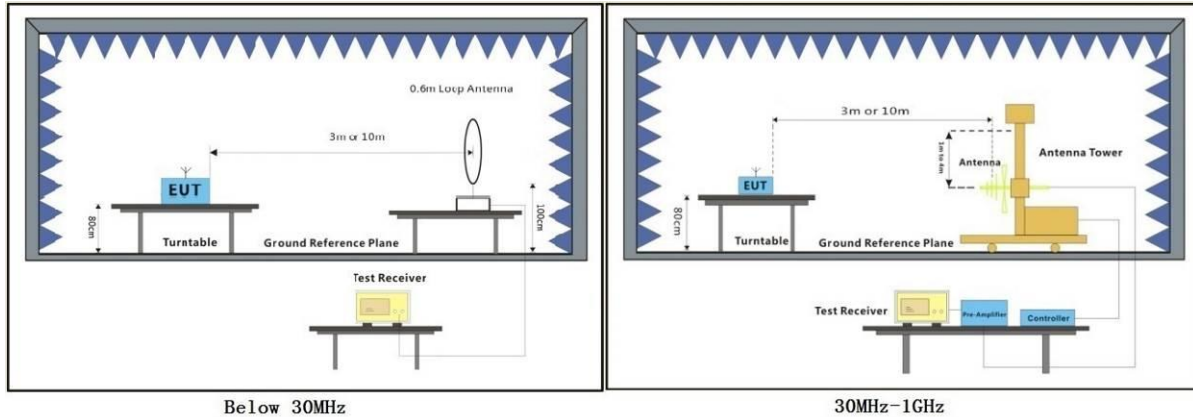

Below 30MHz

30MHz-1GHz



7.3.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Test Mode: 03; Polarity: Horizontal

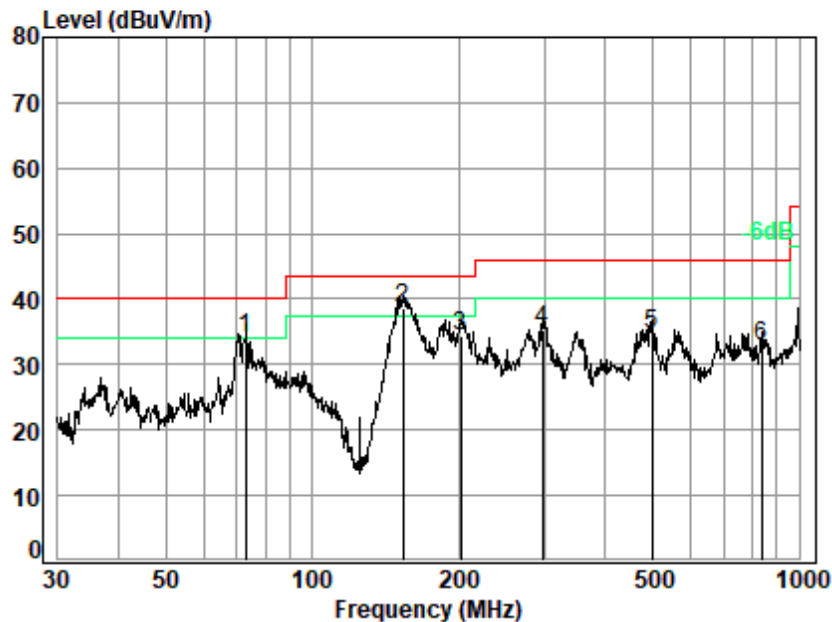

Site : chamber
Condition: 3m HORIZONTAL
Job No. : 03755AT/03756AT
Test Mode: 03

	Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	73.103	10.43	1.04	27.67	50.27	34.07	40.00	-5.93 QP
2 q	153.739	13.43	1.56	27.36	50.97	38.60	43.50	-4.90 QP
3	201.393	14.22	1.77	27.16	45.69	34.52	43.50	-8.98 QP
4	297.224	17.69	2.19	26.76	42.05	35.17	46.00	-10.83 QP
5	497.677	22.87	2.91	27.55	36.43	34.66	46.00	-11.34 QP
6	839.182	26.53	3.97	27.20	29.68	32.98	46.00	-13.02 QP




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical

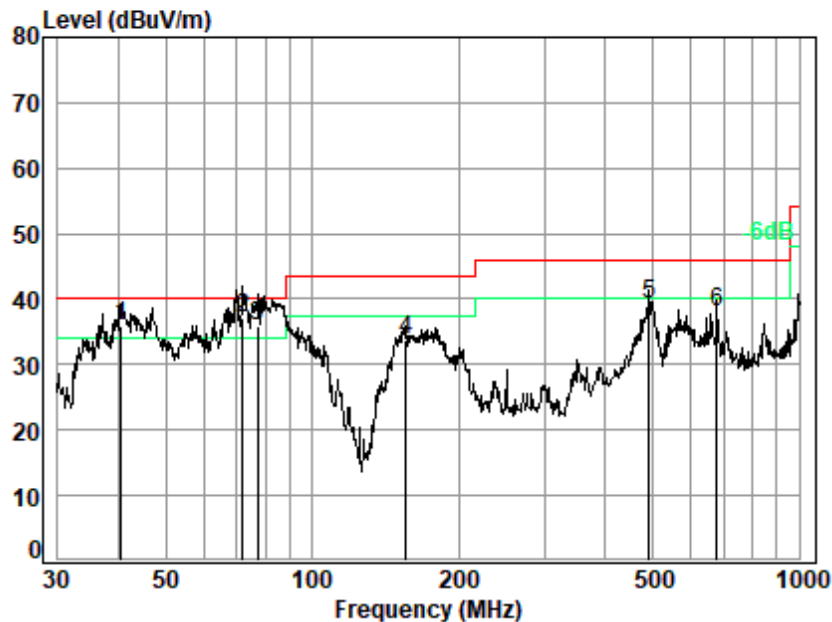

Site : chamber

Condition: 3m VERTICAL

Job No. : 03755AT/03756AT

Test Mode: 03

		Ant	Cable	Preamp	Read	Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	40.417	16.20	0.78	27.76	46.74	35.96	40.00	-4.04 QP
2 q	72.084	10.48	1.04	27.67	53.12	36.97	40.00	-3.03 QP
3	77.051	10.39	1.07	27.66	52.06	35.86	40.00	-4.14 QP
4	155.910	13.58	1.57	27.36	46.07	33.86	43.50	-9.64 QP
5	490.745	22.84	2.89	27.53	41.19	39.39	46.00	-6.61 QP
6	677.580	25.78	3.48	27.78	36.46	37.94	46.00	-8.06 QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1GHz	500	3
<p>*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(4) For transmitters operating in the 5.725-5.85 GHz band:</p> <p>(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <p>Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p>		

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C

Humidity: 69.1 % RH


Atmospheric Pressure: 1020 mbar



7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

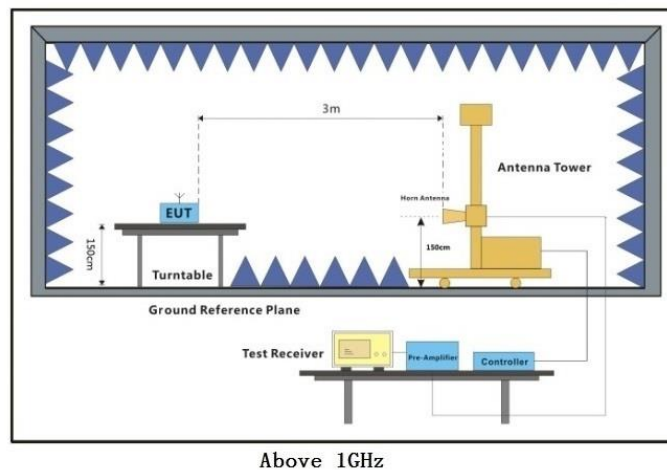

7.4.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

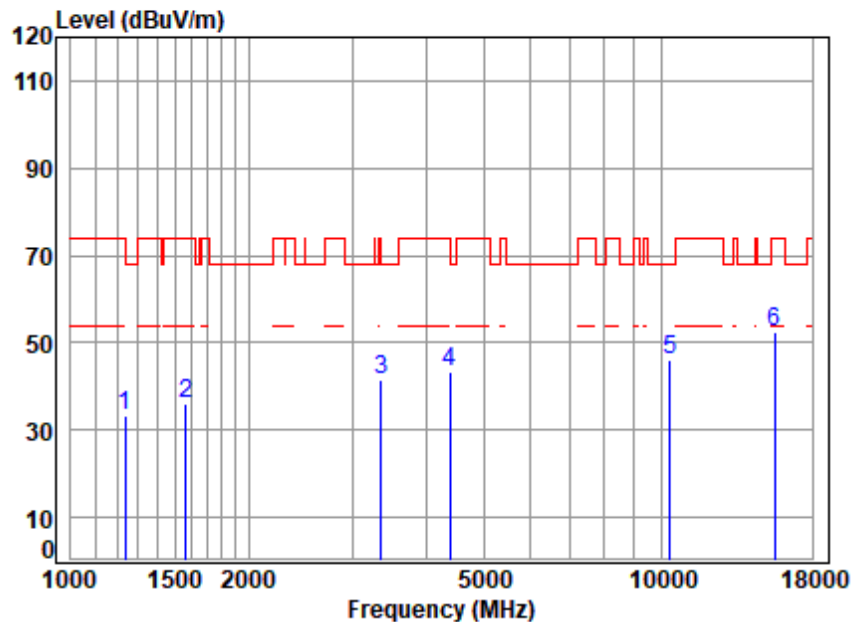


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.40	66.29	33.51	74.00	-40.49	peak
2	1569.721	4.14	26.92	61.51	66.67	36.22	74.00	-37.78	peak
3	3357.061	6.40	32.14	61.56	64.33	41.31	74.00	-32.69	peak
4	4392.376	7.13	34.74	61.20	62.63	43.30	74.00	-30.70	peak
5	10360.000	11.14	37.10	61.44	59.25	46.05	68.20	-22.15	peak
6	p15540.000	13.79	41.10	61.25	58.86	52.50	74.00	-21.50	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

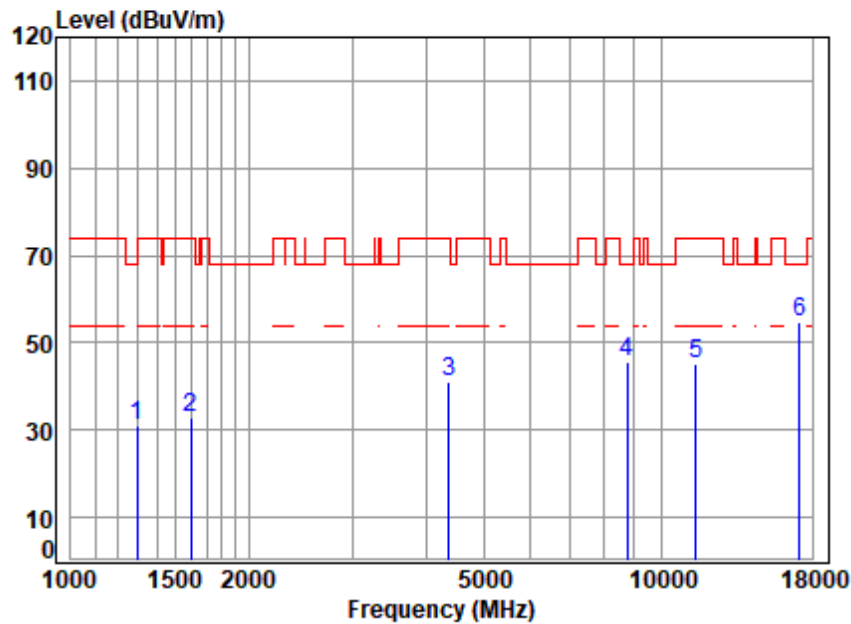

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5720 TX RSE
Note : 5G WIFI 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	54.71	57.08	31.01	68.20	-37.19	peak
2	1597.181	4.18	26.81	54.80	56.66	32.85	74.00	-41.15	peak
3	4367.058	7.10	34.54	54.26	53.84	41.22	74.00	-32.78	peak
4	8764.146	9.74	36.96	53.49	52.64	45.85	68.20	-22.35	peak
5	11440.000	11.92	37.74	53.09	48.66	45.23	74.00	-28.77	peak
6	17160.000	14.50	43.04	52.82	50.19	54.91	68.20	-13.29	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

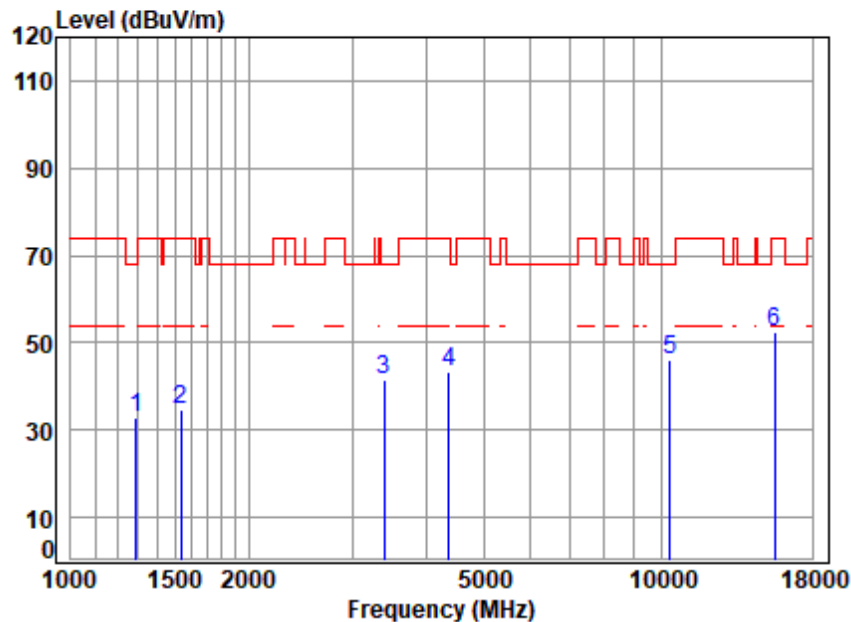


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	65.55	32.79	68.20	-35.41	peak
2	1538.281	4.10	26.95	61.50	65.20	34.75	74.00	-39.25	peak
3	3396.098	6.43	32.38	61.55	64.15	41.41	68.20	-26.79	peak
4	4367.058	7.10	34.54	61.21	62.97	43.40	74.00	-30.60	peak
5	10360.000	11.14	37.10	61.44	59.42	46.22	68.20	-21.98	peak
6	p15540.000	13.79	41.10	61.25	58.91	52.55	74.00	-21.45	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

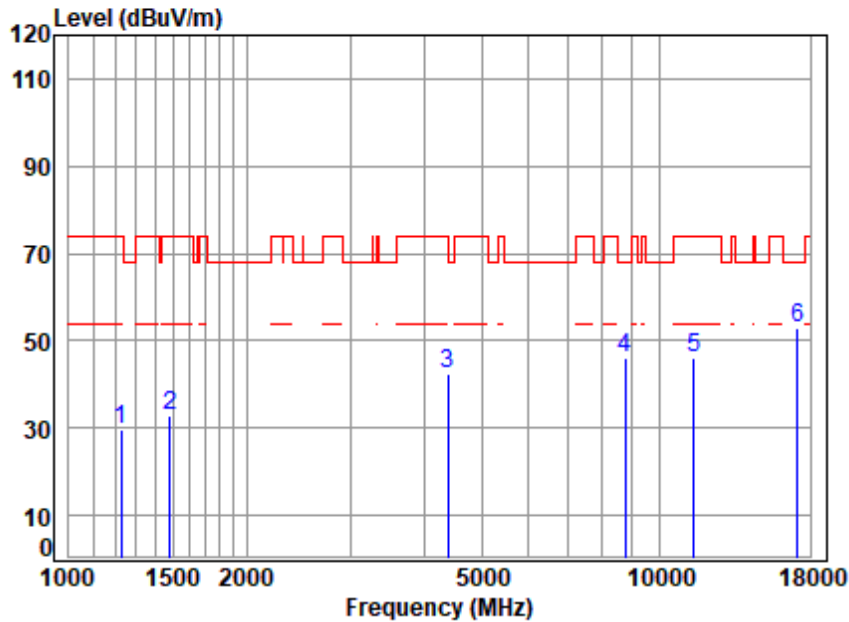


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5720 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	54.69	55.68	29.50	74.00	-44.50	peak
2	1481.553	4.02	26.28	54.77	57.30	32.83	74.00	-41.17	peak
3	4379.699	7.11	34.64	54.26	54.77	42.26	74.00	-31.74	peak
4	8764.146	9.74	36.96	53.49	53.00	46.21	68.20	-21.99	peak
5	11440.000	11.92	37.74	53.09	49.73	46.30	74.00	-27.70	peak
6	p17160.000	14.50	43.04	52.82	48.21	52.93	68.20	-15.27	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

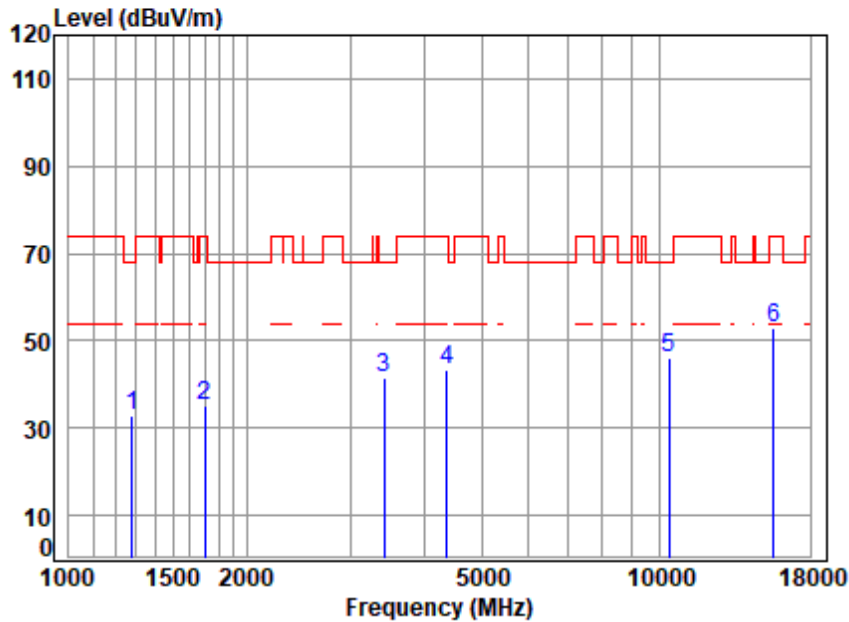


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.41	65.63	32.92	68.20	-35.28	peak
2	1697.129	4.32	26.21	61.54	66.18	35.17	74.00	-38.83	peak
3	3415.787	6.45	32.21	61.54	64.59	41.71	68.20	-26.49	peak
4	4367.058	7.10	34.54	61.21	62.91	43.34	74.00	-30.66	peak
5	10400.000	11.20	37.10	61.44	59.13	45.99	68.20	-22.21	peak
6	15600.000	13.86	41.10	61.24	59.33	53.05	74.00	-20.95	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

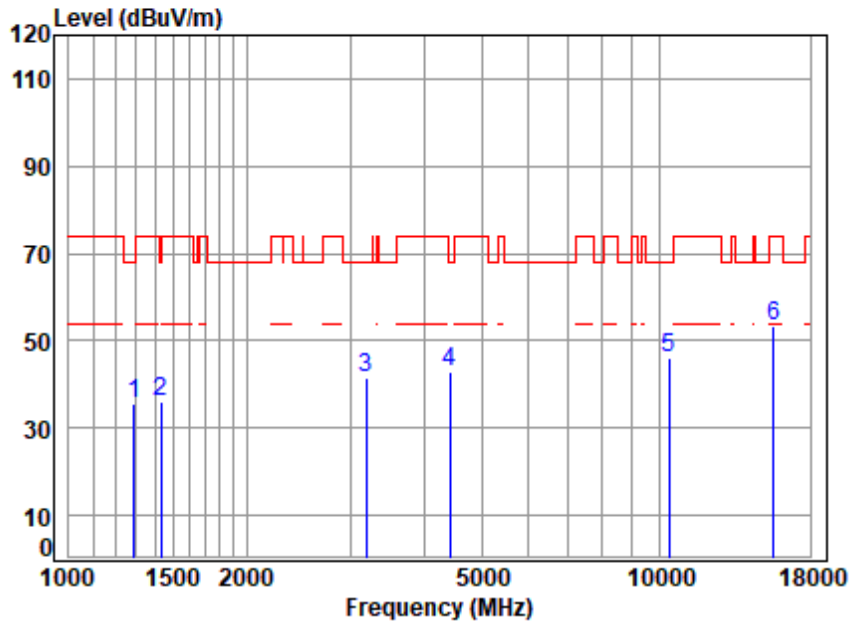


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5200 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	68.28	35.52	68.20	-32.68	peak
2	1431.047	3.96	25.10	61.47	68.55	36.14	68.20	-32.06	peak
3	3186.869	6.25	32.79	61.62	63.92	41.34	68.20	-26.86	peak
4	4417.841	7.16	34.59	61.19	62.50	43.06	68.20	-25.14	peak
5	10400.000	11.20	37.10	61.44	59.04	45.90	68.20	-22.30	peak
6	p15600.000	13.86	41.10	61.24	59.68	53.40	74.00	-20.60	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

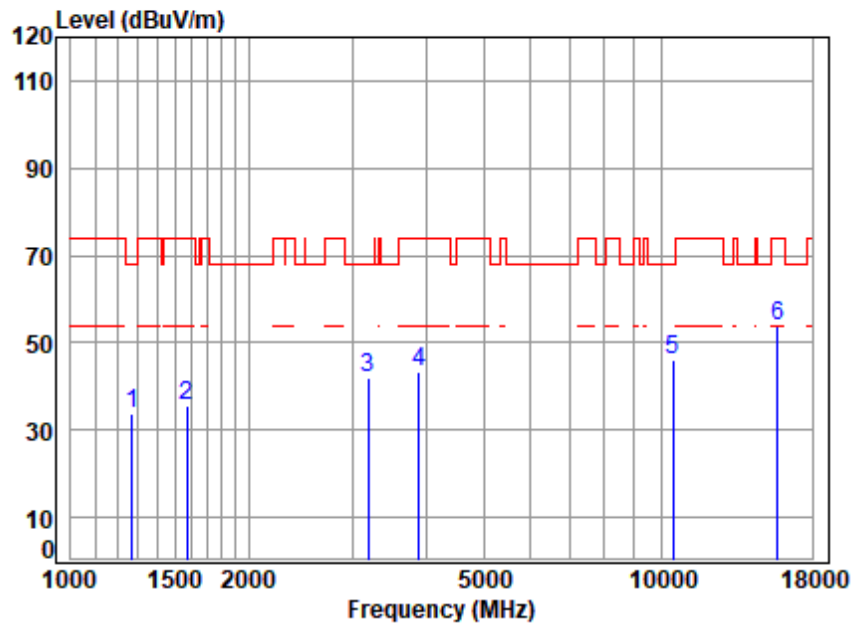


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5240 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	3.77	24.97	61.41	66.23	33.56	68.20	-34.64	peak
2	1574.265	4.15	26.90	61.51	65.96	35.50	74.00	-38.50	peak
3	3186.869	6.25	32.79	61.62	64.76	42.18	68.20	-26.02	peak
4	3890.255	6.62	33.66	61.41	64.59	43.46	74.00	-30.54	peak
5	10480.000	11.33	37.26	61.44	58.99	46.14	68.20	-22.06	peak
6	p15720.000	14.01	41.22	61.22	59.96	53.97	74.00	-20.03	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

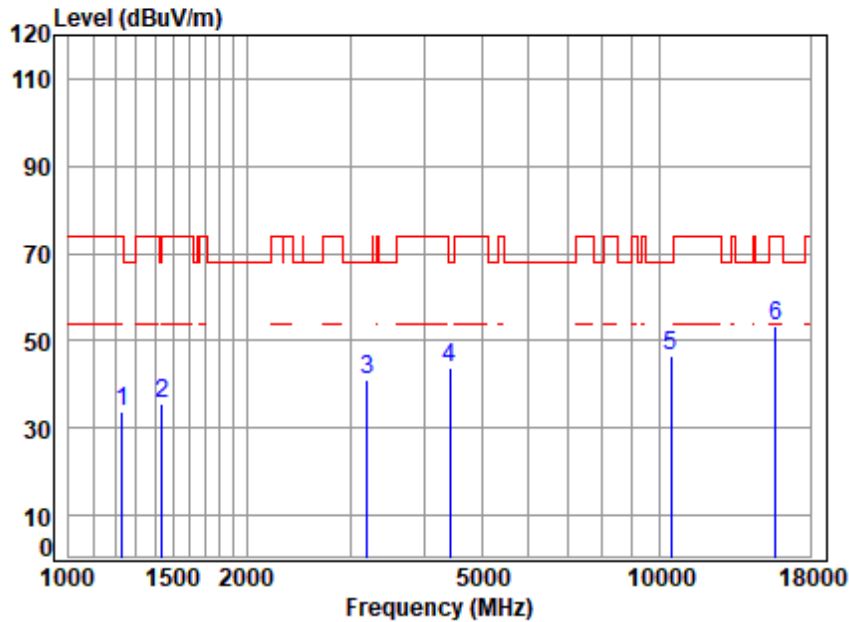


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5240 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.40	66.63	33.79	74.00	-40.21	peak
2	1439.343	3.97	25.23	61.47	67.95	35.68	74.00	-38.32	peak
3	3196.094	6.25	32.87	61.61	63.71	41.22	68.20	-26.98	peak
4	4417.841	7.16	34.59	61.19	63.18	43.74	68.20	-24.46	peak
5	10480.000	11.33	37.26	61.44	59.21	46.36	68.20	-21.84	peak
6	p15720.000	14.01	41.22	61.22	59.56	53.57	74.00	-20.43	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

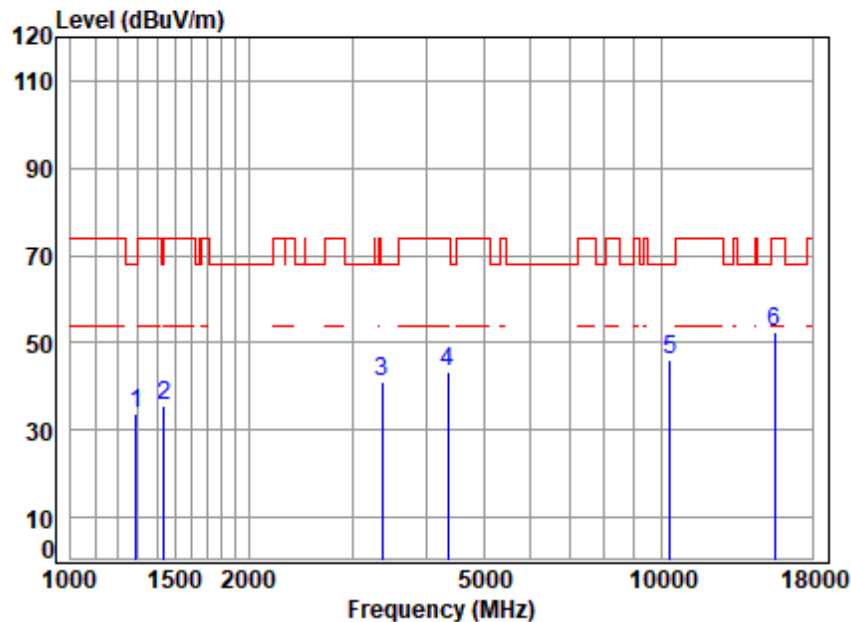


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.35	33.59	68.20	-34.61	peak
2	1439.343	3.97	25.23	61.47	67.77	35.50	74.00	-38.50	peak
3	3366.778	6.41	32.20	61.56	64.14	41.19	68.20	-27.01	peak
4	4354.454	7.08	34.44	61.22	63.24	43.54	74.00	-30.46	peak
5	10360.000	11.14	37.10	61.44	59.41	46.21	68.20	-21.99	peak
6	p15540.000	13.79	41.10	61.25	58.89	52.53	74.00	-21.47	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

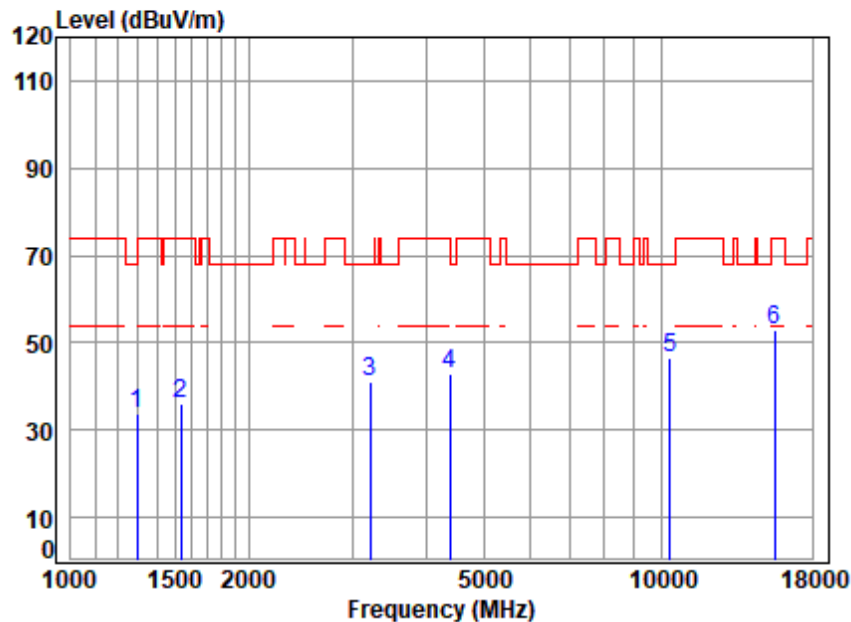


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5180 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	66.52	33.74	68.20	-34.46	peak
2	1533.841	4.09	26.94	61.50	66.39	35.92	74.00	-38.08	peak
3	3214.623	6.27	32.67	61.61	63.87	41.20	68.20	-27.00	peak
4	4379.699	7.11	34.64	61.21	62.42	42.96	74.00	-31.04	peak
5	10360.000	11.14	37.10	61.44	59.88	46.68	68.20	-21.52	peak
6	p15540.000	13.79	41.10	61.25	59.11	52.75	74.00	-21.25	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

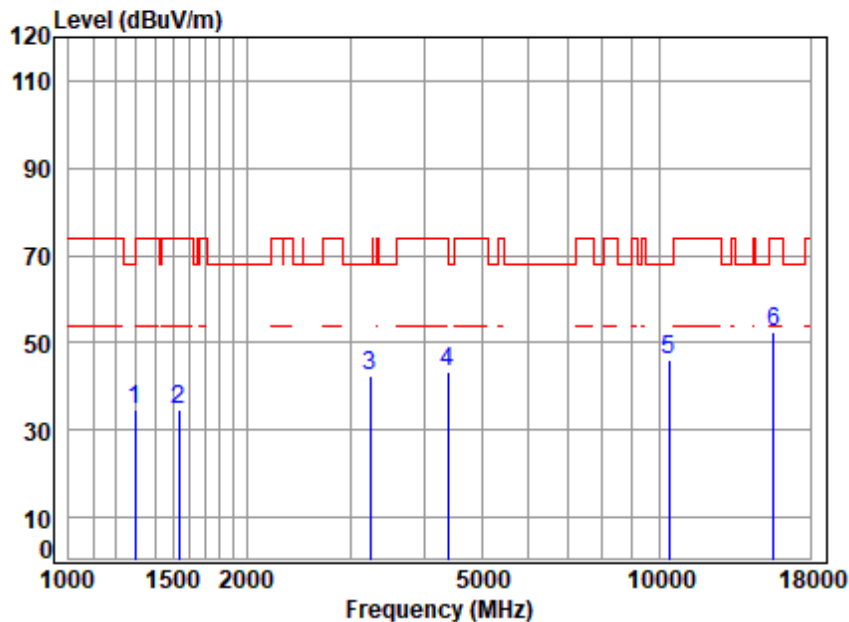


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5200 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	67.27	34.49	68.20	-33.71	peak
2	1533.841	4.09	26.94	61.50	65.21	34.74	74.00	-39.26	peak
3	3242.619	6.30	32.22	61.60	65.35	42.27	68.20	-25.93	peak
4	4379.699	7.11	34.64	61.21	62.76	43.30	74.00	-30.70	peak
5	10400.000	11.20	37.10	61.44	59.14	46.00	68.20	-22.20	peak
6	p15600.000	13.86	41.10	61.24	58.87	52.59	74.00	-21.41	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

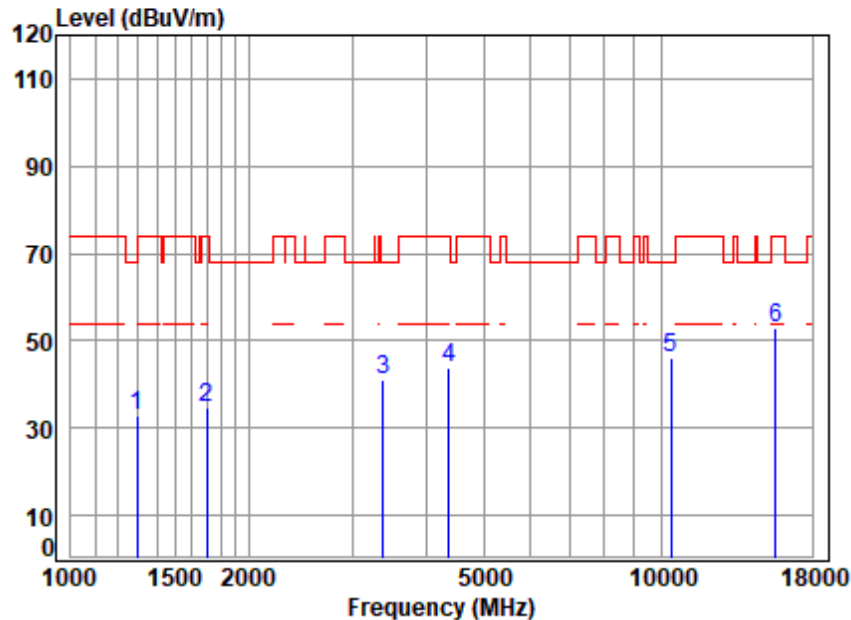


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5200 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	65.67	32.89	68.20	-35.31	peak
2	1702.042	4.33	26.22	61.55	65.83	34.83	74.00	-39.17	peak
3	3386.297	6.42	32.32	61.55	63.89	41.08	68.20	-27.12	peak
4	4367.058	7.10	34.54	61.21	63.55	43.98	74.00	-30.02	peak
5	10400.000	11.20	37.10	61.44	59.22	46.08	68.20	-22.12	peak
6	p15600.000	13.86	41.10	61.24	59.17	52.89	74.00	-21.11	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

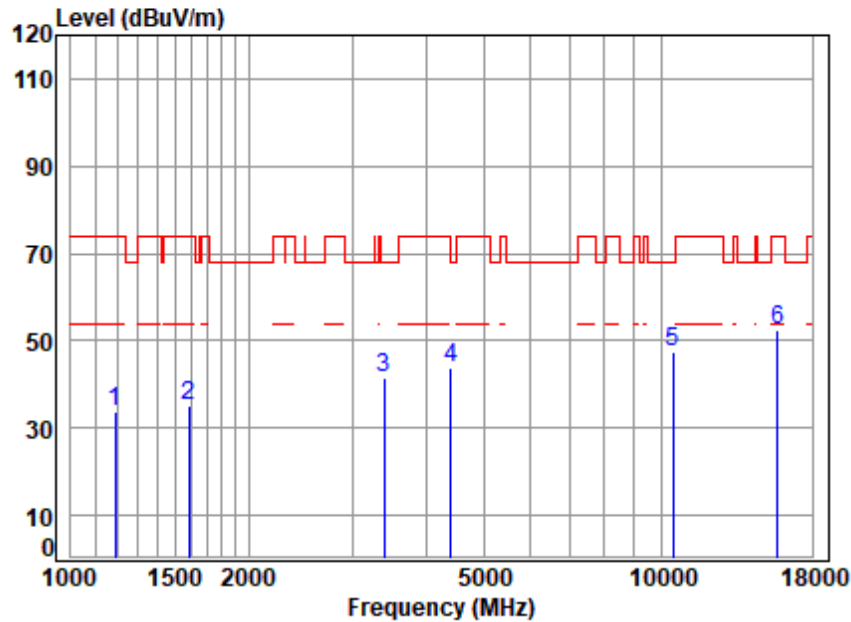


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.38	67.33	33.91	74.00	-40.09	peak
2	1587.975	4.17	26.85	61.51	65.47	34.98	74.00	-39.02	peak
3	3396.098	6.43	32.38	61.55	64.46	41.72	68.20	-26.48	peak
4	4405.090	7.14	34.74	61.20	62.98	43.66	68.20	-24.54	peak
5	10480.000	11.33	37.26	61.44	60.51	47.66	68.20	-20.54	peak
6	15720.000	14.01	41.22	61.22	58.66	52.67	74.00	-21.33	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

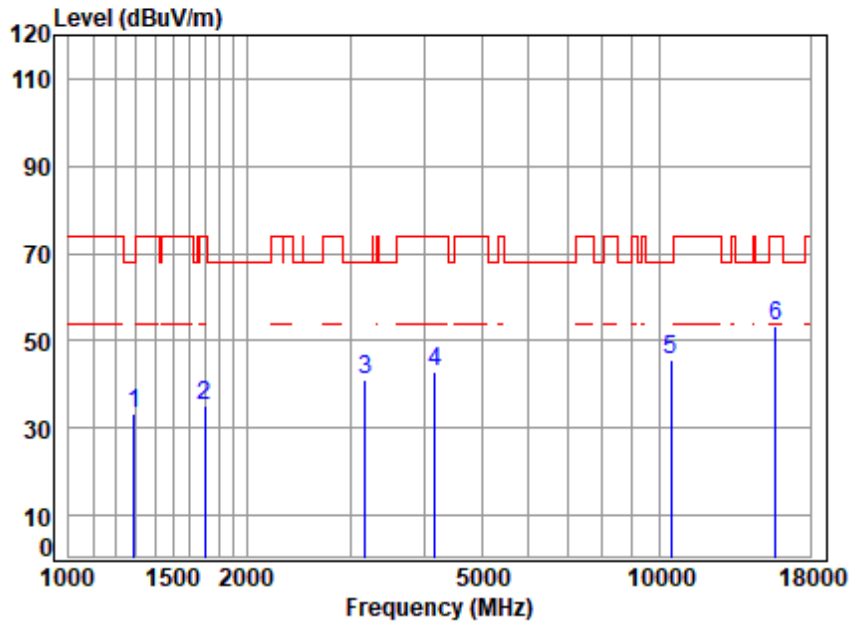


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	65.88	33.12	68.20	-35.08	peak
2	1702.042	4.33	26.22	61.55	66.27	35.27	74.00	-38.73	peak
3	3177.672	6.24	32.72	61.62	63.76	41.10	68.20	-27.10	peak
4	4169.698	6.86	33.80	61.30	63.63	42.99	74.00	-31.01	peak
5	10480.000	11.33	37.26	61.44	58.45	45.60	68.20	-22.60	peak
6	15720.000	14.01	41.22	61.22	59.16	53.17	74.00	-20.83	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

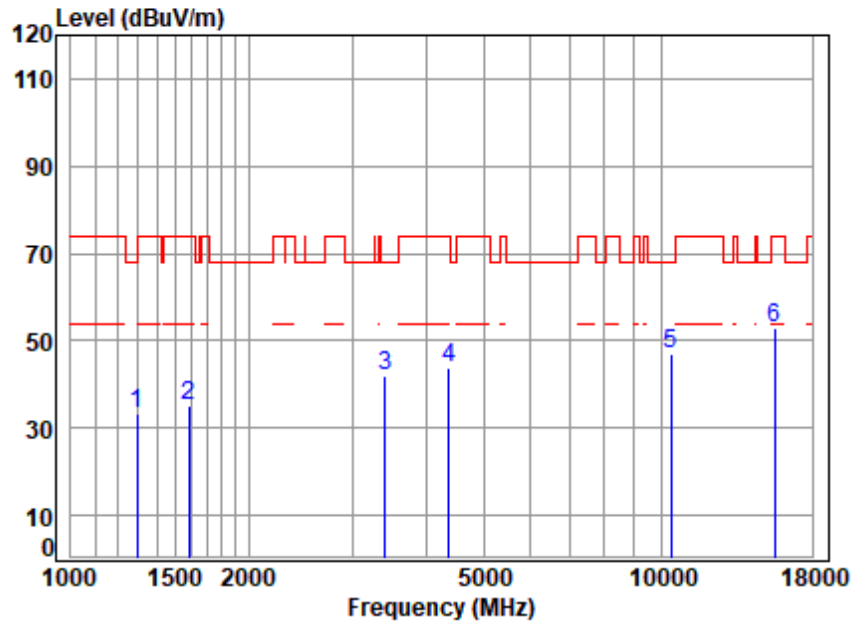


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5190 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	66.13	33.35	68.20	-34.85	peak
2	1587.975	4.17	26.85	61.51	65.57	35.08	74.00	-38.92	peak
3	3405.929	6.44	32.33	61.55	64.83	42.05	68.20	-26.15	peak
4	4367.058	7.10	34.54	61.21	63.25	43.68	74.00	-30.32	peak
5	10380.000	11.17	37.10	61.44	60.03	46.86	68.20	-21.34	peak
6	15570.000	13.83	41.10	61.24	59.41	53.10	74.00	-20.90	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

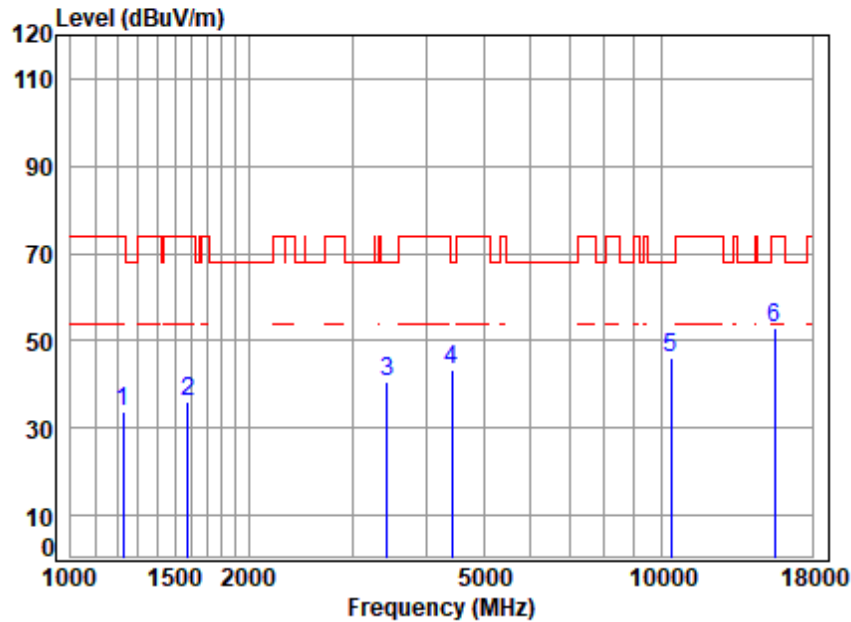


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5190 TX RSE
 Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.39	66.50	33.62	74.00	-40.38	peak
2	1578.822	4.16	26.88	61.51	66.37	35.90	74.00	-38.10	peak
3	3435.590	6.47	31.97	61.54	63.84	40.74	68.20	-27.46	peak
4	4417.841	7.16	34.59	61.19	62.93	43.49	68.20	-24.71	peak
5	10380.000	11.17	37.10	61.44	59.22	46.05	68.20	-22.15	peak
6	p15570.000	13.83	41.10	61.24	59.04	52.73	74.00	-21.27	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

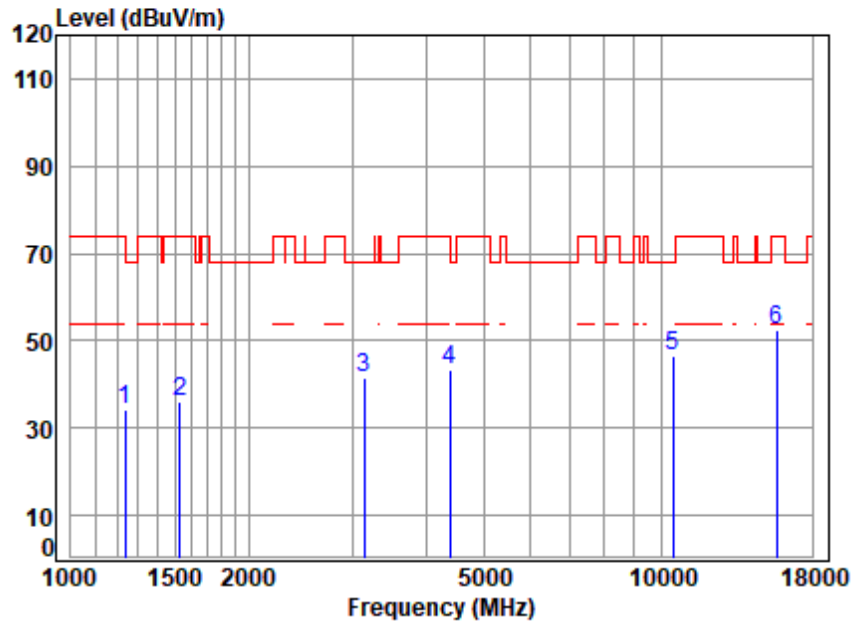

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5230 TX RSE
 Note : 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.40	66.86	34.13	74.00	-39.87	peak
2	1529.414	4.08	26.92	61.50	66.34	35.84	74.00	-38.16	peak
3	3141.145	6.20	32.34	61.63	64.70	41.61	68.20	-26.59	peak
4	4379.699	7.11	34.64	61.21	62.82	43.36	74.00	-30.64	peak
5	10460.000	11.30	37.22	61.44	59.34	46.42	68.20	-21.78	peak
6	15690.000	13.97	41.19	61.22	58.60	52.54	74.00	-21.46	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

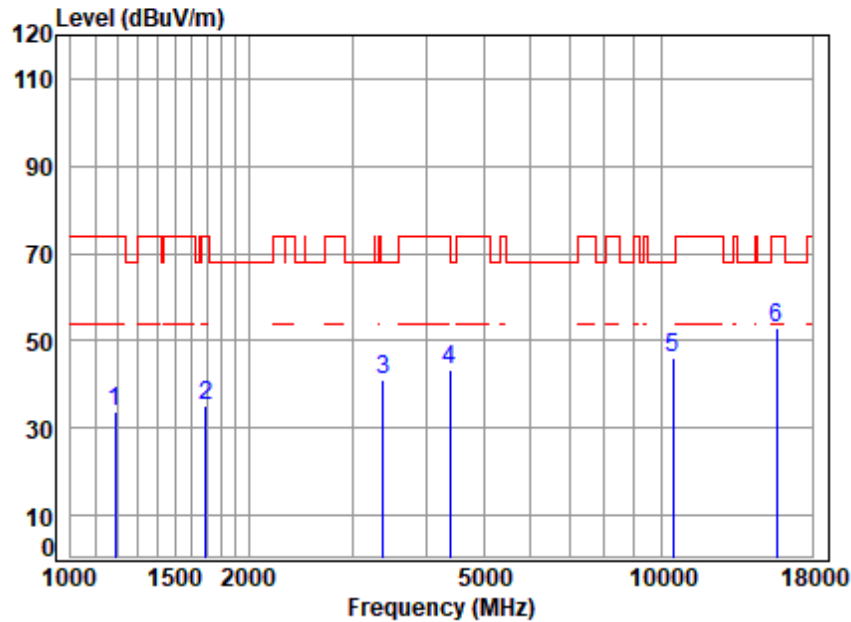


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5230 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.38	67.10	33.68	74.00	-40.32	peak
2	1692.231	4.31	26.22	61.54	66.28	35.27	74.00	-38.73	peak
3	3376.523	6.42	32.26	61.56	63.93	41.05	68.20	-27.15	peak
4	4379.699	7.11	34.64	61.21	62.78	43.32	74.00	-30.68	peak
5	10460.000	11.30	37.22	61.44	59.19	46.27	68.20	-21.93	peak
6	15690.000	13.97	41.19	61.22	58.92	52.86	74.00	-21.14	peak



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

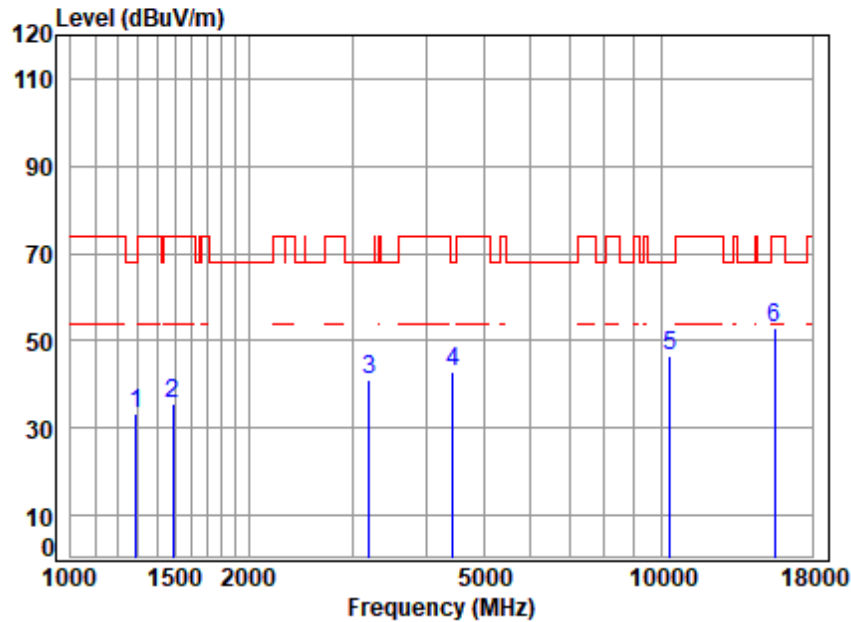


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.22	33.46	68.20	-34.74	peak
2	1490.142	4.03	26.52	61.48	66.31	35.38	74.00	-38.62	peak
3	3196.094	6.25	32.87	61.61	63.63	41.14	68.20	-27.06	peak
4	4430.628	7.17	34.43	61.19	62.63	43.04	68.20	-25.16	peak
5	10360.000	11.14	37.10	61.44	59.82	46.62	68.20	-21.58	peak
6	p15540.000	13.79	41.10	61.25	59.33	52.97	74.00	-21.03	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

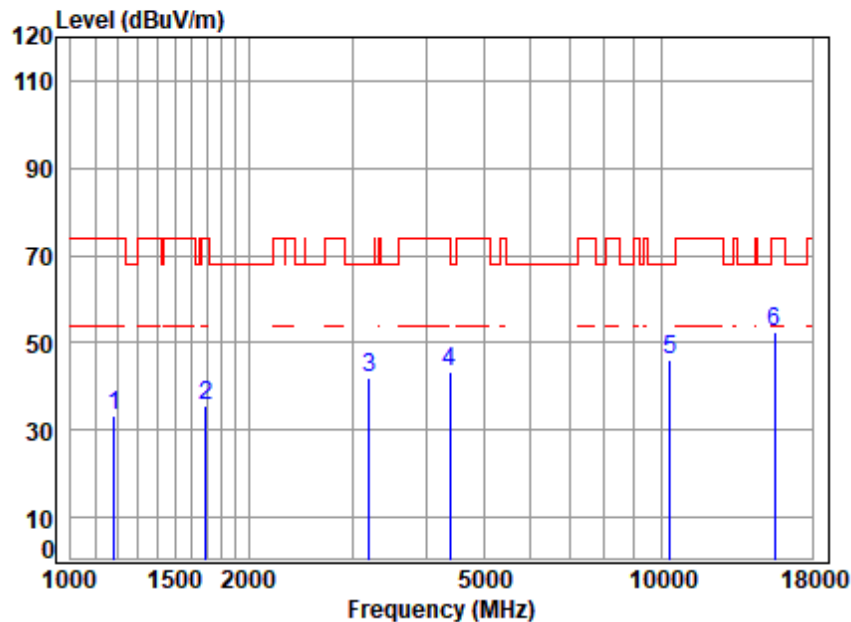


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.38	66.88	33.42	74.00	-40.58	peak
2	1692.231	4.31	26.22	61.54	66.71	35.70	74.00	-38.30	peak
3	3196.094	6.25	32.87	61.61	64.58	42.09	68.20	-26.11	peak
4	4379.699	7.11	34.64	61.21	62.96	43.50	74.00	-30.50	peak
5	10360.000	11.14	37.10	61.44	59.26	46.06	68.20	-22.14	peak
6	p15540.000	13.79	41.10	61.25	58.68	52.32	74.00	-21.68	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

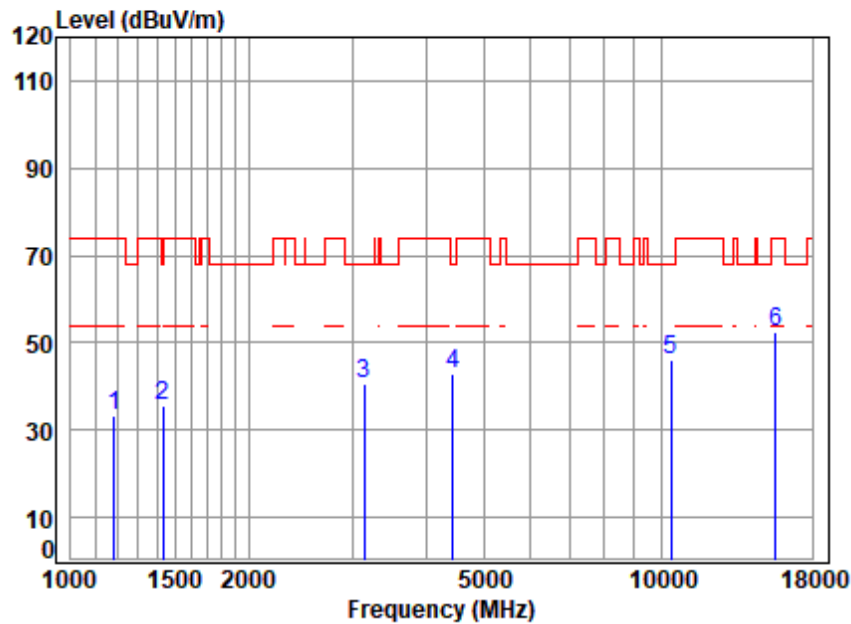


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5200 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1182.513	3.66	24.23	61.38	66.69	33.20	74.00	-40.80	peak
2	1431.047	3.96	25.10	61.47	67.88	35.47	68.20	-32.73	peak
3	3141.145	6.20	32.34	61.63	63.89	40.80	68.20	-27.40	peak
4	4443.453	7.19	34.28	61.18	62.65	42.94	68.20	-25.26	peak
5	10400.000	11.20	37.10	61.44	59.32	46.18	68.20	-22.02	peak
6	p15600.000	13.86	41.10	61.24	58.96	52.68	74.00	-21.32	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

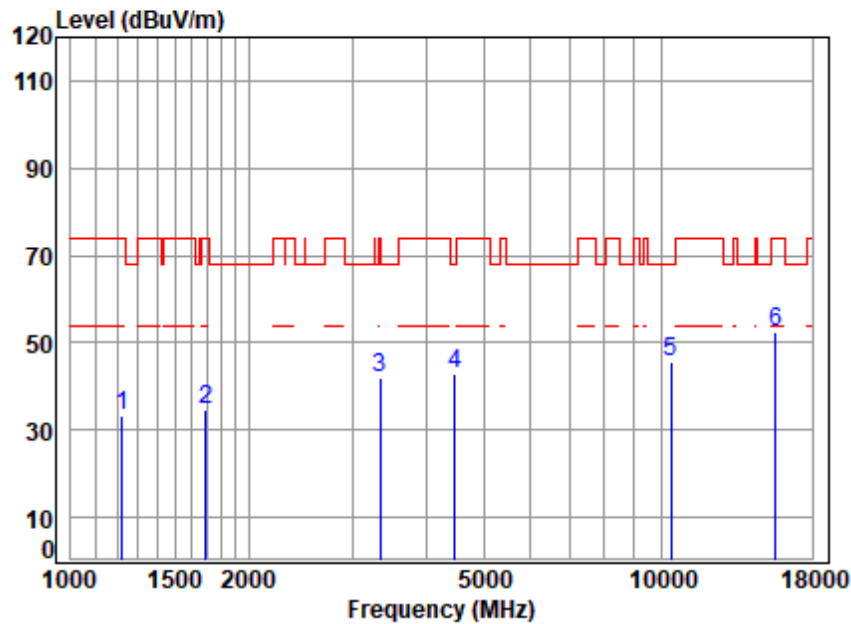


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5200 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1220.714	3.71	24.69	61.39	66.48	33.49	74.00	-40.51	peak
2	1692.231	4.31	26.22	61.54	65.68	34.67	74.00	-39.33	peak
3	3347.371	6.39	32.05	61.57	65.10	41.97	74.00	-32.03	peak
4	4469.214	7.22	33.97	61.17	63.08	43.10	68.20	-25.10	peak
5	10400.000	11.20	37.10	61.44	58.77	45.63	68.20	-22.57	peak
6	p15600.000	13.86	41.10	61.24	58.84	52.56	74.00	-21.44	peak



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: High

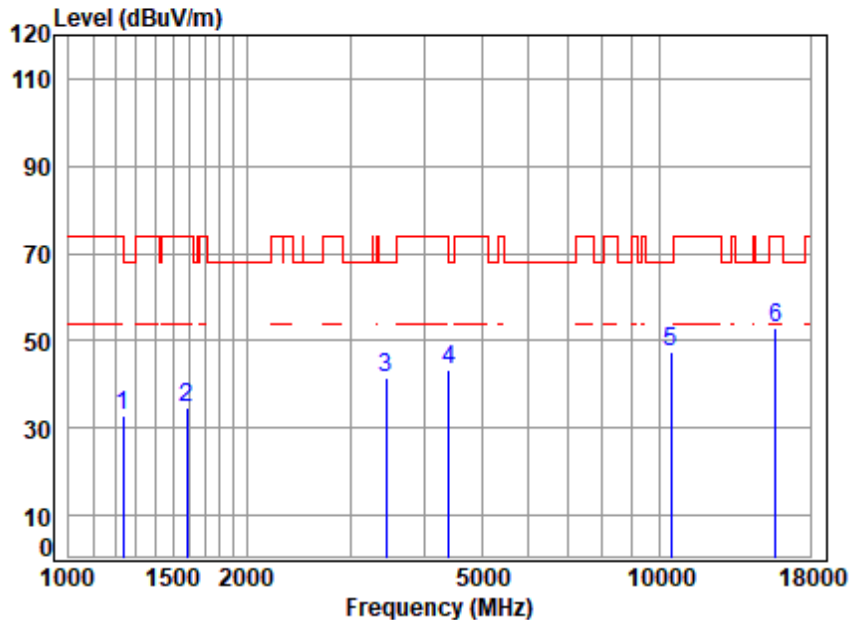


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5240 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.40	65.72	32.99	74.00	-41.01	peak
2	1583.392	4.16	26.87	61.51	65.17	34.69	74.00	-39.31	peak
3	3445.535	6.47	31.85	61.54	64.54	41.32	68.20	-26.88	peak
4	4405.090	7.14	34.74	61.20	62.71	43.39	68.20	-24.81	peak
5	10480.000	11.33	37.26	61.44	60.27	47.42	68.20	-20.78	peak
6	15720.000	14.01	41.22	61.22	59.05	53.06	74.00	-20.94	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

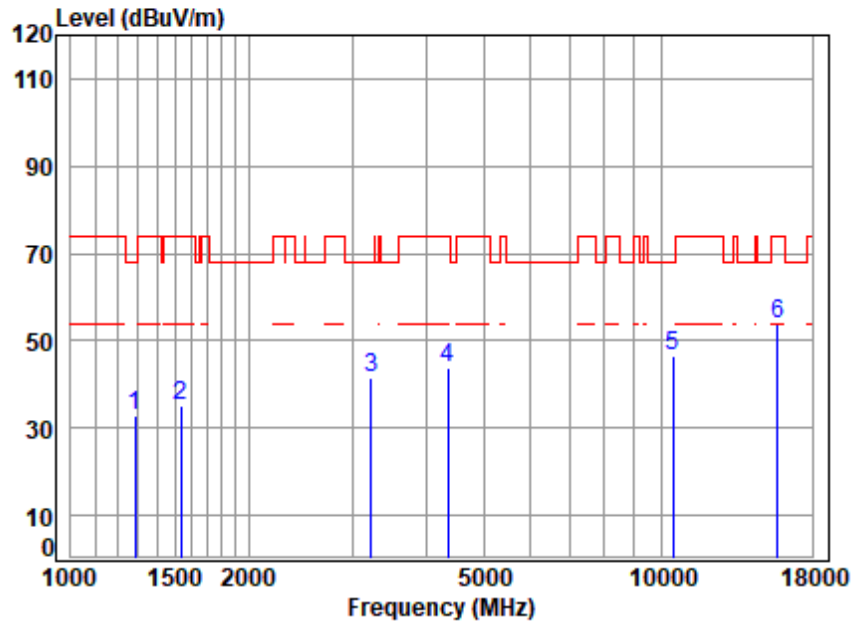


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5240 TX RSE
 Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	65.69	32.94	68.20	-35.26	peak
2	1533.841	4.09	26.94	61.50	65.58	35.11	74.00	-38.89	peak
3	3223.928	6.28	32.52	61.60	64.16	41.36	68.20	-26.84	peak
4	4354.454	7.08	34.44	61.22	63.68	43.98	74.00	-30.02	peak
5	10480.000	11.33	37.26	61.44	59.33	46.48	68.20	-21.72	peak
6	15720.000	14.01	41.22	61.22	59.69	53.70	74.00	-20.30	peak



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

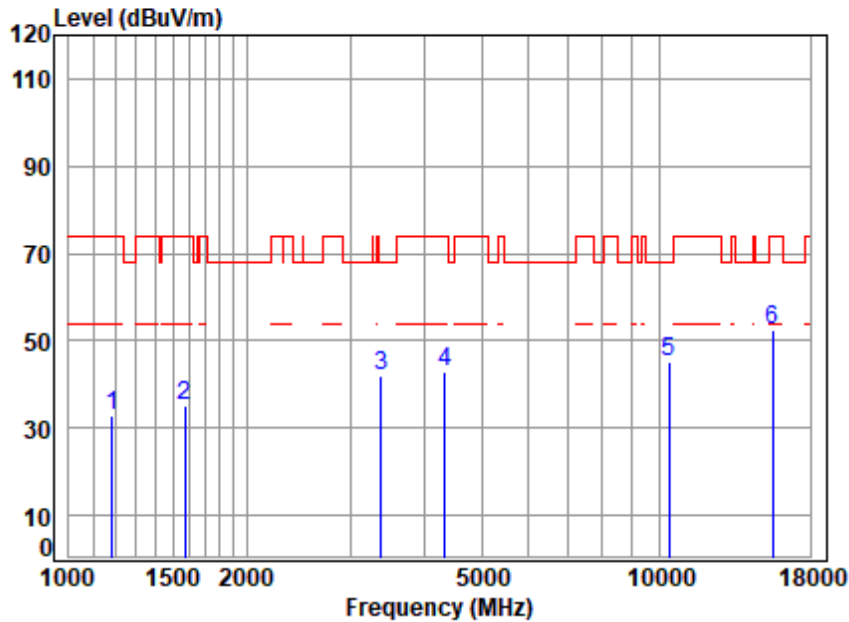


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5190 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1182.513	3.66	24.23	61.38	66.48	32.99	74.00	-41.01	peak
2	1574.265	4.15	26.90	61.51	65.74	35.28	74.00	-38.72	peak
3	3376.523	6.42	32.26	61.56	64.72	41.84	68.20	-26.36	peak
4	4341.886	7.07	34.34	61.22	62.91	43.10	74.00	-30.90	peak
5	10380.000	11.17	37.10	61.44	58.55	45.38	68.20	-22.82	peak
6	p15570.000	13.83	41.10	61.24	58.57	52.26	74.00	-21.74	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

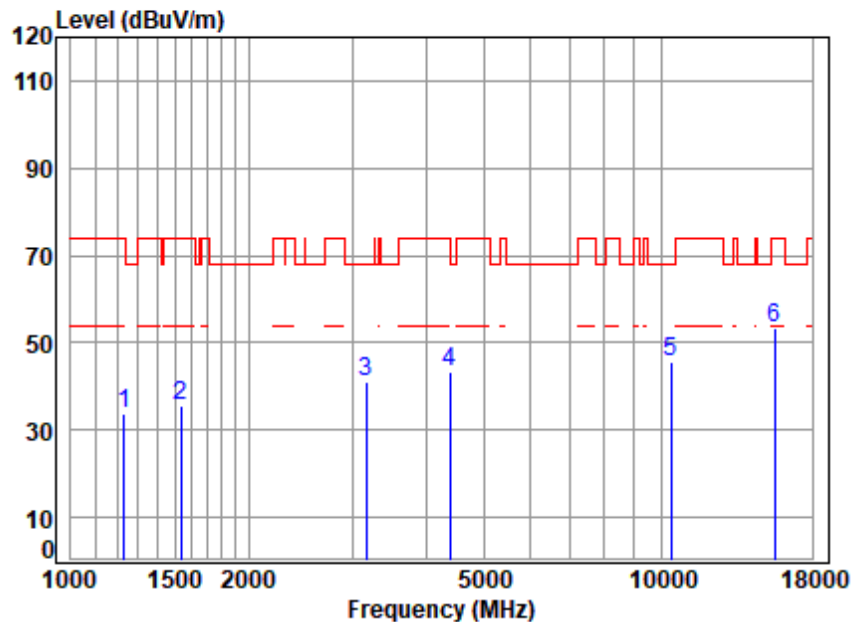

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5190 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.40	66.54	33.70	74.00	-40.30	peak
2	1538.281	4.10	26.95	61.50	66.20	35.75	74.00	-38.25	peak
3	3159.355	6.22	32.57	61.63	63.81	40.97	68.20	-27.23	peak
4	4379.699	7.11	34.64	61.21	62.90	43.44	74.00	-30.56	peak
5	10380.000	11.17	37.10	61.44	58.71	45.54	68.20	-22.66	peak
6	p15570.000	13.83	41.10	61.24	59.57	53.26	74.00	-20.74	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 54 of 715

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: High

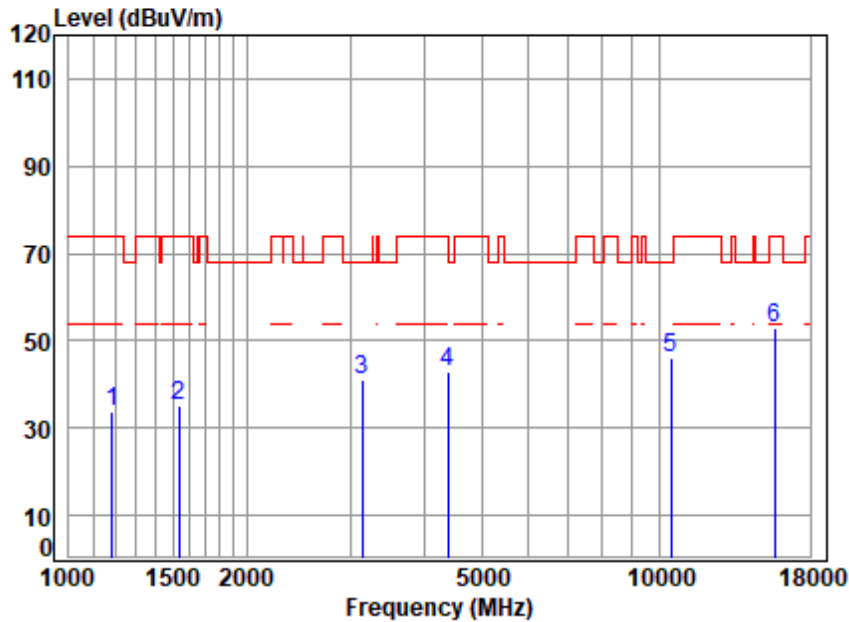

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5230 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1182.513	3.66	24.23	61.38	67.22	33.73	74.00	-40.27	peak
2	1533.841	4.09	26.94	61.50	65.63	35.16	74.00	-38.84	peak
3	3141.145	6.20	32.34	61.63	64.31	41.22	68.20	-26.98	peak
4	4392.376	7.13	34.74	61.20	62.17	42.84	74.00	-31.16	peak
5	10460.000	11.30	37.22	61.44	58.86	45.94	68.20	-22.26	peak
6	p15690.000	13.97	41.19	61.22	58.80	52.74	74.00	-21.26	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

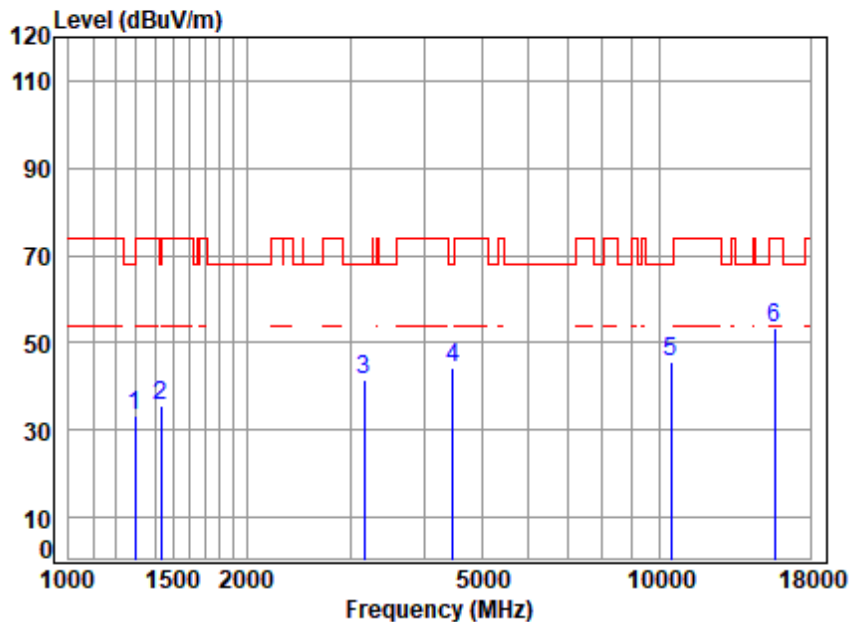

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5230 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	65.93	33.15	68.20	-35.05	peak
2	1431.047	3.96	25.10	61.47	68.10	35.69	68.20	-32.51	peak
3	3168.500	6.23	32.65	61.62	64.08	41.34	68.20	-26.86	peak
4	4469.214	7.22	33.97	61.17	64.02	44.04	68.20	-24.16	peak
5	10460.000	11.30	37.22	61.44	58.55	45.63	68.20	-22.57	peak
6	p15690.000	13.97	41.19	61.22	59.54	53.48	74.00	-20.52	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 56 of 715

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: middle

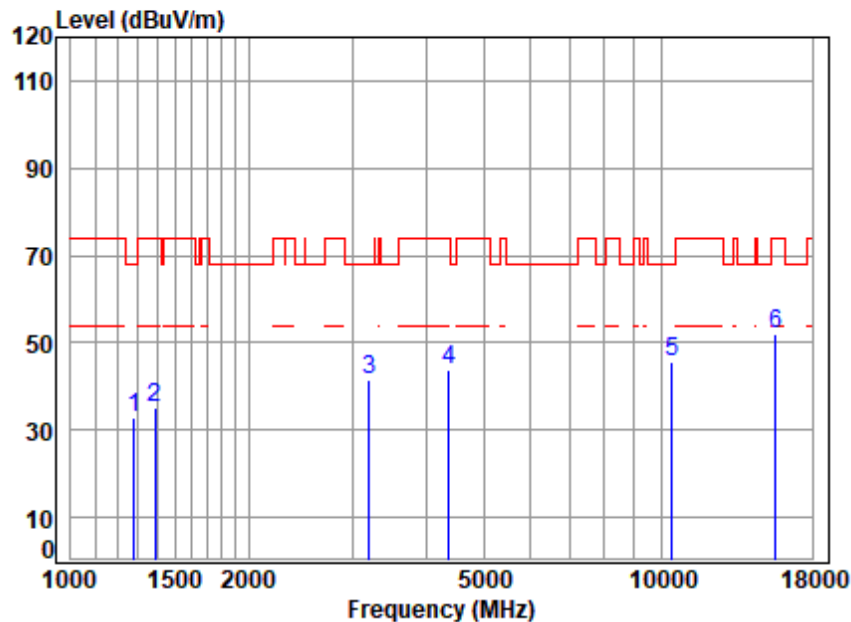

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5210 TX RSE
Note : 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.41	65.58	32.88	68.20	-35.32	peak
2	1390.276	3.92	24.58	61.45	68.10	35.15	74.00	-38.85	peak
3	3196.094	6.25	32.87	61.61	64.12	41.63	68.20	-26.57	peak
4	4367.058	7.10	34.54	61.21	63.59	44.02	74.00	-29.98	peak
5	10420.000	11.23	37.14	61.44	58.71	45.64	68.20	-22.56	peak
6	p15630.000	13.90	41.13	61.23	58.34	52.14	74.00	-21.86	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

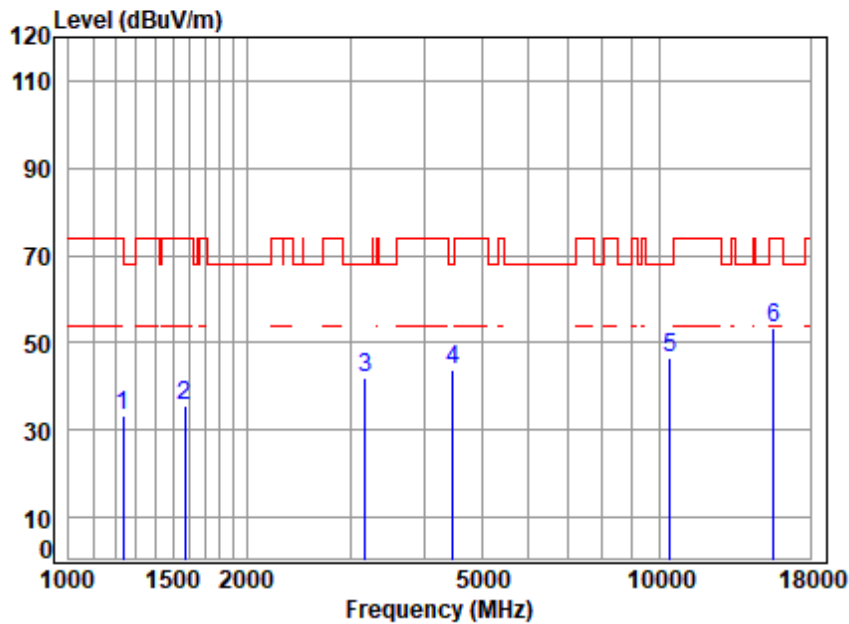


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5210 TX RSE
Note : 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	3.73	24.89	61.40	66.20	33.42	74.00	-40.58	peak
2	1574.265	4.15	26.90	61.51	66.05	35.59	74.00	-38.41	peak
3	3177.672	6.24	32.72	61.62	64.57	41.91	68.20	-26.29	peak
4	4469.214	7.22	33.97	61.17	63.56	43.58	68.20	-24.62	peak
5	10420.000	11.23	37.14	61.44	59.59	46.52	68.20	-21.68	peak
6	p15630.000	13.90	41.13	61.23	59.36	53.16	74.00	-20.84	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

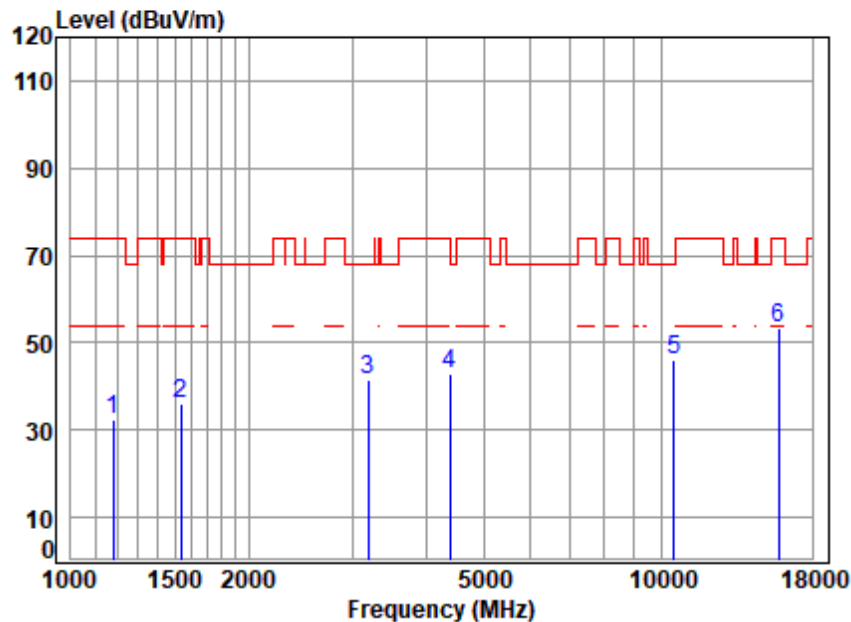


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5260 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1179.100	3.65	24.19	61.38	66.07	32.53	74.00	-41.47	peak
2	1533.841	4.09	26.94	61.50	66.49	36.02	74.00	-37.98	peak
3	3186.869	6.25	32.79	61.62	64.24	41.66	68.20	-26.54	peak
4	4392.376	7.13	34.74	61.20	62.35	43.02	74.00	-30.98	peak
5	10520.000	11.37	37.30	61.43	59.04	46.28	68.20	-21.92	peak
6	15780.000	14.08	41.28	61.21	59.46	53.61	74.00	-20.39	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

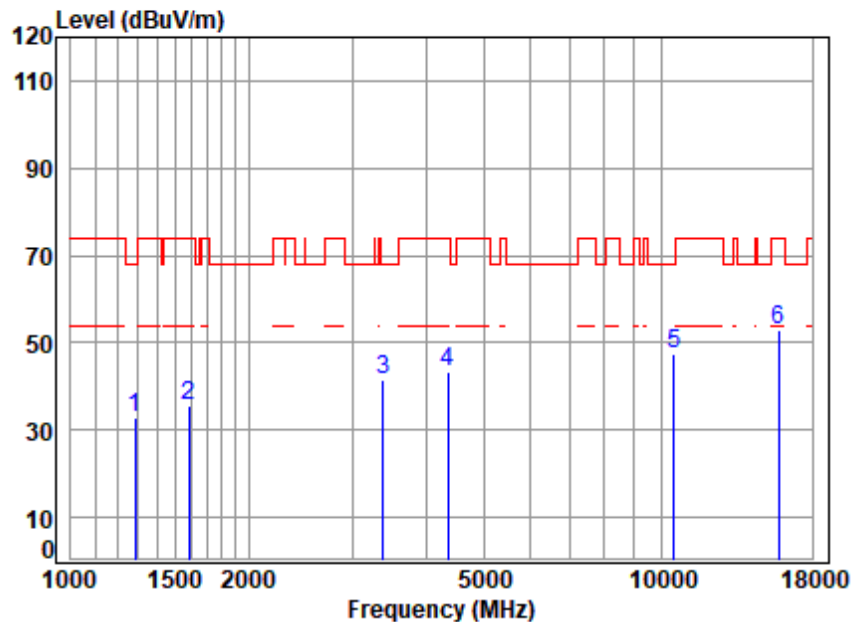


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5260 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	65.65	32.90	68.20	-35.30	peak
2	1583.392	4.16	26.87	61.51	66.01	35.53	74.00	-38.47	peak
3	3386.297	6.42	32.32	61.55	64.18	41.37	68.20	-26.83	peak
4	4354.454	7.08	34.44	61.22	63.06	43.36	74.00	-30.64	peak
5	10520.000	11.37	37.30	61.43	60.15	47.39	68.20	-20.81	peak
6	15780.000	14.08	41.28	61.21	58.72	52.87	74.00	-21.13	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

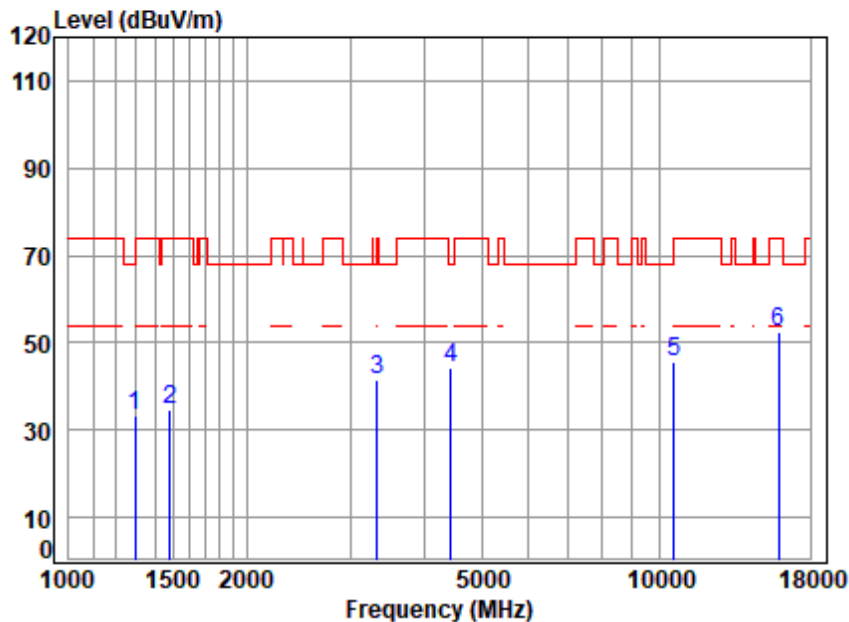


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5300 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	66.12	33.34	68.20	-34.86	peak
2	1485.841	4.02	26.40	61.48	65.70	34.64	74.00	-39.36	peak
3	3328.077	6.37	31.71	61.57	64.94	41.45	68.20	-26.75	peak
4	4443.453	7.19	34.28	61.18	64.01	44.30	68.20	-23.90	peak
5	10600.000	11.43	37.30	61.43	58.27	45.57	68.20	-22.63	peak
6	15900.000	14.23	41.40	61.19	58.05	52.49	74.00	-21.51	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

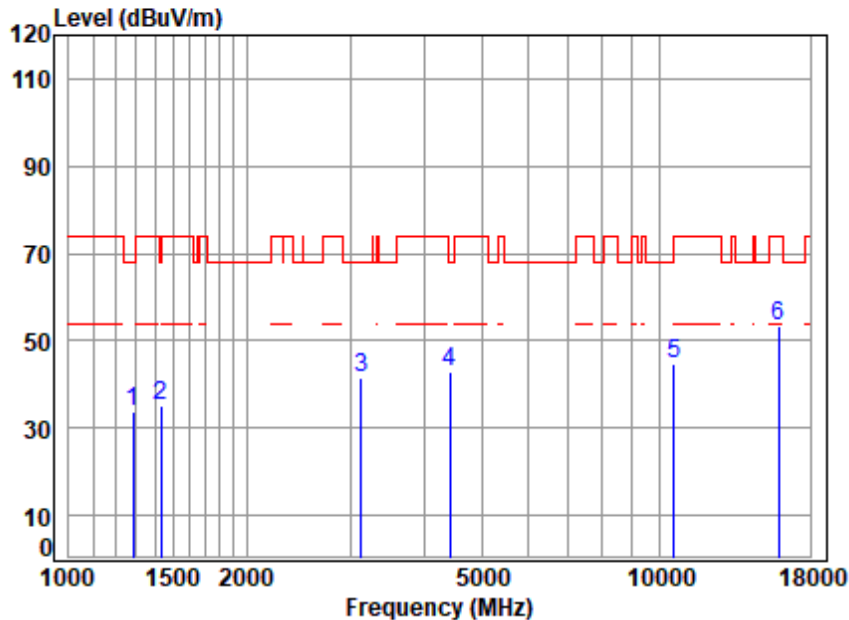


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5300 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	66.49	33.74	68.20	-34.46	peak
2	1431.047	3.96	25.10	61.47	67.64	35.23	68.20	-32.97	peak
3	3132.079	6.20	32.18	61.64	64.98	41.72	68.20	-26.48	peak
4	4417.841	7.16	34.59	61.19	62.52	43.08	68.20	-25.12	peak
5	10600.000	11.43	37.30	61.43	57.54	44.84	68.20	-23.36	peak
6	15900.000	14.23	41.40	61.19	58.92	53.36	74.00	-20.64	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

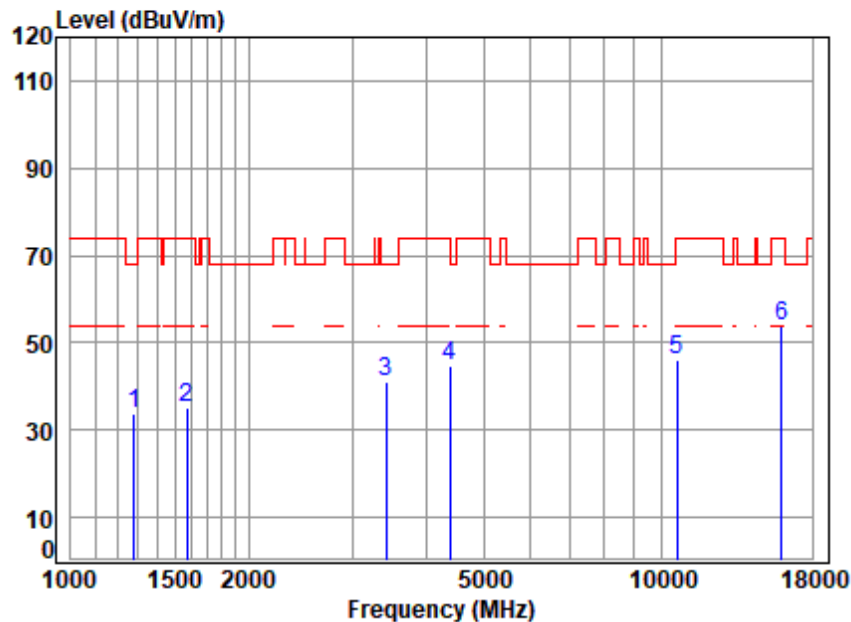


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.41	66.62	33.91	68.20	-34.29	peak
2	1574.265	4.15	26.90	61.51	65.66	35.20	74.00	-38.80	peak
3	3415.787	6.45	32.21	61.54	63.87	40.99	68.20	-27.21	peak
4	4379.699	7.11	34.64	61.21	64.00	44.54	74.00	-29.46	peak
5	10640.000	11.45	37.22	61.43	58.84	46.08	74.00	-27.92	peak
6	15960.000	14.30	41.52	61.19	59.36	53.99	74.00	-20.01	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

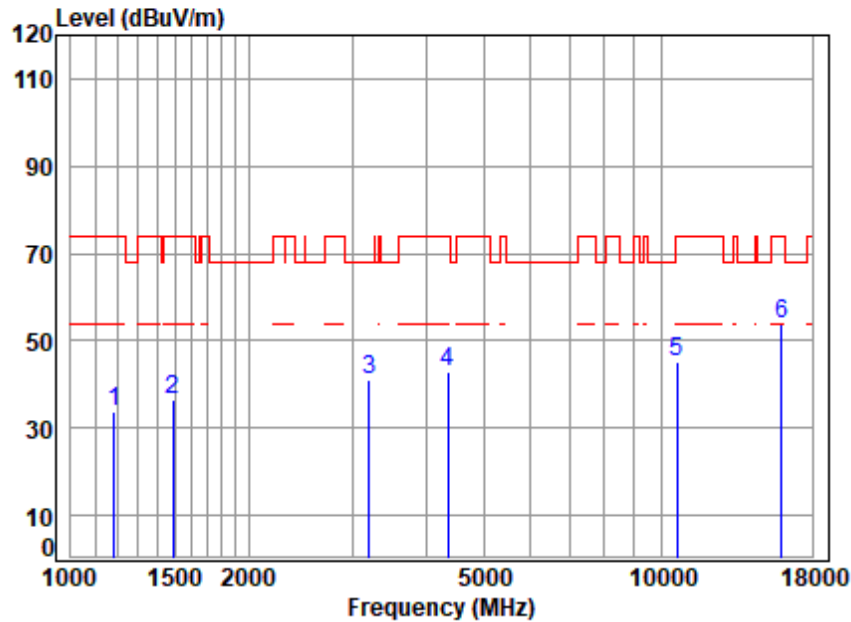


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5320 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.38	67.29	33.83	74.00	-40.17	peak
2	1490.142	4.03	26.52	61.48	67.45	36.52	74.00	-37.48	peak
3	3196.094	6.25	32.87	61.61	63.71	41.22	68.20	-26.98	peak
4	4354.454	7.08	34.44	61.22	62.65	42.95	74.00	-31.05	peak
5	10640.000	11.45	37.22	61.43	57.71	44.95	74.00	-29.05	peak
6	p15960.000	14.30	41.52	61.19	59.30	53.93	74.00	-20.07	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

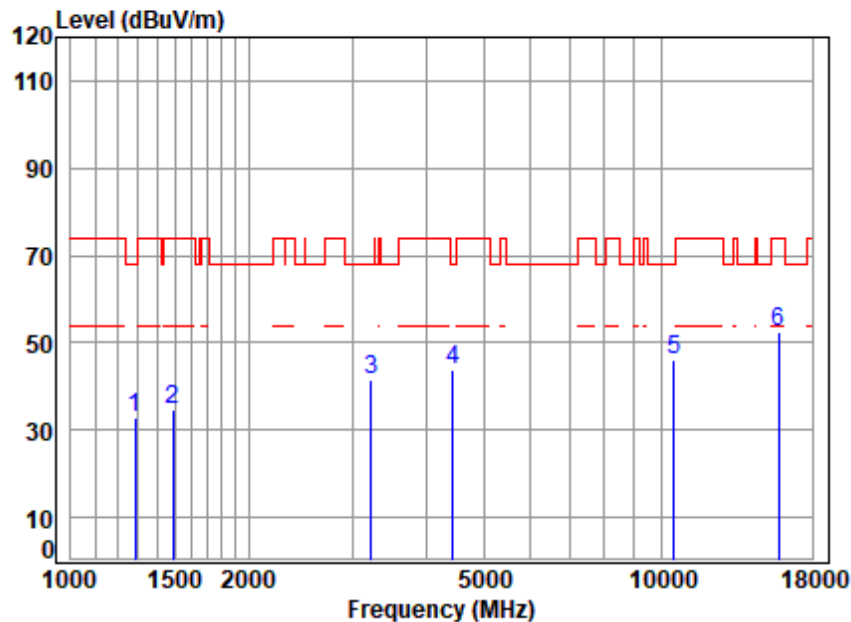


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	65.71	32.96	68.20	-35.24	peak
2	1490.142	4.03	26.52	61.48	65.71	34.78	74.00	-39.22	peak
3	3223.928	6.28	32.52	61.60	64.09	41.29	68.20	-26.91	peak
4	4443.453	7.19	34.28	61.18	63.68	43.97	68.20	-24.23	peak
5	10520.000	11.37	37.30	61.43	58.91	46.15	68.20	-22.05	peak
6	15780.000	14.08	41.28	61.21	58.35	52.50	74.00	-21.50	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

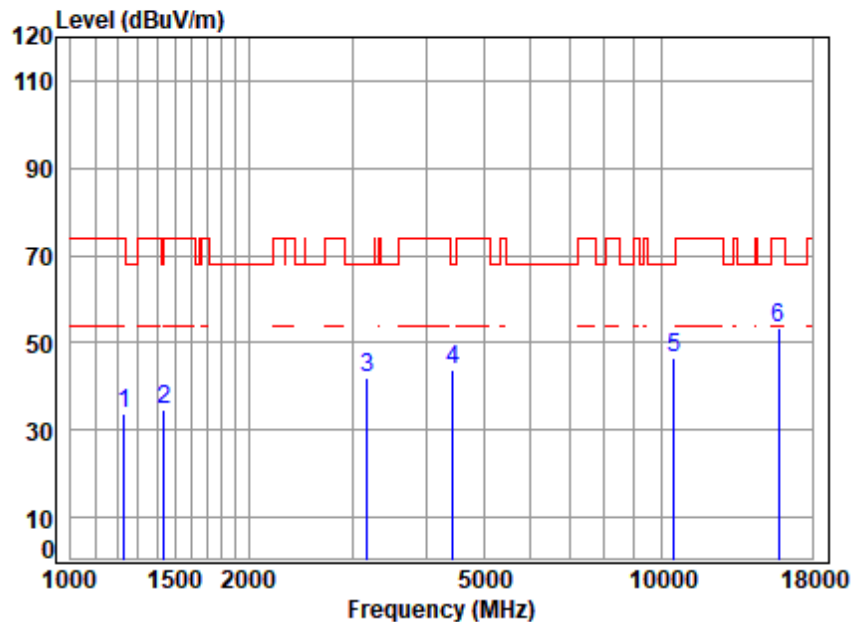


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.40	66.55	33.71	74.00	-40.29	peak
2	1439.343	3.97	25.23	61.47	67.07	34.80	74.00	-39.20	peak
3	3177.672	6.24	32.72	61.62	64.64	41.98	68.20	-26.22	peak
4	4430.628	7.17	34.43	61.19	63.44	43.85	68.20	-24.35	peak
5	10520.000	11.37	37.30	61.43	59.27	46.51	68.20	-21.69	peak
6	15780.000	14.08	41.28	61.21	59.14	53.29	74.00	-20.71	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

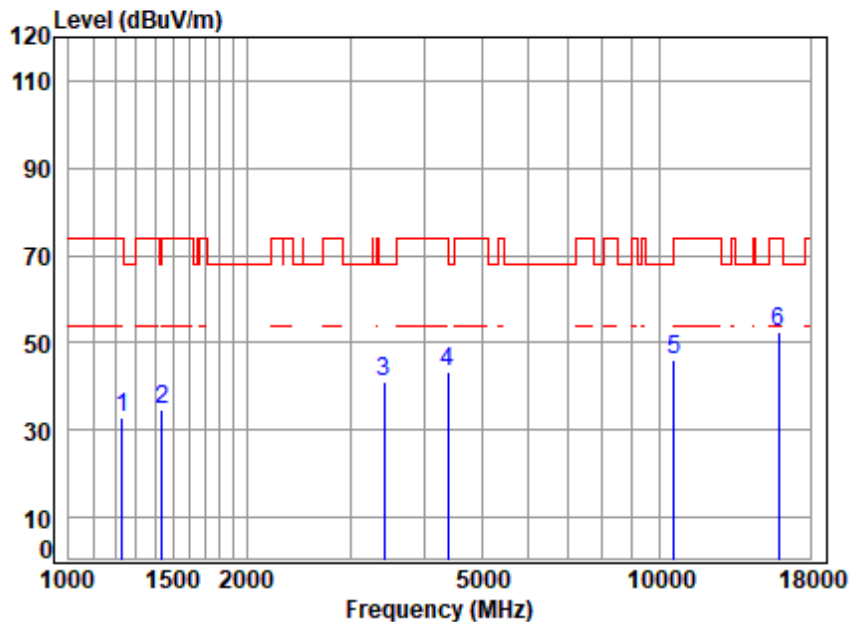


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.40	65.75	32.91	74.00	-41.09	peak
2	1439.343	3.97	25.23	61.47	67.04	34.77	74.00	-39.23	peak
3	3425.675	6.46	32.09	61.54	64.12	41.13	68.20	-27.07	peak
4	4392.376	7.13	34.74	61.20	62.81	43.48	74.00	-30.52	peak
5	10600.000	11.43	37.30	61.43	58.58	45.88	68.20	-22.32	peak
6	p15900.000	14.23	41.40	61.19	57.91	52.35	74.00	-21.65	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

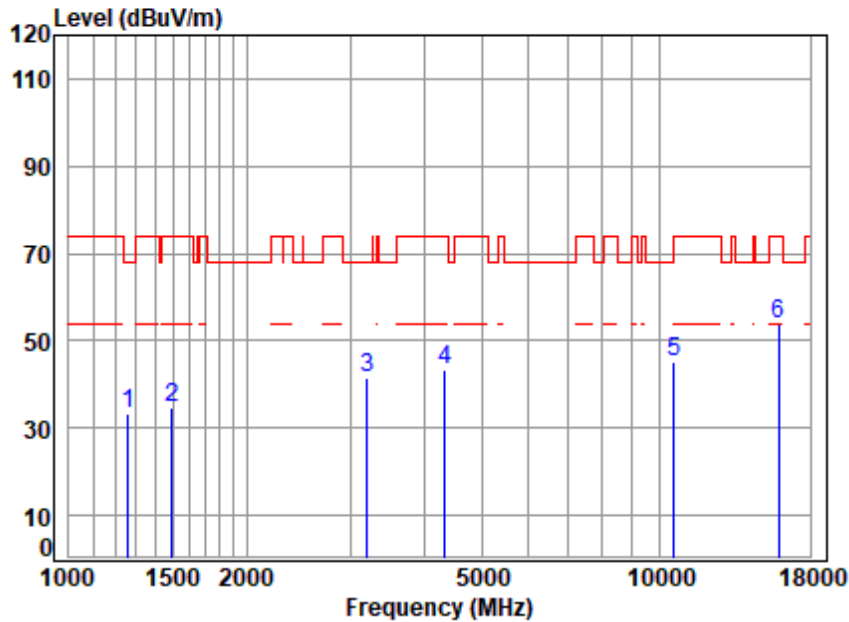


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	61.41	65.94	33.33	68.20	-34.87	peak
2	1494.455	4.03	26.64	61.49	65.59	34.77	74.00	-39.23	peak
3	3196.094	6.25	32.87	61.61	64.09	41.60	68.20	-26.60	peak
4	4329.354	7.05	34.23	61.23	63.29	43.34	74.00	-30.66	peak
5	10600.000	11.43	37.30	61.43	58.03	45.33	68.20	-22.87	peak
6	15900.000	14.23	41.40	61.19	59.36	53.80	74.00	-20.20	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

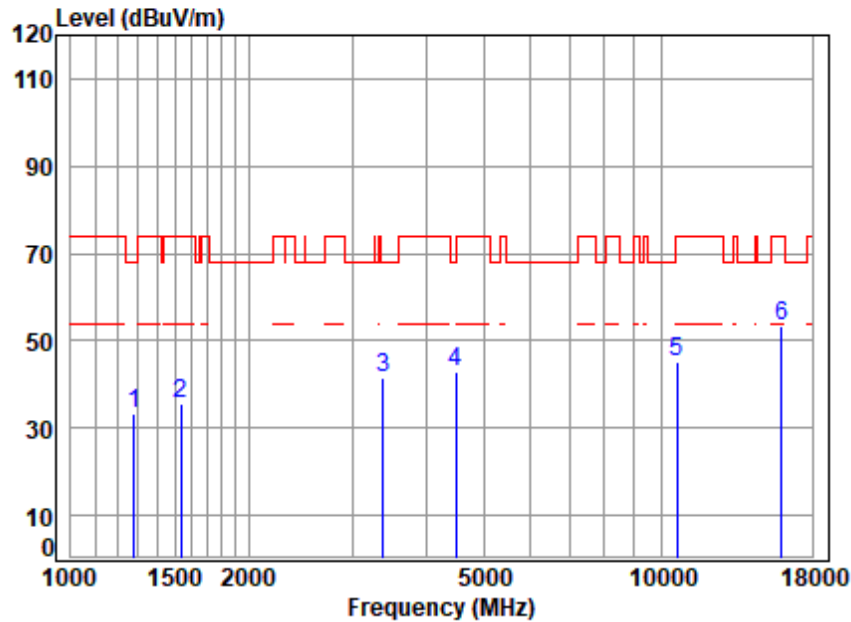


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.41	65.82	33.11	68.20	-35.09	peak
2	1538.281	4.10	26.95	61.50	66.06	35.61	74.00	-38.39	peak
3	3376.523	6.42	32.26	61.56	64.25	41.37	68.20	-26.83	peak
4	4482.150	7.23	33.81	61.16	63.22	43.10	68.20	-25.10	peak
5	10640.000	11.45	37.22	61.43	58.01	45.25	74.00	-28.75	peak
6	15960.000	14.30	41.52	61.19	58.63	53.26	74.00	-20.74	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

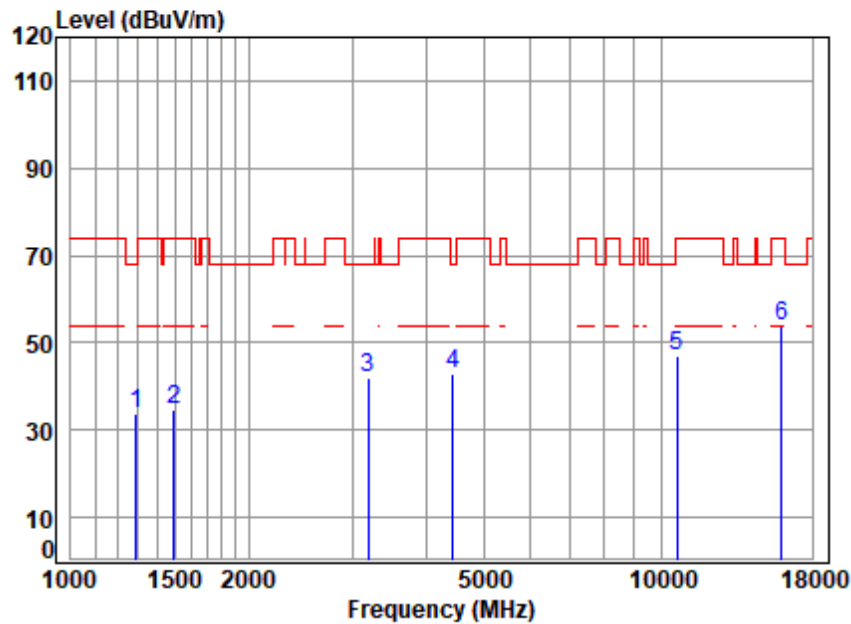


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.57	33.81	68.20	-34.39	peak
2	1494.455	4.03	26.64	61.49	65.59	34.77	74.00	-39.23	peak
3	3186.869	6.25	32.79	61.62	64.38	41.80	68.20	-26.40	peak
4	4443.453	7.19	34.28	61.18	62.42	42.71	68.20	-25.49	peak
5	10640.000	11.45	37.22	61.43	59.96	47.20	74.00	-26.80	peak
6	15960.000	14.30	41.52	61.19	59.27	53.90	74.00	-20.10	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

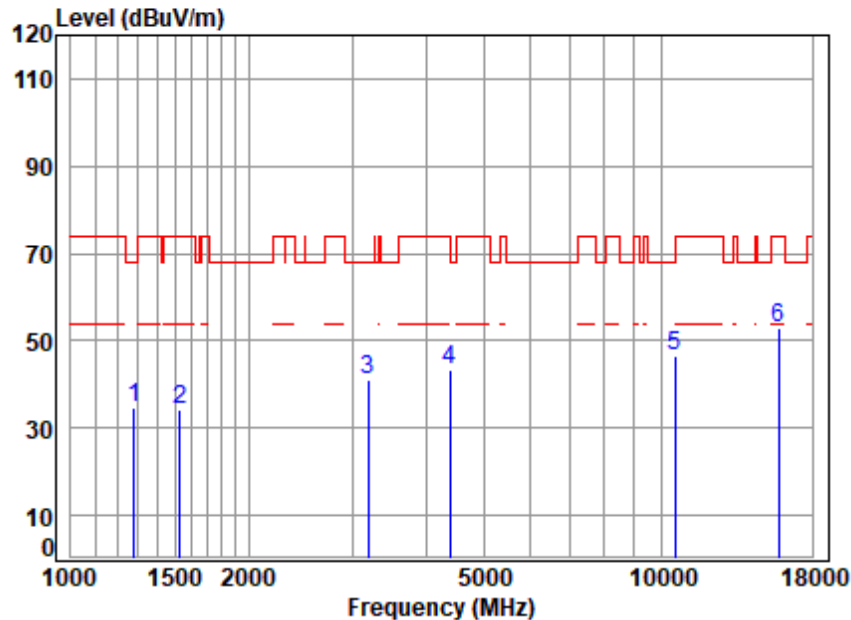


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5270 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.41	67.49	34.79	68.20	-33.41	peak
2	1529.414	4.08	26.92	61.50	64.63	34.13	74.00	-39.87	peak
3	3186.869	6.25	32.79	61.62	63.56	40.98	68.20	-27.22	peak
4	4379.699	7.11	34.64	61.21	62.67	43.21	74.00	-30.79	peak
5	10540.000	11.39	37.30	61.43	59.17	46.43	68.20	-21.77	peak
6	15810.000	14.12	41.31	61.21	58.71	52.93	74.00	-21.07	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

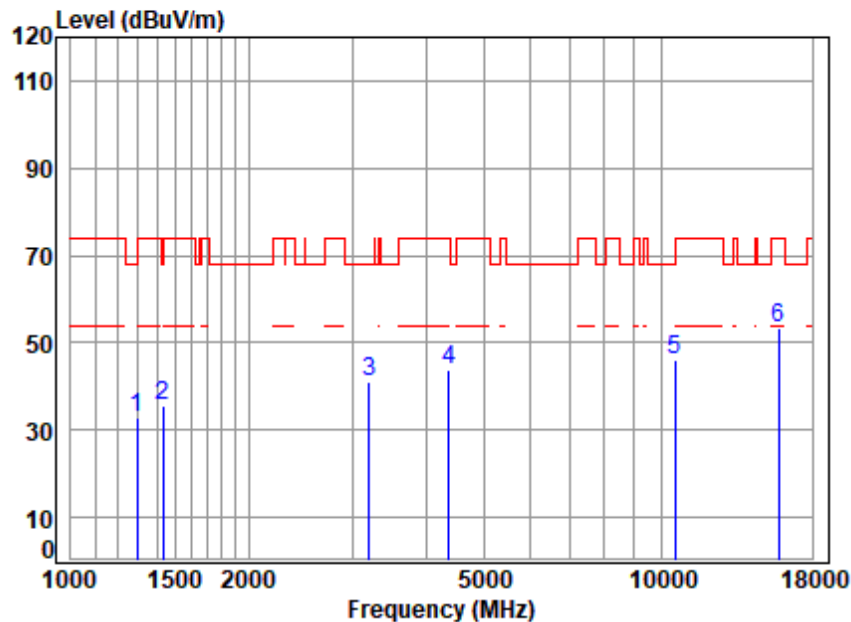


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.81	24.82	61.42	65.84	33.05	68.20	-35.15	peak
2	1435.189	3.97	25.16	61.47	67.96	35.62	74.00	-38.38	peak
3	3196.094	6.25	32.87	61.61	63.49	41.00	68.20	-27.20	peak
4	4367.058	7.10	34.54	61.21	63.57	44.00	74.00	-30.00	peak
5	10540.000	11.39	37.30	61.43	58.91	46.17	68.20	-22.03	peak
6	p15810.000	14.12	41.31	61.21	59.09	53.31	74.00	-20.69	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

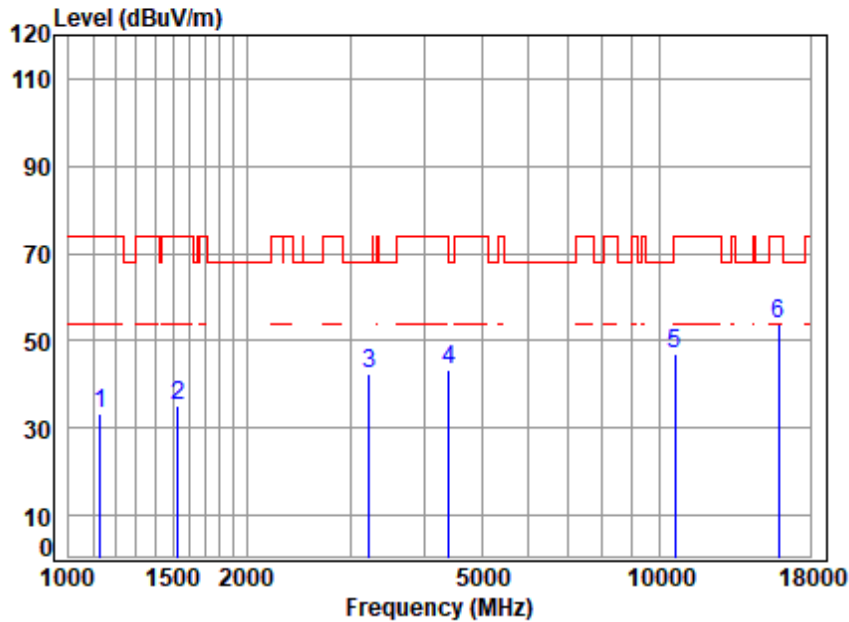


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5310 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1132.340	3.59	23.83	61.36	67.44	33.50	74.00	-40.50	peak
2	1529.414	4.08	26.92	61.50	65.60	35.10	74.00	-38.90	peak
3	3223.928	6.28	32.52	61.60	65.03	42.23	68.20	-25.97	peak
4	4405.090	7.14	34.74	61.20	62.56	43.24	68.20	-24.96	peak
5	10620.000	11.44	37.26	61.43	59.72	46.99	74.00	-27.01	peak
6	p15930.000	14.27	41.46	61.19	59.38	53.92	74.00	-20.08	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

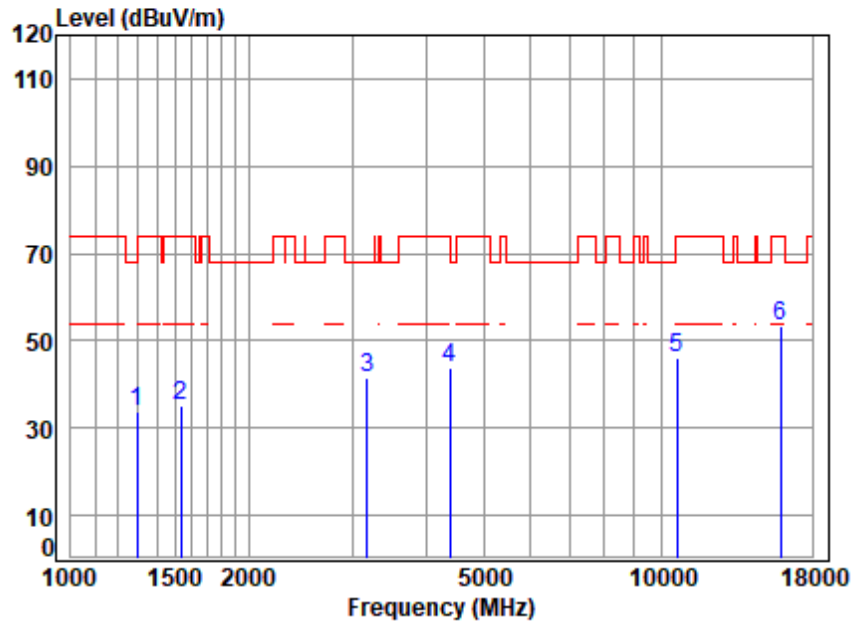


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	66.39	33.61	68.20	-34.59	peak
2	1538.281	4.10	26.95	61.50	65.57	35.12	74.00	-38.88	peak
3	3177.672	6.24	32.72	61.62	64.05	41.39	68.20	-26.81	peak
4	4392.376	7.13	34.74	61.20	62.95	43.62	74.00	-30.38	peak
5	10620.000	11.44	37.26	61.43	58.96	46.23	74.00	-27.77	peak
6	p15930.000	14.27	41.46	61.19	58.95	53.49	74.00	-20.51	peak



Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

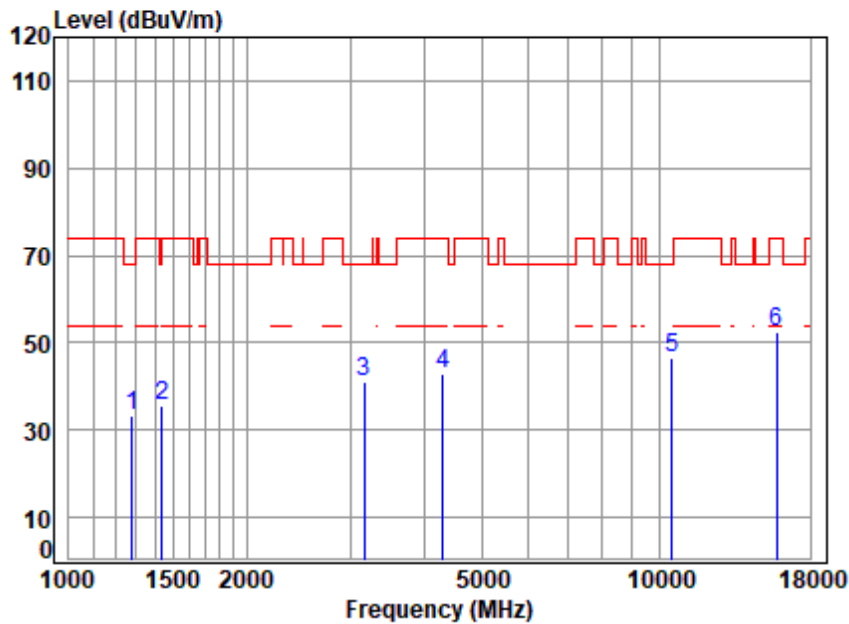


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5260 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.41	66.14	33.44	68.20	-34.76	peak
2	1439.343	3.97	25.23	61.47	67.95	35.68	74.00	-38.32	peak
3	3159.355	6.22	32.57	61.63	64.12	41.28	68.20	-26.92	peak
4	4304.400	7.02	34.04	61.24	63.28	43.10	74.00	-30.90	peak
5	10520.000	11.37	37.30	61.43	59.48	46.72	68.20	-21.48	peak
6	15780.000	14.08	41.28	61.21	58.35	52.50	74.00	-21.50	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

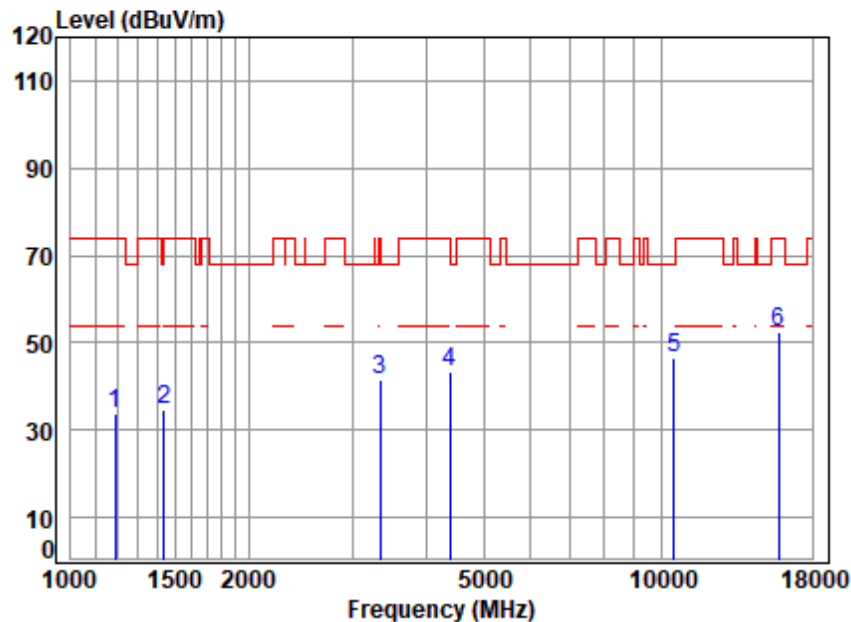

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5260 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.38	67.18	33.76	74.00	-40.24	peak
2	1439.343	3.97	25.23	61.47	66.99	34.72	74.00	-39.28	peak
3	3337.710	6.38	31.88	61.57	64.75	41.44	74.00	-32.56	peak
4	4392.376	7.13	34.74	61.20	62.57	43.24	74.00	-30.76	peak
5	10520.000	11.37	37.30	61.43	59.31	46.55	68.20	-21.65	peak
6	15780.000	14.08	41.28	61.21	58.10	52.25	74.00	-21.75	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 76 of 715

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: middle

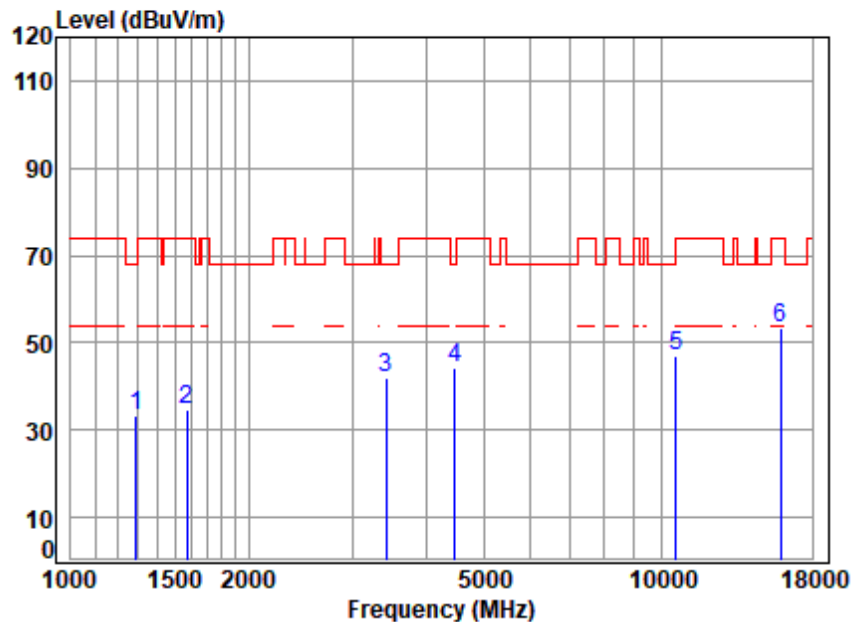

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5300 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.22	33.46	68.20	-34.74	peak
2	1574.265	4.15	26.90	61.51	65.09	34.63	74.00	-39.37	peak
3	3415.787	6.45	32.21	61.54	64.94	42.06	68.20	-26.14	peak
4	4469.214	7.22	33.97	61.17	64.06	44.08	68.20	-24.12	peak
5	10600.000	11.43	37.30	61.43	59.52	46.82	68.20	-21.38	peak
6	p15900.000	14.23	41.40	61.19	58.99	53.43	74.00	-20.57	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 77 of 715

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

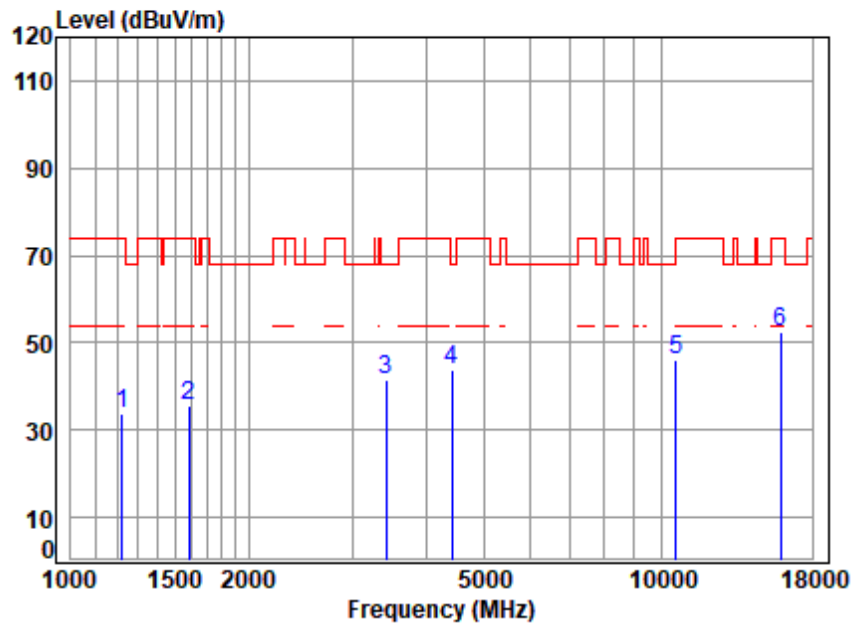

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5300 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1224.247	3.71	24.74	61.39	66.53	33.59	74.00	-40.41	peak
2	1583.392	4.16	26.87	61.51	66.00	35.52	74.00	-38.48	peak
3	3425.675	6.46	32.09	61.54	64.30	41.31	68.20	-26.89	peak
4	4417.841	7.16	34.59	61.19	63.03	43.59	68.20	-24.61	peak
5	10600.000	11.43	37.30	61.43	58.86	46.16	68.20	-22.04	peak
6	p15900.000	14.23	41.40	61.19	58.11	52.55	74.00	-21.45	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 78 of 715

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

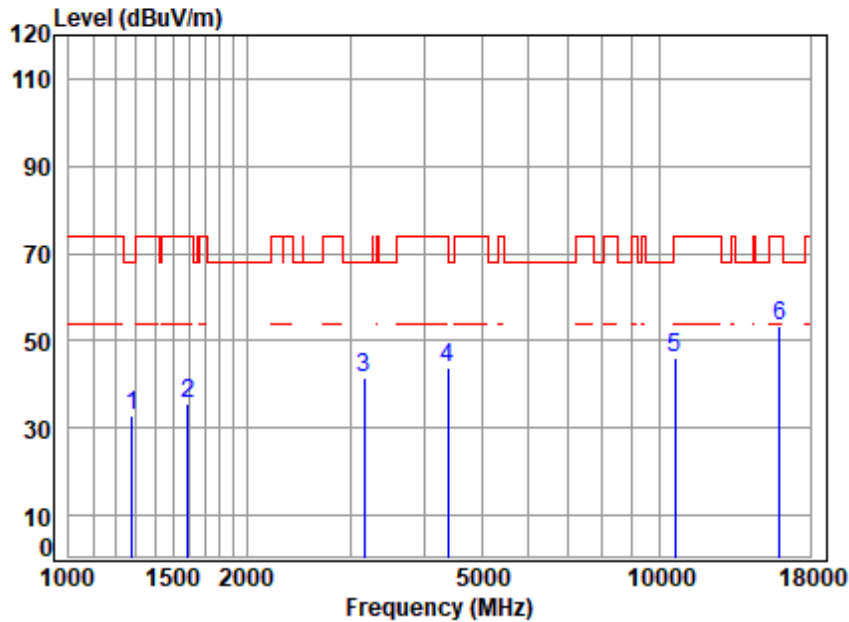

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5320 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.41	65.71	33.01	68.20	-35.19	peak
2	1592.571	4.18	26.83	61.51	66.09	35.59	74.00	-38.41	peak
3	3159.355	6.22	32.57	61.63	64.20	41.36	68.20	-26.84	peak
4	4379.699	7.11	34.64	61.21	63.45	43.99	74.00	-30.01	peak
5	10640.000	11.45	37.22	61.43	58.76	46.00	74.00	-28.00	peak
6	p15960.000	14.30	41.52	61.19	58.73	53.36	74.00	-20.64	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

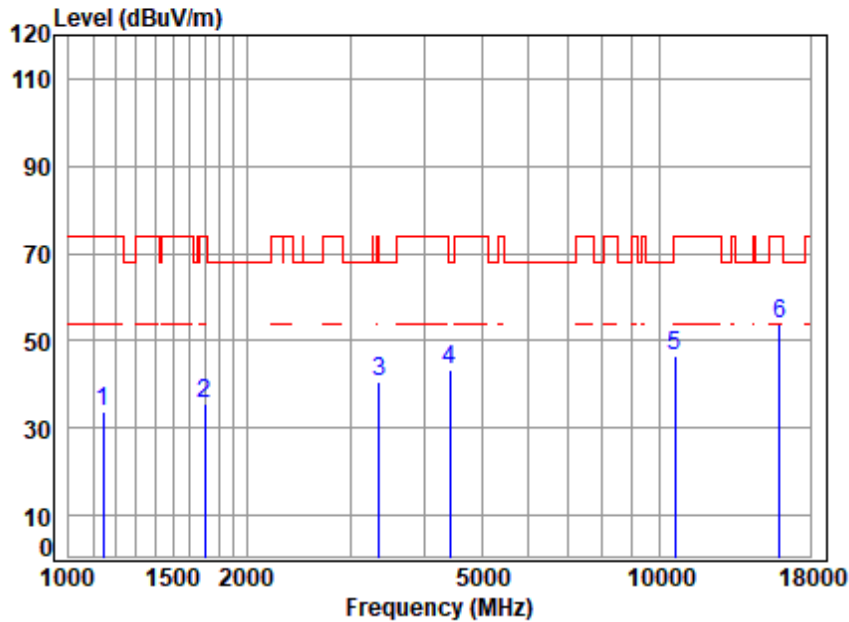


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5320 TX RSE
 Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1142.201	3.60	23.87	61.36	67.47	33.58	74.00	-40.42	peak
2	1697.129	4.32	26.21	61.54	66.46	35.45	74.00	-38.55	peak
3	3357.061	6.40	32.14	61.56	63.64	40.62	74.00	-33.38	peak
4	4417.841	7.16	34.59	61.19	62.91	43.47	68.20	-24.73	peak
5	10640.000	11.45	37.22	61.43	59.15	46.39	74.00	-27.61	peak
6	p15960.000	14.30	41.52	61.19	59.08	53.71	74.00	-20.29	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

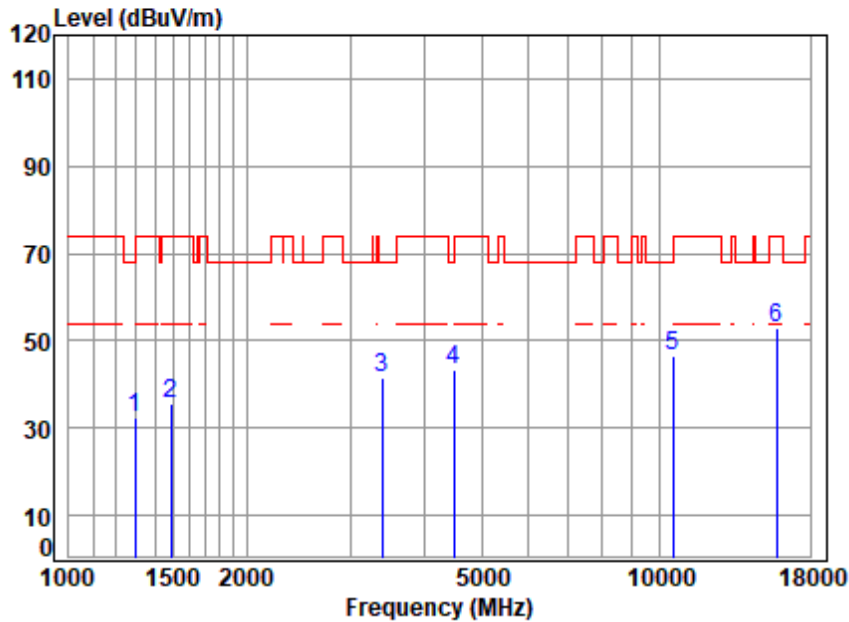


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5270 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	65.37	32.59	68.20	-35.61	peak
2	1490.142	4.03	26.52	61.48	66.45	35.52	74.00	-38.48	peak
3	3396.098	6.43	32.38	61.55	64.15	41.41	68.20	-26.79	peak
4	4495.125	7.24	33.66	61.16	63.57	43.31	68.20	-24.89	peak
5	10540.000	11.39	37.30	61.43	59.49	46.75	68.20	-21.45	peak
6	p15810.000	14.12	41.31	61.21	58.91	53.13	74.00	-20.87	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

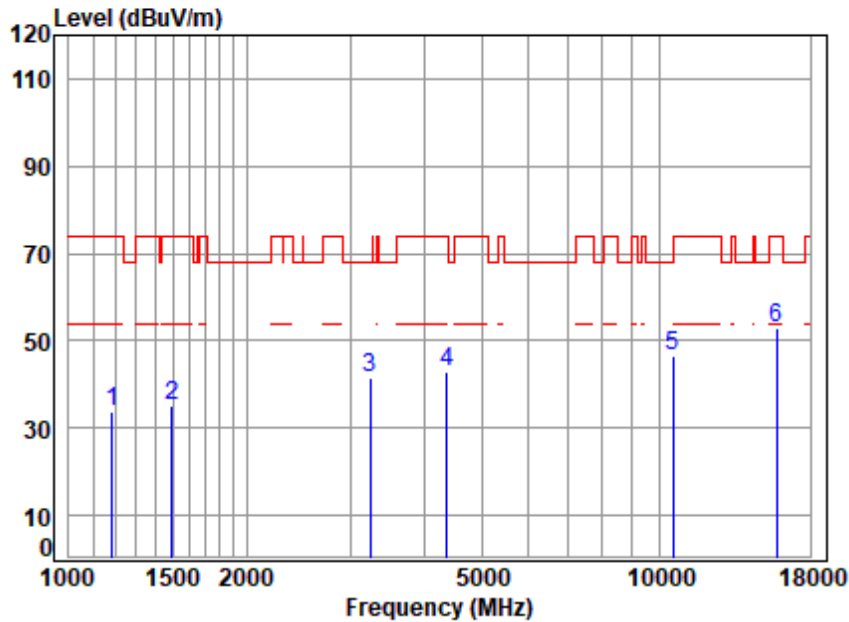

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5270 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1182.513	3.66	24.23	61.38	67.14	33.65	74.00	-40.35	peak
2	1494.455	4.03	26.64	61.49	65.86	35.04	74.00	-38.96	peak
3	3233.260	6.29	32.37	61.60	64.27	41.33	68.20	-26.87	peak
4	4367.058	7.10	34.54	61.21	62.64	43.07	74.00	-30.93	peak
5	10540.000	11.39	37.30	61.43	59.16	46.42	68.20	-21.78	peak
6	15810.000	14.12	41.31	61.21	58.55	52.77	74.00	-21.23	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 82 of 715

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

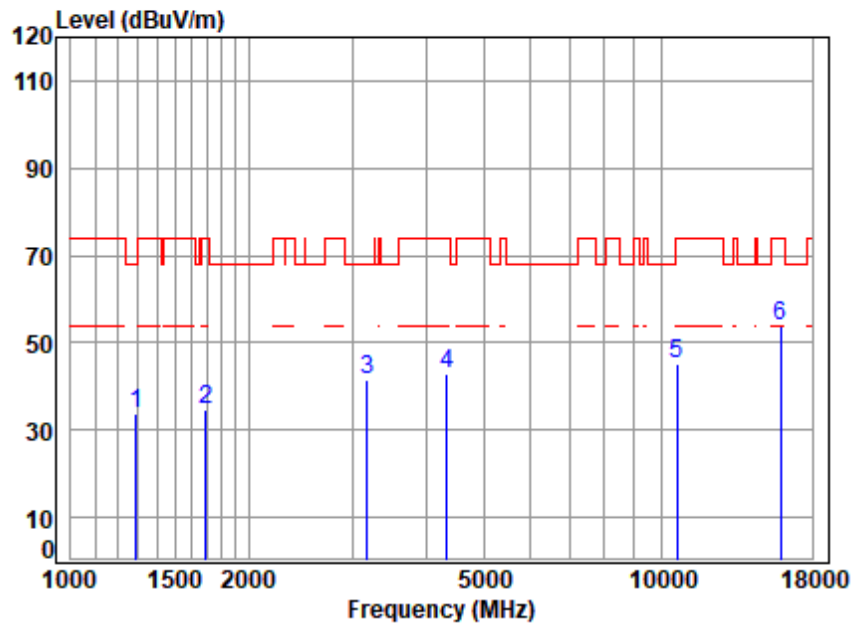

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5310 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.65	33.89	68.20	-34.31	peak
2	1692.231	4.31	26.22	61.54	65.66	34.65	74.00	-39.35	peak
3	3177.672	6.24	32.72	61.62	64.04	41.38	68.20	-26.82	peak
4	4329.354	7.05	34.23	61.23	62.82	42.87	74.00	-31.13	peak
5	10620.000	11.44	37.26	61.43	58.06	45.33	74.00	-28.67	peak
6	15930.000	14.27	41.46	61.19	59.19	53.73	74.00	-20.27	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

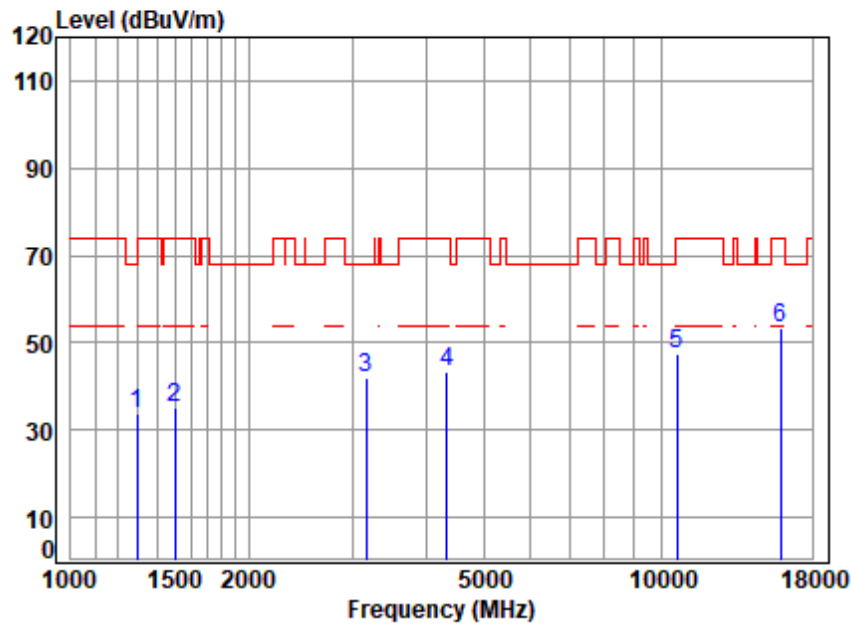

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5310 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.81	24.82	61.42	66.54	33.75	68.20	-34.45	peak
2	1498.781	4.04	26.77	61.49	65.86	35.18	74.00	-38.82	peak
3	3168.500	6.23	32.65	61.62	64.57	41.83	68.20	-26.37	peak
4	4341.886	7.07	34.34	61.22	63.34	43.53	74.00	-30.47	peak
5	10620.000	11.44	37.26	61.43	60.41	47.68	74.00	-26.32	peak
6	p15930.000	14.27	41.46	61.19	58.96	53.50	74.00	-20.50	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 84 of 715

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

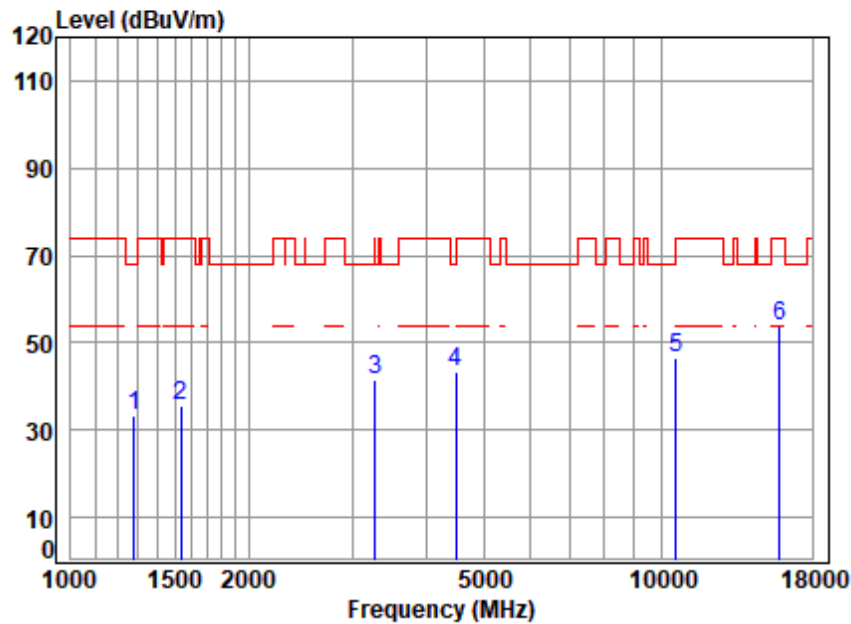

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5290 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.41	66.12	33.42	68.20	-34.78	peak
2	1533.841	4.09	26.94	61.50	66.04	35.57	74.00	-38.43	peak
3	3280.326	6.33	31.55	61.59	65.35	41.64	68.20	-26.56	peak
4	4482.150	7.23	33.81	61.16	63.40	43.28	68.20	-24.92	peak
5	10580.000	11.41	37.30	61.43	59.11	46.39	68.20	-21.81	peak
6	p15870.000	14.19	41.37	61.20	59.52	53.88	74.00	-20.12	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 85 of 715

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

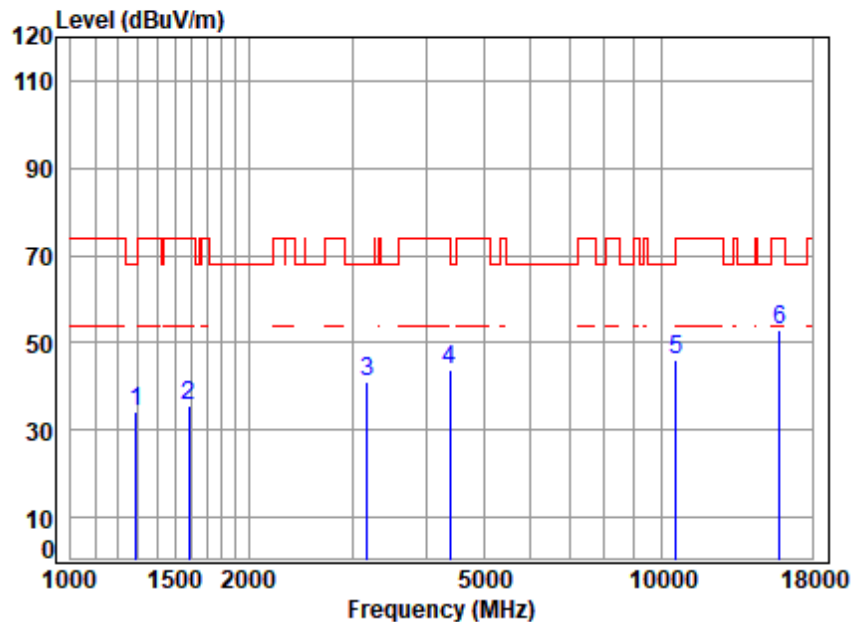

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5290 TX RSE
Note : 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.78	34.02	68.20	-34.18	peak
2	1583.392	4.16	26.87	61.51	65.93	35.45	74.00	-38.55	peak
3	3177.672	6.24	32.72	61.62	63.66	41.00	68.20	-27.20	peak
4	4392.376	7.13	34.74	61.20	63.04	43.71	74.00	-30.29	peak
5	10580.000	11.41	37.30	61.43	58.93	46.21	68.20	-21.99	peak
6	p15870.000	14.19	41.37	61.20	58.67	53.03	74.00	-20.97	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

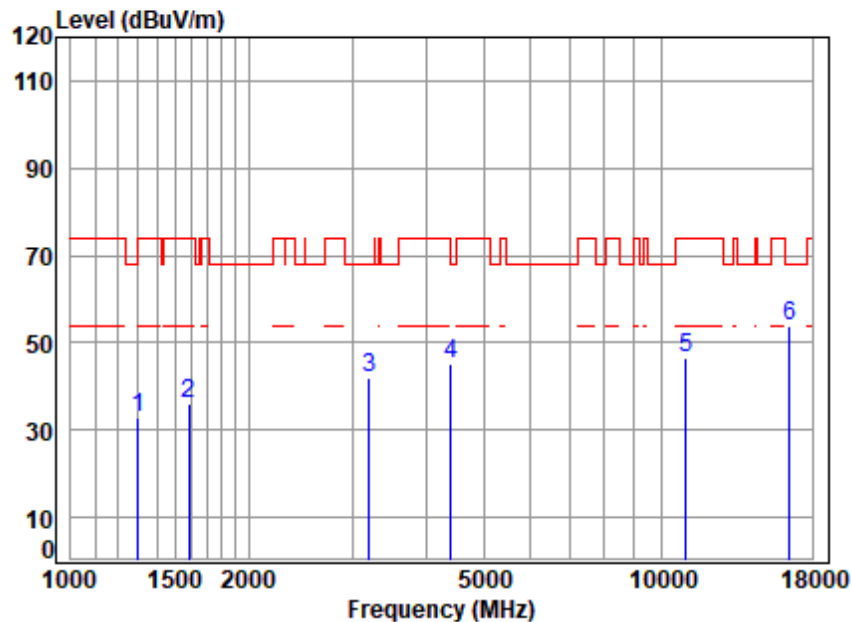


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	3.81	24.79	61.42	65.78	32.96	74.00	-41.04	peak
2	1587.975	4.17	26.85	61.51	66.46	35.97	74.00	-38.03	peak
3	3205.345	6.26	32.81	61.61	64.65	42.11	68.20	-26.09	peak
4	4405.090	7.14	34.74	61.20	64.48	45.16	68.20	-23.04	peak
5	11000.000	11.68	37.50	61.41	58.75	46.52	74.00	-27.48	peak
6	p16500.000	13.99	42.10	60.89	58.57	53.77	68.20	-14.43	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

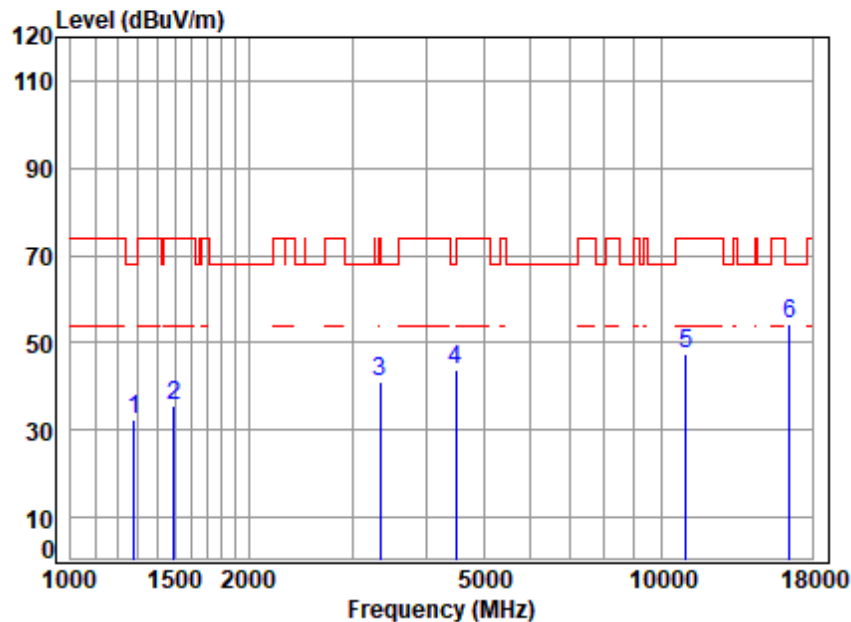


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.41	65.32	32.62	68.20	-35.58	peak
2	1494.455	4.03	26.64	61.49	66.27	35.45	74.00	-38.55	peak
3	3347.371	6.39	32.05	61.57	64.30	41.17	74.00	-32.83	peak
4	4482.150	7.23	33.81	61.16	63.85	43.73	68.20	-24.47	peak
5	11000.000	11.68	37.50	61.41	59.49	47.26	74.00	-26.74	peak
6	p16500.000	13.99	42.10	60.89	58.88	54.08	68.20	-14.12	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

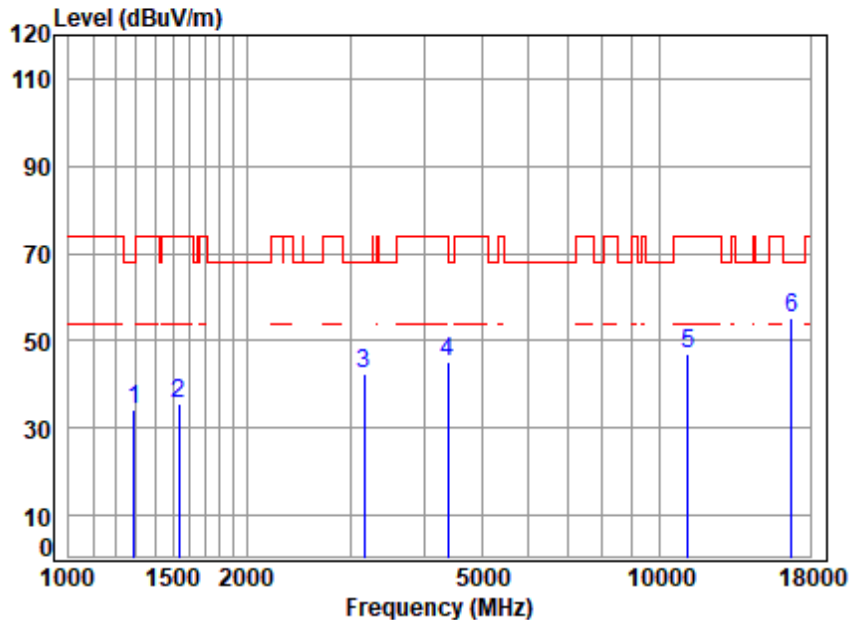


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5580 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.79	34.03	68.20	-34.17	peak
2	1533.841	4.09	26.94	61.50	66.10	35.63	74.00	-38.37	peak
3	3168.500	6.23	32.65	61.62	64.97	42.23	68.20	-25.97	peak
4	4379.699	7.11	34.64	61.21	64.41	44.95	74.00	-29.05	peak
5	11160.000	11.77	37.62	61.41	59.24	47.22	74.00	-26.78	peak
6	p16740.000	14.15	42.78	60.76	59.04	55.21	68.20	-12.99	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

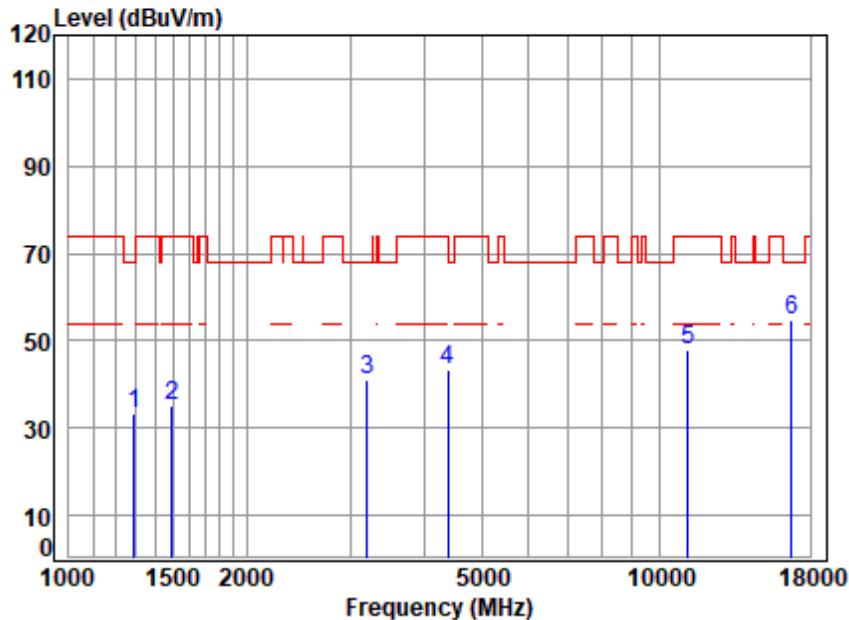


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5580 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	65.89	33.13	68.20	-35.07	peak
2	1494.455	4.03	26.64	61.49	65.90	35.08	74.00	-38.92	peak
3	3205.345	6.26	32.81	61.61	63.49	40.95	68.20	-27.25	peak
4	4392.376	7.13	34.74	61.20	62.53	43.20	74.00	-30.80	peak
5	11160.000	11.77	37.62	61.41	60.06	48.04	74.00	-25.96	peak
6	p16740.000	14.15	42.78	60.76	58.42	54.59	68.20	-13.61	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

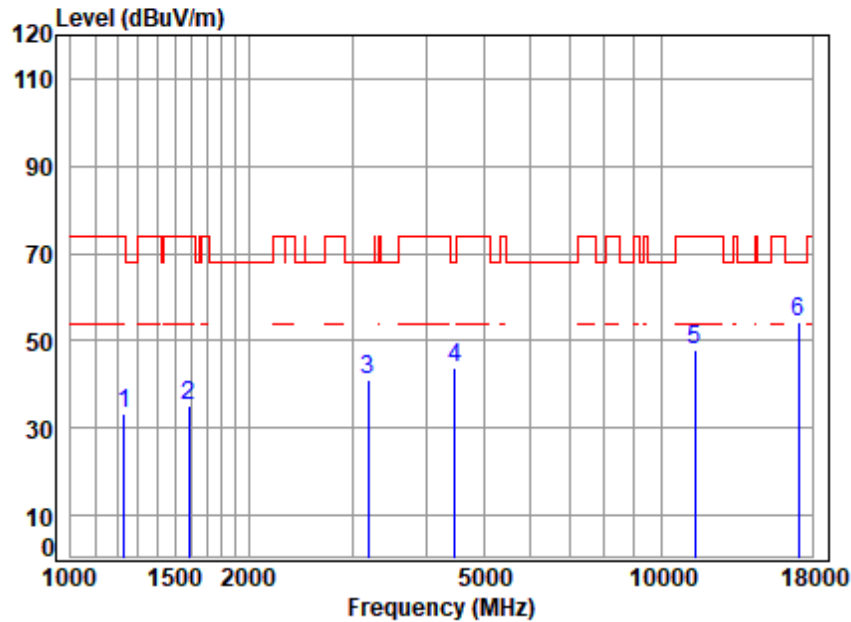


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5700 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.40	66.12	33.28	74.00	-40.72	peak
2	1583.392	4.16	26.87	61.51	65.44	34.96	74.00	-39.04	peak
3	3186.869	6.25	32.79	61.62	63.78	41.20	68.20	-27.00	peak
4	4469.214	7.22	33.97	61.17	63.88	43.90	68.20	-24.30	peak
5	11400.000	11.90	37.70	61.40	59.81	48.01	74.00	-25.99	peak
6	p17100.000	14.44	43.10	60.56	57.31	54.29	68.20	-13.91	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

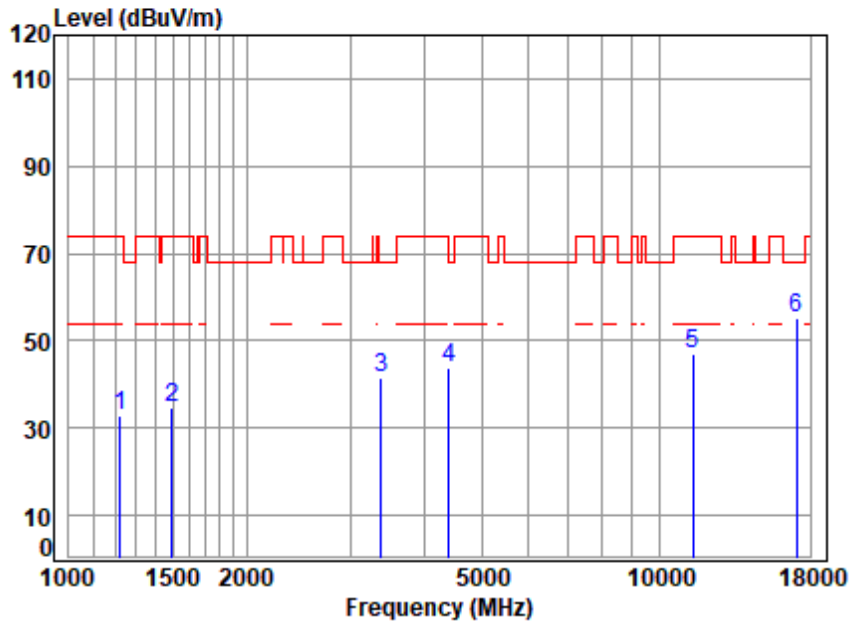


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5700 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1220.714	3.71	24.69	61.39	65.84	32.85	74.00	-41.15	peak
2	1494.455	4.03	26.64	61.49	65.39	34.57	74.00	-39.43	peak
3	3386.297	6.42	32.32	61.55	64.16	41.35	68.20	-26.85	peak
4	4405.090	7.14	34.74	61.20	62.93	43.61	68.20	-24.59	peak
5	11400.000	11.90	37.70	61.40	59.01	47.21	74.00	-26.79	peak
6	p17100.000	14.44	43.10	60.56	58.39	55.37	68.20	-12.83	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

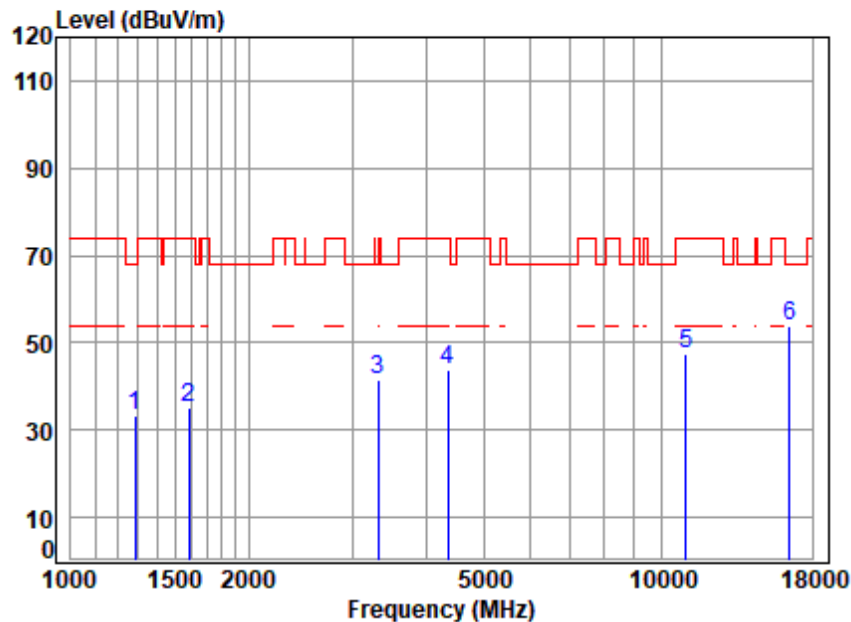


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	65.94	33.19	68.20	-35.01	peak
2	1587.975	4.17	26.85	61.51	65.70	35.21	74.00	-38.79	peak
3	3318.471	6.36	31.53	61.57	65.13	41.45	68.20	-26.75	peak
4	4354.454	7.08	34.44	61.22	63.72	44.02	74.00	-29.98	peak
5	11000.000	11.68	37.50	61.41	59.76	47.53	74.00	-26.47	peak
6	p16500.000	13.99	42.10	60.89	58.68	53.88	68.20	-14.32	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

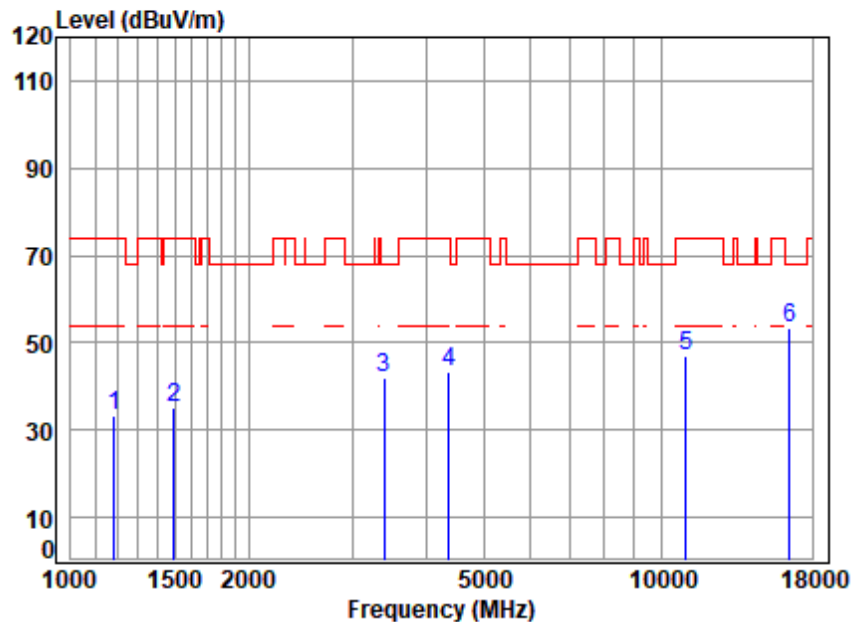


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.38	66.75	33.29	74.00	-40.71	peak
2	1494.455	4.03	26.64	61.49	65.81	34.99	74.00	-39.01	peak
3	3396.098	6.43	32.38	61.55	64.88	42.14	68.20	-26.06	peak
4	4367.058	7.10	34.54	61.21	63.12	43.55	74.00	-30.45	peak
5	11000.000	11.68	37.50	61.41	59.44	47.21	74.00	-26.79	peak
6	p16500.000	13.99	42.10	60.89	58.35	53.55	68.20	-14.65	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

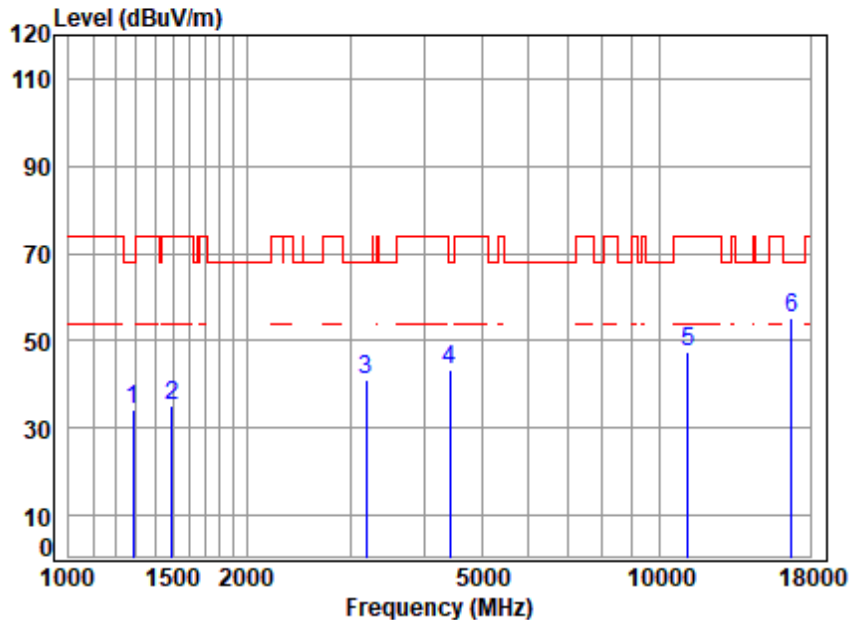


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5580 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	66.99	34.24	68.20	-33.96	peak
2	1494.455	4.03	26.64	61.49	65.91	35.09	74.00	-38.91	peak
3	3186.869	6.25	32.79	61.62	63.51	40.93	68.20	-27.27	peak
4	4417.841	7.16	34.59	61.19	62.63	43.19	68.20	-25.01	peak
5	11160.000	11.77	37.62	61.41	59.33	47.31	74.00	-26.69	peak
6	p16740.000	14.15	42.78	60.76	58.95	55.12	68.20	-13.08	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

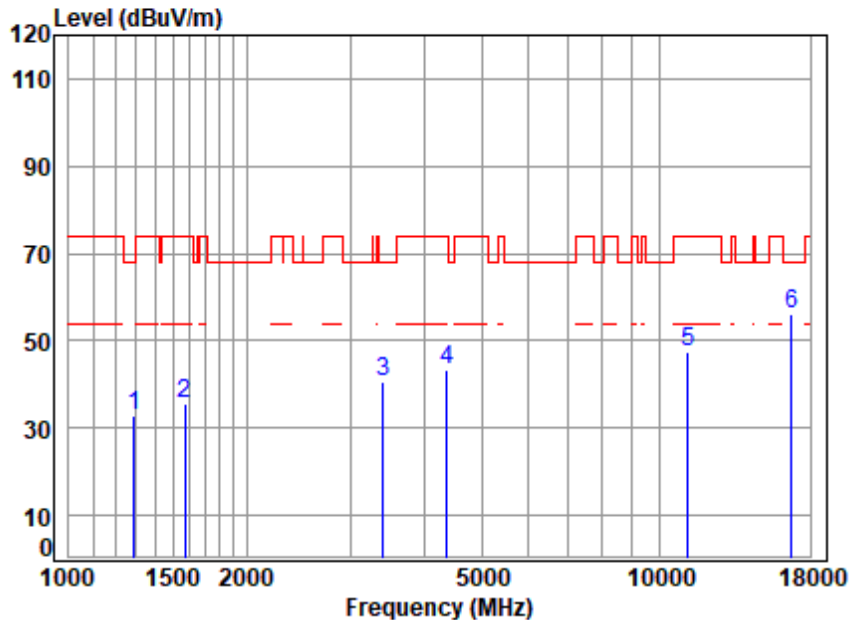


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5580 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	65.44	32.68	68.20	-35.52	peak
2	1574.265	4.15	26.90	61.51	65.99	35.53	74.00	-38.47	peak
3	3405.929	6.44	32.33	61.55	63.51	40.73	68.20	-27.47	peak
4	4367.058	7.10	34.54	61.21	62.87	43.30	74.00	-30.70	peak
5	11160.000	11.77	37.62	61.41	59.25	47.23	74.00	-26.77	peak
6	p16740.000	14.15	42.78	60.76	60.01	56.18	68.20	-12.02	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

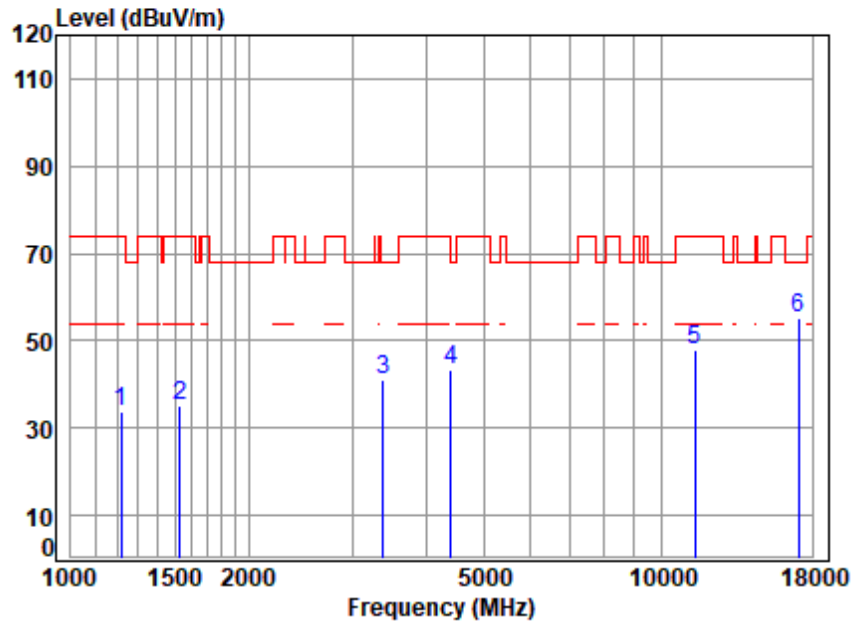


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	3.71	24.64	61.39	66.76	33.72	74.00	-40.28	peak
2	1529.414	4.08	26.92	61.50	65.75	35.25	74.00	-38.75	peak
3	3386.297	6.42	32.32	61.55	63.78	40.97	68.20	-27.23	peak
4	4405.090	7.14	34.74	61.20	62.70	43.38	68.20	-24.82	peak
5	11400.000	11.90	37.70	61.40	59.53	47.73	74.00	-26.27	peak
6	17100.000	14.44	43.10	60.56	58.16	55.14	68.20	-13.06	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

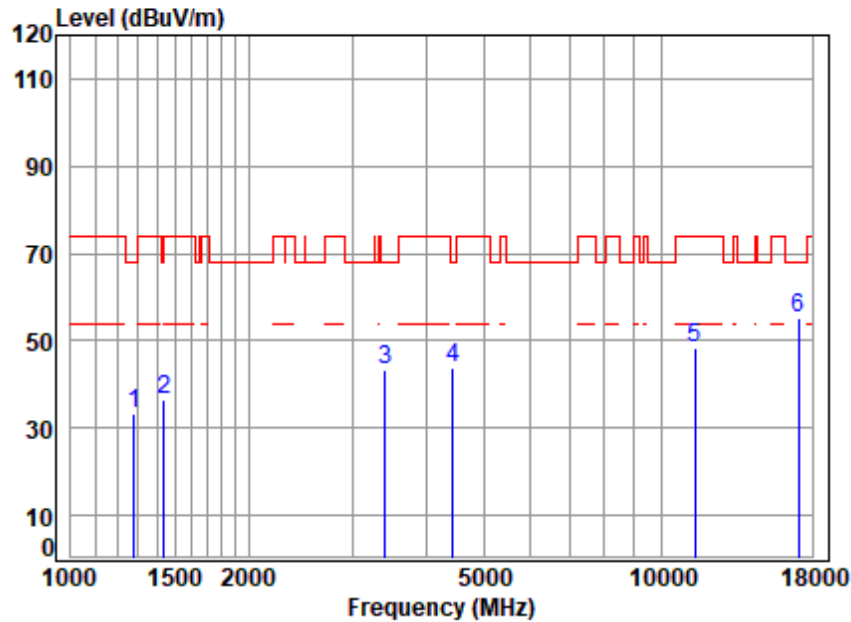


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.41	66.03	33.32	68.20	-34.88	peak
2	1439.343	3.97	25.23	61.47	68.78	36.51	74.00	-37.49	peak
3	3405.929	6.44	32.33	61.55	65.97	43.19	68.20	-25.01	peak
4	4443.453	7.19	34.28	61.18	63.33	43.62	68.20	-24.58	peak
5	11400.000	11.90	37.70	61.40	60.19	48.39	74.00	-25.61	peak
6	p17100.000	14.44	43.10	60.56	58.42	55.40	68.20	-12.80	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

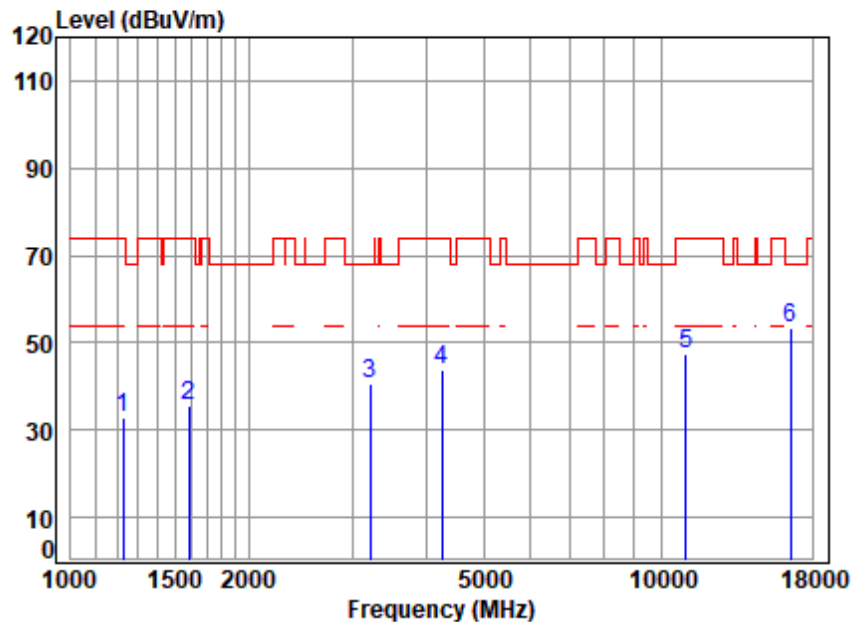


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5510 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.39	65.85	32.97	74.00	-41.03	peak
2	1587.975	4.17	26.85	61.51	65.96	35.47	74.00	-38.53	peak
3	3214.623	6.27	32.67	61.61	63.45	40.78	68.20	-27.42	peak
4	4242.641	6.95	33.80	61.27	64.35	43.83	74.00	-30.17	peak
5	11020.000	11.69	37.50	61.41	59.71	47.49	74.00	-26.51	peak
6	p16530.000	14.01	42.16	60.88	58.18	53.47	68.20	-14.73	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

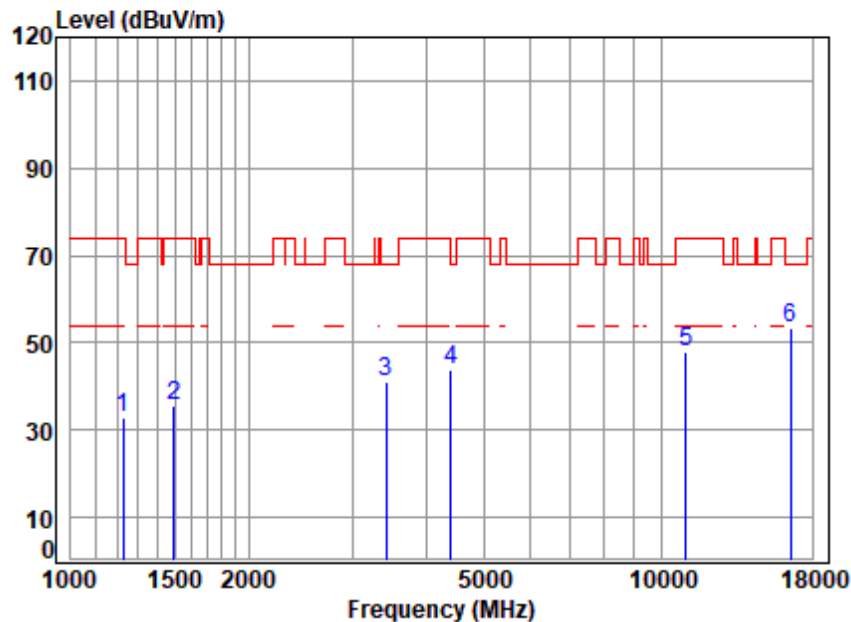


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5510 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.39	65.91	33.03	74.00	-40.97	peak
2	1494.455	4.03	26.64	61.49	66.21	35.39	74.00	-38.61	peak
3	3415.787	6.45	32.21	61.54	63.96	41.08	68.20	-27.12	peak
4	4405.090	7.14	34.74	61.20	63.03	43.71	68.20	-24.49	peak
5	11020.000	11.69	37.50	61.41	59.92	47.70	74.00	-26.30	peak
6	p16530.000	14.01	42.16	60.88	58.26	53.55	68.20	-14.65	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

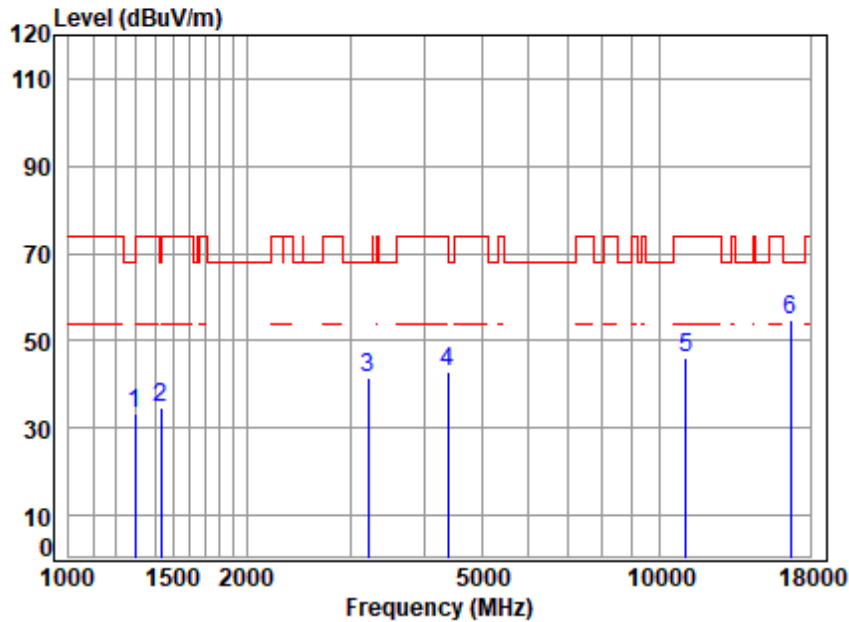


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5550 TX RSE
 Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	66.03	33.25	68.20	-34.95	peak
2	1435.189	3.97	25.16	61.47	67.02	34.68	74.00	-39.32	peak
3	3214.623	6.27	32.67	61.61	64.38	41.71	68.20	-26.49	peak
4	4392.376	7.13	34.74	61.20	62.11	42.78	74.00	-31.22	peak
5	11100.000	11.73	37.50	61.41	58.25	46.07	74.00	-27.93	peak
6	16650.000	14.09	42.50	60.81	58.97	54.75	68.20	-13.45	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

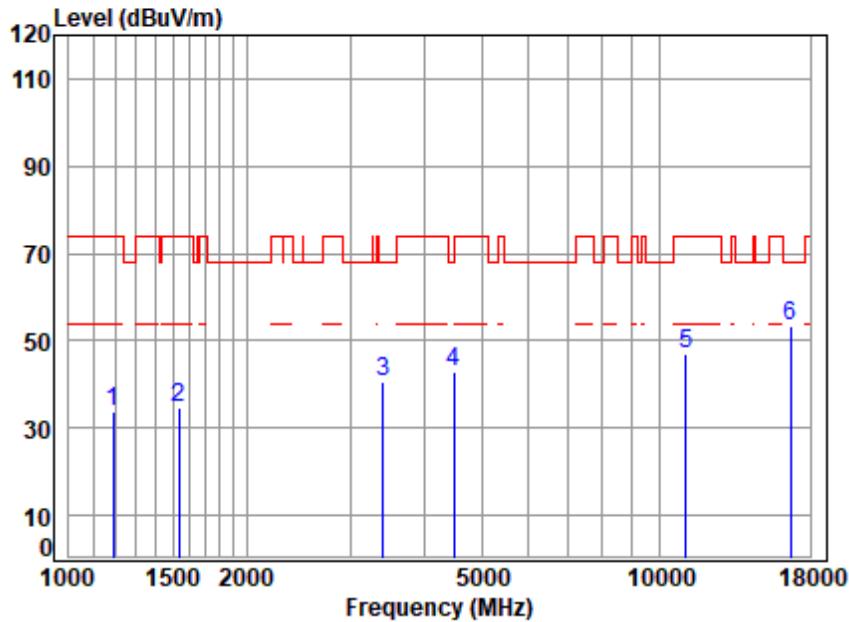


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5550 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	3.67	24.29	61.38	66.99	33.57	74.00	-40.43	peak
2	1533.841	4.09	26.94	61.50	65.02	34.55	74.00	-39.45	peak
3	3405.929	6.44	32.33	61.55	63.60	40.82	68.20	-27.38	peak
4	4482.150	7.23	33.81	61.16	63.04	42.92	68.20	-25.28	peak
5	11100.000	11.73	37.50	61.41	59.01	46.83	74.00	-27.17	peak
6	p16650.000	14.09	42.50	60.81	57.63	53.41	68.20	-14.79	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

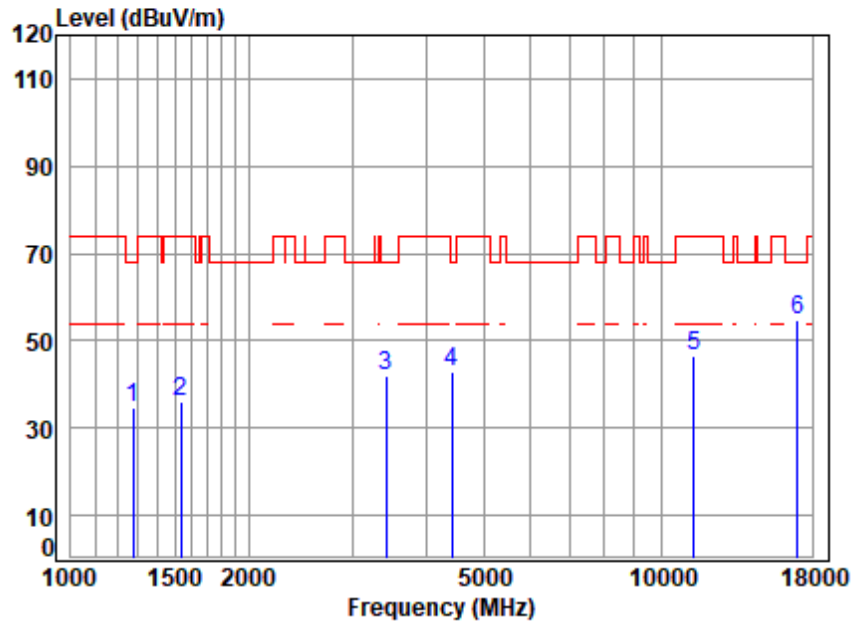


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5670 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.78	24.95	61.41	67.24	34.56	68.20	-33.64	peak
2	1533.841	4.09	26.94	61.50	66.49	36.02	74.00	-37.98	peak
3	3415.787	6.45	32.21	61.54	64.92	42.04	68.20	-26.16	peak
4	4417.841	7.16	34.59	61.19	62.51	43.07	68.20	-25.13	peak
5	11340.000	11.86	37.76	61.40	58.30	46.52	74.00	-27.48	peak
6	p17010.000	14.33	43.10	60.61	58.11	54.93	68.20	-13.27	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

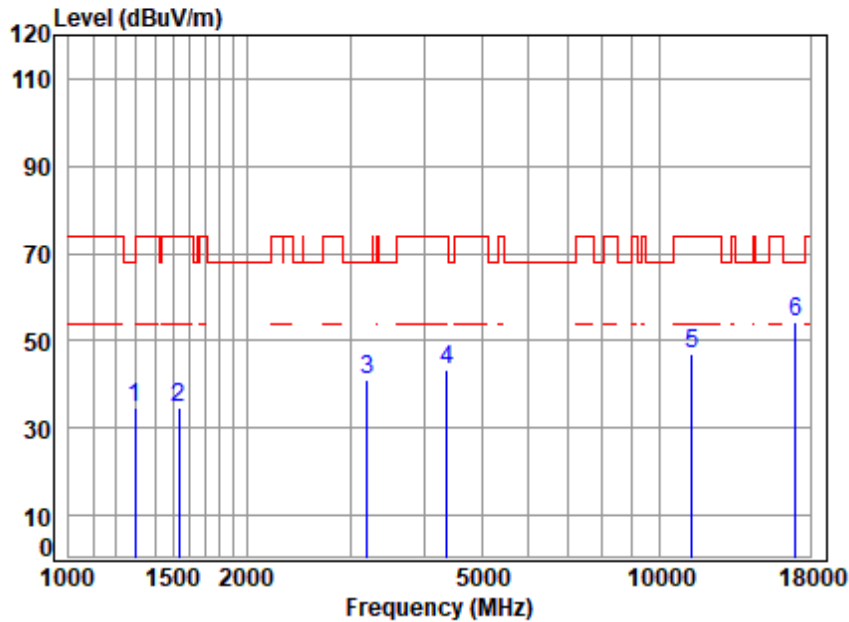


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5670 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	67.38	34.60	68.20	-33.60	peak
2	1538.281	4.10	26.95	61.50	64.97	34.52	74.00	-39.48	peak
3	3205.345	6.26	32.81	61.61	63.78	41.24	68.20	-26.96	peak
4	4367.058	7.10	34.54	61.21	63.12	43.55	74.00	-30.45	peak
5	11340.000	11.86	37.76	61.40	58.92	47.14	74.00	-26.86	peak
6	p17010.000	14.33	43.10	60.61	57.29	54.11	68.20	-14.09	peak



Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

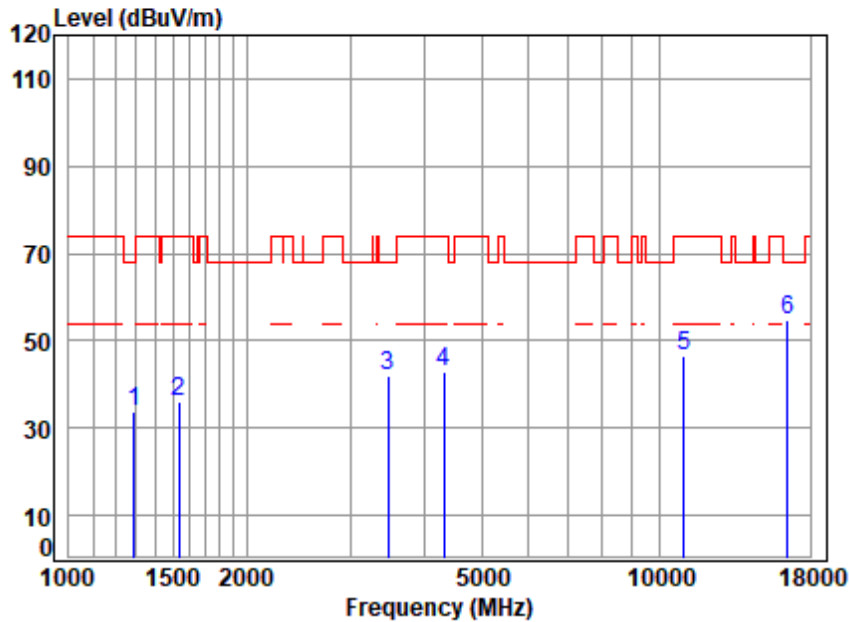


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.38	33.62	68.20	-34.58	peak
2	1533.841	4.09	26.94	61.50	66.39	35.92	74.00	-38.08	peak
3	3475.541	6.50	31.70	61.53	65.11	41.78	68.20	-26.42	peak
4	4316.859	7.04	34.13	61.24	63.12	43.05	74.00	-30.95	peak
5	11000.000	11.68	37.50	61.41	58.70	46.47	74.00	-27.53	peak
6	p16500.000	13.99	42.10	60.89	59.49	54.69	68.20	-13.51	peak



Test Mode: 05; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

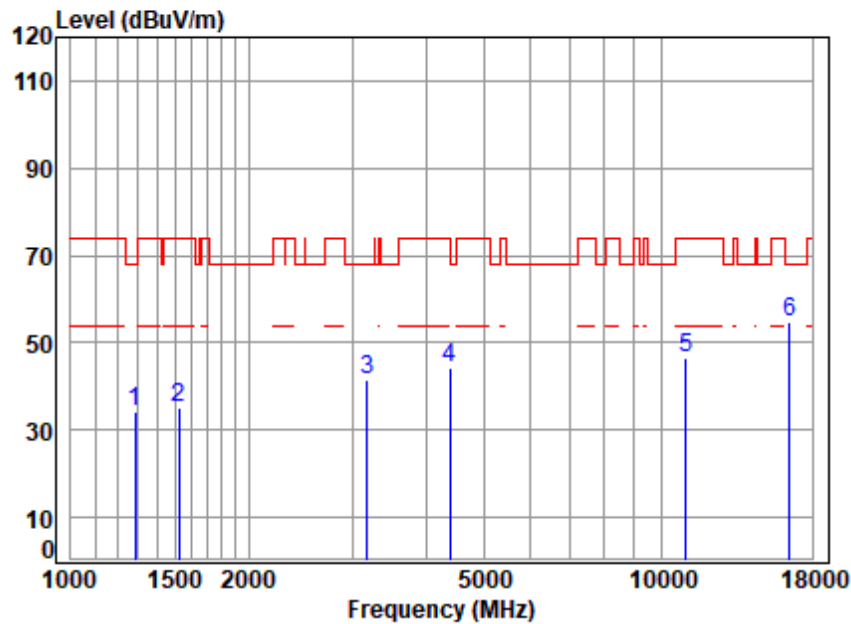

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	66.86	34.11	68.20	-34.09	peak
2	1525.000	4.08	26.90	61.49	65.44	34.93	74.00	-39.07	peak
3	3177.672	6.24	32.72	61.62	64.30	41.64	68.20	-26.56	peak
4	4392.376	7.13	34.74	61.20	63.74	44.41	74.00	-29.59	peak
5	11000.000	11.68	37.50	61.41	58.87	46.64	74.00	-27.36	peak
6	p16500.000	13.99	42.10	60.89	59.43	54.63	68.20	-13.57	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 106 of 715

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: middle

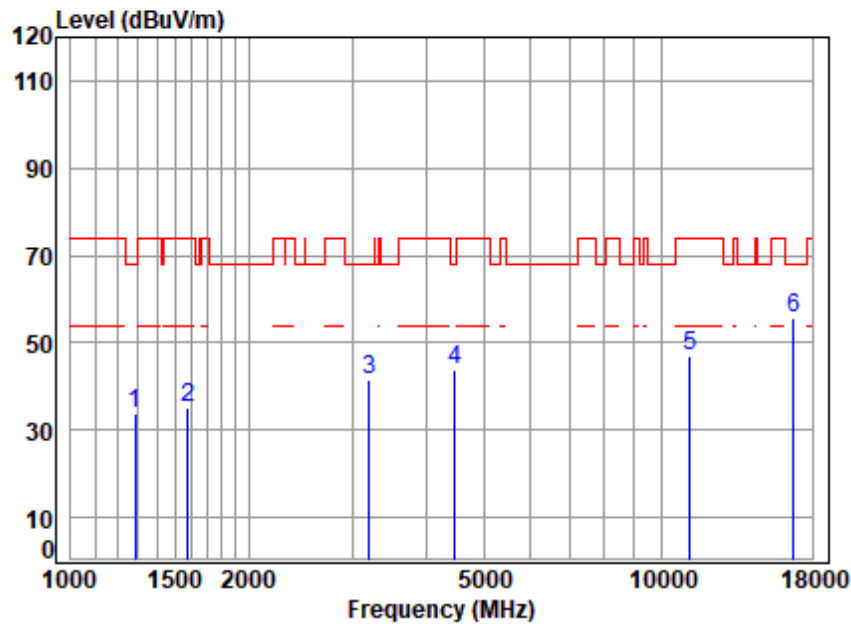

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5580 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	66.46	33.71	68.20	-34.49	peak
2	1578.822	4.16	26.88	61.51	65.56	35.09	74.00	-38.91	peak
3	3205.345	6.26	32.81	61.61	63.88	41.34	68.20	-26.86	peak
4	4469.214	7.22	33.97	61.17	63.99	44.01	68.20	-24.19	peak
5	11160.000	11.77	37.62	61.41	58.92	46.90	74.00	-27.10	peak
6	p16740.000	14.15	42.78	60.76	59.49	55.66	68.20	-12.54	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

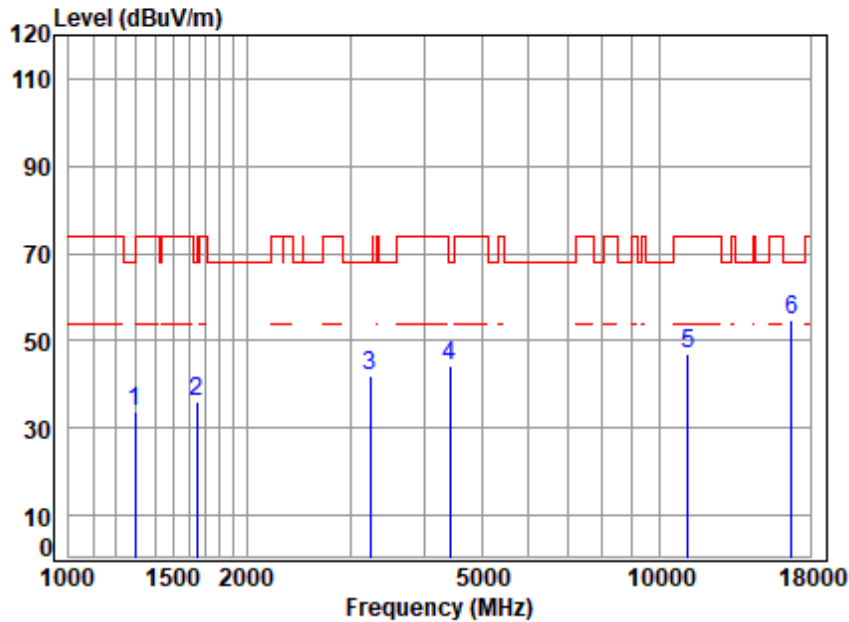

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5580 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	66.36	33.58	68.20	-34.62	peak
2	1648.778	4.25	26.31	61.53	67.03	36.06	68.20	-32.14	peak
3	3242.619	6.30	32.22	61.60	65.05	41.97	68.20	-26.23	peak
4	4417.841	7.16	34.59	61.19	63.75	44.31	68.20	-23.89	peak
5	11160.000	11.77	37.62	61.41	59.03	47.01	74.00	-26.99	peak
6	p16740.000	14.15	42.78	60.76	58.52	54.69	68.20	-13.51	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 108 of 715

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: High

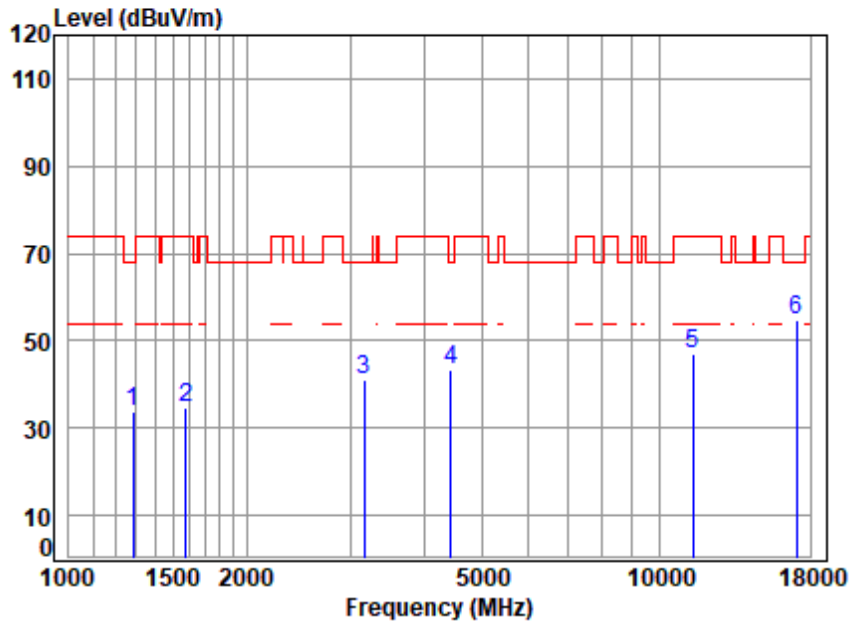

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5700 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	66.37	33.62	68.20	-34.58	peak
2	1578.822	4.16	26.88	61.51	65.13	34.66	74.00	-39.34	peak
3	3168.500	6.23	32.65	61.62	63.73	40.99	68.20	-27.21	peak
4	4430.628	7.17	34.43	61.19	62.89	43.30	68.20	-24.90	peak
5	11400.000	11.90	37.70	61.40	58.77	46.97	74.00	-27.03	peak
6	p17100.000	14.44	43.10	60.56	57.76	54.74	68.20	-13.46	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 109 of 715

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

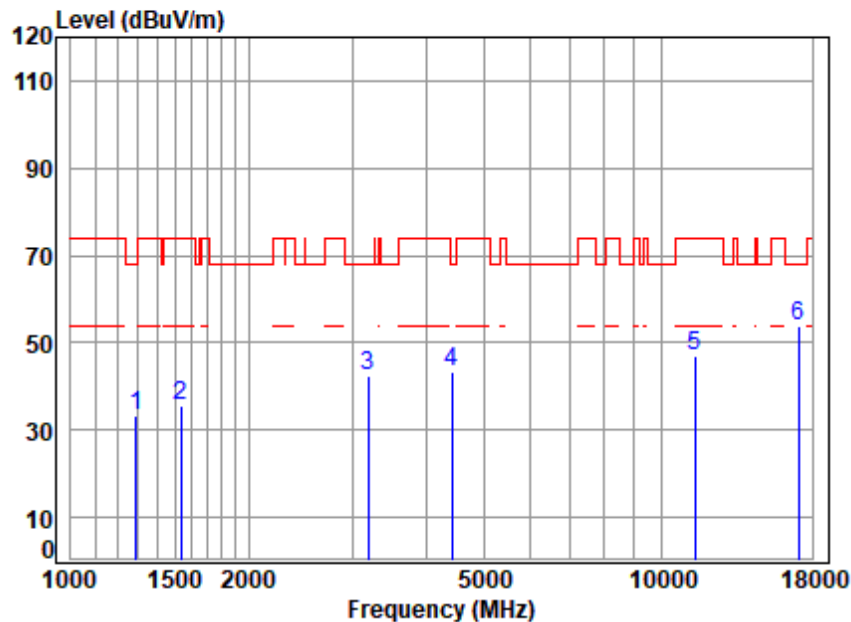

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5700 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.10	33.34	68.20	-34.86	peak
2	1533.841	4.09	26.94	61.50	66.23	35.76	74.00	-38.24	peak
3	3186.869	6.25	32.79	61.62	65.04	42.46	68.20	-25.74	peak
4	4417.841	7.16	34.59	61.19	62.76	43.32	68.20	-24.88	peak
5	11400.000	11.90	37.70	61.40	58.96	47.16	74.00	-26.84	peak
6	p17100.000	14.44	43.10	60.56	57.09	54.07	68.20	-14.13	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

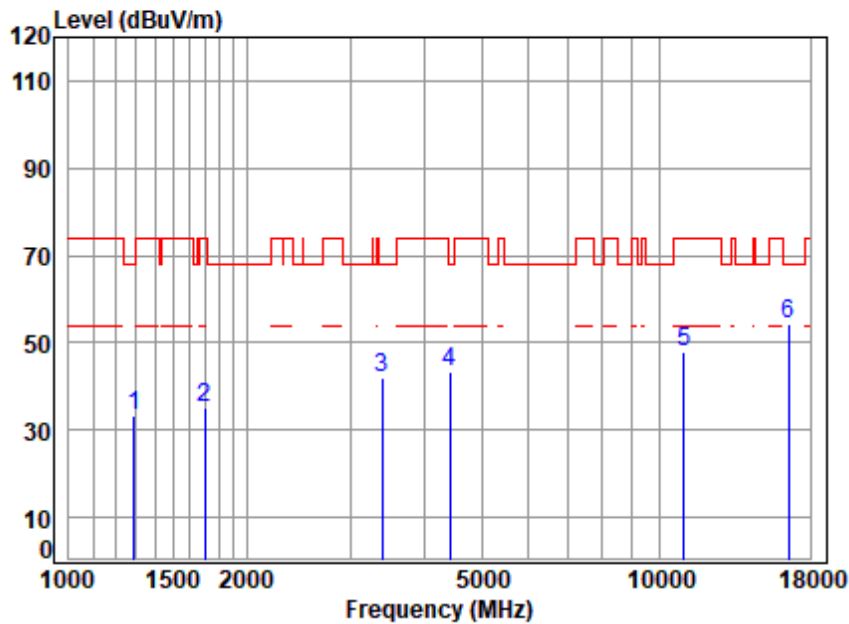


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5510 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	65.93	33.17	68.20	-35.03	peak
2	1697.129	4.32	26.21	61.54	66.08	35.07	74.00	-38.93	peak
3	3396.098	6.43	32.38	61.55	64.72	41.98	68.20	-26.22	peak
4	4417.841	7.16	34.59	61.19	62.87	43.43	68.20	-24.77	peak
5	11020.000	11.69	37.50	61.41	59.93	47.71	74.00	-26.29	peak
6	p16530.000	14.01	42.16	60.88	58.94	54.23	68.20	-13.97	peak



Test Mode: 05; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

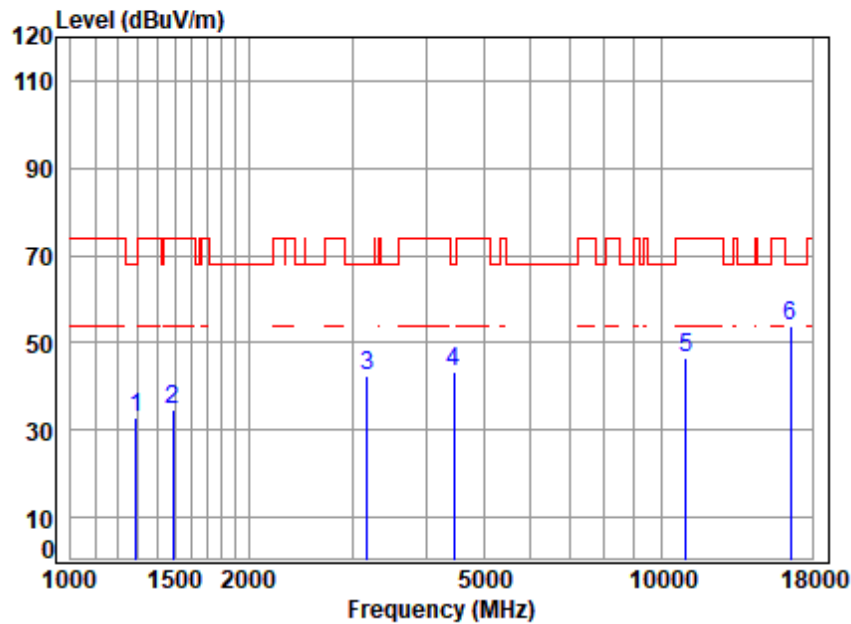


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5510 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	65.63	32.87	68.20	-35.33	peak
2	1490.142	4.03	26.52	61.48	65.42	34.49	74.00	-39.51	peak
3	3177.672	6.24	32.72	61.62	65.00	42.34	68.20	-25.86	peak
4	4456.315	7.20	34.12	61.17	63.25	43.40	68.20	-24.80	peak
5	11020.000	11.69	37.50	61.41	58.88	46.66	74.00	-27.34	peak
6	p16530.000	14.01	42.16	60.88	58.60	53.89	68.20	-14.31	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

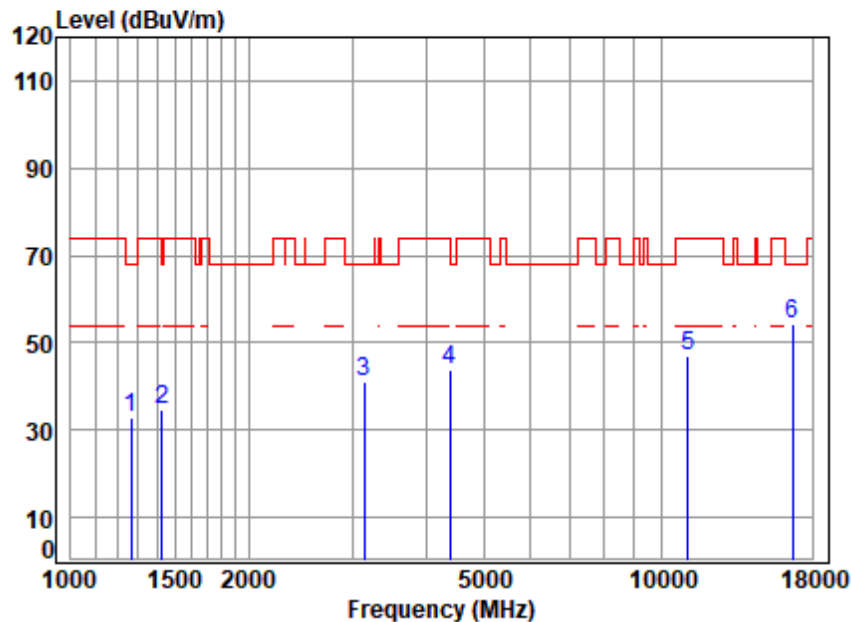


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5550 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	3.77	25.02	61.41	65.29	32.67	68.20	-35.53	peak
2	1426.916	3.96	25.03	61.46	67.16	34.69	74.00	-39.31	peak
3	3141.145	6.20	32.34	61.63	64.10	41.01	68.20	-27.19	peak
4	4392.376	7.13	34.74	61.20	63.04	43.71	74.00	-30.29	peak
5	11100.000	11.73	37.50	61.41	59.35	47.17	74.00	-26.83	peak
6	p16650.000	14.09	42.50	60.81	58.47	54.25	68.20	-13.95	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

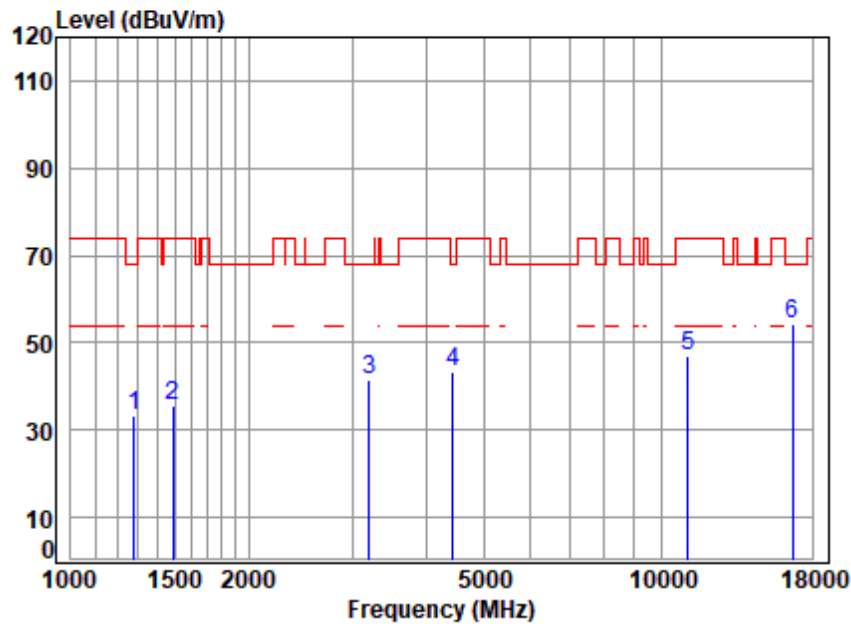

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5550 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.41	66.05	33.34	68.20	-34.86	peak
2	1490.142	4.03	26.52	61.48	66.34	35.41	74.00	-38.59	peak
3	3196.094	6.25	32.87	61.61	63.78	41.29	68.20	-26.91	peak
4	4443.453	7.19	34.28	61.18	63.12	43.41	68.20	-24.79	peak
5	11100.000	11.73	37.50	61.41	59.01	46.83	74.00	-27.17	peak
6	p16650.000	14.09	42.50	60.81	58.57	54.35	68.20	-13.85	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 114 of 715

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

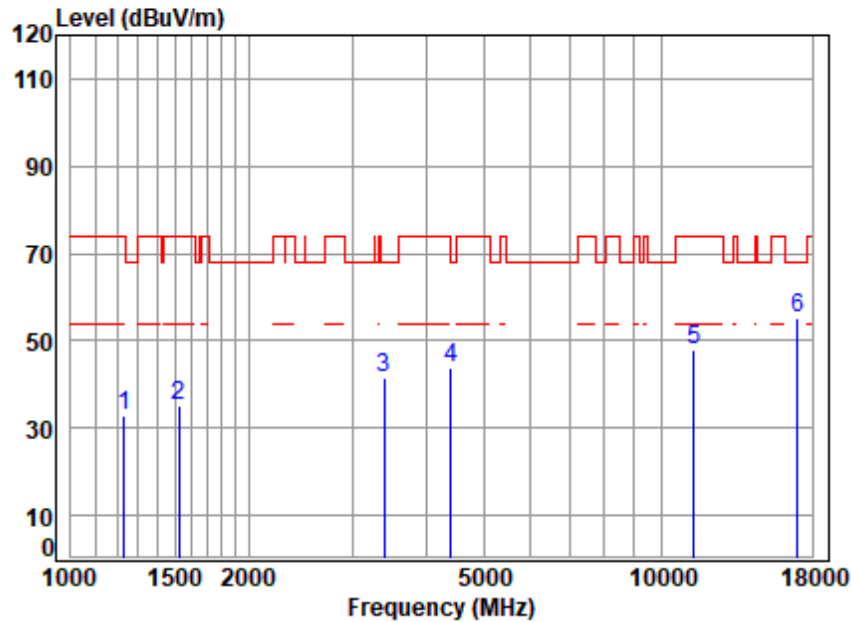

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5670 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.40	65.72	32.88	74.00	-41.12	peak
2	1525.000	4.08	26.90	61.49	65.43	34.92	74.00	-39.08	peak
3	3396.098	6.43	32.38	61.55	64.11	41.37	68.20	-26.83	peak
4	4405.090	7.14	34.74	61.20	63.13	43.81	68.20	-24.39	peak
5	11340.000	11.86	37.76	61.40	59.55	47.77	74.00	-26.23	peak
6	p17010.000	14.33	43.10	60.61	58.57	55.39	68.20	-12.81	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

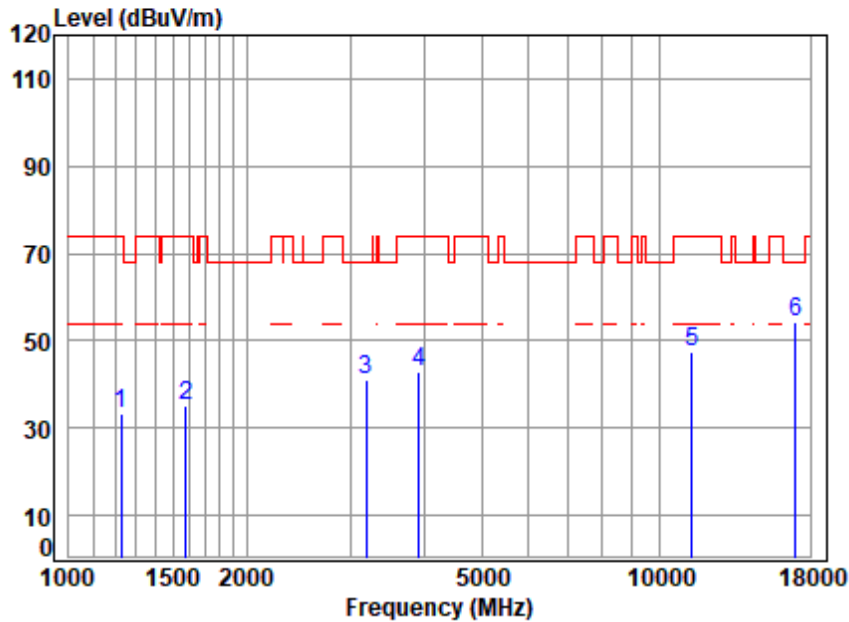

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5670 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.39	66.31	33.43	74.00	-40.57	peak
2	1578.822	4.16	26.88	61.51	65.69	35.22	74.00	-38.78	peak
3	3186.869	6.25	32.79	61.62	63.58	41.00	68.20	-27.20	peak
4	3912.809	6.63	33.72	61.40	63.94	42.89	74.00	-31.11	peak
5	11340.000	11.86	37.76	61.40	59.26	47.48	74.00	-26.52	peak
6	p17010.000	14.33	43.10	60.61	57.54	54.36	68.20	-13.84	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 116 of 715

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: middle

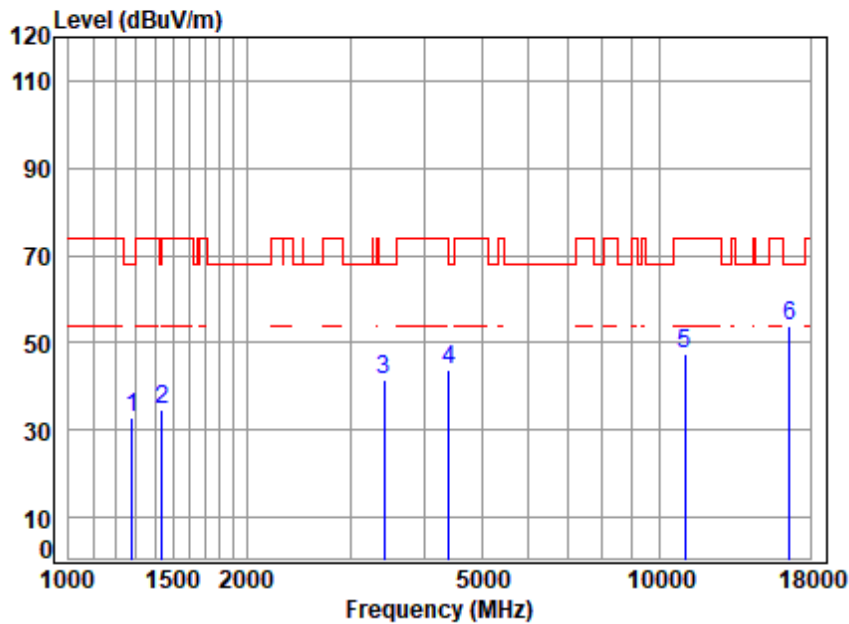

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5530 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.41	65.43	32.72	68.20	-35.48	peak
2	1439.343	3.97	25.23	61.47	67.02	34.75	74.00	-39.25	peak
3	3415.787	6.45	32.21	61.54	64.31	41.43	68.20	-26.77	peak
4	4405.090	7.14	34.74	61.20	63.18	43.86	68.20	-24.34	peak
5	11060.000	11.71	37.50	61.41	59.86	47.66	74.00	-26.34	peak
6	p16590.000	14.05	42.28	60.84	58.24	53.73	68.20	-14.47	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

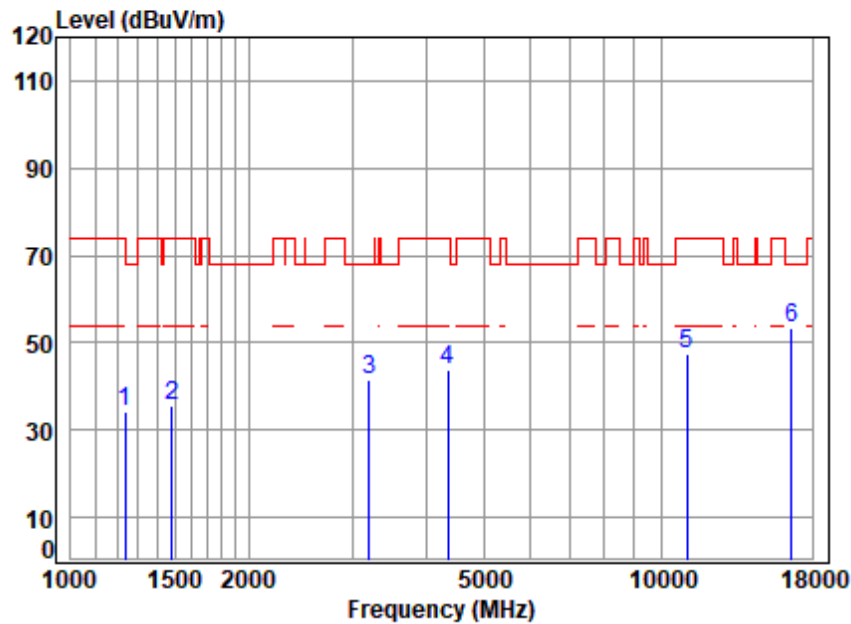


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5530 TX RSE
Note : 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	61.40	66.72	33.99	74.00	-40.01	peak
2	1485.841	4.02	26.40	61.48	66.47	35.41	74.00	-38.59	peak
3	3205.345	6.26	32.81	61.61	63.85	41.31	68.20	-26.89	peak
4	4354.454	7.08	34.44	61.22	63.34	43.64	74.00	-30.36	peak
5	11060.000	11.71	37.50	61.41	59.88	47.68	74.00	-26.32	peak
6	p16590.000	14.05	42.28	60.84	58.03	53.52	68.20	-14.68	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

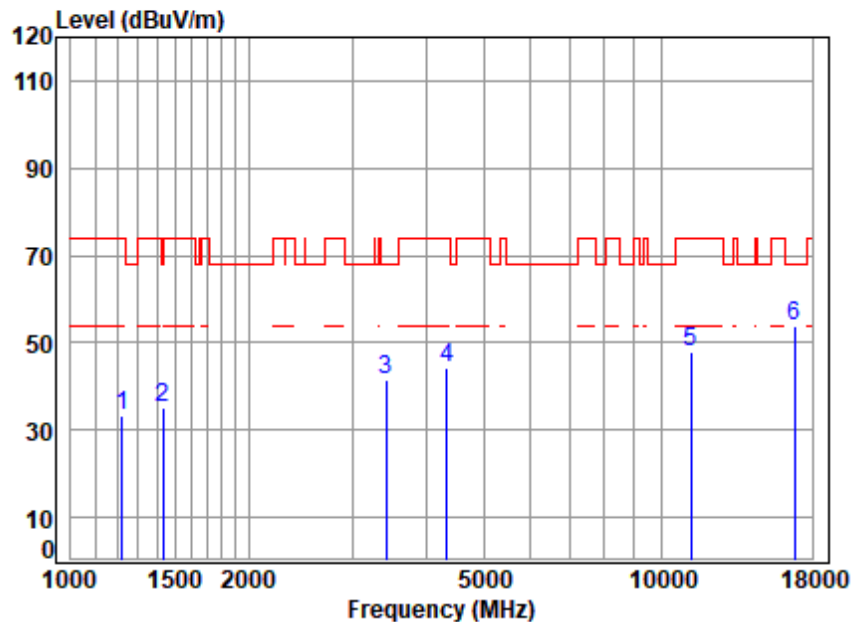


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5610 TX RSE
Note : 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1220.714	3.71	24.69	61.39	66.44	33.45	74.00	-40.55	peak
2	1435.189	3.97	25.16	61.47	67.31	34.97	74.00	-39.03	peak
3	3425.675	6.46	32.09	61.54	64.51	41.52	68.20	-26.68	peak
4	4329.354	7.05	34.23	61.23	64.22	44.27	74.00	-29.73	peak
5	11220.000	11.80	37.72	61.40	59.74	47.86	74.00	-26.14	peak
6	p16830.000	14.21	42.99	60.71	57.27	53.76	68.20	-14.44	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

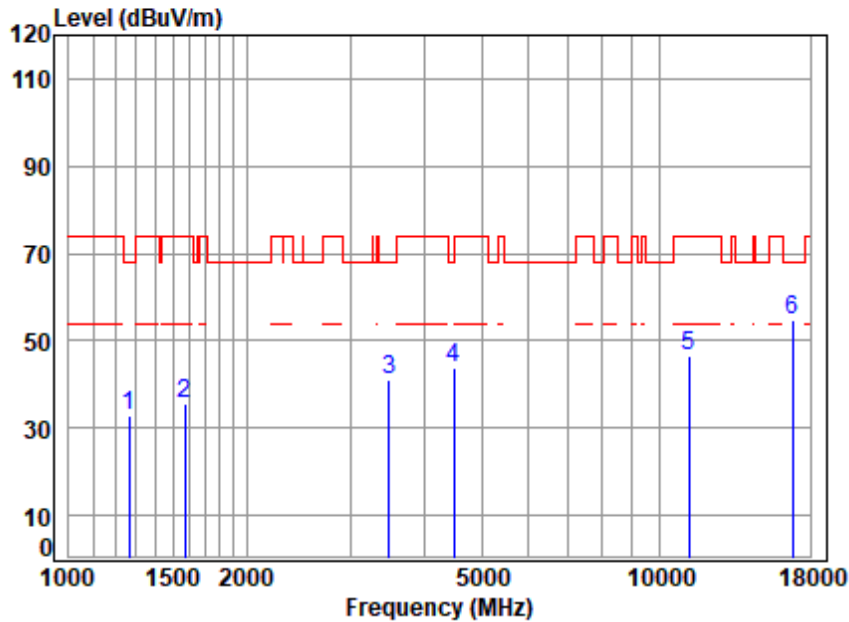


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5610 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.77	25.00	61.41	65.62	32.98	68.20	-35.22	peak
2	1574.265	4.15	26.90	61.51	65.94	35.48	74.00	-38.52	peak
3	3485.601	6.51	31.66	61.52	64.51	41.16	68.20	-27.04	peak
4	4495.125	7.24	33.66	61.16	64.09	43.83	68.20	-24.37	peak
5	11220.000	11.80	37.72	61.40	58.49	46.61	74.00	-27.39	peak
6	p16830.000	14.21	42.99	60.71	58.14	54.63	68.20	-13.57	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

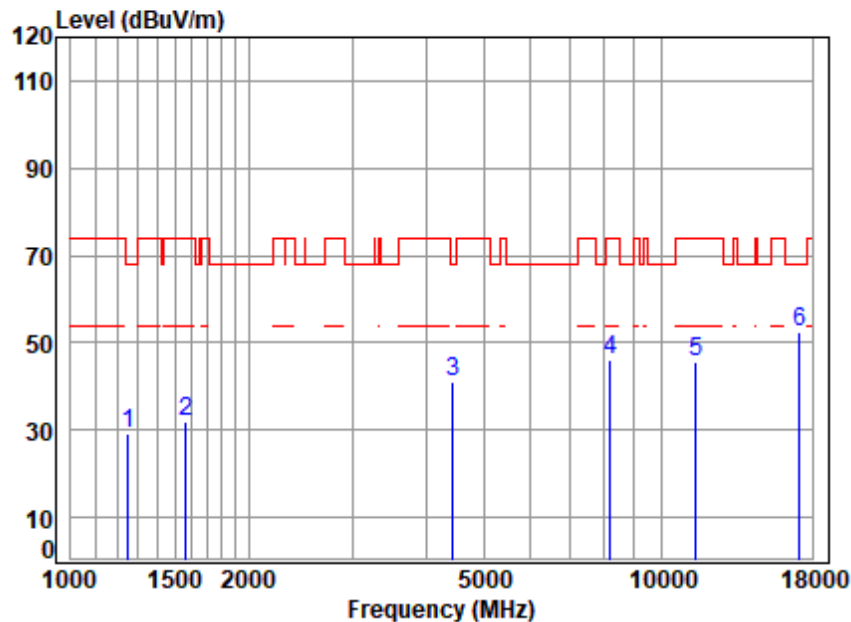


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5720 TX RSE
 Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	54.70	55.08	29.21	68.20	-38.99	peak
2	1565.191	4.14	26.94	54.79	55.65	31.94	74.00	-42.06	peak
3	4430.628	7.17	34.43	54.25	53.55	40.90	68.20	-27.30	peak
4	8200.463	9.23	36.60	53.21	53.31	45.93	74.00	-28.07	peak
5	11440.000	11.92	37.74	53.09	48.96	45.53	74.00	-28.47	peak
6	17160.000	14.50	43.04	52.82	47.78	52.50	68.20	-15.70	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

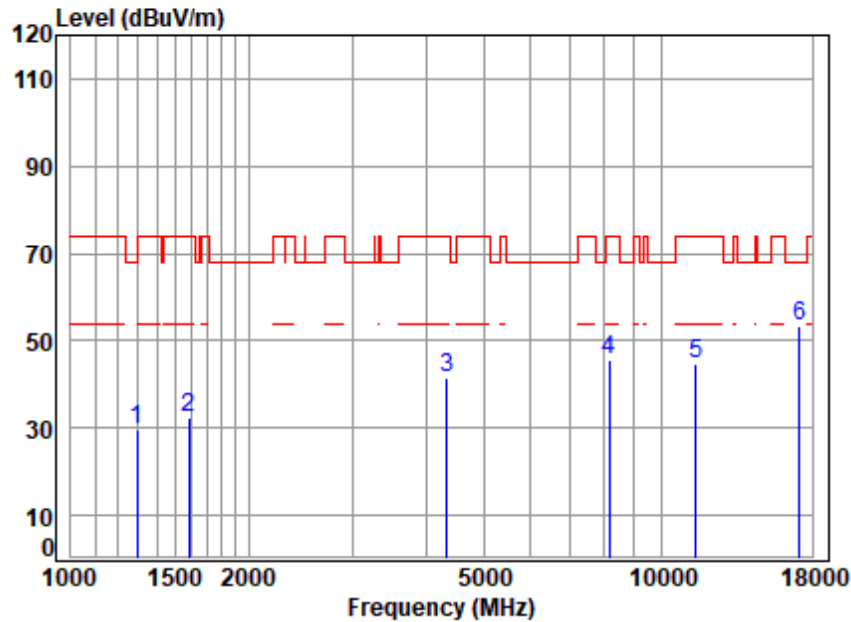


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5720 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.81	24.82	54.71	55.95	29.87	68.20	-38.33	peak
2	1587.975	4.17	26.85	54.80	56.04	32.26	74.00	-41.74	peak
3	4329.354	7.05	34.23	54.26	54.71	41.73	74.00	-32.27	peak
4	8153.195	9.19	36.51	53.18	53.09	45.61	74.00	-28.39	peak
5	11440.000	11.92	37.74	53.09	48.29	44.86	74.00	-29.14	peak
6	p17160.000	14.50	43.04	52.82	48.69	53.41	68.20	-14.79	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

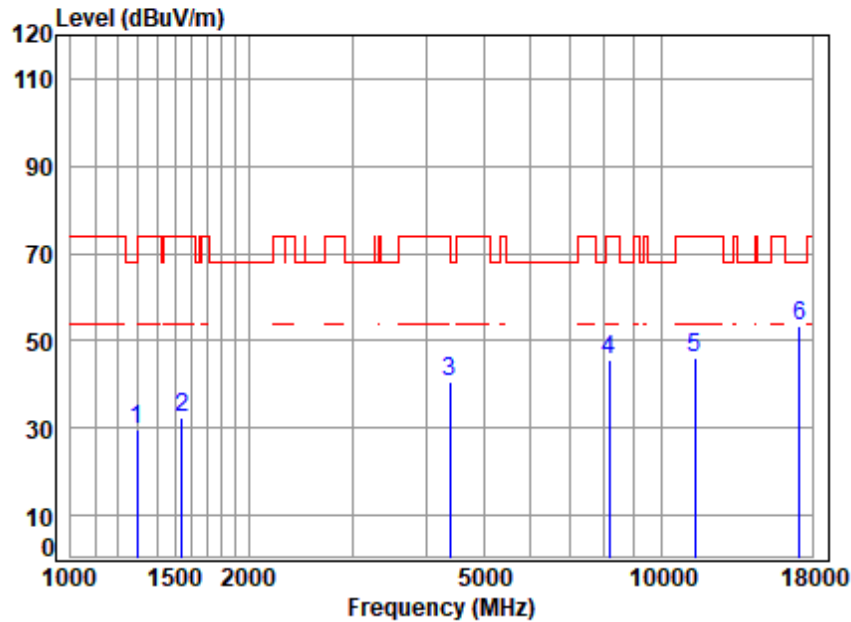

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5710 TX RSE
 Note : 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	54.71	55.86	29.79	68.20	-38.41	peak
2	1542.733	4.10	26.97	54.79	56.16	32.44	74.00	-41.56	peak
3	4379.699	7.11	34.64	54.26	53.22	40.71	74.00	-33.29	peak
4	8176.795	9.21	36.55	53.19	53.14	45.71	74.00	-28.29	peak
5	11420.000	11.91	37.72	53.09	49.74	46.28	74.00	-27.72	peak
6	17130.000	14.47	43.07	52.83	48.82	53.53	68.20	-14.67	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

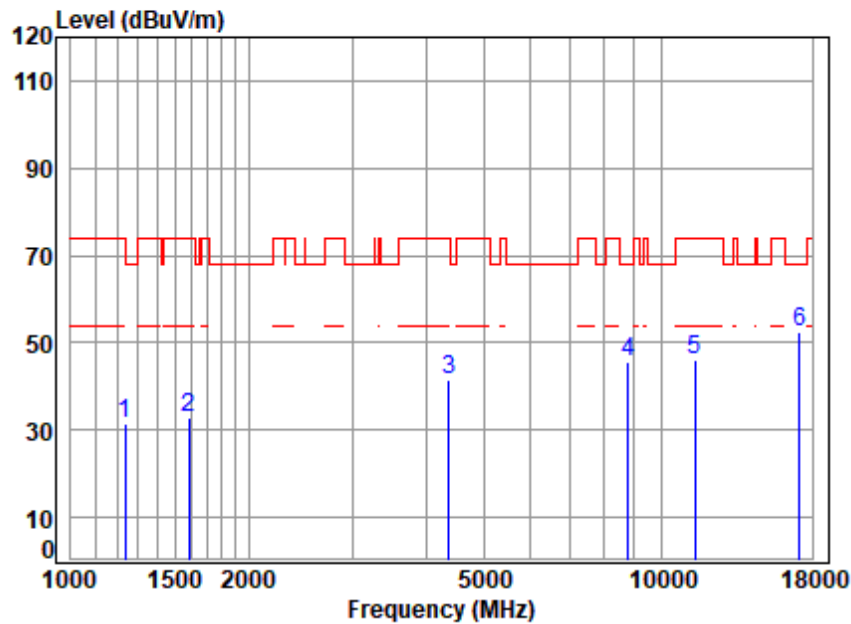

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5710 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1238.483	3.73	24.94	54.69	57.60	31.58	74.00	-42.42	peak
2	1587.975	4.17	26.85	54.80	56.42	32.64	74.00	-41.36	peak
3	4367.058	7.10	34.54	54.26	53.98	41.36	74.00	-32.64	peak
4	8789.516	9.76	37.06	53.50	52.43	45.75	68.20	-22.45	peak
5	11420.000	11.91	37.72	53.09	49.33	45.87	74.00	-28.13	peak
6	p17130.000	14.47	43.07	52.83	47.91	52.62	68.20	-15.58	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 124 of 715

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: High

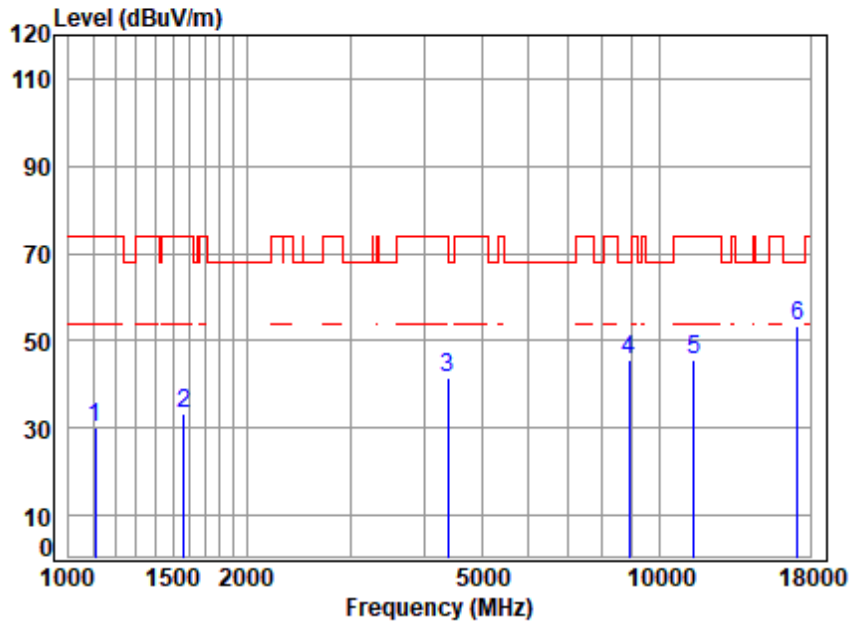

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5720 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1109.660	3.56	23.74	54.65	57.51	30.16	74.00	-43.84	peak
2	1569.721	4.14	26.92	54.80	56.87	33.13	74.00	-40.87	peak
3	4392.376	7.13	34.74	54.26	53.93	41.54	74.00	-32.46	peak
4	8891.725	9.84	37.20	53.55	52.28	45.77	68.20	-22.43	peak
5	11440.000	11.92	37.74	53.09	49.17	45.74	74.00	-28.26	peak
6	17160.000	14.50	43.04	52.82	48.71	53.43	68.20	-14.77	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

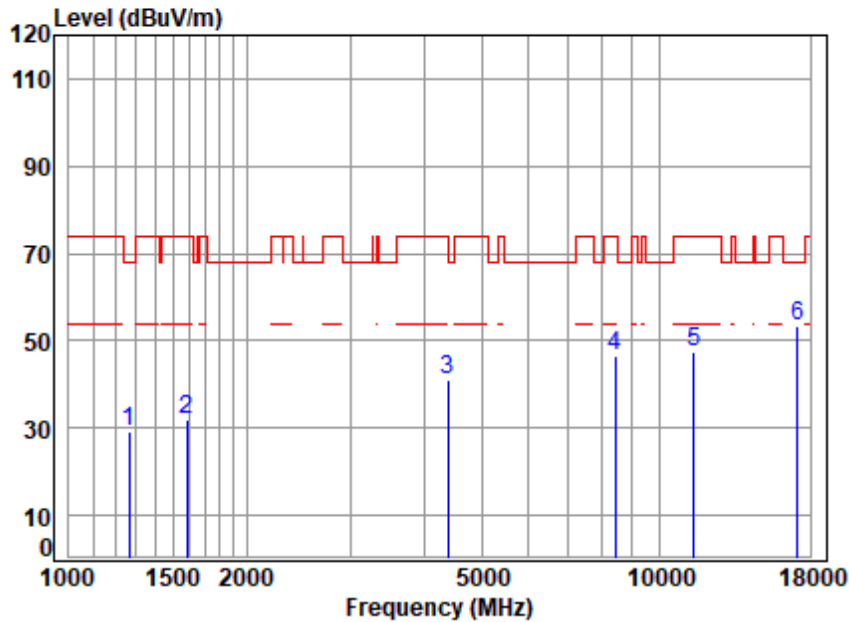

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5720 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	3.77	25.00	54.70	55.32	29.39	68.20	-38.81	peak
2	1587.975	4.17	26.85	54.80	55.75	31.97	74.00	-42.03	peak
3	4392.376	7.13	34.74	54.26	53.27	40.88	74.00	-33.12	peak
4	8416.584	9.45	36.67	53.32	53.75	46.55	74.00	-27.45	peak
5	11440.000	11.92	37.74	53.09	50.87	47.44	74.00	-26.56	peak
6	p17160.000	14.50	43.04	52.82	48.76	53.48	68.20	-14.72	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 126 of 715

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: High

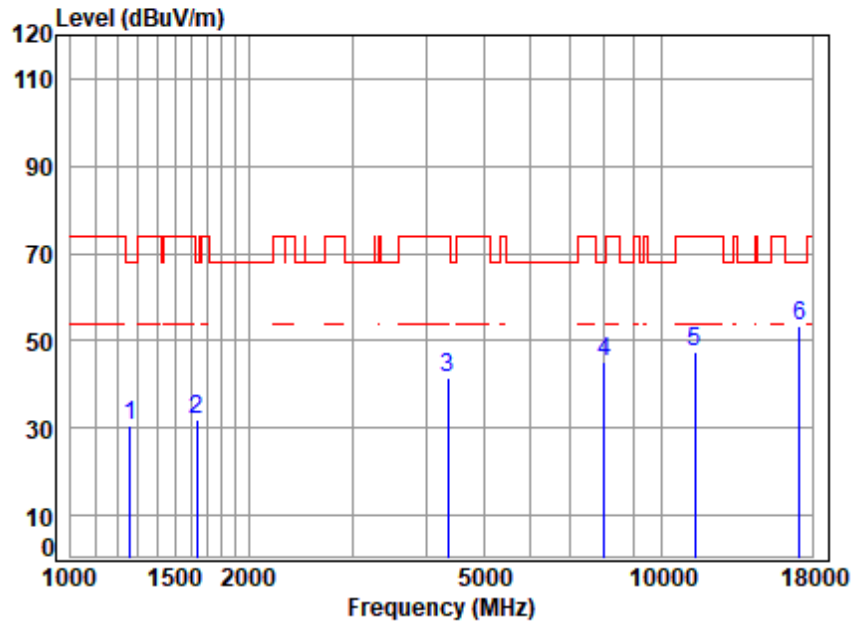

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5710 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	3.76	25.04	54.70	56.30	30.40	68.20	-37.80	peak
2	1634.543	4.23	26.45	54.81	56.29	32.16	68.20	-36.04	peak
3	4354.454	7.08	34.44	54.26	54.22	41.48	74.00	-32.52	peak
4	8013.020	9.04	36.40	53.11	52.74	45.07	68.20	-23.13	peak
5	11420.000	11.91	37.72	53.09	50.77	47.31	74.00	-26.69	peak
6	p17130.000	14.47	43.07	52.83	48.70	53.41	68.20	-14.79	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

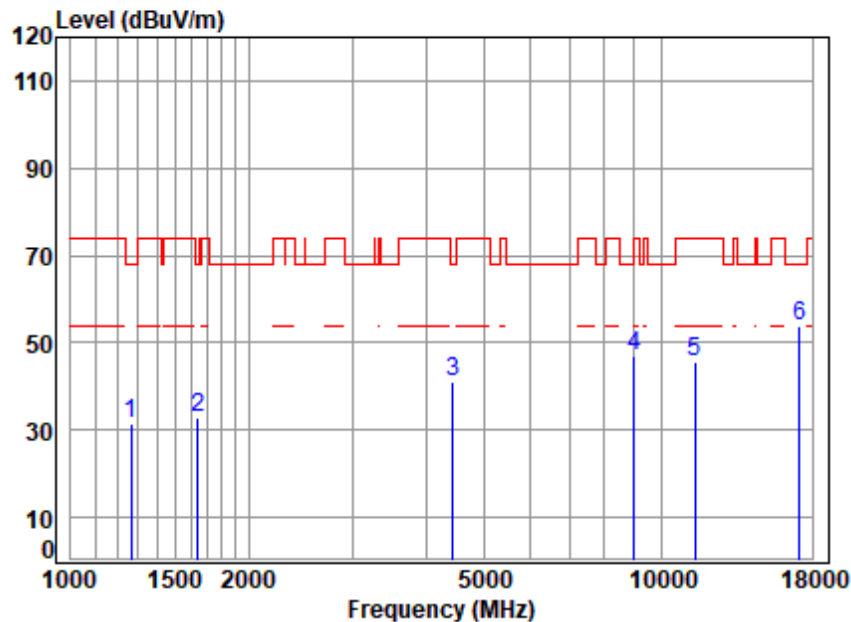


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5710 TX RSE
 Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	3.77	25.02	54.70	57.24	31.33	68.20	-36.87	peak
2	1644.019	4.25	26.36	54.82	56.85	32.64	68.20	-35.56	peak
3	4443.453	7.19	34.28	54.25	54.00	41.22	68.20	-26.98	peak
4	8995.123	9.92	36.91	53.60	53.62	46.85	68.20	-21.35	peak
5	11420.000	11.91	37.72	53.09	48.89	45.43	74.00	-28.57	peak
6	17130.000	14.47	43.07	52.83	49.28	53.99	68.20	-14.21	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

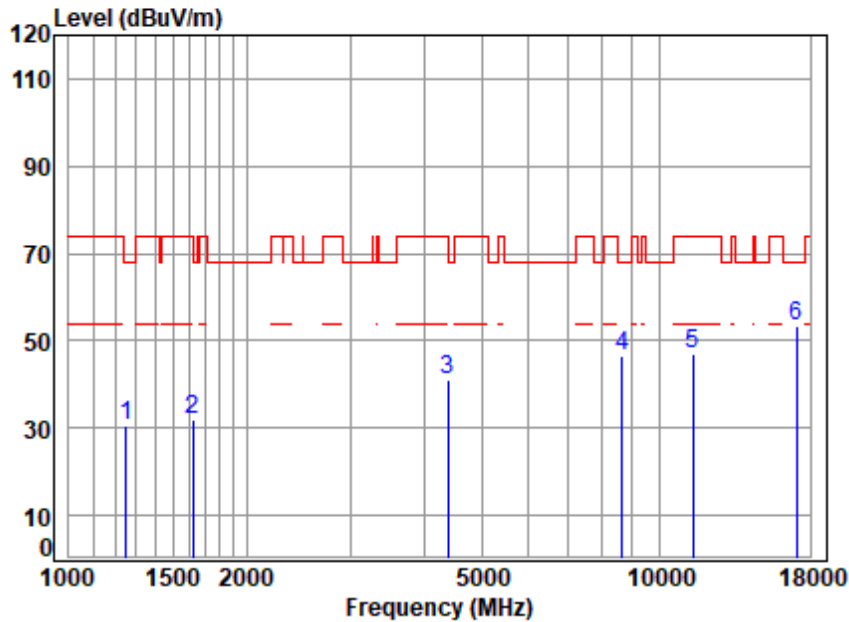

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5690 TX RSE
Note : 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	54.70	56.39	30.52	68.20	-37.68	peak
2	1620.431	4.21	26.60	54.81	56.03	32.03	74.00	-41.97	peak
3	4379.699	7.11	34.64	54.26	53.77	41.26	74.00	-32.74	peak
4	8663.404	9.66	36.90	53.44	53.22	46.34	68.20	-21.86	peak
5	11380.000	11.89	37.72	53.08	50.30	46.83	74.00	-27.17	peak
6	p17070.000	14.40	43.10	52.86	48.55	53.19	68.20	-15.01	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 129 of 715

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

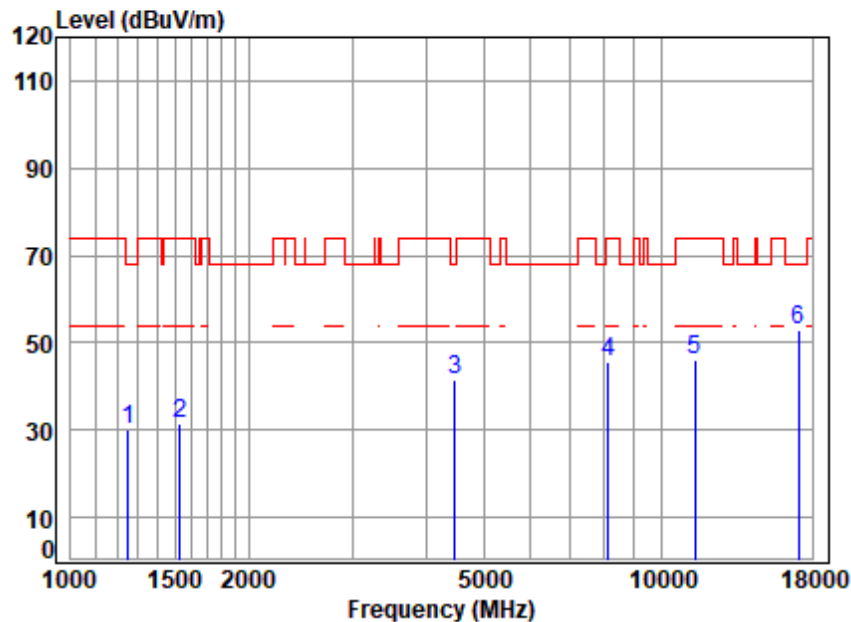

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5690 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	3.75	25.08	54.70	56.10	30.23	68.20	-37.97	peak
2	1529.414	4.08	26.92	54.78	55.38	31.60	74.00	-42.40	peak
3	4469.214	7.22	33.97	54.25	54.50	41.44	68.20	-26.76	peak
4	8129.664	9.16	36.50	53.17	52.94	45.43	74.00	-28.57	peak
5	11380.000	11.89	37.72	53.08	49.45	45.98	74.00	-28.02	peak
6	p17070.000	14.40	43.10	52.86	48.12	52.76	68.20	-15.44	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

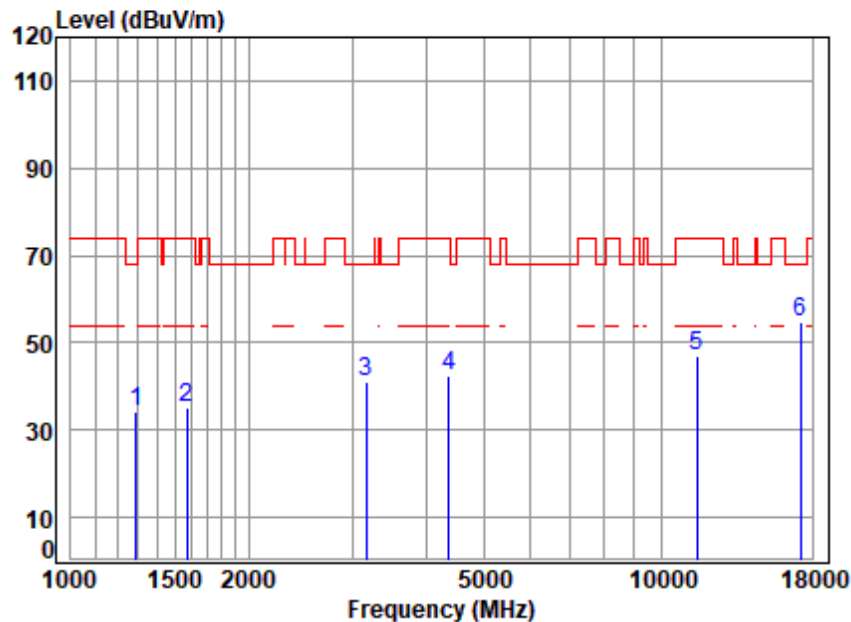


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5745 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	67.20	34.44	68.20	-33.76	peak
2	1574.265	4.15	26.90	61.51	65.51	35.05	74.00	-38.95	peak
3	3168.500	6.23	32.65	61.62	63.91	41.17	68.20	-27.03	peak
4	4367.058	7.10	34.54	61.21	62.18	42.61	74.00	-31.39	peak
5	11490.000	11.94	37.79	61.39	58.70	47.04	74.00	-26.96	peak
6	17235.000	14.59	43.03	60.49	57.50	54.63	68.20	-13.57	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

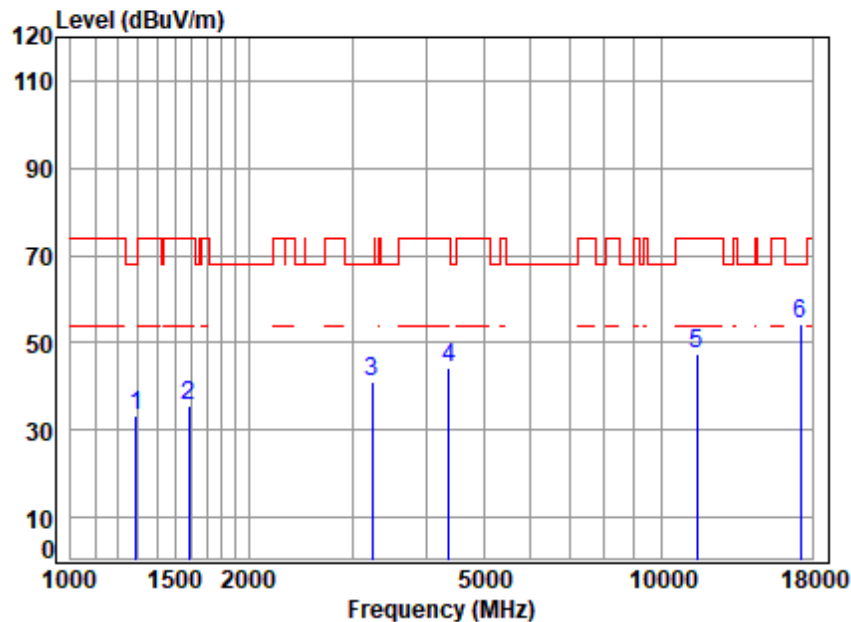


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5745 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.04	33.28	68.20	-34.92	peak
2	1587.975	4.17	26.85	61.51	65.89	35.40	74.00	-38.60	peak
3	3233.260	6.29	32.37	61.60	63.98	41.04	68.20	-27.16	peak
4	4367.058	7.10	34.54	61.21	63.71	44.14	74.00	-29.86	peak
5	11490.000	11.94	37.79	61.39	59.14	47.48	74.00	-26.52	peak
6	p17235.000	14.59	43.03	60.49	57.27	54.40	68.20	-13.80	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

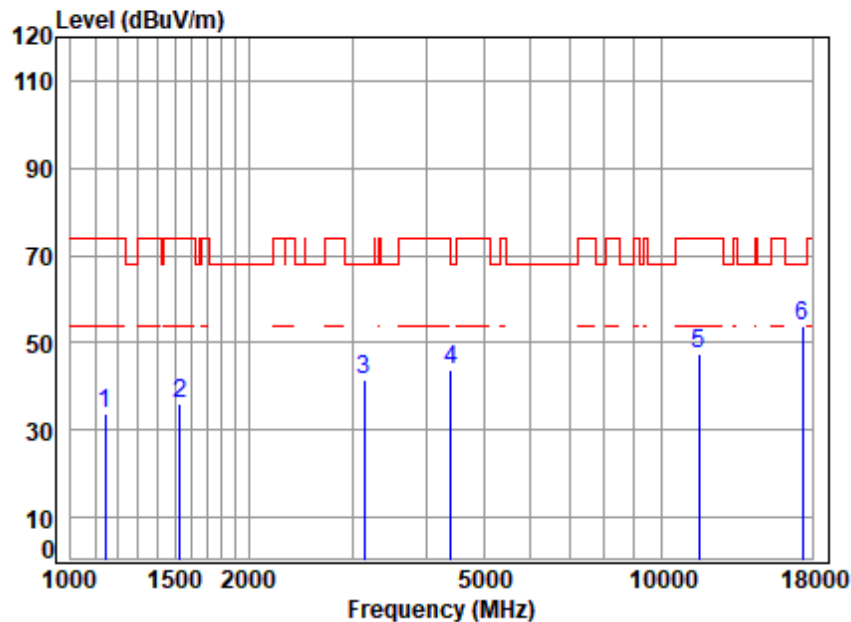


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5785 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	3.61	23.88	61.36	67.60	33.73	74.00	-40.27	peak
2	1529.414	4.08	26.92	61.50	66.49	35.99	74.00	-38.01	peak
3	3141.145	6.20	32.34	61.63	64.46	41.37	68.20	-26.83	peak
4	4405.090	7.14	34.74	61.20	63.11	43.79	68.20	-24.41	peak
5	11570.000	11.95	37.73	61.39	58.97	47.26	74.00	-26.74	peak
6	p17355.000	14.73	43.26	60.42	56.06	53.63	68.20	-14.57	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

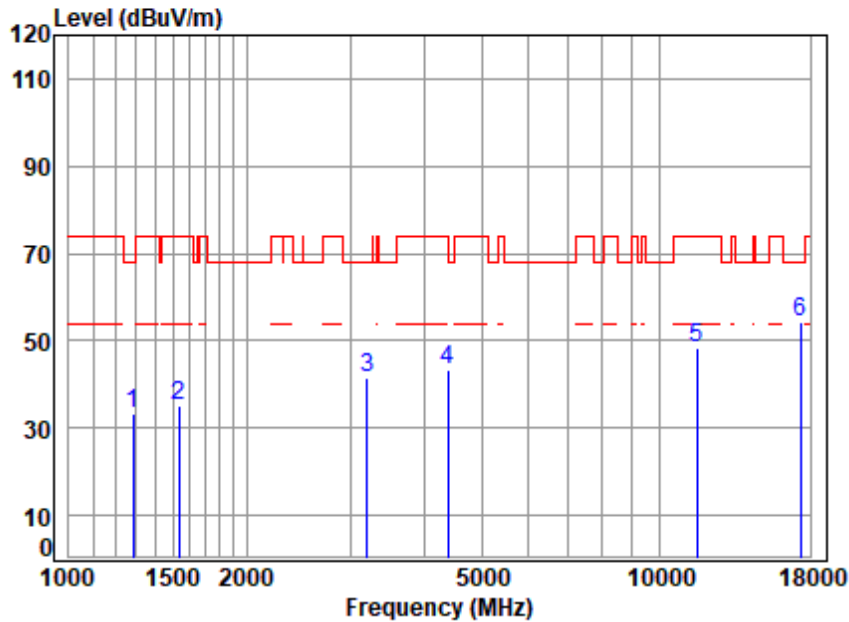


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5785 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	65.86	33.11	68.20	-35.09	peak
2	1538.281	4.10	26.95	61.50	65.60	35.15	74.00	-38.85	peak
3	3196.094	6.25	32.87	61.61	63.85	41.36	68.20	-26.84	peak
4	4379.699	7.11	34.64	61.21	62.97	43.51	74.00	-30.49	peak
5	11570.000	11.95	37.73	61.39	60.00	48.29	74.00	-25.71	peak
6	p17355.000	14.73	43.26	60.42	56.70	54.27	68.20	-13.93	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

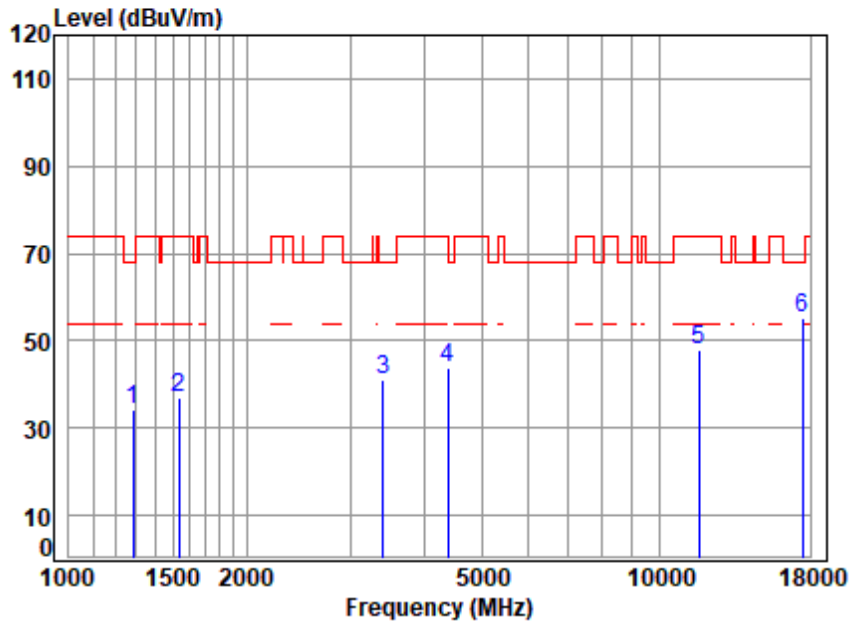


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5825 TX RSE
 Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	66.93	34.18	68.20	-34.02	peak
2	1538.281	4.10	26.95	61.50	67.24	36.79	74.00	-37.21	peak
3	3405.929	6.44	32.33	61.55	63.69	40.91	68.20	-27.29	peak
4	4379.699	7.11	34.64	61.21	63.04	43.58	74.00	-30.42	peak
5	11650.000	11.95	37.80	61.38	59.33	47.70	74.00	-26.30	peak
6	17475.000	14.86	43.40	60.36	57.46	55.36	68.20	-12.84	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

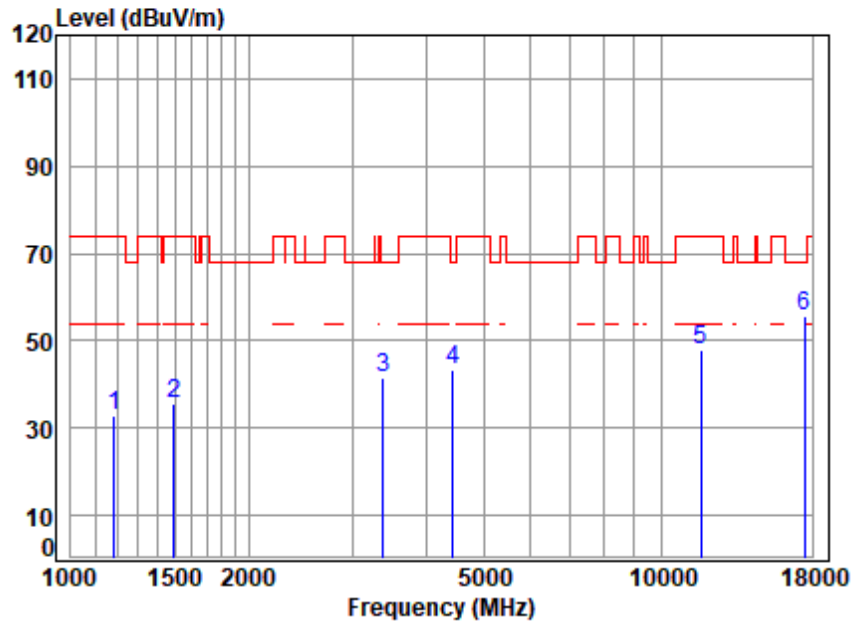


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5825 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.38	66.28	32.82	74.00	-41.18	peak
2	1494.455	4.03	26.64	61.49	66.33	35.51	74.00	-38.49	peak
3	3386.297	6.42	32.32	61.55	64.11	41.30	68.20	-26.90	peak
4	4430.628	7.17	34.43	61.19	62.81	43.22	68.20	-24.98	peak
5	11650.000	11.95	37.80	61.38	59.59	47.96	74.00	-26.04	peak
6	p17475.000	14.86	43.40	60.36	57.89	55.79	68.20	-12.41	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

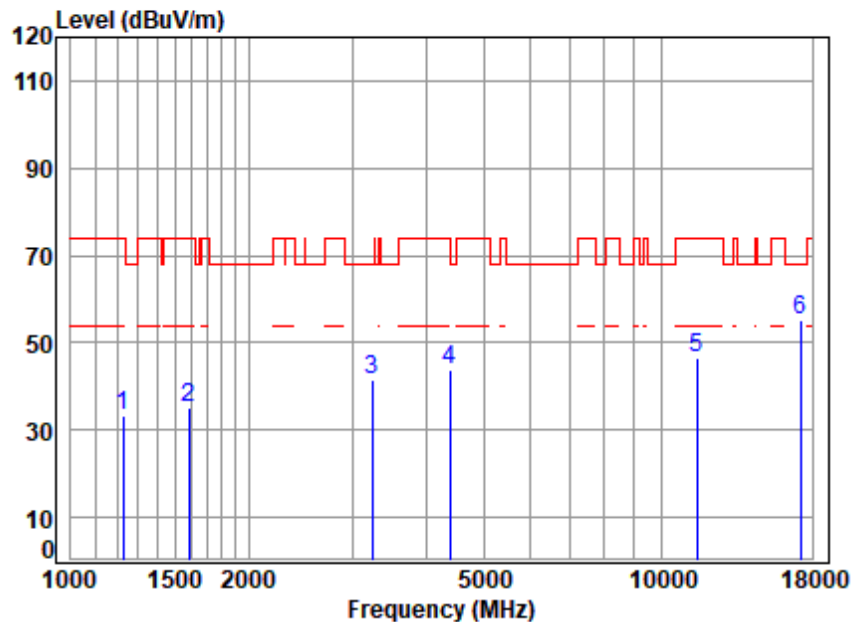


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	3.72	24.79	61.39	66.08	33.20	74.00	-40.80	peak
2	1587.975	4.17	26.85	61.51	65.56	35.07	74.00	-38.93	peak
3	3242.619	6.30	32.22	61.60	64.71	41.63	68.20	-26.57	peak
4	4392.376	7.13	34.74	61.20	63.29	43.96	74.00	-30.04	peak
5	11490.000	11.94	37.79	61.39	58.35	46.69	74.00	-27.31	peak
6	17235.000	14.59	43.03	60.49	58.17	55.30	68.20	-12.90	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

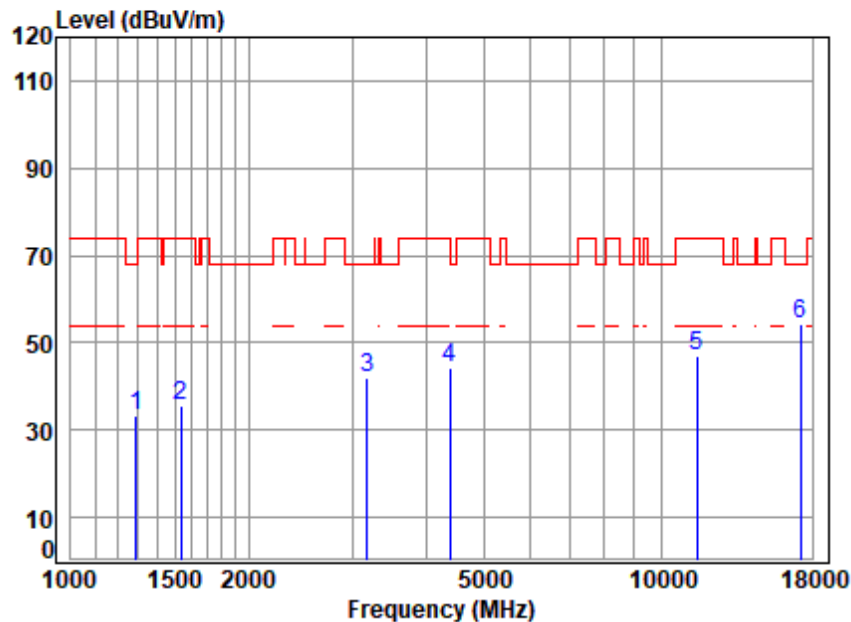


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	65.92	33.16	68.20	-35.04	peak
2	1533.841	4.09	26.94	61.50	65.94	35.47	74.00	-38.53	peak
3	3177.672	6.24	32.72	61.62	64.53	41.87	68.20	-26.33	peak
4	4392.376	7.13	34.74	61.20	63.71	44.38	74.00	-29.62	peak
5	11490.000	11.94	37.79	61.39	58.81	47.15	74.00	-26.85	peak
6	p17235.000	14.59	43.03	60.49	57.04	54.17	68.20	-14.03	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

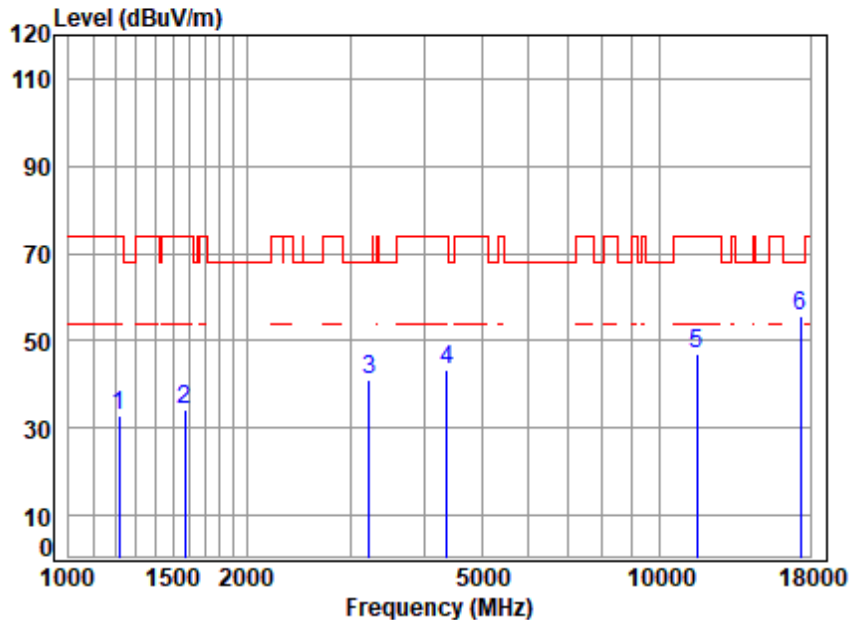


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	3.71	24.64	61.39	66.04	33.00	74.00	-41.00	peak
2	1574.265	4.15	26.90	61.51	64.83	34.37	74.00	-39.63	peak
3	3223.928	6.28	32.52	61.60	63.91	41.11	68.20	-27.09	peak
4	4367.058	7.10	34.54	61.21	62.99	43.42	74.00	-30.58	peak
5	11570.000	11.95	37.73	61.39	58.80	47.09	74.00	-26.91	peak
6	p17355.000	14.73	43.26	60.42	58.01	55.58	68.20	-12.62	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

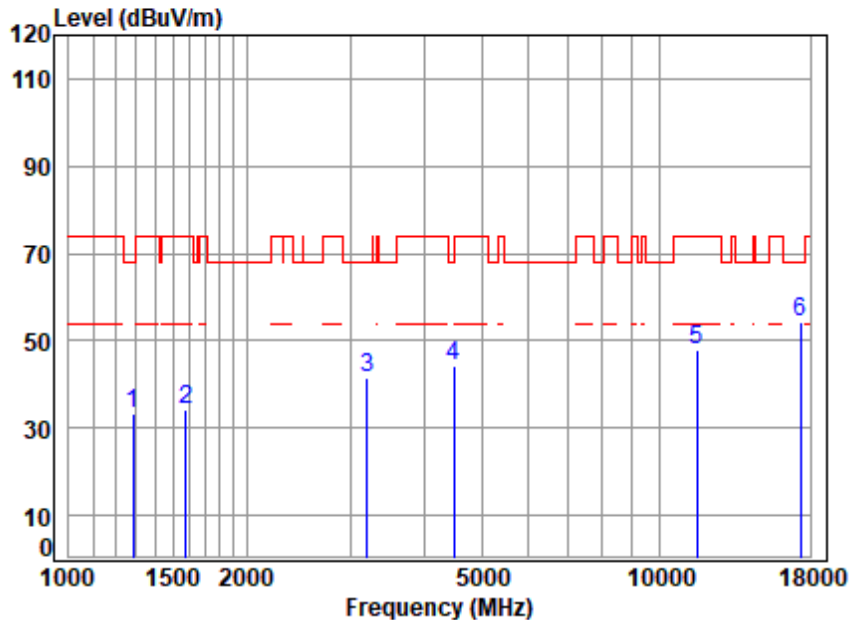


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	66.22	33.47	68.20	-34.73	peak
2	1578.822	4.16	26.88	61.51	64.85	34.38	74.00	-39.62	peak
3	3196.094	6.25	32.87	61.61	64.17	41.68	68.20	-26.52	peak
4	4482.150	7.23	33.81	61.16	64.18	44.06	68.20	-24.14	peak
5	11570.000	11.95	37.73	61.39	59.48	47.77	74.00	-26.23	peak
6	p17355.000	14.73	43.26	60.42	56.67	54.24	68.20	-13.96	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

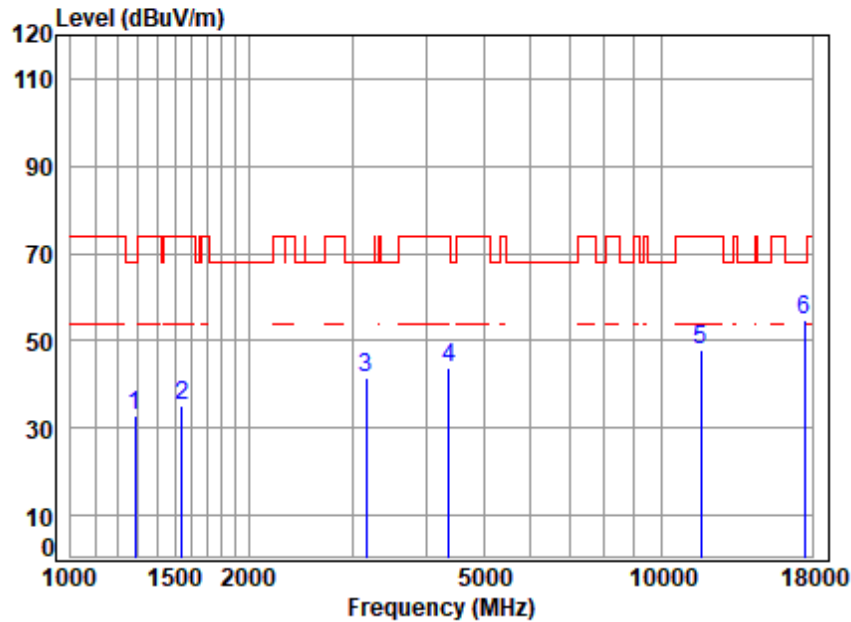


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5825 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	65.76	33.01	68.20	-35.19	peak
2	1542.733	4.10	26.97	61.50	65.61	35.18	74.00	-38.82	peak
3	3168.500	6.23	32.65	61.62	64.38	41.64	68.20	-26.56	peak
4	4367.058	7.10	34.54	61.21	63.59	44.02	74.00	-29.98	peak
5	11650.000	11.95	37.80	61.38	59.42	47.79	74.00	-26.21	peak
6	p17475.000	14.86	43.40	60.36	56.65	54.55	68.20	-13.65	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

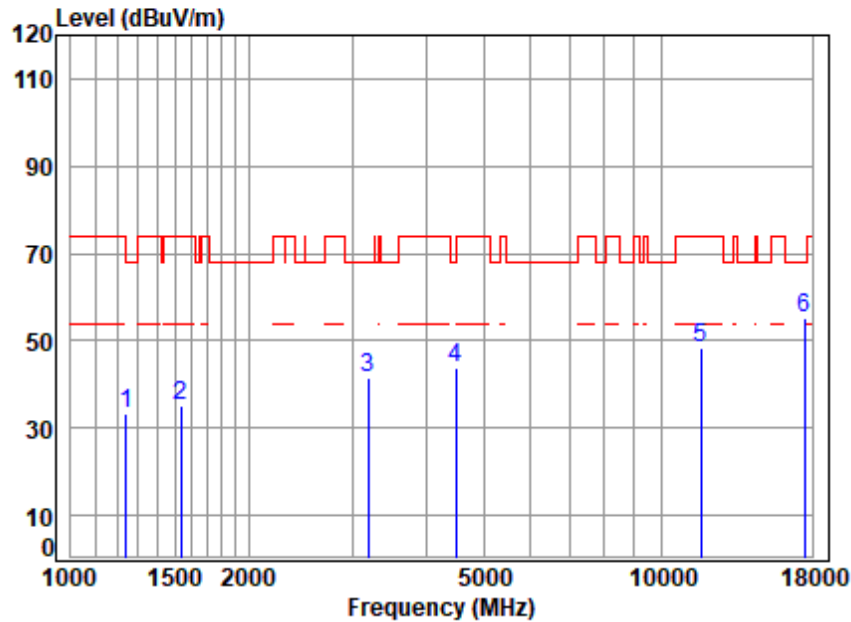


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5825 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	3.74	24.99	61.40	65.95	33.28	68.20	-34.92	peak
2	1533.841	4.09	26.94	61.50	65.64	35.17	74.00	-38.83	peak
3	3186.869	6.25	32.79	61.62	64.15	41.57	68.20	-26.63	peak
4	4495.125	7.24	33.66	61.16	63.91	43.65	68.20	-24.55	peak
5	11650.000	11.95	37.80	61.38	59.86	48.23	74.00	-25.77	peak
6	p17475.000	14.86	43.40	60.36	57.39	55.29	68.20	-12.91	peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

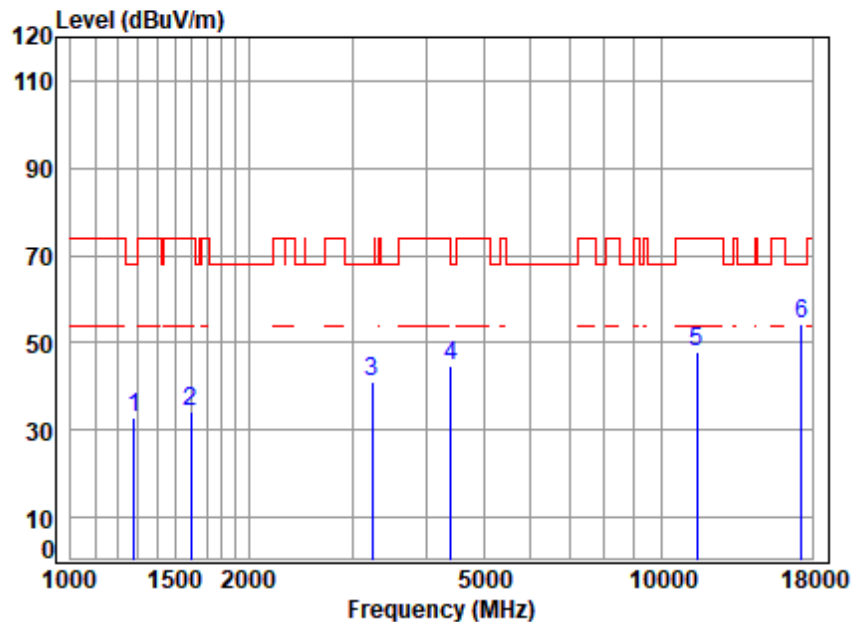


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5755 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.41	65.74	33.03	68.20	-35.17	peak
2	1597.181	4.18	26.81	61.52	64.93	34.40	74.00	-39.60	peak
3	3242.619	6.30	32.22	61.60	64.11	41.03	68.20	-27.17	peak
4	4405.090	7.14	34.74	61.20	64.18	44.86	68.20	-23.34	peak
5	11510.000	11.95	37.79	61.39	59.36	47.71	74.00	-26.29	peak
6	p17265.000	14.62	43.06	60.47	57.16	54.37	68.20	-13.83	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

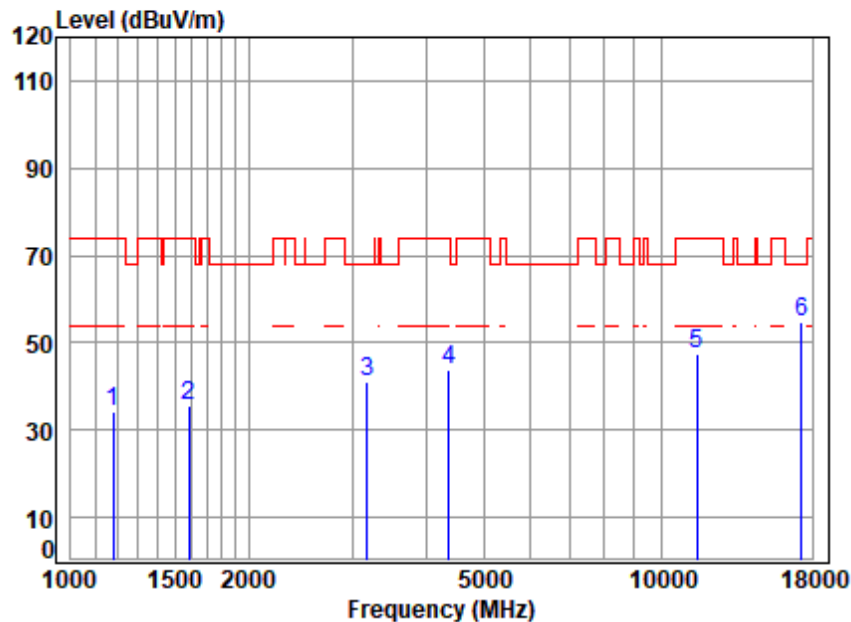

Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5755 TX RSE
 Note : 5G WIFI 11N40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1179.100	3.65	24.19	61.38	67.83	34.29	74.00	-39.71	peak
2	1583.392	4.16	26.87	61.51	66.26	35.78	74.00	-38.22	peak
3	3177.672	6.24	32.72	61.62	63.70	41.04	68.20	-27.16	peak
4	4367.058	7.10	34.54	61.21	63.25	43.68	74.00	-30.32	peak
5	11510.000	11.95	37.79	61.39	59.23	47.58	74.00	-26.42	peak
6	17265.000	14.62	43.06	60.47	57.63	54.84	68.20	-13.36	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

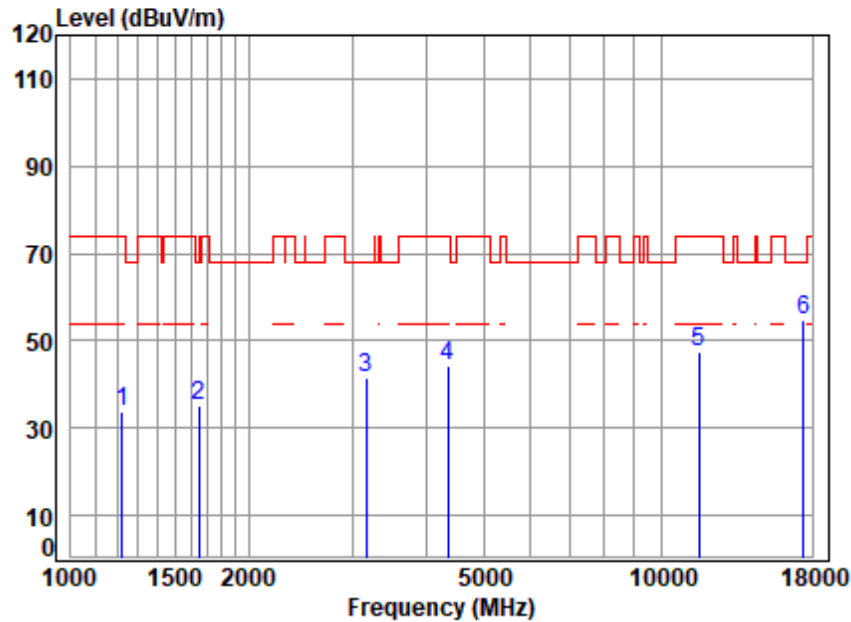


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1220.714	3.71	24.69	61.39	66.93	33.94	74.00	-40.06	peak
2	1648.778	4.25	26.31	61.53	66.20	35.23	68.20	-32.97	peak
3	3168.500	6.23	32.65	61.62	64.24	41.50	68.20	-26.70	peak
4	4354.454	7.08	34.44	61.22	64.15	44.45	74.00	-29.55	peak
5	11590.000	11.95	37.71	61.39	59.37	47.64	74.00	-26.36	peak
6	p17385.000	14.76	43.35	60.40	56.96	54.67	68.20	-13.53	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

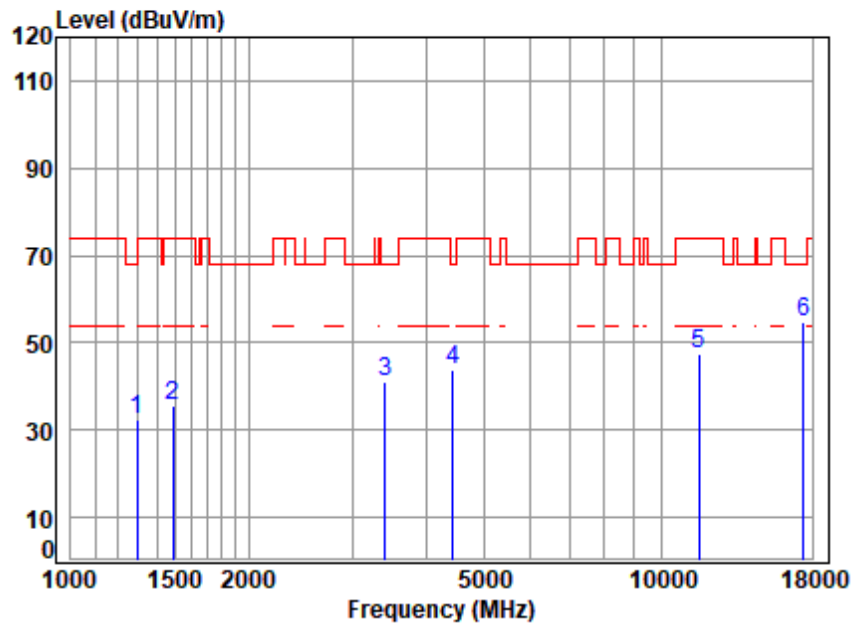


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	65.22	32.44	68.20	-35.76	peak
2	1490.142	4.03	26.52	61.48	66.57	35.64	74.00	-38.36	peak
3	3405.929	6.44	32.33	61.55	63.74	40.96	68.20	-27.24	peak
4	4443.453	7.19	34.28	61.18	63.63	43.92	68.20	-24.28	peak
5	11590.000	11.95	37.71	61.39	59.11	47.38	74.00	-26.62	peak
6	p17385.000	14.76	43.35	60.40	56.93	54.64	68.20	-13.56	peak



Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

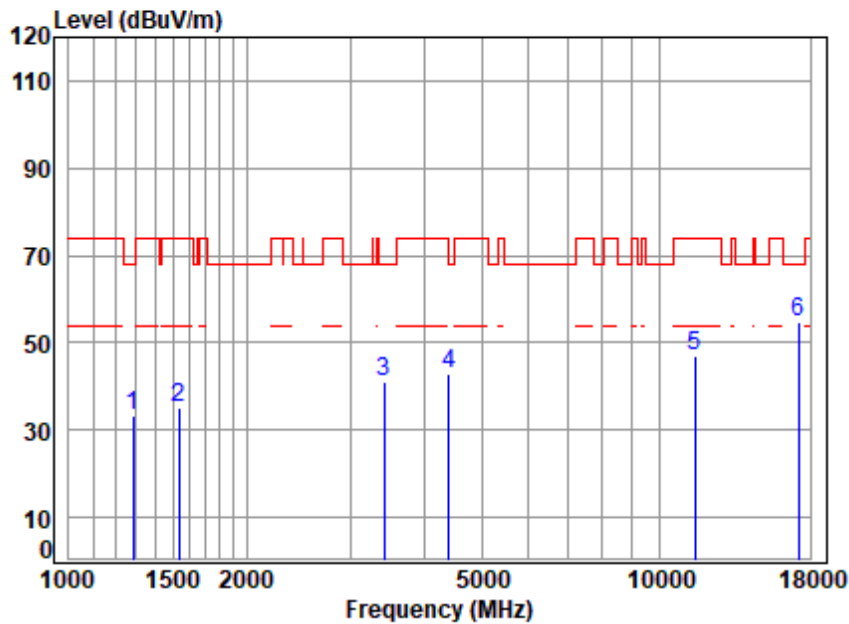


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5745 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	66.17	33.42	68.20	-34.78	peak
2	1538.281	4.10	26.95	61.50	65.46	35.01	74.00	-38.99	peak
3	3415.787	6.45	32.21	61.54	64.00	41.12	68.20	-27.08	peak
4	4405.090	7.14	34.74	61.20	62.18	42.86	68.20	-25.34	peak
5	11490.000	11.94	37.79	61.39	58.81	47.15	74.00	-26.85	peak
6	p17235.000	14.59	43.03	60.49	57.84	54.97	68.20	-13.23	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

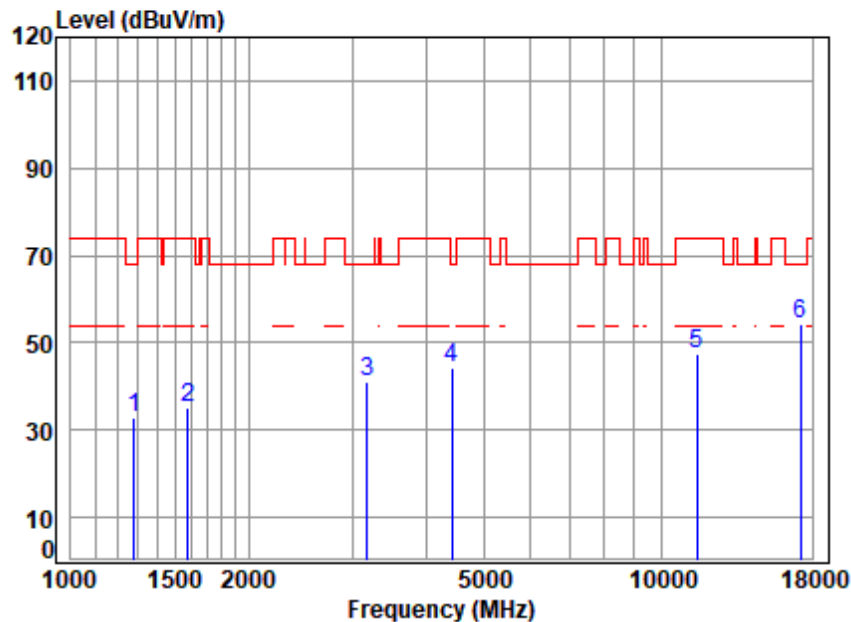


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5745 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.41	65.57	32.86	68.20	-35.34	peak
2	1578.822	4.16	26.88	61.51	65.80	35.33	74.00	-38.67	peak
3	3177.672	6.24	32.72	61.62	63.86	41.20	68.20	-27.00	peak
4	4417.841	7.16	34.59	61.19	63.55	44.11	68.20	-24.09	peak
5	11490.000	11.94	37.79	61.39	59.29	47.63	74.00	-26.37	peak
6	p17235.000	14.59	43.03	60.49	57.39	54.52	68.20	-13.68	peak



Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: middle

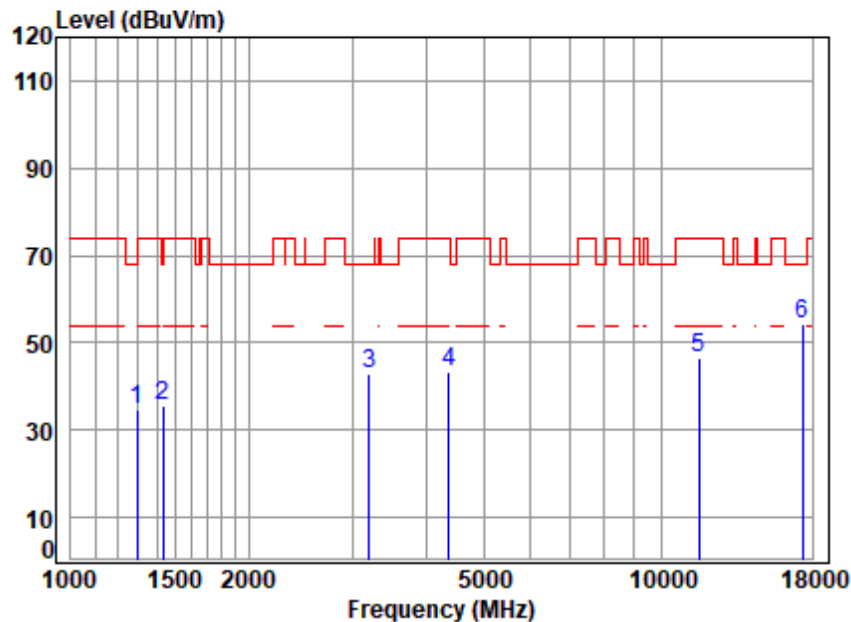

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5785 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	3.80	24.84	61.42	67.35	34.57	68.20	-33.63	peak
2	1435.189	3.97	25.16	61.47	67.93	35.59	74.00	-38.41	peak
3	3205.345	6.26	32.81	61.61	65.25	42.71	68.20	-25.49	peak
4	4367.058	7.10	34.54	61.21	62.73	43.16	74.00	-30.84	peak
5	11570.000	11.95	37.73	61.39	58.21	46.50	74.00	-27.50	peak
6	p17355.000	14.73	43.26	60.42	56.94	54.51	68.20	-13.69	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 149 of 715

Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

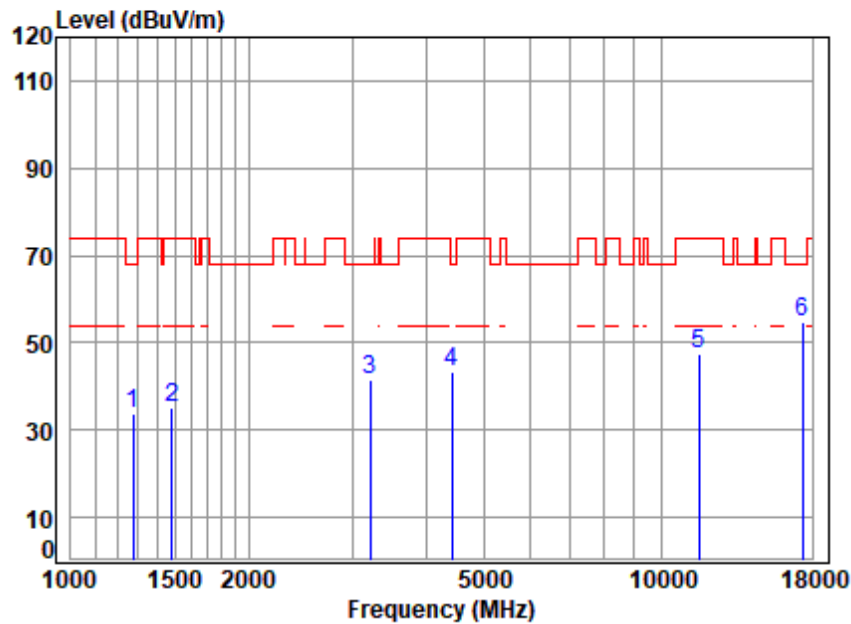

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5785 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	3.78	24.95	61.41	66.42	33.74	68.20	-34.46	peak
2	1485.841	4.02	26.40	61.48	66.29	35.23	74.00	-38.77	peak
3	3214.623	6.27	32.67	61.61	64.33	41.66	68.20	-26.54	peak
4	4417.841	7.16	34.59	61.19	62.69	43.25	68.20	-24.95	peak
5	11570.000	11.95	37.73	61.39	59.38	47.67	74.00	-26.33	peak
6	p17355.000	14.73	43.26	60.42	56.99	54.56	68.20	-13.64	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

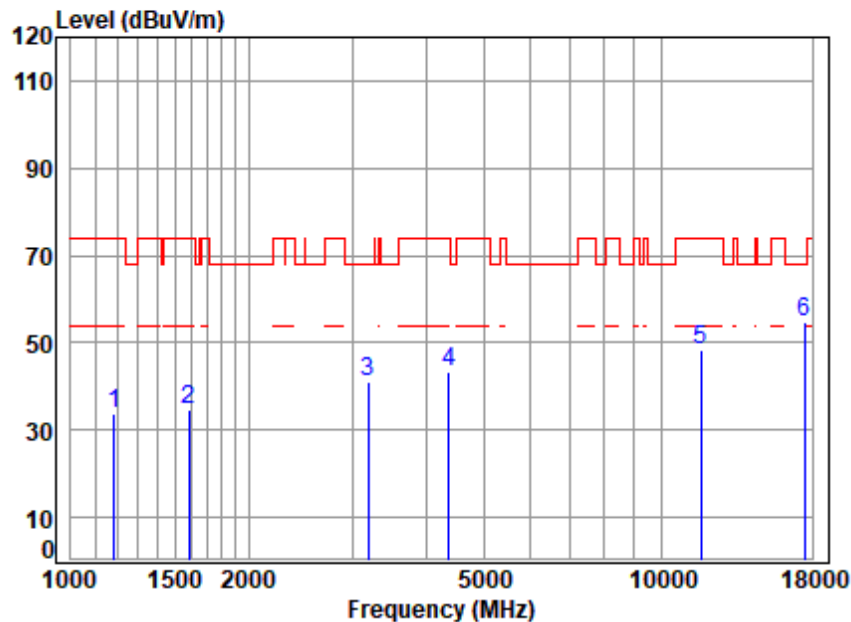


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5825 TX RSE
Note : 5G WIFI 11AX20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	3.66	24.26	61.38	67.08	33.62	74.00	-40.38	peak
2	1583.392	4.16	26.87	61.51	65.35	34.87	74.00	-39.13	peak
3	3186.869	6.25	32.79	61.62	63.66	41.08	68.20	-27.12	peak
4	4367.058	7.10	34.54	61.21	63.06	43.49	74.00	-30.51	peak
5	11650.000	11.95	37.80	61.38	59.84	48.21	74.00	-25.79	peak
6	p17475.000	14.86	43.40	60.36	56.91	54.81	68.20	-13.39	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

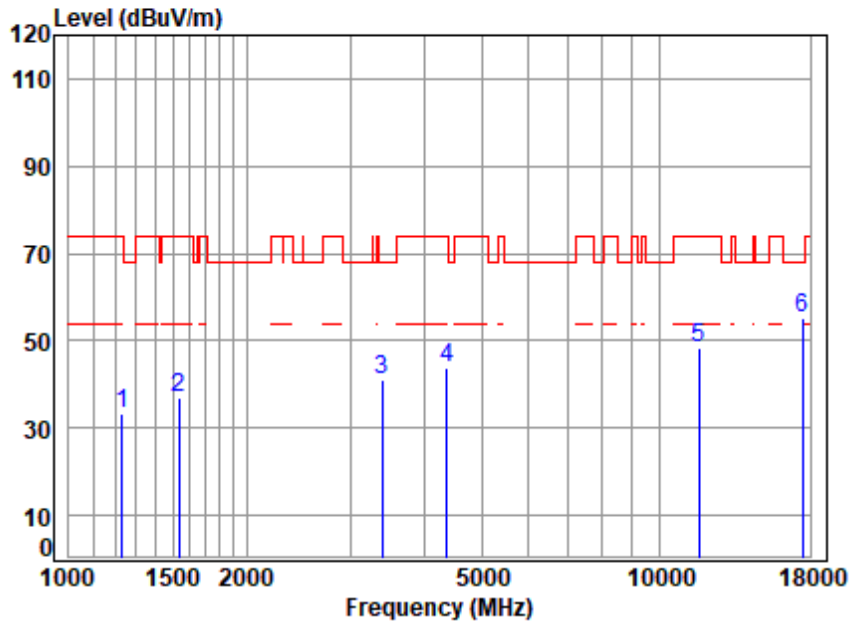


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5825 TX RSE
Note : 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1231.345	3.72	24.84	61.40	65.98	33.14	74.00	-40.86	peak
2	1533.841	4.09	26.94	61.50	67.34	36.87	74.00	-37.13	peak
3	3396.098	6.43	32.38	61.55	64.01	41.27	68.20	-26.93	peak
4	4367.058	7.10	34.54	61.21	63.18	43.61	74.00	-30.39	peak
5	11650.000	11.95	37.80	61.38	60.06	48.43	74.00	-25.57	peak
6	p17475.000	14.86	43.40	60.36	57.40	55.30	68.20	-12.90	peak



Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

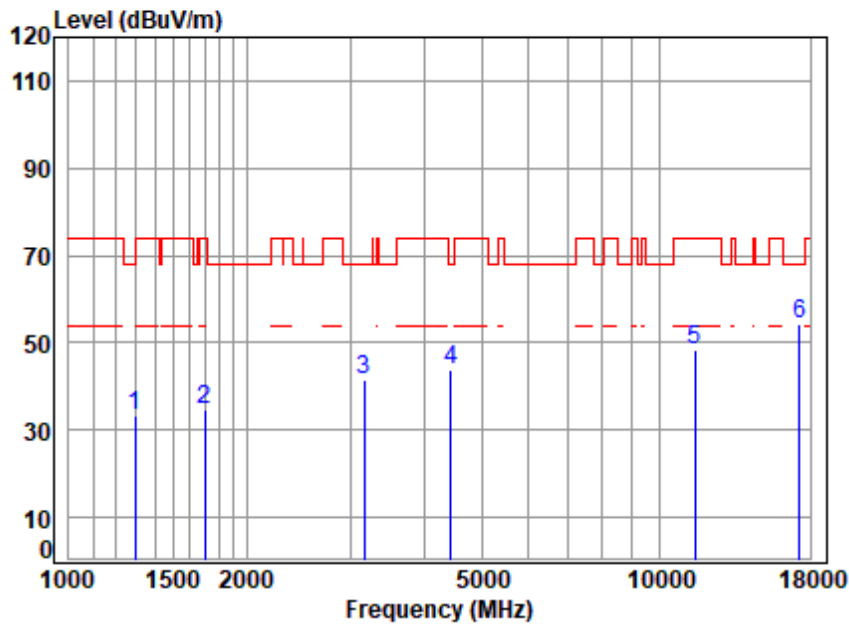


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5755 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	3.81	24.82	61.42	65.90	33.11	68.20	-35.09	peak
2	1697.129	4.32	26.21	61.54	65.63	34.62	74.00	-39.38	peak
3	3168.500	6.23	32.65	61.62	64.47	41.73	68.20	-26.47	peak
4	4430.628	7.17	34.43	61.19	63.36	43.77	68.20	-24.43	peak
5	11510.000	11.95	37.79	61.39	60.14	48.49	74.00	-25.51	peak
6	p17265.000	14.62	43.06	60.47	57.19	54.40	68.20	-13.80	peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

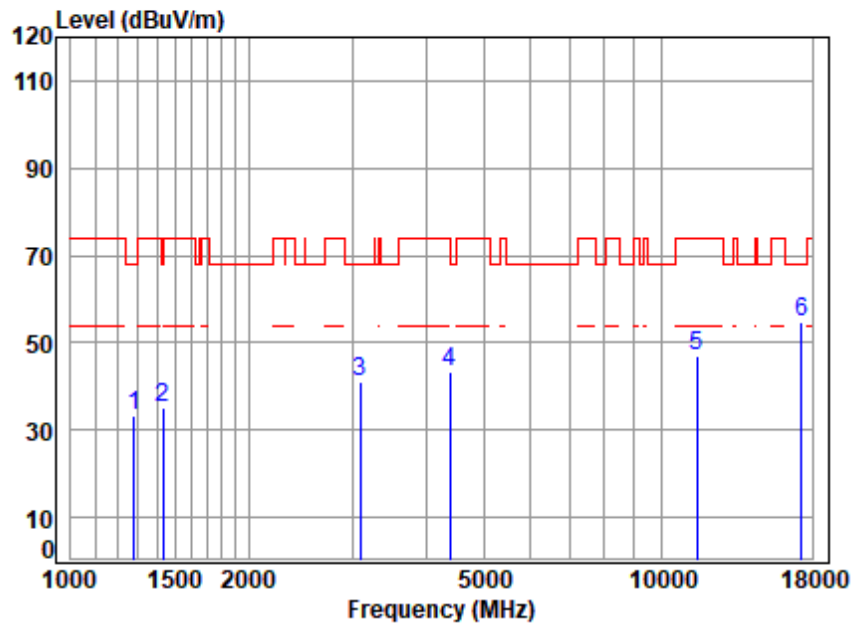

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5755 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	3.78	24.93	61.41	66.20	33.50	68.20	-34.70	peak
2	1431.047	3.96	25.10	61.47	67.33	34.92	68.20	-33.28	peak
3	3096.075	6.16	31.49	61.65	65.02	41.02	68.20	-27.18	peak
4	4379.699	7.11	34.64	61.21	62.78	43.32	74.00	-30.68	peak
5	11510.000	11.95	37.79	61.39	58.76	47.11	74.00	-26.89	peak
6	p17265.000	14.62	43.06	60.47	57.41	54.62	68.20	-13.58	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 154 of 715

Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: High

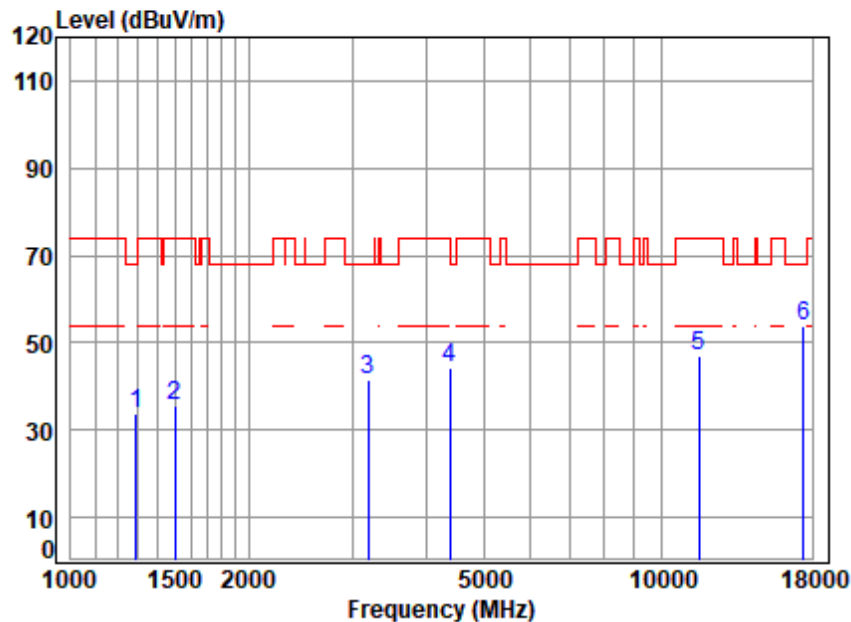

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5795 TX RSE
Note : 5G WIFI 11AX40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	66.68	33.92	68.20	-34.28	peak
2	1498.781	4.04	26.77	61.49	66.26	35.58	74.00	-38.42	peak
3	3186.869	6.25	32.79	61.62	64.06	41.48	68.20	-26.72	peak
4	4379.699	7.11	34.64	61.21	63.58	44.12	74.00	-29.88	peak
5	11590.000	11.95	37.71	61.39	58.73	47.00	74.00	-27.00	peak
6	17385.000	14.76	43.35	60.40	56.21	53.92	68.20	-14.28	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 06; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

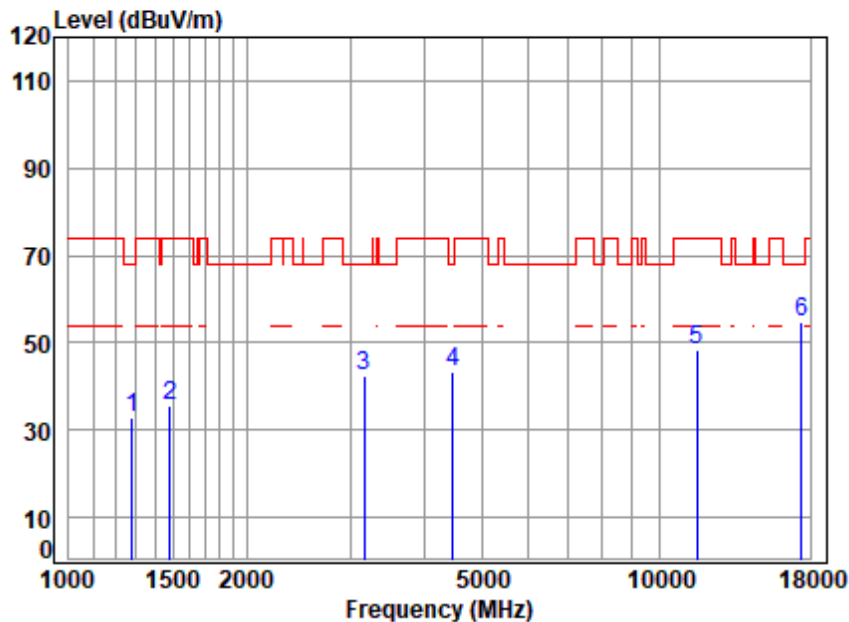

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5795 TX RSE
Note : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	3.79	24.91	61.41	65.71	33.00	68.20	-35.20	peak
2	1485.841	4.02	26.40	61.48	66.43	35.37	74.00	-38.63	peak
3	3168.500	6.23	32.65	61.62	65.37	42.63	68.20	-25.57	peak
4	4469.214	7.22	33.97	61.17	63.34	43.36	68.20	-24.84	peak
5	11590.000	11.95	37.71	61.39	60.21	48.48	74.00	-25.52	peak
6	p17385.000	14.76	43.35	60.40	57.21	54.92	68.20	-13.28	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 156 of 715

Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: middle

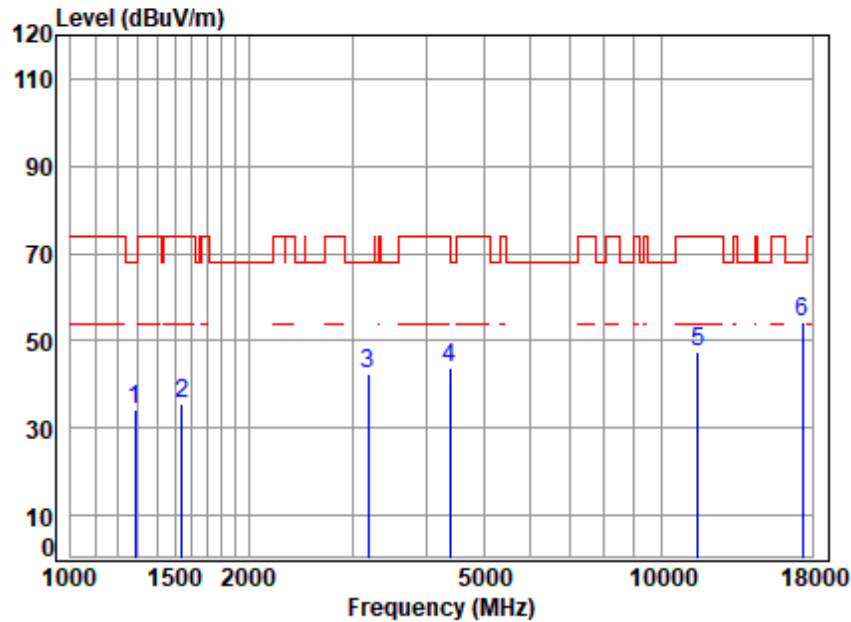

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5775 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	3.79	24.88	61.42	67.05	34.30	68.20	-33.90	peak
2	1542.733	4.10	26.97	61.50	65.96	35.53	74.00	-38.47	peak
3	3186.869	6.25	32.79	61.62	65.19	42.61	68.20	-25.59	peak
4	4392.376	7.13	34.74	61.20	63.01	43.68	74.00	-30.32	peak
5	11550.000	11.95	37.75	61.39	59.34	47.65	74.00	-26.35	peak
6	p17325.000	14.69	43.17	60.44	56.90	54.32	68.20	-13.88	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 157 of 715

Test Mode: 06; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: middle

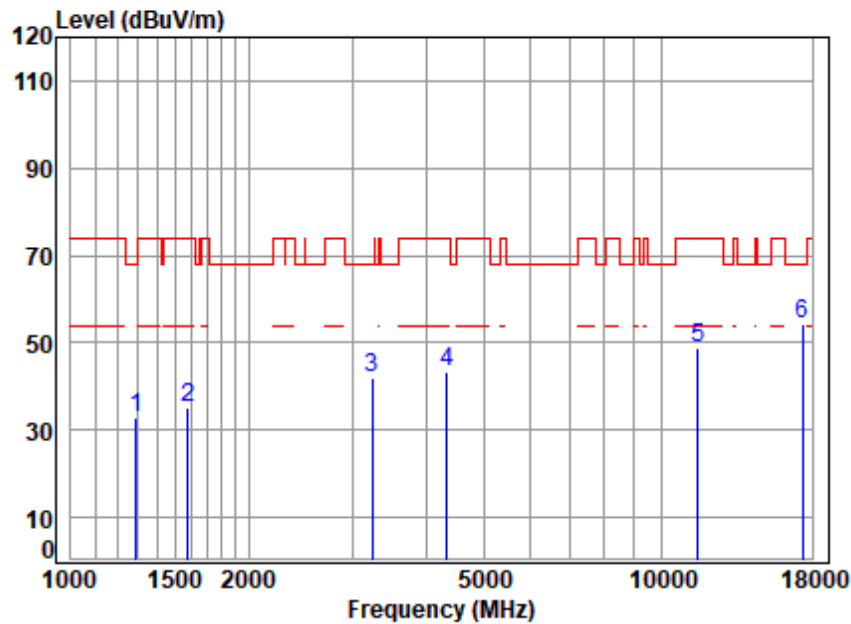

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5775 TX RSE
Note : 5G WIFI 11AX80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	3.80	24.86	61.42	65.79	33.03	68.20	-35.17	peak
2	1578.822	4.16	26.88	61.51	65.41	34.94	74.00	-39.06	peak
3	3242.619	6.30	32.22	61.60	64.89	41.81	68.20	-26.39	peak
4	4329.354	7.05	34.23	61.23	63.52	43.57	74.00	-30.43	peak
5	11550.000	11.95	37.75	61.39	60.70	49.01	74.00	-24.99	peak
6	17325.000	14.69	43.17	60.44	56.90	54.32	68.20	-13.88	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.5 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
 Test Method: ANSI C63.10 (2013) Section 6.10.5
 Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 159 of 715

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C

Humidity: 69.0 % RH

Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.5.3 Test Setup Diagram

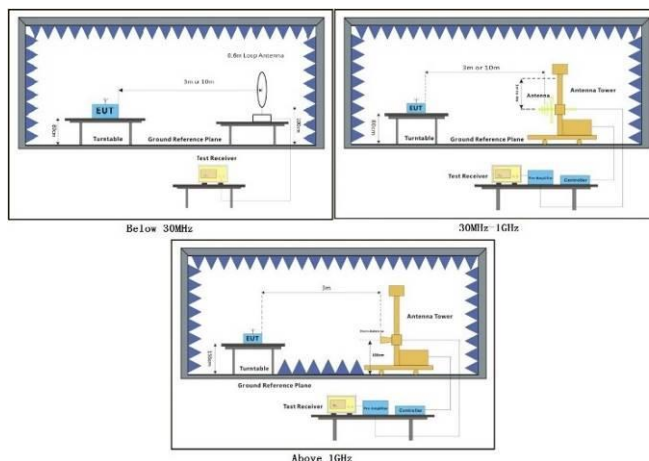

7.5.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

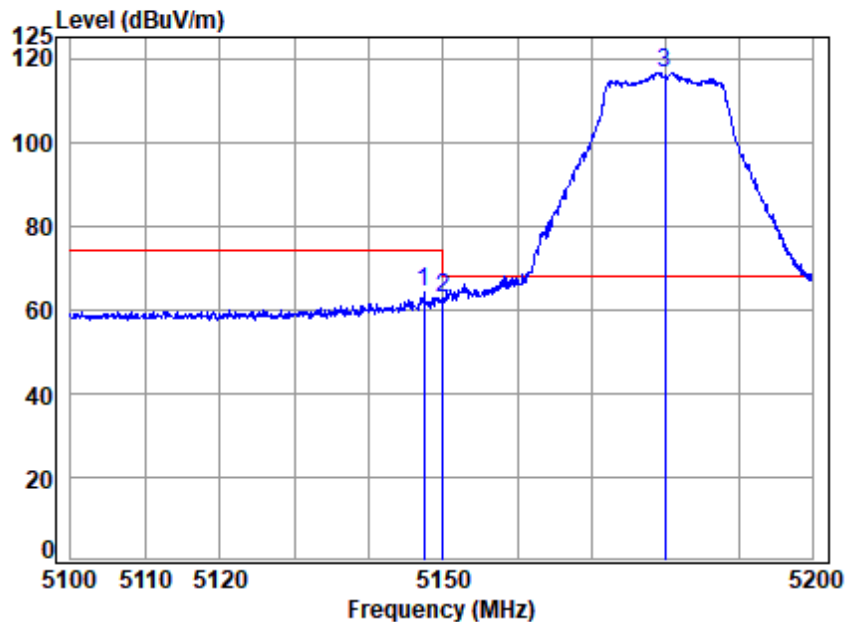


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.458	18.83	33.91	31.28	42.80	64.26	74.00	-9.74	peak
2	5149.980	18.83	33.90	31.28	41.49	62.94	74.00	-11.06	peak
3 p	5180.000	18.88	33.96	31.30	95.06	116.60	68.20	48.40	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

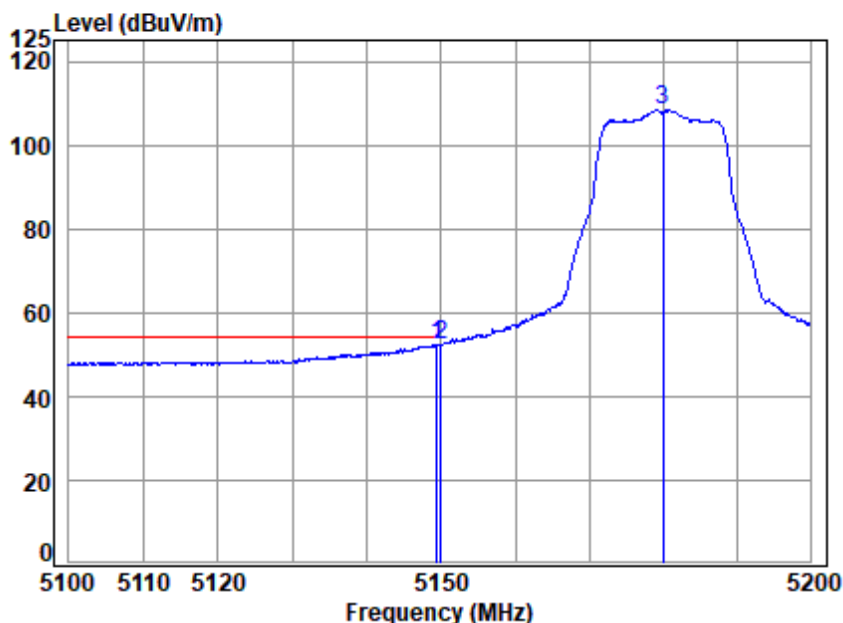


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	18.83	33.90	31.28	30.85	52.30	54.00	-1.70 Average
2 q	5149.980	18.83	33.90	31.28	30.93	52.38	54.00	-1.62 Average
3	5180.000	18.88	33.96	31.30	86.91	108.45	-----	----- Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

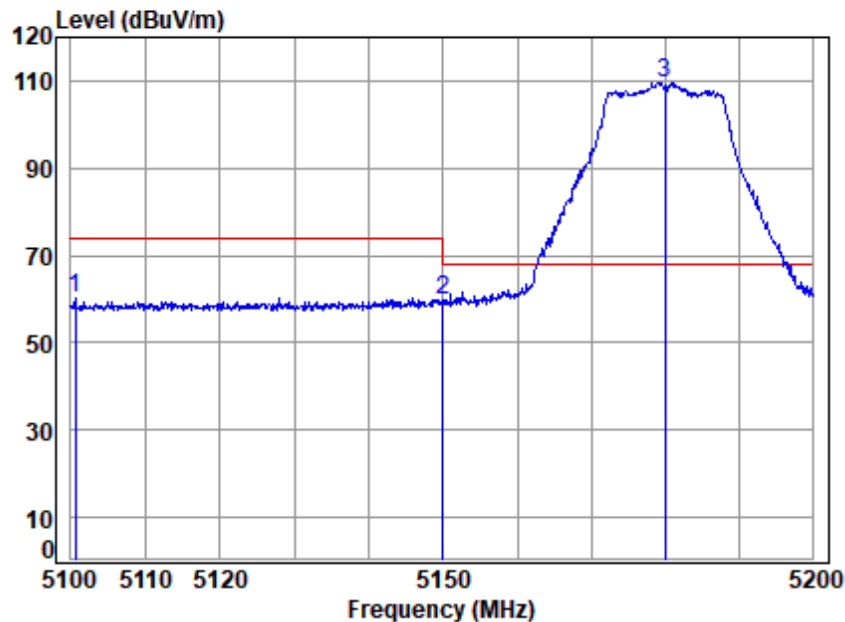


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5100.594	18.76	34.00	31.25	38.67	60.18	74.00	-13.82	Peak
2 5149.980	18.83	33.90	31.28	38.25	59.70	74.00	-14.30	Peak
3 p 5180.000	18.88	33.96	31.30	87.95	109.49	68.20	41.29	Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

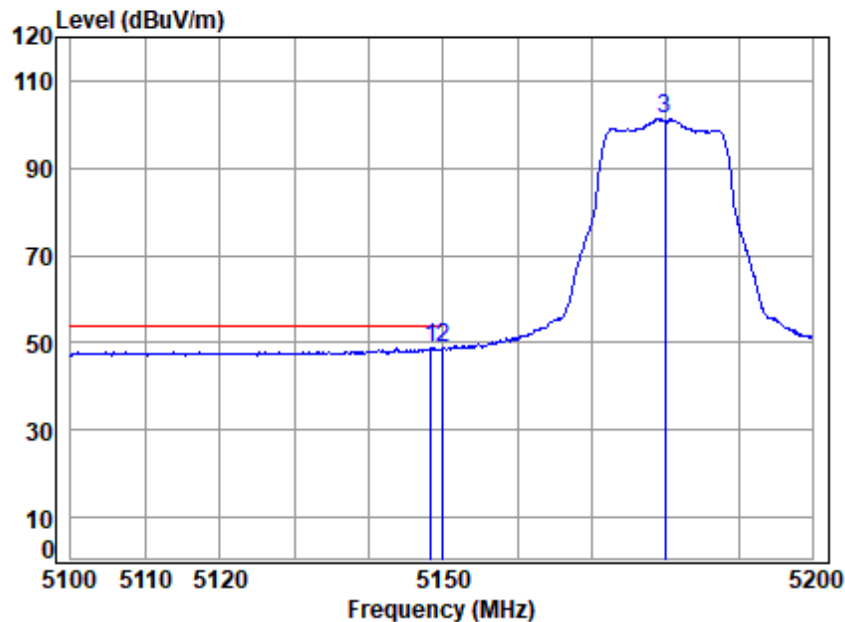


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5148.357	18.83	33.90	31.28	27.45	48.90	54.00	-5.10	Average
2 5149.980	18.83	33.90	31.28	27.39	48.84	54.00	-5.16	Average
3 5180.000	18.88	33.96	31.30	79.87	101.41	-----	-----	Average



Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

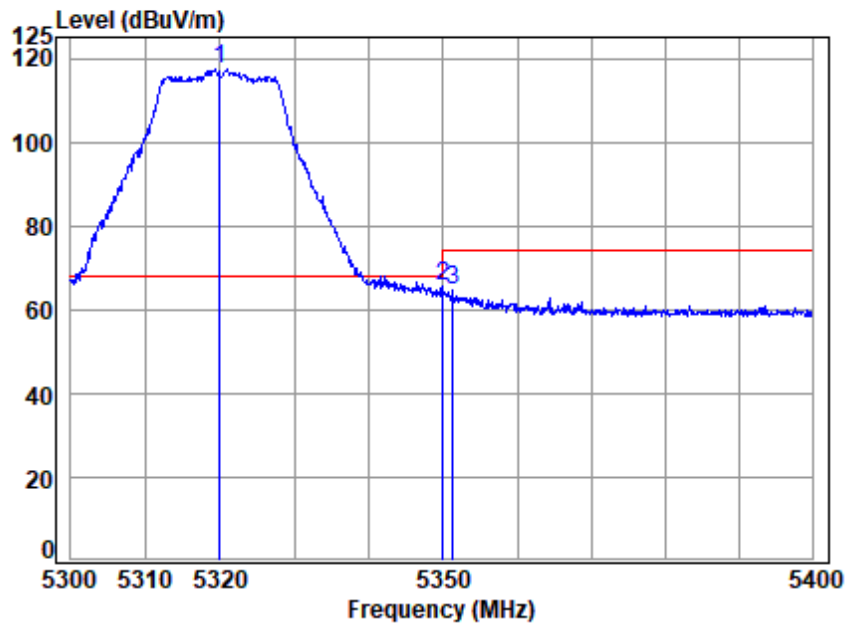

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11A


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5320.000	19.07	34.28	31.37	95.19	117.17	68.20	48.97 peak
2	5350.020	19.11	34.40	31.39	43.25	65.37	74.00	-8.63 peak
3	5351.267	19.11	34.41	31.39	42.59	64.72	74.00	-9.28 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

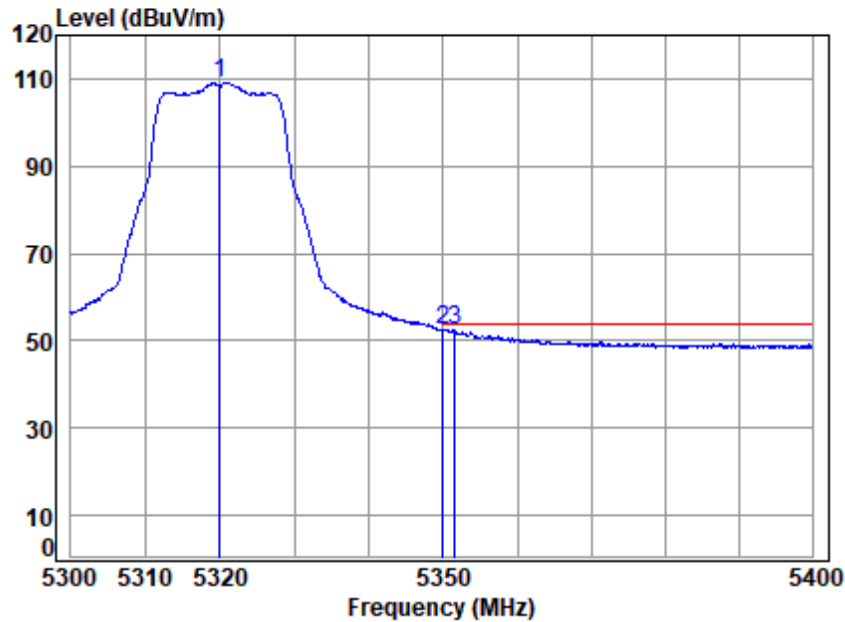

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	19.07	34.28	31.37	87.13	109.11	-----	-----	Average
2 q 5350.020	19.11	34.40	31.39	30.48	52.60	54.00	-1.40	Average
3 5351.566	19.11	34.41	31.39	30.41	52.54	54.00	-1.46	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

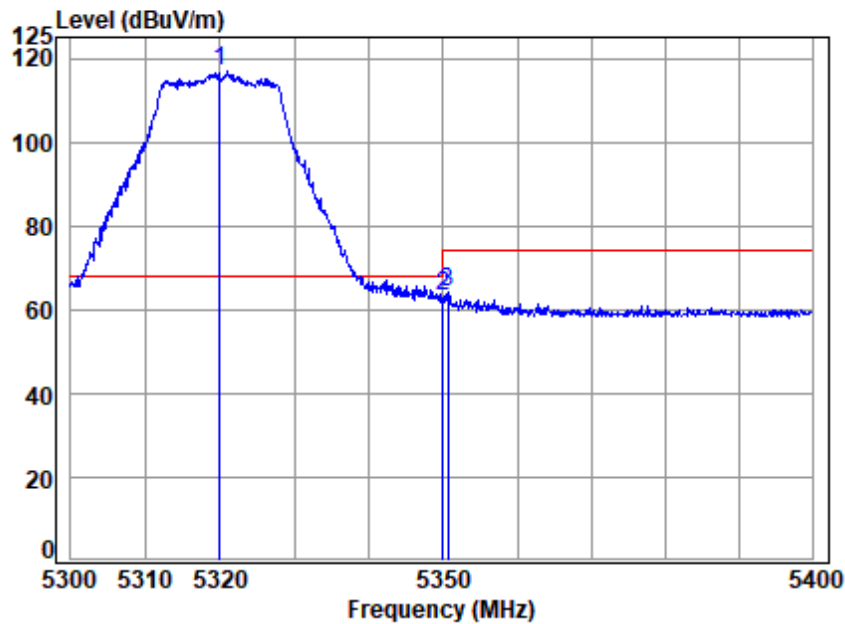


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5320.000	19.07	34.28	31.37	94.72	116.70	68.20	48.50	Peak
2 5350.020	19.11	34.40	31.39	40.86	62.98	74.00	-11.02	Peak
3 5350.667	19.11	34.40	31.39	42.02	64.14	74.00	-9.86	Peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

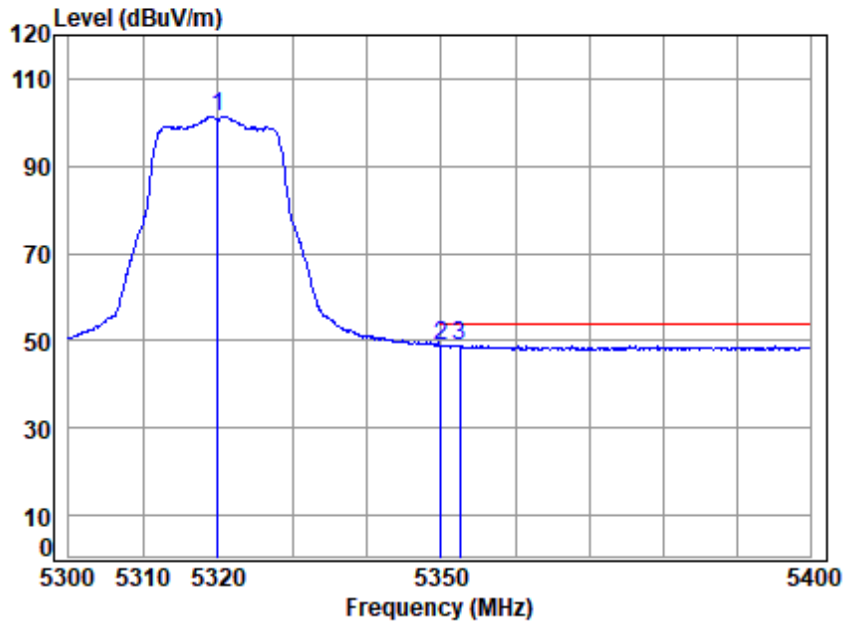

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11A


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	19.07	34.28	31.37	79.46	101.44	-----	-----	Average
2 5350.020	19.11	34.40	31.39	26.77	48.89	54.00	-5.11	Average
3 q 5352.467	19.11	34.41	31.39	26.82	48.95	54.00	-5.05	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

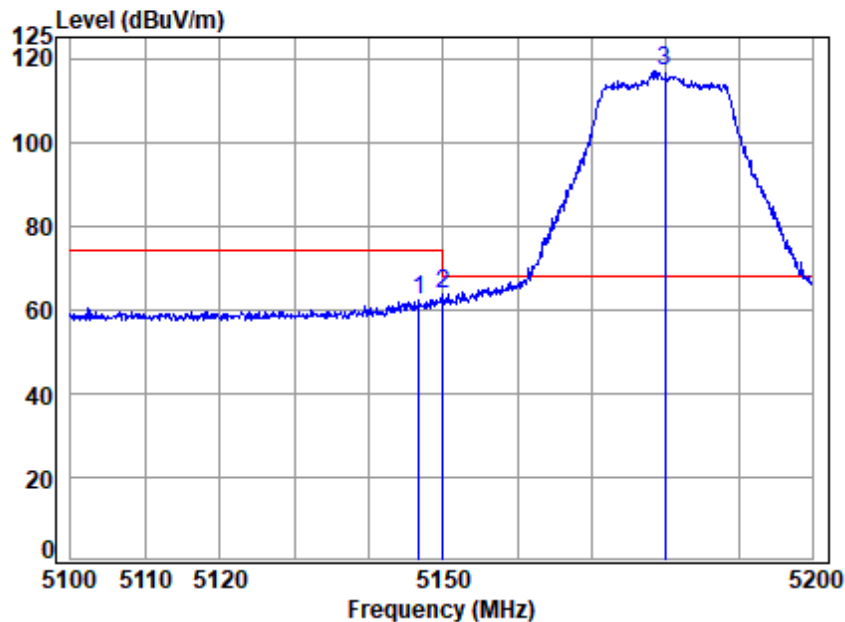


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.758	18.83	33.91	31.28	41.02	62.48	74.00	-11.52	peak
2	5149.980	18.83	33.90	31.28	42.24	63.69	74.00	-10.31	peak
3 p	5180.000	18.88	33.96	31.30	95.62	117.16	68.20	48.96	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

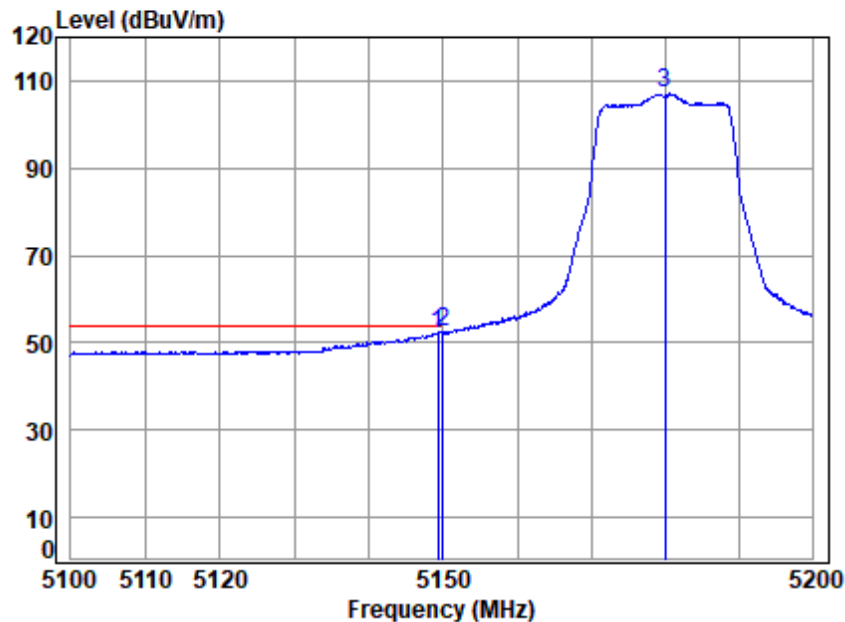


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.257	18.83	33.90	31.28	30.69	52.14	54.00	-1.86	Average
2 q	5149.980	18.83	33.90	31.28	31.04	52.49	54.00	-1.51	Average
3	5180.000	18.88	33.96	31.30	85.63	107.17	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

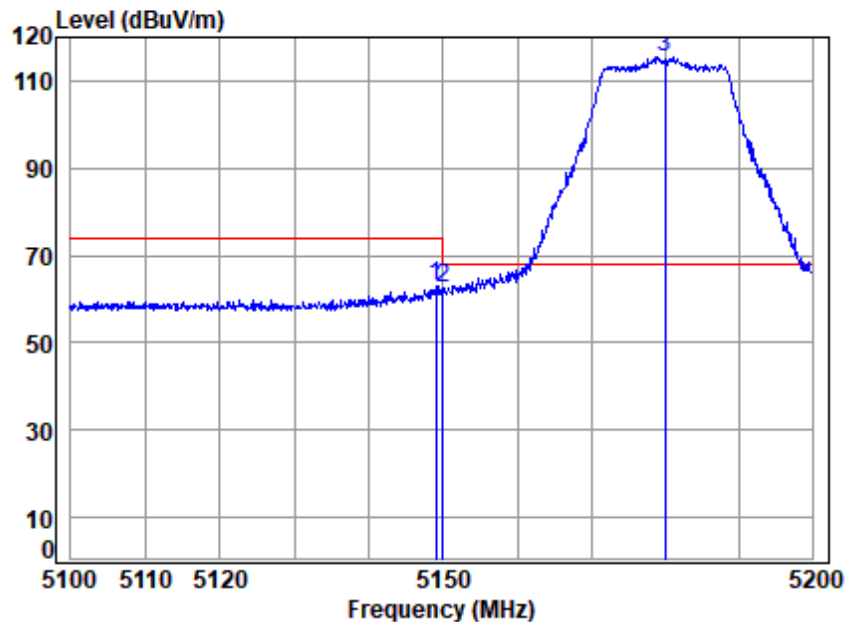


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.958	18.83	33.90	31.28	41.59	63.04	74.00	-10.96 Peak
2	5149.980	18.83	33.90	31.28	41.14	62.59	74.00	-11.41 Peak
3 p	5180.000	18.88	33.96	31.30	93.99	115.53	68.20	47.33 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

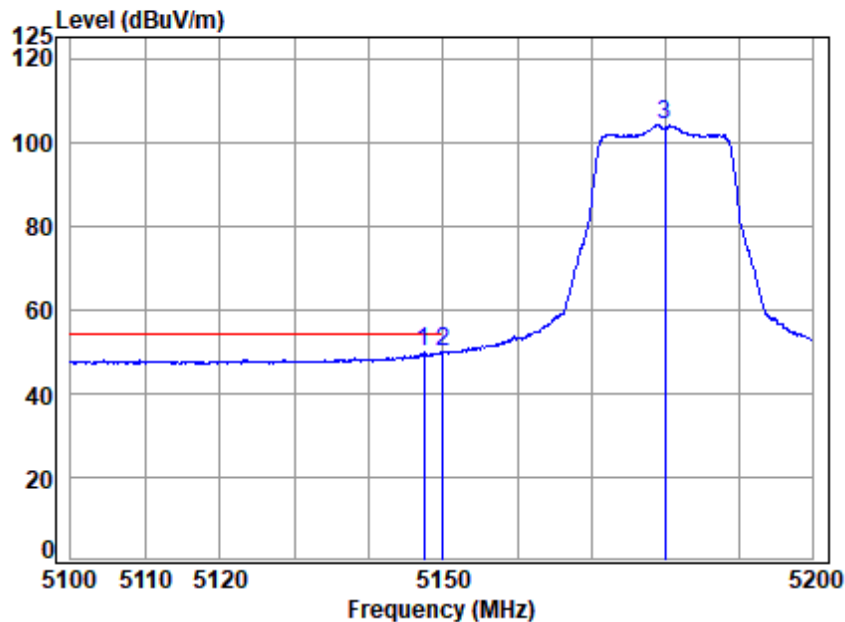


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.458	18.83	33.91	31.28	28.22	49.68	54.00	-4.32 Average
2 q	5149.980	18.83	33.90	31.28	28.61	50.06	54.00	-3.94 Average
3	5180.000	18.88	33.96	31.30	82.58	104.12	-----	----- Average



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

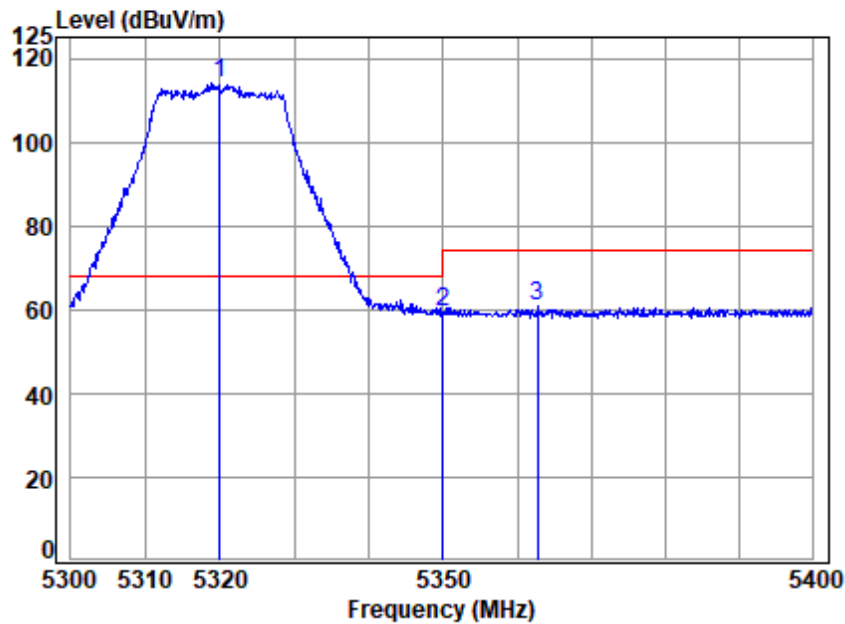


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5320.000		19.07	34.28	31.37	92.17	114.15	68.20	45.95	peak
2 5350.020		19.11	34.40	31.39	37.11	59.23	74.00	-14.77	peak
3 5362.782		19.13	34.45	31.39	38.61	60.80	74.00	-13.20	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

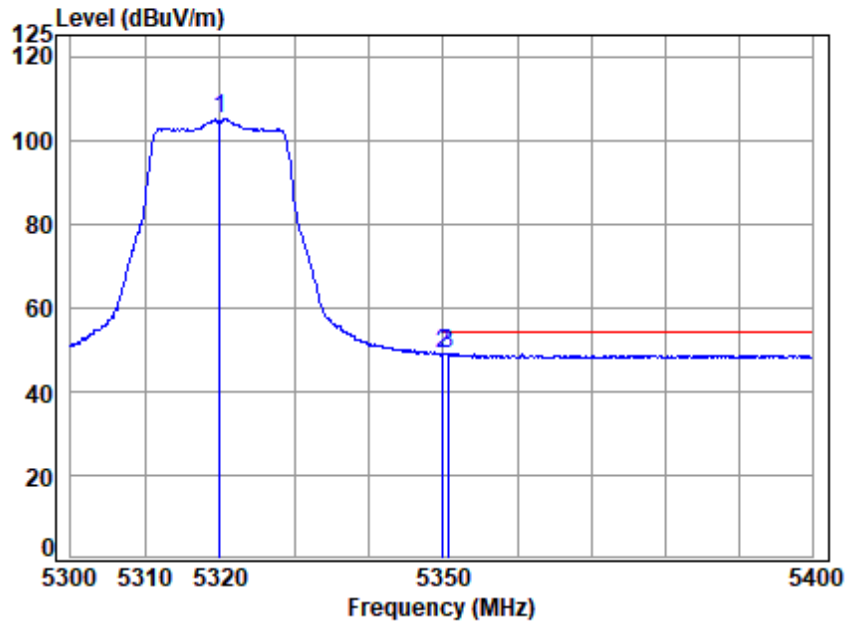

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11N20


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	19.07	34.28	31.37	83.01	104.99	-----	-----	Average
2 5350.020	19.11	34.40	31.39	26.92	49.04	54.00	-4.96	Average
3 q 5350.667	19.11	34.40	31.39	26.92	49.04	54.00	-4.96	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

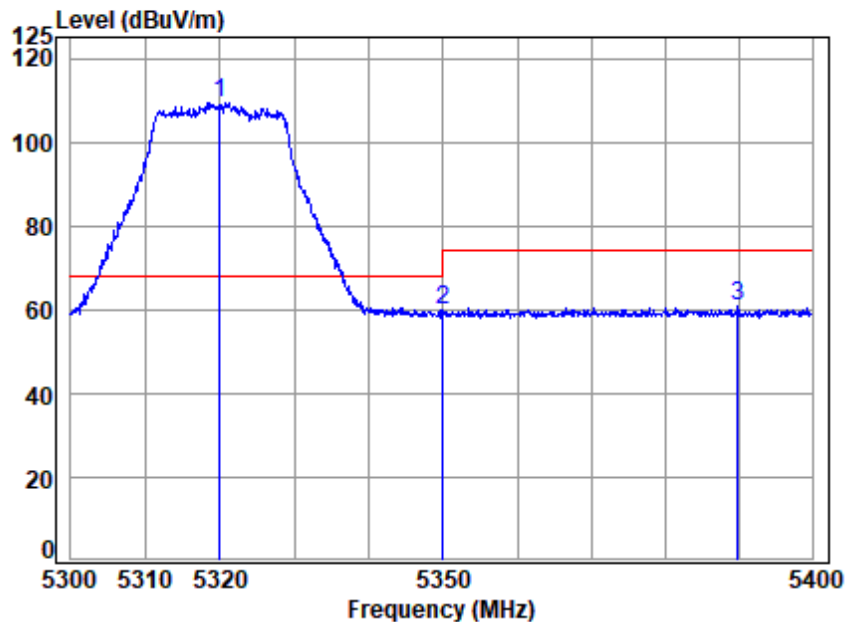


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 p 5320.000	19.07	34.28	31.37	87.57	109.55	68.20	41.35	Peak	
2 5350.020	19.11	34.40	31.39	37.91	60.03	74.00	-13.97	Peak	
3 5389.916	19.16	34.56	31.41	38.39	60.70	74.00	-13.30	Peak	



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

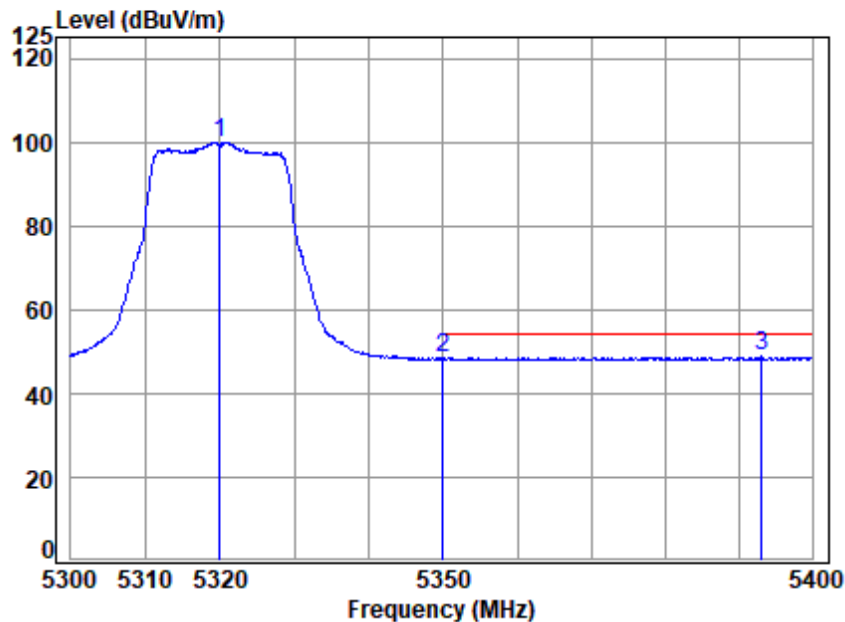


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	19.07	34.28	31.37	78.05	100.03	-----	-----	Average
2 5350.020	19.11	34.40	31.39	26.28	48.40	54.00	-5.60	Average
3 q 5393.141	19.17	34.57	31.41	26.41	48.74	54.00	-5.26	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

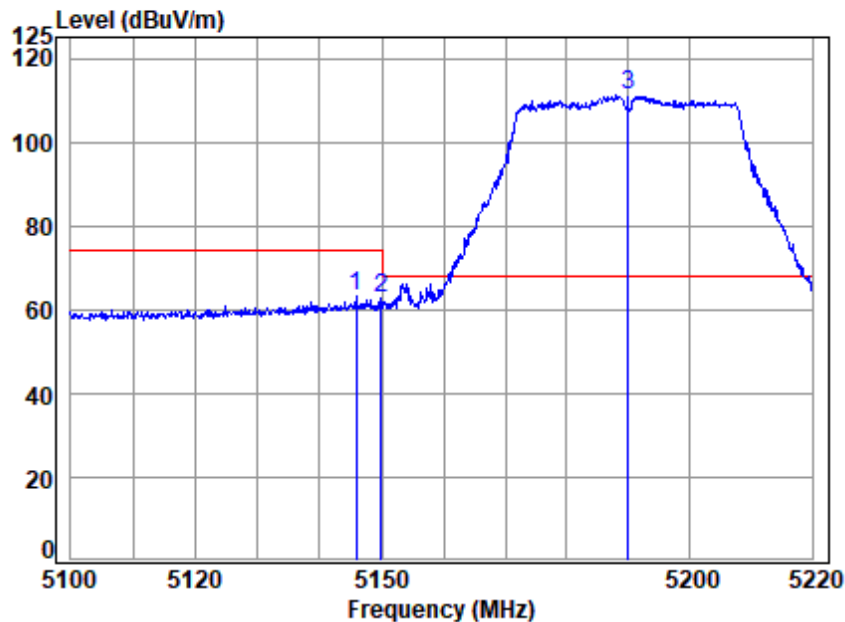


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.870	18.83	33.91	31.28	41.59	63.05	74.00	-10.95	peak
2	5149.980	18.83	33.90	31.28	41.15	62.60	74.00	-11.40	peak
3 p	5190.000	18.89	33.98	31.30	89.49	111.06	68.20	42.86	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

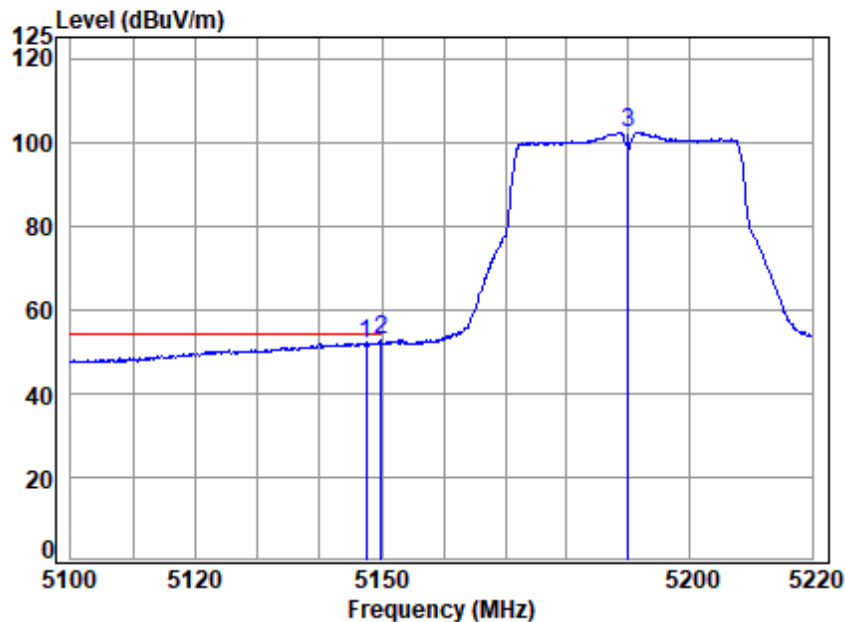


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.545	18.83	33.90	31.28	30.53	51.98	54.00	-2.02 Average
2 q	5149.980	18.83	33.90	31.28	31.11	52.56	54.00	-1.44 Average
3	5190.000	18.89	33.98	31.30	80.85	102.42	-----	----- Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

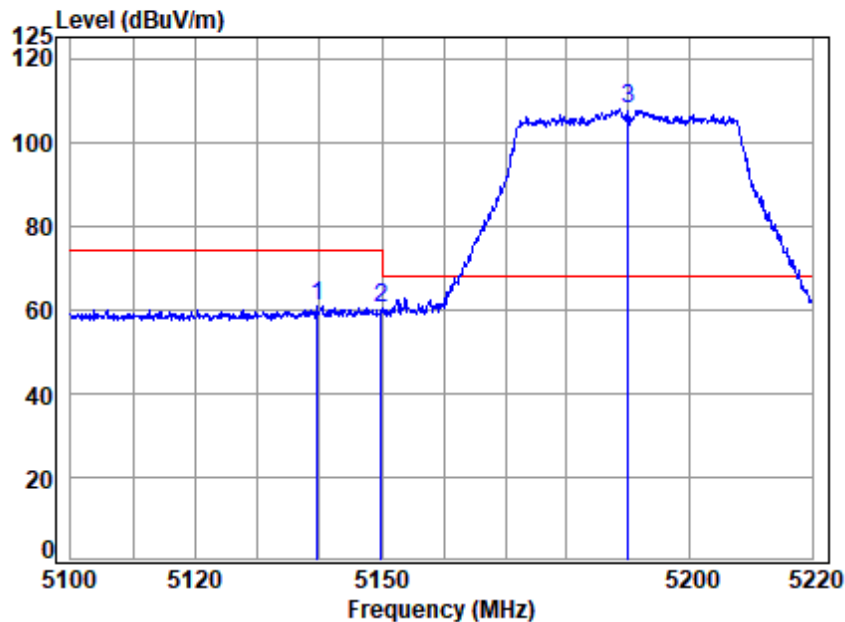


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5139.650	18.82	33.92	31.28	39.21	60.67	74.00	-13.33	Peak
2	5149.980	18.83	33.90	31.28	38.95	60.40	74.00	-13.60	Peak
3 p	5190.000	18.89	33.98	31.30	86.49	108.06	68.20	39.86	Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

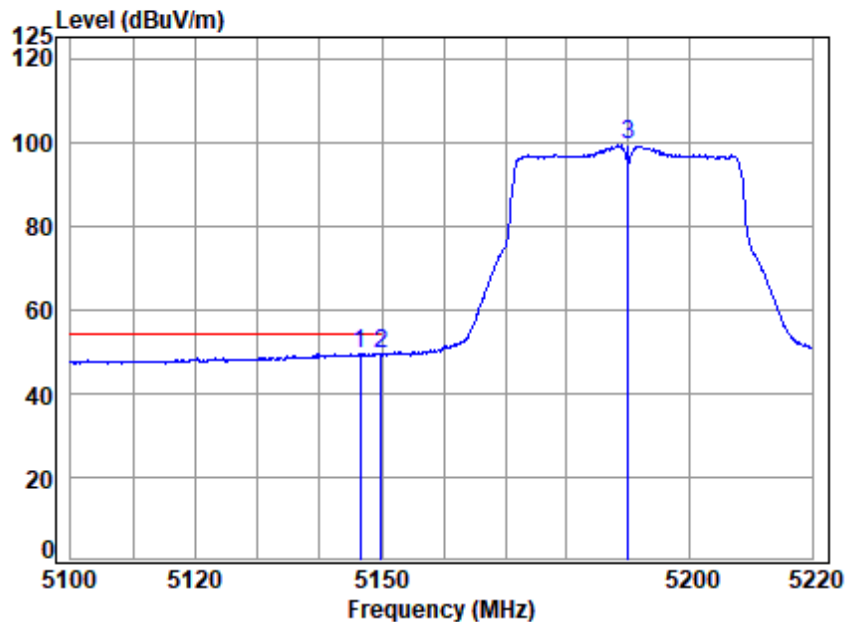


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5146.588	18.83	33.91	31.28	28.01	49.47	54.00	-4.53	Average
2 5149.980	18.83	33.90	31.28	27.79	49.24	54.00	-4.76	Average
3 5190.000	18.89	33.98	31.30	77.66	99.23	-----	-----	Average



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

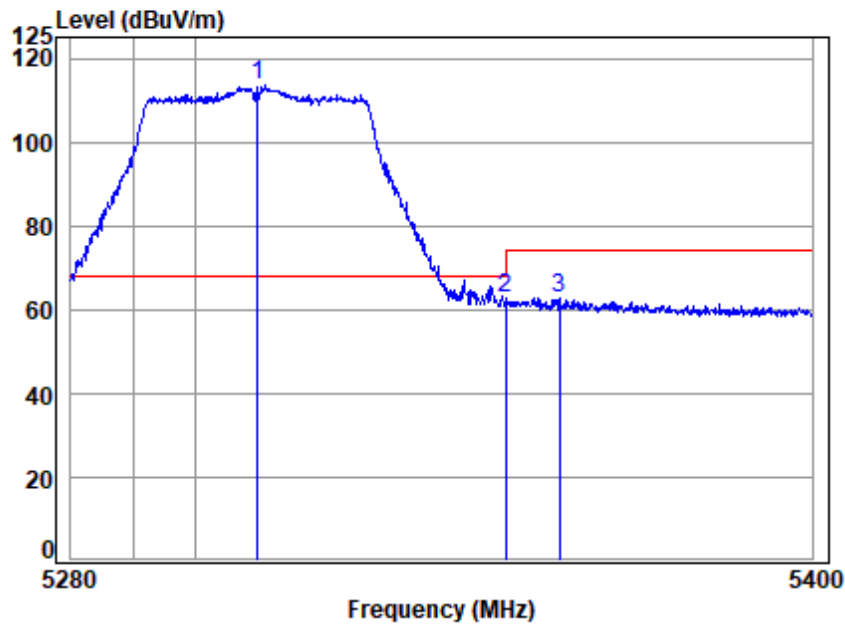


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5310.000	19.06	34.24	31.36	91.50	113.44	68.20	45.24 peak
2	5350.020	19.11	34.40	31.39	40.70	62.82	74.00	-11.18 peak
3	5358.777	19.12	34.44	31.39	40.58	62.75	74.00	-11.25 peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

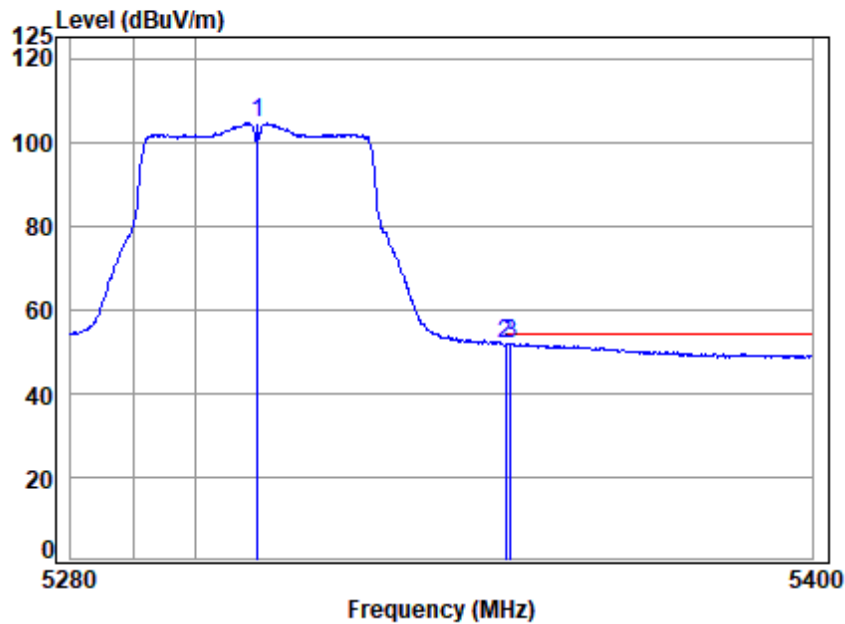


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	19.06	34.24	31.36	82.48	104.42	-----	Average
2	5350.020	19.11	34.40	31.39	29.63	51.75	54.00	-2.25 Average
3 q	5350.834	19.11	34.40	31.39	29.92	52.04	54.00	-1.96 Average



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

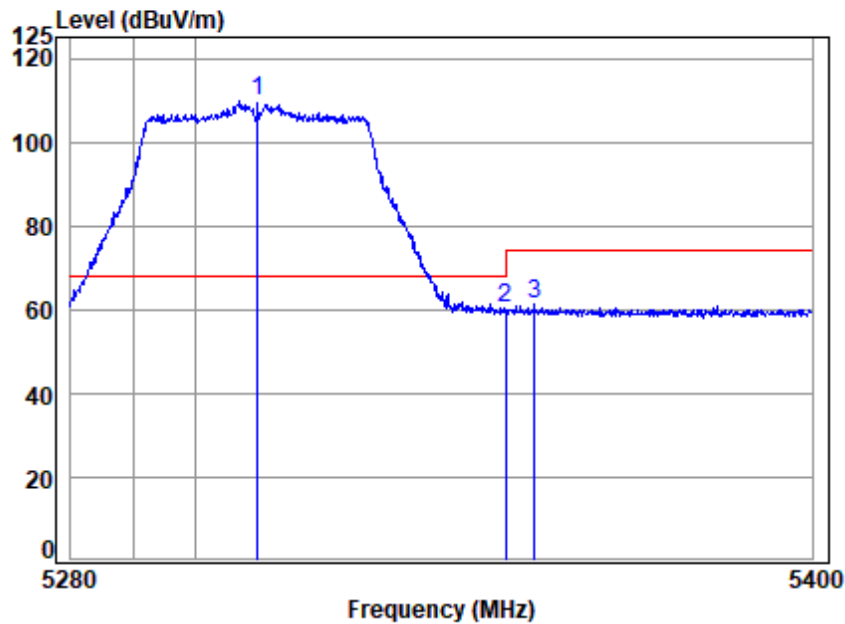

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5310.000	19.06	34.24	31.36	87.82	109.76	68.20	41.56	Peak
2 5350.020	19.11	34.40	31.39	38.41	60.53	74.00	-13.47	Peak
3 5354.804	19.12	34.42	31.39	39.06	61.21	74.00	-12.79	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

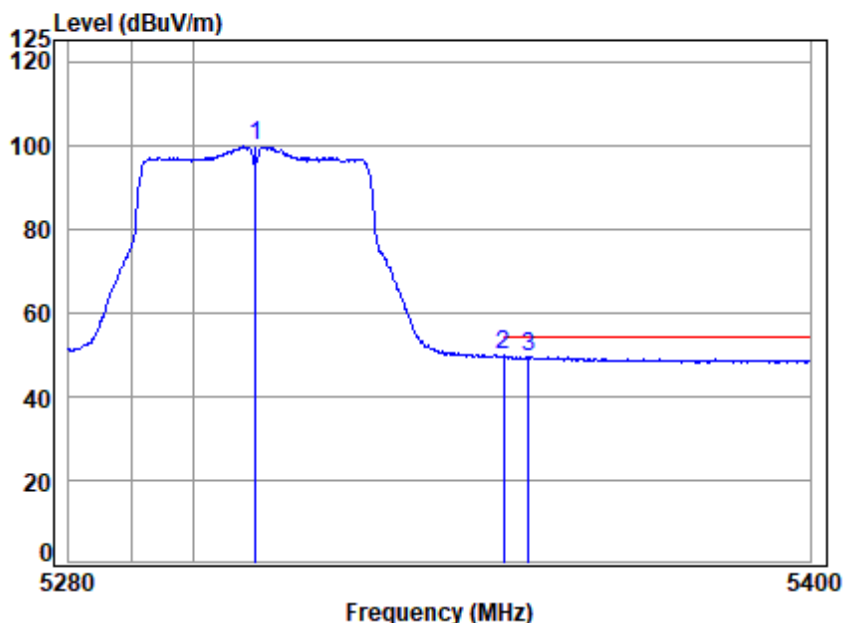


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	19.06	34.24	31.36	77.71	99.65	-----	Average
2 q	5350.020	19.11	34.40	31.39	27.62	49.74	54.00	-4.26 Average
3	5354.082	19.12	34.42	31.39	27.42	49.57	54.00	-4.43 Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

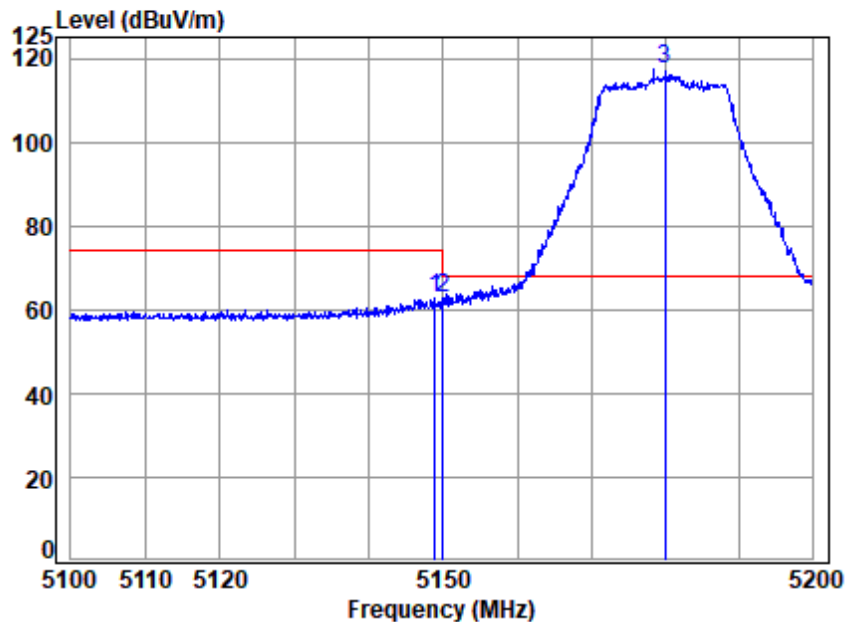


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.857	18.83	33.90	31.28	41.30	62.75	74.00	-11.25	peak
2	5149.980	18.83	33.90	31.28	41.07	62.52	74.00	-11.48	peak
3 p	5180.000	18.88	33.96	31.30	95.87	117.41	68.20	49.21	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

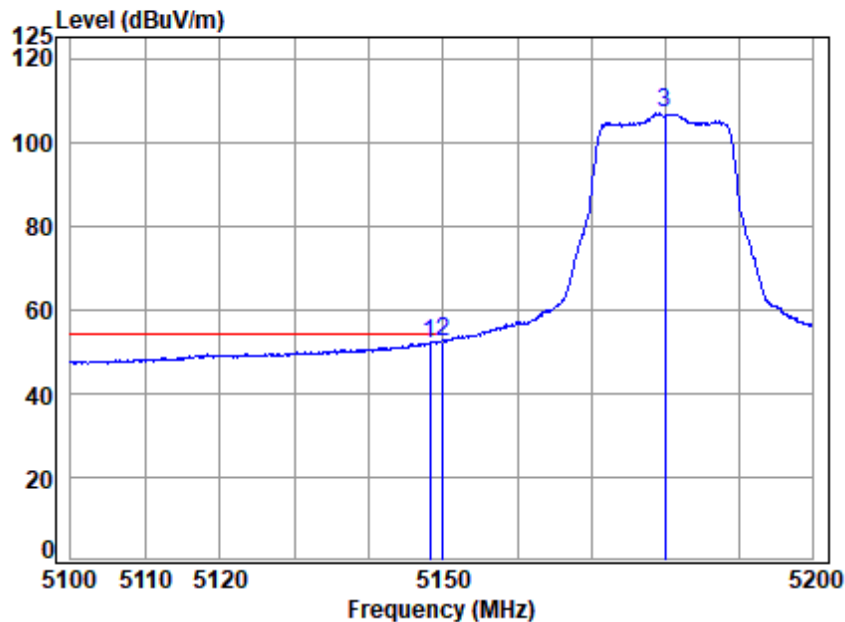


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.158	18.83	33.90	31.28	30.53	51.98	54.00	-2.02 Average
2 q	5149.980	18.83	33.90	31.28	30.89	52.34	54.00	-1.66 Average
3	5180.000	18.88	33.96	31.30	85.23	106.77	-----	----- Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

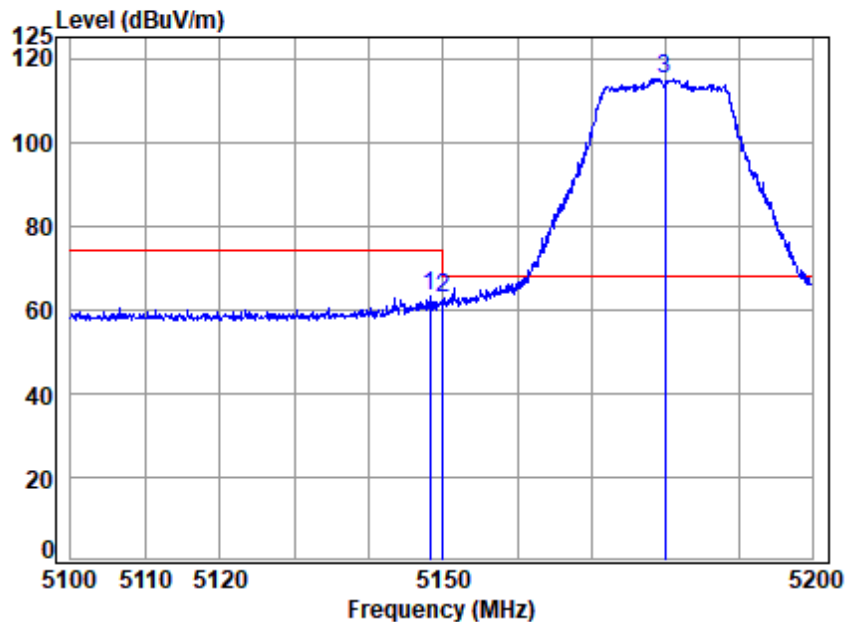


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.158	18.83	33.90	31.28	41.81	63.26	74.00	-10.74	Peak
2	5149.980	18.83	33.90	31.28	41.18	62.63	74.00	-11.37	Peak
3 p	5180.000	18.88	33.96	31.30	93.71	115.25	68.20	47.05	Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

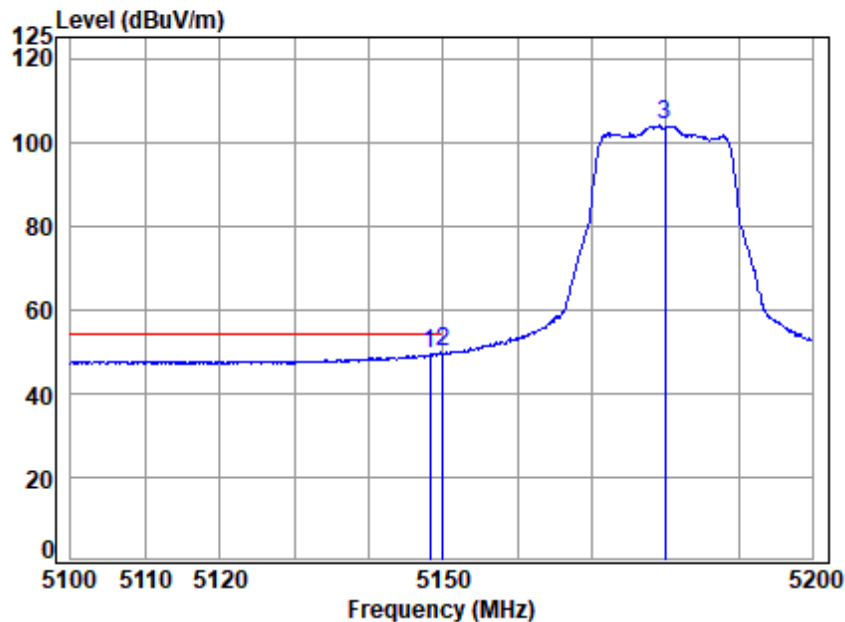


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.257	18.83	33.90	31.28	27.96	49.41	54.00	-4.59 Average
2 q	5149.980	18.83	33.90	31.28	28.25	49.70	54.00	-4.30 Average
3	5180.000	18.88	33.96	31.30	82.70	104.24	-----	----- Average



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

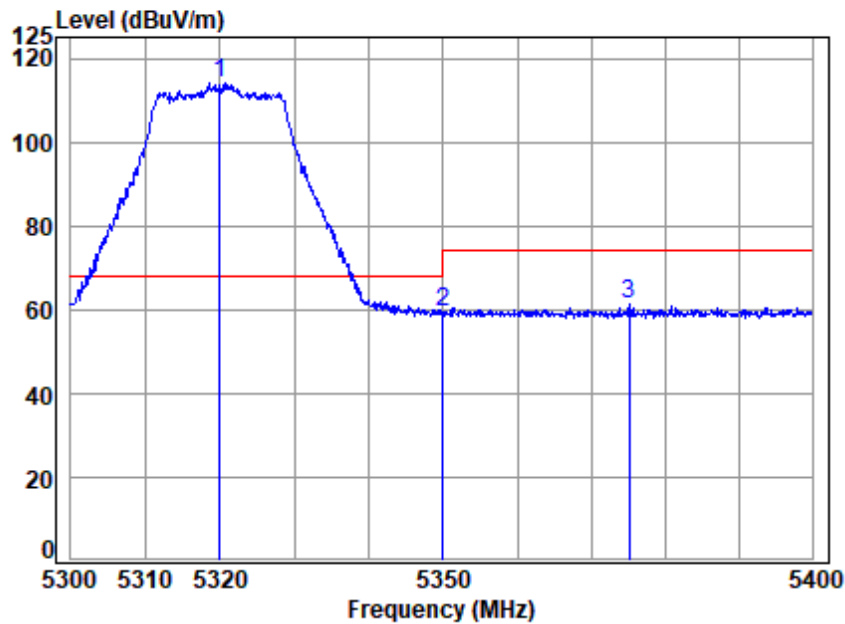


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 p 5320.000	19.07	34.28	31.37	91.89	113.87	68.20	45.67	peak	
2 5350.020	19.11	34.40	31.39	37.41	59.53	74.00	-14.47	peak	
3 5375.126	19.14	34.50	31.40	38.91	61.15	74.00	-12.85	peak	



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

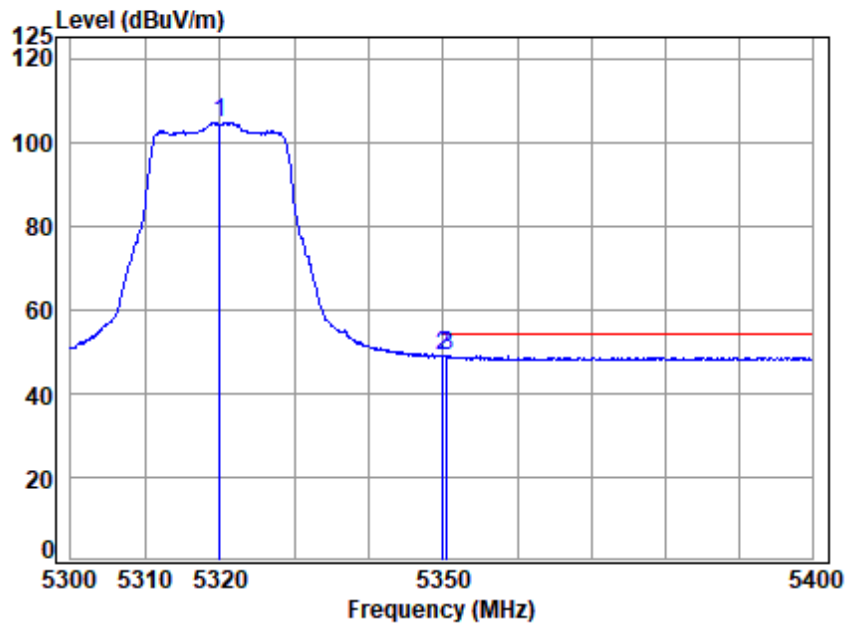

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11AC20


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	19.07	34.28	31.37	82.66	104.64	-----	-----	Average
2 q 5350.020	19.11	34.40	31.39	27.01	49.13	54.00	-4.87	Average
3 5350.566	19.11	34.40	31.39	26.93	49.05	54.00	-4.95	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

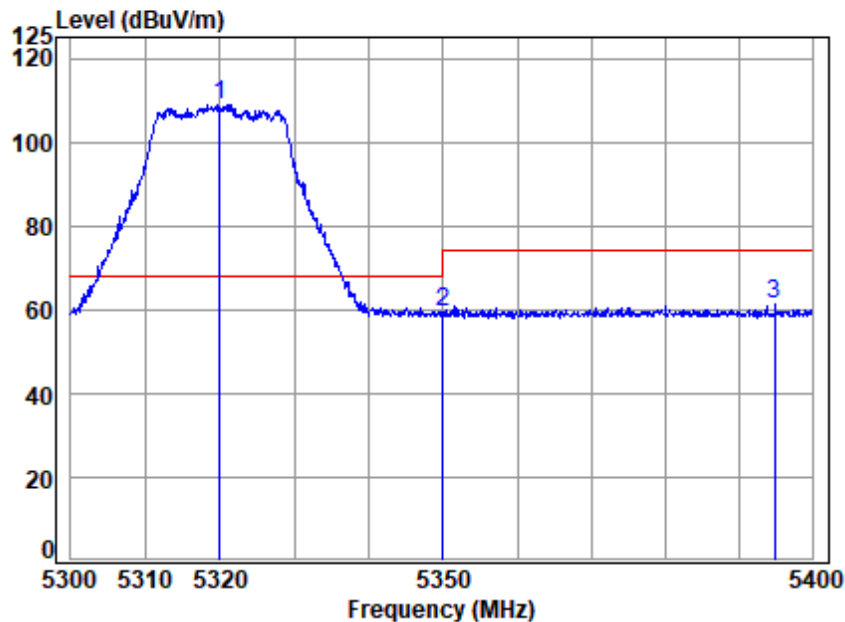

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11AC20


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5320.000	19.07	34.28	31.37	86.96	108.94	68.20	40.74	Peak
2	5350.020	19.11	34.40	31.39	37.20	59.32	74.00	-14.68	Peak
3	5394.956	19.17	34.58	31.41	38.86	61.20	74.00	-12.80	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

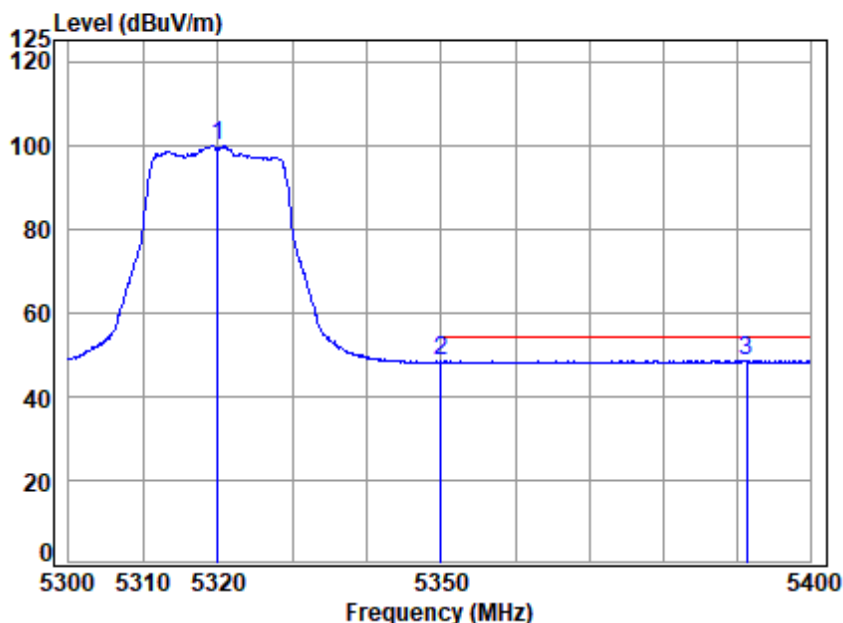


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	19.07	34.28	31.37	77.91	99.89	-----	-----	Average
2	5350.020	19.11	34.40	31.39	26.13	48.25	54.00	-5.75	Average
3 q	5391.427	19.17	34.57	31.41	26.35	48.68	54.00	-5.32	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

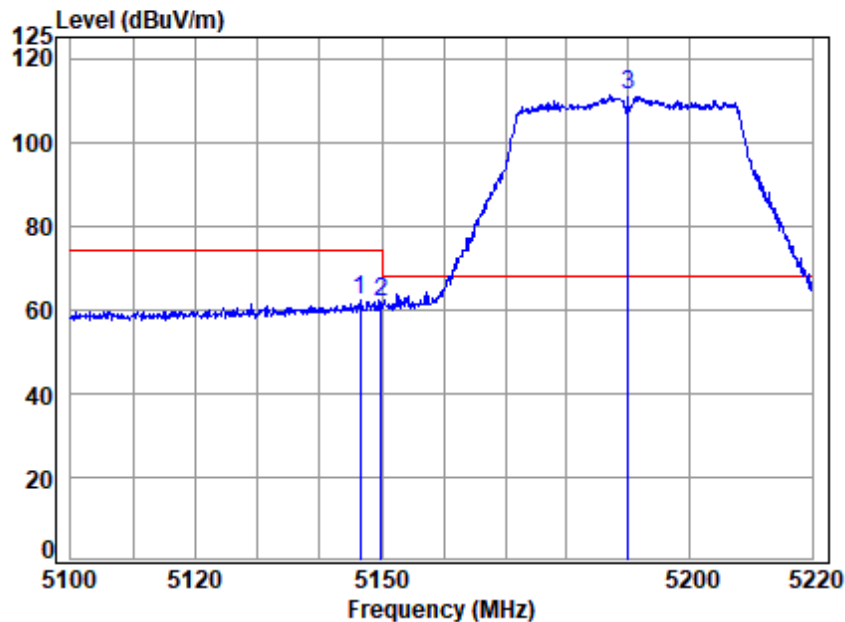


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.468	18.83	33.91	31.28	40.71	62.17	74.00	-11.83	peak
2	5149.980	18.83	33.90	31.28	40.16	61.61	74.00	-12.39	peak
3 p	5190.000	18.89	33.98	31.30	89.86	111.43	68.20	43.23	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

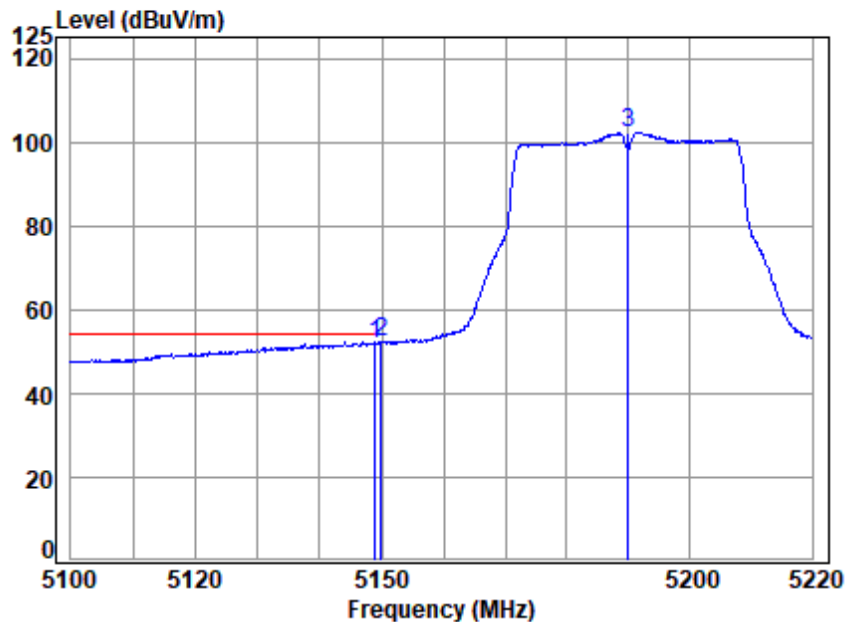


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.982	18.83	33.90	31.28	30.42	51.87	54.00	-2.13 Average
2 q	5149.980	18.83	33.90	31.28	30.63	52.08	54.00	-1.92 Average
3	5190.000	18.89	33.98	31.30	80.70	102.27	-----	----- Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

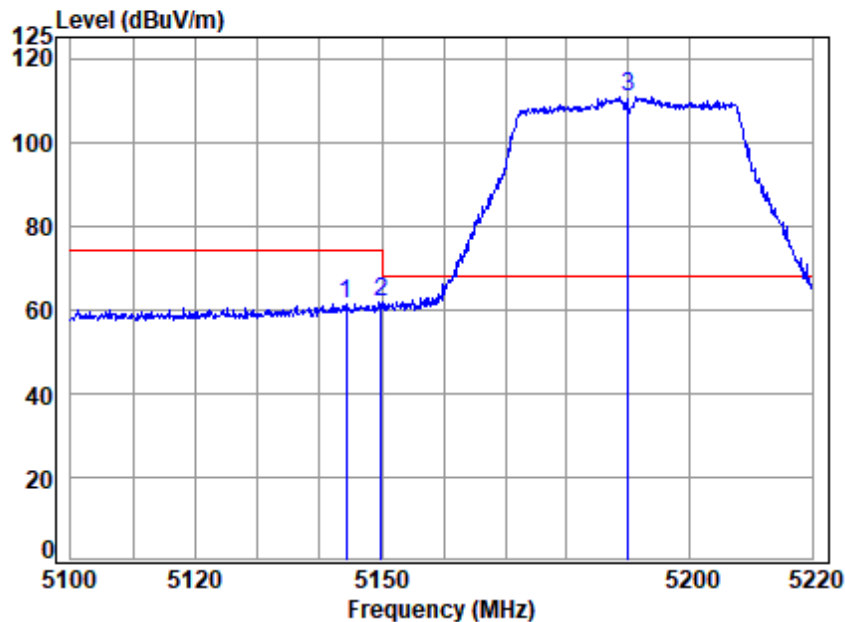


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.314	18.83	33.91	31.28	39.96	61.42	74.00	-12.58 Peak
2	5149.980	18.83	33.90	31.28	40.26	61.71	74.00	-12.29 Peak
3 p	5190.000	18.89	33.98	31.30	89.33	110.90	68.20	42.70 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

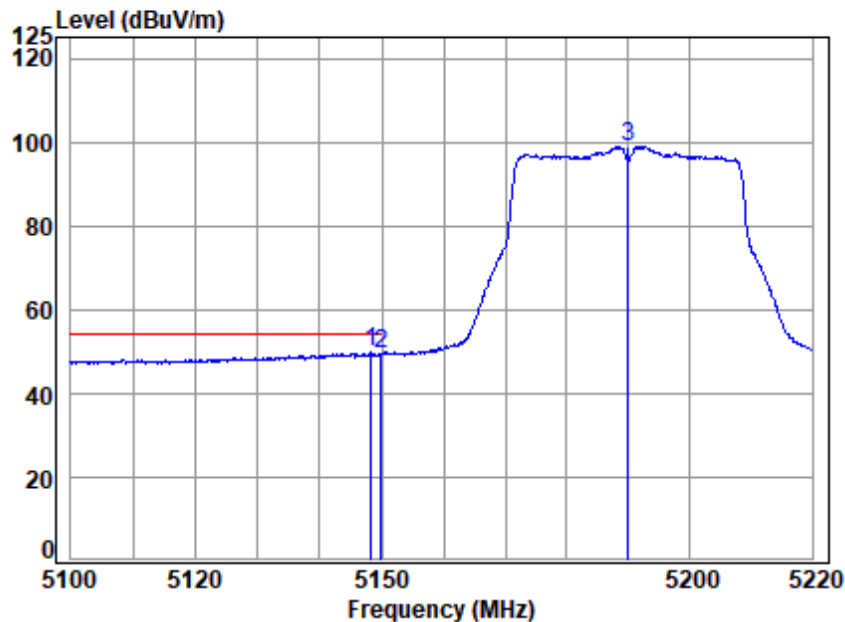


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5148.264	18.83	33.90	31.28	28.28	49.73	54.00	-4.27	Average
2 5149.980	18.83	33.90	31.28	28.12	49.57	54.00	-4.43	Average
3 5190.000	18.89	33.98	31.30	77.29	98.86	-----	-----	Average



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

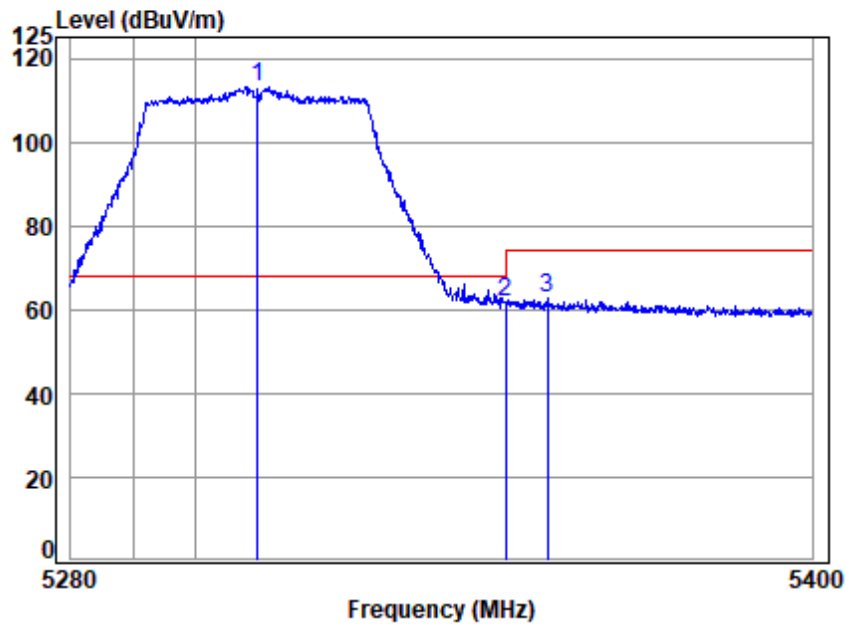

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11AC40


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5310.000	19.06	34.24	31.36	91.34	113.28	68.20	45.08	peak
2	5350.020	19.11	34.40	31.39	39.87	61.99	74.00	-12.01	peak
3	5356.850	19.12	34.43	31.39	40.62	62.78	74.00	-11.22	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

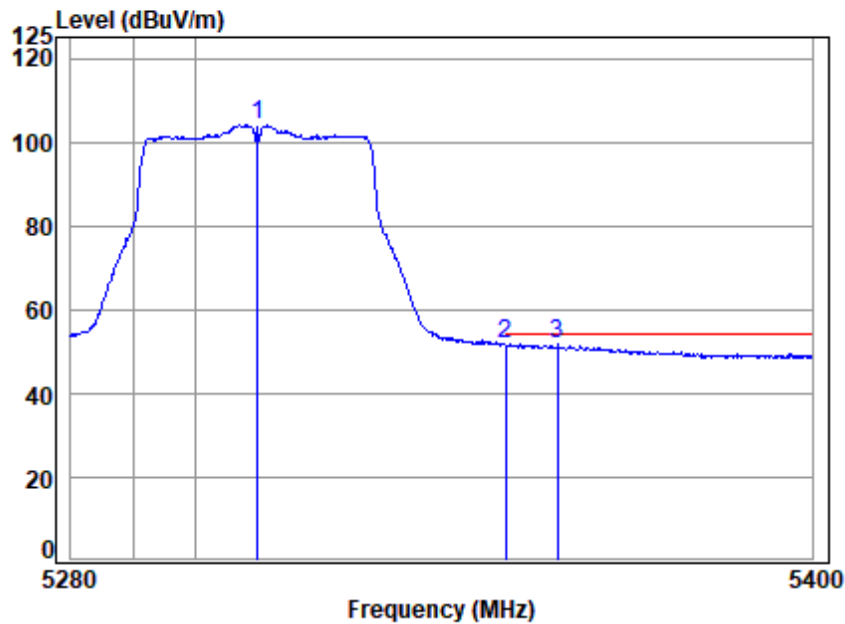


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	19.06	34.24	31.36	82.26	104.20	-----	----- Average
2	5350.020	19.11	34.40	31.39	29.53	51.65	54.00	-2.35 Average
3 q	5358.536	19.12	34.43	31.39	29.53	51.69	54.00	-2.31 Average



Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

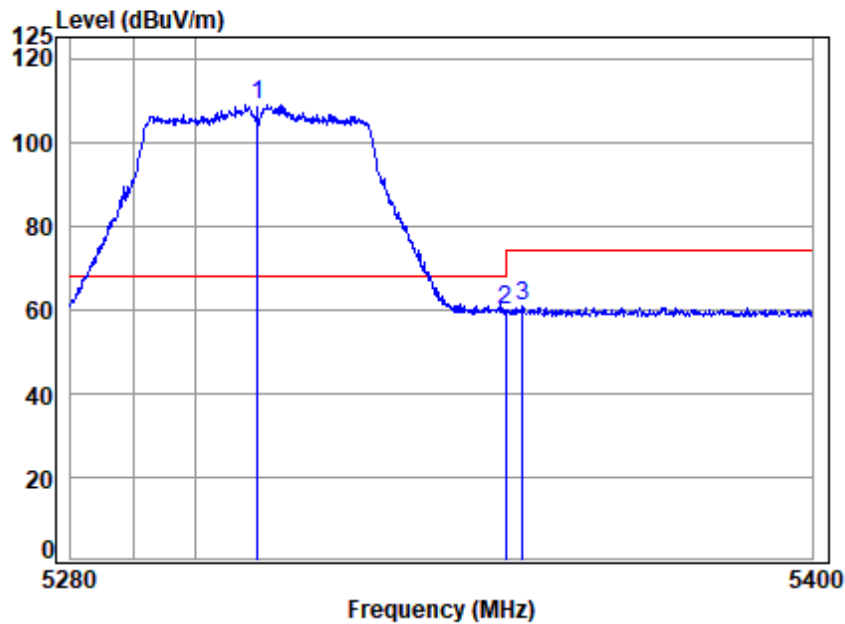


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p 5310.000	19.06	34.24	31.36	86.93	108.87	68.20	40.67	Peak
2 5350.020	19.11	34.40	31.39	37.75	59.87	74.00	-14.13	Peak
3 5352.879	19.11	34.41	31.39	38.69	60.82	74.00	-13.18	Peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

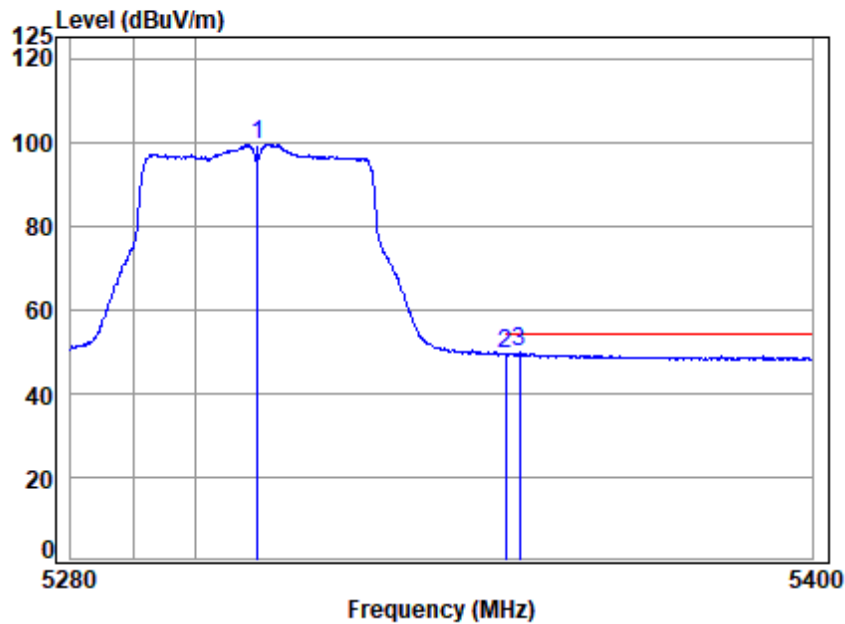


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	19.06	34.24	31.36	77.51	99.45	-----	----- Average
2	5350.020	19.11	34.40	31.39	27.32	49.44	54.00	-4.56 Average
3 q	5352.277	19.11	34.41	31.39	27.68	49.81	54.00	-4.19 Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

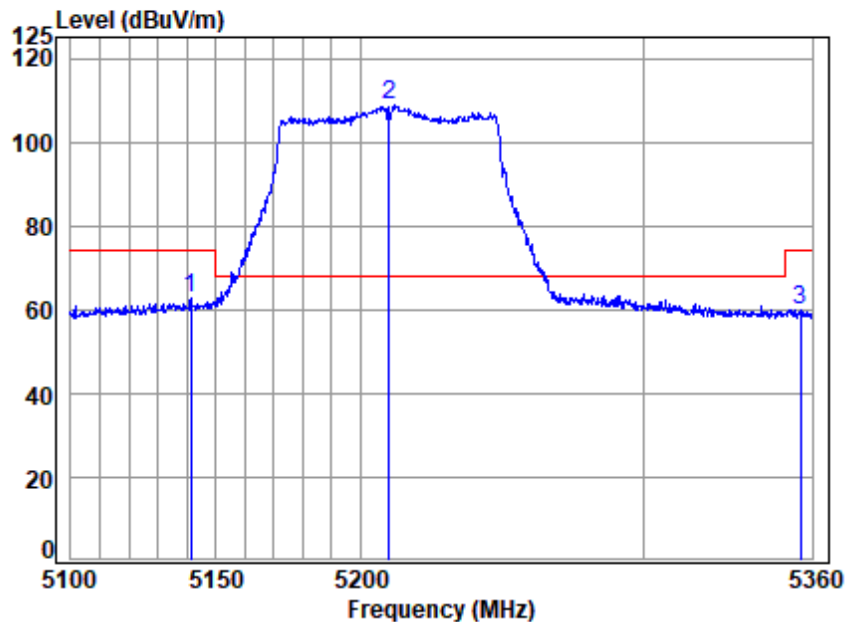


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5210 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5141.248	18.82	33.92	31.28	41.35	62.81	74.00	-11.19	peak
2 p	5210.000	18.92	34.02	31.31	87.24	108.87	68.20	40.67	peak
3	5356.004	19.12	34.42	31.39	37.89	60.04	74.00	-13.96	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

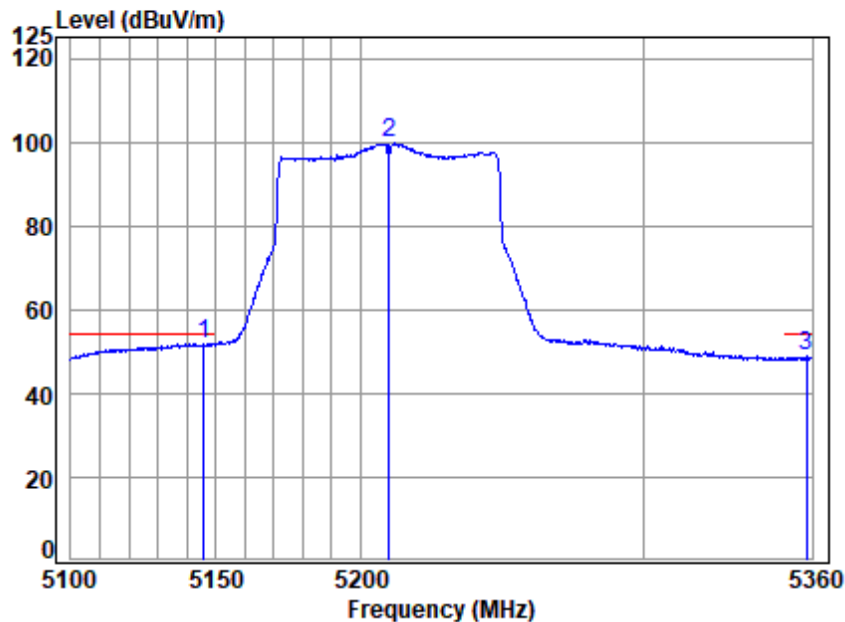


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5210 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5145.595	18.83	33.91	31.28	30.58	52.04	54.00	-1.96 Average
2	5210.000	18.92	34.02	31.31	77.99	99.62	-----	----- Average
3	5357.868	19.12	34.43	31.39	26.60	48.76	54.00	-5.24 Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

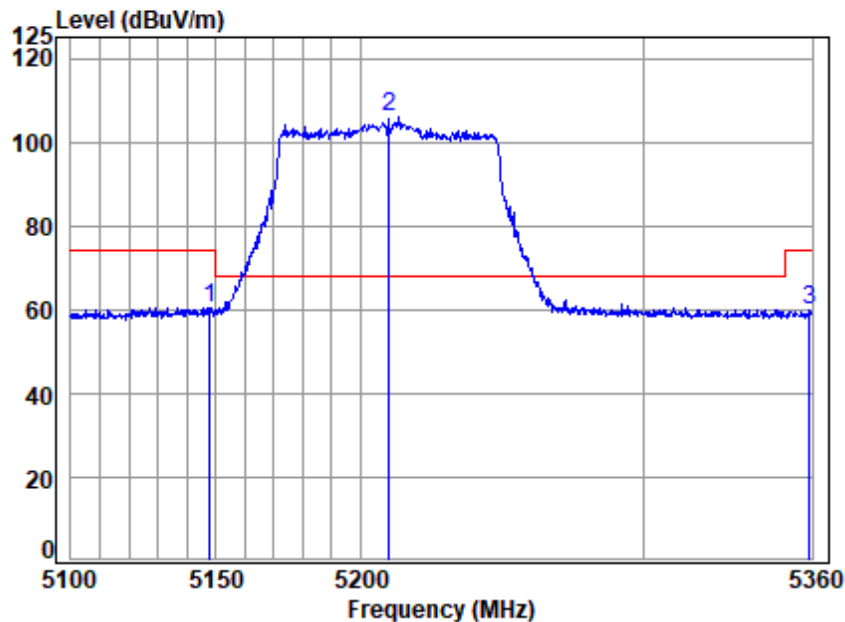


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5210 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.643	18.83	33.90	31.28	38.95	60.40	74.00	-13.60	Peak
2 p	5210.000	18.92	34.02	31.31	84.42	106.05	68.20	37.85	Peak
3	5359.201	19.12	34.44	31.39	37.48	59.65	74.00	-14.35	Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

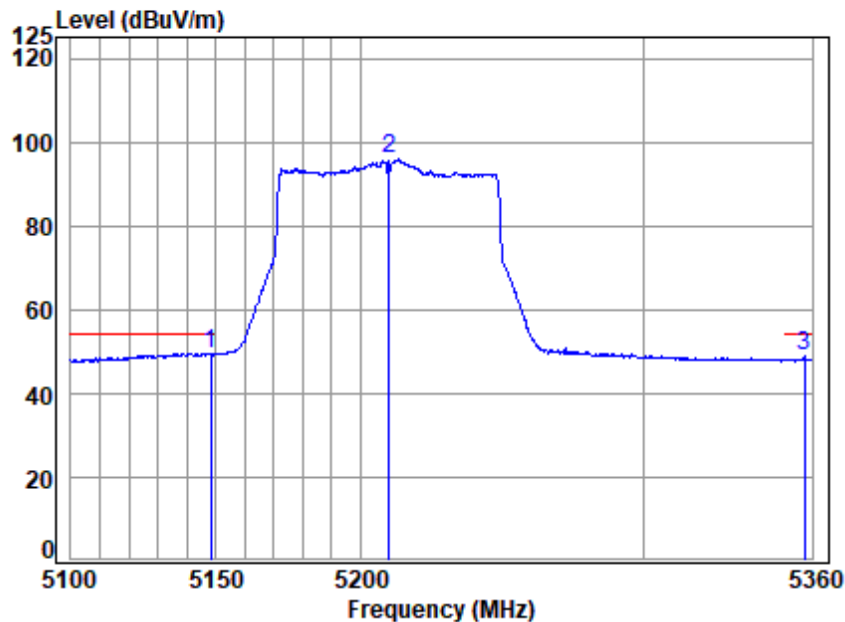


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5210 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q 5148.154	18.83	33.90	31.28	28.18	49.63	54.00	-4.37	Average
2 5210.000	18.92	34.02	31.31	74.21	95.84	-----	-----	Average
3 5357.335	19.12	34.43	31.39	26.68	48.84	54.00	-5.16	Average



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

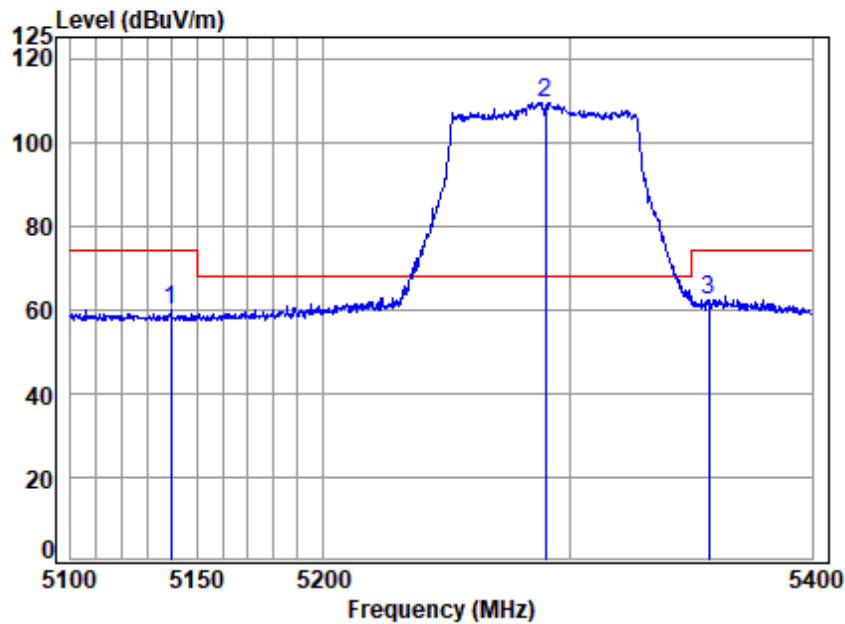


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5290 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5139.506	18.82	33.92	31.28	38.41	59.87	74.00	-14.13 peak
2 p	5290.000	19.03	34.18	31.35	87.57	109.43	68.20	41.23 peak
3	5357.267	19.12	34.43	31.39	40.28	62.44	74.00	-11.56 peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

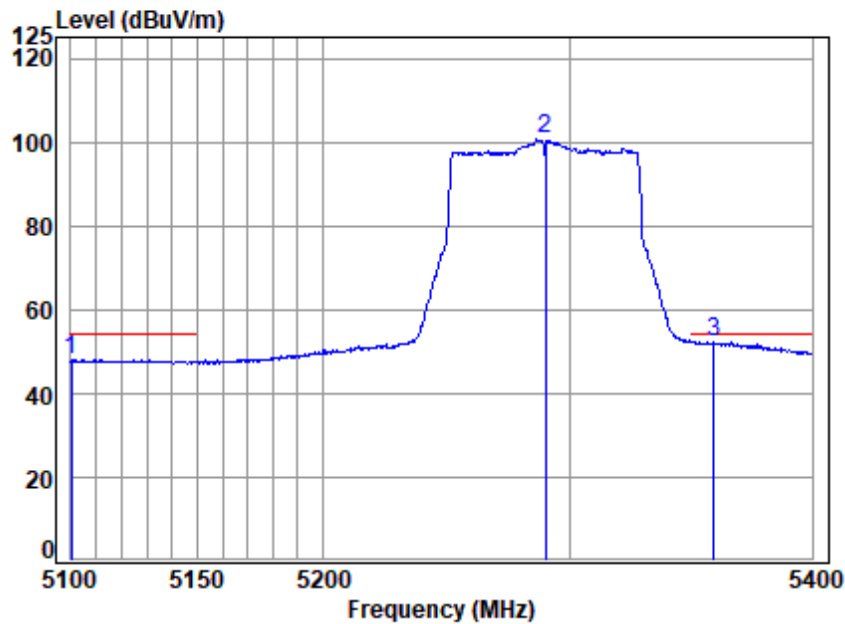


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5290 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5100.292	18.76	34.00	31.25	26.36	47.87	54.00	-6.13 Average
2	5290.000	19.03	34.18	31.35	78.79	100.65	-----	----- Average
3 q	5359.104	19.12	34.44	31.39	30.07	52.24	54.00	-1.76 Average



Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

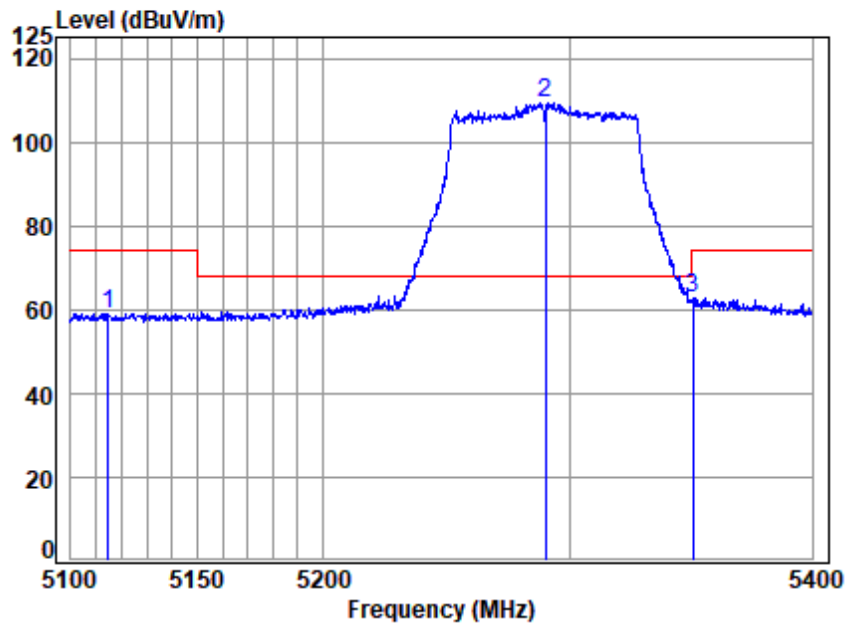


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5290 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5114.596	18.78	33.97	31.26	37.66	59.15	74.00	-14.85 Peak
2 p	5290.000	19.03	34.18	31.35	87.45	109.31	68.20	41.11 Peak
3	5350.535	19.11	34.40	31.39	40.71	62.83	74.00	-11.17 Peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

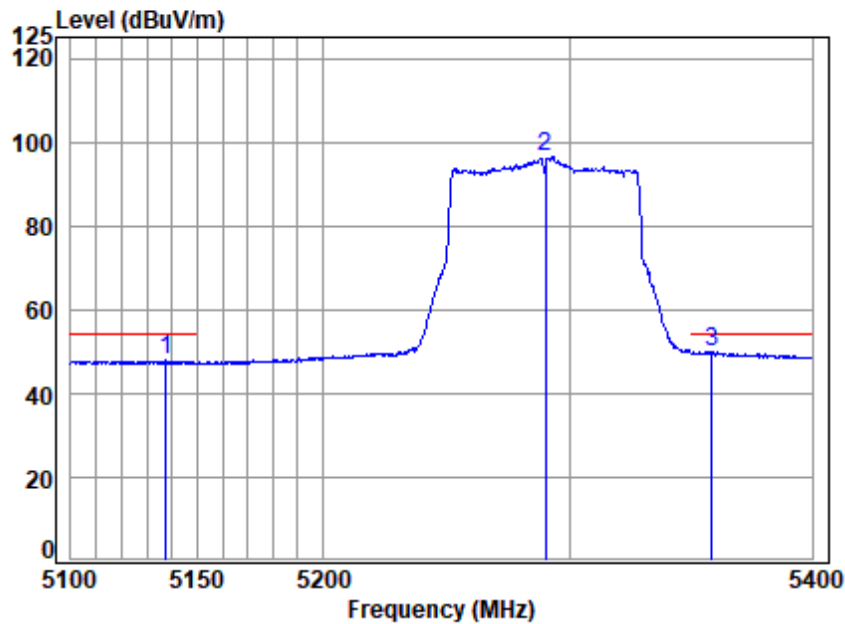


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5290 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5137.744	18.82	33.92	31.27	26.33	47.80	54.00	-6.20 Average
2	5290.000	19.03	34.18	31.35	74.63	96.49	-----	----- Average
3 q	5358.492	19.12	34.43	31.39	27.70	49.86	54.00	-4.14 Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

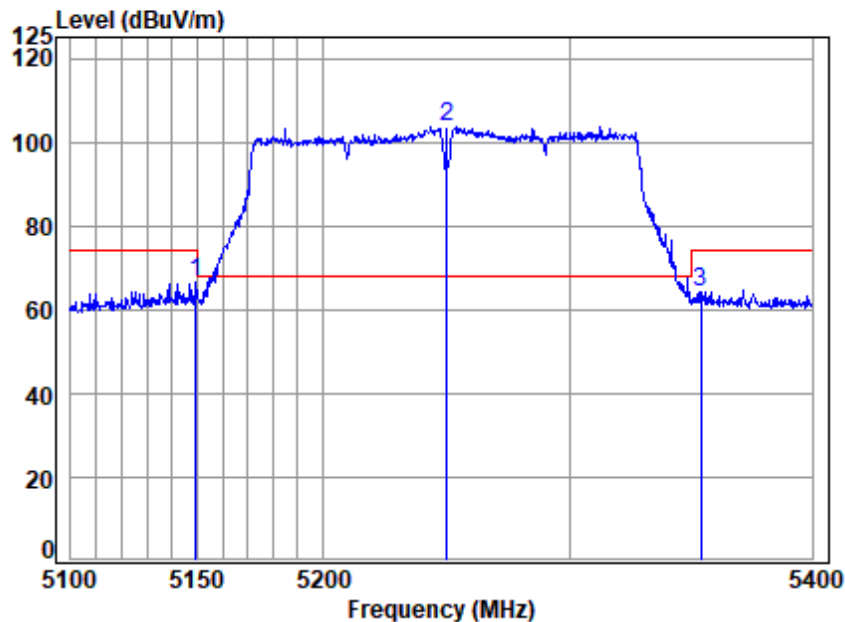

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5250 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.503	18.83	33.90	31.28	45.21	66.66	74.00	-7.34	peak
2 p	5250.000	18.97	34.10	31.33	81.99	103.73	68.20	35.53	peak
3	5353.899	19.12	34.42	31.39	42.23	64.38	74.00	-9.62	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

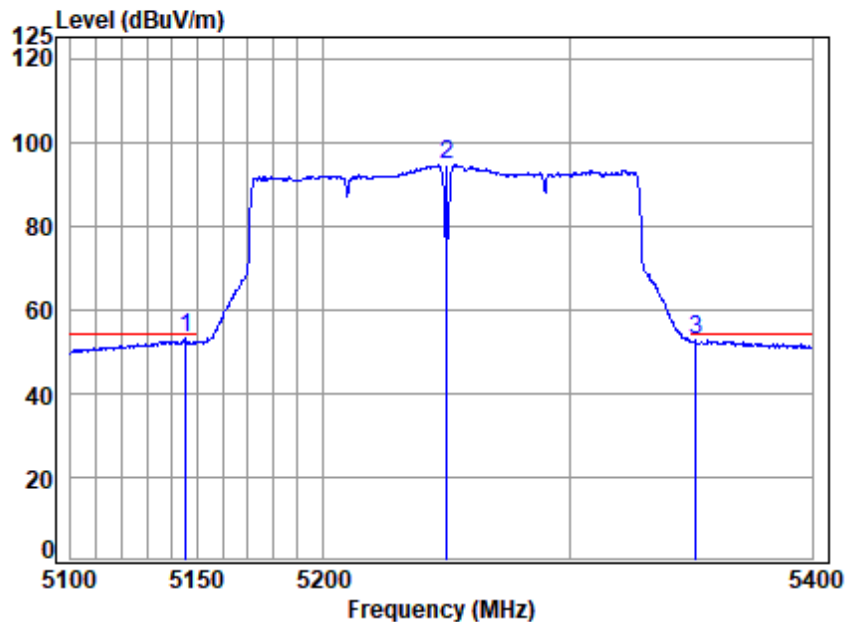


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5250 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5145.384	18.83	33.91	31.28	31.63	53.09	54.00	-0.91	Average
2 5250.000	18.97	34.10	31.33	73.00	94.74	-----	-----	Average
3 5351.758	19.11	34.41	31.39	30.66	52.79	54.00	-1.21	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

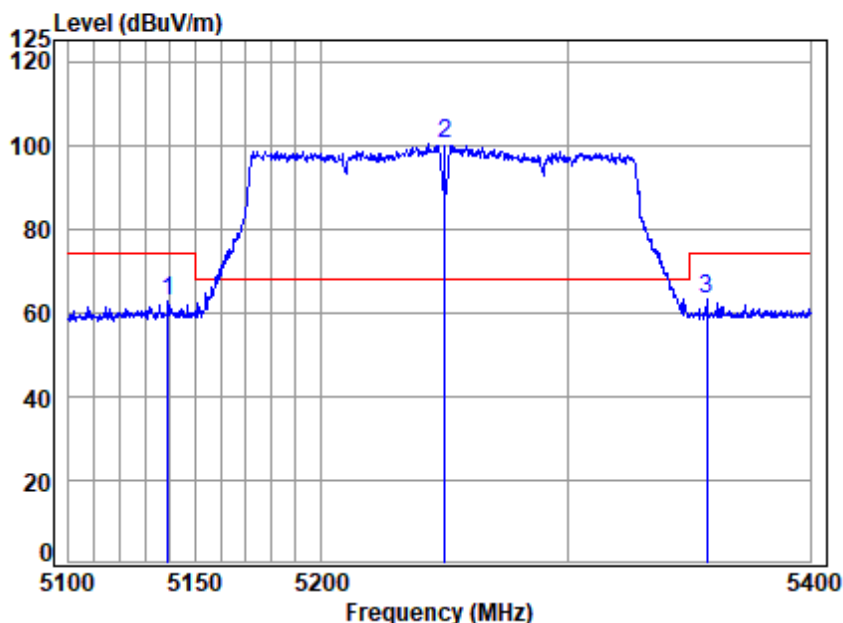


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5250 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5139.212	18.82	33.92	31.28	41.50	62.96	74.00	-11.04	Peak
2 p	5250.000	18.97	34.10	31.33	78.34	100.08	68.20	31.88	Peak
3	5357.267	19.12	34.43	31.39	40.86	63.02	74.00	-10.98	Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

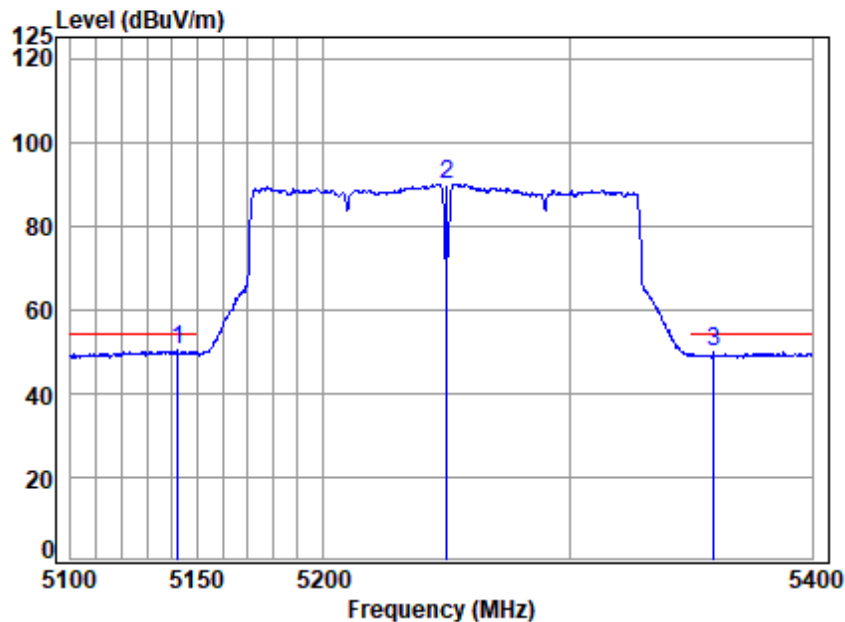


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5250 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5142.150	18.82	33.92	31.28	28.86	50.32	54.00	-3.68 Average
2	5250.000	18.97	34.10	31.33	68.30	90.04	-----	----- Average
3	5359.104	19.12	34.44	31.39	27.56	49.73	54.00	-4.27 Average



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

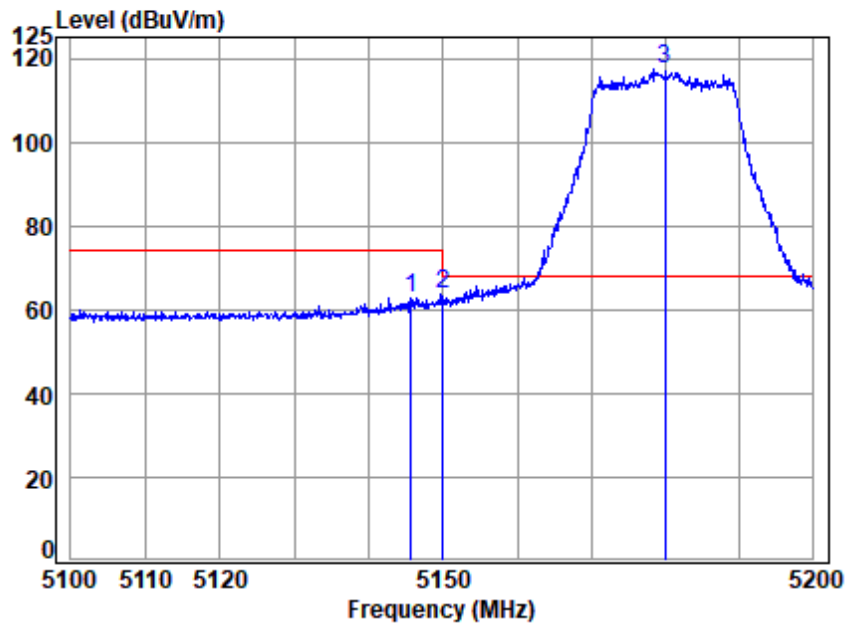


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.659	18.83	33.91	31.28	41.50	62.96	74.00	-11.04	peak
2	5149.980	18.83	33.90	31.28	42.29	63.74	74.00	-10.26	peak
3 p	5180.000	18.88	33.96	31.30	95.69	117.23	68.20	49.03	peak



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

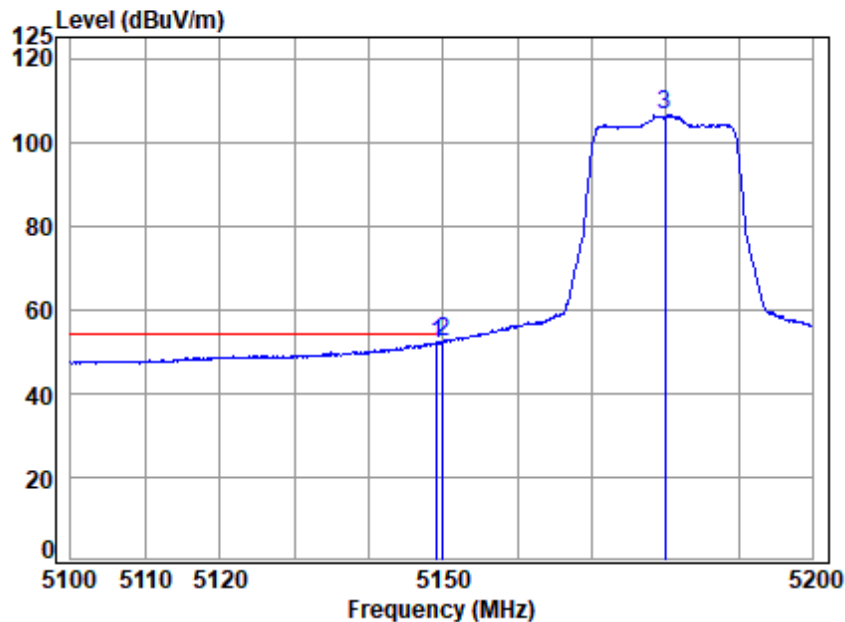


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.157	18.83	33.90	31.28	30.43	51.88	54.00	-2.12	Average
2 q	5149.980	18.83	33.90	31.28	30.97	52.42	54.00	-1.58	Average
3	5180.000	18.88	33.96	31.30	84.88	106.42	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

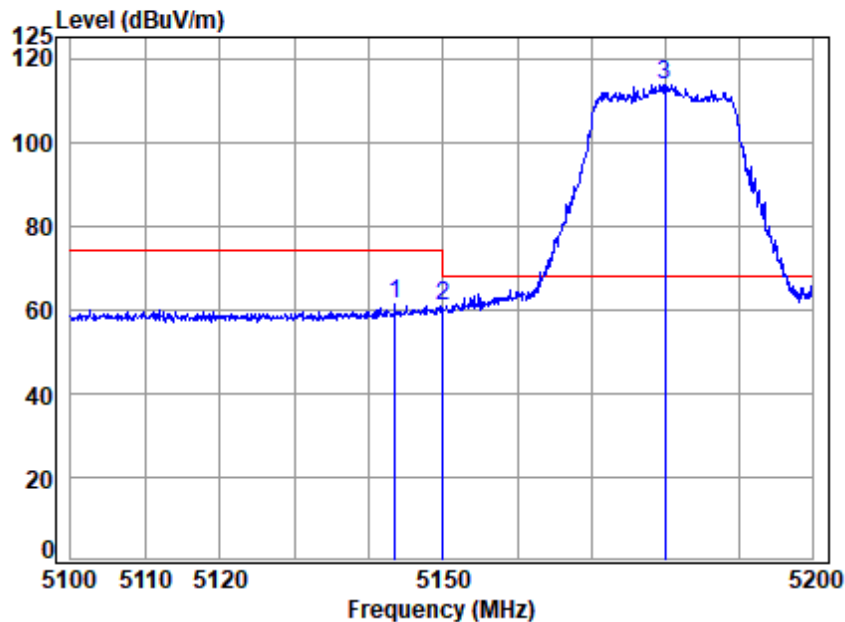

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5143.461	18.82	33.91	31.28	40.02	61.47	74.00	-12.53	Peak
2	5149.980	18.83	33.90	31.28	39.61	61.06	74.00	-12.94	Peak
3 p	5180.000	18.88	33.96	31.30	92.16	113.70	68.20	45.50	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

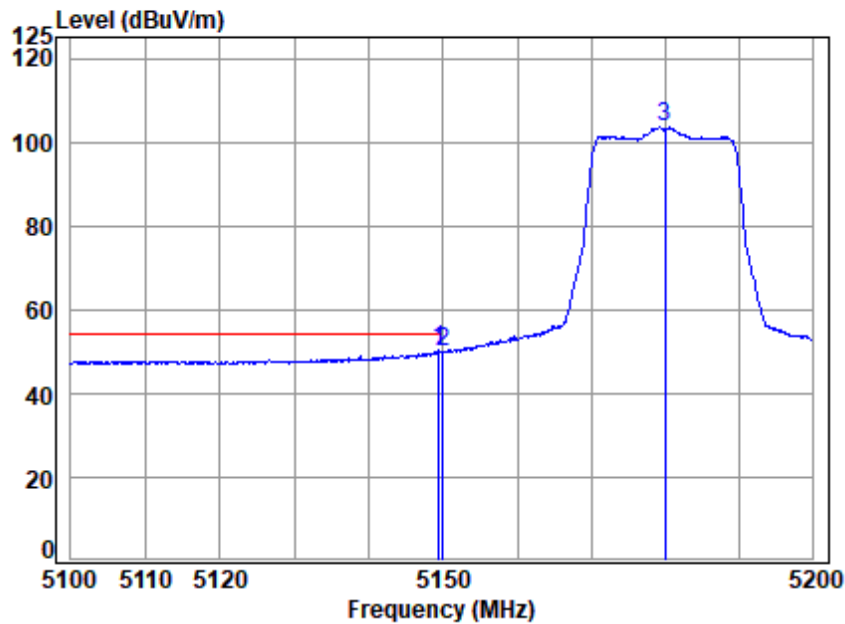

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5180 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5149.357	18.83	33.90	31.28	28.83	50.28	54.00	-3.72 Average
2	5149.980	18.83	33.90	31.28	28.57	50.02	54.00	-3.98 Average
3	5180.000	18.88	33.96	31.30	82.24	103.78	-----	----- Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 218 of 715

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

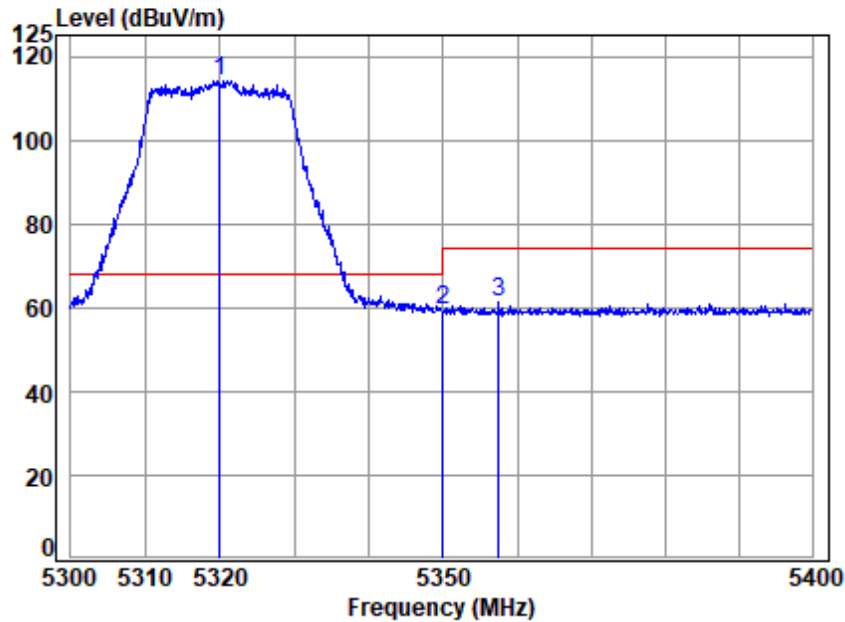

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5320.000	19.07	34.28	31.37	92.32	114.30	68.20	46.10	peak
2 5350.020	19.11	34.40	31.39	37.13	59.25	74.00	-14.75	peak
3 5357.472	19.12	34.43	31.39	39.06	61.22	74.00	-12.78	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

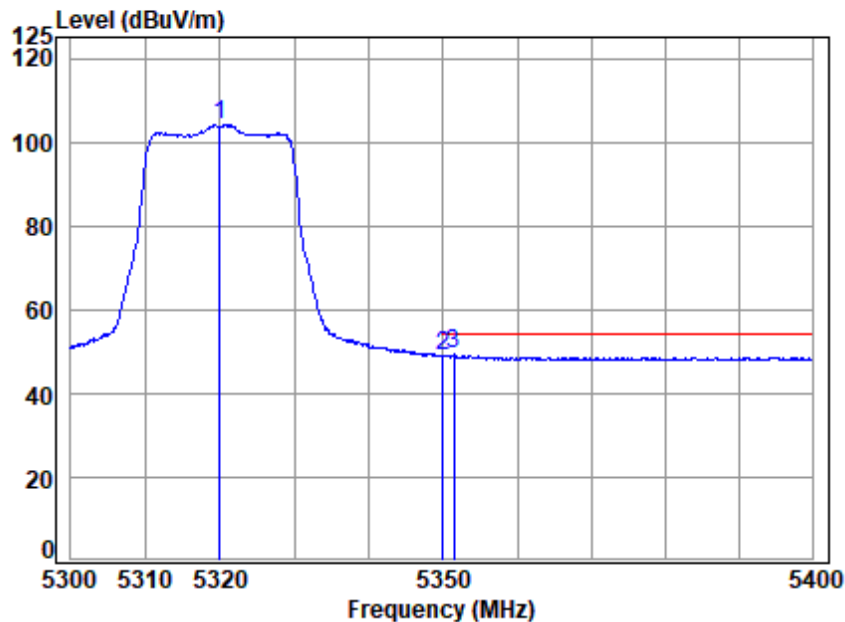

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11AX20


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5320.000	19.07	34.28	31.37	82.07	104.05	-----	----- Average
2	5350.020	19.11	34.40	31.39	26.85	48.97	54.00	-5.03 Average
3 q	5351.467	19.11	34.41	31.39	27.23	49.36	54.00	-4.64 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

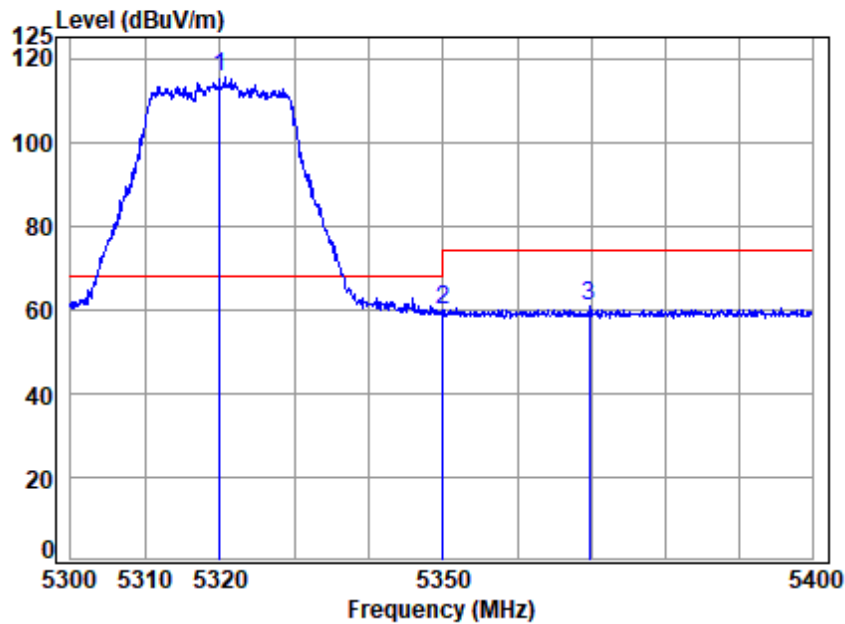

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5320.000		19.07	34.28	31.37	93.69	115.67	68.20	47.47	Peak
2 5350.020		19.11	34.40	31.39	37.68	59.80	74.00	-14.20	Peak
3 5369.804		19.14	34.48	31.40	38.39	60.61	74.00	-13.39	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

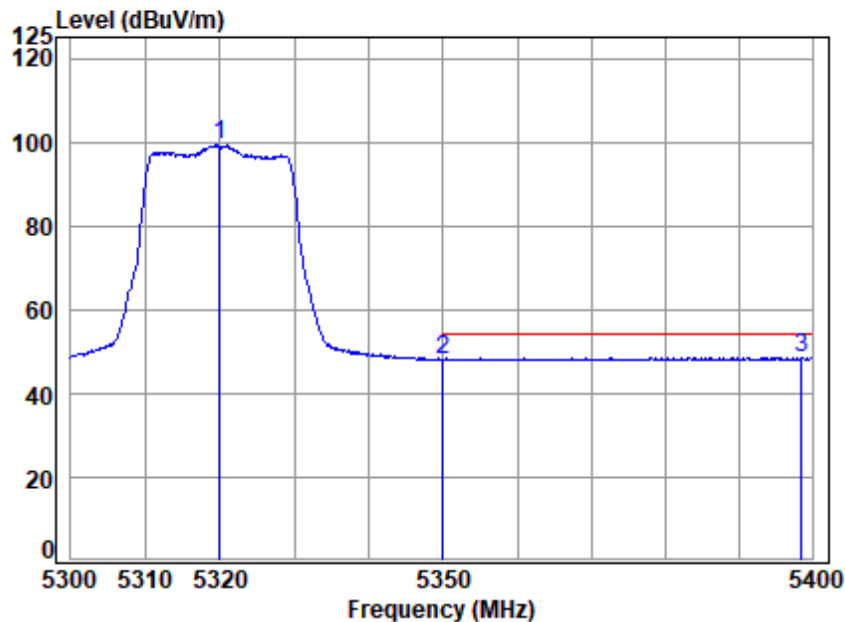

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5320 Band edge
: 5G WIFI 11AX20


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	19.07	34.28	31.37	77.29	99.27	-----	-----	Average
2 5350.020	19.11	34.40	31.39	26.10	48.22	54.00	-5.78	Average
3 q 5398.587	19.18	34.59	31.41	26.28	48.64	54.00	-5.36	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

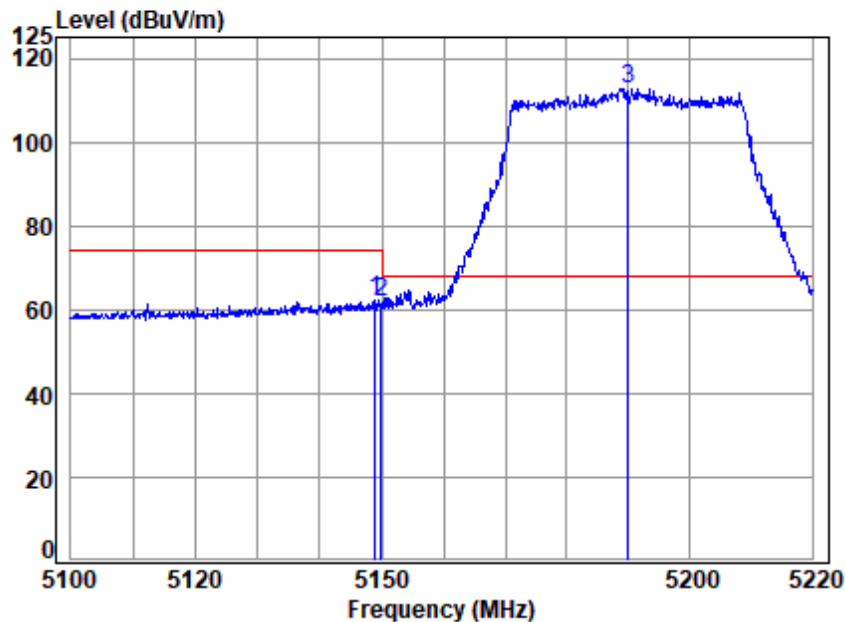


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.982	18.83	33.90	31.28	40.66	62.11	74.00	-11.89	peak
2	5149.980	18.83	33.90	31.28	40.18	61.63	74.00	-12.37	peak
3 p	5190.000	18.89	33.98	31.30	91.06	112.63	68.20	44.43	peak



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

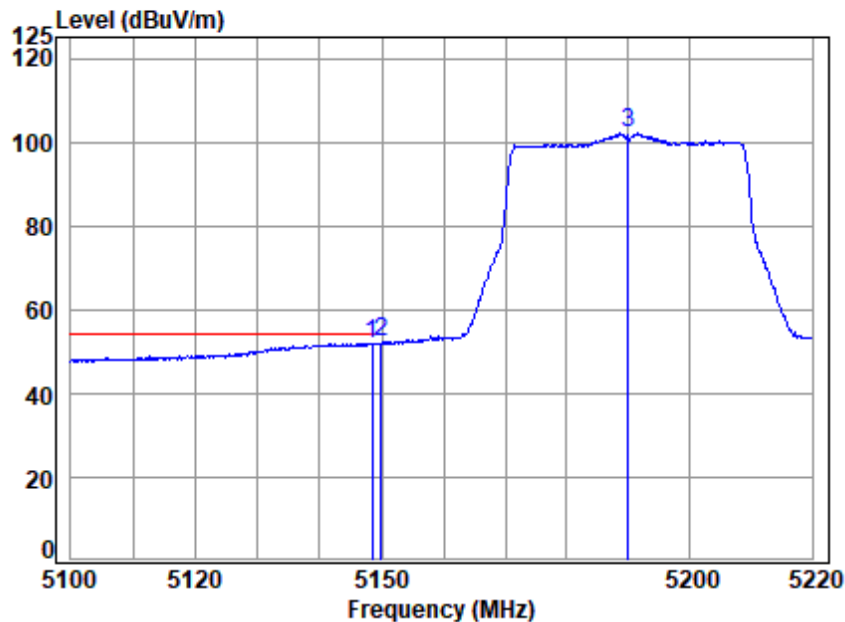


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.503	18.83	33.90	31.28	30.47	51.92	54.00	-2.08 Average
2 q	5149.980	18.83	33.90	31.28	30.71	52.16	54.00	-1.84 Average
3	5190.000	18.89	33.98	31.30	80.44	102.01	-----	----- Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

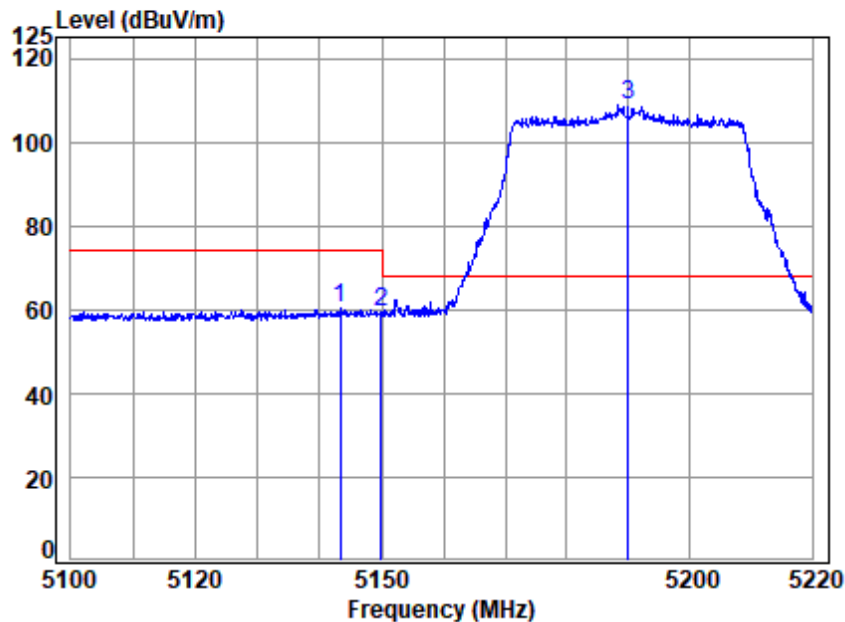


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5190 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5143.238	18.82	33.91	31.28	38.69	60.14	74.00	-13.86 Peak
2	5149.980	18.83	33.90	31.28	37.96	59.41	74.00	-14.59 Peak
3 p	5190.000	18.89	33.98	31.30	87.08	108.65	68.20	40.45 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

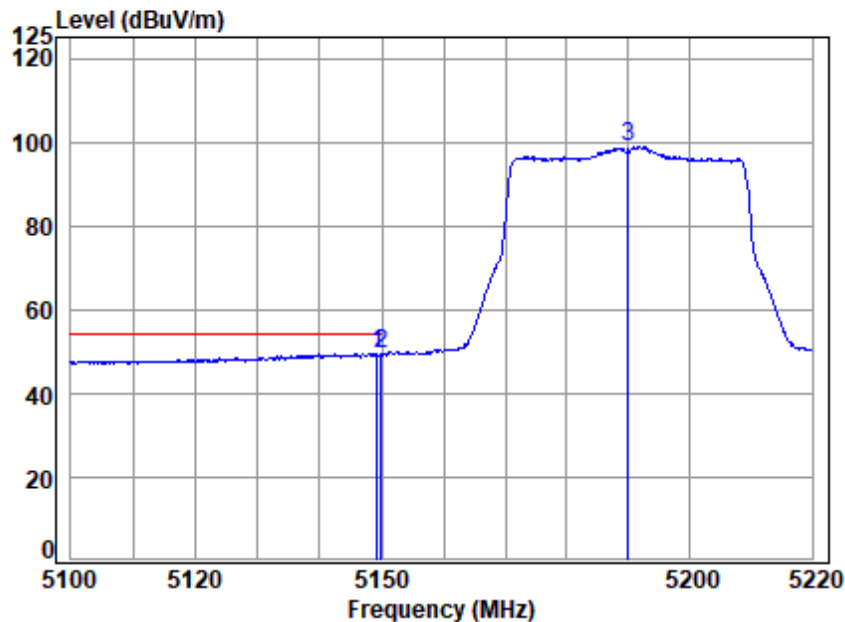


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5190 Band edge
 : 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5149.342	18.83	33.90	31.28	28.16	49.61	54.00	-4.39	Average
2 5149.980	18.83	33.90	31.28	27.87	49.32	54.00	-4.68	Average
3 5190.000	18.89	33.98	31.30	77.11	98.68	-----	-----	Average



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

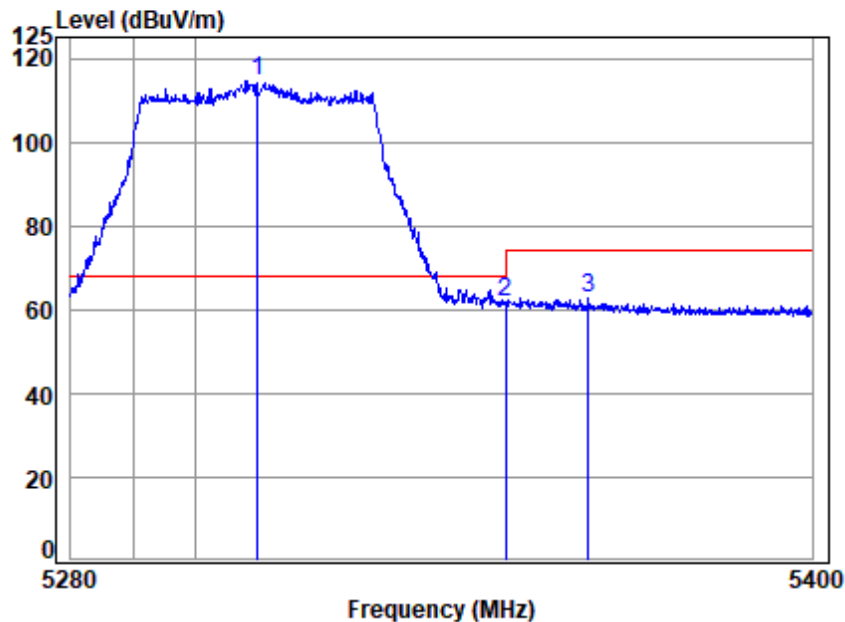


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5310.000	19.06	34.24	31.36	92.73	114.67	68.20	46.47	peak
2	5350.020	19.11	34.40	31.39	39.63	61.75	74.00	-12.25	peak
3	5363.476	19.13	34.45	31.39	40.65	62.84	74.00	-11.16	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

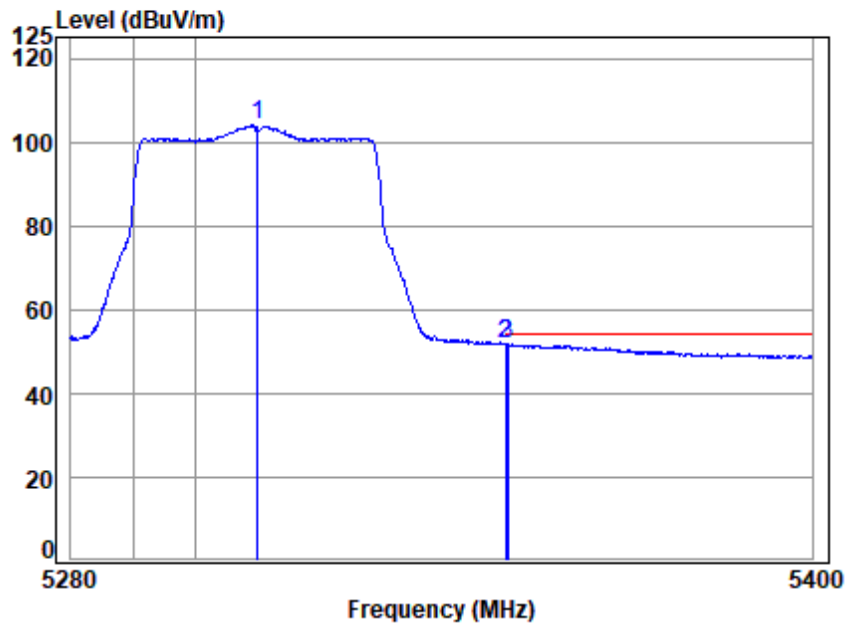


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	19.06	34.24	31.36	81.94	103.88	-----	----- Average
2	5350.020	19.11	34.40	31.39	29.67	51.79	54.00	-2.21 Average
3 q	5350.474	19.11	34.40	31.39	29.74	51.86	54.00	-2.14 Average



Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

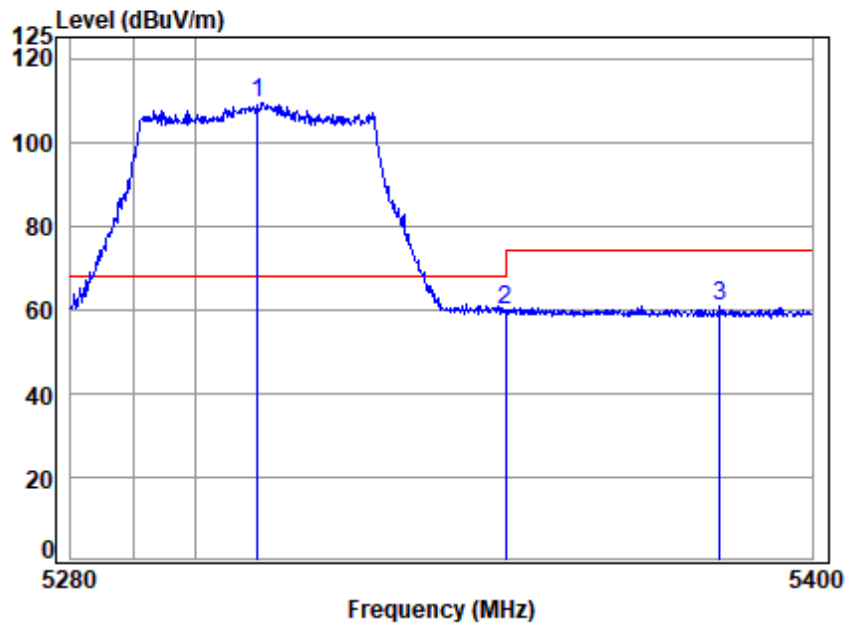


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5310.000	19.06	34.24	31.36	87.29	109.23	68.20	41.03	Peak
2	5350.020	19.11	34.40	31.39	37.70	59.82	74.00	-14.18	Peak
3	5384.973	19.16	34.54	31.40	38.67	60.97	74.00	-13.03	Peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

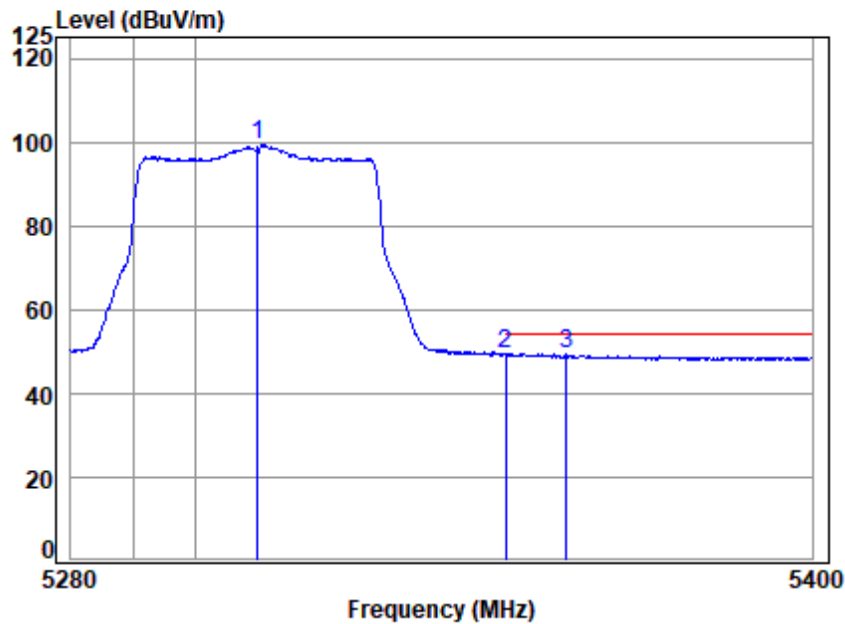


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5310 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	19.06	34.24	31.36	77.28	99.22	-----	Average
2 q	5350.020	19.11	34.40	31.39	27.49	49.61	54.00	-4.39 Average
3	5359.860	19.12	34.44	31.39	27.29	49.46	54.00	-4.54 Average



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: Low

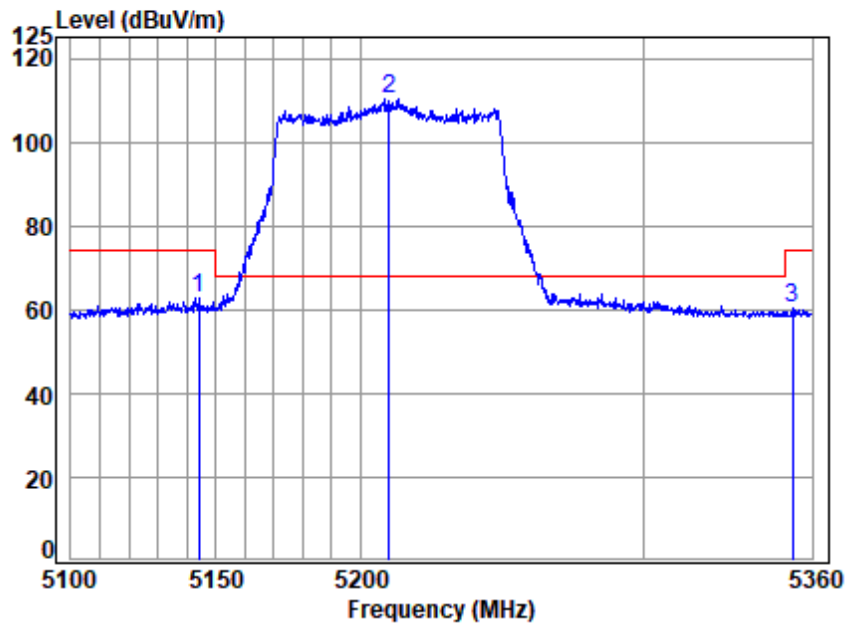


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5210 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.060	18.83	33.91	31.28	41.47	62.93	74.00	-11.07	peak
2 p	5210.000	18.92	34.02	31.31	88.77	110.40	68.20	42.20	peak
3	5352.809	19.11	34.41	31.39	38.06	60.19	74.00	-13.81	peak



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: Low

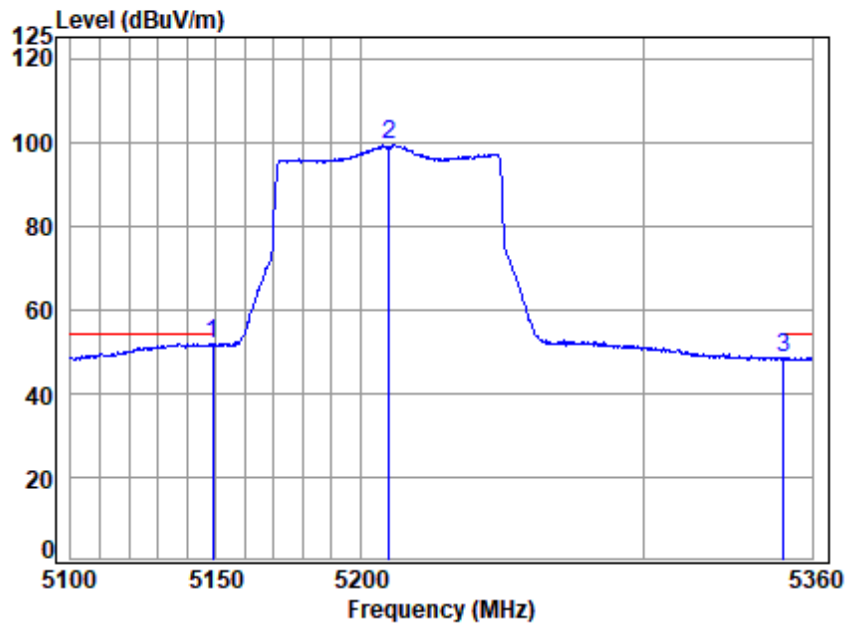


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5210 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5148.667	18.83	33.90	31.28	30.47	51.92	54.00	-2.08	Average
2 5210.000	18.92	34.02	31.31	77.82	99.45	-----	-----	Average
3 5349.882	19.11	34.40	31.39	26.36	48.48	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

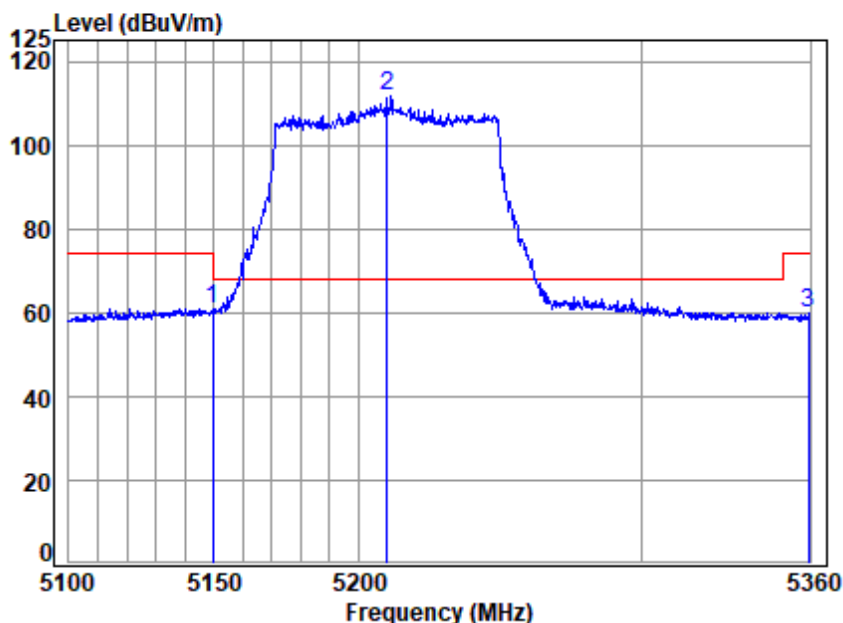


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5210 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.435	18.83	33.90	31.28	39.62	61.07	74.00	-12.93	Peak
2 p	5210.000	18.92	34.02	31.31	90.28	111.91	68.20	43.71	Peak
3	5359.467	19.12	34.44	31.39	37.51	59.68	74.00	-14.32	Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

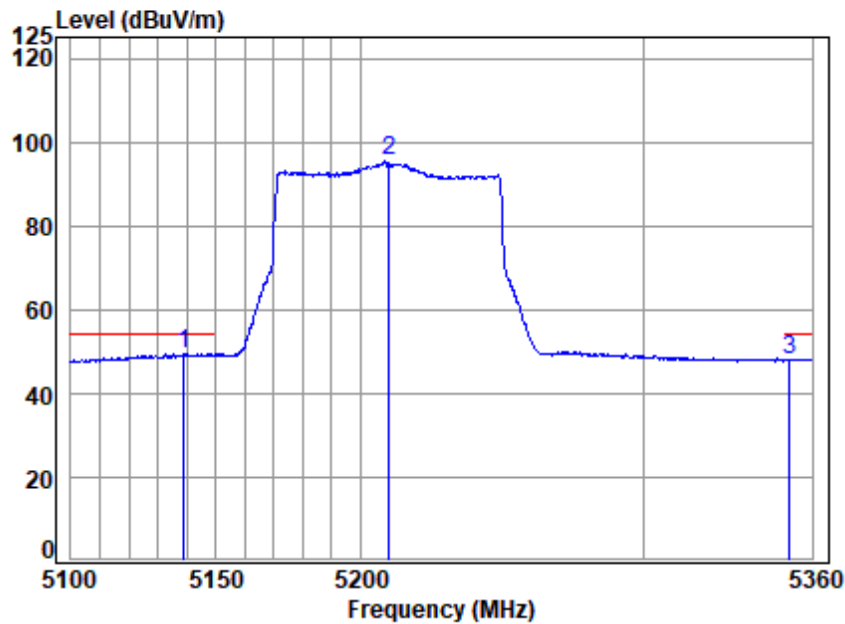


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5210 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5138.947	18.82	33.92	31.28	28.04	49.50	54.00	-4.50	Average
2 5210.000	18.92	34.02	31.31	73.67	95.30	-----	-----	Average
3 5351.744	19.11	34.41	31.39	26.07	48.20	54.00	-5.80	Average



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

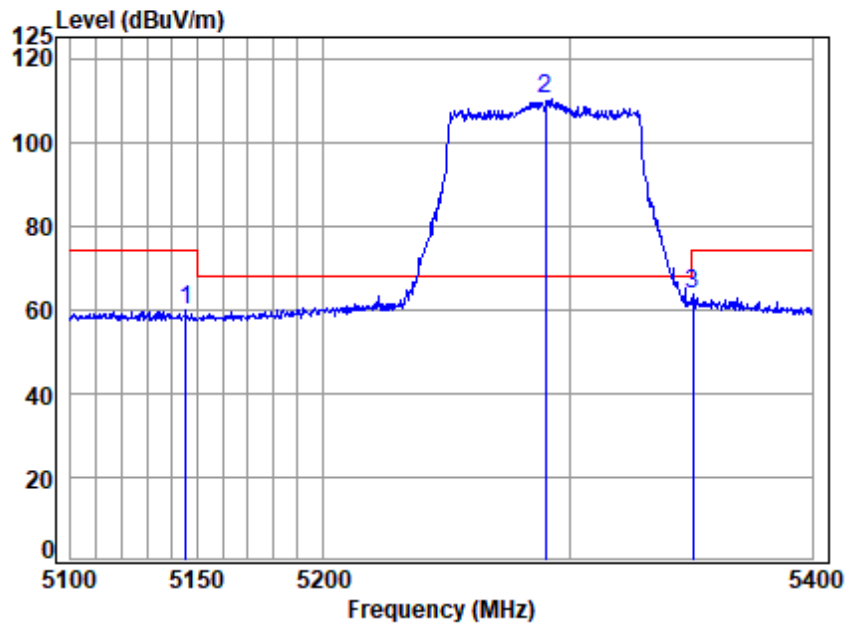

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5290 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.679	18.83	33.91	31.28	38.33	59.79	74.00	-14.21	peak
2 p	5290.000	19.03	34.18	31.35	88.52	110.38	68.20	42.18	peak
3	5350.535	19.11	34.40	31.39	41.47	63.59	74.00	-10.41	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 235 of 715

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

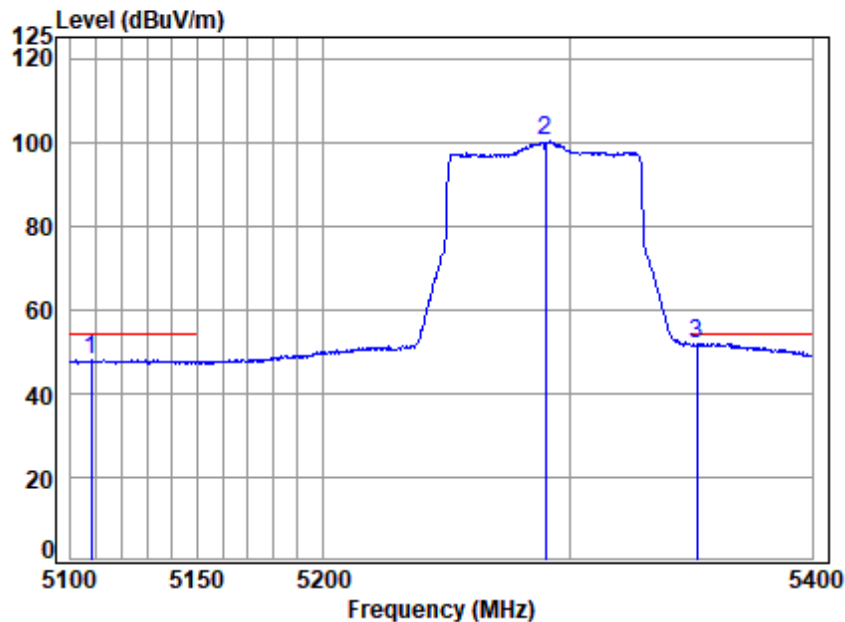

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5290 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5108.169	18.77	33.98	31.26	26.53	48.02	54.00	-5.98 Average
2	5290.000	19.03	34.18	31.35	78.24	100.10	-----	----- Average
3 q	5352.370	19.11	34.41	31.39	29.65	51.78	54.00	-2.22 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

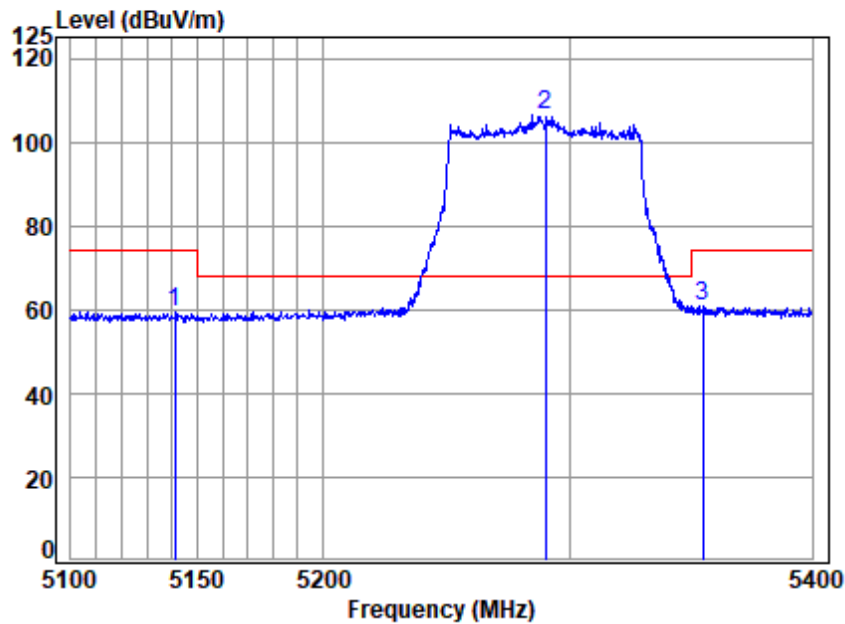

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5290 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5141.269	18.82	33.92	31.28	37.85	59.31	74.00	-14.69	Peak
2 p	5290.000	19.03	34.18	31.35	84.39	106.25	68.20	38.05	Peak
3	5354.818	19.12	34.42	31.39	38.81	60.96	74.00	-13.04	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

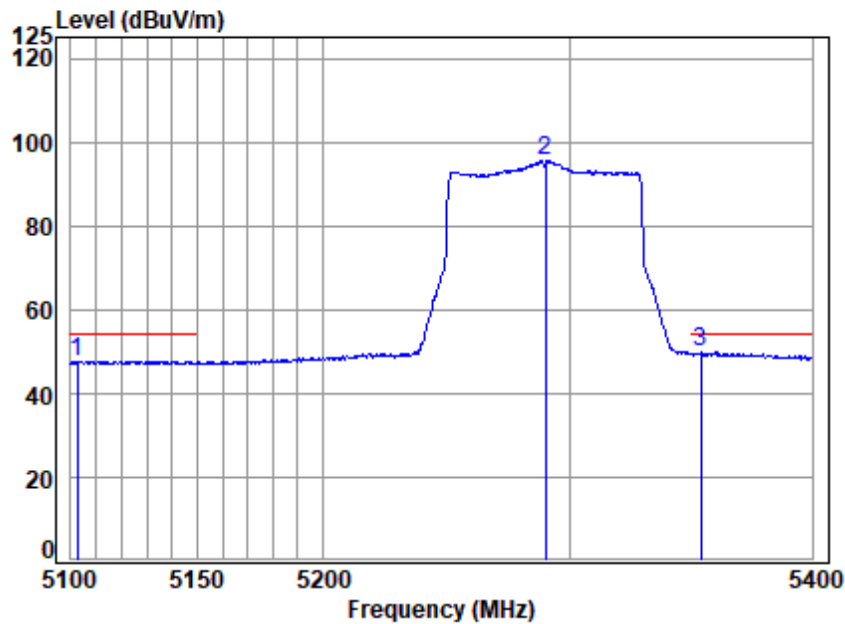

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5290 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5102.624	18.77	33.99	31.26	26.22	47.72	54.00	-6.28 Average
2	5290.000	19.03	34.18	31.35	73.80	95.66	-----	----- Average
3 q	5353.899	19.12	34.42	31.39	27.61	49.76	54.00	-4.24 Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 238 of 715

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

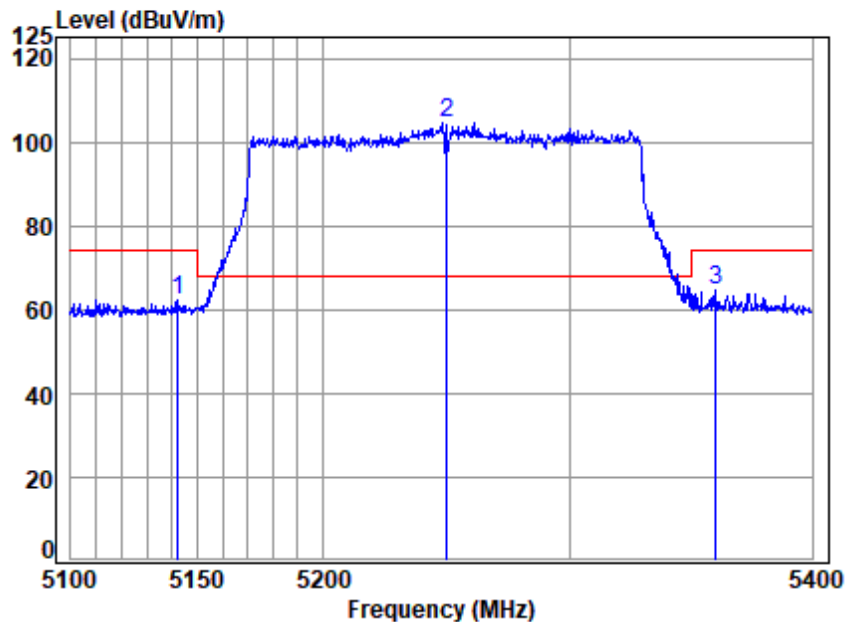

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5250 Band edge
: 5G WIFI 11AX160


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5142.444	18.82	33.92	31.28	40.65	62.11	74.00	-11.89	peak
2 p	5250.000	18.97	34.10	31.33	82.91	104.65	68.20	36.45	peak
3	5360.023	19.12	34.44	31.39	42.23	64.40	74.00	-9.60	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

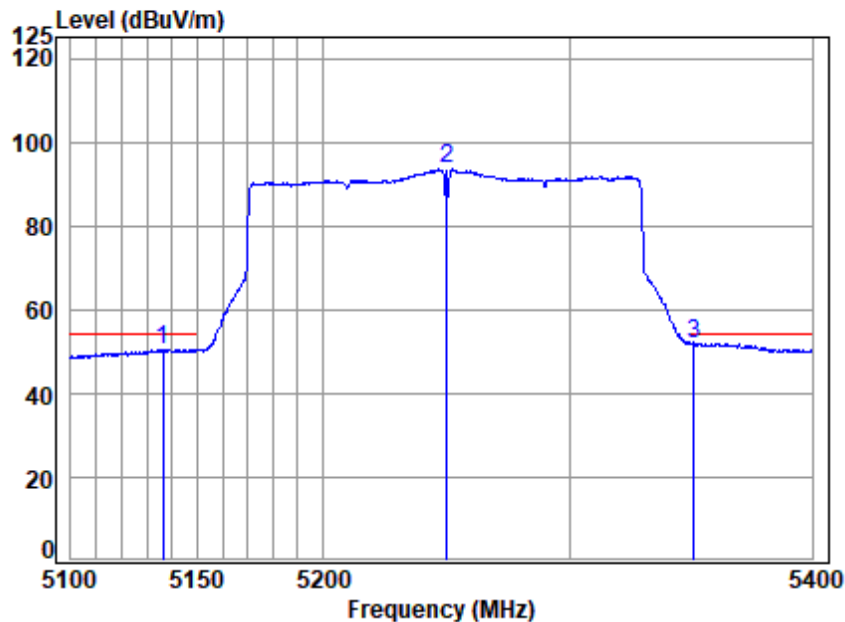


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5250 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5136.569	18.82	33.93	31.27	28.99	50.47	54.00	-3.53 Average
2	5250.000	18.97	34.10	31.33	71.71	93.45	-----	----- Average
3 q	5351.146	19.11	34.40	31.39	29.90	52.02	54.00	-1.98 Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

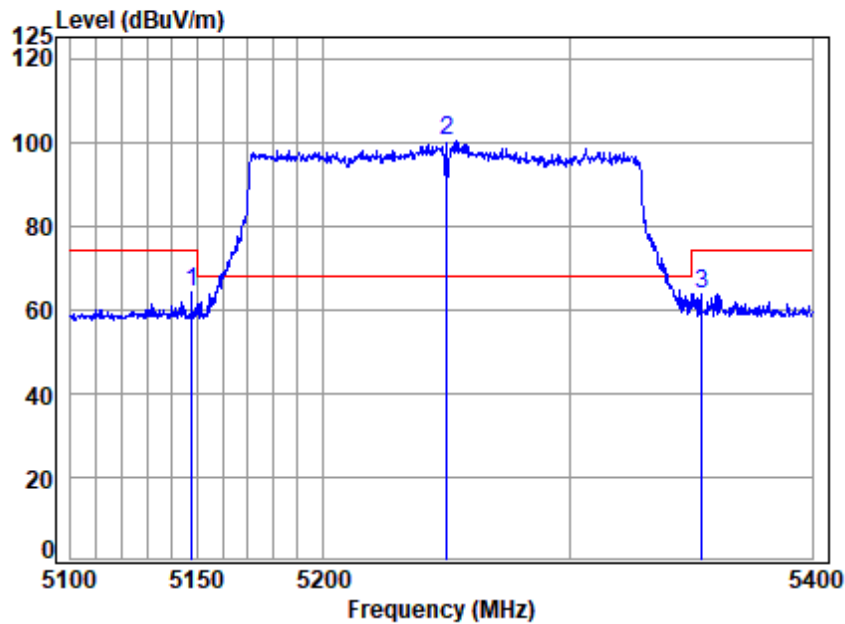


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5250 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.738	18.83	33.90	31.28	42.70	64.15	74.00	-9.85	Peak
2 p	5250.000	18.97	34.10	31.33	78.39	100.13	68.20	31.93	Peak
3	5354.206	19.12	34.42	31.39	41.50	63.65	74.00	-10.35	Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

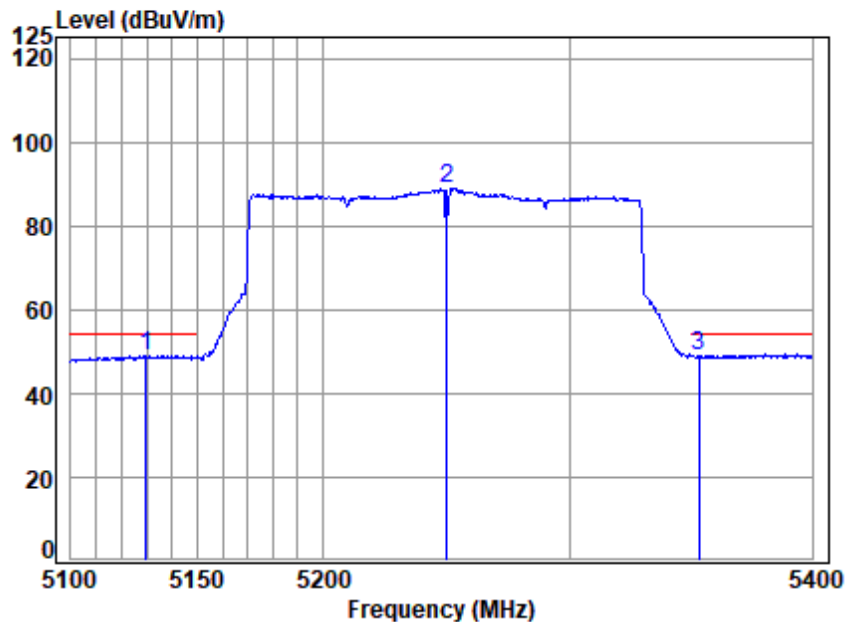


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5250 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5129.821	18.81	33.94	31.27	27.52	49.00	54.00	-5.00 Average
2	5250.000	18.97	34.10	31.33	67.17	88.91	-----	----- Average
3 q	5353.288	19.11	34.41	31.39	27.05	49.18	54.00	-4.82 Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

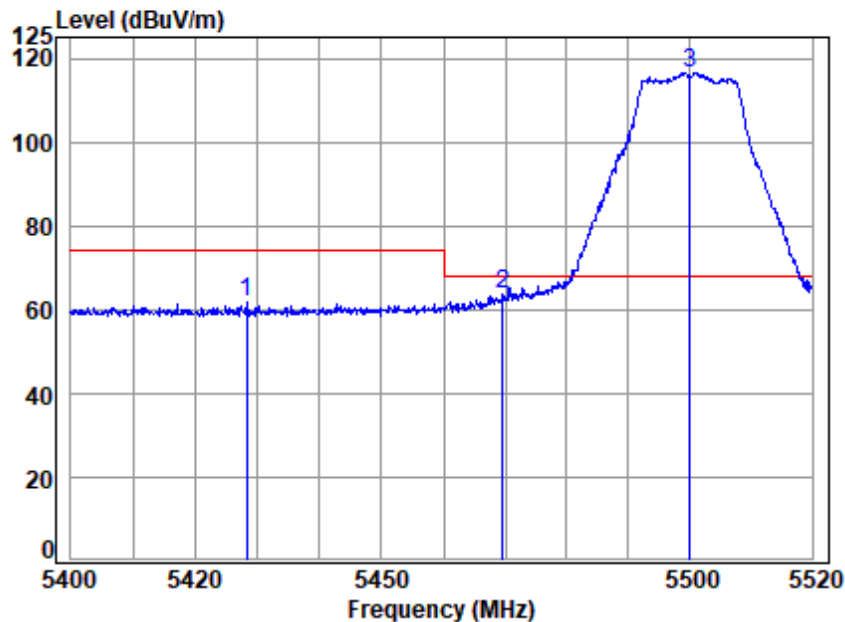


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5428.202	19.21	34.66	31.43	39.38	61.82	74.00	-12.18	peak
2	5469.639	19.27	34.62	31.45	41.12	63.56	68.20	-4.64	peak
3 p	5500.000	19.31	34.50	31.46	94.21	116.56	68.20	48.36	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

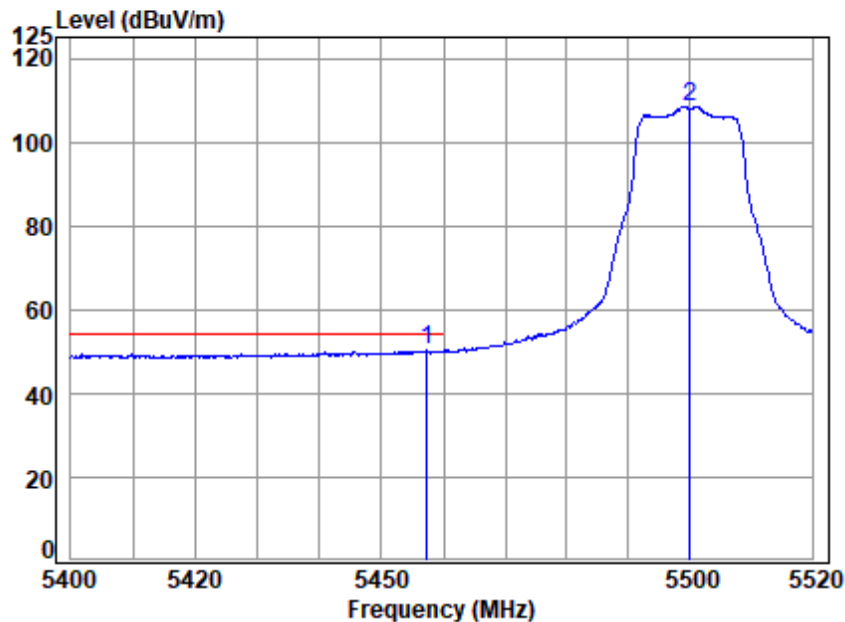


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5500 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5457.271	19.25	34.67	31.44	27.77	50.25	54.00	-3.75 Average
2	5500.000	19.31	34.50	31.46	86.19	108.54	-----	----- Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

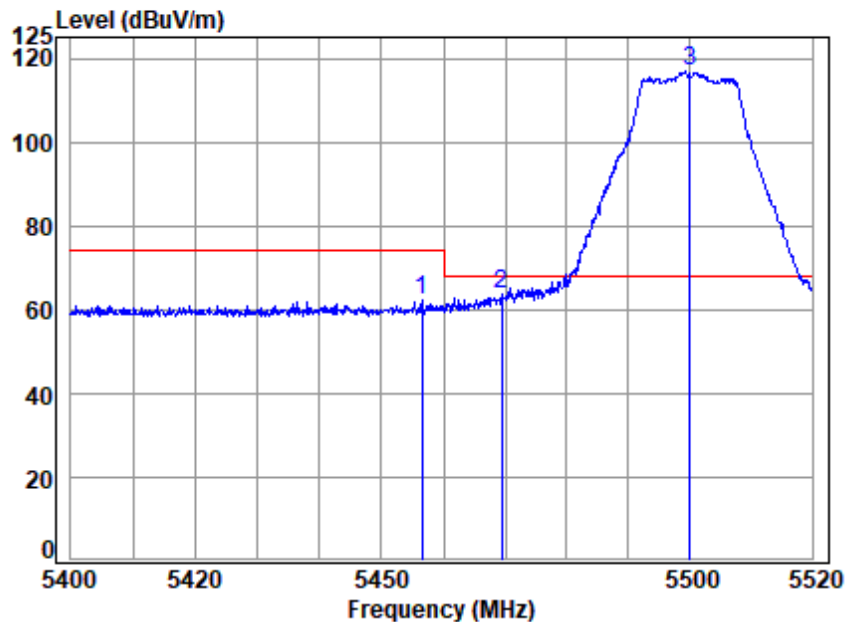


Site : chamber
 Condition: 3m VERTICAL
 Job No : 03755AT\03756AT
 Mode : 5500 Band edge
 : 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5456.551	19.25	34.67	31.44	39.78	62.26	74.00	-11.74	Peak
2	5469.399	19.27	34.62	31.45	41.45	63.89	68.20	-4.31	peak
3 p	5500.000	19.31	34.50	31.46	94.79	117.14	68.20	48.94	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

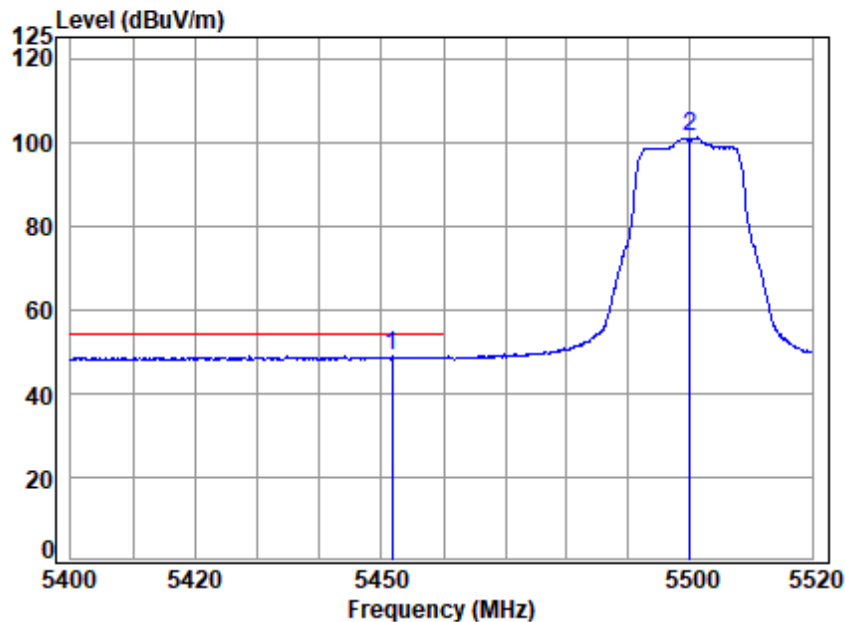


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5451.636	19.25	34.69	31.44	26.41	48.91	54.00	-5.09	Average
2 5500.000	19.31	34.50	31.46	78.78	101.13	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

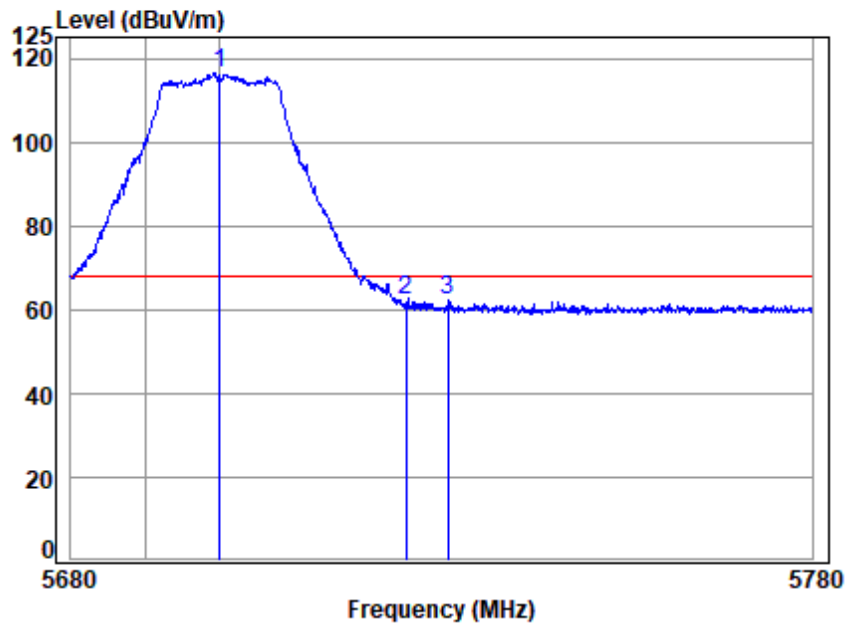


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5700 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5700.000	19.44	34.30	31.56	94.19	116.37	68.20	48.17	peak
2 5725.000	19.46	34.25	31.57	40.05	62.19	68.20	-6.01	peak
3 5730.682	19.46	34.24	31.57	40.22	62.35	68.20	-5.85	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

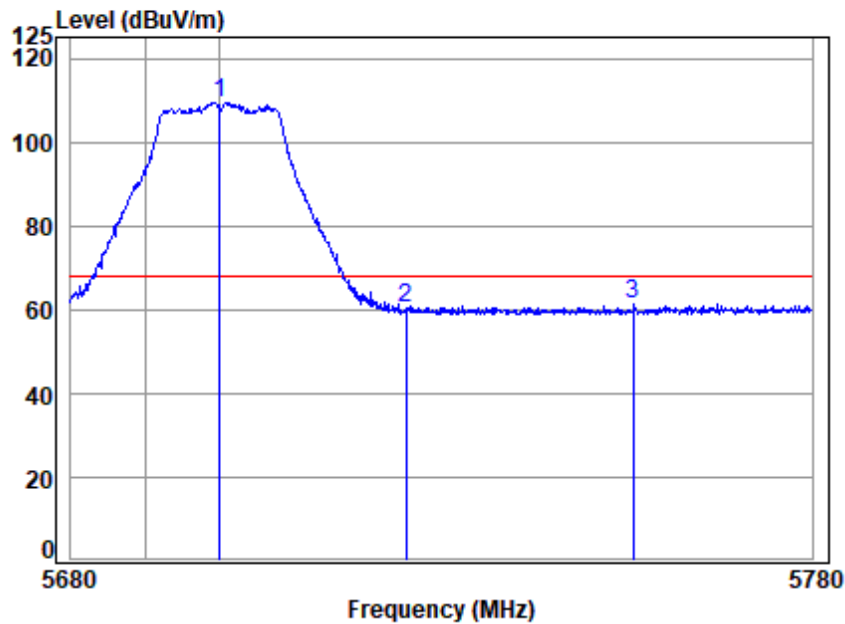


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5700 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5700.000	19.44	34.30	31.56	87.25	109.43	68.20	41.23	Peak
2	5725.000	19.46	34.25	31.57	38.24	60.38	68.20	-7.82	Peak
3	5755.740	19.48	34.21	31.59	39.26	61.36	68.20	-6.84	Peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

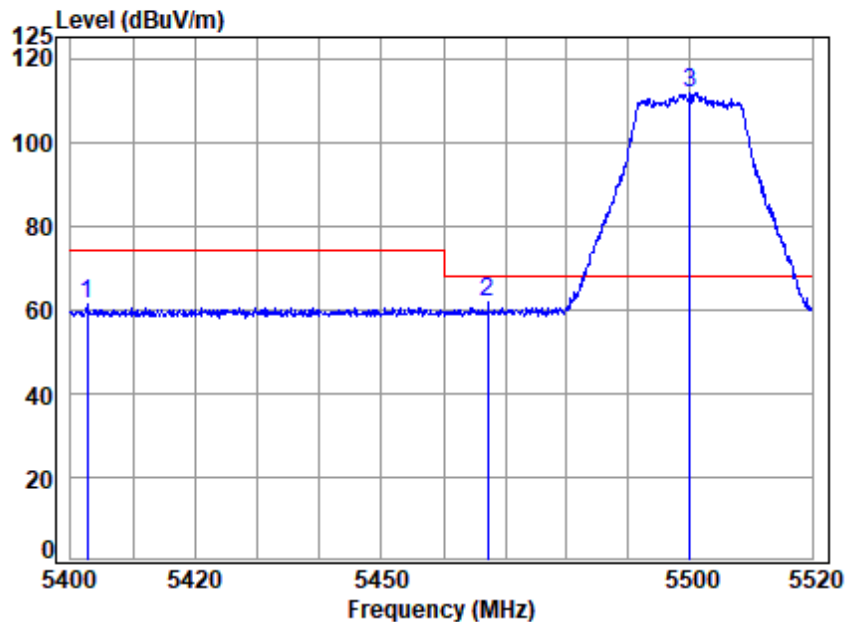


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5402.612	19.18	34.61	31.41	38.77	61.15	74.00	-12.85	peak
2	5467.235	19.27	34.63	31.44	39.16	61.62	68.20	-6.58	peak
3 p	5500.000	19.31	34.50	31.46	89.20	111.55	68.20	43.35	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

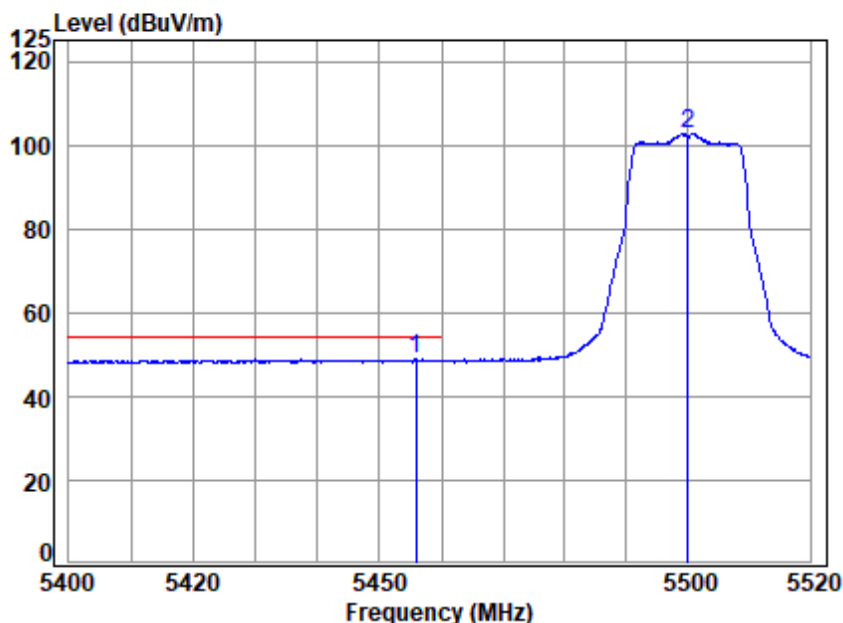


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5455.832	19.25	34.68	31.44	26.35	48.84	54.00	-5.16	Average
2 5500.000	19.31	34.50	31.46	80.30	102.65	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

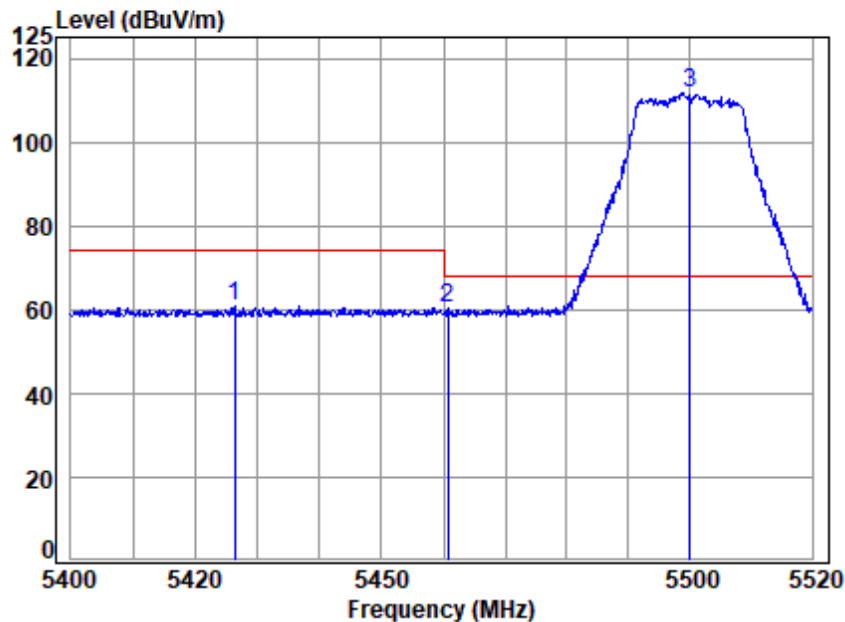

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5426.293	19.21	34.65	31.42	38.59	61.03	74.00	-12.97	Peak
2	5460.750	19.26	34.66	31.44	37.72	60.20	68.20	-8.00	peak
3 p	5500.000	19.31	34.50	31.46	89.19	111.54	68.20	43.34	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

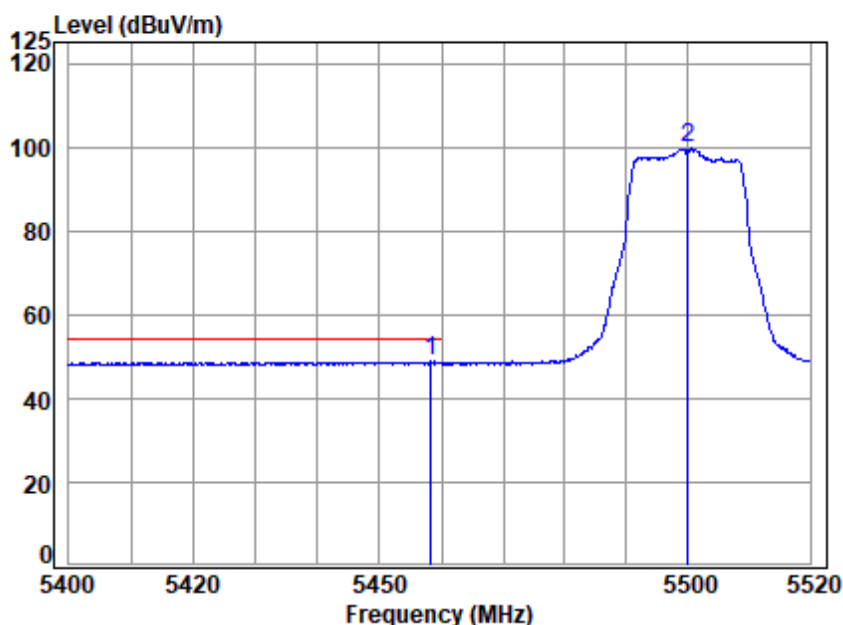


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5458.351	19.25	34.67	31.44	26.38	48.86	54.00	-5.14	Average
2 5500.000	19.31	34.50	31.46	77.39	99.74	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

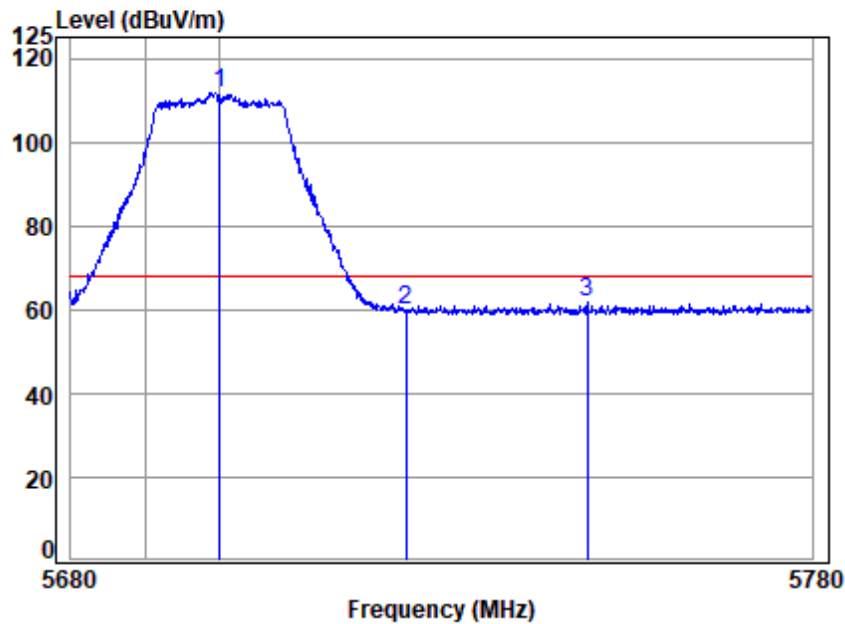

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5700 Band edge
: 5G WIFI 11N20


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5700.000	19.44	34.30	31.56	89.46	111.64	68.20	43.44	peak
2 5725.000	19.46	34.25	31.57	37.84	59.98	68.20	-8.22	peak
3 5749.516	19.47	34.20	31.58	39.53	61.62	68.20	-6.58	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

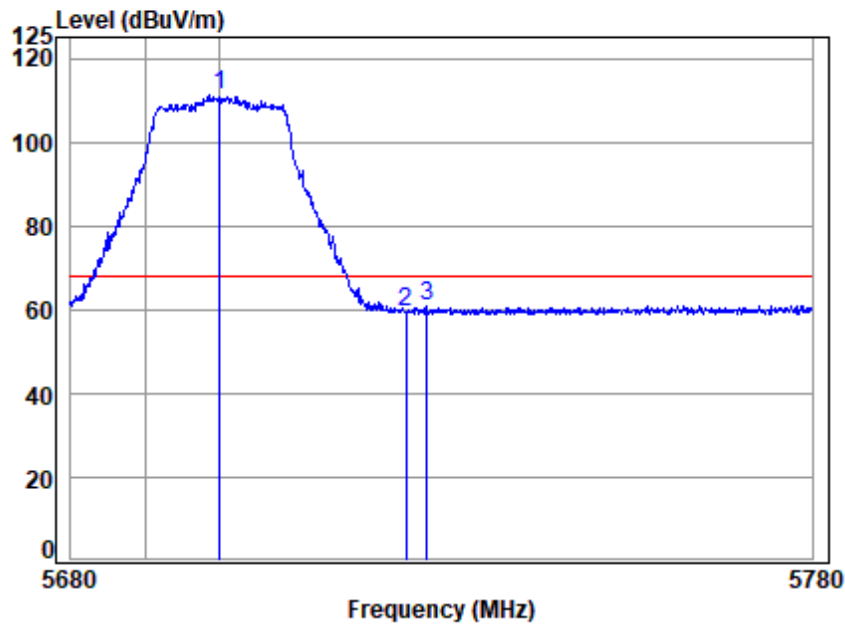

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5700 Band edge
: 5G WIFI 11N20


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5700.000	19.44	34.30	31.56	89.14	111.32	68.20	43.12	Peak
2 5725.000	19.46	34.25	31.57	37.50	59.64	68.20	-8.56	Peak
3 5727.782	19.46	34.24	31.57	38.58	60.71	68.20	-7.49	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

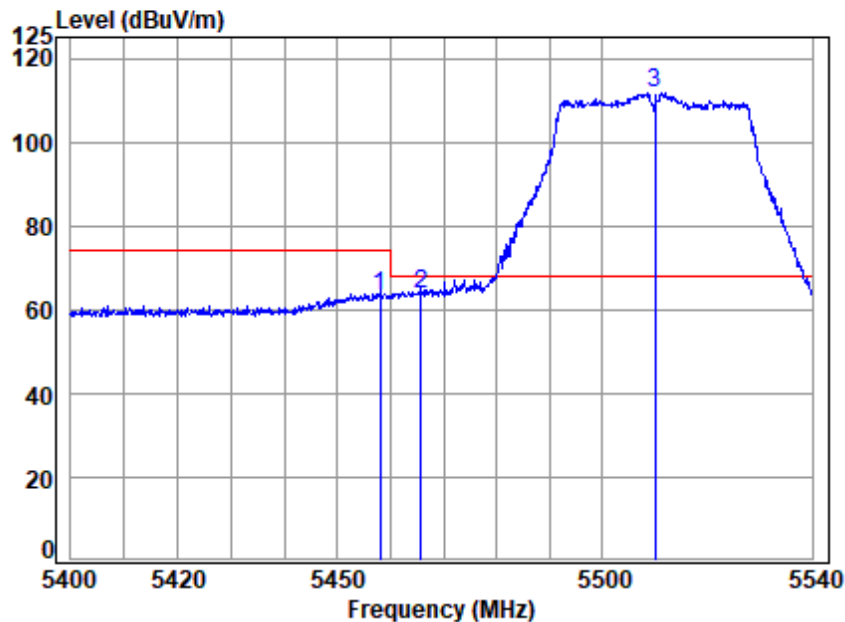

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11N40


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.084	19.25	34.67	31.44	40.93	63.41	74.00	-10.59	peak
2	5465.773	19.26	34.64	31.44	41.19	63.65	68.20	-4.55	peak
3 p	5510.000	19.32	34.54	31.47	89.21	111.60	68.20	43.40	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

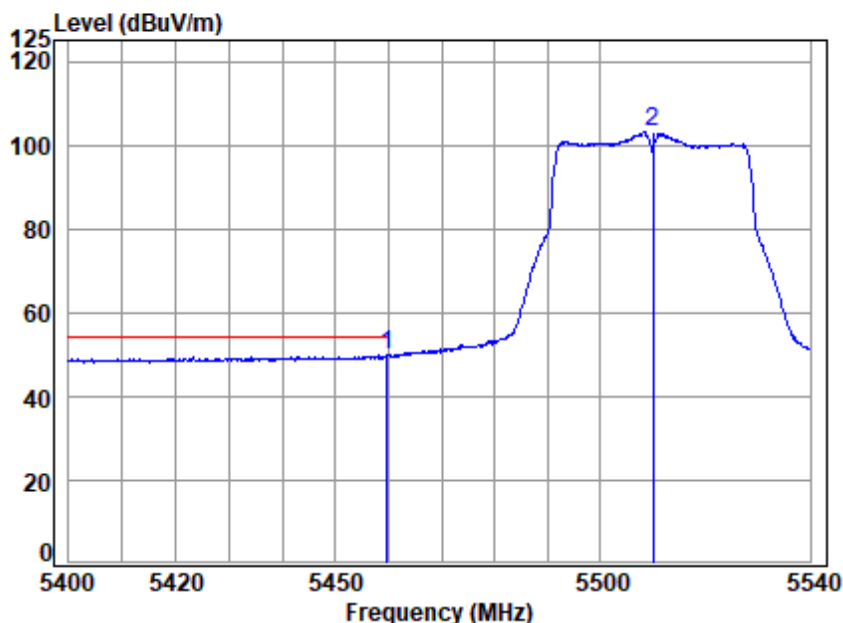

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11N40


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5459.761	19.26	34.66	31.44	27.29	49.77	54.00	-4.23	Average
2 5510.000	19.32	34.54	31.47	80.71	103.10	-----	-----	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

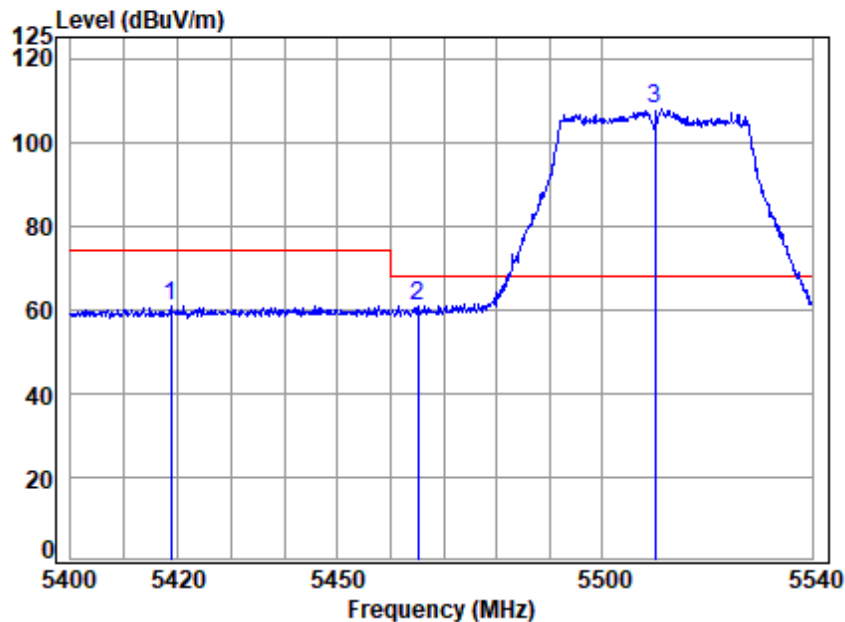


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5418.691	19.20	34.64	31.42	38.51	60.93	74.00	-13.07	Peak
2	5465.074	19.26	34.64	31.44	38.57	61.03	68.20	-7.17	peak
3 p	5510.000	19.32	34.54	31.47	85.27	107.66	68.20	39.46	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

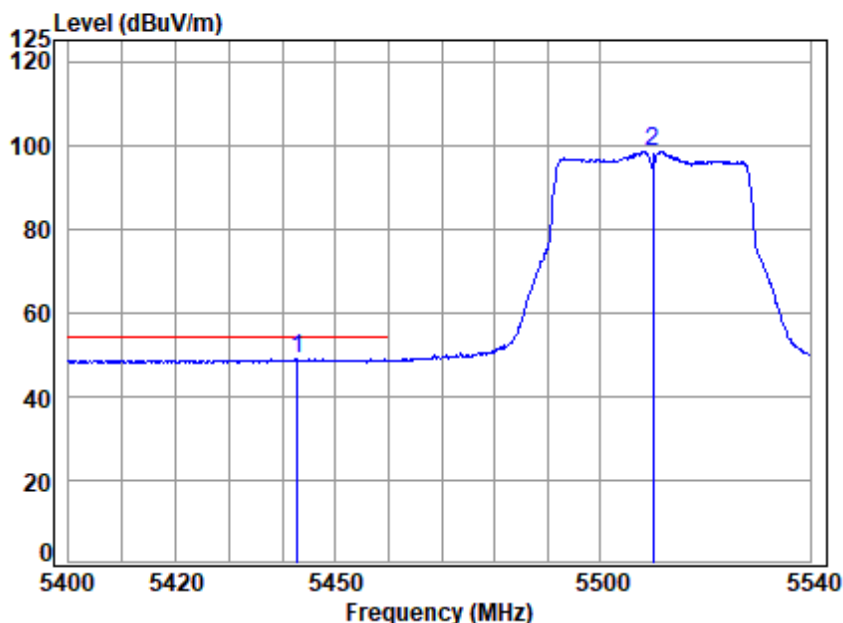


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5442.878	19.23	34.69	31.43	26.41	48.90	54.00	-5.10	Average
2 5510.000	19.32	34.54	31.47	75.99	98.38	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

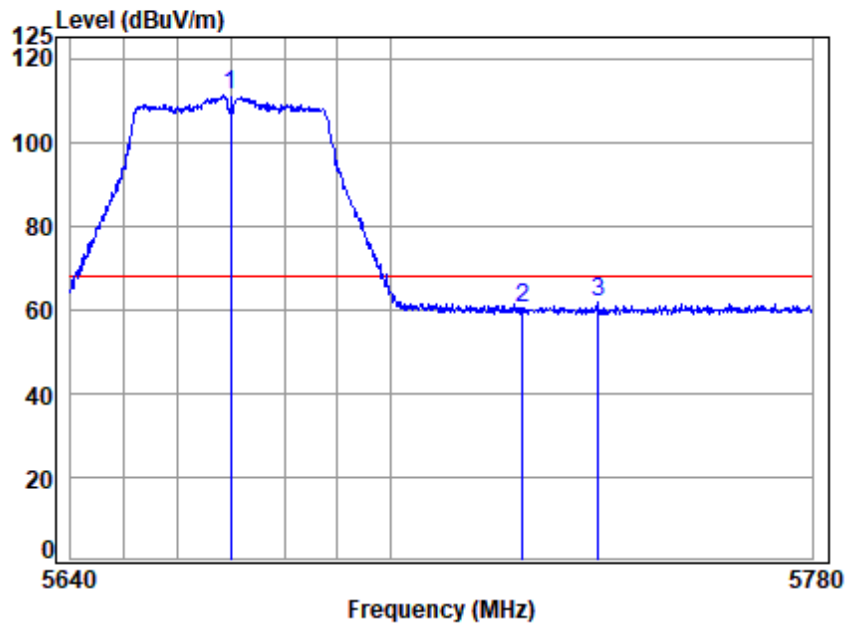


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5670 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5670.000	19.42	34.36	31.54	88.85	111.09	68.20	42.89 peak
2	5725.000	19.46	34.25	31.57	38.36	60.50	68.20	-7.70 peak
3	5739.187	19.47	34.22	31.58	39.59	61.70	68.20	-6.50 peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

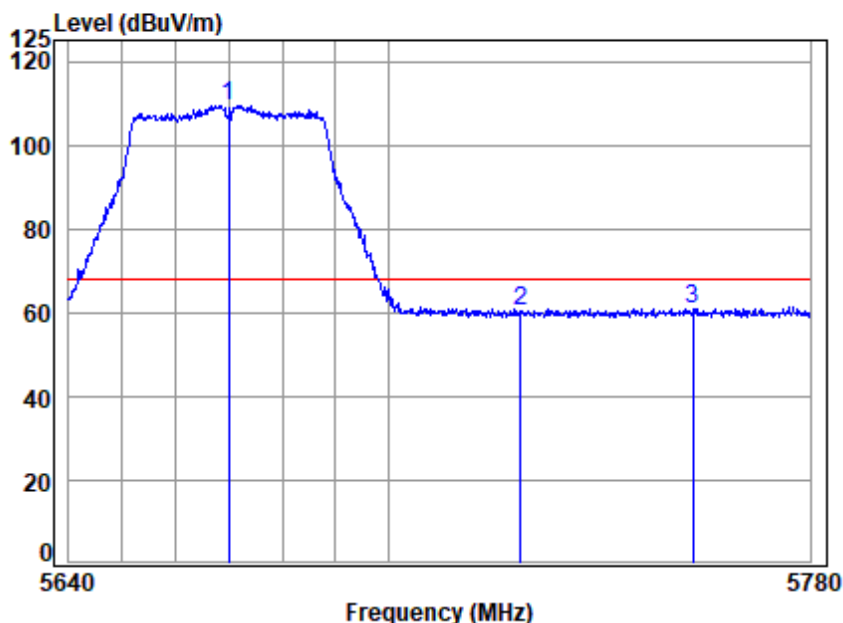

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5670 Band edge
: 5G WIFI 11N40


		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5670.000	19.42	34.36	31.54	87.25	109.49	68.20	41.29 Peak
2	5725.000	19.46	34.25	31.57	38.45	60.59	68.20	-7.61 Peak
3	5757.651	19.48	34.22	31.59	38.91	61.02	68.20	-7.18 Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: Low

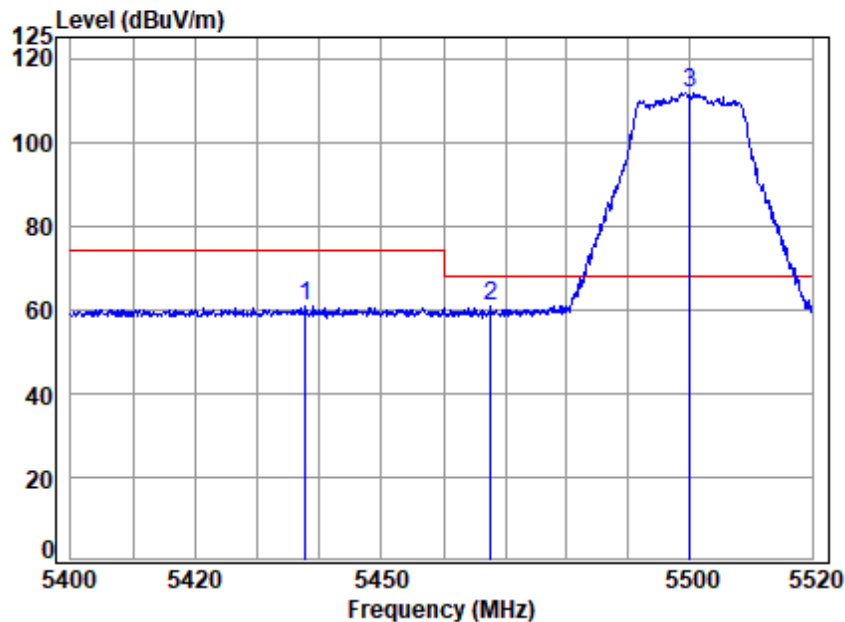


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5437.755	19.23	34.68	31.43	38.29	60.77	74.00	-13.23	peak
2	5467.716	19.27	34.63	31.45	38.16	60.61	68.20	-7.59	peak
3 p	5500.000	19.31	34.50	31.46	89.35	111.70	68.20	43.50	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

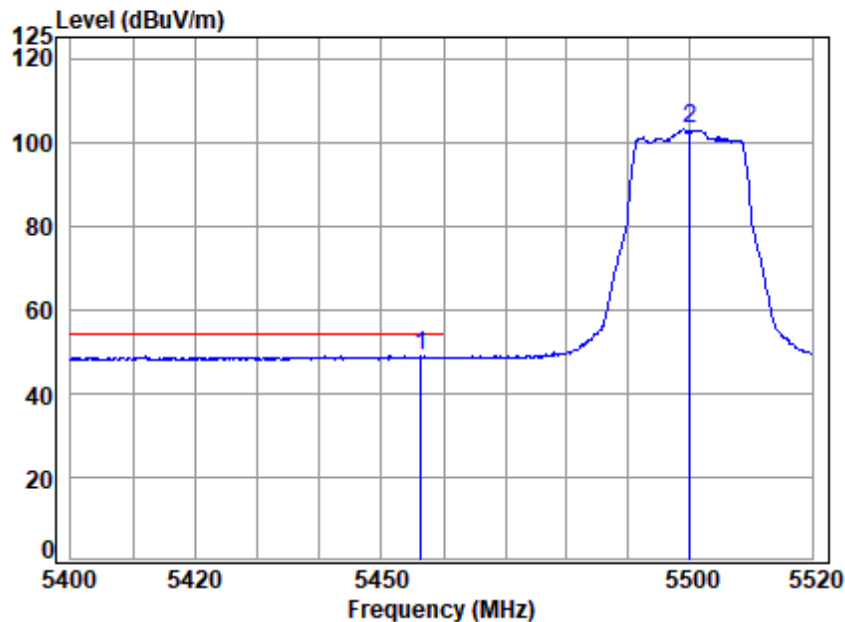


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5456.312	19.25	34.67	31.44	26.33	48.81	54.00	-5.19	Average
2 5500.000	19.31	34.50	31.46	80.61	102.96	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

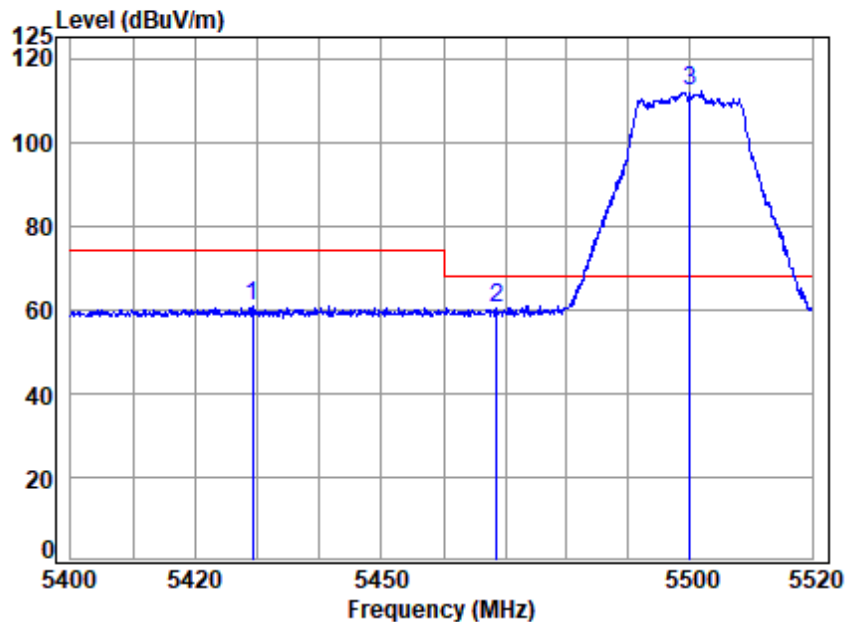


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5429.157	19.22	34.66	31.43	38.26	60.71	74.00	-13.29	Peak
2	5468.678	19.27	34.63	31.45	38.12	60.57	68.20	-7.63	peak
3 p	5500.000	19.31	34.50	31.46	89.71	112.06	68.20	43.86	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

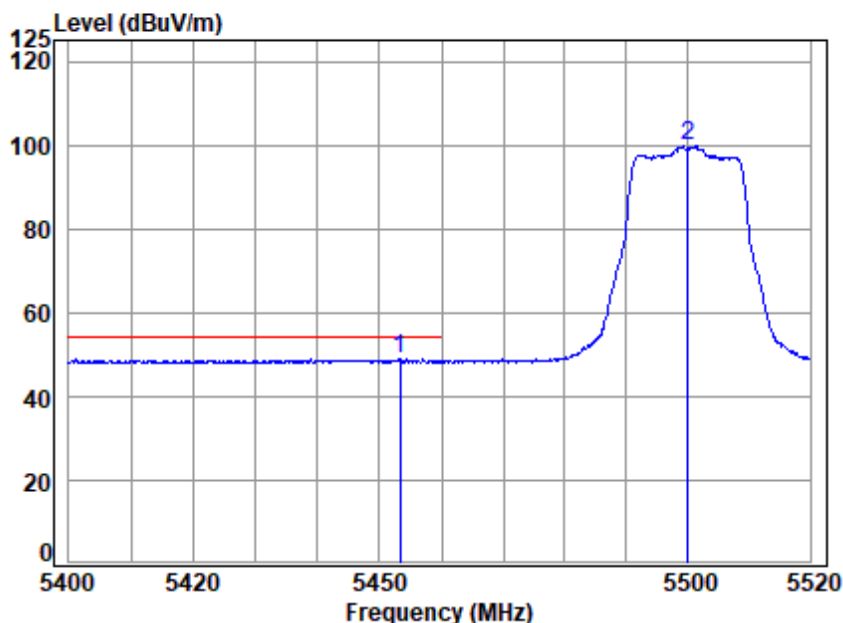


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5453.314	19.25	34.69	31.44	26.36	48.86	54.00	-5.14	Average
2 5500.000	19.31	34.50	31.46	77.34	99.69	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

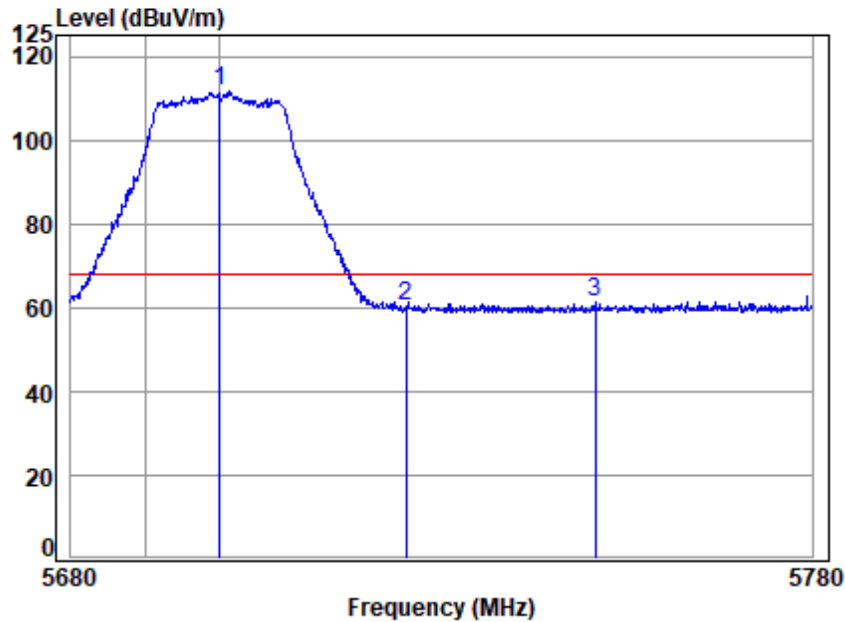

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5700 Band edge
: 5G WIFI 11AC20


		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5700.000	19.44	34.30	31.56	89.34	111.52	68.20	43.32	peak
2 5725.000	19.46	34.25	31.57	38.06	60.20	68.20	-8.00	peak
3 5750.519	19.47	34.20	31.58	39.18	61.27	68.20	-6.93	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

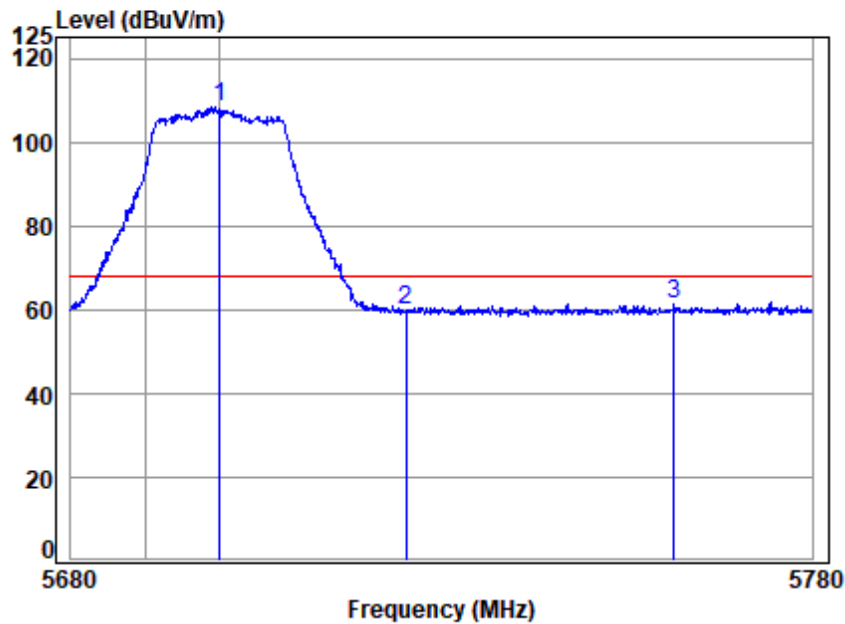

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5700 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5700.000	19.44	34.30	31.56	86.17	108.35	68.20	40.15	Peak
2 5725.000	19.46	34.25	31.57	37.92	60.06	68.20	-8.14	Peak
3 5761.268	19.48	34.22	31.59	39.38	61.49	68.20	-6.71	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

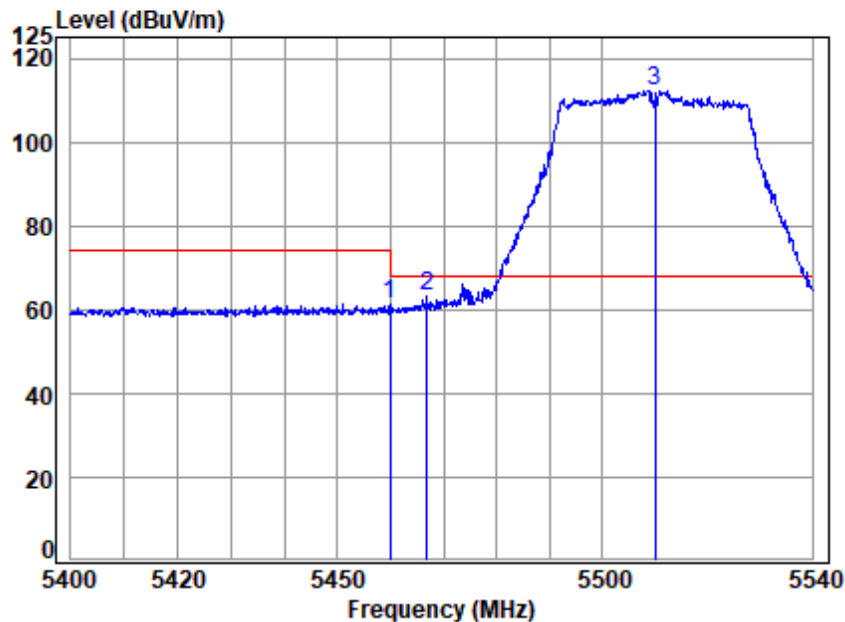

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5459.901	19.26	34.66	31.44	38.99	61.47	74.00	-12.53 peak
2	5466.893	19.27	34.63	31.44	40.52	62.98	68.20	-5.22 peak
3 p	5510.000	19.32	34.54	31.47	90.01	112.40	68.20	44.20 peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

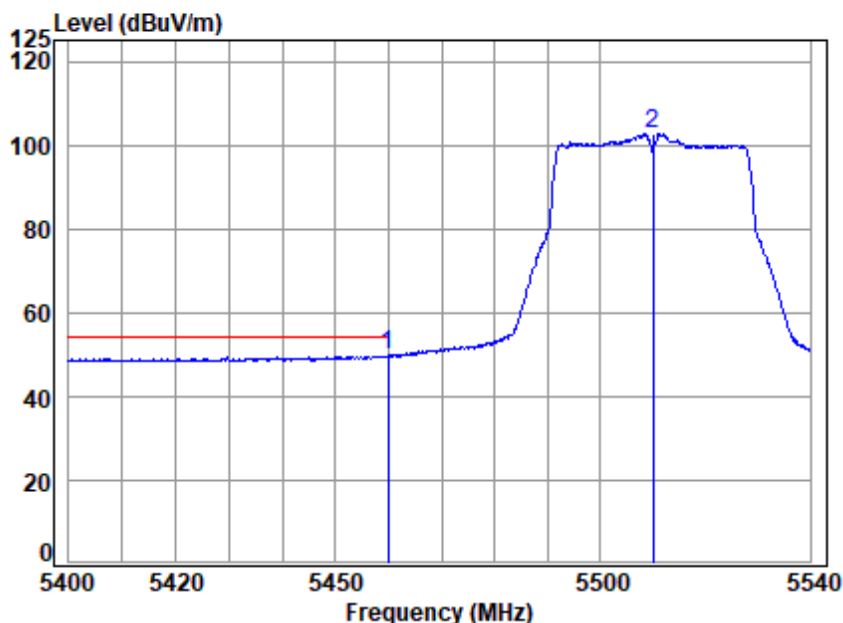


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5459.901	19.26	34.66	31.44	27.19	49.67	54.00	-4.33	Average
2 5510.000	19.32	34.54	31.47	80.19	102.58	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

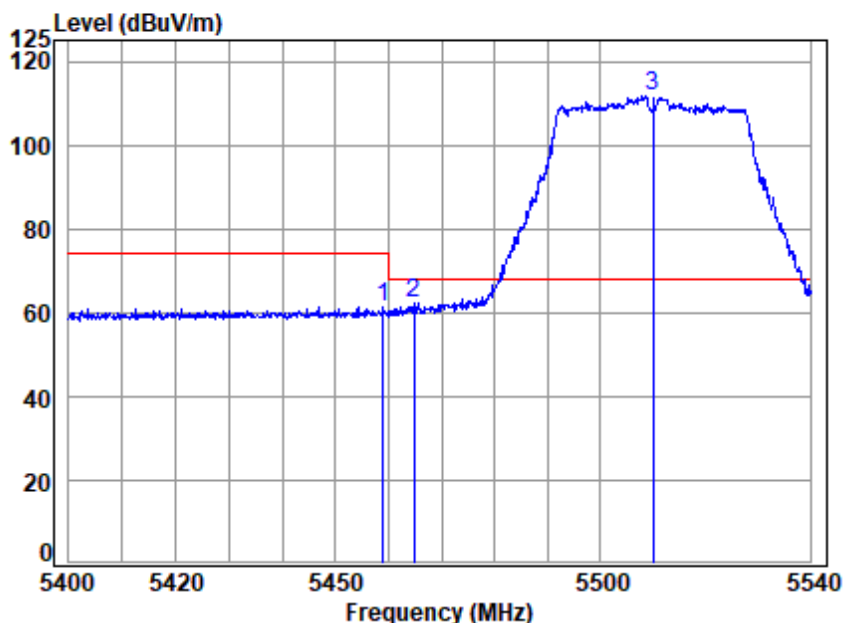


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.923	19.26	34.66	31.44	38.88	61.36	74.00	-12.64 Peak
2	5464.794	19.26	34.64	31.44	39.70	62.16	68.20	-6.04 peak
3 p	5510.000	19.32	34.54	31.47	89.14	111.53	68.20	43.33 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

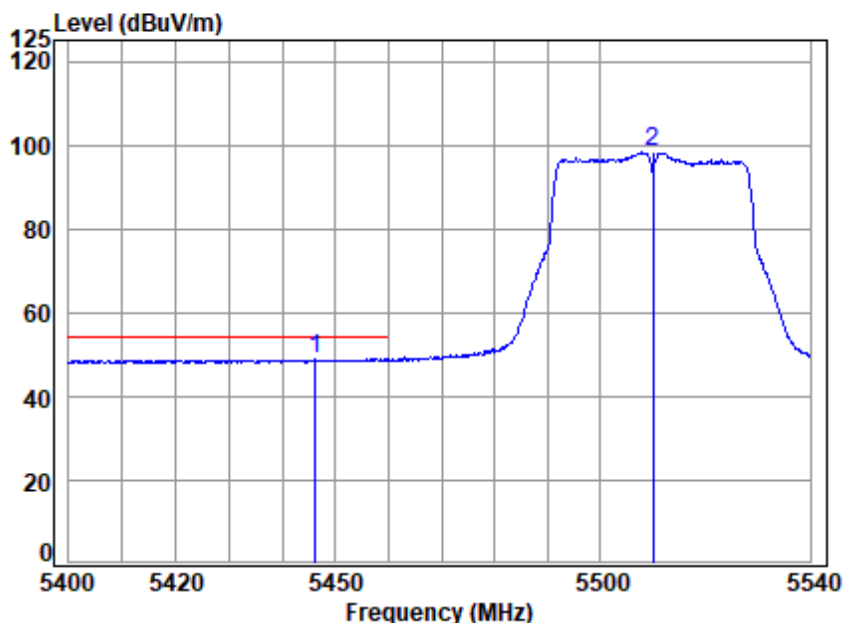


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5446.223	19.24	34.69	31.43	26.64	49.14	54.00	-4.86	Average
2 5510.000	19.32	34.54	31.47	76.07	98.46	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

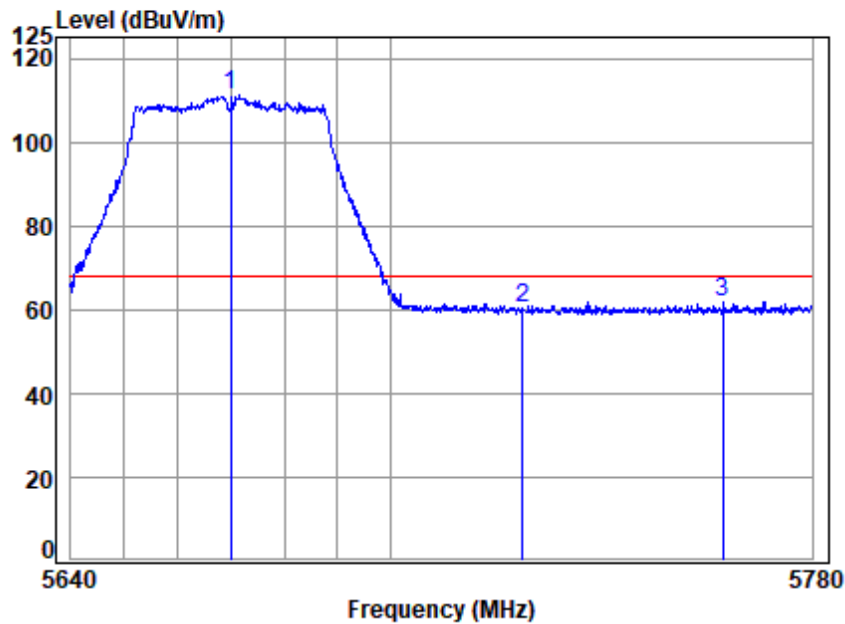


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5670 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p	5670.000	19.42	34.36	31.54	89.01	111.25	68.20	43.05	peak
2	5725.000	19.46	34.25	31.57	38.14	60.28	68.20	-7.92	peak
3	5763.018	19.48	34.23	31.59	39.65	61.77	68.20	-6.43	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

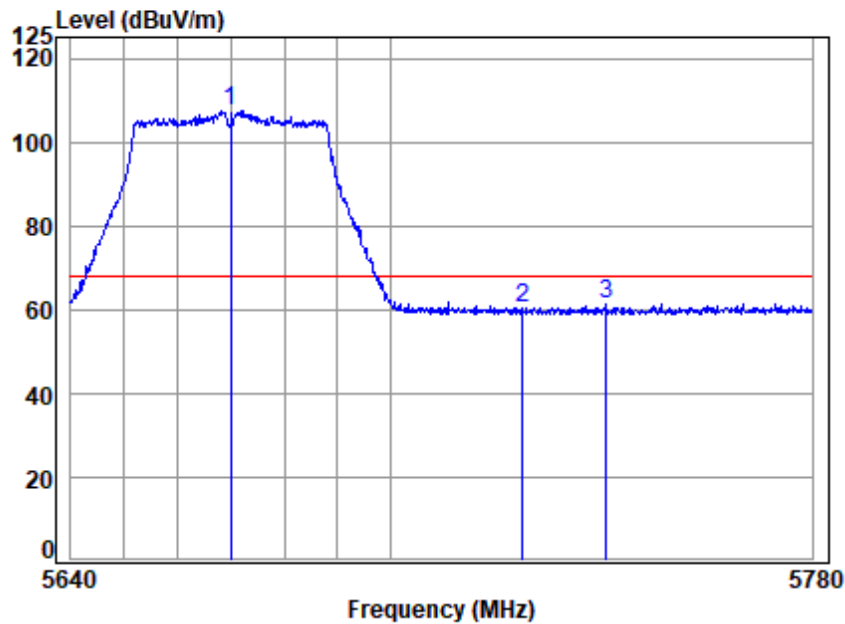

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5670 Band edge
: 5G WIFI 11AC40


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5670.000	19.42	34.36	31.54	85.15	107.39	68.20	39.19 Peak
2	5725.000	19.46	34.25	31.57	38.10	60.24	68.20	-7.96 Peak
3	5740.735	19.47	34.22	31.58	39.12	61.23	68.20	-6.97 Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

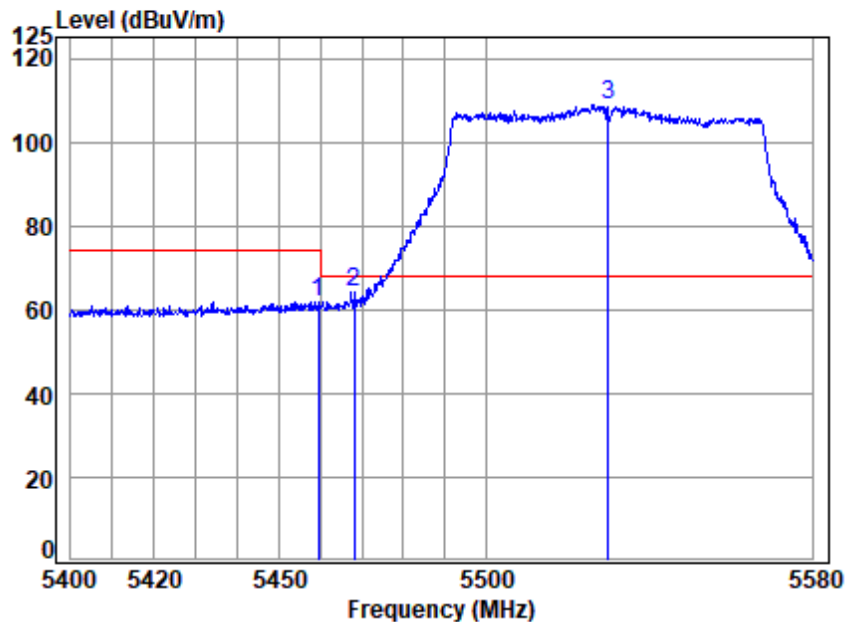


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5530 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5459.465	19.26	34.66	31.44	39.25	61.73	74.00	-12.27	peak
2 5468.244	19.27	34.63	31.45	41.78	64.23	68.20	-3.97	peak
3 p 5530.000	19.33	34.62	31.48	86.55	109.02	68.20	40.82	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

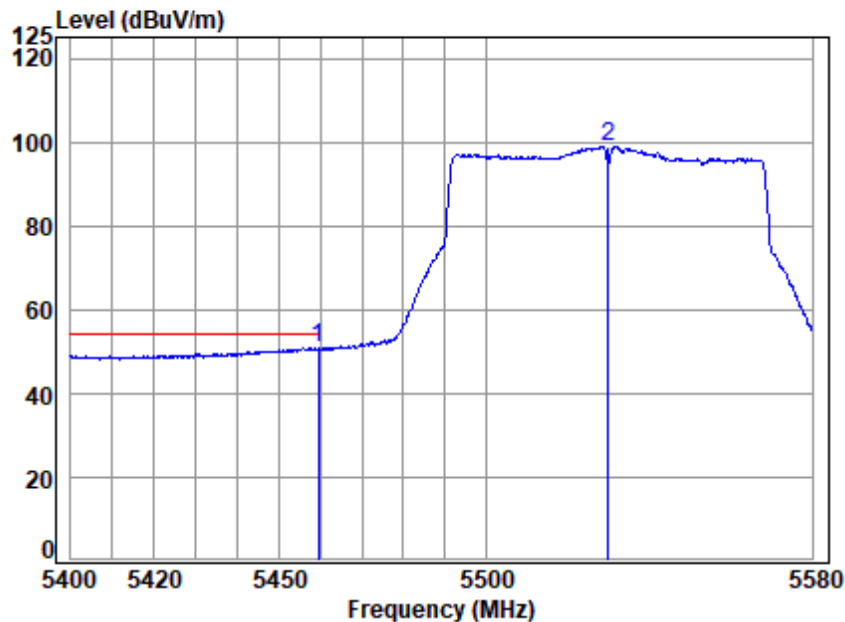


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 03755AT\03756AT
 Mode : 5530 Band edge
 : 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5459.465	19.26	34.66	31.44	28.44	50.92	54.00	-3.08	Average
2 5530.000	19.33	34.62	31.48	76.50	98.97	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

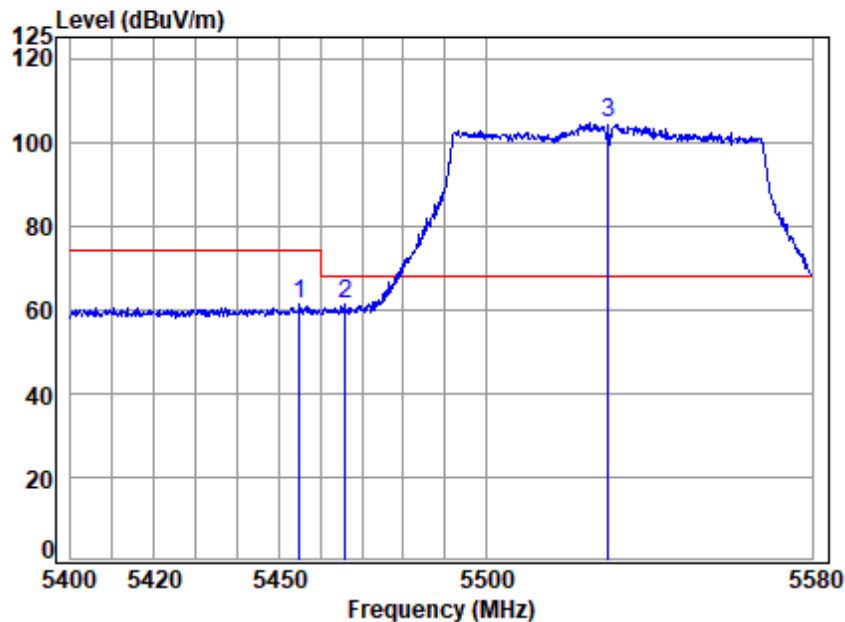


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5530 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5454.991	19.25	34.68	31.44	38.96	61.45	74.00	-12.55	Peak
2 5465.913	19.26	34.64	31.44	38.64	61.10	68.20	-7.10	peak
3 p 5530.000	19.33	34.62	31.48	81.86	104.33	68.20	36.13	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

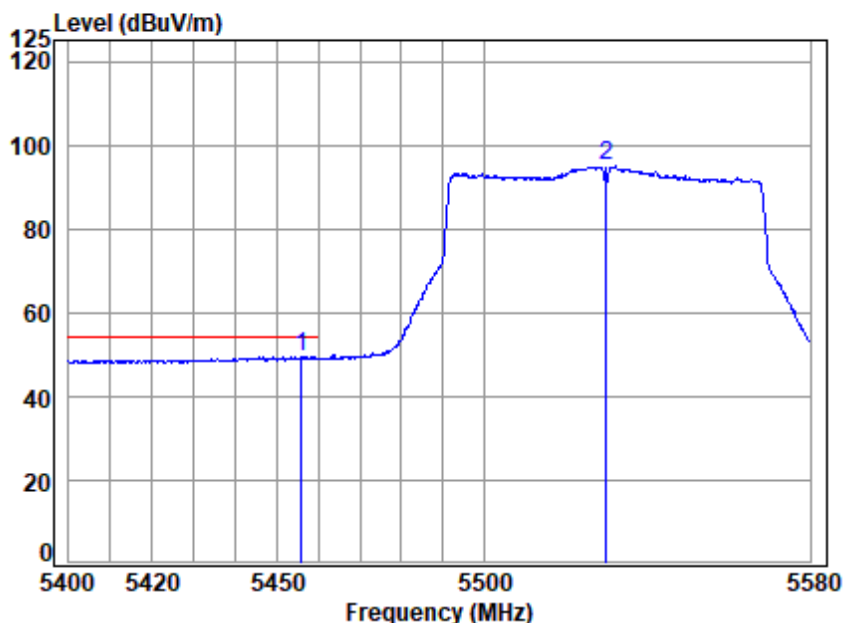


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5530 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5455.886	19.25	34.68	31.44	27.00	49.49	54.00	-4.51	Average
2 5530.000	19.33	34.62	31.48	72.56	95.03	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

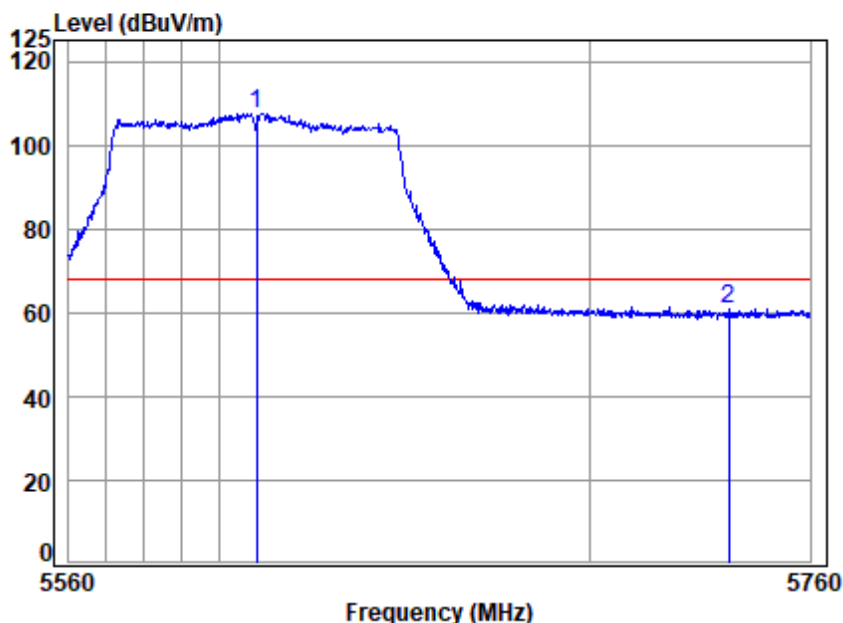


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5610 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5610.000	19.38	34.64	31.52	85.15	107.65	68.20	39.45	peak
2 5737.855	19.47	34.22	31.58	38.88	60.99	68.20	-7.21	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

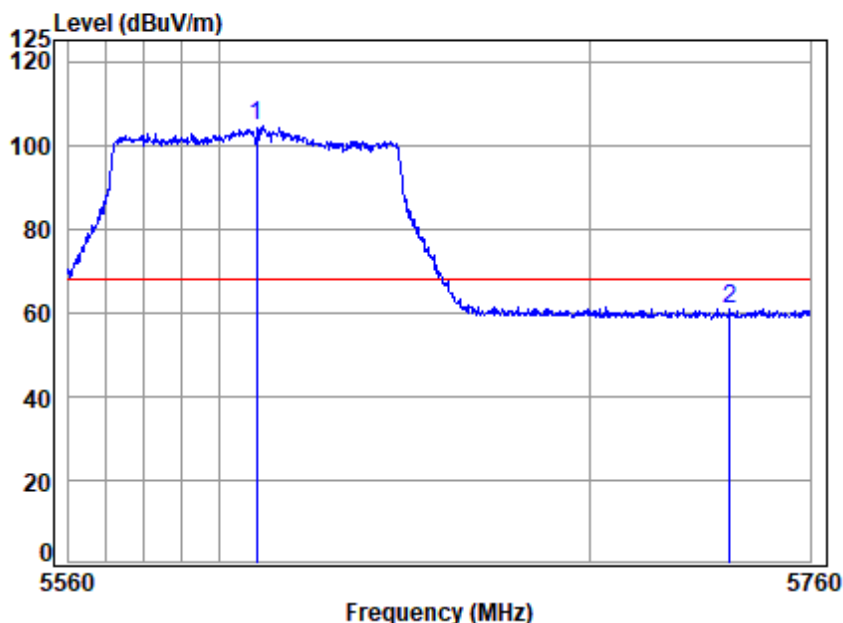


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5610 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5610.000	19.38	34.64	31.52	81.91	104.41	68.20	36.21 Peak
2	5738.058	19.47	34.22	31.58	38.71	60.82	68.20	-7.38 Peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

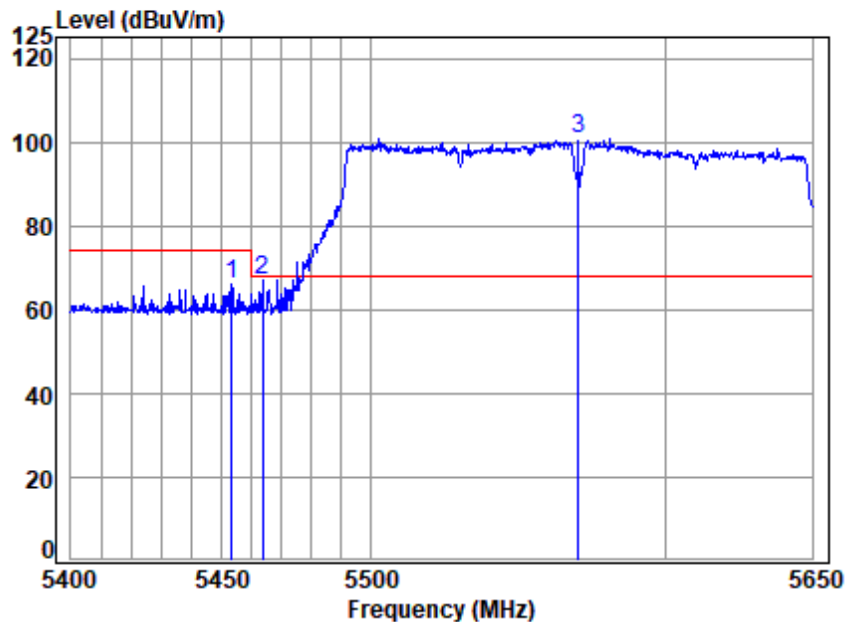


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5453.293	19.25	34.69	31.44	43.65	66.15	74.00	-7.85 peak
2	5463.668	19.26	34.65	31.44	44.68	67.15	68.20	-1.05 peak
3 p	5570.000	19.36	34.70	31.50	78.42	100.98	68.20	32.78 peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

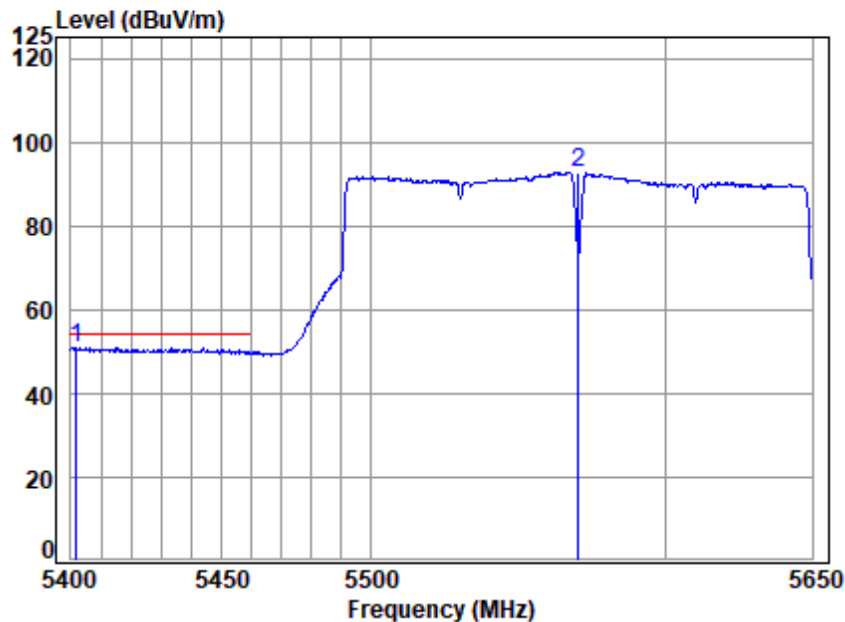


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5401.711	19.18	34.60	31.41	28.57	50.94	54.00	-3.06	Average
2 5570.000	19.36	34.70	31.50	70.26	92.82	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

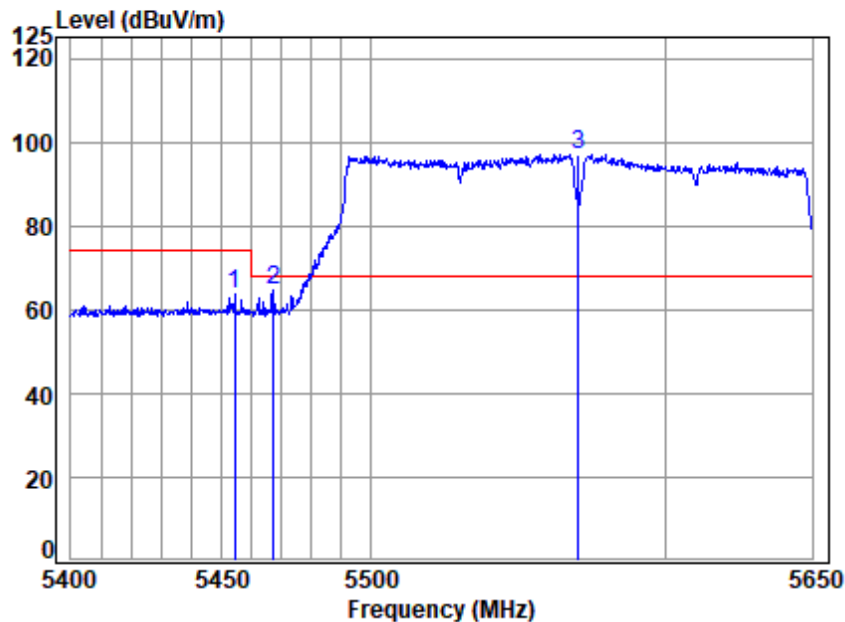


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5454.280	19.25	34.68	31.44	41.24	63.73	74.00	-10.27 Peak
2	5467.131	19.27	34.63	31.44	41.95	64.41	68.20	-3.79 peak
3 p	5570.000	19.36	34.70	31.50	74.32	96.88	68.20	28.68 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

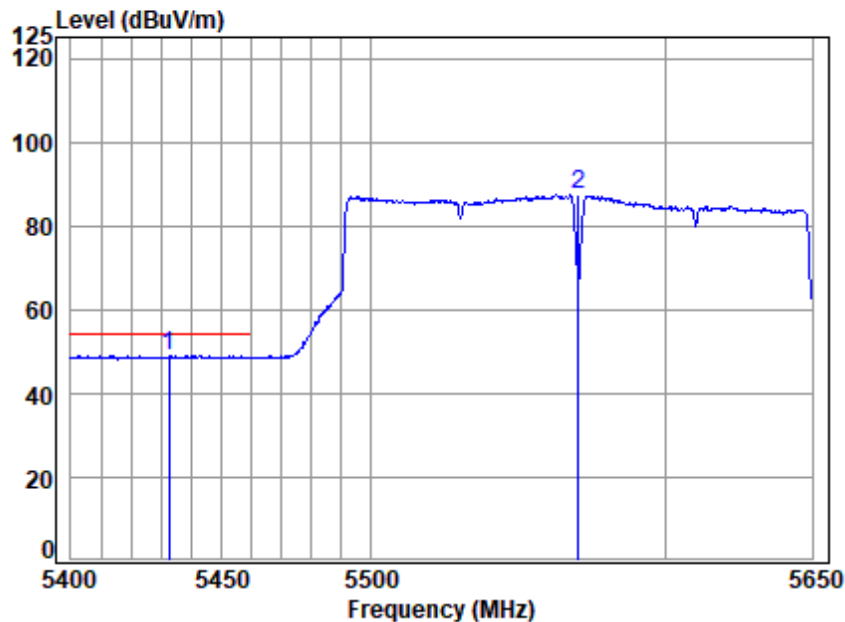


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	5432.355	19.22	34.66	31.43	26.57	49.02	54.00	-4.98 Average
2	5570.000	19.36	34.70	31.50	64.82	87.38	-----	----- Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

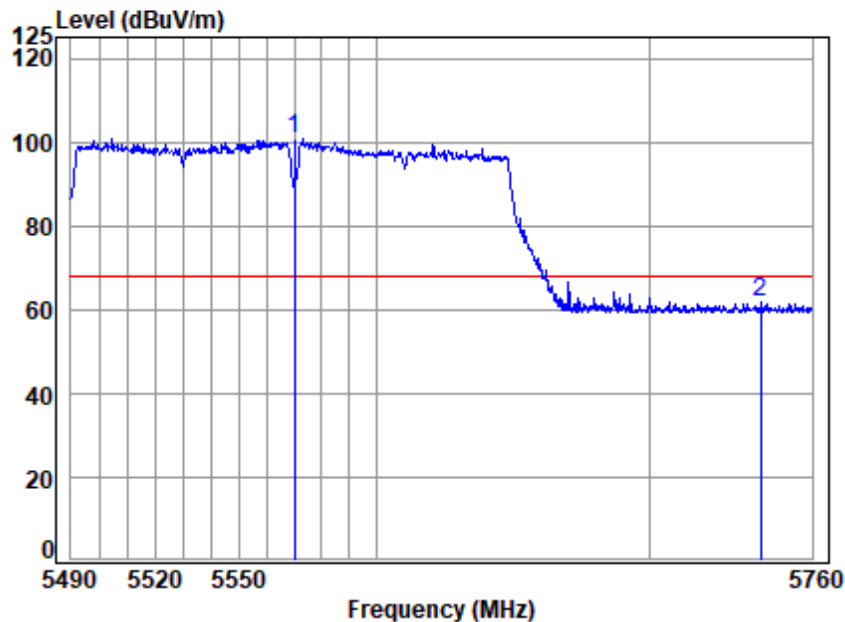


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5570.000	19.36	34.70	31.50	78.16	100.72	68.20	32.52	peak
2 5740.675	19.47	34.22	31.58	39.65	61.76	68.20	-6.44	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

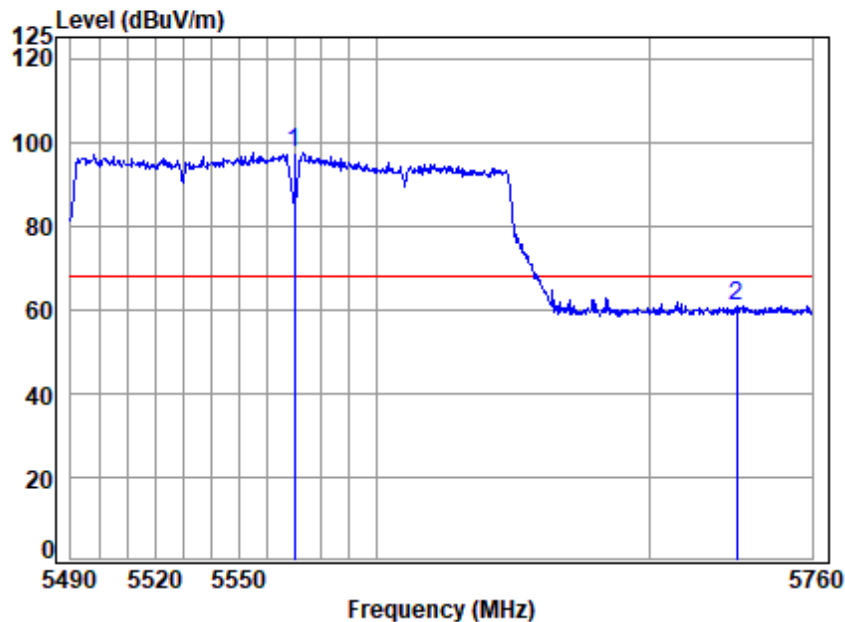


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AC160

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5570.000	19.36	34.70	31.50	75.07	97.63	68.20	29.43 Peak
2	5731.863	19.46	34.24	31.57	38.79	60.92	68.20	-7.28 Peak



Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

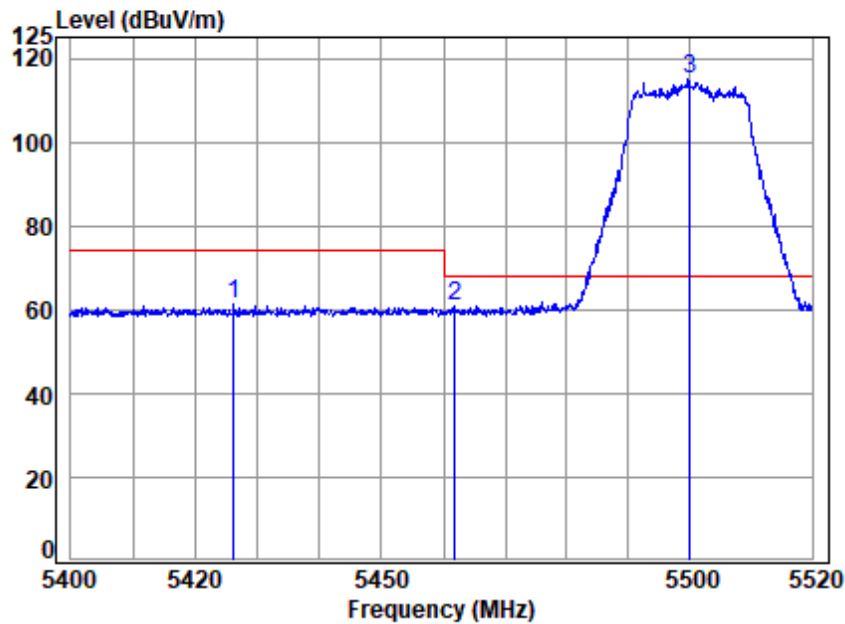

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5426.174	19.21	34.65	31.42	38.85	61.29	74.00	-12.71	peak
2	5461.831	19.26	34.65	31.44	38.47	60.94	68.20	-7.26	peak
3 p	5500.000	19.31	34.50	31.46	92.60	114.95	68.20	46.75	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 285 of 715

Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

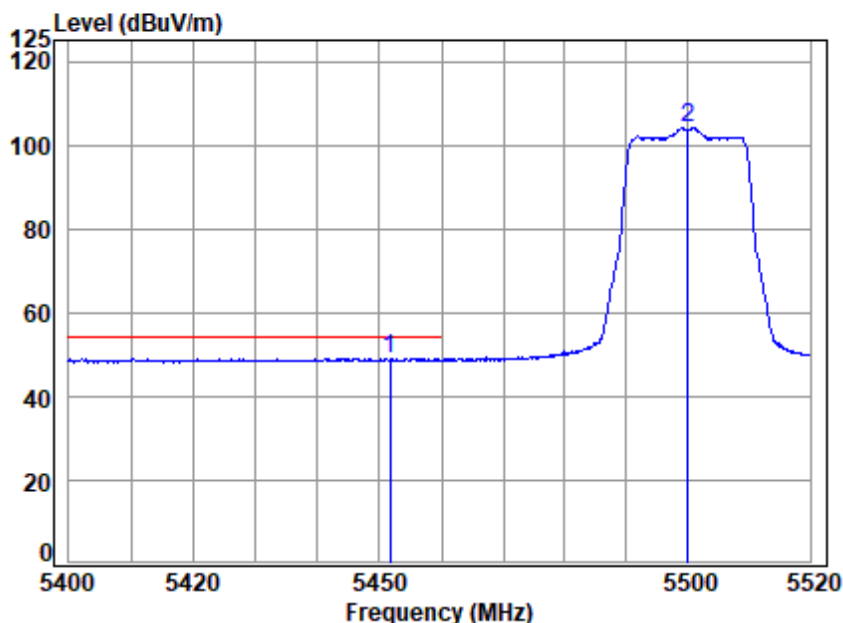

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5451.756	19.25	34.69	31.44	26.56	49.06	54.00	-4.94	Average
2 5500.000	19.31	34.50	31.46	81.83	104.18	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

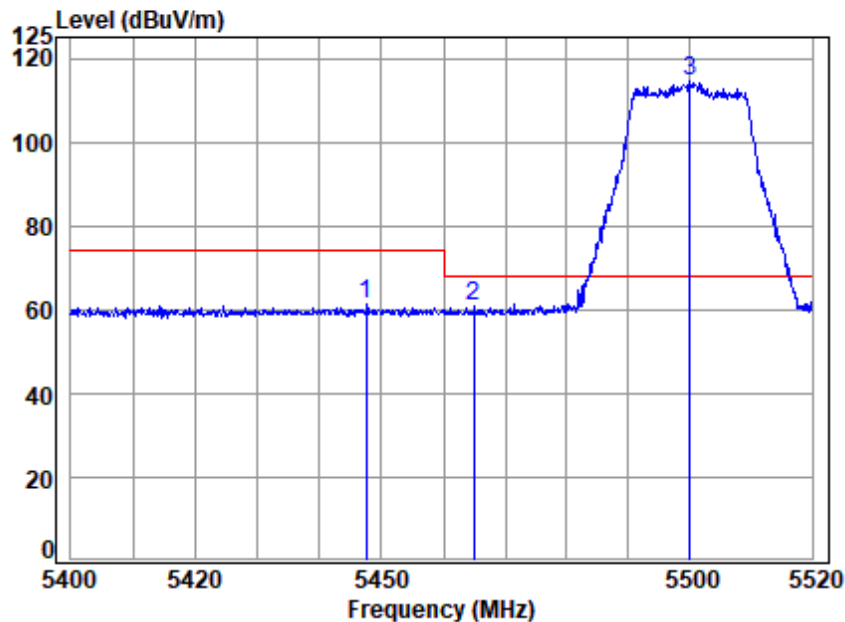


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5447.564	19.24	34.70	31.44	38.66	61.16	74.00	-12.84	Peak
2	5464.953	19.26	34.64	31.44	38.15	60.61	68.20	-7.59	peak
3 p	5500.000	19.31	34.50	31.46	91.98	114.33	68.20	46.13	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

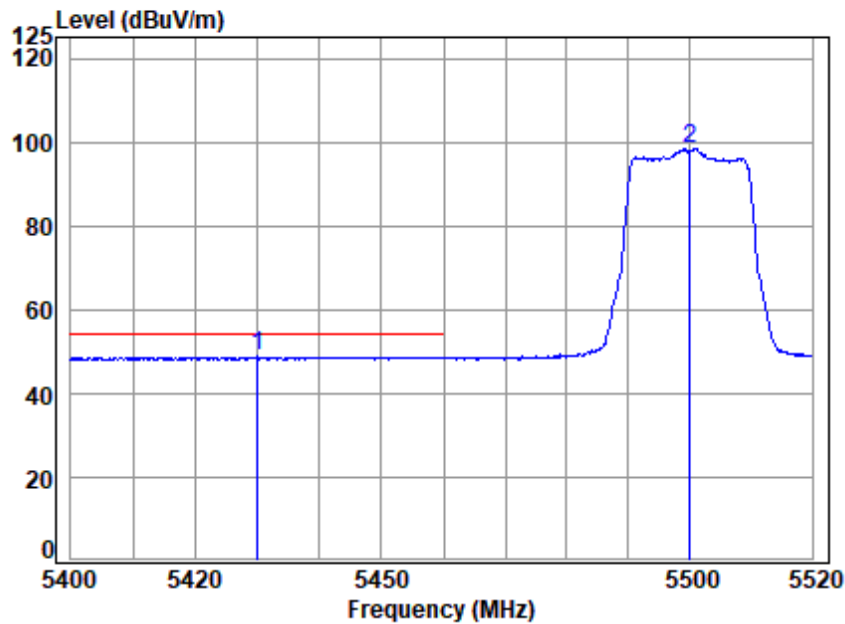


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5500 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5429.992	19.22	34.66	31.43	26.28	48.73	54.00	-5.27	Average
2 5500.000	19.31	34.50	31.46	76.00	98.35	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

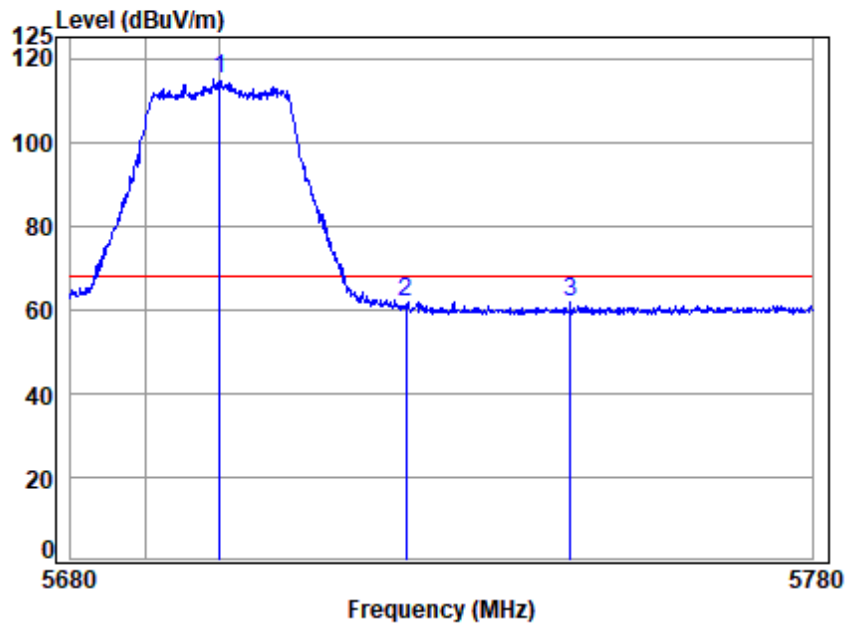


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5700 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5700.000	19.44	34.30	31.56	92.66	114.84	68.20	46.64	peak
2 5725.000	19.46	34.25	31.57	39.42	61.56	68.20	-6.64	peak
3 5747.208	19.47	34.21	31.58	39.75	61.85	68.20	-6.35	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

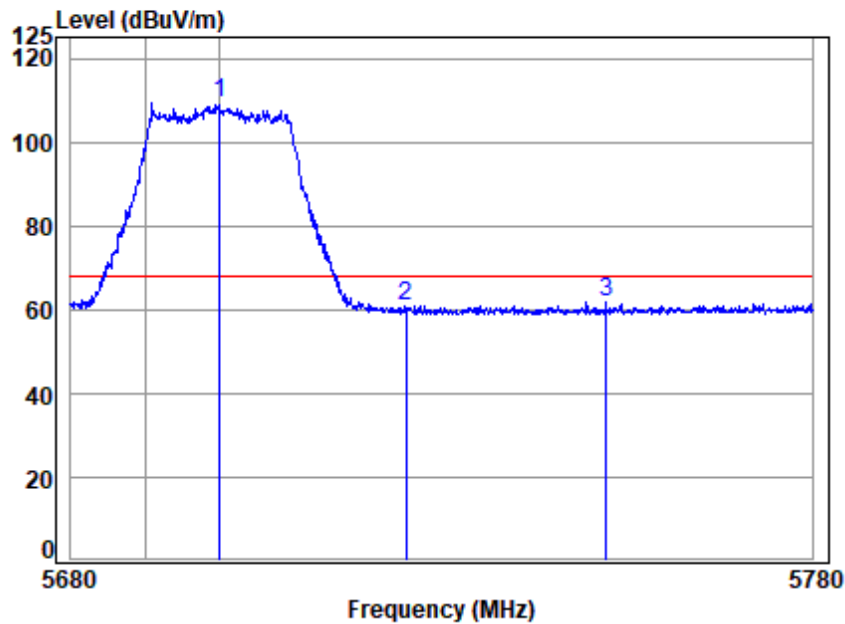


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5700 Band edge
: 5G WIFI 11AX20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5700.000	19.44	34.30	31.56	87.22	109.40	68.20	41.20	Peak
2 5725.000	19.46	34.25	31.57	38.66	60.80	68.20	-7.40	Peak
3 5752.024	19.47	34.20	31.58	39.49	61.58	68.20	-6.62	Peak



Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

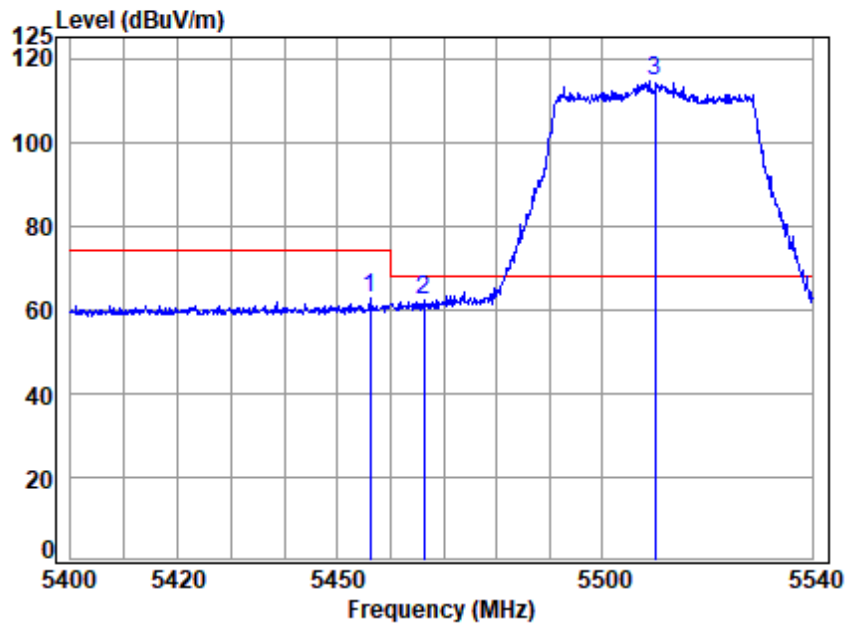


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5456.129	19.25	34.68	31.44	40.33	62.82	74.00	-11.18	peak
2	5466.193	19.27	34.64	31.44	39.65	62.12	68.20	-6.08	peak
3 p	5510.000	19.32	34.54	31.47	92.19	114.58	68.20	46.38	peak



Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

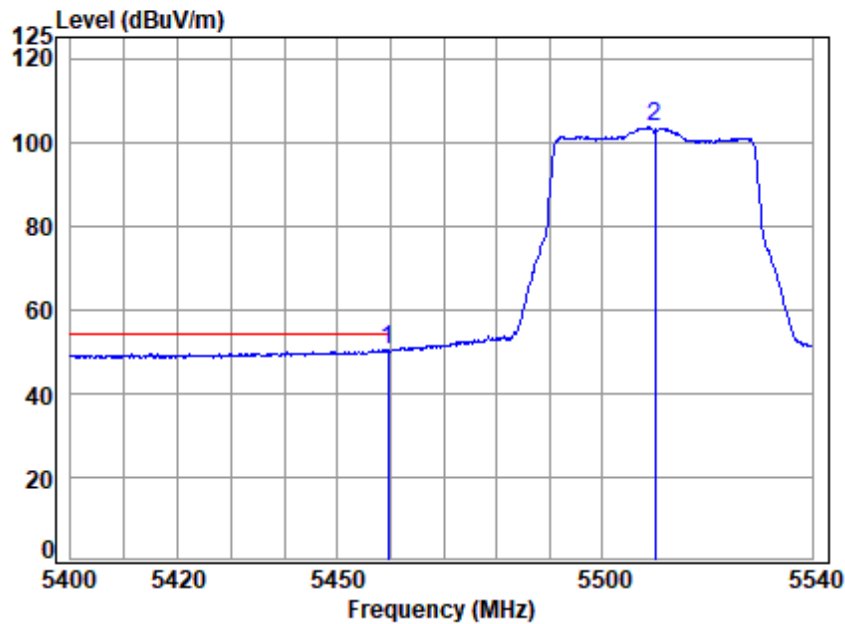


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5459.481	19.26	34.66	31.44	27.93	50.41	54.00	-3.59	Average
2 5510.000	19.32	34.54	31.47	81.14	103.53	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

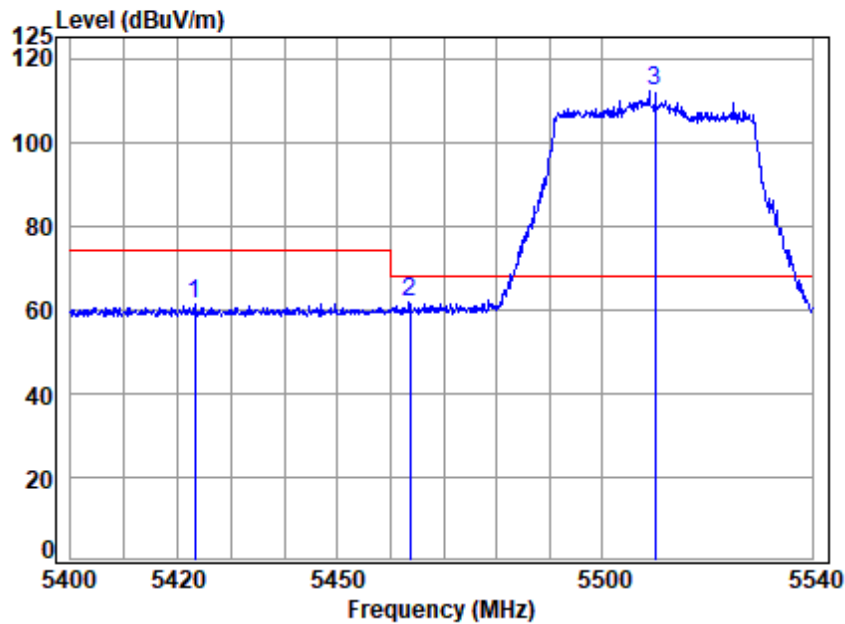


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5423.131	19.21	34.65	31.42	38.92	61.36	74.00	-12.64	Peak
2	5463.536	19.26	34.65	31.44	39.08	61.55	68.20	-6.65	peak
3 p	5510.000	19.32	34.54	31.47	89.55	111.94	68.20	43.74	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

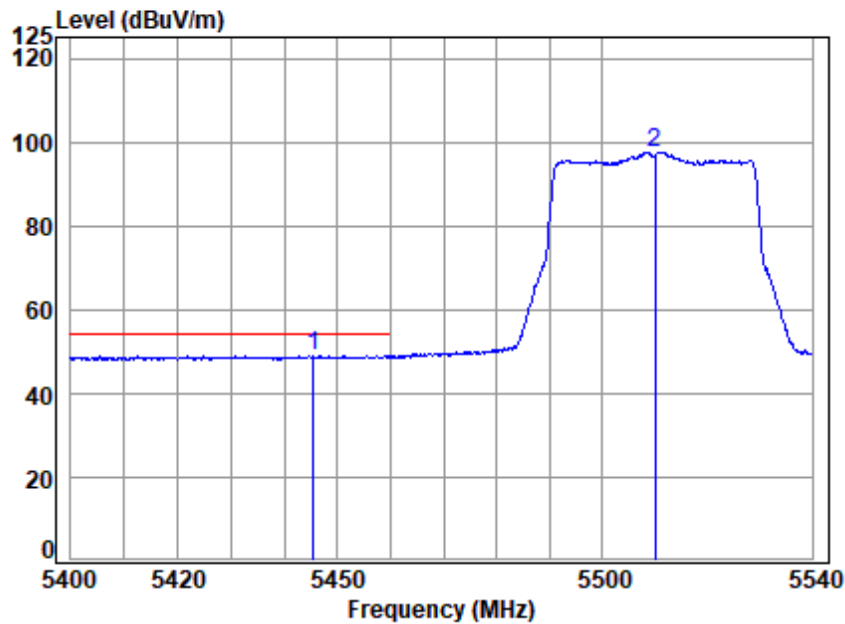


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5510 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5445.526	19.24	34.69	31.43	26.48	48.98	54.00	-5.02	Average
2 5510.000	19.32	34.54	31.47	75.24	97.63	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

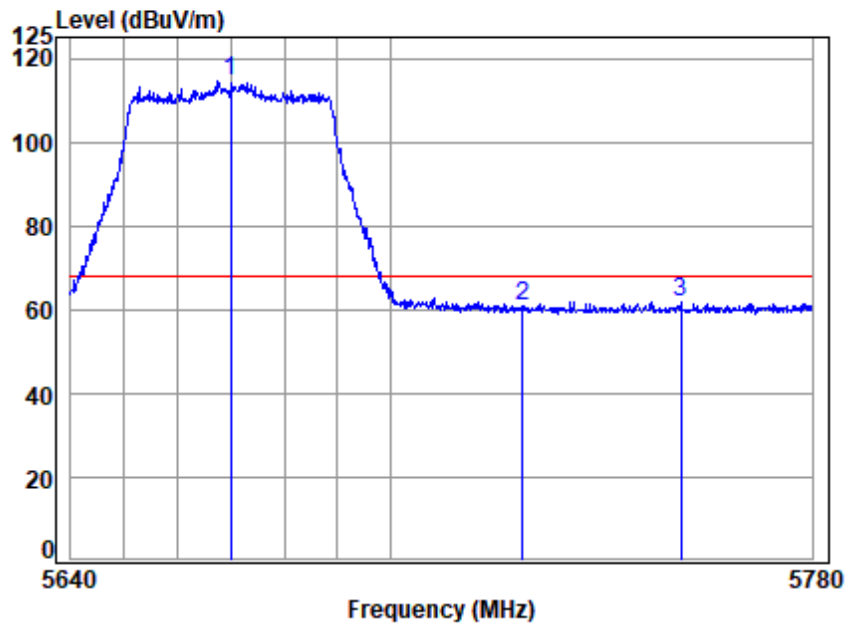


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5670 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5670.000	19.42	34.36	31.54	92.29	114.53	68.20	46.33 peak
2	5725.000	19.46	34.25	31.57	38.79	60.93	68.20	-7.27 peak
3	5754.969	19.48	34.21	31.59	39.78	61.88	68.20	-6.32 peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

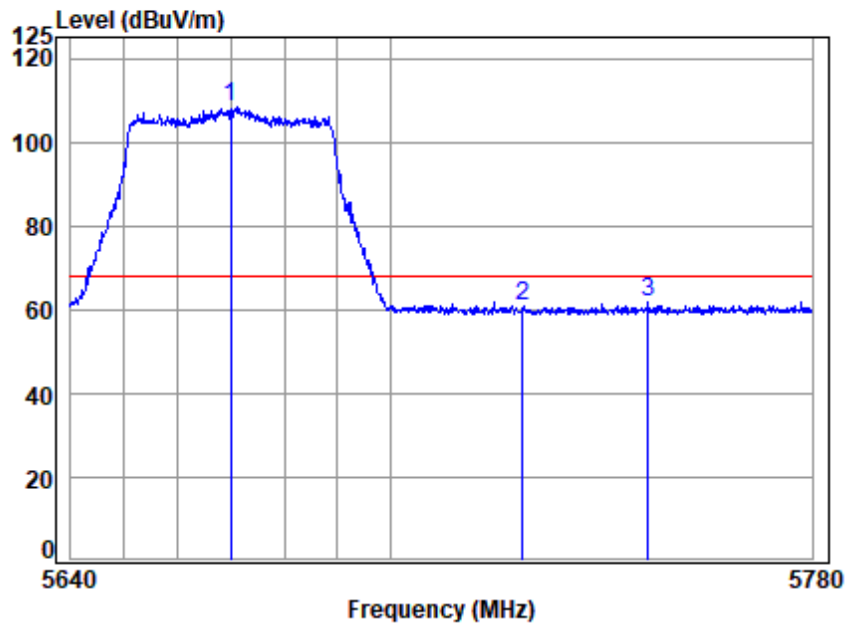


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5670 Band edge
: 5G WIFI 11AX40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5670.000	19.42	34.36	31.54	86.10	108.34	68.20	40.14	Peak
2 5725.000	19.46	34.25	31.57	38.70	60.84	68.20	-7.36	Peak
3 5748.764	19.47	34.20	31.58	39.62	61.71	68.20	-6.49	Peak



Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: Low

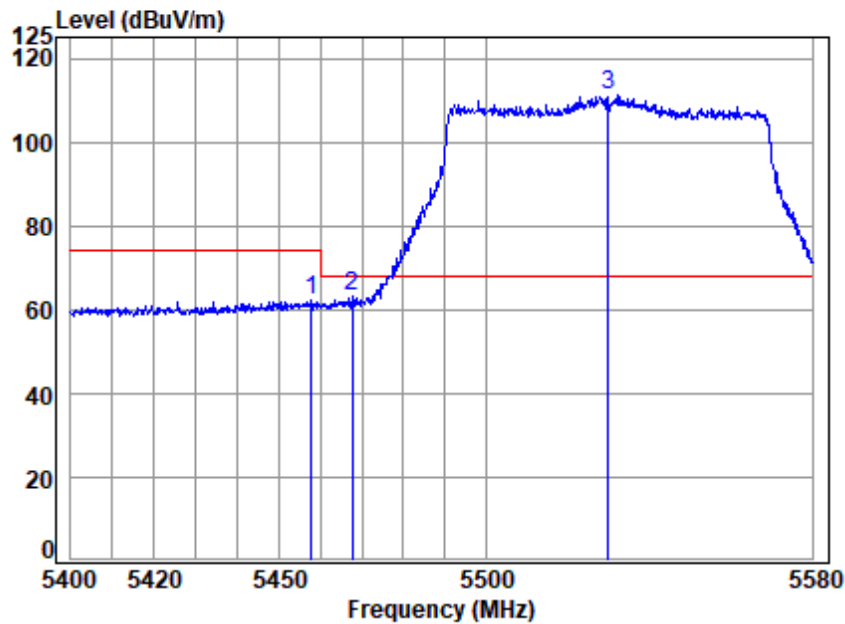


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5530 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5457.854	19.25	34.67	31.44	39.88	62.36	74.00	-11.64	peak
2	5467.706	19.27	34.63	31.45	40.60	63.05	68.20	-5.15	peak
3 p	5530.000	19.33	34.62	31.48	88.74	111.21	68.20	43.01	peak



Test Mode: 05; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 80MHz; Channel: Low

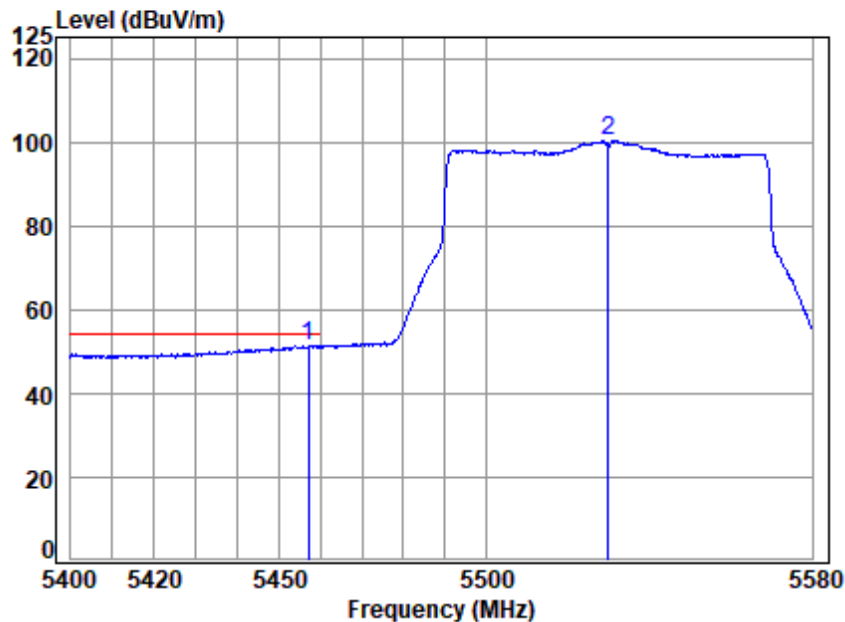


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5530 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5457.138	19.25	34.67	31.44	28.99	51.47	54.00	-2.53	Average
2 5530.000	19.33	34.62	31.48	77.87	100.34	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

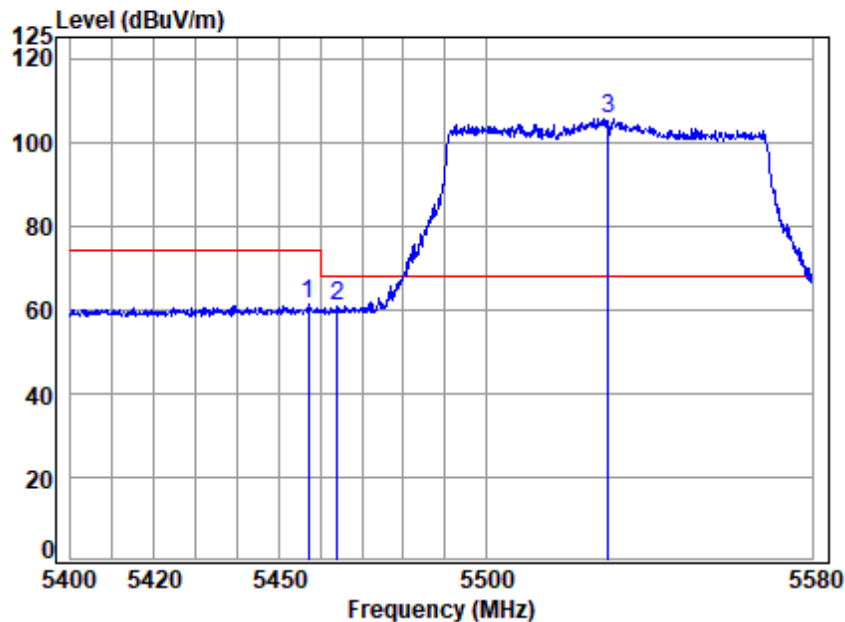


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5530 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5456.959	19.25	34.67	31.44	38.67	61.15	74.00	-12.85	Peak
2	5463.942	19.26	34.64	31.44	38.21	60.67	68.20	-7.53	peak
3 p	5530.000	19.33	34.62	31.48	83.05	105.52	68.20	37.32	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

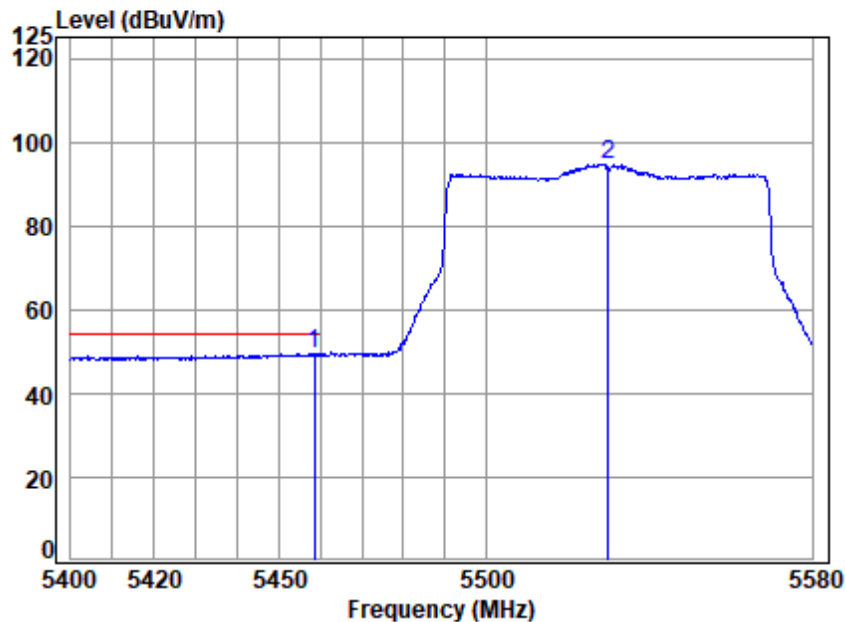

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5530 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5458.570	19.26	34.67	31.44	26.87	49.36	54.00	-4.64	Average
2 5530.000	19.33	34.62	31.48	72.31	94.78	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 300 of 715

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

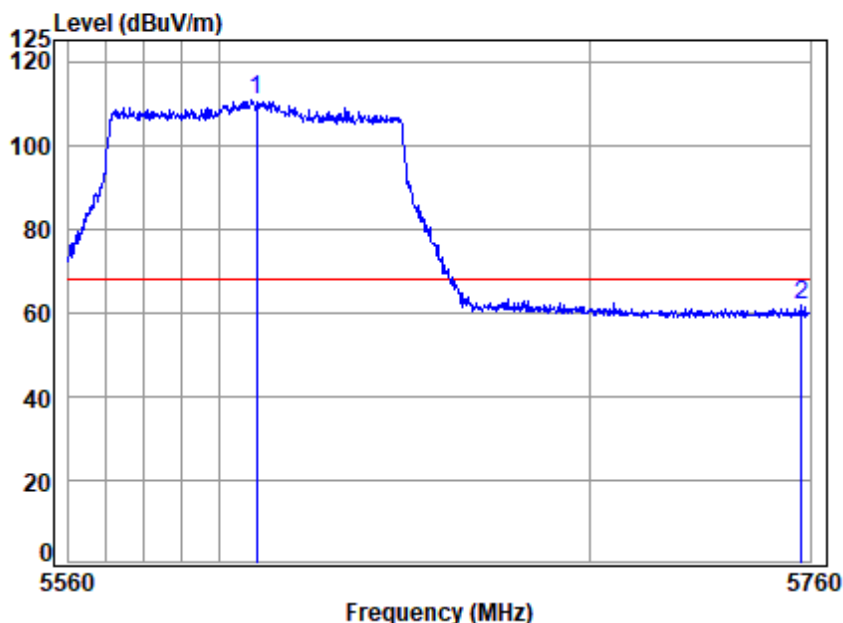

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5610 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5610.000	19.38	34.64	31.52	88.24	110.74	68.20	42.54	peak
2 5757.761	19.48	34.22	31.59	39.66	61.77	68.20	-6.43	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

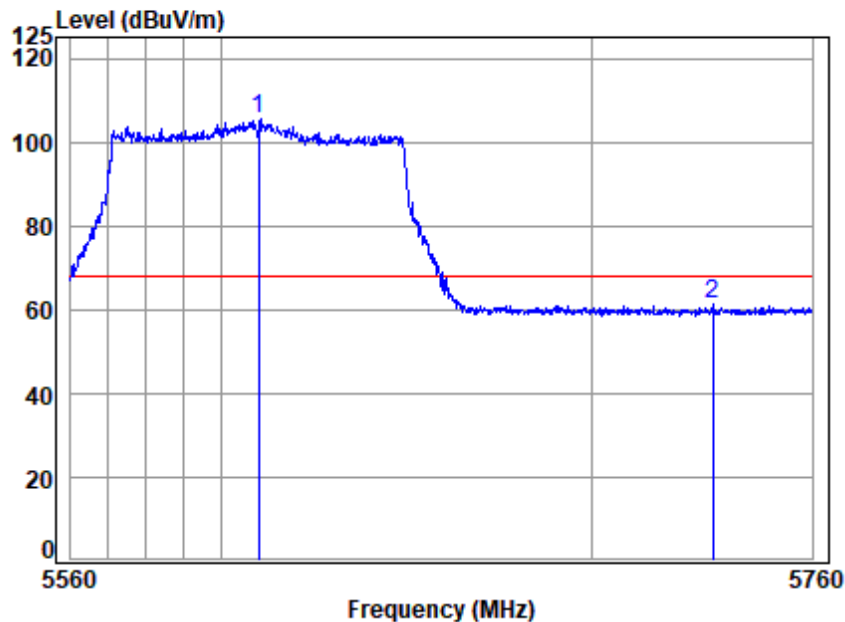

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5610 Band edge
: 5G WIFI 11AX80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5610.000	19.38	34.64	31.52	82.90	105.40	68.20	37.20	Peak
2 5732.788	19.46	34.23	31.58	39.04	61.15	68.20	-7.05	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 302 of 715

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

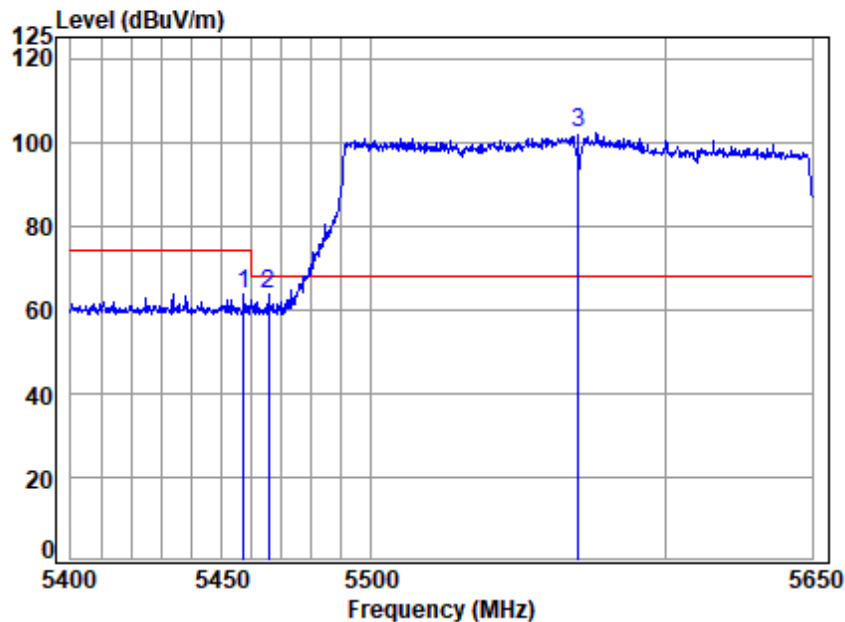

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5457.243	19.25	34.67	31.44	41.32	63.80	74.00	-10.20 peak
2	5465.647	19.26	34.64	31.44	41.01	63.47	68.20	-4.73 peak
3 p	5570.000	19.36	34.70	31.50	79.70	102.26	68.20	34.06 peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 303 of 715

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

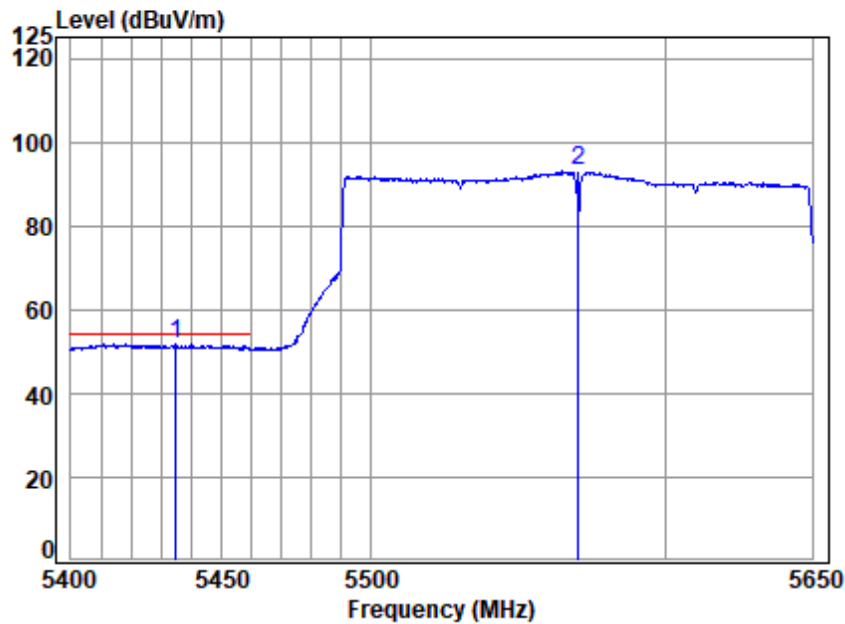

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5434.814	19.22	34.67	31.43	29.44	51.90	54.00	-2.10	Average
2 5570.000	19.36	34.70	31.50	70.37	92.93	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

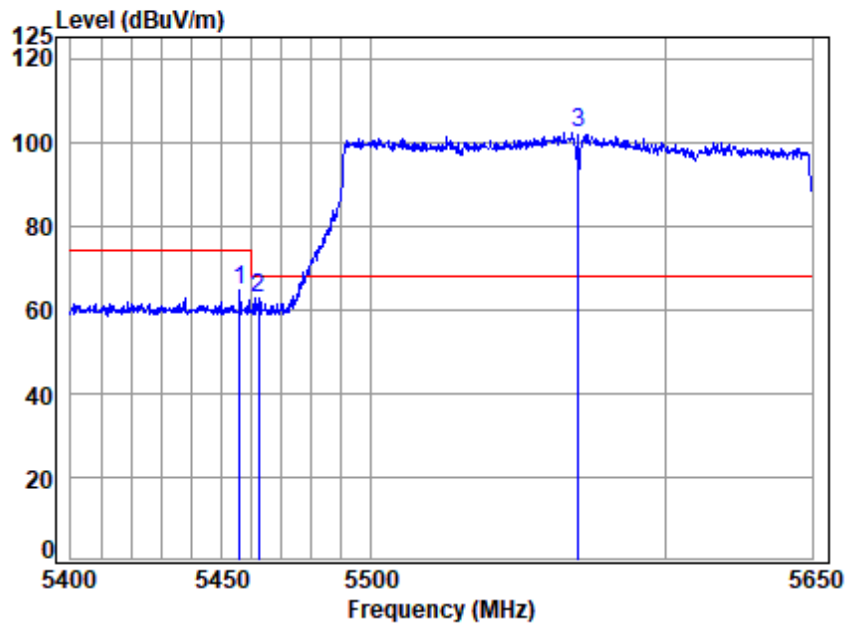

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5456.008	19.25	34.68	31.44	42.09	64.58	74.00	-9.42 Peak
2	5462.432	19.26	34.65	31.44	40.36	62.83	68.20	-5.37 peak
3 p	5570.000	19.36	34.70	31.50	79.78	102.34	68.20	34.14 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000375504

Page: 305 of 715

Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

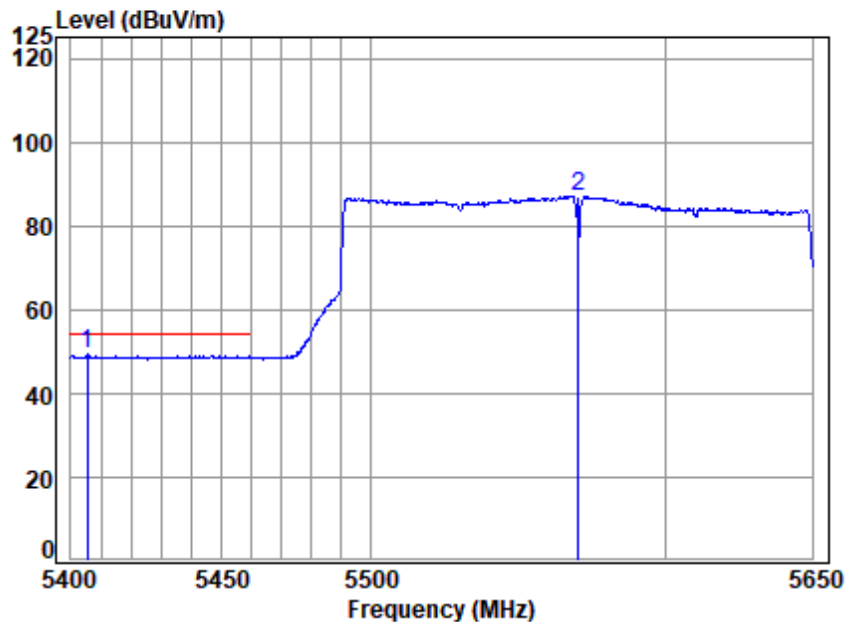

Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5405.379	19.18	34.61	31.41	26.86	49.24	54.00	-4.76	Average
2 5570.000	19.36	34.70	31.50	64.54	87.10	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

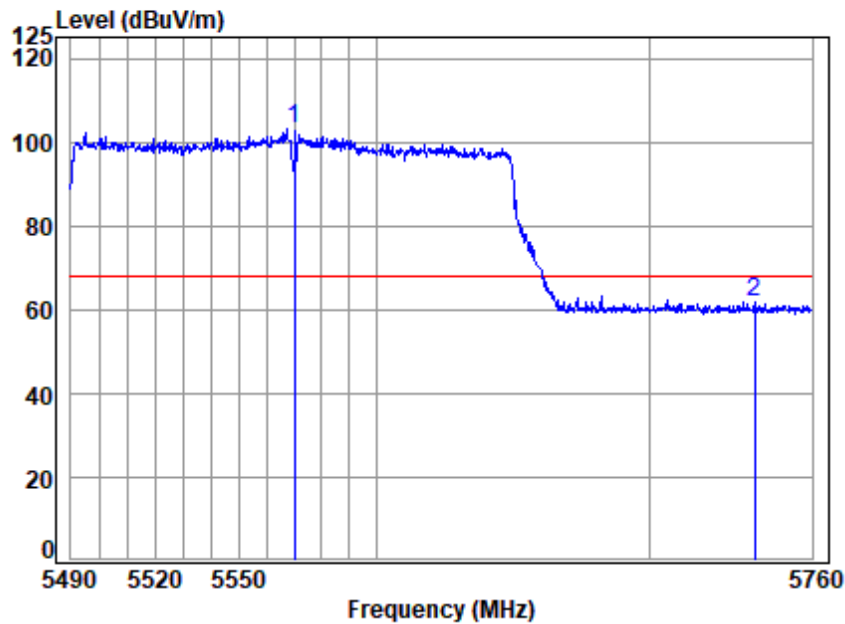


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 p 5570.000	19.36	34.70	31.50	80.51	103.07	68.20	34.87	peak
2 5738.471	19.47	34.22	31.58	39.81	61.92	68.20	-6.28	peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:middle

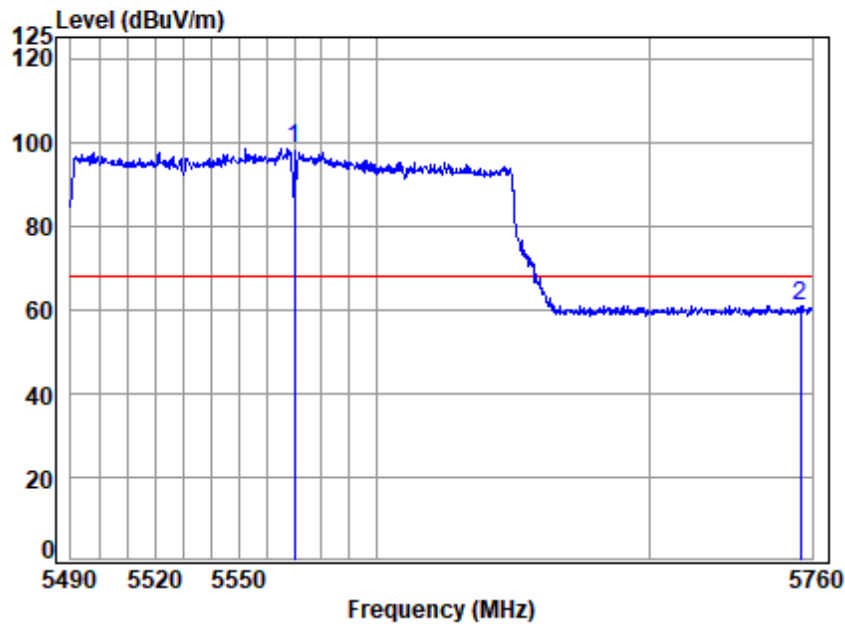


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5570 Band edge
: 5G WIFI 11AX160

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	5570.000	19.36	34.70	31.50	75.98	98.54	68.20	30.34 Peak
2	5755.577	19.48	34.21	31.59	38.78	60.88	68.20	-7.32 Peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

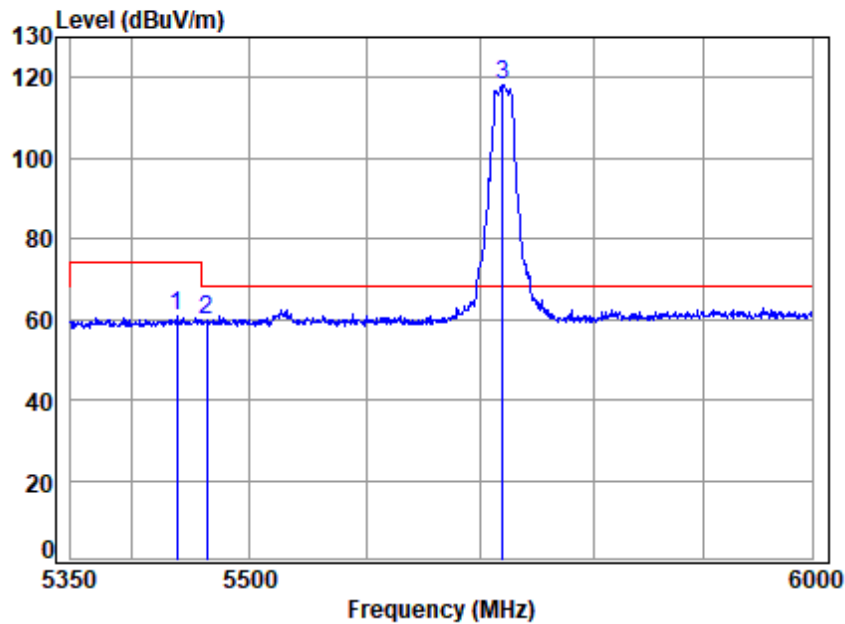


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5720 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5438.446	19.23	34.68	31.43	38.47	60.95	74.00	-13.05	peak
2	5463.447	19.26	34.65	31.44	37.57	60.04	68.20	-8.16	peak
3 p	5720.000	19.45	34.26	31.57	96.20	118.34	68.20	50.14	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

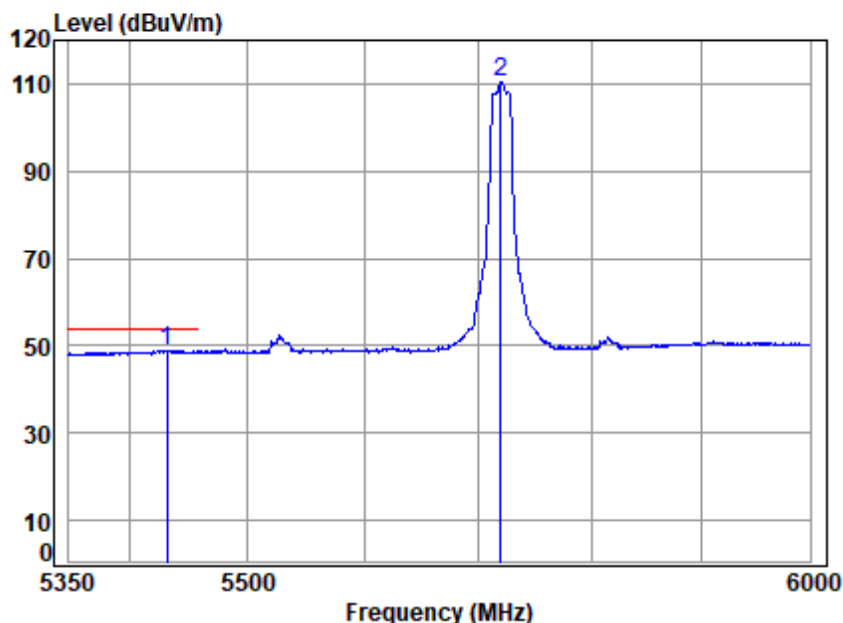


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5720 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5432.214	19.22	34.66	31.43	26.51	48.96	54.00	-5.04	Average
2 5720.000	19.45	34.26	31.57	88.27	110.41	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

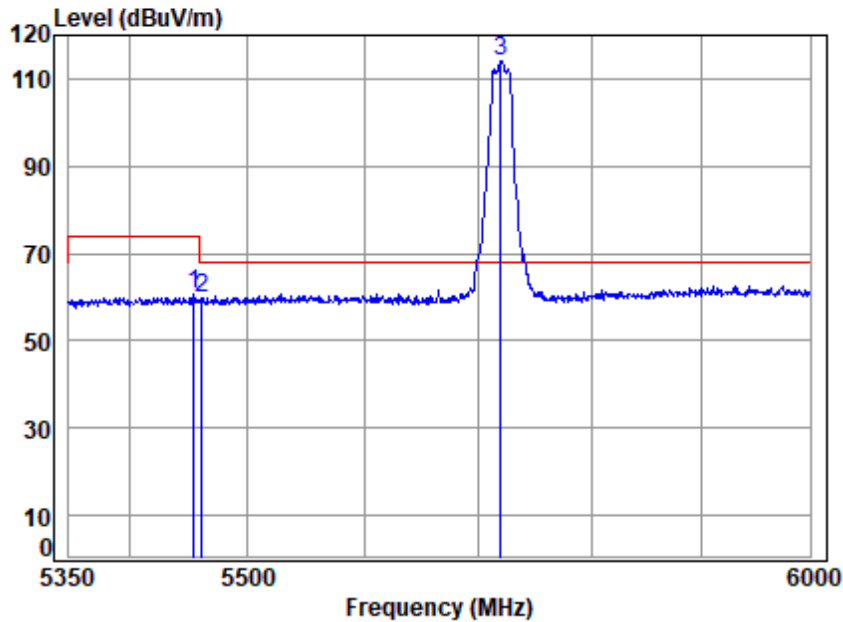


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5720 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5454.684	19.25	34.68	31.44	38.12	60.61	74.00	-13.39	Peak
2	5461.568	19.26	34.65	31.44	37.39	59.86	68.20	-8.34	peak
3 p	5720.000	19.45	34.26	31.57	92.13	114.27	68.20	46.07	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

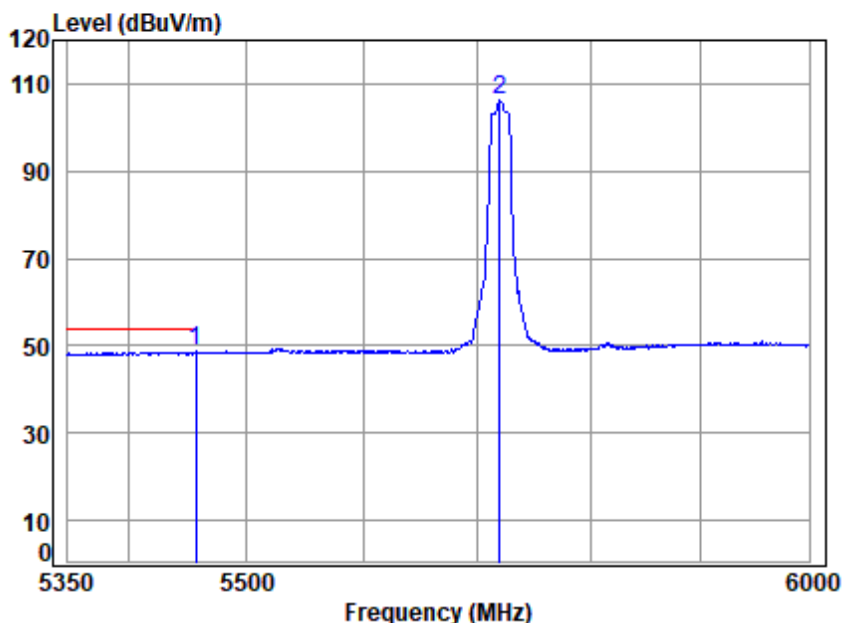


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5720 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5457.186	19.25	34.67	31.44	26.13	48.61	54.00	-5.39	Average
2 5720.000	19.45	34.26	31.57	84.20	106.34	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

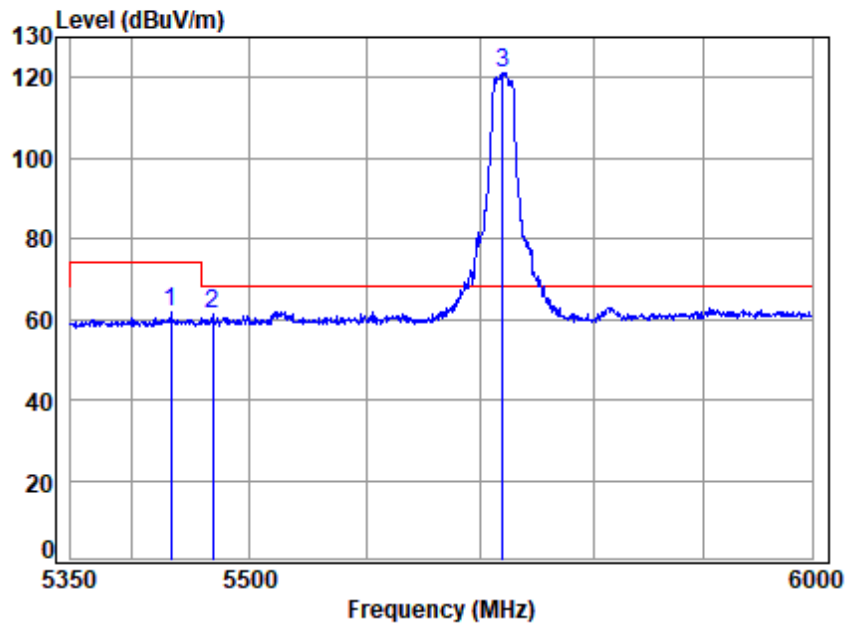


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5720 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5433.459	19.22	34.67	31.43	39.17	61.63	74.00	-12.37	peak
2	5468.461	19.27	34.63	31.45	38.78	61.23	68.20	-6.97	peak
3 p	5720.000	19.45	34.26	31.57	98.81	120.95	68.20	52.75	peak



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

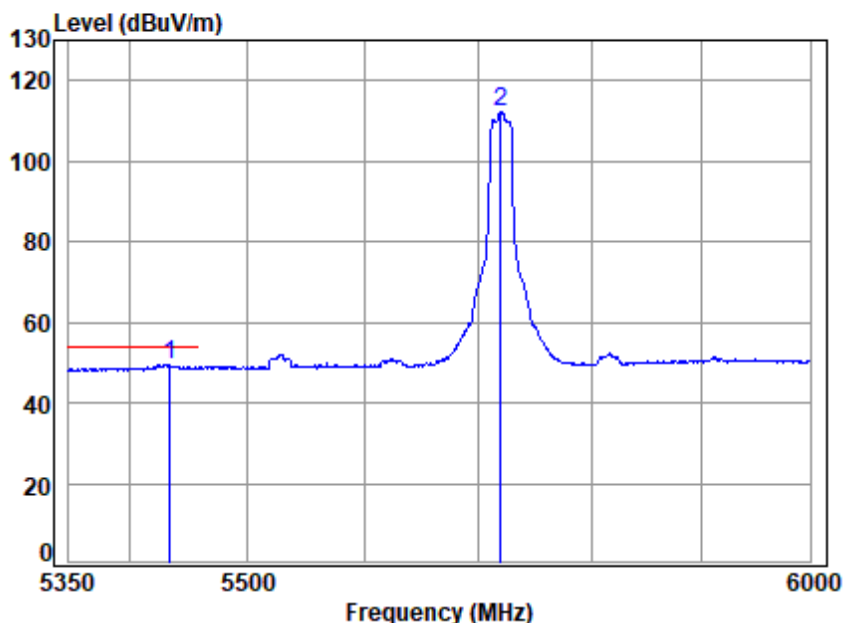


Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5720 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5434.083	19.22	34.67	31.43	27.14	49.60	54.00	-4.40	Average
2 5720.000	19.45	34.26	31.57	90.23	112.37	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

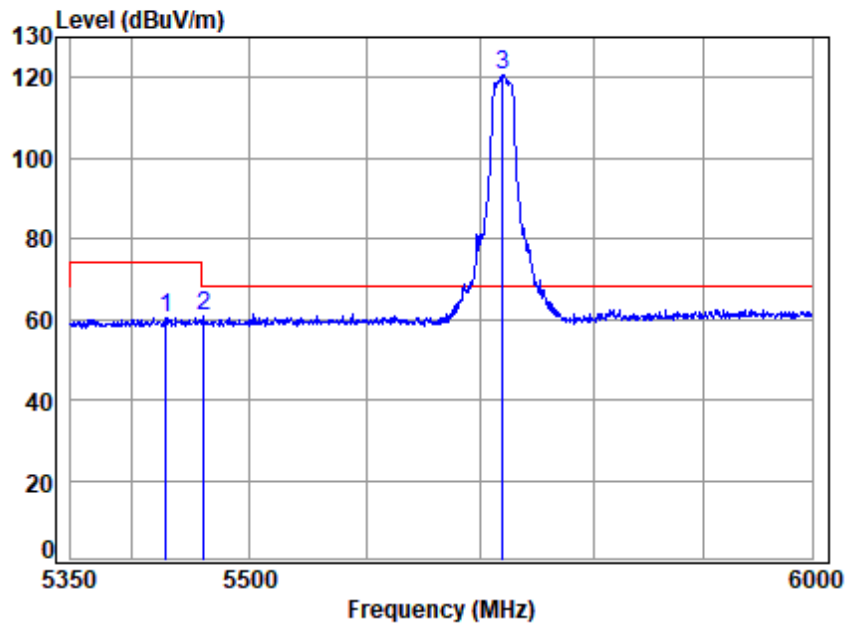


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5720 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5429.723	19.22	34.66	31.43	38.00	60.45	74.00	-13.55	Peak
2	5461.568	19.26	34.65	31.44	38.43	60.90	68.20	-7.30	peak
3 p	5720.000	19.45	34.26	31.57	98.53	120.67	68.20	52.47	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

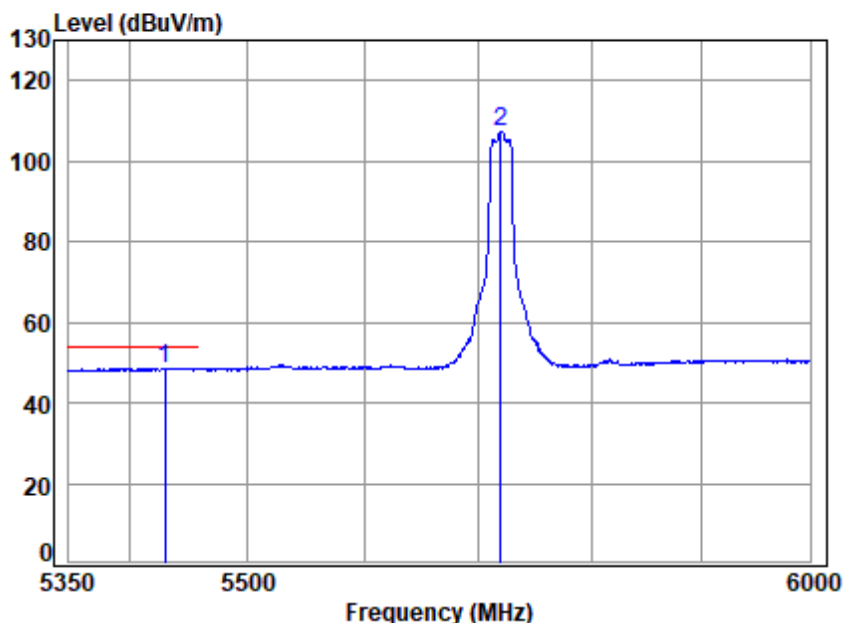


Site : chamber
Condition: 3m VERTICAL
Job No : 03755AT\03756AT
Mode : 5720 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 q 5430.345	19.22	34.66	31.43	26.23	48.68	54.00	-5.32	Average
2 5720.000	19.45	34.26	31.57	85.31	107.45	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

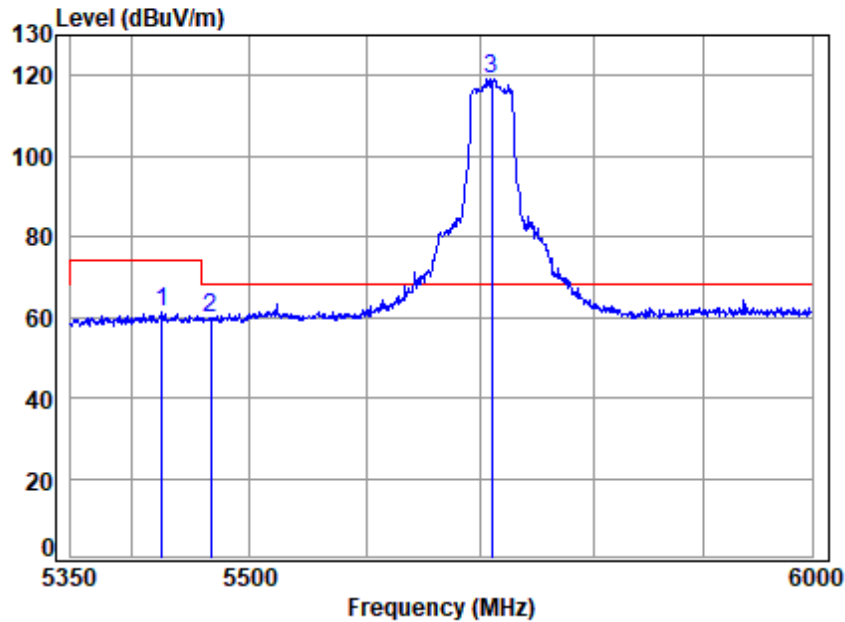

Site : chamber
Condition: 3m HORIZONTAL
Job No : 03755AT\03756AT
Mode : 5710 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5425.988	19.21	34.65	31.42	38.78	61.22	74.00	-12.78 peak
2	5467.207	19.27	34.63	31.44	37.54	60.00	68.20	-8.20 peak
3 p	5710.000	19.45	34.28	31.56	97.00	119.17	68.20	50.97 peak

