



Certificate #4312.01

FCC & ISED TEST REPORT

Product Name: 8-Port Unmanaged Gigabit Switch with 8 PoE+
Trade Mark: GRANDSTREAM
Model No. / HVIN: GWN7701PA
Add. Model No. / HVIN: N/A
Report Number: 2303174476EMC-1
Test Standards: FCC 47 CFR Part 15 Subpart B
 ICES-003 Issue 7
FCC ID: YZZGWN7701PA
Test Result: PASS
Date of Issue: May 9, 2023

Prepared for:

Grandstream Networks, Inc.
126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
 technology park, Longhua district, Shenzhen, China**

TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:

Calvin Chen
 Senior Project Engineer

Reviewed by:

Henry Lu
 Team Leader

Approved by:

Kevin Liang
 Assistant Manager

Date:

May 9, 2023

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Version

Version No.	Date	Description
V1.0	May 9, 2023	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>UTTR-EMC-ICES003-V1.2

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 DESCRIPTION OF SUPPORT UNITS	4
1.4 TEST LOCATION	5
1.5 TEST FACILITY	5
1.6 DEVIATION FROM STANDARDS	5
1.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
1.9 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	9
4.2 TEST MODES	9
4.3 TEST SETUP	9
4.3.1 FOR RADIATED EMISSIONS TEST SETUP	9
4.3.2 FOR CONDUCTED EMISSIONS TEST SETUP	10
4.4 SYSTEM TEST CONFIGURATION	10
5. REFERENCE DOCUMENTS FOR TESTING	11
6. EMC REQUIREMENTS SPECIFICATION	11
6.1 RADIATED EMISSION	11
6.2 CONDUCTED EMISSION	17
APPENDIX 1 PHOTOS OF TEST SETUP	22
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	22

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Grandstream Networks, Inc.
Address of Applicant:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Manufacturer:	Grandstream Networks, Inc.
Address of Manufacturer:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	8-Port Unmanaged Gigabit Switch with 8 PoE+
Model No. / HVIN:	GWN7701PA
Add. Model No. / HVIN:	N/A
Trade Mark:	GRANDSTREAM
DUT Stage:	Production Unit
Rated Voltage:	100-240V~ 50/60Hz 2.5A
Classification of digital devices:	Class A
Highest Internal Frequency:	25 MHz
Software Version:	N/A (Provided by the customer)
Hardware Version:	V1.0 (Provided by the customer)
Sample Received Date:	March 17, 2023
Sample Tested Date:	April 7, 2023 to April 11, 2023
Note: This product can configure with two different power modules: Build-in Power 1: BOF-150S52-N; Build-in Power 2: R0066A.	
Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.	

1.2.2 Description of Accessories

Cable	
Description:	AC Power Cable
Cable Type:	Unshielded without ferrite
Length:	1.2 Meter

1.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	LENOVO	E450	PF-0EQBE3 15/11	UnionTrust
Notebook	LENOVO	E450	PF-09ELQF 15/06	UnionTrust
Mouse	Lenovo	N/A	SZDH-OP303-305-P-800D PI-200701	UnionTrust
Mouse	DELL	MS111-T	CN-0KW2YH-71616-5AH-0 SV7	UnionTrust
AE (POE Load)	N/A	N/A	N/A	Applicant

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1~8	Ethernet Cable	RJ45	0.2 meter Unshielded without ferrite	UnionTrust
9~10	Ethernet Cable	RJ45	3.0 Unshielded without ferrite	UnionTrust

1.4 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
 Telephone: +86 (0) 755 2823 0888
 Fax: +86 (0) 755 2823 0886

1.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194
 Test Firm Registration Number: 259480

1.6 DEVIATION FROM STANDARDS

None.

1.7 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

1.9 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart B Test Cases			
Test Item	Test Requirement	Test Method	Result
Conducted Emission	FCC 47 CFR Part 15.107 ICES-003 Issue 7 Section 3.2.1	ANSI C63.4-2014	PASS
Radiated Emission	FCC 47 CFR Part 15.109 ICES-003 Issue 7 Section 3.2.2	ANSI C63.4-2014	PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>UTTR-EMC-ICES003-V1.2

3. EQUIPMENT LIST

Radiated Emission Test - 3M Chamber						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m Chamber & Accessory Equipment	ETS-Lindgren	3m	Euroshiedpn-CT 001270-1317	22-Jan-2021	21-Jan-2024
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-Lindgren	3142E	00201566	13-Dec-2022	12-Dec-2023
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	13-Dec-2022	12-Dec-2023
<input checked="" type="checkbox"/>	Pre-amplifier	HP	8447F	2805A02960	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Receiver	ROHDE & SCHWARZ	ESIB26	100114	3-Nov-2022	2-Nov-2023
<input checked="" type="checkbox"/>	Multi device Controller	ETS-Lindgren	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	101181	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Shielding room	ETS-Lindgren	843	Euroshiedpn-CT001270-1246	5-Nov-2021	4-Nov-2024
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9 20151119i		

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	1: AC 120V/60Hz 2: AC 240V/50Hz	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample


Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)	Sample No.	Tested by
Conducted Emission	23.7	56.8	100.2	S202303171 215-ZJA02/2	Andy Lin
Radiated Emission	22.1	58.9	100.0	S202303171 215-ZJA02/2	Andy Lin


4.2 TEST MODES

Test Item	EMI Test Modes
Radiated Emission	Test Mode 1: AC120V/60Hz (Build-in Power 1) + LAN Port Loop transmission + POE out Test Mode 2: AC240V/50Hz (Build-in Power 1) + LAN Port Loop transmission + POE out Test Mode 3: AC120V/60Hz (Build-in Power 2) + LAN Port Loop transmission + POE out Test Mode 4: AC240V/50Hz (Build-in Power 2) + LAN Port Loop transmission + POE out
Conducted Emission	Test Mode 1: AC120V/60Hz (Build-in Power 1) + LAN Port Loop transmission + POE out Test Mode 2: AC240V/50Hz (Build-in Power 1) + LAN Port Loop transmission + POE out Test Mode 3: AC120V/60Hz (Build-in Power 2) + LAN Port Loop transmission + POE out Test Mode 4: AC240V/50Hz (Build-in Power 2) + LAN Port Loop transmission + POE out


4.3 TEST SETUP

4.3.1 For Radiated Emissions test setup

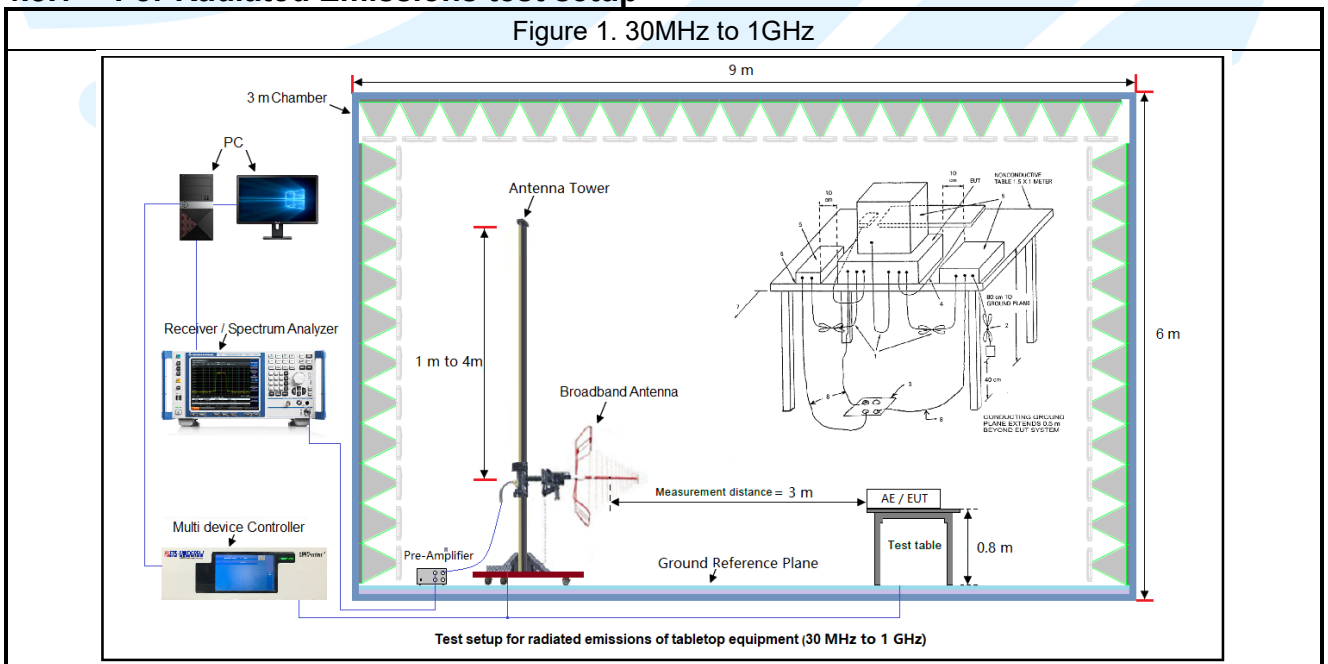

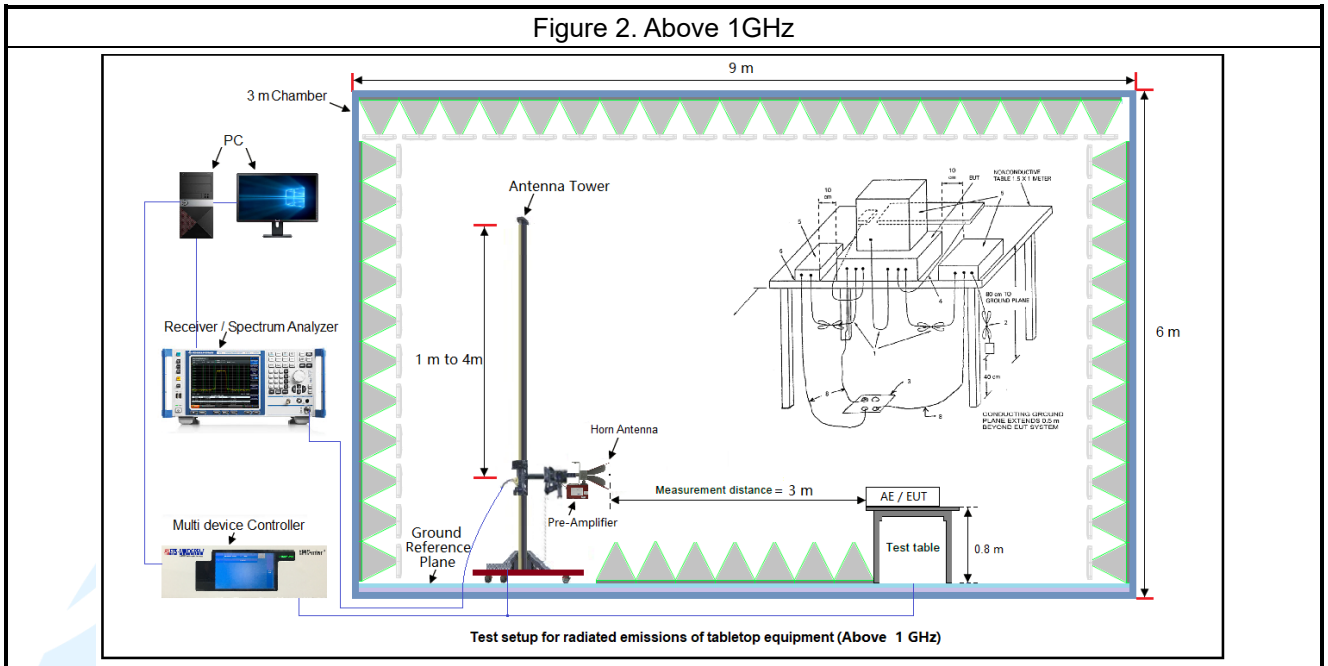

4.3.2 For Conducted Emissions test setup

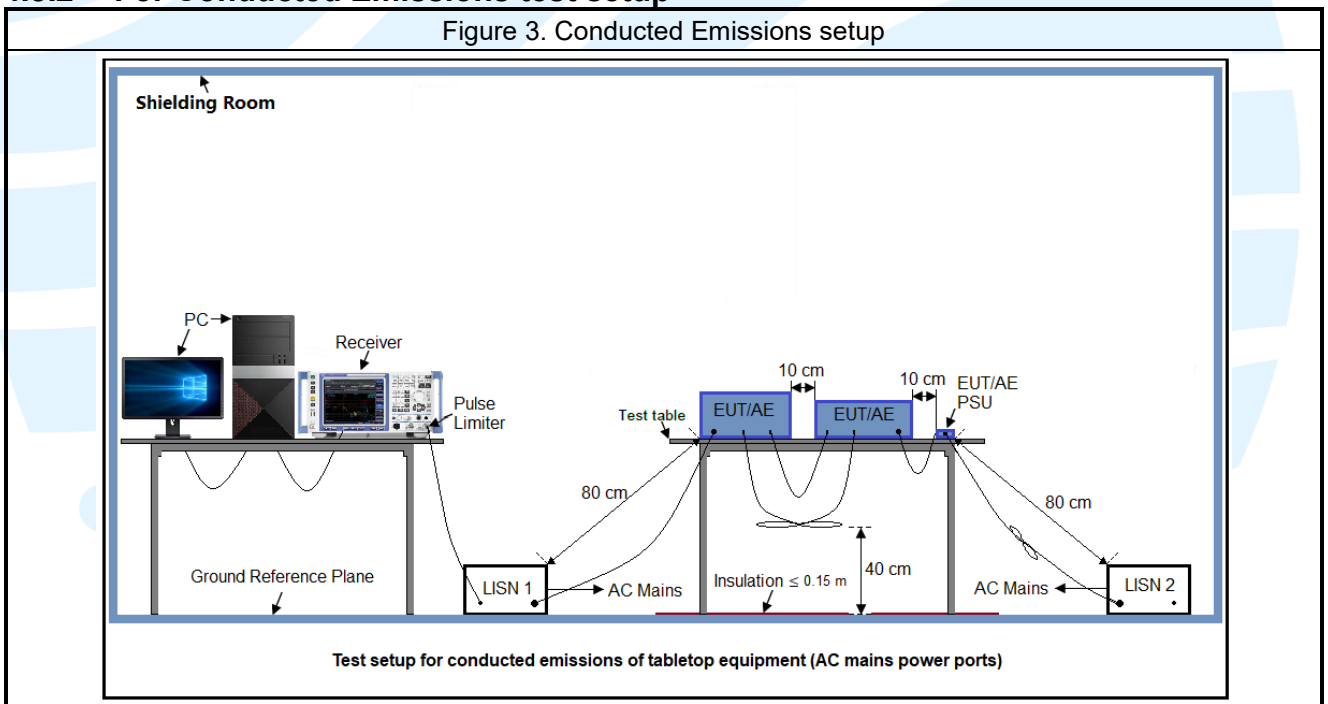

4.4 SYSTEM TEST CONFIGURATION

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic (according to KDB 896810 D02 SDoC FAQ v01r01) of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part15 Subpart B	Unintentional Radiators
2	ICES-003 Issue 7	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
4	KDB 174176 D01 Line Conducted FAQ v01r01	AC power-line conducted emission frequency asked questions
5	KDB 896810 D02 SDoC FAQ v01r02	Supplier's Declaration of Conformity frequency asked questions

6. EMC REQUIREMENTS SPECIFICATION

6.1 RADIATED EMISSION

Test Requirement: FCC 47 CFR Part 15.109
ICES-003 Issue 7 Clause 3.2.2

Test Method: ANSI C63.4-2014

Receiver Setup:

Frequency: (f) (MHz)	Detector type	Measurement receiver bandwidth	
		RBW	VBW
$30 \leq f \leq 1\,000$	Quasi Peak	120 kHz	300 kHz
$f \geq 1000$	Peak	1 MHz	3 MHz
	Average	1 MHz	3 MHz

Measured frequency range

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Limits:

Limits for Class A devices

FCC 47 CFR Part 15 Subpart B

Frequency (MHz)	limits at 3 m (dBµV/m)		
	QP Detector	PK Detector	AV Detector
30-88	49.5	--	--
88-216	54.0	--	--
216-960	56.9	--	--
960 to 1000	60.0	--	--
Above 1000	--	80.0	60.0

ICES-003 Issue 7

Frequency (MHz)	limits at 3 m (dBµV/m)		
	QP Detector	PK Detector	AV Detector
30 – 88	50.0	--	--
88 – 216	54.0	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

216 – 230	56.9	--	--
230 – 960	57.0	--	--
960 – 1000	60.0	--	--
Above 1000	--	80	60

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBµV/m) = 20 log Emission level (µV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.3.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:
 - 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
 - 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
 - 3) For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.
2. Above 1GHz test procedure as below:
 - 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
 - 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
 - 3) For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Equipment Used: Refer to section 3 for details.

Test Result: Pass


The measurement data as follows:

The measurement data for FCC 47 CFR Part 15 Subpart B as follows:


Below 1GHz (Quasi Peak):

Test Mode 1: AC120V/60Hz (Build-in Power 1) + LAN Port Loop transmission + POE out

Horizontal

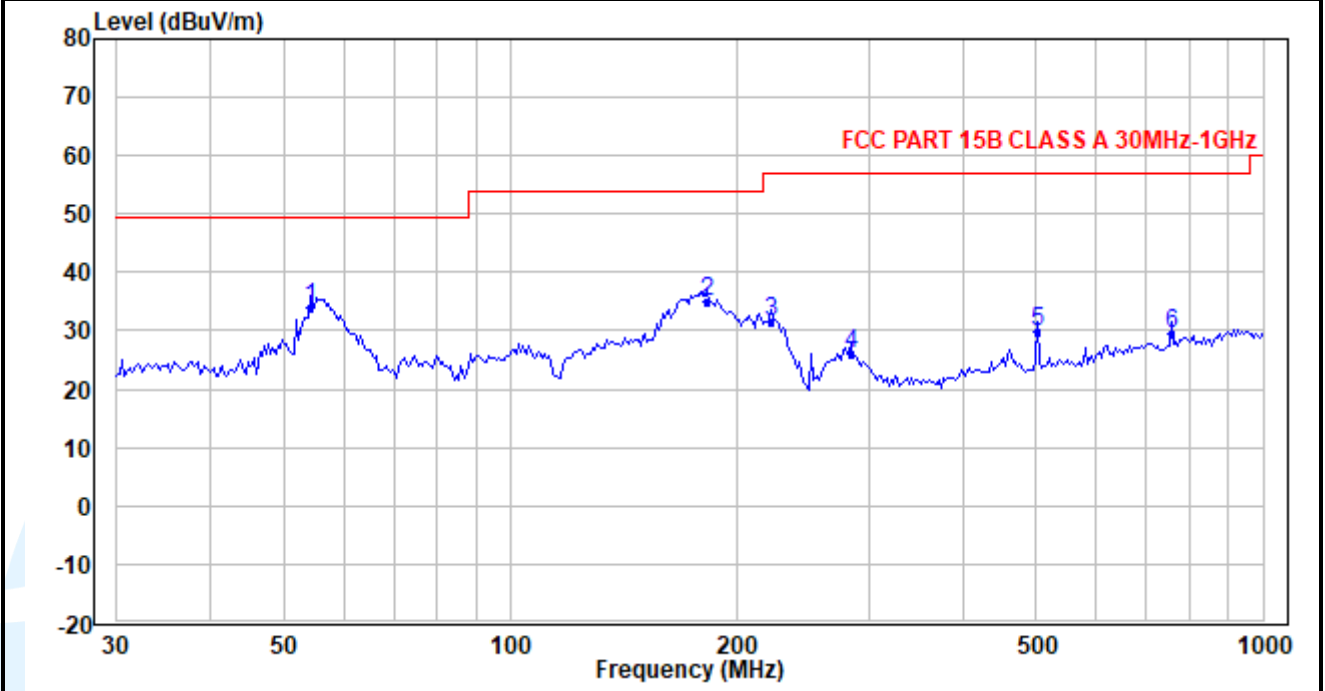

No.	Frequency (MHz)	Reading (dBµV)	Correction factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1	54.135	50.22	-16.33	33.89	49.50	-15.61	QP
2	182.578	44.96	-9.98	34.98	54.00	-19.02	QP
3	222.281	42.62	-10.98	31.64	56.90	-25.26	QP
4	284.261	33.24	-7.34	25.90	56.90	-31.00	QP
5	502.247	32.03	-2.35	29.68	56.90	-27.22	QP
6	754.963	27.45	2.01	29.46	56.90	-27.44	QP

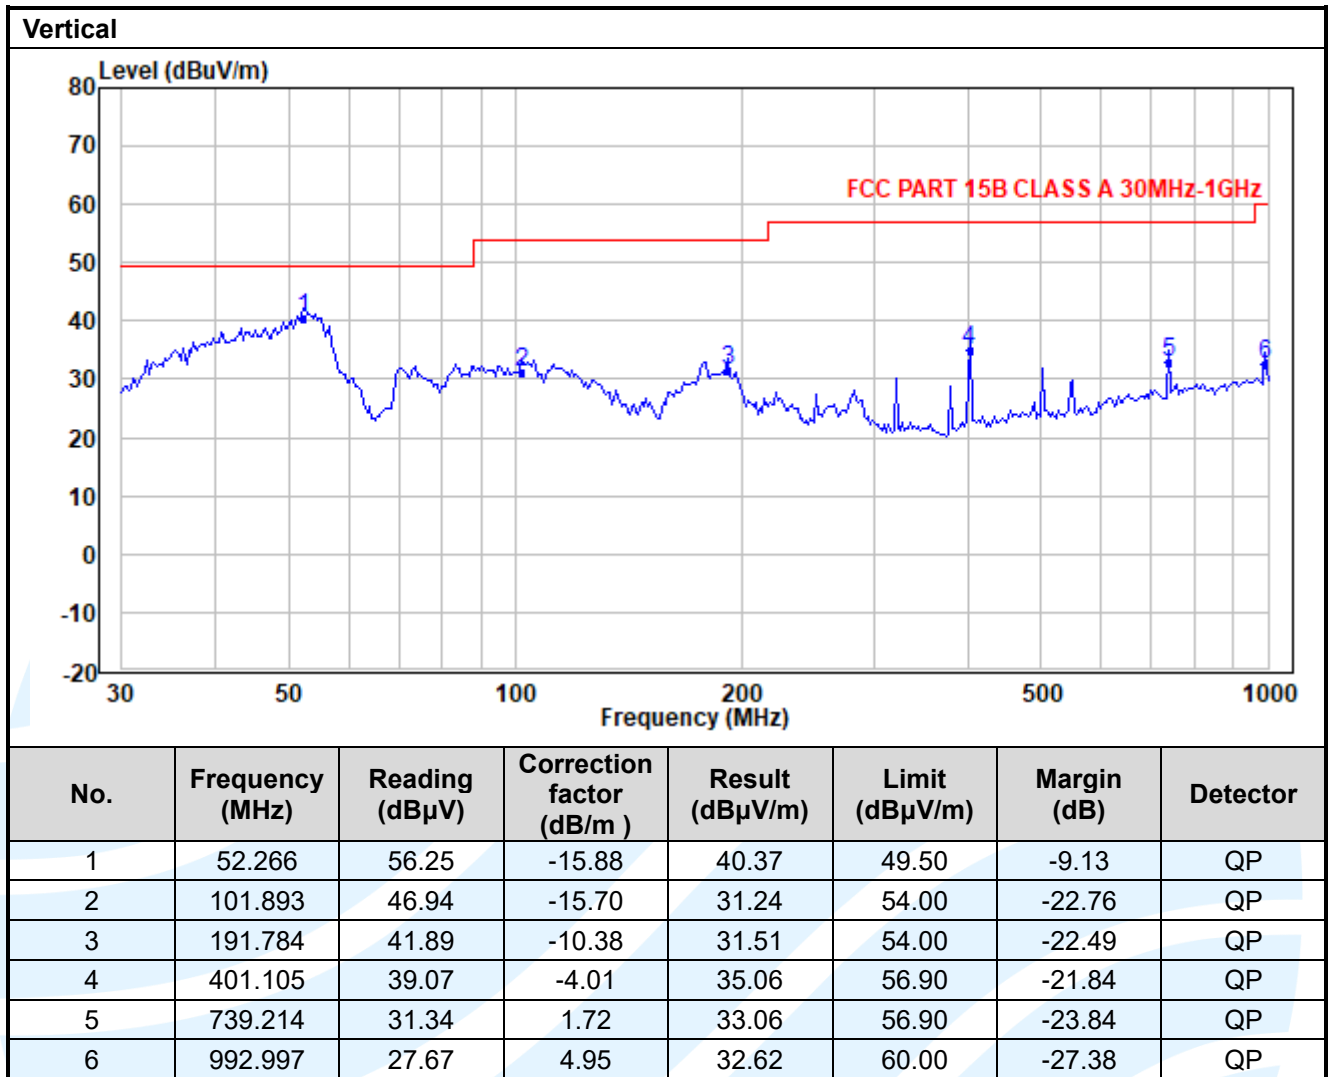

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Below 1GHz (Quasi Peak):
 Test Mode 4: AC240V/50Hz (Build-in Power 2) + LAN Port Loop transmission + POE out
 Horizontal

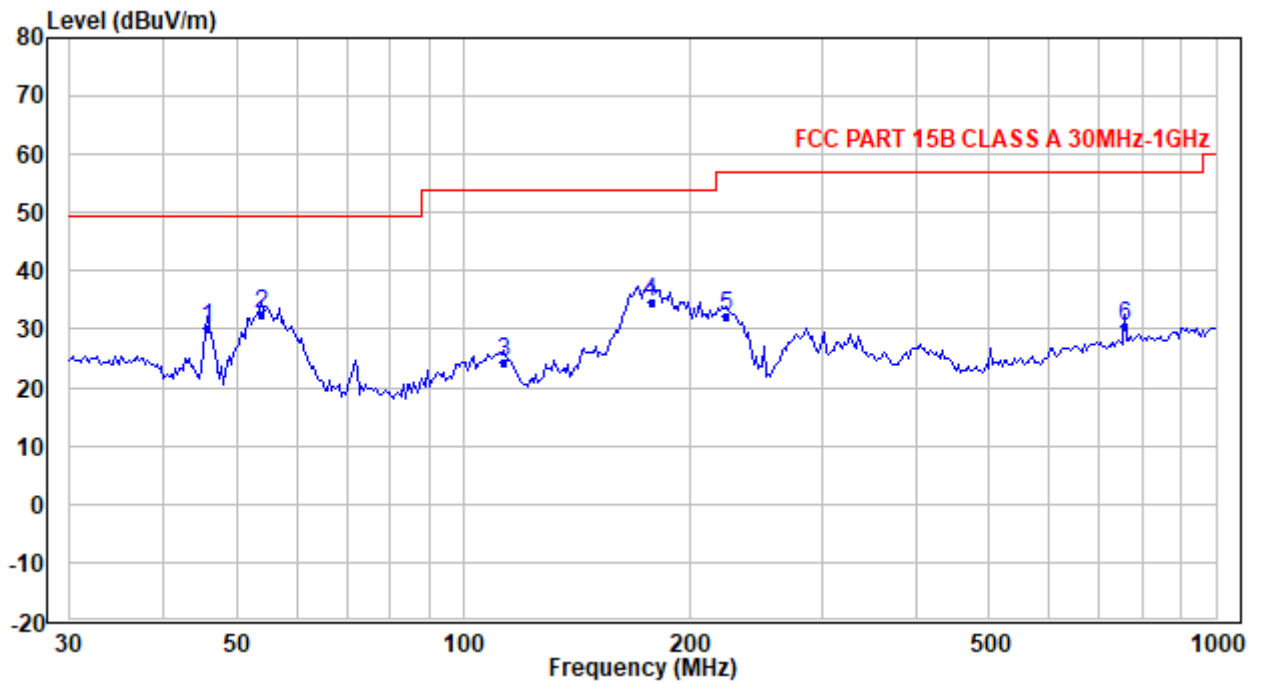

No.	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	45.733	42.24	-11.97	30.27	49.50	-19.23	QP
2	53.756	48.74	-16.24	32.50	49.50	-17.00	QP
3	113.220	40.15	-15.72	24.43	54.00	-29.57	QP
4	177.518	44.73	-10.13	34.60	54.00	-19.40	QP
5	223.848	43.15	-11.03	32.12	56.90	-24.78	QP
6	754.963	28.56	2.01	30.57	56.90	-26.33	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

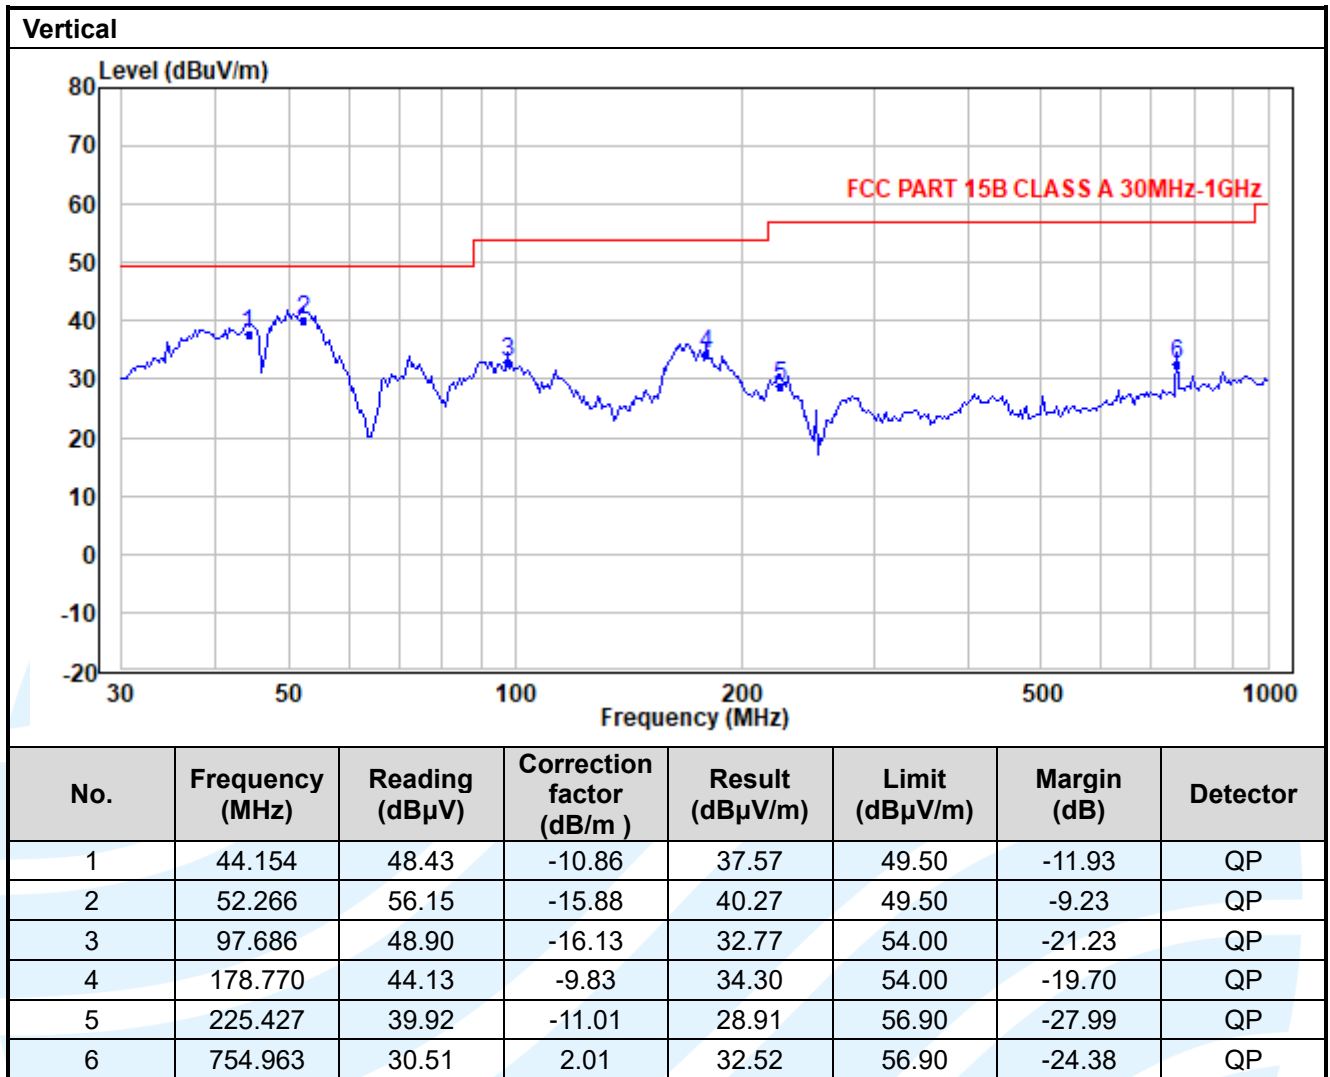

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit
4. All possible modes of operation were investigated, and testing at two nominal voltages of 240V/50Hz and 120V/60Hz, only the worst case emissions reported.
5. The limit of ICES-003 in the 230MHz to 960MHz band is higher than that of FCC Part 15B, so the radiation emission test data conform to the limit of ICES-003.

6.2 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15.107
ICES-003 Issue 7 Section 3.2.1

Test Method: ANSI C63.4-2014

Limits:

Limits for Class A devices

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.3.2 for details.

Test Procedures:

- 1) The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- 2) The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:


Quasi Peak and Average:

Test Mode 1: AC120V/60Hz (Build-in Power 1) + LAN Port Loop transmission + POE out

Live Line

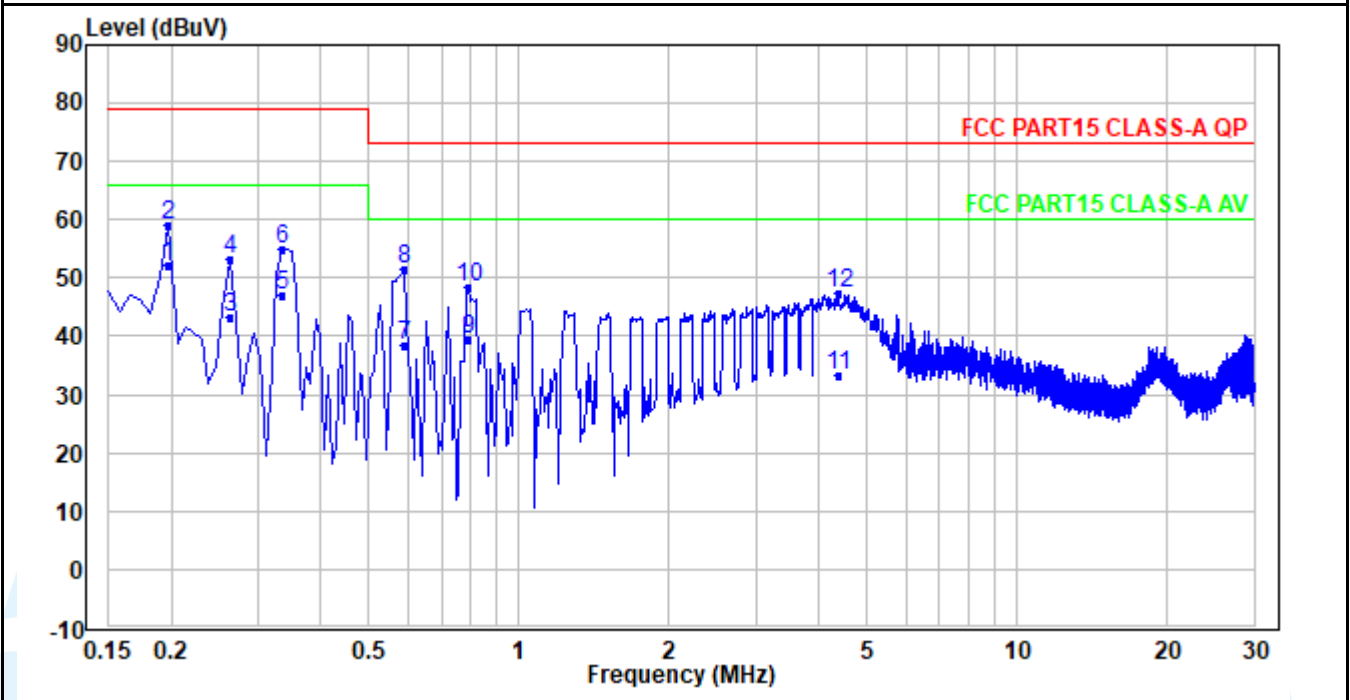

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.198	42.19	10.02	52.21	66.00	-13.79	Average
2	0.198	49.19	10.02	59.21	79.00	-19.79	QP
3	0.262	33.19	10.03	43.22	66.00	-22.78	Average
4	0.262	43.19	10.03	53.22	79.00	-25.78	QP
5	0.334	37.04	10.03	47.07	66.00	-18.93	Average
6	0.334	45.04	10.03	55.07	79.00	-23.93	QP
7	0.590	28.32	10.05	38.37	60.00	-21.63	Average
8	0.590	41.32	10.05	51.37	73.00	-21.63	QP
9	0.790	29.35	10.05	39.40	60.00	-20.60	Average
10	0.790	38.35	10.05	48.40	73.00	-24.60	QP
11	4.381	22.99	10.29	33.28	60.00	-26.72	Average
12	4.381	36.99	10.29	47.28	73.00	-25.72	QP

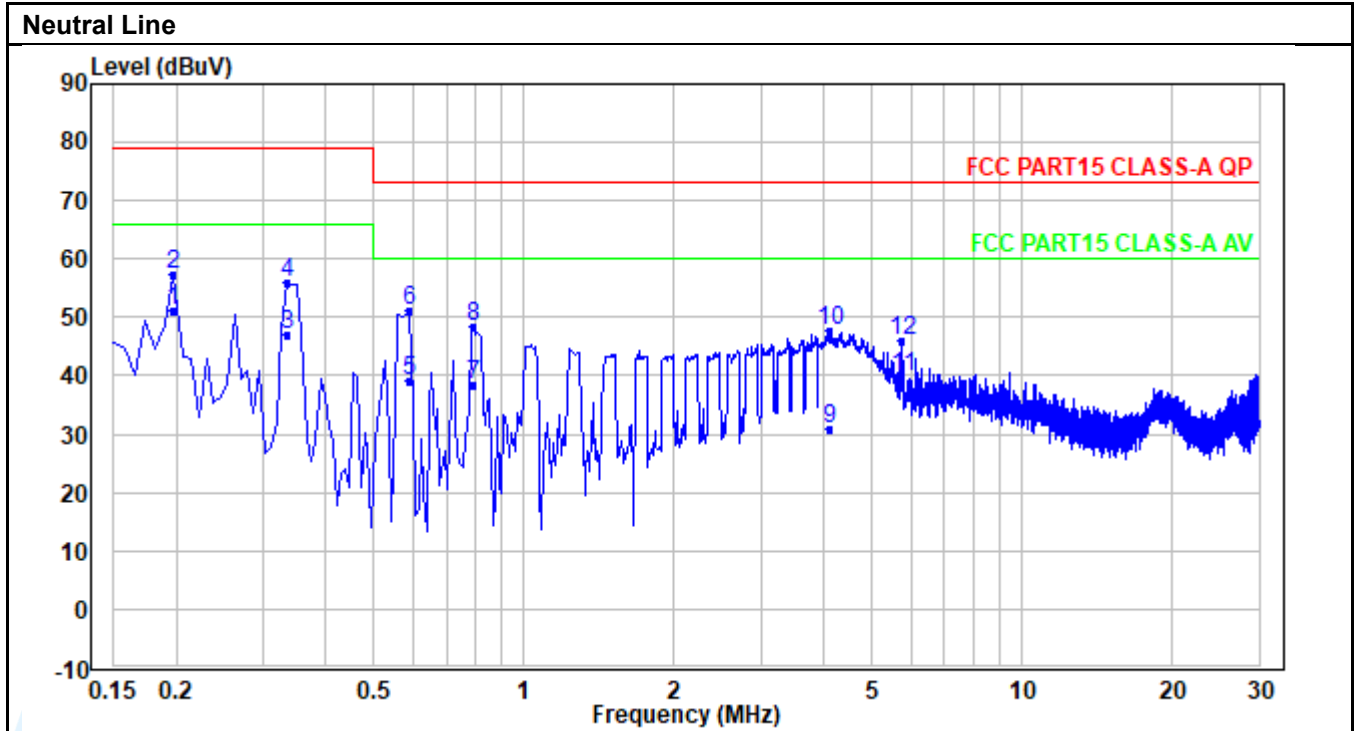

No.	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
1	0.198	41.25	10.00	51.25	66.00	-14.75	Average
2	0.198	47.25	10.00	57.25	79.00	-21.75	QP
3	0.334	36.86	10.02	46.88	66.00	-19.12	Average
4	0.334	45.86	10.02	55.88	79.00	-23.12	QP
5	0.590	29.22	10.03	39.25	60.00	-20.75	Average
6	0.590	41.22	10.03	51.25	73.00	-21.75	QP
7	0.790	28.35	10.04	38.39	60.00	-21.61	Average
8	0.790	38.35	10.04	48.39	73.00	-24.61	QP
9	4.109	20.62	10.27	30.89	60.00	-29.11	Average
10	4.109	37.62	10.27	47.89	73.00	-25.11	QP
11	5.765	29.55	10.35	39.90	60.00	-20.10	Average
12	5.765	35.55	10.35	45.90	73.00	-27.10	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-EMC-ICES003-V1.2

Quasi Peak and Average:
Test Mode 3: AC120V/60Hz (Build-in Power 2) + LAN Port Loop transmission + POE out

Live Line

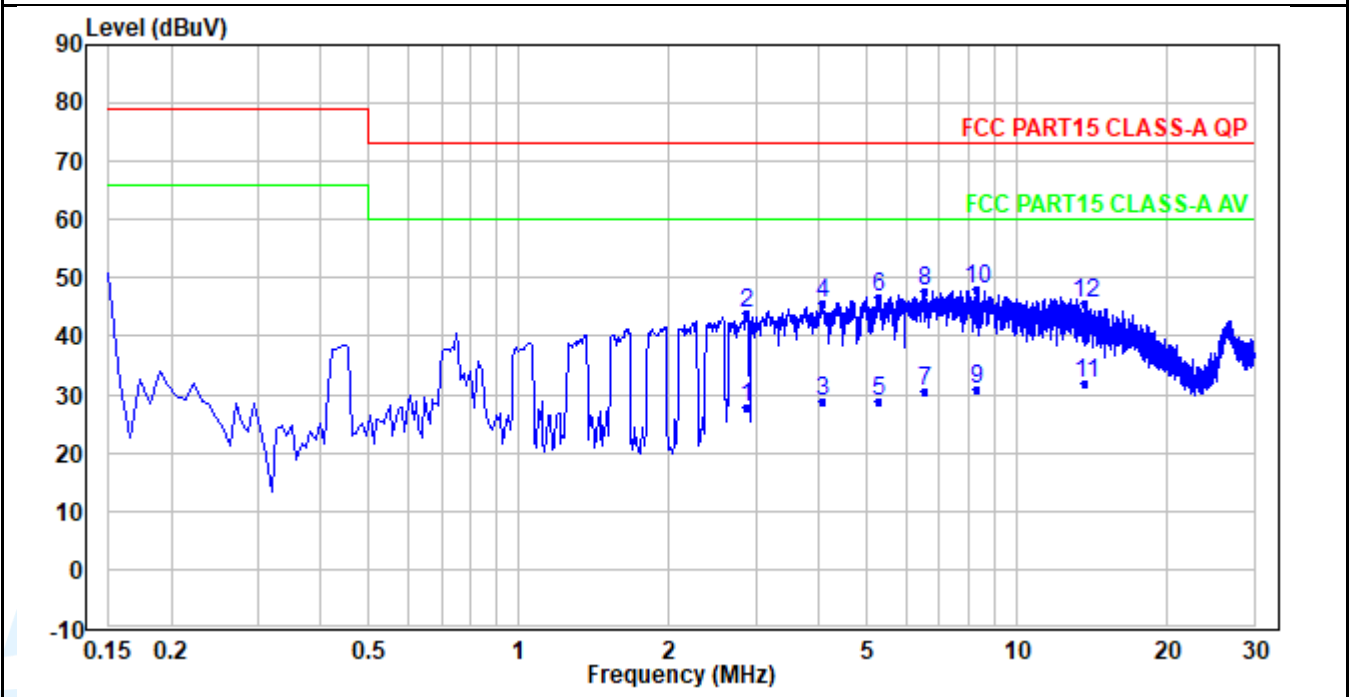

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	2.869	17.65	10.19	27.84	60.00	-32.16	Average
2	2.869	33.65	10.19	43.84	73.00	-29.16	QP
3	4.085	18.48	10.27	28.75	60.00	-31.25	Average
4	4.085	35.48	10.27	45.75	73.00	-27.25	QP
5	5.301	18.34	10.34	28.68	60.00	-31.32	Average
6	5.301	36.34	10.34	46.68	73.00	-26.32	QP
7	6.517	20.23	10.40	30.63	60.00	-29.37	Average
8	6.517	37.23	10.40	47.63	73.00	-25.37	QP
9	8.348	20.44	10.48	30.92	60.00	-29.08	Average
10	8.348	37.44	10.48	47.92	73.00	-25.08	QP
11	13.739	21.02	10.75	31.77	60.00	-28.23	Average
12	13.739	35.02	10.75	45.77	73.00	-27.23	QP

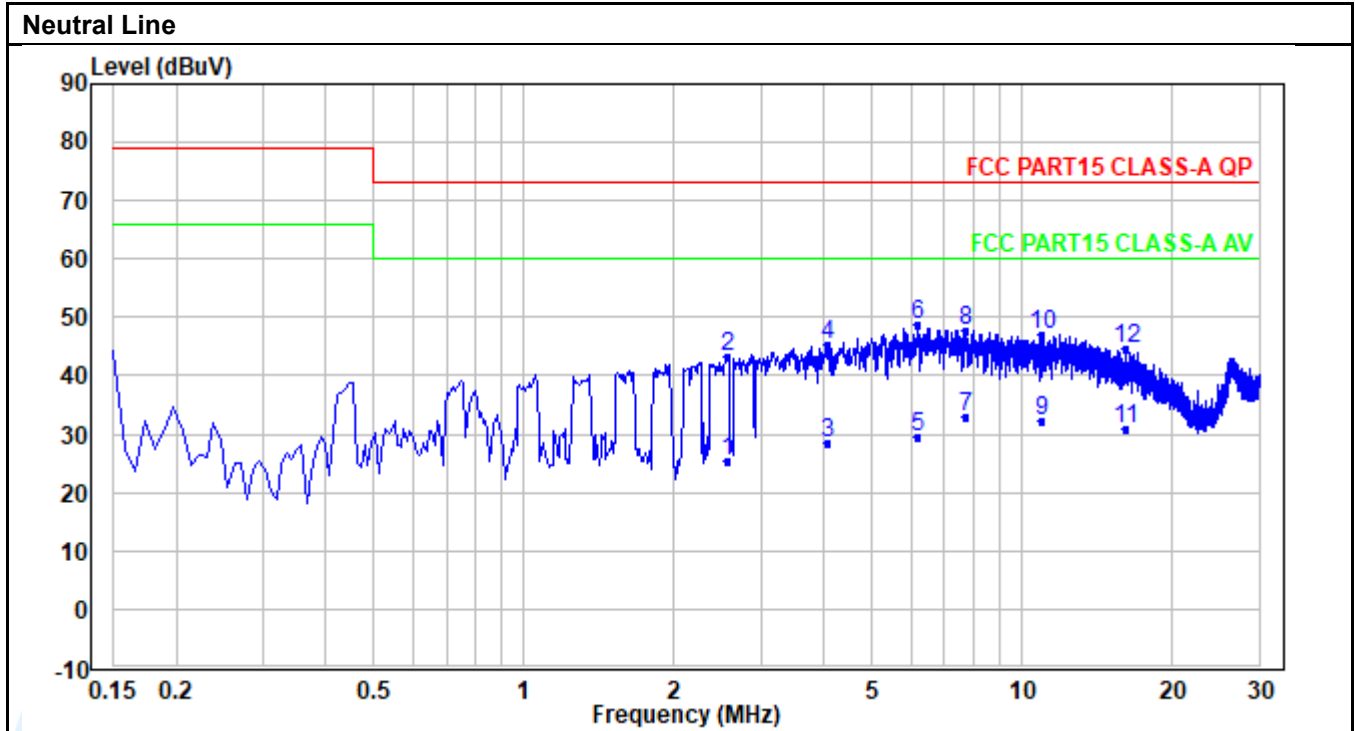

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	2.566	15.22	10.15	25.37	60.00	-34.63	Average
2	2.566	33.22	10.15	43.37	73.00	-29.63	QP
3	4.077	18.17	10.26	28.43	60.00	-31.57	Average
4	4.077	35.17	10.26	45.43	73.00	-27.57	QP
5	6.173	19.29	10.37	29.66	60.00	-30.34	Average
6	6.173	38.29	10.37	48.66	73.00	-24.34	QP
7	7.724	22.39	10.42	32.81	60.00	-27.19	Average
8	7.724	37.39	10.42	47.81	73.00	-25.19	QP
9	10.980	21.54	10.57	32.11	60.00	-27.89	Average
10	10.980	36.54	10.57	47.11	73.00	-25.89	QP
11	16.171	19.80	10.92	30.72	60.00	-29.28	Average
12	16.171	33.80	10.92	44.72	73.00	-28.28	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V/50Hz and 120V/60Hz, only the worst case emissions reported.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
