

## FCC WIRELESS EQUIPMENT TEST REPORT

On Model Name: IP Multimedia Phone

Model Numbers: GXV3175

Brand Name: Grandstream

FCC ID Number: YZZGXV3175-T

Prepared for Grandstream Networks,INC

Test Specification: FCC 47 CFR Part 15, Subpart C

Test Report #: SHE-1208-10861-FCC ID

Tested by: Daomen Galanz  
Daomen/Engineer Company Name

Reviewed by: Jawen Yin ECMG  
Jawen Yin/Senior Engineer Company Name

QC Manager: Swall Zhang ECMG  
Swall Zhang/QC Manager Company Name

Test Report Released by: Swall Zhang September 25<sup>th</sup>, 2012  
Swall Zhang Date

## List of Attached Files

<i>Exhibit Type</i>	<i>File Description</i>	<i>File Name</i>
<i>Test Report</i>	<i>Test Report</i>	<i>YZZGXV3175-T _Test report.pdf</i>
<i>Operation Description</i>	<i>Technical Description</i>	<i>YZZGXV3175-T _operation description.pdf</i>
<i>External Photos</i>	<i>External Photos</i>	<i>YZZGXV3175-T _External Photos.pdf</i>
<i>Internal Photos</i>	<i>Internal Photos</i>	<i>YZZGXV3175-T _Internal Photos.pdf</i>
<i>Block Diagram</i>	<i>Block Diagram</i>	<i>YZZGXV3175-T _Block Diagram.pdf</i>
<i>Schematics</i>	<i>Circuit Diagram</i>	<i>YZZGXV3175-T _Schematics.pdf</i>
<i>ID Label/Location</i>	<i>Label and Location</i>	<i>YZZGXV3175-T _Label &amp; Location.pdf</i>
<i>User Manual</i>	<i>User Manual</i>	<i>YZZGXV3175-T _User Manual.pdf</i>
<i>Test set-up photos</i>	<i>Test setup photos</i>	<i>YZZGXV3175-T _Test Set-up Photos.pdf</i>

## **Test Location**

*Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.*

*Test Site Location : Galanz*

*25 South Ronggui Rd., Shunde, Foshan,  
Guangdong, China*

*Tel : (86)-757-23612785*

*Fax : (86)-757-23612537*

## **Test Facility**

*The test facility was recognized, certified, or accredited by the following organizations:*

- **CNAL - LAB Code: L2244**

*Galanz EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.*

- **FCC - Registration No.: 580210**

*Galanz EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.*

### List of Test and Measurement Instruments

<i>Equipment</i>	<i>Manufacturer</i>	<i>Model No.</i>	<i>Serial No.</i>	<i>Calibrated Untill</i>
<i>Spectrum Analyzer</i>	<i>R&amp;S</i>	<i>FSP30</i>	<i>100755</i>	<i>2012-11-30</i>
<i>EMI Receiver</i>	<i>SCHAFFNER</i>	<i>SMR4503</i>	<i>11725</i>	<i>2012-11-30</i>
<i>LISN</i>	<i>ETS</i>	<i>4825/2</i>	<i>1161</i>	<i>2012-11-30</i>
<i>Coaxial Cable</i>	<i>ATC</i>	<i>---</i>	<i>---</i>	<i>2012-11-30</i>
<i>Double-ridged Wave guide horn</i>	<i>ETS</i>	<i>3115</i>	<i>6587</i>	<i>2012-11-30</i>
<i>3116C Double-Ridged Waveguide Horn</i>	<i>ETS-Lindgren</i>	<i>3116C</i>	<i>6587/01</i>	<i>2012-11-30</i>
<i>Amplifier</i>	<i>Agilent</i>	<i>83017A</i>	<i>MY39500438</i>	<i>2012-11-30</i>
<i>Band filter</i>	<i>ASI</i>	<i>82346</i>	<i>S06389</i>	<i>2012-11-30</i>
<i>Biconilog Antenna</i>	<i>ETS</i>	<i>3142C</i>	<i>00042672</i>	<i>2012-11-30</i>
<i>Semi-anechoic Chamber</i>	<i>ETS</i>	<i>---</i>	<i>---</i>	<i>2012-11-30</i>

*Note: All testing were performed using internationally recognized standards.All test instruments were calibrated.*

# ***Table of Contents***

---

<b><i>DISCLAIMER NOTICE</i></b> .....	<b><i>1</i></b>
<b><i>REPRODUCTION CLAUSE</i></b> .....	<b><i>1</i></b>
<b><i>OPINIONS AND INTERPRETATIONS</i></b> .....	<b><i>1</i></b>
<b><i>STATEMENT OF MEASUREMENT UNCERTAINTY</i></b> .....	<b><i>1</i></b>
<b><i>ADMINISTRATIVE DATA</i></b> .....	<b><i>2</i></b>
<b><i>EUT DESCRIPTION</i></b> .....	<b><i>3</i></b>
<b><i>TEST SUMMARY</i></b> .....	<b><i>5</i></b>
<b><i>TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL</i></b> .....	<b><i>6</i></b>
<b><i>EUT EXERCISE SOFTWARE</i></b> .....	<b><i>7</i></b>
<b><i>EQUIPMENT MODIFICATION</i></b> .....	<b><i>7</i></b>
<b><i>TEST SYSTEM DETAILS</i></b> .....	<b><i>8</i></b>
<b><i>ATTACHMENT 1 - ANTENNA REQUIREMENT</i></b> .....	<b><i>9</i></b>
<b><i>ATTACHMENT 2 - CONDUCTED EMISSION TEST RESULTS</i></b> .....	<b><i>11</i></b>
<b><i>ATTACHMENT 3- RADIATED EMISSION TEST</i></b> .....	<b><i>14</i></b>
<b><i>ATTACHMENT 4 - OCCUPIED BANDWIDTH TEST</i></b> .....	<b><i>43</i></b>
<b><i>ATTACHMENT 5- MAXIMUM PEAK OUTPUT POWER</i></b> .....	<b><i>51</i></b>
<b><i>ATTACHMENT 6 - BAND EDGES TEST</i></b> .....	<b><i>59</i></b>
<b><i>ATTACHMENT 7 - PEAK POWER SPECTRAL DENSITY TEST</i></b> .....	<b><i>88</i></b>
<b><i>ATTACHMENT: TEST SET-UP PHOTOGRAPH</i></b> .....	<b><i>96</i></b>

### **Disclaimer Notice**

*When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.*

### **Reproduction Clause**

*Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).*

### **Opinions and Interpretations**

*This test report relates to the abovementioned equipment under test (EU T). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen). Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.*

### **Statement of Measurement Uncertainty**

*The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.*

## **Administrative Data**

*Test Sample* : *IP Multimedia Phone*

*Model Name* : *GXV3175*

*Model Tested* : *GXV3175*

*Receipt Date* : *August 16<sup>th</sup>, 2012*

*Date Tested* : *August 17<sup>th</sup>, 2012 to September 6<sup>th</sup>, 2012*

*Applicant* : *Grandstream Networks, INC*

*Address* : *5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China*

*Telephone* : *(86)-755-26014600*

*Fax* : *(86)-755-26014601*

*Manufacturer* : *Grandstream Networks, INC*

*Address* : *5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China*

*Telephone* : *(86)-755-26014600*

*Fax* : *(86)-755-26014601*

*Factory* : *Grandstream Networks, INC*

*Address* : *5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China*

*Telephone* : *(86)-755-26014600*

*Fax* : *(86)-755-26014601*

## EUT Description

Grandstream Networks, Inc., model tested GXV3175 (referred to as the EUT in this report) is an IP Multimedia Phone.

The EUT is an IP multimedia phone which integrates an IEEE 802.11 b/g/n wireless module. Main technical specifications of the EUT are as follows:

Parameter		Range																															
Basic parameters	Rated voltage	DC12V																															
	Rated Current	1.5A																															
802.11b/g/n Module Parameters	Operating band	2400-2483.5MHz																															
	WIFI Module Voltage	5.0VDC $\pm$ 5% (or 3.3VDV $\pm$ 5% upon special requirement)																															
	Working Frequency of Each Channel	<table border="1"> <thead> <tr> <th>Channel No.</th> <th>Frequency (MHz)</th> <th>Channel No.</th> <th>Frequency (MHz)</th> </tr> </thead> <tbody> <tr> <td>001</td> <td>2412</td> <td>007</td> <td>2442</td> </tr> <tr> <td>002</td> <td>2417</td> <td>008</td> <td>2447</td> </tr> <tr> <td>003</td> <td>2422</td> <td>009</td> <td>2452</td> </tr> <tr> <td>004</td> <td>2427</td> <td>010</td> <td>2457</td> </tr> <tr> <td>005</td> <td>2432</td> <td>011</td> <td>2462</td> </tr> <tr> <td>006</td> <td>2437</td> <td>--</td> <td>--</td> </tr> </tbody> </table>				Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	001	2412	007	2442	002	2417	008	2447	003	2422	009	2452	004	2427	010	2457	005	2432	011	2462	006	2437	--	--
		Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)																												
		001	2412	007	2442																												
		002	2417	008	2447																												
		003	2422	009	2452																												
		004	2427	010	2457																												
005		2432	011	2462																													
006	2437	--	--																														
Frequency of Number	IEEE 802.11b/g: 11 channels; Draft 802.11n standard 20MHz: 11 channels; Draft 802.11n standard 40MHz: 7 channels.																																
Modulation Type	802.11b: DBPSK, DQPSK, CCK (DSSS); 802.11g/n: BPSK, QPSK, 16-QAM, 64-QAM (OFDM)																																
RF Power	802.11b/g: max 17dBm $\pm$ 2%.; 802.11n: max 15dBm $\pm$ 2%																																
Data Transfer Rate	11n: up to 150Mbps 11g: 54/48/36/24/18/12/9/6Mbps (Dynamic) 11b: 11/5.5/2/1Mbps (Dynamic)																																
Antenna Spec.	<ol style="list-style-type: none"> <li>Gain: 2dBi</li> <li>Impedance: 50ohm</li> <li>One U.FL-R-SMT antenna connector(1T1R)</li> </ol>																																

Continue on the next page...



<i>I/O Ports</i>	<i>Ethernet Port</i>	<i>10/100Mbps RJ-45 port connecting to PC</i>
	<i>Network Ethernet Port</i>	<i>10/100Mbps RJ-45 port connecting to Ethernet</i>
	<i>Power Jack</i>	<i>12V DC Power connector port12V DC Power connector port</i>
	<i>RJ11 Jack</i>	<i>Phone handset connector port</i>
	<i>USB Port</i>	<i>USB devices may be connected via the USB port</i>
	<i>SD Card Slot</i>	<i>SD card could be inserted in for picture/music/video files storage</i>
	<i>HDMI</i>	<i>High-Definition Multimedia Interface</i>
<i>Power Module</i>	<i>Headset Jack</i>	<i>3.5mm stereo headset connector port</i>
	<i>Input</i>	<i>100-240VAC 50/60Hz 0.4A</i>
	<i>Output</i>	<i>12VDC,1.5A,</i>
	<i>Model</i>	<i>SFF1200150A1BB</i>
	<i>Brand name</i>	<i>Mass</i>

*NOTE: For more detailed informations or features please refer to user's manual of EUT.*

## Test Summary

The Electromagnetic Compatibility requirements on tested model GXV 3175 for this test is stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment Under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Tested model GXV3175 has been tested to conform to the following parts of the Part 15, Subpart C as detailed belows:

<b>FCC Rules</b>	<b>Requirement</b>	<b>Result</b>	<b>Remark</b>
§15.247(c)(1)(i); §15.203	Antenna Requirement	Compliant	Attachment 1
§15.207	Conducted Emission	Compliant	Attachment 2
§15.205(a); §15.209(a)	Radiated Emission	Compliant	Attachment 3
§15.247(b)	Maximum Peak Output Power	Compliant	Attachment 4
§15.247(a)(2)	Occupied Bandwidth	Compliant	Attachment 5
§15.247(d)	Edges Measurement	Compliant	Attachment 6
§15.247(e)	Power Spectral Density	Compliant	Attachment 7

## Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rate and antenna diversity (if any).

Regards to the frequency band over 10MHz, the lowest, middle and highest frequency of channel were selected to perform the test, and then shown on this report.

The following mode & channels were chosen for final test as listed belows.

For IEEE 802.11b/g mode and IEEE 802.11n HT20 mode:

Carried Frequency (MHz)	Channel	Duty Cycle	Data Rate (Mbps)	Modulation Type
2412	Channel Low	100%	IEEE 802.11b: 1Mbps; IEEE 802.11g: 6Mbps; IEEE 802.11n HT20: 6.5Mbps; IEEE 802.11n HT40: 13.5Mbps	IEEE 802.11b for DSSS, IEEE 802.11g and 802.11n HT20 For OFDM
2437	Channel Mid			
2462	Channel High			

For IEEE 802.11n HT40 mode:

Carried Frequency (MHz)	Channel Type & Number	Duty Cycle	Data Rate (Mbps)	Modulation Type
2422	Channel Low	100%	13.5Mbps	OFDM
2437	Channel Mid			
2452	Channel High			

### ***EUT Exercise Software***

*During testing an exercise software which "RaUI.EXE" was provided by Grandstream Networks,Inc., runs on windows XP system and control IEEE 802.11b/g/n module operating on a continuous transmission mode and receive mode.*

### ***Equipment Modification***

*Any modifications installed previous to testing by Grandstream Networks,Inc., will be incorporated in each production model sold or leased in United States.*

*There were no modifications for this EUT intended for grant.*

## Test System Details

<b>EUT</b>			
<b>Model Number:</b>	GXV3175		
<b>Description:</b>	IP Multimedia Phone		
<b>Manufacturer:</b>	Grandstream Networks, Inc		
<b>Input Voltage:</b>	120VAC/60Hz		
<b>Support Equipment</b>			
<b>Description</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Manufacturer</b>
Notebook PC	NC4000	CNU4122BCL	HP
Power Of Notebook PC	PPP009H	239427-003	HP

<b>Cable Description</b>					
<b>Description</b>	<b>From</b>	<b>to</b>	<b>Length (Meters)</b>	<b>Shielded (Y/N)</b>	<b>Ferrite (Y/N)</b>
Power Cord Of Notebook PC	Adaptor	Notebook PC	1.6	N	Y
	Notebook PC	AC Plug	1.2	N	Y
Power adaptor of EUT	EUT	Plug	2.4	N	N
Note: The "EUT" means "IP Multimedia Phone".					

**NOTE:** The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.

## **ATTACHMENT 1 - ANTENNA REQUIREMENT**

### **§15.203 Requirements:**


*An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.*

### **§15.247(c) (1)(i) Requirements:**

*(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.*


FCC Section	FCC Rules	Conclusion
<p>§15.203&amp; §15.207 (c) (1) (i)</p>	<p><i>Described how the EUT complies with the requirements that either its antenna is permanently attached, or that it employ a unique antenna connector, for every antenna proposed for use with the EUT.</i></p> <p><i>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</i></p> <ol style="list-style-type: none"> <li><i>1. The application (or intended use) of the EUT.</i></li> <li><i>2. The installation requirements of the EUT.</i></li> <li><i>3. The method by which the EUT will be marketed.</i></li> </ol>	<p><i>The maximal gain of the antenna is 2.0 dBi and use a unique connector.</i></p> <p><i>So the unit do meet requirement.</i></p>

## ATTACHMENT 2 - CONDUCTED EMISSION TEST RESULTS

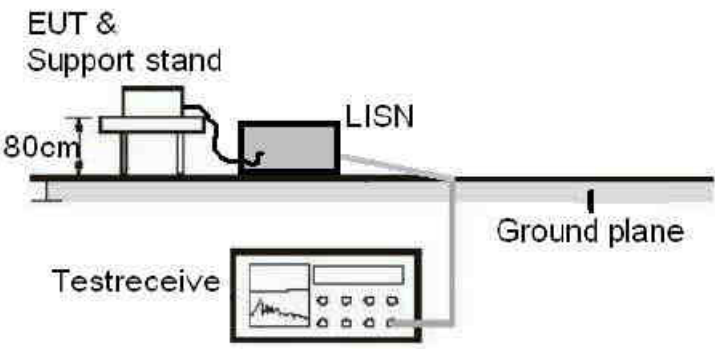
<b>CLIENT:</b>	GRANDSTREAM NETWORKS,INC.	<b>TEST STANDERD:</b>	Section 15.207
<b>MODEL NUMBERS:</b>	GXV3175	<b>PRODUCT:</b>	IP Multimedia Phone
<b>EUT MODEL:</b>	GXV3175	<b>EUT DESIGNATION:</b>	Digital Transmission Device
<b>TEMPERATURE:</b>	23°C	<b>HUMIDITY:</b>	47%RH
<b>ATM PRESSURE:</b>	101.0kPa	<b>GROUNDING:</b>	None
<b>TESTED BY:</b>	Daomen	<b>DATE OF TEST:</b>	August 17 <sup>th</sup> , 2012
<b>TEST REFERENCE:</b>	ANSI C63.10:2009		
<b>TEST PROCEDURE:</b>	The EUT was set up according to the guidelines of ANSI C63.10:2009 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range.The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged.		
<b>TEST SETUP</b>	 <p>The diagram illustrates the test setup. An EUT is placed on a support stand at a height of 80cm. It is connected to a LISN (Line Impedance Stabilization Network). The LISN is connected to a Testreceive unit, which is connected to a Ground plane.</p>		
<b>DESCRIPTIONS OF TEST MODE:</b>	Set to WI-FI mode,communicate with a notebook PC by wireless router nearby.		
<b>TESTED RANGE:</b>	150kHz to 30MHz		
<b>TEST VOLTAGE:</b>	120VAC/60Hz		
<b>RESULTS:</b>	The EUT meet the requirements of test reference for conducted emissions at AC input port.The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp $\pm 2.6$ dB		



**For Wi-Fi mode:**

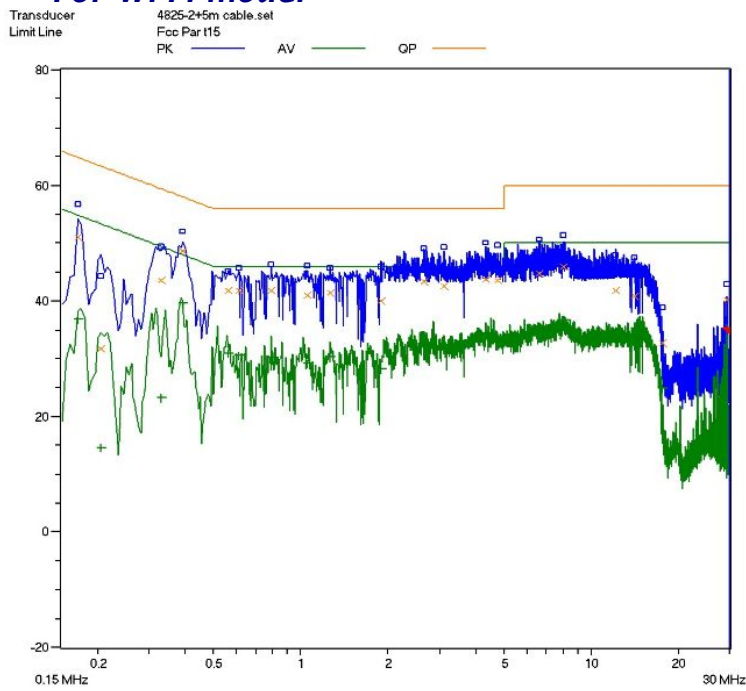

**Line L Conducted Emission Graph**

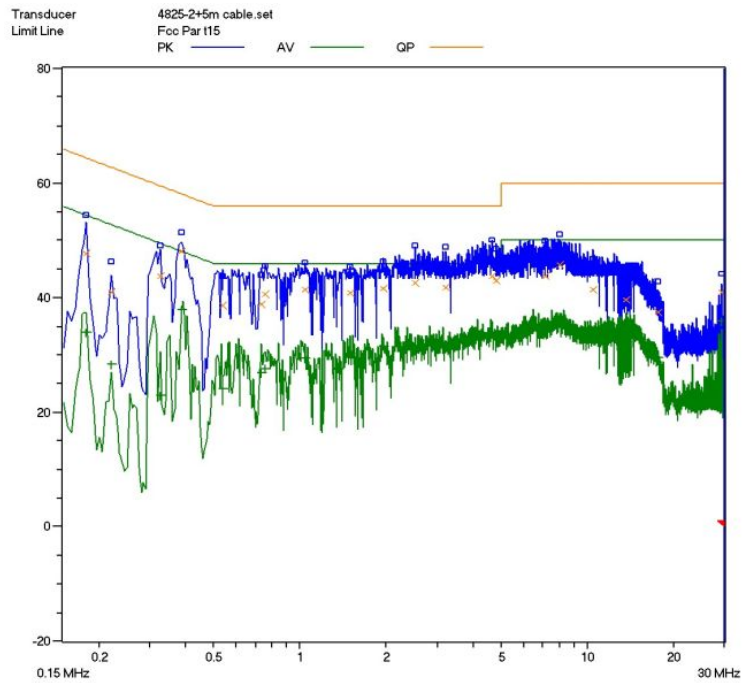

**Line N Conducted Emission Graph**



**Conducted Emission Test Data:**

Line	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
<b>Wi-Fi mode:</b>								
L	0.170	51.1	64.9	-13.8	0.170	36.9	54.9	-18.0
L	0.390	48.0	58.0	-10.0	0.390	39.7	48.0	-8.3
L	7.890	45.9	60.0	-14.1	7.890	36.6	50.0	-13.4
L	/	/	/	/	/	/	/	/
L	/	/	/	/	/	/	/	/
L	/	/	/	/	/	/	/	/
N	0.180	47.8	64.4	-16.6	0.180	33.9	54.4	-20.5
N	0.385	48.1	58.2	-10.1	0.385	37.8	48.2	-10.4
N	7.995	45.7	60.0	-14.3	7.995	36.6	50.0	-13.4
N	/	/	/	/	/	/	/	/
N	/	/	/	/	/	/	/	/
N	/	/	/	/	/	/	/	/
<p>Note :</p> <p>1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not use.</p> <p>2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.</p> <p>3) The symbol "/" means other emission readings are too low against official limits that are not be recorded.</p>								

### ATTACHMENT 3- RADIATED EMISSION TEST

<b>CLIENT:</b>	GRANDSTREAM NETWORKS,INC.	<b>TEST STANDERD:</b>	Section 15.209(a), Section 15.205(a)
<b>MODEL NUMBERS:</b>	GXV3175	<b>PRODUCT:</b>	IP Multimedia Phone
<b>EUT MODEL:</b>	GXV3175	<b>EUT DESIGNATION:</b>	Digital Transmission Device
<b>TEMPERATURE:</b>	23°C	<b>HUMIDITY:</b>	47%RH
<b>ATM PRESSURE:</b>	101.0kPa	<b>GROUNDING:</b>	None
<b>TESTED BY:</b>	Daomen	<b>DATE OF TEST:</b>	September 5 <sup>th</sup> , 2012
<b>TEST REFERENCE:</b>	ANSI C63.10:2009		
<b>TEST PROCEDURE:</b>	<p>The EUT was set up according to the guidelines of ANSI C63.10:2009 for radiated emissions. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Test procedure as follow:</p> <ol style="list-style-type: none"> <li>The EUT is placed on a turntable, which is 0.8 m above ground plane.The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.</li> <li>The EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.</li> <li>Maximum procedure was performed on the six highest emissions to ensure EUT compliance.</li> <li>And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.</li> <li>Repeat above procedures until the measurements for all frequencies are complete.</li> </ol>		
<b>DESCRIPTION OF TEST MODE</b>	<p><b>For below 1GHz:</b></p> <p>Set to Wi-Fi operation mode, pre-scan all channels of the IEEE 802.11b/g/n, and found the 801.11b mode, channel 1 with data rate of 1Mbps which is worst case mode. So IEEE 802.11b mode,channel 1 with data rate of 1Mbps was chosen for the final test and recorded in report.</p> <p><b>For above 1GHz:</b></p> <p>Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations,data rate and antenna ports (if EUT with antenna diversity architecture). Following channels were chosen for the final test as listed below: 802.11b mode with data rate of 1Mbps, 802.11g mode with data rate of 6Mbps, 802.11n HT20 mode with data rate of 6.5Mbps and 802.11n HT40 mode with data rate of 13.5Mbps.</p>		

<b>MEASUREMENT SETUP:</b>	Measurement receiver shall be set as below:				
	Frequency (MHz)	Receive detector	RBW	VBW	Value
	30-1000	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1000	Peak	1MHz	1MHz	Peak
	Above 1000	Peak	1MHz	10Hz	average
<b>LIMITS:</b>	Section 15.209 limits as below:				
	<i>Other Frequency (MHz)</i>	<i>Field strength</i>			
		<i>(uV/meter)</i>	<i>dB uV/meter</i>		
	30-88	100	40.0		
	88-216	150	43.5		
	216-960	200	46.0		
	Above 960	500	54.0		
	NOTE:				
	1) Field Strength (dBmV/m)= 20log Field Strength (mV/m).				
	2) In the emission tables above,the tighter limit applies at the band edge.				
<b>TESTED RANGE:</b>	30MHz to 25GHz				
<b>TEST VOLTAGE:</b>	120VAC/60Hz				
<b>RESULTS:</b>	According to the data in the following,the EUT complied with the FCC Part 15.209 &15.205. The test results relate only to the equipment under test provided by client.				
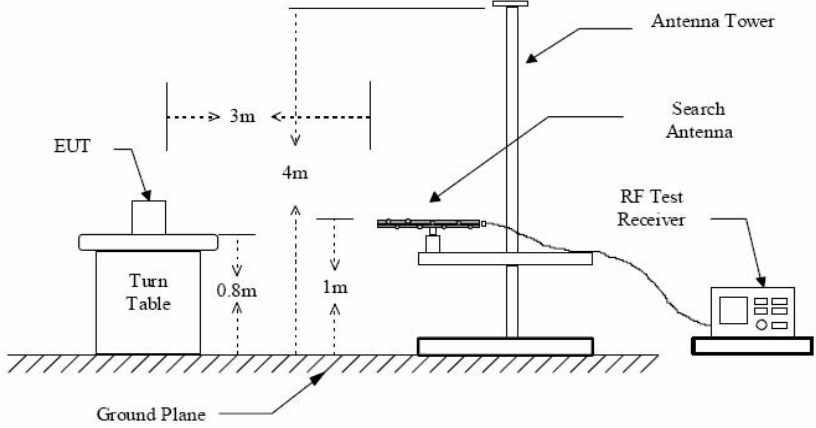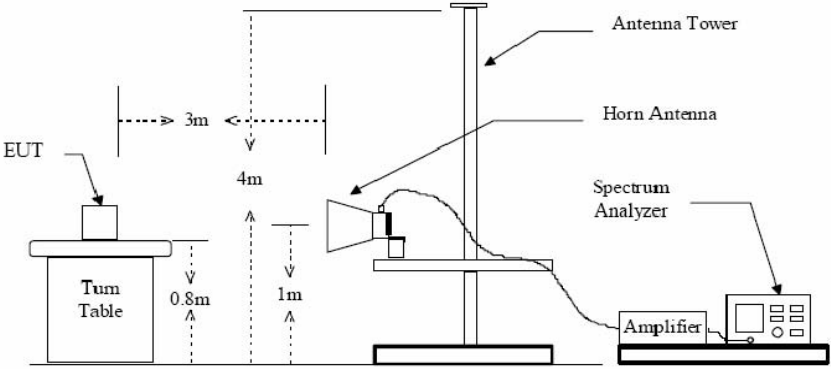
<p><b>TEST SETUP:</b></p>	<p style="text-align: center;">Figure 1 : Frequencies measured below 1 GHz configuration</p>  <p style="text-align: center;">Figure 2 : Frequencies measured above 1 GHz configuration</p> 
<p><b>CHANGES OR MODIFICATIONS:</b></p>	<p>There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.</p>
<p><b>M. UNCERTAINTY:</b></p>	<p>Freq. <math>\pm 2 \times 10^{-7}</math> x Center Freq., Amp <math>\pm 2.1</math> dB</p>

**Test Data (Below 1GHz):**  
**For 802.11b mode, channel 1 with data rate of 1Mbps:**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamplifier Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
<b>Horizontal</b>							
40.640	0.02	16.8	/	5.88	22.7	40.0	-17.3
265.920	0.15	12.9	/	30.55	43.6	46.0	-2.4
322.960	0.16	13.4	/	12.94	26.5	46.0	-19.5
432.000	0.20	15.8	/	12.40	28.4	46.0	-17.6
720.000	0.39	20.7	/	13.61	34.7	46.0	-11.3
799.840	0.39	22.2	/	14.31	36.9	46.0	-9.1
<b>Vertical</b>							
41.120	0.02	16.8	/	19.68	36.5	40.0	-3.5
265.920	0.15	12.9	/	18.55	31.6	46.0	-14.4
307.920	0.16	13.7	/	7.64	21.5	46.0	-24.5
531.280	0.30	18.1	/	10.00	28.4	46.0	-17.6
584.720	0.30	19.0	/	11.40	30.7	46.0	-15.3
648.000	0.36	20.0	/	10.54	30.9	46.0	-15.1

**Note:**

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. Other emission levels are too low against official limits that are not recorded.

**Test Data (Above 1GHz):  
802.11b mode/Low Channel: 2412MHz**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>								
1656.00	1.71	26.1	33.6	65.89	60.1	74	-13.9	V
1818.00	1.89	27.3	33	62.41	58.6	74	-15.4	V
7246.00	4.67	36.0	30.5	52.73	62.9	74	-11.1	V
7392.00	5.32	36.2	30.5	36.28	47.3	74	-26.7	V
8320.52	4.67	35.8	29.9	35.03	45.6	74	-28.4	V
7250.00	4.67	36.0	30.5	40.13	50.3	74	-23.7	V
1656.00	1.71	26.1	33.6	58.99	53.2	74	-20.8	H
1818.00	1.89	27.3	33	50.61	46.8	74	-27.2	H
7246.00	4.67	36.0	30.5	52.73	62.9	74	-11.1	H
4808.0	3.26	32.9	32.0	45.94	50.1	74	-23.9	H
3212.0	3.26	32.2	32.1	46.94	50.3	74	-23.7	H
1272.5	1.71	23.9	33.6	55.49	47.5	74	-26.5	H

<b>Frequency (MHz)</b>	<b>Cable Loss(dB)</b>	<b>Antenna Factor (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Reading Level (dBuV/m)</b>	<b>Emission Level (dBuV/m)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Polarization (H/V)</b>
<b>Average Measurement</b>								
1656.00	1.71	26.1	33.6	56.79	51.0	54	-3.0	V
1818.00	1.89	27.3	33	52.31	48.5	54	-5.5	V
7246.00	4.67	36.0	30.5	40.43	50.6	54	-3.4	V
7392.00	4.10	36.20	30.5	28.9	38.7	54	-15.3	V
6904.85	4.10	33.90	30.8	22.8	30.0	54	-24.0	V
5987.01	3.87	35.40	31.6	31.83	39.5	54	-14.5	V
1656.00	1.71	26.1	33.6	44.29	38.5	54	-15.5	H
1818.00	1.89	27.3	33	49.51	45.7	54	-8.3	H
7246.00	4.67	36.0	30.5	39.63	49.8	54	-4.2	H
1170.00	1.39	23.9	31.6	44.61	38.3	54	-15.7	H
5672.00	3.87	35.40	31.6	29.83	37.5	54	-16.5	H
4503.34	3.26	33.5	32.0	34.74	39.5	54	-14.5	H



**802.11b mode/Mid Channel: 2437MHz**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>								
1656.00	1.71	26.1	33.6	65.39	59.6	74	-14.4	V
1818.00	1.89	27.3	33	51.31	47.5	74	-26.5	V
7246.00	4.67	36.0	30.5	52.73	62.9	74	-11.1	V
1034.00	1.39	23.9	31.6	59.01	52.7	74	-21.3	V
5320.00	3.50	32.9	31.6	40.2	45.0	74	-29.0	V
4502.30	3.26	33.5	32.0	35.44	40.2	74	-33.8	V
1656.00	1.71	26.1	33.6	60.39	54.6	74	-19.4	H
1818.00	1.89	27.3	33	50.01	46.2	74	-27.8	H
7246.00	4.67	36.0	30.5	52.73	62.9	74	-11.1	H
1544.00	1.71	26.1	33.6	53.89	48.1	74	-25.9	H
5461.00	3.50	32.9	31.6	40.5	45.3	74	-28.7	H
6473.00	4.10	33.90	30.8	38.1	45.3	74	-28.7	H

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Average Measurement</b>								
1656.00	1.71	26.1	33.6	56.79	51.0	54	-3.0	V
1818.00	1.89	27.3	33	49.41	45.6	54	-8.4	V
7246.00	4.67	36.0	30.5	40.43	50.6	54	-3.4	V
4876.00	3.26	33.5	32.0	35.04	39.8	54	-14.2	V
3554.00	2.67	32.2	32.1	32.53	35.3	54	-18.7	V
1257.00	1.39	23.9	31.6	41.41	35.1	54	-18.9	V
1656.00	1.71	26.1	33.6	44.69	38.9	54	-15.1	H
1818.00	1.89	27.3	33	51.01	47.2	54	-6.8	H
7246.00	4.67	36.0	30.5	39.63	49.8	54	-4.2	H
2224.00	2.01	28.00	33.0	35.19	32.2	54	-21.8	H
3526.20	2.67	32.2	32.1	32.63	35.4	54	-18.6	H
6934.00	4.10	33.90	30.8	19.1	26.3	54	-27.7	H

**802.11b mode/High Channel: 2462MHz**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>								
1656.00	1.71	26.1	33.6	65.39	59.6	74	-14.4	V
1818.00	1.89	27.3	33	51.91	48.1	74	-25.9	V
7246.00	4.67	36.0	30.5	52.73	62.9	74	-11.1	V
7392.00	4.10	36.20	30.5	40.6	50.4	74	-23.6	V
5320.15	3.50	32.90	31.6	33.4	38.2	74	-35.8	V
6103.00	4.02	35.00	30.8	31.48	39.7	74	-34.3	V
1656.00	1.71	26.1	33.6	60.39	54.6	74	-19.4	H
1818.00	1.89	27.3	33	50.31	46.5	74	-27.5	H
7246.00	4.67	36.0	30.5	52.73	62.9	74	-11.1	H
7834.00	4.10	36.20	30.5	31.9	41.7	74	-32.3	H
6534.00	4.10	33.90	30.8	32.9	40.1	74	-33.9	H
5210.32	3.50	32.90	31.6	40.4	45.2	74	-28.8	H

<i>Frequency (MHz)</i>	<i>Cable Loss(dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Average Measurement</b>								
1656.00	1.71	26.1	33.6	57.09	51.3	54	-2.7	V
1818.00	1.89	27.3	33	51.61	47.8	54	-6.2	V
7246.00	4.67	36.0	30.5	40.43	50.6	54	-3.4	V
1170.00	1.39	23.9	31.60	40.91	34.6	54	-19.4	V
5220.00	3.50	32.9	31.60	35.3	40.1	54	-13.9	V
1232.00	1.39	23.9	31.60	41.81	35.5	54	-18.5	V
1656.00	1.71	26.1	33.6	44.69	38.9	54	-15.1	H
1818.00	1.89	27.3	33	52.01	48.2	54	-5.8	H
7246.00	4.67	36.0	30.5	39.63	49.8	54	-4.2	H
7392.00	4.10	36.20	30.50	19.3	29.1	54	-24.9	H
3550.00	2.67	32.20	32.10	29.33	32.1	54	-21.9	H
6230.00	4.02	35.00	30.80	21.88	30.1	54	-23.9	H

**For 802.11g mode/Low Channel: 2412MHz**

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Peak Measurement</b>								
1034.00	1.39	23.9	31.6	58.61	52.3	74	-21.7	V
3210.00	2.57	31.5	32.1	40.63	42.6	74	-31.4	V
1656.00	1.71	26.1	33.6	64.69	58.9	74	-15.1	V
1818.00	1.89	27.3	33	62.01	58.2	74	-15.8	V
4905.00	3.26	33.5	32.0	37.84	42.6	74	-31.4	V
1250.00	1.39	23.9	31.6	61.31	55.0	74	-19.0	V
7256.00	4.10	36.20	30.5	31.4	41.2	74	-32.8	H
4808.00	3.26	33.5	32.0	38.94	43.7	74	-30.3	H
3210.00	2.57	31.5	32.1	43.73	45.7	74	-28.3	H
1544.00	1.71	26.1	33.6	56.19	50.4	74	-23.6	H
3350.12	2.57	31.5	32.1	44.53	46.5	74	-27.5	H
6825.00	4.10	33.90	30.8	33	40.2	74	-33.8	H

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Average Measurement</b>								
4908.00	3.26	33.5	32.0	24.54	29.3	54	-24.7	V
1248.00	7.2	37.8	30.0	5.6	20.6	54	-33.4	V
1170.00	1.39	23.9	31.6	40.91	34.6	54	-19.4	V
1656.00	1.71	26.1	33.6	54.69	48.9	54	-5.1	V
1818.00	1.89	27.3	33	52.01	48.2	54	-5.8	V
1800.00	1.71	26.1	33.6	37.99	32.2	54	-21.8	V
4808.00	3.26	33.5	32.0	24.94	29.7	54	-24.3	H
3210.00	2.57	31.5	32.1	27.93	29.9	54	-24.1	H
1714.00	1.71	26.1	33.6	39.69	33.9	54	-20.1	H
7256.00	4.10	36.20	30.5	18.7	28.5	54	-25.5	H
1860.00	1.71	26.1	33.6	40.79	35.0	54	-19.0	H
7005.00	4.10	36.20	30.5	19.2	29.0	54	-25.0	H

**For 802.11g mode /Mid Channel: 2437MHz**

Frequency (MHz)	Cable Loss(dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>								
4876.00	3.26	33.5	32.0	36.34	41.1	74	-32.9	V
3006.00	2.57	31.5	32.1	39.93	41.9	74	-32.1	V
1034.00	1.39	23.9	31.6	58.81	52.5	74	-21.5	V
1656.00	1.71	26.1	33.6	64.49	58.7	74	-15.3	V
1818.00	1.89	27.3	33	62.01	58.2	74	-15.8	V
3260.00	2.57	31.5	32.1	40.03	42.0	74	-32.0	V
4876.00	3.26	33.5	32.0	38.04	42.8	74	-31.2	H
3244.00	2.57	31.5	32.1	43.13	45.1	74	-28.9	H
1544.00	1.71	26.1	33.6	56.69	50.9	74	-23.1	H
1656.00	1.71	26.1	33.6	64.69	58.9	74	-15.1	H
1818.00	1.89	27.3	33	62.01	58.2	74	-15.8	H
3500.00	2.67	32.2	32.1	43.23	46.0	74	-28.0	H

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Average Measurement</b>								
4876.00	3.26	33.5	32.0	22.84	27.6	54	-26.4	V
3006.00	2.57	31.5	32.1	27.73	29.7	54	-24.3	V
1170.00	1.39	23.9	31.6	42.11	35.8	54	-18.2	V
1656.00	1.71	26.1	33.6	54.49	48.7	54	-5.3	V
1818.00	1.89	27.3	33	52.71	48.9	54	-5.1	V
1260.00	1.39	23.9	31.6	41.81	35.50	54	-18.5	V
1656.00	1.71	26.1	33.6	44.69	38.9	54	-15.1	H
1818.00	1.89	27.3	33	52.01	48.2	54	-5.8	H
3278.00	2.57	31.5	32.1	27.73	29.7	54	-24.3	H
1068.00	1.39	23.9	31.6	39.71	33.4	54	-20.6	H
1170.50	1.39	23.9	31.6	41.81	35.5	54	-18.5	H
7620.00	4.10	36.00	30.5	19.7	29.3	54	-24.7	H



**For 802.11g mode /High Channel: 2462MHz**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Resding Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>								
4910.00	3.26	33.5	32.0	39.84	44.6	74	-29.4	V
3278.00	2.57	31.5	32.1	42.93	44.9	74	-29.1	V
1034.00	1.39	23.9	31.6	63.21	56.9	74	-17.1	V
1656.00	1.71	26.1	33.6	65.99	60.2	74	-13.8	V
1818.00	1.89	27.3	33	63.61	59.8	74	-14.2	V
3560.00	2.67	32.2	32.1	42.23	45.0	74	-29.0	V
1656.00	1.71	26.1	33.6	63.19	57.4	74	-16.6	H
1818.00	1.89	27.3	33	59.41	55.6	74	-18.4	H
3278.00	2.57	31.5	32.1	45.53	47.5	74	-26.5	H
1102.00	1.39	23.9	31.6	56.51	50.2	74	-23.8	H
1250.00	1.39	23.9	31.6	57.51	51.2	74	-22.8	H
3560.50	2.67	32.2	32.1	42.43	45.2	74	-28.8	H

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Average Measurement</b>								
1656.00	1.71	26.1	33.6	56.99	51.2	54	-2.8	V
1818.00	1.89	27.3	33	53.81	50.0	54	-4.0	V
3278.00	2.57	31.5	32.1	28.43	30.4	54	-23.6	V
1170.00	1.39	23.9	31.6	42.01	35.7	54	-18.3	V
3562.00	2.67	32.2	32.1	29.43	32.2	54	-21.8	V
4806.00	3.26	33.5	32.0	30.24	35.0	54	-19.0	V
1656.00	1.71	26.1	33.6	54.49	48.7	54	-5.3	H
1818.00	1.89	27.3	33	53.41	49.6	54	-4.4	H
3278.00	2.57	31.5	32.1	28.83	30.8	54	-23.2	H
1068.00	1.39	23.9	31.6	39.61	33.3	54	-20.7	H
1253.00	1.39	23.9	31.6	40.51	34.2	54	-19.8	H
7600.50	5.32	36.00	30.5	18.18	29.0	54	-25.0	H

**For 802.11n HT20 mode/Low Channel: 2412MHz**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>								
1656.00	1.71	26.1	33.6	65.89	60.1	74	-13.9	V
1818.00	1.89	27.3	33	66.11	62.3	74	-11.7	V
3380.00	2.57	31.5	32.1	39.83	41.8	74	-32.2	V
1306.00	1.39	23.9	31.6	60.71	54.4	74	-19.6	V
1520.00	1.71	26.1	33.6	61.29	55.5	74	-18.5	V
4900.00	3.26	33.5	32.0	41.24	46.0	74	-28.0	V
1656.00	1.71	26.1	33.6	64.49	58.7	74	-15.3	H
1818.00	1.89	27.3	33	63.41	59.6	74	-14.4	H
3210.00	2.57	31.5	32.1	42.83	44.8	74	-29.2	H
1544.00	1.71	26.1	33.6	57.49	51.7	74	-22.3	H
3350.20	2.57	31.5	32.1	43.23	45.2	74	-28.8	H
7520.00	5.32	36.00	30.5	31.68	42.5	74	-31.5	H

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarizat ion (H/V)</i>
<b>Average Measurement</b>								
1656.00	1.71	26.1	33.6	55.49	49.7	54	-4.3	V
1818.00	1.89	27.3	33	53.91	50.1	54	-3.9	V
1170.00	1.39	23.9	31.6	41.71	35.4	54	-18.6	V
4808.00	3.26	33.5	32.0	26.14	30.9	54	-23.1	V
4940.50	3.26	33.5	32.0	27.74	32.5	54	-21.5	V
1250.00	1.39	23.9	31.6	42.51	36.2	54	-17.8	V
1656.00	1.71	26.1	33.6	52.29	46.5	54	-7.5	H
1818.00	1.89	27.3	33	47.01	43.2	54	-10.8	H
1306.00	1.39	23.9	31.6	40.21	33.9	54	-20.1	H
7222.00	4.10	36.00	30.5	18.7	28.3	54	-25.7	H
7534.00	5.32	36.00	30.5	18.38	29.2	54	-24.8	H
3500.20	2.67	32.2	32.1	27.73	30.5	54	-23.5	H

**For 802.11n HT20 mode/Mid Channel: 2437MHz**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>								
1656.00	1.71	26.1	33.6	64.69	58.9	74	-15.1	V
1818.00	1.89	27.3	33	62.01	58.2	74	-15.8	V
1034.00	1.39	23.9	31.6	63.51	57.2	74	-16.8	V
8140.00	4.67	35.8	29.9	31.03	41.6	74	-32.4	V
8250.00	4.67	35.8	29.9	31.93	42.5	74	-31.5	V
1259.00	1.39	23.9	31.6	64.31	58.0	74	-16.0	V
1656.00	1.71	26.1	33.6	64.69	58.9	74	-15.1	H
1818.00	1.89	27.3	33	62.51	58.7	74	-15.3	H
3346.00	2.57	31.5	32.1	40.63	42.6	74	-31.4	H
1306.00	1.39	23.9	31.6	56.11	49.8	74	-24.2	H
1450.00	1.39	23.9	31.6	54.81	48.5	74	-25.5	H
4874.00	3.26	33.5	32.0	40.44	45.2	74	-28.8	H

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Average Measurement</b>								
1656.00	1.71	26.1	33.6	54.09	48.3	54	-5.7	V
1818.00	1.89	27.3	33	53.51	49.7	54	-4.3	V
1034.00	1.39	23.9	31.6	43.61	37.3	54	-16.7	V
8140.00	4.67	35.8	29.9	17.83	28.4	54	-25.6	V
8200.00	4.67	35.8	29.9	18.43	29.0	54	-25.0	V
1400.50	1.39	23.9	31.6	44.81	38.5	54	-15.5	V
1656.00	1.71	26.1	33.6	53.09	47.3	54	-6.7	H
1818.00	1.89	27.3	33	46.41	42.6	54	-11.4	H
3244.00	2.57	31.5	32.1	27.73	29.7	54	-24.3	H
1170.00	1.39	23.9	31.6	39.71	33.4	54	-20.6	H
1252.00	1.39	23.9	31.6	40.51	34.2	54	-19.8	H
4900.00	3.26	33.5	32.0	23.24	28.0	54	-26.0	H

**For 802.11n HT20 mode/High Channel: 2462MHz**

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Peak Measurement</b>								
1656.00	1.71	26.1	33.6	65.99	60.2	74	-13.8	V
1818.00	1.89	27.3	33	63.51	59.7	74	-14.3	V
1034.00	1.39	23.9	31.6	64.81	58.5	74	-15.5	V
4876.00	3.26	33.5	32.0	36.04	40.8	74	-33.2	V
3310.00	2.57	31.5	32.1	40.23	42.2	74	-31.8	V
1350.00	1.39	23.9	31.6	61.81	55.5	74	-18.5	V
1656.00	1.71	26.1	33.6	65.59	59.8	74	-14.2	H
1818.00	1.89	27.3	33	60.11	56.3	74	-17.7	H
3278.00	2.57	31.5	32.1	44.13	46.1	74	-27.9	H
1544.00	1.71	26.1	33.6	56.49	50.7	74	-23.3	H
1600.00	1.71	26.1	33.6	56.99	51.2	74	-22.8	H
3530.00	2.67	32.2	32.1	44.23	47.0	74	-27.0	H

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Average Measurement</b>								
1656.00	1.71	26.1	33.6	54.29	48.5	54	-5.5	V
1818.00	1.89	27.3	33	52.11	48.3	54	-5.7	V
3278.00	2.57	31.5	32.1	27.93	29.9	54	-24.1	V
1170.00	1.39	23.9	31.6	42.81	36.5	54	-17.5	V
1250.00	1.39	23.9	31.6	41.51	35.2	54	-18.8	V
3500.50	2.67	32.2	32.1	27.43	30.2	54	-23.8	V
1656.00	1.71	26.1	33.6	53.39	47.6	54	-6.4	H
1818.00	1.89	27.3	33	53.71	49.9	54	-4.1	H
1170.00	1.39	23.9	31.6	39.61	33.3	54	-20.7	H
4910.00	3.26	33.5	32.0	22.94	27.7	54	-26.3	H
1250.00	1.39	23.9	31.6	40.51	34.2	54	-19.8	H
7520.00	5.32	36.00	30.5	18.18	29.0	54	-25.0	H



**For 802.11n HT40 Mode/Low Channel: 2422MHz**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>								
1656.00	1.71	26.1	33.6	64.99	59.2	74	-14.8	V
1818.00	1.89	27.3	33	63.51	59.7	74	-14.3	V
3006.00	2.57	31.5	32.1	40.13	42.1	74	-31.9	V
1034.00	1.39	23.9	31.6	63.41	57.1	74	-16.9	V
1200.00	1.39	23.9	31.6	64.51	58.2	74	-15.8	V
3150.00	2.57	31.5	32.1	41.03	43.0	74	-31.0	V
1656.00	1.71	26.1	33.6	65.89	60.1	74	-13.9	H
1818.00	1.89	27.3	33	63.51	59.7	74	-14.3	H
3210.00	2.57	31.5	32.1	42.83	44.8	74	-29.2	H
2224.00	2.01	28.0	33.0	53.69	50.7	74	-23.3	H
4920.00	3.26	33.5	32.0	40.24	45.0	74	-29.0	H
3250.00	2.57	31.5	32.1	43.03	45.0	74	-29.0	H

<b>Frequency (MHz)</b>	<b>Cable Loss (dB)</b>	<b>Antenna Factor (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Reading Level (dBuV/m)</b>	<b>Emission Level (dBuV/m)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Polarization (H/V)</b>
<b>Average Measurement</b>								
1656.00	1.71	26.1	33.6	55.99	50.2	54	-3.8	V
1818.00	1.89	27.3	33	53.61	49.8	54	-4.2	V
3006.00	2.57	31.5	32.1	27.53	29.5	54	-24.5	V
1034.00	1.39	23.9	31.6	44.01	37.7	54	-16.3	V
1150.00	1.39	23.9	31.6	44.31	38.0	54	-16.0	V
4820.50	3.26	33.5	32.0	16.24	21.0	54	-33.0	V
1656.00	1.71	26.1	33.6	55.49	49.7	54	-4.3	H
1818.00	1.89	27.3	33	50.91	47.1	54	-6.9	H
1442.00	1.39	23.9	31.6	40.21	33.9	54	-20.1	H
3210.00	2.57	31.5	32.1	27.73	29.7	54	-24.3	H
3500.20	2.67	32.2	32.1	25.83	28.6	54	-25.4	H
4900.00	3.26	33.5	32.0	16.24	21.0	54	-33.0	H

**For 802.11n HT40 mode/Mid Channel: 2437MHz**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>								
4842.00	3.26	33.5	32.0	36.14	40.9	74	-33.1	V
1544.00	1.71	26.1	33.6	57.09	51.3	74	-22.7	V
1306.00	1.39	23.9	31.6	58.41	52.1	74	-21.9	V
7120.00	4.10	36.00	30.5	32.2	41.8	74	-32.2	V
1250.50	1.39	23.9	31.6	57.41	51.1	74	-22.9	V
1620.00	1.71	26.1	33.6	57.79	52.0	74	-22.0	V
8106.00	1.47	35.8	29.9	34.83	42.2	74	-31.8	H
4060.00	3.26	33.5	32.0	37.64	42.4	74	-31.6	H
3244.00	2.57	31.5	32.1	42.93	44.9	74	-29.1	H
1204.00	1.39	23.9	31.6	56.81	50.5	74	-23.5	H
1305.00	1.39	23.9	31.6	55.31	49.0	74	-25.0	H
3520.00	2.67	32.2	32.1	42.23	45.0	74	-29.0	H

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Average Measurement</b>								
7902.00	5.32	36.00	30.5	17.78	28.6	54	-25.4	V
4876.00	3.26	33.5	32.0	15.84	20.6	54	-33.4	V
1034.00	1.39	23.9	31.6	42.01	35.7	54	-18.3	V
1157.50	1.39	23.9	31.6	40.61	34.3	54	-19.7	V
1150.00	1.39	23.9	31.6	42.51	36.2	54	-17.8	V
4700.00	3.26	33.5	32.0	17.24	22.0	54	-32.0	V
7426.00	4.10	36.00	30.5	19.1	28.7	54	-25.3	H
4876.00	3.26	33.5	32.0	15.54	20.3	54	-33.7	H
3244.00	2.57	31.5	32.1	27.83	29.8	54	-24.2	H
1306.00	1.39	23.9	31.6	41.81	35.5	54	-18.5	H
1250.00	1.39	23.9	31.6	40.51	34.2	54	-19.8	H
4650.00	3.26	33.5	32.0	17.74	22.5	54	-31.5	H

**For 802.11n HT40 Mode/High Channel: 2452MHz**

<i>Frequency (MHz)</i>	<i>Cable Loss (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Preamp Factor (dB)</i>	<i>Reading Level (dBuV/m)</i>	<i>Emission Level (dBuV/m)</i>	<i>Limit (dBuV/m)</i>	<i>Margin (dB)</i>	<i>Antenna Polarization (H/V)</i>
<b>Peak Measurement</b>								
7732.00	5.32	36.00	30.5	30.88	41.7	74	-32.3	V
4774.00	3.26	33.5	32.0	35.94	40.7	74	-33.3	V
1531.50	1.71	26.1	33.6	58.09	52.3	74	-21.7	V
1034.00	1.39	23.9	31.6	61.01	54.7	74	-19.3	V
1200.50	1.39	23.9	31.6	61.31	55.0	74	-19.0	V
7800.50	5.32	36.00	30.5	31.18	42.0	74	-32.0	V
4604.00	3.26	33.5	32.0	36.74	41.5	74	-32.5	H
3244.00	2.57	31.5	32.1	44.93	46.9	74	-27.1	H
1544.00	1.71	26.1	33.6	56.49	50.7	74	-23.3	H
7426.00	4.10	36.00	30.5	31.8	41.4	74	-32.6	H
1600.20	1.71	26.1	33.6	57.79	52.0	74	-22.0	H
4500.50	3.26	33.5	32.0	37.24	42.0	74	-32.0	H

Frequency (MHz)	Cable Loss(dB)	Antenna Factor (dB)	Preamplifier Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
<b>Average Measurement</b>								
7732.00	5.32	36.00	30.5	17.38	28.2	54	-25.8	V
4774.00	3.26	33.5	32.0	22.84	27.6	54	-26.4	V
1225.50	1.39	23.9	31.6	40.21	33.9	54	-20.1	V
1034.00	1.71	26.1	31.6	38.89	35.1	54	-18.9	V
1150.00	1.39	23.9	31.6	42.31	36.0	54	-18.0	V
1300.50	1.39	23.9	31.6	40.81	34.5	54	-19.5	V
7426.00	4.10	36.00	30.5	19.1	28.7	54	-25.3	H
3244.00	2.57	31.5	32.1	27.93	29.9	54	-24.1	H
1306.00	1.39	23.9	31.6	39.51	33.2	54	-20.8	H
4570.00	3.26	33.5	32.0	23.14	27.9	54	-26.1	H
1505.00	1.71	26.1	33.6	40.99	35.2	54	-18.8	H
3520.00	2.67	32.2	32.1	25.03	27.8	54	-26.2	H

**Note:**

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.
3. As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
4. The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

**§15.205(a) Requirement:**

*(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:*

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

**Conclusions:**

*The fundamental is not in a restricted band, and spurious emission in the restricted bands comply with the general emission limits of 15.209.*

## ATTACHMENT 4 – OCCUPIED BANDWIDTH TEST

<b>CLIENT:</b>	GRANDSTREAM NETWORKS,INC.	<b>TEST STANDERD:</b>	Section 15.247(a)								
<b>MODEL NUMBERS:</b>	GXV3175	<b>PRODUCT:</b>	IP Multimedia Phone								
<b>EUT MODEL:</b>	GXV3175	<b>EUT DESIGNATION:</b>	Digitall Transmission Device								
<b>TEMPERATURE:</b>	23°C	<b>HUMIDITY:</b>	47%RH								
<b>ATM PRESSURE:</b>	101.0kPa	<b>GROUNDING:</b>	None								
<b>TESTED BY:</b>	Daomen	<b>DATE OF TEST:</b>	August 27 <sup>th</sup> , 2012								
<b>TEST REFERENCE:</b>	ANSI C63.10:2009 and 558074 D01										
<b>TEST PROCEDURE:</b>	The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB. Analyzer and the attached plot were taken. The EUT was set up to ANSI C63.10:2009, tested to DTS test procedure of 558074 D01 for compliance with FCC 47CFR 15.247 requirements.										
<b>DESCRIPTIONS OF TEST MODE:</b>	<p>Pre-Scan has been conducted to determine the worst-case mode from all possible Combinations between available modulations,data rates and antenna ports (if EUT with antenna diversity architecture).</p> <p>Following channels were selected for the final test as listed below:</p> <p>802.11b mode with data rate of 1Mbps, 802.11g mode with data rate of 6Mbps, 802.11n HT20 mode with data rate of 6.5Mbps and 802.11n HT40 mode with data rate of 13.5Mbps.</p>										
<b>EQUIPMENT SETUP</b>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Equipment Mode</th> <th style="width: 50%;">Spectrum Analyzer</th> </tr> </thead> <tbody> <tr> <td>Detector Function</td> <td>Peak</td> </tr> <tr> <td>RBW</td> <td>100KHz</td> </tr> <tr> <td>VBW</td> <td>300KHz</td> </tr> </tbody> </table>			Equipment Mode	Spectrum Analyzer	Detector Function	Peak	RBW	100KHz	VBW	300KHz
Equipment Mode	Spectrum Analyzer										
Detector Function	Peak										
RBW	100KHz										
VBW	300KHz										
<b>TEST VOLTAGE:</b>	120VAC/60Hz										
<b>RESULTS:</b>	The EUT meet the requirements of test reference for occupied bandwidth.The test results relate only to the equipment under test provided by client.										
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.										
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp $\pm 2.1$ dB										



**Occupied Bandwidth Test Data:**

**For 802.11b Mode:**

<b>Channel Frequency (MHz)</b>	<b>6dB Bandwidth (MHz)</b>	<b>Minimum Limit (MHz)</b>	<b>Pass/Fail</b>
2412	12.06	0.5	Pass
2437	12.00	0.5	Pass
2462	12.18	0.5	Pass

**For 802.11g Mode:**

<b>Channel Frequency (MHz)</b>	<b>6dB Bandwidth (MHz)</b>	<b>Minimum Limit (MHz)</b>	<b>Pass/Fail</b>
2412	16.44	0.5	Pass
2437	16.44	0.5	Pass
2462	16.50	0.5	Pass


**For 802.11n HT20 Mode:**

<b>Channel Frequency (MHz)</b>	<b>6dB Bandwidth (MHz)</b>	<b>Minimum Limit (MHz)</b>	<b>Pass/Fail</b>
2412	17.70	0.5	Pass
2437	17.52	0.5	Pass
2462	17.34	0.5	Pass


**For 802.11n HT40 Mode:**

<b>Channel Frequency (MHz)</b>	<b>6dB Bandwidth (MHz)</b>	<b>Minimum Limit (MHz)</b>	<b>Pass/Fail</b>
2422	35.88	0.5	Pass
2437	36.12	0.5	Pass
2452	36.24	0.5	Pass


**For 802.11b Mode:**

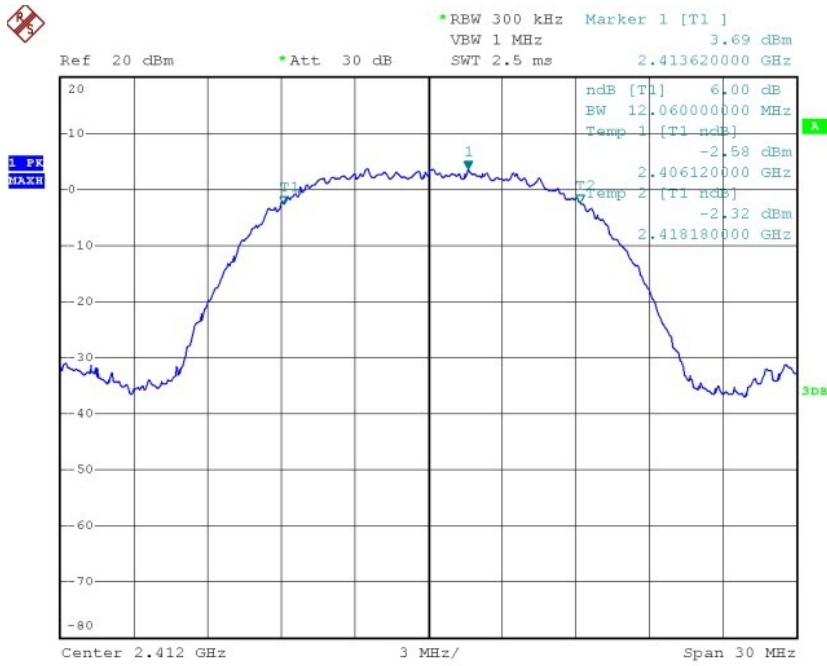

**Low Channel: 2412MHz**

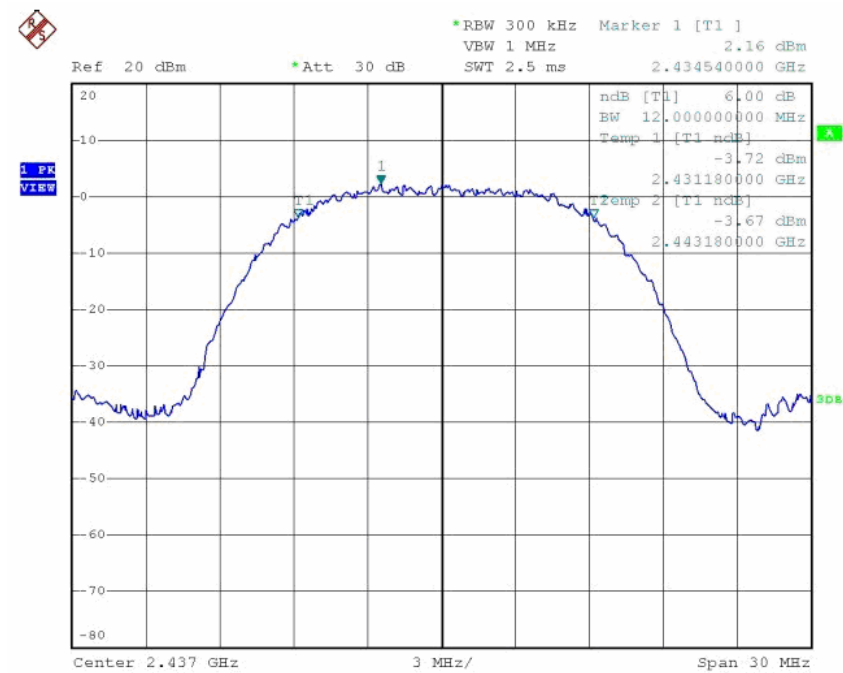


**Mid Channel: 2437MHz**

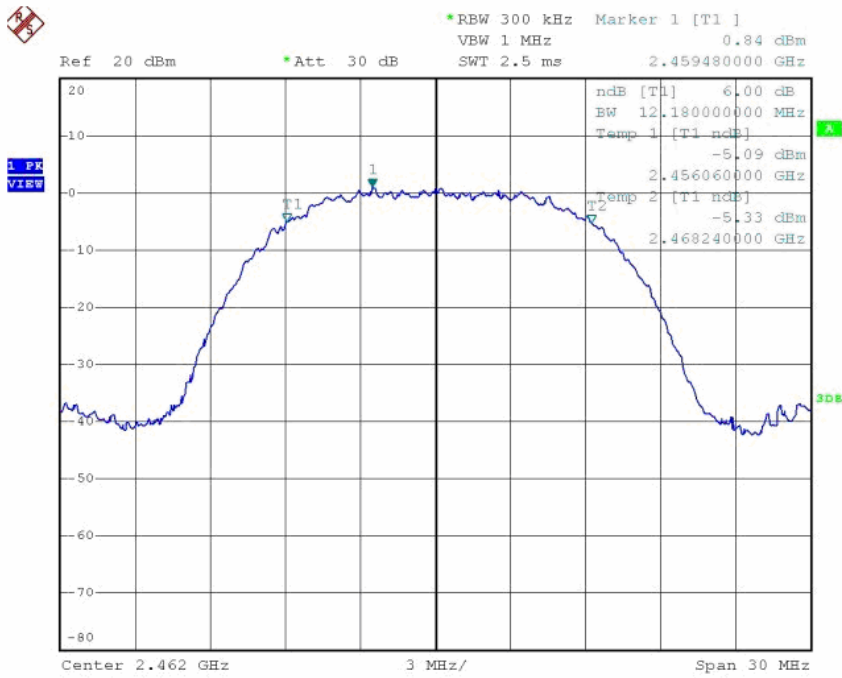


**High Channel: 2462MHz**


**For 802.11g Mode:**

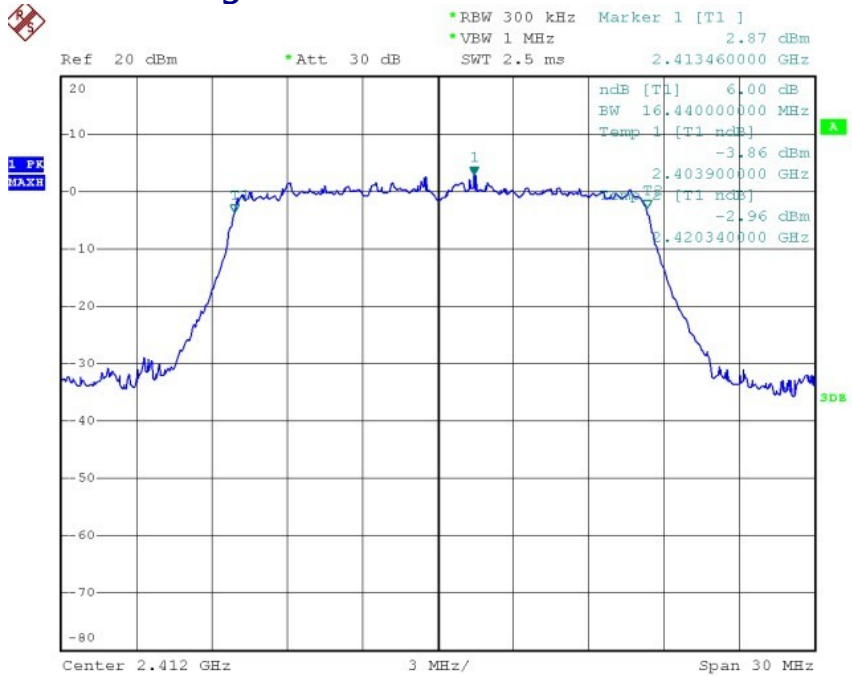

**Low Channel: 2412MHz**

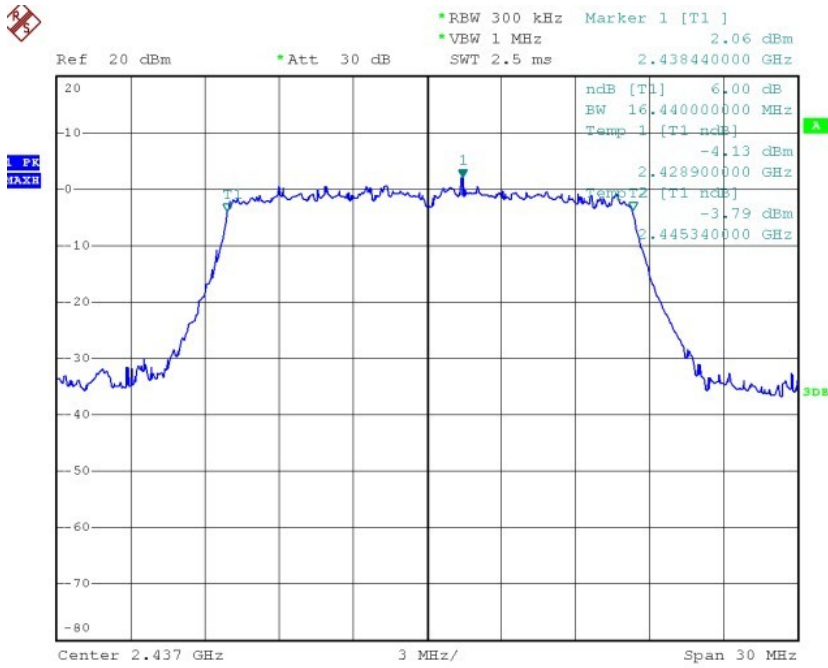


**Mid Channel: 2437MHz**

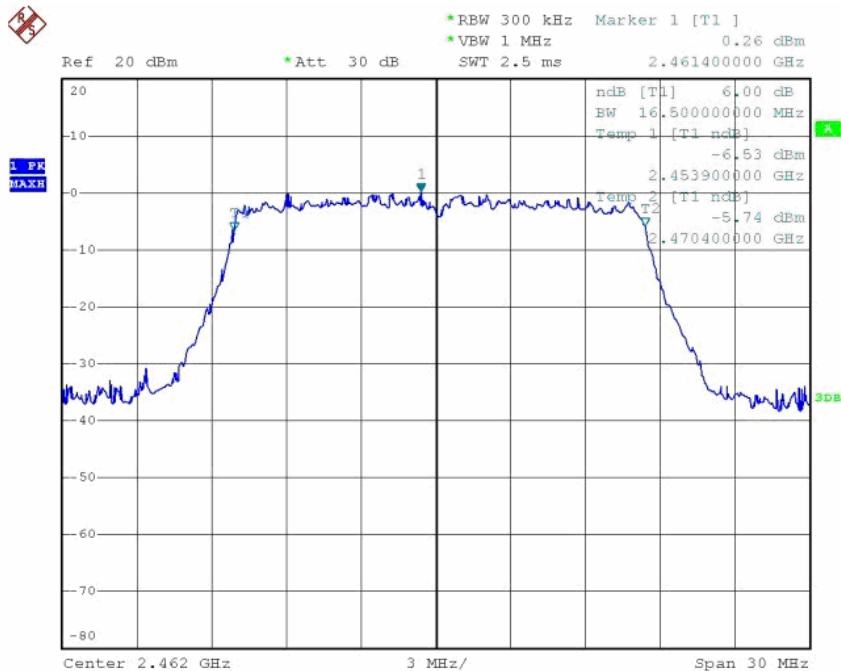


**High Channel: 2462MHz**


**For 802.11n HT20 Mode:**

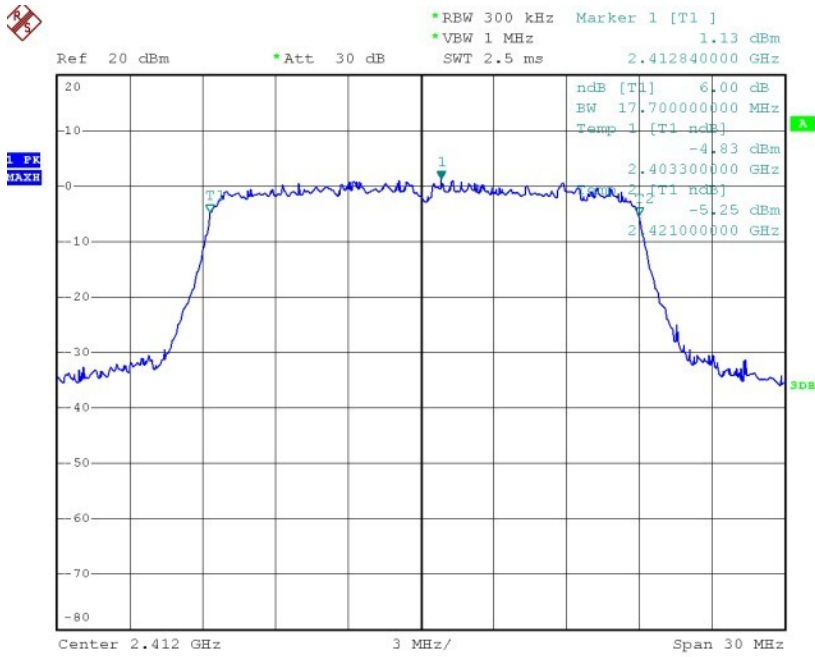

**Low Channel: 2412MHz**

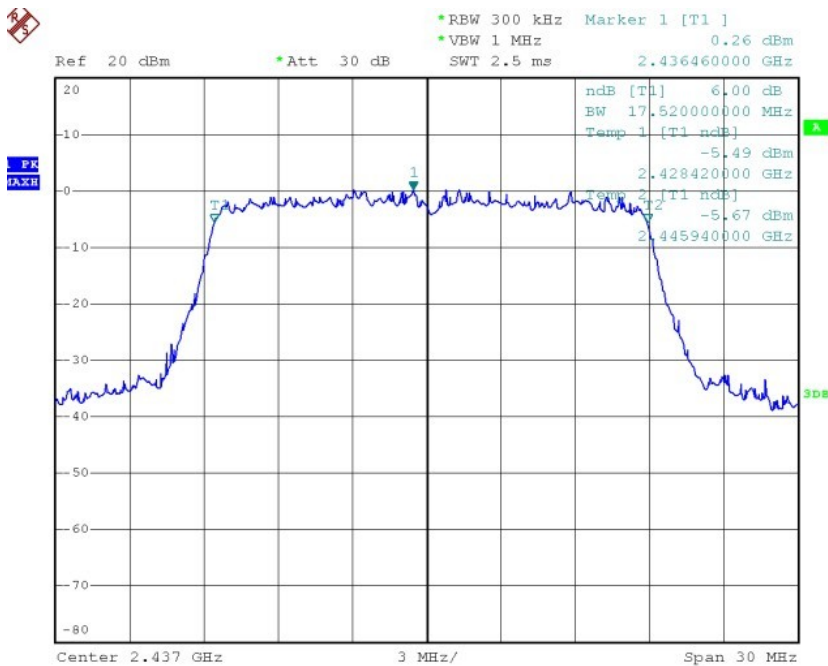


**Mid Channel: 2437MHz**

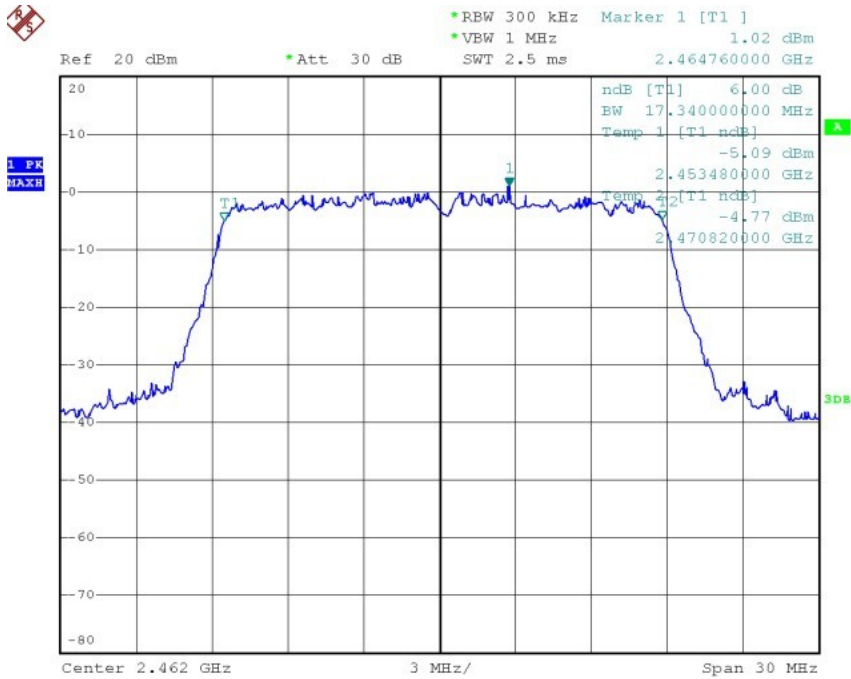


**High Channel: 2462MHz**


**For 802.11n HT40 Mode:**

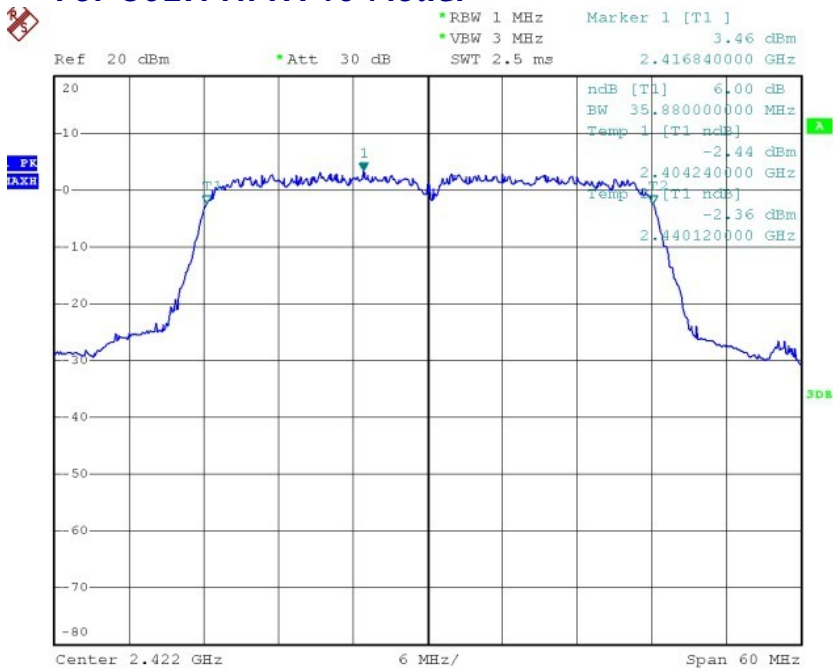

**Low Channel: 2422MHz**

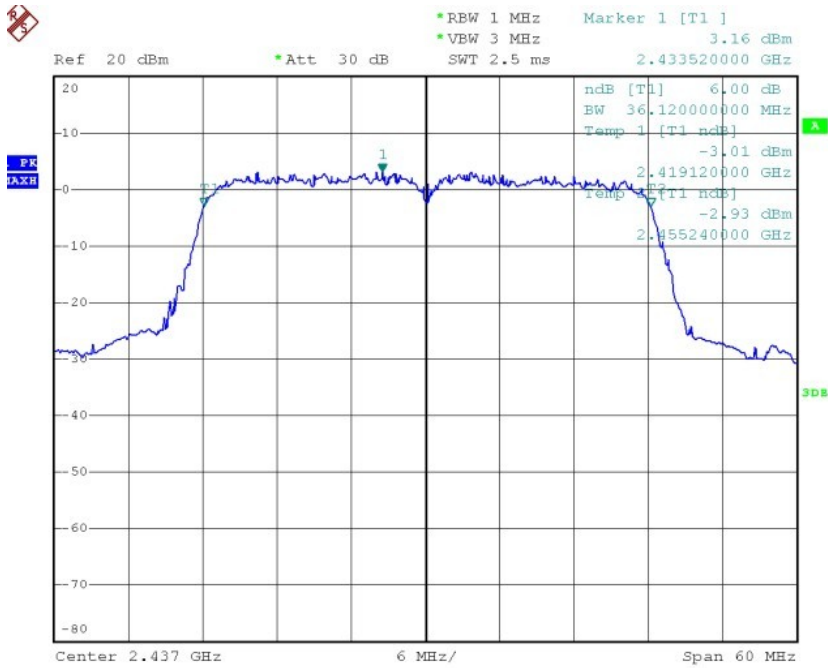

**Mid Channel: 2437MHz**

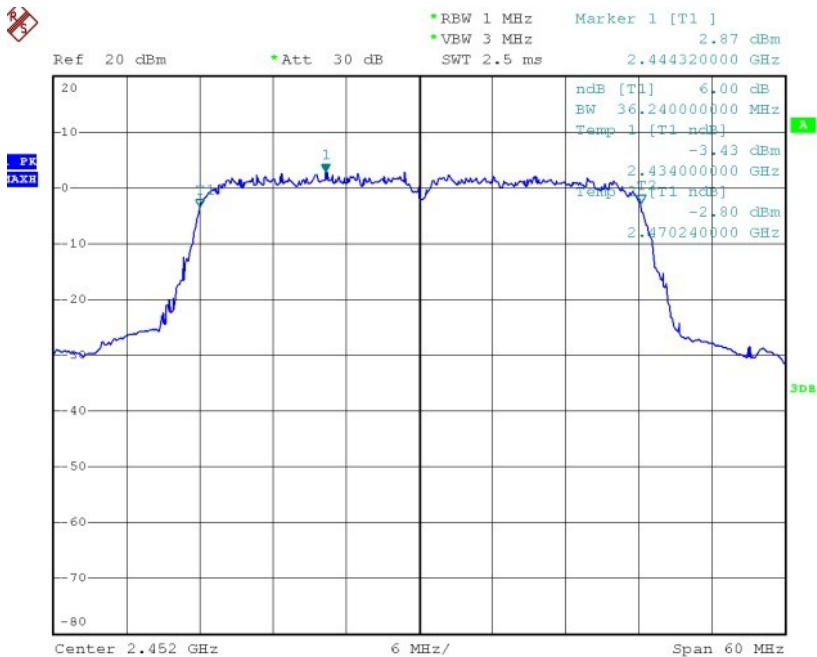

**High Channel: 2452MHz**

## ATTACHMENT 5- MAXIMUM PEAK OUTPUT POWER

<b>CLIENT:</b>	GRANDSTREAM NETWORKS,INC.	<b>TEST STANDERD:</b>	Section 15.247(b)
<b>MODEL NUMBERS:</b>	GXV3175	<b>PRODUCT:</b>	IP Multimedia Phone
<b>EUT MODEL:</b>	GXV3175	<b>EUT DESIGNATION:</b>	Digital Transmission Device
<b>TEMPERATURE:</b>	23°C	<b>HUMIDITY:</b>	47%RH
<b>ATM PRESSURE:</b>	101.0kPa	<b>GROUNDING:</b>	None
<b>TESTED BY:</b>	Daomen	<b>DATE OF TEST:</b>	August 24 <sup>th</sup> , 2012
<b>TEST REFERENCE:</b>	ANSI C63.10:2009 and 558074 D01		
<b>TEST PROCEDURE:</b>	The EUT was set-up as ANSI C63.10:2009, tested to DTS test procedure of 558074 D01 for compliance to FCC 47CFR 15.247 requirements.		
<b>DESCRIPTIONS OF TEST MODE:</b>	<p>Pre-Scan has been conducted to determine the worst-case mode from all possible Combinations between available modulations,data rates and antenna ports (if EUT with antenna diversity architecture). Following channels were selected for the final test as listed below:</p> <p>802.11b mode with data rate of 1Mbps, 802.11g mode with data rate of 6Mbps, 802.11n HT20 mode with data rate of 6.5Mbps and 802.11n HT40 mode with data rate of 13.5Mbps.</p>		
<b>MEASUREMENT EQUIPMENT SET</b>	Spectrum analyzer was set as below:		
	Equipment Mode	Spectrum Analyzer	
	Detector Function	Peak	
	RBW	1MHz	
	VBW	1MHz	
<b>TESTED RANGE:</b>	N/A		
<b>TEST VOLTAGE:</b>	120VAC/60Hz		
<b>RESULTS:</b>	The EUT meet the requirements of test reference for maximum peak output power.the worst-case mode is 802.11b mode with data rate 1Mbps in channel Low.The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp $\pm 2.1$ dB.		



**Maximum Peak Output Power Test Data:**

**For 802.11b Mode:**

<b>Channel Frequency (MHz)</b>	<b>Peak Output Power(dBm)</b>	<b>Cable Loss (Db)</b>	<b>Power Level (dBm)</b>	<b>Limit</b>	<b>Margin</b>
2412	17.47	2.00	19.47	30.00	-10.53
2437	17.07	2.00	19.07	30.00	-10.93
2462	16.29	2.00	18.29	30.00	-11.71

**For 802.11g Mode:**

<b>Channel Frequency (MHz)</b>	<b>Peak Output Power(dBm)</b>	<b>Cable Loss (Db)</b>	<b>Power Level (dBm)</b>	<b>Limit</b>	<b>Margin</b>
2412	17.31	2.00	19.31	30.00	-10.69
2437	17.03	2.00	19.03	30.00	-10.97
2462	16.87	2.00	18.87	30.00	-11.13

**For 802.11n HT20 Mode:**

<b>Channel Frequency (MHz)</b>	<b>Peak Output Power(dBm)</b>	<b>Cable Loss (Db)</b>	<b>Power Level (dBm)</b>	<b>Limit</b>	<b>Margin</b>
2412	17.16	2.00	19.16	30.00	-10.84
2437	16.64	2.00	18.64	30.00	-11.36
2462	16.71	2.00	18.71	30.00	-11.29


**For 802.11n HT40 Mode:**

<b>Channel Frequency (MHz)</b>	<b>Peak Output Power(dBm)</b>	<b>Cable Loss (Db)</b>	<b>Power Level (dBm)</b>	<b>Limit</b>	<b>Margin</b>
2422	16.82	2.00	18.82	30.00	-11.18
2437	16.64	2.00	18.64	30.00	-11.36
2452	16.58	2.00	18.58	30.00	-11.42

**For 802.11b Mode:**



**Low Channel: 2412MHz**

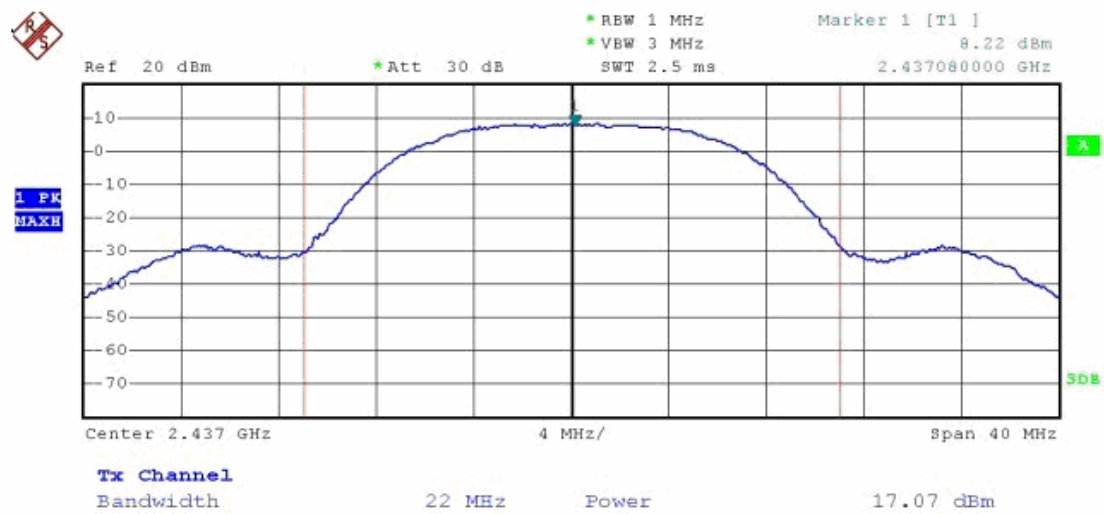


**Mid Channel: 2437MHz**



**High Channel: 2462MHz**

**For 802.11g Mode:**

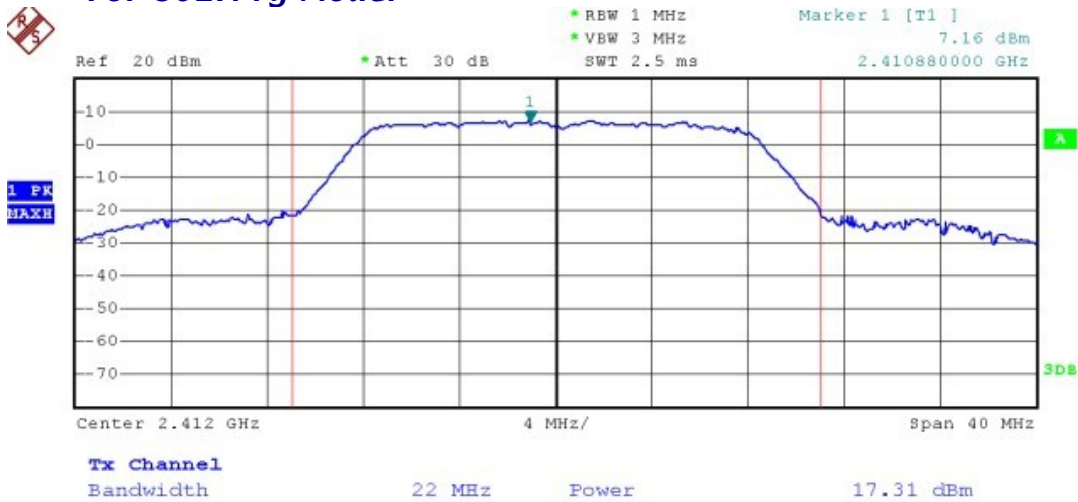

**Low Channel: 2412MHz**




**Mid Channel: 2437MHz**



**High Channel: 2462MHz**

**For 802.11n HT20 Mode:**

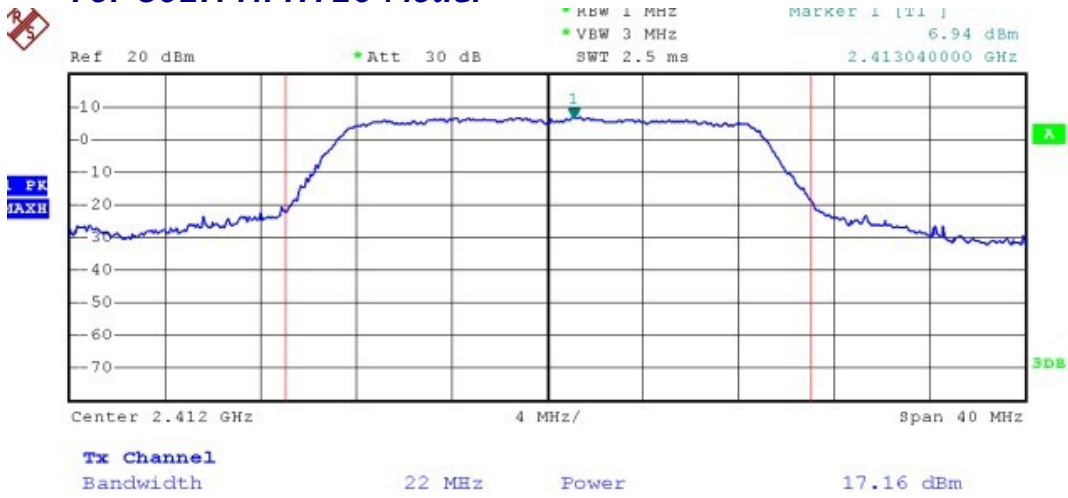

**Low Channel: 2412MHz**




**Mid Channel: 2437MHz**




**High Channel: 2462MHz**


**For 802.11n HT40 Mode:**

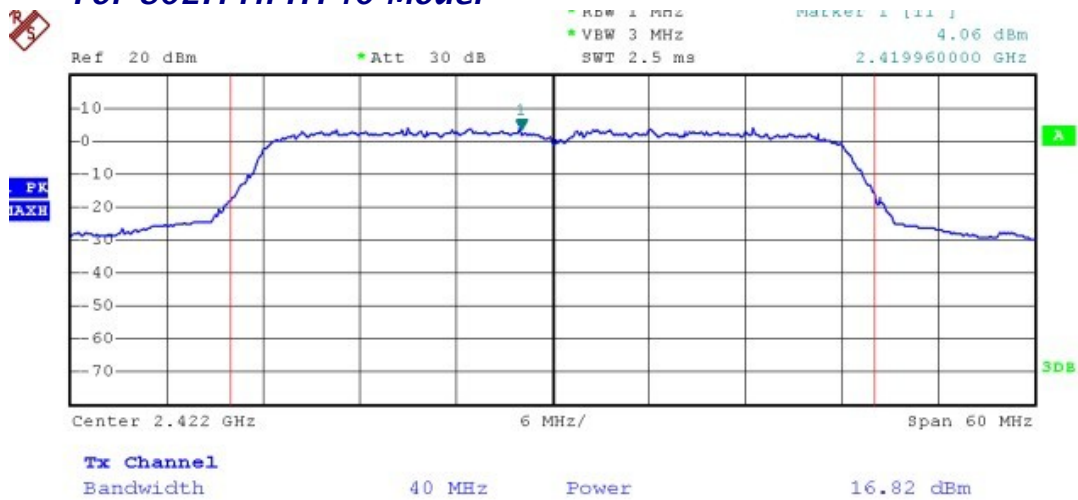

**Low Channel: 2422MHz**

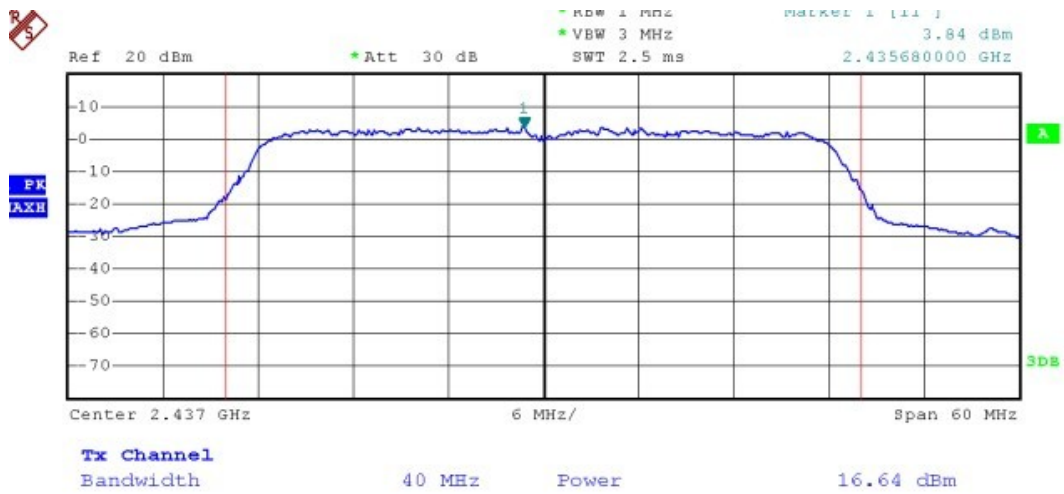

**Mid Channel: 2437MHz**

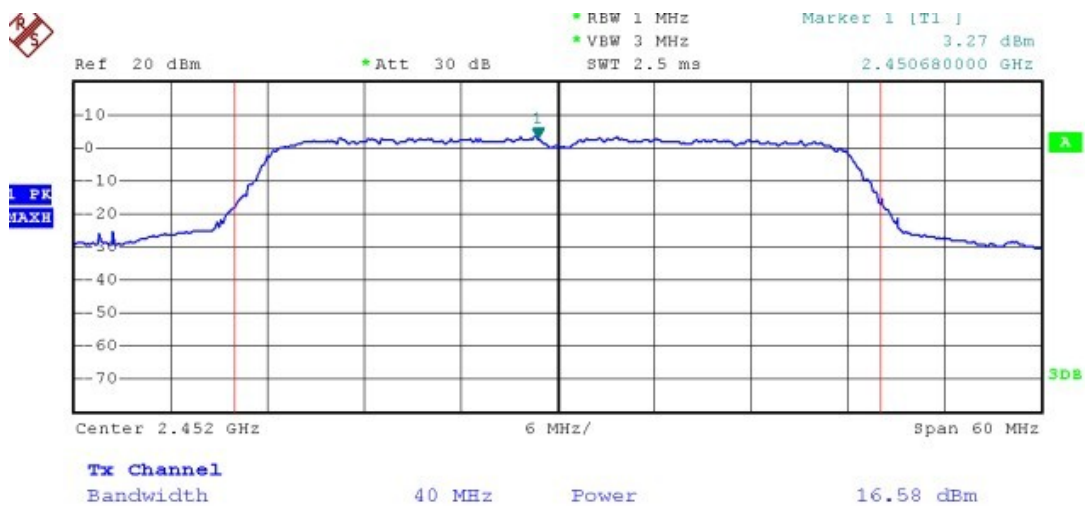

**High Channel: 2452MHz**


## ATTACHMENT 6 – BAND EDGES TEST

<b>CLIENT:</b>	GRANDSTREAM NETWORKS,INC.	<b>TEST STANDERD:</b>	Section 15.247(d)								
<b>MODEL NUMBERS:</b>	GXV3175	<b>PRODUCT:</b>	IP Multimedia Phone								
<b>EUT MODEL:</b>	GXV3175	<b>EUT DESIGNATION:</b>	Digital Transmission Device								
<b>TEMPERATURE:</b>	23°C	<b>HUMIDITY:</b>	47%RH								
<b>ATM PRESSURE:</b>	101.0kPa	<b>GROUNDING:</b>	None								
<b>TESTED BY:</b>	Daomen	<b>DATE OF TEST:</b>	August 27 <sup>th</sup> , 2012								
<b>TEST REFERENCE:</b>	ANSI C63.10:2009 and 558074 D01										
<b>TEST PROCEDURE:</b>	<p><b>Requirement:</b> 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.</p> <p><b>Test Procedures:</b> The EUT was set -up as ANSI C63.10:2009, tested to DTS test procedure of 558074 D01 for compliance to FCC 47CFR 15.247 requirements.</p>										
<b>DESCRIPTIONS OF TEST MODE:</b>	Pre-Scan has been conducted to determine the worst-case mode from all possible Combinations between available modulations,data rates and antenna ports (if EUT with antenna diversity architecture). Following channels were chosen for the final test as listed below: 802.11b mode with data rate of 1Mbps, 802.11g mode with data rate of 6Mbps,802.11n HT20 mode with data rate of 6.5Mbps and 802.11n HT40 mode with data rate of 13.5Mbps.										
<b>EQUIPMENT SETUP</b>	<p>Spectrum analyzer shall be set as below:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Equipment Mode</th> <th style="width: 50%;">Spectrum Analyzer</th> </tr> </thead> <tbody> <tr> <td>Detector Function</td> <td>Peak Mode</td> </tr> <tr> <td>RBW</td> <td>100KHz</td> </tr> <tr> <td>VBW</td> <td>300KHz</td> </tr> </tbody> </table>			Equipment Mode	Spectrum Analyzer	Detector Function	Peak Mode	RBW	100KHz	VBW	300KHz
Equipment Mode	Spectrum Analyzer										
Detector Function	Peak Mode										
RBW	100KHz										
VBW	300KHz										
<b>TEST VOLTAGE:</b>	120VAC/60Hz										
<b>RESULTS:</b>	The EUT meet the requirements of test reference for band edges.The test results relate only to the equipment under test provided by client.										
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.										
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp $\pm 2.1$ dB.										




For 802.11b Mode:


### Conducted Band Edge Test Plot: 2412MHz

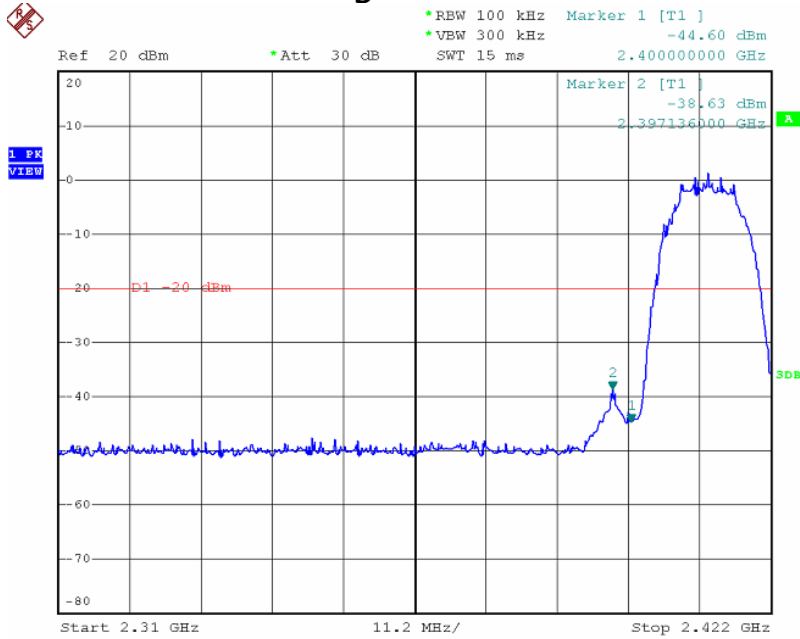


### Conducted Band Edge Test Plot: 2462MHz

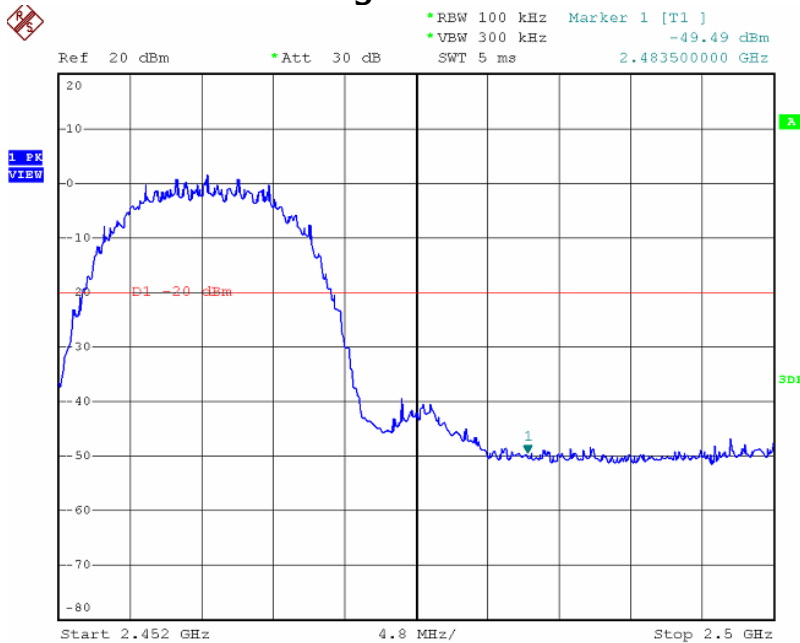


### Radiated Band Edge Test Plot: 2412MHz

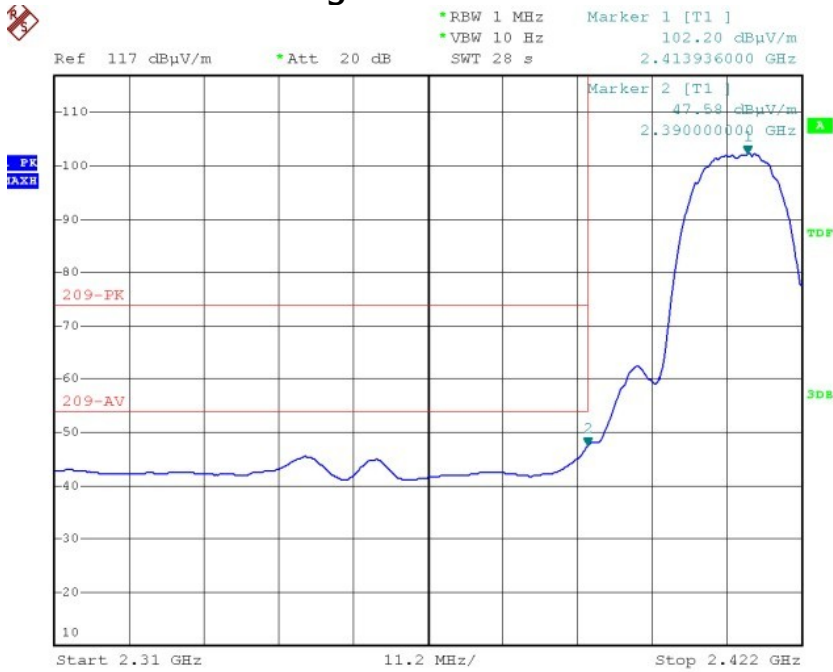


### Horizontal-Average

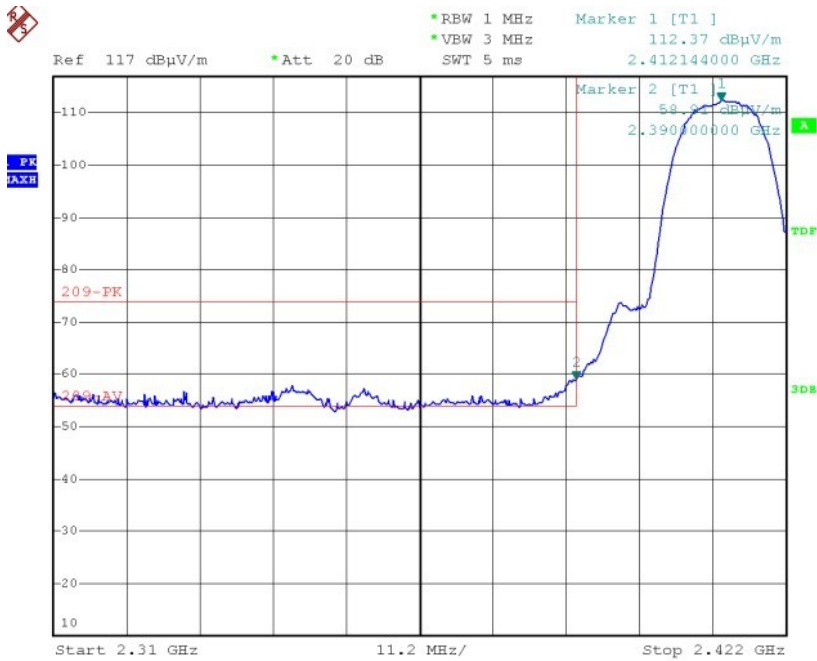

### Horizontal-Peak

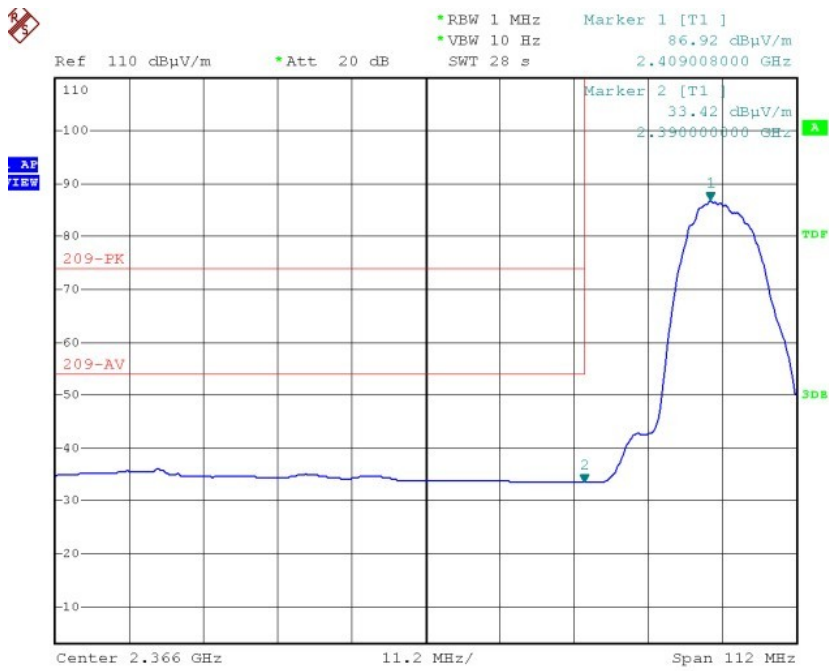


**Vertical-Average**

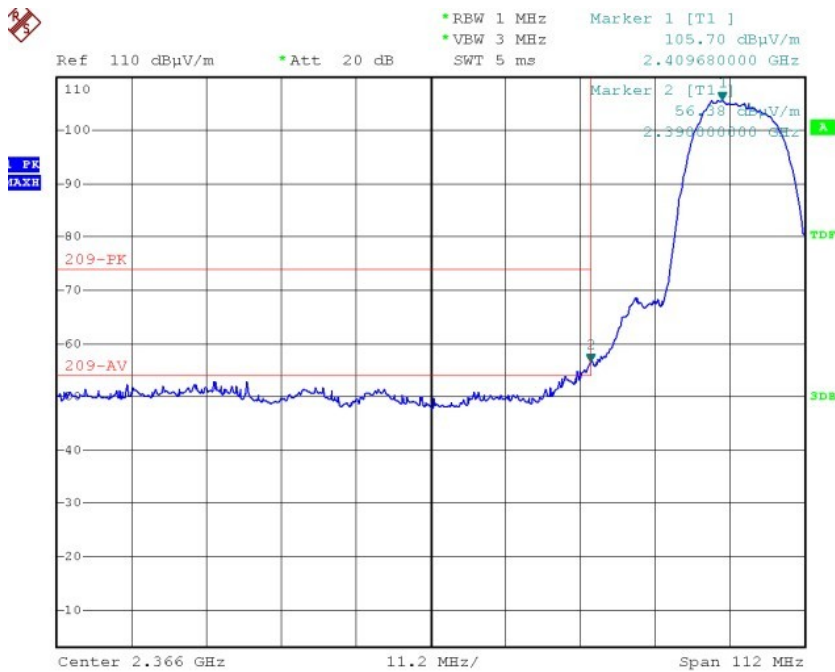


**Vertical-Peak**


## Radiated Band Edge Test Plot: 2462MHz

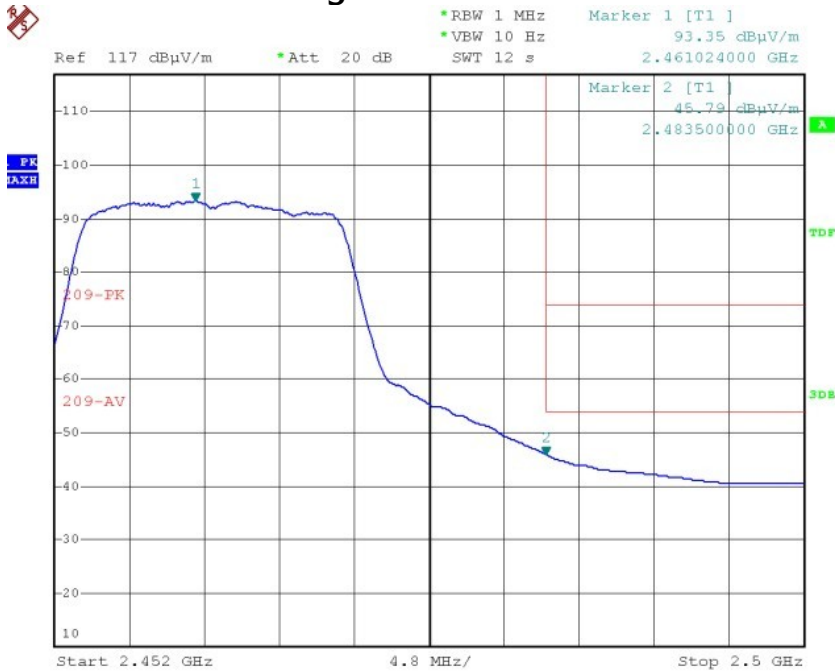


### Horizontal-Average

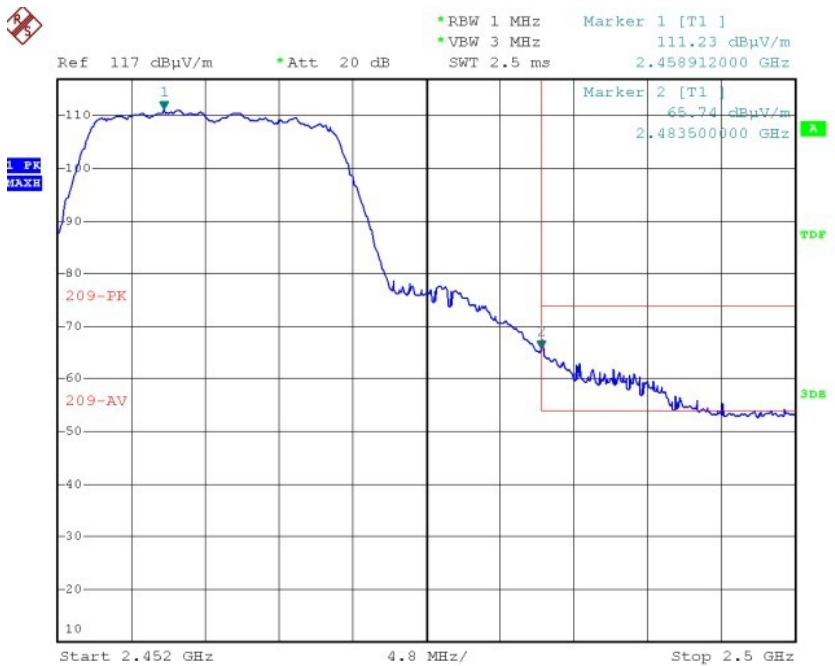

### Horizontal-Peak

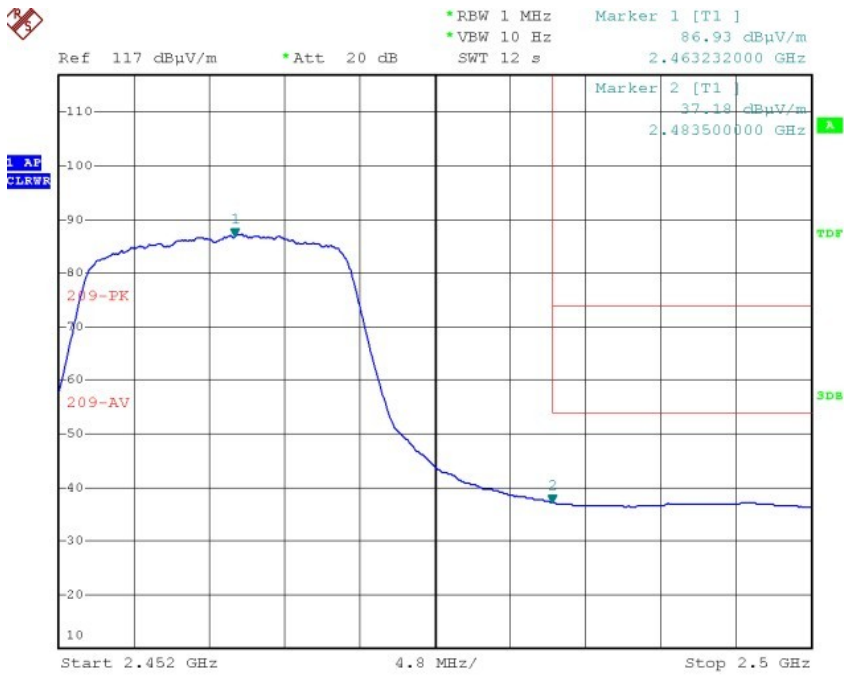


**Vertical- Average**

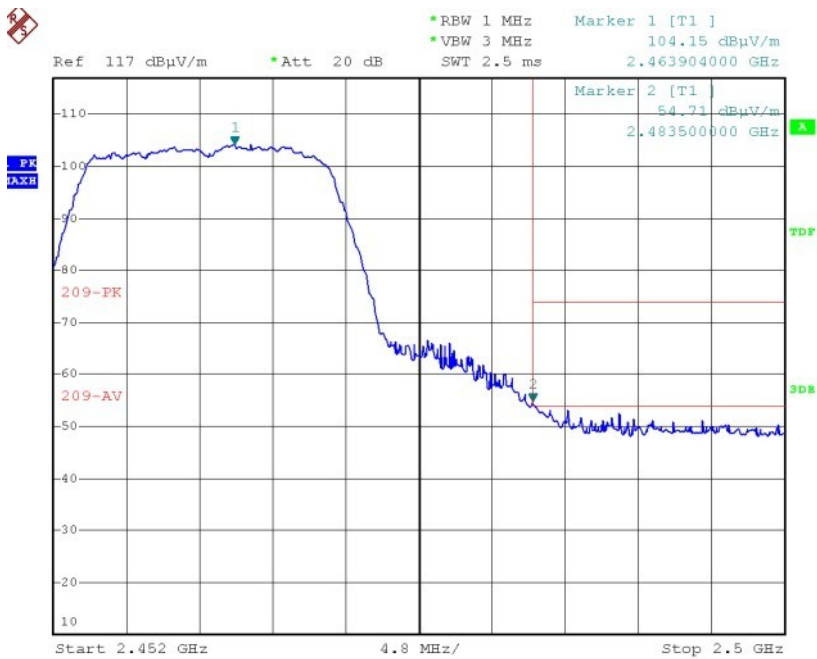


**Vertical- Peak**


## Conducted Spurious Emission Test Plot

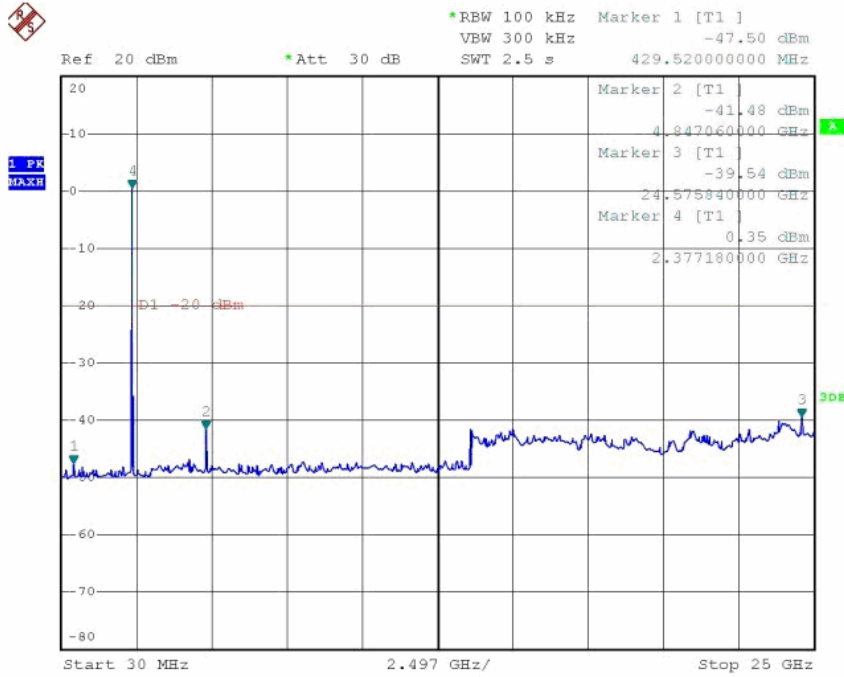

**Low Channel: 2412MHz**

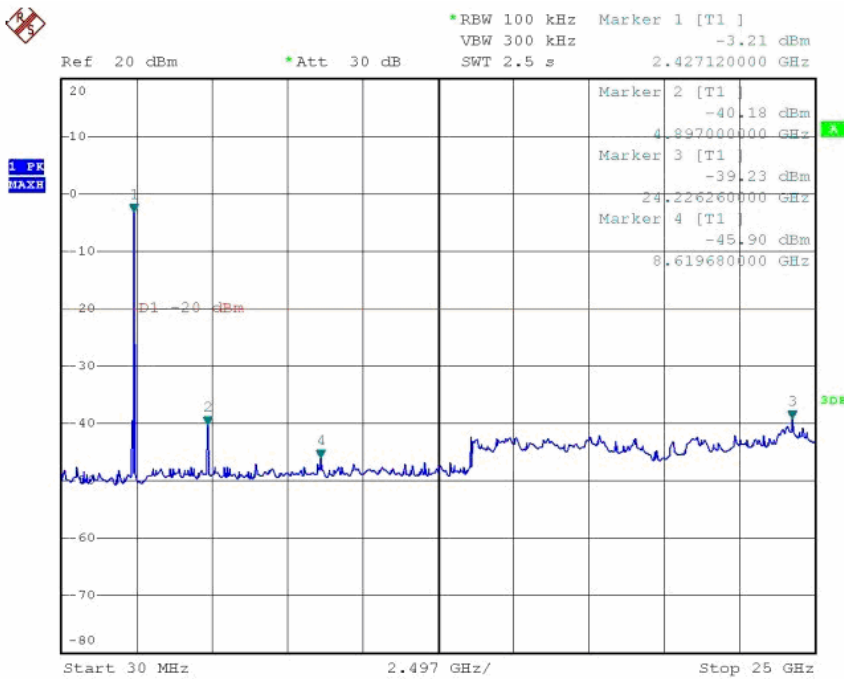


**Mid Channel: 2437MHz**

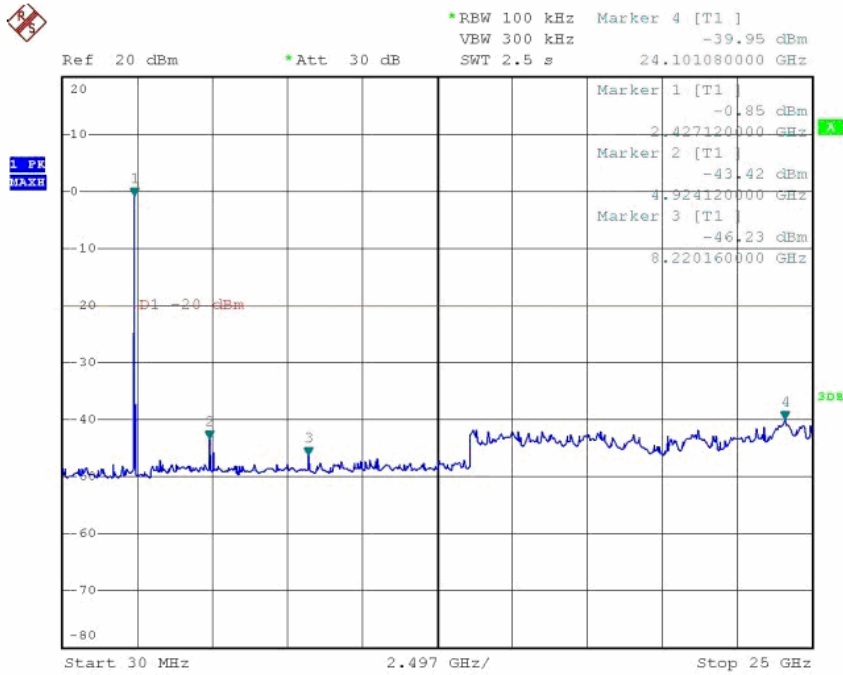


**High Channel: 2462MHz**

**For 802.11g Mode:**

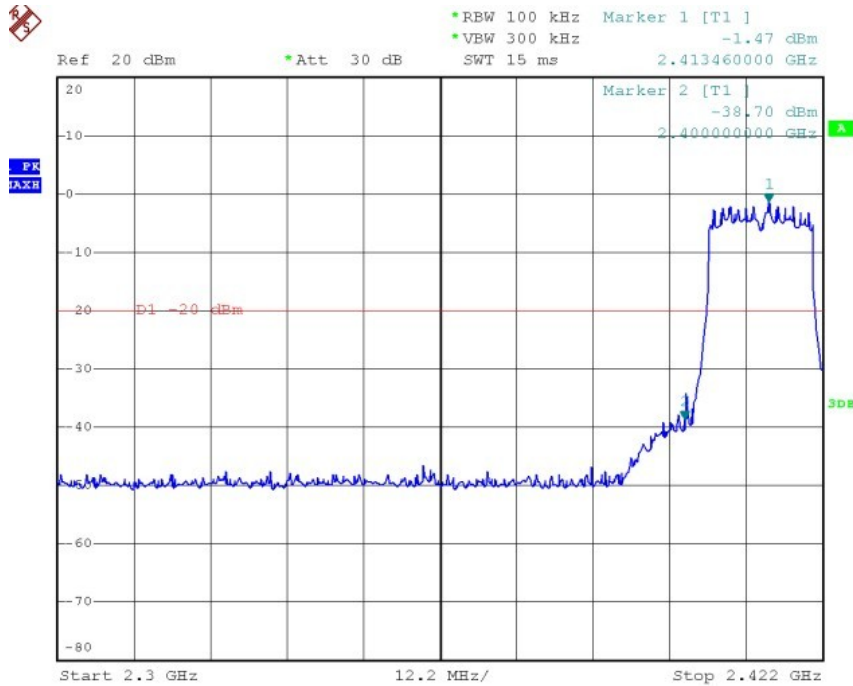


**Conducted Band Edge Test Plot: 2412MHz**

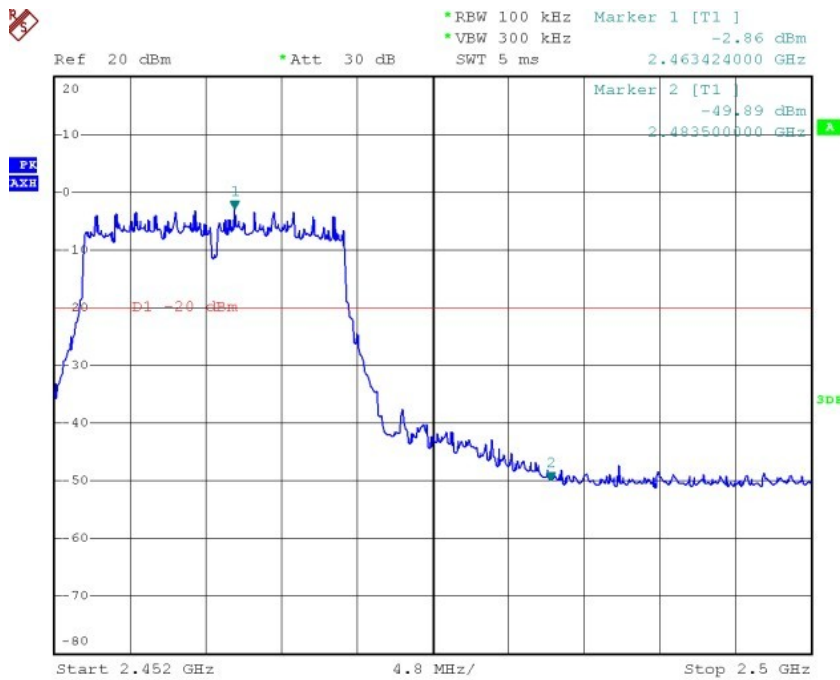


**Conducted Band Edge Test Plot: 2462MHz**




## Radiated Band Edge Test Plot: 2412MHz

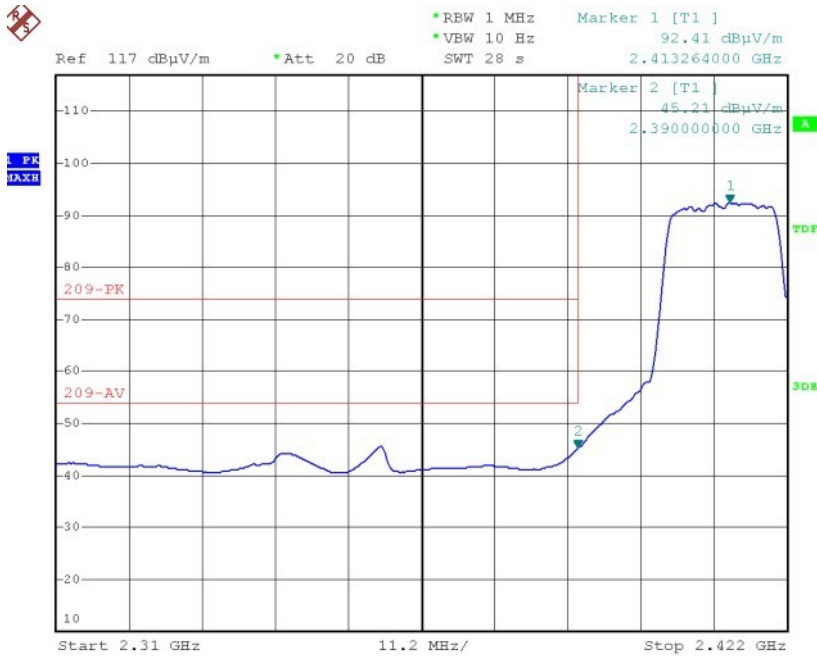


### Horizontal- Average

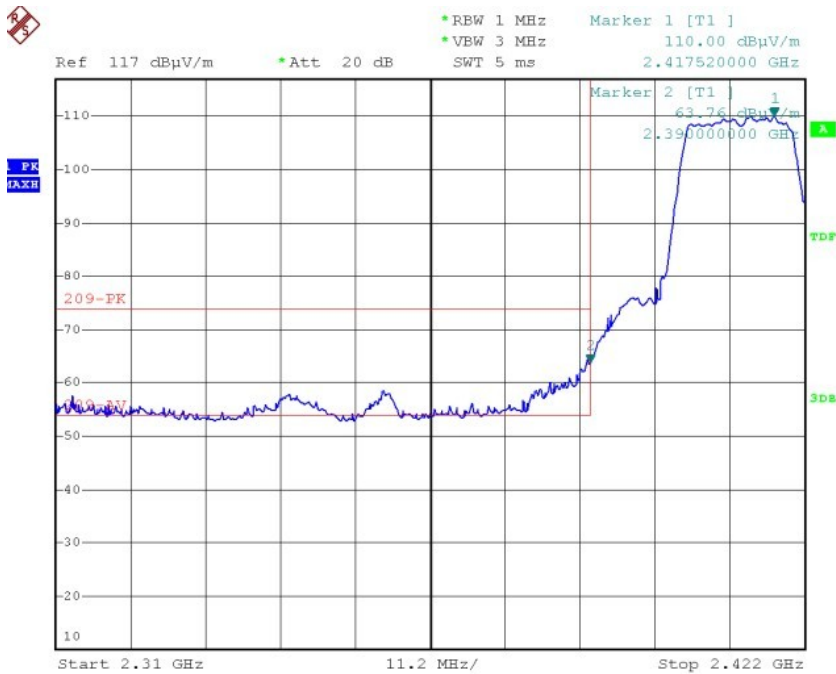

### Horizontal-Peak

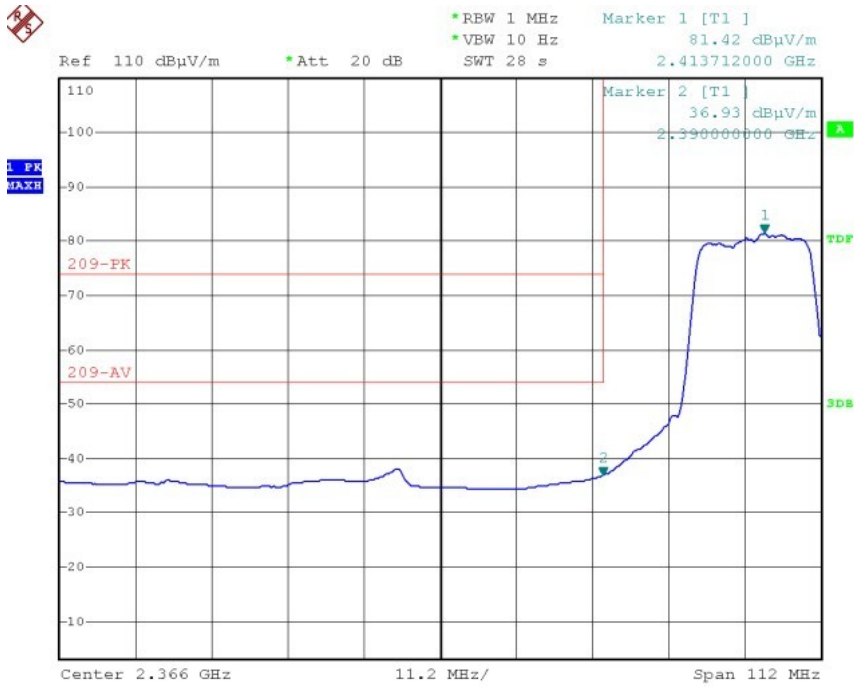


**Vertical-Average**

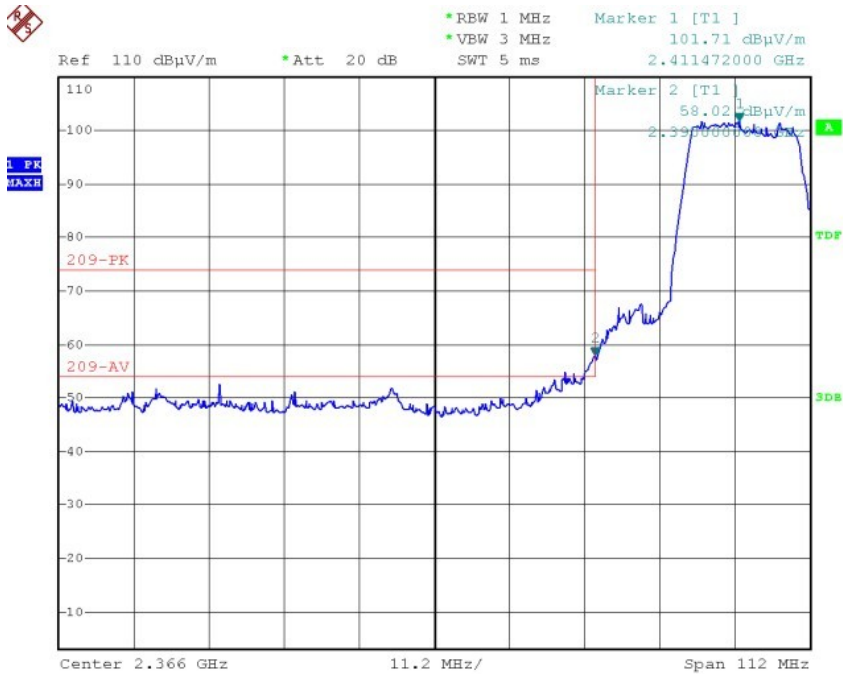


**Vertical-Peak**


## Radiated Band Edge Test Plot: 2462MHz

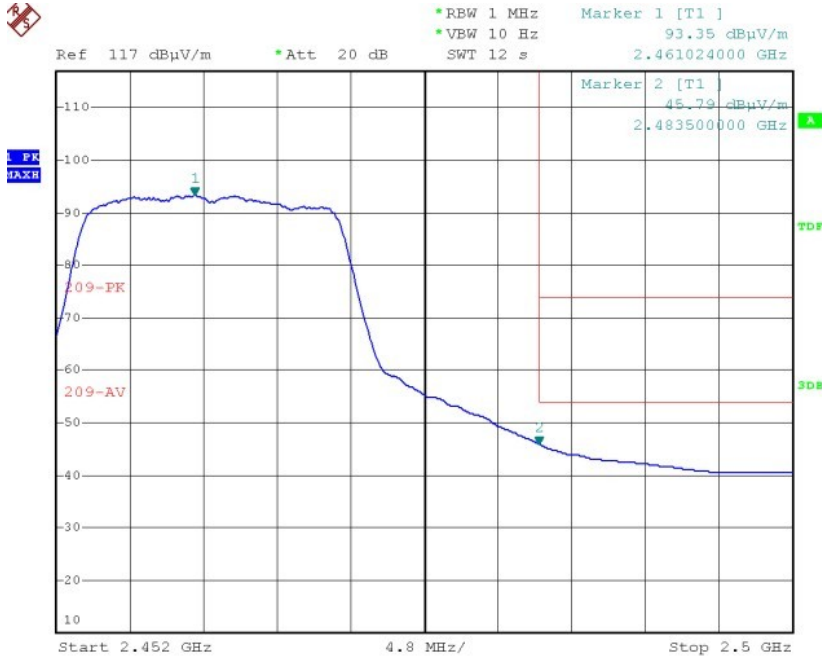


### Horizontal- Average

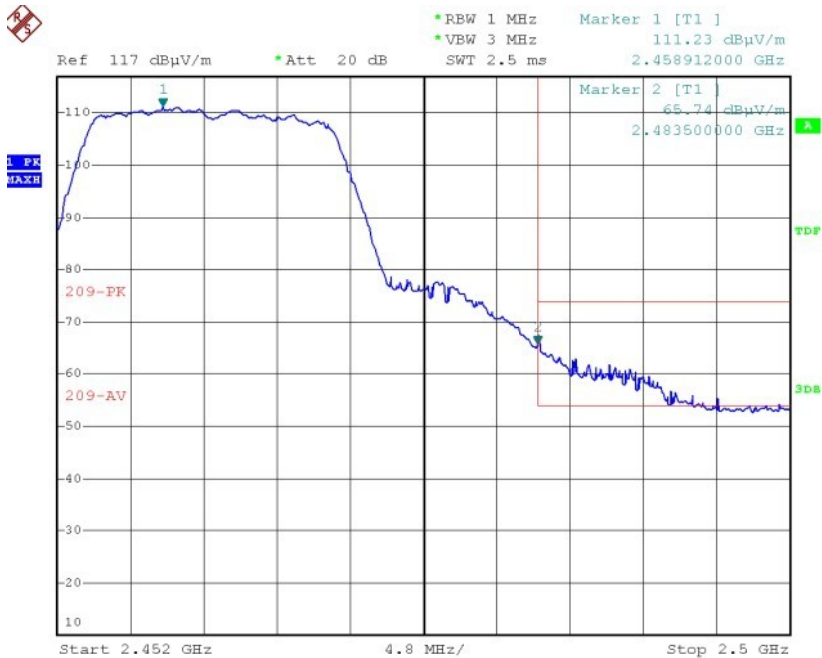

### Horizontal-Peak

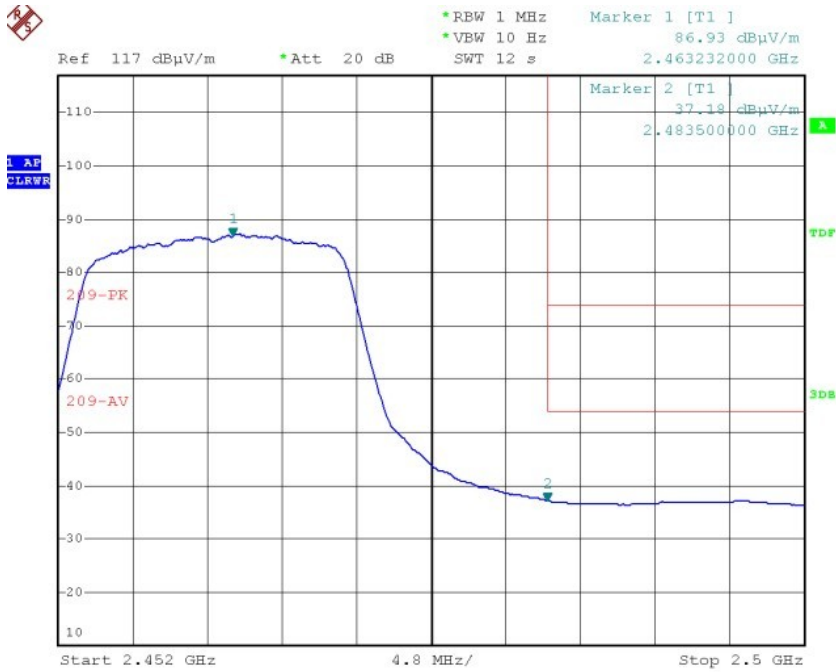


**Vertical-Average**

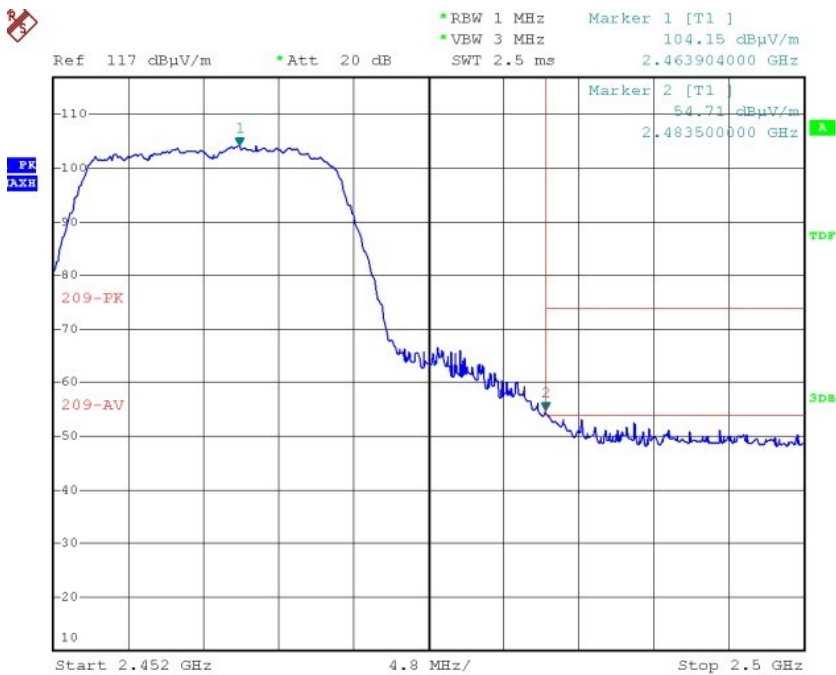


**Vertical-Peak**


## Conducted Spurious Emission Test Plot

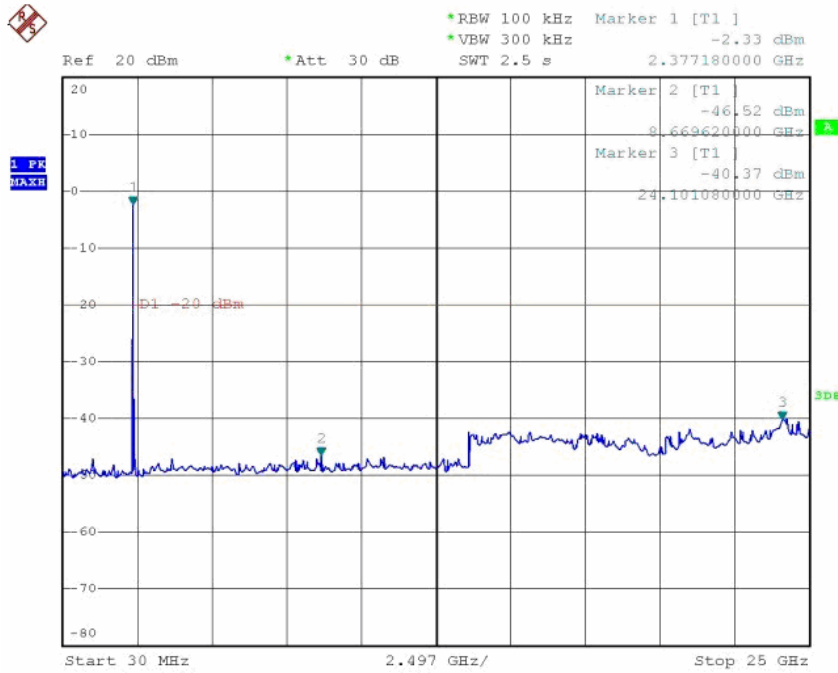

**Low Channel: 2412MHz**

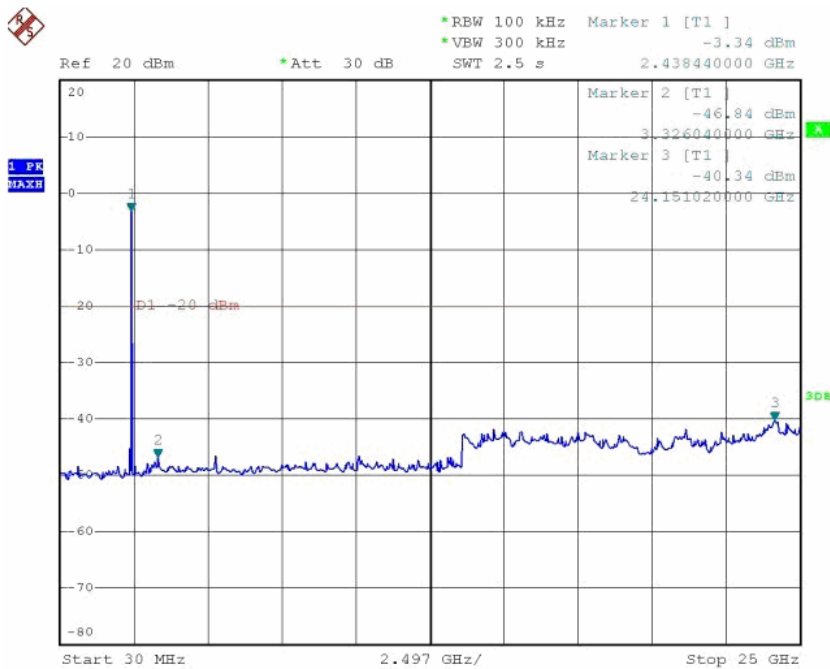


**Mid Channel: 2437MHz**

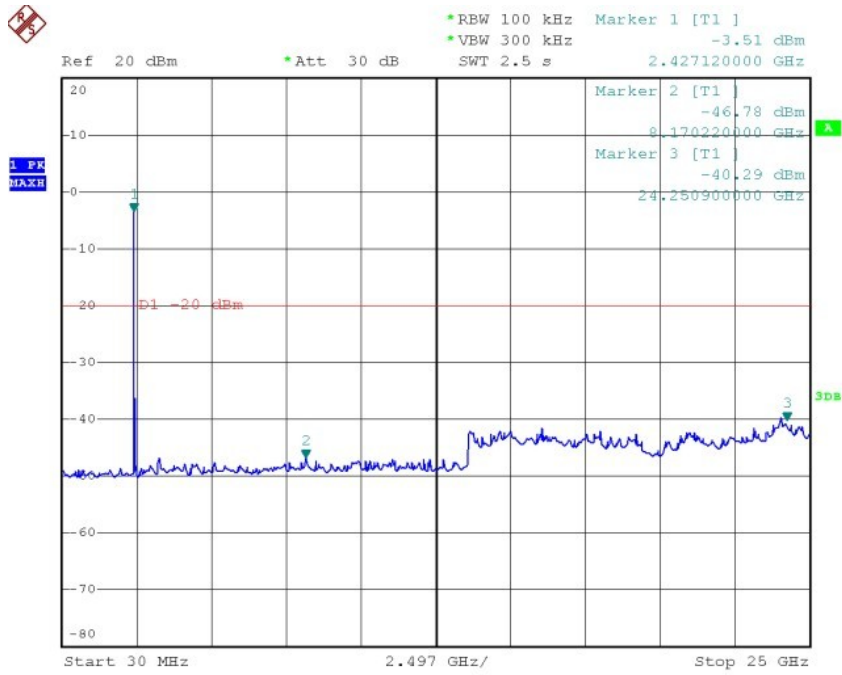


**High Channel: 2462MHz**

**For 802.11n HT20 Mode:**

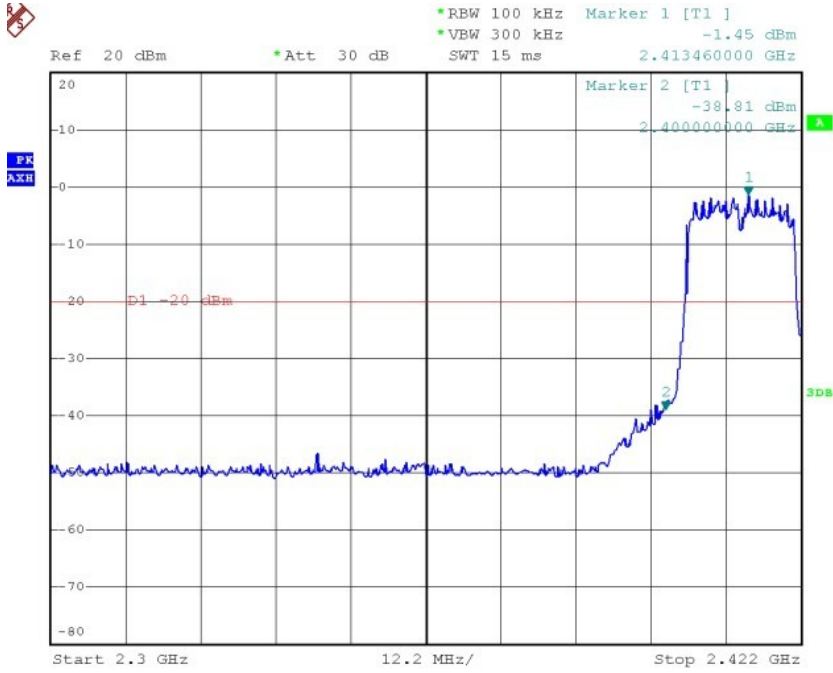


**Conducted Band Edge Test Plot: 2412MHz**

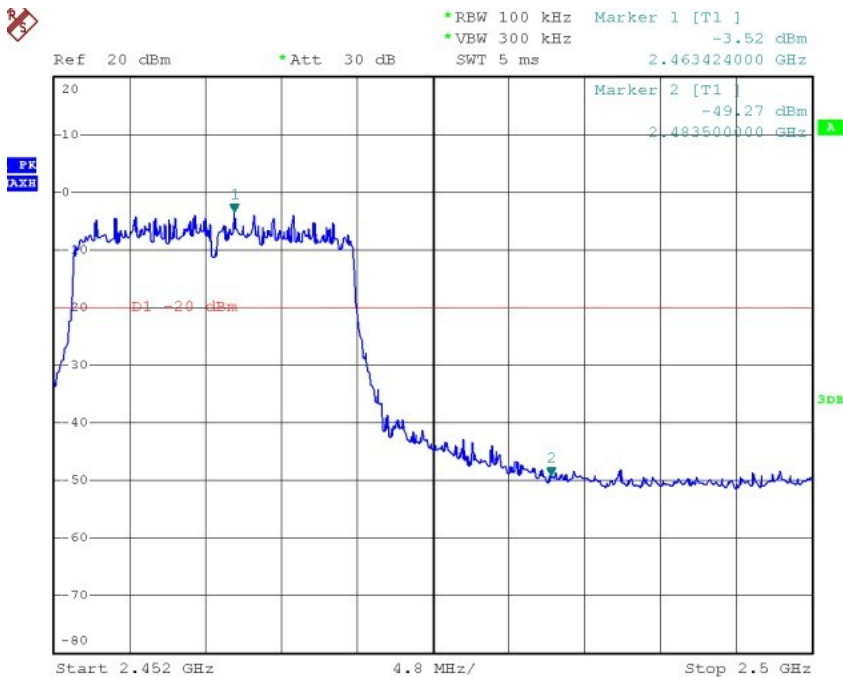


**Conducted Band Edge Test Plot: 2462MHz**

## Radiated Band Edge Test Plot: 2412MHz

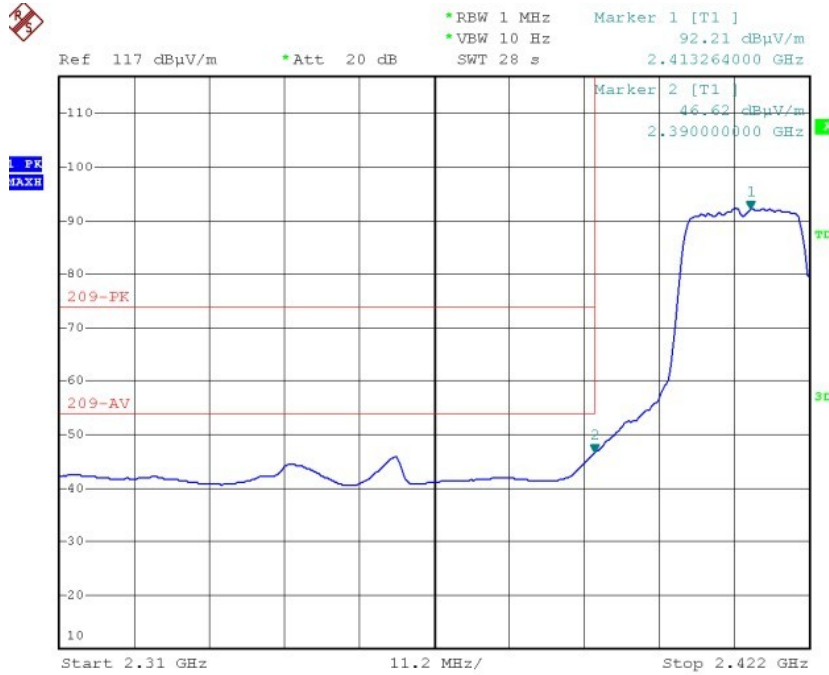


### Horizontal- Average

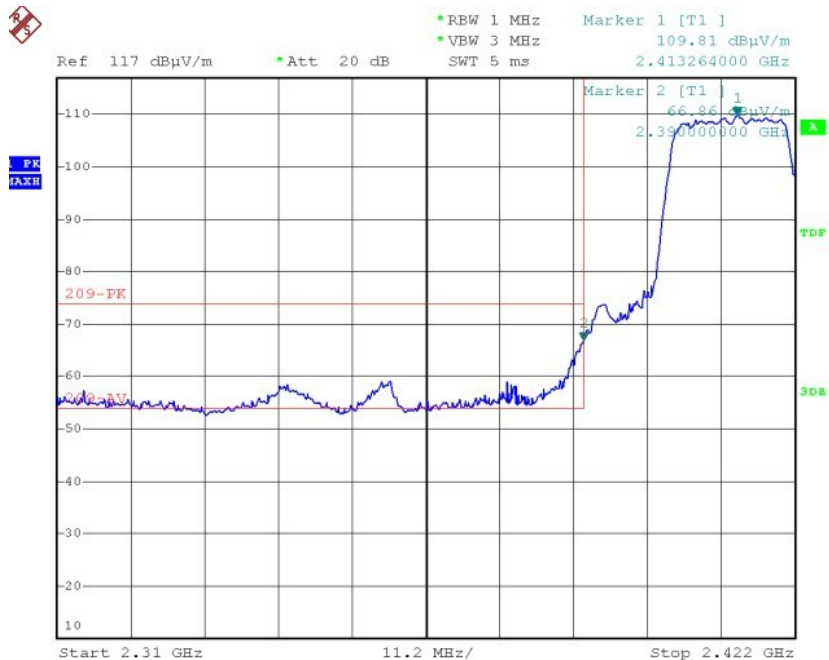


### Horizontal-Peak



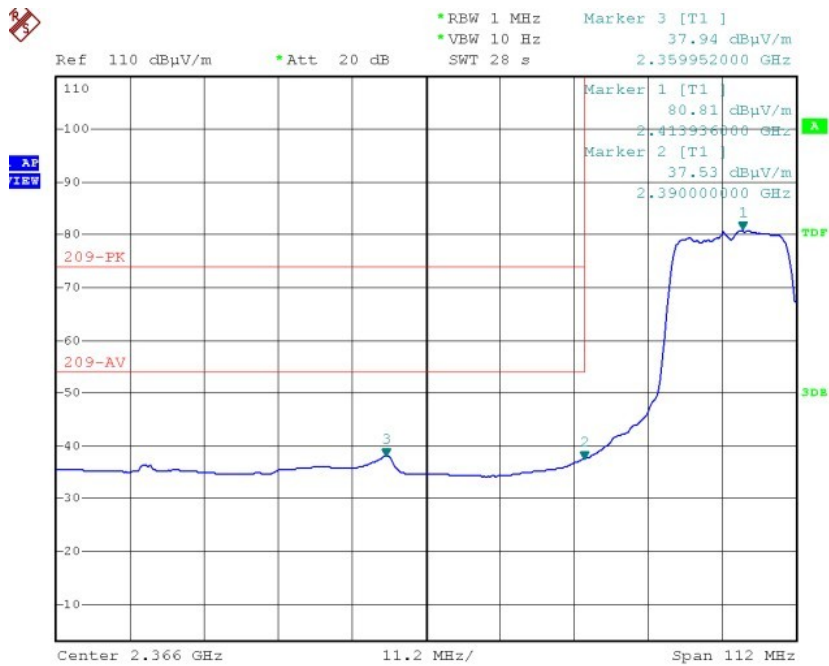


### Vertical-Average

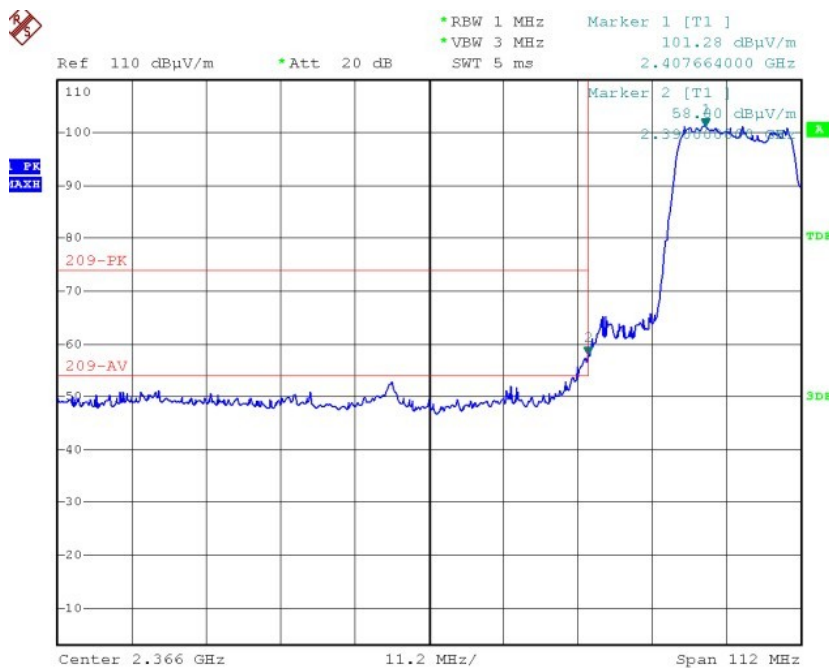


### Vertical-Peak


## Radiated Band Edge Test Plot: 2462MHz

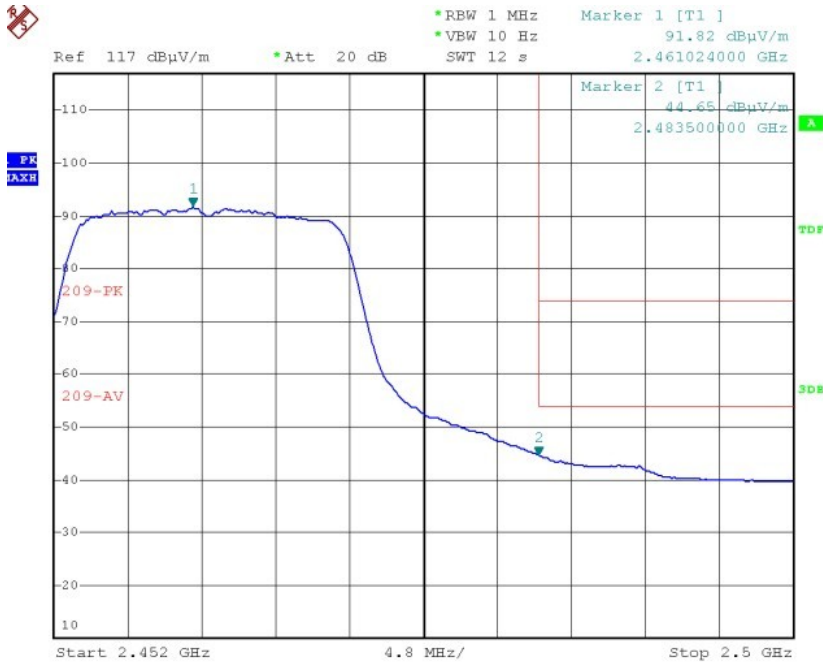


### Horizontal- Average

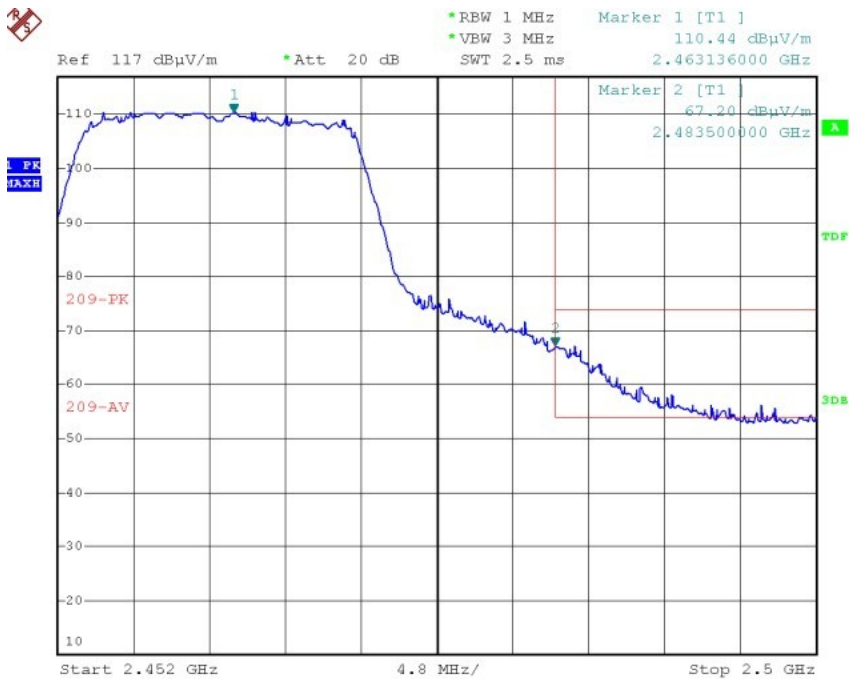

### Horizontal-Peak

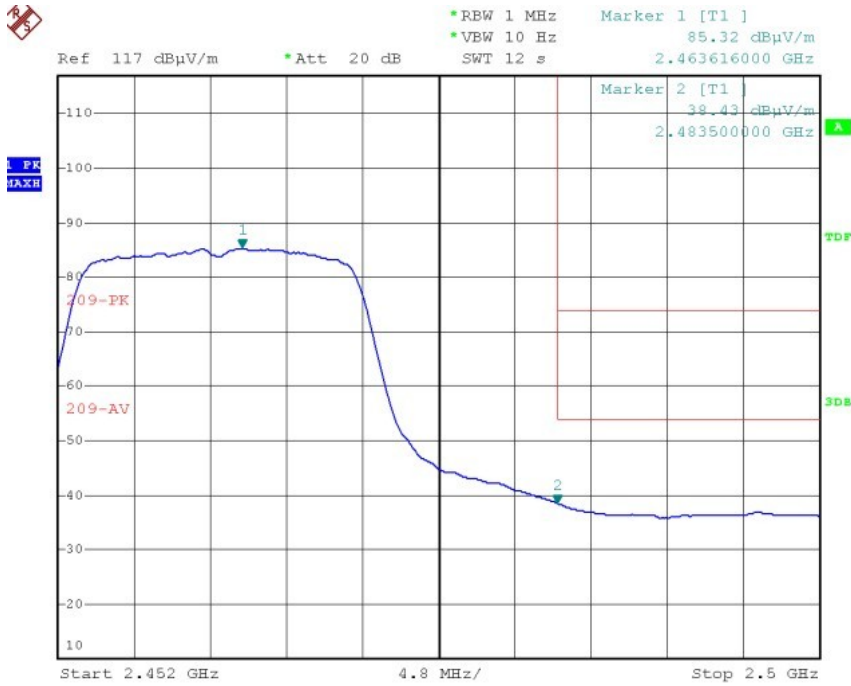


**Vertical-Average**

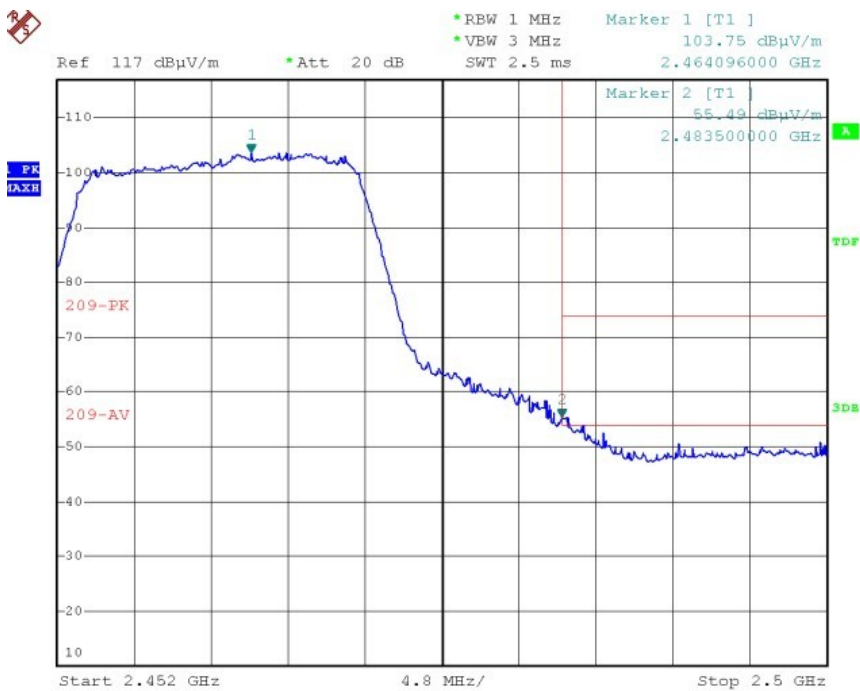


**Vertical-Peak**


## Conducted Spurious Emission Test Plot

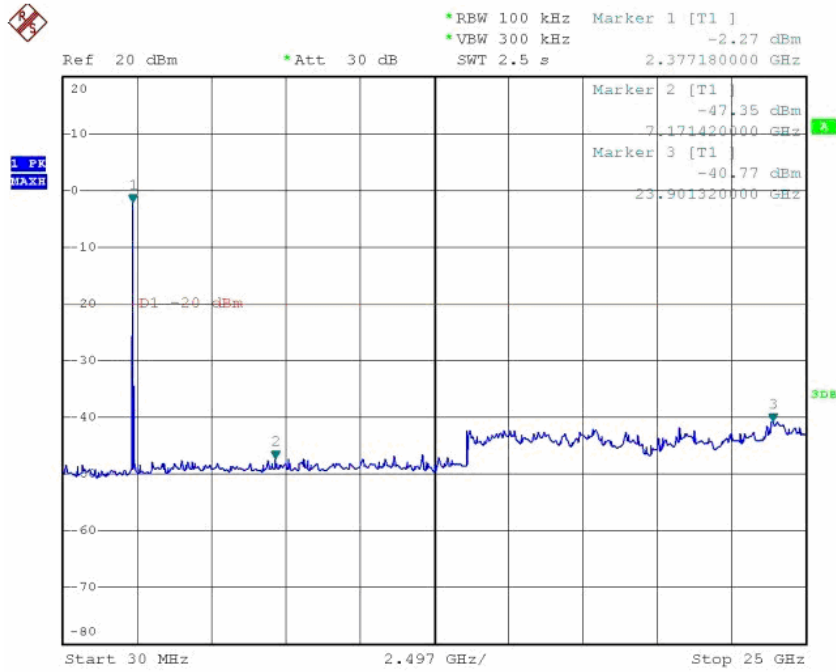

**Low Channel: 2412MHz**

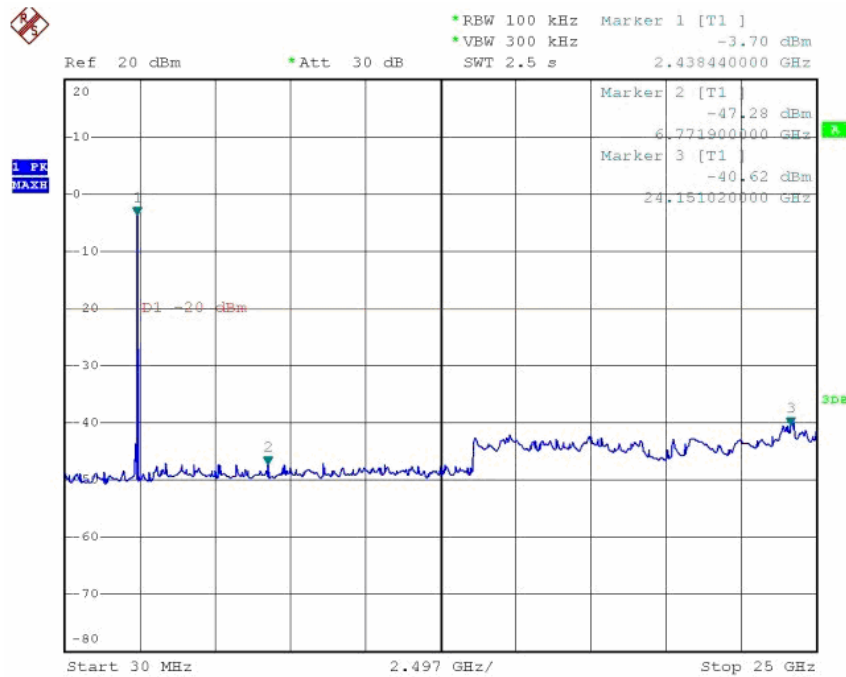


**Mid Channel: 2437MHz**

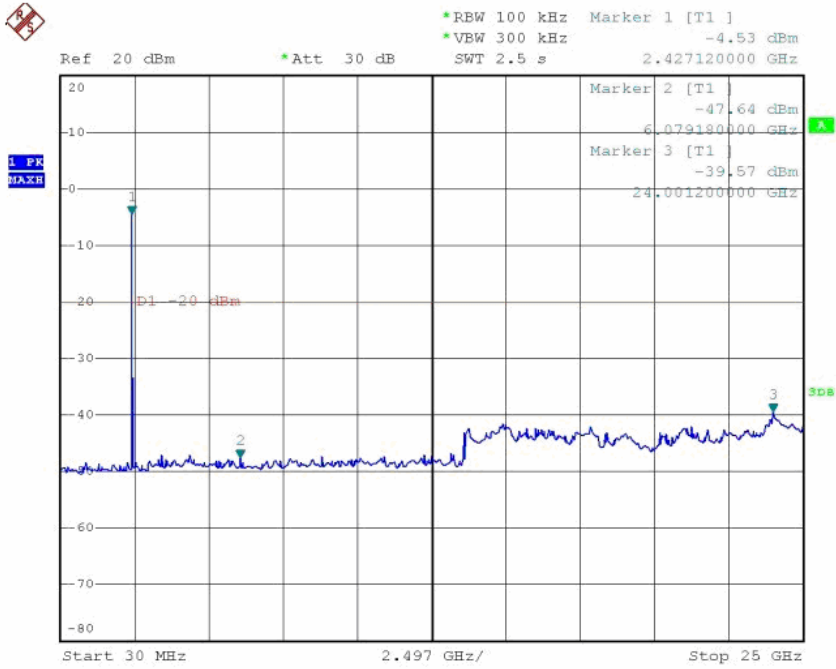


**High Channel: 2462MHz**

For 802.11n HT40 Mode:


### Conducted Band Edge Test Plot: 2422MHz

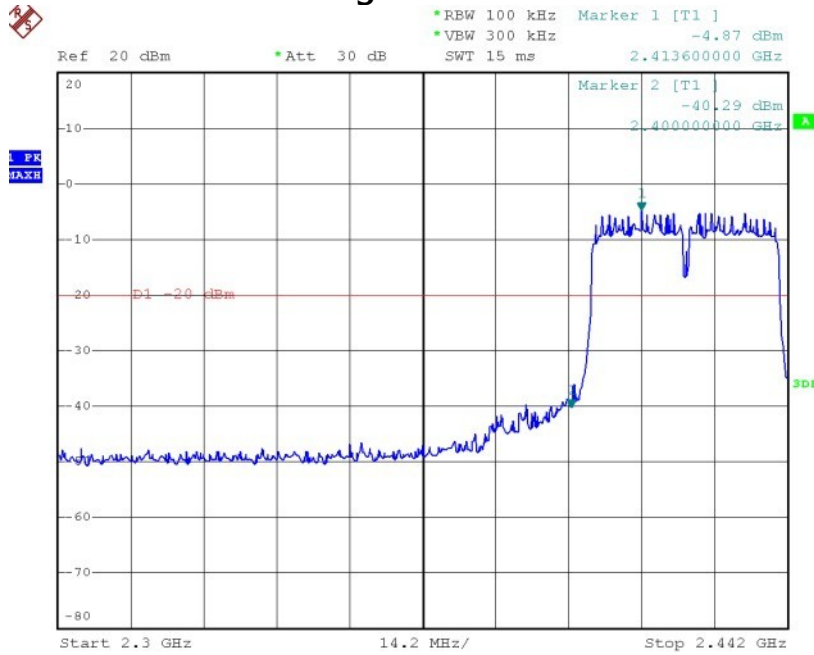


### Conducted Band Edge Test Plot: 2452MHz

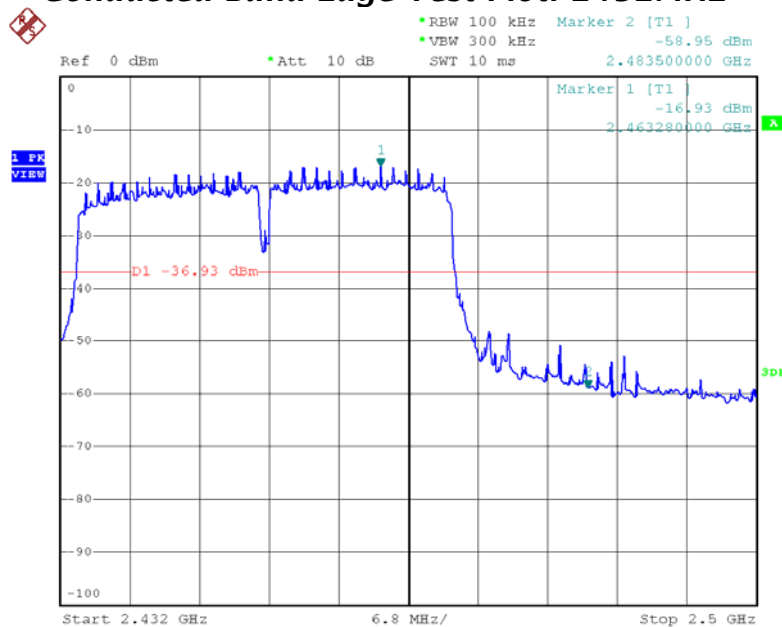


## Radiated Band Edge Test Plot: 2422MHz

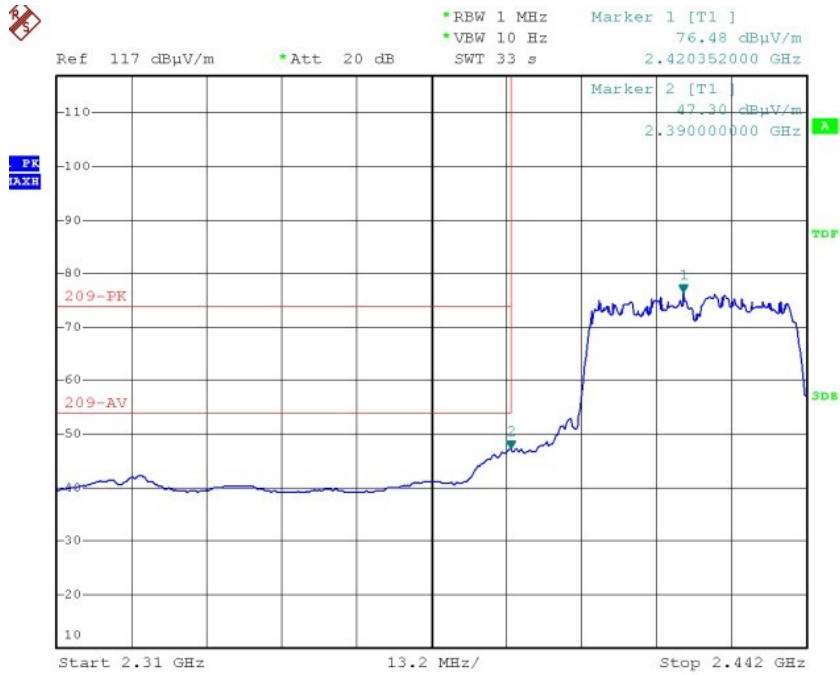


### Horizontal- Average

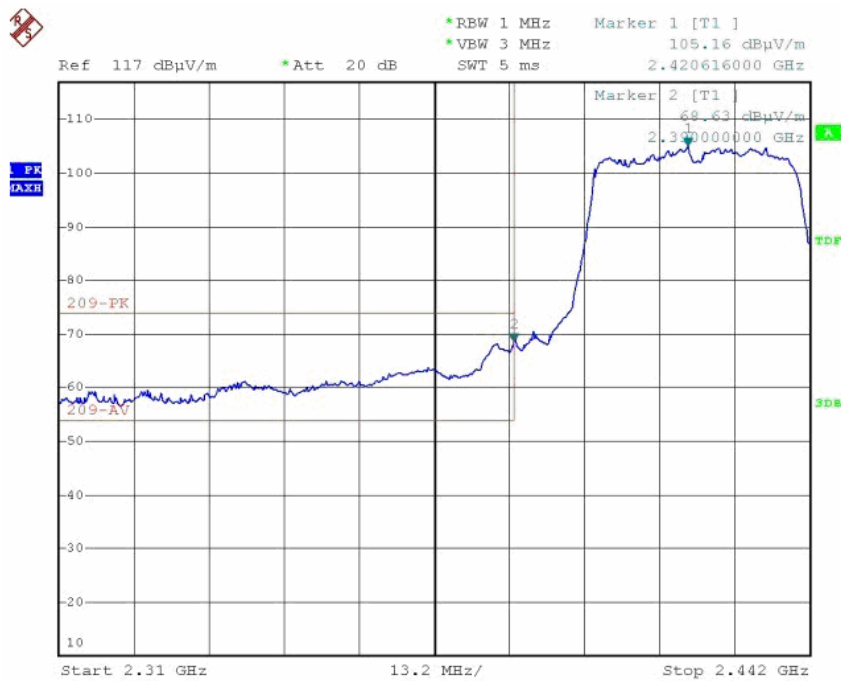

### Horizontal-Peak

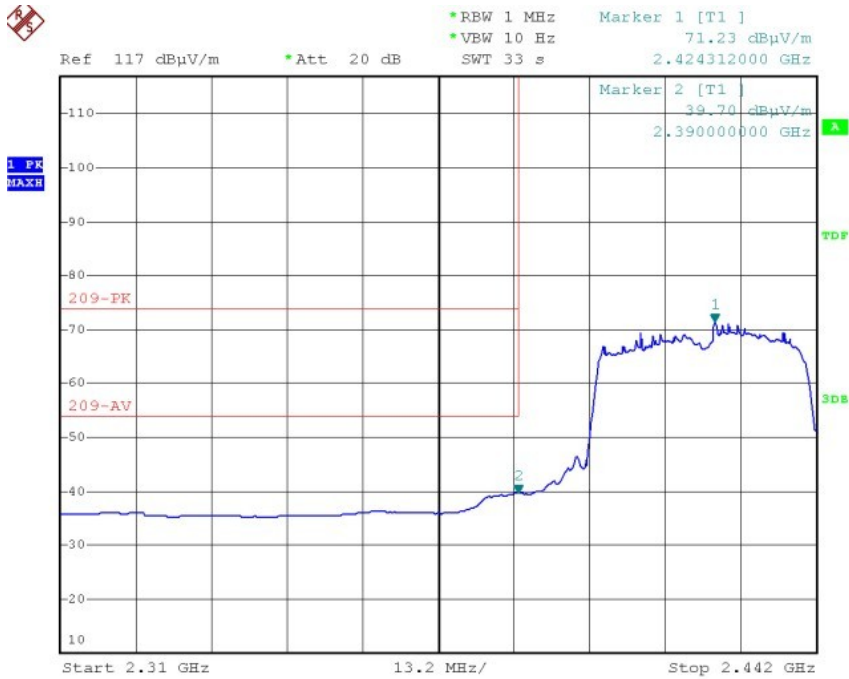


**Vertical- Average**

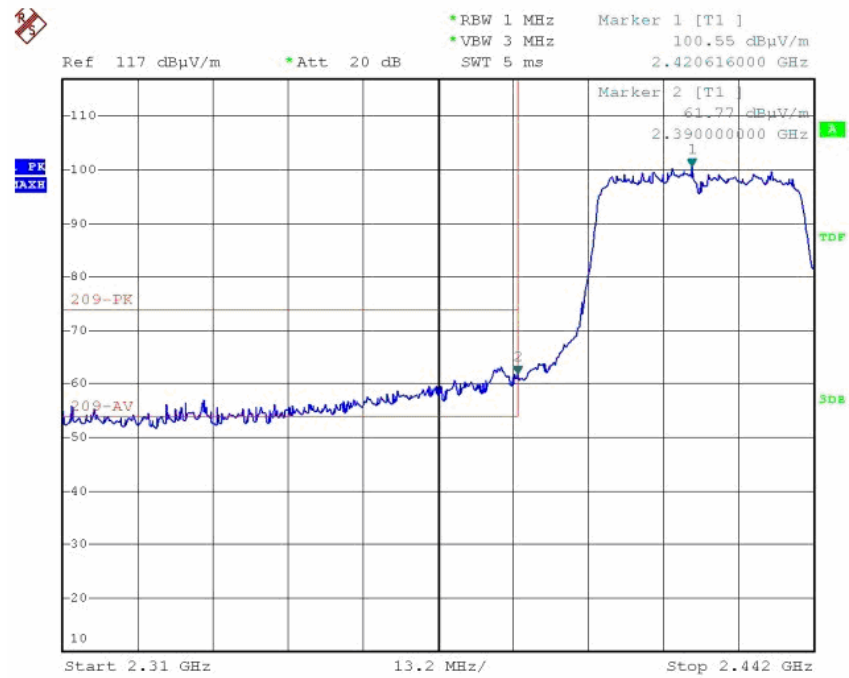


**Vertical-Peak**




## Radiated Band Edge Test Plot: 2452MHz

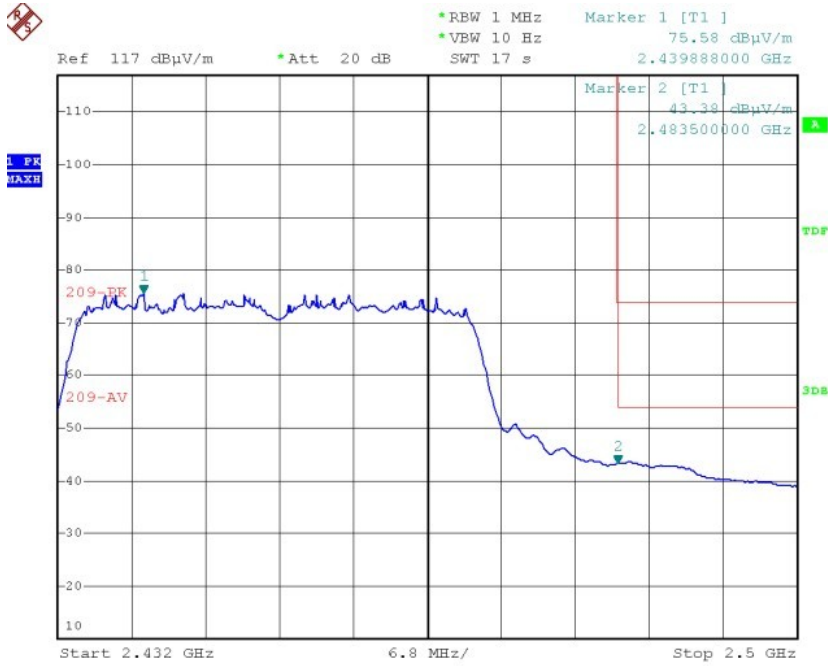


## Horizontal- Average

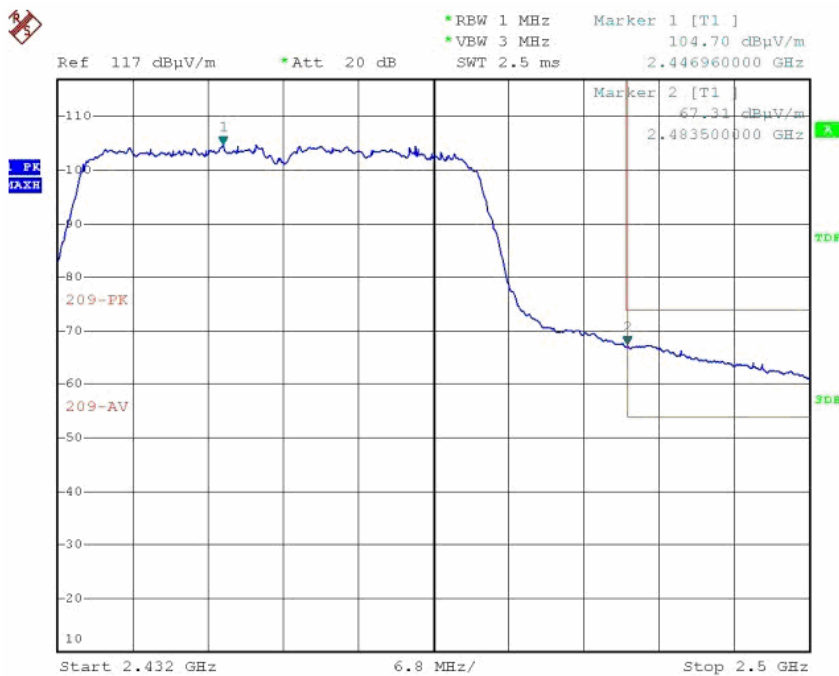

## Horizontal-Peak

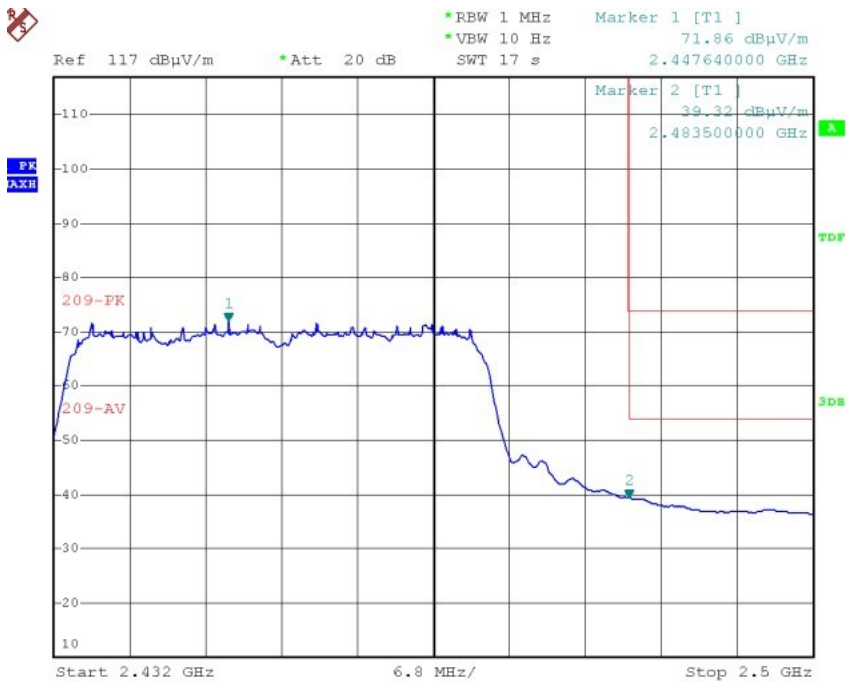


**Vertical-Average**

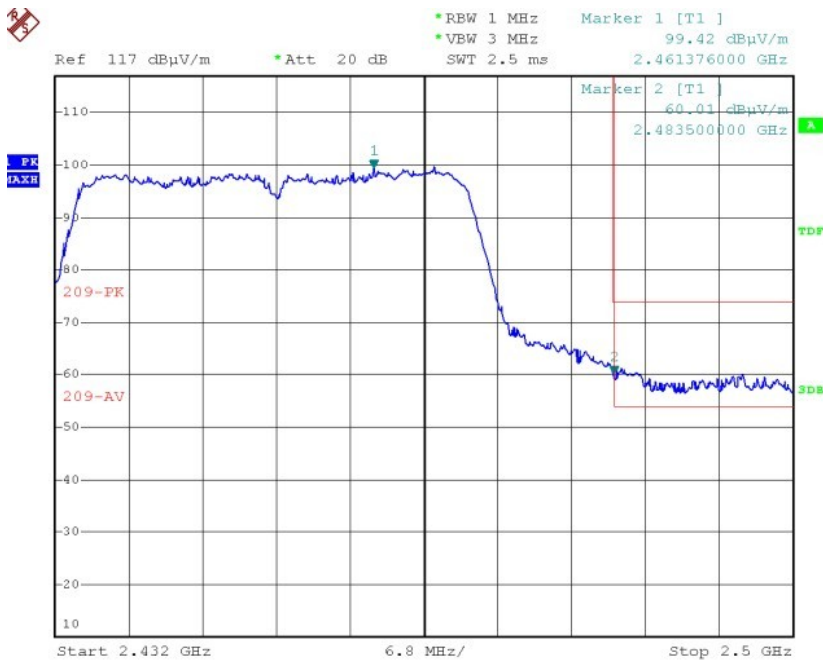


**Vertical-Peak**


## Conducted Spurious Emission Test Plot

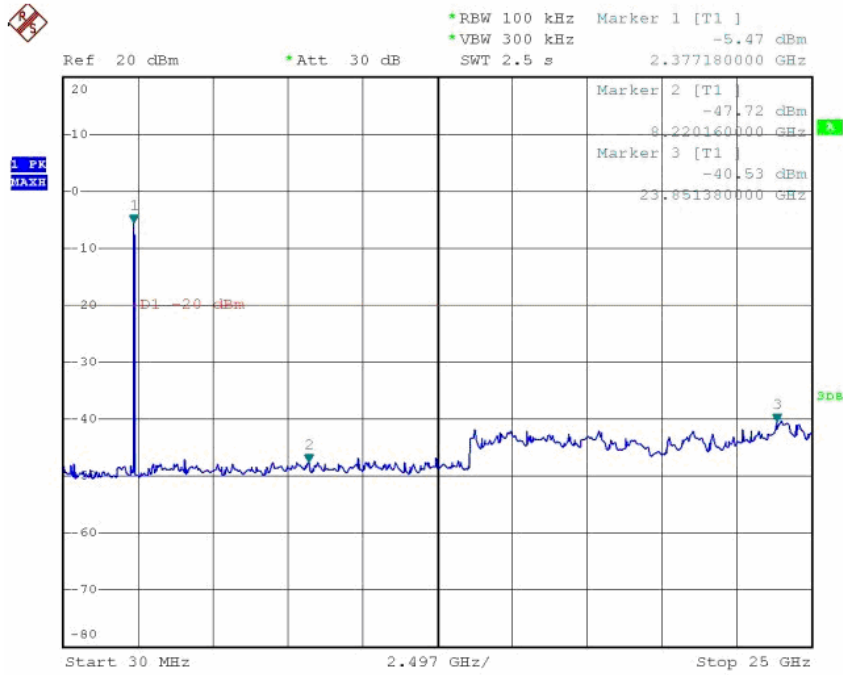

**Low Channel: 2422MHz**

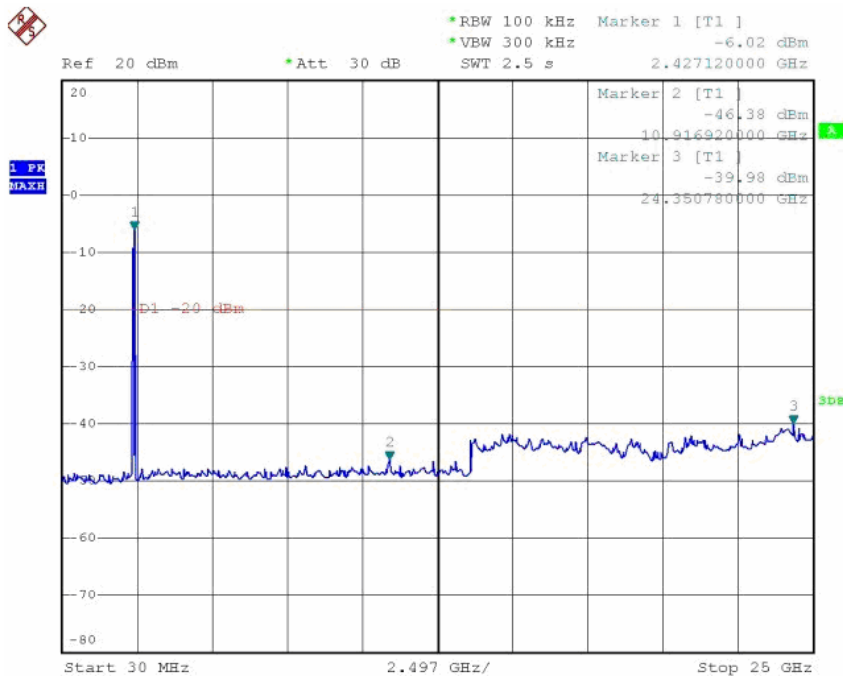

**Mid Channel: 2437MHz**

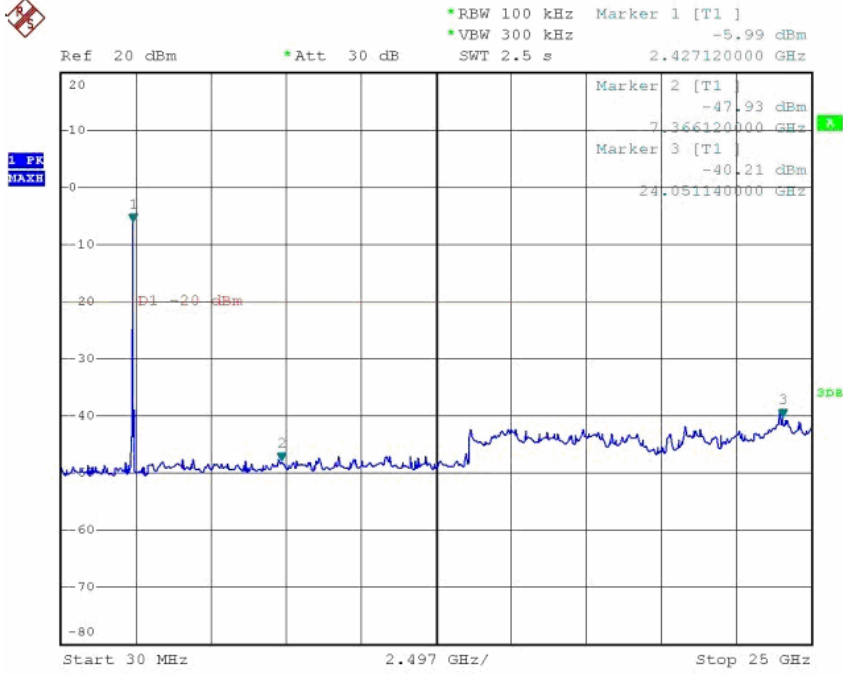

**High Channel: 2452MHz**

## ATTACHMENT 7 - PEAK POWER SPECTRAL DENSITY TEST

<b>CLIENT:</b>	GRANDSTREAM NETWORKS,INC.	<b>TEST STANDERD:</b>	Section 15.247(d)												
<b>MODEL NUMBERS:</b>	GXV3175	<b>PRODUCT:</b>	IP Multimedia Phone												
<b>EUT MODEL:</b>	GXV3175	<b>EUT DESIGNATION:</b>	Digital Transmission Device												
<b>TEMPERATURE:</b>	23°C	<b>HUMIDITY:</b>	47%RH												
<b>ATM PRESSURE:</b>	101.0kPa	<b>GROUNDING:</b>	None												
<b>TESTED BY:</b>	Daomen	<b>DATE OF TEST:</b>	August 27 <sup>th</sup> , 2012												
<b>TEST REFERENCE:</b>	ANSI C63.10:2009 and KDB Publication No. 558074 D01.														
<b>TEST PROCEDURE:</b>	Regulation 15.247(d) for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.The EUT was set transmitting continuously and force selection of output power level and channel number. We'd observed that the peak levels aren't greater than +8dBm limit. The EUT was set up as ANSI C63.10: 2009, tested to DTS test procedure of 558074 D01 for compliance to FCC 47CFR 15.247 requirements.														
<b>DESCRIPTIONS OF TEST MODE:</b>	Pre-Scan has been conducted to determine the worst-case mode from all possible Combinations between available modulations,data rates and antenna ports (if EUT with antenna diversity architecture). Following channels were selected for the final test as listed below: 802.11b mode with data rate of 1mbps, 802.11g mode with data rate of 6mbps,802.11n ht20 mode with data rate of 6.5mbps and 802.11n ht40 mode with data rate of 13.5mbps.														
<b>EQUIPMENT SETUP</b>	Spectrum analyzer shall be set as below:														
	<table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th style="width: 50%;">Equipment Mode</th> <th style="width: 50%;">Spectrum Analyzer</th> </tr> </thead> <tbody> <tr> <td>Detector Function</td> <td>Peak</td> </tr> <tr> <td>RBW</td> <td>3KHz</td> </tr> <tr> <td>VBW</td> <td>10KHz</td> </tr> <tr> <td>Span</td> <td>300KHz</td> </tr> <tr> <td>Sweep Time</td> <td>100S</td> </tr> </tbody> </table>			Equipment Mode	Spectrum Analyzer	Detector Function	Peak	RBW	3KHz	VBW	10KHz	Span	300KHz	Sweep Time	100S
Equipment Mode	Spectrum Analyzer														
Detector Function	Peak														
RBW	3KHz														
VBW	10KHz														
Span	300KHz														
Sweep Time	100S														
<b>TEST VOLTAGE:</b>	120VAC/60Hz														
<b>RESULTS:</b>	The EUT meet the requirements of test reference for power spectral density.The test results relate only to the equipment under test provided by client.														
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.														
<b>M. UNCERTAINTY:</b>	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp $\pm 2.6$ dB.														

**Peak Power Spectral Density Test Data:**

**For 802.11b Mode:**

Channel Frequency (MHz)	Power Spectral Density (dBm)	BWCF (db)	Cable Loss (dB)	Power Spectral Density Level (dBm)	Maximum Limit (dBm)	Margin (dB)
2412	1.98	-15.2	2.0	-11.22	8.00	-19.22
2437	0.91	-15.2	2.0	-12.29	8.00	-20.29
2462	1.76	-15.2	2.0	-11.44	8.00	-19.44

**For 802.11g Mode:**

Channel Frequency (MHz)	Power Spectral Density (dBm)	BWCF (db)	Cable Loss (dB)	Power Spectral Density Level (dBm)	Maximum Limit (dBm)	Margin (dB)
2412	-1.94	-15.2	2.0	-15.14	8.00	-23.14
2437	-2.34	-15.2	2.0	-15.54	8.00	-23.54
2462	-2.22	-15.2	2.0	-15.42	8.00	-23.42

**For 802.11n HT20 Mode:**

Channel Frequency (MHz)	Power Spectral Density (dBm)	BWCF (db)	Cable Loss (dB)	Power Spectral Density Level (dBm)	Maximum Limit (dBm)	Margin (dB)
2412	-1.67	-15.2	2.0	-14.87	8.00	-22.87
2437	-2.52	-15.2	2.0	-15.72	8.00	-23.72
2462	-3.25	-15.2	2.0	-16.45	8.00	-24.45


**For 802.11n HT40 Mode:**

Channel Frequency (MHz)	Power Spectral Density (dBm)	BWCF (db)	Cable Loss (dB)	Power Spectral Density Level (dBm)	Maximum Limit (dBm)	Margin (dB)
2412	-5.06	-15.2	2.0	-18.26	8.00	-18.26
2437	-5.58	-15.2	2.0	-18.78	8.00	-18.78
2452	-5.90	-15.2	2.0	-19.1	8.00	-19.1


Note: BWCF =  $10 \log (3 \text{ kHz}/100\text{kHz} = -15.2 \text{ dB})$ .

**For 802.11b Mode:**


**Low Channel: 2412MHz**

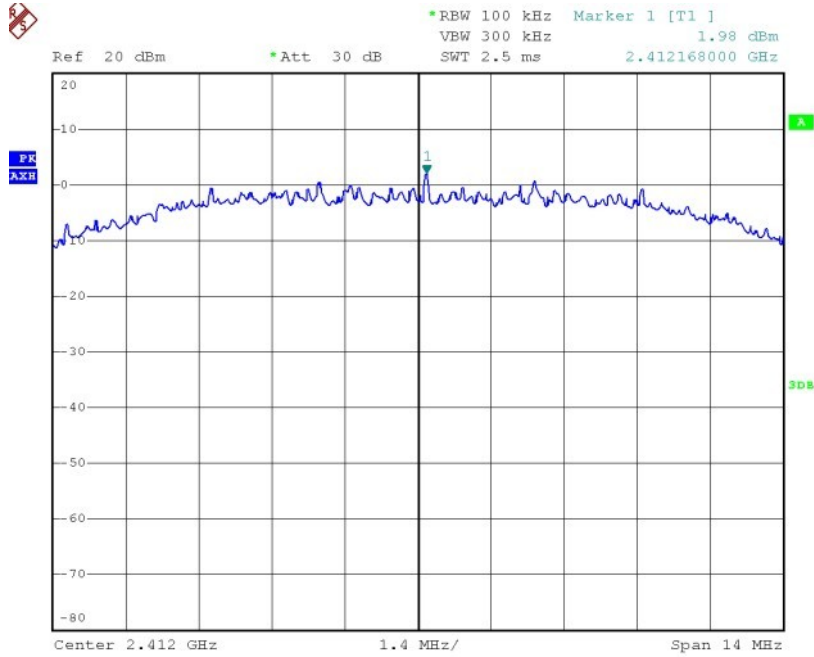

**Mid Channel: 2437MHz**

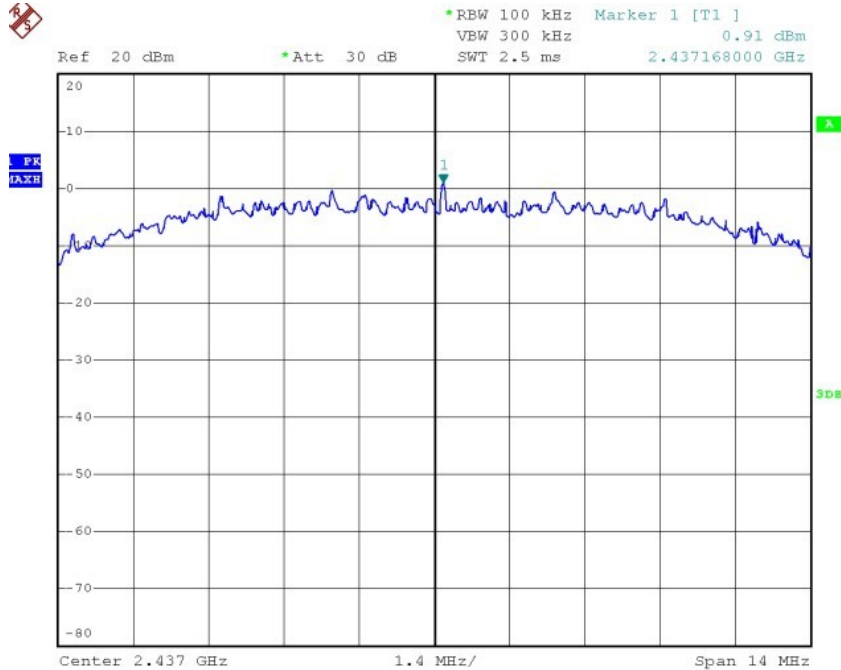


### High Channel: 2462MHz

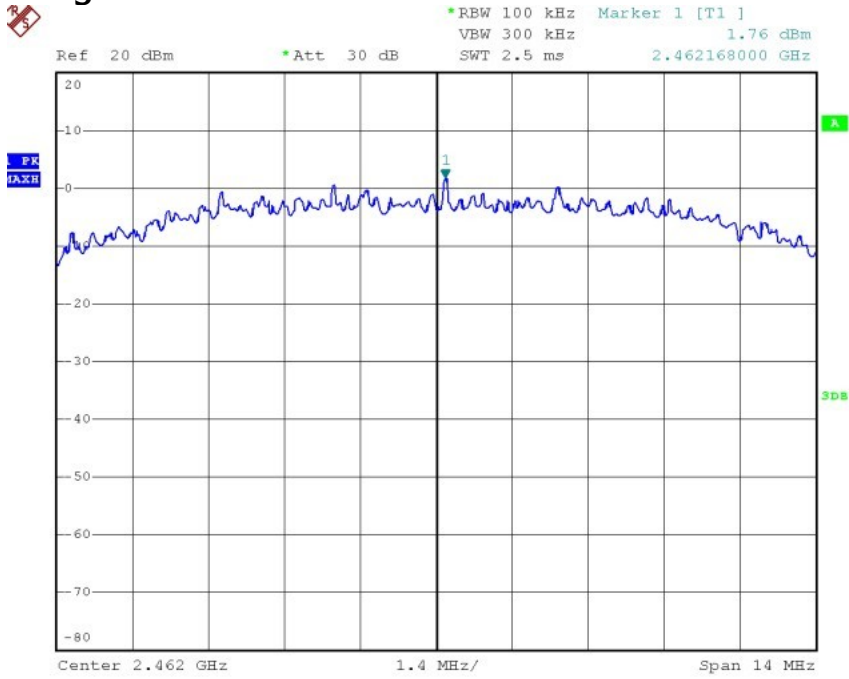


### For 802.11g Mode:

### Low Channel: 2412MHz

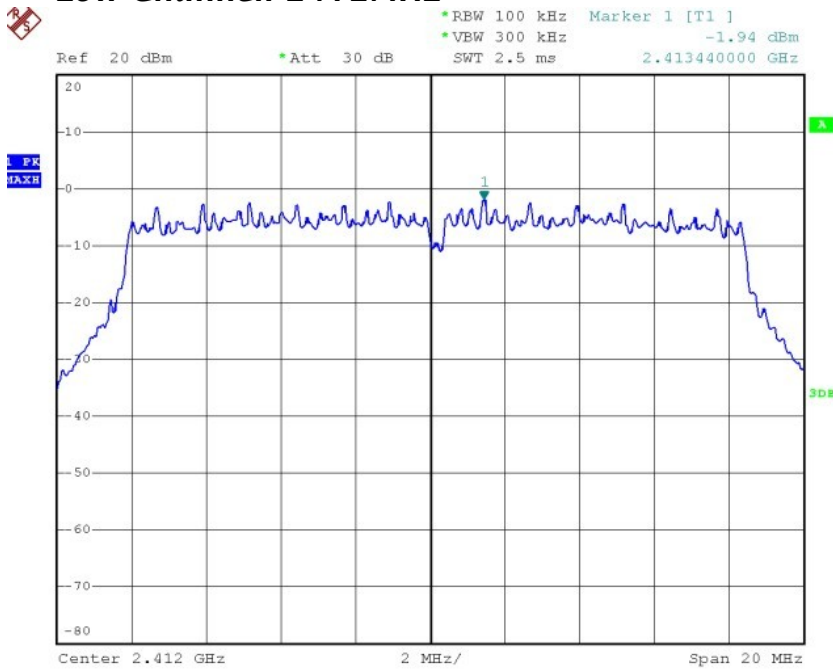




### Mid Channel: 2437MHz

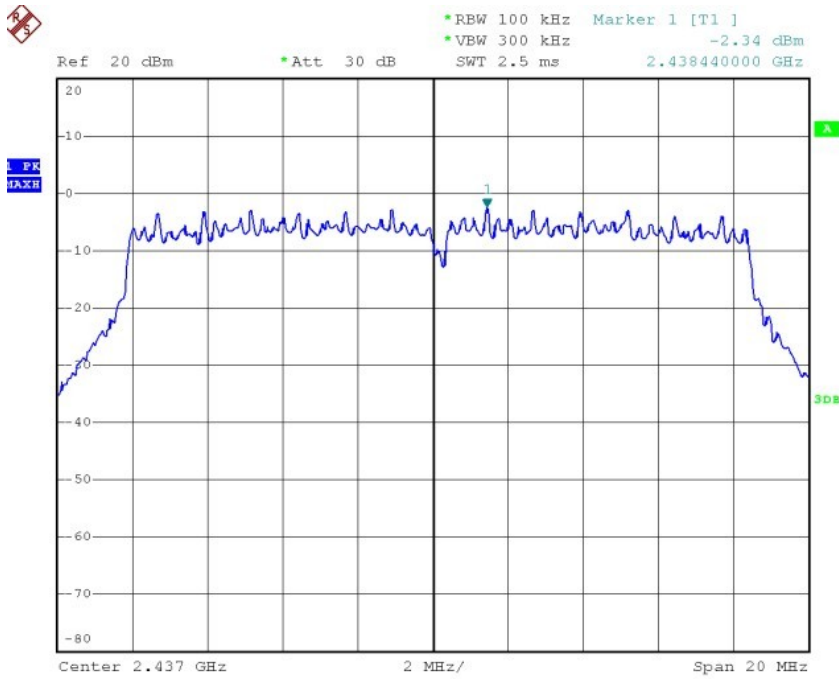


### High Channel: 2462MHz

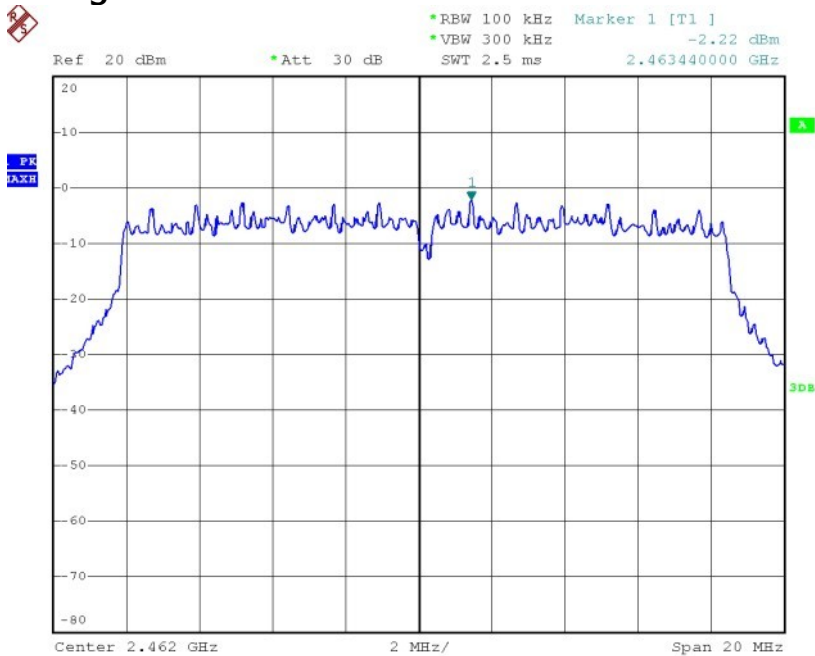


**For 802.11n HT20 Mode:**


**Low Channel: 2412MHz**

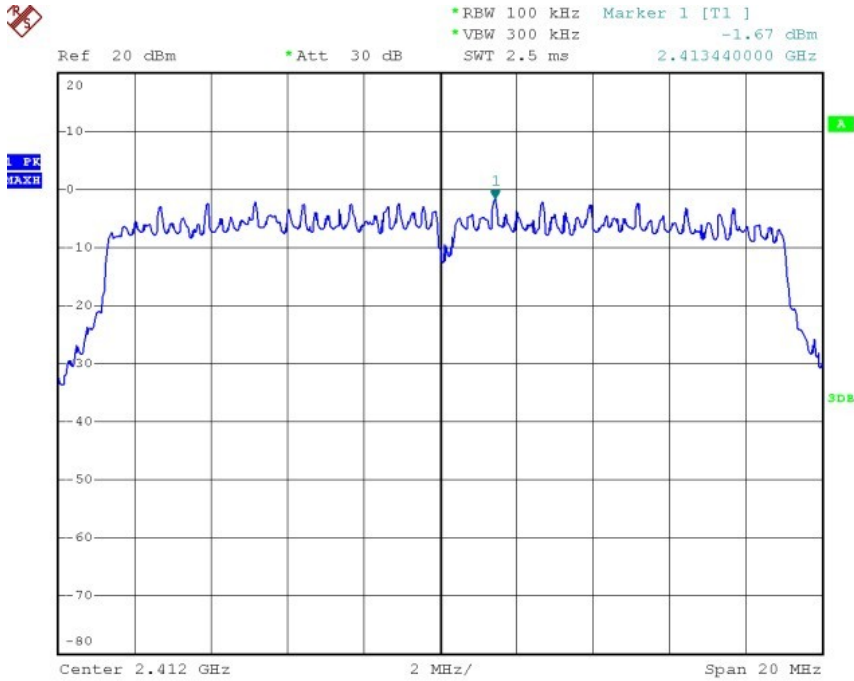

**Mid Channel: 2437MHz**

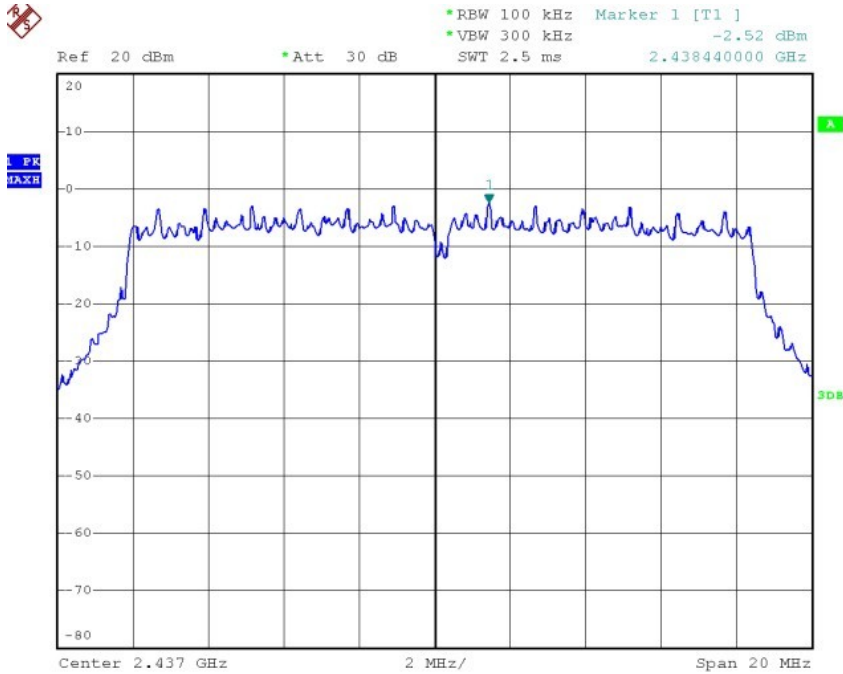


### High Channel: 2462MHz

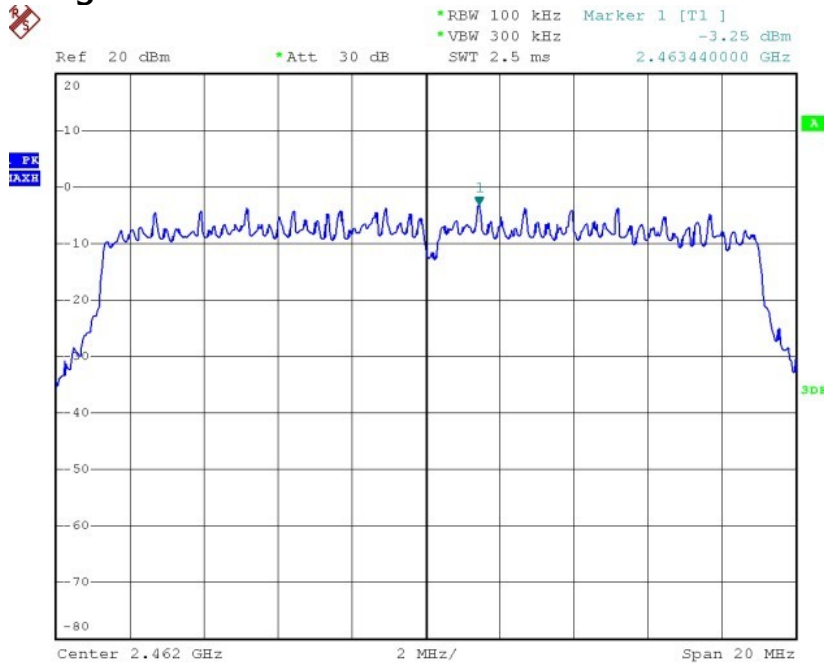


### For 802.11n HT40 Mode:


### Low Channel: 2422MHz

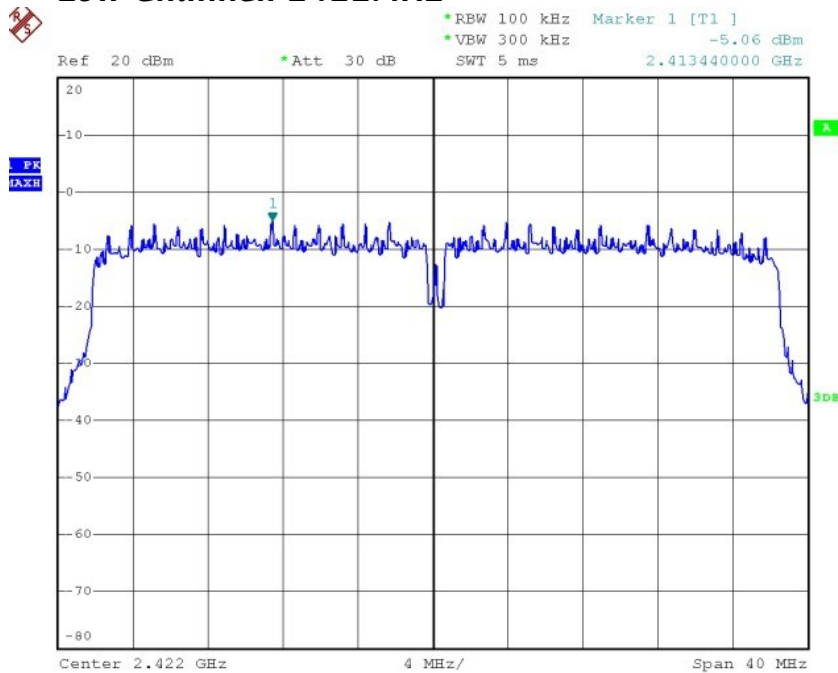

### Mid Channel: 2437MHz

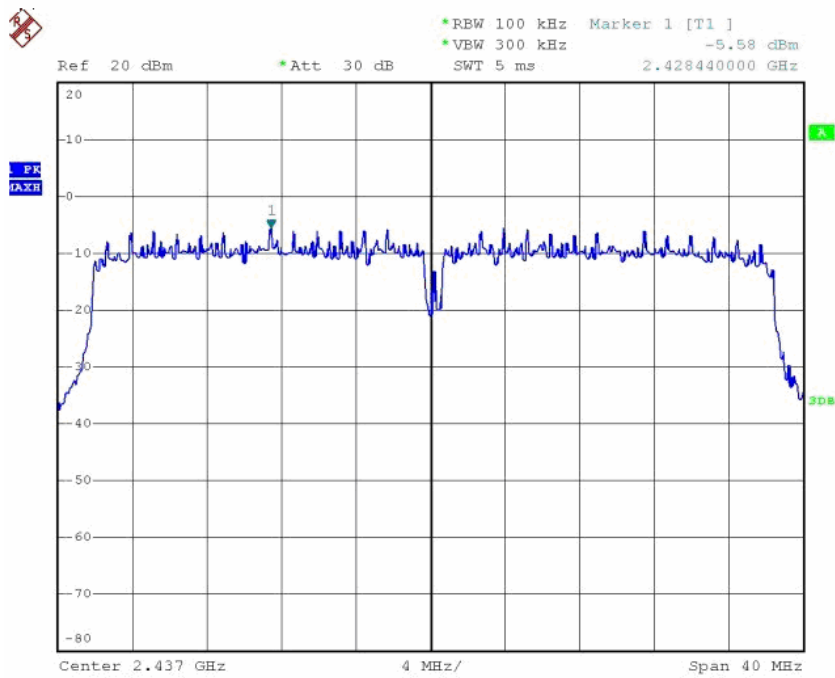

### High Channel: 2452MHz

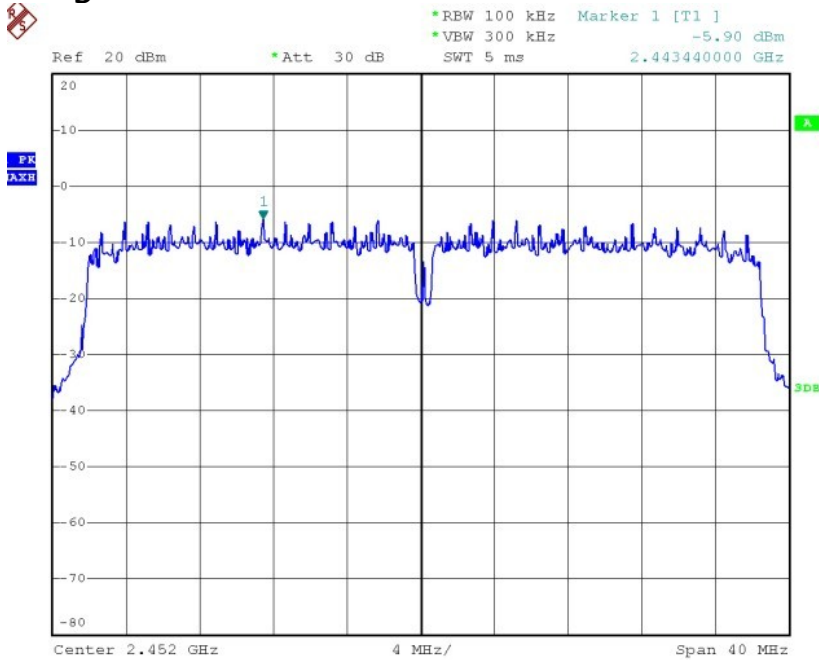

**Attachment: Test Set-Up Photograph**



***Conducted Emission Test Set-up***



***Radiated Emission Test Set-up -below 1GHz***



***Radiated Emission Test Set-up - Above 1GHz***