

## SAR Plots

**Plot: 1#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.24$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 802.11b Low/Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.62 W/kg


**Head Left Cheek/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.16 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.39 W/kg

**SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.566 W/kg**

Maximum value of SAR (measured) = 1.84 W/kg

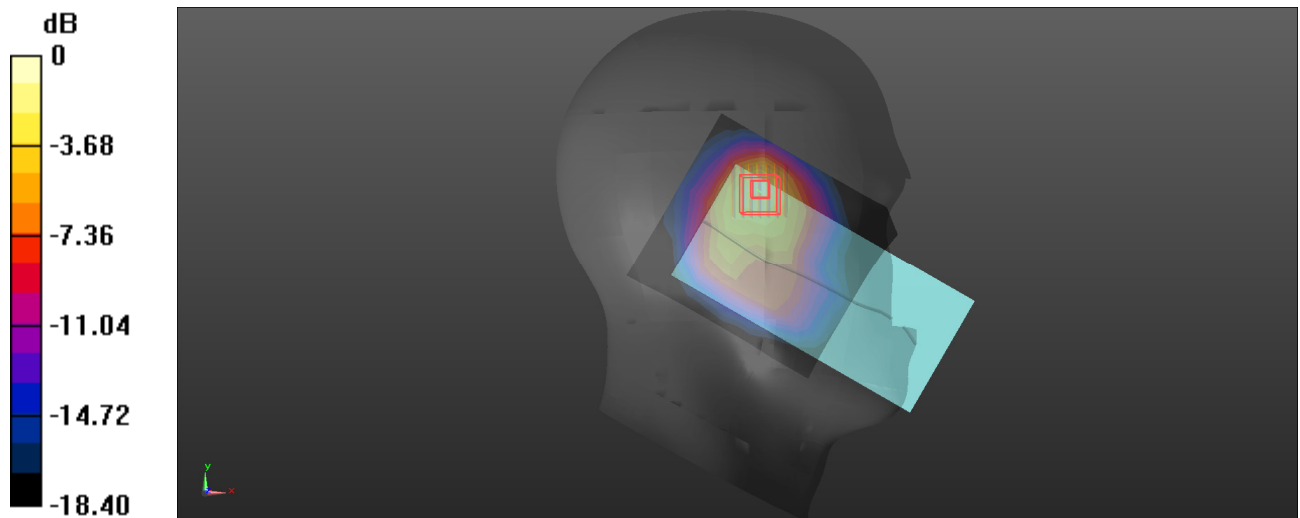

0 dB = 1.84 W/kg = 2.65 dBW/kg

**Plot: 2#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.144$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 802.11b Mid/Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.62 W/kg


**Head Left Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.03 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.46 W/kg

**SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.582 W/kg**

Maximum value of SAR (measured) = 1.92 W/kg

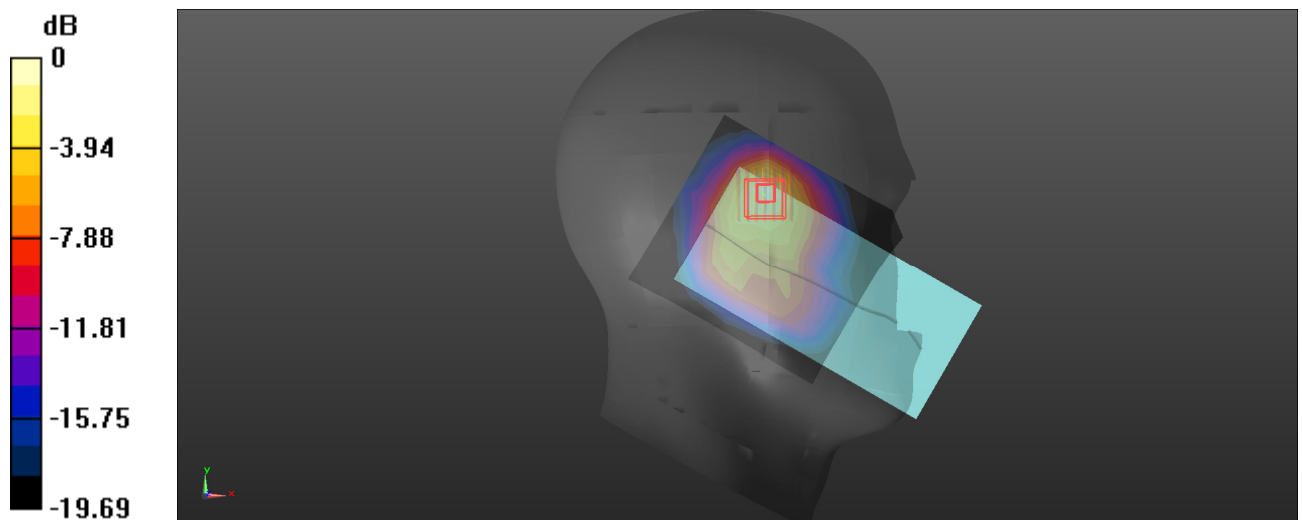

0 dB = 1.92 W/kg = 2.83 dBW/kg

**Plot: 3#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2462 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 1.79 \text{ S/m}$ ;  $\epsilon_r = 39.049$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2462 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 802.11b High/Area Scan (10x11x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.70 W/kg


**Head Left Cheek/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 18.28 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.53 W/kg

**SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.590 W/kg**

Maximum value of SAR (measured) = 1.95 W/kg

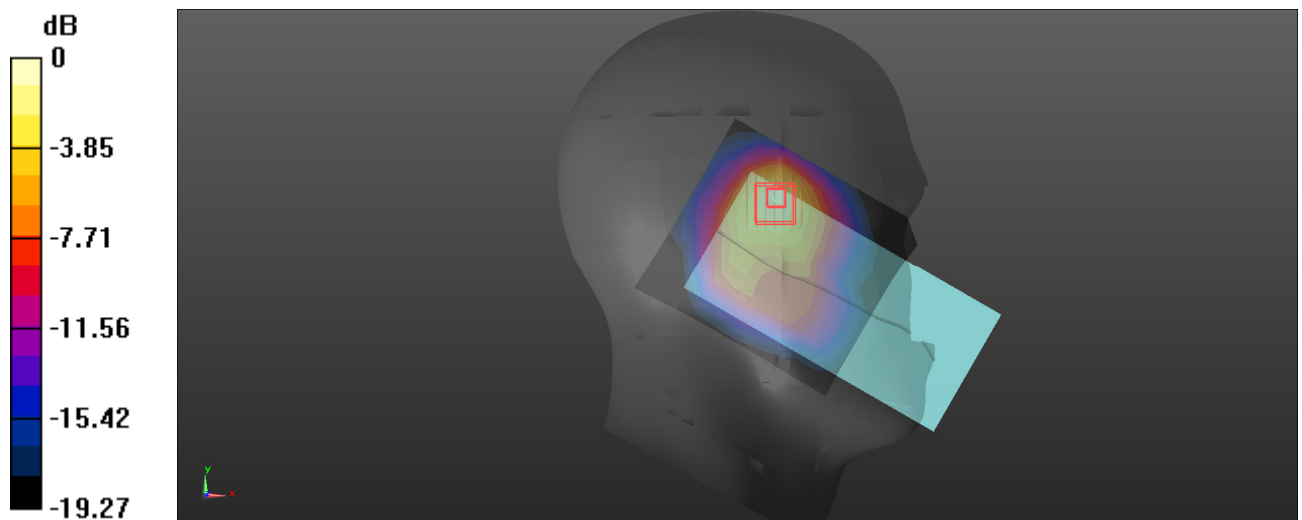

0 dB = 1.95 W/kg = 2.90 dBW/kg

**Plot: 4#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.144$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 802.11b Mid/Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.03 W/kg


**Head Left Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.01 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.330 W/kg**

Maximum value of SAR (measured) = 1.07 W/kg

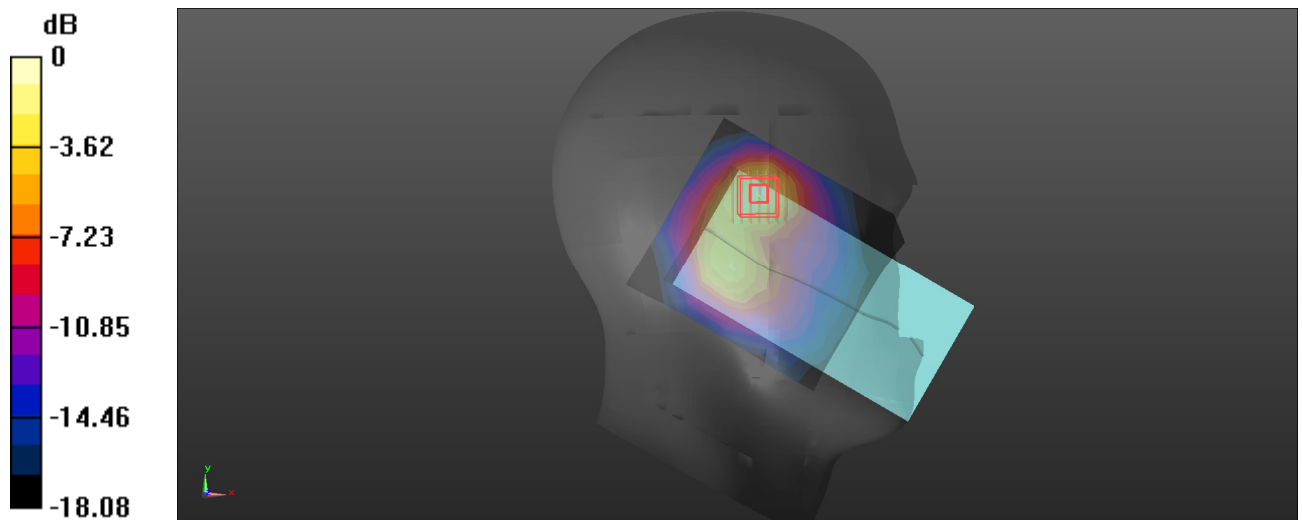

0 dB = 1.07 W/kg = 0.29 dBW/kg

**Plot: 5#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.144$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 802.11b Mid/Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.09 W/kg

**Head Right Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm,dz=5mm

Reference Value = 17.46 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.423 W/kg**

Maximum value of SAR (measured) = 1.14 W/kg

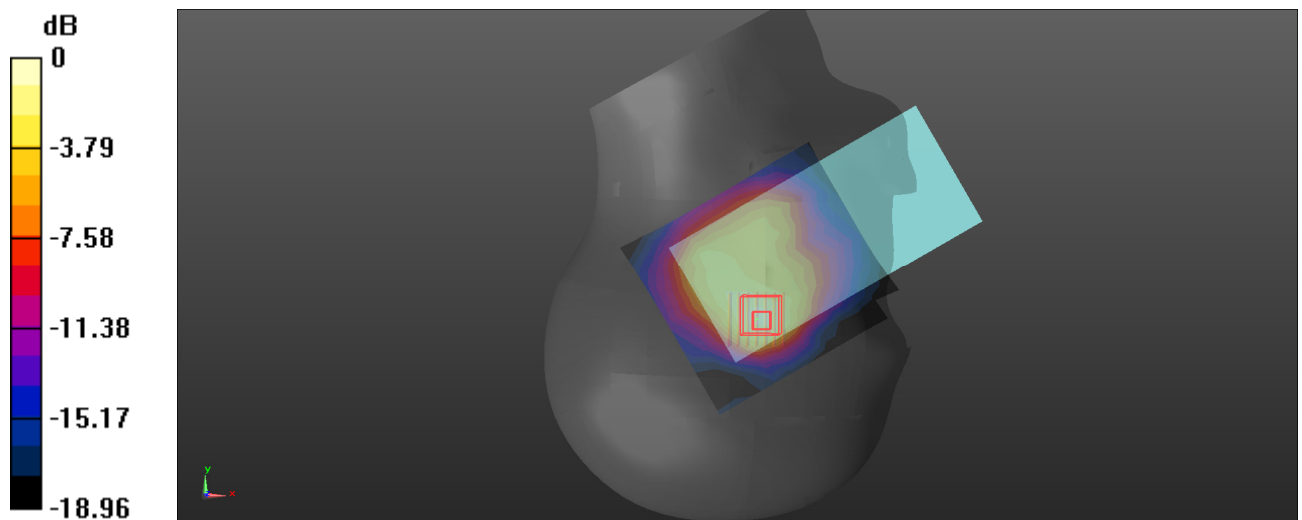

0 dB = 1.14 W/kg = 0.57 dBW/kg

**Plot: 6#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.144$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 802.11b Mid/Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.766 W/kg


**Head Right Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.36 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.314 W/kg**

Maximum value of SAR (measured) = 0.875 W/kg

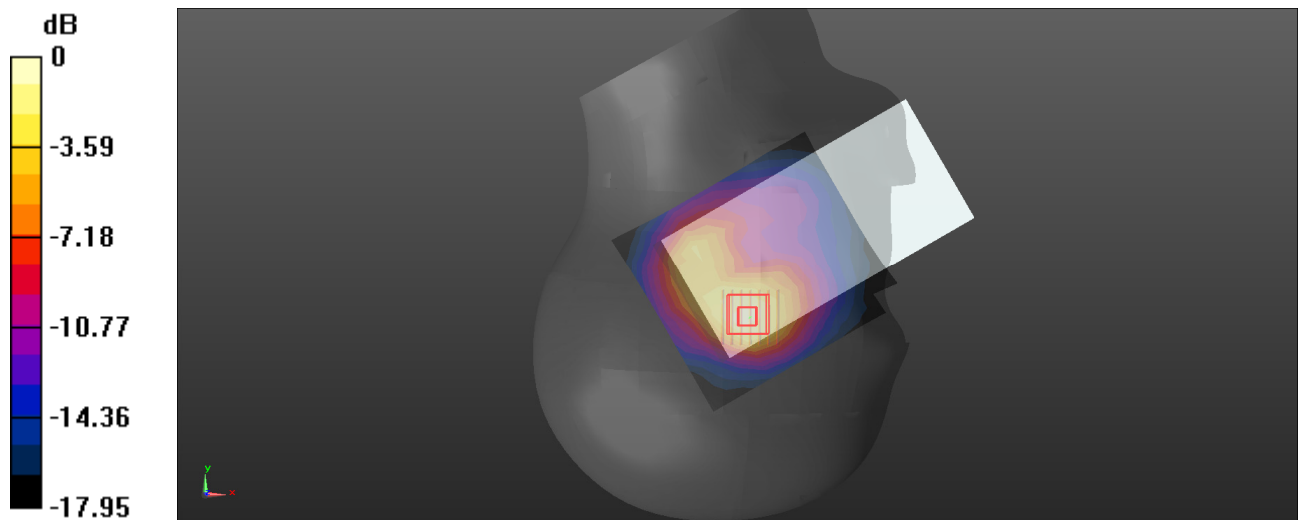

0 dB = 0.875 W/kg = -0.58 dBW/kg

**Plot: 7#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.144$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 802.11b Mid/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.403 W/kg


**Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.792 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.493 W/kg

**SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.160 W/kg**

Maximum value of SAR (measured) = 0.411 W/kg

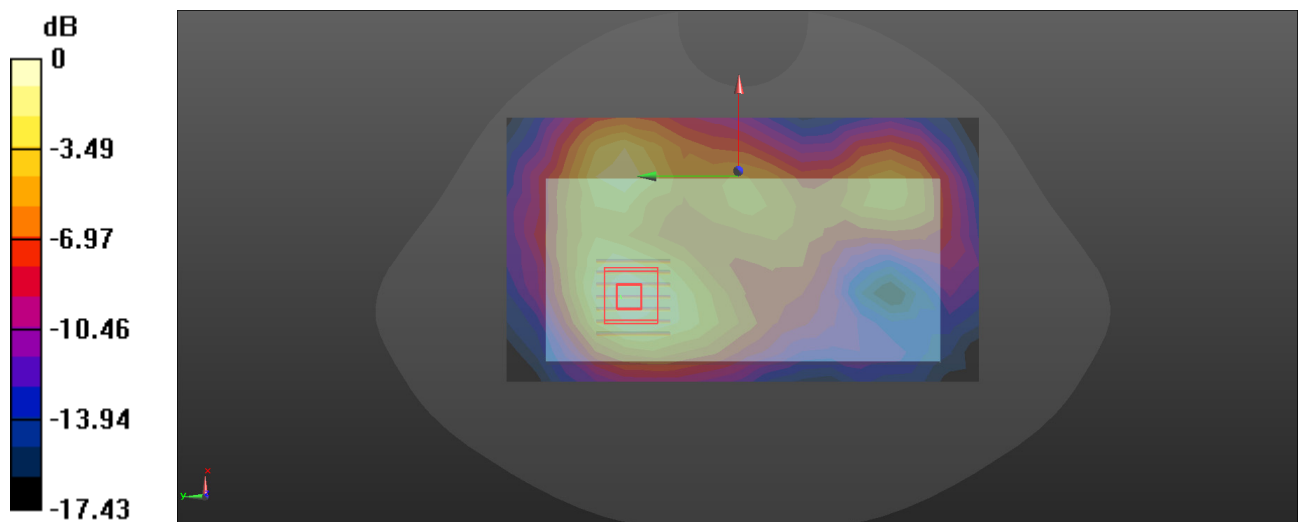

0 dB = 0.411 W/kg = -3.86 dBW/kg

**Plot: 8#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.714 \text{ S/m}$ ;  $\epsilon_r = 39.24$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 802.11b Low/Area Scan (10x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.472 W/kg


**Body Back/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.626 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 0.590 W/kg

**SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.161 W/kg**

Maximum value of SAR (measured) = 0.479 W/kg

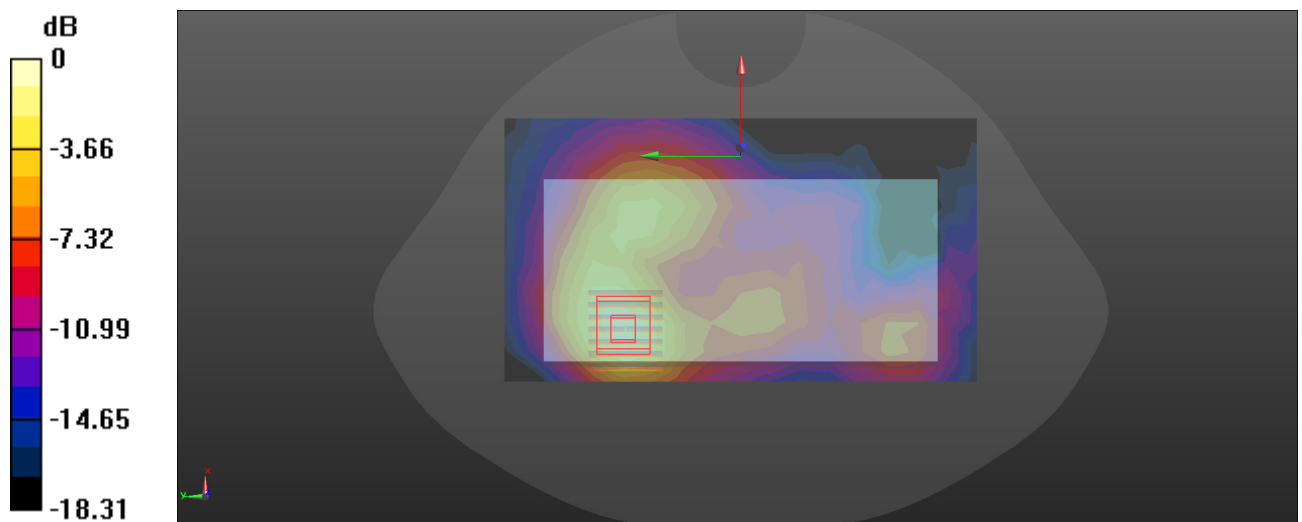

0 dB = 0.479 W/kg = -3.20 dBW/kg



**Plot: 9#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.144$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 802.11b Mid/Area Scan (10x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.578 W/kg


**Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.755 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.751 W/kg

**SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.206 W/kg**

Maximum value of SAR (measured) = 0.605 W/kg

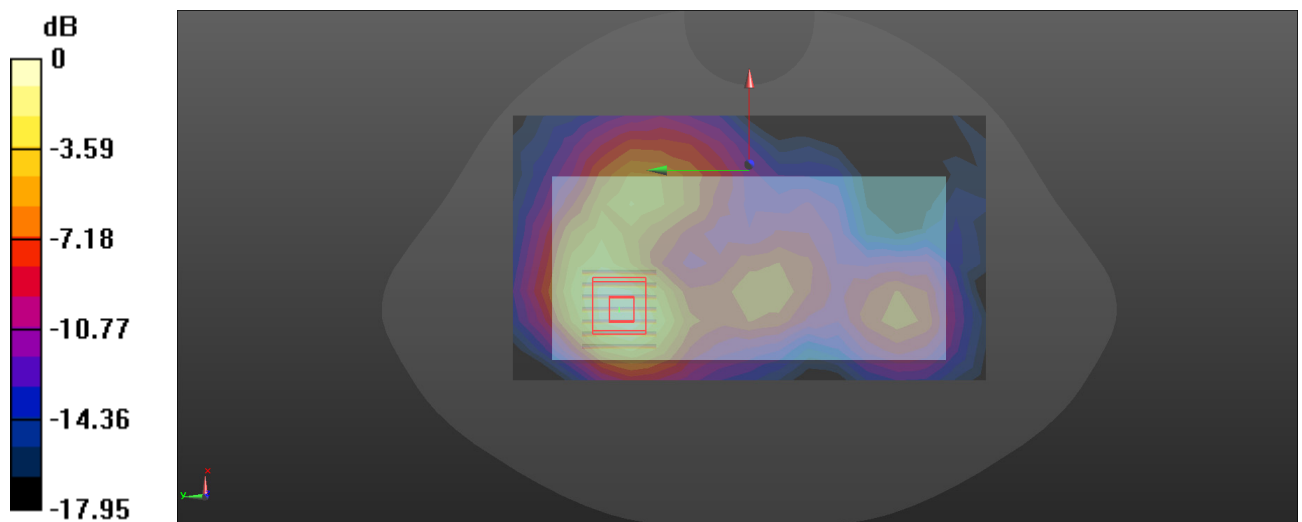

0 dB = 0.605 W/kg = -2.18 dBW/kg

**Plot: 10#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2462 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 1.79 \text{ S/m}$ ;  $\epsilon_r = 39.049$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2462 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 802.11b High/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.562 W/kg


**Body Back/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.658 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 0.732 W/kg

**SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 0.589 W/kg

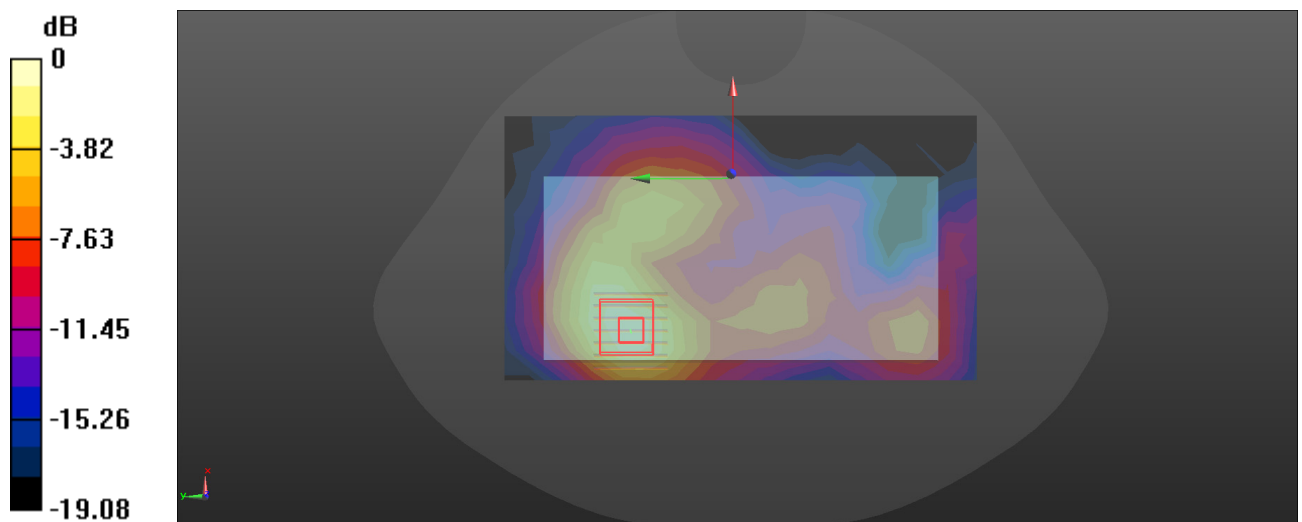

0 dB = 0.589 W/kg = -2.30 dBW/kg

**Plot: 11#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.144$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Right/WLAN 802.11b Mid/Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.479 W/kg


**Body Right/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.01 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.613 W/kg

**SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.165 W/kg**

Maximum value of SAR (measured) = 0.494 W/kg

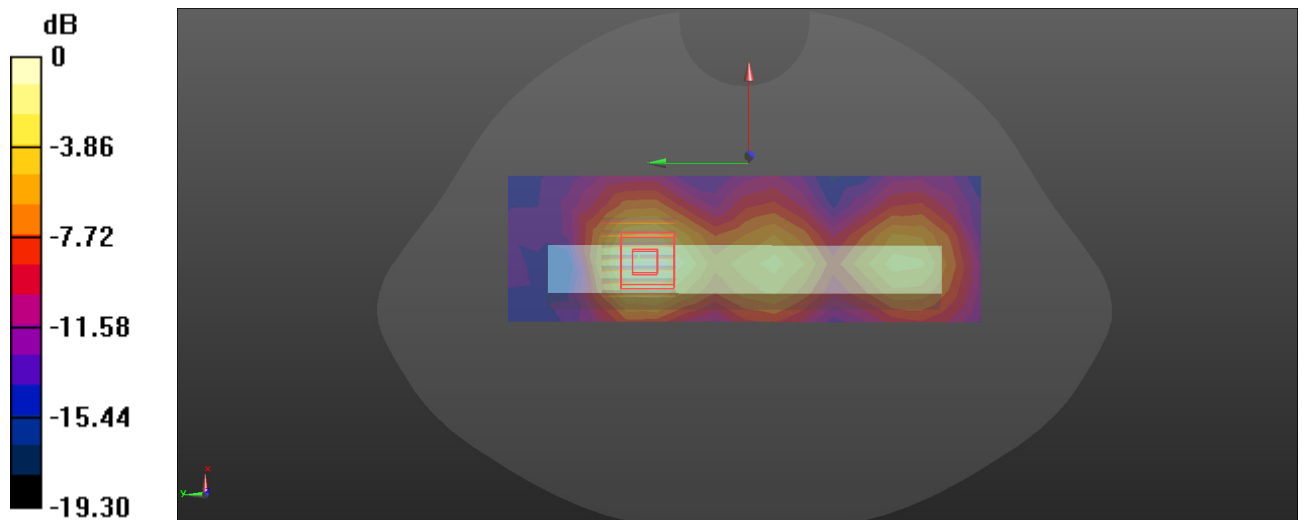

0 dB = 0.494 W/kg = -3.06 dBW/kg

**Plot: 12#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.144$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Top/WLAN 802.11b Mid/Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.372 W/kg


**Body Top/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.73 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.469 W/kg

**SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.130 W/kg**

Maximum value of SAR (measured) = 0.376 W/kg

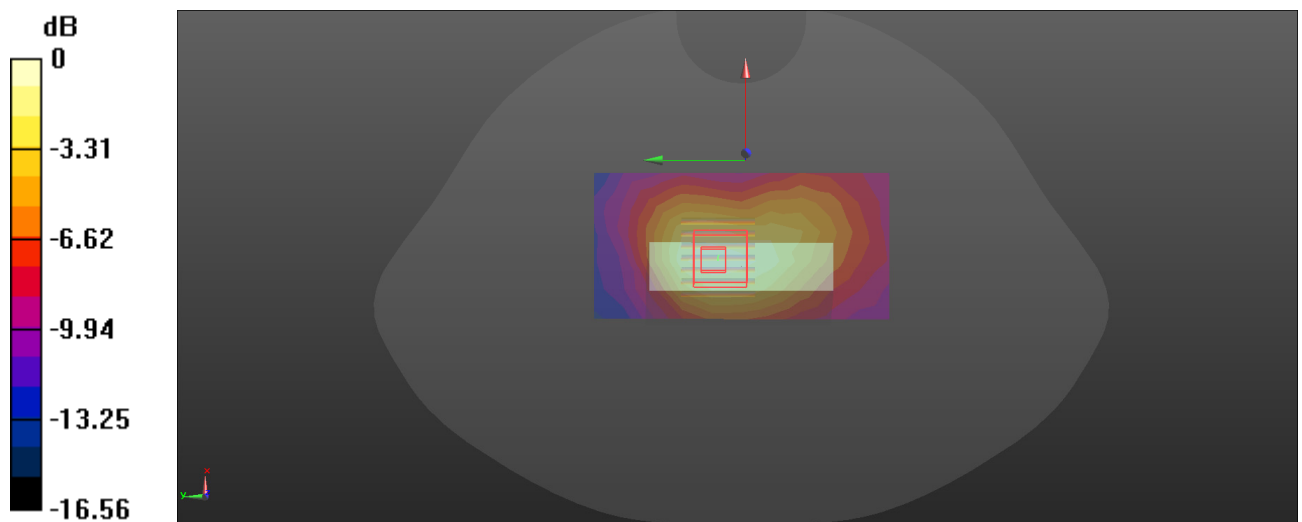

0 dB = 0.376 W/kg = -4.25 dBW/kg

**Plot: 13#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 4.633 \text{ S/m}$ ;  $\epsilon_r = 34.657$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.2G 802.11ac20 Low/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.58 W/kg

**Head Left Cheek/WLAN 5.2G 802.11ac20 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 3.012 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.76 W/kg

**SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.347 W/kg**

Maximum value of SAR (measured) = 1.93 W/kg

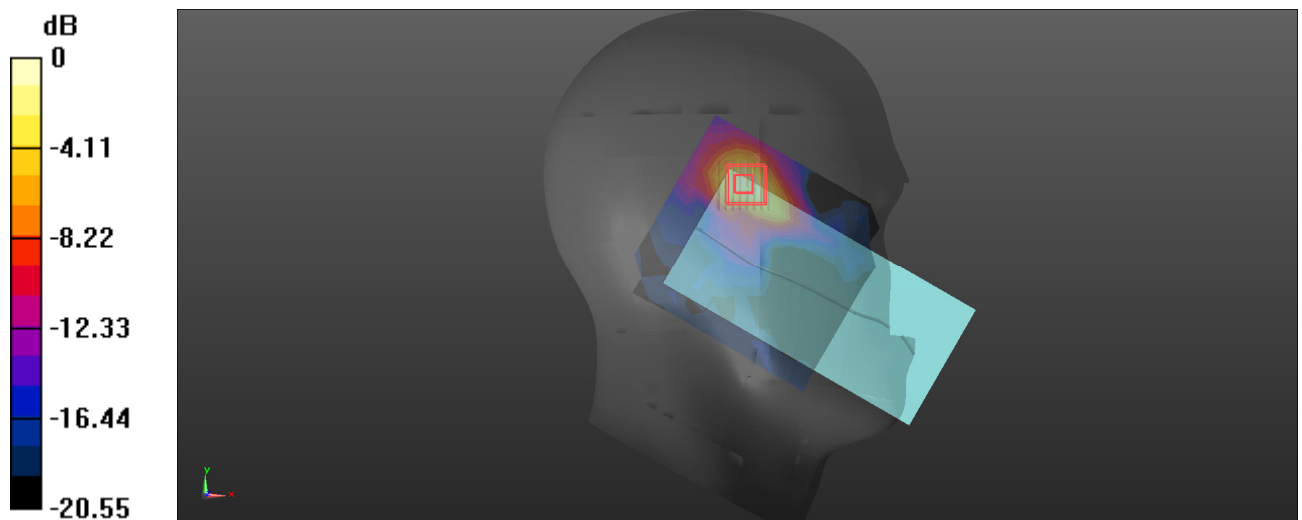

0 dB = 1.93 W/kg = 2.86 dBW/kg

**Plot: 14#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 34.638$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.2G 802.11ac20 Mid/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.50 W/kg

**Head Left Cheek/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 4.904 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.59 W/kg

**SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.353 W/kg**

Maximum value of SAR (measured) = 1.83 W/kg

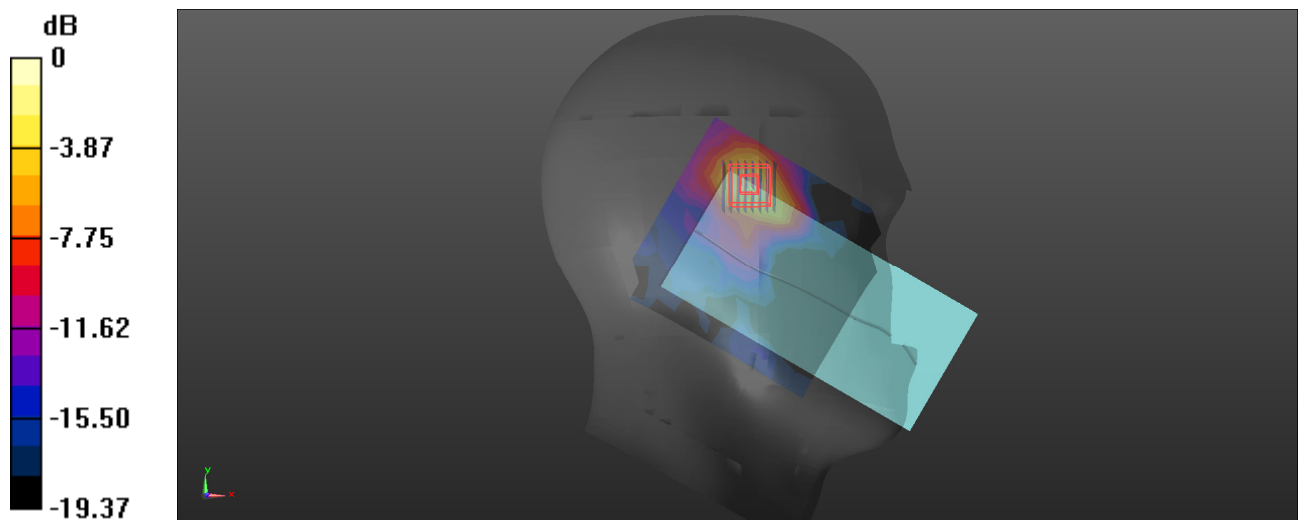

0 dB = 1.83 W/kg = 2.62 dBW/kg

**Plot: 15#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 4.703 \text{ S/m}$ ;  $\epsilon_r = 34.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5240 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.2G 802.11ac20 High/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.66 W/kg

**Head Left Cheek/WLAN 5.2G 802.11ac20 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 4.578 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.88 W/kg

**SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.374 W/kg**

Maximum value of SAR (measured) = 1.98 W/kg

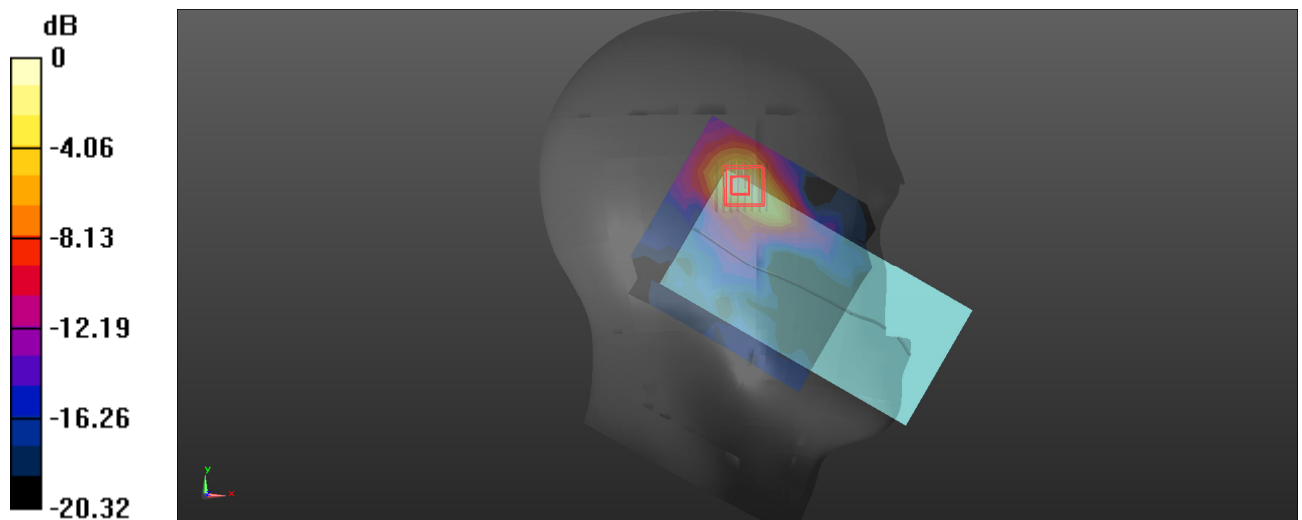

0 dB = 1.98 W/kg = 2.97 dBW/kg

**Plot: 16#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 4.633 \text{ S/m}$ ;  $\epsilon_r = 34.657$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.2G 802.11ac20 Low/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.63 W/kg


**Head Left Tilt/WLAN 5.2G 802.11ac20 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 4.808 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.47 W/kg

**SAR(1 g) = 0.907 W/kg; SAR(10 g) = 0.329 W/kg**

Maximum value of SAR (measured) = 1.80 W/kg

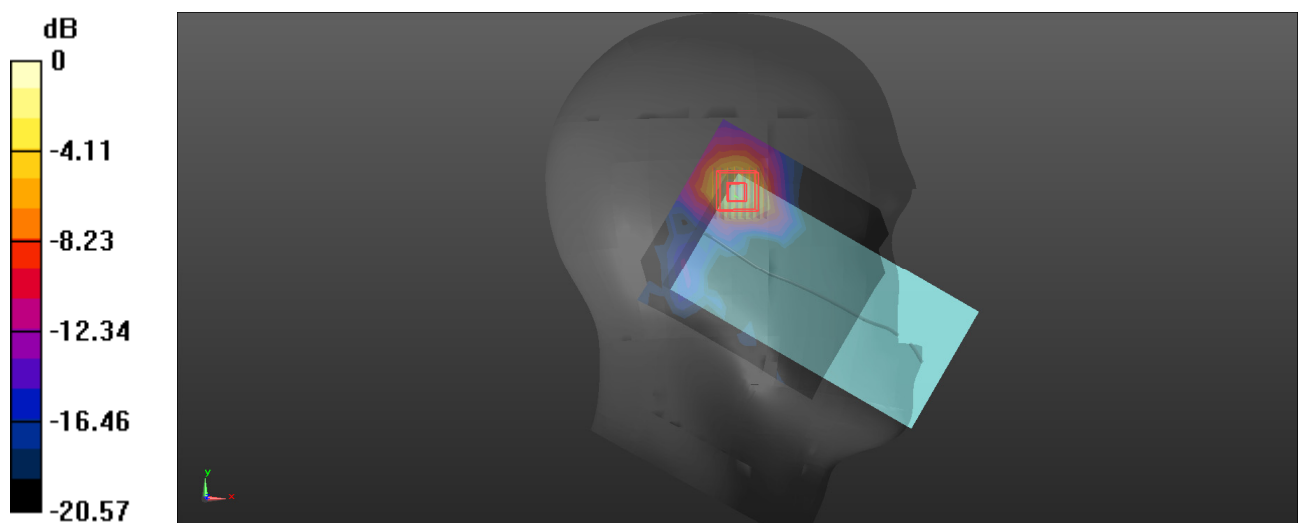

0 dB = 1.80 W/kg = 2.55 dBW/kg



**Plot: 17#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 34.638$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.2G 802.11ac20 Mid/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.51 W/kg


**Head Left Tilt/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.135 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.22 W/kg

**SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.287 W/kg**

Maximum value of SAR (measured) = 1.59 W/kg

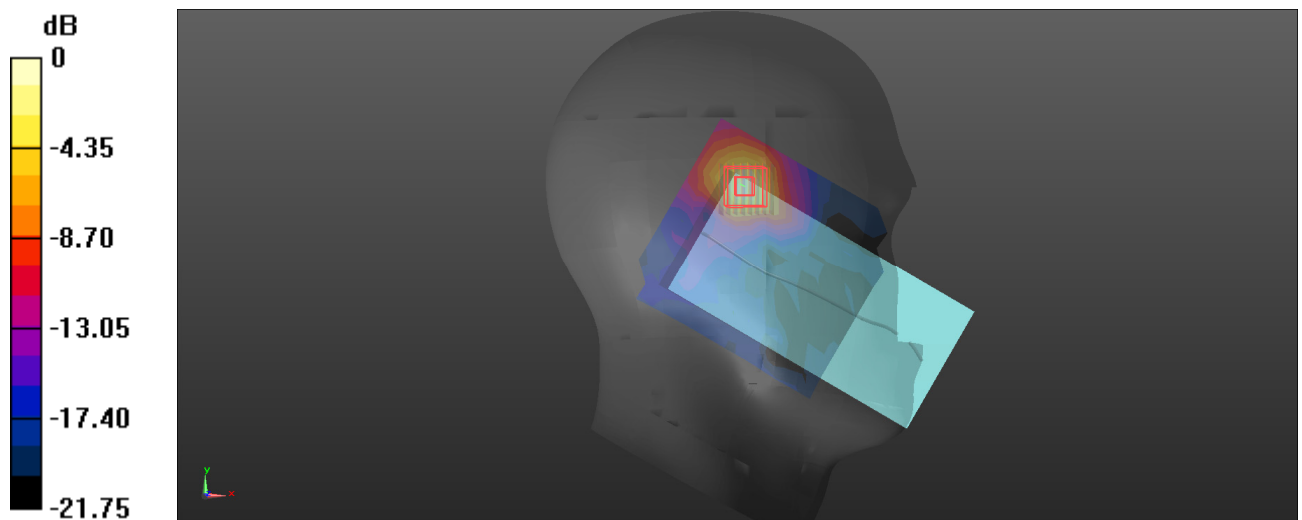

0 dB = 1.59 W/kg = 2.01 dBW/kg

**Plot: 18#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 4.703 \text{ S/m}$ ;  $\epsilon_r = 34.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5240 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.2G 802.11ac20 High/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.56 W/kg


**Head Left Tilt/WLAN 5.2G 802.11ac20 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.932 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.31 W/kg

**SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.325 W/kg**

Maximum value of SAR (measured) = 1.62 W/kg

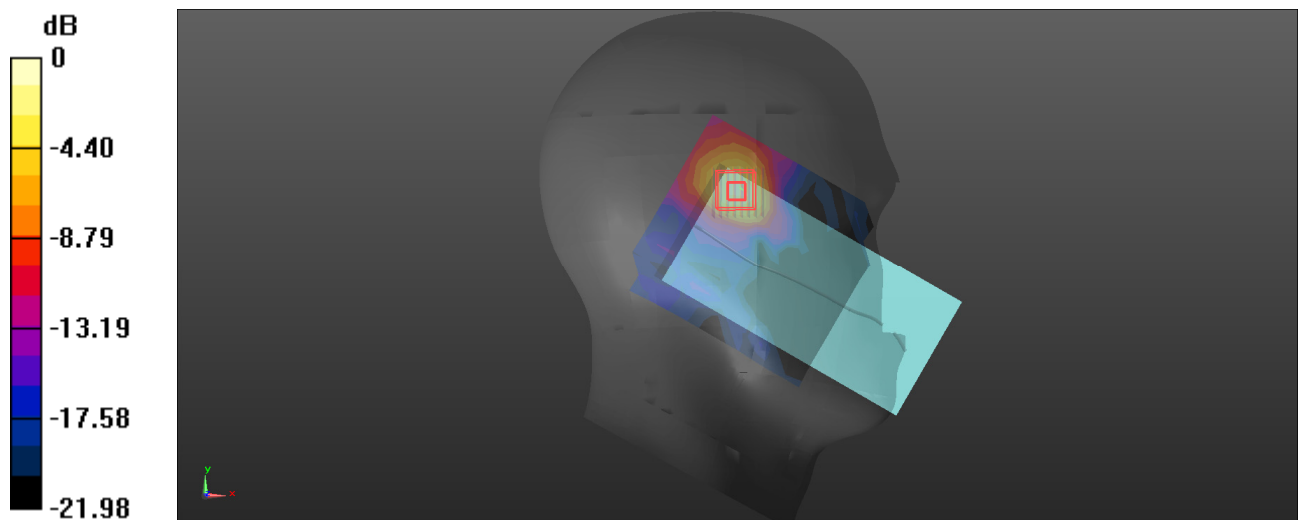

0 dB = 1.62 W/kg = 2.10 dBW/kg

**Plot: 19#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 34.638$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.2G 802.11ac20 Mid/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.14 W/kg

**Head Right Cheek/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 3.478 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.16 W/kg

**SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.228 W/kg**

Maximum value of SAR (measured) = 1.44 W/kg

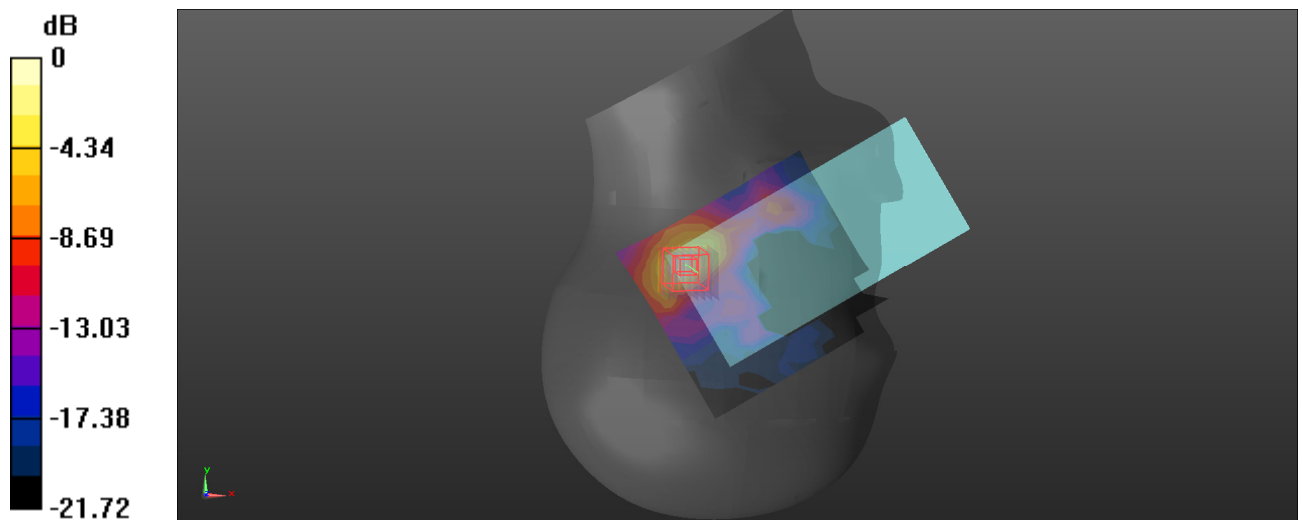

0 dB = 1.44 W/kg = 1.58 dBW/kg

**Plot: 20#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 34.638$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 5.2G 802.11ac20 Mid/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.906 W/kg


**Head Right Tilt/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 3.973 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.179 W/kg**

Maximum value of SAR (measured) = 0.983 W/kg

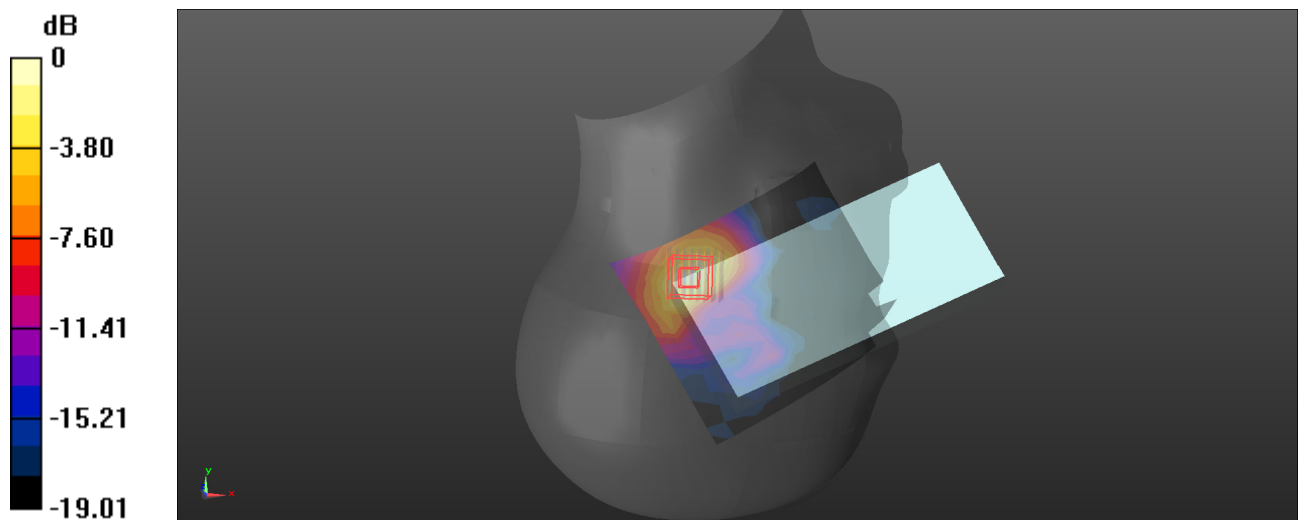

0 dB = 0.983 W/kg = -0.07 dBW/kg

**Plot: 21#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 34.638$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 5.2G 802.11ac20 Mid/Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.646 W/kg


**Body Front/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.5660 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.681 W/kg

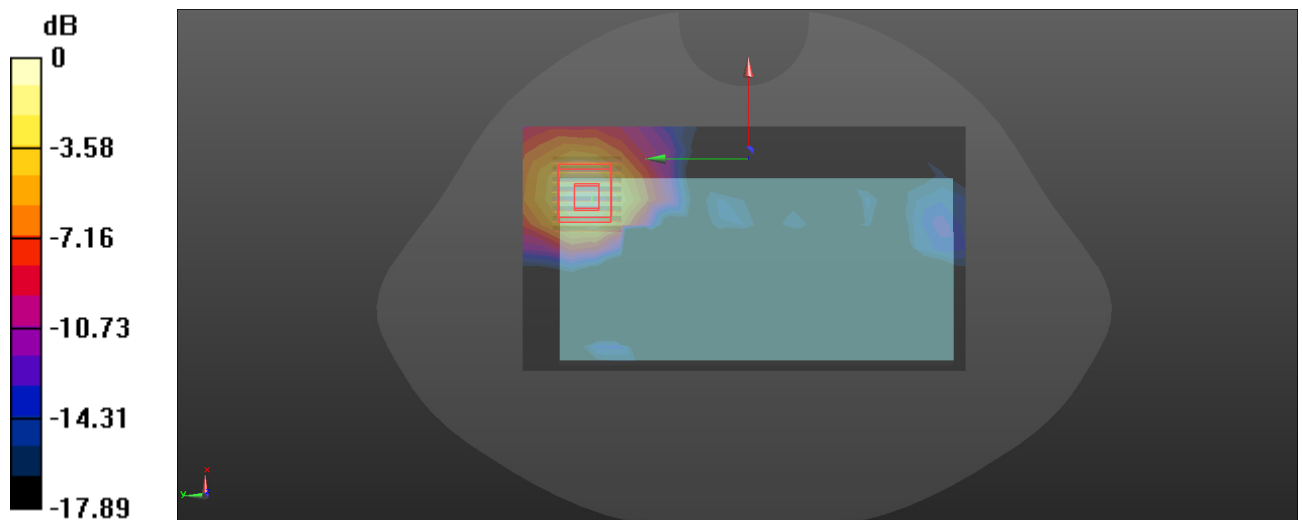

0 dB = 0.681 W/kg = -1.67 dBW/kg

**Plot: 22#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 4.633 \text{ S/m}$ ;  $\epsilon_r = 34.657$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.2G 802.11ac20 Low/Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.01 W/kg


**Body Back/WLAN 5.2G 802.11ac20 Low /Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.638 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.201 W/kg**

Maximum value of SAR (measured) = 1.03 W/kg

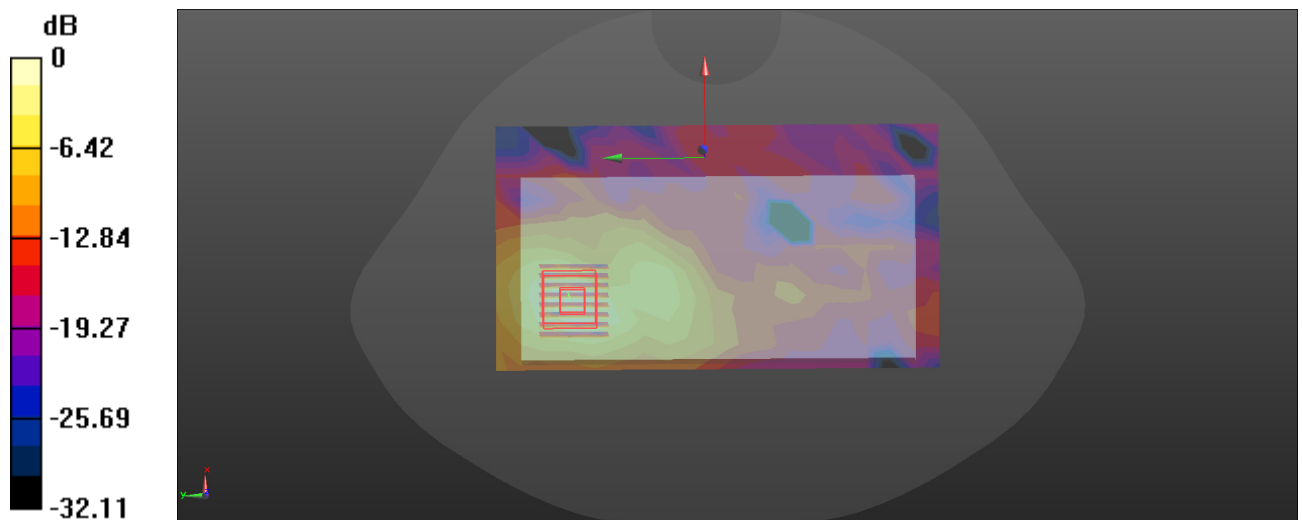

0 dB = 1.03 W/kg = 0.13 dBW/kg

**Plot: 23#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 34.638$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.2G 802.11ac20 Mid/Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.06 W/kg


**Body Back/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.150 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.72 W/kg

**SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.228 W/kg**

Maximum value of SAR (measured) = 1.20 W/kg

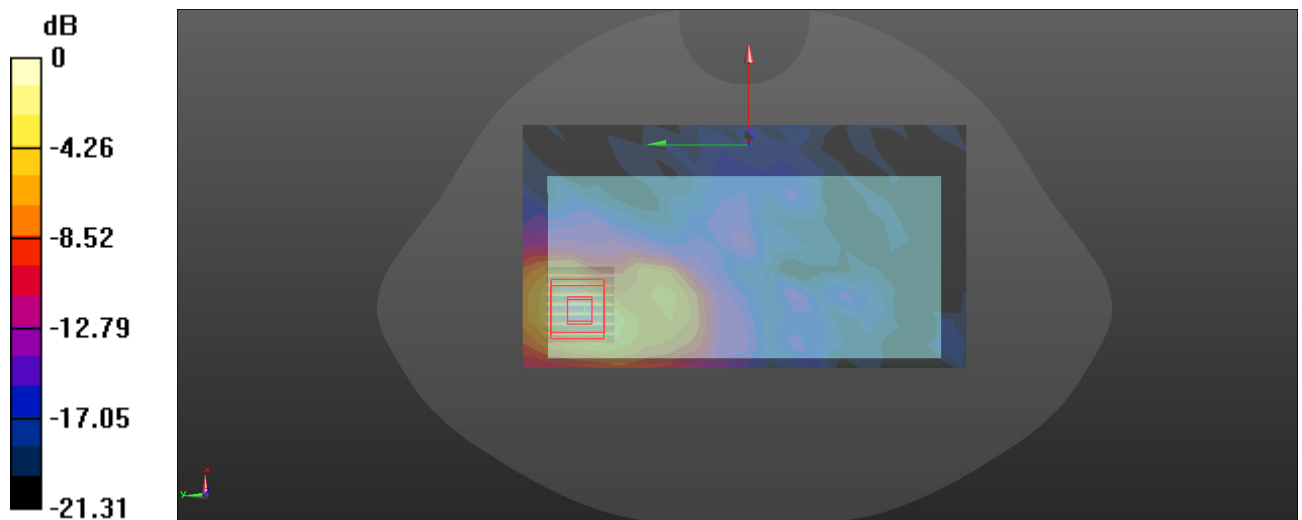

0 dB = 1.20 W/kg = 0.79 dBW/kg

**Plot: 24#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 4.703 \text{ S/m}$ ;  $\epsilon_r = 34.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5240 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.2G 802.11ac20 High/Area Scan (11x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.01 W/kg


**Body Back/WLAN 5.2G 802.11ac20 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 2.381 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.237 W/kg**

Maximum value of SAR (measured) = 1.20 W/kg

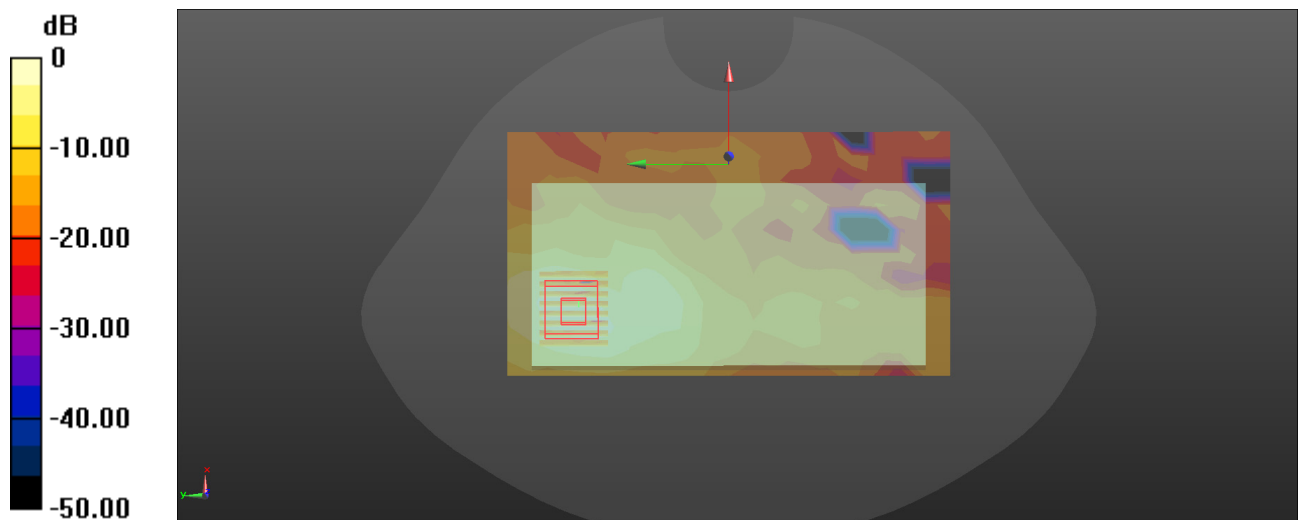

0 dB = 1.20 W/kg = 0.79 dBW/kg



**Plot: 25#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 34.638$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Right/WLAN 5.2G 802.11ac20 Mid/Area Scan (7x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.497 W/kg


**Body Right/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 5.789 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.793 W/kg

**SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.108 W/kg**

Maximum value of SAR (measured) = 0.501 W/kg

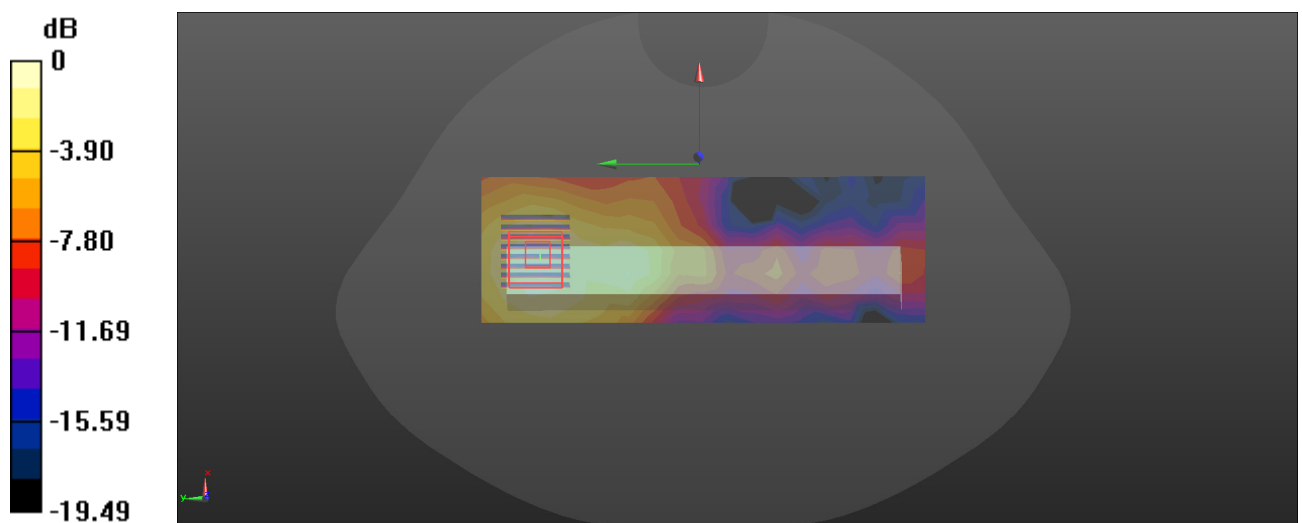

0 dB = 0.501 W/kg = -3.00 dBW/kg

**Plot: 26#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.031

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.656 \text{ S/m}$ ;  $\epsilon_r = 34.638$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Top/WLAN 5.2G 802.11ac20 Mid/Area Scan (7x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.784 W/kg


**Body Top/WLAN 5.2G 802.11ac20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.702 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.165 W/kg**

Maximum value of SAR (measured) = 0.808 W/kg

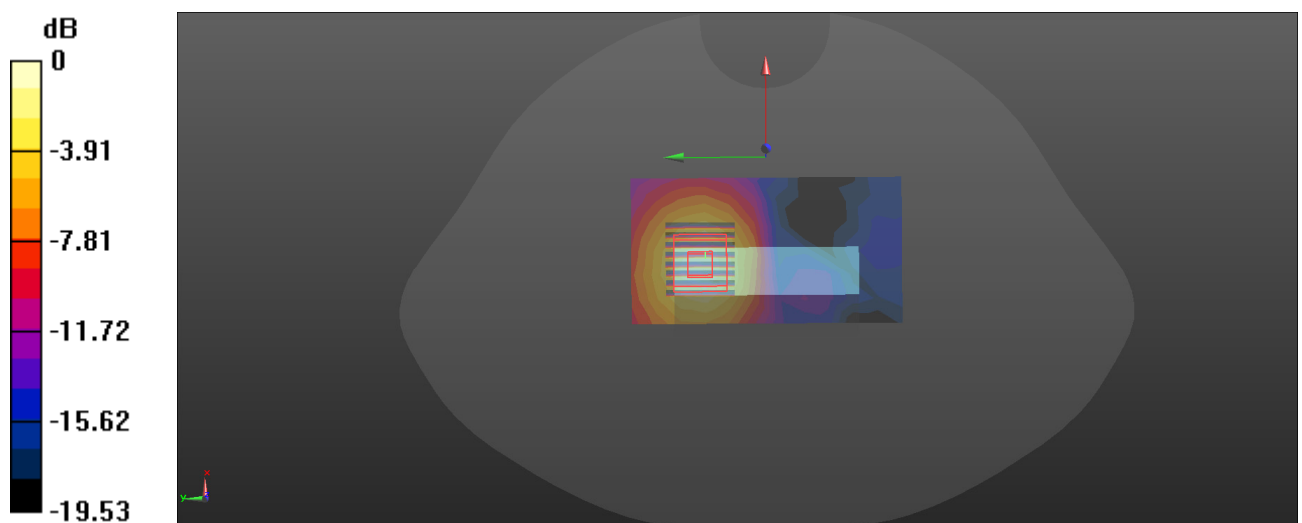

0 dB = 0.808 W/kg = -0.93 dBW/kg

**Plot: 27#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5260 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5260 \text{ MHz}$ ;  $\sigma = 4.727 \text{ S/m}$ ;  $\epsilon_r = 34.581$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5260 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.3G 802.11ax20 Low/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.89 W/kg

**Head Left Cheek/WLAN 5.3G 802.11ax20 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 5.802 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.89 W/kg

**SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.356 W/kg**

Maximum value of SAR (measured) = 1.95 W/kg

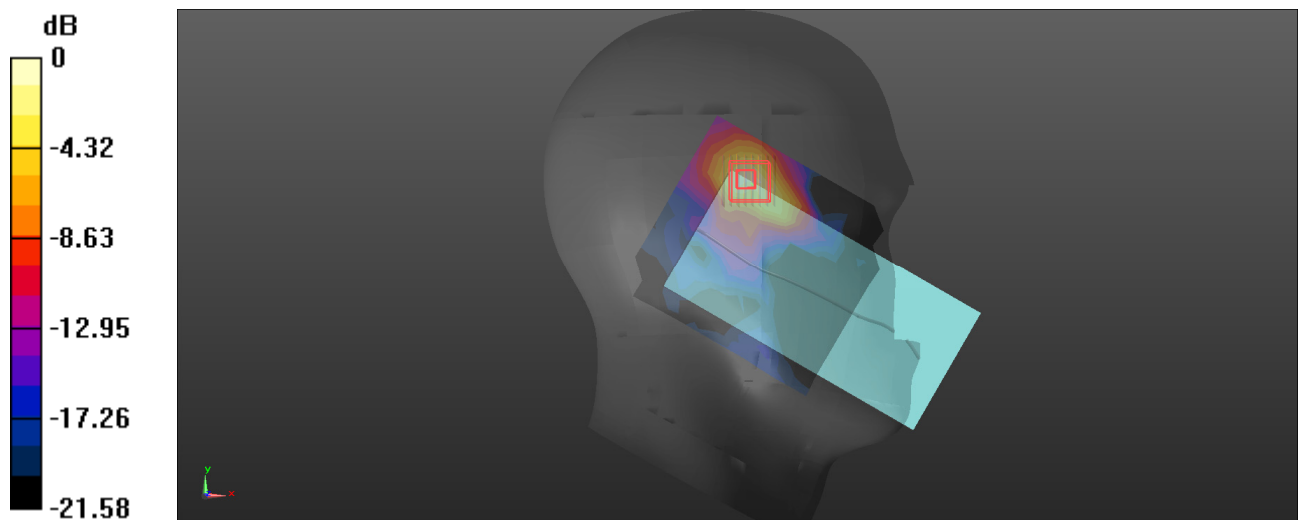

0 dB = 1.95 W/kg = 2.90 dBW/kg

**Plot: 28#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.75 \text{ S/m}$ ;  $\epsilon_r = 34.562$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.3G 802.11ax20 Mid/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.13 W/kg

**Head Left Cheek/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 6.638 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.31 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.406 W/kg**

Maximum value of SAR (measured) = 2.25 W/kg

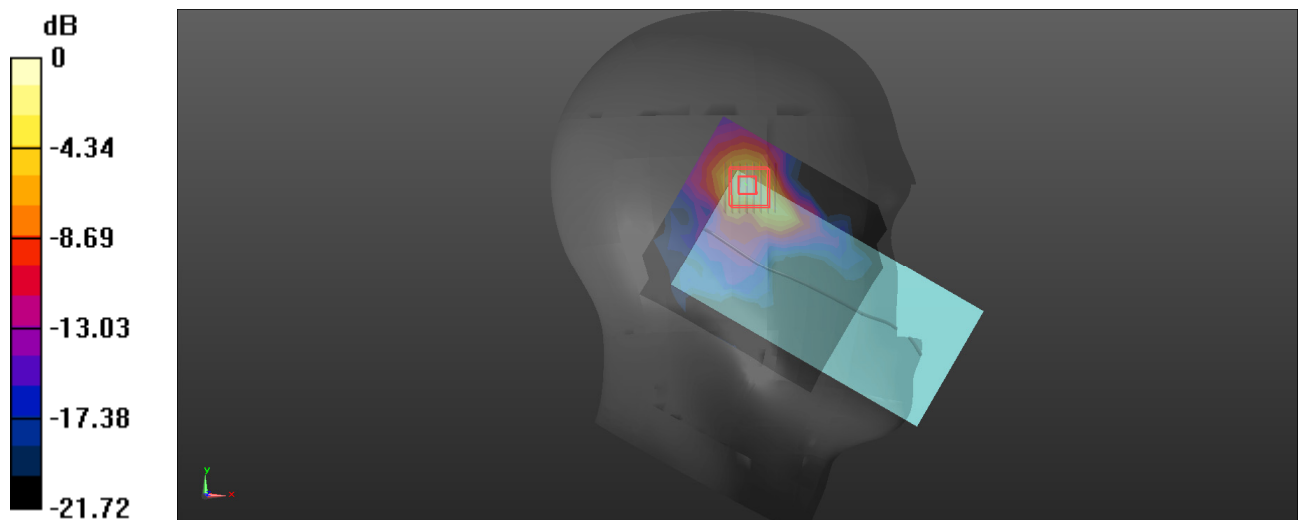

0 dB = 2.25 W/kg = 3.52 dBW/kg

**Plot: 29#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5320 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5320 \text{ MHz}$ ;  $\sigma = 4.797 \text{ S/m}$ ;  $\epsilon_r = 34.524$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5320 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.3G 802.11ax20 High/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.30 W/kg

**Head Left Cheek/WLAN 5.3G 802.11ax20 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,


$dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 7.192 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 3.56 W/kg

**SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.445 W/kg**

Maximum value of SAR (measured) = 2.48 W/kg

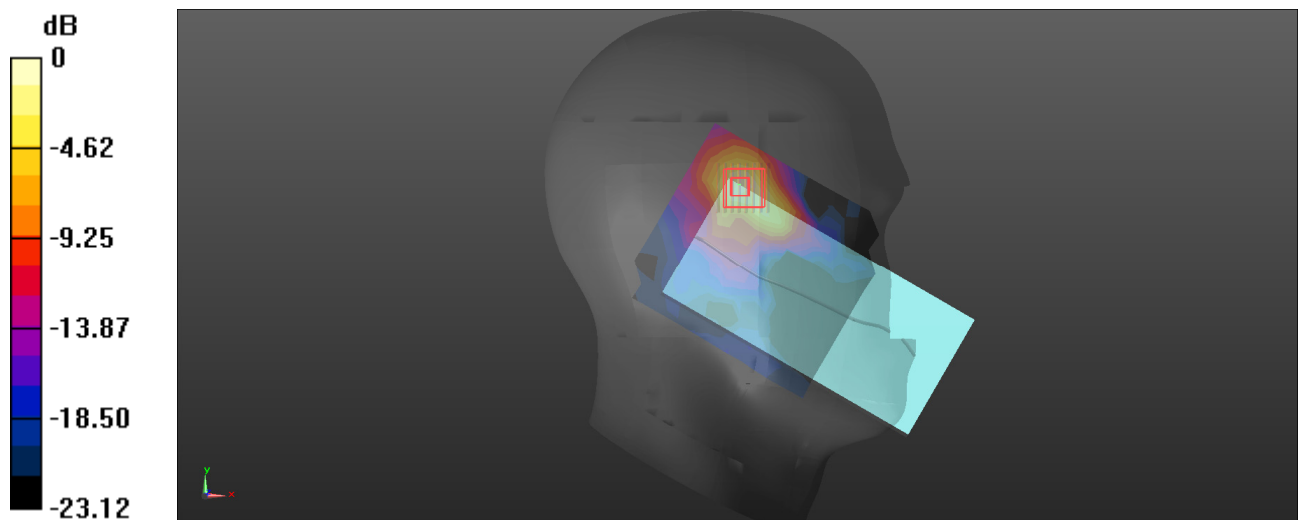

0 dB = 2.48 W/kg = 3.94 dBW/kg

**Plot: 30#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5260 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5260 \text{ MHz}$ ;  $\sigma = 4.727 \text{ S/m}$ ;  $\epsilon_r = 34.581$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5260 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.3G 802.11ax20 Low/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.50 W/kg


**Head Left Tilt/WLAN 5.3G 802.11ax20 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 4.952 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.55 W/kg

**SAR(1 g) = 0.870 W/kg; SAR(10 g) = 0.309 W/kg**

Maximum value of SAR (measured) = 1.82 W/kg

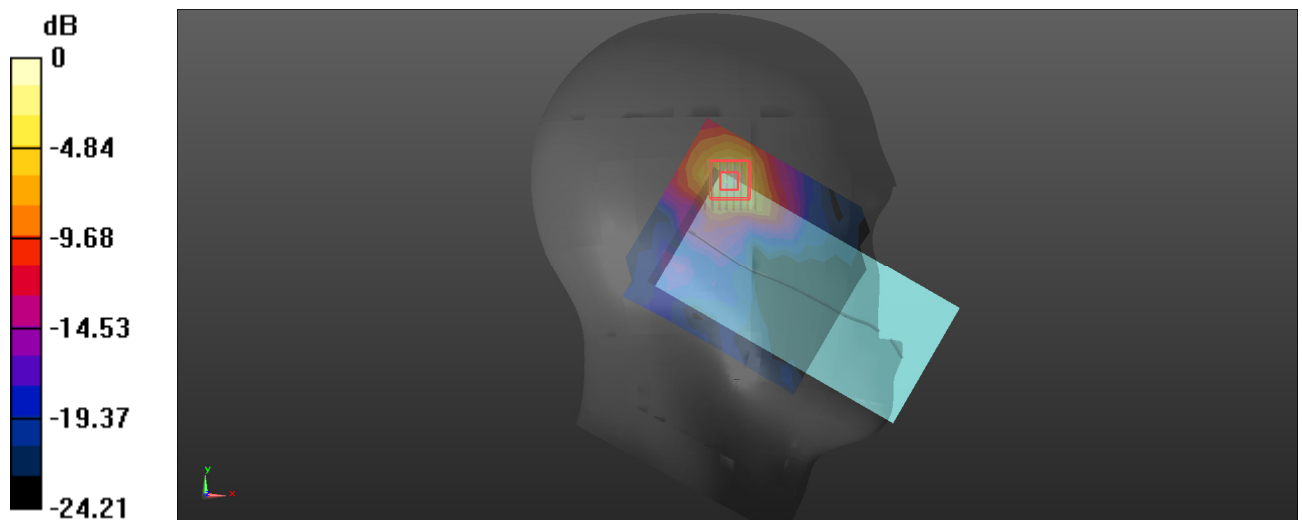

0 dB = 1.82 W/kg = 2.60 dBW/kg

**Plot: 31#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.75 \text{ S/m}$ ;  $\epsilon_r = 34.562$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.3G 802.11ax20 Mid/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.48 W/kg


**Head Left Tilt/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.273 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.50 W/kg

**SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.305 W/kg**

Maximum value of SAR (measured) = 1.79 W/kg

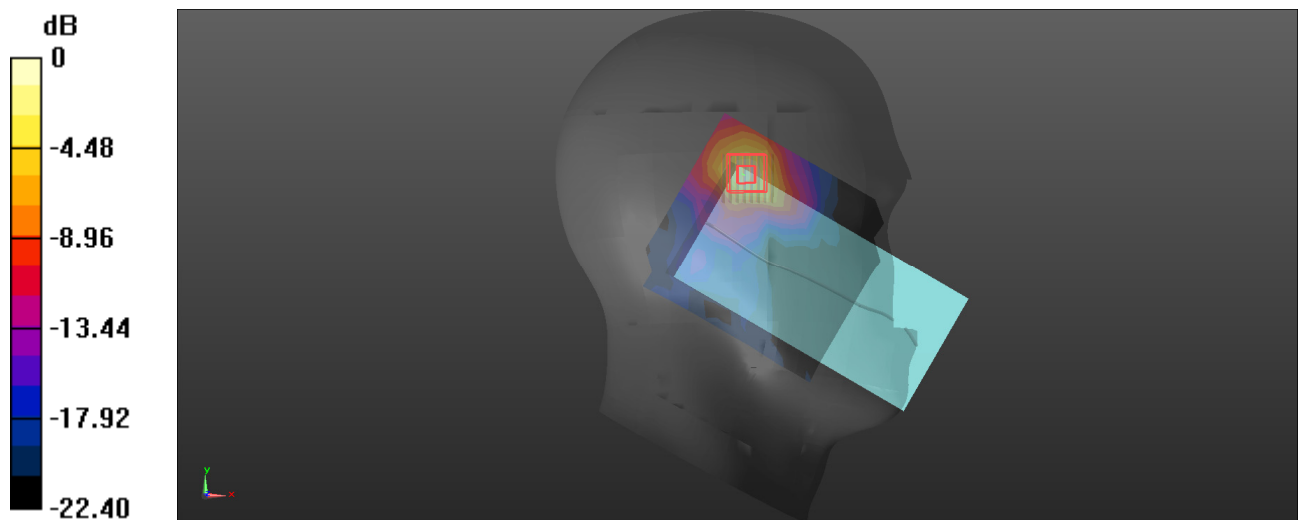

0 dB = 1.79 W/kg = 2.53 dBW/kg

**Plot: 32#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5320 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5320 \text{ MHz}$ ;  $\sigma = 4.797 \text{ S/m}$ ;  $\epsilon_r = 34.524$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5320 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.3G 802.11ax20 High/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.72 W/kg


**Head Left Tilt/WLAN 5.3G 802.11ax20 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 5.834 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.76 W/kg

**SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.348 W/kg**

Maximum value of SAR (measured) = 1.96 W/kg

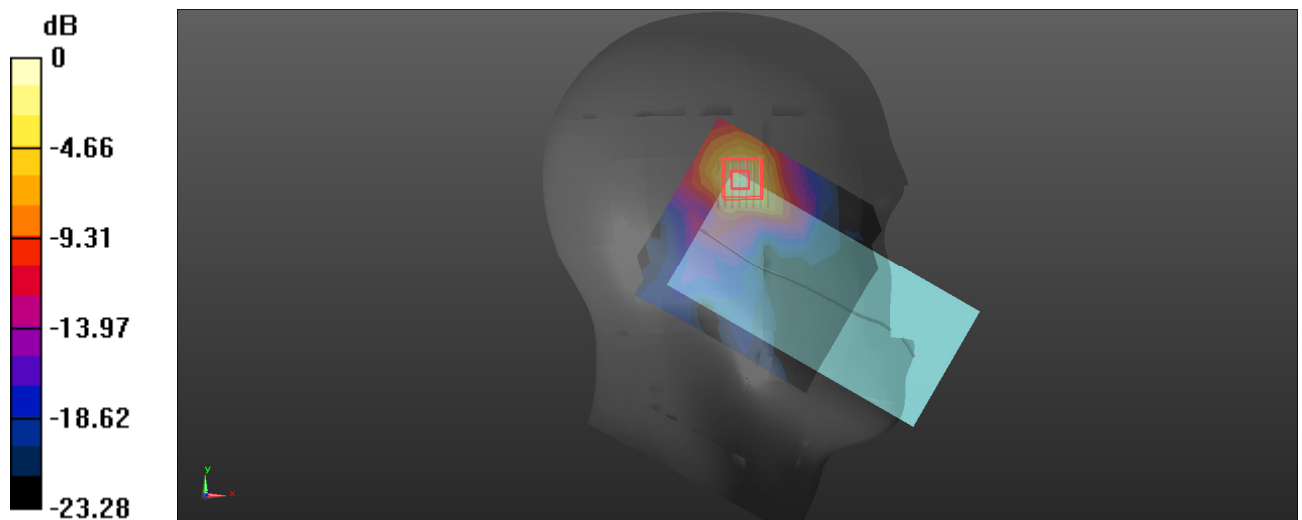

0 dB = 1.96 W/kg = 2.92 dBW/kg



**Plot: 33#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.75 \text{ S/m}$ ;  $\epsilon_r = 34.562$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.3G 802.11ax20 Mid/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.14 W/kg

**Head Right Cheek/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 4.086 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.37 W/kg

**SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.268 W/kg**

Maximum value of SAR (measured) = 1.60 W/kg

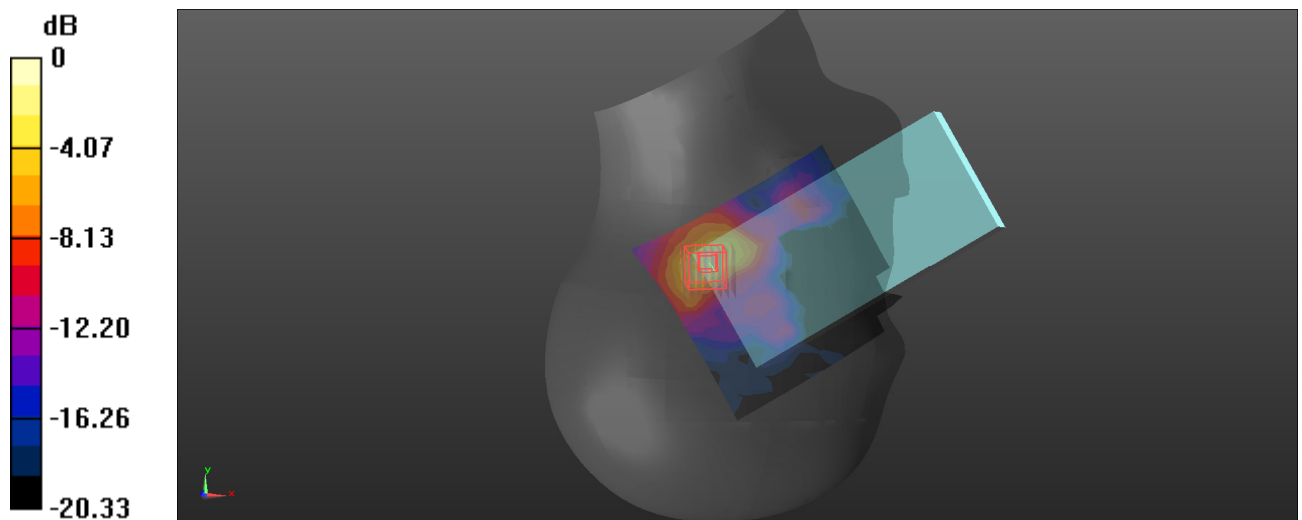

0 dB = 1.60 W/kg = 2.04 dBW/kg

**Plot: 34#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.75 \text{ S/m}$ ;  $\epsilon_r = 34.562$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 5.3G 802.11ax20 Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.52 W/kg


**Head Right Tilt/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.651 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.17 W/kg

**SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.275 W/kg**

Maximum value of SAR (measured) = 1.43 W/kg

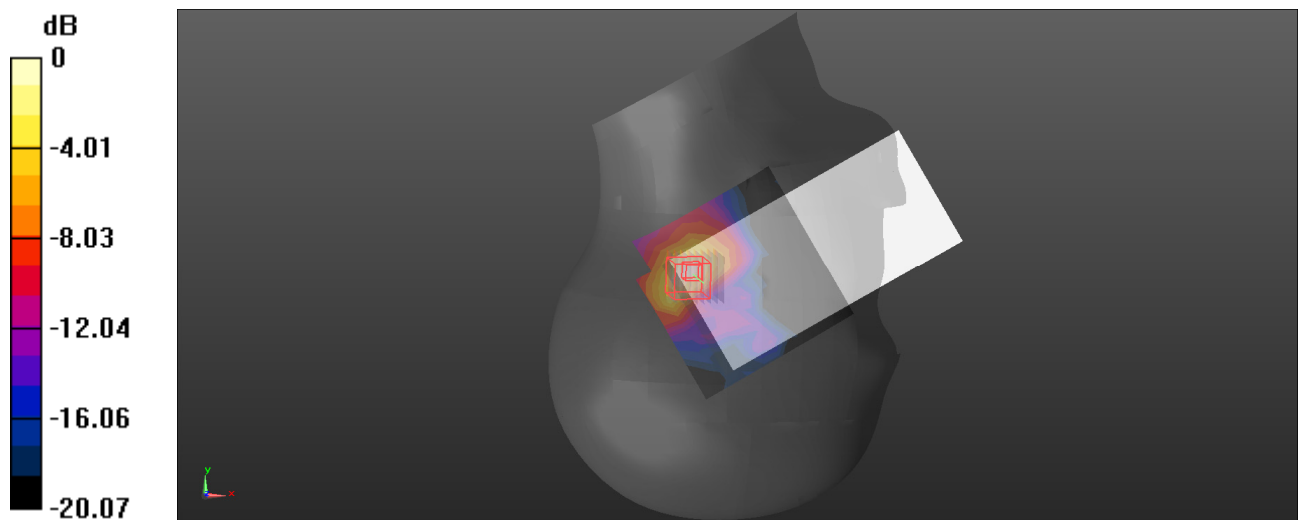

0 dB = 1.43 W/kg = 1.55 dBW/kg

**Plot: 35#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.75 \text{ S/m}$ ;  $\epsilon_r = 34.562$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 5.3G 802.11ax20 Mid/Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.889 W/kg


**Body Front/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.551 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.173 W/kg**

Maximum value of SAR (measured) = 0.855 W/kg

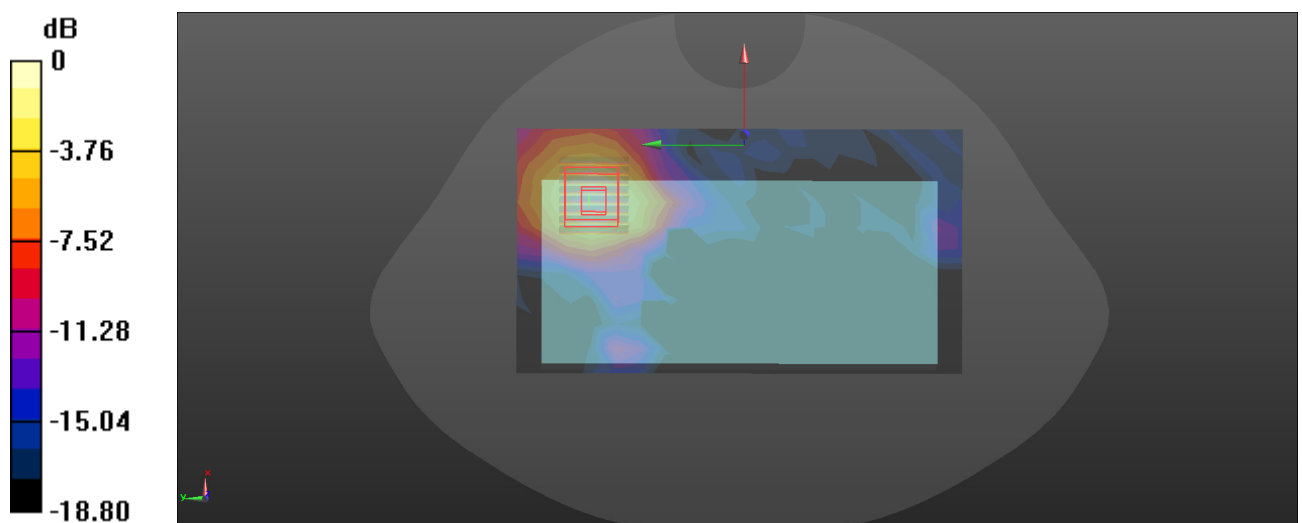

0 dB = 0.855 W/kg = -0.68 dBW/kg

**Plot: 36#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5260 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5260 \text{ MHz}$ ;  $\sigma = 4.727 \text{ S/m}$ ;  $\epsilon_r = 34.581$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5260 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.3G 802.11ax20 Low/Area Scan (12x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.27 W/kg


**Body Back/WLAN 5.3G 802.11ax20 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.558 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.274 W/kg**

Maximum value of SAR (measured) = 1.38 W/kg

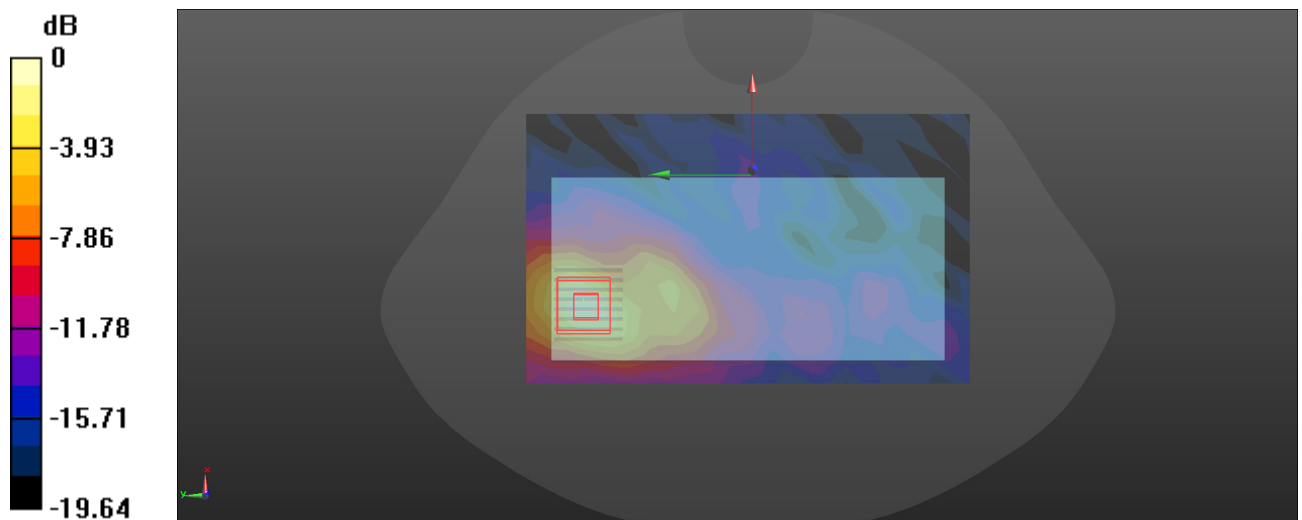

0 dB = 1.38 W/kg = 1.40 dBW/kg

**Plot: 37#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.75 \text{ S/m}$ ;  $\epsilon_r = 34.562$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.3G 802.11ax20 Mid/Area Scan (12x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.26 W/kg


**Body Back/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.271 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.10 W/kg

**SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.274 W/kg**

Maximum value of SAR (measured) = 1.43 W/kg

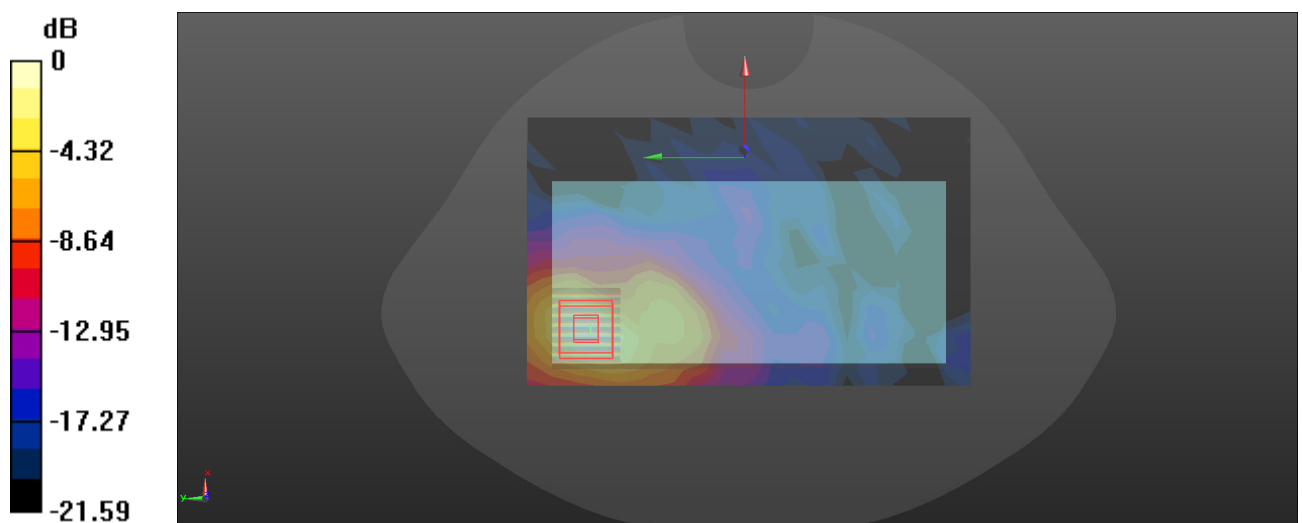

0 dB = 1.43 W/kg = 1.55 dBW/kg

**Plot: 38#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5320 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5320 \text{ MHz}$ ;  $\sigma = 4.797 \text{ S/m}$ ;  $\epsilon_r = 34.524$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5320 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.3G 802.11ax20 High/Area Scan (12x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.52 W/kg


**Body Back/WLAN 5.3G 802.11ax20 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 3.275 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.27 W/kg

**SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.298 W/kg**

Maximum value of SAR (measured) = 1.52 W/kg

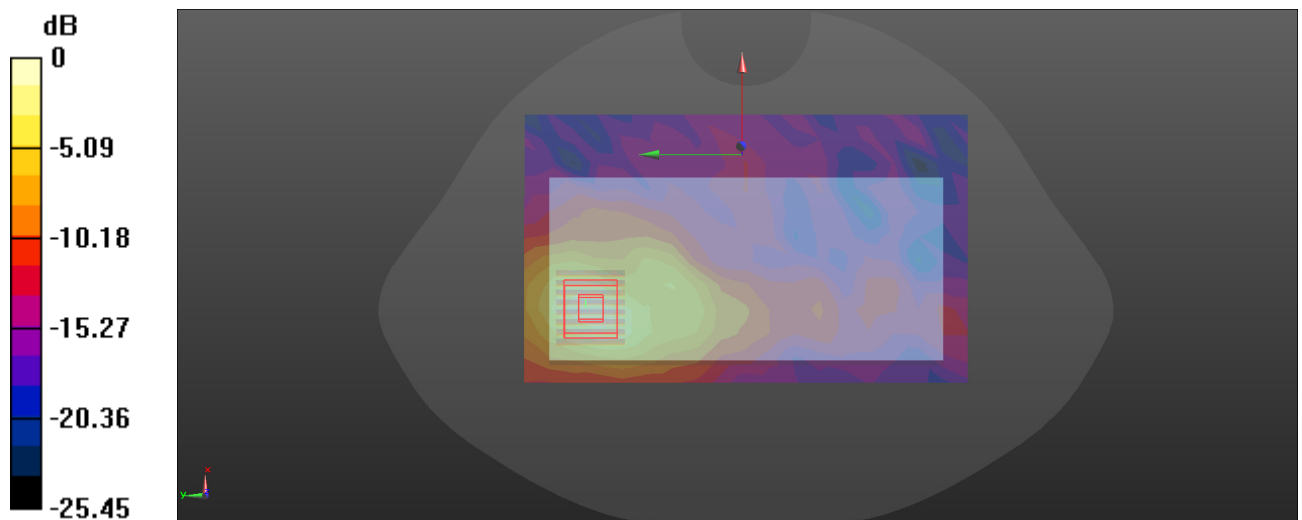

0 dB = 1.52 W/kg = 1.82 dBW/kg

**Plot: 39#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.75 \text{ S/m}$ ;  $\epsilon_r = 34.562$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Right/WLAN 5.3G 802.11ax20 Mid/Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.606 W/kg


**Body Right/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.195 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.888 W/kg

**SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.140 W/kg**

Maximum value of SAR (measured) = 0.584 W/kg

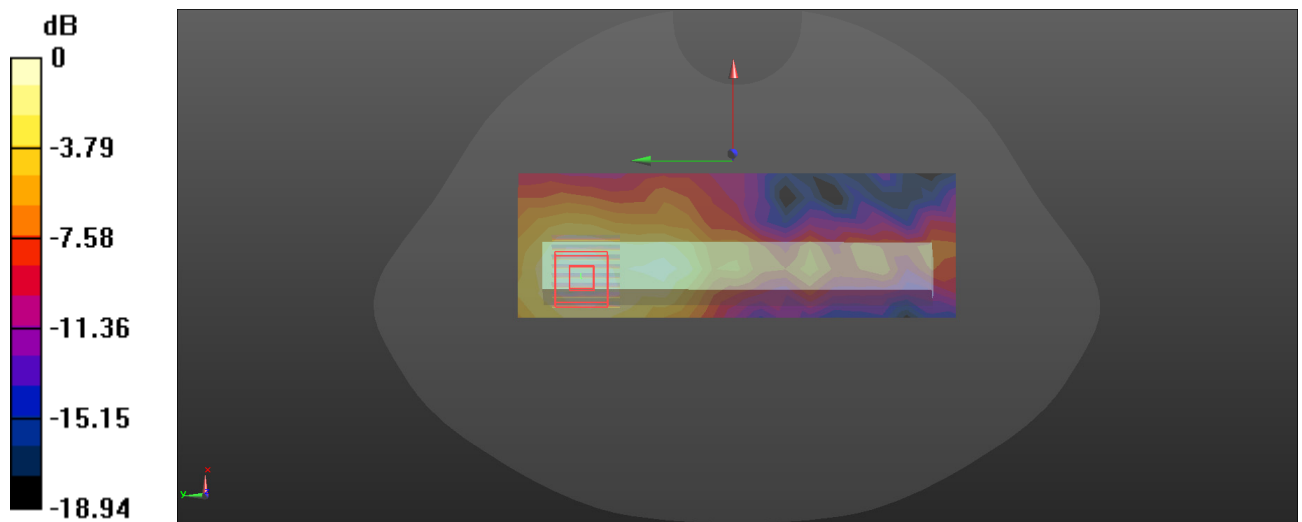

0 dB = 0.584 W/kg = -2.34 dBW/kg

**Plot: 40#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz;Duty Cycle: 1:1.157

Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 4.75 \text{ S/m}$ ;  $\epsilon_r = 34.562$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5280 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Top/WLAN 5.3G 802.11ax20 Mid/Area Scan (7x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.06 W/kg


**Body Top/WLAN 5.3G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.511 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.204 W/kg**

Maximum value of SAR (measured) = 0.983 W/kg

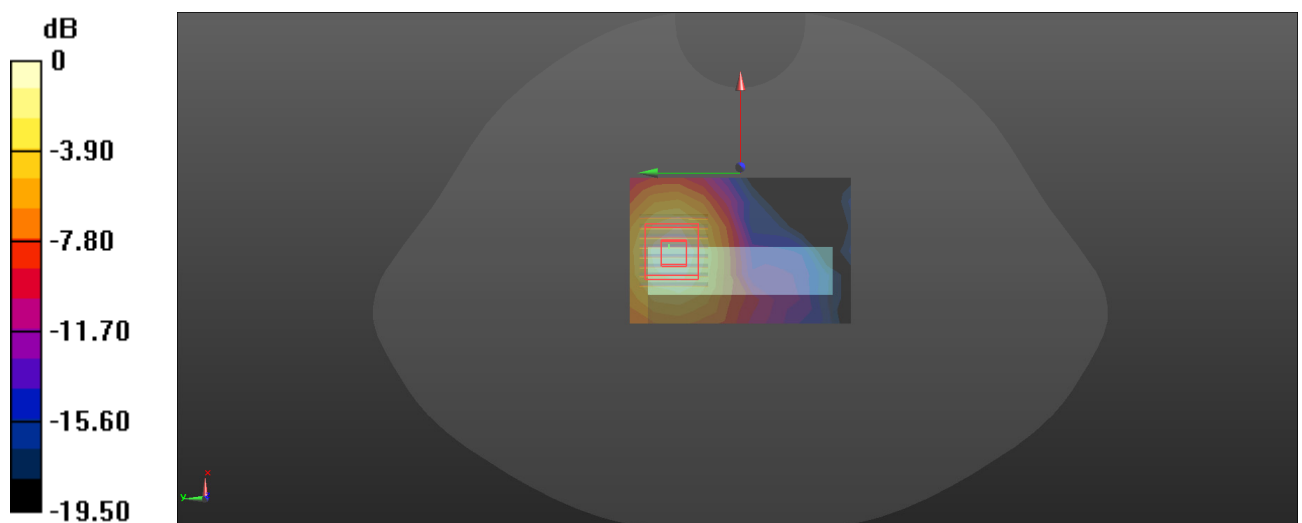

0 dB = 0.983 W/kg = -0.07 dBW/kg



**Plot: 41#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5500 \text{ MHz}$ ;  $\sigma = 4.896 \text{ S/m}$ ;  $\epsilon_r = 34.84$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.6G 802.11a Low/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.05 W/kg


**Head Left Cheek/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 7.266 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.69 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.467 W/kg**

Maximum value of SAR (measured) = 2.37 W/kg

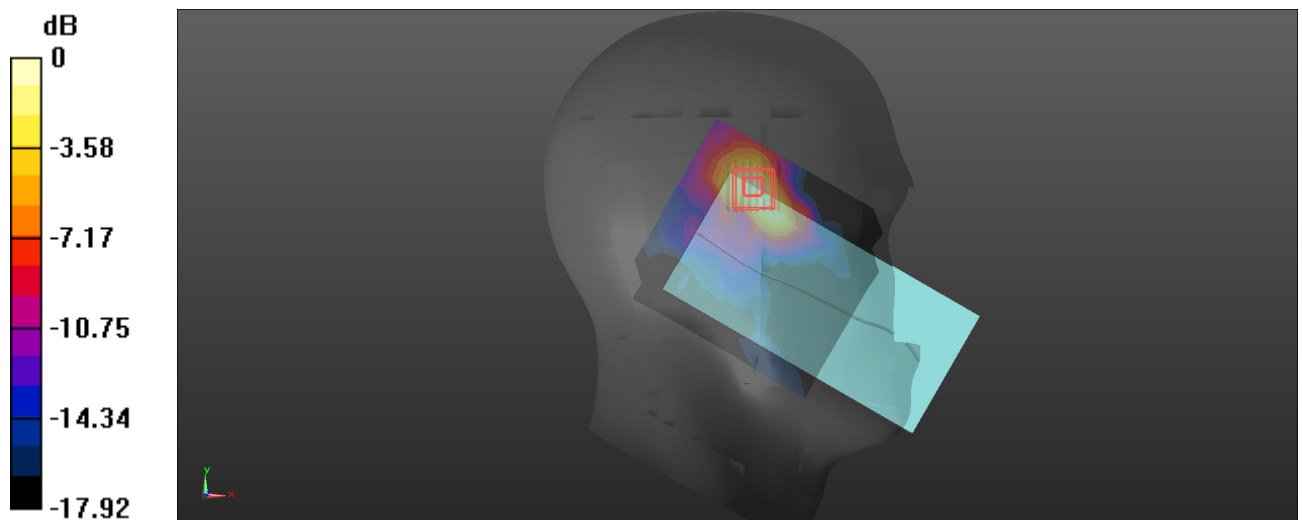

0 dB = 2.37 W/kg = 3.75 dBW/kg

**Plot: 42#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 4.946 \text{ S/m}$ ;  $\epsilon_r = 34.736$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.6G 802.11a Mid/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.50 W/kg


**Head Left Cheek/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 7.224 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 4.63 W/kg

**SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.509 W/kg**

Maximum value of SAR (measured) = 3.08 W/kg

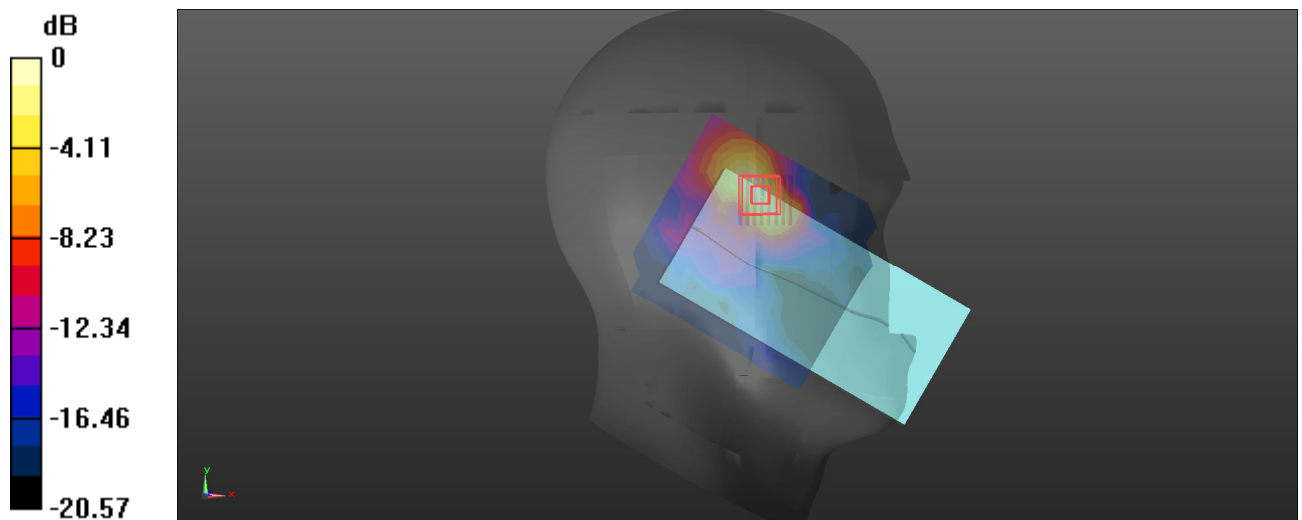

0 dB = 3.08 W/kg = 4.89 dBW/kg

**Plot: 43#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5720 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5720 \text{ MHz}$ ;  $\sigma = 5.067 \text{ S/m}$ ;  $\epsilon_r = 35.438$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5720 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/ WLAN 5.6G 802.11a High/Area Scan (11x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.11 W/kg


**Head Left Cheek/ WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 5.616 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.91 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.423 W/kg**

Maximum value of SAR (measured) = 2.48 W/kg

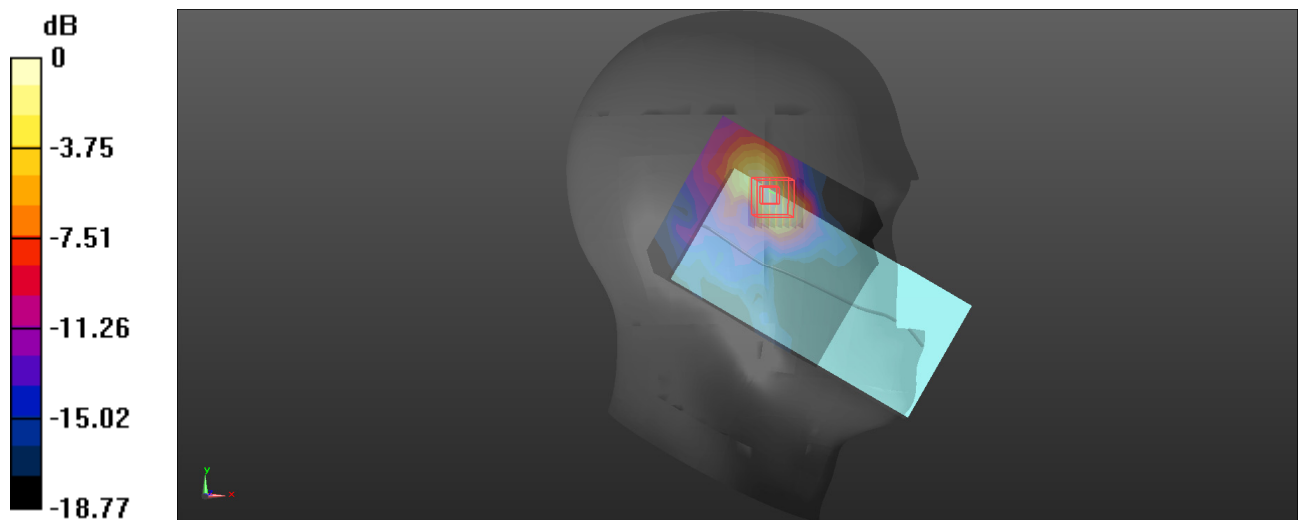

0 dB = 2.48 W/kg = 3.94 dBW/kg

**Plot: 44#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5500 \text{ MHz}$ ;  $\sigma = 4.896 \text{ S/m}$ ;  $\epsilon_r = 34.84$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.6G 802.11a Low/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.10 W/kg


**Head Left Tilt/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 6.006 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.59 W/kg

**SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.424 W/kg**

Maximum value of SAR (measured) = 2.41 W/kg

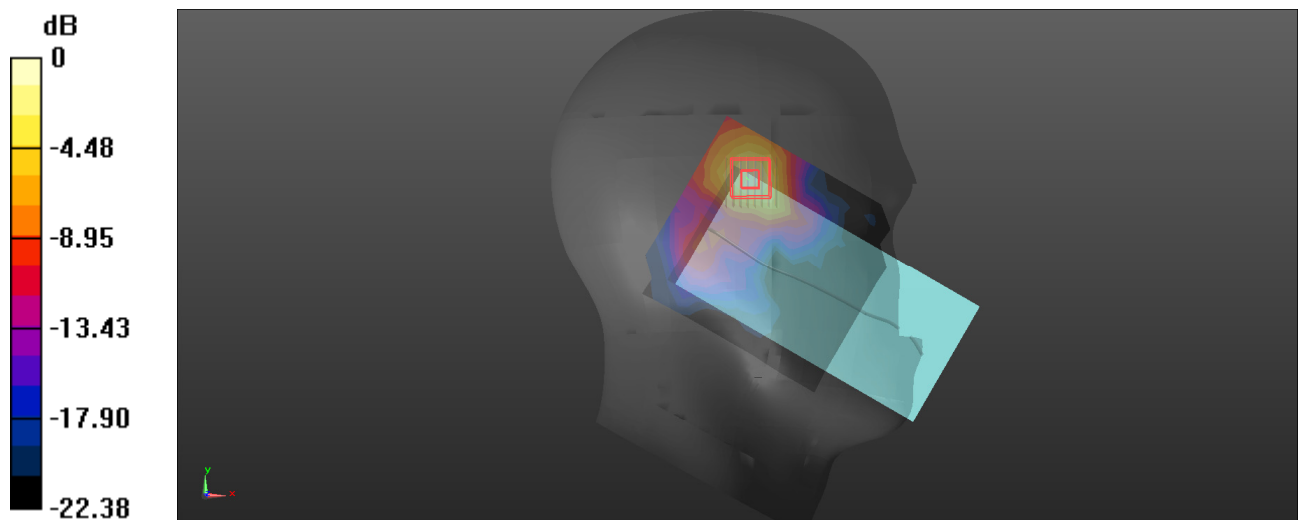

0 dB = 2.41 W/kg = 3.82 dBW/kg

**Plot: 45#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 4.946 \text{ S/m}$ ;  $\epsilon_r = 34.736$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.6G 802.11a Mid/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.66 W/kg


**Head Left Tilt/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 4.984 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.72 W/kg

**SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.317 W/kg**

Maximum value of SAR (measured) = 1.81 W/kg

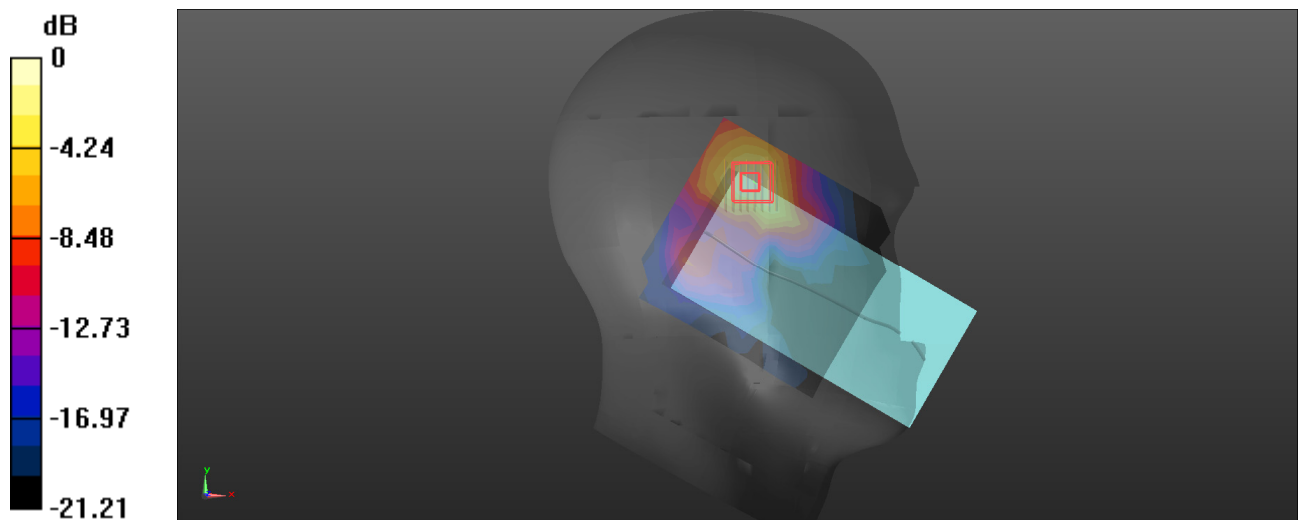

0 dB = 1.81 W/kg = 2.58 dBW/kg

**Plot: 46#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5720 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5720 \text{ MHz}$ ;  $\sigma = 5.067 \text{ S/m}$ ;  $\epsilon_r = 35.438$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5720 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/ WLAN 5.6G 802.11a High/Area Scan (11x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.29 W/kg


**Head Left Tilt/ WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 3.348 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.01 W/kg

**SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.223 W/kg**

Maximum value of SAR (measured) = 1.29 W/kg

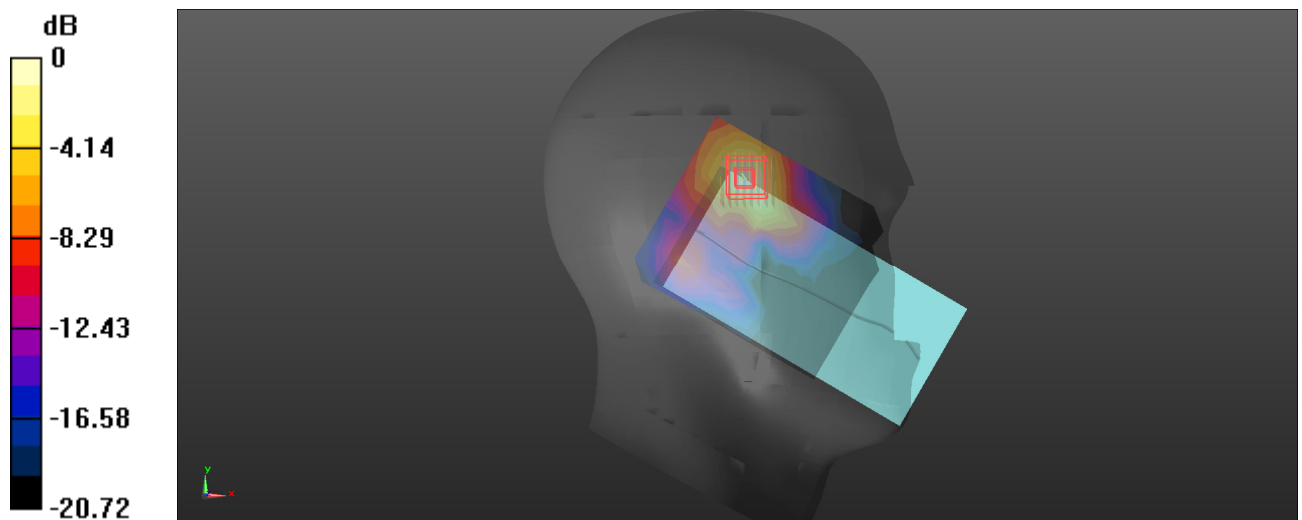

0 dB = 1.29 W/kg = 1.11 dBW/kg

**Plot: 47#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5500 \text{ MHz}$ ;  $\sigma = 4.896 \text{ S/m}$ ;  $\epsilon_r = 34.84$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.6G 802.11a Low/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.17 W/kg


**Head Right Cheek/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 5.777 V/m; Power Drift =0.07 dB

Peak SAR (extrapolated) = 2.93 W/kg

**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.451 W/kg**

Maximum value of SAR (measured) = 2.05 W/kg

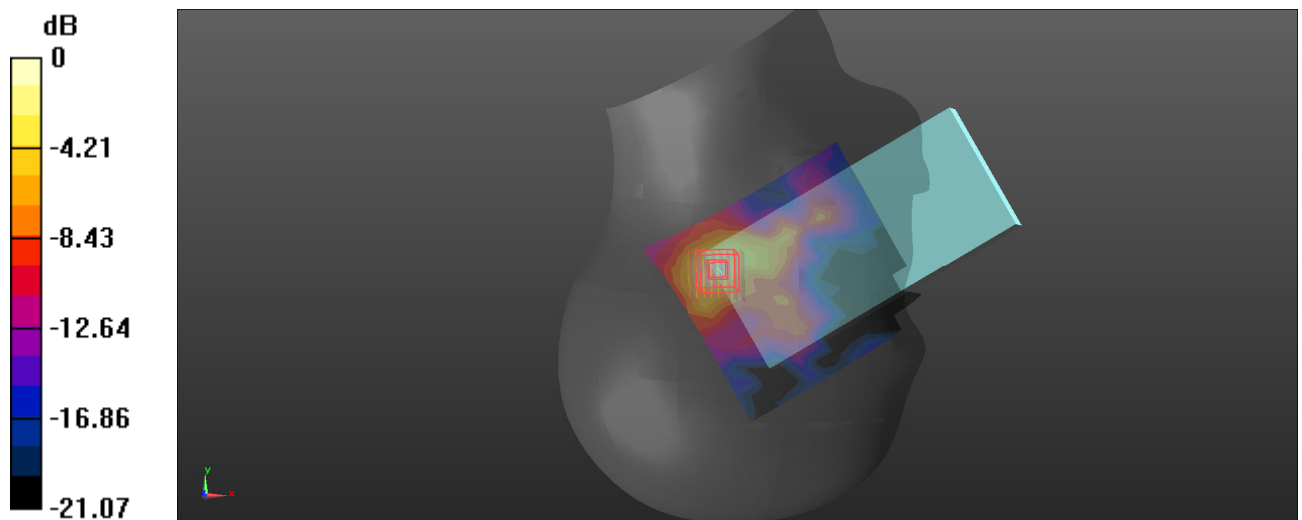

0 dB = 2.05 W/kg = 3.12 dBW/kg

**Plot: 48#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 4.946 \text{ S/m}$ ;  $\epsilon_r = 34.736$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.6G 802.11a Mid/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.94 W/kg


**Head Right Cheek/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 4.803 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.70 W/kg

**SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.402 W/kg**

Maximum value of SAR (measured) = 1.82 W/kg

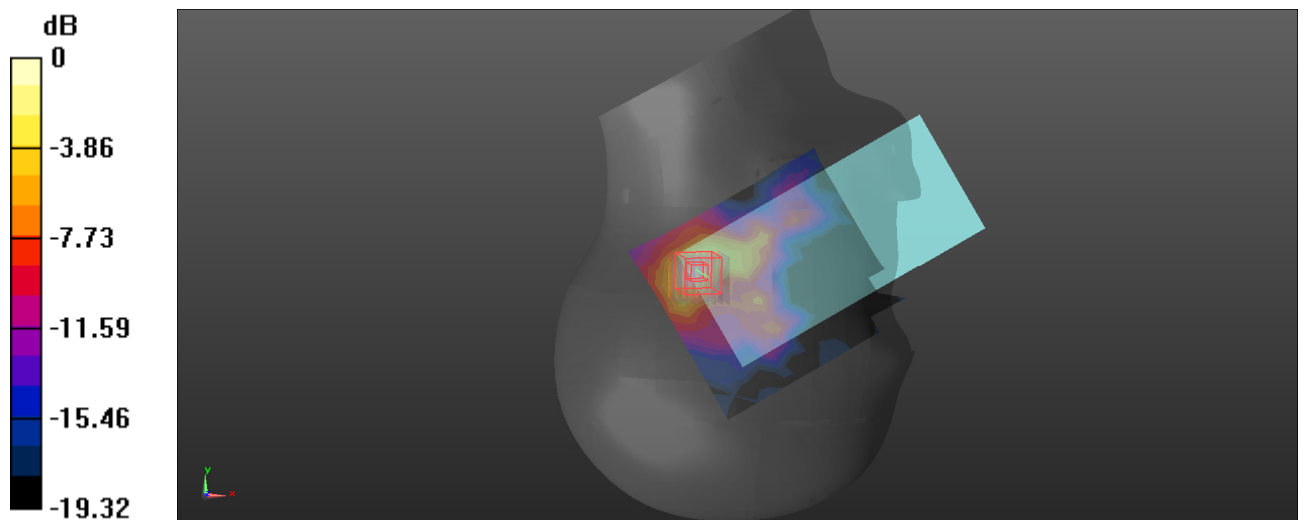

0 dB = 1.82 W/kg = 2.60 dBW/kg



**Plot: 49#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5720 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5720 \text{ MHz}$ ;  $\sigma = 5.067 \text{ S/m}$ ;  $\epsilon_r = 35.438$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5720 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/ WLAN 5.6G 802.11a High/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.45 W/kg


**Head Right Cheek/ WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 5.178 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.97 W/kg

**SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.291 W/kg**

Maximum value of SAR (measured) = 1.33 W/kg

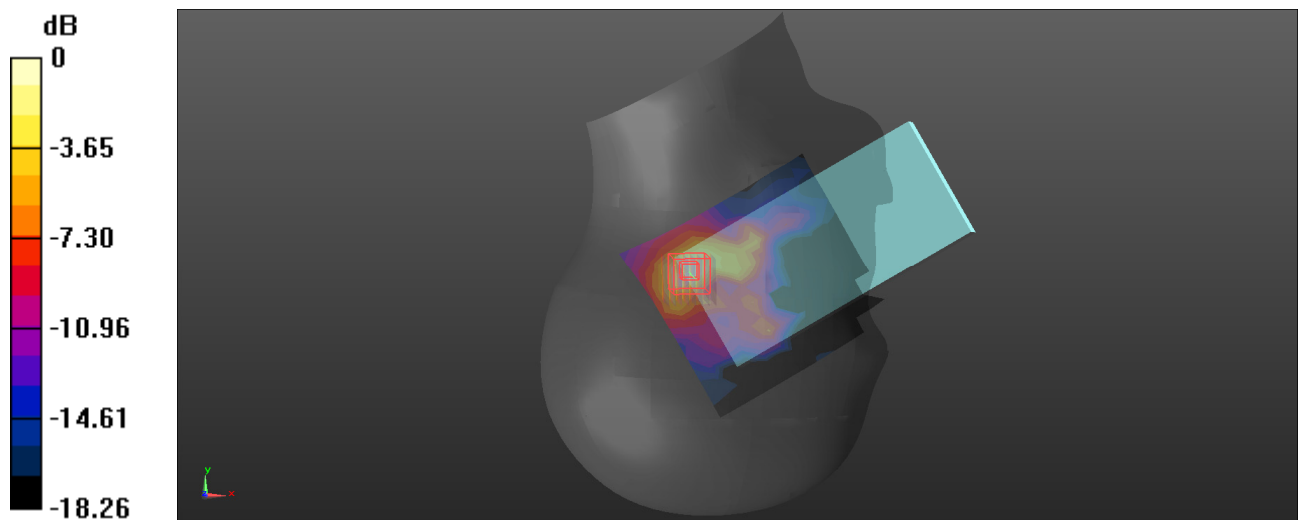

0 dB = 1.33 W/kg = 1.24 dBW/kg

**Plot: 50#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 4.946 \text{ S/m}$ ;  $\epsilon_r = 34.736$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 5.6G 802.11a Mid/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.37 W/kg


**Head Right Tilt/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 4.580 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.92 W/kg

**SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.256 W/kg**

Maximum value of SAR (measured) = 1.39 W/kg

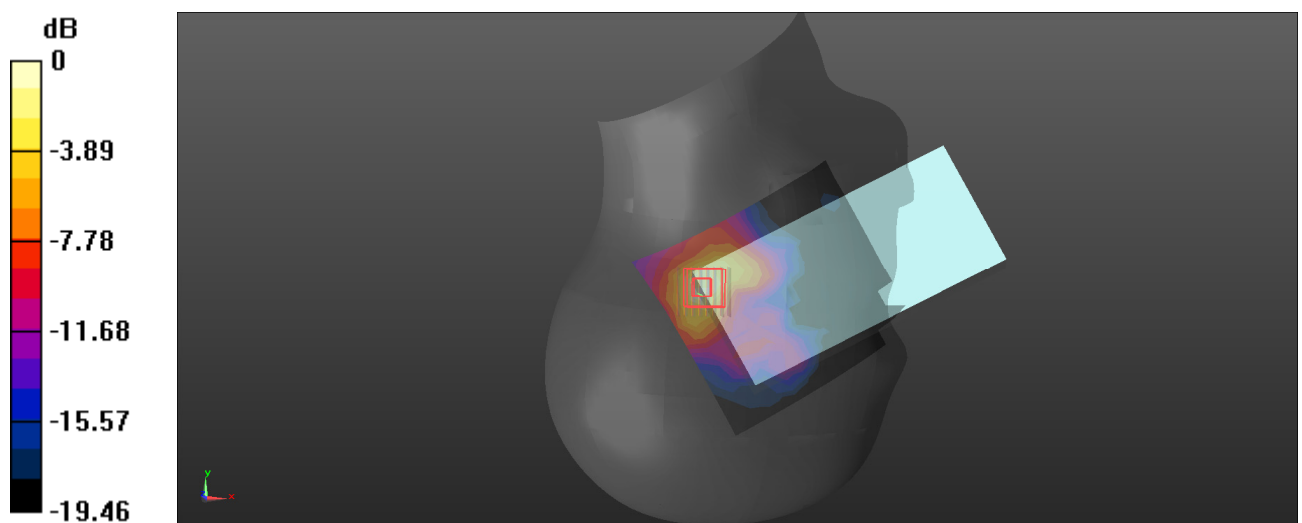

0 dB = 1.39 W/kg = 1.43 dBW/kg

**Plot: 51#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 4.946 \text{ S/m}$ ;  $\epsilon_r = 34.736$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 5.6G 802.11a Mid/Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.900 W/kg


**Body Front/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.256 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.185 W/kg**

Maximum value of SAR (measured) = 0.942 W/kg

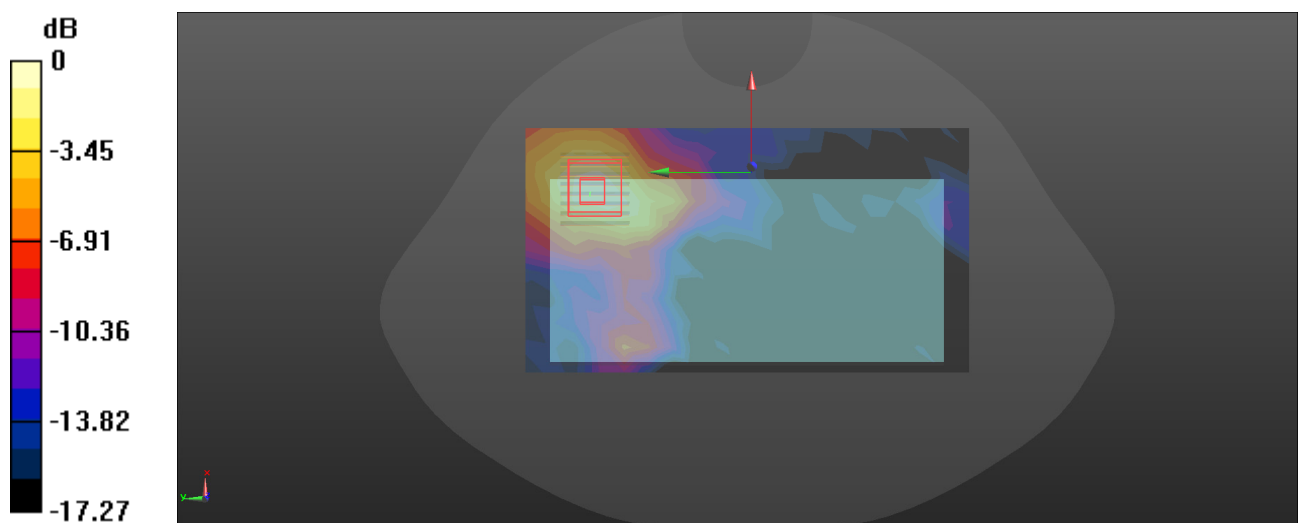

0 dB = 0.942 W/kg = -0.26 dBW/kg

**Plot: 52#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5500 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5500 \text{ MHz}$ ;  $\sigma = 4.896 \text{ S/m}$ ;  $\epsilon_r = 34.84$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.6G 802.11a Low/Area Scan (12x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.19 W/kg


**Body Back/WLAN 5.6G 802.11a Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.492 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.26 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.440 W/kg**

Maximum value of SAR (measured) = 2.17 W/kg

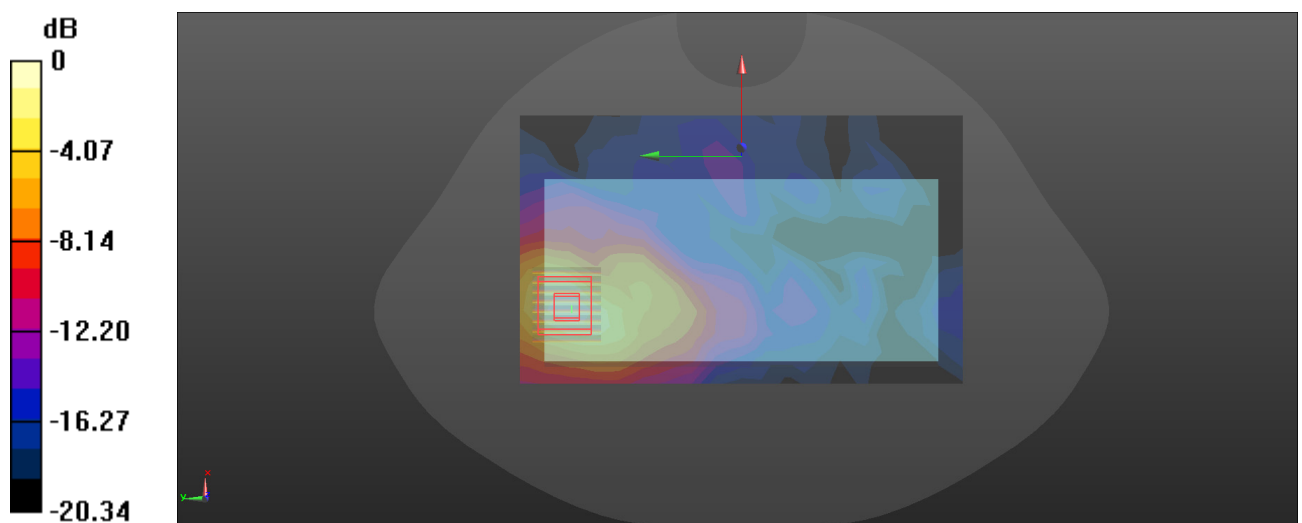

0 dB = 2.17 W/kg = 3.36 dBW/kg

**Plot: 53#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 4.946 \text{ S/m}$ ;  $\epsilon_r = 34.736$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.6G 802.11a Mid/Area Scan (12x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.71 W/kg


**Body Back/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 2.073 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.52 W/kg

**SAR(1 g) = 0.809 W/kg; SAR(10 g) = 0.330 W/kg**

Maximum value of SAR (measured) = 1.66 W/kg

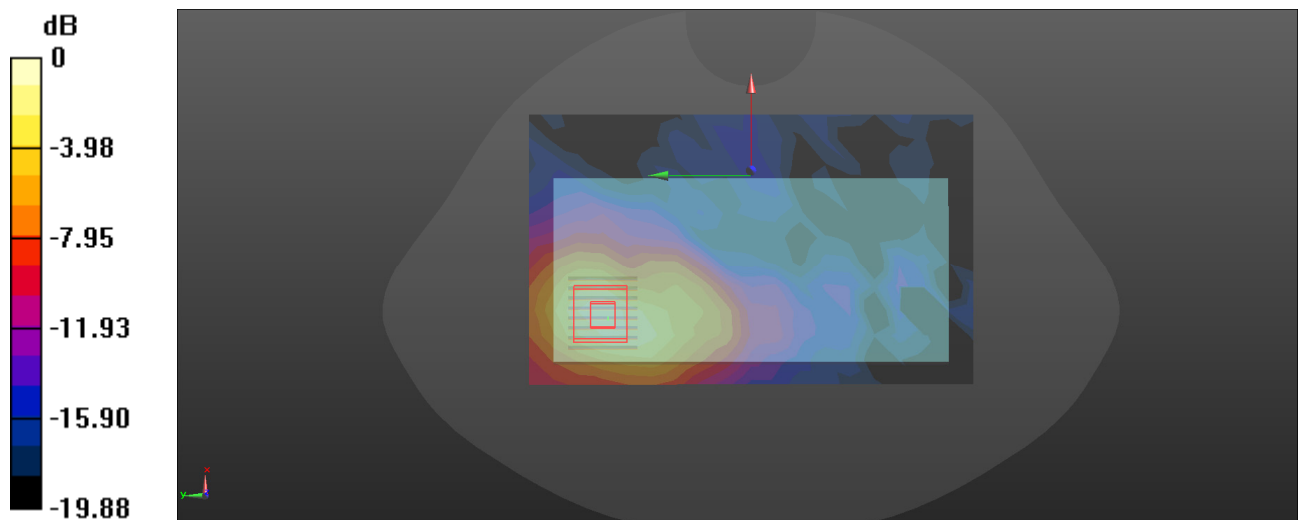

0 dB = 1.66 W/kg = 2.20 dBW/kg

**Plot: 54#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5720 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5720 \text{ MHz}$ ;  $\sigma = 5.067 \text{ S/m}$ ;  $\epsilon_r = 35.438$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5720 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/ WLAN 5.6G 802.11a High/Area Scan (12x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.24 W/kg


**Body Back/ WLAN 5.6G 802.11a High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.527 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.242 W/kg**

Maximum value of SAR (measured) = 1.31 W/kg

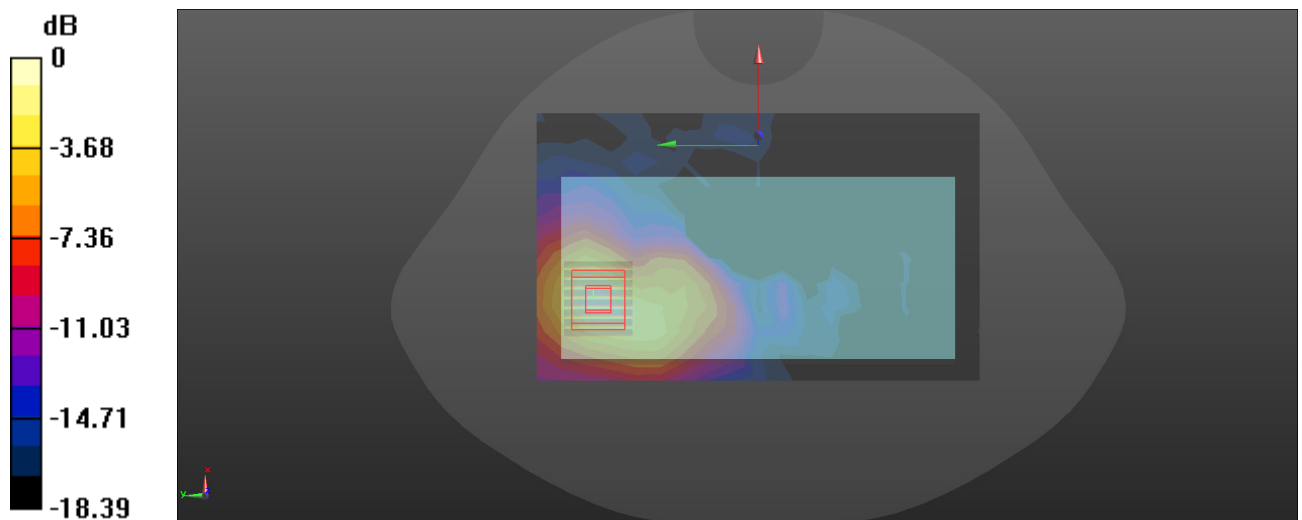

0 dB = 1.31 W/kg = 1.17 dBW/kg

**Plot: 55#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 4.946 \text{ S/m}$ ;  $\epsilon_r = 34.736$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Right/WLAN 5.6G 802.11a Mid/Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.999 W/kg


**Body Right/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.180 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.225 W/kg**

Maximum value of SAR (measured) = 1.00 W/kg

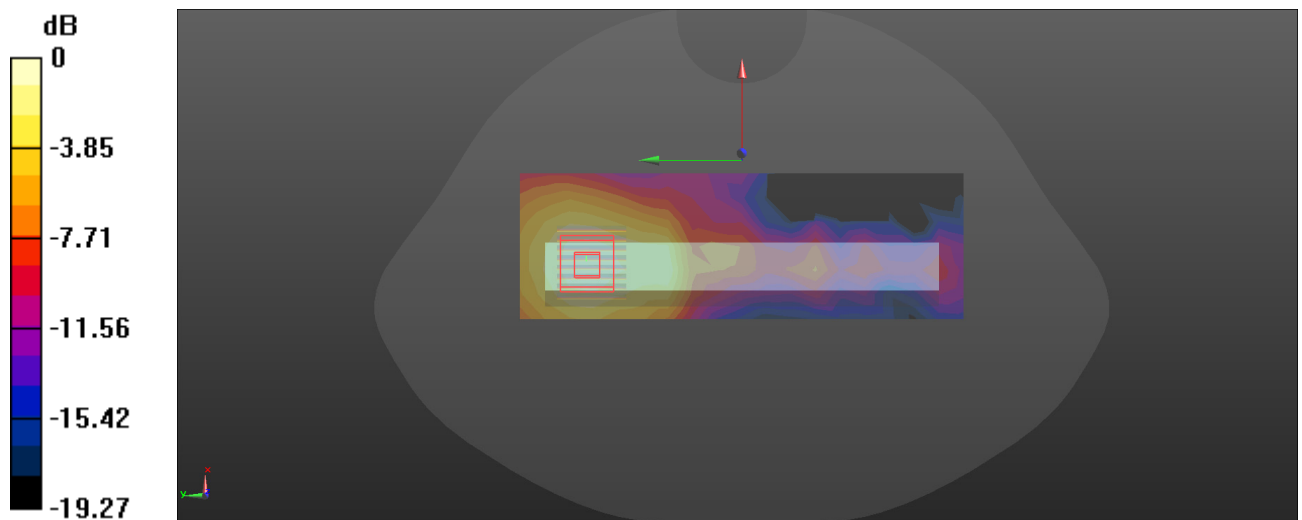

0 dB = 1.00 W/kg = 0.00 dBW/kg

**Plot: 56#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz;Duty Cycle: 1:1.022

Medium parameters used:  $f = 5580 \text{ MHz}$ ;  $\sigma = 4.946 \text{ S/m}$ ;  $\epsilon_r = 34.736$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.1, 5.1, 5.1) @ 5580 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Top/WLAN 5.6G 802.11a Mid/Area Scan (7x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.16 W/kg


**Body Top/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.764 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 1.92 W/kg

**SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.279 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

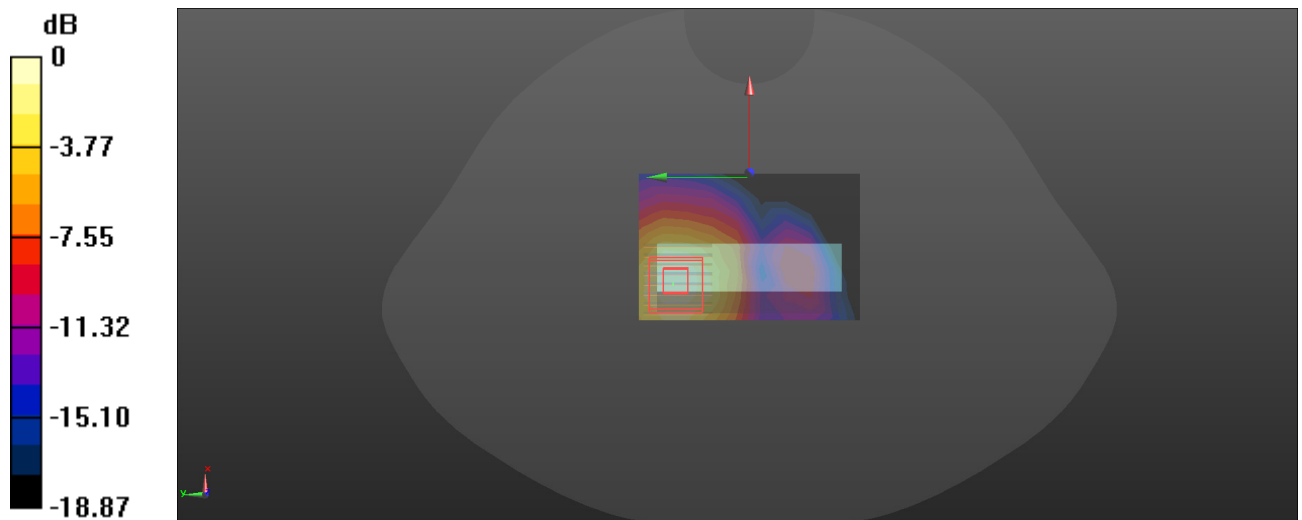

0 dB = 1.28 W/kg = 1.07 dBW/kg



**Plot: 57#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.135 \text{ S/m}$ ;  $\epsilon_r = 35.383$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.8G 802.11ax40 Low/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.72 W/kg

**Head Left Cheek/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 5.183 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.81 W/kg

**SAR(1 g) = 1.37 W/kg; SAR(10 g) = 0.499 W/kg**

Maximum value of SAR (measured) = 3.13 W/kg

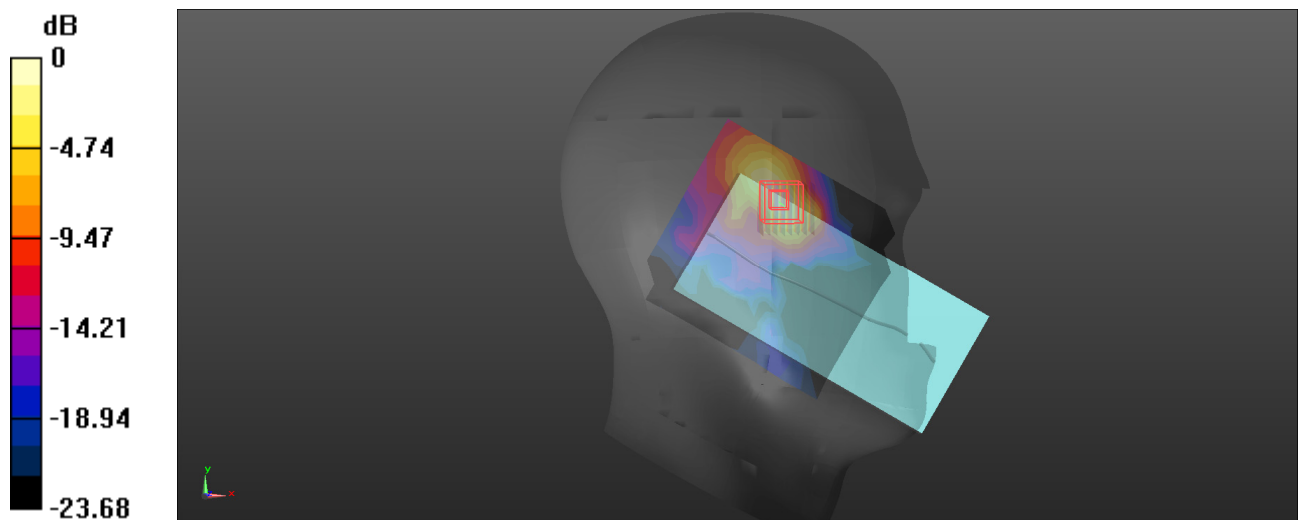

0 dB = 3.13 W/kg = 4.96 dBW/kg

**Plot: 58#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5795 \text{ MHz}$ ;  $\sigma = 5.212 \text{ S/m}$ ;  $\epsilon_r = 35.32$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.8G 802.11ax40 High/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.54 W/kg

**Head Left Cheek/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 5.233 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 4.51 W/kg

**SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.470 W/kg**

Maximum value of SAR (measured) = 2.94 W/kg

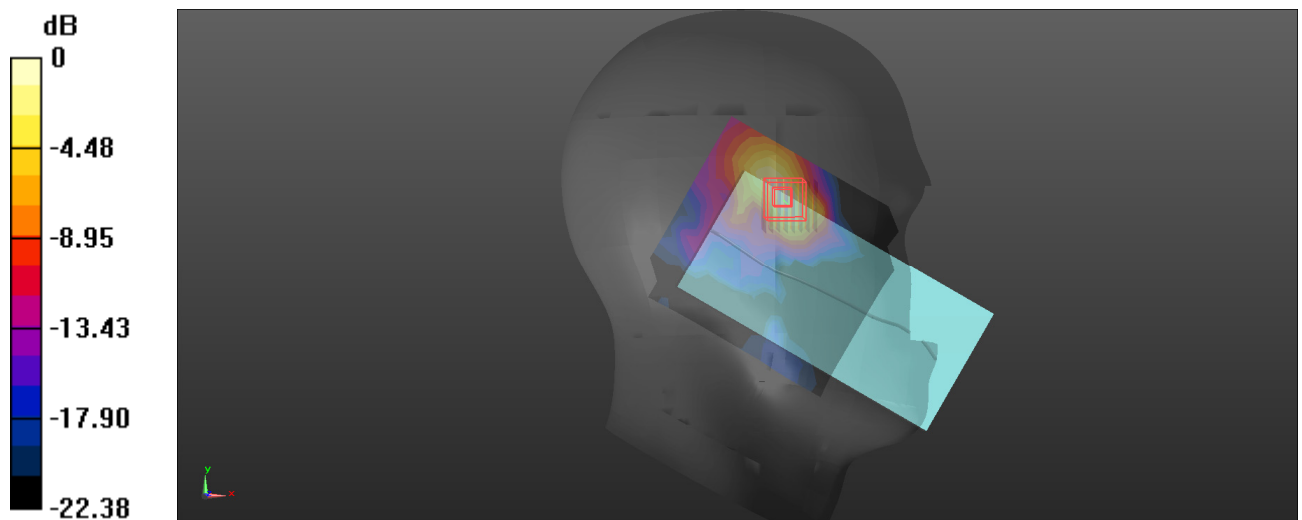

0 dB = 2.94 W/kg = 4.68 dBW/kg

**Plot: 59#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.135 \text{ S/m}$ ;  $\epsilon_r = 35.383$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.8G 802.11ax40 Low/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.46 W/kg


**Head Left Tilt/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.554 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.27 W/kg

**SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.272 W/kg**

Maximum value of SAR (measured) = 1.53 W/kg

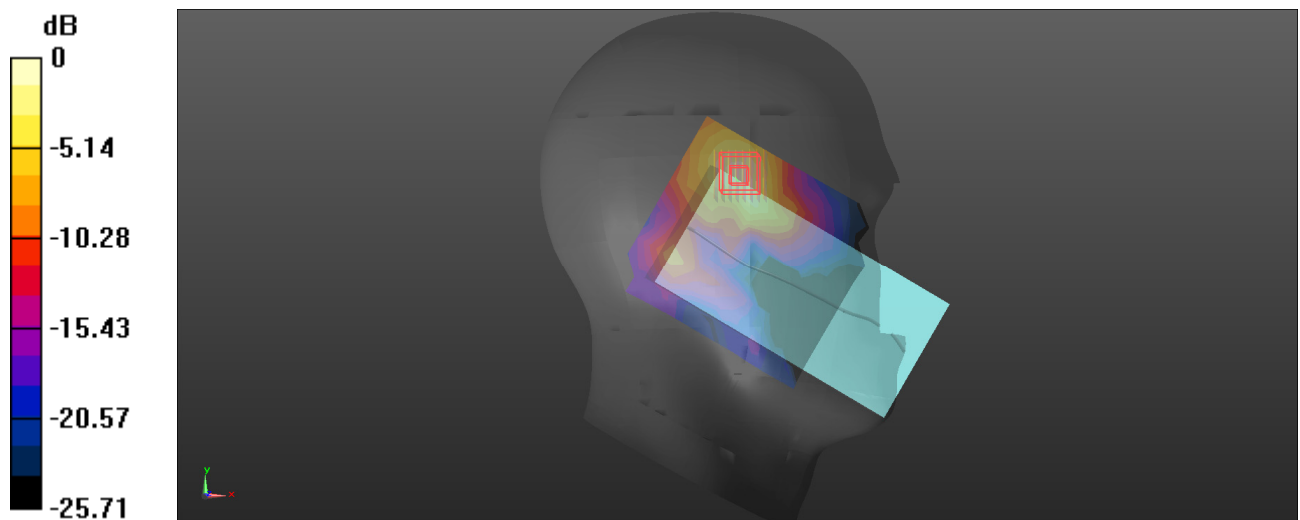

0 dB = 1.53 W/kg = 1.85 dBW/kg

**Plot: 60#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.135 \text{ S/m}$ ;  $\epsilon_r = 35.383$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.8G 802.11ax40 Low/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.13 W/kg

**Head Right Cheek/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 6.014 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.95 W/kg

**SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.221 W/kg**

Maximum value of SAR (measured) = 1.31 W/kg

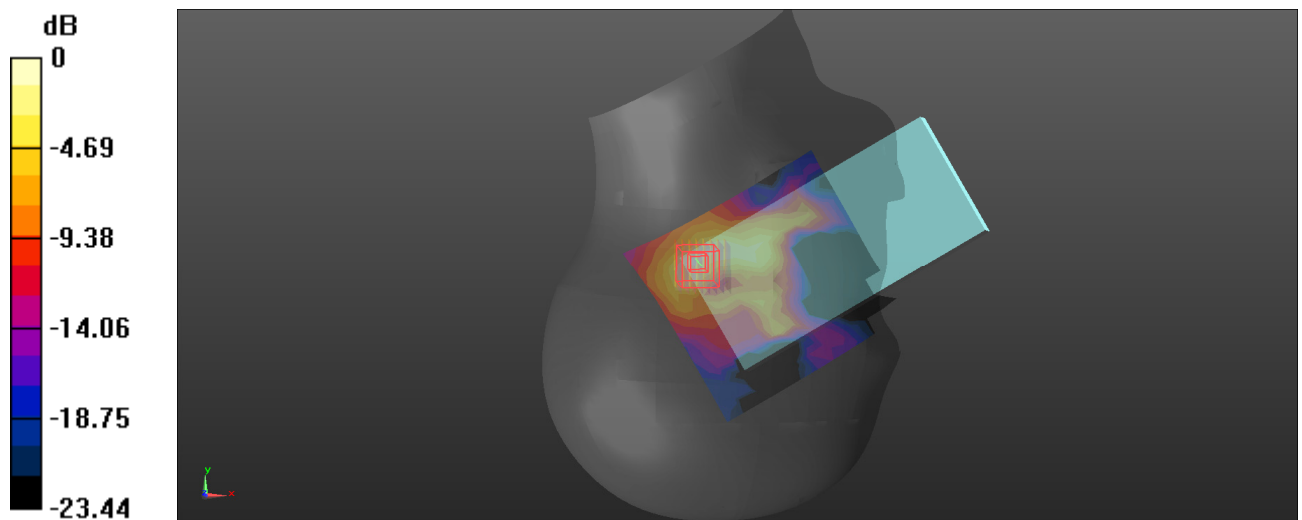

0 dB = 1.31 W/kg = 1.17 dBW/kg

**Plot: 61#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.135 \text{ S/m}$ ;  $\epsilon_r = 35.383$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 5.8G 802.11ax40 Low/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.04 W/kg


**Head Right Tilt/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 3.911 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.194 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

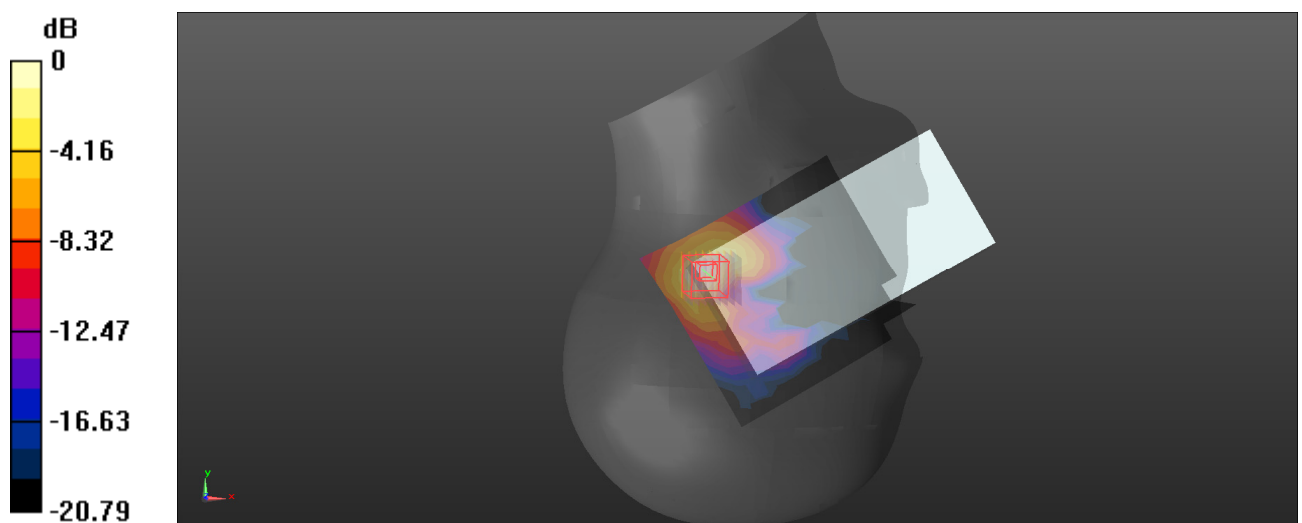

0 dB = 1.05 W/kg = 0.21 dBW/kg

**Plot: 62#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.135 \text{ S/m}$ ;  $\epsilon_r = 35.383$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 5.8G 802.11ax40 Low/Area Scan (11x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.697 W/kg


**Body Front/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 1.011 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.975 W/kg

**SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.132 W/kg**

Maximum value of SAR (measured) = 0.692 W/kg

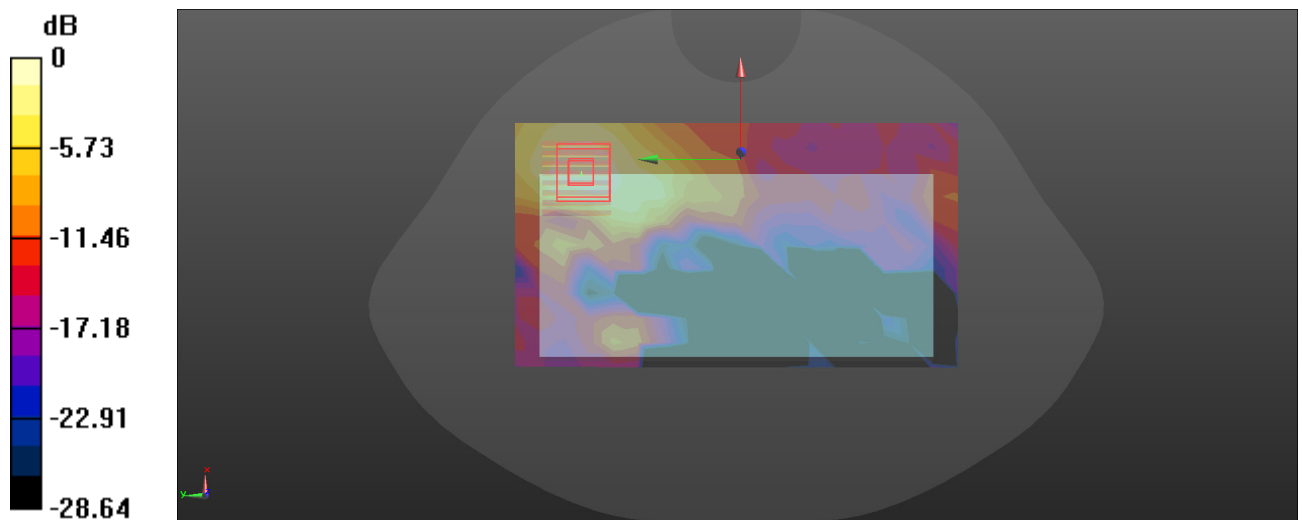

0 dB = 0.692 W/kg = -1.60 dBW/kg

**Plot: 63#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.135 \text{ S/m}$ ;  $\epsilon_r = 35.383$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.8G 802.11ax40 Low/Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.37 W/kg


**Body Back/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9200 V/m; Power Drift =0.12 dB

Peak SAR (extrapolated) = 2.27 W/kg

**SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.276 W/kg**

Maximum value of SAR (measured) = 1.49 W/kg

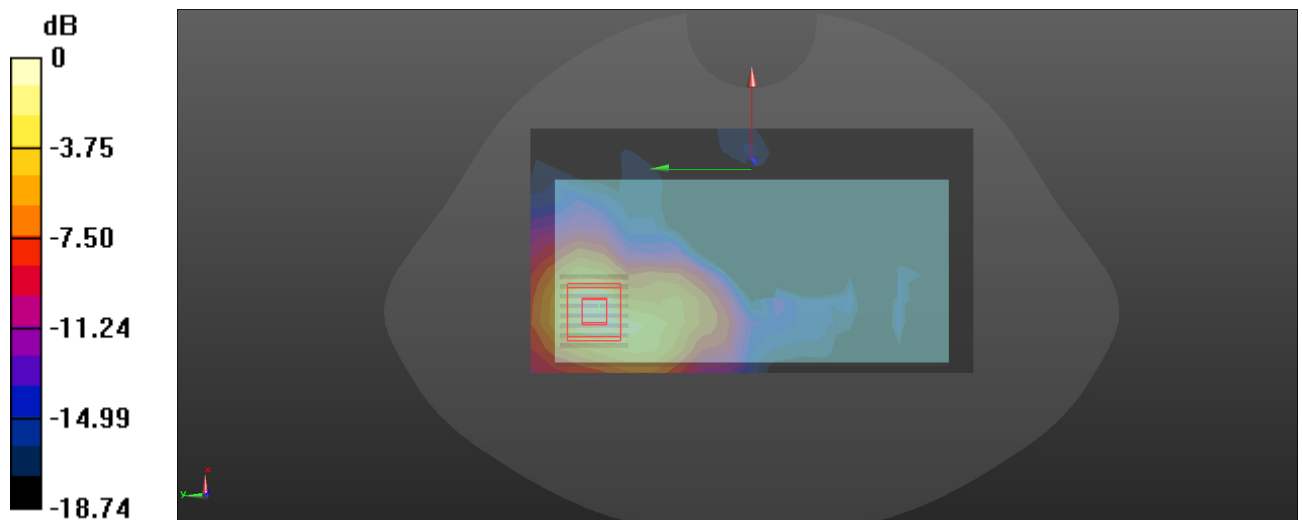

0 dB = 1.49 W/kg = 1.73 dBW/kg

**Plot: 64#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5795 \text{ MHz}$ ;  $\sigma = 5.212 \text{ S/m}$ ;  $\epsilon_r = 35.32$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.8G 802.11ax40 High/Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.16 W/kg


**Body Back/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.231 W/kg**

Maximum value of SAR (measured) = 1.32 W/kg

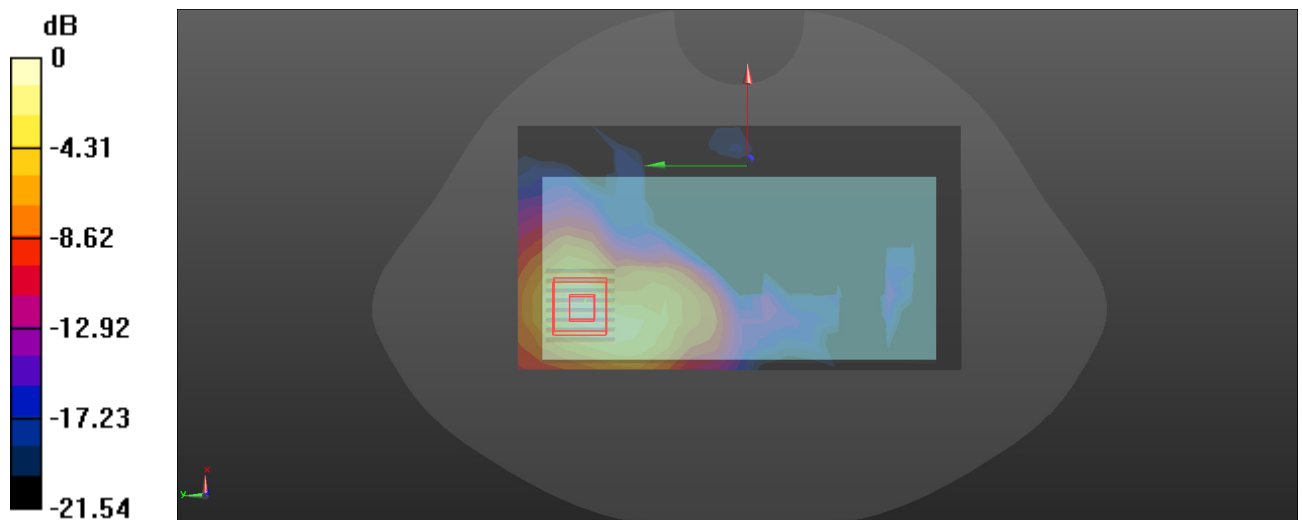

0 dB = 1.32 W/kg = 1.21 dBW/kg



**Plot: 65#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.135 \text{ S/m}$ ;  $\epsilon_r = 35.383$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Right/WLAN 5.8G 802.11ax40 Low/Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.21 W/kg


**Body Right/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.592 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 0.610 W/kg; SAR(10 g) = 0.255 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

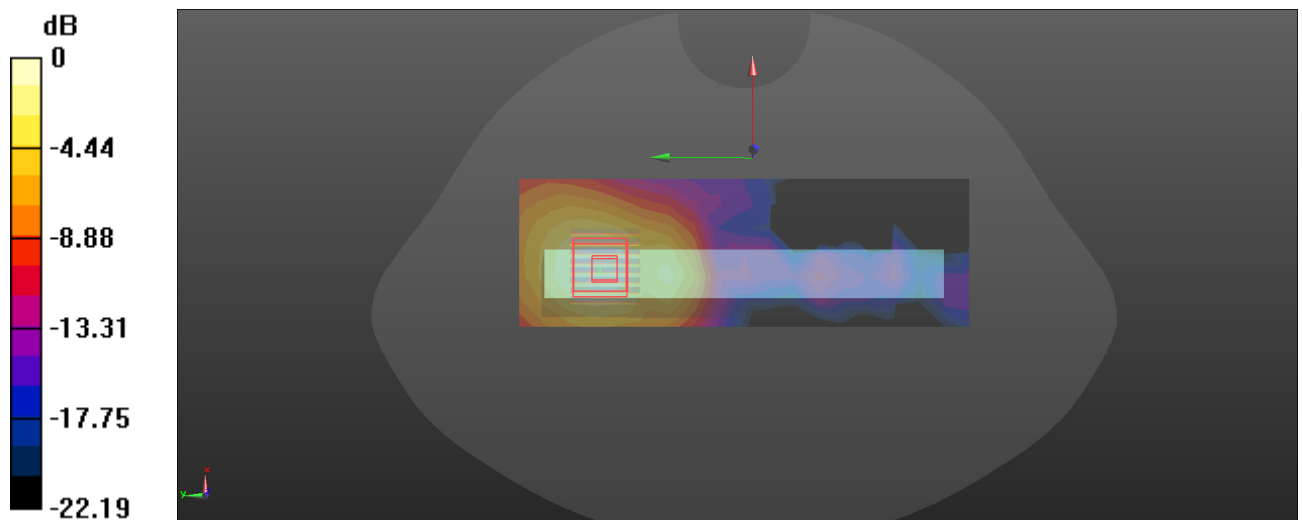

0 dB = 1.22 W/kg = 0.86 dBW/kg

**Plot: 66#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.06

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.135 \text{ S/m}$ ;  $\epsilon_r = 35.383$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Top/WLAN 5.8G 802.11ax40 Low/Area Scan (7x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg


**Body Top/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.754 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

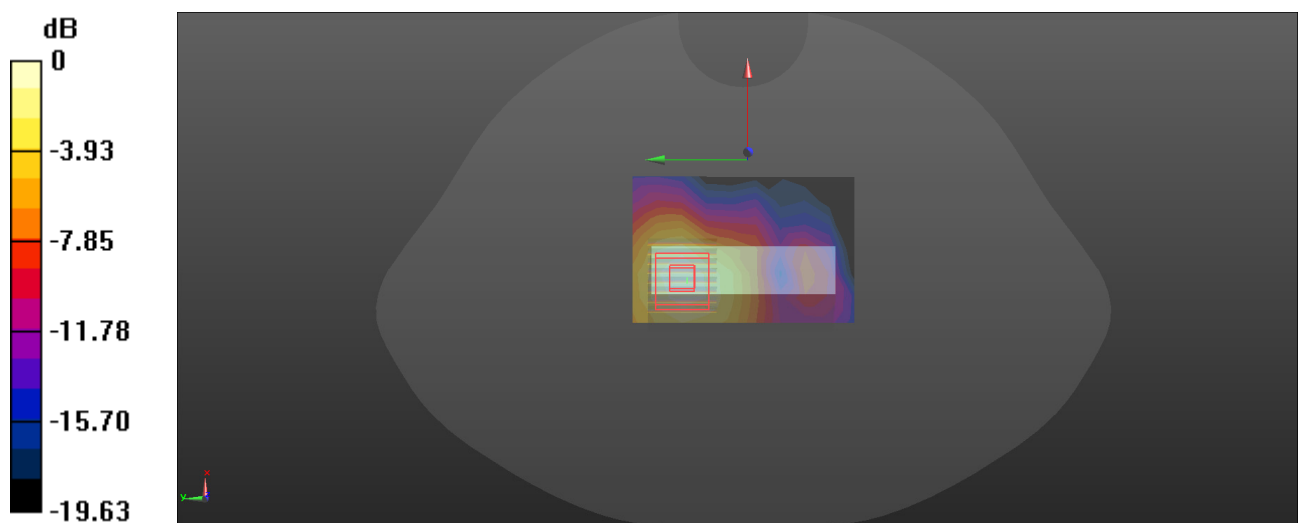

0 dB = 1.06 W/kg = 0.25 dBW/kg

**Plot: 67#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used:  $f = 5815 \text{ MHz}$ ;  $\sigma = 5.251 \text{ S/m}$ ;  $\epsilon_r = 35.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.9G 802.11ac160 Mid/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.46 W/kg

**Head Left Cheek/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 5.340 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 4.43 W/kg

**SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.441 W/kg**

Maximum value of SAR (measured) = 2.88 W/kg

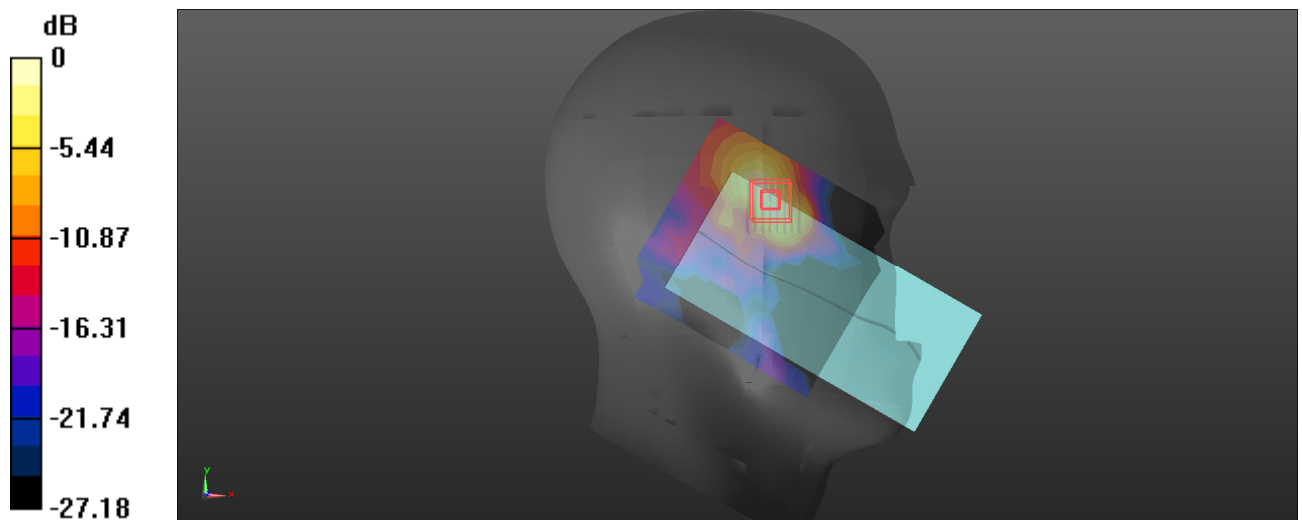

0 dB = 2.88 W/kg = 4.59 dBW/kg

**Plot: 68#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used:  $f = 5815 \text{ MHz}$ ;  $\sigma = 5.251 \text{ S/m}$ ;  $\epsilon_r = 35.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.9G 802.11ac160 Mid/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.19 W/kg


**Head Left Tilt/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 4.077 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.80 W/kg

**SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 1.21 W/kg

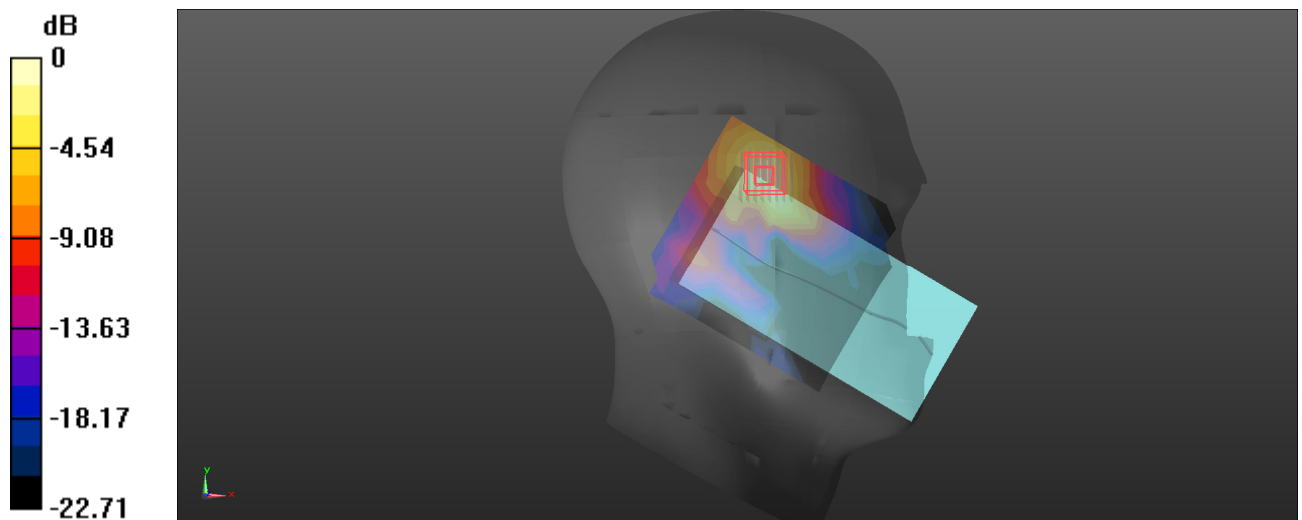

0 dB = 1.21 W/kg = 0.83 dBW/kg

**Plot: 69#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used:  $f = 5815 \text{ MHz}$ ;  $\sigma = 5.251 \text{ S/m}$ ;  $\epsilon_r = 35.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.9G 802.11ac160 Mid/Area Scan (12x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.984 W/kg

**Head Right Cheek/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 5.696 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.175 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

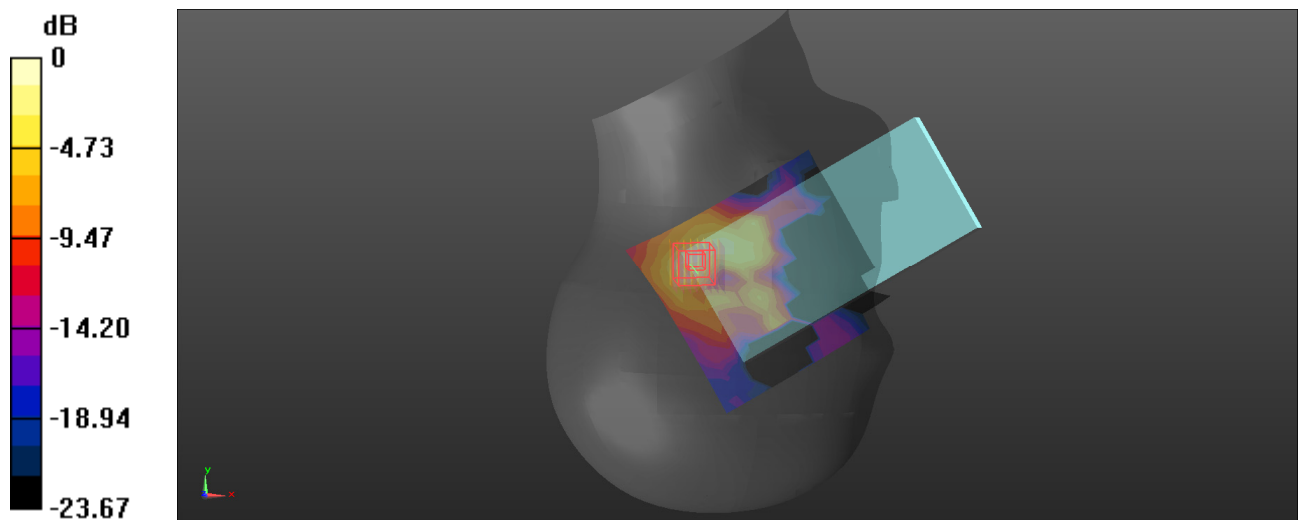

0 dB = 1.04 W/kg = 0.17 dBW/kg

**Plot: 70#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used:  $f = 5815 \text{ MHz}$ ;  $\sigma = 5.251 \text{ S/m}$ ;  $\epsilon_r = 35.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 5.9G 802.11ac160 Mid/Area Scan (12x13x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.07 W/kg

**Head Right Tilt/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,


$dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 5.024 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.57 W/kg

**SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.206 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

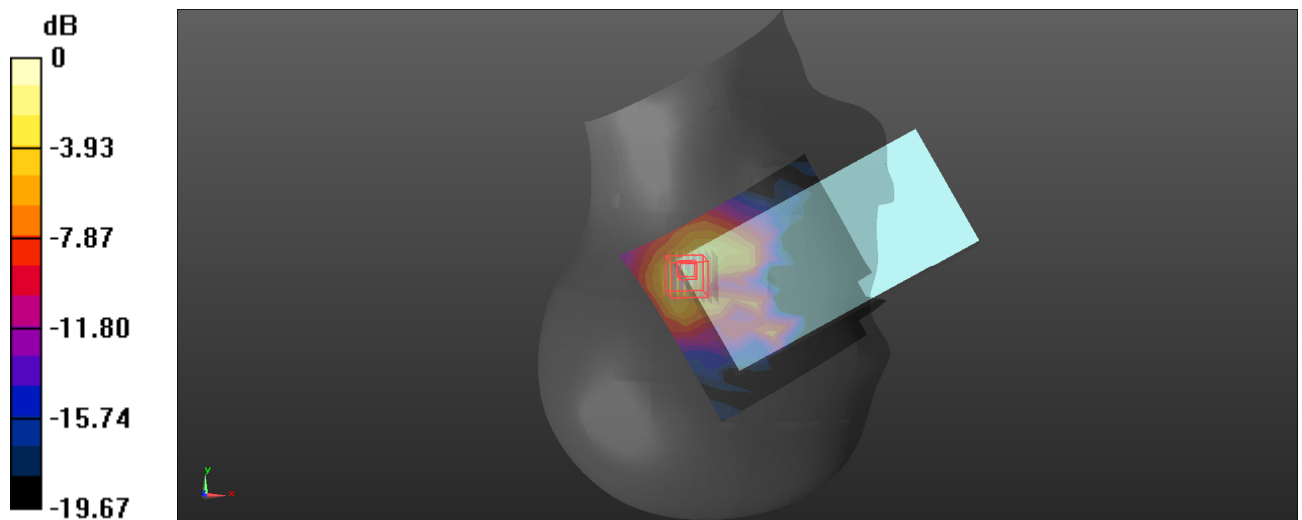

0 dB = 1.11 W/kg = 0.45 dBW/kg

**Plot: 71#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used:  $f = 5815 \text{ MHz}$ ;  $\sigma = 5.251 \text{ S/m}$ ;  $\epsilon_r = 35.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 5.9G 802.11ac160 Mid/Area Scan (11x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.552 W/kg


**Body Front/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 0.9380 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.747 W/kg

**SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.530 W/kg

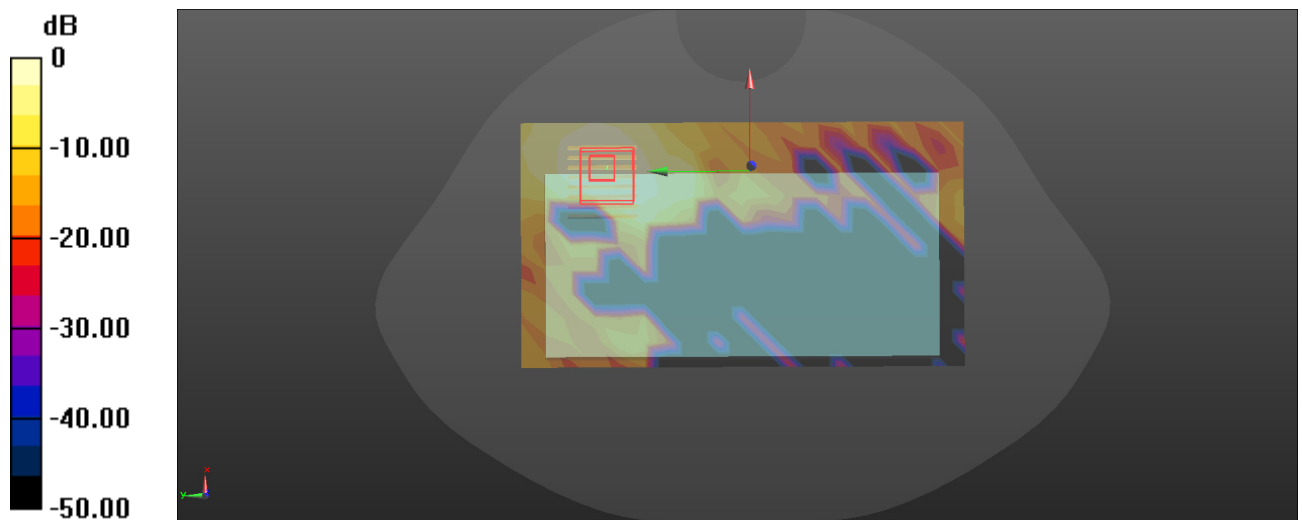

0 dB = 0.530 W/kg = -2.76 dBW/kg

**Plot: 72#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used:  $f = 5815 \text{ MHz}$ ;  $\sigma = 5.251 \text{ S/m}$ ;  $\epsilon_r = 35.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.9G 802.11ac160 Mid/Area Scan (11x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.06 W/kg


**Body Back/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 1.519 V/m; Power Drift = -0.12dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.190 W/kg**

Maximum value of SAR (measured) = 1.03 W/kg

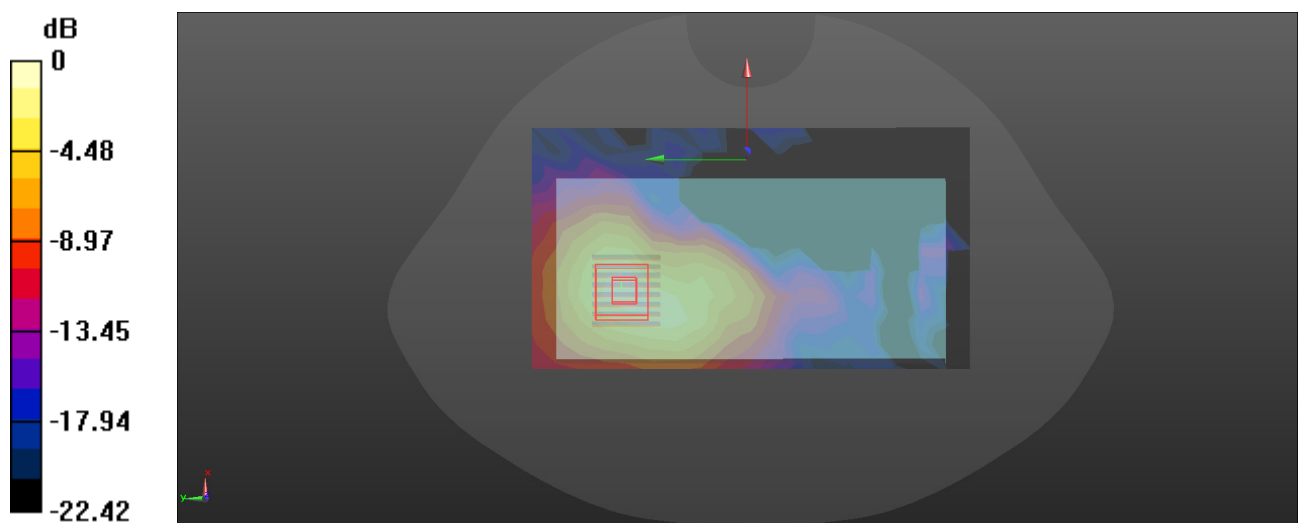

0 dB = 1.03 W/kg = 0.13 dBW/kg



**Plot: 73#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used:  $f = 5815 \text{ MHz}$ ;  $\sigma = 5.251 \text{ S/m}$ ;  $\epsilon_r = 35.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Right/WLAN 5.9G 802.11ac160 Mid/Area Scan (7x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.850 W/kg


**Body Right/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 2.110 V/m; Power Drift = -0.12dB

Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.171 W/kg**

Maximum value of SAR (measured) = 0.863 W/kg

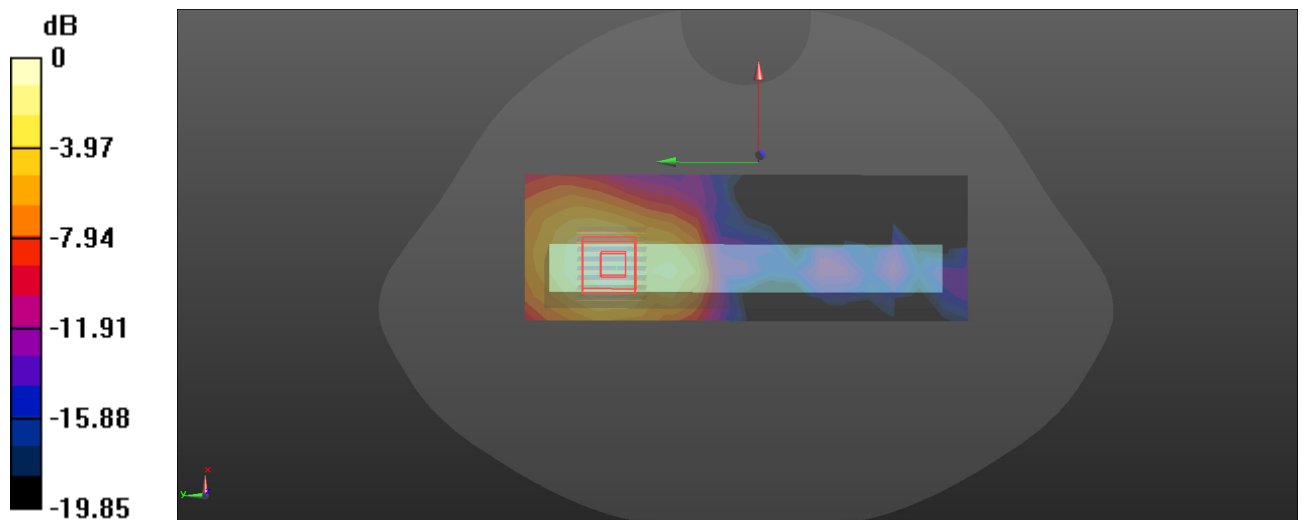

0 dB = 0.863 W/kg = -0.64 dBW/kg

**Plot: 74#**

**DUT: Wi-Fi Smartphone; Type: WP856; Serial: 2PB0-1**

Communication System: UID 0, 5.9G Wi-Fi (0); Frequency: 5815 MHz;Duty Cycle: 1:1.034

Medium parameters used:  $f = 5815 \text{ MHz}$ ;  $\sigma = 5.251 \text{ S/m}$ ;  $\epsilon_r = 35.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08)@ 5815 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Top/WLAN 5.9G 802.11ac160 Mid/Area Scan (7x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.865 W/kg


**Body Top/WLAN 5.9G 802.11ac160 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.953 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.166 W/kg**

Maximum value of SAR (measured) = 0.825 W/kg

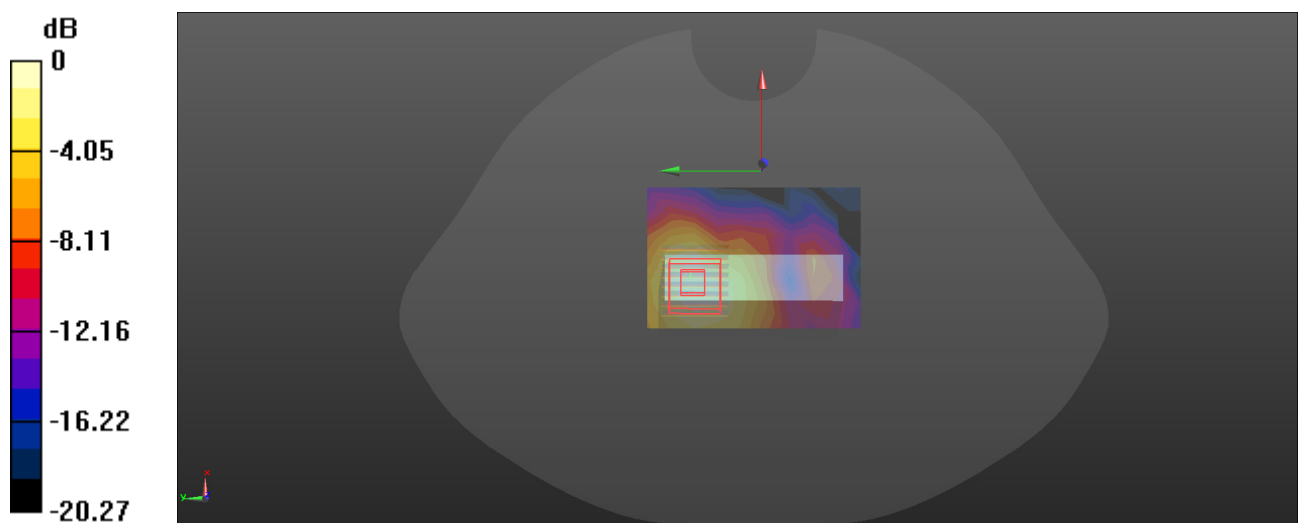

0 dB = 0.825 W/kg = -0.84 dBW/kg