

SUBMITTAL APPLICATION REPORT

FOR GRANT OF CERTIFICATION

FOR

Model: ARCFlex 802.11 abgn Module
Broadband Digital Transmission System
2412-2462 MHz, 2422-2452 MHz (802.11n Mode),
5745-5825 MHz, 5755-5805 (802.11n Mode)


FCC ID: Z2B-AFM2


FOR

ARC WIRELESS LLC

6330 N. Washington St., Unit 13
Denver, CO 80216

Test Report Number: 111109A

Authorized Signatory: 
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Engineering Test Report For Grant of Certification Application

FOR
CFR 47, PART 15C - Intentional Radiators
CFR 47 Paragraph 15.247
License Exempt Intentional Radiator

For

ARC WIRELESS LLC

6330 N. Washington St., Unit 13
Denver, CO 80216

Model: ARCFlex 802.11 abgn Module
Frequency Range 2412-2462 MHz, 2422-2452 MHz (802.11n mode)
5745-5825 MHz, 5755-5805 MHz (802.11n Mode)
FCC ID#: Z2B-AFM2

Test Date: November 9, 2011

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product endorsement by NVLAP, NIST, or
any agency of the U.S. Government.



Table Of Contents

TABLE OF CONTENTS..... 3

FORWARD 9

OPINION / INTERPRETATION OF RESULTS 9

ENVIRONMENTAL CONDITIONS..... 9

EQUIPMENT TESTED..... 9

APPLICATION FOR CERTIFICATION..... 10

APPLICABLE STANDARDS & TEST PROCEDURES 11

EQUIPMENT FUNCTION AND CONFIGURATION..... 11

Equipment Configuration.....12

TEST SITE LOCATIONS 12

UNITS OF MEASUREMENTS 12

TEST PROCEDURES..... 13

AC Line Conducted Emission Test Procedure13

Radiated Emission Test Procedure.....13

LIST OF TEST EQUIPMENT 14

INTENTIONAL RADIATORS..... 15

Antenna Requirements15

Restricted Bands of Operation.....15

 Radiated Emissions in Restricted Bands Data (General Emission both configurations)15

 Radiated Emissions in Restricted Bands Data (2.4 GHz Transmit configuration)16

 Radiated Emissions in Restricted Bands Data (5 GHz Transmit configuration)16

Summary of Results for Radiated Emissions in Restricted Bands17

AC Line Conducted Emissions Procedure17

 Figure 1 AC Line Conducted Emissions Line 1 (CPU/EUT 1)18

 Figure 2 AC Line Conducted Emissions Line 2 (CPU/EUT 1)18

 AC Line Conducted Emissions Data19



Summary of Results for AC Line Conducted Emissions19

General Radiated Emissions Procedure.....20

 General Radiated Emissions from EUT Data (2.4 GHz Transmitter Operation).....21

 General Radiated Emissions from EUT Data (5 GHz Transmitter Operation).....21

Summary of Results for General Radiated Emissions22

Operation in the Frequency Bands of 2400 – 2483.5 MHz and 5725-5850 MHz22

 Figure 3 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode, 2412 MHz, Chain 0).....23

 Figure 4 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2437 MHz, Chain 0).....23

 Figure 5 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2462 MHz, Chain 0).....23

 Figure 6 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2412 MHz, Chain 1).....24

 Figure 7 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2437 MHz, Chain 1).....24

 Figure 8 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2462 MHz, Chain 1).....24

 Figure 9 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2412 MHz, Chain 0)25

 Figure 10 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2437 MHz, Chain 0).....25

 Figure 11 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2462 MHz, Chain 0).....25

 Figure 12 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2412 MHz, Chain 1).....26

 Figure 13 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2437 MHz, Chain 1).....26

 Figure 14 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2462 MHz, Chain 1).....26

 Figure 15 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2422 MHz, Chain 0).....27

 Figure 16 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2437 MHz, Chain 0).....27

 Figure 17 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2452 MHz, Chain 0).....27

 Figure 18 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2422 MHz, Chain 1).....28

 Figure 19 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2437 MHz, Chain 1).....28

 Figure 20 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2452 MHz, Chain 1).....28

 Figure 21 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5745 MHz, Chain 0).....29

 Figure 22 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5785 MHz, Chain 0).....29

 Figure 23 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5825 MHz, Chain 0).....29

 Figure 24 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5745 MHz, Chain 1).....30

 Figure 25 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5785 MHz, Chain 1).....30

 Figure 26 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5825 MHz, Chain 1).....30

 Figure 27 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5745 MHz, Chain 0).....31

 Figure 28 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5785 MHz, Chain 0).....31

 Figure 29 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5825 MHz, Chain 0).....31

 Figure 30 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5745 MHz, Chain 1).....32

 Figure 31 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5785 MHz, Chain 1).....32

 Figure 32 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5825 MHz, Chain 1).....32

 Figure 33 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5755 MHz, Chain 0)33

 Figure 34 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5785 MHz, Chain 0)33

 Figure 35 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5805 MHz, Chain 0)33

 Figure 36 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5755 MHz, Chain 1)34



Figure 37 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5785 MHz, Chain 1)34

Figure 38 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5805 MHz, Chain 1)34

Figure 39 Plot of 6dB Band width (20 MHz CCK Mode, 2412 MHz, Chain 0)35

Figure 40 Plot of 6dB Band width (20 MHz CCK Mode, 2437 MHz, Chain 0)35

Figure 41 Plot of 6dB Band width (20 MHz CCK Mode, 2462 MHz, Chain 0)36

Figure 42 Plot of 6dB Band width (20 MHz CCK Mode, 2412 MHz, Chain 1)36

Figure 43 Plot of 6dB Band width (20 MHz CCK Mode, 2437 MHz, Chain 1)37

Figure 44 Plot of 6dB Band width (20 MHz CCK Mode, 2462 MHz, Chain 1)37

Figure 45 Plot of 6dB Band width (20 MHz OFDM Mode, 2412 MHz, Chain 0).....38

Figure 46 Plot of 6dB Band width (20 MHz OFDM Mode, 2437 MHz, Chain 0).....38

Figure 47 Plot of 6dB Band width (20 MHz OFDM Mode, 2462 MHz, Chain 0).....39

Figure 48 Plot of 6dB Band width (20 MHz OFDM Mode, 2412 MHz, Chain 1).....39

Figure 49 Plot of 6dB Band width (20 MHz OFDM Mode, 2437 MHz, Chain 1).....40

Figure 50 Plot of 6dB Band width (20 MHz OFDM Mode, 2462 MHz, Chain 1).....40

Figure 51 Plot of 6dB Band width (40 MHz N Mode, 2422 MHz, Chain 0).....41

Figure 52 Plot of 6dB Band width (40 MHz N Mode, 2437 MHz, Chain 0).....41

Figure 53 Plot of 6dB Band width (40 MHz N Mode, 2452 MHz, Chain 0).....42

Figure 54 Plot of 6dB Band width (40 MHz N Mode, 2422 MHz, Chain 1).....42

Figure 55 Plot of 6dB Band width (40 MHz N Mode, 2437 MHz, Chain 1).....43

Figure 56 Plot of 6dB Band width (40 MHz N Mode, 2452 MHz, Chain 1).....43

Figure 57 Plot of 6dB Band width (20 MHz CCK Mode, 5745 MHz, Chain 0)44

Figure 58 Plot of 6dB Band width (20 MHz CCK Mode, 5785 MHz, Chain 0)44

Figure 59 Plot of 6dB Band width (20 MHz CCK Mode, 5825 MHz, Chain 0)45

Figure 60 Plot of 6dB Band width (20 MHz CCK Mode, 5745 MHz, Chain 1)45

Figure 61 Plot of 6dB Band width (20 MHz CCK Mode, 5785 MHz, Chain 1)46

Figure 62 Plot of 6dB Band width (20 MHz CCK Mode, 5825 MHz, Chain 1)46

Figure 63 Plot of 6dB Band width (20 MHz OFDM Mode, 5745 MHz, Chain 0).....47

Figure 64 Plot of 6dB Band width (20 MHz OFDM Mode, 5785 MHz, Chain 0).....47

Figure 65 Plot of 6dB Band width (20 MHz OFDM Mode, 5825 MHz, Chain 0).....48

Figure 66 Plot of 6dB Band width (20 MHz OFDM Mode, 5745 MHz, Chain 1).....48

Figure 67 Plot of 6dB Band width (20 MHz OFDM Mode, 5785 MHz, Chain 1).....49

Figure 68 Plot of 6dB Band width (20 MHz OFDM Mode, 5825 MHz, Chain 1).....49

Figure 69 Plot of 6dB Band width (40 MHz N Mode, 5755 MHz, Chain 0).....50

Figure 70 Plot of 6dB Band width (40 MHz N Mode, 5785 MHz, Chain 0).....50

Figure 71 Plot of 6dB Band width (40 MHz N Mode, 5805 MHz, Chain 0).....51

Figure 72 Plot of 6dB Band width (40 MHz N Mode, 5755 MHz, Chain 1).....51

Figure 73 Plot of 6dB Band width (40 MHz N Mode, 5785 MHz, Chain 1).....52

Figure 74 Plot of 6dB Band width (40 MHz N Mode, 5805 MHz, Chain 1).....52

Figure 75 Plot of Power Spectral Density (20 MHz CCK Mode, 2412 MHz, Chain 0).....53

Figure 76 Plot of Power Spectral Density (20 MHz CCK Mode, 2437 MHz, Chain 0).....53

Figure 77 Plot of Power Spectral Density (20 MHz CCK Mode, 2462 MHz, Chain 0).....54



Figure 78 Plot of Power Spectral Density (20 MHz CCK Mode, 2412 MHz, Chain 1).....54

Figure 79 Plot of Power Spectral Density (20 MHz CCK Mode, 2437 MHz, Chain 1).....55

Figure 80 Plot of Power Spectral Density (20 MHz CCK Mode, 2462 MHz, Chain 1).....55

Figure 81 Plot of Power Spectral Density (20 MHz OFDM Mode, 2412 MHz, Chain 0).....56

Figure 82 Plot of Power Spectral Density (20 MHz OFDM Mode, 2437 MHz, Chain 0).....56

Figure 83 Plot of Power Spectral Density (20 MHz OFDM Mode, 2462 MHz, Chain 0).....57

Figure 84 Plot of Power Spectral Density (20 MHz OFDM Mode, 2412 MHz, Chain 1).....57

Figure 85 Plot of Power Spectral Density (20 MHz OFDM Mode, 2437 MHz, Chain 1).....58

Figure 86 Plot of Power Spectral Density (20 MHz OFDM Mode, 2462 MHz, Chain 1).....58

Figure 87 Plot of Power Spectral Density (40 MHz N Mode, 2422 MHz, Chain 0)59

Figure 88 Plot of Power Spectral Density (40 MHz N Mode, 2437 MHz, Chain 0)59

Figure 89 Plot of Power Spectral Density (40 MHz N Mode, 2452 MHz, Chain 0)60

Figure 90 Plot of Power Spectral Density (40 MHz N Mode, 2422 MHz, Chain 1)60

Figure 91 Plot of Power Spectral Density (40 MHz N Mode, 2437 MHz, Chain 1)61

Figure 92 Plot of Power Spectral Density (40 MHz N Mode, 2452 MHz, Chain 1)61

Figure 93 Plot of Power Spectral Density (20 MHz CCK Mode, 5745 MHz, Chain 0).....62

Figure 94 Plot of Power Spectral Density (20 MHz CCK Mode, 5785 MHz, Chain 0).....62

Figure 95 Plot of Power Spectral Density (20 MHz CCK Mode, 5825 MHz, Chain 0).....63

Figure 96 Plot of Power Spectral Density (20 MHz CCK Mode, 5745 MHz, Chain 1).....63

Figure 97 Plot of Power Spectral Density (20 MHz CCK Mode, 5785 MHz, Chain 1).....64

Figure 98 Plot of Power Spectral Density (20 MHz CCK Mode, 5825 MHz, Chain 1).....64

Figure 99 Plot of Power Spectral Density (20 MHz OFDM Mode, 5745 MHz, Chain 0).....65

Figure 100 Plot of Power Spectral Density (20 MHz OFDM Mode, 5785 MHz, Chain 0).....65

Figure 101 Plot of Power Spectral Density (20 MHz OFDM Mode, 5825 MHz, Chain 0).....66

Figure 102 Plot of Power Spectral Density (20 MHz OFDM Mode, 5745 MHz, Chain 1).....66

Figure 103 Plot of Power Spectral Density (20 MHz OFDM Mode, 5785 MHz, Chain 1).....67

Figure 104 Plot of Power Spectral Density (20 MHz OFDM Mode, 5825 MHz, Chain 1).....67

Figure 105 Plot of Power Spectral Density (40 MHz N Mode, 5755 MHz, Chain 0)68

Figure 106 Plot of Power Spectral Density (40 MHz N Mode, 5785 MHz, Chain 0)68

Figure 107 Plot of Power Spectral Density (40 MHz N Mode, 5805 MHz, Chain 0)69

Figure 108 Plot of Power Spectral Density (40 MHz N Mode, 5755 MHz, Chain 1)69

Figure 109 Plot of Power Spectral Density (40 MHz N Mode, 5785 MHz, Chain 1)70

Figure 110 Plot of Power Spectral Density (40 MHz N Mode, 5805 MHz, Chain 1)70

Figure 111 Plot of Low Band Edge Compliance (20MHz CCK Mode, 2412 MHz, Chain 0)71

Figure 112 Plot of Low Band Edge Compliance (20MHz CCK Mode, 2412 MHz, Chain 1)71

Figure 113 Plot of Low Band Edge Compliance (20MHz OFDM Mode, 2412 MHz, Chain 0)72

Figure 114 Plot of Low Band Edge Compliance (20MHz OFDM Mode, 2412 MHz, Chain 1)72

Figure 115 Plot of High Band Edge Compliance (20MHz CCK Mode, 2462 MHz, Chain 0).....73

Figure 116 Plot of High Band Edge Compliance (20MHz CCK Mode, 2462 MHz, Chain 1).....73

Figure 117 Plot of High Band Edge Compliance (20MHz OFDM Mode, 2462 MHz, Chain 0)74

Figure 118 Plot of High Band Edge Compliance (20MHz OFDM Mode, 2462 MHz, Chain 1)74



Figure 119 Plot of Low Band Edge Compliance (40MHz N Mode, 2422 MHz, Chain 0).....75

Figure 120 Plot of Low Band Edge Compliance (40MHz N Mode, 2422 MHz, Chain 1).....75

Figure 121 Plot of High Band Edge Compliance (40MHz N Mode, 2452 MHz, Chain 0).....76

Figure 122 Plot of High Band Edge Compliance (40MHz N Mode, 2452 MHz, Chain 1).....76

Figure 123 Plot of Low Band Edge Compliance (20MHz CCK Mode, 5745 MHz, Chain 0)77

Figure 124 Plot of Low Band Edge Compliance (20MHz CCK Mode, 5745 MHz, Chain 1)77

Figure 125 Plot of Low Band Edge Compliance (20MHz OFDM Mode, 5745 MHz, Chain 0).....78

Figure 126 Plot of Low Band Edge Compliance (20MHz OFDM Mode, 5745 MHz, Chain 1).....78

Figure 127 Plot of High Band Edge Compliance (20MHz CCK Mode, 5825 MHz, Chain 0).....79

Figure 128 Plot of High Band Edge Compliance (20MHz CCK Mode, 5825 MHz, Chain 1).....79

Figure 129 Plot of High Band Edge Compliance (20MHz OFDM Mode, 5825 MHz, Chain 0)80

Figure 130 Plot of High Band Edge Compliance (20MHz OFDM Mode, 5825 MHz, Chain 1)80

Figure 131 Plot of Low Band Edge Compliance (40MHz N Mode, 5755 MHz, Chain 0).....81

Figure 132 Plot of Low Band Edge Compliance (40MHz N Mode, 5755 MHz, Chain 1).....81

Figure 133 Plot of High Band Edge Compliance (40MHz N Mode, 5805 MHz, Chain 0).....82

Figure 134 Plot of High Band Edge Compliance (40MHz N Mode, 5805 MHz, Chain 1).....82

Figure 135 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0).....83

Figure 136 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0).....83

Figure 137 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0).....84

Figure 138 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0).....84

Figure 139 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0).....85

Figure 140 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0).....85

Figure 141 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1).....86

Figure 142 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1).....86

Figure 143 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1).....87

Figure 144 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1).....87

Figure 145 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1).....88

Figure 146 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1).....88

Figure 147 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0).....89

Figure 148 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0).....89

Figure 149 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0).....90

Figure 150 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0).....90

Figure 151 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0).....91

Figure 152 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0).....91

Figure 153 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0).....92

Figure 154 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0).....92

Figure 155 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1).....93

Figure 156 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1).....93

Figure 157 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1).....94

Figure 158 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1).....94

Figure 159 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1).....95



Figure 160 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)95

Figure 161 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)96

Figure 162 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)96

Transmitter Emissions Data.....97

2412-2462 MHz Transmitter Data Summary (Chain 0)97

2412-2462 MHz Transmitter Data Summary (Chain 1)97

5745-5825 MHz Transmitter Data Summary (Chain 0)98

5745-5825 MHz Transmitter Data Summary (Chain 1)98

Transmitter Total Power Spectral Density Data (Both Chains 2412-2462 MHz)99

Transmitter Total Power Spectral Density Data (Both Chains 5745-5825 MHz)99

Transmitter Antenna Port Harmonic Emissions Data (2412-2462 MHz CCK, Chain 0).....100

Transmitter Antenna Port Harmonic Emissions Data (2412-2462 MHz CCK, Chain 1).....100

Transmitter Antenna Port Harmonic Emissions Data (2412-2462 MHz OFDM, Chain 0)101

Transmitter Antenna Port Harmonic Emissions Data (2412-2462 MHz OFDM, Chain 1)101

Transmitter Antenna Port Harmonic Emissions Data (5745-5825 MHz CCK, Chain 0).....102

Transmitter Antenna Port Harmonic Emissions Data (5745-5825 MHz CCK, Chain 1).....102

Transmitter Antenna Port Harmonic Emissions Data (5745-5825 MHz OFDM, Chain 0)103

Transmitter Antenna Port Harmonic Emissions Data (5745-5825 MHz OFDM, Chain 1)103

Transmitter Radiated Emission (2412-2462 MHz, Worst-case).....104

Transmitter Radiated Emission (5745-5825 MHz, Worst-case).....104

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator105

STATEMENT OF MODIFICATIONS AND DEVIATIONS 105

ANNEX..... 106

Annex A Measurement Uncertainty Calculations.....107

Annex B Rogers Labs Test Equipment List.....109

Annex C Rogers Qualifications110

Annex D FCC Site Registration Letter.....111

Annex E Industry Canada Site Registration Letter112



Forward

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt Digital Transmission System Intentional Radiator operating under CFR 47 Paragraph 15.247.

Name of Applicant: ARC Wireless LLC
6330 N. Washington St., Unit 13
Denver, CO 80216

Model: ARCFlex 802.11 abgn Module

FCC I.D.: Z2B-AFM2 FRN: 0014 43 1100

Frequency Range: 2412-2462 MHz (802.11 b/g), 2422-2452 MHz (802.11n mode), and 5745-5825 MHz, 5755-5805 MHz (802.11n Mode)

Operating Power: 23 dBm, 0.200-Watts output power single chain

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Emissions as per CFR 47 paragraphs 2 and 15.205	-3.5	Complies
Emissions as per CFR 47 paragraphs 2 and 15.207	-10.3	Complies
Emissions as per CFR 47 paragraphs 2 and 15.209	-3.7	Complies
Emissions as per CFR 47 paragraphs 2 and 15.247	-11.3	Complies

Environmental Conditions

Ambient Temperature 19.7° C
Relative Humidity 32%
Atmospheric Pressure 1026.2 mb

Equipment Tested

<u>Equipment</u>	<u>Model</u>	<u>FCC I.D.</u>
EUT	ARCFlex 802.11 abgn Module	Z2B-AFM2
Dell Studio XPS	921LBN1	N/A

<u>Antenna/Type</u>	<u>Model</u>	<u>Gain</u>
18-dBi Panel (2.4 GHz)	ARC-ID2718B88	18 dBi
24-dBi Panel (5 GHz)	ARC-ID5823B88	24 dBi



Application for Certification

- (1) Manufacturer: ARC Wireless LLC
6330 N. Washington St., Unit 13
Denver, CO 80216
- (2) Identification: Model: ARCFlex 802.11 abgn Module
FCC I.D.: Z2B-AFM2
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from power received from supporting equipment USB interface. Testing was performed with the EUT connected to the computer through USB interface cable. The EUT requires connection to USB interface for power and control. During testing, the EUT was connected to the CPU through the USB cable and external antennas.
- (9) Transition Provisions of CFR47 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.



Applicable Standards & Test Procedures


In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2010, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247 the following information is submitted.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI C63.4-2009 Document, FCC documents KDB 662911 MIMO, KDB 718828, DA00-1407 and DA00-705 and/or TIA/EIA 603-1. Testing for the AC line-conducted emissions were performed as defined in sections 7 and 13.1.3, testing of the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4-2009. Testing of the intentional radiated emissions was performed as defined in section 13 of ANSI C63.4-2009.

Equipment Function and Configuration

The EUT is a Multiple Input Multiple Output (MIMO) 802.11a/ b/g/n Digital Transmission System modular transmitter operating in the frequency bands of 2412-2462 MHz and 5745-5825 MHz. The module requires USB interface connection with compliant supporting equipment for power and communications. The design utilizes u.fl antenna connection ports for use with authorized antenna systems. The equipment is used to transmit data in applications offering broadband wireless connectivity. The equipment is marketed for use to incorporate a wireless link to exchange data information from one point to another. For testing purposes, the ARCFlex 802.11 abgn Module was connected to the USB port of supporting laptop computer for power and transmitter control. The ARCFlex 802.11 abgn Module receives power from the supporting computer that was powered from manufacturer supplied AC adapter. No other interfacing options are provided. The design is for limited modular use in systems developed and marketed by ARC Wireless LLC. Worst-case emissions data is presented in this report. The device is marketed for OEM use only and complies with unique antenna port requirements.

Equipment Configuration

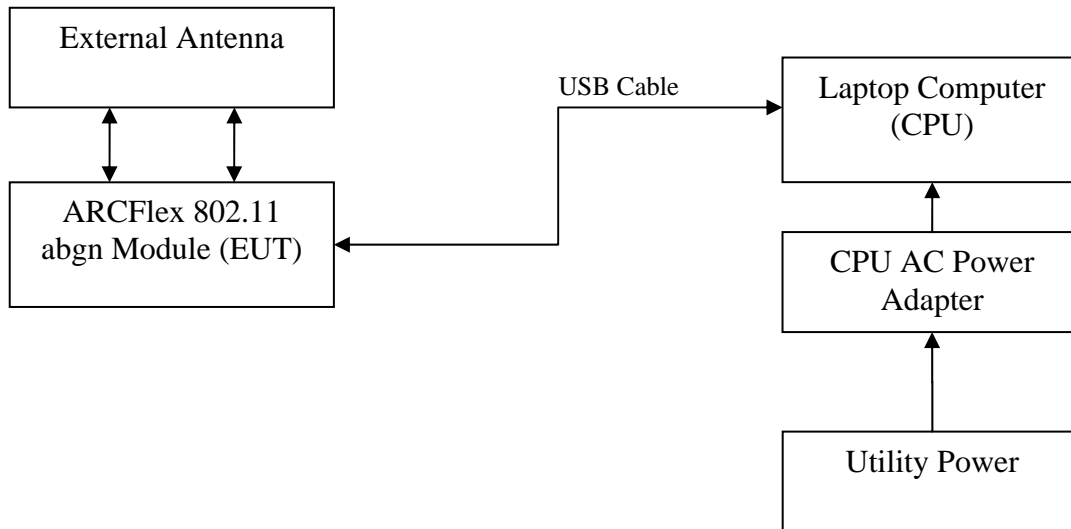

Test Site Locations

- Conducted EMI The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

- Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

- Site Registration Refer to Annex for Site Registration Letters

- NVLAP Accreditation Lab code 200087-0

Units of Measurements

- Conducted EMI Data is in dB μ V; dB referenced to one microvolt

- Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured
 A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

$$RFS \text{ (dB}\mu\text{V/m @ 3m)} = FSM \text{ (dB}\mu\text{V)} + A.F. \text{ (dB)} - \text{Gain (dB)}$$

Test Procedures

AC Line Conducted Emission Test Procedure

The EUT operates from DC power only supplied through USB interface. The EUT must be connected to supporting USB interface circuitry for power. For testing purposes, the manufacturer-supplied sample was interfaced to the supporting laptop computer system for power and transmitter control. The AC power laptop manufacturer supplied AC adapter was tested for AC Line conducted emissions while power the EUT. Testing for the AC line-conducted emissions testing was performed as defined in sections 7 and 13.1.3 of ANSI C63.4-2009. The test setup including the EUT was arranged in typical equipment configurations and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table.

Radiated Emission Test Procedure

The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. Testing for the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4-2009. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in the test setup exhibits for EUT placement during testing.

List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Calibration Date</u>	<u>Due</u>
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/11	10/12
Antenna	ARA	BCD-235-B	10/11	10/12
Antenna	EMCO	3147	10/11	10/12
Antenna	Com Power	AH0-110	10/11	10/12
Antenna	EMCO	3143	5/11	5/12
Analyzer	HP	8591EM	5/11	5/12
Analyzer	HP	8562A	5/11	5/12
Analyzer	Rohde & Schwarz	ESU40	5/11	5/12

Intentional Radiators

As per CFR47, Subpart C, paragraph 15.247 the following information is submitted.

Antenna Requirements

The EUT design incorporates u.fl antenna connection ports for use with authorized antenna systems only. The design will be marketed by OEM only requiring professional installation as described in accompanying documentation. The antenna connection point complies with the unique antenna connection requirements. The requirements for unique antenna connection are fulfilled. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at a distance of three meters on the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were measured at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other significant emission was observed which fell into the restricted bands of operation.

Radiated Emissions in Restricted Bands Data (General Emission both configurations)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
118.0	41.8	28.7	N/A	38.5	27.9	N/A	43.5
120.0	43.2	39.8	N/A	39.5	34.2	N/A	43.5
122.0	39.6	31.4	N/A	36.0	25.4	N/A	43.5
125.0	40.5	31.6	N/A	33.0	23.9	N/A	43.5
133.3	40.0	30.8	N/A	34.0	21.2	N/A	43.5
250.0	45.5	34.5	N/A	44.5	32.2	N/A	46.0
266.3	42.8	31.5	N/A	33.6	23.5	N/A	46.0
333.0	38.6	30.4	N/A	39.5	32.4	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Radiated Emissions in Restricted Bands Data (2.4 GHz Transmit configuration)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	50.7	N/A	41.8	47.3	N/A	40.4	54.0
2483.5	67.6	N/A	50.5	56.0	N/A	40.1	54.0
4824.0	50.0	N/A	37.1	50.1	N/A	37.2	54.0
4874.0	50.2	N/A	36.8	49.4	N/A	36.9	54.0
4924.0	54.0	N/A	16.6	16.1	N/A	36.2	54.0
7236.0	48.8	N/A	35.9	49.5	N/A	35.8	54.0
7311.0	46.4	N/A	33.2	47.2	N/A	33.2	54.0
7386.0	54.0	N/A	16.6	16.1	N/A	33.6	54.0
12060.0	49.7	N/A	36.1	48.9	N/A	36.1	54.0
12185.0	48.1	N/A	35.4	48.1	N/A	35.4	54.0
12310.0	47.7	N/A	35.1	47.9	N/A	35.1	54.0
14472.0	51.1	N/A	38.4	51.5	N/A	38.3	54.0
19296.0	53.9	N/A	41.2	54.1	N/A	41.3	54.0
19496.0	55.7	N/A	42.7	56.2	N/A	42.8	54.0
19696.0	55.1	N/A	42.4	55.0	N/A	42.4	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Radiated Emissions in Restricted Bands Data (5 GHz Transmit configuration)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
11490.0	49.2	N/A	35.5	51.0	N/A	37.2	54.0
11570.0	49.7	N/A	36.2	49.5	N/A	36.1	54.0
11650.0	54.0	N/A	16.6	16.1	N/A	35.8	54.0
22980.0	38.5	N/A	24.9	38.7	N/A	25.0	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of CFR 47 Part 15C Intentional Radiators. The EUT demonstrated a minimum margin of -3.5 dB below the radiated emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted Emissions Procedure

The EUT was arranged in the test configuration described above emulating worst-case equipment configuration. This configuration was placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. The manufacturer supplied POE power adapter was connected to the LISN. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor, internal to the LISN. Power line conducted emissions testing were carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each radio frequency emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures one and two for plots of the EUT powered by support computer USB port and computer AC adapter for Power Line conducted emissions.

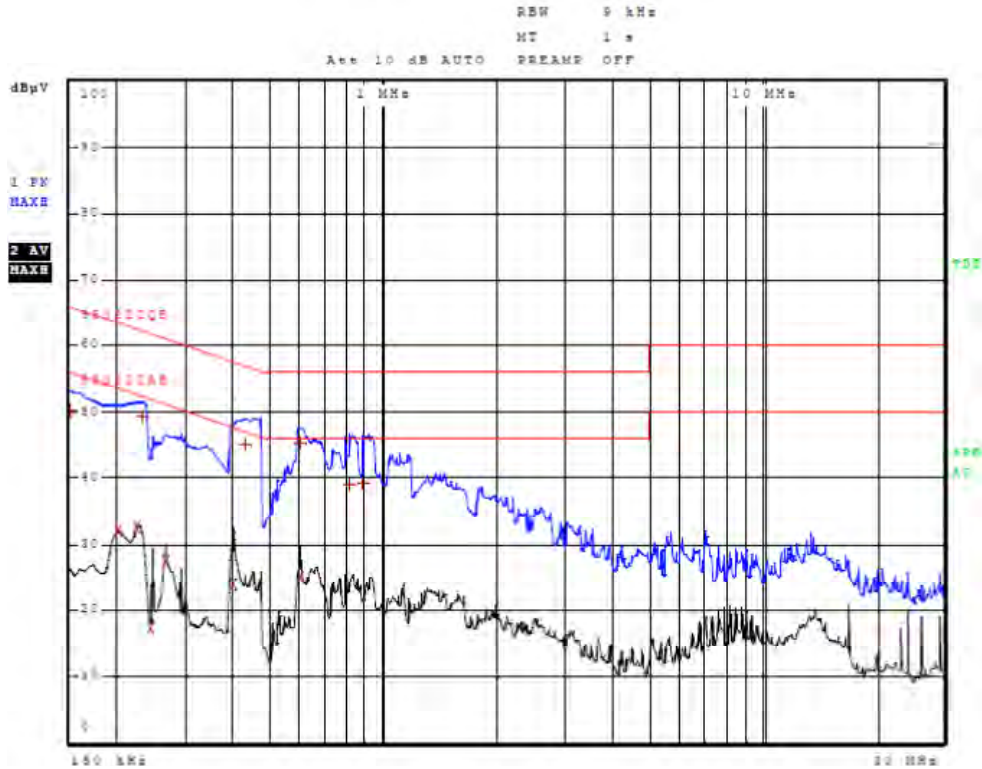


Figure 1 AC Line Conducted Emissions Line 1 (CPU/EUT 1)

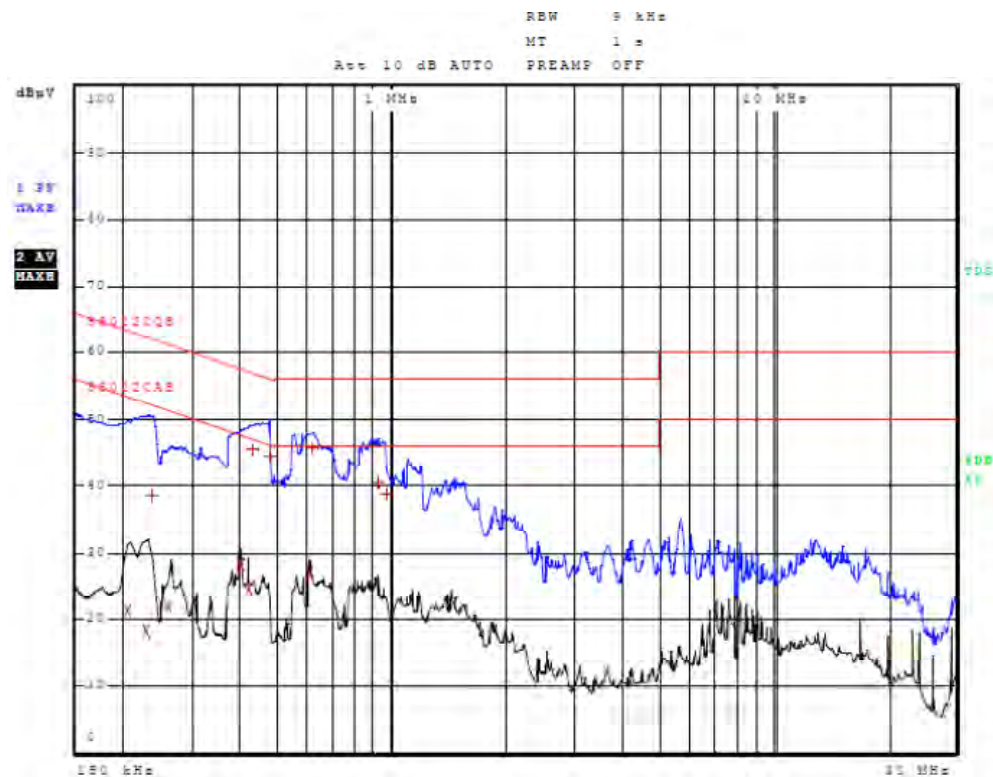


Figure 2 AC Line Conducted Emissions Line 2 (CPU/EUT 1)



AC Line Conducted Emissions Data

Line 1

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	50.06	Quasi Peak	-15.94
2	202.000000000 kHz	31.97	Average	-21.56
2	226.000000000 kHz	32.76	Average	-19.83
1	234.000000000 kHz	49.18	Quasi Peak	-13.12
2	246.000000000 kHz	17.29	Average	-34.60
2	266.000000000 kHz	27.50	Average	-23.74
2	398.000000000 kHz	23.95	Average	-23.94
1	430.000000000 kHz	45.12	Quasi Peak	-12.13
2	602.000000000 kHz	25.10	Average	-20.90
1	602.000000000 kHz	45.26	Quasi Peak	-10.74
1	810.000000000 kHz	39.00	Quasi Peak	-17.00
1	878.000000000 kHz	39.18	Quasi Peak	-16.82

Line 2

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	206.000000000 kHz	21.28	Average	-32.08
2	230.000000000 kHz	18.46	Average	-33.99
1	238.000000000 kHz	38.59	Quasi Peak	-23.58
2	262.000000000 kHz	22.05	Average	-29.32
2	398.000000000 kHz	28.35	Average	-19.55
2	418.000000000 kHz	24.67	Average	-22.82
1	430.000000000 kHz	45.46	Quasi Peak	-11.79
1	478.000000000 kHz	44.34	Quasi Peak	-12.03
2	606.000000000 kHz	27.09	Average	-18.91
1	614.000000000 kHz	45.67	Quasi Peak	-10.33
1	922.000000000 kHz	40.70	Quasi Peak	-15.30
1	966.000000000 kHz	38.73	Quasi Peak	-17.27

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT demonstrated compliance to the conducted emissions requirements of CFR47 Part 15C equipment. The EUT demonstrated minimum margin of -10.3 dB below the limit.

Measurements were taken using the peak, quasi peak, and average, measurement function for each emissions amplitude and were below the limits stated in the specification. Other emissions were present with recorded data representing worst-case amplitudes.



General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all available modes with worst-case data recorded. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Data was taken for the radiated frequency spectrum from 9 kHz to 55,000 MHz during preliminary investigation. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 60,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers from 1 GHz to 60 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

General Radiated Emissions from EUT Data (2.4 GHz Transmitter Operation)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
69.2	42.8	28.9	N/A	35.1	24.1	N/A	40.0
122.0	39.6	31.4	N/A	36.0	25.4	N/A	43.5
125.0	40.5	31.6	N/A	33.0	23.9	N/A	43.5
133.3	40.0	30.8	N/A	34.0	21.2	N/A	43.5
155.4	35.5	22.9	N/A	30.5	20.5	N/A	43.5
177.4	30.0	20.5	N/A	24.3	16.9	N/A	43.5
216.0	39.1	28.6	N/A	30.5	23.1	N/A	43.5
232.0	42.4	32.7	N/A	40.2	24.1	N/A	46.0
233.0	43.8	35.6	N/A	38.0	30.8	N/A	46.0
266.3	42.8	31.5	N/A	33.6	23.5	N/A	46.0
333.0	38.6	30.4	N/A	39.5	32.4	N/A	46.0
422.3	38.9	31.8	N/A	42.9	36.7	N/A	46.0
492.3	36.7	30.5	N/A	45.0	39.2	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

General Radiated Emissions from EUT Data (5 GHz Transmitter Operation)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
118.0	41.8	28.7	N/A	38.5	27.9	N/A	43.5
120.0	43.2	39.8	N/A	39.5	34.2	N/A	43.5
144.0	43.9	32.8	N/A	44.0	33.8	N/A	43.5
221.1	40.2	29.2	N/A	38.3	28.0	N/A	46.0
221.5	39.9	29.7	N/A	40.7	31.0	N/A	46.0
233.0	42.7	33.6	N/A	42.2	33.1	N/A	46.0
250.0	45.5	34.5	N/A	44.5	32.2	N/A	46.0
284.4	43.1	32.7	N/A	42.9	31.6	N/A	46.0
300.0	37.0	27.3	N/A	37.3	28.6	N/A	46.0
360.0	41.8	36.2	N/A	39.0	28.7	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209 Intentional Radiators. The EUT demonstrated a minimum margin of -3.7 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Frequency Bands of 2400 – 2483.5 MHz and 5725-5850 MHz

The power output and emissions were measured at the antenna port and on the OATS range in compliance with regulation. The equipment utilizes u.fl antenna connection ports for either transmit or receive. The EUT and test configurations were placed on a wooden turntable 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz including were measured using a spectrum analyzer. Data was recorded from the analyzer measurement result. Antennas used for radiated emissions testing were Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers from 1 GHz to 60 GHz, notch filters, and appropriate amplifiers were utilized. Plots were made of transmitter antenna port conducted performance taken in a screen room. Refer to figures 3 through 162 showing plots of the EUT emissions performance displaying compliance with the specifications.

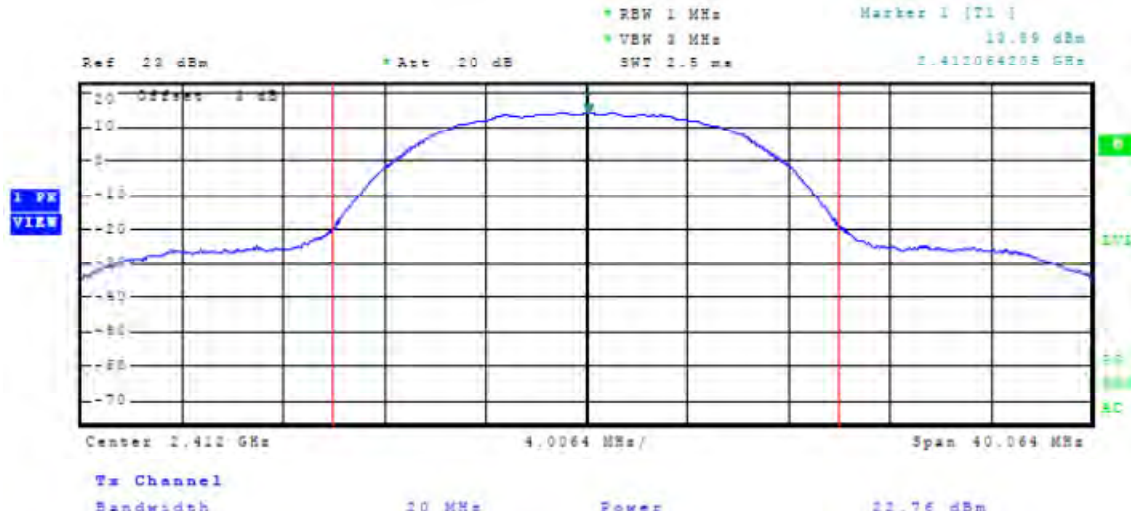


Figure 3 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode, 2412 MHz, Chain 0)

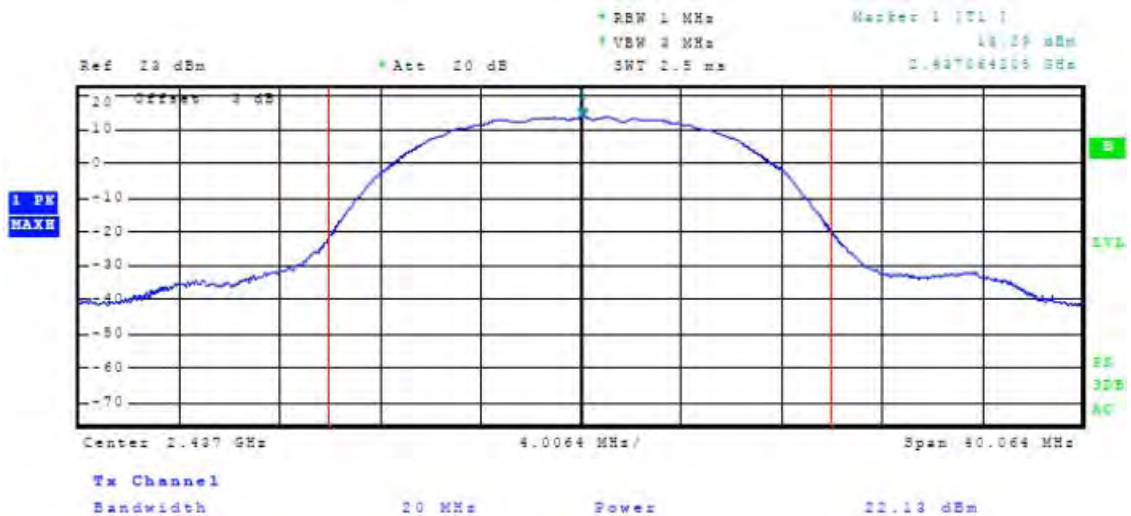


Figure 4 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2437 MHz, Chain 0)

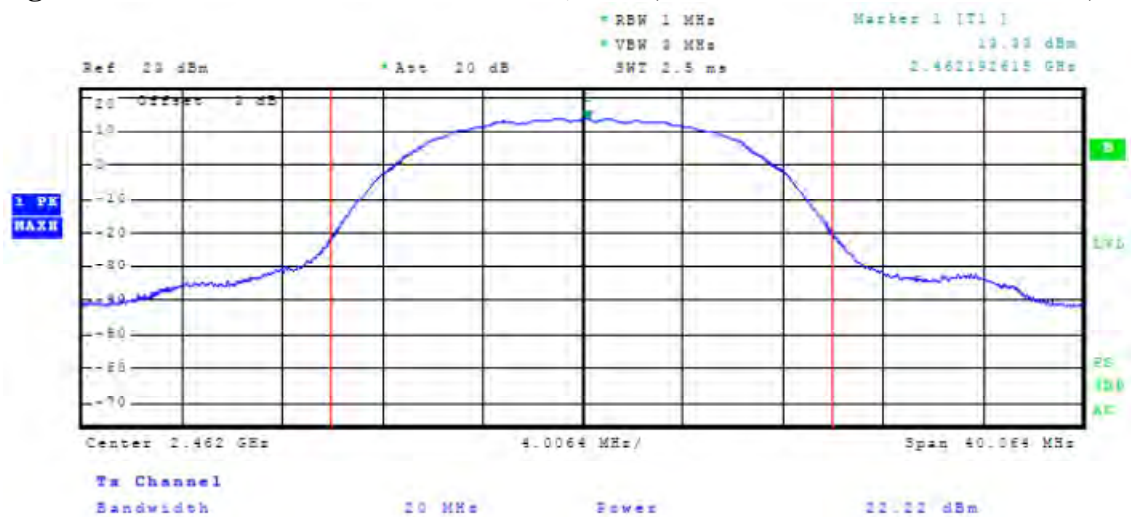


Figure 5 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2462 MHz, Chain 0)

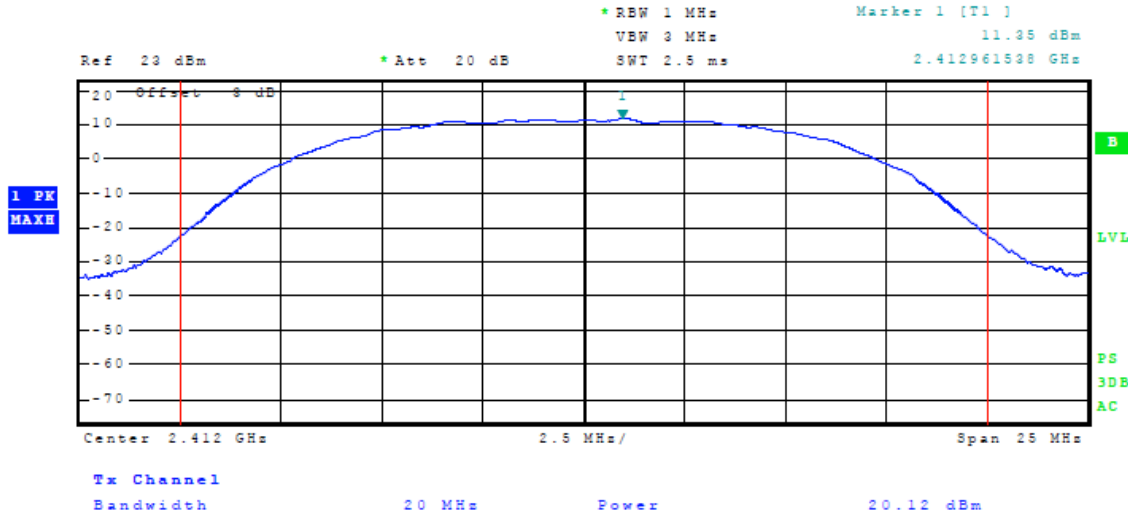


Figure 6 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2412 MHz, Chain 1)

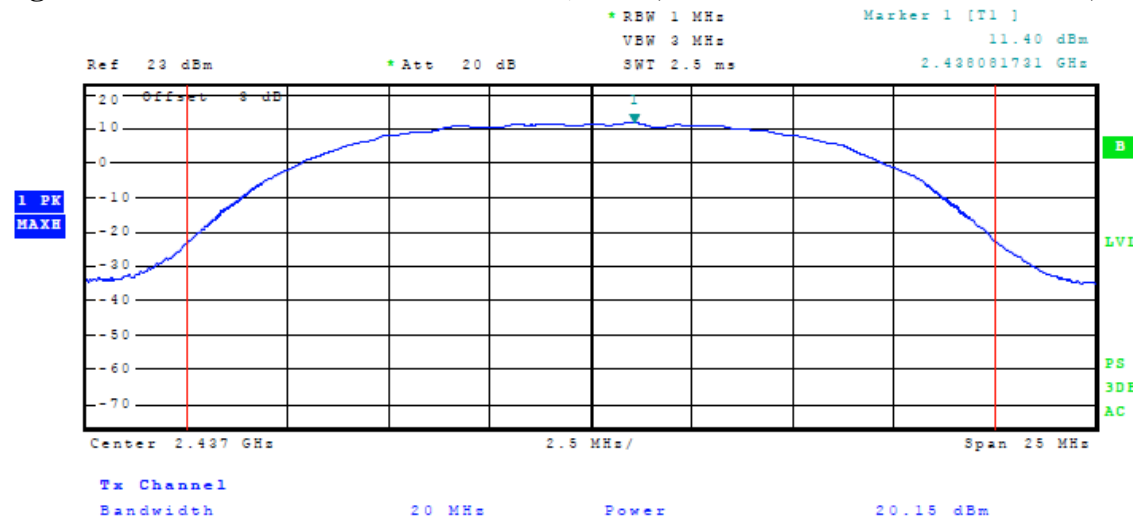


Figure 7 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2437 MHz, Chain 1)

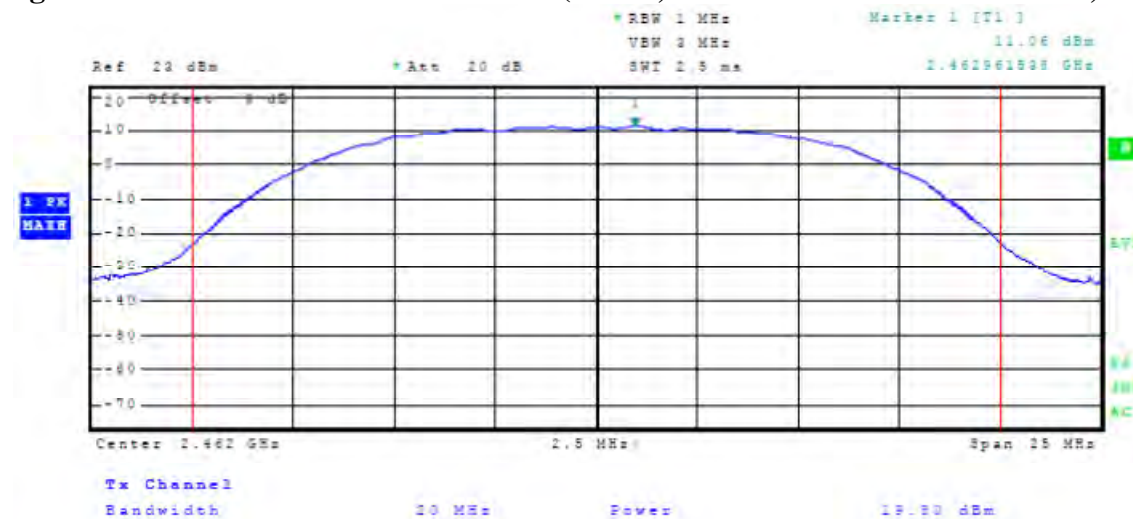


Figure 8 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 2462 MHz, Chain 1)

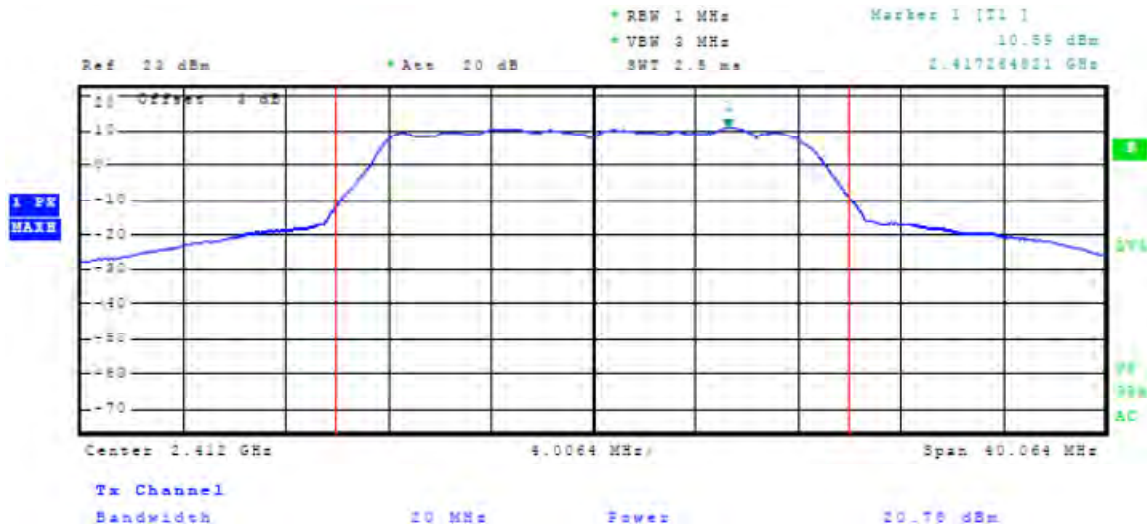


Figure 9 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2412 MHz, Chain 0)

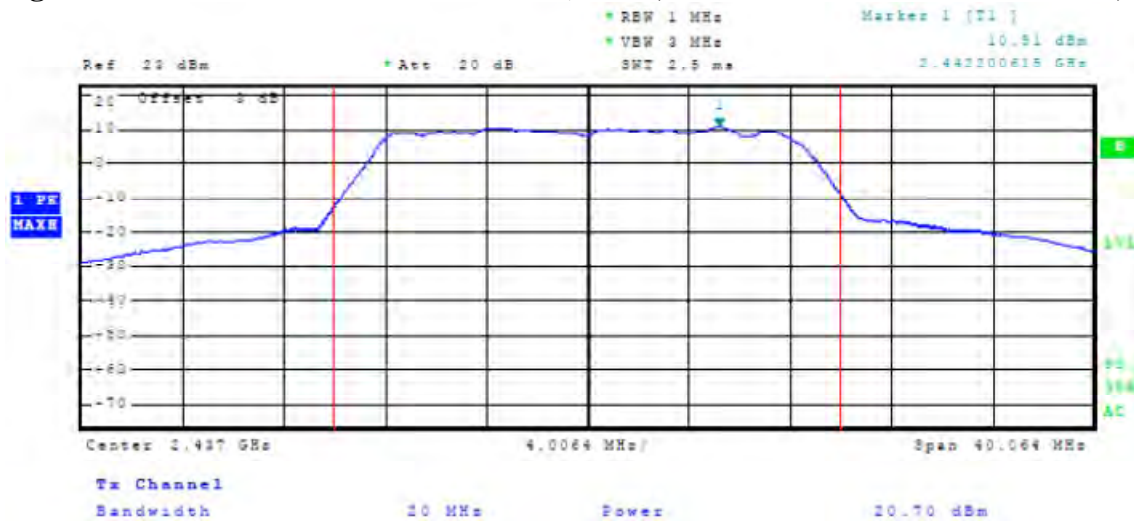


Figure 10 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2437 MHz, Chain 0)

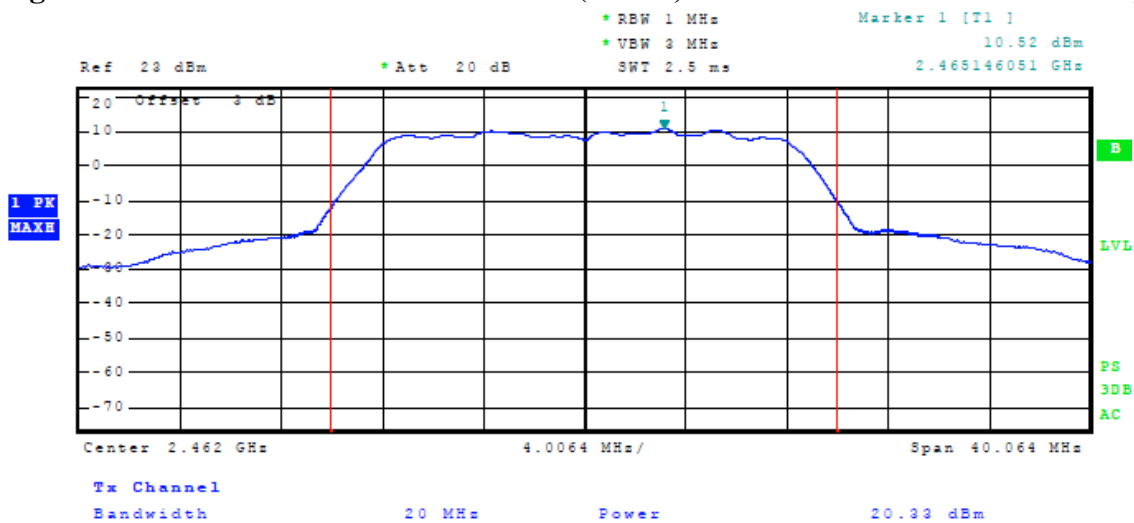


Figure 11 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2462 MHz, Chain 0)

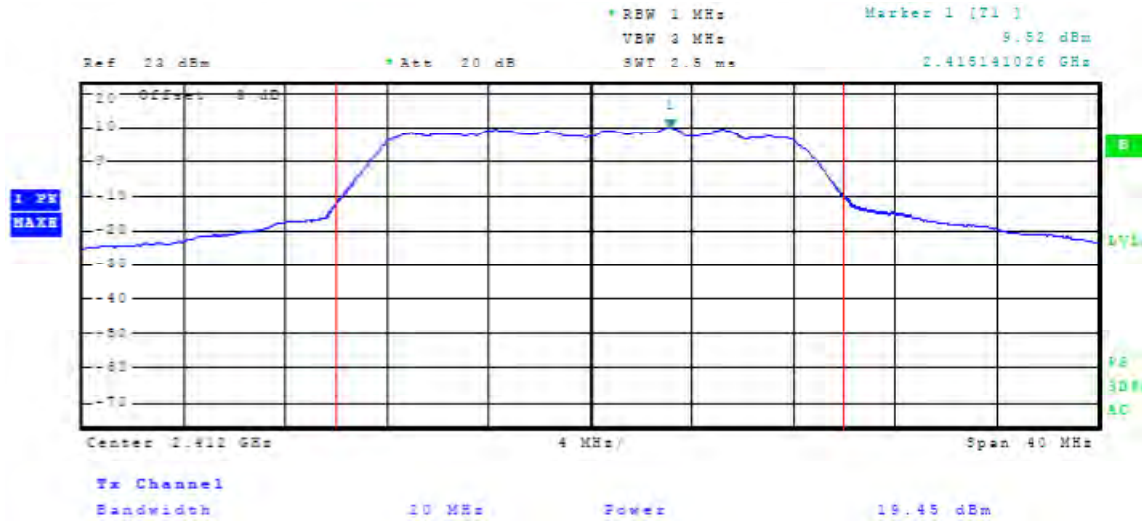


Figure 12 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2412 MHz, Chain 1)

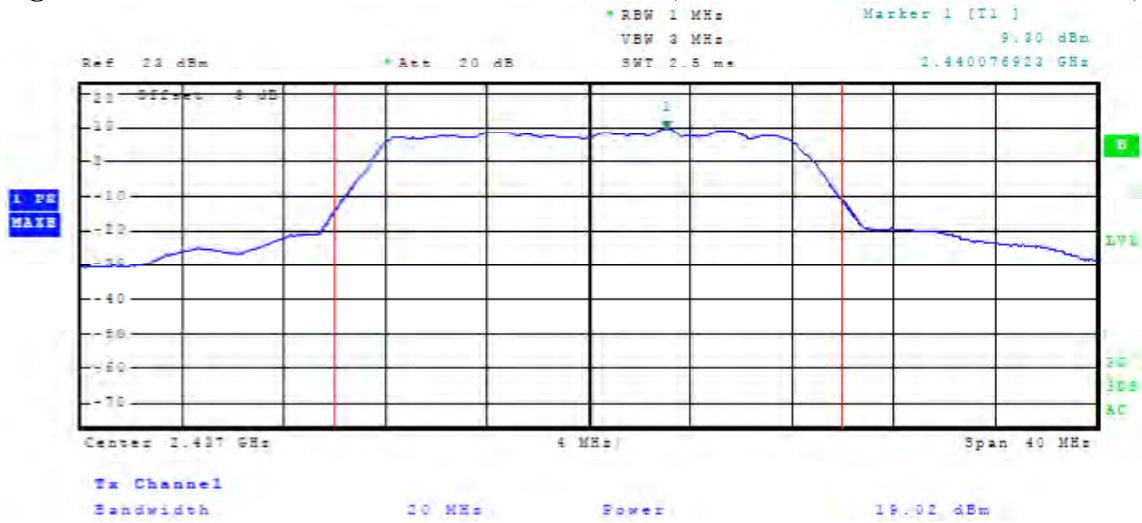


Figure 13 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2437 MHz, Chain 1)

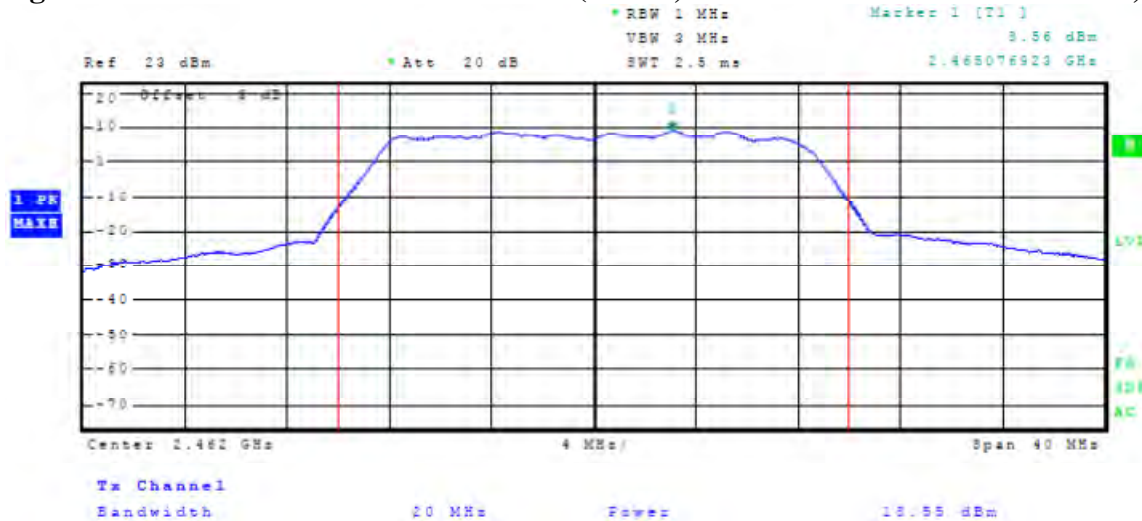


Figure 14 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 2462 MHz, Chain 1)

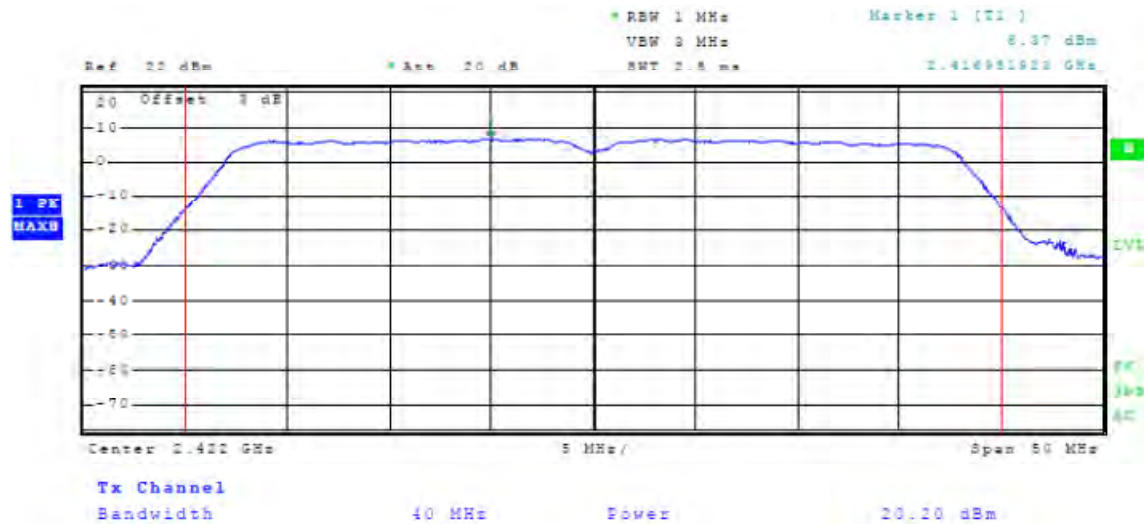


Figure 15 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2422 MHz, Chain 0)

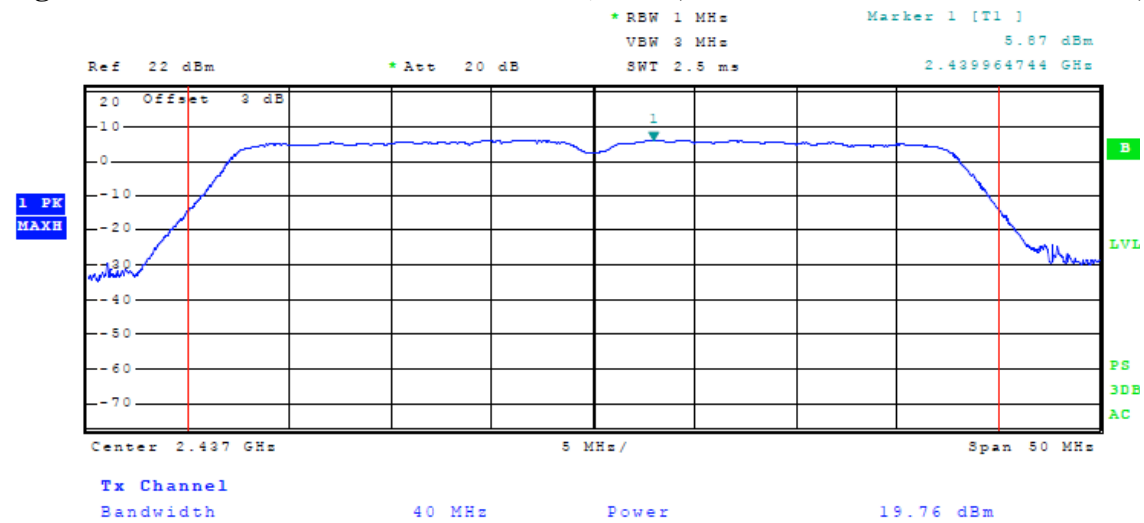


Figure 16 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2437 MHz, Chain 0)

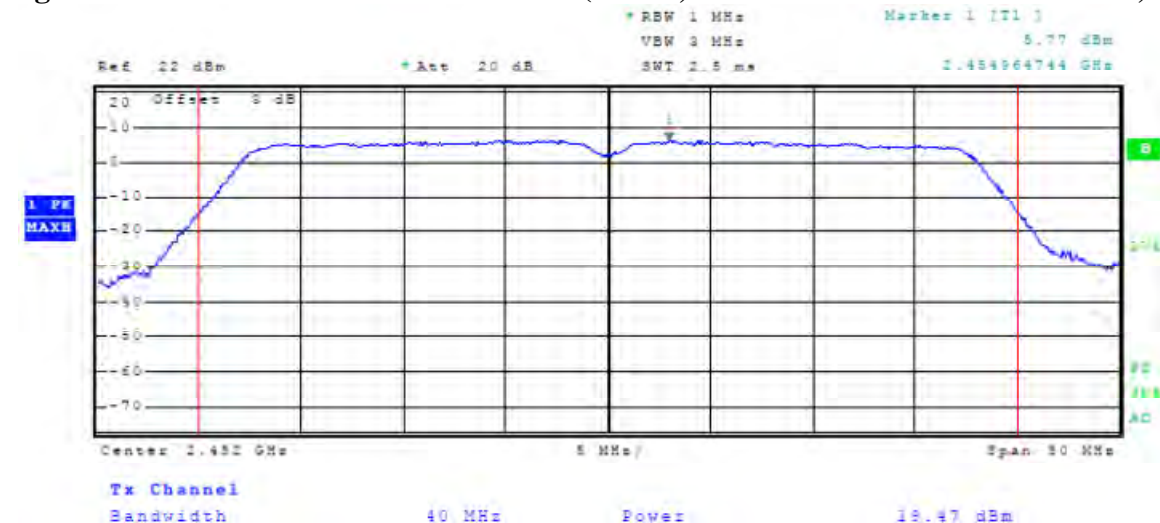


Figure 17 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2452 MHz, Chain 0)

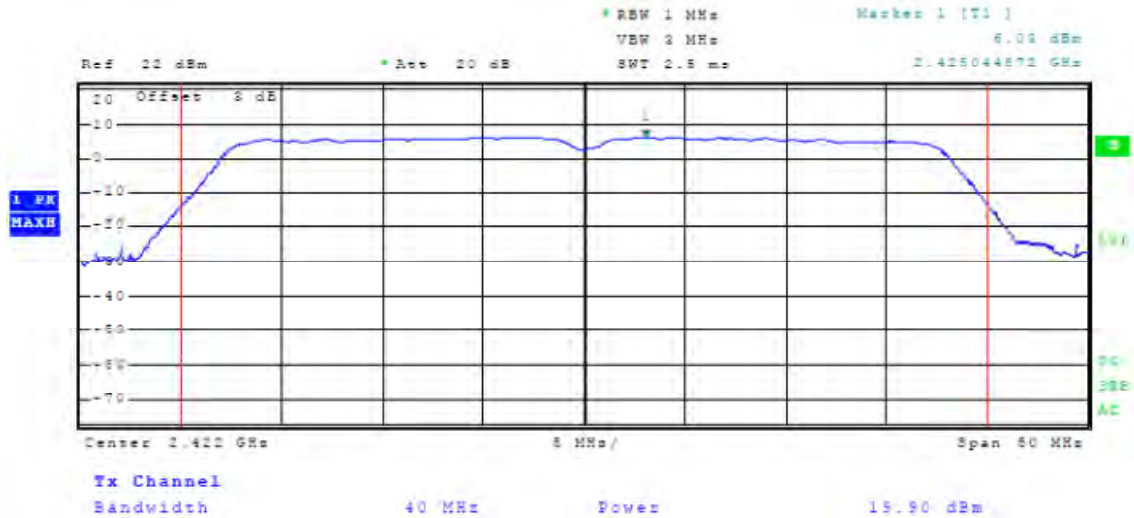


Figure 18 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2422 MHz, Chain 1)

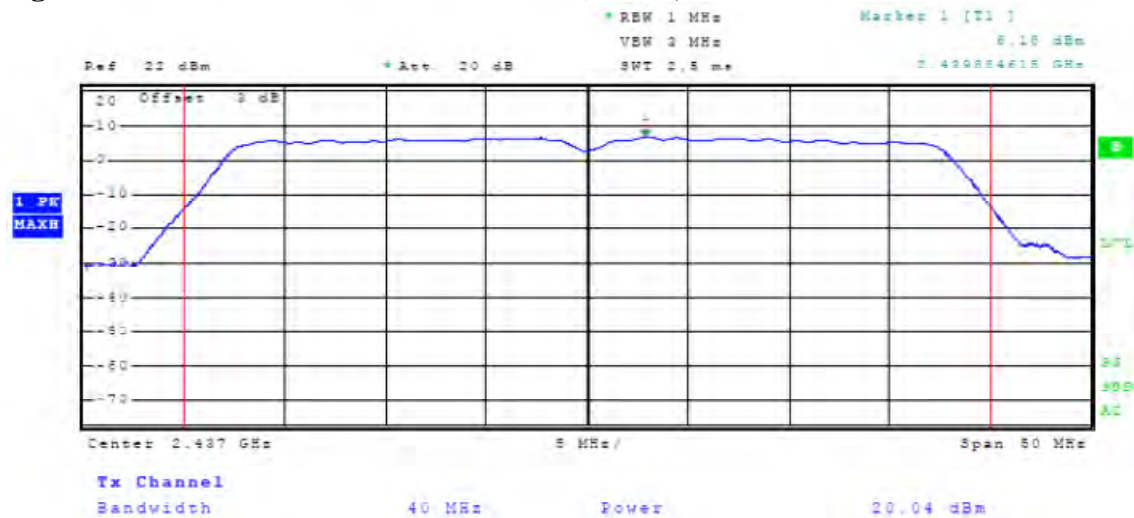


Figure 19 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2437 MHz, Chain 1)

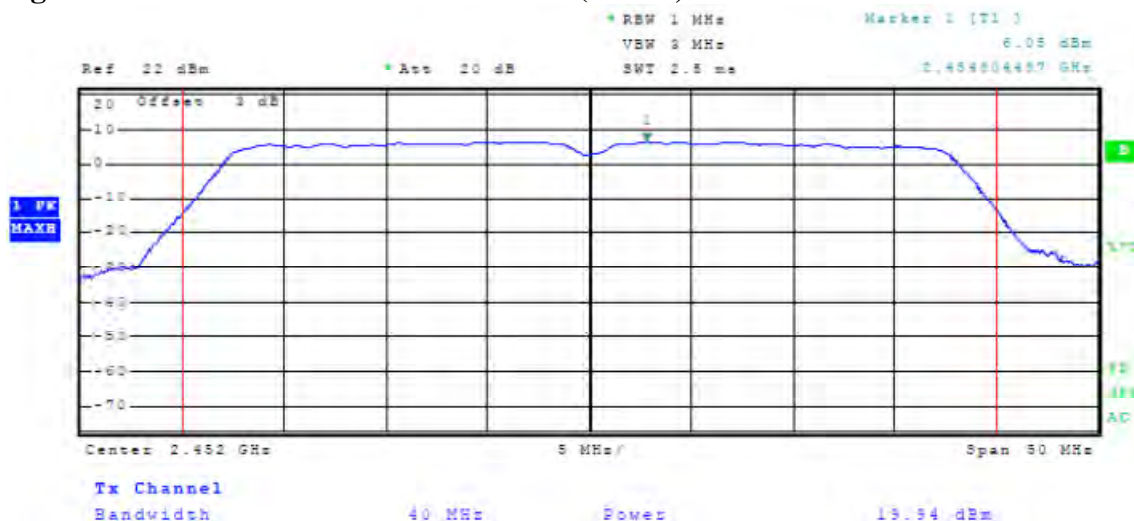


Figure 20 Plot of Antenna Port Emissions (Power, 40MHz OFDM Mode 2452 MHz, Chain 1)

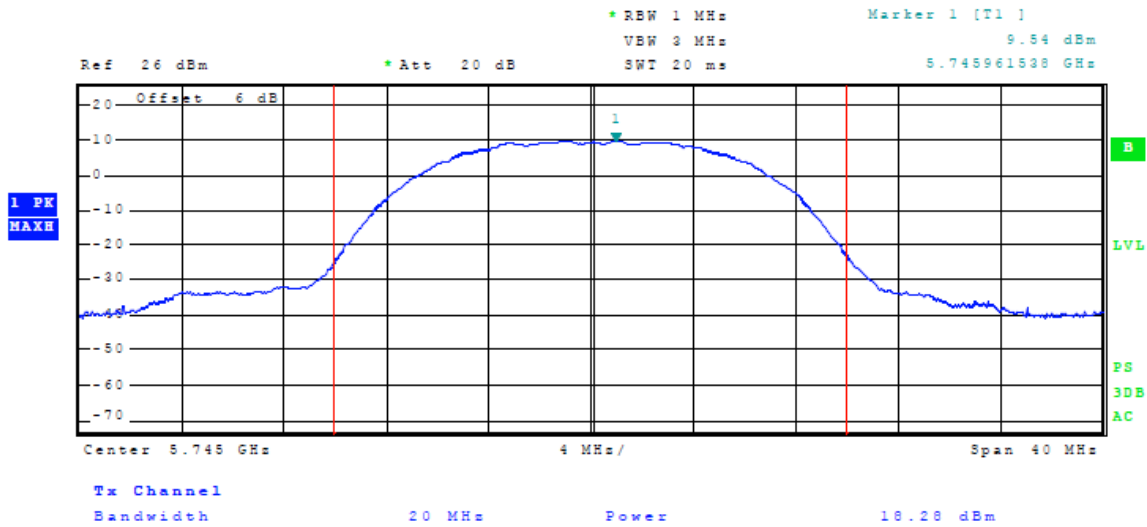


Figure 21 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5745 MHz, Chain 0)

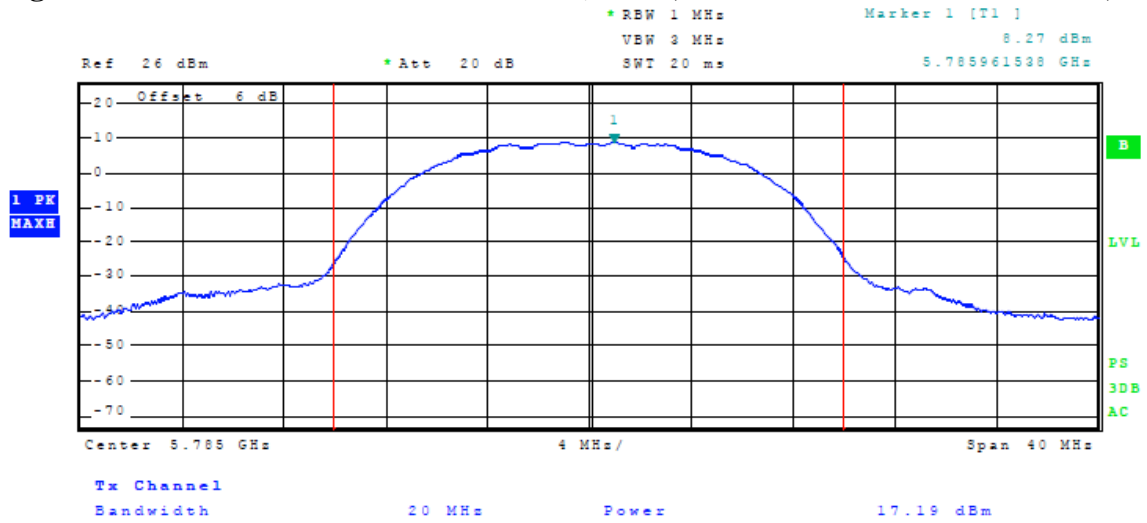


Figure 22 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5785 MHz, Chain 0)

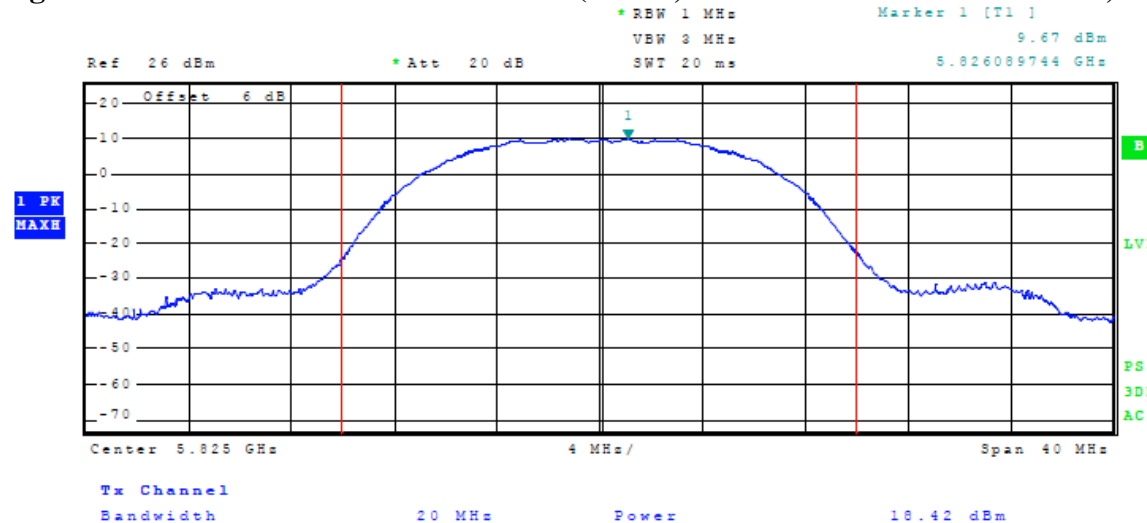


Figure 23 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5825 MHz, Chain 0)

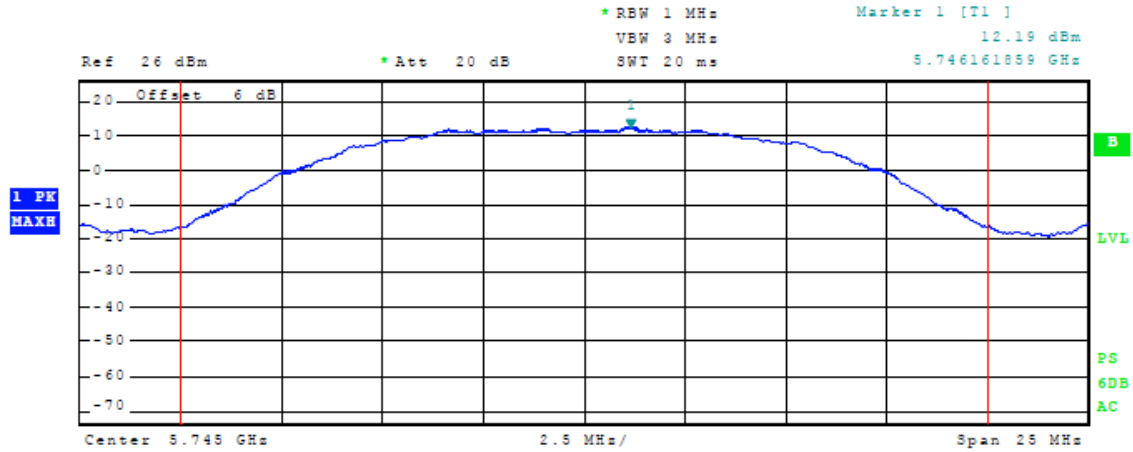


Figure 24 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5745 MHz, Chain 1)

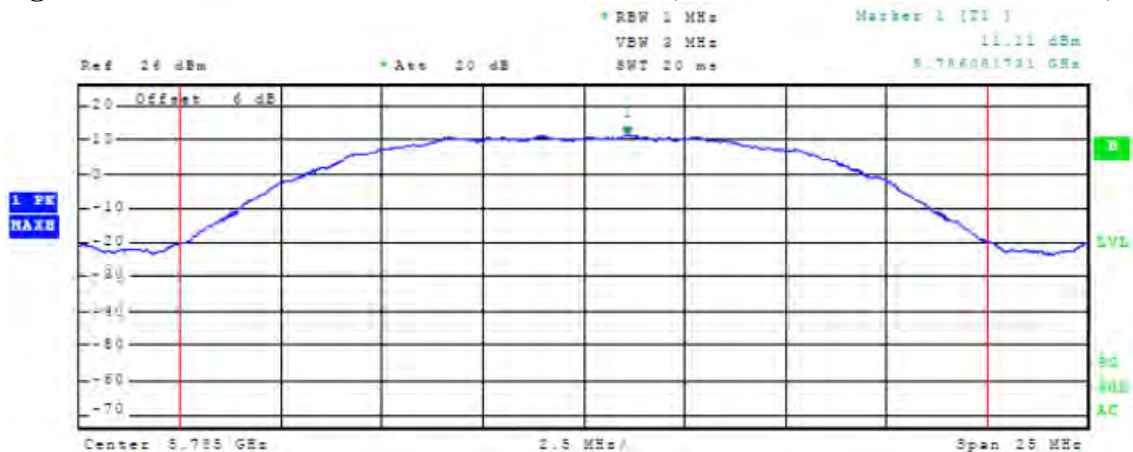


Figure 25 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5785 MHz, Chain 1)

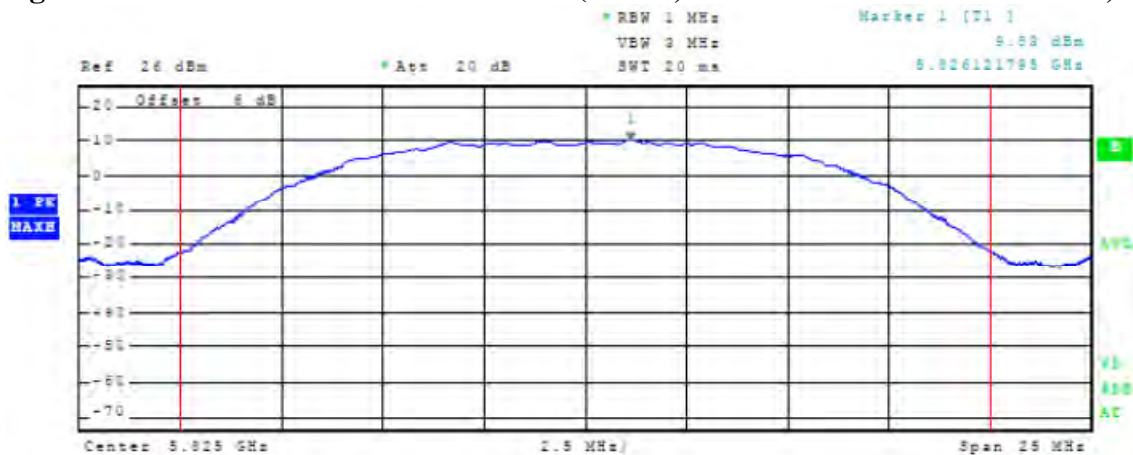


Figure 26 Plot of Antenna Port Emissions (Power, 20MHz CCK Mode 5825 MHz, Chain 1)

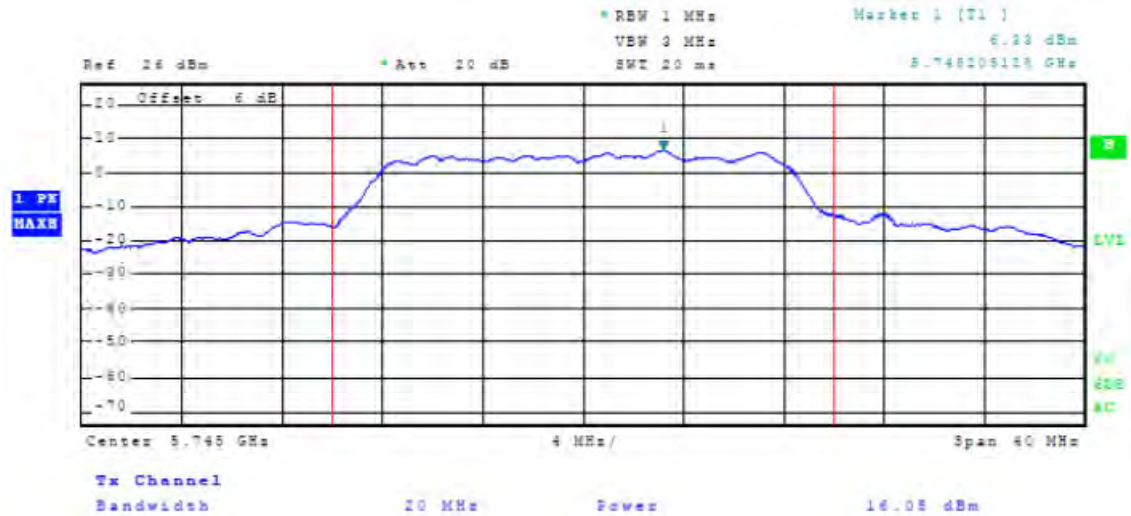


Figure 27 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5745 MHz, Chain 0)

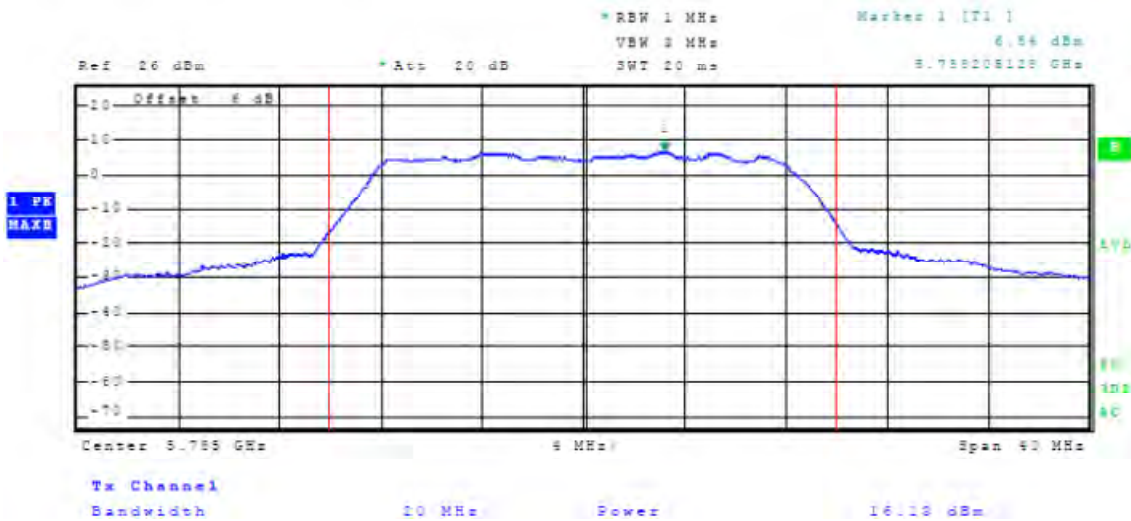


Figure 28 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5785 MHz, Chain 0)

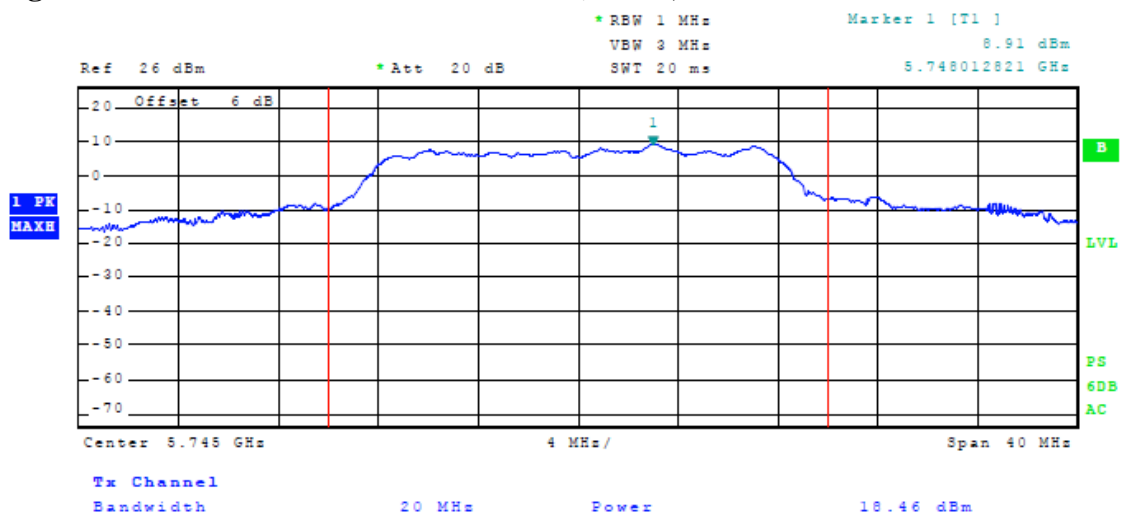


Figure 29 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5825 MHz, Chain 0)

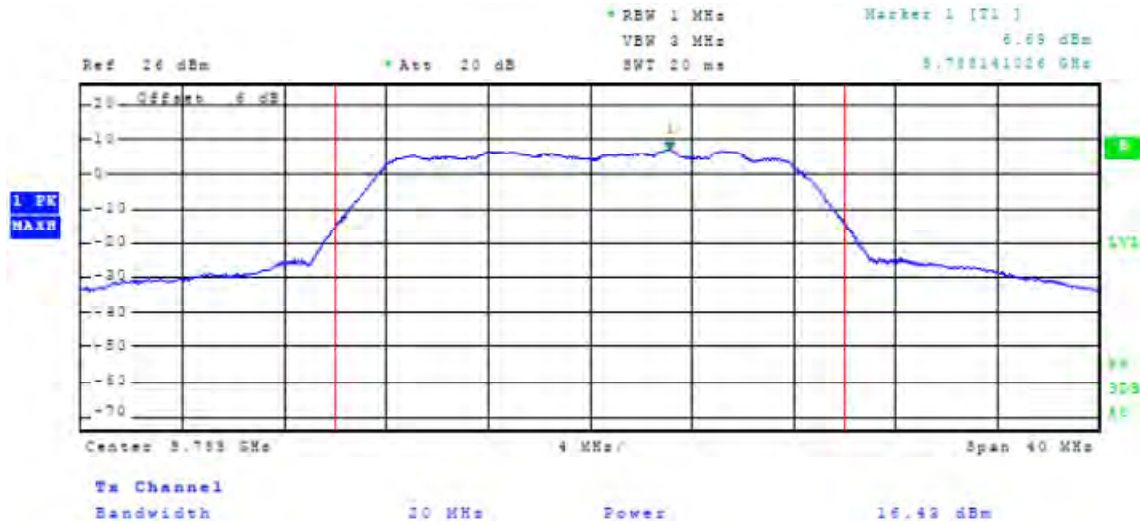


Figure 30 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5745 MHz, Chain 1)

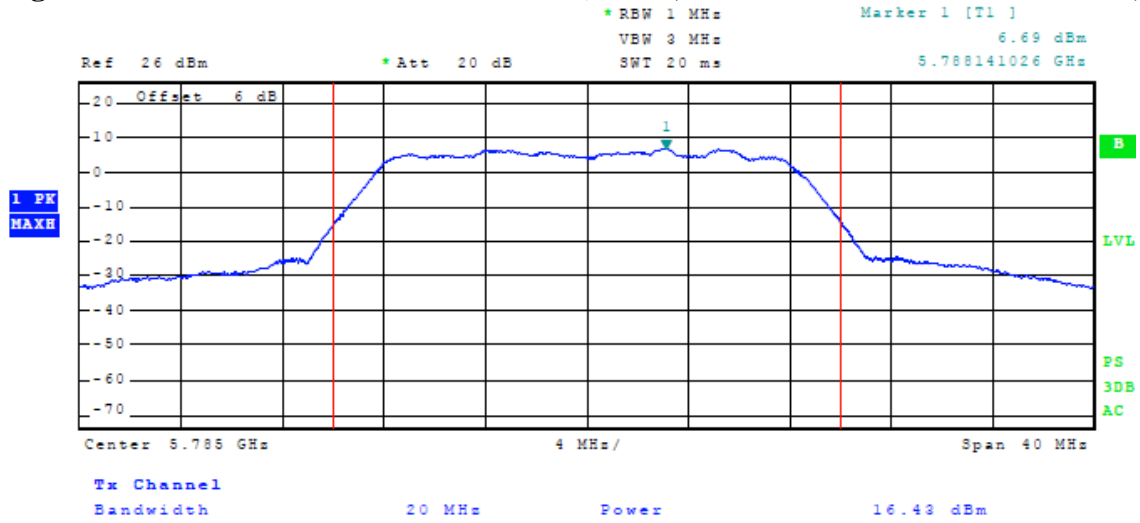


Figure 31 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5785 MHz, Chain 1)

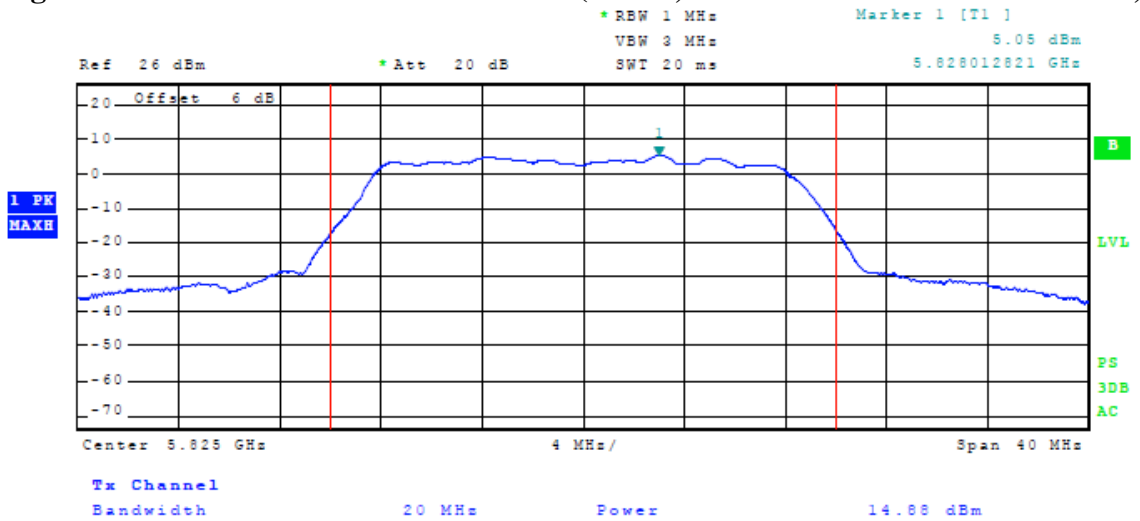


Figure 32 Plot of Antenna Port Emissions (Power, 20MHz OFDM Mode 5825 MHz, Chain 1)

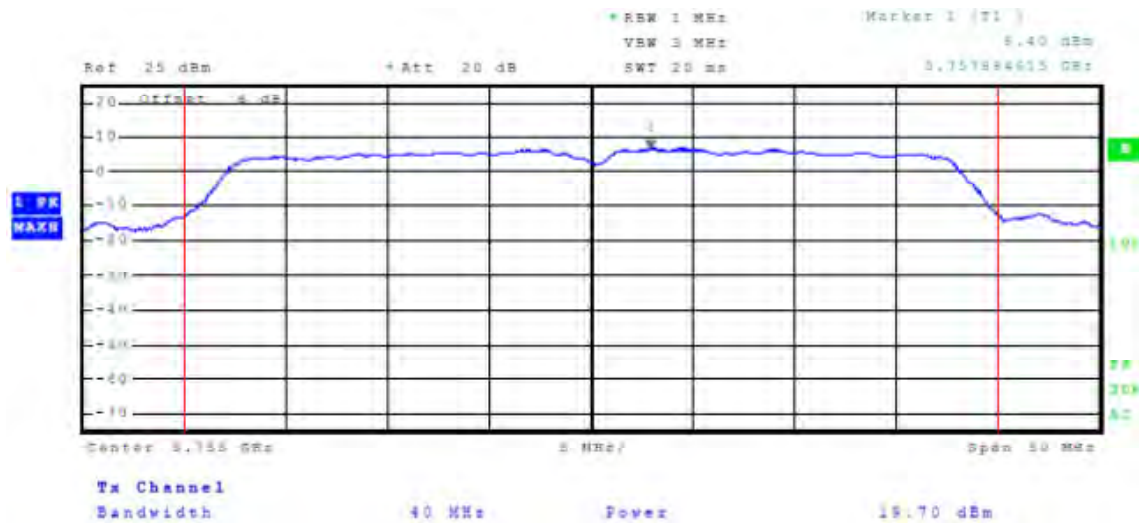


Figure 33 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5755 MHz, Chain 0)

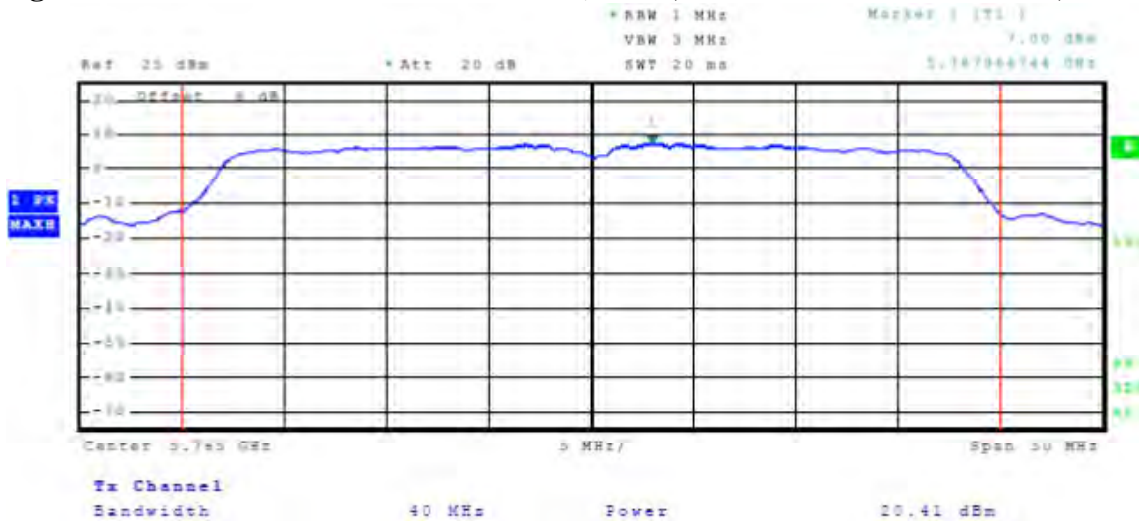


Figure 34 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5785 MHz, Chain 0)

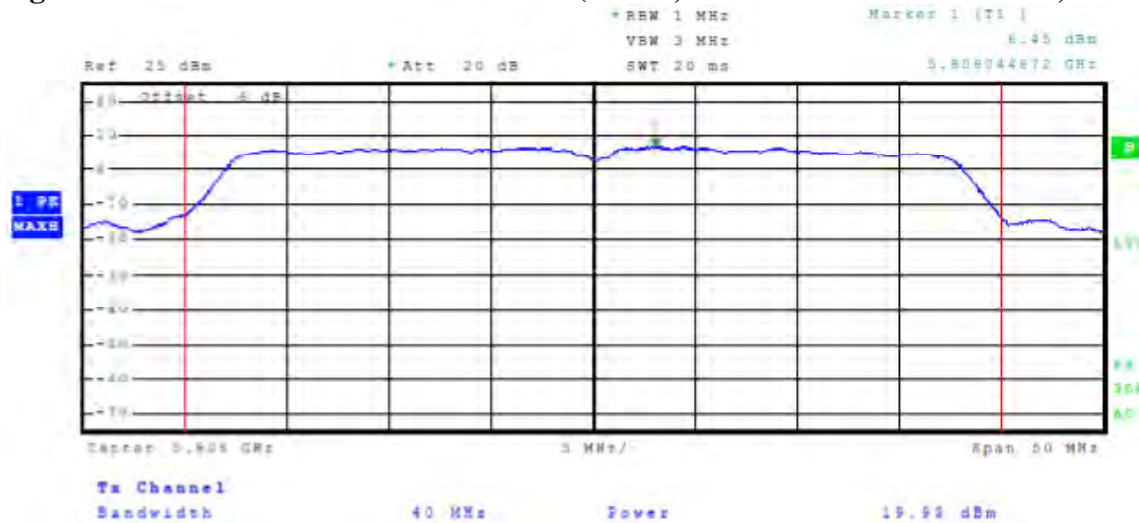


Figure 35 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5805 MHz, Chain 0)

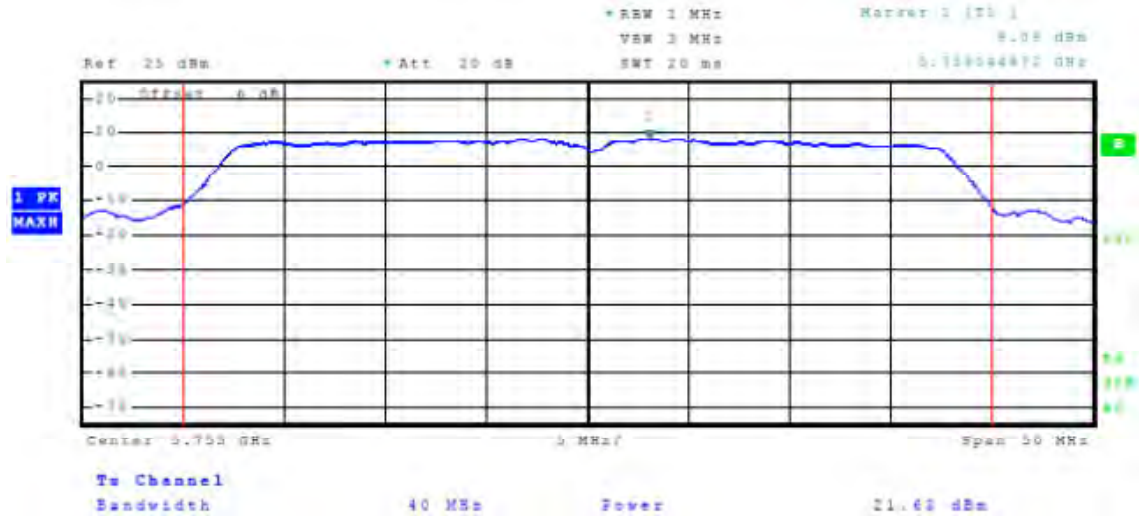


Figure 36 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5755 MHz, Chain 1)

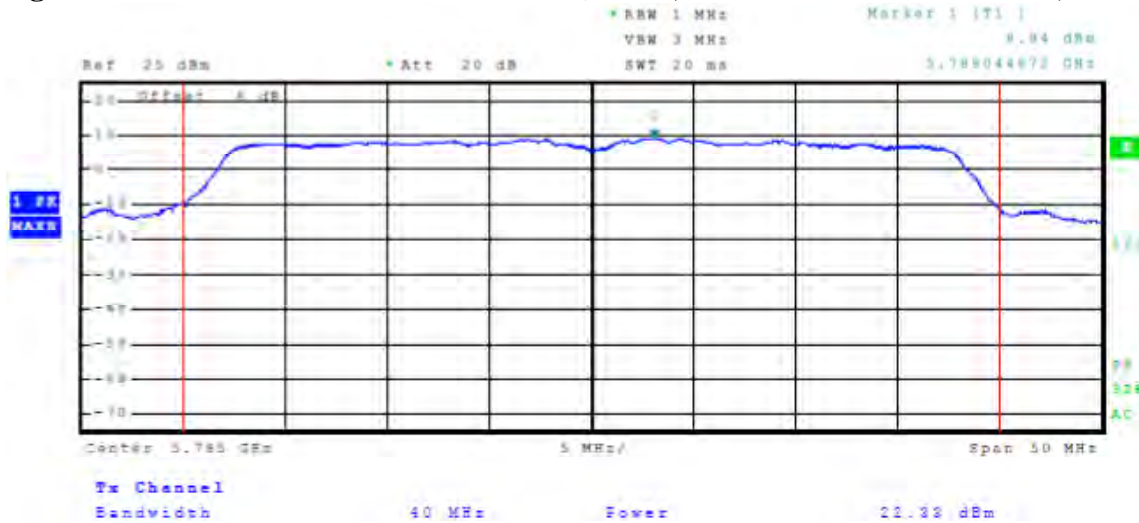


Figure 37 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5785 MHz, Chain 1)


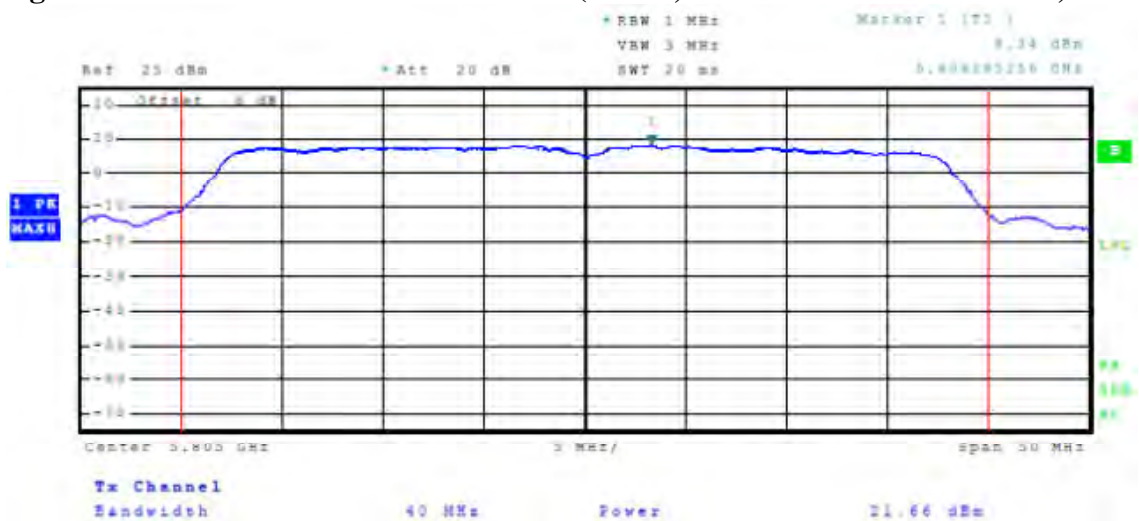


Figure 38 Plot of Antenna Port Emissions (Power, 40MHz N Mode 5805 MHz, Chain 1)

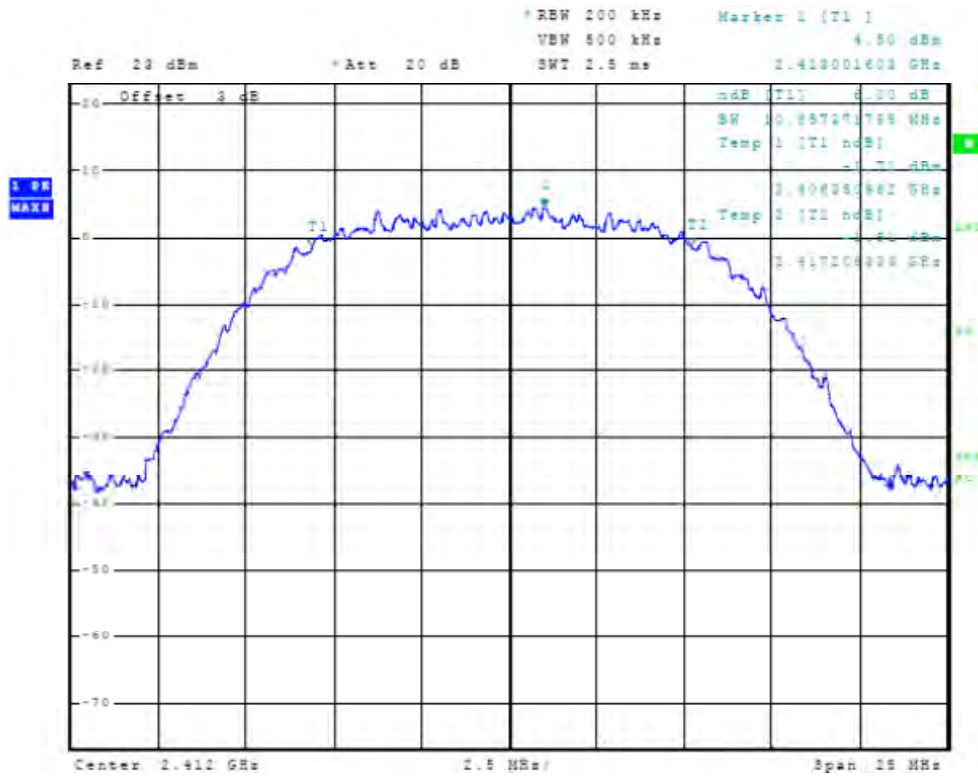

V
Figure 39 Plot of 6dB Band width (20 MHz CCK Mode, 2412 MHz, Chain 0)

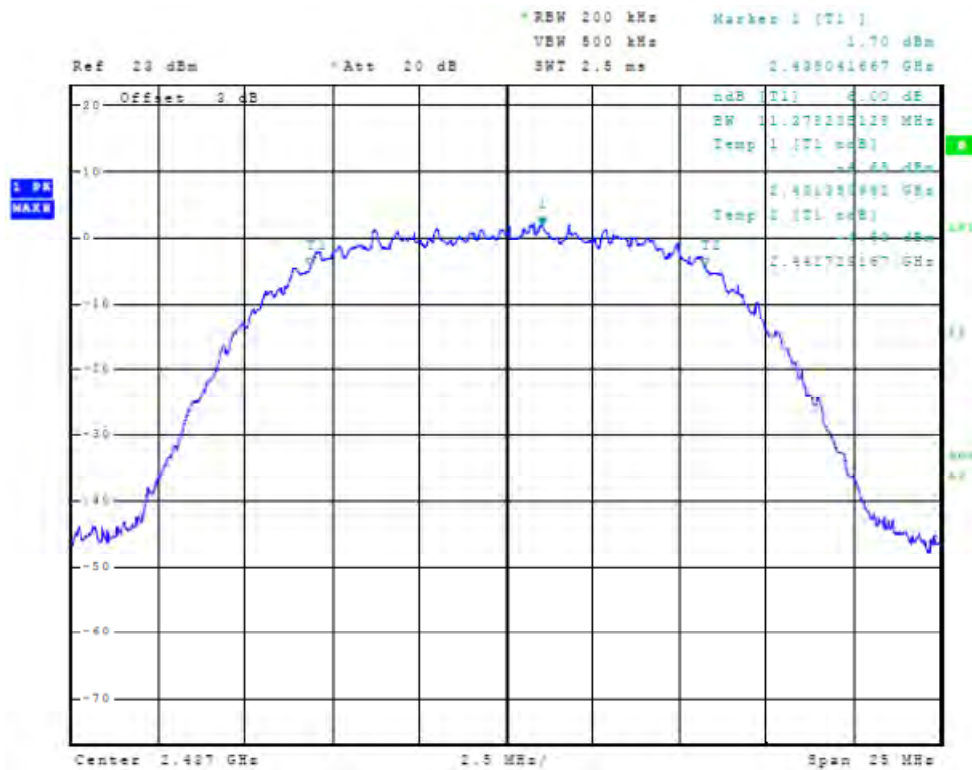


Figure 40 Plot of 6dB Band width (20 MHz CCK Mode, 2437 MHz, Chain 0)

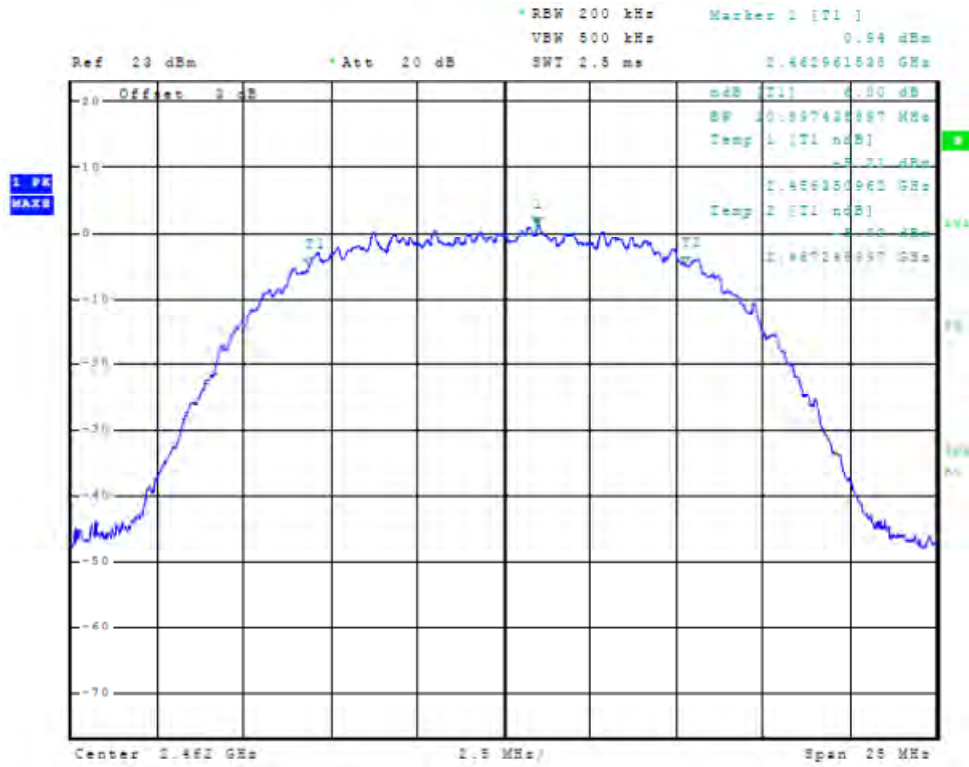


Figure 41 Plot of 6dB Band width (20 MHz CCK Mode, 2462 MHz, Chain 0)

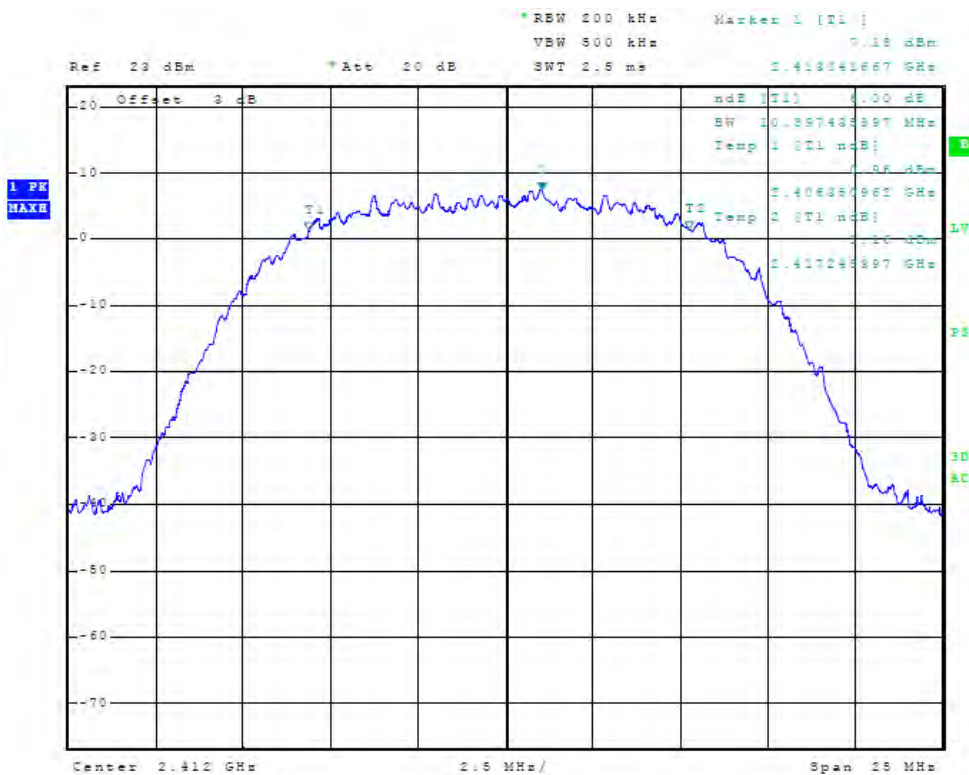


Figure 42 Plot of 6dB Band width (20 MHz CCK Mode, 2412 MHz, Chain 1)

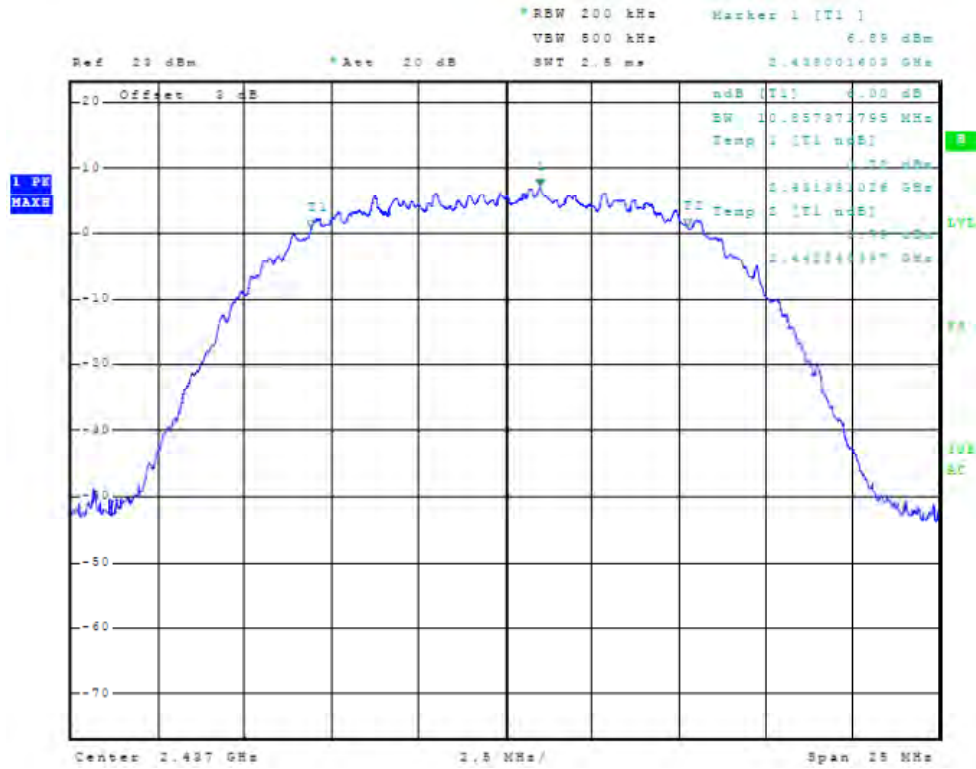


Figure 43 Plot of 6dB Band width (20 MHz CCK Mode, 2437 MHz, Chain 1)

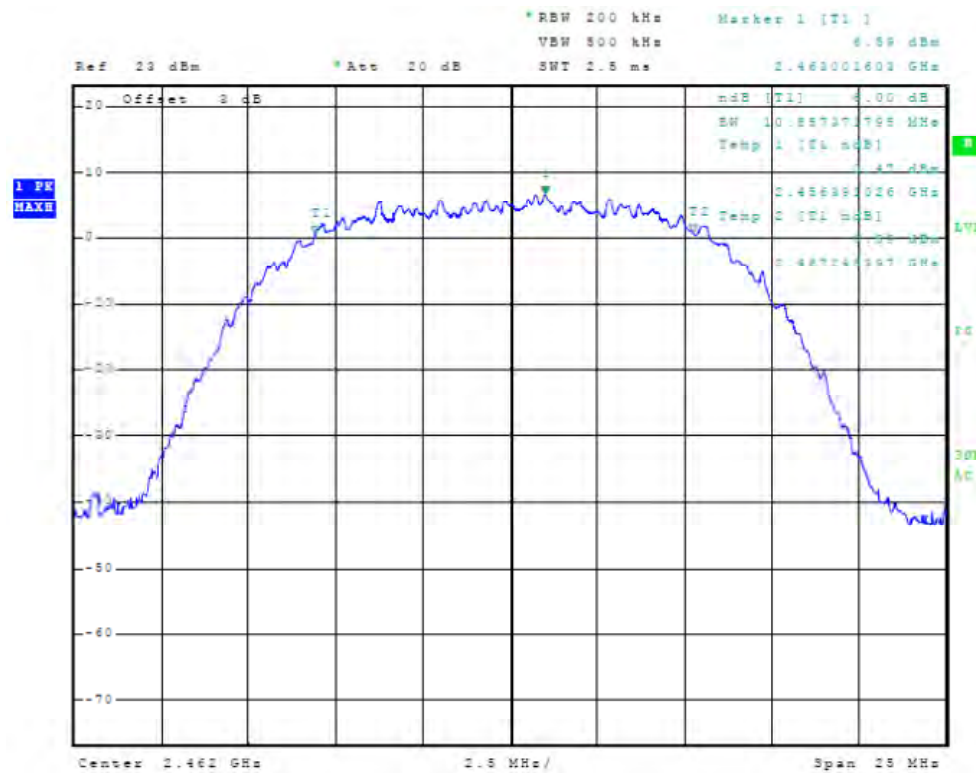


Figure 44 Plot of 6dB Band width (20 MHz CCK Mode, 2462 MHz, Chain 1)

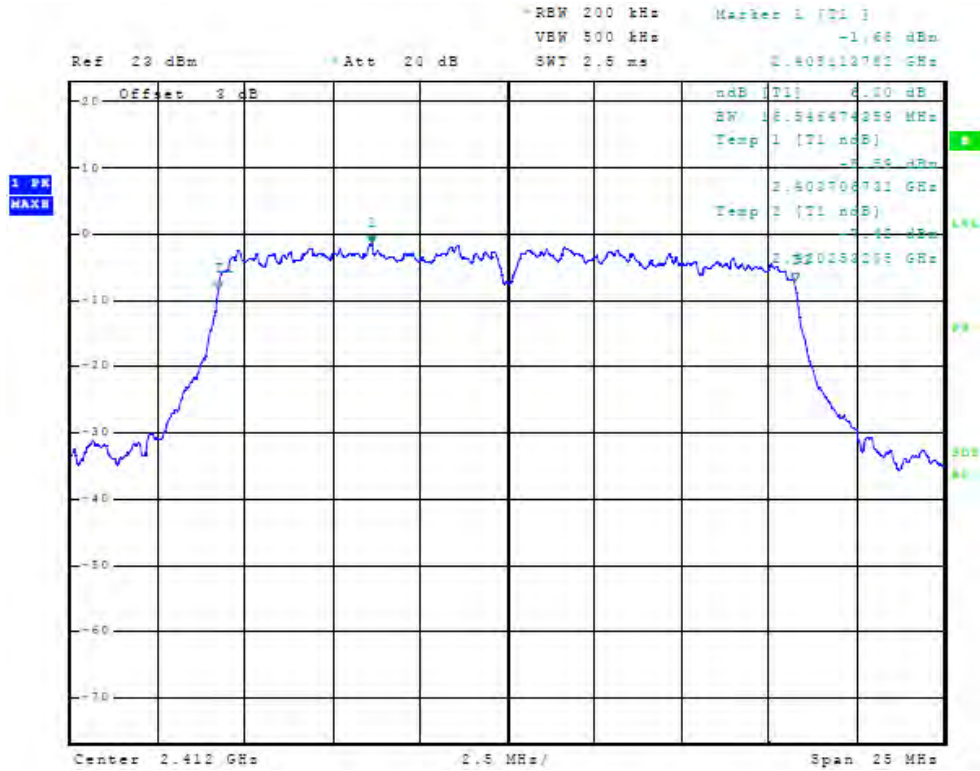


Figure 45 Plot of 6dB Band width (20 MHz OFDM Mode, 2412 MHz, Chain 0)

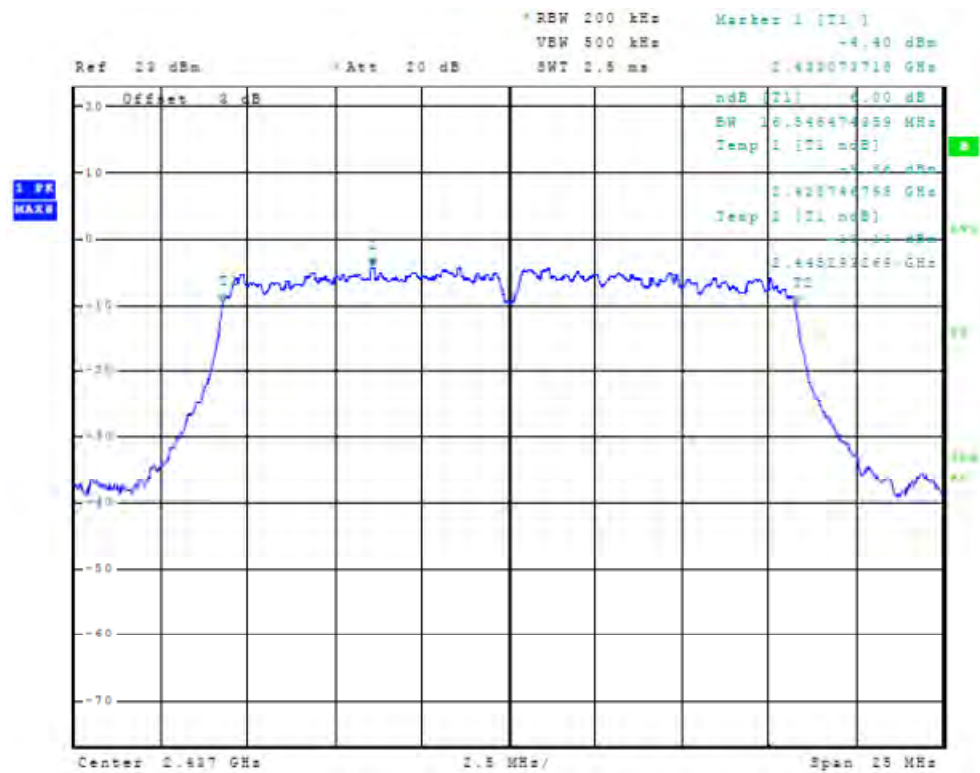


Figure 46 Plot of 6dB Band width (20 MHz OFDM Mode, 2437 MHz, Chain 0)

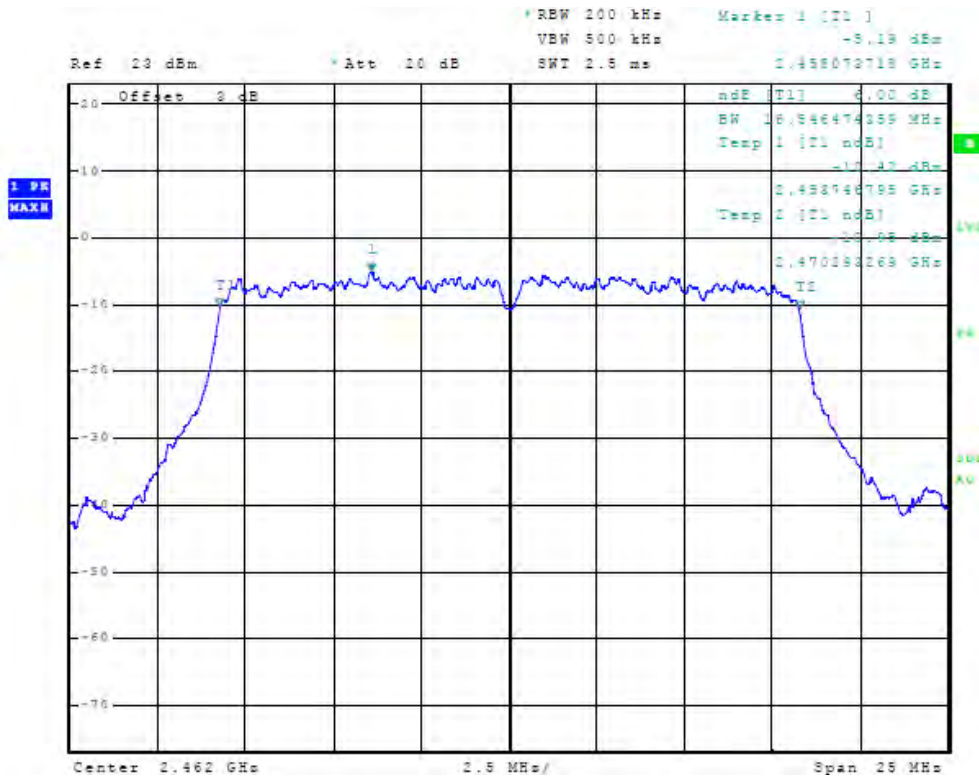


Figure 47 Plot of 6dB Band width (20 MHz OFDM Mode, 2462 MHz, Chain 0)

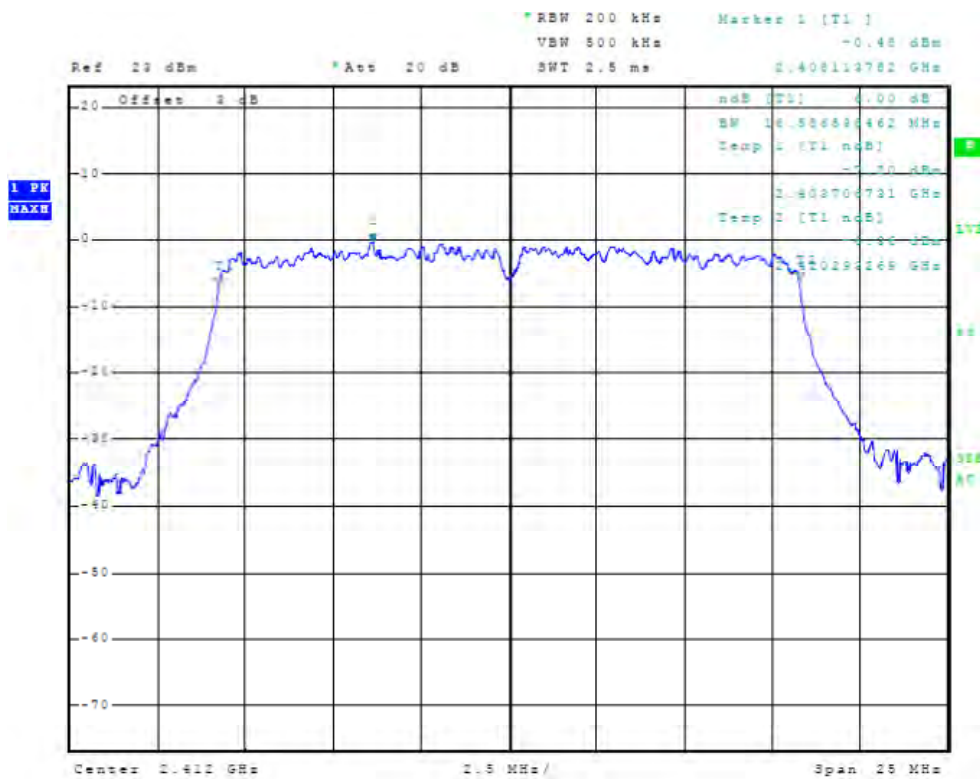


Figure 48 Plot of 6dB Band width (20 MHz OFDM Mode, 2412 MHz, Chain 1)

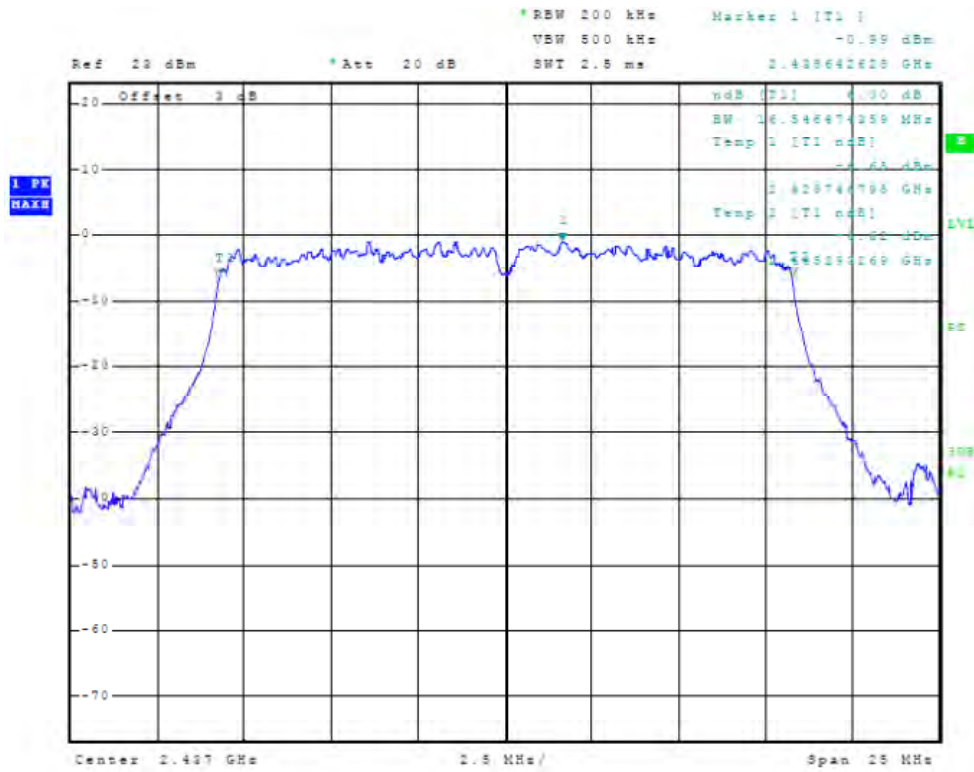


Figure 49 Plot of 6dB Band width (20 MHz OFDM Mode, 2437 MHz, Chain 1)

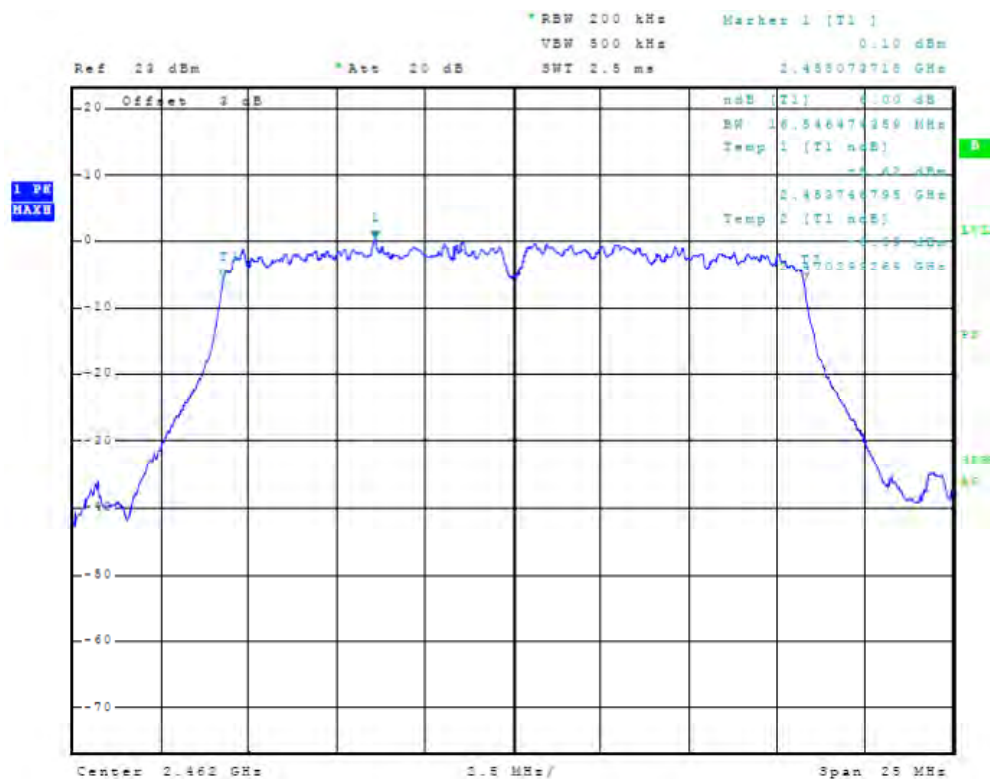


Figure 50 Plot of 6dB Band width (20 MHz OFDM Mode, 2462 MHz, Chain 1)

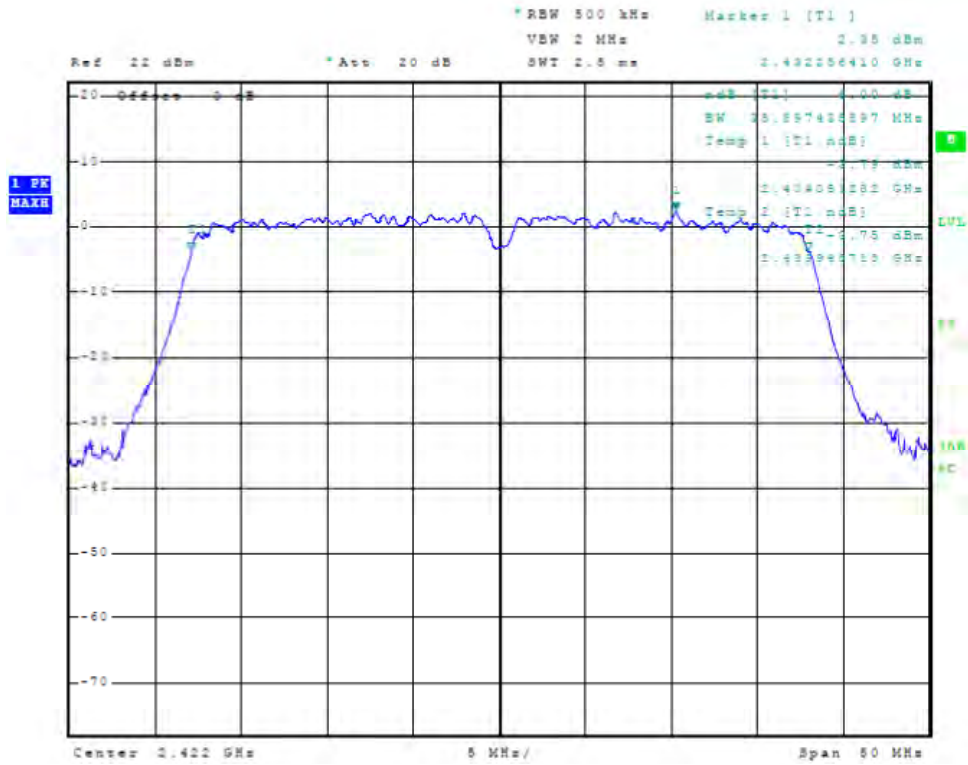


Figure 51 Plot of 6dB Band width (40 MHz N Mode, 2422 MHz, Chain 0)

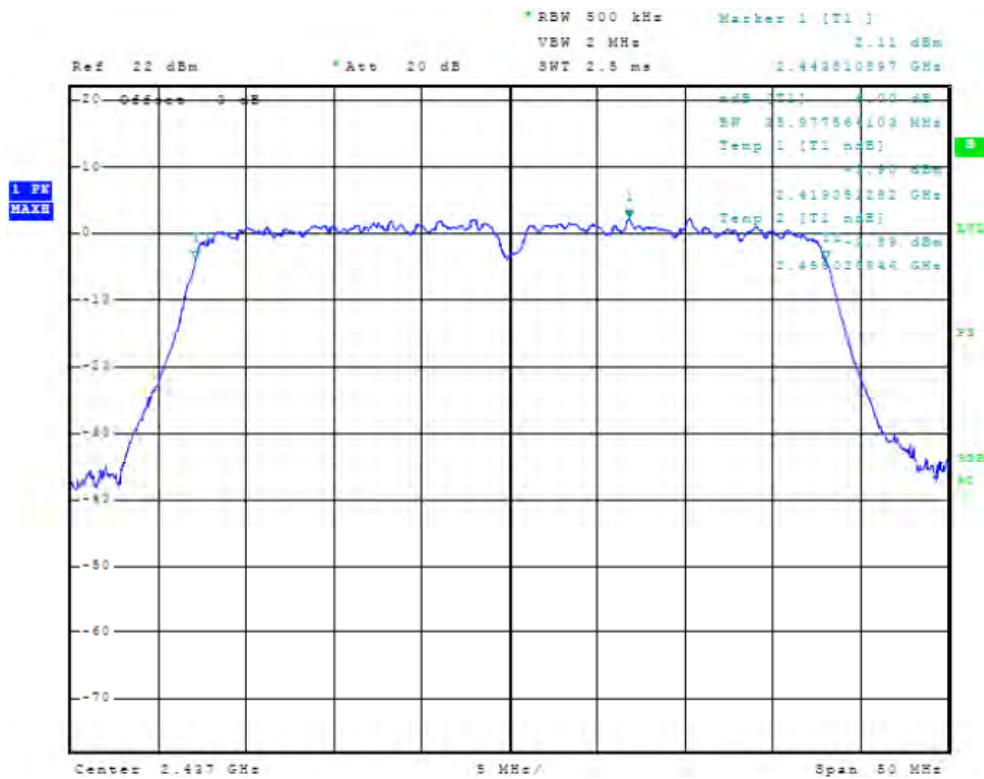


Figure 52 Plot of 6dB Band width (40 MHz N Mode, 2437 MHz, Chain 0)

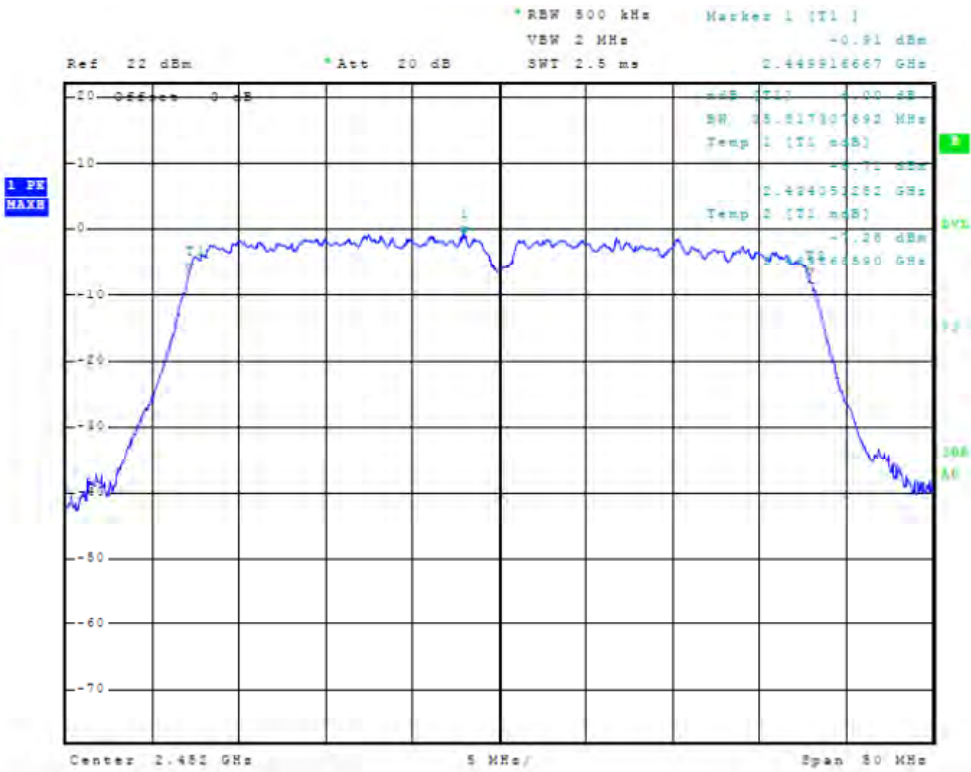


Figure 53 Plot of 6dB Band width (40 MHz N Mode, 2452 MHz, Chain 0)

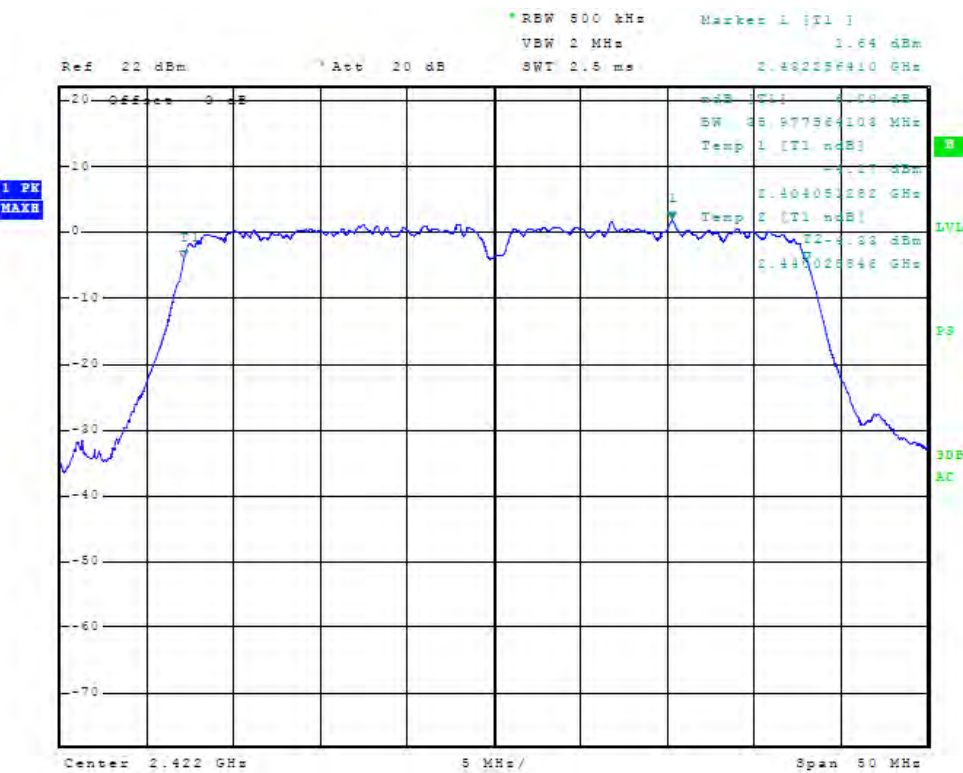


Figure 54 Plot of 6dB Band width (40 MHz N Mode, 2422 MHz, Chain 1)

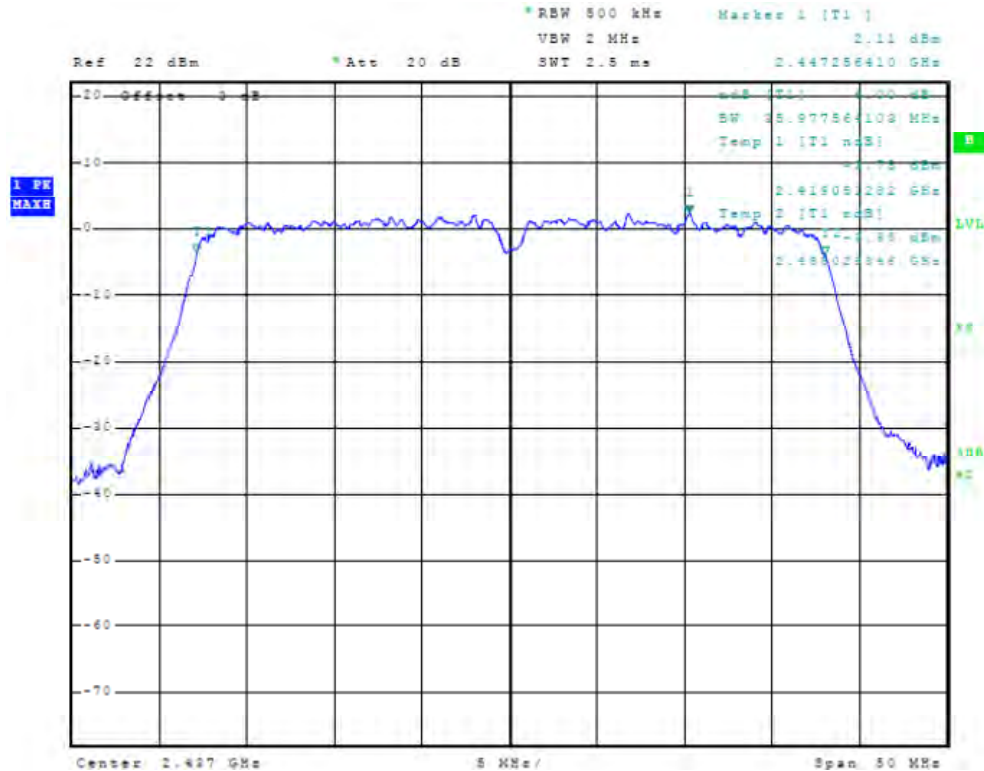


Figure 55 Plot of 6dB Band width (40 MHz N Mode, 2437 MHz, Chain 1)

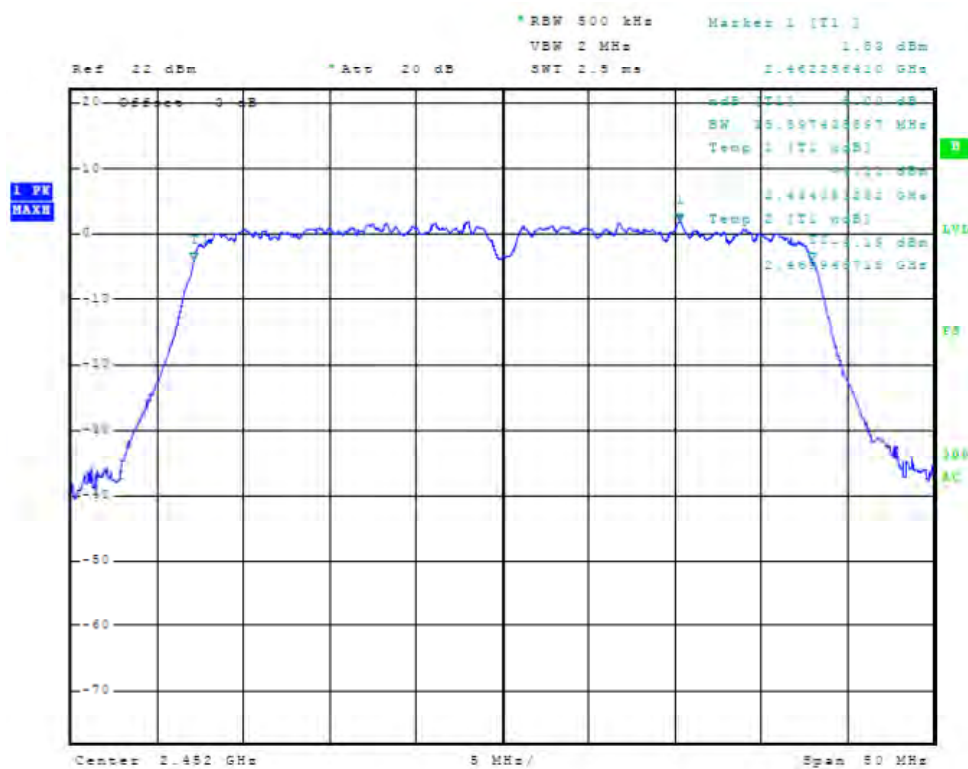


Figure 56 Plot of 6dB Band width (40 MHz N Mode, 2452 MHz, Chain 1)

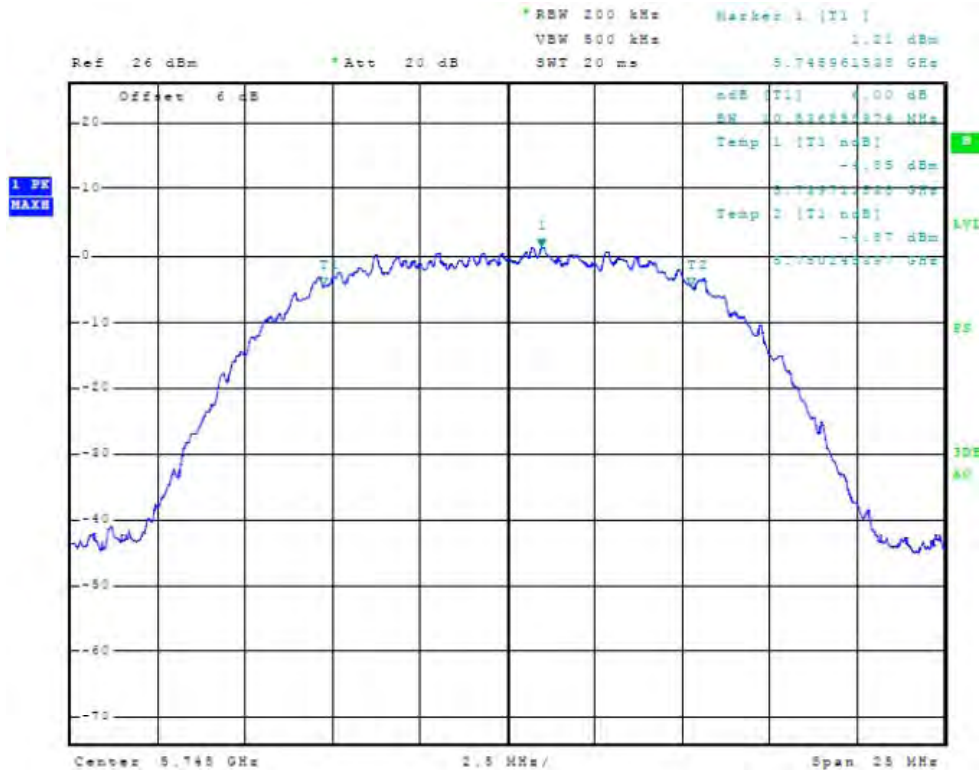


Figure 57 Plot of 6dB Band width (20 MHz CCK Mode, 5745 MHz, Chain 0)

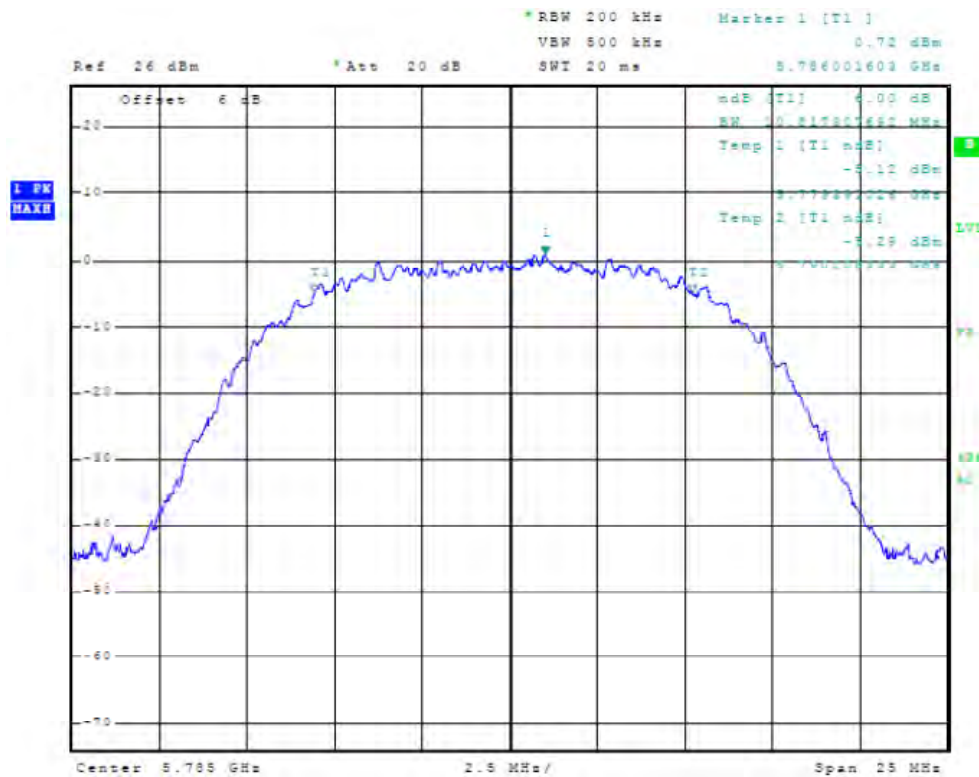


Figure 58 Plot of 6dB Band width (20 MHz CCK Mode, 5785 MHz, Chain 0)



Figure 59 Plot of 6dB Band width (20 MHz CCK Mode, 5825 MHz, Chain 0)

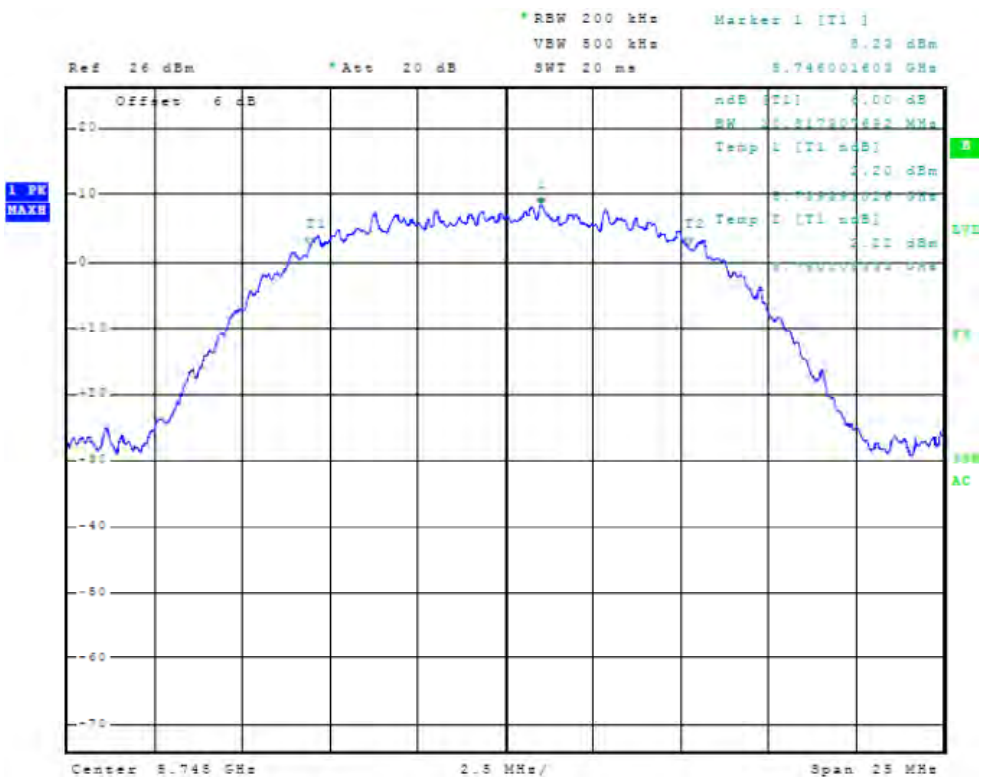


Figure 60 Plot of 6dB Band width (20 MHz CCK Mode, 5745 MHz, Chain 1)

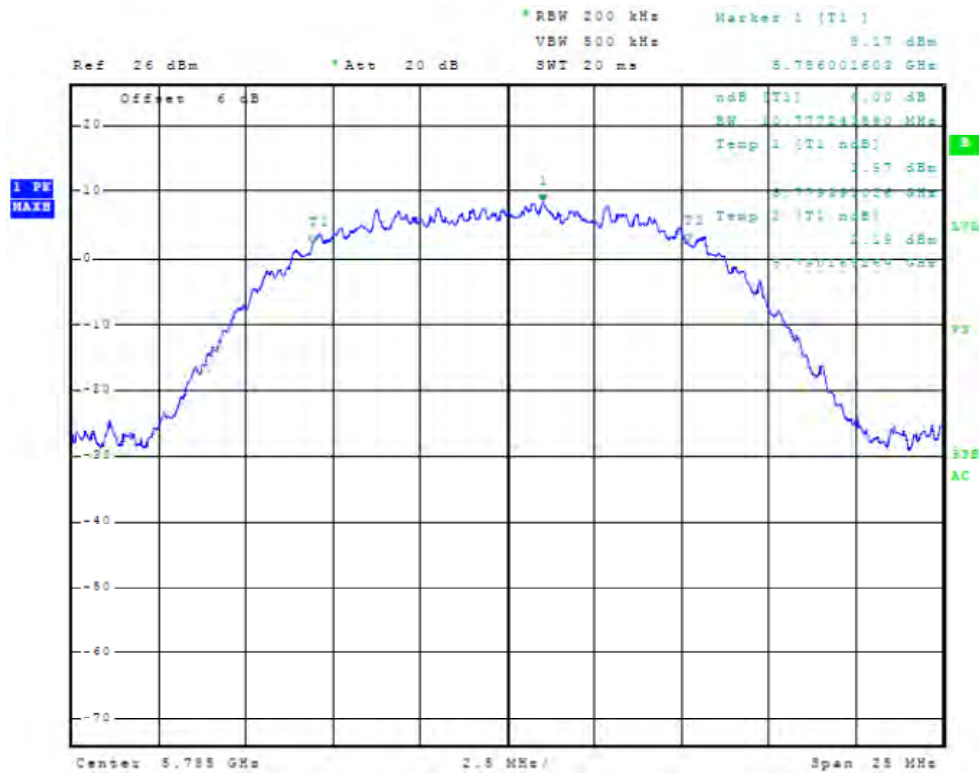


Figure 61 Plot of 6dB Band width (20 MHz CCK Mode, 5785 MHz, Chain 1)

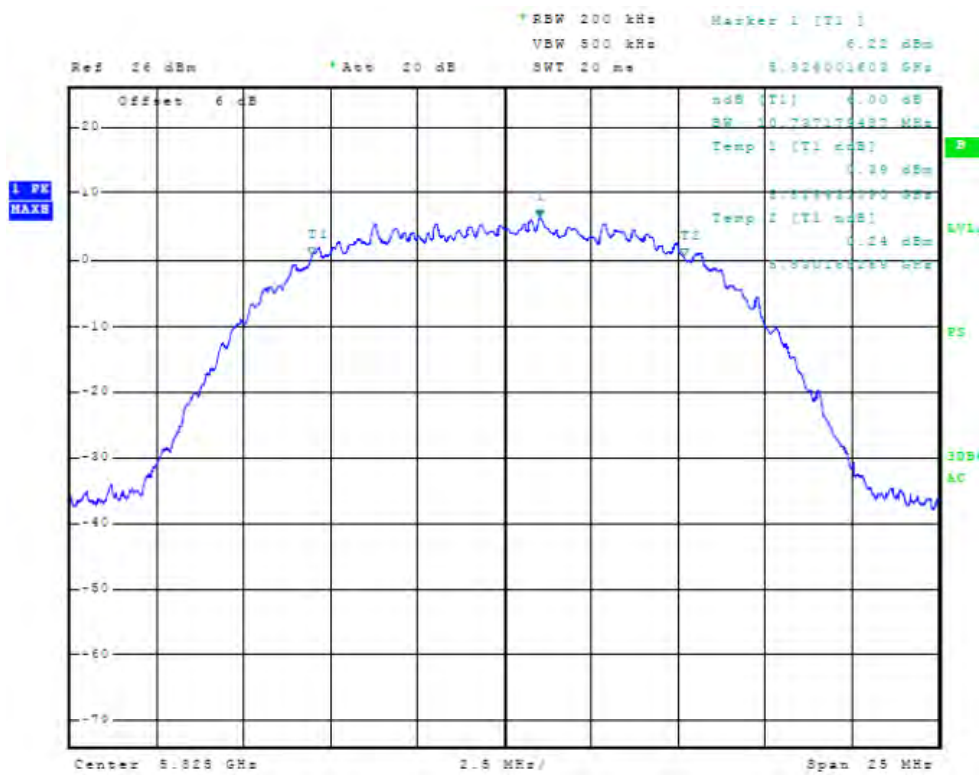


Figure 62 Plot of 6dB Band width (20 MHz CCK Mode, 5825 MHz, Chain 1)

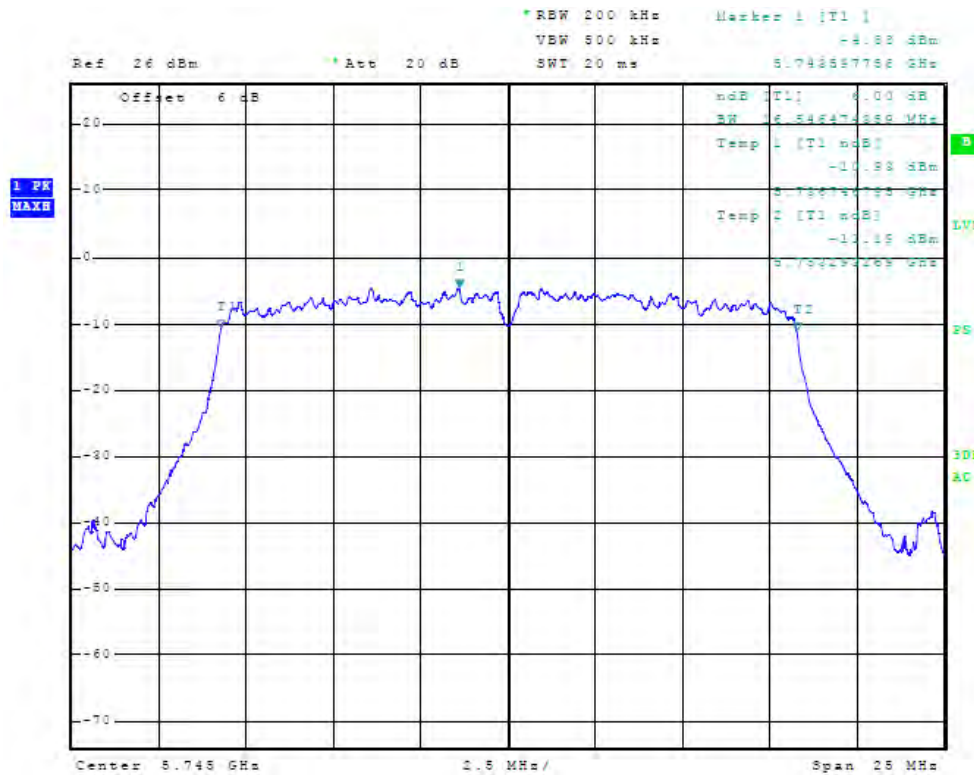


Figure 63 Plot of 6dB Band width (20 MHz OFDM Mode, 5745 MHz, Chain 0)

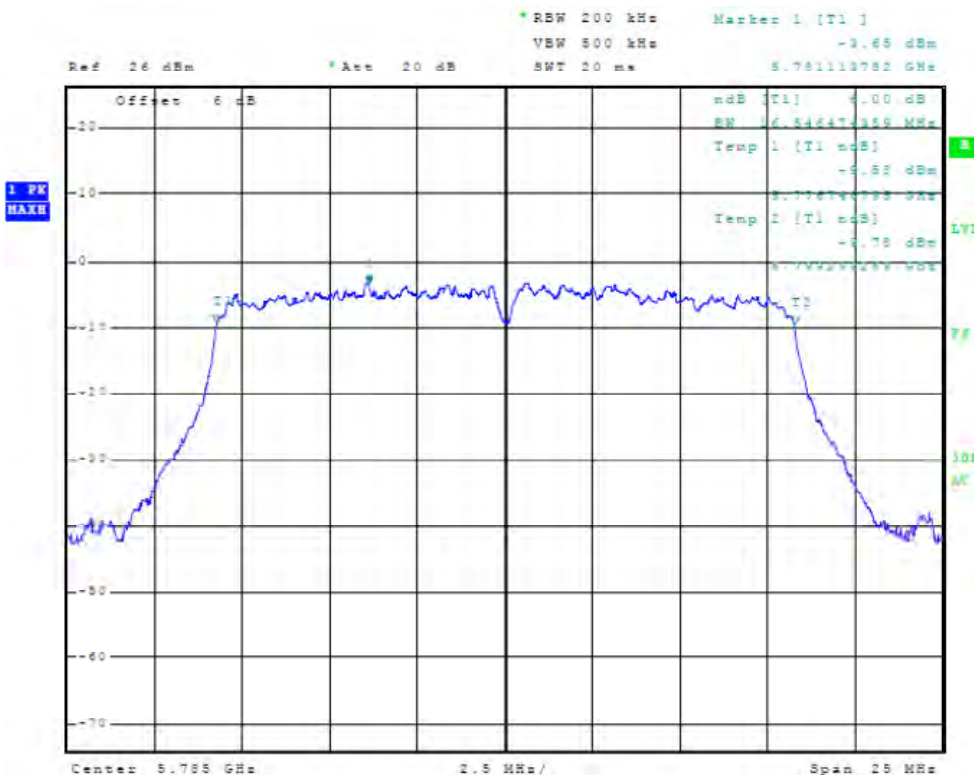


Figure 64 Plot of 6dB Band width (20 MHz OFDM Mode, 5785 MHz, Chain 0)

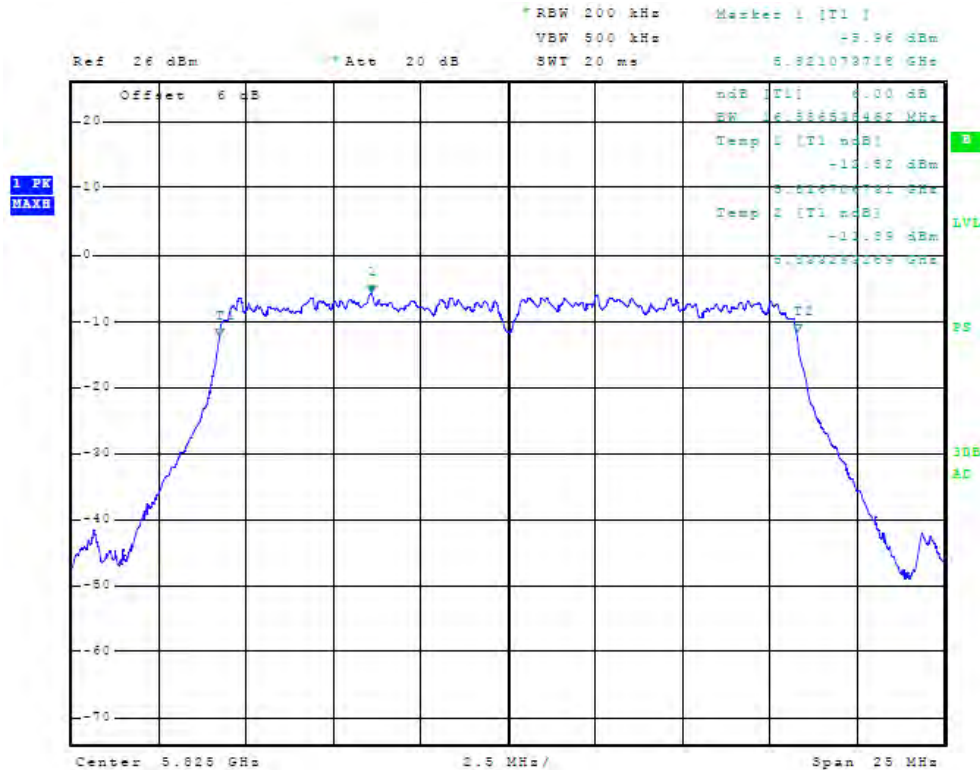


Figure 65 Plot of 6dB Band width (20 MHz OFDM Mode, 5825 MHz, Chain 0)

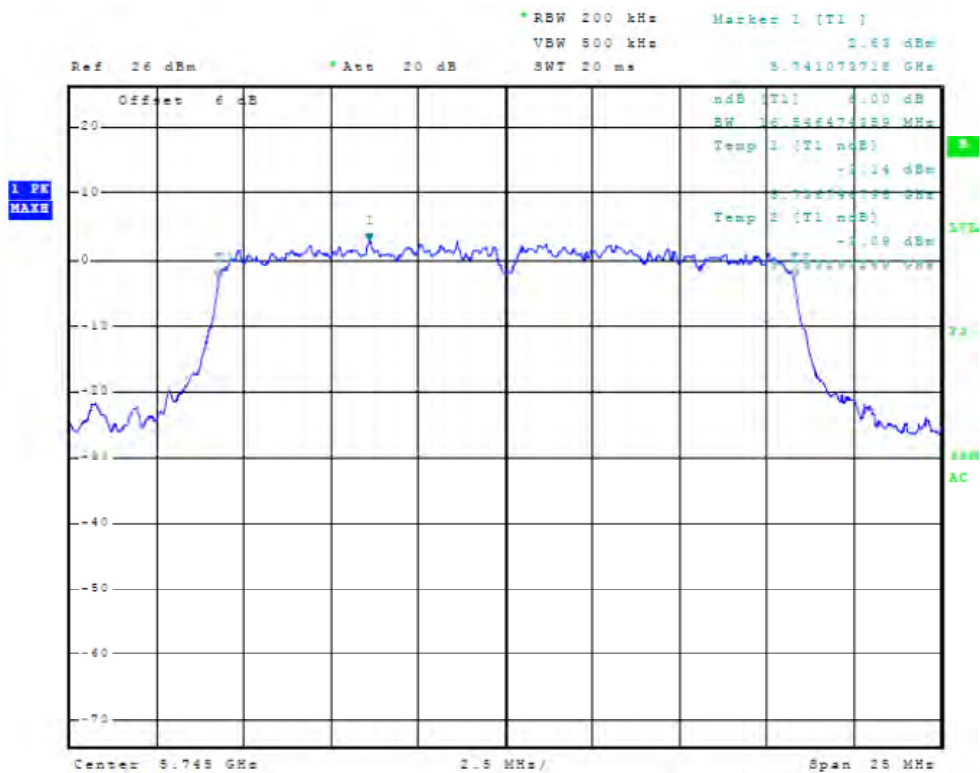


Figure 66 Plot of 6dB Band width (20 MHz OFDM Mode, 5745 MHz, Chain 1)

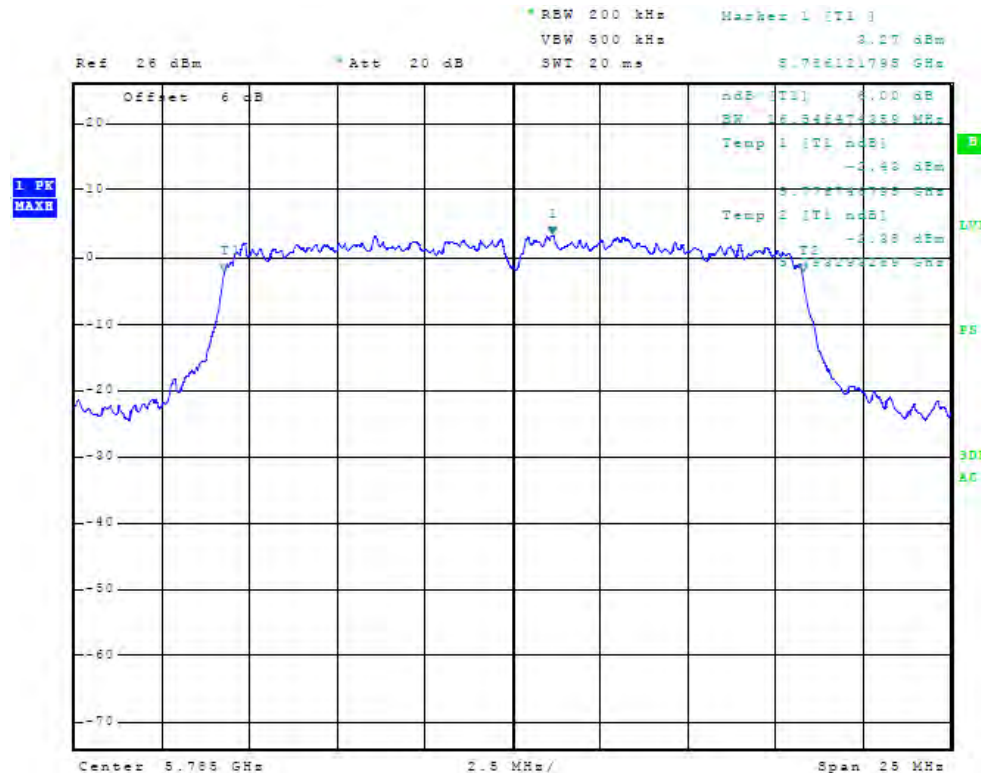


Figure 67 Plot of 6dB Band width (20 MHz OFDM Mode, 5785 MHz, Chain 1)

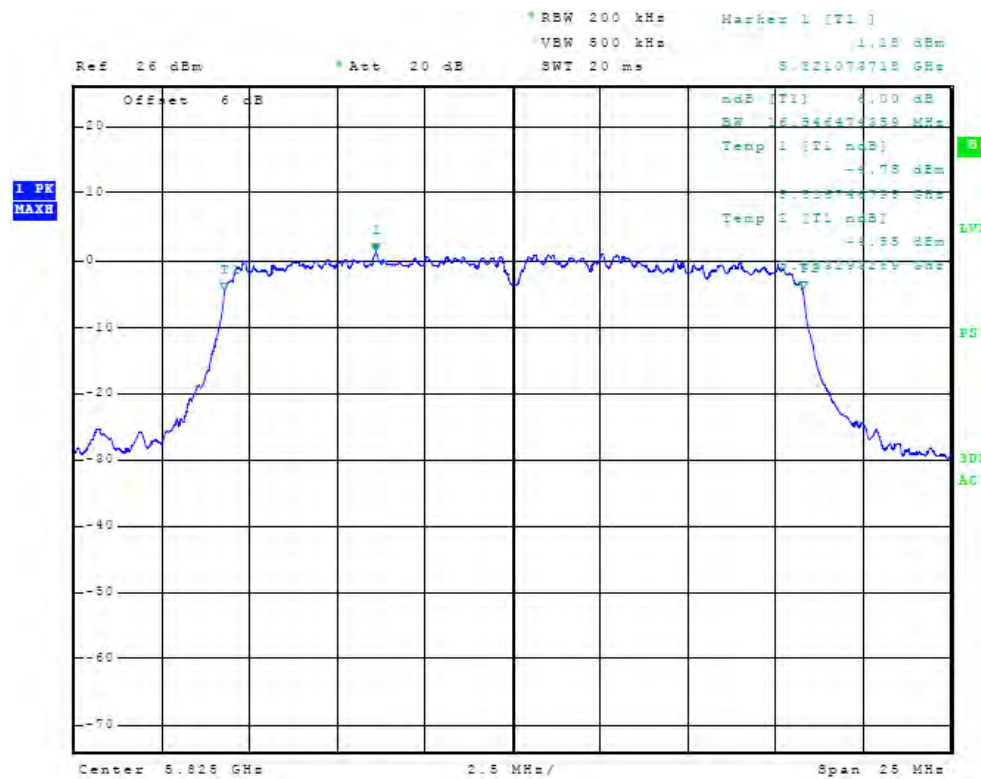


Figure 68 Plot of 6dB Band width (20 MHz OFDM Mode, 5825 MHz, Chain 1)

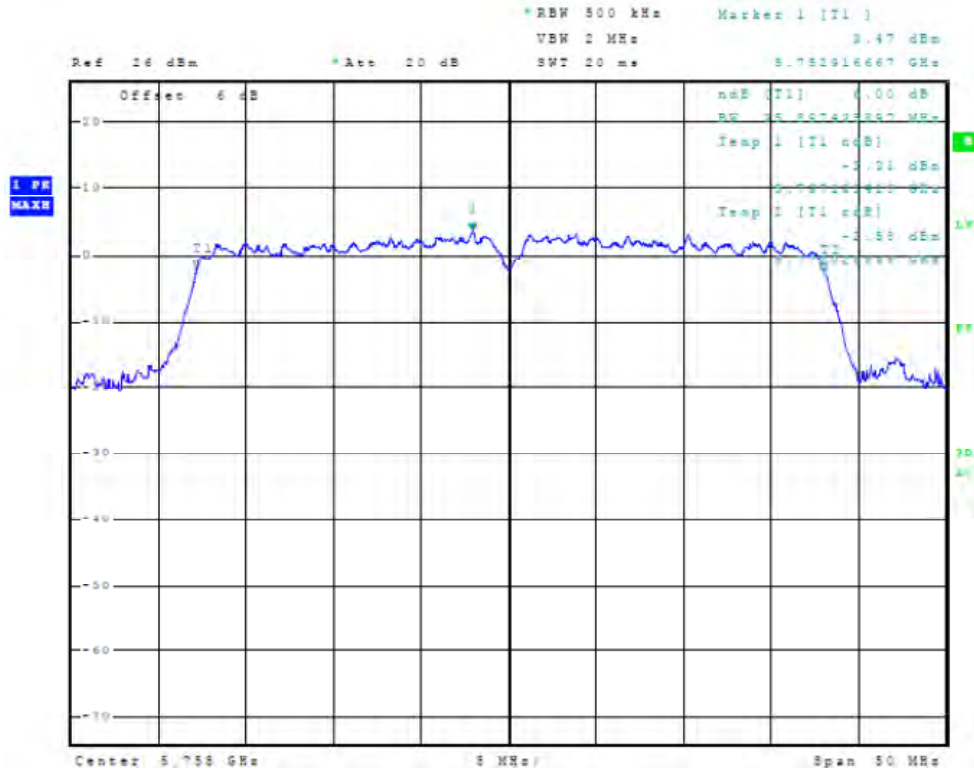


Figure 69 Plot of 6dB Band width (40 MHz N Mode, 5755 MHz, Chain 0)

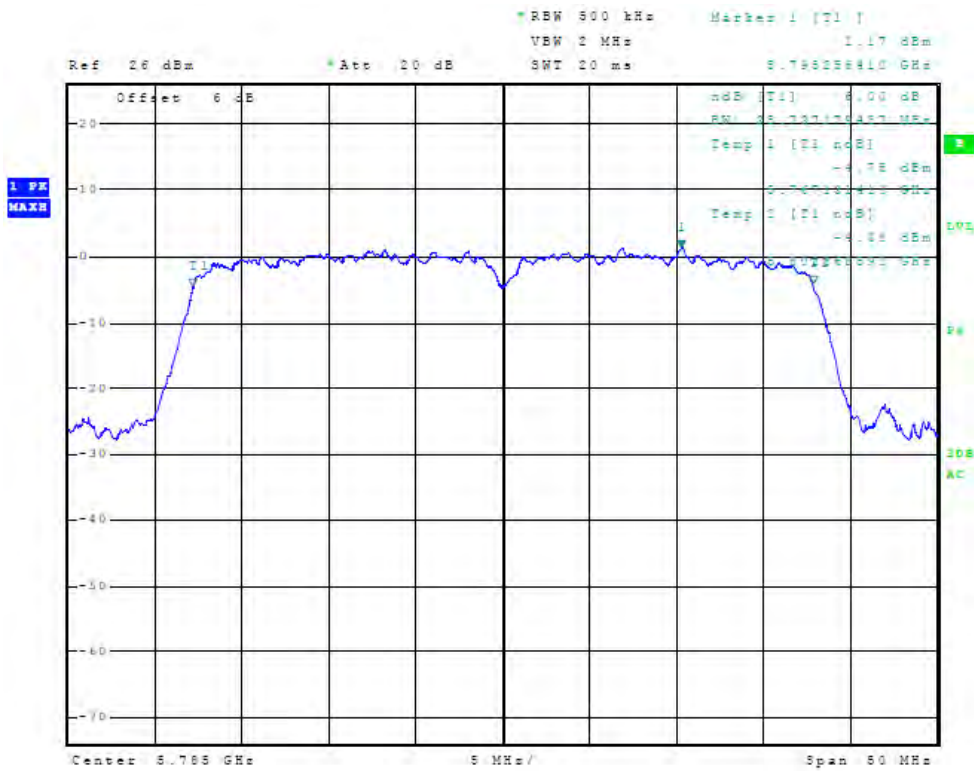


Figure 70 Plot of 6dB Band width (40 MHz N Mode, 5785 MHz, Chain 0)

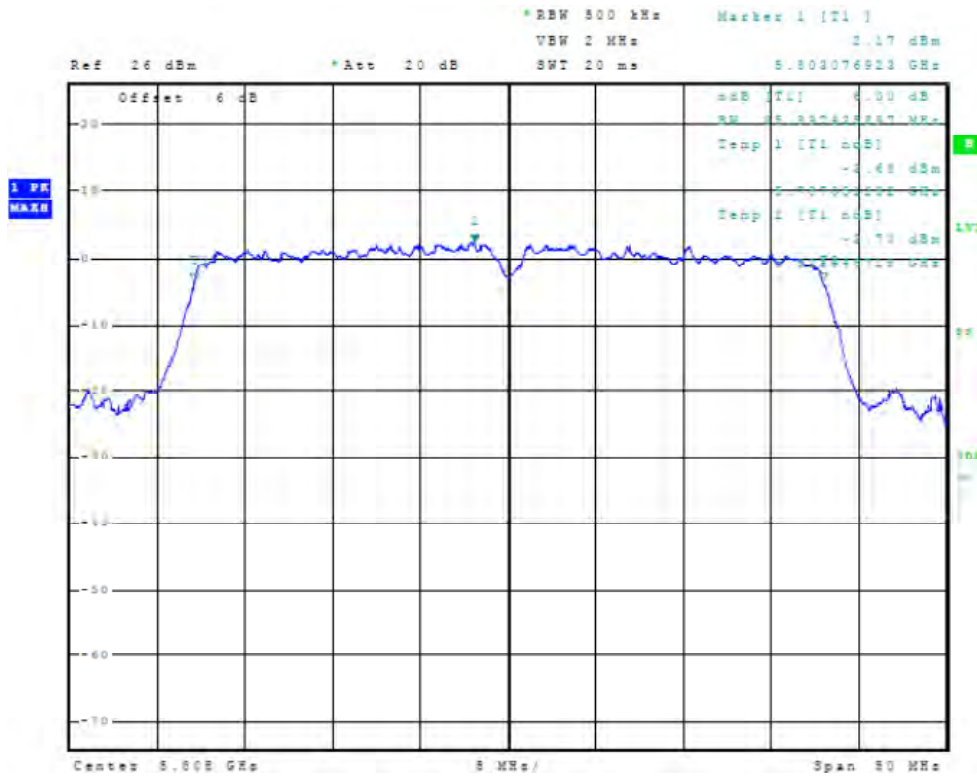


Figure 71 Plot of 6dB Band width (40 MHz N Mode, 5805 MHz, Chain 0)

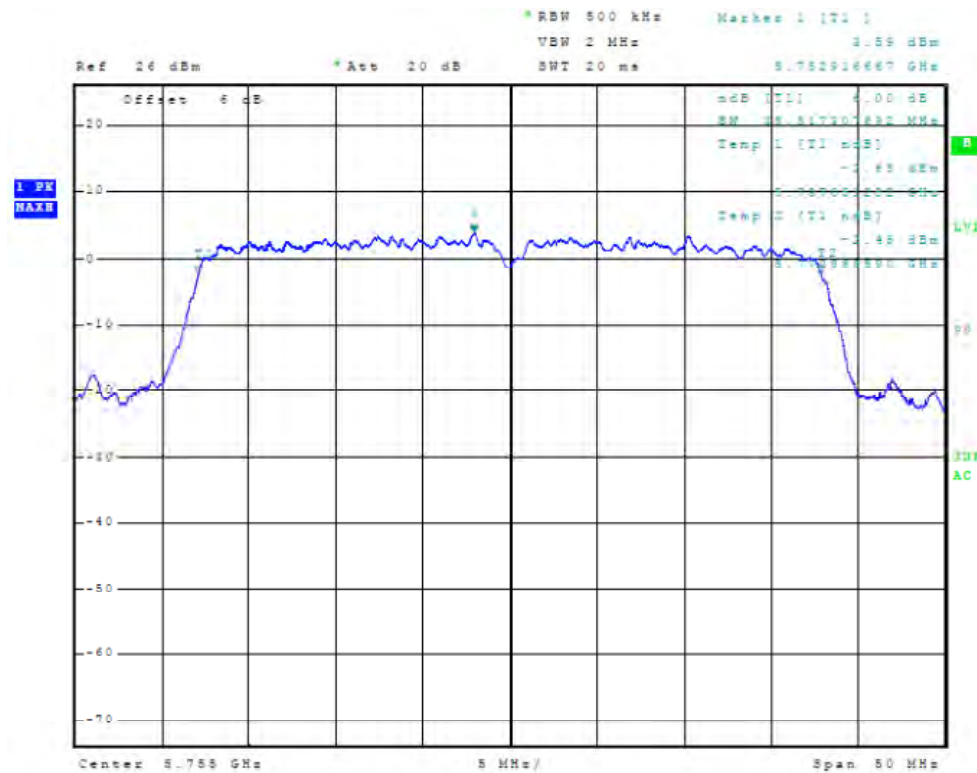


Figure 72 Plot of 6dB Band width (40 MHz N Mode, 5755 MHz, Chain 1)

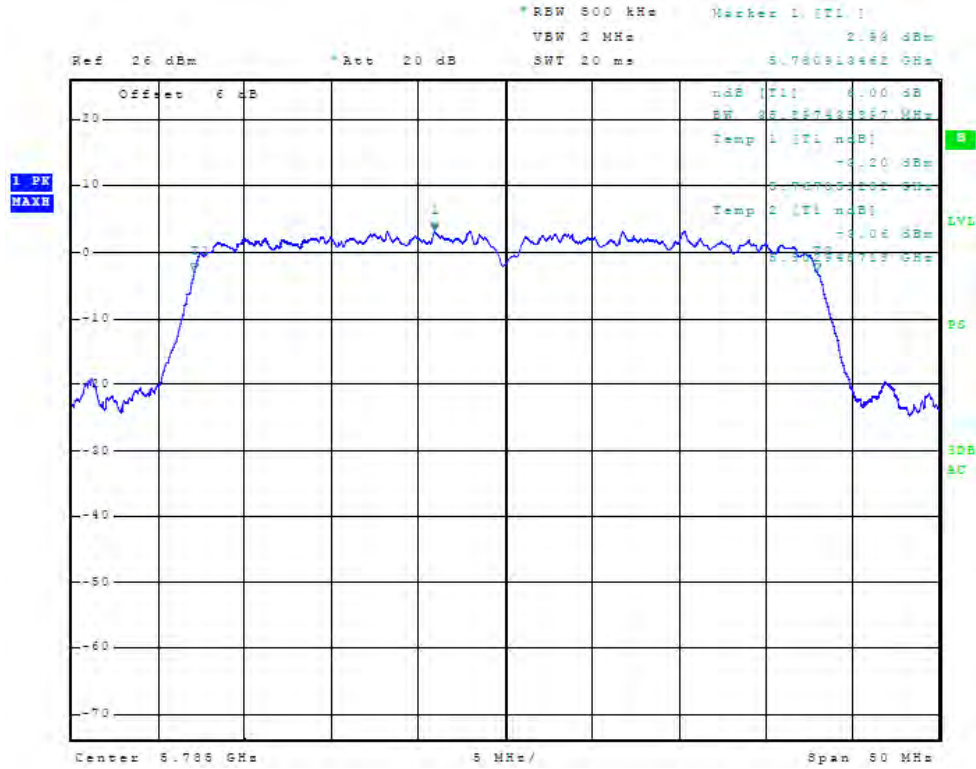


Figure 73 Plot of 6dB Band width (40 MHz N Mode, 5785 MHz, Chain 1)

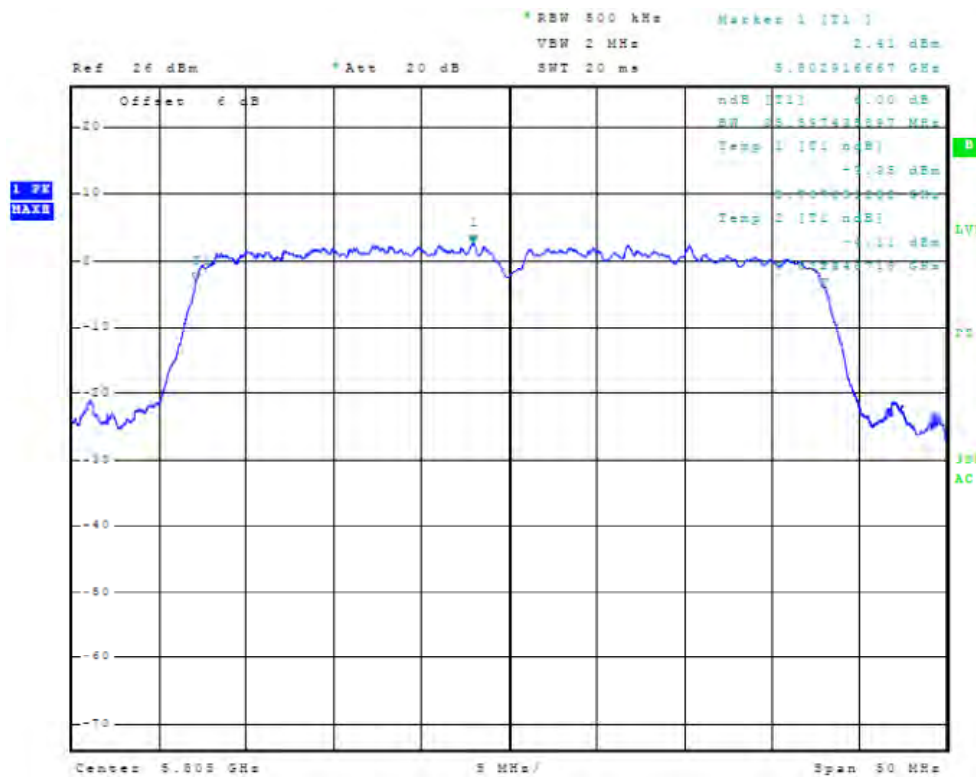


Figure 74 Plot of 6dB Band width (40 MHz N Mode, 5805 MHz, Chain 1)

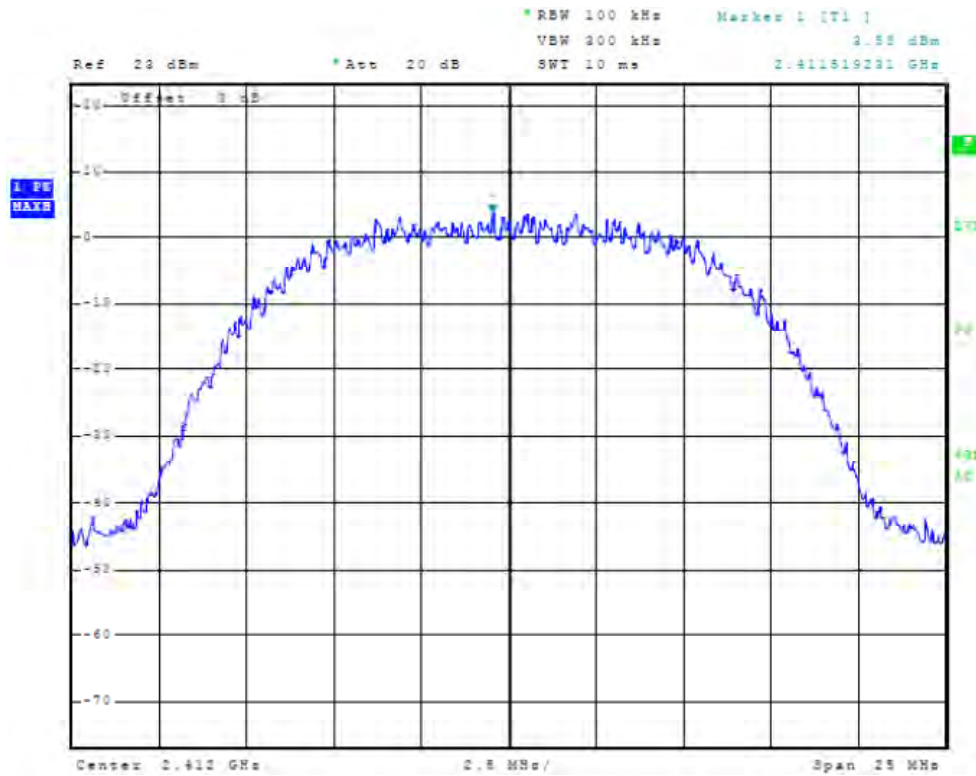


Figure 75 Plot of Power Spectral Density (20 MHz CCK Mode, 2412 MHz, Chain 0)

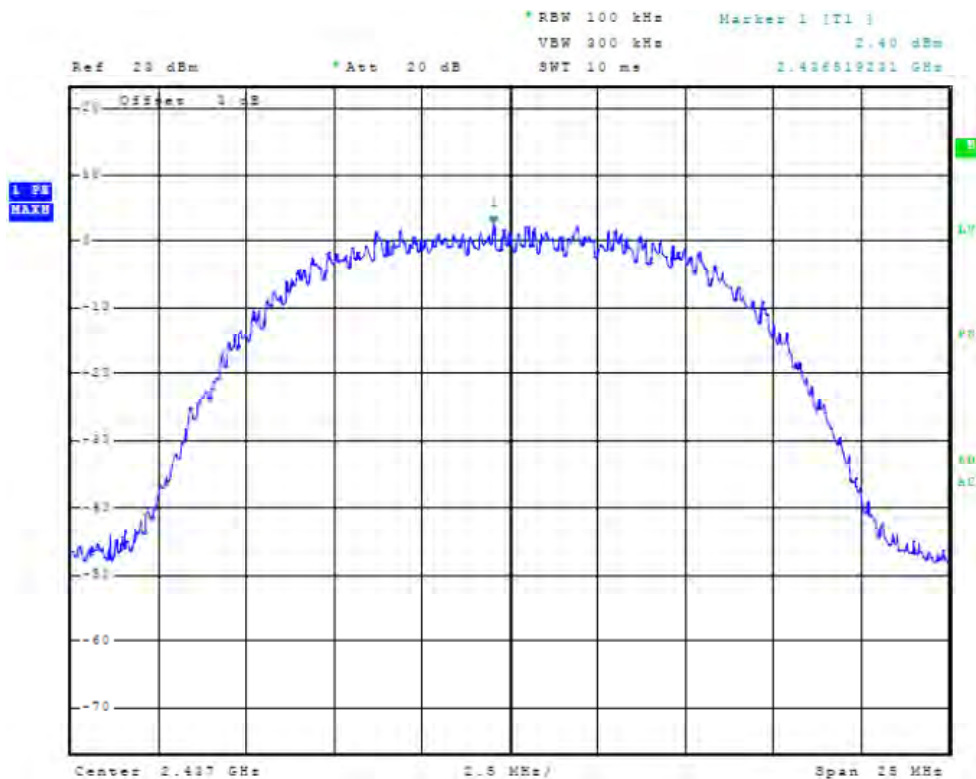


Figure 76 Plot of Power Spectral Density (20 MHz CCK Mode, 2437 MHz, Chain 0)

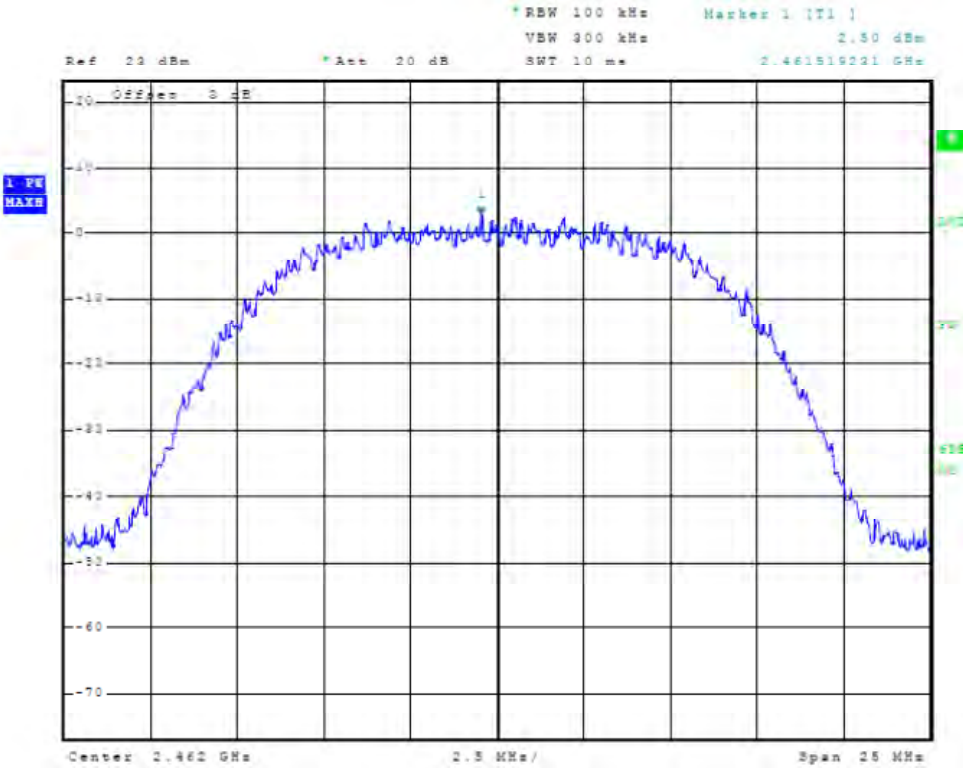


Figure 77 Plot of Power Spectral Density (20 MHz CCK Mode, 2462 MHz, Chain 0)

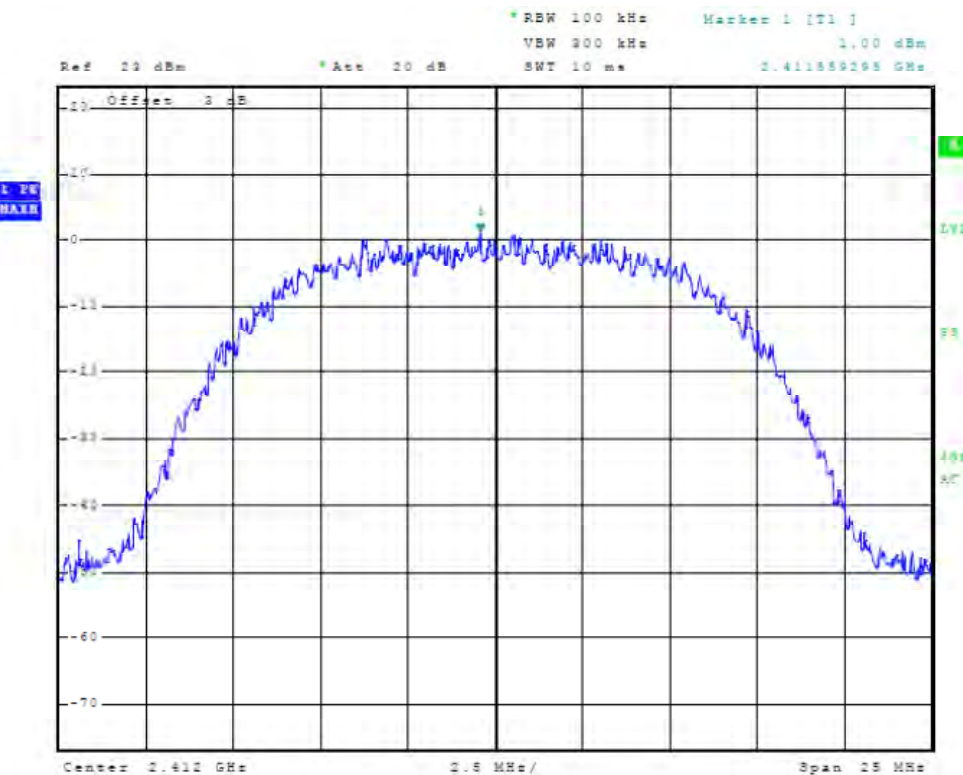


Figure 78 Plot of Power Spectral Density (20 MHz CCK Mode, 2412 MHz, Chain 1)

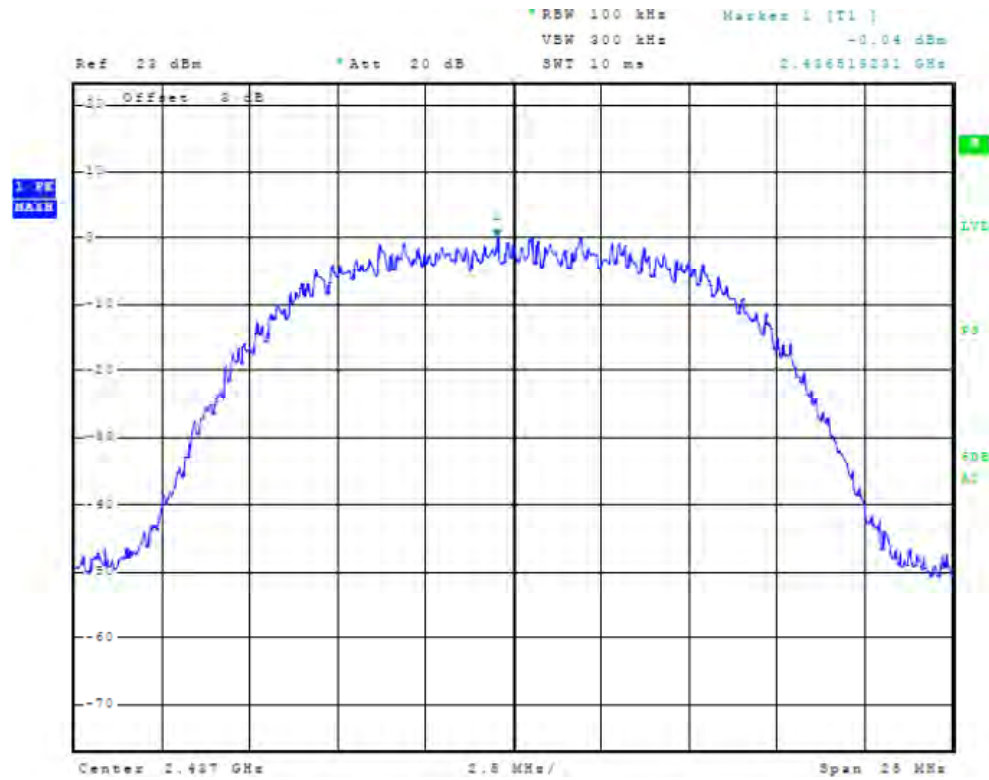


Figure 79 Plot of Power Spectral Density (20 MHz CCK Mode, 2437 MHz, Chain 1)

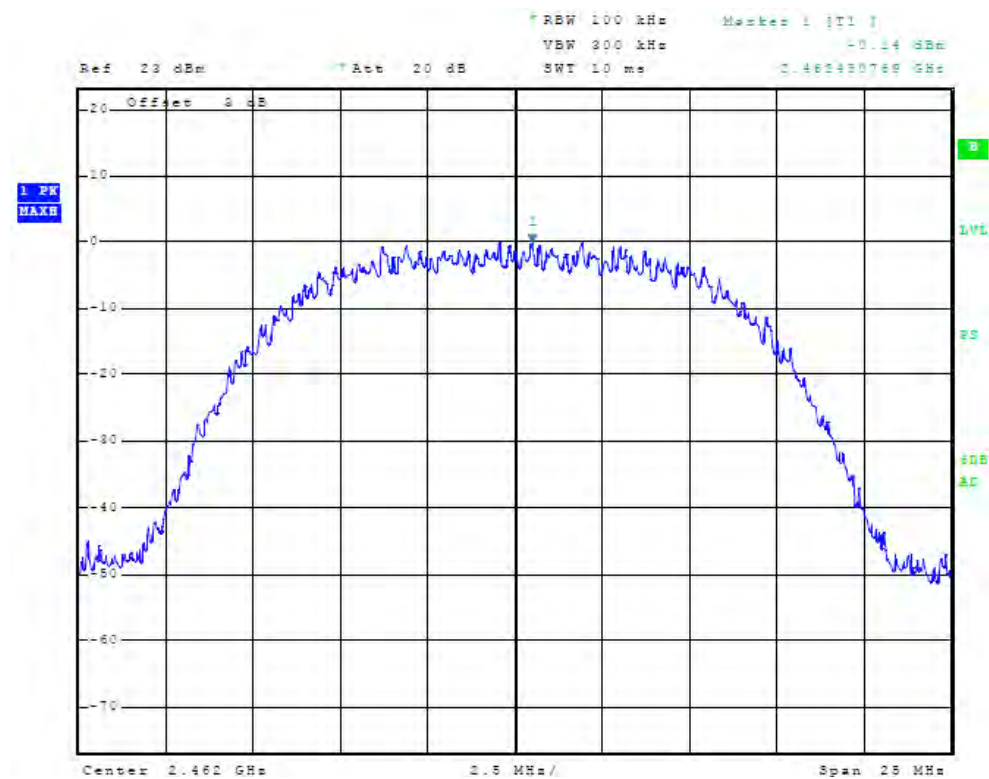


Figure 80 Plot of Power Spectral Density (20 MHz CCK Mode, 2462 MHz, Chain 1)

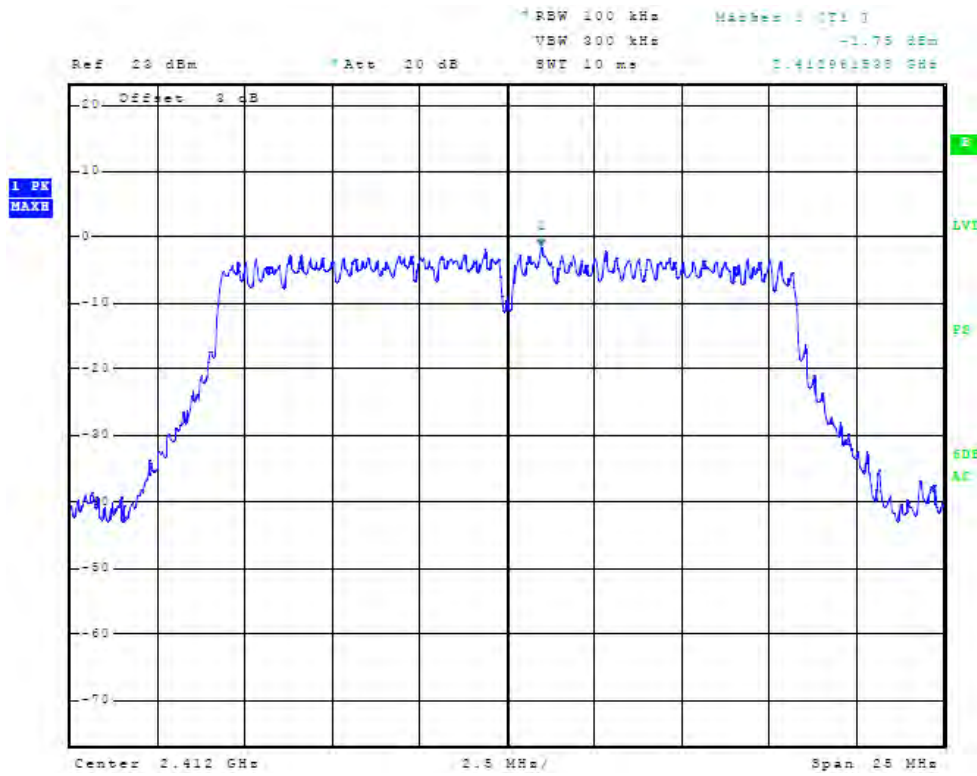


Figure 81 Plot of Power Spectral Density (20 MHz OFDM Mode, 2412 MHz, Chain 0)

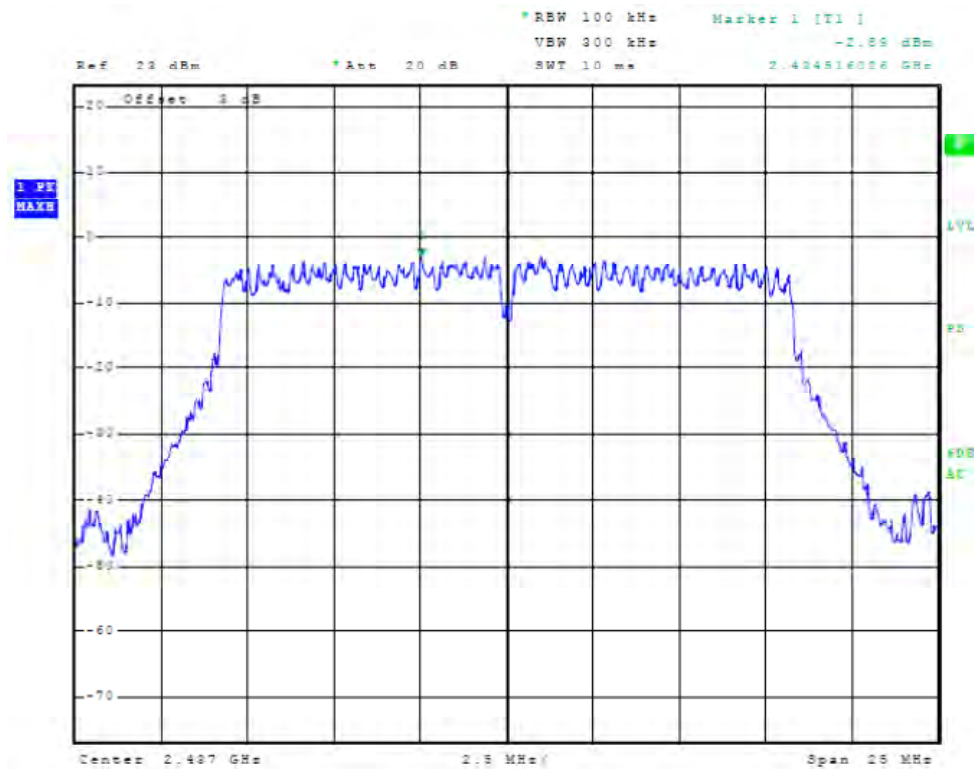


Figure 82 Plot of Power Spectral Density (20 MHz OFDM Mode, 2437 MHz, Chain 0)

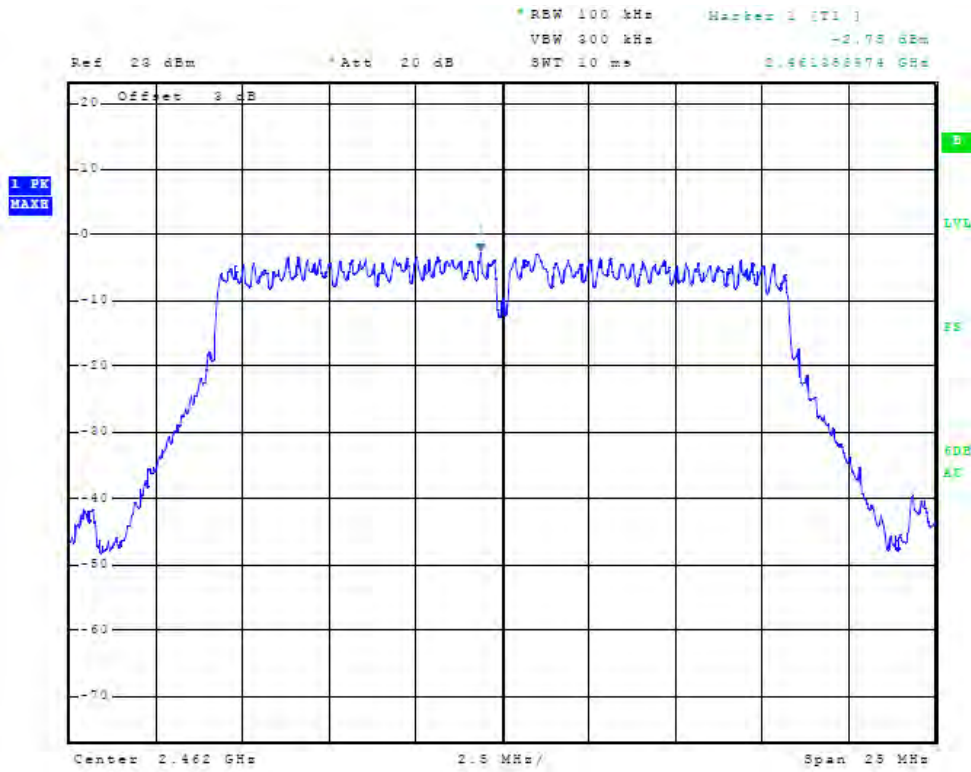


Figure 83 Plot of Power Spectral Density (20 MHz OFDM Mode, 2462 MHz, Chain 0)

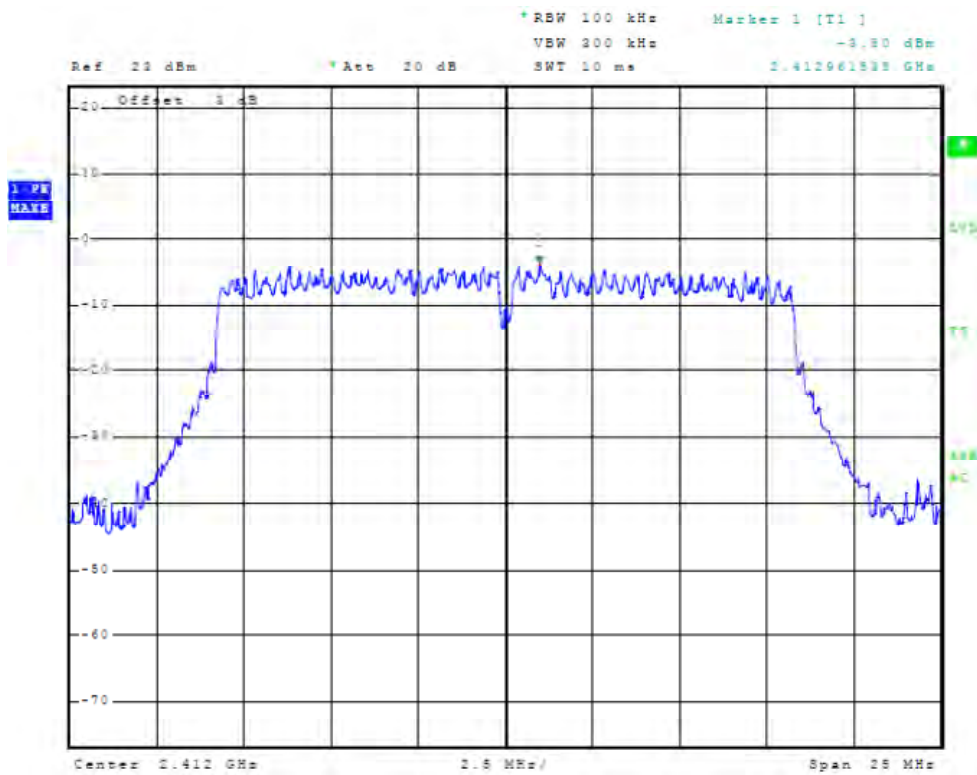


Figure 84 Plot of Power Spectral Density (20 MHz OFDM Mode, 2412 MHz, Chain 1)

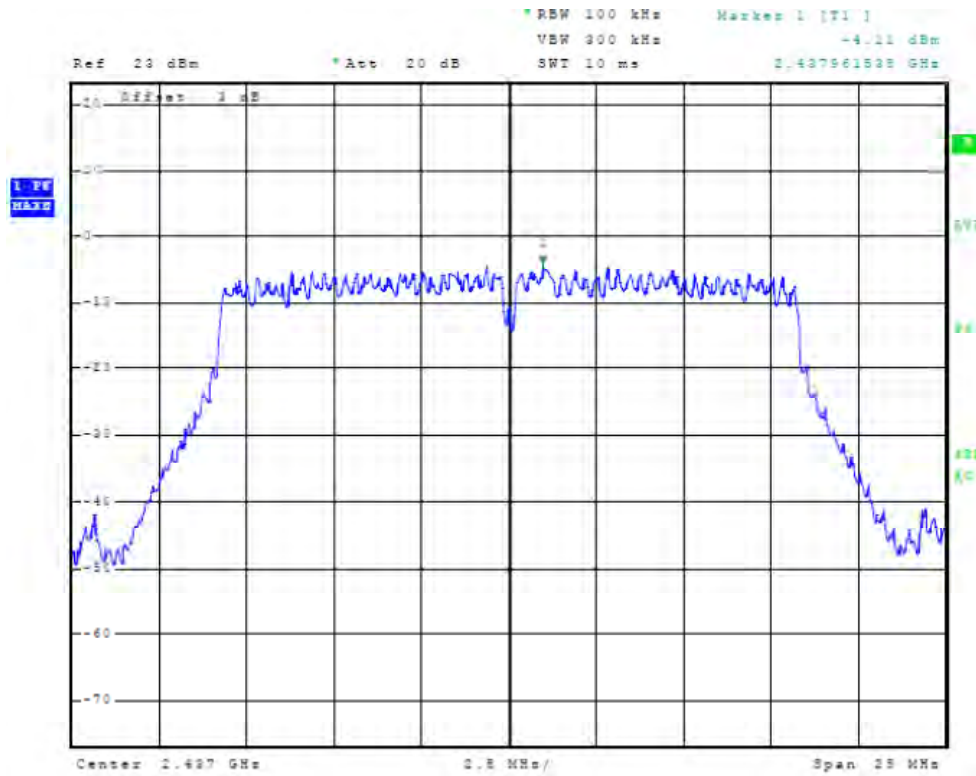


Figure 85 Plot of Power Spectral Density (20 MHz OFDM Mode, 2437 MHz, Chain 1)

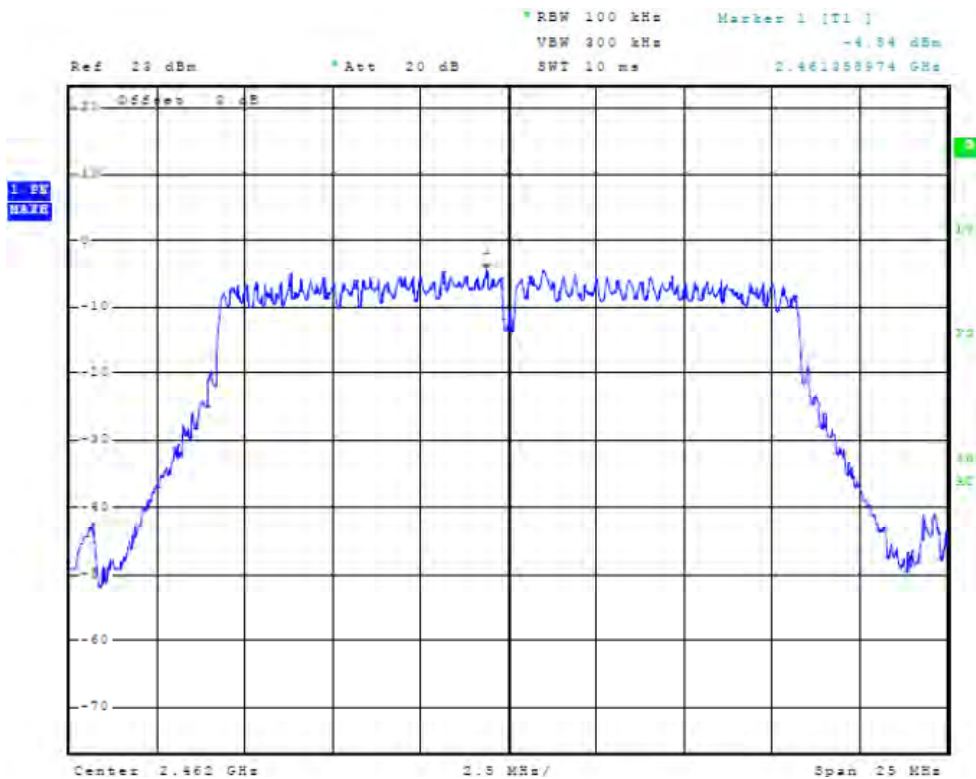


Figure 86 Plot of Power Spectral Density (20 MHz OFDM Mode, 2462 MHz, Chain 1)

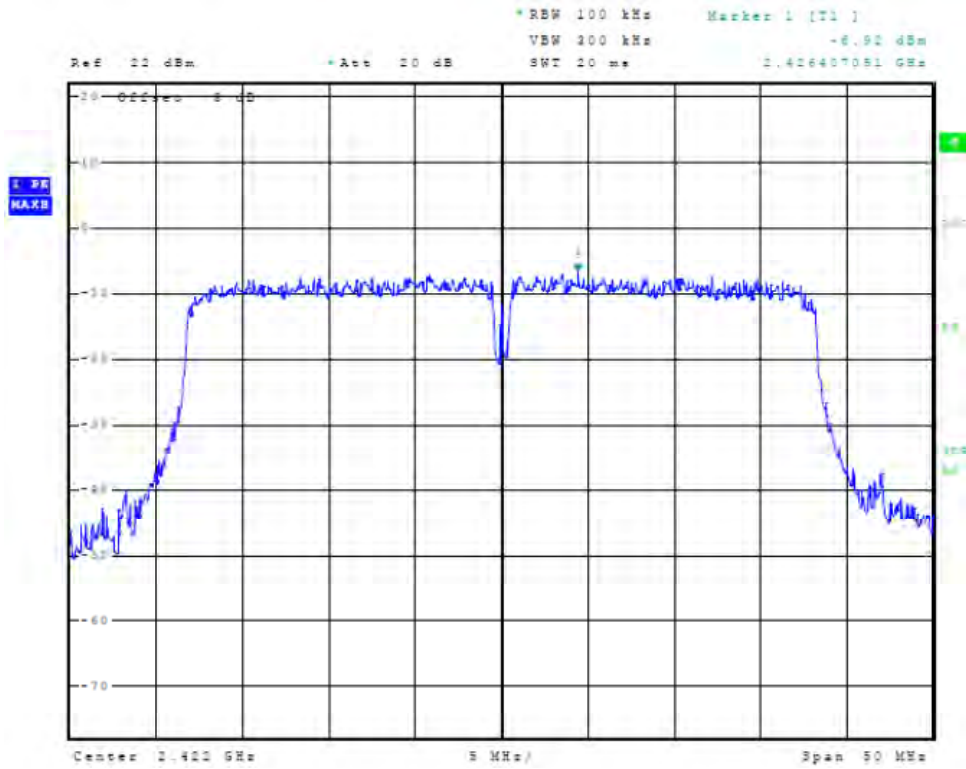


Figure 87 Plot of Power Spectral Density (40 MHz N Mode, 2422 MHz, Chain 0)

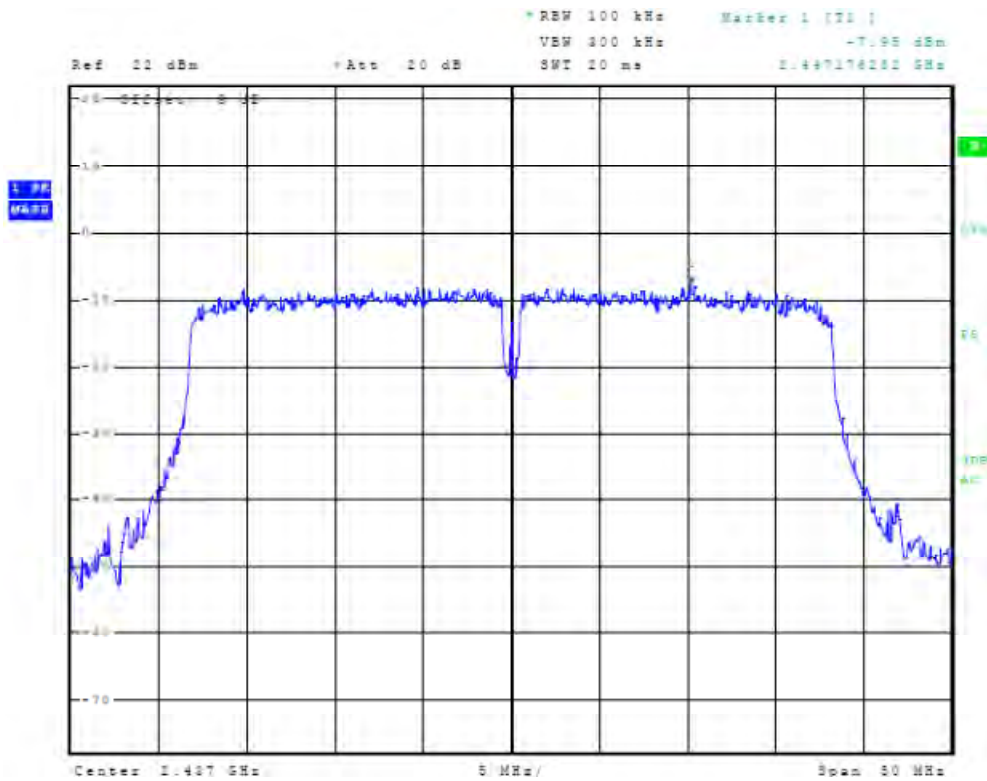


Figure 88 Plot of Power Spectral Density (40 MHz N Mode, 2437 MHz, Chain 0)

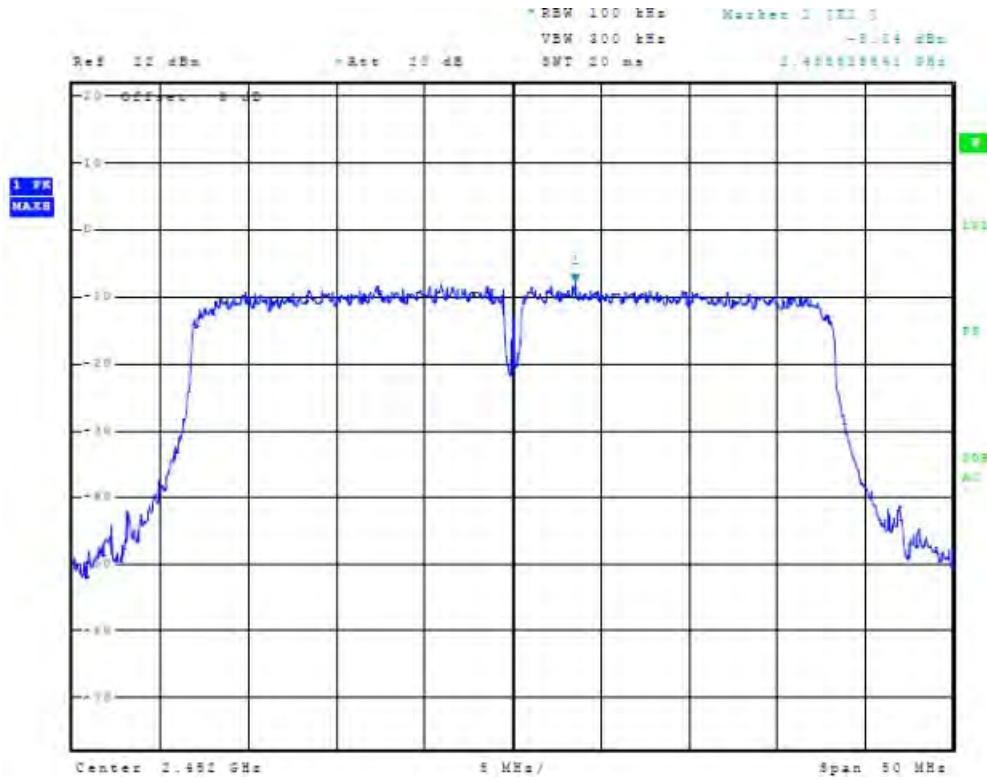


Figure 89 Plot of Power Spectral Density (40 MHz N Mode, 2452 MHz, Chain 0)

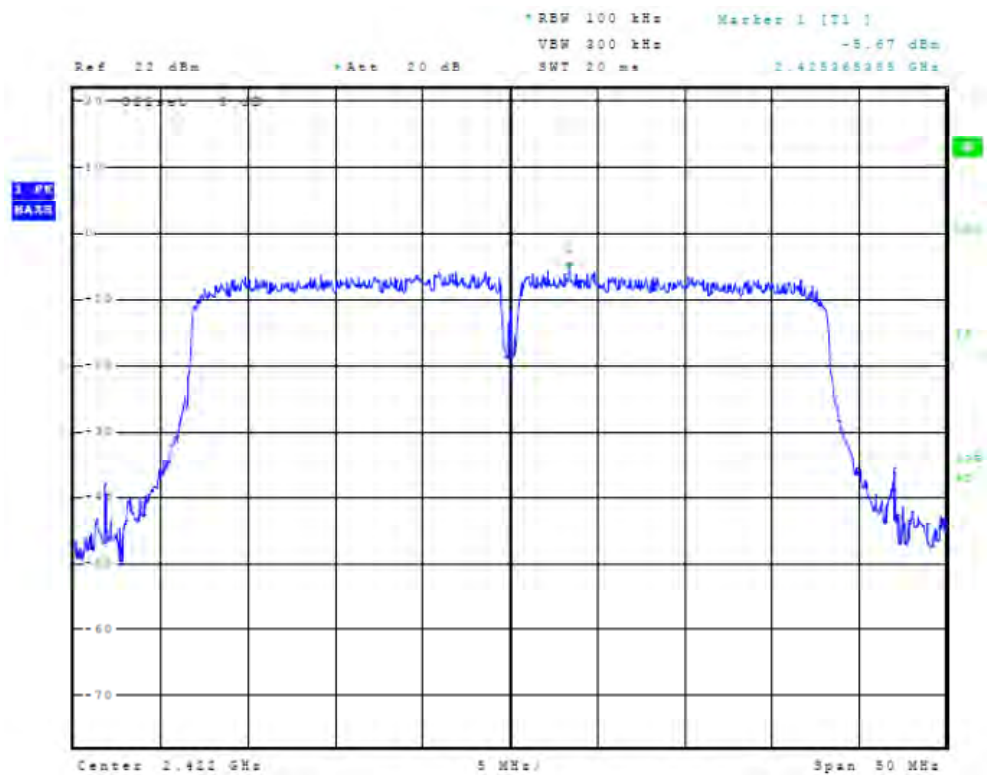


Figure 90 Plot of Power Spectral Density (40 MHz N Mode, 2422 MHz, Chain 1)



Figure 91 Plot of Power Spectral Density (40 MHz N Mode, 2437 MHz, Chain 1)



Figure 92 Plot of Power Spectral Density (40 MHz N Mode, 2452 MHz, Chain 1)



Figure 93 Plot of Power Spectral Density (20 MHz CCK Mode, 5745 MHz, Chain 0)

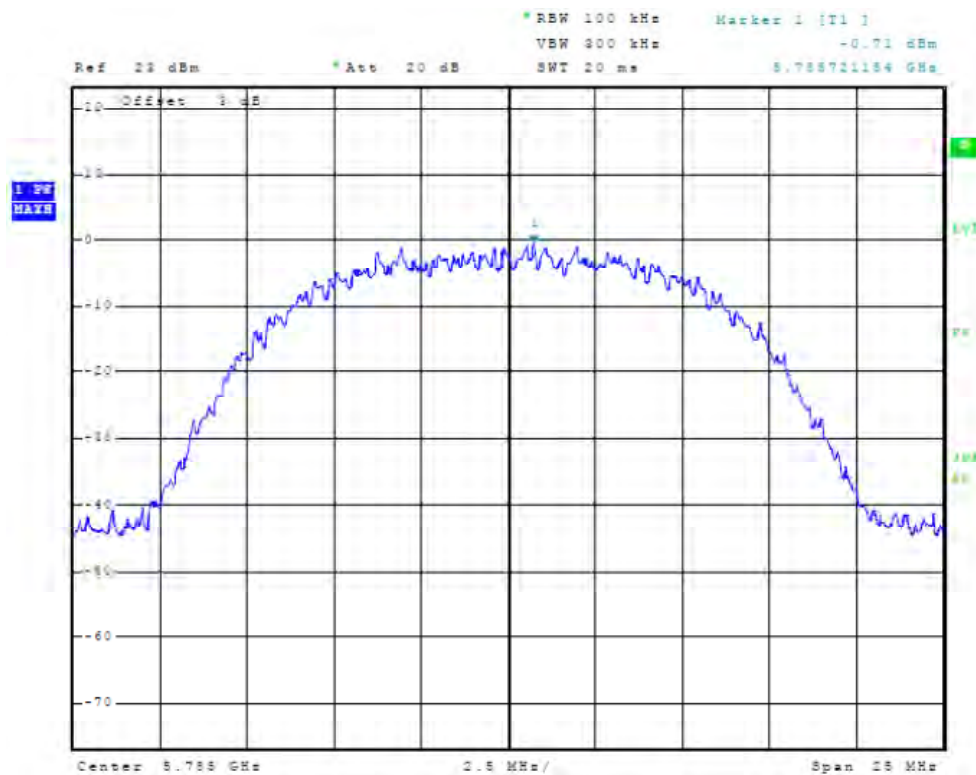


Figure 94 Plot of Power Spectral Density (20 MHz CCK Mode, 5785 MHz, Chain 0)

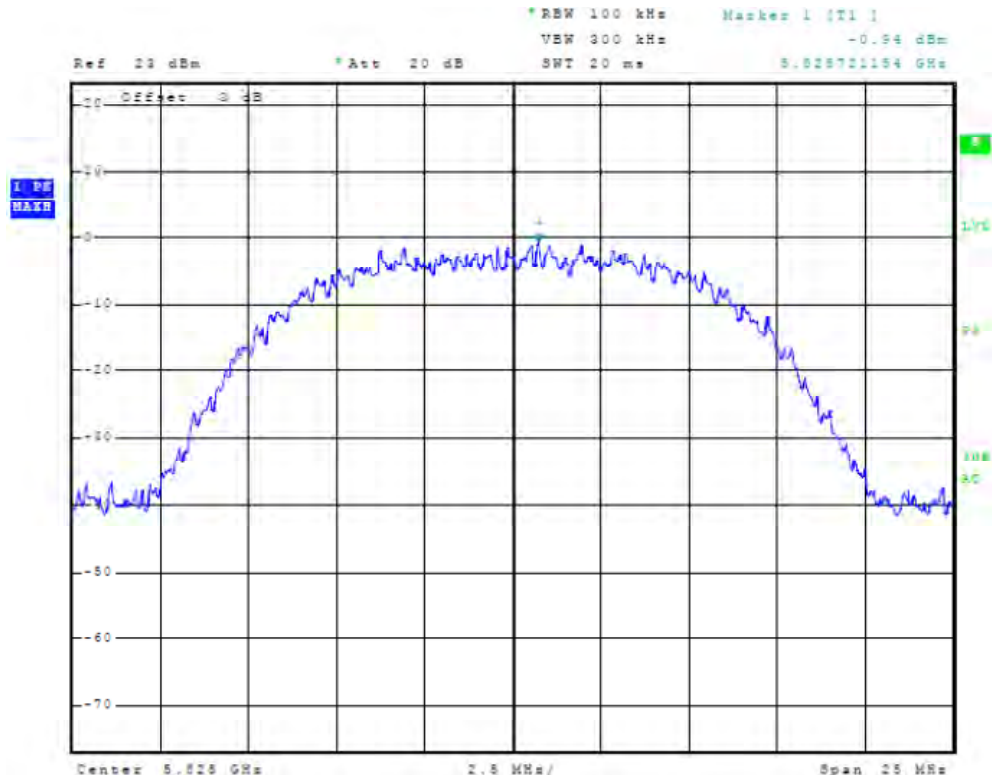


Figure 95 Plot of Power Spectral Density (20 MHz CCK Mode, 5825 MHz, Chain 0)

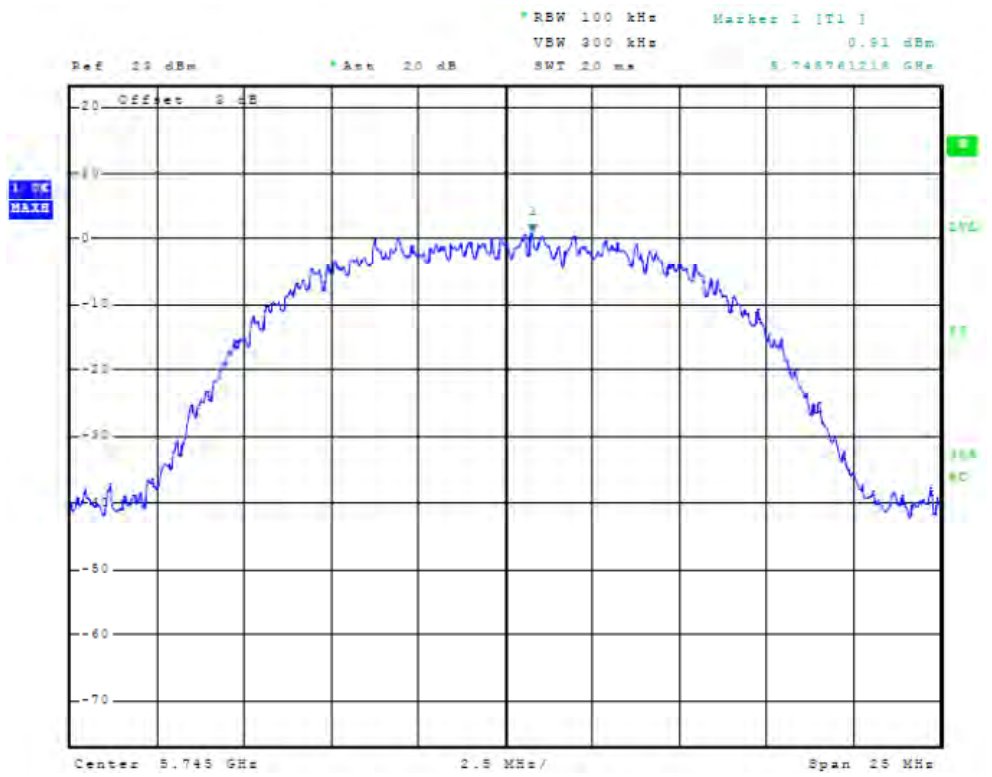


Figure 96 Plot of Power Spectral Density (20 MHz CCK Mode, 5745 MHz, Chain 1)

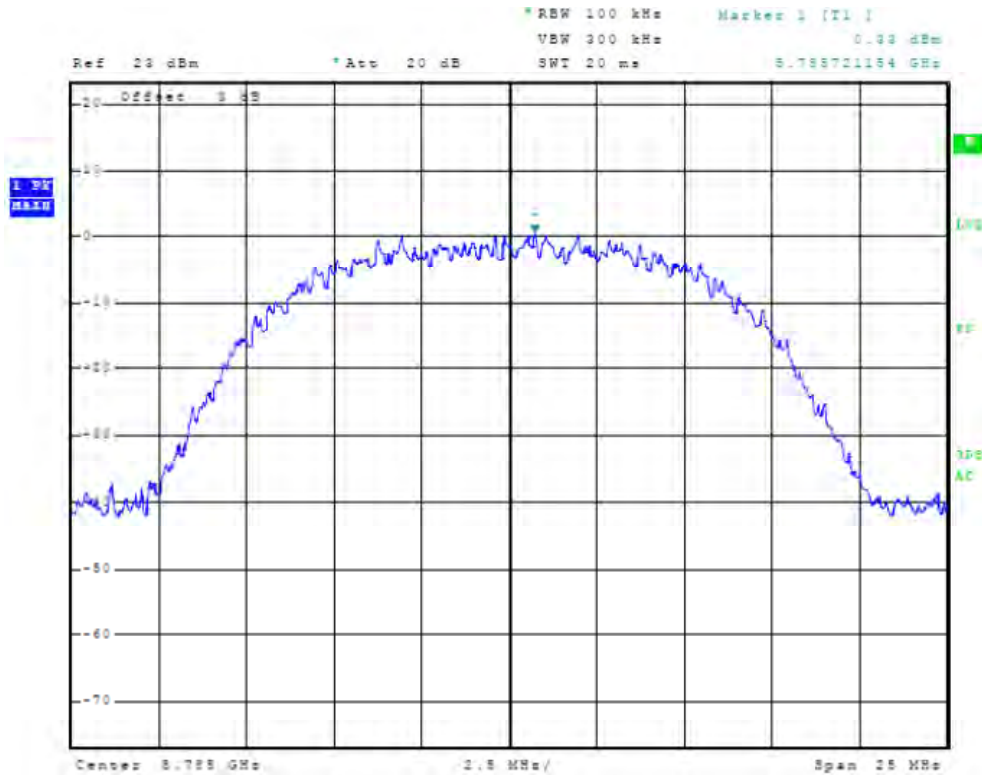


Figure 97 Plot of Power Spectral Density (20 MHz CCK Mode, 5785 MHz, Chain 1)

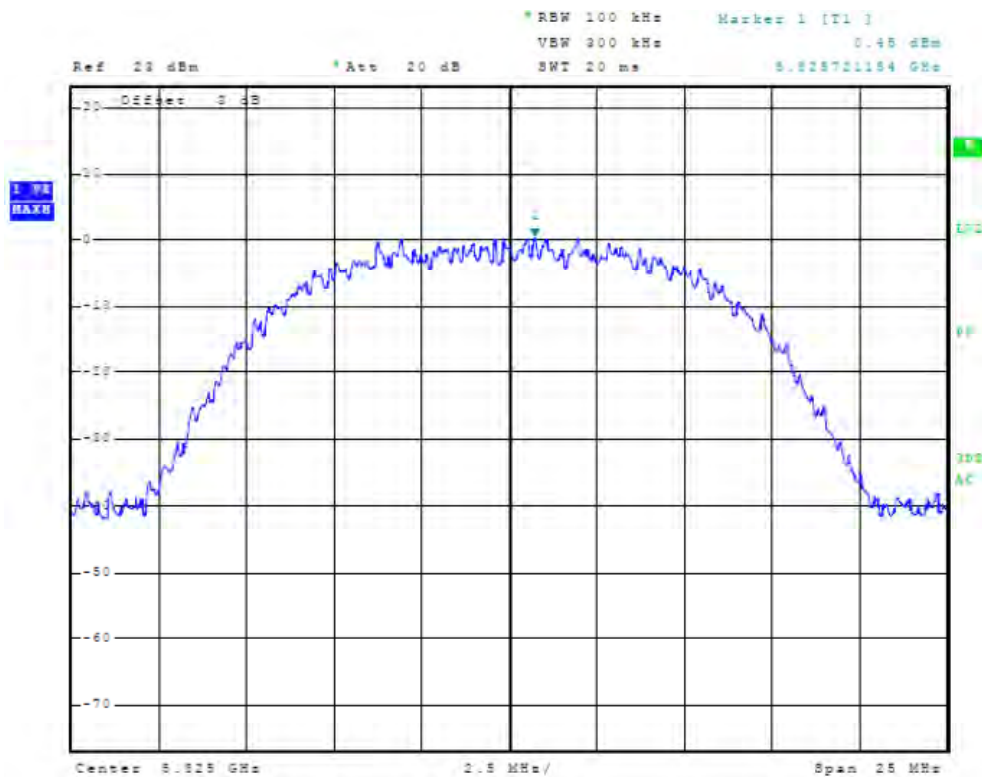


Figure 98 Plot of Power Spectral Density (20 MHz CCK Mode, 5825 MHz, Chain 1)

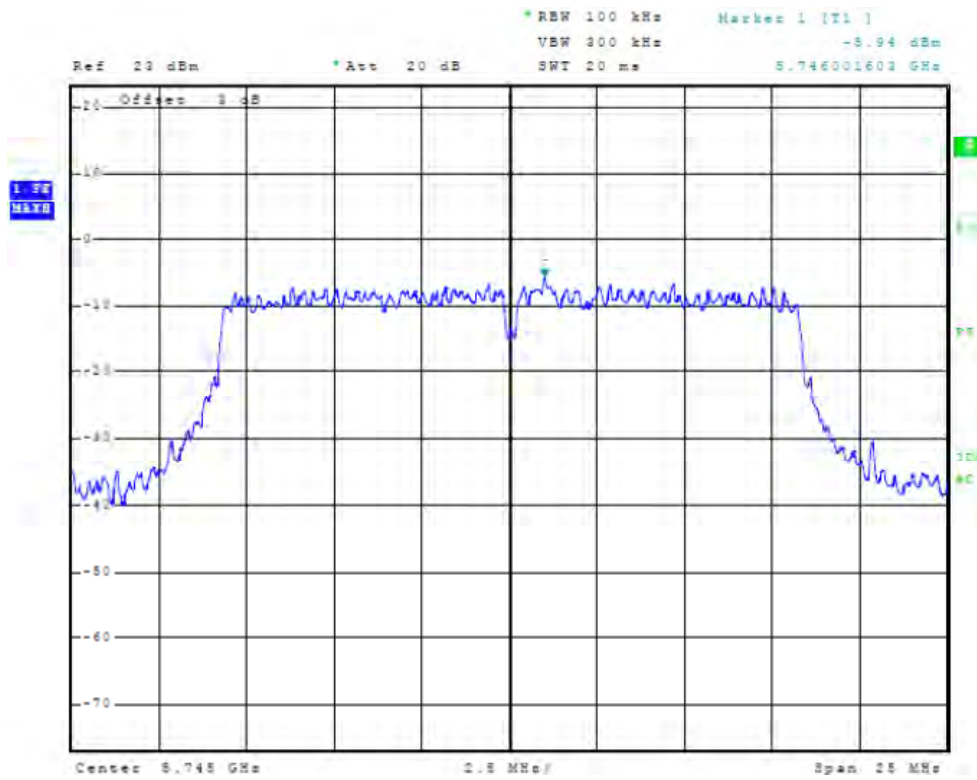


Figure 99 Plot of Power Spectral Density (20 MHz OFDM Mode, 5745 MHz, Chain 0)

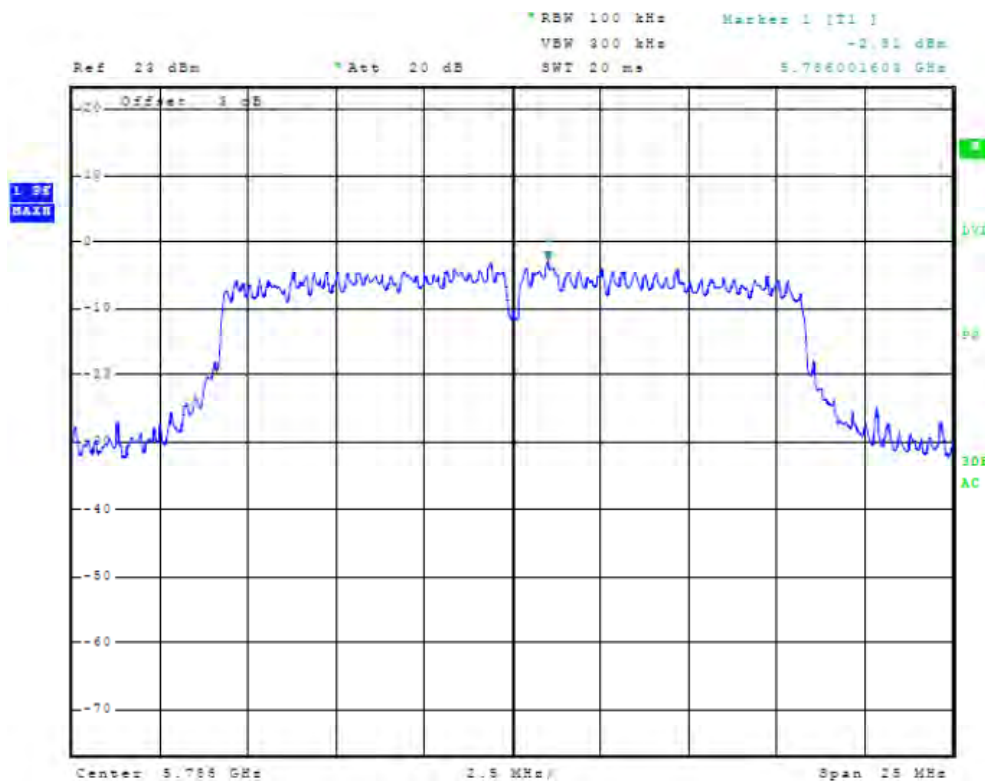


Figure 100 Plot of Power Spectral Density (20 MHz OFDM Mode, 5785 MHz, Chain 0)

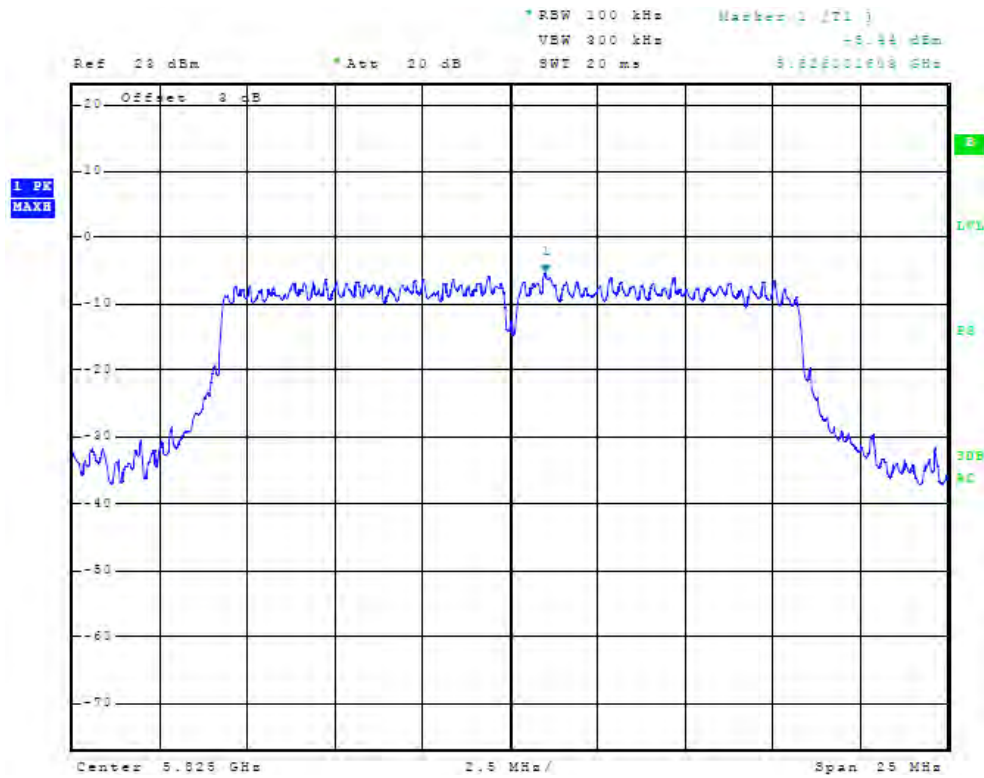


Figure 101 Plot of Power Spectral Density (20 MHz OFDM Mode, 5825 MHz, Chain 0)

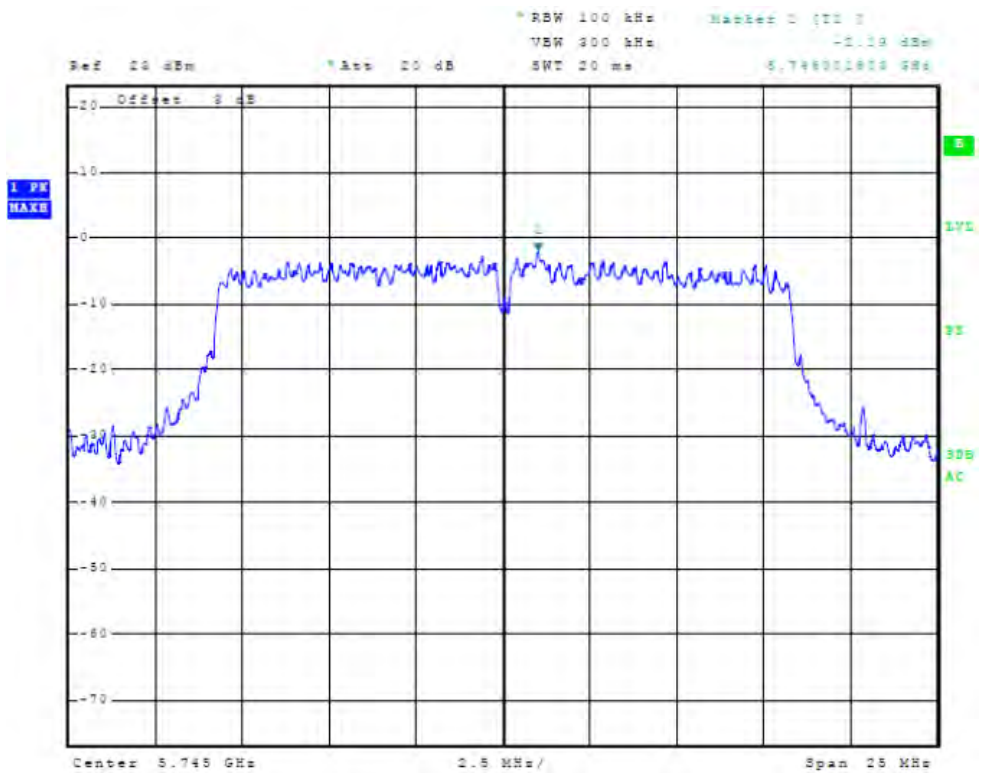


Figure 102 Plot of Power Spectral Density (20 MHz OFDM Mode, 5745 MHz, Chain 1)

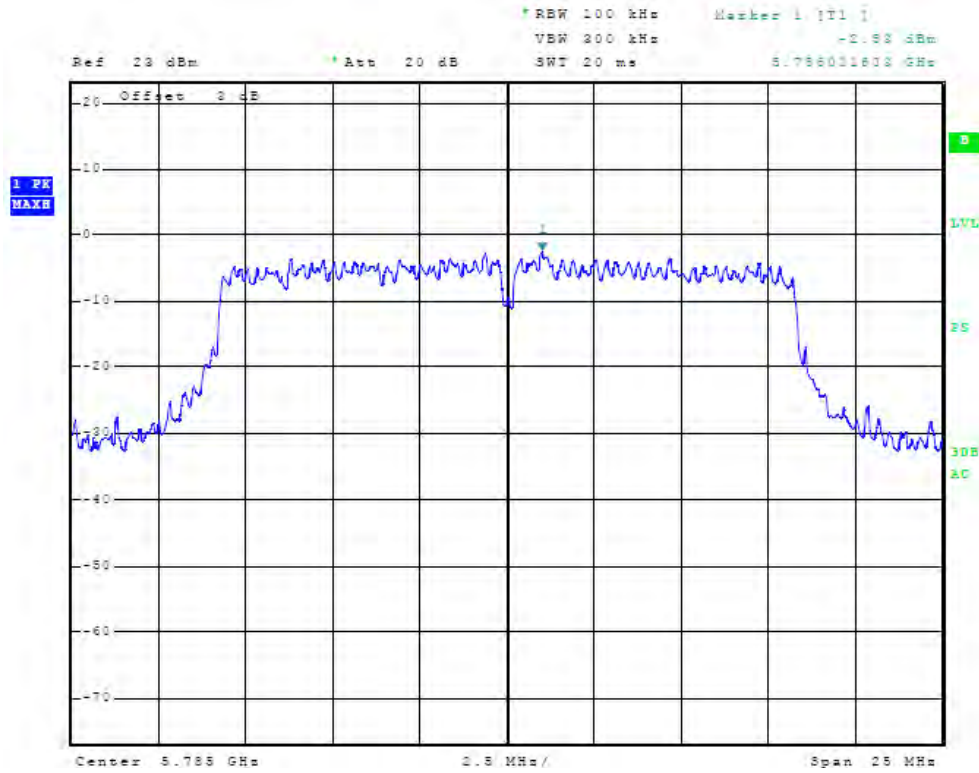


Figure 103 Plot of Power Spectral Density (20 MHz OFDM Mode, 5785 MHz, Chain 1)

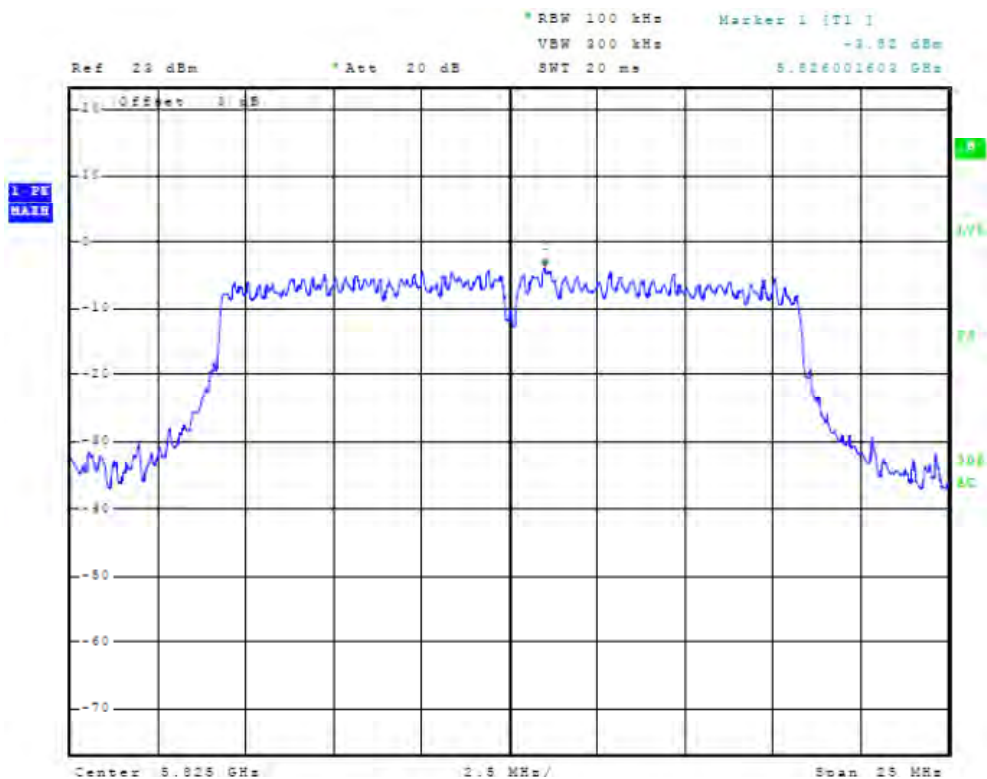


Figure 104 Plot of Power Spectral Density (20 MHz OFDM Mode, 5825 MHz, Chain 1)

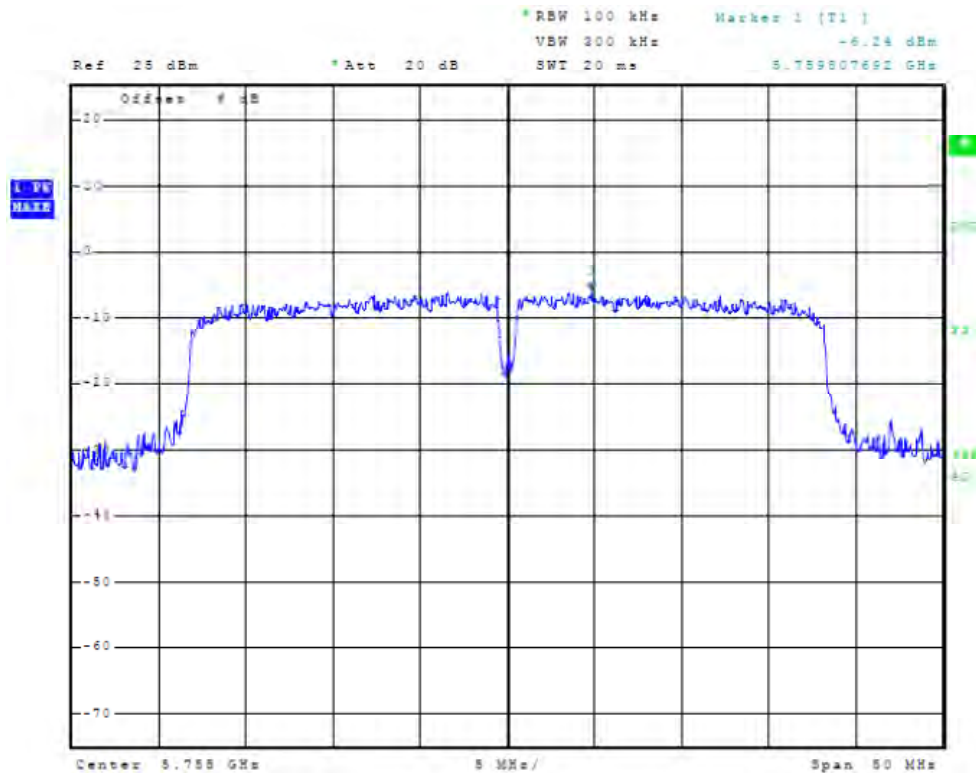


Figure 105 Plot of Power Spectral Density (40 MHz N Mode, 5755 MHz, Chain 0)

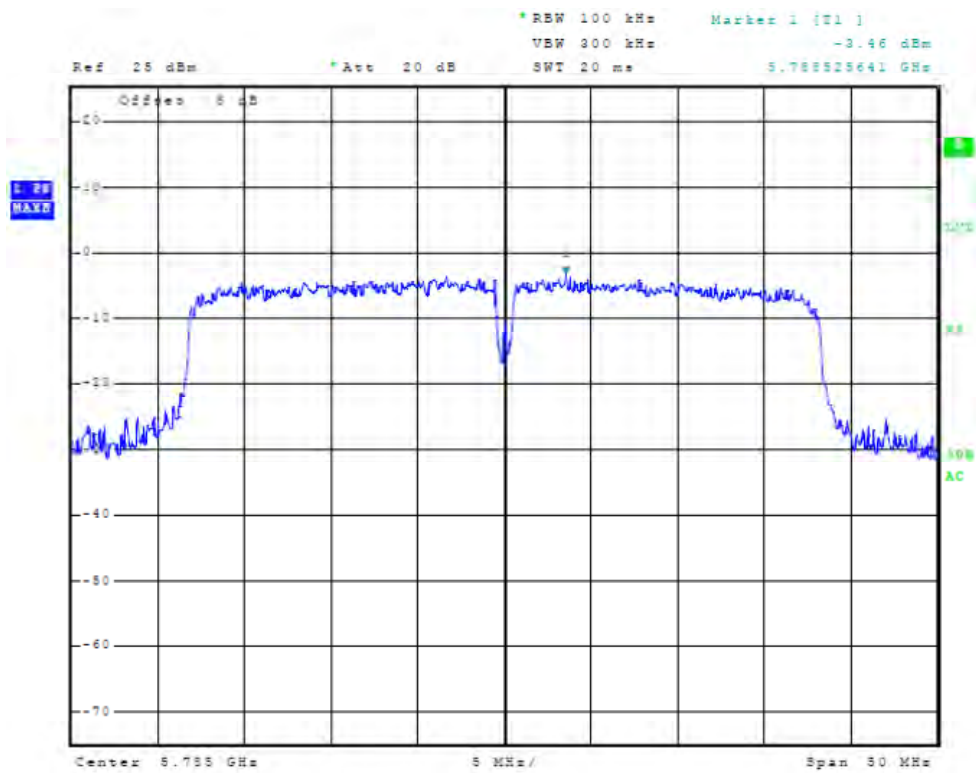


Figure 106 Plot of Power Spectral Density (40 MHz N Mode, 5785 MHz, Chain 0)

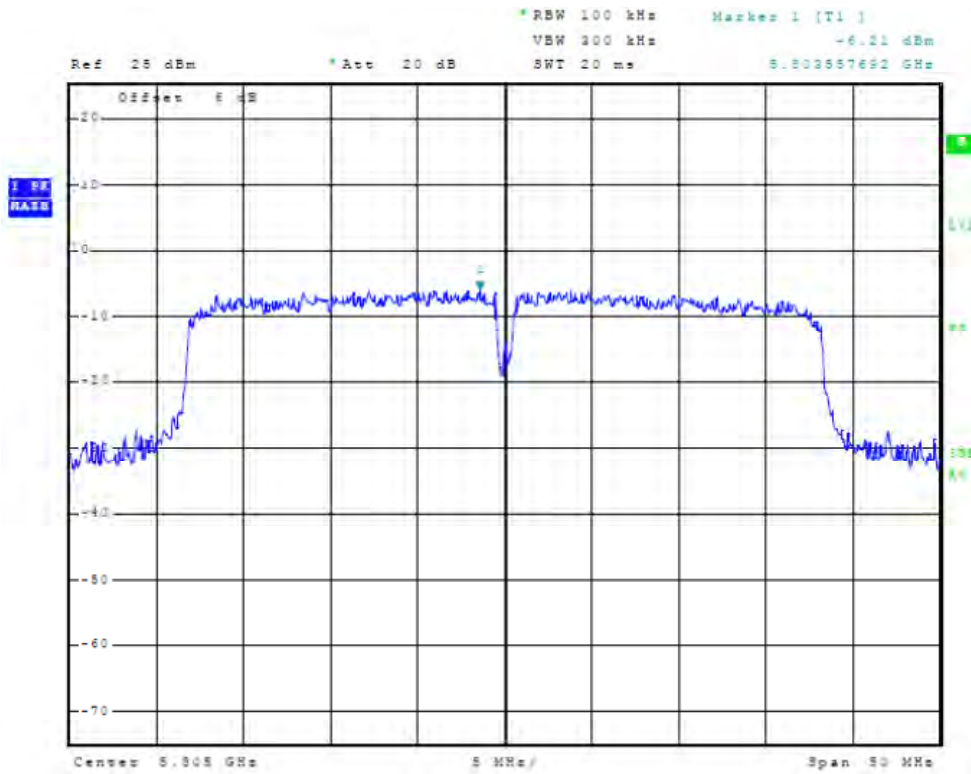


Figure 107 Plot of Power Spectral Density (40 MHz N Mode, 5805 MHz, Chain 0)

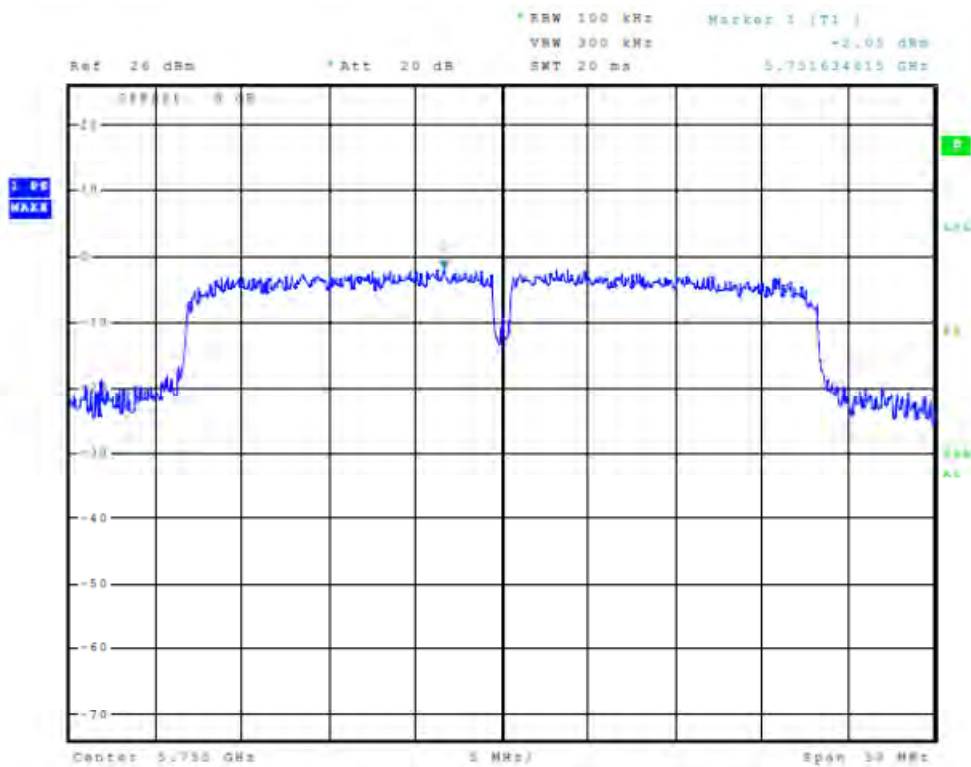


Figure 108 Plot of Power Spectral Density (40 MHz N Mode, 5755 MHz, Chain 1)

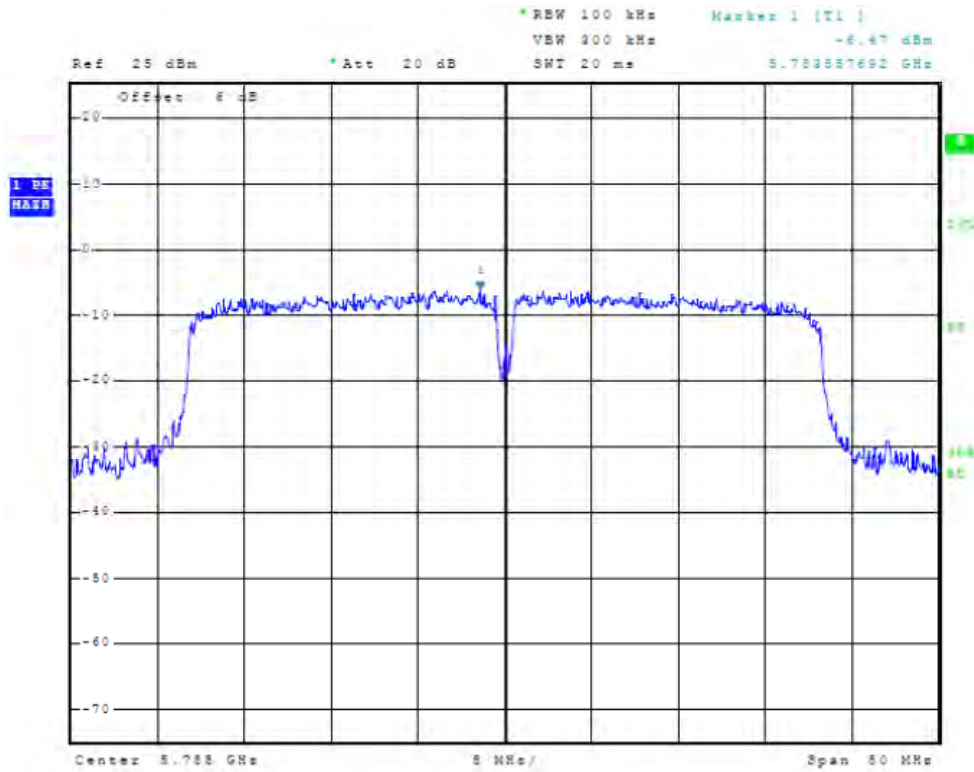


Figure 109 Plot of Power Spectral Density (40 MHz N Mode, 5785 MHz, Chain 1)

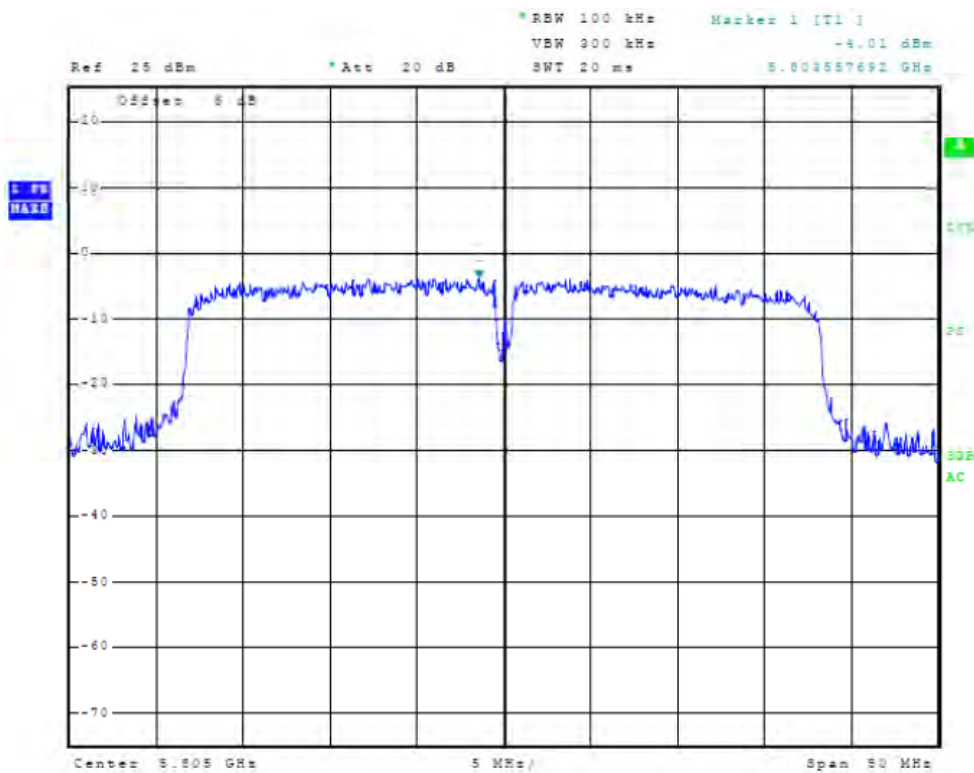


Figure 110 Plot of Power Spectral Density (40 MHz N Mode, 5805 MHz, Chain 1)



Figure 111 Plot of Low Band Edge Compliance (20MHz CCK Mode, 2412 MHz, Chain 0)

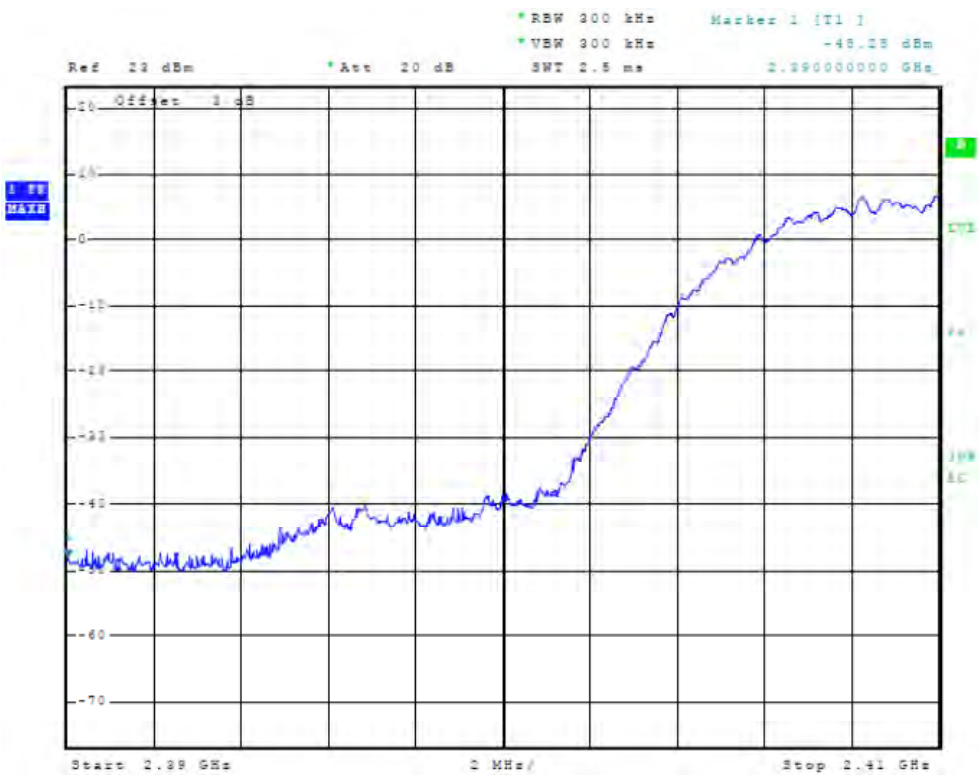


Figure 112 Plot of Low Band Edge Compliance (20MHz CCK Mode, 2412 MHz, Chain 1)

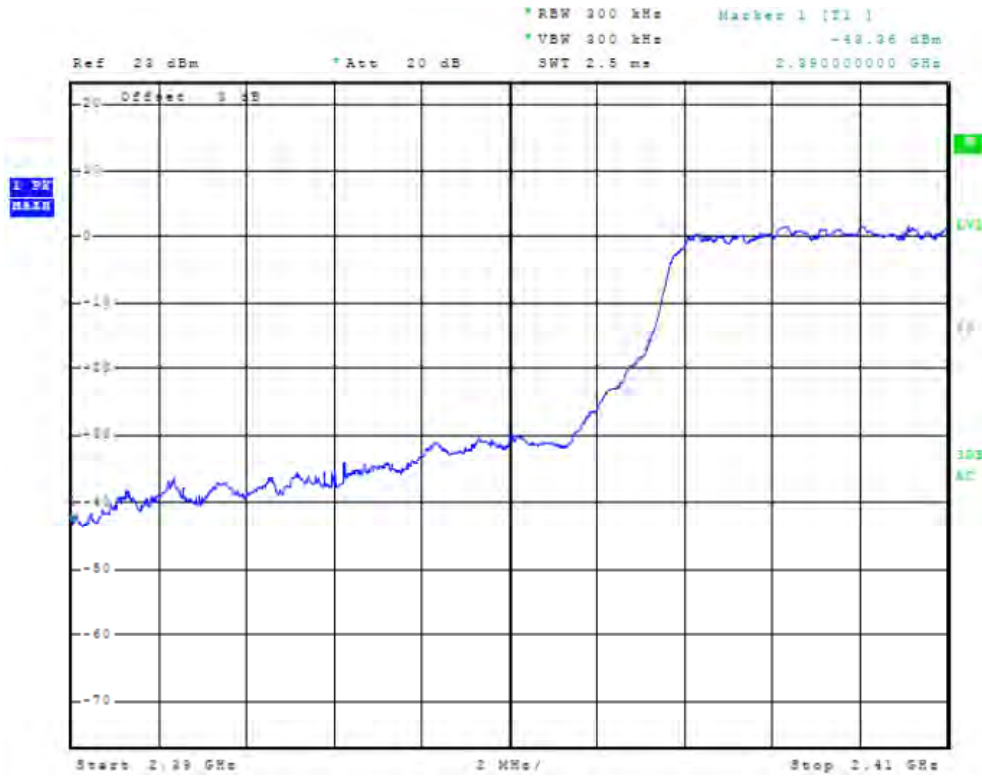


Figure 113 Plot of Low Band Edge Compliance (20MHz OFDM Mode, 2412 MHz, Chain 0)

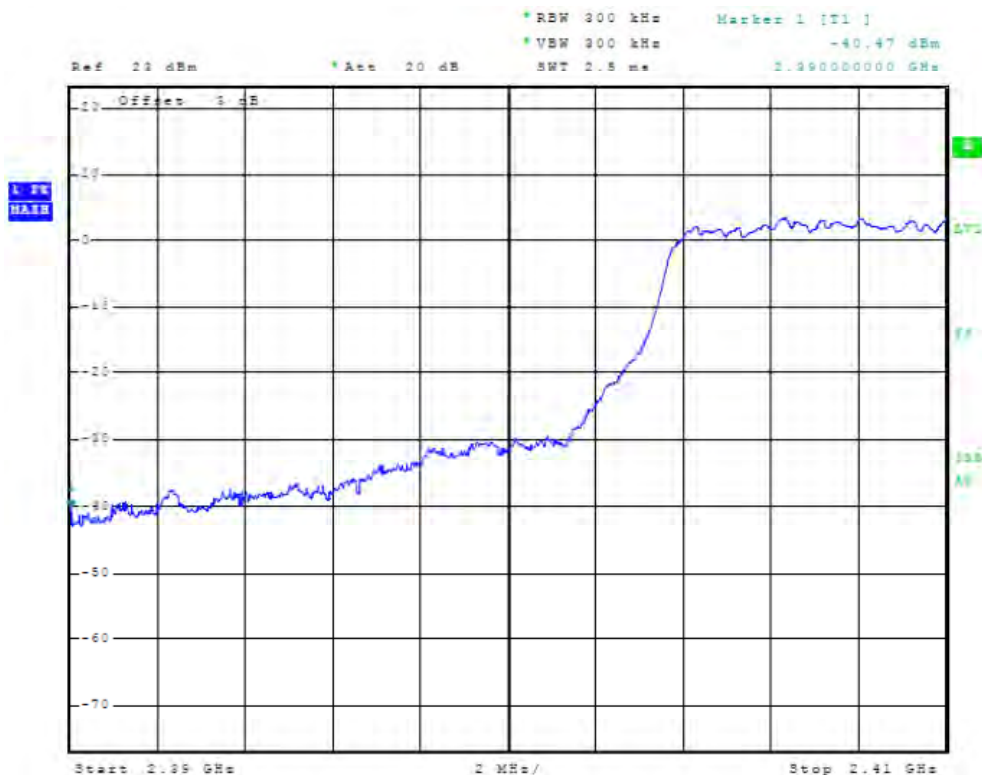


Figure 114 Plot of Low Band Edge Compliance (20MHz OFDM Mode, 2412 MHz, Chain 1)

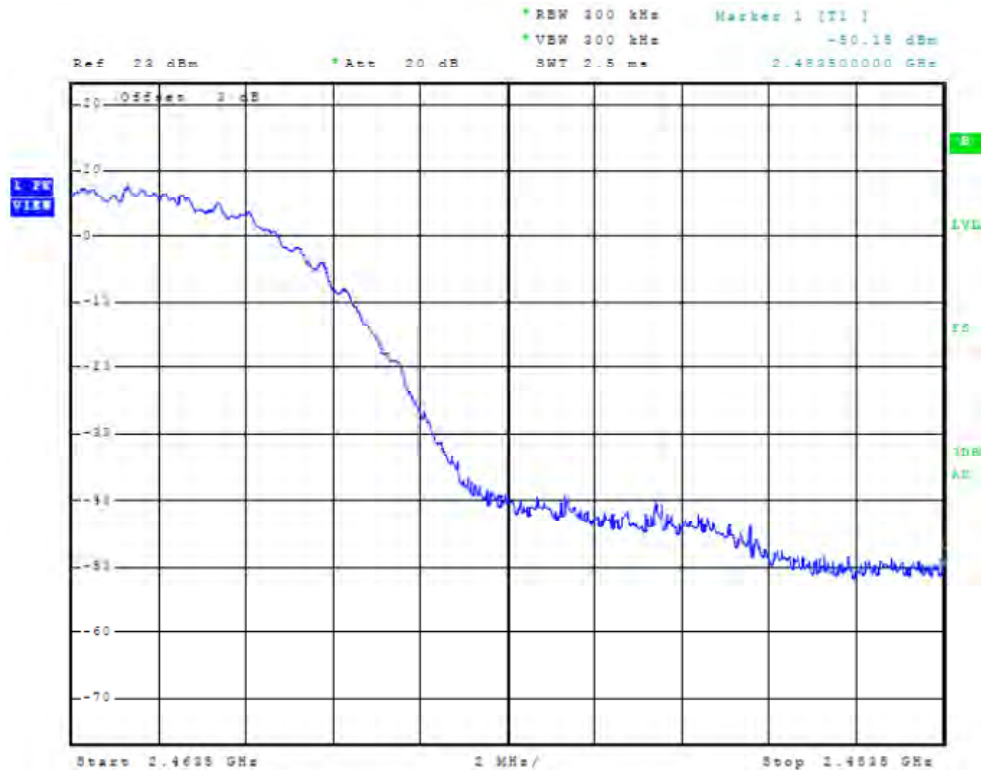


Figure 115 Plot of High Band Edge Compliance (20MHz CCK Mode, 2462 MHz, Chain 0)

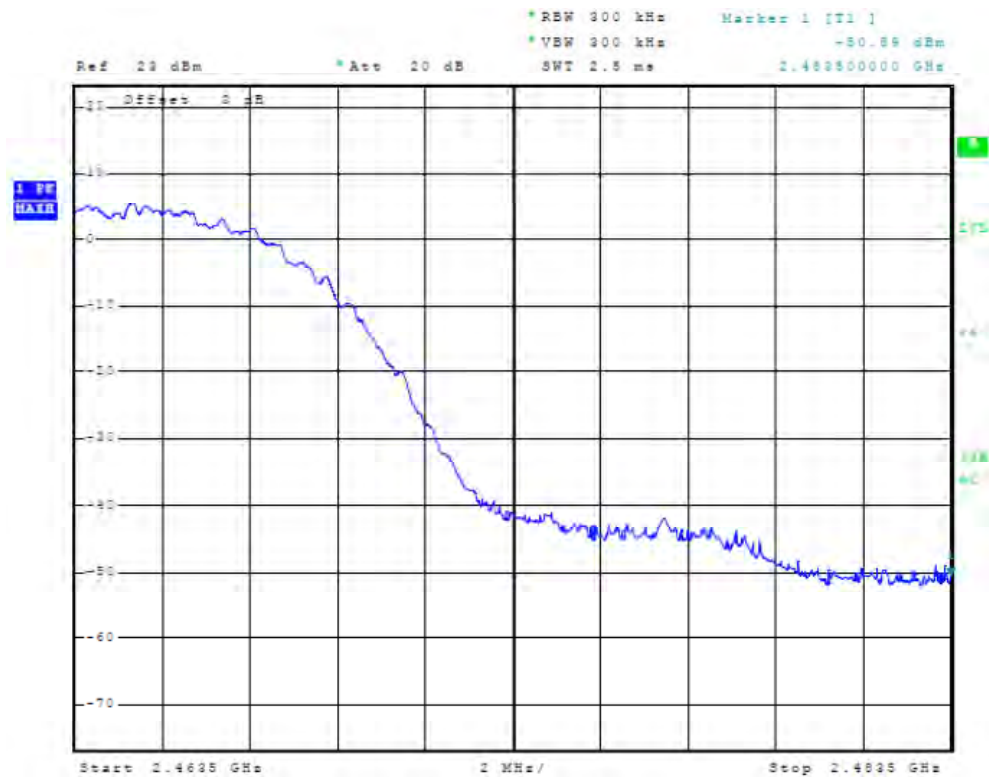


Figure 116 Plot of High Band Edge Compliance (20MHz CCK Mode, 2462 MHz, Chain 1)

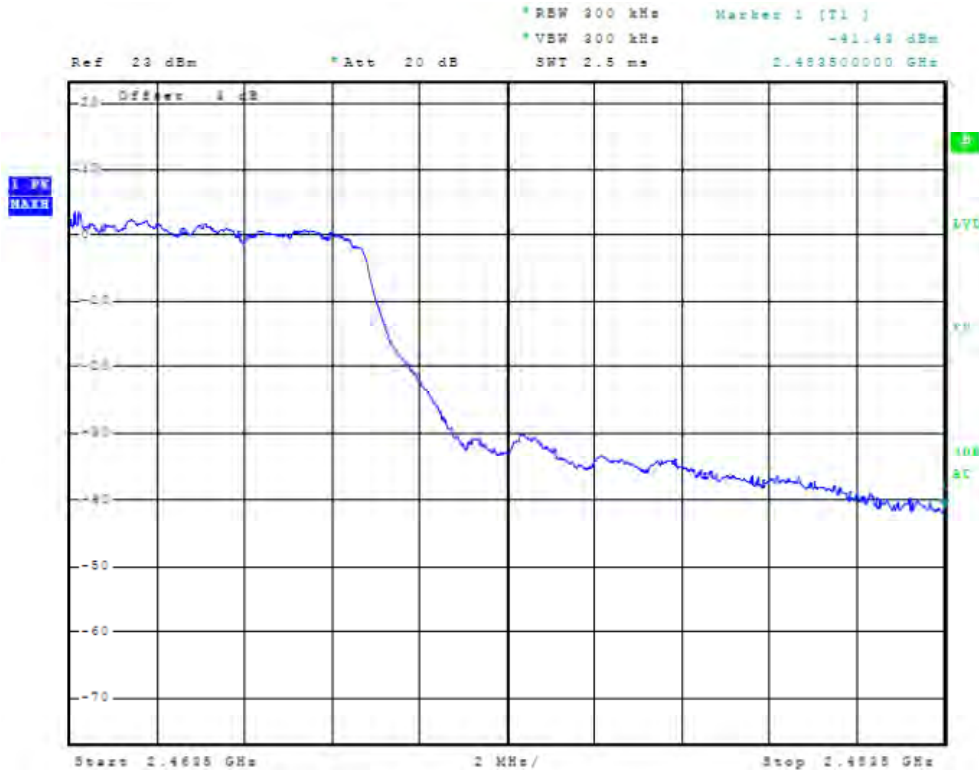


Figure 117 Plot of High Band Edge Compliance (20MHz OFDM Mode, 2462 MHz, Chain 0)

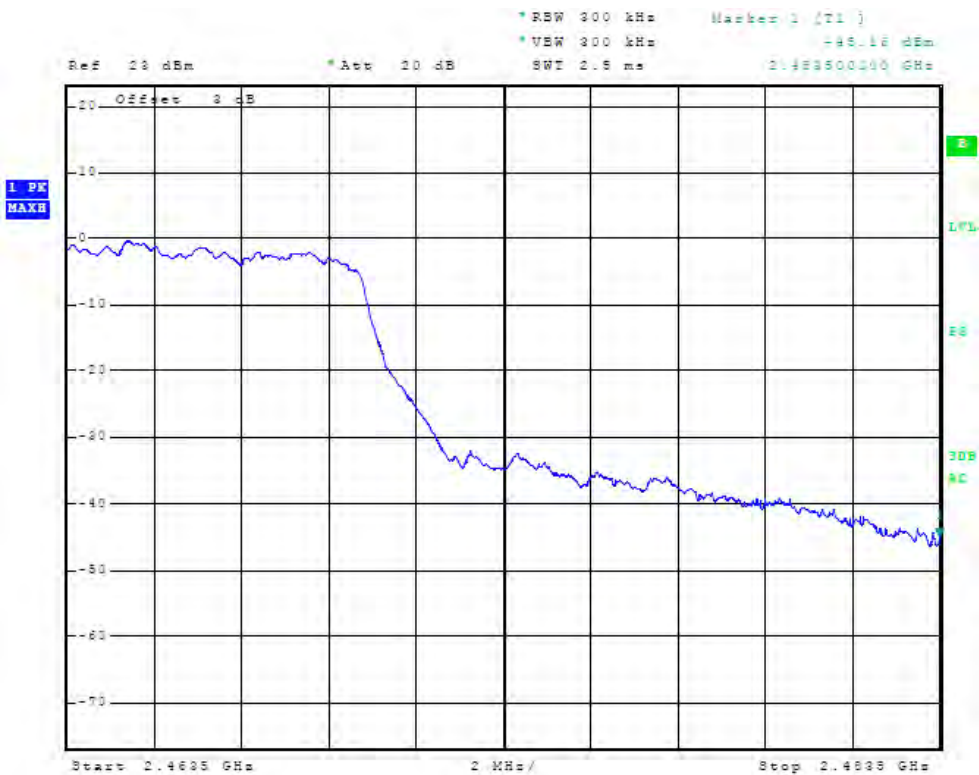


Figure 118 Plot of High Band Edge Compliance (20MHz OFDM Mode, 2462 MHz, Chain 1)

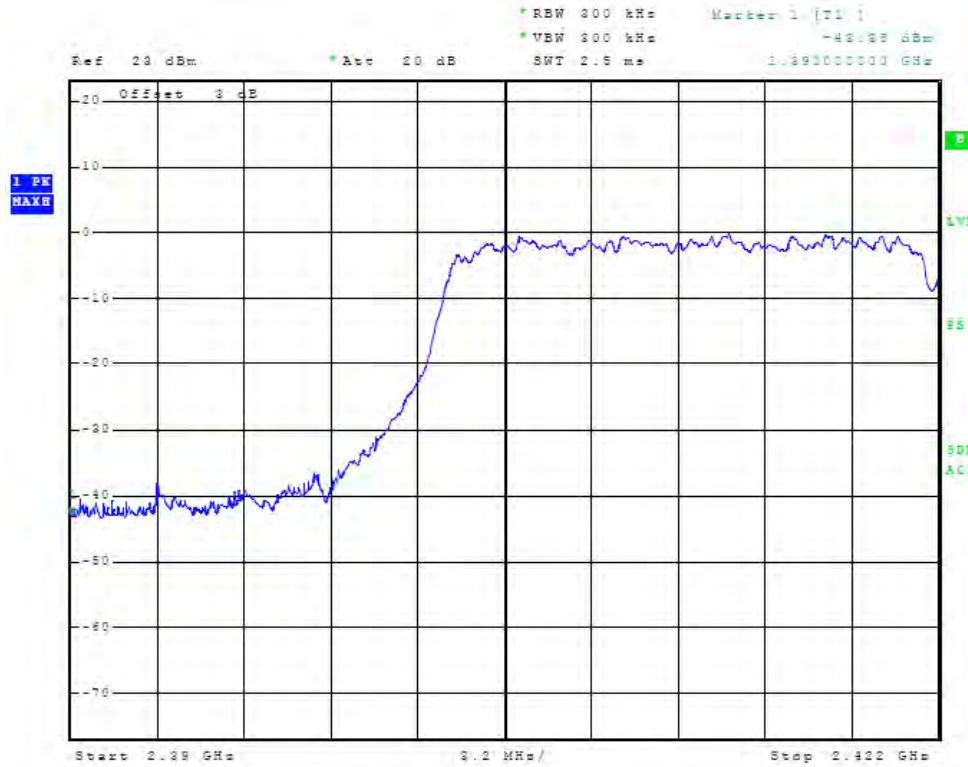


Figure 119 Plot of Low Band Edge Compliance (40MHz N Mode, 2422 MHz, Chain 0)



Figure 120 Plot of Low Band Edge Compliance (40MHz N Mode, 2422 MHz, Chain 1)

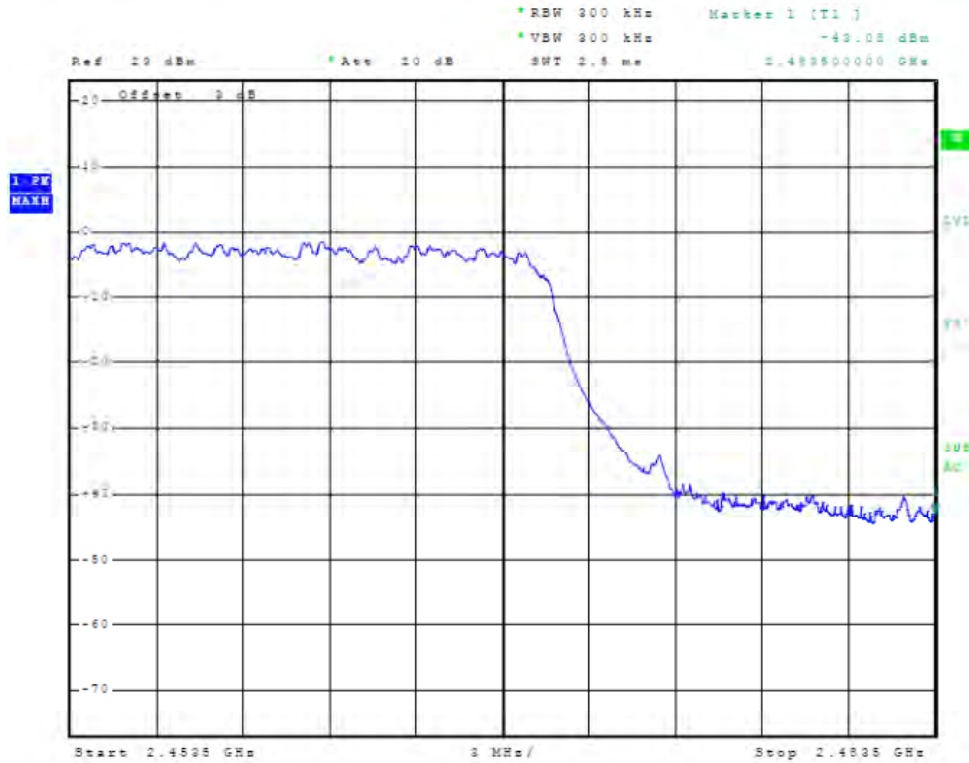


Figure 121 Plot of High Band Edge Compliance (40MHz N Mode, 2452 MHz, Chain 0)

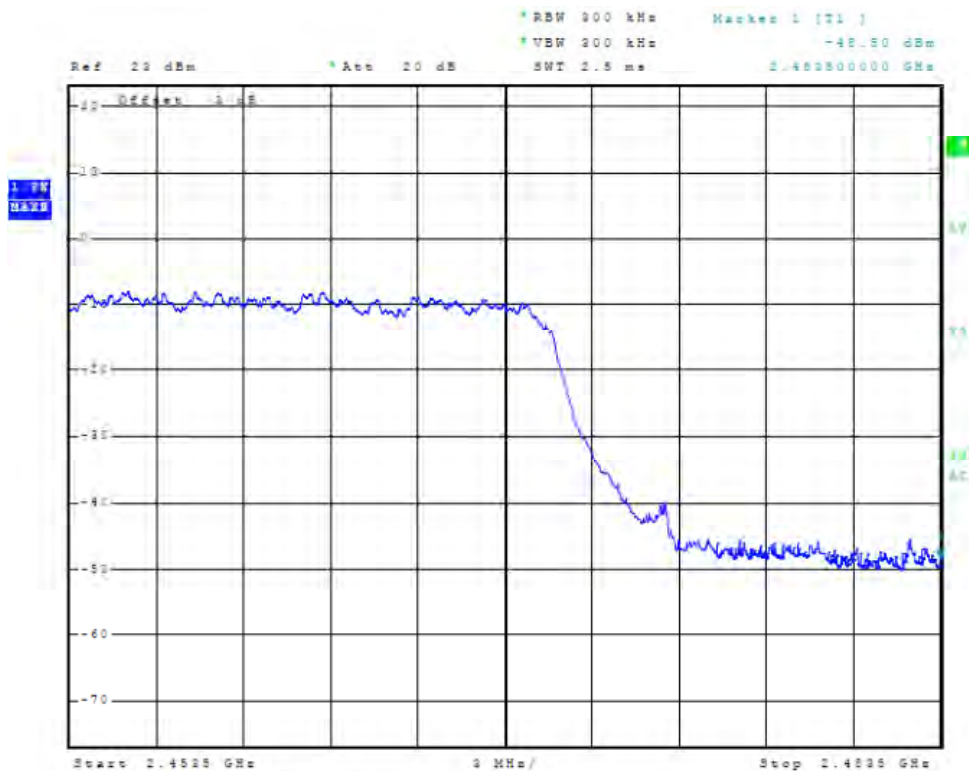


Figure 122 Plot of High Band Edge Compliance (40MHz N Mode, 2452 MHz, Chain 1)

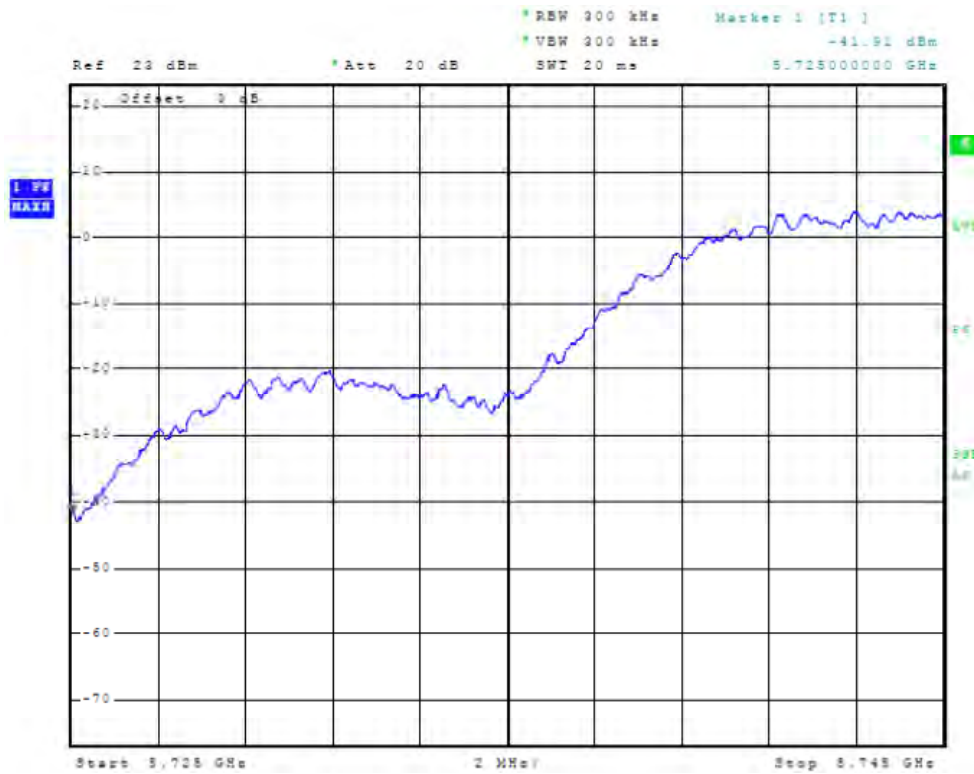


Figure 123 Plot of Low Band Edge Compliance (20MHz CCK Mode, 5745 MHz, Chain 0)

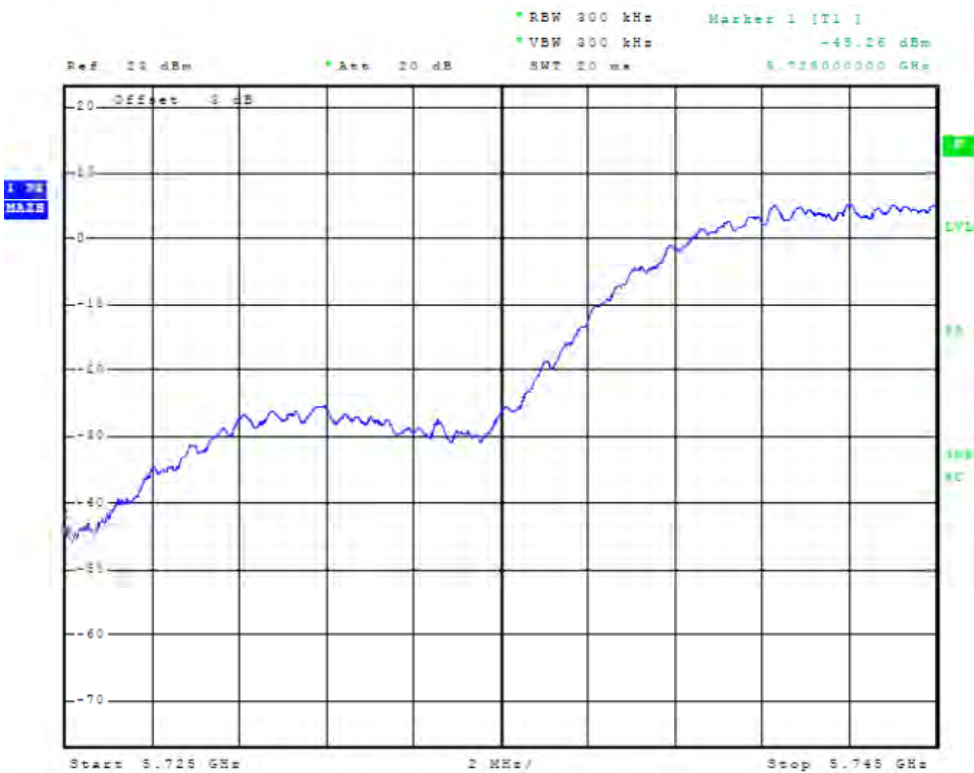


Figure 124 Plot of Low Band Edge Compliance (20MHz CCK Mode, 5745 MHz, Chain 1)

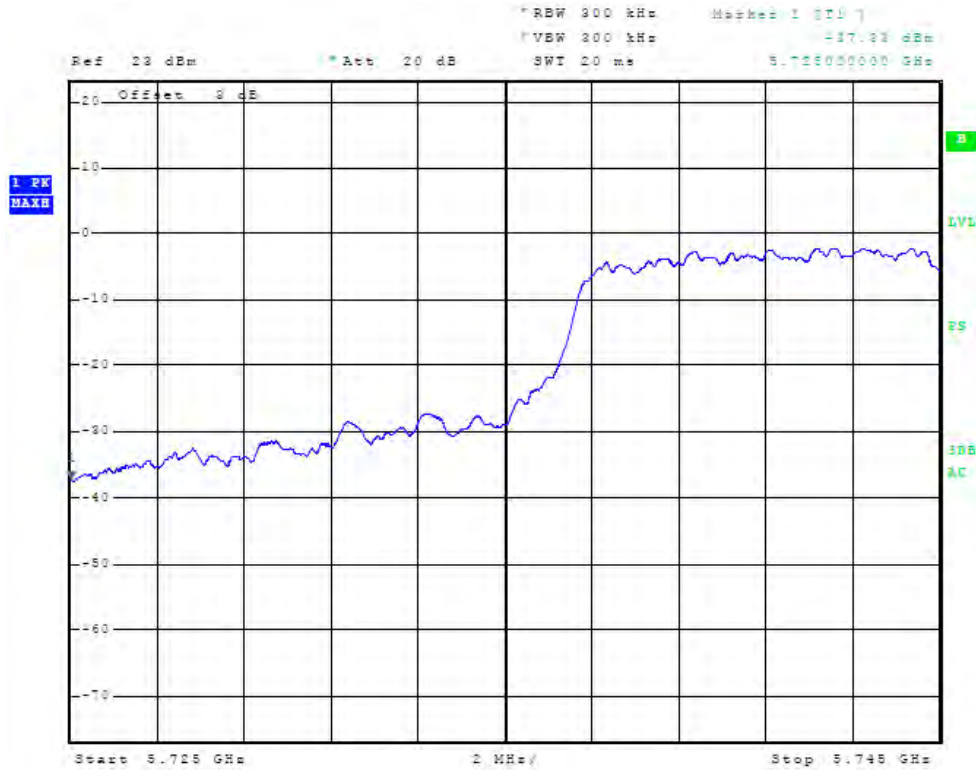


Figure 125 Plot of Low Band Edge Compliance (20MHz OFDM Mode, 5745 MHz, Chain 0)

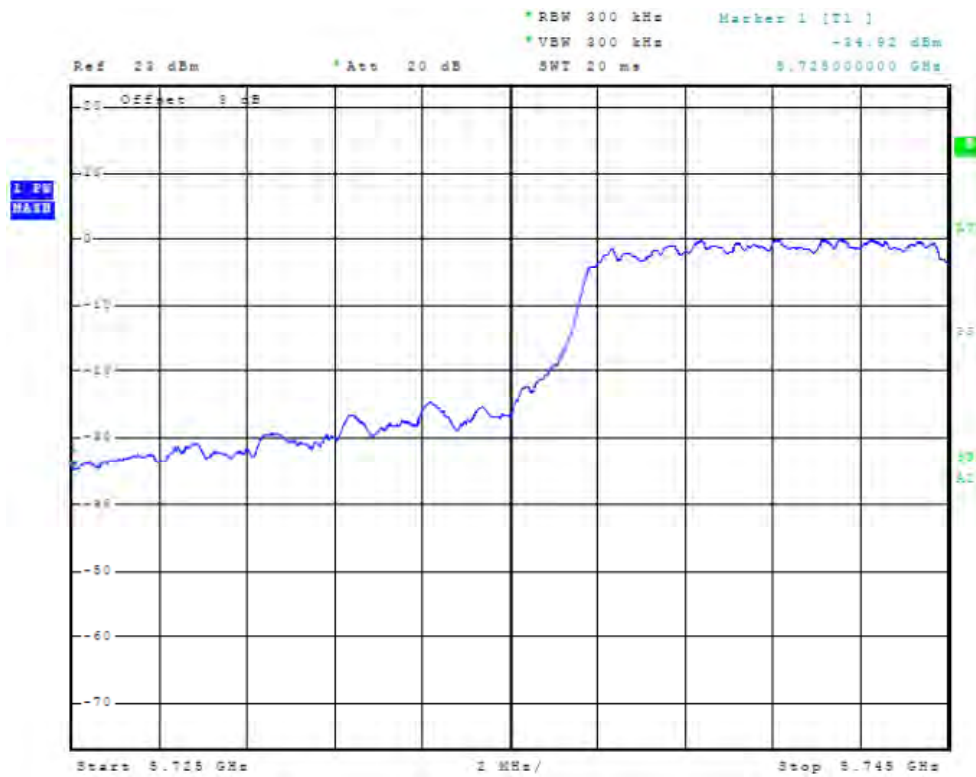


Figure 126 Plot of Low Band Edge Compliance (20MHz OFDM Mode, 5745 MHz, Chain 1)

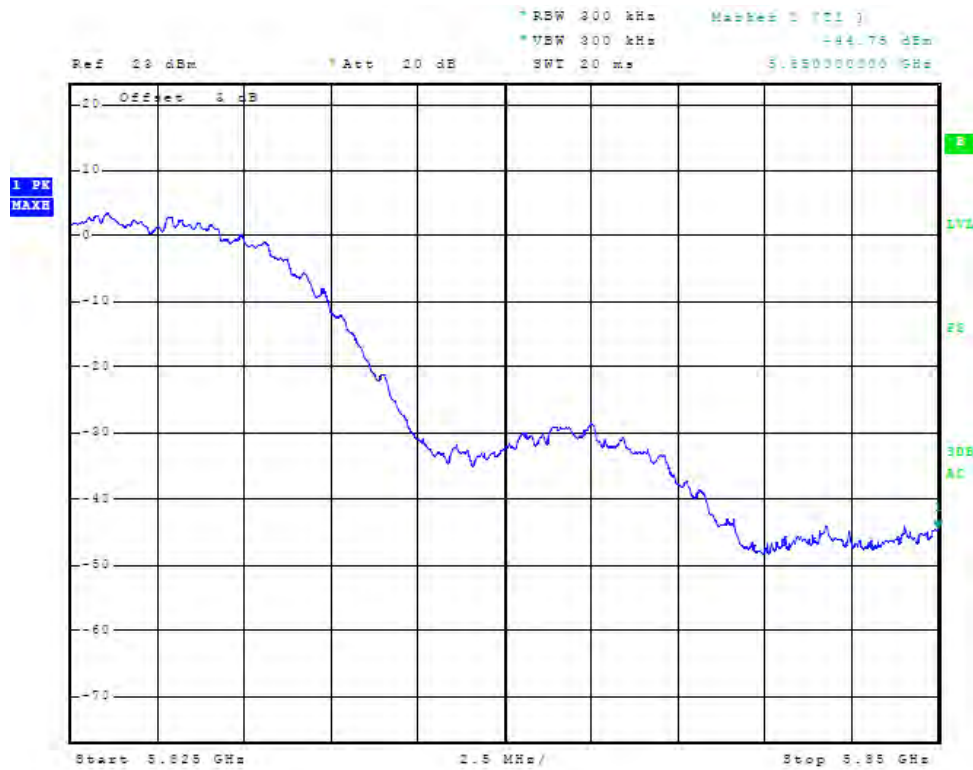


Figure 127 Plot of High Band Edge Compliance (20MHz CCK Mode, 5825 MHz, Chain 0)

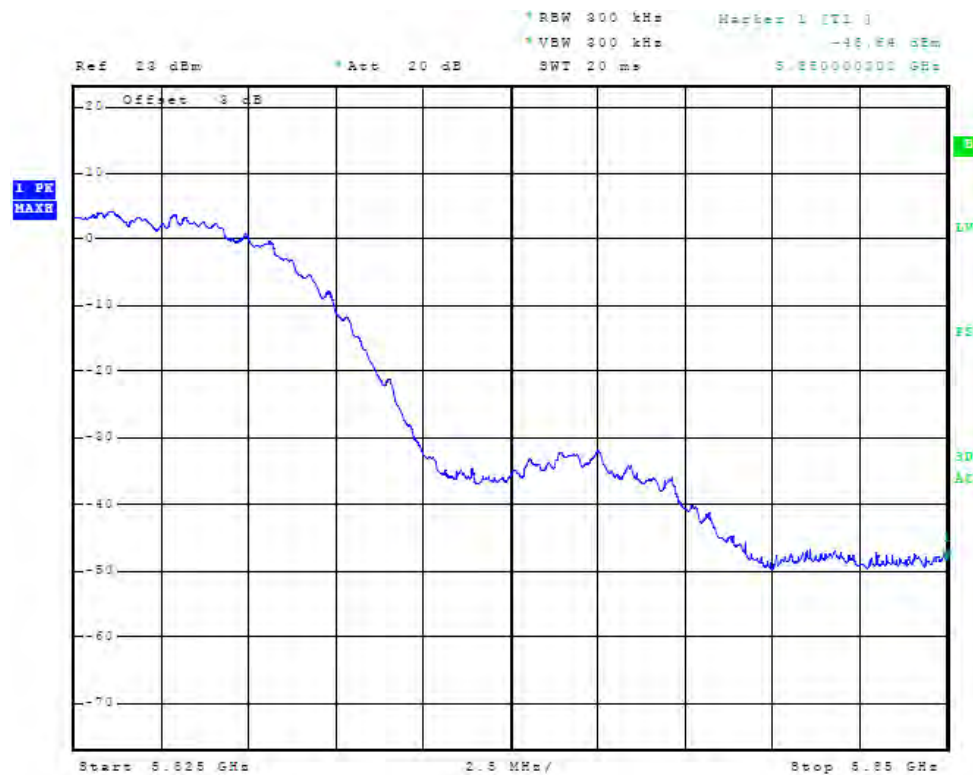


Figure 128 Plot of High Band Edge Compliance (20MHz CCK Mode, 5825 MHz, Chain 1)

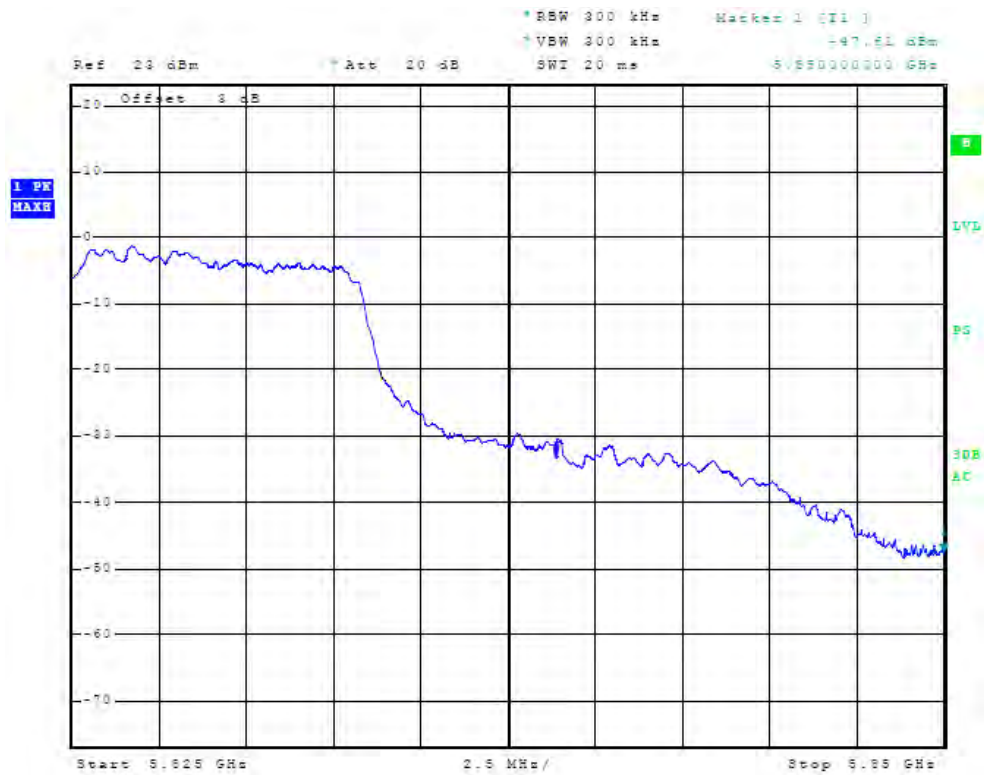


Figure 129 Plot of High Band Edge Compliance (20MHz OFDM Mode, 5825 MHz, Chain 0)

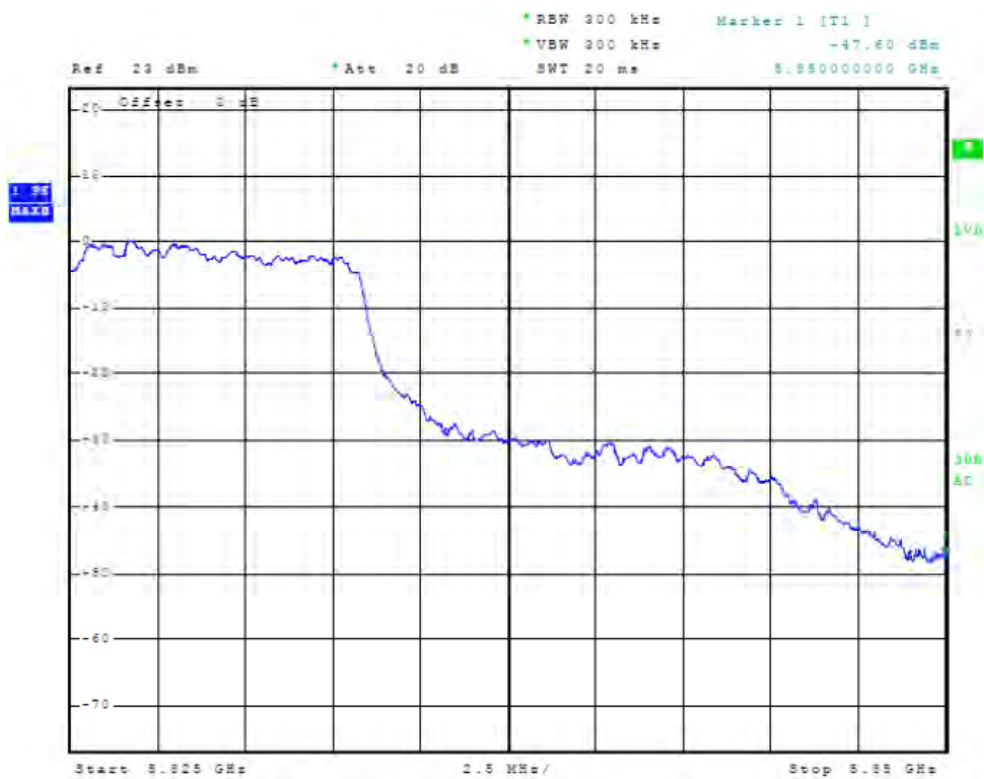


Figure 130 Plot of High Band Edge Compliance (20MHz OFDM Mode, 5825 MHz, Chain 1)

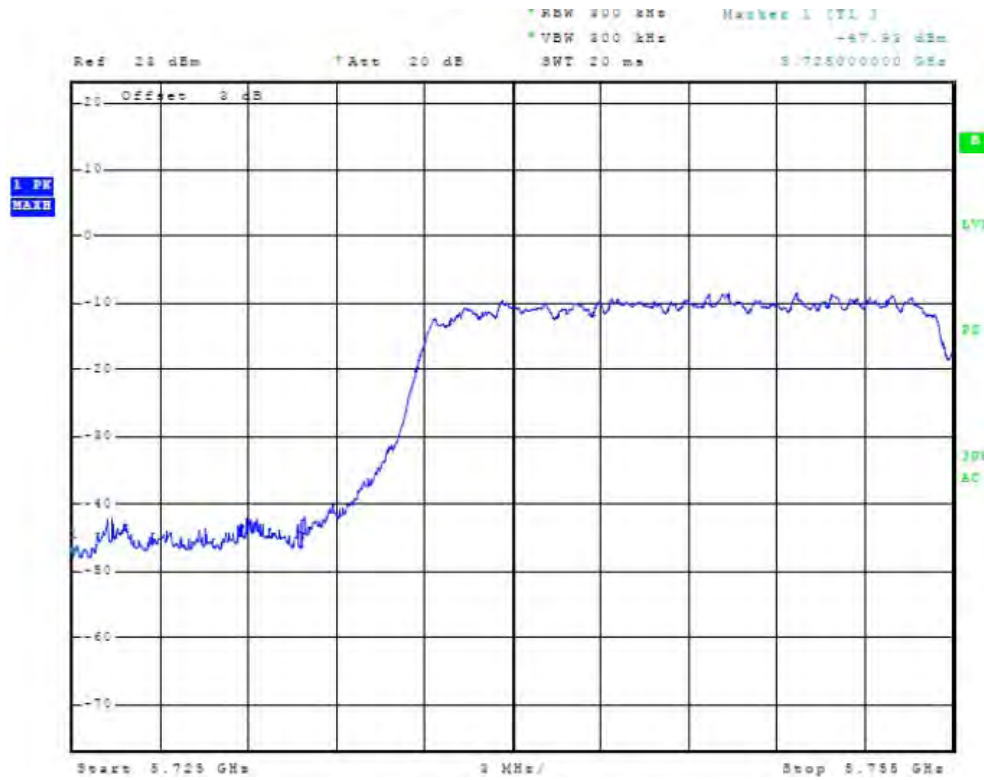


Figure 131 Plot of Low Band Edge Compliance (40MHz N Mode, 5755 MHz, Chain 0)

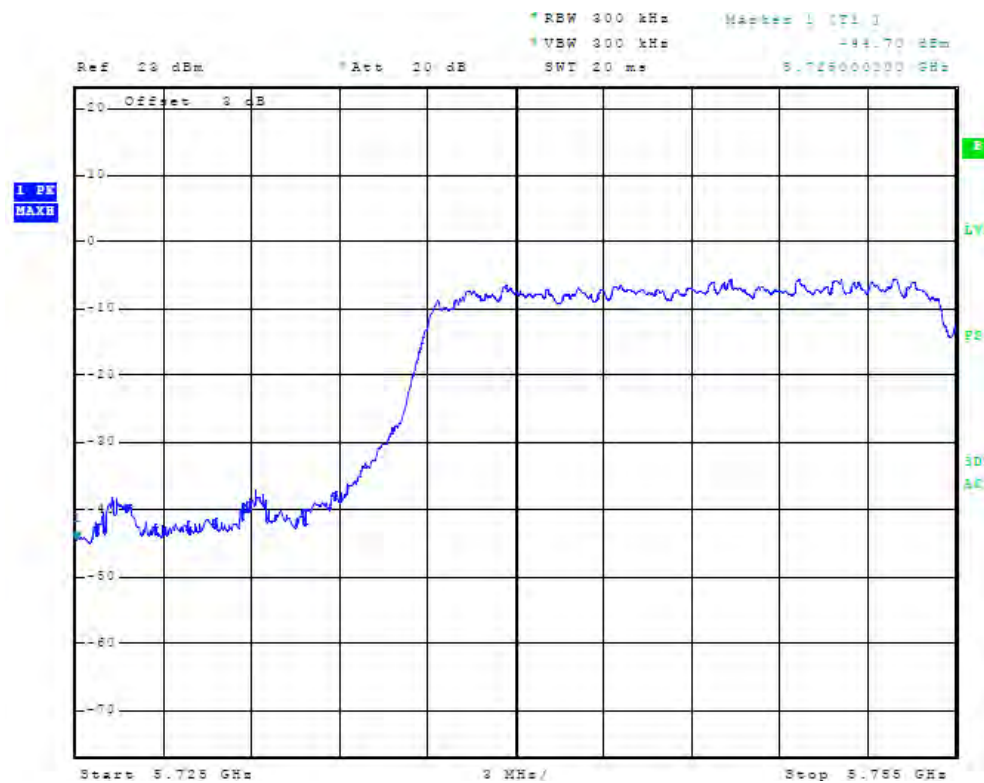


Figure 132 Plot of Low Band Edge Compliance (40MHz N Mode, 5755 MHz, Chain 1)

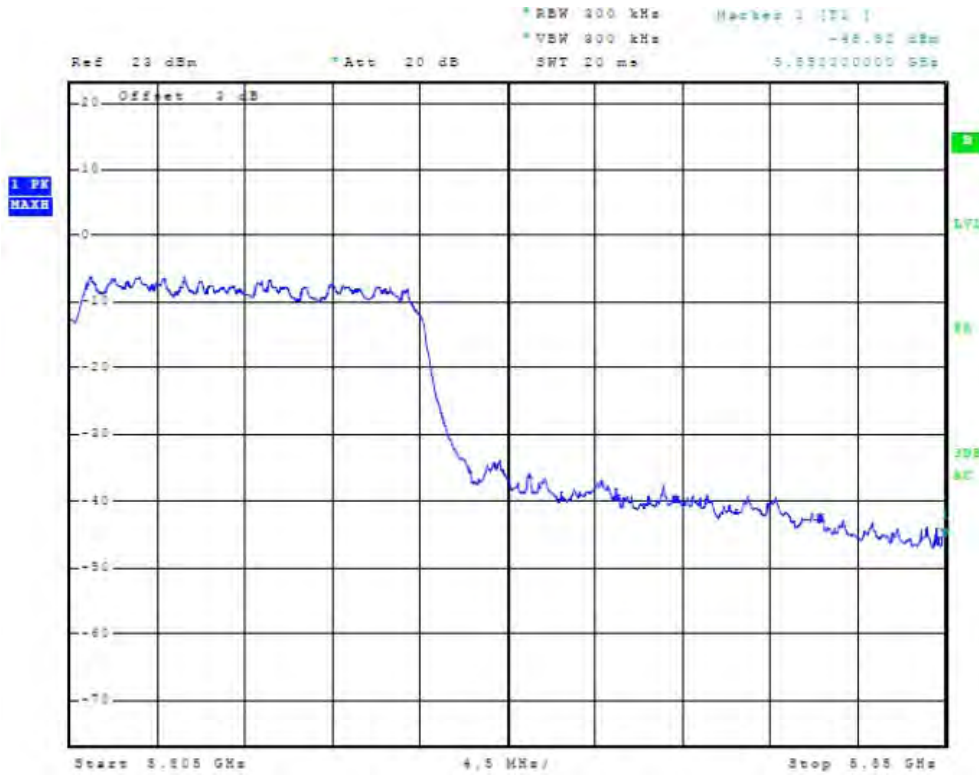


Figure 133 Plot of High Band Edge Compliance (40MHz N Mode, 5805 MHz, Chain 0)

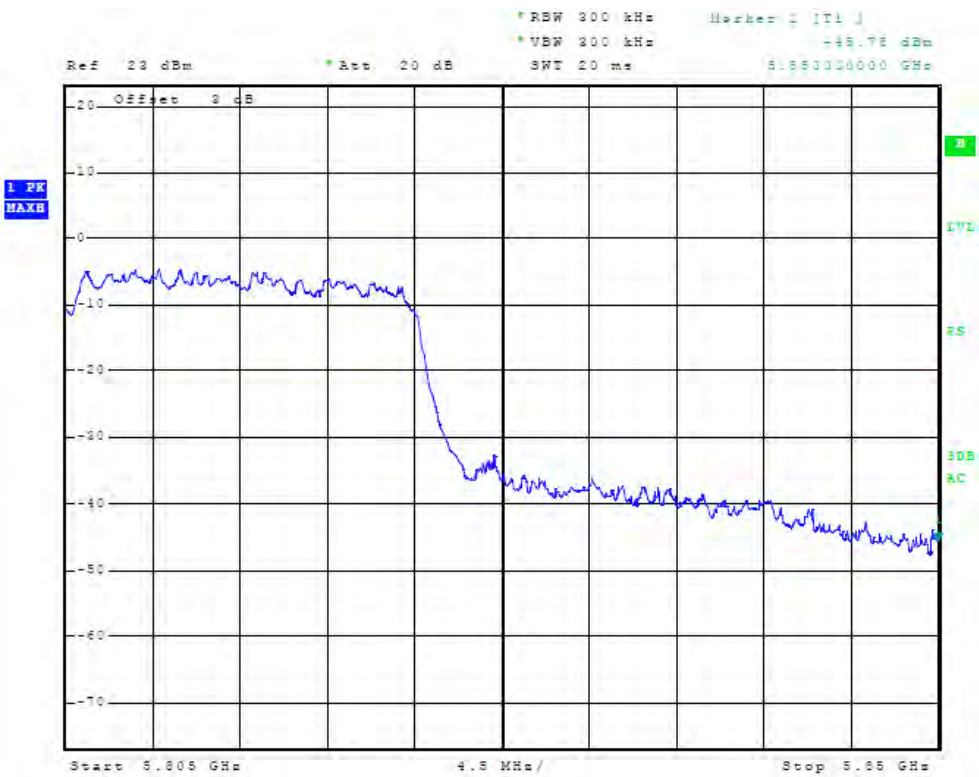


Figure 134 Plot of High Band Edge Compliance (40MHz N Mode, 5805 MHz, Chain 1)

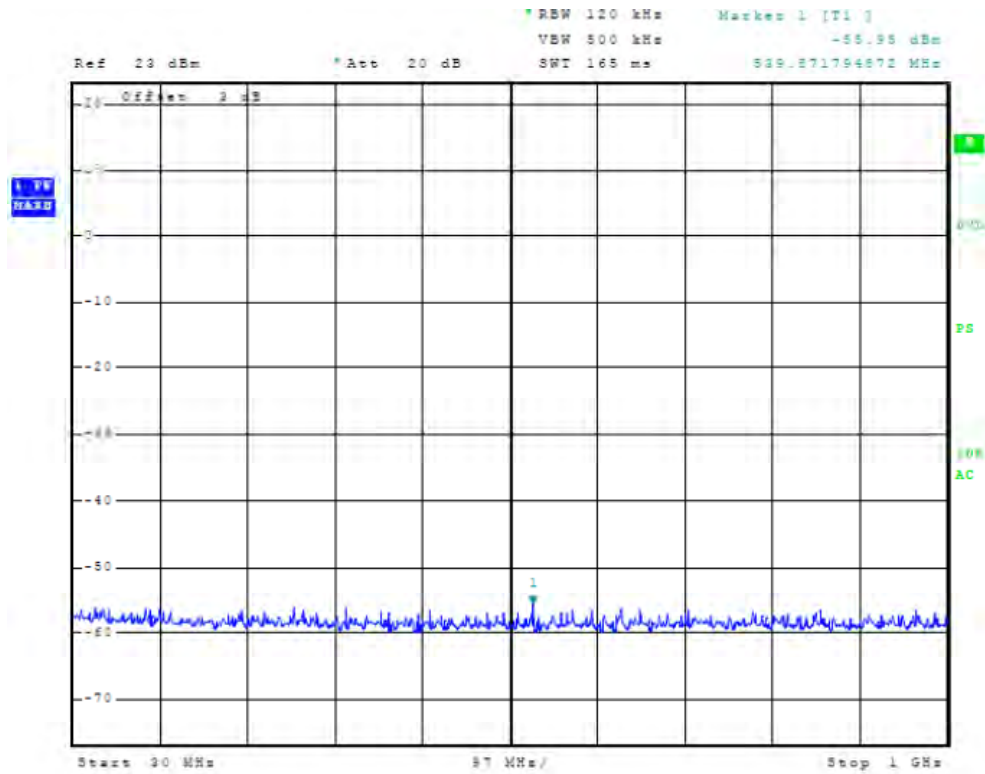


Figure 135 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0)

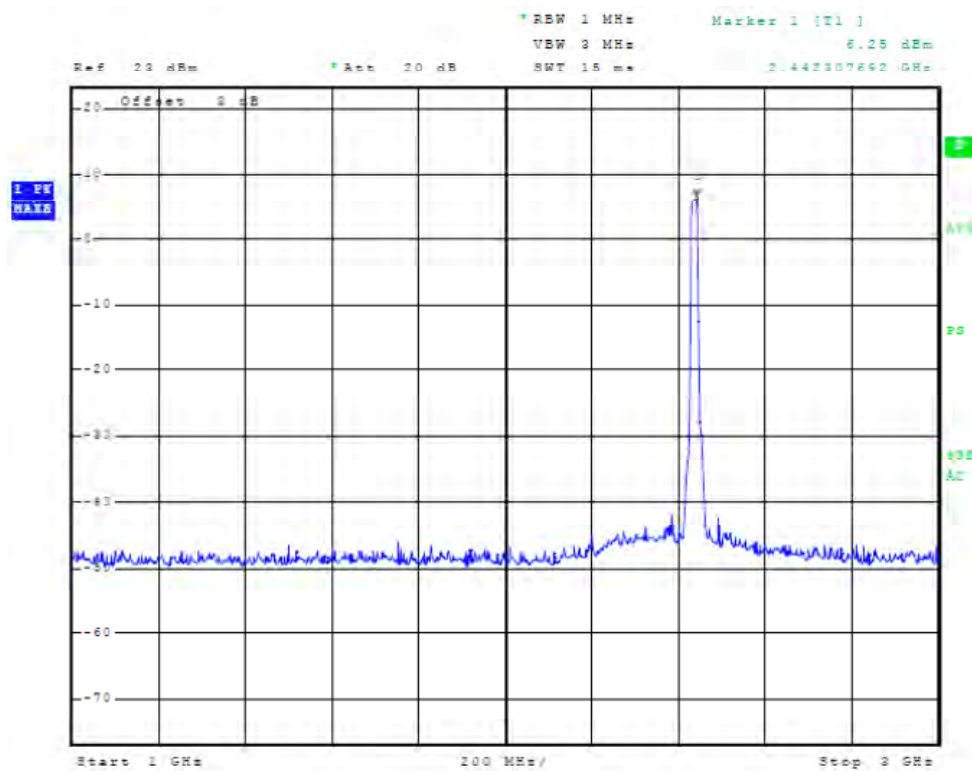


Figure 136 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0)

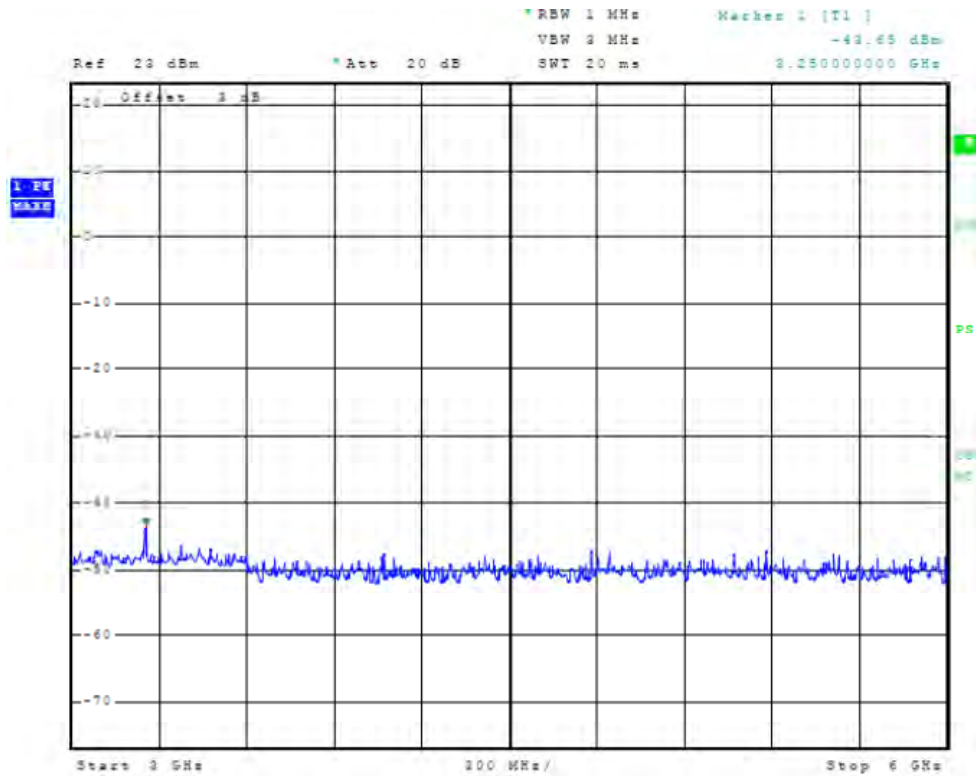


Figure 137 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0)

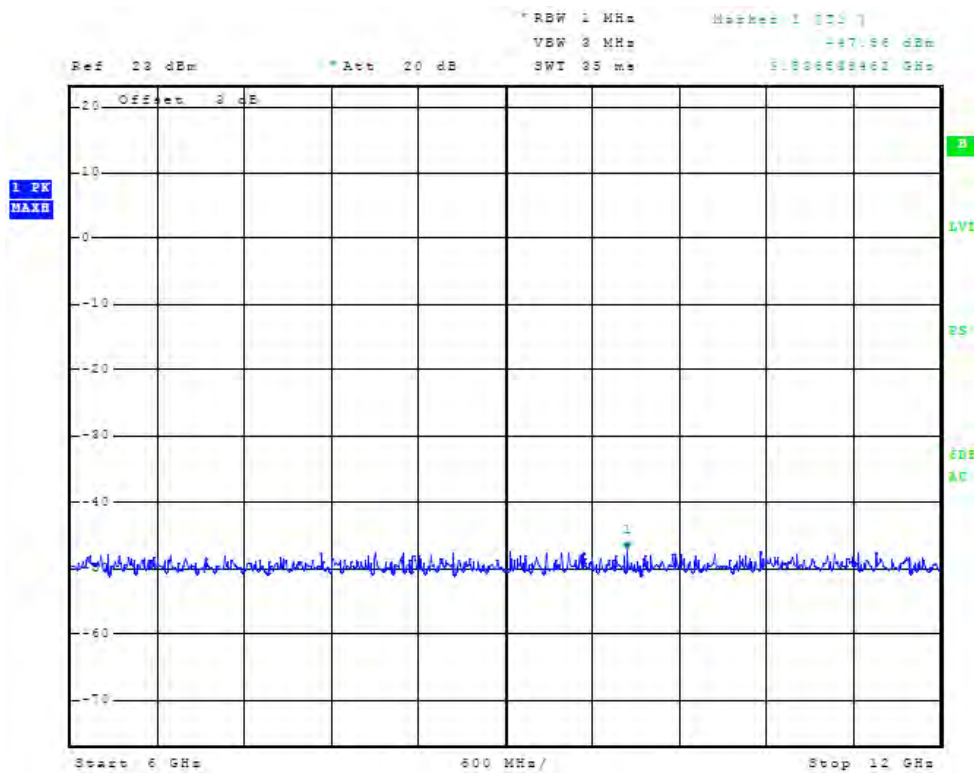


Figure 138 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0)

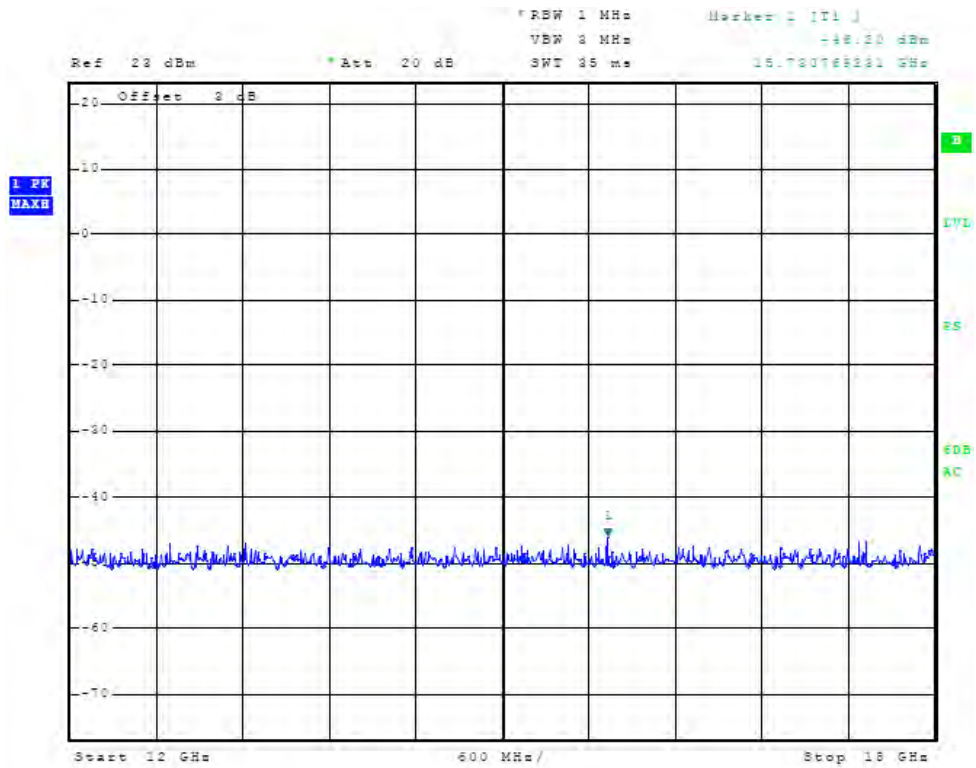


Figure 139 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0)

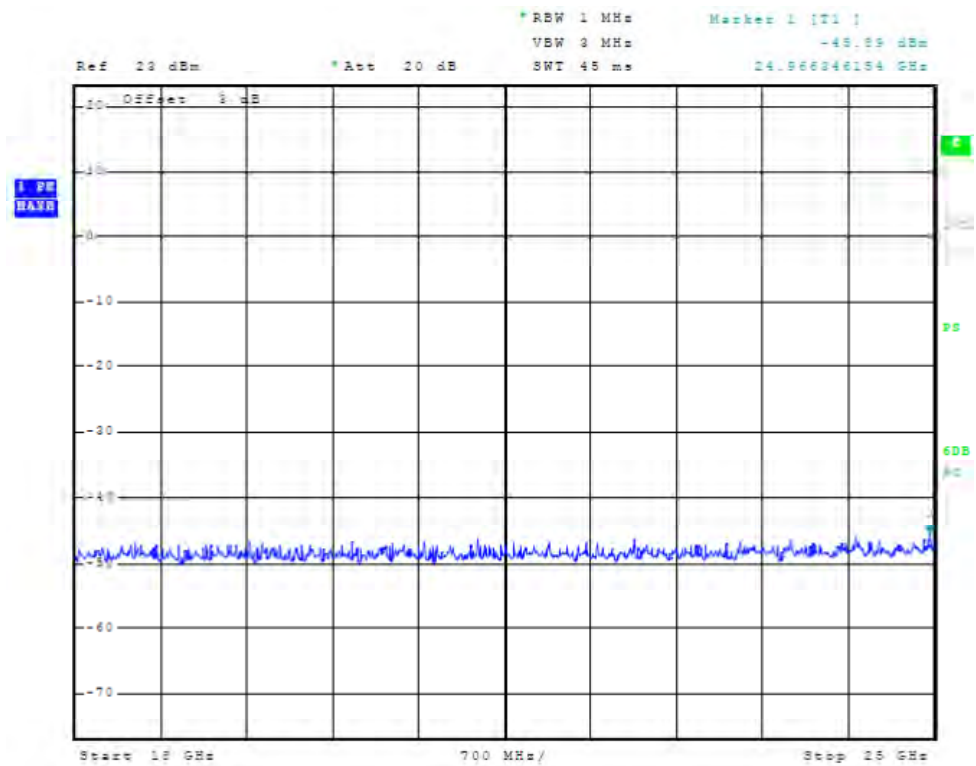


Figure 140 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 0)

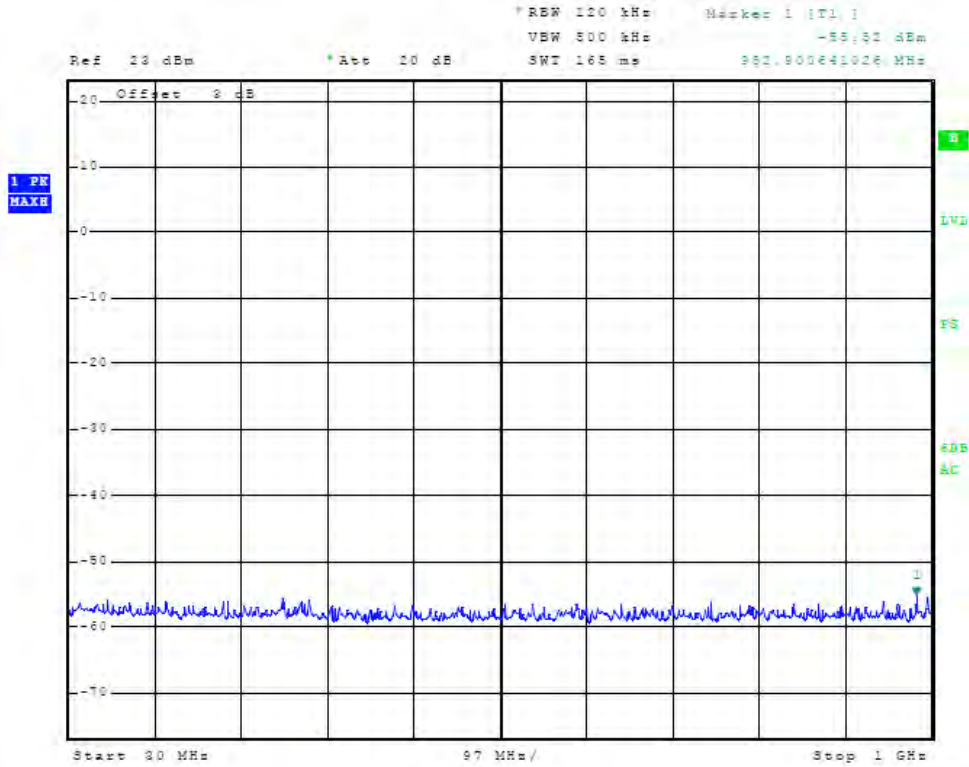


Figure 141 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1)

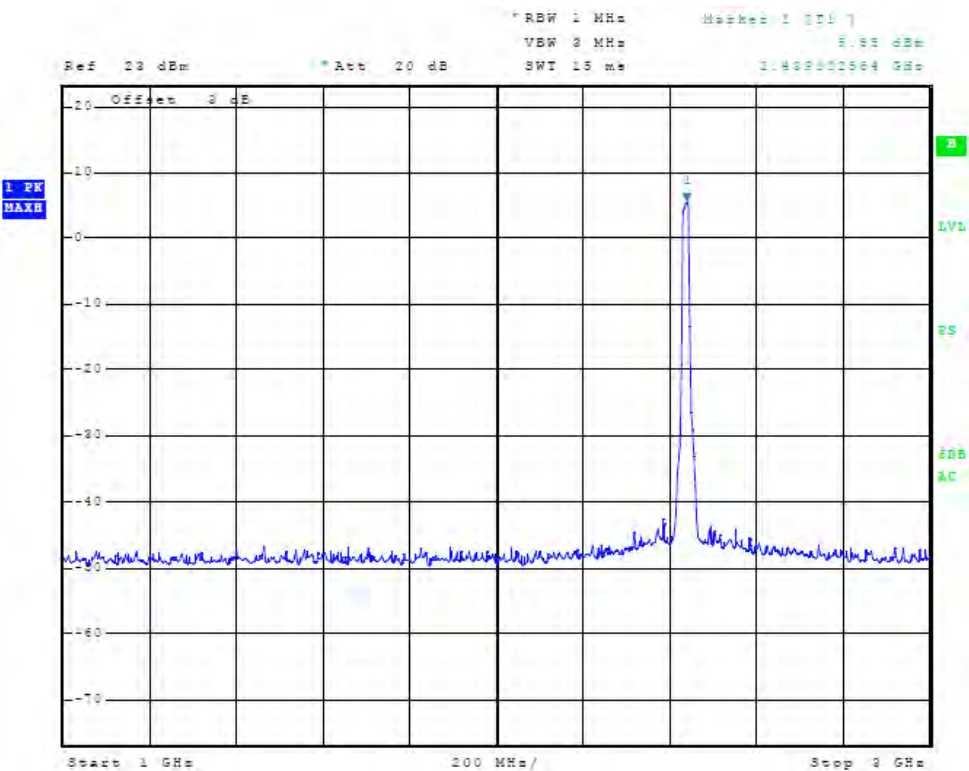


Figure 142 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1)

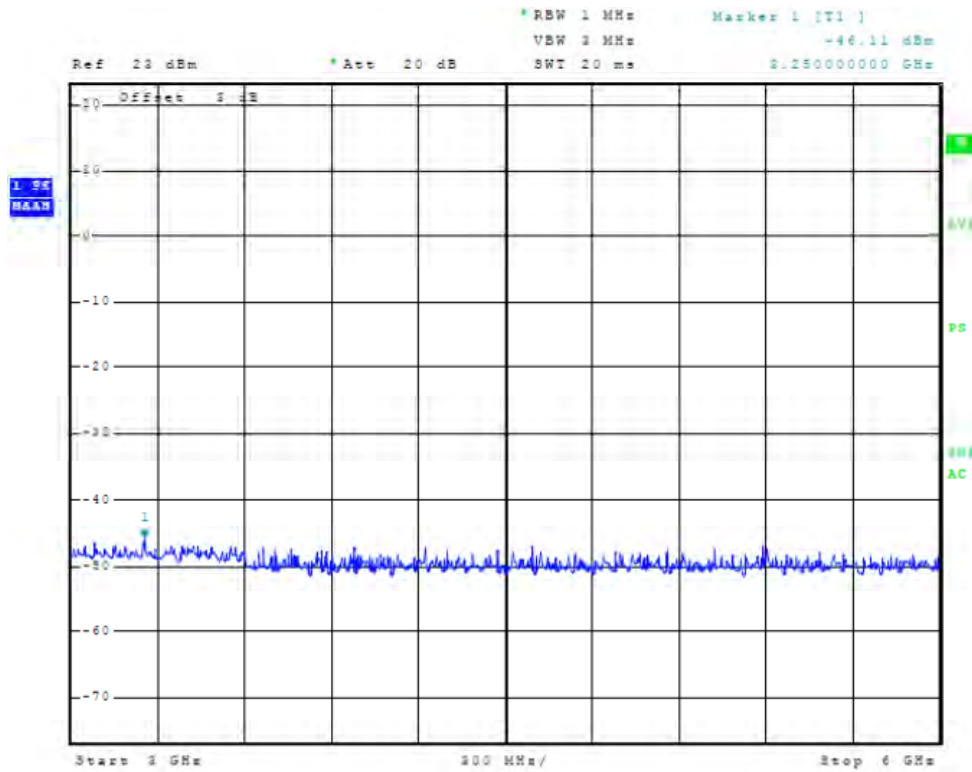


Figure 143 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1)

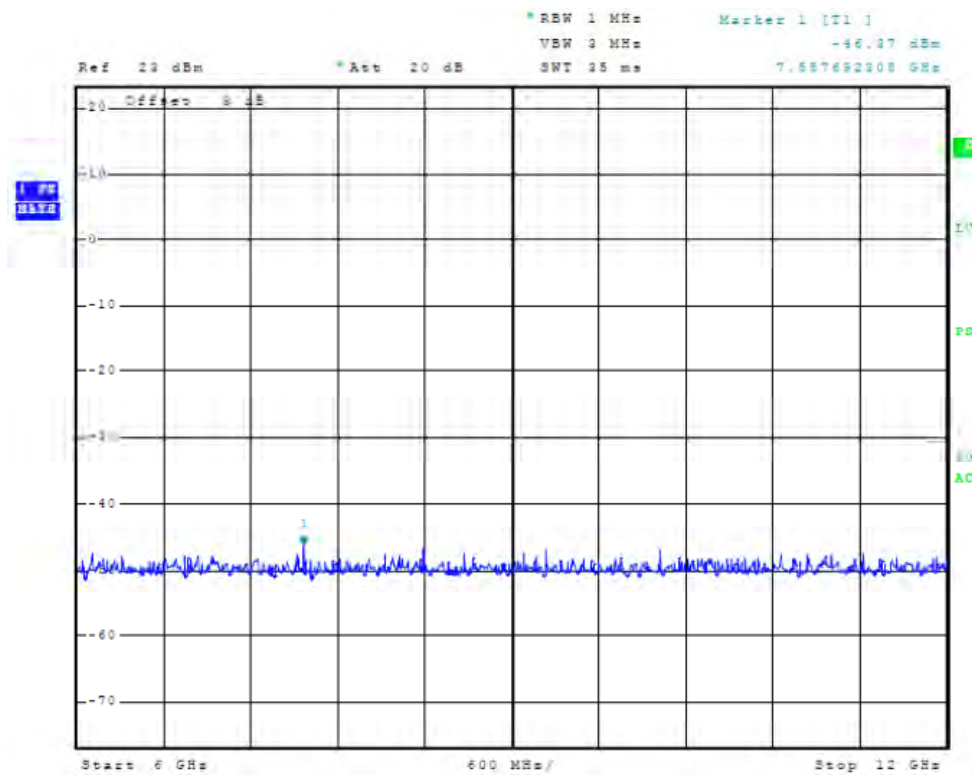


Figure 144 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1)

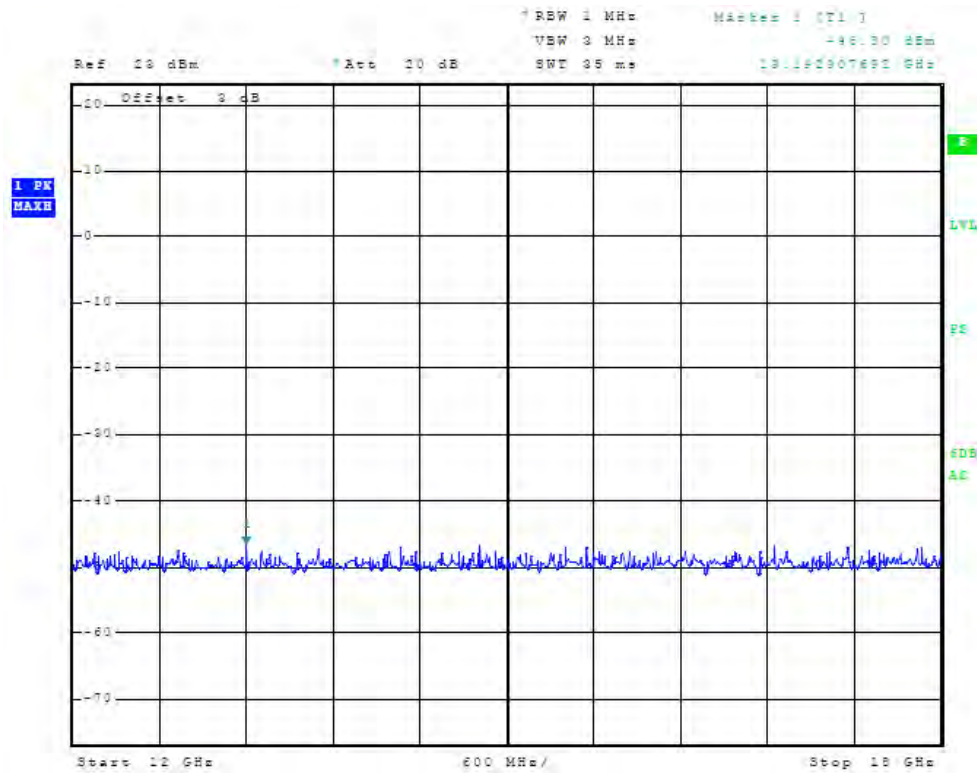


Figure 145 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1)

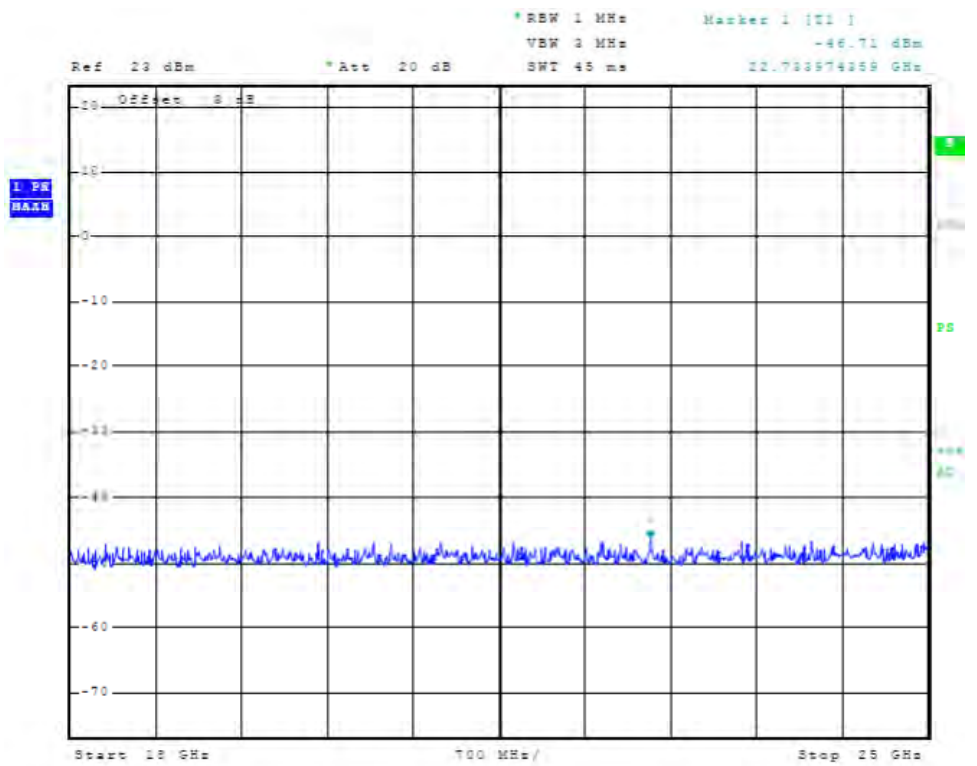


Figure 146 Plot of Antenna Port Conducted Emissions (2437 MHz Mode, Chain 1)

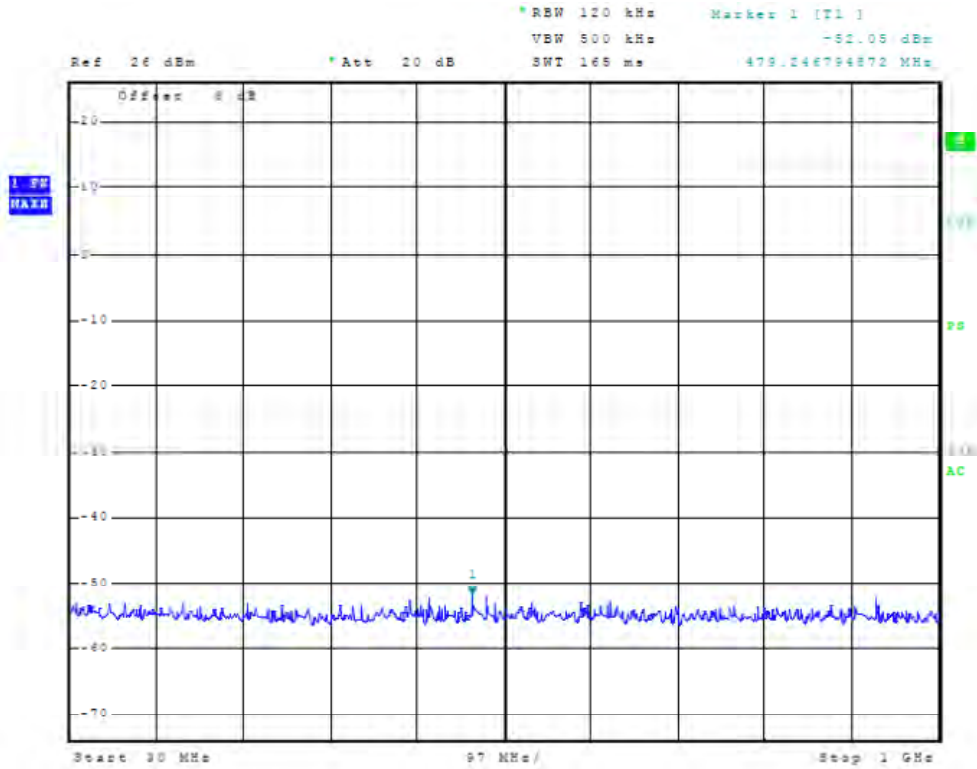


Figure 147 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0)

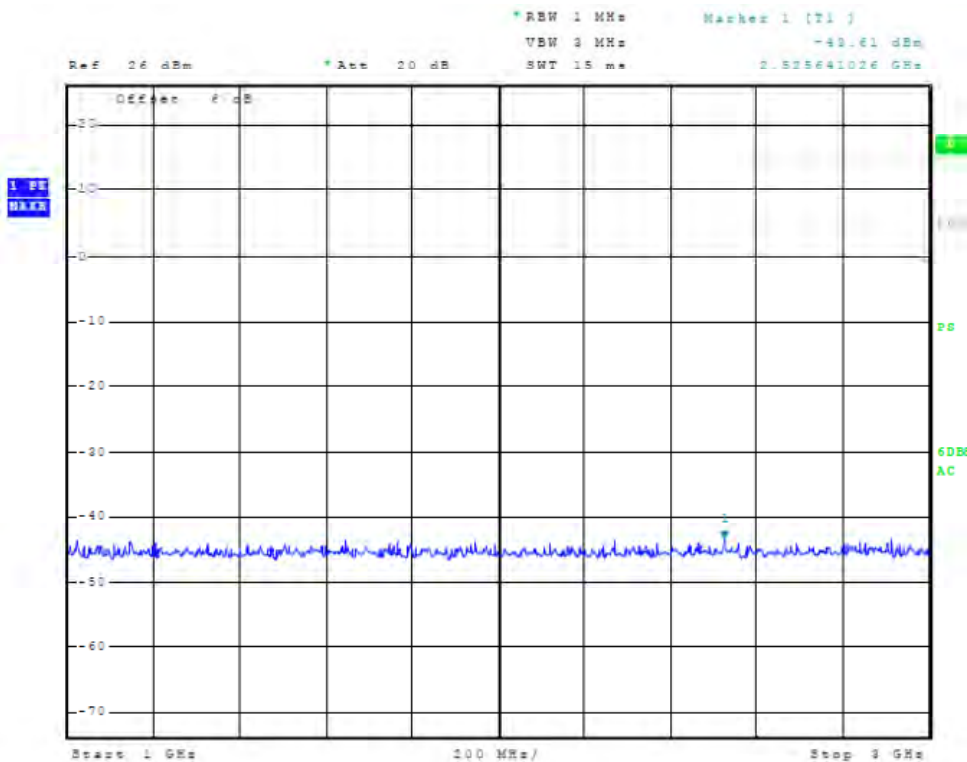


Figure 148 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0)

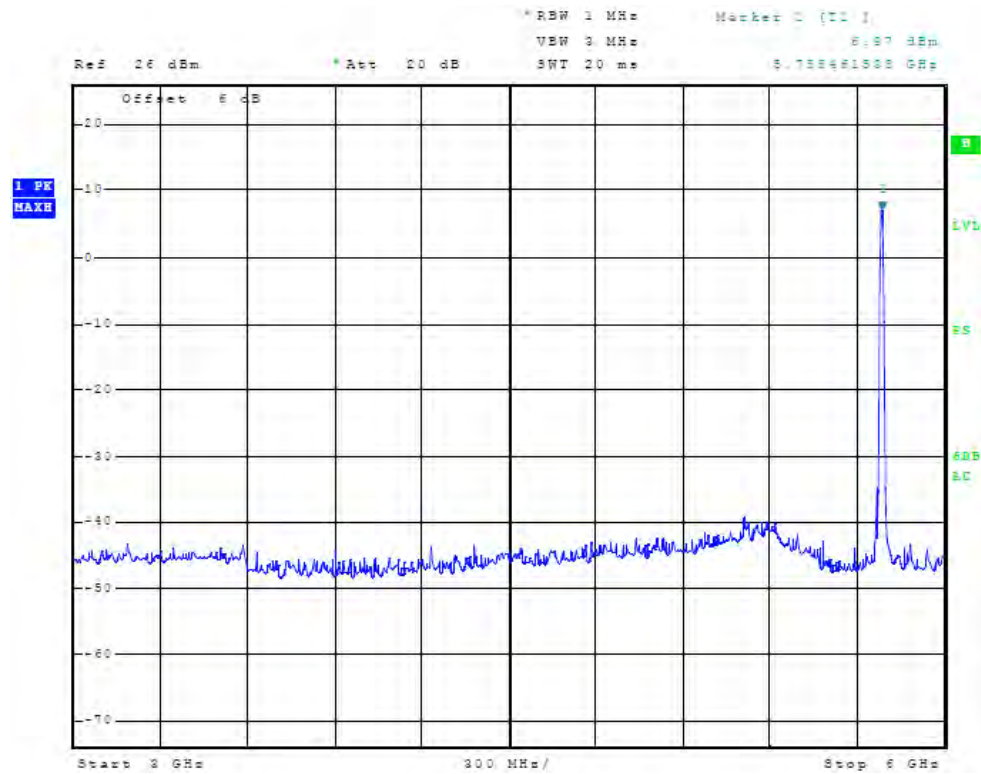


Figure 149 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0)

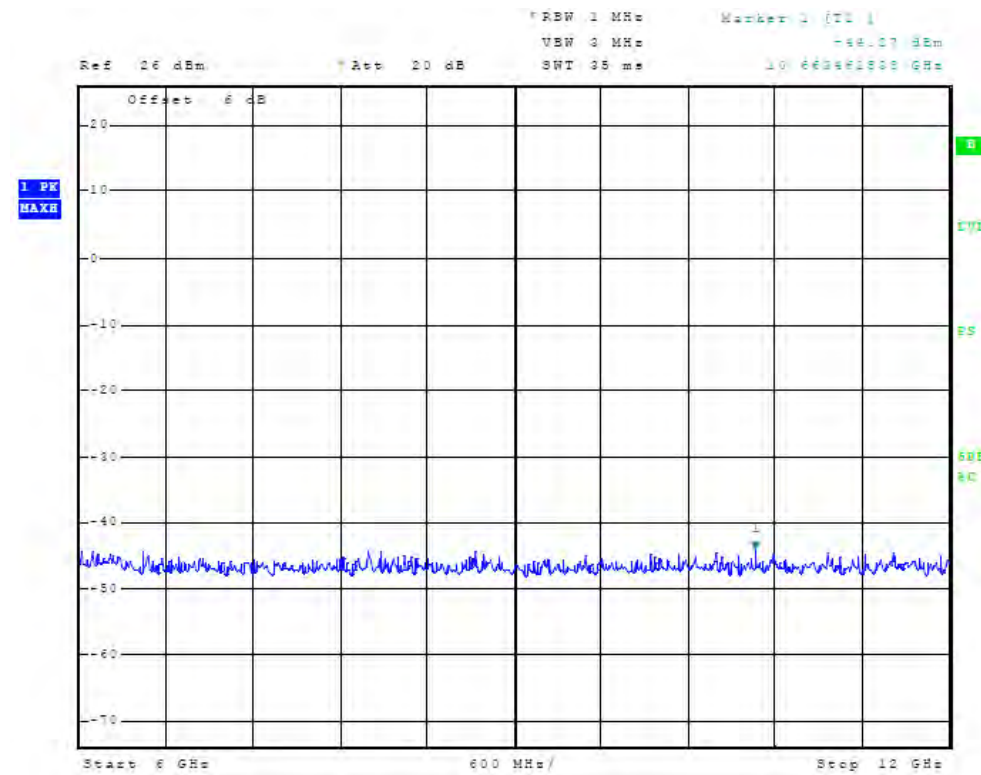


Figure 150 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0)

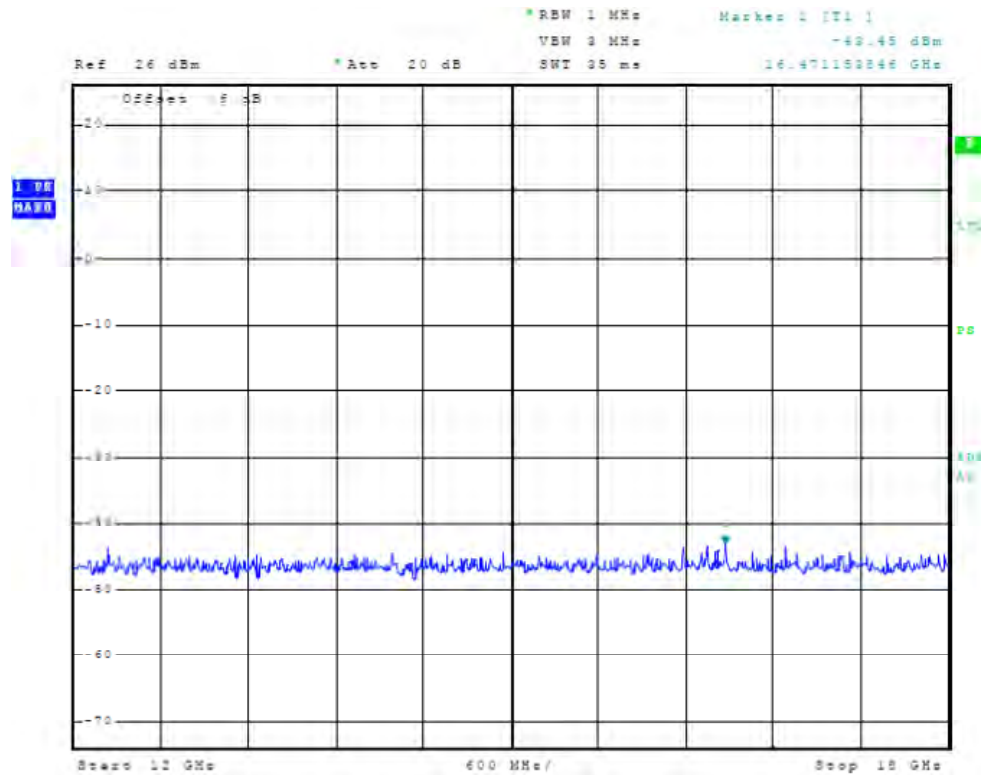


Figure 151 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0)

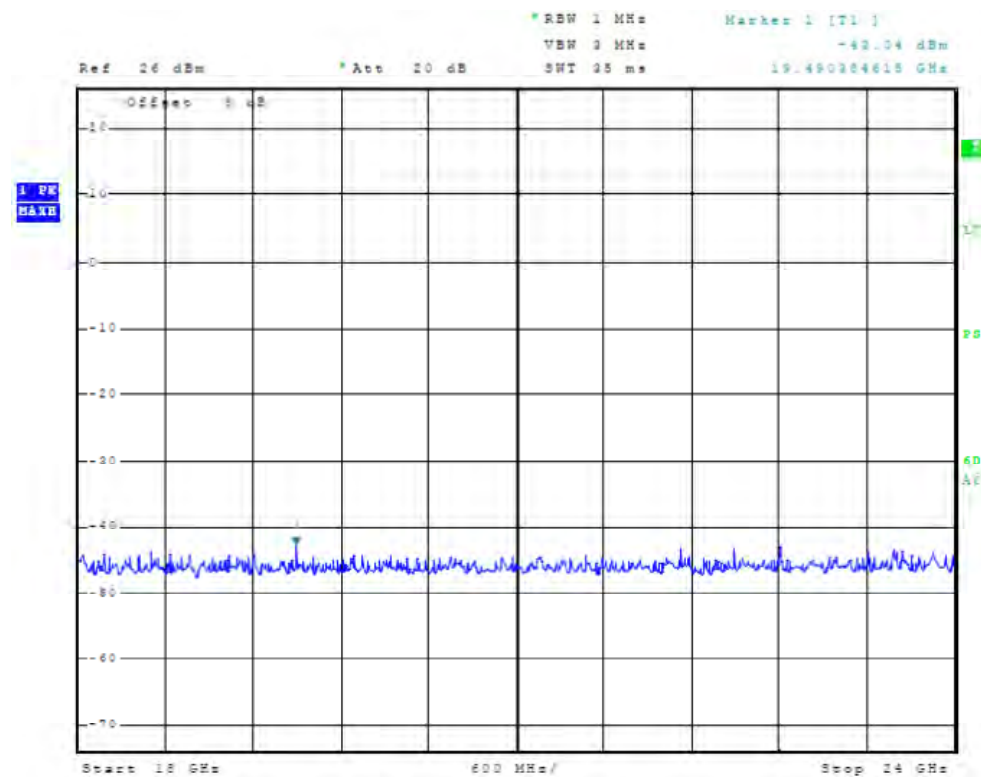


Figure 152 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0)

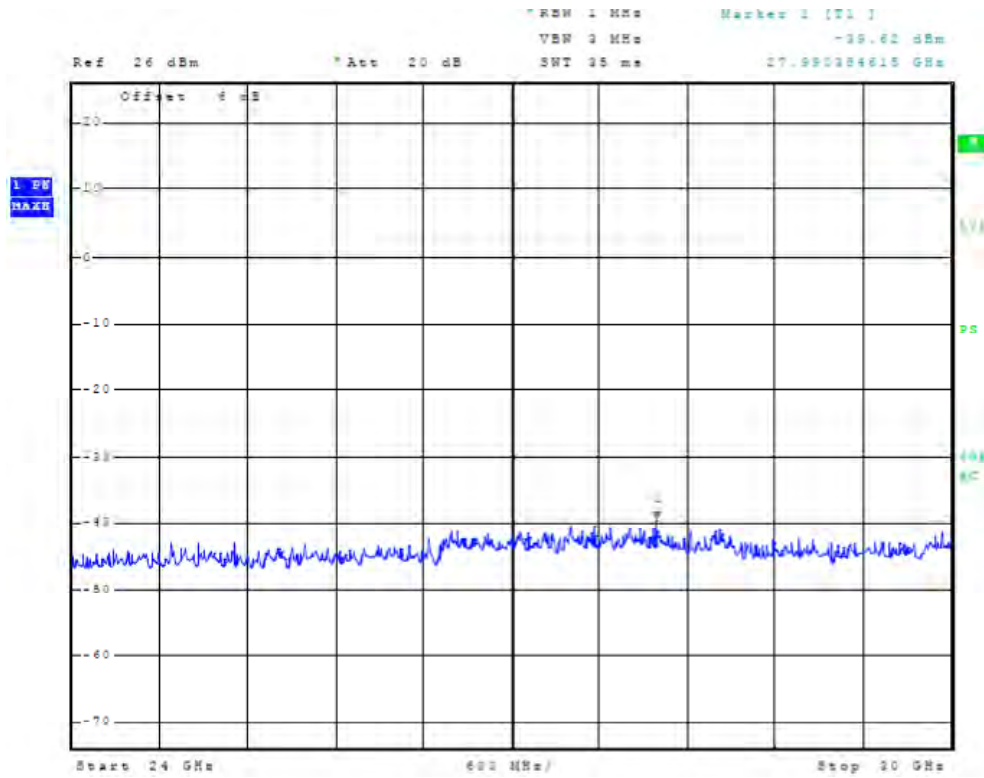


Figure 153 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0)

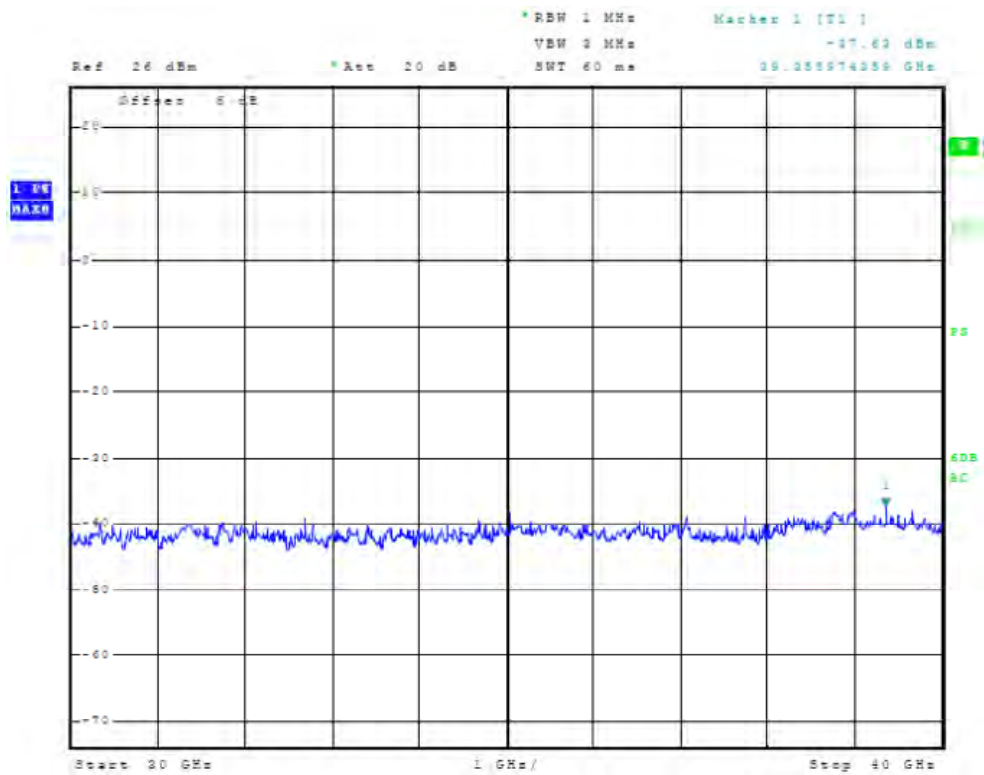


Figure 154 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 0)

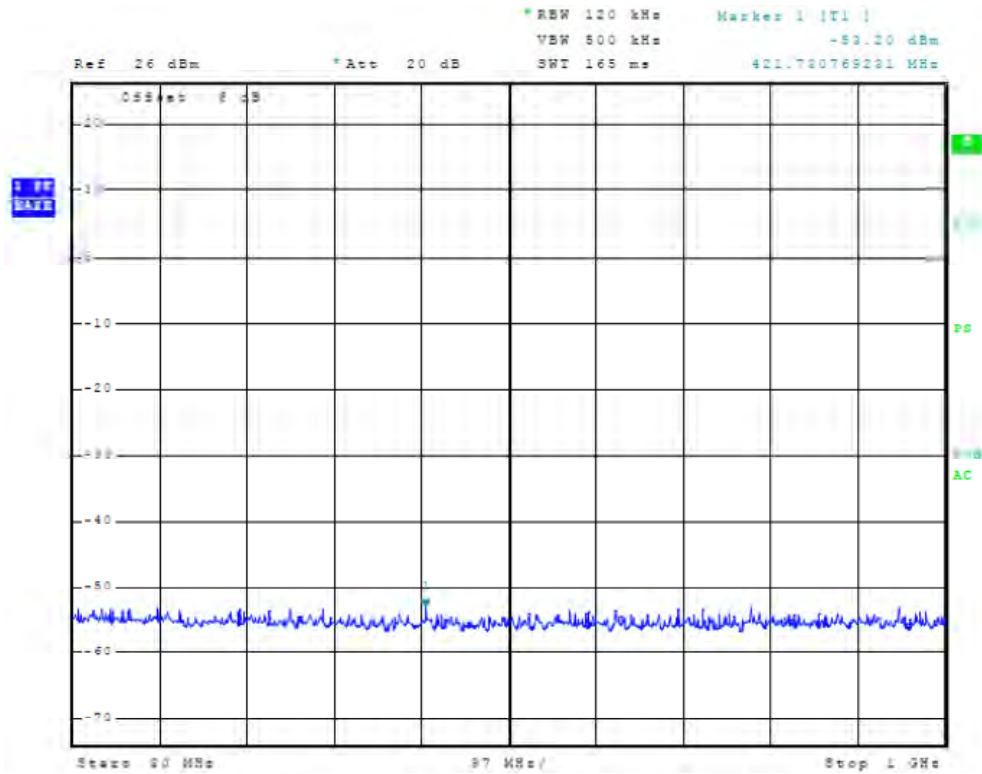


Figure 155 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)

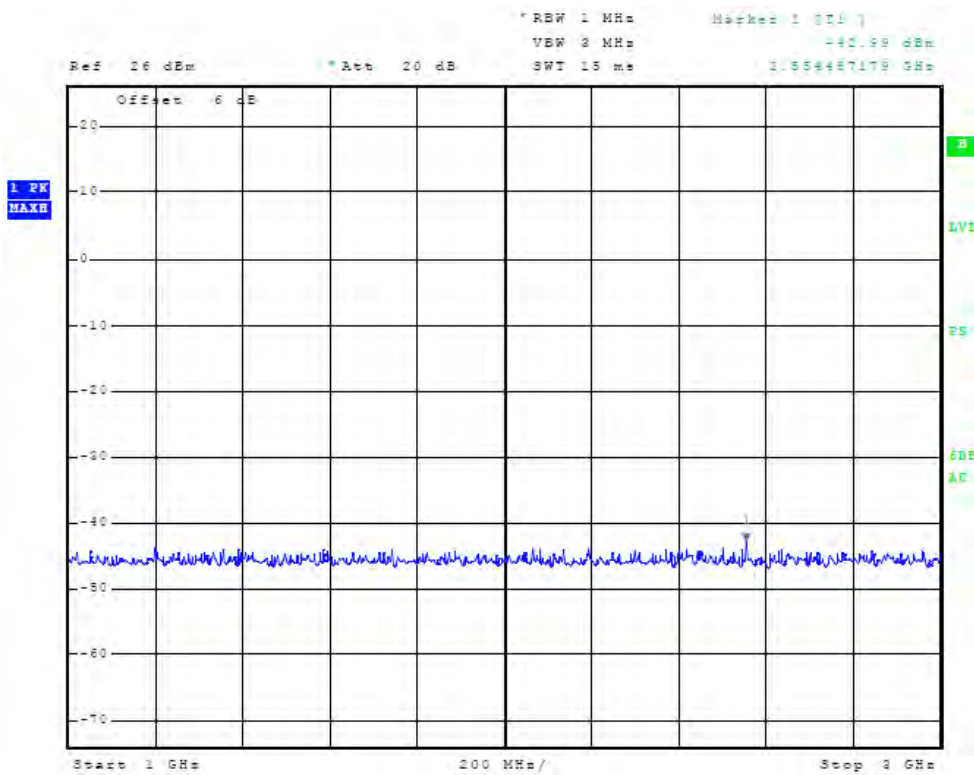


Figure 156 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)

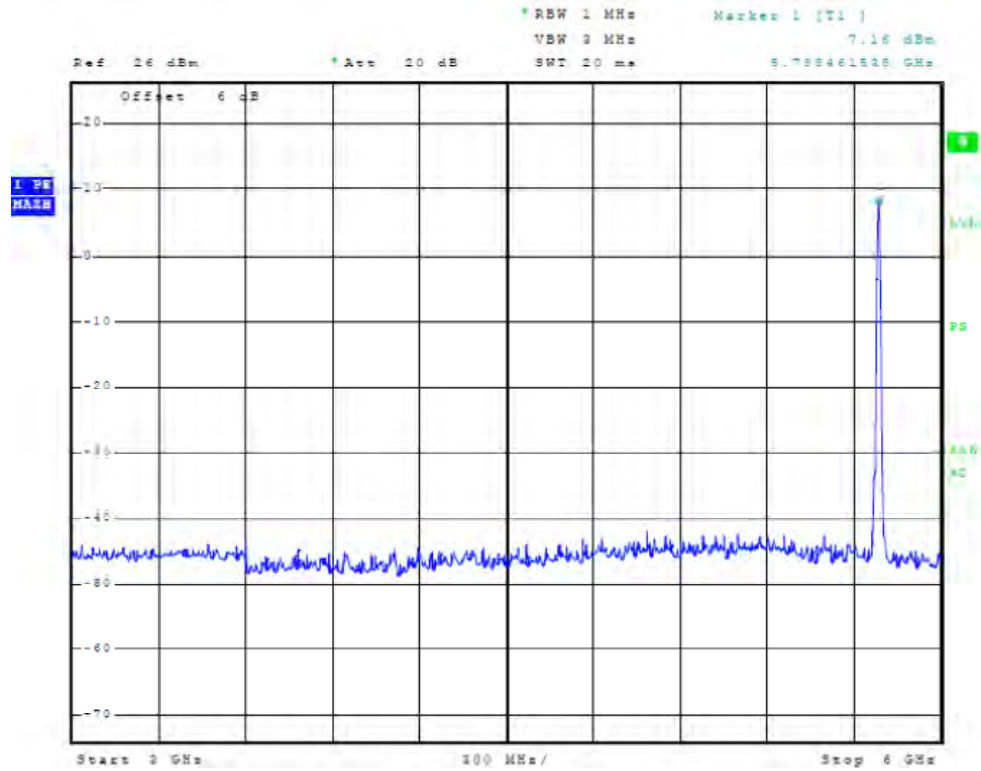


Figure 157 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)

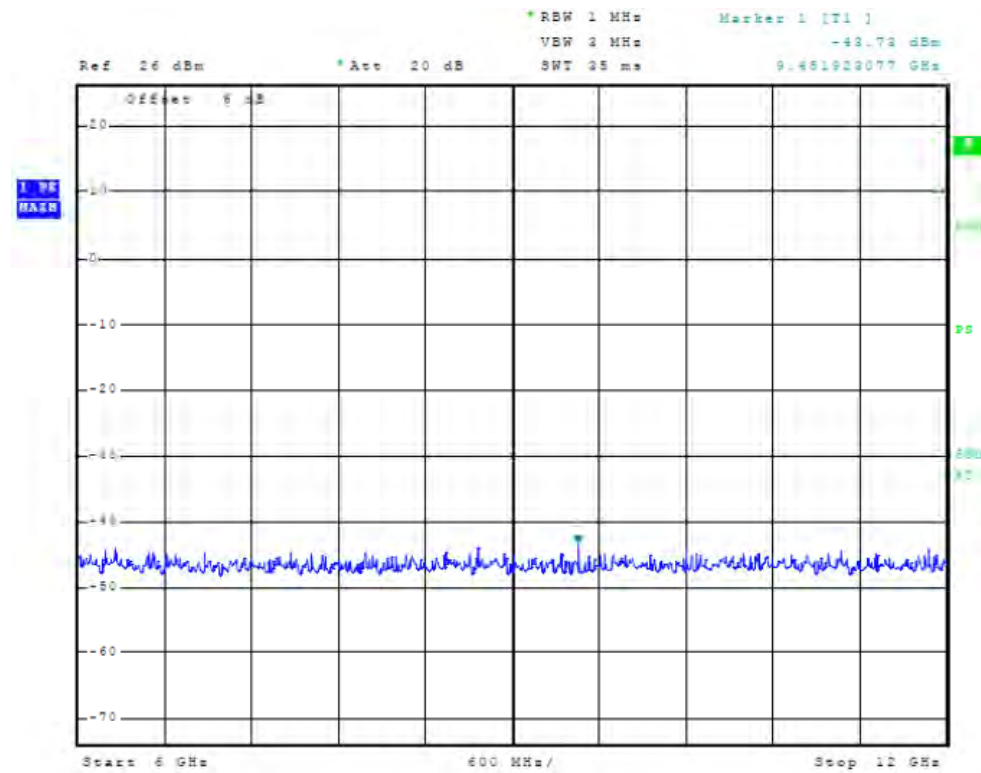


Figure 158 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)

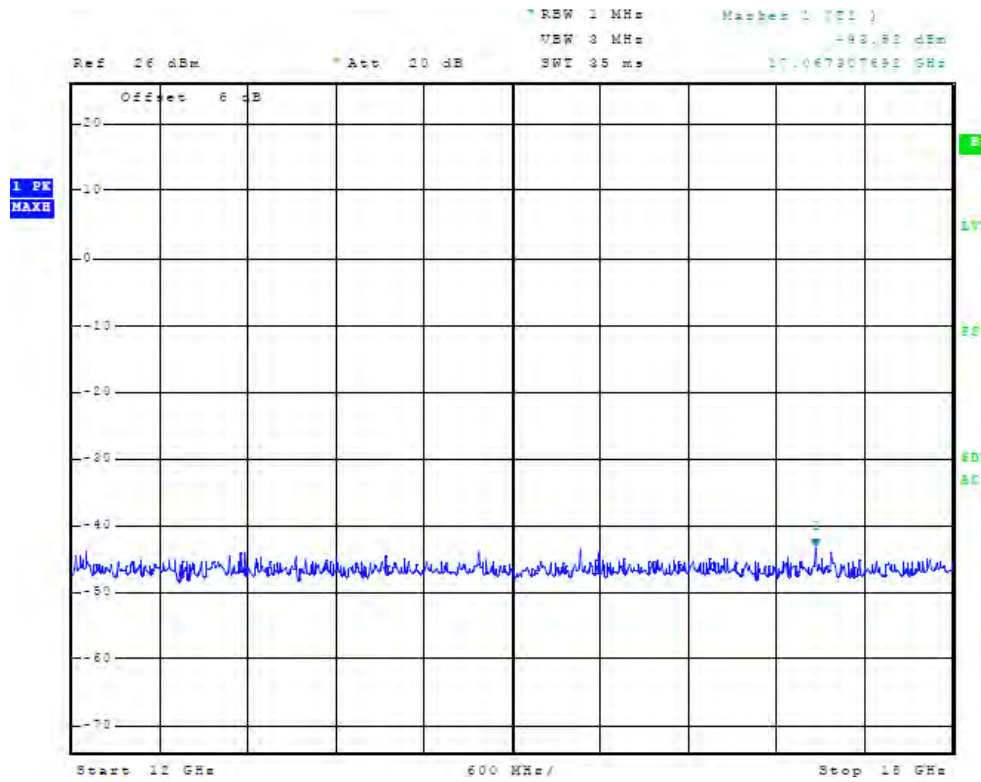


Figure 159 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)

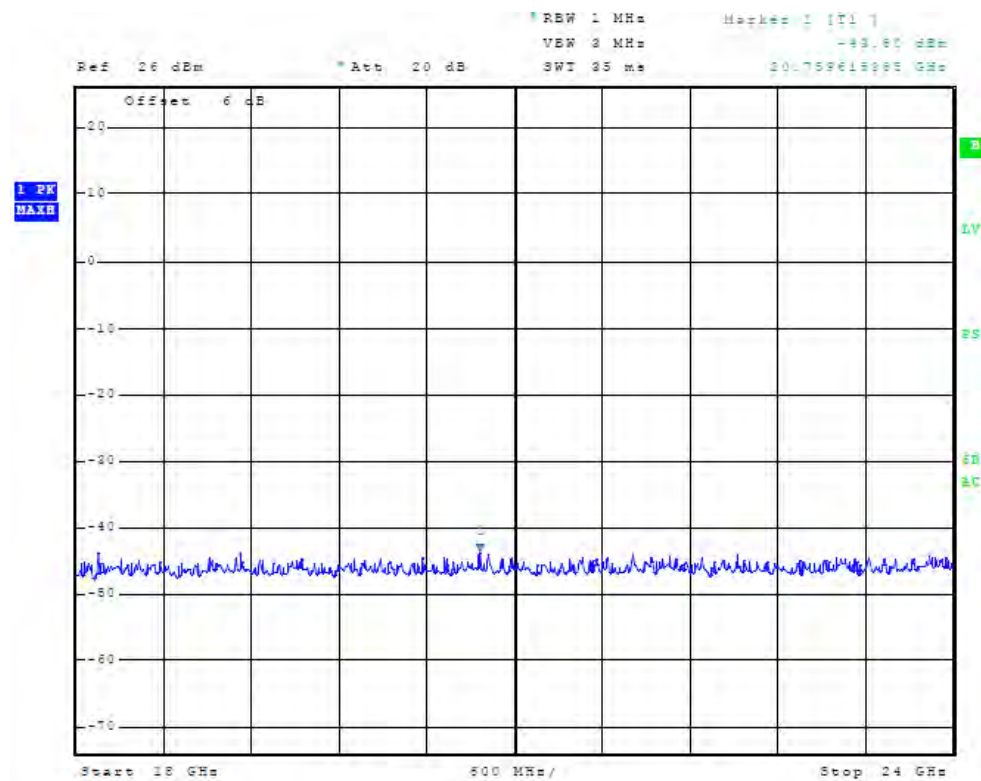


Figure 160 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)

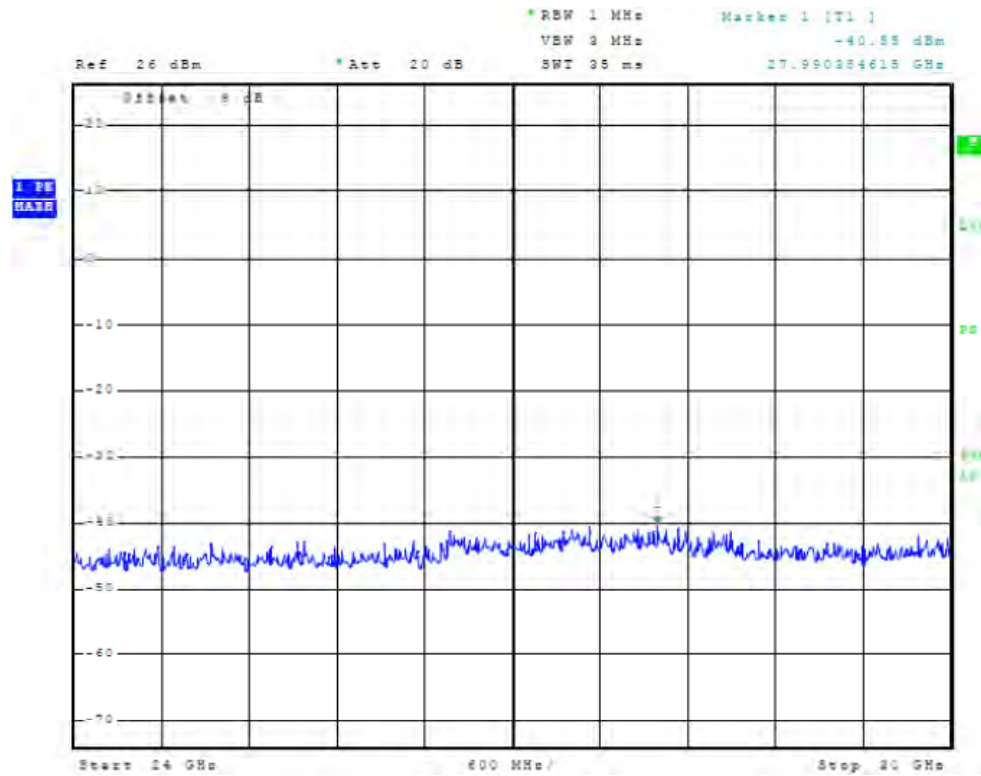


Figure 161 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)

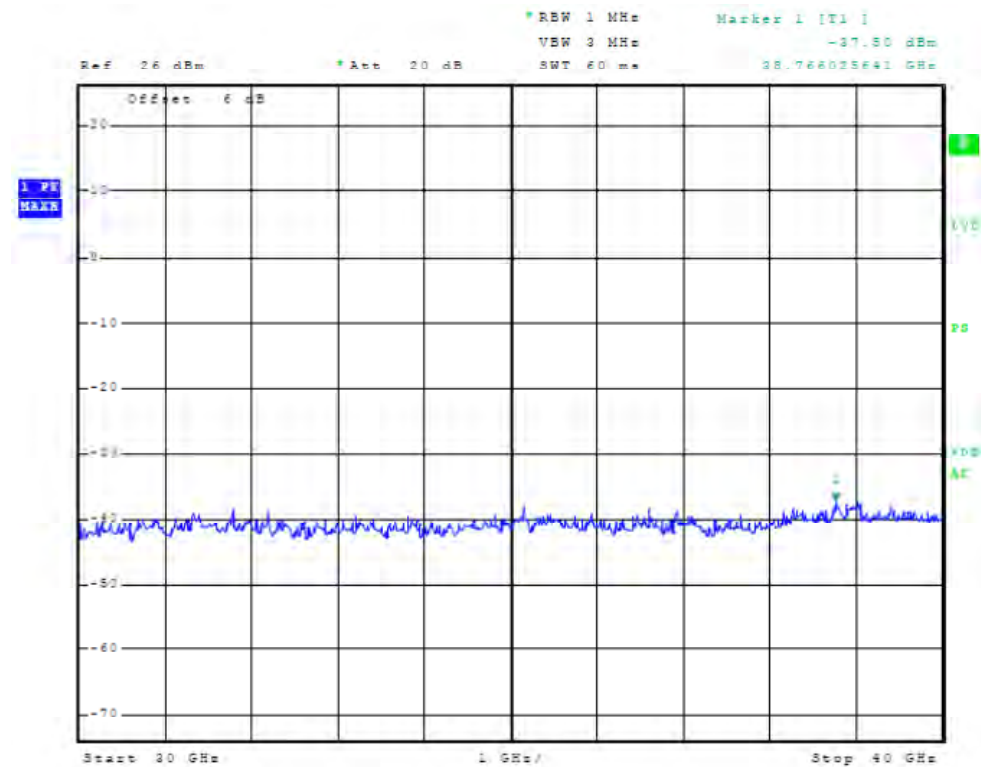


Figure 162 Plot of Antenna Port Conducted Emissions (5785 MHz Mode, Chain 1)



Transmitter Emissions Data
2412-2462 MHz Transmitter Data Summary (Chain 0)

Frequency MHz	Antenna Conducted Output Power dBm	Occupied Bandwidth kHz	Power Spectral Density dBm
20 MHz CCK			
2412.0	22.76	10857.3	3.58
2437.0	22.13	11378.2	2.48
2462.0	22.22	10987.4	2.50
20 MHz OFDM			
2412.0	20.12	10897.4	1.00
2437.0	20.15	10857.3	-0.14
2462.0	19.80	10857.3	-0.07
40MHz Mode			
2422.0	19.45	16586.5	-3.80
2437.0	19.02	16546.5	-4.11
2452.0	18.55	16546.5	-4.54

2412-2462 MHz Transmitter Data Summary (Chain 1)

Frequency MHz	Antenna Conducted Output Power dBm	Occupied Bandwidth kHz	Power Spectral Density dBm
20 MHz CCK			
2412.0	21.40	15,584.9	-11.08
2437.0	21.02	15,665.1	-11.06
2462.0	21.11	16,266.0	-10.28
20 MHz OFDM			
2412.0	21.43	17,147.4	-7.45
2437.0	21.02	17,147.4	-7.83
2462.0	21.16	16,826.9	-8.23
40MHz Mode			
2422.0	20.40	37,259.6	-10.86
2437.0	20.15	37,580.1	-11.29
2452.0	20.02	37,419.9	-10.89



5745-5825 MHz Transmitter Data Summary (Chain 0)

Frequency MHz	Antenna Conducted Output Power dBm	Occupied Bandwidth kHz	Power Spectral Density dBm
20 MHz CCK			
5745.0	18.28	10536.9	1.39
5785.0	17.19	10817.3	-0.71
5825.0	18.42	10817.3	-0.94
20 MHz OFDM			
5745.0	16.05	16546.5	-5.94
5785.0	16.13	16546.5	-2.81
5825.0	13.55	16586.5	-5.44
40MHz Mode			
5755.0	19.78	35897.4	-6.24
5785.0	20.41	35737.2	-3.46
5805.0	19.93	35897.4	-6.21

5745-5825 MHz Transmitter Data Summary (Chain 1)

Frequency MHz	Antenna Conducted Output Power dBm	Occupied Bandwidth kHz	Power Spectral Density dBm
20 MHz CCK			
5745.0	20.81	10817.3	0.91
5785.0	19.68	10777.2	0.33
5825.0	18.59	10737.2	0.45
20 MHz OFDM			
5745.0	18.46	16546.5	-2.19
5785.0	16.43	16546.5	-2.53
5825.0	14.88	16546.5	-3.82
40MHz Mode			
5755.0	21.63	35817.3	-2.05
5785.0	22.33	35897.4	-6.47
5805.0	21.72	35897.4	-4.01



Transmitter Total Power Spectral Density Data (Both Chains 2412-2462 MHz)

Frequency MHz	Power Spectral Density dBm
20 MHz CCK	
2412.0	5.49
2437.0	4.37
2462.0	4.41
20 MHz OFDM	
2412.0	0.36
2437.0	-0.45
2462.0	-0.54
40 MHz N-Mode	
2422.0	-3.24
2437.0	-4.11
2452.0	-4.35

Transmitter Total Power Spectral Density Data (Both Chains 5745-5825 MHz)

Frequency MHz	Power Spectral Density dBm
20 MHz CCK	
5745.0	4.17
5785.0	2.85
5825.0	2.82
20 MHz OFDM	
5745.0	-0.66
5785.0	0.34
5825.0	-1.54
40 MHz N-Mode	
5755.0	-0.65
5785.0	-1.70
5805.5	-1.96



Transmitter Antenna Port Harmonic Emissions Data (2412-2462 MHz CCK, Chain 0)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
2412.0	4824.0	-55.57	-75.8
	7236.0	-57.39	-77.6
	9648.0	-57.20	-77.4
	12060.0	-58.05	-78.3
	14472.0	-57.33	-77.5
2437.0	4874.0	-56.58	-76.3
	7311.0	-57.24	-77.0
	9748.0	-57.63	-77.4
	12185.0	-56.20	-76.0
	14622.0	-57.24	-77.0
2462.0	4924.0	-56.83	-76.3
	7386.0	-57.30	-76.8
	9848.0	-56.98	-76.5
	12310.0	-56.79	-76.3
	14772.0	-56.67	-76.1

Transmitter Antenna Port Harmonic Emissions Data (2412-2462 MHz CCK, Chain 1)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
2412.0	4824.0	-57.67	-77.9
	7236.0	-57.20	-77.4
	9648.0	-57.53	-77.7
	12060.0	-57.87	-78.1
	14472.0	-57.30	-77.5
2437.0	4874.0	-56.44	-76.2
	7311.0	-56.79	-76.6
	9748.0	-56.92	-76.7
	12185.0	-57.62	-77.4
	14622.0	-57.30	-77.1
2462.0	4924.0	-57.14	-76.6
	7386.0	-57.45	-76.9
	9848.0	-57.20	-76.7
	12310.0	-57.57	-77.0
	14772.0	-57.20	-76.7



Transmitter Antenna Port Harmonic Emissions Data (2412-2462 MHZ OFDM, Chain 0)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
2412.0	4824.0	-57.33	-77.5
	7236.0	-57.87	-78.1
	9648.0	-56.67	-76.9
	12060.0	-57.63	-77.8
	14472.0	-57.47	-77.7
2437.0	4874.0	-57.24	-77.0
	7311.0	-56.49	-76.3
	9748.0	-57.87	-77.6
	12185.0	-57.05	-76.8
	14622.0	-57.42	-77.2
2462.0	4924.0	-57.05	-76.5
	7386.0	-57.87	-77.3
	9848.0	-56.24	-75.7
	12310.0	-57.14	-76.6
	14772.0	-56.67	-76.1

Transmitter Antenna Port Harmonic Emissions Data (2412-2462 MHZ OFDM, Chain 1)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
2412.0	4824.0	-57.53	-77.7
	7236.0	-57.97	-78.2
	9648.0	-56.62	-76.8
	12060.0	-57.20	-77.4
	14472.0	-55.87	-76.1
2437.0	4874.0	-57.20	-77.0
	7311.0	-57.43	-77.2
	9748.0	-56.98	-76.7
	12185.0	-56.29	-76.1
	14622.0	-57.63	-77.4
2462.0	4924.0	-57.63	-77.1
	7386.0	-57.57	-77.0
	9848.0	-57.73	-77.2
	12310.0	-57.57	-77.0
	14772.0	-56.74	-76.2



Transmitter Antenna Port Harmonic Emissions Data (5745-5825 MHz CCK, Chain 0)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
5745.0	11490.0	-52.38	-72.2
	17235.0	-52.84	-72.6
	22980.0	-52.52	-72.3
	28725.0	-50.06	-69.8
	34470.0	-48.89	-68.7
5785.0	11570.0	-52.65	-73.1
	17355.0	-52.68	-73.1
	23140.0	-51.39	-71.8
	28925.0	-49.98	-70.4
	34710.0	-48.99	-69.4
5825.0	11650.0	-53.20	-73.1
	17475.0	-52.38	-72.3
	23300.0	-52.76	-72.7
	29125.0	-51.43	-71.4
	34950.0	-47.09	-67.0

Transmitter Antenna Port Harmonic Emissions Data (5745-5825 MHz CCK, Chain 1)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
5745.0	11490.0	-52.71	-72.5
	17235.0	-51.62	-71.4
	22980.0	-52.38	-72.2
	28725.0	-50.81	-70.6
	34470.0	-49.24	-69.0
5785.0	11570.0	-53.20	-73.6
	17355.0	-51.84	-72.3
	23140.0	-52.26	-72.7
	28925.0	-50.91	-71.3
	34710.0	-48.15	-68.6
5825.0	11650.0	-51.76	-71.7
	17475.0	-52.79	-72.7
	23300.0	-52.57	-72.5
	29125.0	-50.21	-70.1
	34950.0	-48.58	-68.5



Transmitter Antenna Port Harmonic Emissions Data (5745-5825 MHZ OFDM, Chain 0)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
5745.0	11490.0	-51.46	-71.2
	17235.0	-53.12	-72.9
	22980.0	-51.98	-71.8
	28725.0	-50.38	-70.2
	34470.0	-48.33	-68.1
5785.0	11570.0	-52.52	-72.9
	17355.0	-52.94	-73.4
	23140.0	-52.38	-72.8
	28925.0	-50.65	-71.1
	34710.0	-48.43	-68.8
5825.0	11650.0	-52.71	-72.6
	17475.0	-52.41	-72.3
	23300.0	-51.94	-71.9
	29125.0	-50.91	-70.8
	34950.0	-47.64	-67.6

Transmitter Antenna Port Harmonic Emissions Data (5745-5825 MHZ OFDM, Chain 1)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
5745.0	11490.0	-56.65	-76.4
	17235.0	-53.71	-73.5
	22980.0	-52.01	-71.8
	28725.0	-50.53	-70.3
	34470.0	-48.22	-68.0
5785.0	11570.0	-52.45	-72.9
	17355.0	-52.75	-73.2
	23140.0	-52.08	-72.5
	28925.0	-50.57	-71.0
	34710.0	-48.33	-68.7
5825.0	11650.0	-52.31	-72.2
	17475.0	-52.26	-72.2
	23300.0	-51.81	-71.7
	29125.0	-50.91	-70.8
	34950.0	-47.90	-67.8

Transmitter Radiated Emission (2412-2462 MHz, Worst-case)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2412.0	132.2	122.3	118.2	112.3	--
4824.0	50.0	37.1	50.1	37.2	54.0
7236.0	48.8	35.9	49.5	35.8	54.0
9648.0	51.1	37.7	50.5	37.6	54.0
12060.0	49.7	36.1	48.9	36.1	54.0
2437.0	132.1	122.0	117.6	109.7	--
4874.0	50.2	36.8	49.4	36.9	54.0
7311.0	46.4	33.2	47.2	33.2	54.0
9748.0	49.7	37.0	49.8	36.7	54.0
12185.0	48.1	35.4	48.1	35.4	54.0
2462.0	132.0	122.1	117.7	112.3	--
4924.0	49.2	36.1	49.0	36.2	54.0
7386.0	46.2	33.5	46.1	33.6	54.0
9848.0	49.4	36.8	50.0	36.6	54.0
12310.0	47.7	35.1	47.9	35.1	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Transmitter Radiated Emission (5745-5825 MHz, Worst-case)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
5745.0	107.5	97.3	134.6	124.8	--
11490.0	49.2	35.5	51.0	37.2	54.0
17235.0	54.5	41.8	54.9	41.8	54.0
22980.0	38.5	24.9	38.7	25.0	54.0
28725.0	37.9	24.9	37.9	25.1	54.0
5785.0	109.3	99.1	136.0	125.8	--
11570.0	49.7	36.2	49.5	36.1	54.0
17355.0	53.6	41.2	54.2	41.3	54.0
23140.0	38.5	25.4	38.9	25.4	54.0
28925.0	38.4	25.9	38.7	26.0	54.0
5825.0	109.2	98.8	134.7	124.9	--
11650.0	48.4	35.7	49.1	35.8	54.0
17475.0	55.9	42.6	55.4	42.7	54.0
23300.0	34.7	22.5	35.1	23.5	54.0
29125.0	37.2	24.3	37.1	24.4	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the conducted and radiated emissions requirements of CFR47 Part 15.247. Conducted antenna port power on single chain 23 dBm, 0.200 Watts was measured. The EUT demonstrated a minimum harmonic radiated emission margin of -11.3 dB below the requirements. There are no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. The EUT demonstrated compliance with requirements of CFR47 15.247. There were no deviations or exceptions to the requirements.

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the CFR47 Part 15C emissions standards. There were no deviations to the specifications.



NVLAP Lab Code 200087-0

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

Annex A Measurement Uncertainty Calculations

Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Antenna factor calibration	normal (k = 2)	±0.58
Cable loss calibration	normal (k = 2)	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	±0.1
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	±0.1
Measurement distance variation	rectangular	±0.2
Site Imperfections	rectangular	±1.5
Combined standard uncertainty $u_c(y)$ is		

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3}\right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that $u_c(y) / s(q_k) > 3$, where $s(q_k)$ is estimated standard deviation from a sample of n readings unless the repeatability of the EUT is particularly poor, and a coverage factor of $k = 2$ will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 \times \pm 1.6 \text{ dB} = \pm 3.2 \text{ dB}$$

Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with $k = 2$.
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
 - Unwanted reflections from adjacent objects.
 - Ground plane imperfections: reflection coefficient, flatness, and edge effects.
 - Losses or reflections from "transparent" cabins for the EUT or site coverings.
 - Earth currents in antenna cable (mainly effect Biconical antennas).



The specified limits for the difference between measured site attenuation and the theoretical value (± 4 dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

Conducted Measurements Uncertainty Calculation

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Receiver specification	rectangular	± 1.5
LISN coupling specification	rectangular	± 1.5
Cable and input attenuator calibration	normal (k=2)	± 0.5
Combined standard uncertainty $u_c(y)$ is		

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that $u_c(y) / s(q_k) > 3$ and a coverage factor of $k = 2$ will suffice, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.2 \text{ dB} = \pm 2.4 \text{ dB}$$



Annex B Rogers Labs Test Equipment List

The test equipment is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Calibration Date
Spectrum Analyzer: Rohde & Schwarz ESU40	5/11
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520 Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	5/11
Spectrum Analyzer: HP 8591EM	5/11
Antenna: EMCO Biconilog Model: 3143	5/11
Antenna: Sunol Biconilog Model: JB6	10/11
Antenna: EMCO Log Periodic Model: 3147	10/11
Antenna: Antenna Research Biconical Model: BCD 235	10/11
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohm/0.1 µf	10/11
R.F. Preamp CPPA-102	10/11
Attenuator: HP Model: HP11509A	10/11
Attenuator: Mini Circuits Model: CAT-3	10/11
Attenuator: Mini Circuits Model: CAT-3	10/11
Cable: Belden RG-58 (L1)	10/11
Cable: Belden RG-58 (L2)	10/11
Cable: Belden 8268 (L3)	10/11
Cable: Time Microwave: 4M-750HF290-750	10/11
Cable: Time Microwave: 10M-750HF290-750	10/11
Frequency Counter: Leader LDC825	2/11
Oscilloscope Scope: Tektronix 2230	2/11
Wattmeter: Bird 43 with Load Bird 8085	2/11
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/11
R.F. Generators: HP 606A, HP 8614A, HP 8640B	2/11
R.F. Power Amp 65W Model: 470-A-1010	2/11
R.F. Power Amp 50W M185- 10-501	2/11
R.F. Power Amp A.R. Model: 10W 1010M7	2/11
R.F. Power Amp EIN Model: A301	2/11
LISN: Compliance Eng. Model 240/20	2/11
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08	2/11
Antenna: EMCO Dipole Set 3121C	2/11
Antenna: C.D. B-101	2/11
Antenna: Solar 9229-1 & 9230-1	2/11
Antenna: EMCO 6509	2/11
Audio Oscillator: H.P. 201CD	2/11
Peavey Power Amp Model: IPS 801	2/11
ELGAR Model: 1751	2/11
ELGAR Model: TG 704A-3D	2/11
ESD Test Set 2010i	2/11
Fast Transient Burst Generator Model: EFT/B-101	2/11
Field Intensity Meter: EFM-018	2/11
KEYTEK Ecat Surge Generator	2/11
Shielded Room 5 M x 3 M x 3.0 M	



Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers



NVLAP Lab Code 200087-0

Annex D FCC Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

May 18, 2010

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace,
Louisburg, KS 66053

Attention: Scot Rogers,


Re: Measurement facility located at Louisburg
~~3 & 10 meter site~~
Date of Renewal: May 18, 2010

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

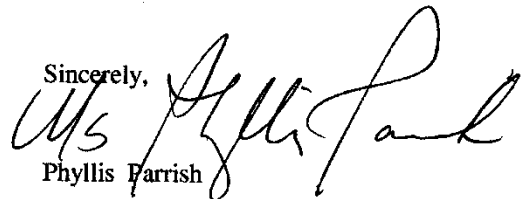

Phyllis Farrish
Industry Analyst

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1


ARC Wireless LLC
Model: ARCFlex 802.11 abgn Module
Test #: 111109A
Test to: CFR47 (15.247)
File: ARC Wireless ARCFlex TstRpt 111109A

SN: ENG1
FCC ID#: Z2B-AFM2
Date: December 5, 2011
Page 111 of 112



NVLAP Lab Code 200087-0

Annex E Industry Canada Site Registration Letter



May 26, 2010

OUR FILE: 46405-3041
Submission No: 140719

Rogers Labs Inc.

4405 West 259th Terrace
Louisburg, KY, 66053
USA

Attention: Mr. Scot D. Rogers

Dear Sir/Madame:

The Bureau has received your application for the renewal of a 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information:

- Your primary code is: **3041**
- The company number associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed two years. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/11_ft00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

Dalwinder Gill
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station "H"
Ottawa, Ontario K2H 8S2
Email: dalwinder.gill@ic.gc.ca
Tel. No. (613) 998-8363
Fax. No. (613) 990-4752

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

ARC Wireless LLC
Model: ARCFlex 802.11 abgn Module
Test #: 111109A
Test to: CFR47 (15.247)
File: ARC Wireless ARCFlex TstRpt 111109A

SN: ENG1
FCC ID#: Z2B-AFM2
Date: December 5, 2011
Page 112 of 112