

# FCC Part 15C Measurement and Test Report

For

**Perixx Computer GmbH**

**Heerdter Landstrasse 189e, 40549 Düsseldorf, Germany**

**FCC ID: Z2G-PERIBOARD-612**

<b>FCC Rule(s):</b>	<u>FCC Part 15.249</u>
<b>Product Description:</b>	<u>Wireless Dual Mode Ergonomic Split Keyboard</u>
<b>Tested Model:</b>	<u>PERIBOARD-612</u>
<b>Report No.:</b>	<u>WTX19X05030186W-2</u>
<b>Sample Receipt Date:</b>	<u>2019-05-14</u>
<b>Tested Date:</b>	<u>2019-05-14 to 2019-05-31</u>
<b>Issued Date:</b>	<u>2019-05-31</u>
<b>Tested By:</b>	<u>Mike Shi / Engineer</u> <i>Mike Shi</i>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u> <i>Jandy So</i>
<b>Prepared By:</b>	

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....3**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

    1.2 TEST STANDARDS.....4

    1.3 TEST METHODOLOGY.....4

    1.4 TEST FACILITY.....4

    1.5 EUT SETUP AND TEST MODE.....5

    1.6 MEASUREMENT UNCERTAINTY.....5

    1.7 TEST EQUIPMENT LIST AND DETAILS.....6

**2. SUMMARY OF TEST RESULTS .....8**

**3. ANTENNA REQUIREMENTS.....9**

    3.1 STANDARD APPLICABLE.....9

    3.2 TEST RESULT.....9

**4. RADIATED EMISSIONS.....10**

    4.1 STANDARD APPLICABLE.....10

    4.2 TEST PROCEDURE.....10

    4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....12

    4.4 SUMMARY OF TEST RESULTS/PLOTS.....12

**5. OUT OF BAND EMISSIONS.....21**

    5.1 STANDARD APPLICABLE.....21

    5.2 TEST PROCEDURE.....21

    5.3 SUMMARY OF TEST RESULTS/PLOTS.....21

**6. EMISSION BANDWIDTH.....24**

    6.1 STANDARD APPLICABLE.....24

    6.2 TEST PROCEDURE.....24

    6.3 SUMMARY OF TEST RESULTS/PLOTS.....24

**7. CONDUCTED EMISSIONS .....26**

    7.1 TEST PROCEDURE.....26

    7.2 BASIC TEST SETUP BLOCK DIAGRAM.....26

    7.3 TEST RECEIVER SETUP.....26

    7.4 SUMMARY OF TEST RESULTS/PLOTS.....26

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Perixx Computer GmbH  
Address of applicant: Heerdter Landstrasse 189e, 40549 Düsseldorf, Germany

Manufacturer: Perixx Computer GmbH  
Address of manufacturer: Heerdter Landstrasse 189e, 40549 Düsseldorf, Germany

General Description of EUT	
Product Name:	Wireless Dual Mode Ergonomic Split Keyboard
Trade Name:	PERIXX
Model No.:	PERIBOARD-612
Adding Model(s):	PERIDUO-612
Rated Voltage:	DC3V
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model PERIBOARD-612, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2403MHz-2480MHz
Max. Field Strength:	98.48dBuV/m
Modulation:	GFSK
Quantity of Channels:	78
Channel Separation:	1MHz
Antenna Type:	PCB Antenna
Antenna Gain:	0.9dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.249:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2403MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	± 1.5%
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	CCS	EZ-EMC	V1.0
EMI Test Software (Conducted Emission)*	CCS	EZ-EMC	V1.0

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test Item	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215(c)	Emission Bandwidth	Compliant



### **3. Antenna Requirements**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has an PCB antenna, fulfill the requirement of this section.

## 4. Radiated Emissions

---

### 4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

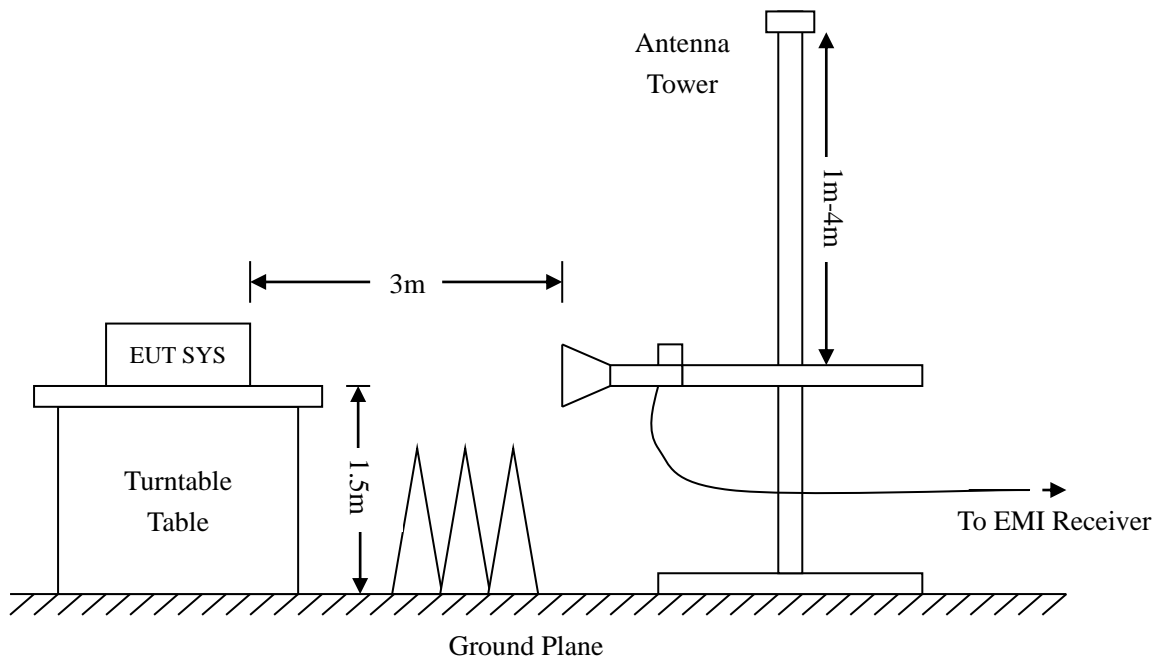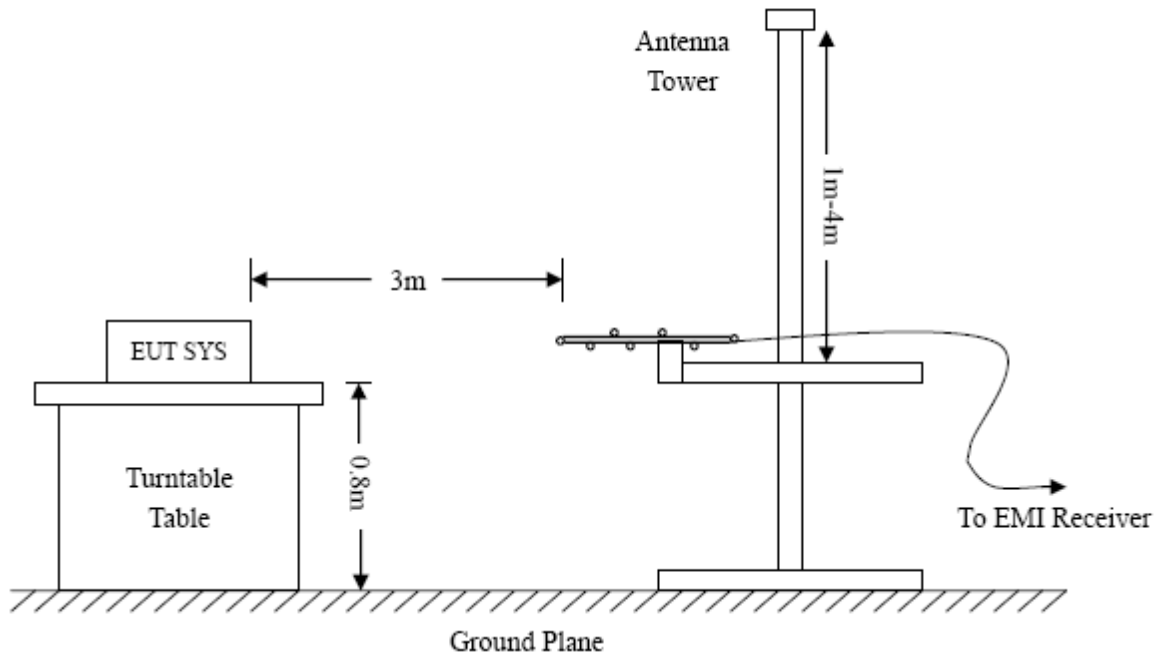

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

### 4.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

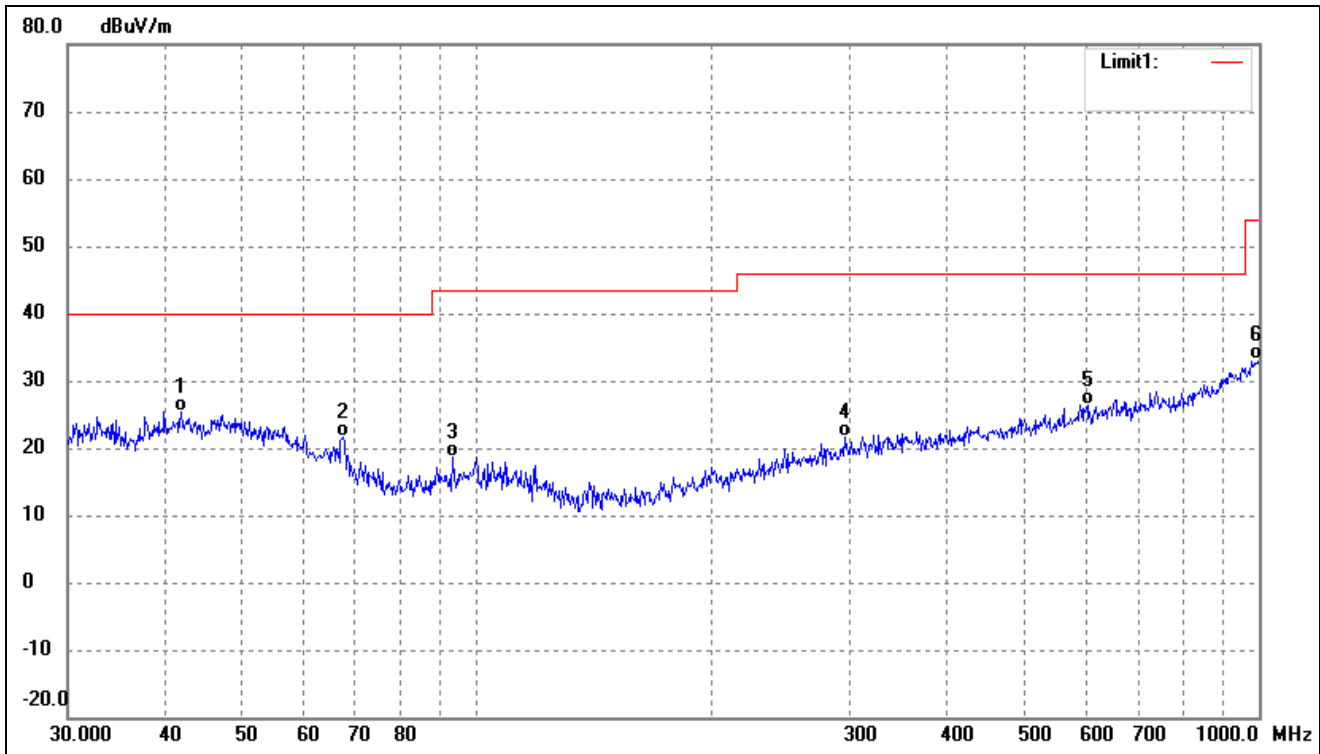


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.8596	33.55	-8.07	25.48	40.00	-14.52	293	100	QP
2	67.4382	34.90	-13.32	21.58	40.00	-18.42	98	100	QP
3	93.1132	34.10	-15.36	18.74	43.50	-24.76	163	100	QP
4	295.1469	31.02	-9.43	21.59	46.00	-24.41	111	100	QP
5	603.5392	30.43	-3.95	26.48	46.00	-19.52	58	100	QP
6	1000.0000	29.21	4.04	33.25	54.00	-20.75	328	100	QP

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

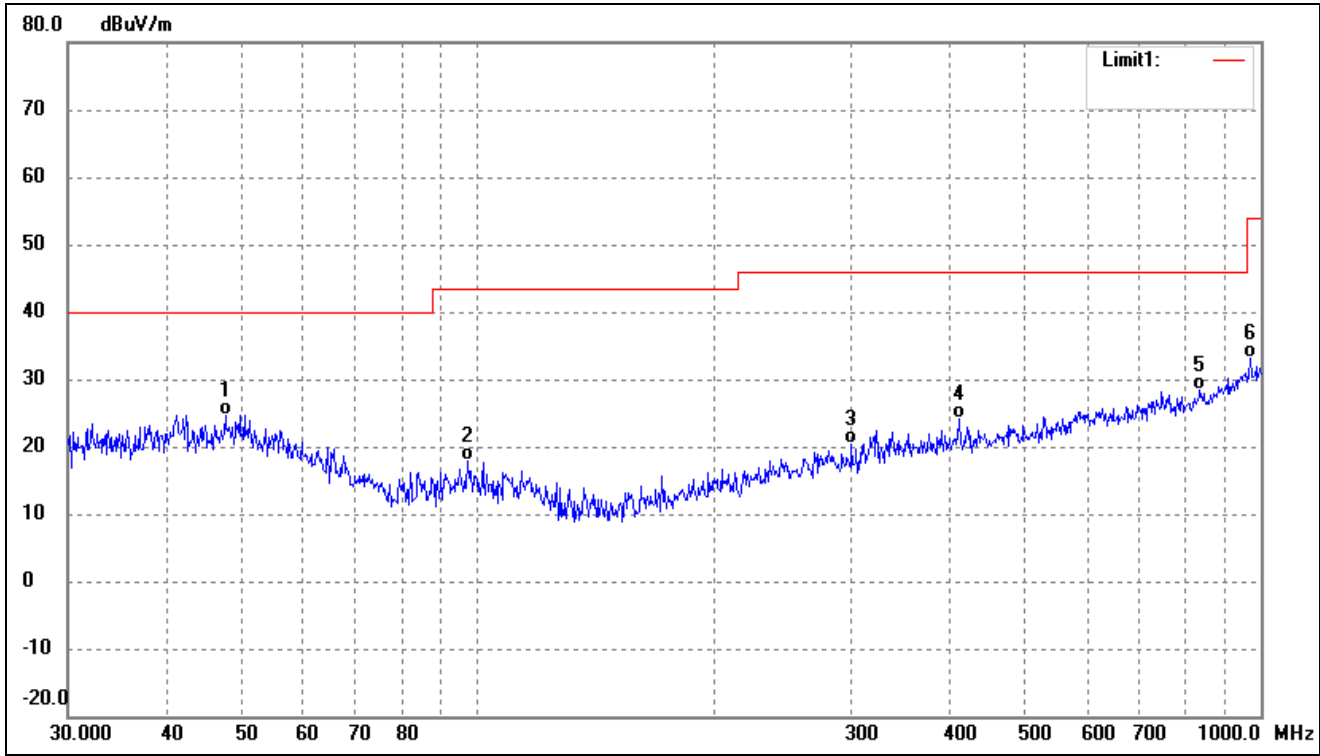


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.6586	32.88	-8.15	24.73	40.00	-15.27	323	100	QP
2	97.1148	32.83	-15.03	17.80	43.50	-25.70	100	100	QP
3	300.3673	29.89	-9.40	20.49	46.00	-25.51	119	100	QP
4	411.8240	31.36	-7.12	24.24	46.00	-21.76	115	100	QP
5	836.2443	28.83	-0.49	28.34	46.00	-17.66	57	100	QP
6	968.9338	29.86	3.25	33.11	54.00	-20.89	283	100	QP

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

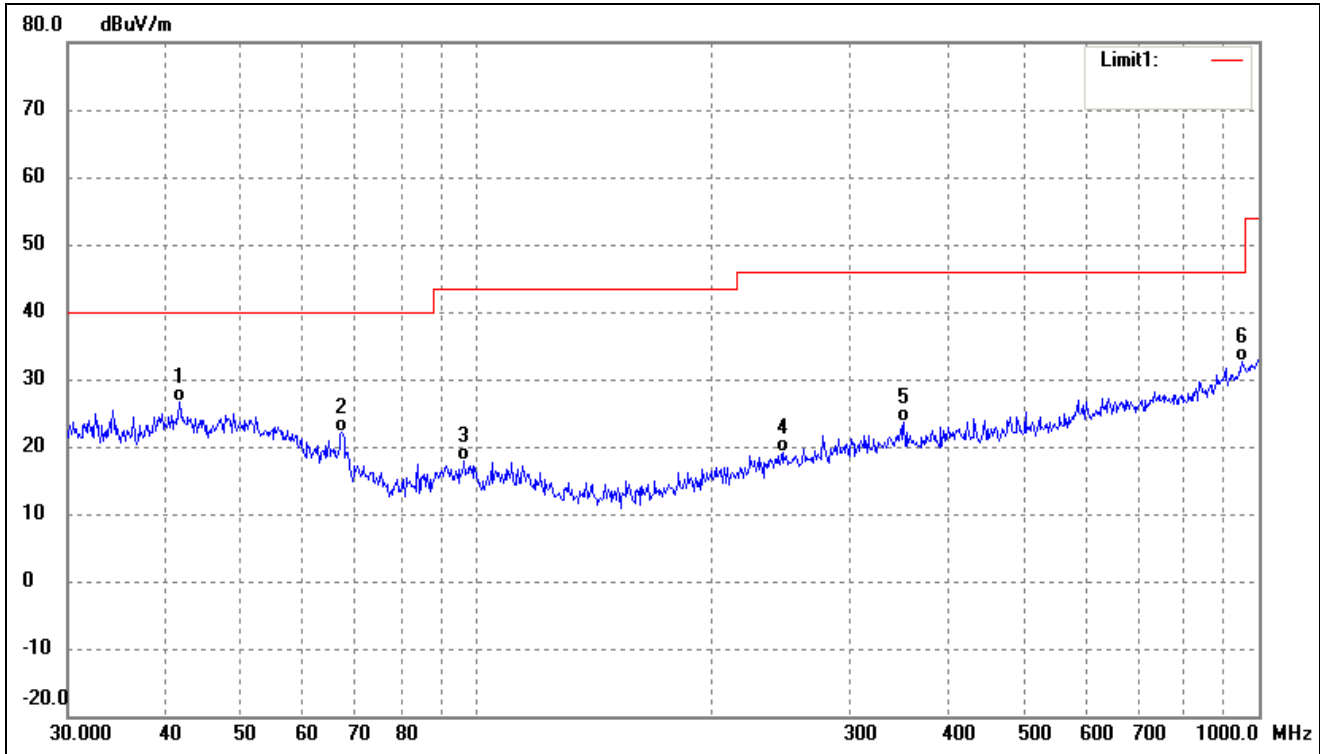

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.7130	34.69	-8.10	26.59	40.00	-13.41	194	100	QP
2	67.2022	35.38	-13.20	22.18	40.00	-17.82	229	100	QP
3	96.4362	32.92	-15.05	17.87	43.50	-25.63	69	100	QP
4	245.9509	30.31	-11.23	19.08	46.00	-26.92	326	100	QP
5	351.7079	31.52	-7.98	23.54	46.00	-22.46	164	100	QP
6	952.0937	29.62	2.91	32.53	46.00	-13.47	166	100	QP


Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

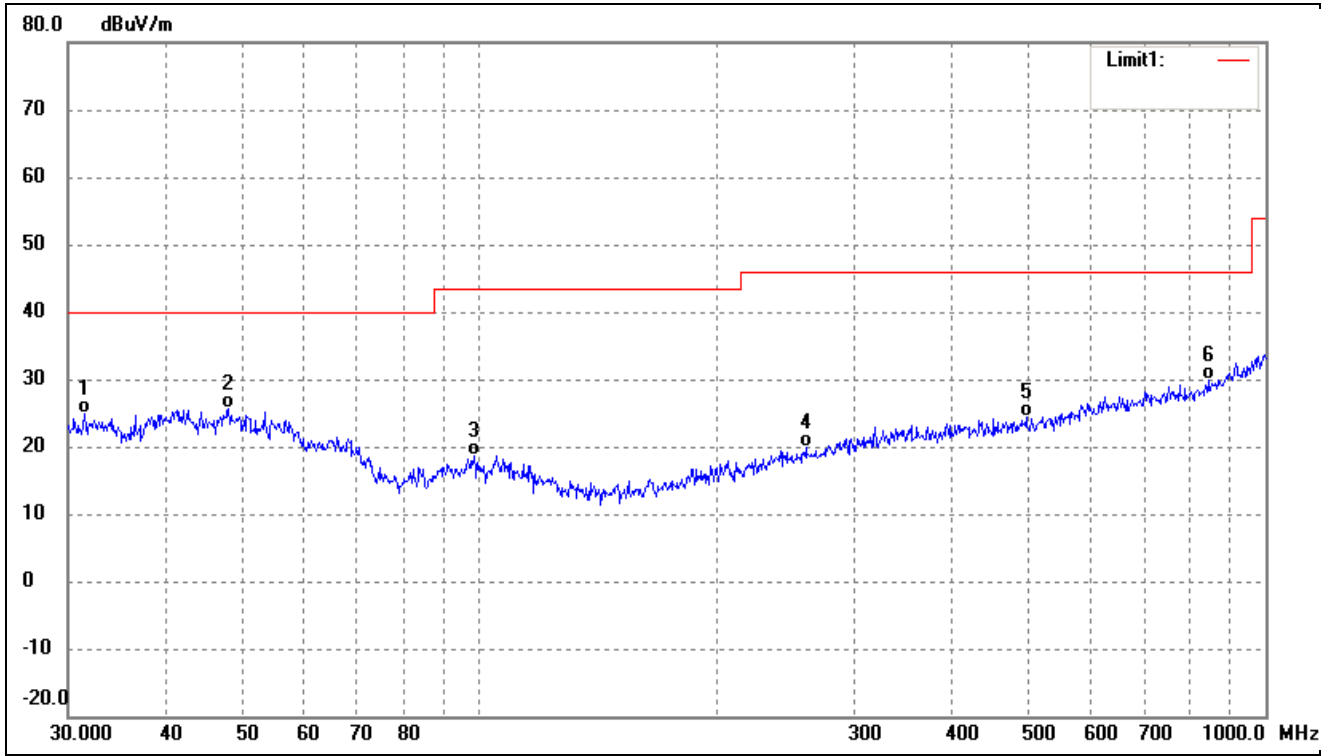

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	31.5095	34.48	-9.63	24.85	40.00	-15.15	64	100	QP
2	47.9940	33.80	-8.16	25.64	40.00	-14.36	217	100	QP
3	98.4866	33.67	-14.97	18.70	43.50	-24.80	90	100	QP
4	260.1444	30.81	-10.83	19.98	46.00	-26.02	199	100	QP
5	495.9344	30.30	-6.02	24.28	46.00	-21.72	153	100	QP
6	845.0878	30.18	-0.31	29.87	46.00	-16.13	275	100	QP




Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

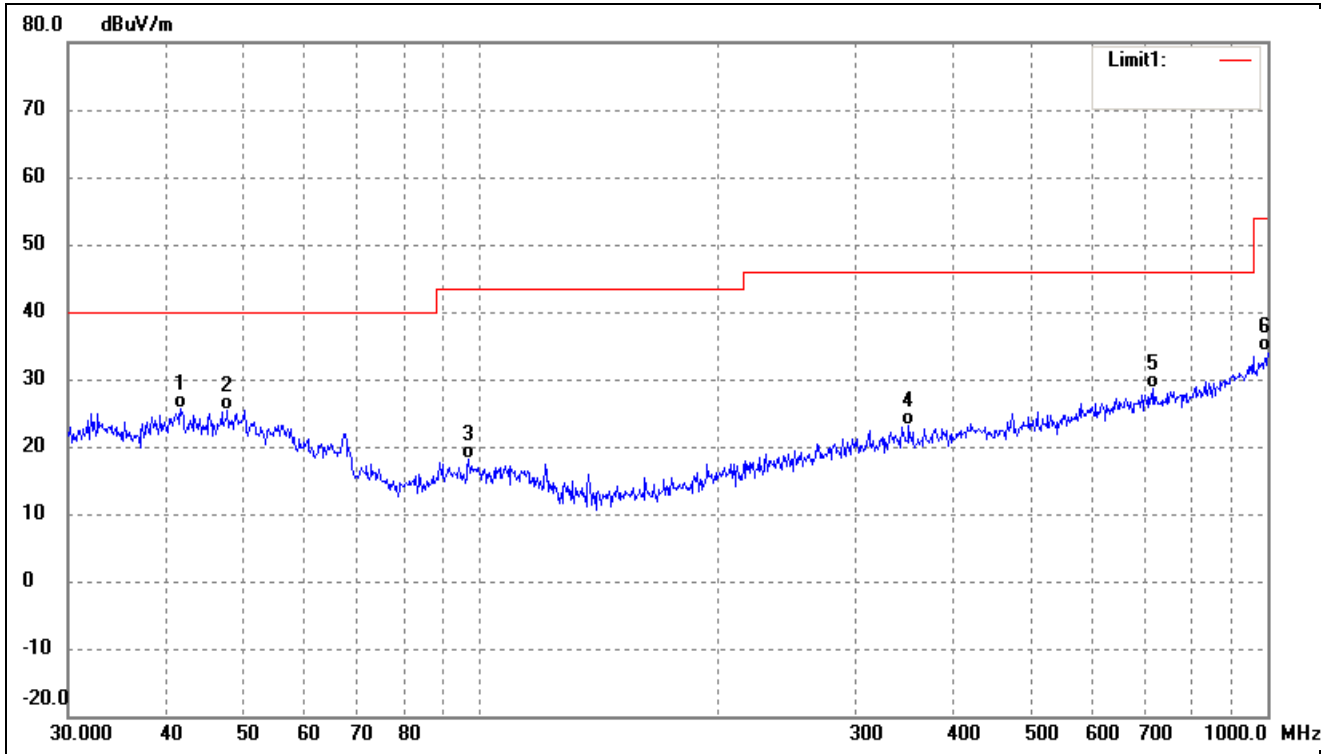

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.7130	33.71	-8.10	25.61	40.00	-14.39	135	100	QP
2	47.8260	33.45	-8.16	25.29	40.00	-14.71	92	100	QP
3	96.7749	33.28	-15.04	18.24	43.50	-25.26	71	100	QP
4	350.4768	31.08	-7.96	23.12	46.00	-22.88	109	100	QP
5	716.6820	31.10	-2.40	28.70	46.00	-17.30	155	100	QP
6	1000.0000	30.12	4.04	34.16	54.00	-19.84	340	100	QP

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

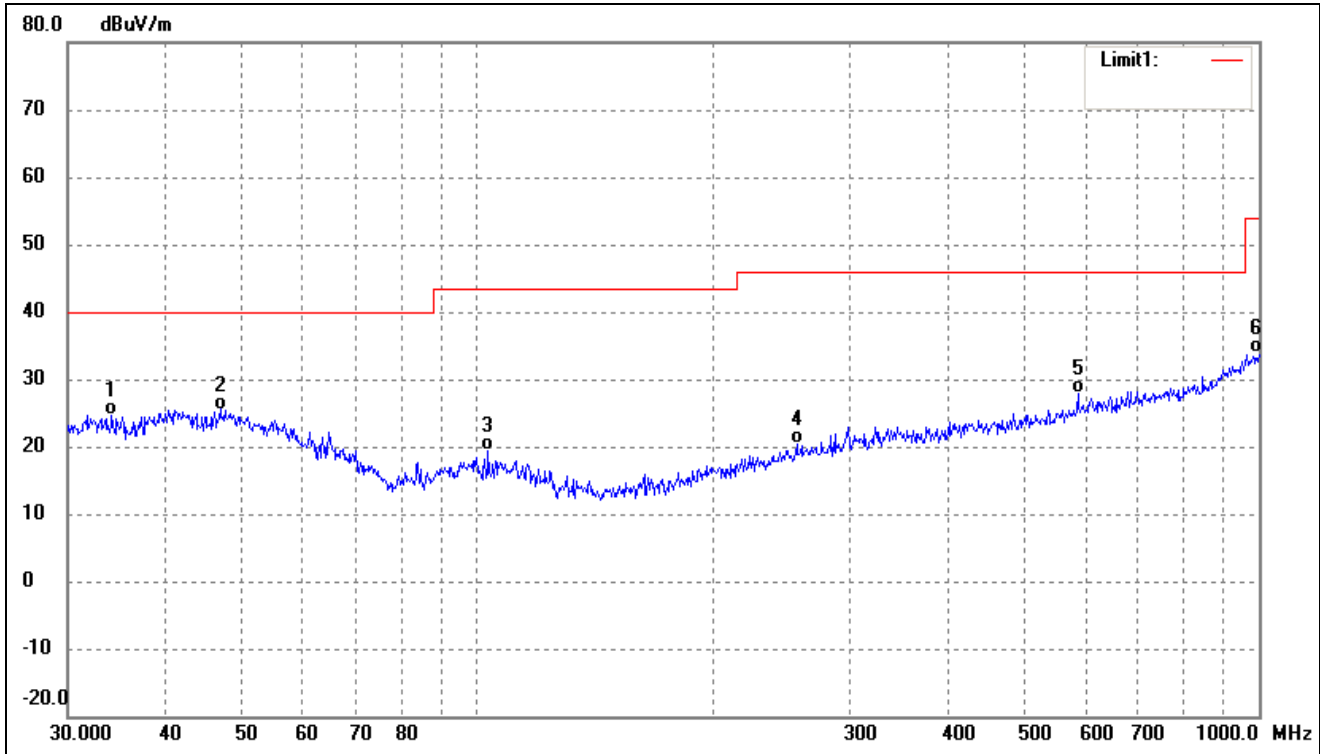

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	34.1561	34.39	-9.78	24.61	40.00	-15.39	68	100	QP
2	46.9948	33.62	-8.12	25.50	40.00	-14.50	94	100	QP
3	103.4421	33.90	-14.64	19.26	43.50	-24.24	51	100	QP
4	256.5211	31.49	-11.03	20.46	46.00	-25.54	99	100	QP
5	586.8437	31.98	-4.13	27.85	46.00	-18.15	52	100	QP
6	1000.0000	29.96	4.04	34.00	54.00	-20.00	267	100	QP

*Spurious Emissions Above 1GHz*

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2403MHz							
2403	105.73	-7.25	98.48	114	-15.52	H	PK
2403	94.97	-7.25	87.72	94	-6.28	H	AV
4806	61.39	-3.92	57.47	74	-16.53	H	PK
4806	44.95	-3.92	41.03	54	-12.97	H	AV
7209	51.83	1.41	53.24	74	-20.76	H	PK
7209	40.09	1.41	41.50	54	-12.50	H	AV
2403	89.09	-7.25	81.84	114	-32.16	V	PK
2403	85.60	-7.25	78.35	94	-15.65	V	AV
4806	61.89	-3.92	57.97	74	-16.03	V	PK
4806	43.79	-3.92	39.87	54	-14.13	V	AV
7209	48.48	1.41	49.89	74	-24.11	V	PK
7209	40.45	1.41	41.86	54	-12.14	V	AV
Middle Channel-2441MHz							
2441	102.57	-7.08	95.49	114	-18.51	H	PK
2441	93.33	-7.08	86.25	94	-7.75	H	AV
4882	61.08	-3.45	57.63	74	-16.37	H	PK
4882	44.96	-3.45	41.51	54	-12.49	H	AV
7323	50.85	1.39	52.24	74	-21.76	H	PK
7323	38.92	1.39	40.31	54	-13.69	H	AV
2441	89.76	-7.08	82.68	114	-31.32	V	PK
2441	88.33	-7.08	81.25	94	-12.75	V	AV
4882	62.51	-3.45	59.06	74	-14.94	V	PK
4882	42.73	-3.45	39.28	54	-14.72	V	AV
7323	50.88	1.39	52.27	74	-21.73	V	PK
7323	39.32	1.39	40.71	54	-13.29	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2480MHz							
2480	100.38	-6.79	93.59	114	-20.41	H	PK
2480	89.85	-6.79	83.06	94	-10.94	H	AV
4960	62.79	-3.45	59.34	74	-14.66	H	PK
4960	44.71	-3.45	41.26	54	-12.74	H	AV
7440	50.80	1.45	52.25	74	-21.75	H	PK
7440	41.24	1.45	42.69	54	-11.31	H	AV
2480	88.46	-6.79	81.67	114	-32.33	V	PK
2480	85.65	-6.79	78.86	94	-15.14	V	AV
4960	62.74	-3.45	59.29	74	-14.71	V	PK
4960	44.94	-3.45	41.49	54	-12.51	V	AV
7440	52.29	1.45	53.74	74	-20.26	V	PK
7440	42.29	1.45	43.74	54	-10.26	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz..*

## 5. Out of Band Emissions

---

### 5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.


### 5.3 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

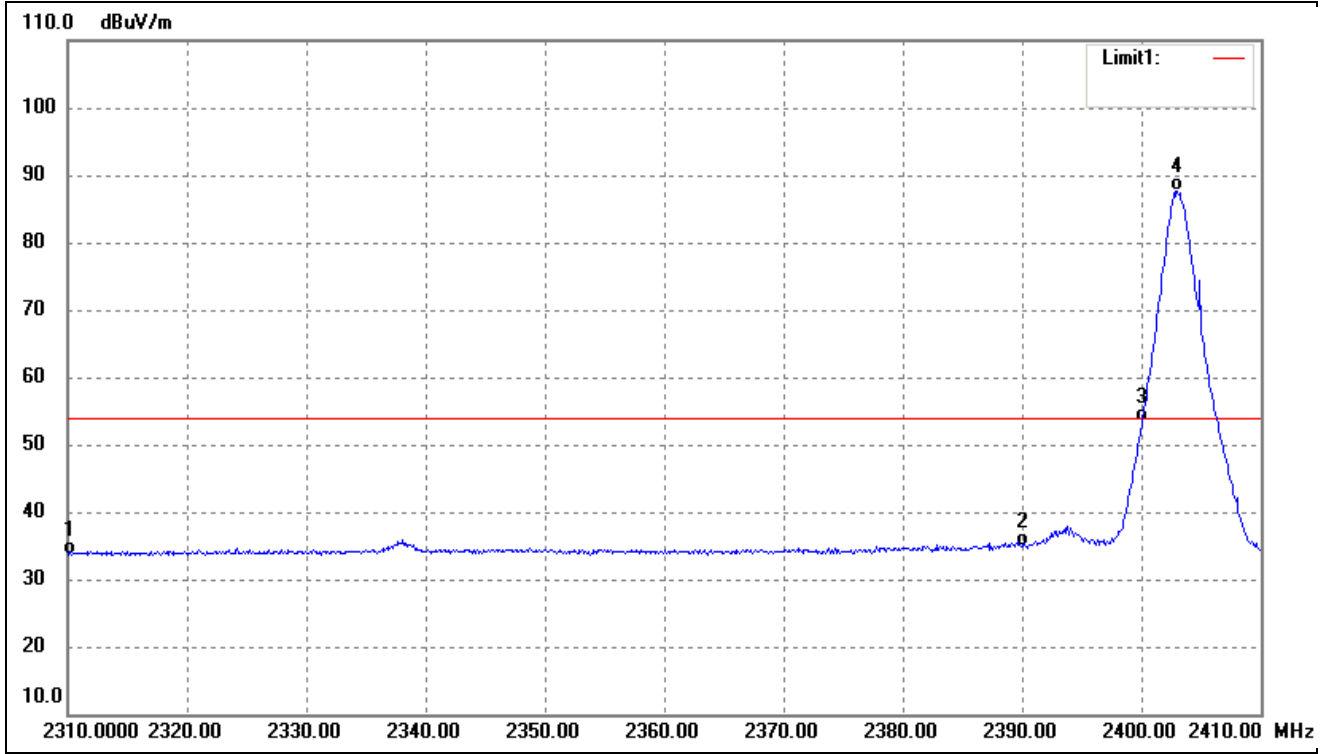

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.42	-7.78	33.64	54.00	-20.36	Ave Detector
	2310.000	53.34	-7.78	45.56	74.00	-28.44	Peak Detector
2	2390.000	42.17	-7.32	34.85	54.00	-19.15	Ave Detector
	2337.900	69.06	-7.62	61.44	74.00	-12.56	Peak Detector
3	2400.000	60.53	-7.26	53.27	54.00	-0.73	Ave Detector
	2390.000	71.37	-7.32	64.05	74.00	-9.95	Peak Detector
4	2403.000	94.97	-7.25	87.72	/	/	Ave Detector
	2403.000	105.73	-7.25	98.48	/	/	Peak Detector

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

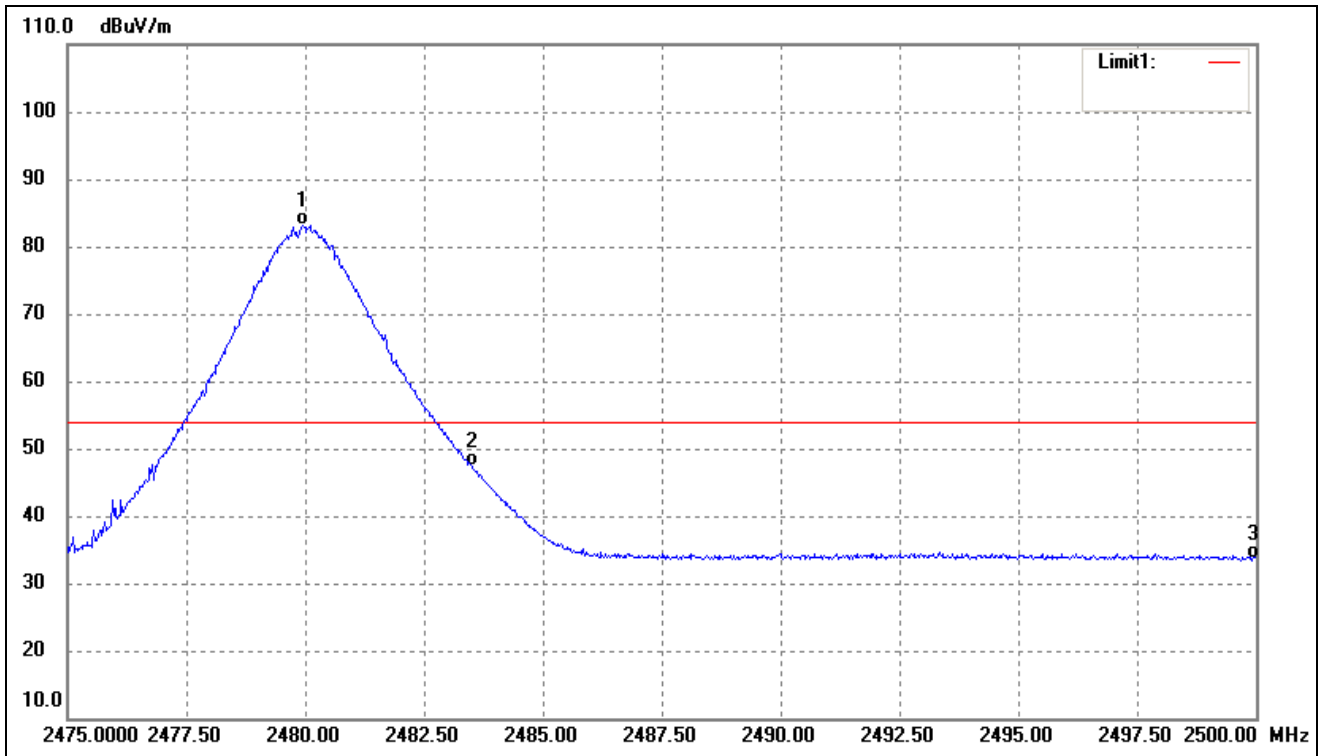

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.950	89.85	-6.79	83.06	/	/	Ave Detector
	2479.700	100.38	-6.79	93.59	/	/	Peak Detector
2	2483.500	54.03	-6.77	47.26	54.00	-6.74	Ave Detector
	2483.500	77.71	-6.77	70.94	74.00	-3.06	Peak Detector
3	2500.000	40.30	-6.67	33.63	54.00	-20.37	Ave Detector
	2500.000	60.89	-6.67	54.22	74.00	-19.78	Peak Detector

## 6. Emission Bandwidth

---

### 6.1 Standard Applicable

According to 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW  $\geq$ 1% 20dB Bandwidth, VBW  $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold




All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

### 6.3 Summary of Test Results/Plots

Test Channel	20dB Bandwidth(MHz)
Low Channel	1.347
Middle Channel	1.336
High Channel	1.354

*Please refer to the following test plots*

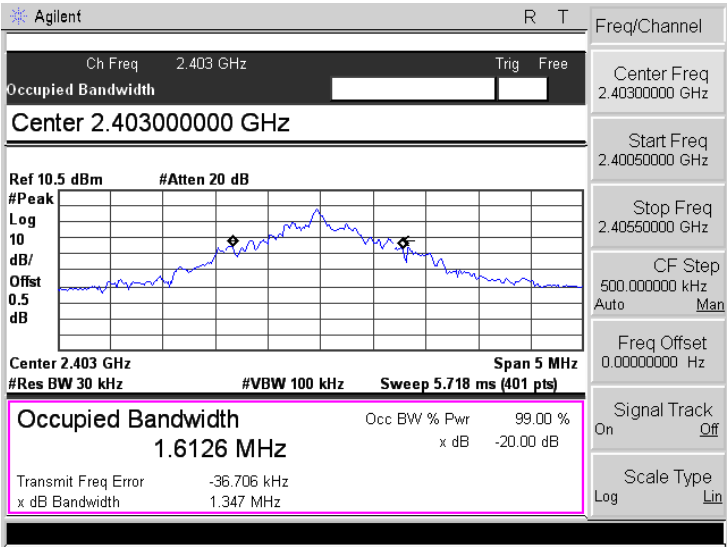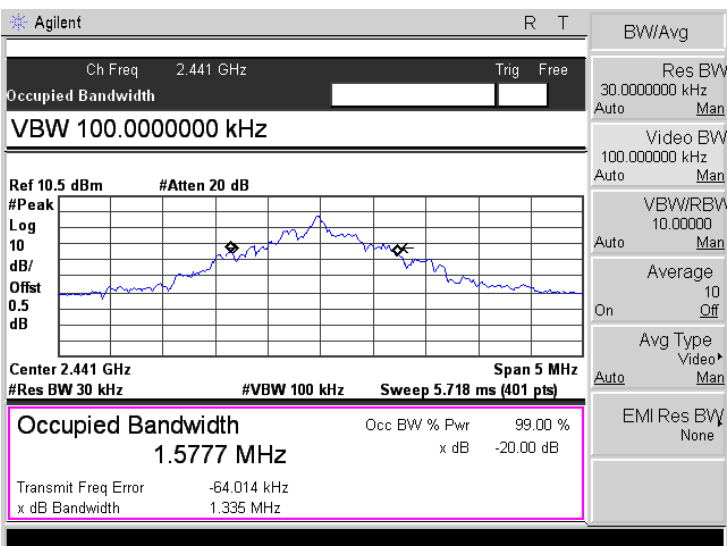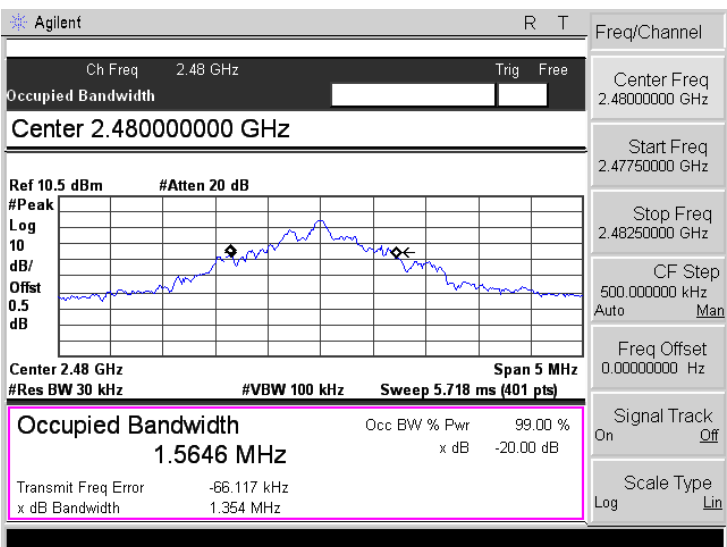

<p>Low Channel</p>	 <p>Agilent R T</p> <p>Ch Freq 2.403 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.40300000 GHz</b></p> <p>Ref 10.5 dBm #Atten 20 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offset</p> <p>0.5</p> <p>dB</p> <p>Center 2.403 GHz Span 5 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5.718 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>1.6126 MHz</b> x dB -20.00 dB</p> <p>Transmit Freq Error -36.706 kHz</p> <p>x dB Bandwidth 1.347 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.40300000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.40550000 GHz</p> <p>CF Step 500.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>Middle Channel</p>	 <p>Agilent R T</p> <p>Ch Freq 2.441 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>VBW 100.000000 kHz</b></p> <p>Ref 10.5 dBm #Atten 20 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offset</p> <p>0.5</p> <p>dB</p> <p>Center 2.441 GHz Span 5 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5.718 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>1.5777 MHz</b> x dB -20.00 dB</p> <p>Transmit Freq Error -64.014 kHz</p> <p>x dB Bandwidth 1.335 MHz</p> <p>BW/Avg</p> <p>Res BW 30.00000000 kHz Auto Man</p> <p>Video BW 100.000000 kHz Auto Man</p> <p>VBW/RBW 10.000000 Auto Man</p> <p>Average 10 On Off</p> <p>Avg Type Video Auto Man</p> <p>EMI Res BW None</p>
<p>High Channel</p>	 <p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.48000000 GHz</b></p> <p>Ref 10.5 dBm #Atten 20 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offset</p> <p>0.5</p> <p>dB</p> <p>Center 2.48 GHz Span 5 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5.718 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>1.5646 MHz</b> x dB -20.00 dB</p> <p>Transmit Freq Error -66.117 kHz</p> <p>x dB Bandwidth 1.354 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47750000 GHz</p> <p>Stop Freq 2.48250000 GHz</p> <p>CF Step 500.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>


## 7. Conducted Emissions

### 7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 7.2 Basic Test Setup Block Diagram

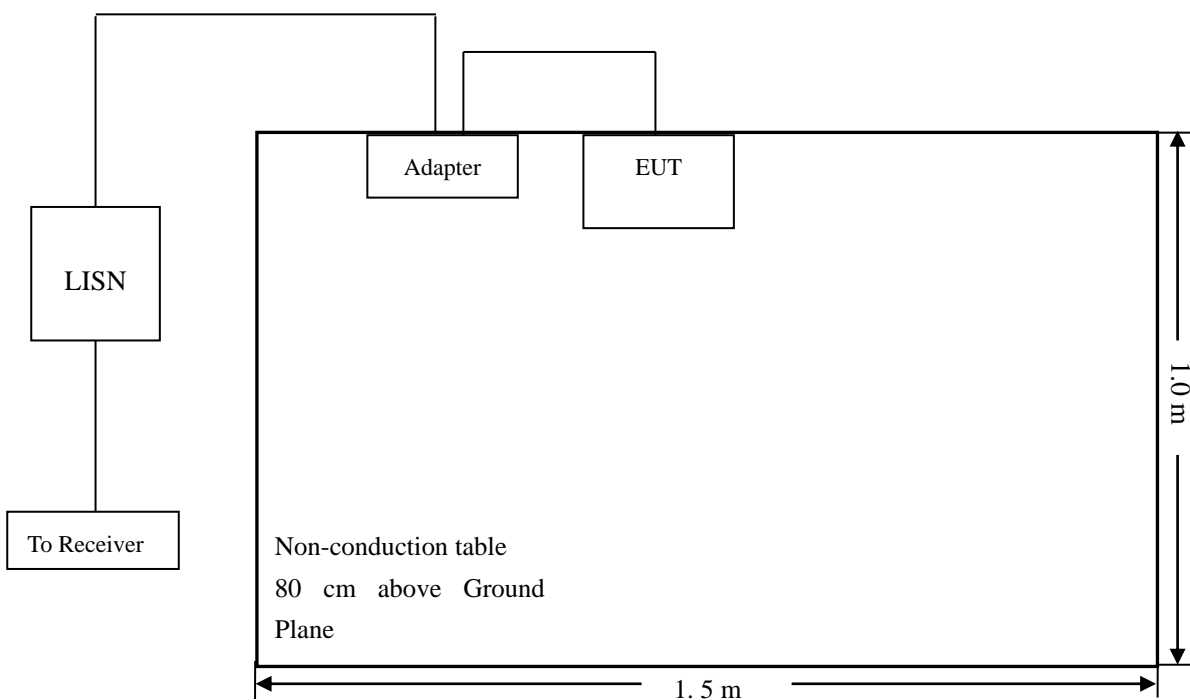

### 7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
 Stop Frequency ..... 30 MHz  
 Sweep Speed ..... Auto  
 IF Bandwidth..... 10 kHz  
 Quasi-Peak Adapter Bandwidth ..... 9 kHz  
 Quasi-Peak Adapter Mode ..... Normal

### 7.4 Summary of Test Results/Plots

Not applicable

\*\*\*\*\* END OF REPORT \*\*\*\*\*