

# TEST REPORT

Reference No..... : WTX21X11132003W-1  
FCC ID ..... : Z2G-PERIMICE-611R  
Applicant ..... : Perixx Computer GmbH  
Address ..... : Heerdter Landstrasse 189e 40549 Düsseldorf, Germany  
Product Name ..... : Receiver for Wireless Multi-Device Ergonomic Portable Mouse  
Test Model. .... : PERIMICE-611  
Standards ..... : FCC Part 15.249  
Date of Receipt sample .... : Nov. 30, 2021  
Date of Test..... : Nov. 30, 2021 to Dec. 14, 2021  
Date of Issue ..... : Dec. 14, 2021  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Jason Su / RF Manager



Silin Chen / Manager

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	8
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>3. ANTENNA REQUIREMENTS.....</b>	<b>11</b>
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT.....	11
<b>4. RADIATED EMISSIONS.....</b>	<b>12</b>
4.1 STANDARD APPLICABLE.....	12
4.2 TEST PROCEDURE.....	12
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	15
<b>5. OUT OF BAND EMISSIONS.....</b>	<b>19</b>
5.1 STANDARD APPLICABLE.....	19
5.2 TEST PROCEDURE.....	19
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
<b>6. EMISSION BANDWIDTH.....</b>	<b>24</b>
6.1 STANDARD APPLICABLE.....	24
6.2 TEST PROCEDURE.....	24
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	24
<b>7. CONDUCTED EMISSIONS.....</b>	<b>26</b>
7.1 TEST PROCEDURE.....	26
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	26
7.3 TEST RECEIVER SETUP.....	26
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	26
<b>APPENDIX PHOTOGRAPHS.....</b>	<b>29</b>

**Report version**

Version No.	Date of issue	Description
Rev.00	Dec. 14, 2021	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Perixx Computer GmbH  
 Address of applicant: Heerdter Landstrasse 189e 40549 Düsseldorf, Germany

Manufacturer: Perixx Computer GmbH  
 Address of manufacturer: Heerdter Landstrasse 189e 40549 Düsseldorf, Germany

General Description of EUT	
Product Name:	Receiver for Wireless Multi-Device Ergonomic Portable Mouse
Trade Name:	Perixx
Model No.:	PERIMICE-611
Adding Model(s):	/
Rated Voltage:	DC 5V
Battery Capacity	/
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2402MHz-2480MHz
Max. Field Strength:	80.84dBuV/m
Modulation:	GFSK
Quantity of Channels	40
Channel Separation:	2MHz
Antenna Type:	PCB Antenna
Antenna Gain:	0.5dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.249**: Operation within the bands 902-928MHz, 2400-2483.5MHz, 5725-5875MHz, and 24.0-24.25GHz.

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

<b>Test Mode List</b>		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

<b>Test Conditions</b>	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

<b>EUT Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Special Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	EB12648265

**1.6 Measurement Uncertainty**

<b>Measurement uncertainty</b>		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2021-03-19	2023-03-18
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/



<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215(c)	Emission Bandwidth	Compliant

N/A: Not applicable.

### **3. Antenna Requirements**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has a PCB antenna, fulfill the requirement of this section.

## 4. Radiated Emissions

---

### 4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

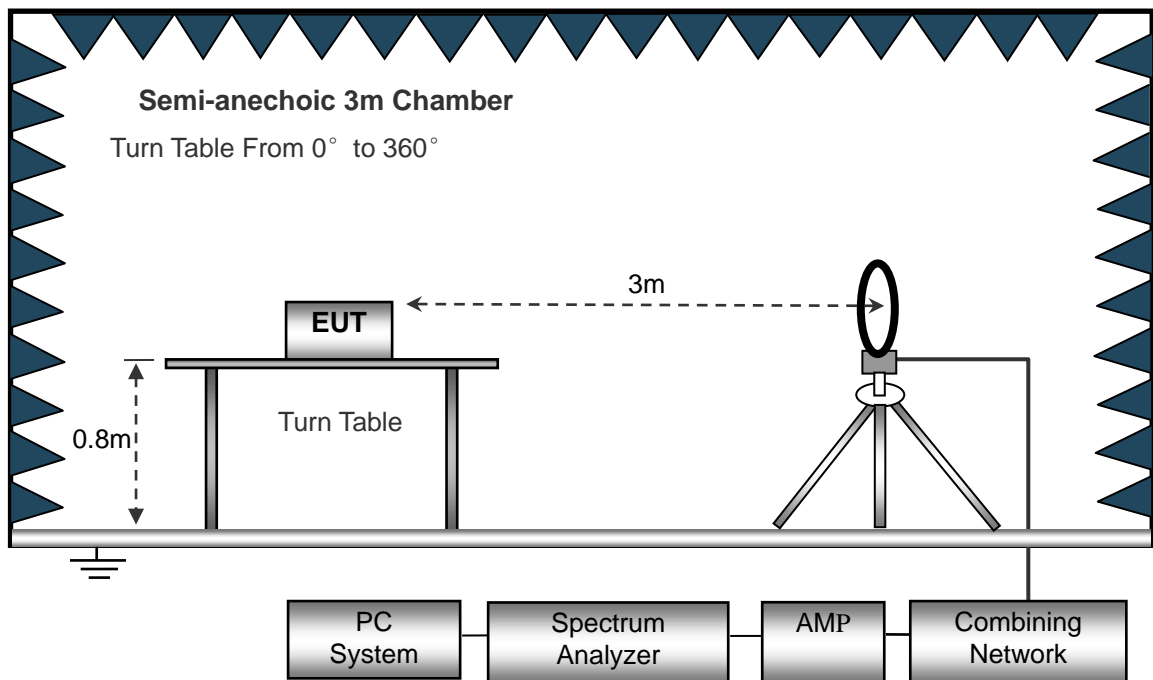

The test setup for emission measurement from 30MHz to 1GHz.

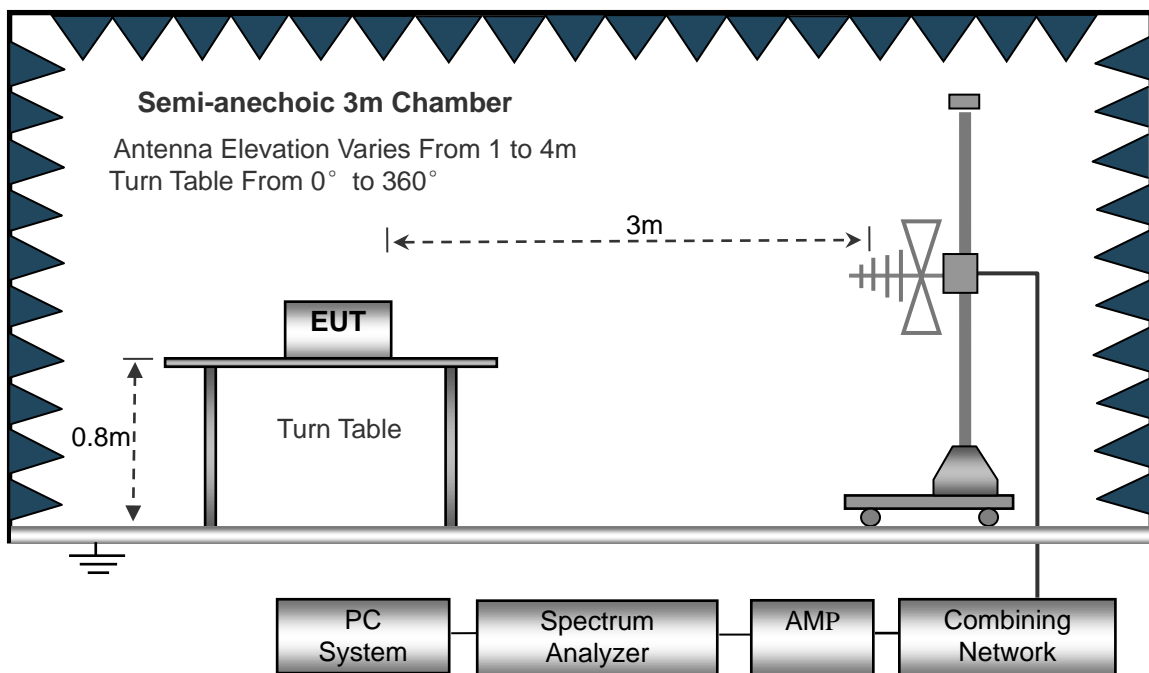

The test setup for emission measurement above 1GHz.

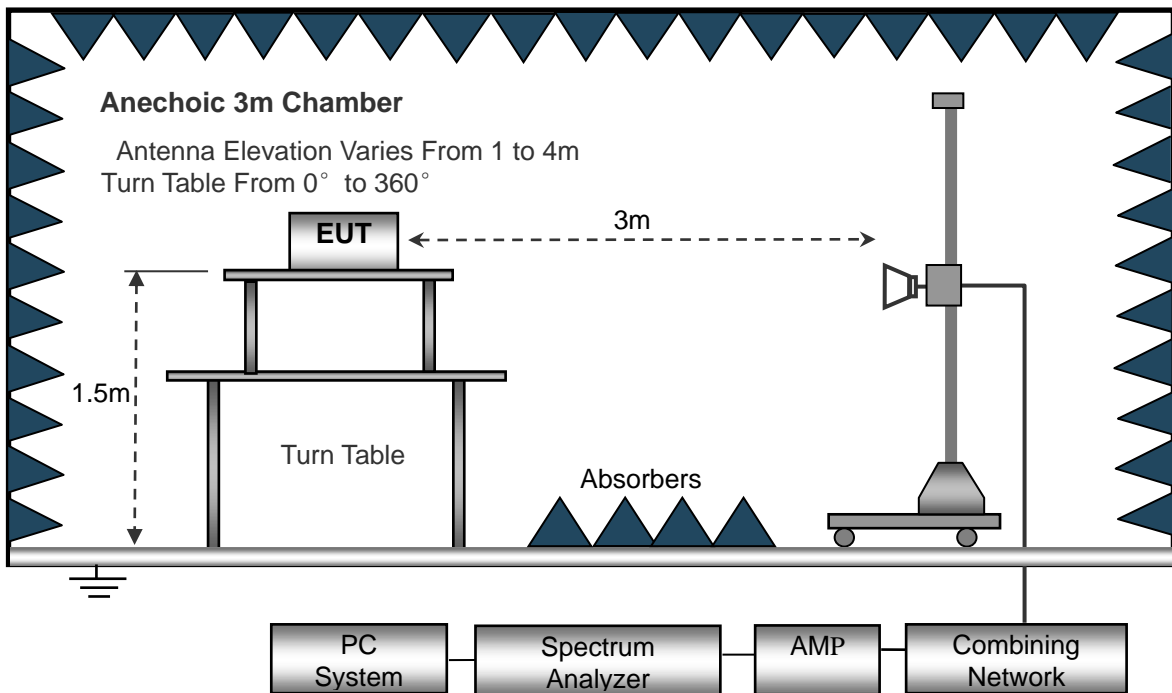

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

### 4.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

➤ Spurious Emissions Below 1GHz


Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

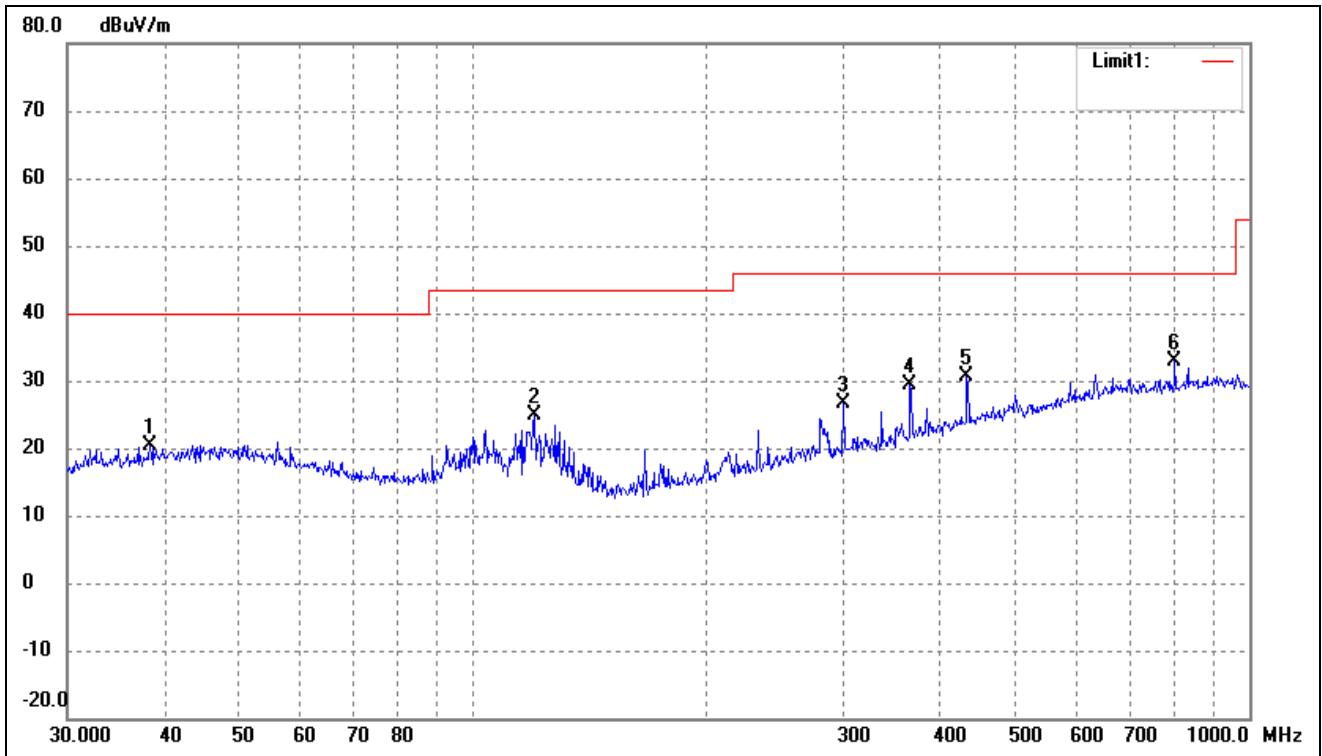

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.3462	27.78	-7.40	20.38	40.00	-19.62	-	-	peak
2	119.8556	34.43	-9.59	24.84	43.50	-18.66	-	-	peak
3	300.3672	33.53	-6.95	26.58	46.00	-19.42	-	-	peak
4	365.5391	34.31	-4.93	29.38	46.00	-16.62	-	-	peak
5	432.5457	33.70	-3.02	30.68	46.00	-15.32	-	-	peak
6	801.7863	30.80	2.10	32.90	46.00	-13.10	-	-	peak



Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

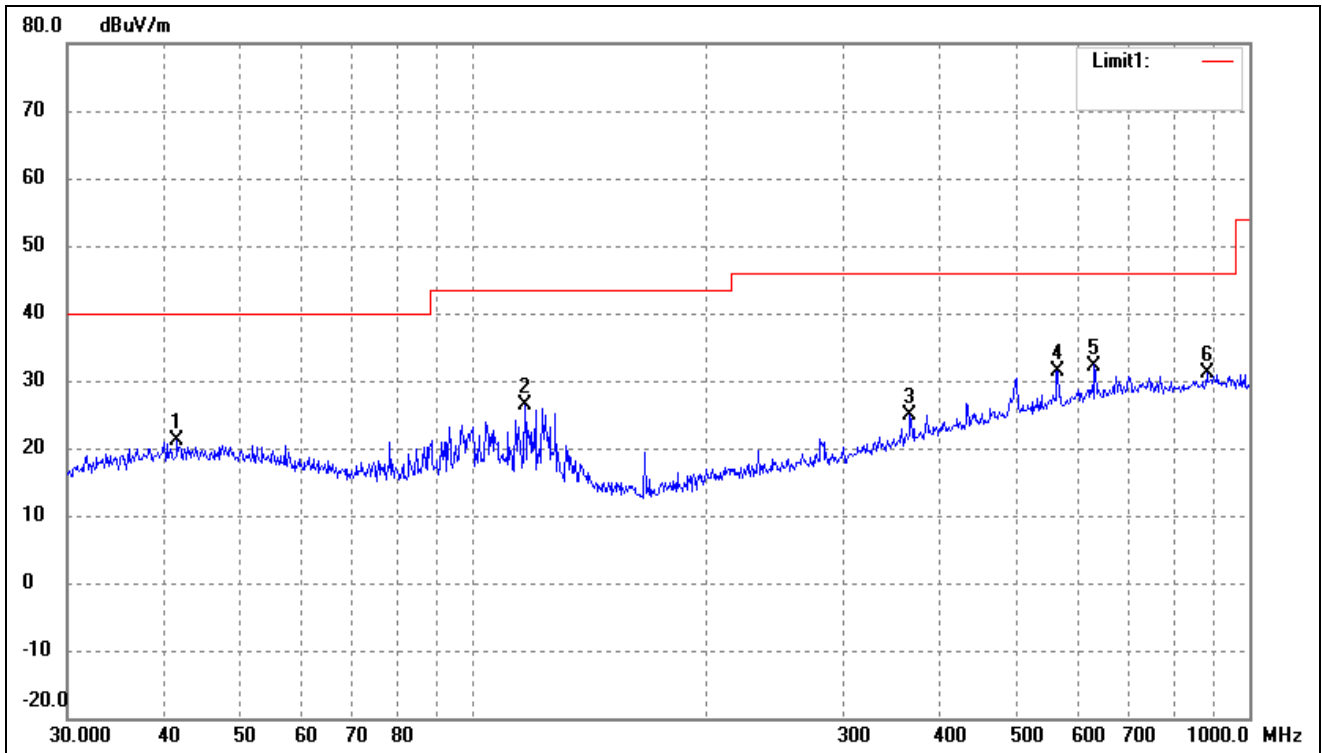

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.5670	28.25	-7.00	21.25	40.00	-18.75	-	-	peak
2	116.5401	35.78	-9.34	26.44	43.50	-17.06	-	-	peak
3	365.5391	29.90	-4.93	24.97	46.00	-21.03	-	-	peak
4	566.6223	31.61	-0.20	31.41	46.00	-14.59	-	-	peak
5	631.6884	31.53	0.72	32.25	46.00	-13.75	-	-	peak
6	881.4067	28.42	2.62	31.04	46.00	-14.96	-	-	peak

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

*Spurious Emissions Above 1GHz*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
2401.700	91.53	-10.69	80.84	114.00	-33.16	H	PK
2402.100	90.34	-10.69	79.65	94.00	-14.35	H	AV
4804.000	59.14	-6.13	53.01	74.00	-20.99	H	PK
7206.000	49.87	-1.64	48.23	74.00	-25.77	H	PK
2402.300	88.57	-10.69	77.88	114.00	-36.12	V	PK
2402.100	87.31	-10.69	76.62	94.00	-17.38	V	AV
4804.000	58.05	-6.13	51.92	74.00	-22.08	V	PK
7206.000	49.43	-1.64	47.79	74.00	-26.21	V	PK
Middle Channel-2440MHz							
2440.340	88.11	-10.63	77.48	114.00	-36.52	H	PK
2439.960	87.13	-10.63	76.50	94.00	-17.50	H	AV
4880.000	60.40	-5.93	54.47	74.00	-19.53	H	PK
4880.030	56.37	-5.93	50.44	54.00	-3.56	H	AV
7320.000	47.71	-1.58	46.13	74.00	-27.87	H	PK
2439.770	88.26	-10.63	77.63	114.00	-36.37	V	PK
2439.960	87.32	-10.63	76.69	94.00	-17.31	V	AV
4880.000	58.15	-5.93	52.22	74.00	-21.78	V	PK
7320.000	48.78	-1.58	47.20	74.00	-26.80	V	PK
High Channel-2480MHz							
2480.250	89.58	-10.58	79.00	114.00	-35.00	H	PK
2480.000	88.64	-10.58	78.06	94.00	-15.94	H	AV
4958.678	58.84	-5.71	53.13	74.00	-20.87	H	PK
7440.000	49.78	-1.52	48.26	74.00	-25.74	H	PK
2480.300	85.80	-10.58	75.22	114.00	-38.78	V	PK
2480.000	84.61	-10.58	74.03	94.00	-19.97	V	AV
4958.678	56.51	-5.71	50.80	74.00	-23.20	V	PK
7440.000	49.54	-1.52	48.02	74.00	-25.98	V	PK

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz..*

## 5. Out of Band Emissions

---

### 5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.


### 5.3 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54dBuV	Pass
	2390.00	<54dBuV	Pass
	2400.00	<54dBuV	Pass
Highest	2483.50	<54dBuV	Pass
	2500.00	<54dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

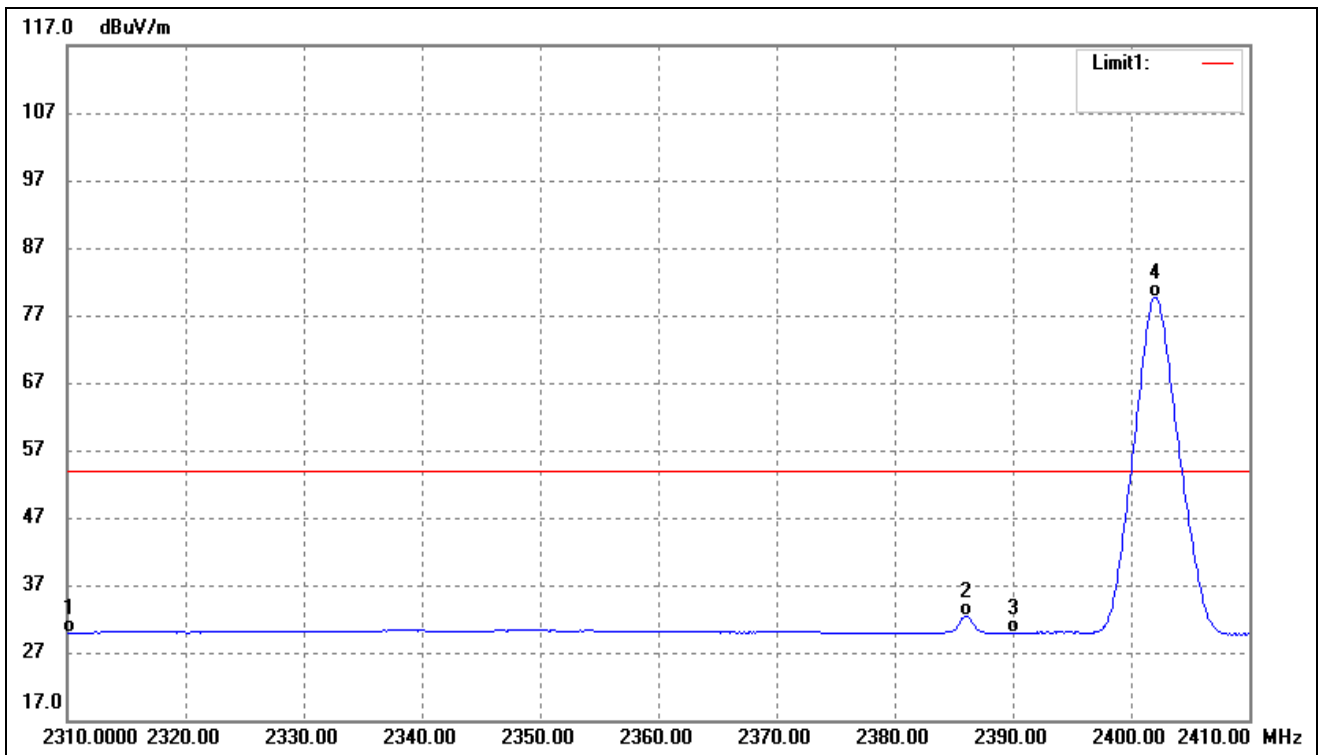

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.75	-10.82	29.93	54.00	-24.07	Ave Detector
	2310.000	52.94	-10.82	42.12	74.00	-31.88	Peak Detector
2	2386.000	43.12	-10.71	32.41	54.00	-21.59	Ave Detector
	2386.100	55.72	-10.71	45.01	74.00	-28.99	Peak Detector
3	2390.000	40.58	-10.70	29.88	54.00	-24.12	Ave Detector
	2390.000	52.51	-10.70	41.81	74.00	-32.19	Peak Detector
4	2402.100	90.34	-10.69	79.65	/	/	Ave Detector
	2401.700	91.53	-10.69	80.84	/	/	Peak Detector


Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

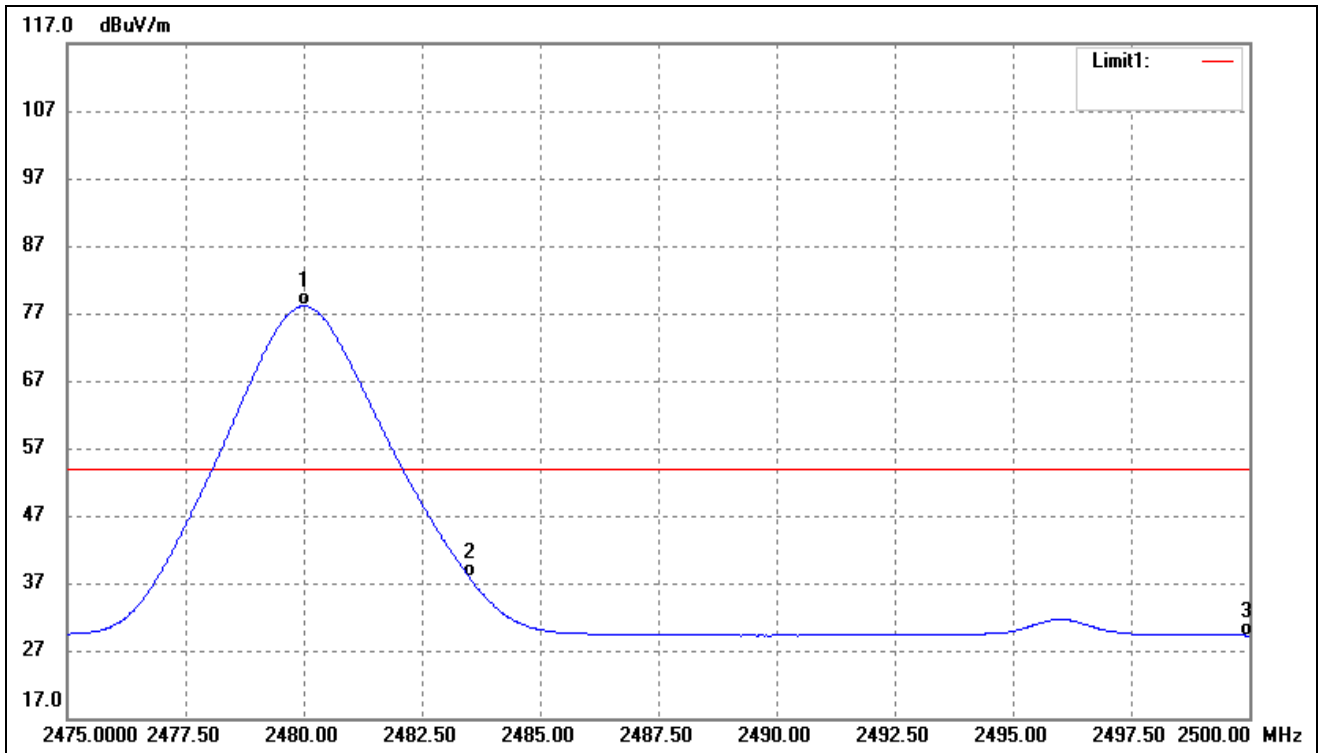

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	88.64	-10.58	78.06	/	/	Ave Detector
	2480.250	89.58	-10.58	79.00	/	/	Peak Detector
2	2483.500	48.41	-10.58	37.83	54.00	-16.17	Ave Detector
	2483.500	56.06	-10.58	45.48	74.00	-28.52	Peak Detector
3	2500.000	39.80	-10.55	29.25	54.00	-24.75	Ave Detector
	2500.000	52.22	-10.55	41.67	74.00	-32.33	Peak Detector


Band edge

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

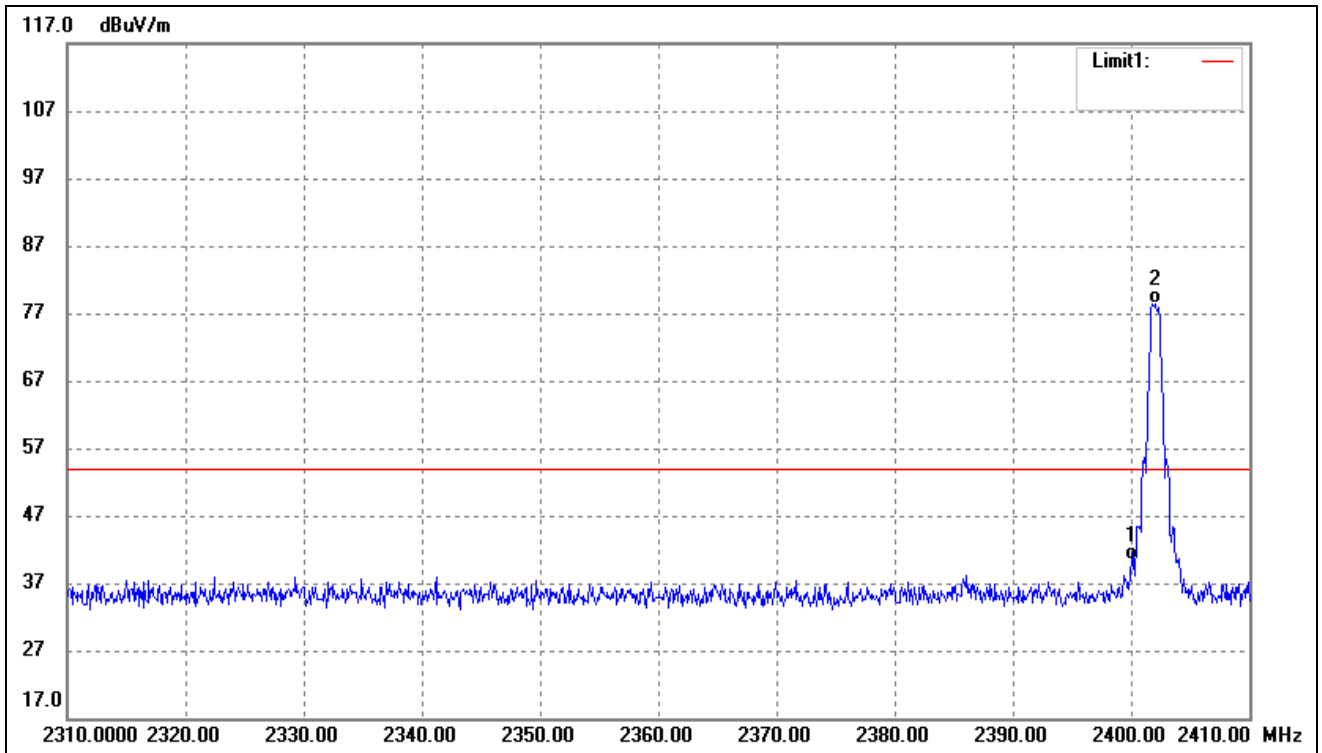

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	51.11	-10.69	40.42	54.00	-13.58	Ave Detector
	2400.000	53.18	-10.69	42.49	74.00	-31.51	Peak Detector
2	2402.000	89.16	-10.69	78.47	/	/	Ave Detector
	2402.000	89.25	-10.69	78.56	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

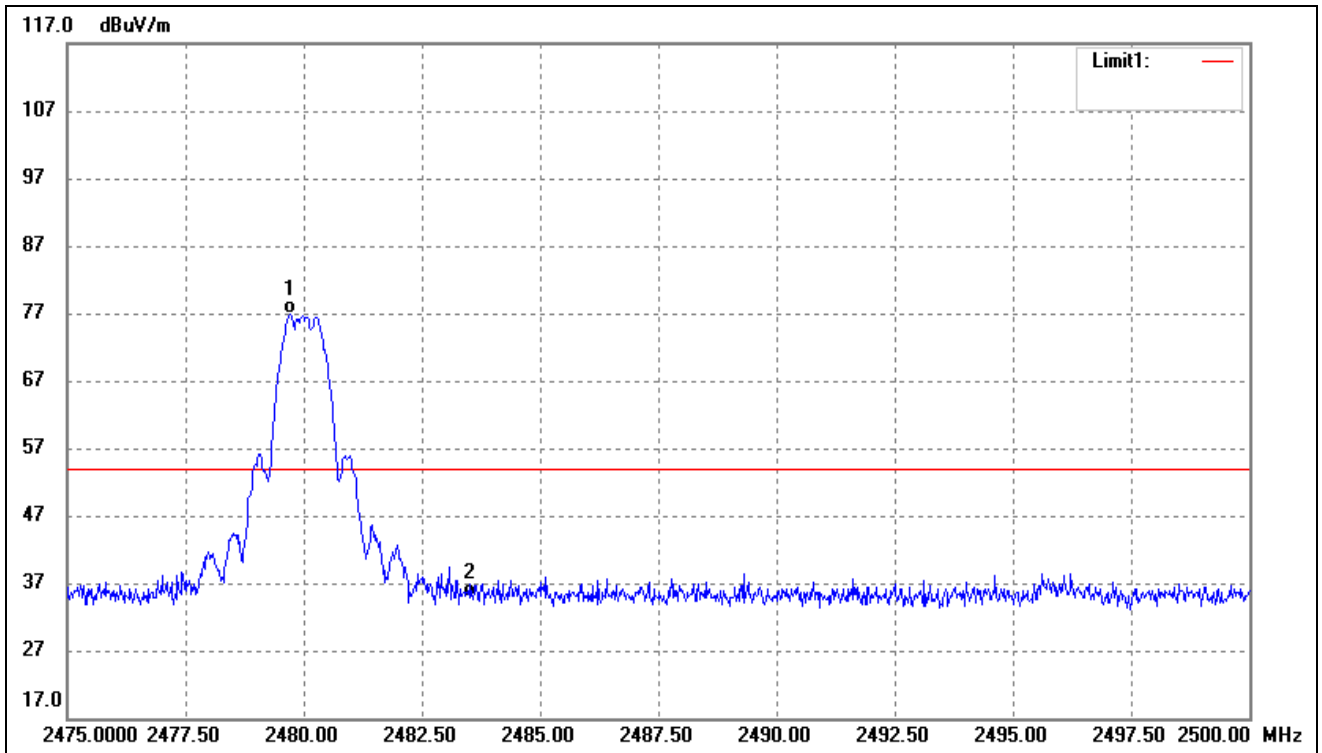

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.725	87.43	-10.58	76.85	/	/	Ave Detector
	2479.700	87.53	-10.58	76.95	/	/	Peak Detector
2	2483.500	45.35	-10.58	34.77	54.00	-19.23	Ave Detector
	2483.500	47.81	-10.58	37.23	74.00	-36.77	Peak Detector

## 6. Emission Bandwidth

---

### 6.1 Standard Applicable

According to 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW  $\geq$  1% 20dB Bandwidth, VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

### 6.3 Summary of Test Results/Plots

Test Channel	20dB Bandwidth(kHz)
Low Channel	1260
Middle Channel	1265
High Channel	1265

*Please refer to the following test plots:*



<p>Low Channel</p>	<p>Agilent R T Meas Setup</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.40200000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 1.1759 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error 16.593 kHz x dB Bandwidth 1.260 MHz</p> <p>Avg Number 10 On Off</p> <p>Avg Mode Repeat Exp</p> <p>Max Hold On Off</p> <p>Occ BW % Pwr 99.00 %</p> <p>OBW Spar 3.00000000 MHz</p> <p>x dB -20.00 dB</p> <p>Optimize Ref Level</p>
<p>Middle Channel</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.44000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 1.1862 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error 18.478 kHz x dB Bandwidth 1.265 MHz</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43850000 GHz</p> <p>Stop Freq 2.44150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>High Channel</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.48000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 1.2044 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error 18.822 kHz x dB Bandwidth 1.265 MHz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

## 7. Conducted Emissions


### 7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

### 7.2 Basic Test Setup Block Diagram

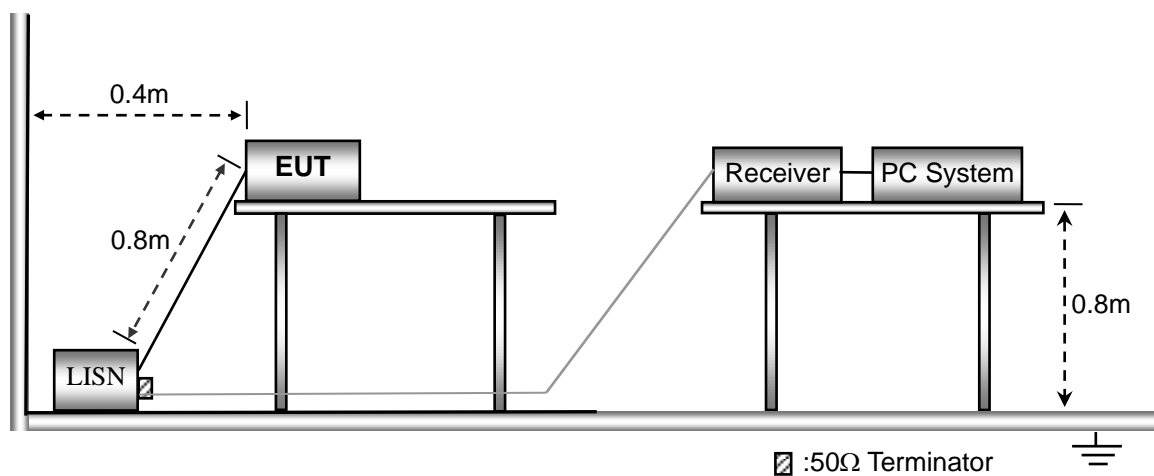


### 7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150kHz
Stop Frequency .....	30MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth .....	9kHz
Quasi-Peak Adapter Mode .....	Normal


### 7.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

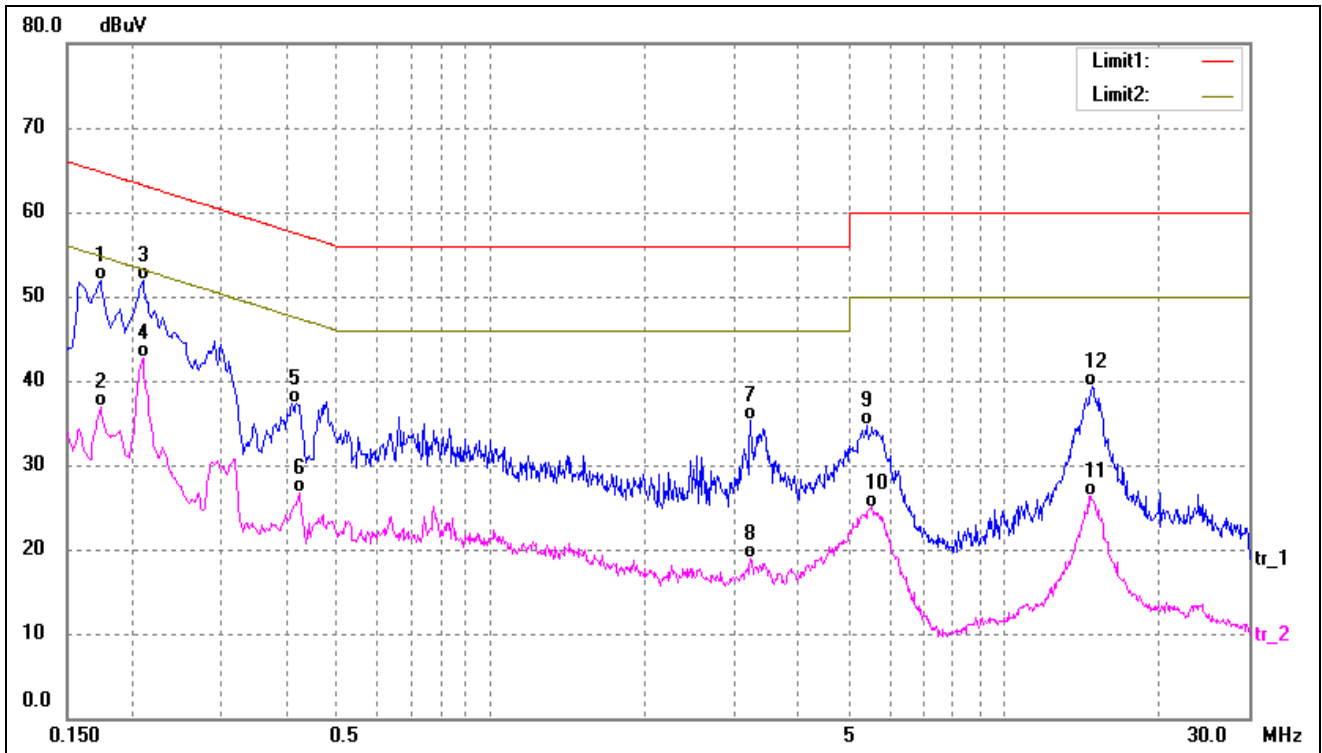

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	41.47	10.37	51.84	64.76	-12.92	QP
2	0.1740	26.45	10.37	36.82	54.76	-17.94	AVG
3	0.2100	41.59	10.37	51.96	63.20	-11.24	QP
4*	0.2100	32.36	10.37	42.73	53.20	-10.47	AVG
5	0.4100	27.00	10.29	37.29	57.65	-20.36	QP
6	0.4260	16.39	10.28	26.67	47.33	-20.66	AVG
7	3.2139	25.18	10.08	35.26	56.00	-20.74	QP
8	3.2139	8.80	10.08	18.88	46.00	-27.12	AVG
9	5.4060	24.72	9.99	34.71	60.00	-25.29	QP
10	5.5620	15.01	9.99	25.00	50.00	-25.00	AVG
11	14.8260	16.26	10.14	26.40	50.00	-23.60	AVG
12	14.8420	29.24	10.14	39.38	60.00	-20.62	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

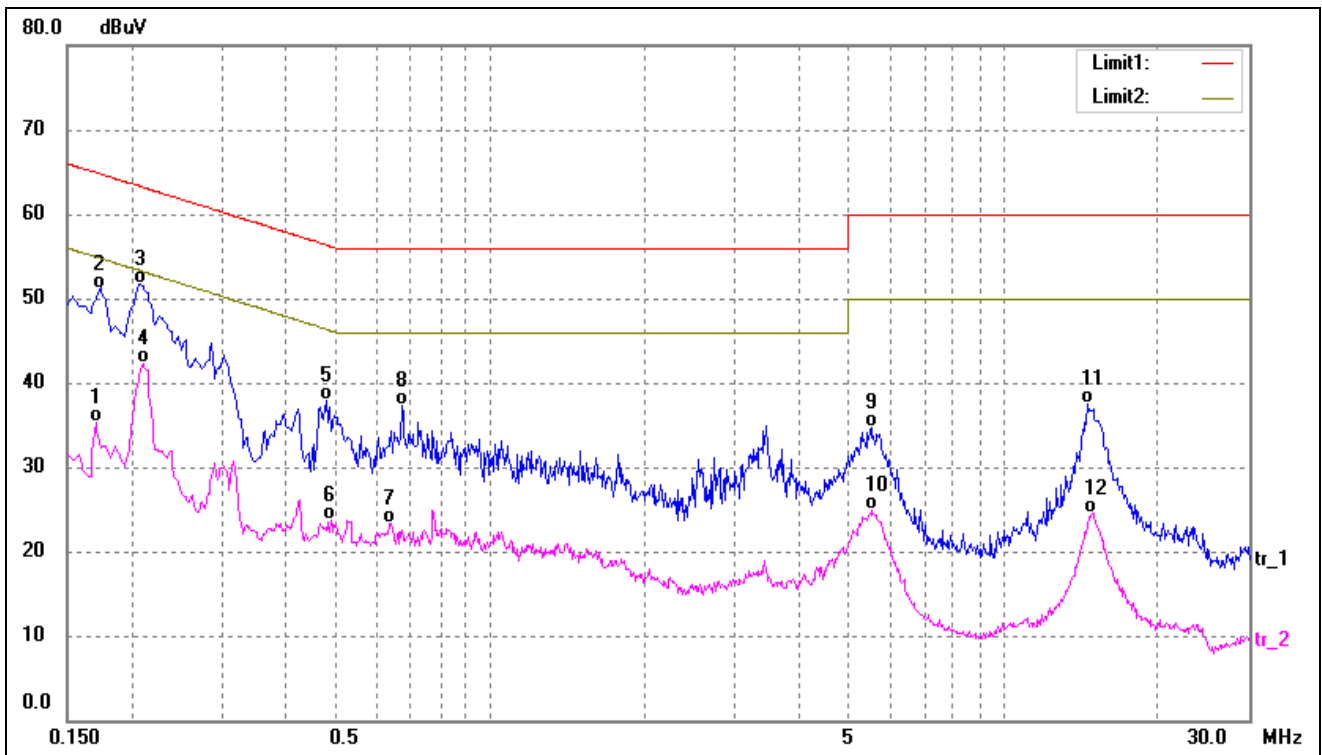

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	24.94	10.37	35.31	54.96	-19.65	AVG
2	0.1740	40.83	10.37	51.20	64.76	-13.56	QP
3	0.2060	41.33	10.37	51.70	63.36	-11.66	QP
4*	0.2100	31.95	10.37	42.32	53.20	-10.88	AVG
5	0.4780	27.54	10.27	37.81	56.37	-18.56	QP
6	0.4900	13.47	10.26	23.73	46.17	-22.44	AVG
7	0.6380	13.06	10.34	23.40	46.00	-22.60	AVG
8	0.6740	26.85	10.36	37.21	56.00	-18.79	QP
9	5.5180	24.79	9.99	34.78	60.00	-25.22	QP
10	5.5580	14.87	9.99	24.86	50.00	-25.14	AVG
11	14.5500	27.31	10.12	37.43	60.00	-22.57	QP
12	14.8900	14.28	10.15	24.43	50.00	-25.57	AVG

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***