

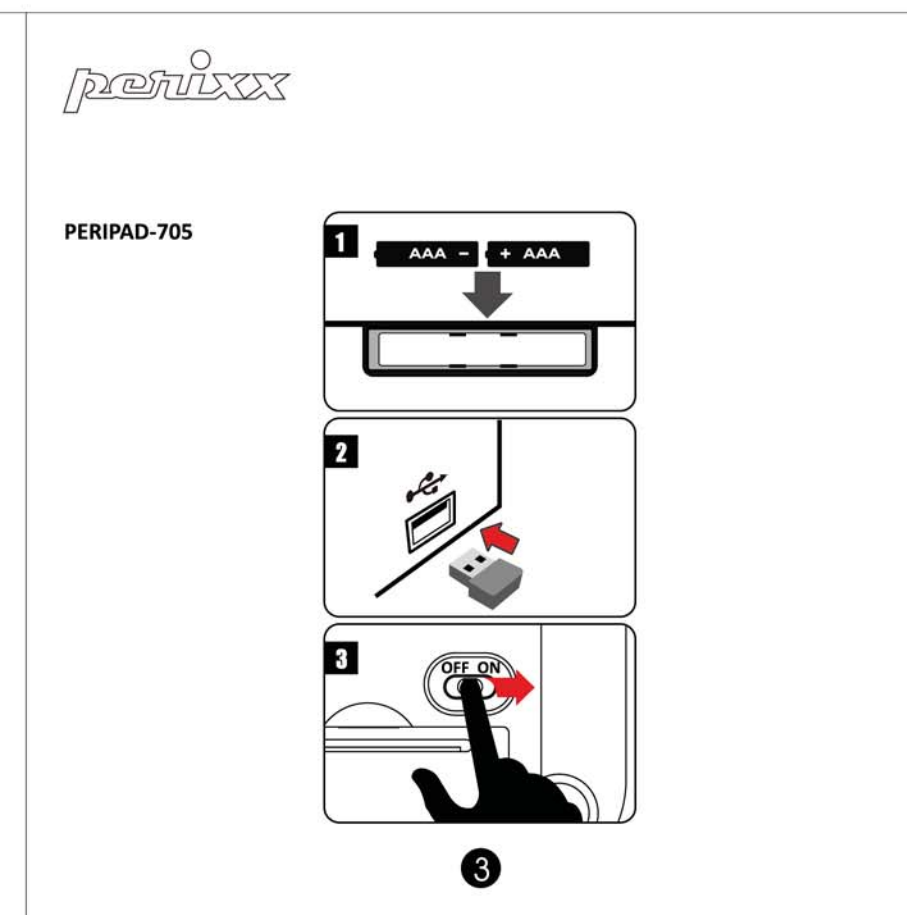


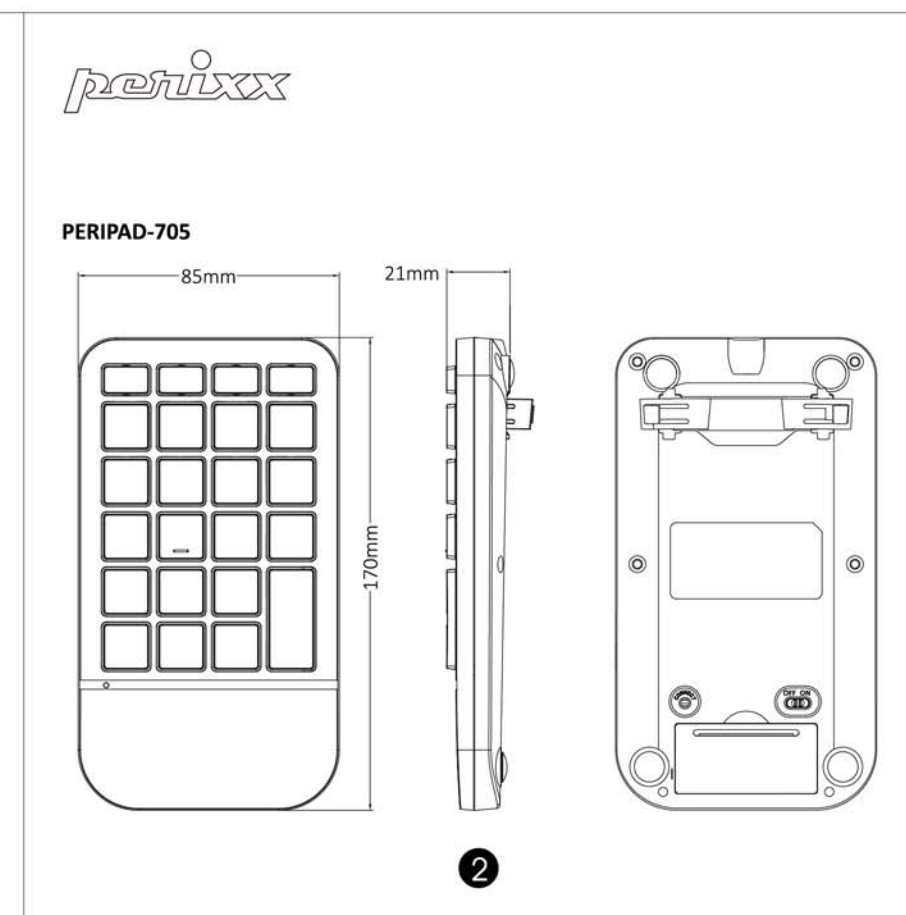

正面

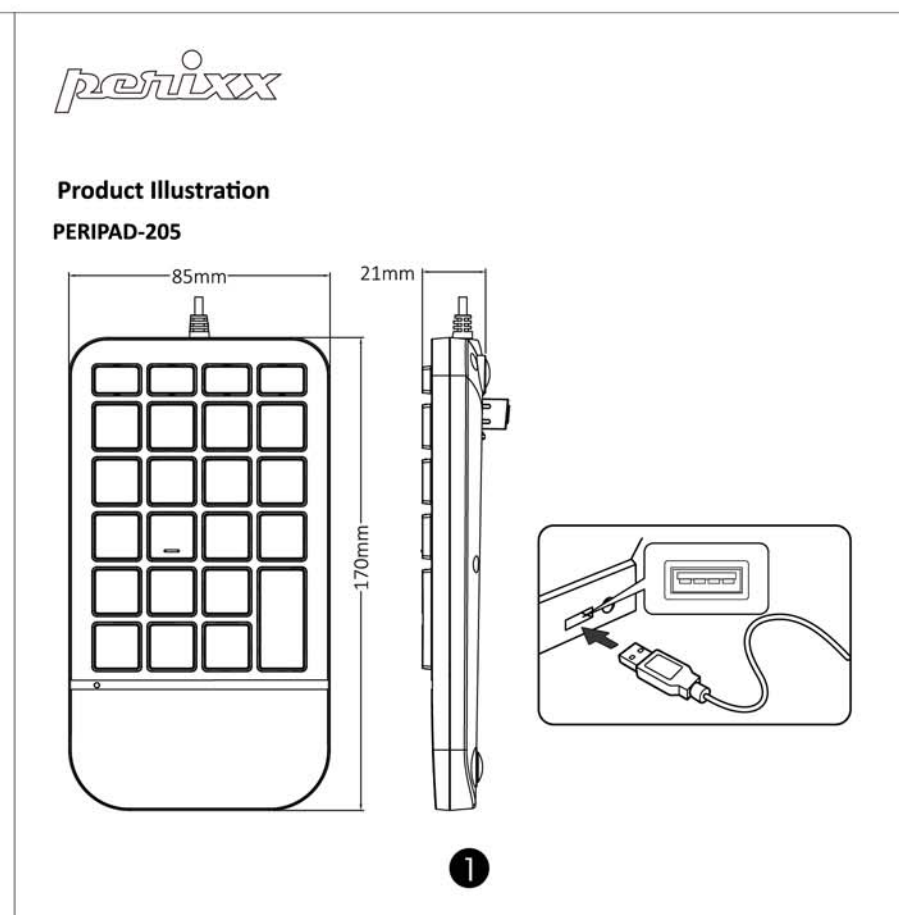

English(US/UK)

Caution

- The manufacturer and re-sellers are not responsible for any technical malfunctions, damage, or personal injury incurred by:
- Any attempt to dismantle, change or modify the product in any manner
- Malfunction or damage due to misuse or improper alteration or repair:
- Malfunction or damage caused by external influence such as falling
- Malfunction or damage is caused by a fire, salt, gas, earthquake, lightning, wind, water, or other natural calamities, or abnormal voltage.
- Malfunction or damage is caused by other devices connected to the products.
- Malfunction or damage is caused by high temperature, humid, greasy, dusty and hazardous environment.

You are cautioned that changes or modifications not expressly approved by Perixx Computer GmbH could void your authority to operate the equipment.

All brand names, trademarks and logos are the properties of their respective owners.

Please Note: Long-term repetitive use of any keyboard and mouse could cause injury to user. Perixx recommends users to avoid excessive use of this or any keyboard and mouse.

English(US/UK)

Specification

PERIPAD-205		PERIPAD-705	
Interface	USB2.0	Interface	2.4G
Size	170*85*21mm	Size	170*85*21mm
Cable Length	1 M	Input Current	3V / ≤10mA
Weight	168g	Weight	135g
Material	ABS	Material	ABS
OS requirement	Win XP / above	OS requirement	Win XP / above
Key number	23	Key Type	Membrane
Actuation distance	1.30mm	Actuation distance	1.30mm
Total travel distance	2.2±0.2mm	Total travel distance	2.2±0.2mm
Durability	10 million keypresses	Durability	10 million keypresses

English(US/UK)

Important Safety Instructions

- Avoid Dropping.
- Do not disassemble.
- Do not expose to liquids.
- This product is suitable for moderate climates only.
- The maximum ambient temperature during use of this product must not exceed 40 degree
- Open flame sources, such as candles, must not be placed on this product.
- Only use a dry cloth or brush to clean this product.

PERIPAD-705

LED Indicator	Status
Flashing red	Power On
Flashing red	Pairing
Flashing red	Low voltage

Deutsch (DE)

Bitte beachten Sie:

- Der Hersteller sowie die Wiederverkäufer sind nicht verantwortlich für technische Defekte, Schäden oder mögliche Verletzungen verursacht durch:
- Versuche, den Artikel zu demontieren oder in jeglicher Form zu verändern
- Zweckentfremdung oder eigenes Reparieren
- Fremdeinwirkung wie z.B. Sturz oder Schlag
- Feuer, Gas, Erdbeben, Blitz, Wind, Wasser, Überspannung oder jede andere Form von äußerer Gewalt
- Andere mit der Tastatur verbundene Geräte
- Zu hohe Temperaturen oder eine feuchte, staubige oder gefährliche Umgebung

Der Benutzer wird darauf hingewiesen, dass Änderungen oder Modifizierungen an der Gerätschaft, die von Perixx Computer GmbH nicht ausdrücklich genehmigt sind, die Erlaubnis des Benutzers zur Inbetriebnahme des Gerätes außer Kraft setzen könnte.

Alle Markenamen, Warenzeichen und Logos sind Eigentum von Perixx.

Die übermäßige Langzeit-Verwendung jeder Tastatur und Maus kann zu Verletzungen führen. Perixx empfiehlt Benutzern den übermäßigen Gebrauch von jeglicher Tastatur und Maus zu vermeiden.



背面

Deutsch (DE)

Technische Daten

PERIPAD-205		PERIPAD-705	
Schnittstelle	USB2.0	Schnittstelle	2.4G
Abmessung	170*85*21mm	Abmessung	170*85*21mm
Kabellänge	1M	Aktuelle Anzeige	3V / ≤10mA
Gewicht	168g	Gewicht	135g
Material	ABS	Material	ABS
Betriebssystem	Win XP / above	Betriebssystem	Win XP / above
Tastenzahl	23	Tastenzahl	23
Tasten Typ	Membran	Tasten Typ	Membran
Tastendruck-Signal	1.30mm	Tastendruck-Signal	1.30mm
Gesamter Tastenhub	2.2±0.2mm	Gesamter Tastenhub	2.2±0.2mm
Lebensdauer	10 Millionen	Lebensdauer	10 Millionen
	Tastenschläge		Tastenschläge

Deutsch (DE)

Wichtige Sicherheitsanweisungen

- Lassen Sie das Gerät nicht fallen
- Bauen Sie das Gerät nicht auseinander
- Setzen Sie das Gerät keiner Flüssigkeit aus
- Das Gerät ist für moderates Klima zur privaten Benutzung konzipiert
- Die maximale Umgebungstemperatur während der Verwendung dieses Produktes darf 40 Grad nicht überschreiten
- Offene Flammenquellen wie Kerzen dürfen nicht auf dieses Produkt gestellt werden
- Verwenden Sie zur Reinigung dieses Produkts nur ein trockenes Tuch oder eine weiche Bürste.

PERIPAD-705

LED Anzeige	Status
Rot leuchtend - An	Rot leuchtend - An
Rot leuchtend - An	Koppeln
Rot leuchtend - An	Batterie fast leer

繁體中文 (TC)

USB 數字鍵盤
型號：PERIPAD-205
電源輸入：DC 5V ±20mA
製造年份：如本體
原產地：中國大陸

RoHS

製造商：佩銳科技(深圳)有限公司
地址：深圳市南山區西麗街道文苑路43號聚創金谷創庫園A棟509-510
進口商：仁宏國際有限公司
地址：新北市新店區安祥路97巷2號1樓
電話：02-22008556

限用物質含有情況標示表

設備名稱：USB 數字鍵盤 型號：PERIPAD-205
Equipment name: Type designation (Type)

單元 Unit	限制物質及其化學符號 Restricted substance and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻Hexavalent Chromium (Cr ^{VI})	多溴聯苯Polybrominated biphenyls (PBBs)	多溴二苯醚Polybrominated diphenyl ethers (PBDEs)
機殼機座	○	○	○	○	○	○
彈簧連軸	○	○	○	○	○	○
彈簧彈片	○	○	○	○	○	○
彈簧連軸	○	○	○	○	○	○
彈簧連軸	○	○	○	○	○	○

備註1: "≤0.1 wt%" 及 "≤0.01 wt%" 係指限制物質之百分比含量未超出百分比含量基準值。
Note 1: "≤0.1 wt%" and "≤0.01 wt%" indicate that the percentage content of the restricted substance exceeds the reference percentage value of previous edition.
備註2: "○" 係指該項限制物質之百分比含量未超出百分比含量基準值。
Note 2: "○" indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of previous edition.
備註3: "-" 係指該項限制物質為排除項目。
Note 3: "-" indicates that the restricted substance corresponds to the exemption.

繁體中文 (TC)

無線2.4GHz 數字鍵盤
型號：PERIPAD-705
電源輸入：DC 5V ±10mA
製造年份：如本體
原產地：中國大陸

RoHS

製造商：佩銳科技(深圳)有限公司
地址：深圳市南山區西麗街道文苑路43號聚創金谷創庫園A棟509-510
進口商：仁宏國際有限公司
地址：新北市新店區安祥路97巷2號1樓
電話：02-22008556

限用物質含有情況標示表

設備名稱：無線2.4GHz 數字鍵盤 型號：PERIPAD-705
Equipment name: Type designation (Type)

單元 Unit	限制物質及其化學符號 Restricted substance and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻Hexavalent Chromium (Cr ^{VI})	多溴聯苯Polybrominated biphenyls (PBBs)	多溴二苯醚Polybrominated diphenyl ethers (PBDEs)
機殼機座	○	○	○	○	○	○
彈簧連軸	○	○	○	○	○	○
彈簧彈片	○	○	○	○	○	○
彈簧連軸	○	○	○	○	○	○
彈簧連軸	○	○	○	○	○	○

備註1: "≤0.1 wt%" 及 "≤0.01 wt%" 係指限制物質之百分比含量未超出百分比含量基準值。
Note 1: "≤0.1 wt%" and "≤0.01 wt%" indicate that the percentage content of the restricted substance exceeds the reference percentage value of previous edition.
備註2: "○" 係指該項限制物質之百分比含量未超出百分比含量基準值。
Note 2: "○" indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of previous edition.
備註3: "-" 係指該項限制物質為排除項目。
Note 3: "-" indicates that the restricted substance corresponds to the exemption.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio-frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.