



Report No. : HCT1304069FCC

Applicant:	ADDON Technology
Product:	Digitx/Mushroom Bluetooth Speaker
Model No:	Mushroom, BT-100, MS-100A, BT-200
Trademark:	N/A
Test Standards:	FCC Part 15 Subpart C, Paragraph 15.247

Test result: It is herewith confirmed and found to comply with the requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of electromagnetic compatibility

Approved By

Erictim

Eric Lin Manager

Dated:

April 25, 2013

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

Shenzhen HCT Technology Co.,Ltd.

Room104, Number3, Lane14, Shangshatangyan Village, Futian District, Shenzhen



Test Report	Conclusion
Content	

1.0	General Details	3
1.1	Applicant Details	3
1.2	Description of EUT	3
1.3	Submitted Sample	3
1.4	Test Duration	3
1.5	Test Uncertainty	3
1.6	Test By	3
2.0	List of Measurement Equipment	4
3.0	Technical Details	5
3.1	Summary of Test Results	5
3.2	Test Standards	5
4.0	Test Lab Details	5
5.0	Power Line Conducted Emission Test	6
5.1	Schematics of the Test	6
5.2	Test Method and Test Procedure	6
5.3	Configuration of the EUT	6
5.4	EUT Operating Condition	7
5.5	Conducted Emission Limit	7
5.6	Test Result	7
6.0	Radiated Emission test	10
6.1	Test Method and Test Procedure	10
6.2	Configuration of the EUT	10
6.3	EUT Operation Condition	10
6.4	Radiated Emission Limit	11
7.0	20dB Bandwidth Measurement	19
8.0	Maximum Peak Output Power	32
9.0	Carrier Frequency Separation	34
10.0	Number of Hopping Channel	38
11.0	Time of Occupancy (Dwell Time)	42
12.0	Out of Band Measurement	55
13.0	Antenna Requirement	68
14.0	RF Exposure	69
15.0	FCC Label	70
16.0	Photo of Test Setup and EUT View	71

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



1.0 General Details

1.1 Applicant Details

Applicant:ADDON TechnologyAddress:1F.,NO.14,Ln.,53,Sec.4,XinYi Rd.,TaiPei,TaiwanTelephone:+886-2-2325-3569Fax:+886-2-2706-9692

1.2 Description of EUT

-	
Product:	Digitx/Mushroom Bluetooth Speaker
Manufacturer:	ADDON Technology
Alternative:	Contel
Brand Name:	N/A
Model Number:	Mushroom
Additional Model Name	BT-100, MS-100A, BT-200
Additional Trade Name	N/A
Rating:	3.7V with 400 mAh powered by Li-ion Battery
Power Supply	N/A
Type of Modulation	GFSK, Π/4QPSK, 8DPSK
Frequency range	2402-2480MHz
Number of Channel	79
Frequency Selection	By software
Antenna type	PCB Printed antenna, and the maximum Gain of this antenna is 0dBi

1.3 Submitted Sample: 2 Samples

- 1.4 Test Duration: 2013-04-18 to 2013-04-25
- 1.5 Test Uncertainty Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.6

Test Engineer

Withi. Geni

The sample tested by

Print Name: Willis Gui

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



2.0	Test Equipments						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	ROHDE&SCHWA RZ	ESPI 3	100379	2012-05-29	2013-05-28		
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	2012-05-29	2013-05-28		
Impuls-Begrenzer	ROHDE&SCHWA RZ	ESH3-Z2	100281	2012-05-29	2013-05-28		
Loop Antenna	ЕМСО	6502	00042960	2012-05-29	2013-05-28		
ESPI Test Receiver	ROHDE&SCHWA RZ	ESI26	838786/013	2012-05-29	2013-05-28		
3m OATS			N/A	2012-05-29	2013-05-28		
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170399	2012-05-29	2013-05-28		
Horn Antenna	SCHWARZBECK	BBHA 9120	D143	2012-05-29	2013-05-28		
Power meter	Anritsu	ML2487A	6K00003613	2012-05-29	2013-05-28		
Power sensor	Anritsu	MA2491A	32263	2012-05-29	2013-05-28		
Bilog Antenna	Schwarebeck	VULB916 3	9163/142	2012-05-29	2013-05-28		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2012-05-29	2013-05-28		
9*6*6 Anechoic			N/A	2012-05-29	2013-05-28		
EMI Test Receiver	RS	ESCS30	100139	2012-05-29	2013-05-28		
LISN	RS	ESH2-Z5	100225	2012-05-29	2013-05-28		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2012-05-29	2013-05-28		
Pre-Amplifier	A.H.	PAM-0126	1415261	2012-05-29	2013-05-28		

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:						
Requirement	CFR 47 Section	Result	Notes			
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies			
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies			
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies			
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies			
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies			
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies			
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies			
Conducted Emissions	15.207(a), 15.107	PASS	Complies			
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies			

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 Test Lab Details

Name: Shenzhen Emtek Co., Ltd.

Address: Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052China FCC Registration Number: 406365


This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



5. Power Line Conducted Emission Test

5.1 Schematics of the test

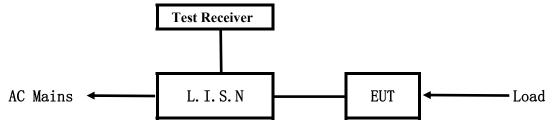


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Test Voltage: 120V~, 60Hz

Block diagram of Test setup

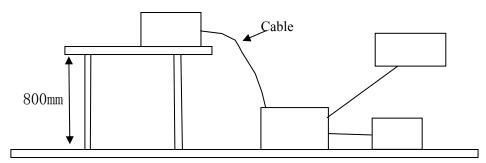

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below. 79 channels are provided to the EUT

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



A. EUT

Device	Manufacturer	Model	FCC ID
Digitx/Mushroom	ADDON Technology	Mushroom,	FCC ID: Z2HMS100
Bluetooth Speaker		BT-100,	
		MS-100A,	
		BT-200	

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

A Setup the EUT and simulators as shown on follow

B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207 and RSS-210

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)	
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15~\sim~0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50~\sim~5.00$	73.0	60.0	56.0	46.0
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: the worse cases was selected to conducted the test

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



A: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging Mode (powered by PC) Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

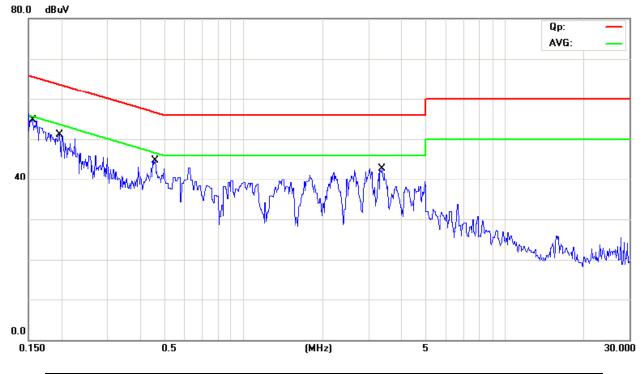

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)		Quasi-peak	Average	Quasi-peak	Average
0.1560	Neutral	47.81	35.11	65.75	55.75
0.1985	Neutral	40.95	34.75	63.76	53.76
0.4581	Neutral	40.43	35.83	56.73	46.73
3.3752	Neutral	35.05	27.85	56.00	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




B: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging Mode (powered by PC) Equipment Level: Class B Results: Pass

Please refer to following diagram for individual

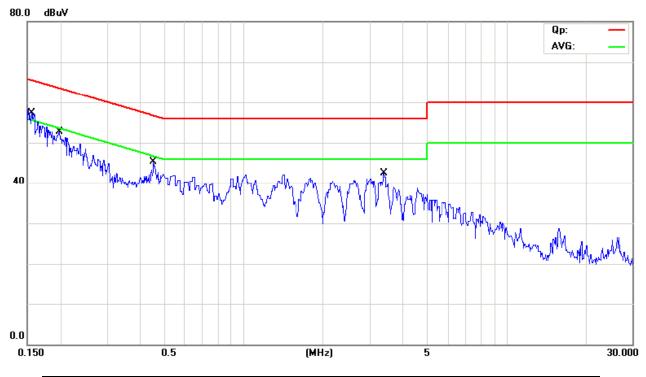

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)		Quasi-peak	Average	Quasi-peak	Average
0.1544	Live	48.00	34.40	65.76	55.76
0.4525	Live	37.92	35.02	56.83	46.83
0.1973	Live	42.65	34.15	63.72	53.72
3.4024	Live	34.46	27.58	56.00	46.00


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

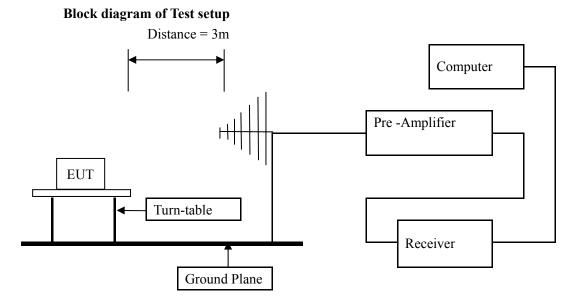

- 6.2 Configuration of The EUT Same as section 5.3 of this report
- 6.3 EUT Operating Condition Same as section 5.4 of this report.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

	-	81
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Frequencies in restricted band are complied to limit on Paragraph 15.109. 15.209

Note: 1. RF Voltage $(dBuV) = 20 \log RF$ Voltage (uV)

2. In the Above Table, the higher limit applies at the band edges.

3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

5. Battery was fully charged during the radiated test.

6. After pre-scan, GFSK modulation mode was the worse case and it was selected to conduct the radiated emission tests.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition:Transmitting Mode (GFSK)Results:Pass


Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
89.44	89.44 23.84		43.50
143.56	26.62	V	43.50

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Test Figure: Transmitting mode

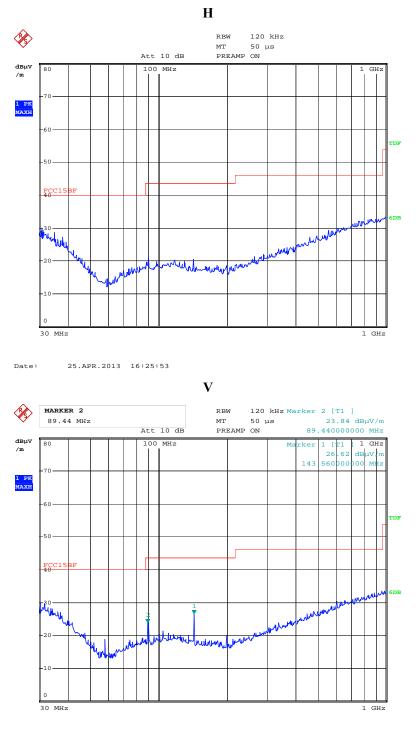

Date: 25.APR.2013 16:27:30

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2402	90.08(PK)	V	Eurodomontol Eroquonou
2402	90.48(PK)	Н	Fundamental Frequency
4804	47.81(PK)	Н	74(Peak)/ 54(AV)
4804	45.23(PK)	V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Operation Mode: Transmitting under Low Channel (2402MHz)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode	: Transmitting g	under Middle	Channel (2441MHz)
-----------------------	------------------	--------------	-------------------

-		,	,	
Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB µ V/m)	
2441	89.02 (PK)	Н	Fundamental Frequency	
2441	89.28 (PK)	V	Fundamental Frequency	
4882		Н	74(Peak)/ 54(AV)	
4882	46.54(PK)	V	74(Peak)/ 54(AV)	
7323		H/V	74(Peak)/ 54(AV)	
9764	4 H/V		74(Peak)/ 54(AV)	
12205		H/V	74(Peak)/ 54(AV)	
14646		H/V	74(Peak)/ 54(AV)	
17087		H/V	74(Peak)/ 54(AV)	
19528		H/V	74(Peak)/ 54(AV)	
21969		H/V	74(Peak)/ 54(AV)	
24410		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



• P • • • • • • • • • • • • • •	operation (four) fransmitting and ringh channel								
Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB µ V/m)						
2480	89.57 (PK)	Н	Eundemontal Fragueney						
2480	90.56 (PK)	V	Fundamental Frequency						
4960.	47.39(PK)	Н	74(Peak)/ 54(AV)						
4960.	44.69(PK)	V	74(Peak)/ 54(AV)						
7440		H/V	74(Peak)/ 54(AV)						
9920		H/V	74(Peak)/ 54(AV)						
12400		H/V	74(Peak)/ 54(AV)						
14880		H/V	74(Peak)/ 54(AV)						
17360		H/V	74(Peak)/ 54(AV)						
19840		H/V	74(Peak)/ 54(AV)						
22320		H/V	74(Peak)/ 54(AV)						
24800		H/V	74(Peak)/ 54(AV)						

Operation Mode: Transmitting under High Channel

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


2. Remark "---" means that the emissions level is too low to be measured

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.




Please refer to the following test plots for details: Low Channel: Vertical

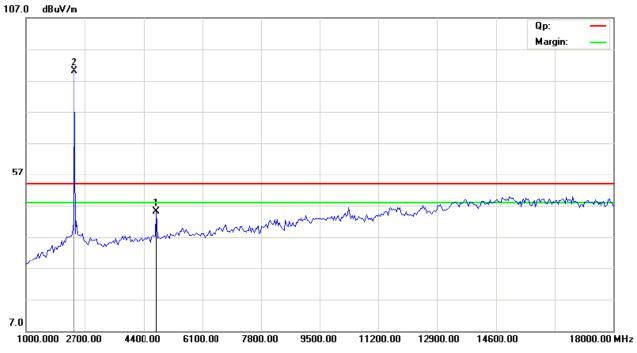

Low Channel : Horizontal

107.0 dBuV/m

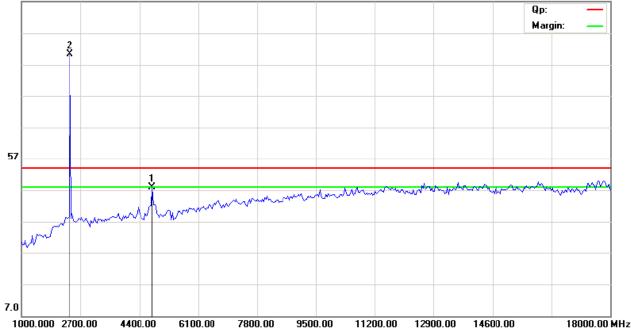


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.






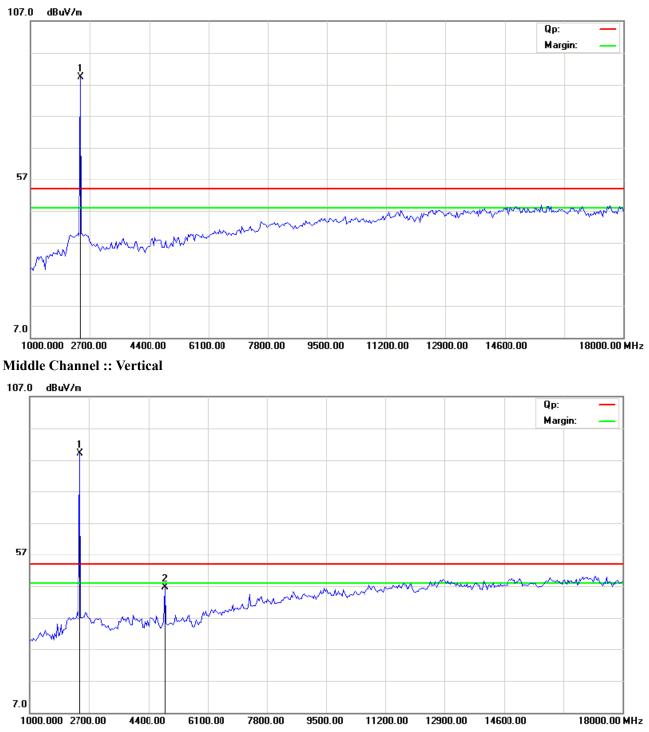

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



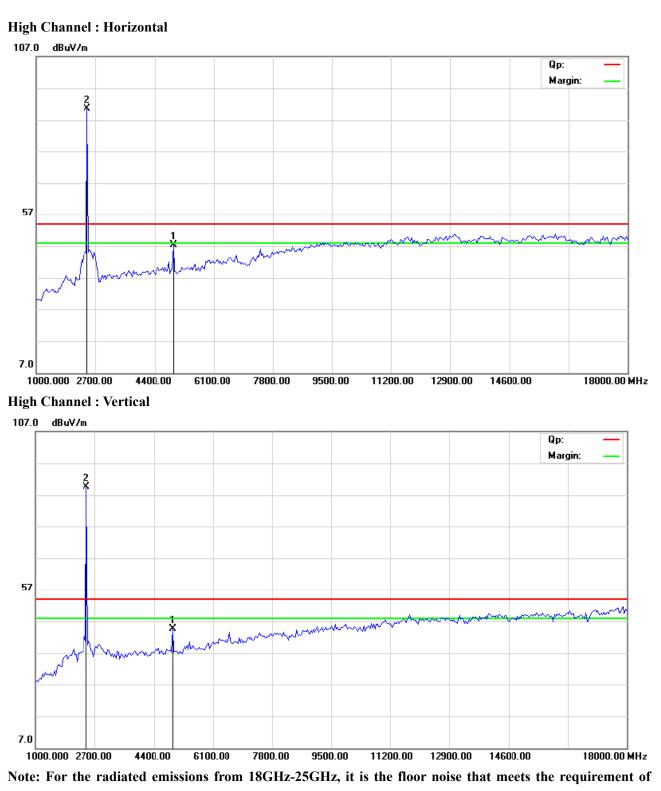

FCC rule.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



7.0 20dB Bandwidth Measurement 7.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.

2. Set the spectrum analyzer as follows: Span = 3MHz, RBW=30 kHz, VBW=100 kHz,

Sweep = auto Detector function = peak Trace = max hold

3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result:

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



GFSK Modulation

EU	Г	Digitx/Mus	shroom Bluetooth Mode		lel	Mushro	oom	
		S	Speaker					
Mode		Keep	Transmitting Input Voltage		oltage	DC3.	7V	
Temper	ature	24	4 deg. C, Humidity 56% RH		dity 56% RH			
Channel		el Frequency (MHz)	1 5		andwidth		num Limit (kHz)	Pass/ Fail
Low		2402	2402 828		828			Pass
Middle		2441	846					Pass
High		2480		852				Pass


This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Test Figure:

1. Condition: Low Channel

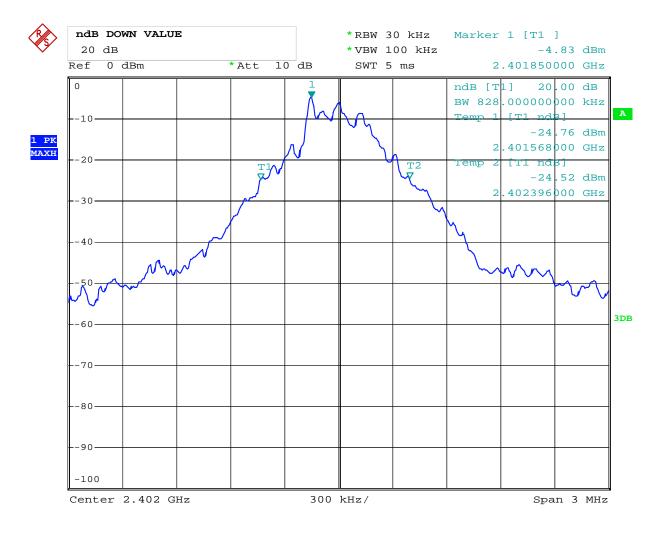


Date: 25.APR.2013 11:59:48

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



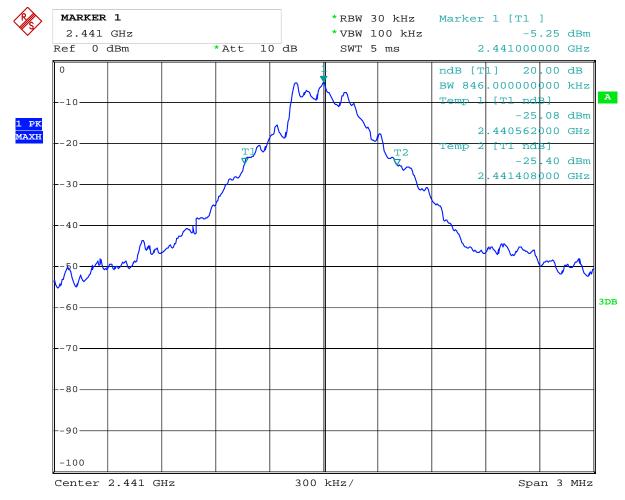


2. Condition: Middle Channel

Date: 25.APR.2013 12:00:40

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



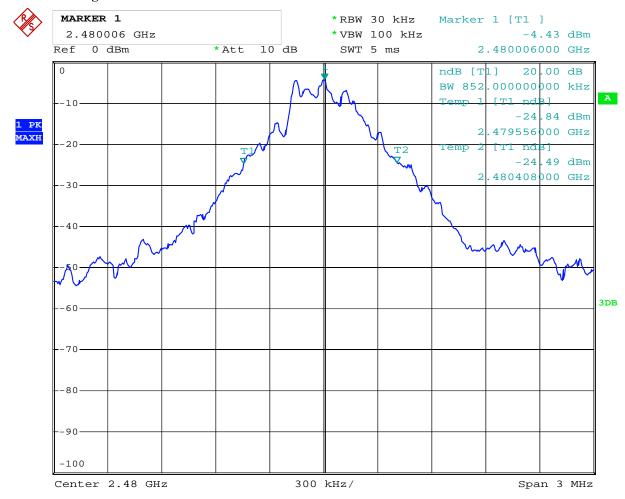

3. Condition: High Channel

Date: 25.APR.2013 12:01:14

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



$\pi/4QPSK$ Modulation


EU	Г	Digitx/Mus	shroom B	luetooth	Mod	lel	Mushre	oom	
		S	Speaker						
Мос	le	Keep	Transmitting Input Voltage		Keep Transmitting		oltage	DC3.	7V
Temper	ature	24	4 deg. C, Humidity 56% RH		lity 56% RH				
Channel		el Frequency (MHz)	20 dB	20 dB Channel Bandwidt (kHz)			num Limit (kHz)	Pass/ Fail	
Low		2402	1170					Pass	
Middle		2441	1218					Pass	
High		2480		1224				Pass	

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Test Figure:

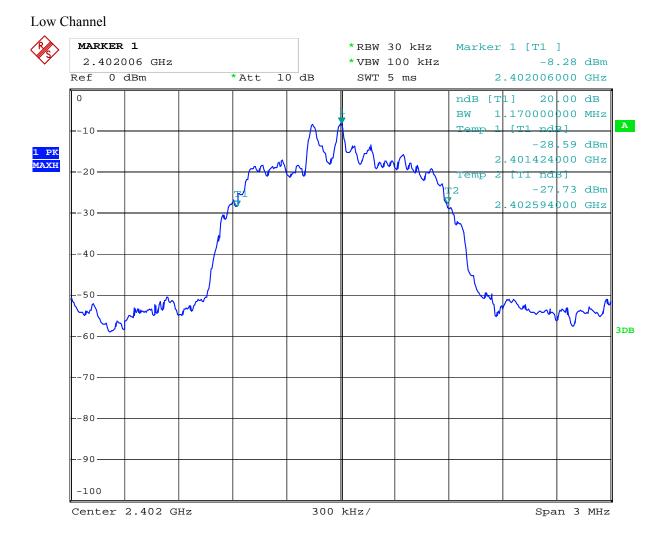


Date: 25.APR.2013 12:04:12

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



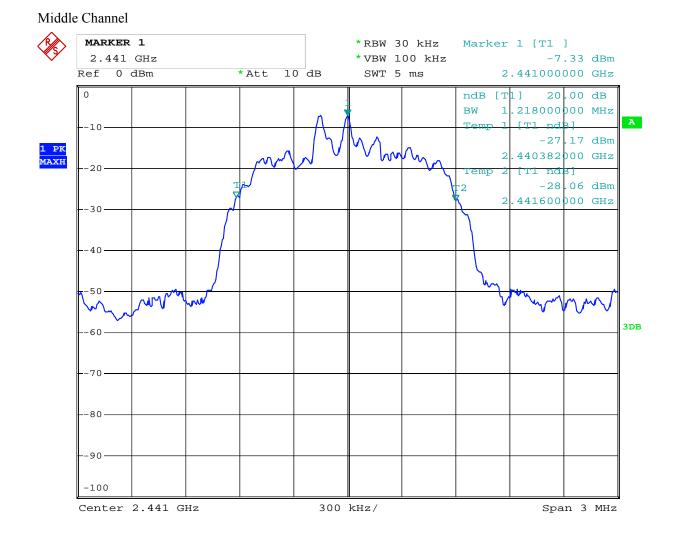


Date: 25.APR.2013 12:03:44

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



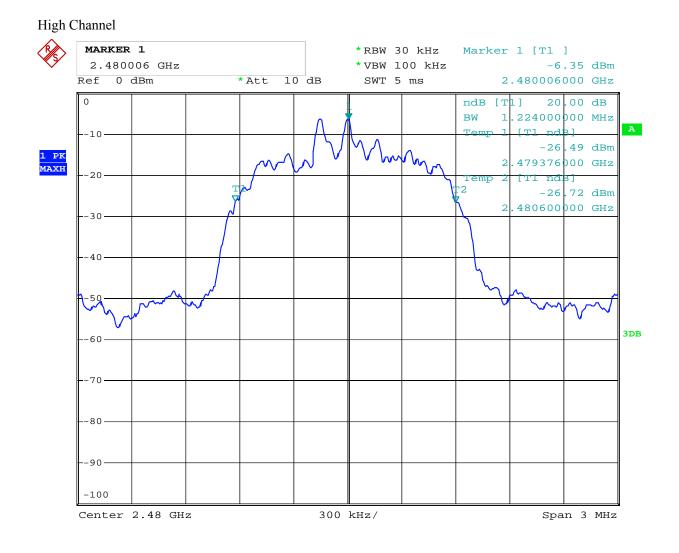

Date: 25.APR.2013 12:03:06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



8DPSK Modulation


EU	Г	Digitx/Mus	shroom Bluetooth		Mod	lel	Mushre	oom
		S	Speaker					
Мос	le	Keep	Transmitting		Input Vo	oltage	DC3.	7V
Temper	ature	24	24 deg. C, Humidity 56% RH		amidity 56% RI		RH	
Channel		el Frequency (MHz)	20 dB	20 dB Channel Bandwidth (kHz)			num Limit (kHz)	Pass/ Fail
Low		2402	1212					Pass
Middle		2441	1206					Pass
High		2480		1212				Pass

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Test Figure:

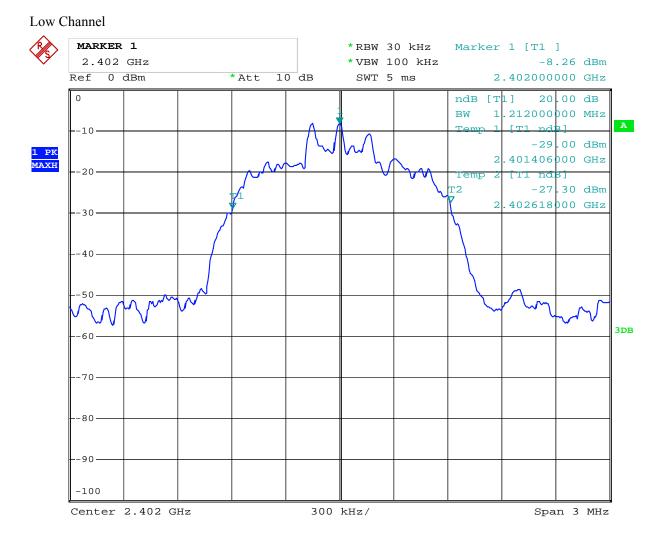


Date: 25.APR.2013 12:05:40

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Page 30 of 81

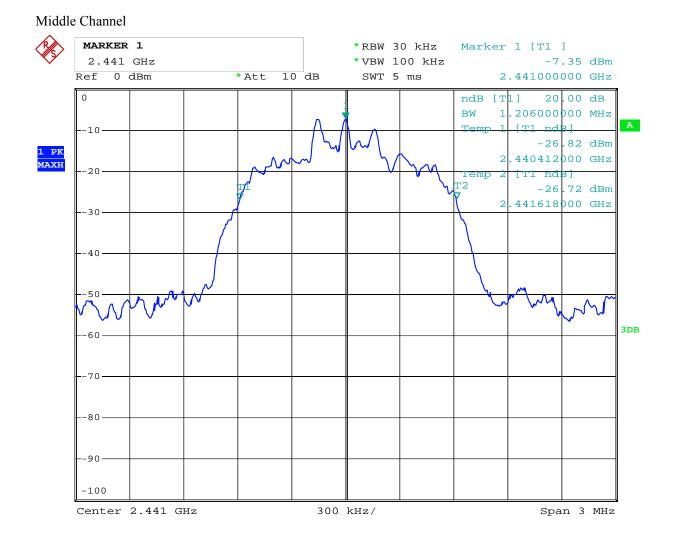


Date: 25.APR.2013 12:06:30

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



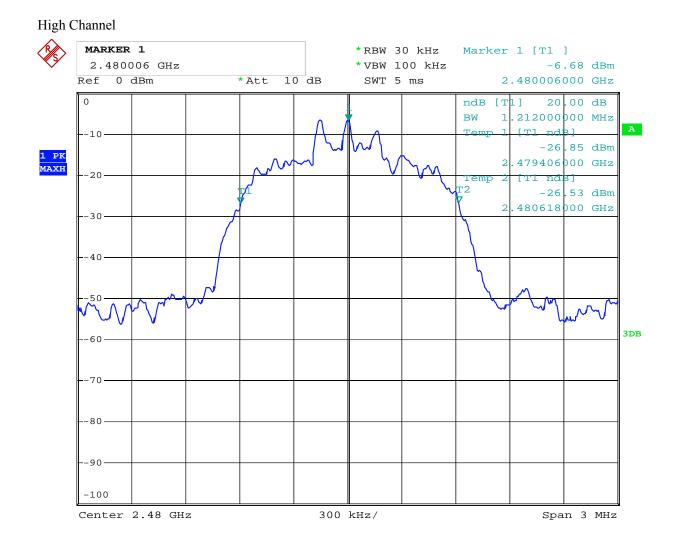

Date: 25.APR.2013 12:06:58

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



8. Maximum Peak Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.

2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW \ge RBW; Sweep = auto; Detector function = peak; Trace = max hold

3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.

4. Repeat above procedures until all frequencies measured were complete.

EUT Digitx/Mushroon Speake				М	odel	Mı	ıshroom	
Mode		Keep Tran			DC3.7V			
Temperature	9	24 deg	g. C,	Hur	nidity	7 56% RI		
Channel	Cha	annel Frequency (MHz)	Peak Power Output (dBm)		Peak P Lin (dB	nit	Pass/ Fail	
Low		2402	-2.60		30		Pass	
Middle		2441	-1.54	-1.54 3)	Pass	
High		2480	-0.74		30)	Pass	

8.4Test Results (GFSK MODE)

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



8.5Test Results (II/4QPSK MODE)

EUT		Digitx/Mushroo	om Bluetooth	М	odel	Мι	ıshroom
		Speal	ker				
Mode		Keep Tran	ansmitting Input Voltage DC3.		C3.7V		
Temperature	re 24 deg. C, Humidity		50	5% RH			
Channel	Ch	annel Frequency (MHz)	Peak Power Output (dBm)		Peak P Lin (dB	nit	Pass/ Fail
Low		2402	-4.91		30		Pass
Middle		2441	-3.62		30		Pass
High		2480	-2.73		30)	Pass

8.6Test Results (8DPSK MODE)

EUT		Digitx/Mushroo	om Bluetooth	М	odel	Мι	ıshroom	
		Speal	ker					
Mode		Keep Tran	smitting Input Vo		Input Voltage I		DC3.7V	
Temperature	ure 24 deg		g. C,	Hur	nidity	50	6% RH	
Channel	Ch	annel Frequency (MHz)	Peak Power Output (dBm)		Peak P Lin (dB	nit	Pass/ Fail	
Low		2402	-4.70		30		Pass	
Middle		2441	-3.85		30		Pass	
High		2480	-3.00		30)	Pass	

Note: the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span; Video (or Average) Bandwidth (VBW) $\geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold

3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.

4. Repeat above procedures until all frequencies measured were complete.

9.4Test Result

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.




GFSK Modulation

EUT		Digitx/Mushroom Bluetooth		Model		Mushroom	
		Speaker					
Mode		Keeping Transmitting		Input Voltage		DC3.7V	
Temperature		24 deg. C,		Humidity		56% RH	
Channel	Channel Frequency		Carrier Frequency		Limit		Pass/ Fail
		(MHz)	Separation		Linit		
Middle		2441	1.000MHz		≥ 25 kHz or		Pass
			tv		two-thirds of 20		
					dB bandwidth		

Test Plots

Middle Channel

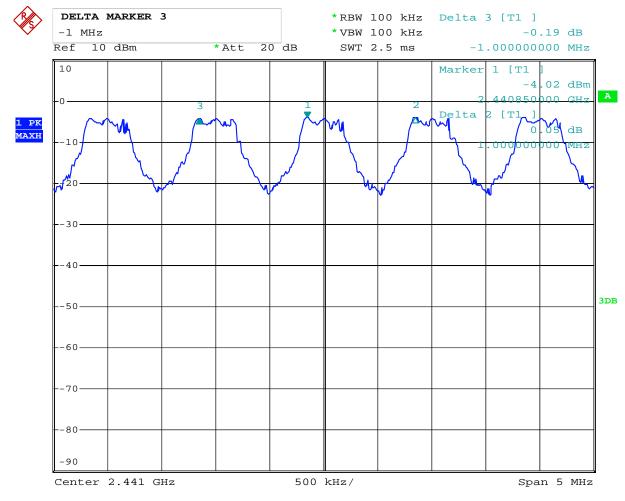

Date: 25.APR.2013 12:51:43

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Л/4QPSK Modulation

EUT		Digitx/Mushroom Bluetooth		Model		Mushroom	
		Speaker					
Mode		Keeping Transmitting		Input Voltage		DC3.7V	
Temperature		24 deg. C,		Humidity		56% RH	
Channel	Ch	annel Frequency	Carrier Frequency		Limit		Pass/ Fail
		(MHz)	Separation		LIII	IIt	
Middle		2441	0.98MHz		≥ 25 kHz or		Pass
				two-third		ls of 20	
						dB bandwidth	

Test Plots

Middle Channel

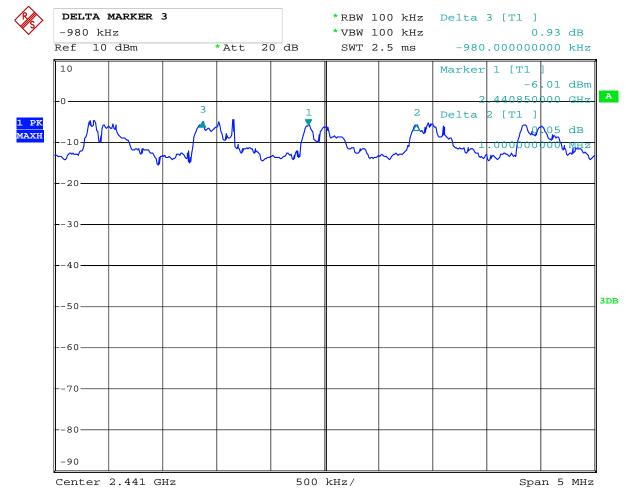

Date: 25.APR.2013 13:05:23

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




8DPSK Modulation

EUT		Digitx/Mushroo	om Bluetooth	М	odel	Мι	ishroom
		Speaker					
Mode		Keeping Tra	insmitting	Input Voltage		D	C3.7V
Temperat	ure	24 deg	g. C,	Hur	nidity 56% RH		5% RH
Channel	Ch	annel Frequency	Carrier Frequ	iency	Lin	ait	Pass/ Fail
Chaimer		(MHz)	Separatio	n	LIII	IIt	
Middle		2441	1.000MHz		≥ 25 kHz or		Pass
					two-third	ls of 20	
					dB band	dwidth	

Test Plots

Middle Channel

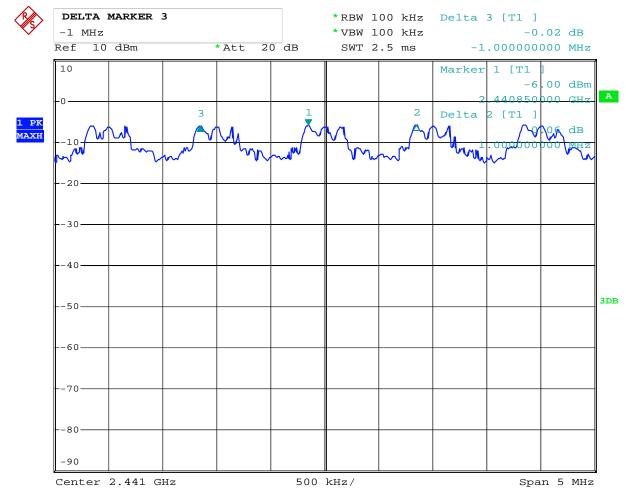

Date: 25.APR.2013 13:10:41

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



10. Number of Hopping Channels 10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW $\geq 1\%$ of the span; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold

3. Record the number of hopping channels.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



10.4Test Result (GFSK MODE)

EUT	Digitx/Mushroom Bluetooth		Model		Mushroom	
		Speaker				
Mode	Keep Transmitting		Input Voltage		DC3.7V	
Temperature		24 deg. C,	Hur	nidity	50	5% RH
Operating Frequ	iency	Number of hopping cha	nnels	Lin	nit	Pass/ Fail
2402-2480M	Hz	79		≥ 1	5	Pass

Test Plot (GFSK MODE)

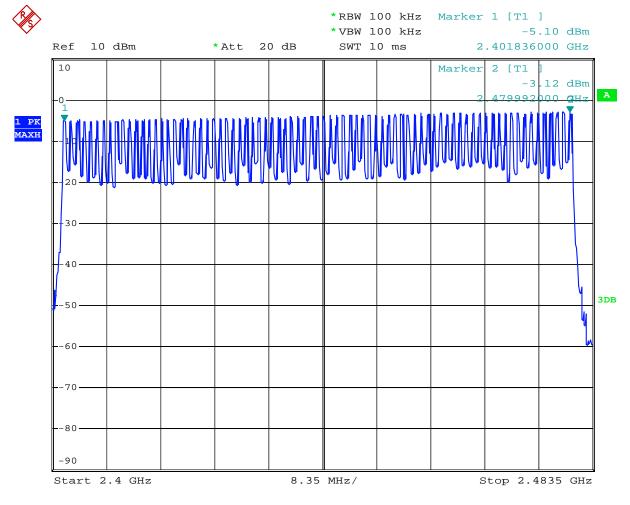

Date: 25.APR.2013 12:48:16

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



10.5 Test Result (П/4QPSK MODE)

EUT	Digitx/Mushroom Bluetooth		Model		Мι	Mushroom	
		Speaker					
Mode	Keep Transmitting		Input Voltage		DC3.7V		
Temperature		24 deg. C,	Hur	nidity	50	5% RH	
Operating Frequ	ency Number of hopping c		nnels	Lin	nit	Pass/ Fail	
2402-2480M	Hz 79			≥ 1	5	Pass	

Test Plot (II/4QPSK MODE)

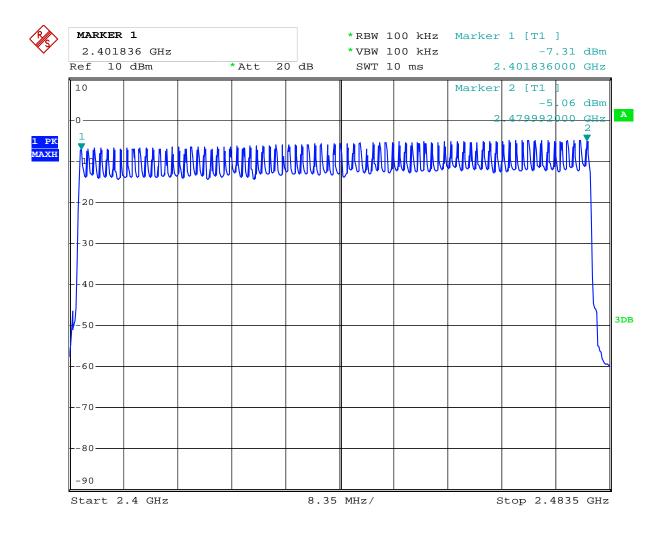

Date: 25.APR.2013 12:43:51

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



10.5 Test Result (8DSK MODE)

EUT	Digitx/Mushroom Bluetooth		М	Model		ıshroom
		Speaker				
Mode	Keep Transmitting		Input Voltage		DC3.7V	
Temperature		24 deg. C,	Hur	nidity	50	5% RH
Operating Frequ	iency	Number of hopping cha	nnels	Lin	nit	Pass/ Fail
2402-2480M	Hz 79			≥ 1	5	Pass

Test Plot (8DPSK MODE)

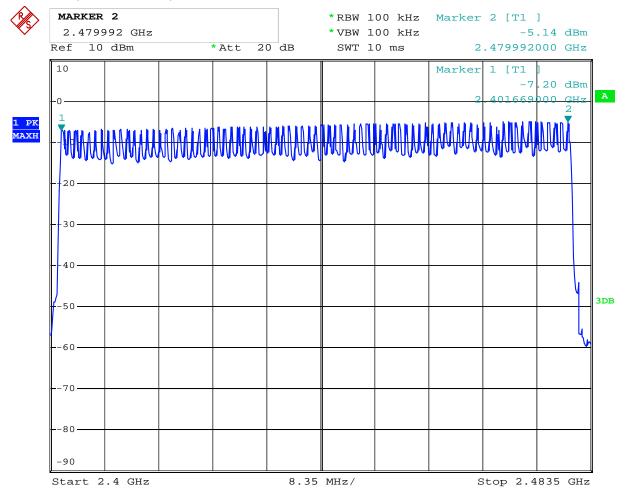

Date: 25.APR.2013 12:39:14

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



11. Time of Occupancy (Dewell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW

RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold

3. Measure the dwell time using the marker-delta function.

4. Repeat above procedures until all frequencies measured were complete.

5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



11.4 Test Result

GFSK Modulation

EUT		Digitx/Mushroom Bluetooth Speaker			Model		Mushroom
Mode		Ke	Keep Transmitting			tage	DC3.7
Temperatu	re		24 deg. C,			ity	56% RH
Channel		Reading	Hoping Rate	A	Actual		Limit
Low		2.96	2.96 266.667 hop/s		0.32		0.4s
Middle		2.96	266.667 hop/s	0.32			0.4s
High		2.96	266.667 hop/s		0.32		0.4s

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 is the worse case


This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Test Plots:

Low Channel:

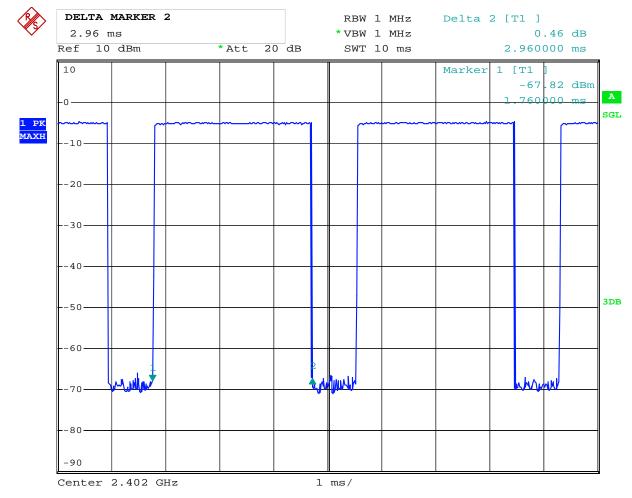


Date: 25.APR.2013 12:24:24

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Middle Channel:

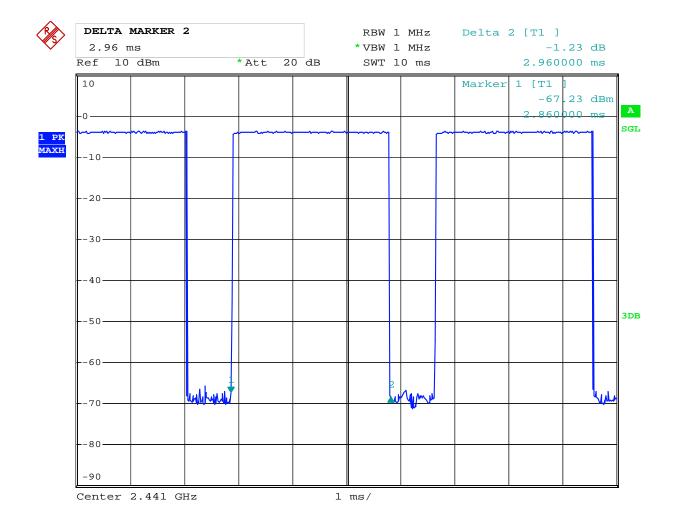

Date: 25.APR.2013 12:25:58

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



High Channel DELTA MARKER 2 RBW 1 MHz Delta 2 [T1] 2.96 ms *VBW 1 MHz -0.72 dB Ref 10 dBm * Att 20 dB SWT 10 ms 2.960000 ms 10 Marker 1 [T1 -69 61 dBm Α 200 00 -0 SGL 1 РК МАХН -10 -20 -30 -40 3DB -50 60 March -70 -80 -90 Center 2.48 GHz 1 ms/

Date: 25.APR.2013 12:26:53

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Л/4QPSK Modulation

EUT		Digitx/Mushroom Bluetooth Speaker			Model		Mushroom
Mode		Kee	Keep Transmitting			tage	DC3.7
Temperatu	re		24 deg. C,			ity	56% RH
Channel		Reading	Hoping Rate	Actual			Limit
Low		2.98	2.98 266.667 hop/s		0.32		0.4s
Middle	2.96		266.667 hop/s	0.32			0.4s
High		2.98	266.667 hop/s		0.32		0.4s


Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 is the worse case

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



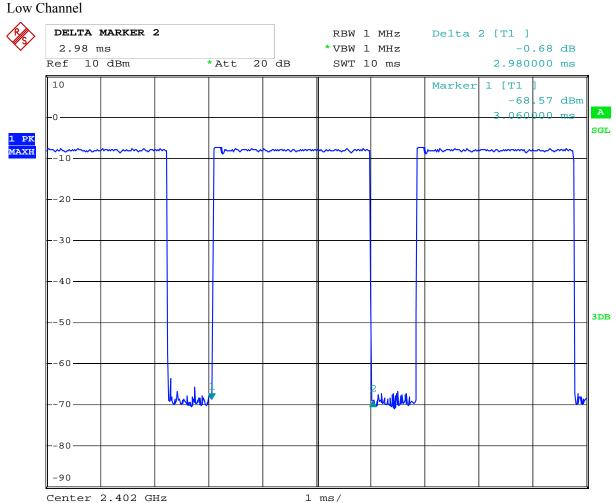

Center 2.402 GHz


25.APR.2013 12:29:53 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co., Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co., Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Middle Channel

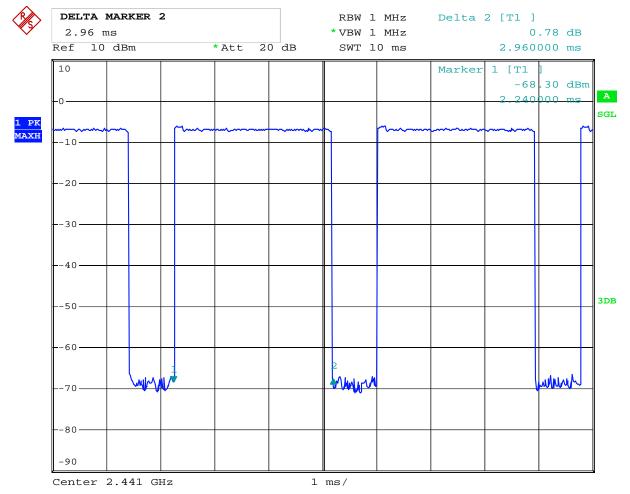

Date: 25.APR.2013 12:29:06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

High Channel



DELTA MARKER 2 RBW 1 MHz Delta 2 [T1] 2.98 ms *VBW 1 MHz -1.59 dB Ref 10 dBm * Att 20 dB SWT 10 ms 2.980000 ms 10 Marker 1 [T1 -69 46 dBm А 540 00 0 SGL 1 PK MAXH -10 -20 -30 -40 3DB -50 60 ~~~h.**/**h./l -70 80 -90 Center 2.48 GHz 1 ms/

Center 2.48 GHz

Date: 25.APR.2013 12:28:12

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



8DPSK Modulation

EUT		Digitx/Mush	Digitx/Mushroom Bluetooth Speaker			1	Mushroom
Mode		Kee	Keep Transmitting			tage	DC3.7
Temperatu	re		24 deg. C,			ity	56% RH
Channel		Reading	Hoping Rate	Actual			Limit
Low		2.96	2.96 266.667 hop/s		0.32		0.4s
Middle		3.00	266.667 hop/s	0.32			0.4s
High		2.98	266.667 hop/s		0.32		0.4s

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 is the worse case

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Low Channel



DELTA MARKER 2 RBW 1 MHz Delta 2 [T1] 2.96 ms *VBW 1 MHz 1.00 dB Ref 10 dBm * Att 20 dB SWT 10 ms 2.960000 ms 10 Marker 1 [T1 -69 19 dBm А 000 0 SGL 1 PK MAXH -10 -20 -30--40 3DB -50 60 NJAA W ı۸k -70 80 -90 1 ms/

Center 2.402 GHz


25.APR.2013 12:30:55 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co., Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co., Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Middle Channel

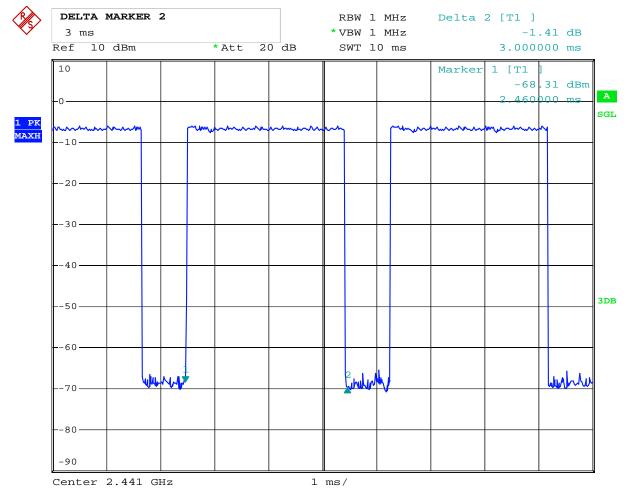

Date: 25.APR.2013 12:31:45

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

High Channel



DELTA MARKER 2 RBW 1 MHz Delta 2 [T1] 2.98 ms *VBW 1 MHz 0.65 dB Ref 10 dBm * Att 20 dB SWT 10 ms 2.980000 ms 10 Marker 1 [T1 -68 91 dBm А 800 0 SGL 1 РК МАХН -10 -20 -30 -40 3DB -50 60 . m./4 M -70 80 -90 1 ms/

Center 2.48 GHz

25.APR.2013 12:32:36 Date:


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co., Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co., Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.




Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	Low Channel
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C I		56% RH
Test Result:		Pass	Detector	РК
The Max. FS in	PK (dBµV/m)	38.6		74(dBµV/m)
Restrict Band	$AV(dB\mu V/m)$		Limit	54(dBµV/m)
2390MHz				

Test Figure:

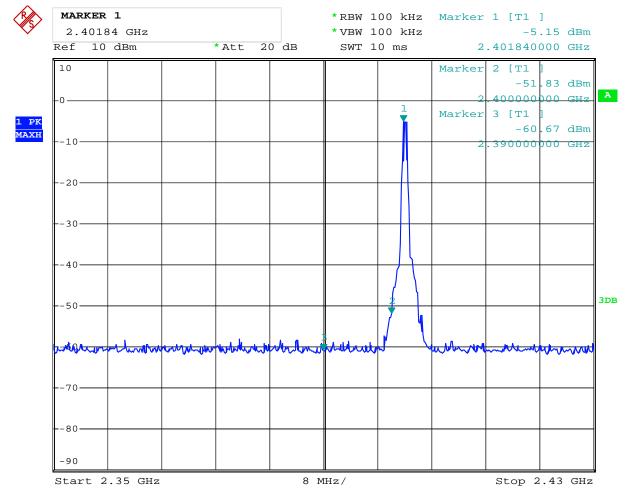

Date: 25.APR.2013 14:01:27

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	РК
The Max. FS in	PK (dBµV/m)	39.5		74(dBµV/m)
Restrict Band	$AV(dB\mu V/m)$	/(dBµV/m)		54(dBµV/m)
2483.5MHz				

Test Figure:

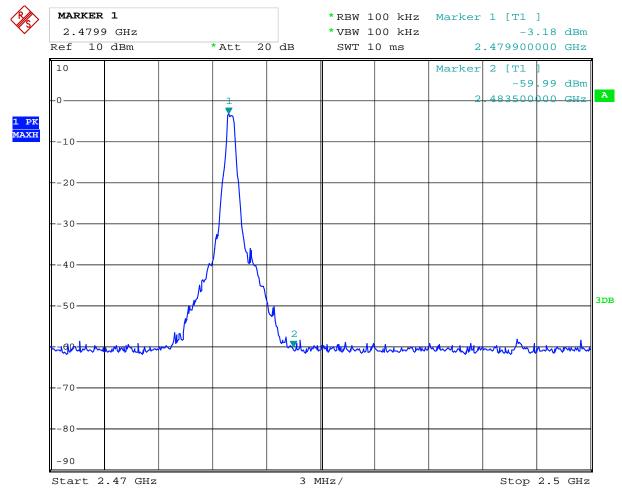

Date: 25.APR.2013 14:02:30

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Digitx/Musl	hroom Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	РК
The Max. FS in	PK (dBµV/m)	37.1		74(dBµV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

Test Figure:

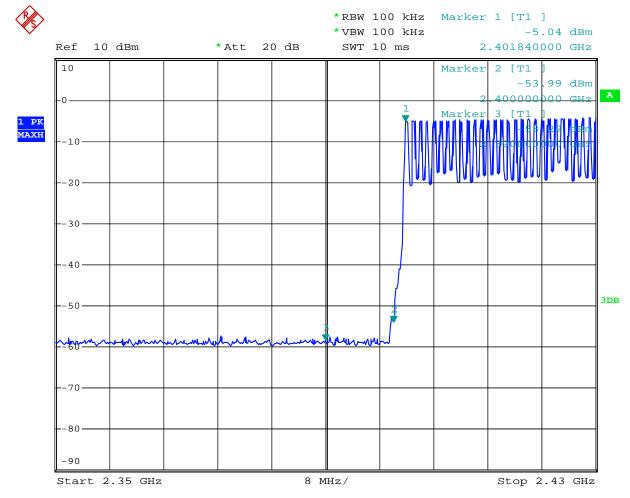

Date: 25.APR.2013 14:00:46

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Digitx/Musł	room Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Keej	ping Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	РК
The Max. FS in	PK (dBµV/m)	39.1		74(dBµV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

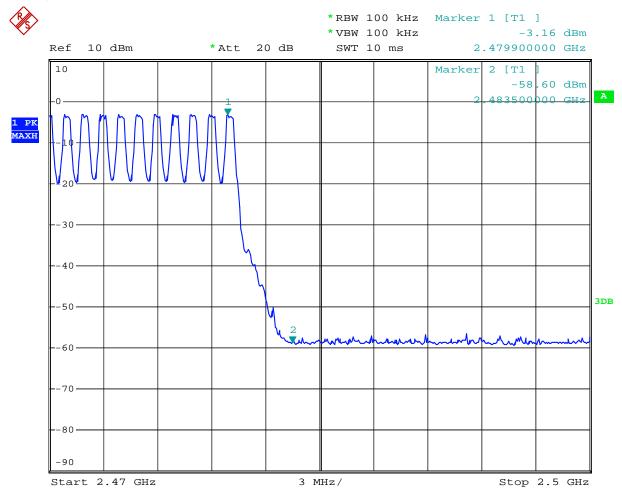

Date: 25.APR.2013 14:51:47

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: JI/4QPSK

12.4 Out of Band Test Result

Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	Low Channel
Mode	Kee	Keeping Transmitting		DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:		Pass	Detector	РК
The Max. FS in	PK (dBµV/m)	38.2		74(dBµV/m)
Restrict Band	$AV(dB\mu V/m)$		Limit	54(dBµV/m)
2390MHz				

Test Figure:

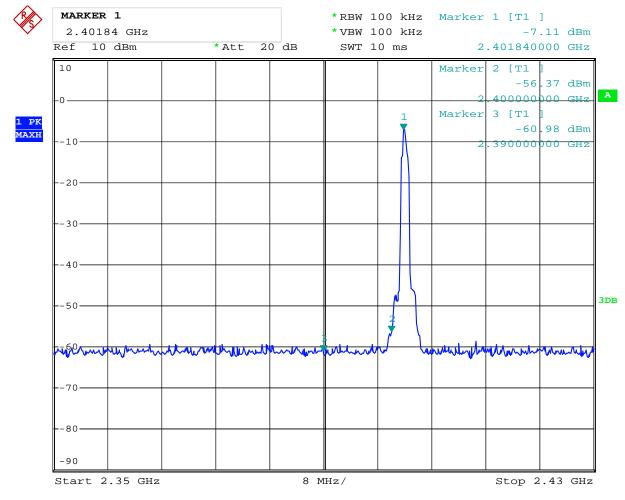

Date: 25.APR.2013 13:34:21

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: $\pi/4QPSK$

12.4 Out of Band Test Result

Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	РК
The Max. FS in	PK (dBμV/m) 39.0			74(dBµV/m)
Restrict Band	AV(dBµV/m)		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

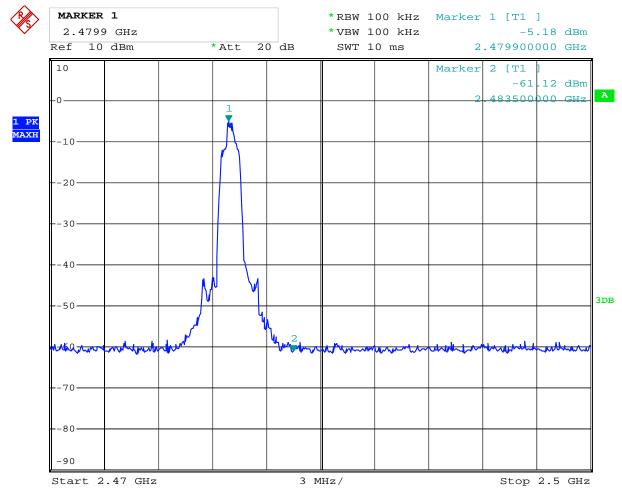

Date: 25.APR.2013 14:55:43

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: Л/4QPSK

12.4 Out of Band Test Result

Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	РК
The Max. FS in	PK (dBμV/m) 37.6			74(dBµV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

Test Figure:

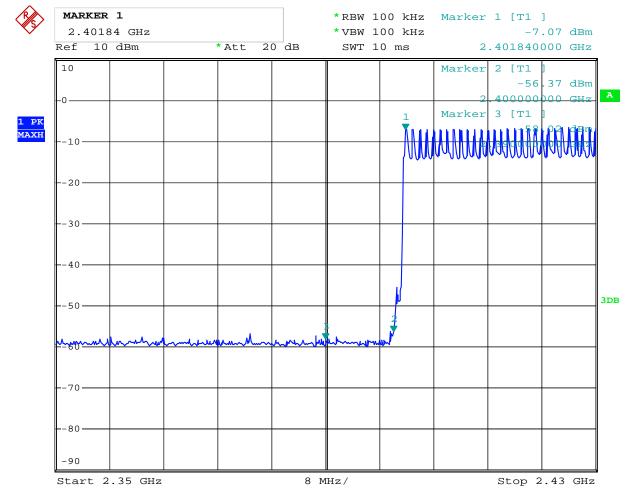

Date: 25.APR.2013 13:44:25

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: Л/4QPSK

12.4 Out of Band Test Result

Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	РК
The Max. FS in	PK (dBμV/m) 38.5			74(dBµV/m)
Restrict Band	AV(dBµV/m)		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

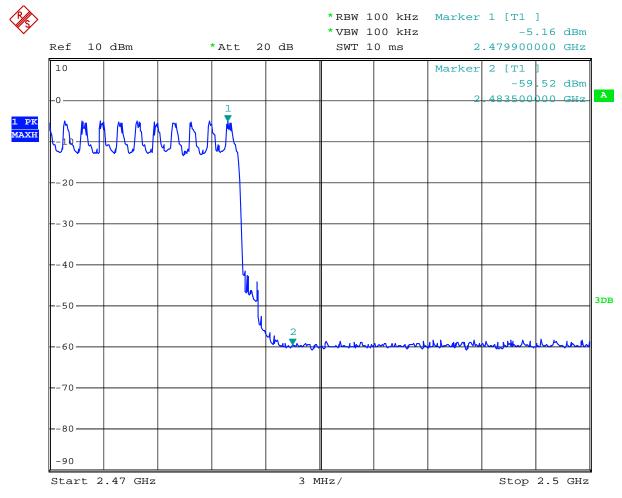

Date: 25.APR.2013 14:54:59

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	РК
The Max. FS in	PK (dBµV/m) 37.5			74(dBµV/m)
Restrict Band	AV(dBµV/m)		Limit	54(dBµV/m)
2390MHz				

Test Figure:

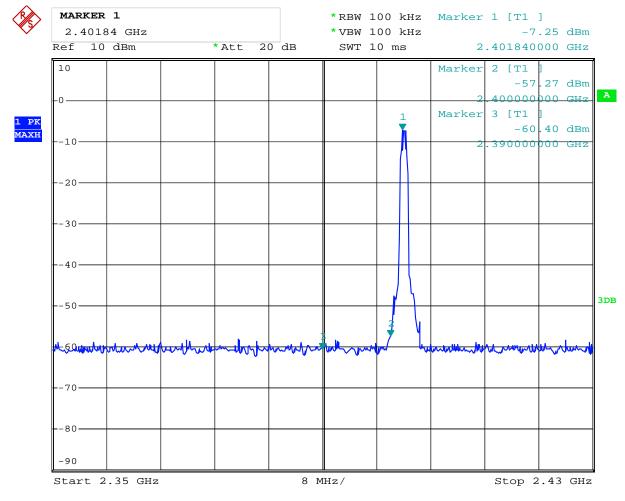

Date: 25.APR.2013 13:33:53

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	РК
The Max. FS in	PK (dBμV/m) 38.8			74(dBµV/m)
Restrict Band	AV(dBµV/m)		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

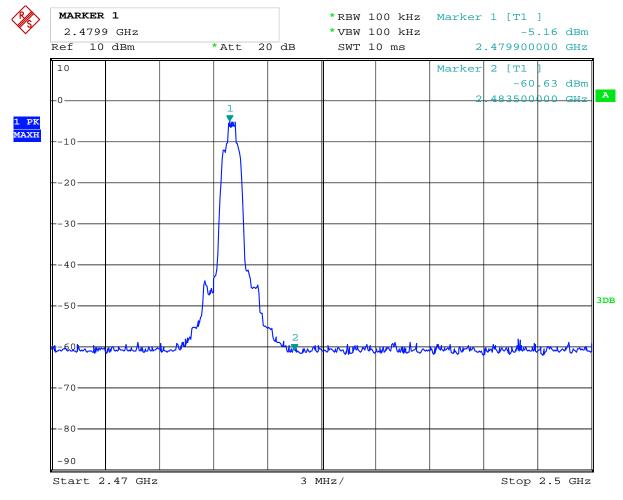

Date: 25.APR.2013 14:56:22

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	РК
The Max. FS in	PK (dBμV/m) 37.3			74(dBµV/m)
Restrict Band	AV(dBµV/m)		Limit	54(dBµV/m)
2390MHz				

Test Figure:

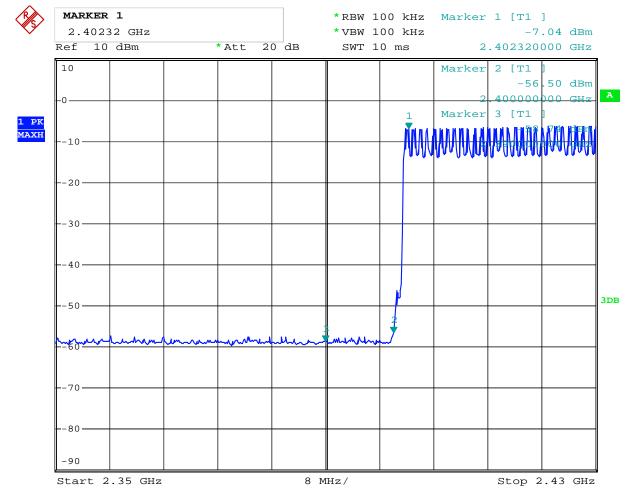

Date: 25.APR.2013 13:33:06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Type of Modulation: 8DPSK



Product:	Digitx/Mushroom Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	РК
The Max. FS in	PK (dBμV/m) 39.2			74(dBµV/m)
Restrict Band	AV(dBµV/m)		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

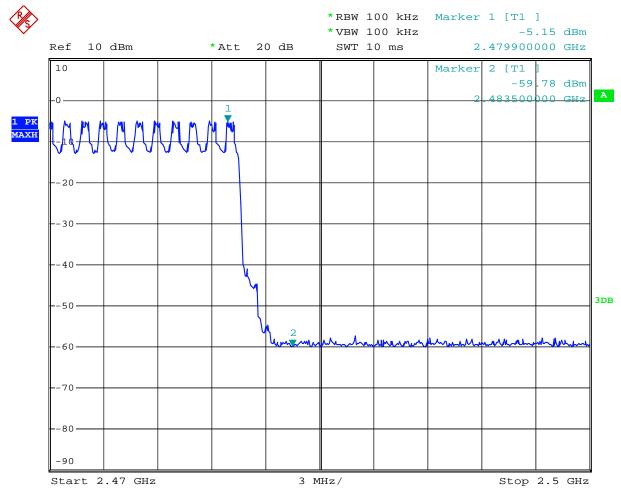

Date: 25.APR.2013 15:05:16

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected construction

There is a PCB printed antenna, and the maximum Gain of this antenna is 0dBi.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



14.0 RF Exposure

Applicable Standard

According to §1.1307(b)(5), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline. This is a Portable device. The Section 4.3.1 and Appendix A of KDB447498 D01 V05 was used as the guidance.

Calculation Result (Worse Case):

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [$\sqrt{f(GHz)}$] =0.84/5 * 1.6= 0.3, this value is less than 3.0 for 1-g SAR and \leq 7.5 for 10-g extremity SAR.

The SAR measurement is not necessary.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen HCT Technology Co.,Ltd . reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.




15.0 FCC ID Label

FCC ID: Z2HMS100

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

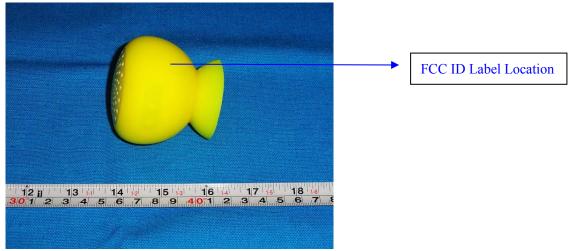

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



16.0 Photo of testing

16.1 Conducted test View




The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



16.2 Emission Radiated test View

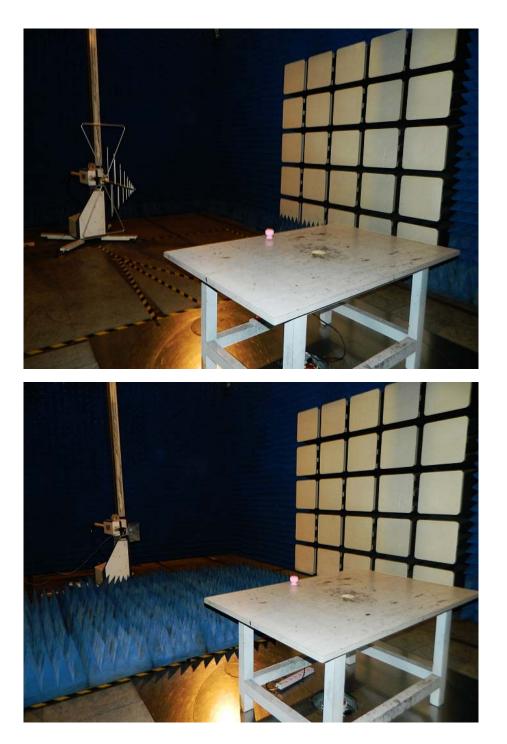


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Photos of the Product

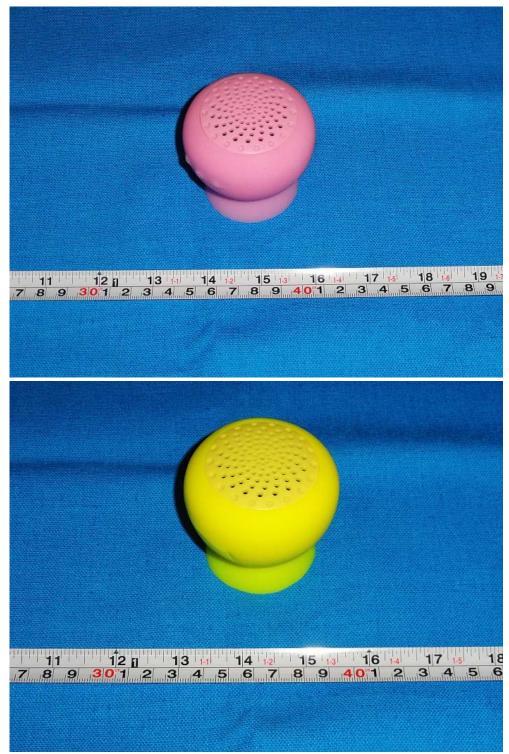

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



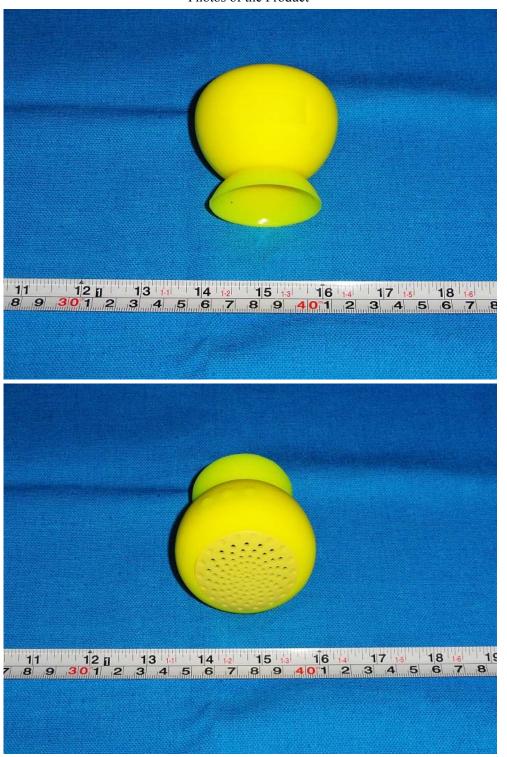

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.






The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Photos of the Product

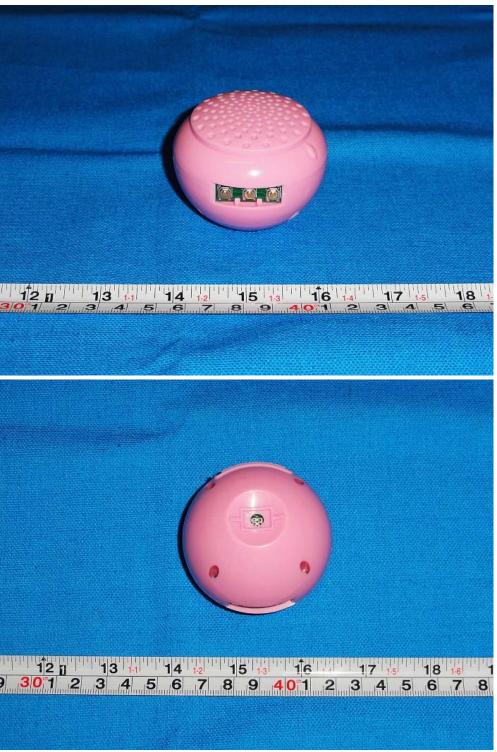


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Photos of the Product

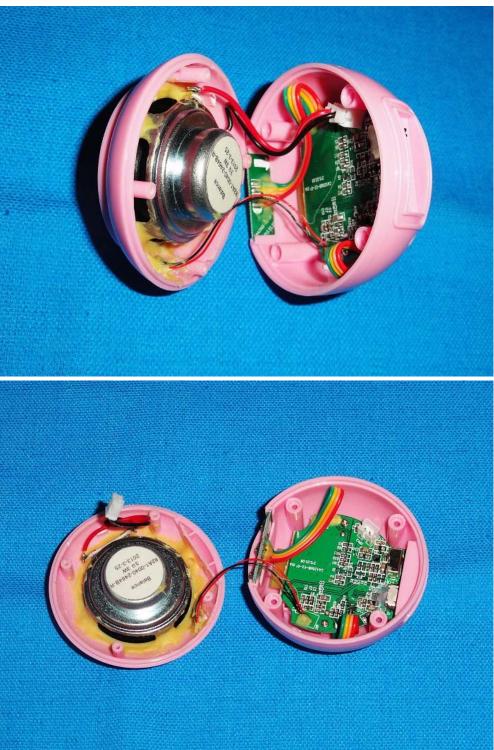



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Photos of the Product



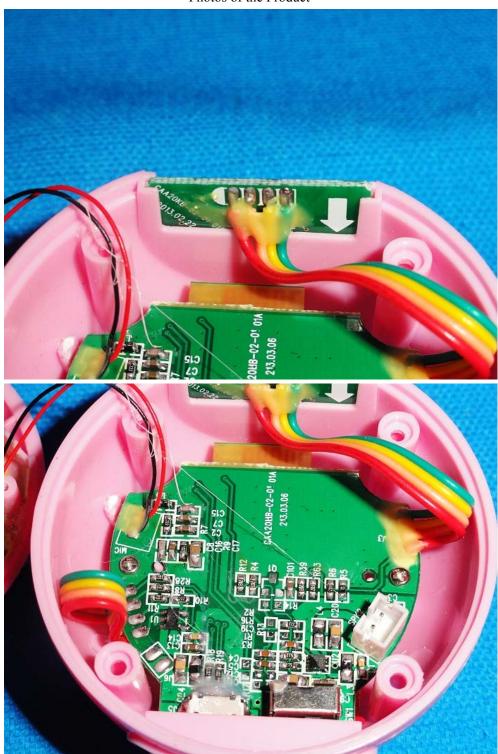

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Photos of the Product




The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Photos of the Product

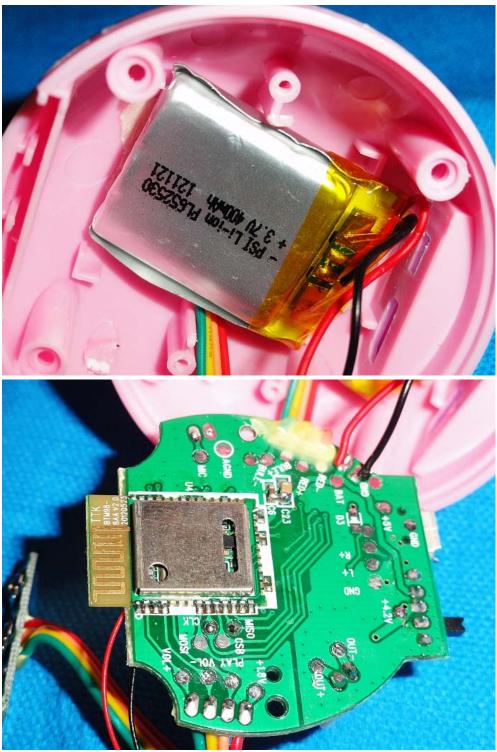


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Photos of the Product

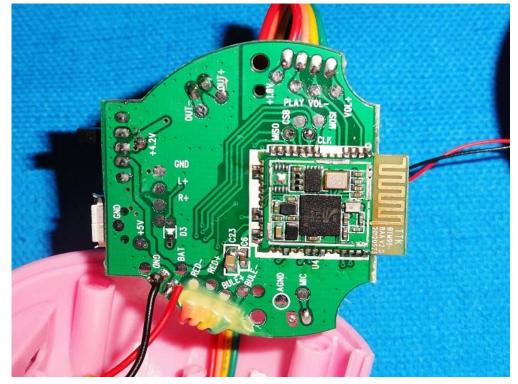

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the. Shenzhen HCT Technology Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen HCT Technology Co.,Ltd . to his customer. Supplier or others persons directly concerned. Shenzhen HCT Technology Co.,Ltd . will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.