

DATE: 06 October 2011

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Mobix Wireless Solutions Ltd.

Equipment under test:

nDnet Concentrator


C3000

Written by: 

D. Shidlovsky, Documentation

Approved by: 

A. Sharabi, Test Engineer

Approved by: 

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Mobix Wireless Solutions Ltd.

Equipment under test: nDnet Concentrator

FCC ID:Z2K3000

This report concerns: Original Grant: x

Class I change:

Class II change:

47CFR15 Section 15.249

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:
Ishaiahou Raz
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
Tel: +972-8-918-6117
Fax: +972-8-915-3101
Email: sraz@itl.co.il

Applicant for this device:
(different from "prepared by")
Ofir Applebaum
Mobix Wireless Solutions Ltd.
4 Hatnufa St.
Petach Tikva 4951
Israel
Tel: 972-73-222-5200
Fax: 972-73-222-5256
Email: ofir@mobix.com

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	4
1.1 Administrative Information.....	4
1.2 List of Accreditations	5
1.3 Product Description	6
1.4 Test Methodology	6
1.5 Test Facility	6
1.6 Measurement Uncertainty	6
2. SYSTEM TEST CONFIGURATION-----	7
2.1 Justification.....	7
2.2 EUT Exercise Software	7
2.3 Special Accessories	7
2.4 Equipment Modifications	7
2.5 Configuration of Tested System	7
3. CONDUCTED AND RADIATED MEASUREMENTS TEST SETUP PHOTOS -----	8
4. CONDUCTED EMISSION -----	9
4.1 Test Specification	9
4.2 Test Procedure	9
4.3 Test Results.....	9
4.4 Test Instrumentation Used, Conducted Measurement	14
5. AVERAGE FACTOR CALCULATION -----	15
5.1 Test Instrumentation Used	16
6. FIELD STRENGTH OF FUNDAMENTAL-----	17
6.1 Test Specification	17
6.2 Test Procedure	17
6.3 Test Results.....	17
6.4 Test Instrumentation Used, Field Strength of Fundamental	21
7. SPURIOUS RADIATED EMISSION 9 KHZ - 30 MHZ-----	22
7.1 Test Specification	22
7.2 Test Procedure	22
7.3 Test results	22
7.4 Test Instrumentation Used, Radiated Measurements 9 kHz – 30 MHz	23
7.5 Field Strength Calculation	23
8. SPURIOUS RADIATED EMISSION 30 MHZ- 10 GHZ-----	24
8.1 Test Specification	24
8.2 Test Procedure	24
8.3 Test Results.....	24
8.4 Test Instrumentation Used, Radiated Measurements 30 MHz – 10 GHz	26
8.5 Field Strength Calculation	26
9. BAND EDGE ATTENUATION -----	27
9.1 Test Specification	27
9.2 Test Procedure	27
9.3 Test Results.....	27
9.4 Test Instrumentation Used, Band Edge Attenuation	31
10. APPENDIX A - CORRECTION FACTORS -----	32
10.1 Correction factors for CABLE	32
10.2 Correction factors for CABLE	33
10.3 Correction factors for CABLE	34
12.6 Correction factors for LOG PERIODIC ANTENNA	35
10.4 Correction factors for LOG PERIODIC ANTENNA	36
10.5 Correction factors for BICONICAL ANTENNA	37
10.6 Correction factors for ACTIVE LOOP ANTENNA	38

1. General Information

1.1 Administrative Information

Manufacturer: Mobicx Wireless Solutions Ltd.

Manufacturer's Address: 4 Hatnufa St.,
Petah-Tikva, 49510
Israel
Tel:972 73-222-5200
Fax:972 73-222-5256

Manufacturer's Representative: Ofir Appelbaum

Equipment Under Test (E.U.T): nDnet Concentrator

Equipment Model No.: C3000

Equipment Serial No.: Not Designated

Date of Receipt of E.U.T: 13.04.11

Start of Test: 13.04.11

End of Test: 14.04.11

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15, Subpart C, Section
15.249

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The n-DNet™ Concentrator is a key component in managing segments of the Mobix patented n-Dimensional Network. On one end, the Concentrator controls communications with a cluster of up to 1000 meters and on the other end it connects to the MDM Server. The Concentrator communicates with the meters over the simultaneous RF and PLC n-Dimensional mesh network. Mobix advanced n-DNet™ technology provides unprecedented advantages in data availability, solution topology and price/performance.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) 0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

2. System Test Configuration

2.1 ***Justification***

The E.U.T. was tested in normal operation mode set to transmit in frequency of 915 MHz.

2.2 ***EUT Exercise Software***

The E.U.T. was operated with normal operation software version 1.915.t.

2.3 ***Special Accessories***

No special accessories were needed to achieve compliance.

2.4 ***Equipment Modifications***

No special modifications were needed to achieve compliance.

2.5 ***Configuration of Tested System***

The configuration of the tested system is described below.

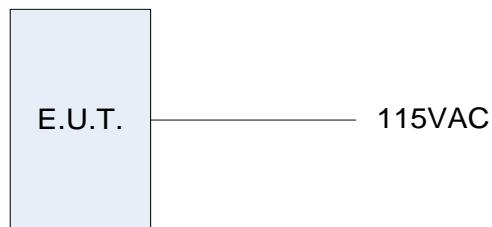


Figure 1. Configuration of Tested System

3. Conducted and Radiated Measurements Test Setup Photos



Figure 2. Conducted Emission Test



Figure 3. Radiated Emission Test

4. Conducted Emission

4.1 Test Specification

F.C.C., Part 15, Subpart C

4.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 3.1. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on an 0.8 meter high wooden table, 0.4 meter from the room's vertical wall.

The E.U.T was powered from 115 V AC / 60 Hz via a 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The center of the E.U.T AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits are loaded to the receiver via a 3.5" floppy disk and are displayed on the receiver's spectrum display.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, and using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

4.3 Test Results

JUDGEMENT: Passed by 4.8dB

The margin between the emission levels and the specification limit is, in the worst case, 4.8 dB for the phase line at 11.06 MHz and 16.7 dB at 4.06 MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 4* to *Figure 7*.

TEST PERSONNEL:

Tester Signature:  Date: 02.10.11

Typed/Printed Name: A. Sharabi

Conducted Emission

E.U.T Description nDnet Concentrator
 Type C3000
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C

Lead: Phase

Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.204934	52.1	47.5	-16.0	37.2	-16.2	0.0
2	0.438691	48.5	45.8	-11.4	36.8	-10.3	0.0
3	3.751044	42.0	37.7	-18.3	29.9	-16.1	0.0
4	8.501745	33.9	29.6	-30.4	21.4	-28.6	0.0
5	11.060667	45.6	45.2	-14.8	45.2	-4.8	0.0
6	22.123711	32.7	30.3	-29.7	26.8	-23.2	0.0

Figure 4. Detectors: Peak, Quasi-peak, Average

Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description nDnet Concentrator
 Type C3000
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C

Lead: Phase

Detectors: Peak, Quasi-peak, Average

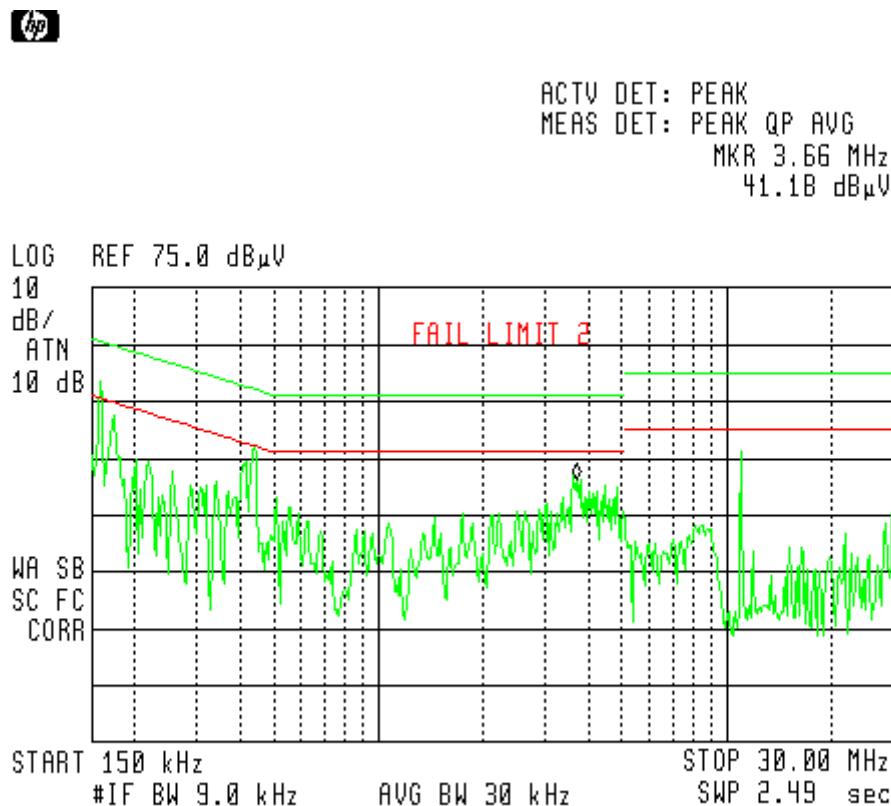


Figure 5. Detectors: Peak, Quasi-peak, Average

Note: Fail indication on the spectral plot results from peak detector level reading above the limit. This indication is for information only and it should not be interpreted as a test failure.

Conducted Emission

E.U.T Description nDnet Concentrator
 Type C3000
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C

Lead: Neutral

Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.217012	51.0	45.4	-17.6	31.5	-21.5	0.0
2	0.568882	36.4	33.4	-22.6	25.1	-20.9	0.0
3	1.442669	35.2	31.2	-24.8	22.3	-23.7	0.0
4	4.063156	41.6	37.3	-18.6	29.3	-16.7	0.0
5	8.674081	35.2	30.1	-29.9	22.3	-27.7	0.0
6	16.498817	29.7	28.4	-31.6	27.5	-22.5	0.0

Figure 6. Detectors: Peak, Quasi-peak, AVERAGE .

Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description nDnet Concentrator
 Type C3000
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C

Lead: Neutral

Detectors: Peak, Quasi-peak, Average

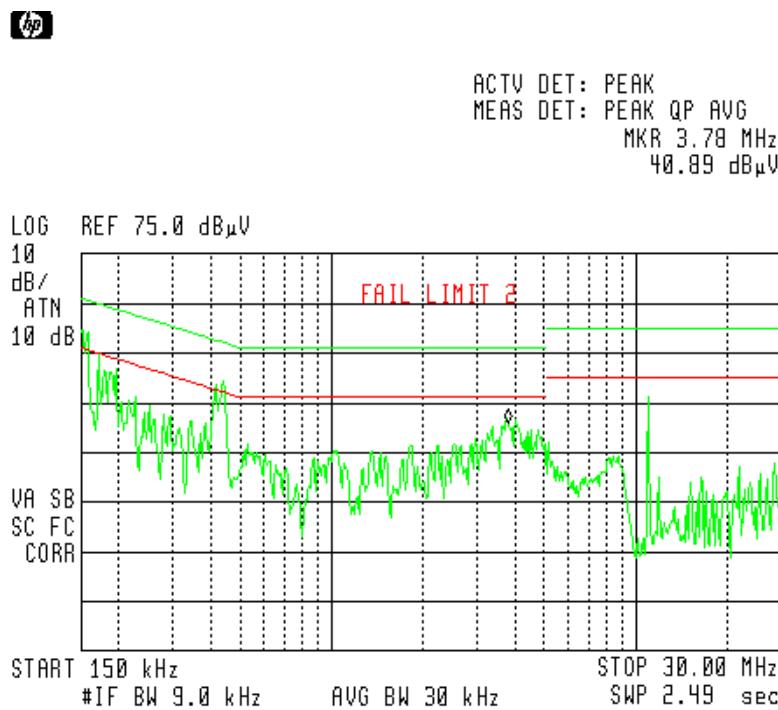


Figure 7. Detectors: Peak, Quasi-peak, AVERAGE .

Note: Fail indication on the spectral plot results from peak detector level reading above the limit. This indication is for information only and it should not be interpreted as a test failure.

4.4 **Test Instrumentation Used, Conducted Measurement**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
LISN	Fischer	FCC-LISN-2A	127	March 3, 2011	1 Year
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Filter Section	HP	85420E	3705A00248	November 24, 2010	1 Year
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

5. Average Factor Calculation

1. Burst duration = 64msec
2. Time between bursts = 10sec >100msec
3. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

$$\text{Average Factor} = 20 \log \left[\frac{64}{100} \times 1 \right] = -3.87 \text{dB}$$

NOTE – [Pulse duration /Pulse period] considered 1 as worst case since unit operates with FSK Modulation

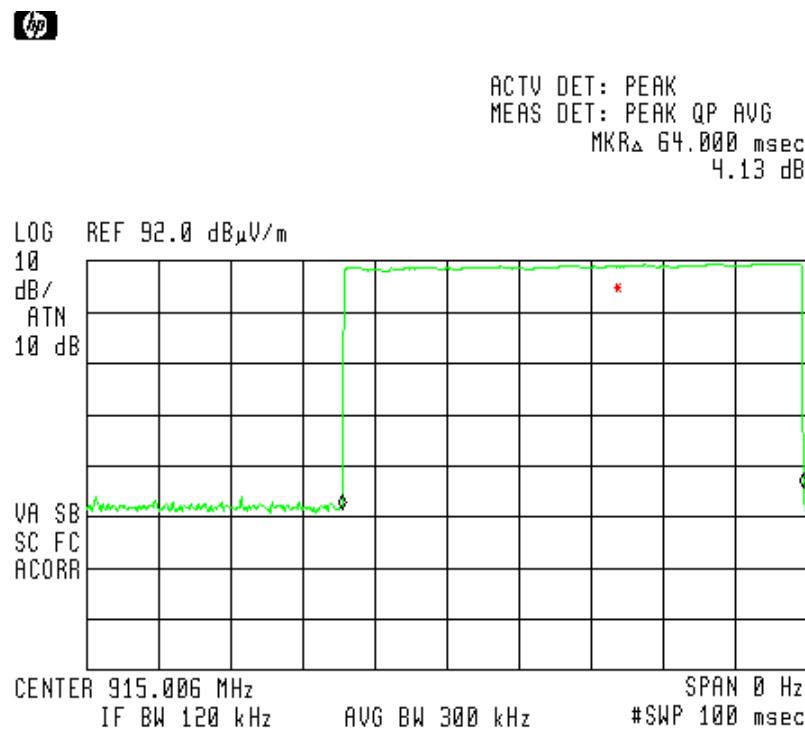


Figure 8. Burst duration within 100msec

5.1 **Test Instrumentation Used**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Filter Section	HP	85420E	3705A00248	November 24, 2010	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

6. Field Strength of Fundamental

6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(a)

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (915.0 MHz) and Peak Detection. The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver. The measurement was performed for vertical and horizontal polarizations of the test antenna.

6.3 Test Results

JUDGEMENT: Passed by 6.10 dB

The EUT met the FCC Part 15, Subpart C, Section 15.249(a) specification requirements.

See additional details in *Figure 9* to *Figure 11*.

TEST PERSONNEL:

Tester Signature: 

Date: 02.10.011

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description nDnet Concentrator
 Model Number C3000
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq. (MHz)	Pol. V/H	Peak Reading (dB μ V/m)	Average Result (dB μ V/m)	Specification (dB μ V/m)	Margin (dB)
915.0	H	89.77	85.9	93.98	-8.08
915.0	V	91.75	87.88	93.98	-6.10

Figure 9. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes “Correction Factors.

“Correction Factors” = Antenna Correction Factor + Cable Loss.

“Average Result” = Peak Reading + Average Factor

Field Strength of Fundamental

E.U.T Description nDnet Concentrator
 Model Number C3000
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(a)

Antenna Polarization: Vertical

Test Distance: 3 meters

Detector: Peak

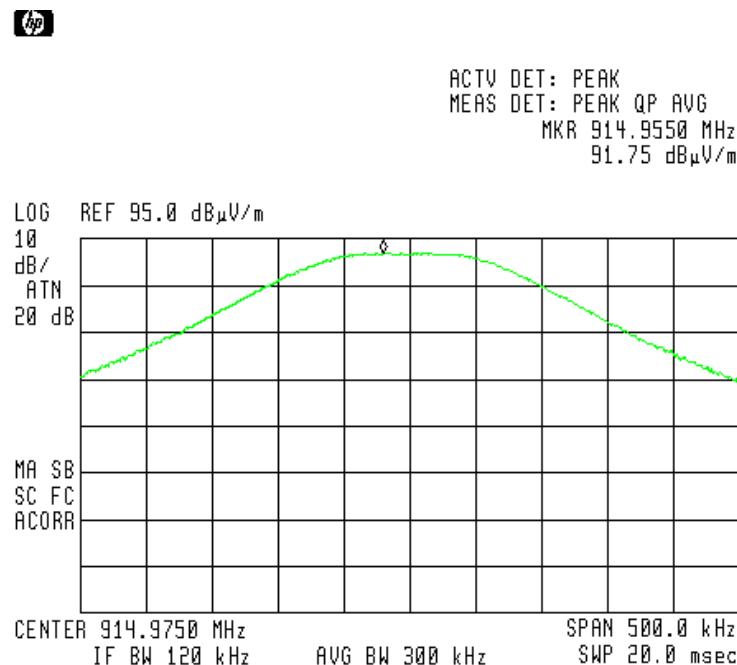


Figure 10. Antenna polarization vertical

Field Strength of Fundamental

E.U.T Description nDnet Concentrator
 Model Number C3000
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal

Test Distance: 3 meters

Detector: Peak

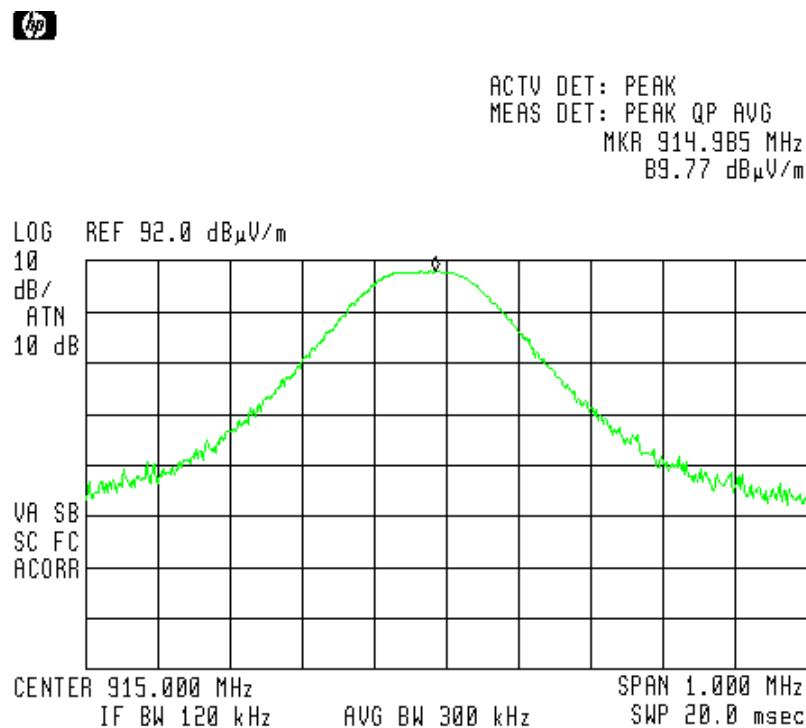


Figure 11. Antenna polarization horizontal

6.4 **Test Instrumentation Used, Field Strength of Fundamental**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7. Spurious Radiated Emission 9 kHz - 30 MHz

7.1 ***Test Specification***

F.C.C., Part 15, Subpart C, Section 15.249(b)

7.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 9kHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30 MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter.

The E.U.T. was operated in continuous transmission to enable better detection of signals.

7.3 ***Test results***

JUDGEMENT: Passed

No signals were detected in the frequency range of 9 kHz – 30 MHz.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 15.249 specification.

TEST PERSONNEL:

Tester Signature: 

Date: 02.10.11

Typed/Printed Name: A. Sharabi

7.4 **Test Instrumentation Used, Radiated Measurements 9 kHz – 30 MHz**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 year
RF Section	HP	85420E	3705A00248	November 24, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

7.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
 RA: Receiver Amplitude [dB μ V]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

8. Spurious Radiated Emission 30 MHz- 10 GHz

8.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(b)

8.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The emission levels were compared to the requirement of Section 15.249.

In the frequency range 30 MHz - 2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 - 10 GHz, a spectrum analyzer including a low noise amplifier was used. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.).

The test distance was 3 meters.

8.3 Test Results

JUDGEMENT: Passed by 7.76 dB

The margin between the emission level and the specification limit is 7.76 B in the worst case at the frequency of 1829.00 MHz, vertical polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C Section 15.249, specification.

TEST PERSONNEL:

Tester Signature: 

Date: 02.10.11

Typed/Printed Name: A. Sharabi

Spurious Radiated Emission 30 MHz- 10 GHz

E.U.T Description: nDnet Concentrator
 Type: C3000
 Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 10.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 915.0 MHz

Freq. (MHz)	Pol. V/H	Peak Reading (dB μ V/m)	Average Results (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
1829.00	V	49.9	46.03	53.79	-7.76
1829.00	H	45.4	41.53	53.79	-12.26

Figure 12. Spurious Radiated Emission

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

“Average Results” = Peak Reading + Average Factor

8.4 Test Instrumentation Used, Radiated Measurements 30 MHz – 10 GHz

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Filter Section	HP	85420E	3705A00248	November 24, 2010	1 Year
Antenna Biconical	ETS	3109	002-3244	August 1, 2010	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 Year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 27, 2011	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 5, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 21, 2011	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

8.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]
 RA: Receiver Amplitude [dB μ v]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

9. Band Edge Attenuation

9.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(e)

9.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency and Peak Detection. The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver. The measurement was performed for vertical and horizontal polarizations of the test antenna.

9.3 Test Results

JUDGEMENT: Passed by 0.01 dB

The EUT met the FCC Part 15, Subpart C, Section 15.249(e) specification requirements.

See additional details in *Figure 13* to *Figure 15*.

TEST PERSONNEL:

Tester Signature: 

Date: 02.10.11

Typed/Printed Name: A. Sharabi

Band Edge Attenuation

E.U.T Description nDnet Concentrator
Model Number C3000
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(e)

Freq. (MHz)	Reading (dBc)	Specification (dBc)	Margin (dB)
916.56	50.01	50	-0.01
913.57	50.18	50	-0.18

Figure 13. Band Edge Attenuation

Band Edge Attenuation

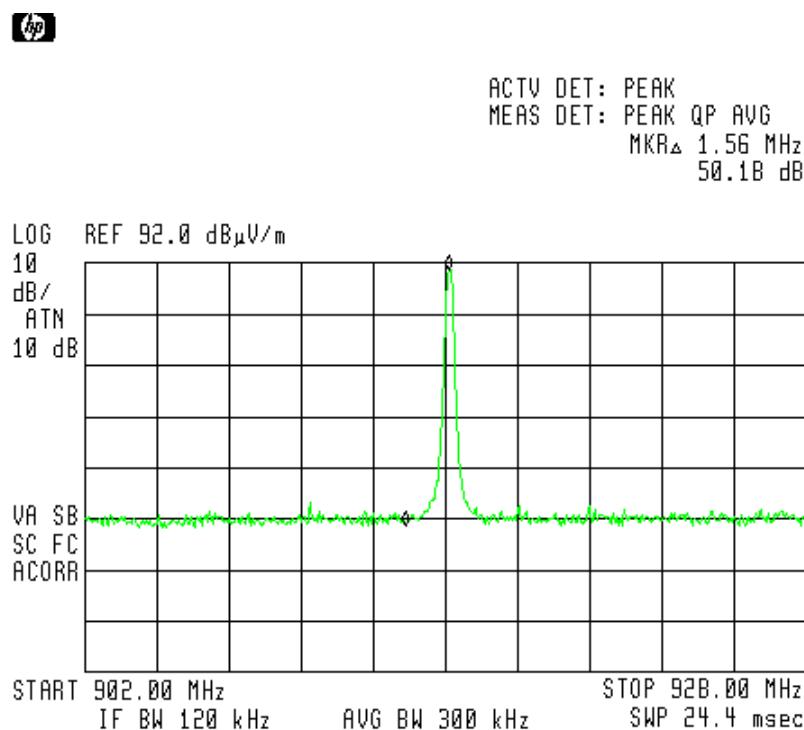


Figure 14. Band Edge Attenuation

Band Edge Attenuation

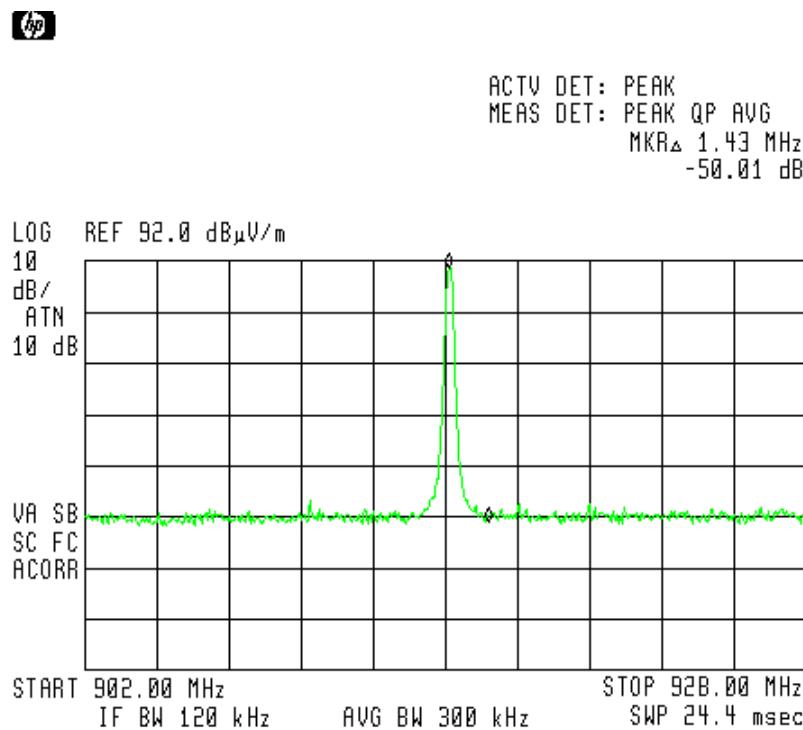


Figure 15. Band Edge Attenuation

9.4 **Test Instrumentation Used, Band Edge Attenuation**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	November 24, 2010	1 Year
RF Filter Section	HP	85420E	3705A00248	November 24, 2010	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

10. APPENDIX A - CORRECTION FACTORS

**10.1 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

10.2 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

10.3 Correction factors for

CABLE from spectrum analyzer to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

12.6 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

10.4 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

10.5 Correction factors for BICONICAL ANTENNA
Type 3109,
at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
30.0	13.3
40.0	12.7
50.0	11.0
60.0	9.2
70.0	10.0
80.0	7.2
90.0	7.9
100.0	9.4
120.0	11.9
140.0	13.1
160.0	12.3
180.0	12.4
200.0	14.8
250.0	15.3
300.0	17.9

NOTE:

1. Antenna serial number is 002-3244.

10.6 Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2