

FCC PART 15.249

TEST REPORT

For

Serene Innovations Inc.

14731 Carmenita Road, Norwalk, CA 90650, USA

FCC ID: Z33-CA3

Report Type: Original Report	Product Type: Central Alert Remote
Test Engineer: Allan An	<i>Allan An</i>
Report Number: RSZ110922004-00	
Report Date: 2011-12-12	
Reviewed By: Alvin Huang EMC Engineer	<i>Alvin Huang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....3

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

 OBJECTIVE3

 RELATED SUBMITTAL(S)/GRANT(S).....3

 TEST METHODOLOGY3

 TEST FACILITY3

SYSTEM TEST CONFIGURATION.....5

 DESCRIPTION OF TEST CONFIGURATION5

 EQUIPMENT MODIFICATIONS5

 CONFIGURATION OF TEST SETUP5

 BLOCK DIAGRAM OF TEST SETUP5

SUMMARY OF TEST RESULTS6

FCC §15.203 - ANTENNA REQUIREMENT.....7

 APPLICABLE STANDARD7

 ANTENNA CONNECTOR CONSTRUCTION7

FCC §15.205, §15.209 & §15.249 - RADIATED EMISSIONS8

 APPLICABLE STANDARD8

 MEASUREMENT UNCERTAINTY8

 TEST EQUIPMENT SETUP8

 EUT SETUP9

 TEST PROCEDURE9

 CORRECTED AMPLITUDE & MARGIN CALCULATION9

 TEST EQUIPMENT LIST AND DETAILS.....10

 TEST DATA10

PRODUCT SIMILARITY DECLARATION LETTER.....12

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Serene Innovations, Inc.*'s product, model number: *CA-DB (FCC ID: Z33-CA3)*, or the "EUT" in this report was a *Central Alert Remote*, which was measured approximately: 8.2 cm (L) x 4.0 cm (W) x 2.2 cm (H), rated input voltage: DC 3V battery, the device operates in 2.4 GHz ISM band.

Note: The series product, model CA-DB and CA-SOS are electrically identical, they have the same PCB layout and schematic, we select CA-DB for fully testing, which was explained for details in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 1109067 (Assigned by BACL, Shenzhen). The EUT was received on 2011-09-22.*

Objective

This report is prepared on behalf of *Serene Innovations, Inc.* in accordance with Part 2, Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

No related submittal.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation on emissions measurement is ± 4.0 dB

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a testing mode.


Equipment Modifications

No modification was made to the EUT tested.

Configuration of Test Setup



Block Diagram of Test Setup

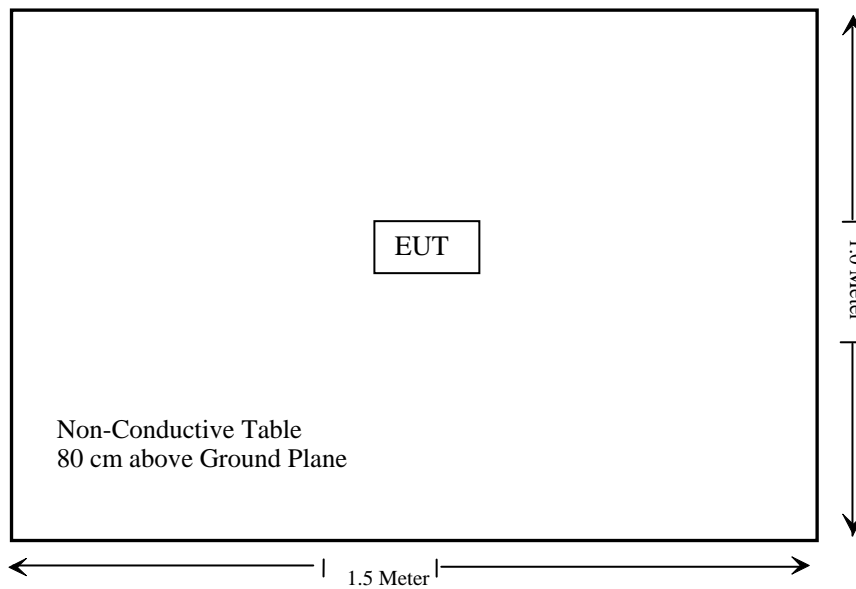

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conducted Emissions	N/A*
§15.209, §15.249	Radiated Emissions	Compliance

Note: N/A* The EUT was powered by battery only.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has a PCB antenna which complies with FCC antenna requirement of §15.203.

Result: Compliance, please refer to the EUT photos.

FCC §15.205, §15.209 & §15.249 - RADIATED EMISSIONS

Applicable Standard

As per FCC §15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB.

Test Equipment Setup

The spectrum analyzer or receiver is set as:


Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

$$\begin{aligned} \text{Peak: RBW} &= 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto} \\ \text{Average: RBW} &= 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto} \end{aligned}$$

EUT Setup

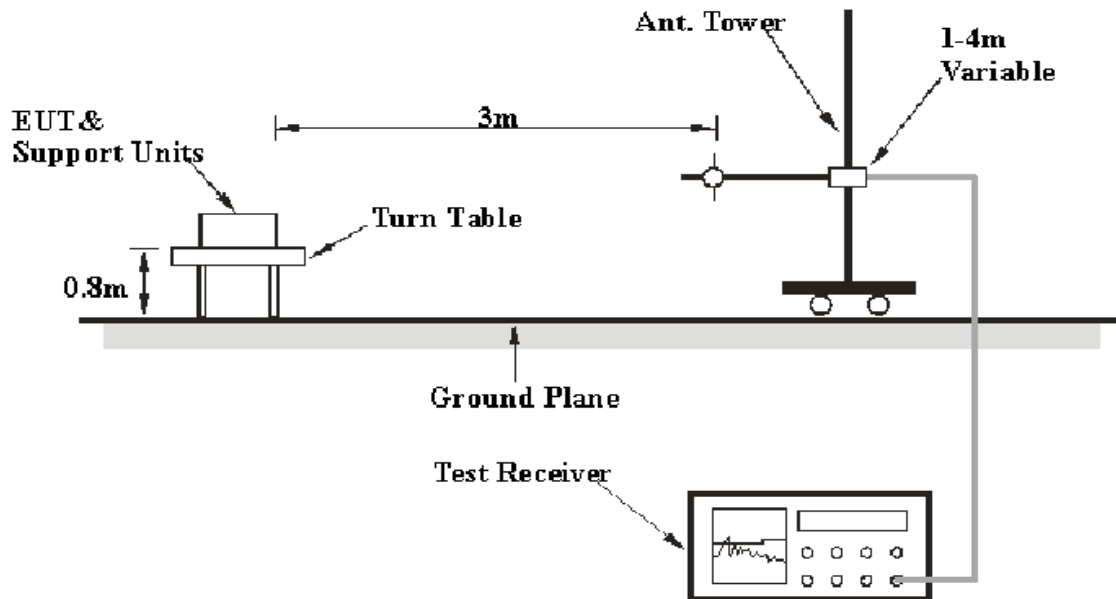

The radiated emission and out of band emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC §15.209 and FCC §15.249 limits.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 mete, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-03-11	2012-03-10
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07
Agilent	Spectrum Analyzer	8564E	3943A01781	2011-04-12	2012-04-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2011-05-05	2012-05-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa

The testing was performed by Allan An on 2011-10-27.


Test Mode: Transmitting

30 MHz – 25 GHz:

Indicated		Detector (PK/Ave.)	Table Angle Degree	Test Antenna		Correction Factor			FCC 15.249/15.205/15.209			
Frequency (MHz)	S.A. Reading (dBµV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
2422	85.98	PK	125	1.6	V	30.3	3.03	27.54	91.77	114	22.23	Fund.
2422	85.15	PK	186	1.6	H	30.9	3.03	27.54	91.54	114	22.46	Fund.
2422	72.46	Ave.	125	1.6	V	30.3	3.03	27.54	78.25	94	15.75	Fund.
2422	73.79	Ave.	186	1.6	H	30.9	3.03	27.54	80.18	94	13.82	Fund.
4844	33.45	Ave.	360	1.8	H	36.3	4.30	27.51	46.54	54	7.46	harmonic
4844	34.71	Ave.	122	1.6	V	35	4.30	27.51	46.50	54	7.50	harmonic
4844	51.01	PK	360	1.8	H	36.3	4.30	27.51	64.10	74	9.90	harmonic
4844	55.12	PK	122	1.6	V	35	4.30	27.51	66.91	74	7.09	harmonic
7266	31.00	Ave.	145	1.7	V	39.2	5.22	27.46	47.96	54	6.04	harmonic
7266	30.57	Ave.	180	1.5	H	38	5.22	27.46	46.33	54	7.67	harmonic
7266	44.12	PK	180	1.7	V	38	5.22	27.46	59.88	74	14.12	harmonic
7266	41.45	PK	145	1.5	H	39.2	5.22	27.46	58.41	74	15.59	harmonic

Note: The data below 20 dB of the limit was not recorded.

Band Edge:

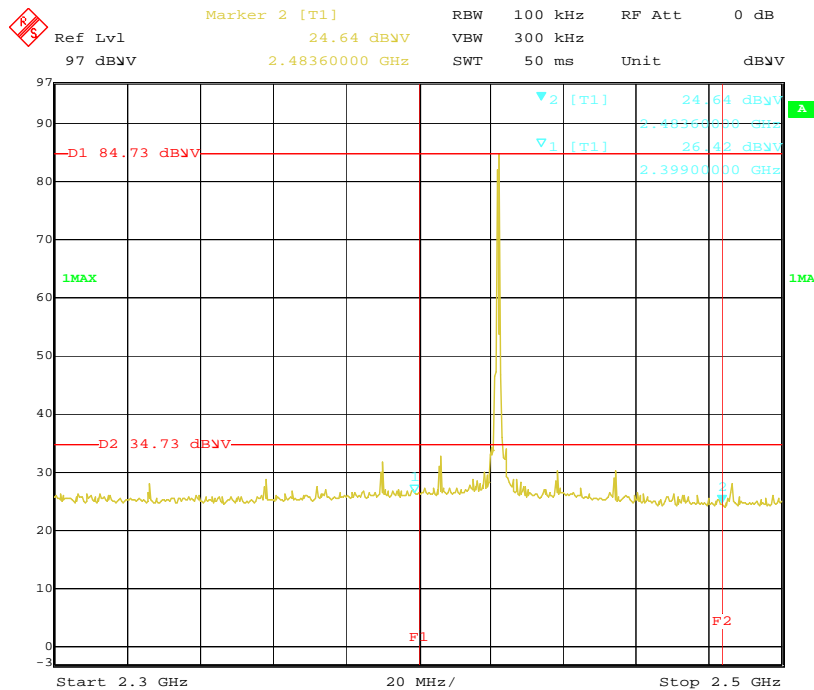

PRODUCT SIMILARITY DECLARATION LETTER



Serene Innovations Inc.
Add:14731 Carmenita Road, Norwalk, CA, USA
Tel:(562) 407 5400 Fax: (562) 483 2087

Date:2011-12-14

Product Similarity Declaration

To Whom It May Concern,

We Serene Innovations Inc. hereby declare that our Central Alert Remote Model Number: CA-SOS is electrically identical with the CA-DB that was certified by BACL. They are just different in model number. due to marketing purposes.

Please contact me if you have any question.

Sincerely,

A handwritten signature in black ink, appearing to read "Peter Lee", is written over a horizontal line. The signature is fluid and cursive, with a large loop at the end. Below the signature, the name "Peter Lee" and the title "Vice President" are printed in a standard sans-serif font.

Peter Lee
Vice President

***** END OF REPORT *****