

# FCC Test Report

## (TR-1108-013-01)

**Applicant** : Raiing Medical Company

**Address** : Room 408,Building 11,Huatong Road,Changping Science  
And Technology Park, Beijing, China

**Manufacturer** : Raiing Medical Company

**Address** : Room 408,Building 11,Huatong Road,Changping Science  
And Technology Park, Beijing, China

**Product Name** : Wireless Thermometer

**Trademark** : Raiing

**Model(s)** : WTM-BT30-I

**Standard(s)** : FCC Part 15 Subpart C



**Test Result** : Pass

**Date of Test** : Dec 19, 2011 to Mar 15, 2012

**Report issued Dated** : Mar 15, 2012

The report shall not be reproduced except in full, without the written approval of the TDK EMC Center.

The results in this report apply only to the sample(s) tested. The production units are required to conform to the initial sample as received when the units are placed in the market.

Responsible Engineer	:  Phenix Zhang	Approved by	:  CHAN king-chui
Date	: 2012.03.15	Date	: 2012.03.15

---

## Table of Contents

<b>Description</b>	<b>Page</b>
<b>1. Description of the Test Site</b> .....	<b>3</b>
1.1 Test Site Location: .....	3
1.2 Site Registration .....	3
1.3 Test Scope.....	3
<b>2. Description of the Tested Samples</b> .....	<b>4</b>
2.1 Customer Information .....	4
2.2 Identification of EUT .....	4
2.3 Spec of EUT .....	4
2.4 Test Standards List.....	4
<b>3. Test Specifications</b> .....	<b>5</b>
3.1 Standard(s) Used .....	5
3.2 Deviations from the Test Specification .....	5
3.3 Test mode .....	5
<b>4. Test Result</b> .....	<b>6</b>
4.1 Antenna Requirement.....	6
4.2 Conducted Emission (mains).....	7
4.3 Hopping Channel Bandwidth.....	10
4.4 Hopping Channel Separation.....	13
4.5 Number of Hopping Frequency .....	16
4.6 Dwell Time of Each Frequency .....	18
4.7 Maximum Peak Output Power .....	23
4.8 Band Edges Emission.....	26
4.9 Spurious Radiated Emission .....	33
<b>5. FCC ID Label</b> .....	<b>47</b>
<b>5. Test Setup</b> .....	<b>48</b>
5.1 Ancillary and Accessory Equipment Used .....	48
5.2 Photographs of the Test Configuration .....	49
5.3 Photographs of the EUT .....	50
<b>6. Equipment List</b> .....	<b>53</b>
<b>7. Test Uncertainty</b> .....	<b>54</b>
<b>8. Appendix</b> .....	<b>54</b>
8.1 Confirmation of Compliance within the Limits .....	54
8.2 Compliance Statements.....	55

## 1. Description of the Test Site

### 1.1 Test Site Location:

Laboratory : TDK South China EMC Center  
SAE Technologies Development (Dongguan) Co.,  
Ltd. Changan Branch  
Address : Zhenan Hi-tech Industrial Park, Dongguan City,  
Guangdong Province, China  
Phone no. : (86)-769-8564-4678  
Fax no. : (86)-769-8564-4499  
Email : [emc@cn.tdk.com](mailto:emc@cn.tdk.com)

### 1.2 Site Registration

VCCI (November, 2011) : Reg. No. R-3733, C-4184  
FCC site registration (August, 2011) : Reg. No. 732901  
IC registration : Reg. No. 7993  
CNAS(August, 2010) : Reg. No. L4677

### 1.3 Test Scope

EMC and RF testing according to national / international standards

## 2. Description of the Tested Samples

### 2.1 Customer Information

Customer : Raiing Medical Company  
Address : Room 408,Building 11,Huatong Road,Changping Science  
And Technology Park, Beijing, China  
Phone no. : +86-10-64118658  
Fax no. : N/A

### 2.2 Identification of EUT

Trademark : Raiing  
Model(s) : Wireless Thermometer  
Serial No. : None

### 2.3 Spec of EUT

Description of Antenna : fixed, built-in antenna, 0.5dBi  
Operation Frequency : 2402 MHz ~ 2480 MHz  
Number of Channels : 79  
Type of Modulation : FHSS  
Power Supply : Internal Li-ion battery, DC3.7V  
Bluetooth protocol compliant : This product only supports 1Mbps data rate from GFSK modulation without 2M/3M data rate function.

### 2.4 Test Standards List

FCC Part 15 (2010)

American national standard for methods of measurement of radio noise emissions from low-voltage electrical and electronic equipment in the range of 9KHz to 40GHz.

FCC PUBLIC NOTICE DA 00-705

Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

### 3. Test Specifications

#### 3.1 Standard(s) Used

FCC Rules	Description Of Test	Result
15.203/15.247(b)	Antenna Requirement	Pass
15.207	Conducted Emission	Pass
15.247(a)(1)	Hopping Channel Bandwidth	Pass
15.247(a)(1)	Hopping Channel Separation	Pass
15.247(a)(1)	Number of Hopping Frequency Used	Pass
15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
15.247(b)(1)	Maximum Peak Output Power	Pass
15.247(d)	Band Edges Emission	Pass
15.247(d)	Spurious Radiated Emission	Pass

#### 3.2 Deviations from the Test Specification

N/A

#### 3.3 Test mode

This EUT is portable device. In the pretest, we have made prescan for X/Y/Z directions. The worst case has chosen for the final test which is the X direction (horizontal).

## 4. Test Result

### 4.1 Antenna Requirement

#### 4.1.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna James or electrical connector is prohibited.

Section 15.247(b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.1.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.


Transmitter antenna of directional gain is 0.5dBi.

## 4.2 Conducted Emission (mains)

### 4.2.1 Test Summary

Test Room	:	Shielded Room
Power Source	:	AC 120V / 60Hz
Standards:	:	FCC Part15 B : 2009
EUT Type	:	Table Top
EUT configuration	:	EUT's highest possible emission level

### 4.2.2 Block diagram of test setup

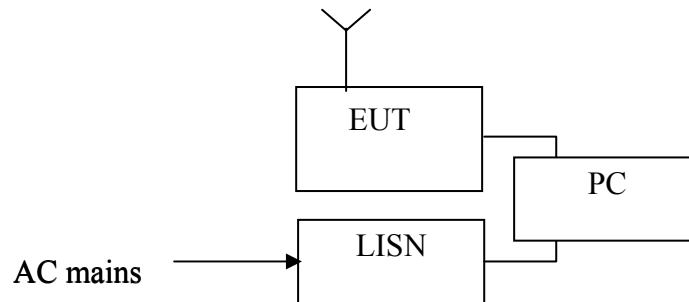

### 4.2.3 Measurement method

The EUT along with its peripherals were placed on a 1.0m (W) x 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4m space from a vertical reference plane. The EUT was connected to power mains through a Artificial Mains Network(AMN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.

The excess power cable between the EUT and the AMN was bundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

## 4.2.4. Result

**PASS**



2011-12-21 19:00:58

Conducted EmissionTDK South China EMC Centre  
Date : 2011-12-21 19:00:54

Trade Name : Raiing  
Model Name : WTM-BT30-1  
Product Name : Wireless Thermometer  
Test condition : normal

Document No. :  
Power Supply : AC 120V/60Hz  
Temp/Humi : 25deg / 52%RH  
Operator : YongSheng Pang

Memo :  
LIMIT : FCC Part 15 B QP  
FCC Part 15 B AV

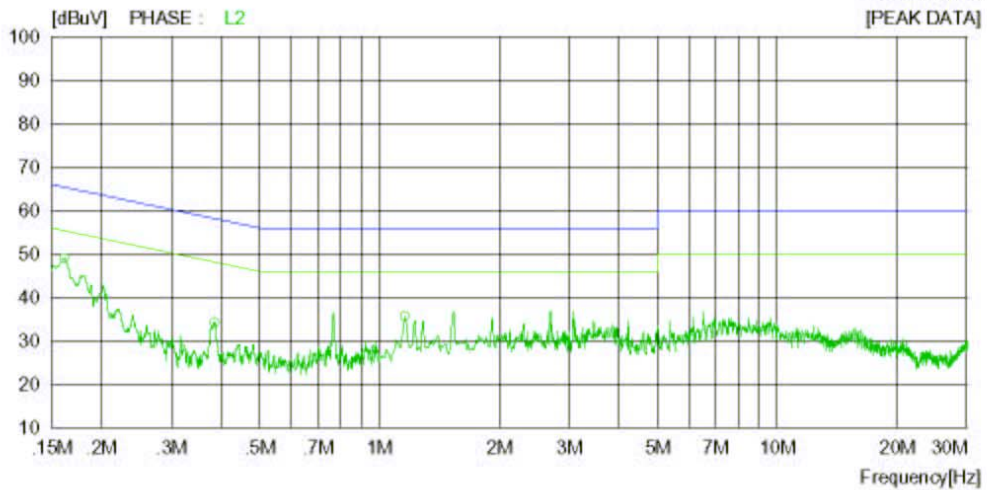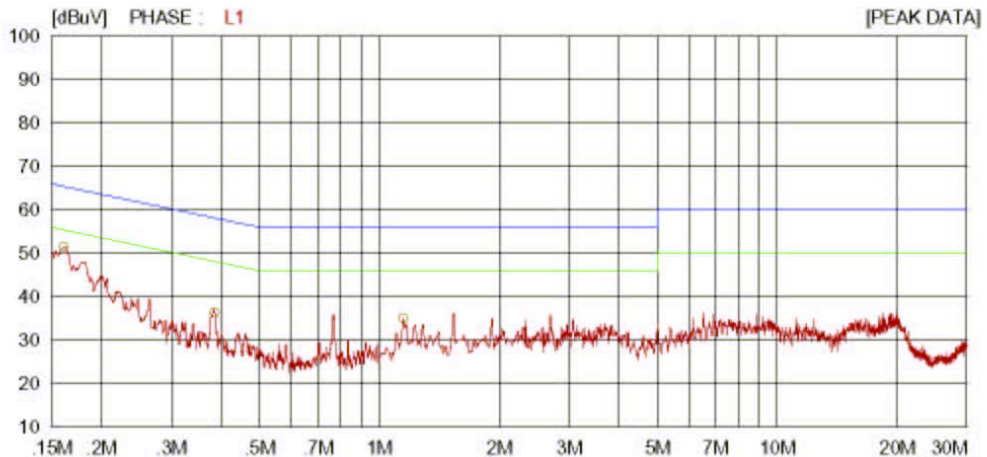

TDK South China EMC Centre Tell:0769-8564-4678 Fax:0769-8564-4499



2011-12-21 19:00:58

## Conducted Emission

TDK South China EMC Centre  
Date : 2011-12-21 19:00:54

Trade Name : Raiing  
Model Name : WTM-BT30-1  
Product Name : Wireless Thermometer  
Test condition : normal

Document No. :  
Power Supply : AC 120V/60Hz  
Temp/Humi : 25deg / 52%RH  
Operator : YongSheng Pang

Memo :

LIMIT : FCC Part 15 B QP  
FCC Part 15 B AV

NO	FREQ [MHz]	READING(PK) [dBuV]	C.F [dB]	RESULT [dBuV]	LIMIT		MARGIN		PHASE
					QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
1	0.16100	41.5	10.0	51.5	65.4	55.4	13.9	3.9	L1
2	0.38600	26.4	10.0	36.4	58.1	48.1	21.7	11.7	L1
3	1.15000	25.1	9.9	35.0	56.0	46.0	21.0	11.0	L1
4	0.16200	39.0	10.0	49.0	65.4	55.4	16.4	6.4	L2
5	0.38600	24.3	9.9	34.2	58.1	48.1	23.9	13.9	L2
6	1.16000	25.7	9.9	35.6	56.0	46.0	20.4	10.4	L2


TDK South China EMC Centre    Tell:0769-8564-4678    Fax:0769-8564-4499

### 4.3 Hopping Channel Bandwidth

#### 4.3.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 4.2.2 Block diagram of test setup



Spectrum

**Connection method:** delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The  $Z_c$  of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.


#### 4.2.3 Measurement method

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Measure spectrum width with level more than 20dB below the peak level.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.


## 4.2.4. Result

Temperature ( ) : 22~23	EUT: Wireless Thermometer
Humidity (%RH) : 50~54	M/N: WTM-BT30-I
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode
Test data: Jan 07, 2012	Test engineer: Phenix


Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
LOW	2402	365	>25
MID	2442	365	>25
HIG	2480	370	>25

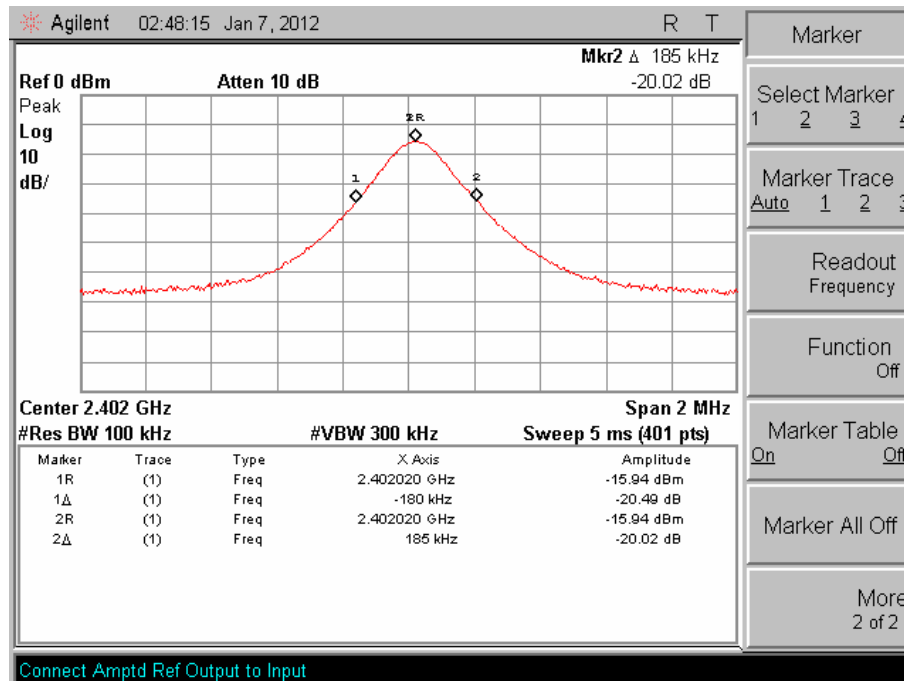**Channel LOW :**


**Channel MID :**

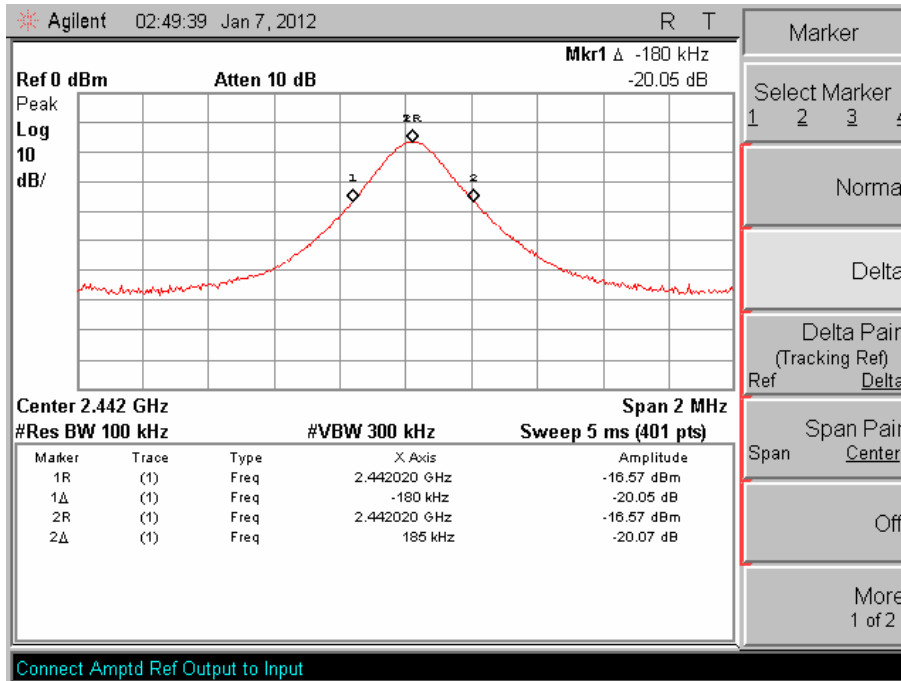

**Channel HIG :**

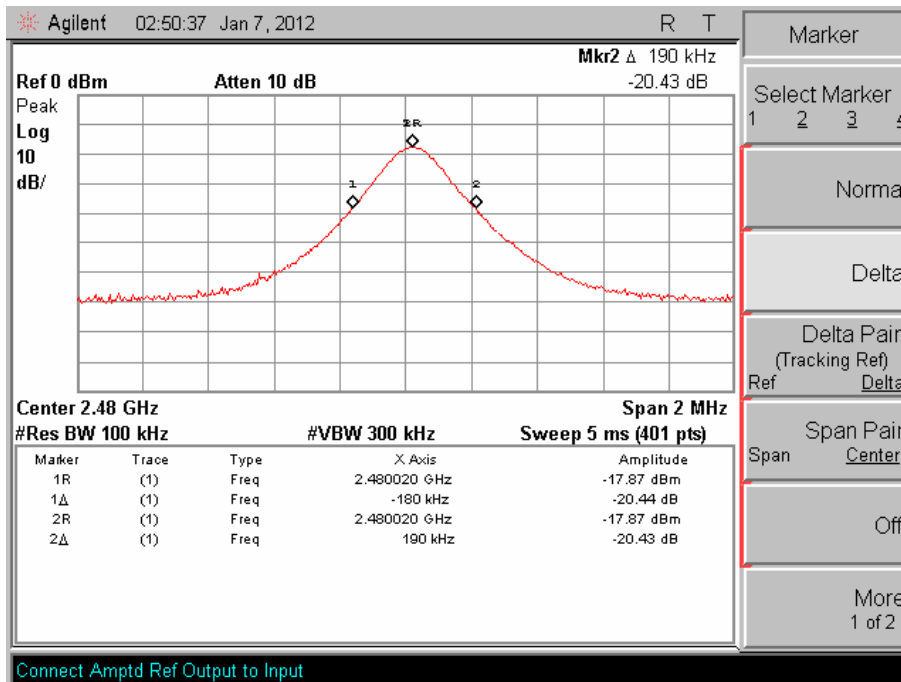


## 4.4 Hopping Channel Separation

### 4.4.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 4.4.2 Block diagram of test setup

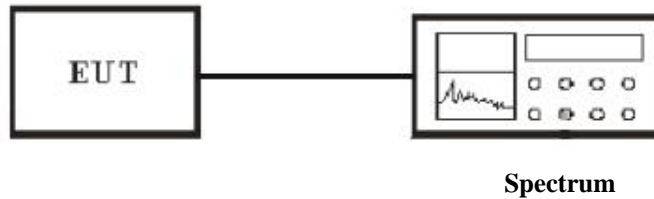

**Connection method:** delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The  $Z_c$  of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

### 4.4.3 Measurement method


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

## 4.4.4. Result


Temperature ( ): 22~23	EUT: Wireless Thermometer
Humidity (%RH): 50~54	M/N: WTM-BT30-I
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode
Test data: Jan 07, 2012	Test engineer: Phenix

Channel No.	Frequency (MHz)	Channel Separation (MHz)	20dB Bandwidth (kHz)
LOW(channel 1)	2402	1.0	365
MID(channel 40)	2442	1.0	365
HIG(channel 79)	2480	1.0	370


## Channel Low :

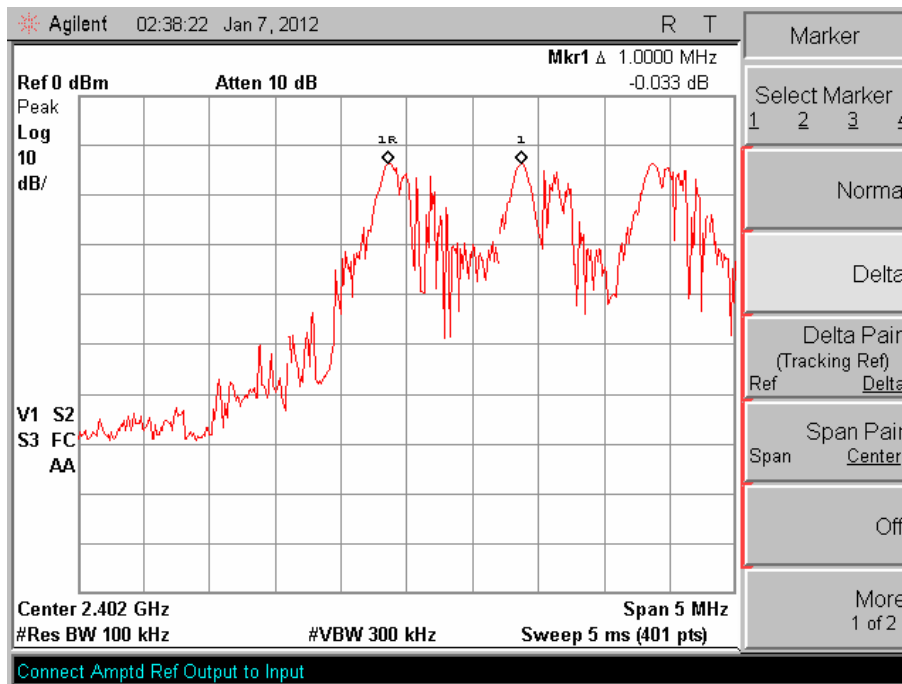

**Channel MID :**

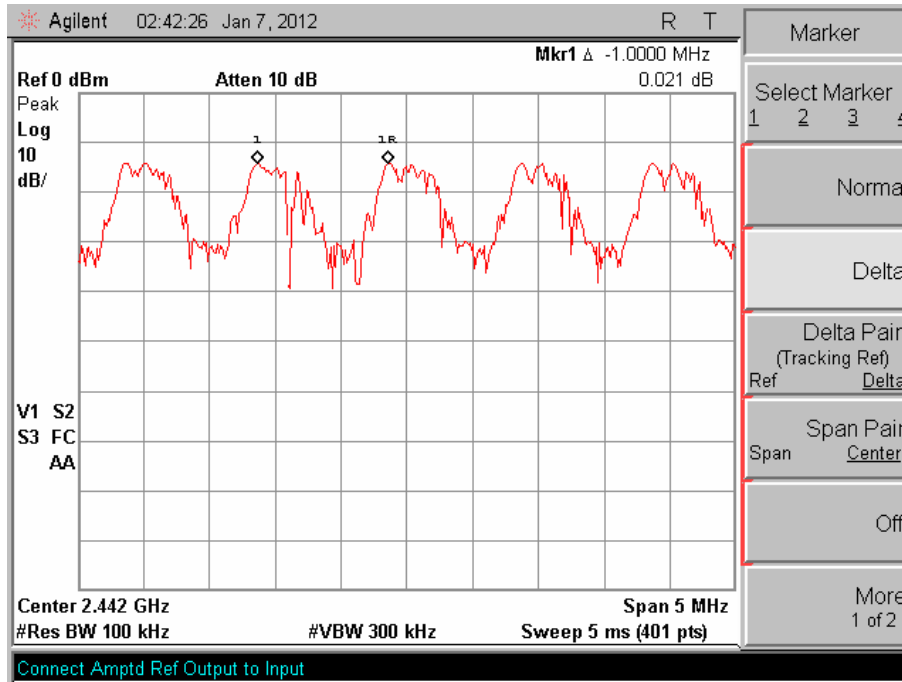

**Channel HIG :**

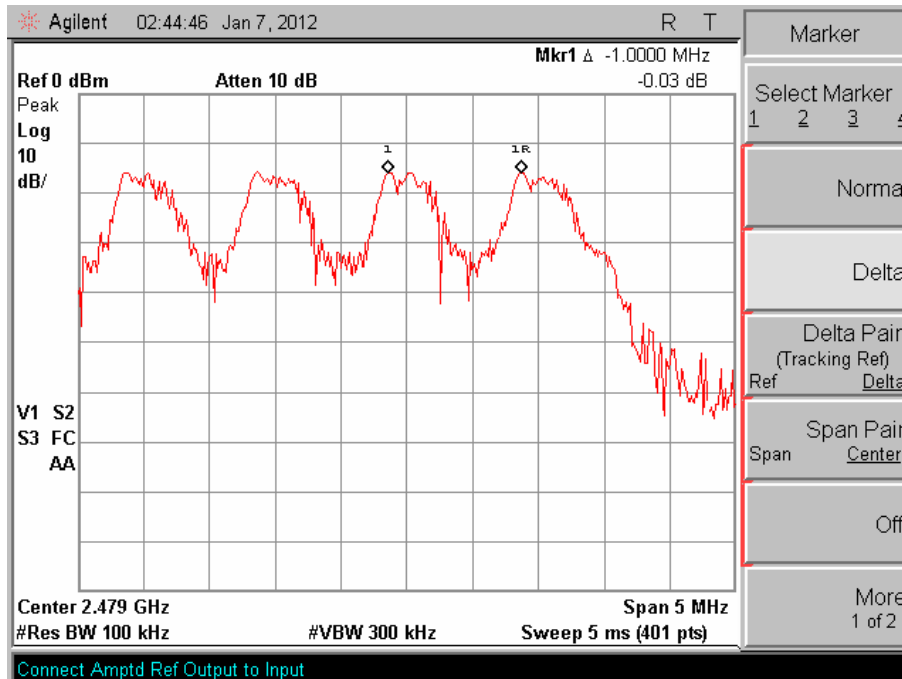


## 4.5 Number of Hopping Frequency

### 4.5.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

### 4.5.2 Block diagram of test setup

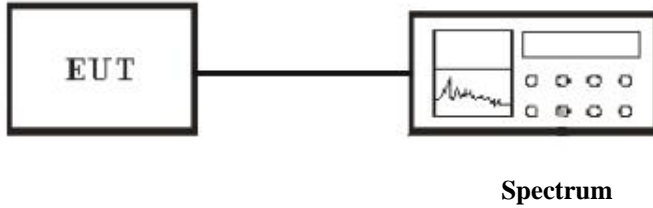

**Connection method:** delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The  $Z_c$  of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

### 4.5.3 Measurement method

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are 20 non-overlapping channels.


### 4.5.4. Result

Temperature ( ) : 22~23	EUT: Wireless Thermometer
Humidity (%RH) : 50~54	M/N: WTM-BT30-I
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode
Test data: Jan 07, 2012	Test engineer: Phenix



Frequency (MHz)	Number of Hopping Channel	Min. Limit (Channels)
2400~2483	79	>15

**Test Plot:**

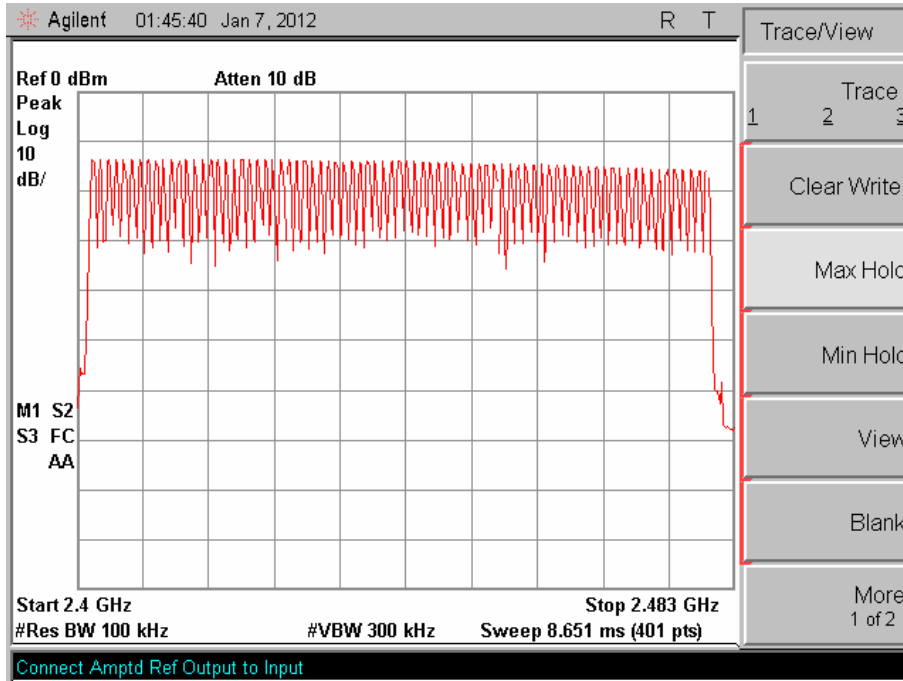


## 4.6 Dwell Time of Each Frequency

### 4.6.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

### 4.6.2 Block diagram of test setup

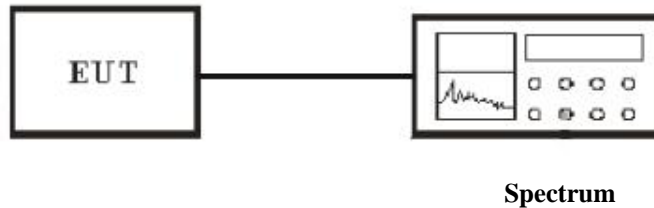

**Connection method:** delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The  $Z_c$  of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

### 4.6.3 Measurement method

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Measure the maximum time duration of one single pulse.

## 4.6.4. Result

Temperature ( ) : 22~23	EUT: Wireless Thermometer
Humidity (%RH) : 50~54	M/N: WTM-BT30-I
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode
Test data: Jan 07, 2012	Test engineer: Phenix



**Calculate:**

**The Dwell Time = (time of Pulse / Pulse Cycle) x 0.4(second) x 79(channels)**



Channel	Time of Pulse (ms)	Pulse Cycle (ms)	Dwell Time (ms)	Limit (ms)	Result
LOW	0.425	35	383	400	Pass
MID	0.4375	35	395	400	Pass
HIG	0.425	37.5	358	400	Pass

The maximum time of occupancy for a particular channel is 395 ms, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.



**Test Plot:**  
**Channel LOW :**

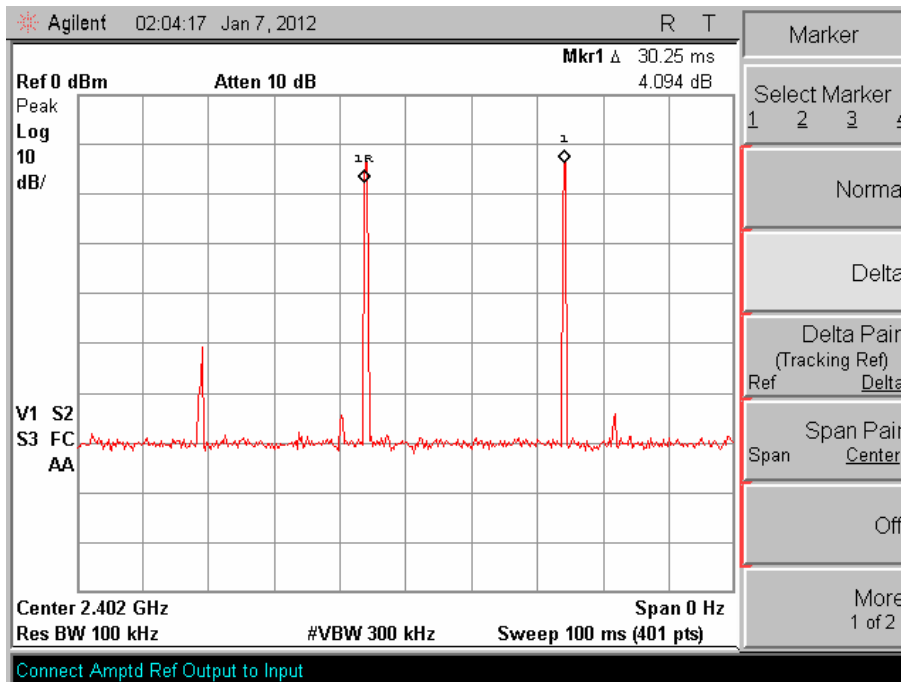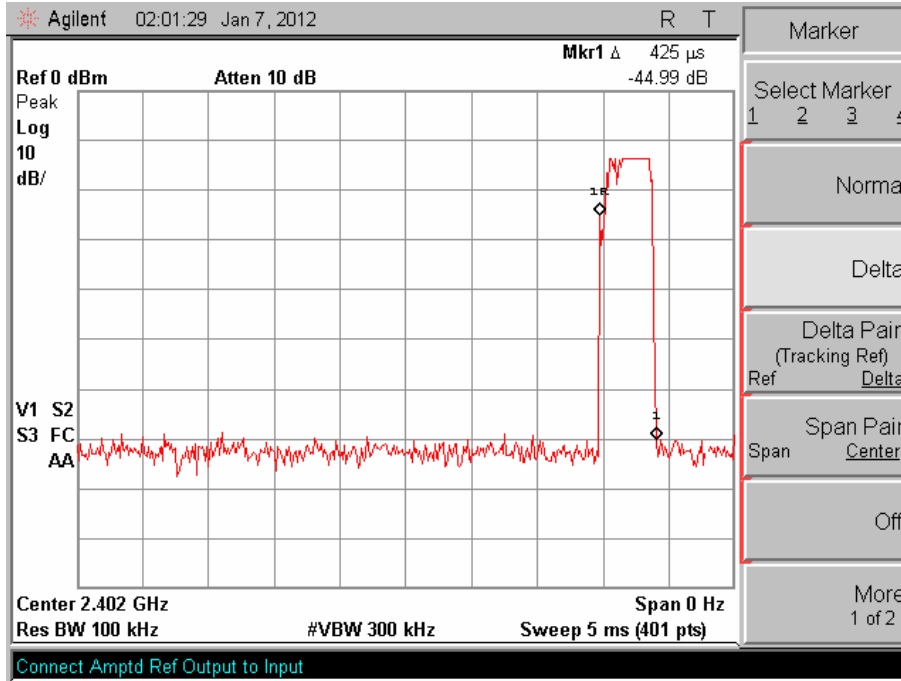

Channel MID :

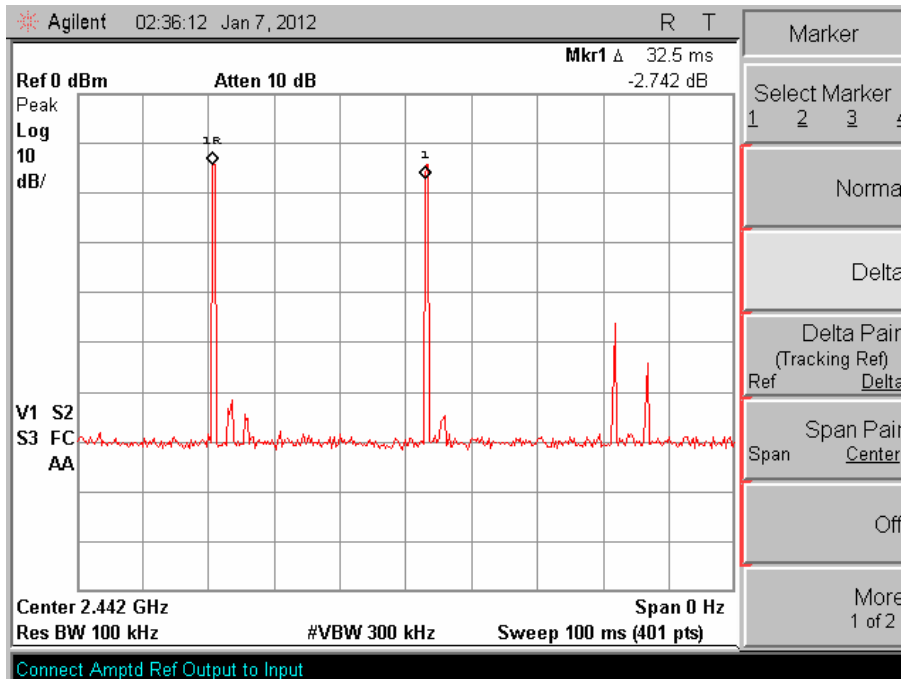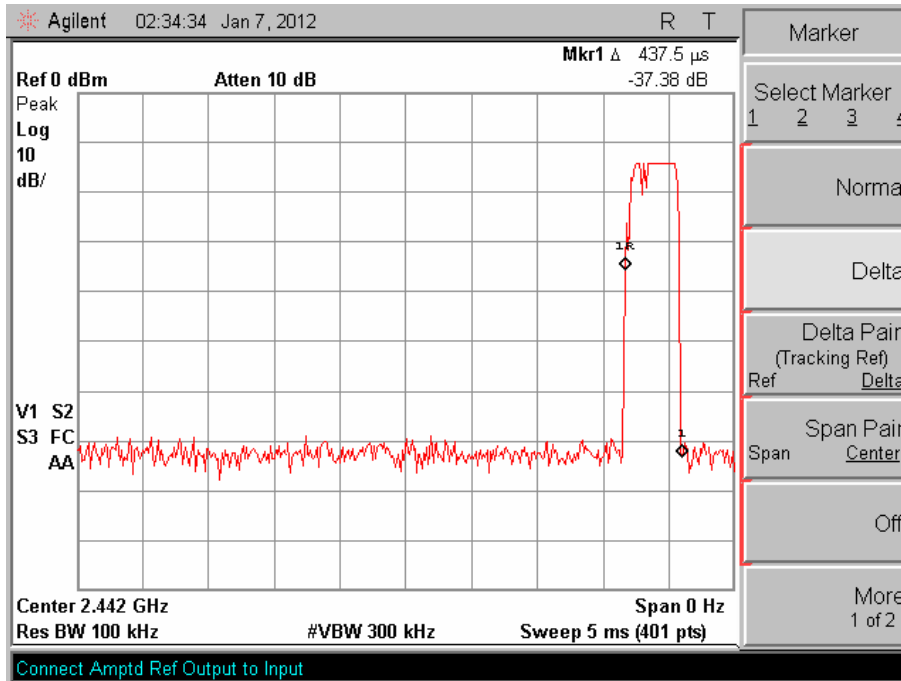

**Channel HIG :**

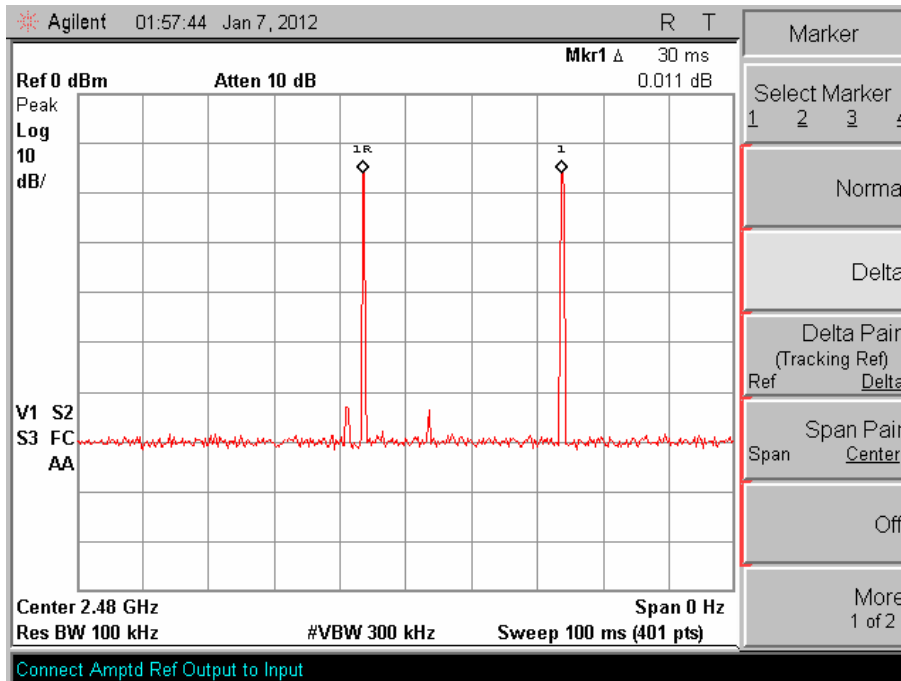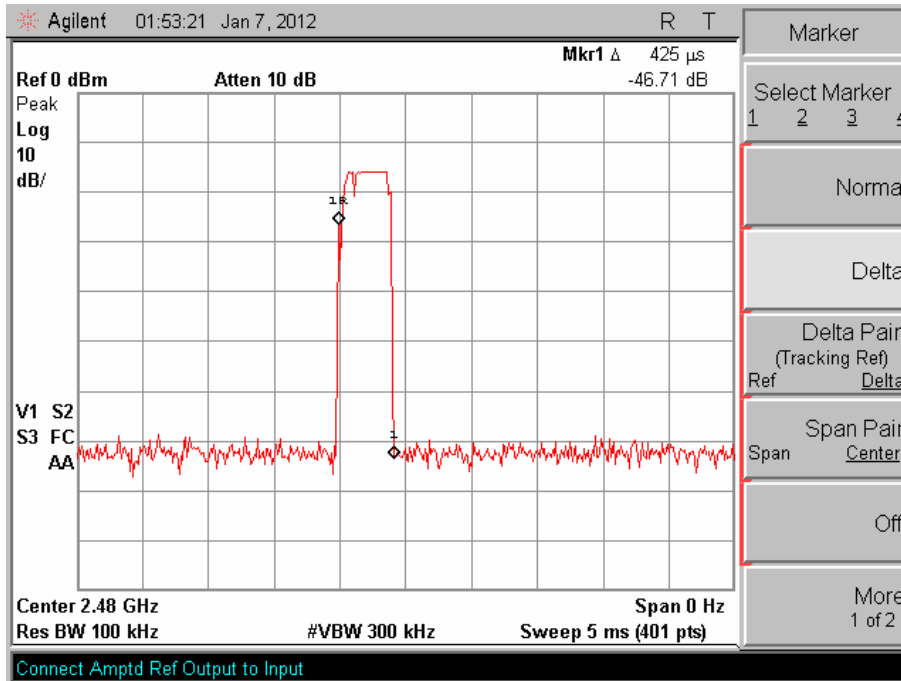


## 4.7 Maximum Peak Output Power

### 4.7.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

### 4.7.2 Block diagram of test setup

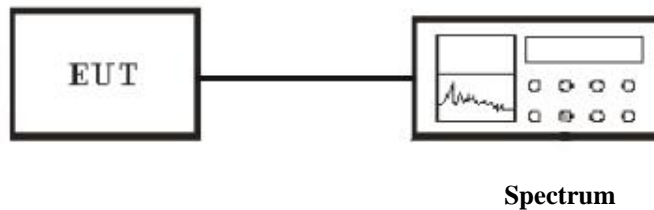

**Connection method:** delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The  $Z_c$  of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

### 4.7.3 Measurement method


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in above figure without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
  - RBW > the 20 dB bandwidth of the emission being measured
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

## 4.7.4. Result



Temperature ( ): 22~23	EUT: Wireless Thermometer
Humidity (%RH): 50~54	M/N: WTM-BT30-I
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode
Test data: Mar 15, 2012	Test engineer: Phenix

Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
LOW	2402	-5.18	30
MID	2442	-5.26	30
HIG	2480	-5.68	30

## Channel LOW :

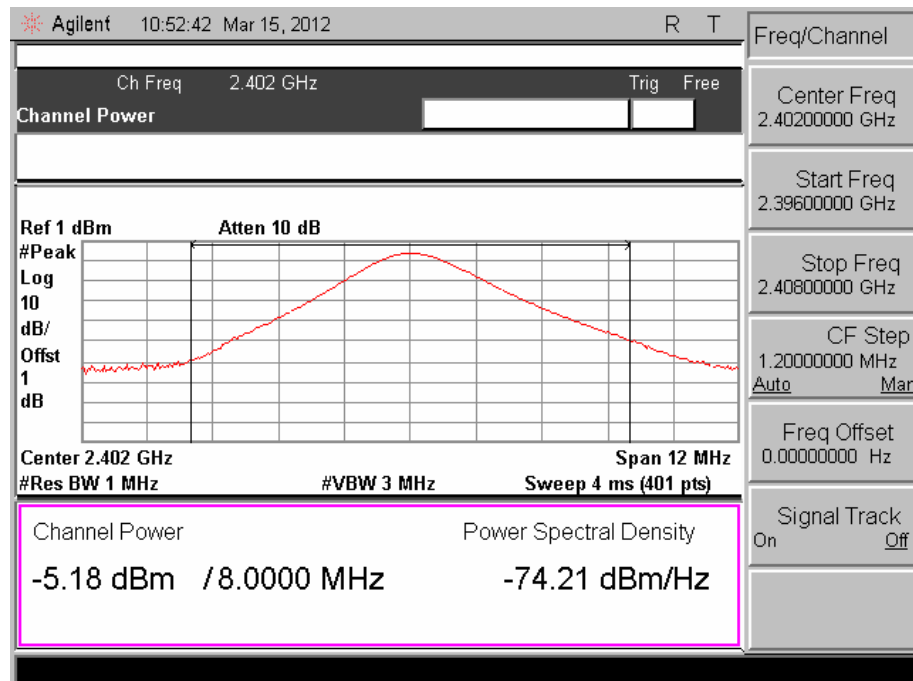

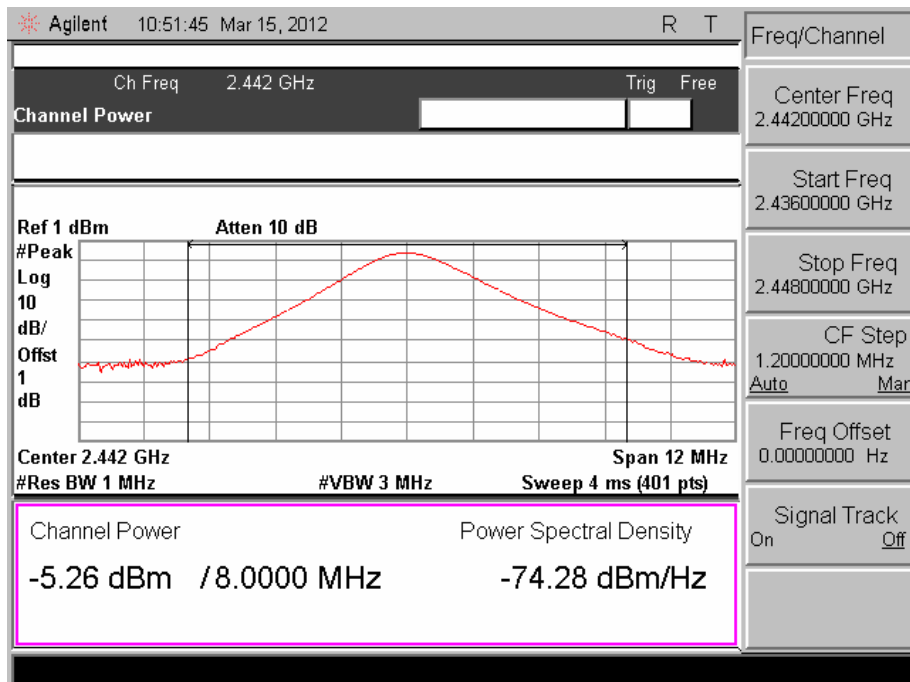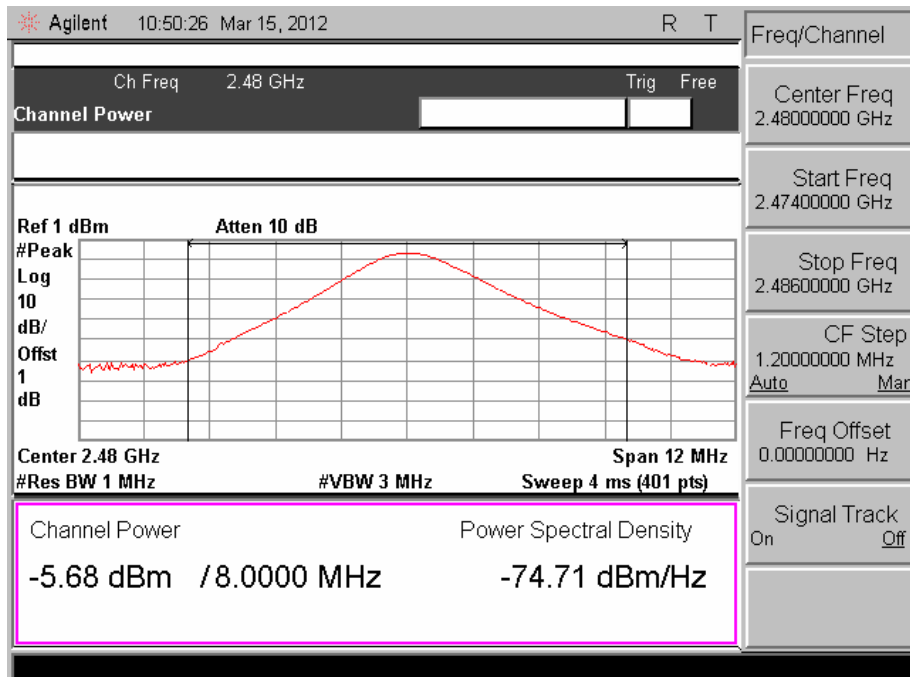


**Channel MID :**

**Channel HIG :**


## 4.8 Band Edges Emission

### 4.8.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 4.8.2 Block diagram of test setup



**Spectrum**

**Connection method:** delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The  $Z_c$  of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

### 4.8.3 Measurement method

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 10MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.


## 4.8.4. Result

Temperature ( ): 22~23	EUT: Wireless Thermometer
Humidity (%RH): 50~54	M/N: WTM-BT30-I
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode
Test data: Jan 07, 2012 and Jan 10,2012	Test engineer: Phenix


**Conducted:**

<b>Frequency (MHz)</b>	<b>Read Delta (dB)</b>	<b>Limits (dB)</b>	<b>Margin (dB)</b>
2400	-51.9	-20	31.9
2483.5	-50.5	-20	30.5

**Channel LOW :**

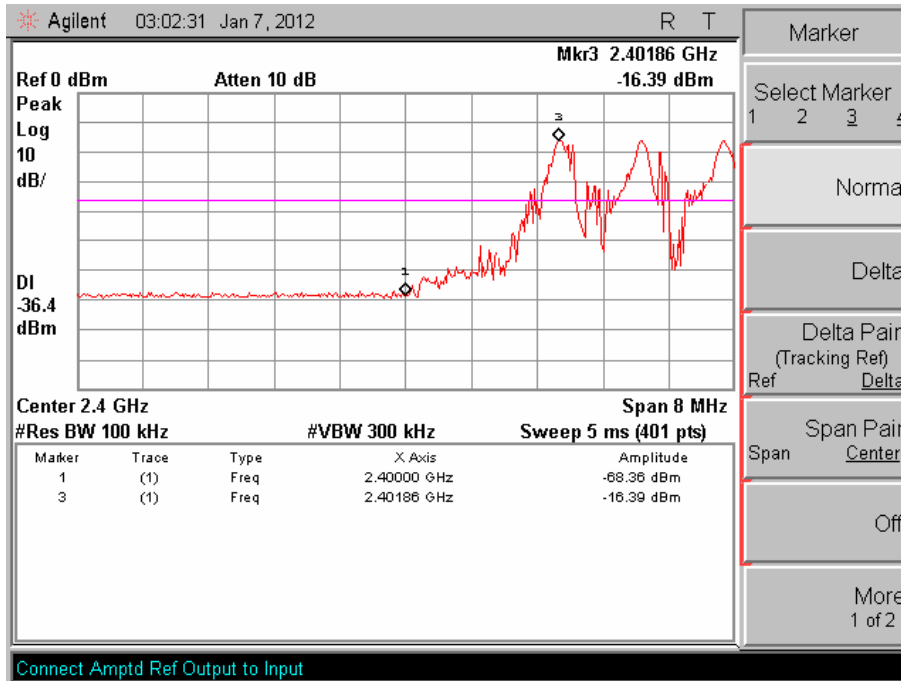

**Channel HIG :**

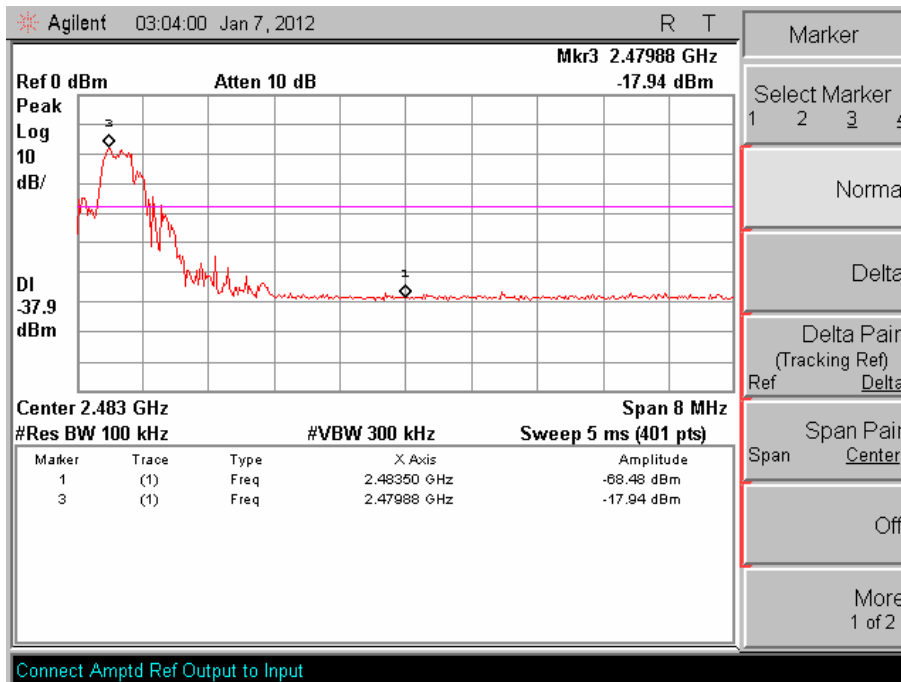

**Radiated:**  
CH LOW:



2012/01/10 14:41:48

### RADIATED EMISSION

Date : 2012/01/10 14:31:46

Trade Name	: Raiing	Document No.	:
Model Name	: WTM-BT30-1	Power Supply	: Internal battery
Product Name	: Wireless Thermometer	Temp/Humi	: 27/55RH%
Test Condition	: 2402MHz	Operator	: pang
Memo	:		

LIMIT : FCC Part15 C transmitter spurious above1G(average)

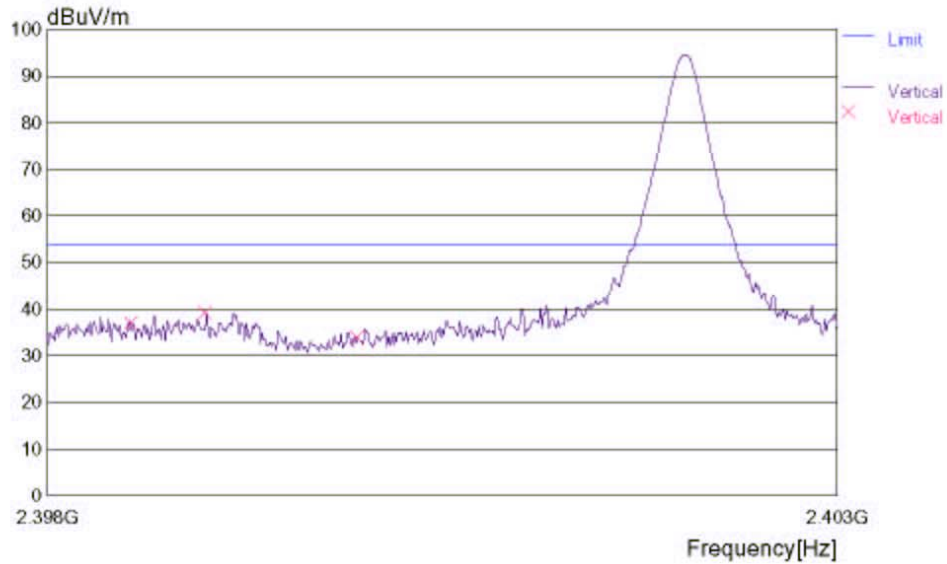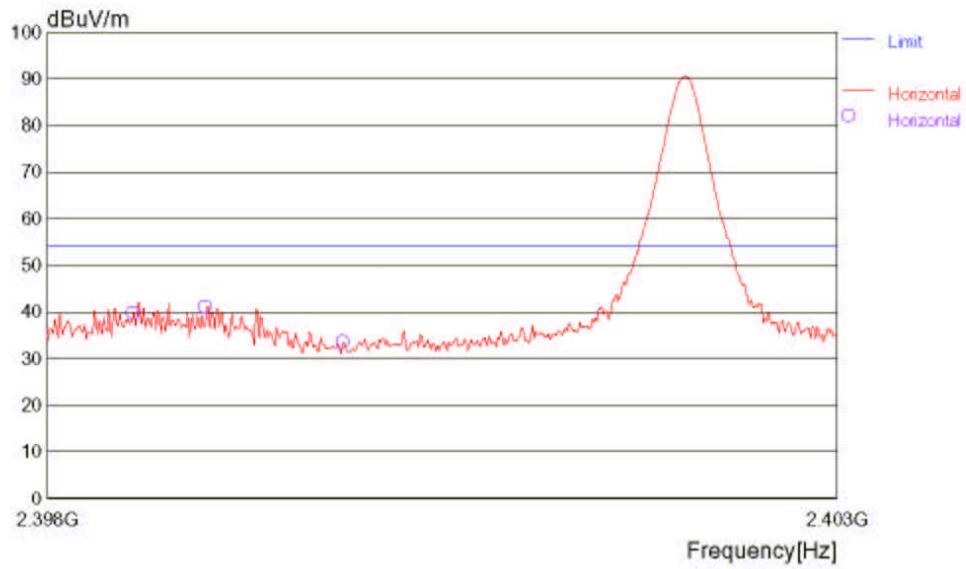

2012/01/10 14:41:48

## RADIATED EMISSION

Date : 2012/01/10 14:31:46

Trade Name	: Raiing	Document No.	:
Model Name	: WTM-BT30-1	Power Supply	: Internal battery
Product Name	: Wireless Thermometer	Temp/Humi	: 27/55RH%
Test Condition	: 2402MHz	Operator	: pang

Memo :

LIMIT : FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
2398.541	39.5	HRN	PK	31.4	-34.0	36.9	55	1.00	Vert.	54.0	17.1
2398.551	42.4	HRN	PK	31.4	-34.0	39.8	75	2.00	Hori.	54.0	14.2
2399.011	43.7	HRN	PK	31.4	-34.0	41.1	71	2.00	Hori.	54.0	12.9
2399.011	41.6	HRN	PK	31.4	-34.0	39.0	59	1.00	Vert.	54.0	15.0
2399.882	36.0	HRN	PK	31.4	-34.0	33.4	265	2.00	Hori.	54.0	20.6
2399.972	36.4	HRN	PK	31.4	-34.0	33.8	315	1.00	Vert.	54.0	20.2

CH HIG:

2012/01/10 14:39:31

### RADIATED EMISSION



Date : 2012/01/10 14:39:13

Trade Name : Raiing  
Model Name : WTM-BT30-1  
Product Name : Wireless Thermometer  
Test Condition : 2480MHz

Document No. :  
Power Supply : Internal battery  
Temp/Humi : 27/55RH%  
Operator : pang

Memo :

LIMIT : FCC Part15 C transmitter spurious above1G(average)

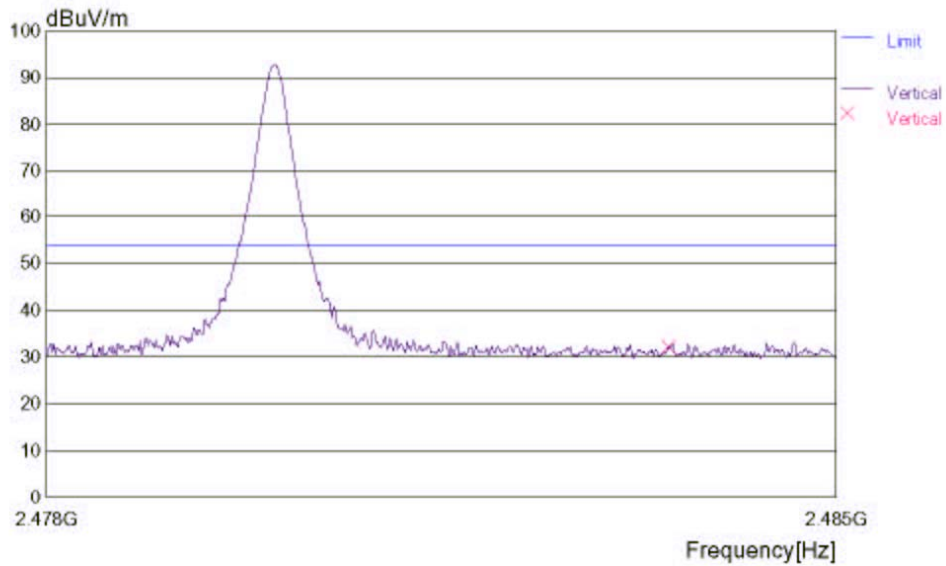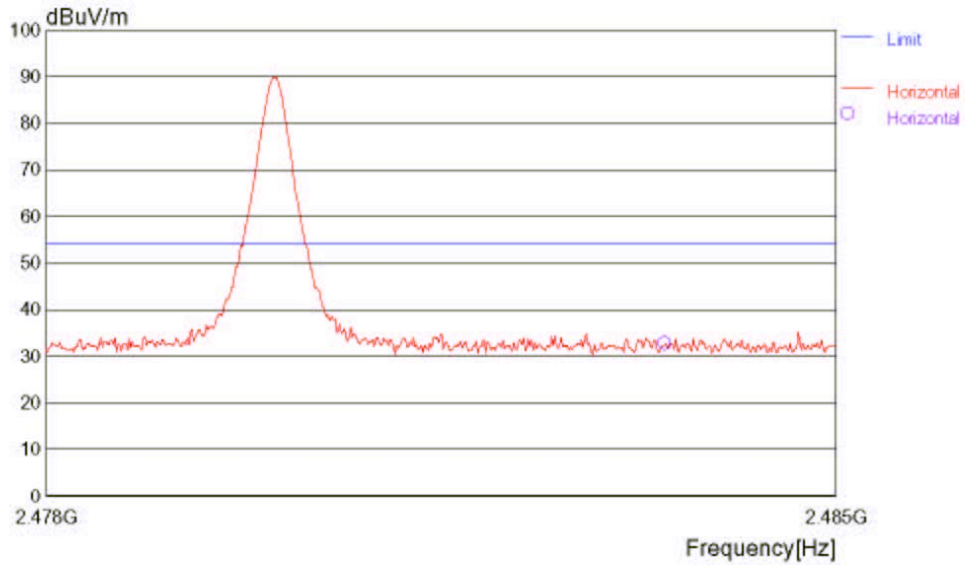

2012/01/10 14:39:31

## RADIATED EMISSION

Date : 2012/01/10 14:39:13

Trade Name : Raiing	Document No. :
Model Name : WTM-BT30-1	Power Supply : Internal battery
Product Name : Wireless Thermometer	Temp/Humi : 27/55RH%
Test Condition : 2480MHz	Operator : pang

Memo :

LIMIT : FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
2483.497	35.3	HRN	PK	31.2	-33.8	32.7	38	3.00	Hori.	54.0	21.3
2483.525	34.7	HRN	PK	31.2	-33.8	32.1	40	1.00	Vert.	54.0	21.9



## 4.9 Spurious Radiated Emission

### 4.9.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 4.9.2 Block diagram of test setup

Radiated Measurement Setup:

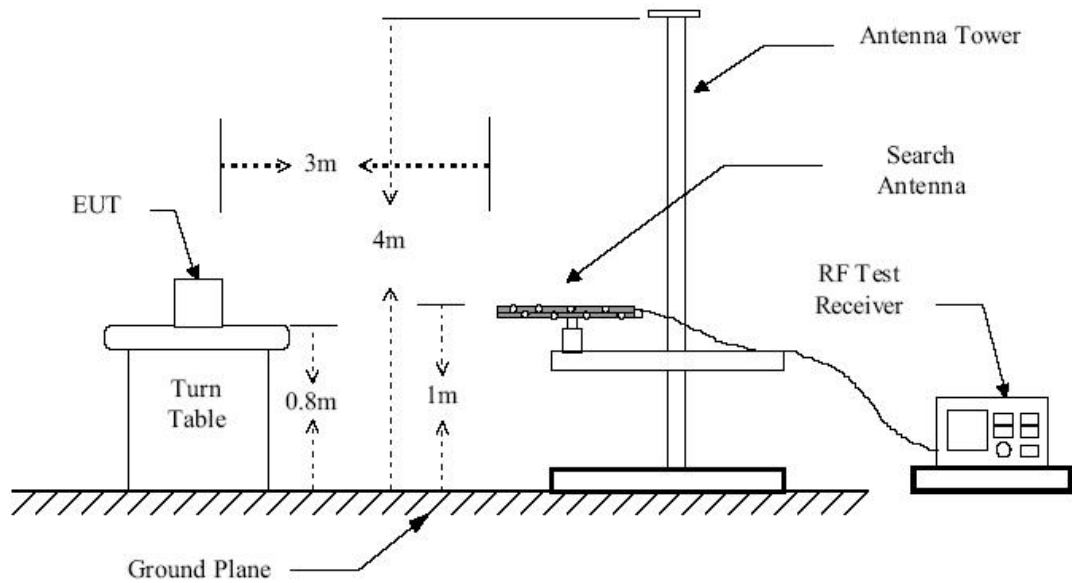


Figure 1 : Frequencies measured below 1 GHz configuration


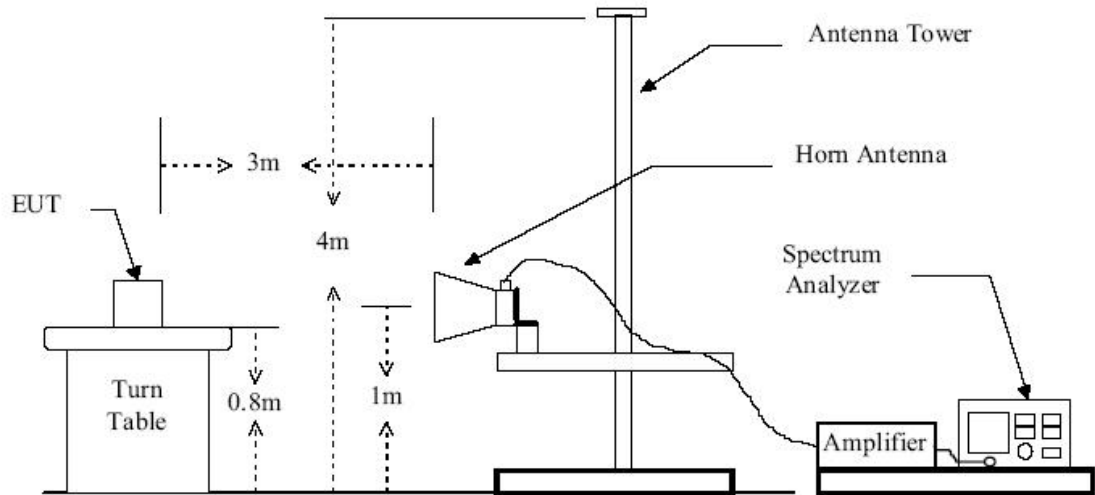


Figure 2 : Frequencies measured above 1 GHz configuration

Conducted Measurement Setup:

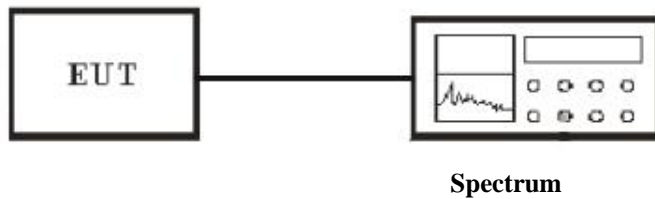

**Connection method:** delete the antenna of EUT and connect receiver with a cable. The connector of cable is N type. The  $Z_c$  of the cable is 50 OHM. The other side of cable solder on the antenna terminal. Because the impedance of antennal terminal is 50 OHM, and the impedance of receiver is also 50 OHM, so this connection is matching.

#### 4.9.3 Measurement method

##### Radiated Measurement

1. Configure the EUT according to ANSI C63.4 (2003).
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.

5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

### **Conducted Measurement**

1. For emission above 1GHz, conducted measurement method is used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 100KHz and VBW to 300 KHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

## 4.9.4. Result

**PASS****Radiated:****Below 30MHz:**

No further spurious emissions found between lowest internal used or generated frequency and 30 MHz.

**30M- 1GHz:**

2012/01/07 09:16:34



**RADIATED EMISSION**

Date : 2012/01/07 09:14:50

Trade Name	: Railing	Document No.	:	
Model Name	: WTM-BT30-1	Power Supply	:	Internal battery
Product Name	: Wireless Thermometer	Temp/Humi	:	25 Deg/55% RH
Test Condition	: Normal	Operator	:	Phenix Zhang

Memo :

LIMIT : FCC Part15 Class B(3m)/USA

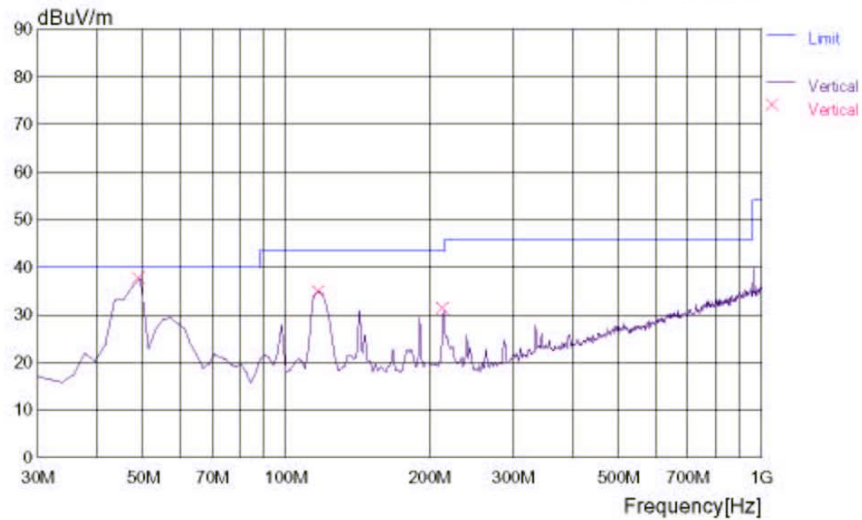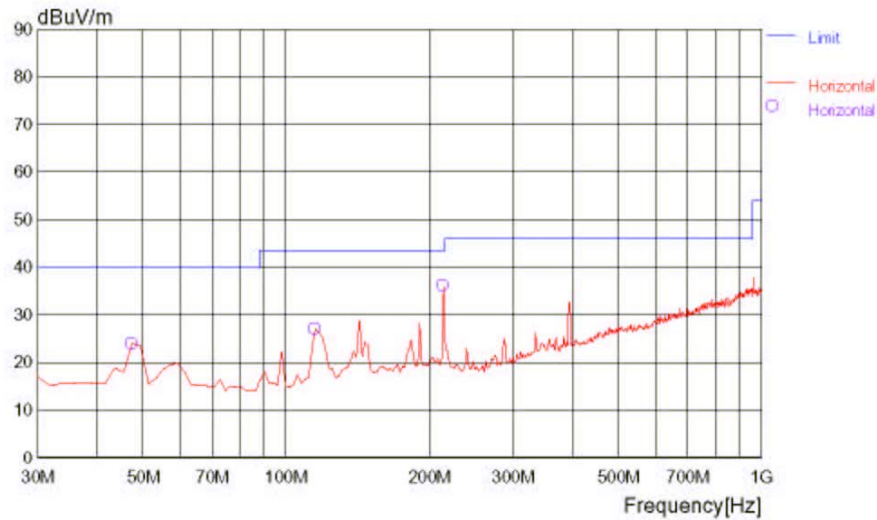

2012/01/07 09:16:34

## RADIATED EMISSION

Date : 2012/01/07 09:14:50

Trade Name : Raiing	Document No. :
Model Name : WTM-BT30-1	Power Supply : Internal battery
Product Name : Wireless Thermometer	Temp/Humi : 25 Deg/55% RH
Test Condition : Normal	Operator : Phenix Zhang

Memo :

LIMIT : FCC Part15 Class B(3m)/USA

Frequency [MHz]	Meter Reading (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
47.495	37.6	BL	PK	11.0	-24.7	23.9	129	4.00	Hori.	40.0	16.1
49.439	51.3	BL	PK	10.9	-24.7	37.5	26	2.99	Vert.	40.0	2.5
115.531	40.7	BL	PK	10.2	-24.0	26.9	79	4.00	Hori.	43.5	16.6
117.475	48.5	BL	PK	10.4	-24.0	34.9	254	1.00	Vert.	43.5	8.6
214.670	46.4	BL	PK	13.0	-23.5	35.9	300	1.00	Hori.	43.5	7.6
214.670	41.6	BL	PK	13.0	-23.5	31.1	250	1.00	Vert.	43.5	12.4

Above 1GHz:

CH LOW:

2011/12/16 11:44:06



### RADIATED EMISSION

Date : 2011/12/16 11:43:17

Trade Name	: Raing	Document No.	:
Model Name	: WTM-BT30-1	Power Supply	: Internal battery
Product Name	: Wireless Thermometer	Temp/Humi	: 27/55RH%
Test Condition	: 2402MHz	Operator	: Eliy zhang

Memo :

LIMIT : FCC Part15 C transmitter spurious above1G(peak)  
 FCC Part15 C transmitter spurious above1G(average)

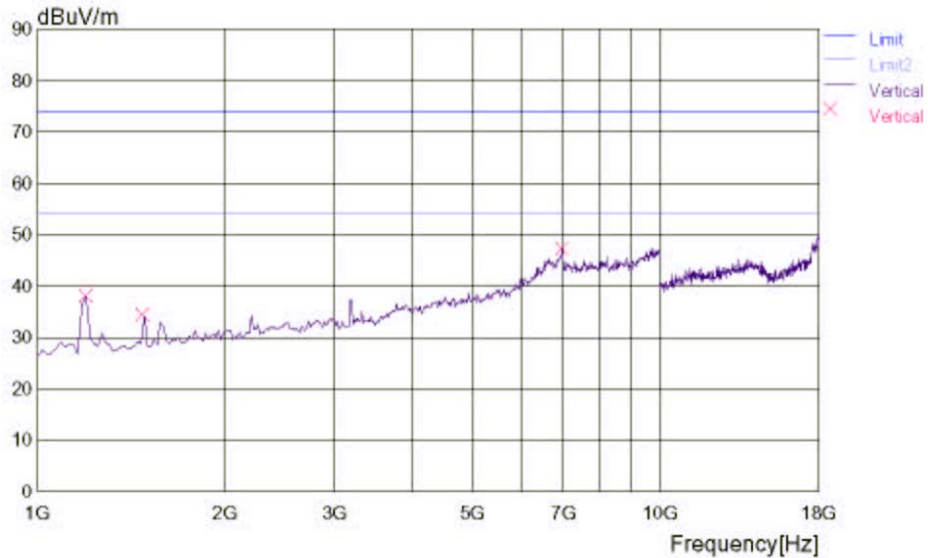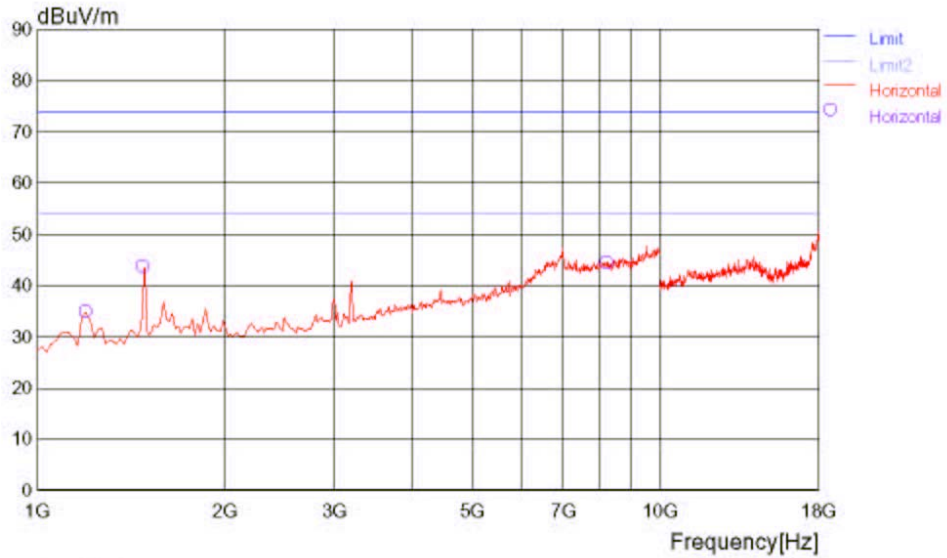

No further spurious emissions found between highest frequency in the table and 25GHz.

2011/12/16 11:44:06

## RADIATED EMISSION

Date : 2011/12/16 11:43:17

Trade Name	: Raiing	Document No.	:
Model Name	: WTM-BT30-1	Power Supply	: Internal battery
Product Name	: Wireless Thermometer	Temp/Humi	: 27/55RH%
Test Condition	: 2402MHz	Operator	: Ely zhang

Memo :

 LIMIT : FCC Part15 C transmitter spurious above1G(peak)  
 FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
1198.397	43.1	HRN	PK	28.3	-36.7	34.7	357	2.00	Hori.	74.0	39.3
1198.397	46.4	HRN	PK	28.3	-36.7	38.0	126	1.00	Vert.	74.0	36.0
1486.975	50.6	HRN	PK	28.9	-35.9	43.6	14	3.00	Hori.	74.0	30.4
1486.975	41.2	HRN	PK	28.9	-35.9	34.2	28	1.00	Vert.	74.0	39.8
6969.959	35.8	HRN	PK	40.9	-29.7	47.0	358	1.00	Vert.	74.0	27.0
8232.488	32.0	HRN	PK	40.9	-28.5	44.4	263	4.00	Hori.	74.0	29.6



CH MID:

2011/12/16 14:28:47

### RADIATED EMISSION

Date : 2011/12/16 14:27:16

Trade Name : Raiing	Document No. :
Model Name : WTM-BT30-1	Power Supply : Internal battery
Product Name : Wireless Thermometer	Temp/Humi : 27/55RH%
Test Condition : 2442MHz	Operator : Eliy zhang
Memo :	
LIMIT : FCC Part15 C transmitter spurious above1G(peak)	
FCC Part15 C transmitter spurious above1G(average)	

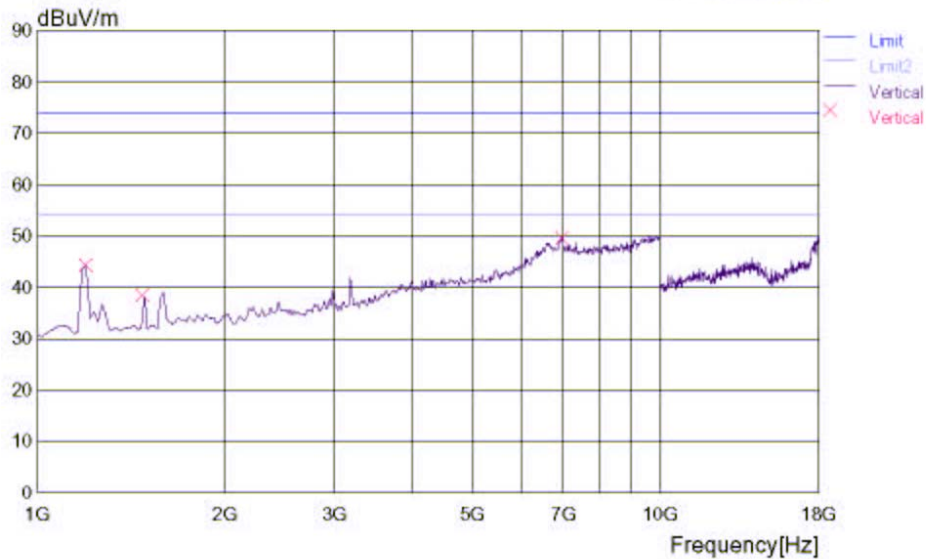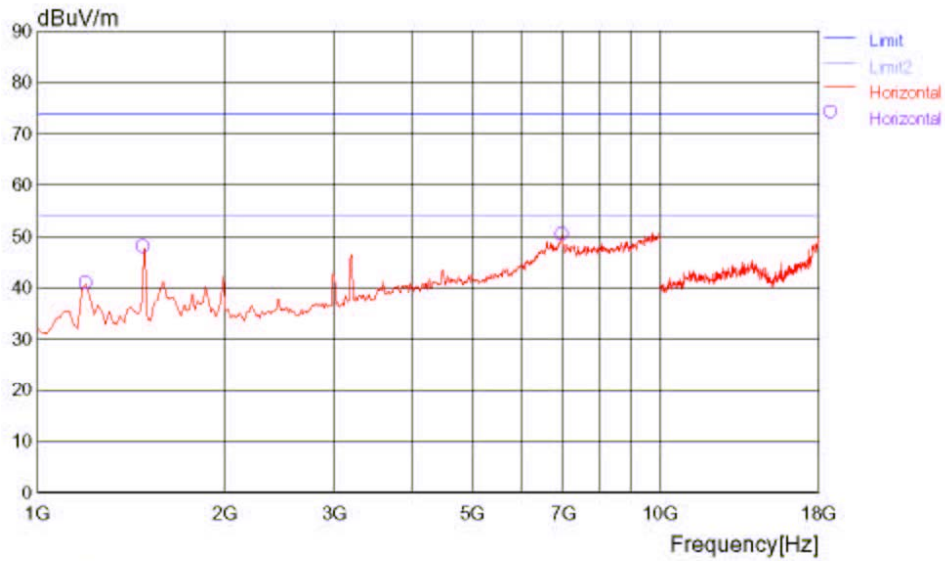

No further spurious emissions found between highest frequency in the table and 25GHz.



2011/12/16 14:28:48

## RADIATED EMISSION

Date : 2011/12/16 14:27:16

Trade Name	: Raiing	Document No.	:
Model Name	: WTM-BT30-1	Power Supply	: Internal battery
Product Name	: Wireless Thermometer	Temp/Humi	: 27/55RH%
Test Condition	: 2442MHz	Operator	: Ely zhang

Memo :

 LIMIT : FCC Part15 C transmitter spurious above1G(peak)  
 FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
1198.397	49.1	HRN	PK	28.3	-36.7	40.7	329	2.00	Hori.	74.0	33.3
1198.397	52.6	HRN	PK	28.3	-36.7	44.2	130	1.00	Vert.	74.0	29.8
1486.975	51.8	HRN	PK	28.9	-35.9	47.8	14	2.00	Hori.	74.0	26.2
1486.975	45.1	HRN	PK	28.9	-35.9	38.1	117	2.00	Vert.	74.0	35.9
6969.959	39.0	HRN	PK	40.9	-29.7	50.2	218	2.00	Hori.	74.0	23.8
6987.996	38.1	HRN	PK	41.0	-29.6	49.5	1	2.00	Vert.	74.0	24.5

CH HIG:

2011/12/16 14:39:06



### RADIATED EMISSION

Date : 2011/12/16 14:38:36

Trade Name	: Raing	Document No.	: :
Model Name	: WTM-BT30-1	Power Supply	: Internal battery
Product Name	: Wireless Thermometer	Temp/Humi	: 27/55RH%
Test Condition	: 2480MHz	Operator	: Eliy zhang

Memo : :

LIMIT : FCC Part15 C transmitter spurious above1G(peak)  
 FCC Part15 C transmitter spurious above1G(average)

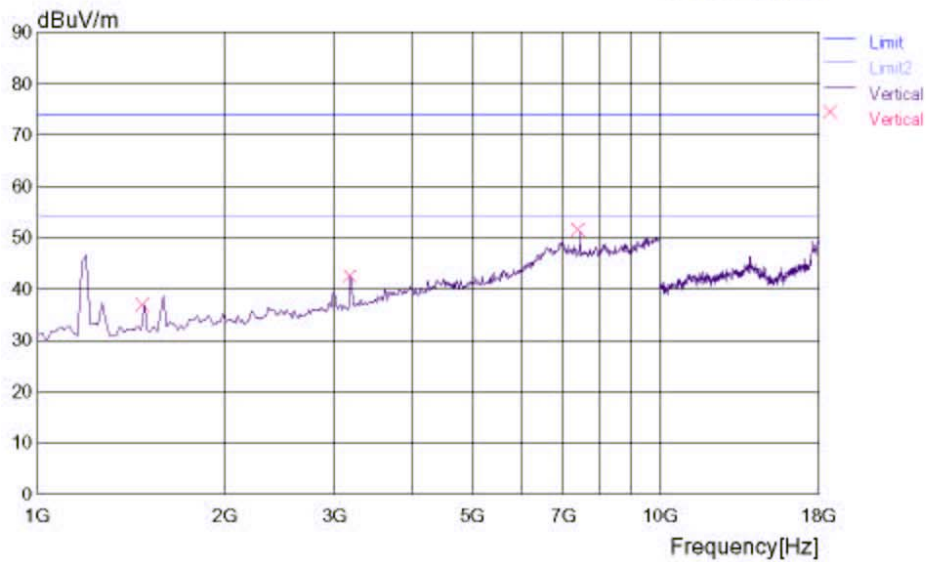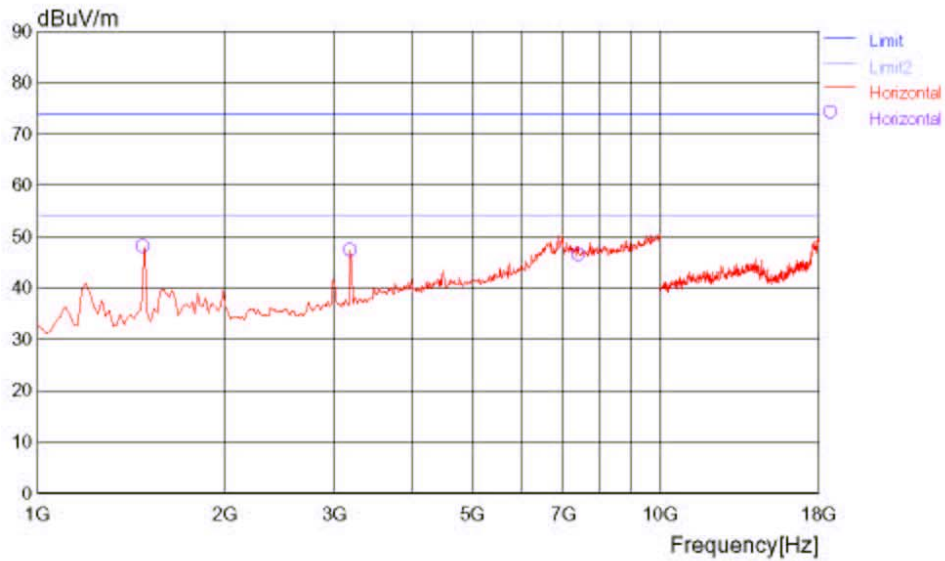

No further spurious emissions found between highest frequency in the table and 25GHz.

2011/12/16 14:39:06

## RADIATED EMISSION

Date : 2011/12/16 14:38:36



Trade Name	: Raiing	Document No.	:
Model Name	: WTM-BT30-1	Power Supply	: Internal battery
Product Name	: Wireless Thermometer	Temp/Humi	: 27/55RH%
Test Condition	: 2480MHz	Operator	: Ely zhang

Memo :



 LIMIT : FCC Part15 C transmitter spurious above1G(peak)  
 FCC Part15 C transmitter spurious above1G(average)

Frequency [MHz]	Meter (PK) [dBuV]	Ant. Type	Detector	Antenna Factor [dB/m]	Total Loss [dB]	Level (PK) [dBuV/m]	Angle [degree]	Height [m]	Pola.	Limit [dBuV/m]	Margin [dB]
1486.975	54.9	HRN	PK	28.9	-35.9	47.9	18	2.00	Hori.	74.0	26.1
1486.975	43.8	HRN	PK	28.9	-35.9	36.8	304	3.00	Vert.	74.0	37.2
3182.372	46.9	HRN	PK	33.2	-32.8	47.3	333	2.00	Hori.	74.0	26.7
3182.372	42.0	HRN	PK	33.2	-32.8	42.4	357	1.00	Vert.	74.0	31.6
7420.863	34.7	HRN	PK	40.8	-29.2	46.3	168	2.00	Hori.	74.0	27.7
7438.899	39.7	HRN	PK	40.8	-29.2	51.3	84	2.00	Vert.	74.0	22.7



**Conducted:  
Channel LOW :**

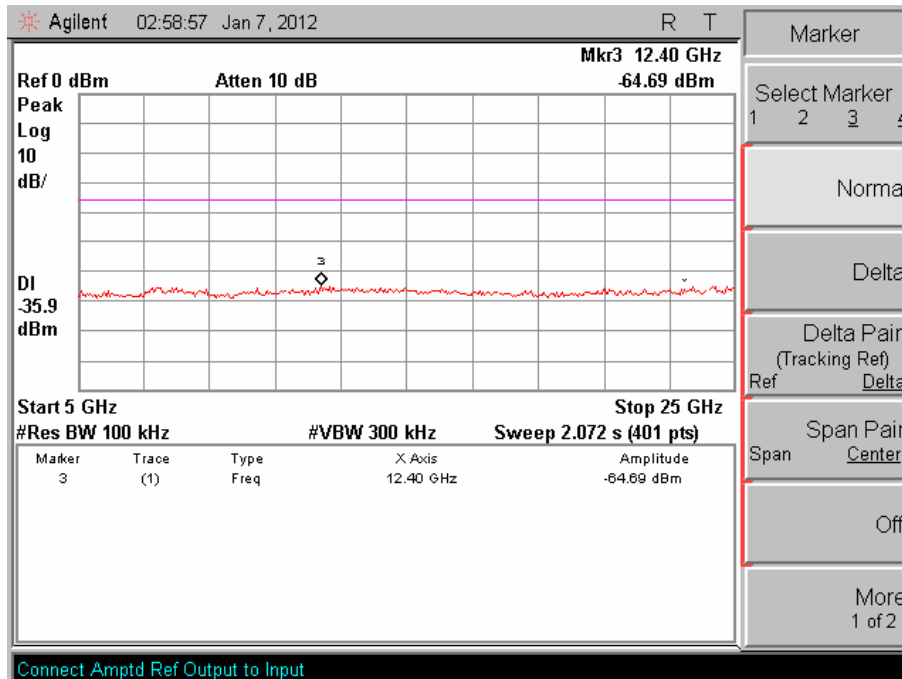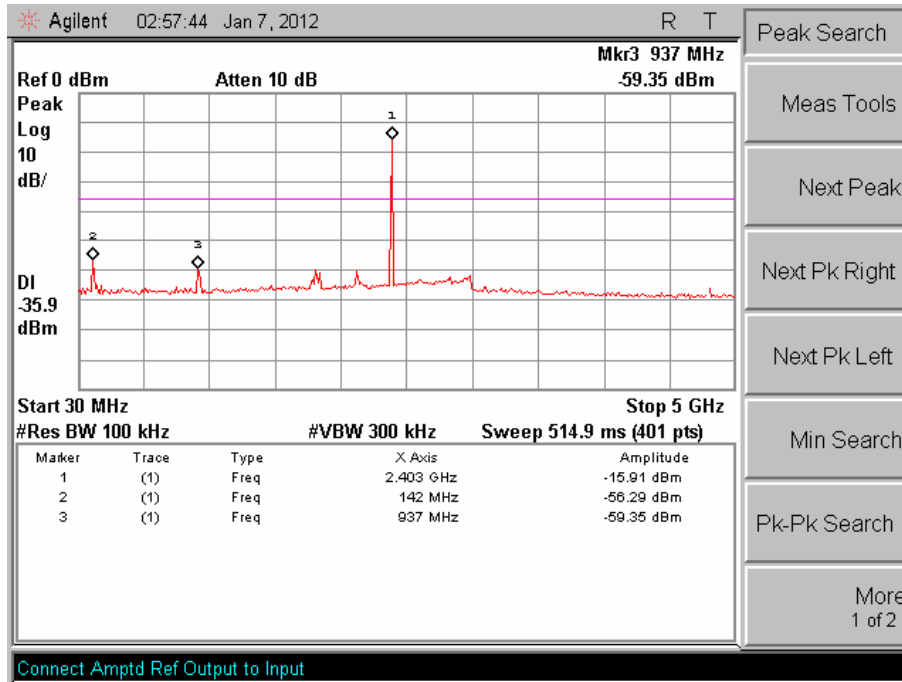

**Channel MID :**

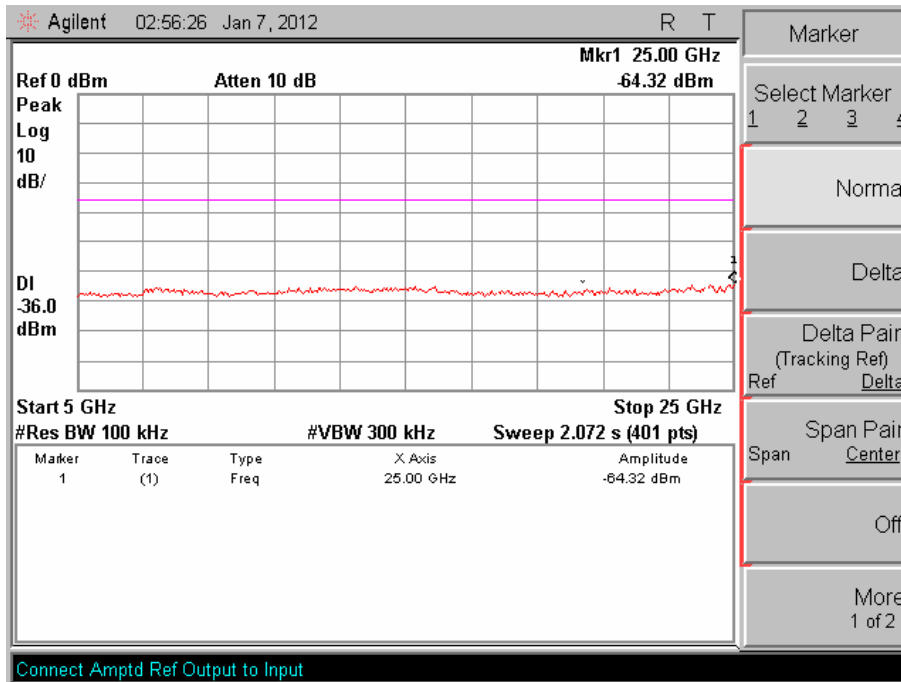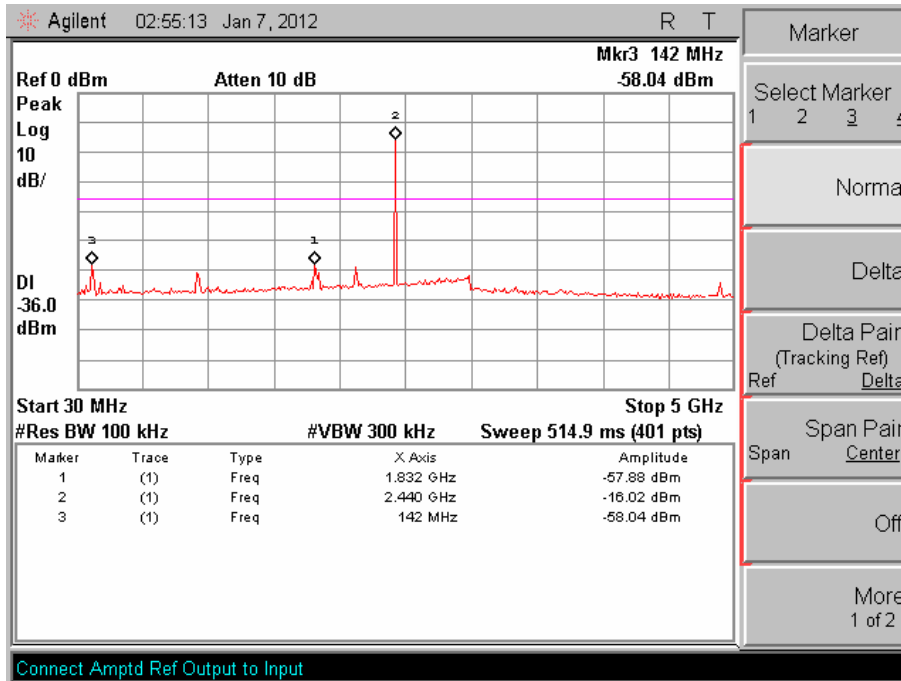


**Channel HIG :**

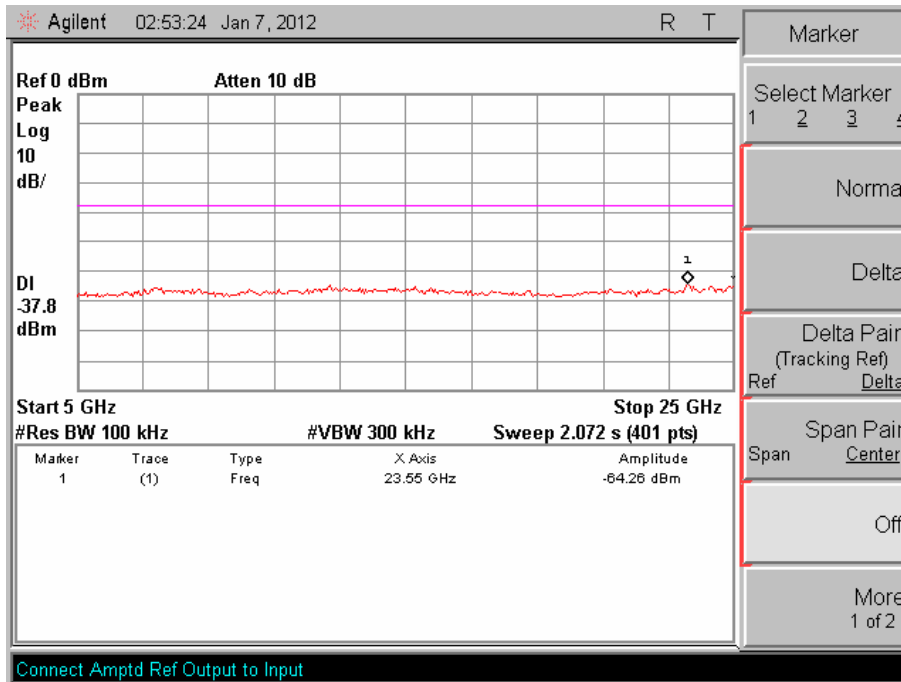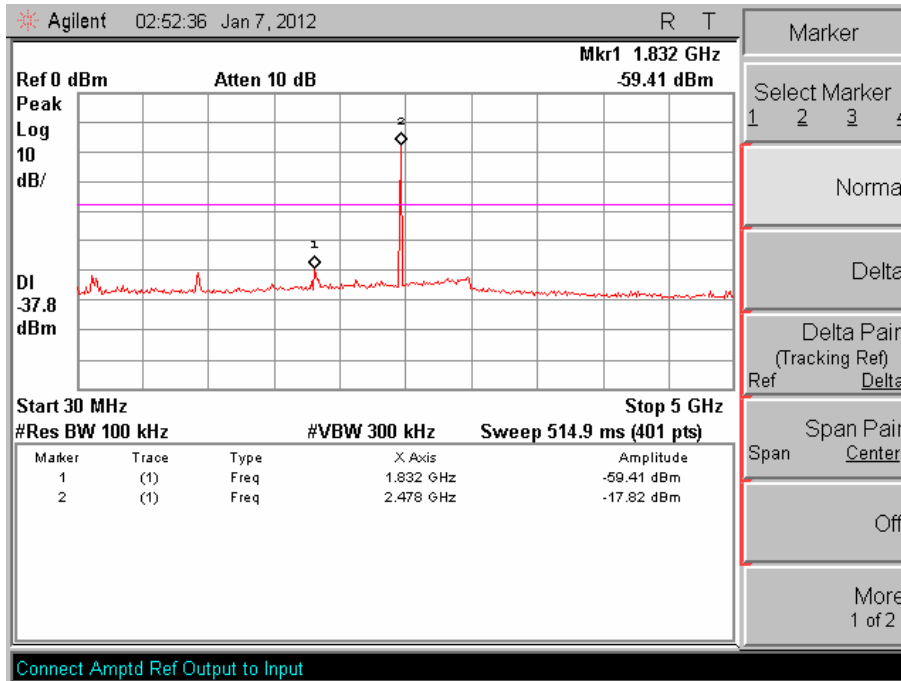

## 5. FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### Mark Location:

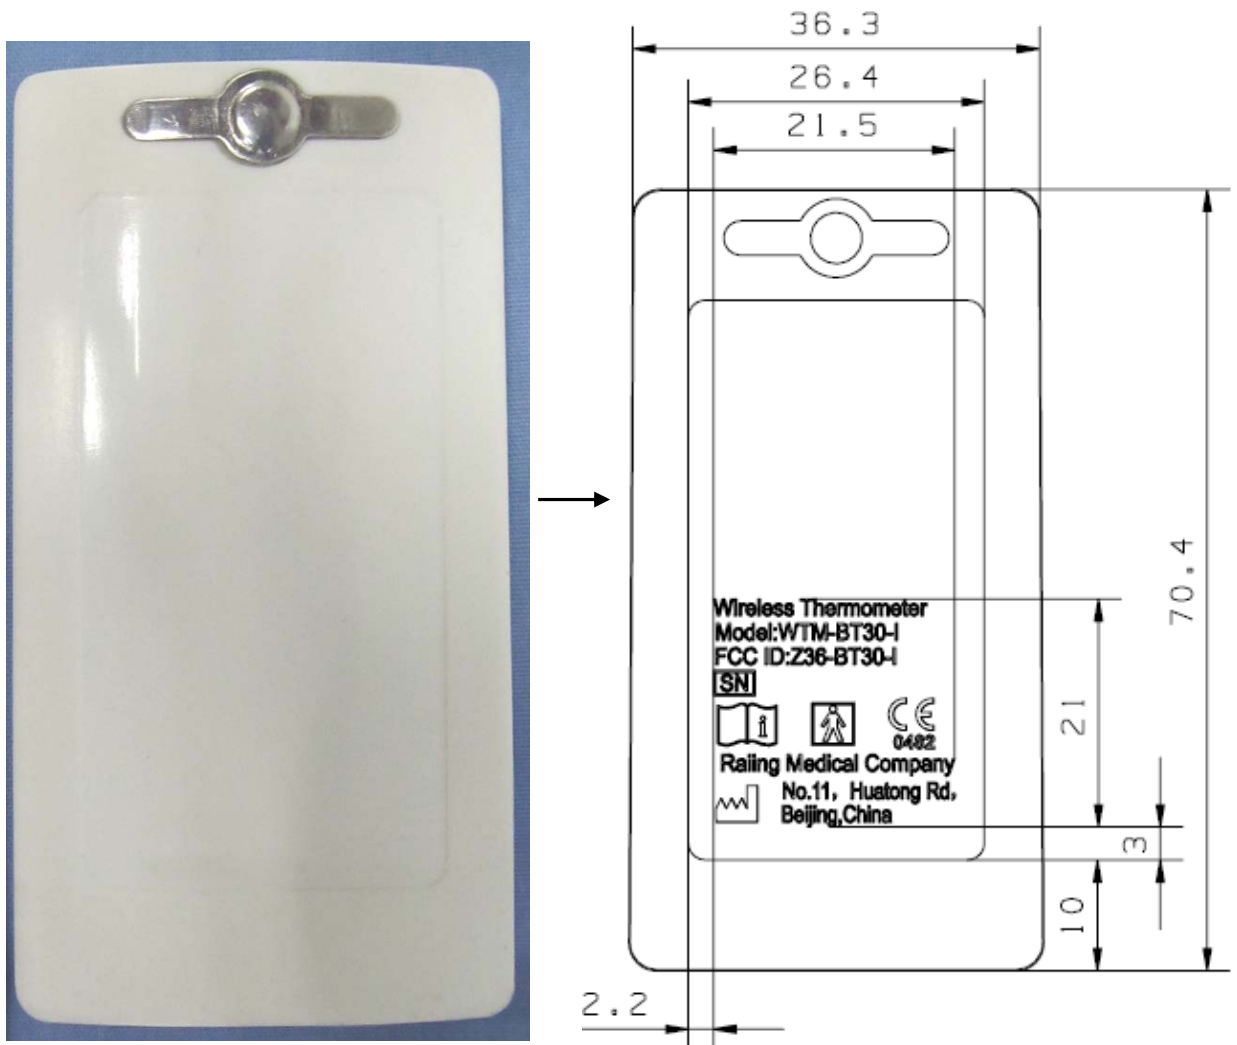

## 5. Test Setup

### 5.1 Ancillary and Accessory Equipment Used


No.	Description	Specification	Quantity
1.	PC	DELL, M/N:540, S/N: 124XK2X	1
2.	Monitor	SHARP, M/N: LCD-19A35-BK, S/N: 806915210	1
3.	Keyboard	DELL, M/N:L100, S/N: CN0RH6566589006860007J	1
4.	Mouse	HP, M/N:M-SBF96	1




## 5.2 Photographs of the Test Configuration

### 5.2.1 Radiated emission

Below 1GHz:

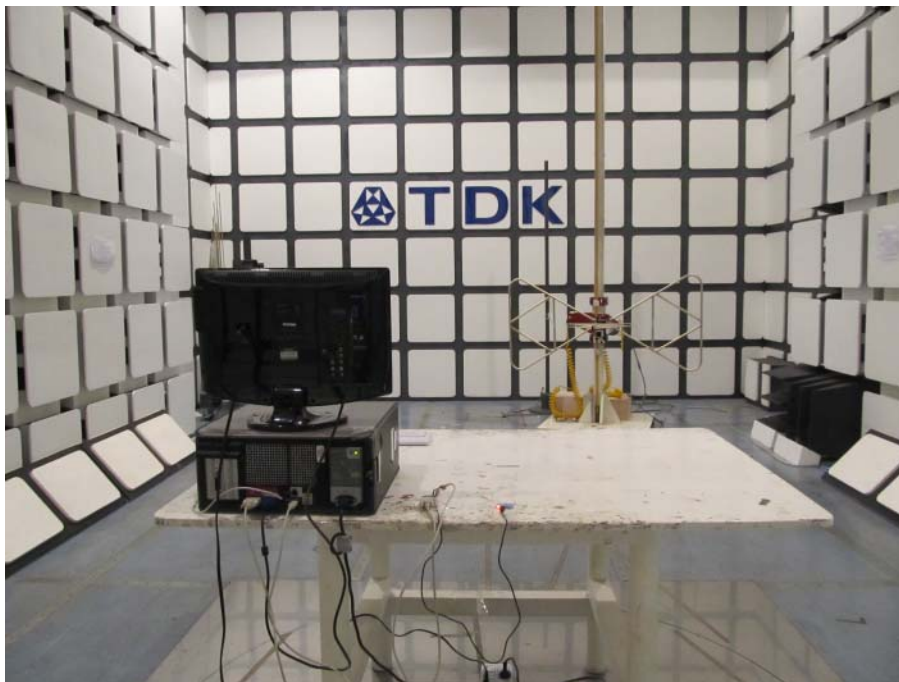


Above 1GHz:

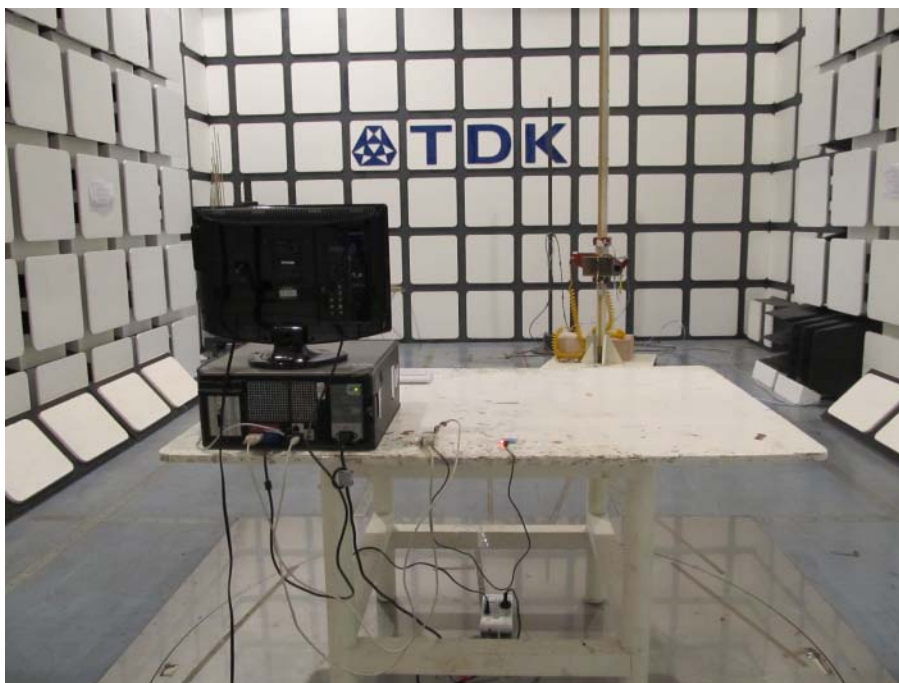

### 5.3 Photographs of the EUT




Enclosure of EUT

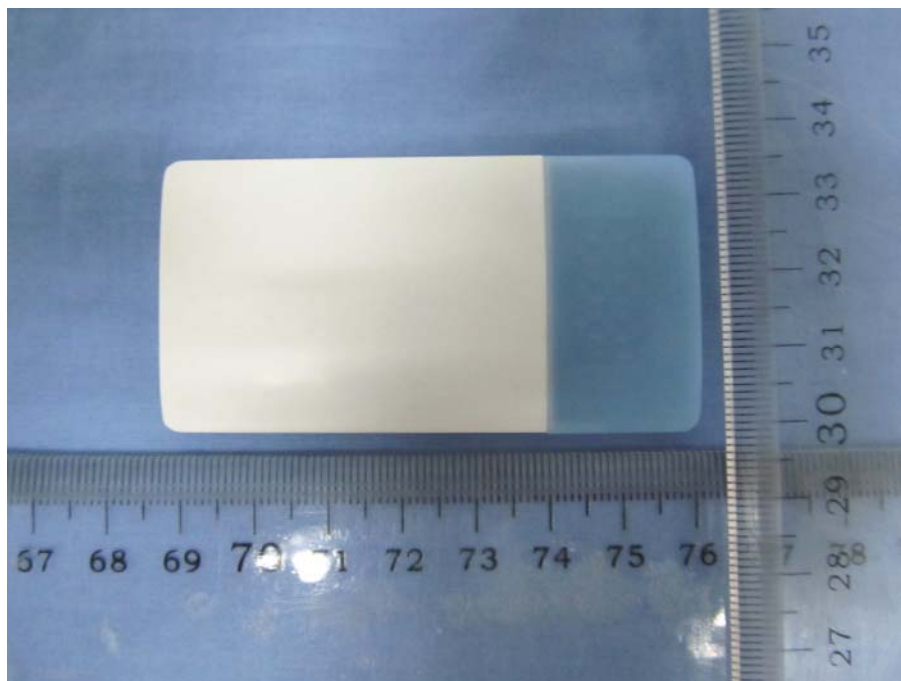


Enclosure of EUT



Connector of EUT

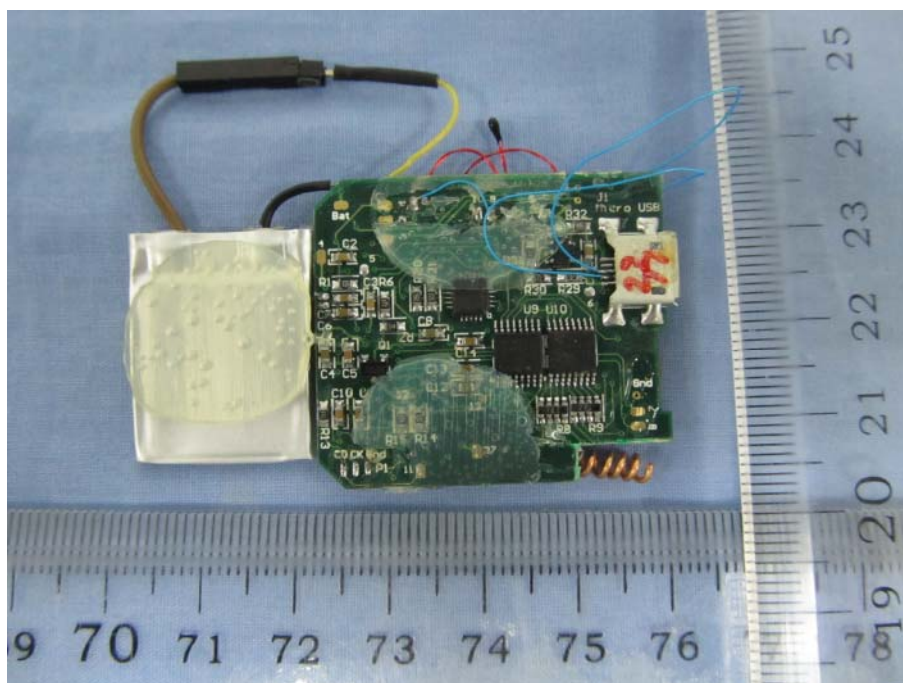

PCB of EUT

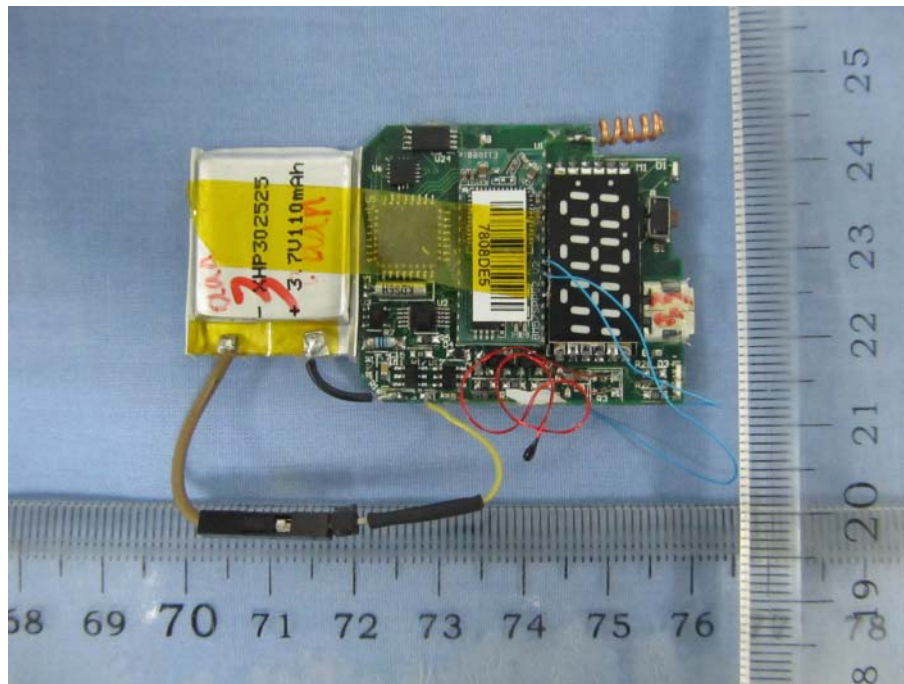

PCB of EUT

## 6. Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Calibration Date
1	Precision Biconical Antenna	TDK Co.	PBA-2030	090500	2011-09-18
2	Precision Log Periodic Antenna	TDK Co.	PLP-3003	061001	2011-09-18
3	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130174	2011-09-18
4	Horn antenna	TDK	HRN-0118	130186	2011-04-07
5	Attenuator 6 dB	Agilent	8491B	MY39260147	2011-09-18
6	Preamplifier	TDK Sonoma	310	242803	2011-04-07
7	Preamplifier	ELENA	EAU-3718 GXA	A070701	2011-04-07
8	EMI Receiver	Rohde & Schwarz	ESIB26	100234	2011-04-07
9	EMI Receiver	Rohde & Schwarz	ESCS30	100350	2011-04-07
10	Spectrum Analyzer	Agilent	E4403B	MY44210199	2011-04-07
11	Art. Mains Network	EMCO	3816/2	00044921	2011-04-07
12	Transient Limiter(10 dB)	Agilent	11947A	3107A03736	2011-04-07
13	Personal Computer	HP	DX2000MT	MXD4250FZM	N/A
14	Personal Computer	HP	DX2000MT	MXD4130B2N	N/A
15	Semi-Anechoic Chamber	TDK Co.	N/A	N/A	2011-04-07
16	Shielded Room	TDK Co.	N/A	N/A	N/A
17	Loop Antenna	EMCO	6502	9107-2440	2011-04-07

## 7. Test Uncertainty

Test	Range	Confidence Level	Calculated Uncertainty
Radiated emission(3m)	30-1000MHz	95%	4.3dB
Radiated emission(3m)	1-18GHz	95%	5.2dB
Conducted emission	0.15-30MHz	95%	3.3dB

## 8. Appendix

### 8.1 Confirmation of Compliance within the Limits

#### 8.1.1 Method of calculating measurement result

##### Radiated Emission

For example the point of 49.439MHz, vertical, Page 37.

$$\text{Reading} + \text{Antenna factor} + \text{Cable loss} - \text{Gain} = \text{Result}$$

$$\text{Example } 51.3 + 10.9 + 6.8 - 31.5 = 37.5$$

##### Conducted Emission

For example the point of 0.161MHz, L1, Page 9.

$$\text{Reading} + \text{C. FACTOR} = \text{Result}$$

$$\text{Example } 41.5 + 10.0 = 51.5$$

## 8.2 Compliance Statements

### **Subclause 15.247 (a) – Equal Hopping Frequency Use**

Requirement: Each of the transmitter's hopping channels is used equally on average.

The Transmitter operates by selecting a palette (or group) of random channels out of the total 20. Any channels with poor transmission rates are replaced with better channels from the remaining unused channels. The switching pattern from channel to channel is a random pattern.

### **Subclause 15.247 (a) – Receiver Input Bandwidth**

Requirement: The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.

The hopping frequency range is 78.057MHz and channel bandwidth is <2MHz for both transmitter and receiver.

When the receiver receives a good data packet from a transmitter, the receiver sends an acknowledgment back to the transmitter. Once the receiver has responded to the transmitter, then both the transmitter and receiver units each hop to the next frequency channel and the process is repeated

### **Subclause 15.247 (a) – Receiver Hopping Capability**

Requirement: The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.

The RF section uses a complete integrated circuit as the RF transceiver. The receiver is a dual conversion heterodyne, with a low IF frequency. All IF and base band filters are contained within the integrated circuit. The 3dB IF filter BW is 1.405MHz. This matches the transmission BW and provides a functional radio.

The receiver is a dual conversion heterodyne receiver. Changing the receiver channel is achieved by changing the frequency of the PLL controlled local oscillator. The signal from the local oscillator is fed to two mixers which convert the received signal to the IF frequency. The incoming signal is then filtered and demodulated.

Upon startup the receiver searches for a transmitter on all 20 channels. When the receiver captures a packet sent by the transmitter, it extracts the current hopping channels and matches the hopping sequence. At this point the transmitter and receiver have a connection and are now synchronized to the hopping time. Before the hopping sequence adapts, the change request is sent by the transmitter to the receiver on several channels. The hop set change does not occur until the receiver has acknowledged the change. This way the transceivers within the system maintain synchronization.

#### **Subclause 15.247 (a) – Hopping Sequence**

**Requirement:** The hopping sequence is generated and provided with an example.

This product firmware operates by selecting a palette (or group) of random channels out of the total 20. Upon startup, a pre-defined sequence is a pseudo random ordered list of the 20 channels, which is 20 elements long. During operation, the performance of a given channel is monitored. If the performance is deemed poor, the channel is removed from the hopping list and is replaced by another channel from the palette. The new channel is then entered into the pseudo-random ordered list of 18 unused channels. The initial ordered list of channel numbers are: 5, 9, 1, 2, 12, 7, 10, 17, 20, 27, 30, 25, 35, 36, 24, 33, 29, 23, 31, 13.

In addition, each customer is assigned a "License ID" number. Upon accepting the Software License Agreement, each customer agrees to incorporate their license ID number into their Tx and Rx firmware versions. Once the ID is imbedded in the firmware, then only Rx products with the customer's specific license ID can receive and decode the digitized audio.