

Project No.: TM-2309000356P  
Report No.: TMWK2309003422KR

FCC ID: Z3K-EVOLVESLS10  
IC: 9930A-EVOLVESLS10

Page: 1 / 26  
Rev.: 01

# RADIO TEST REPORT

## FCC 47 CFR PART 15 SUBPART E

### INDUSTRY CANADA RSS-247


|                          |                                                                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Standard            | FCC Part 15.407 +<br>IC RSS-247 issue 3 and IC RSS-GEN issue 5                                                                                      |
| Product name             | Evolve SLS 10 Monitor                                                                                                                               |
| Brand Name               | JET OPTOELECTRONICS CO., LTD.                                                                                                                       |
| Model No.                | 620105                                                                                                                                              |
| Test Result              | Pass                                                                                                                                                |
| Statements of Conformity | Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty. |

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc.(Wugu Laboratory)

Approved by:



Dally Hong  
Sr. Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: TMWK2309003422KR

Page: 2 / 26

Rev.: 01

## **Revision History**

| Rev. | Issue Date        | Revisions                        | Effect Page | Revised By |
|------|-------------------|----------------------------------|-------------|------------|
| 00   | February 16, 2024 | Initial Issue                    | ALL         | Peggy Tsai |
| 01   | February 27, 2024 | See the following Note Rev. (01) | P.1, 8      | Peggy Tsai |

Rev. (01):

1. Modify Test Standard.
2. Modify Test Methodology and Applied Standards in section 1.8.



Report No.: TMWK2309003422KR

Page: 3 / 26  
Rev.: 01

## Table of contents

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                     | <b>4</b>  |
| <b>1.1 EUT INFORMATION.....</b>                         | <b>4</b>  |
| <b>1.2 EUT CHANNEL INFORMATION .....</b>                | <b>5</b>  |
| <b>1.3 ANTENNA INFORMATION .....</b>                    | <b>6</b>  |
| <b>1.4 MEASUREMENT UNCERTAINTY .....</b>                | <b>6</b>  |
| <b>1.5 FACILITIES AND TEST LOCATION .....</b>           | <b>7</b>  |
| <b>1.6 INSTRUMENT CALIBRATION .....</b>                 | <b>7</b>  |
| <b>1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT.....</b>   | <b>8</b>  |
| <b>1.8 TEST METHODOLOGY AND APPLIED STANDARDS .....</b> | <b>8</b>  |
| <b>2. TEST SUMMERY.....</b>                             | <b>9</b>  |
| <b>3. DESCRIPTION OF TEST MODES .....</b>               | <b>10</b> |
| <b>3.1 THE WORST MODE OF OPERATING CONDITION.....</b>   | <b>10</b> |
| <b>4. TEST RESULT.....</b>                              | <b>11</b> |
| <b>4.1 TEST LIMIT.....</b>                              | <b>11</b> |
| <b>4.2 TEST PROCEDURE .....</b>                         | <b>15</b> |
| <b>4.3 TEST SETUP .....</b>                             | <b>19</b> |
| <b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>                  |           |



Report No.: TMWK2309003422KR

Page: 4 / 26

Rev.: 01

## 1. GENERAL INFORMATION

### 1.1 EUT INFORMATION

|                          |                                                                                                                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant</b>         | JET OPTOELECTRONICS CO.,LTD.<br>(FCC) 7F-2, No. 300, Yangguang St., Neihu Dist., Taipei City 11491,Taiwan<br>(IC) 3F., No. 300, Yangguang St., Neihu Dist., Taipei City 11491,Taiwan |
| <b>Manufacturer</b>      | JET OPTOELECTRONICS CO.,LTD.<br>(FCC) 7F-2, No. 300, Yangguang St., Neihu Dist., Taipei City 11491,Taiwan<br>(IC) 3F., No. 300, Yangguang St., Neihu Dist., Taipei City 11491,Taiwan |
| <b>Equipment</b>         | Evolve SLS 10 Monitor                                                                                                                                                                |
| <b>Model Name</b>        | 620105                                                                                                                                                                               |
| <b>Model Discrepancy</b> | N/A                                                                                                                                                                                  |
| <b>Brand Name</b>        | JET OPTOELECTRONICS CO., LTD.                                                                                                                                                        |
| <b>Received Date</b>     | September 21, 2023                                                                                                                                                                   |
| <b>Date of Test</b>      | October 6, 2023                                                                                                                                                                      |
| <b>Power Supply</b>      | Powered from Car Battery (DC 12V)                                                                                                                                                    |
| <b>HW Version</b>        | 20230607 D01                                                                                                                                                                         |
| <b>SW Version</b>        | MAINLINE-115   MCU version V1.2.16                                                                                                                                                   |
| <b>Serial number</b>     | H230811M5000020                                                                                                                                                                      |

**Remark:**

1. For more details, please refer to the User's manual of the EUT.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.



Report No.: TMWK2309003422KR

## 1.2 EUT CHANNEL INFORMATION

| Frequency Range     | <table border="1"> <thead> <tr> <th colspan="2">UNII-2a</th></tr> </thead> <tbody> <tr> <td>IEEE 802.11a</td><td>5260 ~ 5320 MHz</td></tr> <tr> <td>IEEE 802.11n HT20</td><td>5260 ~ 5320 MHz</td></tr> <tr> <td>IEEE 802.11ac VHT20</td><td>5260 ~ 5320 MHz</td></tr> <tr> <td>IEEE 802.11n HT40</td><td>5270 ~ 5310 MHz</td></tr> <tr> <td>IEEE 802.11ac VHT40</td><td>5270 ~ 5310 MHz</td></tr> <tr> <td>IEEE 802.11ac VHT80</td><td>5290 MHz</td></tr> </tbody> </table><br><table border="1"> <thead> <tr> <th colspan="2">UNII-2c</th></tr> </thead> <tbody> <tr> <td>IEEE 802.11a</td><td>5500 ~ 5700 MHz</td></tr> <tr> <td>IEEE 802.11n HT20</td><td>5500 ~ 5700 MHz</td></tr> <tr> <td>IEEE 802.11ac VHT20</td><td>5500 ~ 5700 MHz</td></tr> <tr> <td>IEEE 802.11n HT40</td><td>5510 ~ 5670 MHz</td></tr> <tr> <td>IEEE 802.11ac VHT40</td><td>5510 ~ 5670 MHz</td></tr> <tr> <td>IEEE 802.11ac VHT80</td><td>5530 ~ 5610 MHz</td></tr> </tbody> </table> | UNII-2a |  | IEEE 802.11a | 5260 ~ 5320 MHz | IEEE 802.11n HT20 | 5260 ~ 5320 MHz | IEEE 802.11ac VHT20 | 5260 ~ 5320 MHz | IEEE 802.11n HT40 | 5270 ~ 5310 MHz | IEEE 802.11ac VHT40 | 5270 ~ 5310 MHz | IEEE 802.11ac VHT80 | 5290 MHz | UNII-2c |  | IEEE 802.11a | 5500 ~ 5700 MHz | IEEE 802.11n HT20 | 5500 ~ 5700 MHz | IEEE 802.11ac VHT20 | 5500 ~ 5700 MHz | IEEE 802.11n HT40 | 5510 ~ 5670 MHz | IEEE 802.11ac VHT40 | 5510 ~ 5670 MHz | IEEE 802.11ac VHT80 | 5530 ~ 5610 MHz |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--|--------------|-----------------|-------------------|-----------------|---------------------|-----------------|-------------------|-----------------|---------------------|-----------------|---------------------|----------|---------|--|--------------|-----------------|-------------------|-----------------|---------------------|-----------------|-------------------|-----------------|---------------------|-----------------|---------------------|-----------------|
| UNII-2a             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11a        | 5260 ~ 5320 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11n HT20   | 5260 ~ 5320 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11ac VHT20 | 5260 ~ 5320 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11n HT40   | 5270 ~ 5310 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11ac VHT40 | 5270 ~ 5310 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11ac VHT80 | 5290 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| UNII-2c             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11a        | 5500 ~ 5700 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11n HT20   | 5500 ~ 5700 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11ac VHT20 | 5500 ~ 5700 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11n HT40   | 5510 ~ 5670 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11ac VHT40 | 5510 ~ 5670 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| IEEE 802.11ac VHT80 | 5530 ~ 5610 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |
| Modulation Type     | <ol style="list-style-type: none"> <li>1. IEEE 802.11a mode: OFDM</li> <li>2. IEEE 802.11n HT 20 MHz mode: OFDM</li> <li>3. IEEE 802.11n HT 40 MHz mode: OFDM</li> <li>4. IEEE 802.11ac VHT 20 MHz mode: OFDM</li> <li>5. IEEE 802.11ac VHT 40 MHz mode: OFDM</li> <li>6. IEEE 802.11ac VHT 80 MHz mode: OFDM</li> </ol>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |          |         |  |              |                 |                   |                 |                     |                 |                   |                 |                     |                 |                     |                 |

### Remark:

1. Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels
2. For Canada the EUT Frequency Range 5600~5650MHz will be disabled.

| Number of frequencies to be tested                   |                       |                                              |
|------------------------------------------------------|-----------------------|----------------------------------------------|
| Frequency range in which device operates             | Number of frequencies | Location in frequency range of operation     |
| <input type="checkbox"/> 1 MHz or less               | 1                     | Middle                                       |
| <input type="checkbox"/> 1 MHz to 10 MHz             | 2                     | 1 near top and 1 near bottom                 |
| <input checked="" type="checkbox"/> More than 10 MHz | 3                     | 1 near top, 1 near middle, and 1 near bottom |



Report No.: TMWK2309003422KR  
**1.3 ANTENNA INFORMATION**

|                       |                                                                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Antenna Type          | <input checked="" type="checkbox"/> PIFA <input type="checkbox"/> PCB <input type="checkbox"/> Dipole <input type="checkbox"/> Coils |
| Antenna Specification | 5250~5350:<br>Gain: 3.8 dBi<br>Power Directional Gain: 6.81 dBi<br>5470~5725:<br>Gain: 3.8 dBi<br>Power Directional Gain: 6.81 dBi   |
| Antenna connector     | N/A                                                                                                                                  |

**Notes:**

1. Power Directional Gain:  $10\log(((10^{\text{Ant1}/10}) + 10^{\text{Ant2}/10})/2)$
2. The antenna(s) of the EUT are permanently attached and there are no provisions for connection to an external antenna. So the EUT complies with the requirements of §15.203.

**1.4 MEASUREMENT UNCERTAINTY**

| PARAMETER                  | UNCERTAINTY            |
|----------------------------|------------------------|
| Channel Bandwidth          | $\pm 2.7 \%$           |
| RF output power (Spectrum) | $\pm 2.440 \text{ dB}$ |
| Power Spectral density     | $\pm 2.739 \text{ dB}$ |

**Remark:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.



Report No.: TMWK2309003422KR

## 1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan.

☐ No. 12, Ln. 116, Wugong 3rd Rd., Wugu Dist., New Taipei City, Taiwan 24803

CAB identifier: TW1309

| Test site | Test Engineer | Remark |
|-----------|---------------|--------|
| DFS       | Jerry Chang   | -      |

**Remark:** The lab has been recognized as the FCC accredited lab. under the KDB 974614 D01 and is listed in the FCC pubic Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309

## 1.6 INSTRUMENT CALIBRATION

| DFS Test                |                                                               |                   |                           |                  |                 |
|-------------------------|---------------------------------------------------------------|-------------------|---------------------------|------------------|-----------------|
| Name of Equipment       | Manufacturer                                                  | Model             | Serial Number             | Calibration Date | Calibration Due |
| EXA Signal Analyzer     | Keysight                                                      | N9010A            | MY54200716                | 2022-10-13       | 2023-10-12      |
| Attenuator              | E-INSTRUMENT                                                  | EPA-600H          | EC1400050                 | 2023-06-13       | 2024-06-12      |
| Vector Signal Generator | KEYSIGHT                                                      | N5182B/N5182BX 07 | MY61252828/<br>MY59362552 | 2023-02-01       | 2024-01-31      |
| DC Power Source         | GWINSTEK                                                      | SPS-3610          | GPE880163                 | 2022-12-02       | 2023-12-03      |
| Power Divider           | Marvelous Microwave                                           | MVE8586           | 16011202                  | 2023-06-16       | 2024-06-15      |
| Power Divider           | Marvelous Microwave                                           | MVE8586           | 16011201                  | 2023-06-16       | 2024-06-15      |
| Power Divider           | Marvelous Microwave                                           | MVE8586           | 16011206                  | 2023-07-04       | 2024-07-03      |
| Power Divider           | Solvang Technology                                            | STI08-0015        | 008                       | 2023-07-11       | 2024-07-10      |
| Cable                   | Woken                                                         | SUMITOMO          | 13                        | 2023-03-02       | 2024-03-01      |
| Cable                   | Woken                                                         | SUMITOMO          | 12                        | 2023-03-02       | 2024-03-01      |
| Cable                   | Woken                                                         | SUMITOMO          | 11                        | 2023-03-02       | 2024-03-01      |
| Cable                   | Woken                                                         | SUMITOMO          | 10                        | 2023-03-02       | 2024-03-01      |
| Cable                   | Woken                                                         | SUMITOMO          | 9                         | 2023-03-02       | 2024-03-01      |
| Cable                   | Woken                                                         | SUMITOMO          | 7                         | 2023-03-02       | 2024-03-01      |
| Cable                   | Woken                                                         | SUMITOMO          | 6                         | 2023-03-02       | 2024-03-01      |
| Cable                   | Woken                                                         | SUMITOMO          | 5                         | 2023-03-02       | 2024-03-01      |
| Cable                   | Woken                                                         | SUMITOMO          | 4                         | 2023-03-02       | 2024-03-01      |
| Software                | GPIBShot,DFS Test Software,DFS Radar Profiles 2022 Update 1.0 |                   |                           |                  |                 |

**Remark:**

- Each piece of equipment is scheduled for calibration once a year.
- N.C.R. = No Calibration Required.



Report No.: TMWK2309003422KR

Page: 8 / 26

Rev.: 01

## 1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

| Device | Brand  | Model    | BSMI ID | FCC ID       | IC             |
|--------|--------|----------|---------|--------------|----------------|
| NB     | Lenovo | TP00075A | R33B65  | N/A          | N/A            |
| NB     | Lenovo | V4400u   | N/A     | N/A          | N/A            |
| AP     | ASUS   | RT-AX88U | N/A     | MSQ-RTAXHP00 | 3568A-RTAXHP00 |

## 1.8 TEST METHODOLOGY AND APPLIED STANDARDS

### Normal Mode

Connect the EUT to the laptop, use the test software (adb.exe) to set according to the test requirements, search for the AP SSID to connect and enter the command to push the packet to execute the test.

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.407, KDB 789033 D02, KDB 905462 D02, RSS-247 Issue 3 and RSS-GEN Issue 5.



Page: 9 / 26  
Rev.: 01

Report No.: TMWK2309003422KR

## 2. TEST SUMMERY

| FCC<br>Standard<br>Sec. | IC<br>Standard Sec. | Chapter | Test Item                   | Result |
|-------------------------|---------------------|---------|-----------------------------|--------|
| 15.203                  | RSS-Gen (6.8)       | 1.3     | Antenna Requirement         | Pass   |
| 15.407(h)               | RSS-247(6.3)        | 4.1     | Dynamic Frequency Selection | Pass   |

### 3. DESCRIPTION OF TEST MODES

#### 3.1 THE WORST MODE OF OPERATING CONDITION

| Operation mode                                 | 1. IEEE 802.11a mode: 6Mbps<br>2. IEEE 802.11n HT 20 MHz mode: MCS0<br>3. IEEE 802.11n HT 40 MHz mode: MCS0<br>4. IEEE 802.11ac VHT 20 MHz mode: MCS0<br>5. IEEE 802.11ac VHT 40 MHz mode: MCS0<br>6. IEEE 802.11ac VHT 80 MHz mode: MCS0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|-----------------------|----------|--------------|------------------|-------------------|------------------|-------------------|------------|---------------------|------------------|---------------------|------------|---------------------|------|----------|--------------|------------------|-------------------|------------------|-------------------|------------------|---------------------|------------------|---------------------|------------------|---------------------|------------|
| Operating Frequency Range & Number of Channels | <table><tr><th></th><th>Mode</th><th>Frequency Range (MHz)</th></tr><tr><td rowspan="6">U-NII-2a</td><td>IEEE 802.11a</td><td>5260, 5300, 5320</td></tr><tr><td>IEEE 802.11n HT20</td><td>5260, 5300, 5320</td></tr><tr><td>IEEE 802.11n HT40</td><td>5270, 5310</td></tr><tr><td>IEEE 802.11ac VHT20</td><td>5260, 5300, 5320</td></tr><tr><td>IEEE 802.11ac VHT40</td><td>5270, 5310</td></tr><tr><td>IEEE 802.11ac VHT80</td><td>5290</td></tr><tr><td rowspan="6">U-NII-2c</td><td>IEEE 802.11a</td><td>5500, 5580, 5700</td></tr><tr><td>IEEE 802.11n HT20</td><td>5500, 5580, 5700</td></tr><tr><td>IEEE 802.11n HT40</td><td>5510, 5550, 5670</td></tr><tr><td>IEEE 802.11ac VHT20</td><td>5500, 5580, 5700</td></tr><tr><td>IEEE 802.11ac VHT40</td><td>5510, 5550, 5670</td></tr><tr><td>IEEE 802.11ac VHT80</td><td>5530, 5610</td></tr></table> |                       | Mode | Frequency Range (MHz) | U-NII-2a | IEEE 802.11a | 5260, 5300, 5320 | IEEE 802.11n HT20 | 5260, 5300, 5320 | IEEE 802.11n HT40 | 5270, 5310 | IEEE 802.11ac VHT20 | 5260, 5300, 5320 | IEEE 802.11ac VHT40 | 5270, 5310 | IEEE 802.11ac VHT80 | 5290 | U-NII-2c | IEEE 802.11a | 5500, 5580, 5700 | IEEE 802.11n HT20 | 5500, 5580, 5700 | IEEE 802.11n HT40 | 5510, 5550, 5670 | IEEE 802.11ac VHT20 | 5500, 5580, 5700 | IEEE 802.11ac VHT40 | 5510, 5550, 5670 | IEEE 802.11ac VHT80 | 5530, 5610 |
|                                                | Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Frequency Range (MHz) |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
| U-NII-2a                                       | IEEE 802.11a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 5260, 5300, 5320      |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11n HT20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 5260, 5300, 5320      |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11n HT40                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 5270, 5310            |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11ac VHT20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 5260, 5300, 5320      |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11ac VHT40                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 5270, 5310            |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11ac VHT80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 5290                  |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
| U-NII-2c                                       | IEEE 802.11a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 5500, 5580, 5700      |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11n HT20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 5500, 5580, 5700      |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11n HT40                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 5510, 5550, 5670      |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11ac VHT20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 5500, 5580, 5700      |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11ac VHT40                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 5510, 5550, 5670      |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |
|                                                | IEEE 802.11ac VHT80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 5530, 5610            |      |                       |          |              |                  |                   |                  |                   |            |                     |                  |                     |            |                     |      |          |              |                  |                   |                  |                   |                  |                     |                  |                     |                  |                     |            |

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.



## 4. TEST RESULT

### 4.1 TEST LIMIT

FCC according to §15.407 (h), KDB 905462 D02 "compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection". and KDB 905462 D03 " U-NII client devices without radar detection capability.

IC according RSS-247 section 6.3, and it harmonized with FCC Part 15 DFS rules. The EIRP refer section 4.3 output power measurement in this report.

**Table 1: Applicability of DFS requirements prior to use of a channel**

| Requirement                     | Operational Mode |                                  |                              |
|---------------------------------|------------------|----------------------------------|------------------------------|
|                                 | Master           | Client (without radar detection) | Client(with radar detection) |
| Non-Occupancy Period            | Yes              | Not required                     | Yes                          |
| DFS Detection Threshold         | Yes              | Not required                     | Yes                          |
| Channel Availability Check Time | Yes              | Not required                     | Not required                 |
| U-NII Detection Bandwidth       | Yes              | Not required                     | Yes                          |

**Table 2: Applicability of DFS requirements during normal operation**

| Requirement                       | Operational Mode                             |                                |
|-----------------------------------|----------------------------------------------|--------------------------------|
|                                   | Master Device or Client with Radar Detection | Client Without Radar Detection |
| DFS Detection Threshold           | Yes                                          | Not required                   |
| Channel Closing Transmission Time | Yes                                          | Yes                            |
| Channel Move Time                 | Yes                                          | Yes                            |
| U-NII Detection Bandwidth         | Yes                                          | Not required                   |

|                                                                                                                                                                                                                                                                                                                                                       |                                              |                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|------------------------------------------------------|
| Additional requirements for devices with multiple bandwidth mods                                                                                                                                                                                                                                                                                      | Master Device or Client with Radar Detection | Client Without Radar Detection                       |
| U-NII Detection Bandwidth and Statistical Performance Check                                                                                                                                                                                                                                                                                           | All BW modes must be tested                  | Not required                                         |
| Channel Move Time and Channel Closing Transmission Time                                                                                                                                                                                                                                                                                               | Test using widest BW mode available          | Test using the widest BW mode available for the link |
| All other tests                                                                                                                                                                                                                                                                                                                                       | Any single BW mode                           | Not required                                         |
| Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. |                                              |                                                      |

**Table 3: Interference Threshold values, Master or Client incorporating In-Service**

| Maximum Transmit Power                                                       | Value (See Notes 1, 2, and 3) |
|------------------------------------------------------------------------------|-------------------------------|
| EIRP $\geq$ 200 milliwatt                                                    | -64 dBm                       |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz                 | -62 dBm                       |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement | -64 dBm                       |

**Note 1:** This is the level at the input of the receiver assuming a 0 dBi receive antenna.

**Note 2:** Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

**Note3:** EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

**Table 4: DFS Response requirement values**

| Parameter                         | Value                                                                                                  |
|-----------------------------------|--------------------------------------------------------------------------------------------------------|
| Non-occupancy period              | Minimum 30 minutes                                                                                     |
| Channel Availability Check Time   | 60 seconds                                                                                             |
| Channel Move Time                 | 10 seconds See Note 1.                                                                                 |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| U-NII Detection Bandwidth         | Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.                                |

**Note 1:** Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

**Note 2:** The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



**Table 5 – Short Pulse Radar Test Waveforms**

| Radar Type                                                                                                                                  | Pulse Width (μsec) | PRI (μsec)                                                                                                                                                    | Number of Pulses                                                                                                              | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|
| 0                                                                                                                                           | 1                  | 1428                                                                                                                                                          | 18                                                                                                                            | See Note 1                                 |                          |
| 1                                                                                                                                           | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a                                                                     | Roundup $\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$ | 60%                                        | 30                       |
|                                                                                                                                             |                    | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A |                                                                                                                               |                                            |                          |
| 2                                                                                                                                           | 1-5                | 150-230                                                                                                                                                       | 23-29                                                                                                                         | 60%                                        | 30                       |
| 3                                                                                                                                           | 6-10               | 200-500                                                                                                                                                       | 16-18                                                                                                                         | 60%                                        | 30                       |
| 4                                                                                                                                           | 11-20              | 200-500                                                                                                                                                       | 12-16                                                                                                                         | 60%                                        | 30                       |
| Aggregate (Radar Types 1-4)                                                                                                                 |                    |                                                                                                                                                               |                                                                                                                               | 80%                                        | 120                      |
| <b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |                                                                                                                                                               |                                                                                                                               |                                            |                          |



Report No.: TMWK2309003422KR

Page: 14 / 26

Rev.: 01

**Table 6 – Long Pulse Radar Test Signal**

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--------------------------------------------|--------------------------|
| 5          | 50-100             | 5-20              | 1000-2000  | 1-3                        | 8-20             | 80%                                        | 30                       |

**Table 7 – Frequency Hopping Radar Test Signal**

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--------------------------------------------|--------------------------|
| 6          | 1                  | 333        | 9              | 0.333              | 300                            | 70%                                        | 30                       |



Report No.: TMWK2309003422KR

Page: 15 / 26  
Rev.: 01

## 4.2 TEST PROCEDURE

### Overview Of EUT With Respect To §15.407 (H) Requirements

The firmware installed in the EUT during testing was:

**Firmware Rev: 10.0.19043.1586**

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz range as a Client Device that does not have radar detection capability.

The EUT uses one transmitter connected to two 50-ohm coaxial antenna ports via a diversity switch. Only one antenna port is connected to the test system since the EUT has one antenna only.

The Slave device associated with the EUT during these tests does not have radar detection capability.

WLAN traffic is generated by streaming the video file TestFile.mp2 “6 ½ Magic Hours” from the Master to the Slave in full motion video mode using the media player with the V2.61 Codec package.

The minimum DFS detection threshold for devices with a maximum e.i.r.p. of 200 mW to 1 W is -64 dBm. For devices that operate with less than 200 mW eirp and a power spectral density of less than 10 dBm in a 1 MHz band, the minimum detection threshold is -62 dBm. The detection threshold is the received power averaged over 1 microsecond referenced to a 0 dBi antenna. For the initial channel setting, the manufacturers shall be permitted to provide for either random channel selection or manual channel selection.



## **TEST AND MEASUREMENT SYSTEM**

### **System Overview**

The measurement system is based on a conducted test method.

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.


The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold. The time-domain resolution is 3 msec / bin with a 24 second sweep time, meeting the 22 second long pulse reporting criteria and allowing a minimum of 10 seconds after the end of the long pulse waveform.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), 50 ohm termination would be removed from the splitter so that connection can be established between splitter and the Master and/or Slave devices.

### **Conducted Method System Block Diagram**

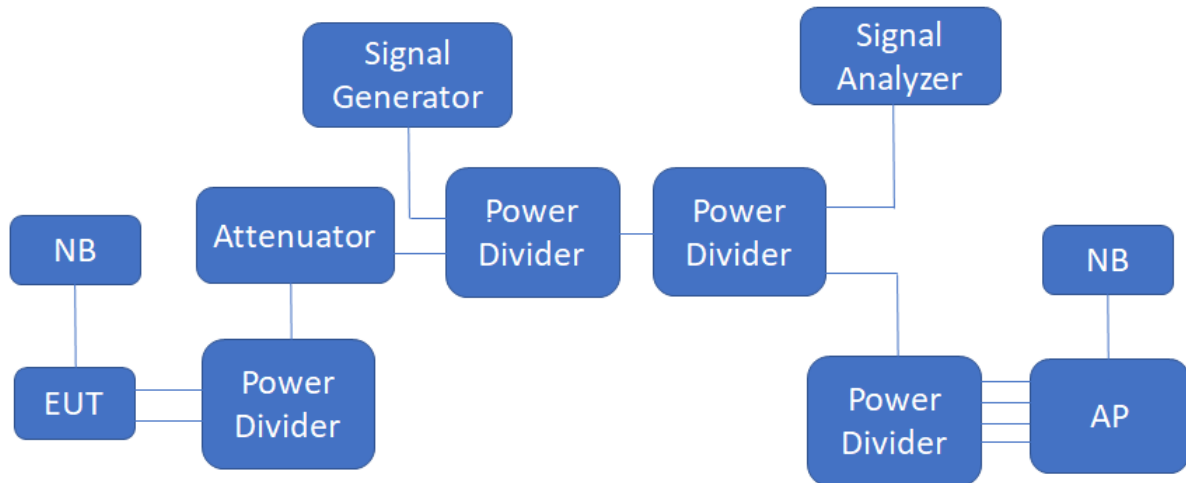

### **System Calibration**

Connect the spectrum analyzer to the test system in place of the master device. Set the signal generator to CW mode. Adjust the amplitude of the signal generator to yield a measured level of  $-62$  dBm on the spectrum analyzer.

Without changing any of the instrument settings, reconnect the spectrum analyzer to the Common port of the Spectrum Analyzer Combiner/Divider and connect a 50 ohm load to the Master Device port of the test system.

Measure the amplitude and calculate the difference from  $-62$  dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference. Confirm that the signal is displayed at  $-62$  dBm. Readjust the RBW and VBW to 3 MHz, set the span to 10 MHz, and confirm that the signal is still displayed at  $-62$  dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of  $-62$  dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.



### **Adjustment Of Displayed Traffic Level**

Establish a link between the Master and Slave, adjusting the Link Step Attenuator as needed to provide a suitable received level at the Master and Slave devices. Stream the video test file to generate WLAN traffic. Confirm that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold. Confirm that the displayed traffic is from the Master Device. For Master Device testing confirm that the displayed traffic does not include Slave Device traffic. For Slave Device testing confirm that the displayed traffic does not include Master Device traffic.


If a different setting of the Master Step Attenuator is required to meet the above conditions, perform a new System Calibration for the new Master Step Attenuator setting.

### **Channel Loading**

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

- a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
- b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
- c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time). This can be done with any appropriate channel BW and modulation type.
- d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.

## 4.3 TEST SETUP

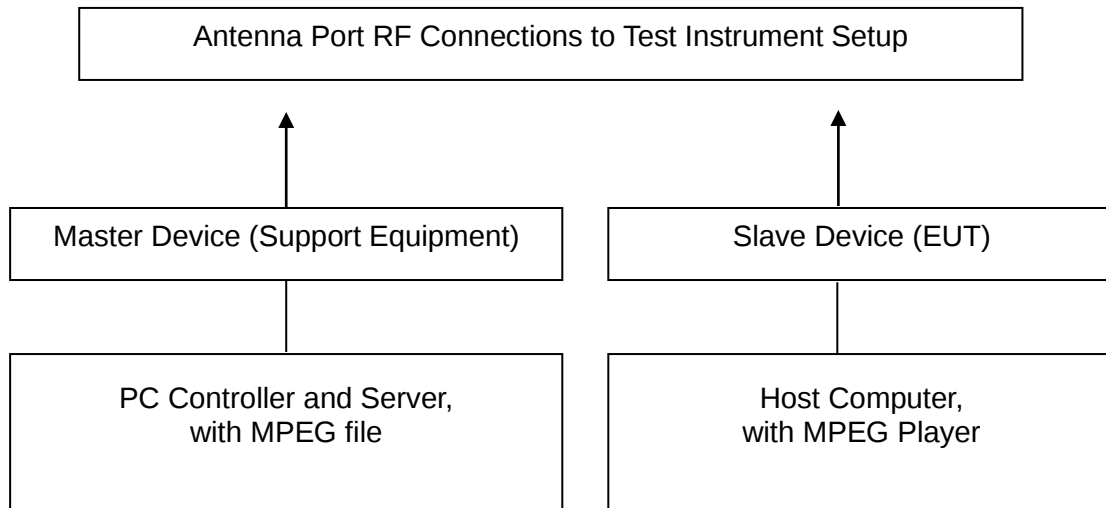




Report No.: TMWK2309003422KR

Page: 20 / 26  
Rev.: 01

### 4.3.1 Test Result

Temperature: 25.1°C  
Humidity: 55% RH

Test date: October 6, 2023  
Tested by: Jerry Chang

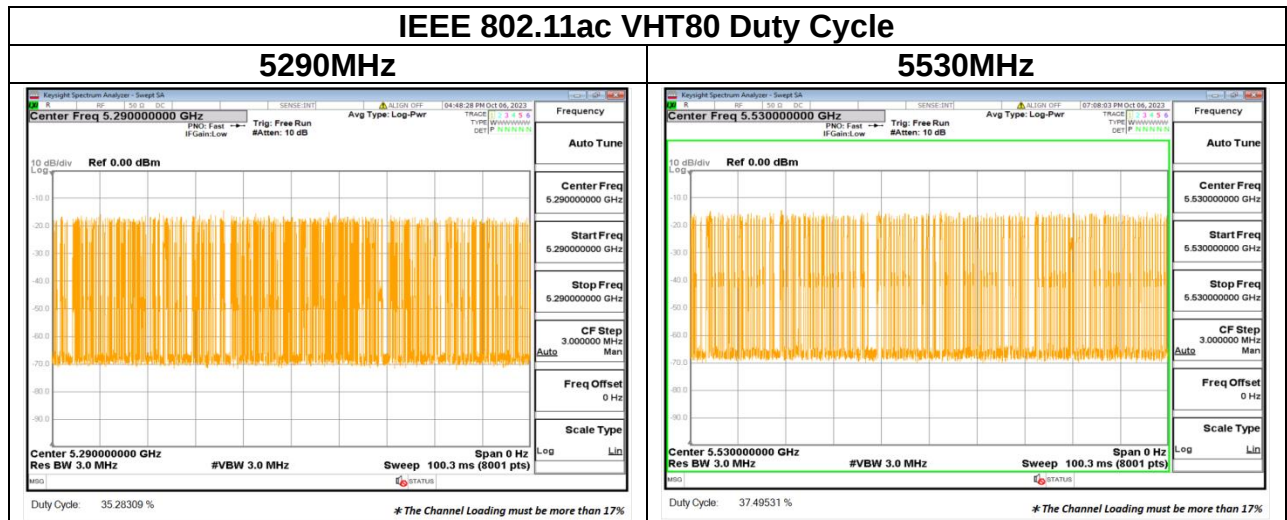




Report No.: TMWK2309003422KR

Page: 21 / 26  
Rev.: 01


**PLOT OF WLAN TRAFFIC FROM SLAVE**  
**Band 2**  
**IEEE 802.11ac VHT80 mode / 5290 MHz**  
**Radar Waveforms**  
**Sample of short Pulse Radar Type 0**

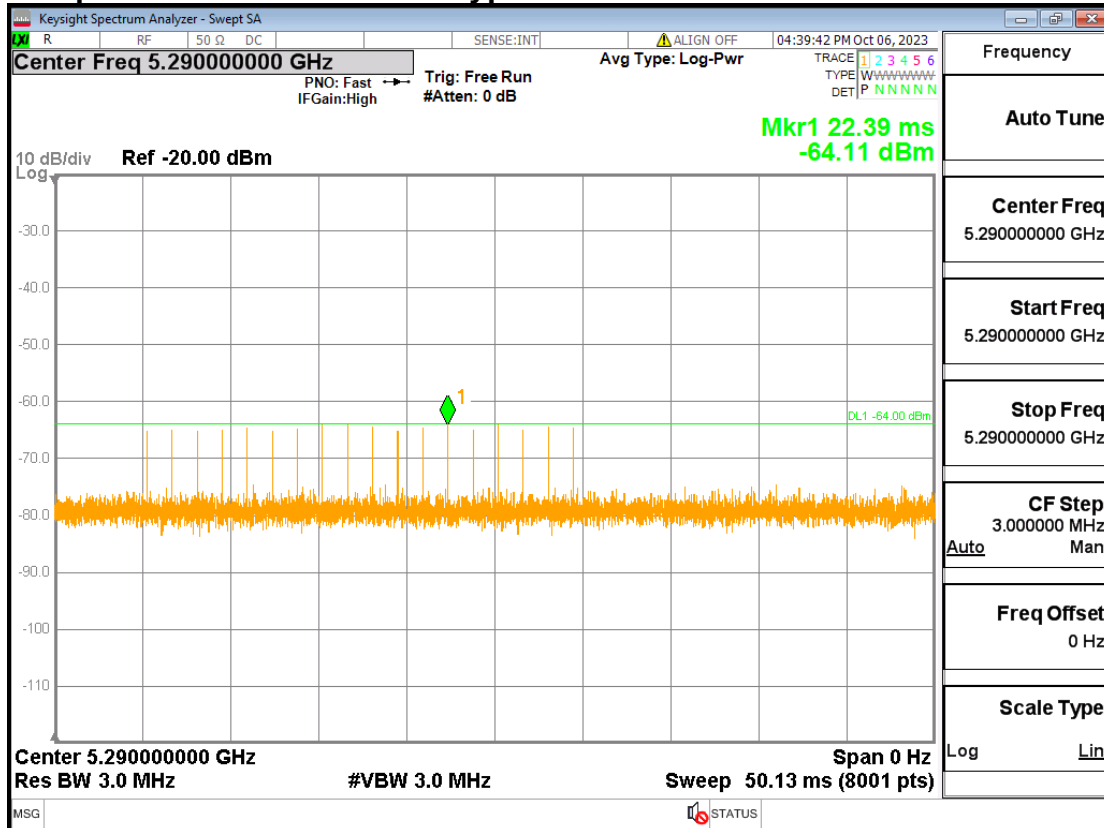



Report No.: TMWK2309003422KR

**Band 3**  
**IEEE 802.11ac VHT80 mode / 5530 MHz**  
**Radar Waveforms**  
**Sample of short Pulse Radar Type 0**

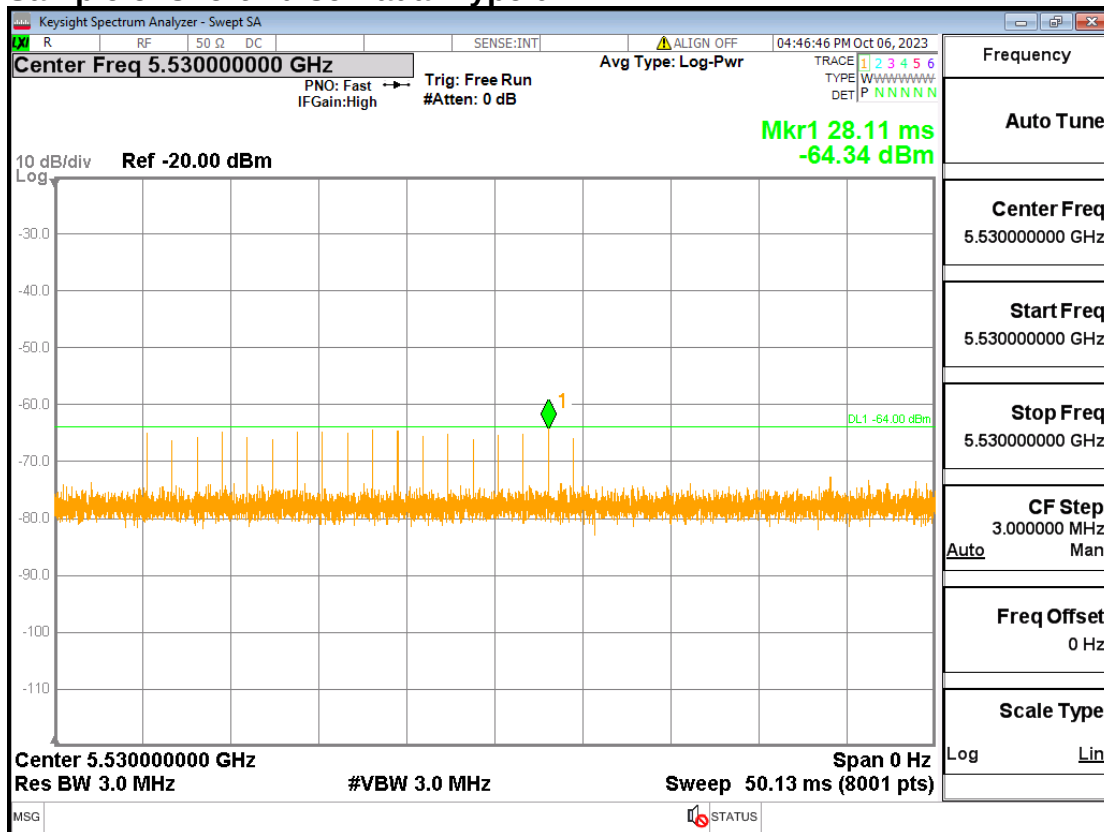



Report No.: TMWK2309003422KR

Page: 23 / 26  
Rev.: 01

## **TEST CHANNEL AND METHOD**

All tests were performed at a channel center frequency of 5290 MHz and 5530 MHz utilizing a conducted test method.

## **CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME**

### **GENERAL REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

(Number of analyzer bins showing transmission) \* (dwell time per bin)

The observation period over which the aggregate time is calculated

Begins at (Reference Marker + 200 msec) and

Ends no earlier than (Reference Marker + 10 sec).





Report No.: TMWK2309003422KR

Page: 24 / 26  
Rev.: 01

**Type 0 Channel Move Time Results & Channel Closing Transmission Time Results**

| Channel Shutdown Result         |             |                   |                                                      |                      |
|---------------------------------|-------------|-------------------|------------------------------------------------------|----------------------|
| Detection Threshold Level (dBm) |             |                   | -64                                                  |                      |
| Modulation Mode                 | Freq. (MHz) | Radar Test Signal | Channel Closing Transmission Time(ms)<br>200ms~10sec | Channel Move Time(s) |
| VHT80                           | 5290        | Type 0            | 10                                                   | 0.464                |
| VHT80                           | 5530        | Type 0            | 8                                                    | 0.488                |
| Limit                           |             |                   | 60 ms                                                | 10 sec               |
| Result                          |             |                   | Complied                                             |                      |

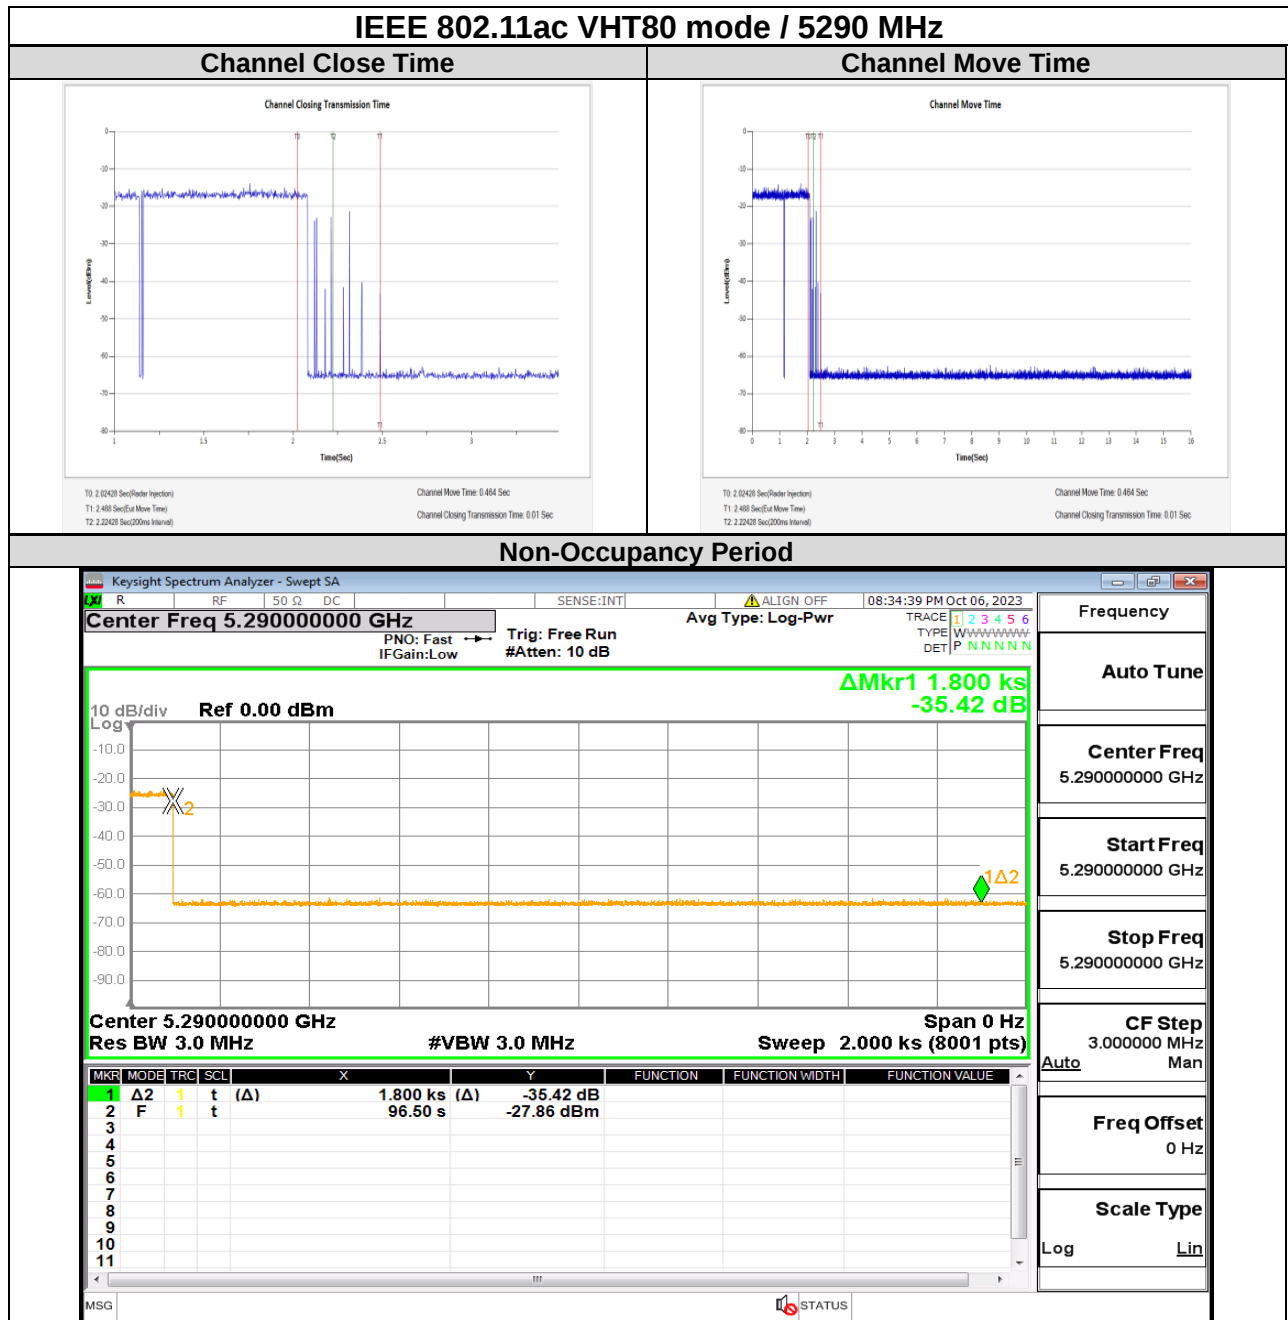

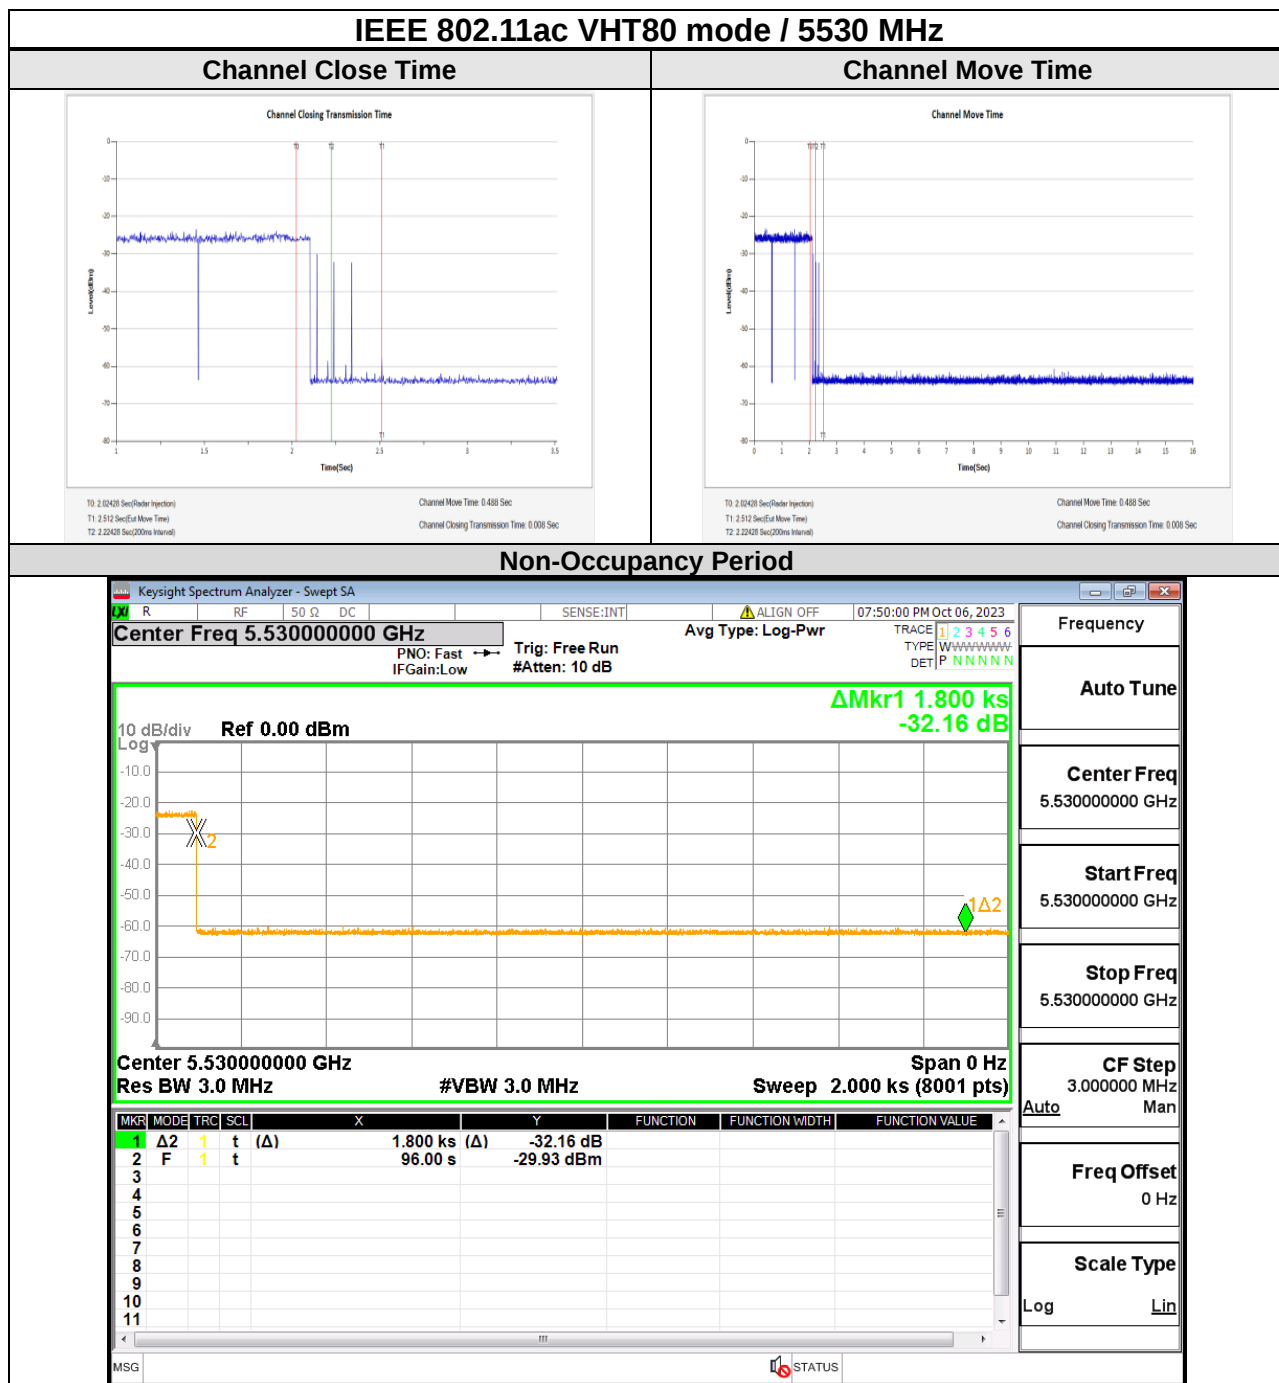

--End of Test Report--