



# FCC TEST REPORT (WLAN)

**REPORT NO.:** RF140221E06

**MODEL NO.:** UBW1J1-1AXY-ZZ  
(X= 0~9 or A~Z, Shell Colour ; Y= 0~9 or A~Z,  
Cosmetic Variant ; Z =0~9 or A~Z, Brand digit #1 ;  
Z= 0~9 or A~Z, Brand digit #2)

**FCC ID:** Z3M-GUBW1J1

**RECEIVED:** Feb. 21, 2014

**TESTED:** Feb. 27 to Mar. 28, 2014

**ISSUED:** Apr. 16, 2014

**APPLICANT:** Greenwave Reality Pte Ltd

**ADDRESS:** 41 Science Park Road, #03-01, The Gemini,  
Science Park II, Singapore, 117610 Singapore

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.)  
Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

This report should not be used by the client to claim  
product certification, approval, or endorsement by TAF  
or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

## Table of Contents

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY .....	7
3. GENERAL INFORMATION .....	8
3.1 GENERAL DESCRIPTION OF EUT(WLAN).....	8
3.2 DESCRIPTION OF TEST MODES.....	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	13
3.4 Duty cycle of test signal.....	14
3.5 DESCRIPTION OF SUPPORT UNITS.....	15
3.6 CONFIGURATION OF SYSTEM UNDER TEST .....	15
4. TEST TYPES AND RESULTS.....	16
4.1 CONDUCTED EMISSION MEASUREMENT .....	16
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	16
4.1.2 TEST INSTRUMENTS .....	16
4.1.3 TEST PROCEDURES.....	17
4.1.4 DEVIATION FROM TEST STANDARD .....	17
4.1.5 TEST SETUP .....	17
4.1.6 EUT OPERATING CONDITIONS.....	18
4.1.7 TEST RESULTS.....	19
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	21
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	21
4.2.2 TEST INSTRUMENTS .....	22
4.2.3 TEST PROCEDURES.....	23
4.2.4 DEVIATION FROM TEST STANDARD .....	23
4.2.5 TEST SETUP .....	24
4.2.6 EUT OPERATING CONDITIONS.....	24
4.2.7 TEST RESULTS.....	25
4.3 6dB BANDWIDTH MEASUREMENT .....	38
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	38
4.3.2 TEST INSTRUMENTS .....	38
4.3.3 TEST PROCEDURE .....	38
4.3.4 DEVIATION FROM TEST STANDARD .....	38
4.3.5 TEST SETUP .....	38
4.3.6 EUT OPERATING CONDITIONS.....	38
4.3.7 TEST RESULTS.....	39



A D T

4.4	CONDUCTED OUTPUT POWER .....	41
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	41
4.4.2	INSTRUMENTS .....	41
4.4.3	TEST PROCEDURES.....	41
4.4.4	DEVIATION FROM TEST STANDARD .....	41
4.4.5	TEST SETUP .....	41
4.4.6	EUT OPERATING CONDITIONS.....	41
4.4.7	TEST RESULTS.....	42
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	44
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	44
4.5.2	TEST INSTRUMENTS .....	44
4.5.3	TEST PROCEDURE .....	44
4.5.4	DEVIATION FROM TEST STANDARD .....	44
4.5.5	TEST SETUP .....	44
4.5.6	EUT OPERATING CONDITION .....	44
4.5.7	TEST RESULTS.....	45
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	47
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT .....	47
4.6.2	TEST INSTRUMENTS .....	47
4.6.3	TEST PROCEDURE .....	47
4.6.4	DEVIATION FROM TEST STANDARD .....	48
4.6.5	TEST SETUP .....	48
4.6.6	EUT OPERATING CONDITION .....	48
4.6.7	TEST RESULTS.....	48
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	53
6.	INFORMATION ON THE TESTING LABORATORIES .....	54
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	55



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140221E06	Original release	Apr. 16, 2014





A D T

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.55dB at 0.16562MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 4824.00MHz & 4924.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.



A D T

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.65 dB
Radiated emissions (6GHz -18GHz)	3.88 dB



A D T

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT(WLAN)

<b>PRODUCT</b>	Lighting Gateway
<b>MODEL NO.</b>	UBW1J1-1AXY-ZZ (X= 0~9 or A~Z, Shell Colour ; Y= 0~9 or A~Z, Cosmetic Variant ; Z =0~9 or A~Z, Brand digit #1 ; Z= 0~9 or A~Z, Brand digit #2)
<b>POWER SUPPLY</b>	DC 3.3V from internal power board
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS,OFDM
<b>TRANSFER RATE</b>	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 150Mbps
<b>OPERATING FREQUENCY</b>	2.412 ~ 2.462GHz
<b>NUMBER OF CHANNEL</b>	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
<b>MAXIMUM OUTPUT POWER</b>	802.11b: 113.763mW 802.11g: 161.808mW 802.11n (HT20): 161.065mW 802.11n (HT40): 83.946mW
<b>ANTENNA TYPE</b>	Please see NOTE
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Refer to user's manual
<b>ASSOCIATED DEVICES</b>	NA

#### NOTE:

1. The EUT Model Name is UBW1J1-1AXY-ZZ (X= 0~9 or A~Z, Shell Colour ; Y= 0~9 or A~Z, Cosmetic Variant ; Z =0~9 or A~Z, Brand digit #1 ; Z= 0~9 or A~Z, Brand digit #2), The model: UBW1J1-1A01-TP was selected as representative model for the test and its data was recorded in this report.
2. There are WLAN technology and Zigbee technology used for the EUT.



3. The antennas provided to the EUT, please refer to the following table:

<b>WLAN Antenna Spec.</b>			
Antenna Type	Antenna Connector	Gain(dBi)	Frequency range (GHz)
PCB	NA	0.07	2.4~2.4835
<b>Zigbee Antenna Spec.</b>			
Antenna Type	Antenna Connector	Gain(dBi)	Frequency range (GHz)
PCB	NA	1.14	2.4~2.4835

4. The EUT incorporates a SISO function.

<b>MODULATION MODE</b>	<b>TX/RX FUNCTION</b>
<b>802.11b</b>	1TX/1RX
<b>802.11g</b>	1TX/1RX
<b>802.11n (HT20)</b>	1TX/1RX
<b>802.11n (HT40)</b>	1TX/1RX

5. The EUT must be supplied with an internal power board as below table:

Brand	Model No.	Spec.
WNC	55.LRG1P.DGX (X=0~9, for marketing)	AC Input: 88 - 132V DC Output: 3.3V

6. Spurious emission of the simultaneous operation (WLAN & Zigbee) has been evaluated and no non-compliance was found.
7. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 7.
8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

### 3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission      **RE < 1G**: Radiated Emission below 1GHz  
**RE ≥ 1G**: Radiated Emission above 1GHz      **APCM**: Antenna Port Conducted Measurement  
**OB**: Conducted Out-Band Emission Measurement

**NOTE:** 1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5



A D T

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

**CONDUCTED OUT-BAND EMISSION MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	24deg. C, 67%RH	120Vac, 60Hz	Jason Huang
RE<1G	23deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
RE <sup>3</sup> 1G	23deg. C, 65%RH	120Vac, 60Hz	Nelson Teng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng
OB	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v03r01**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DUTY CYCLE OF TEST SIGNAL


If duty cycle of test signal is > 98 %, duty factor is not required.

**802.11b:** Duty cycle = 32.162 ms/32.262 ms = 0.997

**802.11g:** Duty cycle = 5.357 ms/5.41 ms = 0.99

**802.11n (HT20):** Duty cycle = 4.957 ms/5.012 ms = 0.989

**802.11n (HT40):** Duty cycle = 2.406 ms/2.446 ms = 0.984

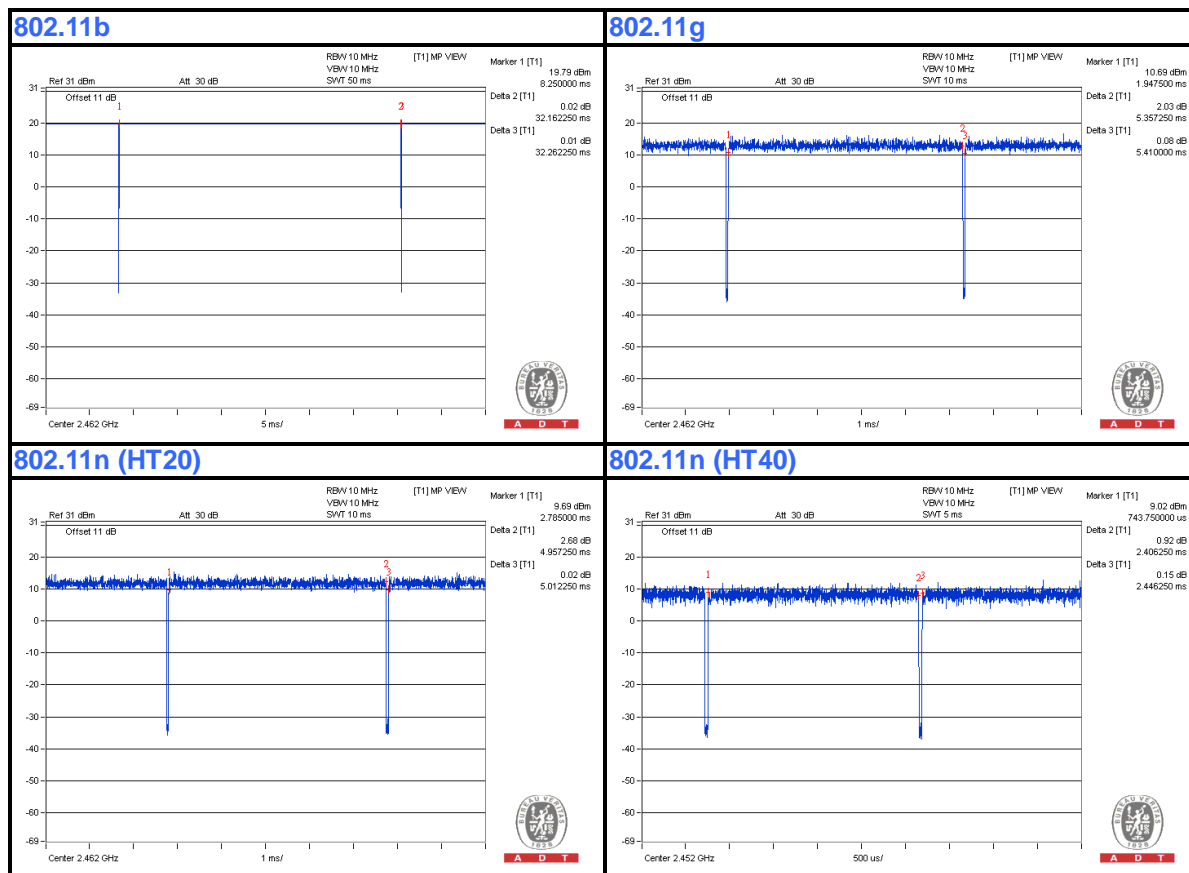




A D T

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

### 3.6 CONFIGURATION OF SYSTEM UNDER TEST

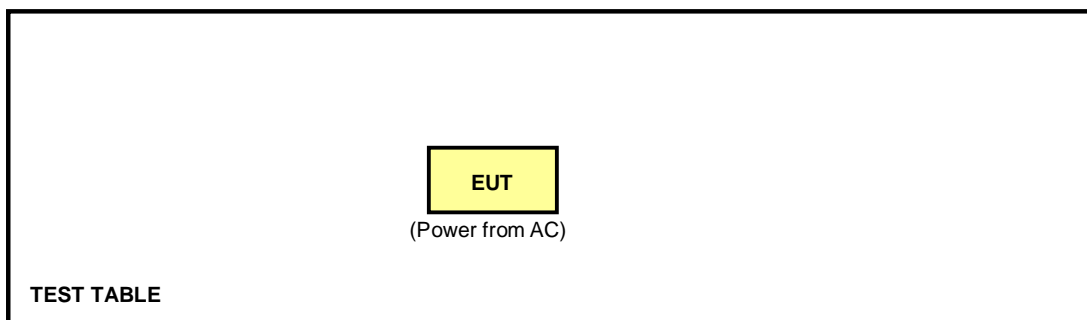



## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	847124/029	Oct. 21, 2013	Oct. 20, 2014
Line-Impedance Stabilization Network (for EUT) ROHDE & SCHWARZ	NSLK-8127	5127-523	Oct. 02, 2013	Oct. 01, 2014
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COACAB-001	May 27, 2013	May 26, 2014
50 ohms Terminator	50	3	Oct. 17, 2013	Oct. 16, 2014
50 ohms Terminator	N/A	EMC-04	Oct. 17, 2013	Oct. 16, 2014
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: Feb. 27, 2014



### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


**NOTE:**

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

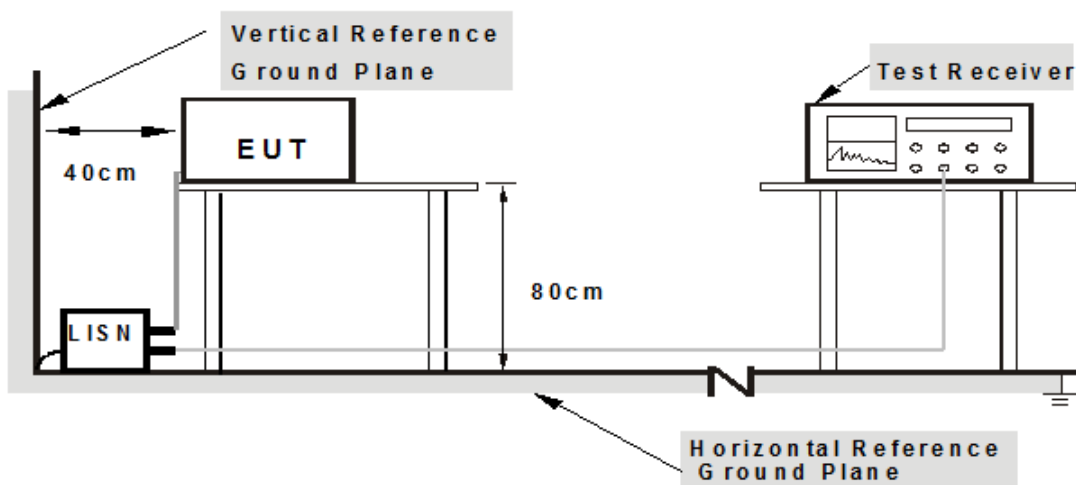

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

1. Controlling software (artgui.exe(Version:2.3)) has been activated to set the EUT on specific status.


### 4.1.7 TEST RESULTS

<b>PHASE</b>	Line (L)	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.07	46.09	44.55	46.16	44.62	65.18	55.18	-19.01	-10.55
2	0.17734	0.08	45.32	38.76	45.40	38.84	64.61	54.61	-19.21	-15.77
3	0.25938	0.10	39.08	19.21	39.18	19.31	61.45	51.45	-22.27	-32.14
4	0.51254	0.15	37.70	27.70	37.85	27.85	56.00	46.00	-18.15	-18.15
5	0.65781	0.16	34.16	21.76	34.32	21.92	56.00	46.00	-21.68	-24.08
6	0.88438	0.17	34.14	21.15	34.31	21.32	56.00	46.00	-21.69	-24.68

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

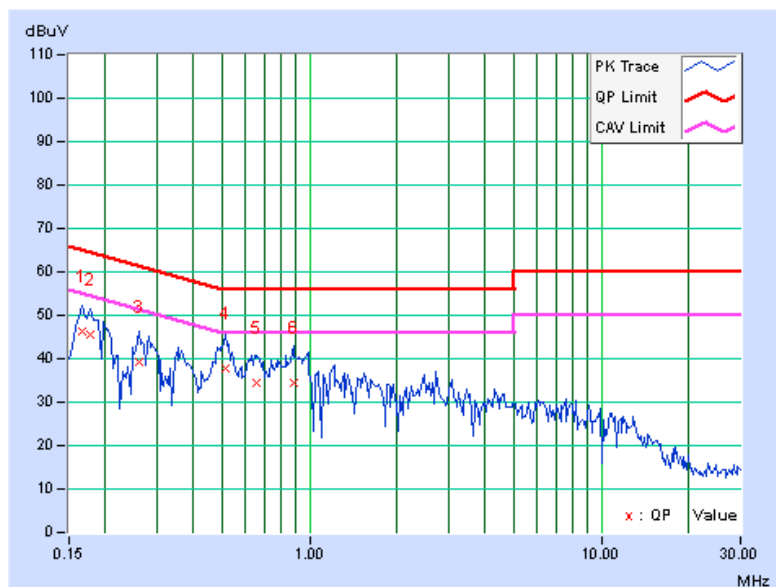


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17635	0.07	43.93	35.87	44.00	35.94	64.66	54.66	-20.66	-18.72
2	0.28281	0.10	38.56	25.94	38.66	26.04	60.73	50.73	-22.07	-24.69
3	0.51030	0.15	38.23	32.22	38.38	32.37	56.00	46.00	-17.62	-13.63
4	0.64609	0.16	35.17	25.99	35.33	26.15	56.00	46.00	-20.67	-19.85
5	0.96250	0.18	36.77	23.74	36.95	23.92	56.00	46.00	-19.05	-22.08
6	1.16797	0.19	33.22	22.75	33.41	22.94	56.00	46.00	-22.59	-23.06

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

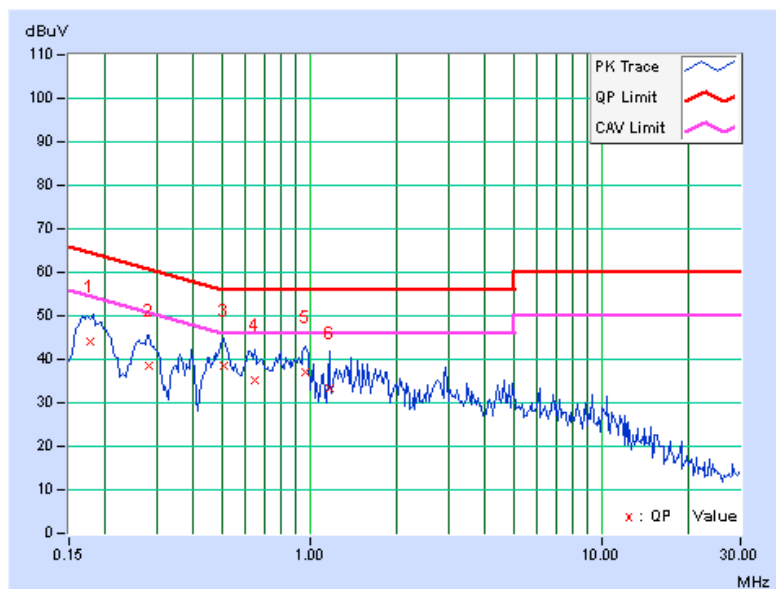

## 4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.



A D T

#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 21, 2014	Jan. 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISi	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKka-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Mar. 05 to 28, 2014

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.5 TEST SETUP

##### <Frequency Range below 1GHz>

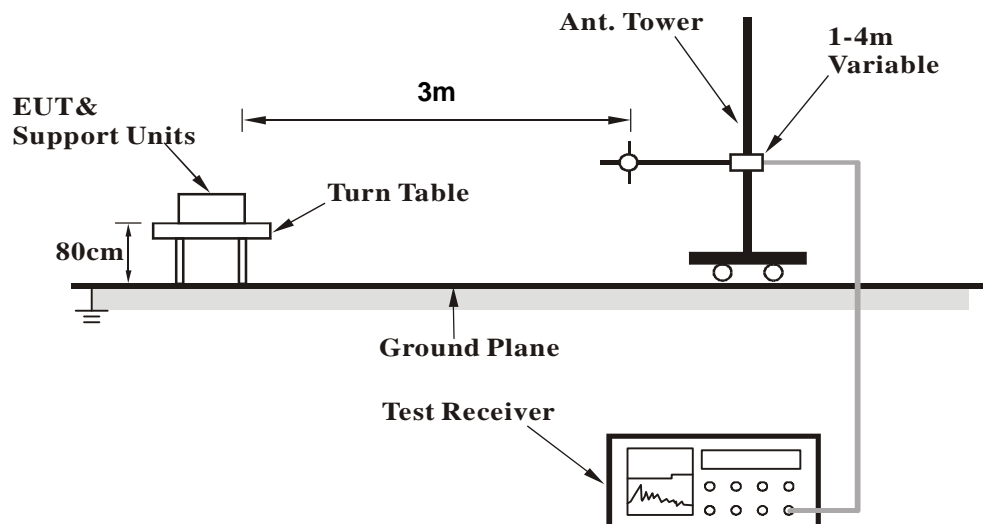

##### <Frequency Range above 1GHz>

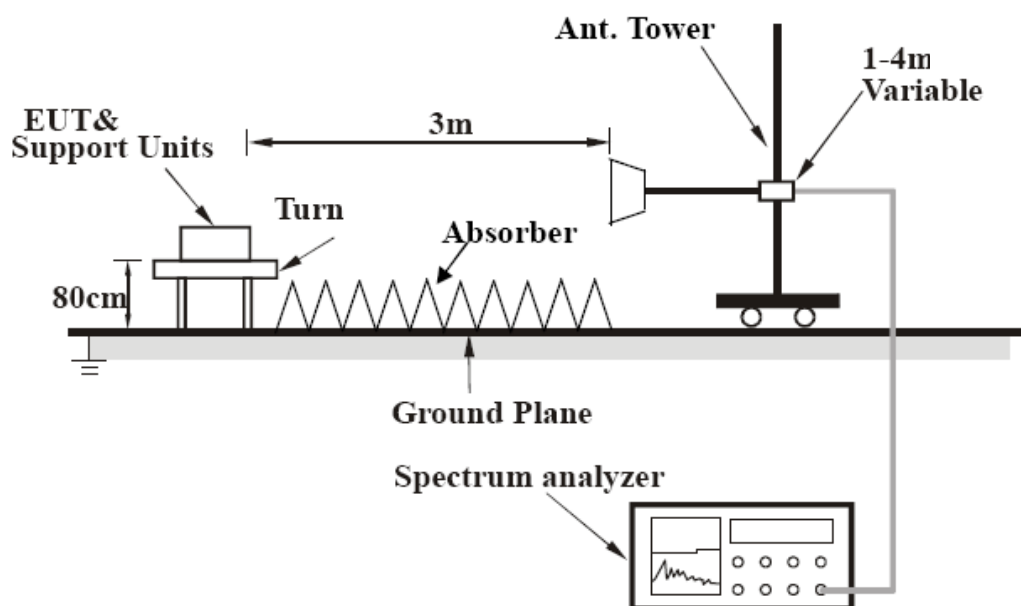

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



## 4.2.7 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA

#### 802.11g

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	80.11	24.6 QP	40.0	-15.5	1.25 H	100	42.54	-17.99
2	121.10	24.2 QP	43.5	-19.3	1.76 H	201	39.57	-15.36
3	139.20	21.4 QP	43.5	-22.1	1.74 H	124	35.36	-13.94
4	206.01	26.3 QP	43.5	-17.3	2.00 H	148	42.63	-16.38
5	212.45	26.1 QP	43.5	-17.4	1.65 H	301	42.42	-16.32
6	401.10	31.1 QP	46.0	-14.9	1.74 H	65	41.02	-9.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.34	29.3 QP	40.0	-10.7	1.00 V	8	43.71	-14.43
2	50.22	28.4 QP	40.0	-11.6	1.00 V	125	42.09	-13.68
3	76.37	32.9 QP	40.0	-7.1	2.00 V	1	50.42	-17.53
4	94.02	30.4 QP	43.5	-13.1	1.50 V	271	49.16	-18.78
5	117.98	33.4 QP	43.5	-10.1	1.00 V	115	48.68	-15.31
6	206.06	29.8 QP	43.5	-13.7	1.00 V	329	46.18	-16.38

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2311.12	60.3 PK	74.0	-13.7	1.10 H	218	62.37	-2.07
2	2311.12	49.5 AV	54.0	-4.5	1.10 H	218	51.57	-2.07
3	*2412.00	109.1 PK			1.03 H	208	110.70	-1.60
4	*2412.00	106.5 AV			1.03 H	208	108.10	-1.60
5	4824.00	57.2 PK	74.0	-16.8	1.62 H	133	50.00	7.20
6	4824.00	53.9 AV	54.0	-0.1	1.62 H	133	46.70	7.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2324.70	50.7 PK	74.0	-23.3	1.47 V	220	52.70	-2.00
2	2324.70	38.7 AV	54.0	-15.3	1.47 V	220	40.70	-2.00
3	*2412.00	103.4 PK			1.47 V	220	105.00	-1.60
4	*2412.00	99.7 AV			1.47 V	220	101.30	-1.60
5	4824.00	54.5 PK	74.0	-19.5	1.12 V	180	47.30	7.20
6	4824.00	50.3 AV	54.0	-3.7	1.12 V	180	43.10	7.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2348.00	60.1 PK	74.0	-13.9	1.08 H	215	62.01	-1.91
2	2348.00	49.9 AV	54.0	-4.1	1.08 H	215	51.81	-1.91
3	*2437.00	109.4 PK			1.04 H	209	110.89	-1.49
4	*2437.00	106.9 AV			1.04 H	209	108.39	-1.49
5	4874.00	56.8 PK	74.0	-17.2	1.59 H	152	49.47	7.33
6	4874.00	53.8 AV	54.0	-0.2	1.59 H	152	46.47	7.33
7	7311.00	53.3 PK	74.0	-20.7	1.47 H	258	38.34	14.96
8	7311.00	39.7 AV	54.0	-14.3	1.47 H	258	24.74	14.96

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2348.00	49.9 PK	74.0	-24.1	1.18 V	266	51.81	-1.91
2	2348.00	36.5 AV	54.0	-17.5	1.18 V	266	38.41	-1.91
3	*2437.00	103.9 PK			1.18 V	266	105.39	-1.49
4	*2437.00	100.2 AV			1.18 V	266	101.69	-1.49
5	4874.00	55.9 PK	74.0	-18.1	1.22 V	182	48.57	7.33
6	4874.00	52.4 AV	54.0	-1.6	1.22 V	182	45.07	7.33
7	7311.00	52.2 PK	74.0	-21.8	1.01 V	155	37.24	14.96
8	7311.00	38.9 AV	54.0	-15.1	1.01 V	155	23.94	14.96

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.3 PK			1.00 H	222	112.68	-1.38
2	*2462.00	108.5 AV			1.00 H	222	109.88	-1.38
3	2485.00	62.1 PK	74.0	-11.9	1.00 H	222	63.37	-1.27
4	2485.00	50.3 AV	54.0	-3.7	1.00 H	222	51.57	-1.27
5	4924.00	56.8 PK	74.0	-17.2	1.62 H	149	49.33	7.47
<b>6</b>	<b>4924.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.62 H</b>	<b>149</b>	<b>46.43</b>	<b>7.47</b>
7	7386.00	53.5 PK	74.0	-20.5	1.42 H	264	38.61	14.89
8	7386.00	39.9 AV	54.0	-14.1	1.42 H	264	25.01	14.89

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.5 PK			1.22 V	266	106.88	-1.38
2	*2462.00	102.1 AV			1.22 V	266	103.48	-1.38
3	2485.00	57.2 PK	74.0	-16.8	1.22 V	266	58.47	-1.27
4	2485.00	45.7 AV	54.0	-8.3	1.22 V	266	46.97	-1.27
5	4924.00	56.4 PK	74.0	-17.6	1.18 V	181	48.93	7.47
6	4924.00	52.6 AV	54.0	-1.4	1.18 V	181	45.13	7.47
7	7386.00	52.8 PK	74.0	-21.2	1.00 V	145	37.91	14.89
8	7386.00	39.4 AV	54.0	-14.6	1.00 V	145	24.51	14.89

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.0 PK	74.0	-4.0	1.07 H	39	71.70	-1.70
2	2390.00	53.2 AV	54.0	-0.8	1.07 H	39	54.90	-1.70
3	*2412.00	105.4 PK			1.07 H	39	107.00	-1.60
4	*2412.00	95.9 AV			1.07 H	39	97.50	-1.60
5	4824.00	48.3 PK	74.0	-25.7	1.00 H	125	41.10	7.20
6	4824.00	35.1 AV	54.0	-18.9	1.00 H	125	27.90	7.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.00 V	17	60.10	-1.70
2	2390.00	44.2 AV	54.0	-9.8	1.00 V	17	45.90	-1.70
3	*2412.00	99.0 PK			1.00 V	17	100.60	-1.60
4	*2412.00	88.0 AV			1.00 V	17	89.60	-1.60
5	4824.00	47.7 PK	74.0	-26.3	1.27 V	284	40.50	7.20
6	4824.00	35.4 AV	54.0	-18.6	1.27 V	284	28.20	7.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.4 PK	74.0	-5.6	1.06 H	39	70.10	-1.70
2	2390.00	49.8 AV	54.0	-4.2	1.06 H	39	51.50	-1.70
3	*2437.00	111.7 PK			1.06 H	39	113.19	-1.49
4	*2437.00	102.8 AV			1.06 H	39	104.29	-1.49
5	2483.50	72.4 PK	74.0	-1.6	1.06 H	39	73.68	-1.28
6	2483.50	52.1 AV	54.0	-1.9	1.06 H	39	53.38	-1.28
7	4874.00	54.7 PK	74.0	-19.3	1.01 H	354	47.37	7.33
8	4874.00	43.0 AV	54.0	-11.0	1.01 H	354	35.67	7.33
9	7311.00	52.1 PK	74.0	-21.9	1.10 H	245	37.14	14.96
10	7311.00	39.0 AV	54.0	-15.0	1.10 H	245	24.04	14.96

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.2 PK	74.0	-19.8	1.17 V	13	55.90	-1.70
2	2390.00	40.2 AV	54.0	-13.8	1.17 V	13	41.90	-1.70
3	*2437.00	105.2 PK			1.17 V	13	106.69	-1.49
4	*2437.00	94.7 AV			1.17 V	13	96.19	-1.49
5	2483.50	60.8 PK	74.0	-13.2	1.17 V	13	62.08	-1.28
6	2483.50	39.7 AV	54.0	-14.3	1.17 V	13	40.98	-1.28
7	4874.00	56.7 PK	74.0	-17.3	1.25 V	230	49.37	7.33
8	4874.00	44.6 AV	54.0	-9.4	1.25 V	230	37.27	7.33
9	7311.00	51.0 PK	74.0	-23.0	1.45 V	187	36.04	14.96
10	7311.00	40.0 AV	54.0	-14.0	1.45 V	187	25.04	14.96

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2369.00	69.0 PK	74.0	-5.0	1.05 H	55	70.79	-1.79
2	2369.00	50.2 AV	54.0	-3.8	1.05 H	55	51.99	-1.79
3	*2462.00	105.9 PK			1.05 H	39	107.28	-1.38
4	*2462.00	95.8 AV			1.05 H	39	97.18	-1.38
5	2483.50	68.4 PK	74.0	-5.6	1.05 H	39	69.68	-1.28
6	2483.50	53.2 AV	54.0	-0.8	1.05 H	39	54.48	-1.28
7	4924.00	48.1 PK	74.0	-25.9	1.04 H	112	40.63	7.47
8	4924.00	34.7 AV	54.0	-19.3	1.04 H	112	27.23	7.47
9	7386.00	52.6 PK	74.0	-21.4	1.09 H	253	37.71	14.89
10	7386.00	39.4 AV	54.0	-14.6	1.09 H	253	24.51	14.89

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2369.00	54.4 PK	74.0	-19.6	1.11 V	21	56.19	-1.79
2	2369.00	40.4 AV	54.0	-13.6	1.11 V	21	42.19	-1.79
3	*2462.00	99.1 PK			1.00 V	16	100.48	-1.38
4	*2462.00	88.2 AV			1.00 V	16	89.58	-1.38
5	2483.50	60.3 PK	74.0	-13.7	1.13 V	28	61.58	-1.28
6	2483.50	39.3 AV	54.0	-14.7	1.13 V	28	40.58	-1.28
7	4924.00	47.4 PK	74.0	-26.6	1.33 V	269	39.93	7.47
8	4924.00	35.1 AV	54.0	-18.9	1.33 V	269	27.63	7.47
9	7386.00	50.9 PK	74.0	-23.1	1.39 V	173	36.01	14.89
10	7386.00	39.8 AV	54.0	-14.2	1.39 V	173	24.91	14.89

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

802.11n (HT20)

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	1.04 H	41	70.40	-1.70
2	2390.00	53.0 AV	54.0	-1.0	1.04 H	41	54.70	-1.70
3	*2412.00	104.0 PK			1.04 H	41	105.60	-1.60
4	*2412.00	95.3 AV			1.04 H	41	96.90	-1.60
5	4824.00	48.3 PK	74.0	-25.7	1.00 H	113	41.10	7.20
6	4824.00	35.2 AV	54.0	-18.8	1.00 H	113	28.00	7.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	1.00 V	14	59.60	-1.70
2	2390.00	43.7 AV	54.0	-10.3	1.00 V	14	45.40	-1.70
3	*2412.00	99.4 PK			1.02 V	7	101.00	-1.60
4	*2412.00	88.2 AV			1.02 V	7	89.80	-1.60
5	4824.00	47.1 PK	74.0	-26.9	1.29 V	293	39.90	7.20
6	4824.00	35.0 AV	54.0	-19.0	1.29 V	293	27.80	7.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.





A D T

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.06 H	38	70.00	-1.70
2	2390.00	49.6 AV	54.0	-4.4	1.06 H	38	51.30	-1.70
3	*2437.00	111.3 PK			1.06 H	38	112.79	-1.49
4	*2437.00	102.4 AV			1.06 H	38	103.89	-1.49
5	2483.50	72.6 PK	74.0	-1.4	1.06 H	38	73.88	-1.28
6	2483.50	52.2 AV	54.0	-1.8	1.06 H	38	53.48	-1.28
7	4874.00	54.3 PK	74.0	-19.7	1.02 H	360	46.97	7.33
8	4874.00	42.5 AV	54.0	-11.5	1.02 H	360	35.17	7.33
9	7311.00	51.8 PK	74.0	-22.2	1.09 H	246	36.84	14.96
10	7311.00	38.9 AV	54.0	-15.1	1.09 H	246	23.94	14.96

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.0 PK	74.0	-20.0	1.14 V	20	55.70	-1.70
2	2390.00	40.2 AV	54.0	-13.8	1.14 V	20	41.90	-1.70
3	*2437.00	105.7 PK			1.22 V	12	107.19	-1.49
4	*2437.00	95.0 AV			1.22 V	12	96.49	-1.49
5	2483.50	60.1 PK	74.0	-13.9	1.14 V	25	61.38	-1.28
6	2483.50	39.2 AV	54.0	-14.8	1.14 V	25	40.48	-1.28
7	4874.00	56.6 PK	74.0	-17.4	1.21 V	225	49.27	7.33
8	4874.00	44.2 AV	54.0	-9.8	1.21 V	225	36.87	7.33
9	7311.00	50.6 PK	74.0	-23.4	1.47 V	176	35.64	14.96
10	7311.00	39.6 AV	54.0	-14.4	1.47 V	176	24.64	14.96

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.7 PK			1.05 H	38	105.08	-1.38
2	*2462.00	94.5 AV			1.05 H	38	95.88	-1.38
3	2483.50	69.4 PK	74.0	-4.6	1.05 H	38	70.68	-1.28
4	2483.50	53.2 AV	54.0	-0.8	1.05 H	38	54.48	-1.28
5	4924.00	47.6 PK	74.0	-26.4	1.02 H	102	40.13	7.47
6	4924.00	34.4 AV	54.0	-19.6	1.02 H	102	26.93	7.47
7	7386.00	53.1 PK	74.0	-20.9	1.05 H	253	38.21	14.89
8	7386.00	39.7 AV	54.0	-14.3	1.05 H	253	24.81	14.89

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.7 PK			1.00 V	13	100.08	-1.38
2	*2462.00	88.1 AV			1.00 V	13	89.48	-1.38
3	2483.50	60.1 PK	74.0	-13.9	1.19 V	29	61.38	-1.28
4	2483.50	39.1 AV	54.0	-14.9	1.19 V	29	40.38	-1.28
5	4924.00	47.1 PK	74.0	-26.9	1.31 V	255	39.63	7.47
6	4924.00	35.0 AV	54.0	-19.0	1.31 V	255	27.53	7.47
7	7386.00	50.9 PK	74.0	-23.1	1.40 V	163	36.01	14.89
8	7386.00	39.6 AV	54.0	-14.4	1.40 V	163	24.71	14.89

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

802.11n (HT40)

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.06 H	21	68.10	-1.70
2	2390.00	53.2 AV	54.0	-0.8	1.06 H	21	54.90	-1.70
3	*2422.00	98.9 PK			1.06 H	21	100.45	-1.55
4	*2422.00	90.0 AV			1.06 H	21	91.55	-1.55
5	4844.00	47.2 PK	74.0	-26.8	1.00 H	98	39.96	7.24
6	4844.00	34.1 AV	54.0	-19.9	1.00 H	98	26.86	7.24
7	7266.00	52.8 PK	74.0	-21.2	1.04 H	240	37.78	15.02
8	7266.00	39.7 AV	54.0	-14.3	1.04 H	240	24.68	15.02

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.3 PK	74.0	-19.7	1.20 V	14	56.00	-1.70
2	2390.00	41.7 AV	54.0	-12.3	1.20 V	14	43.40	-1.70
3	*2422.00	94.7 PK			1.20 V	14	96.25	-1.55
4	*2422.00	83.4 AV			1.20 V	14	84.95	-1.55
5	4844.00	46.9 PK	74.0	-27.1	1.29 V	263	39.66	7.24
6	4844.00	35.1 AV	54.0	-18.9	1.29 V	263	27.86	7.24
7	7266.00	51.0 PK	74.0	-23.0	1.35 V	153	35.98	15.02
8	7266.00	40.0 AV	54.0	-14.0	1.35 V	153	24.98	15.02

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.03 H	40	67.90	-1.70
2	2390.00	51.6 AV	54.0	-2.4	1.03 H	40	53.30	-1.70
3	*2437.00	104.5 PK			1.03 H	40	105.99	-1.49
4	*2437.00	94.6 AV			1.03 H	40	96.09	-1.49
5	2483.50	68.2 PK	74.0	-5.8	1.03 H	40	69.48	-1.28
6	2483.50	53.6 AV	54.0	-0.4	1.03 H	40	54.88	-1.28
7	4874.00	47.0 PK	74.0	-27.0	1.00 H	100	39.67	7.33
8	4874.00	34.0 AV	54.0	-20.0	1.00 H	100	26.67	7.33
9	7311.00	52.7 PK	74.0	-21.3	1.00 H	226	37.74	14.96
10	7311.00	39.5 AV	54.0	-14.5	1.00 H	226	24.54	14.96

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.3 PK	74.0	-19.7	1.19 V	11	56.00	-1.70
2	2390.00	40.5 AV	54.0	-13.5	1.19 V	11	42.20	-1.70
3	*2437.00	97.6 PK			1.25 V	15	99.09	-1.49
4	*2437.00	87.5 AV			1.25 V	15	88.99	-1.49
5	2483.50	60.2 PK	74.0	-13.8	1.12 V	33	61.48	-1.28
6	2483.50	39.4 AV	54.0	-14.6	1.12 V	33	40.68	-1.28
7	4874.00	57.3 PK	74.0	-16.7	1.26 V	220	49.97	7.33
8	4874.00	44.6 AV	54.0	-9.4	1.26 V	220	37.27	7.33
9	7311.00	50.5 PK	74.0	-23.5	1.44 V	168	35.54	14.96
10	7311.00	39.5 AV	54.0	-14.5	1.44 V	168	24.54	14.96

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.3 PK			1.04 H	41	101.72	-1.42
2	*2452.00	91.1 AV			1.04 H	41	92.52	-1.42
3	2483.50	66.7 PK	74.0	-7.3	1.04 H	41	67.98	-1.28
4	2483.50	53.4 AV	54.0	-0.6	1.04 H	41	54.68	-1.28
5	4904.00	46.8 PK	74.0	-27.2	1.00 H	89	39.39	7.41
6	4904.00	33.9 AV	54.0	-20.1	1.00 H	89	26.49	7.41
7	7356.00	52.9 PK	74.0	-21.1	1.06 H	223	37.99	14.91
8	7356.00	39.6 AV	54.0	-14.4	1.06 H	223	24.69	14.91

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	93.1 PK			1.15 V	16	94.52	-1.42
2	*2452.00	82.9 AV			1.15 V	16	84.32	-1.42
3	2483.50	54.4 PK	74.0	-19.6	1.17 V	13	55.68	-1.28
4	2483.50	42.1 AV	54.0	-11.9	1.17 V	13	43.38	-1.28
5	4904.00	46.9 PK	74.0	-27.1	1.26 V	257	39.49	7.41
6	4904.00	34.8 AV	54.0	-19.2	1.26 V	257	27.39	7.41
7	7356.00	51.4 PK	74.0	-22.6	1.36 V	155	36.49	14.91
8	7356.00	40.2 AV	54.0	-13.8	1.36 V	155	25.29	14.91

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 20, 2014


#### 4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP

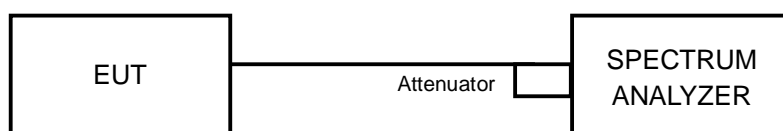

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

### 4.3.7 TEST RESULTS

#### 802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	7.56	0.5	PASS
6	2437	7.13	0.5	PASS
11	2462	7.59	0.5	PASS

#### 802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.38	0.5	PASS
6	2437	16.35	0.5	PASS
11	2462	16.39	0.5	PASS

#### 802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.37	0.5	PASS
6	2437	17.57	0.5	PASS
11	2462	17.61	0.5	PASS

#### 802.11n (HT40)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	35.15	0.5	PASS
6	2437	35.15	0.5	PASS
9	2452	35.19	0.5	PASS




A D T

### SPECTRUM PLOT OF WORST VALUE


#### 802.11b / CH6

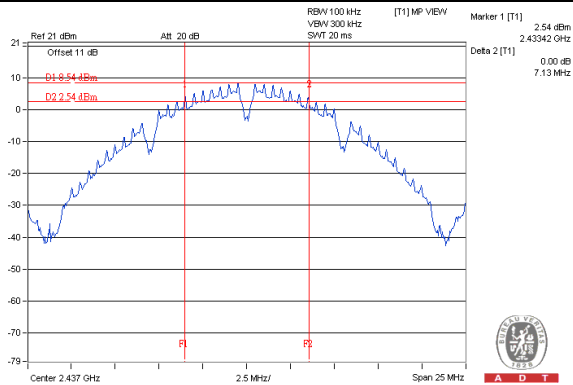


#### 802.11g / CH6

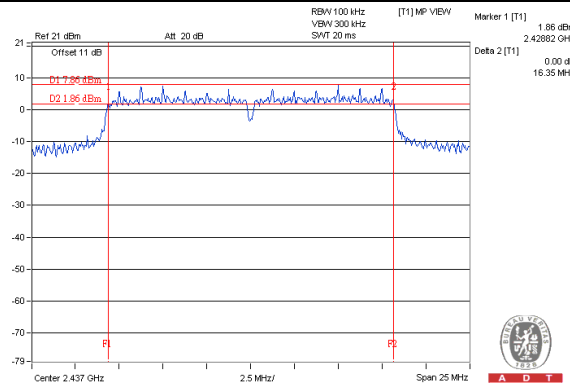

#### 802.11n (HT20) / CH1

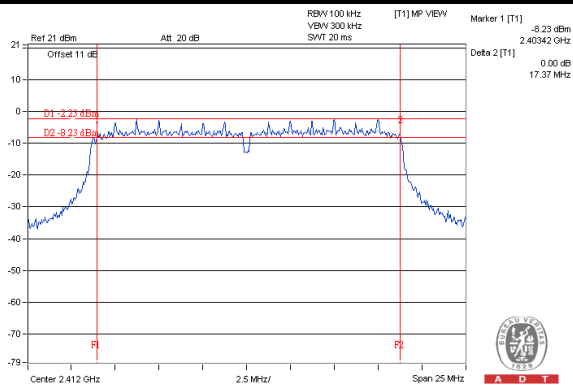

#### 802.11n (HT40) / CH6

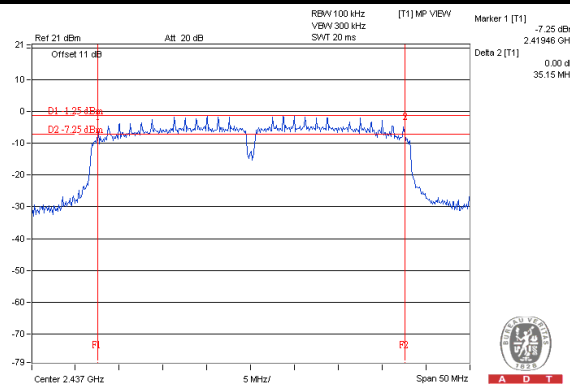



## 4.4 CONDUCTED OUTPUT POWER

### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	1014008	Apr. 23, 2013	Apr. 22, 2014
Power Sensor	MA2411B	0917122	Apr. 23, 2013	Apr. 22, 2014

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 20, 2014


### 4.4.3 TEST PROCEDURES

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor.  
Record the peak power level.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.5 TEST SETUP

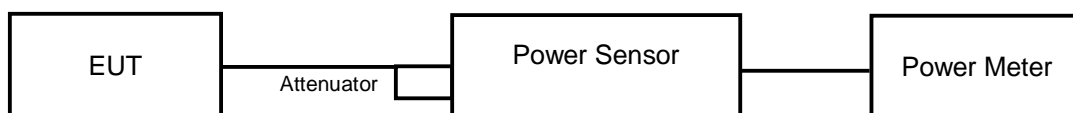

### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

#### 4.4.7 TEST RESULTS

##### FOR PEAK POWER

##### 802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	56.364	17.51	30	PASS
6	2437	74.302	18.71	30	PASS
11	2462	113.763	20.56	30	PASS

##### 802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	60.954	17.85	30	PASS
6	2437	161.808	22.09	30	PASS
11	2462	53.456	17.28	30	PASS

##### 802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	46.026	16.63	30	PASS
6	2437	161.065	22.07	30	PASS
11	2462	45.186	16.55	30	PASS

##### 802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
3	2422	38.994	15.91	30	PASS
6	2437	83.946	19.24	30	PASS
9	2452	39.264	15.94	30	PASS



A D T

**FOR AVERAGE POWER**

**802.11b**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	31.696	15.01
6	2437	42.170	16.25
11	2462	66.988	18.26

**802.11g**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	10.965	10.40
6	2437	62.230	17.94
11	2462	8.933	9.51

**802.11n (HT20)**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	7.925	8.99
6	2437	62.951	17.99
11	2462	7.345	8.66

**802.11n (HT40)**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
3	2422	6.486	8.12
6	2437	18.030	12.56
9	2452	6.383	8.05

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 20, 2014


### 4.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5.5 TEST SETUP

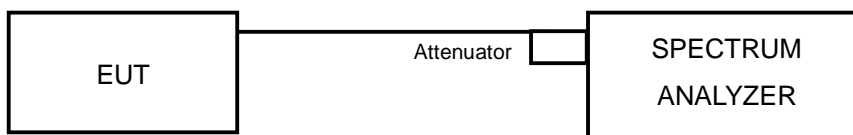

### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

## 4.5.7 TEST RESULTS

### 802.11b

Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
1	2412	-5.96	8	PASS
6	2437	-4.52	8	PASS
11	2462	-3.45	8	PASS

### 802.11g

Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
1	2412	-13.62	8	PASS
6	2437	-6.16	8	PASS
11	2462	-14.15	8	PASS

### 802.11n (HT20)

Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
1	2412	-15.32	8	PASS
6	2437	-6.57	8	PASS
11	2462	-15.83	8	PASS

### 802.11n (HT40)


Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
3	2422	-17.98	8	PASS
6	2437	-13.13	8	PASS
9	2452	-18.19	8	PASS




A D T

### SPECTRUM PLOT OF WORST VALUE


#### 802.11b / CH11

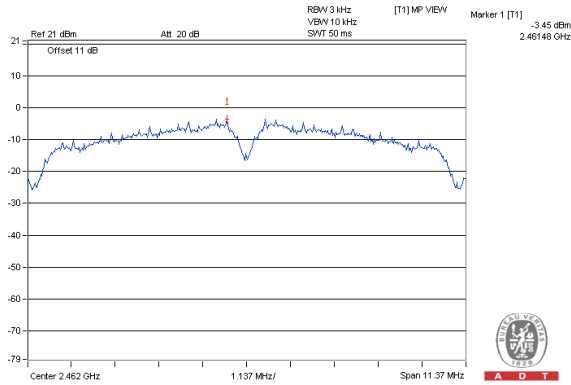


#### 802.11g / CH6

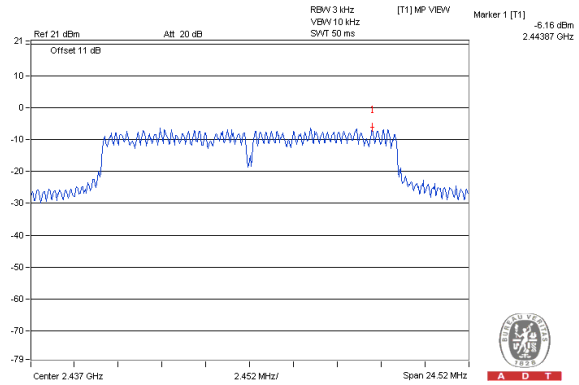

#### 802.11n (HT20) / CH6

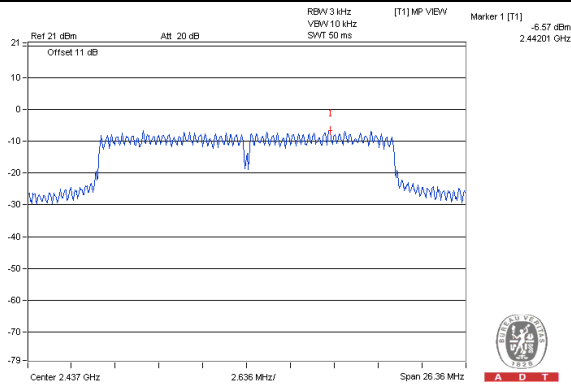

#### 802.11n (HT40) / CH6

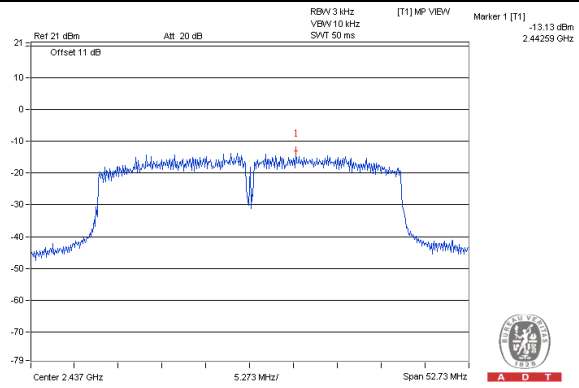

## 4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 20, 2014

### 4.6.3 TEST PROCEDURE

**Measurement Procedure - Reference Level**

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


**Measurement Procedure –Unwanted Emission Level**

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP

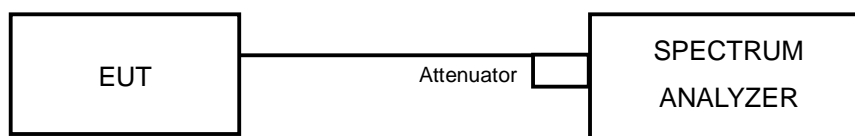

#### 4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

#### 4.6.7 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.









A D T

### 802.11b:



#### CH 1

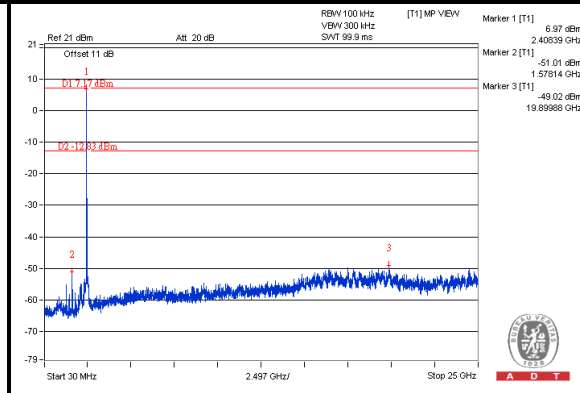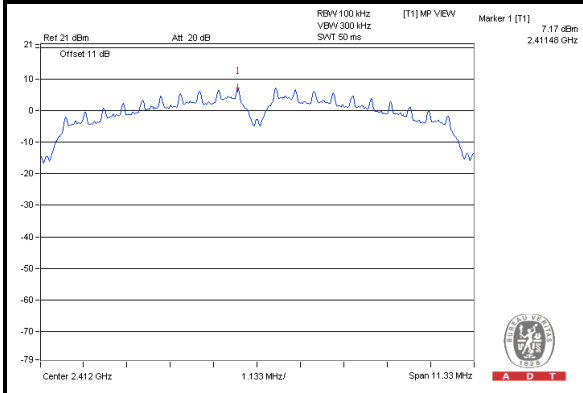


#### CH 6

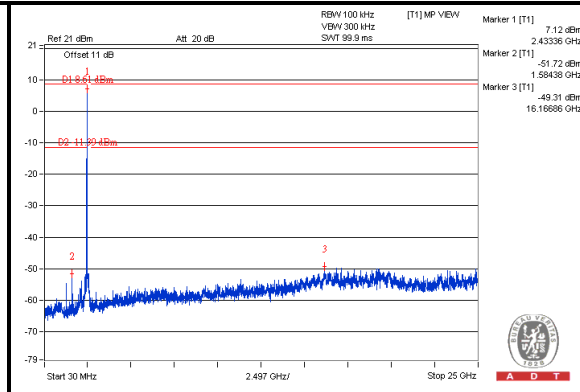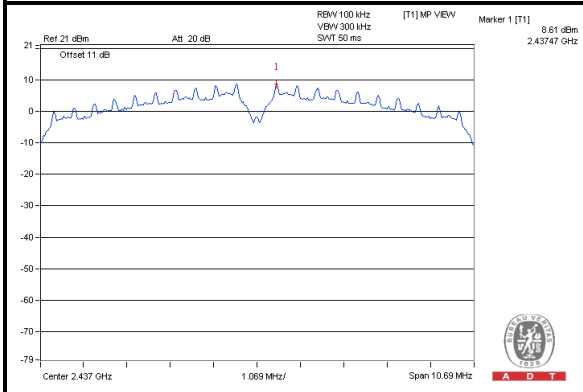


#### CH 11

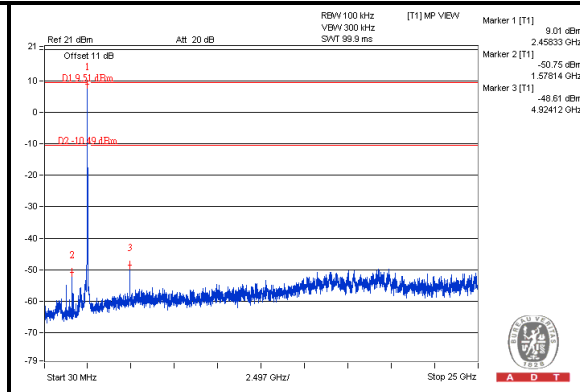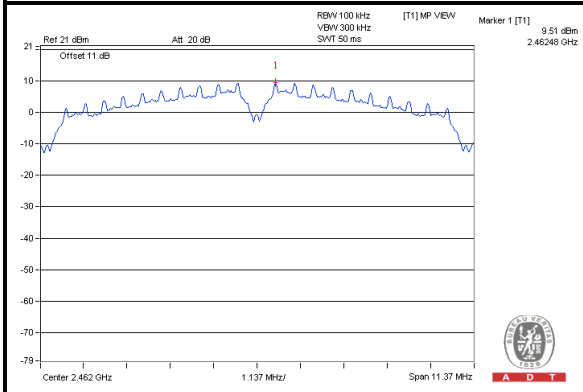

#### CH 1 Band edge

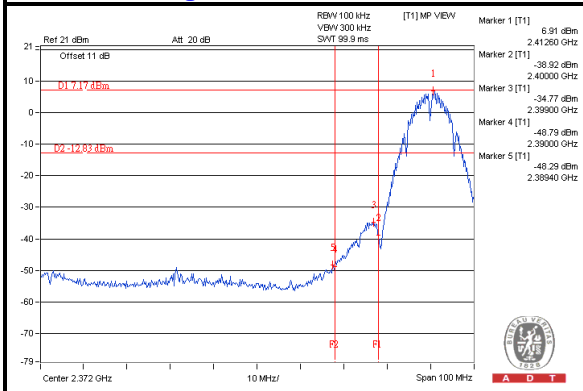

#### CH 11 Band edge

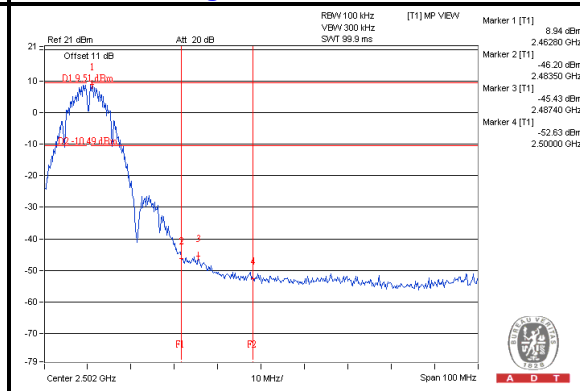





A D T

802.11g:


CH 1

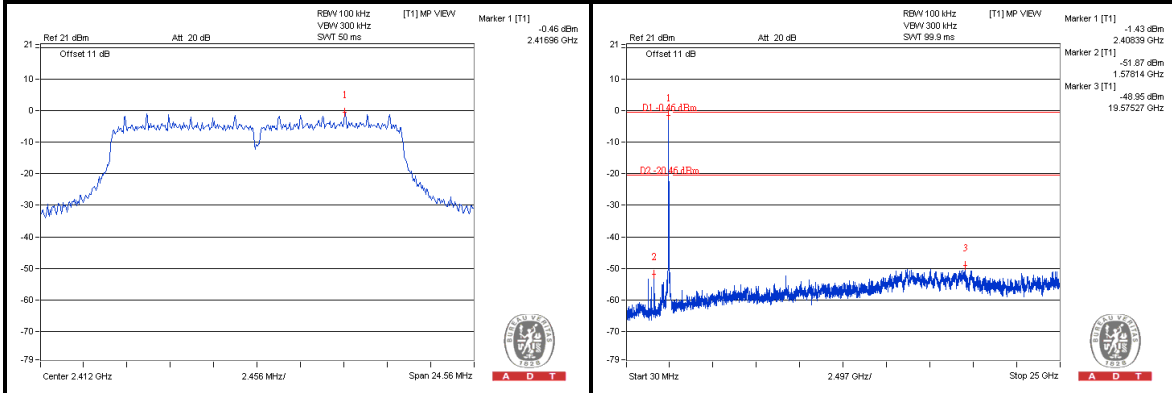


CH 6

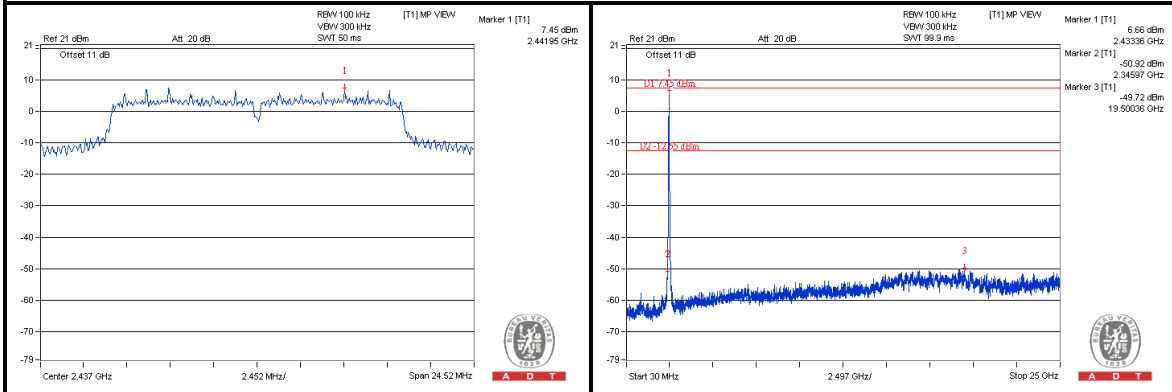


CH 11

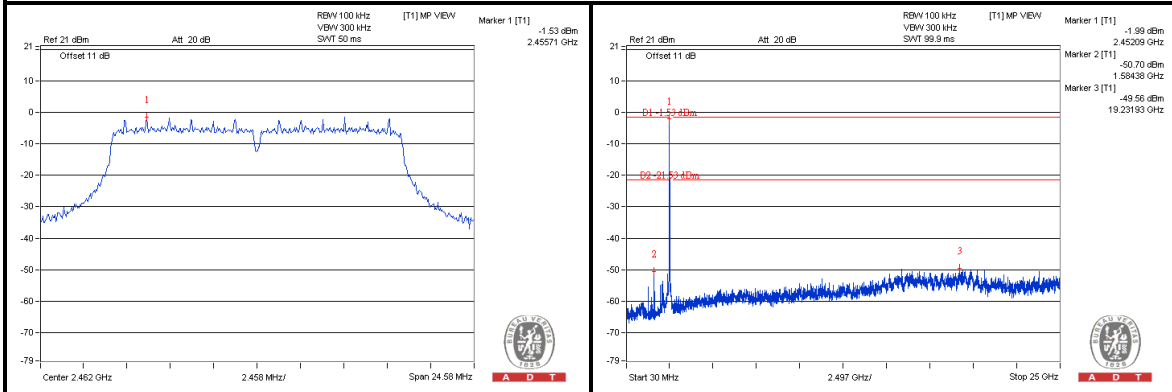

CH 1 Band edge

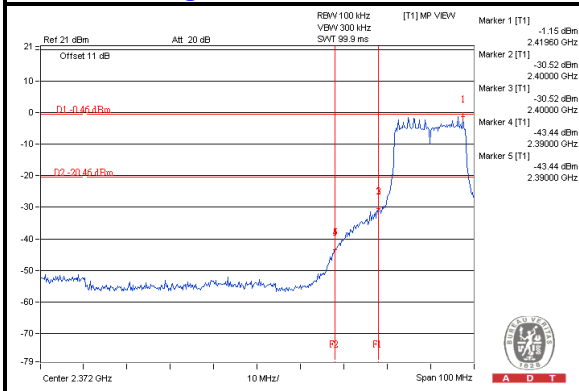

CH 11 Band edge

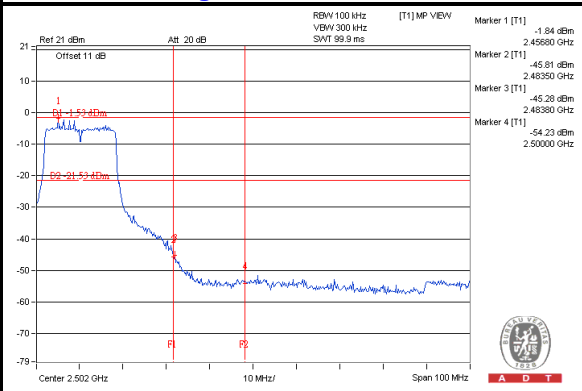





A D T

### 802.11n (HT20):


#### CH 1

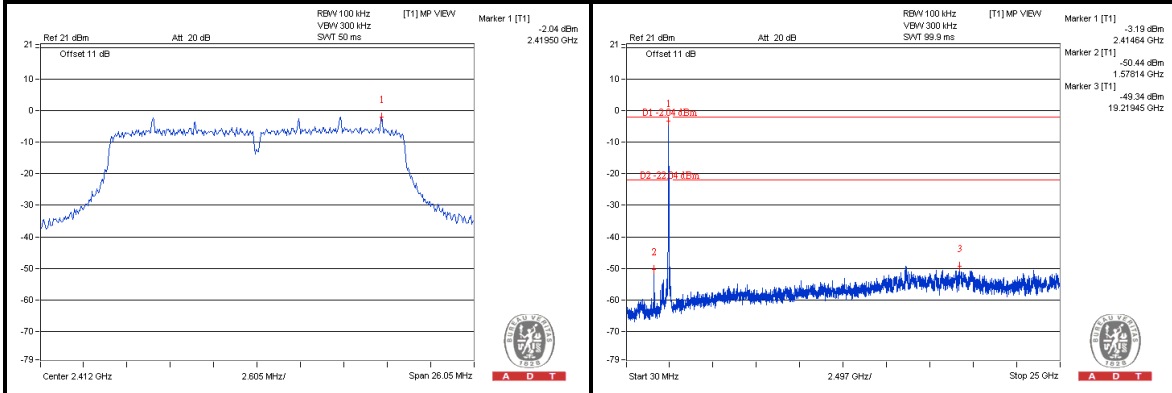


#### CH 6

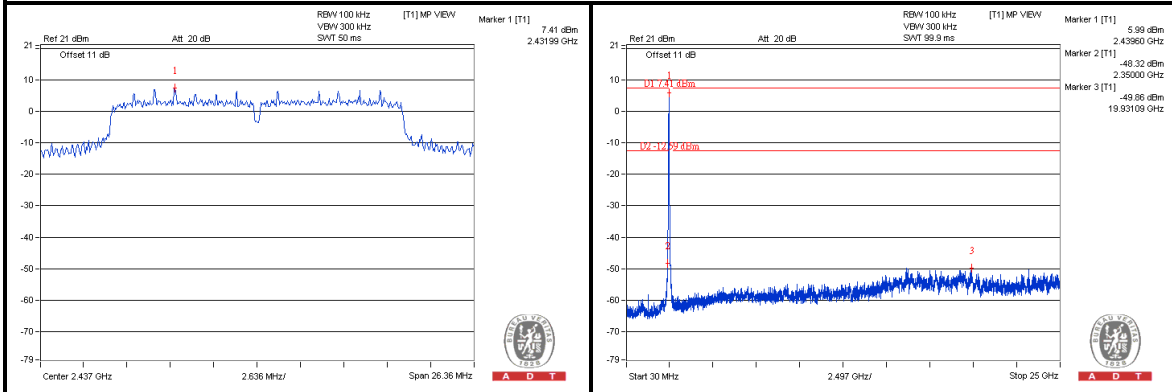


#### CH 11

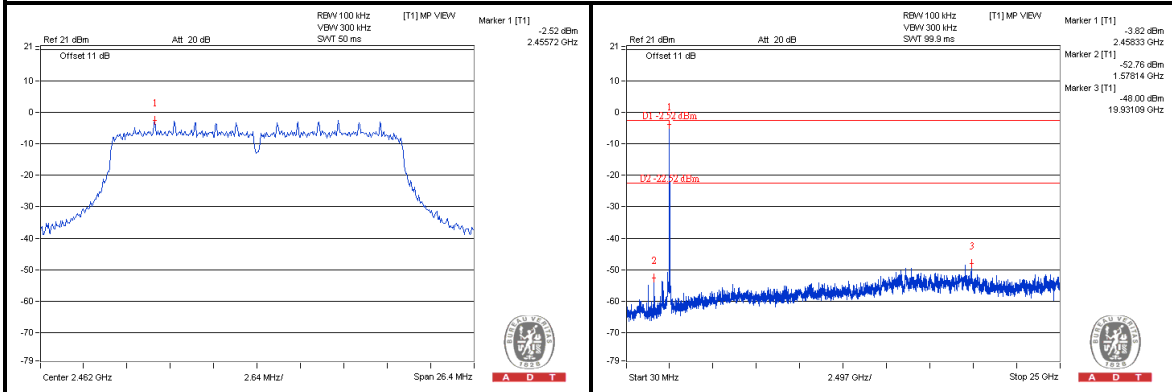

#### CH 1 Band edge

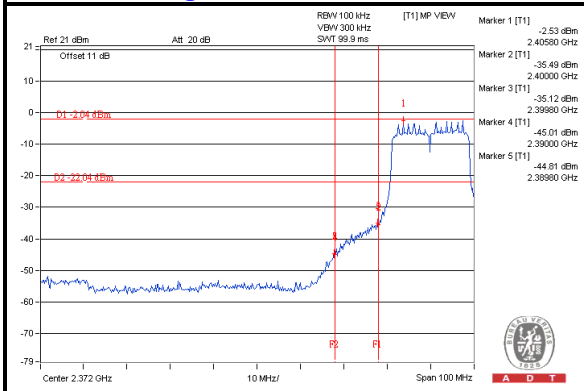

#### CH 11 Band edge

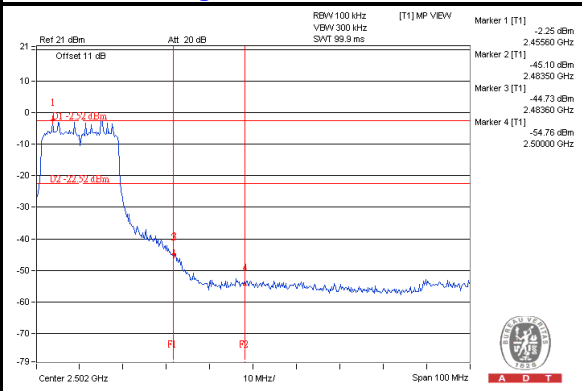





A D T

### 802.11n (HT40):


#### CH 3

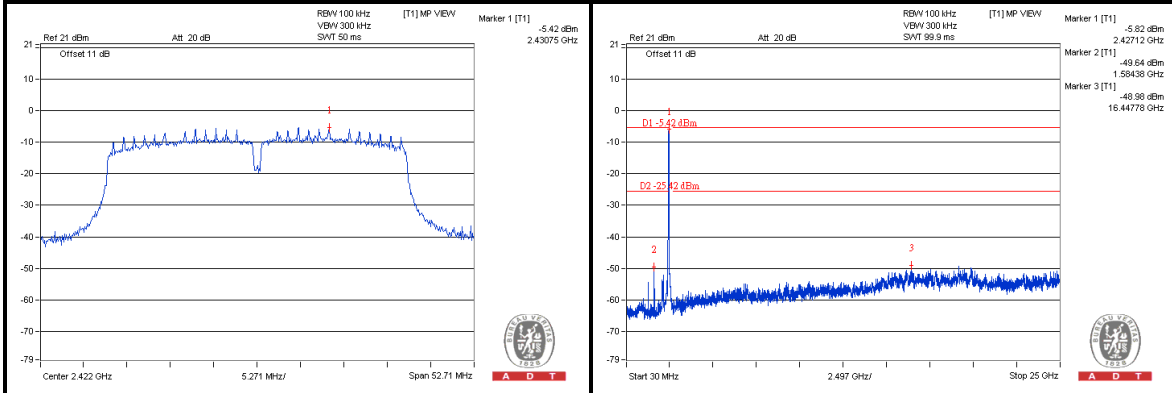


#### CH 6

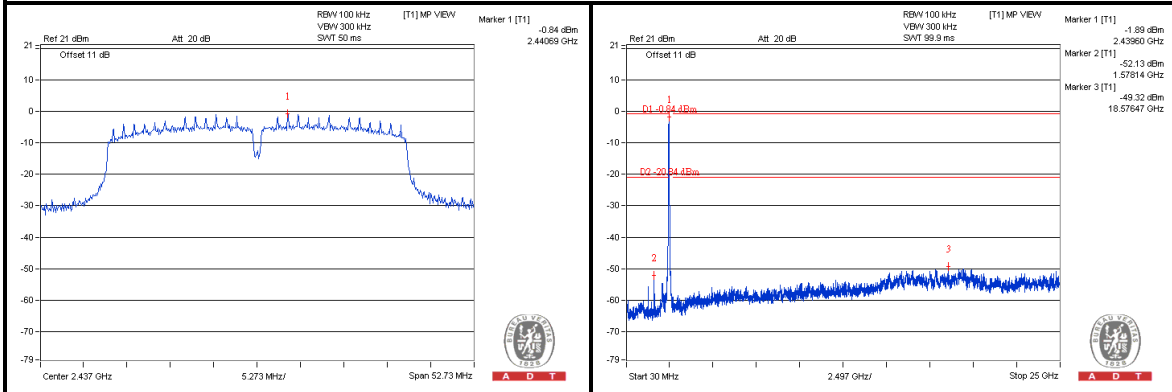


#### CH 9

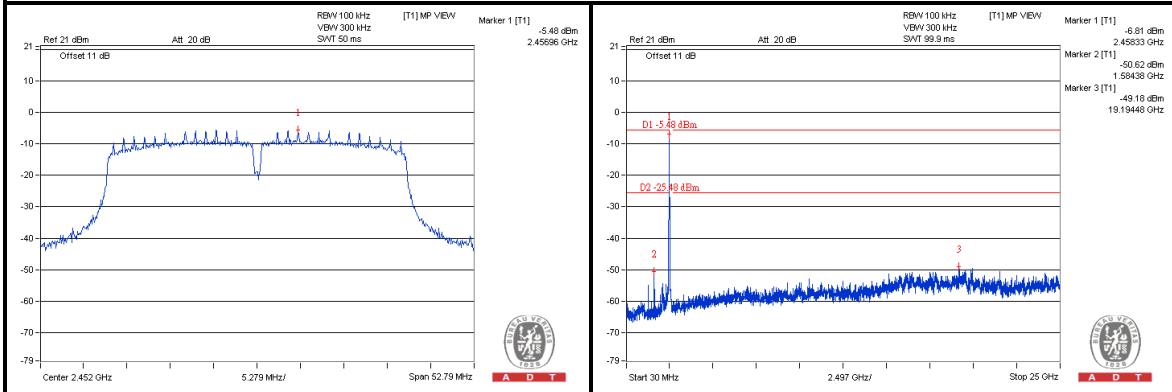

#### CH 3 Band edge

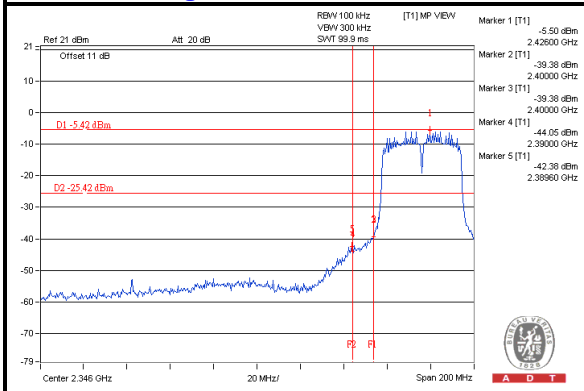

#### CH 9 Band edge

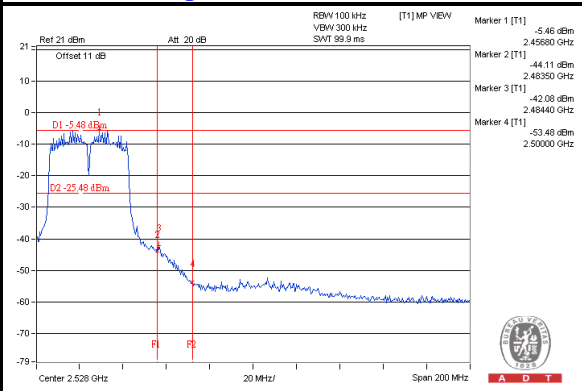

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.



A D T

## **7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**--- END ---**