

# RF TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**Punkt. MP 02 4G Feature phone**

ISSUED TO  
Punkt Tronics AG

Via Losanna 4, Lugano 6900, Switzerland



Tested by:   
Ye Hongji  
Date:   
Oct. 09, 2021

Approved by:   
Liao Jianming  
(Technical Director)  
Date:   
Oct. 09, 2021

Report No.: BL-SZ2181089-603  
EUT Name: Punkt. MP 02 4G Feature phone  
Model Name: MP02A  
Brand Name: Punkt.  
Test Standard: 47 CFR Part 15 Subpart C  
RSS-Gen Issue 5  
RSS-247 Issue 2  
(refer section 3.1)  
FCC ID: Z3PMP02A  
IC Number: 20683-MP02A  
Test Conclusion: Pass  
Test Date: Sep. 02, 2021 ~ Sep. 23, 2021  
Date of Issue: Oct. 09, 2021

*NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.*

### Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Oct. 09, 2021</u>	<u>Initial Issue</u>

## TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	5
1.1	Identification of the Testing Laboratory .....	5
1.2	Identification of the Responsible Testing Location .....	5
1.3	Laboratory Condition .....	5
1.4	Announce .....	5
2	PRODUCT INFORMATION .....	6
2.1	Applicant Information .....	6
2.2	Manufacturer Information .....	6
2.3	Factory Information .....	6
2.4	General Description for Equipment under Test (EUT) .....	6
2.5	Technical Information .....	7
2.6	Additional Instructions .....	9
3	SUMMARY OF TEST RESULTS .....	11
3.1	Test Standards .....	11
3.2	Verdict .....	11
4	GENERAL TEST CONFIGURATIONS .....	12
4.1	Test Environments .....	12
4.2	Test Equipment List .....	12
4.3	Measurement Uncertainty .....	12
4.4	Description of Test Setup .....	13
4.4.1	For Antenna Port Test .....	13
4.4.2	For AC Power Supply Port Test .....	13
4.4.3	For Radiated Test (Below 30 MHz) .....	14
4.4.4	For Radiated Test (30 MHz-1 GHz) .....	14
4.4.5	For Radiated Test (Above 1 GHz) .....	15
4.5	Measurement Results Explanation Example .....	16

4.5.1	For conducted test items: .....	16
4.5.2	For radiated band edges and spurious emission test:.....	16
5	TEST ITEMS.....	17
5.1	Antenna Requirements.....	17
5.1.1	Relevant Standards.....	17
5.1.2	Antenna Anti-Replacement Construction .....	17
5.1.3	Antenna Gain .....	17
5.2	Output Power .....	18
5.2.1	Test Limit.....	18
5.2.2	Test Setup .....	18
5.2.3	Test Procedure .....	18
5.2.4	Test Result .....	19
5.3	6dB Bandwidth .....	20
5.3.1	Limit.....	20
5.3.2	Test Setup .....	20
5.3.3	Test Procedure .....	20
5.3.4	Test Result .....	20
5.4	Conducted Spurious Emission .....	21
5.4.1	Limit.....	21
5.4.2	Test Setup .....	21
5.4.3	Test Procedure .....	21
5.4.4	Test Result .....	22
5.5	Band Edge (Authorized-band band-edge).....	23
5.5.1	Limit.....	23
5.5.2	Test Setup .....	23
5.5.3	Test Procedure .....	23
5.5.4	Test Result .....	24
5.6	Conducted Emission .....	25
5.6.1	Limit.....	25
5.6.2	Test Setup .....	25
5.6.3	Test Procedure .....	25
5.6.4	Test Result .....	25

5.7	Radiated Spurious Emission .....	26
5.7.1	Limit.....	26
5.7.2	Test Setup .....	26
5.7.3	Test Procedure .....	26
5.7.4	Test Result .....	29
5.8	Band Edge (Restricted-band band-edge).....	30
5.8.1	Limit.....	30
5.8.2	Test Setup .....	30
5.8.3	Test Procedure .....	30
5.8.4	Test Result .....	30
5.9	Power Spectral density (PSD).....	31
5.9.1	Limit.....	31
5.9.2	Test Setup .....	31
5.9.3	Test Procedure .....	31
5.9.4	Test Result .....	31
ANNEX A	TEST RESULT .....	32
A.1	Output Power .....	32
A.2	Bandwidth.....	36
A.3	Conducted Spurious Emissions .....	45
A.4	Band Edge (Authorized-band band-edge).....	60
A.5	Conducted Emissions.....	67
A.6	Radiated Emission .....	69
A.7	Band Edge (Restricted-band band-edge).....	92
A.8	Power Spectral Density (PSD) .....	110
ANNEX B	TEST SETUP PHOTOS .....	115
ANNEX C	EUT EXTERNAL PHOTOS .....	115
ANNEX D	EUT INTERNAL PHOTOS .....	115

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v6.4.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Punkt Tronics AG
Address	Via Losanna 4, Lugano 6900, Switzerland

### 2.2 Manufacturer Information

Manufacturer	Shenzhen Unicair Communication Technology Co., Ltd.
Address	8-9/F, Block1, Wutong Island, Shunchang Rd., Xixiang, Bao'an District, Shenzhen China.

### 2.3 Factory Information

Factory	Dongguan Unicair Communication Tech Co., Ltd
Address	No.49 Yinhu Road, Yinhu Industrial Zone, Qiaotou Town, Dongguan City, Guangdong Province, China

### 2.4 General Description for Equipment under Test (EUT)

EUT Type	Punkt. MP 02 4G Feature phone
Model Name Under Test	MP02A
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	N/A
Hardware Version	MP02_Main_Rev.B
Software Version	03.00.0301
Dimensions (Approx.)	117*51.3*14.3 mm
Weight (Approx.)	100g (with battery)

## 2.5 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA/DC-HSDPA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7/12/17 Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) GPS, GLONASS, BDS
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$ , where - $f_c$ = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$ , where - $f_c$ = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.
Modulation Type	DSSS, OFDM
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Antenna System (eg., MIMO, Smart Antenna)	N/A
Categorization as Correlated or Completely Uncorrelated	N/A
Antenna Type	PIFA Antenna
Antenna Gain	2.2 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
About the Product	Only the WIFI 802.11b, 802.11g and 802.11n (HT20/40) was tested in this report.

Modulation technology	Modulation Type	Transfer Rate (Mbps)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
6dB Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 and 2.6 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



## 2.6 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	QRCT3		
Support Units (Software installation media)	Description	Manufacturer	Model
		Notebook	N/A
Mode	Channel	Soft Set	
802.11 b	1	9.0	
	2	9.5	
	3	12.0	
	4	15.0	
	6	15.0	
	11	15.0	
802.11 g	1	11.0	
	2	12.0	
	6	12.0	
	10	12.0	
	11	11.5	
802.11 n20	1	10.5	
	2	11.0	
	6	11.0	
	10	11.0	
	11	10.0	
802.11 n40	3	9.5	
	4	10.0	
	5	10.0	
	6	11.0	
	9	11.0	

Run software:

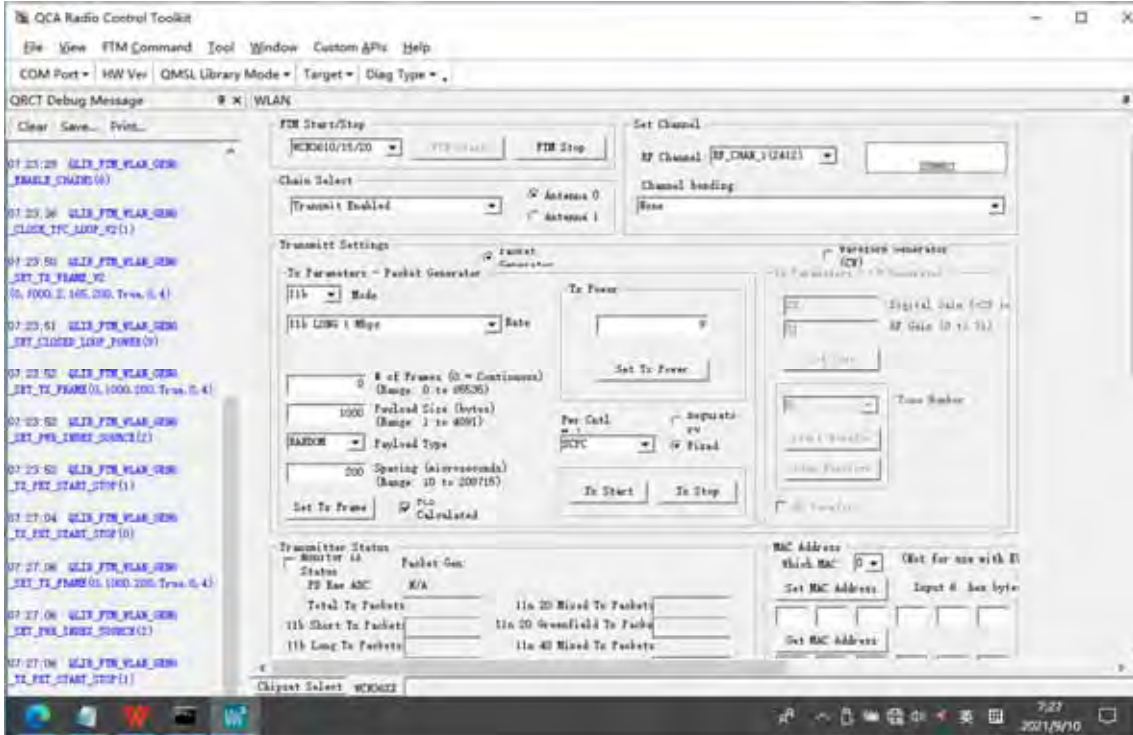

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
4	RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
5	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

#### 3.2 Verdict

No.	Description	FCC PART No.	ISED Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (f)	N/A	Pass <sup>Note 1</sup>
2	Output Power	15.247 (b)	RSS-247, 5.4 (d)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247 (a)	RSS-GEN, 6.7; RSS-247, 5.2 (a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247 (d)	RSS-247, 5.5	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	RSS-GEN, 8.9; RSS-247, 5.5	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	RSS-247, 5.5	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	RSS-247, 5.5	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247 (e)	RSS-247, 5.2 (b)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	RSS-Gen, 7.3	N/A	N/A <sup>Note 2</sup>

Note<sup>1</sup>: Please refer to section 5.1.

Note<sup>2</sup>: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.8 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2021.04.01	2022.03.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.06.01	2022.05.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.01	2022.05.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.01	2022.05.31
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2022.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2019.08.08	2022.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

### 4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.82°C
Humidity	4.1%


### 4.4 Description of Test Setup

#### 4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

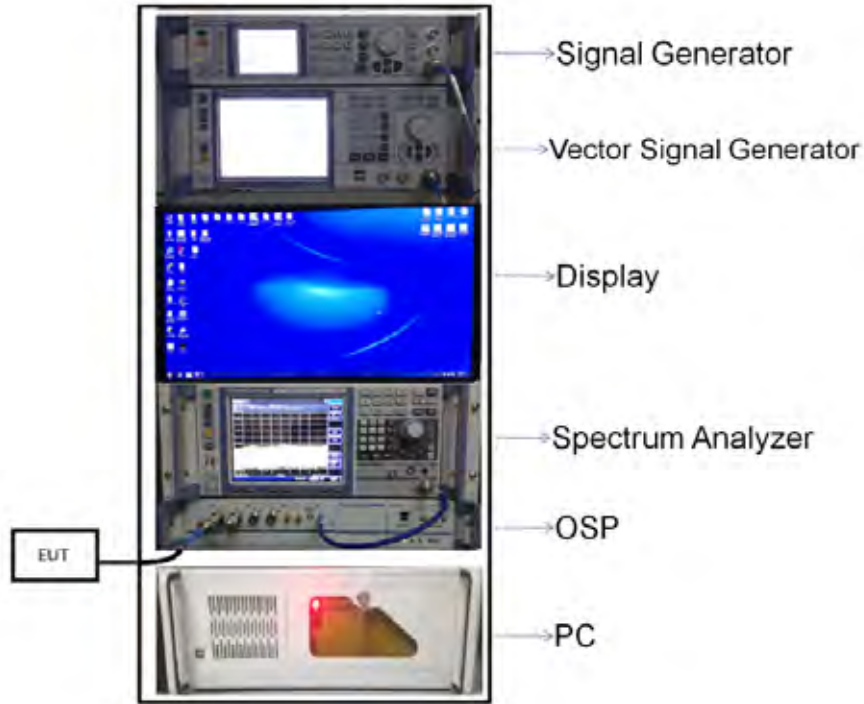


(Diagram 1)

#### 4.4.2 For AC Power Supply Port Test

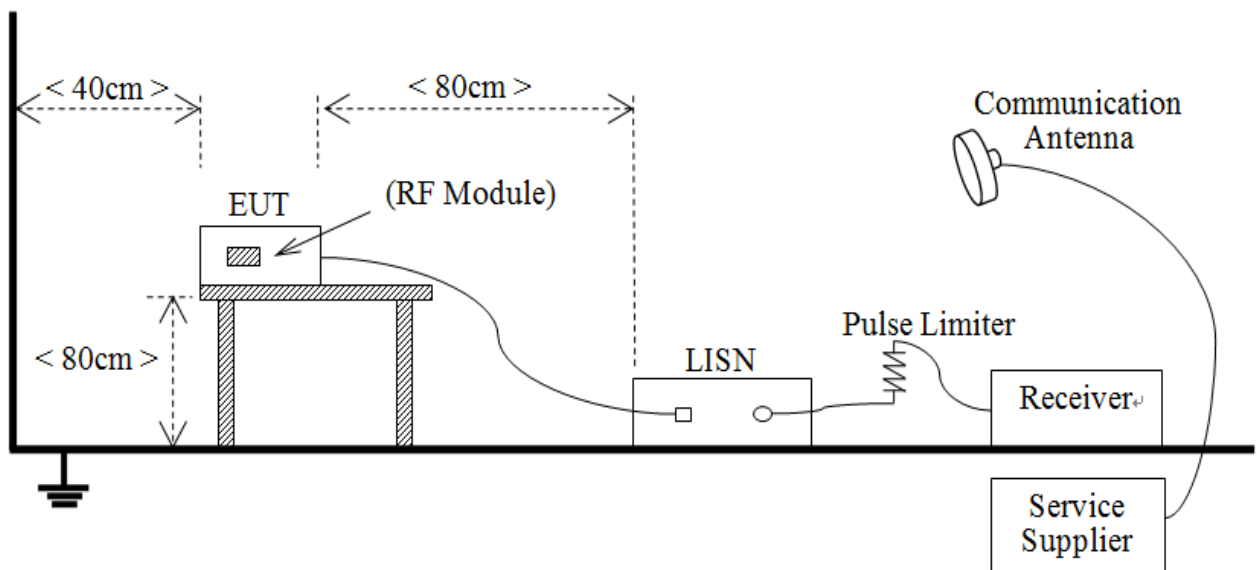


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

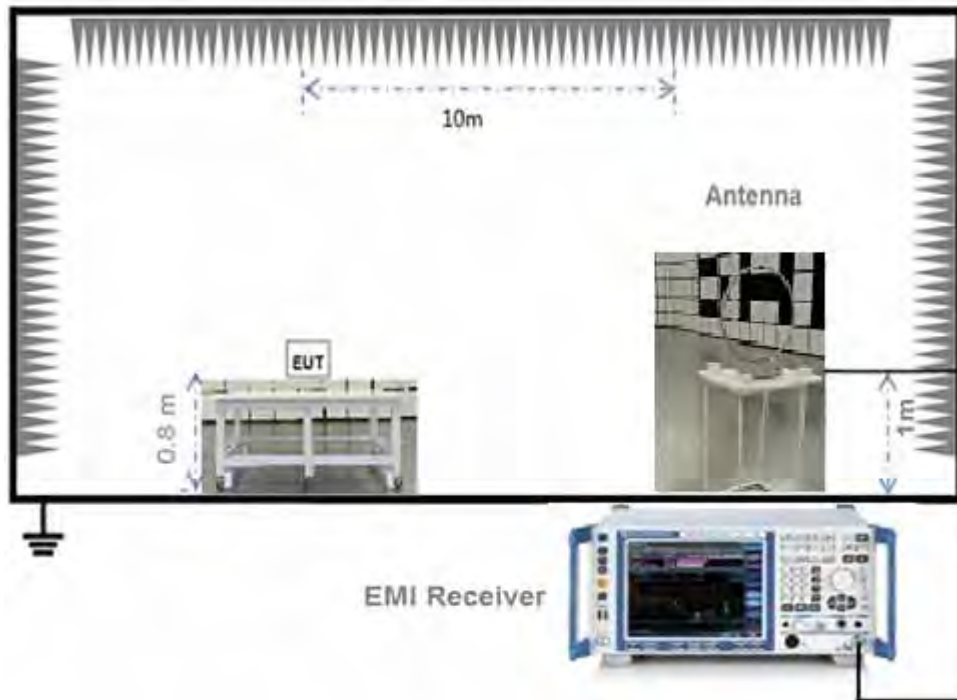


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

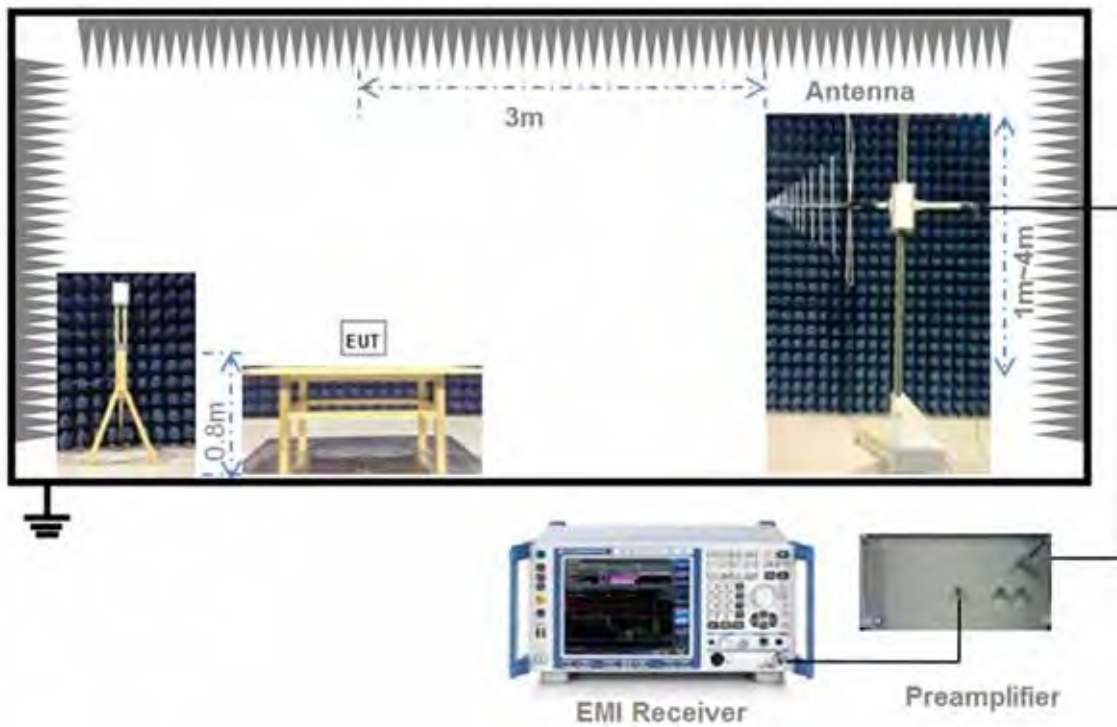

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

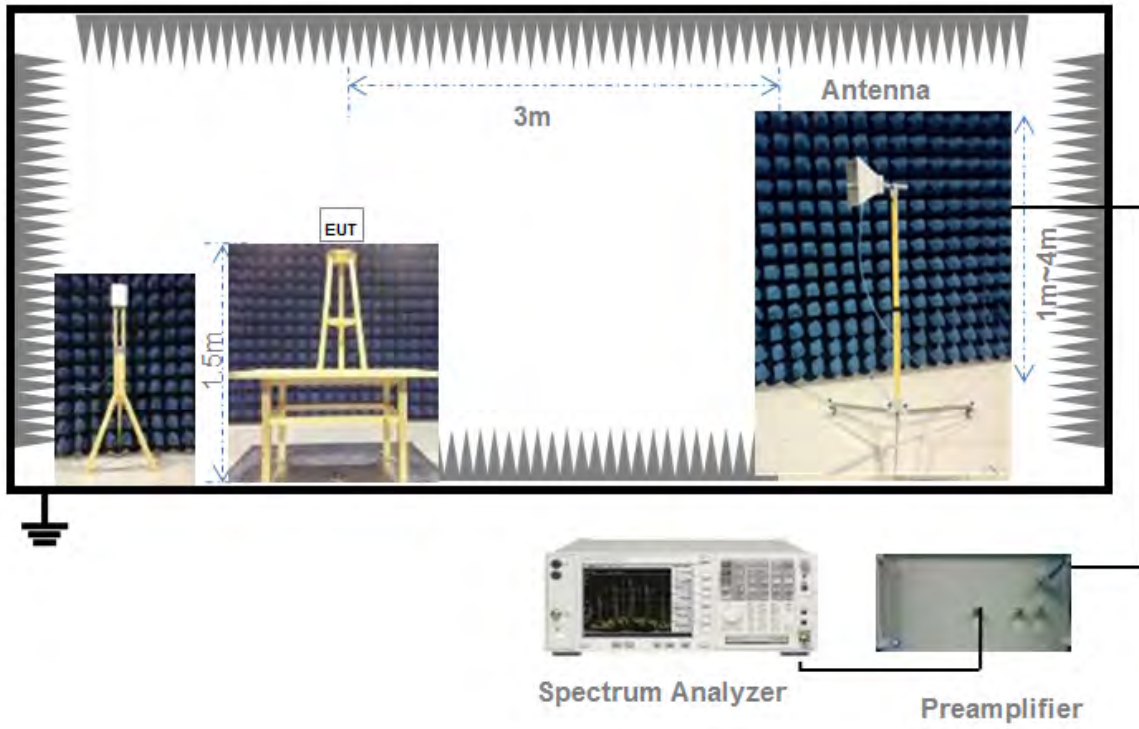

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)



## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203; RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Output Power

### 5.2.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (d)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

#### Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding  $10\log(1/x)$ , where x is the duty cycle to the measurement result.

#### Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.

Set  $VBW \geq RBW$ . Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 6dB Bandwidth

### 5.3.1 Limit

FCC §15.247(a); RSS-GEN, 6.7; RSS-247, 5.2 (a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) = 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Conducted Spurious Emission

### 5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

#### Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW 3 x RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

### Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW = 3 x RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

#### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Band Edge (Authorized-band band-edge)

### 5.5.1 Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle 98%). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW = 3 x RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (f<sub>emission</sub>)  $\pm$  0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by f<sub>emission</sub>  $\pm$  0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

#### 5.5.4 Test Result

Please refer to ANNEX A.4.



## 5.6 Conducted Emission

### 5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.6.4 Test Result

Please refer to ANNEX A.5.

## 5.7 Radiated Spurious Emission

### 5.7.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

### 5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

#### General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

#### Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

#### Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz	1 MHz
------------	-------

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

#### Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle  $\geq 98$  percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW  $\geq 3 \times$  RBW.
- e) Detector = RMS, if  $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

#### Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

#### Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

#### 5.7.4 Test Result

Please refer to ANNEX A.6.

## 5.8 Band Edge (Restricted-band band-edge)

### 5.8.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

### 5.8.4 Test Result

Please refer to ANNEX A.7.

## 5.9 Power Spectral density (PSD)

### 5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

### 5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz      RBW      100 kHz.

Set the VBW      3 RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.9.4 Test Result

Please refer to ANNEX A.8.

## ANNEX A TEST RESULT

### A.1 Output Power

#### Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle
802.11b	8.219	8.425	97.55%
802.11g	1.362	1.564	87.08%
802.11n-20 MHz	1.274	1.474	86.43%
802.11n-40 MHz	0.632	0.842	75.04%

#### Peak Power Test Data

##### 802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
1	12.23	16.71	30	1000	Pass
2	12.47	17.66			Pass
3	14.53	28.38			Pass
4	17.03	50.47			Pass
6	15.78	37.84			Pass
11	17.51	56.36			Pass

##### 802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
1	19.66	92.47	30	1000	Pass
2	20.69	117.22			Pass
6	18.37	68.71			Pass
10	19.88	97.27			Pass
11	18.99	79.25			Pass

##### 802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
1	19.05	80.35	30	1000	Pass
2	18.56	71.78			Pass
6	17.19	52.36			Pass
10	18.28	67.30			Pass
11	17.39	54.83			Pass



802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
3	17.83	60.67	30	1000	Pass
4	17.72	59.16			Pass
5	16.93	49.32			Pass
6	17.49	56.10			Pass
9	17.53	56.62			Pass

**Average Power Test Data**
**802.11b Mode:**

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
1	13.25	21.13	30	1000	Pass
2	15.11	32.43			Pass
3	0.11	1.03			Pass
4	14.20	26.30			Pass
6	13.25	21.13			Pass
11	15.11	32.43			Pass

**802.11g Mode:**

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
1	12.11	16.26	30	1000	Pass
2	13.12	20.51			Pass
6	11.07	12.79			Pass
10	12.32	17.06			Pass
11	11.39	13.77			Pass

**802.11n-20 MHz Mode:**

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
1	11.55	14.29	30	1000	Pass
2	11.04	12.71			Pass
6	10.17	10.40			Pass
10	10.73	11.83			Pass
11	9.84	9.64			Pass

**802.11n-40 MHz Mode:**

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
3	10.94	12.42	30	1000	Pass
4	10.85	12.16			Pass
5	10.04	10.09			Pass
6	11.16	13.06			Pass
9	11.12	12.94			Pass

**E.I.R.P Test Data (For ISED)**
**802.11b Mode:**

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
1	14.43	27.73	36	4	Pass
2	14.67	29.31			Pass
3	16.73	47.10			Pass
4	19.23	83.75			Pass
6	17.98	62.81			Pass
11	19.71	93.54			Pass

**802.11g Mode:**

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
1	21.86	153.46	36	4	Pass
2	22.89	194.54			Pass
6	20.57	114.02			Pass
10	22.08	161.44			Pass
11	21.19	131.52			Pass

**802.11n-20 MHz Mode:**

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
1	21.25	133.35	36	4	Pass
2	20.76	119.12			Pass
6	19.39	86.90			Pass
10	20.48	111.69			Pass
11	19.59	90.99			Pass

**802.11n-40 MHz Mode:**

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
3	20.03	100.69	36	4	Pass
4	19.92	98.17			Pass
5	19.13	81.85			Pass
6	19.69	93.11			Pass
9	19.73	93.97			Pass

## A.2 Bandwidth

### Test Data

#### 802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
1	8.150000	13.055000	500
2	9.100000	13.220000	500
3	9.150000	13.257000	500
4	8.600000	13.192000	500
6	9.600000	13.149000	500
11	9.650000	13.147000	500

#### 802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
1	16.050000	17.494000	500
2	16.100000	17.816000	500
6	16.450000	17.805000	500
10	15.800000	17.537000	500
11	15.850000	17.805000	500

#### 802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
1	16.450000	18.376000	500
2	16.450000	18.579000	500
6	17.650000	18.636000	500
10	16.450000	18.403000	500
11	16.450000	18.451000	500

#### 802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
3	35.500000	36.400000	500
4	35.550000	36.695000	500
5	35.850000	36.695000	500
6	35.350000	36.467000	500
9	35.200000	35.880000	500

## Test plots

## 6 dB Bandwidth

802.11b CHANNEL 1



802.11b CHANNEL 2



802.11b CHANNEL 3



802.11b CHANNEL 4



802.11b CHANNEL 6



802.11b CHANNEL 11



802.11g CHANNEL 1



802.11g CHANNEL 2



802.11g CHANNEL 6



802.11g CHANNEL 10



802.11g CHANNEL 11



802.11n-20 MHz CHANNEL 1



802.11n-20 MHz CHANNEL 2



802.11n-20 MHz CHANNEL 6



802.11n-20 MHz CHANNEL 10



802.11n-20 MHz CHANNEL 11



802.11n-40 MHz CHANNEL 3



802.11n-40 MHz CHANNEL 4




802.11n-40 MHz CHANNEL 5



802.11n-40 MHz CHANNEL 6




802.11n-40 MHz CHANNEL 9

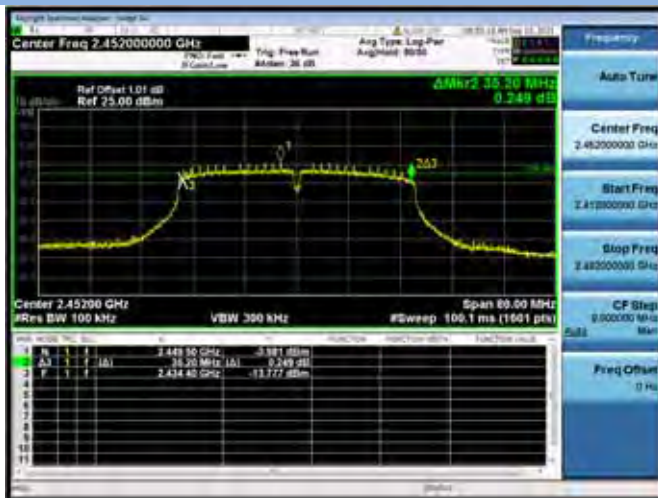




99% Bandwidth

802.11b CHANNEL 1

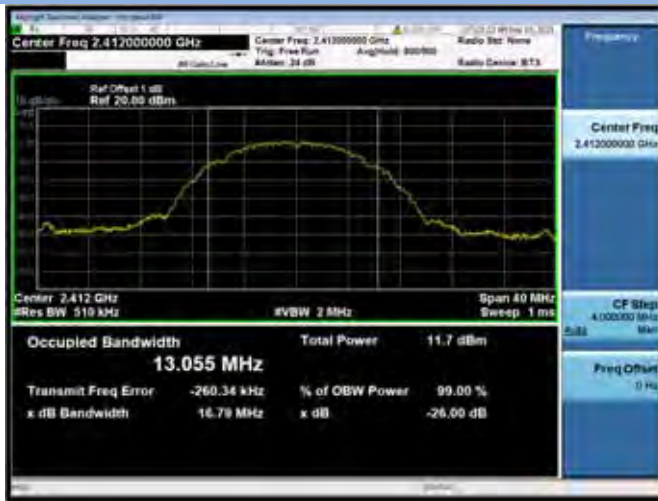


802.11b CHANNEL 2

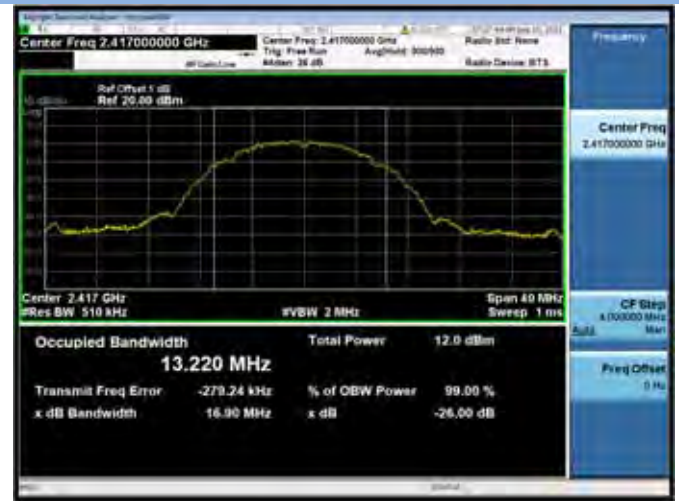


802.11b CHANNEL 3




802.11b CHANNEL 4

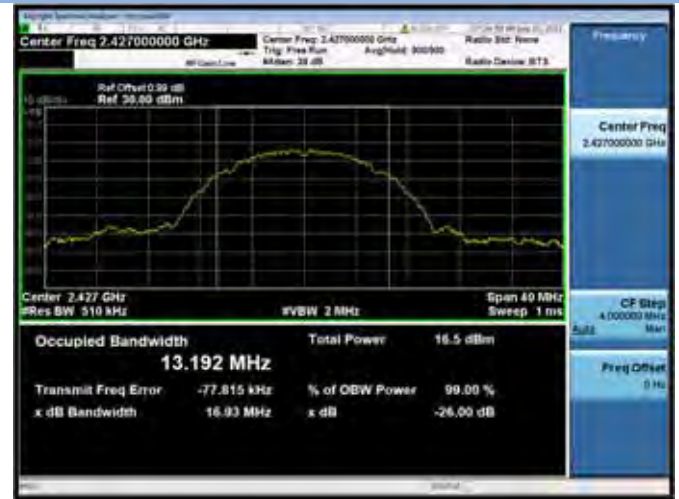


802.11b CHANNEL 6

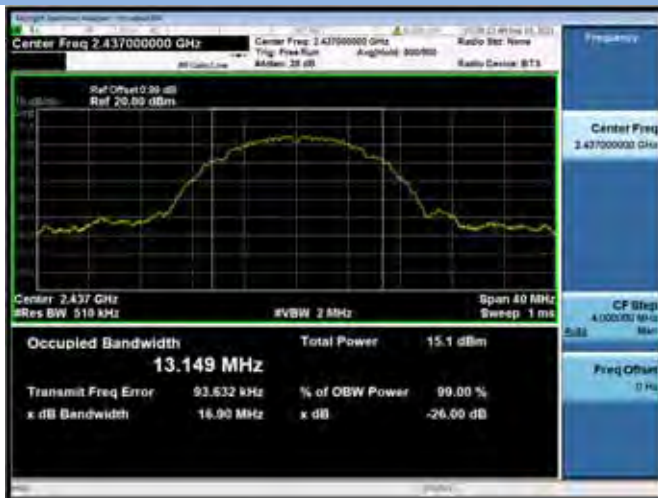


802.11b CHANNEL 11

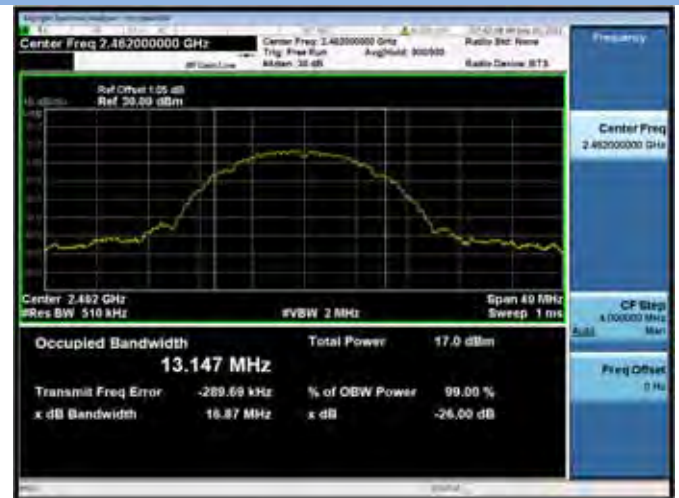

802.11g LOW CHANNEL 1

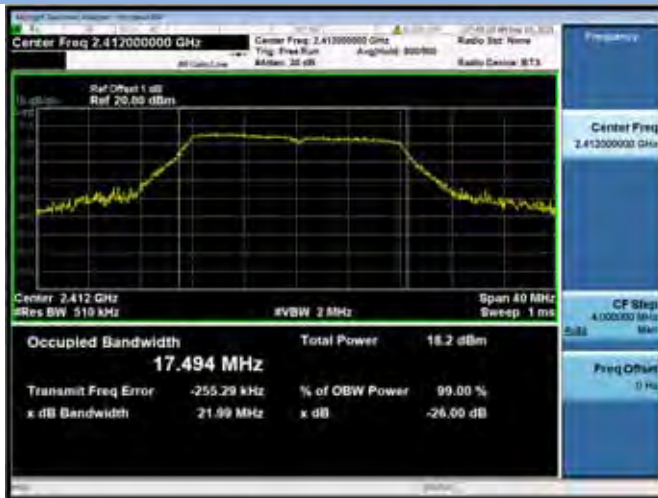


802.11g LOW CHANNEL 2

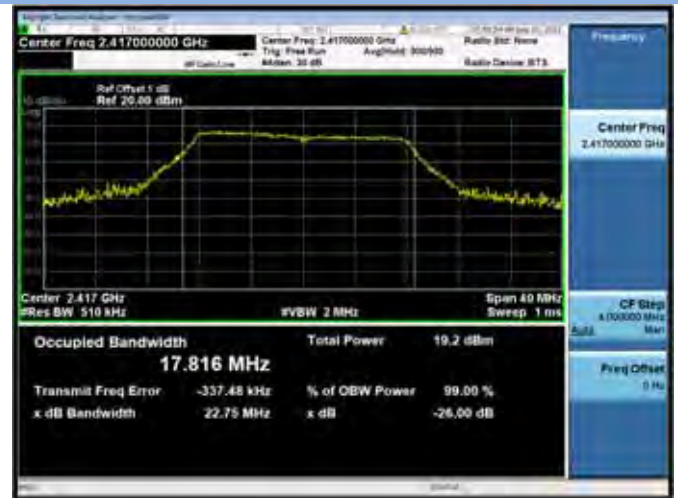

802.11g LOW CHANNEL 6



802.11g LOW CHANNEL 10

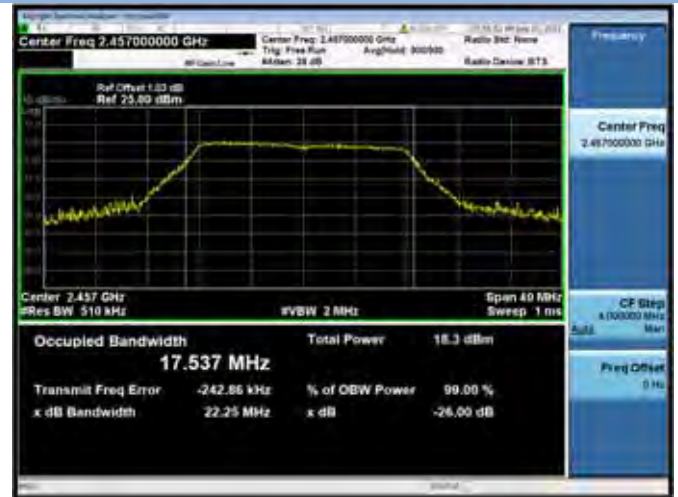


802.11g LOW CHANNEL 11



802.11n-20 CHANNEL 1



802.11n-20 CHANNEL 2

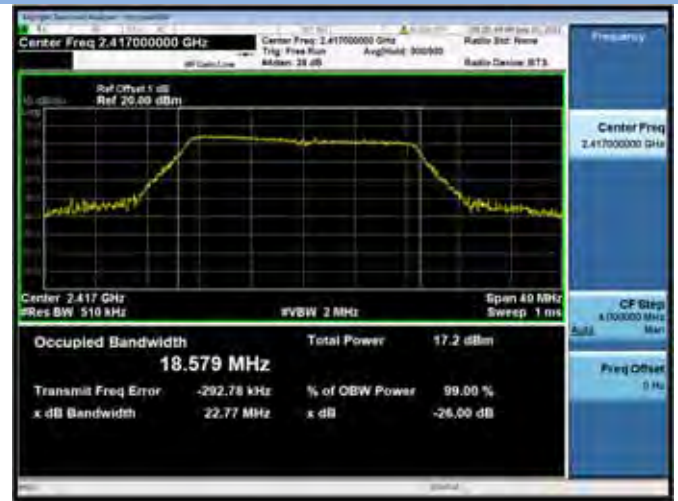

802.11n-20 CHANNEL 6



802.11n-20 CHANNEL 10



802.11n-20 CHANNEL 11



## 802.11n-40 CHANNEL 3




## 802.11n-40 CHANNEL 4




## 802.11n-40 CHANNEL 5



## 802.11n-40 CHANNEL 6

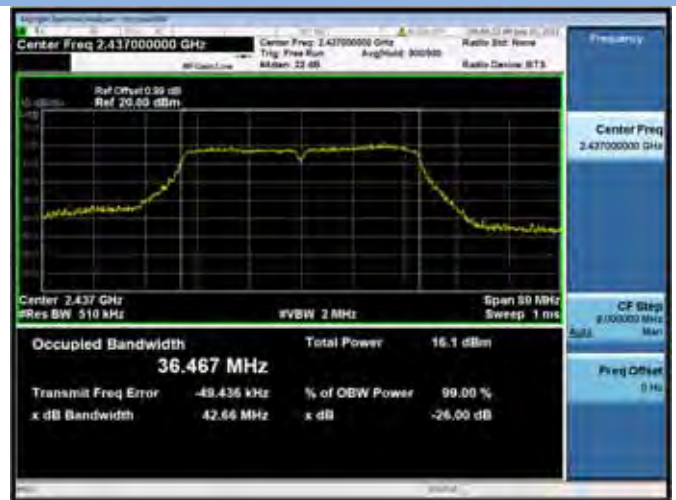

## 802.11n-40 CHANNEL 9

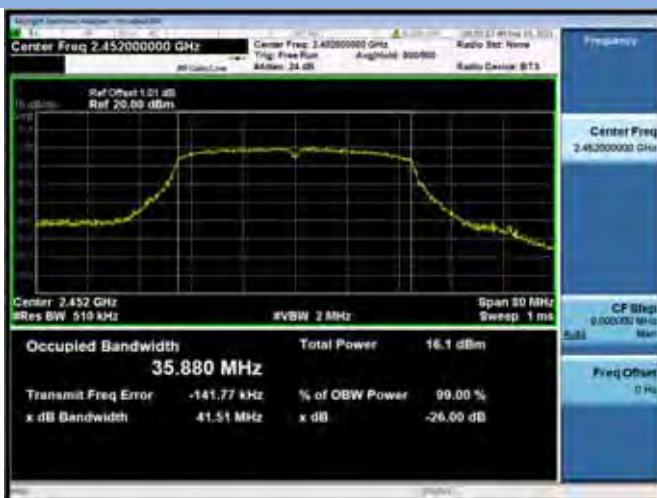

### A.3 Conducted Spurious Emissions

#### Test Data

##### 802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
1	-48.13	1.13	-18.87	Pass
2	-48.41	1.41	-18.59	Pass
3	-47.41	3.36	-16.64	Pass
4	-48.98	5.89	-14.11	Pass
6	-47.08	4.72	-15.28	Pass
11	-49.21	6.22	-13.78	Pass

##### 802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
1	-46.98	1.36	-18.64	Pass
2	-48.46	2.92	-17.08	Pass
6	-48.07	-0.79	-20.79	Pass
10	-47.99	0.85	-19.16	Pass
11	-47.19	0.94	-19.06	Pass

##### 802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
1	-48.33	0.84	-19.16	Pass
2	-47.39	0.39	-19.61	Pass
6	-48.67	-1.87	-21.87	Pass
10	-48.27	-0.34	-20.34	Pass
11	-47.16	-0.56	-20.56	Pass

##### 802.11n-40MHz Mode:


Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
3	-46.30	-2.76	-22.76	Pass
4	-46.30	-3.28	-23.28	Pass
5	-48.73	-4.61	-24.61	Pass
6	-48.73	-3.48	-23.48	Pass
9	-49.21	-3.88	-23.88	Pass

Test Plots

802.11b CHANNEL 1



802.11b CHANNEL 1, SPURIOUS 30 MHz ~ 3 GHz

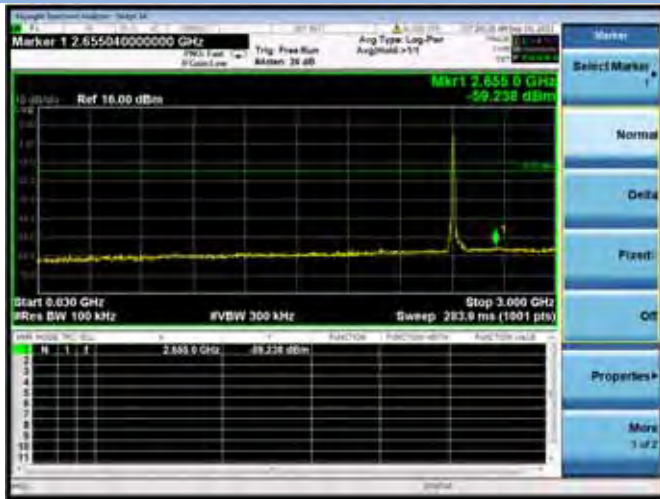


802.11b CHANNEL 1, SPURIOUS 2 GHz ~ 25 GHz



802.11b CHANNEL 2 CARRIER LEVEL



802.11b CHANNEL 2, SPURIOUS  
30 MHz ~ 3 GHz

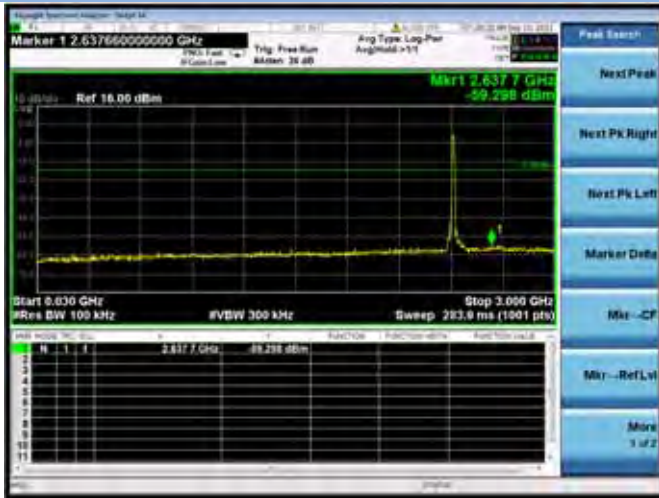


802.11b CHANNEL 2, SPURIOUS  
2 GHz ~ 25 GHz



802.11b CHANNEL 3 CARRIER LEVEL



802.11b CHANNEL 3, SPURIOUS  
30 MHz ~ 3 GHz

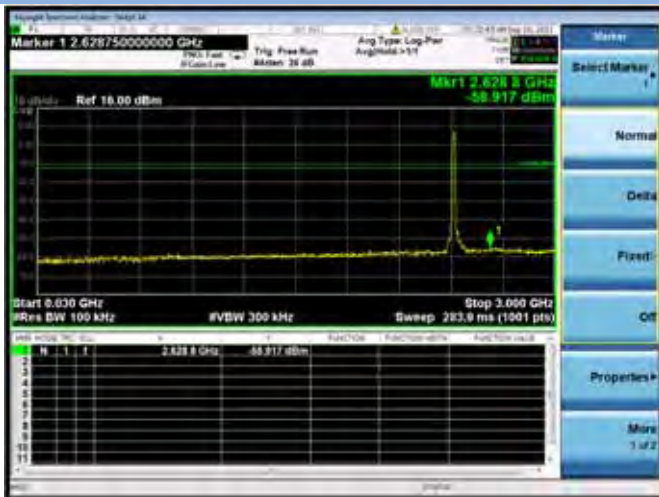


802.11b CHANNEL 3, SPURIOUS  
2 GHz ~ 25 GHz



802.11b CHANNEL 4 CARRIER LEVEL



802.11b CHANNEL 4, SPURIOUS 30 MHz ~ 3 GHz

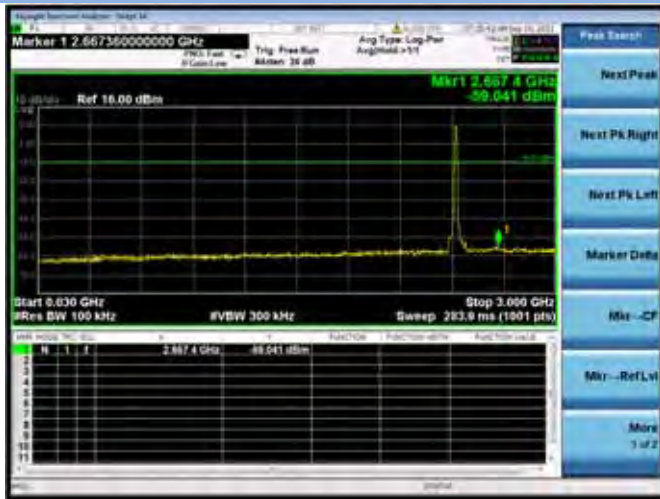

802.11b CHANNEL 4, SPURIOUS 2 GHz ~ 25 GHz




802.11b CHANNEL 6 CARRIER LEVEL






802.11b CHANNEL 6, SPURIOUS  
30 MHz ~ 3 GHz

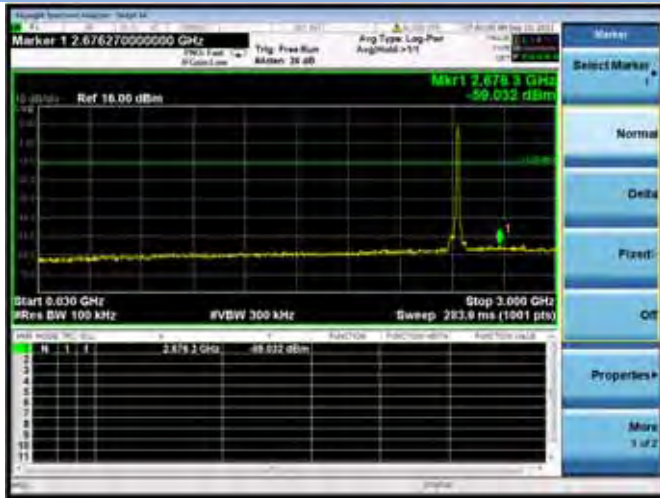


802.11b CHANNEL 6, SPURIOUS  
2 GHz ~ 25 GHz

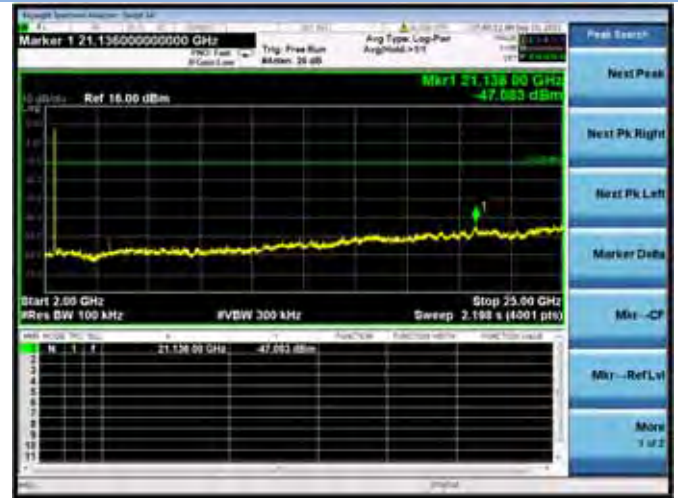

802.11b CHANNEL 11 CARRIER LEVEL



802.11b CHANNEL 11, SPURIOUS  
30 MHz ~ 3 GHz

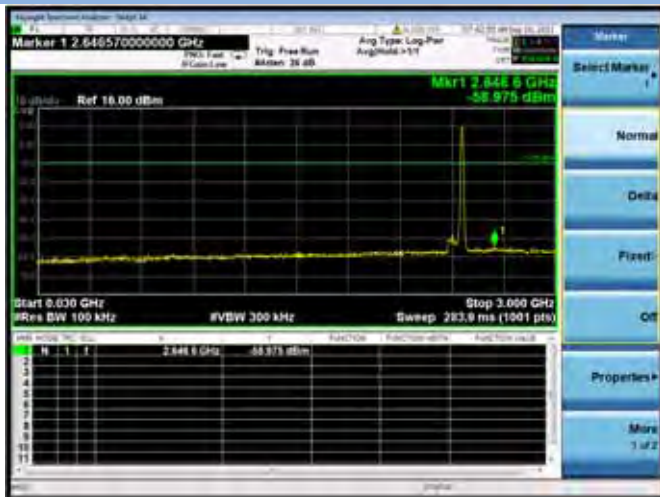


802.11g CHANNEL 11, SPURIOUS  
2 GHz ~ 25 GHz




802.11g CHANNEL 1 CARRIER LEVEL



802.11g CHANNEL 1, SPURIOUS 30 MHz ~ 3 GHz

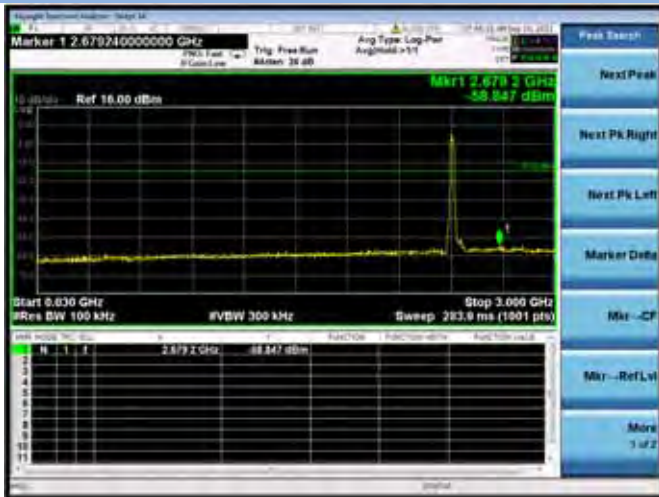


802.11g CHANNEL 1, SPURIOUS 2 GHz ~ 25 GHz

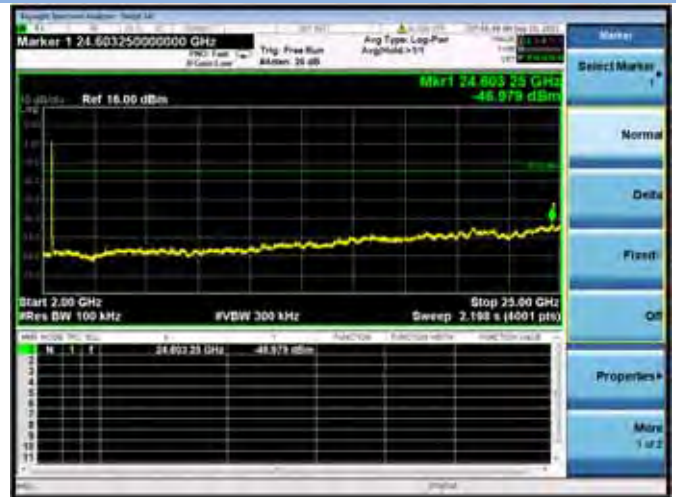

802.11g CHANNEL 2 CARRIER LEVEL



802.11g CHANNEL 2, SPURIOUS  
30 MHz ~ 3 GHz

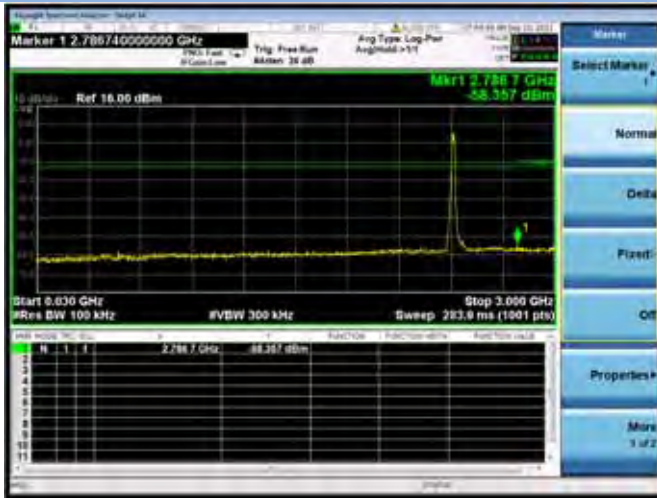


802.11g CHANNEL 2, SPURIOUS  
2 GHz ~ 25 GHz



802.11g CHANNEL 6 CARRIER LEVEL



802.11g CHANNEL 6, SPURIOUS  
30 MHz ~ 3 GHz

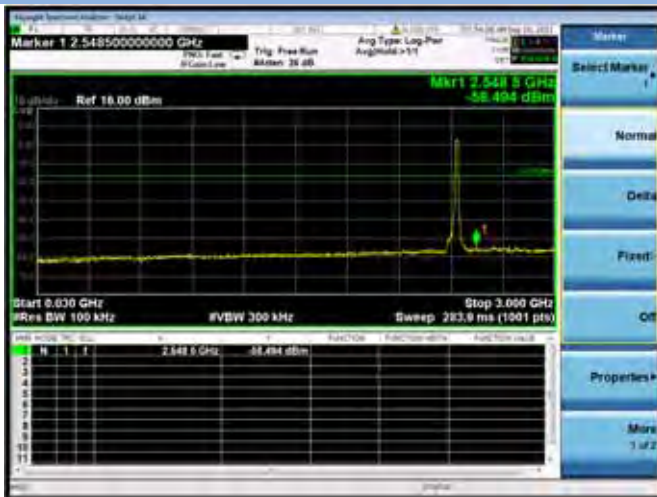


802.11g CHANNEL 6, SPURIOUS  
2 GHz ~ 25 GHz



802.11g CHANNEL 10 CARRIER LEVEL



802.11g CHANNEL 10, SPURIOUS  
30 MHz ~ 3 GHz

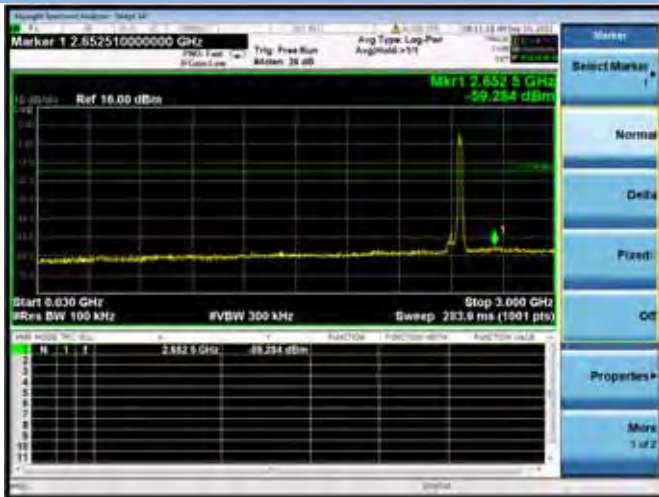


802.11g CHANNEL 10, SPURIOUS  
2 GHz ~ 25 GHz



802.11g CHANNEL 11 CARRIER LEVEL



802.11g CHANNEL 11, SPURIOUS  
30 MHz ~ 3 GHz

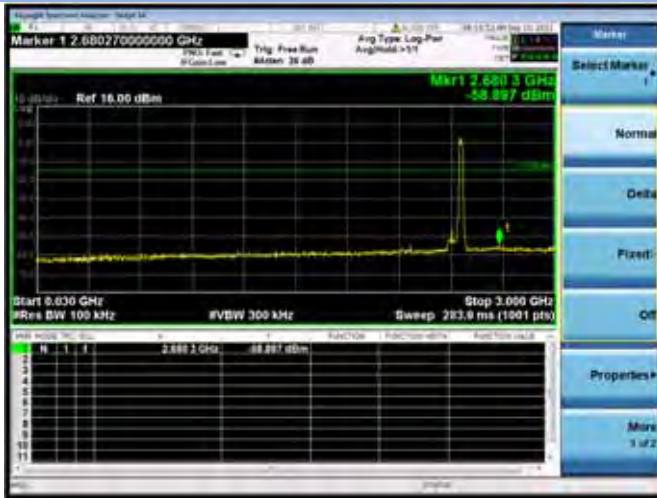


802.11g CHANNEL 11, SPURIOUS  
2 GHz ~ 25 GHz



802.11n-20 CHANNEL 1 CARRIER LEVEL



802.11n-20 CHANNEL 1, SPURIOUS  
30 MHz ~ 3 GHz

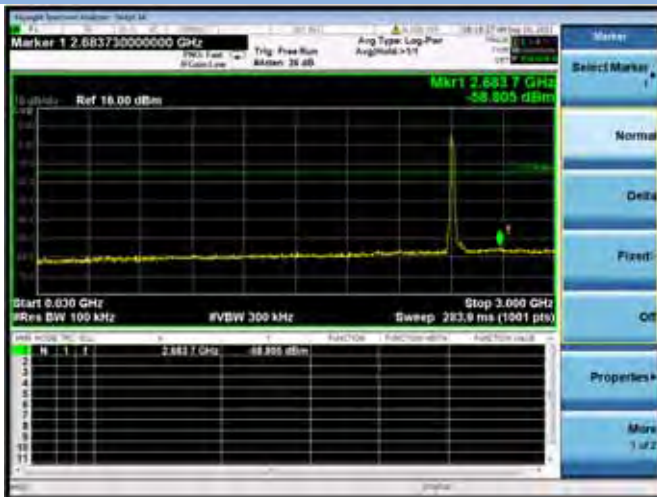


802.11n-20 CHANNEL 1, SPURIOUS  
2 GHz ~ 25 GHz



802.11n-20 CHANNEL 2 CARRIER LEVEL




802.11n-20 CHANNEL 2, SPURIOUS  
30 MHz ~ 3 GHz

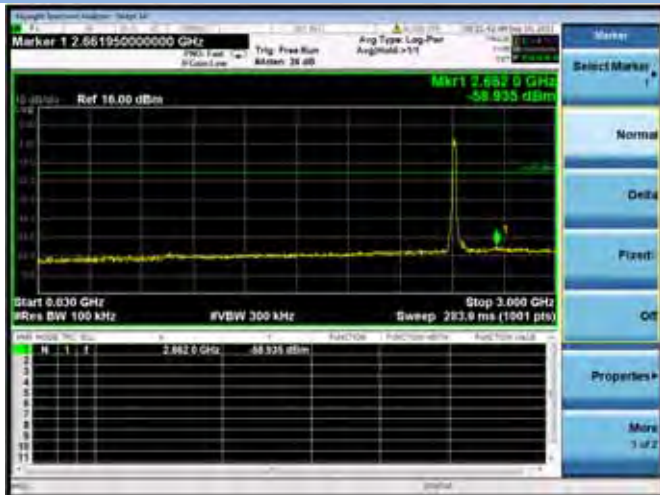


802.11n-20 CHANNEL 2, SPURIOUS  
2 GHz ~ 25 GHz



802.11n-20 CHANNEL 6 CARRIER LEVEL

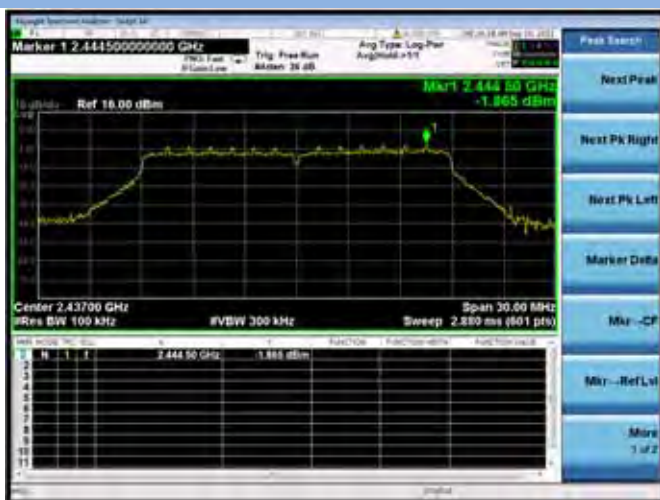


802.11n-20 CHANNEL 6, SPURIOUS  
30 MHz ~ 3 GHz

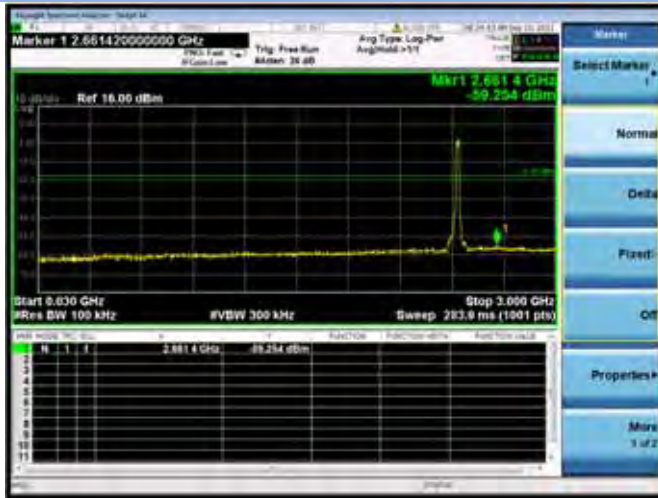


802.11n-20 CHANNEL 6, SPURIOUS  
2 GHz ~ 25 GHz



802.11n-20 CHANNEL 10 CARRIER LEVEL

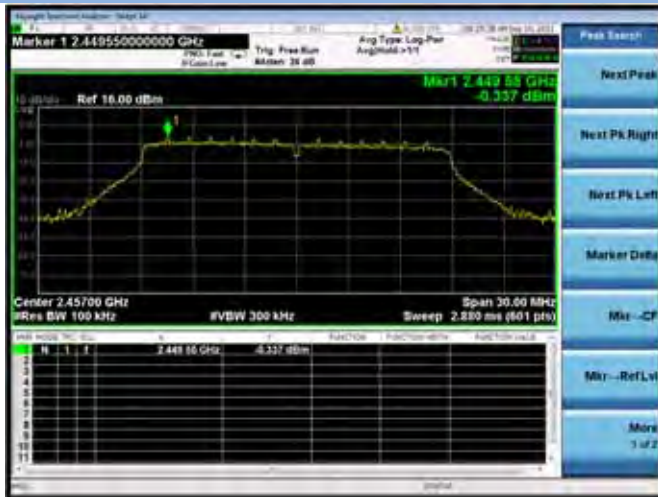

802.11n-20 CHANNEL 10, SPURIOUS  
30 MHz ~ 3 GHz

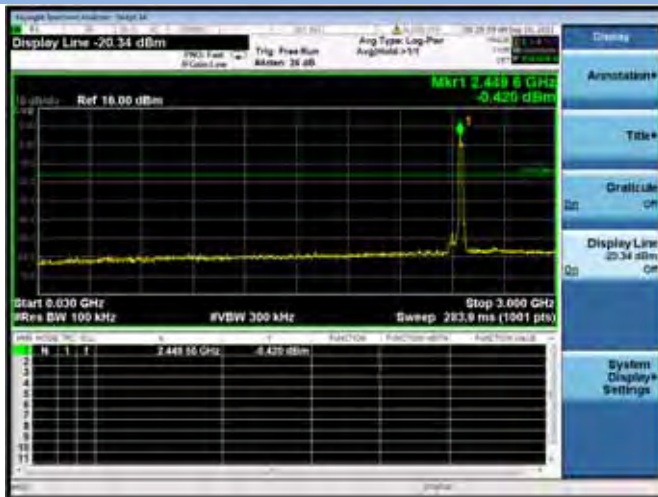


802.11n-20 CHANNEL 10, SPURIOUS  
2 GHz ~ 25 GHz




802.11n-20 CHANNEL 11 CARRIER LEVEL




802.11n-20 CHANNEL 11, SPURIOUS  
30 MHz ~ 3 GHz

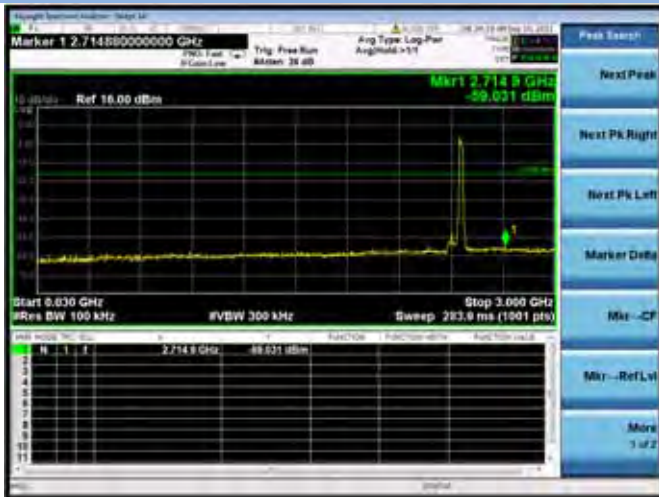

802.11n-20 CHANNEL 11, SPURIOUS  
2 GHz ~ 25 GHz

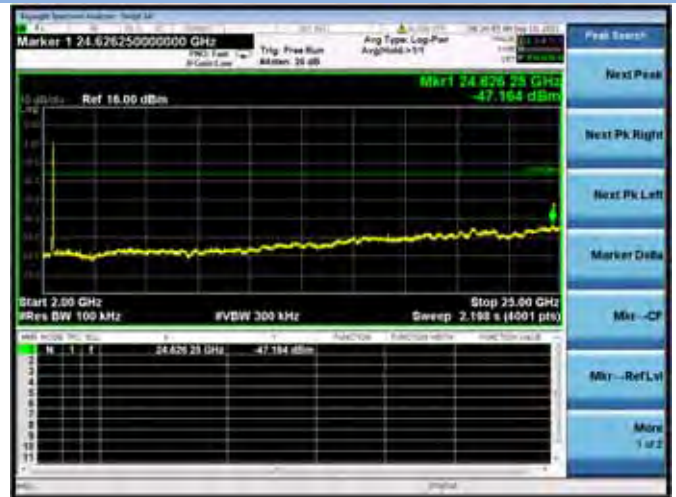


802.11n-40 CHANNEL 3 CARRIER LEVEL

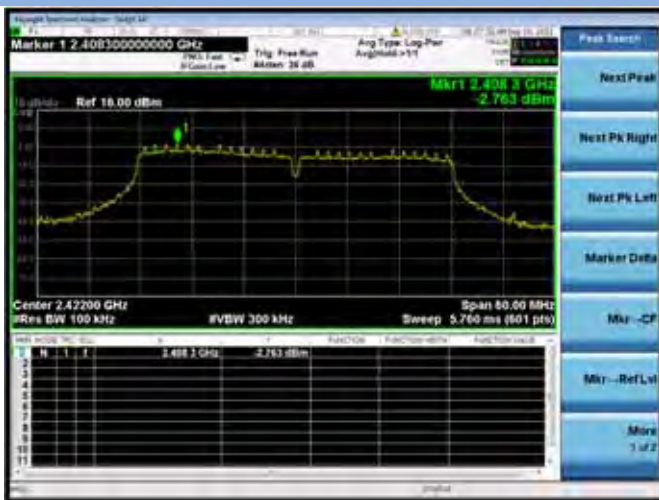




802.11n-40 CHANNEL 3, SPURIOUS  
30 MHz ~ 3 GHz

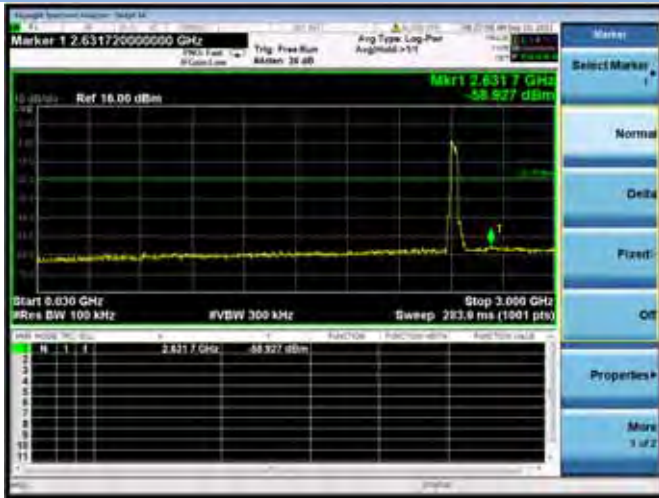


802.11n-40 CHANNEL 3, SPURIOUS  
2 GHz ~ 25 GHz



802.11n-40 CHANNEL 4 CARRIER LEVEL

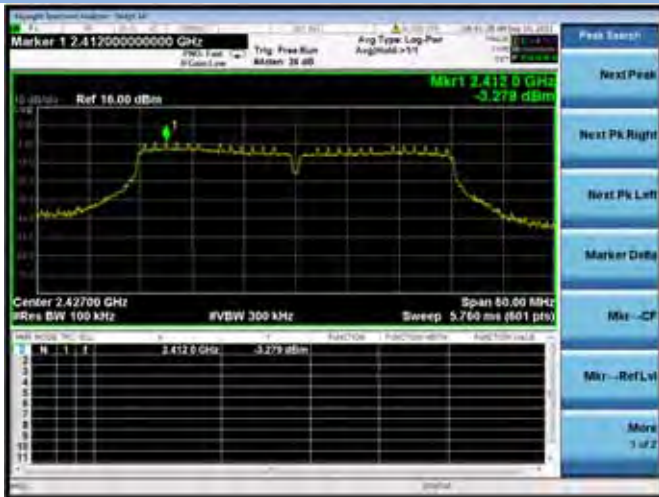


802.11n-40 CHANNEL 4, SPURIOUS  
30 MHz ~ 3 GHz

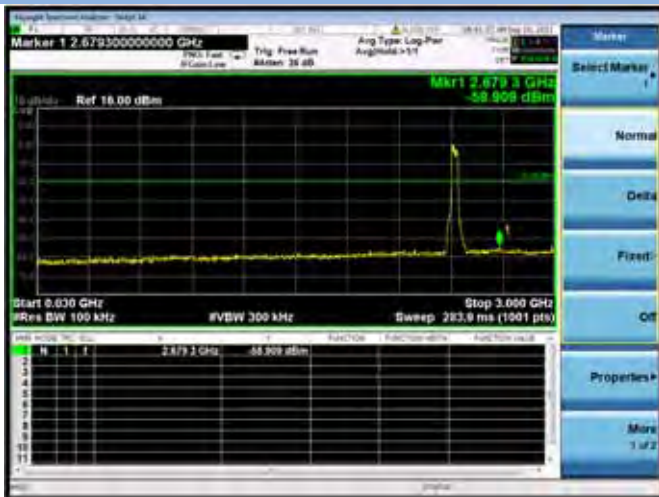


802.11n-40 CHANNEL 4, SPURIOUS  
2 GHz ~ 25 GHz



802.11n-40 CHANNEL 5 CARRIER LEVEL

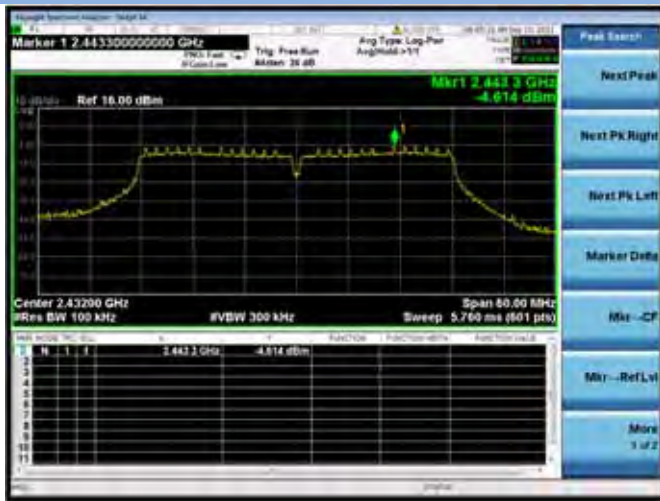


802.11n-40 CHANNEL 5, SPURIOUS  
30 MHz ~ 3 GHz

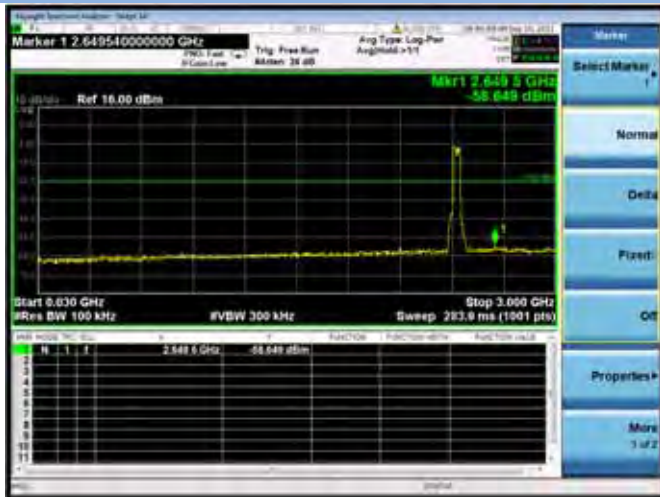


802.11n-40 CHANNEL 5, SPURIOUS  
2 GHz ~ 25 GHz



802.11n-40 CHANNEL 6 CARRIER LEVEL

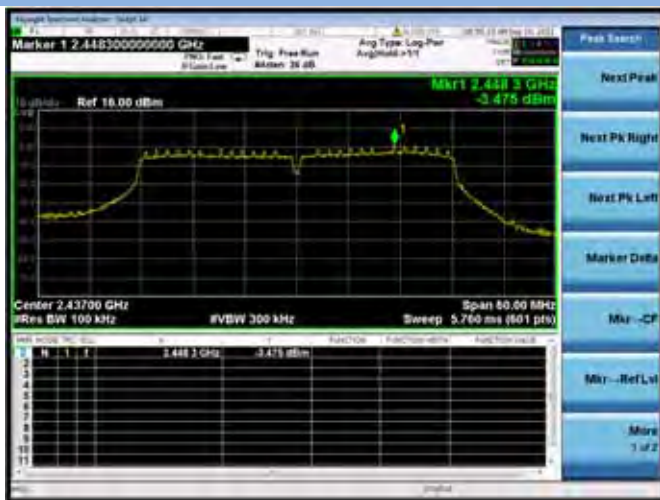


802.11n-40 CHANNEL 6, SPURIOUS  
30 MHz ~ 3 GHz

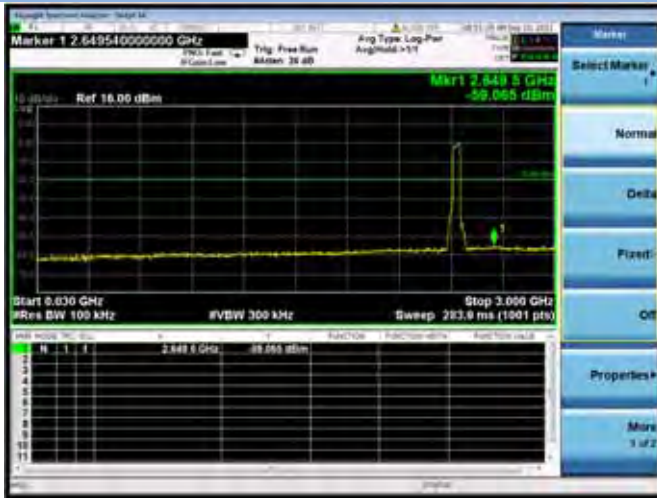


802.11n-40 CHANNEL 6, SPURIOUS  
2 GHz ~ 25 GHz



802.11n-40 CHANNEL 9 CARRIER LEVEL

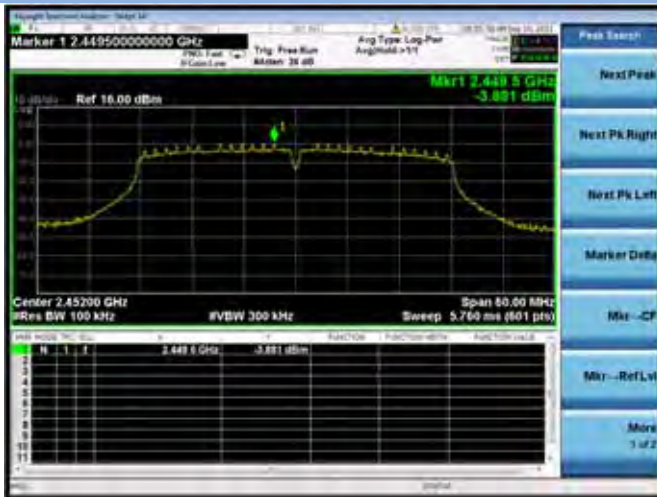

802.11n-40 CHANNEL 9, SPURIOUS  
30 MHz ~ 3 GHz

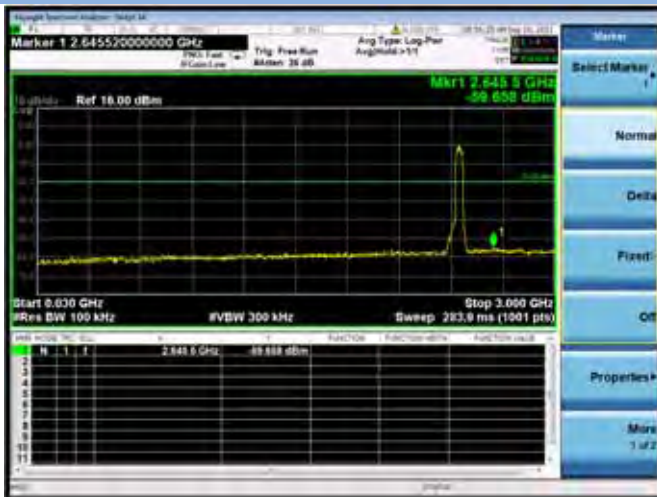

802.11n-40 CHANNEL 9, SPURIOUS  
2 GHz ~ 25 GHz



## A.4 Band Edge (Authorized-band band-edge)

### Test Data

Note: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

#### 802.11b Mode :

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
1	-50.95	1.13	-18.87	Pass
2	-53.69	1.41	-18.59	Pass
3	-53.84	3.36	-16.64	Pass
4	-53.88	5.89	-14.11	Pass
11	-55.44	6.22	-13.78	Pass

#### 802.11g Mode :

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
1	-39.36	1.36	-18.64	Pass
2	-41.61	2.92	-17.08	Pass
10	-56.19	0.85	-19.16	Pass
11	-53.21	0.94	-19.06	Pass

#### 802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
1	-40.25	0.84	-19.16	Pass
2	-46.38	0.39	-19.61	Pass
10	-56.50	-0.34	-20.34	Pass
11	-54.25	-0.56	-20.56	Pass

#### 802.11n-40 MHz Mode:


Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
3	-37.91	-2.76	-22.76	Pass
4	-43.38	-3.28	-23.28	Pass
5	-45.07	-4.61	-24.61	Pass
9	-52.67	-3.88	-23.88	Pass

Test Plots


802.11b CHANNEL 1, Carrier level



802.11b CHANNEL 1, Reference level

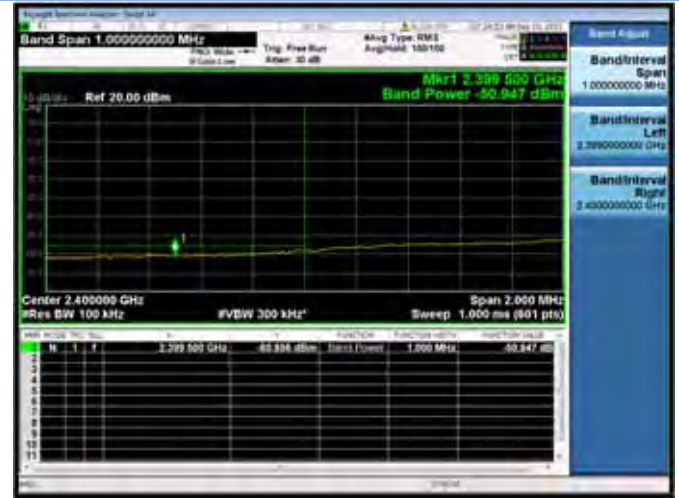

802.11b CHANNEL 2, Carrier level

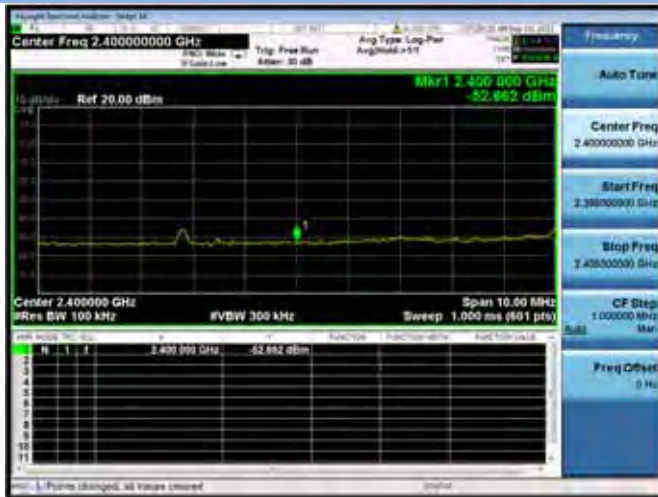

802.11b CHANNEL 2, Reference level




802.11b CHANNEL 3, Carrier level




802.11b CHANNEL 3, Reference level



802.11b CHANNEL 4, Carrier level

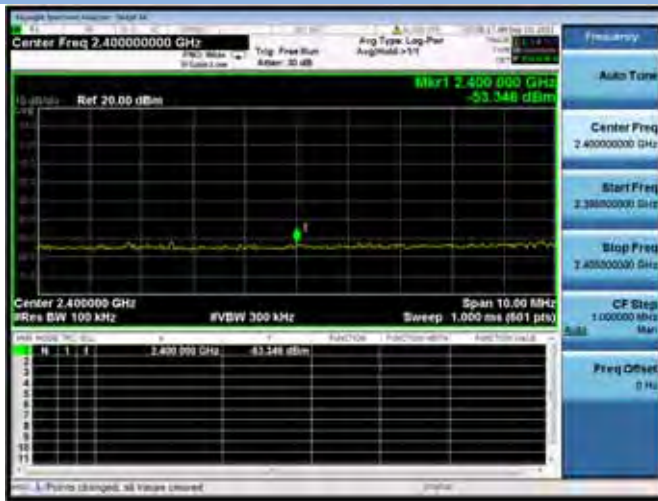


802.11b CHANNEL 4, Reference level

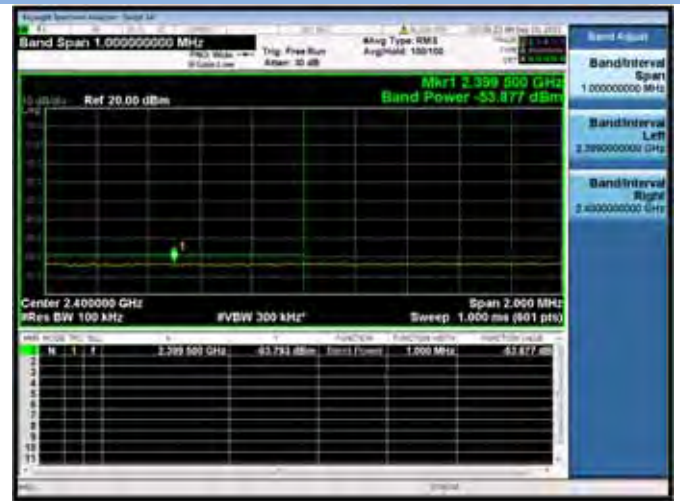

802.11b CHANNEL 11, Carrier level



802.11b CHANNEL 11, Reference level

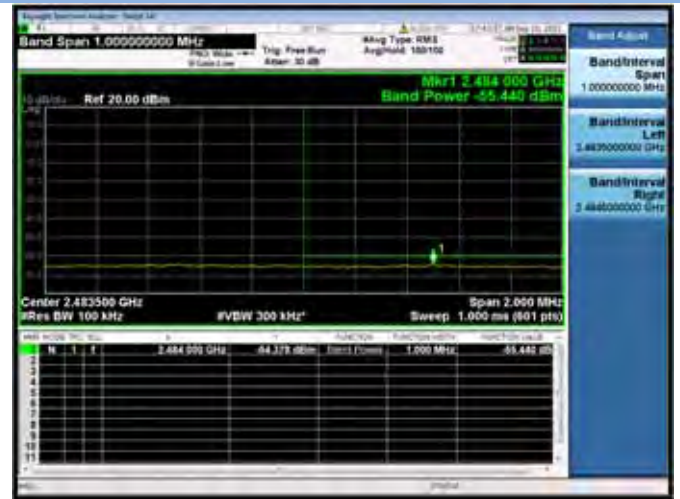


802.11g LOW CHANNEL 1, Carrier level



802.11g LOW CHANNEL 2, Reference level




802.11g CHANNEL 2, Carrier level

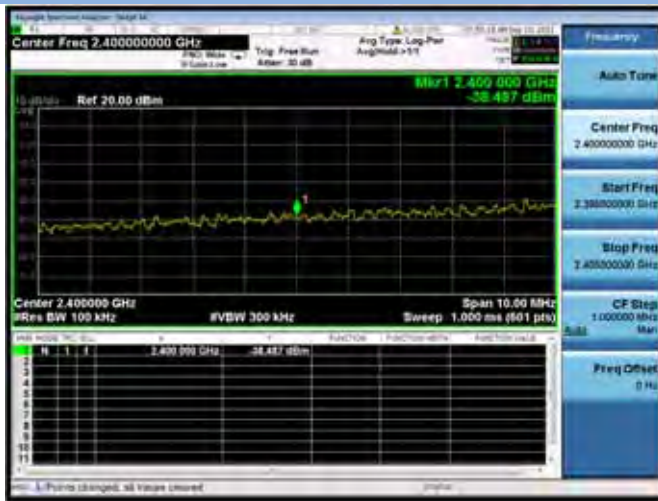


802.11g CHANNEL 2, Reference level



802.11g CHANNEL 10, Carrier level

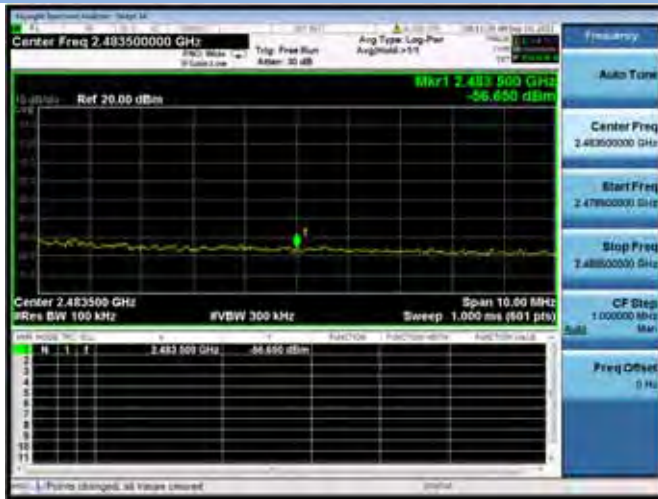

802.11g CHANNEL 10, Reference level

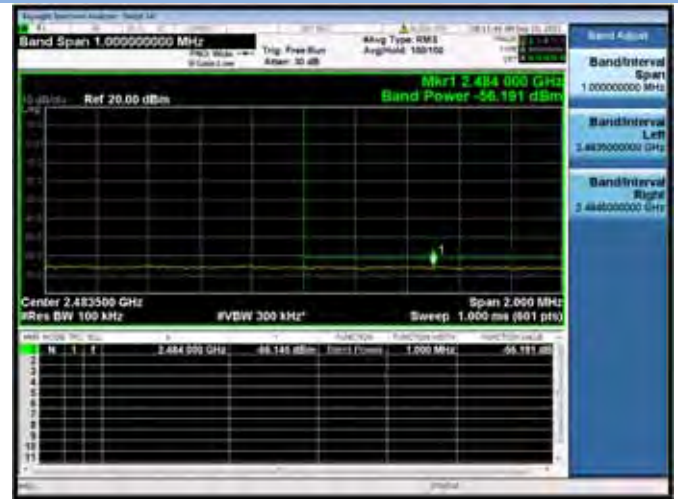

802.11g CHANNEL 11, Carrier level



802.11g CHANNEL 11, Reference level




802.11n-20 MHz CHANNEL 1, Carrier level




802.11n-20 MHz CHANNEL 1, Reference level



802.11n-20 MHz CHANNEL 2, Carrier level

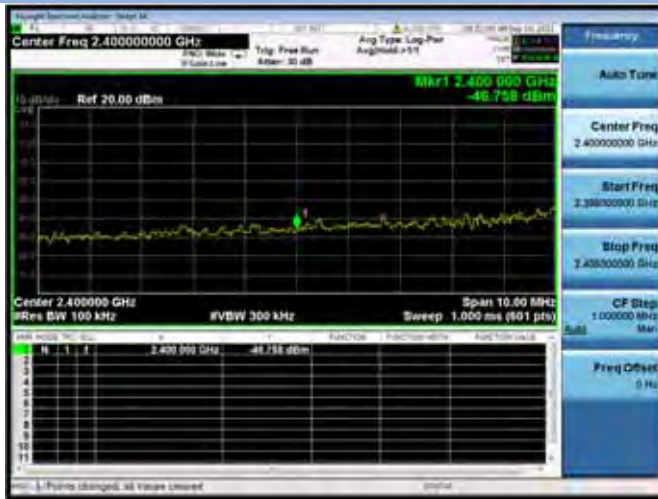

802.11n-20 MHz CHANNEL 2, Reference level

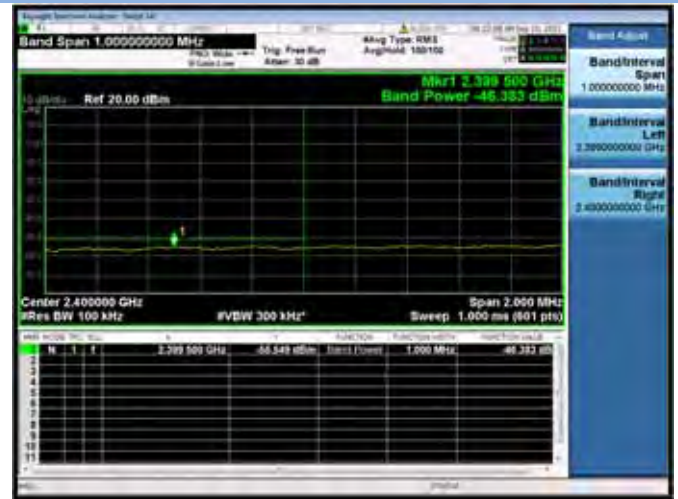

802.11n-20 MHz CHANNEL 10, Carrier level




802.11n-20 MHz CHANNEL 10, Reference level






802.11n-20 MHz CHANNEL 11, Carrier level

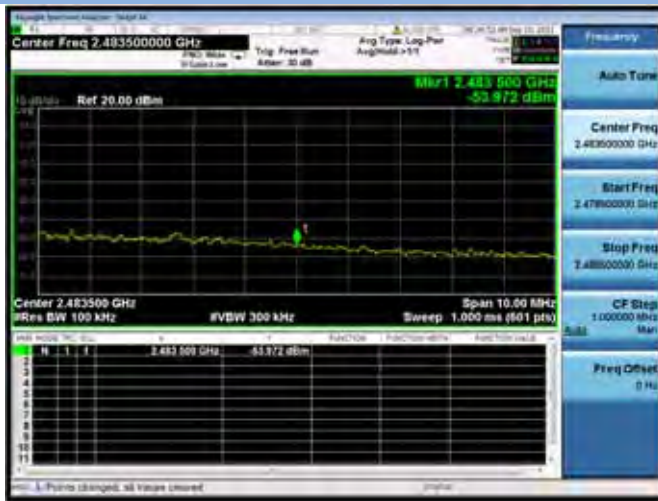


802.11n-20 MHz CHANNEL 11, Reference level

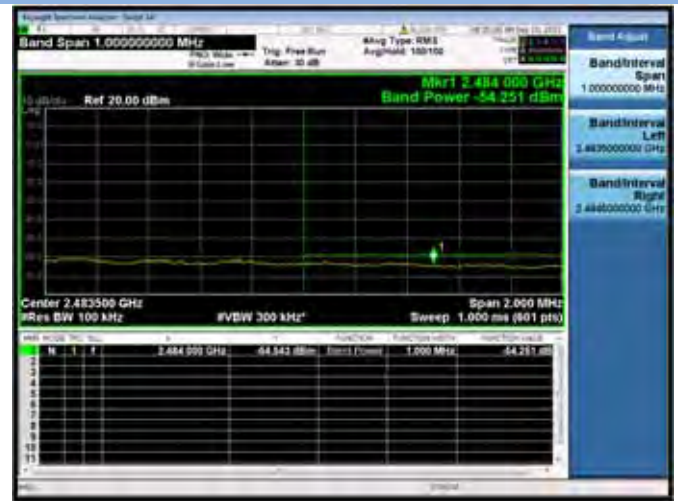


802.11n-40 MHz CHANNEL 3, Carrier level



802.11n-40 MHz CHANNEL 3, Reference level

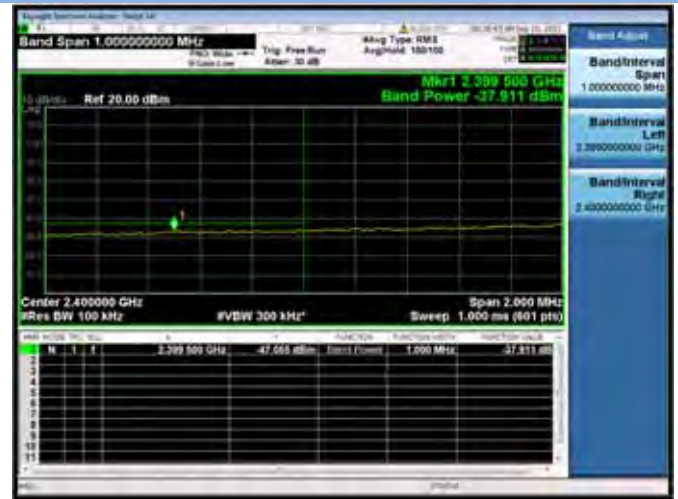


802.11n-40 MHz CHANNEL 4, Carrier level

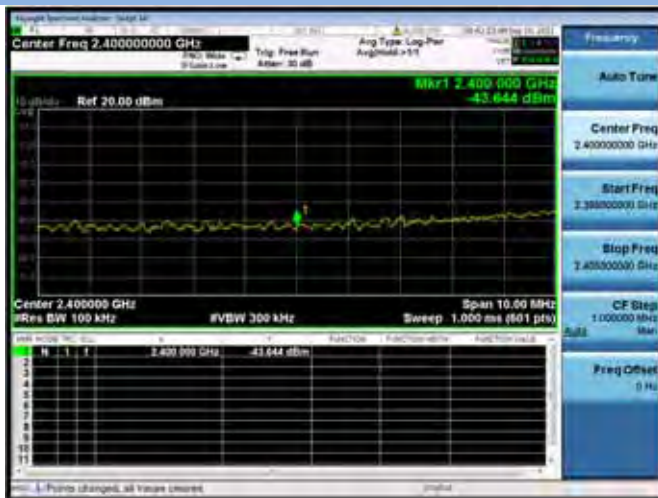


802.11n-40 MHz CHANNEL 4, Reference level




802.11n-40 MHz CHANNEL 5, Carrier level

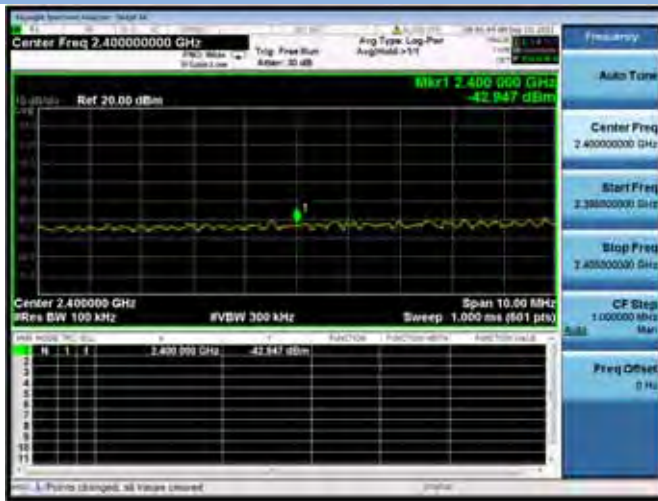


802.11n-40 MHz CHANNEL 5, Reference level

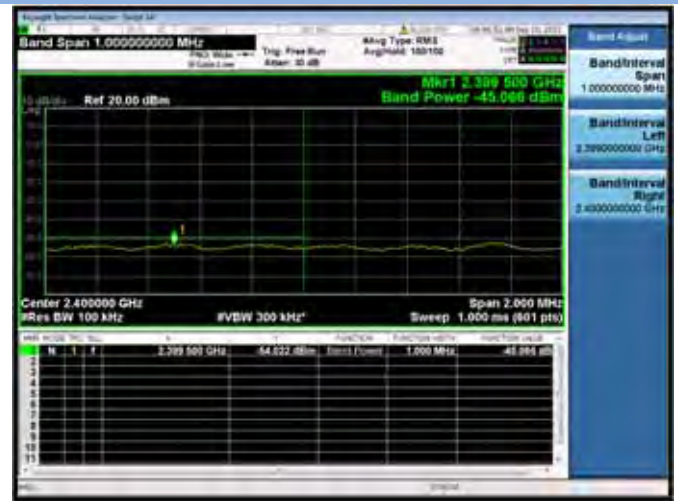

802.11n-40 MHz CHANNEL 9, Carrier level

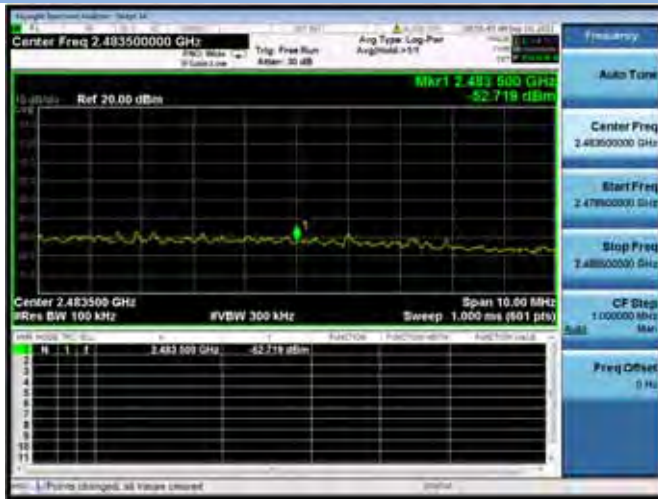

802.11n-40 MHz CHANNEL 9, Reference level

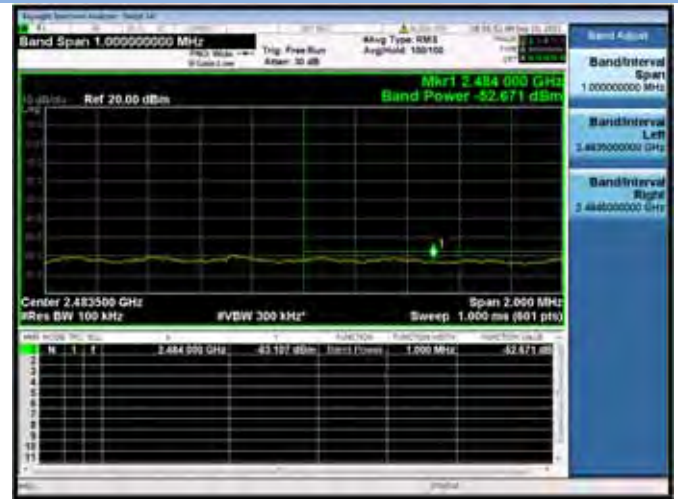


## A.5 Conducted Emissions

Note 1: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

### Test Data and Plots

#### PHASE L


CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

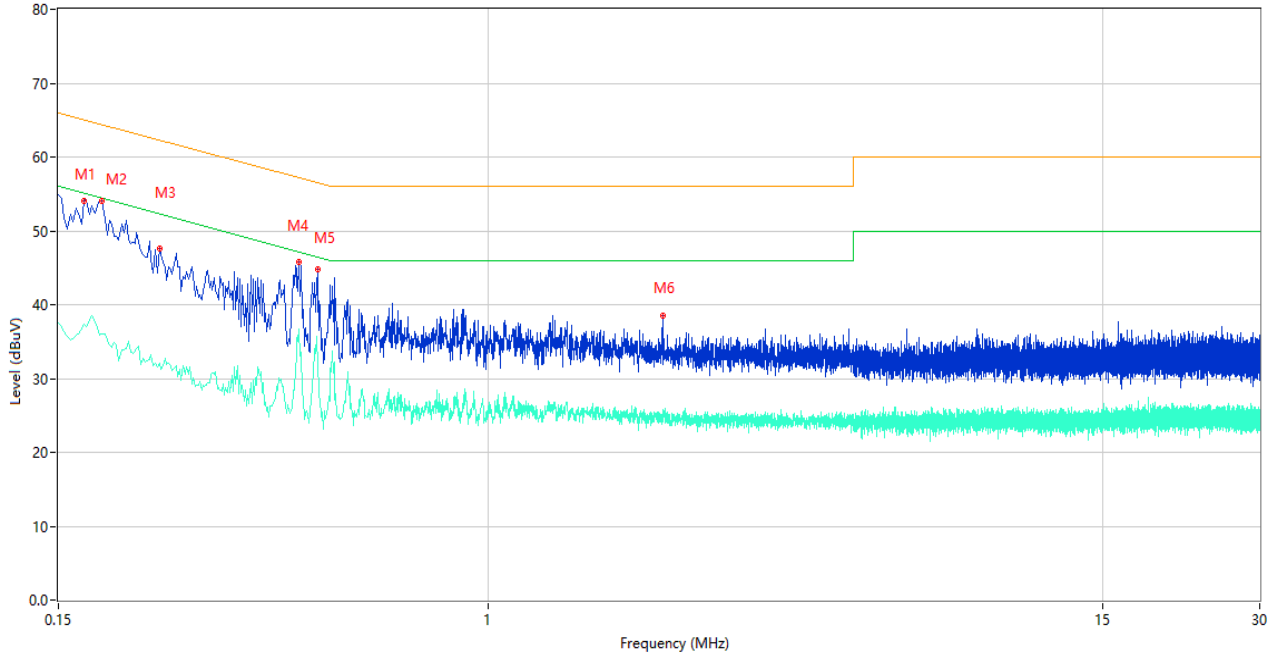

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.168	54.05	10.40	65.06	-11.01	Peak	L	Pass
1**	0.168	37.29	10.40	55.06	-17.77	AV	L	Pass
2	0.182	54.09	10.39	64.39	-10.30	Peak	L	Pass
2**	0.182	35.99	10.39	54.39	-18.40	AV	L	Pass
3	0.234	47.59	10.35	62.31	-14.72	Peak	L	Pass
3**	0.234	32.11	10.35	52.31	-20.20	AV	L	Pass
4	0.434	45.82	10.31	57.18	-11.36	Peak	L	Pass
4**	0.434	36.70	10.31	47.18	-10.48	AV	L	Pass
5	0.472	44.75	10.30	56.48	-11.73	Peak	L	Pass
5**	0.472	32.84	10.30	46.48	-13.64	AV	L	Pass
6	2.154	38.49	10.27	56.00	-17.51	Peak	L	Pass
6**	2.154	24.81	10.27	46.00	-21.19	AV	L	Pass

PHASE N

CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

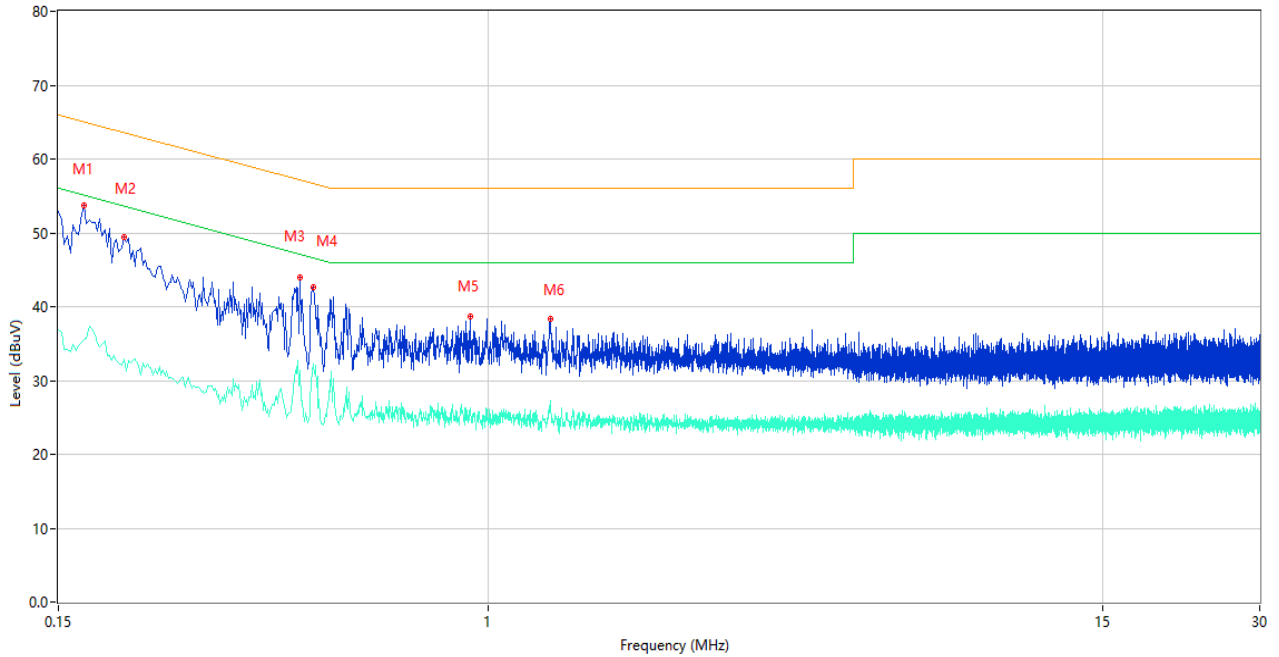

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.168	53.65	10.40	65.06	-11.41	Peak	N	Pass
1**	0.168	35.59	10.40	55.06	-19.47	AV	N	Pass
2	0.200	49.44	10.38	63.61	-14.17	Peak	N	Pass
2**	0.200	32.94	10.38	53.61	-20.67	AV	N	Pass
3	0.436	44.02	10.31	57.14	-13.12	Peak	N	Pass
3**	0.436	31.34	10.31	47.14	-15.80	AV	N	Pass
4	0.462	42.59	10.30	56.66	-14.07	Peak	N	Pass
4**	0.462	32.19	10.30	46.66	-14.47	AV	N	Pass
5	0.924	38.66	10.24	56.00	-17.34	Peak	N	Pass
5**	0.924	26.23	10.24	46.00	-19.77	AV	N	Pass
6	1.316	38.33	10.24	56.00	-17.67	Peak	N	Pass
6**	1.316	25.95	10.24	46.00	-20.05	AV	N	Pass

## A.6 Radiated Emission

Note<sup>1</sup>: The symbol of “--” in the table which means not application.


Note<sup>2</sup>: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note<sup>3</sup>: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note<sup>4</sup>: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.


### Test Data and Plots

#### 30 MHz to 1 GHz, ANT H

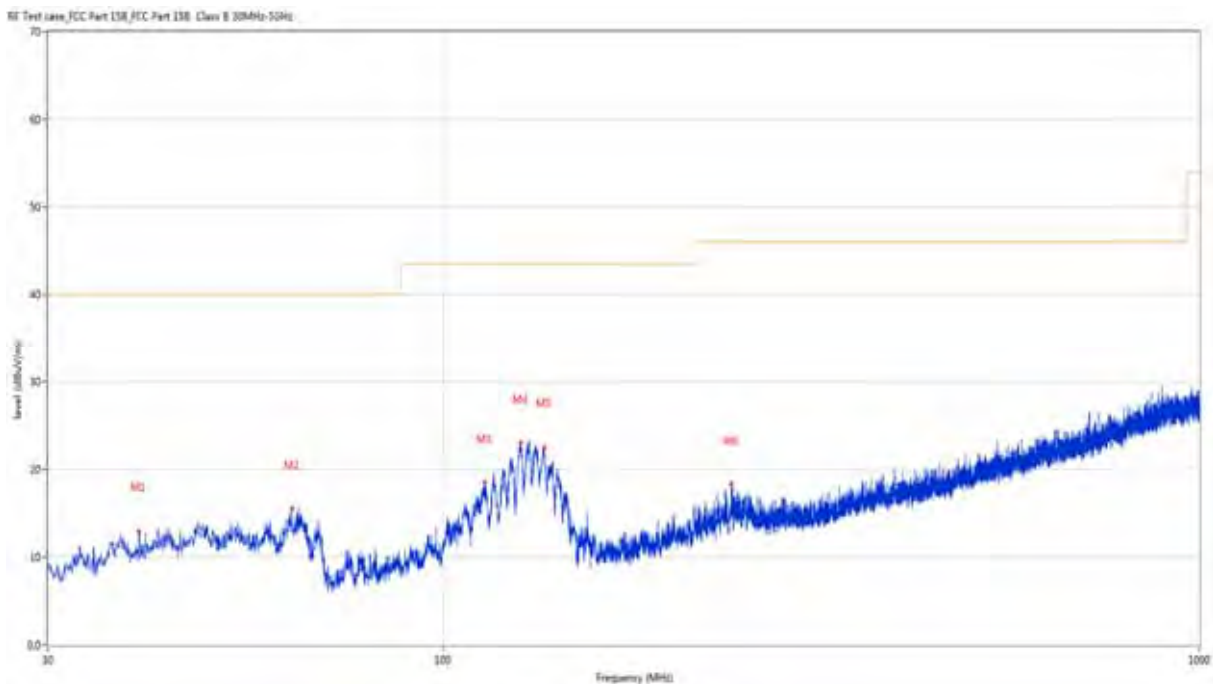

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.603	12.97	-24.27	40.0	-27.03	Peak	263.90	200	Horizontal	Pass
2	63.126	15.62	-24.79	40.0	-24.38	Peak	337.90	100	Horizontal	Pass
3	113.420	18.55	-24.64	43.5	-24.95	Peak	182.40	200	Horizontal	Pass
4	126.563	23.04	-26.82	43.5	-20.46	Peak	0.80	200	Horizontal	Pass
5	135.924	22.53	-27.51	43.5	-20.97	Peak	178.20	200	Horizontal	Pass
6	240.538	18.29	-23.01	46.0	-27.71	Peak	3.60	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

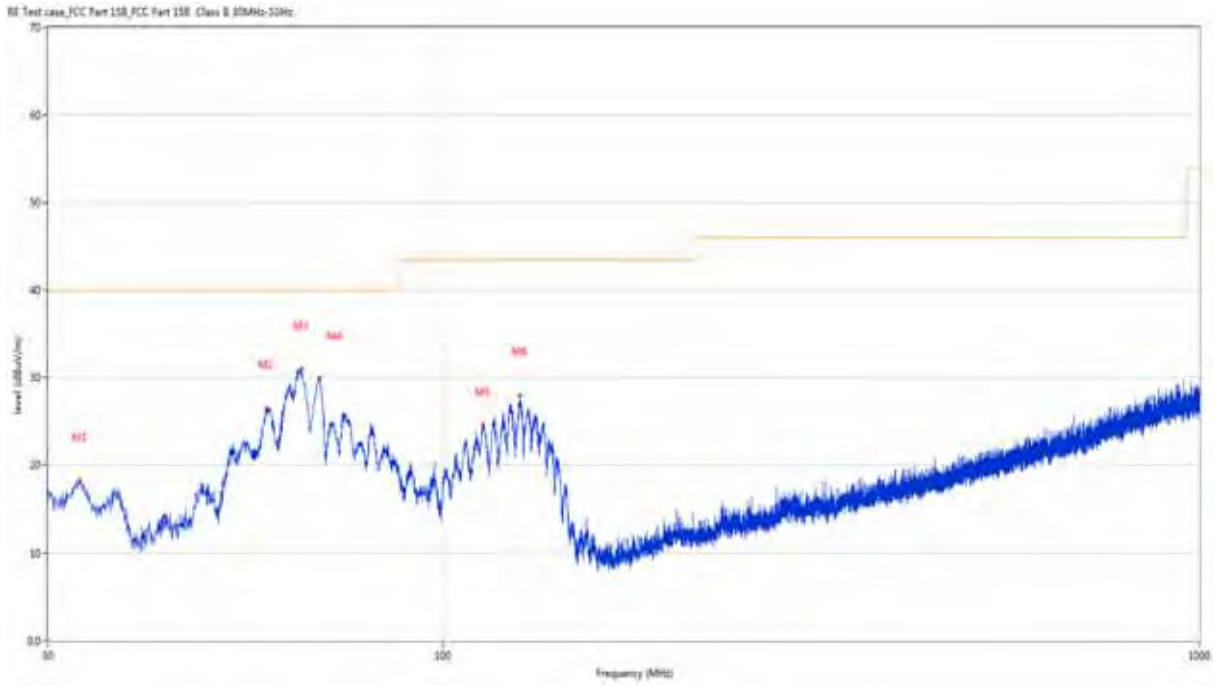

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.056	18.20	-26.36	40.0	-21.80	Peak	81.90	100	Vertical	Pass
2	58.276	26.44	-24.09	40.0	-13.56	Peak	107.30	100	Vertical	Pass
3	64.969	30.95	-25.03	40.0	-9.05	Peak	26.80	100	Vertical	Pass
4	68.655	29.94	-26.25	40.0	-10.06	Peak	338.80	100	Vertical	Pass
5	112.886	24.65	-24.40	43.5	-18.85	Peak	334.60	100	Vertical	Pass
6	126.272	27.86	-26.72	43.5	-15.64	Peak	278.90	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

1 GHz to 18 GHz, ANT H 802.11b Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1722.500	44.05	-16.19	74.0	-29.95	Peak	35.00	150	Horizontal	Pass
1**	1722.500	31.46	-16.19	54.0	-22.54	AV	35.00	150	Horizontal	Pass
2	2411.900	103.62	-11.50	74.0	29.62	Peak	359.00	150	Horizontal	N/A
2**	2411.900	100.13	-11.50	54.0	46.13	AV	359.00	150	Horizontal	N/A
3	4824.250	54.37	0.55	74.0	-19.63	Peak	6.00	150	Horizontal	Pass
3**	4824.250	50.94	0.55	54.0	-3.06	AV	6.00	150	Horizontal	Pass
4	7989.500	57.33	3.06	74.0	-16.67	Peak	92.00	150	Horizontal	Pass
4**	7989.500	47.90	3.06	54.0	-6.10	AV	92.00	150	Horizontal	Pass
5	13853.000	58.13	5.15	74.0	-15.87	Peak	130.00	150	Horizontal	Pass
5**	13853.000	47.18	5.15	54.0	-6.82	AV	130.00	150	Horizontal	Pass
6	17109.500	55.38	3.60	74.0	-18.62	Peak	197.00	150	Horizontal	Pass
6**	17109.500	46.64	3.60	54.0	-7.36	AV	197.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1802.300	44.97	-15.79	74.0	-29.03	Peak	142.00	150	Vertical	Pass
1**	1802.300	31.63	-15.79	54.0	-22.37	AV	142.00	150	Vertical	Pass
2	2410.800	91.28	-11.49	74.0	17.28	Peak	345.00	150	Vertical	N/A
2**	2410.800	88.27	-11.49	54.0	34.27	AV	345.00	150	Vertical	N/A
3	4790.750	53.25	0.77	74.0	-20.75	Peak	28.00	150	Vertical	Pass
3**	4790.750	44.84	0.77	54.0	-9.16	AV	28.00	150	Vertical	Pass
4	7942.750	57.44	3.79	74.0	-16.56	Peak	36.00	150	Vertical	Pass
4**	7942.750	47.69	3.79	54.0	-6.31	AV	36.00	150	Vertical	Pass
5	13809.500	56.77	5.69	74.0	-17.23	Peak	0.00	150	Vertical	Pass
5**	13809.500	48.50	5.69	54.0	-5.50	AV	0.00	150	Vertical	Pass
6	17772.501	55.08	1.65	74.0	-18.92	Peak	120.00	150	Vertical	Pass
6**	17772.501	45.27	1.65	54.0	-8.73	AV	120.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2209.800	49.93	-11.26	74.0	-24.07	Peak	262.00	150	Horizontal	Pass
1**	2209.800	36.56	-11.26	54.0	-17.44	AV	262.00	150	Horizontal	Pass
2	2415.800	104.44	-11.53	74.0	30.44	Peak	360.00	150	Horizontal	N/A
2**	2415.800	101.51	-11.53	54.0	47.51	AV	360.00	150	Horizontal	N/A
3	4834.250	54.05	0.60	74.0	-19.95	Peak	3.00	150	Horizontal	Pass
3**	4834.250	50.74	0.60	54.0	-3.26	AV	3.00	150	Horizontal	Pass
4	7944.500	56.89	3.84	74.0	-17.11	Peak	151.00	150	Horizontal	Pass
4**	7944.500	47.64	3.84	54.0	-6.36	AV	151.00	150	Horizontal	Pass
5	13359.500	56.45	5.17	74.0	-17.55	Peak	287.00	150	Horizontal	Pass
5**	13359.500	47.75	5.17	54.0	-6.25	AV	287.00	150	Horizontal	Pass
6	17080.500	54.73	2.99	74.0	-19.27	Peak	43.00	150	Horizontal	Pass
6**	17080.500	46.78	2.99	54.0	-7.22	AV	43.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1778.200	44.84	-15.88	74.0	-29.16	Peak	0.00	150	Vertical	Pass
1**	1778.200	31.37	-15.88	54.0	-22.63	AV	0.00	150	Vertical	Pass
2	2415.800	92.24	-11.53	74.0	18.24	Peak	206.00	150	Vertical	N/A
2**	2415.800	89.29	-11.53	54.0	35.29	AV	206.00	150	Vertical	N/A
3	4789.500	53.31	0.77	74.0	-20.69	Peak	261.00	150	Vertical	Pass
3**	4789.500	43.62	0.77	54.0	-10.38	AV	261.00	150	Vertical	Pass
4	7936.500	57.06	3.64	74.0	-16.94	Peak	340.00	150	Vertical	Pass
4**	7936.500	47.52	3.64	54.0	-6.48	AV	340.00	150	Vertical	Pass
5	13812.000	56.52	5.66	74.0	-17.48	Peak	85.00	150	Vertical	Pass
5**	13812.000	47.68	5.66	54.0	-6.32	AV	85.00	150	Vertical	Pass
6	17328.001	54.76	1.88	74.0	-19.24	Peak	351.00	150	Vertical	Pass
6**	17328.001	44.98	1.88	54.0	-9.02	AV	351.00	150	Vertical	Pass



## 1 GHz to 18 GHz, ANT H 802.11b Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2031.800	48.11	-13.75	74.0	-25.89	Peak	34.00	150	Horizontal	Pass
1**	2031.800	34.78	-13.75	54.0	-19.22	AV	34.00	150	Horizontal	Pass
2	2420.800	105.08	-11.46	74.0	31.08	Peak	360.00	150	Horizontal	N/A
2**	2420.800	102.19	-11.46	54.0	48.19	AV	360.00	150	Horizontal	N/A
3	4844.500	52.69	0.58	74.0	-21.31	Peak	68.00	150	Horizontal	Pass
3**	4844.500	50.74	0.58	54.0	-3.26	AV	68.00	150	Horizontal	Pass
4	7926.750	56.95	3.54	74.0	-17.05	Peak	232.00	150	Horizontal	Pass
4**	7926.750	48.95	3.54	54.0	-5.05	AV	232.00	150	Horizontal	Pass
5	13367.500	56.61	5.12	74.0	-17.39	Peak	327.00	150	Horizontal	Pass
5**	13367.500	47.58	5.12	54.0	-6.42	AV	327.00	150	Horizontal	Pass
6	17101.500	56.50	3.73	74.0	-17.50	Peak	0.00	150	Horizontal	Pass
6**	17101.500	46.85	3.73	54.0	-7.15	AV	0.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1548.100	43.64	-16.38	74.0	-30.36	Peak	280.00	150	Vertical	Pass
1**	1548.100	30.64	-16.38	54.0	-23.36	AV	280.00	150	Vertical	Pass
2	2420.700	92.64	-11.46	74.0	18.64	Peak	241.00	150	Vertical	N/A
2**	2420.700	89.61	-11.46	54.0	35.61	AV	241.00	150	Vertical	N/A
3	4791.250	53.40	0.77	74.0	-20.60	Peak	345.00	150	Vertical	Pass
3**	4791.250	44.53	0.77	54.0	-9.47	AV	345.00	150	Vertical	Pass
4	7715.000	56.94	3.24	74.0	-17.06	Peak	11.00	150	Vertical	Pass
4**	7715.000	47.73	3.24	54.0	-6.27	AV	11.00	150	Vertical	Pass
5	13334.500	56.96	4.69	74.0	-17.04	Peak	186.00	150	Vertical	Pass
5**	13334.500	47.35	4.69	54.0	-6.65	AV	186.00	150	Vertical	Pass
6	17092.500	55.62	3.46	74.0	-18.38	Peak	253.00	150	Vertical	Pass
6**	17092.500	46.65	3.46	54.0	-7.35	AV	253.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1553.600	43.04	-16.34	74.0	-30.96	Peak	261.00	150	Horizontal	Pass
1**	1553.600	30.44	-16.34	54.0	-23.56	AV	261.00	150	Horizontal	Pass
2	2425.800	106.01	-11.10	74.0	32.01	Peak	355.00	150	Horizontal	N/A
2**	2425.800	103.07	-11.10	54.0	49.07	AV	355.00	150	Horizontal	N/A
3	4854.250	53.92	0.64	74.0	-20.08	Peak	330.00	150	Horizontal	Pass
3**	4854.250	50.00	0.64	54.0	-4.00	AV	330.00	150	Horizontal	Pass
4	7933.500	57.04	3.65	74.0	-16.96	Peak	253.00	150	Horizontal	Pass
4**	7933.500	48.14	3.65	54.0	-5.86	AV	253.00	150	Horizontal	Pass
5	13809.500	57.24	5.69	74.0	-16.76	Peak	89.00	150	Horizontal	Pass
5**	13809.500	47.62	5.69	54.0	-6.38	AV	89.00	150	Horizontal	Pass
6	17107.000	55.31	3.64	74.0	-18.69	Peak	155.00	150	Horizontal	Pass
6**	17107.000	45.89	3.64	54.0	-8.11	AV	155.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.500	45.41	-16.40	74.0	-28.59	Peak	308.00	150	Vertical	Pass
1**	1331.500	30.47	-16.40	54.0	-23.53	AV	308.00	150	Vertical	Pass
2	2425.700	93.42	-11.11	74.0	19.42	Peak	188.00	150	Vertical	N/A
2**	2425.700	90.49	-11.11	54.0	36.49	AV	188.00	150	Vertical	N/A
3	4985.250	53.85	0.94	74.0	-20.15	Peak	20.00	150	Vertical	Pass
3**	4985.250	45.45	0.94	54.0	-8.55	AV	20.00	150	Vertical	Pass
4	7775.500	56.65	3.65	74.0	-17.35	Peak	98.00	150	Vertical	Pass
4**	7775.500	47.04	3.65	54.0	-6.96	AV	98.00	150	Vertical	Pass
5	13805.500	56.94	5.74	74.0	-17.06	Peak	360.00	150	Vertical	Pass
5**	13805.500	47.76	5.74	54.0	-6.24	AV	360.00	150	Vertical	Pass
6	17102.000	55.72	3.72	74.0	-18.28	Peak	18.00	150	Vertical	Pass
6**	17102.000	45.91	3.72	54.0	-8.09	AV	18.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1911.900	46.15	-14.91	74.0	-27.85	Peak	162.00	150	Horizontal	Pass
1**	1911.900	32.94	-14.91	54.0	-21.06	AV	162.00	150	Horizontal	Pass
2	2438.100	104.17	-11.18	74.0	30.17	Peak	354.00	150	Horizontal	N/A
2**	2438.100	101.25	-11.18	54.0	47.25	AV	354.00	150	Horizontal	N/A
3	4777.250	53.82	1.14	74.0	-20.18	Peak	145.00	150	Horizontal	Pass
3**	4777.250	44.21	1.14	54.0	-9.79	AV	145.00	150	Horizontal	Pass
4	7884.750	57.04	3.38	74.0	-16.96	Peak	105.00	150	Horizontal	Pass
4**	7884.750	46.60	3.38	54.0	-7.40	AV	105.00	150	Horizontal	Pass
5	13813.000	56.68	5.65	74.0	-17.32	Peak	210.00	150	Horizontal	Pass
5**	13813.000	47.34	5.65	54.0	-6.66	AV	210.00	150	Horizontal	Pass
6	17096.500	55.16	3.61	74.0	-18.84	Peak	298.00	150	Horizontal	Pass
6**	17096.500	46.05	3.61	54.0	-7.95	AV	298.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1909.100	46.00	-14.81	74.0	-28.00	Peak	214.00	150	Vertical	Pass
1**	1909.100	32.67	-14.81	54.0	-21.33	AV	214.00	150	Vertical	Pass
2	2438.200	93.80	-11.19	74.0	19.80	Peak	355.00	150	Vertical	N/A
2**	2438.200	90.91	-11.19	54.0	36.91	AV	355.00	150	Vertical	N/A
3	4879.500	53.27	0.70	74.0	-20.73	Peak	356.00	150	Vertical	Pass
3**	4879.500	43.53	0.70	54.0	-10.47	AV	356.00	150	Vertical	Pass
4	7636.000	57.10	2.92	74.0	-16.90	Peak	349.00	150	Vertical	Pass
4**	7636.000	46.96	2.92	54.0	-7.04	AV	349.00	150	Vertical	Pass
5	13794.500	56.39	5.56	74.0	-17.61	Peak	150.00	150	Vertical	Pass
5**	13794.500	48.07	5.56	54.0	-5.93	AV	150.00	150	Vertical	Pass
6	17079.000	54.63	2.93	74.0	-19.37	Peak	172.00	150	Vertical	Pass
6**	17079.000	45.28	2.93	54.0	-8.72	AV	172.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1965.300	46.13	-14.37	74.0	-27.87	Peak	211.00	150	Horizontal	Pass
1**	1965.300	32.77	-14.37	54.0	-21.23	AV	211.00	150	Horizontal	Pass
2	2460.200	106.54	-11.48	74.0	32.54	Peak	356.00	150	Horizontal	N/A
2**	2460.200	103.83	-11.48	54.0	49.83	AV	356.00	150	Horizontal	N/A
3	4923.750	53.99	0.70	74.0	-20.01	Peak	12.00	150	Horizontal	Pass
3**	4923.750	46.62	0.70	54.0	-7.38	AV	12.00	150	Horizontal	Pass
4	7998.000	56.78	3.53	74.0	-17.22	Peak	271.00	150	Horizontal	Pass
4**	7998.000	47.71	3.53	54.0	-6.29	AV	271.00	150	Horizontal	Pass
5	13831.000	56.99	5.42	74.0	-17.01	Peak	107.00	150	Horizontal	Pass
5**	13831.000	47.29	5.42	54.0	-6.71	AV	107.00	150	Horizontal	Pass
6	17099.500	55.62	3.73	74.0	-18.38	Peak	107.00	150	Horizontal	Pass
6**	17099.500	46.10	3.73	54.0	-7.90	AV	107.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.300	45.01	-16.39	74.0	-28.99	Peak	300.00	150	Vertical	Pass
1**	1330.300	33.90	-16.39	54.0	-20.10	AV	300.00	150	Vertical	Pass
2	2460.400	95.62	-11.48	74.0	21.62	Peak	351.00	150	Vertical	N/A
2**	2460.400	92.80	-11.48	54.0	38.80	AV	351.00	150	Vertical	N/A
3	5066.750	54.75	0.80	74.0	-19.25	Peak	299.00	150	Vertical	Pass
3**	5066.750	45.21	0.80	54.0	-8.79	AV	299.00	150	Vertical	Pass
4	7843.500	57.01	3.00	74.0	-16.99	Peak	51.00	150	Vertical	Pass
4**	7843.500	47.54	3.00	54.0	-6.46	AV	51.00	150	Vertical	Pass
5	14055.500	57.09	5.29	74.0	-16.91	Peak	320.00	150	Vertical	Pass
5**	14055.500	46.81	5.29	54.0	-7.19	AV	320.00	150	Vertical	Pass
6	17770.000	55.51	1.53	74.0	-18.49	Peak	24.00	150	Vertical	Pass
6**	17770.000	45.11	1.53	54.0	-8.89	AV	24.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1669.900	43.65	-16.27	74.0	-30.35	Peak	26.00	150	Horizontal	Pass
1**	1669.900	30.84	-16.27	54.0	-23.16	AV	26.00	150	Horizontal	Pass
2	2412.300	107.76	-11.51	74.0	33.76	Peak	354.00	150	Horizontal	N/A
2**	2412.300	99.22	-11.51	54.0	45.22	AV	354.00	150	Horizontal	N/A
3	4825.000	54.92	0.57	74.0	-19.08	Peak	28.00	150	Horizontal	Pass
3**	4825.000	46.65	0.57	54.0	-7.35	AV	28.00	150	Horizontal	Pass
4	7767.500	57.03	3.16	74.0	-16.97	Peak	130.00	150	Horizontal	Pass
4**	7767.500	47.03	3.16	54.0	-6.97	AV	130.00	150	Horizontal	Pass
5	13637.000	57.23	5.02	74.0	-16.77	Peak	133.00	150	Horizontal	Pass
5**	13637.000	46.91	5.02	54.0	-7.09	AV	133.00	150	Horizontal	Pass
6	17116.000	54.81	3.49	74.0	-19.19	Peak	166.00	150	Horizontal	Pass
6**	17116.000	46.34	3.49	54.0	-7.66	AV	166.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.600	43.77	-16.45	74.0	-30.23	Peak	360.00	150	Vertical	Pass
1**	1336.600	30.69	-16.45	54.0	-23.31	AV	360.00	150	Vertical	Pass
2	2412.000	96.72	-11.50	74.0	22.72	Peak	346.00	150	Vertical	N/A
2**	2412.000	86.93	-11.50	54.0	32.93	AV	346.00	150	Vertical	N/A
3	4786.250	53.49	0.89	74.0	-20.51	Peak	348.00	150	Vertical	Pass
3**	4786.250	43.72	0.89	54.0	-10.28	AV	348.00	150	Vertical	Pass
4	7724.250	56.63	2.51	74.0	-17.37	Peak	98.00	150	Vertical	Pass
4**	7724.250	46.87	2.51	54.0	-7.13	AV	98.00	150	Vertical	Pass
5	13803.500	57.66	5.77	74.0	-16.34	Peak	205.00	150	Vertical	Pass
5**	13803.500	48.81	5.77	54.0	-5.19	AV	205.00	150	Vertical	Pass
6	17080.001	55.42	2.97	74.0	-18.58	Peak	360.00	150	Vertical	Pass
6**	17080.001	45.72	2.97	54.0	-8.28	AV	360.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2024.500	46.43	-14.08	74.0	-27.57	Peak	86.00	150	Horizontal	Pass
1**	2024.500	33.13	-14.08	54.0	-20.87	AV	86.00	150	Horizontal	Pass
2	2418.600	104.41	-11.57	74.0	30.41	Peak	23.00	150	Horizontal	N/A
2**	2418.600	97.35	-11.57	54.0	43.35	AV	23.00	150	Horizontal	N/A
3	4784.750	53.56	0.94	74.0	-20.44	Peak	239.00	150	Horizontal	Pass
3**	4784.750	43.57	0.94	54.0	-10.43	AV	239.00	150	Horizontal	Pass
4	7791.750	56.68	3.50	74.0	-17.32	Peak	223.00	150	Horizontal	Pass
4**	7791.750	46.84	3.50	54.0	-7.16	AV	223.00	150	Horizontal	Pass
5	13191.000	55.80	3.59	74.0	-18.20	Peak	117.00	150	Horizontal	Pass
5**	13191.000	45.68	3.59	54.0	-8.32	AV	117.00	150	Horizontal	Pass
6	17179.500	54.21	2.34	74.0	-19.79	Peak	298.00	150	Horizontal	Pass
6**	17179.500	44.16	2.34	54.0	-9.84	AV	298.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1731.900	43.48	-16.31	74.0	-30.52	Peak	9.00	100	Vertical	Pass
1**	1731.900	30.11	-16.31	54.0	-23.89	AV	9.00	100	Vertical	Pass
2	2418.500	92.06	-11.57	74.0	18.06	Peak	152.00	100	Vertical	N/A
2**	2418.500	84.89	-11.57	54.0	30.89	AV	152.00	100	Vertical	N/A
3	4704.750	52.44	-0.38	74.0	-21.56	Peak	0.00	100	Vertical	Pass
3**	4704.750	42.80	-0.38	54.0	-11.20	AV	0.00	100	Vertical	Pass
4	7990.750	56.10	3.12	74.0	-17.90	Peak	152.00	100	Vertical	Pass
4**	7990.750	47.13	3.12	54.0	-6.87	AV	152.00	100	Vertical	Pass
5	13340.500	55.50	4.90	74.0	-18.50	Peak	93.00	100	Vertical	Pass
5**	13340.500	46.86	4.90	54.0	-7.14	AV	93.00	100	Vertical	Pass
6	17119.500	54.24	3.43	74.0	-19.76	Peak	48.00	100	Vertical	Pass
6**	17119.500	45.59	3.43	54.0	-8.41	AV	48.00	100	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1972.600	46.47	-14.47	74.0	-27.53	Peak	291.00	150	Horizontal	Pass
1**	1972.600	33.16	-14.47	54.0	-20.84	AV	291.00	150	Horizontal	Pass
2	2443.600	104.51	-11.18	74.0	30.51	Peak	351.00	150	Horizontal	N/A
2**	2443.600	96.90	-11.18	54.0	42.90	AV	351.00	150	Horizontal	N/A
3	4792.500	53.13	0.75	74.0	-20.87	Peak	92.00	150	Horizontal	Pass
3**	4792.500	43.67	0.75	54.0	-10.33	AV	92.00	150	Horizontal	Pass
4	7781.250	57.35	3.79	74.0	-16.65	Peak	360.00	150	Horizontal	Pass
4**	7781.250	47.82	3.79	54.0	-6.18	AV	360.00	150	Horizontal	Pass
5	13584.500	57.14	4.72	74.0	-16.86	Peak	18.00	150	Horizontal	Pass
5**	13584.500	46.91	4.72	54.0	-7.09	AV	18.00	150	Horizontal	Pass
6	17095.500	54.80	3.58	74.0	-19.20	Peak	18.00	150	Horizontal	Pass
6**	17095.500	45.90	3.58	54.0	-8.10	AV	18.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g High Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1725.400	44.83	-16.29	74.0	-29.17	Peak	89.00	150	Vertical	Pass
1**	1725.400	31.01	-16.29	54.0	-22.99	AV	89.00	150	Vertical	Pass
2	2443.700	94.10	-11.18	74.0	20.10	Peak	350.00	150	Vertical	N/A
2**	2443.700	86.56	-11.18	54.0	32.56	AV	350.00	150	Vertical	N/A
3	4915.750	53.46	0.82	74.0	-20.54	Peak	268.00	150	Vertical	Pass
3**	4915.750	44.73	0.82	54.0	-9.27	AV	268.00	150	Vertical	Pass
4	7769.000	56.79	3.35	74.0	-17.21	Peak	152.00	150	Vertical	Pass
4**	7769.000	47.62	3.35	54.0	-6.38	AV	152.00	150	Vertical	Pass
5	13836.500	57.15	5.34	74.0	-16.85	Peak	253.00	150	Vertical	Pass
5**	13836.500	47.87	5.34	54.0	-6.13	AV	253.00	150	Vertical	Pass
6	17067.500	54.81	2.48	74.0	-19.19	Peak	109.00	150	Vertical	Pass
6**	17067.500	45.19	2.48	54.0	-8.81	AV	109.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Channel 10

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1781.500	43.69	-15.91	74.0	-30.31	Peak	320.00	150	Horizontal	Pass
1**	1781.500	30.29	-15.91	54.0	-23.71	AV	320.00	150	Horizontal	Pass
2	2455.000	103.74	-11.55	74.0	29.74	Peak	23.00	150	Horizontal	N/A
2**	2455.000	96.34	-11.55	54.0	42.34	AV	23.00	150	Horizontal	N/A
3	4895.250	53.09	0.47	74.0	-20.91	Peak	159.00	150	Horizontal	Pass
3**	4895.250	42.97	0.47	54.0	-11.03	AV	159.00	150	Horizontal	Pass
4	7766.250	56.31	3.08	74.0	-17.69	Peak	316.00	150	Horizontal	Pass
4**	7766.250	46.31	3.08	54.0	-7.69	AV	316.00	150	Horizontal	Pass
5	14068.500	57.27	4.88	74.0	-16.73	Peak	224.00	150	Horizontal	Pass
5**	14068.500	46.89	4.88	54.0	-7.11	AV	224.00	150	Horizontal	Pass
6	17116.000	54.17	3.49	74.0	-19.83	Peak	147.00	150	Horizontal	Pass
6**	17116.000	44.88	3.49	54.0	-9.12	AV	147.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Channel 10

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1848.600	44.48	-15.07	74.0	-29.52	Peak	26.00	150	Vertical	Pass
1**	1848.600	31.85	-15.07	54.0	-22.15	AV	26.00	150	Vertical	Pass
2	2455.700	91.59	-11.47	74.0	17.59	Peak	290.00	150	Vertical	N/A
2**	2455.700	84.33	-11.47	54.0	30.33	AV	290.00	150	Vertical	N/A
3	4981.000	53.79	0.87	74.0	-20.21	Peak	200.00	150	Vertical	Pass
3**	4981.000	44.26	0.87	54.0	-9.74	AV	200.00	150	Vertical	Pass
4	7926.750	56.71	3.54	74.0	-17.29	Peak	138.00	150	Vertical	Pass
4**	7926.750	47.14	3.54	54.0	-6.86	AV	138.00	150	Vertical	Pass
5	13342.500	55.88	4.97	74.0	-18.12	Peak	63.00	150	Vertical	Pass
5**	13342.500	48.04	4.97	54.0	-5.96	AV	63.00	150	Vertical	Pass
6	17095.999	54.07	3.60	74.0	-19.93	Peak	169.00	150	Vertical	Pass
6**	17095.999	45.55	3.60	54.0	-8.45	AV	169.00	150	Vertical	Pass



1 GHz to 18 GHz, ANT H 802.11g Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1776.800	43.93	-15.75	74.0	-30.07	Peak	71.00	150	Horizontal	Pass
1**	1776.800	32.14	-15.75	54.0	-21.86	AV	71.00	150	Horizontal	Pass
2	2457.500	107.72	-11.42	74.0	33.72	Peak	360.00	150	Horizontal	N/A
2**	2457.500	100.57	-11.42	54.0	46.57	AV	360.00	150	Horizontal	N/A
3	4796.750	53.37	0.83	74.0	-20.63	Peak	128.00	150	Horizontal	Pass
3**	4796.750	43.54	0.83	54.0	-10.46	AV	128.00	150	Horizontal	Pass
4	7457.000	57.81	2.04	74.0	-16.19	Peak	221.00	150	Horizontal	Pass
4**	7457.000	46.95	2.04	54.0	-7.05	AV	221.00	150	Horizontal	Pass
5	13629.000	57.77	4.96	74.0	-16.23	Peak	264.00	150	Horizontal	Pass
5**	13629.000	47.22	4.96	54.0	-6.78	AV	264.00	150	Horizontal	Pass
6	17113.000	55.21	3.54	74.0	-18.79	Peak	360.00	150	Horizontal	Pass
6**	17113.000	45.53	3.54	54.0	-8.47	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.200	44.92	-16.39	74.0	-29.08	Peak	310.00	150	Vertical	Pass
1**	1330.200	31.08	-16.39	54.0	-22.92	AV	310.00	150	Vertical	Pass
2	2457.300	95.63	-11.41	74.0	21.63	Peak	358.00	150	Vertical	N/A
2**	2457.300	88.17	-11.41	54.0	34.17	AV	358.00	150	Vertical	N/A
3	4833.250	52.87	0.66	74.0	-21.13	Peak	74.00	150	Vertical	Pass
3**	4833.250	44.06	0.66	54.0	-9.94	AV	74.00	150	Vertical	Pass
4	7942.500	57.76	3.78	74.0	-16.24	Peak	333.00	150	Vertical	Pass
4**	7942.500	48.84	3.78	54.0	-5.16	AV	333.00	150	Vertical	Pass
5	14034.000	56.63	4.70	74.0	-17.37	Peak	217.00	150	Vertical	Pass
5**	14034.000	47.00	4.70	54.0	-7.00	AV	217.00	150	Vertical	Pass
6	17126.000	54.76	3.33	74.0	-19.24	Peak	107.00	150	Vertical	Pass
6**	17126.000	46.08	3.33	54.0	-7.92	AV	107.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1844.900	44.51	-15.07	74.0	-29.49	Peak	109.00	150	Horizontal	Pass
1**	1844.900	32.17	-15.07	54.0	-21.83	AV	109.00	150	Horizontal	Pass
2	2415.700	106.65	-11.53	74.0	32.65	Peak	357.00	150	Horizontal	N/A
2**	2415.700	98.79	-11.53	54.0	44.79	AV	357.00	150	Horizontal	N/A
3	4821.000	53.51	0.65	74.0	-20.49	Peak	22.00	150	Horizontal	Pass
3**	4821.000	44.67	0.65	54.0	-9.33	AV	22.00	150	Horizontal	Pass
4	7947.750	56.88	3.85	74.0	-17.12	Peak	271.00	150	Horizontal	Pass
4**	7947.750	47.78	3.85	54.0	-6.22	AV	271.00	150	Horizontal	Pass
5	13800.500	57.31	5.81	74.0	-16.69	Peak	206.00	150	Horizontal	Pass
5**	13800.500	47.93	5.81	54.0	-6.07	AV	206.00	150	Horizontal	Pass
6	17122.000	54.95	3.39	74.0	-19.05	Peak	151.00	150	Horizontal	Pass
6**	17122.000	45.68	3.39	54.0	-8.32	AV	151.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1770.300	44.20	-15.90	74.0	-29.80	Peak	183.00	150	Vertical	Pass
1**	1770.300	32.59	-15.90	54.0	-21.41	AV	183.00	150	Vertical	Pass
2	2408.000	94.34	-11.24	74.0	20.34	Peak	342.00	150	Vertical	N/A
2**	2408.000	86.95	-11.24	54.0	32.95	AV	342.00	150	Vertical	N/A
3	4837.750	53.43	0.56	74.0	-20.57	Peak	114.00	150	Vertical	Pass
3**	4837.750	43.61	0.56	54.0	-10.39	AV	114.00	150	Vertical	Pass
4	7919.500	56.64	3.47	74.0	-17.36	Peak	82.00	150	Vertical	Pass
4**	7919.500	48.12	3.47	54.0	-5.88	AV	82.00	150	Vertical	Pass
5	13347.500	56.73	5.14	74.0	-17.27	Peak	342.00	150	Vertical	Pass
5**	13347.500	48.63	5.14	54.0	-5.37	AV	342.00	150	Vertical	Pass
6	17789.999	56.52	2.45	74.0	-17.48	Peak	230.00	150	Vertical	Pass
6**	17789.999	45.98	2.45	54.0	-8.02	AV	230.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1834.600	44.07	-15.41	74.0	-29.93	Peak	278.00	150	Horizontal	Pass
1**	1834.600	31.12	-15.41	54.0	-22.88	AV	278.00	150	Horizontal	Pass
2	2419.800	102.13	-11.51	74.0	28.13	Peak	30.00	150	Horizontal	N/A
2**	2419.800	94.73	-11.51	54.0	40.73	AV	30.00	150	Horizontal	N/A
3	4780.000	52.67	1.04	74.0	-21.33	Peak	247.00	150	Horizontal	Pass
3**	4780.000	43.97	1.04	54.0	-10.03	AV	247.00	150	Horizontal	Pass
4	7781.750	56.07	3.81	74.0	-17.93	Peak	285.00	150	Horizontal	Pass
4**	7781.750	47.63	3.81	54.0	-6.37	AV	285.00	150	Horizontal	Pass
5	13358.500	56.03	5.18	74.0	-17.97	Peak	32.00	150	Horizontal	Pass
5**	13358.500	47.05	5.18	54.0	-6.95	AV	32.00	150	Horizontal	Pass
6	17098.500	54.79	3.69	74.0	-19.21	Peak	78.00	150	Horizontal	Pass
6**	17098.500	46.42	3.69	54.0	-7.58	AV	78.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1850.100	44.14	-15.04	74.0	-29.86	Peak	122.00	150	Vertical	Pass
1**	1850.100	31.85	-15.04	54.0	-22.15	AV	122.00	150	Vertical	Pass
2	2418.600	90.86	-11.57	74.0	16.86	Peak	215.00	150	Vertical	N/A
2**	2418.600	83.33	-11.57	54.0	29.33	AV	215.00	150	Vertical	N/A
3	4790.750	52.89	0.77	74.0	-21.11	Peak	213.00	150	Vertical	Pass
3**	4790.750	42.94	0.77	54.0	-11.06	AV	213.00	150	Vertical	Pass
4	7777.750	56.00	3.69	74.0	-18.00	Peak	261.00	150	Vertical	Pass
4**	7777.750	46.76	3.69	54.0	-7.24	AV	261.00	150	Vertical	Pass
5	14045.000	56.42	5.22	74.0	-17.58	Peak	357.00	150	Vertical	Pass
5**	14045.000	46.95	5.22	54.0	-7.05	AV	357.00	150	Vertical	Pass
6	17804.501	54.62	2.76	74.0	-19.38	Peak	342.00	150	Vertical	Pass
6**	17804.501	46.23	2.76	54.0	-7.77	AV	342.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1525.100	43.44	-16.37	74.0	-30.56	Peak	204.00	150	Horizontal	Pass
1**	1525.100	30.65	-16.37	54.0	-23.35	AV	204.00	150	Horizontal	Pass
2	2444.100	103.01	-11.19	74.0	29.01	Peak	354.00	150	Horizontal	N/A
2**	2444.100	95.47	-11.19	54.0	41.47	AV	354.00	150	Horizontal	N/A
3	5061.000	53.70	0.60	74.0	-20.30	Peak	232.00	150	Horizontal	Pass
3**	5061.000	45.20	0.60	54.0	-8.80	AV	232.00	150	Horizontal	Pass
4	7785.250	56.97	3.77	74.0	-17.03	Peak	216.00	150	Horizontal	Pass
4**	7785.250	47.55	3.77	54.0	-6.45	AV	216.00	150	Horizontal	Pass
5	14057.500	57.10	5.23	74.0	-16.90	Peak	107.00	150	Horizontal	Pass
5**	14057.500	47.60	5.23	54.0	-6.40	AV	107.00	150	Horizontal	Pass
6	17106.500	55.14	3.65	74.0	-18.86	Peak	0.00	150	Horizontal	Pass
6**	17106.500	45.59	3.65	54.0	-8.41	AV	0.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1695.400	44.15	-16.27	74.0	-29.85	Peak	17.00	150	Vertical	Pass
1**	1695.400	31.02	-16.27	54.0	-22.98	AV	17.00	150	Vertical	Pass
2	2444.300	91.90	-11.20	74.0	17.90	Peak	355.00	150	Vertical	N/A
2**	2444.300	84.74	-11.20	54.0	30.74	AV	355.00	150	Vertical	N/A
3	5043.750	54.02	0.39	74.0	-19.98	Peak	35.00	150	Vertical	Pass
3**	5043.750	44.30	0.39	54.0	-9.70	AV	35.00	150	Vertical	Pass
4	7781.750	56.83	3.81	74.0	-17.17	Peak	339.00	150	Vertical	Pass
4**	7781.750	47.68	3.81	54.0	-6.32	AV	339.00	150	Vertical	Pass
5	13375.000	56.66	5.07	74.0	-17.34	Peak	186.00	150	Vertical	Pass
5**	13375.000	48.06	5.07	54.0	-5.94	AV	186.00	150	Vertical	Pass
6	17117.000	55.25	3.47	74.0	-18.75	Peak	298.00	150	Vertical	Pass
6**	17117.000	46.01	3.47	54.0	-7.99	AV	298.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Channel 10

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1946.000	45.15	-14.47	74.0	-28.85	Peak	22.00	150	Horizontal	Pass
1**	1946.000	32.12	-14.47	54.0	-21.88	AV	22.00	150	Horizontal	Pass
2	2454.800	101.95	-11.57	74.0	27.95	Peak	31.00	150	Horizontal	N/A
2**	2454.800	95.00	-11.57	54.0	41.00	AV	31.00	150	Horizontal	N/A
3	4789.250	52.60	0.78	74.0	-21.40	Peak	176.00	150	Horizontal	Pass
3**	4789.250	43.46	0.78	54.0	-10.54	AV	176.00	150	Horizontal	Pass
4	7612.250	56.59	2.71	74.0	-17.41	Peak	74.00	150	Horizontal	Pass
4**	7612.250	45.93	2.71	54.0	-8.07	AV	74.00	150	Horizontal	Pass
5	12009.000	55.23	2.36	74.0	-18.77	Peak	131.00	150	Horizontal	Pass
5**	12009.000	44.83	2.36	54.0	-9.17	AV	131.00	150	Horizontal	Pass
6	13611.000	56.81	4.80	74.0	-17.19	Peak	192.00	150	Horizontal	Pass
6**	13611.000	46.95	4.80	54.0	-7.05	AV	192.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Channel 10

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1637.700	43.20	-16.37	74.0	-30.80	Peak	360.00	150	Vertical	Pass
1**	1637.700	30.25	-16.37	54.0	-23.75	AV	360.00	150	Vertical	Pass
2	2455.200	89.94	-11.53	74.0	15.94	Peak	291.00	150	Vertical	N/A
2**	2455.200	82.31	-11.53	54.0	28.31	AV	291.00	150	Vertical	N/A
3	4765.750	52.49	0.34	74.0	-21.51	Peak	317.00	150	Vertical	Pass
3**	4765.750	42.73	0.34	54.0	-11.27	AV	317.00	150	Vertical	Pass
4	7160.750	56.49	1.74	74.0	-17.51	Peak	0.00	150	Vertical	Pass
4**	7160.750	46.02	1.74	54.0	-7.98	AV	0.00	150	Vertical	Pass
5	11218.500	54.61	2.08	74.0	-19.39	Peak	15.00	150	Vertical	Pass
5**	11218.500	44.12	2.08	54.0	-9.88	AV	15.00	150	Vertical	Pass
6	13376.500	55.76	5.06	74.0	-18.24	Peak	334.00	150	Vertical	Pass
6**	13376.500	46.87	5.06	54.0	-7.13	AV	334.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1463.700	43.10	-16.18	74.0	-30.90	Peak	266.00	150	Horizontal	Pass
1**	1463.700	29.97	-16.18	54.0	-24.03	AV	266.00	150	Horizontal	Pass
2	2457.300	109.79	-11.41	74.0	35.79	Peak	359.00	150	Horizontal	N/A
2**	2457.300	102.77	-11.41	54.0	48.77	AV	359.00	150	Horizontal	N/A
3	3816.250	49.90	-3.28	74.0	-24.10	Peak	0.00	150	Horizontal	Pass
3**	3816.250	40.87	-3.28	54.0	-13.13	AV	0.00	150	Horizontal	Pass
4	7408.500	56.84	3.18	74.0	-17.16	Peak	160.00	150	Horizontal	Pass
4**	7408.500	47.30	3.18	54.0	-6.70	AV	160.00	150	Horizontal	Pass
5	9356.500	55.39	2.09	74.0	-18.61	Peak	0.00	150	Horizontal	Pass
5**	9356.500	45.48	2.09	54.0	-8.52	AV	0.00	150	Horizontal	Pass
6	14294.500	56.31	4.97	74.0	-17.69	Peak	286.00	150	Horizontal	Pass
6**	14294.500	47.34	4.97	54.0	-6.66	AV	286.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1632.500	43.44	-16.48	74.0	-30.56	Peak	176.00	150	Vertical	Pass
1**	1632.500	32.04	-16.48	54.0	-21.96	AV	176.00	150	Vertical	Pass
2	2454.400	94.25	-11.61	74.0	20.25	Peak	13.00	150	Vertical	N/A
2**	2454.400	87.21	-11.61	54.0	33.21	AV	13.00	150	Vertical	N/A
3	4937.500	53.69	0.98	74.0	-20.31	Peak	341.00	150	Vertical	Pass
3**	4937.500	44.36	0.98	54.0	-9.64	AV	341.00	150	Vertical	Pass
4	7920.250	56.63	3.46	74.0	-17.37	Peak	223.00	150	Vertical	Pass
4**	7920.250	48.54	3.46	54.0	-5.46	AV	223.00	150	Vertical	Pass
5	13138.000	56.64	4.11	74.0	-17.36	Peak	95.00	150	Vertical	Pass
5**	13138.000	46.31	4.11	54.0	-7.69	AV	95.00	150	Vertical	Pass
6	17111.500	55.37	3.56	74.0	-18.63	Peak	204.00	150	Vertical	Pass
6**	17111.500	46.38	3.56	54.0	-7.62	AV	204.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1444.200	44.08	-16.26	74.0	-29.92	Peak	52.00	150	Horizontal	Pass
1**	1444.200	30.51	-16.26	54.0	-23.49	AV	52.00	150	Horizontal	Pass
2	2410.200	102.32	-11.49	74.0	28.32	Peak	349.00	150	Horizontal	N/A
2**	2410.200	93.67	-11.49	54.0	39.67	AV	349.00	150	Horizontal	N/A
3	3990.750	50.48	-2.79	74.0	-23.52	Peak	278.00	150	Horizontal	Pass
3**	3990.750	40.20	-2.79	54.0	-13.80	AV	278.00	150	Horizontal	Pass
4	6879.250	58.04	2.38	74.0	-15.96	Peak	301.00	150	Horizontal	Pass
4**	6879.250	48.92	2.38	54.0	-5.08	AV	301.00	150	Horizontal	Pass
5	11292.500	54.81	2.31	74.0	-19.19	Peak	260.00	150	Horizontal	Pass
5**	11292.500	45.78	2.31	54.0	-8.22	AV	260.00	150	Horizontal	Pass
6	17098.500	54.90	3.69	74.0	-19.10	Peak	360.00	150	Horizontal	Pass
6**	17098.500	45.99	3.69	54.0	-8.01	AV	360.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1419.800	42.85	-16.26	74.0	-31.15	Peak	296.00	150	Vertical	Pass
1**	1419.800	30.13	-16.26	54.0	-23.87	AV	296.00	150	Vertical	Pass
2	2413.700	89.52	-11.55	74.0	15.52	Peak	222.00	150	Vertical	N/A
2**	2413.700	82.08	-11.55	54.0	28.08	AV	222.00	150	Vertical	N/A
3	4779.000	53.60	1.05	74.0	-20.40	Peak	248.00	150	Vertical	Pass
3**	4779.000	43.36	1.05	54.0	-10.64	AV	248.00	150	Vertical	Pass
4	7921.500	57.48	3.45	74.0	-16.52	Peak	162.00	150	Vertical	Pass
4**	7921.500	47.58	3.45	54.0	-6.42	AV	162.00	150	Vertical	Pass
5	13382.500	56.12	5.02	74.0	-17.88	Peak	32.00	150	Vertical	Pass
5**	13382.500	48.07	5.02	54.0	-5.93	AV	32.00	150	Vertical	Pass
6	17137.500	55.40	3.14	74.0	-18.60	Peak	131.00	150	Vertical	Pass
6**	17137.500	46.57	3.14	54.0	-7.43	AV	131.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1616.200	43.72	-16.46	74.0	-30.28	Peak	321.00	150	Horizontal	Pass
1**	1616.200	30.13	-16.46	54.0	-23.87	AV	321.00	150	Horizontal	Pass
2	2421.700	101.20	-11.40	74.0	27.20	Peak	31.00	150	Horizontal	N/A
2**	2421.700	93.70	-11.40	54.0	39.70	AV	31.00	150	Horizontal	N/A
3	4999.500	53.34	0.47	74.0	-20.66	Peak	318.00	150	Horizontal	Pass
3**	4999.500	44.90	0.47	54.0	-9.10	AV	318.00	150	Horizontal	Pass
4	7784.500	56.21	3.76	74.0	-17.79	Peak	82.00	150	Horizontal	Pass
4**	7784.500	48.05	3.76	54.0	-5.95	AV	82.00	150	Horizontal	Pass
5	13808.000	56.29	5.71	74.0	-17.71	Peak	321.00	150	Horizontal	Pass
5**	13808.000	46.80	5.71	54.0	-7.20	AV	321.00	150	Horizontal	Pass
6	17104.000	55.82	3.69	74.0	-18.18	Peak	213.00	150	Horizontal	Pass
6**	17104.000	45.24	3.69	54.0	-8.76	AV	213.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1408.800	42.91	-16.13	74.0	-31.09	Peak	133.00	150	Vertical	Pass
1**	1408.800	29.09	-16.13	54.0	-24.91	AV	133.00	150	Vertical	Pass
2	2419.900	89.12	-11.51	74.0	15.12	Peak	215.00	150	Vertical	N/A
2**	2419.900	81.99	-11.51	54.0	27.99	AV	215.00	150	Vertical	N/A
3	4784.500	52.61	0.95	74.0	-21.39	Peak	325.00	150	Vertical	Pass
3**	4784.500	43.40	0.95	54.0	-10.60	AV	325.00	150	Vertical	Pass
4	7785.500	56.08	3.77	74.0	-17.92	Peak	19.00	150	Vertical	Pass
4**	7785.500	47.12	3.77	54.0	-6.88	AV	19.00	150	Vertical	Pass
5	12711.000	55.92	3.40	74.0	-18.08	Peak	115.00	150	Vertical	Pass
5**	12711.000	44.86	3.40	54.0	-9.14	AV	115.00	150	Vertical	Pass
6	17132.500	54.72	3.22	74.0	-19.28	Peak	115.00	150	Vertical	Pass
6**	17132.500	44.40	3.22	54.0	-9.60	AV	115.00	150	Vertical	Pass



## 1 GHz to 18 GHz, ANT H 802.11n40 Channel 5

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1854.000	44.16	-15.16	74.0	-29.84	Peak	360.00	150	Horizontal	Pass
1**	1854.000	31.81	-15.16	54.0	-22.19	AV	360.00	150	Horizontal	Pass
2	2420.600	100.22	-11.47	74.0	26.22	Peak	27.00	150	Horizontal	N/A
2**	2420.600	92.58	-11.47	54.0	38.58	AV	27.00	150	Horizontal	N/A
3	4791.750	52.36	0.77	74.0	-21.64	Peak	43.00	150	Horizontal	Pass
3**	4791.750	44.74	0.77	54.0	-9.26	AV	43.00	150	Horizontal	Pass
4	7960.000	56.38	3.25	74.0	-17.62	Peak	168.00	150	Horizontal	Pass
4**	7960.000	46.47	3.25	54.0	-7.53	AV	168.00	150	Horizontal	Pass
5	13424.500	56.36	4.60	74.0	-17.64	Peak	56.00	150	Horizontal	Pass
5**	13424.500	46.13	4.60	54.0	-7.87	AV	56.00	150	Horizontal	Pass
6	17136.000	54.16	3.16	74.0	-19.84	Peak	0.00	150	Horizontal	Pass
6**	17136.000	44.25	3.16	54.0	-9.75	AV	0.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Channel 5

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1841.300	44.76	-15.25	74.0	-29.24	Peak	360.00	150	Vertical	Pass
1**	1841.300	31.96	-15.25	54.0	-22.04	AV	360.00	150	Vertical	Pass
2	2422.200	87.92	-11.37	74.0	13.92	Peak	211.00	150	Vertical	N/A
2**	2422.200	80.98	-11.37	54.0	26.98	AV	211.00	150	Vertical	N/A
3	4919.750	52.52	0.81	74.0	-21.48	Peak	360.00	150	Vertical	Pass
3**	4919.750	43.37	0.81	54.0	-10.63	AV	360.00	150	Vertical	Pass
4	7496.500	56.45	2.39	74.0	-17.55	Peak	28.00	150	Vertical	Pass
4**	7496.500	45.74	2.39	54.0	-8.26	AV	28.00	150	Vertical	Pass
5	13362.500	56.80	5.15	74.0	-17.20	Peak	229.00	150	Vertical	Pass
5**	13362.500	46.72	5.15	54.0	-7.28	AV	229.00	150	Vertical	Pass
6	17097.500	54.26	3.65	74.0	-19.74	Peak	122.00	150	Vertical	Pass
6**	17097.500	45.69	3.65	54.0	-8.31	AV	122.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2201.400	50.33	-11.32	74.0	-23.67	Peak	354.00	150	Horizontal	Pass
1**	2201.400	37.63	-11.32	54.0	-16.37	AV	354.00	150	Horizontal	Pass
2	2449.400	99.61	-11.58	74.0	25.61	Peak	346.00	150	Horizontal	N/A
2**	2449.400	92.70	-11.58	54.0	38.70	AV	346.00	150	Horizontal	N/A
3	5569.000	54.90	1.51	74.0	-19.10	Peak	339.00	150	Horizontal	Pass
3**	5569.000	45.04	1.51	54.0	-8.96	AV	339.00	150	Horizontal	Pass
4	7766.750	56.81	3.08	74.0	-17.19	Peak	230.00	150	Horizontal	Pass
4**	7766.750	46.83	3.08	54.0	-7.17	AV	230.00	150	Horizontal	Pass
5	11175.000	54.18	1.51	74.0	-19.82	Peak	66.00	150	Horizontal	Pass
5**	11175.000	45.67	1.51	54.0	-8.33	AV	66.00	150	Horizontal	Pass
6	17837.001	56.11	1.63	74.0	-17.89	Peak	353.00	150	Horizontal	Pass
6**	17837.001	45.50	1.63	54.0	-8.50	AV	353.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.300	44.30	-16.39	74.0	-29.70	Peak	136.00	150	Vertical	Pass
1**	1329.300	30.38	-16.39	54.0	-23.62	AV	136.00	150	Vertical	Pass
2	2451.400	88.38	-11.60	74.0	14.38	Peak	8.00	150	Vertical	N/A
2**	2451.400	80.68	-11.60	54.0	26.68	AV	8.00	150	Vertical	N/A
3	5389.500	54.02	1.26	74.0	-19.98	Peak	0.00	150	Vertical	Pass
3**	5389.500	45.53	1.26	54.0	-8.47	AV	0.00	150	Vertical	Pass
4	7937.250	57.23	3.65	74.0	-16.77	Peak	23.00	150	Vertical	Pass
4**	7937.250	48.64	3.65	54.0	-5.36	AV	23.00	150	Vertical	Pass
5	11305.500	54.57	2.24	74.0	-19.43	Peak	263.00	150	Vertical	Pass
5**	11305.500	46.55	2.24	54.0	-7.45	AV	263.00	150	Vertical	Pass
6	17781.500	55.74	2.06	74.0	-18.26	Peak	152.00	150	Vertical	Pass
6**	17781.500	45.40	2.06	54.0	-8.60	AV	152.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1985.300	46.74	-14.43	74.0	-27.26	Peak	210.00	150	Horizontal	Pass
1**	1985.300	33.56	-14.43	54.0	-20.44	AV	210.00	150	Horizontal	Pass
2	2454.500	99.28	-11.60	74.0	25.28	Peak	352.00	150	Horizontal	N/A
2**	2454.500	92.21	-11.60	54.0	38.21	AV	352.00	150	Horizontal	N/A
3	5423.750	54.83	0.92	74.0	-19.17	Peak	178.00	150	Horizontal	Pass
3**	5423.750	44.88	0.92	54.0	-9.12	AV	178.00	150	Horizontal	Pass
4	7999.500	56.49	3.74	74.0	-17.51	Peak	209.00	150	Horizontal	Pass
4**	7999.500	48.06	3.74	54.0	-5.94	AV	209.00	150	Horizontal	Pass
5	11293.500	55.95	2.32	74.0	-18.05	Peak	7.00	150	Horizontal	Pass
5**	11293.500	46.07	2.32	54.0	-7.93	AV	7.00	150	Horizontal	Pass
6	17097.000	55.41	3.63	74.0	-18.59	Peak	7.00	150	Horizontal	Pass
6**	17097.000	46.01	3.63	54.0	-7.99	AV	7.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1596.800	44.03	-16.44	74.0	-29.97	Peak	263.00	150	Vertical	Pass
1**	1596.800	30.94	-16.44	54.0	-23.06	AV	263.00	150	Vertical	Pass
2	2449.200	87.74	-11.57	74.0	13.74	Peak	5.00	150	Vertical	N/A
2**	2449.200	79.48	-11.57	54.0	25.48	AV	5.00	150	Vertical	N/A
3	5566.250	54.64	1.50	74.0	-19.36	Peak	282.00	150	Vertical	Pass
3**	5566.250	45.58	1.50	54.0	-8.42	AV	282.00	150	Vertical	Pass
4	7980.000	57.16	2.77	74.0	-16.84	Peak	290.00	150	Vertical	Pass
4**	7980.000	47.60	2.77	54.0	-6.40	AV	290.00	150	Vertical	Pass
5	9312.000	54.83	2.19	74.0	-19.17	Peak	0.00	150	Vertical	Pass
5**	9312.000	44.78	2.19	54.0	-9.22	AV	0.00	150	Vertical	Pass
6	13835.500	57.27	5.36	74.0	-16.73	Peak	223.00	150	Vertical	Pass
6**	13835.500	47.08	5.36	54.0	-6.92	AV	223.00	150	Vertical	Pass

## A.7 Band Edge (Restricted-band band-edge)

### Test Data

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note 3: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

### Test plots


802.11b Mode :

#### CHANNEL 1

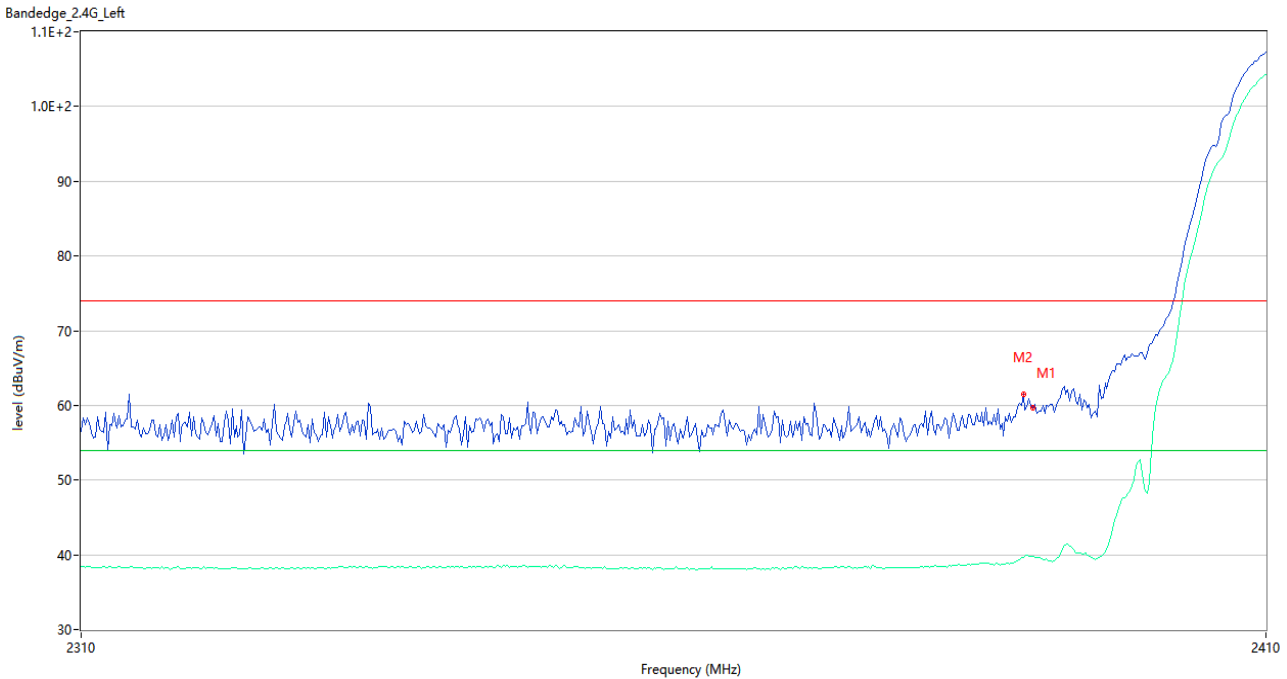


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	59.61	32.63	74.0	-14.39	Peak	0.00	150	Horizontal	Pass
1**	2390.000	39.73	32.63	54.0	-14.27	AV	0.00	150	Horizontal	Pass
2	2389.167	61.46	32.67	74.0	-12.54	Peak	4.00	150	Horizontal	Pass
2**	2389.167	39.71	32.67	54.0	-14.29	AV	4.00	150	Horizontal	Pass

CHANNEL 2

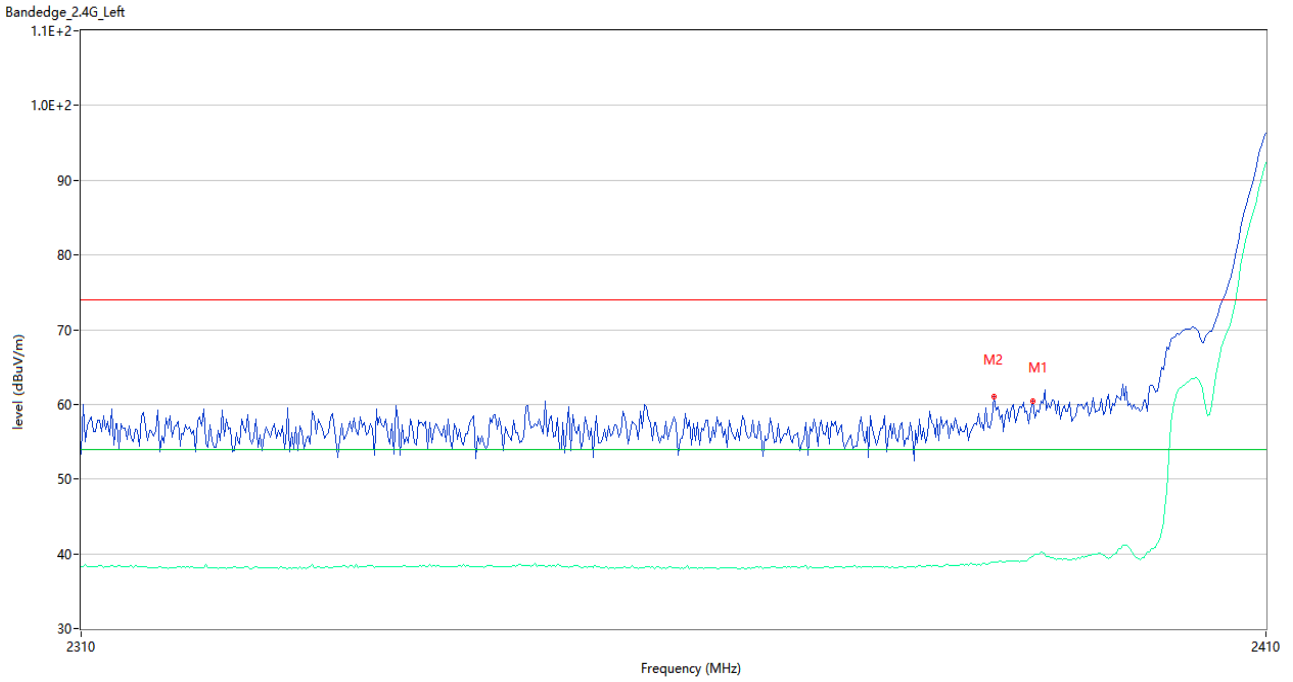


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	60.44	32.63	74.0	-13.56	Peak	8.00	150	Horizontal	Pass
1**	2390.000	39.67	32.63	54.0	-14.33	AV	8.00	150	Horizontal	Pass
2	2386.667	60.97	32.73	74.0	-13.03	Peak	15.00	150	Horizontal	Pass
2**	2386.667	38.83	32.73	54.0	-15.17	AV	15.00	150	Horizontal	Pass

CHANNEL 3

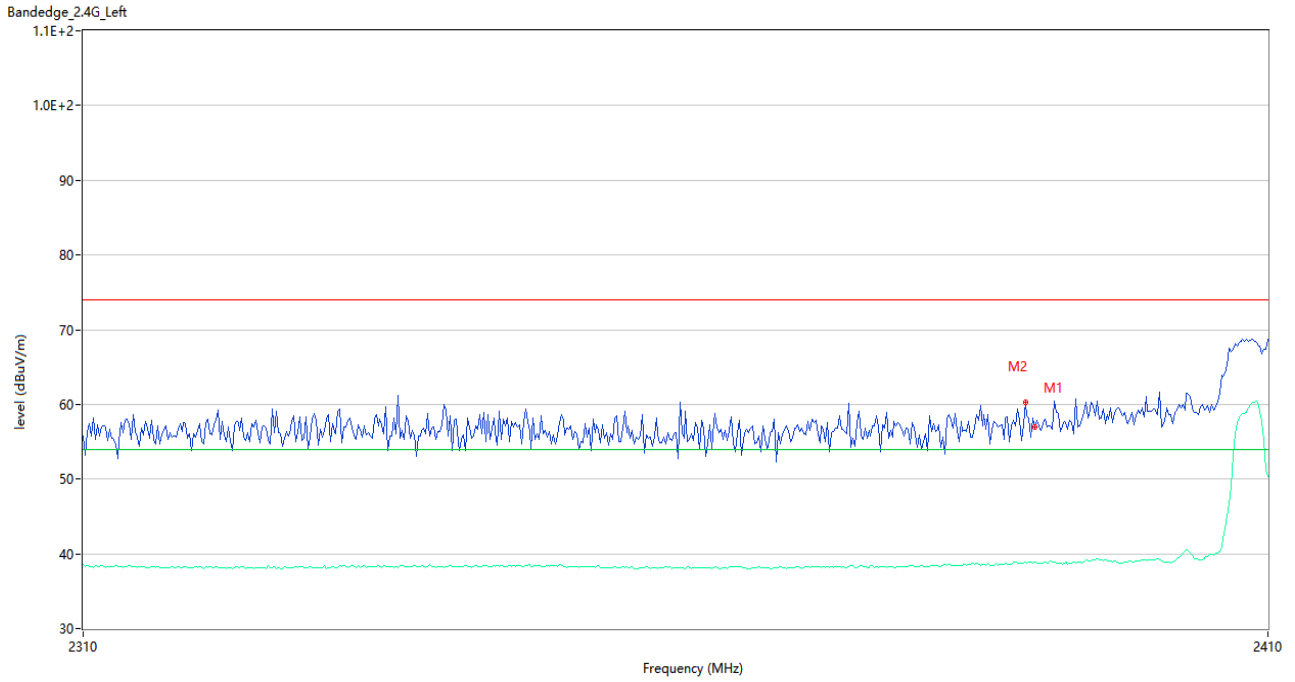


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.04	32.63	74.0	-16.96	Peak	11.00	150	Horizontal	Pass
1**	2390.000	38.88	32.63	54.0	-15.12	AV	11.00	150	Horizontal	Pass
2	2389.167	60.32	32.67	74.0	-13.68	Peak	13.00	150	Horizontal	Pass
2**	2389.167	38.87	32.67	54.0	-15.13	AV	13.00	150	Horizontal	Pass

CHANNEL 4

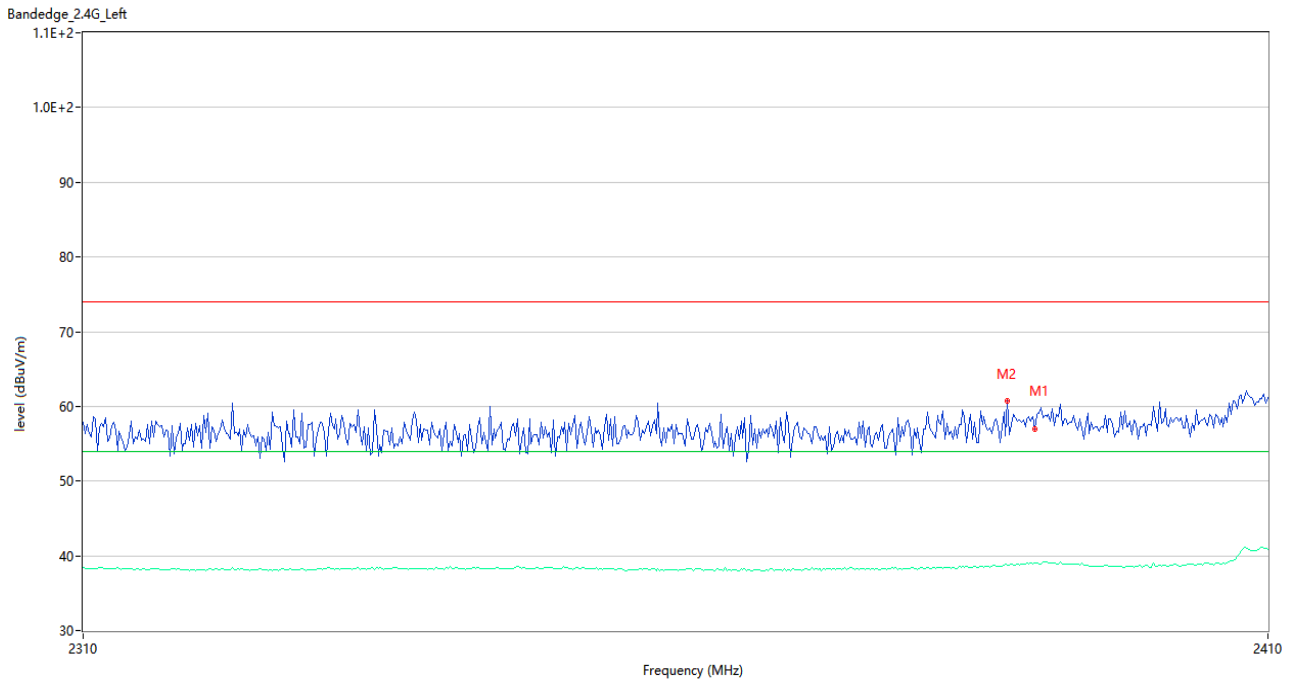

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	56.94	32.63	74.0	-17.06	Peak	5.00	150	Horizontal	Pass
1**	2390.000	39.11	32.63	54.0	-14.89	AV	5.00	150	Horizontal	Pass
2	2387.667	60.73	32.71	74.0	-13.27	Peak	2.00	150	Horizontal	Pass
2**	2387.667	38.67	32.71	54.0	-15.33	AV	2.00	150	Horizontal	Pass

CHANNEL 11

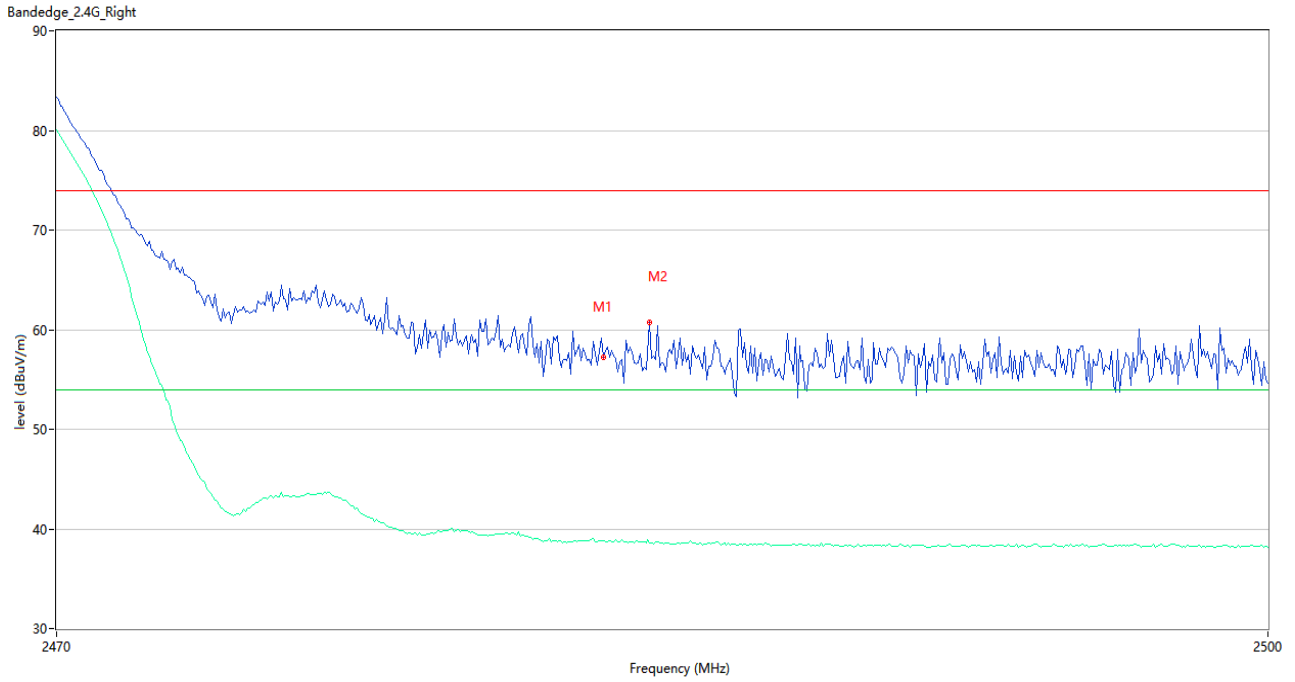


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.29	32.80	74.0	-16.71	Peak	9.00	150	Horizontal	Pass
1**	2483.500	38.81	32.80	54.0	-15.19	AV	9.00	150	Horizontal	Pass
2	2484.650	60.75	32.79	74.0	-13.25	Peak	14.00	150	Horizontal	Pass
2**	2484.650	38.54	32.79	54.0	-15.46	AV	14.00	150	Horizontal	Pass




802.11g Mode :

CHANNEL 1

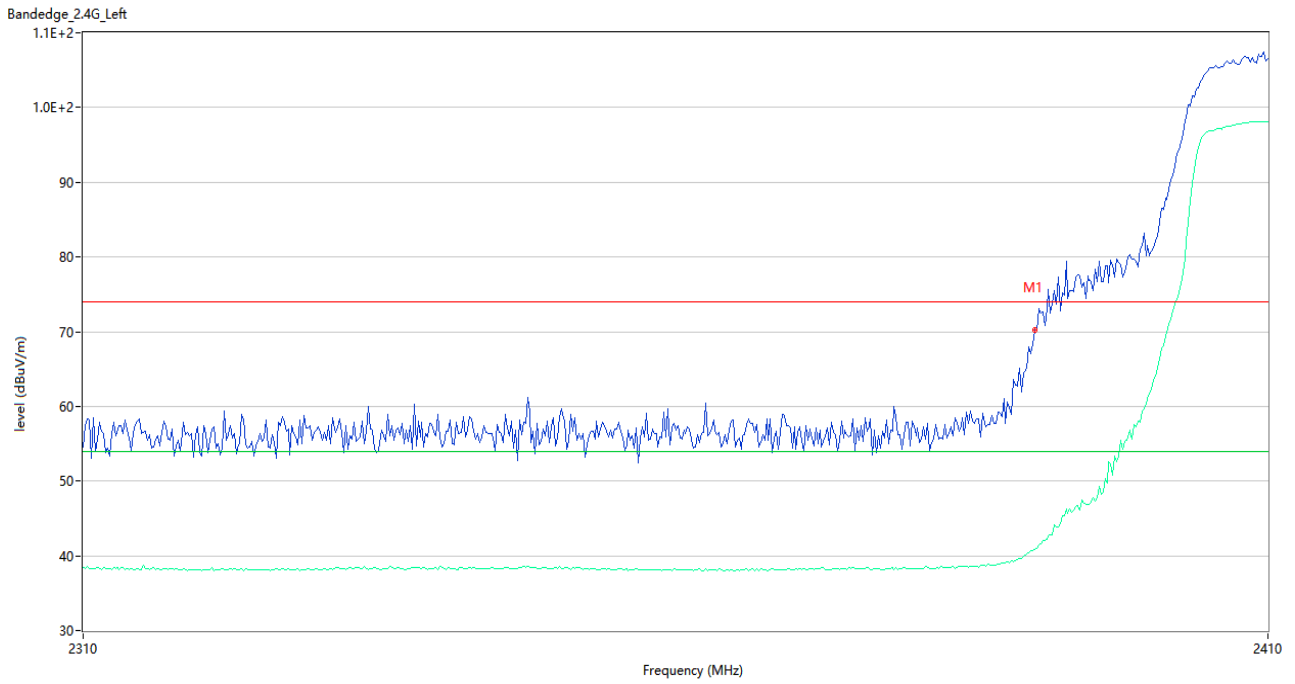


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	70.25	32.63	74.0	-3.75	Peak	15.00	150	Horizontal	Pass
1**	2390.000	40.82	32.63	54.0	-13.18	AV	15.00	150	Horizontal	Pass

CHANNEL 2

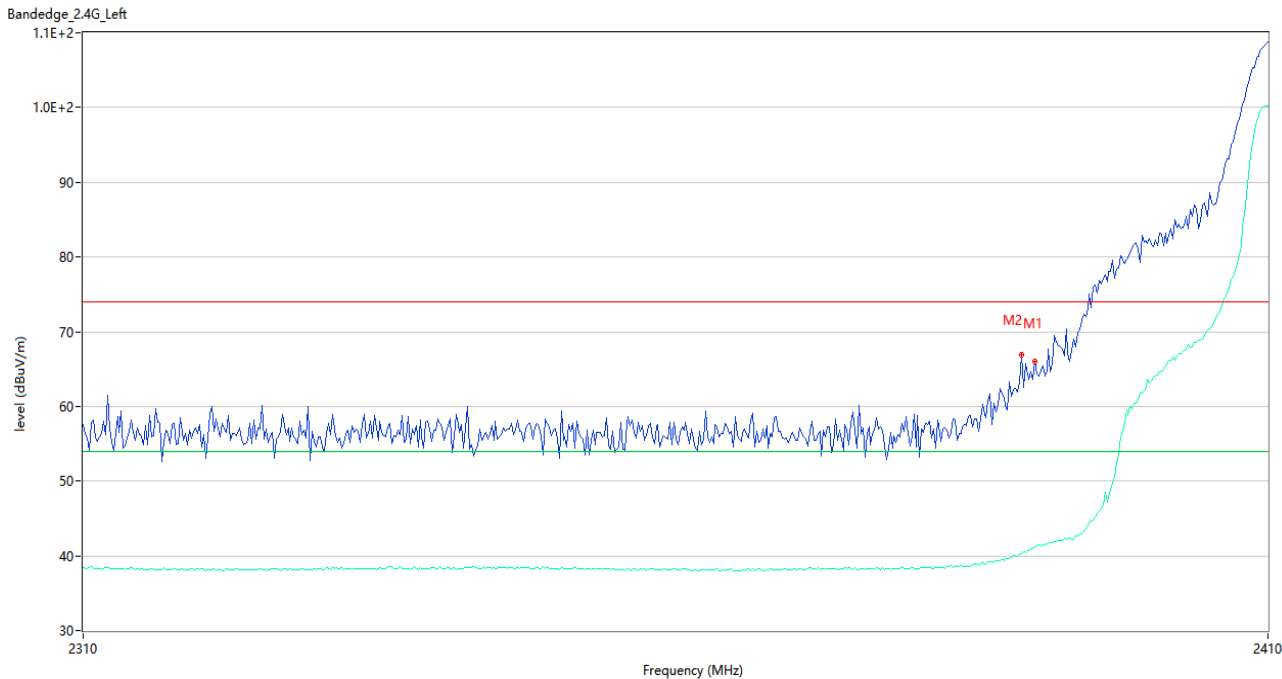


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	66.06	32.63	74.0	-7.94	Peak	9.00	150	Horizontal	Pass
1**	2390.000	41.09	32.63	54.0	-12.91	AV	9.00	150	Horizontal	Pass
2	2388.833	66.98	32.68	74.0	-7.02	Peak	11.00	150	Horizontal	Pass
2**	2388.833	40.25	32.68	54.0	-13.75	AV	11.00	150	Horizontal	Pass

CHANNEL 10

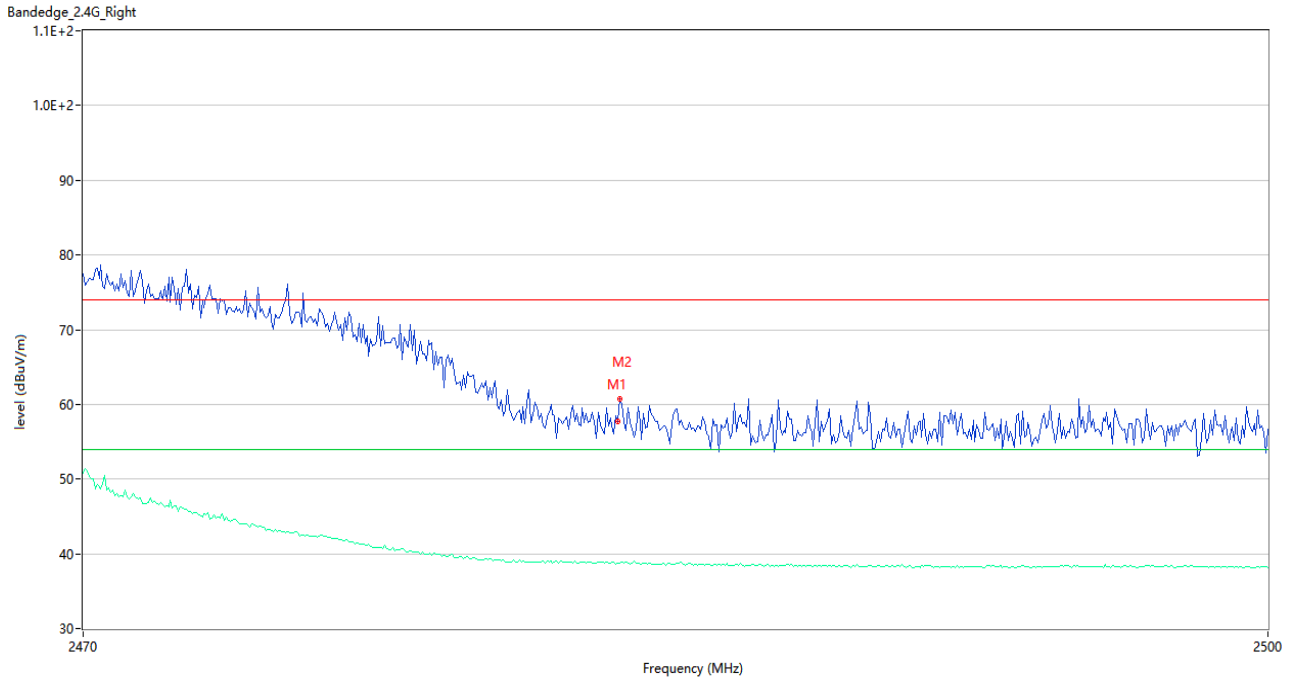

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.65	32.80	74.0	-16.35	Peak	11.00	150	Horizontal	Pass
1**	2483.500	38.71	32.80	54.0	-15.29	AV	11.00	150	Horizontal	Pass
2	2483.550	60.67	32.80	74.0	-13.33	Peak	5.00	150	Horizontal	Pass
2**	2483.550	38.75	32.80	54.0	-15.25	AV	5.00	150	Horizontal	Pass


CHANNEL 11

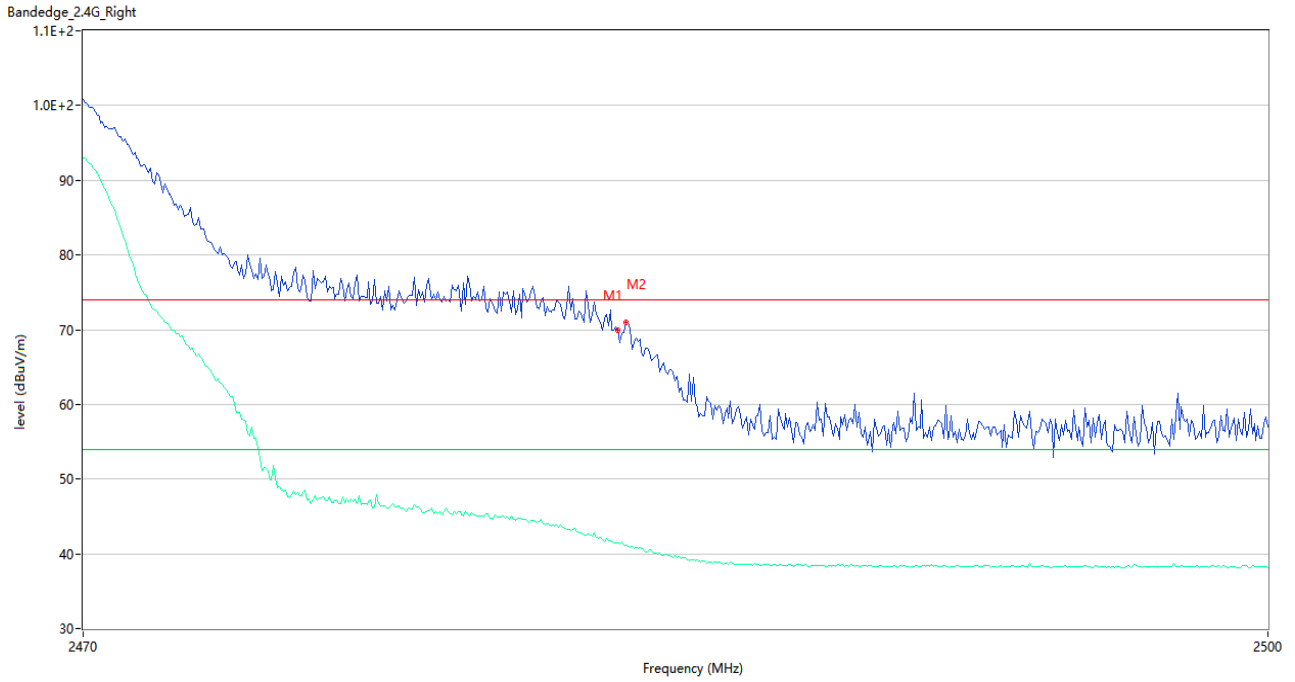

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	69.99	32.80	74.0	-4.01	Peak	9.00	150	Horizontal	Pass
1**	2483.500	41.40	32.80	54.0	-12.60	AV	9.00	150	Horizontal	Pass
2	2483.700	70.93	32.80	74.0	-3.07	Peak	6.00	150	Horizontal	Pass
2**	2483.700	41.13	32.80	54.0	-12.87	AV	6.00	150	Horizontal	Pass


802.11n-20 MHz Mode :

CHANNEL 1

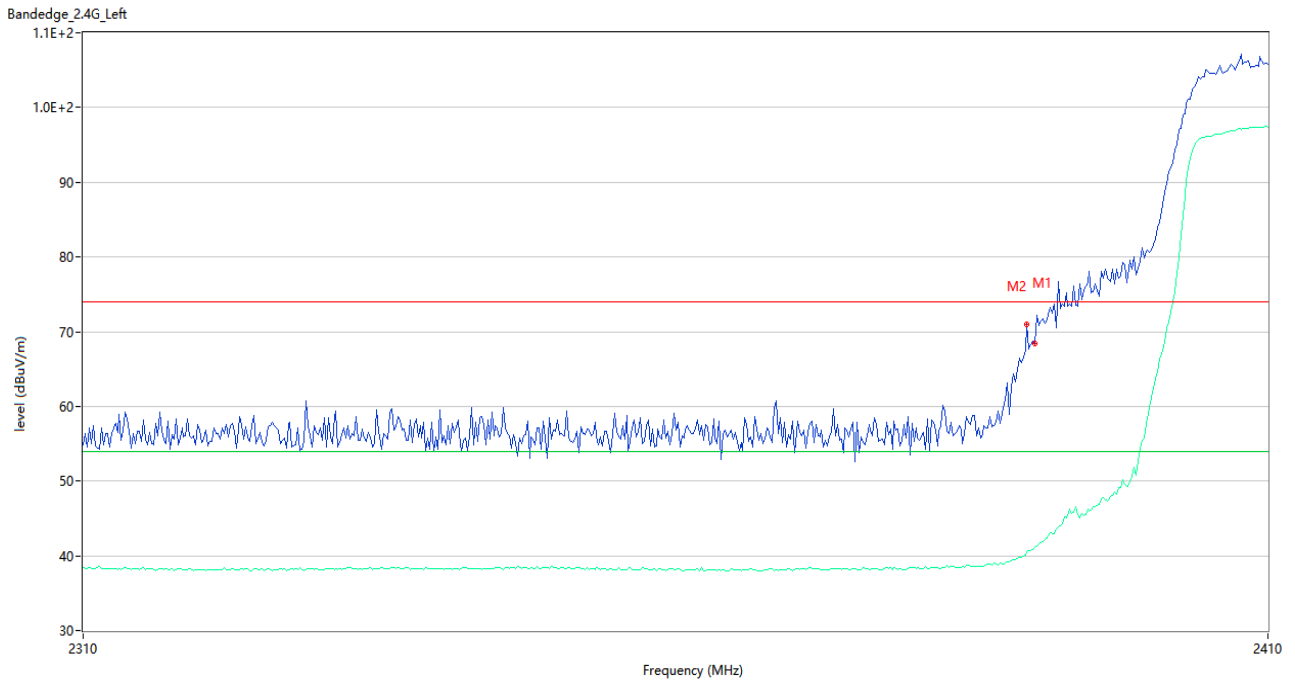


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	68.49	32.63	74.0	-5.51	Peak	14.00	150	Horizontal	Pass
1**	2390.000	41.14	32.63	54.0	-12.86	AV	14.00	150	Horizontal	Pass
2	2389.333	70.94	32.66	74.0	-3.06	Peak	12.00	150	Horizontal	Pass
2**	2389.333	40.51	32.66	54.0	-13.49	AV	12.00	150	Horizontal	Pass

CHANNEL 2

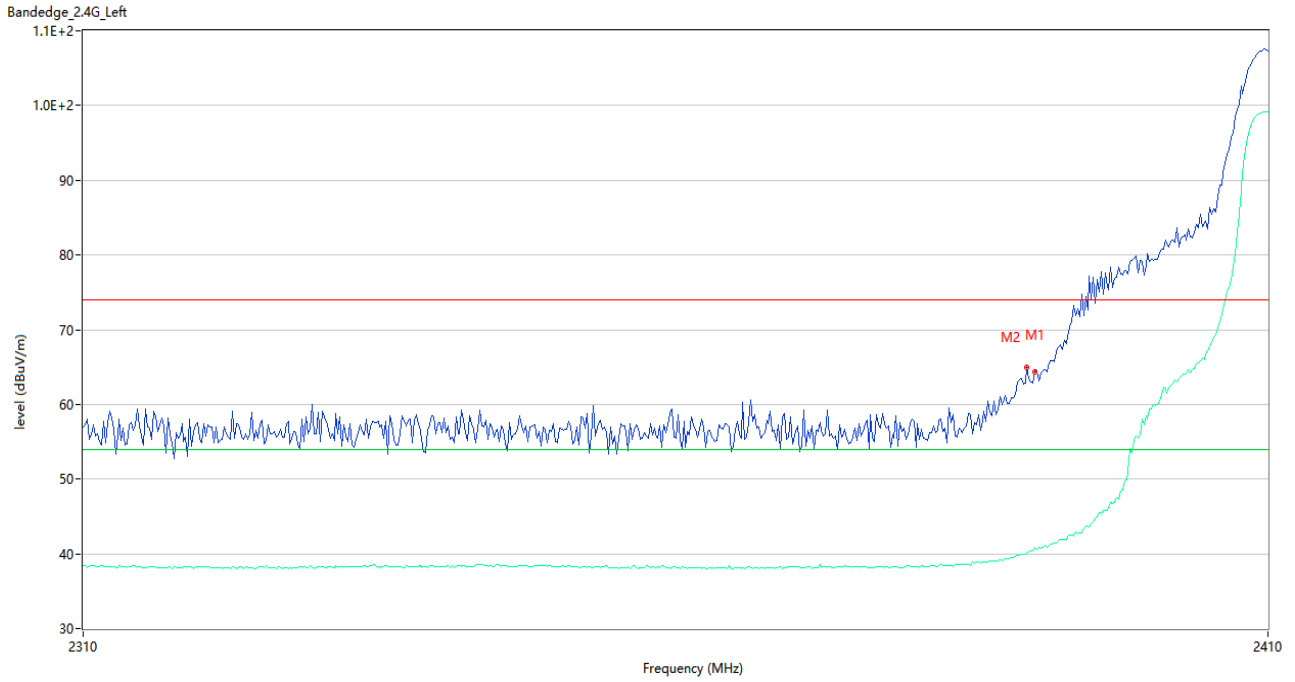


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	64.36	32.63	74.0	-9.64	Peak	8.00	150	Horizontal	Pass
1**	2390.000	40.84	32.63	54.0	-13.16	AV	8.00	150	Horizontal	Pass
2	2389.333	64.93	32.66	74.0	-9.07	Peak	9.00	150	Horizontal	Pass
2**	2389.333	40.16	32.66	54.0	-13.84	AV	9.00	150	Horizontal	Pass

CHANNEL 10

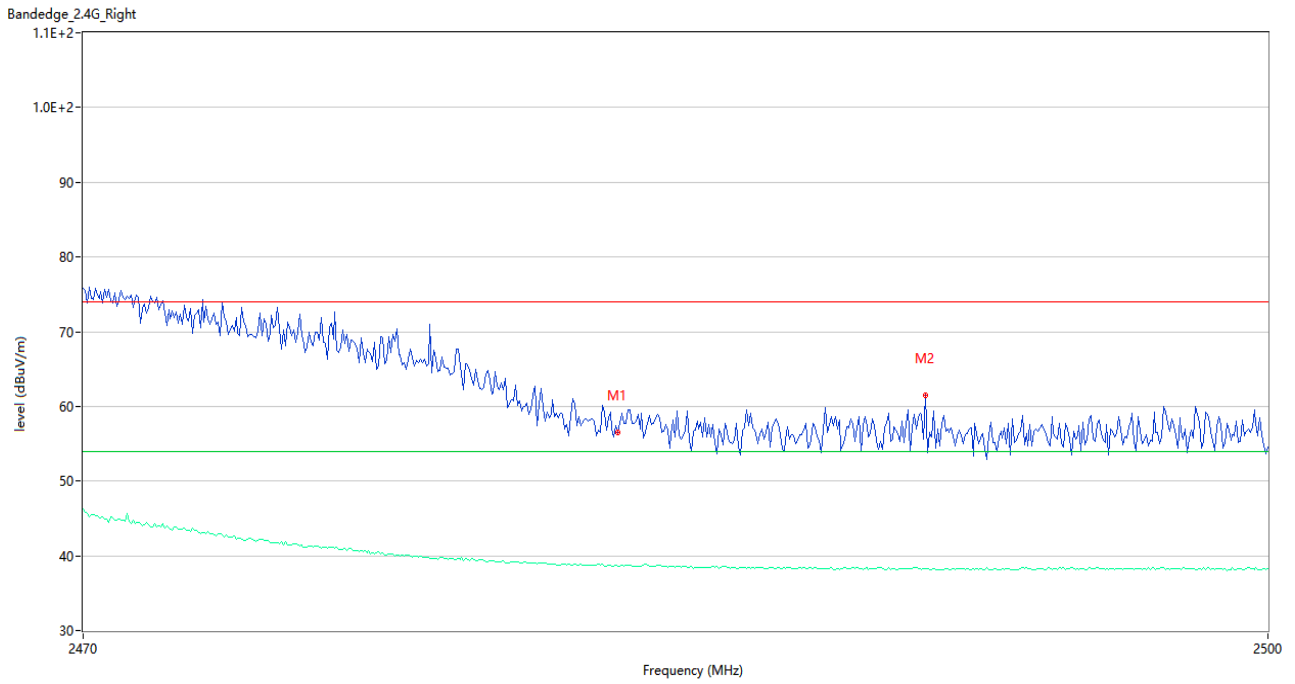

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.50	32.80	74.0	-17.50	Peak	7.00	150	Horizontal	Pass
1**	2483.500	38.63	32.80	54.0	-15.37	AV	7.00	150	Horizontal	Pass
2	2491.300	61.46	32.63	74.0	-12.54	Peak	7.00	150	Horizontal	Pass
2**	2491.300	38.25	32.63	54.0	-15.75	AV	7.00	150	Horizontal	Pass

CHANNEL 11

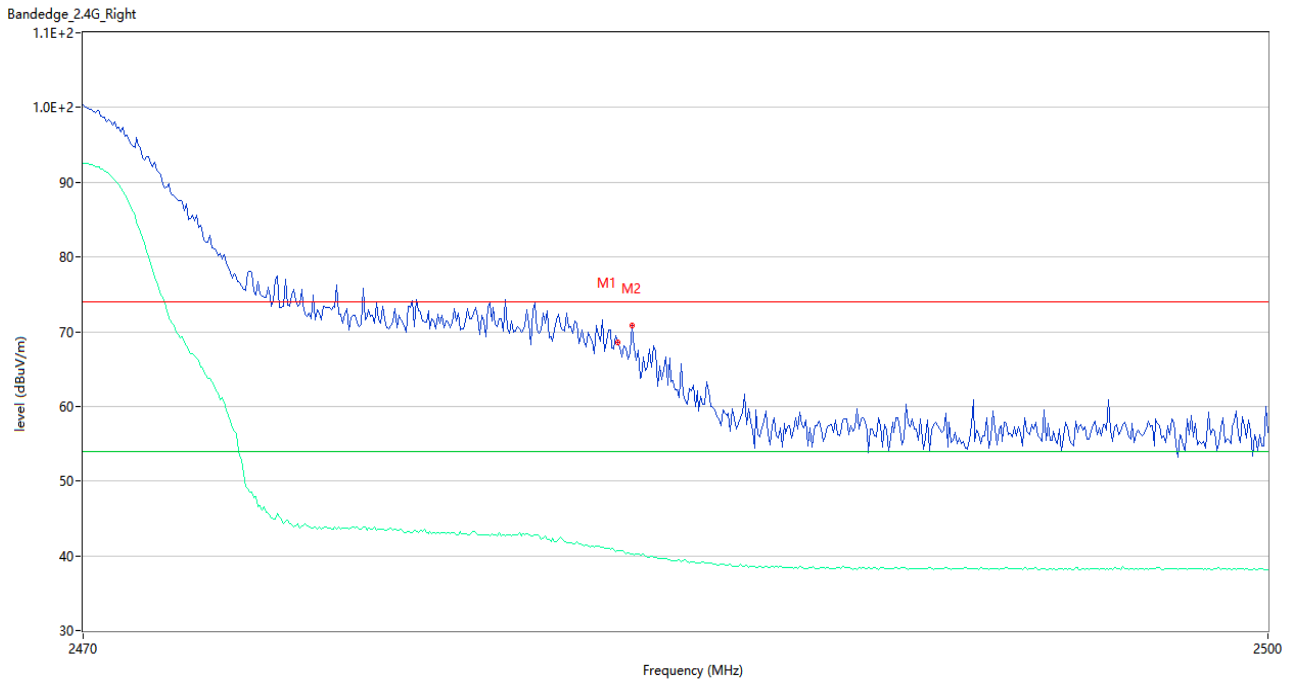


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	68.56	32.80	74.0	-5.44	Peak	8.00	150	Horizontal	Pass
1**	2483.500	40.74	32.80	54.0	-13.26	AV	8.00	150	Horizontal	Pass
2	2483.850	70.75	32.80	74.0	-3.25	Peak	12.00	150	Horizontal	Pass
2**	2483.850	40.31	32.80	54.0	-13.69	AV	12.00	150	Horizontal	Pass




802.11n-40 MHz Mode :

CHANNEL 3

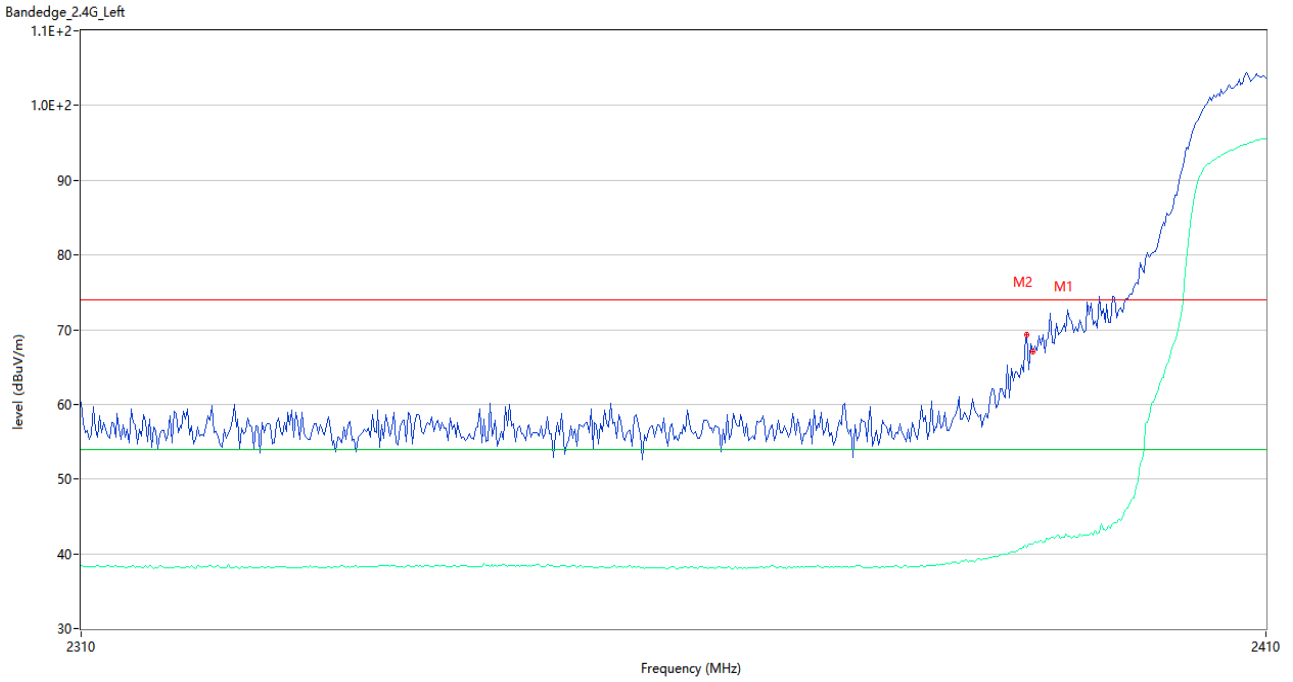


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	67.00	32.63	74.0	-7.00	Peak	4.00	150	Horizontal	Pass
1**	2390.000	41.34	32.63	54.0	-12.66	AV	4.00	150	Horizontal	Pass
2	2389.500	69.26	32.65	74.0	-4.74	Peak	15.00	150	Horizontal	Pass
2**	2389.500	40.88	32.65	54.0	-13.12	AV	15.00	150	Horizontal	Pass

CHANNEL 4

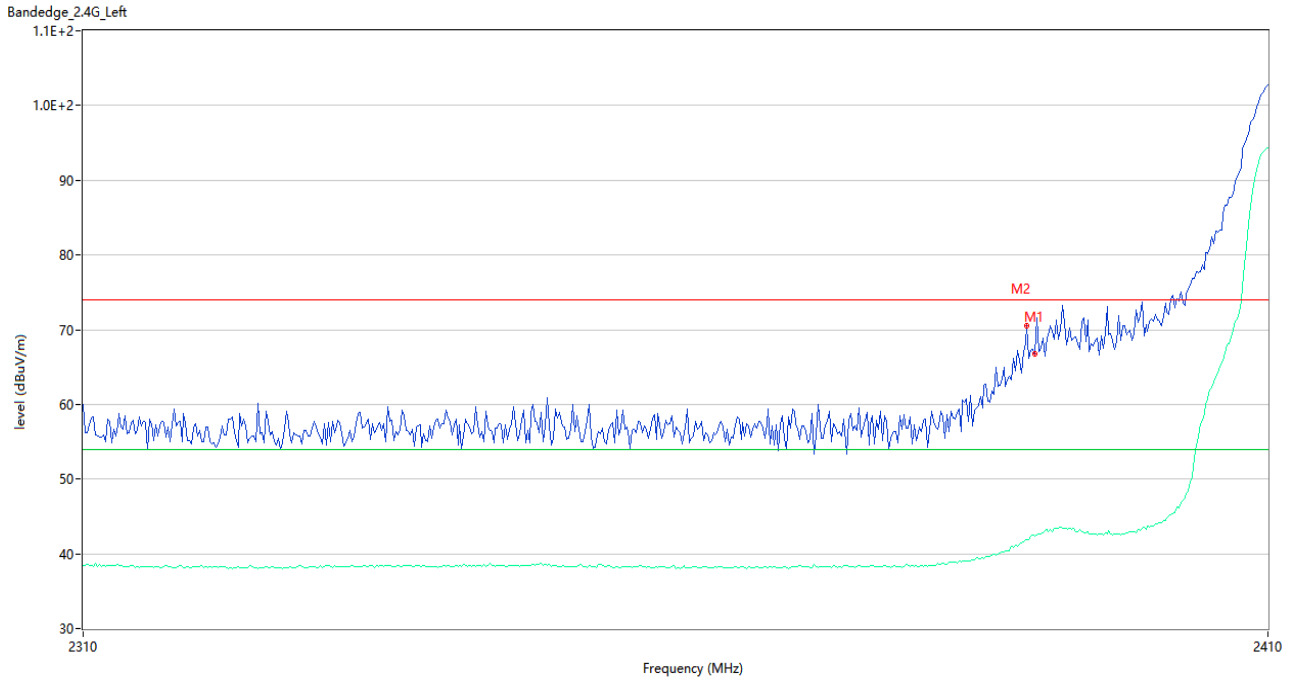


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	66.73	32.63	74.0	-7.27	Peak	10.00	150	Horizontal	Pass
1**	2390.000	42.43	32.63	54.0	-11.57	AV	10.00	150	Horizontal	Pass
2	2389.333	70.59	32.66	74.0	-3.41	Peak	1.00	150	Horizontal	Pass
2**	2389.333	41.83	32.66	54.0	-12.17	AV	1.00	150	Horizontal	Pass

CHANNEL 5

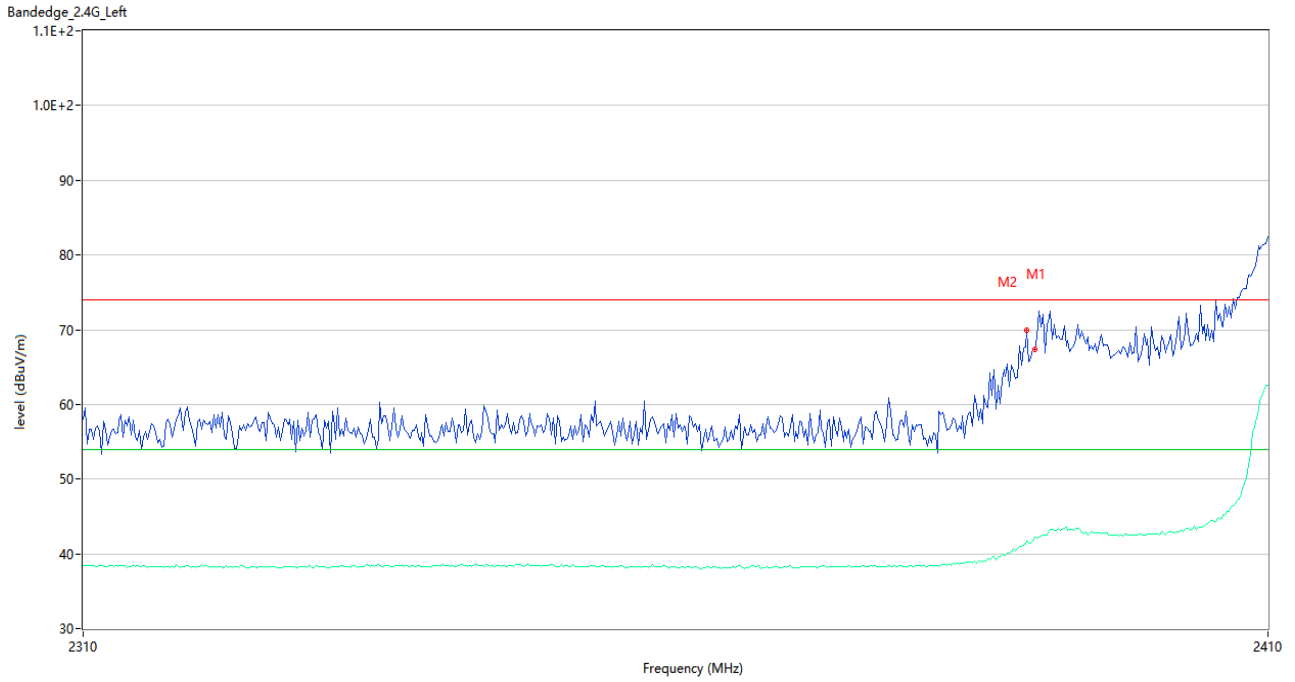


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	67.35	32.63	74.0	-6.65	Peak	2.00	150	Horizontal	Pass
1**	2390.000	42.25	32.63	54.0	-11.75	AV	2.00	150	Horizontal	Pass
2	2389.333	69.90	32.66	74.0	-4.10	Peak	1.00	150	Horizontal	Pass
2**	2389.333	41.74	32.66	54.0	-12.26	AV	1.00	150	Horizontal	Pass

CHANNEL 6

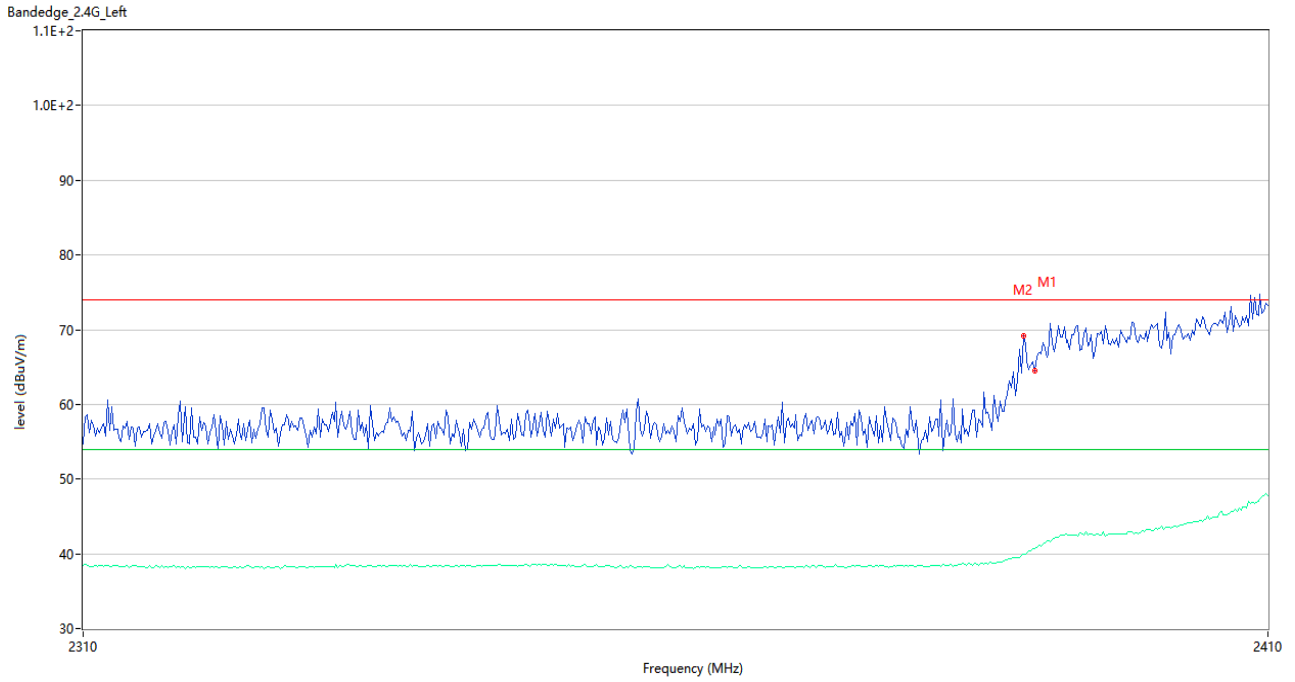

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	64.55	32.63	74.0	-9.45	Peak	3.00	150	Horizontal	Pass
1**	2390.000	40.64	32.63	54.0	-13.36	AV	3.00	150	Horizontal	Pass
2	2389.000	69.12	32.67	74.0	-4.88	Peak	1.00	150	Horizontal	Pass
2**	2389.000	39.92	32.67	54.0	-14.08	AV	1.00	150	Horizontal	Pass

CHANNEL 9

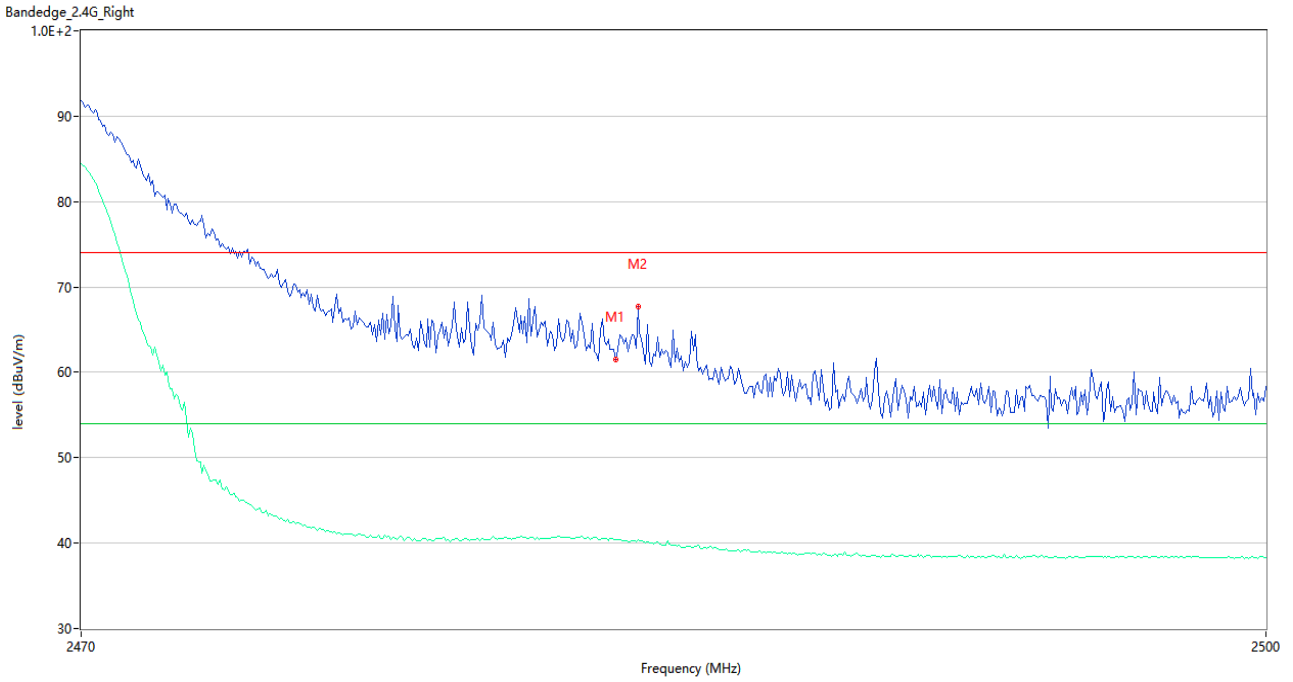

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	61.57	32.80	74.0	-12.43	Peak	3.00	150	Horizontal	Pass
1**	2483.500	40.42	32.80	54.0	-13.58	AV	3.00	150	Horizontal	Pass
2	2484.050	67.69	32.80	74.0	-6.31	Peak	14.00	150	Horizontal	Pass
2**	2484.050	40.38	32.80	54.0	-13.62	AV	14.00	150	Horizontal	Pass

## A.8 Power Spectral Density (PSD)

### Test Data

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
1	-23.181	8
2	-22.62	8
3	-20.471	8
4	-18.218	8
6	-19.364	8
11	-17.357	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
1	-22.993	8
2	-21.634	8
6	-24.913	8
10	-23.484	8
11	-23.249	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
1	-23.507	8
2	-24.218	8
6	-26.215	8
10	-25.129	8
11	-25.465	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
3	-27.774	8
4	-28.253	8
5	-30.357	8
6	-28.871	8
9	-28.999	8

Test plots

802.11b CHANNEL 1



802.11b CHANNEL 2



802.11b CHANNEL 3



802.11b CHANNEL 4




802.11b CHANNEL 6



802.11b CHANNEL 11



802.11g CHANNEL 1

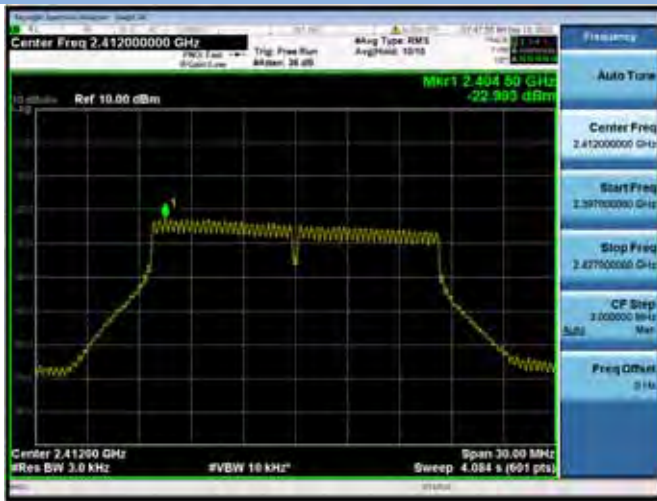

802.11g CHANNEL 2



802.11g CHANNEL 6



802.11g CHANNEL 10




802.11g CHANNEL 11






802.11n-20 MHz CHANNEL 1

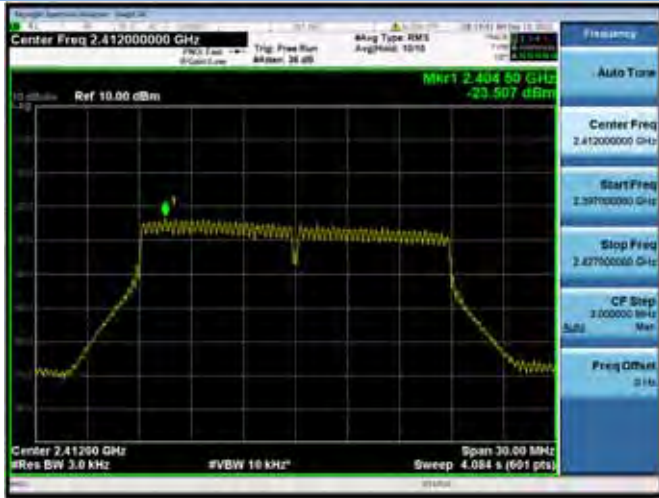


802.11 n-20 MHz CHANNEL 2

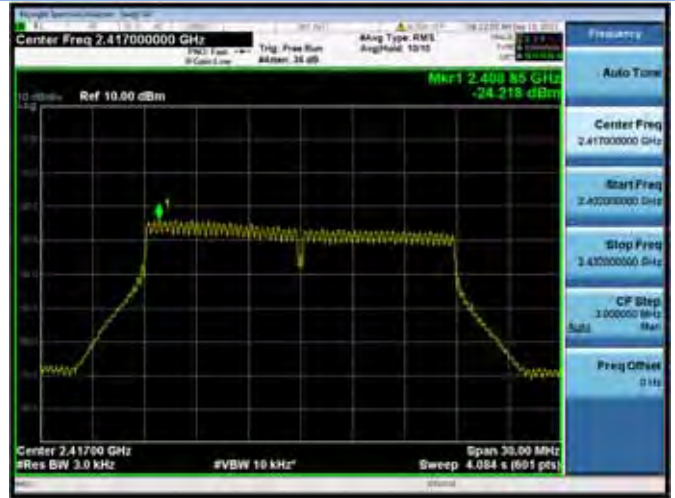

802.11n-20 MHz CHANNEL 6



802.11n-20 MHz CHANNEL 10

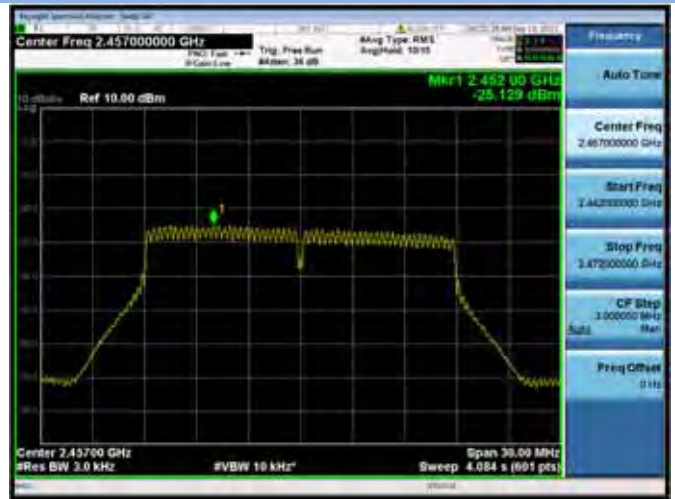

802.11n-20 MHz CHANNEL 11



802.11n-20 MHz CHANNEL 3



802.11n-40 MHz CHANNEL 4



802.11n-20 MHz CHANNEL 5



802.11n-40 MHz CHANNEL 6



802.11n-20 MHz CHANNEL 9



## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-SZ2181089-AR.pdf".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ2181089-AW.pdf".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-SZ2181089-AI.pdf".

--END OF REPORT--