


ENGINEERING TEST REPORT



Wall Mounted Remote Control
Model: DPCRWS
FCC ID: Z49-00002

Applicant:

Dimplex North America Limited
1367 Industrial Road
Cambridge, ON N1R7G8

In Accordance With

Federal Communications Commission (FCC)
Part 15, Subpart C, Section 15.249
Low Power Transmitters Operating in the Frequency Band 2400 – 2483.5 MHz

UltraTech's File No.: DIEX-008_FCC15C

This Test report is Issued under the Authority of
Tri M. Luu, BAsC
Vice President of Engineering
UltraTech Group of Labs

Date: October 18, 2011

Report Prepared by: Dharmajit Solanki

Tested by: Hung Trinh

Issued Date: October 18, 2011

Test Dates: October 16, 2011

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com

FCC

91038



1309



46390-2049



NvLap Lab Code 200093-0



SL2-IN-E-1119R



Korea KCC-RRL
CA2049

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	2
1.1. SCOPE.....	2
1.2. RELATED SUBMITTAL(S)/GRANT(S)	2
1.3. NORMATIVE REFERENCES	2
EXHIBIT 2. PERFORMANCE ASSESSMENT	3
2.1. CLIENT INFORMATION.....	3
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION	3
2.3. EUT'S TECHNICAL SPECIFICATIONS	4
2.4. ASSOCIATED ANTENNA DESCRIPTION.....	4
2.5. LIST OF EUT'S PORTS.....	4
2.6. ANCILLARY EQUIPMENT	4
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	5
3.1. CLIMATE TEST CONDITIONS	5
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS	5
EXHIBIT 4. SUMMARY OF TEST RESULTS	6
4.1. LOCATION OF TESTS.....	6
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	6
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	6
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS.....	7
5.1. TEST PROCEDURES.....	7
5.2. MEASUREMENT UNCERTAINTIES	7
5.3. MEASUREMENT EQUIPMENT USED	7
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER.....	7
5.5. ANTENNA REQUIREMENTS [47 CFR § 15.203].....	7
5.6. 20 DB BANDWIDTH [§ 15.215(C)]	8
5.7. FUNDAMETAL FIELD STRENGTH AND HAROMIC EMISSIONS (RADIATED AT 3M) [47 CFR §§ 15.249(A), 15.209 & 15.205].....	12
EXHIBIT 6. TEST EQUIPMENT LIST	18
EXHIBIT 7. MEASUREMENT UNCERTAINTY.....	19
7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY	19

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Part 15, Subpart C, Section 15.249
Title:	Code of Federal Regulations (CFR), Title 47 – Telecommunication, Part 15
Purpose of Test:	Equipment Certification for for Low Power Licensed-Exempt Transmitters operating in the Frequency Band 400–2483.5 MHz.
Test Procedures:	American National Standards Institute ANSI C63.10 - American National Standard for Testing Unlicensed Wireless Devices
Environmental Classification:	<input checked="" type="checkbox"/> Commercial, industrial or business environment <input checked="" type="checkbox"/> Residential environment

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

Publication	Year	Title
47 CFR Parts 0-19	2010	Code of Federal Regulations (CFR), Title 47 – Telecommunication, Parts 0 to 15
ANSI C63.4	2003 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
CISPR 22 & EN 55022	2008-09 2006	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Dimplex North America Limited
Address:	1367 Industrial Road Cambridge, ON N1R7G8 Canada
Contact Person:	Liming Xia Phone #: 519-650-3630 x 475 Fax #: 519-650-3651 Email Address: dxia@dimplex.com

MANUFACTURER	
Name:	Dimplex North America Limited
Address:	1367 Industrial Road Cambridge, ON N1R7G8 Canada
Contact Person:	Liming Xia Phone #: 519-650-3630 x 475 Fax #: 519-650-3651 Email Address: dxia@dimplex.com

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The applicant supplied the following information.

Brand Name:	Dimplex North America Limited
Product Name:	Wall Mounted Remote Control
Model Name or Number:	DPCRWS
Serial Number:	Test Sample
Type of Equipment:	Low Power Transceiver
Input Power Supply Type:	DC 3V Coin Cell Battery
Primary User Functions of EUT:	The wall mounted remote control designed to control a heater. It programmed to pick an address that both the Remote control and synchronized baseboard will use to communicate with each other.

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Portable, Mobile
Intended Operating Environment:	Residential Commercial, industrial or business
Power Supply Requirement:	+3.0 V dc
RF Output Power Rating:	47.26 dBµV/m Avg at 3m distance
Operating Frequency Range:	2402 – 2480 MHz
Channel Spacing:	1 MHz
20 dB Bandwidth:	762.3 kHz
Duty Cycle:	Manual momentary operation (< 4% as Ton is max 4 ms)
Modulation Type:	GFSK
Antenna Connector Types:	Integral antenna permanently mounted on PCB

2.4. ASSOCIATED ANTENNA DESCRIPTION

Antenna:	
Type:	PCB Antenna
Frequency Range:	2400 – 2483.5 MHz
Impedance:	50 Ohm
Gain (dBi):	0 dBi

2.5. LIST OF EUT'S PORTS

None

2.6. ANCILLARY EQUIPMENT

None

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21 to 23 °C
Humidity:	45 to 58%
Pressure:	102 kPa
Power Input Source:	3V Lithium battery

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	EUT was configured to transmit continuously for emissions measurements at of lowest, middle and highest channel frequencies.
Special Test Software:	None
Special Hardware Used:	None
Transmitter Test Antenna:	The EUT tested with its permanently attached integral antenna intended in normal use.

Transmitter Test Signals	
Frequency Band(s):	2402 - 2480 MHz
Frequency(ies) Tested: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	2402, 2440 and 2480 MHz
RF Power Output: (measured maximum output power):	47.26 dBµV/m Avg at 3m distance
Normal Test Modulation:	GFSK
Modulating Signal Source:	Internal

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2014-04-04.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.203	Antenna requirements	Yes
15.207(a)	AC Power Line Conducted Emissions	N/A*
15.215(c)	20 dB Bandwidth	Yes
15.249(a), 15.209, 15.205	Transmitter Radiated Emissions, Harmonic Emissions	Yes

*Not applicable for battery operated device.

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in ANSI C63.10.

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC: 2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

5.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The wall mounted remote control designed to provide wireless communication to control a heater.

5.5. ANTENNA REQUIREMENTS [47 CFR § 15.203]

5.5.1. Requirements

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Notes: This requirement does not apply to carrier current devices operated under the provisions of @ 15.211, 15.213, 15.217, 17.219 or 15.221.

5.5.2. Engineering Analysis

Antenna of this EUT is permanently integrated to the PCB, located inside the enclosure.

5.6. 20 dB BANDWIDTH [§ 15.215(c)]


5.6.1. Limit(s)

The fundamental emission must be in the authorized bandwidth.

5.6.2. Method of Measurements

ANSI C63.10; 2009.

5.6.3. Test Arrangement

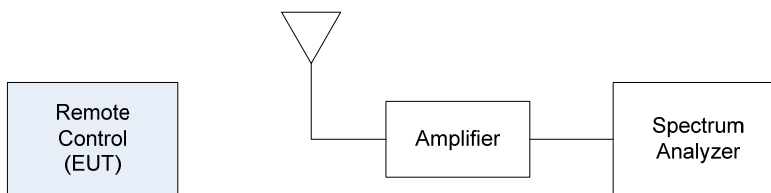


5.6.4. Test Data


Frequency (MHz)	20 dB Bandwidth (kHz)
2402	541.08
2440	654.10
2480	762.32

See the following plots for detailed measurements.


Plot 5.6.4.1. 20 dB Bandwidth
Test Frequency: 2402 MHz

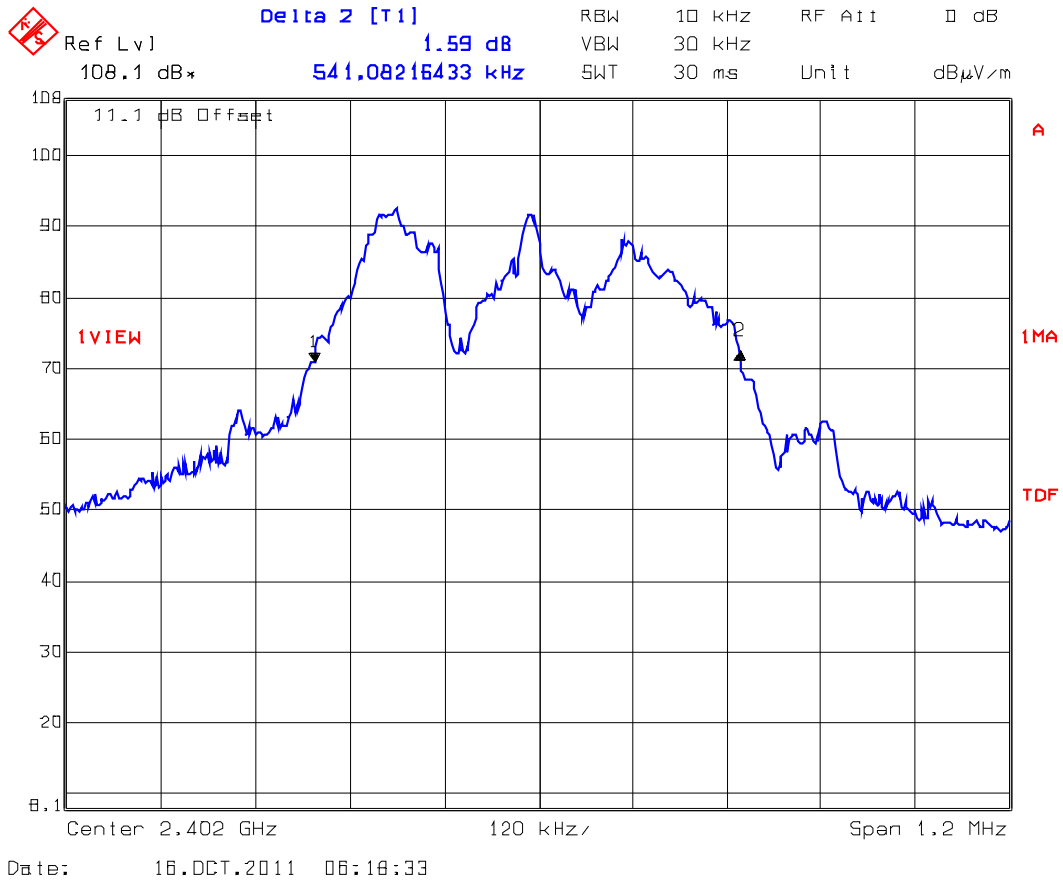

Plot 5.6.4.2. 20 dB Bandwidth
 Test Frequency: 2440 MHz

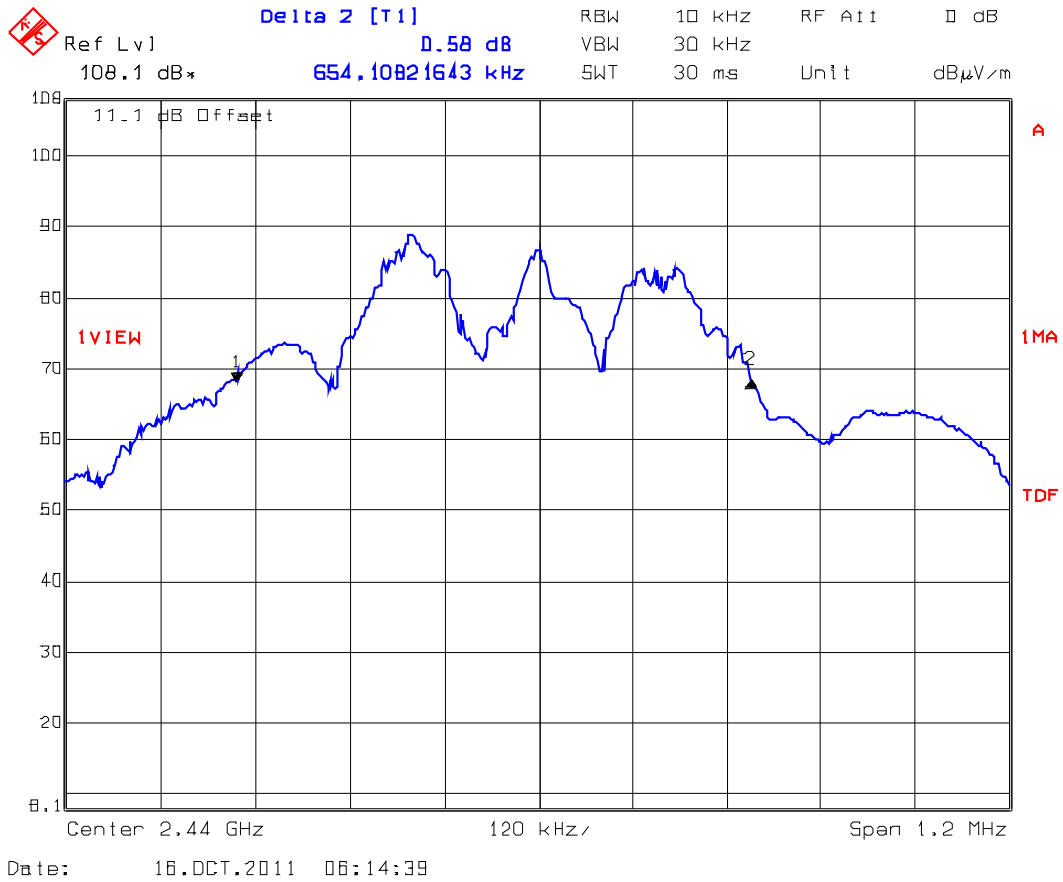

Plot 5.6.4.3. 20 dB Bandwidth
 Test Frequency: 2480 MHz

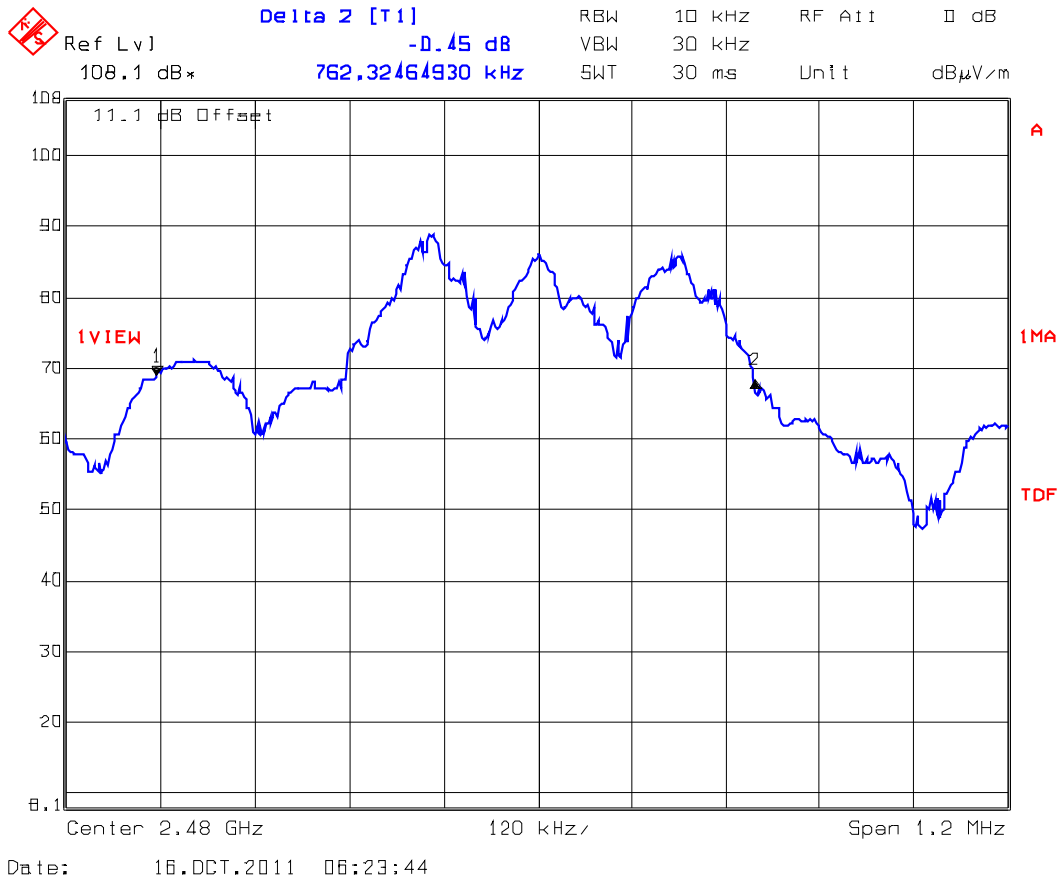

5.7. FUNDAMENTAL FIELD STRENGTH AND HARMONIC EMISSIONS (RADIATED AT 3m) [47 CFR §§ 15.249(a), 15.209 & 15.205]

5.7.1. Limits

(a) The Field Strength of emissions from intentional radiators operated within 2400–2483.5 MHz band shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (µV/m)
2400–2483.5 MHz	50	500

(c) Field strength limits specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

(e) As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

- The fundamental frequency shall not fall within any restricted frequency band specified in 15.205. All other emissions that fall in the restricted bands shall not exceed the general radiated emission limits specified in 15.209(a).

47 CFR 15.205 – Restricted Bands of Operation

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(²)
13.36–13.41.			

¹Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.


²Above 38.6

47 CFR 15.209(a) - Field Strength Limits within Restricted Frequency Bands		
Frequency (MHz)	Field Strength Limits ($\mu\text{V}/\text{m}$)	Distance (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

5.7.2. Method of Measurements

Refer to ANSI C63.10 and ANSI C63.4 for measurement methods.

5.7.3. Test Arrangement

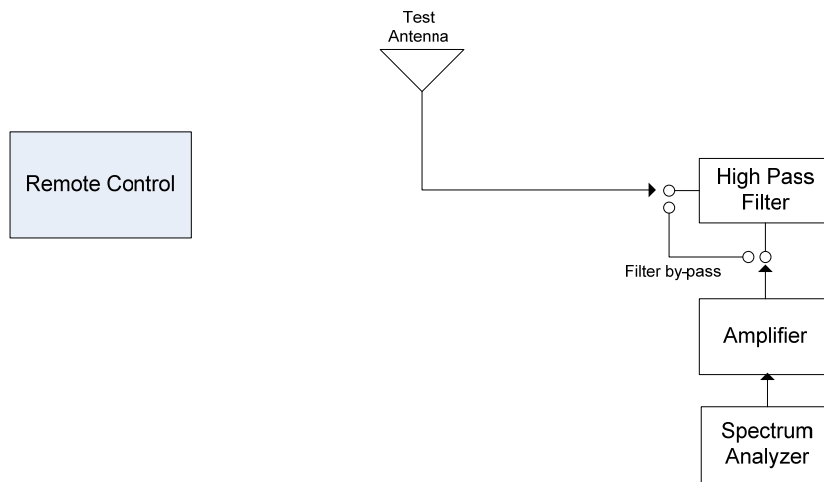

5.7.4. Test Data

Remarks:


- All spurious emissions that are in excess of 20 dB below the specified limit recorded.
- EUT tested in three orthogonal positions.
- The following test results are the worst-case measurements.

Test Frequency:: 2402 MHz						
Test Frequency Range: 30 MHz – 25 GHz						
Frequency (MHz)	Peak E-Field @3m (dBµV/m)	Average E-Field @3m (dBµV/m)	Antenna Plane (H/V)	Field Strength Limit of Fundamental/Harmonic Peak/Avg (dBµV/m)	Field Strength Limit of § 15.209 (dBµV/m)	Margin (dB)
2402	93.46	47.15	V	114 / 94	--	-46.8
2402	94.24	47.26	H	114 / 94	--	-46.7
4804	62.92	37.09	V	74 / 54	54.0	-16.9
4804	61.74	37.31	H	74 / 54	54.0	-16.7
7206	63.86	41.64	V	74 / 54	54.0	-12.4
7206	62.22	40.70	H	74 / 54	54.0	-13.3


Test Frequency:: 2440 MHz						
Test Frequency Range: 30 MHz – 25 GHz						
Frequency (MHz)	Peak E-Field @3m (dBµV/m)	Average E-Field @3m (dBµV/m)	Antenna Plane (H/V)	Field Strength Limit of Fundamental/Harmonic (dBµV/m)	Field Strength Limit of § 15.209 (dBµV/m)	Margin (dB)
2440	89.57	46.69	V	114 / 94	--	-47.3
2440	92.06	46.73	H	114 / 94	--	-47.3
4880	64.46	36.59	V	74 / 54	54.0	-17.4
4880	59.87	35.57	H	74 / 54	54.0	-18.4
7320	67.98	41.84	V	74 / 54	54.0	-12.2
7320	59.50	40.10	H	74 / 54	54.0	-13.9

Test Frequency:: 2480 MHz						
Test Frequency Range: 30 MHz – 25 GHz						
Frequency (MHz)	Peak E-Field @3m (dBµV/m)	Average E-Field @3m (dBµV/m)	Antenna Plane (H/V)	Field Strength Limit of Fundamental/Harmonic (dBµV/m)	Field Strength Limit of § 15.209 (dBµV/m)	Margin (dB)
2480	90.89	47.28	V	114 / 94	--	-46.7
2480	90.18	47.15	H	114 / 94	--	-46.2
4960	59.07	36.32	V	74 / 54	54.0	-17.7
4960	59.75	36.30	H	74 / 54	54.0	-17.7
7440	63.13	42.13	V	74 / 54	54.0	-11.9
7440	61.48	41.84	H	74 / 54	54.0	-12.2

Plot 5.7.4.1. Band-Edge RF Radiated Emissions @ 3 m, Continuous Mode
 Low End of Frequency Band, 2402 MHz, Rx Antenna Orientation: Horizontal

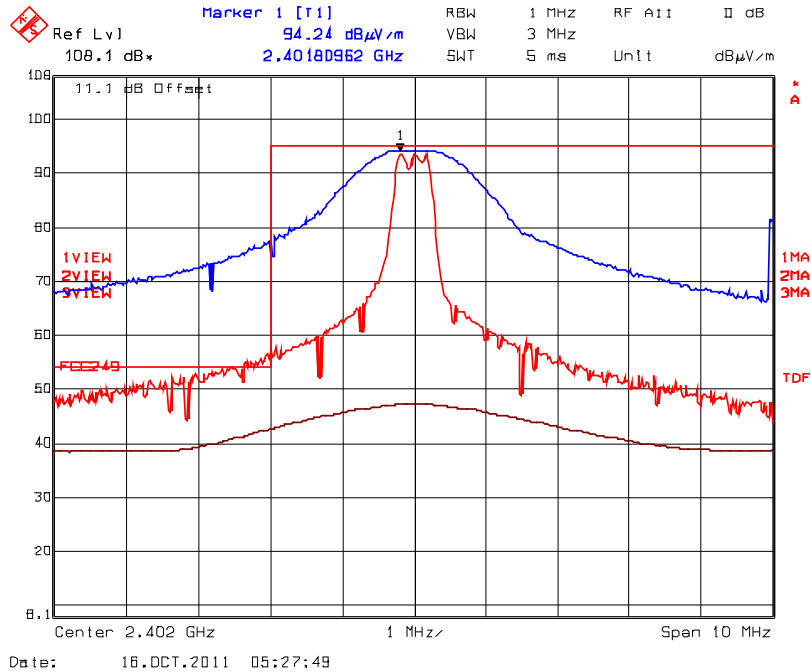


Plot 5.7.4.2. Band-Edge RF Radiated Emissions @ 3 m, Continuous Mode
 Low End of Frequency Band, 2402 MHz, Rx Antenna Orientation: Horizontal

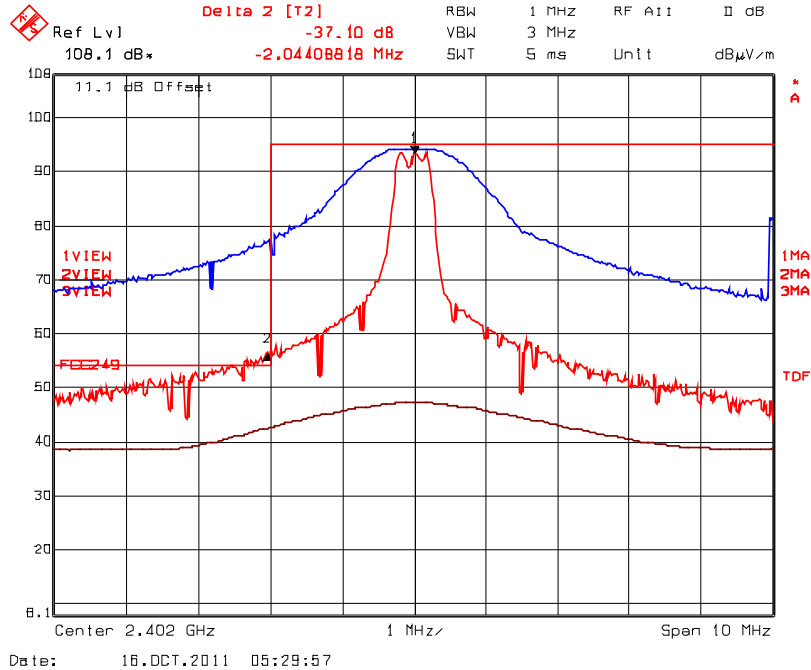


Trace 1: RBW= 1 MHz, VBW= 3 MHz
 Trace 2: RBW= 100 kHz, VBW= 300 kHz, Delta (Peak to Band-Edge): 37.10dB
 Trace 3: RBW= 1 MHz, VBW= 10 Hz
 Peak Band-Edge at 2400 MHz: Peak= 94.24dBuV/m – 37.10dB= 57.14dBuV/m < (Limit 74 dBuV/m)

Plot 5.7.4.3. Band-Edge RF Radiated Emissions @ 3 m, Continuous Mode
 Low End of Frequency Band, 2402 MHz, Rx Antenna Orientation: Vertical

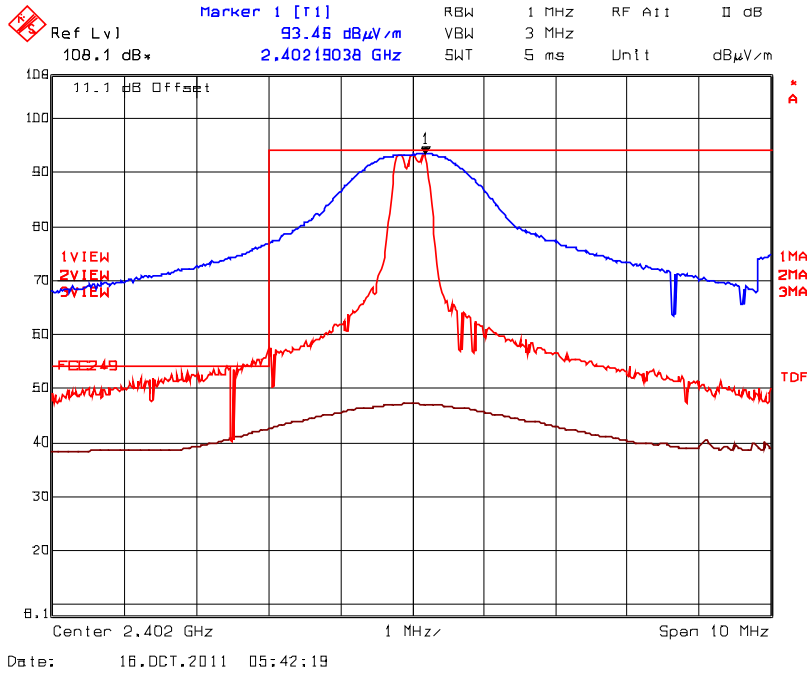

Plot 5.7.4.4. Band-Edge RF Radiated Emissions @ 3 m, Continuous Mode
 Low End of Frequency Band, 2402 MHz, Rx Antenna Orientation: Vertical

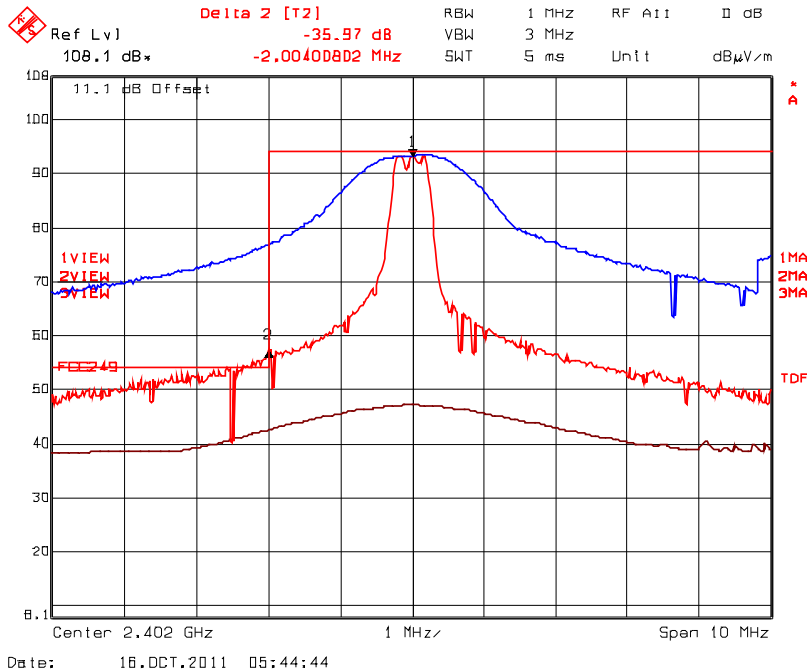


Trace 1: RBW= 1 MHz, VBW= 3 MHz

Trace 2: RBW= 100 kHz, VBW= 300 kHz, Delta (Peak to Band-Edge): 35.97dB


Trace 3: RBW= 1 MHz, VBW= 10 Hz

Peak Band-Edge at 2400 MHz: Peak= 93.46dBuV/m – 35.97dB= 57.49dBuV/m < (Limit 74 dBuV/m)

Plot 5.7.4.5. Band-Edge RF Radiated Emissions @ 3 m, Continuous Mode
 High End of Frequency Band, 2480 MHz, Rx Antenna Orientation: Horizontal

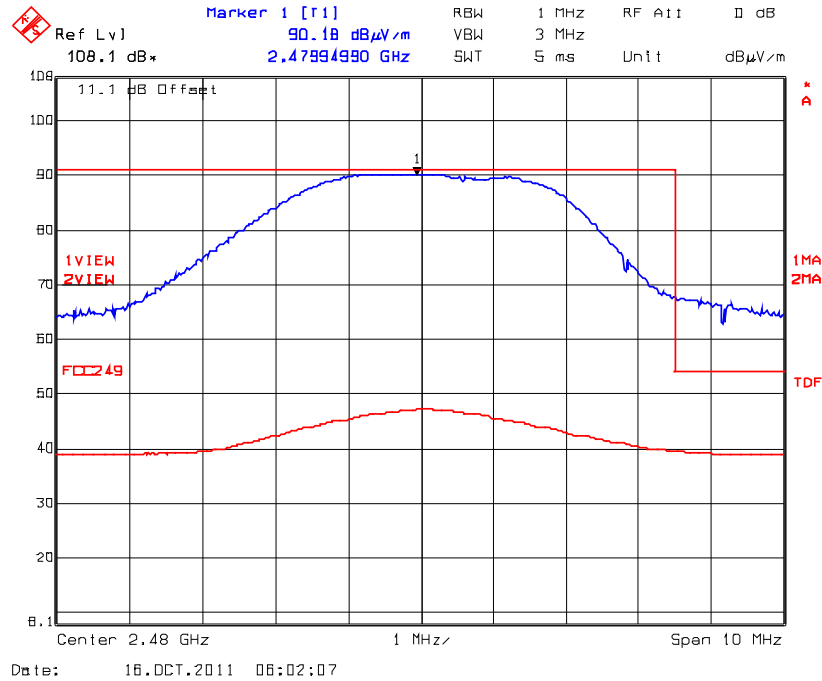

Plot 5.7.4.6. Band-Edge RF Radiated Emissions @ 3 m, Continuous Mode
 High End of Frequency Band, 2480 MHz, Rx Antenna Orientation: Vertical

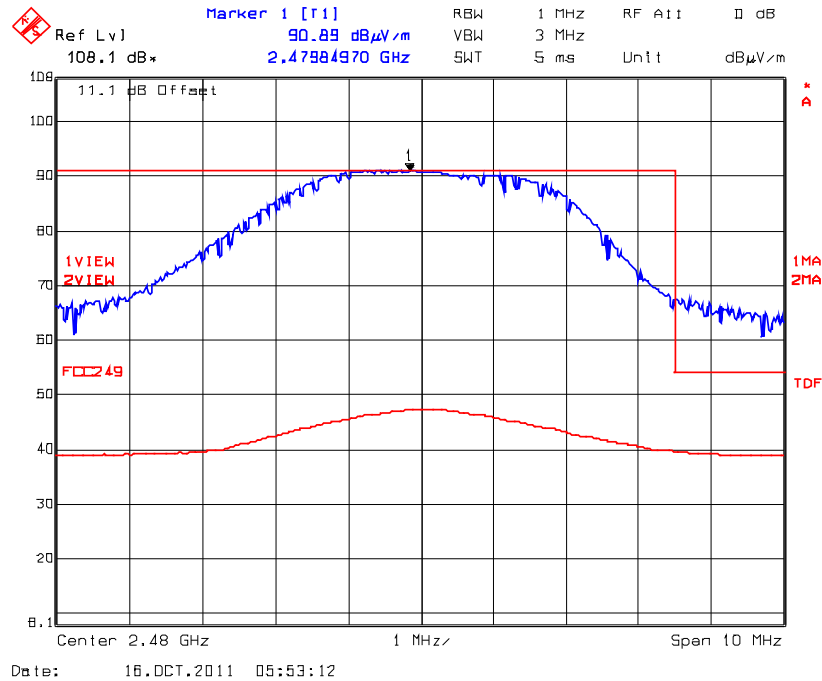

Trace 1: RBW = 1 MHz, VBW = 3 MHz

Trace 2: RBW = 1 MHz, VBW = 10 Hz

Peak Band-Edge at 2483.5 MHz: well below Limit of 74 dBuV/m as shown in the above plots

EXHIBIT 6. TEST EQUIPMENT LIST

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	ESU40	100037	20 Hz – 40 GHz	15 Mar 2012
Spectrum Analyzer	Rohde & Schwarz	FSEK30	100077	20 Hz – 40 GHz	27 Sep 2012
RF Amplifier	Hewlett Packard	84498	3008A00769	1 – 26.5 GHz	4 Aug 2012
RF Amplifier	AH System	PAM-0118	225	20 MHz – 18 GHz	15 Mar 2012
RF Amplifier	Com-Power	PA-103A	161243	10 MHz – 1 GHz	23 Feb. 2012
Signal Generator	Hewlett Packard	8648C	3443U00391	100 kHz – 3200 MHz	16 Dec, 2011
Signal Generator	Hewlett Packard	83752B	3610A00457	0.01 – 20 GHz	19 Oct , 2011
Horn Antenna	ETS-Lindgren	360-09	00118385	18 – 26.5 GHz	30 May 2012
Horn Antenna	Emco	3115	5955	1 – 18 GHz	09 Jan 2012
Horn Antenna	Emco	3115	6570	1 – 18 GHz	22 Feb 2012
Biconi-Log Antenna	Emco	3142C	00034792	26 – 3000 MHz	26 April 2012
Log Periodic	ETS-Lindgren	93148	1101	200 – 2000 MHz	04 Jan 2012
Attenuator	Narda	4768-20	-	DC – 40 GHz (2w)	Cal. on use
Attenuator	Narda	4768-10	-	DC – 40 GHz (2w)	Cal. on use
DC-Block	Hewlett Packard	11742A	12460	0.045-26.5 GHz	Cal. on use
High Pass Filter	K & L	11SH10-4000/1200	4	Cut off 2400 MHz	Cal. on use

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.15	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.30	± 5.2

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.39	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.78	± 5.2

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.87	Under consideration
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.75	Under consideration