

FCC Test Report

Report No.: AGC00798220601FE02

FCC ID	:	Z4C-ML85
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Headphone
BRAND NAME	:	MINELAB
MODEL NAME	:	ML85
APPLICANT	:	Minelab Electronics Pty Ltd
DATE OF ISSUE	:	Aug. 02, 2022
STANDARD(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0
<u>Attestation of (</u>	<u>710</u>	bootal Compliance (Shenzhen) Co., Ltd





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 02, 2022	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	7
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF TESTED SYSTEM	10
5.2. EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	17
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	24
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	24
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	



10.1. MEASUREMENT PROCEDURE	37
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	37
10.3. MEASUREMENT EQUIPMENT USED	37
10.4. LIMITS AND MEASUREMENT RESULT	37
11. RADIATED EMISSION	41
11.1. MEASUREMENT PROCEDURE	41
11.2. TEST SETUP	42
11.3. LIMITS AND MEASUREMENT RESULT	43
11.4. TEST RESULT	43
12. LINE CONDUCTED EMISSION TEST	57
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	57
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	57
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
	58
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	58 58
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	58 58 59



1. VERIFICATION OF COMPLIANCE

Applicant	Minelab Electronics Pty Ltd		
Address	2 Second Avenue, Mawson Lakes, South Australia, 5095, Australia		
Manufacturer	Shenzhen Rambo Weiye Electronic Co., Ltd		
Address	3A03, Block 1, 182 Design Park, NO 182, Bulan Rd, Buji Longgang district, Shenzhen China		
Factory	Shenzhen Rambo Weiye Electronic Co., Ltd		
Address	3A03, Block 1, 182 Design Park, NO 182, Bulan Rd, Buji Longgang district, Shenzhen China		
Product Designation	Wireless Headphone		
Brand Name	MINELAB		
Test Model	ML85		
Date of test	Jun. 06, 2022 to Aug. 02, 2022		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-BLE/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By zhan Eder Zhan Aug. 02, 2022 (Project Engineer) Reviewed By Calvin Liu Aug. 02, 2022 (Reviewer) Approved By

Max Zhang (Authorized Officer)

Aug. 02, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86–755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Wireless Headphone". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz	
RF Output Power	1M: -0.561dBm (Max) 2M: -0.547dBm (Max)	
Bluetooth Version	V5.2	
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE ⊠GFSK 1Mbps ⊠GFSK 2Mbps	
Number of channels	40 Channels	
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)	
Antenna Gain	1dBi	
Hardware Version	v4.0	
Software Version	0.2.0+3	
Power Supply	DC 3.7V by battery or DC 5V by adapter	

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number Frequency	
2400~2483.5MHz	0	2402 MHz
	1	2404 MHz
	:	:
	38	2478 MHz
	39	2480 MHz



2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for FCC ID: Z4C-ML85 filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	1M Low channel TX
2	1M Middle channel TX
3	1M High channel TX
4	2M Low channel TX
5	2M Middle channel TX
6	2M High channel TX

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

🛸 Direct Test Mode Tool			_	×
Menu				
Common Configuration	┌ ^{Transmit Ra}			
COM Port	Tx Power			
Port Number COM3 Refresh	Pavload Mo			
- Node				
Iransmitter O Receiver	Fayload Le			
	Common Radi	o Control.		
Single channel Multiple channels	Run Time			. ms
Channel 0				
	РНҮ		LE 1Mbps	
	「 ^{Receiver Ra}]
	Received P			
	Packet Err			
Log Lv. INFO				
08:39:59 INFO> ####################################	****			
08:40:52 INFO> Start Transmitter Test 08:40:52 INFO> Port PHY Length	Power	Channel		Ĩ
08:40:52 INFO> COM3 1 37	2 rower	Channel O		
08:40:52 INFO> Start TX				
08:40:52 ERROR> (Set Tx power) Event Error 08:40:55 INFO> Start Transmitter Test				
08:40:55 INFO> Fort PHY Length	Power	Channel		
08:40:55 INFO> COM3 1 37				
08:40:56 INFO> Start TX 08:40:56 INFO> ####################################				
08:40:56 INFO> ####################################	*****			
08:40:56 INFO> ####################################	******			
Nordic Semiconductor				Close
Wordie Jewiconductor				close



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:

EUT

Conducted Emission Configure:

EUT	AE

5.2. EQUIPMENT USED IN TESTED SYSTEM

ltem	Equipment	Model No.	ID or Specification	Remark
1	Wireless Headphone	ML85	Z4C-ML85	EUT
2	Adapter	K-T10E0502000E		AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



6. TEST FACILITY

Test software

Test Site	Attestation of G	Attestation of Global Compliance (Shenzhen) Co., Ltd				
Location		1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China				
Designation Number	CN1259					
FCC Test Firm Registration Number	975832	975832				
A2LA Cert. No.	5054.02	5054.02				
Description	Attestation of G	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA				
TEST EQUIPMENT OF	CONDUCTED E	MISSION TEST				
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due	
TEST RECEIVER	R&S	ESPI	101206	Mar.28, 2022	Mar.27, 2023	
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2022	Jun. 08, 2023	

ES-K1(Ver.V1.71)

N/A

N/A

N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

R&S

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2022	Mar. 22, 2024
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW≥DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

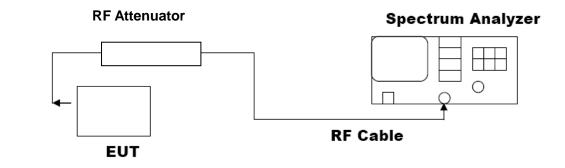



7.3. LIMITS AND MEASUREMENT RESULT 1M

Test Data of Conducted Output Power					
Test ModeTest Channel (MHz)Peak Power (dBm)Limits (dBm)Pass or Fail					
	2402	-1.262	≪30	Pass	
GFSK 1M	2440	-0.737	≪30	Pass	
	2480	-0.561	≤30	Pass	


2M

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)Peak Power (dBm)Limits (dBm)Pass or Fail				
	2402	-1.281	≪30	Pass	
GFSK 2M	2440	-0.756	≪30	Pass	
	2480	-0.547	≪30	Pass	


Test Graphs of Conducted Output Power






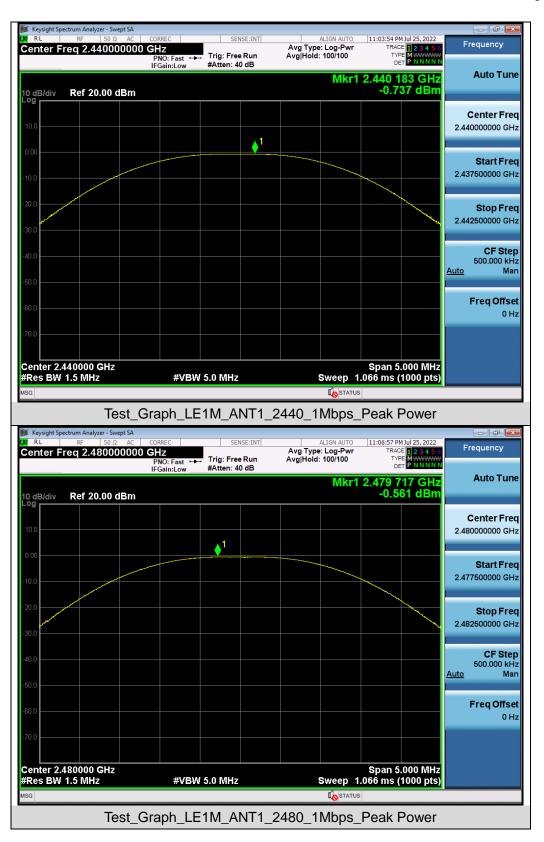



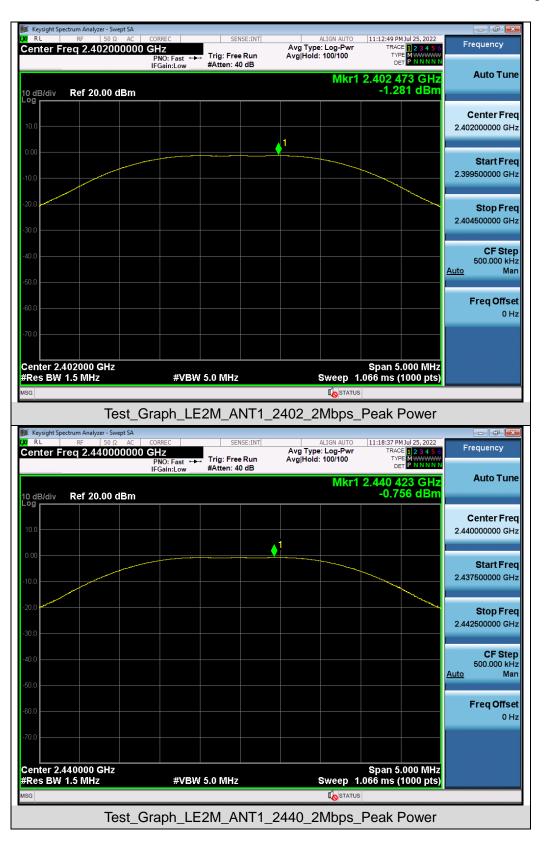









8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW \ge 3×RBW.

4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
 Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS

- 1	NЛ
	IVI

Test Data of Occupied Bandwidth and DTS Bandwidth						
Test Mode	ode Test Channel 99% Occupied -6dB Limits (MHz) Pass or Fail					
	2402	1.046	0.685	≥0.5	Pass	
GFSK 1M	2440	1.050	0.687	≥0.5	Pass	
	2480	1.053	0.688	≥0.5	Pass	

2M

Test Data of Occupied Bandwidth and DTS Bandwidth						
Test Mode	Test ModeTest Channel (MHz)99% Occupied Bandwidth (MHz)-6dB Bandwidth (MHz)Limits (MHz)Pass or Fail					
	2402	2.069	1.129	≥0.5	Pass	
GFSK 2M	2440	2.085	1.122	≥0.5	Pass	
	2480	2.081	1.116	≥0.5	Pass	


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd






Test Graphs of Occupied Bandwidth







Test_Graph_LE1M_ANT1_2480_1Mbps_OBW

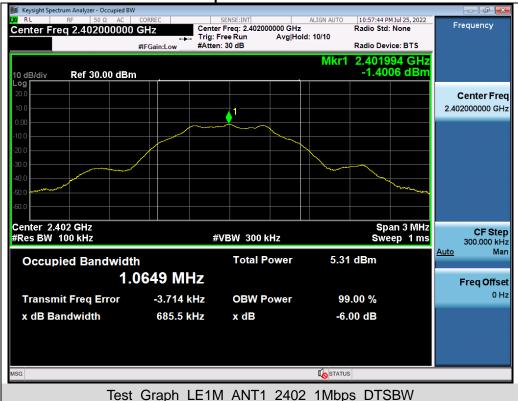


Test Graphs of DTS Bandwidth








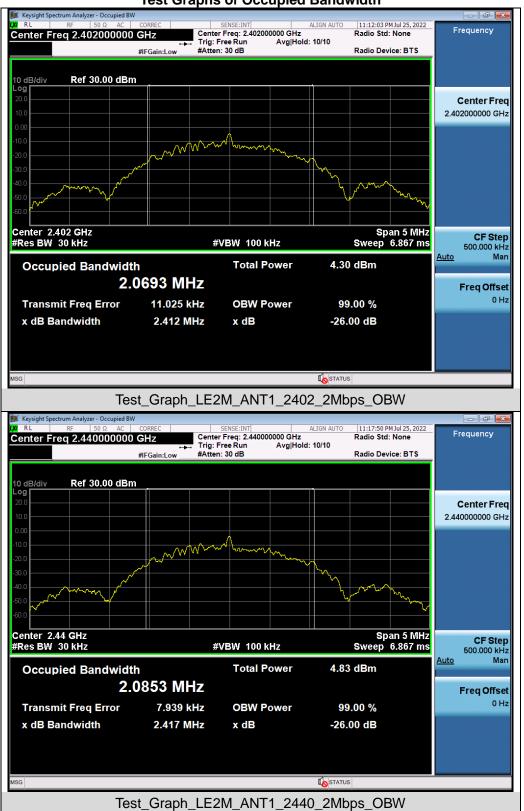


Test Graphs of Occupied Bandwidth







Test_Graph_LE2M_ANT1_2480_2Mbps_OBW

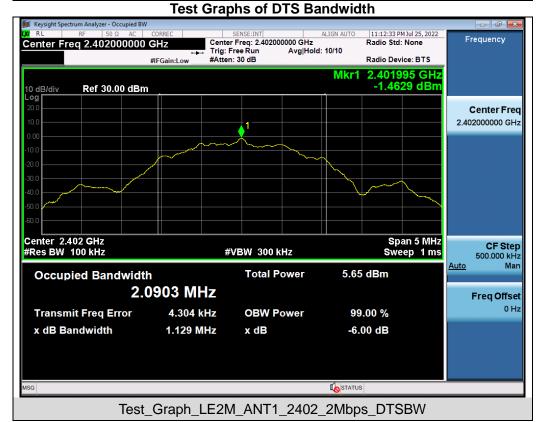







9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT					
Angliaghta Limite	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			




10:59:03 PM Jul 25, 2022 Frequency Center Freq 2.402000000 GHz Avg Type: Log-Pwr Avg|Hold: 10/10 TACE 1 2 3 4 5 TYPE MWWWW DET PNNNN Trig: Free Run PNO: Wide #Atten: 30 dB Mkr1 2.401 991 9 GHz -1.376 dBm Auto Tune I0 dB/div Ref 20.00 dBm **Center Freq** 2.402000000 GHz 1 Start Freq 2 400500000 GHz Stop Freq 2.403500000 GHz CF Step 300.000 kHz Auto Man **Freq Offset** 0 Hz Center 2.402000 GHz #Res BW 100 kHz Span 3.000 MHz #VBW 300 kHz Sweep 2.000 ms (30000 pts) Test_Graph_LE1M_ANT1_2402_1Mbps_Reference Level Ke + SA 10:59:18 PM Jul 25, 2022 SENSE:INT Frequency Avg Type: Log-Pwi Avg|Hold: 10/10 Center Freq 1.210000000 GHz Trig: Free Run #Atten: 30 dB TYPE DET PNO: Fast IFGain:Low Auto Tune Mkr1 2.337 92 GHz -53.149 dBm 10 dB/div Ref 20.00 dBm Center Freg 1.210000000 GHz Start Freq 30.000000 MHz Stop Freq 2.39000000 GHz CF Step 236.00000 MHz Auto Man **Freq Offset** 0 Hz Stop 2.390 GHz Sweep 226.0 ms (30000 pts) Start 30 MHz #Res BW 100 kHz #VBW 300 kHz 🛵 STATU

1M Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph LE1M ANT1 2402 1Mbps Lower Band Emissions




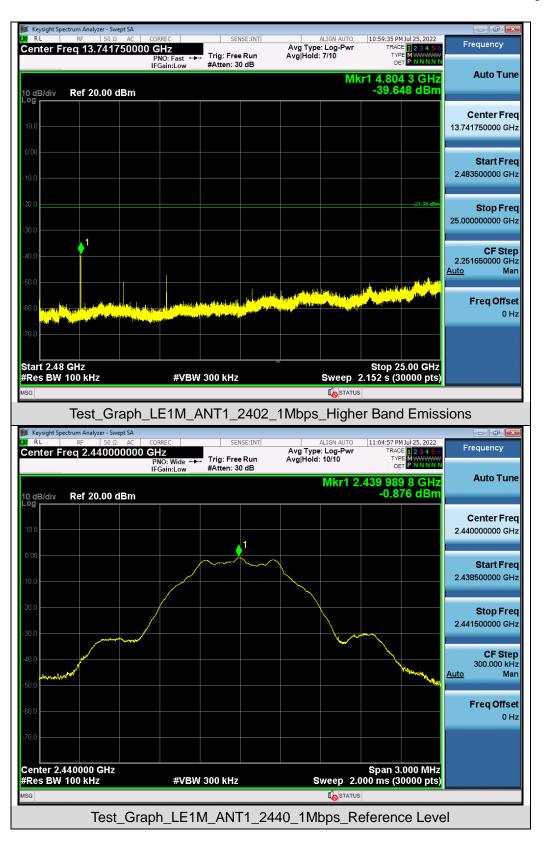




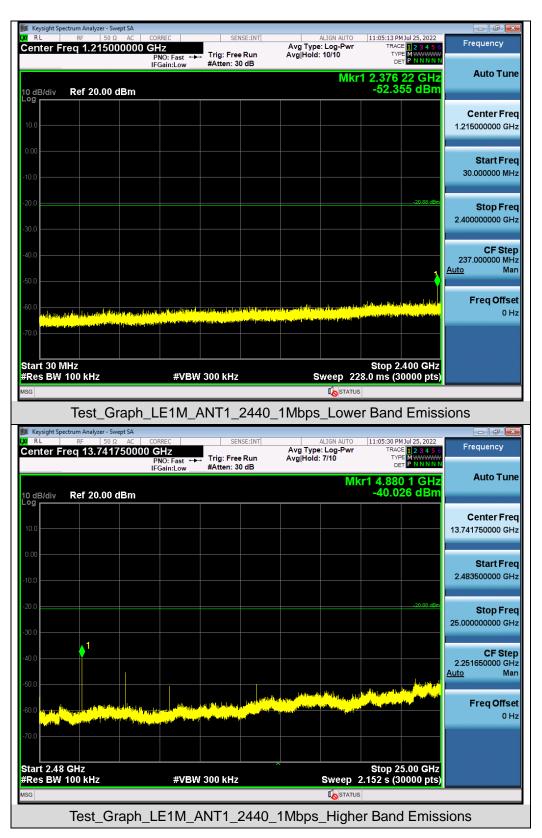



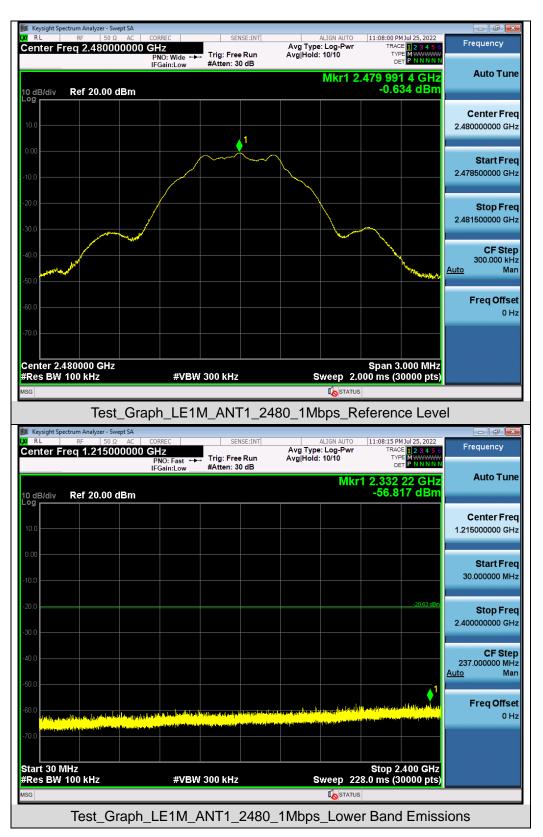



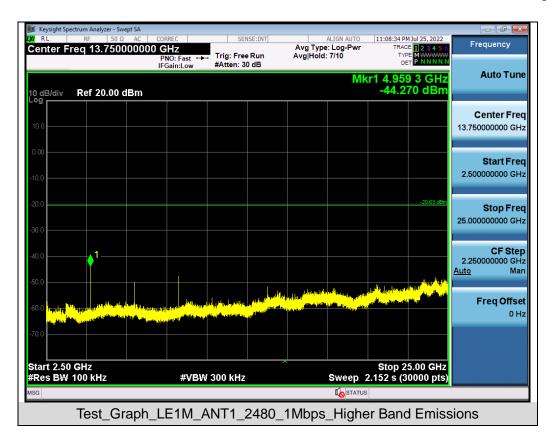




2M




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



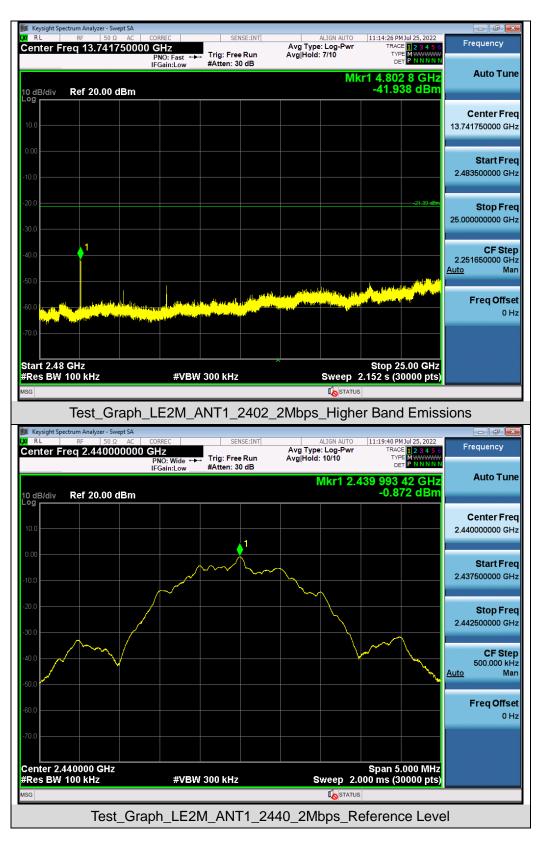




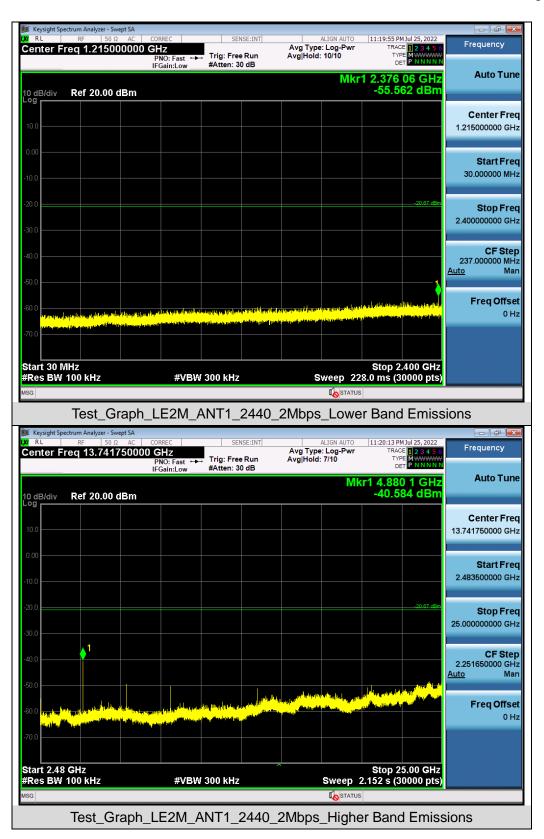








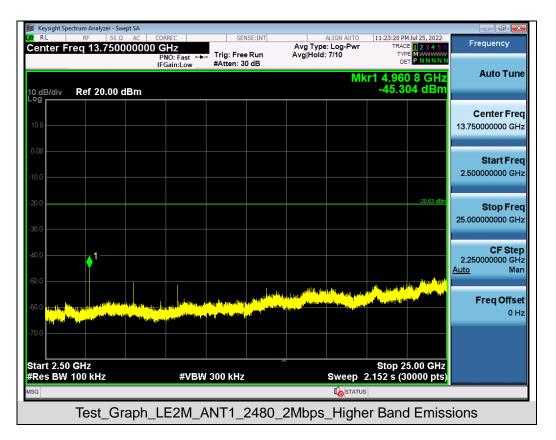



1M

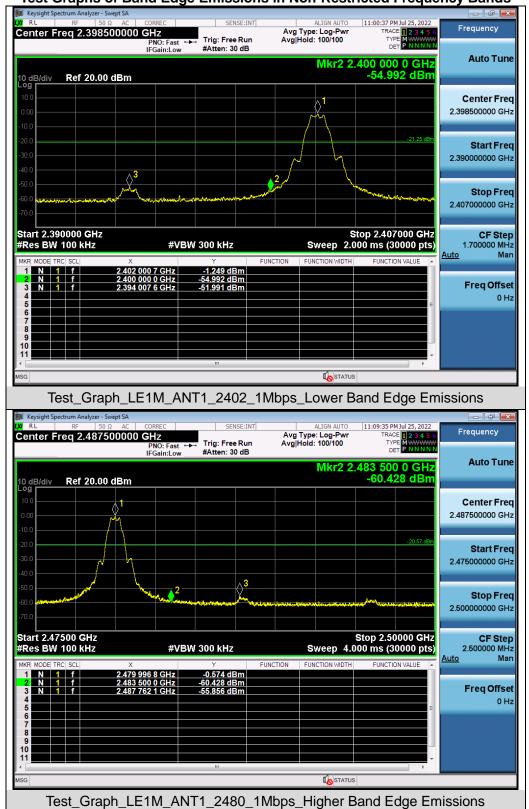

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



2M



Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT


1M

Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
	2402	-16.519	≪8	Pass		
GFSK 1M	2440	-16.064	≪8	Pass		
	2480	-15.751	≤8	Pass		

2M


Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2402	-18.799	≪8	Pass			
GFSK 2M	2440	-18.040	≤8	Pass			
	2480	-18.095	≪8	Pass			



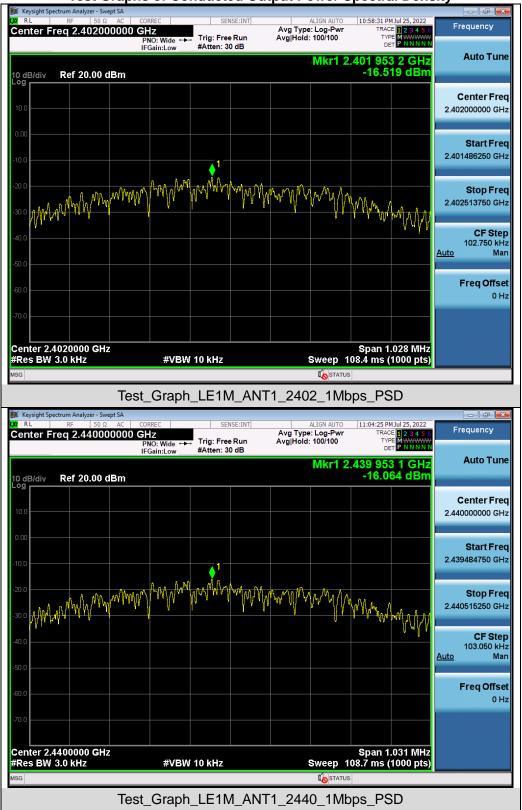


Test Graphs of Conducted Output Power Spectral Density




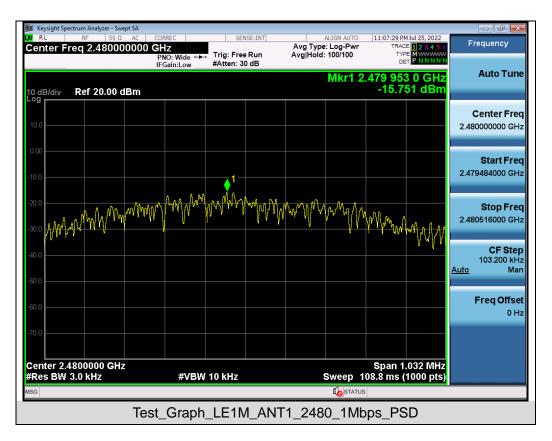

Test Graphs of Conducted Output Power Spectral Density

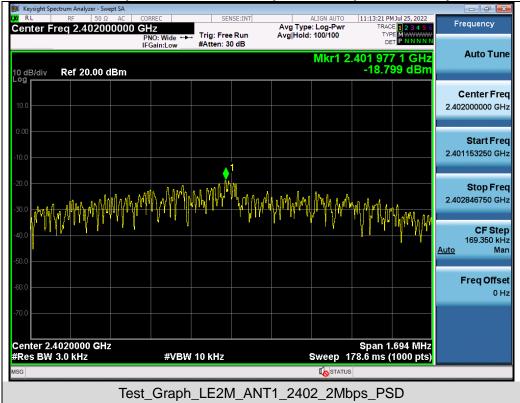



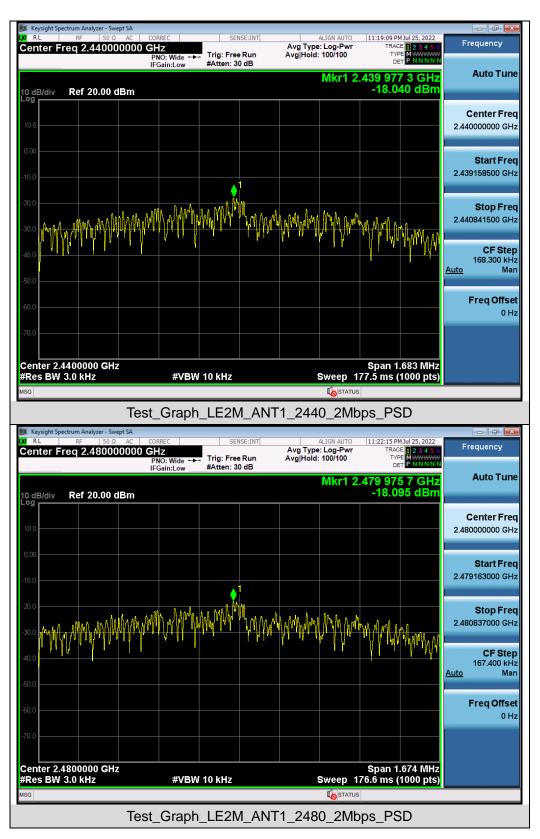




11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



11.2. TEST SETUP

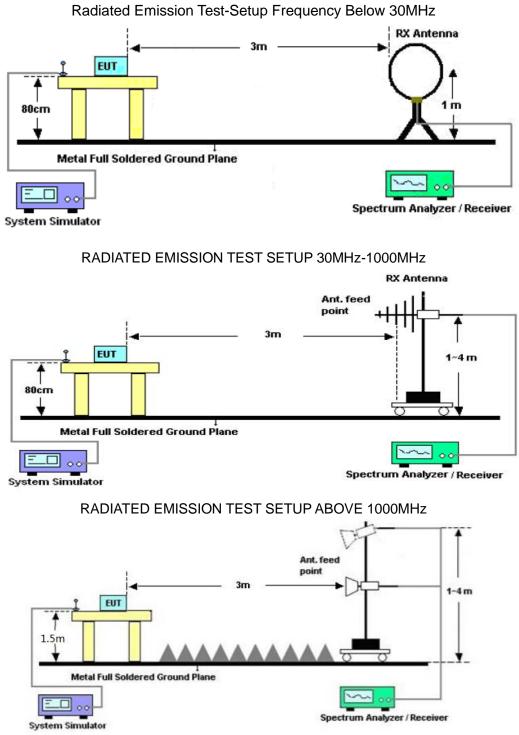



11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



EUT	Wireless Headphone	Model Name	ML85			
Temperature	25° C	Relative Humidity	55%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 3	Antenna	Horizontal			

Radiated emission from 30MHz to 1000MHz




NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.4	21.85	11.61	40.00	18.15	100	2	Horizontal
2	114.39	24.41	12.89	43.50	19.09	100	134	Horizontal
3	139.61	26.59	17.79	43.50	16.91	100	227	Horizontal
4	262.8	26.23	14.80	46.00	19.77	100	187	Horizontal
5	316.15	31.98	15.11	46.00	14.02	100	280	Horizontal
6	359.8	27.39	16.22	46.00	18.61	100	42	Horizontal

RESULT: PASS



EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

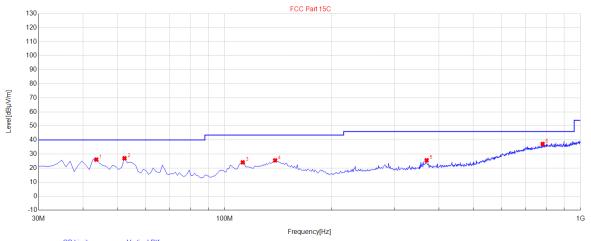

QP Limit
 Vertical PK
 QP Detector

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.58	26.04	11.07	40.00	13.96	100	147	Vertical
2	52.31	26.98	11.49	40.00	13.02	100	84	Vertical
3	112.45	24.07	13.93	43.50	19.43	100	203	Vertical
4	138.64	25.48	19.58	43.50	18.02	100	167	Vertical
5	369.5	25.56	16.49	46.00	20.44	100	3	Vertical
6	782.72	37.18	31.04	46.00	8.82	100	183	Vertical

RESULT: PASS Note:

1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test patterns are tested. 1M's Mode 3 is the worst case and documented in the report.



RADIATED EMISSION ABOVE 1GHZ

EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4804.000	43.43	0.08	43.51	74	-30.49	peak	
4804.000	35.36	0.08	35.44	54	-18.56	AVG	
7206.000	38.68	2.21	40.89	74	-33.11	peak	
7206.000	31.27	2.21	33.48	54	-20.52	AVG	
Remark:					1	1	
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.				

EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	44.38	0.08	44.46	74	-29.54	peak
4804.000	34.87	0.08	34.95	54	-19.05	AVG
7206.000	38.26	2.21	40.47	74	-33.53	peak
7206.000	30.62	2.21	32.83	54	-21.17	AVG
emark:						



EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	44.67	0.14	44.81	74	-29.19	peak
4880.000	35.72	0.14	35.86	54	-18.14	AVG
7320.000	39.73	2.36	42.09	74	-31.91	peak
7320.000	31.55	2.36	33.91	54	-20.09	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	45.15	0.14	45.29	74	-28.71	peak
4880.000	38.08	0.14	38.22	54	-15.78	AVG
7320.000	40.46	2.36	42.82	74	-31.18	peak
7320.000	32.45	2.36	34.81	54	-19.19	AVG
Remark:	•		-		•	
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	44.69	0.22	44.91	74	-29.09	peak
4960.000	35.43	0.22	35.65	54	-18.35	AVG
7440.000	38.78	2.64	41.42	74	-32.58	peak
7440.000	29.45	2.64	32.09	54	-21.91	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	42.97	0.22	43.19	74	-30.81	peak
4960.000	34.06	0.22	34.28	54	-19.72	AVG
7440.000	38.69	2.64	41.33	74	-32.67	peak
7440.000	29.75	2.64	32.39	54	-21.61	AVG
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	amplifier.			

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

All test patterns are tested. 1M is the worst case and documented in the report.




		1M	
Test result for	or band edge	emission	at restricted b

Test result for band edge emission at restricted bands				
EUT	Wireless Headphone	Model Name	ML85	
Temperature	25° C	Relative Humidity	55%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 1	Antenna	Horizontal	

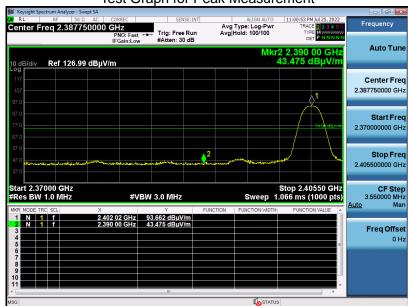

Test Graph for Peak Measurement

Test Graph for Average Measurement

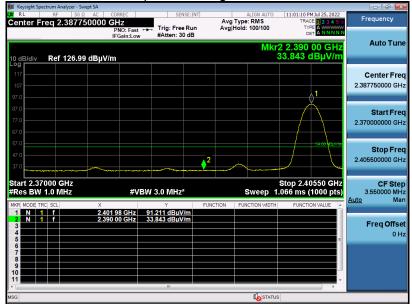


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Test Graph for Peak Measurement

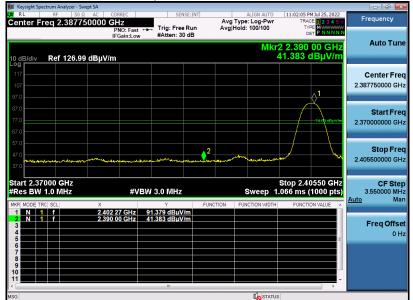

Test Graph for Average Measurement

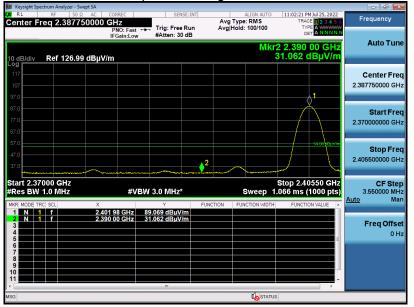

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




Report No.: AGC00798220601FE02 Page 51 of 61

EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Test Graph for Peak Measurement

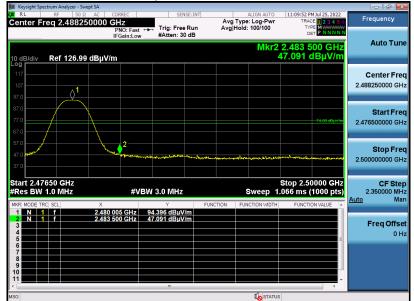

Test Graph for Average Measurement

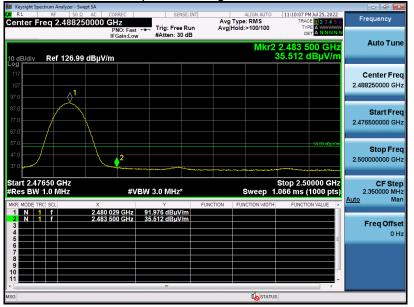


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Test Graph for Peak Measurement

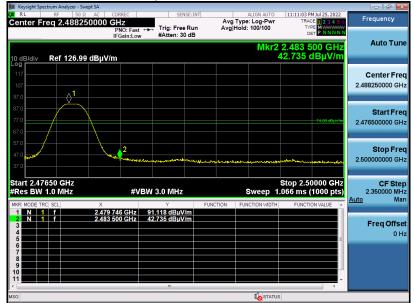

Test Graph for Average Measurement

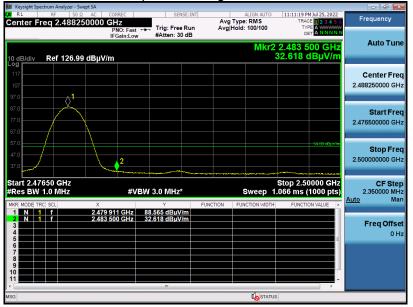

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




2	NЛ
	IVI


	_	
Test result for band edge	emission at restricted bands	

EUT	Wireless Headphone	Model Name ML85	
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal



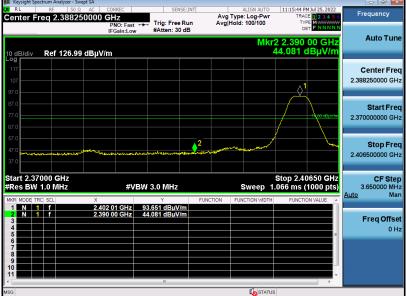

Test Graph for Average Measurement

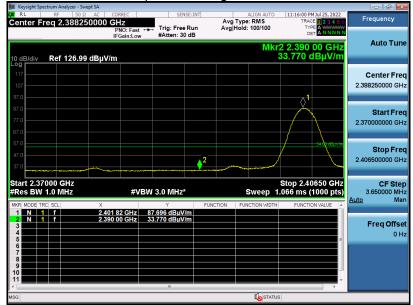

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




Report No.: AGC00798220601FE02 Page 54 of 61

EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Test Graph for Peak Measurement

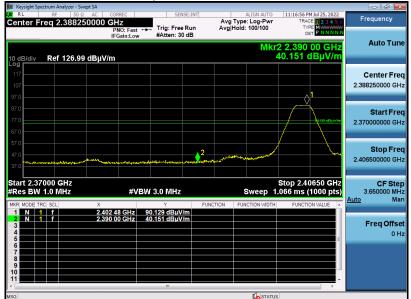

Test Graph for Average Measurement

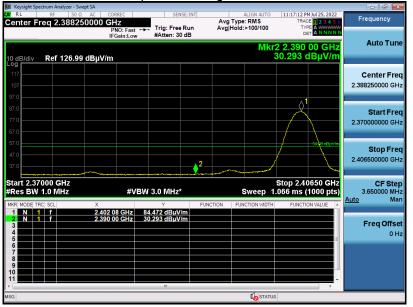

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




Report No.: AGC00798220601FE02 Page 55 of 61

EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

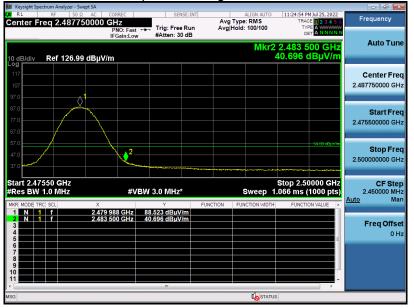


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	Wireless Headphone	Model Name	ML85
Temperature	25° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Test Graph for Peak Measurement

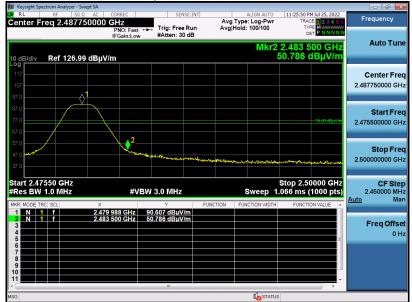

Test Graph for Average Measurement

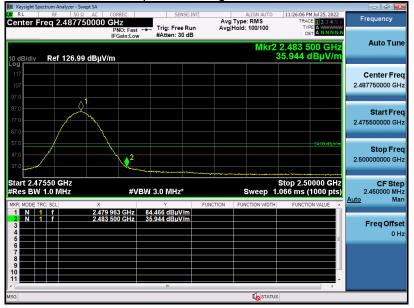

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

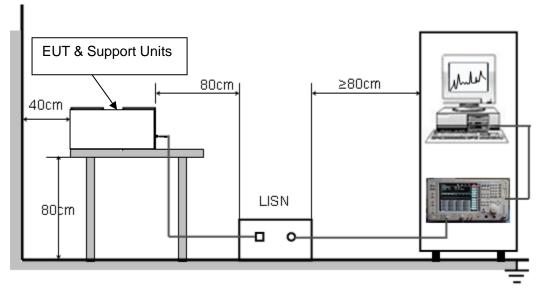



12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



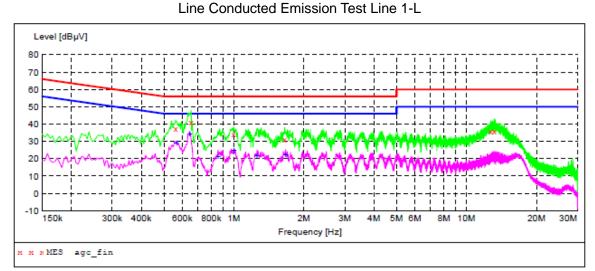

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

MEASUREMENT RESULT: "agc fin"

2022/6/10 1	4:46					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.562000	37.60 41.20	5.4	56 56	18.4 14.8	QP	L1 L1
0.998000 1.654000	34.40 30.90	5.4 6.2	56 56		QP	L1 L1
12.722000 13.182000	35.60 35.60	7.7 7.9	60 60	24.4 24.4	QP QP	L1 L1

MEASUREMENT RESULT: "agc_fin2"

2022/6/10	14:46					
Frequenc MH	-	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.56600	0 29.00	5.4	46	17.0	AV	L1
0.64600	0 34.30	5.4	46	11.7	AV	L1
0.85400	0 21.10	5.4	46	24.9	AV	L1
1.00200	0 24.70	5.4	46	21.3	AV	L1
1.25800	0 21.80	5.8	46	24.2	AV	L1
1.67000	0 22.50	6.2	46	23.5	AV	L1

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/





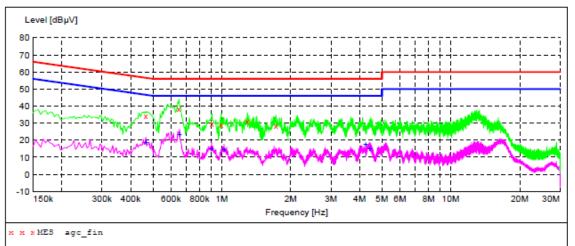

MEASUREMENT RESULT: "agc_fin"

2022/6/10 14:	49					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.466000	34.20	5.5	57	22.4	QP	N
0.650000	38.50	5.4	56	17.5	QP	N
0.906000	29.80	5.4	56	26.2	QP	N
0.994000	29.20	5.4	56	26.8	QP	N
1.294000	31.10	5.8	56	24.9	QP	N
1.722000	28.60	6.3	56	27.4	QP	Ν

MEASUREMENT RESULT: "agc fin2"

2022/6/10	14:49					
Frequency MH:	-	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.466000	0 18.70	5.5	47	27.9	AV	N
0.654000	23.40	5.4	46	22.6	AV	N
0.902000	0 15.10	5.4	46	30.9	AV	N
1.022000	0 14.50	5.5	46	31.5	AV	N
4.242000	0 17.50	6.5	46	28.5	AV	N
4.422000	0 15.10	6.5	46	30.9	AV	Ν

RESULT: PASS

All test patterns are tested. 1M's Mode 3 is the worst case and documented in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC00798220601AP03

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC00798220601AP04

----END OF REPORT----



Conditions of Issuance of Test Reports

 All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
 Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.