SGS

SGS-CSTC Standards Technical Services Ltd.

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: Fax: Email: +86 (0) 755 2601 2053 +86 (0) 755 2671 0594 ee.shenzhen@sgs.com

Report No.: SZEM140800475308 Page: 1 of 120

FCC REPORT

| Application No: | SZEM1408004753RF |
|------------------|----------------------------------|
| Applicant: | Seeed Technology Limited |
| Manufacturer: | Seeed Technology Limited |
| Factory: | Seeed Technology Limited |
| Product Name: | LinkIt ONE |
| Model No.(EUT): | Linklt ONE v1.0 |
| Trade Mark: | LinkIt ONE |
| FCC ID: | Z4T-LINKITONEV10 |
| Standards: | 47 CFR Part 15, Subpart C (2013) |
| Date of Receipt: | 2014-09-09 |
| Date of Test: | 2014-10-17 to 2014-10-28 |
| Date of Issue: | 2014-12-12 |
| Test Result: | PASS * |

.* In the configuration tested, the EUT complied with the standards specified above. This report supersedes our previous report SZEM140800475303, issued on 2014-11-24, which is hereby deemed null and void.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140800475308 Page: 2 of 120

2 Version

| Revision Record | | | | | | |
|-----------------|------------------------------|------------|--|----------|--|--|
| Version | Chapter Date Modifier Remark | | | | | |
| 00 | | 2014-11-24 | | Original | | |
| 01 | | 2014-12-12 | | New | | |
| | | | | | | |

| Authorized for issue by: | | |
|--------------------------|-------------------------------|------------|
| Tested By | John Hong | 2014-10-28 |
| | (Jim Huang) /Project Engineer | Date |
| Prepared By | Baluh | 2014-12-12 |
| | (Bella Ou) /Clerk | Date |
| Checked By | Owen Zhou | 2014-11-27 |
| | (Owen Zhou) /Reviewer | Date |



Report No.: SZEM140800475308 Page: 3 of 120

3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|---|--|-------------------------|--------|
| Antenna Requirement | 47 CFR Part 15, Subpart C Section 15.203/15.247 (c) | ANSI C63.10 2009 | PASS |
| AC Power Line Conducted Emission | 47 CFR Part 15, Subpart C Section 15.207 | ANSI C63.10 2009 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15, Subpart C Section 15.247 (b)(3) | KDB558074 D01 v03r02 | PASS |
| 6dB Occupied Bandwidth | 47 CFR Part 15, Subpart C Section 15.247 (a)(2) | KDB558074 D01 v03r02 | PASS |
| Power Spectral Density | 47 CFR Part 15, Subpart C Section 15.247 (e) | KDB558074 D01 v03r02 | PASS |
| Band-edge for RF Conducted Emissions | 47 CFR Part 15, Subpart C Section 15.247(d) | KDB558074 D01 v03r02 | PASS |
| RF Conducted Spurious Emissions | 47 CFR Part 15, Subpart C Section 15.247(d) | KDB558074 D01 v03r02 | PASS |
| Radiated Spurious Emissions | 47 CFR Part 15, Subpart C Section 15.205/15.209 | ANSI C63.10 2009 | PASS |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section 15.205/15.209 | ANSI C63.10 2009 | PASS |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 4 of 120

4 Contents

| | | | Page |
|---|---|--|--------------------|
| 1 | COV | /ER PAGE | |
| 2 | VER | ISION | |
| 3 | TES | T SUMMARY | |
| 4 | CON | ITENTS | |
| 5 | GEN | IERAL INFORMATION | |
| | 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 | CLIENT INFORMATION | |
| 6 | TES | T RESULTS AND MEASUREMENT DATA | |
| | 5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 <i>6.8.1</i> <i>6.8.1</i> 5.9 | | 13 17 26 |
| 7 | PHC | DTOGRAPHS - EUT TEST SETUP | 119 |
| - | 7.1 7.2 | RADIATED SPURIOUS EMISSION CONDUCTED EMISSION DTOGRAPHS - EUT CONSTRUCTIONAL DETAILS | |
| 0 | PUC | | |



Report No.: SZEM140800475308 Page: 5 of 120

5 General Information

5.1 Client Information

| Applicant: | Seeed Technology Limited |
|--------------------------|--|
| Address of Applicant: | 5th Floor, 8th Building, shilling industrial Park, XiLi Town, NanShan dist. Shenzhen, Guangdong, China |
| Manufacturer: | Seeed Technology Limited |
| Address of Manufacturer: | 5th Floor, 8th Building, shilling industrial Park, XiLi Town, NanShan dist. Shenzhen, Guangdong, China |
| Factory: | Seeed Technology Limited |
| Address of Factory: | 5th Floor, 8th Building, shilling industrial Park, XiLi Town, NanShan dist. Shenzhen, Guangdong, China |

5.2 General Description of EUT

| LinkIt ONE |
|--|
| Linklt ONE v1.0 |
| LinkIt ONE |
| IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz |
| IEEE 802.11n(HT40): 2422MHz to 2452MHz |
| IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels |
| IEEE 802.11n HT40: 7 Channels |
| 5MHz |
| IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) |
| IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) |
| IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, |
| QPSK,BPSK) |
| mobile production |
| 260MHz |
| IEEE for 802.11b: 22; IEEE for 802.11g: 20 ;IEEE for 802.11n (HT20 and HT40): 18 |
| Mediatek WIFI tool |
| Type: Dedicated |
| Gain:2dBi |
| DC 5V powered by USB |
| Type: 3.7V 1000mA Lithium polymer battery |
| DC 5V |
| 80cm (shielded) |
| 100cm (unshielded) |
| |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 6 of 120

| Operation Frequency each of channel(802.11b/g/n HT20) | | | | | | | | | | |
|---|------|-----------|-----------|------------------|---------|-----------|-----------|-----|---------|-----------|
| Channel | Fr | equency | Channe | I Frequency | Channel | Fre | Frequency | | nel | Frequency |
| 1 | 24 | 412MHz | 4 | 2427MHz | 7 | 244 | 12MHz | |) | 2457MHz |
| 2 | 24 | 417MHz | 5 | 2432MHz | 8 | 244 | 47MHz | 11 | | 2462MHz |
| 3 | 24 | 422MHz | 6 | 2437MHz | 9 | 24 | 2452MHz | | | |
| Operation F | requ | ency each | of channe | el(802.11n HT40) | | | | | | |
| Channe | l | Frequ | ency | Channel | Frequen | су | Chan | nel | | Frequency |
| 1 | | 24221 | ИНz | 4 | 2437MF | 2437MHz 7 | | | 2452MHz | |
| 2 | | 2427 | ИНz | 5 | 2442MF | łz | | | | |
| 3 | | 2432 | MHz | 6 | 2447MF | łz | | | | |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

| Channel | Frequency | | |
|---------------------|-----------|--|--|
| The Lowest channel | 2412MHz | | |
| The Middle channel | 2437MHz | | |
| The Highest channel | 2462MHz | | |

For 802.11n (HT40):

| Channel | Frequency |
|---------------------|-----------|
| The Lowest channel | 2422MHz |
| The Middle channel | 2437MHz |
| The Highest channel | 2452MHz |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 7 of 120

5.3 Test Environment and Mode

| Operating Environment: | Operating Environment: | | | |
|---------------------------|--|--|--|--|
| Temperature: | 20.0 °C | | | |
| Humidity: | 50 % RH | | | |
| Atmospheric Pressure: | 1020 mbar | | | |
| Test mode: | | | | |
| Transmitting mode: | Keep the EUT transmitting with modulation | | | |
| Charge+Transmitting mode: | Keep the EUT charging and transmitting with modulation | | | |

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM140800475308 Page: 8 of 120

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM140800475308 Page: 9 of 120

5.10 Equipment List

| | Conducted Emission | | | | | | |
|------|---------------------------------------|--|---------------------|------------------|------------------------------|--|--|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Due date (yyyy-mm-dd) | | |
| 1 | Shielding Room | ZhongYu Electron | GB-88 | SEL0042 | 2015-06-10 | | |
| 2 | LISN | Rohde & Schwarz | ENV216 | SEL0152 | 2015-10-24 | | |
| 3 | LISN | ETS-LINDGREN | 3816/2 | SEL0021 | 2015-05-16 | | |
| 4 | 8 Line ISN | Fischer Custom Communications Inc. | FCC-TLISN- T8-02 | SEL0162 | 2015-08-30 | | |
| 5 | 4 Line ISN | Fischer Custom Communications Inc. | FCC-TLISN- T4-02 | SEL0163 | 2015-08-30 | | |
| 6 | 2 Line ISN | Fischer Custom Communications Inc. | FCC-TLISN- T2-02 | SEL0164 | 2015-08-30 | | |
| 7 | EMI Test Receiver | Rohde & Schwarz | ESCI | SEL0022 | 2015-05-16 | | |
| 8 | Coaxial Cable | SGS | N/A | SEL0025 | 2015-05-29 | | |
| 9 | DC Power Supply | Zhao Xin | RXN-305D | SEL0117 | 2015-10-24 | | |
| 10 | Humidity/ Temperature Indicator | Shanhai Qixiang | ZJ1-2B | SEL0103 | 2015-10-24 | | |
| 11 | Barometer | Chang Chun | DYM3 | SEL0088 | 2015-05-16 | | |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 10 of 120

| | RE in Chamber | | | | | | |
|------|------------------------------------|--|-----------|------------------|------------------------------|--|--|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Due date (yyyy-mm-dd) | | |
| 1 | 3m Semi-Anechoic Chamber | ETS-LINDGREN | N/A | SEL0017 | 2015-06-10 | | |
| 2 | EMI Test Receiver | Agilent Technologies | N9038A | SEL0312 | 2015-09-16 | | |
| 3 | EMI Test software | AUDIX | E3 | SEL0050 | N/A | | |
| 4 | BiConiLog Antenna (26-3000MHz) | ETS-LINDGREN | 3142C | SEL0015 | 2015-10-24 | | |
| 5 | Double-ridged horn (1-18GHz) | ETS-LINDGREN | 3117 | SEL0006 | 2015-10-24 | | |
| 6 | Horn Antenna (18-26GHz) | ETS-LINDGREN | 3160 | SEL0076 | 2015-10-24 | | |
| 7 | Pre-amplifier (0.1-1300MHz) | Agilent Technologies | 8447D | SEL0053 | 2015-05-16 | | |
| 8 | Pre-Amplifier (0.1-26.5GHz) | Compliance Directions Systems Inc. | PAP-0126 | SEL0168 | 2015-10-24 | | |
| 9 | Coaxial cable | SGS | N/A | SEL0027 | 2015-05-29 | | |
| 10 | Coaxial cable | SGS | N/A | SEL0189 | 2015-05-29 | | |
| 11 | Coaxial cable | SGS | N/A | SEL0121 | 2015-05-29 | | |
| 12 | Coaxial cable | SGS | N/A | SEL0178 | 2015-05-29 | | |
| 13 | Band filter | Amindeon | 82346 | SEL0094 | 2015-05-16 | | |
| 14 | Barometer | Chang Chun | DYM3 | SEL0088 | 2015-05-16 | | |
| 15 | DC Power Supply | Zhao Xin | RXN-305D | SEL0117 | 2015-10-24 | | |
| 16 | Humidity/ Temperature Indicator | Shanhai Qixiang | ZJ1-2B | SEL0103 | 2015-10-24 | | |
| 17 | Signal Generator (10M-27GHz) | Rohde & Schwarz | SMR27 | SEL0067 | 2015-05-16 | | |
| 18 | Signal Generator | Rohde & Schwarz | SMY01 | SEL0155 | 2015-10-24 | | |
| 19 | Loop Antenna | Beijing Daze | ZN30401 | SEL0203 | 2015-06-04 | | |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 11 of 120

| | RF connected test | | | | | | |
|------|---------------------------------------|-------------------------|-----------|------------------|------------------------------|--|--|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Due date (yyyy-mm-dd) | | |
| 1 | DC Power Supply | Zhao Xin | RXN-305D | SEL0117 | 2015-10-24 | | |
| 2 | Humidity/ Temperature Indicator | HYGRO | ZJ1-2B | SEL0033 | 2015-10-24 | | |
| 3 | Spectrum Analyzer | Rohde & Schwarz | FSP | SEL0154 | 2015-10-24 | | |
| 4 | Coaxial cable | SGS | N/A | SEL0178 | 2015-05-29 | | |
| 5 | Coaxial cable | SGS | N/A | SEL0179 | 2015-05-29 | | |
| 6 | Barometer | ChangChun | DYM3 | SEL0088 | 2015-05-16 | | |
| 7 | Signal Generator | Rohde & Schwarz | SML03 | SEL0068 | 2015-05-16 | | |
| 8 | Band filter | amideon | 82346 | SEL0094 | 2015-05-16 | | |
| 9 | POWER METER | R & S | NRVS | SEL0144 | 2015-10-24 | | |
| 10 | Attenuator | Beijin feihang taida | TST-2-6dB | SEL0205 | 2015-05-16 | | |
| 11 | Power Divider(splitter) | Agilent Technologies | 11636B | SEL0130 | 2015-10-24 | | |

Note: The calibration interval is one year, all the instruments are valid.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 12 of 120

N

15

6 Test results and Measurement Data

6.1 Antenna Requirement

| Standard | | | | | | |
|--|--|--|--|--|--|--|
| requirement: | 47 CFR Part 15C Section 15.203 /247(c) | | | | | |
| 15.203 requirement: | | | | | | |
| An intentional radiator | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the | | | | | |
| responsible party shall | be used with the device. The use of a permanently attached antenna or of an | | | | | |
| antenna that uses a ur | nique coupling to the intentional radiator, the manufacturer may design the unit | | | | | |
| | na can be replaced by the user, but the use of a standard antenna jack or | | | | | |
| | electrical connector is prohibited. | | | | | |
| | 15.247(b) (4) requirement: | | | | | |
| | power limit specified in paragraph (b) of this section is based on the use of | | | | | |
| • | hal gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this | | | | | |
| | antennas of directional gain greater than 6 dBi are used, the conducted output | | | | | |
| - | onal radiator shall be reduced below the stated values in paragraphs (b)(1), | | | | | |
| • | s section, as appropriate, by the amount in dB that the directional gain of the | | | | | |
| antenna exceeds 6 dB | | | | | | |
| | O + O + O + O + O + O + O + O + O + O + | | | | | |
| | 9 6 7 7 8 8 8 8 8 8 8 8 8 8 8 8 8 | | | | | |
| The antenna is integra of the antenna is 2dBi. | Antenna N 1 2 3 4 5 6 7 8 9 10 1 2 ted on the main PCB and no consideration of replacement. The best case gain | | | | | |




Report No.: SZEM140800475308 Page: 13 of 120

| Toot Dogwiromont | 47 CEP Part 150 Section 15 (| 007 | | | |
|-----------------------|--|---------------------|-----------|---|--|
| Test Requirement: | 47 CFR Part 15C Section 15.207 | | | | |
| Test Method: | ANSI C63.10: 2009 | | | | |
| Test Frequency Range: | : 150kHz to 30MHz | | | | |
| Limit: | Frequency range (MHz) | Limit (dBuV) | | | |
| | | Quasi-peak | Average | | |
| | 0.15-0.5 | 66 to 56* | 56 to 46* | | |
| | 0.5-5 | 56 | 46 | | |
| | 5-30 | 60 | 50 | | |
| | * Decreases with the logarithn | n of the frequency. | | _ | |
| Test Procedure: | Test Procedure: 1) The mains terminal disturbance voltage test was conducted in a shielde room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to | | | | |
| | | | | | |

6.2 Conducted Emissions



Report No.: SZEM140800475308 Page: 14 of 120

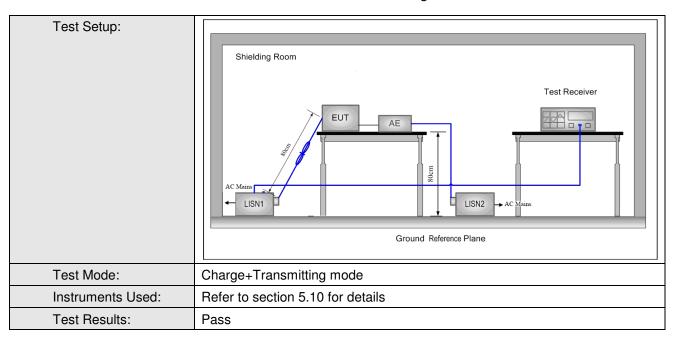

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



9


10

11

12

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140800475308 Page: 15 of 120

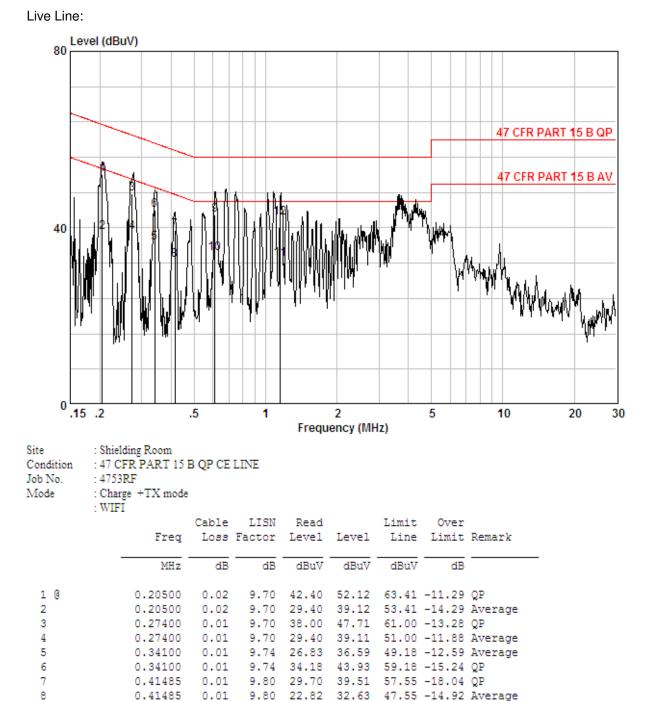

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

42.98

34.14

9.80 32.50 42.32 56.00 -13.68 QP

56.00 -13.02 QP

33.02 46.00 -12.98 Average

46.00 -11.86 Average

0.02

0.02

0.02

0.02

9.80

9.80

33.16

24.32

9.80 23.20

0.61075

0.61075

1.150


1.150



Neutral Line:

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140800475308 Page: 16 of 120

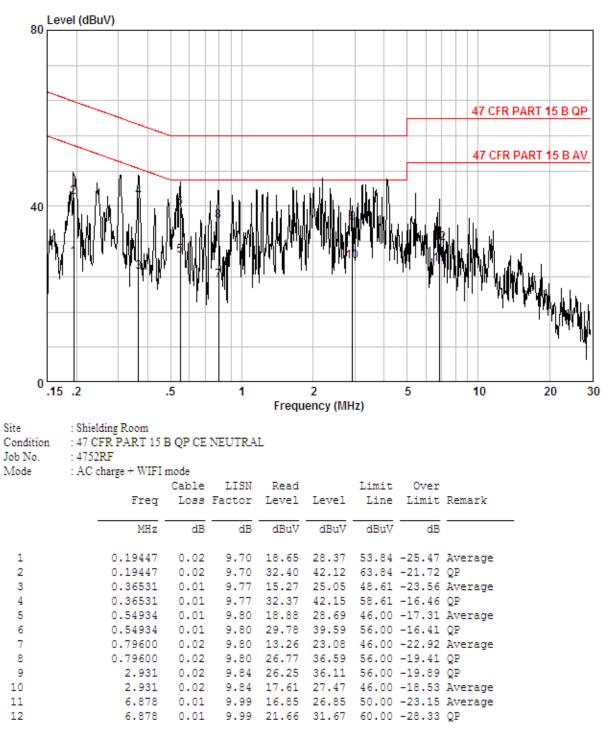

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140800475308 Page: 17 of 120

6.3 Conducted Peak Output Power

| Test Requirement: | 47 CFR Part 15C Section 15.247 (b)(3) | | |
|------------------------|--|--|--|
| Test Method: | KDB558074 D01 v03r02 | | |
| Test Setup: | Spectrum Analyzer E.U.T Non-Conducted Table | | |
| | Ground Reference Plane | | |
| | Remark: | | |
| | Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. | | |
| Test Instruments: | Refer to section 5.10 for details | | |
| Exploratory Test Mode: | Transmitting mode | | |
| Final Test Mode: | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; | | |
| | 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case | | |
| | of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40) | | |
| Limit: | 30dBm | | |
| Test Results: | Pass | | |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 18 of 120

| Pre-scan under all rate at lowest channel 1 | | | | | | | | |
|--|---------------|--------|----------|--------|--------|---------|-----------|---------|
| Mode | 802.11b | | | | | | | |
| Data Rate | 1Mbps | 2Mbps | 5.5Mbps | 11Mbps | | | | |
| Power (dBm) | 18.79 | 18.56 | 18.42 | 18.03 | | | | |
| Mode | 802.11g | | | | | | | |
| Data Rate | 6Mbps | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps |
| Power (dBm) | 19.06 | 18.28 | 18.32 | 18.47 | 18.45 | 18.50 | 18.52 | 18.58 |
| Mode | 802.11n(HT20) | | | | | | | |
| Data Rate | 6.5Mbps | 13Mbps | 19.5Mbps | 26Mbps | 39Mbps | 52Mbps | 58.5Mbps | 65Mbps |
| Power (dBm) | 17.07 | 16.87 | 16.85 | 16.49 | 16.35 | 16.41 | 16.45 | 16.32 |
| Mode | 802.11n(HT40) | | | | | | | |
| Data Rate | 13.5Mbps | 27Mbps | 40.5Mbps | 54Mbps | 81Mbps | 108Mbps | 121.5Mbps | 135Mbps |
| Power (dBm) | 16.79 | 16.25 | 16.28 | 16.05 | 15.89 | 15.99 | 15.78 | 15.61 |
| Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). | | | | | | | | |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140800475308 Page: 19 of 120

| measurement Data | | | | | |
|-------------------|-------------------------|---------------------------------------|--------|--|--|
| 802.11b mode | | | | | |
| Test channel | Peak Output Power (dBm) | ak Output Power (dBm) Limit (dBm) Res | | | |
| Lowest | 18.79 30.00 | | Pass | | |
| Middle | 18.06 30.00 Pass | | Pass | | |
| Highest | 18.05 | 30.00 | Pass | | |
| | 802.11g mc | de | | | |
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result | | |
| Lowest | 19.06 | 30.00 | Pass | | |
| Middle | 18.59 | 30.00 | Pass | | |
| Highest | 18.16 | 30.00 | Pass | | |
| 802.11n(HT20)mode | | | | | |
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result | | |
| Lowest | 17.07 | 30.00 | Pass | | |
| Middle | 16.40 | 30.00 | Pass | | |
| Highest | 16.29 | 30.00 | Pass | | |
| 802.11n(HT40)mode | | | | | |
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result | | |
| Lowest | 16.79 | 30.00 | Pass | | |
| Middle | 16.58 | 30.00 | Pass | | |
| Highest | 16.54 | 30.00 | Pass | | |

Measurement Data




Report No.: SZEM140800475308 Page: 20 of 120

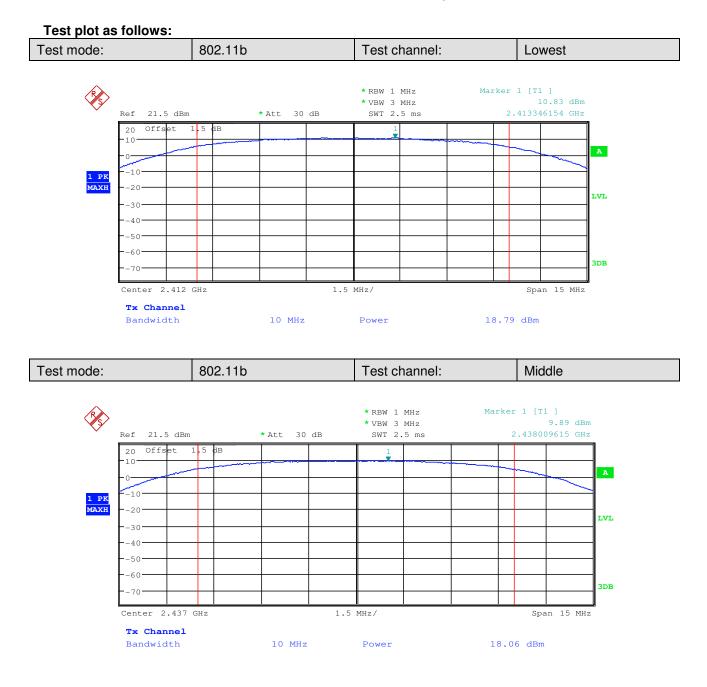




Report No.: SZEM140800475308 Page: 21 of 120

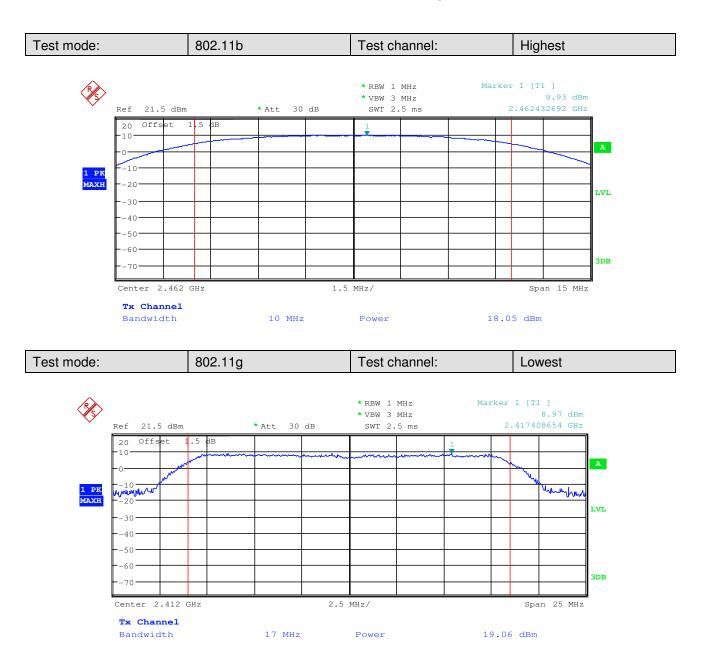




Report No.: SZEM140800475308 Page: 22 of 120

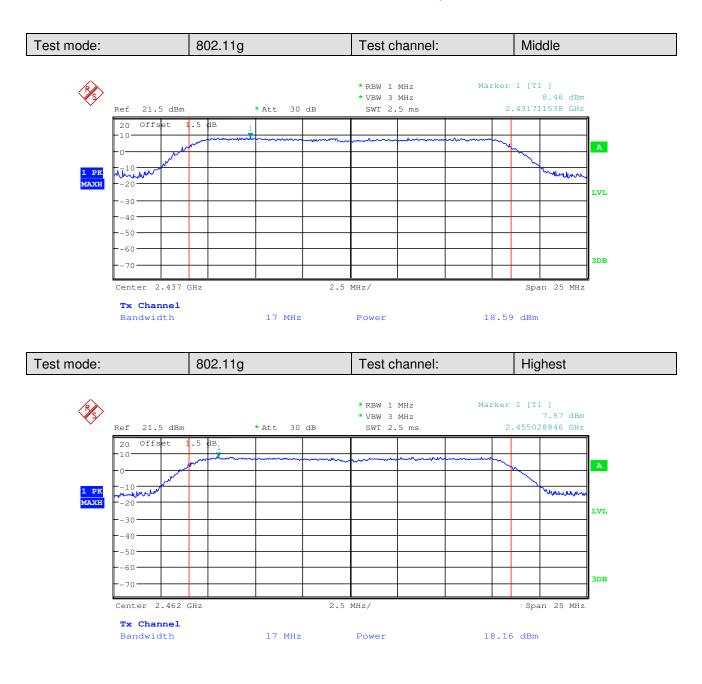






Report No.: SZEM140800475308 Page: 23 of 120

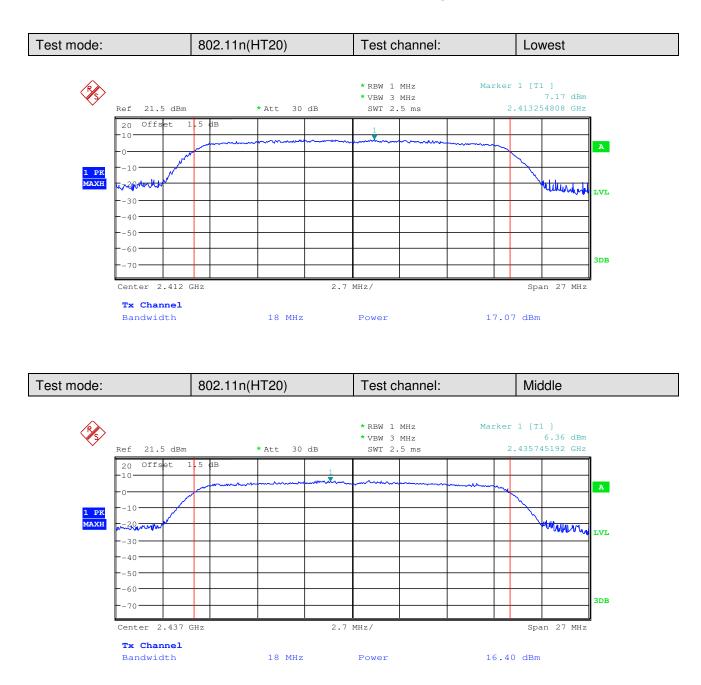




Report No.: SZEM140800475308 Page: 24 of 120

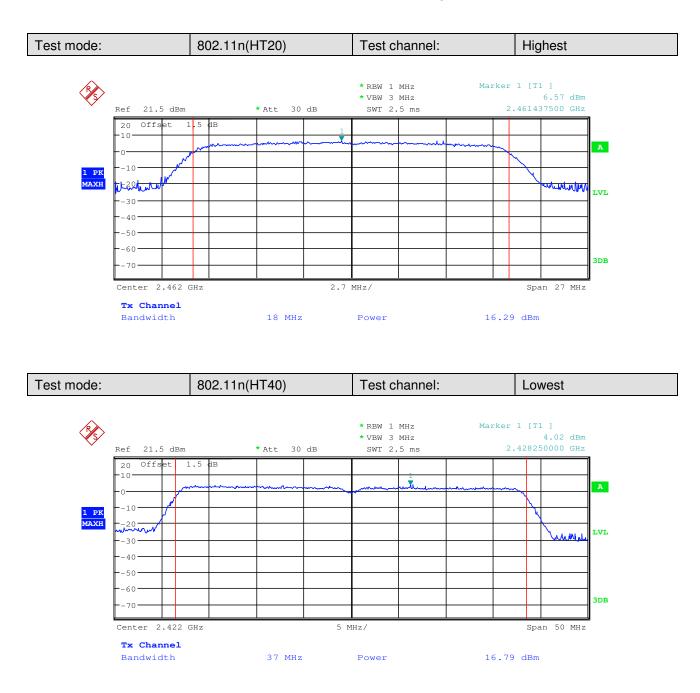



Report No.: SZEM140800475308 Page: 25 of 120

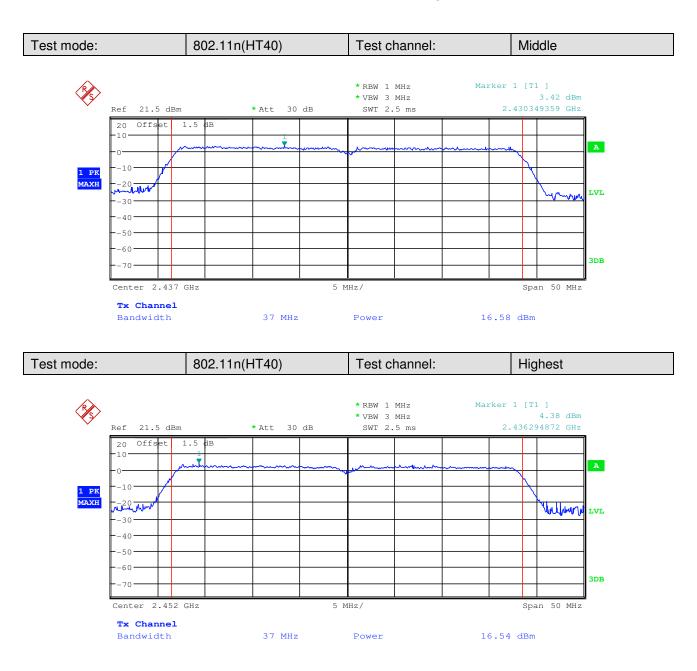



Report No.: SZEM140800475308 Page: 26 of 120

6.4 6dB Occupy Bandwidth

| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(2) | | |
|---|---|--|--|
| Test Method: | KDB558074 D01 v03r02 | | |
| Test Setup: | Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane | | |
| Instruments Used: | Refer to section 5.10 for details | | |
| Exploratory Test Mode: | Transmitting mode | | |
| Final Test Mode: Through Pre-scan, find the 1Mbps of rate is the worst case of 802.1 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the case 6.5Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the | | | |
| Limit: | ≥ 500 kHz | | |
| Test Results: | Pass | | |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140800475308 Page: 27 of 120

Measurement Data 802.11b mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result 9.5192 Lowest ≥500 Pass Middle 9.7596 ≥500 Pass Highest 9.4712 ≥500 Pass 802.11g mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result Lowest 16.5865 ≥500 Pass Middle 16.5865 ≥500 Pass Highest 16.5865 ≥500 Pass 802.11n(HT20) mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result 17.7404 Lowest ≥500 Pass Middle 17.8365 ≥500 Pass Highest 17.7885 ≥500 Pass 802.11n(HT40)mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result Lowest 36.6186 ≥500 Pass Middle 36.6026 ≥500 Pass Highest 36.5865 ≥500 Pass




Report No.: SZEM140800475308 Page: 28 of 120

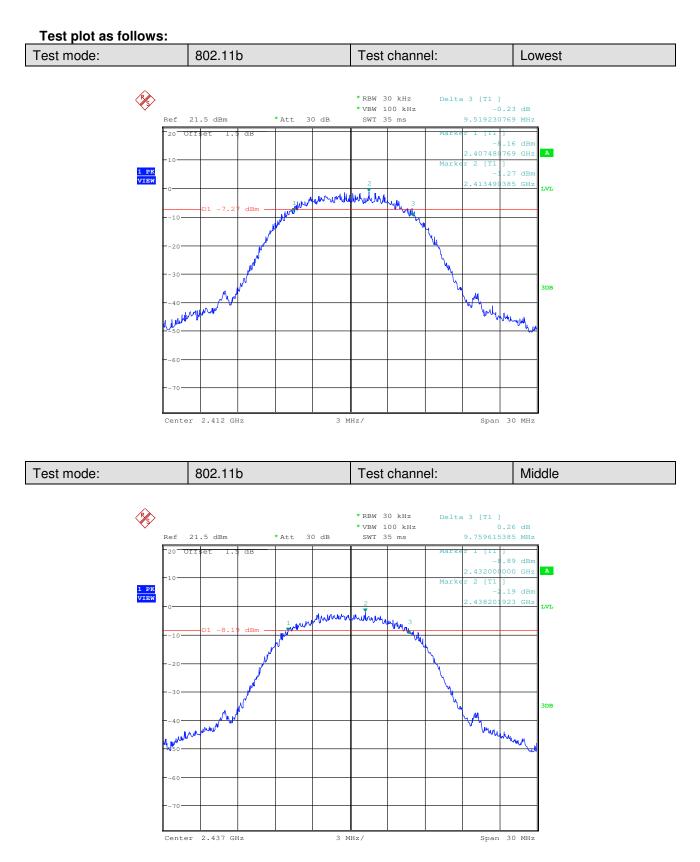




Report No.: SZEM140800475308 Page: 29 of 120

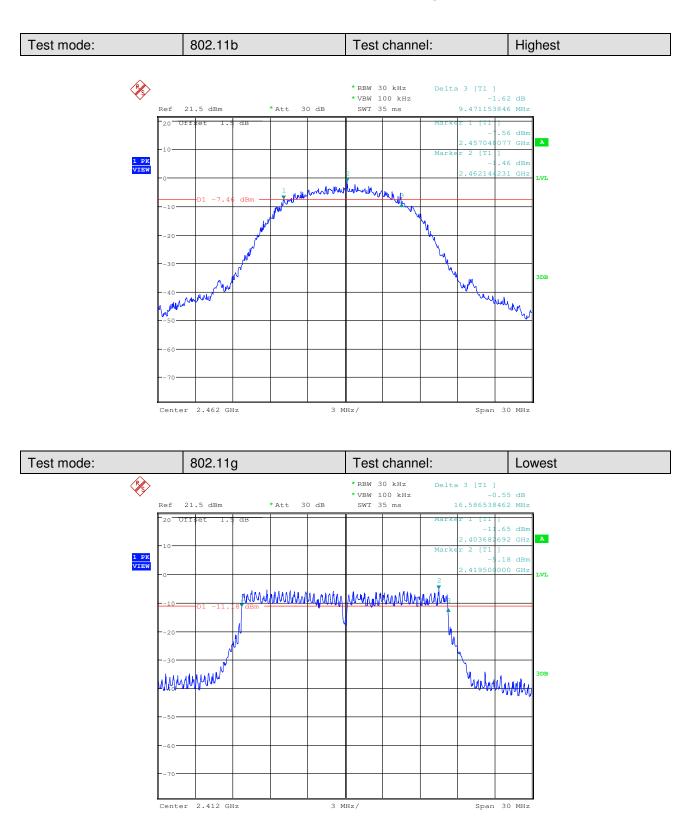




Report No.: SZEM140800475308 Page: 30 of 120

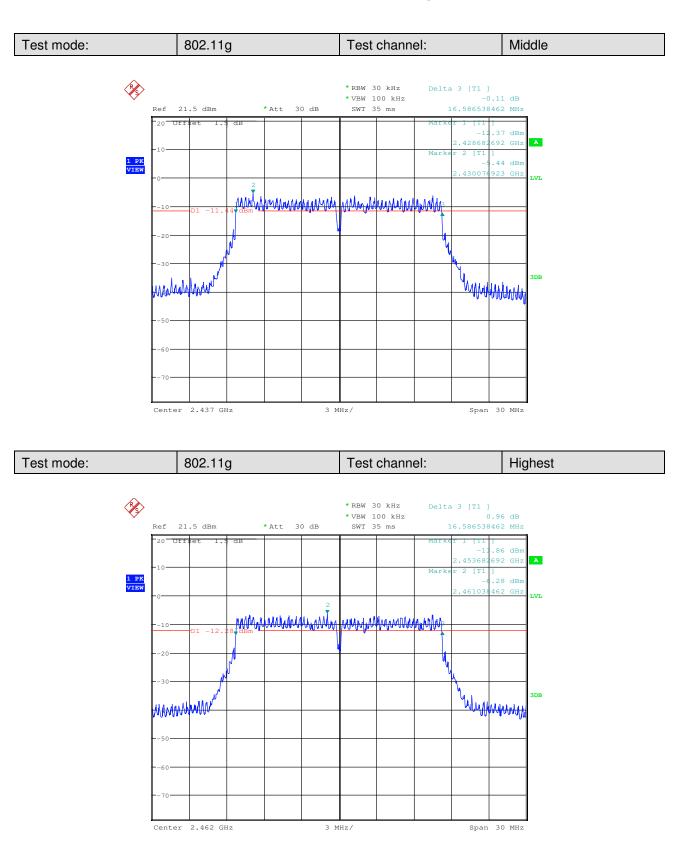




Report No.: SZEM140800475308 Page: 31 of 120

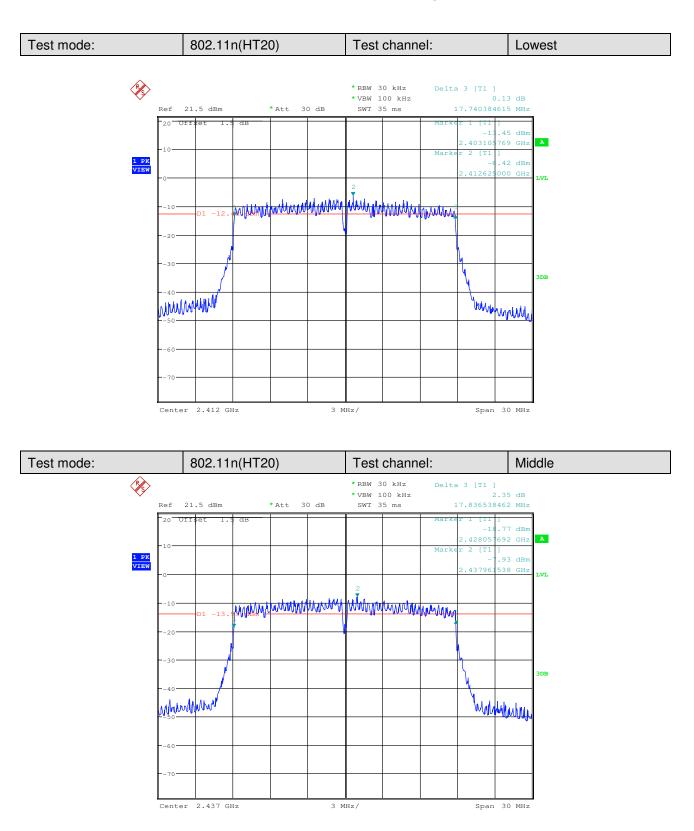




Report No.: SZEM140800475308 Page: 32 of 120

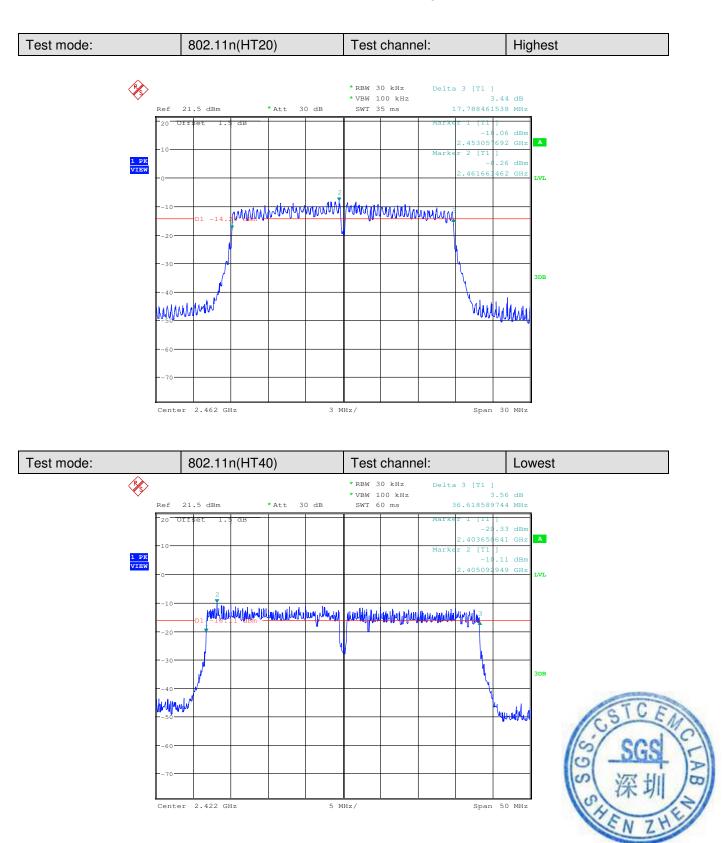



Report No.: SZEM140800475308 Page: 33 of 120

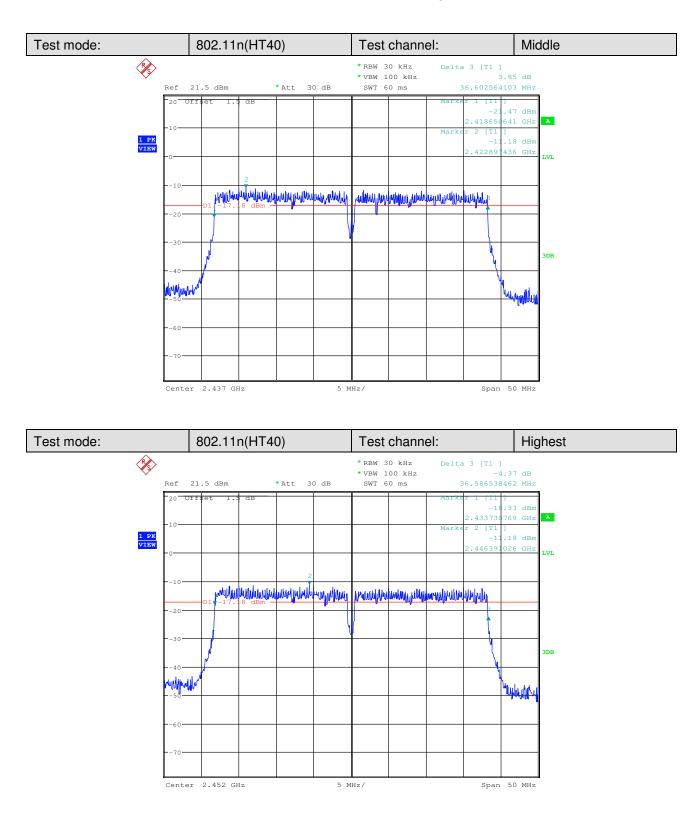



Report No.: SZEM140800475308 Page: 34 of 120

6.5 Power Spectral Density

| Test Requirement: | 47 CFR Part 15C Section 15.247 (e) | | | |
|------------------------|---|--|--|--|
| Test Method: | KDB558074 D01 v03r02 | | | |
| Test Setup: | Spectrum Analyzer E.U.T Non-Conducted Table | | | |
| | Ground Reference Plane | | | |
| | Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. | | | |
| Test Instruments: | Refer to section 5.10 for details | | | |
| Exploratory Test Mode: | Transmitting mode | | | |
| Final Test Mode: | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; | | | |
| | 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case | | | |
| | of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40) | | | |
| Limit: | ≤8.00dBm | | | |
| Test Results: | Pass | | | |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140800475308 Page: 35 of 120

Measurement Data 802.11b mode Test channel Power Spectral Density (dBm) Limit (dBm) Result -10.72 Lowest ≤8.00 Pass Middle -11.96 ≤8.00 Pass Highest -11.64 ≤8.00 Pass 802.11g mode Test channel Power Spectral Density (dBm) Limit (dBm) Result Lowest -16.18 ≤8.00 Pass Middle -16.68 ≤8.00 Pass -17.15 Highest ≤8.00 Pass 802.11n(HT20) mode Test channel Power Spectral Density (dBm) Limit (dBm) Result Lowest -18.57 ≤8.00 Pass Middle -18.87 ≤8.00 Pass Highest -19.21 ≤8.00 Pass 802.11n(HT40) mode Test channel Power Spectral Density (dBm) Limit (dBm) Result Lowest -22.42 ≤8.00 Pass Middle -22.92 ≤8.00 Pass Highest ≤8.00 -23.18 Pass




Report No.: SZEM140800475308 Page: 36 of 120

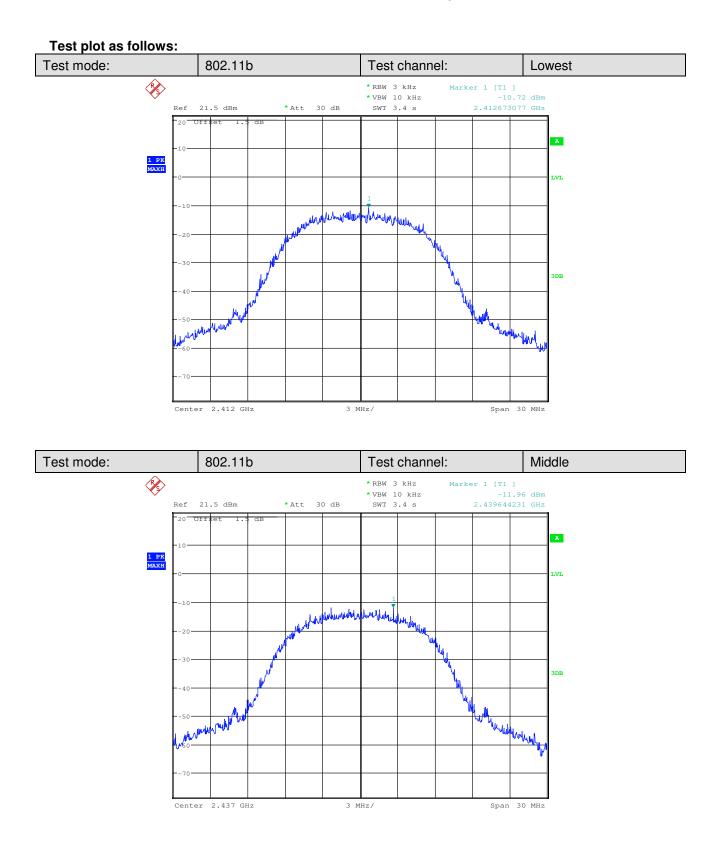




Report No.: SZEM140800475308 Page: 37 of 120

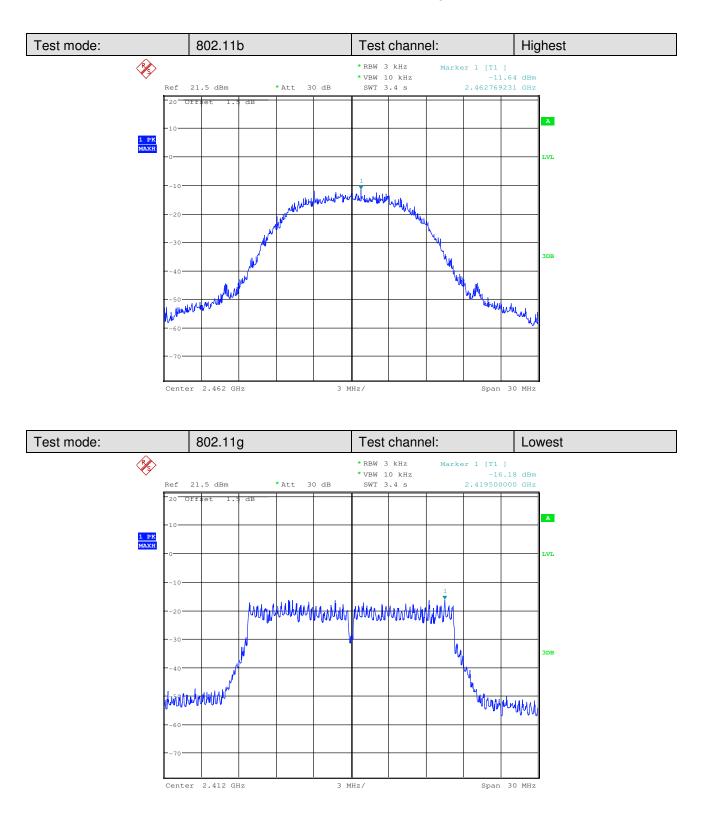




Report No.: SZEM140800475308 Page: 38 of 120

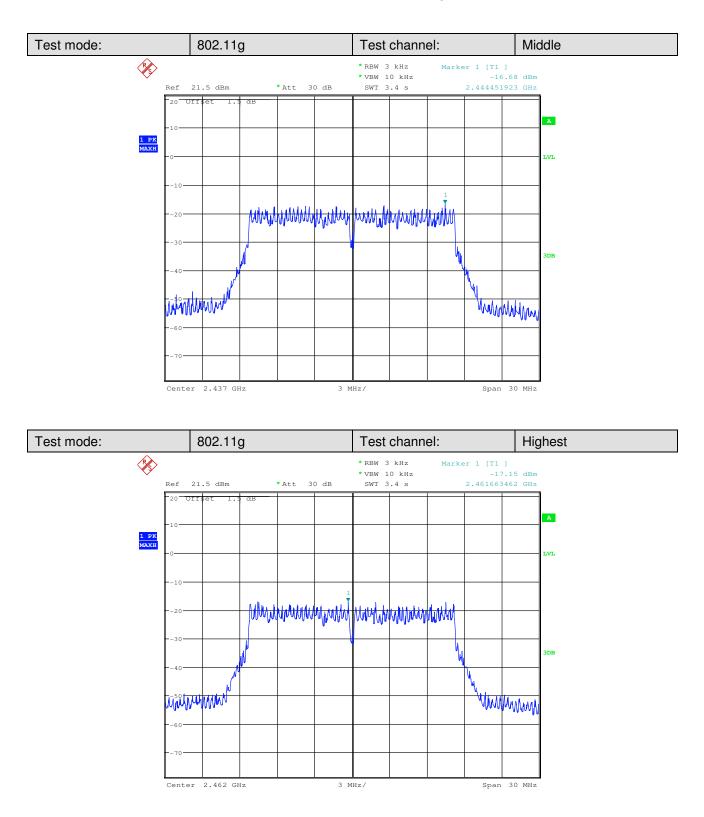




Report No.: SZEM140800475308 Page: 39 of 120

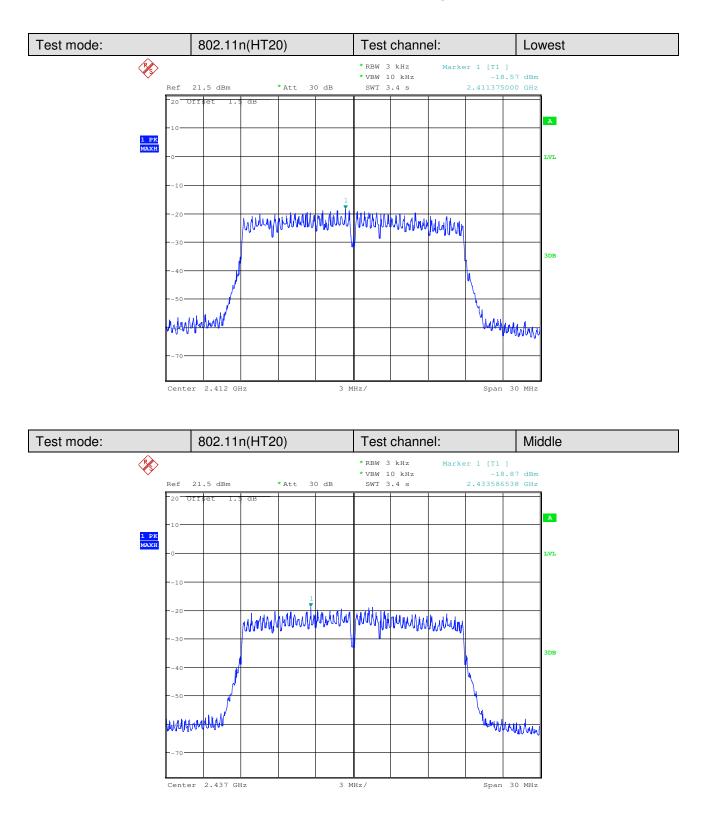




Report No.: SZEM140800475308 Page: 40 of 120

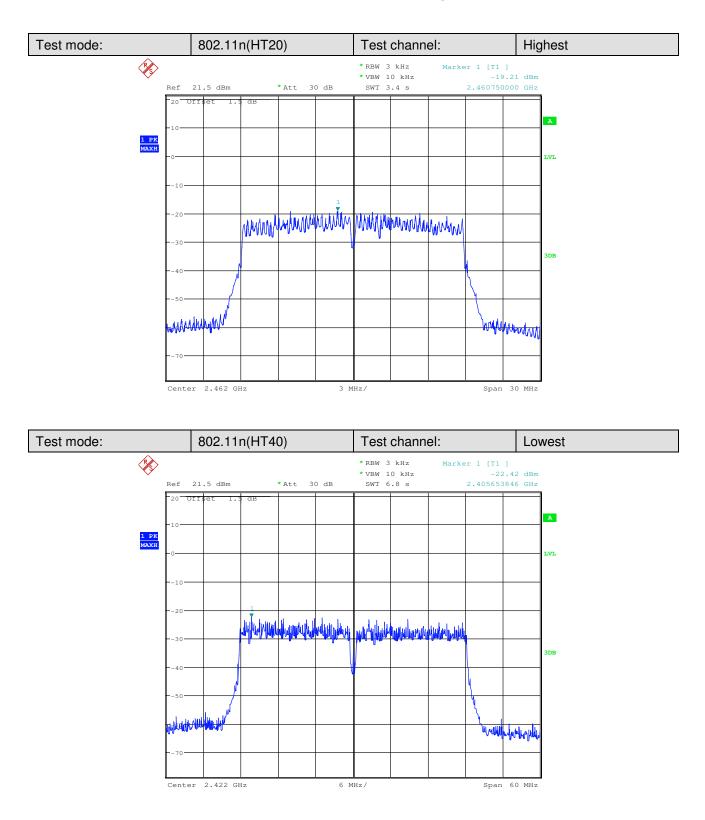



Report No.: SZEM140800475308 Page: 41 of 120

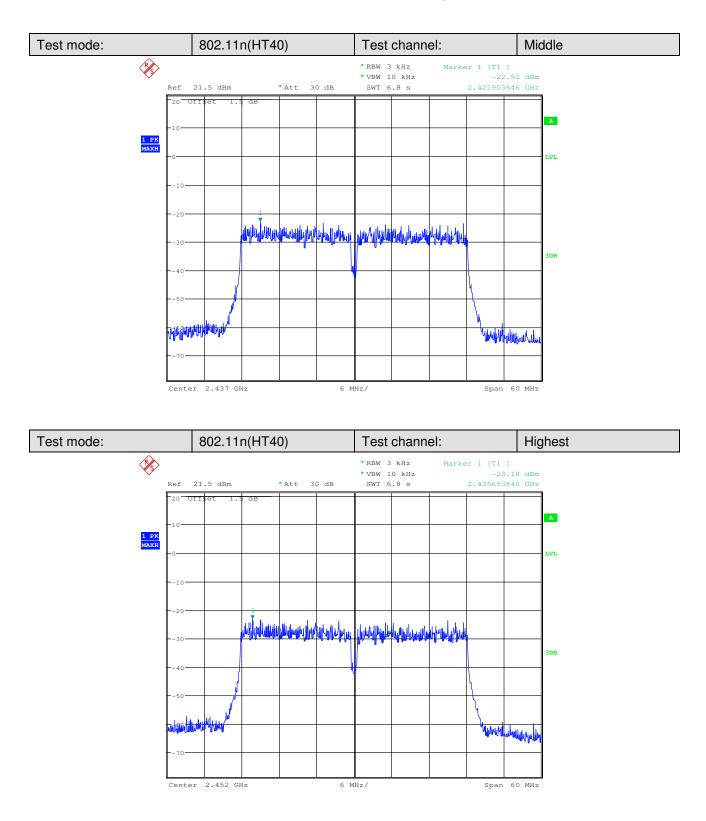



Report No.: SZEM140800475308 Page: 42 of 120


6.6 Band-edge for RF Conducted Emissions

| r · · · · · · · · · · · · · · · · · · · | | | | |
|--|--|--|--|--|
| 47 CFR Part 15C Section 15.247 (d) | | | | |
| KDB558074 D01 v03r02 | | | | |
| Spectrum Analyzer Image: Description of the spectrum analyzer. | | | | |
| Transmitting mode | | | | |
| Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; | | | | |
| 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40). | | | | |
| In any 100 kHz bandwidth outside the frequency band in which the spread | | | | |
| spectrum intentional radiator is operating, the radio frequency power that is | | | | |
| produced by the intentional radiator shall be at least 20 dB below that in the | | | | |
| 100 kHz bandwidth within the band that contains the highest level of the | | | | |
| desired power, based on either an RF conducted or a radiated | | | | |
| measurement. | | | | |
| Refer to section 5.10 for details | | | | |
| Pass | | | | |
| | | | | |






Report No.: SZEM140800475308 Page: 43 of 120

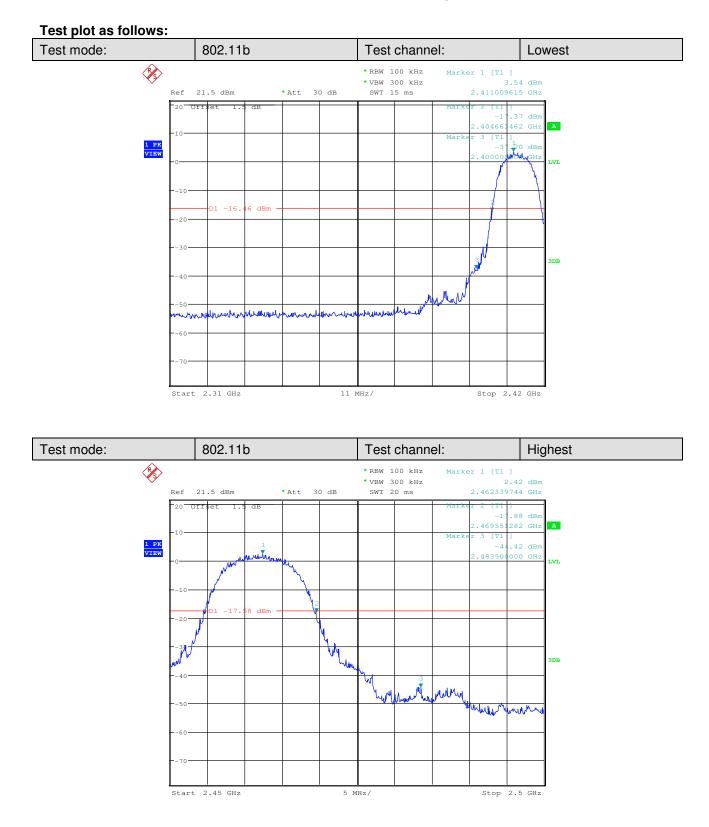




Report No.: SZEM140800475308 Page: 44 of 120

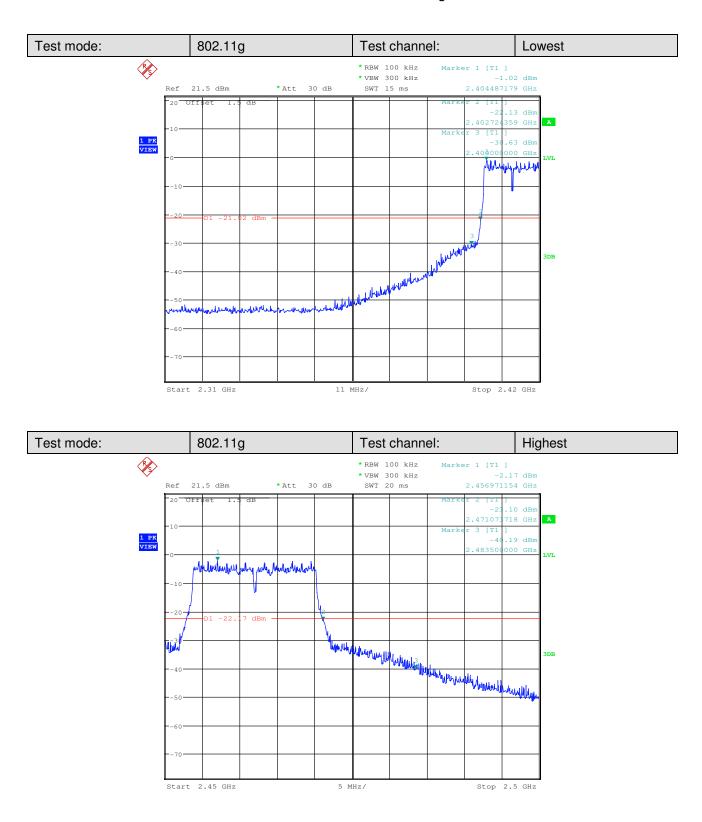




Report No.: SZEM140800475308 Page: 45 of 120

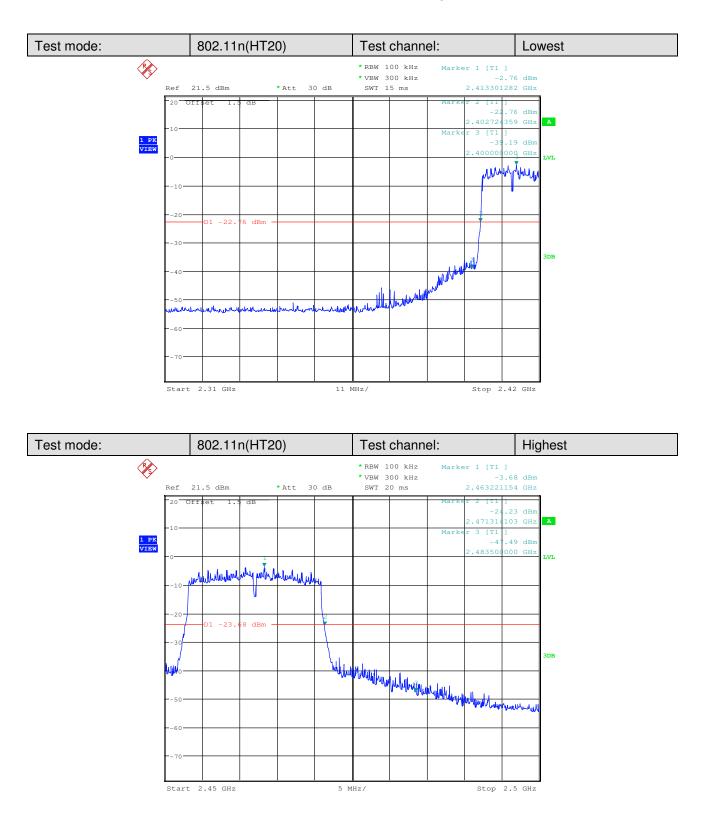



Report No.: SZEM140800475308 Page: 46 of 120

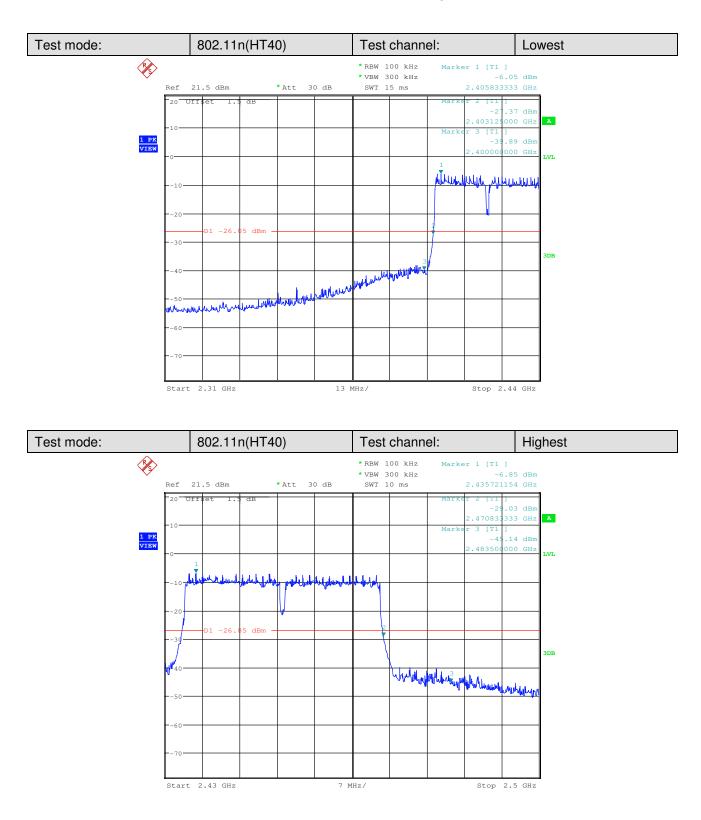



Report No.: SZEM140800475308 Page: 47 of 120


6.7 RF Conducted Spurious Emissions

| Test Requirement: | 47 CFR Part 15C Section 15.247 (d) | | | | | |
|------------------------|---|--|--|--|--|--|
| Test Method: | KDB558074 D01 v03r02 | | | | | |
| Test Setup: | Spectrum Analyzer F.U.T Non-Conducted Table Ground Reference Plane Remark: | | | | | |
| Exploratory Test Mode: | Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. Transmitting mode | | | | | |
| Final Test Mode: | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40) | | | | | |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. | | | | | |
| Instruments Used: | Refer to section 5.10 for details | | | | | |
| Test Results: | Pass | | | | | |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 48 of 120

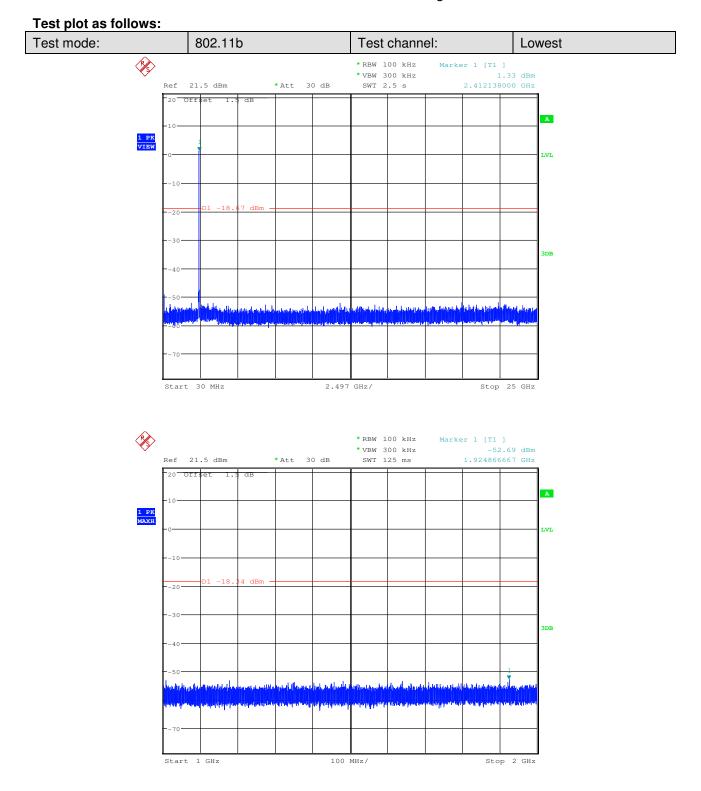




Report No.: SZEM140800475308 Page: 49 of 120 × * RBW 100 kHz Marker 1 [T1] * VBW 300 kHz 1.66 dBm Ref 21.5 dBm * Att 30 dB SWT 125 ms 2.412000000 GHz Offset 20 dF A 1 PK VIEW LVL 3DF 100 MHz/ Stop 3 GHz Start 2 GHz × * RBW 100 kHz Marker 1 [T1] * VBW 300 kHz 21.5 dBm * Att 30 dB SWT 125 ms 4.403133333 GHz Ref 20 Offset dB -A 1 PK MAXH LVL 100 MHz/ Stop 5 GHz Start 4 GHz



Report No.: SZEM140800475308 Page: 50 of 120

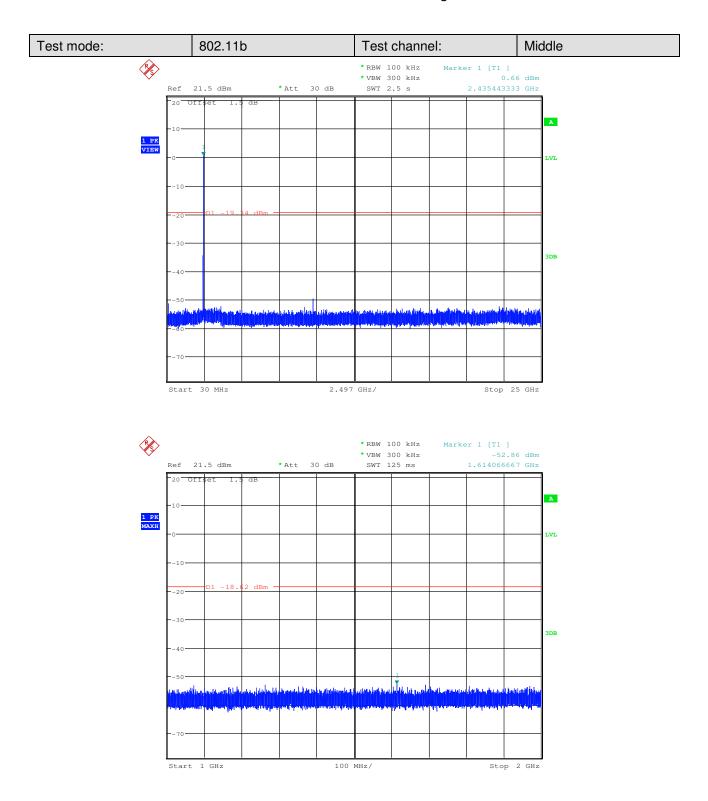



×

1 PK VIEW

×

1 PK MAXH

Start

4 GHz

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140800475308 Page: 51 of 120 * RBW 100 kHz Marker 1 [T1] * VBW 300 kHz 1.38 dBm Ref 21.5 dBm * Att 30 dB SWT 125 ms 2.434866667 GHz Offset 20 dF A LVL 3DF 100 MHz/ Stop 3 GHz Start 2 GHz * RBW 100 kHz Marker 1 [T1] -52.03 dBm 4.873933333 GHz * VBW 300 kHz 21.5 dBm * A++ 30 dB Ref SWT 125 ms Off 20 dE A LVL 3DB

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


100 MHz/

Stop

5 GHz



Report No.: SZEM140800475308 Page: 52 of 120

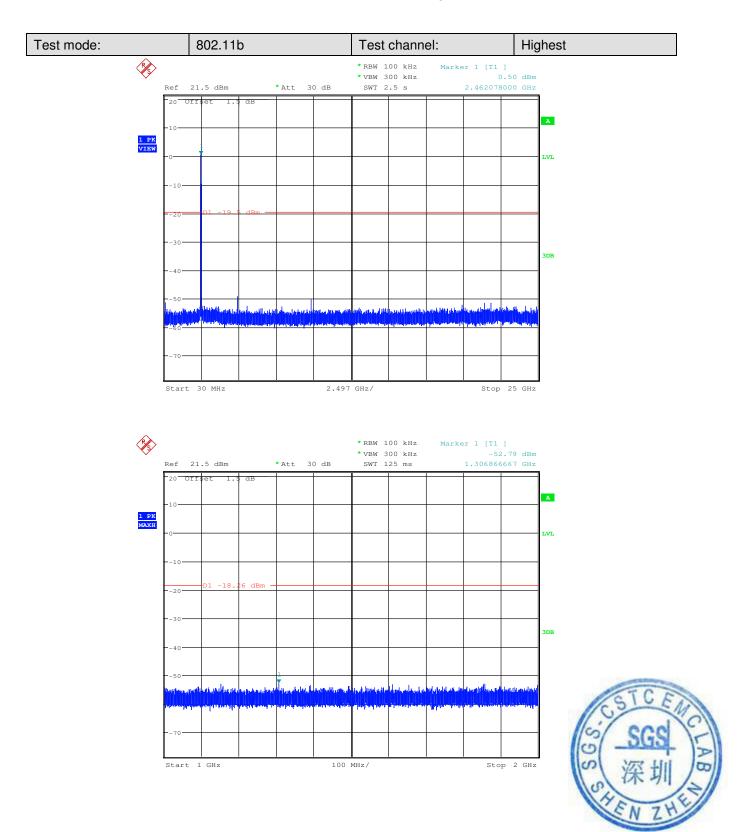




Report No.: SZEM140800475308 Page: 53 of 120 × * RBW 100 kHz Marker 1 [T1] * VBW 300 kHz 1.74 dBm Ref 21.5 dBm * Att 30 dB SWT 125 ms 2.462166667 GHz Offset 20 dF A 1 PK VIEW LVL 3DF 100 MHz/ Stop 3 GHz Start 2 GHz × * RBW 100 kHz Marker 1 [T1] * VBW 300 kHz -50.57 dBm 21.5 dBm * A++ 30 dB 4.924000000 GHz Ref SWT 125 ms Off 20 dE A 1 PK MAXH LVL 3DB Start 4 GHz 100 MHz/ Stop 5 GHz



Report No.: SZEM140800475308 Page: 54 of 120

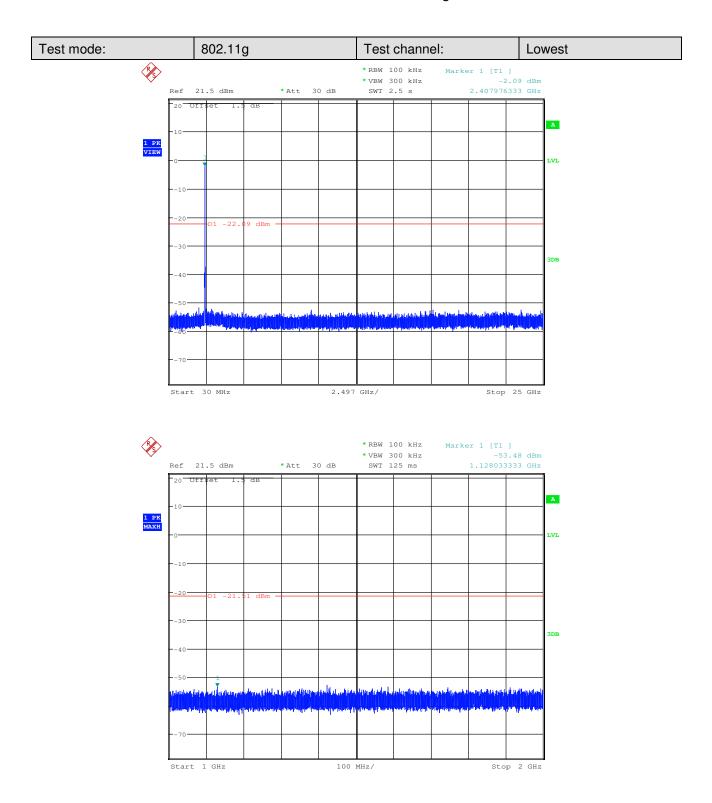




Report No.: SZEM140800475308 Page: 55 of 120 × * RBW 100 kHz Marker 1 [T1] *VBW 300 kHz -1.51 dBm Ref 21.5 dBm * Att 30 dB SWT 125 ms 2.416966667 GHz Offset 20 dF A 1 PK VIEW LVL 3DF 100 MHz/ Stop 3 GHz Start 2 GHz × * RBW 100 kHz Marker 1 [T1] -53.54 dBm * VBW 300 kHz 21.5 dBm * Att 30 dB SWT 125 ms 4.272300000 GHz Ref 20 Offset dB -A 1 PK MAXH LVL 100 MHz/ Stop 5 GHz Start 4 GHz



Report No.: SZEM140800475308 Page: 56 of 120

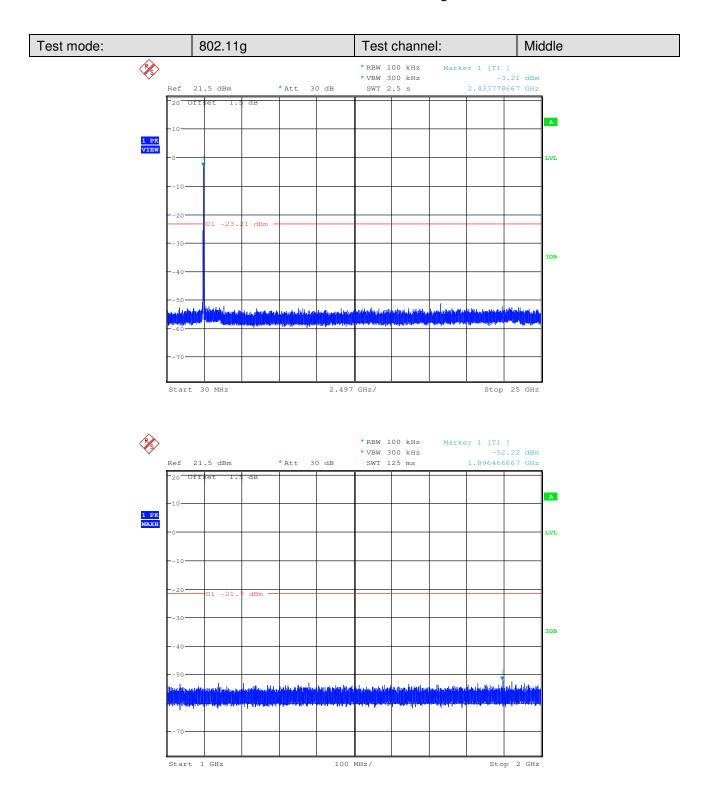





Report No.: SZEM140800475308 Page: 57 of 120 × * RBW 100 kHz Marker 1 [T1] *VBW 300 kHz -1.70 dBm Ref 21.5 dBm * Att 30 dB SWT 125 ms 2.431966667 GHz Offset 20 dF A 1 PK VIEW LVL 3DF 100 MHz/ Stop 3 GHz Start 2 GHz × * RBW 100 kHz Marker 1 [T1] * VBW 300 kHz 21.5 dBm * Att 30 dB SWT 125 ms 4.924366667 GHz Ref 20 Offset dB -A 1 PK MAXH LVL 100 MHz/ Stop 5 GHz Start 4 GHz



Report No.: SZEM140800475308 Page: 58 of 120

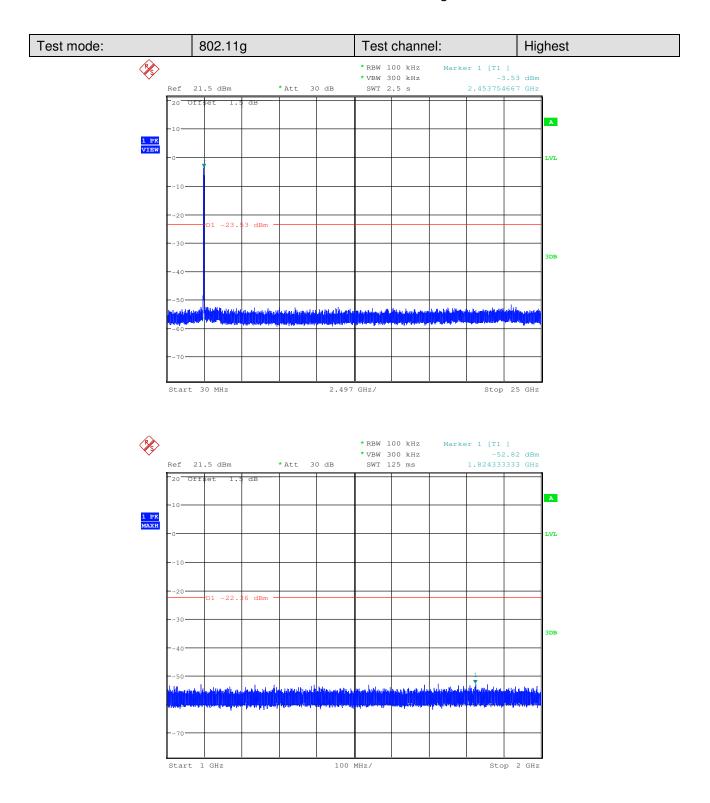




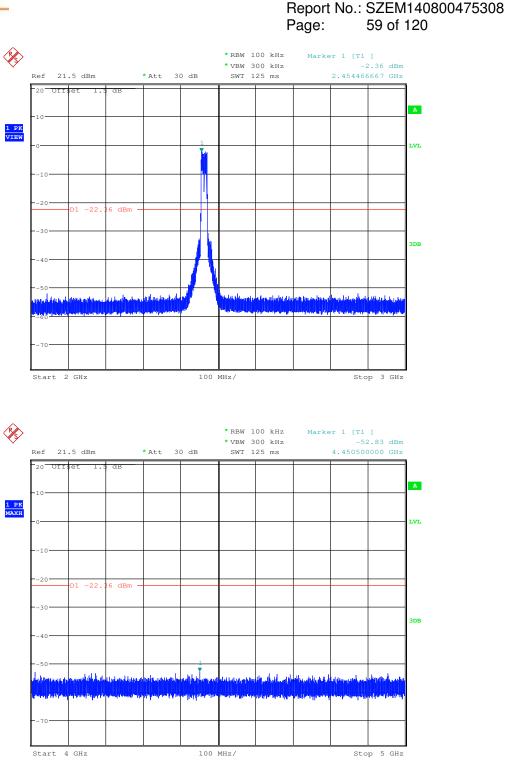




Report No.: SZEM140800475308 Page: 60 of 120

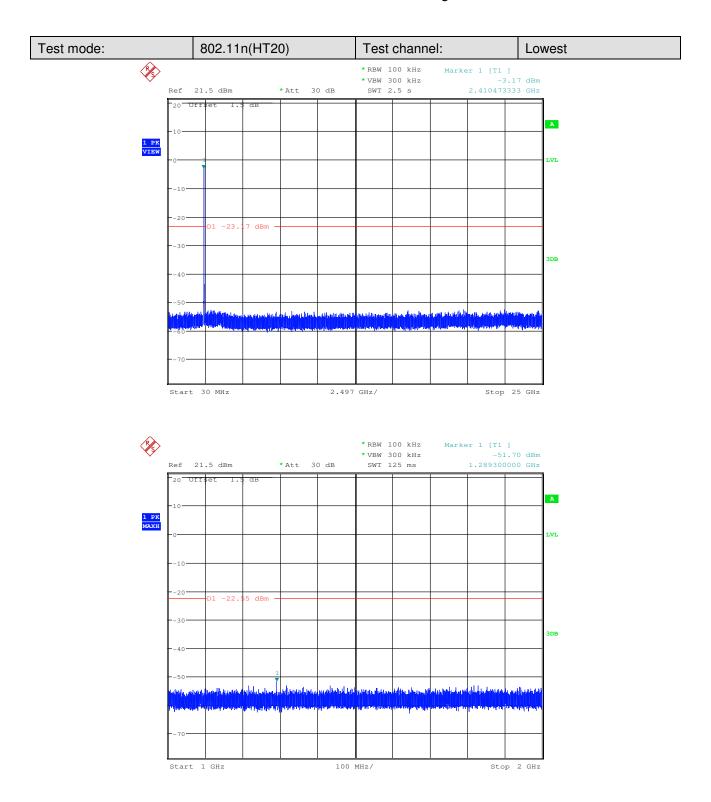




Report No.: SZEM140800475308 Page: 61 of 120

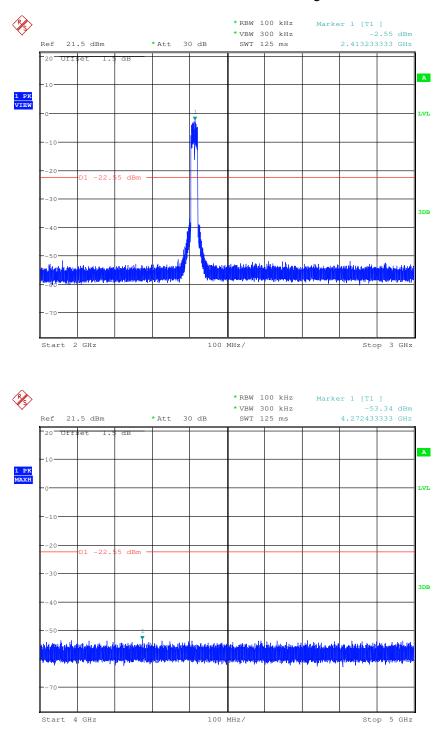



Report No.: SZEM140800475308 Page: 62 of 120

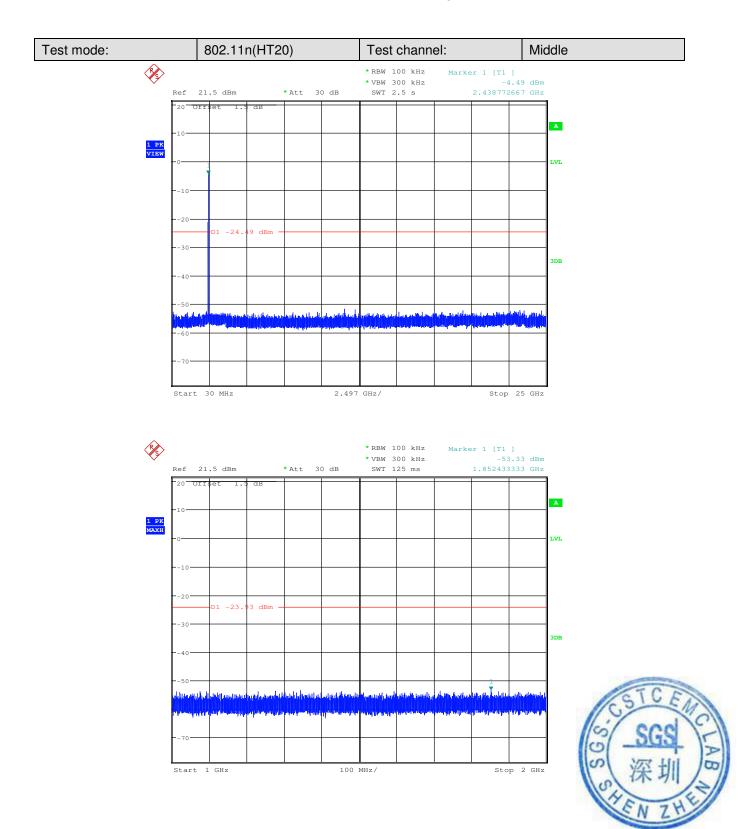


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 63 of 120 × * RBW 100 kHz Marker 1 [T1] *VBW 300 kHz -3.93 dBm Ref 21.5 dBm * Att 30 dB SWT 125 ms 2.438266667 GHz Offset 20 dF A 1 PK VIEW LVL 1 -23 3 dBm 3DF 11 100 MHz/ Stop 3 GHz Start 2 GHz × * RBW 100 kHz Marker 1 [T1] * VBW 300 kHz -53.30 dBm 21.5 dBm * A++ 30 dB 4.754600000 GHz Ref SWT 125 ms Off 20 dE A 1 PK MAXH LVL 01 -23 3 dBm 3DB Start 4 GHz 100 MHz/ Stop 5 GHz



Report No.: SZEM140800475308 Page: 64 of 120

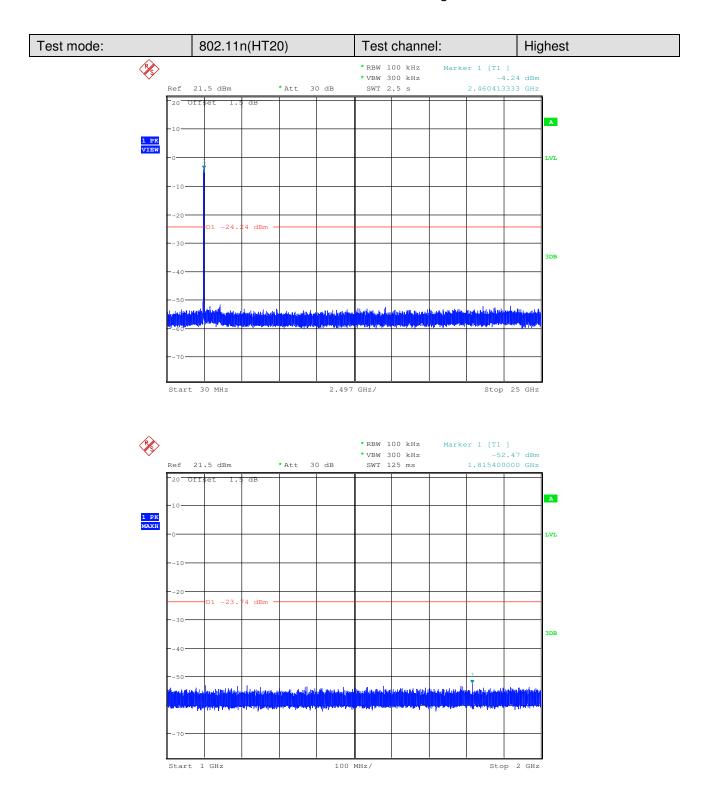




Report No.: SZEM140800475308 Page: 65 of 120 × * RBW 100 kHz Marker 1 [T1] *VBW 300 kHz -3.74 dBm Ref 21.5 dBm * Att 30 dB SWT 125 ms 2.463233333 GHz Offset 20 dF A 1 PK VIEW LVL 4 dBm 3DF 100 MHz/ Stop 3 GHz Start 2 GHz × * RBW 100 kHz Marker 1 [T1] * VBW 300 kHz -52.76 dBm 21.5 dBm * A++ 30 dB 4.157600000 GHz Ref SWT 125 ms OFF 20 dE A 1 PK MAXH LVL 01 -23 4 dBm 3DB Start 4 GHz 100 MHz/ Stop 5 GHz




Report No.: SZEM140800475308 Page: 66 of 120

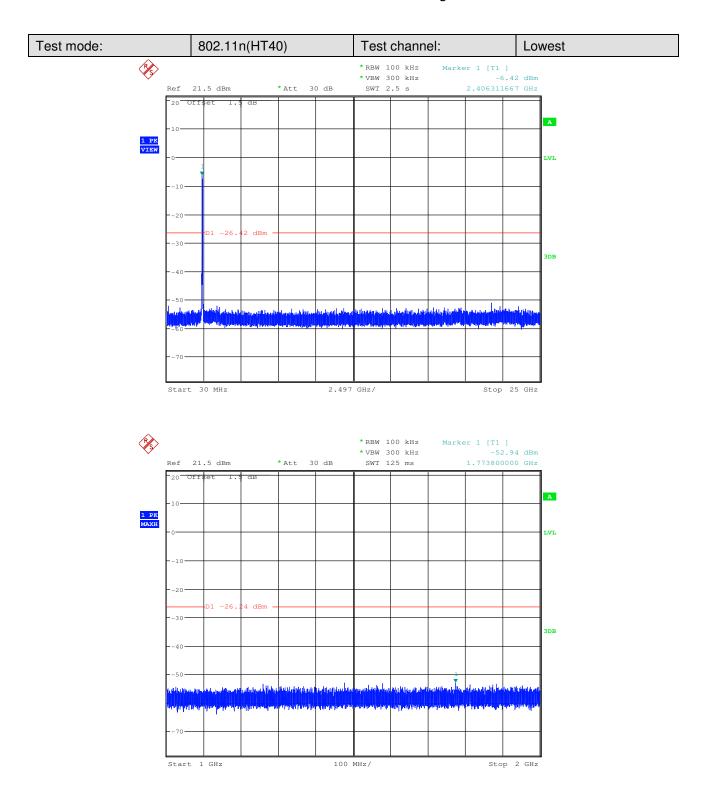




Report No.: SZEM140800475308 Page: 67 of 120

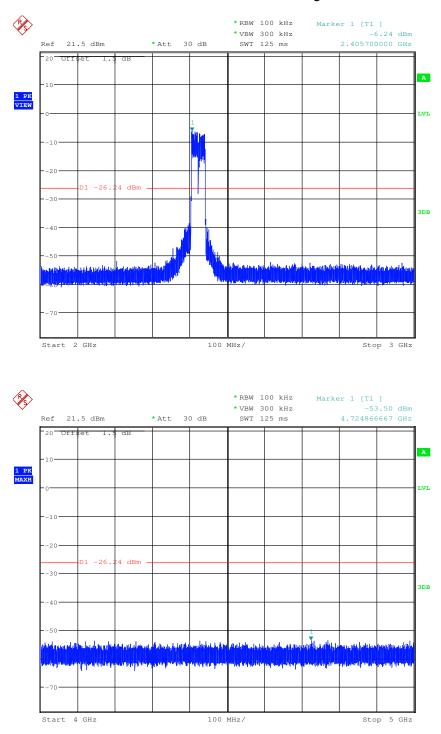



Report No.: SZEM140800475308 Page: 68 of 120

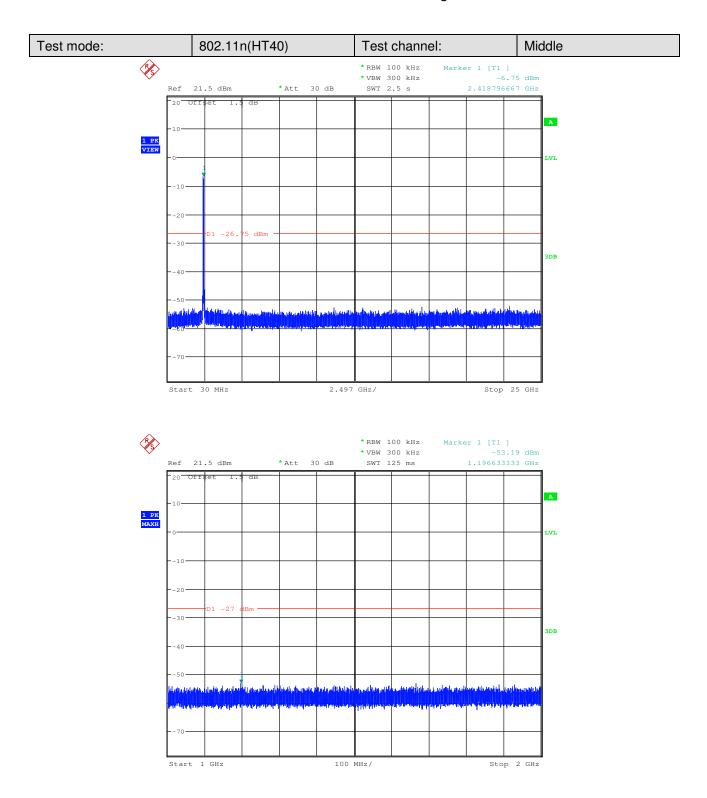




Report No.: SZEM140800475308 Page: 69 of 120 × *RBW 100 kHz Marker 1 [T1] * VBW 300 kHz -7.00 dBm Ref 21.5 dBm * Att 30 dB SWT 125 ms 2.419500000 GHz Offset dE A 1 PK VIEW LVL 30 3DB 100 MHz/ Stop 3 GHz Start 2 GHz × * RBW 100 kHz Marker 1 [T1] -53.55 dBm * VBW 300 kHz 21.5 dBm * Att 30 dB SWT 125 ms 4.849800000 GHz Ref 20 Offset 1 dB А 1 PK MAXH LVL 30 3DB 100 MHz/ Stop 5 GHz Start 4 GHz




Report No.: SZEM140800475308 Page: 70 of 120

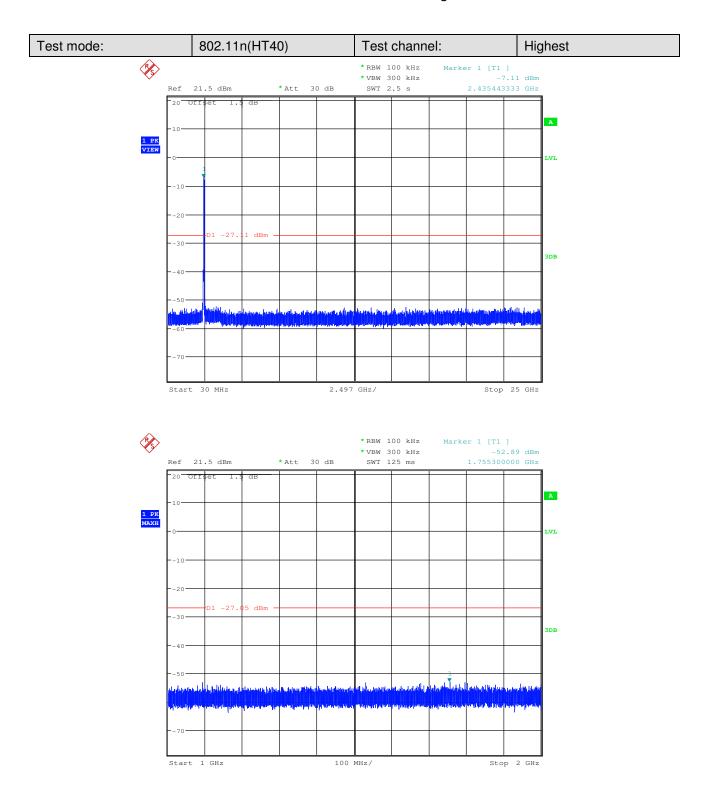



Report No.: SZEM140800475308 Page: 71 of 120

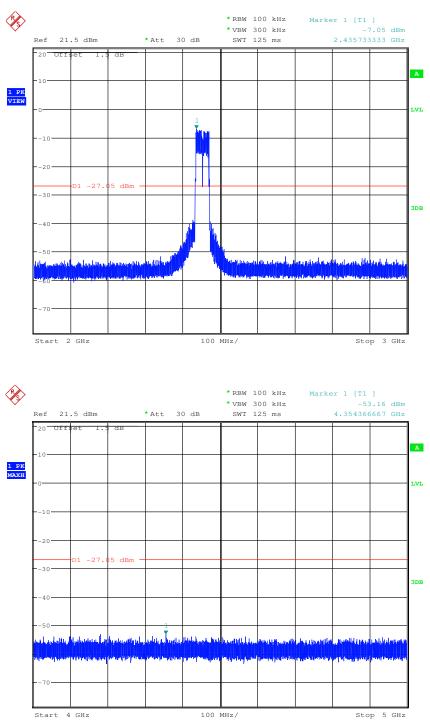

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM140800475308 Page: 72 of 120


6.8 Radiated Spurious Emissions

| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205 | | | | | | |
|--|--|-------------------------------------|-------------------|------------|-----------------------------|--|--|
| Test Method: | ANSI C63.10 2009 | | | | | | |
| Test Site: | Measurement Distance: 3m (Semi-Anechoic Chamber) | | | | | | |
| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark | | |
| | 0.009MHz-0.090MHz | Peak | 10kHz | 30kHz | Peak | | |
| | 0.009MHz-0.090MHz | Average | 10kHz | 30kHz | Average | | |
| | 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak | | |
| | 0.110MHz-0.490MHz | Peak | 10kHz | 30kHz | Peak | | |
| | 0.110MHz-0.490MHz | Average | 10kHz | 30kHz | Average | | |
| | 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak | | |
| | 30MHz-1GHz | Quasi-peak | 100 kHz | 300kHz | Quasi-peak | | |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak | | |
| | Above IGH2 | Peak | 1MHz | 10Hz | Average | | |
| Limit: | Frequency | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark | Measurement distance (m) | | |
| | 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 | | |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 | | |
| | 1.705MHz-30MHz | 30 | - | - | 30 | | |
| | 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 | | |
| | 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 | | |
| | 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 | | |
| | 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 | | |
| | Above 1GHz | 500 | 54.0 | Average | 3 | | |
| Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission lim applicable to the equipment under test. This peak limit applies to the tota emission level radiated by the device. | | | | | | | |





Report No.: SZEM140800475308 Page: 73 of 120

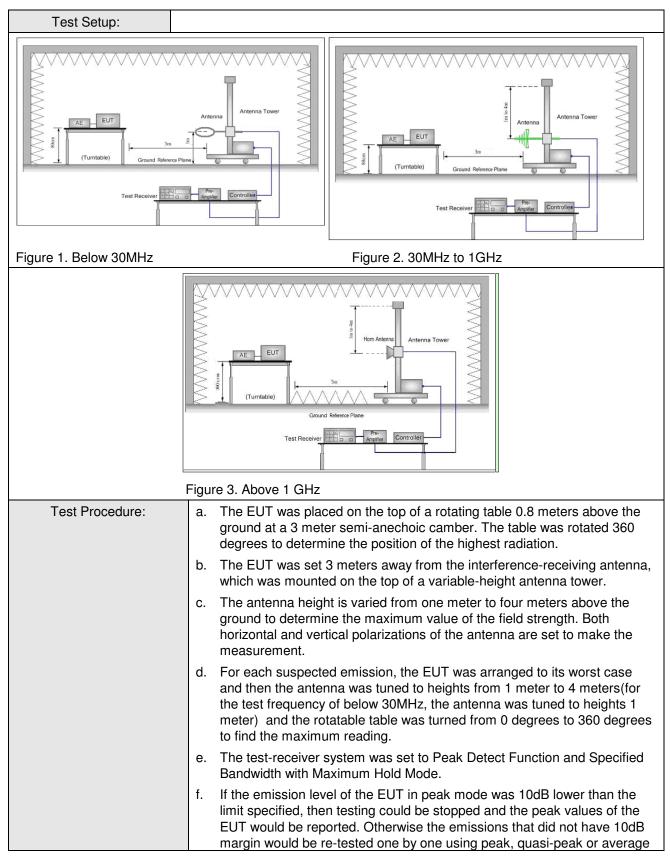



Report No.: SZEM140800475308 Page: 74 of 120

| d then reported in a data sheet. | | | | |
|--|--|--|--|--|
| est channel ,the middle channel ,the Highest | | | | |
| nents are performed in X, Y, Z axis positioning for found the X axis positioning which it is worse | | | | |
| es until all frequencies measured was complete. | | | | |
| : Transmitting mode, Charge +Transmitting mode | | | | |
| tting mode and Charge +Transmitting mode, found node which it is worse case | | | | |
| 1Mbps of rate is the worst case of 802.11b; 6Mbps | | | | |
| 302.11g; 6.5Mbps of rate is the worst case of | | | | |
| of rate is the worst case of 802.11n(HT40) | | | | |
| ded in the report. | | | | |
| tails | | | | |
| | | | | |
| of rate is the worst case of 802.11n(HT40) rded in the report. | | | | |


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140800475308 Page: 75 of 120

6.8.1 Radiated emission below 1GHz

| 30MHz~1GHz (QP) | | |
|-----------------|---------------------|----------|
| Test mode: | Charge+Transmitting | Vertical |

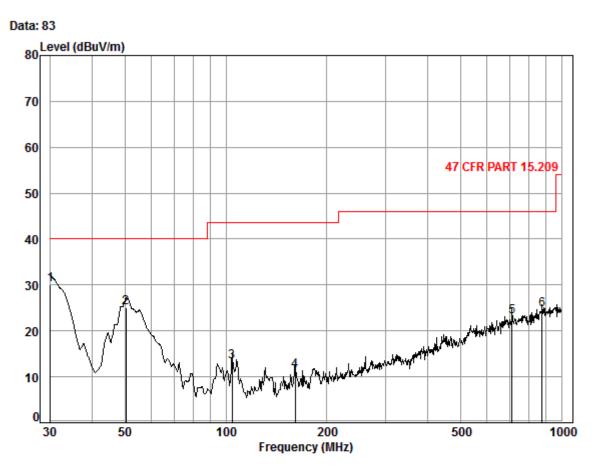

Condition: 47 CFR PART 15.209 3m 3142C Vertical Job No. : 4753RF


Test mode: Charge+TX mode

| | | | | Preamp | | | | 0ver |
|---|--------|------|--------|--------|-------|--------|--------|--------|
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 30.00 | 0.60 | 18.70 | 27.36 | 38.19 | 30.13 | 40.00 | -9.87 |
| 2 | 50.41 | 0.80 | 8.64 | 27.29 | 42.99 | 25.14 | 40.00 | -14.86 |
| 3 | 104.54 | 1.21 | 8.87 | 27.17 | 30.36 | 13.27 | 43.50 | -30.23 |
| 4 | 160.91 | 1.34 | 9.59 | 26.86 | 27.32 | 11.39 | 43.50 | -32.11 |
| 5 | 711.67 | 2.94 | 21.60 | 27.40 | 25.96 | 23.10 | 46.00 | -22.90 |
| 6 | 875.25 | 3.51 | 23.00 | 26.89 | 25.03 | 24.65 | 46.00 | -21.35 |



Report No.: SZEM140800475308 Page: 76 of 120



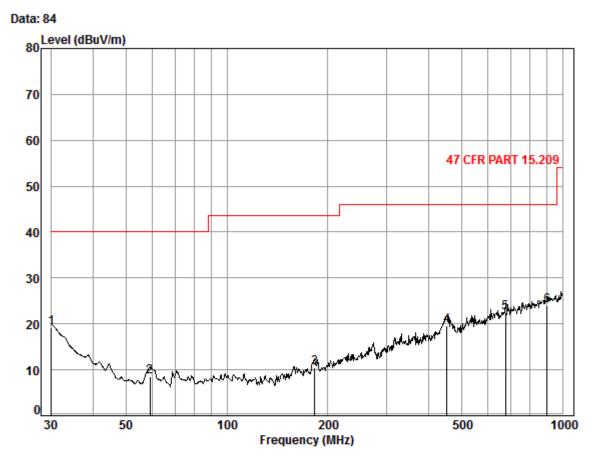

| Condition: | 47 CFR PART | 15.209 3m | 3142C Horizontal |
|------------|-------------|-----------|------------------|
| Job No. : | 4753RF | | |

Test mode: Charge+TX mode

| | | Cable | Ant | Preamp | Read | | Limit | 0ver |
|---|--------|-------|--------|--------|-------|--------|--------|--------|
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| | · | | | | | | | |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| | | | | | | | | |
| 1 | 30.00 | 0.60 | 18.70 | 27.36 | 27.15 | 19.09 | 40.00 | -20.91 |
| 2 | 59.03 | 0.80 | 7.33 | 27.27 | 27.73 | 8.59 | 40.00 | -31.41 |
| 3 | 182.56 | 1.37 | 9.95 | 26.77 | 25.89 | 10.44 | 43.50 | -33.06 |
| 4 | 452.72 | 2.42 | 17.00 | 27.46 | 27.71 | 19.67 | 46.00 | -26.33 |
| 5 | 675.21 | 2.85 | 21.40 | 27.44 | 25.72 | 22.53 | 46.00 | -23.47 |
| 6 | 900.15 | 3.60 | 23.20 | 26.78 | 23.88 | 23.90 | 46.00 | -22.10 |
| | | | | | | | | |



Report No.: SZEM140800475308 Page: 77 of 120

| Test mode: | 802 | .11b | Test ch | annel: | Lowest | Remark | : | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1589.289 | 2.68 | 29.13 | 38.38 | 46.39 | 39.82 | 74 | 34.18 | Vertical |
| 3634.910 | 4.14 | 33.03 | 38.80 | 44.93 | 43.30 | 74 | 30.70 | Vertical |
| 4824.000 | 4.31 | 34.72 | 39.24 | 43.79 | 43.58 | 74 | 30.42 | Vertical |
| 7236.000 | 5.28 | 35.60 | 39.06 | 42.98 | 44.80 | 74 | 29.20 | Vertical |
| 9648.000 | 6.51 | 37.45 | 37.91 | 41.31 | 47.36 | 74 | 26.64 | Vertical |
| 11994.380 | 7.21 | 38.69 | 38.70 | 43.24 | 50.44 | 74 | 23.56 | Vertical |
| 1706.700 | 2.79 | 29.69 | 38.40 | 46.39 | 40.47 | 74 | 33.53 | Horizontal |
| 3367.661 | 3.75 | 32.70 | 38.68 | 46.60 | 44.37 | 74 | 29.63 | Horizontal |
| 4824.000 | 4.31 | 34.72 | 39.24 | 46.82 | 46.61 | 74 | 27.39 | Horizontal |
| 7236.000 | 5.28 | 35.60 | 39.06 | 44.18 | 46.00 | 74 | 28.00 | Horizontal |
| 9648.000 | 6.51 | 37.45 | 37.91 | 40.88 | 46.93 | 74 | 27.07 | Horizontal |
| 12178.980 | 6.92 | 38.93 | 38.85 | 43.69 | 50.69 | 74 | 23.31 | Horizontal |

6.8.2 Transmitter emission above 1GHz

| Test mode: | 802 | .11b | Test ch | annel: | Middle | Remark | : | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1655.354 | 2.74 | 29.46 | 38.39 | 49.37 | 43.18 | 74 | -30.82 | Vertical |
| 3690.853 | 4.08 | 33.07 | 38.82 | 45.53 | 43.86 | 74 | -30.14 | Vertical |
| 4874.000 | 4.36 | 34.77 | 39.26 | 46.10 | 45.97 | 74 | -28.03 | Vertical |
| 7311.000 | 5.22 | 35.52 | 39.06 | 44.73 | 46.41 | 74 | -27.59 | Vertical |
| 9748.000 | 6.49 | 37.76 | 37.85 | 41.73 | 48.13 | 74 | -25.87 | Vertical |
| 11457.210 | 7.74 | 38.19 | 38.45 | 43.99 | 51.47 | 74 | -22.53 | Vertical |
| 1706.700 | 2.79 | 29.69 | 38.40 | 45.19 | 39.27 | 74 | -34.73 | Horizontal |
| 3561.636 | 4.09 | 32.96 | 38.77 | 45.16 | 43.44 | 74 | -30.56 | Horizontal |
| 4874.000 | 4.36 | 34.77 | 39.26 | 43.86 | 43.73 | 74 | -30.27 | Horizontal |
| 7311.000 | 5.22 | 35.52 | 39.06 | 43.67 | 45.35 | 74 | -28.65 | Horizontal |
| 9748.000 | 6.49 | 37.76 | 37.85 | 40.79 | 47.19 | 74 | -26.81 | Horizontal |
| 11692.920 | 7.39 | 38.39 | 38.56 | 42.18 | 49.40 | 74 | -24.60 | Horizontal |



Report No.: SZEM140800475308 Page: 78 of 120

| Test mode: | 802 | .11b | Test ch | annel: | Highest | Remark | | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1655.354 | 2.74 | 29.46 | 38.39 | 49.37 | 43.18 | 74 | -30.82 | Vertical |
| 3672.110 | 4.10 | 33.06 | 38.82 | 45.88 | 44.22 | 74 | -29.78 | Vertical |
| 4944.000 | 4.42 | 34.84 | 39.28 | 44.68 | 44.66 | 74 | -29.34 | Vertical |
| 7416.000 | 5.14 | 35.42 | 39.05 | 45.17 | 46.68 | 74 | -27.32 | Vertical |
| 9888.000 | 6.74 | 38.18 | 37.77 | 41.12 | 48.27 | 74 | -25.73 | Vertical |
| 11428.080 | 7.80 | 38.17 | 38.43 | 43.01 | 50.55 | 74 | -23.45 | Vertical |
| 1655.354 | 2.74 | 29.46 | 38.39 | 49.37 | 43.18 | 74 | -30.82 | Horizontal |
| 3672.110 | 4.10 | 33.06 | 38.82 | 45.88 | 44.22 | 74 | -29.78 | Horizontal |
| 4944.000 | 4.42 | 34.84 | 39.28 | 45.99 | 45.97 | 74 | -28.03 | Horizontal |
| 7416.000 | 5.14 | 35.42 | 39.05 | 45.17 | 46.68 | 74 | -27.32 | Horizontal |
| 9888.000 | 6.74 | 38.18 | 37.77 | 40.95 | 48.10 | 74 | -25.90 | Horizontal |
| 11283.550 | 7.60 | 38.13 | 38.36 | 42.84 | 50.21 | 74 | -23.79 | Horizontal |

| Test mode: | 802 | .11g | Test ch | annel: | Lowest | Remark | | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1655.354 | 2.74 | 29.46 | 38.39 | 52.65 | 46.46 | 74 | -27.54 | Vertical |
| 3709.691 | 4.06 | 33.08 | 38.83 | 45.57 | 43.88 | 74 | -30.12 | Vertical |
| 4824.000 | 4.31 | 34.72 | 39.24 | 47.41 | 47.20 | 74 | -26.80 | Vertical |
| 7236.000 | 5.28 | 35.60 | 39.06 | 43.36 | 45.18 | 74 | -28.82 | Vertical |
| 9648.000 | 6.51 | 37.45 | 37.91 | 42.42 | 48.47 | 74 | -25.53 | Vertical |
| 11933.470 | 7.25 | 38.63 | 38.67 | 42.69 | 49.90 | 74 | -24.10 | Vertical |
| 1663.803 | 2.75 | 29.50 | 38.39 | 50.58 | 44.44 | 74 | -29.56 | Horizontal |
| 3598.087 | 4.17 | 33.00 | 38.78 | 45.65 | 44.04 | 74 | -29.96 | Horizontal |
| 4824.000 | 4.31 | 34.72 | 39.24 | 45.00 | 44.79 | 74 | -29.21 | Horizontal |
| 7236.000 | 5.28 | 35.60 | 39.06 | 44.21 | 46.03 | 74 | -27.97 | Horizontal |
| 9648.000 | 6.51 | 37.45 | 37.91 | 44.00 | 50.05 | 74 | -23.95 | Horizontal |
| 12241.140 | 6.82 | 39.00 | 38.91 | 44.00 | 50.91 | 74 | -23.09 | Horizontal |



Report No.: SZEM140800475308 Page: 79 of 120

| Test mode: | 802 | .11g | Test ch | annel: | Middle | Remark | : | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1541.476 | 2.66 | 28.84 | 38.38 | 48.74 | 41.86 | 74 | 32.14 | Vertical |
| 3709.691 | 4.06 | 33.08 | 38.83 | 45.47 | 43.78 | 74 | 30.22 | Vertical |
| 4874.000 | 4.36 | 34.77 | 39.26 | 50.22 | 50.09 | 74 | 23.91 | Vertical |
| 7311.000 | 5.22 | 35.52 | 39.06 | 44.65 | 46.33 | 74 | 27.67 | Vertical |
| 9748.000 | 6.49 | 37.76 | 37.85 | 41.40 | 47.80 | 74 | 26.20 | Vertical |
| 11283.550 | 7.60 | 38.13 | 38.36 | 43.92 | 51.29 | 74 | 22.71 | Vertical |
| 1655.354 | 2.74 | 29.46 | 38.39 | 52.77 | 46.58 | 74 | 27.42 | Horizontal |
| 3579.815 | 4.13 | 32.98 | 38.78 | 44.68 | 43.01 | 74 | 30.99 | Horizontal |
| 4874.000 | 4.36 | 34.77 | 39.26 | 44.83 | 44.70 | 74 | 29.30 | Horizontal |
| 7311.000 | 5.22 | 35.52 | 39.06 | 43.22 | 44.90 | 74 | 29.10 | Horizontal |
| 9748.000 | 6.49 | 37.76 | 37.85 | 42.77 | 49.17 | 74 | 24.83 | Horizontal |
| 12117.140 | 7.02 | 38.85 | 38.80 | 42.91 | 49.98 | 74 | 24.02 | Horizontal |

| Test mode: | 802 | .11g | Test ch | annel: | Highest | Remark | : | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1663.803 | 2.75 | 29.50 | 38.39 | 54.46 | 48.32 | 74 | -25.68 | Vertical |
| 3489.840 | 3.93 | 32.88 | 38.74 | 45.56 | 43.63 | 74 | -30.37 | Vertical |
| 4944.000 | 4.42 | 34.84 | 39.28 | 47.56 | 47.54 | 74 | -26.46 | Vertical |
| 7416.000 | 5.14 | 35.42 | 39.05 | 45.16 | 46.67 | 74 | -27.33 | Vertical |
| 9888.000 | 6.74 | 38.18 | 37.77 | 41.71 | 48.86 | 74 | -25.14 | Vertical |
| 12556.750 | 6.82 | 39.24 | 39.17 | 44.29 | 51.18 | 74 | -22.82 | Vertical |
| 1655.354 | 2.74 | 29.46 | 38.39 | 53.00 | 46.81 | 74 | -27.19 | Horizontal |
| 3709.691 | 4.06 | 33.08 | 38.83 | 45.51 | 43.82 | 74 | -30.18 | Horizontal |
| 4944.000 | 4.42 | 34.84 | 39.28 | 47.56 | 47.54 | 74 | -26.46 | Horizontal |
| 7416.000 | 5.14 | 35.42 | 39.05 | 44.26 | 45.77 | 74 | -28.23 | Horizontal |
| 9888.000 | 6.74 | 38.18 | 37.77 | 41.33 | 48.48 | 74 | -25.52 | Horizontal |
| 11283.550 | 7.60 | 38.13 | 38.36 | 43.03 | 50.40 | 74 | -23.60 | Horizontal |



Report No.: SZEM140800475308 Page: 80 of 120

| Test mode: | 80 | 2.11n(HT20) | Test ch | annel: | Lowest | Remark | : | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1663.803 | 2.75 | 29.50 | 38.39 | 50.58 | 44.44 | 74 | -29.56 | Vertical |
| 3454.486 | 3.85 | 32.84 | 38.72 | 46.27 | 44.24 | 74 | -29.76 | Vertical |
| 4824.000 | 4.31 | 34.72 | 39.24 | 44.40 | 44.19 | 74 | -29.81 | Vertical |
| 7236.000 | 5.28 | 35.60 | 39.06 | 43.87 | 45.69 | 74 | -28.31 | Vertical |
| 9648.000 | 6.51 | 37.45 | 37.91 | 41.83 | 47.88 | 74 | -26.12 | Vertical |
| 11692.920 | 7.39 | 38.39 | 38.56 | 43.51 | 50.73 | 74 | -23.27 | Vertical |
| 1663.803 | 2.75 | 29.50 | 38.39 | 47.78 | 41.64 | 74 | -32.36 | Horizontal |
| 3893.520 | 4.12 | 33.32 | 38.91 | 44.70 | 43.23 | 74 | -30.77 | Horizontal |
| 4824.000 | 4.31 | 34.72 | 39.24 | 44.40 | 44.19 | 74 | -29.81 | Horizontal |
| 7236.000 | 5.28 | 35.60 | 39.06 | 43.15 | 44.97 | 74 | -29.03 | Horizontal |
| 9648.000 | 6.51 | 37.45 | 37.91 | 40.34 | 46.39 | 74 | -27.61 | Horizontal |
| 12055.600 | 7.12 | 38.77 | 38.75 | 42.10 | 49.24 | 74 | -24.76 | Horizontal |



Report No.: SZEM140800475308 Page: 81 of 120

| Test mode: | 802 | .11n(HT20) | Test ch | annel: | Middle | Remark | : | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1698.033 | 2.78 | 29.65 | 38.40 | 45.45 | 39.48 | 74 | -34.52 | Vertical |
| 3690.853 | 4.08 | 33.07 | 38.82 | 45.18 | 43.51 | 74 | -30.49 | Vertical |
| 4874.000 | 4.36 | 34.77 | 39.26 | 49.44 | 49.31 | 74 | -24.69 | Vertical |
| 7311.000 | 5.22 | 35.52 | 39.06 | 42.94 | 44.62 | 74 | -29.38 | Vertical |
| 9748.000 | 6.49 | 37.76 | 37.85 | 40.05 | 46.45 | 74 | -27.55 | Vertical |
| 11056.090 | 7.32 | 38.11 | 38.25 | 42.13 | 49.31 | 74 | -24.69 | Vertical |
| 1655.354 | 2.74 | 29.46 | 38.39 | 51.46 | 45.27 | 74 | -28.73 | Horizontal |
| 3709.691 | 4.06 | 33.08 | 38.83 | 46.39 | 44.70 | 74 | -29.30 | Horizontal |
| 4874.000 | 4.36 | 34.77 | 39.26 | 44.79 | 44.66 | 74 | -29.34 | Horizontal |
| 7311.000 | 5.22 | 35.52 | 39.06 | 45.13 | 46.81 | 74 | -27.19 | Horizontal |
| 9748.000 | 6.49 | 37.76 | 37.85 | 42.55 | 48.95 | 74 | -25.05 | Horizontal |
| 11872.880 | 7.29 | 38.57 | 38.64 | 44.15 | 51.37 | 74 | -22.63 | Horizontal |

| Test mode: | 8 | 02.11n(HT20) | Test ch | annel: | Highest | Remark | : | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1663.803 | 2.75 | 29.50 | 38.39 | 51.51 | 45.37 | 74 | -28.63 | Vertical |
| 3672.110 | 4.10 | 33.06 | 38.82 | 46.58 | 44.92 | 74 | -29.08 | Vertical |
| 4944.000 | 4.42 | 34.84 | 39.28 | 46.58 | 46.56 | 74 | -27.44 | Vertical |
| 7416.000 | 5.14 | 35.42 | 39.05 | 47.28 | 48.79 | 74 | -25.21 | Vertical |
| 9888.000 | 6.74 | 38.18 | 37.77 | 41.71 | 48.86 | 74 | -25.14 | Vertical |
| 12117.140 | 7.02 | 38.85 | 38.80 | 44.44 | 51.51 | 74 | -22.49 | Vertical |
| 1655.354 | 2.74 | 29.46 | 38.39 | 49.37 | 43.18 | 74 | -30.82 | Horizontal |
| 3672.110 | 4.10 | 33.06 | 38.82 | 46.58 | 44.92 | 74 | -29.08 | Horizontal |
| 4944.000 | 4.42 | 34.84 | 39.28 | 46.58 | 46.56 | 74 | -27.44 | Horizontal |
| 7416.000 | 5.14 | 35.42 | 39.05 | 45.17 | 46.68 | 74 | -27.32 | Horizontal |
| 9888.000 | 6.74 | 38.18 | 37.77 | 41.71 | 48.86 | 74 | -25.14 | Horizontal |
| 12117.140 | 7.02 | 38.85 | 38.80 | 44.44 | 51.51 | 74 | -22.49 | Horizontal |



Report No.: SZEM140800475308 Page: 82 of 120

| Test mode: | 80 | 2.11n(HT40) | Test ch | annel: | Lowest | Remark | : Peak | |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1329.894 | 2.55 | 27.77 | 38.35 | 49.25 | 41.22 | 74 | -32.78 | Vertical |
| 3747.656 | 4.03 | 33.11 | 38.85 | 45.51 | 43.80 | 74 | -30.20 | Vertical |
| 4844.000 | 4.33 | 34.74 | 39.25 | 44.88 | 44.70 | 74 | -29.30 | Vertical |
| 7266.000 | 5.25 | 35.57 | 39.06 | 43.41 | 45.17 | 74 | -28.83 | Vertical |
| 9688.000 | 6.50 | 37.57 | 37.88 | 43.64 | 49.83 | 74 | -24.17 | Vertical |
| 12117.140 | 7.02 | 38.85 | 38.80 | 43.51 | 50.58 | 74 | -23.42 | Vertical |
| 1655.354 | 2.74 | 29.46 | 38.39 | 54.26 | 48.07 | 74 | -25.93 | Horizontal |
| 3598.087 | 4.17 | 33.00 | 38.78 | 45.05 | 43.44 | 74 | -30.56 | Horizontal |
| 4844.000 | 4.33 | 34.74 | 39.25 | 50.92 | 50.74 | 74 | -23.26 | Horizontal |
| 7266.000 | 5.25 | 35.57 | 39.06 | 43.40 | 45.16 | 74 | -28.84 | Horizontal |
| 9688.000 | 6.50 | 37.57 | 37.88 | 40.33 | 46.52 | 74 | -27.48 | Horizontal |
| 11283.550 | 7.60 | 38.13 | 38.36 | 43.37 | 50.74 | 74 | -23.26 | Horizontal |





Report No.: SZEM140800475308 Page: 83 of 120

| Test mode: | 802 | 2.11n(HT40) | Test ch | annel: | Middle | Remark | : | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1655.354 | 2.74 | 29.46 | 38.39 | 53.68 | 47.49 | 74 | -26.51 | Vertical |
| 3728.625 | 4.05 | 33.10 | 38.84 | 45.24 | 43.55 | 74 | -30.45 | Vertical |
| 4874.000 | 4.36 | 34.77 | 39.26 | 47.99 | 47.86 | 74 | -26.14 | Vertical |
| 7311.000 | 5.22 | 35.52 | 39.06 | 44.43 | 46.11 | 74 | -27.89 | Vertical |
| 9748.000 | 6.49 | 37.76 | 37.85 | 41.30 | 47.70 | 74 | -26.30 | Vertical |
| 11994.380 | 7.21 | 38.69 | 38.70 | 43.54 | 50.74 | 74 | -23.26 | Vertical |
| 1655.354 | 2.74 | 29.46 | 38.39 | 49.99 | 43.80 | 74 | -30.20 | Horizontal |
| 3728.625 | 4.05 | 33.10 | 38.84 | 45.24 | 43.55 | 74 | -30.45 | Horizontal |
| 4874.000 | 4.36 | 34.77 | 39.26 | 47.99 | 47.86 | 74 | -26.14 | Horizontal |
| 7311.000 | 5.22 | 35.52 | 39.06 | 44.43 | 46.11 | 74 | -27.89 | Horizontal |
| 9748.000 | 6.49 | 37.76 | 37.85 | 41.07 | 47.47 | 74 | -26.53 | Horizontal |
| 12055.600 | 7.12 | 38.77 | 38.75 | 43.38 | 50.52 | 74 | -23.48 | Horizontal |

| Test mode: | 80 | 2.11n(HT40) | Test ch | annel: | Highest | Remark | : | Peak |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 1663.803 | 2.75 | 29.50 | 38.39 | 45.65 | 39.51 | 74 | -34.49 | Vertical |
| 3598.087 | 4.17 | 33.00 | 38.78 | 43.96 | 42.35 | 74 | -31.65 | Vertical |
| 4924.000 | 4.40 | 34.82 | 39.28 | 43.43 | 43.37 | 74 | -30.63 | Vertical |
| 7386.000 | 5.15 | 35.44 | 39.05 | 43.57 | 45.11 | 74 | -28.89 | Vertical |
| 9848.000 | 6.62 | 38.06 | 37.79 | 41.00 | 47.89 | 74 | -26.11 | Vertical |
| 11812.580 | 7.32 | 38.51 | 38.61 | 42.07 | 49.29 | 74 | -24.71 | Vertical |
| 1663.803 | 2.75 | 29.50 | 38.39 | 53.12 | 46.98 | 74 | -27.02 | Horizontal |
| 3709.691 | 4.06 | 33.08 | 38.83 | 45.55 | 43.86 | 74 | -30.14 | Horizontal |
| 4924.000 | 4.40 | 34.82 | 39.28 | 49.09 | 49.03 | 74 | -24.97 | Horizontal |
| 7386.000 | 5.15 | 35.44 | 39.05 | 44.98 | 46.52 | 74 | -27.48 | Horizontal |
| 9848.000 | 6.62 | 38.06 | 37.79 | 40.49 | 47.38 | 74 | -26.62 | Horizontal |
| 12024.960 | 7.17 | 38.73 | 38.72 | 43.22 | 50.40 | 74 | -23.60 | Horizontal |



Report No.: SZEM140800475308 Page: 84 of 120

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140800475308 Page: 85 of 120

6.9 Restricted bands around fundamental frequency

| Test Requirement: | 47 CFR Part 15C Section 1 | 5.209 and 15.205 | | | | | | | | |
|-------------------|---------------------------|--|------------------|--|--|--|--|--|--|--|
| Test Method: | ANSI C63.10 2009 | ANSI C63.10 2009 | | | | | | | | |
| Test Site: | Measurement Distance: 3n | Measurement Distance: 3m (Semi-Anechoic Chamber) | | | | | | | | |
| Limit: | Frequency | Limit (dBuV/m @3m) | Remark | | | | | | | |
| | 30MHz-88MHz | 40.0 | Quasi-peak Value | | | | | | | |
| | 88MHz-216MHz | 43.5 | Quasi-peak Value | | | | | | | |
| | 216MHz-960MHz | 46.0 | Quasi-peak Value | | | | | | | |
| | 960MHz-1GHz | 54.0 | Quasi-peak Value | | | | | | | |
| | Above 1011 | 54.0 | Average Value | | | | | | | |
| | Above 1GHz | 74.0 | Peak Value | | | | | | | |
| Tact Satura: | | | | | | | | | | |

Test Setup:

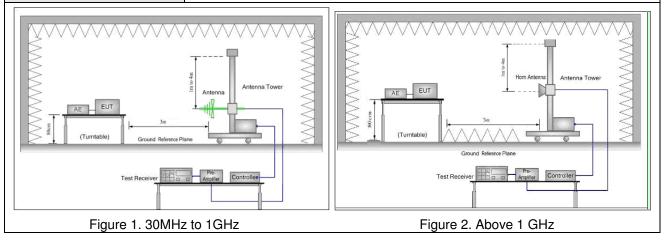



Report No.: SZEM140800475308 Page: 86 of 120

| Test Procedure: | a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. | | | | | |
|------------------------|---|--|--|--|--|--|
| | b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. | | | | | |
| | c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. | | | | | |
| | d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. | | | | | |
| | e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. | | | | | |
| | f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel | | | | | |
| | g. Test the EUT in the lowest channel, the Highest channel | | | | | |
| | The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. | | | | | |
| | Repeat above procedures until all frequencies measured was complete. | | | | | |
| Exploratory Test Mode: | Transmitting mode, Charge + Transmitting mode | | | | | |
| Final Test Mode: | Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case | | | | | |
| | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40) | | | | | |
| | Only the worst case is recorded in the report. | | | | | |
| Instruments Used: | Refer to section 5.10 for details | | | | | |
| Test Results: | Pass | | | | | |




Report No.: SZEM140800475308 87 of 120 Page:

Test plot as follows:

Test mode: 802.11h

| Worse case mode: | | Test channel: | Lowest | Remark: | Peak | Vertical |
|------------------|--|---------------|--------|---------|------|----------|

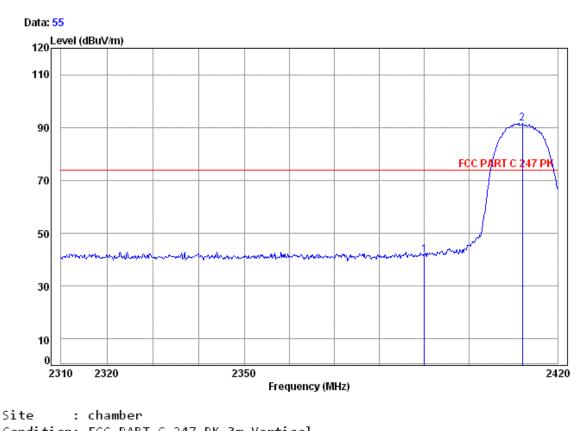


| Condit | ion: FCC | PART | C 247 I | PK 3m V | ertica | 1 | | |
|--------|----------|--------|---------|---------|--------|--------|--------|--------|
| Job No | : : 4753 | RF | | | | | | |
| Mode: | : 2412 | 2 B Ba | nd edg | e | | | | |
| | | Cable | Ant | Preamp | Read | | Limit | 0ver |
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| _ | | | | | | | | |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| | | | | | | | | |
| 1 | 2390.00 | 3.36 | 32.35 | 38.46 | 44.63 | 41.88 | 74.00 | -32.12 |
| 2 pp | 2412.02 | 3.38 | 32.41 | 38.46 | 94.23 | 91.56 | 74.00 | 17.56 |



Report No.: SZEM140800475308 Page: 88 of 120


| Worse case mode: | Test channel: | Lowest | Remark: | Peak | Horizontal |
|------------------|---------------|--------|---------|------|------------|
|------------------|---------------|--------|---------|------|------------|

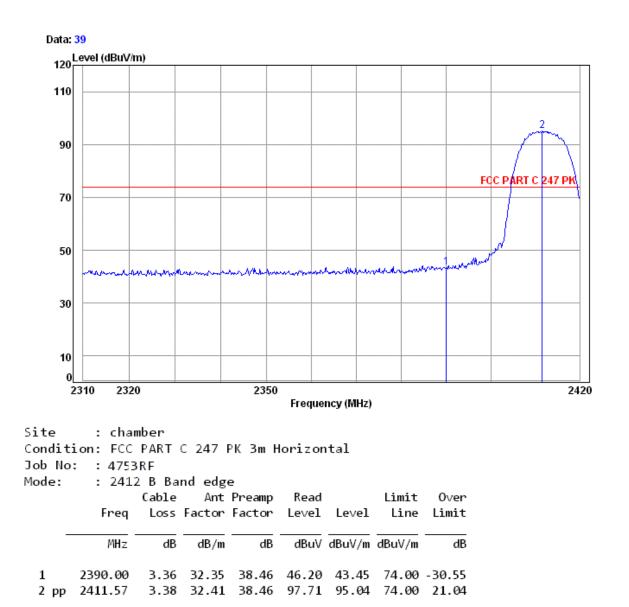



Report No.: SZEM140800475308 Page: 89 of 120


| Worse case mode: Test channel | Lowest | Remark: | Average | Vertical | |
|-------------------------------|--------|---------|---------|----------|--|
|-------------------------------|--------|---------|---------|----------|--|

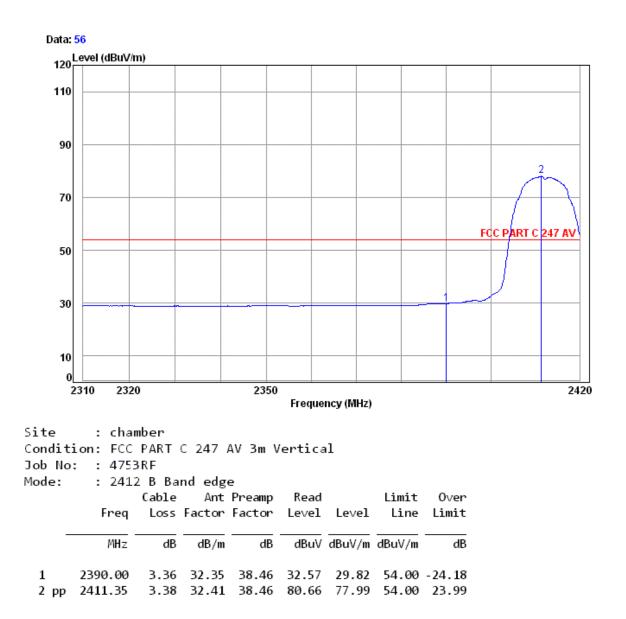



Report No.: SZEM140800475308 Page: 90 of 120


| Worse case mode: | Test channel: | Lowest | Remark: | Average | Horizontal | |
|------------------|---------------|--------|---------|---------|------------|--|
|------------------|---------------|--------|---------|---------|------------|--|

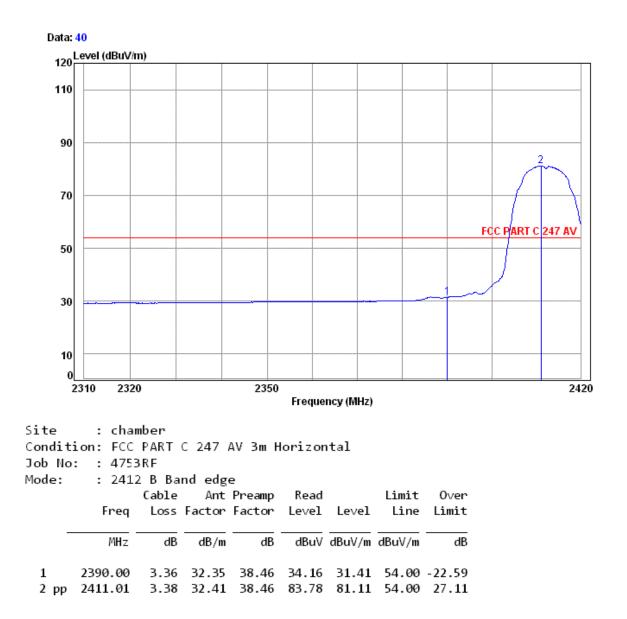



Report No.: SZEM140800475308 Page: 91 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Peak | Vertical |
|------------------|---------------|---------|---------|------|----------|
|------------------|---------------|---------|---------|------|----------|

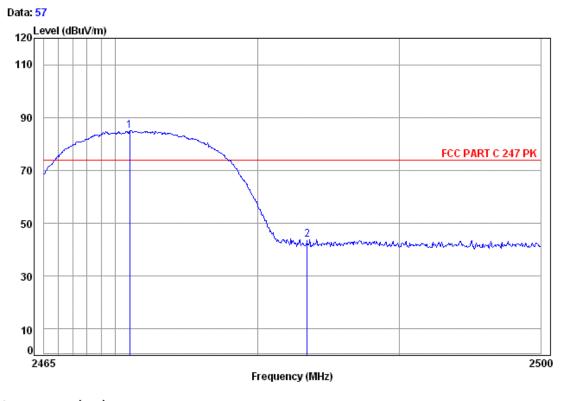


| Site | : char | mber | | | | | | |
|---------|----------|--------|--------|---------|---------|--------|--------|--------|
| Conditi | ion: FCC | PART | C 247 | PK 3m V | /ertica | 1 | | |
| Job No: | : : 4753 | BRF | | | | | | |
| Mode: | : 2472 | 2 B Ba | nd edg | e | | | | |
| | | Cable | Ant | Preamp | Read | | Limit | 0∨er |
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| _ | | | | | | | | |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| | | | | | | | | |
| 1 pp | 2471.02 | 3.45 | 32.44 | 38.46 | 87.73 | 85.16 | 74.00 | 11.16 |
| 2 | 2483.50 | 3.47 | 32.44 | 38.47 | 46.32 | 43.76 | 74.00 | -30.24 |



Report No.: SZEM140800475308 Page: 92 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Peak | Horizontal | |
|------------------|---------------|---------|---------|------|------------|--|
|------------------|---------------|---------|---------|------|------------|--|

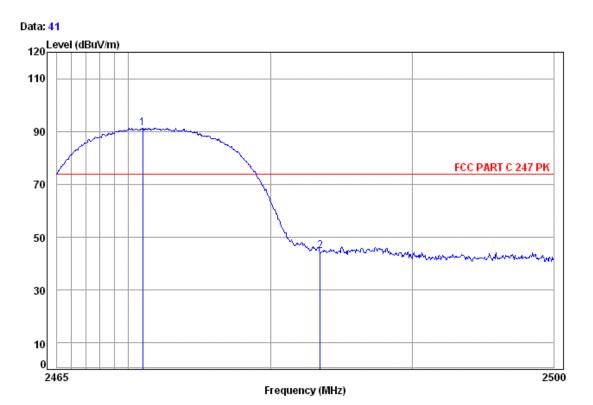


| Site Condit Job No | : char ion: FCC : : 4753 | PART | C 247 | PK 3m H | lorizor | ıtal | | |
|--------------------------|--------------------------------|---------|--------|---------|---------|--------|--------|-----------------|
| Mode: | : 247 | 2 B B a | nd edg | e | | | | |
| | | Cable | Ant | Preamp | Read | | Limit | 0∨er |
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| - | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 pp 2 | 2471.02 2483.50 | | | | | | | 17.35 -29.37 |





Report No.: SZEM140800475308 Page: 93 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Average | Vertical | |
|------------------|---------------|---------|---------|---------|----------|--|
|------------------|---------------|---------|---------|---------|----------|--|

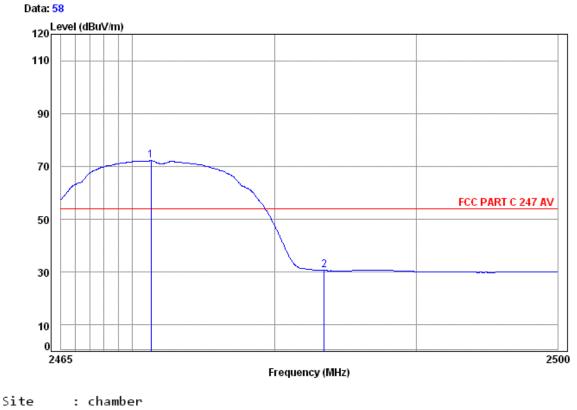


| Conditi | ion: FCC | PART | C 247 | AV 3m V | ertica | 1 | | |
|---------|----------|--------|--------|---------|--------|--------|--------|--------|
| Job No | : : 4753 | BRF | | | | | | |
| Mode: | : 2472 | 2 B Ba | nd edg | e | | | | |
| | | Cable | Ant | Preamp | Read | | Limit | 0∨er |
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| _ | | | | | | | | |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| | | | | | | | | |
| 1 pp | 2471.30 | 3.45 | 32.44 | 38.46 | 74.72 | 72.15 | 54.00 | 18.15 |
| 2 | 2483.50 | 3.47 | 32.44 | 38.47 | 33.19 | 30.63 | 54.00 | -23.37 |



Report No.: SZEM140800475308 Page: 94 of 120

dB

| Worse case mode: | Test channel: | Highest | Remark: | Average | Horizontal |
|------------------|---------------|---------|---------|---------|------------|
|------------------|---------------|---------|---------|---------|------------|

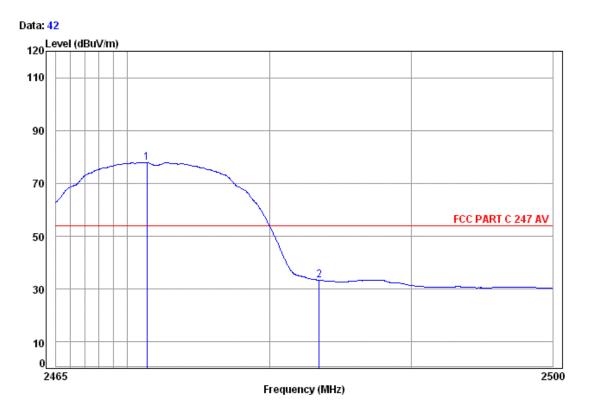

Site : chamber Condition: FCC PART C 247 AV 3m Horizontal Job No: : 4753RF Mode: : 2472 B Band edge Ant Preamp Cable Read Limit 0ver Loss Factor Factor Level Level Line Limit Freq MHz dBuV dBuV/m dBuV/m dB dB/m dB 32.44 38.46 80.42 77.85 54.00 23.85 1 pp 2471.37 3.45 2 2483.50 3.47 32.44 38.47 35.92 33.36 54.00 - 20.64




Test mode: 802 11a

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM140800475308 Page: 95 of 120


| | 5 | | | | | |
|------------------|---|---------------|--------|---------|------|----------|
| Worse case mode: | | Test channel: | Lowest | Remark: | Peak | Vertical |

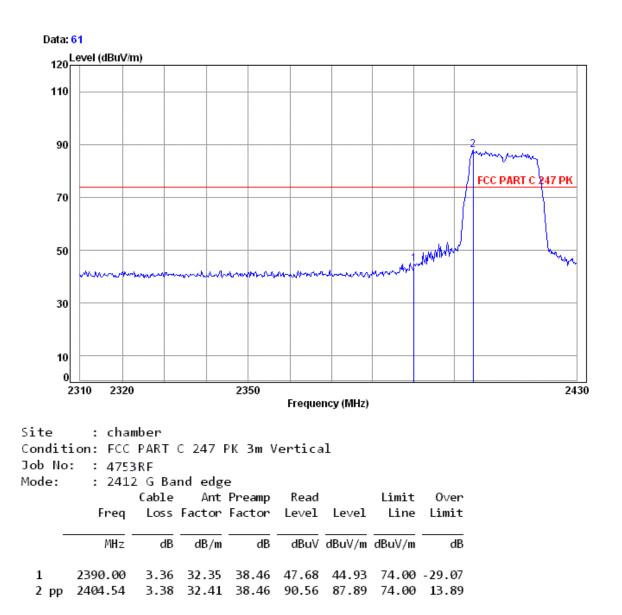




Report No.: SZEM140800475308 Page: 96 of 120

| Worse case mode: Te | Test channel: Lowest | Remark: | Peak | Horizontal |
|---------------------|----------------------|---------|------|------------|
|---------------------|----------------------|---------|------|------------|

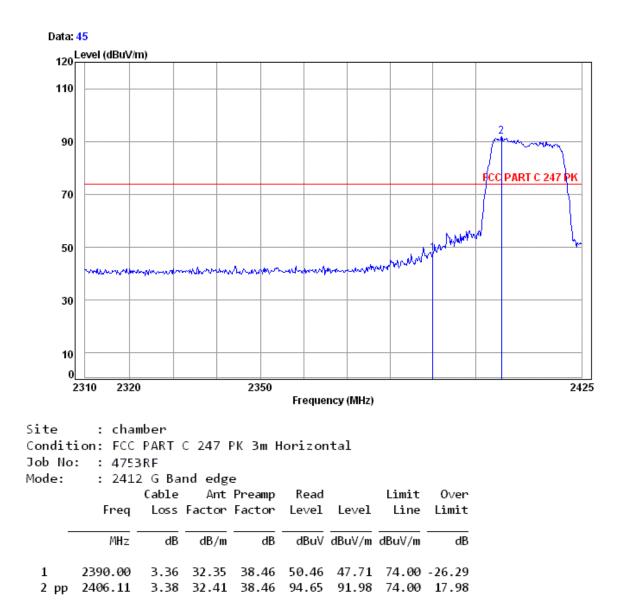




Report No.: SZEM140800475308 Page: 97 of 120

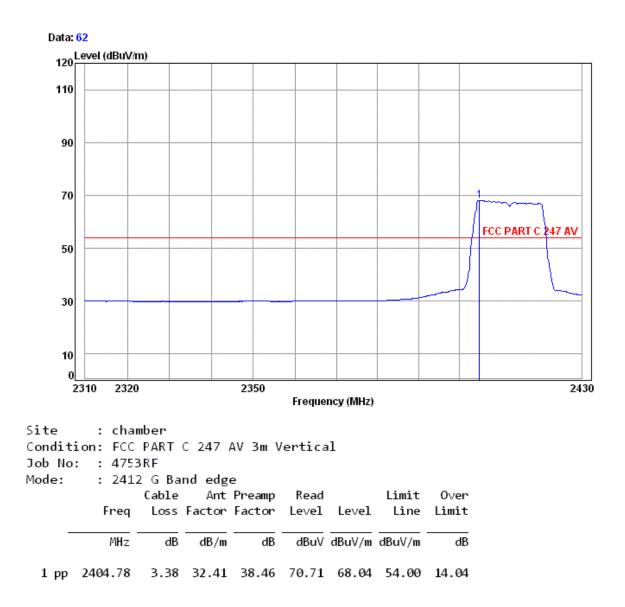



Report No.: SZEM140800475308 Page: 98 of 120


| Worse case mode: | Test channel: | Lowest | Remark: | Average | Horizontal | |
|------------------|---------------|--------|---------|---------|------------|--|
|------------------|---------------|--------|---------|---------|------------|--|

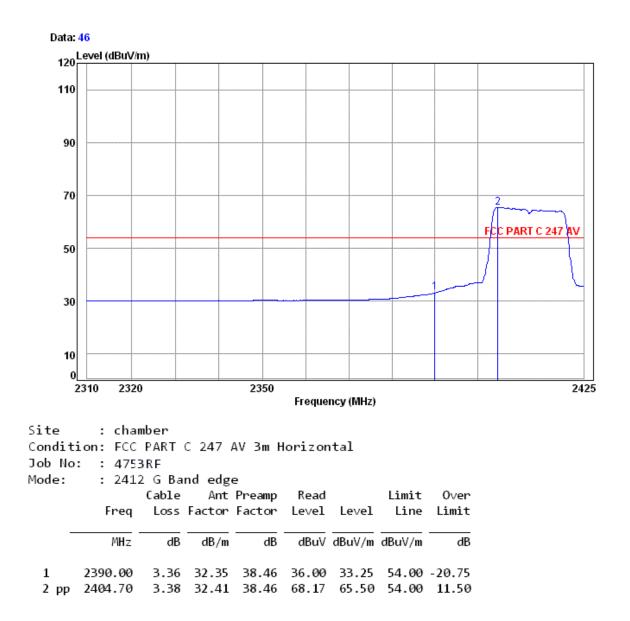



Report No.: SZEM140800475308 Page: 99 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Peak | Vertical |
|------------------|---------------|---------|---------|------|----------|
|------------------|---------------|---------|---------|------|----------|

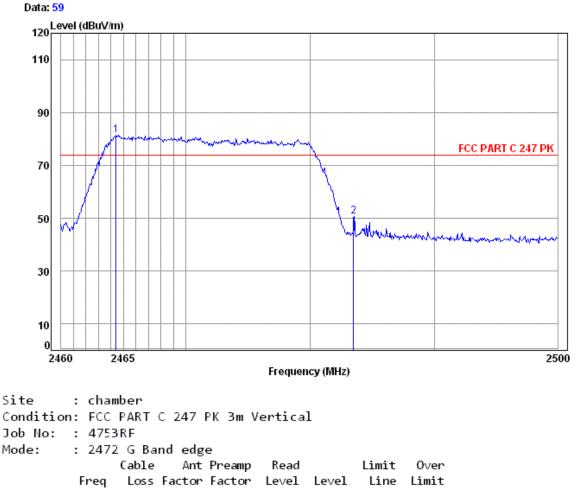


| - | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
|---|--------------------|----|------|----|------|--------|--------|----|
| | 2464.41 2483.50 | | | | | | | |



Report No.: SZEM140800475308 Page: 100 of 120


| Worse case mode: | Test channel: | Highest | Remark: | Peak | Horizontal |
|------------------|---------------|---------|---------|------|------------|
|------------------|---------------|---------|---------|------|------------|

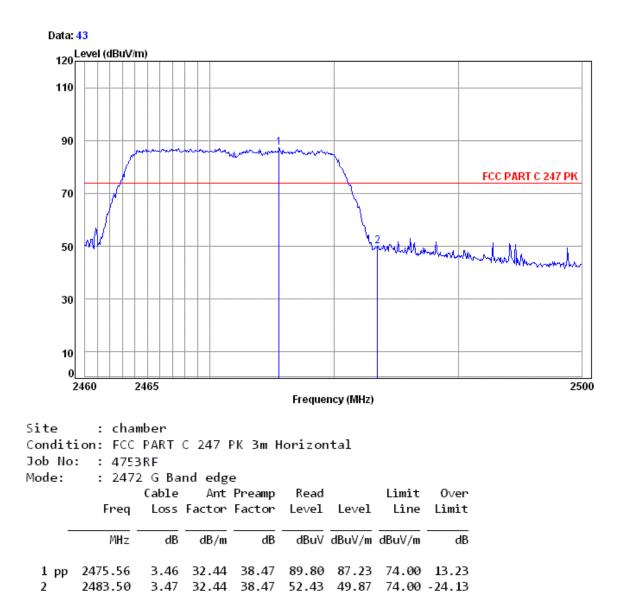



Report No.: SZEM140800475308 Page: 101 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Average | Vertical |
|------------------|---------------|---------|---------|---------|----------|
|------------------|---------------|---------|---------|---------|----------|

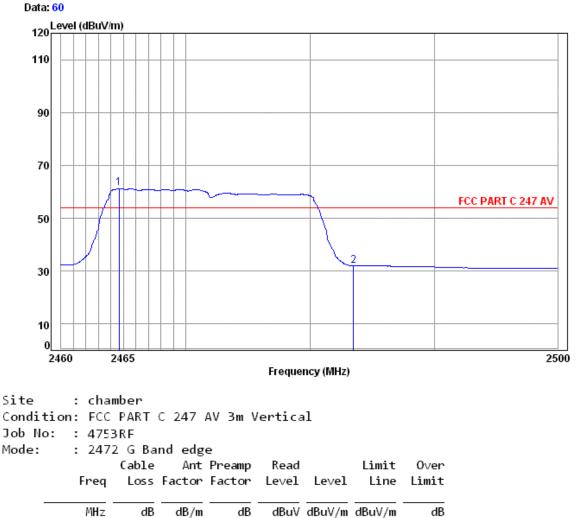


 1 pp
 2464.65
 3.45
 32.43
 38.46
 63.98
 61.40
 54.00
 7.40

 2
 2483.50
 3.47
 32.44
 38.47
 34.71
 32.15
 54.00
 -21.85



Report No.: SZEM140800475308 Page: 102 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Average | Horizontal |
|------------------|---------------|---------|---------|---------|------------|
|------------------|---------------|---------|---------|---------|------------|

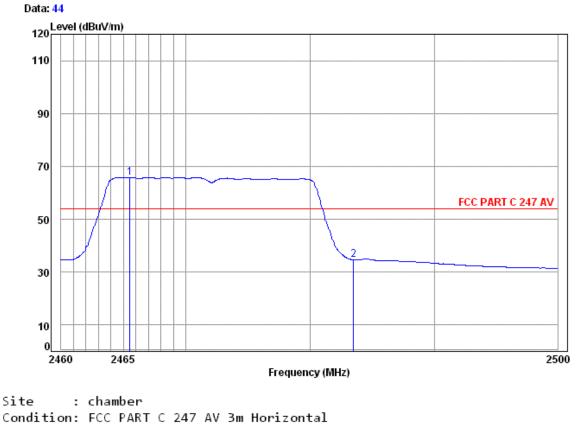

Job No: : 4753RF

| o: : 4/5 | 3KF | | | | | | |
|----------|---------------------------------|--|---|---|---|--|--|
| : 247 | 2 G Ba | nd edg | e | | | | |
| | Cable | Ant | Preamp | Read | | Limit | 0∨er |
| Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| | | | | | | | |
| MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| | | | | | | | |
| 2465.52 | 3.45 | 32.43 | 38.46 | 68.45 | 65.87 | 54.00 | 11.87 |
| 2483 50 | 3 /17 | 32 44 | 38 /17 | 37 21 | 3/1 65 | 5/ 00 | - 19 35 |
| | : 247 Freq MHz 2465.52 | Cable Freq Loss MHz dB 2465.52 3.45 | : 2472 G Band edg Cable Ant Freq Loss Factor MHz dB dB/m 2465.52 3.45 32.43 | : 2472 G Band edge Cable Ant Preamp Freq Loss Factor Factor MHz dB dB/m dB 2465.52 3.45 32.43 38.46 | : 2472 G Band edge Cable Ant Preamp Read Freq Loss Factor Factor Level MHz dB dB/m dB dBuV 2465.52 3.45 32.43 38.46 68.45 | : 2472 G Band edge Cable Ant Preamp Read Freq Loss Factor Factor Level Level MHz dB dB/m dB dBuV dBuV/m 2465.52 3.45 32.43 38.46 68.45 65.87 | : 2472 G Band edge Cable Ant Preamp Read Limit Freq Loss Factor Factor Level Level Line MHz dB dB/m dB dBuV dBuV/m dBuV/m |


SS STC EARC LAB SS SGS AB STEN ZHEN



Report No.: SZEM140800475308 Page: 103 of 120

Test mode: 802.11n(HT20)


| Worse case mode: | Test channel: | Lowest | Remark: | Peak | Vertical | 1 |
|------------------|---------------|--------|---------|------|----------|---|
|------------------|---------------|--------|---------|------|----------|---|

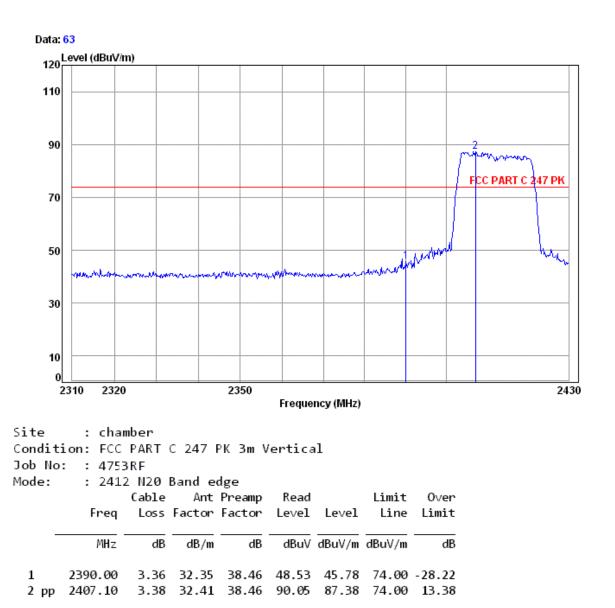



Report No.: SZEM140800475308 Page: 104 of 120


| Worse case mode: | Test channel: | Lowest | Remark: | Peak | Horizontal |
|------------------|---------------|--------|---------|------|------------|
|------------------|---------------|--------|---------|------|------------|

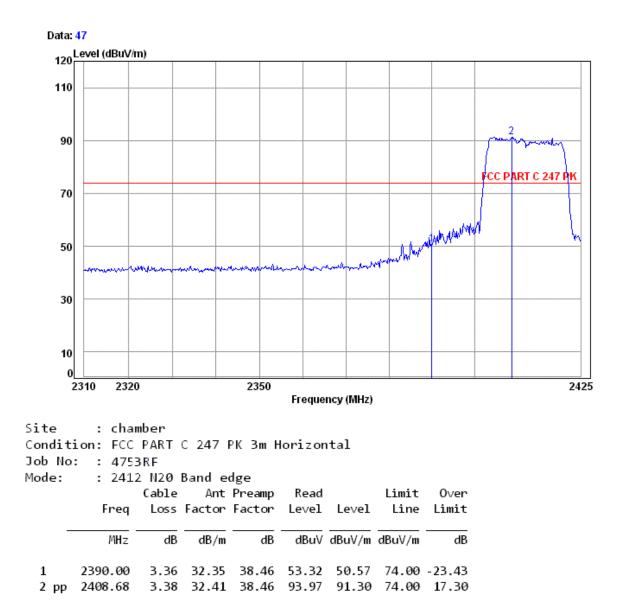



Report No.: SZEM140800475308 Page: 105 of 120


| Worse case mode: | Test channel: | Lowest | Remark: | Average | Vertical |
|------------------|---------------|--------|---------|---------|----------|
|------------------|---------------|--------|---------|---------|----------|

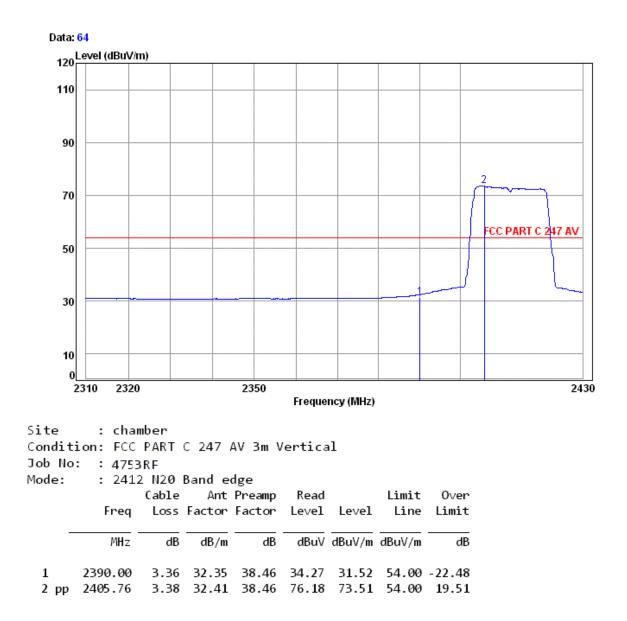



Report No.: SZEM140800475308 Page: 106 of 120


| Worse case mode: | Test channel: | Lowest | Remark: | Average | Horizontal | |
|------------------|---------------|--------|---------|---------|------------|--|
|------------------|---------------|--------|---------|---------|------------|--|

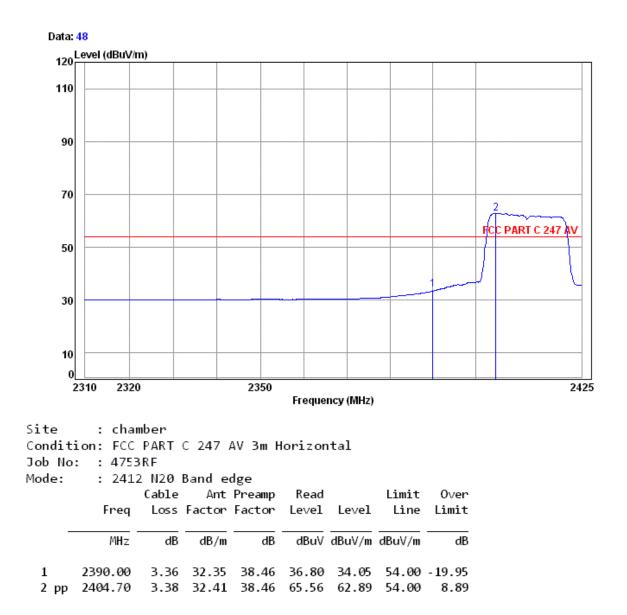



Report No.: SZEM140800475308 Page: 107 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Peak | Vertical |
|------------------|---------------|---------|---------|------|----------|
|------------------|---------------|---------|---------|------|----------|

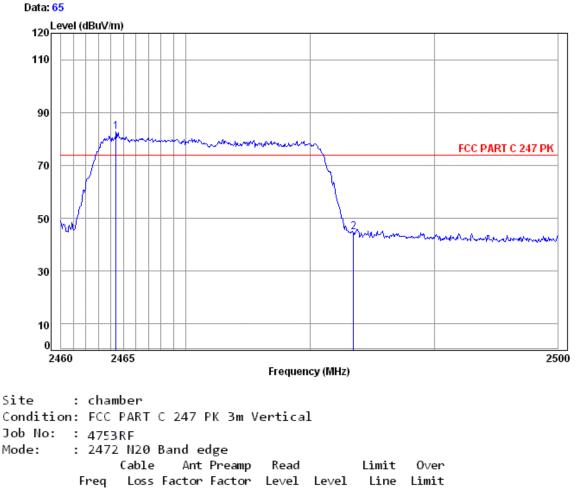


| - | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
|---|--------------------|----|------|----|------|--------|--------|----|
| | 2464.41 2483.50 | | | | | | | |



Report No.: SZEM140800475308 Page: 108 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Peak | Horizontal |
|------------------|---------------|---------|---------|------|------------|
|------------------|---------------|---------|---------|------|------------|

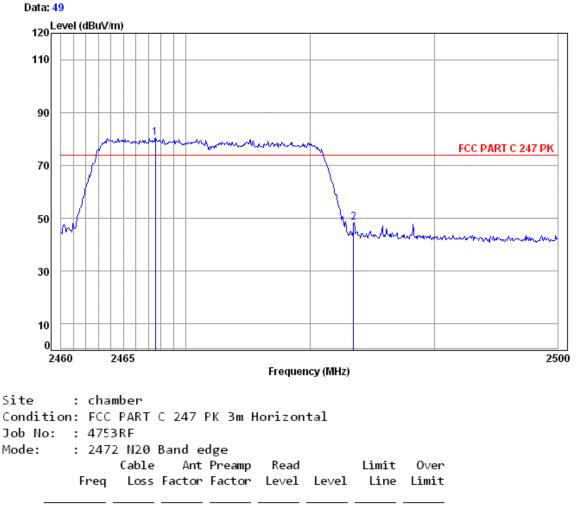


| - | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
|-----------|--------------------|----|------|----|------|--------|--------|----|
| 1 pp 2 | 2467.55 2483.50 | | | | | | | |



Report No.: SZEM140800475308 Page: 109 of 120


| Worse case mode: | Test channel: | Highest | Remark: | Average | Vertical |
|------------------|---------------|---------|---------|---------|----------|
|------------------|---------------|---------|---------|---------|----------|

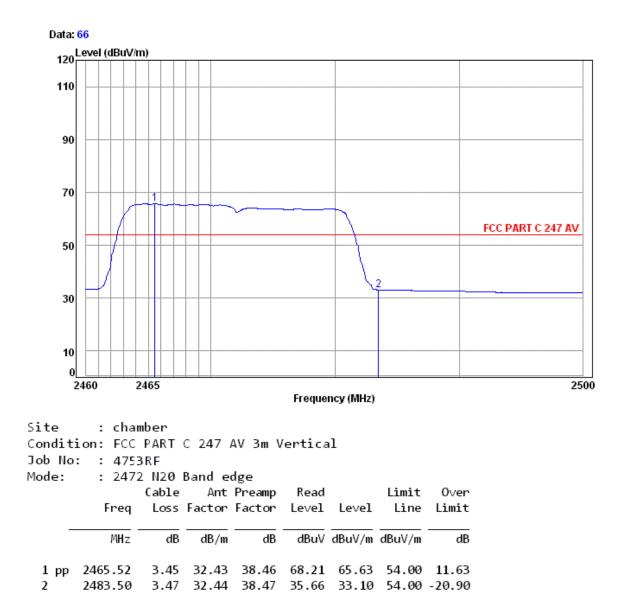



Report No.: SZEM140800475308 Page: 110 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Average | Horizontal | |
|------------------|---------------|---------|---------|---------|------------|--|
|------------------|---------------|---------|---------|---------|------------|--|

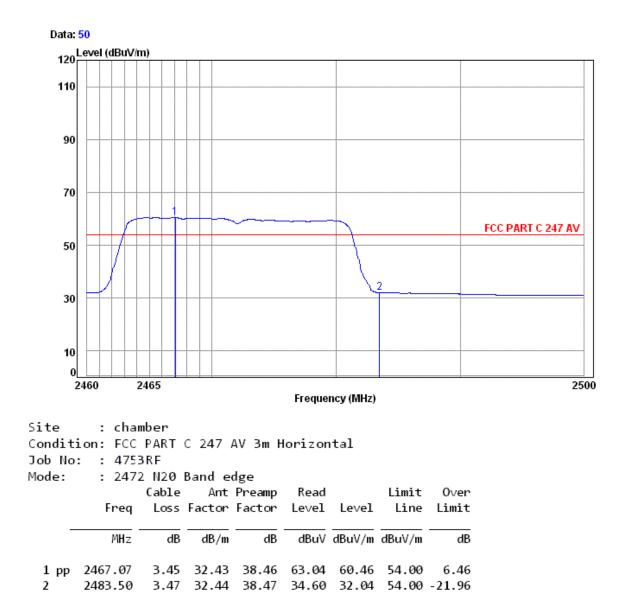




Report No.: SZEM140800475308 Page: 111 of 120

Test mode: 802.11n(HT40)

| Worse case mode: | Test channel: | Lowest | Remark: | Peak | Vertical | |
|------------------|---------------|--------|---------|------|----------|--|
|------------------|---------------|--------|---------|------|----------|--|

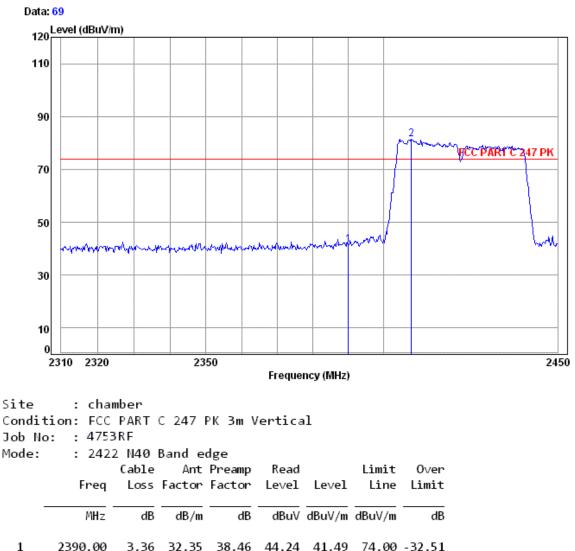


2 pp 2407.98 3.38 32.41 38.46 84.06 81.39 74.00 7.39



Report No.: SZEM140800475308 Page: 112 of 120


| Worse case mode: | Test channel: | Lowest | Remark: | Peak | Horizontal |
|------------------|---------------|--------|---------|------|------------|
| | | | | | |

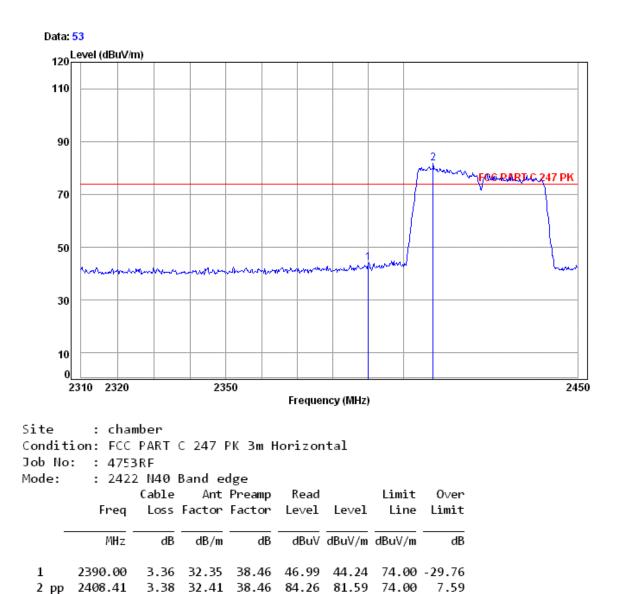



Report No.: SZEM140800475308 Page: 113 of 120


| Worse case mode: | Test channel: | Lowest | Remark: | Average | Vertical |
|------------------|---------------|--------|---------|---------|----------|
|------------------|---------------|--------|---------|---------|----------|

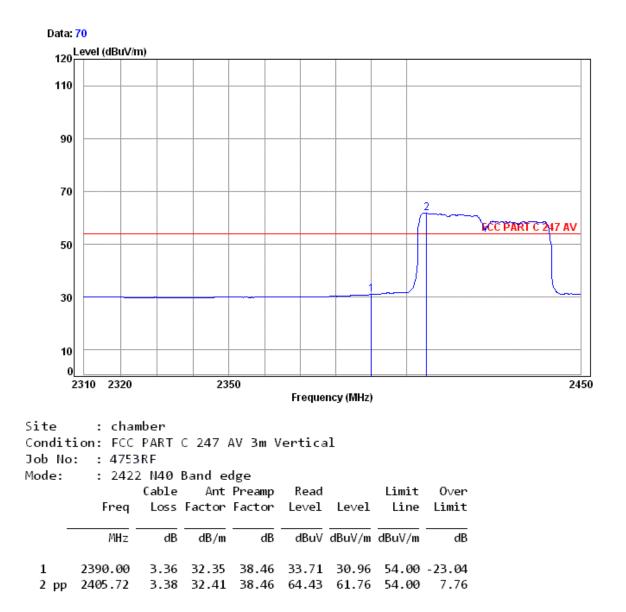



Report No.: SZEM140800475308 Page: 114 of 120


| Worse case mode: | Test channel: | Lowest | Remark: | Average | Horizontal |
|------------------|---------------|--------|---------|---------|------------|
|------------------|---------------|--------|---------|---------|------------|

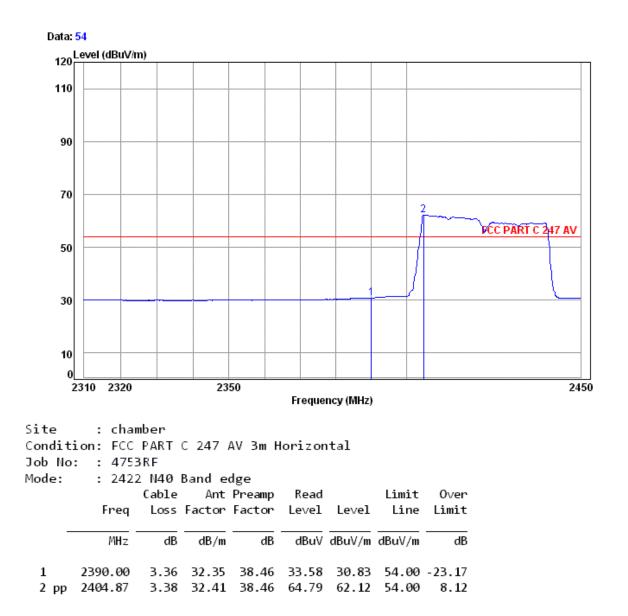



Report No.: SZEM140800475308 Page: 115 of 120


| Worse case mode: | Test channel: | Highest | Remark: | Peak | Vertical | |
|------------------|---------------|---------|---------|------|----------|--|
|------------------|---------------|---------|---------|------|----------|--|

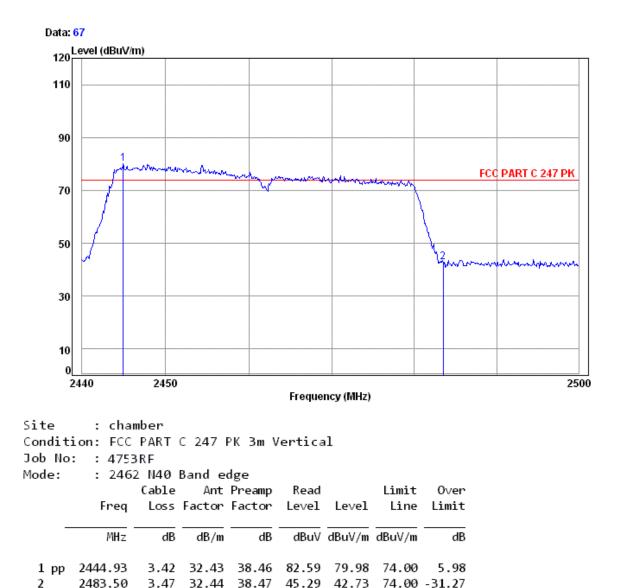



Report No.: SZEM140800475308 Page: 116 of 120


| Worse case mode: | Test channel: | Highest | Remark: | Peak | Horizontal |
|------------------|---------------|---------|---------|------|------------|
|------------------|---------------|---------|---------|------|------------|

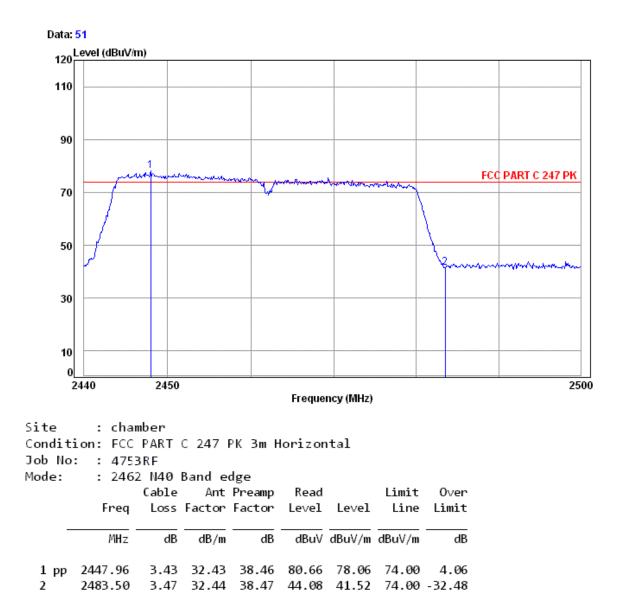



Report No.: SZEM140800475308 Page: 117 of 120


| Worse case mode: | Test channel: | Highest | Remark: | Average | Vertical |
|------------------|---------------|---------|---------|---------|----------|
|------------------|---------------|---------|---------|---------|----------|

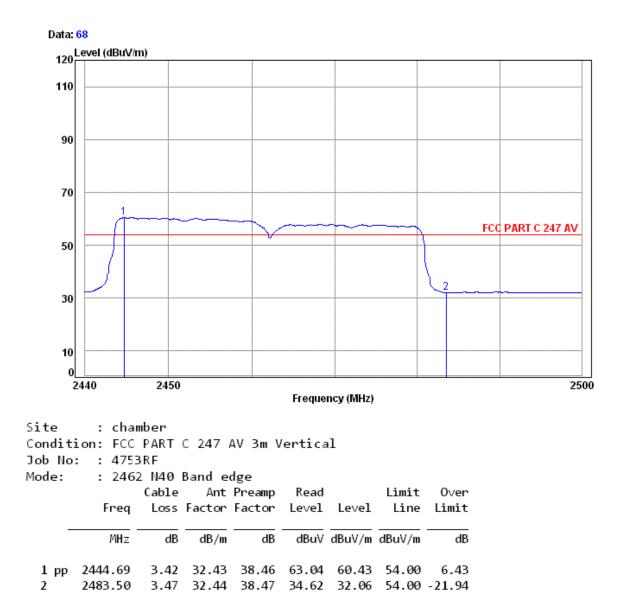



Report No.: SZEM140800475308 Page: 118 of 120

| Worse case mode: | Test channel: | Highest | Remark: | Average | Horizontal |
|------------------|---------------|---------|---------|---------|------------|
|------------------|---------------|---------|---------|---------|------------|

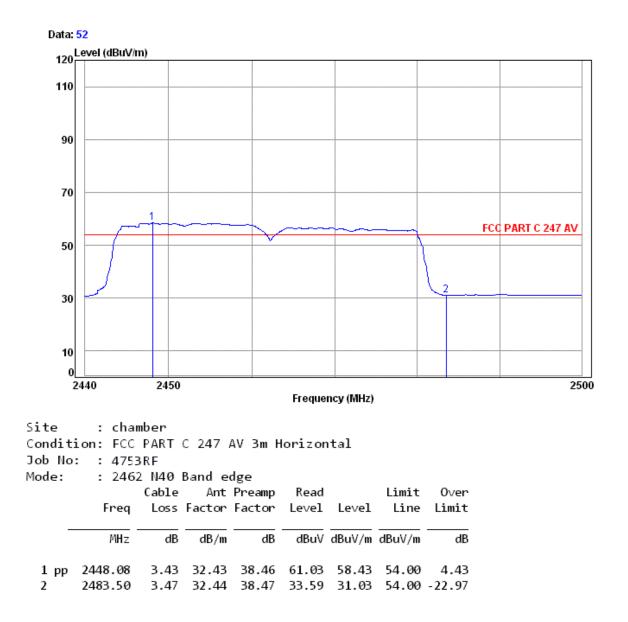

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor



Report No.: SZEM140800475308 Page: 119 of 120

7 Photographs - EUT Test Setup

Test model No.: Linklt ONE v1.0

7.1 Radiated Spurious Emission








Report No.: SZEM140800475308 Page: 120 of 120



7.2 Conducted Emission

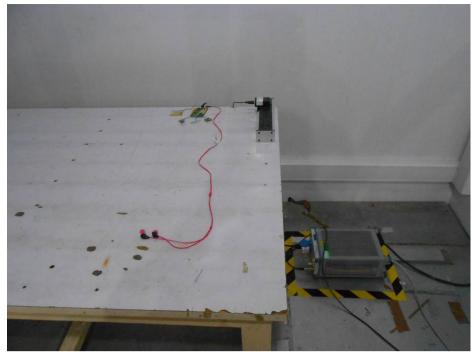

8 Photographs - EUT Constructional Details

Refer to Report No. SZEM140800475306 for EUT internal and external photos.