

Report No.: SZEM151000661901

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 98

### **FCC REPORT**

Application No:SZEM1510006619CRApplicant:Seeed Technology Co., LtdManufacturer:Seeed Technology Co., LtdFactory:Seeed Technology Co., Ltd

Product Name: Wio Link
Model No.(EUT): Wio Link
Trade Mark: Seeedstudio
FCC ID: Z4T-WIOLINK

Standards: 47 CFR Part 15, Subpart C (2014)

**Date of Receipt:** 2015-11-02

**Date of Test:** 2015-11-15 to 2015-12-02

**Date of Issue:** 2015-12-06

Test Result: PASS \*

. \* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM151000661901

Page: 2 of 98

#### 2 Version

Revision Record							
Version Chapter Date Modifier Remark							
00		2015-12-06		Original			

Authorized for issue by:		
Tested By	Benson Wang	2015-12-02
	(Benson Wang) /Project Engineer	Date
Prepared By	Joyce Shi	2015-12-06
	(Joyce Shi) /Clerk	Date
Checked By	Eric Fu	2015-12-06
	(Eric Fu) /Reviewer	Date



Report No.: SZEM151000661901

Page: 3 of 98

#### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10: 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10: 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10: 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10: 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10: 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10: 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10: 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10: 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10: 2013	PASS



Report No.: SZEM151000661901

Page: 4 of 98

#### 4 Contents

			Page
1	COV	ER PAGE	1
2	VED	SION	2
_	VEN	31014	
3	TES	T SUMMARY	3
4	COV	TENTS	4
-			
5	GEN	ERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT AND MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TES	T RESULTS AND MEASUREMENT DATA	12
	6.1	ANTENNA REQUIREMENT	12
	6.2	CONDUCTED EMISSIONS	13
	6.3	CONDUCTED PEAK OUTPUT POWER	17
	6.4	6DB OCCUPY BANDWIDTH	25
	6.5	POWER SPECTRAL DENSITY	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	RF CONDUCTED SPURIOUS EMISSIONS	
	6.8	RADIATED SPURIOUS EMISSIONS	
	6.8.1		
	6.8.2		
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	83
7	PHO	TOGRAPHS - EUT TEST SETUP	97
	7.1	CONDUCTED EMISSION	97
	7.2	RADIATED EMISSION	97
	7.3	RADIATED SPURIOUS EMISSION TEST SETUP	98
8	PHO	TOGRAPHS - EUT CONSTRUCTIONAL DETAILS	98



Report No.: SZEM151000661901

Page: 5 of 98

#### 5 General Information

#### 5.1 Client Information

Applicant:	Seeed Technology Co., Ltd		
Address of Applicant:	F5, Building 8, Shiling Industrial Park, Xinwei, Number32, Tongsha Road Xili Town, Nanshan District, Shenzhen, China.P.R.C		
Manufacturer:	Seeed Technology Co., Ltd		
Address of Manufacturer:	F5, Building 8, Shiling Industrial Park, Xinwei, Number32, Tongsha Road Xili Town, Nanshan District, Shenzhen, China.P.R.C		
Factory:	Seeed Technology Co., Ltd		
Address of Factory:	F5, Building 8, Shiling Industrial Park, Xinwei, Number32, Tongsha Road Xili Town, Nanshan District, Shenzhen, China.P.R.C		

#### 5.2 General Description of EUT

Product Name:	Wio Link		
Model No.	Wio Link		
Trade Mark:	Seeedstudio		
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz		
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels		
Channel Separation:	5MHz		
	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)		
Type of Modulation:	IEEE for 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)		
	IEEE for 802.11n(T20): OFDM (64QAM, 16QAM, QPSK,BPSK)		
Sample Type:	Mobile production		
Test Software of EUT:	SecureCRT		
Antenna Gain:	1.1dBi		
Antenna Type:	PIFA		
Power Supply:	Power by usb port / battery: DC 3.3V		



Report No.: SZEM151000661901

Page: 6 of 98

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel Frequency Channel Frequency Channel Frequency Channel Frequency							Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

#### For 802.11b/g/n (HT20):

Channel	Frequency		
The Lowest channel	2412MHz		
The Middle channel	2437MHz		
The Highest channel	2462MHz		



Report No.: SZEM151000661901

Page: 7 of 98

#### 5.3 Test Environment and Mode

Operating Environment:	Operating Environment:						
Temperature:	24.0 °C						
Humidity:	52 % RH						
Atmospheric Pressure: 1020 mbar							
Test mode:							
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all						
	kind of data rate.						

#### 5.4 Description of Support Units

The EUT and software are used only for configuration of engineering mode

Description	Manufacturer	Model No.				
Laptop	Lenovo	T430u				
Test software	N/A	SecureCRT				
USB cable	N/A	N/A				
Test load	N/A	N/A				
Rechargeable battery	N/A	N/A				

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM151000661901

Page: 8 of 98

#### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### · CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### · A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM151000661901

Page: 9 of 98

#### 5.10Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-05-13	2016-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-09	2016-10-09	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-13	2016-05-13	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T8-02	SEL0162	2015-08-30	2016-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T4-02	SEL0163	2015-08-30	2016-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T2-02	SEL0164	2015-08-30	2016-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-13	2016-05-13	
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-13	2016-05-13	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13	



Report No.: SZEM151000661901

Page: 10 of 98

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEL0303	2015-08-01	2016-08-01
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEL0175	2015-05-13	2016-05-13
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0288	2015-05-13	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0275	2015-05-13	2016-05-13
6	Coaxial cable	SGS	N/A	SEL0274	2015-05-13	2016-05-13
8	BiConiLog Antenna (30M-1GHz)	Schwarzbeck	VULB9160	SEL0309	2015-10-17	2018-10-17
9	Pre-amplifier	Sonoma Instrument Co	310N	SEL0298	2015-05-13	2016-05-13
10	Loop Antenna	ETS-LINDGREN	6502	SEL0802	2015-08-14	2016-08-14



Report No.: SZEM151000661901

Page: 11 of 98

RF connected test							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	2016-10-24	
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-17	2016-10-17	
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13	
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13	
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13	
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25	
8	POWER METER	R&S	NRVS	SEL0144	2015-10-09	2016-10-09	
9	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25	



Report No.: SZEM151000661901

Page: 12 of 98

#### 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

Standard 47 CFR Part 15C Section 15.203 /247(c) requirement:


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

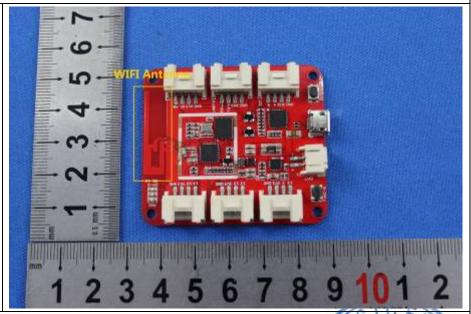

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.1dBi.



Report No.: SZEM151000661901

Page: 13 of 98


#### 6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207				
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	150kHz to 30MHz				
Limit:	Francisco (MIII-)	Limit (dBuV)			
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithm	n of the frequency.	-		
Test Procedure:	<ol> <li>The mains terminal disturb room.</li> <li>The EUT was connected to</li> </ol>	-		lded	
	Impedance Stabilization linear	•	•	5Ω	
	impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference				
	plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cable a				
	single LISN provided the rating of the LISN was not exceeded.  3) The tabletop EUT was placed upon a non-metallic table 0.8m above ground reference plane. And for floor-standing arrangement, the was				
	4) The test was performed with of the EUT shall be 0.4 m vertical ground reference preference plane. The LISN unit under test and bonded mounted on top of the group between the closest points the EUT and associated experiment and all of the integral of the property.	antal ground reference plane, med with a vertical ground reference plane. The rear 0.4 m from the vertical ground reference plane. The rence plane was bonded to the horizontal ground the LISN 1 was placed 0.8 m from the boundary of the bonded to a ground reference plane for LISNs the ground reference plane. This distance was points of the LISN 1 and the EUT. All other units of atted equipment was at least 0.8 m from the LISN 2. Inaximum emission, the relative positions of the interface cables must be changed according to on conducted measurement.			



Report No.: SZEM151000661901

Page: 14 of 98

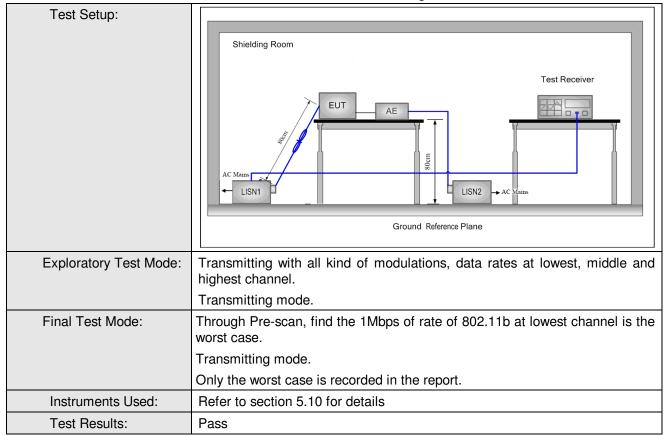



Report No.: SZEM151000661901


Page: 15 of 98

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

#### Live Line:

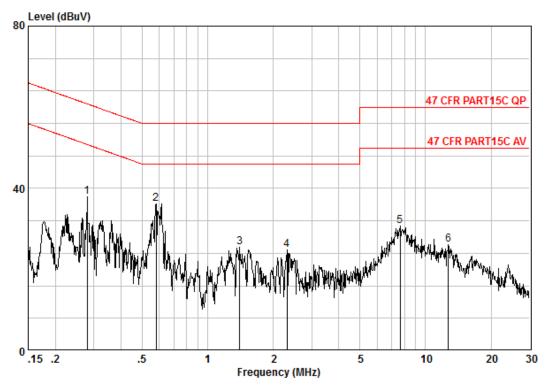

Site : Shielding Room

Condition : 47 CFR PART15C AV CE LINE

Job No. : 6619CR Test Mode : TX


	Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.28029	0.01	9.59	28.22	37.83	50.81	-12.98	Peak
2	0.57923	0.01	9.61	26.55	36.17	46.00	-9.83	Peak
3	1.403	0.02	9.59	15.91	25.52	46.00	-20.48	Peak
4	2.309	0.02	9.63	15.13	24.78	46.00	-21.22	Peak
5	7.646	0.01	9.69	20.94	30.64	50.00	-19.36	Peak
6	12.716	0.01	9.74	16.46	26.21	50.00	-23.79	Peak



Report No.: SZEM151000661901

Page: 16 of 98

#### Neutral Line:

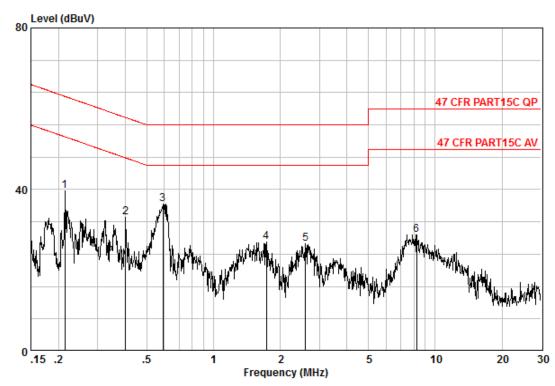

Site : Shielding Room

Condition : 47 CFR PART15C AV CE NEUTRAL

Job No. : 6619CR Test Mode : TX

	Freq		LISN Factor			Limit Line		Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.21392	0.02	9.62	29.97	39.61	53.05	-13.44	Peak
2	0.40187	0.01	9.62	23.46	33.09	47.81	-14.72	Peak
3	0.59164	0.01	9.63	26.85	36.50	46.00	-9.50	Peak
4	1.734	0.02	9.65	17.33	27.00	46.00	-19.00	Peak
5	2.594	0.02	9.67	16.94	26.63	46.00	-19.37	Peak
6	8.235	0.01	9.76	19.02	28.79	50.00	-21.21	Peak

#### Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM151000661901

Page: 17 of 98

#### 6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)		
Test Method:	ANSI C63.10: 2013		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 5.10 for details		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).		
Limit:	30dBm		
Test Results:	Pass		



Report No.: SZEM151000661901

Page: 18 of 98

Pre-scan under all rate at lowest channel 1								
Mode		802	.11b			_		
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	10.23	10.11	9.92	9.03				
Mode	802.11g							
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	9.30	9.28	9.12	9.17	8.45	8.50	8.52	8.58
Mode	802.11n(HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	9.33	9.21	9.14	9.13	9.22	9.12	9.09	9.02

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).



Report No.: SZEM151000661901

Page: 19 of 98

#### **Measurement Data**

vicasureriierii Data						
802.11b mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	10.26	30.00	Pass			
Middle	6.67	30.00	Pass			
Highest	3.40	30.00	Pass			
	802.11g mo	de				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	9.31	30.00	Pass			
Middle	6.04	30.00	Pass			
Highest	2.65	30.00	Pass			
	802.11n(HT20)	mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	9.39	30.00	Pass			
Middle	6.03	30.00	Pass			
Highest	2.47	30.00	Pass			




Report No.: SZEM151000661901


Page: 20 of 98

Test plot as follows:

Test mode: 802.11b Test channel: Lowest





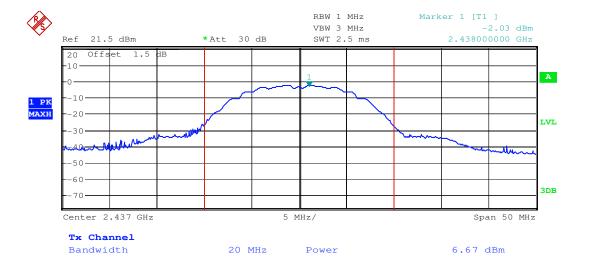





Report No.: SZEM151000661901

Page: 21 of 98

Test mode: 802.11b Test channel: Highest

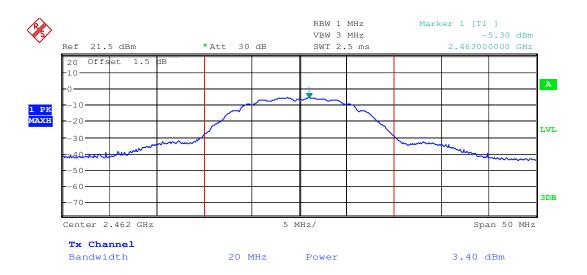



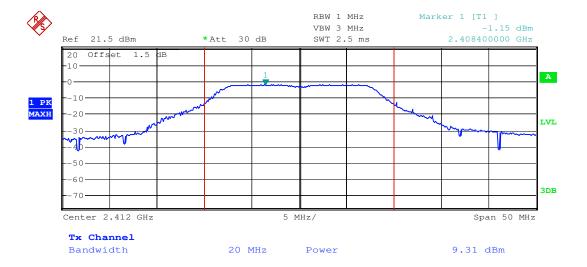




Report No.: SZEM151000661901

Page: 22 of 98

Test mode: 802.11g Test channel: Middle

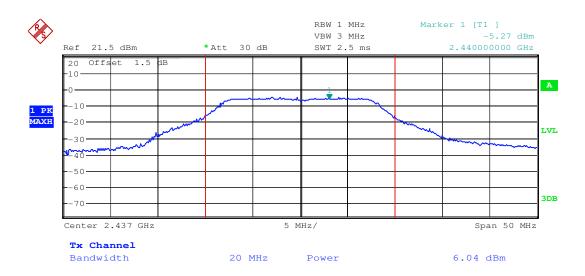

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------









Report No.: SZEM151000661901

Page: 23 of 98

Test mode: 802.11n(HT20) Test channel: Lowest

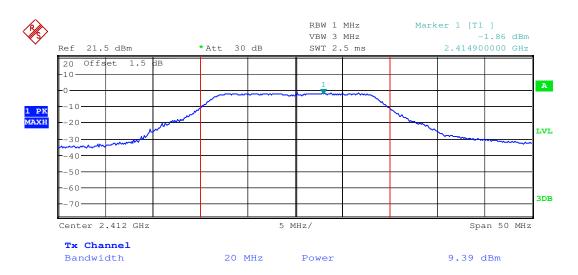



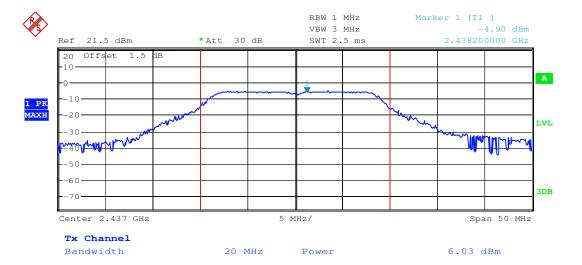




Report No.: SZEM151000661901

Page: 24 of 98

Test mode: 802.11n(HT20) Test channel: Highest

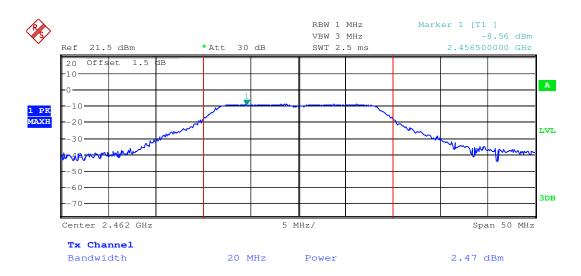




Report No.: SZEM151000661901

Page: 25 of 98

#### 6.4 6dB Occupy Bandwidth

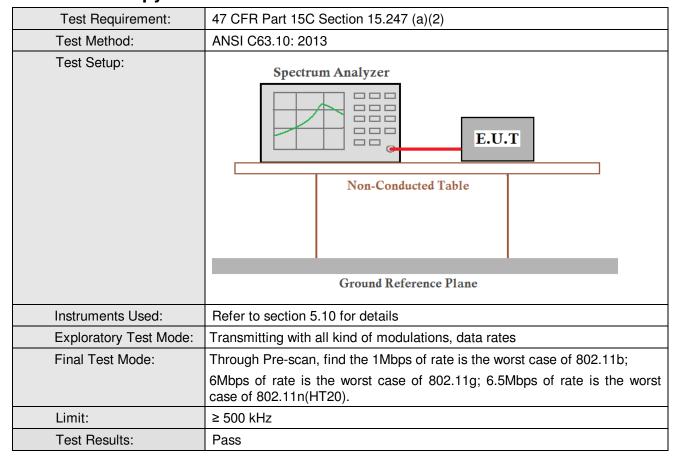



Report No.: SZEM151000661901

Page: 26 of 98

#### **Measurement Data**

802.11b mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
Lowest	12.09	≥500	Pass			
Middle	12.12	≥500	Pass			
Highest	12.09	≥500	Pass			
	802.11g mode					
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
Lowest	16.41	≥500	Pass			
Middle	16.41	≥500	Pass			
Highest	16.41	≥500	Pass			
	802.11n(HT20) mode					
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
Lowest	17.64	≥500	Pass			
Middle	17.67	≥500	Pass			
Highest	17.67	≥500	Pass			





Report No.: SZEM151000661901


Page: 27 of 98

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

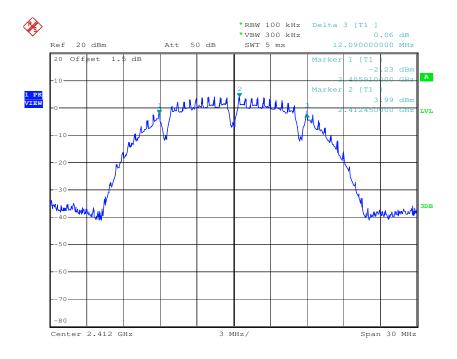



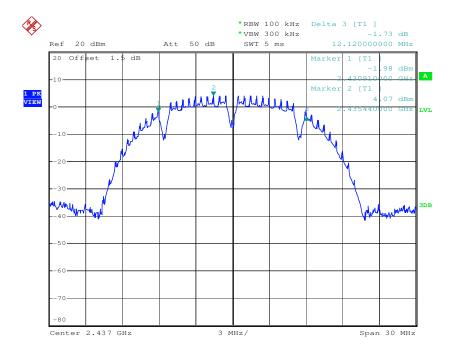





Report No.: SZEM151000661901

Page: 28 of 98

Test mode: 802.11b Test channel: Highest

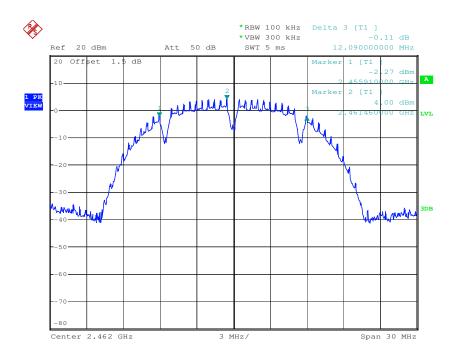

Test mode: 802.11g Test channel: Lowest

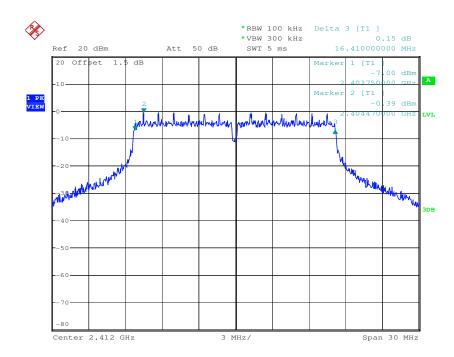





Report No.: SZEM151000661901

Page: 29 of 98

Test mode: 802.11g Test channel: Middle

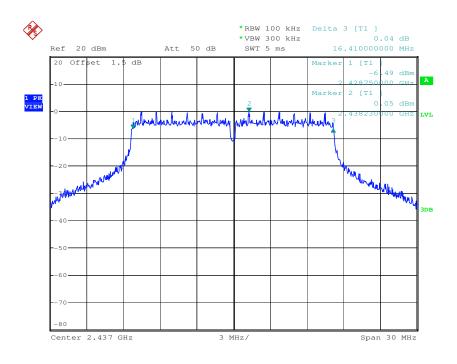



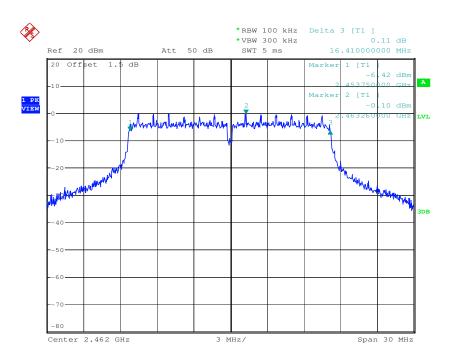





Report No.: SZEM151000661901

Page: 30 of 98

Test mode: 802.11n(HT20) Test channel: Lowest

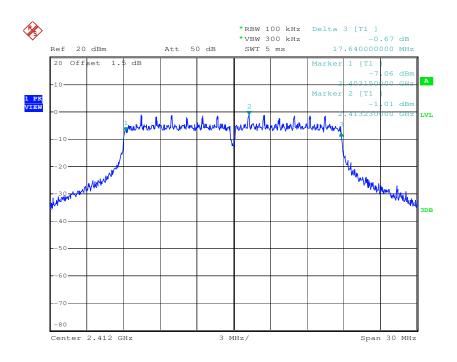



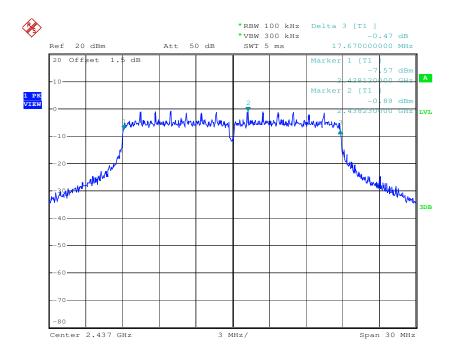




Report No.: SZEM151000661901

Page: 31 of 98

Test mode: 802.11n(HT20) Test channel: Highest

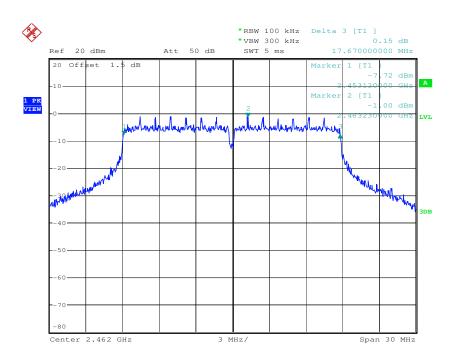



Report No.: SZEM151000661901

Page: 32 of 98

#### 6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)		
Test Method:	ANSI C63.10: 2013		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 5.10 for details		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).		
Limit:	≤8.00dBm/3kHz		
Test Results:	Pass		





Report No.: SZEM151000661901

Page: 33 of 98

#### **Measurement Data**

	802.11b mode						
Test channel	Power Spectral Density	Limit (dBm/3kHz)	Result				
	(dBm/3kHz)						
Lowest	-10.88	≤8.00	Pass				
Middle	-9.81	≤8.00	Pass				
Highest	-10.26	≤8.00	Pass				
	802.11g mode						
Test channel	Power Spectral Density	Limit (dBm/3kHz)	Result				
	(dBm/3kHz)						
Lowest	-14.18	≤8.00	Pass				
Middle	-13.88	≤8.00	Pass				
Highest	-13.29	≤8.00	Pass				
	802.11n (HT20) mod	e					
Test channel	Power Spectral Density	Limit (dBm/3kHz)	Result				
	(dBm/3kHz)						
Lowest	-14.94	≤8.00	Pass				
Middle	-15.71	≤8.00	Pass				
Highest	-15.72	≤8.00	Pass				




Report No.: SZEM151000661901


Page: 34 of 98

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

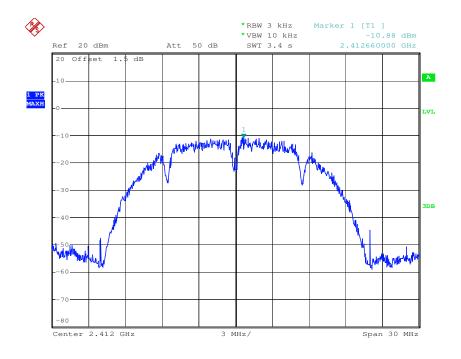



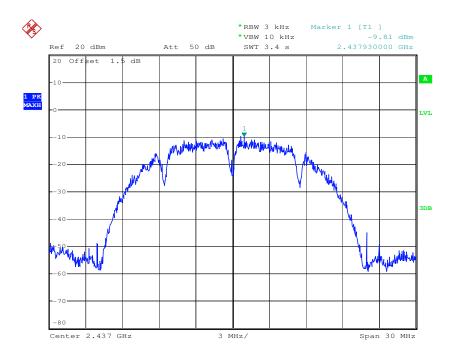





Report No.: SZEM151000661901

Page: 35 of 98

Test mode: 802.11b Test channel: Highest

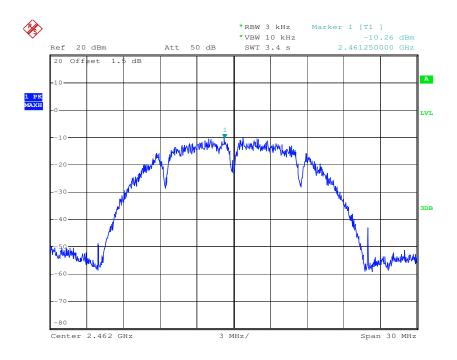



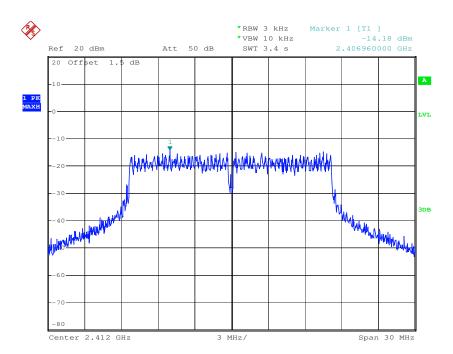





Report No.: SZEM151000661901

Page: 36 of 98

Test mode: 802.11g Test channel: Middle

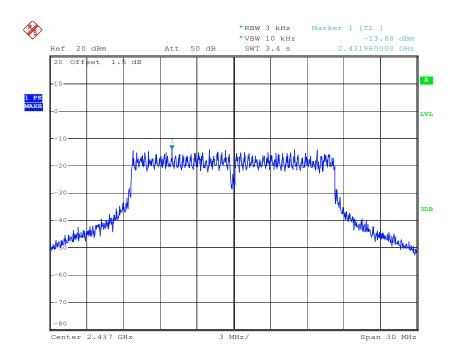



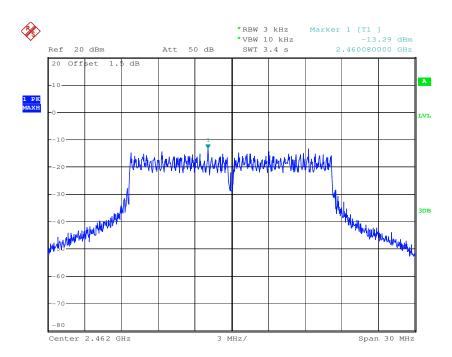






Report No.: SZEM151000661901

Page: 37 of 98

Test mode: 802.11n (HT20) Test channel: Lowest

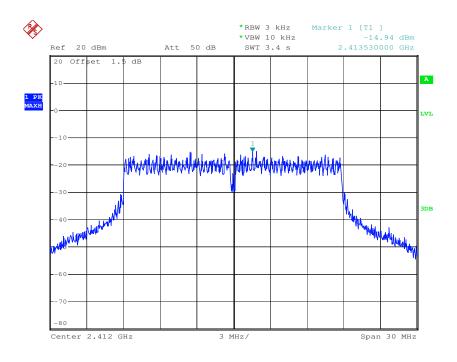



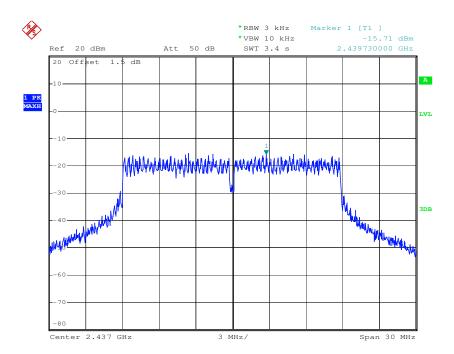




Report No.: SZEM151000661901

Page: 38 of 98

Test mode: 802.11n (HT20) Test channel: Highest

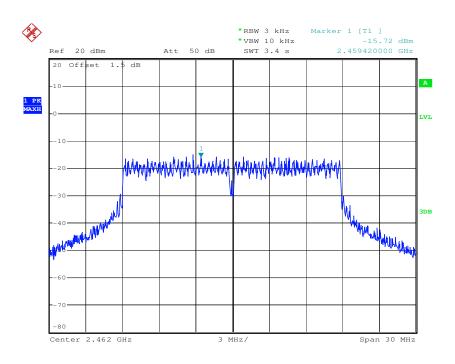



Report No.: SZEM151000661901

Page: 39 of 98

#### 6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10: 2013				
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates				
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Instruments Used:	Refer to section 5.10 for details				
Test Results:	Pass				




Report No.: SZEM151000661901


Page: 40 of 98

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

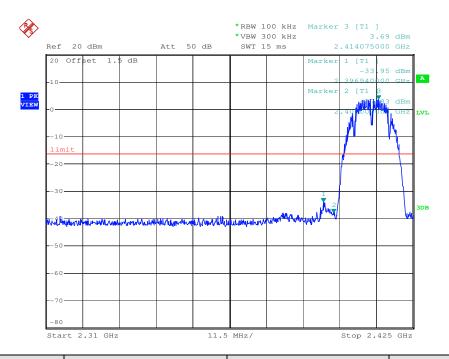

Test mode: 802.11b Test channel: Highest

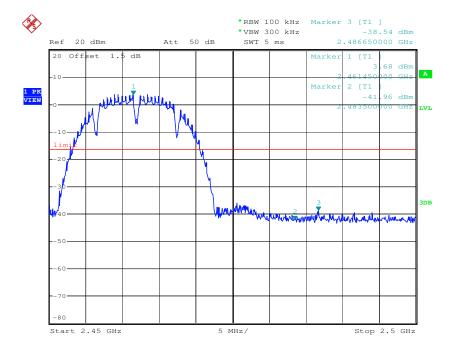





Report No.: SZEM151000661901

Page: 41 of 98

Test mode: 802.11g Test channel: Lowest

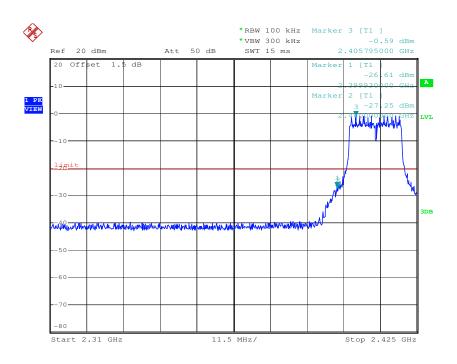



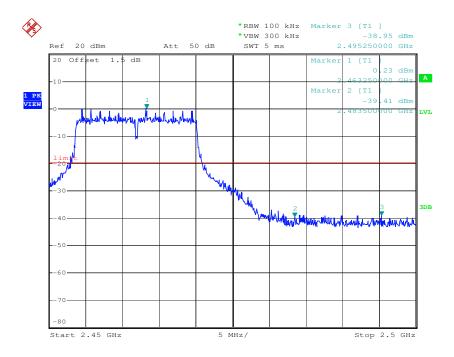





Report No.: SZEM151000661901

Page: 42 of 98

Test mode: 802.11n (HT20) Test channel: Lowest

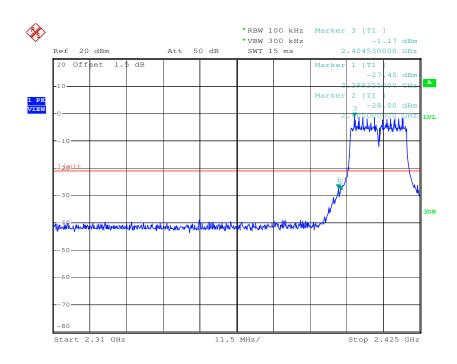



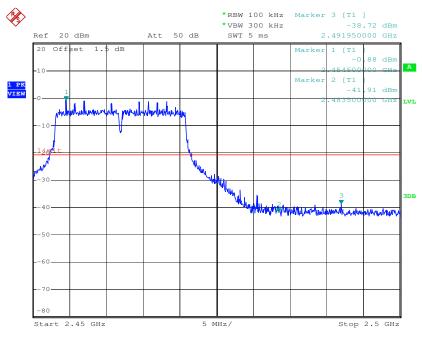





Report No.: SZEM151000661901

Page: 43 of 98

#### 6.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	ANSI C63.10: 2013					
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table					
	Ground Reference Plane					
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates					
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;					
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case					
	of 802.11n(HT20).					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread					
	spectrum intentional radiator is operating, the radio frequency power that is					
	produced by the intentional radiator shall be at least 20 dB below that in the					
	100 kHz bandwidth within the band that contains the highest level of the					
	desired power, based on either an RF conducted or a radiated					
	measurement.					
Instruments Used:	Refer to section 5.10 for details					
Test Results:	Pass					





Report No.: SZEM151000661901

Page: 44 of 98

#### Test plot as follows:

Test mode: 802.11b Test channel: Lowest

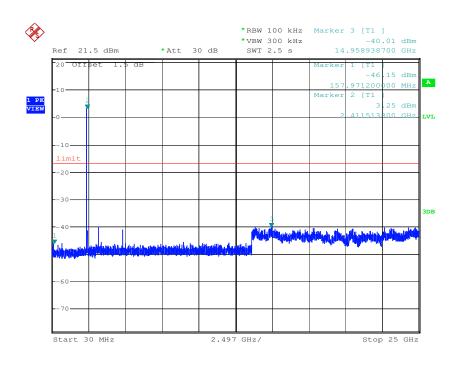


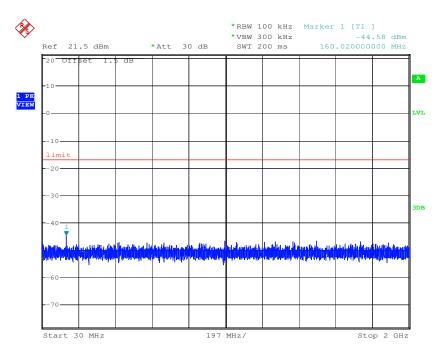




Report No.: SZEM151000661901

Page: 45 of 98

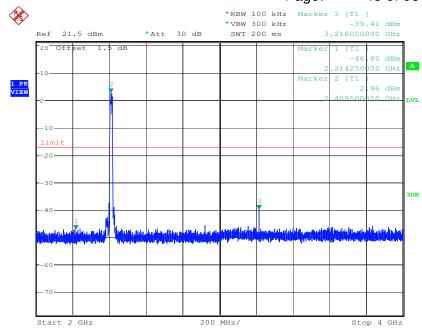


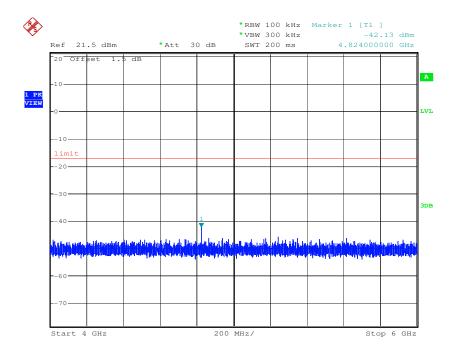




Report No.: SZEM151000661901

Page: 46 of 98

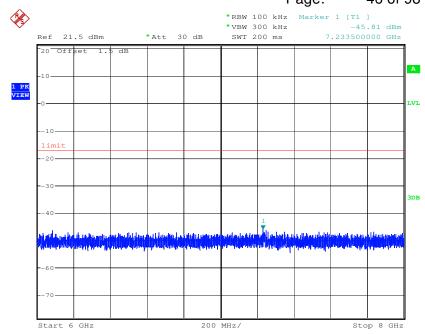

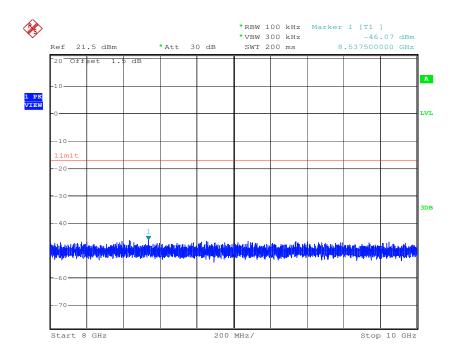





Report No.: SZEM151000661901

Page: 47 of 98

Test mode: 802.11b Test channel: Middle

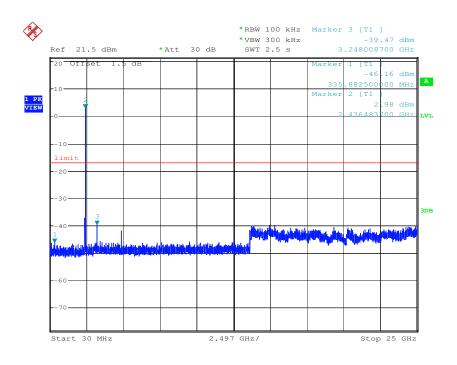


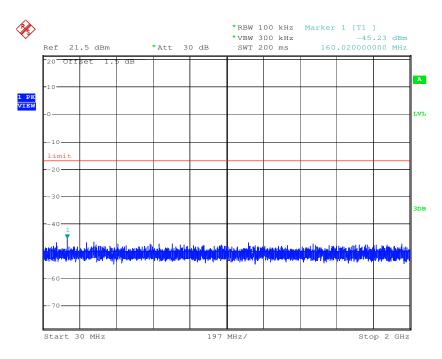




Report No.: SZEM151000661901

Page: 48 of 98

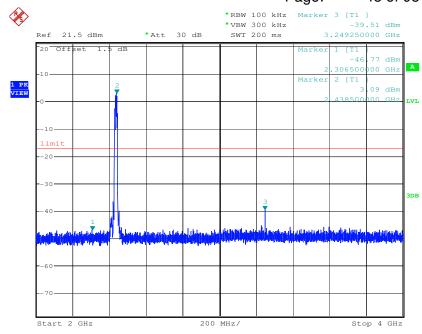


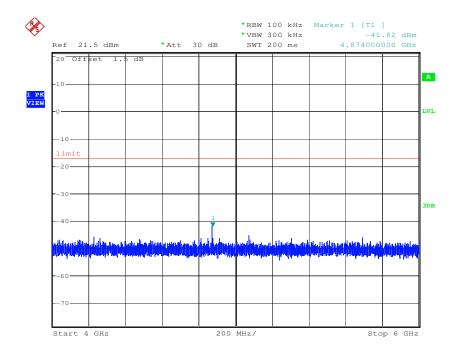




Report No.: SZEM151000661901

Page: 49 of 98

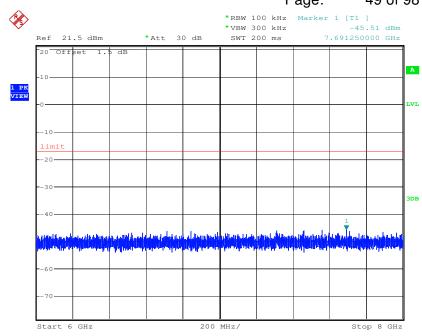

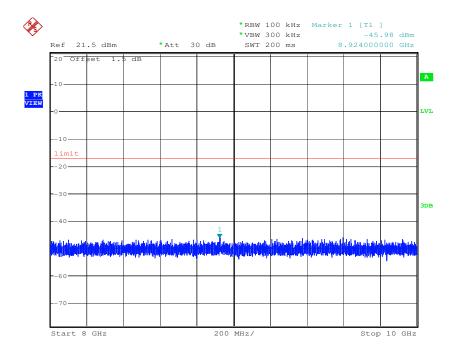





Report No.: SZEM151000661901

Page: 50 of 98


Test mode: 802.11b Test channel: Highest

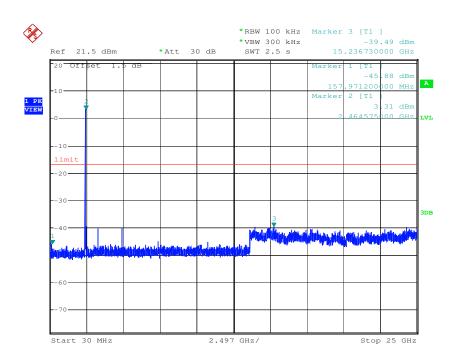


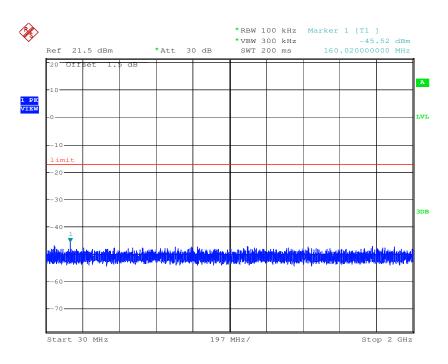



Report No.: SZEM151000661901

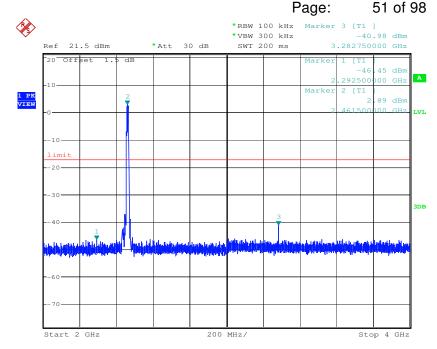


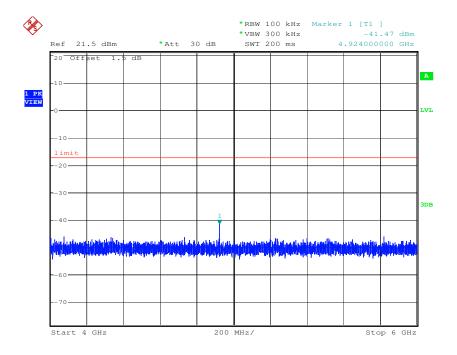




Report No.: SZEM151000661901

52 of 98 Page:

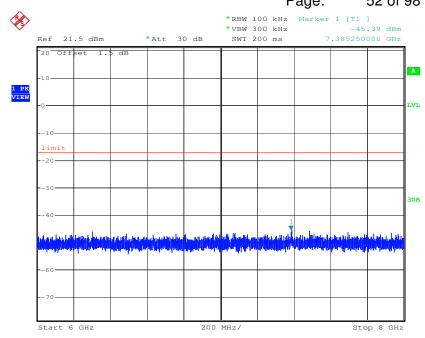

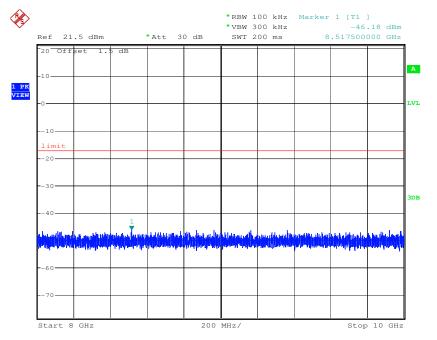






Report No.: SZEM151000661901

Page: 53 of 98

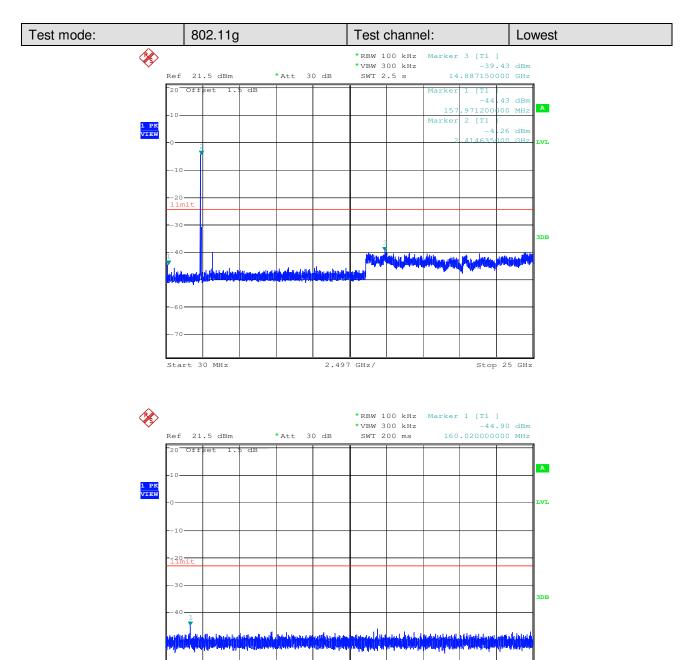

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

197 MHz/


Stop 2 GHz


Start 30 MHz



Report No.: SZEM151000661901

Page: 54 of 98

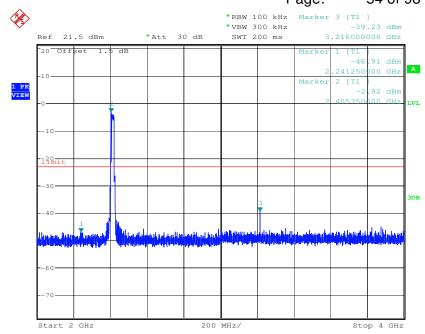


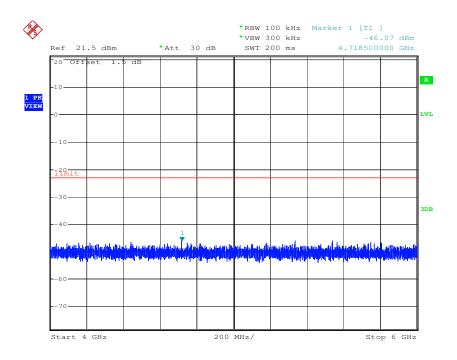




Report No.: SZEM151000661901

Page: 55 of 98

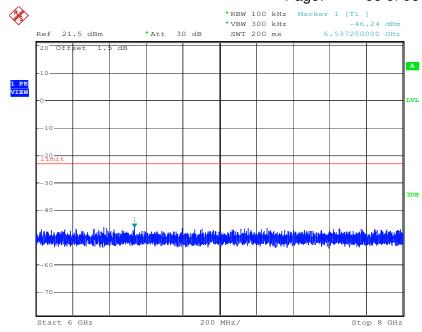

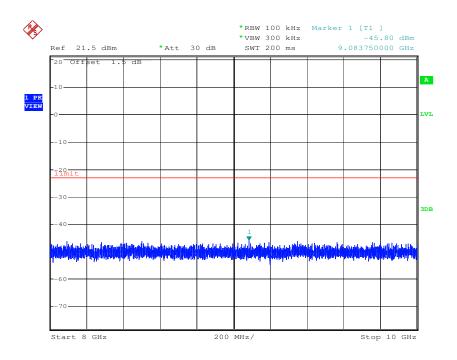





Report No.: SZEM151000661901

Page: 56 of 98


Test mode: 802.11g Test channel: Middle

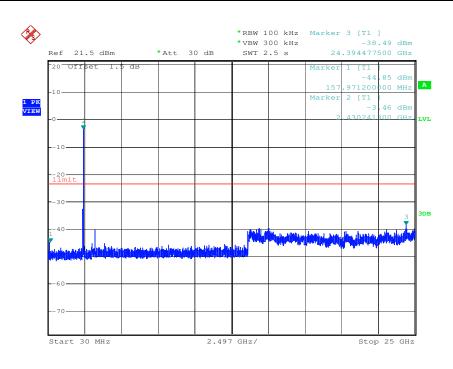


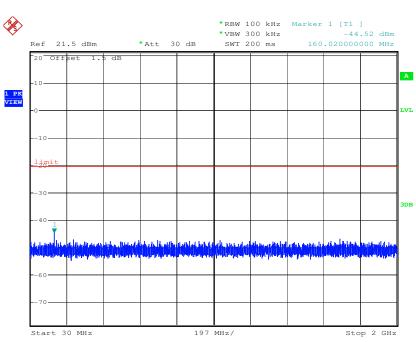



Report No.: SZEM151000661901

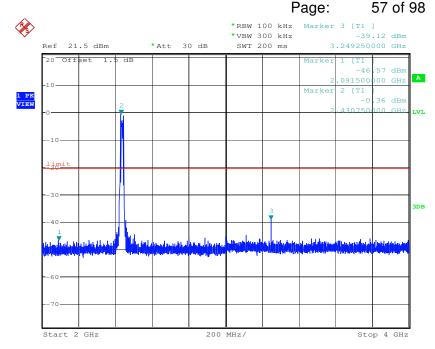


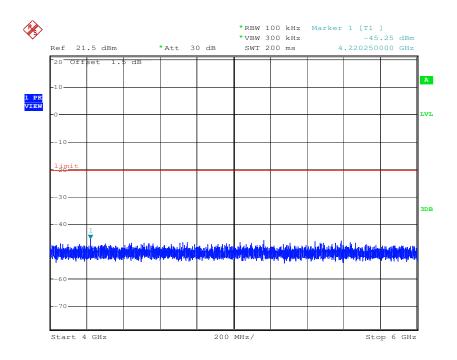




Report No.: SZEM151000661901

Page: 58 of 98

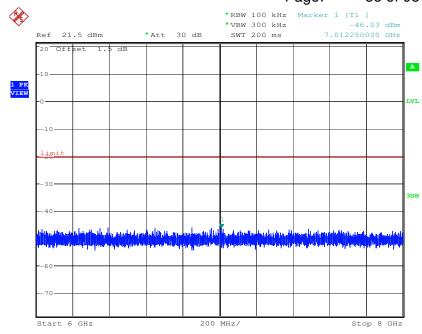

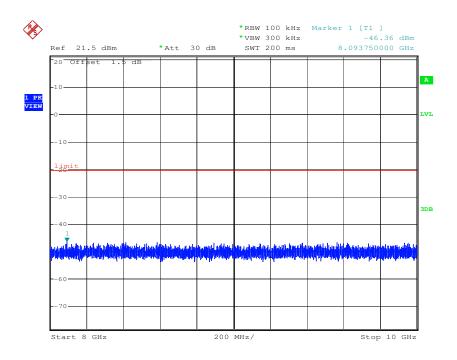





Report No.: SZEM151000661901

Page: 59 of 98

Test mode: 802.11g Test channel: Highest

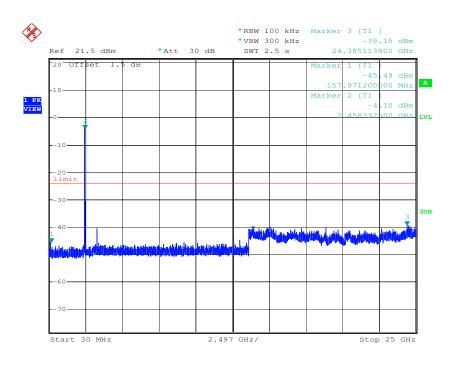


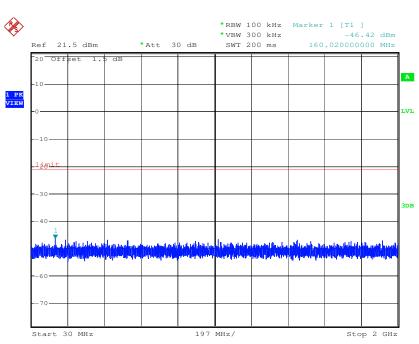




Report No.: SZEM151000661901

Page: 60 of 98

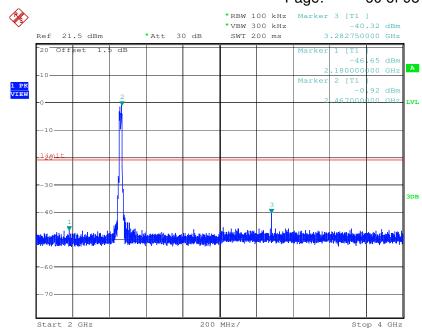


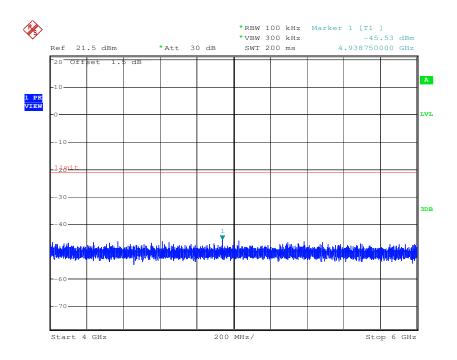




Report No.: SZEM151000661901

Page: 61 of 98

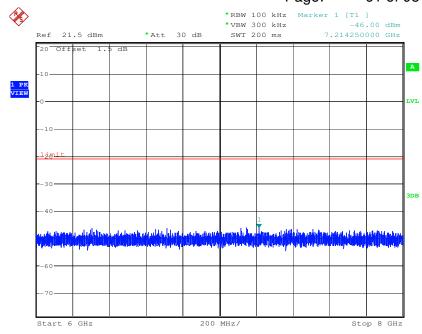

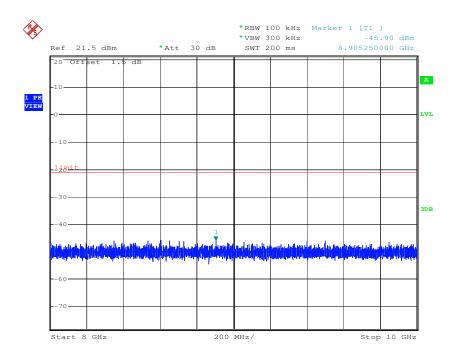





Report No.: SZEM151000661901

Page: 62 of 98

Test mode: 802.11n (HT20) Test channel: Lowest

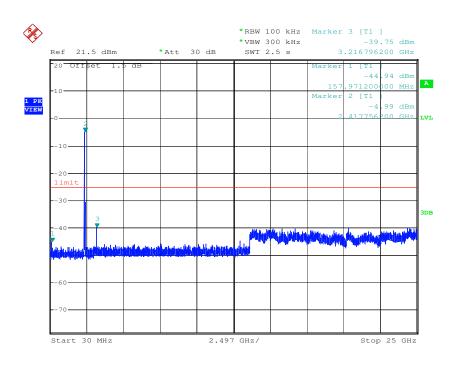

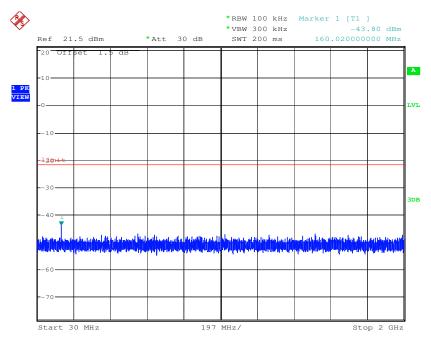







Report No.: SZEM151000661901

Page: 63 of 98

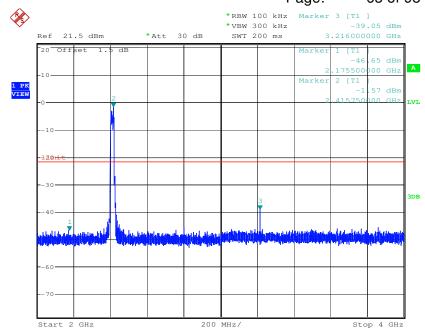


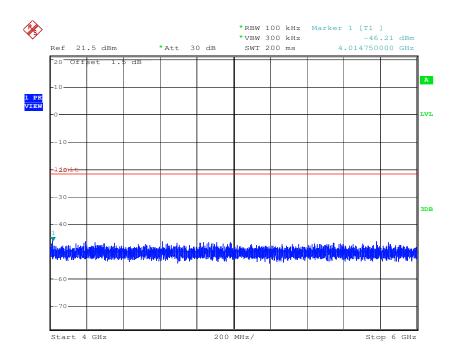




Report No.: SZEM151000661901

Page: 64 of 98

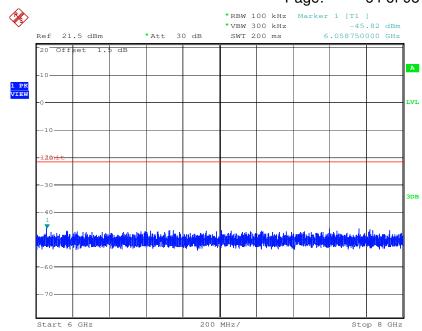

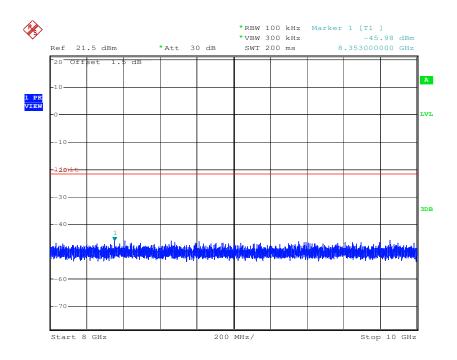





Report No.: SZEM151000661901

Page: 65 of 98

Test mode: 802.11n (HT20) Test channel: Middle

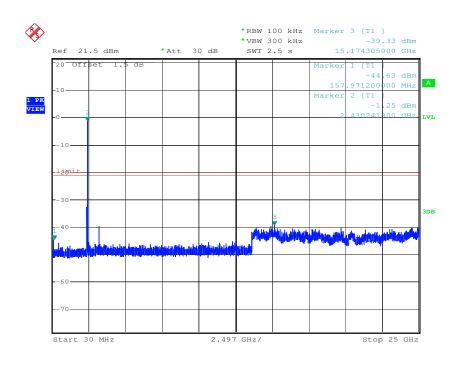


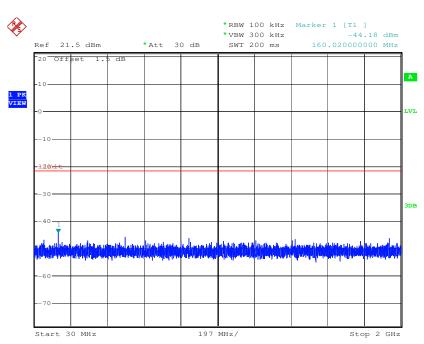




Report No.: SZEM151000661901

Page: 66 of 98

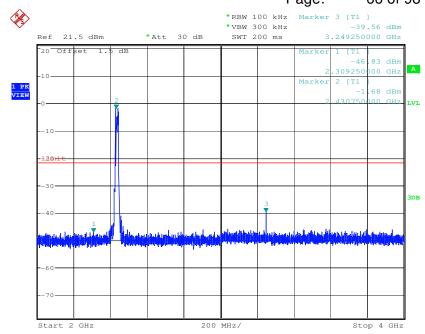


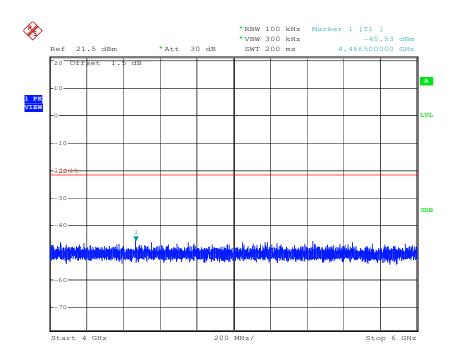




Report No.: SZEM151000661901

Page: 67 of 98

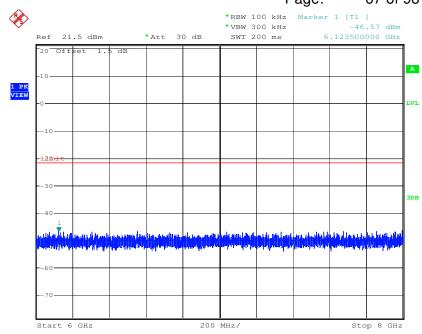

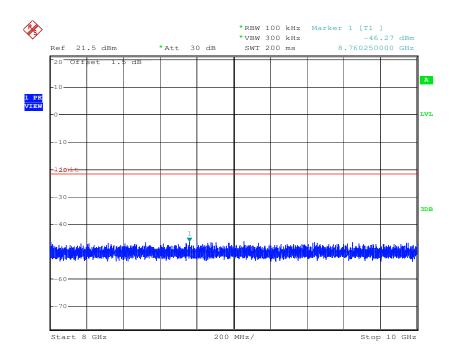





Report No.: SZEM151000661901

Page: 68 of 98

Test mode: 802.11n (HT20) Test channel: Highest

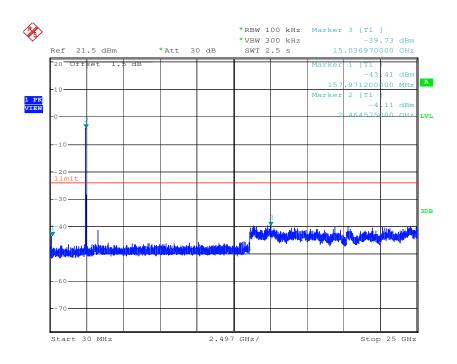


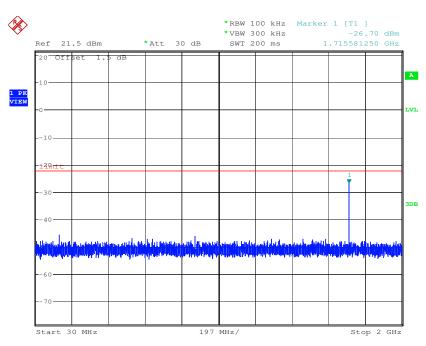




Report No.: SZEM151000661901

Page: 69 of 98

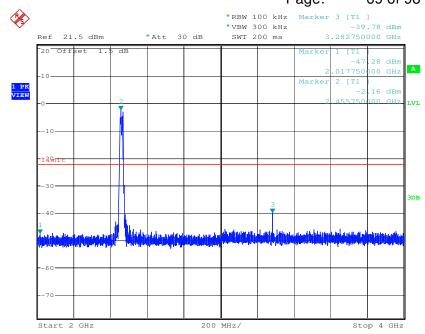


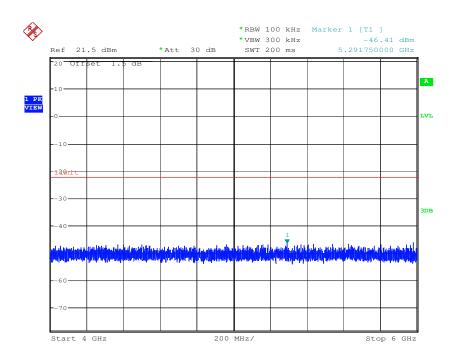



Report No.: SZEM151000661901

Page: 70 of 98

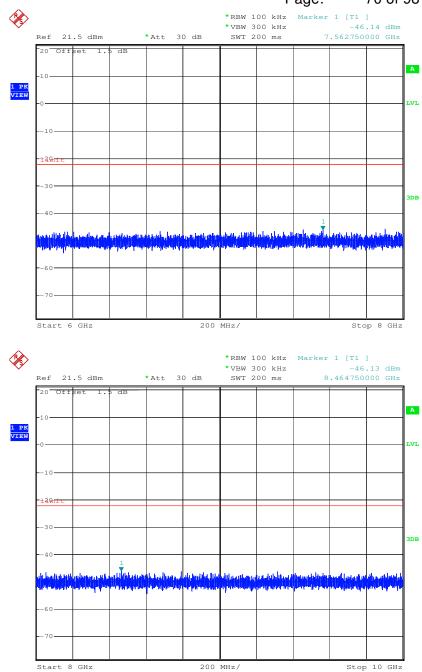

#### Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM151000661901

Page: 71 of 98

#### 6.8 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10: 2013						
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)						
	Measurement Distance: 10m (Semi-Anechoic Chamber)						
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark		
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak		
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average		
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak		
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average		
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
		Peak	1MHz	10Hz	Average		
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)		
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30		
	1.705MHz-30MHz	30	-	-	30		
	30MHz-88MHz	29.9	29.5	Quasi-peak	10		
	88MHz-216MHz	44.7	33.0	Quasi-peak	10		
	216MHz-960MHz	60.3	35.6	Quasi-peak	10		
	960MHz-1GHz	100	43.5	Quasi-peak	10		
	Above 1GHz	500	54.0	Average	3		
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.						



Report No.: SZEM151000661901

Page: 72 of 98

#### Test Setup:

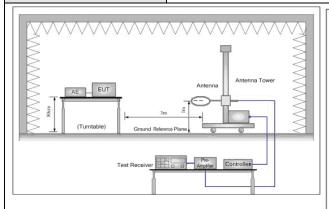

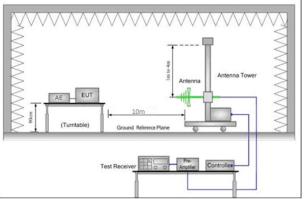


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

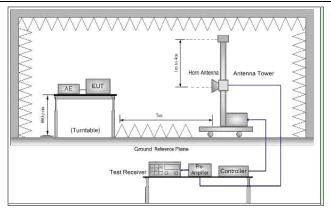


Figure 3. Above 1 GHz

#### Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 and 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.



Report No.: SZEM151000661901

Page: 73 of 98

	1 age. 70 01 00
	f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
	h. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
	Repeat above procedures until all frequencies measured was complete.
Exploratory Test	Transmitting with all kind of modulations, data rates.
Mode:	Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode.
	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case
	of 802.11n(HT20).
	For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM151000661901

Page: 74 of 98

#### 6.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

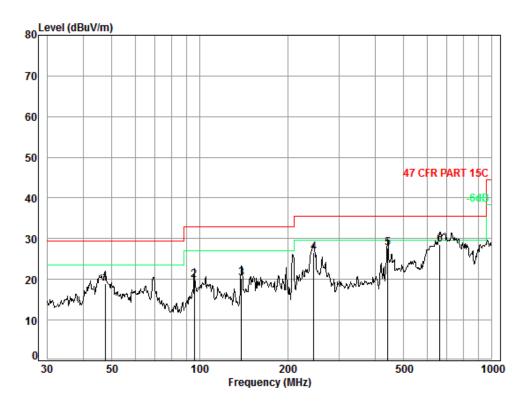

Condition: 47 CFR PART 15C 10m Vertical

Job No. : 6619CR Test Mode: TX mode


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	47.33	6.85	12.47	33.00	32.65	18.97	29.50	-10.53
2	95.76	7.20	9.09	32.81	36.29	19.77	33.00	-13.23
3	138.87	7.39	12.49	32.75	33.20	20.33	33.00	-12.67
4	245.95	7.83	11.32	32.65	40.00	26.50	35.60	-9.10
5	440.20	8.40	16.30	32.60	35.68	27.78	35.60	-7.82
6 pp	665.80	9.07	20.95	32.60	31.18	28.60	35.60	-7.00



Report No.: SZEM151000661901

Page: 75 of 98



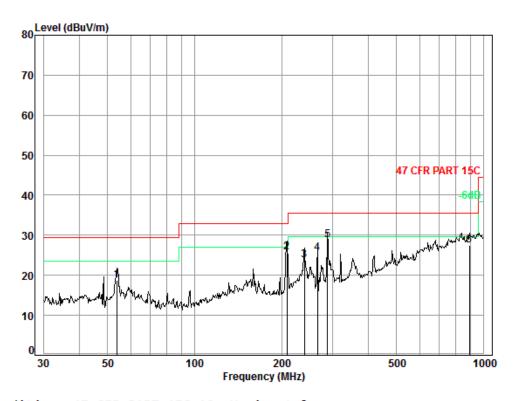

Condition: 47 CFR PART 15C 10m Horizontal

Job No. : 6619CR Test Mode: TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	53.69	6.97	12.40	32.98	32.35	18.74	29.50	-10.76
2	208.58	7.64	9.77	32.69	40.91	25.63	33.00	-7.37
3	239.99	7.80	11.20	32.66	37.38	23.72	35.60	-11.88
4	266.61	7.94	11.93	32.63	38.31	25.55	35.60	-10.05
5 pp	287.99	8.02	12.56	32.61	40.73	28.70	35.60	-6.90
6	893.86	9.50	22.84	32.51	27.65	27.48	35.60	-8.12



Report No.: SZEM151000661901

Page: 76 of 98

#### 6.8.2 Transmitter emission above 1GHz

Test mode:	8	302.1	11b	Test cha	nnel:	Lowest	Remark:		Peak
Frequency (MHz)	Cabl Loss (dB)	s	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Ove Limi (dB)	t Polarization
3810	-31.2	2	33.1	0	40.40	42.3	74	-31.7	7 Vertical
4824	-30.4	4	34.4	0	46.60	50.6	74	-23.4	4 Vertical
6000	-28.8	8	34.9	0	40.50	46.6	74	-27.4	4 Vertical
7236	-27.9	9	35.8	0	37.40	45.3	74	-28.7	7 Vertical
9648	-25	,	37.2	0	35.30	47.5	74	-26.5	5 Vertical
12495	-23	}	38	0	34.10	49.1	74	-24.9	9 Vertical
3765	-31.	1	32.9	0	42.90	44.7	74	-29.3	B Horizontal
4824	-30.4	4	34.4	0	48.40	52.4	74	-21.6	6 Horizontal
5850	-29.4	4	34.4	0	39.50	44.5	74	-29.5	5 Horizontal
7236	-27.9	9	35.8	0	37.50	45.4	74	-28.6	6 Horizontal
9648	-25	,	37.2	0	35.60	47.8	74	-26.2	2 Horizontal
12510	-23	}	38	0	35.20	50.2	74	-23.8	B Horizontal

Test mode:	802	.11b	Test cha	annel:	Lowest	Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Ove Limi (dB)	t Polarization
4824	-30.4	34.4	0	46.00	50.0	54	-4.0	Horizontal



Report No.: SZEM151000661901

Page: 77 of 98

Test mode:	802	2.11b	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3750	-31.1	32.9	0	43.10	44.9	74	-29.1	Vertical
4874	-30.4	34.5	0	45.00	49.1	74	-24.9	Vertical
6000	-28.8	34.9	0	39.90	46.0	74	-28.0	Vertical
7311	-27.9	35.7	0	38.80	46.6	74	-27.4	Vertical
9748	-25	37.3	0	36.40	48.7	74	-25.3	Vertical
12630	-23	38.1	0	34.20	49.3	74	-24.7	Vertical
3750	-31.1	32.9	0	42.90	44.7	74	-29.3	Horizontal
4874	-30.4	34.5	0	46.00	50.1	74	-23.9	Horizontal
6000	-28.8	34.9	0	38.90	45.0	74	-29.0	Horizontal
7311	-27.9	35.7	0	37.70	45.5	74	-28.5	Horizontal
9748	-25	37.3	0	36.10	48.4	74	-25.6	Horizontal
12600	-22.8	38.1	0	34.60	49.9	74	-24.1	Horizontal



Report No.: SZEM151000661901

Page: 78 of 98

Test mode:	802.11b		Test cha	ınnel:	Highest	Remark:		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3765	-31.1	32.9	0	42.50	44.3	74	-29.7	Vertical	
4924	-30.3	34.6	0	46.30	50.6	74	-23.4	Vertical	
6000	-28.8	34.9	0	40.20	46.3	74	-27.7	Vertical	
7386	-27.9	35.7	0	38.00	45.8	74	-28.2	Vertical	
9848	-24.2	37.3	0	35.80	48.9	74	-25.1	Vertical	
12630	-23	38.1	0	34.90	50.0	74	-24.0	Vertical	
3765	-31.1	32.9	0	43.50	45.3	74	-28.7	Horizontal	
4924	-30.3	34.6	0	47.70	52.0	74	-22.0	Horizontal	
6135	-29.3	35	0	40.00	45.7	74	-28.3	Horizontal	
7386	-27.9	35.7	0	37.80	45.6	74	-28.4	Horizontal	
9848	-24.2	37.3	0	36.00	49.1	74	-24.9	Horizontal	
12615	-22.9	38.1	0	34.90	50.1	74	-23.9	Horizontal	

Test mode:	802	11b	Test cha	annel:	Highest	Remark:	Av		Average	
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBµV/m)	Ove Limi (dB)	it	Polarization	
4924	-30.3	34.6	0	45.40	49.7	54	-4.3	3	Horizontal	



Report No.: SZEM151000661901

Page: 79 of 98

Test mode:	80	2.11g	Test cha	ınnel:	Lowest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3765	-31.1	32.9	0	45.20	47.0	74	-27.0	Vertical
4824	-30.4	34.4	0	40.40	44.4	74	-29.6	Vertical
5955	-29	34.7	0	39.90	45.6	74	-28.4	Vertical
7236	-27.9	35.8	0	37.50	45.4	74	-28.6	Vertical
9648	-25	37.2	0	35.00	47.2	74	-26.8	Vertical
12645	-23.1	38.1	0	34.60	49.6	74	-24.4	Vertical
3825	-31.2	33.2	0	39.80	41.8	74	-32.2	Horizontal
4824	-30.4	34.4	0	40.60	44.6	74	-29.4	Horizontal
5985	-28.9	34.8	0	39.00	44.9	74	-29.1	Horizontal
7236	-27.9	35.8	0	37.50	45.4	74	-28.6	Horizontal
9648	-25	37.2	0	35.60	47.8	74	-26.2	Horizontal
12660	-23.2	38.1	0	34.70	49.6	74	-24.4	Horizontal

Test mode:	802	2.11g	Test cha	ınnel:	Middle	Remark:		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		
3945	-31.1	33.2	0	39.80	41.9	74	-32.1	Vertical	
4874	-30.4	34.5	0	40.50	44.6	74	-29.4	Vertical	
6195	-29.2	34.9	0	39.20	44.9	74	-29.1	Vertical	
7311	-27.9	35.7	0	38.00	45.8	74	-28.2	Vertical	
9748	-25	37.3	0	35.30	47.6	74	-26.4	Vertical	
12630	-23	38.1	0	35.10	50.2	74	-23.8	Vertical	
3765	-31.1	32.9	0	43.20	45.0	74	-29.0	Horizontal	
4874	-30.4	34.5	0	40.30	44.4	74	-29.6	Horizontal	
6045	-29	35	0	39.70	45.7	74	-28.3	Horizontal	
7311	-27.9	35.7	0	38.30	46.1	74	-27.9	Horizontal	
9748	-25	37.3	0	36.70	49.0	74	-25.0	Horizontal	
12585	-22.8	38.1	0	34.90	50.2	74	-23.8	Horizontal	



Report No.: SZEM151000661901

Page: 80 of 98

Test mode:	Test mode: 802.11g		Test cha	ınnel:	Highest	Remark:		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3660	-31.2	32.6	0	39.90	41.3	74	-32.7	Vertical	
4924	-30.3	34.6	0	39.10	43.4	74	-30.6	Vertical	
6090	-29.1	35	0	38.40	44.3	74	-29.7	Vertical	
7386	-27.9	35.7	0	37.60	45.4	74	-28.6	Vertical	
9848	-24.2	37.3	0	35.30	48.4	74	-25.6	Vertical	
12885	-24.2	38.2	0	33.90	47.9	74	-26.1	Vertical	
3960	-31	33.1	0	40.20	42.3	74	-31.7	Horizontal	
4924	-30.3	34.6	0	40.40	44.7	74	-29.3	Horizontal	
6150	-29.4	35	0	39.60	45.2	74	-28.8	Horizontal	
7386	-27.9	35.7	0	38.10	45.9	74	-28.1	Horizontal	
9848	-24.2	37.3	0	36.40	49.5	74	-24.5	Horizontal	
12615	-22.9	38.1	0	34.50	49.7	74	-24.3	Horizontal	

Test mode:		802.	11n(HT20)	Test cha	nnel:	Low	est	Remark:		Pe	eak
Frequency (MHz)	Cab Los (dE	SS	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	1	Level dBuV/m)	Limit Line (dBuV/m)	Ove Lim (dB	it	Polarization
3765	-31	.1	32.9	0	46.40		48.2	74	-25.	8	Vertical
4824	-30	.4	34.4	0	39.80		43.8	74	-30.	2	Vertical
6000	-28	.8	34.9	0	40.50		46.6	74	-27.	4	Vertical
7236	-27	.9	35.8	0	37.60		45.5	74	-28.	5	Vertical
9648	-25	5	37.2	0	35.00		47.2	74	-26.	8	Vertical
12510	-23	3	38	0	34.70		49.7	74	-24.	З	Vertical
3825	-31	.2	33.2	0	40.30		42.3	74	-31.	7	Horizontal
4824	-30	.4	34.4	0	40.10		44.1	74	-29.	9	Horizontal
6285	-28	.9	34.8	0	39.80		45.7	74	-28.	3	Horizontal
7236	-27	.9	35.8	0	37.60		45.5	74	-28.	5	Horizontal
9648	-2	5	37.2	0	35.40		47.6	74	-26.	4	Horizontal
12075	-23	.1	37.8	0	34.60		49.3	74	-24.	7	Horizontal



Report No.: SZEM151000661901

Page: 81 of 98

Test mode:		802.	11n(HT20)	Test cha	ınnel:	Mi	iddle	Remark:		Pe	eak
Frequency (MHz)	Cal Lo: (df	SS	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	)	Level (dBuV/m)	Limit Line (dBuV/m)	Ove Lim (dB	it	Polarization
3765	-31	.1	32.9	0	48.40		50.2	74	-23.	8	Vertical
4874	-30	).4	34.5	0	40.10		44.2	74	-29.	8	Vertical
6000	-28	8.8	34.9	0	40.90		47.0	74	-27.	0	Vertical
7311	-27	<b>'</b> .9	35.7	0	37.90		45.7	74	-28.	3	Vertical
9748	-2	5	37.3	0	36.30		48.6	74	-25.	4	Vertical
12630	-2	3	38.1	0	34.80		49.9	74	-24.	1	Vertical
3825	-31	.2	33.2	0	40.30		42.3	74	-31.	7	Horizontal
4874	-30	).4	34.5	0	39.90		44.0	74	-30.	0	Horizontal
6000	-28	8.8	34.9	0	39.30		45.4	74	-28.	6	Horizontal
7311	-27	'.9	35.7	0	37.30		45.1	74	-28.	9	Horizontal
9748	-2	5	37.3	0	35.50		47.8	74	-26.	2	Horizontal
12645	-23	3.1	38.1	0	35.20		50.2	74	-23.	8	Horizontal

Test mode:	802	.11n(HT20)	Test cha	innel:	Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3750	-31.1	32.9	0	44.70	46.5	74	-27.5	Vertical
4924	-30.3	34.6	0	39.90	44.2	74	-29.8	Vertical
6090	-29.1	35	0	39.10	45.0	74	-29.0	Vertical
7386	-27.9	35.7	0	38.50	46.3	74	-27.7	Vertical
9848	-24.2	37.3	0	35.30	48.4	74	-25.6	Vertical
12705	-23.5	38.1	0	35.20	49.8	74	-24.2	Vertical
3712.968	-31.1	32.7	0	39.60	41.2	74	-32.8	Horizontal
4924	-30.3	34.6	0	40.20	44.5	74	-29.5	Horizontal
6000	-28.8	34.9	0	40.00	46.1	74	-27.9	Horizontal
7386	-27.9	35.7	0	37.90	45.7	74	-28.3	Horizontal
9848	-24.2	37.3	0	36.40	49.5	74	-24.5	Horizontal
12240	-22.7	37.9	0	33.90	49.1	74	-24.9	Horizontal



Report No.: SZEM151000661901

Page: 82 of 98

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurements were shown in the report.






Report No.: SZEM151000661901

Page: 83 of 98

### 6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 1	5.209 and 15.205							
Test Method:	ANSI C63.10: 2013	NSI C63.10: 2013							
Test Site:	Measurement Distance: 3m	feasurement Distance: 3m (Semi-Anechoic Chamber)							
Limit:	Frequency	Limit (dBuV/m @3m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1GHz	54.0	Average Value						
	Above IGHZ	74.0	Peak Value						
Test Setup:									

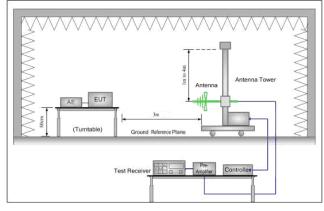

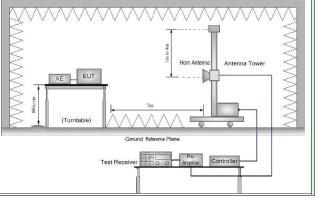


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM151000661901

Page: 84 of 98


Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	g. Test the EUT in the lowest channel, the Highest channel
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
	Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode
	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM151000661901

Page: 85 of 98

#### Test plot as follows:

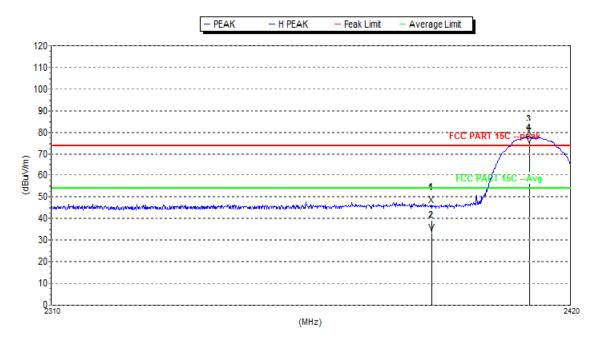


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	46.1	74.0	27.9	32.5	0.0	-19.3	Н
2 F	2410.980	78.0	74.0	-4.0	32.6	0.0	-19.3	Н
Avg								
1	2390	33.3	54.0	20.7	32.5	0.0	-19.3	Н
2 F	2410.980	73.9	54.0	-19.9	32.6	0.0	-19.3	Н



Report No.: SZEM151000661901

Page: 86 of 98

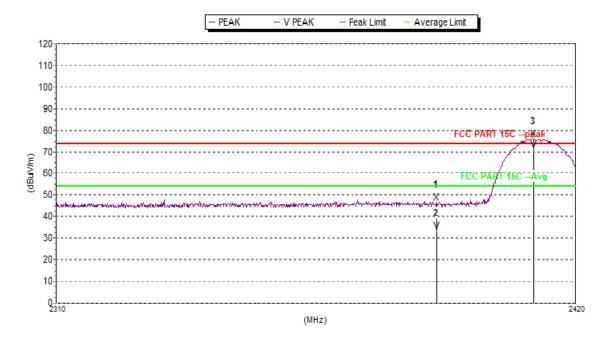


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	46.7	74.0	27.3	32.5	0.0	-19.3	V
2 F	2410.870	76.0	74.0	-2.0	32.6	0.0	-19.3	V
Avg								
1	2390	33.2	54.0	20.8	32.5	0.0	-19.3	V
2 F	2410.870	71.1	54.0	-17.1	32.6	0.0	-19.3	V



Report No.: SZEM151000661901

Page: 87 of 98

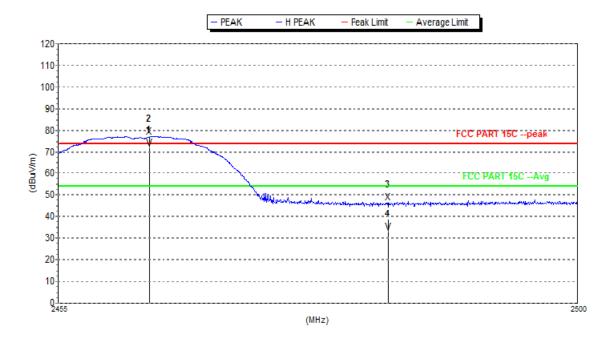


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1 F	2462.875	77.0	74.0	-3.0	32.5	0.0	-19.2	Н
2	2483.5	46.6	74.0	27.4	32.5	0.0	-19.1	Н
Avg								
1 F	2462.875	71.8	54.0	-17.8	32.5	0.0	-19.2	Н
2	2483.5	33.0	54.0	21.0	32.5	0.0	-19.1	Н



Report No.: SZEM151000661901

Page: 88 of 98

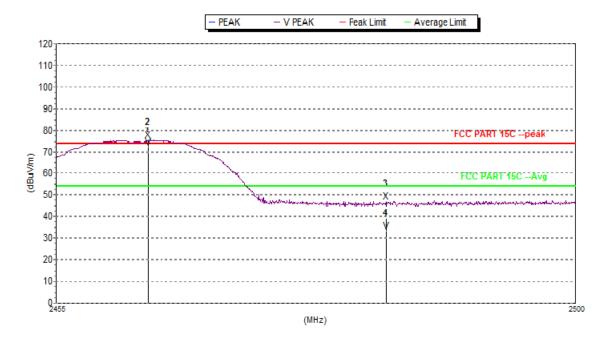


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1 F	2462.920	75.3	74.0	-1.3	32.5	0.0	-19.2	V
2	2483.5	46.9	74.0	27.1	32.5	0.0	-19.1	V
Avg								
1 F	2462.920	72.1	54.0	-18.1	32.5	0.0	-19.2	V
2	2483.5	33.2	54.0	20.8	32.5	0.0	-19.1	V



Report No.: SZEM151000661901

Page: 89 of 98

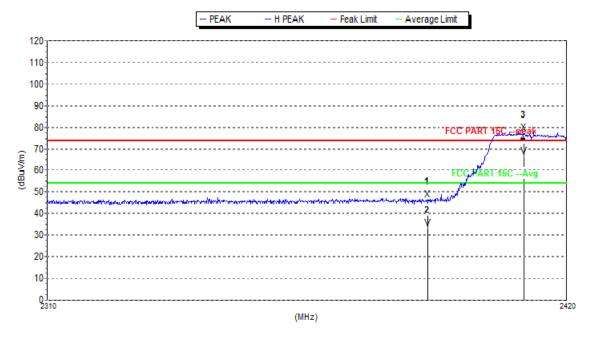


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	46.6	74.0	27.4	32.5	0.0	-19.3	Н
2 F	2410.650	77.3	74.0	-3.3	32.6	0.0	-19.3	Н
Avg								
1	2390	33.3	54.0	20.7	32.5	0.0	-19.3	Н
2 F	2410.650	66.7	54.0	-12.7	32.6	0.0	-19.3	Н



Report No.: SZEM151000661901

Page: 90 of 98

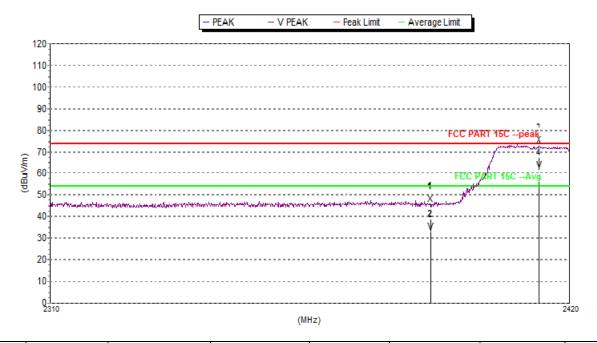


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	45.6	74.0	28.4	32.5	0.0	-19.3	V
2	2413.400	72.9	74.0	1.1	32.6	0.0	-19.3	V
Avg								
1	2390	32.8	54.0	21.2	32.5	0.0	-19.3	V
2 F	2413.400	61.4	54.0	-7.4	32.6	0.0	-19.3	V



Report No.: SZEM151000661901

Page: 91 of 98

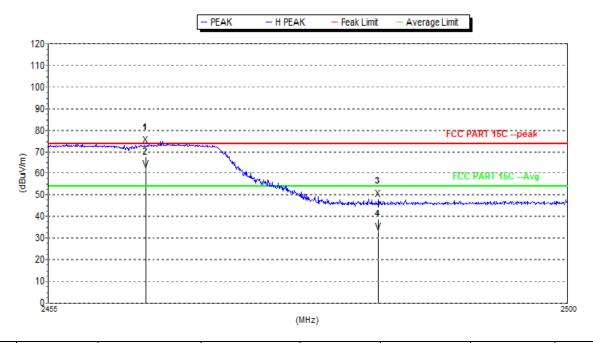


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2463.370	73.2	74.0	0.8	32.5	0.0	-19.2	Н
2	2483.5	48.3	74.0	25.7	32.5	0.0	-19.1	Н
Avg								
1 F	2463.370	61.7	54.0	-7.7	32.5	0.0	-19.2	Н
2	2483.5	33.0	54.0	21.0	32.5	0.0	-19.1	Н



Report No.: SZEM151000661901

Page: 92 of 98

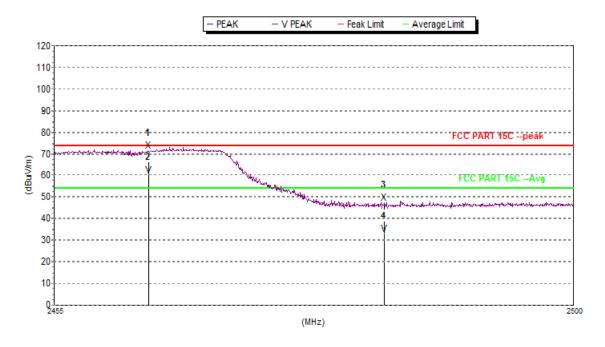


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2463.100	71.3	74.0	2.7	32.5	0.0	-19.2	V
2	2483.5	47.5	74.0	26.5	32.5	0.0	-19.1	V
Avg								
1 F	2463.100	60.2	54.0	-6.2	32.5	0.0	-19.2	V
2	2483.5	33.1	54.0	20.9	32.5	0.0	-19.1	V





Report No.: SZEM151000661901

Page: 93 of 98

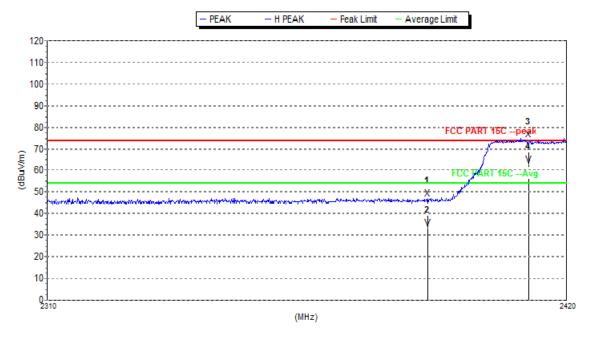


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	47.1	74.0	26.9	32.5	0.0	-19.3	Н
2 F	2411.750	74.1	74.0	-0.1	32.6	0.0	-19.3	Н
Avg								
1	2390	33.2	54.0	20.8	32.5	0.0	-19.3	Н
2 F	2411.750	62.5	54.0	-8.5	32.6	0.0	-19.3	Н



Report No.: SZEM151000661901

Page: 94 of 98

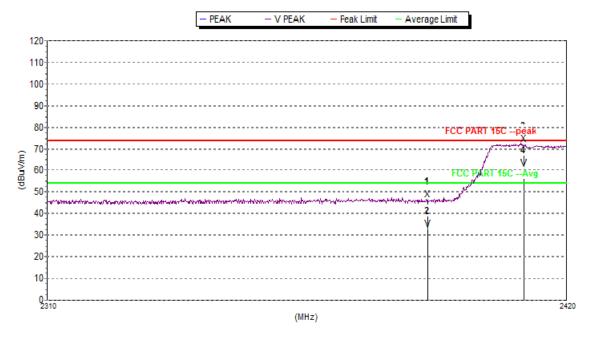


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	46.4	74.0	27.6	32.5	0.0	-19.3	V
2	2410.760	72.1	74.0	1.9	32.6	0.0	-19.3	V
Avg								
1	2390	32.9	54.0	21.1	32.5	0.0	-19.3	V
2 F	2410.760	61.0	54.0	-7.0	32.6	0.0	-19.3	V



Report No.: SZEM151000661901

Page: 95 of 98

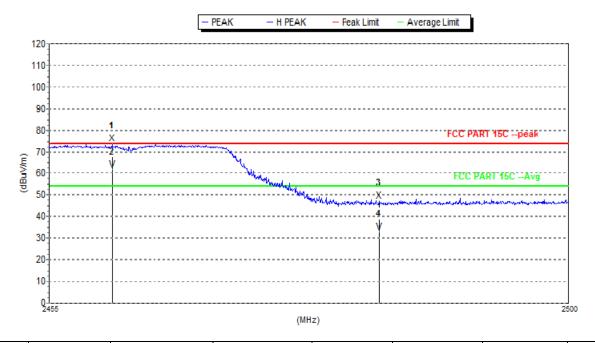


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2460.445	73.7	74.0	0.3	32.5	0.0	-19.2	Н
2	2483.5	47.2	74.0	26.8	32.5	0.0	-19.1	Н
Avg								
1 F	2460.445	61.9	54.0	-7.9	32.5	0.0	-19.2	Н
2	2483.5	33.1	54.0	20.9	32.5	0.0	-19.1	Н



Report No.: SZEM151000661901

Page: 96 of 98

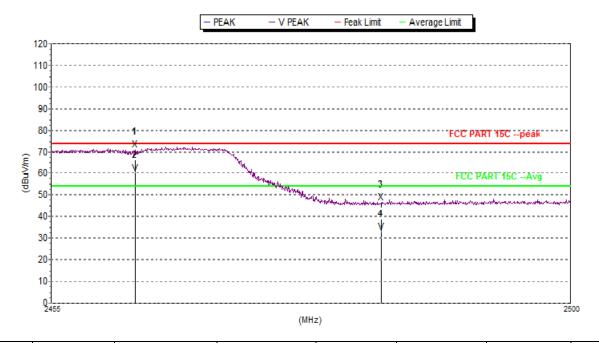

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2462.245	71.0	74.0	3.0	32.5	0.0	-19.2	V
2	2483.5	46.5	74.0	27.5	32.5	0.0	-19.1	V
Avg								
1 F	2462.245	60.0	54.0	-6.0	32.5	0.0	-19.2	V
2	2483.5	33.1	54.0	20.9	32.5	0.0	-19.1	V

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM151000661901

Page: 97 of 98


### 7 Photographs - EUT Test Setup

Test model No.: Wio Link

### 7.1 Conducted Emission



### 7.2 Radiated Emission

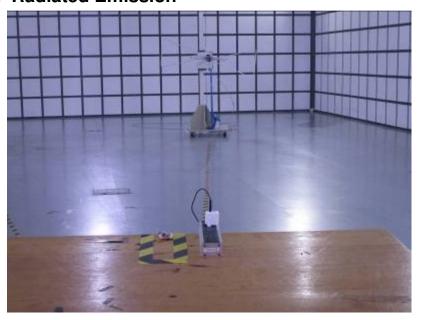




Report No.: SZEM151000661901

Page: 98 of 98

### 7.3 Radiated Spurious Emission Test Setup

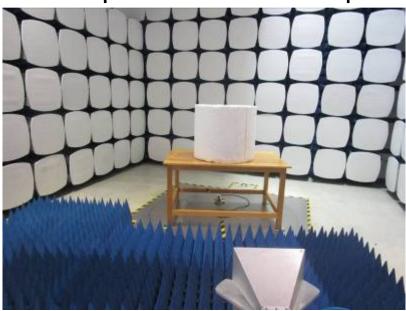



### 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1510006619CR.