




Radiated Emission Measurement

File :NAS-WR02W

Data :#9

Date: 2018-4-16

100.0 dBuV/m

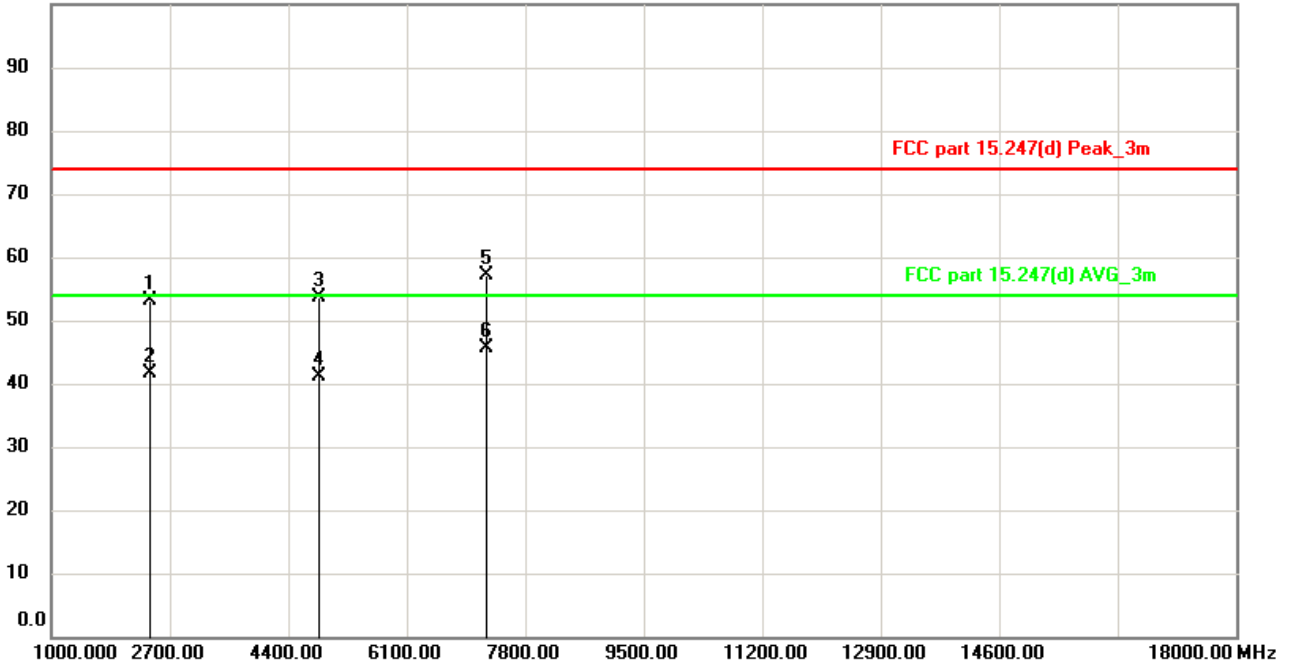

Site Polarization: **Vertical** Temperature: 24
 Limit: FCC part 15.247(d) Peak_3m Power: AC120V/60Hz Humidity: 47 %
 EUT: Smart Device Distance:
 M/N: NAS-WR06W
 Mode: TX
 Note: 802.11n Low

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2399.000	53.12	0.13	53.25	74.00	-20.75			peak
2		2399.000	41.46	0.13	41.59	54.00	-12.41			AVG
3		4824.000	47.35	6.38	53.73	74.00	-20.27			peak
4		4824.000	34.70	6.38	41.08	54.00	-12.92			AVG
5		7236.000	46.73	10.48	57.21	74.00	-16.79			peak
6	*	7236.000	35.09	10.48	45.57	54.00	-8.43			AVG

*:Maximum data x:Over limit !:over margin

<Reference Only




Radiated Emission Measurement

File :NAS-WR02W

Data :#10

Date: 2018-4-16

100.0 dBuV/m

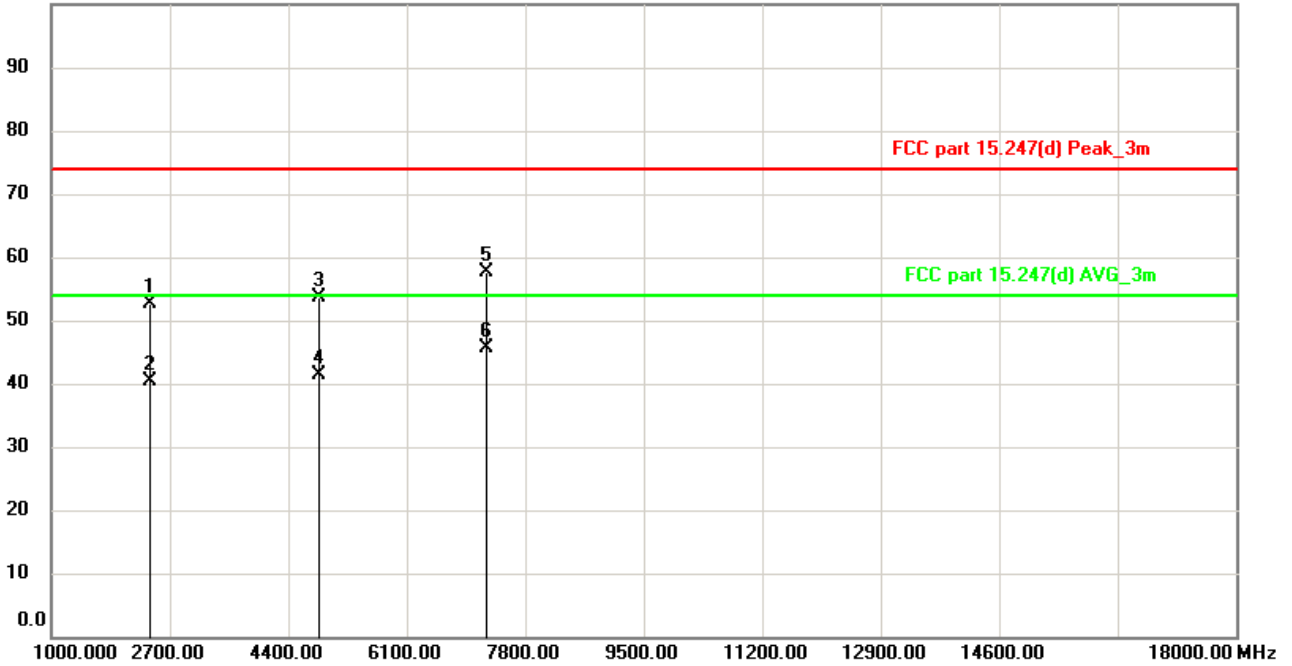

Site: Polarization: **Horizontal** Temperature: 24
 Limit: FCC part 15.247(d) Peak_3m Power: AC120V/60Hz Humidity: 47 %
 EUT: Smart Device Distance:
 M/N: NAS-WR06W
 Mode: TX
 Note: 802.11n Low

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2399.000	52.50	0.13	52.63	74.00	-21.37	peak			
2		2399.000	40.14	0.13	40.27	54.00	-13.73	AVG			
3		4824.000	47.34	6.38	53.72	74.00	-20.28	peak			
4		4824.000	35.00	6.38	41.38	54.00	-12.62	AVG			
5		7236.000	47.21	10.48	57.69	74.00	-16.31	peak			
6	*	7236.000	35.23	10.48	45.71	54.00	-8.29	AVG			

*:Maximum data x:Over limit !:over margin

<Reference Only




Radiated Emission Measurement

File :NAS-WR02W

Data :#11

Date: 2018-4-16

100.0 dBuV/m

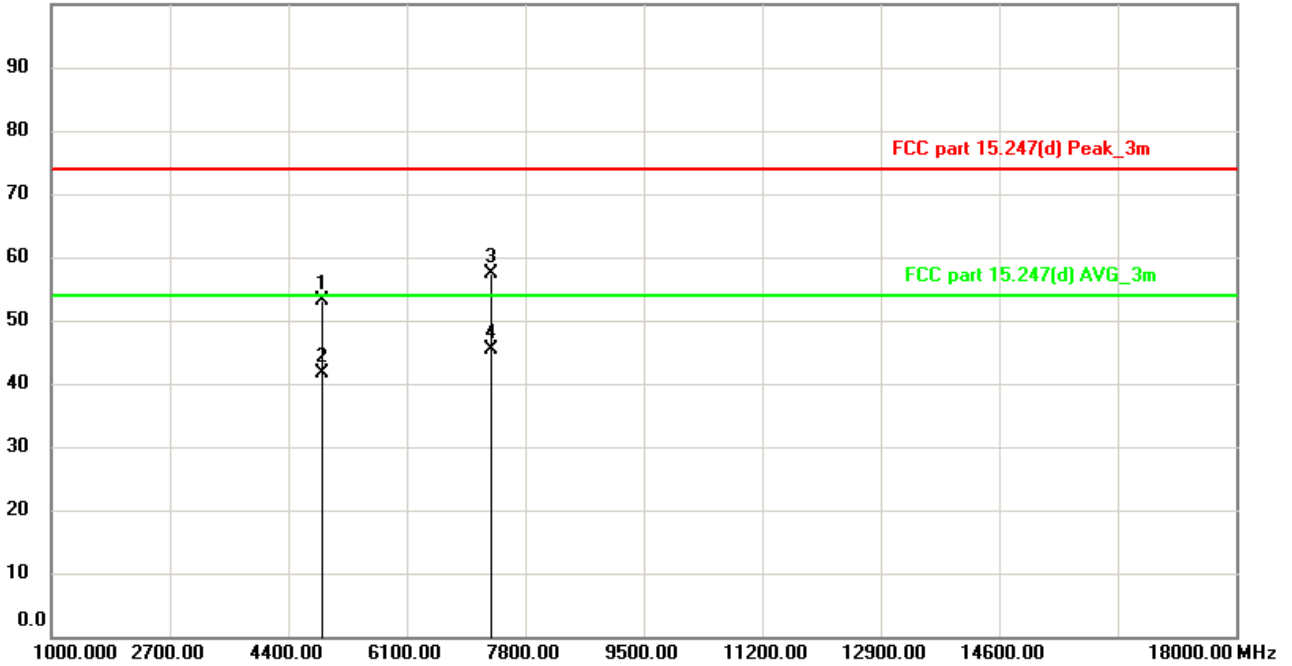

Site Polarization: **Horizontal** Temperature: 24
 Limit: FCC part 15.247(d) Peak_3m Power: AC120V/60Hz Humidity: 47 %
 EUT: Smart Device Distance:
 M/N: NAS-WR06W
 Mode: TX
 Note: 802.11n Mid

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		4874.000	46.69	6.56	53.25	74.00	-20.75	peak			
2		4874.000	34.96	6.56	41.52	54.00	-12.48	AVG			
3		7311.000	46.83	10.53	57.36	74.00	-16.64	peak			
4	*	7311.000	34.96	10.53	45.49	54.00	-8.51	AVG			

*:Maximum data x:Over limit !:over margin

<Reference Only




Radiated Emission Measurement

File :NAS-WR02W

Data :#12

Date: 2018-4-16

100.0 dBuV/m

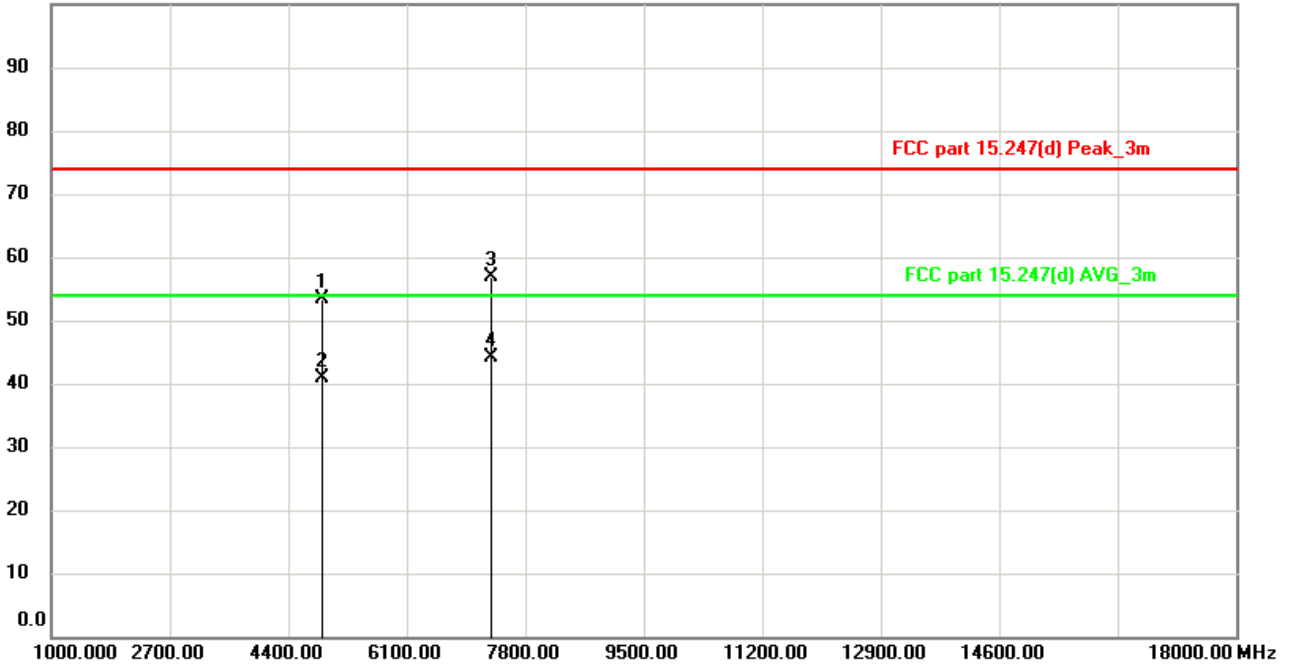

Site Polarization: **Vertical** Temperature: 24
 Limit: FCC part 15.247(d) Peak_3m Power: AC120V/60Hz Humidity: 47 %
 EUT: Smart Device Distance:
 M/N: NAS-WR06W
 Mode: TX
 Note: 802.11n Mid

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		4874.000	46.71	6.56	53.27	74.00	-20.73			peak
2		4874.000	34.33	6.56	40.89	54.00	-13.11			AVG
3		7311.000	46.30	10.53	56.83	74.00	-17.17			peak
4	*	7311.000	33.68	10.53	44.21	54.00	-9.79			AVG

*:Maximum data x:Over limit !:over margin

<Reference Only




Radiated Emission Measurement

File :NAS-WR02W

Data :#13

Date: 2018-4-16

100.0 dBuV/m

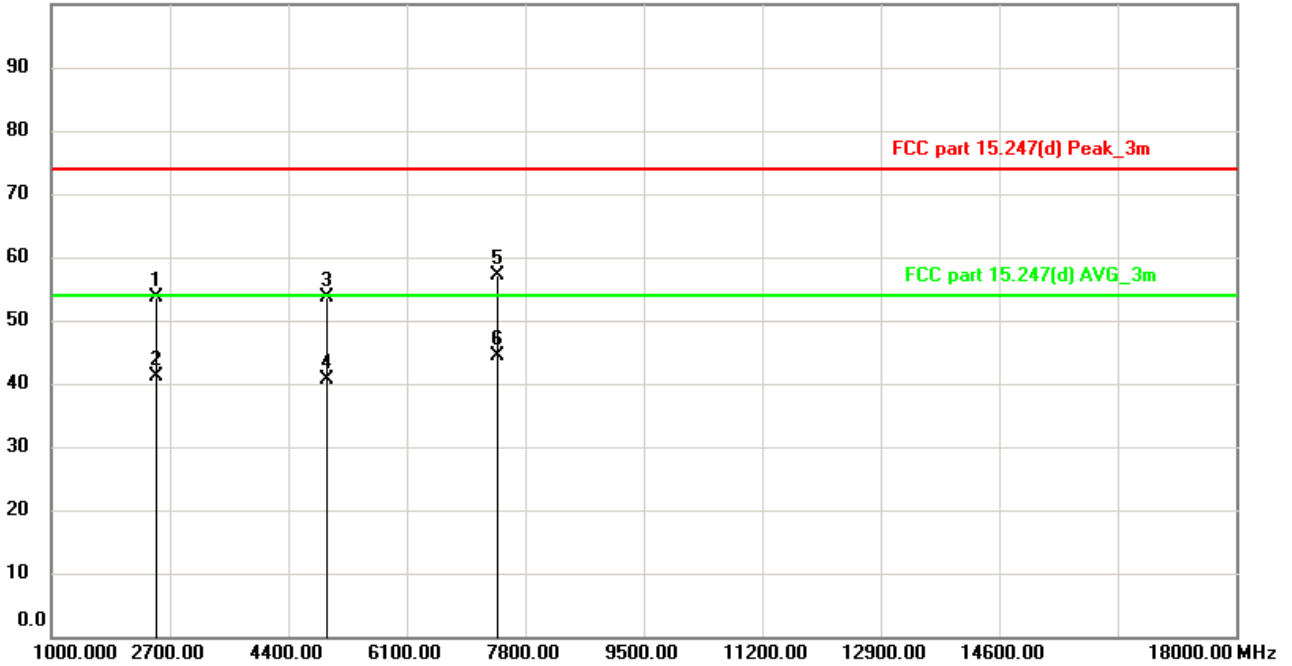

Site: Polarization: **Vertical** Temperature: 24
 Limit: FCC part 15.247(d) Peak_3m Power: AC120V/60Hz Humidity: 47 %
 EUT: Smart Device Distance:
 M/N: NAS-WR06W
 Mode: TX
 Note: 802.11n High

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	53.33	0.34	53.67	74.00	-20.33			peak
2		2483.500	40.79	0.34	41.13	54.00	-12.87			AVG
3		4924.000	46.93	6.76	53.69	74.00	-20.31			peak
4		4924.000	33.81	6.76	40.57	54.00	-13.43			AVG
5		7386.000	46.68	10.57	57.25	74.00	-16.75			peak
6	*	7386.000	33.82	10.57	44.39	54.00	-9.61			AVG

*:Maximum data x:Over limit !:over margin

<Reference Only




Radiated Emission Measurement

File :NAS-WR02W

Data :#14

Date: 2018-4-16

100.0 dBuV/m

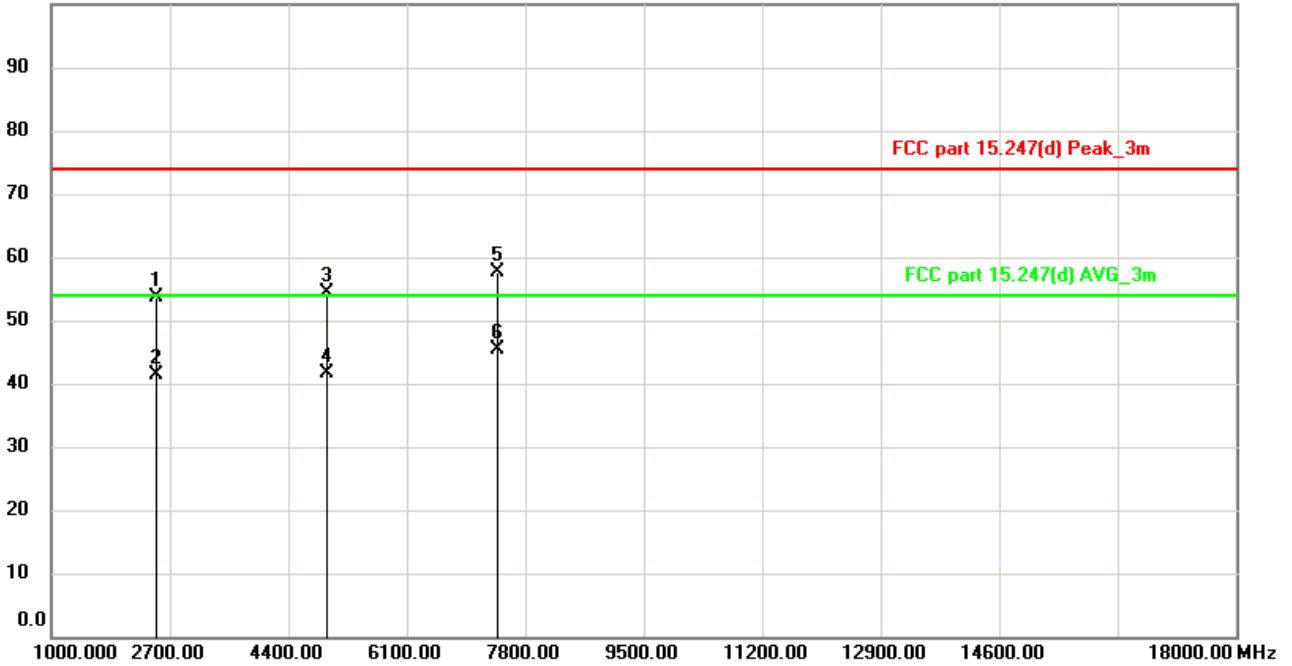

Site Polarization: **Horizontal** Temperature: 24
 Limit: FCC part 15.247(d) Peak_3m Power: AC120V/60Hz Humidity: 47 %
 EUT: Smart Device Distance:
 M/N: NAS-WR06W
 Mode: TX
 Note: 802.11n High

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2483.500	53.39	0.34	53.73	74.00	-20.27	peak			
2		2483.500	40.93	0.34	41.27	54.00	-12.73	AVG			
3		4924.000	47.52	6.76	54.28	74.00	-19.72	peak			
4		4924.000	34.78	6.76	41.54	54.00	-12.46	AVG			
5		7386.000	47.09	10.57	57.66	74.00	-16.34	peak			
6	*	7386.000	34.75	10.57	45.32	54.00	-8.68	AVG			

*:Maximum data x:Over limit !:over margin

<Reference Only