



**FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4:2003  
TEST REPORT**

**For**

**802.11 b/g WiFi Module Board**

**Model : AXM22001-2A-C**

**Trade Name : ASIX**

**Issued for**

**ASIX Electronics Corporation**

**4F, No. 8 Hsin Ann Rd., Hsinchu Science Park,  
Hsinchu, Taiwan, R.O.C.**

**Issued by**

**Compliance Certification Services Inc.**

**Hsinchu Lab.**

**NO. 989-1 Wen Shan Rd., Shang Shan Village,  
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C**

**TEL: +886-3-5921698**

**FAX: +886-3-5921108**

**<http://www.ccsrf.com>**

**E-Mail : [service@ccsrf.com](mailto:service@ccsrf.com)**

**Issued Date: November 02, 2011**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.



## Revision History

<b>Rev.</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Effect Page</b>	<b>Revised By</b>
00	10/24/2011	Initial Issue	All Page 66	Cindy Pon
01	11/02/2011	Revised	Page 1, 3, 4, 6, 62, 63, 69 All Page 69	Cindy Pon

**TABLE OF CONTENTS**

<b>TITLE</b>	<b>PAGE NO.</b>
<b>1. TEST REPORT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. DESCRIPTION OF TEST MODES .....</b>	<b>6</b>
<b>4. TEST METHODOLOGY .....</b>	<b>6</b>
<b>5. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
5.1 FACILITIES .....	7
5.2 ACCREDITATIONS.....	7
5.3 MEASUREMENT UNCERTAINTY .....	8
<b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>9-11</b>
<b>7. FCC PART 15.247 REQUIREMENTS .....</b>	<b>12</b>
7.1 6dB BANDWIDTH .....	12-17
7.2 MAXIMUM PEAK OUTPUT POWER .....	18-23
7.3 AVERAGE POWER .....	24-25
7.4 POWER SPECTRAL DENSITY .....	26-31
7.5 CONDUCTED SPURIOUS EMISSION .....	32-38
7.6 RADIATED EMISSION.....	39-58
7.7 CONDUCTED EMISSION.....	59-63
<b>APPENDIX I MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>64-65</b>
<b>APPENDIX II SETUP PHOTOS .....</b>	<b>66-69</b>



## 1. TEST REPORT CERTIFICATION

**Applicant** : ASIX Electronics Corporation

**Address** : 4F, No. 8 Hsin Ann Rd., Hsinchu Science Park,  
Hsinchu, Taiwan, R.O.C.

**Equipment Under Test** : 802.11 b/g WiFi Module Board

**Model** : AXM22001-2A-C

**Trade Name** : ASIX

**Tested Date** : September 30 ~ October 21 ;  
October 31 ~ November 02, 2011

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.4:2003	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Approved by:**

Sb. Lu  
Sr. Engineer

**Reviewed by:**

Gundam Lin  
Sr. Engineer



## 2. EUT DESCRIPTION

<b>Product Name</b>	802.11 b/g WiFi Module Board
<b>Model Number</b>	AXM22001-2A-C
<b>Identify Number</b>	T111006304
<b>Received Date</b>	September 30, 2011
<b>Frequency Range</b>	IEEE 802.11b/g : 2412MHz ~ 2462MHz
<b>Transmit Power</b>	IEEE 802.11b : 19.04 dBm (0.0802W) IEEE 802.11g : 19.35 dBm (0.0861W)
<b>Channel Spacing</b>	IEEE 802.11b/g : 5MHz
<b>Channel Number</b>	IEEE 802.11b/g : 11 Channels
<b>Transmit Data Rate</b>	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps
<b>Type of Modulation</b>	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK)
<b>Antenna Type</b>	PCB Antenna, Antenna Gain 1.45 dBi
<b>Power Rating</b>	3.3Vdc
<b>Test Voltage</b>	120Vac, 60Hz

**Remark :**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. This submittal(s) (test report) is intended for FCC ID: Z59A22001C filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### 3. DESCRIPTION OF TEST MODES

**Conducted Emission / Radiated Emission Test (Below 1 GHz)**

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test Mode
1	Normal Operating

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode		
Emission	Radiated Emission	Normal Operating
	Conducted Emission	Normal Operating

*Remark : Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.*

**Conducted / Radiated Emission Test (Above 1 GHz)**

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode : 1Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode : 6Mbps data rate (worst case) were chosen for full testing.

### 4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47, 15.207, 15.209 and 15.247.



## 5. FACILITIES AND ACCREDITATION

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

NO. 989-1 Wen Shan Rd., Shang Shan Village,  
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.4:2003 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

### 5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

**Taiwan**      TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>Canada</b>	INDUSTRY CANADA
<b>Japan</b>	VCCI
<b>Taiwan</b>	BSMI
<b>USA</b>	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



## 5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.5189
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 2.5164
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 2.4967
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 2.7655
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 1.5923

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22: 2006, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than  $U_{CISPR}$  which is 3.6dB and 5.2dB respectively. CCS values (called  $U_{Lab}$  in CISPR 16-4-2) is less than  $U_{CISPR}$  as shown in the table above. Therefore, MU need not be considered for compliance.



## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	Notebook PC	HP	ProBook 4421s	CNF03242PJ	DoC
2	Notebook PC	HP	ProBook 4421s	CNF03242PM	DoC
3	Wireless Gigabit Router	D-Link	DI-724GU	-----	-----
4	DC Power Supply	Agilent	E3641A	MY40002337	----

No.	Signal Cable Description
1	Unshielded RS-232 cable, 1.2m x 1
2	Unshielded RJ-45 cable 3m x 1

### SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

### EUT OPERATING CONDITION

#### **RF Mode**

1. Set up whole system for test as shown on diagram.
2. Notebook PC (1) install TERA term free software.
3. Notebook PC (1) connected to EUT with RS-232 cable and run TERA term program.
4. When the EUT ready, Key-in the command.
5. Command :

TX B mode (CCK 1Mbps)

a. Ch1

radw 1

chw 1

drw 02

apcw 1

netw 2

ct 1



b. Ch 6

radw 1

chw 6

drw 02

apcw 1

netw 2

ct 1

c. Ch 11

radw 1

chw 11

drw 02

apcw 1

netw 2

ct 1

TX G mode (OFDM 6Mbps)

a. Ch1

radw 1

chw 1

drw 0c

apcw 1

netw 2

ct 2

b. Ch 6

radw 1

chw 6

drw 0c

apcw 1

netw 2

ct 2



c. Ch 11

radw 1

chw 11

drw 0c

apcw 1

netw 2

ct 2

7. All of the functions are under run.

8. Start test.

## Normal Mode

1. Set up whole system for test as shown on diagram.
2. Notebook PC (1) install TERA term free software
3. Notebook PC (1) connected to EUT with RS-232 cable and run TERA term program
4. When the EUT ready, Key-in the command
5. Command :  
radw 1  
apcw 1  
netw 3
6. Wireless Router (Set IP Address = 192.168.2.XXX) connected to Notebook PC (2) with RJ-45 (IP address = DHCP)
7. Notebook PC (1) key-in command  
Sisrvy (search Wireless Router Signal)  
Jbss XX (XX = Wireless Router No.)
8. When the EUT connected to Wireless Router, EUT and Notebook PC (2) ping IP Address each other
9. All of the functions are under run.
10. Start test.



## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6dB BANDWIDTH

#### LIMITS


§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

#### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	AGILENT	E4446A	MY46180323	04/24/2012

*Remark:* Each piece of equipment is scheduled for calibration once a year.

#### TEST SETUP

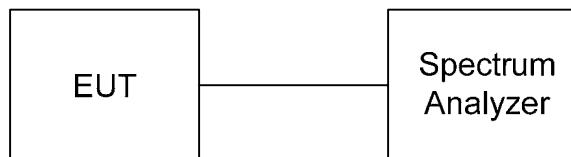

#### TEST PROCEDURE


The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


**TEST RESULTS****IEEE 802.11b Mode**


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	9.92	500	PASS
Middle	2437	9.83	500	PASS
High	2462	9.17	500	PASS


**IEEE 802.11g Mode**

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16.42	500	PASS
Middle	2437	16.50	500	PASS
High	2462	16.50	500	PASS

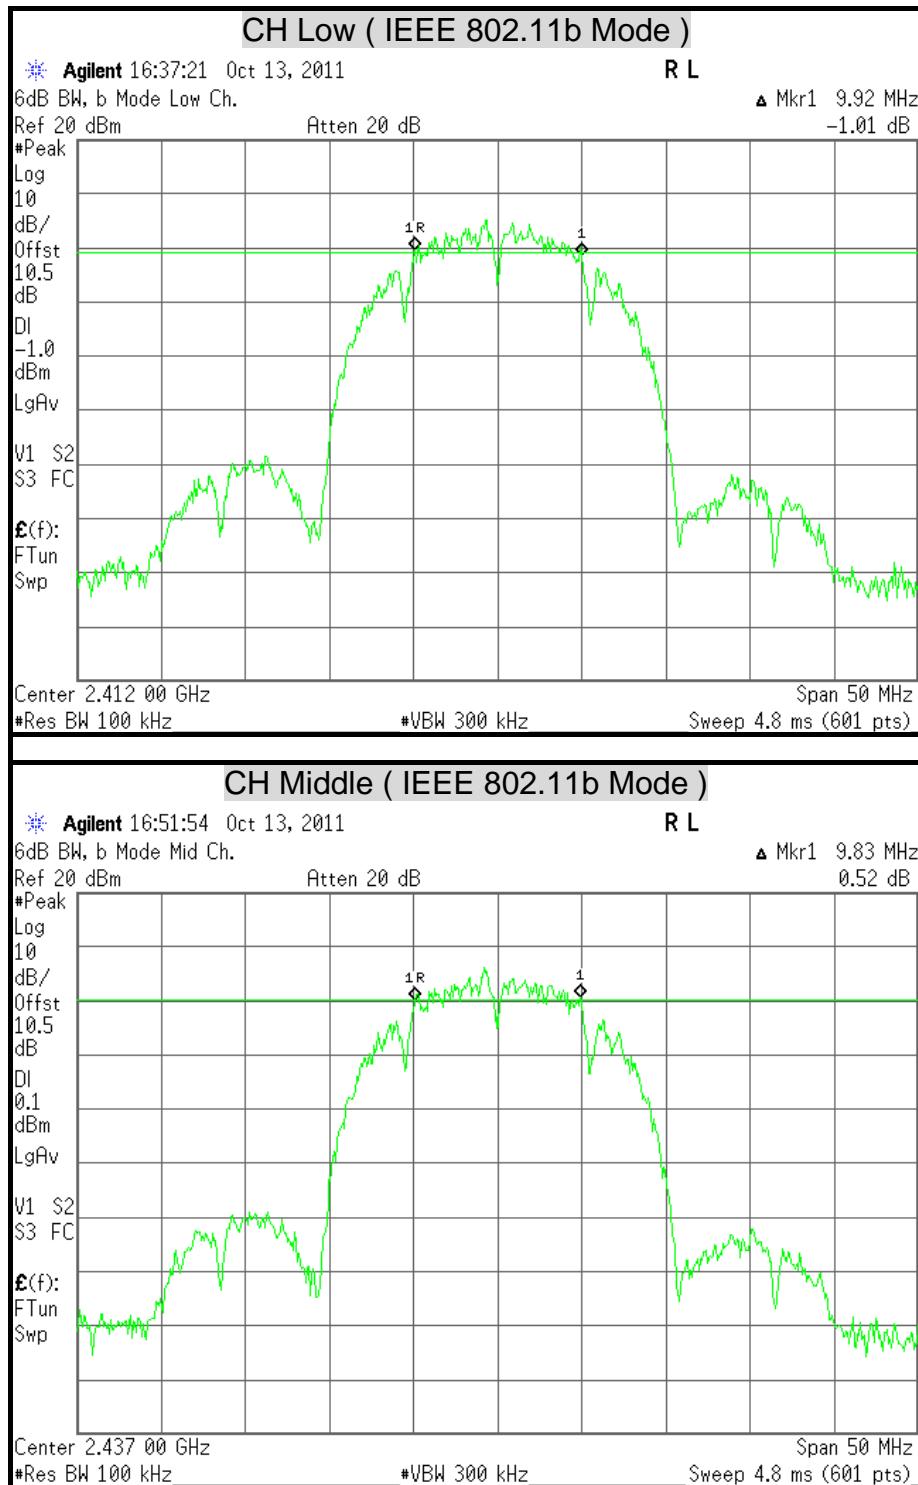**6dB BANDWIDTH**

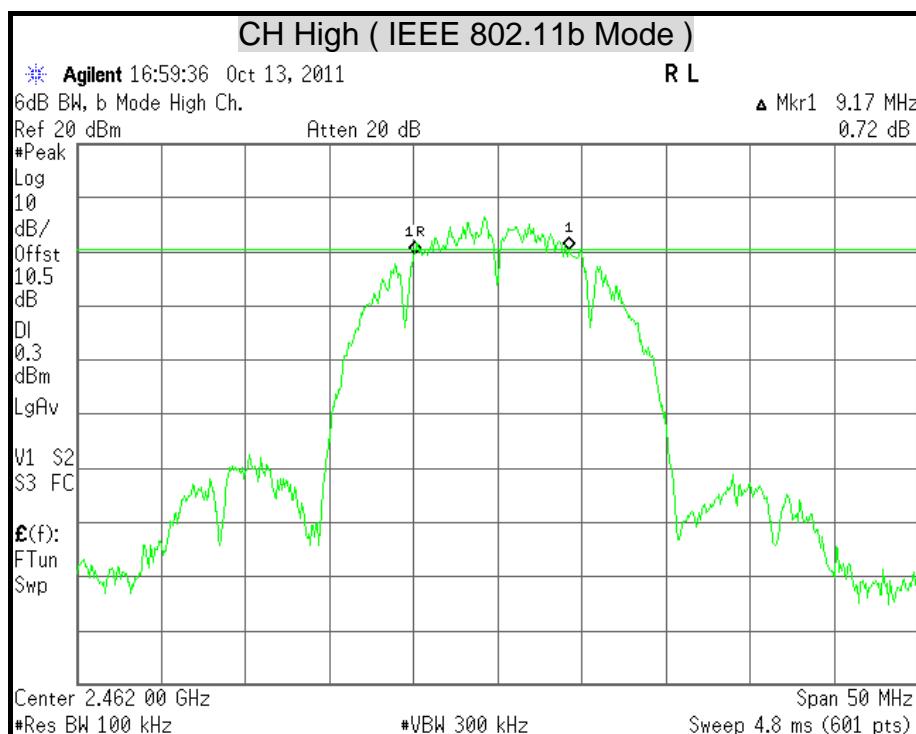

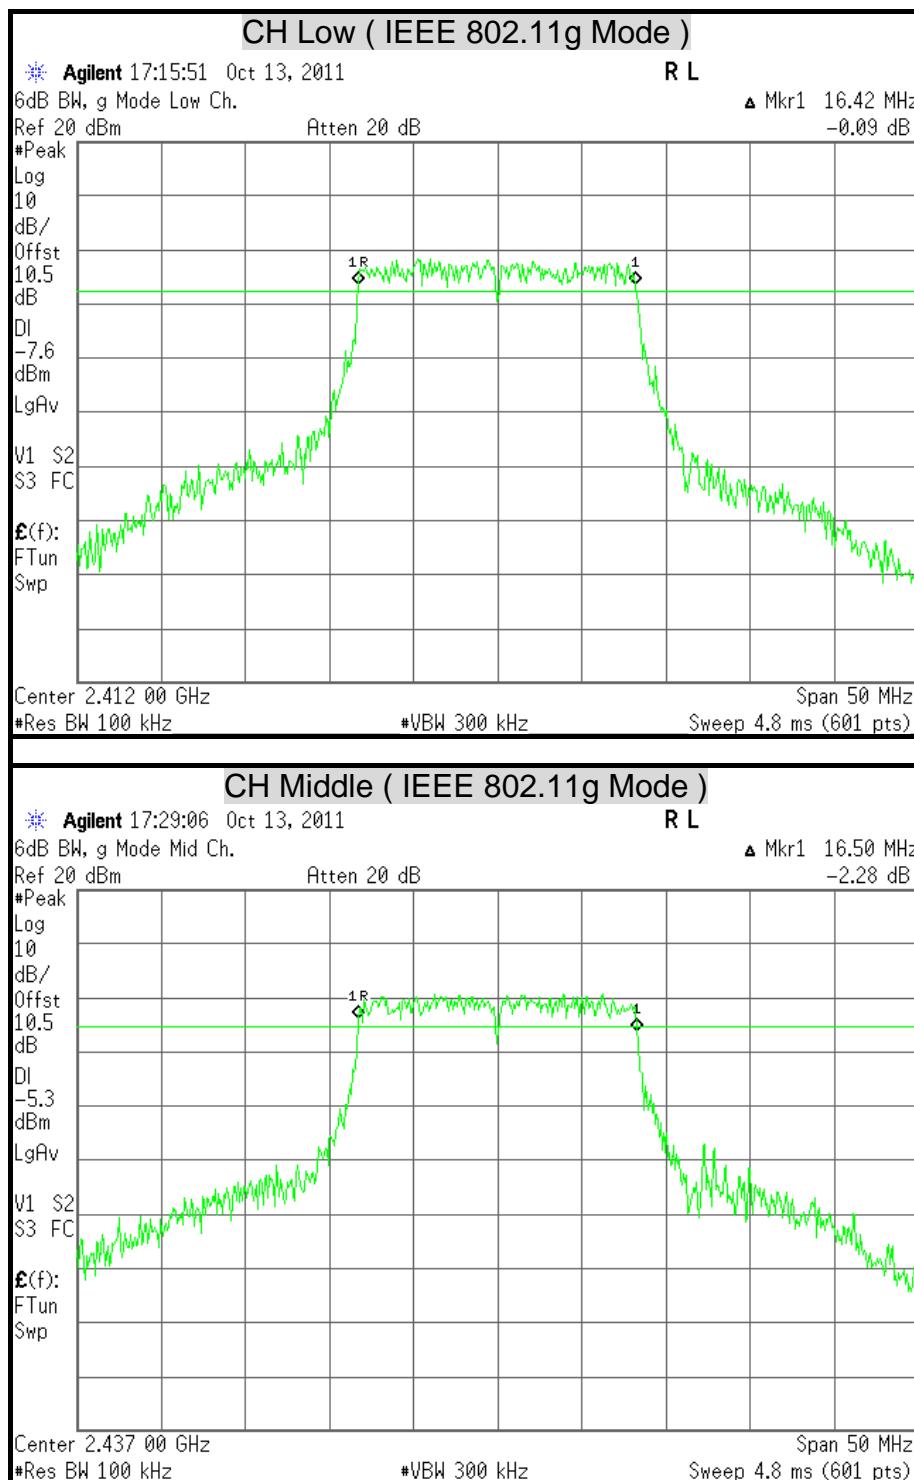

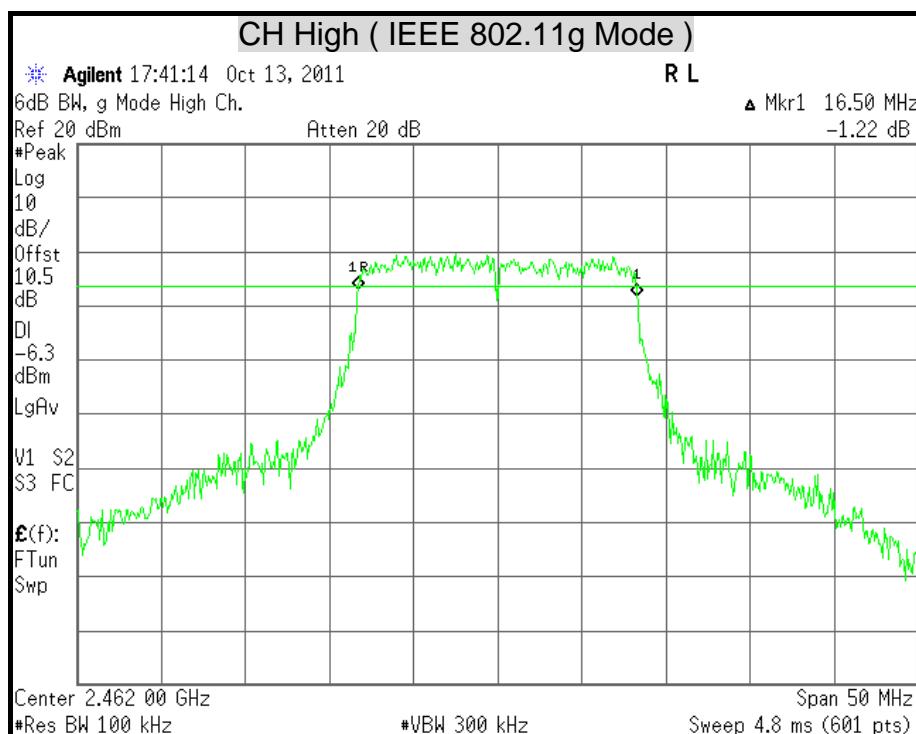



## 7.2 MAXIMUM PEAK OUTPUT POWER

### LIMITS

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.


§ 15.247(b) (4) Except as shown in paragraphs (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	AGILENT	E4446A	MY46180323	04/24/2012

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### TEST SETUP

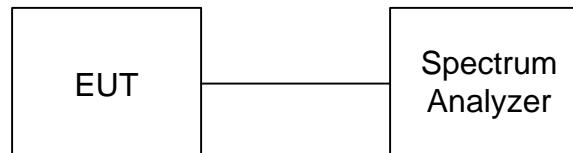

### TEST PROCEDURE

1. The spectrum shall be set as follows :

Span : 1.5 times channel integration bandwidth.

RBW : 1MHz

VBW : 3MHz

Detector : Peak

Sweep : Single trace

2. Compute the combined power of all signal responses contained in the trace by covering all the data points.

3. The peak output power is the channel power integrated over 26dB bandwidth.

**TEST RESULTS****IEEE 802.11b Mode**

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2412	18.32	0.0679	30	1	PASS
Middle	2437	18.73	0.0746	30	1	PASS
High	2462	19.04	0.0802	30	1	PASS

**Remark:**

1. The cable assembly insertion loss of 11.5dB (including 10dB pad + 1.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power density.
2. PSD = Reading + Antenna Gain + 10 \* log (1/x)

**IEEE 802.11g Mode**


Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2412	16.77	0.0475	30	1	PASS
Middle	2437	19.35	0.0861	30	1	PASS
High	2462	17.52	0.0565	30	1	PASS


**Remark:**


1. The cable assembly insertion loss of 11.5dB (including 10dB pad + 1.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power density.
2. PSD = Reading + Antenna Gain + 10 \* log (1/x)




## MAXIMUM PEAK OUTPUT POWER

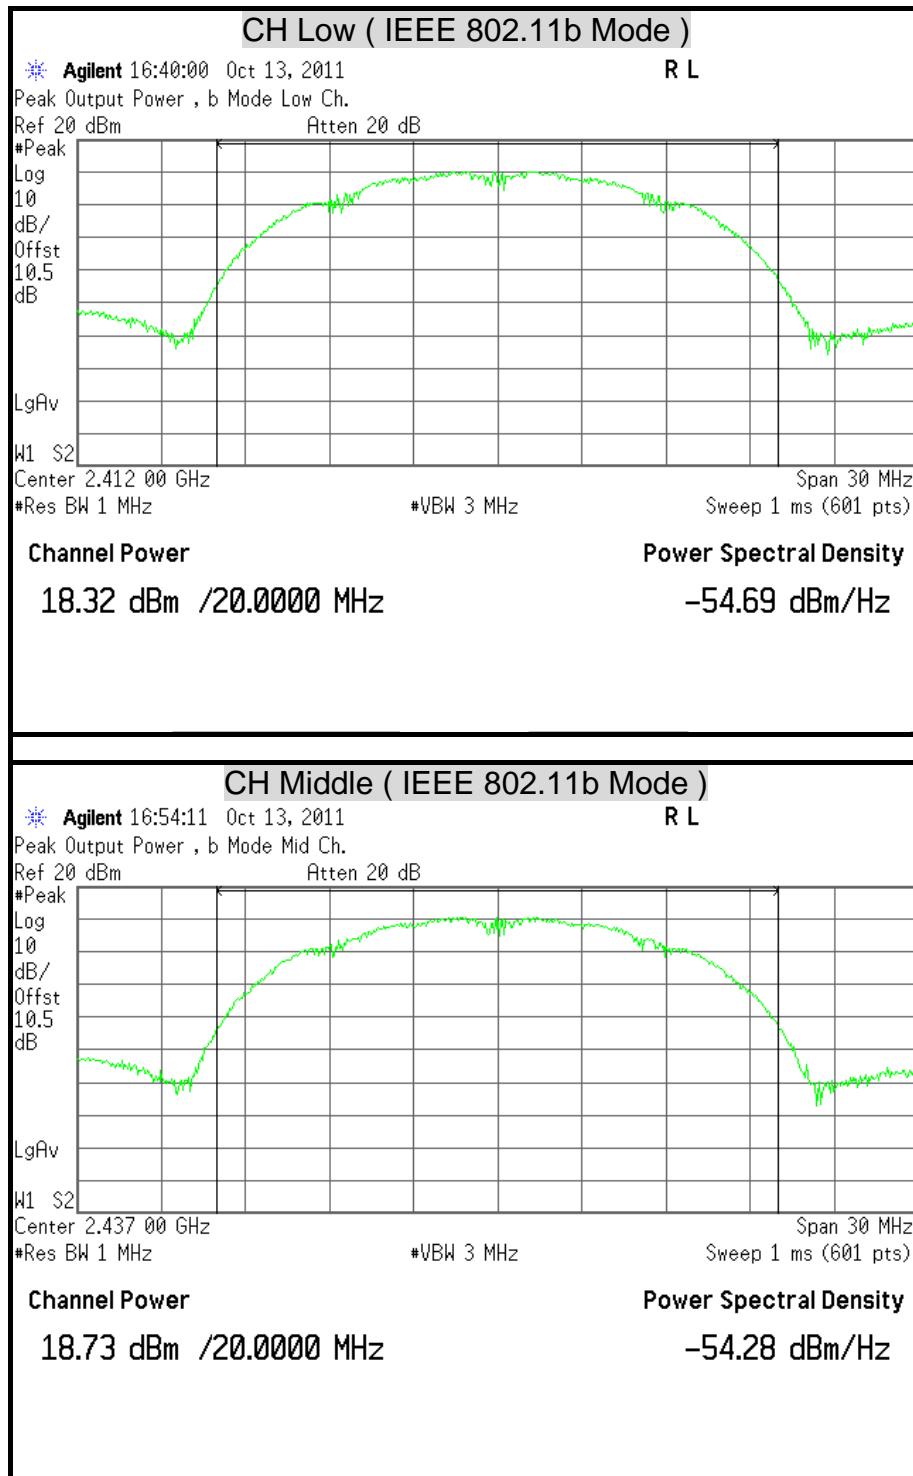

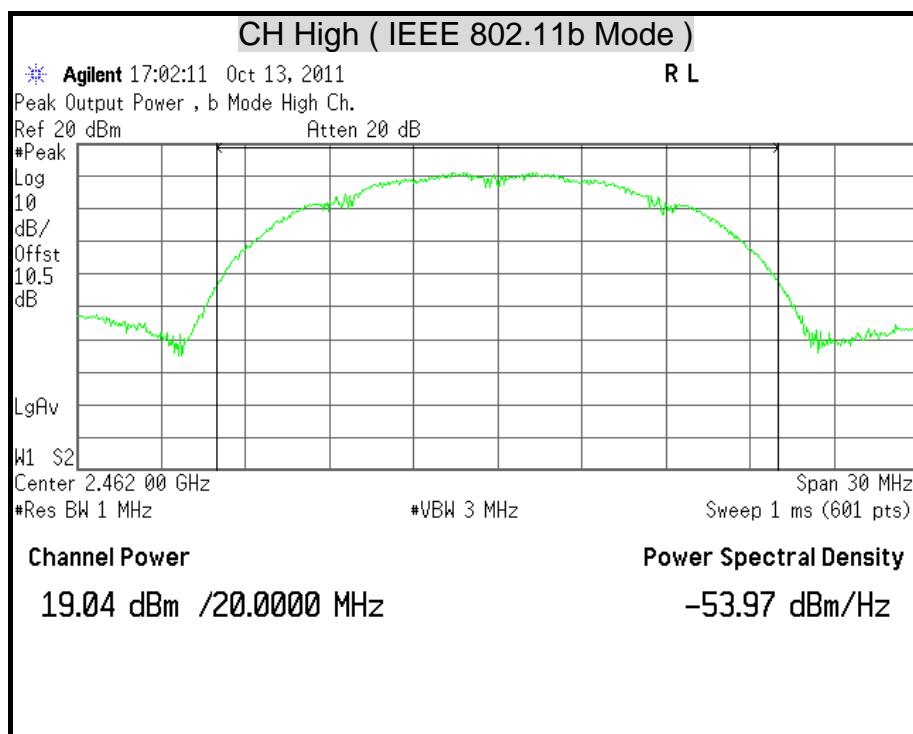

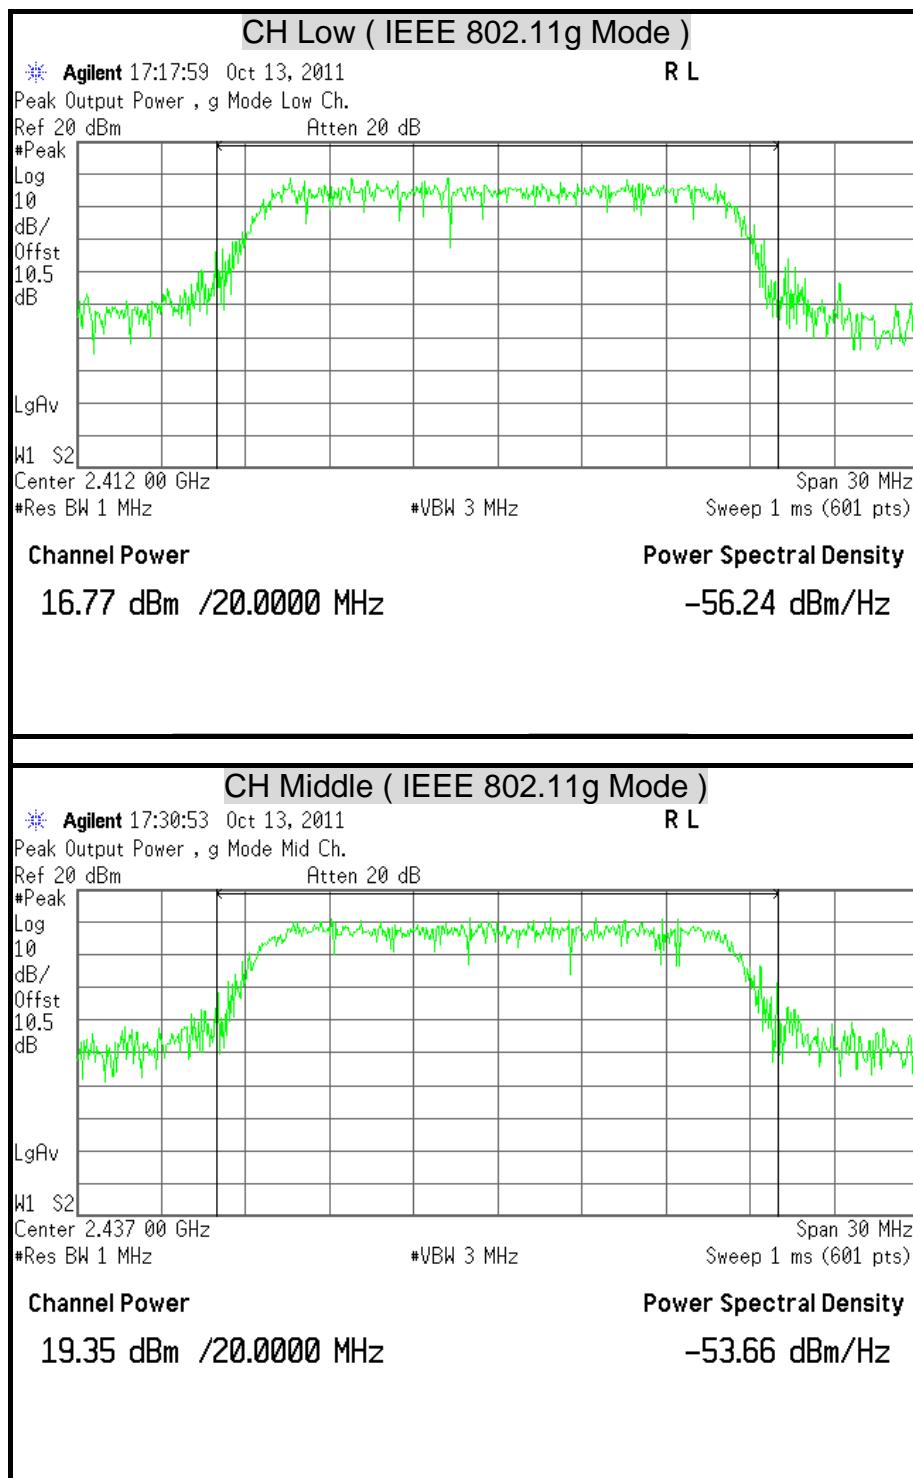

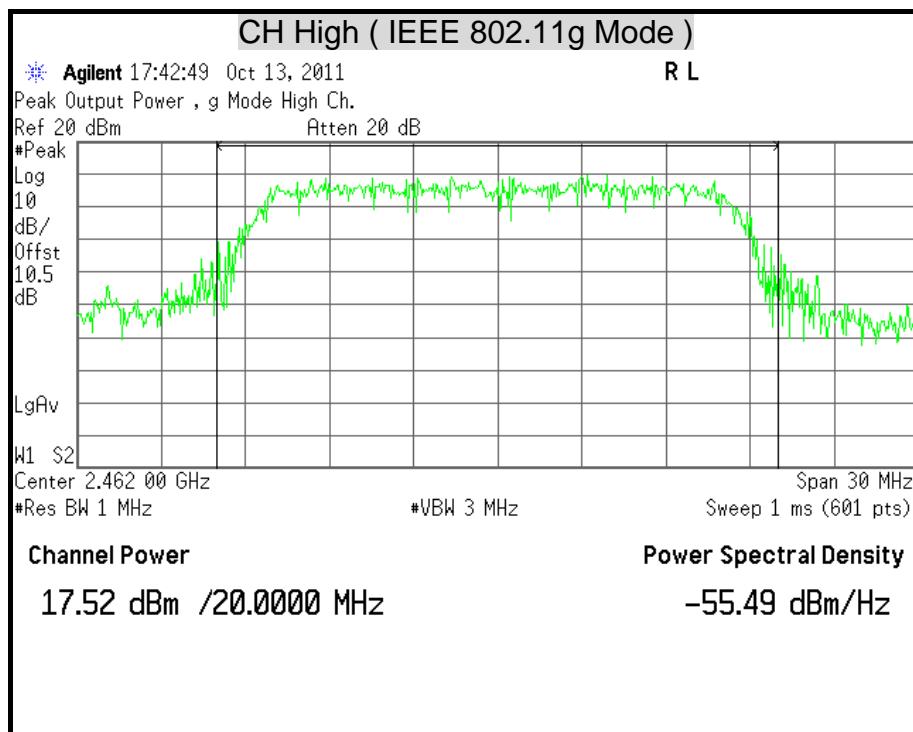



## 7.3 AVERAGE POWER

### LIMITS

None; for reporting purposes only.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	AGILENT	E4446A	MY46180323	04/24/2012

*Remark:* Each piece of equipment is scheduled for calibration once a year.

### TEST SETUP



### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The Spectrum analyzer is set to the average power detection.



## TEST RESULTS

### IEEE 802.11b Mode

Channel	Channel Frequency (MHz)	Average Power Output (dBm)
Low	2412	15.77
Middle	2437	16.15
High	2462	16.30

**Remark:**

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

### IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	Average Power Output (dBm)
Low	2412	13.65
Middle	2437	15.94
High	2462	14.29

**Remark:**

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



## 7.4 POWER SPECTRAL DENSITY

### LIMITS


§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	AGILENT	E4446A	MY46180323	04/24/2012

*Remark:* Each piece of equipment is scheduled for calibration once a year.

### TEST SETUP

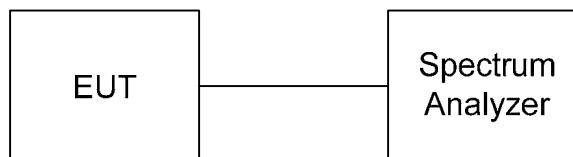

### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 3KHz and VBW = RBW, set sweep time = span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.



## TEST RESULTS

### IEEE 802.11b Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2412	-6.51	8	PASS
Middle	2437	-6.08	8	PASS
High	2462	-5.80	8	PASS

**Remark:**


1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.


### IEEE 802.11g Mode


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2412	-15.22	8	PASS
Middle	2437	-13.27	8	PASS
High	2462	-14.49	8	PASS


**Remark:**

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

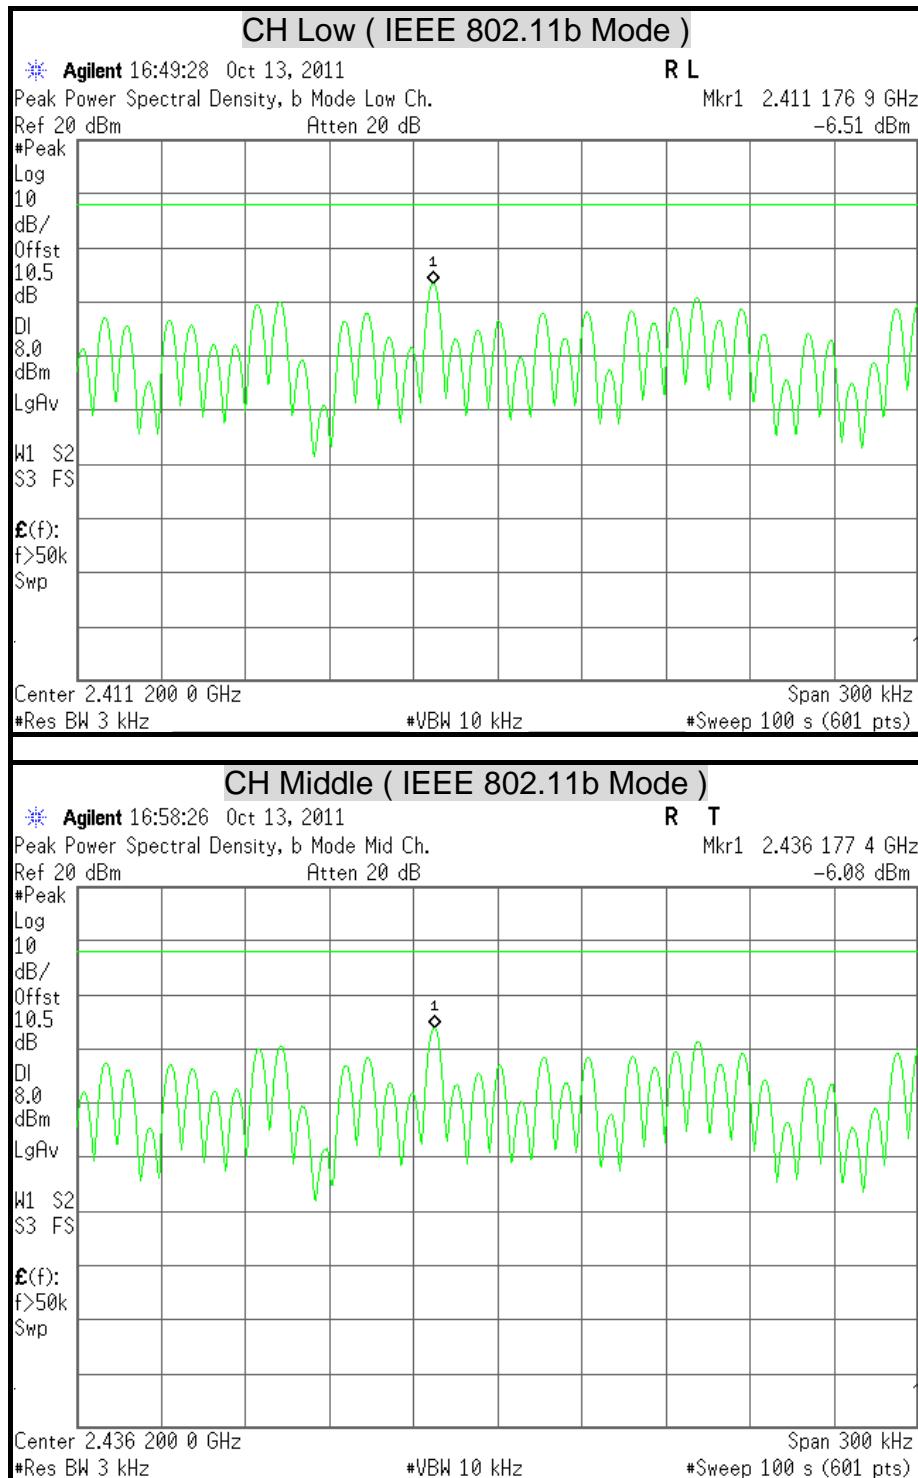POWER SPECTRAL DENSITY

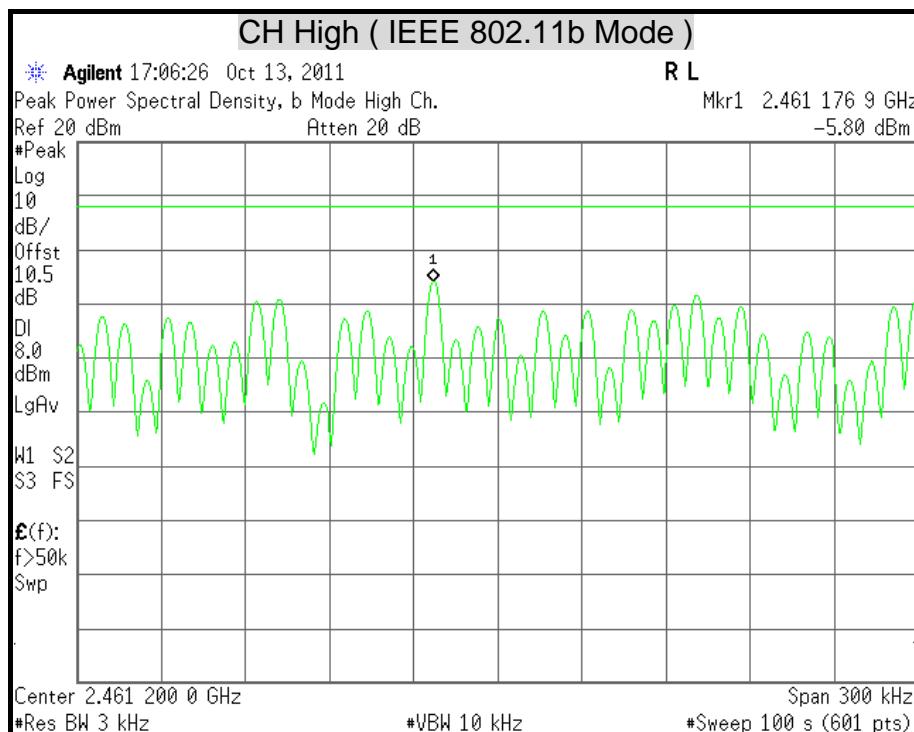

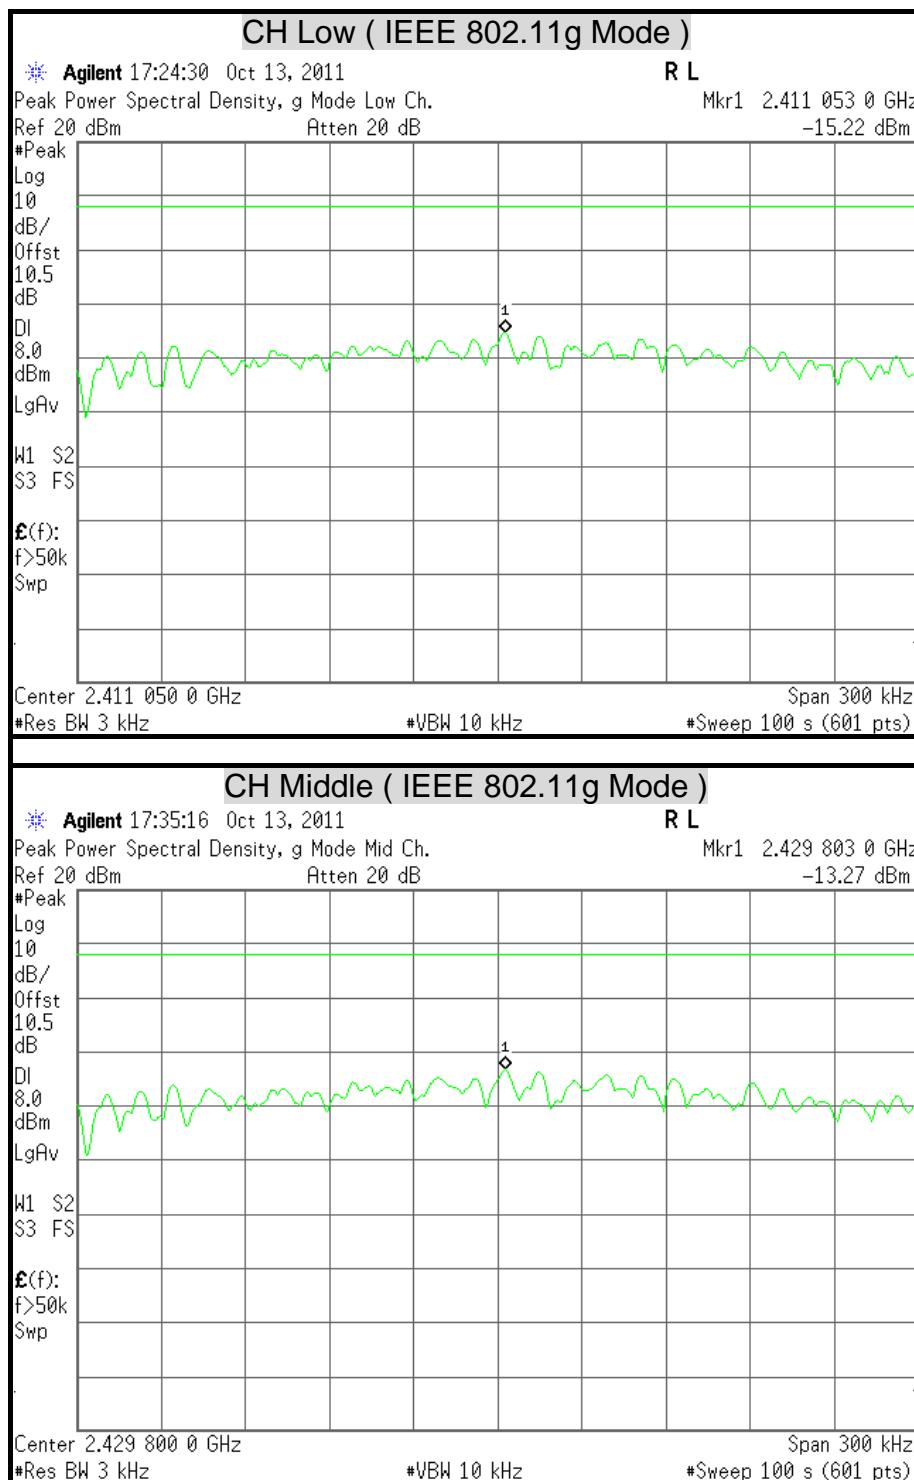

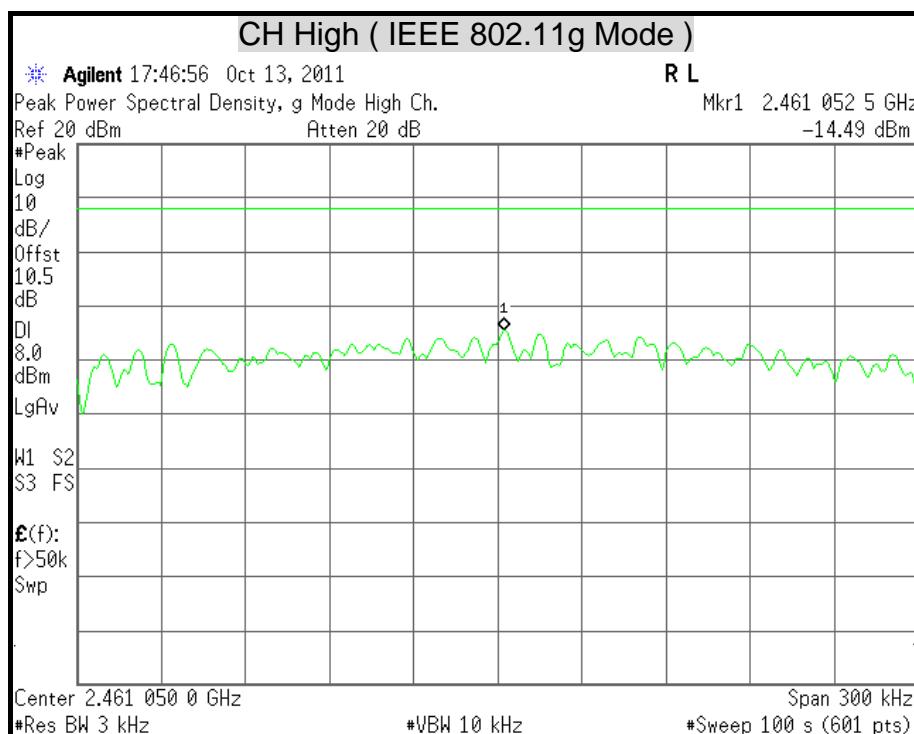



## 7.5 CONDUCTED SPURIOUS EMISSION

### LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	AGILENT	E4446A	MY46180323	04/24/2012

*Remark:* Each piece of equipment is scheduled for calibration once a year.


### TEST SETUP

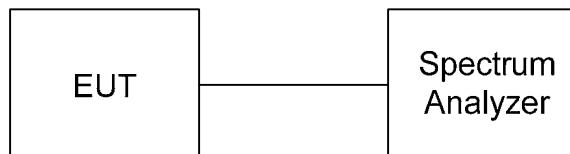



### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

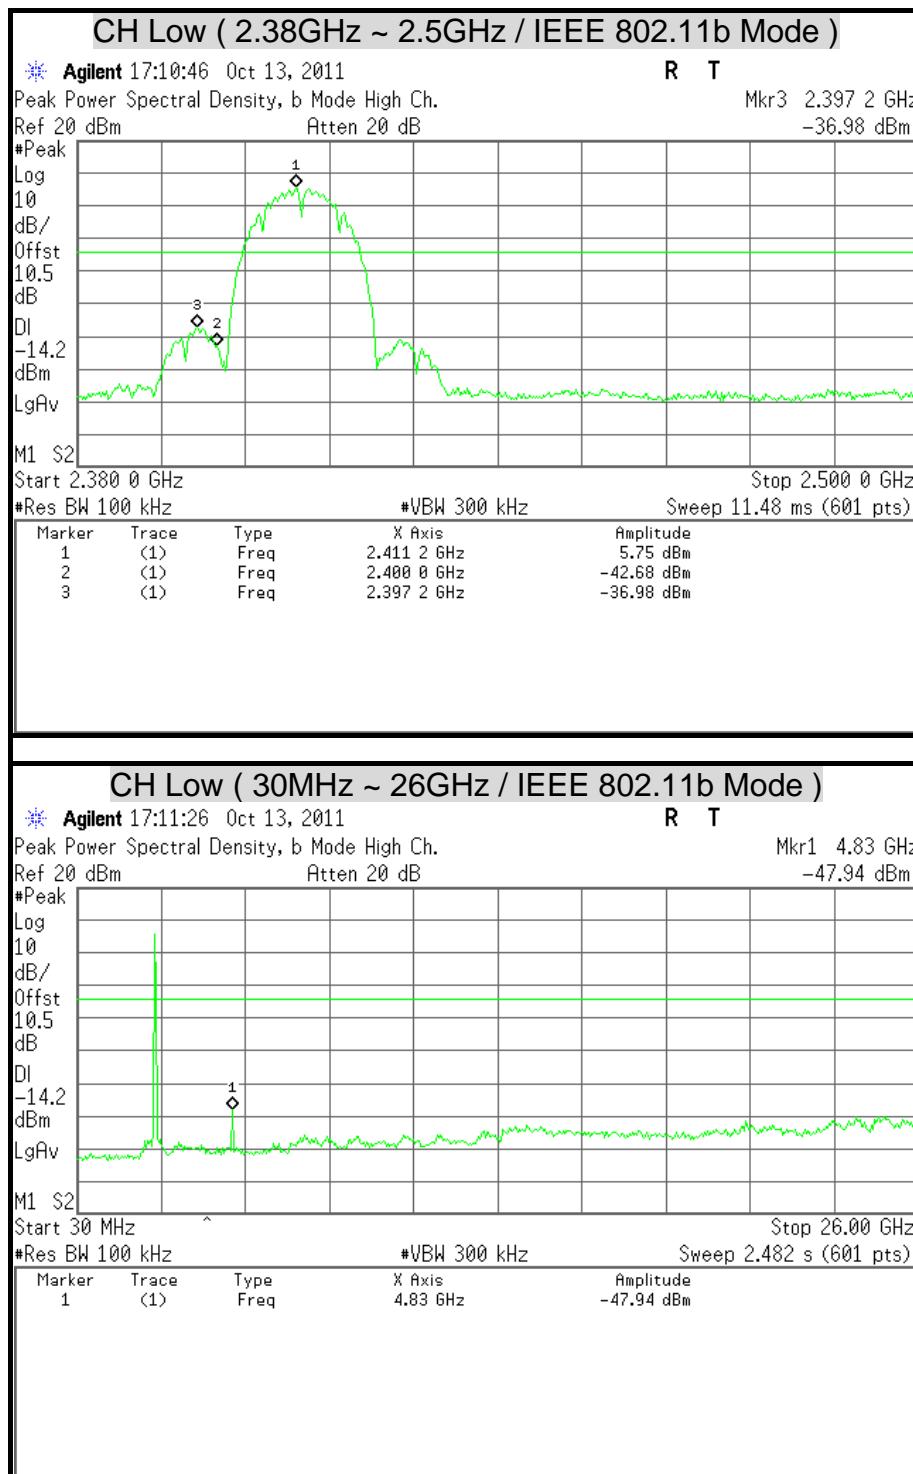
**TEST RESULTS****OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT**

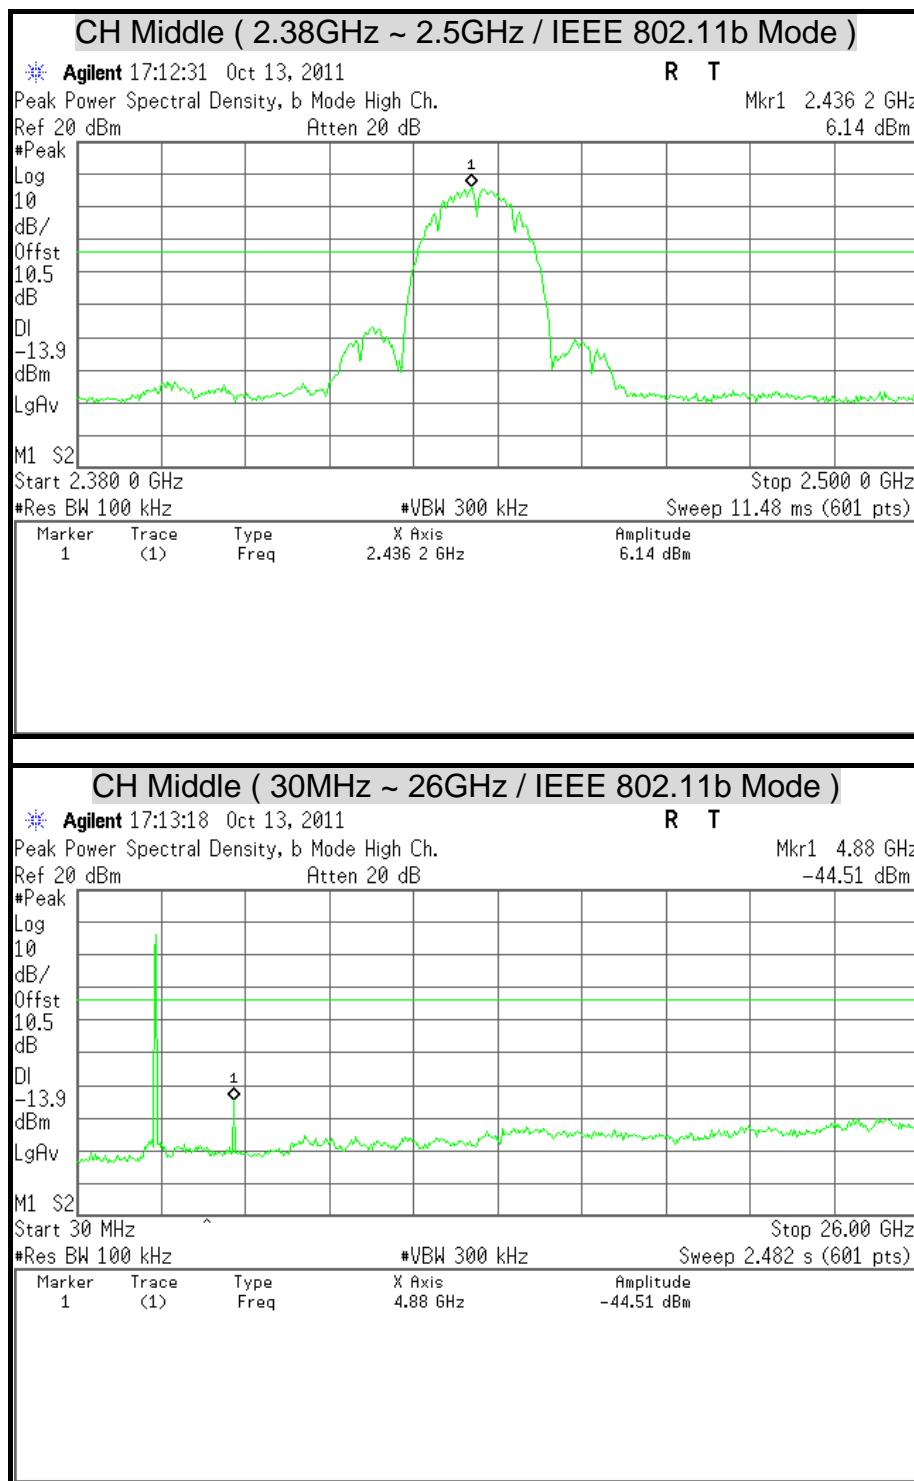

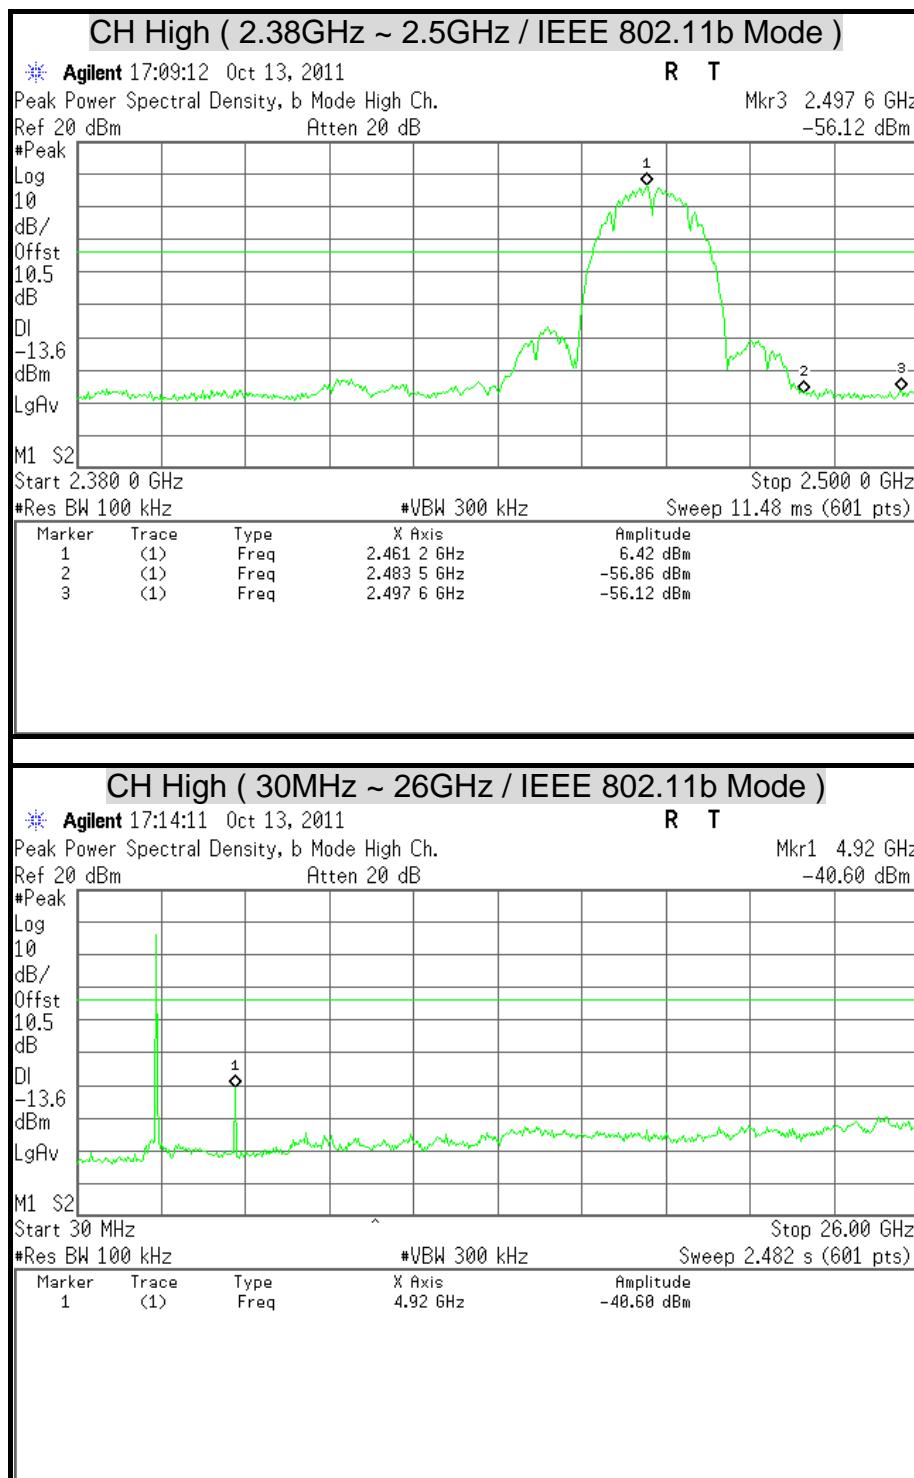

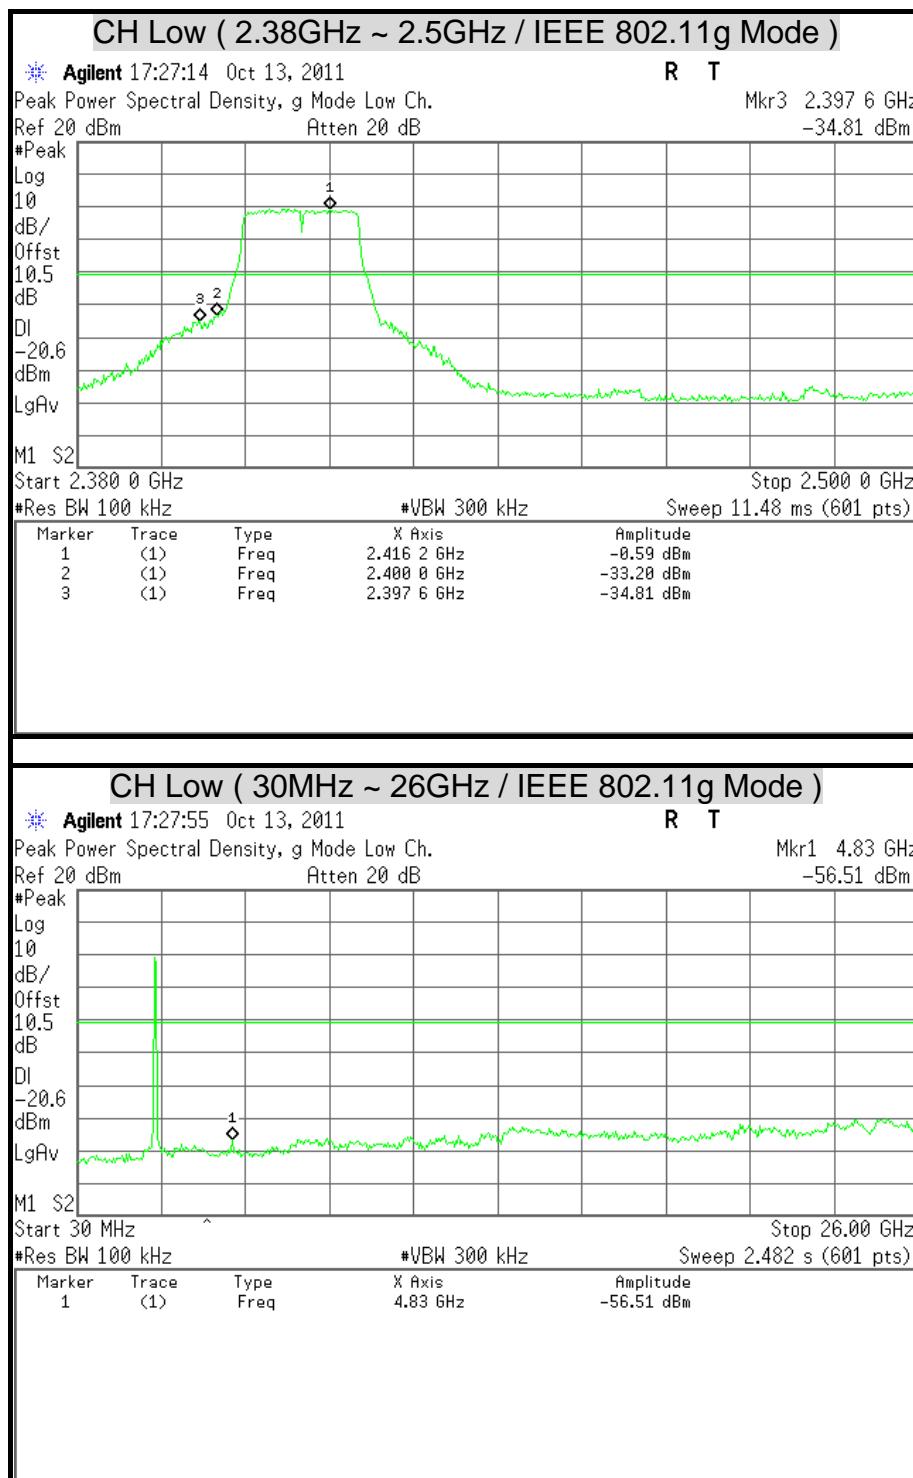

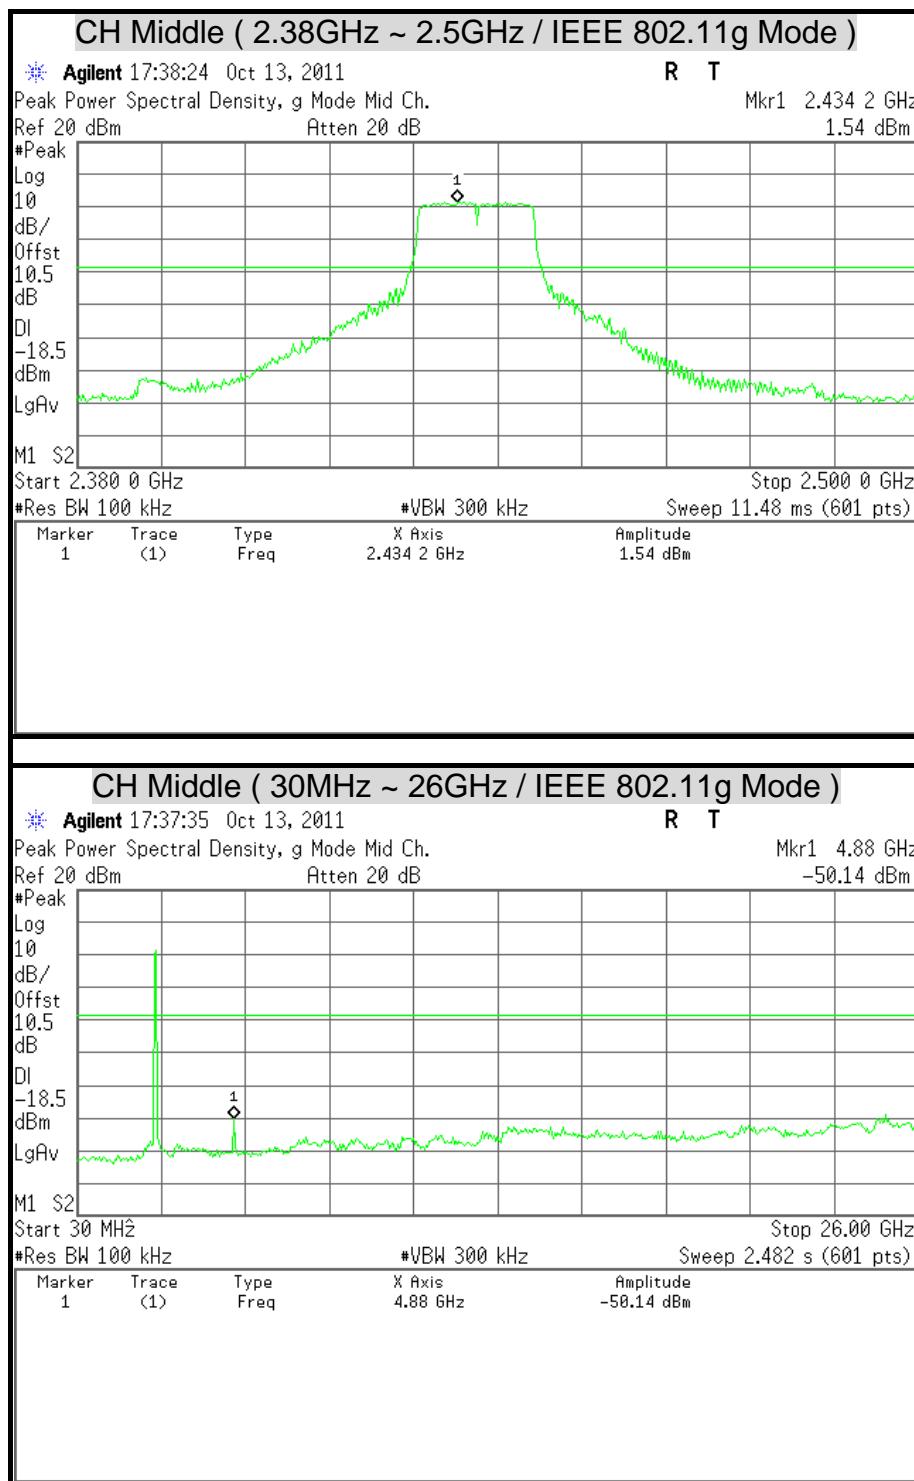

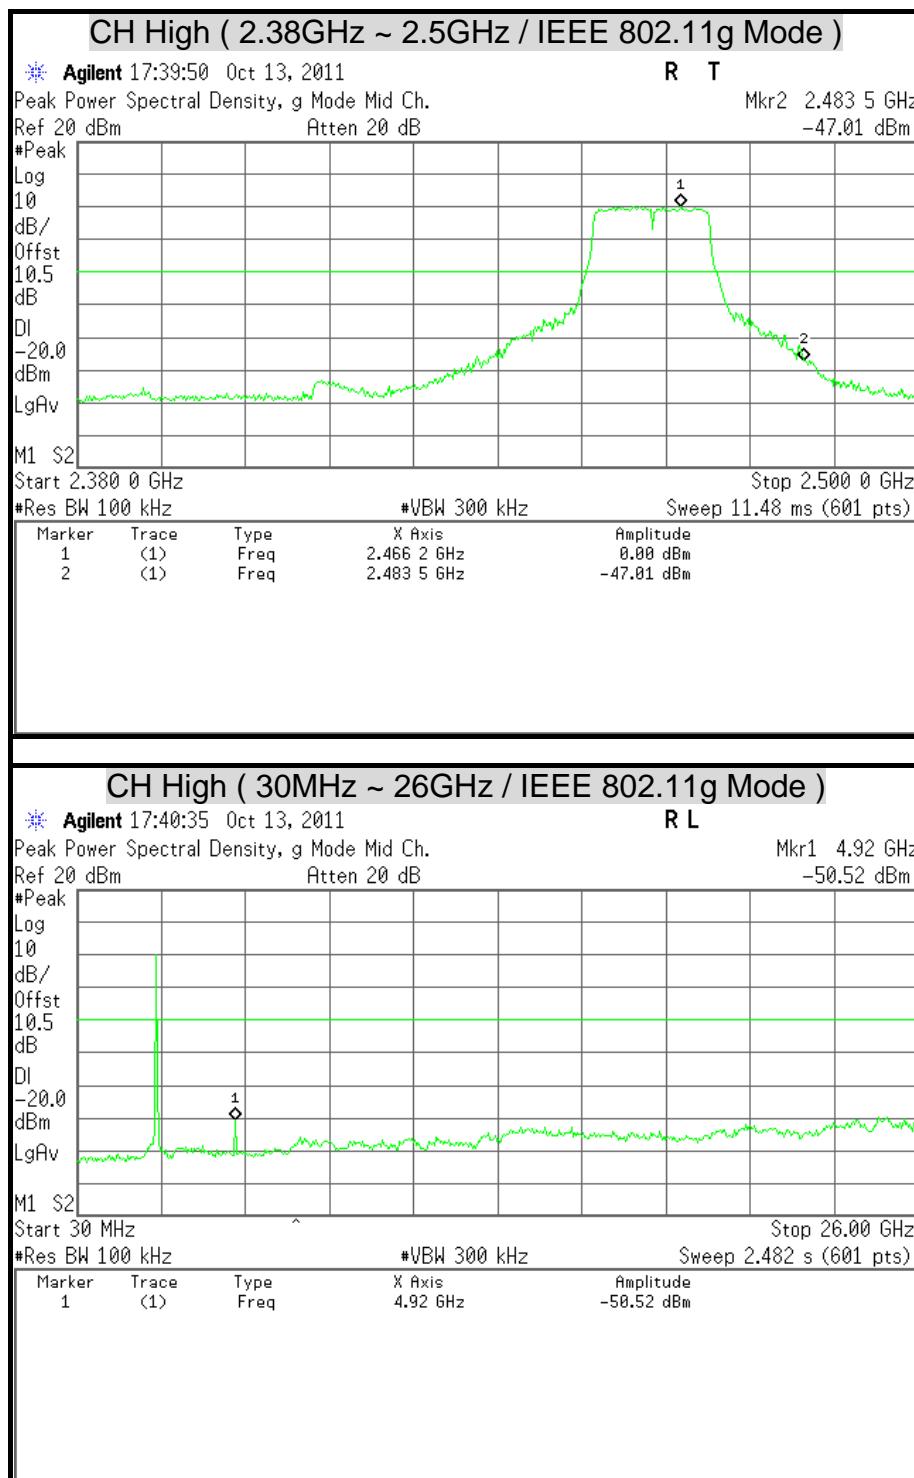



## 7.6 RADIATED EMISSION

### LIMITS

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

**Remark:**

1. <sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2. <sup>2</sup> Above 38.6

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



(3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

**Remark:** \*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## TEST EQUIPMENT

### 966Chamber\_B

Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/19/2012
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101131	01/13/2012
Broadband Hybrid Bi-Log Antenna	Sunol Sciences	JB1	A100209-4	10/05/2012
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078732	07/03/2012
Horn Antenna	COM-POWER	AH-840	03077	12/12/2011
Pre-Amplifier	Agilent	8447D	2944A10052	07/19/2012
Pre-Amplifier	Agilent	8449B	3008A01916	09/18/2012
Notch Filters Band Reject	Micro-Tronics	BRM05702-01	026	N.C.R
LOOP Antenna	EMCO	6502	8905-2356	06/10/2012

**Remark:** 1. Each piece of equipment is scheduled for calibration once a year.


2. N.C.R = No Calibration Request.



## TEST SETUP


The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.

**9kHz ~ 30MHz**

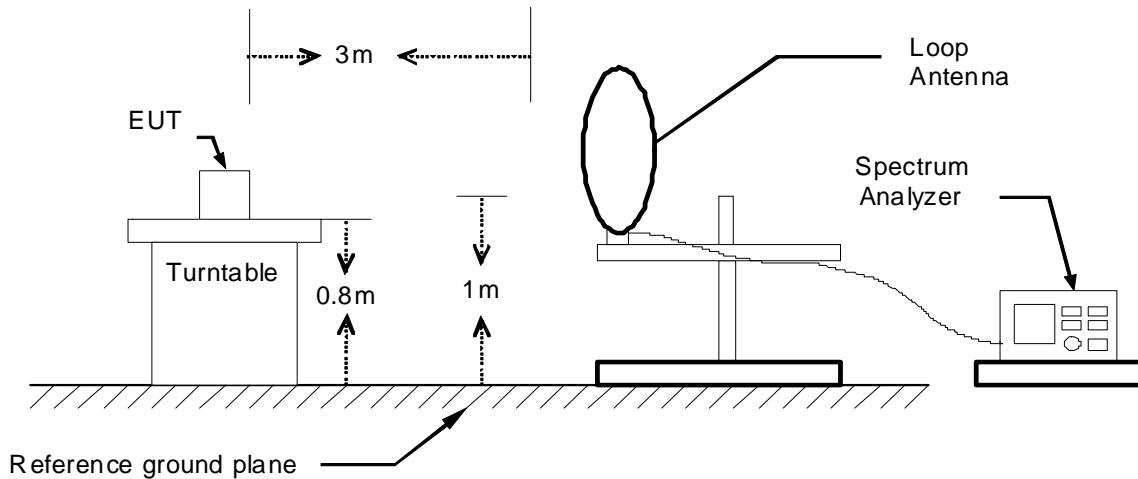




## 30MHz ~ 1GHz

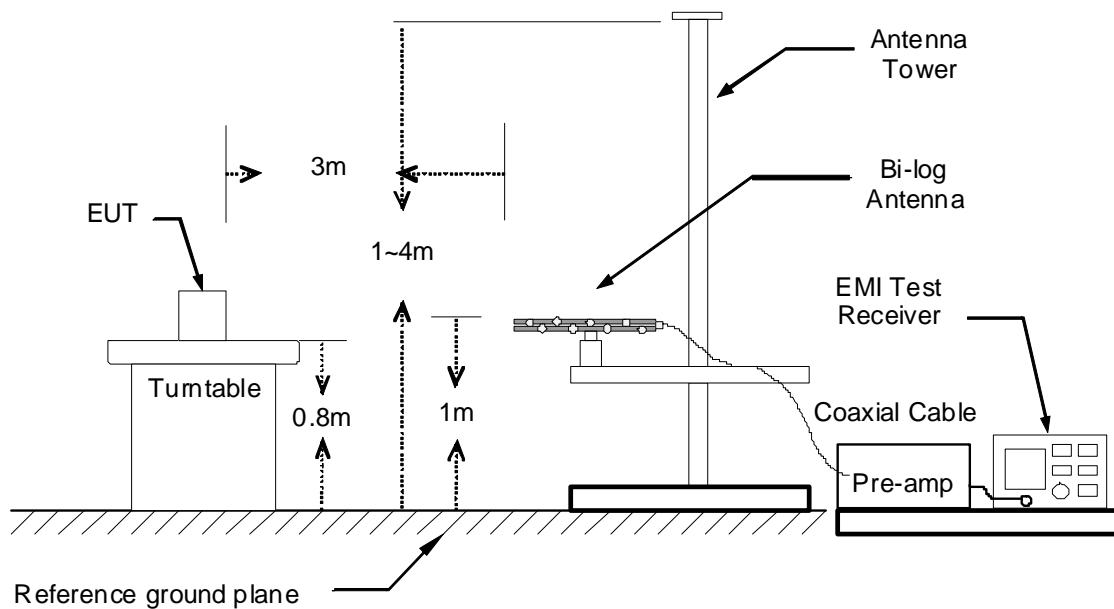

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

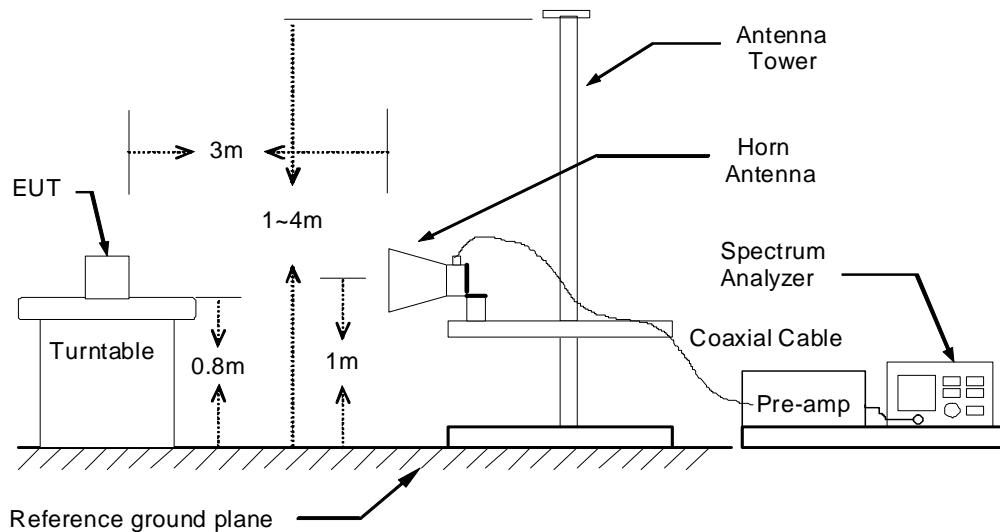



## TEST PROCEDURE

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

### **Remark :**

1. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.*
2. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.*
3. *The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.*



## TEST RESULTS

### **Below 1 GHz (9kHz ~ 30MHz)**

No emission found between lowest internal used/generated frequency to 30MHz.

### **Below 1 GHz (30MHz ~ 1GHz)**

<b>Product Name</b>	802.11 b/g WiFi Module Board	<b>Test By</b>	Bell Huang
<b>Test Model</b>	AXM22001-2A-C	<b>Test Date</b>	2011/10/11
<b>Test Mode</b>	Normal Operating	<b>TEMP &amp; Humidity</b>	23.5°C, 58%

<b>966 Chamber_B at 3Meter / Horizontal</b>						
Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Remark
84.32	49.86	-19.88	29.99	40.00	-10.01	Peak
317.12	42.55	-11.58	30.97	46.00	-15.03	Peak
359.80	45.32	-10.56	34.75	46.00	-11.25	Peak
559.62	44.64	-7.58	37.06	46.00	-8.94	Peak
573.20	42.86	-7.43	35.43	46.00	-10.57	Peak
586.78	42.14	-7.28	34.86	46.00	-11.14	Peak
640.13	38.59	-6.41	32.18	46.00	-13.82	Peak

<b>966 Chamber_B at 3Meter / Vertical</b>						
Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Remark
33.88	39.95	-9.53	30.41	40.00	-9.59	Peak
84.32	54.17	-19.88	34.29	40.00	-5.71	Peak
101.78	50.75	-16.72	34.03	43.50	-9.47	Peak
313.24	47.81	-11.68	36.13	46.00	-9.87	Peak
640.13	39.10	-6.41	32.69	46.00	-13.31	Peak
845.77	36.41	-3.06	33.35	46.00	-12.65	Peak

#### **Remark:**

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dB $\mu$ V/m) - Quasi-peak limit (dB $\mu$ V/m).



## Above 1 GHz

<b>Product Name</b>	802.11 b/g WiFi Module Board	<b>Test By</b>	Bell Huang
<b>Test Model</b>	AXM22001-2A-C	<b>Test Date</b>	2011/10/13
<b>Test Mode</b>	IEEE 802.11b TX / CH Low	<b>TEMP &amp; Humidity</b>	24°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1124.00	55.85	---	-3.66	52.20	---	74.00	54.00	-1.80	Peak
1216.00	55.44	---	-3.38	52.05	---	74.00	54.00	-1.95	Peak
1538.00	57.31	51.30	-2.19	55.12	49.11	74.00	54.00	-4.89	AVG
1606.00	57.91	45.45	-1.54	56.37	43.91	74.00	54.00	-10.09	AVG
3990.00	42.12	---	6.51	48.63	---	74.00	54.00	-5.37	Peak
4830.00	40.64	---	9.05	49.70	---	74.00	54.00	-4.30	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1126.00	58.29	46.26	-3.65	54.64	42.61	74.00	54.00	-11.39	AVG
1286.00	56.47	---	-3.18	53.29	---	74.00	54.00	-0.71	Peak
1538.00	56.78	49.76	-2.19	54.59	47.57	74.00	54.00	-6.43	AVG
1610.00	63.02	49.58	-1.50	61.52	48.08	74.00	54.00	-5.92	AVG
3735.00	43.98	---	6.03	50.01	---	74.00	54.00	-3.99	Peak
4830.00	40.57	---	9.05	49.62	---	74.00	54.00	-4.38	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(AV)  
Remark AVG = Result(AV) - Limit(AV)



<b>Product Name</b>	802.11 b/g WiFi Module Board	<b>Test By</b>	Bell Huang
<b>Test Model</b>	AXM22001-2A-C	<b>Test Date</b>	2011/10/13
<b>Test Mode</b>	IEEE 802.11b TX / CH Middle	<b>TEMP &amp; Humidity</b>	24°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1124.00	55.99	---	-3.66	52.33	---	74.00	54.00	-1.67	Peak
1286.00	56.02	---	-3.18	52.84	---	74.00	54.00	-1.16	Peak
1538.00	56.81	49.57	-2.19	54.62	47.38	74.00	54.00	-6.62	AVG
1608.00	57.67	44.88	-1.52	56.15	43.36	74.00	54.00	-10.64	AVG
4470.00	41.65	---	8.73	50.38	---	74.00	54.00	-3.62	Peak
4875.00	41.62	---	9.08	50.70	---	74.00	54.00	-3.30	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1126.00	59.44	47.43	-3.65	55.79	43.78	74.00	54.00	-10.22	AVG
1284.00	56.55	---	-3.19	53.37	---	74.00	54.00	-0.63	Peak
1538.00	57.75	51.83	-2.19	55.56	49.64	74.00	54.00	-4.36	AVG
1606.00	62.46	49.25	-1.54	60.92	47.71	74.00	54.00	-6.29	AVG
3840.00	42.88	---	6.23	49.11	---	74.00	54.00	-4.89	Peak
4875.00	41.11	---	9.08	50.19	---	74.00	54.00	-3.81	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor  
Margin = Result – Limit  
Remark Peak = Result(PK) – Limit(AV)  
Remark AVG = Result(AV) – Limit(AV)



<b>Product Name</b>	802.11 b/g WiFi Module Board	<b>Test By</b>	Bell Huang
<b>Test Model</b>	AXM22001-2A-C	<b>Test Date</b>	2011/10/13
<b>Test Mode</b>	IEEE 802.11b TX / CH High	<b>TEMP &amp; Humidity</b>	24°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1126.00	58.63	44.84	-3.65	54.98	41.19	74.00	54.00	-12.81	AVG
1286.00	55.70	---	-3.18	52.52	---	74.00	54.00	-1.48	Peak
1538.00	57.11	43.72	-2.19	54.92	41.53	74.00	54.00	-12.47	AVG
1608.00	57.84	44.97	-1.52	56.32	43.45	74.00	54.00	-10.55	AVG
4185.00	42.13	---	7.40	49.52	---	74.00	54.00	-4.48	Peak
4920.00	41.32	---	9.11	50.43	---	74.00	54.00	-3.57	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1124.00	58.21	46.40	-3.66	54.55	42.74	74.00	54.00	-11.26	AVG
1284.00	56.24	---	-3.19	53.05	---	74.00	54.00	-0.95	Peak
1538.00	57.45	51.32	-2.19	55.26	49.13	74.00	54.00	-4.87	AVG
1608.00	62.98	49.25	-1.52	61.46	47.73	74.00	54.00	-6.27	AVG
3450.00	43.08	---	5.54	48.62	---	74.00	54.00	-5.38	Peak
4920.00	41.26	---	9.11	50.36	---	74.00	54.00	-3.64	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(AV)  
Remark AVG = Result(AV) - Limit(AV)



<b>Product Name</b>	802.11 b/g WiFi Module Board	<b>Test By</b>	Bell Huang
<b>Test Model</b>	AXM22001-2A-C	<b>Test Date</b>	2011/10/13
<b>Test Mode</b>	IEEE 802.11g TX / CH Low	<b>TEMP &amp; Humidity</b>	24°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1122.00	57.94	45.65	-3.66	54.28	41.99	74.00	54.00	-12.01	AVG
1426.00	55.45	---	-2.77	52.68	---	74.00	54.00	-1.32	Peak
1538.00	57.74	52.34	-2.19	55.55	50.15	74.00	54.00	-3.85	AVG
1606.00	58.11	45.62	-1.54	56.57	44.08	74.00	54.00	-9.92	AVG
3855.00	42.73	---	6.26	48.99	---	74.00	54.00	-5.01	Peak
4830.00	40.94	---	9.05	50.00	---	74.00	54.00	-4.00	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1128.00	59.61	47.01	-3.64	55.97	43.37	74.00	54.00	-10.63	AVG
1286.00	57.29	42.56	-3.18	54.11	39.38	74.00	54.00	-14.62	AVG
1538.00	57.91	52.09	-2.19	55.72	49.90	74.00	54.00	-4.10	AVG
1606.00	62.97	49.42	-1.54	61.43	47.88	74.00	54.00	-6.12	AVG
3735.00	43.28	---	6.03	49.31	---	74.00	54.00	-4.69	Peak
4830.00	40.12	---	9.05	49.17	---	74.00	54.00	-4.83	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor  
Margin = Result – Limit  
Remark Peak = Result(PK) – Limit(AV)  
Remark AVG = Result(AV) – Limit(AV)



<b>Product Name</b>	802.11 b/g WiFi Module Board	<b>Test By</b>	Bell Huang
<b>Test Model</b>	AXM22001-2A-C	<b>Test Date</b>	2011/10/13
<b>Test Mode</b>	IEEE 802.11g TX / CH Middle	<b>TEMP &amp; Humidity</b>	24°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1126.00	55.98	---	-3.65	52.33	---	74.00	54.00	-1.67	Peak
1282.00	55.29	---	-3.19	52.09	---	74.00	54.00	-1.91	Peak
1538.00	57.13	51.63	-2.19	54.94	49.44	74.00	54.00	-4.56	AVG
1608.00	58.68	45.68	-1.52	57.16	44.16	74.00	54.00	-9.84	AVG
3735.00	42.76	---	6.03	48.79	---	74.00	54.00	-5.21	Peak
4875.00	40.78	---	9.08	49.86	---	74.00	54.00	-4.14	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1128.00	58.84	47.32	-3.64	55.20	43.68	74.00	54.00	-10.32	AVG
1284.00	58.75	42.28	-3.19	55.56	39.09	74.00	54.00	-14.91	AVG
1538.00	57.47	51.37	-2.19	55.28	49.18	74.00	54.00	-4.82	AVG
1612.00	62.29	49.31	-1.48	60.81	47.83	74.00	54.00	-6.17	AVG
3735.00	43.64	---	6.03	49.67	---	74.00	54.00	-4.33	Peak
4875.00	40.51	---	9.08	49.59	---	74.00	54.00	-4.41	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor  
Margin = Result – Limit  
Remark Peak = Result(PK) – Limit(AV)  
Remark AVG = Result(AV) – Limit(AV)



<b>Product Name</b>	802.11 b/g WiFi Module Board	<b>Test By</b>	Bell Huang
<b>Test Model</b>	AXM22001-2A-C	<b>Test Date</b>	2011/10/13
<b>Test Mode</b>	IEEE 802.11g TX / CH High	<b>TEMP &amp; Humidity</b>	24°C, 58%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1124.00	56.53	---	-3.66	52.88	---	74.00	54.00	-1.12	Peak
1286.00	55.77	---	-3.18	52.59	---	74.00	54.00	-1.41	Peak
1536.00	57.10	50.30	-2.21	54.89	48.10	74.00	54.00	-5.90	AVG
1608.00	59.60	45.86	-1.52	58.08	44.34	74.00	54.00	-9.66	AVG
4410.00	42.25	---	8.45	50.70	---	74.00	54.00	-3.30	Peak
4920.00	40.04	---	9.11	49.14	---	74.00	54.00	-4.86	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1124.00	59.53	47.49	-3.66	55.87	43.83	74.00	54.00	-10.17	AVG
1282.00	56.11	---	-3.19	52.92	---	74.00	54.00	-1.08	Peak
1538.00	57.59	51.32	-2.19	55.40	49.13	74.00	54.00	-4.87	AVG
1608.00	62.21	48.40	-1.52	60.69	46.88	74.00	54.00	-7.12	AVG
3075.00	44.14	---	5.19	49.34	---	74.00	54.00	-4.66	Peak
4920.00	41.34	---	9.11	50.45	---	74.00	54.00	-3.55	Peak

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor  
Margin = Result – Limit  
Remark Peak = Result(PK) – Limit(AV)  
Remark AVG = Result(AV) – Limit(AV)



## Restricted Band Edges


## Detector Mode : Peak

## Polarity : Horizontal

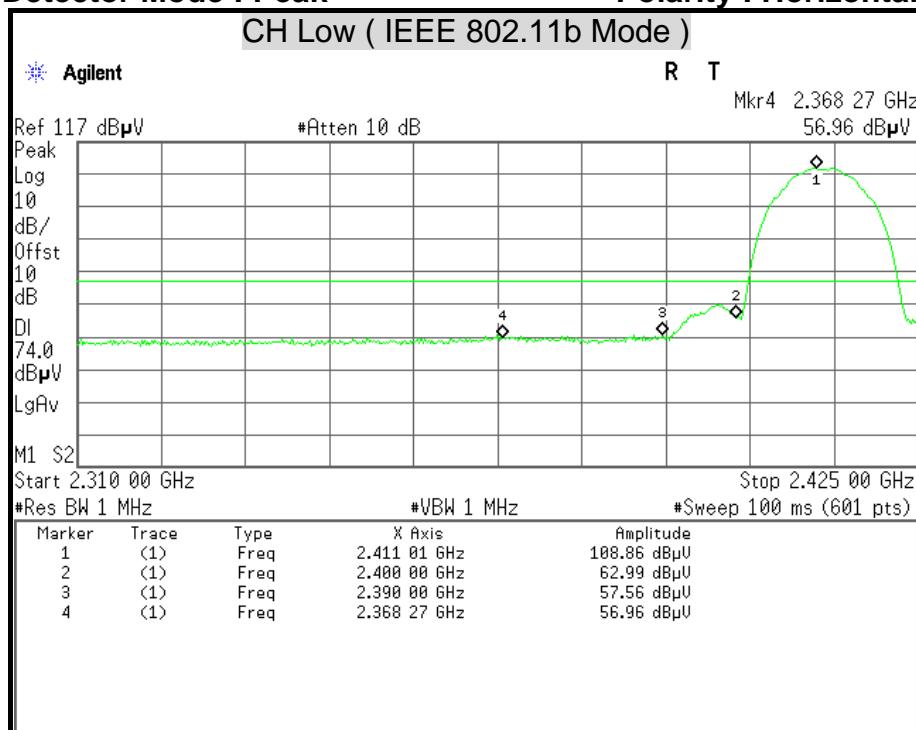

## Detector Mode : Average


## Polarity : Horizontal

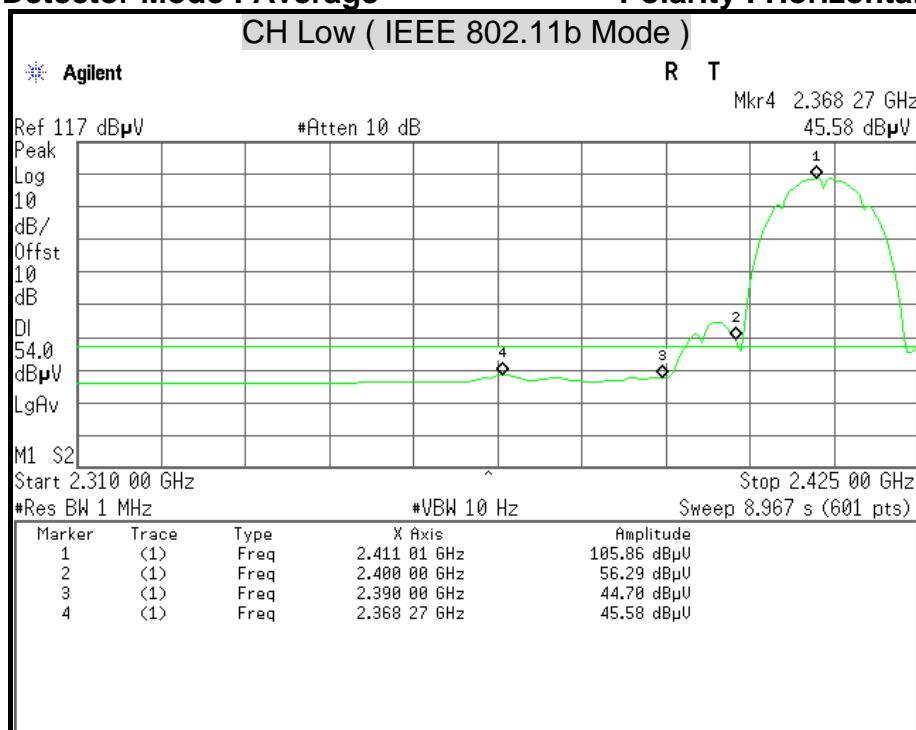




## Detector Mode : Peak



## Polarity : Vertical

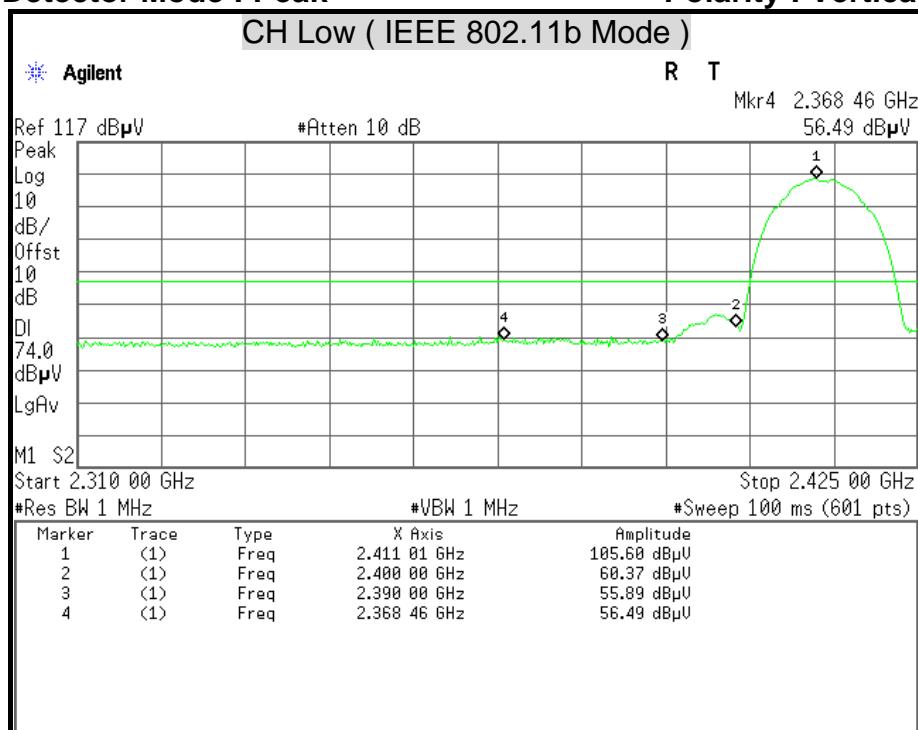

## Detector Mode : Average

## Polarity : Vertical

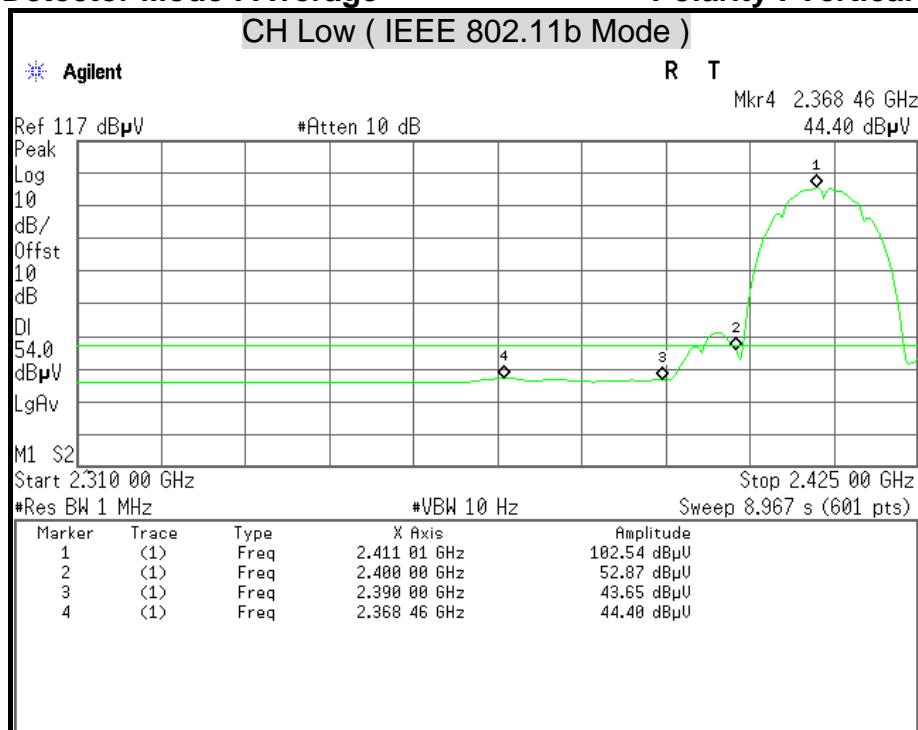


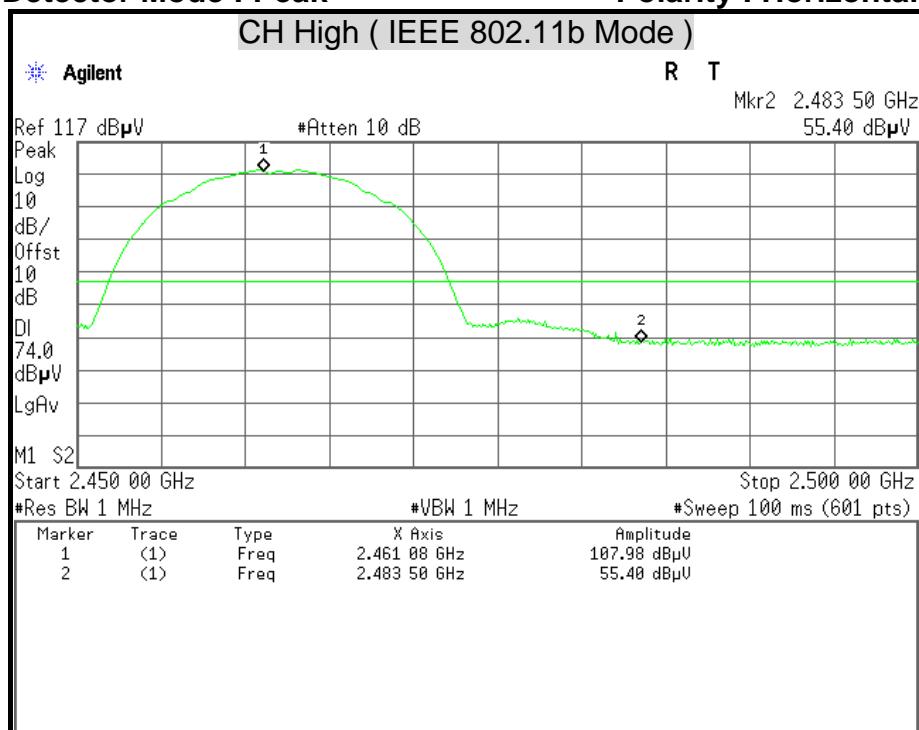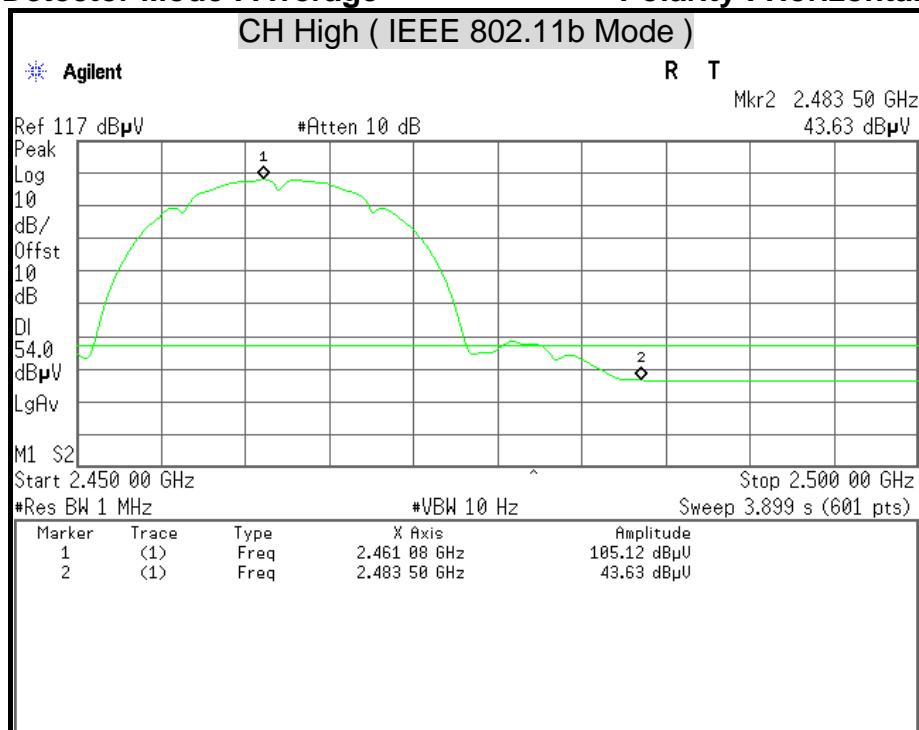**Detector Mode : Peak****Polarity : Horizontal****Detector Mode : Average****Polarity : Horizontal**




## Detector Mode : Peak

## Polarity : Vertical

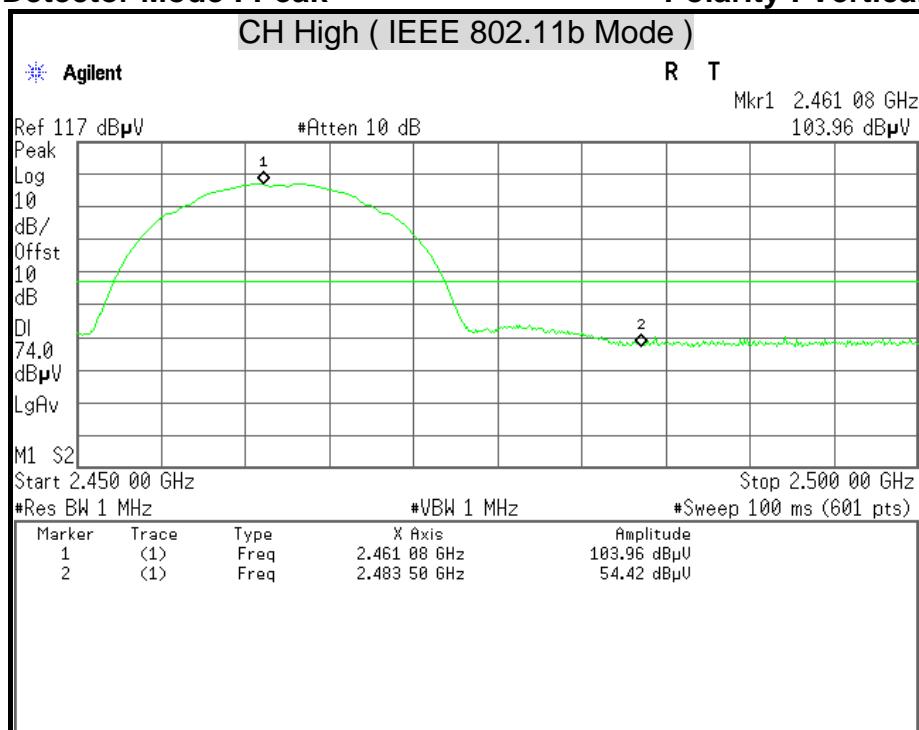

## Detector Mode : Average


## Polarity : Vertical

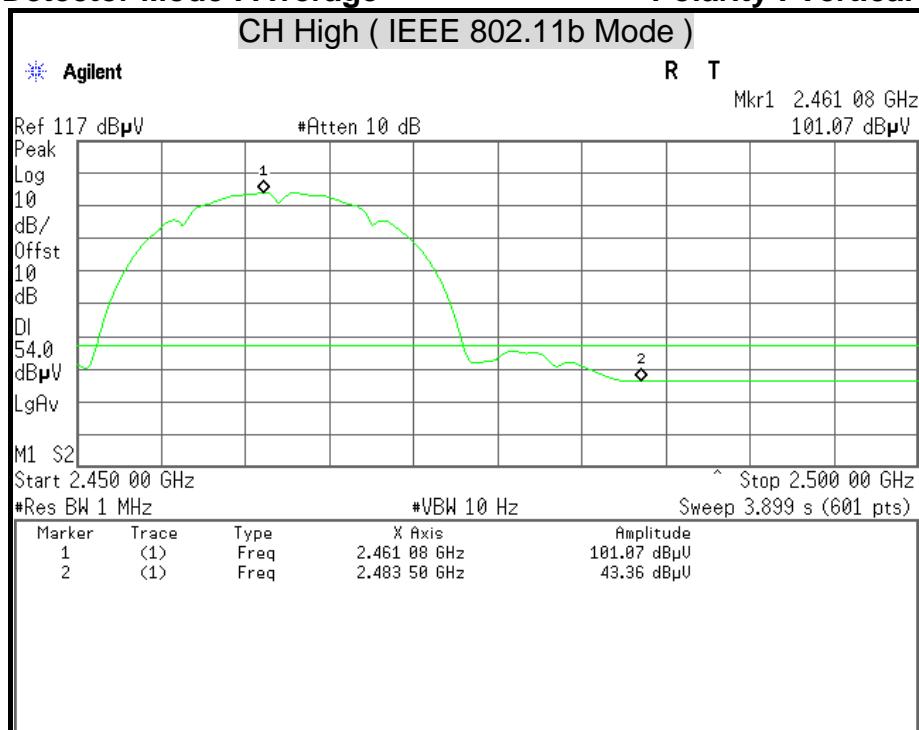




## Detector Mode : Peak

## Polarity : Horizontal

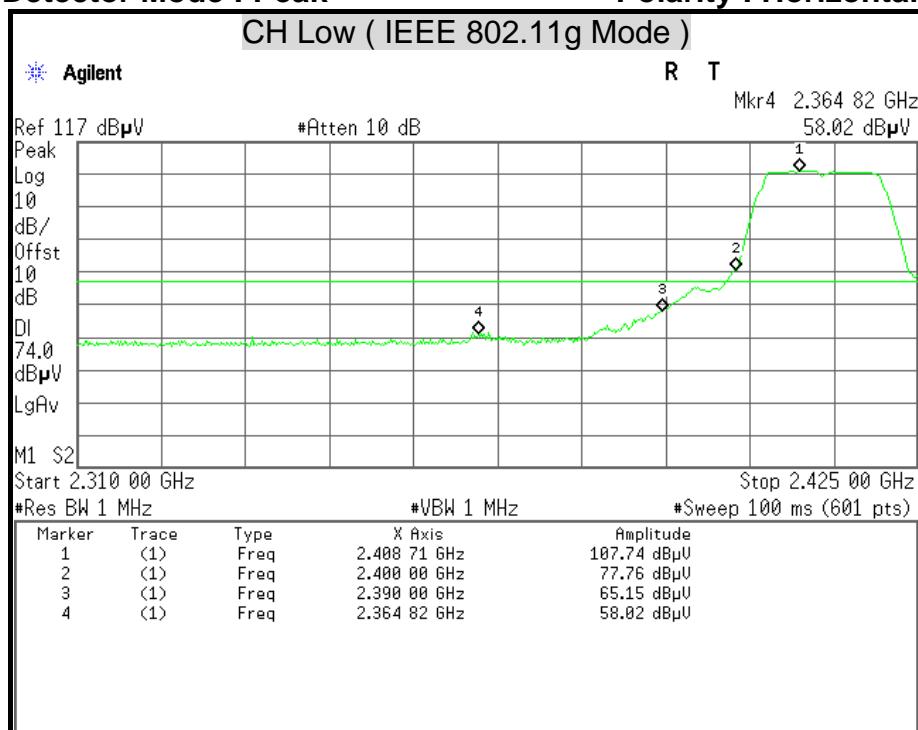

## Detector Mode : Average


## Polarity : Horizontal

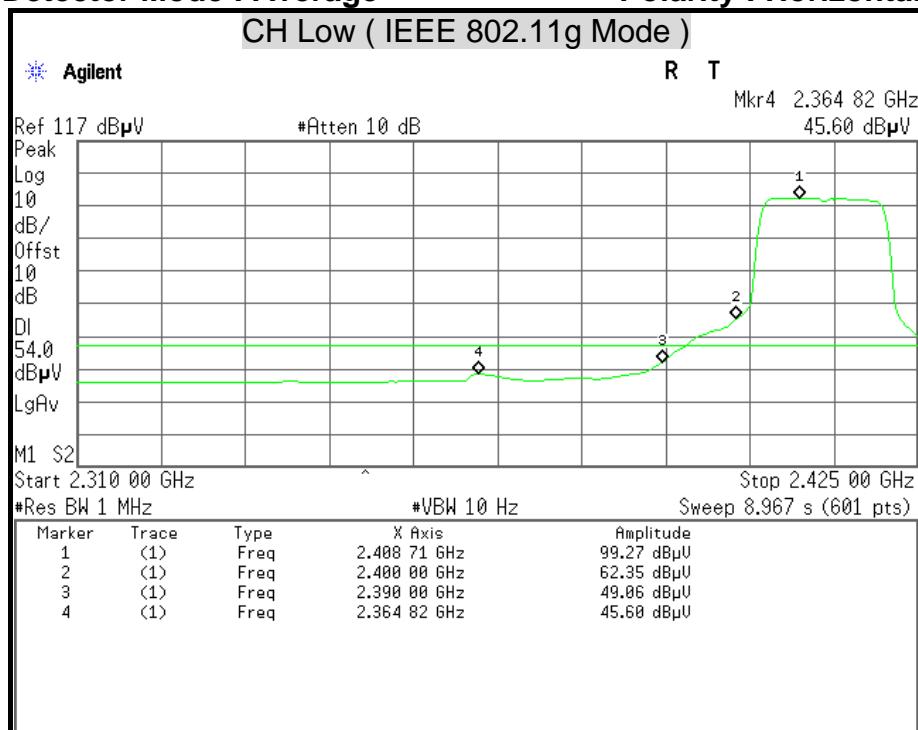




## Detector Mode : Peak



## Polarity : Vertical


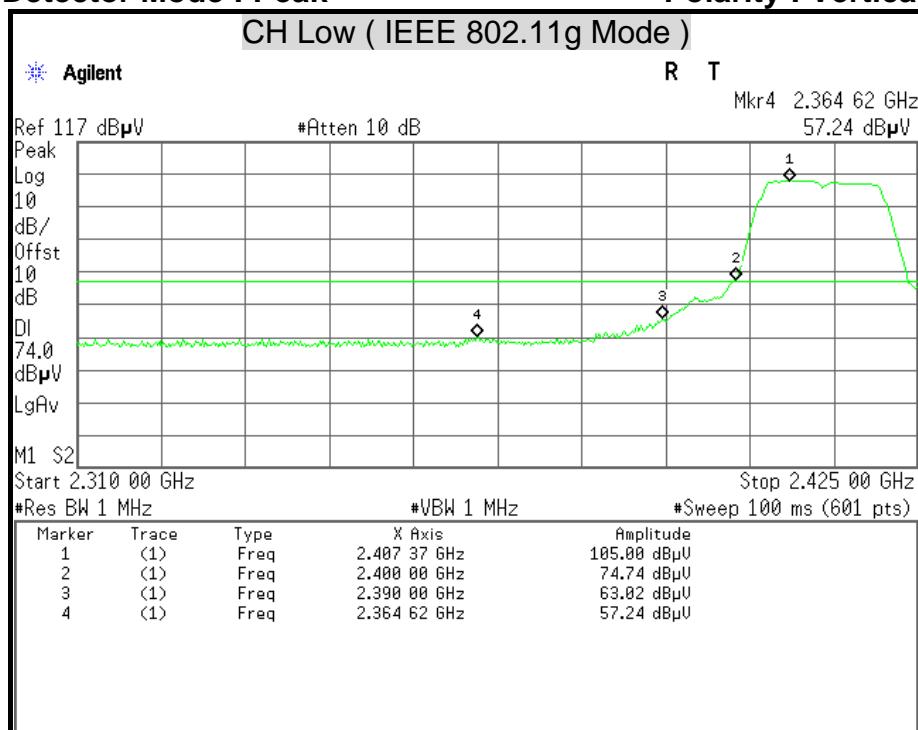


## Detector Mode : Average

## Polarity : Vertical

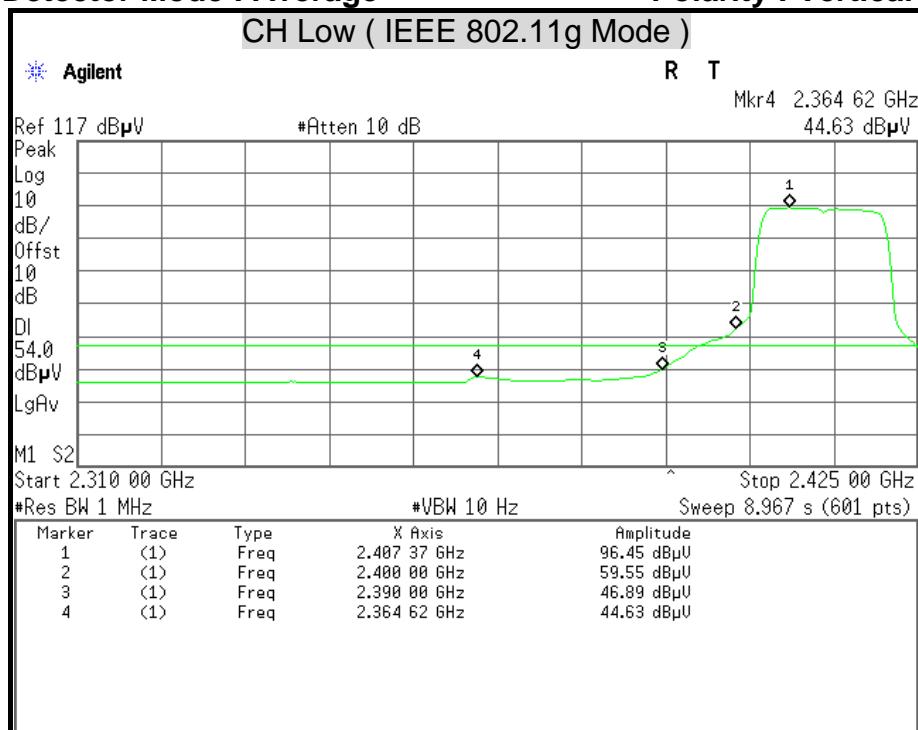

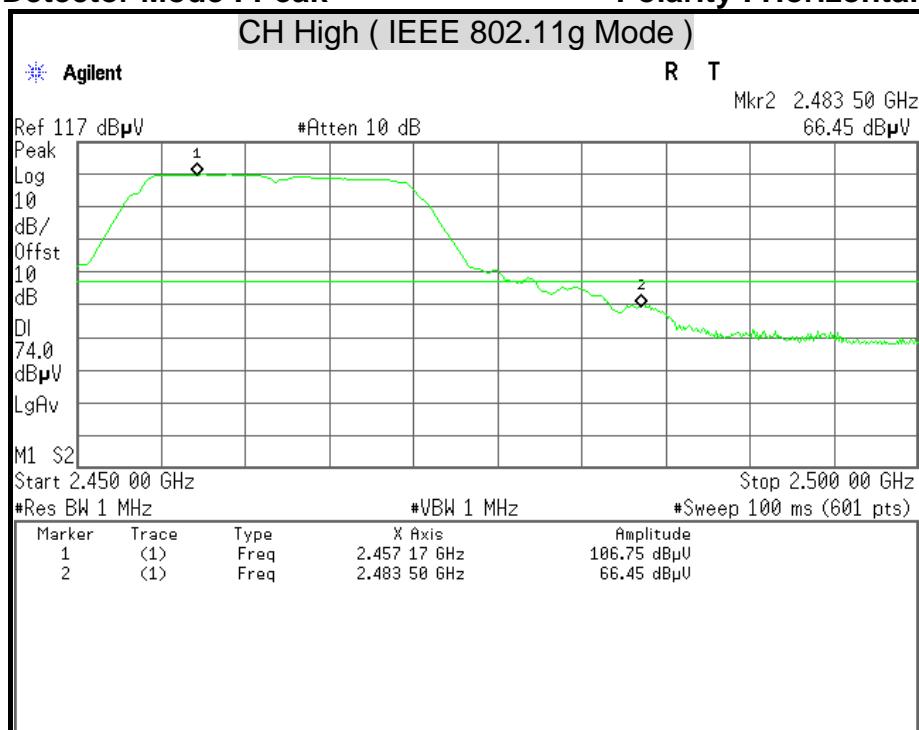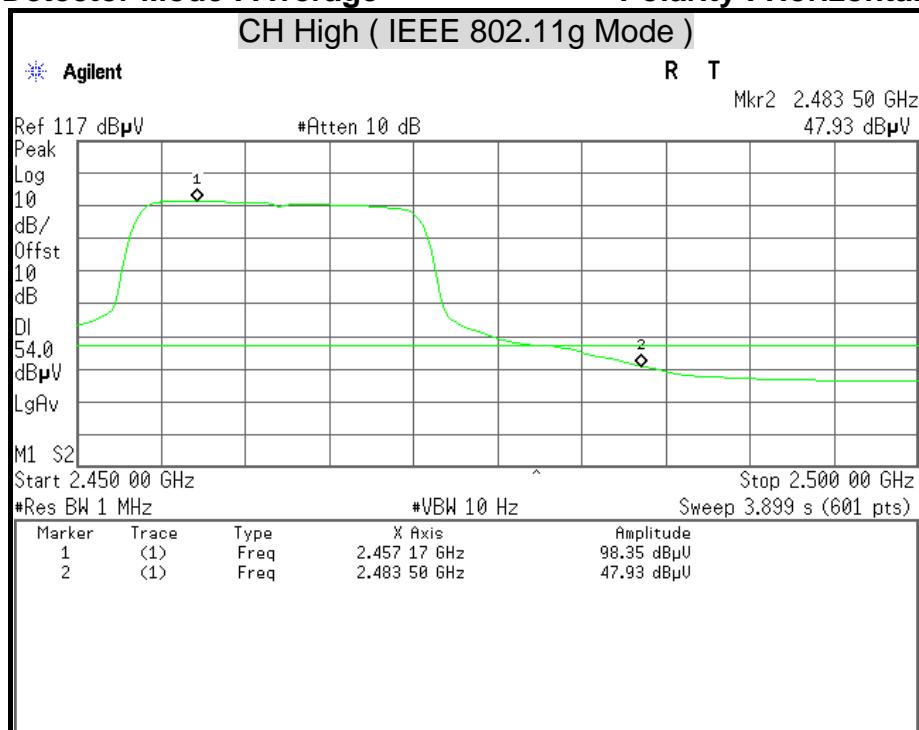**Detector Mode : Peak****Polarity : Horizontal****Detector Mode : Average****Polarity : Horizontal**

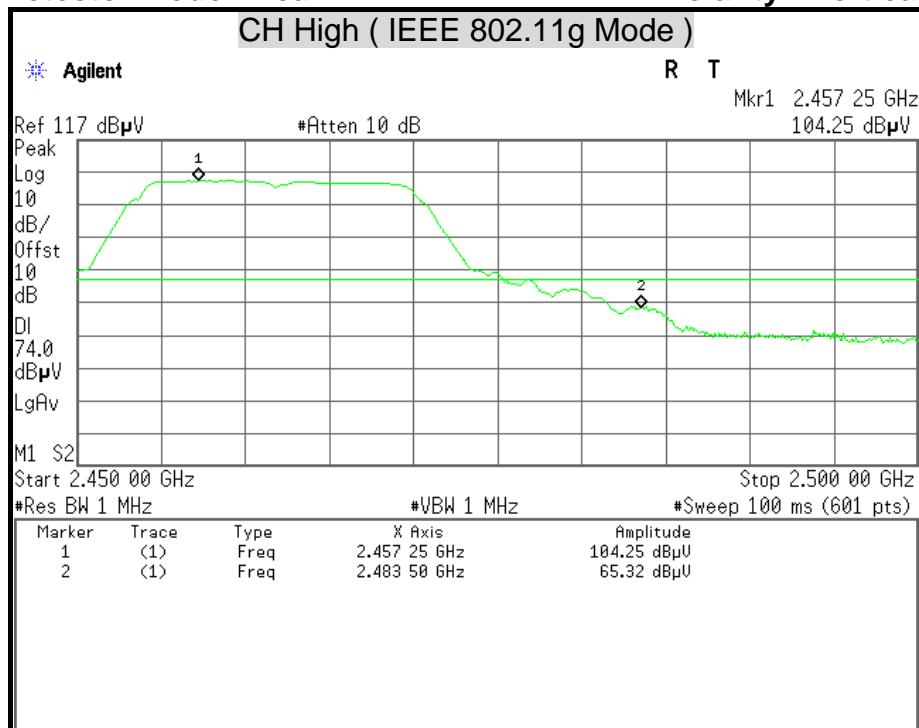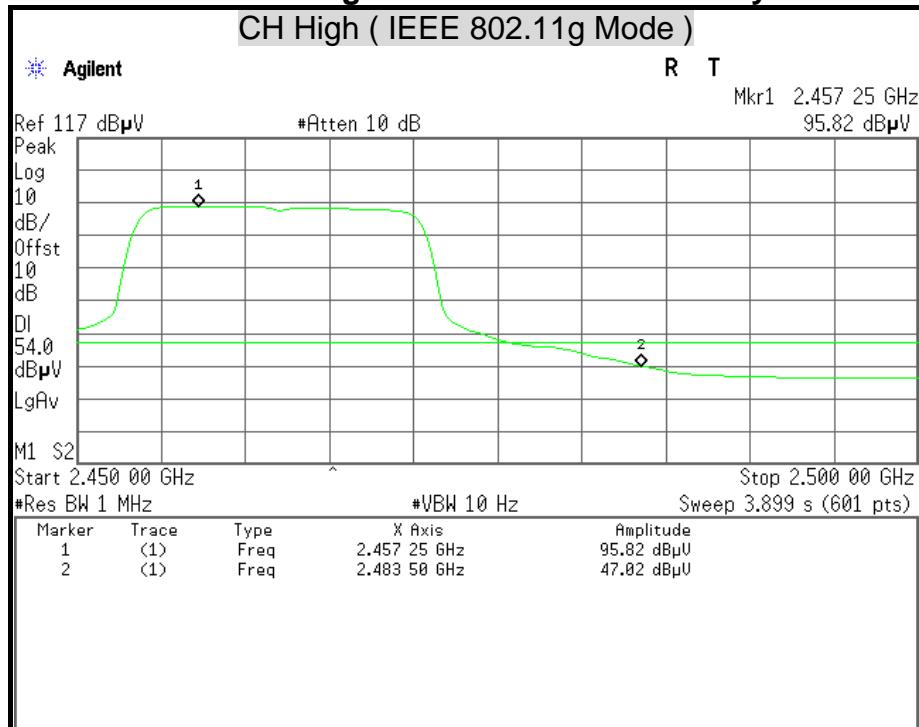**Detector Mode : Peak****Polarity : Vertical****Detector Mode : Average****Polarity : Vertical**



## 7.7 CONDUCTED EMISSION

### LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5.00	56	46
5.00 - 30.0	60	50



### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/09/2012
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/14/2012
EMI Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/20/2012
Pulse Limit	ROHDE & SCHWARZ	ESH3-Z2	100117	09/14/2012

*Remark:* Each piece of equipment is scheduled for calibration once a year.



## TEST SETUP

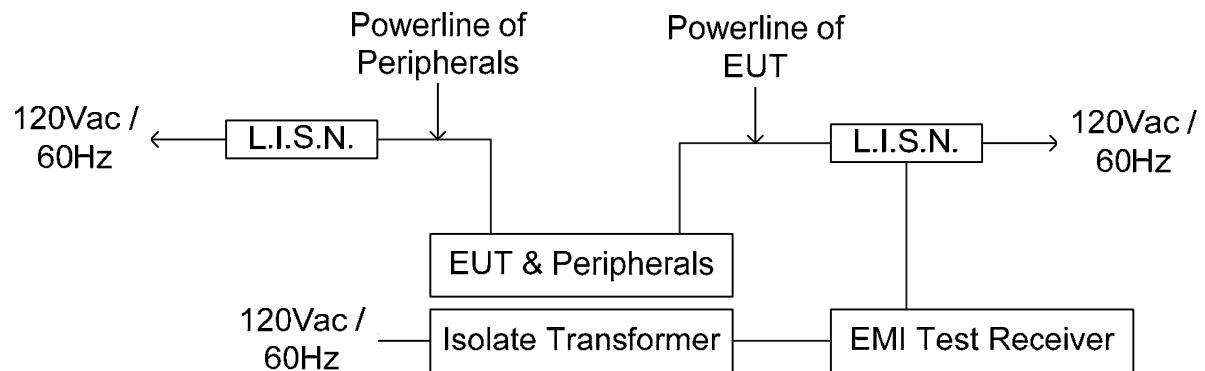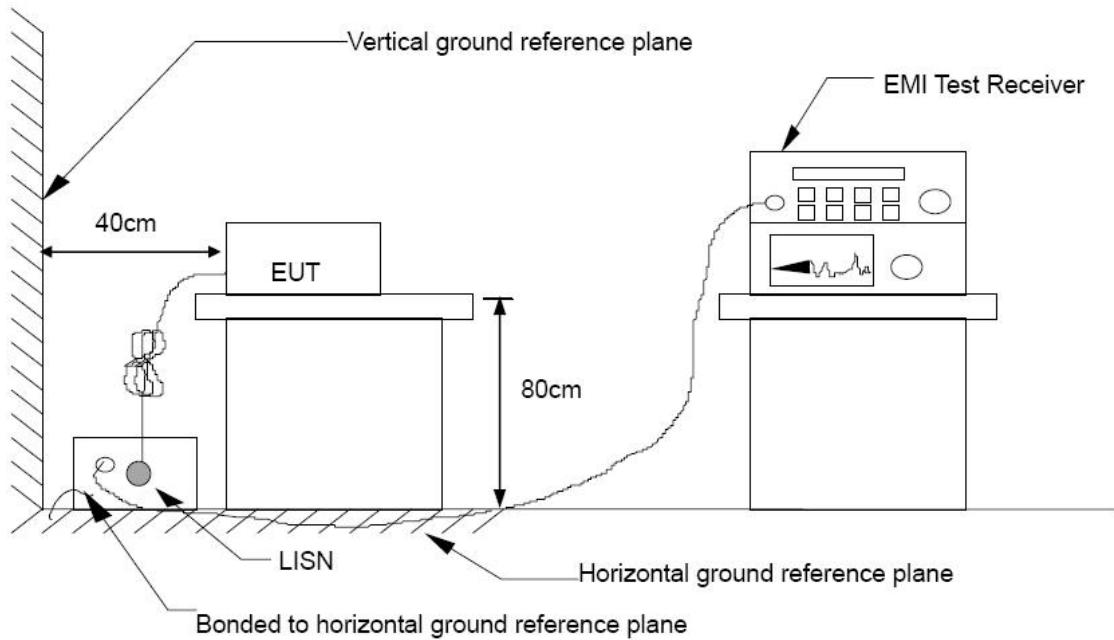



## **TEST PROCEDURE**

The basic test procedure was in accordance with ANSI C63.4:2003.

The test procedure is performed in a 4m x 3m x 2.4m (LxWxH) shielded room.

The EUT along with its peripherals were placed on a 1.0m (W) x 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.


The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

**TEST RESULTS**

<b>Product Name</b>	802.11 b/g WiFi Module Board	<b>Test By</b>	Bell Huang
<b>Test Model</b>	AXM22001-2A-C	<b>Test Date</b>	2011/11/02
<b>Test Mode</b>	Normal Operating	<b>TEMP &amp; Humidity</b>	24°C, 58%

LINE

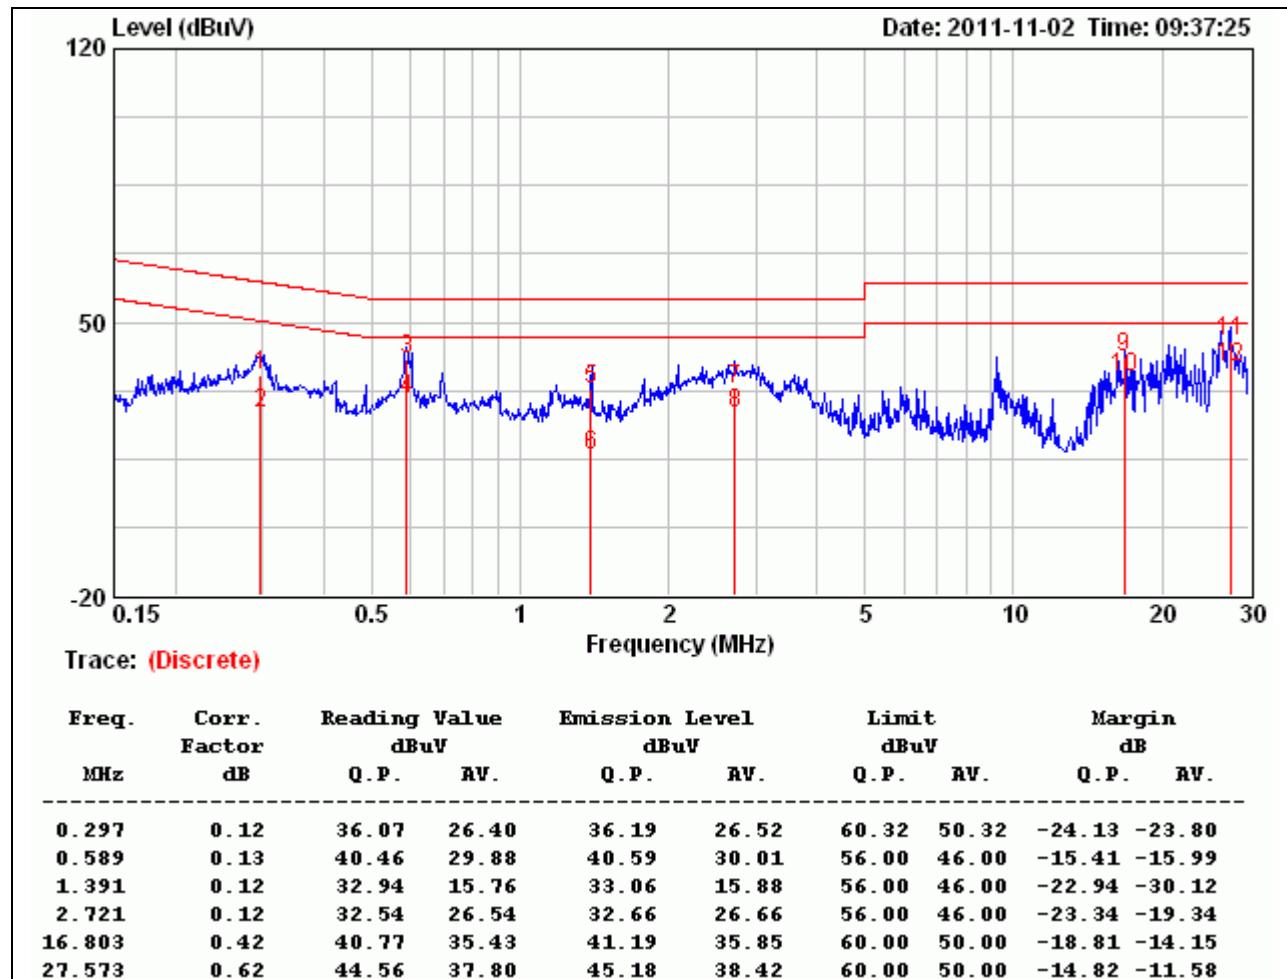
**Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	802.11 b/g WiFi Module Board	Test By	Bell Huang
Test Model	AXM22001-2A-C	Test Date	2011/11/02
Test Mode	Normal Operating	TEMP & Humidity	24°C, 58%

## NEUTRAL

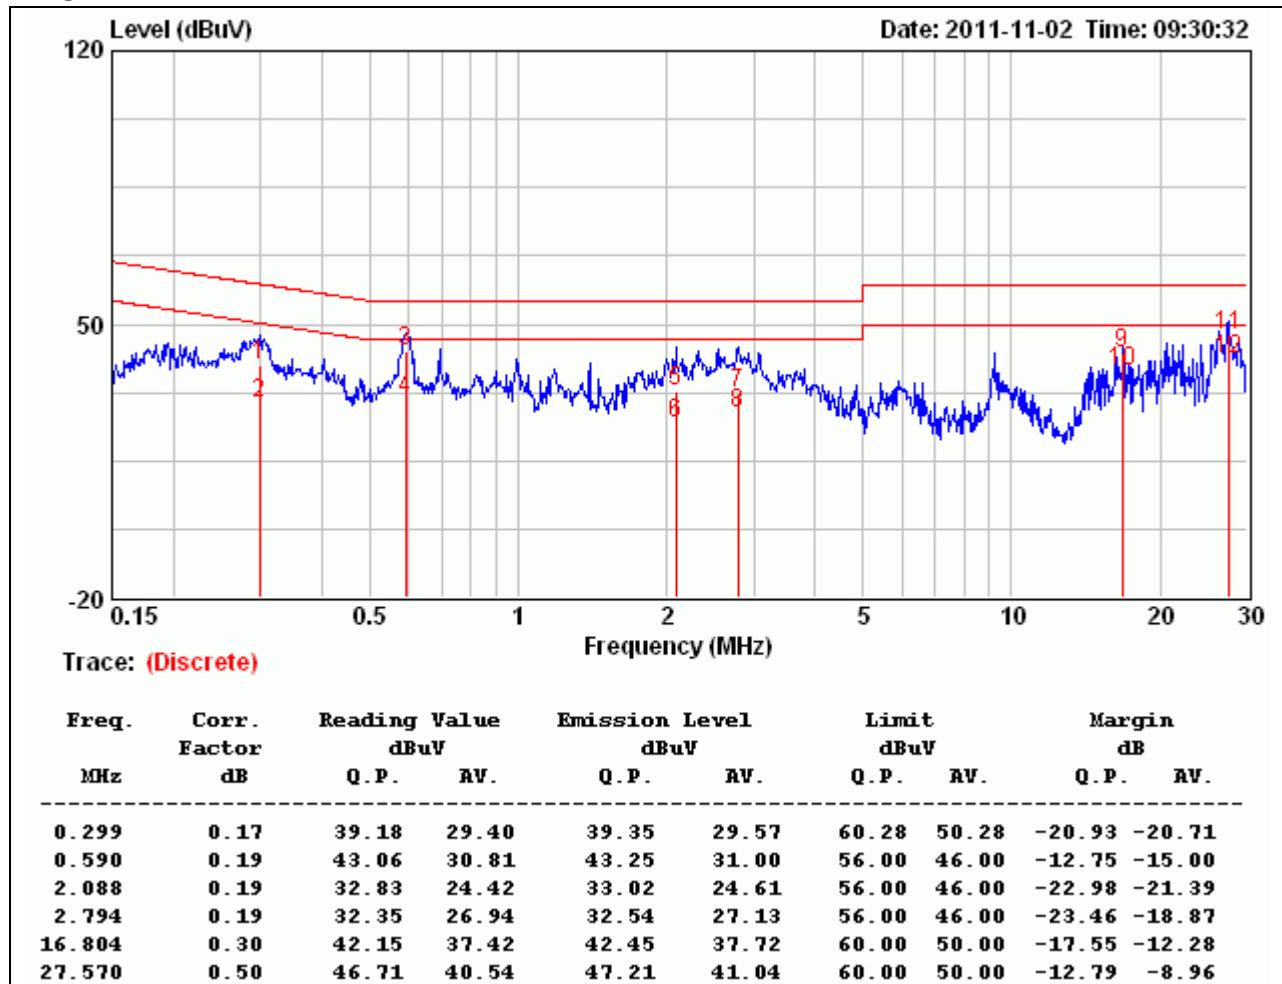

## Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



## APPENDIX I MAXIMUM PERMISSIBLE EXPOSURE

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b) LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

### CALCULATIONS

Given  $E = \frac{\sqrt{30 \times P \times G}}{d}$  &  $S = \frac{E^2}{3770}$

Where  $E$  = Field strength in Volts / meter

$P$  = Power in Watts

$G$  = Numeric antenna gain

$d$  = Distance in meters

$S$  = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$P$  (mW) =  $P$  (W) / 1000 and

$d$  (cm) =  $d$ (m) / 100

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

Where  $d$  = Distance in cm

$P$  = Power in mW

$G$  = Numeric antenna gain

$S$  = Power density in mW / cm<sup>2</sup>

**LIMIT**Power Density Limit,  $S=1.0\text{mW/cm}^2$ **TEST RESULTS**

Mode	Antenna Gain (dBi)	Minimum separation distance (cm)	Output Power (dBm)	Numeric antenna gain (mW)	Power Density Limit (mW/cm <sup>2</sup> )	Power Density at 20cm (mW/cm <sup>2</sup> )
IEEE 802.11b	1.45	20.0	19.04	1.40	1.00	0.022270
IEEE 802.11g	1.45	20.0	19.35	1.40	1.00	0.023918

**Remark:** For mobile or fixed location transmitters, the maximum power density is  $1.0\text{ mW/cm}^2$  even if the calculation indicates that the power density would be larger.