

**CFR 47 FCC PART 15 SUBPART C**

**TEST REPORT**

*For*

**Smart Battery Doorbell Camera**

**MODEL NUMBER: ER02201, MI-CW074-125W, ER01XXX-ER99XXX(XXX is 001~999)**

**REPORT NUMBER: E04A24020145F01002**

**ISSUE DATE: March 18, 2024**

**FCC ID: Z63-ER02201**

*Prepared for*

**SHENZHEN AONI ELECTRONIC CO., LTD**  
**No.5,Bldg.,Honghui Industrial Park,2nd Liuxian Road,Xin'An streets, Bao'an**  
**District,ShenZhen,China**

*Prepared by*

**Guangdong Global Testing Technology Co., Ltd.**

**Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park,**  
**Dongguan city, Guangdong, People's Republic of China, 523808**

**This report is based on a single evaluation of the submitted sample(s) of the above mentioned Product, it does not imply an assessment of the production of the products.**

**This report shall not be reproduced, except in full, without the written approval of Guangdong Global Testing Technology Co., Ltd.**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
<u>V0</u>	<u>March 18, 2024</u>	<u>Initial Issue</u>	<u></u>

### Summary of Test Results

Test Item	Limit/Requirement	Result
Antenna Requirement	FCC Part 15.203	Pass
AC Power Line Conducted Emission	FCC Part 15.207	Pass
20dB Bandwidth	FCC Part 15.231(c)	Pass
Transmission Time	FCC Part 15.231(a)	Pass
Radiated Emission	FCC Part 15.205/15.209 FCC Part 15.231(b)	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C> when <Accuracy Method> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>5</b>
<b>2. TEST METHODOLOGY</b> .....	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	7
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	7
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>8</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	8
5.2. <i>CHANNEL LIST</i> .....	8
5.3. <i>MAX FIELD STRENGTH</i> .....	8
5.4. <i>TEST CHANNEL CONFIGURATION</i> .....	9
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	9
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	9
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i> .....	9
5.8. <i>SETUP DIAGRAM</i> .....	10
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED</b> .....	<b>11</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>13</b>
7.1. <i>ON TIME AND DUTY CYCLE</i> .....	13
7.2. <i>20DB BANDWIDTH</i> .....	15
7.3. <i>TRANSMISSION TIME</i> .....	17
<b>8. RADIATED TEST RESULTS</b> .....	<b>19</b>
8.1. <i>RADIATED EMISSION</i> .....	24
<b>9. ANTENNA REQUIREMENT</b> .....	<b>30</b>
<b>10. AC POWER LINE CONDUCTED EMISSION</b> .....	<b>31</b>
<b>APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION</b> .....	<b>34</b>

# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: SHENZHEN AONI ELECTRONIC CO., LTD  
 Address: No.5,Bldg.,Honghui Industrial Park,2nd Liuxian Road,Xin'An streets, Bao'an District,ShenZhen,China

## Manufacturer Information

Company Name: SHENZHEN AONI ELECTRONIC CO., LTD  
 Address: No.5,Bldg.,Honghui Industrial Park,2nd Liuxian Road,Xin'An streets, Bao'an District,ShenZhen,China

## EUT Information

Product Description: Smart Battery Doorbell Camera  
 Model: ER02201, MI-CW074-125W, ER01XXX-ER99XXX(XXX is 001~999)  
 Brand: Merkury  
 Sample Received Date: March 12, 2024  
 Sample Status: Normal  
 Sample ID: A24020145 004  
 Date of Tested: March 12, 2024 to March 18, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:

*Jok Yang*

Jok Yang  
 Project Engineer

Approved By:

*Shawn Wen*

Shawn Wen  
 Laboratory Manager



Checked By:

*Alan He*

Alan He  
 Laboratory Leader

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 6947.01)</b> Guangdong Global Testing Technology Co., Ltd. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1343)</b> Guangdong Global Testing Technology Co., Ltd. has been recognized to perform compliance testing on equipment subject to Supplier's Declaration of Conformity (SDoC) and Certification rules</p> <p><b>ISED (Company No.: 30714)</b> Guangdong Global Testing Technology Co., Ltd. has been registered and fully described in a report filed with ISED. The Company Number is 30714 and the test lab Conformity Assessment Body Identifier (CABID) is CN0148.</p>
---------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Note: All tests measurement facilities use to collect the measurement data are located at Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city, Guangdong, People's Republic of China, 523808

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Items	k	Uncertainty
20dB Emission Bandwidth	1.96	±9.2 PPM
Conducted Output Power	1.96	±1.5 dB
Power Spectral Density Level	1.96	±1.9 dB
Conducted Spurious Emission	1.96	9 kHz-30 MHz: ± 0.95 dB 30 MHz-1 GHz: ± 1.5 dB 1GHz-12.75GHz: ± 1.8 dB 12.75 GHz-26.5 GHz: ± 2.1dB
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.		

Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions from the AC mains power ports (AMN)	150 kHz ~ 30 MHz	2	3.37
Radiated emissions	9 kHz ~ 30 MHz	2	4.16
Radiated emissions	30 MHz ~ 1 GHz	2	3.79
Radiated emissions	1 GHz ~ 18 GHz	2	5.62
Radiated emissions	18 GHz ~ 40 GHz	2	5.54
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.			

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name		Smart Battery Doorbell Camera
Model		ER02201
Series Model		MI-CW074-125W, ER01XXX-ER99XXX(XXX is 001~999)
Hardware Version		V1.1
Software Version		V3.2.24
Ratings		DC 5V / AC 12V-24V /Battery 3.7V
Battery Ratings		FXN 44 18650 3.7V 4400mAh 16.28Wh
Power Supply	AC	24V
	DC	5V
	Battery	3.7V

Frequency Band:	433.92 MHz
Frequency Range:	433.92 MHz
Type of Modulation:	ASK/OOK
Number of Channels:	1
Max field strength:	38.22 dB $\mu$ V/m
Antenna Type:	Internal antenna
Antenna Gain:	-20.02 dBi
EUT Test software:	/
Note:	The Antenna Gain was provided by customer, and this information may affect the validity of the results, customer should be responsible for this.

### 5.2. CHANNEL LIST

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	433.92	/	/	/	/	/	/

### 5.3. MAX FIELD STRENGTH

Frequency (MHz)	Channel Number	Max field strength (dB $\mu$ V/m)
433.92	1	38.22



**5.4. TEST CHANNEL CONFIGURATION**

Test Channel Number	Frequency
CH 1	433.92 MHz

**5.5. THE WORSE CASE POWER SETTING PARAMETER**

The Worse Case Power Setting Parameter			
Test Software		/	
Modulation Mode	Transmit Antenna Number	Test Channel	
		CH 1	
ASK/OOK	1	Default	

**5.6. DESCRIPTION OF AVAILABLE ANTENNAS**

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	433.92	Internal antenna	-20.02

Test Mode	Transmit and Receive Mode	Description
ASK/OOK	<input checked="" type="checkbox"/> 1TX	ANT 1 can be used as transmitting antenna.


Note: The value of the antenna gain was declared by customer.

**5.7. SUPPORT UNITS FOR SYSTEM TEST**

Equipment	Manufacturer	Model No.
Adapter	Lulian	CD170

## 5.8. SETUP DIAGRAM


AC conducted emission :



Radiated Emission:



RF conducted:



## 6. MEASURING EQUIPMENT AND SOFTWARE USED

Test Equipment of Conducted RF					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40	102257	2023/09/18	2024/09/17
Spectrum Analyzer	KEYSIGHT	N9020A	MY51285127	2023/09/18	2024/09/17
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY61253075	2023/09/18	2024/09/17
Vector Signal Generator	Rohde & Schwarz	SMM100A	101899	2023/09/18	2024/09/17
RF Control box	MWRF-test	MW100-RFCB	MW220926GTG	2023/09/18	2024/09/17
Wideband Radio Communication Tester	Rohde & Schwarz	CMW270	102792	2023/09/18	2024/09/17
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	103235	2023/09/18	2024/09/17
temperature humidity chamber	Espec	SH-241	SH-241-2014	2023/09/18	2024/09/17
RF Test Software	MWRF-test	MTS8310E (Ver. V2/0)	N/A	N/A	N/A

Test Equipment of Radiated emissions below 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2146	2022/08/30	2025/08/29
EMI Test Receiver	Rohde & Schwarz	ESCI3	101409	2023/09/18	2024/09/17
Spectrum Analyzer	KEYSIGHT	N9020A	MY51283932	2023/09/18	2024/09/17
Pre-Amplifier	HzEMC	HPA-9K0130	HYP A21001	2023/09/18	2024/09/17
Biconilog Antenna	Schwarzbeck	VULB 9168	01315	2022/10/10	2025/10/09
Biconilog Antenna	ETS	3142E	00243646	2022/03/23	2025/03/22
Loop Antenna	ETS	6502	243668	2022/03/30	2025/03/29
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE)	N/A	N/A	N/A

Test Equipment of Radiated emissions above 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2149	2022/08/30	2025/08/29
Spectrum Analyzer	Rohde & Schwarz	FSV40	101413	2023/09/18	2024/09/17
Spectrum Analyzer	KEYSIGHT	N9020A	MY51283932	2023/09/18	2024/09/17
Pre-Amplifier	A-INFO	HPA-1G1850	HYP A21003	2023/09/18	2024/09/17

Horn antenna	A-INFO	3117	246069	2022/03/11	2025/03/10
Pre-Amplifier	ZKJC	HPA-184057	HYP A21004	2023/09/18	2024/09/17
Horn antenna	ZKJC	3116C	246265	2022/03/29	2025/03/28
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE+)	N/A	N/A	N/A

Test Equipment of Conducted emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Shielded Room	CHENG YU	8m*5m*4m	N/A	2022/10/29	2025/10/28
EMI Test Receiver	Rohde & Schwarz	ESR3	102647	2023/09/18	2024/09/17
LISN/AMN	Rohde & Schwarz	ENV216	102843	2023/09/18	2024/09/17
NNLK 8129 RC	Schwarzbeck	NNLK 8129 RC	5046	2023/09/18	2024/09/17
Test Software	Farad	EZ-EMC (Ver. EMC-con-3A1 1+)	N/A	N/A	N/A

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	52%
Atmosphere Pressure	101kPa		

#### TEST RESULTS

433.92MHz

On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
21.9	100	0.219	21.9	-13.19	0.05	1



Note:

Duty Cycle Correction Factor=20log(x).

Where: x is Duty Cycle (Linear)

Where: T is On Time (transmitting duration)

If that calculated VBW is not available on the analyzer then the next higher value should be used.

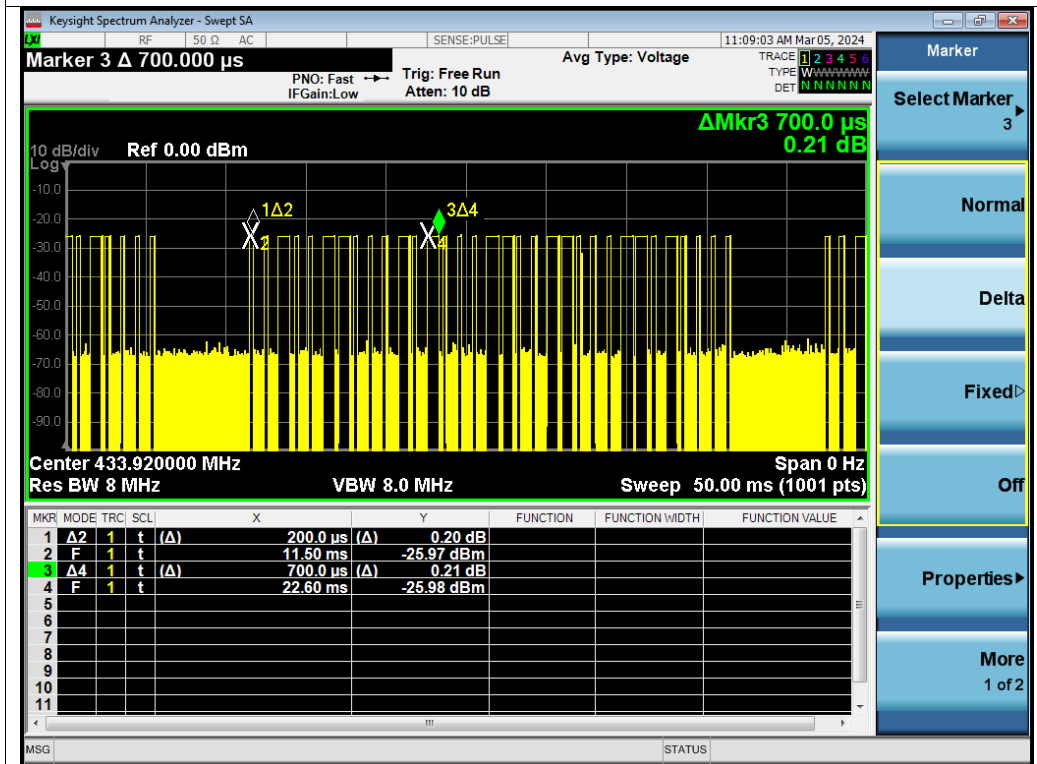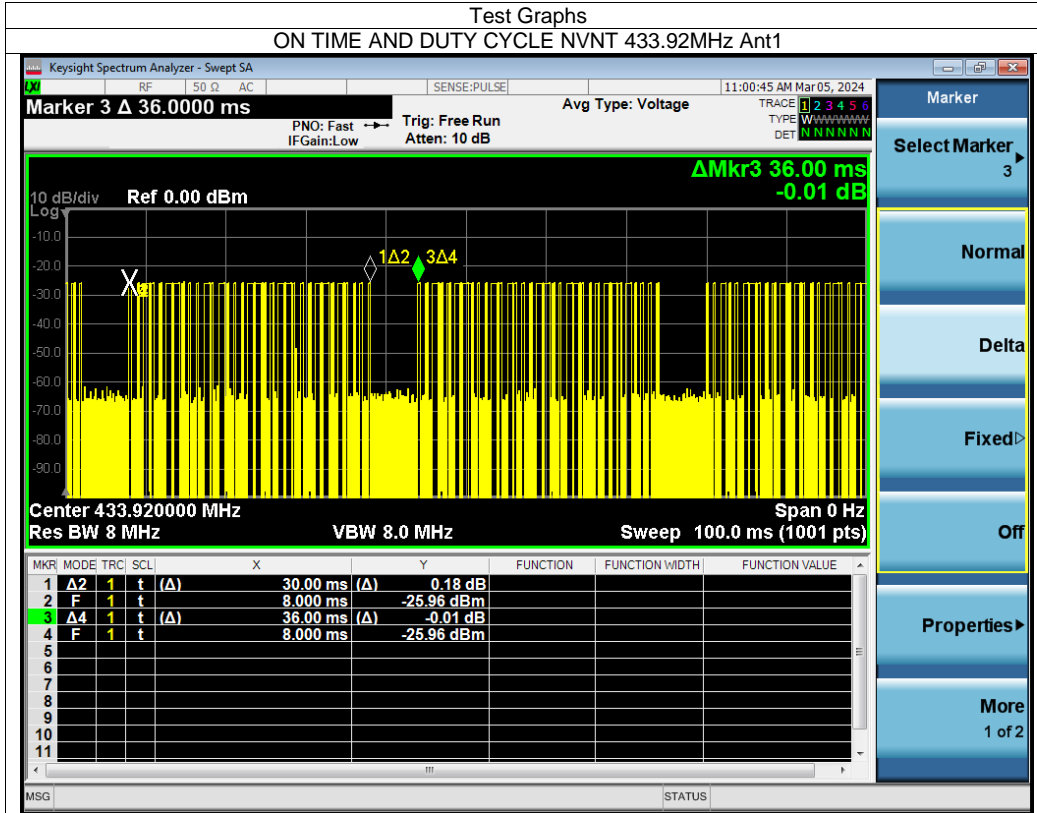

## 7.2. 20DB BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.231) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.231(a)(2)	20 dB Bandwidth	$\leq 1084.8$ kHz	433.92


### TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	Approximately 2 to 3 times the 20dB bandwidth
Detector	Peak
RBW	1 % to 5 % of the 20 dB bandwidth
VBW	approximately $3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 20 dB Bandwidth.

### TEST SETUP




### TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	52%
Atmosphere Pressure	101kPa		

### TEST RESULTS

Frequency (MHz)	20dB bandwidth (kHz)	Limit (kHz)	Result
433.92	18.36	≤ 1084.8	Pass

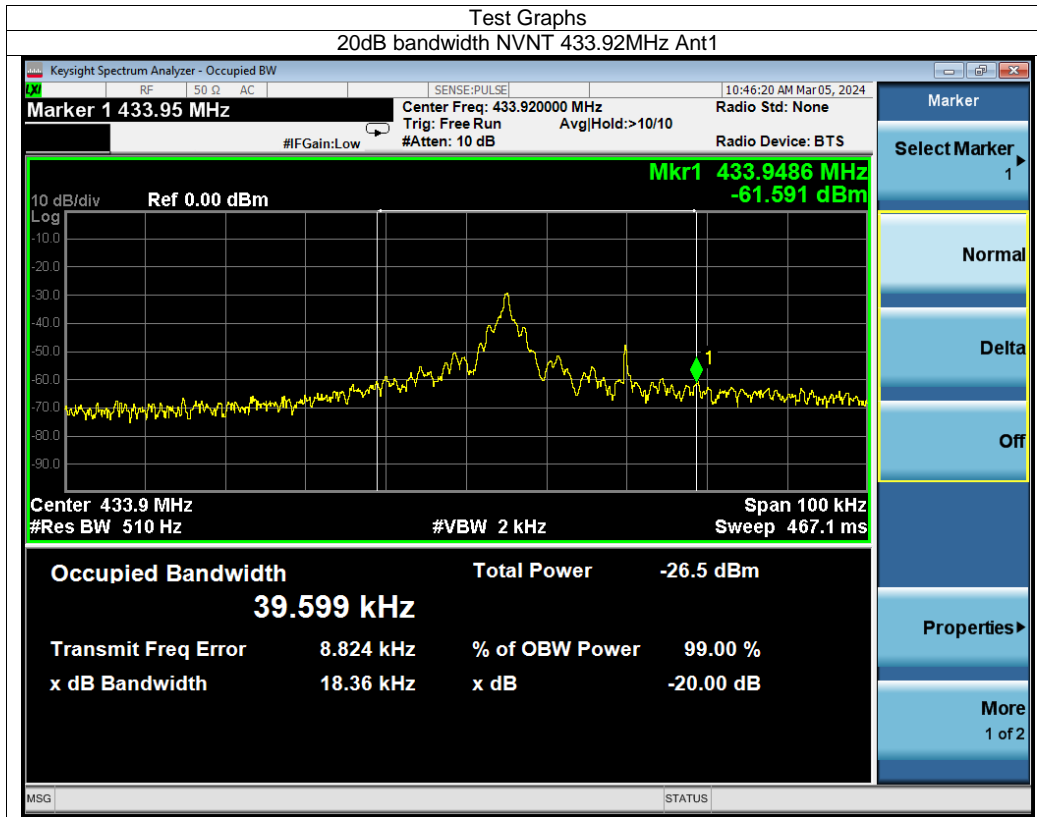



### 7.3. TRANSMISSION TIME

#### LIMITS

CFR 47 FCC Part15 (15.231) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (a)	Transmission Time	A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.


#### TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	8MHz
VBW	8MHz
Span	0Hz
Sweep time	Auto couple

Allow trace to fully stabilize and record value.

#### TEST SETUP




#### TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	55%
Atmosphere Pressure	101kPa		

**TEST RESULTS**

Frequency (MHz)	TRANSMISSION TIME (s)	Limit (s)	Result
433.92	0.344	≤5	Pass

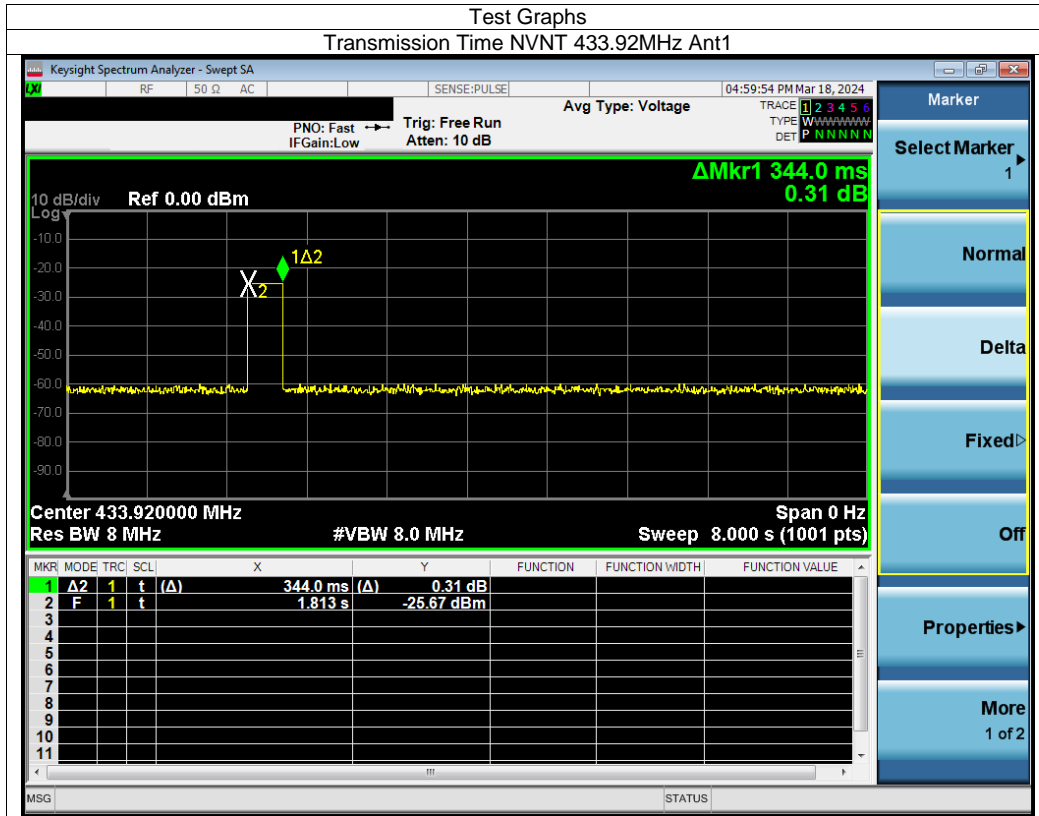

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.231(b)

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

Note: 1. Linear interpolations.

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

**TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1G

The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold


1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.


X axis, Y axis, Z axis positions:

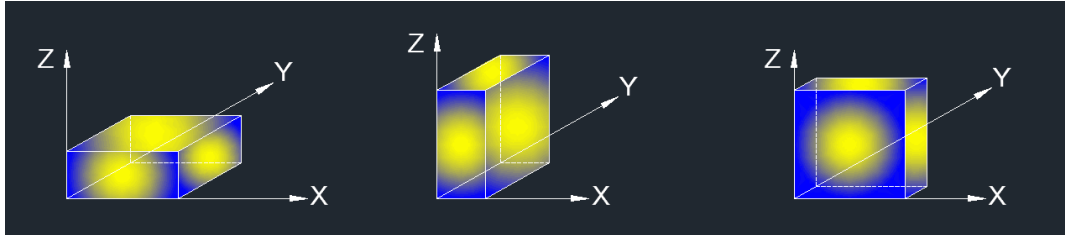

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

### TEST SETUP

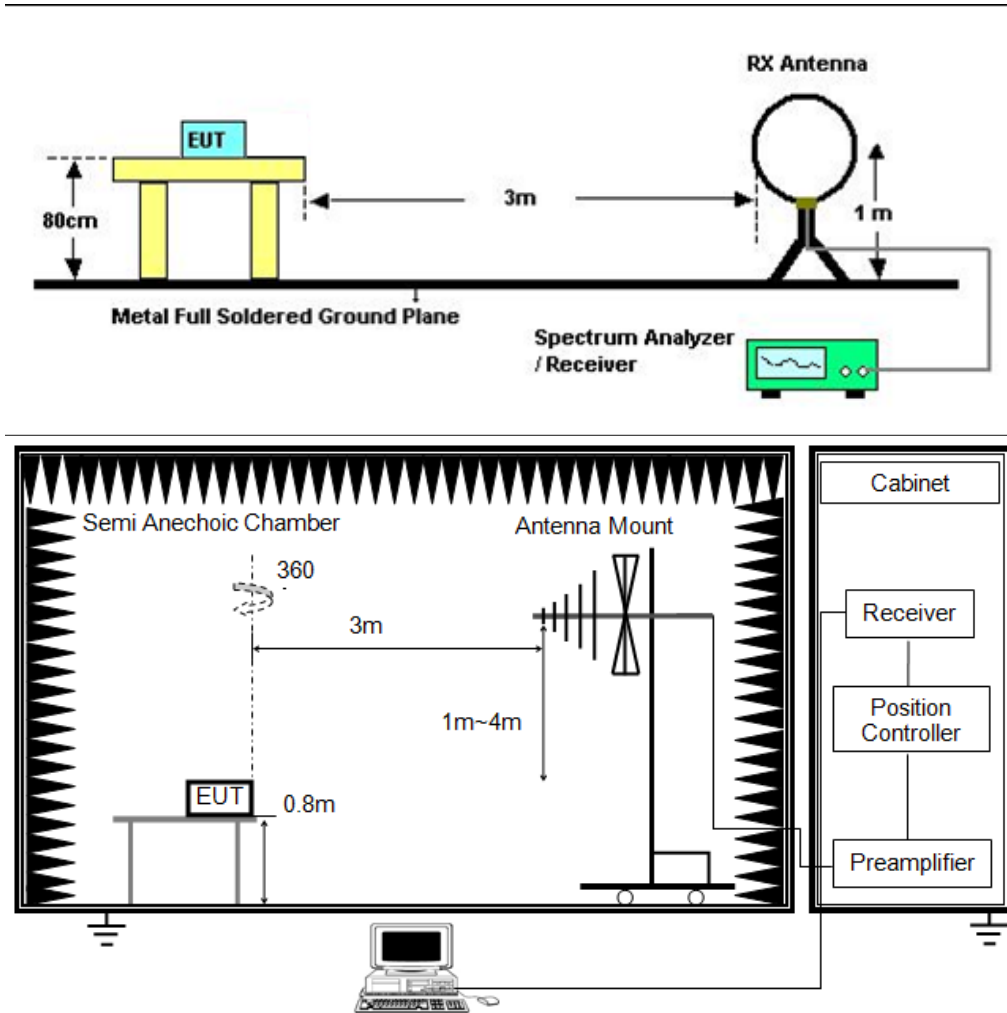

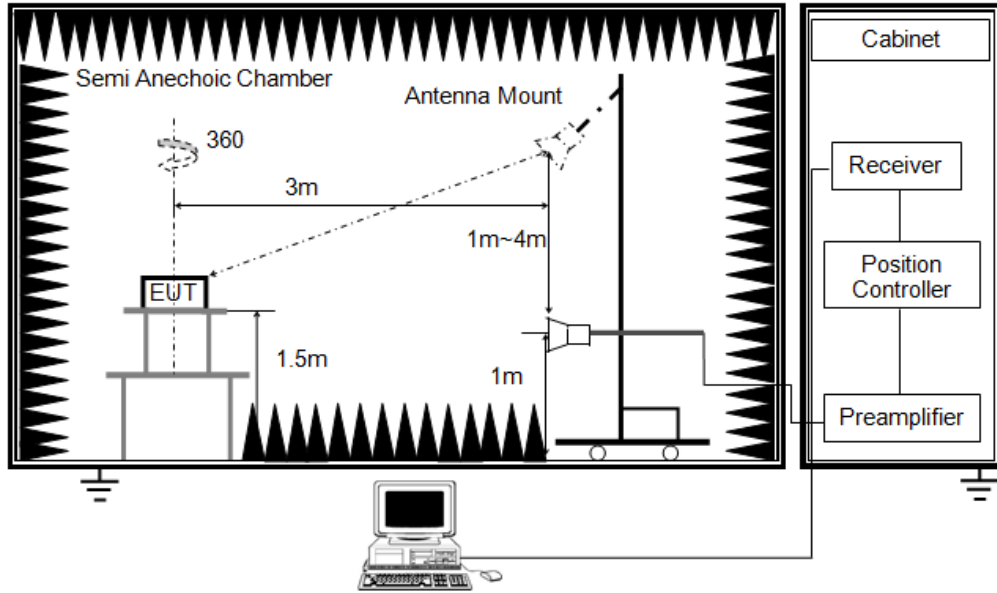

**TEST ENVIRONMENT**

Temperature	24.3°C	Relative Humidity	54%
Atmosphere Pressure	101kPa		


**TEST RESULTS**

Please refer to section 8.1.

## 8.1. RADIATED EMISSION

### Field Strength of fundamental frequency

Mode:	433.92MHz
Power:	DC 3.7V
TE:	Berny
Date	2024/3/16
T/A/P	24.3°C/54%/101Kpa

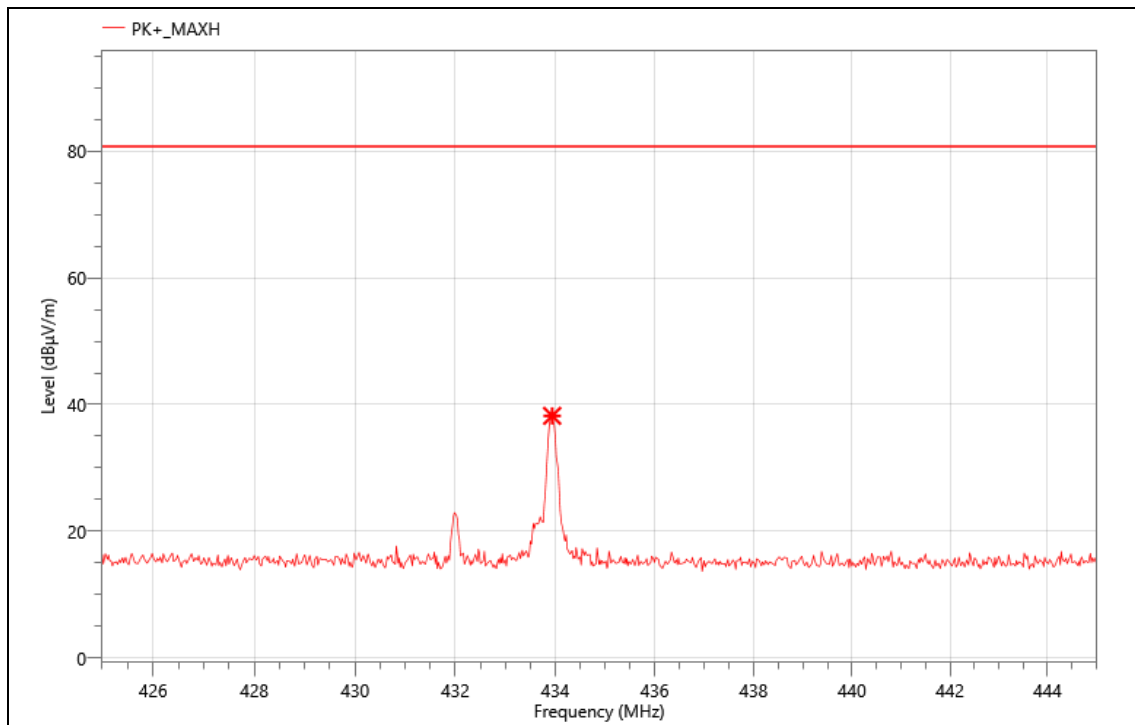


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	433.940	52.42	-14.2	38.22	80.83	42.61	QP	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]



Mode:	433.92MHz
Power:	DC 3.7V
TE:	Berny
Date	2024/3/16
T/A/P	24.3°C/54%/101Kpa

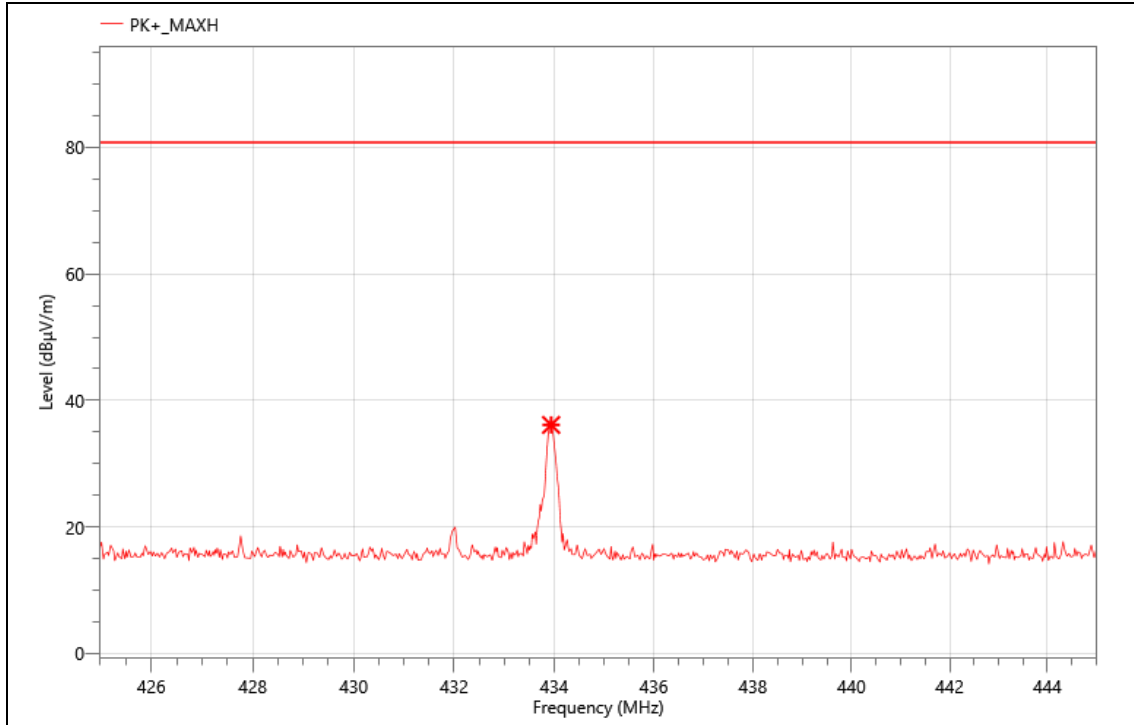

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	433.940	50.33	-14.2	36.13	80.83	44.70	QP	V


Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr. ]

Note:

1. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### Radiated Spurious Emission

Mode:	433.92MHz
Power:	DC 3.7V
TE:	Berny
Date	2024/3/16
T/A/P	24.3°C/54%/101Kpa

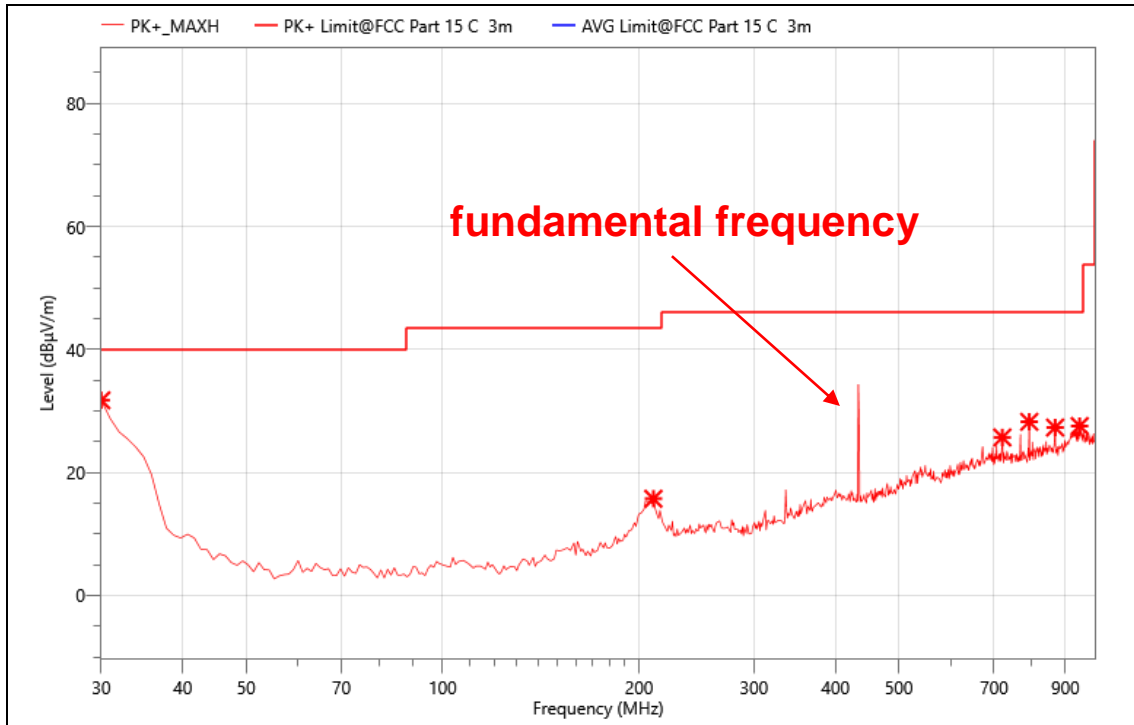


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	30.000	46.01	-14.27	31.74	40.00	8.26	PK+	V
2	210.420	36.99	-21.26	15.73	43.50	27.77	PK+	V
3	720.640	32.64	-6.94	25.70	46.00	20.30	PK+	V
4	792.420	34.86	-6.62	28.24	46.00	17.76	PK+	V
5	868.080	32.80	-5.49	27.31	46.00	18.69	PK+	V
6	946.650	30.90	-3.34	27.56	46.00	18.44	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	433.92MHz
Power:	DC 3.7V
TE:	Berny
Date	2024/3/16
T/A/P	24.3°C/54%/101Kpa

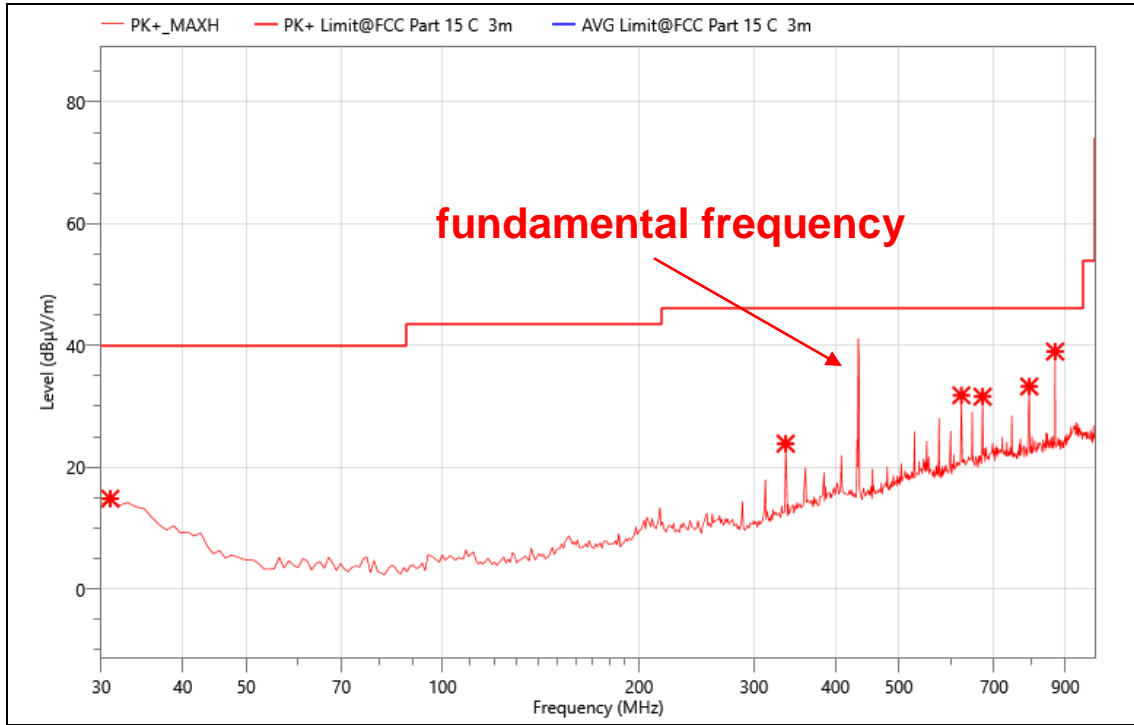


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	30.970	29.62	-14.8	14.82	40.00	25.18	PK+	H
2	335.550	40.97	-17.11	23.86	46.00	22.14	PK+	H
3	623.640	41.01	-9.2	31.81	46.00	14.19	PK+	H
4	672.140	39.56	-7.98	31.58	46.00	14.42	PK+	H
5	792.420	39.87	-6.62	33.25	46.00	12.75	PK+	H
6	868.080	44.49	-5.49	39.00	46.00	7.00	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr. ]

Mode:	433.92MHz
Power:	DC 3.7V
TE:	Berny
Date	2024/3/16
T/A/P	24.3°C/54%/101Kpa

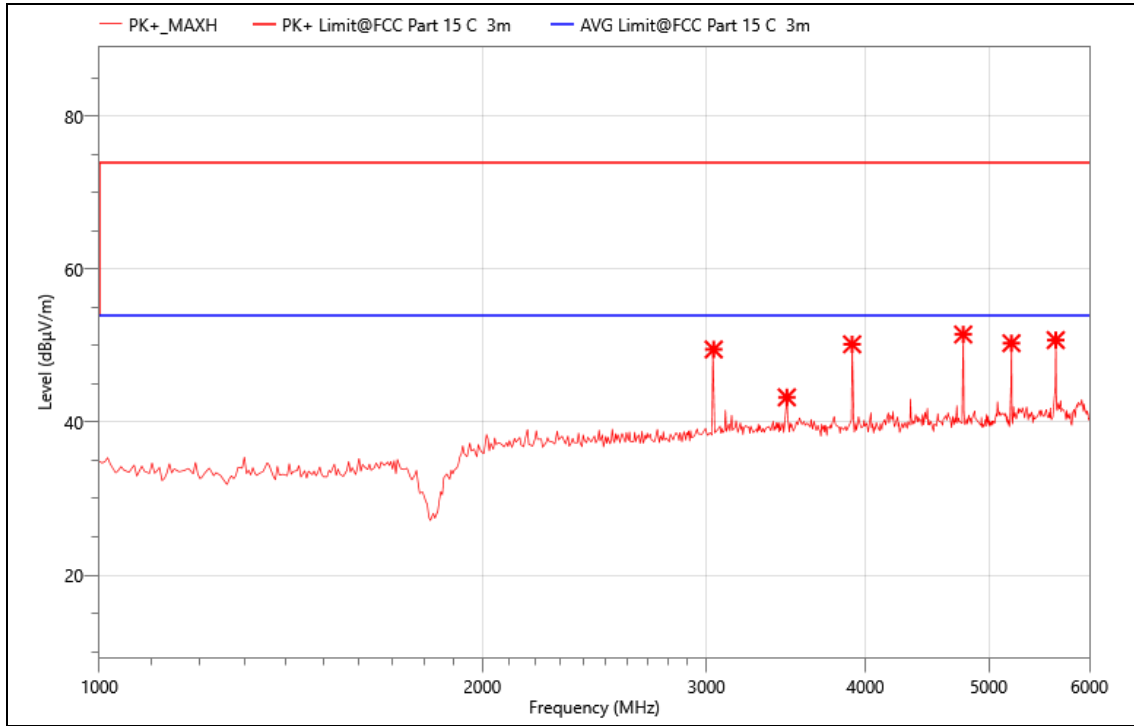


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	3040.000	65.08	-15.58	49.50	74.00	24.50	PK+	H
2	3470.000	57.58	-14.34	43.24	74.00	30.76	PK+	H
3	3905.000	63.49	-13.32	50.17	74.00	23.83	PK+	H
4	4775.000	62.98	-11.52	51.46	74.00	22.54	PK+	H
5	5210.000	60.92	-10.6	50.32	74.00	23.68	PK+	H
6	5645.000	59.37	-8.65	50.72	74.00	23.28	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr. ]

Mode:	433.92MHz
Power:	DC 3.7V
TE:	Berny
Date	2024/3/16
T/A/P	24.3°C/54%/101Kpa

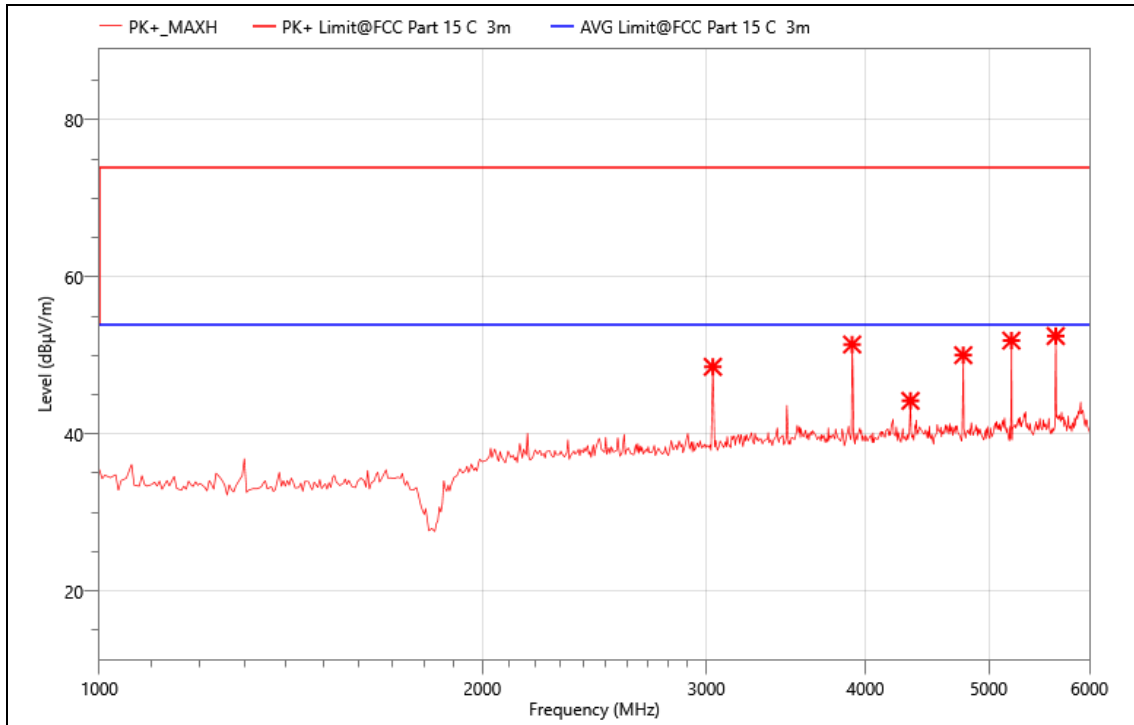

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	3035.000	64.07	-15.53	48.54	74.00	25.46	PK+	V
2	3905.000	64.71	-13.32	51.39	74.00	22.61	PK+	V
3	4340.000	56.48	-12.27	44.21	74.00	29.79	PK+	V
4	4775.000	61.55	-11.52	50.03	74.00	23.97	PK+	V
5	5210.000	62.48	-10.6	51.88	74.00	22.12	PK+	V
6	5645.000	61.11	-8.65	52.46	74.00	21.54	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr. ]

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

## **9. ANTENNA REQUIREMENT**

### **REQUIREMENT**

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **DESCRIPTION**

Pass

## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a)


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


### TEST SETUP

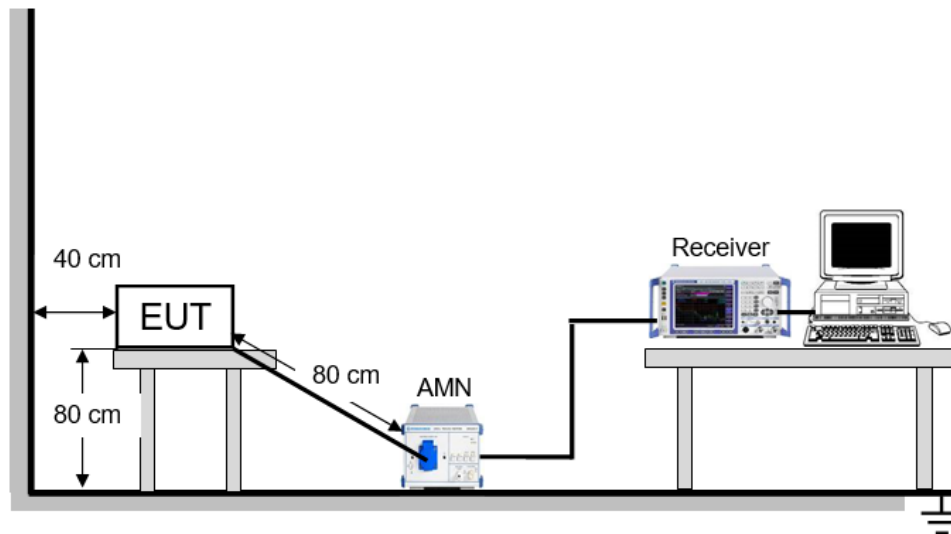

### TEST ENVIRONMENT

Temperature	26°C	Relative Humidity	54%
Atmosphere Pressure	101kPa		

**TEST RESULTS**

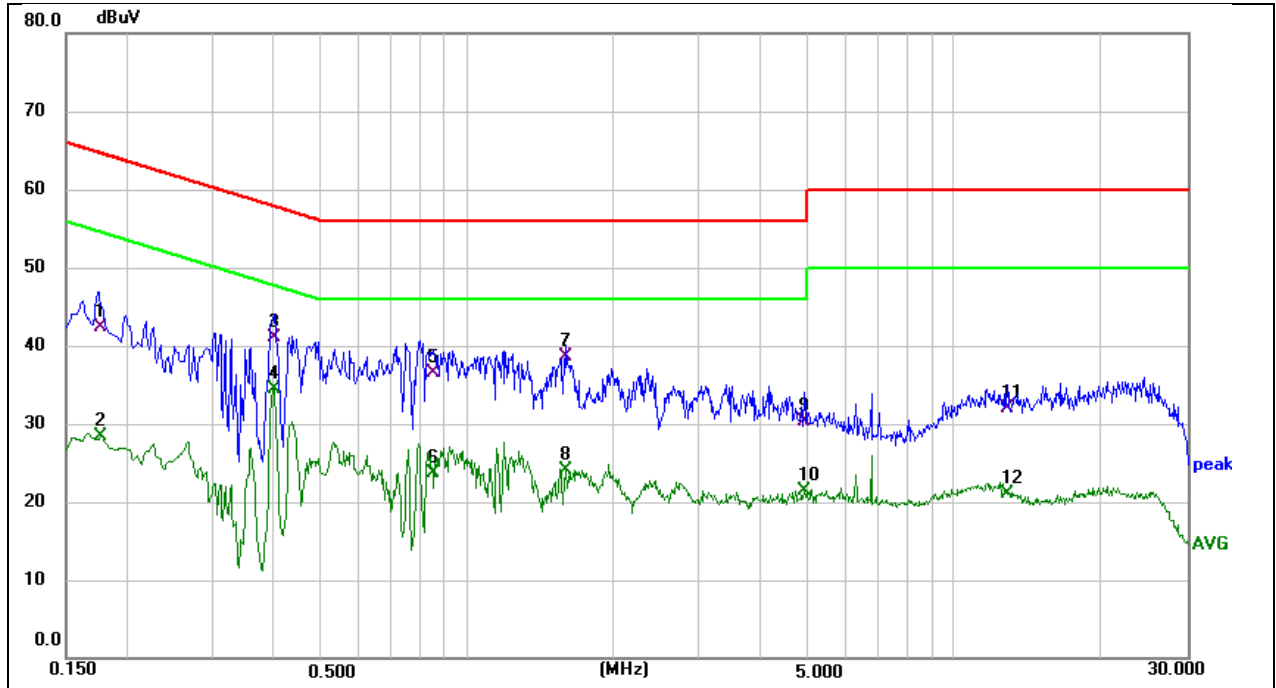


Phase: N

Mode: 433.92MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1767	32.14	10.16	42.30	64.64	-22.34	QP
2	0.1767	18.18	10.16	28.34	54.64	-26.30	AVG
3	0.4020	30.23	10.87	41.10	57.81	-16.71	QP
4	0.4020	23.61	10.87	34.48	47.81	-13.33	AVG
5	0.8500	26.72	9.88	36.60	56.00	-19.40	QP
6	0.8500	13.82	9.88	23.70	46.00	-22.30	AVG
7	1.5940	28.37	10.13	38.50	56.00	-17.50	QP
8	1.5940	14.00	10.13	24.13	46.00	-21.87	AVG
9	4.9020	19.88	10.42	30.30	56.00	-25.70	QP
10	4.9020	10.93	10.42	21.35	46.00	-24.65	AVG
11	12.7980	32.07	-0.17	31.90	60.00	-28.10	QP
12	12.7980	21.26	-0.17	21.09	50.00	-28.91	AVG



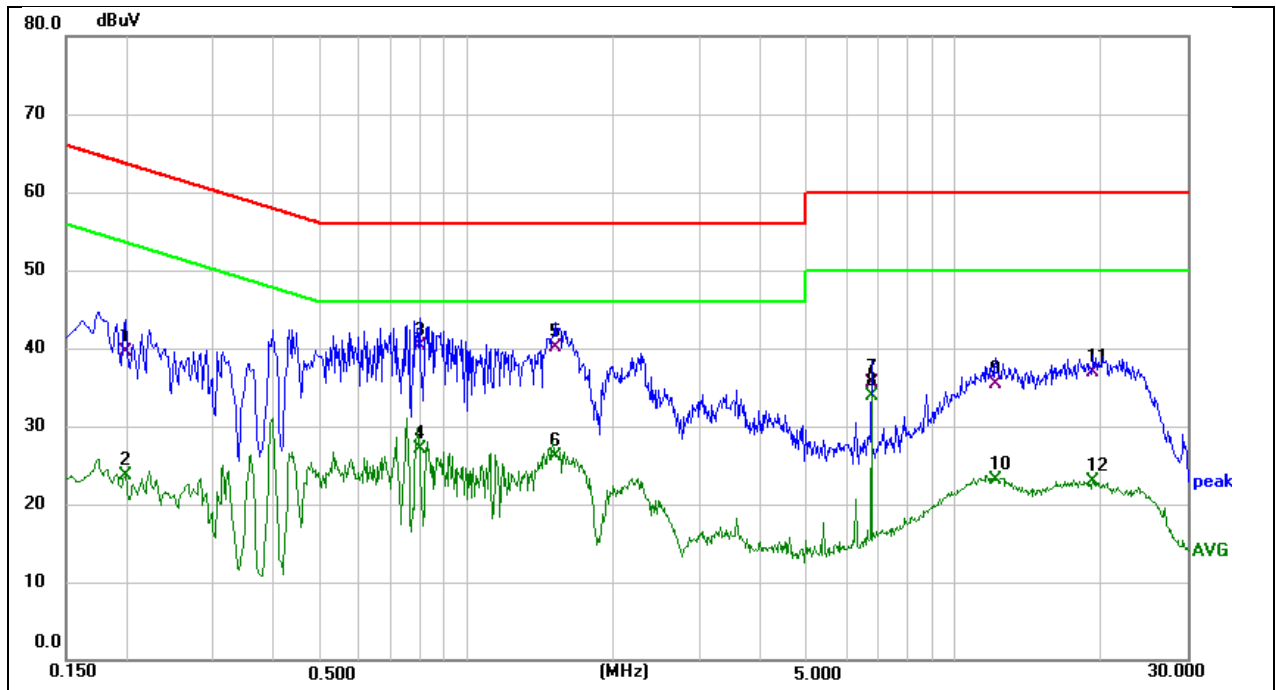

Phase: L1	Mode: 433.92MHz
-----------	-----------------

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1980	29.10	10.50	39.60	63.69	-24.09	QP
2	0.1980	13.22	10.50	23.72	53.69	-29.97	AVG
3	0.7980	28.51	11.79	40.30	56.00	-15.70	QP
4	0.7980	15.29	11.79	27.08	46.00	-18.92	AVG
5	1.5180	30.21	9.89	40.10	56.00	-15.90	QP
6	1.5180	16.21	9.89	26.10	46.00	-19.90	AVG
7	6.7460	24.50	11.00	35.50	60.00	-24.50	QP
8	6.7460	22.96	11.00	33.96	50.00	-16.04	AVG
9	12.1740	35.13	0.27	35.40	60.00	-24.60	QP
10	12.1740	22.81	0.27	23.08	50.00	-26.92	AVG
11	19.3140	22.00	14.80	36.80	60.00	-23.20	QP
12	19.3140	8.18	14.80	22.98	50.00	-27.02	AVG

Note: 1. Result = Reading + Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.


Note: All the modes have been tested, only the worst data was recorded in the report.


## APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION

### AC Power Line Conducted Emission



### Radiated Emission

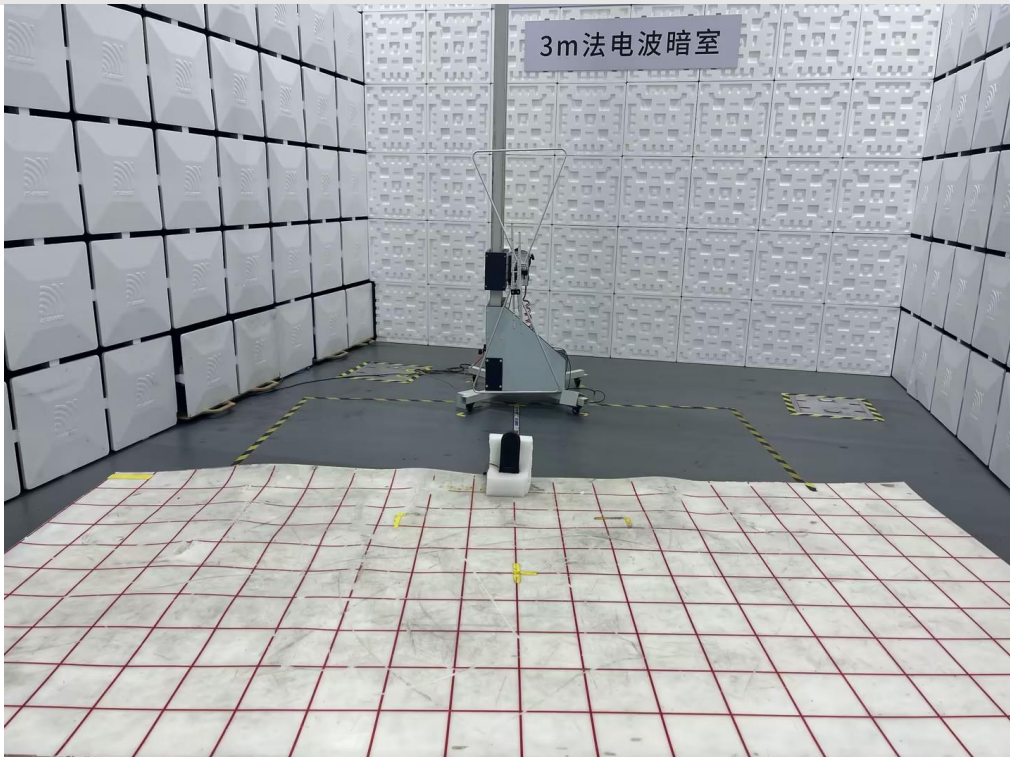

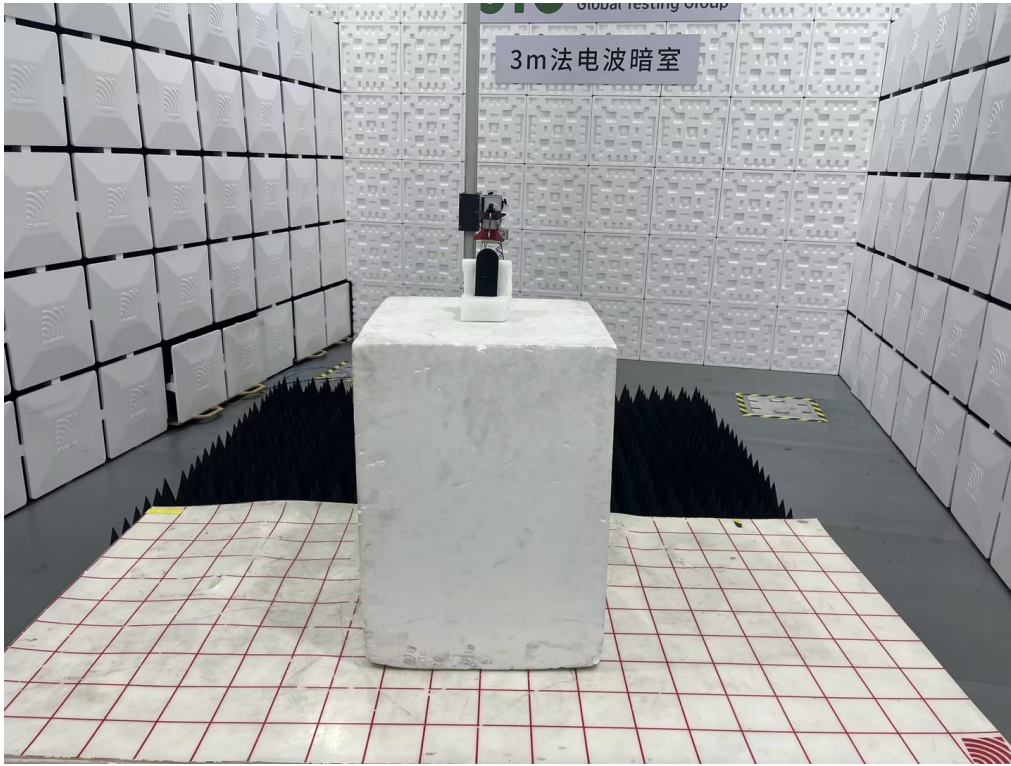

**END OF REPORT**