

FCC Test Report

Report No.: AGC13779231202FR03

FCC ID	:	Z63-HOLA98PRO
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Mechanical Keyboard
BRAND NAME	:	AUSDOM
MODEL NAME	:	Hola 98 Pro, Hola75, Hola84, Hola87, Hola87 pro, Hola96, Hola96 pro, Hola104, Hola104 pro, Hola108, Hola108 pro
APPLICANT	:	SHENZHEN AONI ELECTRONIC CO., LTD
DATE OF ISSUE	:	Feb. 03, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Feb. 03, 2024	Valid	Initial Release	



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	
2.2 Test Frequency List	7
2.3 Related Submittal(S) / Grant (S)	
2.4 Test Methodology	
2.5 Special Accessories	
2.6 Equipment Modifications	
2.7 Antenna Requirement	
3. Test Environment	9
3.1 Address of the Test Laboratory	9
3.2 Test Facility	9
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Use	11
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	
	~~



10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	
12.1 Measurement Limit	
12.2 Measurement Setup (Block Diagram of Configuration)	
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Measurement Results	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



1. General Information

Applicant	SHENZHEN AONI ELECTRONIC CO., LTD
Address	No.5, Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China
Manufacturer	SHENZHEN AONI ELECTRONIC CO., LTD
Address	No.5, Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China
Factory	SHENZHEN AONI ELECTRONIC CO., LTD
Address	No.5, Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China
Product Designation	Wireless Mechanical Keyboard
Brand Name	AUSDOM
Test Model	Hola 98 Pro
Series Model(s)	Hola75, Hola84, Hola87, Hola87 pro, Hola96, Hola96 pro, Hola104, Hola104 pro, Hola108, Hola108 pro
Difference Description	All the series models are the same as the test model except for the model names.
Date of receipt of test item	Dec. 27, 2023
Date of Test	Dec. 27, 2023 to Feb. 03, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-2.4G-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

an Duan

Alan Duan (Project Engineer)

Feb. 03, 2024

Reviewed By

vin Lin

Calvin Liu (Reviewer)

Feb. 03, 2024

Approved By

ax tra

Max Zhang Authorized Officer

Feb. 03, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2479MHz
Modulation Type	GFSK
Number of channels	78
Channel Separation	1 MHz
Maximum Transmitter Power	3.497dBm
Hardware Version	V0.1
Software Version	V112
Antenna Designation	PCB Antenna
Antenna Gain	1.58dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter
Adapter Information	N/A



2.2 Test Frequency List

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	2402	28	2429	55	2456
2	2403	29	2430	56	2457
3	2404	30	2431	57	2458
4	2405	31	2432	58	2459
5	2406	32	2433	59	2460
6	2407	33	2434	60	2461
7	2408	34	2435	61	2462
8	2409	35	2436	62	2463
9	2410	36	2437	63	2464
10	2411	37	2438	64	2465
11	2412	38	2439	65	2466
12	2413	39	2440	66	2467
13	2414	40	2441	67	2468
14	2415	41	2442	68	2469
15	2416	42	2443	69	2470
16	2417	43	2444	70	2471
17	2418	44	2445	71	2472
18	2419	45	2446	72	2473
19	2420	46	2447	73	2474
20	2421	47	2448	74	2475
21	2422	48	2449	75	2476
22	2423	49	2450	76	2477
23	2424	50	2451	77	2478
24	2425	51	2452	78	2479
25	2426	52	2453		
26	2427	53	2454		
27	2428	54	2455		



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID:Z63-HOLA98PRO filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 1.58dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	U _c = ±3.9 dB
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



3.5 List of Equipment Use

RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
\square	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	

• A	AC Power Line Conducted Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08



• Te	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
	AGC-EM-S003	RE-Test System	FARA	EZ-EMC	VRA-03A		
\boxtimes	AGC-ER-S012	BT/WIFI-Test System	Tonscend	JS1120-2	2.6		
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	HW-200440C00	HUAWEI		

I Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	ID/Specification Information	Cable
1	Wireless Mechanical Keyboard	Hola 98 Pro	SHENZHEN AONI ELECTRONIC CO., LTD	Z63-HOLA98PRO	



4.5 Summary of Test Results

Item	FCC Rules	Description of Test Re	
1	§15.203&15.247(b)(4)	Antenna Equipment Pa	
2	§15.247 (b)(3)	RF Output Power Pas	
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density Pa	
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions P	
5	§15.209	Radiated Emission& Band Edge P	
6	§15.207	AC Power Line Conducted Emission Pa	



5. Description of Test Modes

Summary Table of Test Cases					
Data Rate / Modulation					
Test Item	2.4G mode –GFSK				
	Mode 1: 2.4G Tx CH1_2402 MHz (Battery powered or AC/DC adapter)				
Radiated & Conducted Test Cases	Mode 2: 2.4G Tx CH45_2446 MHz (Battery powered or AC/DC adapter)				
	Mode 3: 2.4G Tx CH78_2479 MHz (Battery powered or AC/DC adapter)				
AC Conducted Emission Mode 1: 2.4G mode+ Battery + USB Cable (Charging from AC Adapter)					
Note:	Note:				
1. Only the result of the	worst case was recorded in the report, if no other cases.				

- The battery is full-charged during the test.
- 2. 3. 4. 5. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- The EUT adjusts the frequency through the button.



6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
2.4G	240	0.03	15.23	4.17

Remark:

- 1. Duty Cycle factor = $10 \times \log(1/\text{Duty cycle})$
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

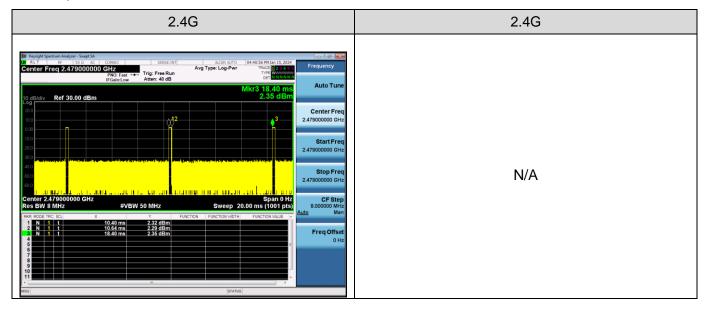



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW > DTS bandwidth
- 3. Set the VBW \geq [3 x RBW].
- 4. Span≥[3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

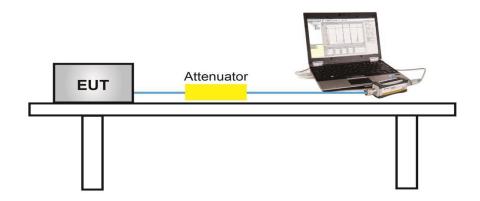



For peak power test setup

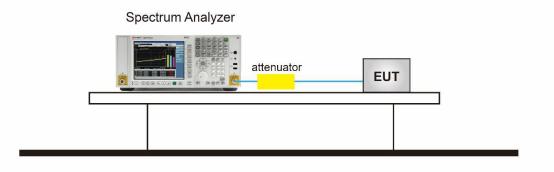


7.4 Measurement Result

Test Data of Conducted Output Power					
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	2.962	≤30	Pass	
GFSK	2446	3.497	≤30	Pass	
	2479	2.203	≤30	Pass	

Test Graphs of Conducted Output Power





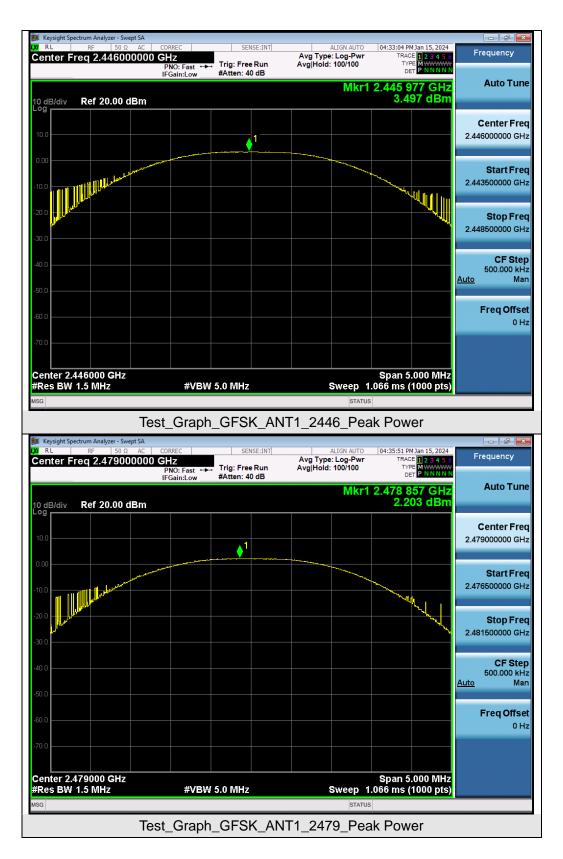



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.


8.3 Measurement Setup (Block Diagram of Configuration)

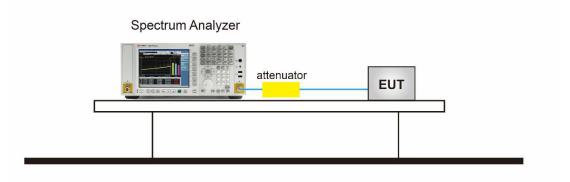




8.4 Measurement Results


Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail
	2402	1.020	0.652	≥0.5	Pass
GFSK	2446	1.018	0.645	≥0.5	Pass
	2479	1.023	0.654	≥0.5	Pass

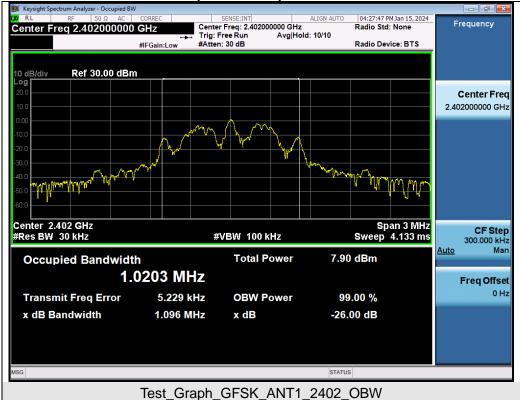


Test Graphs of Occupied Bandwidth





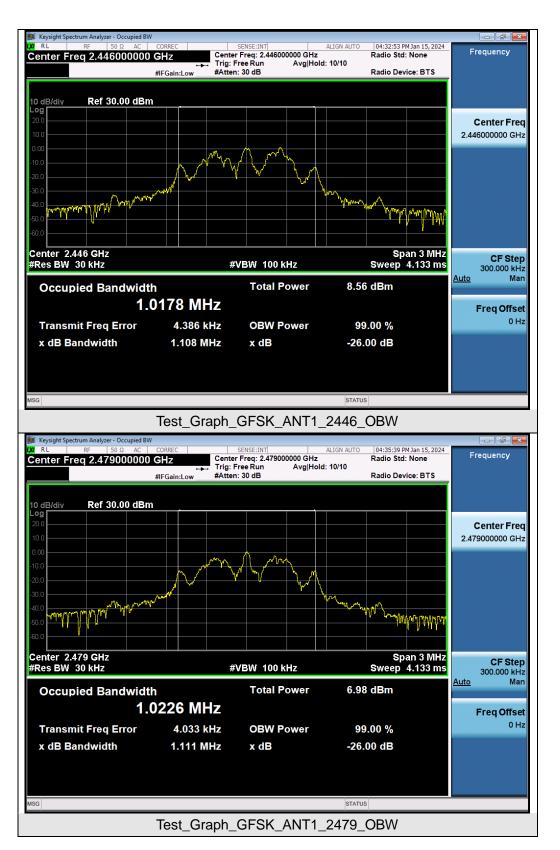




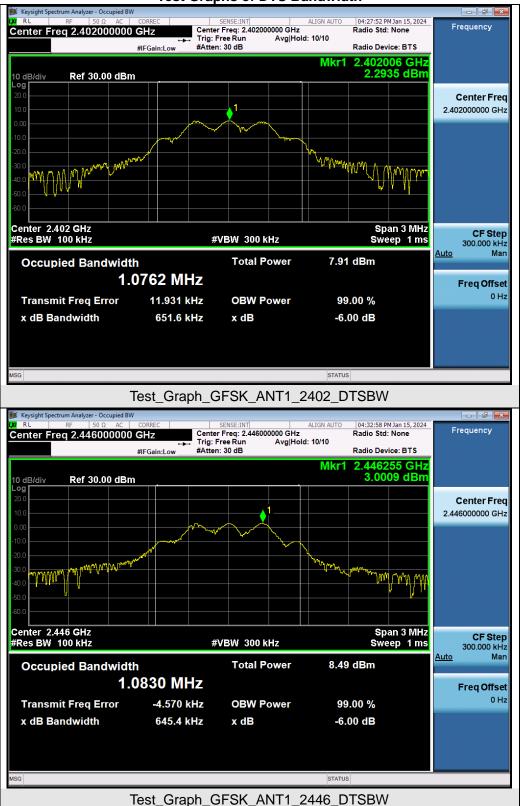

Test Graphs of DTS Bandwidth



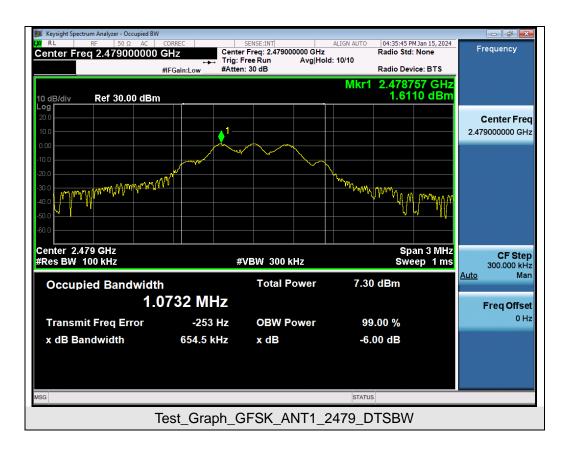



9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

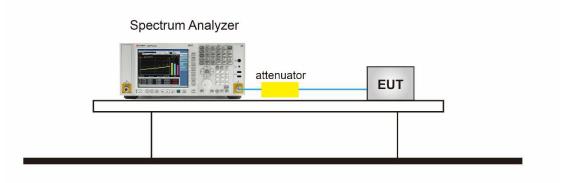



9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density				
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
	2402	-11.361	≤8	Pass
GFSK	2446	-11.544	≤8	Pass
	2479	-12.177	≤8	Pass

Test Graphs of Conducted Output Power Spectral Density









10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \ge 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize


10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer

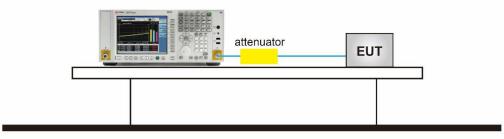




10.4 Measurement Results

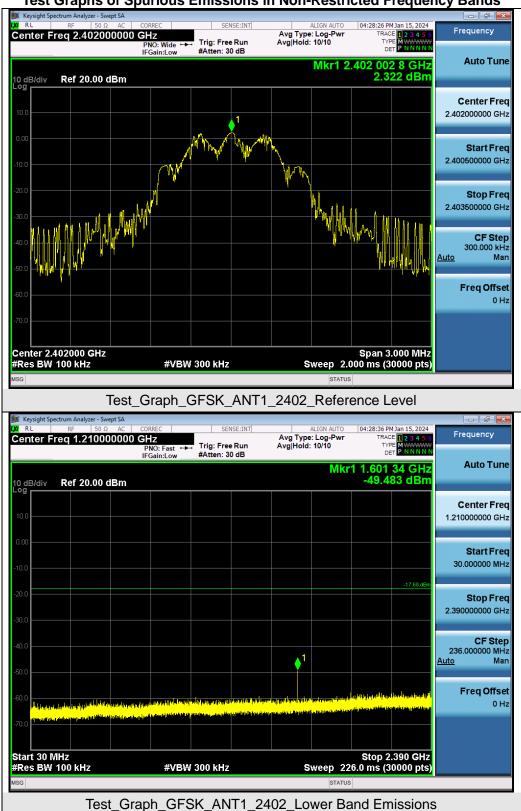


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

Any report having not been signed by aumonzeo Testing/Inspection onzano caleo Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




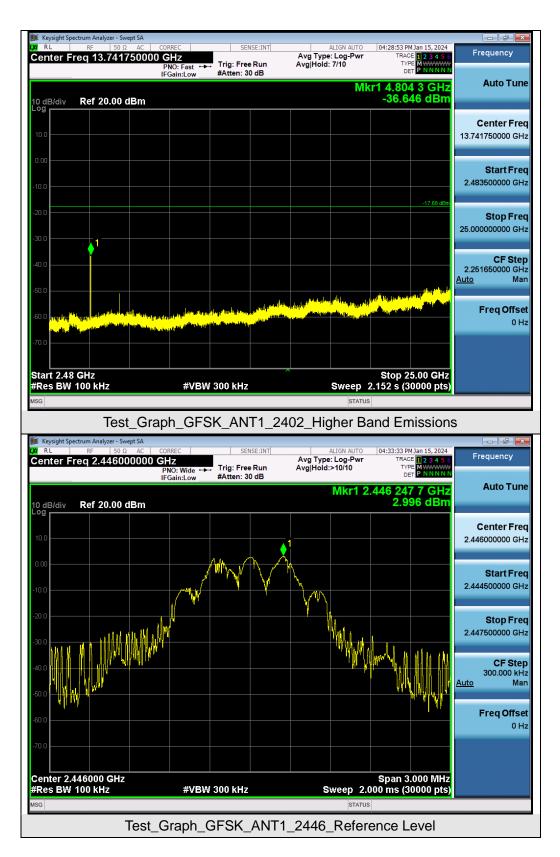




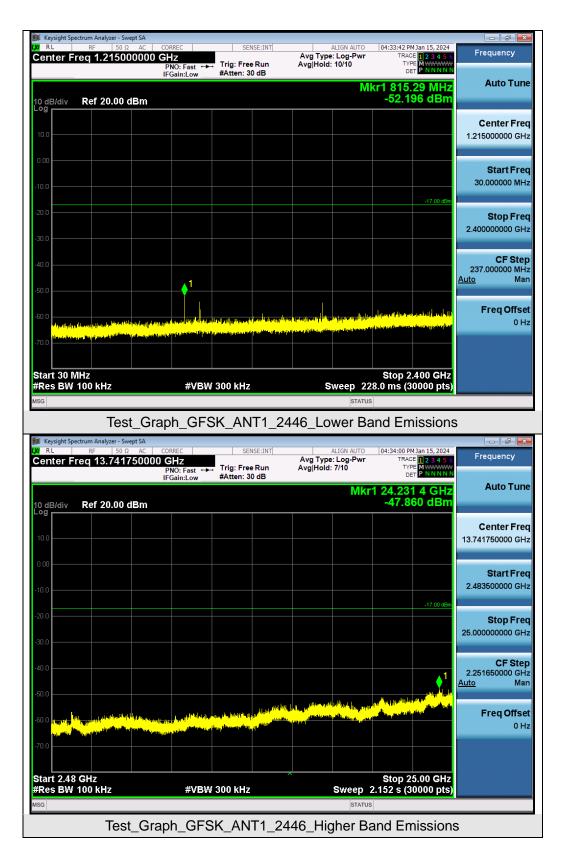




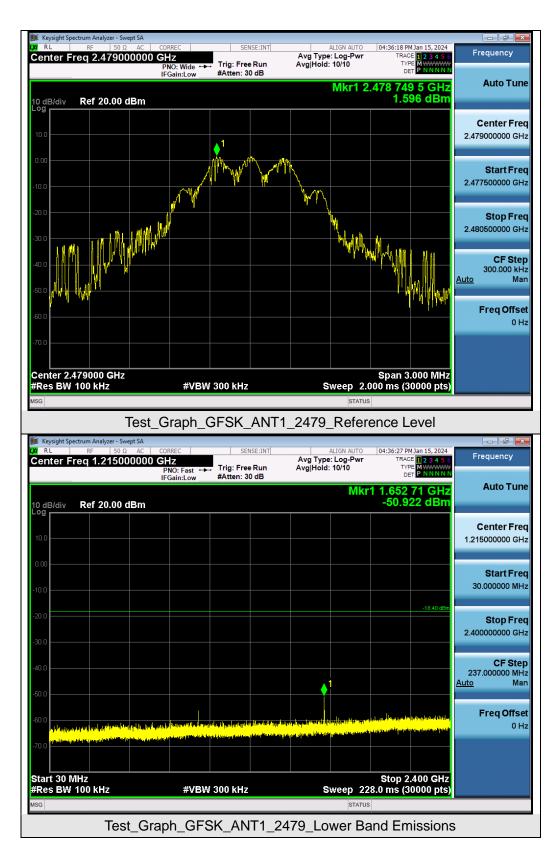



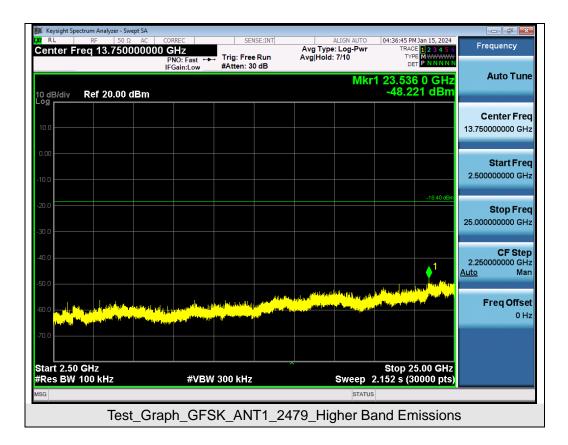



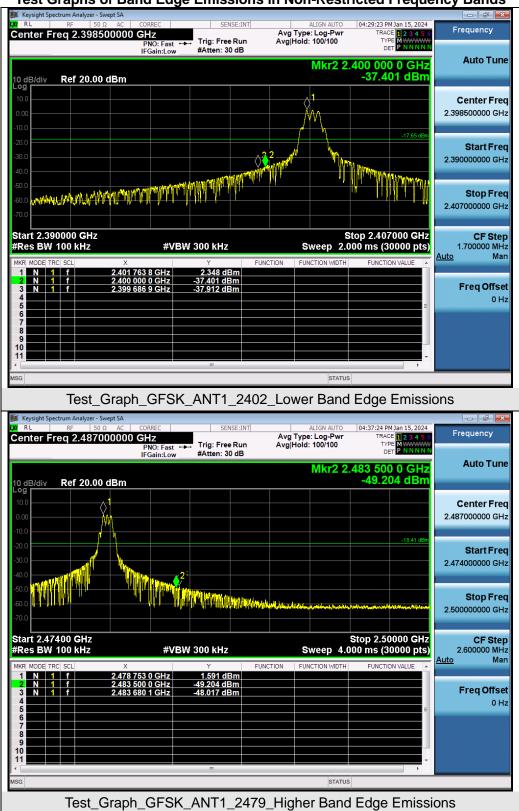

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Any rep Ashang alternative b(provided pther, transmitter aloperates a for is longer than o 0.e4n seconds) e Orbin cases in where is the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum ParameterSettingStart ~Stop Frequency9kHz~150kHz/RB 200Hz for QPStart ~Stop Frequency150kHz~30MHz/RB 9kHz for QPStart ~Stop Frequency30MHz~1000MHz/RB 120kHz for QPStart ~Stop Frequency1GHz~26.5GHzStart ~Stop Frequency1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


<u>Average Measurements above 1GHz (Method VB)</u>

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle \ge 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW \ge 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




11.3 Measurement Setup (Block Diagram of Configuration)




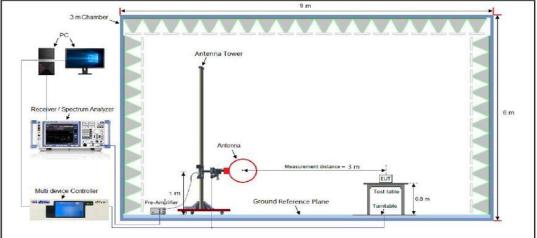

Radiated Emission Test Setup 30MHz-1000MHz

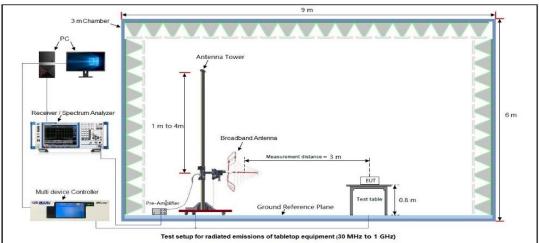

Radiated Emission Test Setup Above 1000MHz

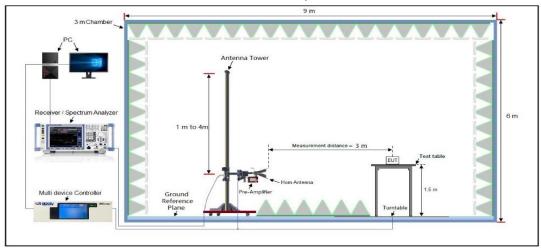

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com




11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz								
EUT Name	Wireles	Wireless Mechanical Keyboard				Model Name Hola 98		98 Pro
Temperature	23.3 ℃	23.3°C				Humidity	60.8%)
Pressure	960hPa	1			Test Volt	age	Norma	al Voltage
Test Mode	Mode 2	2				Polarity	Horizo	•
130				FCC Part 15C				
120								
110								
100 90								
80								
لللل TO								
[W, 70 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 1								
ع 30 40								
30		, M	*3	M		Au us white Martin	man and a mark and a	him the second
20	\sim		why m	MANN WWW	Mart Marth Marthan	Munical Market Mark	Coperty .	
10 0								
-10 30N	4		100M					1G
301	1		TUUM	Frequency[Hz]				16
	QP Limit QP Detector	Horizontal PK						
Suspected	Data List							
	Freq.	Level	Factor	Limit	Margin	Height	Angle	Polarity
	FR 41 1 3		[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polanty
NO.	[MHz]	[dBµV/m]						
NO. 1	[MHz] 35.82	26.04	11.52	40.00	13.96	100	10	Horizontal
							10 290	Horizontal Horizontal
1	35.82	26.04	11.52	40.00	13.96	100		
1 2	35.82 66.86	26.04 33.88	11.52 15.67	40.00 40.00	13.96 6.12	100 100	290	Horizontal
1 2 3	35.82 66.86 100.81	26.04 33.88 31.79	11.52 15.67 17.03	40.00 40.00 43.50	13.96 6.12 11.71	100 100 100	290 140	Horizontal Horizontal





UT Name	Wireles	Wireless Mechanical Keyboard				ame	Hola 9	8 Pro
emperature	23.3 ℃					Humidity	60.8%	
ressure	960hPa					age	Norma	al Voltage
est Mode	Mode 2				Antenna	Polarity	Vertica	al
130				FCC Part 15C				
120								
100								
90								
80 E 70								
Š /0								
留 60								
[씨, 70 [비가/기업] 60 50								
면 60 								6
40	* *2	~ ~ * * ~					aman the second	
40 30 20	* *	ť,		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	man man	When March and and a start and	married the second second	
40	*1*2	t		~W	M	When Who and a start of the	matin	Anger Barry and Party and
40 30 20 10 0 -10	*'*		100M	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	matter and a second	We when the	and the second	16
40 30 20 10 0	*'*		100M	Frequency[Hz]	man	Wind Marine Marine	n and the second	16
40 30 20 10 0 -10	QP Limit QP Delector	Vertical PK	100M	Frequency[Hz]	Mar Marine	Werner Market Market	un the second	16
40 30 20 10 0 -10	QP Detector		100M	Frequency[Hz]	Mar	Werman Markan and Marka		16
40 30 20 10 0 -10 30M	QP Detector Data List Freq.	- Vertical PK	Factor	Limit	Margin	Height	Angle	1G Polarity
40 30 20 10 -10 30M Suspected I NO.	QP Detector Data List Freq. [MHz]	Vertical PK	Factor [dB]	Limit [dBµV/m]	[dB]	[cm]	[°]	Polarity
40 30 20 10 -10 30M Suspected I NO. 1	P Detector Data List Freq. [MHz] 32.91	– Vertical PK Level [dBµV/m] 26.48	Factor [dB] 12.41	Limit [dBµV/m] 40.00	[dB] 13.52	[cm] 100	[°] 160	Polarity Vertical
40 30 20 10 0 -10 30M Suspected I NO. 1 2	* QP Detector Data List Freq. [MHz] 32.91 44.55	Vertical PK Level [dBµV/m] 26.48 26.03	Factor [dB] 12.41 12.51	Limit [dBµV/m] 40.00 40.00	[dB] 13.52 13.97	[cm] 100 100	[°] 160 220	Polarity Vertical Vertical
40 30 20 10 0 -10 30M	* QP Detector Data List Freq. [MHz] 32.91 44.55 62.98		Factor [dB] 12.41 12.51 16.92	Limit [dBµV/m] 40.00 40.00 40.00	[dB] 13.52 13.97 12.48	[cm] 100 100 100	[°] 160 220 180	Polarity Vertical Vertical Vertical
40 30 20 10 0 -10 30M Suspected I NO. 1 2	* QP Detector Data List Freq. [MHz] 32.91 44.55	Vertical PK Level [dBµV/m] 26.48 26.03	Factor [dB] 12.41 12.51	Limit [dBµV/m] 40.00 40.00	[dB] 13.52 13.97	[cm] 100 100	[°] 160 220	Polarity Vertical Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes had been pre-tested. The mode 2 is the worst case and recorded in the report.



EUT Name		Wireless Mechanical Keyboard			Model Name		Hola 98 P	Hola 98 Pro	
Temperature		23.3 ℃			Relat	Relative Humidity		60.8%	
Pressure		960hPa			Test \	/oltage	Normal Vo	oltage	
Test Mode		Mode 1			Anter	na Polarity	Horizonta	l	
							·		
Frequency	Met	er Reading	Factor	Emissio	n Level	Limits	Margin	Value Type	
(MHz)		(dBµV)	(dB)	(dBµ\	//m)	(dBµV/m)	(dB)	value Type	
4804.000		45.49	0.08	45.5	57	74	-28.43	peak	
4804.000		36.64	0.08	36.7	72	54	-17.28	AVG	
7206.000		41.57	2.21	43.7	78	74	-30.22	peak	
7206.000		31.86	2.21	34.0	07	54	-19.93	AVG	
Remark:									
Factor = Anter	I nna Fa		e Loss – Pre- lechanical Key	•	Mode	I Name	Hola 98 P	ro	
Factor = Anter EUT Name	nna Fa			•		I Name ive Humidity	Hola 98 P 60.8%	ro	
Factor = Anter EUT Name Temperature	I nna Fa	Wireless M		•	Relat			-	
Factor = Anter EUT Name Temperature Pressure	I nna Fa	Wireless M 23.3°C		•	Relat	ive Humidity	60.8%	-	
Factor = Anter EUT Name Femperature Pressure Fest Mode		Wireless M 23.3°C 960hPa Mode 1	lechanical Key	board	Relati Test V Anter	ive Humidity /oltage nna Polarity	60.8% Normal Vo Vertical	-	
Factor = Anter EUT Name Femperature Pressure Fest Mode		Wireless M 23.3°C 960hPa Mode 1 er Reading	lechanical Key Factor	board	Relati Test V Anter	ive Humidity /oltage nna Polarity	60.8% Normal Vo Vertical Margin	-	
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz)		Wireless M 23.3℃ 960hPa Mode 1 er Reading (dBµV)	lechanical Key Factor (dB)	Emission (dBµ\	Relati Test V Anter n Level //m)	ive Humidity /oltage ma Polarity Limits (dBµV/m)	60.8% Normal Vo Vertical Margin (dB)	Value Type	
Factor = Anter		Wireless M 23.3℃ 960hPa Mode 1 er Reading (dBµV) 45.68	Factor (dB) 0.08	Emission (dBµ\ 45.7	Relati Test V Anter n Level //m) 76	Limits (dBµV/m) 74	60.8% Normal Vo Vertical Margin (dB) -28.24	Utage Value Type peak	
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4804.000 4804.000		Wireless M 23.3℃ 960hPa Mode 1 er Reading (dBµV) 45.68 35.84	Factor (dB) 0.08 0.08	Emission (dBµ\ 45.7 35.9	Relati Test V Anter n Level //m) 76	Limits (dBµV/m) 74 54	60.8% Normal Vo Vertical Margin (dB) -28.24 -18.08	Value Type peak AVG	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000		Wireless M 23.3℃ 960hPa Mode 1 er Reading (dBµV) 45.68	Factor (dB) 0.08	Emission (dBµ\ 45.7	Relati Test V Anter n Level //m) 76 92 54	Limits (dBµV/m) 74	60.8% Normal Vo Vertical Margin (dB) -28.24	Value Type	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000		Wireless M 23.3℃ 960hPa Mode 1 er Reading (dBµV) 45.68 35.84 42.43	Factor (dB) 0.08 0.08 2.21	Emission (dBµ\ 45.7 35.9 44.6	Relati Test V Anter n Level //m) 76 92 54	Limits (dBµV/m) 74 54 74	60.8% Normal Vo Vertical Margin (dB) -28.24 -18.08 -29.36	Value Type Peak AVG peak	

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



EUT Name		Wireless Mechanical Keyboard			Mode	I Name	Hola 98 Pro	
Temperature		23.3 °C			Relati	elative Humidity 60.8%		
Pressure	ure 960hPa		Test \	/oltage	Normal Vo	oltage		
Test Mode		Mode 2			Anter	nna Polarity	Horizonta	I
Frequency	Met	ter Reading	Factor	Emissio	n Level	Limits	Margin	
(MHz)		(dBµV)	(dB)	(dBµ\	//m)	(dBµV/m)	(dB)	Value Type
4892.000		46.57	0.14	46.7	71	74	-27.29	peak
4892.000		36.94	0.14	37.0	08	54	-16.92	AVG
7338.000		42.42	2.36	44.7	78	74	-29.22	peak
7338.000		33.56	2.36	35.9	92	54	-18.08	AVG
Remark:								
Factor = Anter	nna Fa	actor + Cable	e Loss – Pre-	amplifier.				
EUT Name		Wireless M	echanical Key	/board	Model Name		Hola 98 Pro	
T		· · ·			Relati	ive Humidity	60.8%	
remperature		23.3 ℃				ve mannanty	00.070	
		23.3℃ 960hPa				/oltage	Normal Vo	oltage
Pressure					Test \			oltage
Pressure Test Mode		960hPa Mode 2			Test \ Anter	/oltage nna Polarity	Normal Vo Vertical	bltage
Pressure Test Mode Frequency	Met	960hPa Mode 2 er Reading	Factor	Emissio	Test \ Anter	/oltage na Polarity Limits	Normal Vo Vertical Margin	oltage Value Type
Pressure Test Mode Frequency (MHz)	Met	960hPa Mode 2 er Reading (dBµV)	(dB)	(dBµ\	Test \ Anter n Level //m)	/oltage nna Polarity Limits (dBµV/m)	Normal Vo Vertical Margin (dB)	- Value Type
Pressure Test Mode Frequency (MHz) 4892.000	Met	960hPa Mode 2 er Reading (dBµV) 46.45	(dB) 0.14	(dBµ\ 46.5	Test \ Anter n Level //m) 59	/oltage nna Polarity Limits (dBµV/m) 74	Normal Vo Vertical Margin (dB) -27.41	- Value Type peak
Pressure Test Mode Frequency (MHz) 4892.000 4892.000	Met	960hPa Mode 2 er Reading (dBμV) 46.45 35.63	(dB) 0.14 0.14	(dBµ\ 46.5 35.7	Test \ Anter n Level //m) 59 77	/oltage nna Polarity Limits (dBµV/m) 74 54	Normal Vo Vertical Margin (dB) -27.41 -18.23	- Value Type peak AVG
Pressure Test Mode Frequency (MHz) 4892.000 4892.000 7338.000	Met	960hPa Mode 2 er Reading (dBµV) 46.45 35.63 41.49	(dB) 0.14 0.14 2.36	(dBµ\ 46.5 35.7 43.8	Test \ Anter n Level //m) 59 77 35	/oltage na Polarity Limits (dBµV/m) 74 54 74	Normal Vo Vertical Margin (dB) -27.41 -18.23 -30.15	Value Type peak AVG peak
(MHz) 4892.000 4892.000	Met	960hPa Mode 2 er Reading (dBμV) 46.45 35.63	(dB) 0.14 0.14	(dBµ\ 46.5 35.7	Test \ Anter n Level //m) 59 77 35	/oltage nna Polarity Limits (dBµV/m) 74 54	Normal Vo Vertical Margin (dB) -27.41 -18.23	- Value Type peak AVG
Pressure Test Mode Frequency (MHz) 4892.000 4892.000 7338.000 7338.000	Met	960hPa Mode 2 er Reading (dBµV) 46.45 35.63 41.49	(dB) 0.14 0.14 2.36	(dBµ\ 46.5 35.7 43.8	Test \ Anter n Level //m) 59 77 35	/oltage na Polarity Limits (dBµV/m) 74 54 74	Normal Vo Vertical Margin (dB) -27.41 -18.23 -30.15	Value Type peak AVG peak
Pressure Test Mode Frequency (MHz) 4892.000 4892.000 7338.000		960hPa Mode 2 er Reading (dBµV) 46.45 35.63 41.49 32.58	(dB) 0.14 0.14 2.36 2.36	(dBµ\ 46.5 35.7 43.8 34.9	Test \ Anter n Level //m) 59 77 35	/oltage na Polarity Limits (dBµV/m) 74 54 74	Normal Vo Vertical Margin (dB) -27.41 -18.23 -30.15	Value Type peak AVG peak

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass


Pressure960hPaTest VoltageNormal VoltageTest ModeMode 3Antenna PolarityHorizontalFrequencyMeter ReadingFactorEmission LevelLimitsMargin (dBµV/m)Value Typ(MHz)(dBµV)(dB)(dBµV/m)(dB)Value Typ4958.00046.450.2246.6774-27.33peak4958.00037.870.2238.0954-15.91AVG7437.00042.592.6445.2374-28.77peak7437.00032.632.6435.2754-18.73AVGRemark:Factor = Antenna Factor + Cable Loss – Pre-amplifier.Image: Comparison of the test of tes	EUT Name		Wireless Mechanical Keyboard			Model Name		Hola 98 Pro	
Test Mode Mode 3 Antenna Polarity Horizontal Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4958.000 46.45 0.22 46.67 7.4 -27.33 peak 4958.000 37.87 0.22 38.09 54 -15.91 AVG 7437.000 42.59 2.64 45.23 74 -28.77 peak 7437.000 32.63 2.64 35.27 54 -18.73 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Image: Case of the second	Temperature	rature 23.3℃			Relative Humidity		60.8%		
Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4958.000 46.45 0.22 46.67 74 -27.33 peak 4958.000 37.87 0.22 38.09 54 -15.91 AVG 7437.000 42.59 2.64 45.23 74 -28.77 peak 7437.000 32.63 2.64 35.27 54 -18.73 AVG Remark:	Pressure	ssure 960hPa		Test Vo	oltage	Normal Vol	tage		
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4958.000 46.45 0.22 46.67 74 -27.33 peak 4958.000 37.87 0.22 38.09 54 -15.91 AVG 7437.000 42.59 2.64 45.23 74 -28.77 peak 7437.000 32.63 2.64 35.27 54 -18.73 AVG Remark:	Test Mode		Mode 3			Anteni	na Polarity	Horizontal	
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4958.000 46.45 0.22 46.67 74 -27.33 peak 4958.000 37.87 0.22 38.09 54 -15.91 AVG 7437.000 42.59 2.64 45.23 74 -28.77 peak 7437.000 32.63 2.64 35.27 54 -18.73 AVG Remark:									
(MH2) (dBμV) (dB) (dBμV/m) (dBμV/m) (dB) (dB) 4958.000 46.45 0.22 46.67 74 -27.33 peak 4958.000 37.87 0.22 38.09 54 -15.91 AVG 7437.000 42.59 2.64 45.23 74 -28.77 peak 7437.000 32.63 2.64 35.27 54 -18.73 AVG Remark:	Frequency	Met	er Reading	Factor	Emissi	on Level	Limits	Margin	
4958.000 37.87 0.22 38.09 54 -15.91 AVG 7437.000 42.59 2.64 45.23 74 -28.77 peak 7437.000 32.63 2.64 35.27 54 -18.73 AVG Remark:	(MHz)		(dBµV)	(dB)	(dBµ	ıV/m)	(dBµV/m)	(dB)	value Type
T437.000 42.59 2.64 45.23 74 -28.77 peak 7437.000 32.63 2.64 35.27 54 -18.73 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Model Name Hola 98 Pro Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Temperature 23.3°C Relative Humidity 60.8% Pressure 960hPa Test Voltage Normal Voltage Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Typ 4958.000 37.49 0.22 37.71 54 -16.29 AVG 7437.000 31.75 2.64 34.39 54 -19.61 AVG	4958.000		46.45	0.22	46	.67	74	-27.33	peak
7437.000 32.63 2.64 35.27 54 -18.73 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. BEUT Name Wireless Mechanical Keyboard Model Name Hola 98 Pro Temperature 23.3°C Relative Humidity 60.8% Pressure 960hPa Test Voltage Normal Voltage Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Typ AvG 4958.000 37.49 0.22 37.71 54 -16.29 AvG 7437.000 41.47 2.64 34.39 54 -19.61 AvG	4958.000		37.87	0.22	38	.09	54	-15.91	AVG
Image: Normal state Image: Normal state	7437.000		42.59	2.64	45	.23	74	-28.77	peak
Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameWireless Mechanical KeyboardModel NameHola 98 ProTemperature23.3 °CRelative Humidity60.8%Pressure960hPaTest VoltageNormal Voltage960hPaMode 3Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMarginYalue Typ(MHz)(dBµV)(dB)(dBµV/m)(dBµV/m)(dB)4958.00037.490.2237.7154-16.29AVG7437.00041.472.6444.1174-29.89peak7437.00031.752.6434.3954-19.61AVG	7437.000		32.63	2.64	35	.27	54	-18.73	AVG
Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameWireless Mechanical KeyboardModel NameHola 98 ProTemperature23.3°CRelative Humidity60.8%Pressure960hPaTest VoltageNormal VoltageTest ModeMode 3Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMargin(MHz)(dBµV)(dB)(dBµV/m)(dBµV/m)(dB)Value Typ(MHz)(dBµV)0.2237.7154-16.29AVG7437.00041.472.6444.1174-29.89peak7437.00031.752.6434.3954-19.61AVG									
Temperature 23.3 °C Relative Humidity 60.8% Pressure 960hPa Test Voltage Normal Voltage Test Mode Mode 3 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4958.000 46.66 0.22 46.88 74 -27.12 peak 4958.000 37.49 0.22 37.71 54 -16.29 AVG 7437.000 31.75 2.64 34.39 54 -19.61 AVG		na Fa	actor + Cable	e Loss – Pre-	amplifier.				
Pressure 960hPa Test Voltage Normal Voltage Test Mode Mode 3 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Typ 4958.000 46.66 0.22 46.88 74 -27.12 peak 4958.000 37.49 0.22 37.71 54 -16.29 AVG 7437.000 41.47 2.64 44.11 74 -29.89 peak 7437.000 31.75 2.64 34.39 54 -19.61 AVG	EUT Name		Wireless Me	echanical Key	/board	Model Name Hola 98 Pro)	
Test Mode Mode 3 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4958.000 46.66 0.22 46.88 74 -27.12 peak 4958.000 37.49 0.22 37.71 54 -16.29 AVG 7437.000 41.47 2.64 44.11 74 -29.89 peak 7437.000 31.75 2.64 34.39 54 -19.61 AVG	Temperature		23.3 ℃			Relative Humidity		60.8%	
Frequency Meter Reading Factor Emission Level Limits Margin Value Typ (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Typ 4958.000 46.66 0.22 46.88 74 -27.12 peak 4958.000 37.49 0.22 37.71 54 -16.29 AVG 7437.000 41.47 2.64 44.11 74 -29.89 peak 7437.000 31.75 2.64 34.39 54 -19.61 AVG - - - - - - -	Pressure		960hPa			Test Vo	oltage	Normal Voltage	
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) (dBµV/m) (dB) (dBµV/m) (dB)	Test Mode		Mode 3			Anteni	na Polarity	Vertical	
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) value typ 4958.000 46.66 0.22 46.88 74 -27.12 peak 4958.000 37.49 0.22 37.71 54 -16.29 AVG 7437.000 41.47 2.64 44.11 74 -29.89 peak 7437.000 31.75 2.64 34.39 54 -19.61 AVG	-			E			1.1	Must	1
4958.000 46.66 0.22 46.88 74 -27.12 peak 4958.000 37.49 0.22 37.71 54 -16.29 AVG 7437.000 41.47 2.64 44.11 74 -29.89 peak 7437.000 31.75 2.64 34.39 54 -19.61 AVG		IVIET						-	Value Type
4958.000 37.49 0.22 37.71 54 -16.29 AVG 7437.000 41.47 2.64 44.11 74 -29.89 peak 7437.000 31.75 2.64 34.39 54 -19.61 AVG	. ,						, , ,	. ,	neak
7437.000 41.47 2.64 44.11 74 -29.89 peak 7437.000 31.75 2.64 34.39 54 -19.61 AVG				-					
7437.000 31.75 2.64 34.39 54 -19.61 AVG									-
Remark:									
Remark:									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.	Remark [.]								

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.





EUT Name	Wireless Mechanical Keyboard	Model Name	Hola 98 Pro
Temperature	23.3℃	Relative Humidity	60.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

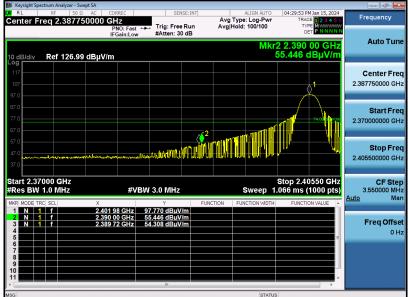

Test Graph for Average Measurement



RESULT: Pass



EUT Name	Wireless Mechanical Keyboard	Model Name	Hola 98 Pro
Temperature	23.3 ℃	Relative Humidity	60.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical




Test Graph for Peak Measurement

Test Graph for Average Measurement




RESULT: Pass






EUT Name	Wireless Mechanical Keyboard	Model Name	Hola 98 Pro
Temperature	23.3 ℃	Relative Humidity	60.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

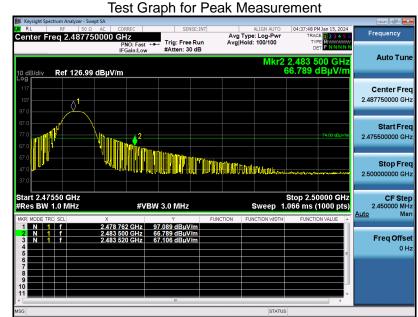

Test Graph for Average Measurement



RESULT: Pass





EUT Name	Wireless Mechanical Keyboard	Model Name	Hola 98 Pro
Temperature	23.3 ℃	Relative Humidity	60.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical





Test Graph for Average Measurement



RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


Frequency	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

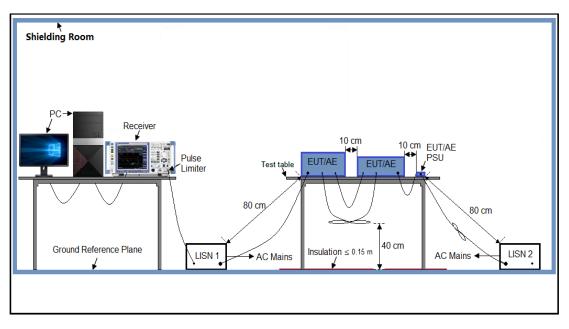



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



12.5 Measurement Results

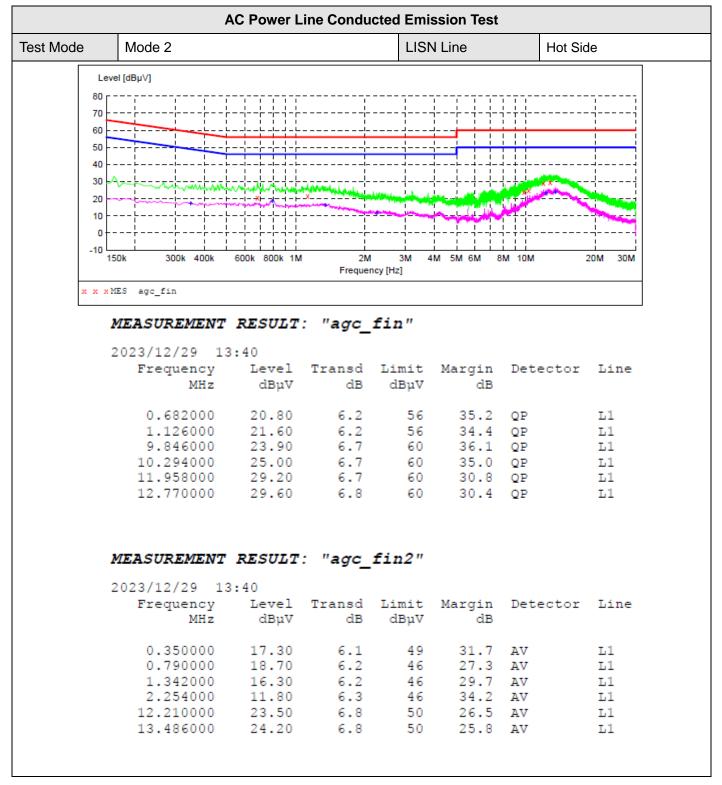

RESULT: Pass


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com
 Web: http://www.agccert.com/



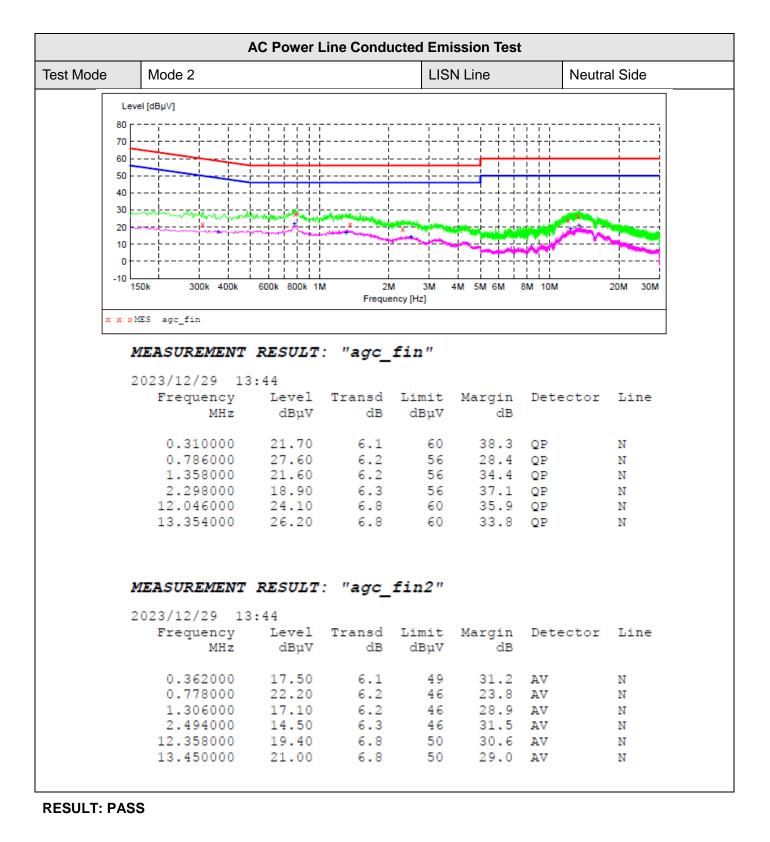



Report No.: AGC13779231202FR03 Page 52 of 52

Appendix I: Photographs of Test Setup Refer to the Report No.: AGC13779231202AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC13779231202AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.