


Appendix A. Setup Photographs

Front View

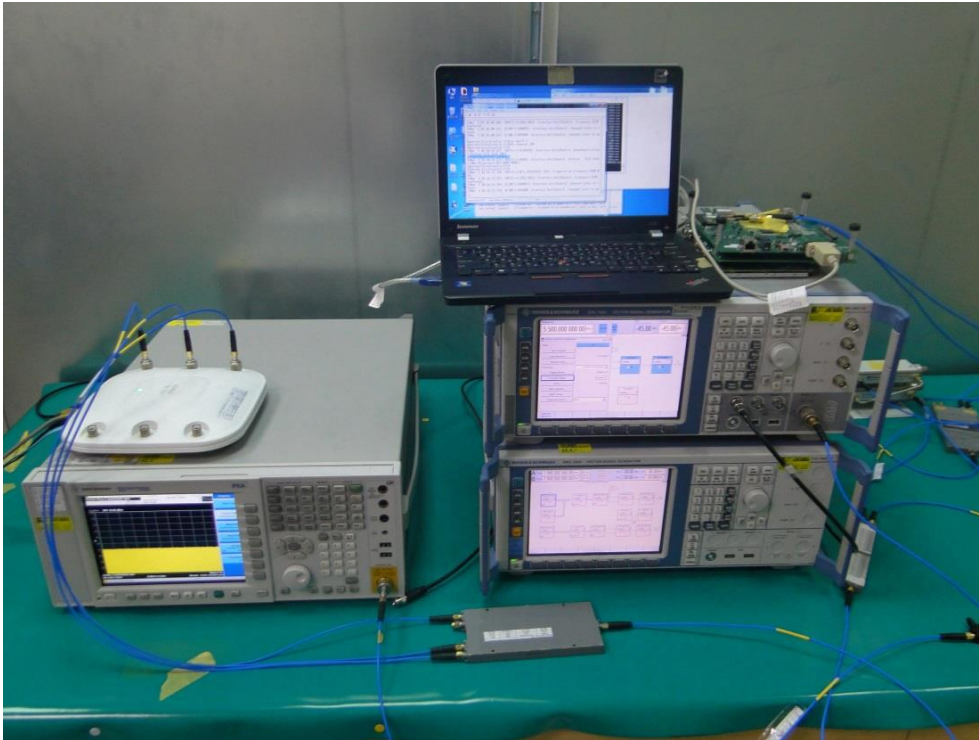

EUT

```
root@am335x-evm:~# ifconfig wlan0 up
root@am335x-evm:~# ifconfig wlan0
wlan0
Link encap:Ethernet HWaddr 5C:31:3E:56:F0:B1
inet addr:192.168.0.20 Bcast:192.168.0.255 Mask:255.255.255.0
UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
RX packets:3 errors:0 dropped:1 overruns:0 frame:0
TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
collisions:0 txqueuelen:1000
RX bytes:192 (192.0 B) TX bytes:0 (0.0 B)

root@am335x-evm:~# iw wlan0 link
Connected to 20:bb:c0:ac:41:40 (on wlan0)
SSID: CISCO
freq: 5300
RX: 1292 bytes (19 packets)
TX: 246 bytes (4 packets)
signal: -47 dBm
tx bitrate: 6.0 MBit/s

bss flags: short-slot-time
dtim period: 2
beacon int: 102
root@am335x-evm:~#
```